



Department of
Design and
Construction

PROJECT ID: LNXEA08BX

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

LAW

VOLUME 1 OF 3

BID BOOKLET

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR:

Two (2) Bronx Branch Libraries - Replacement of HVAC & BMS

LOCATION:
BOROUGH:
CITY OF NEW YORK

2150 University Ave and 1215 Morrison Ave
Bronx 10453 and 10472

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

NYPL

Greenman Pederson Inc.



Date: July 10, 2017

18-003



**Department of
Design and
Construction**

Ana Barrio
Acting Commissioner

Justin Walter
Chief Administrative Officer
Administration

May 04, 2018

CERTIFIED MAIL - RETURN RECEIPT REQUEST
CDE AIR CONDITIONING CO.
321 39th Street
Brooklyn, NY 11232

RE: FMS ID: LNXEA08BX
E-PIN: 85017B0124001
DDC PIN: 8502017LN0027C
Two(2) Bronx Branch Libraries -
Replacement of HVAC & BMS -
NOTICE OF AWARD

Dear Contractor:

You are hereby awarded the above referenced contract based upon your bid in the amount of \$1,754,379.00 submitted at the bid opening on January 11, 2018. Within ten (10) days of your receipt of this notice of award, you are required to take the actions set forth in Paragraphs (1) through (3) below. For your convenience, attached please find a copy of Schedule A of the General Conditions to the Contract, which sets forth the types and amounts of insurance coverage required for this contract.

- (1) Execute two copies of the Agreement in the Contracts Unit, 30-30 Thomson Avenue, 1st Floor, Long Island City, New York (IDCNY Building). A Commissioner of Deeds will be available to witness and notarize your signature. The Agreement must be signed by an officer of the corporation or a partner of the firm.
- (2) Submit to the Contracts Unit two properly executed performance and payment bonds. If required for this contract, copies of performance and payment bonds are attached.
- (3) Submit to the Contracts Unit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by New York State Law. The insurance documentation specified in this paragraph is required for registration of the contract with the Comptroller's Office.



**Department of
Design and
Construction**

On or before the contract commencement date, you are required to submit all other certificates of insurance and/or policies in the types and amounts required by Schedule A. Such certificates of insurance and/or policies must be submitted to the Agency Chief Contracting Office, Attention: Risk Manager, Fourth Floor at the above indicated department address.

Your attention is directed to the section of the Information for Bidders entitled "Failure to Execute Contract". As indicated in this section, in the event you fail to execute the contract and furnish the required bonds within the (10) days of your receipt of this notice of award, your bid security will be retained by the City and you will be liable for the difference between your bid price and the price for which the contract is subsequently awarded, less the amount of the bid security retained.

Sincerely,

A handwritten signature in black ink, appearing to read 'Michael Shipman'. The signature is written in a cursive, flowing style.

Michael Shipman
Director of Contracts

NOTICE TO BIDDERS:

- **PROJECT LABOR AGREEMENT:** This contract is subject to a Project Labor Agreement (“PLA”) entered into between the City and the Building and Construction Trades Council of Greater New York (“BCTC”) affiliated Local Unions. By submitting a bid, the Contractor agrees that the PLA is binding on the Contractor and all subcontractors of all tiers. The bidder to be awarded the contract will be required to execute a “Letter of Assent” prior to award.

The Bidder is advised to review the following: (1) Notice regarding the PLA, (2) the PLA, and (3) the Letter of Assent, all of which are set forth at the beginning of Volume 2 of the Contract Documents.

- **SINGLE CONTRACT:** As stated above, this contract is subject to a PLA. The requirements of the Wicks Law for separate prime contractors DO NOT APPLY to any project that is covered by a PLA. Accordingly, the requirements of the Wicks Law for separate prime contractors do not apply to this Project. The Project consists of a single contract, the Contract for General Construction Work.

The Bidder is advised to review the Notice set forth at the beginning of Volume 2 of the Contract Documents. The Notice specifies revisions to the Contract Documents to provide that the Project consists of a single contract and to delete any and all references to separate prime contractors.

SPECIAL NOTICE TO BIDDERS

The New York City Department of Small Business Services (SBS), in conjunction with the New York Business Development Corporation (NYBDC), have established a NYC Construction Loan pilot program to provide prime contractors and subcontractors financing for mobilization costs on certain City construction projects.

Under this initiative, loans are available for early stage mobilization needs such as insurance, labor, supplies and equipment. Bidders are strongly encouraged to visit "Growing Your Business" at www.nyc.gov/nycbusiness to learn more about the loan or contact constructionloan@sbs.nyc.gov / (212) 513-6444 to obtain details and to determine preliminary eligibility.

A successful loan applicant will be required to make an assignment of its contract (or subcontract) payments to the lender NYBDC until the loan is repaid. If the loan is to a subcontractor, a prime contractor must honor the terms of such an assignment.

A prime contractor may not discriminate against a subcontractor or potential subcontractor by reason of the subcontractor's participation, or nonparticipation, in the NYC Construction Loan program.

PRE BID QUESTIONS (PBQs):

- Please be advised that PBQ's should be submitted to the Agency Contact Person at least five (5) business days (by 5:00 P.M. EST) prior to the bid opening date as indicated in ATTACHMENT 1 – BID INFORMATION, Attachment 1, VOLUME 1 of 3 of this BID PACKAGE.

THIS PAGE INTENTIONALLY LEFT BLANK

**BID BOOKLET
PART A**

THIS PAGE INTENTIONALLY LEFT BLANK

PROJECT ID: LNXEA08BX

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

BID BOOKLET

TABLE OF CONTENTS

PART A		page
1.	Special Notice to Bidders.....	2
2.	M/WBE Program: M/WBE Utilization Plan.....	5
3.	Bid Form.....	10
4.	Affirmation.....	15
5.	Bidder's Identification of Subcontractors.....	16
6.	Bid Bond.....	18
7.	Contractor's Bid Breakdown	21
8.	Attachment 1 - Bid Information.....	22
 PART B		
9.	Safety Questionnaire.....	23
10.	Pre-Award Process	26
11.	Project Reference Form.....	28
12.	Contract Certificate.....	31
13.	Confirmation of Vendex Compliance.....	32
14.	Iran Divestment Act Compliance Report.....	33
15.	Construction Employment Report.....	35

**CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS
SPECIAL NOTICE TO BIDDERS**

BID SUBMISSION REQUIREMENTS

THE BID SHALL CONSIST OF TWO (2) SEPARATE, SEALED ENVELOPES. THE DOCUMENTS THAT MUST BE COMPLETED AND INCLUDED IN EACH SEPARATE ENVELOPE ARE LISTED BELOW.

BID ENVELOPE #1: Bid Envelope #1 shall contain the following items:

- Bid Form, including Affirmation
- Bid Security (if required, see page 22)
- Schedule B: M/WBE Utilization Plan (if participation goals have been established)

BID ENVELOPE #2: Bid Envelope #2 shall contain **ONLY** the following item:

- Bidder's Identification of Subcontractors (see pages 16 & 17)

**FAILURE TO SUBMIT THE FOUR ITEMS LISTED ABOVE
WILL RESULT IN THE DISQUALIFICATION OF THE BID**

BID ENVELOPE #1: In addition to the items listed above, Bid Envelope #1 shall also contain the following items: **DO NOT** Include the items listed below in Bid Envelope #2.

- Bid Breakdown (if required, see page 21)
- Safety Questionnaire
- Construction Employment Report (if bid is \$1,000,000 or more)
- Contract Certificate (if bid is less than \$1,000,000)
- Confirmation of Vendex Compliance
- Bidder's Certification of Compliance with Iran Divestment Act
- Special Experience Requirements Qualification Form (if required, see pages 3, 4)
- Any Addenda issued prior to the receipt of bids

**FAILURE TO SUBMIT THE EIGHT ITEMS LISTED ABOVE
MAY RESULT IN THE DISQUALIFICATION OF THE BID.**

- NOTES:**
- (1) All of the above referred to blank forms to be completed and submitted with the bid are included in the BID BOOKLET.
 - (2) If the bidder has any questions or requires additional information, please contact the Department of Design and Construction by phone (718-391-2601) or by fax (718-391-2627).
 - (3) **VENDEX QUESTIONNAIRES:** Vendex Questionnaires, as well as detailed instructions, may be obtained at www.nyc.gov/vendex. The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.
 - (4) **SPECIAL EXPERIENCE REQUIREMENTS:** The Bidder is advised that Special Experience Requirements may apply to this contract. Such requirements are set forth on pages 3 and 4 of this Bid Booklet.
 - (5) **SPECIAL EXPERIENCE REQUIREMENTS FOR ASBESTOS:** The Bidder is advised that this contract contains strict requirements regarding the prior experience and licensing of the subcontractor who will perform any required asbestos abatement work. These special experience requirements are set forth in the section of the specifications which describes any required asbestos abatement work.

Special Notice to Bidders – Proprietary Items

- A. General: A proprietary item required for the Project is specified below. The contractor is required to provide and install such proprietary item. The Contractor must provide the specified item from the designated manufacturer. Substitutions are not permissible and will not be approved. More detailed information regarding the item is set forth in the Specifications. Such information includes item description, as well as requirements for installation and related materials.
- B. Payment: For the required proprietary item, an allowance amount is indicated. The allowance provides a stipulated amount to reimburse the Contractor for the purchase of the proprietary item from the designated manufacturer. Payment from the allowance shall be limited to the purchase price of the specified proprietary item and shall exclude any costs above and beyond the purchase price. Payment from the allowance shall not include any of the following costs with respect to the specified proprietary item: (1) any mark-up for the Contractor's overhead and profit, (2) any costs for transportation, including delivery, shipping or special handling costs, (3) any costs for installation, and (4) any costs for related materials. Payment for the specified proprietary item shall be based on the invoice actually provided by the manufacturer.
- C. Bid Form: A total allowance amount for the purchase of all required proprietary items is set forth on the Bid Form. In preparing the lump sum portion of its bid, the Contractor shall:
- (1) Exclude from its bid any costs for the purchase of the proprietary items, and
 - (2) Include in its bid any costs above and beyond the purchase price, including without limitation, costs for transportation, delivery, installation, related materials and overhead.
- D. Required Proprietary Item(s):

CONTRACT NO. 1:

1. Proprietary Item: Edwards III Fire Alarm Control Panel
(Francis Martin Branch Library 1-Unit)
Specification Section: 28 31 01
Manufacturer: USC Fire and Security
Allowance Amount: Not to Exceed \$ 15,000
2. Proprietary Item: Honeywell Web Based HVAC/ATC Control System –WEBs System
(Francis Martin Branch Library 1-Unit and Clason's Point Library 1 Unit)
Specification Section: 23 09 23
Manufacturer: Honeywell
Allowance Amount: Not to Exceed \$ 26,500 (ea. system)

3. Proprietary Item: American Auto-Matrix BMS/ Aspect Controller
(Francis Martin Branch Library 1- Unit
Clason' Point Branch Library 1 Unit boiler control and Pumps)
Specification Section: 23 09 23
Manufacturer: American Auto-Matrix
Allowance Amount: Not to Exceed \$ 12,000 (ea. controller)

THIS PAGE INTENTIONALLY LEFT BLANK

Qualification Form

Project ID: LNXEA08BX

List previous projects completed to meet the special experience requirements for this contract. Please photocopy this form for submission of all required projects.

(see attached list of projects completed)

Name of Contractor: _____

Name of Project: _____

Location of Project: _____

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: _____

Title: _____ Phone Number: _____

Brief description of work completed: _____

Was the work performed as a prime or a subcontractor: _____

Amount of Contract: _____

Date of Completion: _____

Name of Contractor: _____

Name of Project: _____

Location of Project: _____

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: _____

Title: _____ Phone Number: _____

Brief description of work completed: _____

Was the work performed as a prime or a subcontractor: _____

Amount of Contract: _____

Date of Completion: _____

**C.D.E. AIR CONDITIONING CO., INC.
PARTIAL LIST OF COMPLETED PROJECTS**

PROJECT NAME AND LOCATION	PROJECT NUMBER	OWNER/CONTACT	TELEPHONE NO.	FINAL CONTRACT PRICE	COMPLETION DATE
Governor's Island Facilities Management Building 110	90088	The I&RO Group Nadia Usmani	(516) 434-9721	1,662,254	March, 2017
NYC College of Technology - NYCCCT Boiler Plant Repairs	ES-GSN080S	The I&RO Group/Ecosystem Marco Barbosa	(516) 214-8472 (347) 901-0278	1,391,706	January, 2017
Pre-K 66 (Staten Island) 1625 Forest Avenue, Staten Island, NY	C000013711	Arnell Construction Cliff Hughes	(718) 852-8500	4,012,000	January, 2017
Bowery Bay WPCP 4301 Berrian Boulevard, Astoria, New York	Project# WP-237 Contract BB-57H	Hazen & Sawyer/NYC DEP Vincent Kopicki	(347) 923-8490	28,719,670	June, 2016
Bowery Bay WPCP Anaerobic Digester Gas System Improvements 4301 Berrian Boulevard, Astoria, New York	Project# WP-237 Contract BB-210	Spectraserv - CDM/NYPA John Kling	(973) 589-0277	2,083,679	April 2016
Metropolitan Hospital Center Energy Conservation HVAC Work	ES-GSN-0543	Parson Brinckerhoff Frank Verril, RA	(212) 423-7881 (917) 658-4811	1,605,768	April, 2016
Dapollio Recreation & John Jay Pool Reconstruction of Boilers	MG-113	NYC Dept. of Parks & Recreation Henry Erhardt	(718) 430-4654 (917) 635-4230	879,676	March, 2016
DEP Digester Gas System Improvement Various Locations - Oakwood Beach, Staten Island 26th Ward & Red Hook, Brooklyn, New York	ES-GSN-0149	Spectraserv - CDM/NYPA John Kling	(973) 589-0277	3,796,308	March, 2016
New York Psychiatric Institute Conversion of 4th Floor to Wet Lab	44220-C	Fratello Construction Steven Cianci	(631) 414-7171	2,392,110	February, 2016
PS 199 (Queens) Annex at St. Teresa 55-15 44th Street, Sunnyside, NY	C000013478	Delric Construction Robert Ricciardi	(973) 427-0058	691,345	February, 2016
United Nations Package 3 - Airside Capital Master Plan	Contract B Package 3	Skanaka USA Building Bryan Kobb Sam Alacha Cell:	(917) 367-2246 (917) 444-0573 (212) 963-2477 (646) 208-1552	9,169,198	February, 2016
120 Schermerhorn Street, Brooklyn, NY Boiler Feedwater System Replacement	Project No. C0281BOIL	NYC DDG Naum Fterson	(212) 386-0669	1,518,657	December, 2015
Manhattan Psychiatric Center Wards Island Manhattan Forensic Relocation Package No. 1	44579	Sea Crest Construction Corp. James Dergin	(516) 868-3000 Cell: (516) 903-6619	347,000	July, 2015
Manhattan Theater Club Renovation at Friedman Theater	PV256-FRI	NYC DDG Charles Lin	(718) 391-1138 (917) 506-0551	790,199	April, 2015
PS 181 (K) 1023 York Avenue, Brooklyn NY	C000013191	Triangle General Contractors Anant Nivraula	(718) 462-2608	19,641	April, 2015
Kingsbridge Heights Community Center Construction of HVAC System	Contract No. XZ50-109MA1	NYC Dept. of Parks & Recreation Fred Hammerling	(718) 760-6643	880,721.00	January, 2015

**C.D.E. AIR CONDITIONING CO., INC.
PARTIAL LIST OF COMPLETED PROJECTS**

PROJECT NAME AND LOCATION	PROJECT NUMBER	OWNER/CONTACT	TELEPHONE NO.	FINAL CONTRACT PRICE	COMPLETION DATE
Manhattan Pumping Station Newtown Creek WPCP	Project # WP-283 Contract NC-40H	Hazen & Sawyer/NYC DEP Alex Klar, P.E.	(718) 609-8701	12,623,793	January, 2015
Queens Children's Library Children's Library Discovery Center	20040018658	Hill International/NYC DDC Marc Zaretsky, Vice President	(212) 244-3700	7,979,398	December 14
United Nations South Screening Building		Skanska USA Building Rak Lavon	(917) 346-3739	76,588	December 14
Queens College Science Building HVAC Work	CTTY-W-CUCF-01-09-04-MECH	STV/CUNY Jeanny Cheung,	(212) 614-3382	478,898	November, 14
102 Precinct Station House New Air Cooled Chiller	CT 1 056 20131420928	NYPD Stephen Sailer, APM III, NYPD	(718) 476-8699 (347) 245-8365	638,138	October, 14
Newtown Creek WPCP, NC-36H 329 Greenpoint Ave., Brooklyn, NY 11222	Project WP-283 Contract NC-36H	Hazen & Sawyer/NYC DEP Stan DiMaris	(718) 609-8703	12,428,503	September, 14
Parks District Headquarters Bushwick Inlet Park Kent Avenue, Between N. 9th Street, Brooklyn, NY	BG-38250-507M	NYC Dept. of Parks Mathias Augustin Lorenzo Calabrese	(718) 760-6828	2,278,477	September, 14
Tavern of the Green Core and Shell Renovation Contract No. 1 - General Construction Work	Contract TAVREH	NYC DDC Medhat Azer	(212) 978-2835	3,473,822	August, 14
Central Park Police Precinct 86th Street Transverse Road, New York NY	20060007059	URS Corp. - NY / NYC DDC Douglas Kerrigan	(646) 963-6011	4,268,423	July, 14
Pier 40 HVAC Restoration	LC4548	LHO Program & Construction Mark Conti	(516) 938-5476	331,279	January, 14
Paerdegat Basin Water Quality Facility 1887 Ralph Avenue, Brooklyn, New York	WP-169 Contract # CSO-5H	Hazen & Sawyer, P.C. Pietro L. Palmari, P.E.	(718) 241-2053	21,828,306	September, 13
71st Precinct Station House Replacement of Existing Boiler & Associated Accessories	20121419085	NYPD - Bldg. Maintenance Stephen Sailer, APM III Cell:	(718) 476-8699 (347) 245-8365	383,323	August, 13
Hunter College City University of New York Chiller Replacement of A/C Upgrades	CTTY-CUCF-01-09-02-GC3	EPIC Management/CUNY Vincent Ramadani	(212) 601-2766	1,375,398	April, 13
Newtown Creek WPCP, NC-31H 329 Greenpoint Avenue, Brooklyn, NY	Project No. WP-283 Contract NC-31H	Malcolm Pirnie/NYC DEP Stan Damaris	(718) 383-7960	16,426,796	May, 13
Rikers Island Correctional Facility 800 Bed Addition at RMSC	20050016107	URS Corp. - NY/NYC DDC Frank Corona Cell	(212) 896-0140 (917) 578-5576	18,895,703	January, 13
Brooklyn VA Medical Center 800-Ton Chiller Replacement	GS-00P-07-BSD-0510 P.O. 3567	ConEd Solutions Mart Litvinko	(914) 286-7738	855,542	August, 12
Fort Totten Chiller Repairs		Paradigm Services, Inc. Shane Vazquez	(973) 989-5888	33,474	July, 12

**C.D.E. AIR CONDITIONING CO., INC.
PARTIAL LIST OF COMPLETED PROJECTS**

PROJECT NAME AND LOCATION	PROJECT NUMBER	OWNER/CONTACT	TELEPHONE NO.	FINAL CONTRACT PRICE	COMPLETION DATE
Mitchell Field Naval Exchange HVAC Work	Contract N400085-08-81-730011	Dave Rosenberg, Iron Eagle	(516) 826-6848	452,000	July, 12
7 West 51st Street, New York, NY Replacement 50-Ton Rooftop A/C Unit & Return Fan		Sedeco/PREF 7 West 51st LLC Matthew Johnson	(212) 317-2600	248,250	July, 12
FDNY EMS Station #27 68 East 133rd Street, Bronx, NY	F175EMS 2090026482	The IIRo Group/NYC DDC Joseph Fox Michael Mascaro	(917) 681-7242 (347) 386-3839	1,631,490	June, 12
Newtown Creek WPCP, NC-32H 329 Greenpoint Avenue, Brooklyn, NY 11222	Project # WP-283 Contract NC-32H	Hazen & Sawyer/NYC DEP Stan Dimaris	(718) 389-7960	12,041,893	March, 12
Brooklyn VA Hospital - HVAC Controls Replacement, Phase II	630-80-407	Anthony Weathers David Rosenberg, Iron Eagle	(718) 836-6600 (516) 826-6848	1,440,814	May, 11
Spring Creek AWP/CP - Upgrade HVAC Work 26 Ward WPC, Spring Creek Basin Brooklyn, New York	Project # WP-225 Contract # SC-1H	CDM/NYC DEP Keith Kelly	(516) 496-8400	6,470,663	April, 11
Lincoln Center - Package No. 5 Concourse Garage Renovation - HVAC Work West 65th Street & Broadway, New York NY	1266030	Edwin Ogando, Turner Const. Jed Gallagher, LCDP Dan Watson, LCDP	(212) 362-2775 (212) 875-5860 (212) 875-5828	6,465,870	February, 11
United Nations Development Corp. (UNDC) Elevator MER		UNDC Ken Coopersmith	(212) 888-1618	60,257	October, 10
Brooklyn VA Hospital - A/C No. 3 Brooklyn, New York	630A4-09-429	Doug Jones, DVA David Rosenberg, Iron Eagle	(718) 630-3007 (516) 286-6848	222,904	June, 10
EMD Brooklyn FDNY Dispatch 35 Empire Boulevard, Brooklyn, New York St. George Ferry Terminal, Staten Island	20050015993 11490057	URS Corp. - NY/NYC DDC Kenneth O'Conner Brickens Constr./NYC EDC Dennis O'Mahony	(718) 622-0151	1,094,410	June, 10
English Kills Aeration 1106 Grand Avenue, Brooklyn, New York	Project # WP-169 Cont. # EK-11H	NYC DEP Warren Gordon	(347)996-7790	469,970.	January, 10
Brooklyn VA - HVAC Controls Replacement 800 Poly Place, Brooklyn	630A4-06-407 Phase I	Patrick McDonald, DVA David Rosenberg, Iron Eagle	(718) 630-3586 (516) 826-6848	763,986	December, 09

MWBE PROGRAM

M/WBE UTILIZATION PLAN

M/WBE Program Requirements: The requirements for the M/WBE Program are set forth on the following pages of this Bid Booklet, in the section entitled “Notice to All Prospective Contractors”.

Schedule B: M/WBE Utilization Plan: Schedule B: M/WBE Utilization Plan for this Contract is set forth in this Bid Booklet on the pages following the section entitled “Notice to All Prospective Contractors”. The M/WBE Utilization Plan (Part I) indicates whether Participation Goals have been established for this Contract. If Participation Goals have been established for this Contract, the bidder must submit an M/WBE Utilization Plan (Part II) with its bid.

Waiver: The bidder may seek a full or partial pre-award waiver of the Participation Goals in accordance with the “Notice to All Prospective Contractors” (See Part A, Section 10). The bidder’s request for a waiver must be submitted at least seven (7) calendar days prior to the bid date. Waiver requests submitted after the deadline will not be considered. The form for requesting a waiver of the Participation Goals is set forth in the M/WBE Utilization Plan (Part III).

Rejection of the Bid: The bidder must complete Schedule B: M/WBE Utilization Plan (Part II) set forth in this Bid Booklet on the pages following the section entitled “Notice to All Prospective Contractors”. A Schedule B submitted by the bidder which does not include the Vendor Certification and Required Affirmations (See Section V of Part II) will be deemed to be non-responsive, unless a full waiver of the Participation Goals is granted (Schedule B, Part III). In the event that the City determines that the bidder has submitted a Schedule B where the Vendor Certification and Required Affirmations are completed but other aspects of the Schedule B are not complete, or contain a copy or computation error that is at odds with the Vendor Certification and Required Affirmations, the bidder will be notified by the Agency and will be given four (4) calendar days from receipt of notification to cure the specified deficiencies and return a completed Schedule B to the Agency. Failure to do so will result in a determination that the Bid is non-responsive.

Receipt of notification is defined as the date notice is emailed or faxed (if the bidder has provided an email address or fax number), or no later than five (5) days from the date of mailing or upon delivery, if delivered.

Impact on LBE Requirements: If Participation Goals have been established for the participation of M/WBES, the contractor is not required to comply with the Locally Based Enterprise Program (“LBE”). The LBE Program is set forth in Article 67 of the Contract.

THIS PAGE INTENTIONALLY LEFT BLANK

NOTICE TO ALL PROSPECTIVE CONTRACTORS

PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS
ENTERPRISES IN CITY PROCUREMENT

ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD
AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to

determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi-year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or**

below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an **M/WBE Utilization Plan** has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's **M/WBE Utilization Plan**, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its **M/WBE Utilization Plan** in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an **M/WBE Utilization Plan** has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its **M/WBE Utilization Plan**.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at zhangji@ddc.nyc.gov or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the Participation Goals to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the Participation Goals. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of M/WBE Utilization Plan. (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission. The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the Participation Goals. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;
- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its **M/WBE Utilization Plan** would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an **M/WBE Utilization Plan** and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of an **M/WBE** Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE** Utilization Plan.
2. Pursuant to DSBS rules, construction contracts that include a requirement for an **M/WBE** Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.
3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.
4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).
5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.
2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE** Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.
3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE** Utilization Plan, Agency may determine that one of the following actions should be taken:
 - (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
 - (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
 - (c) making a finding that the Contractor is in default of the Contract;
 - (d) terminating the Contract;
 - (e) declaring the Contractor to be in breach of Contract;
 - (f) withholding payment or reimbursement;
 - (g) determining not to renew the Contract;
 - (h) assessing actual and consequential damages;

- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

Tax ID #:

11-2217107

APT E-

PIN#:

8501

124

Contract # 1 - General Construction Work

SCHEDULE B - M/WBE Utilization Plan**Part I: M/WBE Participation Goals**

Part I to be completed by contracting agency

Contract Overview

APT E-Pin # 85017B0124 FMS Project ID#: LNxEA08BX
 Project Title/Agency Two (2) Bronx Branch Libraries - Replacement of HVAC & BMS
 PIN # 8502017LN0027C
 Bid/Proposal
 Response Date: THURSDAY, DECEMBER 28, 2017 - January 11, 2018
 Contracting Agency Department of Design and Construction
 Agency Address 30-30 Thomson Avenue City Long Island City State NY Zip Code 11101
 Contact Person Norma Negron Title MWBE Liaison & Compliance Analyst
 Telephone # (718) 391-1502 Email negronn@ddc.nyc.gov

Project Description (attach additional pages if necessary)

This Project consists of Upgrading the existing HVAC systems by replacing existing equipment, ductwork and controls to provide fully functional HVAC systems with web-based Building Management System (BMS) for four (2) Bronx Branch Libraries for Francis Martin and Clason's Point branches. In Francis Martin Branch Library: Upgrade the existing Fire Detection and Alarm system

M/WBE Participation Goals for Services

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services

Prime Contract Industry: Construction

Group	Percentage	
<u>Unspecified *</u>	<u>12</u>	<u>%</u>
OR		
<u>Black American</u>	<u>Unspecified</u>	<u>%</u>
<u>Hispanic American</u>	<u>Unspecified</u>	<u>%</u>
<u>Asian American</u>	<u>Unspecified</u>	<u>%</u>
<u>Women</u>	<u>Unspecified</u>	<u>%</u>
Total Participation Goals	12	%

Line 1

* Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.

Tax ID #: 11-2217107

APT E-
PIN#: J17B0124

SCHEDULE B - Part II: MWBE Participation Plan

Part II to be completed by the bidder/proposer:

Please note: For Non-MWBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 9 and 9a and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

Section I: Prime Contractor Contact Information

Tax ID #	<u>11-2217107</u>	FMS Vendor ID #	<u>0000477680</u>
Business Name	<u>C.D.E. Air Conditioning Co., Inc.</u>	Contact Person	<u>Joseph F. Azara, Jr.</u>
Address	<u>321 39th Street, Brooklyn, New York 11232</u>		
Telephone #	<u>718-788-1040</u>	Email	<u>josepha@cdeair.com</u>

Section II: M/WBE Utilization Goal Calculation: Check the applicable box and complete subsection.

PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS

<input checked="" type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and MWBE firms) adopting Agency M/WBE Participation Goals.	Total Bid/Proposal Value	Agency Total Participation Goals (Line 1, Page 6)	Calculated MWBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to MWBE subcontractors for services and/or credited to an MWBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for MWBE participation.	\$ 1,754,379.	X 12%	= \$ 210,525. Line 2

PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and MWBE firms) adopting Modified M/WBE Participation Goals.	Total Bid/Proposal Value	Adjusted Participation Goal (From Partial Waiver)	Calculated MWBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to MWBE subcontractors for services and/or credited to an MWBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for MWBE participation.	\$	X	= \$ Line 3

Section III: M/WBE Utilization Plan: How Proposer/Bidder Will Fulfill M/WBE Participation Goals. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation. Check applicable box. The Proposer or Bidder will fulfill the M/WBE Participation Goals:

- As an M/WBE Prime Contractor that will self-perform and/or subcontract to other M/WBE firms a portion of the contract the value of which is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non-M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals. Please check all that apply to Prime Contractor:
 MBE WBE
- As a Qualified Joint Venture with an M/WBE partner, in which the value of the M/WBE partner's participation and/or the value of any work subcontracted to other M/WBE firms is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals.
- As a non M/WBE Prime Contractor that will enter into subcontracts with M/WBE firms the value of which is at least the amount located on Lines 2 or 3 above, as applicable.

Section IV: General Contract Information

What is the expected percentage of the total contract dollar value that you expect to award in subcontracts for services, regardless of M/WBE status? % 60

Line	Enter brief description of the type(s) and dollar value of subcontracts for all services, including subcontracting and materials, to be awarded for each contract line item, whether the work is performed or participation by MBEs and/or WBEs, and the line item from which the work is scheduled to be performed and the location of the work (if applicable)	Estimated \$	Estimated %
1	General Work	290,000	21
2	Roofing	26,000	12
3	G.I.C. Work	(65,000)	(18)
4	Asbestos Abatement Work	5,000	5
5	Steel Work	40,000	20
6	Roofing Work	75,000	17
7	Interior Finish Work	110,000	10
8	Installation Work	25,000	9
9	Temperature Controls	70,000	20
10	Sheet Metal Work	170,000	18
11			
12			
13			
14			
15			
16			
17			

* - M/WBE's

✓ Scopes of Subcontract Work

Section V: Vendor Certification and Required Affirmations

- I hereby:
- acknowledge my understanding of the M/WBE participation requirements as set forth herein and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York (Section 6-129), and the rules promulgated thereunder;
 - affirm that the information supplied in support of this M/WBE Utilization Plan is true and correct;
 - agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
 - agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
 - agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

Signature Joseph F. Azara, Jr.
Print Name Joseph F. Azara, Jr.

Date January 11, 2018
Title President

SCHEDULE B – PART III – REQUEST FOR WAIVER OF M/WBE PARTICIPATION REQUIREMENT

Contract Overview

Tax ID # _____ FMS Vendor ID # _____

Business Name _____

Contact Name _____ Telephone # _____ Email _____

Type of Procurement Competitive Sealed Bids Other Bid/Response Due Date _____

APT E-PIN # (for this procurement): _____ Contracting Agency: _____

M/WBE Participation Goals as described in bid/solicitation documents

_____ % Agency M/WBE Participation Goal

Proposed M/WBE Participation Goal as anticipated by vendor seeking waiver

_____ % of the total contract value anticipated in good faith by the bidder/proposer to be subcontracted for services and/or credited to an M/WBE Prime Contractor or Qualified Joint Venture.

Basis for Waiver Request: Check appropriate box & explain in detail below (attach additional pages if needed)

- Vendor does not subcontract services, and has the capacity and good faith intention to perform all such work itself with its own employees.
- Vendor subcontracts some of this type of work but at a lower % than bid/solicitation describes, and has the capacity and good faith intention to do so on this contract. (Attach subcontracting plan outlining services that the vendor will self-perform and subcontract to other vendors or consultants.)
- Vendor has other legitimate business reasons for proposing the M/WBE Participation Goal above. Explain under separate cover.

References

List 3 most recent contracts performed for NYC agencies (if any). Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

(Complete ONLY if vendor has performed fewer than 3 New York City contracts.)

TYPE OF Contract	ENTITY	DATE COMPLETED
Manager at entity that hired vendor (Name/Phone No./Email)		
Total Contract Amount \$	Total Amount Subcontracted \$	
Type of Work Subcontracted		

TYPE OF Contract	AGENCY/ENTITY	DATE COMPLETED
Manager at agency/entity that hired vendor (Name/Phone No./Email)		
Total Contract Amount \$	Total Amount Subcontracted \$	
Item of Work Subcontracted and Value of subcontract	Item of Work Subcontracted and Value of subcontract	Item of Work Subcontracted and Value of subcontract

TYPE OF Contract	AGENCY/ENTITY	DATE COMPLETED
Manager at entity that hired vendor (Name/Phone No./Email)		
Total Contract Amount \$	Total Amount Subcontracted \$	
Item of Work Subcontracted and Value of subcontract	Item of Work Subcontracted and Value of subcontract	Item of Work Subcontracted and Value of subcontract

VENDOR CERTIFICATION: I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

Signature: _____ Date: _____
 Print Name: _____ Title: _____

Shaded area below is for agency completion only

AGENCY CHIEF CONTRACTING OFFICER APPROVAL
 Signature: _____ Date: _____

CITY CHIEF PROCUREMENT OFFICER APPROVAL
 Signature: _____ Date: _____

Waiver Determination

Full Waiver Approved:
 Waiver Denied:
 Partial Waiver Approved:
 Revised Participation Goal: _____ %

**BID FORM
THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

**BID FOR FURNISHING ALL LABOR AND
MATERIAL NECESSARY AND REQUIRED FOR:**

PROJECT ID: LNXEA08BX

**Two Bronx Branch Library, Replacement of HVAC & BMS, Francis
Martin & Clason's Point
2150 University Avenue and 1215 Morrison Avenue
Bronx, 10453 and Bronx, 10472**

Name of Bidder: C.D.E. Air Conditioning Co., Inc.

Date of Bid Opening: January 11, 2018

Bidder is: (Check one, whichever applies) Individual () Partnership () Corporation (X)

Place of Business of Bidder: 321 39th Street, Brooklyn, New York 11232

Bidder's Telephone Number: 718-788-1040 Bidder's Fax Number: 718-788-2046

Bidder's Email Address: josepha@cdeair.com

Residence of Bidder (If Individual): _____

If Bidder is a Partnership, fill in the following blanks:

Names of Partners

Residence of Partners

_____	_____
_____	_____
_____	_____

If Bidder is a Corporation, fill in the following blanks:

Organized under the laws of the State of New York

Name and Home Address of President: Joseph F. Azara, Jr.
215 Howard Avenue, Staten Island, New York 10301

Name and Home Address of Secretary: Brian J. Azara
251 7th Street, Apt. # 8D, Brooklyn, New York 11215

Name and Home Address of Treasurer: Christine R. Azara
215 Howard Avenue, Staten Island, New York 10301

BID FORM

The above-named Bidder affirms and declares:

1. The said bidder is of lawful age and the only one interested in this bid; and no person, firm or corporation other than hereinbefore named has any interest in this bid, or in the Contract proposed to be taken.
2. By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief: (1) the prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or with any competitor; (2) unless otherwise required by law, the prices quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor; and (3) no attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.
3. No councilman or other officer or employee or person whose salary is payable in whole or in part from the City Treasury is directly or indirectly interested in this bid, or in the supplies, materials, equipment, work or labor to which it relates, or in any of the profits thereof.
4. The bidder is not in arrears to the City of New York upon debt or contract or taxes, and is not a defaulter, as surety or otherwise, upon any obligation of the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York or State of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except as set forth on the Affirmation included as page 17 of this Bid Booklet.

The bidder hereby affirms that it has paid all applicable City income, excise and other taxes for all years it has conducted business activities in New York City.

5. The bidder, as an individual, or as a member, partner, director or officer of the bidder, if the same be a firm, partnership or corporation, executes this document expressly warranting and representing that should this bid be accepted by the City and the Contract awarded to him, he and his subcontractors engaged in the performance:
(1) will comply with the provisions of Section 6-108 of the Administrative Code of the City of New York and the non-discrimination provisions of Section 220a of the New York State Labor Law, as more expressly and in detail set forth in the Agreement; (2) will comply with Section 6-109 of the Administrative Code of the City of New York in relation to minimum wages and other stipulations as more expressly and in detail set forth in the Agreement; (3) have complied with the provisions of the aforesaid laws since their respective effective dates. and (4) will post notices to be furnished by the City, setting forth the requirements of the aforesaid laws in prominent and conspicuous places in each and every plant, factory, building and structure where employees engaged in the performance of the Contract can readily view it, and will continue to keep such notices posted until the supplies, materials and equipment, or work labor and services required to be furnished or rendered by the Contractor have been finally accepted by the City. In the event of any breach or violation of the foregoing, the Contractor may be subject to damages, liquidated or otherwise, cancellation of the Contract and suspension as a bidder for a period of three years. (The words, "the bidder", "he", "his", and "him" where used shall mean the individual bidder, firm, partnership or corporation executing this bid).

6. Compliance Report

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, (1) represents that his attention has been specifically drawn to Executive Order No. 50, dated April 25, 1980, on Equal Employment Compliance of the contract, and (2) warrants that he will comply with the provisions of Executive Order No. 50. The Employment Report must be submitted as part of the bid.

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, executes this document expressly warranting that he will comply with: (1) the provision of the contract on providing records, Chapter 8.

7. By submission of this bid, the bidder certifies that it now has and will continue to have the financial capability to fully perform the work required for this contract. Any award of this contract will be made in reliance upon such certification. Upon request therefor, the bidder will submit written verification of such financial capability in a form that is acceptable to the department.

8. In accordance with Section 165 of the State Finance Law, the bidder agrees that tropical hardwoods, as defined in Section 165 of the State Finance Law, shall not be utilized in the performance of this Contract, except as the same are permitted by the foregoing provision of law.

9. The bidder has visited and examined the site of the work and has carefully examined the Contract in the form approved by the Corporation Counsel, and will execute the Contract and perform all its items, covenants and conditions, and will provide, furnish and deliver all the work, materials, supplies, tools and appliances for all labor and materials necessary or required for the hereinafter named work, all in strict conformity with the Contract, for the prices set forth in the Bid Schedule.

10. **M/WBE UTILIZATION PLAN:** By signing its bid, the bidder agrees to the Vendor Certification and Required Affirmations set forth below, unless a full waiver of the Participation Goals is granted. The Vendor Certification and Required Affirmations will be deemed to satisfy the requirement to complete Section V of Part II of Schedule B: M/WBE Utilization Plan.

Section V: Vendor Certification and Required Affirmations:

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth in this Contract and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of the M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or If a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

BID FORM: SITE A (Francis Martin Branch)

PROJECT ID: LNXEA08BX

TOTAL BID PRICE: In the space provided below, the Bidder shall indicate the total bid price in figures.

- A. LUMP SUM PRICE - Total price for all labor and material for all required work, excluding items (B) and (C) set forth below. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

Total Price for Material Sold and Delivered		Total Price For Labor		Total Price for Item A= \$	<u>1,166,985.</u>
\$ <u>500,000.</u>	+	\$ <u>666,985.</u>			


B. ALLOWANCE for Incidental Asbestos Abatement (Section 028013 of the Specifications) \$30,000.00


C. AMOUNT for Proprietary Items (pages 2a) \$53,500.00

TOTAL BID PRICE (Add A + B + C) \$ 1,250,485.
(a/k/a BID PROPOSAL)

BIDDER'S SIGNATURE AND AFFIDAVIT

Bidder: C.D.E. Air Conditioning Co., Inc.

By: 
(Signature of Partner or corporate officer)
Joseph F. Azara, Jr. - President

Attest: 
(Corporate Seal) Brian J. Azara Secretary of Corporate Bidder

Affidavit on the following page should be subscribed and sworn to before a Notary Public

BID FORM: SITE B (Clason's Point Branch)

PROJECT ID: LNXEA08BX

TOTAL BID PRICE: In the space provided below, the Bidder shall indicate the total bid price in figures.

A. LUMP SUM PRICE - Total price for all labor and material for all required work, excluding items (B) and (C) set forth below. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

Total Price for
Material Sold and
Delivered

\$ 170,000.

+

Total Price For
Labor

\$ 265,394.

Total Price for Item A= \$ 435,394.

B. ALLOWANCE for Incidental Asbestos Abatement
(Section 028013 of the Specifications)

\$30,000.00

C. AMOUNT for Proprietary Items (pages 2a)

\$38,500.00

TOTAL BID PRICE (Add A + B + C)
(a/k/a BID PROPOSAL)

\$ 503,894.

J.C.
1/11/18

BIDDER'S SIGNATURE AND AFFIDAVIT

Bidder: C.D.E. Air Conditioning Co., Inc.

By:

Joseph F. Azara, Jr.

(Signature of Partner or corporate officer)

Joseph F. Azara, Jr. - President

Attest:

Brian J. Azara
Brian J. Azara

Secretary of Corporate Bidder

(Corporate Seal)

Affidavit on the following page should be subscribed and sworn to before a Notary Public

BID FORM: 2 Bronx Libraries Replacement of HVAC & BMS

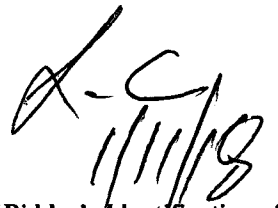
PROJECT ID: LNXEA08BX

TOTAL BID PRICE: In the space provided below, the Bidder shall indicate the total bid price in figures.

E.1 SUBTOTAL BID PRICE from SITE A (Francis Martin Branch) (Page 13-1) \$ 1,250,485.

E.2 SUBTOTAL BID PRICE from SITE B (Clason's Point Branch) (Page 13-2) \$ 503,894.

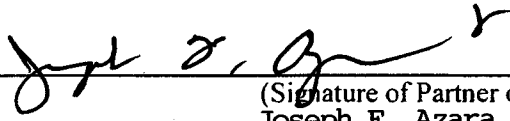
TOTAL BID PRICE (Add E.1 + E.2) \$ 1,754,379.
(a/k/a BID PROPOSAL)



BIDDER'S SIGNATURE AND AFFIDAVIT

* **SUBCONTRACTOR IDENTIFICATION:** You MUST complete and submit the form entitled "Bidder's Identification of Subcontractors" (page 17) at the time you submit your bid. You must submit this form in a separate, sealed envelope (BID ENVELOPE #2). In the event an award of contract is not made to the Bidder, the Bidder hereby authorizes the Agency to shred the form entitled "Bidder's Identification of Subcontractors". X Yes No

Bidder: C.D.E. Air Conditioning Co., Inc.

By: 
(Signature of Partner or corporate officer)
Joseph F. Azara, Jr. - President

Attest:  Secretary of Corporate Bidder
(Corporate Seal) Brian J. Azara

Affidavit on the following page should be subscribed and sworn to before a Notary Public

BID FORM (TO BE NOTARIZED)

AFFIDAVIT WHERE BIDDERS IS AN INDIVIDUAL

STATE OF NEW YORK, COUNTY OF _____ ss:
_____ being duly sworn says:
I am the person described in and who executed the foregoing bid, and the several matters therein stated are in all respects true

(Signature of the person who signed the Bid)

Subscribed and sworn to before me this
_____ day of _____,

Notary Public

AFFIDAVIT WHERE BIDDERS IS A PARTNERSHIP

STATE OF NEW YORK, COUNTY OF _____ ss:
_____ being duly sworn says:
I am a member of _____ the firm described in and which executed the foregoing bid
subscribed the name of the firm thereto on behalf of the firm, and the several matters therein stated are in all respects true.

(Signature of Partner who signed the Bid)

Subscribed and sworn to before me this
_____ day of _____,

Notary Public

AFFIDAVIT WHERE BIDDERS IS A CORPORATION

STATE OF NEW YORK, COUNTY OF Kings ss:
Joseph F. Azara, Jr. being duly sworn says:
I am the President of the above named corporation whose name is subscribed to and which executed
the foregoing bid. I reside at 215 Howard Avenue, Staten Island, New York 10301
I have knowledge of the several matters therein stated, and they are in all respects true.

Joseph F. Azara, Jr.
(Signature of Corporate Officer who signed the Bid)

Subscribed and sworn to before me this
11th day of Jan., 2018

Robert J. Ayoub
Notary Public

ROBERT J. AYOUB
NOTARY PUBLIC STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

AFFIRMATION

The undersigned bidder affirms and declares that said bidder is not in arrears to the City of New York upon debt contract or taxes and is not a defaulter, as surety or otherwise, upon obligation to the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except None.

(If none, the bidder shall insert the word "None" in the space provided above.)

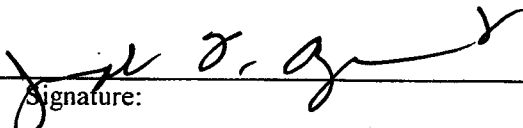
Full Name of Bidder: C.D.E. Air Conditioning Co., Inc.
Address: 321 39th Street
City: Brooklyn State: New York Zip Code: 11232

CHECK ONE BOX AND INCLUDE APPROPRIATE NUMBER:

- A - Individual or Sole Proprietorship *
SOCIAL SECURITY NUMBER

- B - Partnership, Joint Venture or other unincorporated organization
EMPLOYER IDENTIFICATION NUMBER

- C - Corporation
EMPLOYER IDENTIFICATION NUMBER
11-2217107

By: 
Signature:

Title: President

If a corporation, place seal here

This affirmation must be signed by an officer or duly authorized representative.

* Under the Federal Privacy Act the furnishing of Social Security Numbers by bidders on City contracts is voluntary. Failure to provide a Social Security Number will not result in a bidder's disqualification. Social Security Numbers will be used to identify bidders, proposers or vendors to ensure their compliance with laws, to assist the City in enforcement of laws, as well as to provide the City a means of identifying of businesses which seek City contracts.

BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

NOTICE TO BIDDERS

SUBMISSION: The Bidder must, at the time of the bid, submit the completed form on the next page ("BIDDER'S IDENTIFICATION OF SUBCONTRACTORS"). This form must be submitted in a separate, sealed envelope (BID ENVELOPE #2). Failure to do so will result in the disqualification of the bid as non-responsive.

Please be advised that pursuant to GML § 101(5) the Bidder is required to submit with its bid the names of subcontractors it intends to use to perform the following work on this contract, as well as the agreed-upon amount to be paid to each:

- plumbing and gas fitting;
- steam heating, hot water heating, ventilating and air conditioning apparatus; and
- electric wiring and standard illuminating fixtures.

NOTE: This project may not involve all of the above listed subcontractors. Please see the form on the next page which indicates the subcontractors required for this Project.

All listed subcontractors must be used to perform the work identified on this form for the amount listed. The listed subcontractors are not alternatives to each other. The list of subcontractors is to be submitted in a separate sealed envelope by completing the form 'Bidders Identification of Subcontractors' for any subcontractors intended to be used in any of the three trades listed above. If bidder intends to use its own forces for any of the above listed work, bidder should complete this form using its own name.

Failure to submit the completed form on the next page ("Bidder's Identification of Subcontractors") that includes the names of subcontractors and the agreed upon amounts to be paid to such subcontractors will render the bid non-responsive.

PLEASE NOTE: for any contract that is subject to M/WBE Participation Goals under Local Law 129, if the bidder's intention to use its own forces to do any of the above-referenced work would result in Bidder's failure to attain the Target Subcontracting Percentage identified in Schedule B (Subcontractor Utilization Plan), the bid will be non-responsive unless the bidder requests and obtains a Waiver of Target Subcontracting Percentage (Schedule B, Part III) in advance of bid submission. Failure to submit the completed 'BIDDERS IDENTIFICATION OF SUBCONTRACTORS' form that includes the names of subcontractors and the agreed upon amounts to be paid to such subcontractors will render the bid non-responsive.

After the low bid is announced, the sealed list submitted by the low bidder will be opened and the names of the subcontractors will be announced. The sealed lists of subcontractors submitted by all other bidders shall be maintained by the Agency unopened unless such bidder shall become the low bidder (e.g., the initial low bidder is found non-responsive). All unopened lists of subcontractors shall be returned to the bidders unopened after contract award, unless the bidder has given the agency permission to shred the form.

After bid submission, any change of subcontractor or agreed-upon amount to be paid to each shall require approval of the Agency upon a showing of a legitimate construction need which shall include, but not be limited to, a change in project specifications, a change in project material costs, a change to subcontractor status as determined pursuant to §222 (2)(e) of the Labor Law, or if the subcontractor has become otherwise unwilling, unable or unavailable to perform the subcontract.

BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

Project ID: LNXEA08BX

SUBMISSION: In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

1. **HVAC CONTRACTOR:** Description of HVAC Work:

C.D.E. Air Conditioning Co., Inc. All
 (Print Name)


Agreed amount to be paid Subcontractor: \$ 1,464,379.

2. **ELECTRICAL CONTRACTOR:** Description of Electrical Work:

Milad Contracting Corp. All
 (Print Name)

Agreed amount to be paid Subcontractor: \$ 290,000.

BIDDER'S SIGNATURE: The Bidder must sign and complete this form in the spaces provided below:

 C.D.E. Air Conditioning Co., Inc.
 (Bidder's Signature) Mitchell I. Merdinger, Vice-Pres.
 (Print Name)

321 39th Street, Brooklyn, New York, 11232
 (Address)

President 718-788-1040 718-788-2046 Jan. 11, 2018
 (Title) (Phone #) (Fax#) (Date)

**BID BOND 1
FORM OF BID BOND**

KNOW ALL MEN BY THESE PRESENTS. That we, _____

C.D.E. Air Conditioning Co., Inc.
321 39th Street, Brooklyn, NY 11232

hereinafter referred to as the "Principal", and _____

Liberty Mutual Insurance Company
175 Berkeley Street, Boston, MA 02116

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of Ten Percent of the Total

Amount Bid-----

(\$ 10%), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for Contract LNXEA08BX, Contract No. 1 - GC Work

Two (2) Bronx Branch Libraries, Replacement of HVAC & BMS, Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453 and Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.

BID BOND 2

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to him the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the 28th day of December, 2017.

(Seal)

C.D.E. Air Conditioning Co., Inc. (L.S.)
Principal

By:

Joseph F. Azara, Jr. President

(Seal)

Liberty Mutual Insurance Company
Surety

By:

Theresa J Foley, Attorney-In-Fact

BID BOND 3

ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Kings ss:
On this 11th day of January, 2018, before me personally came Joseph F. Azara, Jr. to me known, who, being by me duly sworn, did depose and say that he resides at 215 Howard Avenue, Staten Island, New York 10301 that he is the President of C.D.E. Air Conditioning Co., Inc. the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

ROBERT J. AYOUB
NOTARY PUBLIC STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

Robert J. Ayoub
Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:
On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument, and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:
On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be the person described in and who executed the foregoing instrument and acknowledged that he executed the same.

Notary Public

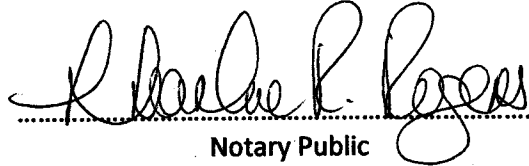
AFFIX ACKNOWLEDGEMENTS AND JUSTIFICATION OF SURETIES

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF NEW YORK

COUNTY OF NASSAU

On this 28th day of December, 2017, before me personally came **Theresa J Foley** to me known, who, being by me duly sworn, did depose and say; that he is the Attorney-in-Fact of **Liberty Mutual Insurance Company**, the corporation described in which executed the above instrument; that he knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by the Board of Directors of said corporation; and that he signed his name thereto by the authority of the Power of Attorney of said Company, of which a Certified Copy is hereto attached, and that he signed said Instrument as an Attorney-in-Fact of said company by like authority.


.....
Notary Public

SHARLINE R. ROGERS
NOTARY PUBLIC, State of New York
No. 01RO6204400
Qualified in Queens County
Commission Expires April 20, 2021

THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Certificate No. 7702046

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company West American Insurance Company

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Frankie Grella; Kevin T. Walsh; Michael Marino; Theresa J. Foley

all of the city of Jericho, state of NY, each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 29th day of March, 2017.



The Ohio Casualty Insurance Company
Liberty Mutual Insurance Company
West American Insurance Company

By: David M. Carey
David M. Carey, Assistant Secretary

STATE OF PENNSYLVANIA ss
COUNTY OF MONTGOMERY

On this 29th day of March, 2017, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.



COMMONWEALTH OF PENNSYLVANIA
Notarial Seal
Teresa Pastella, Notary Public
Upper Merion Twp., Montgomery County
My Commission Expires March 28, 2021
Member, Pennsylvania Association of Notaries

By: Teresa Pastella
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV - OFFICERS - Section 12. Power of Attorney. Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII - Execution of Contracts - SECTION 5. Surety Bonds and Undertakings. Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation - The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this DEC 28 2017 day of _____, 2017.



By: Renee C. Llewellyn
Renee C. Llewellyn, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or individual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.



LIBERTY MUTUAL INSURANCE COMPANY
 FINANCIAL STATEMENT — DECEMBER 31, 2016

Assets		Liabilities	
Cash and Bank Deposits	\$1,092,914,837	Unearned Premiums	\$6,929,723,299
*Bonds — U.S Government	1,406,763,970	Reserve for Claims and Claims Expense.....	17,233,877,300
*Other Bonds.....	11,379,916,523	Funds Held Under Reinsurance Treaties.....	208,362,823
*Stocks	10,349,761,988	Reserve for Dividends to Policyholders.....	944,909
Real Estate	290,265,760	Additional Statutory Reserve.....	39,649,905
Agents' Balances or Uncollected Premiums.....	4,709,977,463	Reserve for Commissions, Taxes and	
Accrued Interest and Rents.....	112,757,395	Other Liabilities	3,061,117,958
Other Admitted Assets.....	<u>14,659,523,751</u>	Total	<u>\$27,473,676,194</u>
Total Admitted Assets.....	<u>\$44,001,881,687</u>	Special Surplus Funds.....	\$95,257,334
		Capital Stock.....	10,000,000
		Paid in Surplus.....	9,229,250,104
		Unassigned Surplus.....	7,193,698,055
		Surplus to Policyholders	16,528,205,493
		Total Liabilities and Surplus	<u>\$44,001,881,687</u>



* Bonds are stated at amortized or investment value; Stocks at Association Market Values.
 The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2016, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 23rd day of March, 2017.

T. Mikolajewski

Assistant Secretary

BID BREAKDOWN

Submission: Bidders are advised that the requirement to submit a Bid Breakdown applies to each contract for which an "X" is indicated before the word "Yes". If required, the bidder must submit, with its bid, a completed Bid Breakdown. Failure to provide a completed Bid Breakdown may result in rejection of the bid as non-responsive.

..... X YES NO

Limitations on Use of Bid Breakdown:

Bidders are advised that the Bid Breakdown shall be used for bid analysis purposes only and shall not be binding for any other purposes under the Contract, including, without limitation, for payment purposes or in connection with a contractor claim for extra work. If the form for the Bid Breakdown does not include an item of work required by the Contract Documents, such omission shall have no effect whatsoever, nor shall it be used by the contractor in connection with a claim for extra work (i.e., work for which the contractor is entitled to a change order).

Instructions for Preparing Bid Breakdown:

- (A) The Bid Breakdown is set forth on the following pages of this Bid Booklet and is in accordance with the Construction Specification Institute (CSI) format. For all items of work listed in the Bid Breakdown, the bidder must indicate the price for labor and the price for material, as well as the estimated quantities required.
- (B) In preparing its Bid Breakdown, the bidder shall submit prices that include all costs for overhead and profit. Overhead shall include, without limitation, all costs in connection with the following: administration, management, superintendence, small tools, insurance, bonds, and provision of services or items required by the General Conditions [except for Security/Fire Guard Services and Temporary Heat]. If the Project requires Security/Fire Guard Services and/or Temporary Heat, such service(s) will be included as separate line items in the Bid Breakdown.
- (C) If an item is set forth in the Bid Breakdown, but is not included in the Contract Documents (Drawings, Specifications, General Conditions, and/or Addenda), the bidder is advised to leave the item blank and exclude the cost of the item from its grand total. In an attachment to its Bid Breakdown, the bidder shall provide a list of all items left blank.
- (D) If an item is not set forth in the Bid Breakdown, but is included in the Contract Documents (Drawings, Specifications, General Conditions, and/or Addenda), the bidder is advised to add the item to its Bid Breakdown and include the cost of the item in its grand total. In an attachment to its Bid Breakdown, the bidder shall provide a list of all items added.

THIS PAGE INTENTIONALLY LEFT BLANK



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - TWO (2) BRONX BRANCH LIBRARIES REPLACEMENT OF HVAC AND BMS

Location: Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

Bidder: C. D. E. Air Conditioning Co., Inc.

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	CONTRACT 1 - General Construction							
	Division 02 - EXISTING CONDITIONS							
02 41 19	SELECTIVE REMOVALS AND DEMOLITION							
	20 CY DUMPSTER (NON-ASBESTOS)-LOADING/UNL		LS					\$38,000
	REMOVE EXISTING DUCTWORK		LS					INCL.
	REMOVE EXISTING HOT WATER PUMP		EA					INCL.
	REMOVE EXISTING AIR HANDLER UNIT		EA					INCL.
	REMOVE EXISTING PIPING		LS					INCL.
	CRANE AND CREW (HVAC)		LS					INCL.
	GENERAL ELECTRICAL WORK DEMOLITION		LS					INCL.
	HANDLING ALL MATERIALS (SCAFF, ACT, GWB)		LS					INCL.
	REPLACEMENT ACOUSTICAL CEILING TILES (IN KIND)		LS					INCL.
	TOTAL DIVISION 02 - EXISTING CONDITIONS							\$38,000
	Division 03 CONCRETE							
03 30 00	CAST IN PLACE CONCRETE		CY					\$30,000
	TOTAL DIVISION 03 - CONCRETE							\$30,000
	Division 07-THERMAL AND MOISTURE PROTECTION							
07 84 00	FIRESTOPPING/SMOKE SEALS							
	PIPES & CONDUITS PENETRATIONS FIRESTOPPING		LS					\$5,000
	TOTAL DIVISION 07 THERMAL AND MOISTURE PROTECTION							\$5,000
	Division 09 - FINISHES							
09 91 23	INTERIOR PAINTING		SF					in Concrete
	TOTAL 09 - FINISHES							\$0
	SUBTOTAL GENERAL CONSTRUCTION							\$73,000



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - TWO (2) BRONX BRANCH LIBRARIES REPLACEMENT OF HVAC AND BMS

Location: Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

Bidder: C. D. E. Air Conditioning Co., Inc.

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	Division 23-HEATING, VENTILATING AND AIR CONDITIONING							
23 05 01	REQUIREMENTS							
	RIGGING AND MISCELLANEOUS		LS					\$20,000
	TOTAL 23 05 01 BASIC HVAC							\$20,000
23 05 03	HVAC PIPING							
	1 1/8" COOPER PIPING		FT					\$83,000
	1/2" COOPER PIPING		FT					INCL.
	TOTAL 23 05 00 HVAC PIPING							\$83,000
23 05 23	HVAC VALVES							
	1" SHUT OFF VALVES		EA					INCL.
	TOTAL 23 05 23 VALVES							\$0
23 05 49	VIBRATION ISOLATORS		LS					\$3,000
	TOTAL 23 05 49 VIBRATION ISOLATORS							\$3,000
23 05 53	HVAC IDENTIFICATION		LS					\$2,000
	TOTAL 23 05 53 HVAC IDENTIFICATION							\$2,000
	TESTING/CLEANING/BALANCING OF SYSTEMS							
23 05 93	CLEANING AND TESTING		LS					\$10,000
23 05 93	HVAC BENCHMARK AIR READING		LS					\$1,000
23 05 94	BALANCING OF SYSTEM		LS					\$2,000
	TOTAL 23 05 90 TESTING/CLEANING/BALANCING OF SYSTEMS							\$13,000
	INSULATION							
23 07 01	PIPING INSULATION		LF					\$17,000
23 07 03	DUCTWORK INSULATION		SF					INCL.
	TOTAL 23 07 00 INSULATION							\$17,000



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - TWO (2) BRONX BRANCH LIBRARIES REPLACEMENT OF HVAC AND BMS

Location: Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

Bidder: C. D. E. Air Conditioning Co., Inc.

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	DDC CONTROL FOR HVAC							
23 09 23	TEMPERATURE SENSORS RECONNECTION		EA					\$40,000
23 09 23	INSTALLATION OF WEB-BASED BMS		EA					INCL.
23 09 23	HVAC CONTROLS LOW VOLTAGE		LS					INCL.
23 09 93	SEQUENCE OF OPERATIONS							
	CONTROL DATA / PROGRAMMING		LS					INCL.
	TOTAL 23 09 00 DDC CONTROL							\$40,000
23 20 03	THERMOMETERS AND GAUGES		LS					\$400
	TOTAL 23 09 03 THERMOMETERS AND GAUGE							\$400
23 21 16	HYDRONIC SPECIALTIES							
	AIR VENTS		LS					in Piping
	STRAINERS		EA					in Piping
	TOTAL 23 21 16 HYDRONIC SPECIALTIES							\$0
23 21 23	PUMPS	2	EA					\$2,000
	TOTAL 23 21 23 PUMPS							\$2,000
	METAL DUCTWORK AND ACCESSORIES							
23 31 13	METAL DUCTS		LB					\$58,000
23 33 00	AIR DUCT ACCESSORIES		LS					in Duct
23 33 01	ACCESS DOORS		EA					in Duct
	TOTAL 23 30 00 DUCTWORK AND ACCESSORIES							\$58,000
23 33 13	DAMPERS							
	MOTORIZED VOLUME DAMPERS		EA					in Duct
	VOLUME DAMPERS		EA					in Duct
	LOUVERED AIR INTAKE PANTHOUSE WITH DAMPER	1	EA					\$3,000
	TOTAL 23 33 13 DAMPERS							\$3,000



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - TWO (2) BRONX BRANCH LIBRARIES REPLACEMENT OF HVAC AND BMS

Location: Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

Bidder: C. D. E. Air Conditioning Co., Inc.

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
23 63 13	AIR COOLED CONDENSING UNITS	1	EA					\$75,000
	TOTAL 23 63 13 AIR COOLED CONDENSING UNITS							\$75,000
23 73 13	AIR HANDLING UNITS	1	EA					in Cond. Unit
	TOTAL 23 73 13 AIR HANDLING UNITS							\$0
	TOTAL DIVISION 23 - HVAC							\$316,400
	Division 26-ELECTRICAL							
26 05 01	GENERAL PROVISIONS FOR ELECTRICAL WORK							
	CORE DRILLING		LS					\$44,000
	TESTING		LS					
	SCAFFOLD RENT-SETUP		LS					
	OTHER		LS					
	TOTAL 26 05 01 GENERAL PROVISIONS							\$44,000
26 05 22	WIRING SYSTEMS		LS					
	WEATHER-PROOF GFCI RECEPTACLE		EA					INCL.
26 05 29	HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS							INCL.
	(Included in 26 05 33)							
26 05 32	ELECTRICAL IDENTIFICATION		LS					INCL.
	TOTAL 26 05 32 ELECTRICAL IDENTIFICATION							\$0
	TOTAL 26 05 22 WIRING SYSTEMS							
26 05 33	RACEWAY AND BOXES FOR ELECTRICAL SYSTEM							
	RACEWAY AND BOXES		LS					INCL.
	TOTAL 26 05 33 RACEWAY AND BOXES							\$0



Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - TWO (2) BRONX BRANCH LIBRARIES REPLACEMENT OF HVAC AND BMS

Location: Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472

Bidder: C. D. E. Air Conditioning Co., Inc.

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
26 27 26	WIRING DEVICES							
	WEATHER-PROOF GFCI RECEPTACLE		EA					INCL.
	TOTAL 26 27 26 WIRING DEVICES							\$0
26 24 19	MOTORS, STARTERS AND CONTROL EQUIPMENT							
	VFD (Provided with 237313-Built-In)							
	COMBINATION MOTOR STARTERS	2	EA					\$1,994
	TOTAL 26 24 19 MOTORS, STARTERS AND CONTROL EQUIPMENT							\$1,994
26 28 12	SAFETY SWITCHES							
	DISCONNECT SWITCH NEMA 3R		EA					in Electrical
	CIRCUIT BREAKERS 3P, 20A		EA					INCL.
	TOTAL 26 28 12 SAFETY SWITCHES							\$0
	TOTAL DIVISION 26 -ELECTRICAL							\$45,994
	CLASON'S POINT SUB-TOTAL							\$435,394.00



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNxEA08BX
 Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	Division 02-EXISTING CONDITIONS							
02 41 19	SELECTIVE REMOVALS AND DEMOLITION							
	REMOVE EXISTING ROOF TOP UNITS		EA					\$35,000.00
	REMOVE EXISTING AIR HANDLER UNIT		EA					INCL.
	REMOVE EXISTING CONDENSING UNIT		EA					INCL.
	REMOVE RETURN FAN AND DUCT		LS					INCL.
	REMOVE EXISTING CONTROLS		LS					INCL.
	CRANE AND CREW (HVAC)		LS					INCL.
	DUMPSTER (NON-ASBESTOS)-LOADING/UNL		CY					INCL.
	HANDLING ALL MATERIALS (SCAFF, ACT, GWB)		LS					INCL.
02 81 13	ASBESTOS ABATMENT		LS					\$7,000.00
	TOTAL DIVISION 02 - EXISTING CONDITIONS							\$42,000.00
	Division 03 CONCRETE							
03 30 00	CAST IN PLACE CONCRETE		CY					\$119,000.00
	TOTAL DIVISION 03 - CONCRETE							\$119,000.00
	Division 05-METALS							
05 12 00	STRUCTURAL STEEL		LB					\$64,000.00
	METAL FABRICATIONS (ROOFTOP SUPPORT)							\$64,000.00
	TOTAL DIVISION 05 - METALS							
	Division 07-THERMAL AND MOISTURE PROTECTION							
07 01 50	MAINTENANCE OF MEMBRANE ROOFING		LS					\$90,000.00
	PARTIAL ROOFING REPAIR		LS					in Roofing
07 62 00	SHEET METAL FLASHING AND TRIM		LS					
07 84 00	FIRESTOPPING/SMOKE SEALS		LS					\$8,000.00
	PIPES & CONDUITS PENETRATIONS FIRESTOPPING		LF					
07 92 00	JOINT SEALER							
	TOTAL DIVISION 07 - THERMAL AND MOISTURE PROTECTION							\$98,000.00
	Division 08 OPENINGS							

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNXEA08BX

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
08 91 00	STATIONARY METAL WALL LOUVERS		EA					\$10,000.00
	TOTAL DIVISION 08 - OPENINGS							\$10,000.00
	Division 09-FINISHES							
	CLEAN RUST, PRIME, PAINT EXISTING STEEL		SF					in Conc.
09 21 16	GYPSUM BOARD ASSEMBLIES		LS					in Conc.
09 91 23	INTERIOR PAINTING							
	PAINTING AND PATCHING		LS					in Conc.
	TOTAL DIVISION 09 - FINISHES							\$0.00
	Division 13-SPECIAL CONSTRUCTION							
13 48 13	ACOUSTICAL PANEL SYSTEMS							
	ACOUSTICAL PANELS, 10' H. Galv. 3Lb.SF Fill		SF					\$28,685.00
	ACOUSTICAL PANELS SUPPORTS, Equipment Rail and Brackets		EA					in Steelwork
	MISC. STEEL		LF					in Steelwork
	TOTAL DIVISION 13 - SPECIAL CONSTRUCTION							\$28,685.00
	SUBTOTAL GENERAL CONSTRUCTION							\$361,685.00
	Division 23-HEATING, VENTILATING AND AIR CONDITIONING REQUIREMENTS							
23 05 01	RIGGING AND MISCELLANEOUS		LS					\$50,000.00
	TOTAL 23 05 01 BASIC HVAC							\$50,000.00
23 05 03	HVAC PIPING							
	1" PIPING		FT					\$56,000.00
	1 1/8 PIPING		FT					INCL.
	1/2 PIPING		FT					INCL.
	TOTAL 23 05 00 HVAC PIPING							\$56,000.00
23 05 23	HVAC VALVES							
	1" BALL VALVES		EA					



Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNXEA08BX

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
23 20 03	THERMOMETERS AND GAUGES TOTAL 23 09 03 THERMOMETERS AND GAUGE		LS					\$400.00 \$400.00
23 21 16	HYDRONIC SPECIALTIES AIR VENTS STRAINERS TOTAL 23 21 16 HYDRONIC SPECIALTIES		LS EA					in Pipe in Pipe \$0.00
23 31 13	METAL DUCTWORK AND ACCESSORIES							
23 33 00	METAL DUCTS		LB					\$170,000.00
23 33 01	AIR DUCT ACCESSORIES		LS					in Duct
	ACCESS DOORS		EA					in Duct
	TOTAL 23 30 00 DUCTWORK AND ACCESSORIES							\$170,000.00
23 33 13	DAMPERS							
	MOTORIZED DAMPERS		EA					in Duct
	FIRE AND SMOKE DAMPERS		EA					in Duct
	TOTAL 23 33 13 DAMPERS							\$0.00
23 34 00	CENTRIGUGAL FANS							
	RETURN AIR FAN		EA					\$2,000.00
	TOTAL 23 34 00 CENTRIFUGAL FANS							\$2,000.00
23 37 00	AIR OUTLETS AND INLETS							
	TOTAL 23 37 00 AIR OUTLETS AND INLETS		EA					\$400.00
23 63 13	AIR COOLED CONDENSING UNITS							
	TOTAL 23 63 13 AIR COOLED CONDENSING UNITS	1	EA					\$100,000.00
23 73 13	AIR HANDLING UNITS							
	TOTAL 23 73 13 AIR HANDLING UNITS	1	EA					in Cond. Unit \$0.00



Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNxEA08BX

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
26 27 26	WIRING DEVICES							
	WEATHER-PROOF GFCI RECEPTACLE		EA					INCL
	TOTAL 26 27 26 WIRING DEVICES							\$0.00
26 28 12	SAFETY SWITCHES							
	DISCONNECT SWITCHES		EA					INCL
	CIRCUIT BRAKERS		EA					INCL
	TOTAL 26 28 12 SAFETY SWITCHES							\$0.00
26 52 00	EMERGENCY LIGHTING							
	Emergency Batary Pack Units		EA					INCL
	New Combination Em Light/Exit Sign		EA					INCL
	Exit Sign		EA					INCL
	Emergency Remote Head Unit		EA					INCL
	Wiremold		LF					INCL
	EMT-3/4"		LF					INCL
	CABLE #12, 10		CLF					INCL
	TOTAL 26 52 00 EMERGENCY LIGHTING							\$0.00
	SUBTOTAL ELECTRICAL WORK							\$319,000.00
28 31 01	Division 28-ELECTRONIC SAFETY & SECURITY							
	FIRE DETECTION AND ALARM							
	Temporary fire detection system		LS					INCL
	Demolition of existing system		EA					INCL
	Remove wiring and prepare existing conduit		LS					INCL
	Remove/Reinstall Snap-on Panels		LS					INCL
	New Fire Alarm Panel		EA					INCL
	Event printer		EA					INCL
	Addressable Smoke Detector		EA					INCL
	Addressable Heat Detector		EA					INCL



**Department of
Design and
Construction**

Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNXEA08BX
 Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	Pull Station		EA					INCL
	Pull Station Protective cover (Alarm)		EA					INCL
	New strobes		EA					INCL
	New horns/strobes		EA					INCL
	New horns		EA					INCL
	Interface devices W/Remote indicator		EA					INCL
	Duct Smoke Detectors		EA					INCL
	Elevator Addressible Smoke Detectors		EA					INCL
	Connections for HVAC shutdown		LS					INCL
	Install incoming Fire Alarm Fused cutoff box		EA					INCL
	Tap Main incoming service entrance feeders		LS					INCL
	Remote F/A indicating panel		EA					INCL
	Conduit - 1/2"		LF					INCL
	Conduit - 3/4"		LF					INCL
	Wiremold		LF					INCL
	EMT-3/4"		LF					INCL
	Cable-Fire rated Device gage		LF					INCL
	Cable-Fire rated Alarm gage		LF					INCL
	Transparent Enclosure		LS					INCL
	Weather-proof Sprinkler Alarm Bell W/guard		EA					INCL
	Fire Alarm Terminal box		EA					INCL
	Carbon Monoxide Monitor		EA					INCL
	Elevator Recall Monitor		EA					INCL
	Interlocking W/ADT		LS					INCL
	Back Boxes, Splicing		LS					INCL
	Scaffold rental, covers, setup and tare-down		LS					INCL
	Programming F/A System		LS					INCL
	FDNY /Testing		HR					INCL
	Permits, Filing, Etc		LS					INCL



Bid Breakdown

CONTRACT 1 - General Construction

Project: NYPL - Two Bronx Branch Libraries Replacement of HVAC and BMS
 Location: Francis Martin Branch Library, 2150 University Avenue, Bronx, NY 10453
 Bidder: C. D. E. Air Conditioning Co., Inc.

DDC ID: LNXEA08BX

Sponsor Agency: Libraries

CSI Number	Description	Quantity	Unit	Unit Cost of Material	Total Cost of Material	Unit Cost of Labor	Total Cost of Labor	Total Cost: Materials and Labor
	Conduit Fittings, Lugs		LS					INCL
	Clean, Patch, Resurface and Touch-up Paint		LS					INCL
	Single Input w/ relay		EA					INCL
	Ceiling Tiles Holes for Detectors		HR					INCL
	TOTAL 28 31 01 FIRE DETECTION AND ALARM							\$0.00
	TOTAL DIVISION 28 - ELECTRONIC SAFETY AND SECURITY							\$0.00
	PROJECT SUB-TOTAL							\$1,166,985.00
	TOTAL CLASON'S POINT AND FRANCIS MARTIN							\$1,602,379.00

**ATTACHMENT 1 – BID INFORMATION
PROJECT ID: LNXEA08BX**

DESCRIPTION AND LOCATION OF WORK:

**Two Bronx Branch Library, Replacement of HVAC & BMS, Francis Martin & Clason's
2150 University Avenue and 1215 Morrison Avenue
Bronx, 10453 and Bronx, 10472
City of New York**

DOCUMENTS AVAILABLE AT:

Department of Design and Construction, Contract Section
30-30 Thomson Avenue - First Floor, Long Island City, NY 11101

SUBMISSION OF BIDS BEFORE BID OPENING:

TIME TO SUBMIT:

On or Before: Thursday, December 28, 2017

PLACE TO SUBMIT:

Department of Design and Construction, Contract Section
30-30 Thomson Avenue - First Floor, Long Island City, NY 11101

PRE BID QUESTIONS (PBQs):

Please be advised that PBQs must be submitted to the Agency Contact Person at least five (5) business days (by 5:00 P.M. EST) prior to the bid opening date.
Email PBQ(s) - CSB_projectinquiries@ddc.nyc.gov

BID OPENING:

PLACE OF BID OPENING:	Department of Design and Construction
	Contract Section
	30-30 Thomson Avenue - First Floor
	Long Island City, NY 11101
DATE AND HOUR:	Thursday, December 28, 2017 at 2pm

NOTE: Bid documents will not be sold after

PRE-BID CONFERENCE:

PLACE	2150 University Avenue, and 1215 Morrison Avenue, Bronx 10453 and 10472
DATE AND HOUR	Thursday, December 14, 2017, at 10am
MANDATORY OR OPTIONAL	OPTIONAL

BID SECURITY:

Bid Security is required in the amount set forth below; provided, however, bid security is not required if the TOTAL BID PRICE set forth on the Bid Form is less than \$1,000,000.00.

- (1) Bond in an amount not less than 10% of the TOTAL BID PRICE set forth on the Bid Form, OR
- (2) Certified Check in an amount not less than 2% of the TOTAL BID PRICE set forth on the Bid Form.

PERFORMANCE AND PAYMENT SECURITY:

Required for Contracts in the amount of \$1,000,000.00 or more. Performance and Payment Security shall each be in amount equal to 100% of the Contract Price.

AGENCY CONTACT PERSON:

Lorraine Holley, 30-30 Thomson Avenue - First Floor, Long Island City, Queens, 11101
Telephone (718) 391-1016 Fax: (718) 391-2627

THIS PAGE INTENTIONALLY LEFT BLANK

**BID BOOKLET
PART B**

THIS PAGE INTENTIONALLY LEFT BLANK

SAFETY QUESTIONNAIRE

The bidder must include, with its bid, all information requested on this Safety Questionnaire. Failure to provide a completed and signed Safety Questionnaire at the time of bid opening may result in disqualification of the bid as non-responsive.

1. Bidder Information:

Company Name: C.D.E. Air Conditioning Co., Inc.

DDC Project Number: LNXEAO8BX

Company Size: Ten (10) employees or less
 X Greater than ten (10) employees

Company has previously worked for DDC X YES NO

2. Type(s) of Construction Work

TYPE OF WORK	LAST 3 YEARS	THIS PROJECT
General Building Construction	_____	_____
Residential Building Construction	_____	_____
Nonresidential Building Construction	_____	_____
Heavy Construction, except building	_____	_____
Highway and Street Construction	_____	_____
Heavy Construction, except highways	_____	_____
Plumbing, Heating, HVAC	X	X
Painting and Paper Hanging	_____	_____
Electrical Work	_____	_____
Masonry, Stonework and Plastering	_____	_____
Carpentry and Floor Work	_____	_____
Roofing, Siding, and Sheet Metal	_____	_____
Concrete Work	_____	_____
Specialty Trade Contracting	_____	_____
Asbestos Abatement	_____	_____
Other (specify)	_____	_____

3. Experience Modification Rate:

The Experience Modification Rate (EMR) is a rating generated by the National Council of Compensation Insurance (NCCI). This rating is used to determine the contractor's premium for worker's compensation insurance. The contractor may obtain its EMR by contacting its insurance broker or the NCCI. If the contractor cannot obtain its EMR, it must submit a written explanation as to why.

The Contractor must indicate its Intrastate and Interstate EMR for the past three years. [Note: For contractors with less than three years of experience, the EMR will be considered to be 1.00].

YEAR	INTRASTATE RATE	INTERSTATE RATE
2017	0.850	N/A
2016	0.840	N/A
2015	0.840	N/A

If the Intrastate and/or Interstate EMR for any of the past three years is greater than 1.00, the contractor must attach, to this questionnaire, a written explanation for the rating and identify what corrective action was taken to correct the situation resulting in that rating.

4. OSHA Information:

YES NO

Contractor has received a willful violation issued by OSHA or New York City Department of Buildings (NYCDOB) within the last three years.

YES NO

Contractor has had an incident requiring OSHA notification within 8 hours (all work-related fatalities) or an incident requiring OSHA notification within 24 hours (all work-related inpatient hospitalizations, all amputations and all losses of an eye).

The Occupational Safety and Health Act (OSHA) of 1970 requires employers with ten or more employees, on a yearly basis to complete and maintain on file the form entitled "Log of Work-related Injuries and Illnesses". This form is commonly referred to as the OSHA 300 Log (OSHA 200 Log for 2001 and earlier).

The OSHA 300 Log must be submitted for the last three years for contractors with more than ten employees.

The Contractor must indicate the total number of hours worked by its employees, as reflected in payroll records for the past three years.

The contractor must submit the Incident Rate for Lost Time Injuries (the Incident Rate) for the past three years. The Incident Rate is calculated in accordance with the formula set forth below. For each given year, the total number of incidents is the total number of non-fatal injuries and illnesses reported on the OSHA 300 Log. The 200,000 hours represents the equivalent of 100 employees working forty hours a week, fifty weeks per year.

Incident Rate =

$$\frac{\text{Total Number of Incidents} \times 200,000}{\text{Total Number of Hours Worked by Employees}}$$

YEAR	TOTAL NUMBERS OF HOURS WORKED BY EMPLOYEES	INCIDENT RATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

If the contractor's Incident Rate for any of the past three years is one point higher than the Incident Rate for the type of construction it performs (listed below), the contractor must attach, to this questionnaire, a written explanation for the relatively high rate.

General Building Construction	8.5
Residential Building Construction	7.0
Nonresidential Building Construction	10.2
Heavy Construction, except building	8.7
Highway and Street Construction	9.7
Heavy Construction, except highways	8.3
Plumbing, Heating, HVAC	11.3
Painting and Paper Hanging	6.9
Electrical Work	9.5
Masonry, Stonework and Plastering	10.5
Carpentry and Floor Work	12.2
Roofing, Siding, and Sheet Metal	10.3
Concrete Work	8.6
Specialty Trade Contracting	8.6

5. Safety Performance on Previous DDC Project(s)

YES NO Contractor previously audited by the DDC Office of Site Safety.

DDC Project Number(s): _____, _____, _____

YES NO Accident on previous DDC Project(s).

DDC Project Number(s): _____, _____, _____

YES NO Fatality or Life-altering Injury on DDC Project(s) within the last three years. [Examples of a life-altering injury include loss of limb, loss of a sense (e.g., sight, hearing), or loss of neurological function].

DDC Project Number(s): _____, _____, _____

Date: 1/11/18

By: 
(Signature of Owner, Partner, Corporate Officer)

Title: President

Pre-Award Process

The bidder is advised that as part of the pre-award review of its bid, it may be required to submit the information described in Sections (A) through (D) below. If required, the bidder must submit such information within five (5) business days following receipt of notification from DDC that it is among the low bidders. Such notification from DDC will be by facsimile or in writing and will specify the types of information which must be submitted.

In the event the bidder fails to submit the required information within the specified time frame, its bid may be rejected as nonresponsive.

- (A) **Project Reference Form:** If required, the bidder must complete and submit the Project Reference Form set forth on pages 28 through 30 of this Bid Booklet. The Project Reference Form consists of 3 parts: (1) Contracts Completed by the Bidder, (2) Contracts Currently Under Construction by the Bidder, and (3) Pending Contracts Not Yet Started by the Bidder.
- (B) **Copy of License:** If required, the bidder must submit a copy of the license under which the bidder will be performing the work. Such license must clearly show the following: (1) Name of the Licensee, (2) License Number, and (3) Expiration date of the License. A copy of the license will be required from bidders for the following contracts: Plumbing Work, Electrical Work and Asbestos Abatement.
- (C) **Financial Information:** If required, the bidder must submit the financial information described below:
- (1) **Audited Financial Statements:** Financial statements (Balance Sheet and Income Statement) of the entity submitting the bid, as audited by an independent auditor licensed to practice as a certified public accountant (CPA). Audited financial statements for the three most recent fiscal years must be submitted. Each such financial statement must include the auditor's standard report.
- If the bidder does not have audited financial statements, it must submit an affidavit attesting to the fact that the bidder does not have such statements. In addition, the bidder must submit the following documentation covering the three most recent fiscal years: signed federal tax returns, unaudited financial statements, and a "certified review letter" from a certified public accountant (CPA) verifying the unaudited financial statements.
- Unless the most recent audited or unaudited financial statement was issued within ninety (90) days, the bidder must submit interim financial information that includes data on financial position and results of operation (income data) for the current fiscal year. Such information may be summarized on a monthly or quarterly basis or at other intervals.
- (2) **Schedule of Aged Accounts Receivable,** including portion due within ninety (90) days.
- (D) **Project Specific Information:** If required, the bidder must submit the project specific information described below:
- (1) Statement indicating the number of years of experience the bidder has had and in what type of construction.
- (2) Resumes of all key personnel to be involved in the project, including the proposed project superintendent.
- (3) List of significant pieces of equipment expected to be used for the contract, and whether such equipment is owned or leased.

- (4) Description of work expected to be subcontracted, and to what firms, if known.
- (5) List of key material suppliers.
- (6) Preliminary bar chart time schedule
- (7) Contractor's expected means of financing the project. This should be based on the assumption that the contractor is required to finance 2X average monthly billings throughout the contract period.
- (8) Any other issues the contractor sees as impacting his ability to complete the project according to the contract.

In addition to the information described in Sections (A) through (D) above, the bidder shall submit such additional information as the Commissioner may require, including without limitation, an explanation or justification for specific unit price items.

The bidder is further advised that it may be required to attend a pre-award meeting with DDC representatives. If such a meeting is convened, the bidder will be advised as to any additional material to be provided.

A. PROJECT REFERENCES - SIMILAR CONTRACTS COMPLETED BY THE BIDDER

List all contracts substantially completed within the last 4 years similar to the contract being awarded, up to a maximum of 10, in descending order of date of substantial completion.

Project & Location	Contract Type	Contract Amount (\$000)	Date Completed	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner
Manhattan Pumping Sta. 184 Avenue D, NYC Cont. # NC-40H	Cont. # NC-40H HVAC Upgrade	\$10,665,469.	12/15/15	NYC DEP Gerald Cox 718-595-5983	Arcadis, CM Hazen & Sawyer PC. 718-609-8705
Queens Public Library 89-11 Merrick Blvd. Jamaica, NY 11432	Cont. # 3 - HVAC Proj. # IQQ122CID	\$ 8,022,011.	6/17/14	NYC DDC Patrick Moakley 718-391-1193 347-234-0258	Hill Intl., Inc. - CM Marc Zaretsky, VP 212-244-3700
Tavern on the Green Central Park, NYC 1 Tavern on the Green NYC 10023	Cont. # 1 Core and Shell Renov.	\$3,474,858.	6/17/15	NYC DDC Medhat Azer 347-203-2697	Swanke Hayden Connell Architects
Central Park Precinct Renovation, 86th Street Transverse Rd., NYC 10014	Cont. 3 - HVAC Proj. # PO79CPP	\$ 4,268,062.	1/13/14	NYC DDC Jerold Hart 718-391-2197	URS Corp. - Constr. Douglas Kerrigan 914-438-9021
Bowery Bay WPCP - BB-57H Berrian Blvd. Astoria, Queens, NY	Interim Plant Upgrade	\$26,526,564.	1/12/16	NYC DEP Gerald Cox 718-595-5983	Hazen & Sawyer, PC Eamon Kelly 212-539-7103

B. PROJECT REFERENCES - CONTRACTS CURRENTLY UNDER CONSTRUCTION BY THE BIDDER
 (See attached list of contracts in progress)

List all contracts currently under construction even if they are not similar to the contract being awarded.

Project & Location	Contract Type	Contract Amount (\$000)	Subcontracted to Others (\$000)	Uncompleted Portion (\$000)	Date Scheduled to Complete	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

C.D.E. AIR CONDITIONING CO., INC.
CONTRACTS IN PROGRESS SEPTEMBER 30, 2017

PROJECT NAME AND LOCATION	PROJECT NUMBER	CONTACT /OWNER	TEL. NO.	CONTRACT PRICE INCL C.O.'S	PERCENT COMPLETE
Animal Care & Control Center Reconstruction Staten Island, NY	20141408086	Minelli Construction Erin Egan	(631) 232-0222 (718) 391-1377	717,866	90
Appellate Court House Roof and Operational Spaces Upgrade	20161429673	Blaine Belgrave, NYC DDC Neelam Constructin Ketan Patel	(201) 768-2213	552,201	35
Asser Levy Bathhouse Boiler Reconstruction Asser Levy Place, New York NY	M164-213M	NYC Dept of Parks & Recreation Dan Merkl	(718) 760-6643	1,380,473	*
Atlantic Men's Shelter & 67th Precinct Energy Upgrades	20171417117	NYC Dept. of Design & Construction Carlyle Clinton	(347) 865-0218	2,168,483	10
Baruch College HVAC & Controls Upgrade	3048509999	Genesys Engineering Charles Klee Christopher Hollister	(914) 633-6490 (631) 974-5171 (914) 712-5840	8,590,599	79
Bill Brown Memorial Park Reconstruction of Comfort Station	B109-112M	Northe Group, Inc. Tony Zihenni	(212) 533-6070	106,575	4
Bowery Bay WTP, Contract BB-64 Main Sewage Pump Upgrades, Control & Piping	20151428773	Picone-Schiavone Daniel Villandre	(516) 361-6671	1,200,000	2
Bronx Family & Criminal Court & Health Building Energy Conservation Measures	20171413981	NYC Dept. of Design & Construction Muhammad Hussain	(718) 916-5342	7,548,998	28
Brooklyn Central Library OneNYC Energy Retrofit	20151429177	NYC Dept. of Design & Construction Carlos Rodriguez Larotta	(917) 834-3414	6,142,881	81
Bushwick Green Central Knoll Park Construction of Comfort Station	B395-115MA-1	Metro Link/NESCO Tina Fridrikson	(718) 361-0044 (917) 440-3934	158,202	1
Christopher Street Substation - PATH Replacement and Upgrade HVAC Work	PAT-624.154	Mass Electric Construction Co. Bilal Cheema	(201) 522-0781	1,031,579	*
CUNY Data Center AC-8 Replacement	CITYW-CUCF-01-09-07-GC1	EPIC Management Dermot Fenlon	(845) 521-1022	354,818	*
4 DHS Sites Energy Efficiency Measures Denotes project substantially complete	20171416940	NYC Dept. of Design & Construction Steven Thorne	(646) 617-4227	4,467,066	2

C.D.E. AIR CONDITIONING CO., INC.
CONTRACTS IN PROGRESS SEPTEMBER 30, 2017

PROJECT NAME AND LOCATION	PROJECT NUMBER	CONTACT /OWNER	TEL. NO.	CONTRACT PRICE INCL C.O.'S	PERCENT COMPLETE
New York Aquarium Restoration HVAC	BP-27 HVAC	Turner Construction Co. Jeff Mattson	(203) 209-9040	5,665,116	1
North River WWTP Contract NR-38 Cogeneration and Electrification	20171426056	Ron Speicher, Mechanical PM Yonkers Contracting Vasyl Yemchuk	(646) 721-2013 (914) 665-1500	2,100,000	1
PS 11 (Queens)	C000013556	Citnalra Construction Philip Milo	(631) 564-2614 (516) 672-8693	14,475,579	78
54-25 Skillman Avenue, Woodside, NY	C000013531	NYC SCA Mohammed Akbar	(917) 416-2608	6,661,085	*
PS 195 (Queens)	C000013495	NYC SCA	(646) 879-1762	3,271,253	*
253-50 149th Avenue, Rosedale NY 11422	C000013304	Muhammad F. Sharif Iannelli Construction	(718) 836-2000	1,236,578	*
2880 Kingsbridge Terrace Bronx, NY	41056-02	Vincent Iannelli	(518) 320-3230 (518) 729-6248	5,492,170	*
SCA Headquarters Data Center 30-30 Thomson Avenue, LIC, NY		State University Construction Fund Simon Stein, RA			
SUNY College of Optometry 33 West 42nd Street, NY NY					
Sorrentino Recreation Center Boilers / HVAC System	O446-216M 20171426761	NYC Dept. of Parks & Recreation Mikhail Kazatskiy, DPR	(917) 6352564	1,368,950	2
South West Brooklyn Marine Transfer Station 1824 Shore Parkway, Brooklyn NY	20141418737	Prismatic Develop./NYC DDC Grant MacDonald, Prismatic Dev. Mike Pepitone, Prismatic	(973) 882-1133 Cell: 445-2900	8,565,459	90
Staten Island Armory Provide Energy Efficient Retrofit	45441H	Office of General Services (OGS) Tajudeen Alaya, Building CPM Cell:		788,621	6
Susan Wagner High School, IS 323 - Black Box 1200 Manor Road, Staten Island, NY	C000013573	Vertex Companies, Inc. Andrew Sargent	(646) 296-2132 (646) 553-3500	4,212,513	*
2 DCAS Sites Energy Conservation Measures	20181403173	NYC Dept. of Design & Construction Daniela Castro	(718) 391-2488 (347) 831-1134	1,017,472	2
23 rd Precinct Station House Installation of New Cooling Towers	EPIN 56160001066	New York Police Department (NYPD) Stephen Sailer	(347) 245-8365	311,301	*
26 th Ward Water Pollution Control Plant 122-66 Flatlands Avenue, Brooklyn, New York	Project # WP-205 Contract 26W-12H	NYC DEP Joanna Heim	(718) 647-6510	12,927,364	*
26 th Ward Water Pollution Control Plant 122-66 Flatlands Avenue, Brooklyn, New York	20161410771 Contract 26W-20	Skanska-Picone, JV Patrick Tang	(516) 403-0915	3,667,064	35
The Scholars Academy IS 323 320 Beach 104th Street, Rockaway Park, NY	C000013533	NYC SCA Reinaldo Rosales	(718) 472-8237 (917) 418-3510	16,361,477	94

* Denotes project substantially complete
Contracts In Progress List 09.30.17

C. PROJECT REFERENCES – PENDING CONTRACTS NOT YET STARTED BY THE BIDDER

List all contracts awarded to or won by the bidder but not yet started.

Project & Location	Contract Type	Contract Amount (\$000)	Date Scheduled to Start	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner
Two DCAS Sites 165 Cadman Plaza East Brooklyn, New York	Energy Conserv. Measures Proj # E14-0007	\$1,017,472.	Feb. 2018	NYC DDC Daniela Castro 718-391-2488	WSP Group
280 Broadway, NYC					
Staten Island Armory 321 Manor Road Staten Island, NY 10314	Provid Energy Retrofit HVAC Work Proj No. 45441-H	\$ 788,621	Feb. 2018	NYS OGS Leonardo Chao 845-365-0730	Lewis Engrg., PC Albany, NY 12203



**OFFICE OF THE MAYOR
BUREAU OF LABOR SERVICES
CONTRACT CERTIFICATE**

To be completed if the contract is less than \$1,000,000

Contractor: _____

Address: _____

Telephone Number: _____

Name and Title of Signatory: _____

Contracting Agency or Owner: _____

Project Number: _____

Proposed Contract Amount: _____

Description and Address of Proposed Contract: _____

Names of Subcontractors in the amount of 750,000 or more on this contract (if not known at this time, so state indicating that trades will be subcontracted):

I, (fill in name of person signing) _____,
hereby affirm that I am authorized by the above-named contractor to certify that said contractor's proposed contract with the above-named owner or city agency is less than \$1,000,000. This affirmation is made in accordance with Executive Order No. 50 (1980) as amended and its implementing regulations.

Date

Signature

WILLFUL OR FRAUDULENT FALSIFICATION OF ANY DATA OR INFORMATION SUBMITTED HERewith MAY RESULT IN THE TERMINATION OF ANY CONTRACT BETWEEN THE CITY AND THE BIDDER OR CONTRACTOR AND BAR THE BIDDER OR CONTRACTOR FROM PARTICIPATION IN ANY CITY CONTRACT FOR A PERIOD OF UP TO THREE YEARS. FURTHER, SUCH FALSIFICATION MAY RESULT IN CRIMINAL PROSECUTION.

THIS PAGE INTENTIONALLY LEFT BLANK

VENDEX COMPLIANCE

(A) **Vendex Fees:** Pursuant to Procurement Policy Board Rule 2-08(f)(2), the contractor will be charged a fee for the administration of the VENDEX system, including the Vendor Name Check process, if a Vendor Name Check review is required to be conducted by the Department of Investigation. The contractor shall also be required to pay the applicable required fees for any of its subcontractors for which Vendor Name Check reviews are required. The fee(s) will be deducted from payments made to the contractor under the contract. For contracts with an estimated value of less than or equal to \$1,000,000, the fee will be \$175 per Vendor Name Check review. For contracts with an estimated value of greater than \$1,000,000, the fee will be \$350 per Vendor Name Check review.

(B) **Confirmation of Vendex Compliance:** The Bidder shall submit this Confirmation of Vendex Compliance to the Department of Design and Construction, Contracts Section, 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101.

Bid Information: The Bidder shall complete the bid information set forth below.

Name of Bidder: C.D.E. Air Conditioning Co., Inc.
Bidder's Address: 321 39th Street, Brooklyn, NY 11232
Bidder's Telephone Number: 718-788-1040
Bidder's Fax Number: 718-788-2046
Date of Bid Opening: January 11, 2018
Project ID: LNXEAO8BX

Vendex Compliance: To demonstrate compliance with Vendex requirements, the Bidder shall complete either Section (1) or Section (2) below, whichever applies.

(1) **Submission of Vendex Questionnaires to MOCS:** By signing in the space provided below, the Bidder certifies that as of the date specified below, the Bidder has submitted Vendex Questionnaires to the Mayor's Office of Contract Services, Attn: VENDEX, 253 Broadway, 9th Floor, New York, New York 10007.

Date of Submission: August 25, 2016

By: 
(Signature of Partner or corporate officer)

Print Name: Joseph F. Azara, Jr.

(2) **Submission of Certification of No Change to DDC:** By signing in the space provided below, the Bidder certifies that it has read the instructions in a "Vendor's Guide to Vendex" and that such instructions do not require the Bidder to submit Vendex Questionnaires. The Bidder has completed **TWO ORIGINALS** of the Certification of No Change set forth on the next page of this Bid Booklet.

By: 
(Signature of Partner or corporate officer)

Print Name: Joseph F. Azara, Jr.

Certificate of No Change Form

- Please fill in all the fields and DO NOT leave any field blank.
- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, Joseph F. Azara, Jr., being duly sworn, state that I have read
Enter Your Name

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

Vendor Questionnaire *This section is required.*

This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.

Name of Submitting Entity: C.D.E. Air Conditioning Co., Inc.

Vendor's Address: 321 39th Street, Brooklyn, New York 11232

Vendor's EIN or TIN: 11-2217107 Requesting Agency: NYC Dept. of Design & Constr.

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed by the submitting vendor: 08/25/16

Signature date on changed submission, if applicable, for the submitting vendor: _____

Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



	Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on Changed Submission (if applicable)
1	Joseph F. Azara, Jr., President	08/25/16	
2	Mitchell I. Merdinger, Vice-President	08/25/16	
3	Brian J. Azara, Secretary	08/25/16	
4	Christine R. Azara, Treasurer	08/25/16	
5			
6			

Check if additional changes were submitted and attach a document with the date of additional submissions.

Certification *This section is required.*

This form must be signed and notarized. Please complete this twice. Copies will not be accepted.

Certified By:

Joseph F. Azara, Jr.

Name (Print)

President

Title

C.D.E. Air Conditioning Co., Inc.

Name of Submitting Entity

Signature

1/11/18

Date

Notarized By:

Notary Public

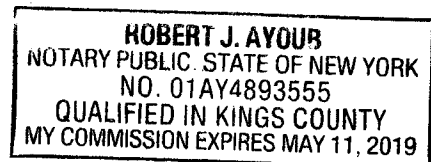
Kings

County License Issued

01AY4893555

License Number

Sworn to before me on: January 11, 2018
Date



Certificate of No Change Form

- Please fill in all the fields and DO NOT leave any field blank.
- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, Joseph F. Azara, Jr., being duly sworn, state that I have read
Enter Your Name

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

Vendor Questionnaire *This section is required.*

This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.

Name of Submitting Entity: C.D.E. Air Conditioning Co., Inc.

Vendor's Address: 321 39th Street, Brooklyn, New York 11232

Vendor's EIN or TIN: 11-2217107 Requesting Agency: NYC Dept. of Design & Constr.

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed by the submitting vendor: 08/25/16

Signature date on changed submission, if applicable, for the submitting vendor: _____

Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



	Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on Changed Submission (if applicable)
1	Joseph F. Azara, Jr., President	08/25/16	
2	Mitchell I. Merdinger, Vice-President	08/25/16	
3	Brian J. Azara, Secretary	08/25/16	
4	Christine R. Azara, Treasurer	08/25/16	
5			
6			

Check if additional changes were submitted and attach a document with the date of additional submissions.

Certification *This section is required.*

This form must be signed and notarized. Please complete this twice. Copies will not be accepted.

Certified By:

Joseph F. Azara, Jr.
Name (Print)

President
Title


C.D.E. Air Conditioning Co., Inc.
Name of Submitting Entity

Signature 1/11/18
Date

Notarized By:

Notary Public Kings
County License Issued 01AY4893555
License Number

Sworn to before me on: January 11, 2018
Date



**IRAN DIVESTMENT ACT COMPLIANCE RIDER
FOR NEW YORK CITY CONTRACTORS**

The Iran Divestment Act of 2012, effective as of April 12, 2012, is codified at State Finance Law (“SFL”) §165-a and General Municipal Law (“GML”) §103-g. The Iran Divestment Act, with certain exceptions, prohibits municipalities, including the City, from entering into contracts with persons engaged in investment activities in the energy sector of Iran. Pursuant to the terms set forth in SFL §165-a and GML §103-g, a person engages in investment activities in the energy sector of Iran if:

- (a) The person provides goods or services of twenty million dollars or more in the energy sector of Iran, including a person that provides oil or liquefied natural gas tankers, or products used to construct or maintain pipelines used to transport oil or liquefied natural gas, for the energy sector of Iran; or
- (b) The person is a financial institution that extends twenty million dollars or more in credit to another person, for forty-five days or more, if that person will use the credit to provide goods or services in the energy sector in Iran and is identified on a list created pursuant to paragraph (b) of subdivision three of Section 165-a of the State Finance Law and maintained by the Commissioner of the Office of General Services.

A bid or proposal shall not be considered for award nor shall any award be made where the bidder or proposer fails to submit a signed and verified bidder’s certification.

Each bidder or proposer must certify that it is not on the list of entities engaged in investment activities in Iran created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. In any case where the bidder or proposer cannot certify that they are not on such list, the bidder or proposer shall so state and shall furnish with the bid or proposal a signed statement which sets forth in detail the reasons why such statement cannot be made. The City of New York may award a bid to a bidder who cannot make the certification on a case by case basis if:

- (1) The investment activities in Iran were made before the effective date of this section (i.e., April 12, 2012), the investment activities in Iran have not been expanded or renewed after the effective date of this section and the person has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran; or
- (2) The City makes a determination that the goods or services are necessary for the City to perform its functions and that, absent such an exemption, the City would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

**BIDDER'S CERTIFICATION OF COMPLIANCE WITH
IRAN DIVESTMENT ACT**

Pursuant to General Municipal Law §103-g, which generally prohibits the City from entering into contracts with persons engaged in investment activities in the energy sector of Iran, the bidder/proposer submits the following certification:

[Please Check One]

BIDDER'S CERTIFICATION

By submission of this bid or proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief, that each bidder/proposer is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law.

I am unable to certify that my name and the name of the bidder/proposer does not appear on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. I have attached a signed statement setting forth in detail why I cannot so certify.

Dated: Brooklyn, New York
Jan. 11, 2018



SIGNATURE


Joseph F. Azara, Jr.

PRINTED NAME

President

TITLE

Sworn to before me this
11th day of Jan., 2018



Notary Public

ROBERT J. AYOUB
NOTARY PUBLIC STATE OF NEW YORK
NO 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

Dated: January 11, 2018

CITY OF NEW YORK

DIVISION OF LABOR SERVICES

CONSTRUCTION EMPLOYMENT REPORT

THIS PAGE INTENTIONALLY LEFT BLANK

The City of New York Department of Small Business Services
Division of Labor Services Contract Compliance Unit
110 William Street, New York, New York 10038
Phone: (212) 513 - 6323
Fax: (212) 618-8879

CONSTRUCTION EMPLOYMENT REPORT

GENERAL INFORMATION

1. Your contractual relationship in this contract is: Prime contractor Subcontractor
- 1a. Are MWBE goals attached to this project? Yes No
2. Please check one of the following if your firm would like information on how to certify with the City of New York as a:
- Minority Owned Business Enterprise Locally Based Business Enterprise
 Women Owned Business Enterprise Emerging Business Enterprise
 Disadvantaged Business Enterprise
- 2a. If you are certified as an **MBE, WBE, LBE, EBE** or **DBE**, what city/state agency are you certified with? _____ Are you DBE certified? Yes No
3. Please indicate if you would like assistance from SBS in identifying certified M/WBEs for contracting opportunities: Yes No
4. Is this project subject to a project labor agreement? Yes No
5. Are you a Union contractor? Yes No If yes, please list which local(s) you affiliated with Local Union 638 & 638B
6. Are you a Veteran owned company? Yes No

PART I: CONTRACTOR/SUBCONTRACTOR INFORMATION

7. 11-2217107 josepha@cdeair.com
Employer Identification Number or Federal Tax I.D. Email Address
8. C.D.E. Air Conditioning Co., Inc.
Company Name
9. 321 39th Street, Brooklyn, New York 11232
Company Address and Zip Code
10. Joseph F. Azara, Jr. 718-788-1040
Chief Operating Officer Telephone Number
11. Same. 718-788-1040
Designated Equal Opportunity Compliance Officer Telephone Number
(If same as Item #10, write "same")
12. Same.
Name of Prime Contractor and Contact Person
(If same as Item #8, write "same")

13. Number of employees in your company: 18

14. Contract information:

(a) NYC Dept. of Design & Constr. (b) \$ 1,754,379.
Contracting Agency (City Agency) Contract Amount

(c) 8502017LN0027C (d) _____
Procurement Identification Number (PIN) Contract Registration Number (CT#)

(e) _____ (f) _____
Projected Commencement Date Projected Completion Date

(g) Description and location of proposed contract:

Two Bronx Libraries, Replacement of HVAC & BMS
2150 University Avenue, Bronx, New York 10453
1215 Morrison Avenue, Bronx, New York 10472

15. Has your firm been reviewed by the Division of Labor Services (DLS) within the past 36 months and issued a Certificate of Approval? Yes X No ___

If yes, attach a copy of certificate. (Certificate attached)

16. Has DLS within the past month reviewed an Employment Report submission for your company and issued a Conditional Certificate of Approval? Yes ___ No X

If yes, attach a copy of certificate.

NOTE: DLS WILL NOT ISSUE A CONTINUED CERTIFICATE OF APPROVAL IN CONNECTION WITH THIS CONTRACT UNLESS THE REQUIRED CORRECTIVE ACTIONS IN PRIOR CONDITIONAL CERTIFICATES OF APPROVAL HAVE BEEN TAKEN.

17. Has an Employment Report already been submitted for a different contract (not covered by this Employment Report) for which you have not yet received compliance certificate? Yes ___ No X If yes,

Date submitted: _____

Agency to which submitted: _____

Name of Agency Person: _____

Contract No: _____

Telephone: _____

18. Has your company in the past 36 months been audited by the United States Department of Labor, Office of Federal Contract Compliance Programs (OFCCP)? Yes ___ No X

If yes,

(a) Name and address of OFCCP office.

(b) Was a Certificate of Equal Employment Compliance issued within the past 36 months?
Yes___ No___

If yes, attach a copy of such certificate.

(c) Were any corrective actions required or agreed to? Yes___ No___

If yes, attach a copy of such requirements or agreements.

(d) Were any deficiencies found? Yes___ No___

If yes, attach a copy of such findings.

19. Is your company or its affiliates a member or members of an employers' trade association which is responsible for negotiating collective bargaining agreements (CBA) which affect construction site hiring? Yes___ No X

If yes, attach a list of such associations and all applicable CBA's.

PART II: DOCUMENTS REQUIRED

20. For the following policies or practices, attach the relevant documents (e.g., printed booklets, brochures, manuals, memoranda, etc.). If the policy(ies) are unwritten, attach a full explanation of the practices. See instructions.

- (a) Health benefit coverage/description(s) for all management, nonunion and union employees (whether company or union administered)
- (b) Disability, life, other insurance coverage/description
- (c) Employee Policy/Handbook
- (d) Personnel Policy/Manual
- (e) Supervisor's Policy/Manual
- (f) Pension plan or 401k coverage/description for all management, nonunion and union employees, whether company or union administered
- (g) Collective bargaining agreement(s).
- (h) Employment Application(s)
- (i) Employee evaluation policy/form(s).
- (j) Does your firm have medical and/or non-medical (i.e. education, military, personal, pregnancy, child care) leave policy?

21. To comply with the Immigration Reform and Control Act of 1986 when and of whom does your firm require the completion of an I-9 Form?

- | | |
|--|---------------------|
| (a) Prior to job offer | Yes ___ No ___ |
| (b) After a conditional job offer | Yes ___ No ___ |
| (c) After a job offer | Yes <u>X</u> No ___ |
| (d) Within the first three days on the job | Yes ___ No ___ |
| (e) To some applicants | Yes ___ No ___ |
| (f) To all applicants | Yes ___ No ___ |
| (g) To some employees | Yes ___ No ___ |
| (h) To all employees | Yes ___ No ___ |

22. Explain where and how completed I-9 Forms, with their supportive documentation, are maintained and made accessible.
Completed at our office after a job offer. Forms are maintained at our office in our employment files.

23. Does your firm or any of its collective bargaining agreements require job applicants to take a medical examination? Yes ___ No X

If yes, is the medical examination given:

- | | |
|-----------------------------------|----------------|
| (a) Prior to a job offer | Yes ___ No ___ |
| (b) After a conditional job offer | Yes ___ No ___ |
| (c) After a job offer | Yes ___ No ___ |
| (d) To all applicants | Yes ___ No ___ |
| (e) Only to some applicants | Yes ___ No ___ |

If yes, list for which applicants below and attach copies of all medical examination or questionnaire forms and instructions utilized for these examinations.

24. Do you have a written equal employment opportunity (EEO) policy? Yes X No ___

If yes, list the document(s) and page number(s) where these written policies are located.
On file at our office.

25. Does the company have a current affirmative action plan(s) (AAP)
___ Minorities and Women
___ Individuals with handicaps
___ Other. Please specify _____

26. Does your firm or collective bargaining agreement(s) have an internal grievance procedure with respect to EEO complaints? Yes ___ No X

If yes, please attach a copy of this policy.

If no, attach a report detailing your firm's unwritten procedure for handling EEO complaints.

27. Has any employee, within the past three years, filed a complaint pursuant to an internal grievance procedure or with any official of your firm with respect to equal employment opportunity? Yes ___ No X

If yes, attach an internal complaint log. See instructions.

28. Has your firm, within the past three years, been named as a defendant (or respondent) in any administrative or judicial action where the complainant (plaintiff) alleged violation of any anti-discrimination or affirmative action laws? Yes ___ No X

If yes, attach a log. See instructions.

29. Are there any jobs for which there are physical qualifications? Yes X No ___

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).
Steamfitters, A/C Mechanics, Laborers. Employee must be physically
able to perform labor related tasks of the position.

30. Are there any jobs for which there are age, race, color, national origin, sex, creed, disability, marital status, sexual orientation, or citizenship qualifications? Yes ___ No X

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

SIGNATURE PAGE

I, (print name of authorized official signing) Joseph F. Azara, Jr. hereby certify that the information submitted herewith is true and complete to the best of my knowledge and belief and submitted with the understanding that compliance with New York City's equal employment requirements, as contained in Chapter 56 of the City Charter, Executive Order No. 50 (1980), as amended, and the implementing Rules and Regulations, is a contractual obligation. I also agree on behalf of the company to submit a certified copy of payroll records to the Division of Labor Services on a monthly basis.

C.D.E. Air Conditioning Co., Inc.

Contractor's Name

Joseph F. Azara, Jr.

President

Name of person who prepared this Employment Report

Title

Joseph F. Azara, Jr.

President

Name of official authorized to sign on behalf of the contractor

Title

718-788-1040

Telephone Number

Joseph F. Azara, Jr.

1/11/18

Signature of authorized official

Date

If contractors are found to be underutilizing minorities and females in any given trade based on Chapter 56 Section 3H, the Division of Labor Services reserves the right to request the contractor's workforce data and to implement an employment program.

Contractors who fail to comply with the above mentioned requirements or are found to be in noncompliance may be subject to the withholding of final payment.

Willful or fraudulent falsifications of any data or information submitted herewith may result in the termination of the contract between the City and the bidder or contractor and in disapproval of future contracts for a period of up to five years. Further, such falsification may result in civil and/or criminal prosecution.

To the extent permitted by law and consistent with the proper discharge of DLS' responsibilities under Charter Chapter 56 of the City Charter and Executive Order No. 50 (1980) and the implementing Rules and Regulations, all information provided by a contractor to DLS shall be confidential.

Only original signatures accepted.

Sworn to before me this 11th day of Jan., 20 18

Robert J. Ayoub
Authorized Signature

1/11/18

Date

Notary Public
ROBERT J. AYOUN
NOTARY PUBLIC STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

FORM B: PROJECTED WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice (TRN) Trainee

For each trade to be engaged by your company for this project, enter the projected workforce for Males and Females by trade classification on the charts below.

Trade:	MALES					FEMALES				
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.
Steamfitters	2									
Union Affiliation, if applicable										
Local Union 638										
Total (Col. #1-10):	3									
Total Minority, Male & Female (Col. #2,3,4,5,7,8,9, & 10):	1			1						
Total Female (Col. #6 - 10):	0									
TOT	2			1						

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM B: PROJECTED WORKFORCE

Trade:
Engineering

Union Affiliation, if applicable
N/A

Total (Col. #1-10):
10

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10):
4

Total Female
(Col. #6 - 10):
0

	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J	6	2		2						
H										
A										
TRN										
TOT	6	2		2						

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM C: CURRENT WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice (TRN) Trainee

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade:	MALES					FEMALES				
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.
Clerical	1	1					1			
Union Affiliation, if applicable										
N/A										
Total (Col. #1-10):	1	1					1			
Total Minority, Male & Female (Col. #2,3,4,5,7,8,9, & 10):										
Total Female (Col. #6 - 10):										
	J	H	A	TRN	TOT					

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Commercial

Domestic

Electric



321 - 39th Street
Brooklyn, NY 11232

Phone: (718) 788-1040
Fax: (718) 788-2046
www.cdeair.com

EQUAL EMPLOYMENT POLICY

It is the policy of C.D.E. Air Conditioning Co., Inc. not to discriminate against any employee or applicant for employment because of race, color, national origin, sex, age, disability, creed, marital status, citizenship status or sexual orientation. We will take specific action to ensure that applicants are employed and that employees are treated during employment, without regard to their race, color, national origin, sex, age, disability, creed, marital status, citizenship status, sexual orientation. Such action shall include, but not be limited to the following: recruitment, hiring, compensation, training and apprenticeship, promotion, upgrading, demotion, downgrading, transfer, lay-off and termination, and all other Terms and Conditions of Employment except as provided by law.

Mitchell I. Merdinger is the Director of our equal employment opportunity programs. As Director of C.D.E. Air Conditioning Co., Inc.'s equal employment programs the responsibility includes:

- i. Developing policy statements, equal employment programs, internal and external communication techniques and programs;
- ii. Assisting in the identification of problem areas;
- iii. Assisting line management in arriving at solutions to problems;
- iv. Designing and implementing audit and reporting systems that will:
 - a. Measure effectiveness of the policy and implementing programs including supervisors' and management's adherence to the equal opportunity policy;
 - b. Indicate need for remedial action; and
 - c. Determine the degree to which the equal employment objectives have been met.
- v. Serve as liaison between the company and enforcement agencies;
- vi. Serve as liaison between the company and minority organizations, women's organizations, advocate organizations for other protected groups and community action groups concerned with equal employment opportunity.


No Air Conditioning System Is Better Than Its Installation & Air Distribution

Page Two (Equal Employment Policy)

To ensure adherence to this policy, performance evaluations for supervisory personnel shall include ratings on their equal employment opportunity efforts and results.

Additionally, in furtherance of our equal employment opportunity commitment, C.D.E. Air Conditioning Co., Inc. shall insist that labor unions and other recruiting sources actively recruit and refer members of all protected groups for all positions; incorporate non-discriminatory provisions in all its contracts and purchase orders.

C.D.E. Air Conditioning Co., Inc.

A handwritten signature in black ink, appearing to read "Joseph F. Azara, Jr.", written in a cursive style.

Joseph F. Azara, Jr. - President



THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

January 3, 2018

ADDENDUM No. # 1

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

LNXEAO8BX

2 Bronx Branch Library, Replacement of HVAC & BMS
Francis Martin & Clason's Point


This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:


1. **The Bid Opening for the contract described below scheduled for December 28, 2016, at 2:00 pm is rescheduled to January 11, 2018 at 2:00 pm.**
Contract #1 – General Construction Work
2. **Bidders Questions and Responses to Questions:**
See Attachment A.
3. **Revisions to Drawings:**
See Attachment B.
4. **Revisions to Bid Booklet**
See Attachment C.

THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-3170, (718) 391-1016, or by fax at (718) 391-2615.


Oscar Gonzalez
Assistant Commissioner
Libraries

C.D.E. Air Cond. Co., Inc.
Name of Bidder

By: 

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

January 3, 2018

ADDENDUM No. # 1

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

LNxEA08BX

**2 Bronx Branch Library, Replacement of HVAC & BMS
Francis Martin & Clason's Point**


This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. **The Bid Opening for the contract described below scheduled for December 28, 2016, at 2:00 pm is rescheduled to January 11, 2018 at 2:00 pm.**
Contract #1 – General Construction Work
2. **Bidders Questions and Responses to Questions:**
See Attachment A.
3. **Revisions to Drawings:**
See Attachment B.
4. **Revisions to Bid Booklet**
See Attachment C.

THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-3170, (718) 391-1016, or by fax at (718) 391-2615.



Oscar Gonzalez
Assistant Commissioner
Libraries

Name of Bidder

By: _____

DDC PROJECT #: LNXEA08BX

PROJECT NAME: TWO BRONX BRANCH LIBRARIES - HVAC & BMS UPGRADE

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

No.	Bidders Questions	DDC Responses
1.	Drawing Nos. H001.00 and H002.00 for Francis Martin Branch Library are missing.	Included with this addendum.
2.	There is a control spec and sequence for Francis Martin Branch Library, but nothing for Clason's Point Branch Library. Please provide.	Sequence for operation for Clason's Point Branch Library is shown on Drawing M-006, as stated in Spec. Section 230993-11.
3.	Page 230553-8 calls for a smoke test. Is this a mistake?	No smoke test for this project, please disregard. (N/A for this project)
4.	On drawing DM.001 of Francis Martin Branch Library, you ask us to inspect, repair or replace all fire dampers. There is no count and how do we estimate replacement of an unknown quantity and sizes?	There are two (2) fire dampers that can be reused, if possible. They are identified by symbol on dwg M-002. All other fire dampers are new.
5.	Please issue a replacement page in the bid submission documents for the "Bidder's Identification of Subcontractor" page, as it has the wrong work descriptions for the two named contractors.	Included with this addendum.
6.	We are bidding the above referenced project as a GC and attended the walk-through on 12/14/17. However, we have a potential sub-contractor that wishes to visit the site. Please advise when they can visit site.	There was a scheduled bidder walk though meeting on December 14, 2017 for both sites. The bid documents provide all necessary information.
7.	Will there be an extension to the bid opening date? With the holidays, we are coming across many contractors are off and won't have time for pricing.	Extended to January 11, 2018
8.	We need the contact information for Fire Alarm company maintaining both libraries.	<p>The FA monitoring contact for information</p> <p>Mark Willner Tyco Integrated Security / Commercial Account Executive Tel: 718.289.6660 / Cell: +1.917.592.5265 47-40 21st Street 2nd floor, Long Island City, New York 11101</p>

<p>9.</p>	<p>Please clarify the allowance for Proprietary Item #2 not to exceed \$26,500 each system, can you clarify which system this allowance is applicable for?</p> <p>To which job does \$26,500 and \$16,000 apply to? Is it \$26,000 for each location or total of \$36,000 covering both locations.</p>	<p>Please refer to Addendum to General Condition Page 2A and 2b pages. In both pages, Proprietary Items are Listed with cost and Each Library Item applicable, (Francis Martin, Clason's Point Branch Library).</p> <p>1. Francis Martin Branch all three Items applicable cost will be \$ 12,000.00 + \$ 26,500.00 + \$15,000.00 = \$53,500.00</p> <p>2. Clason's Point Branch Library - Two Items are applicable \$26,500.00 + \$12,000.00 = \$38,500.00</p>
<p>10.</p>	<p>We are in the process of gathering quotes for the bid next week. However, we were just informed by both Honeywell and Tec Systems that they are not bidding this project. Tech has informed us that they don't do Honeywell web and Honeywell Corp. said they are not providing a quote due to the time frame. Please advise! Thanks!</p>	<p>There are several ATC sub-contractors that installed Honeywell systems at NYPL libraries before (For example: RJS//CSS Inc; Advanced Control Solution). Honeywell and or TEC system installation requirement by ATC sub-contractors is unchanged. No Exception.</p>
<p>11.</p>	<p>As per asbestos spec page, 028213-2, which library is this pertaining to. The drawing would indicate this.</p>	<p>Specification Page # 028213-2 is for the Francis Martin Branch library - Please refer to Page footer information.</p>
<p>12.</p>	<p>Propriety Item #2 HVAC/ATC Control, you List Honeywell for both libraries and then you have Propriety Item #3 HVAC/ATC Control you list American Auto Matrix for both libraries. We believe Propriety Item #2 should be for Francis Martin Library Honeywell and Propriety Item #3 should be for Clason's Point American Auto Matrix please confirm and correct the bid booklet page 2a&2b accordingly. Additionally, please provide the name and Telephone # of the HVAC/ATC Control Vendor that services each library.</p>	<p>Both libraries have existing American Auto-Matrix BMS systems. The scope of work for Francis Martin and Clason's Pont Library does not include replacement of the existing boilers, however both scopes include integration of new Honeywell BMS system [controlling Air Handling Units (AHU) and Rooftop Units (RTUs)] with the existing American Auto-Matrix System (controlling Boilers and Pumps.) Therefore, installation of the Aspect Controller manufactured by American Auto Matrix and reprogramming will be required at both libraries. For Francis Martin library contractor, shall read notes at detail 3, drawing M-006. Proprietary items 2 and 3 are correct.</p>

ODC PROJECT #: LNXEA08BX

PROJECT NAME: TWO BRONX BRANCH LIBRARY- REPLACEMENT OF HVAC & BMS

ATTACHMENT B – REVISIONS TO THE Drawings:

Drawing Nos. H001.00 and H002.00 included in this addendum.

DDC PROJECT #: LNXEA08BX

PROJECT NAME: TWO BRONX BRANCH LIBRARY- REPLACEMENT OF HVAC & BMS

ATTACHMENT C – REVISIONS TO THE Bid Booklet:

“Bidder’s Identification of Subcontractor” form included in this addendum.

BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

Project ID: LNXEA08BX

SUBMISSION: In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

1. **HVAC CONTRACTOR:**

Description of HVAC Work:

(Print Name)

Agreed amount to be paid Subcontractor: \$ _____

2. **ELECTRICAL CONTRACTOR:**

Description of Electrical Work:

(Print Name)

Agreed amount to be paid Subcontractor: \$ _____

BIDDER'S SIGNATURE: The Bidder must sign and complete this form in the spaces provided below:

(Bidder's Signature)

(Print Name)

(Address)

(Title)

(Phone #)

(Fax#)

(Date)

DDC PROJECT #: LNXEA08BX

PROJECT NAME: TWO BRONX BRANCH LIBRARY- REPLACEMENT OF HVAC & BMS

ATTACHMENT D – REVISIONS TO THE DRAWINGS

FMS ID: LNXEA08BX



Department of
Design and
Construction

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

Two (2) Bronx Branch Libraries - Replacement of HVAC & BMS

LOCATION: 2150 University Ave and 1215 Morrison Ave
BOROUGH: Bronx 10453 and 10472
CITY OF NEW YORK

Contractor _____

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper _____

Dated _____, 20____





Department of
Design and
Construction

PROJECT ID: LNXEA08BX

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 2 OF 3

**PROJECT LABOR AGREEMENT
INFORMATION FOR BIDDERS
CONTRACT
PERFORMANCE AND PAYMENT BONDS
SCHEDULE OF PREVAILING WAGES
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR THE PROJECT

**Two (2) Bronx Branch Libraries -
Replacement of HVAC & BMS**

LOCATION:
BOROUGH:
CITY OF NEW YORK

2150 University Ave and 1215 Morrison Ave
Bronx 10453 and 10472

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

NYPL

Greenman Pederson Inc.



Date: July 10, 2017

18-003



Department of
Design and
Construction

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 2 OF 3

**PROJECT LABOR AGREEMENT
INFORMATION FOR BIDDERS
CONTRACT
PERFORMANCE AND PAYMENT BONDS
SCHEDULE OF PREVAILING WAGES
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR THE PROJECT



2015 Project Labor Agreement

NOTICE: THIS CONTRACT IS SUBJECT TO A NEW PROJECT LABOR AGREEMENT EXECUTED IN 2015

This contract is subject to the attached Project Labor Agreement (“PLA”) entered into between the City and the Building and Construction Trades Council of Greater New York (“BCTC”) affiliated Local Unions. By submitting a bid, the Contractor agrees that if awarded the Contract the PLA is binding on the Contractor and all subcontractors of all tiers. The bidder to be awarded the contract will be required to execute the attached Letter of Assent prior to award. Contractor shall include in any subcontract a requirement that the subcontractor, and sub-subcontractors of all tiers, become signatory to and bound to the PLA with respect to the subcontracted work. Contractor will also be required to have all subcontractors of all tiers execute the attached Letter of Assent prior to such subcontractors performing any work on the Project. Bidders are advised that the City of New York and City agencies have entered into multiple PLAs. The terms of each PLA, while similar, are not identical. All bidders should carefully read the entire PLA that governs this Contract.

In addition, please note that there are significant revisions between the 2015 PLA attached to this bid and the prior Citywide Renovation PLA. The Contractor is urged to review the entire PLA. Significant changes include:

- **Micro Work Orders:** For JOCS and Requirements contracts, Task Orders or Work Orders that do not exceed \$10,000 are not subject to the PLA. See PLA Article 3, Section 1.
- **On Call Contracts:** Provisions have been added regarding the referral of workers for on call contracts where Contractors are required to respond on an expedited basis. See PLA Article 4, Section 8.
- **Grievances:** The grievance procedure governing disputes under the PLA has been clarified. See PLA Article 9, Section 1.
- **Delinquent Contractors:** Contractors and Subcontractors who do not make required payments to union funds on a timely basis are subject to requirements to submit cancelled checks or another form of proof of payment in addition to certified payroll reports when requesting payment. See PLA Article 11, Section 2.
- **Payment to Union Funds for Non-Union Workers:** Non-union Contractors with bona fide private benefit plans that satisfy the requirements of Labor Law 220 will not be required to pay into union benefit funds for “core” non-union employees (working pursuant to Article 4, Section 2 of the PLA) who are already covered under such bona fide private benefit plans. See PLA Article 11, Section 2.
- **Veterans Day:** Veterans Day has been added to the list of standard holidays. See Article 12, Section 4.
- **Reporting Pay for Weather Events:** The usual reporting pay requirement of two hours for employees who report to their work location pursuant to their regular schedule does not apply when the National Weather Service issues a Weather Advisory and the Contractor speaks to the employee at least four hours before their shift starting time. See Article 12, Section 6.

To the extent that the terms of the PLA conflict with any other terms of the invitation for bids, including the Standard Construction Contract, the terms of the PLA shall govern. For example, the PLA section that authorizes the scheduling of a four-day week, ten hours per day on straight time at the commencement of the job, PLA Article 12, section 1, overrides the Standard Construction Contract's provision concerning a five-day work week with a maximum of eight hours in a day, Standard Construction Contract Article 37.2.1. Where, however, the invitation for bids, including the Standard Construction Contract, requires the approval of the City/Department, the PLA does not supersede or eliminate that requirement.

In addition to the various provisions regarding work rules, Contractors should take special note of the requirement that Contractors and Subcontractors make payments to designated employee benefit funds. See PLA Article 11, Section 2. The PLA also contains provisions for what occurs when a Contractor or a subcontractor fails to make required payments into the benefit funds, including potentially the direct payment by the City to the benefit fund of monies owed and corresponding withholding of payments to the Contractor. See PLA Article 11, Section 2. The City strongly advises Contractors to read these provisions carefully and to include appropriate provisions in subcontracts addressing these possibilities.

This Contract is subject to the apprenticeship requirements of Labor Law §222 and to apprenticeship requirements established by the Department pursuant to Labor Law §816-b. Please be advised that the involved trades have apprenticeship programs that meet the statutory requirements of Labor Law 222(e) and the requirements set by the Department pursuant to Labor Law §816-b, Contractors and subcontractors who agree to perform the Work pursuant to the PLA are participating in such apprenticeship programs within the meaning of Labor Law §222(e) and the Department's directive.

If this Contract is subject to the Minority-Owned and Women-Owned Business Enterprise ("M/WBE") program implemented pursuant to New York City Administrative Code §6-129, the specific requirements of M/WBE participation for this Contract are set forth in Schedule B entitled the "Subcontractor Utilization Plan," and are detailed in a separate Notice to Prospective Contractors included with this bid package. If such requirements are included with this Contract, the City strongly advises Contractors to read those provisions, as well as PLA Article 4, Section 2(C), carefully. A list of certified M/WBE firms may be obtained from the Department of Small Business Services (DSBS) website at www.nyc.gov/getcertified, by emailing DSBS at MWBE@sbs.nyc.gov, by calling the DSBS certification hotline at (212) 513-6311, or by visiting or writing DSBS at 110 William St., 7th floor, New York, New York, 10038.

The local collective bargaining agreements (CBAs) that are incorporated into the PLA as PLA Schedule A Agreements are available on computer disk from the Department's Contract Officer upon the request of any prospective bidder. Please note that the "PLA Schedule A" is distinct from the Department's Schedule A that is a part of this invitation for bids.

A contact list for the participating unions is set forth after the FAQs.

Below are answers to frequently asked questions (FAQs) about this PLA:

1. **Q.** Does a Contractor need to be signatory with the unions in the NYC Building and Construction Trades Council in order to bid on projects under the PLA?
A. No, any contractor may bid by signing and agreeing to the terms of the PLA. The contractor need not be signatory with these unions by any other labor agreement or for any other project.
2. **Q.** Does a Contractor agreeing to the PLA and signing the Letter of Assent create a labor agreement with these unions outside of the project covered by the PLA?
A. No, the PLA applies only to those projects that the Contractor agrees to perform under the PLA and makes no labor agreement beyond those projects.
3. **Q.** Do the provisions of the PLA apply equally to subcontractors as well as contractors and how does the PLA affect the subcontractors that a bidder may utilize on the project?
A. Yes, the PLA applies to subcontractors and all subcontractors must agree to become party to the PLA. See PLA Art. 2, Sec. 8. Subject to the Department's approval of subcontractors pursuant to Article 17 of the Standard Construction Contract, a Contractor may use any subcontractor, union or non-union, as long as the subcontractor signs and agrees to the terms of the PLA.
4. **Q.** Are bidders required to submit Letters of Assent signed by proposed subcontractors with their bid in order to be found responsive?
A. No, bidders do not have to submit signed Letters of Assent from their subcontractors with their bid. Subcontractors, however, will be required to sign the Letter of Assent prior to being approved by the Department.
5. **Q.** May a Contractor or subcontractor use any of its existing employees to perform this work?
A. Generally labor will be referred to the Contractor from the respective signatory local unions. See PLA Article 4. However, Contractors and subcontractors may continue to use up to 12% of their existing, qualifying labor force for this work, in accordance with the terms of PLA Article 4, Section 2B. Certified M/WBEs for which participation goals are set pursuant to NYC Administrative Code §6-129 that are not signatory to any Schedule A CBAs may use their existing employees for the 2nd, 4th, 6th and 8th employee needed on the job if their contracts are valued at or under \$500,000. For contracts valued at above \$500,000 but under \$1,000,000, such certified M/WBEs may use their own employees for the 2nd, 5th and 8th employees needed on the job in accordance with the provisions of PLA Article 4, Section 2C. If additional workers are needed by these M/WBEs, the additional workers will be referred to the Contractor from the signatory local unions subject to the Contractor's right to meet 12% of the additional needs with its existing, qualifying employees.
6. **Q.** Must the City set M/WBE participation goals for the particular project or contract in order for a certified M/WBE to utilize the provisions of PLA Article 4, Section 2C?
A. No. PLA Article 4, Section 2(C) specifies what categories of M/WBEs are eligible to take advantage of this provision (i.e., those M/WBEs for which the City is

authorized to set participation goals under §6-129). For purposes of section 2(C), it is not necessary for the project to be subject to §6-129 or for the City to have actually set participation goals for the particular contract or project. The result is the same where a projects receives State funding and therefore is subject to the requirements of Article 15-A of the Executive Law.

7. **Q.** May a Contractor bring in union members from locals that are not signatory unions?
 - A.** Referrals will be from the respective signatory locals and/or locals listed in Schedule A of the PLA. Contractors may utilize 'traveler provisions' contained in the local collective bargaining agreements (local CBAs) where such provisions exist and/or in accordance with the provisions of PLA Article 4, Section 2.

8. **Q.** Does a non-union employee working under the PLA automatically become a union member?
 - A.** No, the non-union employee does not automatically become a union member by working on a project covered by the PLA. Non-union employees working under the PLA are subject to the union security provisions (i.e., union dues/agency shop fees) of the local CBAs while on the project. These employees will be enrolled in the appropriate benefit plans and earn credit toward various union benefit programs except in certain circumstances as set forth in the PLA. See PLA Article 4, Section 6 and Article 11.

9. **Q.** When will the agency shop dues payer affiliate workers become eligible for union benefits?
 - A.** Union benefit plans have their own plan documents that determine eligibility and workers will become eligible for certain benefits at different points in time. Contractors who will have agency shop dues payer affiliate workers should speak with the respective union(s) as to benefit eligibility thresholds.

10. **Q.** Are all Contractors and subcontractors working under the PLA, including non-union Contractors and Contractors signatory to collective bargaining agreements with locals other than those that are signatories to the PLA, required to make contributions to designated employee benefit funds?
 - A.** Except in certain circumstances, as described in the following paragraph, Contractors and subcontractors working under the PLA will be required to contribute on behalf of all employees covered by the PLA to established jointly trustee employee benefit funds designated in the Schedule A CBAs and required to be paid on public works under any applicable prevailing wage law. See PLA Article 11, Section 2. The Agency may withhold from amounts due the Contractor any amounts required to be paid, but not actually paid into any such fund by the Contractor or a subcontractor. See PLA Article 11, Section 2 D.

Non-union Contractors with bona fide private benefit plans that satisfy the requirements of Labor Law 220 will not be required to pay into union benefit funds for their employees working pursuant to Article 4, Section 2 (B) and (C) ("core" employees) who are already covered under their bona fide private benefit plans. Supplemental benefit funds in excess

of the annualized value of the private benefit plans will be paid to workers as additional wages in compliance with Labor Law 220. At the time of contract award, the Contractor shall make available to the contracting Agency a complete set of plan documents for each private benefit plan into which contributions will be made and/or coverage provided. The Contractor shall also provide certification from a certified public accountant as to the annualized hourly value of such benefits consistent with the requirements of Section 220. See PLA Article 11, Section 2.

11. **Q.** What happens if a Contractor or subcontractor fails to make a required payment to a designated employee benefit fund?

A. The PLA sets forth a process for unions to address a contractor or a subcontractor's failure to make required payments. The process includes potentially the direct payment by the City to the benefit fund of monies owed and the corresponding withholding of payments to the Contractor. See PLA Article 11, Section 2.

Upon notification by a union or fringe benefit fund that a Contractor is delinquent in its payment of benefits and a determination by the Agency that the union or fund has submitted appropriate documentation of such delinquency, the Agency will thereafter require the Contractor to submit cancelled checks or other equivalent proof of payment of benefit contributions with certified payroll reports for work covered by this PLA on which the Contractor is engaged.

The City strongly advises Contractors to read these provisions carefully and to include appropriate provisions in subcontracts addressing these possibilities.

12. **Q.** Does signing on to the PLA satisfy the Apprenticeship Requirements established for this bid?

A. Yes. By agreeing to perform the Work subject to the PLA, the bidder demonstrates compliance with the apprenticeship requirements imposed by this Invitation for Bids.

13. **Q.** Who decides on the number of workers needed?

A. Except as expressly limited by a specific provision of the PLA, a Contractor retains full and exclusive authority for the management of their operations, including the determination as to the number of employees to be hired and the qualifications therefore and the promotion, transfer, and layoff of its employees. See PLA Article 6, Section 1.

14. **Q.** May a contractor discharge a union referral for lack of productivity?

A. Again, except as expressly limited by a specific provision of the PLA, a Contractor retains full and exclusive authority for the management of their operations, including the right to discipline or discharge for just cause its employees. See PLA Article 6, Section 1.

15. **Q.** May a contractor assign a management person to site?

- A. Yes. Managers are not subject to the provisions of the PLA, so there is no restriction on management and/or other non-trade personnel, as long as such personnel do not perform trade functions. See Article 3, Section 1.
16. Q. Does the PLA provide a standard work day across all the signatory trades?
A. Yes, all signatory trades will work an eight (8) hour day, Monday through Friday with a day shift at straight time as the standard work week. The PLA also permits a Contractor to schedule a four day (within Monday through Friday) work week, ten (10) hours per day at straight time if announced at the commencement of the project. See PLA Article 12, Section 1. This is an example where the terms of the PLA override provisions of the Standard Construction Contract (compare with section 37.2 of the Standard Construction Contract). The standard work week may be reduced to 35 or 37 ½ hours of work in those limited circumstances where the City states in the bid documents that the Contractor will not be given access to the site to accommodate an 8 hour day. The 8 hour, 7 ½ hour or 7 hour work day must be established at the commencement of the project and may not be altered by the Contractor.
17. Q. Does the PLA create a common holiday schedule for all the signatory trades?
A. Yes, the PLA recognizes nine (9) common holidays, including Veterans Day. See PLA Article 12, Section 4.
18. Q. Does the PLA provide for a standard policy for 'shift work' across all signatory trades?
A. Yes, second and third shifts may be worked with a standard 5% premium pay. In addition, a day shift does not have to be scheduled in order to work the second and third shifts at the 1.05 hourly pay rate. See PLA Article 12, Section 3.
19. Q. May the Contractor schedule overtime work, including work on a weekend?
A. Yes, the PLA permits the Contractor to schedule overtime work, including work on weekends. See PLA Article 12, Sections 2, 3, and 5. To the extent that the Agency's approval is required before a Contractor may schedule or be paid for overtime, that approval is still required notwithstanding the PLA language.
20. Q. Are overtime payments affected by the PLA?
A. Yes, all overtime pay incurred Monday through Saturday will be at time and one half (1 ½). There will be no stacking or pyramiding of overtime pay under any circumstances. See PLA Article 12, Section 2. Sunday and holiday overtime will be paid according to each trade's CBA.
21. Q. Are there special provisions for Saturday work when a day is 'lost' during the week due to weather, power failure or other emergency?
A. Yes, when this occurs the Contractor may schedule Saturday work at weekday rates. See PLA Article 12, Section 5.
22. Q. Does the PLA contain special provisions for the manning of Temporary Services?

A. Yes. Where temporary services are required by specific request of the Agency or construction manager, they shall be provided by the Contractor's existing employees during working hours in which a shift is scheduled for employees of the Contractor. The need for temporary services during non-working hours will be determined by the Agency or construction manager. There will be no stacking of trades on temporary services. See PLA Article 15.

23. Q. What do the workers get paid when work is terminated early in a day due to inclement weather or otherwise cut short of 8 hours?

A. The PLA provides that employees who report to work pursuant to regular schedule and not given work will be paid two hours of straight time. Work terminated early for severe weather or emergency conditions will be paid only for time actually worked. In other instances where work is terminated early, the worker will be paid for a full day. See PLA Article 12, Sections 6 and 8. The usual reporting pay requirement of two hours for employees who report to their work location pursuant to their regular schedule does not apply when the National Weather Service issues a Weather Advisory and the Contractor speaks to the employee at least four hours before their shift starting time. See PLA Article 12, Section 6.

24. Q. Should a local collective bargaining agreement of a signatory union expire during the project will a work stoppage occur on a project subject to the PLA?

A. No. All the signatory unions are bound by the 'no strike' agreement as to the PLA work. Work will continue under the PLA and the otherwise expired local CBA(s) until the new local CBA(s) are negotiated and in effect. See PLA Articles 7 and 19.

25. Q. May a Contractor working under the PLA be subject to a strike or other boycott activity by a signatory union at another site while the Contractor is a signatory to the PLA?

A. Yes. The PLA applies ONLY to work under the PLA and does not regulate labor relations at other sites even if those sites are in close proximity to PLA work.

26. Q. If a Contractor has worked under other PLAs in the New York City area, are the provisions in this PLA generally the same as the others?

A. While Project Labor Agreements often look similar to each other, and particular clauses are often used in multiple agreements, each PLA is a unique document and should be examined accordingly.

27. Q. What happens if a dispute occurs between the Contractor and an employee during the project?

A. The PLA contains a grievance and arbitration process to resolve disputes between the Contractor and the employees. See PLA Article 9.

28. Q. What happens if there is a dispute between locals as to which local gets to provide employees for a particular project or a particular aspect of a project?

A. The PLA provides for jurisdictional disputes to be resolved in accordance with the NY Plan. See PLA Article 10. A copy of the NY Plan is available upon request from the

Department. The PLA provides that work is not to be disrupted or interrupted pending the resolution of any jurisdictional dispute. The work proceeds as assigned by the Contractor until the dispute is resolved. See PLA Article 10, Section 3.

29. **Q.** Does the 2015 Renovation PLA contain special provisions for JOCS or task order based Contracts?

A. The PLA does not apply to Task Orders or Work Orders that do not exceed \$10,000 issued under JOCS or Requirements Contracts otherwise subject to the PLA. See PLA Article 3, Section 1.

NYC Project Labor Agreements

CONTACT INFORMATION FOR LOCAL UNIONS (Updated May 2016)

BOILER MAKERS LOCAL NO. 5

24 Van Siclen Avenue
Floral Park, NY 11001
Phone: (516) 326-2500
Fax: (516) 326-3435
Business Manager: Steve Ludwigson

BLASTERS, DRILLRUNNERS & MINERS LOCAL NO. 29

43-12 Ditmars Blvd.
Astoria, NY, 11105
Phone: (718) 278-5800
Business Manager: Thomas Russo

BRICKLAYERS LOCAL NO. 1

4 Court Square #1
Long Island City, NY 11101
Phone: (718) 392-0525
Business Manager: Jeramiah Sullivan

CARPENTERS DISTRICT COUNCIL

395 Hudson Street, 9th Fl
New York, New York 10014
Phone: (212) 366-7500
Fax: (212) 675-3140
Business Manager: Joe Geiger
John Sheehy, D.C. Rep.

CEMENT MASONS NO. 780

150-50 14th Rd Suite 4
Whitestone, NY 11357
Phone: (718) 357-3750
Fax: (718) 357-2057
Business Manager: Gino Castingnoli

CONCRETE WORKERS DISTRICT COUNCIL NO. 16

29-18 35th Avenue
Long Island City, NY 11106
Phone: (718) 392-5077
Fax: (718) 392-5087
Business Manager: Alex Castaldi

DERRICKMEN & RIGGERS LOCAL 197

35-53 24th Street
Long Island City, NY 11101
Phone: (718) 361-6534
Fax: (718) 361-6584
Business Manager: William Hayes
Billhayes197@yahoo.com

DRYWALL TAPERS 1974

265 West 14th Street
New York, NY 10011
Phone: (212) 242-8500
Fax: (212) 242-2356
Business Manager: Sal Marsala

ELECTRICAL LOCAL NO. 3

158-11 Harry Van Arsdale, Jr. Avenue
Flushing, NY 11365
Phone: (718) 591-4000
Fax: (718) 380-8998
Business Manager: Chris Erickson
Raymond Melville, Asst. Bus. Mgr.
Construction

ELEVATOR CONSTRUCTORS NO. 1

47-24 27th Avenue
Long Island City, NY 11101
Phone: (718) 767-7004
Fax: (718) 767-6730
Business Manager: Lenny Legotte
llegotte@localoneiuec.com

ENGINEERS LOCAL NO. 14

141-57 Northern Boulevard
Flushing, NY 11354
Phone: (718) 939-0600
Fax: (718) 939-3131
Business Manager: Edwin Christian

ENGINEERS NO. 15, 15A, 15B, 15C, 15D

44-40 11th Street
Long Island City, NY 11101
Phone: (212) 929-5327
Business Manager: Tom Callahan

ENGINEERS NO. 30

16-16 Whitestone Expressway
Whitestone, NY 11357
Phone: (718) 847-8484
Fax: (718) 850-0524
Business Manager: William Lynn

ENGINEERS No. 94

331-337 West 44th Street
New York, NY 10036
Phone: (212) 245-7040
Fax: (212) 245-7886
Business Manager: Kuba Brown
kubabrown@local94.com

GLAZIERS NO. 1087

45 West 14th Street
New York, NY 10011
Phone: (212) 924-5200
Fax: (212) 255-1151
Business Manager: Steve Birmingham

**HEAT & FROST INSULATORS
AND ALLIED WORKERS
LOCAL UNION NO. 12**

35-53 24th Street
Long Island City, NY 11101
Phone: (718) 784-3456
Fax: (718) 784-8357
Business Manager: Matty Aracich
matty@insulatorslocal12.com

**HEAT & FROST INSULATORS
LOCAL UNION NO. 12A**

1536 127th Street
College Point, NY 11356
Phone: (718) 886-7226
Business Manager: Jaime Soto

IRON WORKERS DISTRICT COUNCIL

22 West 46th Street
New York, NY 10036
Phone: (212) 302-1868
Business Manager: James Mahoney
jmahoney@iwintl.org

IRON WORKERS NO. 40 (Manhattan, The Bronx & Staten Island)

451 Park Avenue South
New York, NY 10016
Phone: (212) 889-1320
Fax: (212) 779-3267
Business Manager: Bob Walsh

IRON WORKERS NO. 361 (Brooklyn & Queens)

89-19 97th Avenue
Ozone Park, NY 11416
Phone: (718) 322-1016/17
Fax: (718) 322-1053
Business Manager: Matthew Chartrand

LABORERS LOCAL NO. 78
ASBESTOS & LEAD ABATEMENT

30 Cliff Street
New York, New York 10038
Phone: (212) 227-4803
Fax: (212) 406-1800
Business Manager: Edison Severino

LABORERS, CONSTRUCTION AND
GENERAL BUILDING NO. 79

520 8th Avenue
New York, NY 10018
Phone: (212) 465-7900
Fax: (212) 465-7903
Business Manager: Michael Prohaska

LABORERS NO. 731

34-11 35th Avenue
Astoria, NY 11106
(718) 706-0720
Business Manager: Joseph D'Amato

LATHERS METAL
LOCAL NO. 46

1322 Third Avenue
New York, NY 10021
Phone: (212) 737-0500
Fax: (212) 249-1226
Business Manager: Terrance Moore

MASON TENDERS DIST. COUNCIL

520 8th Avenue
New York, NY 10018
Phone: (212) 452-9400
Fax: (212) 452-9499
Business Manager: Robert Bonanza

**METAL POLISHERS
LOCAL UNION NO. 8A-28A**

36-18 33rd Street 2nd Fl.
Long Island City, NY 11106
Phone: (718) 361-1770
Fax: (718) 361-1934
Business Manager: Hector Lopez

**MILLWRIGHT AND MACHINERY
ERECTORS LOCAL NO. 740**

89-07 Atlantic Avenue
Woodhaven, NY 11412
Phone: (718) 849-3636
Fax: (718) 849-0070
Business Manager: Joseph Geiger

**ORNAMENTAL IRON WORKERS
NO. 580**

501 West 42nd Street
New York, NY 10036
Phone: (212) 594-1662
Fax: (212) 564-2748
Business Manager: Pete Myers

**PAINTERS DISTRICT
COUNCIL NO. 9**

45 West 14th Street
New York, NY 10011
Phone: (212) 255-2950
Fax: (212) 255-1151
Business Manager: Joseph Azzopardi

**PAINTERS STRUCTURAL STEEL
NO. 806**

40 West 27th Street
New York, New York 10001
Phone: (212) 447-1838/0149
Fax: (212) 545-8386
Business Manager: Angelo Serse

**PAVERS & ROAD BUILDERS
DISTRICT COUNCIL NO. 1**

136-25 37th Avenue, Suite 502
Flushing, NY 11354
Phone: (718) 886-3310
Business Manager: Keith Lozcalzo

PLASTERS LOCAL UNION NO. 262

2241 Conner Street
Bronx, NY 10466
Phone: (718) 547-5440
Fax: (718) 547-5435
Business Manager: Michael Hubler

PLUMBERS NO. 1

158-29 Cross Bay Boulevard
Howard Beach, NY 11414
Phone: (718) 738-7500
Fax: (718) 835-0896
Business Manager: John Murphy

**PRIVATE SANITATION
LOCAL NO. 813**

45-18 Court Square, Suite 600
Long Island City, NY 11101
Phone: (718) 937-7010 ext. 244
Fax: (718) 937-7003
Business Manager: Sean Campbell

ROOFERS & WATERPROOFERS NO. 8

12-11 43rd Avenue
Long Island City, NY 11101
Phone: (718) 361-1169
Fax (718) 361-8330
Business Manager: Nick Siciliano

**SHEET METAL WORKERS
LOCAL NO. 28**

MANHATTAN OFFICE
500 Greenwich Street
New York, NY 10013
Phone: (212) 941-7700
Fax: (212) 226-0304
Business Manager: Kevin Connors

SHEET METAL WORKERS

LOCAL 137

21-42 44th Drive

Long Island City, NY 11101

Phone: (718) 937-4514

Fax: (718) 937-4113

Business Manager: Dante Dano

STEAMFITTERS LOCAL UNION

NO. 638

32-32 48th Avenue

Long Island City, NY 11101

Phone: (718) 392-3420

Fax: (718) 784-7285

Business Manager: Bob Bartels

TEAMSTERS LOCAL UNION 282

2500 Marcus Avenue

Lake Success, NY 11042

Phone: (516) 488-2822

Fax: (516) 488-4895

Business Manager: Tom Gesauldi

TEAMSTERS LOCAL UNION 814

21-42 44th Drive

Long Island City, NY 11101

Phone: (718) 609-6407

Fax: (718) 361-9610

Business Manager: Jason Ide

TILE, MARBLE & TERRAZO B.A.C.

LOCAL UNION 7

45-34 Court Square

Long Island City, NY 11101

Phone: (718) 786-7648

Fax: (718) 472-2370

Business Manager: Tom Lane

TIMBERMEN & DOCKBUILDERS LOCAL 1556

395 Hudson Street

New York, NY 10014

Phone: (212) 242-1320

Business Manager: Joseph Geiger

NYC AGENCY RENOVATION & REHAB OF CITY OWNED BUILDINGS/STRUCTURES
PLA

PROJECT LABOR AGREEMENT

COVERING SPECIFIED

**RENOVATION & REHABILITATION
OF CITY OWNED BUILDINGS AND STRUCTURES**

2015 - 2018

NYC AGENCY RENOVATION & REHAB OF CITY OWNED BUILDINGS/STRUCTURES
PLA

TABLE OF CONTENTS

	<u>Page</u>
ARTICLE 1 - PREAMBLE	1
SECTION 1. PARTIES TO THE AGREEMENT	2
ARTICLE 2 - GENERAL CONDITIONS	3
SECTION 1. DEFINITIONS.....	3
SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE.....	4
SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT	4
SECTION 4. SUPREMACY CLAUSE	4
SECTION 5. LIABILITY	5
SECTION 6. THE AGENCY	6
SECTION 7. AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS	6
SECTION 8. SUBCONTRACTING	7
ARTICLE 3-SCOPE OF THE AGREEMENT	7
SECTION 1. WORK COVERED	7
SECTION 2. TIME LIMITATIONS	9
SECTION 3. EXCLUDED EMPLOYEES.....	9
SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES.....	11
ARTICLE 4- UNION RECOGNITION AND EMPLOYMENT	12
SECTION 1. PRE-HIRE RECOGNITION.....	12

NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES PLA

SECTION 2. UNION REFERRAL 12

SECTION 3. NON-DISCRIMINATION IN REFERRALS 14

SECTION 4: MINORITY AND FEMALE REFERRALS 14

SECTION 5. CROSS AND QUALIFIED REFERRALS 16

SECTION 6. UNION DUES 16

SECTION 7. CRAFT FOREPERSONS AND GENERAL FOREPERSONS 16

SECTION 8. ON CALL REPAIR REFERRALS 17

ARTICLE 5- UNION REPRESENTATION 18

SECTION 1. LOCAL UNION REPRESENTATIVE 18

SECTION 2. STEWARDS 19

SECTION 3. LAYOFF OF A STEWARD 19

ARTICLE 6- MANAGEMENT’S RIGHTS 20

SECTION 1. RESERVATION OF RIGHTS 20

SECTION 2. MATERIALS, METHODS & EQUIPMENT 20

ARTICLE 7- WORK STOPPAGES AND LOCKOUTS 21

SECTION 1. NO STRIKES-NO LOCK OUT 21

SECTION 2. DISCHARGE FOR VIOLATION 22

SECTION 3. NOTIFICATION 22

SECTION 4. EXPEDITED ARBITRATION 23

SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION 25

ARTICLE 8 - LABOR MANAGEMENT COMMITTEE 25

NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES PLA

SECTION 1. SUBJECTS 25

SECTION 2. COMPOSITION 25

ARTICLE 9- GRIEVANCE & ARBITRATION PROCEDURE 26

SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES..... 26

SECTION 2. LIMITATION AS TO RETROACTIVITY 29

SECTION 3. PARTICIPATION BY AGENCY AND/OR CONSTRUCTION
MANAGER 29

ARTICLE 10 - JURISDICTIONAL DISPUTES 30

SECTION 1. NO DISRUPTIONS..... 30

SECTION 2. ASSIGNMENT 30

SECTION 3. NO INTERFERENCE WITH WORK..... 30

ARTICLE 11 - WAGES AND BENEFITS 31

SECTION 1. CLASSIFICATION AND BASE HOURLY RATE 31

SECTION 2. EMPLOYEE BENEFITS 31

ARTICLE 12- HOURS OF WORK, PREMIUM PAYMENTS,..... 37
SHIFTS AND HOLIDAYS..... 37

SECTION 1. WORK WEEK AND WORK DAY 37

SECTION 2. OVERTIME 38

SECTION 3. SHIFTS 39

SECTION 4. HOLIDAYS..... 40

SECTION 5. SATURDAY MAKE-UP DAYS..... 40

SECTION 6. REPORTING PAY 41

SECTION 7. PAYMENT OF WAGES..... 42

NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES PLA

SECTION 8. EMERGENCY WORK SUSPENSION 43

SECTION 9. INJURY/DISABILITY 43

SECTION 10. TIME KEEPING 43

SECTION 11. MEAL PERIOD 43

SECTION 12. BREAK PERIODS 44

ARTICLE 13 - APPRENTICES 44

SECTION 1. RATIOS 44

ARTICLE 14-SAFETY PROTECTION OF PERSON AND PROPERTY 45

SECTION 1. SAFETY REQUIREMENTS 45

SECTION 2. CONTRACTOR RULES..... 45

SECTION 3. INSPECTIONS 46

ARTICLE 15 - TEMPORARY SERVICES 46

ARTICLE 16 - NO DISCRIMINATION 46

SECTION 1. COOPERATIVE EFFORTS 46

SECTION 2. LANGUAGE OF AGREEMENT..... 47

ARTICLE 17- GENERAL TERMS 47

SECTION 1. PROJECT RULES..... 47

SECTION 2. TOOLS OF THE TRADE 47

SECTION 3. SUPERVISION..... 48

SECTION 4. TRAVEL ALLOWANCES 48

SECTION 5. FULL WORK DAY..... 48

NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES PLA

SECTION 6. COOPERATION AND WAIVER 48

ARTICLE 18. SAVINGS AND SEPARABILITY 49

SECTION 1. THIS AGREEMENT 49

SECTION 2. THE BID SPECIFICATIONS 49

SECTION 3. NON-LIABILITY 50

SECTION 4. NON-WAIVER..... 50

ARTICLE 19 - FUTURE CHANGES IN SCHEDULE A AREA
CONTRACTS 51

SECTION 1. CHANGES TO AREA CONTRACTS..... 51

SECTION 2. LABOR DISPUTES DURING AREA CONTRACT
NEGOTIATIONS 51

ARTICLE 20 - WORKERS' COMPENSATION ADR 52

SECTION 1 52

ARTICLE 21 - HELMETS TO HARDHATS 52

SECTION 1 52

SECTION 2 52

Project Labor Agreement - - Letter of Assent 96

New York City Building And Construction Trades Council Standards of
Excellence 98

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

**PROJECT LABOR AGREEMENT COVERING SPECIFIED
RENOVATION & REHABILITATION OF NEW YORK CITY OWNED
FACILITIES & STRUCTURES**

ARTICLE 1 - PREAMBLE

WHEREAS, the City of New York desires to provide for the cost efficient, safe, quality, and timely completion of certain rehabilitation and renovation work ("Program Work," as defined in Article 3) in a manner designed to afford the lowest costs to the Agencies covered by this Agreement, and the Public it represents, and the advancement of permissible statutory objectives;

WHEREAS, this Project Labor Agreement will foster the achievement of these goals, inter alia, by:

(1) providing a mechanism for responding to the unique construction needs associated with this Program Work and achieving the most cost effective means of construction, including direct labor cost savings, by the Building and Construction Trades Council of Greater New York and Vicinity and the signatory Local Unions and their members waiving various shift and other hourly premiums and other work and pay practices which would otherwise apply to Program Work;

(2) expediting the construction process and otherwise minimizing the disruption to the covered Agencies' ongoing operations at the facilities that are the subject of the Agreement;

(3) avoiding the costly delays of potential strikes, slowdowns, walkouts, picketing and other disruptions arising from work disputes, reducing jobsite friction on common situs worksites, and promoting labor harmony and peace for the duration of the Program Work;

(4) standardizing the terms and conditions governing the employment of labor on Program Work;

(5) permitting wide flexibility in work scheduling and shift hours and times to allow maximum work to be done during off hours yet at affordable pay rates;

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

- (6) permitting adjustments to work rules and staffing requirements from those which otherwise might obtain;
- (7) providing comprehensive and standardized mechanisms for the settlement of work disputes, including those relating to jurisdiction;
- (8) ensuring a reliable source of skilled and experienced labor; and
- (9) securing applicable New York State Labor Law exemptions.

WHEREAS, the Building and Construction Trades Council of Greater New York and Vicinity, its participating affiliated Local Unions and their members, desire to assist the City in meeting these operational needs and objectives as well as to provide for stability, security and work opportunities which are afforded by this Project Labor Agreement; and

WHEREAS, the Parties desire to maximize Program Work safety conditions for both workers and the community in the project area.

NOW, THEREFORE, the Parties enter into this Agreement:

SECTION 1. PARTIES TO THE AGREEMENT

This is a Project Labor Agreement (“Agreement”) entered into by the City of New York, on behalf of itself and the Agencies covered herein, including in their capacity as construction manager of covered projects and/or on behalf of any third party construction manager which may be utilized, and the Building and Construction Trades Council of Greater New York and Vicinity (“Council”) (on behalf of itself) and the signatory affiliated Local Union’s (“Unions” or “Local Unions”). The Council and each signatory Local Union hereby warrants and represents that it has been duly authorized to enter into this Agreement.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 2 - GENERAL CONDITIONS

SECTION 1. DEFINITIONS

Throughout this Agreement, the various Union parties including the Building and Construction Trades Council of Greater New York and Vicinity and its participating affiliated Local Unions, are referred to singularly and collectively as “Union(s)” or “Local Unions”; the term “Contractor(s)” shall include any Construction Manager, General Contractor and all other contractors, and subcontractors of all tiers engaged in Program Work within the scope of this Agreement as defined in Article 3; “Agency” means the following New York City agencies: the Department for the Aging (DFTA), Administration for Children’s Services (ACS), Department of Citywide Administrative Services (DCAS), Department of Correction (DOC), Department of Design and Construction (DDC), Fire Department (FDNY), Department of Homeless Services (DHS), Human Resources Administration (HRA), Department of Health and Mental Hygiene (DOHMH), Department of Parks and Recreation (DPR), Police Department (NYPD); Department of Sanitation (DSNY); the New York City Agency that awards a particular contract subject to this Agreement may be referred to hereafter as the “Agency”; when an Agency acts as Construction Manager, unless otherwise provided, it has the rights and obligations of a “Construction Manager” in addition to the rights and obligations of an Agency; the Building and Construction Trades Council of Greater New York and Vicinity is referred to as the [“BCTC” or “Council”]; and the work covered by this Agreement (as defined in Article 3) is referred to as “Program Work.”

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE

This Agreement shall not become effective unless each of the following conditions are met: the Agreement is executed by (1) the Council, on behalf of itself, (2) the participating affiliated Local Unions; and (3) the mayor of the City of New York or his designee.

SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT

This Agreement shall be binding on all participating Unions and their affiliates, the Construction Manager (in its capacity as such) and all Contractors of all tiers performing Program Work, as defined in Article 3. The Contractors shall include in any subcontract that they let for performance during the term of this Agreement a requirement that their subcontractors, of all tiers, become signatory and bound by this Agreement with respect to that subcontracted work falling within the scope of Article 3 and all Contractors (including subcontractors) performing Program Work shall be required to sign a "Letter of Assent" in the form annexed hereto as Exhibit "A". This Agreement shall be administered by the applicable Agency or a Construction Manager or such other designee as may be named by the Agency or Construction Manager, on behalf of all Contractors.

SECTION 4. SUPREMACY CLAUSE

This Agreement, together with the local Collective Bargaining Agreements appended hereto as Schedule A, represents the complete understanding of all signatories and supersedes any national agreement, local agreement or other collective bargaining agreement of any type which would otherwise apply to this Program Work, in whole or in part, except that Program Work which falls within the jurisdiction of the Operating

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Engineers Locals 14 and 15 will be performed under the terms and conditions set out in the Schedule A agreements of Operating Engineers Locals 14 and 15. The Collective Bargaining Agreements of the affiliated local unions that cover the particular type of construction work to be performed by the contractor, and as set forth in the Schedule A list of Agreements, shall be deemed the Schedule A Collective Bargaining Agreements ("Schedule A CBA") under this Agreement. Where association and independent Collective Bargaining Agreements for a particular type of construction work are both set forth in Schedule A, association members shall treat the applicable association agreement as the Schedule A CBA and independent contractors shall treat the applicable independent agreement as the Schedule A CBA. Subject to the foregoing, where a subject covered by the provisions of this Agreement is also covered by a Schedule A Collective Bargaining Agreement, the provisions of this Agreement shall prevail. It is further understood that no Contractor shall be required to sign any other agreement as a condition of performing Program Work. No practice, understanding or agreement between a Contractor and a Local Union which is not set forth in this Agreement shall be binding on this Program Work unless endorsed in writing by the Construction Manager or such other designee as may be designated by the Agency.

SECTION 5. LIABILITY

The liability of any Contractor and the liability of any Union under this Agreement shall be several and not joint. The Construction Manager and any Contractor shall not be liable for any violations of this Agreement by any other Contractor; and the

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Council and Local Unions shall not be liable for any violations of this Agreement by any other Union.

SECTION 6. THE AGENCY

The Agency (or Construction Manager where applicable) shall require in its bid specifications for all Program Work within the scope of Article 3 that all successful bidders, and their subcontractors of all tiers, become bound by, and signatory to, this Agreement. The Agency (or Construction Manager) shall not be liable for any violation of this Agreement by any Contractor. It is understood that nothing in this Agreement shall be construed as limiting the sole discretion of the Agency or Construction Manager in determining which Contractors shall be awarded contracts for Program Work. It is further understood that the Agency or Construction Manager has sole discretion at any time to terminate, delay or suspend the Program Work, in whole or part, on any Program.

**SECTION 7. AVAILABILITY AND APPLICABILITY
TO ALL SUCCESSFUL BIDDERS**

The Unions agree that this Agreement will be made available to, and will fully apply to, any successful bidder for (or subcontractor of) Program Work who becomes signatory thereto, without regard to whether that successful bidder (or subcontractor) performs work at other sites on either a union or non-union basis and without regard to whether employees of such successful bidder (or subcontractor) are, or are not, members of any unions. This Agreement shall not apply to the work of any Contractor which is performed at any location other than the site of Program Work.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 8. SUBCONTRACTING

Contractors will subcontract Program Work only to a person, firm or corporation who is or agrees to become party to this Agreement.

ARTICLE 3-SCOPE OF THE AGREEMENT

SECTION 1. WORK COVERED

Program Work shall be limited to designated rehabilitation and renovation construction contracts bid and let by an Agency (or its Construction Manager where applicable) after the effective date of this Agreement with respect to rehabilitation and renovation work performed for an Agency on City-owned property under contracts let prior to December 31, 2018. Subject to the foregoing, and the exclusions below, such Program Work shall mean any and all contracts that predominantly involve the renovation, repair, alteration, rehabilitation or expansion of an existing City-owned building or structure within the five boroughs of New York City. Examples of Program Work include, but are not limited to, the renovation, repair, alteration and rehabilitation of an existing temporary or permanent structure, or an expansion of above ground structures located in the City on a City-owned building. This Program Work shall also include JOCS contracts, demolition work, site work, asbestos and lead abatement, painting services, carpentry services, and carpet removal and installation, to the extent incidental to such building rehabilitation of City-owned buildings or structures.

It is understood that, except where the City specifically applies this Project Labor Agreement to such work in its bid documents, Program Work does not include, and this Project Labor Agreement shall not apply to, any other work, including:

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

1. Contracts let and work performed in connection with projects carried over, recycled from, or performed under bids or rebids relating to work that were bid prior to the effective date of this Agreement or after December 31, 2018;
2. Contracts procured on an emergency basis;
3. Contracts that do not exceed \$250,000;
4. Contracts for work on streets and bridges and for the closing or environmental remediation of landfills;
5. Contracts with not-for-profit corporations where the City is not awarding or performing the work performed for that entity;
6. Contracts with governmental entities where the City is not awarding or performing the work performed for that entity;
7. Contracts with electric utilities, gas utilities, telephone companies, and railroads, except that it is understood and agreed that these entities may only install their work to a demarcation point, e.g. a telephone closet or utility vault, the location of which is determined prior to construction and employees of such entities shall not be used to replace employees performing Program Work pursuant to this agreement;
8. Contracts for installation of information technology that are not otherwise Program Work;
9. Task Orders or Work Orders issued under JOCS or Requirements Contracts that do not exceed \$10,000, and JOCS or Requirements Contracts where the monetary value of such contracts predominantly involves such Task Orders or Work

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Orders; and

10. Contracts that do not exceed \$1 Million that are awarded pursuant to prequalified lists (PQLs) established by City agencies where entry on to the PQL is restricted to MWBEs, or a combination of MWBEs together with joint ventures which include at least one MWBE, or contractors who agree to subcontract at least 50% of the contract to MWBEs.

SECTION 2. TIME LIMITATIONS

In addition to falling within the scope of Article 3, Section 1, to be covered by this Agreement Program Work must be (1) advertised and let for bid after the effective date of this Agreement, and (2) let for bid prior to December 31, 2018, the expiration date of this Agreement. It is understood that this Agreement, together with all of its provisions, shall remain in effect for all such Program Work until completion, even if not completed by the expiration date of the Agreement. If Program Work otherwise falling within the scope of Article 3, Section 1 is not let for bid by the expiration date of this Agreement, this Agreement may be extended to that work by mutual agreement of the parties.

SECTION 3. EXCLUDED EMPLOYEES

The following persons are not subject to the provisions of this Agreement, even though performing Program Work:

A. Superintendents, supervisors (excluding general and forepersons specifically covered by a craft's Schedule A), engineers, professional engineers and/or licensed architects engaged in inspection and testing, quality control/assurance personnel, timekeepers, mail carriers, clerks, office workers, messengers, guards, technicians,

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

non-manual employees, and all professional, engineering, administrative and management persons;

B. Employees of the Agency, New York City, or any other municipal or State agency, authority or entity, or employees of any other public employer, even though working on the Program site while covered Program Work is underway;

C. Employees and entities engaged in off-site manufacture, modifications, repair, maintenance, assembly, painting, handling or fabrication of project components, materials, equipment or machinery or involved in deliveries to and from the Program site, except to the extent they are lawfully included in the bargaining unit of a Schedule A agreement;

D. Employees of the Construction Manager (except that in the event the Agency engages a Contractor to serve as Construction Manager, then those employees of the Construction Manager performing manual, on site construction labor will be covered by this Agreement);

E. Employees engaged in on-site equipment warranty work unless employees are already working on the site and are certified to perform warranty work;

F. Employees engaged in geophysical testing other than boring for core samples;

G. Employees engaged in laboratory, specialty testing, or inspections, pursuant to a professional services agreement between the Agency, or any of the Agency's

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

other professional consultants, and such laboratory, testing, inspection or surveying firm;
and

H. Employees engaged in on-site maintenance of installed equipment or systems which maintenance is awarded as part of a contract that includes Program Work but which maintenance occurs after installation of such equipment or system and is not directly related to construction services.

SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES

This Agreement shall not apply to those parents, affiliates, subsidiaries, or other joint or sole ventures of any Contractor which do not perform Program Work. It is agreed that this Agreement does not have the effect of creating any joint employment, single employer or alter ego status among the Agency (including in its capacity as Construction Manager) or any Contractor. The Agreement shall further not apply to any New York City or other municipal or State agency, authority, or entity other than a listed Agency and nothing contained herein shall be construed to prohibit or restrict the Agency or its employees, or any State, New York City or other municipal or State authority, agency or entity and its employees, from performing on or off-site work related to Program Work.

As the contracts involving Program Work are completed and accepted, the Agreement shall not have further force or effect on such items or areas except where inspections, additions, repairs, modifications, check-out and/or warranty work are assigned in writing (copy to Local Union involved) by the Agency (or Construction Manager) for performance under the terms of this Agreement.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 4- UNION RECOGNITION AND EMPLOYMENT

SECTION 1. PRE-HIRE RECOGNITION

The Contractors recognize the signatory Unions as the sole and exclusive bargaining representatives of all employees who are performing on-site Program Work, with respect to that work.

SECTION 2. UNION REFERRAL

A. The Contractors agree to employ and hire craft employees for Program Work covered by this Agreement through the job referral systems and hiring halls established in the Local Unions' area collective bargaining agreements. Notwithstanding this, Contractors shall have sole right to determine the competency of all referrals; to determine the number of employees required; to select employees for layoff (subject to Article 5, Section 3); and the sole right to reject any applicant referred by a Local Union, subject to the show-up payments. In the event that a Local Union is unable to fill any request for qualified employees within a 48 hour period after such requisition is made by a Contractor (Saturdays, Sundays and holidays excepted), a Contractor may employ qualified applicants from any other available source. In the event that the Local Union does not have a job referral system, the Contractor shall give the Local Union first preference to refer applicants, subject to the other provisions of this Article. The Contractor shall notify the Local Union of craft employees hired for Program Work within its jurisdiction from any source other than referral by the Union.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

B. A Contractor may request by name, and the Local will honor, referral of persons who have applied to the Local for Program Work and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 180 calendar days prior to the contract award.

No more than twelve per centum (12%) of the employees covered by this Agreement, per Contractor by craft, shall be hired through the special provisions above. Under this provision, name referrals begin with the eighth employee needed and continue on that same basis.

C. Notwithstanding Section 2(B), above, certified MWBE contractors for which participation goals are set forth in New York City Administrative Code §6-129, that are not signatory to any Schedule A CBAs, with contracts valued at or under five hundred thousand (\$500,000), may request by name, and the Local will honor, referral of the second (2nd), fourth (4th), sixth (6th), and eighth (8th) employee, who have applied to the Local for Program Work and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 180 work days prior to the contract award.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

For such contracts valued at above \$500,000 but less than \$1 million, the Local will honor referrals by name of the second (2nd), fifth (5th), and eighth (8th) employee subject to the foregoing requirements. In both cases, name referrals will thereafter be in accordance with Section 2(B), above.

D. Where a certified MWBE Contractor voluntarily enters into a Collective Bargaining Agreement (“CBA”) with a BCTC Union, the employees of such Contractor at the time the CBA is executed shall be allowed to join the Union for the applicable trade subject to satisfying the Union’s basic standards of proficiency for admission.

SECTION 3. NON-DISCRIMINATION IN REFERRALS

The Council represents that each Local Union hiring hall and referral system will be operated in a non-discriminatory manner and in full compliance with all applicable federal, state and local laws and regulations which require equal employment opportunities. Referrals shall not be affected in any way by the rules, regulations, bylaws, constitutional provisions or any other aspects or obligations of union membership, policies or requirements and shall be subject to such other conditions as are established in this Article. No employment applicant shall be discriminated against by any referral system or hiring hall because of the applicant’s union membership, or lack thereof.

SECTION 4: MINORITY, FEMALE, LOCAL AND SECTION 3 REFERRALS

In the event a Local Union either fails, or is unable to refer qualified minority or female applicants in percentages equaling the workforce participation goals adopted by the City and set forth in the Agency’s (or, if applicable, Construction Manager’s) bid

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

specifications, within 48 hours of the request for same, the Contractor may employ qualified minority or female applicants from any other available source.

In the event that the City or a City agency determines to adopt local workforce participation goals to be set forth in an Agency's (or, if applicable Construction Manager's) bid specifications, the City and BCTC will work together to seek agreement on appropriate goals to be set forth in applicable bid documents and to be subject to the provisions of this section.

For any Program Work that may become subject to requirements under Section 3 of the Housing and Urban Development Act of 1968, as amended by the Housing and Community Development Act of 1992, and any rules, including new or revised rules, that may be published thereunder, the Local Unions will acknowledge the Section 3 obligations of the Construction Manager or Contractor, as applicable, and agree to negotiate a method to implement this Article in a manner that would allow the Construction Manager or Contractor to meet its Section 3 obligations to the greatest extent feasible, and to post any required notices in the manner required by Section 3. The parties also acknowledge that the Construction Manager and Contractor may also fulfill its Section 3 requirements on Program Work by promoting opportunities for excluded employees, as defined by Article 3, Section 3 of this Agreement, on Program Work and, to the extent permitted by Section 3, by promoting opportunities for craft and other employees on non-Program Work.

SECTION 5. CROSS AND QUALIFIED REFERRALS

The Local Unions shall not knowingly refer to a Contractor an employee then employed by another Contractor working under this Agreement. The Local Unions

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

will exert their utmost efforts to recruit sufficient numbers of skilled and qualified crafts employees to fulfill the requirements of the Contractor.

SECTION 6. UNION DUES

All employees covered by this Agreement shall be subject to the union security provisions contained in the applicable Schedule A local agreements, as amended from time to time, but only for the period of time during which they are performing on-site Program Work and only to the extent of tendering payment of the applicable union dues and assessments uniformly required for union membership in the Local Unions which represent the craft in which the employee is performing Program Work. No employee shall be discriminated against at any Program Work site because of the employee's union membership or lack thereof. In the case of unaffiliated employees, the dues payment will be received by the Local Unions as an agency shop fee.

SECTION 7. CRAFT FOREPERSONS AND GENERAL FOREPERSONS

The selection of craft forepersons and/or general forepersons and the number of forepersons required shall be solely the responsibility of the Contractor except where otherwise provided by specific provisions of an applicable Schedule A, and provided that all craft forepersons shall be experienced and qualified journeypersons in their trade as determined by the appropriate Local Union. All forepersons shall take orders exclusively from the designated Contractor representatives. Craft forepersons shall be designated as working forepersons at the request of the Contractor, except when an existing local Collective Bargaining Agreement prohibits a foreperson from working when the craft persons he is leading exceed a specified number.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 8. ON CALL REPAIR REFERRALS

A. When an Agency awards a contract that requires the Contractor to have employees available on short notice to make time sensitive repairs with such contract requiring the Contractor to respond within as little as two hours from the time the Contractor is contacted by the Agency (“On Call, Repair Contract”), the Contractor will, within ten (10) days of being awarded an On Call, Repair Contract subject to this Agreement, notify the appropriate affiliated Union that it has been awarded such a contract and immediately enter into good faith negotiations with such relevant affiliated Union to establish a procedure to receive time sensitive referrals from such affiliated Union(s).

B. In the event the Contractor and the relevant affiliated Union(s) are unable to negotiate a specific, mutually agreeable procedure for on call repair referral procedure within twenty (20) days of commencement of negotiations or prior to commencement of performance of the contract, whichever is earlier, the Contractor and the relevant affiliated Unions will follow the following procedure:

1. Upon notification by a Contractor that it has been awarded an On Call Repair Contract pursuant to paragraph A above, each relevant affiliate Union shall provide the Contractor with the name and twenty four (24) hour contact information of an On Call, Repair Contract contact person for urgent on call repair referrals.

2. The relevant affiliated Unions shall prepare a list of individuals eligible and prepared for referral on an immediate basis to respond to the on call repair contractor. Such list shall be provided to and in the possession of the designated on call repair contact person for the affiliated Union and available for immediate reference.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

3. Individuals on such list must be able to comply with the Contractor's response time pursuant to contract requirements.

4. The Union's On Call, Repair Contract contact person shall respond to a contractor's request for referrals within a reasonable time of the request so that compliance with the contract shall be possible.

C. In the event that the Contractor makes a request for an on call referral that is compliant with this procedure and a Union is not able to respond to the request, that Union will be deemed to have waived the forty-eight (48) hour referral rule contained in Section 2 above and the Contractor may employ qualified applicants from any other available source that can meet contract requirements for that time sensitive on call repair work only; provided, however, that any work related to the repair work that is not of a time sensitive nature under the contract shall comply with Section 2. If a Union fails to timely refer a worker and the Contractor employs other workers, the Contractor will e-mail the agency within 72 hours and the agency will forward that e-mail to the designated Labor Management Committee contacts.

ARTICLE 5- UNION REPRESENTATION

SECTION 1. LOCAL UNION REPRESENTATIVE

Each Local Union representing on-site employees shall be entitled to designate in writing (copy to Contractor involved and Construction Manager) one representative, and/or the Business Manager, who shall be afforded access to the Program Work site during such time as bargaining unit work is occurring and subject to otherwise applicable policies pertaining to visitors to the site.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 2. STEWARDS

A. Each Affiliated Union shall have the sole discretion to designate any journey person as a Steward and an alternate Steward. The Union shall notify the Owner and/or Construction Manager as well as the Contractor of the identity of the designated Steward (and alternate) prior to the assumption of such duties. Stewards shall not exercise supervisory functions and will receive the regular rate of pay for their craft classifications. All Stewards shall be working Stewards.

B. In addition to their work as an employee, the Steward shall have the right to receive complaints or grievances and to discuss and assist in their adjustment with the Contractor's appropriate supervisor. Each Steward shall be concerned with the employees of the Steward's trade and, if applicable, subcontractors of their Contractor, but not with the employees of any other trade Contractor. No Contractor shall discriminate against the Steward in the proper performance of Union duties.

C. The Stewards shall not have the right to determine when overtime shall be worked, or who shall work overtime except pursuant to a Schedule A provision providing procedures for the equitable distribution of overtime.

SECTION 3. LAYOFF OF A STEWARD

Contractors agree to notify the appropriate Union 24 hours prior to the layoff of a Steward, except in cases of discipline or discharge for just cause. If a Steward is protected against layoff by a Schedule A provision, such provision shall be recognized to the extent the Steward possesses the necessary qualifications to perform the work required.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

In any case in which a Steward is discharged or disciplined for just cause, the Local Union involved shall be notified immediately by the Contractor.

ARTICLE 6- MANAGEMENT'S RIGHTS

SECTION 1. RESERVATION OF RIGHTS

Except as expressly limited by a specific provision of this Agreement, Contractors retain full and exclusive authority for the management of their operations including, but not limited to, the right to: direct the work force, including determination as to the number of employees to be hired and the qualifications therefore; the promotion, transfer, layoff of its employees; require compliance with the directives of the Agency including standard restrictions related to security and access to the site that are equally applicable to Agency employees, guests, or vendors; or the discipline or discharge for just cause of its employees; assign and schedule work; promulgate reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work; and, the requirement, timing and number of employees to be utilized for overtime work. No rules, customs, or practices which limit or restrict productivity or efficiency of the individual, as determined by the Contractor, Agency and/or Construction Manager and/or joint working efforts with other employees shall be permitted or observed.

SECTION 2. MATERIALS, METHODS & EQUIPMENT

There shall be no limitation or restriction upon the Contractor's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast,

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices. Contractors may, without restriction, install or use materials, supplies or equipment regardless of their source; provided, however, that where there is a Schedule "A" that includes a lawful union standards and practices clauses, then such clause as set forth in Schedule A Agreements will be complied with, unless there is a lawful Agency specification (or specification issued by a Construction Manager which would be lawful if issued by the Agency directly) that would specifically limit or restrict the Contractor's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices, and which would prevent compliance with such Schedule A clause. The on-site installation or application of such items shall be performed by the craft having jurisdiction over such work; provided, however, it is recognized that other personnel having special qualifications may participate, in a supervisory capacity, in the installation, check-off or testing of specialized or unusual equipment or facilities as designated by the Contractor. There shall be no restrictions as to work which is performed off-site for Program Work.

ARTICLE 7- WORK STOPPAGES AND LOCKOUTS

SECTION 1. NO STRIKES-NO LOCK OUT

There shall be no strikes, sympathy strikes, picketing, work stoppages, slowdowns, hand billing, demonstrations or other disruptive activity at the Program Work site for any reason by any Union or employee against any Contractor or employer. There

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

shall be no other Union, or concerted or employee activity which disrupts or interferes with the operation of the Program Work or the objectives of the Agency at any Program Work site. In addition, failure of any Union or employee to cross any picket line established by any Union, signatory or non-signatory to this Agreement, or the picket or demonstration line of any other organization, at or in proximity to a Program Work site where the failure to cross disrupts or interferes with the operation of Program Work is a violation of this Article. Should any employees breach this provision, the Unions will use their best efforts to try to immediately end that breach and return all employees to work. There shall be no lockout at a Program Work site by any signatory Contractor, Agency or Construction Manager.

SECTION 2. DISCHARGE FOR VIOLATION

A Contractor may discharge any employee violating Section 1, above, and any such employee will not be eligible thereafter for referral under this Agreement for a period of 100 days.

SECTION 3. NOTIFICATION

If a Contractor contends that any Union has violated this Article, it will notify the Local Union involved advising of such fact, with copies of the notification to the Council. The Local Union shall instruct and order, the Council shall request, and each shall otherwise use their best efforts to cause, the employees (and where necessary the Council shall use its best efforts to cause the Local Union), to immediately cease and desist from any violation of this Article. If the Council complies with these obligations it shall not be liable for the unauthorized acts of a Local Union or its members. Similarly, a Local Union

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

and its members will not be liable for any unauthorized acts of the Council. Failure of a Contractor or the Construction Manager to give any notification set forth in this Article shall not excuse any violation of Section 1 of this Article.

SECTION 4. EXPEDITED ARBITRATION

Any Contractor or Union alleging a violation of Section 1 of this Article may utilize the expedited procedure set forth below (in lieu of, or in addition to, any actions at law or equity) that may be brought.

A. A party invoking this procedure shall notify J.J. Pierson or Richard Adelman; who shall alternate (beginning with Arbitrator J.J. Pierson) as Arbitrator under this expedited arbitration procedure. If the Arbitrator next on the list is not available to hear the matter within 24 hours of notice, the next Arbitrator on the list shall be called. Copies of such notification will be simultaneously sent to the alleged violator and Council.

B. The Arbitrator shall thereupon, after notice as to time and place to the Contractor, the Local Union involved, the Council and the Construction Manager, hold a hearing within 48 hours of receipt of the notice invoking the procedure if it is contended that the violation still exists. The hearing will not, however, be scheduled for less than 24 hours after the notice required by Section 3, above.

C. All notices pursuant to this Article may be provided by telephone, telegraph, hand delivery, or fax, confirmed by overnight delivery, to the Arbitrator, Contractor, Construction Manager and Local Union involved. The hearing may be held on any day including Saturdays or Sundays. The hearing shall be completed in one session, which shall not exceed 8 hours duration (no more than 4 hours being allowed to either side

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

to present their case, and conduct their cross examination) unless otherwise agreed. A failure of any Union or Contractor to attend the hearing shall not delay the hearing of evidence by those present or the issuance of an award by the Arbitrator.

D. The sole issue at the hearing shall be whether a violation of Section 1, above, occurred. If a violation is found to have occurred, the Arbitrator shall issue a Cease and Desist Award restraining such violation and serve copies on the Contractor and Union involved. The Arbitrator shall have no authority to consider any matter in justification, explanation or mitigation of such violation or to award damages (any damages issue is reserved solely for court proceedings, if any.) The Award shall be issued in writing within 3 hours after the close of the hearing, and may be issued without an Opinion. If any involved party desires an Opinion, one shall be issued within 15 calendar days, but its issuance shall not delay compliance with, or enforcement of, the Award.

E. The Agency and Construction Manager (or such other designee of the Agency) may participate in full in all proceedings under this Article.

F. An Award issued under this procedure may be enforced by any court of competent jurisdiction upon the filing of this Agreement together with the Award. Notice of the filing of such enforcement proceedings shall be given to the Union or Contractor involved, and the Construction Manager.

G. Any rights created by statute or law governing arbitration proceedings which are inconsistent with the procedure set forth in this Article, or which interfere with compliance thereto, are hereby waived by the Contractors and Unions to whom they accrue.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

H. The fees and expenses of the Arbitrator shall be equally divided between the involved Contractor and Union.

SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION

Procedures contained in Article 9 shall not be applicable to any alleged violation of this Article, with the single exception that an employee discharged for violation of Section 1, above, may have recourse to the procedures of Article 9 to determine only if the employee did, in fact, violate the provisions of Section 1 of this Article; but not for the purpose of modifying the discipline imposed where a violation is found to have occurred.

ARTICLE 8 - LABOR MANAGEMENT COMMITTEE

SECTION 1. SUBJECTS

The Program Labor Management Committee will meet on a regular basis to: 1) promote harmonious relations among the Contractors and Unions; 2) enhance safety awareness, cost effectiveness and productivity of construction operations; 3) protect the public interests; 4) discuss matters relating to staffing and scheduling with safety and productivity as considerations; and 5) review efforts to meet applicable participation goals for MWBEs and workforce participation goals for minority and female employees.

SECTION 2. COMPOSITION

The Committee shall be jointly chaired by a designee of the Agency and the President of the Council. It may include representatives of the Local Unions and Contractors involved in the issues being discussed. The parties may mutually designate an

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

MWBE representative to participate in appropriate Committee discussions. The Committee may conduct business through mutually agreed upon sub-committees.

ARTICLE 9- GRIEVANCE & ARBITRATION PROCEDURE

SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES

Any question, dispute or claim arising out of, or involving the interpretation or application of this Agreement (other than jurisdictional disputes or alleged violations of Article 7, Section 1) shall be considered a grievance and shall be resolved pursuant to the exclusive procedure of the steps described below, provided, in all cases, that the question, dispute or claim arose during the term of this Agreement. Grievances shall include the City contract number and the Program Work address; such information is posted at the Program Work Site if already commenced, and is available in the City Record and Notice to Proceed for projects not already commenced.

Grievances as to whether a scope of work is included or excluded from this Agreement shall be submitted to the Labor Management Committee (LMC) in the first instance rather than Step 1 below. To be timely, such notice must be given no later than ten days prior to a bid opening if the grievance is challenging a determination by an Agency that the contract is not subject to this Agreement. For other grievances as to contractor scope of work issues, notice of such challenges shall be submitted to the LMC within 7 calendar days after the act, occurrence or event giving rise to the grievance. If the scope of work grievance is not resolved within 21 days of its submission to the LMC, then the grievance may proceed directly to Step 3 below.

Step 1:

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

(a) When any employee covered by this Agreement feels aggrieved by a claimed violation of this Agreement, the employee shall, through the Local Union business representative or job steward give notice of the claimed violation to the work site representative of the involved Contractor and the Construction Manager. To be timely, such notice of the grievance must be given within 7 calendar days after the act, occurrence or event giving rise to the grievance. The business representative of the Local Union or the job steward and the work site representative of the involved Contractor shall meet and endeavor to adjust the matter within 7 calendar days after timely notice has been given. If they fail to resolve the matter within the prescribed period, the grieving party, may, within 7 calendar days thereafter, pursue Step 2 of the grievance procedure by serving the involved Contractor with written copies of the grievance setting forth a description of the claimed violation, the date on which the grievance occurred, and the provisions of the Agreement alleged to have been violated. Grievances and disputes settled at Step 1 are non-precedential except as to the specific Local Union, employee and Contractor directly involved unless the settlement is accepted in writing by the Construction Manager (or designee) as creating a precedent.

(b) Should any signatory to this Agreement have a dispute (excepting jurisdictional disputes or alleged violations of Article 7, Section 1) with any other signatory to this Agreement and, if after conferring, a settlement is not reached within 7 calendar days, the dispute shall be reduced to writing and proceed to Step 2 in the same manner as outlined in subparagraph (a) for the adjustment of employee grievances.

Step 2:

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

A Step 2 grievance shall be filed with the Agency, the BCTC, the Contractor, and, if the grievance is against a subcontractor, the subcontractor. The Business Manager or designee of the involved Local Union, together with representatives of the involved Contractor, Council, the Construction Manager (or designee), and, if the grievance is against a subcontractor, the subcontractor, shall meet in Step 2 within 7 calendar days of service of the written grievance to arrive at a satisfactory settlement. The BCTC shall schedule the Step 2 meeting.

Step 3:

(a) If the grievance shall have been submitted but not resolved in Step 2, any of the participating Step 2 entities may, within 21 calendar days after the initial Step 2 meeting, submit the grievance in writing (copies to other participants, including the Construction Manager or designee) to the BCTC. In the event the matter is not resolved at Step 2, either J.J. Pierson or Richard Adelman, who shall act, alternately (beginning with Arbitrator J.J. Pierson), as the Arbitrator under this procedure, shall be designated at the Step 2 hearing and the BCTC will notify the arbitrator of his designation. After such notification by the BCTC, the local demanding arbitration shall within a reasonable time request the arbitrator to schedule the matter for an arbitration hearing date. The Labor Arbitration Rules of the American Arbitration Association shall govern the conduct of the arbitration hearing, at which all Step 2 participants shall be parties. The decision of the Arbitrator shall be final and binding on the involved Contractor, Local Union and employees and the fees and expenses of such arbitrations shall be borne equally by the involved Contractor and Local Union.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

(b) Failure of the grieving party to adhere to the time limits set forth in this Article shall render the grievance null and void. These time limits may be extended only by written consent of the Construction Manager (or designee), involved Contractor and involved Local Union at the particular step where the extension is agreed upon. The Arbitrator shall have authority to make decisions only on the issues presented to him and shall not have the authority to change, add to, delete or modify any provision of this Agreement.

SECTION 2. LIMITATION AS TO RETROACTIVITY

No arbitration decision or award, with the exception of those related to compliance with requirements to pay prevailing wages and supplements in accordance with federal or State law, may provide retroactivity of any kind exceeding 60 calendar days prior to the date of service of the written grievance on the Construction Manager and the involved Contractor or Local Union.

**SECTION 3. PARTICIPATION BY AGENCY AND/OR CONSTRUCTION
MANAGER**

The Agency and Construction Manager (or such other designee of the Agency) shall be notified by the involved Contractor of all actions at Steps 2 and 3 and, at its election, may participate in full in all proceedings at these Steps, including Step 3 arbitration.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 10 - JURISDICTIONAL DISPUTES

SECTION 1. NO DISRUPTIONS

There will be no strikes, sympathy strikes, work stoppages, slowdowns, picketing or other disruptive activity of any kind arising out of any jurisdictional dispute. Pending the resolution of the dispute, the work shall continue uninterrupted and as assigned by the Contractor. No jurisdictional dispute shall excuse a violation of Article 7.

SECTION 2. ASSIGNMENT

All Program Work assignments shall be made by the Contractor to unions affiliated with the BCTC consistent with the New York Plan for the Settlement of Jurisdictional Disputes ("New York Plan") and its Greenbook decisions, if any. Where there are no applicable Greenbook decisions, assignments shall be made in accordance with the provisions of the New York Plan and local industry practice.

SECTION 3. NO INTERFERENCE WITH WORK

There shall be no interference or interruption of any kind with the Program Work while any jurisdictional dispute is being resolved. The work shall proceed as assigned by the Contractor until finally resolved under the applicable procedure of this Article. The award shall be confirmed in writing to the involved parties. There shall be no strike, work stoppage or interruption in protest of any such award.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 11 - WAGES AND BENEFITS

SECTION 1. CLASSIFICATION AND BASE HOURLY RATE

All employees covered by this Agreement shall be classified in accordance with the work performed and paid the hourly wage rates applicable for those classifications as required by the applicable prevailing wage laws.

SECTION 2. EMPLOYEE BENEFITS

A. The Contractors agree to pay on a timely basis contributions on behalf of all employees covered by this Agreement to those established jointly trustee employee benefit funds designated in the applicable Collective Bargaining Agreements in Schedule A (in the appropriate Schedule A amounts), provided that such benefits are required to be paid on public works under any applicable prevailing wage law. Bona fide jointly trustee fringe benefit plans established or negotiated through collective bargaining during the life of this Agreement may be added if similarly required under applicable prevailing wage law. Contractors, not otherwise contractually bound to do so, shall not be required to contribute to benefits, trusts or plans of any kind which are not required by the prevailing wage law provided, however, that this provision does not relieve Contractors signatory to local collective bargaining agreement with any affiliated union from complying with the fringe benefit requirements for all funds contained in the CBA.

B. 1. Notwithstanding Section 2 (A) above, and subject to 2 (B)(2) below, Contractors who designate employees pursuant to Article 4, Section 2 (B) and (C) ("core" employees) that are not signatory to a Schedule A Agreement and who maintain bona fide private benefit plans that satisfy the requirements of Section 220 of the Labor Law, may

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

satisfy the above benefit obligation with respect to those employees by providing those employees with coverage under their private benefit plans (to the extent consistent with Section 220). The total benefit payments to be made on behalf of each such employee must be equal to the total Section 220 supplement amount and any shortfall must be paid by cash supplement to the employee.

2. A contractor that will satisfy its Section 220 obligations in accordance with subsection 2(B)(1) above shall make available to the Agency at the time of contract award a complete set of plan documents for each non-Schedule A benefit plan into which contributions will be made and/or coverage provided pursuant to the provisions of Section 2(B)(1) above. The Contractor shall also provide certification from a certified public accountant as to the annualized hourly value of such benefits consistent with the requirements of Section 220.

3. The City shall verify that the alternate benefit plan(s), together with any cash supplement to the employee, is compliant with Section 220 prior to awarding the Contractor a contract covered by this Agreement. In the event the Contractor's alternate benefit plan(s), together with any cash supplement to the employee, is determined to be compliant with Section 220 and will be utilized by the Contractor on behalf of Article 4, Section 2(B) and (C) core employees, the Local Unions have no duty to enforce the Contractor's obligations on the alternate benefit plan(s) as they are not party to the alternate plan(s) or privy to the terms and conditions of the plan obligations. In the event the City determines the alternate benefit plan(s), together with any cash supplement to the employee, is not compliant with Section 220, the Contractor may, upon executing a Letter

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

of Assent, satisfy its obligations for all employees, including core employees, by contributing to the Schedule A benefit plans in accordance with the terms of the Schedule A Agreements.

C. The Contractors agree to be bound by the written terms of the legally established jointly trustee Trust Agreements specifying the detailed basis on which payments are to be paid into, and benefits paid out of, such Trust Funds but only with regard to Program Work done under this Agreement and only for those employees to whom this Agreement requires such benefit payments.

D. 1. To the extent consistent with New York City's Procurement Policy Board Rules with respect to prompt payment, as published at www.nyc.gov/ppb, §4-06(e), and in consideration of the unions' waiver of their rights to withhold labor from a contractor or subcontractor delinquent in the payment of fringe benefits contributions ("Delinquent Contractor"); the Agency agrees that where any such union and/or fringe benefit fund shall notify the Agency, the General Contractor, and the Delinquent Contractor in writing with back-up documentation that the Delinquent Contractor has failed to make fringe benefit contributions to it as provided herein and the Delinquent Contractor shall fail, within ten (10) calendar days after receipt of such notice, to furnish either proof of such payment or notice that the amount claimed by the union and/or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

the Delinquent Contractor which the union or fringe benefit fund claims to be due it, and shall remit the amount when and so withheld to the fringe benefit fund and deduct such payment from the amounts then otherwise due and payable to the General Contractor, which payment shall, as between the General Contractor and the Agency, be deemed a payment by the Agency to the General Contractor; provided however, that in any month, such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. The union or its employee benefit funds shall include in its notification of delinquent payment of fringe benefits only such amount it asserts the Delinquent Contractor failed to pay on the specific project against which the claim is made and the union or its employee benefit funds may not include in such notification any amount such Delinquent Contractor may have failed to pay on any other City or non-City project.

2. In addition, where a union or employee benefit fund gives notice to the City that a Contractor is Delinquent as defined in subsection 2(D)(1) above and the City determines that the notice includes appropriate back-up documentation that the Contractor is delinquent, the City will promptly, but not later than twenty (20) days after receipt of the notice, provide a copy of said notice to City Agencies. In the event the City determines there is insufficient back-up documentation, it will notify the appropriate union and/or fringe benefit fund promptly, but not later than twenty (20) days after receipt of the Delinquency Notice, and shall include notice of what additional documentation is requested. Any determination by the City that there is insufficient back-up must be reasonable. This provision is intended to enhance compliance with the prevailing wage

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

law and the PLA with respect to the payment of fringe benefits, and is not intended as a substitute for the resolution of a disputed claim pursuant to any applicable law or agreement.

The City and the relevant Agency(s) will thereafter require the Delinquent Contractor to provide cancelled checks or other equivalent proof of payment of benefit contributions that have come due, to be submitted with certified payroll reports for all Program Work covered by this Agreement on which the Delinquent Contractor is engaged, for at least a one-year period or such earlier period if the Contractor is ultimately determined not be a Delinquent Contractor. Such proof of payment when required is a condition of payment of the Delinquent Contractor's invoices by any entity, including, but not limited to, the City, the relevant Agency(s), Construction Manager, General Contractor, the prime or higher level subcontractor, as is appropriate under the Delinquent Contractor's engagement. The union and the funds shall upon request receive copies of the certified payrolls, cancelled checks, or other proof of payment from the City and/or the relevant Agency(s).

E. In the event the General Contractor or Delinquent Contractor shall notify the Agency as above provided that the claim of the union or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by the Delinquent Contractor that the union and/or fringe benefit fund claims to be due it, pending resolution of the dispute pursuant to the union's Schedule A agreement, and the amount shall be paid to the party or parties ultimately determined to be entitled thereto, or held until the

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Delinquent Contractor and union or employee benefit fund shall otherwise agree as to the disposition thereof; provided however, that such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. In the event the Agency shall be required to withhold amounts from a General Contractor for the benefit of more than one fringe benefit fund, the amounts so withheld in the manner and amount prescribed above shall be applied to or for such fund in the order in which the written notices of nonpayment have been received by the Agency, and if more than one such notice was received on the same day, proportionately based upon the amount of the union and/or fringe benefit fund claims received on such day. Nothing herein contained shall prevent the Agency from commencing an interpleader action to determine entitlement to a disputed payment in accordance with section one thousand six of the civil practice law and rules or any successor provision thereto.

F. Payment to a fringe benefit fund under this provision shall not relieve the General Contractor or Delinquent Contractor from responsibility for the work covered by the payment. Except as otherwise provided, nothing contained herein shall create any obligation on the part of the Agency to pay any union or fringe benefit fund, nor shall anything provided herein serve to create any relationship in contract or otherwise, implied or expressed, between the union/fund and/or fringe benefit and the Agency.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 12- HOURS OF WORK, PREMIUM PAYMENTS,

SHIFTS AND HOLIDAYS

SECTION 1. WORK WEEK AND WORK DAY

A. The standard work week shall consist of 40 hours of work at straight time rates, Monday through Friday, 8 hours per day, plus ½ hour unpaid lunch period. The standard work week may be reduced to 35 or 37 ½ hours of work at straight time rates, Monday to Friday, 7 or 7 ½ hours per day, plus ½ hour unpaid lunch period in those limited circumstances where the City states in the bid documents that the Contractor will not be given access to the site to accommodate an 8 hour day. The 8 hour, 7 ½ hour or 7 hour work day must be established at the commencement of the project and may not be altered by the Contractor.

B. In accordance with Program needs, there shall be flexible start times with advance notice from Contractor to the Union. The Day Shift shall commence between the hours of 6:00 a.m. and 9:00 a.m. and shall end between the hours of 2:30 p.m. and 5:30 p.m., for an 8 hour day, and up to 7:30 p.m. for a 10 hour day. The Evening Shift shall commence between the hours of 3:00 p.m. and 6:00 p.m., unless different times are necessitated by the Agency's phasing plans on specific projects. The Night Shift shall commence between the hours of 11:00 p.m. and 2:00 a.m., unless different times are necessitated by the Agency's phasing plans on specific projects. Subject to the foregoing, starting and quitting times shall occur at the Program Work site designated by the Contractor.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

C. Scheduling — Except as provided above, Monday through Friday is the standard work week; 8 hours of work plus ½ hour unpaid lunch. Notwithstanding any other provision of this Agreement, a contractor may schedule a four day work week, 10 hours per day at straight time rates, plus a ½ hour unpaid lunch, at the commencement of the job.

D. Notice - Contractors shall provide not less than 5 days prior notice to the Local Union involved as to the work week and work hour schedules to be worked or such lesser notice as may be mutually agreed upon.

SECTION 2. OVERTIME

Overtime shall be paid for any work (i) over an employee's regularly scheduled work day, i.e., work over eight (8) hours in a day where 5/8s is scheduled, work over ten (10) hours in a day where 4/10s is scheduled, or work over seven (7) or seven and one half (7 ½) hours where such hours are scheduled pursuant to Article 12, section 1(A) and (ii) over forty (40) hours in a week, or over thirty five (35) or thirty seven and one-half (37 ½) where such hours are scheduled pursuant to Article 12, section 1(A). Overtime shall be paid at time and one half (1½) Monday through Saturday. All overtime work performed on Sunday and Holidays will be paid pursuant to the applicable Schedule A. There shall be no stacking or pyramiding of overtime pay under any circumstances. There will be no restriction upon the Contractor's scheduling of overtime or the nondiscriminatory designation of employees who shall be worked, including the use of employees, other than those who have worked the regular or scheduled work week, at straight time rates. The Contractor shall have the right to schedule work so as to minimize

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

overtime or schedule overtime as to some, but not all, of the crafts and whether or not of a continuous nature.

SECTION 3. SHIFTS

A. Flexible Schedules - Scheduling of shift work, including Saturday and Sunday work, shall be within the discretion of the Contractor in order to meet Program Work schedules and existing Program Work conditions including the minimization of interference with the mission of the Agency. It is not necessary to work a day shift in order to schedule a second or third shift, or a second shift in order to schedule a third shift, or to schedule all of the crafts when only certain crafts or employees are needed. Shifts must have prior approval of the Agency or Construction Manager, and must be scheduled with not less than five work days notice to the Local Union or such lesser notice as may be mutually agreed upon.

B. Second and/or Third Shifts/Saturday and/or Sunday Work - - The second shift shall start between 3 p.m. and 6 p.m. and the third shift shall start between 11 p.m. and 2 a.m., subject to different times necessitated by the Agency phasing plans on specific projects. There shall be no reduction in shift hour work. With respect to second and third shift work there shall be a 5% shift premium. No other premium or other payments for such work shall be required unless such work is in excess of the employee's regularly scheduled work week, i.e., 40 hours in the week or thirty five (35) or thirty seven and one half (37 ½) pursuant to Article 12, section 1(A). All employees within a classification performing Program Work will be paid at the same wage rate regardless of the shift or work scheduled work, subject only to the foregoing provisions.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

C. Flexible Starting Times - Shift starting times will be adjusted by the Contractor as necessary to fulfill Program Work requirements subject to the notice requirements of paragraph A.

SECTION 4. HOLIDAYS

A. Schedule - There shall be nine (9) recognized holidays on the Project:

New Year's Day

Martin Luther King Day President's Day

Memorial Day Veteran's Day

Labor Day Thanksgiving Day

Independence Day Christmas Day

All said holidays shall be observed on the calendar date except those holidays which occur on Saturday shall be observed on the previous Friday and those that occur on Sunday shall be observed on the following Monday.

B. Payment - Regular holiday pay, if any, for work performed on such a recognized holiday shall be in accordance with the applicable Schedule A.

C. Exclusivity - No holidays other than those listed in Section 4(A) above shall be recognized or observed.

SECTION 5. SATURDAY MAKE-UP DAYS

When severe weather, power failure, fire or natural disaster or other similar circumstances beyond the control of the Contractor prevent work from being performed on

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

a regularly scheduled weekday, the Contractor may schedule a Saturday make-up day and such time shall be scheduled and paid as if performed on a weekday. Any other Saturday work shall be paid at time and one-half (1½). The Contractor shall notify the Local Union on the missed day or as soon thereafter as practicable if such a make-up day is to be worked.

SECTION 6. REPORTING PAY

A. Employees who report to the work location pursuant to their regular schedule and who are not provided with work shall be paid two hours reporting pay at straight time rates. An employee whose work is terminated early by a Contractor due to severe weather, power failure, fire or natural disaster or for similar circumstances beyond the Contractor's control, shall receive pay only for such time as is actually worked. In other instances in which an employee's work is terminated early (unless provided otherwise elsewhere in this Agreement), the employee shall be paid for his full shift. Contractors shall not be permitted to call, text or email or voicemail employees in advance of their regularly scheduled shift starting time to avoid reporting pay. Notwithstanding the above, in the event that the National Weather Service issues a weather advisory for the area in which the work location is situated, and the entire project is shut down as a result of the Weather Advisory, the contractor shall be permitted to speak to employees no less than four (4) hours in advance of their shift starting time, unless the Local Union consents to a shorter notice in writing, to advise them not to report to work due to the National Weather Service advisory, and employees who are so notified shall not receive two (2) hours reporting pay if they report to the work location. The contractor shall make every effort to

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

notify each employee directly and confirm that notification has been received. Voice, text, and email messages left for employees without confirmation of delivery and receipt by employee do not constitute sufficient notice under this provision.

B. When an employee, who has completed their scheduled shift and left the Program Work site, is "called out" to perform special work of a casual, incidental or irregular nature, the employee shall receive overtime pay at the rate of time and one-half of the employee's straight time rate for hours actually worked.

C. When an employee leaves the job or work location of their own volition or is discharged for cause or is not working as a result of the Contractor's invocation of Section 7 below, they shall be paid only for the actual time worked.

D. Except as specifically set forth in this Article there shall be no premiums, bonuses, hazardous duty, high time or other special premium payments or reduction in shift hours of any kind.

E. There shall be no pay for time not actually worked except as specifically set forth in this Article and except where an applicable Schedule A requires a full weeks' pay for forepersons.

SECTION 7. PAYMENT OF WAGES

A. Termination- Employees who are laid off or discharged for cause shall be paid in full for that which is due them at the time of termination. The Contractor shall also provide the employee with a written statement setting forth the date of lay off or discharge.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 8. EMERGENCY WORK SUSPENSION

A Contractor may, if considered necessary for the protection of life and/or safety of employees or others, suspend all or a portion of Program Work. In such instances, employees will be paid for actual time worked, except that when a Contractor requests that employees remain at the job site available for work, employees will be paid for that time at their hourly rate of pay.

SECTION 9. INJURY/DISABILITY

An employee who, after commencing work, suffers a work-related injury or disability while performing work duties, shall receive no less than a full day's pay in accordance with the employee's regularly scheduled work day under Article 12, section (1)(A). Further, the employee shall be rehired at such time as able to return to duties provided there is still Program Work available for which the employee is qualified and able to perform.

SECTION 10. TIME KEEPING

A Contractor may utilize brassing or other systems to check employees in and out. Each employee must check in and out. The Contractor will provide adequate facilities for checking in and out in an expeditious manner.

SECTION 11. MEAL PERIOD

A Contractor shall schedule an unpaid period of not more than 1/2 hour duration at the work location between the 3rd and 5th hour of the scheduled shift. A Contractor may, for efficiency of operation, establish a schedule which coordinates the meal periods of two or more crafts or which provides for staggered lunch periods within a

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

craft or trade. If an employee is required to work through the meal period, the employee shall be compensated in a manner established in the applicable Schedule A.

SECTION 12. BREAK PERIODS

There will be no rest periods, organized coffee breaks or other non-working time established during working hours. Individual coffee containers will be permitted at the employee's work location. Where 4/10s are being worked there shall be a morning and an afternoon coffee break.

ARTICLE 13 - APPRENTICES

SECTION 1. RATIOS

Recognizing the need to maintain continuing supportive programs designed to develop adequate numbers of competent workers in the construction industry and to provide craft entry opportunities for minorities, women and economically disadvantaged non-minority males, Contractors will employ apprentices in their respective crafts to perform such work as is within their capabilities and which is customarily performed by the craft in which they are indentured. Contractors may utilize apprentices and such other appropriate classifications in the maximum ratio permitted by the New York State Department of Labor or the maximum allowed per trade. Apprentices and such other classifications as are appropriate shall be employed in a manner consistent with the provisions of the appropriate Schedule A. The parties encourage, as an appropriate source of apprentice recruitment consistent with the rules and operations of the affiliated unions' apprentice-programs, the use of the Edward J. Malloy Initiative for Construction Skills, Non-Traditional Employment for Women and Helmets to Hardhats.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 14-SAFETY PROTECTION OF PERSON AND PROPERTY

SECTION 1. SAFETY REQUIREMENTS

Each Contractor will ensure that applicable OSHA and safety requirements are at all times maintained on the Program Work site and the employees and Unions agree to cooperate fully with these efforts to the extent consistent with their rights and obligations under the law. Employees will cooperate with employer safety policies and will perform their work at all times in a safe manner and protect themselves and the property of the Contractor and Agency from injury or harm, to the extent consistent with their rights and obligations under the law. Failure to do so will be grounds for discipline, including discharge.

SECTION 2. CONTRACTOR RULES

Employees covered by this Agreement shall at all times be bound by the reasonable safety, security, and visitor rules as established by the Contractors and the Construction Manager for this Program Work. Such rules will be published and posted in conspicuous places throughout the Program Work sites. Any site security and access policies established by the Construction Manager or General Contractor intended for specific application to the construction workforce for Program Work and that are not established pursuant to an Agency directive shall be implemented only after notice to the BCTC and its affiliates and an opportunity for negotiation and resolution by the Labor Management Committee.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 3. INSPECTIONS

The Contractors and Construction Manager retain the right to inspect incoming shipments of equipment, apparatus, machinery and construction materials of every kind.

ARTICLE 15 - TEMPORARY SERVICES

Temporary services, i.e. all temporary heat, climate control, water, power and light, shall only be required upon the determination of the Agency or Construction Manager, and when used shall be staffed and assigned to the appropriate trade(s) with jurisdiction. Temporary services shall be provided by the appropriate Contractors' existing employees during working hours in which a shift is scheduled for employees of this Contractor. The Agency or Construction Manager may determine the need for temporary services requirements during non-working hours, and when used shall be staffed and assigned to the appropriate trades(s). There shall be no stacking of trades on temporary services, provided this does not constitute a waiver of primary trade jurisdiction. In the event a temporary system component is claimed by multiple trades, the matter shall be resolved through the New York Plan for Jurisdictional Disputes.

ARTICLE 16 - NO DISCRIMINATION

SECTION 1. COOPERATIVE EFFORTS

The Contractors and Unions agree that they will not discriminate against any employee or applicant for employment because of creed, race, color, religion, sex, sexual orientation, national origin, marital status, citizenship status, disability, age or any other status provided by law, in any manner prohibited by law or regulation.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 2. LANGUAGE OF AGREEMENT

The use of the masculine or feminine gender in this Agreement shall be construed as including both genders.

ARTICLE 17- GENERAL TERMS

SECTION 1. PROJECT RULES

A. The Construction Manager and the Contractors shall establish such reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work. These rules will be explained at the pre-job conference and posted at the Program Work sites and may be amended thereafter as necessary. Notice of amendments will be provided to the appropriate Local Union. Failure of an employee to observe these rules and regulations shall be grounds for discipline, including discharge. The fact that no order was posted prohibiting a certain type of misconduct shall not be a defense to an employee disciplined or discharged for such misconduct when the action taken is for cause.

B. The parties adopt and incorporate the BCTC's Standards of Excellence as annexed hereto as Exhibit "B".

SECTION 2. TOOLS OF THE TRADE

The welding/cutting torch and chain fall are tools of the trade having jurisdiction over the work performed. Employees using these tools shall perform any of the work of the trade. There shall be no restrictions on the emergency use of any tools or equipment by any qualified employee or on the use of any tools or equipment for the performance of work within the employee's jurisdiction.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SECTION 3. SUPERVISION

Employees shall work under the supervision of the craft foreperson or general foreperson.

SECTION 4. TRAVEL ALLOWANCES

There shall be no payments for travel expenses, travel time, subsistence allowance or other such reimbursements or special pay except as expressly set forth in this Agreement.

SECTION 5. FULL WORK DAY

Employees shall be at their work area at the starting time established by the Contractor, provided they are provided access to the work area. The signatories reaffirm their policy of a fair day's work for a fair day's wage.

SECTION 6. COOPERATION AND WAIVER

The Construction Manager, Contractors and the Unions will cooperate in seeking any NYS Department of Labor, or any other government, approvals that may be needed for implementation of any terms of this Agreement. In addition, the Council, on their own behalf and on behalf of its participating affiliated Local Unions and their individual members, intend the provisions of this Agreement to control to the greatest extent permitted by law, notwithstanding contrary provisions of any applicable prevailing wage, or other, law and intend this Agreement to constitute a waiver of any such prevailing wage, or other, law to the greatest extent permissible only for work within the scope of this Agreement, including specifically, but not limited to those provisions relating to shift, night, and similar differentials and premiums. This Agreement does not, however,

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

constitute a waiver or modification of the prevailing wage schedules applicable to work not covered by this Agreement.

ARTICLE 18. SAVINGS AND SEPARABILITY

SECTION 1. THIS AGREEMENT

In the event that the application of any provision of this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, or if such application may cause the loss of Program funding or any New York State Labor Law exemption for all or any part of the Program Work, the provision or provisions involved (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the remainder of the Agreement shall remain in full force and effect to the extent allowed by law (and to the extent no funding or exemption is lost), unless the part or parts so found to be in violation of law or to cause such loss are wholly inseparable from the remaining portions of the Agreement and/or are material to the purposes of the Agreement. In the event a court of competent jurisdiction finds any portion of the Agreement to trigger the foregoing, the parties will immediately enter into negotiations concerning the substance affected by such decision for the purpose of achieving conformity with the court determination and the intent of the parties hereto for contracts to be let in the future.

SECTION 2. THE BID SPECIFICATIONS

In the event that the Agency's (or Construction Manager's) bid specifications, or other action, requiring that a successful bidder (and subcontractor) become signatory to this Agreement is enjoined, on either an interlocutory or permanent

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

basis, or is otherwise determined to be in violation of law, or may cause the loss of Program funding or any New York State Labor Law exemption for all or any part of the Program Work, such requirement (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the Agreement shall remain in full force and effect to the extent allowed by law and to the extent no funding or exemption is lost). In such event, the Agreement shall remain in effect for contracts already bid and awarded or in construction only where the Agency and Contractor voluntarily accepts the Agreement. The parties will enter into negotiations as to modifications to the Agreement to reflect the court or other action taken and the intent of the parties for contracts to be let in the future.

SECTION 3. NON-LIABILITY

In the event of an occurrence referenced in Section 1 or Section 2 of this Article, neither the Agency, the Construction Manager, any Contractor, nor any Union shall be liable, directly or indirectly, for any action taken, or not taken, to comply with any court order or injunction, other determination, or in order to maintain funding or a New York State Labor Law exemption for Program Work. Bid specifications will be issued in conformance with court orders then in effect and no retroactive payments or other action will be required if the original court determination is ultimately reversed.

SECTION 4. NON-WAIVER

Nothing in this Article shall be construed as waiving the prohibitions of Article 7 as to signatory Contractors and signatory Unions.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

ARTICLE 19 - FUTURE CHANGES IN SCHEDULE A AREA CONTRACTS

SECTION 1. CHANGES TO AREA CONTRACTS

A. Schedule A to this Agreement shall continue in full force and effect until the Contractor and/or Union parties to the Area Collective Bargaining Agreements that are the basis for the Schedule A notify the Agency and Construction Manager in writing of the changes agreed to in that Area Collective Bargaining which are applicable to work covered by this Agreement and their effective dates.

B. It is agreed that any provisions negotiated into Schedule A collective bargaining agreements will not apply to work under this Agreement if such provisions are less favorable to those uniformly required of contractors for construction work normally covered by those agreements; nor shall any provision be recognized or applied on Program Work if it may be construed to apply exclusively, or predominantly, to work covered by this Agreement.

C. Any disagreement between signatories to this Agreement over the incorporation into Schedule A of provisions agreed upon in the renegotiation of Area Collective Bargaining Agreements shall be resolved in accordance with the procedure set forth in Article 9 of this Agreement.

SECTION 2. LABOR DISPUTES DURING AREA CONTRACT NEGOTIATIONS

The Unions agree that there will be no strikes, work stoppages, sympathy actions, picketing, slowdowns or other disruptive activity or other violations of Article 7 affecting the Program Work by any Local Union involved in the renegotiation of Area

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Local Collective Bargaining Agreements nor shall there be any lock-out on such Program Work affecting a Local Union during the course of such renegotiations.

ARTICLE 20 - WORKERS' COMPENSATION ADR

SECTION 1.

An ADR program may be negotiated and participation in the ADR Program will be optional by trade.

ARTICLE 21 - HELMETS TO HARDHATS

SECTION 1.

The Contractors and the Unions recognize a desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction industry. The Contractors and Unions agree to utilize the services of the New York City Helmets to Hardhats Program to serve as a resource for preliminary orientation, assessment of construction aptitude, referral to apprenticeship programs or hiring halls, counseling and mentoring, support network, employment opportunities and other needs as identified by the parties.

SECTION 2.

The Unions and Contractors agree to coordinate with the Program to create and maintain an integrated database of veterans interested in working on this Project and of

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

apprenticeship and employment opportunities for this Project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

IN WITNESS WHEREOF the parties have caused this Agreement to be executed and
effective as of the ___ day of _____, _____

FOR BUILDING AND CONSTRUCTION TRADES COUNCIL
OF GREATER NEW YORK AND VICINITY

BY: _____
Gary LaBarbera
President

FOR NEW YORK CITY

BY:
Anthony Shorris
First Deputy Mayor

APPROVED AS TO FORM:

ACTING CORPORATION COUNSEL
NEW YORK CITY

NYC AGENCY RENOVATION & REHAB OF CITY OWNED
BUILDINGS/STRUCTURES PLA

LIST OF SIGNATORY UNIONS
Boiler Makers Local No. 5
Carpenters District Council
Cement Masons No. 780
Concrete Workers, District Council No. 16
Derrickmen and Riggers, Local Union No. 197
Drywall Tapers 1974, District Council 9
Electrical Workers Local No. 3
Glaziers Local Union No. 1087 District Council 9
Heat & Frost Insulators, Local Union No. 12A
Heat & Frost Insulators, Local Union No. 12
Iron Workers District Council
Iron Workers Local Union No. 40
Iron Workers Local No. 361
Laborers Local No. 78, Asbestos & Lead Abatement
Laborers Local 1010 Pavers and Road Builders District Council
Laborers 79 Construction and General Building Laborers
Laborers Local No. 731 Excavators
Mason Tenders District Council
Metal Lathers Local No. 46
Metal Polishers District Council 9
Ornamental Iron Workers Local No. 580
Painters District Council 9
Plumbers Local No. 1
Painters, Decorators & Wallcoverers District Council 9
Painters Structural Steel No. 806
Plasterers Local Union No. 262
Roofers & Waterproofers Local 8
Steamfitters Local Union No. 638
Sheet Metal Workers Local No. 28
Sheet Metal Workers Local No. 137
Teamsters Local Union No. 282
Teamsters Local Union 814
Teamsters Local No. 813 Private Sanitation
Tile, Marble & Terrazzo B.A.C. Local Union No. 7
Elevator Constructors Union Local No. 1

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

SCHEDULE "A"

Union	Current Agreement w/
Architectural and Ornamental Iron Workers Local Union 580, AFL-CIO	Allied Building Metal Industries, Inc.
Building, Concrete, Excavating & Common Laborers Local 731	Independent
Building, Concrete, Excavating & Common Laborers Local 731	Members of the General Contractors Association of New York, Inc.
District Council No. 9, I.U.P.A.T Glaziers Local 1087	Window and Plate Glass Dealers Association
Drywall Tapers and Pointers Local 1974, affiliated with International Union of Painters & Allied Trades and Drywall Taping Contractor's Association & Association of Wall-Ceiling & Carpentry Industries NY, Inc.	Independent
Enterprise Association of Steamfitters and Apprentices Local 638	Mechanical Contractors Association of NY, Inc.
Enterprise Association of Steamfitters and Apprentices Local 638	Independent
Highway Road and Street Laborers Local Union 1010 of the District Council of Pavers and Road Builders of the Laborers' International Union of North America AFL-CIO	Independent
Highway Road and Street Laborers Local Union 1010 of the District Council of Pavers and Road Builders of the Laborers' International Union of North America AFL-CIO	Member of the General Contractors Association of New York, Inc.
International Association of Heat and Frost Insulators and Allied Workers Local No. 12 of New York City	Independent
International Association of Heat and Frost Insulators and Allied Workers Local No. 12 of New York City	The Insulation Contractors Association of New York City, Inc.
International Association of Heat and Frost Insulators and Allied Workers Local No. 12A of New York City	Independent

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

International Association of Heat and Frost Insulators and Allied Workers Local No. 12A of New York City	Environmental Contractors Association, Inc.
International Brotherhood of Boilermakers, Iron Ship Builders, Blacksmiths, Forgers and Helpers, AFL-CIO, Local Lodge No. 5	Boilermakers Association of Greater New York
Local Union No. 3 International Brotherhood of Electrical Workers, AFL-CIO	New York Electrical Contractors Association
International Brotherhood of Teamsters, Local 282, High Rise contract	Building Contractors Association & Independents
Local 46 Metallic Lathers Union and Reinforcing Iron Workers of NY and Vicinity of the International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers	Cement League
Local 46 Metallic Lathers Union and Reinforcing Iron Workers of NY and Vicinity of the International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers	Independent
Local 8 Roofers, Waterproofers & Allied Workers	Roofing and Waterproofing Contractors Association of New York and Vicinity
Local Union 1 of the United Association of Journeymen and Apprentices of the Pipe Fitting Industry of the United States and Canada	Association of Contracting Plumbers of the City of New York
Local Union Number 40 & 361 of Bridge, Structural Ornamental and Reinforcing Iron Workers AFL-CIO	Independent
Operative Plasterers' and Cement Masons' International Association Local No. 262	Independent
Painters and Allied Trades AFL-CIO, District Council No. 9 (Painting and Protective Coatings CBA)	Independent

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Painters and Allied Trades AFL-CIO, District Council No. 9 (Painting and Protective Coatings CBA)	The Association of Master Painters & Decorators of NY, Inc. and The Association of Wall, Ceiling & Carpentry Industries of NY, Inc. and The Window and Plate Glass Dealers Association
Sheet Metal Workers' International Association, Local 28	Sheet Metal & Air Conditioning Contractors Association of New York City, Inc.
Sheet Metal Workers' International Association, Local 137	The Greater New York Sign Association
Structural Steel and Bridge Painters Local 806, DC 9 International Union of Painters and Allied Trades, AFL-CIO	New York Structural Steel Painting Contractors Association
Teamsters Local 813	Independent
Teamsters Local 813	IESI NY Corporation
Teamsters Local 814	Greater New York Movers and Warehousemen's Bargaining Group
The Cement Masons' Union, Local 780	Cement League
The District Council of Cement and Concrete Workers (comprised of Local 6A; Local 18A and Local 20)	Cement League
The District Council of Cement and Concrete Workers (comprised of Local 6A; Local 18A and Local 20)	Independent

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Heavy Carpenters	GCA
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Dockbuilders Local No. 1556	Concrete Contractors of NY
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Dockbuilders Local 1556	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Millwright Local 740	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Timbermen Local 1556	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Timbermen Local 1556	GCA
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Heavy Carpenters	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Manufacturing Woodworkers Association of Greater New York Incorporated
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Hoisting Trade Association of New York, Inc.
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Test Boring Association

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	Building Contractors Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Association of Wall-Ceiling & Carpentry Industries of New York, Incorporated
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners	The Cement League
The District Council of NYC and Vicinity of the United Brotherhood of Carpenters and Joiners of America	New York City Millwright Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners	Greater New York Floor Covering Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Association of Architectural Metal & Glass
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Concrete Contractors of NY
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Building Construction Carpenters	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Local 2287	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Shop Carpenters	Independent
The Tile Setters and Tile Finishers Union of New York and New Jersey, Local 7 of the International Bricklayers and Allied Craftworkers	The Greater New York and New Jersey Contractors Association

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

United Derrickmen & Riggers Association, Local 197 of NY, LI, Westchester & Vicinity	Contracting Stonesetters Association Inc.
United Derrickmen & Riggers Association L 197 of NY, LI, Westchester and Vicinity	Building Stone and Pre-cast Contractors Association
International Union of Operating Engineers Local 14-14B	Building Contractors Association
International Union of Operating Engineers Local 14-14B	Contractors Association of Greater NY
International Union of Operating Engineers Local 14-14B	GCA
International Union of Operating Engineers Local 14-14B	The Cement League
International Union of Operating Engineers Local 14-14B	Allied Building Metal Industries, Inc.
International Union of Operating Engineers Local 14-14B	Brick Association
International Union of Operating Engineers Local 14-14B	Independent
International Union of Operating Engineers Local 15	Allied Building Metal Industries, Inc.
International Union of Operating Engineers Local 15-15A	General Contractors Association
International Union of Operating Engineers Local 15D	General Contractors Association
International Union of Operating Engineers Local 15D	Structural Steel Erectors

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

International Union of Operating Engineers Local 15-15A	Building Contractors Association
International Union of Operating Engineers Local 15D	Building Contractors Association
International Union of Operating Engineers Local 15-15A	Contractors Association of Greater NY
International Union of Operating Engineers Local 15D	Contractors Association of Greater NY
International Union of Operating Engineers Local 15-15A	The Cement League
International Union of Operating Engineers Local 15D	The Cement League

NYC AGENCY RENOVATION & REHAB OF CITY OWNED
BUILDINGS/STRUCTURES PLA

ADDITIONAL PARTICIPATING UNIONS

Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers

ADDITIONAL PARTICIPATING UNION SCHEDULE A

Union	Current Agreement with:
Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Independent
Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Associated Brick Masons Contractors
Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Building Restoration Contractors Association
Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Building Contractors Association
The Stone Setters of Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Independent
The Plasterers of Local No. 1 New York of the International Union of Bricklayers and Allied Craft Workers	Independent

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Project Labor Agreement - - Letter of Assent

Dear:

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as _____ and located at _____ (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto:
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Project Labor Agreement - - Letter of Assent

Dear:

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as ~~Two Bronx Branch Libraries~~ located at * _____ (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto;
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:


* Francis Martin Branch Library, 2150 University Branch Library, Bronx, NY 10453
Clason's Point Branch Library, 1215 Morrison Avenue, Bronx, NY 10472
Replacement of HVAC & BMS, Project No. LNXEA08BX

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Dated: January 16, 2018

C.D.E. Air Conditioning Co., Inc.
(Name of Contractor or subcontractor)


C.D.E. Air Conditioning Co., Inc.
(Name of CM; GC; Contractor or
Higher Level Subcontractor)


(Authorized Officer & Title) Joseph F. Azara, Jr.
President
321 39th Street
Brooklyn, New York 11232
(Address)

718-788-1040 / 718-788-2046
(Phone) (Fax)

Contractor's State License
N/A

Sworn to before me this
16th day of January, 2018


Notary Public

ROBERT J. AYOUB
NOTARY PUBLIC, STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

Dated: _____

(Name of Contractor or subcontractor)

(Name of CM; GC; Contractor or
Higher Level Subcontractor)

(Authorized Officer & Title)

(Address)

(Phone) (Fax)

Contractor's State License

Sworn to before me this
____ day of _____,

Notary Public

NYC AGENCY RENOVATION & REHAB CITY OWNED
BUILDINGS/STRUCTURES PLA

**NEW YORK CITY BUILDING AND CONSTRUCTION TRADES COUNCIL
STANDARDS OF EXCELLENCE**

The purpose of this Standard of Excellence is to reinforce the pride of every construction worker and the commitment to be the most skilled, most productive and safest workforce available to construction employers and users in the City of New York. It is the commitment of every affiliated local union to use our training and skills to produce the highest quality work and to exercise safe and productive work practices.

The rank and file members represented by the affiliated local unions acknowledge and adopt the following standards:

- *Provide a full days work for a full days pay;*
- *Safely work towards the timely completion of the job;*
- *Arrive to work on time and work until the contractual quitting time;*
- *Adhere to contractual lunch and break times;*
- *Promote a drug and alcohol free work site;*
- *Work in accordance with all applicable safety rules and procedures;*
- *Allow union representatives to handle job site disputes and grievances without resort to slowdowns, or unlawful job disruptions;*
- *Respect management directives that are safe, reasonable and legitimate;*
- *Respect the rights of co-workers;*
- *Respect the property rights of the owner, management and contractors.*

The Unions affiliated with the New York City Building and Construction Trades Council will expect the signatory contractors to safely and efficiently manage their jobs and the unions see this as a corresponding obligation of the contractors under this Standard of Excellence. The affiliated unions will expect the following from its signatory contractors:

- *Management adherence to the collective bargaining agreements;*
- *Communication and cooperation with the trade foremen and stewards;*
- *Efficient, safe and sanitary management of the job site;*
- *Efficient job scheduling to mitigate and minimize unproductive time;*
- *Efficient and adequate staffing by properly trained employees by trade;*
- *Efficient delivery schedules and availability of equipment and tools to ensure efficient job progress;*
- *Ensure proper blueprints, specifications and layout instructions and material are available in a timely manner*
- *Promote job site dispute resolution and leadership skills to mitigate such disputes;*
- *Treatment of all employees in a respectful and dignified manner acknowledging their contributions to a successful project.*

The affiliated unions and their signatory contractors shall ensure that both the rank and file members and the management staff shall be properly trained in the obligations undertaken in the Standard of Excellence.

NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES PLA



Codes of Conduct

BuildSafeNYC establishes that all BTEA member companies and BCTC member unions establish minimum safety standards on all building construction projects in NYC as follows:

1. The workforce shall adhere to the minimum personal protective equipment (PPE) usage to include:
 - a. ANSI compliant Hard Hats (with ratchet suspension) at all times (supplied by employer)
 - b. Construction-type Work Boots at all times
 - c. Long Pants and shirts with at least short sleeves at all times (no shorts or tank tops)
 - d. ANSI compliant Eye Protection in their possession and used as needed (supplied by employer)
 - e. Adequate Hearing Protection in their possession and used as needed (supplied by employer)
 - f. High-vis traffic vests at street level and when around heavy equipment (supplied by employer)
2. CM and Subcontractor management shall implement a fair and consistent disciplinary policy for all site personnel regarding the adherence to site safety rules and requirements. Likewise, a joint labor / management team will periodically assess project wide implementation of these Codes.
3. CM firms shall maintain minimum standards for workforce restroom, hygiene facilities and housekeeping, initially and throughout the duration of the project.
4. All personnel shall adhere to a strict policy against drug and alcohol possession and use on sites and during hours of work.
5. All personnel shall attend a site safety orientation prior to beginning work. Worker certifications of safety training for specific tasks such as fire watch, flagman, and safety attendant must be verified.
6. No cell phones, portable media devices, radios or other devices that limit hearing and attention shall be used while working on sites.
7. Ground Fault Circuit Interrupters (GFCI) will be used on all power tools and extension cords.
8. Union trade representatives shall participate in a regularly scheduled site safety meeting on all projects regardless of size.
9. Extreme effort shall be made to isolate the public from all construction activity. Specifically, systems shall be put in place to control falling materials and pedestrian exposure. This should be a top priority for the entire project workforce.
10. Workers shall honor security access control systems to establish entry to sites by authorized personnel only, where applicable.
11. Fall protection management shall be a top project priority. Workers shall maintain and use necessary fall protection systems and procedures where appropriate. Engineering controls and work methods which eliminate, guard, or otherwise control fall hazards shall take priority over personal fall arrest system usage.
12. Where hazardous materials are present, projects shall implement efforts to communicate and control potential exposure to the workforce.

With Full Support and Endorsement of:

Joseph Colletti
 Louis J. Colletti, President & CEO
 Building Trades Employers Association
BTEANYC
 The Voice of
 Building Trades Employers Association

Edward J. Malloy
 Edward J. Malloy, President
 Building and Construction Trades Council



<p><i>James Abadio</i> Chief Architect Flatiron Construction H&M Construction</p>	<p><i>Robert A. Delapelle</i> Turner Construction Gehlert Construction</p>	<p><i>Blanca USA Building</i> Structure</p>	<p><i>David M. ...</i> Tolman CAULSWELL NAVIGATE</p>
Construction Management Firms			
<p><i>Michael W. Connelly</i> Local No. 5 Local No. 25 Local No. 26 Local No. 27 Local No. 28 Local No. 29 Local No. 30 Local No. 31 Local No. 32 Local No. 33 Local No. 34 Local No. 35 Local No. 36 Local No. 37 Local No. 38 Local No. 39 Local No. 40 Local No. 41 Local No. 42 Local No. 43 Local No. 44 Local No. 45 Local No. 46 Local No. 47 Local No. 48 Local No. 49 Local No. 50</p>	<p><i>James ...</i> Local No. 51 Local No. 52 Local No. 53 Local No. 54 Local No. 55 Local No. 56 Local No. 57 Local No. 58 Local No. 59 Local No. 60 Local No. 61 Local No. 62 Local No. 63 Local No. 64 Local No. 65 Local No. 66 Local No. 67 Local No. 68 Local No. 69 Local No. 70 Local No. 71 Local No. 72 Local No. 73 Local No. 74 Local No. 75 Local No. 76 Local No. 77 Local No. 78 Local No. 79 Local No. 80</p>	<p><i>Trade Unions</i> Local No. 81 Local No. 82 Local No. 83 Local No. 84 Local No. 85 Local No. 86 Local No. 87 Local No. 88 Local No. 89 Local No. 90 Local No. 91 Local No. 92 Local No. 93 Local No. 94 Local No. 95 Local No. 96 Local No. 97 Local No. 98 Local No. 99 Local No. 100</p>	<p><i>Local No. 101</i> Local No. 102 Local No. 103 Local No. 104 Local No. 105 Local No. 106 Local No. 107 Local No. 108 Local No. 109 Local No. 110 Local No. 111 Local No. 112 Local No. 113 Local No. 114 Local No. 115 Local No. 116 Local No. 117 Local No. 118 Local No. 119 Local No. 120</p>

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
DEPARTMENT OF
DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

INFORMATION FOR BIDDERS

December 2013

THIS PAGE INTENTIONALLY LEFT BLANK

INFORMATION FOR BIDDERS

1. Description and Location of Work

The description and location of the work for which bids are requested are specified in Attachment 1, "Bid Information". Attachment 1 is included in the Bid Booklet.

2. Time and Place for Receipt of Bids

Sealed bids shall be received on or before the date and hour specified in Attachment 1, at which time they will be publicly opened and read aloud in the presence of the Commissioner or his or her representative, and any bidders who may desire to be present.

3. Definitions

The definitions set forth in the Procurement Policy Board Rules shall apply to this Invitation For Bids.

4. Invitation For Bids and Contract Documents

(A) Except for titles, sub-titles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience) the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of the Contract and the Invitation for Bids.

- (1) All provisions required by law to be inserted in this Contract, whether actually inserted or not
- (2) The Contract Drawings and Specifications
- (3) The General Conditions, the General Requirements and the Special Conditions, if any
- (4) The Contract
- (5) The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet
- (6) The Budget Director's Certificate; all Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed with the Work.

(B) For particulars as to this procurement, including quantity and quality of the purchase, extent of the work or labor to be performed, delivery and performance schedule, and any other special instructions, prospective bidders are referred to the Invitation For Bids Documents. A copy of such documents can be obtained at the location set forth in Attachment 1.

(C) Deposit for Copy of Invitation For Bids Documents: Prospective bidders may obtain a copy of the Invitation For Bids Documents by complying with the conditions set forth in the Notice of Solicitation. The deposit must be in the form of a check or money order made payable to the City of New York, and drawn upon a state or national bank or trust company, or a check of such bank or trust company signed by a duly authorized officer thereof.

(D) Return of Invitation For Bids Documents: All Invitation For Bids Documents must be returned to the Department upon request. If the bidder elects not to submit a bid thereunder, the Invitation For Bids Documents shall be returned to the Department, along with a statement that no bid will be submitted.

(E) Return of Deposit: Such deposit will be returned within 30 days after the award of the contract or the rejection of all bids as set forth in the advertisement, provided the Invitation For Bids Documents are returned to the location specified in Attachment 1, in physical condition satisfactory to the Commissioner.

(F) Additional Copies: Additional copies of the Invitation For Bids Documents may be obtained, subject to the conditions set forth in the advertisement for bids.

5. Pre-Bid Conference

A pre-bid conference shall be held as set forth in Attachment 1. Nothing stated at the pre-bid conference shall change the terms or conditions of the Invitation For Bids Documents, unless a change is made by written amendment as provided in Section 9 below. Failure to attend a mandatory pre-bid conference shall constitute grounds for the rejection of the bid.

6. Agency Contact

Any questions or correspondence relating to this bid solicitation shall be addressed to the Agency Contact person specified in Attachment 1.

7. Bidder's Oath

(A) The bid shall be properly signed by an authorized representative of the bidder and the bid shall be verified by the written oath of the authorized representative who signed the bid, that the several matters stated and information furnished therein are in all aspects true.

(B) A materially false statement willfully or fraudulently made in connection with the bid or any of the forms completed and submitted with the bid may result in the termination of any Contract between the City and the Bidder. As a result, the Bidder may be barred from participating in future City contracts as well as be subject to possible criminal prosecution.

8. Examination and Viewing of Site, Consideration of Other Sources of Information and Changed Conditions

(A) Pre-Bidding (Investigation) Viewing of Site - Bidders must carefully view and examine the site of the proposed work, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions on, about or above the site relating to or affecting in any way the performance of the work to be done under the Contract which were or should have been indicated to a reasonably prudent bidder. To arrange a date for visiting the work site, bidders are to contact the Agency Contact person specified in Attachment 1.

(B) Should the contractor encounter during the progress of the work subsurface conditions at the site materially differing from any shown on the Contract Drawings or indicated in the Specifications or such subsurface conditions as could not reasonably have been anticipated by the contractor and were not anticipated by the City, which conditions will materially affect the cost of the work to be done under the Contract, the attention of the Commissioner must be called immediately to such conditions before they are disturbed. The Commissioner shall thereupon promptly investigate the conditions. If he finds that they do so materially differ, or that they could not reasonably have been anticipated by the contractor and were not anticipated by the City, the Contract may be modified with his written approval.

9. Examination of Proposed Contract

(A) Request for Interpretation or Correction: Prospective bidders must examine the Contract Documents carefully and before bidding must request the Commissioner in writing for an interpretation or correction of every patent ambiguity, inconsistency or error therein which should have been discovered by a reasonably prudent bidder. Such interpretation or correction, as well as any additional contract provisions the Commissioner may decide to include, will be issued in writing by the Commissioner as an addendum to the Contract, which will be transmitted to each person recorded as having received a copy of the Contract Documents from the Department. Transmission of such addendum will be by mail, e-mail, facsimile or hand delivery. Such addendum will also be posted at the place where the Contract Documents are available for the inspection of prospective bidders. Upon transmission as provided for herein, such addendum shall become a part of the Contract Documents, and binding on all bidders, whether or not actual notice of such addendum is shown.

(B) Only Commissioner's Interpretation or Correction Binding: Only the written interpretation or correction so given by the Commissioner shall be binding, and prospective bidders are warned that no other officer, agent or employee of the City is authorized to give information concerning, or to explain or interpret, the Contract.

(C) Documents given to a subcontractor for the purpose of soliciting the subcontractor's bid shall include either a copy of the bid cover sheet or a separate information sheet setting forth the project name, the Contract number (if available), the contracting agency and the Project's location.

10. Form of Bid

Each bid must be submitted upon the prescribed form and must contain: a) the name, residence and place of business of the person or persons making the same; b) the names of all persons interested therein, and if no other person is so interested, such fact must be distinctly stated; c) a statement to the effect that it is made without any connection with any other person making a bid for the same purpose and that it is in all respects fair and without collusion or fraud; d) a statement that no Council member or other officer or employee or person whose salary is payable in whole or part from the City Treasury is directly or indirectly interested therein or in the supplies, materials or equipment and work or labor to which it relates, or in any portion of the profits thereof; e) a statement that the bidder is not in arrears to the City or to any agency upon a debt or contract or taxes, and is not a defaulter as surety or otherwise upon any obligation to the City to any agency thereof, except as set forth in the bid.

THE BID SHALL BE TYPEWRITTEN OR WRITTEN LEGIBLY IN INK. THE BID SHALL BE SIGNED IN INK. ERASURES OR ALTERATIONS SHALL BE INITIALED BY THE SIGNER IN INK. FAILURE TO CONFORM TO THE REQUIREMENTS OF THIS SECTION 10 SHALL RESULT IN THE REJECTION OF THE BID.

11. Irrevocability of Bid

The prices set forth in the bid cannot be revoked and shall be effective until the award of the Contract, unless the bid is withdrawn as provided for in Sections 15 and 18 below.

12. Acknowledgment of Amendments

The receipt of any amendment to the Contract Documents shall be acknowledged by the bidder in its bid submission.

13. Bid Samples and Descriptive Literature

Bid samples and descriptive literature shall not be submitted by the bidder, unless expressly requested elsewhere in the Contract or Contract Documents. Any unsolicited bid samples or descriptive literature which are submitted shall not be examined or tested and shall not be deemed to vary any of the provisions of this Contract.

14. Proprietary Information/Trade Secrets

(A) The bidder shall identify those portions of the bid which it deems to be confidential, proprietary information or trade secrets, and provide justification why such materials shall not be disclosed by the City. All such materials shall be clearly indicated by stamping the pages on which such information appears, at the top and bottom thereof with the word "Confidential". Such materials stamped "Confidential" must be easily separable from the non-confidential sections of the bid.

(B) All such materials so indicated shall be reviewed by the Agency and any decision not to honor a request for confidentiality shall be communicated in writing to the bidder. For those bids which are unsuccessful, all such confidential materials shall be returned to the bidder. Prices, makes and model or catalog numbers of the items offered, deliveries, and terms of payment shall be publicly available after bid opening, regardless of any designation of confidentiality made by the bidder.

15. Pre-Opening Modification or Withdrawal of Bids

Bids may be modified or withdrawn by written notice received in the office designated in Attachment 1, before the time and date set for the bid opening. If a bid is withdrawn in accordance with this Section, the bid security, if any, shall be returned to the bidder.

16. Bid Evaluation and Award

In accordance with the New York City Charter, the Procurement Policy Board Rules and the terms and conditions of this Invitation For Bids, this Contract shall be awarded, if at all, to the responsible bidder whose bid meets the requirements and evaluation criteria set forth in the Invitation For Bids, and whose bid price is either the most favorable bid price or, if the Invitation For Bids so states, the most favorable evaluated bid price. A bid may not be evaluated for any requirement or criterion that is not disclosed in the Invitation For Bids.

Restriction: No negotiations with any bidder shall be allowed to take place except under the circumstances and in the manner set forth in Section 21. Nothing in this Section shall be deemed to permit a contract award to a bidder submitting a higher quality item than that designated in the Invitation For Bids, if that bid is not also the most favorable bid.

17. Late Bids, Late Withdrawals and Late Modifications

Any bid received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. Any request for withdrawal or modification received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. The exception to this provision is that a late modification of a successful bid that makes the bid terms more favorable to the City shall be considered at any time it is received.

18. Withdrawal of Bids.

Except as provided for in Section 15, above, a bidder may not withdraw its bid before the expiration of forty-five (45) days after the date of the opening of bids; thereafter, a bidder may withdraw its bid only in writing and in advance of an actual award. If within sixty (60) days after the execution of the Contract, the Commissioner fails to fix the date for commencement of work by written notice to the bidder, the bidder, at his option, may ask to be relieved of his obligation to perform the work called for by written notice to the Commissioner. If such notice is given to the Commissioner, and the request to withdraw is granted, the bidder waives all claims in connection with this Contract.

19. Mistake in Bids

(A) Mistake Discovered Before Bid Opening: A bidder may correct mistakes discovered before the time and date set for bid opening by withdrawing or correcting the bid as provided in Section 15 above.

(B) Mistakes Discovered Before Award

(1) In accordance with General Municipal Law (Section 103, subdivision 11), where a unilateral error or mistake is discovered in a bid, such bid may be withdrawn upon written approval of the Agency Chief Contracting Officer if the following conditions are met:

- (a) The mistake is known or made known to the agency prior to the awarding of the Contract or within 3 days after the opening of the bid, whichever period is shorter; and
- (b) The price bid was based upon an error of such magnitude that enforcement would be unconscionable; and

- (c) The bid was submitted in good faith and the bidder submits credible evidence that the mistake was a clerical error as opposed to a judgment error; and
- (d) The error in the bid is actually due to an unintentional and substantial arithmetic error or an unintentional omission of a substantial quantity of work, labor, material or services made directly in the compilation of the bid, which unintentional arithmetic error or unintentional omission can be clearly shown by objective evidence drawn from inspection of the original work paper, documents, or materials used in the preparation of the bid sought to be withdrawn; and
- (e) It is possible to place the agency in the same position as existed prior to the bid.

(2) Unless otherwise required by law, the sole remedy for a bid mistake in accordance with this Article shall be withdrawal of the bid, and the return of the bid bond or other security, if any, to the bidder. Thereafter, the agency may, in its discretion, award the Contract to the next lowest bidder or rebid the Contract. Any amendment to or reformation of a bid or a Contract to rectify such an error or mistake therein is strictly prohibited.

(3) If the mistake and the intended correct bid are clearly evident on the face of the bid document, the bid shall be corrected to the intended correct bid and may not be withdrawn. Examples of mistakes that may be corrected are typographical errors, errors in extending unit prices, transposition errors and arithmetical errors.

20. Low Tie Bids

(A) When two or more low responsive bids from responsible bidders are identical in price, meeting all the requirements and criteria set forth in the Invitation For Bids, the Agency Chief Contracting Officer will break the tie in the following manner and order of priority:

- (1) Award to a certified New York City small, minority or woman-owned business entity bidder;
- (2) Award to a New York City bidder;
- (3) Award to a certified New York State small, minority or woman-owned business bidder;
- (4) Award to a New York State bidder.

(B) If two or more bidders still remain equally eligible after application of paragraph (A) above, award shall be made by a drawing by lot limited to those bidders. The bidders involved shall be invited to attend the drawing. A witness shall be present to verify the drawing and shall certify the results on the bid tabulation sheet.

21. Rejection of Bids

(A) Rejection of Individual Bids: The Agency may reject a bid if:

- (1) The bidder fails to furnish any of the information required pursuant to Section 24 or 28 hereof; or if
- (2) The bidder is determined to be not responsible pursuant to the Procurement Policy Board Rules; or if
- (3) The bid is determined to be non-responsive pursuant to the Procurement Policy Board Rules; or if
- (4) The bid, in the opinion of the Agency Chief Contracting Officer, contains unbalanced bid prices and is thus non-responsive, unless the bidder can show that the prices are not unbalanced for the probable required quantity of items, or if the imbalance is corrected pursuant to Section 15.

(B) Rejection of All Bids: The Agency, upon written approval by the Agency Chief Contracting Officer, may reject all bids and may elect to resolicit bids if in its sole opinion it shall deem it in the best interest of the City so to do.

(C) Rejection of All Bids and Negotiation With All Responsible Bidders: The Agency Head may determine that it is appropriate to cancel the Invitation For Bids after bid opening and before award and to complete the acquisition by negotiation. This determination shall be based on one of the following reasons:

- (1) All otherwise acceptable bids received are at unreasonable prices, or only one bid is received and the Agency Chief Contracting Officer cannot determine the reasonableness of the bid price, or no responsive bid has been received from a responsible bidder; or
- (2) In the judgment of the Agency Chief Contracting Officer, the bids were not independently arrived at in open competition, were collusive, or were submitted in bad faith.

(D) When the Agency has determined that the Invitation for Bids is to be canceled and that use of negotiation is appropriate to complete the acquisition, the contracting officer may negotiate and award the Contract without issuing a new solicitation, subject to the following conditions:

- (1) prior notice of the intention to negotiate and a reasonable opportunity to negotiate have been given by the contracting officer to each responsible bidder that submitted a bid in response to the Invitation for Bids;
- (2) the negotiated price is the lowest negotiated price offered by a responsible bidder; and
- (3) the negotiated price is lower than the lowest rejected bid price of a responsible bidder that submitted a bid in response to the Invitation for Bids.

22. Right to Appeal Determinations of Non-Responsiveness or Non-Responsibility and Right to Protest Solicitations and Award

The bidder has the right to appeal a determination of non-responsiveness or non-responsibility and has the right to protest a solicitation and award. For further information concerning these rights, the bidder is directed to the Procurement Policy Board Rules.

23. Affirmative Action and Equal Employment Opportunity

This Invitation For Bids is subject to applicable provisions of Federal, State and Local Laws and executive orders requiring affirmative action and equal employment opportunity.

24. VENDEX Questionnaires

(A) Requirement: Pursuant to Administrative Code Section 6-116.2 and the PPB Rules, bidders may be obligated to complete and submit VENDEX Questionnaires. Generally, if this bid is \$100,000 or more, or if this bid when added to the sum total of all contracts, concessions and franchises the bidder has received from the City and any subcontracts received from City contractors over the past twelve months, equals or exceeds \$100,000, Vendex Questionnaires must be completed. If required, Vendex Questionnaires must be completed and submitted before any award of contract may be made or before approval is given for a proposed subcontractor. Non-compliance with these submission requirements may result in the disqualification of the bid, disapproval of a subcontractor, subsequent withdrawal of approval for the use of an approved subcontractor, or the cancellation of the contract after its award.

(B) Submission: Vendex Questionnaires must be submitted directly to the Mayor's Office of Contract Services, ATTN: Vendex, 253 Broadway, 9th Floor, New York, New York 10007. In addition, the bidder must submit a Confirmation of Vendex Compliance to the agency. A form for this confirmation is set forth in the Bid Booklet.

(C) Obtaining Forms: Vendex Questionnaires, as well as detailed instructions, may be obtained at www.nyc.gov/vendex. The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.

25. Complaints About the Bid Process

The New York City Comptroller is charged with the audit of contracts in New York City. Any vendor who believes that there has been unfairness, favoritism or impropriety in the bid process should inform the Comptroller, Office of Contract Administration, One Centre Street, Room 835, New York, New York; telephone number (212)669-2797.

26. Bid, Performance and Payment Security

(A) Bid Security: Each bid must be accompanied by bid security in an amount and type specified in Attachment 1. The bid security shall assure the City of New York of the adherence of the bidder to its proposal, the execution of the Contract, and the furnishing of Performance and Payment Bonds by the bidder, if required in Attachment 1. Bid security shall be returned to the bidder as follows:

- (1) Within ten (10) days after the bid opening, the Comptroller will be notified to return the deposits of all but the three (3) lowest bidders. Within five (5) days after the award, the Comptroller will be notified to return the deposits of the remaining two unsuccessful bidders.
- (2) Within five (5) days after the execution of the Contract and acceptance of the Contractor's bonds, the Comptroller will be notified to return the bid security of the successful bidder or, if performance and payment bonds are not required, only after the sum retained under Article 21 of the Contract equals the amount of the bid security.
- (3) Where all bids are rejected, the Comptroller will be notified to return the deposit of the three (3) lowest bidders at the time of rejection.

(B) Performance and Payment Security: Performance and Payment Security must be provided in an amount and type specified in Attachment 1. The performance and payment security shall be delivered by the contractor prior to or at the time of execution of the Contract. If a contractor fails to deliver the required performance and payment security, its bid security shall be enforced, and an award of Contract may be made to the next lowest responsible and responsive bidder, or the contract may be rebid.

(C) Acceptable Types of Security: Acceptable types of security for bids, performance, and payment shall be limited to the following:

- (1) a one-time bond in a form satisfactory to the City;
- (2) a bank certified check or money order;
- (3) obligations of the City of New York; or
- (4) other financial instruments as determined by the Office of Construction in consultation with the Comptroller.

Whenever the successful bidder deposits obligations of the City of New York as performance and payment security, the Comptroller may sell and use the proceeds thereof for any purpose for which the principal or surety on such bond would be liable under the terms of the Contract. If the money is deposited with the Comptroller, the successful bidder shall not be entitled to receive interest on such money from the City.

(D) Form of Bonds: Security provided in the form of bonds must be prepared on the form of bonds authorized by the City of New York. Forms for bid, performance, and payment bonds are included in the Invitation for Bids Documents. Such bonds must have as surety thereunder such surety company or companies as are: (1) approved by the City of New York; (2) authorized to do business in the State of New York, and (3) approved by the Department of the Treasury of the United States. Premiums for any required bonds must be included in the base bid.

The bidder is advised that submission of a bid bond where the surety on such bond fails to meet the criteria set forth herein, shall result in the rejection of the bid as non-responsive.

The Department of the Treasury of the United States advises that information concerning approved surety companies may be obtained as follows: (1) from the Government Printing Office at 202-512-1800; (2) through the Internet at <http://www.fms.treas.gov/c570/index.html>, and (3) through a computerized public bulletin board, which can be accessed by using your computer modem and dialing 202-874-6887.

(E) Power of Attorney: Attorneys in fact who sign bid, performance, or payment bonds must file with each bond a certified copy of their power of attorney to sign said bonds.

27. Failure to Execute Contract

In the event of failure of the successful bidder to execute the Contract and furnish the required security within ten (10) days after notice of the award of the Contract, the deposit of the successful bidder or so much thereof as shall be applicable to the amount of the award made shall be retained by the City, and the successful bidder shall be liable for and hereby agrees to pay on demand the difference between the price bid and the price for which such Contract shall be subsequently awarded, including the cost of any required reletting and less the amount of such deposit. No plea of mistake in such accepted bid shall be available to the bidder for the recovery of the deposit or as a defense to any action based upon such accepted bid. Further, should the bidder's failure to comply with this Section cause any funding agency, body or group (Federal, State, City, Public, Private, etc.) to terminate, cancel or reduce the funding on this project, the bidder in such event shall be liable also to the City for the amount of actual funding withdrawn by such agency on this project, less the amount of the forfeited deposit.

28. Bidder Responsibilities and Qualifications

(A) Bidders must include with their bids all information necessary for a determination of bidder responsibility, as set forth in the Specifications.

(B) The Agency may require any bidder or prospective bidder to furnish all books of account, records, vouchers, statements or other information concerning the bidder's financial status for examination as may be required by the Agency to ascertain the bidder's responsibility and capability to perform the Contract. If required, a bidder must also submit a sworn statement setting forth such information as the Agency may require concerning present and proposed plant and equipment, the personnel and qualifications of his working organizations, prior experience and performance record.

(C) Oral Examination on Qualifications: In addition thereto, and when directed by the Agency, the bidder, or a responsible officer, agent or employee of the bidder, must submit to an oral examination to be conducted by the Agency in relation to his proposed tentative plan and schedule of operations, and such other matters as the Agency may deem necessary in order to determine the bidder's ability and responsibility to perform the work in accordance with the Contract. Each person so examined must sign and verify a stenographic transcript of such examination noting thereon such corrections as such person may desire to make.

(D) If the bidder fails or refuses to supply any of the documents or information set forth in paragraph (B) hereof or fails to comply with any of the requirements thereof, the Agency may reject the bid.

29. Employment Report

In accordance with Executive Order No. 50 (1980) as modified by Executive Order 108 (1986), the filing of a completed Employment Report (ER) is a requirement of doing business with the City of New York for construction contractors with contracts of \$1,000,000 or more and subcontractors with construction subcontracts of \$750,000 or more. The required forms and information are included in the Bid Booklet.

30. Labor Law Requirements

(A) General: The successful bidder will be required to comply strictly with all Federal, State and local labor laws and regulations.

(B) New York State Labor Law: This Contract is subject to New York State Labor Law Section 220, which requires that construction workers on the site be paid prevailing wages and supplements. The Contractor is reminded that all wage provisions of this Contract will be enforced strictly and failure to comply will be considered when evaluating performance. Noncompliance may result in the contractor being debarred by the City from future contracts. Complaints filed with the Comptroller may result in decisions which may debar a contractor from bidding contracts with any state governmental entity and other political subdivisions.

(C) Records: The Contractor is expected to submit accurate payroll reports and other required documents and verify attendance and job classifications being utilized in compliance with the law, Contract provisions and agency procedures.

31. Insurance

(A) Bidders are advised that the insurance requirements contained herein are regarded as material terms of the Contract. As required by Article 22 of the Contract, the contractor must effect and maintain with companies licensed and authorized to do business in the State of New York, the types of insurance set forth therein, when required by and in the amounts set forth in Schedule A of the General Conditions. Such required insurance must be provided from the date the contractor is ordered to commence work and up to the date of final acceptance of all required work.

(B) The contractor must, within ten days of receipt of the notice of award, submit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A of the General Conditions, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by Section 57 of the New York State Workers' Compensation Law and Section 220 of the Disability Benefits Law.

32. Lump Sum Contracts

(A) Comparison of Bids: Bids on Lump Sum Contracts will be compared on the basis of the lump sum price bid, adjusted for alternate prices bid, if any.

(B) Lump Sum Bids for "General Construction Work" which include excavation shall include all necessary excavation work defined in the Specifications as being included in the lump sum bid. The bidder shall also bid a unit price for the additional cost of excavating material which is defined in the Specifications as excavation for which additional payment will be made. The total estimated additional cost of removing such material will be taken as the quantity set forth in the Engineer's Estimate multiplied by the unit price bid. This total estimated cost of additional excavation shall be added to the lump sum bid for the General Construction Work for the purpose of comparing bids to determine the low bidder.

(C) Variations from Engineer's Estimate: The Engineer's Estimate of the quantity of excavation for which additional payment will be made is approximate only and is given solely to be used as a uniform basis for the comparison of bids and such estimate is not to be considered as part of this contract. The quantities actually required to complete the contract work may be more or less than the quantities in the Engineer's Estimate and, if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

33. Unit Price Contracts

(A) Comparison of Bids: Bids on Unit Price Contracts will be compared on the basis of a total estimated price, arrived at by taking the sum of the estimated quantities of such items, in accordance with the Engineer's Estimate of Quantities set forth in the Bid Form, multiplied by the corresponding unit prices, and including any lump sum bids on individual items.

(B) Variations from Engineer's Estimate: Bidders are warned that the Engineer's Estimate of Quantities on the various items of work and materials is approximate only, given solely to be used as a uniform basis for the comparison of bids, and is not be considered part of this contract. The quantities actually required to complete the contract work may be less or more than so estimated, and if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

(C) Overruns: The terms and conditions applicable to overruns of unit price items are set forth in Article 26 of the Contract.

34. Excise Tax

Bidders are referred to the Specifications for information on Federal Excise Tax exemptions.

35. Licenses and Permits

The successful bidder will be required to obtain all necessary licenses and permits necessary to perform the work.

36. Multiple Prime Contractors

If more than one prime contractor will be involved on this project, all contractors are required to examine the Invitation for Bid packages for all other parts of the project.

37. Locally Based Enterprise Requirements (LBE)

This Contract is subject to the requirements of Administrative Code, Section 6-108.1, and the regulations promulgated thereunder. No construction contract will be awarded unless and until these requirements have been complied with in their entirety. The bidder is advised of the provisions set forth below, as well as the provisions with respect to the Locally Based Enterprise Program contained in Article 67 of the Contract. The contractor is advised that:

(A) If any portion of the Contract is subcontracted, not less than ten percent of the total dollar amount of the contract shall be awarded to locally based enterprises ("LBEs"); except, where less than ten percent of the total dollar amount of the Contract is subcontracted, such lesser percentage shall be so awarded.

(B) No contractor shall require performance and payment bonds from LBE subcontractors.

(C) No Contract shall be awarded unless the contractor first identifies in its bid:

- (1) the percentage, dollar amount and type of work to be subcontracted; and
- (2) the percentage, dollar amount and type of work to be subcontracted to LBEs.

(D) Within ten calendar days after notification of low bid, the apparent low bidder shall submit an "LBE Participation Schedule" to the contracting agency. If such schedule does not identify sufficient LBE subcontractors to meet the requirements of Administrative Code Section 6-108.1, the apparent low bidder shall submit documentation of its good faith efforts to meet such requirements.

(1) The "LBE Participation Schedule" shall include:

- (a) the name and address of each LBE that will be given a subcontract,
- (b) the percentage, dollar amount and type of work to be subcontracted to the LBE, and
- (c) the dates when the LBE subcontract work will commence and end.

- (2) The following documents shall be attached to the "LBE Participation Schedule":
- (a) verification letters from each subcontractor listed in the "LBE Participation Schedule" stating that the LBE will enter into a formal agreement for work,
 - (b) certification documents of any proposed LBE subcontractor which is not on the LBE certified list, and
 - (c) copies of the certification letter of any proposed subcontractor which is an LBE.
- (3) Documentation of good faith efforts to achieve the required LBE percentage shall include as appropriate but not limited to the following:
- (a) attendance at prebid meetings, when scheduled by the agency, to advise bidders of contract requirements;
 - (b) advertisement where appropriate in general circulation media, trade association publications and small business media of the specific subcontracts that would be at least equal to the percentage goal for LBE utilization specified by the contractor;
 - (c) written notification to association of small, minority and women contractors soliciting specific subcontractors;
 - (d) written notification by certified mail to LBE firms that their interest in the contract is solicited for specific work items and their estimated values;
 - (e) demonstration of efforts made to select portions of the work for performance by LBE firms in order to increase the likelihood of achieving the stated goal;
 - (f) documented efforts to negotiate with LBE firms for specific subcontracts, including at a minimum:
 - (i) The names, address and telephone numbers of LBE firms that are contacted;
 - (ii) A description of the information provided to LBE firms regarding the plans and specifications for portions of the work to be performed;
 - (iii) Documentation showing that no reasonable price can be obtained from LBE firms;
 - (iv) A statement of why agreements with LBE firms were not reached;
 - (g) a statement of the reason for rejecting any LBE firm which the contractor deemed to be unqualified; and
 - (h) documentation of efforts made to assist the LBE firms contacted that needed assistance in obtaining required insurance.

(E) Unless otherwise waived by the Commissioner with the approval of the Office of Economic and Financial Opportunity, failure of a proposed contractor to provide the information required by paragraphs (C) and (D) above may render the bid non-responsive and the Contract may not be awarded to the bidder. If the contractor states that it will subcontract a specific portion of the work, but can demonstrate despite good faith efforts it cannot achieve its required LBE percentage for subcontracted work until after award of Contract, the Contract may be awarded, subject to a letter of compliance from the contractor stating that it will comply with Administrative Code Section 6-108.1 and subject to approval by the Commissioner. If the contractor has not met its required LBE percentage prior to award, the contractor shall demonstrate that a good faith effort has been made subsequent to award to obtain LBEs on each subcontract until it meets the required percentage.

(F) When a bidder indicates prior to award that no work will be subcontracted, no work may be subcontracted without the prior written approval of the Commissioner, which shall be granted only if the contractor in good faith seeks LBE subcontractors at least six weeks prior to the start of work.

(G) The contractor may not substitute or change any LBE which was identified prior to award of the contract without the written permission of the Commissioner. The contractor shall make a written application to the Commissioner for permission to make such substitution or change, explaining why the contractor needs to change its LBE subcontractor and how the contractor will meet its LBE subcontracting requirement. Copies of such application must be served on the originally identified LBE by certified mail return receipt requested, as well as the proposed substitute LBE. The Commissioner shall determine whether or not to grant the contractor's request for substitution.

38. Bid Submission Requirements

The Bid Submission Requirements are set forth on page 2 of the Bid Booklet.

39. Comptroller's Certificate

This Contract shall not be binding or of any force unless it is registered by the Comptroller in accordance with Section 328 of the City Charter and the Procurement Policy Board Rules. This Contract shall continue in force only after annual appropriation of funds by the City of New York and certification as hereinabove set forth.

40. Procurement Policy Board Rules

This Invitation For Bids is subject to the Rules of the Procurement Policy Board of the City of New York. In the event of a conflict between said Rules and a provision of this Invitation For Bids, the Rules shall take precedence.

41. DDC Safety Requirements

The DDC Safety Requirements apply to the work to be performed pursuant to the Contract. The DDC Safety Requirements are set forth on the following pages.

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
SAFETY REQUIREMENTS

June 2015

THE DDC SAFETY REQUIREMENTS INCLUDE THE FOLLOWING SECTIONS:

- I. POLICY ON SITE SAFETY
- II. PURPOSE
- III. DEFINITIONS
- IV. RESPONSIBILITIES
- V. SAFETY QUESTIONNAIRE
- VI. SAFETY PROGRAM AND SITE SAFETY PLAN
- VII. KICK-OFF/PRE-CONSTRUCTION MEETINGS AND SAFETY REVIEW
- VIII. EVALUATION DURING WORK IN PROGRESS
- IX. SAFETY PERFORMANCE EVALUATION

THIS PAGE INTENTIONALLY LEFT BLANK

I. POLICY ON SITE SAFETY

The City of New York Department of Design and Construction (DDC) is committed to a policy of injury and illness prevention and risk management for construction work that will ensure the safety and health of the workers engaged in the projects and the protection of the general public. Therefore, it is DDC's policy that work carried out by Contractors on DDC jobsites must, at a minimum, comply with applicable federal, state and city laws, rules and regulations, including without limitation:

- U. S. Department of Labor 29 Code of Federal Regulations (CFR) Part 1926 and applicable Sub-parts of Part 1910 – U.S. Occupational Safety and Health Administration (OSHA); New York State Department of Labor Industrial Code Rule 23 – Protection in Construction, Demolition and Excavation;
- New York City Construction Codes, Title 28
- NYC Department of Transportation Title 34 Chapter 2 – Highway Rules
- New York State Department of Labor Industrial Code Rule 16 NYCRR Part 753
- Title 15 of the Rules of the City of New York, Chapter 13 Citywide Construction Dust Mitigation
- Manual on Uniform Traffic Control Devices (MUTCD)
- Title 15 of the Rules of the City of New York, Chapter 28 Citywide Construction Noise Mitigation

II. PURPOSE

The purpose of this policy is to ensure that Contractors perform their work and supervise their employees in accordance with all applicable federal, state and city rules and regulations. Further, Contractors will be expected to minimize or eliminate jobsite and public hazard, through a planning, inspection, auditing and corrective action process. The goal is to control risks so that injuries, illnesses and accidents to contractors' employees, DDC employees and the general public, as well as damage to city-owned and private property, are reduced to the lowest level feasible.

III. DEFINITIONS

Agency Chief Contracting Officer (ACCO): The ACCO shall mean the person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO.

Competent Person: As defined by OSHA, an individual who is capable of identifying existing and predictable hazards in the surroundings or working conditions that are unsanitary, hazardous, or dangerous to employees or the general public, and who has authorization to take prompt corrective measures to eliminate them.

Construction Safety Auditor: A representative of the QA&CS Construction Safety Unit who provides inspection and assessment services to enhance health and safety on all DDC construction projects. The activities of the Construction Safety Auditor include performing site surveys, reviewing health and safety plans, reviewing construction permits, and rendering technical advice and assistance to DDC Resident Engineers and Project Managers.

Construction Safety Unit: A part of QA&CS within the Division of Program Management/ Safety & Site Support that assesses contractor safety on DDC jobsites and advises responsible parties of needed corrective actions.

Construction Superintendent: A representative of the contractor responsible for overseeing performance of the required construction work. This individual must engage in sound construction practices, and is responsible to maintain a safe work site. In the case of a project involving the demolition, alteration or new construction of buildings, the Construction Superintendent must be licensed by the NYC Department of Buildings.

Contractor: For purposes of these Safety Requirements, the term "Contractor" shall mean any person or entity that enters into a contract for the performance of construction work on a DDC project. The term "Contractor" shall include any person or entity which enters into any of the following types of contracts: (1) a prime construction contract for a specific project, (2) a prime construction contract using the Job Order Contracting System ("JOCS Contract"), and (3) a subcontract with a CM/Builder ("First Tier Subcontract").

Daily Safety Job Briefing: Daily jobsite safety meetings, giving to all jobsite personnel by contractor, with the purpose of discussing project specific safety procedures for the scheduled construction work.

Director - Quality Assurance and Construction Safety (QA&CS): Responsible for the operations of the QACS Construction Safety Unit and the DDC Site Safety management programs.

Job Hazard Analysis (JHA): A process of identifying the major job steps and any potential site-specific hazards that may be present during construction and establishing the means and methods to eliminate or control those hazards.

Qualified Person: As defined by OSHA, an individual who, by possession of a recognized degree, certificate, license or professional standing, or who by extensive knowledge, training, and experience, has successfully demonstrated his or her ability to solve problems relating to the subject matter, the work, or the project. Qualified Persons are required under regulation to address issues pertaining, but without limit, to fall protection, scaffold design and trenching and shoring, among others.

Project Site: Those areas indicated in the Contract Documents where the Work is to be performed.

Project Safety Representative: The designated project safety representative shall have completed an authorized 30 hour OSHA Construction Safety Course and other safety training applicable to Contractor's/subcontractor's project work. Except in instances where a dedicated Project Safety Manager is required, a Project Safety Representative may also function as a superintendent, foreman or crew leader on the Project, but must have sufficient experience and authority to undertake corrective actions and must qualify to be a competent person. No work is to be performed on site when a Project Safety Representative is not present.

Project Safety Manager: A dedicated, full-time project safety manager may be a contractual requirement on large projects or projects deemed by DDC to be particularly high risk. This would be in addition or in lieu of a Contractor's Project Safety Representative. This individual shall not have any other assigned duties. This individual shall have received, at a minimum an authorized 30 hour OSHA Construction Safety Course. Other examples of acceptable training are OSHA Safety and Health Standards for the Construction Industry training program (OSHA 510), Certified Safety Professional (CSP), Certified Industrial Hygienist (CIH) or a degree/certificate in a safety and health from a college-level curriculum.

A Project Safety Manager shall possess the additional training, years of experience, and skills necessary to thoroughly understand the health and safety hazards and controls for large construction projects, including the full scope of the specific Work.

QA&CS – Quality Assurance and Construction Safety of the New York City Department of Design and Construction.

Resident Engineer (RE) / Construction Project Manager (CPM): Representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the work. (The RE/CPM may be a third-party consultant, including a Construction Management firm, retained by DDC)

Safety Program: Established by the Contractor that covers all operations of that Contractor and establishes the Contractor's overall safety policy, regulatory compliance plan and minimum safety standards. The Safety Program must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

Safety Questionnaire: Used by DDC to evaluate Contractor's current and past safety performance. It is required to be completed by all Contractors initially when submitting bids for Construction work, or when being pre-qualified and updated annually or as requested by the DDC.

Site Safety Manager: For certain projects, as defined in NYC Construction Codes – Title 28, the Contractor shall provide a Site Safety Manager with a Site Safety Manager License issued by the NYC Department of Building.

Site Safety Plan: A site-specific safety plan developed by the Contractor for a specific project. The Site Safety Plan must identify hazards associated with the project, and include specific safety procedures and training appropriate and

necessary to complete the work. The Site Safety Plan must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

Unsafe or Unhealthy Condition: A condition that could be potentially hazardous to the health and safety of personnel or the public, and/or damaging to equipment, machinery, property or the environment.

Weekly Safety Meetings: Weekly documented jobsite safety meetings, given to all jobsite personnel by contractor, with the purpose of discussing general safety topics and job specific requirements encountered at the DDC work site.

Work: The construction required by the Contract Documents whether completed or partially completed, performed by the Contractor/ subcontractors. Work refers to the furnishing of labor, furnishing and incorporating materials and equipment into the construction and providing any service required by the Contract Documents to fulfill the Contractor's obligation to complete the Project.

IV. RESPONSIBILITIES

All persons who manage, perform, and provide support for construction projects shall conduct operations in compliance with the requirements identified in this Policy and all applicable governing regulatory agency requirements and guidelines pertaining to safety in construction.

A. DDC or CM Resident Engineer / Construction Project Manager

- Monitors the issuance of safety- related permits, approvals and drawings and maintains copies on site.
- Monitors construction-related work activities to confirm that they are conducted in accordance with DDC policies and all applicable regulations that pertain to construction safety.
- Maintains documentation and periodically attends weekly safety meetings and daily safety job briefings.
- Notifies the Construction Safety Unit and the ACCO's Insurance and Risk Management Unit of project- related accidents and emergencies, as per DDC's Construction Safety Emergency and Accident Notification and Response Protocol.
- Gathers facts related to all accidents and prepares DDC Construction Accident Report.
- Notifies the Construction Safety Unit within two (2) hours of the start of an inspection by any outside regulatory agency personnel, including OSHA, NYC DOB or others and forwards a copy of the inspection report within three days of its receipt.
- Monitors the conditions at the site for conformance with the contractor's Site Safety Plan and DDC construction documents.
- Notifies the contractor and DDC in the event that any condition or activity exists that is not in compliance with the contractor's Site Safety Plan, applicable federal, state or local codes or any condition that presents a potential risk of injury to the public or workers or possible damage to property.
- Notifies DDC of any unsafe or unhealthy condition and directs the contractor to provide such labor, materials, equipment and supervision to abate such conditions.
- Escort and assist QA&CS Construction Safety Auditors during the field and record inspections.
- Reports emergency conditions to the Construction Safety Unit immediately.

B. Contractors

- Submit a completed Safety Questionnaire and other safety performance related documentation with its bid or as part of a pre-qualification package.
- Complete a written Job Hazard Analysis (JHA) that identifies safety hazards for project specific work tasks and hazard control methods. A written JHA shall be available at the site for reference and included in the Site Safety Plan submitted by the contractor.
- Submit a Site Safety Plan and Safety Program within 30 days from the Award Date or as otherwise directed. The Site Safety Plan and Safety Program are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. The Site Safety Plan shall be revised and updated as necessary.

City of New York Department of Design and Construction: Safety Requirements
Safety and Site Support– Quality Assurance and Construction Safety

- Develop project specific safety procedures to protect general public during all construction activities for the duration of the project.
- Ensure that all employees are aware of the hazards associated with the project through documented formal and informal training and/or other communications. Conduct and document weekly safety meetings and daily job briefing sessions for the duration of the project. Documentation to be provided to the RE/CPM on a monthly basis.
- Name the Project Safety Representative and Project Safety Manager, if required. The Contractor will be required to identify the Project Safety Representative and Project Safety Manager in the Site Safety Plan. Resumes, outlining the qualification and experience for the Project Safety Representative and Project Safety Manager, shall be available upon request. DDC reserves the right to request that the Contractor replace any Project Safety Representative or Project Safety Manager for any reason at any time during the project.
- Name a Competent Person(s), The Contractor will be required to identify a Competent Person(s) in the Site Safety Plan.
- Comply with all mandated federal, state and local safety and health rules and regulations.
- Comply with all provisions of the Site Safety Plan.
- Conduct applicable safety training prior to the commencement of work at the site. All training records (OSHA 10-hour, flagger, scaffold, fall protection, confined space entry, etc.) shall be provided to the RE/CPM prior to mobilization, included in the Site Safety Plan, kept current during the course of the project, and available for review. Prior to performing any work on DDC project all employees shall have successfully completed, within the previous five calendar years, a 10 Hour OSHA construction safety course.
- As part of the Site Safety Plan, prepare a site specific programs and plans, such as MPT plan, steel erection plan, confined space program, fall protection plan, demolition plan, etc. (if not otherwise provided in the contract documents) and comply with all of its provisions.
- Conduct and document site-specific safety orientation for Contractor personnel to review the hazards associated with the project as identified in the Site Safety Plan and the specific safety procedures and controls that will be used to protect workers, the general public and property. The Project Safety Representative and/or Project Safety Manager will conduct this training prior to mobilization and provide documentation to the RE/CPM.
- Provide, replace and adequately maintain at or around the project site, suitable and sufficient signage, lights, barricades and enclosures (fences, sidewalk sheds, netting, bracing, etc.).
- Report unsafe or unhealthy conditions to the RE/CPM as soon as practical, but no more than 24 hours after discovery, and take prompt actions to remove or abate such conditions.
- Report any accidents involving injuries to workers or the general public, as well as property damage, to the RE/CPM within one (1) hour.
- Following an accident, the Contractor shall not remove or alter any equipment, structure, material, or evidence related to the accident. Exception: Immediate emergency procedures taken to secure structures, temporary construction, operations, or equipment that pose a continued imminent danger or facilitate assistance for persons who are trapped or who have sustained bodily injury.
- Notify the RE/CPM within one (1) hour of the start of an inspection by any outside regulatory agency personnel, including OSHA, NYC DOB or others.
- Maintain all records pertaining to all required compliance documents and accident and injury reports.
- Address DDC recommendations on safety, which shall in no way relieve the Contractor of its responsibilities for safety on the project. The Contractor has sole responsibility for safety.

V. SAFETY QUESTIONNAIRE

DDC requires that all Contractors provide information regarding their current and past safety performance and programs. This will be accomplished by the use of the DDC Safety Questionnaire. As a part of the bid submittal package, the contractor must submit a completed DDC Safety Questionnaire listing company workers' compensation experience modification rating and OSHA Incident Rates for the three (3) years prior to the date of the bid opening. DDC may request a Contractor to update its Questionnaire at any time or to provide more detailed information. The Contractor must provide the requested information within 15 days.

The following criteria will be used by DDC in reviewing the Contractor's responsibility, which will be based on the information provided on the questionnaire:

City of New York Department of Design and Construction: Safety Requirements
Safety and Site Support– Quality Assurance and Construction Safety

- Criteria 1: OSHA Injury and Illness Rates (I&IR) are no greater than the average for the industry (based on the most current Bureau of Labor Statistics data for the Contractors SIC code); and
- Criteria 2: Insurance workers compensation Experience Modification Rate (EMR) equal to or less than 1.0; and
- Criteria 3: Any willful violations issued by OSHA or NYC DOB within the last three (3) years; and
- Criteria 4: A fatality (worker or member of public) and injuries, requiring OSHA notification, experienced on or near Contractor's worksite within the last three (3) years; and
- Criteria 5: Past safety performance on DDC projects (accidents; status of safety program and site safety plan submittals; etc.)
- Criteria 6: OSHA violation history for the last three (3) years;
- Criteria 7: Contractor shall provide OSHA Injury and Illness Records (currently OSHA 300 and 300A Logs) for the last three (3) years.

If the Contractor fails to meet the basic criteria listed above, the Construction Safety Unit may request, through the ACCO, more details concerning the Contractor's safety experience. DDC may request the Contractor to provide copies of, among other things, accident investigation reports, OSHA records, OSHA and NYC DOB citations, EPA citations and written corrective action plan.

VI. SAFETY PROGRAM AND SITE SAFETY PLAN

Within thirty (30) days from the Award Date, or as otherwise directed, the Contractor shall submit the following: (1) Safety Program, and (2) Site Safety Plan. The Safety Program shall set forth the Contractor's overall safety policy, regulatory compliance plan and minimum safety standards. The Site Safety Plan shall identify project work scope, safety hazards associated with the project tasks, and include specific safety procedures and training appropriate and necessary to complete the work. The Safety Program and the Site Safety Plan are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. Failure by the Contractor to submit an acceptable Site Safety Plan and Safety Program shall be grounds for default.

Safety Program: Corporate Safety Program established by the Contractor that includes the Contractor's overall safety policy, regulatory compliance plan and basic safety procedures covering all aspects of construction operations, performed by the Contractor. The Safety Program shall be a written document with a separate section describing each element of the Safety Program. The Safety Program shall have at minimum the following elements applicable to the Contractor's operations:

- Responsibility and Organization – Contractor's company organization chart, including titles, names, contact information, roles and responsibilities for key personnel, etc.
- Safety Training Program – Contractor's corporate training program.
- Hazard Corrective Actions – Criteria for safety inspections, identification of safety non-compliances, implementation and verification of corrective actions, forms to document safety inspections results, etc.
- Accident/Exposure Investigation
- Recordkeeping and Reporting Injuries – Responsible staff; reporting and recording criteria; OSHA 300 and 300A form completion, etc.
- Fire Protection and Prevention Program
- Housekeeping
- Illumination
- Sanitation
- Personal Protective Equipment (PPE) – Company policy for the use of head protection, foot protection, hearing protection, eye and face protection, protective clothing, and any additional protective equipment based on work tasks; PPE inspection and replacement policy.
- Hazard Communication Program
- Employee Emergency Action Plan
- Protection of Underground Facilities and Utilities
- Ionizing/Nonionizing Radiation
- Material Handling, Storage, Use and Disposal
- Tools – Hand and Power
- Signs, Signals, and Barricades

City of New York Department of Design and Construction: Safety Requirements
Safety and Site Support– Quality Assurance and Construction Safety

- Scaffold – Local Law 52 requirements, installation, use, inspection, dismantling, training and general safety requirements.
- Welding and Cutting
- Electrical Safety
- Fall Protection
- Cranes, Derrick, Hoists, Elevators, Conveyors
- Excavation Safety
- Concrete and Masonry Construction
- Maintenance and Protection of Traffic
- Steel Erection
- Demolition
- Blasting and the Use of Explosives
- Stairways and Ladders
- Toxic and Hazardous Substances
- Alcohol and Drug Abuse Policy
- Rodents and Vermin
- Occupational Noise Exposure
- Confined Space Program – General confined Space Program: training requirements, confined space hazard evaluation procedure, atmospheric testing procedure, confined space classification, permit-required procedure, communication procedure, rescue procedure, forms, etc.
- Construction Vehicles/Heavy Equipment
- Dust Control Procedures

Site Safety Plan: The Site Safety Plan shall be a written document and shall apply to all project specific Contractor and subcontractor operations, and shall have at a minimum, the following elements with each element described in a separate section (It may be necessary to modify the basic format for certain unique or high-risk projects, such as tunnels or high-rise construction):

- Project Work Scope – Detailed information regarding work tasks that will be performed by contractor and subcontractors under the project.
- Responsibility and Organization – Contractor’s organization chart with responsible staff for the project, including titles, names, contact information, roles and responsibilities.
- Safety Training and Education – OSHA 10 Hours training, requirements for daily safety briefings and weekly safety meetings, any work task specific training, responsible staff for implementation of training program for the project.
- Job Hazard Analysis (JHA) – Project specific Job Hazard Analysis including work tasks, identified hazards, hazard control methods (administrative, engineering, PPE), contractor’s name, project id, location, name and signature of a certifying person, hazard assessment date.
- Protection of Public
- Hazard Corrective Actions – Responsible staff, forms, frequency of safety inspections and implementation of corrective actions.
- Accident/Exposure Investigation – Accident/incident notification procedure of DDC project staff. Project specific procedures for accident investigation and implementation of corrective actions.
- First Aid and Medical Attention – Responsible staff, location and inspection of First Aid kit, directions to local hospitals; emergency telephone numbers.
- Project Specific Fire Protection and Prevention Program.
- Project Specific Illumination Procedure.
- Project Specific Sanitation Procedure.
- Personal Protective Equipment (PPE)
- Hazard Communication Program – Responsible staff; training; SDS records, project specific list of chemical; location of the program and SDS records.
- Means of Egress – Information regarding free and unobstructed egress from all parts of the building or structure; exit marking; maintenance of means of egress, etc.
- Employee Emergency Action Plan – Project specific: responsible staff, emergency alarm system, evacuation procedure, procedure to account for employees after evacuation, etc.
- Evacuation Plan – Project specific evacuation plan (drawing/scheme) with exists and evacuation routes.

City of New York Department of Design and Construction: Safety Requirements
Safety and Site Support– Quality Assurance and Construction Safety

- Protection of Underground Facilities and Utilities, including responsible staff.
- Ionizing/Nonionizing Radiation – Competent person, license and qualification requirements, type of radiation, employees exposure and protection, etc.
- Material Handling, Storage, Use and Disposal – Project specific information regarding material storage and disposal.
- Signs, Signals, and Barricades – Use of danger/warning signs, sidewalk closure, safety instruction signs, pedestrian fencing and barricades, etc.
- Scaffold – Project specific scaffold types, training, scaffold drawings, competent person, criteria for project specific scaffold, falling object protection.
- Welding and Cutting – project specific procedure for welding and cutting, including all necessary safety requirements such as fire prevention, personal protective equipment, hot work permits, FDNY certificate requirements.
- Fall Protection – Project specific information regarding selected fall protection systems, fall protection plan.
- Cranes, Derrick, Hoists, Elevators, Conveyors – project specific equipment information including type, rated load capacity, manufacture specification requirements, competent person, exposure to falling load, inspection, recordkeeping, clearance requirements, communication procedure, ground lines, permits.
- Excavation Safety – Competent person, project specific protective system.
- Maintenance and Protection of Traffic Plan – Project specific MPT plan, flagmen training.
- Steel Erection – Site specific erection plan, requirements for applicable written notifications, competent person.
- Demolition – Engineering survey, including written evidence, disconnection of all effected utilities, identification of all hazardous chemicals, materials, gases, etc., floor openings, chutes, inspection and maintenance of all stairs/passageways, removal of materials/debris/structural elements, lock out/tag out, competent person.
- Blasting and the Use of Explosives – Project specific safety procedures, warning signs, training/qualification, transportation, storage and use of explosives, inspection.
- Toxic and Hazardous Substances – Safety procedures for substances to be used on project.
- Noise Mitigation Plan – Completed project specific Noise Mitigation Plan.
- Confined Space Program – Project specific Confined Space Program, responsible staff, training records, equipment information, rescue procedure, list of project specific confined spaces, forms.
- Construction Vehicles/Heavy Equipment – Type of construction vehicles/heavy equipment to be used on site.
- Dust Mitigation Plan – Completed project specific Dust Mitigation Plan.

The most critical component of the Site Safety Plan is the Job Hazard Analysis (JHA) section. The JHA form is a written document prepared by the contractor. The contractor must conduct a site and task assessment JHA to identify the major job steps and any potential safety or environmental hazards related to performance of the work, eliminate or implement controls for the potential hazards, and identify proper personal protective equipment for the task. The JHA shall be communicated to all contractor/subcontractor personnel on site.

The initial Job Hazard Assessment form shall be included in the contractor's Site Safety Plan and the current form shall be available at the construction site for reference.

Certain DDC programs, such as Job Order Contracting System (JOCS), may not necessarily require Site Safety Plans. The JOCS contractor shall submit a Safety Program. The Site Safety Plan requirement for the JOCS contractor will be determined by QA&CS based on a project work scope, construction activities and project location. In addition, certain DDC Operating Units may establish client-specific program or safety requirements. The contractor's Site Safety Plan must address such client-specific program or safety requirements.

VII. KICK-OFF MEETINGS/PRE-CONSTRUCTION AND SAFETY REVIEW

RE/CPM shall invite QA&CS Construction Safety Unit to the construction kick-off meeting. A QA&CS representative will participate in this meeting with the Contractor and RE/CPM prior to the start of the project for the purpose of:

City of New York Department of Design and Construction: Safety Requirements
Safety and Site Support- Quality Assurance and Construction Safety

- A. Reviewing the safety issues detailed in the contract.
- B. Reviewing the Site Safety Plan.
- C. Reviewing any new issues or information that was not previously addressed.
- D. Discussing planned inspections and audits of the site by QA&CS personnel.

VIII. EVALUATION DURING WORK IN PROGRESS

The Contractor's adherence to these Safety Requirements will be monitored throughout the project. This will be accomplished by the following:

- A. Use of a safety checklist by a representative of the Construction Safety Unit or other designated DDC representative or Consultant during regular, unannounced inspections of the job site. Field Exit Conferences will be held with the RE/CPM, Contractor Project Safety Representatives.
- B. The RE/CPM will continually monitor the safety and environmental performance of the contractor's employees and work methods. Deficiencies shall be brought to the attention of the contractor's representative on site for immediate correction. The DDC representative will maintain a written record of these deficiencies and have these records available upon request. Any critical deficiencies shall be immediately reported to QA&CS phone# (718) 391-1624 or (718) 391-1911.
- C. If the Contractor's safety performance during the project is not up to DDC standards (safety performance measure, accident/incident rate, etc.) the Director - QA&CS, or his/her designee will meet with the Contractor's Project Safety Representative and or Project Safety Manager, the DDC Project Manager, the RE/CPM, and the DDC Environmental Specialist (if environmental issues are involved). The purpose of this meeting is to 1) determine the level of non-compliance; 2) explain and clarify the safety/environmental provisions; 3) agree on a future course of action to correct the deficiencies.
- D. If the deficiencies continue to occur with inadequate attention by the contractor, this shall, among other remedies available, be grounds for default.
- E. The contractor shall within 1 hour inform the RE/CPM/CM of all accidents/incidents including all fatalities, any injuries to employees or members of the general public, and property damage (e.g., structural damage, equipment rollovers, utility damage, loads dropped from crane). The RE/CPM shall notify the Construction Safety Unit as per DDC's Construction Safety Emergency and Accident Notification and Response Protocol and shall maintain a record of all contractor accidents/incidents for the project.
- F. The Construction Safety Unit shall be notified within two (2) hours of the start of any NYS-DOL/ NYC-COSH/ OSHA/ EPA inspections.

IX. SAFETY PERFORMANCE EVALUATION

The contractor's safety record, including accident/incident history and DDC safety inspection results, will be considered as part of the Contractor's performance evaluation at the conclusion of the project. Poor safety performance during the course of the project shall be a reason to rate a Contractor unsatisfactory which may be reflected in the City's Vendex system and will be considered for future procurement actions as set forth in the City's Procurement Policy Board Rules.

NOTICE TO BIDDERS

The City of New York has issued a new Standard Construction Contract. The new Contract, which is incorporated in this bid, is different from the 2013 version previously used by the City. Some of the significant changes are listed below. In addition, this March 2017 version incorporates the Insurance Rider (Articles 22.1.1(c) and 22.3.3), the Paid Sick Leave Law Contract Rider (Article 35.5), and the Hiring and Employment Rider: HireNYC and Reporting Requirements (Article 35.6). This notice is only a partial listing. Please refer to the Contract itself for a full understanding of the changes and the actual text of the changes that were made. The text of the revised Standard Construction Contract is the controlling document if there are any discrepancies between this notice and the Standard Construction Contract.

Significant changes include the following:

- **ARTICLE 11 - DAMAGES CAUSED BY DELAYS:** Article 11 no longer provides for agencies to make determinations on claims for damages for delay or make payments for those claims through a change order. Instead claims will be submitted to the Comptroller in accordance with the standards in the Contract. The revised Article 11 also sets forth additional detail of what delay costs are compensable and how they are to be calculated.
- **ARTICLE 12 - COORDINATION WITH OTHER CONTRACTORS:** The March 2017 version revises Article 12.3 concerning the Engineer's failure to issue directions to an Other Contractor.
- **ARTICLE 14 - COMPLETION AND FINAL ACCEPTANCE OF THE WORK:** The March 2017 version clarifies Article 14.2.2 concerning the dates to complete punch list work.
- **ARTICLE 30 - NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS:** The March 2017 version clarifies the relationship between the requirements in Article 30.1 concerning when the contractor must submit notice and documentation of claims for delay damages, extra work, and other claims and the requirements that are set forth in Articles 11 and 27.
- **ARTICLE 56 - CLAIMS AND ACTIONS THEREON:** The March 2017 version revises Article 56.2.2 concerning the time to commence an action arising out of the Commissioner's exercise of his/her right to complete punch list or unsatisfactory work.
- **ARTICLE 78 - EXAMINATION AND VIEWING OF SITE, CONSIDERATION OF OTHER SOURCES OF INFORMATION AND CHANGED SITE CONDITIONS:** The March 2017 version adds a new Article 78 requiring pre-bid viewing of the site and allowing the contractor to obtain a change order for extra work due to changed subsurface conditions.

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT

March 2017

(NO TEXT ON THIS PAGE)

*CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT*

TABLE OF CONTENTS

CHAPTER I: THE CONTRACT AND DEFINITIONS	1
ARTICLE 1. THE CONTRACT	1
ARTICLE 2. DEFINITIONS	1
CHAPTER II: THE WORK AND ITS PERFORMANCE.....	4
ARTICLE 3. CHARACTER OF THE WORK	4
ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION	4
ARTICLE 5. COMPLIANCE WITH LAWS	5
ARTICLE 6. INSPECTION	10
ARTICLE 7. PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION	11
CHAPTER III: TIME PROVISIONS	12
ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK	12
ARTICLE 9. PROGRESS SCHEDULES	13
ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL	13
ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY	14
ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS	18
ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE	19
ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK	21
ARTICLE 15. LIQUIDATED DAMAGES	23
ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION	23
CHAPTER IV: SUBCONTRACTS AND ASSIGNMENTS	24
ARTICLE 17. SUBCONTRACTS	24
ARTICLE 18. ASSIGNMENTS	26
CHAPTER V: CONTRACTOR'S SECURITY AND GUARANTEE	26
ARTICLE 19. SECURITY DEPOSIT	26
ARTICLE 20. PAYMENT GUARANTEE	27
ARTICLE 21. RETAINED PERCENTAGE	29
ARTICLE 22. INSURANCE	30
ARTICLE 23. MONEY RETAINED AGAINST CLAIMS	36
ARTICLE 24. MAINTENANCE AND GUARANTY	37
CHAPTER VI: CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM	38
ARTICLE 25. CHANGES	38
ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK	38
ARTICLE 27. RESOLUTION OF DISPUTES	41
ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS	45
ARTICLE 29. OMITTED WORK	46
ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS	46
CHAPTER VII: POWERS OF THE RESIDENT ENGINEER, THE ENGINEER OR ARCHITECT AND THE COMMISSIONER	48
ARTICLE 31. THE RESIDENT ENGINEER	48
ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER	48
ARTICLE 33. THE COMMISSIONER	48
ARTICLE 34. NO ESTOPPEL	49
CHAPTER VIII: LABOR PROVISIONS.....	49
ARTICLE 35. EMPLOYEES	49
ARTICLE 36. NO DISCRIMINATION	57
ARTICLE 37. LABOR LAW REQUIREMENTS	59

ARTICLE 38. PAYROLL REPORTS.....	64
ARTICLE 39. DUST HAZARDS	64
CHAPTER IX: PARTIAL AND FINAL PAYMENTS	65
ARTICLE 40. CONTRACT PRICE	65
ARTICLE 41. BID BREAKDOWN ON LUMP SUM.....	65
ARTICLE 42. PARTIAL PAYMENTS.....	65
ARTICLE 43. PROMPT PAYMENT.....	66
ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT.....	66
ARTICLE 45. FINAL PAYMENT.....	67
ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT.....	68
ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION.....	69
CHAPTER X: CONTRACTOR'S DEFAULT	69
ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT	69
ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT	71
ARTICLE 50. QUITTING THE SITE.....	71
ARTICLE 51. COMPLETION OF THE WORK.....	71
ARTICLE 52. PARTIAL DEFAULT	71
ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK	72
ARTICLE 54. OTHER REMEDIES.....	72
CHAPTER XI: MISCELLANEOUS PROVISIONS	72
ARTICLE 55. CONTRACTOR'S WARRANTIES.....	72
ARTICLE 56. CLAIMS AND ACTIONS THEREON.....	73
ARTICLE 57. INFRINGEMENT	73
ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES	74
ARTICLE 59. SERVICE OF NOTICES	74
ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT.....	74
ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED	74
ARTICLE 62. TAX EXEMPTION	74
ARTICLE 63. INVESTIGATION(S) CLAUSE.....	76
ARTICLE 64. TERMINATION BY THE CITY	78
ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE	80
ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT	81
ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM	82
ARTICLE 68. ANTITRUST	82
ARTICLE 69. MACBRIDE PRINCIPLES PROVISIONS	83
ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB	85
ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS.....	85
ARTICLE 72. CONFLICTS OF INTEREST.....	85
ARTICLE 73. MERGER CLAUSE	85
ARTICLE 74. STATEMENT OF WORK.....	85
ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR	85
ARTICLE 76. ELECTRONIC FUNDS TRANSFER.....	85
ARTICLE 77. RECORDS RETENTION	86
ARTICLE 78. EXAMINATION AND VIEWING OF SITE, CONSIDERATION OF OTHER SOURCES OF INFORMATION AND CHANGED SITE CONDITIONS.....	86

**ARTICLE 79: PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED
BUSINESS ENTERPRISES IN CITY PROCUREMENT87**

SIGNATURES95

ACKNOWLEDGMENT BY CORPORATION96

ACKNOWLEDGMENT BY PARTNERSHIP.....96

ACKNOWLEDGMENT BY INDIVIDUAL96

ACKNOWLEDGMENT BY COMMISSIONER97

AUTHORITY98

COMPTROLLER'S CERTIFICATE98

MAYOR'S CERTIFICATE99

PERFORMANCE BOND #1100

PERFORMANCE BOND #2.....104

PAYMENT BOND108

(NO TEXT ON THIS PAGE)

WITNESSETH:

The parties, in consideration of the mutual agreements contained herein, agree as follows:

CHAPTER I: THE CONTRACT AND DEFINITIONS

ARTICLE 1. THE CONTRACT

1.1 Except for titles, subtitles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience), the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of this **Contract**:

1.1.1 All provisions required by law to be inserted in this **Contract**, whether actually inserted or not;

1.1.2 The Contract Drawings and Specifications;

1.1.3 The General Conditions and Special Conditions, if any;

1.1.4 The **Contract**;

1.1.5 The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet;

1.1.6 All Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed or the Order to Work.

1.2 Should any conflict occur in or between the Drawings and Specifications, the **Contractor** shall be deemed to have estimated the most expensive way of doing the **Work**, unless the **Contractor** shall have asked for and obtained a decision in writing from the **Commissioner** of the **Agency** that is entering into this **Contract**, before the submission of its bid, as to what shall govern.

ARTICLE 2. DEFINITIONS

2.1 The following words and expressions, or pronouns used in their stead, shall, wherever they appear in this Contract, be construed as follows, unless a different meaning is clear from the context:

2.1.1 “**Addendum**” or “**Addenda**” shall mean the additional Contract provisions and/or technical clarifications issued in writing by the Commissioner prior to the receipt of bids.

2.1.2 “**Agency**” shall mean a city, county, borough or other office, position, department, division, bureau, board or commission, or a corporation, institution or agency of government, the expenses of which are paid in whole or in part from the City treasury.

2.1.3 “**Agency Chief Contracting Officer**” (**ACCO**) shall mean a person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO, or his/her duly authorized representative.

2.1.4 **“Allowance”** shall mean a sum of money which the Agency may include in the total amount of the Contract for such specific contingencies as the Agency believes may be necessary to complete the Work, *e.g.*, lead or asbestos remediation, and for which the Contractor will be paid on the basis of stipulated unit prices or a formula set forth in the Contract or negotiated between the parties provided, however, that if the Contractor is not directed to use the Allowance, the Contractor shall have no right to such money and it shall be deducted from the total amount of the Contract.

2.1.5 **“City”** shall mean the City of New York.

2.1.6 **“City Chief Procurement Officer” (CCPO)** shall mean a person delegated authority by the Mayor to coordinate and oversee the procurement activity of Mayoral agency staff, including the ACCO and any offices which have oversight responsibility for the procurement of construction, or his/her duly authorized representative.

2.1.7 **“Commissioner”** shall mean the head of the Agency that has entered into this Contract, or his/her duly authorized representative.

2.1.8 **“Comptroller”** shall mean the Comptroller of the City of New York.

2.1.9 **“Contract”** or **“Contract Documents”** shall mean each of the various parts of the contract referred to in Article 1 hereof, both as a whole and severally.

2.1.10 **“Contract Drawings”** shall mean only those drawings specifically entitled as such and listed in the Specifications or in any Addendum, or any drawings furnished by the Commissioner, pertaining or supplemental thereto.

2.1.11 **“Contract Work”** shall mean everything required to be furnished and done by the Contractor by any one or more of the parts of the Contract referred to in Article 1, except Extra Work as hereinafter defined.

2.1.12 **“Contractor”** shall mean the entity which executed this Contract, whether a corporation, firm, partnership, joint venture, individual, or any combination thereof, and its, their, his/her successors, personal representatives, executors, administrators, and assigns, and any person, firm, partnership, joint venture, individual, or corporation which shall at any time be substituted in the place of the Contractor under this Contract.

2.1.13 **“Days”** shall mean calendar days, except where otherwise specified.

2.1.14 **“Engineer”** or **“Architect”** or **“Project Manager”** shall mean the person so designated in writing by the Commissioner in the Notice to Proceed or the Order to Work to act as such in relation to this Contract, including a private Architect or Engineer or Project Manager, as the case may be. Subject to written approval by the Commissioner, the Engineer, Architect or Project Manager may designate an authorized representative.

2.1.15 **“Engineering Audit Officer” (EAO)** shall mean the person so designated by the Commissioner to perform responsible auditing functions hereunder.

2.1.16 **“Extra Work”** shall mean Work other than that required by the Contract at the time of award which is authorized by the Commissioner pursuant to Chapter VI of this Contract.

2.1.17 **"Federal-Aid Contract"** shall mean a contract in which the United States (federal) Government provides financial funding as so designated in the Information for Bidders.

2.1.18 **"Final Acceptance"** shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

2.1.19 **"Final Approved Punch List"** shall mean a list, approved pursuant to Article 14.2.2, specifying those items of Work to be completed by the Contractor after Substantial Completion and dates for the completion of each item of Work.

2.1.20 **"Law"** or **"Laws"** shall mean the Constitution of the State of New York, the New York City Charter, the New York City Administrative Code, a statute of the United States or of the State of New York, a local law of the City of New York, any ordinance, rule or regulation having the force of law, or common law.

2.1.21 **"Materialman"** shall mean any corporation, firm, partnership, joint venture, or individual, other than employees of the Contractor, who or which contracts with the Contractor or any Subcontractor, to fabricate or deliver, or who actually fabricates or delivers, plant, materials or equipment to be incorporated in the Work.

2.1.22 **"Means and Methods of Construction"** shall mean the labor, materials, temporary structures, tools, plant, and construction equipment, and the manner and time of their use, necessary to accomplish the result intended by this Contract.

2.1.23 **"Notice to Proceed"** or **"Order to Work"** shall mean the written notice issued by the Commissioner specifying the time for commencement of the Work and the Engineer, Architect or Project Manager.

2.1.24 **"Other Contractor(s)"** shall mean any contractor (other than the entity which executed this Contract or its Subcontractors) who or which has a contract with the City for work on or adjacent to the building or Site of the Work.

2.1.25 **"Payroll Taxes"** shall mean State Unemployment Insurance (SUI), Federal Unemployment Insurance (FUI), and payments pursuant to the Federal Insurance Contributions Act (FICA).

2.1.26 **"Project"** shall mean the public improvement to which this Contract relates.

2.1.27 **"Procurement Policy Board" (PPB)** shall mean the Agency of the City of New York whose function is to establish comprehensive and consistent procurement policies and rules which shall have broad application throughout the City.

2.1.28 **"Required Quantity"** in a unit price Contract shall mean the actual quantity of any item of Work or materials which is required to be performed or furnished in order to comply with the Contract.

2.1.29 **"Resident Engineer"** shall mean the representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the Work.

2.1.30 **"Site"** shall mean the area upon or in which the Contractor's operations are carried on, and such other areas adjacent thereto as may be designated as such by the Engineer.

2.1.31 “**Small Tools**” shall mean items that are ordinarily required for a worker’s job function, including but not limited to, equipment that ordinarily has no licensing, insurance or substantive storage costs associated with it; such as circular and chain saws, impact drills, threaders, benders, wrenches, socket tools, etc.

2.1.32 “**Specifications**” shall mean all of the directions, requirements, and standards of performance applying to the Work as hereinafter detailed and designated under the Specifications.

2.1.33 “**Subcontractor**” shall mean any person, firm or corporation, other than employees of the Contractor, who or which contracts with the Contractor or with its subcontractors to furnish, or actually furnishes labor, or labor and materials, or labor and equipment, or superintendence, supervision and/or management at the Site. Wherever the word Subcontractor appears, it shall also mean sub-Subcontractor.

2.1.34 “**Substantial Completion**” shall mean the written determination by the Engineer that the Work required under this Contract is substantially, but not entirely, complete and the approval of the **Final Approved Punch List**.

2.1.35 “**Work**” shall mean all services required to complete the Project in accordance with the Contract Documents, including without limitation, labor, material, superintendence, management, administration, equipment, and incidentals, and obtaining any and all permits, certifications and licenses as may be necessary and required to complete the Work, and shall include both Contract Work and Extra Work.

CHAPTER II: THE WORK AND ITS PERFORMANCE

ARTICLE 3. CHARACTER OF THE WORK

3.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Work** shall be performed in accordance with the best modern practice, utilizing, unless otherwise specified in writing, new and unused materials of standard first grade quality and workmanship and design of the highest quality, to the satisfaction of the **Commissioner**.

ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION

4.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Means and Methods of Construction** shall be such as the **Contractor** may choose; subject, however, to the **Engineer’s** right to reject the **Means and Methods of Construction** proposed by the **Contractor** which in the opinion of the **Engineer**:

4.1.1 Will constitute or create a hazard to the **Work**, or to persons or property; or

4.1.2 Will not produce finished **Work** in accordance with the terms of the **Contract**; or

4.1.3 Will be detrimental to the overall progress of the **Project**.

4.2 The **Engineer’s** approval of the **Contractor’s Means and Methods of Construction**, or his/her failure to exercise his/her right to reject such means or methods, shall not relieve the **Contractor**

of its obligation to complete the **Work** as provided in this **Contract**; nor shall the exercise of such right to reject create a cause of action for damages.

ARTICLE 5. COMPLIANCE WITH LAWS

5.1 The **Contractor** shall comply with all **Laws** applicable to this **Contract** and to the **Work** to be done hereunder.

5.2 Procurement Policy Board Rules: This **Contract** is subject to the Rules of the **PPB** (“**PPB Rules**”) in effect at the time of the bid opening for this **Contract**. In the event of a conflict between the **PPB Rules** and a provision of this **Contract**, the **PPB Rules** shall take precedence.

5.3 Noise Control Code provisions.

5.3.1 In accordance with the provisions of Section 24-216(b) of the Administrative Code of the **City** (“**Administrative Code**”), Noise Abatement Contract Compliance, devices and activities which will be operated, conducted, constructed or manufactured pursuant to this **Contract** and which are subject to the provisions of the **City Noise Control Code** shall be operated, conducted, constructed, or manufactured without causing a violation of the **Administrative Code**. Such devices and activities shall incorporate advances in the art of noise control development for the kind and level of noise emitted or produced by such devices and activities, in accordance with regulations issued by the **Commissioner** of the **City Department of Environmental Protection**.

5.3.2 The **Contractor** agrees to comply with Section 24-219 of the Administrative Code and implementing rules codified at 15 Rules of the City of New York (“**RCNY**”) Section 28-100 *et seq.* In accordance with such provisions, the **Contractor**, if the **Contractor** is the responsible party under such regulations, shall prepare and post a Construction Noise Mitigation Plan at each **Site**, in which the **Contractor** shall certify that all construction tools and equipment have been maintained so that they operate at normal manufacturers operating specifications. If the **Contractor** cannot make this certification, it must have in place an Alternative Noise Mitigation Plan approved by the **City Department of Environmental Protection**. In addition, the **Contractor’s** certified Construction Noise Mitigation Plan is subject inspection by the **City Department of Environmental Protection** in accordance with Section 28-101 of Title 15 of **RCNY**. No **Contract Work** may take place at a **Site** unless there is a Construction Noise Mitigation Plan or approved Alternative Noise Mitigation Plan in place. In addition, the **Contractor** shall create and implement a noise mitigation training program. Failure to comply with these requirements may result in fines and other penalties pursuant to the applicable provisions of the **Administrative Code** and **RCNY**.

5.4 Ultra Low Sulfur Diesel Fuel: In accordance with the provisions of Section 24-163.3 of the **Administrative Code**, the **Contractor** specifically agrees as follows:

5.4.1 Definitions. For purposes of this Article 5.4, the following definitions apply:

5.4.1(a) “**Contractor**” means any person or entity that enters into a Public Works Contract with a **City Agency**, or any person or entity that enters into an agreement with such person or entity, to perform work or provide labor or services related to such Public Works Contract.

5.4.1(b) “Motor Vehicle” means any self-propelled vehicle designed for transporting persons or property on a street or highway.

5.4.1(c) “Nonroad Engine” means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.4.1(d) “Nonroad Vehicle” means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this term shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) horsepower or less and that are not used in any construction program or project.

5.4.1(e) “Public Works Contract” means a contract with a **City Agency** for a construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; a contract with a **City Agency** for the preparation for any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; or a contract with a **City Agency** for any final work involved in the completion of any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge.

5.4.1(f) “Ultra Low Sulfur Diesel Fuel” means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.4.2 Ultra Low Sulfur Diesel Fuel

5.4.2(a) All **Contractors** shall use Ultra Low Sulfur Diesel Fuel in diesel-powered Nonroad Vehicles in the performance of this **Contract**.

5.4.2(b) Notwithstanding the requirements of Article 5.4.2(a), **Contractors** may use diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) to fulfill the requirements of this Article 5.4.2, where the Commissioner of the **City** Department of Environmental Protection (“DEP Commissioner”) has issued a determination that a sufficient quantity of Ultra Low Sulfur Diesel Fuel is not available to meet the needs of **Agencies** and **Contractors**. Any such determination shall expire after six (6) months unless renewed.

5.4.2(c) **Contractors** shall not be required to comply with this Article 5.4.2 where the **City Agency** letting this **Contract** makes a written finding, which is approved, in writing, by the DEP Commissioner, that a sufficient quantity of Ultra Low Sulfur Diesel Fuel, or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is not available to meet the requirements of Section 24-163.3 of the Administrative Code, provided that such **Contractor** in its fulfillment of the

requirements of this **Contract**, to the extent practicable, shall use whatever quantity of Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is available. Any finding made pursuant to this Article 5.4.2(c) shall expire after sixty (60) **Days**, at which time the requirements of this Article 5.4.2 shall be in full force and effect unless the **City Agency** renews the finding in writing and such renewal is approved by the DEP Commissioner.

5.4.2(d) **Contractors** may check on determinations and approvals issued by the DEP Commissioner pursuant to Section 24-163.3 of the Administrative Code, if any, at www.dep.nyc.gov or by contacting the **City Agency** letting this **Contract**.

5.4.2(e) The requirements of this Article 5.4.2 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.3 Best Available Technology

5.4.3(a) All **Contractors** shall utilize the best available technology for reducing the emission of pollutants for diesel-powered Nonroad Vehicles in the performance of this **Contract**. For determinations of best available technology for each type of diesel-powered Nonroad Vehicle, **Contractors** shall comply with the regulations of the **City Department of Environmental Protection**, as and when adopted, Chapter 14 of Title 15 of the Rules of the City of New York (RCNY). The **Contractor** shall fully document all steps in the best available technology selection process and shall furnish such documentation to the **City Agency** or the DEP Commissioner upon request. The **Contractor** shall retain all documentation generated in the best available technology selection process for as long as the selected best available technology is in use.

5.4.3(b) No **Contractor** shall be required to replace best available technology for reducing the emission of pollutants or other authorized technology utilized for a diesel-powered Nonroad Vehicle in accordance with the provisions of this Article 5.4.3 within three (3) years of having first utilized such technology for such vehicle.

5.4.3(c) This Article 5.4.3 shall not apply to any vehicle used to satisfy the requirements of a specific Public Works Contract for fewer than twenty (20) **Days**.

5.4.3(d) The **Contractor** shall not be required to comply with this Article 5.4.3 with respect to a diesel-powered Nonroad Vehicle under the following circumstances:

5.4.3(d)(i) Where the **City Agency** makes a written finding, which is approved, in writing, by the DEP Commissioner, that the best available technology for reducing the emission of pollutants as required by this Article 5.4.3 is unavailable for such vehicle, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle.

5.4.3(d)(ii) Where the DEP Commissioner has issued a written waiver based upon the **Contractor** having demonstrated to the DEP Commissioner that the use of the best available technology for reducing the emission of pollutants might endanger the operator of such vehicle or those working near such vehicle, due to engine malfunction, the **Contractor** shall use whatever technology for

reducing the emission of pollutants, if any, is available and appropriate for such vehicle, which would not endanger the operator of such vehicle or those working near such vehicle.

5.4.3(d)(iii) In determining which technology to use for the purposes of Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above, the **Contractor** shall primarily consider the reduction in emissions of particulate matter and secondarily consider the reduction in emissions of nitrogen oxides associated with the use of such technology, which shall in no event result in an increase in the emissions of either such pollutant.

5.4.3(d)(iv) The **Contractor** shall submit requests for a finding or a waiver pursuant to this Article 5.4.3(d) in writing to the DEP Commissioner, with a copy to the **ACCO** of the **City Agency** letting this **Contract**. Any finding or waiver made or issued pursuant to Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above shall expire after one hundred eighty (180) **Days**, at which time the requirements of Article 5.4.3(a) shall be in full force and effect unless the **City Agency** renews the finding, in writing, and the DEP Commissioner approves such finding, in writing, or the DEP Commissioner renews the waiver, in writing.

5.4.3(e) The requirements of this Article 5.4.3 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.4 Section 24-163 of the Administrative Code. The **Contractor** shall comply with Section 24-163 of the Administrative Code related to the idling of the engines of motor vehicles while parking.

5.4.5 Compliance

5.4.5(a) The **Contractor's** compliance with Article 5.4 may be independently monitored. If it is determined that the **Contractor** has failed to comply with any provision of Article 5.4, any costs associated with any independent monitoring incurred by the **City** shall be reimbursed by the **Contractor**.

5.4.5(b) Any **Contractor** who violates any provision of Article 5.4, except as provided in Article 5.4.5(c) below, shall be liable for a civil penalty between the amounts of one thousand (\$1,000) and ten thousand (\$10,000) dollars, in addition to twice the amount of money saved by such **Contractor** for failure to comply with Article 5.4.

5.4.5(c) No **Contractor** shall make a false claim with respect to the provisions of Article 5.4 to a **City Agency**. Where a **Contractor** has been found to have done so, such **Contractor** shall be liable for a civil penalty of twenty thousand (\$20,000) dollars, in addition to twice the amount of money saved by such **Contractor** in association with having made such false claim.

5.4.6 Reporting

5.4.6(a) For all Public Works Contracts covered by this Article 5.4, the **Contractor** shall report to the **City Agency** the following information:

5.4.6(a)(i) The total number of diesel-powered Nonroad Vehicles used to fulfill the requirements of this Public Works Contract;

5.4.6(a)(ii) The number of such Nonroad Vehicles that were powered by Ultra Low Sulfur Diesel Fuel;

5.4.6(a)(iii) The number of such Nonroad Vehicles that utilized the best available technology for reducing the emission of pollutants, including a breakdown by vehicle model and the type of technology;

5.4.6(a)(iv) The number of such Nonroad Vehicles that utilized such other authorized technology in accordance with Article 5.4.3, including a breakdown by vehicle model and the type of technology used for each such vehicle;

5.4.6(a)(v) The locations where such Nonroad Vehicles were used; and

5.4.6(a)(vi) Where a determination is in effect pursuant to Article 5.4.2(b) or 5.4.2(c), detailed information concerning the **Contractor's** efforts to obtain Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm).

5.4.6(b) The **Contractor** shall submit the information required by Article 5.4.6(a) at the completion of **Work** under the Public Works Contract and on a yearly basis no later than August 1 throughout the term of the Public Works Contract. The yearly report shall cover **Work** performed during the preceding fiscal year (July 1 - June 30).

5.5 Ultra Low Sulfur Diesel Fuel. In accordance with the Coordinated Construction Act for Lower Manhattan, as amended:

5.5.1 Definitions. For purposes of this Article 5.5, the following definitions apply:

5.5.1(a) "Lower Manhattan" means the area to the south of and within the following lines: a line beginning at a point where the United States pierhead line in the Hudson River as it exists now or may be extended would intersect with the southerly line of West Houston Street in the Borough of Manhattan extended, thence easterly along the southerly side of West Houston Street to the southerly side of Houston Street, thence easterly along the southerly side of Houston Street to the southerly side of East Houston Street, thence northeasterly along the southerly side of East Houston Street to the point where it would intersect with the United States pierhead line in the East River as it exists now or may be extended, including tax lots within or immediately adjacent thereto.

5.5.1(b) "Lower Manhattan Redevelopment Project" means any project in Lower Manhattan that is funded in whole or in part with federal or State funding, or any project intended to improve transportation between Lower Manhattan and the two air terminals in the **City** known as LaGuardia Airport and John F. Kennedy International Airport, or between Lower Manhattan and the air terminal in Newark known as Newark Liberty International Airport, and that is funded in whole or in part with federal funding.

5.5.1(c) "Nonroad Engine" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.5.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower (HP) and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this term shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) HP or less and that are not used in any construction program or project.

5.5.1(e) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.5.2 Requirements. **Contractors** and **Subcontractors** are required to use only Ultra Low Sulfur Diesel Fuel to power the diesel-powered Nonroad Vehicles with engine HP rating of fifty (50) HP and above used on a Lower Manhattan Redevelopment Project and, where practicable, to reduce the emission of pollutants by retrofitting such Nonroad Vehicles with oxidation catalysts, particulate filters, or technology that achieves lowest particulate matter emissions.

5.6 Pesticides. In accordance with Section 17-1209 of the Administrative Code, to the extent that the **Contractor** or any **Subcontractor** applies pesticides to any property owned or leased by the **City**, the **Contractor**, and any **Subcontractor** shall comply with Chapter 12 of the Administrative Code.

5.7 Waste Treatment, Storage, and Disposal Facilities and Transporters. In connection with the **Work**, the **Contractor** and any **Subcontractor** shall use only those waste treatment, storage, and disposal facilities and waste transporters that possess the requisite license, permit or other governmental approval necessary to treat, store, dispose, or transport the waste, materials or hazardous substances.

5.8 Environmentally Preferable Purchasing. The **Contractor** shall ensure that products purchased or leased by the **Contractor** or any **Subcontractor** for the **Work** that are not specified by the **City** or are submitted as equivalents to a product specified by the **City** comply with the requirements of the New York City Environmentally Preferable Purchasing Program contained in Chapter 11 of Title 43 of the RCNY, pursuant to Chapter 3 of Title 6 of the Administrative Code.

ARTICLE 6. INSPECTION

6.1 During the progress of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall at all times afford the representatives of the **City** every reasonable, safe, and proper facility for inspecting all **Work** done or being done at the **Site** and also for inspecting the manufacture or preparation of materials and equipment at the place of such manufacture or preparation.

6.2 The **Contractor's** obligation hereunder shall include the uncovering or taking down of finished **Work** and its restoration thereafter; provided, however, that the order to uncover, take down and restore shall be in writing, and further provided that if **Work** thus exposed proves satisfactory, and if the **Contractor** has complied with Article 6.1, such uncovering or taking down and restoration shall be

considered an item of **Extra Work** to be paid for in accordance with the provisions of Article 26. If the **Work** thus exposed proves unsatisfactory, the **City** has no obligation to compensate the **Contractor** for the uncovering, taking down or restoration.

6.3 Inspection and approval by the **Commissioner**, the **Engineer**, **Project Manager**, or **Resident Engineer**, of finished **Work** or of **Work** being performed, or of materials and equipment at the place of manufacture or preparation, shall not relieve the **Contractor** of its obligation to perform the **Work** in strict accordance with the **Contract**. Finished or unfinished **Work** not found to be in strict accordance with the **Contract** shall be replaced as directed by the **Engineer**, even though such **Work** may have been previously approved and paid for. Such corrective **Work** is **Contract Work** and shall not be deemed **Extra Work**.

6.4 Rejected **Work** and materials shall be promptly taken down and removed from the **Site**, which must at all times be kept in a reasonably clean and neat condition.

ARTICLE 7. PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION

7.1 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall be under an absolute obligation to protect the finished and unfinished **Work** against any damage, loss, injury, theft and/or vandalism and in the event of such damage, loss, injury, theft and/or vandalism, it shall promptly replace and/or repair such **Work** at the **Contractor's** sole cost and expense, as directed by the **Resident Engineer**. The obligation to deliver finished **Work** in strict accordance with the **Contract** prior to **Final Acceptance** shall be absolute and shall not be affected by the **Resident Engineer's** approval of, or failure to prohibit, the **Means and Methods of Construction** used by the **Contractor**.

7.2 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall take all reasonable precautions to protect all persons and the property of the **City** and of others from damage, loss or injury resulting from the **Contractor's**, and/or its **Subcontractors'** operations under this **Contract**. The **Contractor's** obligation to protect shall include the duty to provide, place or replace, and adequately maintain at or about the **Site** suitable and sufficient protection such as lights, barricades, and enclosures.

7.3 The **Contractor** shall comply with the notification requirements set forth below in the event of any loss, damage or injury to **Work**, persons or property, or any accidents arising out of the operations of the **Contractor** and/or its **Subcontractors** under this **Contract**.

7.3.1 The **Contractor** shall make a full and complete report in writing to the **Resident Engineer** within three (3) **Days** after the occurrence.

7.3.2 The **Contractor** shall also send written notice of any such event to all insurance carriers that issued potentially responsive policies (including commercial general liability insurance carriers for events relating to the **Contractor's** own employees) no later than twenty (20) days after such event and again no later than twenty (20) days after the initiation of any claim and/or action resulting therefrom. Such notice shall contain the following information: the number of the insurance policy, the name of the Named Insured, the date and location of the incident, and the identity of the persons injured or property damaged. For any policy on which the **City** and/or the **Engineer**, **Architect**, or **Project Manager** are Additional Insureds, such notice shall expressly specify that "this notice is

being given on behalf of the City of New York as Additional Insured, such other Additional Insureds, as well as the Named Insured.”

7.3.2(a) Whenever such notice is sent under a policy on which the **City** is an Additional Insured, the **Contractor** shall provide copies of the notice to the **Comptroller**, the **Commissioner** and the **City** Corporation Counsel. The copy to the **Comptroller** shall be sent to the Insurance Unit, NYC Comptroller’s Office, 1 Centre Street – Room 1222, New York, New York, 10007. The copy to the **Commissioner** shall be sent to the address set forth in Schedule A of the General Conditions. The copy to the **City** Corporation Counsel shall be sent to Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

7.3.2(b) If the **Contractor** fails to provide any of the foregoing notices to any appropriate insurance carrier(s) in a timely and complete manner, the **Contractor** shall indemnify the **City** for all losses, judgments, settlements, and expenses, including reasonable attorneys’ fees, arising from an insurer’s disclaimer of coverage citing late notice by or on behalf of the **City**.

7.4 To the fullest extent permitted by law, the **Contractor** shall defend, indemnify, and hold the **City**, its employees, and officials (the “Indemnitees”) harmless against any and all claims (including but not limited to claims asserted by any employee of the **Contractor** and/or its **Subcontractors**) and costs and expenses of whatever kind (including but not limited to payment or reimbursement of attorneys’ fees and disbursements) allegedly arising out of or in any way related to the operations of the **Contractor** and/or its **Subcontractors** in the performance of this **Contract** or from the **Contractor**’s and/or its **Subcontractors**’ failure to comply with any of the provisions of this **Contract** or of the **Law**. Such costs and expenses shall include all those incurred in defending the underlying claim and those incurred in connection with the enforcement of this Article 7.4 by way of cross-claim, third-party claim, declaratory action or otherwise. The parties expressly agree that the indemnification obligation hereunder contemplates (1) full indemnity in the event of liability imposed against the Indemnitees without negligence and solely by reason of statute, operation of **Law** or otherwise; and (2) partial indemnity in the event of any actual negligence on the part of the Indemnitees either causing or contributing to the underlying claim (in which case, indemnification will be limited to any liability imposed over and above that percentage attributable to actual fault whether by statute, by operation of **Law**, or otherwise). Where partial indemnity is provided hereunder, all costs and expenses shall be indemnified on a pro rata basis.

7.4.1 Indemnification under Article 7.4 or any other provision of the **Contract** shall operate whether or not **Contractor** or its **Subcontractors** have placed and maintained the insurance specified under Article 22.

7.5 The provisions of this Article 7 shall not be deemed to create any new right of action in favor of third parties against the **Contractor** or the **City**.

CHAPTER III: TIME PROVISIONS

ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK

8.1 The **Contractor** shall commence the **Work** on the date specified in the **Notice to Proceed** or the **Order to Work**. The time for performance of the **Work** under the **Contract** shall be computed from

the date specified in the **Notice to Proceed** or the **Order to Work**. **TIME BEING OF THE ESSENCE** to the **City**, the **Contractor** shall thereafter prosecute the **Work** diligently, using such **Means and Methods of Construction** as are in accord with Article 4 herein and as will assure its completion not later than the date specified in this Contract, or on the date to which the time for completion may be extended.

ARTICLE 9. PROGRESS SCHEDULES

9.1 To enable the **Work** to be performed in an orderly and expeditious manner, the **Contractor**, within fifteen (15) **Days** after the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Engineer**, shall submit to the **Engineer** a proposed progress schedule based on the Critical Path Method in the form of a bar graph or in such other form as specified by the **Engineer**, and monthly cash flow requirements, showing:

9.1.1 The anticipated time of commencement and completion of each of the various operations to be performed under this **Contract**; and

9.1.2 The sequence and interrelation of each of these operations with the others and with those of other related contracts; and

9.1.3 The estimated time required for fabrication or delivery, or both, of all materials and equipment required for the **Work**, including the anticipated time for obtaining required approvals pursuant to Article 10; and

9.1.4 The estimated amount in dollars the **Contractor** will claim on a monthly basis.

9.2 The proposed schedule shall be revised as directed by the **Engineer**, until finally approved by the **Engineer**, and after such approval, subject to the provisions of Article 11, shall be strictly adhered to by the **Contractor**.

9.3 If the **Contractor** shall fail to adhere to the approved progress schedule, or to the schedule as revised pursuant to Article 11, it shall promptly adopt such other or additional **Means and Methods of Construction**, at its sole cost and expense, as will make up for the time lost and will assure completion in accordance with the approved progress schedule. The approval by the **City** of a progress schedule which is shorter than the time allotted under the **Contract** shall not create any liability for the **City** if the approved progress schedule is not met.

9.4 The **Contractor** will not receive any payments until the proposed progress schedule is submitted.

ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL

10.1 From time to time as the **Work** progresses and in the sequence indicated by the approved progress schedule, the **Contractor** shall submit to the **Engineer** a specific request in writing for each item of information or approval required by the **Contractor**. These requests shall state the latest date upon which the information or approval is actually required by the **Contractor**, and shall be submitted in a reasonable time in advance thereof to provide the **Engineer** a sufficient time to act upon such submissions, or any necessary re-submissions thereof.

10.2 The **Contractor** shall not have any right to an extension of time on account of delays due to the **Contractor's** failure to submit requests for the required information or the required approval in accordance with the above requirements.

ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY

11.1 After the commencement of any condition which is causing or may cause a delay in completion of the **Work**, including conditions for which the **Contractor** may be entitled to an extension of time, the following notifications and submittals are required:

11.1.1 Within fifteen (15) **Days** after the **Contractor** becomes aware or reasonably should be aware of each such condition, the **Contractor** must notify the **Resident Engineer or Engineer**, as directed by the **Commissioner**, in writing of the existence, nature and effect of such condition upon the approved progress schedule and the **Work**, and must state why and in what respects, if any, the condition is causing or may cause a delay. Such notice shall include a description of the construction activities that are or could be affected by the condition and may include any recommendations the **Contractor** may have to address the delay condition and any activities the **Contractor** may take to avoid or minimize the delay.

11.1.2 If the **Contractor** shall claim to be sustaining damages for delay as provided for in this Article 11, within forty-five (45) **Days** from the time such damages are first incurred for each such condition, the **Contractor** shall submit to the **Commissioner** a verified written statement of the details and estimates of the amounts of such damages, including categories of expected damages and projected monthly costs, together with documentary evidence of such damages as the **Contractor** may have at the time of submission ("statement of delay damages"), as further detailed in Article 11.6. The **Contractor** may submit the above statement within such additional time as may be granted by the **Commissioner** in writing upon written request therefor.

11.1.3 Articles 11.1.1 and 11.1.2 do not relieve the **Contractor** of its obligation to comply with the provisions of Article 44.

11.2 Failure of the **Contractor** to strictly comply with the requirements of Article 11.1.1 may, in the discretion of the **Commissioner**, be deemed sufficient cause to deny any extension of time on account of delay arising out of such condition. Failure of the **Contractor** to strictly comply with the requirements of both Articles 11.1.1 and 11.1.2 shall be deemed a conclusive waiver by the **Contractor** of any and all claims for damages for delay arising from such condition and no right to recover on such claims shall exist.

11.3 When appropriate and directed by the **Engineer**, the progress schedule shall be revised by the **Contractor** until finally approved by the **Engineer**. The revised progress schedule must be strictly adhered to by the **Contractor**.

11.4 **Compensable Delays**

11.4.1 The **Contractor** agrees to make claim only for additional costs attributable to delay in the performance of this **Contract** necessarily extending the time for completion of the **Work** or resulting from acceleration directed by the **Commissioner** and required to maintain the progress schedule, occasioned solely by any act or omission to act of the **City** listed below. The **Contractor** also agrees that delay from any other cause shall be

compensated, if at all, solely by an extension of time to complete the performance of the **Work**.

- 11.4.1.1 The failure of the **City** to take reasonable measures to coordinate and progress the **Work** to the extent required by the **Contract**, except that the **City** shall not be responsible for the **Contractor's** obligation to coordinate and progress the **Work** of its **Subcontractors**.
- 11.4.1.2 Unreasonable delays attributable to the review of shop drawings, the issuance of change orders, or the cumulative impact of change orders that were not brought about by any act or omission of the **Contractor**.
- 11.4.1.3 The unavailability of the **Site** caused by acts or omissions of the **City**.
- 11.4.1.4 The issuance by the **Engineer** of a stop work order that was not brought about through any act or omission of the **Contractor**.
- 11.4.1.5 Differing site conditions or environmental hazards that were neither known nor reasonably ascertainable on a pre-bid inspection of the **Site** or review of the bid documents or other publicly available sources, and that are not ordinarily encountered in the **Project's** geographical area or neighborhood or in the type of **Work** to be performed.
- 11.4.1.6 Delays caused by the **City's** bad faith or its willful, malicious, or grossly negligent conduct;
- 11.4.1.7 Delays not contemplated by the parties;
- 11.4.1.8 Delays so unreasonable that they constitute an intentional abandonment of the **Contract** by the **City**; and
- 11.4.1.9 Delays resulting from the **City's** breach of a fundamental obligation of the **Contract**.

11.4.2 No claim may be made for any alleged delay in **Substantial Completion** of the **Work** if the **Work** will be or is substantially completed by the date of **Substantial Completion** provided for in Schedule A unless acceleration has been directed by the **Commissioner** to meet the date of **Substantial Completion** set forth in Schedule A, or unless there is a provision in the **Contract** providing for additional compensation for early completion.

11.4.3 The provisions of this Article 11 apply only to claims for additional costs attributable to delay and do not preclude determinations by the **Commissioner** allowing reimbursements for additional costs for **Extra Work** pursuant to Articles 25 and 26 of this **Contract**. To the extent that any cost attributable to delay is reimbursed as part of a change order, no additional claim for compensation under this Article 11 shall be allowed.

11.5 Non-Compensable Delays. The **Contractor** agrees to make no claim for, and is deemed to have included in its bid prices for the various items of the **Contract**, the extra/additional costs attributable to any delays caused by or attributable to the items set forth below. For such items, the **Contractor** shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**, in accordance with the provisions of Article 13. Such extensions of time will be granted, if at all, pursuant to the grounds set forth in Article 13.3.

11.5.1 The acts or omissions of any third parties, including but not limited to **Other Contractors**, public/ governmental bodies (other than **City Agencies**), utilities or private enterprises, who are disclosed in the **Contract Documents** or are ordinarily encountered or generally recognized as related to the **Work**;

11.5.2 Any situation which was within the contemplation of the parties at the time of entering into the **Contract**, including any delay indicated or disclosed in the **Contract Documents** or that would be generally recognized by a reasonably prudent contractor as related to the nature of the **Work**, and/or the existence of any facility or appurtenance owned, operated or maintained by any third party, as indicated or disclosed in the **Contract Documents** or ordinarily encountered or generally recognized as related to the nature of the **Work**;

11.5.3 Restraining orders, injunctions or judgments issued by a court which were caused by a Contractor's submission, action or inaction or by a Contractor's **Means and Methods of Construction**, or by third parties, unless such order, injunction or judgment was the result of an act or omission by the **City**;

11.5.4 Any labor boycott, strike, picketing, lockout or similar situation;

11.5.5 Any shortages of supplies or materials, or unavailability of equipment, required by the **Contract Work**;

11.5.6 Climatic conditions, storms, floods, droughts, tidal waves, fires, hurricanes, earthquakes, landslides or other catastrophes or acts of God, or acts of war or of the public enemy or terrorist acts, including the **City's** reasonable responses thereto; and

11.5.7 **Extra Work** which does not significantly affect the overall completion of the **Contract**, reasonable delays in the review or issuance of change orders or field orders and/or in shop drawing reviews or approvals.

11.6 Required Content of Submission of Statement of Delay Damages

11.6.1 In the verified written statement of delay damages required by Article 11.1.2, the following information shall be provided by the **Contractor**:

11.6.1.1 For each delay, the start and end dates of the claimed periods of delay and, in addition, a description of the operations that were delayed, an explanation of how they were delayed, and the reasons for the delay, including identifying the applicable act or omission of the **City** listed in Article 11.4.

11.6.1.2 A detailed factual statement of the claim providing all necessary dates, locations and items of **Work** affected by the claim.

11.6.1.3 The estimated amount of additional compensation sought and a breakdown of that amount into categories as described in Article 11.7.

11.6.1.4 Any additional information requested by the **Commissioner**.

11.7 Recoverable Costs

11.7.1 Delay damages may be recoverable for the following costs actually and necessarily incurred in the performance of the **Work**:

11.7.1.1 Direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits, based on time and materials records;

11.7.1.2 Necessary materials (including transportation to the **Site**), based on time and material records;

- 11.7.1.3 Reasonable rental value of necessary plant and equipment other than small tools, plus fuel/energy costs according to the applicable formula set forth in Articles 26.2.4 and/or 26.2.8, based on time and material records;
- 11.7.1.4 Additional insurance and bond costs;
- 11.7.1.5 Extended **Site** overhead, field office rental, salaries of field office staff, on-site project managers and superintendents, field office staff vehicles, **Project**-specific storage, field office utilities and telephone, and field office consumables;
- 11.7.1.6 Labor escalation costs based on actual costs;
- 11.7.1.7 Materials and equipment escalation costs based on applicable industry indices unless documentation of actual increased cost is provided;
- 11.7.1.8 Additional material and equipment storage costs based on actual documented costs and additional costs necessitated by extended manufacturer warranty periods; and
- 11.7.1.9 Extended home office overhead calculated based on the following formula:
 - (1) Subtract from the original **Contract** amount the amount earned by original contractual **Substantial Completion** date (not including change orders);
 - (2) Remove 15% overhead and profit from the calculation in item (1) by dividing the results of item (1) by 1.15;
 - (3) Multiply the result of item (2) by 7.25% for the total home office overhead;
 - (4) Multiply the result of item (3) by 7.25% for the total profit; and
 - (5) The total extended home office overhead will be the total of items (3) and (4).

11.7.2 Recoverable Subcontractor Costs. When the **Work** is performed by a **Subcontractor**, the **Contractor** may be paid the actual and necessary costs of such subcontracted **Work** as outlined above in Articles 11.7.1.1 through 11.7.1.8, and an additional overhead of 5% of the costs outlined in Articles 11.7.1.1 through 11.7.1.3.

11.7.3 Non-Recoverable Costs. The parties agree that the **City** will have no liability for the following items and the **Contractor** agrees it shall make no claim for the following items:

- 11.7.3.1 Profit, or loss of anticipated or unanticipated profit, except as provided in Article 11.7.1.9;
- 11.7.3.2 Consequential damages, including, but not limited to, construction or bridge loans or interest paid on such loans, loss of bonding capacity, bidding opportunities, or interest in investment, or any resulting insolvency;
- 11.7.3.3 Indirect costs or expenses of any nature except those included in Article 11.7.1;
- 11.7.3.4 Direct or indirect costs attributable to performance of **Work** where the **Contractor**, because of situations or conditions within its control, has not progressed the **Work** in a satisfactory manner; and
- 11.7.3.5 Attorneys' fees and dispute and claims preparation expenses.

- 11.8 Any claims for delay under this Article 11 are not subject to the jurisdiction of the Contract Dispute Resolution Board pursuant to the dispute resolution process set forth in Article 27.
- 11.9 Any compensation provided to the **Contractor** in accordance with this Article 11 will be made pursuant to a claim filed with the **Comptroller**. Nothing in this Article 11 extends the time for the **Contractor** to file an action with respect to a claim within six months after **Substantial Completion** pursuant to Article 56.

ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS

12.1 During the progress of the **Work**, **Other Contractors** may be engaged in performing other work or may be awarded other contracts for additional work on this **Project**. In that event, the **Contractor** shall coordinate the **Work** to be done hereunder with the work of such **Other Contractors** and the **Contractor** shall fully cooperate with such **Other Contractors** and carefully fit its own **Work** to that provided under other contracts as may be directed by the **Engineer**. The **Contractor** shall not commit or permit any act which will interfere with the performance of work by any **Other Contractors**.

12.2 If the **Engineer** determines that the **Contractor** is failing to coordinate its **Work** with the work of **Other Contractors** as the **Engineer** has directed, then the **Commissioner** shall have the right to withhold any payments otherwise due hereunder until the **Contractor** completely complies with the **Engineer's** directions.

12.3 The **Contractor** shall notify the **Engineer** in writing if any **Other Contractor** on this **Project** is failing to coordinate its work with the **Work** of this **Contract**. If the **Engineer** finds such charges to be true, the **Engineer** shall promptly issue such directions to the **Other Contractor** with respect thereto as the situation may require. The **City** shall not, however, be liable for any damages suffered by any **Other Contractor's** failure to coordinate its work with the **Work** of this **Contract** or by reason of the **Other Contractor's** failure to promptly comply with the directions so issued by the **Engineer**, or by reason of any **Other Contractor's** default in performance, it being understood that the **City** does not guarantee the responsibility or continued efficiency of any contractor. The **Contractor** agrees to make no claim against the **City** for any damages relating to or arising out of any directions issued by the **Engineer** pursuant to this Article 12 (including but not limited to the failure of any **Other Contractor** to comply or promptly comply with such directions), or the failure of any **Other Contractor** to coordinate its work, or the default in performance of any **Other Contractor**.

12.4 The **Contractor** shall indemnify and hold the **City** harmless from any and all claims or judgments for damages and from costs and expenses to which the **City** may be subjected or which it may suffer or incur by reason of the **Contractor's** failure to comply with the **Engineer's** directions promptly; and the **Comptroller** shall have the right to exercise the powers reserved in Article 23 with respect to any claims which may be made for damages due to the **Contractor's** failure to comply with the **Engineer's** directions promptly. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.5 Should the **Contractor** sustain any damage through any act or omission of any **Other Contractor** having a contract with the **City** for the performance of work upon the **Site** or of work which may be necessary to be performed for the proper prosecution of the **Work** to be performed hereunder, or through any act or omission of a subcontractor of such **Other Contractor**, the **Contractor** shall have no claim against the **City** for such damage, but shall have a right to recover such damage from the **Other**

Contractor under the provision similar to the following provisions which apply to this **Contract** and have been or will be inserted in the contracts with such **Other Contractors**:

12.5.1 Should any **Other Contractor** having or who shall hereafter have a contract with the **City** for the performance of work upon the **Site** sustain any damage through any act or omission of the **Contractor** hereunder or through any act or omission of any **Subcontractor** of the **Contractor**, the **Contractor** agrees to reimburse such **Other Contractor** for all such damages and to defend at its own expense any action based upon such claim and if any judgment or claim (even if the allegations of the action are without merit) against the **City** shall be allowed the **Contractor** shall pay or satisfy such judgment or claim and pay all costs and expenses in connection therewith and agrees to indemnify and hold the **City** harmless from all such claims. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.6 The **City's** right to indemnification hereunder shall in no way be diminished, waived or discharged by its recourse to assessment of liquidated damages as provided in Article 15, or by the exercise of any other remedy provided for by **Contract** or by **Law**.

ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE

13.1 If performance by the **Contractor** is delayed for a reason set forth in Article 13.3, the **Contractor** may be allowed a reasonable extension of time in conformance with this Article 13 and the **PPB Rules**.

13.2 Any extension of time may be granted only by the **ACCO** or by the Board for the Extension of Time (hereafter "Board") (as set forth below) upon written application by the **Contractor**.

13.3 Grounds for Extension: If such application is made, the **Contractor** shall be entitled to an extension of time for delay in completion of the **Work** caused solely:

13.3.1 By the acts or omissions of the **City**, its officials, agents or employees; or

13.3.2 By the act or omissions of **Other Contractors** on this **Project**; or

13.3.3 By supervening conditions entirely beyond the control of either party hereto (such as, but not limited to, acts of God or the public enemy, excessive inclement weather, war or other national emergency making performance temporarily impossible or illegal, or strikes or labor disputes not brought about by any act or omission of the **Contractor**).

13.3.4 The **Contractor** shall, however, be entitled to an extension of time for such causes only for the number of **Days** of delay which the **ACCO** or the Board may determine to be due solely to such causes, and then only if the **Contractor** shall have strictly complied with all of the requirements of Articles 9 and 10.

13.4 The **Contractor** shall not be entitled to receive a separate extension of time for each of several causes of delay operating concurrently, but, if at all, only for the actual period of delay in completion of the **Work** as determined by the **ACCO** or the Board, irrespective of the number of causes contributing to produce such delay. If one of several causes of delay operating concurrently results from any act, fault or omission of the **Contractor** or of its **Subcontractors** or **Materialmen**, and would of itself (irrespective

of the concurrent causes) have delayed the **Work**, no extension of time will be allowed for the period of delay resulting from such act, fault or omission.

13.5 The determination made by the **ACCO** or the Board on an application for an extension of time shall be binding and conclusive on the **Contractor**.

13.6 The **ACCO** or the Board acting entirely within their discretion may grant an application for an extension of time for causes of delay other than those herein referred.

13.7 Permitting the **Contractor** to continue with the **Work** after the time fixed for its completion has expired, or after the time to which such completion may have been extended has expired, or the making of any payment to the **Contractor** after such time, shall in no way operate as a waiver on the part of the **City** of any of its rights under this **Contract**.

13.8 Application for Extension of Time:

13.8.1 Before the **Contractor's** time extension request will be considered, the **Contractor** shall notify the **ACCO** of the condition which allegedly has caused or is causing the delay, and shall submit a written application to the **ACCO** identifying:

13.8.1(a) The **Contractor**; the registration number; and **Project** description;

13.8.1(b) Liquidated damage assessment rate, as specified in the **Contract**;

13.8.1(c) Original total bid price;

13.8.1(d) The original **Contract** start date and completion date;

13.8.1(e) Any previous time extensions granted (number and duration); and

13.8.1(f) The extension of time requested.

13.8.2 In addition, the application for extension of time shall set forth in detail:

13.8.2(a) The nature of each alleged cause of delay in completing the **Work**;

13.8.2(b) The date upon which each such cause of delay began and ended and the number of **Days** attributable to each such cause;

13.8.2(c) A statement that the **Contractor** waives all claims except for those delineated in the application, and the particulars of any claims which the **Contractor** does not agree to waive. For time extensions for **Substantial Completion** and final completion payments, the application shall include a detailed statement of the dollar amounts of each element of claim item reserved; and

13.8.2(d) A statement indicating the **Contractor's** understanding that the time extension is granted only for purposes of permitting continuation of **Contract** performance and payment for **Work** performed and that the **City** retains its right to conduct an investigation and assess liquidated damages as appropriate in the future.

13.9 Analysis and Approval of Time Extensions:

13.9.1 For time extensions for partial payments, a written determination shall be made by the **ACCO** who may, for good and sufficient cause, extend the time for the performance of the **Contract** as follows:

13.9.1(a) If the **Work** is to be completed within six (6) months, the time for performance may be extended for sixty (60) **Days**;

13.9.1(b) If the **Work** is to be completed within less than one (1) year but more than six (6) months, an extension of ninety (90) **Days** may be granted;

13.9.1(c) If the **Contract** period exceeds one (1) year, besides the extension granted in Article 13.9.1(b), an additional thirty (30) **Days** may be granted for each multiple of six (6) months involved beyond the one (1) year period; or

13.9.1(d) If exceptional circumstances exist, the **ACCO** may extend the time for performance beyond the extensions in Articles 13.9.1(a), 13.9.1(b), and 13.9.1(c). In that event, the **ACCO** shall file with the Mayor's Office of Contract Services a written explanation of the exceptional circumstances.

13.9.2 For extensions of time for **Substantial Completion** and final completion payments, the **Engineer**, in consultation with the **ACCO**, shall prepare a written analysis of the delay (including a preliminary determination of the causes of delay, the beginning and end dates for each such cause of delay, and whether the delays are excusable under the terms of this **Contract**). The report shall be subject to review by and approval of the Board, which shall have authority to question its analysis and determinations and request additional facts or documentation. The report as reviewed and made final by the Board shall be made a part of the **Agency** contract file. Neither the report itself nor anything contained therein shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

13.9.3 Approval Mechanism for Time Extensions for **Substantial Completion** or Final Completion Payments: An extension shall be granted only with the approval of the Board which is comprised of the **ACCO** of the **Agency**, the **City** Corporation Counsel, and the **Comptroller**, or their authorized representatives.

13.9.4 Neither the granting of any application for an extension of time to the **Contractor** or any **Other Contractor** on this **Project** nor the papers, records or reports related to any application for or grant of an extension of time or determination related thereto shall be referred to or offered in evidence by the **Contractor** or its attorneys in any action or proceeding.

13.10 No Damage for Delay: The **Contractor** agrees to make no claim for damages for delay in the performance of this **Contract** occasioned by any act or omission to act of the **City** or any of its representatives, except as provided for in Article 11.

ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK

14.1 Date for **Substantial Completion**: The **Contractor** shall substantially complete the **Work** within the time fixed in Schedule A of the General Conditions, or within the time to which such **Substantial Completion** may be extended.

14.2 Determining the Date of **Substantial Completion**: The **Work** will be deemed to be substantially complete when the two conditions set forth below have been met.

14.2.1 Inspection: The **Engineer** or **Resident Engineer**, as applicable, has inspected the **Work** and has made a written determination that it is substantially complete.

14.2.2 Approval of **Final Approved Punch List** and Date for **Final Acceptance**: Following inspection of the **Work**, the **Engineer/Resident Engineer** shall furnish the **Contractor** with a final punch list, specifying all items of **Work** to be completed and proposing dates for the completion of each specified item of **Work**. The **Contractor** shall then submit in writing to the **Engineer/Resident Engineer** within ten (10) **Days** of the **Engineer/Resident Engineer** furnishing the final punch list either acceptance of the dates or proposed alternative dates for the completion of each specified item of **Work**. If the **Contractor** neither accepts the dates nor proposes alternative dates within ten (10) **Days**, the schedule proposed by the **Engineer/Resident Engineer** shall be deemed accepted. If the **Contractor** proposes alternative dates, then, within a reasonable time after receipt, the **Engineer/Resident Engineer**, in a written notification to the **Contractor**, shall approve the **Contractor's** completion dates or, if they are unable to agree, the **Engineer/Resident Engineer** shall establish dates for the completion of each item of **Work**. The latest completion date specified shall be the date for **Final Acceptance** of the **Work**.

14.3 Date of **Substantial Completion**. The date of approval of the **Final Approved Punch List**, shall be the date of **Substantial Completion**. The date of approval of the **Final Approved Punch List** shall be either (a) if the **Contractor** approves the final punch list and proposed dates for completion furnished by the **Engineer/Resident Engineer**, the date of the **Contractor's** approval; or (b) if the **Contractor** neither accepts the dates nor proposes alternative dates, ten (10) **Days** after the **Engineer/Resident Engineer** furnishes the **Contractor** with a final punch list and proposed dates for completion; or (c) if the **Contractor** proposes alternative dates, the date that the **Engineer/Resident Engineer** sends written notification to the **Contractor** either approving the **Contractor's** proposed alternative dates or establishing dates for the completion for each item of **Work**.

14.4 Determining the Date of **Final Acceptance**: The **Work** will be accepted as final and complete as of the date of the **Engineer's/Resident Engineer's** inspection if, upon such inspection, the **Engineer/Resident Engineer** finds that all items on the **Final Approved Punch List** are complete and no further **Work** remains to be done. The **Commissioner** will then issue a written determination of **Final Acceptance**.

14.5 Request for Inspection: Inspection of the **Work** by the **Engineer/Resident Engineer** for the purpose of **Substantial Completion** or **Final Acceptance** shall be made within fourteen (14) **Days** after receipt of the **Contractor's** written request therefor.

14.6 Request for Re-inspection: If upon inspection for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer/Resident Engineer** determines that there are items of **Work** still to be performed, the **Contractor** shall promptly perform them and then request a re-inspection. If upon re-inspection, the **Engineer/Resident Engineer** determines that the **Work** is substantially complete or finally accepted, the date of such re-inspection shall be the date of **Substantial Completion** or **Final Acceptance**. Re-inspection by the **Engineer/Resident Engineer** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.7 Initiation of Inspection by the **Engineer/Resident Engineer**: If the **Contractor** does not request inspection or re-inspection of the **Work** for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer/Resident Engineer** may initiate such inspection or re-inspection.

ARTICLE 15. LIQUIDATED DAMAGES

15.1 In the event the **Contractor** fails to substantially complete the **Work** within the time fixed for such **Substantial Completion** in Schedule A of the General Conditions, plus authorized time extensions, or if the **Contractor**, in the sole determination of the **Commissioner**, has abandoned the **Work**, the **Contractor** shall pay to the **City** the sum fixed in Schedule A of the General Conditions, for each and every **Day** that the time consumed in substantially completing the **Work** exceeds the time allowed therefor; which said sum, in view of the difficulty of accurately ascertaining the loss which the **City** will suffer by reason of delay in the **Substantial Completion** of the **Work** hereunder, is hereby fixed and agreed as the liquidated damages that the **City** will suffer by reason of such delay, and not as a penalty. This Article 15 shall also apply to the **Contractor** whether or not the **Contractor** is defaulted pursuant to Chapter X of this **Contract**. Neither the failure to assess liquidated damages nor the granting of any time extension shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

15.2 Liquidated damages received hereunder are not intended to be nor shall they be treated as either a partial or full waiver or discharge of the **City's** right to indemnification, or the **Contractor's** obligation to indemnify the **City**, or to any other remedy provided for in this **Contract** or by **Law**.

15.3 The **Commissioner** may deduct and retain out of the monies which may become due hereunder, the amount of any such liquidated damages; and in case the amount which may become due hereunder shall be less than the amount of liquidated damages suffered by the **City**, the **Contractor** shall be liable to pay the difference.

ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION

16.1 Unless otherwise provided for in the **Specifications**, the **Commissioner** may take over, use, occupy or operate any part of the **Work** at any time prior to **Final Acceptance**, upon written notification to the **Contractor**. The **Engineer** or **Resident Engineer**, as applicable, shall inspect the part of the **Work** to be taken over, used, occupied, or operated, and will furnish the **Contractor** with a written statement of the **Work**, if any, which remains to be performed on such part. The **Contractor** shall not object to, nor interfere with, the **Commissioner's** decision to exercise the rights granted by Article 16. In the event the **Commissioner** takes over, uses, occupies, or operates any part of the **Work**:

16.1.1 the **Engineer/Resident Engineer** shall issue a written determination of **Substantial Completion** with respect to such part of the **Work**;

16.1.2 the **Contractor** shall be relieved of its absolute obligation to protect such part of the unfinished **Work** in accordance with Article 7;

16.1.3 the **Contractor's** guarantee on such part of the **Work** shall begin on the date of such use by the **City**; and;

16.1.4 the **Contractor** shall be entitled to a return of so much of the amount retained in accordance with Article 21 as it relates to such part of the **Work**, except so much thereof as may be retained under Articles 24 and 44.

CHAPTER IV: SUBCONTRACTS AND ASSIGNMENTS

ARTICLE 17. SUBCONTRACTS

17.1 The **Contractor** shall not make subcontracts totaling an amount more than the percentage of the total **Contract** price fixed in Schedule A of the General Conditions, without prior written permission from the **Commissioner**. All subcontracts made by the **Contractor** shall be in writing. No **Work** may be performed by a **Subcontractor** prior to the **Contractor** entering into a written subcontract with the **Subcontractor** and complying with the provisions of this Article 17.

17.2 Before making any subcontracts, the **Contractor** shall submit a written statement to the **Commissioner** giving the name and address of the proposed **Subcontractor**; the portion of the **Work** and materials which it is to perform and furnish; the cost of the subcontract; the VENDEX questionnaire if required; the proposed subcontract if requested by the **Commissioner**; and any other information tending to prove that the proposed **Subcontractor** has the necessary facilities, skill, integrity, past experience, and financial resources to perform the **Work** in accordance with the terms and conditions of this **Contract**.

17.3 In addition to the requirements in Article 17.2, **Contractor** is required to list the **Subcontractor** in the web based Subcontractor Reporting System through the City's Payee Information Portal (PIP), available at www.nyc.gov/pip.¹ For each **Subcontractor** listed, **Contractor** is required to provide the following information: maximum contract value, description of **Subcontractor's** Work, start and end date of the subcontract and identification of the **Subcontractor's** industry. Thereafter, **Contractor** will be required to report in the system the payments made to each **Subcontractor** within 30 days of making the payment. If any of the required information changes throughout the Term of the **Contract**, **Contractor** will be required to revise the information in the system.

Failure of the **Contractor** to list a **Subcontractor** and/or to report **Subcontractor** payments in a timely fashion may result in the **Commissioner** declaring the **Contractor** in default of the **Contract** and will subject **Contractor** to liquidated damages in the amount of \$100 per day for each day that the **Contractor** fails to identify a **Subcontractor** along with the required information about the **Subcontractor** and/or fails to report payments to a **Subcontractor**, beyond the time frames set forth herein or in the notice from the **City**. Article 15 shall govern the issue of liquidated damages.

17.4 If an approved **Subcontractor** elects to subcontract any portion of its subcontract, the proposed sub-subcontract shall be submitted in the same manner as directed above.

17.5 The **Commissioner** will notify the **Contractor** in writing whether the proposed **Subcontractor** is approved. If the proposed **Subcontractor** is not approved, the **Contractor** may submit another proposed **Subcontractor** unless the **Contractor** decides to do the **Work**. No **Subcontractor** shall be permitted to enter or perform any work on the **Site** unless approved.

17.6 Before entering into any subcontract hereunder, the **Contractor** shall provide the proposed **Subcontractor** with a complete copy of this document and inform the proposed **Subcontractor** fully and completely of all provisions and requirements of this **Contract** relating either directly or indirectly to the **Work** to be performed and the materials to be furnished under such subcontract, and every such

¹ In order to use the new system, a PIP account will be required. Detailed instructions on creating a PIP account and using the new system are also available at www.nyc.gov/pip. Additional assistance with PIP may be obtained by emailing the Financial Information Services Agency Help Desk at pip@fisa.nyc.gov.

Subcontractor shall expressly stipulate that all labor performed and materials furnished by the **Subcontractor** shall strictly comply with the requirements of this **Contract**.

17.7 Documents given to a prospective **Subcontractor** for the purpose of soliciting the **Subcontractor's** bid shall include either a copy of the bid cover or a separate information sheet setting forth the **Project** name, the **Contract** number (if available), the **Agency** (as noted in Article 2.1.6), and the **Project's** location.

17.8 The **Commissioner's** approval of a **Subcontractor** shall not relieve the **Contractor** of any of its responsibilities, duties, and liabilities hereunder. The **Contractor** shall be solely responsible to the **City** for the acts or defaults of its **Subcontractor** and of such **Subcontractor's** officers, agents, and employees, each of whom shall, for this purpose, be deemed to be the agent or employee of the **Contractor** to the extent of its subcontract.

17.9 If the **Subcontractor** fails to maintain the necessary facilities, skill, integrity, past experience, and financial resources (other than due to the **Contractor's** failure to make payments where required) to perform the **Work** in accordance with the terms and conditions of this **Contract**, the **Contractor** shall promptly notify the **Commissioner** and replace such **Subcontractor** with a newly approved **Subcontractor** in accordance with this Article 17.

17.10 The **Contractor** shall be responsible for ensuring that all **Subcontractors** performing **Work** at the **Site** maintain all insurance required by **Law**.

17.11 The **Contractor** shall promptly, upon request, file with the **Engineer** a conformed copy of the subcontract and its cost. The subcontract shall provide the following:

17.11.1 Payment to **Subcontractors**: The agreement between the **Contractor** and its **Subcontractor** shall contain the same terms and conditions as to method of payment for **Work**, labor, and materials, and as to retained percentages, as are contained in this **Contract**.

17.11.2 Prevailing Rate of Wages: The agreement between the **Contractor** and its **Subcontractor** shall include the prevailing wage rates and supplemental benefits to be paid in accordance with Labor Law Section 220.

17.11.3 Section 6-123 of the Administrative Code: Pursuant to the requirements of Section 6-123 of the Administrative Code, every agreement between the **Contractor** and a **Subcontractor** in excess of fifty thousand (\$50,000) dollars shall include a provision that the **Subcontractor** shall not engage in any unlawful discriminatory practice as defined in Title VIII of the Administrative Code (Section 8-101 *et seq.*).

17.11.4 All requirements required pursuant to federal and/or state grant agreement(s), if applicable to the **Work**.

17.12 The **Commissioner** may deduct from the amounts certified under this **Contract** to be due to the **Contractor**, the sum or sums due and owing from the **Contractor** to the **Subcontractors** according to the terms of the said subcontracts, and in case of dispute between the **Contractor** and its **Subcontractor**, or **Subcontractors**, as to the amount due and owing, the **Commissioner** may deduct and withhold from the amounts certified under this **Contract** to be due to the **Contractor** such sum or sums as may be claimed by such **Subcontractor**, or **Subcontractors**, in a sworn affidavit, to be due and owing until such time as such claim or claims shall have been finally resolved.

17.13 On contracts where performance bonds and payment bonds are executed, the **Contractor** shall include on each requisition for payment the following data: **Subcontractor's** name, value of the subcontract, total amount previously paid to **Subcontractor** for **Work** previously requisitioned, and the amount, including retainage, to be paid to the **Subcontractor** for **Work** included in the requisition.

17.14 On **Contracts** where performance bonds and payment bonds are not executed, the **Contractor** shall include with each requisition for payment submitted hereunder, a signed statement from each and every **Subcontractor** and/or **Materialman** for whom payment is requested in such requisition. Such signed statement shall be on the letterhead of the **Subcontractor** and/or **Materialman** for whom payment is requested and shall (i) verify that such **Subcontractor** and/or **Materialman** has been paid in full for all **Work** performed and/or material supplied to date, exclusive of any amount retained and any amount included on the current requisition, and (ii) state the total amount of retainage to date, exclusive of any amount retained on the current requisition.

ARTICLE 18. ASSIGNMENTS

18.1 The **Contractor** shall not assign, transfer, convey or otherwise dispose of this **Contract**, or the right to execute it, or the right, title or interest in or to it or any part thereof, or assign, by power of attorney or otherwise any of the monies due or to become due under this **Contract**, unless the previous written consent of the **Commissioner** shall first be obtained thereto, and the giving of any such consent to a particular assignment shall not dispense with the necessity of such consent to any further or other assignments.

18.2 Such assignment, transfer, conveyance or other disposition of this **Contract** shall not be valid until filed in the office of the **Commissioner** and the **Comptroller**, with the written consent of the **Commissioner** endorsed thereon or attached thereto.

18.3 Failure to obtain the previous written consent of the **Commissioner** to such an assignment, transfer, conveyance or other disposition, may result in the revocation and annulment of this **Contract**. The **City** shall thereupon be relieved and discharged from any further liability to the **Contractor**, its assignees, transferees or sublessees, who shall forfeit and lose all monies therefor earned under the **Contract**, except so much as may be required to pay the **Contractor's** employees.

18.4 The provisions of this clause shall not hinder, prevent, or affect an assignment by the **Contractor** for the benefit of its creditors made pursuant to the **Laws** of the State of New York.

18.5 This **Contract** may be assigned by the **City** to any corporation, agency or instrumentality having authority to accept such assignment.

CHAPTER V: CONTRACTOR'S SECURITY AND GUARANTEE

ARTICLE 19. SECURITY DEPOSIT

19.1 If performance and payment bonds are required, the **City** shall retain the bid security to ensure that the successful bidder executes the **Contract** and furnishes the required payment and performance security within ten (10) **Days** after notice of the award of the **Contract**. If the successful bidder fails to execute the **Contract** and furnish the required payment and performance security, the **City** shall retain such bid security as set forth in the Information for Bidders. If the successful bidder executes the

Contract and furnishes the required payment and performance security, the **City** shall return the bid security within a reasonable time after the furnishing of such bonds and execution of the **Contract** by the **City**.

19.2 If performance and payment bonds are not required, the bid security shall be retained by the **City** as security for the **Contractor's** faithful performance of the **Contract**. If partial payments are provided, the bid security will be returned to the **Contractor** after the sum retained under Article 21 equals the amount of the bid security, subject to other provisions of this **Contract**. If partial payments are not provided, the bid security will be released when final payment is certified by the **City** for payment.

19.3 If the **Contractor** is declared in default under Article 48 prior to the return of the deposit, or if any claim is made such as referred to in Article 23, the amount of such deposit, or so much thereof as the **Comptroller** may deem necessary, may be retained and then applied by the **Comptroller**:

19.3.1 To compensate the **City** for any expense, loss or damage suffered or incurred by reason of or resulting from such default, including the cost of re-letting and liquidated damages; or

19.3.2 To indemnify the **City** against any and all claims.

ARTICLE 20. PAYMENT GUARANTEE

20.1 On **Contracts** where one hundred (100%) percent performance bonds and payment bonds are executed, this Article 20 does not apply.

20.2 In the event the terms of this **Contract** do not require the **Contractor** to provide a payment bond or where the **Contract** does not require a payment bond for one hundred (100%) percent of the **Contract** price, the **City** shall, in accordance with the terms of this Article 20, guarantee payment of all lawful claims for:

20.2.1 Wages and compensation for labor performed and/or services rendered; and

20.2.2 Materials, equipment, and supplies provided, whether incorporated into the **Work** or not, when demands have been filed with the **City** as provided hereinafter by any person, firm, or corporation which furnished labor, material, equipment, supplies, or any combination thereof, in connection with the **Work** performed hereunder (hereinafter referred to as the "beneficiary") at the direction of the **City** or the **Contractor**.

20.3 The provisions of Article 20.2 are subject to the following limitations and conditions:

20.3.1 If the **Contractor** provides a payment bond for a value that is less than one hundred (100%) percent of the value of the **Contract Work**, the payment bond provided by the **Contractor** shall be primary (and non-contributing) to the payment guarantee provided under this Article 20.

20.3.2 The guarantee is made for the benefit of all beneficiaries as defined in Article 20.2 provided that those beneficiaries strictly adhere to the terms and conditions of Article 20.3.4 and 20.3.5.

20.3.3 Nothing in this Article 20 shall prevent a beneficiary providing labor, services or material for the **Work** from suing the **Contractor** for any amounts due and owing the beneficiary by the **Contractor**.

20.3.4 Every person who has furnished labor or material, to the **Contractor** or to a **Subcontractor** of the **Contractor**, in the prosecution of the **Work** and who has not been paid in full therefor before the expiration of a period of ninety (90) **Days** after the date on which the last of the labor was performed or material was furnished by him/her for which the claim is made, shall have the right to sue on this payment guarantee in his/her own name for the amount, or the balance thereof, unpaid at the time of commencement of the action; provided, however, that a person having a direct contractual relationship with a **Subcontractor** of the **Contractor** but no contractual relationship express or implied with the **Contractor** shall not have a right of action upon the guarantee unless he/she shall have given written notice to the **Contractor** within one hundred twenty (120) **Days** from the date on which the last of the labor was performed or the last of the material was furnished, for which his/her claim is made, stating with substantial accuracy the amount claimed and the name of the party to whom the material was furnished or for whom the labor was performed. The notice shall be served by delivering the same personally to the **Contractor** or by mailing the same by registered mail, postage prepaid, in an envelope addressed to the **Contractor** at any place where it maintains an office or conducts its business; provided, however, that where such notice is actually received by the **Contractor** by other means, such notice shall be deemed sufficient.

20.3.5 Except as provided in Labor Law Section 220-g, no action on this payment guarantee shall be commenced after the expiration of the one-year limitations period set forth in Section 137(4)(b) of the State Finance Law.

20.3.6 The **Contractor** shall promptly forward to the **City** any notice or demand received pursuant to Article 20.3.4. The **Contractor** shall inform the **City** of any defenses to the notice or demand and shall forward to the **City** any documents the **City** requests concerning the notice or demand.

20.3.7 All demands made against the **City** by a beneficiary of this payment guarantee shall be presented to the **Engineer** along with all written documentation concerning the demand which the **Engineer** deems reasonably appropriate or necessary, which may include, but shall not be limited to: the subcontract; any invoices presented to the **Contractor** for payment; the notarized statement of the beneficiary that the demand is due and payable, that a request for payment has been made of the **Contractor** and that the demand has not been paid by the **Contractor** within the time allowed for such payment by the subcontract; and copies of any correspondence between the beneficiary and the **Contractor** concerning such demand. The **City** shall notify the **Contractor** that a demand has been made. The **Contractor** shall inform the **City** of any defenses to the demand and shall forward to the **City** any documents the **City** requests concerning the demand.

20.3.8 The **City** shall make payment only if, after considering all defenses presented by the **Contractor**, it determines that the payment is due and owing to the beneficiary making the demand.

20.3.9 No beneficiary shall be entitled to interest from the **City**, or to any other costs, including, but not limited to, attorneys' fees, except to the extent required by State Finance Law Section 137.

20.4 Upon the receipt by the **City** of a demand pursuant to this Article 20, the **City** may withhold from any payment otherwise due and owing to the **Contractor** under this **Contract** an amount sufficient to satisfy the demand.

20.4.1 In the event the **City** determines that the demand is valid, the **City** shall notify the **Contractor** of such determination and the amount thereof and direct the **Contractor** to immediately pay such amount to the beneficiary. In the event the **Contractor**, within seven (7) **Days** of receipt of such notification from the **City**, fails to pay the beneficiary, such failure shall constitute an automatic and irrevocable assignment of payment by the **Contractor** to the beneficiary for the amount of the demand determined by the **City** to be valid. The **Contractor**, without further notification or other process, hereby gives its unconditional consent to such assignment of payment to the beneficiary and authorizes the **City**, on its behalf, to take all necessary actions to implement such assignment of payment, including without limitation the execution of any instrument or documentation necessary to effectuate such assignment.

20.4.2 In the event that the amount otherwise due and owing to the **Contractor** by the **City** is insufficient to satisfy such demand, the **City** may, at its option, require payment from the **Contractor** of an amount sufficient to cover such demand and exercise any other right to require or recover payment which the **City** may have under **Law** or **Contract**.

20.4.3 In the event the **City** determines that the demand is invalid, any amount withheld pending the **City's** review of such demand shall be paid to the **Contractor**; provided, however, no lien has been filed. In the event a claim or an action has been filed, the terms and conditions set forth in Article 23 shall apply. In the event a lien has been filed, the parties will be governed by the provisions of the Lien Law of the State of New York.

20.5 The provisions of this Article 20 shall not prevent the **City** and the **Contractor** from resolving disputes in accordance with the **PPB** Rules, where applicable.

20.6 In the event the **City** determines that the beneficiary is entitled to payment pursuant to this Article 20, such determination and any defenses and counterclaims raised by the **Contractor** shall be taken into account in evaluating the **Contractor's** performance.

20.7 Nothing in this Article 20 shall relieve the **Contractor** of the obligation to pay the claims of all persons with valid and lawful claims against the **Contractor** relating to the **Work**.

20.8 The **Contractor** shall not require any performance, payment or other bonds of any **Subcontractor** if this **Contract** does not require such bonds of the **Contractor**.

20.9 The payment guarantee made pursuant to this Article 20 shall be construed in a manner consistent with Section 137 of the State Finance Law and shall afford to persons furnishing labor or materials to the **Contractor** or its **Subcontractors** in the prosecution of the **Work** under this **Contract** all of the rights and remedies afforded to such persons by such section, including but not limited to, the right to commence an action against the **City** on the payment guarantee provided by this Article 20 within the one-year limitations period set forth in Section 137(4)(b).

ARTICLE 21. RETAINED PERCENTAGE

21.1 If this **Contract** requires one hundred (100%) percent performance and payment security, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and

retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.2 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded does not exceed one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.3 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded exceeds one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, up to ten (10%) percent of the value of **Work** certified for payment in each partial payment voucher. The percentage to be retained is set forth in Schedule A of the General Conditions.

ARTICLE 22. INSURANCE

22.1 Types of Insurance: The **Contractor** shall procure and maintain the following types of insurance if, and as indicated, in Schedule A of the General Conditions (with the minimum limits and special conditions specified in Schedule A). Such insurance shall be maintained from the date the **Contractor** is required to provide Proof of Insurance pursuant to Article 22.3.1 through the date of completion of all required **Work** (including punch list work as certified in writing by the **Resident Engineer**), except for insurance required pursuant to Article 22.1.4, which may terminate upon **Substantial Completion** of the **Contract**. All insurance shall meet the requirements set forth in this Article 22. Wherever this Article requires that insurance coverage be "at least as broad" as a specified form (including all ISO forms), there is no obligation that the form itself be used, provided that the **Contractor** can demonstrate that the alternative form or endorsement contained in its policy provides coverage at least as broad as the specified form.

22.1.1 Commercial General Liability Insurance: The **Contractor** shall provide Commercial General Liability Insurance covering claims for property damage and/or bodily injury, including death, which may arise from any of the operations under this **Contract**. Coverage under this insurance shall be at least as broad as that provided by the latest edition of Insurance Services Office ("ISO") Form CG 0001. Such insurance shall be "occurrence" based rather than "claims-made" and include, without limitation, the following types of coverage: premises operations; products and completed operations; contractual liability (including the tort liability of another assumed in a contract); broad form property damage; independent contractors; explosion, collapse and underground (XCU); construction means and methods; and incidental malpractice. Such insurance shall contain a "per project" aggregate limit, as specified in Schedule A, that applies separately to operations under this **Contract**.

22.1.1(a) Such Commercial General Liability Insurance shall name the **City** as an Additional Insured. Coverage for the **City** shall specifically include the **City's** officials and employees, be at least as broad as the latest edition of ISO Form CG 20 10 and provide completed operations coverage at least as broad as the latest edition of ISO Form CG 20 37.

22.1.1(b) Such Commercial General Liability Insurance shall name all other entities designated as additional insureds in Schedule A but only for claims arising from the

Contractor's operations under this **Contract**, with coverage at least as broad as the latest edition of ISO Form CG 20 26.

22.1.1(c) If the **Work** requires a permit from the Department of Buildings pursuant to 1 RCNY Section 101-08, the **Contractor** shall provide Commercial General Liability Insurance with limits of at least those required by 1 RCNY section 101-08 or greater limits required by the Agency in accordance with Schedule A. If the **Work** does not require such a permit, the minimum limits shall be those provided for in Schedule A.

22.1.1(d) If any of the **Work** includes repair of a waterborne vessel owned by or to be delivered to the **City**, such Commercial General Liability shall include, or be endorsed to include, Ship Repairer's Legal Liability Coverage to protect against, without limitation, liability arising from navigation of such vessels prior to delivery to and acceptance by the **City**.

22.1.2 Workers' Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance: The **Contractor** shall provide, and shall cause its **Subcontractors** to provide, Workers Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance in accordance with the **Laws** of the State of New York on behalf of all employees providing services under this **Contract** (except for those employees, if any, for which the **Laws** require insurance only pursuant to Article 22.1.3).

22.1.3 United States Longshoremen's and Harbor Workers Act and/or Jones Act Insurance: If specified in Schedule A of the General Conditions or if required by **Law**, the **Contractor** shall provide insurance in accordance with the United States Longshoremen's and Harbor Workers Act and/or the Jones Act, on behalf of all qualifying employees providing services under this **Contract**.

22.1.4 Builders Risk Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall provide Builders Risk Insurance on a completed value form for the total value of the **Work** through **Substantial Completion** of the **Work** in its entirety. Such insurance shall be provided on an All Risk basis and include coverage, without limitation, for windstorm (including named windstorm), storm surge, flood and earth movement. Unless waived by the **Commissioner**, it shall include coverage for ordinance and law, demolition and increased costs of construction, debris removal, pollutant clean up and removal, and expediting costs. Such insurance shall cover, without limitation, (a) all buildings and/or structures involved in the **Work**, as well as temporary structures at the **Site**, and (b) any property that is intended to become a permanent part of such building or structure, whether such property is on the **Site**, in transit or in temporary storage. Policies shall name the **Contractor** as Named Insured and list the **City** as both an Additional Insured and a Loss Payee as its interest may appear.

22.1.4(a) Policies of such insurance shall specify that, in the event a loss occurs at an occupied facility, occupancy of such facility is permitted without the consent of the issuing insurance company.

22.1.4(b) Such insurance may be provided through an Installation Floater, at the **Contractor's** option, if it otherwise conforms with the requirements of this Article 22.1.4.

22.1.5 Commercial Automobile Liability Insurance: The **Contractor** shall provide Commercial Automobile Liability Insurance for liability arising out of ownership,

maintenance or use of any owned (if any), non-owned and hired vehicles to be used in connection with this **Contract**. Coverage shall be at least as broad as the latest edition of ISO Form CA0001. If vehicles are used for transporting hazardous materials, the Automobile Liability Insurance shall be endorsed to provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90.

22.1.6 Contractors Pollution Liability Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Contractors Pollution Liability Insurance covering bodily injury and property damage. Such insurance shall provide coverage for actual, alleged or threatened emission, discharge, dispersal, seepage, release or escape of pollutants (including asbestos), including any loss, cost or expense incurred as a result of any cleanup of pollutants (including asbestos) or in the investigation, settlement or defense of any claim, action, or proceedings arising from the operations under this **Contract**. Such insurance shall be in the **Contractor's** name and list the **City** as an Additional Insured and any other entity specified in Schedule A. Coverage shall include, without limitation, (a) loss of use of damaged property or of property that has not been physically injured, (b) transportation, and (c) non-owned disposal sites.

22.1.6(a) Coverage for the **City** as Additional Insured shall specifically include the **City's** officials and employees and be at least as broad as provided to the **Contractor** for this **Project**.

22.1.6(b) If such insurance is written on a claims-made policy, such policy shall have a retroactive date on or before the effective date of this **Contract**, and continuous coverage shall be maintained, or an extended discovery period exercised, for a period of not less than three (3) years from the time the **Work** under this **Contract** is completed.

22.1.7 Marine Insurance:

22.1.7(a) Marine Protection and Indemnity Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Marine Protection and Indemnity Insurance with coverage at least as broad as Form SP-23. The insurance shall provide coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured for bodily injury and property damage arising from marine operations under this **Contract**. Coverage shall include, without limitation, injury or death of crew members (if not fully provided through other insurance), removal of wreck, damage to piers, wharves and other fixed or floating objects and loss of or damage to any other vessel or craft, or to property on such other vessel or craft.

22.1.7(b) Hull and Machinery Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Hull and Machinery Insurance with coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) as Additional Insured at least as broad as the latest edition of American Institute Tug Form for all tugs used under this

Contract and Collision Liability at least as broad as the latest edition of American Institute Hull Clauses.

22.1.7(c) Marine Pollution Liability Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such Work to maintain, Marine Pollution Liability Insurance covering itself (or the Subcontractor doing such Work) as Named Insured and the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured. Coverage shall be at least as broad as that provided by the latest edition of Water Quality Insurance Syndicate Form and include, without limitation, liability arising from the discharge or substantial threat of a discharge of oil, or from the release or threatened release of a hazardous substance including injury to, or economic losses resulting from, the destruction of or damage to real property, personal property or natural resources.

22.1.8 The **Contractor** shall provide such other types of insurance, at such minimum limits and with such conditions, as are specified in Schedule A of the General Conditions.

22.2 General Requirements for Insurance Coverage and Policies:

22.2.1 All required insurance policies shall be maintained with companies that may lawfully issue the required policy and have an A.M. Best rating of at least A-/VII or a Standard and Poor's rating of at least A, unless prior written approval is obtained from the **City** Corporation Counsel.

22.2.2 The **Contractor** shall be solely responsible for the payment of all premiums for all required policies and all deductibles and self-insured retentions to which such policies are subject, whether or not the **City** is an insured under the policy.

22.2.3 In his/her sole discretion, the **Commissioner** may, subject to the approval of the **Comptroller** and the **City** Corporation Counsel, accept Letters of Credit and/or custodial accounts in lieu of required insurance.

22.2.4 The **City's** limits of coverage for all types of insurance required pursuant to Schedule A of the General Conditions shall be the greater of (i) the minimum limits set forth in Schedule A or (ii) the limits provided to the **Contractor** as Named Insured under all primary, excess, and umbrella policies of that type of coverage.

22.2.5 The **Contractor** may satisfy its insurance obligations under this Article 22 through primary policies or a combination of primary and excess/umbrella policies, so long as all policies provide the scope of coverage required herein.

22.2.6 Policies of insurance provided pursuant to this Article 22 shall be primary and non-contributing to any insurance or self-insurance maintained by the **City**.

22.3 Proof of Insurance:

22.3.1 For all types of insurance required by Article 22.1 and Schedule A, except for insurance required by Articles 22.1.4 and 22.1.7, the **Contractor** shall file proof of insurance in accordance with this Article 22.3 within ten (10) **Days** of award. For insurance

provided pursuant to Articles 22.1.4 and 22.1.7, proof shall be filed by a date specified by the **Commissioner** or ten (10) **Days** prior to the commencement of the portion of the **Work** covered by such policy, whichever is earlier.

22.3.2 For Workers' Compensation Insurance provided pursuant to Article 22.1.2, the **Contractor** shall submit one of the following forms: C-105.2 Certificate of Workers' Compensation Insurance; U-26.3 - State Insurance Fund Certificate of Workers' Compensation Insurance; Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. For Disability Benefits Insurance provided pursuant to Article 22.1.2, the Contractor shall submit DB-120.1 - Certificate Of Insurance Coverage Under The NYS Disability Benefits Law, Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. ACORD forms are not acceptable.

22.3.3 For policies provided pursuant to all of Article 22.1 other than Article 22.1.2, the **Contractor** shall submit one or more Certificates of Insurance on forms acceptable to the **Commissioner**. All such Certificates of Insurance shall certify (a) the issuance and effectiveness of such policies of insurance, each with the specified minimum limits (b) for insurance secured pursuant to Article 22.1.1 that the **City** and any other entity specified in Schedule A is an Additional Insured thereunder; (c) in the event insurance is required pursuant to Article 22.1.6 and/or Article 22.1.7, that the **City** is an Additional Insured thereunder; (d) the company code issued to the insurance company by the National Association of Insurance Commissioners (the NAIC number); and (e) the number assigned to the **Contract** by the **City**. All such Certificates of Insurance shall be accompanied by either a duly executed "Certification by Insurance Broker or Agent" in the form contained in Part III of Schedule A or copies of all policies referenced in such Certificate of Insurance as certified by an authorized representative of the issuing insurance carrier. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

22.3.4 Documentation confirming renewals of insurance shall be submitted to the **Commissioner** prior to the expiration date of coverage of policies required under this **Contract**. Such proofs of insurance shall comply with the requirements of Articles 22.3.2 and 22.3.3.

22.3.5 The **Contractor** shall be obligated to provide the **City** with a copy of any policy of insurance provided pursuant to this Article 22 upon the demand for such policy by the **Commissioner** or the **City** Corporation Counsel.

22.4 Operations of the **Contractor**:

22.4.1 The **Contractor** shall not commence the **Work** unless and until all required certificates have been submitted to and accepted by the **Commissioner**. Acceptance by the **Commissioner** of a certificate does not excuse the **Contractor** from securing insurance consistent with all provisions of this Article 22 or of any liability arising from its failure to do so.

22.4.2 The **Contractor** shall be responsible for providing continuous insurance coverage in the manner, form, and limits required by this **Contract** and shall be authorized to perform **Work** only during the effective period of all required coverage.

22.4.3 In the event that any of the required insurance policies lapse, are revoked, suspended or otherwise terminated, for whatever cause, the **Contractor** shall immediately stop all **Work**, and shall not recommence **Work** until authorized in writing to do so by the **Commissioner**. Upon quitting the **Site**, except as otherwise directed by the **Commissioner**, the **Contractor** shall leave all plant, materials, equipment, tools, and supplies on the **Site**. **Contract** time shall continue to run during such periods and no extensions of time will be granted. The **Commissioner** may also declare the **Contractor** in default for failure to maintain required insurance.

22.4.4 In the event the **Contractor** receives notice, from an insurance company or other person, that any insurance policy required under this Article 22 shall be cancelled or terminated (or has been cancelled or terminated) for any reason, the **Contractor** shall immediately forward a copy of such notice to both the **Commissioner** and the New York City Comptroller, attn: Office of Contract Administration, Municipal Building, One Centre Street, room 1005, New York, New York 10007. Notwithstanding the foregoing, the **Contractor** shall ensure that there is no interruption in any of the insurance coverage required under this Article 22.

22.4.5 Where notice of loss, damage, occurrence, accident, claim or suit is required under an insurance policy maintained in accordance with this Article 22, the **Contractor** shall notify in writing all insurance carriers that issued potentially responsive policies of any such event relating to any operations under this **Contract** (including notice to Commercial General Liability insurance carriers for events relating to the **Contractor's** own employees) no later than 20 days after such event. For any policy where the **City** is an Additional Insured, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Insured as well as the Named Insured." Such notice shall also contain the following information: the number of the insurance policy, the name of the named insured, the date and location of the damage, occurrence, or accident, and the identity of the persons or things injured, damaged or lost. The **Contractor** shall simultaneously send a copy of such notice to the City of New York c/o Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

22.4.6 In the event of any loss, accident, claim, action, or other event that does or can give rise to a claim under any insurance policy required under this Article 22, the **Contractor** shall at all times fully cooperate with the **City** with regard to such potential or actual claim.

22.5 **Subcontractor Insurance:** In the event the **Contractor** requires any **Subcontractor** to procure insurance with regard to any operations under this **Contract** and requires such **Subcontractor** to name the **Contractor** as an **Additional Insured** thereunder, the **Contractor** shall ensure that the **Subcontractor** name the **City**, including its officials and employees, as an Additional Insured with coverage at least as broad as the most recent edition of ISO Form CG 20 26.

22.6 Wherever reference is made in Article 7 or this Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth in Schedule A of the General Conditions. In the event no address is set forth in Schedule A, such documents are to be sent to the **Commissioner's** address as provided elsewhere in this **Contract**.

22.7 Apart from damages or losses covered by insurance provided pursuant to Articles 22.1.2, 22.1.3, or 22.1.5, the **Contractor** waives all rights against the **City**, including its officials and employees, for any damages or losses that are covered under any insurance required under this Article 22 (whether or

not such insurance is actually procured or claims are paid thereunder) or any other insurance applicable to the operations of the **Contractor** and/or its employees, agents, or **Subcontractors**.

22.8 In the event the **Contractor** utilizes a self-insurance program to satisfy any of the requirements of this Article 22, the **Contractor** shall ensure that any such self-insurance program provides the **City** with all rights that would be provided by traditional insurance under this Article 22, including but not limited to the defense and indemnification obligations that insurers are required to undertake in liability policies.

22.9 Materiality/Non-Waiver: The **Contractor's** failure to secure policies in complete conformity with this Article 22, or to give an insurance company timely notice of any sort required in this **Contract** or to do anything else required by this Article 22 shall constitute a material breach of this **Contract**. Such breach shall not be waived or otherwise excused by any action or inaction by the **City** at any time.

22.10 Pursuant to General Municipal Law Section 108, this **Contract** shall be void and of no effect unless **Contractor** maintains Workers' Compensation Insurance for the term of this **Contract** to the extent required and in compliance with the New York State Workers' Compensation Law.

22.11 Other Remedies: Insurance coverage provided pursuant to this Article 22 or otherwise shall not relieve the **Contractor** of any liability under this **Contract**, nor shall it preclude the **City** from exercising any rights or taking such other actions available to it under any other provisions of this **Contract** or **Law**.

ARTICLE 23. MONEY RETAINED AGAINST CLAIMS

23.1 If any claim shall be made by any person or entity (including **Other Contractors** with the **City** on this **Project**) against the **City** or against the **Contractor** and the **City** for any of the following:

(a) An alleged loss, damage, injury, theft or vandalism of any of the kinds referred to in Articles 7 and 12, plus the reasonable costs of defending the **City**, which in the opinion of the **Comptroller** may not be paid by an insurance company (for any reason whatsoever); or

(b) An infringement of copyrights, patents or use of patented articles, tools, etc., as referred to in Article 57; or

(c) Damage claimed to have been caused directly or indirectly by the failure of the **Contractor** to perform the **Work** in strict accordance with this **Contract**,

the amount of such claim, or so much thereof as the **Comptroller** may deem necessary, may be withheld by the **Comptroller**, as security against such claim, from any money due hereunder. The **Comptroller**, in his/her discretion, may permit the **Contractor** to substitute other satisfactory security in lieu of the monies so withheld.

23.2 If an action on such claim is timely commenced and the liability of the **City**, or the **Contractor**, or both, shall have been established therein by a final judgment of a court of competent jurisdiction, or if such claim shall have been admitted by the **Contractor** to be valid, the **Comptroller** shall pay such judgment or admitted claim out of the monies retained by the **Comptroller** under the provisions of this Article 23, and return the balance, if any, without interest, to the **Contractor**.

ARTICLE 24. MAINTENANCE AND GUARANTY

24.1 The **Contractor** shall promptly repair, replace, restore or rebuild, as the **Commissioner** may determine, any finished **Work** in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of **Substantial Completion** (or use and occupancy in accordance with Article 16), except where other periods of maintenance and guaranty are provided for in Schedule A.

24.2 As security for the faithful performance of its obligations hereunder, the **Contractor**, upon filing its requisition for payment on **Substantial Completion**, shall deposit with the **Commissioner** a sum equal to one (1%) percent of the price (or the amount fixed in Schedule A of the General Conditions) in cash or certified check upon a state or national bank and trust company or a check of such bank and trust company signed by a duly authorized officer thereof and drawn to the order of the **Comptroller**, or obligations of the **City**, which the **Comptroller** may approve as of equal value with the sum so required.

24.3 In lieu of the above, the **Contractor** may make such security payment to the **City** by authorizing the **Commissioner** in writing to deduct the amount from the **Substantial Completion** payment which shall be deemed the deposit required above.

24.4 If the **Contractor** has faithfully performed all of its obligations hereunder the **Commissioner** shall so certify to the **Comptroller** within five (5) **Days** after the expiration of one (1) year from the date of **Substantial Completion** and acceptance of the **Work** or within thirty (30) **Days** after the expiration of the guarantee period fixed in the **Specifications**. The security payment shall be repaid to the **Contractor** without interest within thirty (30) **Days** after certification by the **Commissioner** to the **Comptroller** that the **Contractor** has faithfully performed all of its obligations hereunder.

24.5 Notice by the **Commissioner** to the **Contractor** to repair, replace, rebuild or restore such defective or damaged **Work** shall be timely, pursuant to this article, if given not later than ten (10) **Days** subsequent to the expiration of the one (1) year period or other periods provided for herein.

24.6 If the **Contractor** shall fail to repair, replace, rebuild or restore such defective or damaged **Work** promptly after receiving such notice, the **Commissioner** shall have the right to have the **Work** done by others in the same manner as provided for in the completion of a defaulted **Contract**, under Article 51.

24.7 If the security payment so deposited is insufficient to cover the cost of such **Work**, the **Contractor** shall be liable to pay such deficiency on demand by the **Commissioner**.

24.8 The **Engineer's** certificate setting forth the fair and reasonable cost of repairing, replacing, rebuilding or restoring any damaged or defective **Work** when performed by one other than the **Contractor**, shall be binding and conclusive upon the **Contractor** as to the amount thereof.

24.9 The **Contractor** shall obtain all manufacturers' warranties and guaranties of all equipment and materials required by this **Contract** in the name of the **City** and shall deliver same to the **Commissioner**. All of the **City's** rights and title and interest in and to said manufacturers' warranties and guaranties may be assigned by the **City** to any subsequent purchasers of such equipment and materials or lessees of the premises into which the equipment and materials have been installed.

CHAPTER VI: CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM

ARTICLE 25. CHANGES

25.1. Changes may be made to this **Contract** only as duly authorized in writing by the **Commissioner** in accordance with the **Law** and this **Contract**. All such changes, modifications, and amendments will become a part of the **Contract**. **Work** so ordered shall be performed by the **Contractor**.

25.2 **Contract** changes will be made only for **Work** necessary to complete the **Work** included in the original scope of the **Contract** and/or for non-material changes to the scope of the **Contract**. Changes are not permitted for any material alteration in the scope of **Work** in the **Contract**.

25.3 The **Contractor** shall be entitled to a price adjustment for **Extra Work** performed pursuant to a written change order. Adjustments to price shall be computed in one or more of the following ways:

25.3.1 By applicable unit prices specified in the **Contract**; and/or

25.3.2 By agreement of a fixed price; and/or

25.3.3 By time and material records; and/or

25.3.4 In any other manner approved by the **CCPO**.

25.4 All payments for change orders are subject to pre-audit by the **Engineering Audit Officer** and may be post-audited by the **Comptroller** and/or the **Agency**.

ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK

26.1 Overrun of Unit Price Item: An overrun is any quantity of a unit price item which the **Contractor** is directed to provide which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule.

26.1.1 For any unit price item, the **Contractor** will be paid at the unit price bid for any quantity up to one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule. If during the progress of the **Work**, the actual quantity of any unit price item required to complete the **Work** approaches the estimated quantity for that item, and for any reason it appears that the actual quantity of any unit price item necessary to complete the **Work** will exceed the estimated quantity for that item by twenty-five (25%) percent, the **Contractor** shall immediately notify the **Engineer** of such anticipated overrun. The **Contractor** shall not be compensated for any quantity of a unit price item provided which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule without written authorization from the **Engineer**.

26.1.2 If the actual quantity of any unit price item necessary to complete the **Work** will exceed one hundred twenty five (125%) percent of the estimated quantity for that item set forth in the bid schedule, the **City** reserves the right and the **Contractor** agrees to negotiate a new unit price for such item. In no event shall such negotiated new unit price exceed the unit bid price. If the **City** and **Contractor** cannot agree on a new unit price, then the **City** shall order the **Contractor** and the **Contractor** agrees to provide additional quantities of

the item on the basis of time and material records for the actual and reasonable cost as determined under Article 26.2, but in no event at a unit price exceeding the unit price bid.

26.2 **Extra Work:** For **Extra Work** where payment is by agreement on a fixed price in accordance with Article 25.3.2, the price to be paid for such **Extra Work** shall be based on the fair and reasonable estimated cost of the items set forth below. For **Extra Work** where payment is based on time and material records in accordance with Article 25.3.3, the price to be paid for such **Extra Work** shall be the actual and reasonable cost of the items set forth below, calculated in accordance with the formula specified therein, if any.

26.2.1 Necessary materials (including transportation to the **Site**); plus

26.2.2 Necessary direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits; plus

26.2.3 Sales and personal property taxes, if any, required to be paid on materials not incorporated into such **Extra Work**; plus

26.2.4 Reasonable rental value of **Contractor**-owned (or **Subcontractor**-owned, as applicable), necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per operating hour: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. Reasonable rental value is defined as the lower of either seventy-five percent of the monthly prorated rental rates established in "The AED Green Book, Rental Rates and Specifications for Construction Equipment" published by Equipment Watch (the "Green Book"), or seventy-five percent of the monthly prorated rental rates established in the "Rental Rate Blue Book for Construction Equipment" published by Equipment Watch (the "Blue Book") (the applicable Blue Book rate being for rental only without the addition of any operational costs listed in the Blue Book). The reasonable rental value is deemed to be inclusive of all operating costs except for fuel/energy consumption and equipment operator's wages/costs. For multiple shift utilization, reimbursement shall be calculated as follows: first shift shall be seventy-five (75%) percent of such rental rates; second shift shall be sixty (60%) percent of the first shift rate; and third shift shall be forty (40%) percent of the first shift rate. Equipment on standby shall be reimbursed at one-third (1/3) the prorated monthly rental rate. **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment includes equipment from rental companies affiliated with or controlled by the **Contractor** (or **Subcontractor**, as applicable), as determined by the **Commissioner**. In establishing cost reimbursement for non-operating **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment (scaffolding, sheeting systems, road plates, etc.), the **City** may restrict reimbursement to a purchase-salvage/life cycle basis if less than the computed rental costs; plus

26.2.5 Necessary installation and dismantling of such plant and equipment, including transportation to and from the **Site**, if any, provided that, in the case of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) equipment rented from a third party, the cost of installation and dismantling are not allowable if such costs are included in the rental rate; plus

26.2.6 Necessary fees charged by governmental entities; plus

26.2.7 Necessary construction-related service fees charged by non-governmental entities, such as landfill tipping fees; plus

26.2.8 Reasonable rental costs of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per hour of operation: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. In lieu of renting, the **City** reserves the right to direct the purchase of non-operating equipment (scaffolding, sheeting systems, road plates, etc.), with payment on a purchase-salvage/life cycle basis, if less than the projected rental costs; plus

26.2.9 Workers' Compensation Insurance, and any insurance coverage expressly required by the **City** for the performance of the **Extra Work** which is different than the types of insurance required by Article 22 and Schedule A of the General Conditions. The cost of Workers' Compensation Insurance is subject to applicable payroll limitation caps and shall be based upon the carrier's Manual Rate for such insurance derived from the applicable class Loss Cost ("LC") and carrier's Lost Cost Multiplier ("LCM") approved by the New York State Department of Financial Services, and with the exception of experience rating, rate modifiers as promulgated by the New York Compensation Insurance Rating Board ("NYCIRB"); plus

26.2.10 Additional costs incurred as a result of the **Extra Work** for performance and payment bonds; plus

26.2.11 Twelve percent (12%) percent of the total of items in Articles 26.2.1 through 26.2.5 as compensation for overhead, except that no percentage for overhead will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes. Overhead shall include without limitation, all costs and expenses in connection with administration, management superintendence, small tools, and insurance required by Schedule A of the General Conditions other than Workers' Compensation Insurance; plus

26.2.12 Ten (10%) percent of the total of items in Articles 26.2.1 through 26.2.5, plus the items in Article 26.2.11, as compensation for profit, except that no percentage for profit will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes; plus

26.2.13 Five (5%) percent of the total of items in Articles 26.2.6 through 26.2.10 as compensation for overhead and profit.

26.3 Where the **Extra Work** is performed in whole or in part by other than the **Contractor's** own forces pursuant to Article 26.2, the **Contractor** shall be paid, subject to pre-audit by the **Engineering Audit Officer**, the cost of such **Work** computed in accordance with Article 26.2 above, plus an additional allowance of five (5%) percent to cover the **Contractor's** overhead and profit.

26.4 Where a change is ordered, involving both **Extra Work** and omitted or reduced **Contract Work**, the **Contract** price shall be adjusted, subject to pre-audit by the **EAO**, in an amount based on the difference between the cost of such **Extra Work** and of the omitted or reduced **Work**.

26.5 Where the **Contractor** and the **Commissioner** can agree upon a fixed price for **Extra Work** in accordance with Article 25.3.2 or another method of payment for **Extra Work** in accordance with

Article 25.3.4, or for **Extra Work** ordered in connection with omitted **Work**, such method, subject to pre-audit by the **EAO**, may, at the option of the **Commissioner**, be substituted for the cost plus a percentage method provided in Article 26.2; provided, however, that if the **Extra Work** is performed by a **Subcontractor**, the **Contractor** shall not be entitled to receive more than an additional allowance of five (5%) percent for overhead and profit over the cost of such **Subcontractor's Work** as computed in accordance with Article 26.2.

ARTICLE 27. RESOLUTION OF DISPUTES

27.1 All disputes between the **City** and the **Contractor** of the kind delineated in this Article 27.1 that arise under, or by virtue of, this **Contract** shall be finally resolved in accordance with the provisions of this Article 27 and the **PPB** Rules. This procedure for resolving all disputes of the kind delineated herein shall be the exclusive means of resolving any such disputes.

27.1.1 This Article 27 shall not apply to disputes concerning matters dealt with in other sections of the **PPB** Rules, or to disputes involving patents, copyrights, trademarks, or trade secrets (as interpreted by the courts of New York State) relating to proprietary rights in computer software.

27.1.2 This Article 27 shall apply only to disputes about the scope of **Work** delineated by the **Contract**, the interpretation of **Contract** documents, the amount to be paid for **Extra Work** or disputed work performed in connection with the **Contract**, the conformity of the **Contractor's Work** to the **Contract**, and the acceptability and quality of the **Contractor's Work**; such disputes arise when the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** makes a determination with which the **Contractor** disagrees.

27.2 All determinations required by this Article 27 shall be made in writing clearly stated, with a reasoned explanation for the determination based on the information and evidence presented to the party making the determination. Failure to make such determination within the time required by this Article 27 shall be deemed a non-determination without prejudice that will allow application to the next level.

27.3 During such time as any dispute is being presented, heard, and considered pursuant to this Article 27, the **Contract** terms shall remain in force and the **Contractor** shall continue to perform **Work** as directed by the **ACCO** or the **Engineer**. Failure of the **Contractor** to continue **Work** as directed shall constitute a waiver by the **Contractor** of its claim.

27.4 Presentation of Disputes to **Commissioner**.

Notice of Dispute and Agency Response. The **Contractor** shall present its dispute in writing ("Notice of Dispute") to the **Commissioner** within thirty (30) Days of receiving written notice of the determination or action that is the subject of the dispute. This notice requirement shall not be read to replace any other notice requirements contained in the **Contract**. The Notice of Dispute shall include all the facts, evidence, documents, or other basis upon which the **Contractor** relies in support of its position, as well as a detailed computation demonstrating how any amount of money claimed by the **Contractor** in the dispute was arrived at. Within thirty (30) Days after receipt of the detailed written submission comprising the complete Notice of Dispute, the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** shall submit to the **Commissioner** all materials he or she deems pertinent to the dispute. Following initial submissions to the **Commissioner**, either party may demand of the other the production of any document or other material the demanding party believes may be relevant to the dispute. The requested party shall produce all relevant materials that are not otherwise

protected by a legal privilege recognized by the courts of New York State. Any question of relevancy shall be determined by the **Commissioner** whose decision shall be final. Willful failure of the **Contractor** to produce any requested material whose relevancy the **Contractor** has not disputed, or whose relevancy has been affirmatively determined, shall constitute a waiver by the **Contractor** of its claim.

27.4.1 **Commissioner Inquiry.** The **Commissioner** shall examine the material and may, in his or her discretion, convene an informal conference with the **Contractor**, the **ACCO**, and the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** to resolve the issue by mutual consent prior to reaching a determination. The **Commissioner** may seek such technical or other expertise as he or she shall deem appropriate, including the use of neutral mediators, and require any such additional material from either or both parties as he or she deems fit. The **Commissioner's** ability to render, and the effect of, a decision hereunder shall not be impaired by any negotiations in connection with the dispute presented, whether or not the **Commissioner** participated therein. The **Commissioner** may or, at the request of any party to the dispute, shall compel the participation of any **Other Contractor** with a contract related to the **Work** of this **Contract**, and that **Contractor** shall be bound by the decision of the **Commissioner**. Any **Other Contractor** thus brought into the dispute resolution proceeding shall have the same rights and obligations under this Article 27 as the **Contractor** initiating the dispute.

27.4.2 **Commissioner Determination.** Within thirty (30) **Days** after the receipt of all materials and information, or such longer time as may be agreed to by the parties, the **Commissioner** shall make his or her determination and shall deliver or send a copy of such determination to the **Contractor**, the **ACCO**, and **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner**, as applicable, together with a statement concerning how the decision may be appealed.

27.4.3 **Finality of Commissioner's Decision.** The **Commissioner's** decision shall be final and binding on all parties, unless presented to the Contract Dispute Resolution Board pursuant to this Article 27. The **City** may not take a petition to the Contract Dispute Resolution Board. However, should the **Contractor** take such a petition, the **City** may seek, and the Contract Dispute Resolution Board may render, a determination less favorable to the **Contractor** and more favorable to the **City** than the decision of the **Commissioner**.

27.5 **Presentation of Dispute to the Comptroller.** Before any dispute may be brought by the **Contractor** to the Contract Dispute Resolution Board, the **Contractor** must first present its claim to the **Comptroller** for his or her review, investigation, and possible adjustment.

27.5.1 **Time, Form, and Content of Notice.** Within thirty (30) **Days** of its receipt of a decision by the **Commissioner**, the **Contractor** shall submit to the **Comptroller** and to the **Commissioner** a Notice of Claim regarding its dispute with the **Agency**. The Notice of Claim shall consist of (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written decision of the **Commissioner**; and (iii) a copy of all materials submitted by the **Contractor** to the **Agency**, including the Notice of Dispute. The **Contractor** may not present to the **Comptroller** any material not presented to the **Commissioner**, except at the request of the **Comptroller**.

27.5.2 Response. Within thirty (30) **Days** of receipt of the Notice of Claim, the **Agency** shall make available to the **Comptroller** a copy of all material submitted by the **Agency** to the **Commissioner** in connection with the dispute. The **Agency** may not present to the **Comptroller** any material not presented to the **Commissioner** except at the request of the **Comptroller**.

27.5.3 **Comptroller** Investigation. The **Comptroller** may investigate the claim in dispute and, in the course of such investigation, may exercise all powers provided in Sections 7-201 and 7-203 of the Administrative Code. In addition, the **Comptroller** may demand of either party, and such party shall provide, whatever additional material the **Comptroller** deems pertinent to the claim, including original business records of the **Contractor**. Willful failure of the **Contractor** to produce within fifteen (15) **Days** any material requested by the **Comptroller** shall constitute a waiver by the **Contractor** of its claim. The **Comptroller** may also schedule an informal conference to be attended by the **Contractor**, **Agency** representatives, and any other personnel desired by the **Comptroller**.

27.5.4 Opportunity of **Comptroller** to Compromise or Adjust Claim. The **Comptroller** shall have forty-five (45) **Days** from his or her receipt of all materials referred to in Article 27.5.3 to investigate the disputed claim. The period for investigation and compromise may be further extended by agreement between the **Contractor** and the **Comptroller**, to a maximum of ninety (90) **Days** from the **Comptroller's** receipt of all materials. The **Contractor** may not present its petition to the Contract Dispute Resolution Board until the period for investigation and compromise delineated in this Article 27.5.4 has expired. In compromising or adjusting any claim hereunder, the **Comptroller** may not revise or disregard the terms of the **Contract** between the parties.

27.6 Contract Dispute Resolution Board. There shall be a Contract Dispute Resolution Board composed of:

27.6.1 The chief administrative law judge of the Office of Administrative Trials and Hearings (OATH) or his/her designated OATH administrative law judge, who shall act as chairperson, and may adopt operational procedures and issue such orders consistent with this Article 27 as may be necessary in the execution of the Contract Dispute Resolution Board's functions, including, but not limited to, granting extensions of time to present or respond to submissions;

27.6.2 The **CCPO** or his/her designee; any designee shall have the requisite background to consider and resolve the merits of the dispute and shall not have participated personally and substantially in the particular matter that is the subject of the dispute or report to anyone who so participated; and

27.6.3 A person with appropriate expertise who is not an employee of the **City**. This person shall be selected by the presiding administrative law judge from a prequalified panel of individuals, established and administered by OATH with appropriate background to act as decision-makers in a dispute. Such individual may not have a contract or dispute with the **City** or be an officer or employee of any company or organization that does, or regularly represents persons, companies, or organizations having disputes with the **City**.

27.7 Petition to the Contract Dispute Resolution Board. In the event the claim has not been settled or adjusted by the **Comptroller** within the period provided in this Article 27, the **Contractor**,

within thirty (30) **Days** thereafter, may petition the Contract Dispute Resolution Board to review the **Commissioner's** determination.

27.7.1 **Form and Content of Petition by Contractor.** The **Contractor** shall present its dispute to the Contract Dispute Resolution Board in the form of a petition, which shall include (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed, and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written Decision of the **Commissioner**, (iii) copies of all materials submitted by the **Contractor** to the Agency; (iv) a copy of the written decision of the **Comptroller**, if any, and (v) copies of all correspondence with, or written material submitted by the **Contractor**, to the **Comptroller**. The **Contractor** shall concurrently submit four (4) complete sets of the Petition: one set to the **City Corporation Counsel** (Attn: Commercial and Real Estate Litigation Division) and three (3) sets to the Contract Dispute Resolution Board at OATH's offices with proof of service on the **City Corporation Counsel**. In addition, the **Contractor** shall submit a copy of the written statement of the substance of the dispute, cited in (i) above, to both the **Commissioner** and the **Comptroller**.

27.7.2 **Agency Response.** Within thirty (30) **Days** of its receipt of the Petition by the **City Corporation Counsel**, the **Agency** shall respond to the brief written statement of the **Contractor** and make available to the Contract Dispute Resolution Board all material it submitted to the **Commissioner** and **Comptroller**. Three (3) complete copies of the **Agency** response shall be provided to the Contract Dispute Resolution Board and one to the **Contractor**. Extensions of time for submittal of the **Agency** response shall be given as necessary upon a showing of good cause or, upon consent of the parties, for an initial period of up to thirty (30) **Days**.

27.7.3 **Further Proceedings.** The Contract Dispute Resolution Board shall permit the **Contractor** to present its case by submission of memoranda, briefs, and oral argument. The Contract Dispute Resolution Board shall also permit the **Agency** to present its case in response to the **Contractor** by submission of memoranda, briefs, and oral argument. If requested by the **City Corporation Counsel**, the **Comptroller** shall provide reasonable assistance in the preparation of the **Agency's** case. Neither the **Contractor** nor the **Agency** may support its case with any documentation or other material that was not considered by the **Comptroller**, unless requested by the Contract Dispute Resolution Board. The Contract Dispute Resolution Board, in its discretion, may seek such technical or other expert advice as it shall deem appropriate and may seek, on its own or upon application of a party, any such additional material from any party as it deems fit. The Contract Dispute Resolution Board, in its discretion, may combine more than one dispute between the parties for concurrent resolution.

27.7.4 **Contract Dispute Resolution Board Determination.** Within forty-five (45) **Days** of the conclusion of all written submissions and oral arguments, the Contract Dispute Resolution Board shall render a written decision resolving the dispute. In an unusually complex case, the Contract Dispute Resolution Board may render its decision in a longer period, not to exceed ninety (90) **Days**, and shall so advise the parties at the commencement of this period. The Contract Dispute Resolution Board's decision must be consistent with the terms of the **Contract**. Decisions of the Contract Dispute Resolution Board shall only resolve matters before the Contract Dispute Resolution Board and shall not have precedential effect with respect to matters not before the Contract Dispute Resolution Board.

27.7.5 Notification of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution Board shall send a copy of its decision to the **Contractor**, the **ACCO**, the Engineer, the **Comptroller**, the **City Corporation Counsel**, the **CCPO**, and the **PPB**. A decision in favor of the **Contractor** shall be subject to the prompt payment provisions of the **PPB Rules**. The Required Payment Date shall be thirty (30) Days after the date the parties are formally notified of the Contract Dispute Resolution Board's decision.

27.7.6 Finality of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution Board's decision shall be final and binding on all parties. Any party may seek review of the Contract Dispute Resolution Board's decision solely in the form of a challenge, filed within four (4) months of the date of the Contract Dispute Resolution Board's decision, in a court of competent jurisdiction of the State of New York, County of New York pursuant to Article 78 of the Civil Practice Law and Rules. Such review by the court shall be limited to the question of whether or not the Contract Dispute Resolution Board's decision was made in violation of lawful procedure, was affected by an error of **Law**, or was arbitrary and capricious or an abuse of discretion. No evidence or information shall be introduced or relied upon in such proceeding that was not presented to the Contract Dispute Resolution Board in accordance with this Article 27.

27.8 Any termination, cancellation, or alleged breach of the **Contract** prior to or during the pendency of any proceedings pursuant to this Article 27 shall not affect or impair the ability of the **Commissioner** or Contract Dispute Resolution Board to make a binding and final decision pursuant to this Article 27.

ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS

28.1 While the **Contractor** or any of its **Subcontractors** is performing **Work** on a time and material basis or **Extra Work** on a time and material basis ordered by the **Commissioner** under Article 25, or where the **Contractor** believes that it or any of its **Subcontractors** is performing **Extra Work** but a final determination by **Agency** has not been made, or the **Contractor** or any of its **Subcontractors** is performing disputed **Work** (whether on or off the **Site**), or complying with a determination or order under protest in accordance with Articles 11, 27, and 30, in each such case the **Contractor** shall furnish the **Resident Engineer** daily with three (3) copies of written statements signed by the **Contractor's** representative at the **Site** showing:

28.1.1 The name, trade, and number of each worker employed on such **Work** or engaged in complying with such determination or order, the number of hours employed, and the character of the **Work** each is doing; and

28.1.2 The nature and quantity of any materials, plant and equipment furnished or used in connection with the performance of such **Work** or compliance with such determination or order, and from whom purchased or rented.

28.2 A copy of such statement will be countersigned by the **Resident Engineer**, noting thereon any items not agreed to or questioned, and will be returned to the **Contractor** within two (2) **Days** after submission.

28.3 The **Contractor** and its **Subcontractors**, when required by the **Commissioner**, or the **Comptroller**, shall also produce for inspection, at the office of the **Contractor** or **Subcontractor**, any and all of its books, bid documents, financial statements, vouchers, records, daily job diaries and reports,

and cancelled checks, and any other documents relating to showing the nature and quantity of the labor, materials, plant and equipment actually used in the performance of such **Work**, or in complying with such determination or order, and the amounts expended therefor, and shall permit the **Commissioner** and the **Comptroller** to make such extracts therefrom, or copies thereof, as they or either of them may desire.

28.4 In connection with the examination provided for herein, the **Commissioner**, upon demand therefor, will produce for inspection by the **Contractor** such records as the **Agency** may have with respect to such **Extra Work** or disputed **Work** performed under protest pursuant to order of the **Commissioner**, except those records and reports which may have been prepared for the purpose of determining the accuracy and validity of the **Contractor's** claim.

28.5 Failure to comply strictly with these requirements shall constitute a waiver of any claim for extra compensation or damages on account of the performance of such **Work** or compliance with such determination or order.

ARTICLE 29. OMITTED WORK

29.1 If any **Contract Work** in a lump sum **Contract**, or if any part of a lump sum item in a unit price, lump sum, or percentage-bid **Contract** is omitted by the **Commissioner** pursuant to Article 33, the **Contract** price, subject to audit by the EAO, shall be reduced by a pro rata portion of the lump sum bid amount based upon the percent of **Work** omitted subject to Article 29.4. For the purpose of determining the pro rata portion of the lump sum bid amount, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be the determining factor.

29.2 If the whole of a lump sum item or units of any other item is so omitted by the **Commissioner** in a unit price, lump sum, or percentage-bid **Contract**, then no payment will be made therefor except as provided in Article 29.4.

29.3 For units that have been ordered but are only partially completed, the unit price shall be reduced by a pro rata portion of the unit price bid based upon the percentage of **Work** omitted subject to Article 29.4.

29.4 In the event the **Contractor**, with respect to any omitted **Work**, has purchased any non-cancelable material and/or equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated into the **Work**, the **Contractor** shall be paid for such material and/or equipment in accordance with Article 64.2.1(b); provided, however, such payment is contingent upon the **Contractor's** delivery of such material and/or equipment in acceptable condition to a location designated by the **City**.

29.5 The **Contractor** agrees to make no claim for damages or for loss of overhead and profit with regard to any omitted **Work**.

ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS

30.1 If the **Contractor** shall claim to be sustaining damages by reason of any act or omission of the **City** or its agents, it shall submit to the **Commissioner** within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter to the extent additional damages are being incurred for the same condition, verified statements of the details and the amounts of such

damages, together with documentary evidence of such damages. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. Failure of the **Commissioner** to respond in writing to a written request for additional time within thirty (30) **Days** shall be deemed a denial of the request. On failure of the **Contractor** to strictly comply with the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action or dispute resolution procedure arising under or by reason of this **Contract** shall not be different from or in excess of the statements and documentation made pursuant to this Article 30. This Article 30.1 does not apply to claims submitted to the **Commissioner** pursuant to Article 11 or to claims disputing a determination under Article 27.

30.2 In addition to the foregoing statements, the **Contractor** shall, upon notice from the **Commissioner**, produce for examination at the **Contractor's** office, by the **Engineer, Architect** or **Project Manager**, all of its books of account, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**, and submit itself and persons in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.3 In addition to the statements required under Article 28 and this Article 30, the **Contractor** and/or its **Subcontractor** shall, within thirty (30) **Days** upon notice from the **Commissioner** or **Comptroller**, produce for examination at the **Contractor's** and/or **Subcontractor's** office, by a representative of either the **Commissioner** or **Comptroller**, all of its books of account, bid documents, financial statements, accountant workpapers, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**. Further, the **Contractor** and/or its **Subcontractor** shall submit any person in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.4 Unless the information and examination required under Article 30.3 is provided by the **Contractor** and/or its **Subcontractor** upon thirty (30) **Days'** notice from the **Commissioner** or **Comptroller**, or upon the **Commissioner's** or **Comptroller's** written authorization to extend the time to comply, the **City** shall be released from all claims arising under, relating to or by reason of this **Contract**, except for sums certified by the **Commissioner** to be due under the provisions of this **Contract**. It is further stipulated and agreed that no person has the power to waive any of the foregoing provisions and that in any action or dispute resolution procedure against the **City** to recover any sum in excess of the sums certified by the **Commissioner** to be due under or by reason of this **Contract**, the **Contractor** must allege in its complaint and prove, at trial or during such dispute resolution procedure, compliance with the provisions of this Article 30.

30.5 In addition, after the commencement of any action or dispute resolution procedure by the **Contractor** arising under or by reason of this **Contract**, the **City** shall have the right to require the **Contractor** to produce for examination under oath, up until the trial of the action or hearing before the Contract Dispute Resolution Board, the books and documents described in Article 30.3 and submit itself and all persons in its employ for examination under oath. If this Article 30 is not complied with as required, then the **Contractor** hereby consents to the dismissal of the action or dispute resolution procedure.

**CHAPTER VII: POWERS OF THE RESIDENT ENGINEER, THE ENGINEER OR
ARCHITECT AND THE COMMISSIONER**

ARTICLE 31. THE RESIDENT ENGINEER

31.1 The **Resident Engineer** shall have the power to inspect, supervise, and control the performance of the **Work**, subject to review by the **Commissioner**. The **Resident Engineer** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER

32.1 The **Engineer** or **Architect** or **Project Manager**, in addition to those matters elsewhere herein delegated to the **Engineer** and expressly made subject to his/her determination, direction or approval, shall have the power, subject to review by the **Commissioner**:

32.1.1 To determine the amount, quality, and location of the **Work** to be paid for hereunder; and

32.1.2 To determine all questions in relation to the **Work**, to interpret the **Contract Drawings, Specifications, and Addenda**, and to resolve all patent inconsistencies or ambiguities therein; and

32.1.3 To determine how the **Work** of this **Contract** shall be coordinated with **Work** of **Other Contractors** engaged simultaneously on this **Project**, including the power to suspend any part of the **Work**, but not the whole thereof; and

32.1.4 To make minor changes in the **Work** as he/she deems necessary, provided such changes do not result in a net change in the cost to the **City** or to the **Contractor** of the **Work** to be done under the **Contract**; and

32.1.5 To amplify the **Contract Drawings**, add explanatory information and furnish additional **Specifications** and drawings, consistent with this **Contract**.

32.2 The foregoing enumeration shall not imply any limitation upon the power of the **Engineer** or **Architect** or **Project Manager**, for it is the intent of this **Contract** that all of the **Work** shall generally be subject to his/her determination, direction, and approval, except where the determination, direction or approval of someone other than the **Engineer** or **Architect** or **Project Manager** is expressly called for herein.

32.3 The **Engineer** or **Architect** or **Project Manager** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 33. THE COMMISSIONER

33.1 The **Commissioner**, in addition to those matters elsewhere herein expressly made subject to his/her determination, direction or approval, shall have the power:

33.1.1 To review and make determinations on any and all questions in relation to this **Contract** and its performance; and

33.1.2 To modify or change this **Contract** so as to require the performance of **Extra Work** (subject, however, to the limitations specified in Article 25) or the omission of **Contract Work**; and

33.1.3 To suspend the whole or any part of the **Work** whenever in his/her judgment such suspension is required:

33.1.3(a) In the interest of the **City** generally; or

33.1.3(b) To coordinate the **Work** of the various contractors engaged on this **Project** pursuant to the provisions of Article 12; or

33.1.3(c) To expedite the completion of the entire **Project** even though the completion of this particular **Contract** may thereby be delayed.

ARTICLE 34. NO ESTOPPEL

34.1 Neither the **City** nor any **Agency**, official, agent or employee thereof, shall be bound, precluded or estopped by any determination, decision, approval, order, letter, payment or certificate made or given under or in connection with this **Contract** by the **City**, the **Commissioner**, the **Engineer**, the **Resident Engineer**, or any other official, agent or employee of the **City**, either before or after the final completion and acceptance of the **Work** and payment therefor:

34.1.1 From showing the true and correct classification, amount, quality or character of the **Work** actually done; or that any such determination, decision, order, letter, payment or certificate was untrue, incorrect or improperly made in any particular, or that the **Work**, or any part thereof, does not in fact conform to the requirements of this **Contract**; and

34.1.2 From demanding and recovering from the **Contractor** any overpayment made to it, or such damages as the **City** may sustain by reason of the **Contractor's** failure to perform each and every part of its **Contract**.

CHAPTER VIII: LABOR PROVISIONS

ARTICLE 35. EMPLOYEES

35.1 The **Contractor** and its **Subcontractors** shall not employ on the **Work**:

35.1.1 Anyone who is not competent, faithful and skilled in the **Work** for which he/she shall be employed; and whenever the **Commissioner** shall inform the **Contractor**, in writing, that any employee is, in his/her opinion, incompetent, unfaithful or disobedient, that employee shall be discharged from the **Work** forthwith, and shall not again be employed upon it; or

35.1.2 Any labor, materials or means whose employment, or utilization during the course of this **Contract**, may tend to or in any way cause or result in strikes, work stoppages, delays, suspension of **Work** or similar troubles by workers employed by the **Contractor** or its **Subcontractors**, or by any of the trades working in or about the buildings and premises where **Work** is being performed under this **Contract**, or by **Other Contractors** or their **Subcontractors** pursuant to other contracts, or on any other building or premises owned or operated by the **City**, its **Agencies**, departments, boards or authorities. Any violation by the **Contractor** of this requirement may, upon certification of the **Commissioner**, be considered as proper and sufficient cause for declaring the **Contractor** to be in default, and for the **City** to take action against it as set forth in Chapter X of this **Contract**, or such other article of this **Contract** as the Commissioner may deem proper; or

35.1.3 In accordance with Section 220.3-e of the Labor Law of the State of New York (hereinafter "Labor Law"), the **Contractor** and its **Subcontractors** shall not employ on the **Work** any apprentice, unless he/she is a registered individual, under a bona fide program registered with the New York State Department of Labor. The allowable ratio of apprentices to journey-level workers in any craft classification shall not be greater than the ratio permitted to the **Contractor** as to its work force on any job under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the wage rate determined by the **Comptroller** of the **City** for the classification of **Work** actually performed. The **Contractor** or **Subcontractor** will be required to furnish written evidence of the registration of its program and apprentices as well as all the appropriate ratios and wage rates, for the area of the construction prior to using any apprentices on the **Contract Work**.

35.2 If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, all laborers, workers, and mechanics employed in the performance of the **Contract** on the public work site, either by the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by the **Contract**, shall be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration.

35.3 In accordance with Local Law Nos. 30-2012 and 33-2012, codified at sections 6-132 and 12-113 of the Administrative Code, respectively,

35.3.1 The **Contractor** shall not take an adverse personnel action with respect to an officer or employee in retaliation for such officer or employee making a report of information concerning conduct which such officer or employee knows or reasonably believes to involve corruption, criminal activity, conflict of interest, gross mismanagement or abuse of authority by any officer or employee relating to this **Contract** to (a) the Commissioner of the Department of Investigation, (b) a member of the New York City Council, the Public Advocate, or the **Comptroller**, or (c) the **CCPO**, **ACCO**, **Agency** head, or **Commissioner**.

35.3.2 If any of the **Contractor's** officers or employees believes that he or she has been the subject of an adverse personnel action in violation of Article 35.3.1, he or she shall be entitled to bring a cause of action against the **Contractor** to recover all relief necessary to make him or her whole. Such relief may include but is not limited to: (a) an injunction to restrain continued retaliation, (b) reinstatement to the position such employee would have had but for the retaliation or to an equivalent position, (c) reinstatement of full fringe benefits and seniority rights, (d) payment of two times back

pay, plus interest, and (e) compensation for any special damages sustained as a result of the retaliation, including litigation costs and reasonable attorney's fees.

35.3.3 The **Contractor** shall post a notice provided by the **City** in a prominent and accessible place on any site where work pursuant to the **Contract** is performed that contains information about:

35.3.3(a) how its employees can report to the New York City Department of Investigation allegations of fraud, false claims, criminality or corruption arising out of or in connection with the **Contract**; and

35.3.3(b) the rights and remedies afforded to its employees under Administrative Code sections 7-805 (the New York City False Claims Act) and 12-113 (the Whistleblower Protection Expansion Act) for lawful acts taken in connection with the reporting of allegations of fraud, false claims, criminality or corruption in connection with the **Contract**.

35.3.4 For the purposes of this Article 35.3, "adverse personnel action" includes dismissal, demotion, suspension, disciplinary action, negative performance evaluation, any action resulting in loss of staff, office space, equipment or other benefit, failure to appoint, failure to promote, or any transfer or assignment or failure to transfer or assign against the wishes of the affected officer or employee.

35.3.5 This Article 35.3 is applicable to all of the **Contractor's Subcontractors** having subcontracts with a value in excess of \$100,000; accordingly, the **Contractor** shall include this rider in all subcontracts with a value in excess of \$100,000.

35.4 Article 35.3 is not applicable to this **Contract** if it is valued at \$100,000 or less. Articles 35.3.1, 35.3.2, 35.3.4, and 35.3.5 are not applicable to this **Contract** if it was solicited pursuant to a finding of an emergency.

35.5 Paid Sick Leave Law.

35.5.1 Introduction and General Provisions.

35.5.1(a) The Earned Sick Time Act, also known as the Paid Sick Leave Law ("PSLL"), requires covered employees who annually perform more than 80 hours of work in New York City to be provided with paid sick time.² Contractors of the **City** or of other governmental entities may be required to provide sick time pursuant to the PSLL.

35.5.1(b) The PSLL became effective on April 1, 2014, and is codified at Title 20, Chapter 8, of the New York City Administrative Code. It is administered by the City's Department of Consumer Affairs ("DCA"); DCA's rules promulgated under the PSLL are codified at Chapter 7 of Title 6 of the Rules of the City of New York ("Rules").

² Pursuant to the PSLL, if fewer than five employees work for the same employer, as determined pursuant to New York City Administrative Code § 20-912(g), such employer has the option of providing such employees uncompensated sick time.

35.5.1(c) The **Contractor** agrees to comply in all respects with the PSL and the Rules, and as amended, if applicable, in the performance of this **Contract**. The **Contractor** further acknowledges that such compliance is a material term of this **Contract** and that failure to comply with the PSL in performance of this **Contract** may result in its termination.

35.5.1(d) The **Contractor** must notify the **Agency Chief Contracting Officer** of the **Agency** with whom it is contracting in writing within ten (10) days of receipt of a complaint (whether oral or written) regarding the PSL involving the performance of this **Contract**. Additionally, the **Contractor** must cooperate with DCA's education efforts and must comply with DCA's subpoenas and other document demands as set forth in the PSL and Rules.

35.5.1(e) The PSL is summarized below for the convenience of the **Contractor**. The **Contractor** is advised to review the PSL and Rules in their entirety. On the website www.nyc.gov/PaidSickLeave there are links to the PSL and the associated Rules as well as additional resources for employers, such as Frequently Asked Questions, timekeeping tools and model forms, and an event calendar of upcoming presentations and webinars at which the **Contractor** can get more information about how to comply with the PSL. The **Contractor** acknowledges that it is responsible for compliance with the PSL notwithstanding any inconsistent language contained herein.

35.5.2 Pursuant to the PSL and the Rules: Applicability, Accrual, and Use.

35.5.2(a) An employee who works within the City of New York for more than eighty hours in any consecutive 12-month period designated by the employer as its "calendar year" pursuant to the PSL ("Year") must be provided sick time. Employers must provide a minimum of one hour of sick time for every 30 hours worked by an employee and compensation for such sick time must be provided at the greater of the employee's regular hourly rate or the minimum wage. Employers are not required to provide more than 40 hours of sick time to an employee in any Year.

35.5.2(b) An employee has the right to determine how much sick time he or she will use, provided that employers may set a reasonable minimum increment for the use of sick time not to exceed four hours per **Day**. In addition, an employee may carry over up to 40 hours of unused sick time to the following Year, provided that no employer is required to allow the use of more than forty hours of sick time in a Year or carry over unused paid sick time if the employee is paid for such unused sick time and the employer provides the employee with at least the legally required amount of paid sick time for such employee for the immediately subsequent Year on the first **Day** of such Year.

35.5.2(c) An employee entitled to sick time pursuant to the PSL may use sick time for any of the following:

- i. such employee's mental illness, physical illness, injury, or health condition or the care of such illness, injury, or condition or such employee's need for medical diagnosis or preventive medical care;
- ii. such employee's care of a family member (an employee's child, spouse, domestic partner, parent, sibling, grandchild or grandparent, or the child or parent of an employee's spouse or domestic partner) who has a mental

- illness, physical illness, injury or health condition or who has a need for medical diagnosis or preventive medical care;
- iii. closure of such employee's place of business by order of a public official due to a public health emergency; or
 - iv. such employee's need to care for a child whose school or childcare provider has been closed due to a public health emergency.

35.5.2(d) An employer must not require an employee, as a condition of taking sick time, to search for a replacement. However, an employer may require an employee to provide: reasonable notice of the need to use sick time; reasonable documentation that the use of sick time was needed for a reason above if for an absence of more than three consecutive work days; and/or written confirmation that an employee used sick time pursuant to the PSL. However, an employer may not require documentation specifying the nature of a medical condition or otherwise require disclosure of the details of a medical condition as a condition of providing sick time and health information obtained solely due to an employee's use of sick time pursuant to the PSL must be treated by the employer as confidential.

35.5.2(e) If an employer chooses to impose any permissible discretionary requirement as a condition of using sick time, it must provide to all employees a written policy containing those requirements, using a delivery method that reasonably ensures that employees receive the policy. If such employer has not provided its written policy, it may not deny sick time to an employee because of non-compliance with such a policy.

35.5.2(f) Sick time to which an employee is entitled must be paid no later than the payday for the next regular payroll period beginning after the sick time was used.

35.5.3 Exemptions and Exceptions. Notwithstanding the above, the PSL does not apply to any of the following:

35.5.3(a) an independent contractor who does not meet the definition of employee under section 190(2) of the New York State Labor Law;

35.5.3(b) an employee covered by a valid collective bargaining agreement in effect on April 1, 2014, until the termination of such agreement;

35.5.3(c) an employee in the construction or grocery industry covered by a valid collective bargaining agreement if the provisions of the PSL are expressly waived in such collective bargaining agreement;

35.5.3(d) an employee covered by another valid collective bargaining agreement if such provisions are expressly waived in such agreement and such agreement provides a benefit comparable to that provided by the PSL for such employee;

35.5.3(e) an audiologist, occupational therapist, physical therapist, or speech language pathologist who is licensed by the New York State Department of Education and who calls in for work assignments at will, determines his or her own schedule, has the ability to reject or accept any assignment referred to him or her, and is paid an average hourly wage that is at least four times the federal minimum wage;

35.5.3(f) an employee in a work study program under Section 2753 of Chapter 42 of the United States Code;

35.5.3(g) an employee whose work is compensated by a qualified scholarship program as that term is defined in the Internal Revenue Code, Section 117 of Chapter 20 of the United States Code; or

35.5.3(h) a participant in a Work Experience Program (WEP) under section 336-c of the New York State Social Services Law.

35.5.4 Retaliation Prohibited. An employer may not threaten or engage in retaliation against an employee for exercising or attempting in good faith to exercise any right provided by the PSLL. In addition, an employer may not interfere with any investigation, proceeding, or hearing pursuant to the PSLL.

35.5.5 Notice of Rights.

35.5.5(a) An employer must provide its employees with written notice of their rights pursuant to the PSLL. Such notice must be in English and the primary language spoken by an employee, provided that DCA has made available a translation into such language. Downloadable notices are available on DCA's website at <http://www.nyc.gov/html/dca/html/law/PaidSickLeave.shtml>.

35.5.5(b) Any person or entity that willfully violates these notice requirements is subject to a civil penalty in an amount not to exceed fifty dollars for each employee who was not given appropriate notice.

35.5.6 Records. An employer must retain records documenting its compliance with the PSLL for a period of at least three years, and must allow DCA to access such records in furtherance of an investigation related to an alleged violation of the PSLL.

35.5.7 Enforcement and Penalties.

35.5.7(a) Upon receiving a complaint alleging a violation of the PSLL, DCA has the right to investigate such complaint and attempt to resolve it through mediation. Within 30 **Days** of written notification of a complaint by DCA, or sooner in certain circumstances, the employer must provide DCA with a written response and such other information as DCA may request. If DCA believes that a violation of the PSLL has occurred, it has the right to issue a notice of violation to the employer.

35.5.7(b) DCA has the power to grant an employee or former employee all appropriate relief as set forth in New York City Administrative Code § 20-924(d). Such relief may include, among other remedies, treble damages for the wages that should have been paid, damages for unlawful retaliation, and damages and reinstatement for unlawful discharge. In addition, DCA may impose on an employer found to have violated the PSLL civil penalties not to exceed \$500 for a first violation, \$750 for a second violation within two years of the first violation, and \$1,000 for each succeeding violation within two years of the previous violation.

35.5.8 More Generous Policies and Other Legal Requirements. Nothing in the PSLL is intended to discourage, prohibit, diminish, or impair the adoption or retention of a more generous sick time policy, or the obligation of an employer to comply with any contract,

collective bargaining agreement, employment benefit plan or other agreement providing more generous sick time. The PSLL provides minimum requirements pertaining to sick time and does not preempt, limit or otherwise affect the applicability of any other law, regulation, rule, requirement, policy or standard that provides for greater accrual or use by employees of sick leave or time, whether paid or unpaid, or that extends other protections to employees. The PSLL may not be construed as creating or imposing any requirement in conflict with any federal or state law, rule or regulation.

35.6 HireNYC: Hiring and Reporting Requirements. This Article 35.6 applies to construction contracts of \$1,000,000 or more. The **Contractor** shall comply with the requirements of Articles 35.6.1-35.6.5 for all non-trades jobs (e.g., for an administrative position arising out of **Work** ant located in New York City). The **Contractor** shall reasonably cooperate with SBS and the **City** on specific outreach events, including "Hire-on-the-Spot" events, for the hiring of trades workers in connection with the **Work**. If provided elsewhere in this **Contract**, this **Contract** is subject to a project labor agreement.

35.6.1 Enrollment. The **Contractor** shall enroll with the HireNYC system, found at www.nyc.gov/sbs, within thirty (30) days after the registration of this **Contract** pursuant to Section 328 of the New York City Charter. The **Contractor** shall provide information about the business, designate a primary contact and say whether it intends to hire for any entry to mid-level job opportunities arising from this **Contract** and located in New York City, and, if so, the approximate start date of the first hire.

35.6.2 Job Posting Requirements.

35.6.2(a) Once enrolled in HireNYC, the **Contractor** agrees to update the HireNYC portal with all entry to mid-level job opportunities arising from this **Contract** and located in New York City, if any, which shall be defined as jobs requiring no more than an associate degree, as provided by the New York State Department of Labor (see Column F of <https://labor.ny.gov/stats/2012-2022-NYS-Employment-Prospects.xls>). The information to be updated includes the types of entry and mid-level positions made available from the work arising from the **Contract** and located in New York City, the number of positions, the anticipated schedule of initiating the hiring process for these positions, and the contact information for the **Contractor's** representative charged with overseeing hiring. The **Contractor** must update the HireNYC portal with any hiring needs arising from the contract and located in New York City, and the requirements of the jobs to be filled, no less than three weeks prior to the intended first day of employment for each new position, except with the permission of SBS, not to be unreasonably withheld, and must also update the HireNYC portal as set forth below.

35.6.2(b) After enrollment through HireNYC and submission of relevant information, SBS will work with the **Contractor** to develop a recruitment plan which will outline the candidate screening process, and will provide clear instructions as to when, where, and how interviews will take place. HireNYC will screen applicants based on employer requirements and refer applicants whom it believes are qualified to the **Contractor** for interviews. The **Contractor** must interview referred applicants whom it believes are qualified.

35.6.2(c) After completing an interview of a candidate referred by HireNYC, the **Contractor** must provide feedback via the portal within twenty (20) business days to indicate which candidates were interviewed and hired, if any. In addition, the **Contractor** shall provide the start date of new hires, and additional information

reasonably related to such hires, within twenty (20) business days after the start date. In the event the **Contractor** does not have any job openings covered by this Rider in any given year, the **Contractor** shall be required to provide an annual update to HireNYC to that effect. For this purpose, the reporting year shall run from the date of the registration of the **Contract** pursuant to Charter section 328 and each anniversary date.

35.6.2(d) These requirements do not limit the **Contractor's** ability to assess the qualifications of prospective workers, and to make final hiring and retention decisions. No provision of this Article 35.6 shall be interpreted so as to require the **Contractor** to employ any particular worker.

35.6.2(e) In addition, the provisions of this Article 35.6 shall not apply to positions that the **Contractor** intends to fill with employees employed pursuant to the job retention provision of Section 22-505 of the Administrative Code of the City of New York. The **Contractor** shall not be required to report such openings with HireNYC. However, the **Contractor** shall enroll with the HireNYC system pursuant to Article 35.6.1, above, and, if such positions subsequently become open, then the remaining provisions of this Article 35.6 will apply.

35.6.3 Breach and Liquidated Damages. If the **Contractor** fails to comply with the terms of the **ContrSact** and this Article 35.6 (1) by not enrolling its business with HireNYC; (2) by not informing HireNYC, as required, of open positions; or (3) by failing to interview a qualified candidate, the **Agency** may assess liquidated damages in the amount of two-thousand five hundred dollars (\$2,500) per breach. For all other events of noncompliance with the terms of this Article 35.6, the **Agency** may assess liquidated damages in the amount of five hundred dollars (\$500) per breach. Furthermore, in the event the **Contractor** breaches the requirements of this Article 35.6 during the term of the **Contract**, the **City** may hold the **Contractor** in default of this **Contract**.

35.6.4 Audit Compliance. In addition to the auditing requirements set forth in other parts of the **Contract**, the **Contractor** shall permit SBS and the **City** to inspect any and all records concerning or relating to job openings or the hiring of individuals for work arising from the **Contract** and located in New York City. The **Contractor** shall permit an inspection within seven (7) business days of the request.

35.6.5 Other Reporting Requirements. The **Contractor** shall report to the **City**, on a monthly basis, all information reasonably requested by the **City** that is necessary for the **City** to comply with any reporting requirements imposed by **Law**, including any requirement that the **City** maintain a publicly accessible database. In addition, the **Contractor** agrees to comply with all reporting requirements imposed by **Law**, or as otherwise requested by the **City**.

35.6.6 Federal Hiring Requirements. If this **Contract** is federally funded (as indicated elsewhere in this **Contract**), the **Contractor** shall comply with all federal hiring requirements as may be set forth in this **Contract**, including, as applicable: (a) Section 3 of the HUD Act of 1968, which requires, to the greatest extent feasible, economic opportunities for 30 percent of new hires be given to low- and very low-income persons, particularly persons who are recipients of HUD assistance for housing and Executive Order 11246, which prohibits discrimination in employment due to race, color, religion, sex or national origin, and requires the implementation of goals for minority and female participation for work involving any construction trade.

ARTICLE 36. NO DISCRIMINATION

36.1 The **Contractor** specifically agrees, as required by Labor Law Section 220-e, as amended, that:

36.1.1 In the hiring of employees for the performance of **Work** under this **Contract** or any subcontract hereunder, neither the **Contractor**, **Subcontractor**, nor any person acting on behalf of such **Contractor** or **Subcontractor**, shall by reason of race, creed, color or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the **Work** to which the employment relates;

36.1.2 Neither the **Contractor**, **Subcontractor**, nor any person on its behalf shall, in any manner, discriminate against or intimidate any employee hired for the performance of **Work** under this **Contract** on account of race, creed, color or national origin;

36.1.3 There may be deducted from the amount payable to the **Contractor** by the **City** under this **Contract** a penalty of fifty (\$50.00) dollars for each person for each **Day** during which such person was discriminated against or intimidated in violation of the provisions of this **Contract**; and

36.1.4 This **Contract** may be cancelled or terminated by the **City** and all moneys due or to become due hereunder may be forfeited, for a second or any subsequent violation of the terms or conditions of this Article 36.

36.1.5 This Article 36 covers all construction, alteration and repair of any public building or public work occurring in the State of New York and the manufacture, sale, and distribution of materials, equipment, and supplies to the extent that such operations are performed within the State of New York pursuant to this **Contract**.

36.2 The **Contractor** specifically agrees, as required by Section 6-108 of the Administrative Code, as amended, that:

36.2.1 It shall be unlawful for any person engaged in the construction, alteration or repair of buildings or engaged in the construction or repair of streets or highways pursuant to a **Contract** with the **City** or engaged in the manufacture, sale or distribution of materials, equipment or supplies pursuant to a **Contract** with the **City** to refuse to employ or to refuse to continue in any employment any person on account of the race, color or creed of such person.

36.2.2 It shall be unlawful for any person or any servant, agent or employee of any person, described in Article 36.1.2, to ask, indicate or transmit, orally or in writing, directly or indirectly, the race, color or creed or religious affiliation of any person employed or seeking employment from such person, firm or corporation.

36.2.3 Breach of the foregoing provisions shall be deemed a violation of a material provision of this **Contract**.

36.2.4 Any person, or the employee, manager or owner of or officer of such firm or corporation who shall violate any of the provisions of this Article 36.2 shall, upon

conviction thereof, be punished by a fine of not more than one hundred (\$100.00) dollars or by imprisonment for not more than thirty (30) **Days**, or both.

36.3 This **Contract** is subject to the requirements of Executive Order No. 50 (1980) ("E.O. 50"), as revised, and the rules and regulations promulgated thereunder. No contract will be awarded unless and until these requirements have been complied with in their entirety. By signing this **Contract**, the **Contractor** agrees that it:

36.3.1 Will not engage in any unlawful discrimination against any employee or applicant for employment because of race, creed, color, national origin, sex, age, disability, marital status or sexual orientation with respect to all employment decisions including, but not limited to, recruitment, hiring, upgrading, demotion, downgrading, transfer, training, rates of pay or other forms of compensation, layoff, termination, and all other terms and conditions of employment; and

36.3.2 Will not engage in any unlawful discrimination in the selection of **Subcontractors** on the basis of the owner's race, color, creed, national origin, sex, age, disability, marital status or sexual orientation; and

36.3.3 Will state in all solicitations or advertisements for employees placed by or on behalf of the **Contractor** that all qualified applicants will receive consideration for employment without unlawful discrimination based on race, creed, color, national origin, sex, age, citizens status, disability, marital status, sexual orientation, or that it is an equal employment opportunity employer; and

36.3.4 Will send to each labor organization or representative of workers with which it has a collective bargaining agreement or other contract or memorandum of understanding, written notification of its equal employment opportunity commitments under E.O. 50 and the rules and regulations promulgated thereunder; and

36.3.5 Will furnish, before the award of the **Contract**, all information and reports, including an employment report, that are required by E.O. 50, the rules and regulations promulgated thereunder, and orders of the **City** Department of Business Services, Division of Labor Services (**DLS**) and will permit access to its books, records, and accounts by the **DLS** for the purposes of investigation to ascertain compliance with such rules, regulations, and orders.

36.4 The **Contractor** understands that in the event of its noncompliance with the nondiscrimination clauses of this **Contract** or with any of such rules, regulations, or orders, such noncompliance shall constitute a material breach of this **Contract** and noncompliance with E.O. 50 and the rules and regulations promulgated thereunder. After a hearing held pursuant to the rules of the **DLS**, the Director of the **DLS** may direct the **Commissioner** to impose any or all of the following sanctions:

36.4.1 Disapproval of the **Contractor**; and/or

36.4.2 Suspension or termination of the **Contract**; and/or

36.4.3 Declaring the **Contractor** in default; and/or

36.4.4 In lieu of any of the foregoing sanctions, the Director of the **DLS** may impose an employment program.

In addition to any actions taken under this **Contract**, failure to comply with E.O. 50 and the rules and regulations promulgated thereunder, in one or more instances, may result in a **City Agency** declaring the **Contractor** to be non-responsible in future procurements. The **Contractor** further agrees that it will refrain from entering into any **Contract** or **Contract** modification subject to E.O. 50 and the rules and regulations promulgated thereunder with a **Subcontractor** who is not in compliance with the requirements of E.O. 50 and the rules and regulations promulgated thereunder.

36.5 The **Contractor** specifically agrees, as required by Section 6-123 of the Administrative Code, that:

36.5.1 The **Contractor** will not engage in any unlawful discriminatory practice in violation of Title 8 of the Administrative Code; and

36.5.2 Any failure to comply with this Article 36.5 may subject the **Contractor** to the remedies set forth in Section 6-123 of the Administrative Code, including, where appropriate, sanctions such as withholding of payment, imposition of an employment program, finding the **Contractor** to be in default, cancellation of the **Contract**, or any other sanction or remedy provided by **Law** or **Contract**.

ARTICLE 37. LABOR LAW REQUIREMENTS

37.1 The **Contractor** shall strictly comply with all applicable provisions of the Labor Law, as amended. Such compliance is a material term of this **Contract**.

37.2 The **Contractor** specifically agrees, as required by Labor Law Sections 220 and 220-d, as amended, that:

37.2.1 Hours of **Work**: No laborer, worker, or mechanic in the employ of the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by this **Contract** shall be permitted or required to work more than eight (8) hours in any one (1) **Day**, or more than five (5) **Days** in any one (1) week, except as provided in the Labor Law and in cases of extraordinary emergency including fire, flood, or danger to life or property, or in the case of national emergency when so proclaimed by the President of the United States of America.

37.2.2 In situations in which there are not sufficient laborers, workers, and mechanics who may be employed to carry on expeditiously the **Work** contemplated by this **Contract** as a result of such restrictions upon the number of hours and **Days** of labor, and the immediate commencement or prosecution or completion without undue delay of the **Work** is necessary for the preservation of the **Site** and/or for the protection of the life and limb of the persons using the same, such laborers, workers, and mechanics shall be permitted or required to work more than eight (8) hours in any one (1) **Day**; or five (5) **Days** in any one (1) week; provided, however, that upon application of any **Contractor**, the **Commissioner** shall have first certified to the Commissioner of Labor of the State of New York (hereinafter "Commissioner of Labor") that such public **Work** is of an important nature and that a delay in carrying it to completion would result in serious disadvantage to the public; and provided, further, that such Commissioner of Labor shall have determined that such an emergency does in fact exist as provided in Labor Law Section 220.2.

37.2.3 Failure of the **Commissioner** to make such a certification to the Commissioner of Labor shall not entitle the **Contractor** to damages for delay or for any cause whatsoever.

37.2.4 Prevailing Rate of Wages: The wages to be paid for a legal day's **Work** to laborers, workers, or mechanics employed upon the **Work** contemplated by this **Contract** or upon any materials to be used thereon shall not be less than the "prevailing rate of wage" as defined in Labor Law Section 220, and as fixed by the **Comptroller** in the attached Schedule of Wage Rates and in updated schedules thereof. The prevailing wage rates and supplemental benefits to be paid are those in effect at the time the **Work** is being performed.

37.2.5 Requests for interpretation or correction in the Information for Bidders includes all requests for clarification of the classification of trades to be employed in the performance of the **Work** under this **Contract**. In the event that a trade not listed in the **Contract** is in fact employed during the performance of this **Contract**, the **Contractor** shall be required to obtain from the **Agency** the prevailing wage rates and supplementary benefits for the trades used and to complete the performance of this **Contract** at the price at which the **Contract** was awarded.

37.2.6 Minimum Wages: Except for employees whose wage is required to be fixed pursuant to Labor Law Section 220, all persons employed by the **Contractor** and any **Subcontractor** in the manufacture or furnishing of the supplies, materials, or equipment, or the furnishing of work, labor, or services, used in the performance of this **Contract**, shall be paid, without subsequent deduction or rebate unless expressly authorized by **Law**, not less than the sum mandated by **Law**.

37.3 Working Conditions: No part of the **Work**, labor or services shall be performed or rendered by the **Contractor** in any plants, factories, buildings or surroundings or under working conditions which are unsanitary or hazardous or dangerous to the health and safety of employees engaged in the performance of this **Contract**. Compliance with the safety, sanitary, and factory inspection **Laws** of the state in which the **Work** is to be performed shall be prima facie evidence of compliance with this Article 37.3.

37.4 Prevailing Wage Enforcement: The **Contractor** agrees to pay for all costs incurred by the **City** in enforcing prevailing wage requirements, including the cost of any investigation conducted by or on behalf of the **Agency** or the **Comptroller**, where the **City** discovers a failure to comply with any of the requirements of this Article 37 by the **Contractor** or its **Subcontractor(s)**. The **Contractor** also agrees that, should it fail or refuse to pay for any such investigation, the **Agency** is hereby authorized to deduct from a **Contractor's** account an amount equal to the cost of such investigation.

37.4.1 The Labor Law Section 220 and Section 220-d, as amended, provide that this **Contract** shall be forfeited and no sum paid for any **Work** done hereunder on a second conviction for willfully paying less than:

37.4.1(a) The stipulated prevailing wage scale as provided in Labor Law section 220, as amended, or

37.4.1(b) The stipulated minimum hourly wage scale as provided in Labor Law section 220-d, as amended.

37.4.2 For any breach or violation of either working conditions (Article 37.3) or minimum wages (Article 37.2.6) provisions, the party responsible therefor shall be liable to the **City** for liquidated damages, which may be withheld from any amounts due on any contracts with the **City** of such party responsible, or may be recovered in actions brought by the **City**

Corporation Counsel in the name of the **City**, in addition to damages for any other breach of this **Contract**, for a sum equal to the amount of any underpayment of wages due to any employee engaged in the performance of this **Contract**. In addition, the **Commissioner** shall have the right to cancel contracts and enter into other contracts for the completion of the original contract, with or without public letting, and the original **Contractor** shall be liable for any additional cost. All sums withheld or recovered as deductions, rebates, refunds, or underpayment of wages hereunder, shall be held in a special deposit account and shall be paid without interest, on order of the **Comptroller**, directly to the employees who have been paid less than minimum rates of pay as set forth herein and on whose account such sums were withheld or recovered, provided that no claims by employees for such payments shall be entertained unless made within two (2) years from the date of actual notice to the **Contractor** of the withholding or recovery of such sums by the **City**.

37.4.3 A determination by the **Comptroller** that a **Contractor** and/or its **Subcontractor** willfully violated Labor Law Section 220 will be forwarded to the **City's** five District Attorneys for review.

37.4.4 The **Contractor's** or **Subcontractor's** noncompliance with this Article 37.4 and Labor Law Section 220 may result in an unsatisfactory performance evaluation and the **Comptroller** may also find and determine that the **Contractor** or **Subcontractor** willfully violated the New York Labor Law.

37.4.4(a) An unsatisfactory performance evaluation for noncompliance with this Article 37.4 may result in a determination that the **Contractor** is a non-responsible bidder on subsequent procurements with the **City** and thus a rejection of a future award of a contract with the **City**, as well as any other sanctions provided for by Law.

37.4.4(b) Labor Law Section 220-b, as amended, provides that when two (2) final determinations have been rendered against a **Contractor** or **Subcontractor** within any consecutive six (6) year period determining that such **Contractor** or **Subcontractor** has willfully failed to pay the prevailing rate of wages or to provide supplements in accordance with the Labor Law and this Article 37.4, whether such failures were concurrent or consecutive and whether or not such final determinations concerning separate public works projects are rendered simultaneously, such **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the second final determination. If the final determination involves the falsification of payroll records or the kickback of wages or supplements, the **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the first final determination.

37.4.4(c) Labor Law Section 220, as amended, provides that the **Contractor** or **Subcontractor** found to have violated this Article 37.4 may be directed to make payment of wages or supplements including interest found to be due, and the **Contractor** or **Subcontractor** may be directed to make payment of a further sum as a civil penalty in an amount not exceeding twenty-five (25%) percent of the total amount found to be due.

37.5 The **Contractor** and its **Subcontractors** shall within ten (10) **Days** after mailing of a Notice of Award or written order, post in prominent and conspicuous places in each and every plant, factory, building, and structure where employees of the **Contractor** and its **Subcontractors** engaged in the

performance of this **Contract** are employed, notices furnished by the **City**, in relation to prevailing wages and supplements, minimum wages, and other stipulations contained in Sections 220 and 220-h of the Labor Law, and the **Contractor** and its **Subcontractors** shall continue to keep such notices posted in such prominent and conspicuous places until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services required to be furnished or rendered under this **Contract**.

37.6 The **Contractor** shall strictly comply with all of the provisions of Articles 37.6.1 through 37.6.5, and provide for all workers, laborers or mechanics in its employ, the following:

37.6.1 Notices Posted At **Site**: Post, in a location designated by the **City**, schedules of prevailing wages and supplements for this **Project**, a copy of all re-determinations of such schedules for the **Project**, the Workers' Compensation Law Section 51 notice, all other notices required by **Law** to be posted at the **Site**, the **City** notice that this **Project** is a public works project on which each worker is entitled to receive the prevailing wages and supplements for the occupation at which he or she is working, and all other notices which the **City** directs the **Contractor** to post. The **Contractor** shall provide a surface for such notices which is satisfactory to the **City**. The **Contractor** shall maintain and keep current such notices in a legible manner and shall replace any notice or schedule which is damaged, defaced, illegible or removed for any reason. The **Contractor** shall post such notices before commencing any **Work** on the **Site** and shall maintain such notices until all **Work** on the **Site** is complete; and

37.6.2 Daily **Site** Sign-in Sheets: Maintain daily **Site** sign-in sheets, and require that **Subcontractors** maintain daily **Site** sign-in sheets for its employees, which include blank spaces for an employee's name to be both printed and signed, job title, date started and Social Security number, the time the employee began work and the time the employee left work, until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services to be furnished or rendered under this **Contract** unless exception is granted by the **Comptroller** upon application by the **Agency**. In the alternative, subject to the approval of the **CCPO**, the **Contractor** and **Subcontractor** may maintain an electronic or biometric sign-in system, which provides the information required by this Article 37.6.2; and

37.6.3 Individual Employee Information Notices: Distribute a notice to each worker, laborer or mechanic employed under this **Contract**, in a form provided by the **Agency**, that this **Project** is a public works project on which each worker, laborer or mechanic is entitled to receive the prevailing rate of wages and supplements for the occupation at which he or she is working. If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, such notice shall also include a statement that each worker, laborer or mechanic must be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration. Such notice shall be distributed to each worker before he or she starts performing any **Work** of this **Contract** and with the first paycheck after July first of each year. "Worker, laborer or mechanic" includes employees of the **Contractor** and all **Subcontractors** and all employees of suppliers entering the **Site**. At the time of distribution, the **Contractor** shall have each worker, laborer or mechanic sign a statement, in a form provided by the **Agency**, certifying that the worker has received the notice required by this Article 37.6.3, which signed statement shall be maintained with the payroll records required by this **Contract**; and

37.6.3(a) The **Contractor** and each **Subcontractor** shall notify each worker, laborer or mechanic employed under this **Contract** in writing of the prevailing rate of

wages for their particular job classification. Such notification shall be given to every worker, laborer, and mechanic on their first pay stub and with every pay stub thereafter; and

37.6.4 **Site Laminated Identification Badges:** The **Contractor** shall provide laminated identification badges which include a photograph of the worker's, laborer's or mechanic's face and indicate the worker's, laborer's or mechanic's name, trade, employer's name, and employment starting date (month/day/year). Further, the **Contractor** shall require as a condition of employment on the **Site**, that each and every worker, laborer or mechanic wear the laminated identification badge at all times and that it may be seen by any representative of the **City**. The **Commissioner** may grant a written waiver from the requirement that the laminated identification badge include a photograph if the **Contractor** demonstrates that the identity of an individual wearing a laminated identification badge can be easily verified by another method; and

37.6.5 **Language Other Than English Used On Site:** Provide the **ACCO** notice when three (3) or more employees (worker and/or laborer and/or mechanic) on the **Site**, at any time, speak a language other than English. The **ACCO** will then provide the **Contractor** the notices described in Article 37.6.1 in that language or languages as may be required. The **Contractor** is responsible for all distributions under this Article 37; and

37.6.6 **Provision of Records:** The **Contractor** and **Subcontractor(s)** shall produce within five (5) **Days** on the **Site** of the **Work** and upon a written order of the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, or the **Comptroller**, such records as are required to be kept by this Article 37.6; and

37.6.7 The **Contractor** and **Subcontractor(s)** shall pay employees by check or direct deposit. If this **Contract** is for an amount greater than one million (\$1,000,000) dollars, checks issued by the **Contractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**). For any subcontract for an amount greater than seven hundred fifty thousand (\$750,000) dollars, checks issued by a **Subcontractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**); and

37.6.8 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 37.6.1 through 37.6.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.7 The **Contractor** and its **Subcontractors** shall keep such employment and payroll records as are required by Section 220 of the Labor Law. The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of this Article 37.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.8 At the time the **Contractor** makes application for each partial payment and for final payment, the **Contractor** shall submit to the **Commissioner** a written payroll certification, in the form provided by this **Contract**, of compliance with the prevailing wage, minimum wage, and other provisions and stipulations required by Labor Law Section 220 and of compliance with the training requirements of Labor Law Section 220-h set forth in Article 35.2. This certification of compliance shall be a condition precedent to payment and no payment shall be made to the **Contractor** unless and until each such certification shall have been submitted to and received by the **Commissioner**.

37.9 This **Contract** is executed by the **Contractor** with the express warranty and representation that the **Contractor** is not disqualified under the provisions of Section 220 of the Labor Law from the award of the **Contract**.

37.10 Any breach or violation of any of the foregoing shall be deemed a breach or violation of a material provision of this **Contract**, and grounds for cancellation thereof by the **City**.

ARTICLE 38. PAYROLL REPORTS

38.1 The **Contractor** and its **Subcontractor(s)** shall maintain on the **Site** during the performance of the **Work** the original payrolls or transcripts thereof which the **Contractor** and its **Subcontractor(s)** are required to maintain and shall submit such original payrolls or transcripts, subscribed and affirmed by it as true, within thirty (30) **Days** after issuance of its first payroll, and every thirty (30) **Days** thereafter, pursuant to Labor Law Section 220(3-a)(a)(iii). The **Contractor** and **Subcontractor(s)** shall submit such original payrolls or transcripts along with each and every payment requisition. If payment requisitions are not submitted at least once a month, the **Contractor** and its **Subcontractor(s)** shall submit original payrolls and transcripts both along with its payment requisitions and independently of its payment requisitions.

38.2 The **Contractor** shall maintain payrolls or transcripts thereof for six (6) years from the date of completion of the **Work** on this **Contract**. If such payrolls and transcripts are maintained outside of New York City after the completion of the **Work** and their production is required pursuant to this Article 38, the **Contractor** shall produce such records in New York City upon request by the **City**.

38.3 The **Contractor** and **Subcontractor(s)** shall comply with any written order, direction, or request made by the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)**, or the **Comptroller**, to provide to the requesting party any of the following information and/or records within five (5) **Days** of such written order, direction, or request:

38.3.1 Such original payrolls or transcripts thereof subscribed and affirmed by it as true and the statements signed by each worker pursuant to this Chapter VIII; and/or

38.3.2 Attendance sheets for each **Day** on which any employee of the **Contractor** and/or any of the **Subcontractor(s)** performed **Work** on the **Site**, which attendance sheet shall be in a form acceptable to the **Agency** and shall provide information acceptable to the **Agency** to identify each such employee; and/or

38.3.3 Any other information to satisfy the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)** or the **Comptroller**, that this Chapter VIII and the Labor Law, as to the hours of employment and prevailing rates of wages and/or supplemental benefits, are being observed.

38.4 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 38.1 and/or 38.2 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

ARTICLE 39. DUST HAZARDS

39.1 Should a harmful dust hazard be created in performing the **Work** of this **Contract**, for the elimination of which appliances or methods have been approved by the Board of Standards and Appeals

of the City of New York, such appliances and methods shall be installed, maintained, and effectively operated during the continuance of such harmful dust hazard. Failure to comply with this provision after notice shall make this **Contract** voidable at the sole discretion of the **City**.

CHAPTER IX: PARTIAL AND FINAL PAYMENTS

ARTICLE 40. CONTRACT PRICE

40.1 The **City** shall pay, and the **Contractor** agrees to accept, in full consideration for the **Contractor's** performance of the **Work** subject to the terms and conditions hereof, the lump sum price or unit prices for which this **Contract** was awarded, plus the amount required to be paid for any **Extra Work** ordered by the **Commissioner** under Article 25, less credit for any **Work** omitted pursuant to Article 29.

ARTICLE 41. BID BREAKDOWN ON LUMP SUM

41.1 Within fifteen (15) **Days** after the commencement date specified in the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Resident Engineer**, the **Contractor** shall submit to the **Resident Engineer** a breakdown of its bid price, or of lump sums bid for items of the **Contract**, showing the various operations to be performed under the **Contract**, as directed in the progress schedule required under Article 9, and the value of each of such operations, the total of such items to equal the lump sum price bid. Said breakdown must be approved in writing by the **Resident Engineer**.

41.2 No partial payment will be approved until the **Contractor** submits a bid breakdown that is acceptable to the **Resident Engineer**.

41.3 The **Contractor** shall also submit such other information relating to the bid breakdown as directed by the **Resident Engineer**. Thereafter, the breakdown may be used only for checking the **Contractor's** applications for partial payments hereunder, but shall not be binding upon the **City**, the **Commissioner**, or the **Engineer** for any purpose whatsoever.

ARTICLE 42. PARTIAL PAYMENTS

42.1 From time to time as the **Work** progresses satisfactorily, but not more often than once each calendar month (except where the **Commissioner** approves in writing the submission of invoices on a more frequent basis and for invoices relating to **Work** performed pursuant to a change order), the **Contractor** may submit to the **Engineer** a requisition for a partial payment in the prescribed form, which shall contain an estimate of the quantity and the fair value of the **Work** done during the payment period.

42.2 Partial payments may be made for materials, fixtures, and equipment in advance of their actual incorporation in the **Work**, as the **Commissioner** may approve, and upon the terms and conditions set forth in the General Conditions.

42.3 The **Contractor** shall also submit to the **Commissioner** in connection with every application for partial payment a verified statement in the form prescribed by the **Comptroller** setting forth the information required under Labor Law Section 220-a.

42.4 Within thirty (30) **Days** after receipt of a satisfactory payment application, and within sixty (60) **Days** after receipt of a satisfactory payment application in relation to **Work** performed pursuant to a change order, the **Engineer** will prepare and certify, and the **Commissioner** will approve, a voucher for a partial payment in the amount of such approved estimate, less any and all deductions authorized to be made by the **Commissioner** under the terms of this **Contract** or by **Law**.

ARTICLE 43. PROMPT PAYMENT

43.1 The Prompt Payment provisions of the **PPB** Rules in effect at the time of the bid will be applicable to payments made under this **Contract**. The provisions require the payment to the **Contractor** of interest on payments made after the required payment date, except as set forth in the **PPB** Rules.

43.2 The **Contractor** shall submit a proper invoice to receive payment, except where the **Contract** provides that the **Contractor** will be paid at predetermined intervals without having to submit an invoice for each scheduled payment.

43.3 Determination of interest due will be made in accordance with the **PPB** Rules.

43.4 If the **Contractor** is paid interest, the proportionate share(s) of that interest shall be forwarded by the **Contractor** to its **Subcontractor(s)**.

43.5 The **Contractor** shall pay each **Subcontractor** or **Materialman** not later than seven (7) **Days** after receipt of payment out of amounts paid to the **Contractor** by the **City** for **Work** performed by the **Subcontractor** or **Materialman** under this **Contract**.

43.5.1 If **Contractor** fails to make any payment to any **Subcontractor** or **Materialman** within seven (7) **Days** after receipt of payment by the **City** pursuant to this Article 43.5, then the **Contractor** shall pay interest on amounts due to such **Subcontractor** or **Materialman** at the rate of interest in effect on the date such payment is made by the **Contractor** computed in accordance with Section 756-b (1)(b) of the New York General Business Law. Accrual of interest shall commence on the **Day** immediately following the expiration of the seventh **Day** following receipt of payment by the **Contractor** from the **City** and shall end on the date on which payment is made.

43.6 The **Contractor** shall include in each of its subcontracts a provision requiring each **Subcontractor** to make payment to each of its **Subcontractors** or **Materialmen** for **Work** performed under this **Contract** in the same manner and within the same time period set forth above.

ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT

44.1 The **Contractor** shall submit with the **Substantial Completion** requisition:

44.1.1 A final verified statement of any pending Article 27 disputes in accordance with the **PPB** Rules and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the

Contractor claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay.

44.1.1(a) With respect to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City** Corporation Counsel shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 44.1.1(a) is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor** upon acceptance of the **Substantial Completion** payment pursuant to this Article 44, will have waived any such claims.

44.1.2 A **Final Approved Punch List**.

44.1.3 Where required, a request for an extension of time to achieve **Substantial Completion** or final extension of time.

44.2 The **Commissioner** shall issue a voucher calling for payment of any part or all of the balance due for **Work** performed under the **Contract**, including monies retained under Article 21, less any and all deductions authorized to be made by the **Commissioner**, under this **Contract** or by **Law**, and less twice the amount the **Commissioner** considers necessary to ensure the completion of the balance of the **Work** by the **Contractor**. Such a payment shall be considered a partial and not a final payment. No **Substantial Completion** payment shall be made under this Article 44 where the **Contractor** failed to complete the **Work** within the time fixed for such completion in the Schedule A of the General Conditions, or within the time to which completion may have been extended, until an extension or extensions of time for the completion of **Work** have been acted upon pursuant to Article 13.

44.3 No further partial payments shall be made to the **Contractor** after **Substantial Completion**, except the **Substantial Completion** payment and payment pursuant to any **Contractor's** requisition that were properly filed with the **Commissioner** prior to the date of **Substantial Completion**; however, the **Commissioner** may grant a waiver for further partial payments after the date of **Substantial Completion** to permit payments for change order **Work** and/or release of retainage and deposits pursuant to Articles 21 and 24. Such waiver shall be in writing.

44.4 The **Contractor** acknowledges that nothing contained in this Article 44 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 45. FINAL PAYMENT

45.1 After completion and **Final Acceptance** of the **Work**, the **Contractor** shall submit all required certificates and documents, together with a requisition for the balance claimed to be due under the **Contract**, less the amount authorized to be retained for maintenance under Article 24. Such submission shall be within 90 days of the date of the **Commissioner's** written determination of **Final Acceptance**, or within such additional time as may be granted by the **Commissioner** in writing. If the **Contractor** fails to submit all required certificates and documents within the time allowed, no payment of the balance claimed shall be made to the **Contractor** and the **Contractor** shall be deemed to have forfeited its right to payment of any balance claimed. A verified statement similar to that required in connection with applications for partial payments shall also be submitted to the **Commissioner**.

45.2 Amended Verified Statement of Claims: The **Contractor** shall also submit with the final requisition any amendments to the final verified statement of any pending dispute resolution procedures in accordance with the **PPB Rules** and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) that have occurred subsequent to **Substantial Completion**, setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each such item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay. With reference to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City Corporation Counsel** shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 45.2, is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor**, upon acceptance of the Final Payment pursuant to Article 46, will have waived any such claims.

45.3 Preparation of Final Voucher: Upon determining the balance due hereunder other than on account of claims, the **Engineer** will prepare and certify, for the **Commissioner's** approval, a voucher for final payment in that amount less any and all deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**. In the case of a lump sum **Contract**, the **Commissioner** shall certify the voucher for final payment within thirty (30) **Days** from the date of completion and acceptance of the **Work**, provided all requests for extensions of time have been acted upon.

45.3.1 All prior certificates and vouchers upon which partial payments were made, being merely estimates made to enable the **Contractor** to prosecute the **Work** more advantageously, shall be subject to correction in the final voucher, and the certification of the **Engineer** thereon and the approval of the **Commissioner** thereof, shall be conditions precedent to the right of the **Contractor** to receive any money hereunder. Such final voucher shall be binding and conclusive upon the **Contractor**.

45.3.2 Payment pursuant to such final voucher, less any deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**, shall constitute the final payment, and shall be made by the **Comptroller** within thirty (30) **Days** after the filing of such voucher in his/her office.

45.4 The **Contractor** acknowledges that nothing contained in this Article 45 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT

46.1 The acceptance by the **Contractor**, or by anyone claiming by or through it, of the final payment, whether such payment be made pursuant to any judgment of any court, or otherwise, shall constitute and operate as a release of the **City** from any and all claims of and liability to the **Contractor** for anything heretofore done or furnished for the **Contractor** relating to or arising out of this **Contract** and the **Work** done hereunder, and for any prior act, neglect or default on the part of the **City** or any of its officials, agents or employees, excepting only a claim against the **City** for the amounts deducted or retained in accordance with the terms and provisions of this **Contract** or by **Law**, and excepting any claims, not otherwise waived, or any pending dispute resolution procedures which are contained in the

verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45.

46.2 The **Contractor** is warned that the execution by it of a release, in connection with the acceptance of the final payment, containing language purporting to reserve claims other than those herein specifically excepted from the operation of this Article 46, or those for amounts deducted by the **Commissioner** from the final requisition or from the final payment as certified by the **Engineer** and approved by the **Commissioner**, shall not be effective to reserve such claims, anything stated to the **Contractor** orally or in writing by any official, agent or employee of the **City** to the contrary notwithstanding.

46.3 Should the **Contractor** refuse to accept the final payment as tendered by the **Comptroller**, it shall constitute a waiver of any right to interest thereon.

46.4 The **Contractor**, however, shall not be barred by this Article 46 from commencing an action for breach of **Contract** to the extent permitted by **Law** and by the terms of the **Contract** for any claims that are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45 or that arose after submission of the final payment requisition, provided that a detailed and verified statement of claim is served upon the contracting **Agency** and **Comptroller** not later than forty (40) **Days** after the making of such final payment by electronic funds transfer (EFT) or the mailing of such final payment. The statement shall specify the items upon which the claim will be based and any such claim shall be limited to such items.

ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION

47.1 All works of art, including paintings, mural decorations, stained glass, statues, bas-reliefs, and other sculptures, monuments, fountains, arches, and other structures of a permanent character intended for ornament or commemoration, and every design of the same to be used in the performance of this **Contract**, and the design of all bridges, approaches, buildings, gates, fences, lamps, or structures to be erected, pursuant to the terms of this **Contract**, shall be submitted to the Art Commission, d/b/a the Public Design Commission of the City of New York, and shall be approved by the Public Design Commission prior to the erection or placing in position of the same. The final payment shall not become due or payable under this **Contract** unless and until the Public Design Commission shall certify that the design for the **Work** herein contracted for has been approved by the said Public Design Commission, and that the same has been executed in substantial accordance with the design so approved, pursuant to the provisions of Chapter 37, Section 854 of the **City** Charter, as amended.

CHAPTER X: CONTRACTOR'S DEFAULT

ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT

48.1 In addition to those instances specifically referred to in other Articles herein, the **Commissioner** shall have the right to declare the **Contractor** in default of this **Contract** if:

48.1.1 The **Contractor** fails to commence **Work** when notified to do so by the **Commissioner**; or if

48.1.2 The **Contractor** shall abandon the **Work**; or if

48.1.3 The **Contractor** shall refuse to proceed with the **Work** when and as directed by the **Commissioner**; or if

48.1.4 The **Contractor** shall, without just cause, reduce its working force to a number which, if maintained, would be insufficient, in the opinion of the **Commissioner**, to complete the **Work** in accordance with the progress schedule; or if

48.1.5 The **Contractor** shall fail or refuse to increase sufficiently such working force when ordered to do so by the **Commissioner**; or if

48.1.6 The **Contractor** shall sublet, assign, transfer, convert or otherwise dispose of this **Contract** other than as herein specified; or sell or assign a majority interest in the **Contractor**; or if

48.1.7 The **Contractor** fails to secure and maintain all required insurance; or if

48.1.8 A receiver or receivers are appointed to take charge of the **Contractor's** property or affairs; or if

48.1.9 The **Commissioner** shall be of the opinion that the **Contractor** is or has been unnecessarily or unreasonably or willfully delaying the performance and completion of the **Work**, or the award of necessary subcontracts, or the placing of necessary material and equipment orders; or if

48.1.10 The **Commissioner** shall be of the opinion that the **Contractor** is or has been willfully or in bad faith violating any of the provisions of this **Contract**; or if

48.1.11 The **Commissioner** shall be of the opinion that the **Work** cannot be completed within the time herein provided therefor or within the time to which such completion may have been extended; provided, however, that the impossibility of timely completion is, in the **Commissioner's** opinion, attributable to conditions within the **Contractor's** control; or if

48.1.12 The **Work** is not completed within the time herein provided therefor or within the time to which the **Contractor** may be entitled to have such completion extended; or if

48.1.13 Any statement or representation of the **Contractor** in the **Contract** or in any document submitted by the **Contractor** with respect to the **Work**, the **Project**, or the **Contract** (or for purposes of securing the **Contract**) was untrue or incorrect when made; or if

48.1.14 The **Contractor** or any of its officers, directors, partners, five (5%) percent shareholders, principals, or other persons substantially involved in its activities, commits any of the acts or omissions specified as the grounds for debarment in the **PPB** Rules.

48.2 Before the **Commissioner** shall exercise his/her right to declare the **Contractor** in default, the **Commissioner** shall give the **Contractor** an opportunity to be heard, upon not less than two (2) **Days'** notice.

ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT

49.1 The right to declare the **Contractor** in default for any of the grounds specified or referred to in Article 48 shall be exercised by sending the **Contractor** a notice, signed by the **Commissioner**, setting forth the ground or grounds upon which such default is declared (hereinafter referred to as a "Notice of Default").

49.2 The **Commissioner's** determination that the **Contractor** is in default shall be conclusive, final, and binding on the parties and such a finding shall preclude the **Contractor** from commencing a plenary action for any damages relating to the **Contract**. If the **Contractor** protests the determination of the **Commissioner**, the **Contractor** may commence an action in a court of competent jurisdiction of the State of New York under Article 78 of the New York Civil Practice Law and Rules.

ARTICLE 50. QUITTING THE SITE

50.1 Upon receipt of such notice the **Contractor** shall immediately discontinue all further operations under this **Contract** and shall immediately quit the **Site**, leaving untouched all plant, materials, equipment, tools, and supplies then on the **Site**.

ARTICLE 51. COMPLETION OF THE WORK

51.1 The **Commissioner**, after declaring the **Contractor** in default, may then have the **Work** completed by such means and in such manner, by contract with or without public letting, or otherwise, as he/she may deem advisable, utilizing for such purpose such of the **Contractor's** plant, materials, equipment, tools, and supplies remaining on the **Site**, and also such **Subcontractors**, as he/she may deem advisable.

51.2 After such completion, the **Commissioner** shall make a certificate stating the expense incurred in such completion, which shall include the cost of re-letting and also the total amount of liquidated damages (at the rate provided for in the **Contract**) from the date when the **Work** should have been completed by the **Contractor** in accordance with the terms hereof to the date of actual completion of the **Work**. Such certificate shall be binding and conclusive upon the **Contractor**, its sureties, and any person claiming under the **Contractor**, as to the amount thereof.

51.3 The expense of such completion, including any and all related and incidental costs, as so certified by the **Commissioner**, and any liquidated damages assessed against the **Contractor**, shall be charged against and deducted out of monies which are earned by the **Contractor** prior to the date of default. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

ARTICLE 52. PARTIAL DEFAULT

52.1 In case the **Commissioner** shall declare the **Contractor** in default as to a part of the **Work** only, the **Contractor** shall discontinue such part, shall continue performing the remainder of the **Work** in strict conformity with the terms of this **Contract**, and shall in no way hinder or interfere with any **Other Contractor(s)** or persons whom the **Commissioner** may engage to complete the **Work** as to which the **Contractor** was declared in default.

52.2 The provisions of this Chapter relating to declaring the **Contractor** in default as to the entire **Work** shall be equally applicable to a declaration of partial default, except that the **Commissioner** shall be entitled to utilize for completion of the part of the **Work** as to which the **Contractor** was declared in default only such plant, materials, equipment, tools, and supplies as had been previously used by the **Contractor** on such part.

ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK

53.1 In completing the whole or any part of the **Work** under the provisions of this Chapter X, the **Commissioner** shall have the power to depart from or change or vary the terms and provisions of this **Contract**, provided, however, that such departure, change or variation is made for the purpose of reducing the time or expense of such completion. Such departure, change or variation, even to the extent of accepting a lesser or different performance, shall not affect the conclusiveness of the **Commissioner's** certificate of the cost of completion referred to in Article 51, nor shall it constitute a defense to an action to recover the amount by which such certificate exceeds the amount which would have been payable to the **Contractor** hereunder but for its default.

ARTICLE 54. OTHER REMEDIES

54.1 In addition to the right to declare the **Contractor** in default pursuant to this Chapter X, the **Commissioner** shall have the absolute right, in his/her sole discretion and without a hearing, to complete or cause to be completed in the same manner as described in Articles 51 and 53, any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List**. A written notice of the exercise of this right shall be sent to the **Contractor** who shall immediately quit the **Site** in accordance with the provisions of Article 50.

54.2 The expense of completion permitted under Article 54.1, including any and all related and incidental costs, as so certified by the **Commissioner**, shall be charged against and deducted out of monies which have been earned by the **Contractor** prior to the date of the exercise of the right set forth in Article 54.1; the balance of such monies, if any, subject to the other provisions of this **Contract**, to be paid to the **Contractor** without interest after such completion. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

54.3 The previous provisions of this Chapter X shall be in addition to any and all other remedies available under **Law** or in equity.

54.4 The exercise by the **City** of any remedy set forth herein shall not be deemed a waiver by the **City** of any other legal or equitable remedy contained in this **Contract** or provided under **Law**.

CHAPTER XI: MISCELLANEOUS PROVISIONS

ARTICLE 55. CONTRACTOR'S WARRANTIES

55.1 In consideration of, and to induce, the award of this **Contract** to the **Contractor**, the **Contractor** represents and warrants:

55.1.1 That it is financially solvent, sufficiently experienced and competent to perform the **Work**; and

55.1.2 That the facts stated in its bid and the information given by it pursuant to the Information for Bidders is true and correct in all respects; and

55.1.3 That it has read and complied with all requirements set forth in the **Contract**.

ARTICLE 56. CLAIMS AND ACTIONS THEREON

56.1 Any claim, that is not subject to dispute resolution under the **PPB** Rules or this **Contract**, against the **City** for damages for breach of **Contract** shall not be made or asserted in any action, unless the **Contractor** shall have strictly complied with all requirements relating to the giving of notice and of information with respect to such claims, as herein before provided.

56.2 Nor shall any action be instituted or maintained on any such claims unless such action is commenced within six (6) months after **Substantial Completion**; except that:

56.2.1 Any claims arising out of events occurring after **Substantial Completion** and before **Final Acceptance** of the **Work** shall be asserted within six (6) months of **Final Acceptance** of the **Work**;

56.2.2 If the **Commissioner** exercises his/her right to complete or cause to complete any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List** pursuant to Article 54, any such action shall be commenced within six (6) months from the date the **Commissioner** notifies the **Contractor** in writing that he/she has exercised such right. Any claims for monies deducted, retained or withheld under the provisions of this **Contract** shall be asserted within six (6) months after the date when such monies otherwise become due and payable hereunder; and

56.2.3 If the **Commissioner** exercises his/her right to terminate the **Contract** pursuant to Article 64, any such action shall be commenced within six (6) months of the date the **Commissioner** exercises said right.

ARTICLE 57. INFRINGEMENT

57.1 The **Contractor** shall be solely responsible for and shall defend, indemnify, and hold the **City** harmless from any and all claims (even if the allegations of the lawsuit are without merit) and judgments for damages and from costs and expenses to which the **City** may be subject to or which it may suffer or incur allegedly arising out of or in connection with any infringement by the **Contractor** of any copyright, trade secrets, trademark or patent rights or any other property or personal right of any third party by the **Contractor** and/or its **Subcontractors** in the performance or completion of the **Work**. Insofar as the facts or **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent permitted by **Law**.

ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES

58.1 No claim whatsoever shall be made by the **Contractor** against any official, agent or employee of the **City** for, or on account of, anything done or omitted to be done in connection with this **Contract**.

ARTICLE 59. SERVICE OF NOTICES

59.1 The **Contractor** hereby designates the business address, fax number, and email address specified in its bid, as the place where all notices, directions or other communications to the **Contractor** may be delivered, or to which they may be mailed. Any notice, direction, or communication from either party to the other shall be in writing and shall be deemed to have been given when (i) delivered personally; (ii) sent by certified mail, return receipt requested; (iii) delivered by overnight or same day courier service in a properly addressed envelope with confirmation; or (iv) sent by fax or email and, unless receipt of the fax or e-mail is acknowledged by the recipient by fax or e-mail, deposited in a post office box regularly maintained by the United States Postal Service in a properly addressed, postage pre-paid envelope.

59.2 **Contractor's** notice address, email address, or fax number may be changed at any time by an instrument in writing, executed and acknowledged by the **Contractor**, and delivered to the **Commissioner**.

59.3 Nothing herein contained shall, however, be deemed to preclude or render inoperative the service of any notice, direction or other communication upon the **Contractor** personally, or, if the **Contractor** is a corporation, upon any officer thereof.

ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT

60.1 If this **Contract** contains any unlawful provision not an essential part of the **Contract** and which shall not appear to have been a controlling or material inducement to the making thereof, the same shall be deemed of no effect and shall, upon notice by either party, be deemed stricken from the **Contract** without affecting the binding force of the remainder.

ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED

61.1 It is the intent and understanding of the parties to this **Contract** that each and every provision of **Law** required to be inserted in this **Contract** shall be and is inserted herein. Furthermore, it is hereby stipulated that every such provision is to be deemed to be inserted herein, and if, through mistake or otherwise, any such provision is not inserted, or is not inserted in correct form, then this **Contract** shall forthwith upon the application of either party be amended by such insertion so as to comply strictly with the **Law** and without prejudice to the rights of either party hereunder.

ARTICLE 62. TAX EXEMPTION

62.1 The **City** is exempt from payment of Federal, State, and local taxes, including sales and compensating use taxes of the State of New York and its cities and counties on all tangible personal property sold to the **City** pursuant to the provisions of this **Contract**. These taxes are not to be included in bids. However, this exemption does not apply to tools, machinery, equipment or other property leased by or to the **Contractor**, **Subcontractor** or **Materialman** or to tangible personal property which, even

though it is consumed, is not incorporated into the completed **Work** (consumable supplies) and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**. The **Contractor** and its **Subcontractors** and **Materialmen** shall be responsible for and pay any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property and upon all such consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**.

62.2 The **Contractor** agrees to sell and the **City** agrees to purchase all tangible personal property, other than consumable supplies and other tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**, that is required, necessary or proper for or incidental to the construction of the **Project** covered by this **Contract**. The sum paid under this **Contract** for such tangible personal property shall be in full payment and consideration for the sale of such tangible personal property.

62.2.1 The **Contractor** agrees to construct the **Project** and to perform all **Work**, labor and services rendered, necessary, proper or incidental thereto for the sum shown in the bid for the performance of such **Work**, labor, and services, and the sum so paid pursuant to this **Contract** for such **Work**, labor, and services, shall be in full consideration for the performance by the **Contractor** of all its duties and obligations under this **Contract** in connection with said **Work**, labor, and services.

62.3 20 NYCRR Section 541.3(d) provides that a **Contractor's** purchases of tangible personal property that is either incorporated into real property owned by a governmental entity or purchased for and sold to a governmental entity are exempt from sales and use tax. The **City** shall not pay sales tax for any such tangible personal property that it purchases from the **Contractor** pursuant to the **Contract**. With respect to such tangible personal property, the **Contractor**, at the request of the **City**, shall furnish to the **City** such bills of sale and other instruments as may be required by the **City**, properly executed, acknowledged and delivered assuring to the **City** title to such tangible personal property, free of liens and/or encumbrances, and the **Contractor** shall mark or otherwise identify all such tangible personal property as the property of the **City**.

62.4 Title to all tangible personal property to be sold by the **Contractor** to the **City** pursuant to the provisions of the **Contract** shall immediately vest in and become the sole property of the **City** upon delivery of such tangible personal property to the **Site**. Notwithstanding such transfer of title, the **Contractor** shall have the full and continuing responsibility to install such tangible personal property in accordance with the provisions of this **Contract**, protect it, maintain it in a proper condition and forthwith repair, replace and make good any damage thereto, theft or disappearance thereof, and furnish additional tangible personal property in place of any that may be lost, stolen or rendered unusable, without cost to the **City**, until such time as the **Work** covered by the **Contract** is fully accepted by the **City**. Such transfer of title shall in no way affect any of the **Contractor's** obligations hereunder. In the event that, after title has passed to the **City**, any of the tangible personal property is rejected as being defective or otherwise unsatisfactory, title to all such tangible personal property shall be deemed to have been transferred back to the **Contractor**.

62.5 The purchase by **Subcontractors** or **Materialmen** of tangible personal property to be sold hereunder shall be a purchase or procurement for resale to the **Contractor** (either directly or through other **Subcontractors**) and therefore not subject to the aforesaid sales and compensating use taxes, provided that the subcontracts and purchase agreements provide for the resale of such tangible personal property and that such subcontracts and purchase agreements are in a form similar to this **Contract** with respect to the separation of the sale of consumable supplies and tangible personal property that the

Contractor is required to remove from the **Site** during or upon completion of the **Work** from the **Work** and labor, services, and any other matters to be provided, and provided further that the subcontracts and purchase agreements provide separate prices for tangible personal property and all other services and matters. Such separation shall actually be followed in practice, including the separation of payments for tangible personal property from the payments for other **Work** and labor and other things to be provided.

62.6 The **Contractor** and its **Subcontractors** and **Materialmen** shall furnish a **Contractor** Exempt Purchase Certificate to all persons, firms or corporations from which they purchase tangible personal property for the performance of the **Work** covered by this **Contract**.

62.7 In the event any of the provisions of this Article 62 shall be deemed to be in conflict with any other provisions of this **Contract** or create any ambiguity, then the provisions of this Article 62 shall control.

ARTICLE 63. INVESTIGATION(S) CLAUSE

63.1 The parties to this **Contract** agree to cooperate fully and faithfully with any investigation, audit or inquiry conducted by a United States, a State of New York (State) or a **City** governmental agency or authority that is empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath, or conducted by the Inspector General of a governmental agency that is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit or license that is the subject of the investigation, audit or inquiry.

63.2 If any person who has been advised that his/her statement, and any information from such statement, will not be used against him/her in any subsequent criminal proceeding refuses to testify before a grand jury or other governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath concerning the award of or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision or public authority thereof, or the Port Authority of New York and New Jersey, or any local development corporation within the **City**, or any public benefit corporation organized under the **Laws** of the State of New York, or;

63.3 If any person refuses to testify for a reason other than the assertion of his/her privilege against self incrimination in an investigation, audit or inquiry conducted by a **City** or State governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to take testimony under oath, or by the Inspector General of the governmental agency that is a party in interest in, and is seeking testimony concerning the award of, or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision thereof or any local development corporation within the **City**, then;

63.4 The **Commissioner** whose **Agency** is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit, or license shall convene a hearing, upon not less than five (5) **Days**' written notice to the parties involved to determine if any penalties should attach for the failure of a person to testify.

63.5 If any non-governmental party to the hearing requests an adjournment, the **Commissioner** who convened the hearing may, upon granting the adjournment, suspend any contract, lease, permit, or license, pending the final determination pursuant to Article 63.7 without the **City** incurring any penalty or damages for delay or otherwise.

63.6 The penalties which may attach after a final determination by the **Commissioner** may include but shall not exceed:

63.6.1 The disqualification for a period not to exceed five (5) years from the date of an adverse determination for any person, or any entity of which such person was a member at the time the testimony was sought, from submitting bids for, or transacting business with, or entering into or obtaining any contract, lease, permit or license with or from the **City**; and/or

63.6.2 The cancellation or termination of any and all such existing **City** contracts, leases, permits or licenses that the refusal to testify concerns and that have not been assigned as permitted under this **Contract**, nor the proceeds of which pledged, to an unaffiliated and unrelated institutional lender for fair value prior to the issuance of the notice scheduling the hearing, without the **City** incurring any penalty or damages on account of such cancellation or termination; monies lawfully due for goods delivered, work done, rentals, or fees accrued prior to the cancellation or termination shall be paid by the **City**.

63.7 The **Commissioner** shall consider and address in reaching his/her determination and in assessing an appropriate penalty the factors in Articles 63.7.1 and 63.7.2. The **Commissioner** may also consider, if relevant and appropriate, the criteria established in Articles 63.7.3 and 63.7.4, in addition to any other information which may be relevant and appropriate:

63.7.1 The party's good faith endeavors or lack thereof to cooperate fully and faithfully with any governmental investigation or audit, including but not limited to the discipline, discharge, or disassociation of any person failing to testify, the production of accurate and complete books and records, and the forthcoming testimony of all other members, agents, assignees or fiduciaries whose testimony is sought.

63.7.2 The relationship of the person who refused to testify to any entity that is a party to the hearing, including but not limited to, whether the person whose testimony is sought has an ownership interest in the entity and/or the degree of authority and responsibility the person has within the entity.

63.7.3 The nexus of the testimony sought to the subject entity and its contracts, leases, permits or licenses with the **City**.

63.7.4 The effect a penalty may have on an unaffiliated and unrelated party or entity that has a significant interest in an entity subject to penalties under Article 63.6, provided that the party or entity has given actual notice to the **Commissioner** upon the acquisition of the interest, or at the hearing called for in Article 63.4, gives notice and proves that such interest was previously acquired. Under either circumstance the party or entity shall present evidence at the hearing demonstrating the potential adverse impact a penalty will have on such person or entity.

63.8 Definitions:

63.8.1 The term "license" or "permit" as used in this Article 63 shall be defined as a license, permit, franchise or concession not granted as a matter of right.

63.8.2 The term "person" as used in this Article 63 shall be defined as any natural person doing business alone or associated with another person or entity as a partner, director, officer, principal or employee.

63.8.3 The term "entity" as used in this Article 63 shall be defined as any firm, partnership, corporation, association, joint venture, or person that receives monies, benefits, licenses, leases, or permits from or through the **City** or otherwise transacts business with the **City**.

63.8.4 The term "member" as used in this Article 63 shall be defined as any person associated with another person or entity as a partner, director, officer, principal or employee.

63.9 In addition to and notwithstanding any other provision of this **Contract**, the **Commissioner** may in his/her sole discretion terminate this **Contract** upon not less than three (3) **Days**' written notice in the event the **Contractor** fails to promptly report in writing to the **Commissioner** of the Department of Investigations ("DOI") of the **City** any solicitation of money, goods, requests for future employment or other benefit or thing of value, by or on behalf of any employee of the **City** or other person, firm, corporation or entity for any purpose which may be related to the procurement or obtaining of this **Contract** by the **Contractor**, or affecting the performance of this **Contract**.

ARTICLE 64. TERMINATION BY THE CITY

64.1 In addition to termination pursuant to any other article of this **Contract**, the **Commissioner** may, at any time, terminate this **Contract** by written notice to the **Contractor**. In the event of termination, the **Contractor** shall, upon receipt of such notice, unless otherwise directed by the **Commissioner**:

64.1.1 Stop **Work** on the date specified in the notice;

64.1.2 Take such action as may be necessary for the protection and preservation of the **City's** materials and property;

64.1.3 Cancel all cancelable orders for material and equipment;

64.1.4 Assign to the **City** and deliver to the **Site** or another location designated by the **Commissioner**, any non-cancelable orders for material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract** and not incorporated in the **Work**;

64.1.5 Take no action which will increase the amounts payable by the **City** under this **Contract**.

64.2 In the event of termination by the **City** pursuant to this Article 64, payment to the **Contractor** shall be in accordance with Articles 64.2.1, 64.2.2 or 64.2.3, to the extent that each respective article applies.

64.2.1 Lump Sum Contracts or Items: On all lump sum **Contracts**, or on lump sum items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.1(a) and 64.2.1(b), less all payments previously made pursuant to this **Contract**. On lump sum **Contracts** only, the **City** will also pay the **Contractor** an additional sum as provided in Article 64.2.1(c).

64.2.1(a) For **Work** completed prior to the notice of termination, the **Contractor** shall be paid a pro rata portion of the lump sum bid amount, plus approved change orders, based upon the percent completion of the **Work**, as determined by the

Commissioner. For the purpose of determining the pro rata portion of the lump sum bid amount to which the **Contractor** is entitled, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be dispositive. The **Commissioner's** determination hereunder shall be final, binding, and conclusive.

64.2.1(b) For non-cancelable material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated in the **Work**, the **Contractor** shall be paid the lesser of the following, less salvage value:

64.2.1(b)(i) The Direct Cost, as defined in Article 64.2.4; or

64.2.1(b)(ii) The fair and reasonable value, if less than Direct Cost, of such material and equipment, plus necessary and reasonable delivery costs.

64.2.1(b)(iii) In addition, the **Contractor** shall be paid five (5%) percent of the amount described in Article 64.2.1(b)(i) or Article 64.2.1(b)(ii), whichever applies.

64.2.1(c) Except as otherwise provided in Article 64.2.1(d), on all lump sum **Contracts**, the **Contractor** shall be paid the percentage indicated below applied to the difference between the total lump sum bid amount and the total of all payments made prior to the notice of termination plus all payments allowed pursuant to Articles 64.2.1(a) and 64.2.1(b):

64.2.1(c)(i) Five (5%) percent of the first five million (\$5,000,000) dollars; and

64.2.1(c)(ii) Three (3%) percent of any amount between five million (\$5,000,000) dollars and fifteen million (\$15,000,000) dollars; plus

64.2.1(c)(iii) One (1%) percent of any amount over fifteen million (\$15,000,000) dollars.

64.2.1(d) In the event the **City** terminates a lump sum **Contract** pursuant to this Article 64 within ninety (90) **Days** after registration of the **Contract** with the **Comptroller**, the **Contractor** shall be paid one (1%) percent of the difference between the lump sum bid amount and the total of all payments made pursuant to this Article 64.2.

64.2.2 Unit Price Contracts or Items: On all unit price **Contracts**, or on unit price items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.2(a) and 64.2.2(b), less all payments previously made pursuant to this **Contract**:

64.2.2(a) For all completed units, the unit price stated in the **Contract**, and

64.2.2(b) For units that have been ordered but are only partially completed, the **Contractor** will be paid:

64.2.2(b)(i) A pro rata portion of the unit price stated in the **Contract** based upon the percent completion of the unit and

64.2.2(b)(ii) For non-cancelable material and equipment, payment will be made pursuant to Article 64.2.1(b).

64.2.3 Time and Materials Contracts or Items Based on Time and Material Records: On all **Contracts** or items in a **Contract** where payment for the **Work** is based on time and material records, the **Contractor** shall be paid in accordance with Article 26, less all payments previously made pursuant to this **Contract**.

64.2.4 Direct Costs: Direct Costs as used in this Article 64.2 shall mean:

64.2.4(a) The actual purchase price of material and equipment, plus necessary and reasonable delivery costs,

64.2.4(b) The actual cost of labor involved in construction and installation at the **Site**, and

64.2.4(c) The actual cost of necessary bonds and insurance purchased pursuant to requirements of this **Contract** less any amounts that have been or should be refunded by the **Contractor's** sureties or insurance carriers.

64.2.4(d) Direct Costs shall not include overhead.

64.3 In no event shall any payments under this Article 64 exceed the **Contract** price for such items.

64.4 All payments pursuant to Article 64 shall be in the nature of liquidated damages and shall be accepted by the **Contractor** in full satisfaction of all claims against the **City**.

64.5 The **City** may deduct or set off against any sums due and payable pursuant to this Article 64, any deductions authorized by this **Contract** or by **Law** (including but not limited to liquidated damages) and any claims it may have against the **Contractor**. The **City's** exercise of the right to terminate the **Contract** pursuant to this Article 64 shall not impair or otherwise effect the **City's** right to assert any claims it may have against the **Contractor** in a plenary action.

64.6 Where the **Work** covered by the **Contract** has been substantially completed, as determined in writing by the **Commissioner**, termination of the **Work** shall be handled as an omission of **Work** pursuant to Articles 29 and 33, in which case a change order will be issued to reflect an appropriate reduction in the **Contract** sum, or if the amount is determined after final payment, such amount shall be paid by the **Contractor**.

ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE

65.1 This **Contract** shall be deemed to be executed in the **City** regardless of the domicile of the **Contractor**, and shall be governed by and construed in accordance with the **Laws** of the State of New York and the **Laws** of the United States, where applicable.

65.2 The parties agree that any and all claims asserted against the **City** arising under this **Contract** or related thereto shall be heard and determined in the courts of the State of New York ("New York State Courts") located in the **City** and County of New York. To effect this **Contract** and intent, the **Contractor** agrees:

65.2.1 If the **City** initiates any action against the **Contractor** in Federal court or in a New York State Court, service of process may be made on the **Contractor** either in person, wherever such **Contractor** may be found, or by registered mail addressed to the **Contractor** at its address as set forth in this **Contract**, or to such other address as the **Contractor** may provide to the **City** in writing; and

65.2.2 With respect to any action between the **City** and the **Contractor** in a New York State Court, the **Contractor** hereby expressly waives and relinquishes any rights it might otherwise have:

65.2.2(a) To move to dismiss on grounds of forum non conveniens;

65.2.2(b) To remove to Federal Court; and

65.2.2(c) To move for a change of venue to a New York State Court outside New York County.

65.2.3 With respect to any action brought by the **City** against the **Contractor** in a Federal Court located in the **City**, the **Contractor** expressly waives and relinquishes any right it might otherwise have to move to transfer the action to a Federal Court outside the **City**.

65.2.4 If the **Contractor** commences any action against the **City** in a court located other than in the **City** and County of New York, upon request of the **City**, the **Contractor** shall either consent to a transfer of the action to a New York State Court of competent jurisdiction located in the **City** and County of New York or, if the Court where the action is initially brought will not or cannot transfer the action, the **Contractor** shall consent to dismiss such action without prejudice and may thereafter reinstate the action in a New York State Court of competent jurisdiction in New York County.

65.3 If any provision(s) of this Article 65 is held unenforceable for any reason, each and all other provision(s) shall nevertheless remain in full force and effect.

ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT

66.1 The **Contractor** agrees that neither the **Contractor** nor any substantially owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the Federal Export Administration Act of 1979, as amended, or the regulations of the United States Department of Commerce (Commerce Department) promulgated thereunder.

66.2 Upon the final determination by the Commerce Department or any other agency of the United States as to, or conviction of the **Contractor** or a substantially-owned affiliated company thereof for participation in an international boycott in violation of the provisions of the Export Administration Act of 1979, as amended, or the regulations promulgated thereunder, the **Comptroller** may, at his/her option, render forfeit and void this **Contract**.

66.3 The **Contractor** shall comply in all respects, with the provisions of Section 6-114 of the Administrative Code and the rules and regulations issued by the **Comptroller** thereunder.

ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM

67.1 This **Contract** is subject to the requirements of Section 6-108.1 of the Administrative Code and regulations promulgated thereunder. No construction contract shall be awarded unless and until these requirements have been complied with in their entirety; however, compliance with this Article 67 is not required if the Agency sets Subcontractor Participation Goals for Minority- and Women-Owned Business Enterprises (M/WBEs).

67.2 Unless specifically waived by the **Commissioner** with the approval of the Division of Economic and Financial Opportunity of the **City** Department of Business Services, if any portion of the **Contract** is subcontracted, not less than ten (10%) percent of the total dollar amount of the **Contract** shall be awarded to locally based enterprises (LBEs); except that where less than ten (10%) percent of the total dollar amount of the **Contract** is subcontracted, such lesser percentage shall be so awarded.

67.3 The **Contractor** shall not require performance and payment bonds from LBE **Subcontractors**.

67.4 If the **Contractor** has indicated prior to award that no **Work** will be subcontracted, no **Work** shall be subcontracted without the prior approval of the **Commissioner**, which shall be granted only if the **Contractor** makes a good faith effort beginning at least six (6) weeks before the **Work** is to be performed to obtain LBE **Subcontractors** to perform the **Work**.

67.5 If the **Contractor** has not identified sufficient LBE **Subcontractors** prior to award, it shall sign a letter of compliance stating that it complies with Section 6-108.1 of the Administrative Code, recognizes that achieving the LBE requirement is a condition of its **Contract**, and shall submit documentation demonstrating its good faith efforts to obtain LBEs. After award, the **Contractor** shall begin to solicit LBE's to perform subcontracted **Work** at least six (6) weeks before the date such **Work** is to be performed and shall demonstrate that a good faith effort has been made to obtain LBEs on each subcontract until it meets the required percentage.

67.6 Failure of the **Contractor** to comply with the requirements of Section 6-108.1 of the Administrative Code and the regulations promulgated thereunder shall constitute a material breach of this **Contract**. Remedy for such breach may include the imposition of any or all of the following sanctions:

67.6.1 Reducing the **Contractor's** compensation by an amount equal to the dollar value of the percentage of the LBE subcontracting requirement not complied with;

67.6.2 Declaring the **Contractor** in default;

67.6.3 If the **Contractor** is an LBE, de-certifying and declaring the **Contractor** ineligible to participate in the LBE program for a period of up to three (3) years.

ARTICLE 68. ANTITRUST

68.1 The **Contractor** hereby assigns, sells, and transfers to the **City** all right, title, and interest in and to any claims and causes of action arising under the antitrust **Laws** of New York State or of the United States relating to the particular goods or services purchased or procured by the **City** under this **Contract**.

ARTICLE 69. MacBRIDE PRINCIPLES PROVISIONS

69.1 Notice To All Prospective **Contractors**:

69.1.1 Local Law No. 34 of 1991 became effective on September 10, 1991 and added Section 6-115.1 of the Administrative Code. The local **Law** provides for certain restrictions on **City Contracts** to express the opposition of the people of the **City** to employment discrimination practices in Northern Ireland to promote freedom of work-place opportunity.

69.1.2 Pursuant to Section 6-115.1, prospective **Contractors** for **Contracts** to provide goods or services involving an expenditure of an amount greater than ten thousand (\$10,000.) dollars, or for construction involving an amount greater than fifteen thousand (\$15,000.) dollars, are asked to sign a rider in which they covenant and represent, as a material condition of their **Contract**, that any business operations in Northern Ireland conducted by the **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** will be conducted in accordance with the MacBride Principles of nondiscrimination in employment.

69.1.3 Prospective **Contractors** are not required to agree to these conditions. However, in the case of **Contracts** let by competitive sealed bidding, whenever the lowest responsible bidder has not agreed to stipulate to the conditions set forth in this notice and another bidder who has agreed to stipulate to such conditions has submitted a bid within five (5%) percent of the lowest responsible bid for a **Contract** to supply goods, services or contraction of comparable quality, the **Agency** shall refer such bids to the Mayor, the Speaker or other officials, as appropriate, who may determine, in accordance with applicable **Law**, that it is in the best interest of the **City** that the **Contract** be awarded to other than the lowest responsible pursuant to Section 313(b)(2) of the **City** Charter.

69.1.4 In the case of **Contracts** let by other than competitive sealed bidding, if a prospective **Contractor** does not agree to these conditions, no **Agency**, elected official or the **City** Council shall award the **Contract** to that bidder unless the **Agency** seeking to use the goods, services or construction certifies in writing that the **Contract** is necessary for the **Agency** to perform its functions and there is no other responsible **Contractor** who will supply goods, services or construction of comparable quality at a comparable price.

69.2 In accordance with Section 6-115.1 of the Administrative Code, the **Contractor** stipulates that such **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** either:

69.2.1 Have no business operations in Northern Ireland, or

69.2.2 Shall take lawful steps in good faith to conduct any business operations they have in Northern Ireland in accordance with the MacBride Principles, and shall permit independent monitoring of their compliance with such principles.

69.3 For purposes of this Article, the following terms shall have the following meanings:

69.3.1 "MacBride Principles" shall mean those principles relating to nondiscrimination in employment and freedom of work-place opportunity which require employers doing business in Northern Ireland to:

- 69.3.1(a) increase the representation of individuals from under-represented religious groups in the workforce, including managerial, supervisory, administrative, clerical and technical jobs;
- 69.3.1(b) take steps to promote adequate security for the protection of employees from under-represented religious groups both at the work-place and while traveling to and from **Work**;
- 69.3.1(c) ban provocative religious or political emblems from the workplace;
- 69.3.1(d) publicly advertise all job openings and make special recruitment efforts to attract applicants from under-represented religious groups;
- 69.3.1(e) establish layoff, recall, and termination procedures which do not in practice favor a particular religious group;
- 69.3.1(f) abolish all job reservations, apprenticeship restrictions and different employment criteria which discriminate on the basis of religion;
- 69.3.1(g) develop training programs that will prepare substantial numbers of current employees from under-represented religious groups for skilled jobs, including the expansion of existing programs and the creation of new programs to train, upgrade, and improve the skills of workers from under-represented religious groups;
- 69.3.1(h) establish procedures to assess, identify, and actively recruit employees from under-represented religious groups with potential for further advancement; and
- 69.3.1(i) appoint a senior management staff member to oversee affirmative action efforts and develop a timetable to ensure their full implementation.

69.4 The **Contractor** agrees that the covenants and representations in Article 69.2 are material conditions to this **Contract**. In the event the **Agency** receives information that the **Contractor** who made the stipulation required by this Article 69 is in violation thereof, the **Agency** shall review such information and give the **Contractor** an opportunity to respond. If the **Agency** finds that a violation has occurred, the **Agency** shall have the right to declare the **Contractor** in default and/or terminate this **Contract** for cause and procure supplies, services or **Work** from another source in the manner the **Agency** deems proper. In the event of such termination, the **Contractor** shall pay to the **Agency**, or the **Agency** in its sole discretion may withhold from any amounts otherwise payable to the **Contractor**, the difference between the **Contract** price for the uncompleted portion of this **Contract** and the cost to the **Agency** of completing performance of this **Contract** either itself or by engaging another **Contractor** or **Contractors**. In the case of a requirement **Contract**, the **Contractor** shall be liable for such difference in price for the entire amount of supplies required by the **Agency** for the uncompleted term of **Contractor's Contract**. In the case of a construction **Contract**, the **Agency** shall also have the right to hold the **Contractor** in partial or total default in accordance with the default provisions of this **Contract**, and/or may seek debarment or suspension of the **Contractor**. The rights and remedies of the **Agency** hereunder shall be in addition to, and not in lieu of, any rights and remedies the **Agency** has pursuant to this **Contract** or by operation of **Law**.

ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB

70.1 The **Contractor** shall electronically file all alteration type-2 and alteration type-3 applications via the New York City Development Hub Web site, except applications for the following types of minor alterations: enlargements, curb cuts, legalizations, fire alarms, builders pavement plans, and jobs filed on Landmark Preservation Commission calendared properties. All such filings must be professionally certified. Information about electronic filing via the New York City Development Hub is available on the City Department of Buildings Web site at www.nyc.gov/buildings.

ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS

71.1 Tropical hardwoods, as defined in Section 165 of the New York State Finance Law (Finance Law), shall not be utilized in the performance of this **Contract** except as expressly permitted by Section 165 of the Finance Law.

ARTICLE 72. CONFLICTS OF INTEREST

72.1 Section 2604 of the **City** Charter and other related provisions of the **City** Charter, the Administrative Code, and the Penal Law are applicable under the terms of this **Contract** in relation to conflicts of interest and shall be extended to **Subcontractors** authorized to perform **Work**, labor and services pursuant to this **Contract** and further, it shall be the duty and responsibility of the **Contractor** to so inform its respective **Subcontractors**. Notice is hereby given that, under certain circumstances, penalties may be invoked against the donor as well as the recipient of any form of valuable gift.

ARTICLE 73. MERGER CLAUSE

73.1 The written **Contract** herein, contains all the terms and conditions agreed upon by the parties hereto, and no other agreement, oral or otherwise, regarding the subject matter of this **Contract** shall be deemed to exist or to bind any of the parties hereto, or to vary any of the terms contained herein.

ARTICLE 74. STATEMENT OF WORK

74.1 The **Contractor** shall furnish all labor and materials and perform all **Work** in strict accordance with the **Specifications** and **Addenda** thereto, numbered as shown in Schedule A.

ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR

75.1 The **City** will pay and the **Contractor** will accept in full consideration for the performance of the **Contract**, subject to additions and deductions as provided herein, the total sum shown in Schedule A, this said sum being the amount at which the **Contract** was awarded to the **Contractor** at a public letting thereof, based upon the **Contractor's** bid for the **Contract**.

ARTICLE 76. ELECTRONIC FUNDS TRANSFER

76.1 In accordance with Section 6-107.1 of the Administrative Code, the **Contractor** agrees to accept payments under this **Contract** from the **City** by electronic funds transfer (EFT). An EFT is any

transfer of funds, other than a transaction originated by check, draft or similar paper instrument, which is initiated through an electronic terminal, telephonic instrument or computer or magnetic tape so as to order, instruct or authorize a financial institution to debit or credit an account. Prior to the first payment made under this **Contract**, the **Contractor** shall designate one financial institution or other authorized payment agent and shall complete the attached "EFT Vendor Payment Enrollment Form" in order to provide the Commissioner of the **City** Department of Finance with information necessary for the **Contractor** to receive electronic funds transfer payments through a designated financial institution or authorized payment agent. The crediting of the amount of a payment to the appropriate account on the books of a financial institution or other authorized payment agent designated by the **Contractor** shall constitute full satisfaction by the **City** for the amount of the payment under this **Contract**. The account information supplied by the **Contractor** to facilitate the electronic funds transfer shall remain confidential to the fullest extent provided by **Law**.

76.2 The **Commissioner** may waive the application of the requirements of this Article 76 to payments on contracts entered into pursuant to Section 315 of the **City** Charter. In addition, the Commissioner of the Department of Finance and the Comptroller may jointly issue standards pursuant to which the **Agency** may waive the requirements of this Article 76 for payments in the following circumstances: (i) for individuals or classes of individuals for whom compliance imposes a hardship; (ii) for classifications or types of checks; or (iii) in other circumstances as may be necessary in the interest of the **City**.

ARTICLE 77. RECORDS RETENTION

77.1 The **Contractor** agrees to retain all books, records, and other documents relevant to this **Contract** for six years after the final payment or termination of this **Contract**, whichever is later. **City**, state, and federal auditors and any other persons duly authorized by the **City** shall have full access to and the right to examine any such books, records, and other documents during the retention period.

ARTICLE 78. EXAMINATION AND VIEWING OF SITE, CONSIDERATION OF OTHER SOURCES OF INFORMATION AND CHANGED SITE CONDITIONS

78.1 Pre-Bidding (Investigation) Viewing of Site – Bidders must carefully view and examine the **Site** of the proposed **Work**, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions and hazards on, about or above the **Site** relating to or affecting in any way the performance of the **Work** to be done under the **Contract** that were or should have been known by a reasonably prudent bidder. To arrange a date for visiting the **Site**, bidders are to contact the **Agency** contact person specified in the bid documents.

78.2 Should the **Contractor** encounter during the progress of the **Work** site conditions or environmental hazards at the **Site** materially differing from any shown on the **Contract Drawings** or indicated in the **Specifications** or such conditions or environmental hazards as could not reasonably have been anticipated by the **Contractor**, which conditions or hazards will materially affect the cost of the **Work** to be done under the **Contract**, the attention of the **Commissioner** must be called immediately to such conditions or hazards before they are disturbed. The **Commissioner** shall thereupon promptly investigate the conditions or hazards. If the **Commissioner** finds that they do so materially differ, and that they could not have been reasonably anticipated by the **Contractor**, the **Contract** may be modified with the **Commissioner's** written approval.

**ARTICLE 79. PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED
BUSINESS ENTERPRISES IN CITY PROCUREMENT**

NOTICE TO ALL PROSPECTIVE CONTRACTORS

ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

**PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD
AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS**

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, ("**Participation Goals**"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed nonresponsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multiyear contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.**

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the

firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an **M/WBE** Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's **M/WBE** Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its **M/WBE** Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an **M/WBE** Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its **M/WBE** Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at poped@ddc.nyc.gov or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the **Participation Goals** to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its **M/WBE Utilization Plan**. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the **Participation Goals**. In making such determination, Agency may consider whether the **M/WBE Utilization Plan** is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of **M/WBE Utilization Plan**. (a) A Contractor may request a modification of its **M/WBE Utilization Plan** after award of this Contract. **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission.** The Agency may grant a request for Modification of a Contractor's **M/WBE Utilization Plan** if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the **Participation Goals**. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the **M/WBE Utilization Plan**, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's **M/WBE liaison officer** and to **DSBS**;
- (viii) Description of how recommendations made by **DSBS** and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's **M/WBE officer** shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its **M/WBE Utilization Plan** would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an **M/WBE** Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of an **M/WBE** Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE** Utilization Plan.

2. Pursuant to DSBS rules, construction contracts that include a requirement for an **M/WBE** Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.

3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.

4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).

5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.

2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE** Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.

3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE** Utilization Plan, Agency may determine that one of the following actions should be taken:

- (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
- (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
- (c) making a finding that the Contractor is in default of the Contract;
- (d) terminating the Contract;
- (e) declaring the Contractor to be in breach of Contract;
- (f) withholding payment or reimbursement;
- (g) determining not to renew the Contract;
- (h) assessing actual and consequential damages;
- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

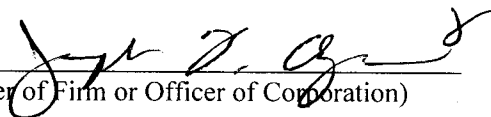
IN WITNESS WHEREOF, the Commissioner, on behalf of the City of New York, and the Contractor, have executed this agreement in quadruplicate, two parts of which are to remain with the Commissioner, another to be filed with the Comptroller of the City, and the fourth to be delivered to the Contractor.

THE CITY OF NEW YORK

By: 
Deputy Commissioner

OFFICE OF THE
DEPUTY COMMISSIONER
OF THE CITY OF NEW YORK
100 NASSAU ST., 10TH FLOOR
NEW YORK, N.Y. 10038
TEL: (212) 312-1234

CONTRACTOR:

By: 
(Member of Firm or Officer of Corporation)

Title: PRES

(Where Contractor is a Corporation, add):
Attest:

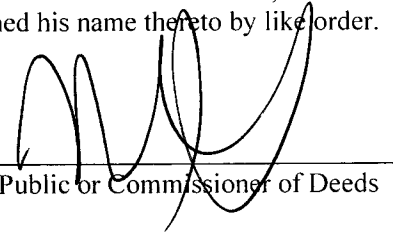
Secretary

(Seal)

ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Queens ss:

On this 9 day of MAY 2018 before me personally came JOSEPH AZARA to me known who, being by me duly sworn did depose and say that he resides at 215 HOWARD AVE S.E., N.Y that he is the PRESIDENT of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.



Notary Public or Commissioner of Deeds

MARIA JOHNSTON
Notary Public, State of New York
No. 01JO6351081
Qualified in Queens County
Commission Expires Nov. 28, 2020

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

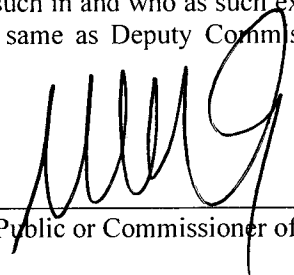
On this _____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

ACKNOWLEDGEMENT BY ^{Deputy} COMMISSIONER

State of New York County of Queens ss:

On this 9 day of May, 2018, before me personally came Thomas Foley to me known, and known to be the Deputy Commissioner of the Department of Design and Construction of The City of New York, the person described as such in and who as such executed the foregoing instrument and acknowledged to me that he executed the same as Deputy Commissioner for the purposes therein mentioned.



Notary Public or Commissioner of Deeds

VICTORIA AYO-VAUGHAN
Notary Public, State of New York
Registration #01AY5014042
Qualified in Queens County
Commission Expires July 15, 2019

AUTHORITY

MAYOR'S CERTIFICATE NO. CBX
BUDGET DIRECTOR'S CERTIFICATE NO.

DATED
DATED

APPROPRIATION
COMMISSIONER'S CERTIFICATE

In conformity with the provisions of Section 6-101 of the Administrative Code of the City of New York, it is hereby certified that the estimated cost of the work, materials and supplies required by the within Contract, amounting to

One million, seven hundred fifty-four
thousand, three hundred seventy-nine

Dollars (\$ 1,754,379.00)

is chargeable to the fund of the Department of Design and Construction entitled Code

LN XEA 08 BX

Department of Design and Construction

I hereby certify that the specifications contained herein comply with the terms and conditions of the BUDGET.



Deputy Commissioner

COMPTROLLER'S CERTIFICATE

The City of New York _____

Pursuant to the provisions of Section 6-101 of the Administrative Code of the City of New York, I hereby certify that there remains unapplied and unexpended a balance of the above mentioned fund applicable to this Contract sufficient to pay the estimated expense of executing the same viz:

\$ _____

Comptroller

MAYOR'S CERTIFICATE OR
CERTIFICATE OF THE DIRECTOR
OF THE BUDGET

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 1)

PERFORMANCE BOND #1

KNOW ALL PERSONS BY THESE PRESENTS,;

That we, _____

hereinafter referred to as the "Principal,"
and, _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns in the penal sum of _____

(\$ _____) Dollars, lawful money of the United States for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for _____

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 1)

Bond No. 015202387

PERFORMANCE BOND #1

KNOW ALL PERSONS BY THESE PRESENTS:

That we, C.D.E. Air Conditioning Co., Inc.

321 39th Street, Brooklyn, NY 11232

hereinafter referred to as the "Principal,"

and, Liberty Mutual Insurance Company

175 Berkeley Street, Boston, MA 02116

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns in the penal sum of _____

One Million Seven Hundred Fifty Four Thousand Three Hundred Seventy Nine and 00/100-----

(\$ 1,754,379.00) Dollars, lawful money of the United States for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

FMS ID: LNXEA08BX, E-PIN: 85017B0124001, DDC PIN: 8502017LN0027C, Two (2) Bronx Branch

Libraries - Replacement of HVAC and BMS

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 2)

good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to (1) pay the City the cost to complete the contract as determined by the City in excess of the balance of the Contract held by the City, plus any damages or costs to which the City is entitled, up to the full amount of the above penal sum, (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof, or (3) tender a completion Contractor that is acceptable to the City. The Surety (Sureties) further agrees, at its option, either to notify the City that it elects to pay the city the cost of completion plus any applicable damages and costs under option (1) above, or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and, if the Surety elects to fully perform and complete the Work, then to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. If the Surety elects to tender payment pursuant to (1) above, then the Surety shall tender such amount within fifteen (15) business days notification from the City of the cost of completion. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and complete all Work as provided herein, or to tender a completion contractor.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, and waivers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to subcontractors shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal. Notwithstanding the above, if the City makes payments to the Principal before the time required by the contract that in the aggregate exceed \$100,000 or 10% of the Contract price, whichever is less, and that have not become earned prior to the Principal being found to be in default, then all payments made to the Principal before the time required by the Contract shall be added to the remaining contract value available to be paid for the completion of the Contract as if such sums had not been paid to the Principal, but shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and to complete all Work as provided herein, or to tender a completion contractor.

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 3)

IN WITNESS WHEREOF, The Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this

_____ 7th _____ day of _____ May _____, 20 18 _____
(Seal)

_____ C.D.E. Air Conditioning Co., Inc. _____ (L.S.)
Principal

(Seal) By: _____
Joseph F. Azara, Jr. - President
Surety
Liberty Mutual Insurance Company

(Seal) By: _____
Theresa J Foley, Attorney-In-Fact
Surety

(Seal) By: _____
Surety

(Seal) By: _____
Surety

(Seal) By: _____
Surety

(Seal) By: _____
Surety

Bond Premium Rate \$8.34 per M/Scale _____
Bond Premium Cost \$11,496.00 _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL IF A CORPORATION

State of New York County of Kings ss:

On this 7th day of May, 2018 before me personally came Joseph F. Azara, Jr.,

to me known, who, being by me duly sworn did depose and say that he/she resides at 215 Howard Avenue

Staten Island, New York 10301; that he/she is the President of the corporation described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

Robert J. Ayoub
Notary Public or Commissioner of Deeds.

ROBERT J. AYOOB
NOTARY PUBLIC, STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

ACKNOWLEDGMENT OF PRINCIPAL IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____,

to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ ; that he/she is _____ partner of _____, a limited/general partnership existing under the laws of the State of _____, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

Notary Public or Commissioner of Deeds.

ACKNOWLEDGMENT OF PRINCIPAL IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____,

to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

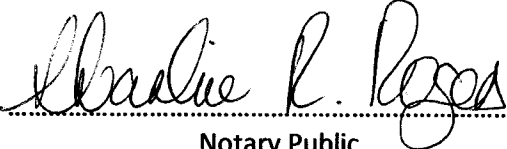
Affix Acknowledgments and Justification of Sureties.

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF NEW YORK

COUNTY OF NASSAU

On this 7th day of **May, 2018**, before me personally came **Theresa J Foley** to me known, who, being by me duly sworn, did depose and say; that she is the Attorney-in-Fact of **Liberty Mutual Insurance Company**, the corporation described in which executed the above instrument; that she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by the Board of Directors of said corporation; and that she signed her name thereto by the authority of the Power of Attorney of said Company, of which a Certified Copy is hereto attached, and that she signed said Instrument as an Attorney-in-Fact of said company by like authority.


.....
Notary Public

SHARLINE R. ROGERS
NOTARY PUBLIC, State of New York
No. 01RO6204400
Qualified in Queens County
Commission Expires April 20, 2021

THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Certificate No. 7702110

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company West American Insurance Company

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Frankie Grella; Kevin T. Walsh; Michael Marino; Theresa J. Foley

all of the city of Jericho, state of NY each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 29th day of March, 2017.



The Ohio Casualty Insurance Company
Liberty Mutual Insurance Company
West American Insurance Company

By: David M. Carey
David M. Carey, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

STATE OF PENNSYLVANIA ss
COUNTY OF MONTGOMERY

On this 29th day of March, 2017, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.



COMMONWEALTH OF PENNSYLVANIA
Notarial Seal
Teresa Pastella, Notary Public
Upper Merion Twp., Montgomery County
My Commission Expires March 28, 2021
Member, Pennsylvania Association of Notaries

By: Teresa Pastella
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV – OFFICERS – Section 12. Power of Attorney. Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII – Execution of Contracts – SECTION 5. Surety Bonds and Undertakings. Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation – The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization – By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this MAY 07 2018 day of _____, 2018.



By: Renee C. Llewellyn
Renee C. Llewellyn, Assistant Secretary

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.



LIBERTY MUTUAL INSURANCE COMPANY
FINANCIAL STATEMENT — DECEMBER 31, 2017

Assets	Liabilities
Cash and Bank Deposits..... \$370,003,299	Unearned Premiums..... \$7,503,154,587
*Bonds — U.S Government..... 1,331,664,975	Reserve for Claims and Claims Expense..... 19,658,731,454
*Other Bonds..... 11,127,053,004	Funds Held Under Reinsurance Treaties..... 224,693,828
*Stocks..... 16,367,850,688	Reserve for Dividends to Policyholders..... 967,520
Real Estate..... 272,895,626	Additional Statutory Reserve..... 52,491,027
Agents' Balances or Uncollected Premiums..... 5,258,657,823	Reserve for Commissions, Taxes and
Accrued Interest and Rents..... 100,341,596	Other Liabilities..... 4,049,392,852
Other Admitted Assets..... <u>11,192,287,530</u>	Total..... \$31,489,431,268
Total Admitted Assets..... <u>\$46,020,754,541</u>	Special Surplus Funds..... \$176,230,822
	Capital Stock..... 10,000,000
	Paid in Surplus..... 9,484,316,385
	Unassigned Surplus..... 4,860,776,066
	Surplus to Policyholders..... 14,531,323,273
	Total Liabilities and Surplus..... <u>\$46,020,754,541</u>



* Bonds are stated at amortized or investment value; Stocks at Association Market Values.
The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2017, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 16th day of March, 2018.

T. Mikolajewski

Assistant Secretary

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 1)

Bond No. 015202387

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

C.D.E. Air Conditioning Co., Inc.

321 39th Street

Brooklyn, New York 11232

hereinafter referred to as the "Principal", and _____

Liberty Mutual Insurance Company

175 Berkeley Street

Boston, MA 02116

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

One Million Seven Hundred Fifty Four Thousand Three Hundred Seventy Nine and 00/100-----

(\$ 1,754,379.00) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

FMS ID: LNXEA08BX, E-PIN: 85017B0124001, DDC PIN: 8502017LN0027C, Two (2) Bronx Branch

Libraries - Replacement of HVAC and BMS

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so engaged who perform the work of laborers or mechanics at or in the vicinity of the site

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 2)

of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

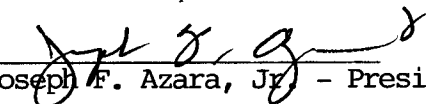
Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this 7th day of May, 2018.

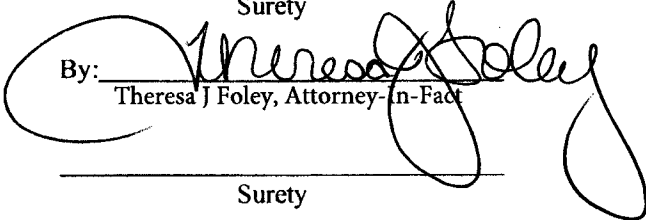
(Seal)

C.D.E. Air Conditioning Co., Inc. (L.S.)
Principal

By: 
Joseph F. Azara, Jr. - President

(Seal)

Liberty Mutual Insurance Company
Surety

By: 
Theresa J Foley, Attorney-in-Fact

(Seal)

Surety

By: _____

(Seal)

Surety

By: _____

(Seal)

Surety

By: _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Kings ss:

On this 7th day of May, 2018, before me personally came Joseph F. Azara, Jr. to me known, who, being by me duly sworn did depose and say that he resides at 215 Howard Avenue, Staten Island, New York 10301 that he is the President of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

Robert J. Ayoub
Notary Public or Commissioner of Deeds

ROBERT J. AYOUB
NOTARY PUBLIC STATE OF NEW YORK
NO. 01AY4893555
QUALIFIED IN KINGS COUNTY
MY COMMISSION EXPIRES MAY 11, 2019

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

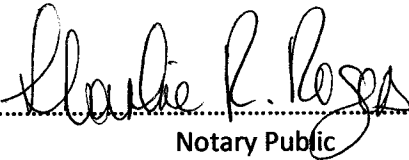
Affix Acknowledgments and Justification of Sureties.

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF NEW YORK

COUNTY OF NASSAU

On this 7th day of **May, 2018**, before me personally came **Theresa J Foley** to me known, who, being by me duly sworn, did depose and say; that she is the Attorney-in-Fact of **Liberty Mutual Insurance Company**, the corporation described in which executed the above instrument; that she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that it was so affixed by the Board of Directors of said corporation; and that she signed her name thereto by the authority of the Power of Attorney of said Company, of which a Certified Copy is hereto attached, and that she signed said Instrument as an Attorney-in-Fact of said company by like authority.


.....
Notary Public

SHARLINE R. ROGERS
NOTARY PUBLIC, State of New York
No. 01RO6204400
Qualified in Queens County
Commission Expires April 20, 2021

THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Certificate No. 7702111

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company West American Insurance Company

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, **Frankie Grella; Kevin T. Walsh; Michael Marino; Theresa J. Foley**

all of the city of Jericho, state of NY each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 29th day of March, 2017.



The Ohio Casualty Insurance Company
Liberty Mutual Insurance Company
West American Insurance Company

By: David M. Carey
David M. Carey, Assistant Secretary

STATE OF PENNSYLVANIA ss
COUNTY OF MONTGOMERY

On this 29th day of March, 2017, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.



COMMONWEALTH OF PENNSYLVANIA
Notarial Seal
Teresa Pastella, Notary Public
Upper Merion Twp., Montgomery County
My Commission Expires March 28, 2021
Member, Pennsylvania Association of Notaries

By: Teresa Pastella
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV – OFFICERS – Section 12. Power of Attorney. Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII – Execution of Contracts – SECTION 5. Surety Bonds and Undertakings. Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation – The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization – By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

MAY 07 2018

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this _____ day of _____, 20_____.



By: Renee C. Llewellyn
Renee C. Llewellyn, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.



LIBERTY MUTUAL INSURANCE COMPANY
FINANCIAL STATEMENT — DECEMBER 31, 2017

Assets	Liabilities
Cash and Bank Deposits..... \$370,003,299	Unearned Premiums..... \$7,503,154,587
*Bonds — U.S Government..... 1,331,664,975	Reserve for Claims and Claims Expense..... 19,658,731,454
*Other Bonds..... 11,127,053,004	Funds Held Under Reinsurance Treaties..... 224,693,828
*Stocks..... 16,367,850,688	Reserve for Dividends to Policyholders..... 967,520
Real Estate..... 272,895,626	Additional Statutory Reserve..... 52,491,027
Agents' Balances or Uncollected Premiums..... 5,258,657,823	Reserve for Commissions, Taxes and
Accrued Interest and Rents..... 100,341,596	Other Liabilities..... <u>4,049,392,852</u>
Other Admitted Assets..... <u>11,192,287,530</u>	Total..... \$31,489,431,268
Total Admitted Assets..... <u>\$46,020,754,541</u>	Special Surplus Funds..... \$176,230,822
	Capital Stock..... 10,000,000
	Paid in Surplus..... 9,484,316,385
	Unassigned Surplus..... 4,860,776,066
	Surplus to Policyholders..... <u>14,531,323,273</u>
	Total Liabilities and Surplus..... <u>\$46,020,754,541</u>



* Bonds are stated at amortized or investment value; Stocks at Association Market Values.
 The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2017, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 16th day of March, 2018.

T. Mikolajewski

 Assistant Secretary

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer any rights to the certificate holder in lieu of such endorsement(s).

PRODUCER USI Insurance Services, LLC 333 Westchester Ave, Suite 102 White Plains, NY 10604 914 459-6200	CONTACT NAME: PHONE (A/C, No, Ext): 914 459-6200 FAX (A/C, No): 610 537-4220 E-MAIL ADDRESS:													
	<table border="1"> <tr> <th>INSURER(S) AFFORDING COVERAGE</th> <th>NAIC #</th> </tr> <tr> <td>INSURER A : Harleysville Insurance Company</td> <td>23582</td> </tr> <tr> <td>INSURER B : Harleysville Worcester Ins Co</td> <td>26182</td> </tr> <tr> <td>INSURER C : Philadelphia Indemnity Insurance Co.</td> <td>18058</td> </tr> <tr> <td>INSURER D :</td> <td></td> </tr> <tr> <td>INSURER E :</td> <td></td> </tr> <tr> <td>INSURER F :</td> <td></td> </tr> </table>	INSURER(S) AFFORDING COVERAGE	NAIC #	INSURER A : Harleysville Insurance Company	23582	INSURER B : Harleysville Worcester Ins Co	26182	INSURER C : Philadelphia Indemnity Insurance Co.	18058	INSURER D :		INSURER E :		INSURER F :
INSURER(S) AFFORDING COVERAGE	NAIC #													
INSURER A : Harleysville Insurance Company	23582													
INSURER B : Harleysville Worcester Ins Co	26182													
INSURER C : Philadelphia Indemnity Insurance Co.	18058													
INSURER D :														
INSURER E :														
INSURER F :														
INSURED C.D.E. Air Conditioning Co., Inc. 321 39th St. Brooklyn, NY 11232														

COVERAGES **CERTIFICATE NUMBER:** **REVISION NUMBER:**


THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY			MPA00000014937S	12/01/2017	12/01/2018	EACH OCCURRENCE \$2,000,000
	<input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR						DAMAGE TO RENTED PREMISES (Ea occurrence) \$300,000
	<input checked="" type="checkbox"/> Contractual Liab						MED EXP (Any one person) \$5,000
GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input checked="" type="checkbox"/> LOC OTHER:							
B	AUTOMOBILE LIABILITY			BA00000014936S	12/01/2017	12/01/2018	COMBINED SINGLE LIMIT (Ea accident) \$1,000,000
	<input checked="" type="checkbox"/> ANY AUTO OWNED AUTOS ONLY		<input type="checkbox"/> SCHEDULED AUTOS				BODILY INJURY (Per person) \$
	<input checked="" type="checkbox"/> HIRED AUTOS ONLY		<input checked="" type="checkbox"/> NON-OWNED AUTOS ONLY				BODILY INJURY (Per accident) \$
	<input checked="" type="checkbox"/> Drive Oth Car						PROPERTY DAMAGE (Per accident) \$
B	<input checked="" type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> OCCUR			CMB00000016422S	12/01/2017	12/01/2018	EACH OCCURRENCE \$5,000,000
	<input type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE						AGGREGATE \$5,000,000
WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? <input type="checkbox"/> Y <input type="checkbox"/> N <input type="checkbox"/> N/A (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below							
C	Excess Liabi			PHUB518720	12/01/2017	12/01/2018	\$5,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

RE: Two Bronx Branch Libraries, Replacement of HVAC & BMS, FMS ID: #LNXEAO8BX.
 The General Liability policy includes an automatic Additional Insured endorsement that provides Additional Insured status to the Certificate Holder, including its officials and employees and all Persons or Organization, only when there is a written contract that requires such status, and only with regard to work performed on behalf of the named insured.

CERTIFICATE HOLDER **CANCELLATION**

NYC Dept. of Design and Construction 30-30 Thomson Ave. LLC Long Island City, NY 11101	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.
	AUTHORIZED REPRESENTATIVE 

CERTIFICATION BY BROKER

The undersigned insurance broker represents to the New York City Department of Design and Construction that the attached Certificate of Insurance is accurate in all material respects, and that the described insurance is effective as of the date of the Certification.

USI Insurance Services LLC

[Name of broker (typewritten)]

333 Westchester Avenue, White Plains, NY 10604

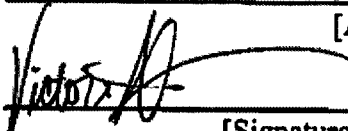
[Address of broker (typewritten)]

VictoriaL.Murphy@usi.com

[Email address of broker (typewritten)]

PH: 914-459-6296 / Fax: 610-537-2334

[Address of broker (typewritten)]



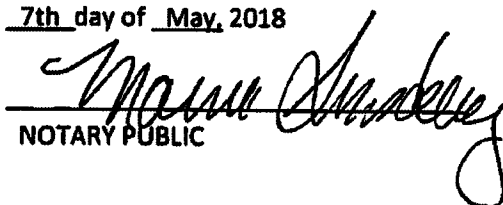
[Signature of authorized officer of broker]

Victoria Murphy – Account Manager

[Name and title of authorized officer (typewritten)]

Sworn to before me this

7th day of May, 2018


NOTARY PUBLIC

MARNIE GINSBURG
Notary Public, State of New York
No. 01G15196136
Qualified in Westchester County
Commission Expires 11/03/2020



CERTIFICATE OF WORKERS' COMPENSATION INSURANCE

***** 112217107

C. D. E. AIR-CONDITIONING CO.,INC.
321 39TH STREET
BROOKLYN NY 11232



SCAN TO VALIDATE
AND SUBSCRIBE

POLICYHOLDER
C. D. E. AIR-CONDITIONING CO.,INC.
321 39TH STREET
BROOKLYN NY 11232

CERTIFICATE HOLDER
NYC DEPARTMENT OF DESIGN
AND CONSTRUCTION
30-30 THOMSON AVENUE
LONG ISLAND CITY NY 11101

POLICY NUMBER G 1101 202-8	CERTIFICATE NUMBER 594091	POLICY PERIOD 05/01/2018 TO 05/01/2019	DATE 04/12/2018
-------------------------------	------------------------------	---	--------------------

THIS IS TO CERTIFY THAT THE POLICYHOLDER NAMED ABOVE IS INSURED WITH THE NEW YORK STATE INSURANCE FUND UNDER POLICY NO. 1101 202-8, COVERING THE ENTIRE OBLIGATION OF THIS POLICYHOLDER FOR WORKERS' COMPENSATION UNDER THE NEW YORK WORKERS' COMPENSATION LAW WITH RESPECT TO ALL OPERATIONS IN THE STATE OF NEW YORK, EXCEPT AS INDICATED BELOW.

IF YOU WISH TO RECEIVE NOTIFICATIONS REGARDING SAID POLICY, INCLUDING ANY NOTIFICATION OF CANCELLATIONS, OR TO VALIDATE THIS CERTIFICATE, VISIT OUR WEBSITE AT [HTTPS://WWW.NYSIF.COM/CERT/CERTVAL.ASP](https://www.nysif.com/cert/certval.asp). THE NEW YORK STATE INSURANCE FUND IS NOT LIABLE IN THE EVENT OF FAILURE TO GIVE SUCH NOTIFICATIONS.

THIS CERTIFICATE DOES NOT APPLY TO THOSE JOB SITES WHICH ARE COVERED BY OTHER INSURANCE AND ARE SPECIFICALLY EXCLUDED BY ENDORSEMENT.


THE POLICY INCLUDES A WAIVER OF SUBROGATION ENDORSEMENT UNDER WHICH NYSIF AGREES TO WAIVE ITS RIGHT OF SUBROGATION TO BRING AN ACTION AGAINST THE CERTIFICATE HOLDER TO RECOVER AMOUNTS WE PAID IN WORKERS' COMPENSATION AND/OR MEDICAL BENEFITS TO OR ON BEHALF OF AN EMPLOYEE OF OUR INSURED IN THE EVENT THAT, PRIOR TO THE DATE OF THE ACCIDENT, THE CERTIFICATE HOLDER HAS ENTERED INTO A WRITTEN CONTRACT WITH OUR INSURED THAT REQUIRES THAT SUCH RIGHT OF SUBROGATION BE WAIVED.

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS NOR INSURANCE COVERAGE UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICY.

NEW YORK STATE INSURANCE FUND

DIRECTOR, INSURANCE FUND UNDERWRITING

VALIDATION NUMBER: 392370696





CERTIFICATE OF INSURANCE COVERAGE
DISABILITY AND PAID FAMILY LEAVE BENEFITS LAW

PART 1. To be completed by Disability and Paid Family Leave Benefits Carrier or Licensed Insurance Agent of that Carrier

<p>1a. Legal Name & Address of Insured (use street address only)</p> <p>CDE AIR CONDITIONING CO., INC. 321 323 39TH ST BROOKLYN, NY 11232</p> <p><i>Work Location of Insured (Only required if coverage is specifically limited to certain locations in New York State, i.e., Wrap-Up Policy)</i></p>	<p>1b. Business Telephone Number of Insured</p> <p>718-788-1040</p> <p>1c. Federal Employer Identification Number of Insured or Social Security Number</p> <p>112217107</p>
<p>2. Name and Address of Entity Requesting Proof of Coverage (Entity Being Listed as the Certificate Holder)</p> <p>NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101</p>	<p>3a Name of Insurance Carrier</p> <p>HARTFORD LIFE AND ACCIDENT</p> <p>3b Policy Number of Entity Listed in Box "1a"</p> <p>0DB099080</p> <p>3c Policy effective period</p> <p>10-01-2017 to 09-30-2018</p>

4. Policy provides the following benefits:

A. Both disability and paid family leave benefits.
 B. Disability benefits only.
 C. Paid family leave benefits only.

5. Policy covers:

A. All of the employer's employees eligible under the NYS Disability and Paid Family Leave Benefits Law.
 B. Only the following class or classes of employer's employees:

Under penalty of perjury, I certify that I am an authorized representative or licensed agent of the insurance carrier referenced above and that the named insured has NYS Disability and/or Paid Family Leave Benefits insurance coverage as described above.

Date Signed 05-04-2018 *Elizabeth Tello*
(Signature of insurance carrier's authorized representative or NYS Licensed Insurance Agent of that insurance carrier)

Telephone Number (212) 553-8074 Name and Title: Elizabeth Tello – Assistant Director, Statutory Services

IMPORTANT: If Boxes 4A and 5A are checked, and this form is signed by the insurance carrier's authorized representative or NYS Licensed Insurance Agent of that carrier, this certificate is **COMPLETE**. Mail it directly to the certificate holder.

If Box 4B, 4C or 5B is checked, this certificate is **NOT COMPLETE** for purposes of Section 220, Subd. 8 of the NYS Disability and Paid Family Leave Benefits Law. It must be mailed for completion to the Workers' Compensation Board, Plans Acceptance Unit, PO Box 5200, Binghamton, NY 13902-5200.

PART 2. To be completed by the NYS Workers' Compensation Board (Only if Box 4C or 5B of Part 1 has been checked)

State of New York
Workers' Compensation Board

According to information maintained by the NYS Workers' Compensation Board, the above-named employer has complied with the NYS Disability and Paid Family Leave Benefits Law with respect to all of his/her employees.

Date Signed _____ By _____
(Signature of Authorized NYS Workers' Compensation Board Employee)

Telephone Number _____ Name and Title _____

Please Note: Only insurance carriers licensed to write NYS disability and paid family leave benefits insurance policies and NYS licensed insurance agents of those insurance carriers are authorized to issue Form DB-120.1. Insurance brokers are NOT authorized to issue this form.



Additional Instructions for Form DB-120.1

By signing this form, the insurance carrier identified in Box 3 on this form is certifying that it is insuring the business referenced in box "1 a" for disability and/or paid family leave benefits under the New York State Disability and Paid Family Leave Benefits Law. The Insurance Carrier or its licensed agent will send this Certificate of Insurance to the entity listed as the certificate holder in Box 2.

The insurance carrier must notify the above certificate holder and the Workers' Compensation Board within 10 days IF a policy is cancelled due to nonpayment of premiums or within 30 days IF there are reasons other than nonpayment of premiums that cancel the policy or eliminate the insured from coverage indicated on this Certificate. (These notices may be sent by regular mail.) Otherwise, this Certificate is valid for one year after this form is approved by the insurance carrier or its licensed agent, or until the policy expiration date listed in Box 3c, whichever is earlier.

This certificate is issued as a matter of information only and confers no rights upon the certificate holder. This certificate does not amend, extend or alter the coverage afforded by the policy listed, nor does it confer any rights or responsibilities beyond those contained in the referenced policy.

This certificate may be used as evidence of a Disability and/or Paid Family Leave Benefits contract of insurance only while the underlying policy is in effect.

Please Note: Upon the cancellation of the disability and/or paid family leave benefits policy indicated on this form, if the business continues to be named on a permit, license or contract issued by a certificate holder, the business must provide that certificate holder with a new Certificate of NYS Disability and/or Paid Family Leave Benefits Coverage or other authorized proof that the business is complying with the mandatory coverage requirements of the New York State Disability and Paid Family Leave Benefits Law.

DISABILITY AND PAID FAMILY LEAVE BENEFITS LAW

§220. Subd. 8

(a) The head of a state or municipal department, board, commission or office authorized or required by law to issue any permit for or in connection with any work involving the employment of employees in employment as defined in this article, and notwithstanding any general or special statute requiring or authorizing the issue of such permits, shall not issue such permit unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that the payment of disability benefits and after January first, two thousand and twenty-one, the payment of family leave benefits for all employees has been secured as provided by this article. Nothing herein, however, shall be construed as creating any liability on the part of such state or municipal department, board, commission or office to pay any disability benefits to any such employee if so employed.

(b) The head of a state or municipal department, board, commission or office authorized or required by law to enter into any contract for or in connection with any work involving the employment of employees in employment as defined in this article and notwithstanding any general or special statute requiring or authorizing any such contract, shall not enter into any such contract unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that the payment of disability benefits and after January first, two thousand eighteen, the payment of family leave benefits for all employees has been secured as provided by this article.

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 2)

good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to (1) pay the City the cost to complete the contract as determined by the City in excess of the balance of the Contract held by the City, plus any damages or costs to which the City is entitled, up to the full amount of the above penal sum, (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof, or (3) tender a completion Contractor that is acceptable to the City. The Surety (Sureties) further agrees, at its option, either to notify the City that it elects to pay the city the cost of completion plus any applicable damages and costs under option (1) above, or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and, if the Surety elects to fully perform and complete the Work, then to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. If the Surety elects to tender payment pursuant to (1) above, then the Surety shall tender such amount within fifteen (15) business days notification from the City of the cost of completion. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and complete all Work as provided herein, or to tender a completion contractor.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, and waivers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to subcontractors shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal. Notwithstanding the above, if the City makes payments to the Principal before the time required by the contract that in the aggregate exceed \$100,000 or 10% of the Contract price, whichever is less, and that have not become earned prior to the Principal being found to be in default, then all payments made to the Principal before the time required by the Contract shall be added to the remaining contract value available to be paid for the completion of the Contract as if such sums had not been paid to the Principal, but shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and to complete all Work as provided herein, or to tender a completion contractor.

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 3)

IN WITNESS WHEREOF, The Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this

_____ day of _____, 20_____
(Seal)

Principal (L.S.)

By: _____
(Seal) Surety

By: _____
(Seal) Surety

By: _____
(Seal) Surety

By: _____
(Seal) Surety

By: _____
(Seal) Surety

By: _____

Bond Premium Rate _____

Bond Premium Cost _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Performance Bond #1 (Pages 100 to 103): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.m.

PERFORMANCE BOND #1 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ ; that he/she is the _____ of the corporation described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

Notary Public or Commissioner of Deeds.

ACKNOWLEDGMENT OF PRINCIPAL IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ ; that he/she is _____ partner of _____, a limited/general partnership existing under the laws of the State of _____, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

Notary Public or Commissioner of Deeds.

ACKNOWLEDGMENT OF PRINCIPAL IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ , and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

Affix Acknowledgments and Justification of Sureties.

Performance Bond #2 (Pages 104 to 107): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 1)

PERFORMANCE BOND #2

KNOW ALL PERSONS BY THESE PRESENTS:,

That we, _____

hereinafter referred to as the "Principal,"

and, _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns in the penal sum of _____

(\$ _____) Dollars, lawful money of the United States for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making

Performance Bond #2 (Pages 104 to 107): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 2)

good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to either (1) pay the full amount of the above penal sum in complete discharge and exoneration of this bond and of all the liabilities of the Surety relating to this bond, or (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof. The Surety (Sureties) further agrees, at its option, either to tender the penal sum or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to commence and to complete all Work as provided herein.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any Work to be performed or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal.

Performance Bond #2 (Pages 104 to 107): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 3)

IN WITNESS WHEREOF, The Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this

_____ day of _____ 20 _____ .

(Seal)

_____(L.S.)

Principal

By: _____ .

(Seal)

Surety

By: _____ .

(Seal)

Surety

By: _____ .

(Seal)

Surety

By: _____ .

(Seal)

Surety

By: _____ .

(Seal)

Surety

By: _____ .

Bond Premium Rate _____ .

Bond Premium Cost _____ .

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Performance Bond #2 (Pages 104 to 107): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he resides at _____

_____ ; that he/she is the _____ of the corporation described in and which executed the foregoing instrument; that he/she signed his/her name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

Notary Public or Commissioner of Deeds.

ACKNOWLEDGMENT OF PRINCIPAL IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ ; that he/she is _____ partner of _____, a limited/general partnership existing under the laws of the State of _____, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____, to me known, who, being by me duly sworn did depose and say that he/she resides at _____

_____ , and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

Affix Acknowledgments and Justification of Sureties.

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 1)

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

hereinafter referred to as the "Principal", and _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

(\$ _____) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so engaged who perform the work of laborers or mechanics at or in the vicinity of the site

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 2)

of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this _____ day of _____, _____.

(Seal) _____ (L.S.)
Principal

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Payment Bond (Pages 108 to 111): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of _____ County of _____ ss:

On this ____ day of _____, _____, before me personally came _____ to me known, who, being by me duly sworn did depose and say that he resides at _____ that he is the _____ of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this ____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this ____ day of _____, _____, before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

Affix Acknowledgments and Justification of Sureties.

(NO TEXT ON THIS PAGE)

OFFICE OF THE COMPTROLLER

CITY OF NEW YORK

220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

APPENDIX

Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant and registered with the New York State Department of Labor, may be employed on a public work project.

Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the journey person wage rate for the classification of work he actually performed.

Apprentice ratios are established to ensure the proper safety, training and supervision of apprentices. A ratio establishes the number of journey workers required for each apprentice in a program and on a job site. Ratios are interpreted as follows: in the case of a 1:1, 1:4 ratio, there must be one journey worker for the first apprentice, and four additional journey workers for each subsequent apprentice.

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER	3
BOILERMAKER.....	3
BRICKLAYER.....	4
CARPENTER	5
CARPENTER - HIGH RISE CONCRETE FORMS	6
CEMENT MASON.....	7
CEMENT AND CONCRETE WORKER.....	7
DERRICKPERSON & RIGGER (STONE).....	8
DOCKBUILDER/PILE DRIVER.....	9
ELECTRICIAN	10
ELEVATOR CONSTRUCTOR	12
ELEVATOR REPAIR & MAINTENANCE	13
ENGINEER	14
ENGINEER - OPERATING	15
FLOOR COVERER	16
GLAZIER	16
HEAT & FROST INSULATOR	17
HOUSE WRECKER	18
IRON WORKER - ORNAMENTAL.....	18
IRON WORKER - STRUCTURAL.....	19
LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE LAYER & COMMON).....	20
MARBLE MECHANICS	21
MASON TENDER	22
METALLIC LATHER.....	23
MILLWRIGHT	23
PAVER AND ROADBUILDER.....	24
PAINTER	24
PAINTER - METAL POLISHER.....	25
PAINTER - STRUCTURAL STEEL.....	26
PLASTERER	26
PLASTERER - TENDER.....	27
PLUMBER	28
POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER	29
ROOFER.....	30
SHEET METAL WORKER.....	30
SIGN ERECTOR.....	32
STEAMFITTER	33
STONE MASON - SETTER.....	34
TAPER.....	35
TILE LAYER - SETTER	35
TIMBERPERSON	36

ASBESTOS HANDLER

(Ratio of Apprentice Journeyperson: 1 to 1, 1 to 3)

Asbestos Handler (First 1000 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 78% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$14.25

Asbestos Handler (Second 1000 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$14.25

Asbestos Handler (Third 1000 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 83% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$14.25

Asbestos Handler (Fourth 1000 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 89% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$14.25

(Local #78)

BOILERMAKER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Boilermaker (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$30.84
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$31.26

Boilermaker (Second Year: 1st Six Months)

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$32.57
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$33.02

Boilermaker (Second Year: 2nd Six Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$34.29
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$34.78

Boilermaker (Third Year: 1st Six Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$36.03
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$36.56

Boilermaker (Third Year: 2nd Six Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 85% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$37.76
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$38.32

Boilermaker (Fourth Year: 1st Six Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$39.51
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$40.09

Boilermaker (Fourth Year: 2nd Six Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 95% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$41.22
Effective 1/1/2018 - Supplemental Benefit Rate Per Hour: \$41.84

(Local #5)

BRICKLAYER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Bricklayer (First 750 Hours)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

Bricklayer (Second 750 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

Bricklayer (Third 750 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

Bricklayer (Fourth 750 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

Bricklayer (Fifth 750 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

Bricklayer (Sixth 750 Hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 95% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$18.80

(Bricklayer District Council)

CARPENTER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Carpenter (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 40% of Journeyperson's rate
Supplemental Benefit Rate Per Hour For Building Apprentice: \$31.34

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$33.03

Carpenter (Second Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 50% of Journeyman's rate

Supplemental Benefit Rate Per Hour For Building Apprentice: \$31.34

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$33.03

Carpenter (Third Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 65% of Journeyman's rate

Supplemental Benefit Rate Per Hour For Building Apprentice: \$31.34

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$33.03

Carpenter (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 80% of Journeyman's rate

Supplemental Benefit Rate Per Hour For Building Apprentice: \$31.34

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$33.03

(Carpenters District Council)

CARPENTER - HIGH RISE CONCRETE FORMS
(Ratio of Apprentice to Journeyman: 1 to 1, 2 to 5)

Carpenter - High Rise (First Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$16.86

Supplemental Benefit Rate per Hour: \$16.20

Carpenter - High Rise (Second Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$23.16

Supplemental Benefit Rate per Hour: \$16.33

Carpenter - High Rise (Third Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$29.61

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$16.46

Carpenter - High Rise (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$37.07

Supplemental Benefit Rate per Hour: \$16.61

(Carpenters District Council)

CEMENT MASON

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Cement Mason (First Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyman's Rate

Cement Mason (Second Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 60% of Journeyman's Rate

Cement Mason (Third Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 70% of Journeyman's Rate

(Local #780)

CEMENT AND CONCRETE WORKER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Cement & Concrete Worker (First 1333 hours)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 50% of Journeyman's rate

Supplemental Benefit Rate Per Hour: \$17.75

Cement & Concrete Worker (Second 1333 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$23.03

Cement & Concrete Worker (Last 1334 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$24.30

Cement & Concrete Worker (Hired after 2/6/2016 - First 1334 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: \$16.96
Supplemental Benefit Rate Per Hour: \$11.80

Cement & Concrete Worker (Hired after 2/6/2016 - Second 1334 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: \$22.08
Supplemental Benefit Rate Per Hour: \$16.49

Cement & Concrete Worker (Hired after 2/6/2016 - Last 1334 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: \$27.20
Supplemental Benefit Rate Per Hour: \$17.33

(Cement Concrete Workers District Council)

DERRICKPERSON & RIGGER (STONE)
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Derrickperson & Rigger (stone) - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Rate Per Hour: 50% of Journeyman's rate

Derrickperson & Rigger (stone) - Second Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

Derrickperson & Rigger (stone) - Second Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

Derrickperson & Rigger (stone) - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 90% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

(Local #197)

DOCKBUILDER/PILE DRIVER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Dockbuilder/Pile Driver (First Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 40% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: \$33.03

Dockbuilder/Pile Driver (Second Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 50% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: \$33.03

Dockbuilder/Pile Driver (Third Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 65% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: \$33.03

Dockbuilder/Pile Driver (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: \$33.03

(Carpenters District Council)

ELECTRICIAN

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Electrician (First Term: 0-6 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$14.00**

Supplemental Benefit Rate per Hour: **\$12.37**

Overtime Supplemental Rate Per Hour: **\$13.29**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$14.50**

Supplemental Benefit Rate per Hour: **\$12.63**

Overtime Supplemental Rate Per Hour: **\$13.58**

Electrician (First Term: 7-12 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$15.00**

Supplemental Benefit Rate per Hour: **\$12.88**

Overtime Supplemental Rate Per Hour: **\$13.87**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$15.50**

Supplemental Benefit Rate per Hour: **\$13.14**

Overtime Supplemental Rate Per Hour: **\$14.16**

Electrician (Second Term: 0-6 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$16.00**

Supplemental Benefit Rate per Hour: **\$13.39**

Overtime Supplemental Rate Per Hour: **\$14.44**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$16.50**

Supplemental Benefit Rate per Hour: **\$13.64**

Overtime Supplemental Rate Per Hour: **\$14.73**

Electrician (Second Term: 7-12 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$17.00**

Supplemental Benefit Rate per Hour: **\$13.90**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Overtime Supplemental Rate Per Hour: \$15.02

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: \$17.50

Supplemental Benefit Rate per Hour: \$14.15

Overtime Supplemental Rate Per Hour: \$15.31

Electrician (Third Term: 0-6 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: \$18.00

Supplemental Benefit Rate per Hour: \$14.41

Overtime Supplemental Rate Per Hour: \$15.59

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: \$18.50

Supplemental Benefit Rate per Hour: \$14.66

Overtime Supplemental Rate Per Hour: \$15.88

Electrician (Third Term: 7-12 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: \$19.00

Supplemental Benefit Rate per Hour: \$14.92

Overtime Supplemental Rate Per Hour: \$16.17

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: \$19.50

Supplemental Benefit Rate per Hour: \$15.17

Overtime Supplemental Rate Per Hour: \$16.45

Electrician (Fourth Term: 0-6 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: \$20.00

Supplemental Benefit Rate per Hour: \$15.43

Overtime Supplemental Rate Per Hour: \$16.74

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: \$20.50

Supplemental Benefit Rate per Hour: \$15.68

Overtime Supplemental Rate Per Hour: \$17.03

Electrician (Fourth Term: 7-12 Months)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: \$22.00

Supplemental Benefit Rate per Hour: \$16.44

Overtime Supplemental Rate Per Hour: \$17.89

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: \$22.50
Supplemental Benefit Rate per Hour: \$16.70
Overtime Supplemental Rate Per Hour: \$18.18

Electrician (Fifth Term: 0-12 Months)

Effective Period: 7/1/2017 - 5/9/2018
Wage Rate per Hour: \$24.00
Supplemental Benefit Rate per Hour: \$19.80
Overtime Supplemental Rate Per Hour: \$21.30

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: \$24.50
Supplemental Benefit Rate per Hour: \$20.30
Overtime Supplemental Rate Per Hour: \$21.84

Electrician (Fifth Term: 13-18 Months)

Effective Period: 7/1/2017 - 5/9/2018
Wage Rate per Hour: \$28.50
Supplemental Benefit Rate per Hour: \$22.10
Overtime Supplemental Rate Per Hour: \$23.89

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: \$29.00
Supplemental Benefit Rate per Hour: \$22.65
Overtime Supplemental Rate Per Hour: \$24.47

Overtime Description

Overtime Wage paid at time and one half the regular rate

(Local #3)

ELEVATOR CONSTRUCTOR

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Elevator (Constructor) - First Year

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$29.88

Effective Period: 3/17/2018 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$31.35

Elevator (Constructor) - Second Year

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.31

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$31.80

Elevator (Constructor) - Third Year

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$31.19

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$32.70

Elevator (Constructor) - Fourth Year

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$32.07

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$33.60

(Local #1)

ELEVATOR REPAIR & MAINTENANCE
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 2)

Elevator Service/Modernization Mechanic (First Year)

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Benefit Per Hour: \$29.80

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyperson's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Per Hour: \$31.28

Elevator Service/Modernization Mechanic (Second Year)

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Benefit Per Hour: \$30.23

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Benefit Per Hour: \$31.72

Elevator Service/Modernization Mechanic (Third Year)

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Per Hour: \$31.09

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Per Hour: \$32.60

Elevator Service/Modernization Mechanic (Fourth Year)

Effective Period: 7/1/2017 - 3/16/2018
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Per Hour: \$31.95

Effective Period: 3/17/2018 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Per Hour: \$33.49

(Local #1)

ENGINEER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

Engineer - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$24.77
Supplemental Benefit Rate per Hour: \$24.62

Engineer - Second Year

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$30.97
Supplemental Benefit Rate per Hour: \$24.62

Engineer - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$34.06
Supplemental Benefit Rate per Hour: \$24.62

Engineer - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$37.16
Supplemental Benefit Rate per Hour: \$24.62

(Local #15)

ENGINEER - OPERATING

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

Operating Engineer - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour 40% of Journeyman's Rate
Supplemental Benefit Per Hour: \$20.85

Operating Engineer - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's Rate
Supplemental Benefit Per Hour: \$20.85

Operating Engineer - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyman's Rate
Supplemental Benefit Per Hour: \$20.85

(Local #14)

FLOOR COVERER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Floor Coverer (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$31.14

Floor Coverer (Second Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$31.14

Floor Coverer (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Rate Per Hour: \$31.14

Floor Coverer (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$31.14

(Carpenters District Council)

GLAZIER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Glazier (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$15.26

Glazier (Second Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Rate Per Hour: \$25.36

Glazier (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$28.62

Glazier (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$34.67

(Local #1281)

HEAT & FROST INSULATOR
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Heat & Frost Insulator (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Heat & Frost Insulator (Second Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Heat & Frost Insulator (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 70% of Journeyman's rate

Heat & Frost Insulator (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #12)

HOUSE WRECKER
(TOTAL DEMOLITION)
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

House Wrecker - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$21.17**
Supplemental Benefit Rate per Hour: **\$18.54**

House Wrecker - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$22.32**
Supplemental Benefit Rate per Hour: **\$18.54**

House Wrecker - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$23.97**
Supplemental Benefit Rate per Hour: **\$18.54**

House Wrecker - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$26.53**
Supplemental Benefit Rate per Hour: **\$18.54**

(Mason Tenders District Council)

IRON WORKER - ORNAMENTAL
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Iron Worker (Ornamental) - 1st Ten Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: **\$39.40**

Iron Worker (Ornamental) - 11 -16 Months

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.62

Iron Worker (Ornamental) - 17 - 22 Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$41.83

Iron Worker (Ornamental) - 23 - 28 Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$44.27

Iron Worker (Ornamental) - 29 - 36 Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$46.70

(Local #580)

IRON WORKER - STRUCTURAL

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Iron Worker (Structural) - 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$26.12
Supplemental Benefit Rate per Hour: \$50.22

Iron Worker (Structural) - 7- 18 Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$26.72
Supplemental Benefit Rate per Hour: \$50.22

Iron Worker (Structural) - 19 - 36 months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$27.32

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$50.22

(Local #40 and #361)

**LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE
LAYER & COMMON)**

(Ratio Apprentice to Journeyperson: 1 to 1, 1 to 3)

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - First
1000 hours**

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.63

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) -
Second 1000 hours**

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.63

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) -
Third 1000 hours**

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.63

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) -
Fourth 1000 hours**

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.63

(Local #731)

MARBLE MECHANICS

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Cutters & Setters - First 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Cutters & Setters - Second 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

Cutters & Setters - Third 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

Cutters & Setters - Fourth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 75% of Journeyman's rate

Cutters & Setters - Fifth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 85% of Journeyman's rate

Cutters & Setters - Sixth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 95% of Journeyman's rate

Polishers & Finishers - First 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Polishers & Finishers - Second 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Polishers & Finishers - Third 750 Hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Polishers & Finishers - Fourth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 90% of Journeyperson's rate

(Local #7)

MASON TENDER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Mason Tender - First Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$21.39

Supplemental Benefit Rate per Hour: \$19.65

Mason Tender - Second Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$22.54

Supplemental Benefit Rate per Hour: \$19.65

Mason Tender - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$24.29

Supplemental Benefit Rate per Hour: \$19.70

Mason Tender - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$26.95

Supplemental Benefit Rate per Hour: \$19.70

(Local #79)

METALLIC LATHER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Metallic Lather (First Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$28.38**

Supplemental Benefit Rate per Hour: **\$10.96**

Metallic Lather (Second Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$32.38**

Supplemental Benefit Rate per Hour: **\$12.96**

Metallic Lather (Third Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$35.38**

Supplemental Benefit Rate per Hour: **\$17.12**

Metallic Lather (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$37.38**

Supplemental Benefit Rate per Hour: **\$17.92**

(Local #46)

MILLWRIGHT

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Millwright (First Year)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$28.33**

Supplemental Benefit Rate per Hour: **\$34.28**

Millwright (Second Year)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$33.48
Supplemental Benefit Rate per Hour: \$37.88

Millwright (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$38.63
Supplemental Benefit Rate per Hour: \$42.13

Millwright (Fourth Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$48.93
Supplemental Benefit Rate per Hour: \$48.69

(Local #740)

PAVER AND ROADBUILDER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Paver and Roadbuilder - First Year (Minimum 1000 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$27.86
Supplemental Benefit Rate per Hour: \$19.25

Paver and Roadbuilder - Second Year (Minimum 1000 hours)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$29.50
Supplemental Benefit Rate per Hour: \$19.25

(Local #1010)

PAINTER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Painter - Brush & Roller - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$17.00
Supplemental Benefit Rate per Hour: \$13.42

Painter - Brush & Roller - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$21.25
Supplemental Benefit Rate per Hour: \$17.43

Painter - Brush & Roller - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$25.50
Supplemental Benefit Rate per Hour: \$20.50

Painter - Brush & Roller - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$34.00
Supplemental Benefit Rate per Hour: \$26.20

(District Council of Painters)

PAINTER - METAL POLISHER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Metal Polisher (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$11.75
Supplemental Benefit Rate per Hour: \$5.13

Metal Polisher (Second Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$13.00
Supplemental Benefit Rate per Hour: \$5.13

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Metal Polisher (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$15.75**
Supplemental Benefit Rate per Hour: **\$5.13**

(Local 8A-28)

PAINTER - STRUCTURAL STEEL
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Painters - Structural Steel (First Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Painters - Structural Steel (Second Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Painters - Structural Steel (Third Year)

Effective Period: 7/1/2017 - 6/30/2018
Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #806)

PLASTERER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Plasterer - First Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: **\$13.59**

Plasterer - First Year: 2nd Six Months

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Rate Per Hour: \$14.07

Plasterer - Second Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$16.04

Plasterer - Second Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$17.12

Plasterer - Third Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$19.29

Plasterer - Third Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$20.37

(Local #530)

PLASTERER - TENDER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Plasterer Tender - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$21.39
Supplemental Benefit Rate per Hour: \$19.65

Plasterer Tender - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$22.54

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$19.65

Plasterer Tender - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$24.29

Supplemental Benefit Rate per Hour: \$19.70

Plasterer Tender - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$26.95

Supplemental Benefit Rate per Hour: \$19.70

(Local #79)

PLUMBER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Plumber - First Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$16.28

Supplemental Benefit Rate per Hour: \$5.43

Plumber - First Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$19.28

Supplemental Benefit Rate per Hour: \$6.43

Plumber - Second Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$26.35

Supplemental Benefit Rate per Hour: \$17.10

Plumber - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$28.45

Supplemental Benefit Rate per Hour: \$17.10

Plumber - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$31.30
Supplemental Benefit Rate per Hour: \$17.10

Plumber - Fifth Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$32.70
Supplemental Benefit Rate per Hour: \$17.10

Plumber - Fifth Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$44.77
Supplemental Benefit Rate per Hour: \$17.10

(Plumbers Local #1)

**POINTER, WATERPROOFER, CAULKER, SANDBLASTER,
STEAMBLASTER**

(Exterior Building Renovation)
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$25.89
Supplemental Benefit Rate per Hour: \$13.64

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$28.97
Supplemental Benefit Rate per Hour: \$18.15

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$34.12
Supplemental Benefit Rate per Hour: \$20.90

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$41.33

Supplemental Benefit Rate per Hour: \$21.60

(Bricklayer District Council)

ROOFER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Rofer - First Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 35% of Journeyman's Rate

Rofer - Second Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyman's Rate

Rofer - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 60% of Journeyman's Rate

Rofer - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 75% of Journeyman's Rate

(Local #8)

SHEET METAL WORKER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Sheet Metal Worker (0-6 Months)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 25% of Journeyperson's rate
Supplemental Rate Per Hour: \$6.35

Sheet Metal Worker (7-18 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 35% of Journeyperson's rate
Supplemental Rate Per Hour: \$17.12

Sheet Metal Worker (19-30 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Rate Per Hour: \$23.54

Sheet Metal Worker (31-36 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$27.70

Sheet Metal Worker (37-42 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$29.11

Sheet Metal Worker (43-48 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$33.96

Sheet Metal Worker (49-54 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$36.07

Sheet Metal Worker (55-60 Months)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$38.15

(Local #28)

SIGN ERECTOR

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Sign Erector - First Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 35% of Journeyman's rate
Supplemental Rate Per Hour: \$14.72

Sign Erector - First Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$16.71

Sign Erector - Second Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 45% of Journeyman's rate
Supplemental Rate Per Hour: \$18.68

Sign Erector - Second Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$20.68

Sign Erector - Third Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$27.72

Sign Erector - Third Year: 2nd Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$30.57

Sign Erector - Fourth Year: 1st Six Months

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Rate Per Hour: \$33.31

Sign Erector - Fourth Year: 2nd Six Months

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$35.83

Sign Erector - Fifth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$38.32

Sign Erector - Sixth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.81

(Local #137)

STEAMFITTER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Steamfitter - First Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate and Supplemental Per Hour: 40% of Journeyperson's rate

Steamfitter - Second Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate and Supplemental Rate Per Hour: 50% of Journeyperson's rate.

Steamfitter - Third Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate and Supplemental Rate per Hour: 65% of Journeyperson's rate.

Steamfitter - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate and Supplemental Rate Per Hour: 80% of Journeyperson's rate.

Steamfitter - Fifth Year

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate and Supplemental Rate Per Hour: 85% of Journeyperson's rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #638)

STONE MASON - SETTER

(Ratio Apprentice of Journeyperson: 1 to 1, 1 to 2)

Stone Mason - Setters - First 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Second 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 60% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Third 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 70% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fourth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fifth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 90% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Sixth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 100% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

(Bricklayers District Council)

TAPER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Drywall Taper - First Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Drywall Taper - Second Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Drywall Taper - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #1974)

TILE LAYER - SETTER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Tile Layer - Setter - First 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Tile Layer - Setter - Second 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

Tile Layer - Setter - Third 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

Tile Layer - Setter - Fourth 750 Hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Tile Layer - Setter - Fifth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 85% of Journeyperson's rate

Tile Layer - Setter - Sixth 750 Hours

Effective Period: 7/1/2017 - 6/30/2018

Wage and Supplemental Rate Per Hour: 95% of Journeyperson's rate

(Local #7)

TIMBERPERSON

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Timberperson - First Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 40% of Journeyperson's rate

Supplemental Rate Per Hour: \$32.79

Timberperson - Second Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 50% of Journeyperson's rate

Supplemental Rate Per Hour: \$32.79

Timberperson - Third Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 65% of Journeyperson's rate

Supplemental Rate Per Hour: \$32.79

Timberperson - Fourth Year

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Rate Per Hour: \$32.79

(Local #1536)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

LABOR LAW §220 PREVAILING WAGE SCHEDULE

Workers, Laborers and Mechanics employed on a public work project must receive not less than the prevailing rate of wage and benefits for the classification of work performed by each upon such public work. Pursuant to Labor Law §220 the Comptroller of the City of New York has promulgated this schedule solely for Workers, Laborers and Mechanics engaged by private contractors on New York City public work contracts.

This schedule is a compilation of separate determinations of the prevailing rate of wage and supplements made by the Comptroller for each trade classification listed herein pursuant to New York State Labor Law section 220 (5). The source of the wage and supplement rates, whether a collective bargaining agreement, survey data or other, is listed at the end of each classification.

Agency Chief Contracting Officers should contact the Bureau of Labor Law's Classification Unit with any questions concerning trade classifications, prevailing rates or prevailing practices with respect to procurement on New York City public works contracts. Contractors are advised to review the Comptroller's Prevailing Wage Schedule before bidding on public works contracts. Contractors with questions concerning trade classifications, prevailing rates or prevailing practices with respect to public works contracts in the procurement stage must contact the contracting agency responsible for the procurement.

Any error as to compensation under the prevailing wage law or other information as to trade classification, made by the contracting agency in the contract documents or in any other communication, will not preclude a finding against the contractor of prevailing wage violation.

Any questions concerning trade classifications, prevailing rates or prevailing practices on New York City public works contracts that have already been awarded may be directed to the Bureau of Labor Law's Classification Unit by calling (212) 669-4443. All callers must have the agency name and contract registration number available when calling with questions on public works contracts. Please direct all other compliance issues to: Bureau of Labor Law, Attn: Wasyl Kinach, P.E., Office of the Comptroller, 1 Centre Street, Room 651, New York, N.Y. 10007; Fax (212) 669-4002.

The appropriate schedule of prevailing wages and benefits must be posted at all public work sites pursuant to Labor Law §220 (3-a) (a).

This schedule is applicable to work performed during the effective period, unless otherwise noted. Changes to this schedule are published on our web site www.comptroller.nyc.gov. Contractors must pay the wages and supplements in effect when the worker, laborer, mechanic performs the work. Preliminary schedules for future one-year periods appear in the City Record on or about June 1 each succeeding year. Final schedules appear on or about July 1 in the City Record and on our web site www.comptroller.nyc.gov.

The Comptroller's Office has attempted to include all overtime, shift and night differential, Holiday, Saturday, Sunday or other premium time work. However, this schedule does not set forth every prevailing practice with respect to such rates with which employers must comply. All such practices are nevertheless part of the employer's prevailing wage obligation and contained in the collective bargaining agreements of the prevailing wage unions. These collective bargaining agreements are available for inspection by appointment. Requests for appointments may be made by calling (212) 669-4443, Monday through Friday between the hours of 9 a.m. and 5 p.m.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Prevailing rates and ratios for apprentices are attached to this schedule in the Appendix. Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant, registered with the New York State Department of Labor, may be employed on a public work project. Workers who are not journey persons or not registered apprentices pursuant to Labor Law §220 (3-e) may not be substituted for apprentices and must be paid as journey persons.

Public Work construction, reconstruction, demolition, excavation, rehabilitation, repair, renovation, alteration, or improvement contracts awarded pursuant to a Project Labor Agreement ("PLA") in accordance with Labor Law section 222 may have different labor standards for shift, premium and overtime work. Please refer to the PLA's pre-negotiated labor agreements for wage and benefit rates applicable to work performed outside of the regular workday. More information is available at the Mayor's Office of Contract Services (MOCS) web page at <http://www.nyc.gov/html/mocs/html/vendors/pla.shtml>.

All the provisions of Labor Law section 220 remain applicable to PLA work including, but not limited to, the enforcement of prevailing wage requirements by the Comptroller; however, we will enforce shift, premium, overtime and other non-standard rates as they appear in a project's pre-negotiated labor agreement.

In order to meet their obligation to provide prevailing supplemental benefits to each covered employee, employers must either:

- 1) Provide bona fide fringe benefits which cost the employer no less than the prevailing supplemental benefits rate; or
- 2) Supplement the employee's hourly wage by an amount no less than the prevailing supplemental benefits rate; or
- 3) Provide a combination of bona fide fringe benefits and wage supplements which cost the employer no less than the prevailing supplemental benefits rate in total.

Although prevailing wage laws do not require employers to provide bona fide fringe benefits (as opposed to wage supplements) to their employees, other laws may. For example, the Employee Retirement Income Security Act, 29 U.S.C. § 1001 et seq., the Patient Protection and Affordable Care Act, 42 U.S.C. § 18001 et seq., and the New York City Paid Sick Leave Law, N.Y.C. Admin. Code § 20-911 et seq., require certain employers to provide certain benefits to their employees. Labor agreements to which employers are a party may also require certain benefits. The Comptroller's Office does not enforce these laws or agreements.

Employers must provide prevailing supplemental benefits at the straight time rate for each hour worked unless otherwise noted in the classification.

Wasył Kinach, P.E.
Director of Classifications
Bureau of Labor Law

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
 §220 PREVAILING WAGE SCHEDULE

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER	5
BLASTER	5
BOILERMAKER.....	7
BRICKLAYER.....	8
CARPENTER - BUILDING COMMERCIAL	9
CARPENTER - HEAVY CONSTRUCTION WORK	10
CARPENTER - HIGH RISE CONCRETE FORMS	11
CARPENTER - SIDEWALK SHED, SCAFFOLD AND HOIST.....	12
CEMENT & CONCRETE WORKER.....	13
CEMENT MASON.....	14
CORE DRILLER	15
DERRICKPERSON AND RIGGER	16
DIVER.....	17
DOCKBUILDER - PILE DRIVER.....	18
DRIVER: TRUCK (TEAMSTER)	19
ELECTRICIAN	21
ELECTRICIAN - ALARM TECHNICIAN.....	24
ELECTRICIAN-STREET LIGHTING WORKER	25
ELEVATOR CONSTRUCTOR	26
ELEVATOR REPAIR & MAINTENANCE.....	27
ENGINEER	28
ENGINEER - CITY SURVEYOR AND CONSULTANT.....	33
ENGINEER - FIELD (BUILDING CONSTRUCTION)	34
ENGINEER - FIELD (HEAVY CONSTRUCTION)	35
ENGINEER - FIELD (STEEL ERECTION)	36
ENGINEER - OPERATING	37
FLOOR COVERER	45
GLAZIER	46
GLAZIER - REPAIR & MAINTENANCE	47
HEAT AND FROST INSULATOR	48
HOUSE WRECKER.....	49
IRON WORKER - ORNAMENTAL.....	49
IRON WORKER - STRUCTURAL.....	50
LABORER	51
LANDSCAPING.....	52

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

MARBLE MECHANIC.....	54
MASON TENDER	55
MASON TENDER (INTERIOR DEMOLITION WORKER).....	56
METALLIC LATHER.....	56
MILLWRIGHT	57
MOSAIC MECHANIC.....	58
PAINTER	59
PAINTER - METAL POLISHER.....	60
PAINTER - STRIPER.....	61
PAINTER - STRUCTURAL STEEL.....	62
PAPERHANGER	63
PAVER AND ROADBUILDER.....	64
PLASTERER	66
PLASTERER - TENDER.....	67
PLUMBER	67
PLUMBER (MECHANICAL EQUIPMENT AND SERVICE).....	68
PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION).....	69
PLUMBER: PUMP & TANK.....	70
POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER	71
ROOFER.....	72
SHEET METAL WORKER.....	72
SHEET METAL WORKER - SPECIALTY	73
SHIPYARD WORKER.....	74
SIGN ERECTOR.....	76
STEAMFITTER	76
STEAMFITTER - REFRIGERATION AND AIR CONDITIONER	78
STONE MASON - SETTER.....	80
TAPER.....	81
TELECOMMUNICATION WORKER.....	82
TILE FINISHER.....	83
TILE LAYER - SETTER	84
TIMBERPERSON	84
TUNNEL WORKER	85
WELDER.....	87

ASBESTOS HANDLER

(Hazardous Material; Disturbs, removes, encapsulates, repairs, or encloses friable asbestos material)

Asbestos Handler

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$36.00**

Supplemental Benefit Rate per Hour: **\$16.45**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Time and one half the regular hourly rate after 40 hours in any work week.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Easter

Paid Holidays

None

(Local #78 and Local #12A)

BLASTER

Blaster

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.27**

Supplemental Benefit Rate per Hour: **\$47.99**

Blaster (Hydraulic)

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$47.15
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Trac Drill Hydraulic

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$41.29
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Wagon: Air Trac: Quarry Bar: Drillrunners

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$40.46
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Operators of Jack Hammers

Chippers: Spaders: Concrete Breakers: and all other pneumatic tools of like usage: Walk Behind Self Propelled Hydraulic Asphalt and Concrete Breakers: Hydro (Water) Demolition

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$39.34
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Powder Carriers

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$35.17
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Hydraulic Trac Drill Chuck Tender

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$33.81
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Chuck Tender & Nipper

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$33.00
Supplemental Benefit Rate per Hour: \$47.99

Blaster - Magazine Keepers: (Watch Person)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$18.22
Supplemental Benefit Rate per Hour: \$47.99

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Description

Magazine Keepers:

Time and one half for work performed in excess of forty (40) hours per week and for work performed on Saturdays, Sundays and Holidays.

All Other Employees:

Time and one-half for the first two hours of overtime Monday through Friday, the first ten hours, the first ten hours of work on Saturday and for Make-up Time. Double time for all hours over ten Monday through Saturday (except make-up hours) and for all hours worked on Sunday and Holidays.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

A single shift shall be 8 hours plus an unpaid lunch, starting at 8:00 A.M (or between 6:00 A.M. and 10:00 A.M. on weekdays). When two (2) shifts are employed, each shift shall be 8 hours plus ½ hour unpaid lunch. When three (3) shifts are employed, each shift will work seven and one-half (7 ½) hours, but will be paid for eight (8) hours, since only one-half (½) hour is allowed for mealtime. When two (2) or more shifts are employed, single time will be paid for each shift. The first 8 hours of any and all work performed Monday through Friday inclusive of any off-shift shall be at the single time rate.

(Local #29)

BOILERMAKER

Boilermaker

Effective Period: 7/1/2017 - 12/31/2017

Wage Rate per Hour: **\$55.23**

Supplemental Benefit Rate per Hour: **\$42.96**

Supplemental Note: For time and one half overtime - \$63.82 For double overtime - \$84.68

Effective Period: 1/1/2018 - 6/30/2018

Wage Rate per Hour: **\$57.17**

Supplemental Benefit Rate per Hour: **\$43.62**

Supplemental Note: For time and one half overtime - \$64.81 For double overtime - \$86.00

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Description

For Repair and Maintenance work:

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

For New Construction work:

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Quadruple time the regular rate for work on the following holiday(s).

Labor Day

Paid Holidays

Good Friday

Day after Thanksgiving

Day before Christmas

Day before New Year's Day

Shift Rates

When shifts are required, the first shift shall work eight (8) hours at the regular straight-time hourly rate. The second shift shall work seven and one-half (7 ½) hours and receive eight hours at the regular straight time hourly rate plus twenty-five cents (\$0.25) per hour. The third shift shall work seven (7) hours and receive eight hours at the regular straight time hourly rate plus fifty cents (\$0.50) per hour. A thirty (30) minute lunch period shall not be considered as time worked. Work in excess of the above shall be paid overtime at the appropriate new construction work or repair work overtime wage and supplemental benefit hourly rate.

(Local #5)

BRICKLAYER

Bricklayer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$55.10

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$31.20

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Overtime rates to be paid outside the regular scheduled work day.

(Bricklayer District Council)

CARPENTER - BUILDING COMMERCIAL

Building Commercial

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$52.50

Supplemental Benefit Rate per Hour: \$46.28

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

The second shift will receive one hour at the double time rate of pay for the last hour of the shift; eight hours pay for seven hours of work, nine hours pay for eight hours of work. There must be a first shift in order to work a second shift.

(Carpenters District Council)

CARPENTER - HEAVY CONSTRUCTION WORK (Construction of Engineering Structures and Building Foundations)

Heavy Construction Work

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$52.63**

Supplemental Benefit Rate per Hour: **\$49.66**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Carpenters District Council)

CARPENTER - HIGH RISE CONCRETE FORMS
(Excludes Engineering Structures and Building Foundations)

Carpenter High Rise A

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$50.78**

Supplemental Benefit Rate per Hour: **\$41.49**

Carpenter High Rise B

Carpenter High Rise B worker is excluded from high risk operations such as erection decking, perimeter debris netting, leading edge work, self-climbing form systems, and the installation of cocoon systems unless directly supervised by a Carpenter High Rise A worker.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$39.07**

Supplemental Benefit Rate per Hour: **\$16.65**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

The second shift wage rate shall be 113% of the straight time hourly wage rate. There must be a first shift in order to work a second shift.

(Carpenters District Council)

CARPENTER - SIDEWALK SHED, SCAFFOLD AND HOIST

Carpenter - Hod Hoist

(Assisted by Mason Tender)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$50.50**

Supplemental Benefit Rate per Hour: **\$39.46**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Shift Rates

The second shift will receive one hour at the double time rate of pay for the last hour of the shift; eight hours pay for seven hours of work, nine hours pay for eight hours of work. There must be a first shift in order to work a second shift.

(Carpenters District Council)

CEMENT & CONCRETE WORKER

Cement & Concrete Worker

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$42.48

Supplemental Benefit Rate per Hour: \$26.00

Supplemental Note: \$29.50 on Saturdays; \$33.00 on Sundays & Holidays

Cement & Concrete Worker - (Hired after 2/6/2016)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$32.00

Supplemental Benefit Rate per Hour: \$18.00

Supplemental Note: \$19.50 on Saturdays; \$21.00 on Sundays & Holidays

Overtime Description

Time and one half the regular rate after 7 hour day (time and one half the regular rate after an 8 hour day when working with Dockbuilders on pile cap forms and for work below street level to the top of the foundation wall, not to exceed 2 feet or 3 feet above the sidewalk-brick shelf, when working on the foundation and structure.)

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

1/2 day before Christmas Day
1/2 day before New Year's Day

Shift Rates

On shift work extending over a twenty-four hour period, all shifts are paid at straight time.

(Cement Concrete Workers District Council)

CEMENT MASON

Cement Mason

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$42.62**

Supplemental Benefit Rate per Hour: **\$38.96**

Supplemental Note: For time and one half overtime - \$48.21; For double overtime - \$57.46

Overtime Description

Time and one-half the regular rate after an 8 hour day, double time the regular rate after 10 hours. Time and one-half the regular rate on Saturday, double time the regular rate after 10 hours. Double time the regular rate on Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

Shift Rates

For an off shift day, (work at times other than the regular 7:00 A.M. to 3:30 P.M. work day) a cement mason shall be paid at the regular hourly rate plus a 25% per hour differential. Four Days a week at Ten (10)hour day.

(Local #780) (BCA)

CORE DRILLER

Core Driller

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$38.82
Supplemental Benefit Rate per Hour: \$24.66

Core Driller Helper

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$30.96
Supplemental Benefit Rate per Hour: \$24.66

Core Driller Helper(Third year in the industry)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$27.86
Supplemental Benefit Rate per Hour: \$24.66

Core Driller Helper (Second year in the industry)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$24.77
Supplemental Benefit Rate per Hour: \$24.66

Core Driller Helper (First year in the industry)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$21.67
Supplemental Benefit Rate per Hour: \$24.66

Overtime Description

Time and one half the regular rate for work on a holiday plus Holiday pay when worked.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Memorial Day
Independence Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Labor Day
Thanksgiving Day
Christmas Day

Shift Rates

The shift day shall be the continuous eight and one-half (8½) hours from 6:00 A.M. to 2:30 P.M. and from 2:30 P.M. to 11:00 P.M., including one-half (½) hour of employees regular rate of pay for lunch. When two (2) or more shifts are employed, single time shall be paid for each shift, but those employees employed on a shift other than from 8:00 A.M. to 5:00 P.M. shall, in addition, receive seventy-five cents (\$0.75) per hour differential for each hour worked. When three (3) shifts are needed, each shift shall work seven and one-half (7 ½) hours paid for eight (8) hours of labor and be permitted one-half (½) hour for mealtime.

(Carpenters District Council)

DERRICKPERSON AND RIGGER

Derrick Person & Rigger

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.86**

Supplemental Benefit Rate per Hour: **\$51.40**

Supplemental Note: The above supplemental rate applies for work performed in Manhattan, Bronx, Brooklyn and Queens. \$52.82 - For work performed in Staten Island.

Derrick Person & Rigger - Site Work

Assists the Stone Mason-Setter in the setting of stone

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$40.29**

Supplemental Benefit Rate per Hour: **\$39.23**

Overtime Description

The first two hours of overtime on weekdays and the first seven hours of work on Saturdays are paid at time and one half for wages and supplemental benefits. All additional overtimes is paid at double time for wages and supplemental benefits. Deduct \$1.42 from the Staten Island hourly benefits rate before computing overtime.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday
Memorial Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

(Local #197)

DIVER

Diver (Marine)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$66.66**

Supplemental Benefit Rate per Hour: **\$49.66**

Diver Tender (Marine)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$47.34**

Supplemental Benefit Rate per Hour: **\$49.66**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Shift Rates

When three shifts are utilized each shift shall work seven and one half-hours (7 1/2 hours) and paid for 8 hours, allowing for one half hour for lunch.

(Carpenters District Council)

DOCKBUILDER - PILE DRIVER

Dockbuilder - Pile Driver

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$52.63**

Supplemental Benefit Rate per Hour: **\$49.66**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Carpenters District Council)

DRIVER: TRUCK (TEAMSTER)

Driver - Dump Truck

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$41.18

Supplemental Benefit Rate per Hour: \$44.79

Supplemental Note: Over 40 hours worked: at time and one half rate - \$19.94; at double time rate - \$26.58

Driver - Tractor Trailer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$42.22

Supplemental Benefit Rate per Hour: \$45.40

Supplemental Note: Over 40 hours worked: at time and one half rate - \$17.55; at double time rate - \$23.40

Driver - Euclid & Turnapull Operator

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$42.78

Supplemental Benefit Rate per Hour: \$45.40

Supplemental Note: Over 40 hours worked: at time and one half rate - \$17.55 at double time rate - \$23.40

Overtime Description

For Paid Holidays: Holiday pay for all holidays shall be prorated based two hours per day for each day worked in the holiday week, not to exceed 8 hours of holiday pay. For Thanksgiving week, the prorated share shall be 5 1/3 hours of holiday pay for each day worked in Thanksgiving week.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

New Year's Day

President's Day

Memorial Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

Off single shift work commencing between 6:00 P.M. and 5:00 A.M. shall work eight and one half hours allowing for one half hour for lunch and receive 9 hours pay for 8 hours of work.

Driver Redi-Mix (Sand & Gravel)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$38.40**

Supplemental Benefit Rate per Hour: **\$42.12**

Supplemental Note: Over 40 hours worked: time and one half rate \$15.99, double time rate \$21.33

Overtime Description

For Paid Holidays: Employees working two (2) days in the calendar week in which the holiday falls are to paid for these holidays, provided they shape each remaining workday during that calendar week.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

President's Day
Columbus Day
Veteran's Day

Triple time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Election Day
Thanksgiving Day
Christmas Day

(Local #282)

ELECTRICIAN

(Including all low voltage cabling carrying data; video; and voice in combination with data and or video.)

Electrician "A" (Regular Day / Day Shift)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$56.00**

Supplemental Benefit Rate per Hour: **\$54.35**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$56.00**

Supplemental Benefit Rate per Hour: **\$55.72**

Electrician "A" (Regular Day Overtime after 7 hrs / Day Shift Overtime after 8 hrs)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$84.00**

Supplemental Benefit Rate per Hour: **\$57.86**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$84.00**

Supplemental Benefit Rate per Hour: **\$59.23**

Electrician "A" (Swing Shift)

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$65.71**

Supplemental Benefit Rate per Hour: **\$61.94**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$65.71**

Supplemental Benefit Rate per Hour: **\$63.52**

Electrician "A" (Swing Shift Overtime After 7.5 hours)

Effective Period: 7/1/2017 - 5/9/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$98.57**
Supplemental Benefit Rate per Hour: **\$66.05**

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: **\$98.57**
Supplemental Benefit Rate per Hour: **\$67.64**

Electrician "A" (Graveyard Shift)

Effective Period: 7/1/2017 - 5/9/2018
Wage Rate per Hour: **\$73.60**
Supplemental Benefit Rate per Hour: **\$68.33**

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: **\$73.60**
Supplemental Benefit Rate per Hour: **\$70.09**

Electrician "A" (Graveyard Shift Overtime After 7 hours)

Effective Period: 7/1/2017 - 5/9/2018
Wage Rate per Hour: **\$110.40**
Supplemental Benefit Rate per Hour: **\$72.95**

Effective Period: 5/10/2018 - 6/30/2018
Wage Rate per Hour: **\$110.40**
Supplemental Benefit Rate per Hour: **\$74.70**

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on a holiday.

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

When so elected by the Employer, one or more shifts of at least five days duration may be scheduled as follows:
Day Shift: 8:00 am to 4:30 pm, Swing Shift 4:30 pm to 12:30 am, Graveyard Shift: 12:30 am to 8:00 am.

For multiple shifts of temporary light and/or power, the temporary light and/or power employee shall be paid for 8 hours at the straight time rate. For three or less workers performing 8 hours temporary light and/or power the supplemental benefit rate is \$25.67 and effective 5/10/18 \$25.92.

Electrician "M" (First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$28.50**

Supplemental Benefit Rate per Hour: **\$22.10**

First and Second Year "M" Wage Rate Per Hour: **\$24.00**

First and Second Year "M" Supplemental Rate: **\$19.80**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$29.00**

Supplemental Benefit Rate per Hour: **\$22.65**

First and Second Year "M" Wage Rate Per Hour: **\$24.50**

First and Second Year "M" Supplemental Rate: **\$20.30**

Electrician "M" (Overtime After First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2017 - 5/9/2018

Wage Rate per Hour: **\$42.75**

Supplemental Benefit Rate per Hour: **\$23.89**

First and Second Year "M" Wage Rate Per Hour: **\$36.00**

First and Second Year "M" Supplemental Rate: **\$21.30**

Effective Period: 5/10/2018 - 6/30/2018

Wage Rate per Hour: **\$43.50**

Supplemental Benefit Rate per Hour: **\$24.47**

First and Second Year "M" Wage Rate Per Hour: **\$36.75**

First and Second Year "M" Supplemental Rate: **\$21.84**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #3)

ELECTRICIAN - ALARM TECHNICIAN

(Scope of Work - Inspect, test, repair, and replace defective, malfunctioning, or broken devices, components and controls of Fire, Burglar and Security Systems)

Alarm Technician

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$32.40**

Supplemental Benefit Rate per Hour: **\$16.10**

Supplemental Note: \$14.60 only after 8 hours worked in a day

Overtime Description

Time and one half the regular rate for work on the following holidays: Columbus Day, Veterans Day, Day after Thanksgiving.

Double time the regular rate for work on the following holidays: New Year's day, Martin Luther King Jr. Day, President's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Paid Holidays

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

Night Differential is based upon a ten percent (10%) differential between the hours of 4:00 P.M. and 12:30 A.M. and a fifteen percent (15%) differential for the hours 12:00 A.M. to 8:00 A.M.

Vacation

At least 1 year of employment.....ten (10) days
5 years or more of employment.....fifteen (15) days
10 years of employment.....twenty (20) days
Plus one Personal Day per year

Sick Days:

One day per Year. Up to 4 vacation days may be used as sick days.

(Local #3)

ELECTRICIAN-STREET LIGHTING WORKER

Electrician - Electro Pole Electrician

Effective Period: 7/1/2017 - 5/15/2018
Wage Rate per Hour: \$56.00
Supplemental Benefit Rate per Hour: \$56.26

Effective Period: 5/16/2018 - 6/30/2018
Wage Rate per Hour: \$56.00
Supplemental Benefit Rate per Hour: \$57.63

Electrician - Electro Pole Foundation Installer

Effective Period: 7/1/2017 - 5/15/2018
Wage Rate per Hour: \$41.54
Supplemental Benefit Rate per Hour: \$41.02

Effective Period: 5/16/2018 - 6/30/2018
Wage Rate per Hour: \$42.16
Supplemental Benefit Rate per Hour: \$42.19

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Electrician - Electro Pole Maintainer

Effective Period: 7/1/2017 - 5/16/2018

Wage Rate per Hour: **\$35.58**

Supplemental Benefit Rate per Hour: **\$36.89**

Effective Period: 5/17/2018 - 6/30/2018

Wage Rate per Hour: **\$36.11**

Supplemental Benefit Rate per Hour: **\$37.93**

Overtime Description

Electrician - Electro Pole Electrician: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week.

Electrician - Electro Pole Foundation Installer: Time and one half the regular rate after 8 hours within a 24 hour period and Saturday and Sunday.

Electrician - Electro Pole Maintainer: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week. Saturdays and Sundays may be used as a make-up day at straight time when a day is lost during the week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Local #3)

ELEVATOR CONSTRUCTOR

Elevator Constructor

Effective Period: 7/1/2017 - 3/16/2018

Wage Rate per Hour: **\$62.64**

Supplemental Benefit Rate per Hour: **\$34.25**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Effective Period: 3/17/2018 - 6/30/2018

Wage Rate per Hour: \$64.48

Supplemental Benefit Rate per Hour: \$35.85

Overtime Description

For New Construction: work performed after 7 or 8 hour day, Saturday, Sunday or between 4:30pm and 7:00am shall be paid at double time rate.

Existing buildings: work performed after an 8 hour day, Saturday, Sunday or between 5:30pm and 7:00 am shall be paid time and one half.

Overtime

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ELEVATOR REPAIR & MAINTENANCE

Elevator Service/Modernization Mechanic

Effective Period: 7/1/2017 - 3/16/2018

Wage Rate per Hour: \$49.14

Supplemental Benefit Rate per Hour: \$34.11

Effective Period: 3/17/2018 - 6/30/2018

Wage Rate per Hour: \$50.49

Supplemental Benefit Rate per Hour: \$35.71

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Description

For Scheduled Service Work: Double time - work scheduled in advance by two or more workers performed on Sundays, Holidays, and between midnight and 7:00am.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Afternoon shift - regularly hourly rate plus a (15%) fifteen percent differential. Graveyard shift - time and one half the regular rate.

Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ENGINEER

Engineer - Heavy Construction Operating Engineer I

Cherrypickers 20 tons and over and Loaders (rubber tired and/or tractor type with a manufacturer's minimum rated capacity of six cubic yards and over).

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$67.32**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$107.71**

Engineer - Heavy Construction Operating Engineer II

Backhoes, Basin Machines, Groover, Mechanical Sweepers, Bobcat, Boom Truck, Barrier Transport (Barrier Mover) & machines of similar nature. Operation of Churn Drills and machines of a similar nature, Stetco Silent Hoist and machines of similar nature, Vac-Alls, Meyers Machines, John Beam and machines of a similar nature, Ross Carriers and Travel Lifts and machines of a similar nature, Bulldozers, Scrapers and Turn-a-Pulls: Tugger Hoists (Used exclusively for handling excavated material); Tractors with attachments, Hyster and Roustabout Cranes, Cherrypickers. Austin Western, Grove and machines of a similar nature, Scoopmobiles, Monorails, Conveyors, Trenchers: Loaders-Rubber Tired and Tractor: Barber Greene and Eimco Loaders and Eimco Backhoes; Mighty Midget and similar breakers and Tampers, Curb and Gutter Pavers and Motor Patrol, Motor Graders and all machines of a similar nature. Locomotives 10 Tons or under. Mini-Max, Break-Tech and machines of a similar nature; Milling machines, robotic and demolition machines and machines of a similar nature, shot blaster, skid steer machines and machines of a similar nature including bobcat, pile rig rubber-tired excavator (37,000 lbs. and under), 2 man auger.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$65.31**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$104.50**

Engineer - Heavy Construction Operating Engineer III

Minor Equipment such as Tractors, Post Hole Diggers, Ditch Witch (Walk Behind), Road Finishing Machines, Rollers five tons and under, Tugger Hoists, Dual Purpose Trucks, Fork Lifts, and Dempsey Dumpers, Fireperson.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$61.93**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$99.09**

Engineer - Heavy Construction Maintenance Engineer I

Installing, Repairing, Maintaining, Dismantling and Manning of all equipment including Steel Cutting, Bending and Heat Sealing Machines, Mechanical Heaters, Grout Pumps, Bentonite Pumps & Plants, Screening Machines, Fusion Coupling Machines, Tunnel Boring Machines Moles and Machines of a similar nature, Power Packs, Mechanical Hydraulic Jacks; all drill rigs including but not limited to Churn, Rotary Caisson, Raised Bore & Drills of a similar nature; Personnel, Inspection & Safety Boats or any boats used to perform functions of same, Mine Hoists, Whirlies, all Climbing Cranes, all Tower Cranes, including but not limited to Truck Mounted and Crawler Type and machines of similar nature; Maintaining Hydraulic Drills and machines of a similar nature; Well Point System-Installation and dismantling; Burning, Welding, all Pumps regardless of size and/or motor power, except River Cofferdam Pumps and Wells Point Pumps; Motorized Buggies (three or more); equipment used in the cleaning and televising of sewers, but not limited to jet-rodder/vacuum truck, vacall/vactor, closed circuit television inspection equipment; high powered water pumps, jet pumps; screed machines and concrete finishing machines of a similar nature; vermeers.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$65.00**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$104.00**

Engineer - Heavy Construction Maintenance Engineer II

On Base Mounted Tower Cranes

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$85.53**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$136.85**

Engineer - Heavy Construction Maintenance Engineer III

On Generators, Light Towers

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$42.73**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$68.37**

Engineer - Heavy Construction Maintenance Engineer IV

On Pumps and Mixers including mud sucking

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$43.86**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$70.18**

Engineer - Heavy Construction Oilers I

Gradalls, Cold Planer Grader, Concrete Pumps, Driving Truck Cranes, Driving and Operating Fuel and Grease Trucks.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$58.57**

Supplemental Benefit Rate per Hour: **\$36.87**

Supplemental Note: \$66.34 on overtime

Shift Wage Rate: **\$93.71**

Engineer - Heavy Construction Oilers II

All gasoline, electric, diesel or air operated Shovels, Draglines, Backhoes, Keystones, Pavers, Gunite Machines, Battery of Compressors, Crawler Cranes, two-person Trenching Machines.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$40.36**

Supplemental Benefit Rate per Hour: **\$36.87**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: \$66.34 on overtime
Shift Wage Rate: \$64.58

Engineer - Steel Erection Maintenance Engineers

Derrick, Travelers, Tower, Crawler Tower and Climbing Cranes

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$61.13
Supplemental Benefit Rate per Hour: \$35.41
Supplemental Note: \$63.67 on overtime
Shift Wage Rate: \$97.81

Engineer - Steel Erection Oiler I

On a Truck Crane

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$57.21
Supplemental Benefit Rate per Hour: \$35.41
Supplemental Note: \$63.67 on overtime
Shift Wage Rate: \$91.54

Engineer - Steel Erection Oiler II

On a Crawler Crane

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$43.54
Supplemental Benefit Rate per Hour: \$35.41
Supplemental Note: \$63.67 on overtime
Shift Wage Rate: \$69.66

Overtime Description

On jobs of more than one shift, if the next shift employee fails to report for work through any cause over which the employer has no control, the employee on duty who works the next shift continues to work at the single time rate.

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.
Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Engineer - Building Work Maintenance Engineers I

Installing, repairing, maintaining, dismantling (of all equipment including: Steel Cutting and Bending Machines, Mechanical Heaters, Mine Hoists, Climbing Cranes, Tower Cranes, Linden Peine, Lorain, Liebherr, Mannes, or machines of a similar nature, Well Point Systems, Deep Well Pumps, Concrete Mixers with loading Device, Concrete Plants, Motor Generators when used for temporary power and lights), skid steer machines of a similar nature including bobcat.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$58.30**

Supplemental Benefit Rate per Hour: **\$35.41**

Supplemental Note: \$63.67 on overtime

Engineer - Building Work Maintenance Engineers II

On Pumps, Generators, Mixers and Heaters

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$45.28**

Supplemental Benefit Rate per Hour: **\$35.41**

Supplemental Note: \$63.67 on overtime

Engineer - Building Work Oilers I

All gasoline, electric, diesel or air operated Gradealls: Concrete Pumps, Overhead Cranes in Power Houses: Their duties shall be to assist the Engineer in oiling, greasing and repairing of all machines; Driving Truck Cranes: Driving and Operating Fuel and Grease Trucks, Cherrypickers (hydraulic cranes) over 70,000 GVW, and machines of a similar nature.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$55.42**

Supplemental Benefit Rate per Hour: **\$35.41**

Supplemental Note: \$63.67 on overtime

Engineer - Building Work Oilers II

Oilers on Crawler Cranes, Backhoes, Trenching Machines, Gunite Machines, Compressors (three or more in Battery).

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$41.16**
Supplemental Benefit Rate per Hour: **\$35.41**
Supplemental Note: \$63.67 on overtime

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.
Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Shift Rates

Off Shift: double time the regular hourly rate.

(Local #15)

ENGINEER - CITY SURVEYOR AND CONSULTANT

Party Chief

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$38.18**
Supplemental Benefit Rate per Hour: **\$20.15**
Supplemental Note: Overtime Benefit Rate - \$27.65 per hour (time & one half) \$35.15 per hour (double time).

Instrument Person

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$31.47**
Supplemental Benefit Rate per Hour: **\$20.15**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: Overtime Benefit Rate - \$27.65 per hour (time & one half) \$35.15 per hour (double time).

Rodperson

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$27.24**

Supplemental Benefit Rate per Hour: **\$20.15**

Supplemental Note: Overtime Benefit Rate - \$27.65 per hour (time & one half) \$35.15 per hour (double time).

Overtime Description

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (BUILDING CONSTRUCTION)
(Construction of Building Projects, Concrete Superstructures, etc.)

Field Engineer - BC Party Chief

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$60.10**

Supplemental Benefit Rate per Hour: **\$32.15**

Supplemental Note: Overtime Benefit Rate - \$44.90 per hour (time & one half) \$57.65 per hour (double time).

Field Engineer - BC Instrument Person

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.69**

Supplemental Benefit Rate per Hour: **\$32.15**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: Overtime Benefit Rate - \$44.90 per hour (time & one half) \$57.65 per hour (double time).

Field Engineer - BC Rodperson

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$30.20

Supplemental Benefit Rate per Hour: \$32.15

Supplemental Note: Overtime Benefit Rate - \$44.90 per hour (time & one half) \$57.65 per hour (double time).

Overtime Description

Time and one half the regular rate after a 7 hour work and time and one half the regular rate for Saturday for the first seven hours worked, Double time the regular time rate for Saturday for work performed in excess of seven hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (HEAVY CONSTRUCTION)

(Construction of Roads, Tunnels, Bridges, Sewers, Building Foundations, Engineering Structures etc.)

Field Engineer - HC Party Chief

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$70.25

Supplemental Benefit Rate per Hour: \$34.18

Supplemental Note: Overtime benefit rate - \$47.82 per hour (time & one half), \$61.46 per hour (double time).

Field Engineer - HC Instrument Person

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$51.64

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$34.18**

Supplemental Note: Overtime benefit rate - \$47.82 per hour (time & one half), \$61.46 per hour (double time).

Field Engineer - HC Rodperson

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$43.37**

Supplemental Benefit Rate per Hour: **\$34.18**

Supplemental Note: Overtime benefit rate - \$47.82 per hour (time & one half), \$61.46 per hour (double time).

Overtime Description

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (STEEL ERECTION)

Field Engineer - Steel Erection Party Chief

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$63.64**

Supplemental Benefit Rate per Hour: **\$33.04**

Supplemental Note: Overtime benefit rate - \$46.11 per hour (time & one half), \$59.18 per hour (double time).

Field Engineer - Steel Erection Instrument Person

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$49.59**

Supplemental Benefit Rate per Hour: **\$33.04**

Supplemental Note: Overtime benefit rate - \$46.11 per hour (time & one half), \$59.18 per hour (double time).

Field Engineer - Steel Erection Rodperson

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$33.20**

Supplemental Benefit Rate per Hour: **\$33.04**

Supplemental Note: Overtime benefit rate - \$46.11 per hour (time & one half), \$59.18 per hour (double time).

Overtime Description

Time and one half the regular rate for Saturday for the first eight hours worked.

Double time the regular rate for Saturday for work performed in excess of eight hours.

Overtime

Time and one half the regular rate after an 8 hour day.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - OPERATING

Operating Engineer - Road & Heavy Construction I

Back Filling Machines, Cranes, Mucking Machines and Dual Drum Paver.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$76.60**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$122.56**

Operating Engineer - Road & Heavy Construction II

Backhoes, Power Shovels, Hydraulic Clam Shells, Steel Erection, Moles and machines of a similar nature.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$79.28**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$126.85**

Operating Engineer - Road & Heavy Construction III

Mine Hoists, Cranes, etc. (Used as Mine Hoists)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$81.80**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$130.88**

Operating Engineer - Road & Heavy Construction IV

Gradealls, Keystones, Cranes on land or water (with digging buckets), Bridge Cranes, Vermeer Cutter and machines of a similar nature, Trenching Machines.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$79.85**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$127.76**

Operating Engineer - Road & Heavy Construction V

Pile Drivers & Rigs (employing Dock Builder foreperson): Derrick Boats, Tunnel Shovels.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$78.29**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$125.26**

Operating Engineer - Road & Heavy Construction VI

Mixers (Concrete with loading attachment), Concrete Pavers, Cableways, Land Derricks, Power Houses (Low Air Pressure Units).

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$74.42**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$119.07**

Operating Engineer - Road & Heavy Construction VII

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Barrier Movers , Barrier Transport and Machines of a Similar Nature.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$60.22**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$96.35**

Operating Engineer - Road & Heavy Construction VIII

Utility Compressors

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.88**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$58.92**

Operating Engineer - Road & Heavy Construction IX

Horizontal Boring Rig

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$70.79**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$113.26**

Operating Engineer - Road & Heavy Construction X

Elevators (manually operated as personnel hoist).

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$65.12**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$104.19**

Operating Engineer - Road & Heavy Construction XI

Compressors (Portable 3 or more in battery), Driving of Truck Mounted Compressors, Well-point Pumps, Tugger Machines Well Point Pumps, Churn Drill.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$50.73**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$81.17**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Operating Engineer - Road & Heavy Construction XII

All Drills and Machines of a similar nature.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$75.19**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$120.30**

Operating Engineer - Road & Heavy Construction XIII

Concrete Pumps, Concrete Plant, Stone Crushers, Double Drum Hoist, Power Houses (other than above).

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$72.84**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$116.54**

Operating Engineer - Road & Heavy Construction XIV

Concrete Mixer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$69.67**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$111.47**

Operating Engineer - Road & Heavy Construction XV

Compressors (Portable Single or two in Battery, not over 100 feet apart), Pumps (River Cofferdam) and Welding Machines, Push Button Machines, All Engines Irrespective of Power (Power-Pac) used to drive auxiliary equipment, Air, Hydraulic, etc.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$47.18**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$75.49**

Operating Engineer - Road & Heavy Construction XVI

Concrete Breaking Machines, Hoists (Single Drum), Load Masters, Locomotives (over ten tons) and Dinkies over ten tons, Hydraulic Crane-Second Engineer.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$66.56**

Supplemental Benefit Rate per Hour: **\$31.10**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: \$106.50

Operating Engineer - Road & Heavy Construction XVII

On-Site concrete plant engineer, On-site Asphalt Plant Engineer, and Vibratory console.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$67.07
Supplemental Benefit Rate per Hour: \$31.10
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: \$107.31

Operating Engineer - Road & Heavy Construction XVIII

Tower Crane

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$95.98
Supplemental Benefit Rate per Hour: \$31.10
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: \$153.57

Operating Engineer - Paving I

Asphalt Spreaders, Autogrades (C.M.I.), Roto/Mil

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$74.42
Supplemental Benefit Rate per Hour: \$31.10
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: \$119.07

Operating Engineer - Paving II

Asphalt Roller

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$72.50
Supplemental Benefit Rate per Hour: \$31.10
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: \$116.00

Operating Engineer - Paving III

Asphalt Plants

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$61.43

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$98.29**

Operating Engineer - Concrete I

Cranes

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$79.50**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours

Operating Engineer - Concrete II

Compressors

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$47.54**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours

Operating Engineer - Concrete III

Micro-traps (Negative Air Machines), Vac-All Remediation System.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$63.66**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours

Operating Engineer - Steel Erection I

Three Drum Derricks

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$82.23**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$131.57**

Operating Engineer - Steel Erection II

Cranes, 2 Drum Derricks, Hydraulic Cranes, Fork Lifts and Boom Trucks.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$79.04**
Supplemental Benefit Rate per Hour: **\$31.10**
Supplemental Note: \$56.50 overtime hours
Shift Wage Rate: **\$126.46**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Operating Engineer - Steel Erection III

Compressors, Welding Machines.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$47.14**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$75.42**

Operating Engineer - Steel Erection IV

Compressors - Not Combined with Welding Machine.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$44.91**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Shift Wage Rate: **\$71.86**

Operating Engineer - Building Work I

Forklifts, Plaster (Platform machine), Plaster Bucket, Concrete Pump and all other equipment used for hoisting material.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$62.87**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Operating Engineer - Building Work II

Compressors, Welding Machines (Cutting Concrete-Tank Work), Paint Spraying, Sandblasting, Pumps (with the exclusion of Concrete Pumps), All Engines irrespective of Power (Power-Pac) used to drive Auxiliary Equipment, Air, Hydraulic, Jacking System, etc.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$47.01**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Operating Engineer - Building Work III

Double Drum

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$71.60**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Operating Engineer - Building Work IV

Stone Derrick, Cranes, Hydraulic Cranes Boom Trucks.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$75.87**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Operating Engineer - Building Work V

Dismantling and Erection of Cranes, Relief Engineer.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$69.88**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Operating Engineer - Building Work VI

4 Pole Hoist, Single Drum Hoists.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$69.14**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

Operating Engineer - Building Work VII

Rack & Pinion and House Cars

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$54.92**

Supplemental Benefit Rate per Hour: **\$31.10**

Supplemental Note: \$56.50 overtime hours

For New House Car projects Wage Rate per Hour \$43.77

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

For House Cars and Rack & Pinion only: Overtime paid at time and one-half for all hours in excess of eight hours in a day, Saturday, Sunday and Holidays worked.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paid Holidays

- New Year's Day
- Lincoln's Birthday
- President's Day
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Veteran's Day
- Thanksgiving Day
- Day after Thanksgiving
- Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Shift Rates

For Steel Erection Only: Shifts may be worked at the single time rate at other than the regular working hours (8:00 A.M. to 4:30 P.M.) on the following work ONLY: Heavy construction jobs on work below the street level, over railroad tracks and on building jobs.

(Operating Engineer Local #14)

FLOOR COVERER

(Interior vinyl composition tile, sheath vinyl linoleum and wood parquet tile including site preparation and synthetic turf not including site preparation)

Floor Coverer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$50.50

Supplemental Benefit Rate per Hour: \$45.88

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

- New Year's Day
- President's Day
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Presidential Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.
1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Two shifts may be utilized with the first shift working 8:00 A.M. to the end of the shift at the straight time of pay. The second shift will receive one hour at double time rate for the last hour of the shift. (eight for seven, nine for eight).

(Carpenters District Council)

GLAZIER

(New Construction, Remodeling, and Alteration)

Glazier

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$44.70**

Supplemental Benefit Rate per Hour: **\$40.99**

Supplemental Note: Supplemental Benefit Overtime Rate: \$50.09

Overtime Description

An optional 8th hour can be worked at straight time rate. If 9th hour is worked, then both hours or more (8th & 9th or more) will be at the double time rate of pay.

Overtime

Double time the regular rate after a 7 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paid Holidays

None

Shift Rates

Shifts shall be any 7 hours beyond 4:00 P.M. for which the glazier shall receive 8 hours pay for 7 hours worked.

(Local #1281)

GLAZIER - REPAIR & MAINTENANCE

(For the Installation of Glass - All repair and maintenance work on a particular building, whenever performed, where the total cumulative contract value is under \$127,628. Except where enumerated (i.e. plate glass windows) does not apply to non-residential buildings.)

Craft Jurisdiction for repair, maintenance and fabrication

Plate glass replacement, Residential glass replacement, Residential mirrors and shower doors, Storm windows and storm doors, Residential replacement windows, Herculite door repairs, Door closer repairs, Retrofit apartment house (non commercial buildings), Glass tinting.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$24.13**

Supplemental Benefit Rate per Hour: **\$21.12**

Overtime

Time and one half the regular rate after an 8 hour day.

Double time the regular rate for Sunday.

Time and one half the regular hourly rate after 40 hours in any work week.

Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

(Local #1281)

HEAT AND FROST INSULATOR

Heat & Frost Insulator

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$58.38

Supplemental Benefit Rate per Hour: \$39.46

Overtime Description

Double time shall be paid for supplemental benefits during overtime work.
8th hour paid at time and one half.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Triple time the regular rate for work on the following holiday(s).

Labor Day

Paid Holidays

None

Shift Rates

The first shift shall work seven hours at the regular straight time rate. The second and third shift shall work seven hours the regular straight time hourly rate plus a fourteen percent wage and benefit premium.

Off hour work in occupied or retail buildings may be worked on weekdays with an increment of \$1.00 per hour and eight hours pay for seven (7) hours worked. Double time will apply for over seven (7) hours worked on weekdays, weekends or holidays.

(Local #12) (BCA)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

**HOUSE WRECKER
(TOTAL DEMOLITION)**

House Wrecker - Tier A

On all work sites the first, second, eleventh and every third House Wrecker thereafter will be Tier A House Wreckers (i.e. 1st, 2nd, 11th, 14th etc). Other House Wreckers may be Tier B House Wreckers.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$36.33**

Supplemental Benefit Rate per Hour: **\$29.22**

House Wrecker - Tier B

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$25.56**

Supplemental Benefit Rate per Hour: **\$21.63**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Mason Tenders District Council)

IRON WORKER - ORNAMENTAL

Iron Worker - Ornamental

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$44.20**

Supplemental Benefit Rate per Hour: **\$51.57**

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Overtime Description

Time and one half the regular rate after a 7 hour day for a maximum of two hours on any regular work day (the 8th and 9th hour) and double time shall be paid for all work on a regular work day thereafter, time and one half the regular rate for Saturday for the first seven hours of work and double time shall be paid for all work on a Saturday thereafter.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

For off shift work - 8 hours pay for 7 hours of work. When two or three shifts are employed on a job, Monday through Friday, the workday for each shift shall be seven hours and paid for ten and one-half hours at the single time rate. When two or three shifts are worked on Saturday, Sunday or holidays, each shift shall be seven hours and paid fifteen and three-quarters hours.

(Local #580)

IRON WORKER - STRUCTURAL

Iron Worker - Structural

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$50.05**

Supplemental Benefit Rate per Hour: **\$72.53**

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Overtime Description

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Monday through Friday- the first eight hours are paid at straight time, the 9th and 10th hours are paid at time and one-half the regular rate, all additional weekday overtime is paid at double the regular rate. Saturdays- the first eight hours are paid at time and one-half the regular rate, double time thereafter. Sunday-all shifts are paid at double time.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.
1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Monday through Friday - First Shift: First eight hours are paid at straight time, the 9th & 10th hours are paid at time and a half, double time paid thereafter. Second and third Shifts: First eight hours are paid at time and one-half, double time thereafter. Saturdays: All shifts, first eight hours paid at time and one-half, double time thereafter: Sunday all shifts are paid at double time.

(Local #40 & #361)

LABORER

(Foundation, Concrete, Excavating, Street Pipe Layer and Common)

Laborer

Excavation and foundation work for buildings, heavy construction, engineering work, and hazardous waste removal in connection with the above work. Landscaping tasks in connection with heavy construction work, engineering work and building projects. Projects include, but are not limited to pollution plants, sewers, parks, subways, bridges, highways, etc.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$41.50

Supplemental Benefit Rate per Hour: \$40.63

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

Labor Day
Thanksgiving Day

Shift Rates

When two shifts are employed, single time rate shall be paid for each shift. When three shifts are found necessary, each shift shall work seven and one half hours (7 ½), but shall be paid for eight (8) hours of labor, and be permitted one half hour for lunch.

(Local #731)

LANDSCAPING

(Landscaping tasks, as well as tree pruning, tree removing, spraying and maintenance in connection with the planting of street trees and the planting of trees in city parks but not when such activities are performed as part of, or in connection with, other construction or reconstruction projects.)

Landscaper (Above 6 years experience)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$28.75**
Supplemental Benefit Rate per Hour: **\$15.55**

Landscaper (3 - 6 years experience)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$27.75**
Supplemental Benefit Rate per Hour: **\$15.55**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Landscaper (up to 3 years experience)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$25.25
Supplemental Benefit Rate per Hour: \$15.55

Groundperson

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$25.25
Supplemental Benefit Rate per Hour: \$15.55

Tree Remover / Pruner

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$33.75
Supplemental Benefit Rate per Hour: \$15.55

Landscaper Sprayer (Pesticide Applicator)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$23.75
Supplemental Benefit Rate per Hour: \$15.55

Watering - Plant Maintainer

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$18.72
Supplemental Benefit Rate per Hour: \$15.55

Overtime Description

For all overtime work performed, supplemental benefits shall include an additional seventy-five (\$0.75) cents per hour.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Work performed on a 4pm to 12am shift has a 15% differential. Work performed on a 12am to 8am shift has a 20% differential.

(Local #175)

MARBLE MECHANIC

Marble Setter

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$52.74**

Supplemental Benefit Rate per Hour: **\$38.67**

Marble Finisher

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$41.46**

Supplemental Benefit Rate per Hour: **\$36.64**

Marble Polisher

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$37.93**

Supplemental Benefit Rate per Hour: **\$28.33**

Overtime Description

Supplemental Benefit contributions are to be made at the applicable overtime rates. Time and one half the regular rate after a 7 hour day or time and one half the regular rate after an 8 hour day - chosen by Employer at the start of the project and then would last for the full duration of the project.

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Christmas Day

Paid Holidays

None

(Local #7)

MASON TENDER

Mason Tender

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$37.90**

Supplemental Benefit Rate per Hour: **\$30.59**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

The Employer may work two (2) shifts with the first shift at the straight time wage rate and the second shift receiving eight (8) hours paid for seven (7) hours work at the straight time wage rate.

(Local #79)

MASON TENDER (INTERIOR DEMOLITION WORKER)

Mason Tender Tier A

Tier A Interior Demolition Worker performs all burning, chopping, and other technically skilled tasks related to interior demolition work.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$36.19**

Supplemental Benefit Rate per Hour: **\$24.25**

Mason Tender Tier B

Tier B Interior Demolition Worker performs manual work and work incidental to demolition work, such as loading and carting of debris from the work site to an area where it can be loaded in to bins/trucks for removal. Also performs clean-up of the site when demolition is completed.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$25.38**

Supplemental Benefit Rate per Hour: **\$18.57**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Local #79)

METALLIC LATHER

Metallic Lather

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$46.28**

Supplemental Benefit Rate per Hour: **\$42.92**

Supplemental Note: Supplemental benefits for overtime are paid at the appropriate overtime rate.

Overtime Description

Overtime would be time and one half the regular rate after a seven (7) or eight (8) hours workday, which would be set at the start of the job.

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

There will be no shift differential paid on the first shift if more than one shift is employed. The shift differential will remain \$12/hour on the second and third shift for the first eight (8) hours if worked. There will be no pyramiding on overtime worked on second and third shifts. The time and one half (1.5x) rate will be against the base wage rate, not the shift differential

(Local #46)

MILLWRIGHT

Millwright

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$51.50**

Supplemental Benefit Rate per Hour: **\$52.41**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for Sunday.
Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.
1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

The first shift shall receive the straight time rate of pay. The second shift receives the straight time rate of pay plus fifteen (15%) per cent. Members of the second shift shall be allowed one half hour to eat, with this time being included in the hours of the workday established. There must be a first shift to work a second shift. All additional hours worked shall be paid at the time and one-half rate of pay plus fifteen (15%) per cent for weekday hours.

(Local #740)

MOSAIC MECHANIC

Mosaic Mechanic - Mosaic & Terrazzo Mechanic

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.86**

Supplemental Benefit Rate per Hour: **\$40.65**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$51.67 per hour.

Mosaic Mechanic - Mosaic & Terrazzo Finisher

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$45.26**

Supplemental Benefit Rate per Hour: **\$40.63**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$51.65 per hour.

Mosaic Mechanic - Machine Operator Grinder

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$45.26**

Supplemental Benefit Rate per Hour: **\$40.63**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$51.65 per hour.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Good Friday

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Local #7)

PAINTER

Painter - Brush & Roller

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$42.50**

Supplemental Benefit Rate per Hour: **\$28.62**

Supplemental Note: \$ 33.25 on overtime

Spray & Scaffold / Decorative / Sandblast

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$45.50**

Supplemental Benefit Rate per Hour: **\$28.62**

Supplemental Note: \$ 33.25 on overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

(District Council of Painters #9)

PAINTER - METAL POLISHER

METAL POLISHER

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$29.73**
Supplemental Benefit Rate per Hour: **\$7.06**

METAL POLISHER - NEW CONSTRUCTION

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$30.68**
Supplemental Benefit Rate per Hour: **\$7.06**

METAL POLISHER - SCAFFOLD OVER 34 FEET

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$33.23**
Supplemental Benefit Rate per Hour: **\$7.06**

Overtime Description

All work performed on Saturdays shall be paid at time-in-a half. The exception being; for suspended scaffold work and work deemed as a construction project; an eight (8) hour shift lost during the week due to

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

circumstances beyond the control of the employer, up to a maximum of eight (8) hours per week, may be worked on Saturday at the straight time rate.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Triple time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Four Days a week at Ten (10) hours straight a day.

Local 8A-28A

PAINTER - STRIPER

Striper (paint)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$35.00**

Supplemental Benefit Rate per Hour: **\$12.37**

Supplemental Note: Overtime Supplemental Benefit rate - \$8.02; New Hire Rate (0-3 months) - \$0.00

Lineperson (thermoplastic)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$39.00**

Supplemental Benefit Rate per Hour: **\$12.37**

Supplemental Note: Overtime Supplemental Benefit rate - \$8.02; New Hire Rate (0-3 months) - \$0.00

Overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

Employees hired before April 1, 2003: 15% night shift premium differential for work commenced at 9:00 PM or later.

Vacation

Employees with one to two years service shall accrue vacation based on hours worked: 250 hours worked - 1 day vacation; 500 hours worked - 2 days vacation; 750 hours worked - 3 days vacation; 900 hours worked - 4 days vacation; 1,000 hours worked - 5 days vacation. Employees with two to five years service receive two weeks vacation. Employees with five to twenty years service receive three weeks vacation. Employees with twenty to twenty-five years service receive four weeks vacation. Employees with 25 or more years service receive five weeks vacation. Vacation must be taken during winter months. 2 Personal Days except employees hired after 4/1/12 who do not have 2 years of service.

(Local #917)

PAINTER - STRUCTURAL STEEL

Painters on Structural Steel

Effective Period: 7/1/2017 - 9/30/2017

Wage Rate per Hour: **\$49.50**

Supplemental Benefit Rate per Hour: **\$37.08**

Effective Period: 10/1/2017 - 6/30/2018

Wage Rate per Hour: **\$50.00**

Supplemental Benefit Rate per Hour: **\$38.33**

Painter - Power Tool

Effective Period: 7/1/2017 - 9/30/2017

Wage Rate per Hour: **\$55.50**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$37.08**

Overtime Wage Rate: \$6.00 above the "Painters on Structural Steel" overtime rate.

Effective Period: 10/1/2017 - 6/30/2018

Wage Rate per Hour: **\$56.00**

Supplemental Benefit Rate per Hour: **\$38.33**

Overtime Wage Rate: \$6.00 above the "Painters on Structural Steel" overtime rate.

Overtime Description

Supplemental Benefits shall be paid for each hour worked, up to forty (40) hours per week for the period of May 1st to November 15th or up to fifty (50) hours per week for the period of November 16th to April 30th.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Regular hourly rates plus a ten per cent (10%) differential

(Local #806)

PAPERHANGER

Paperhanger

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$44.89**

Supplemental Benefit Rate per Hour: **\$31.13**

Supplemental Note: Supplemental benefits are to be paid at the appropriate straight time and overtime rate.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Evening shift - 4:30 P.M. to 12:00 Midnight (regular rate of pay); any work performed before 7:00 A.M. shall be at time and one half the regular base rate of pay.

(District Council of Painters #9)

PAVER AND ROADBUILDER

Paver & Roadbuilder - Formsetter

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$45.85

Supplemental Benefit Rate per Hour: \$40.98

Paver & Roadbuilder - Laborer

Paving and road construction work, regardless of material used, including but not limited to preparation of job sites, removal of old surfaces, asphalt and/or concrete, by whatever method, including but not limited to milling; laying of concrete; laying of asphalt for temporary, patchwork, and utility paving (but not production paving); site preparation and incidental work before the installation of rubberized materials and similar surfaces; installation and repair of temporary construction fencing; slurry seal coating, maintenance of safety surfaces; play equipment installation, and other related work.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$41.98

Supplemental Benefit Rate per Hour: \$40.98

Production Paver & Roadbuilder - Screed Person

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Production paving is asphalt paving when using a paving machine or on a project where a paving machine is traditionally used)

Adjustment of paving machinery on production paving jobs.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$46.45**

Supplemental Benefit Rate per Hour: **\$40.98**

Production Paver & Roadbuilder - Raker

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$45.85**

Supplemental Benefit Rate per Hour: **\$40.98**

Production Paver & Roadbuilder - Shoveler

General laborer (except removal of surfaces - see Paver and Roadbuilder-Laborer) including but not limited to tamper, AC paint and liquid tar work.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$42.37**

Supplemental Benefit Rate per Hour: **\$40.98**

Overtime Description

If an employee works New Year's Day or Christmas Day, they receive the single time rate plus 25%.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Shift Rates

When two shifts are employed, the work period for each shift shall be a continuous eight (8) hours. When three shifts are employed, each shift will work seven and one half (7 ½) hours but will be paid for eight (8) hours since only one half (1/2) hour is allowed for meal time.

When two or more shifts are employed, single time will be paid for each shift.

Night Work - On night work, the first eight (8) hours of work will be paid for at the single time rate, except that production paving work shall be paid at 10% over the single time rate for the screed person, rakers and shovelers directly involved only. This differential is to be paid when there is only one shift and the shift works at night. All other workers will be exempt. Hours worked over eight (8) hours during said shift shall be paid for at the time and one-half rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Local #1010)

PLASTERER

Plasterer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$44.93**

Supplemental Benefit Rate per Hour: **\$25.15**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

When it is not possible to conduct alteration work during regular work hours, in a building occupied by tenants, said work shall proceed on a shift basis: however work over seven (7) hours in any twenty four (24) hour period, the time after seven (7) hours shall be considered overtime.

The second shift shall start at a time between 3:30 p.m. and 7:00 p.m. and shall consist of seven (7) working hours and shall receive eight (8) hours of wages and benefits at the straight time rate. The workers on the second shift shall be allowed one-half (½) hour to eat with this time being included in the seven (7) hours of work.

(Local #262)

PLASTERER - TENDER

Plasterer - Tender

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$37.90**

Supplemental Benefit Rate per Hour: **\$30.59**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

When work commences outside regular work hours, workers receive an hour additional (differential) wage and supplement payment. Eight hours pay for seven hours work or nine hours pay for eight hours work.

(Mason Tenders District Council)

PLUMBER

Plumber

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$67.25**

Supplemental Benefit Rate per Hour: **\$31.80**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Plumber - Temporary Services

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Temporary Services - When there are no Plumbers on the job site, there may be three shifts designed to cover the entire twenty-four hour period, including weekends if necessary, at the following rate straight time.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$53.88

Supplemental Benefit Rate per Hour: \$25.36

Overtime Description

Double time the regular rate after a 7 hour day - unless for new construction site work where the plumbing contract price is \$1.5 million or less, the hours of labor can be 8 hours per day at the employers option. On Alteration jobs when other mechanical trades at the site are working an eighth hour at straight time, then the plumber shall also work an eighth hour at straight time.

Overtime

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Shift work, when directly specified in public agency or authority documents where plumbing contract is \$8 million or less, will be permitted. 30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday. 50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)

(Mechanical Equipment and Service work shall include any repair and/or replacement of the present plumbing system.)

Plumber

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$41.20

Supplemental Benefit Rate per Hour: \$15.41

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Plumbers Local # 1)

PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$46.66

Supplemental Benefit Rate per Hour: \$22.95

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday.
50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

PLUMBER: PUMP & TANK
Oil Trades (Installation and Maintenance)

Plumber - Pump & Tank

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$64.22**

Supplemental Benefit Rate per Hour: **\$23.21**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

All work outside the regular workday (8:00 A.M. to 3:30 P.M.) is to be paid at time and one half the regular hourly rate

(Plumbers Local #1)

**POINTER, WATERPROOFER, CAULKER, SANDBLASTER,
STEAMBLASTER**
(Exterior Building Renovation)

Journey person

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$52.57**

Supplemental Benefit Rate per Hour: **\$25.80**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:30 P.M.) is to be paid at time and one half the regular rate.

(Bricklayer District Council)

ROOFER

Roofer

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$41.50**

Supplemental Benefit Rate per Hour: **\$32.27**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Second shift - Regular hourly rate plus a 10% differential. Third shift - Regular hourly rate plus a 15% differential.

(Local #8)

SHEET METAL WORKER

Sheet Metal Worker

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$48.90**

Supplemental Benefit Rate per Hour: **\$48.00**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Sheet Metal Worker - Fan Maintenance

(The temporary operation of fans or blowers in new or existing buildings for heating and/or ventilation, and/or air conditioning prior to the completion of the project.)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$39.12
Supplemental Benefit Rate per Hour: \$48.00

Sheet Metal Worker - Duct Cleaner

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$12.90
Supplemental Benefit Rate per Hour: \$8.07

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Work that can only be performed outside regular working hours (eight hours of work between 7:30 A.M. and 3:30 P.M.) - First shift (work between 3:30 P.M. and 11:30 P.M.) - 10% differential above the established hourly rate.
Second shift (work between 11:30 P.M. and 7:30 A.M.) - 15% differential above the established hourly rate.

For Fan Maintenance: On all full shifts of fan maintenance work the straight time hourly rate of pay will be paid for each shift, including nights, Saturdays, Sundays, and holidays.

(Local #28)

**SHEET METAL WORKER - SPECIALTY
(Decking & Siding)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Sheet Metal Specialty Worker

The first worker to perform this work must be paid at the rate of the Sheet Metal Worker. The second and third workers shall be paid the Specialty Worker Rate. The ratio of One Sheet Metal Worker, then Two Specialty Workers shall be utilized thereafter.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$44.57

Supplemental Benefit Rate per Hour: \$25.02

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Local #28)

SHIPYARD WORKER

Shipyard Mechanic - First Class

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$28.12

Supplemental Benefit Rate per Hour: \$3.03

Shipyard Mechanic - Second Class

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$23.35**
Supplemental Benefit Rate per Hour: **\$2.85**

Shipyard Laborer - First Class

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$20.96**
Supplemental Benefit Rate per Hour: **\$2.76**

Shipyard Laborer - Second Class

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$15.24**
Supplemental Benefit Rate per Hour: **\$2.54**

Shipyard Dockhand - First Class

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$22.89**
Supplemental Benefit Rate per Hour: **\$2.83**

Shipyard Dockhand - Second Class

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$16.51**
Supplemental Benefit Rate per Hour: **\$2.58**

Overtime Description

Work performed on holiday is paid double time the regular hourly wage rate plus holiday pay.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular hourly rate after 40 hours in any work week.

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Based on Survey Data

SIGN ERECTOR

(Sheet Metal, Plastic, Electric, and Neon)

Sign Erector

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$47.67**

Supplemental Benefit Rate per Hour: **\$50.67**

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Time and one half the regular hourly rate is to be paid for all hours worked outside the regular workday either (7:00 A.M. through 2:30 P.M.) or (8:00 A.M. through 3:30 P.M.)

(Local #137)

STEAMFITTER

Steamfitter I

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$55.50**

Supplemental Benefit Rate per Hour: **\$55.29**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: Overtime supplemental benefit rate: \$109.84

Steamfitter -Temporary Services

The steamfitters shall not do any other work and shall not be permitted to work more than one shift in a twenty-four hour day. When steamfitters are present during the regular working day, no temporary services steamfitter will be required

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$42.18**

Supplemental Benefit Rate per Hour: **\$44.84**

Overtime

Double time the regular rate after a 7 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

Work performed between 3:30 P.M. and 7:00 A.M. and on Saturdays, Sundays and Holidays shall be at double time the regular hourly rate and paid at the overtime supplemental benefit rate above.

Steamfitter II

For heating, ventilation, air conditioning and mechanical public works contracts with a dollar value not to exceed \$15,000,000 and for fire protection/sprinkler public works contracts not to exceed \$1,500,000.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$55.50**

Supplemental Benefit Rate per Hour: **\$55.29**

Supplemental Note: Overtime supplemental benefit rate: \$109.84

Steamfitter -Temporary Services

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

The steamfitters shall not do any other work and shall not be permitted to work more than one shift in a twenty-four hour day. When steamfitters are present during the regular working day, no temporary services steamfitter will be required.

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$42.18

Supplemental Benefit Rate per Hour: \$44.84

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

May be performed outside of the regular workday except Saturday, Sunday and Holidays. A shift shall consist of eight working hours. All work performed in excess of eight hours shall be paid at double time. No shift shall commence after 7:00 P.M. on Friday or 7:00 P.M. the day before holidays. All work performed after 12:01 A.M. Saturday or 12:01 A.M. the day before a Holiday will be paid at double time. When shift work is performed the wage rate for regular time worked is a thirty percent premium together with fringe benefits.

On Transit Authority projects, where work is performed in the vicinity of tracks all shift work on weekends and holidays may be performed at the regular shift rates.

Local #638

STEAMFITTER - REFRIGERATION AND AIR CONDITIONER (Maintenance and Installation Service Person)

Refrigeration and Air Conditioner Mechanic

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$39.50
Supplemental Benefit Rate per Hour: \$15.81

Refrigeration and Air Conditioner Service Person V

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$32.46
Supplemental Benefit Rate per Hour: \$14.16

Refrigeration and Air Conditioner Service Person IV

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$26.89
Supplemental Benefit Rate per Hour: \$12.80

Refrigeration and Air Conditioner Service Person III

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$23.08
Supplemental Benefit Rate per Hour: \$11.79

Refrigeration and Air Conditioner Service Person II

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$19.14
Supplemental Benefit Rate per Hour: \$10.85

Refrigeration and Air Conditioner Service Person I

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$14.00
Supplemental Benefit Rate per Hour: \$9.76

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Independence Day
Labor Day
Veteran's Day
Thanksgiving Day
Christmas Day

Double time and one half the regular rate for work on the following holiday(s).

Martin Luther King Jr. Day
President's Day
Memorial Day
Columbus Day

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

(Local #638B)

STONE MASON - SETTER

Stone Mason - Setter

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$53.62

Supplemental Benefit Rate per Hour: \$41.65

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

Shift Rates

For all work outside the regular workday (8:00 A.M. to 3:30 P.M. Monday through Friday), the pay shall be straight time plus a ten percent (10%) differential.

(Bricklayers District Council)

TAPER

Drywall Taper

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$47.82

Supplemental Benefit Rate per Hour: \$22.68

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

(Local #1974)

TELECOMMUNICATION WORKER **(Voice Installation Only)**

Telecommunication Worker

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$40.35**

Supplemental Benefit Rate per Hour: **\$13.19**

Supplemental Note: The above rate applies for Manhattan, Bronx, Brooklyn, Queens. \$12.64 for Staten Island only.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees have the option of observing either Martin Luther King's Birthday or the day after Thanksgiving instead of Lincoln's Birthday

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

For any workday that starts before 8A.M. or ends after 6P.M. there is a 10% differential for the applicable worker's hourly rate.

Vacation

After 6 months.....one week.
After 12 months but less than 7 years.....two weeks.
After 7 or more but less than 15 years.....three weeks.
After 15 years or more but less than 25 years.....four weeks.

(C.W.A.)

TILE FINISHER

Tile Finisher

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: \$41.13
Supplemental Benefit Rate per Hour: \$31.18

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).
New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

TILE LAYER - SETTER

Tile Layer - Setter

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$53.19**

Supplemental Benefit Rate per Hour: **\$35.35**

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

TIMBERPERSON

Timberperson

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: **\$48.00**

Supplemental Benefit Rate per Hour: **\$49.16**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Time and one half the regular hourly rate after 40 hours in any work week.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Local #1536)

TUNNEL WORKER

Blasters, Mucking Machine Operators (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$62.37

Supplemental Benefit Rate per Hour: \$52.39

Tunnel Workers (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018

Wage Rate per Hour: \$60.21

Supplemental Benefit Rate per Hour: \$50.65

Top Nipper (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$59.11**
Supplemental Benefit Rate per Hour: **\$49.74**

Outside Lock Tender, Outside Gauge Tender, Muck Lock Tender (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$58.04**
Supplemental Benefit Rate per Hour: **\$48.81**

Bottom Bell & Top Bell Signal Person: Shaft Person (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$58.04**
Supplemental Benefit Rate per Hour: **\$48.81**

Changehouse Attendant: Powder Watchperson (Compressed Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$50.87**
Supplemental Benefit Rate per Hour: **\$46.11**

Blasters (Free Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$59.52**
Supplemental Benefit Rate per Hour: **\$50.03**

Tunnel Workers (Free Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$56.97**
Supplemental Benefit Rate per Hour: **\$47.89**

All Others (Free Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$52.63**
Supplemental Benefit Rate per Hour: **\$44.29**

Microtunneling (Free Air Rates)

Effective Period: 7/1/2017 - 6/30/2018
Wage Rate per Hour: **\$45.58**
Supplemental Benefit Rate per Hour: **\$38.31**

Overtime Description

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

For Repair-Maintenance Work on Existing Equipment and Facilities - Time and one half the regular rate after a 7 hour day, or for Saturday, or for Sunday. Double time the regular rate for work on a holiday.
For Small-Bore Micro Tunneling Machines - Time and one-half the regular rate shall be paid for all overtime.

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.
Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Veteran's Day
Thanksgiving Day
Christmas Day

(Local #147)

WELDER

TO BE PAID AT THE RATE OF THE JOURNEYPERSON IN THE TRADE
PERFORMING THE WORK.

THIS PAGE INTENTIONALLY LEFT BLANK



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Issue Date - June 01, 2013
Revised - January 15, 2015

**DDC STANDARD GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS**



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Issue Date - June 01, 2013
Revised - January 15, 2015

No Text



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Issue Date - June 01, 2013
Revised - January 15, 2015

**DIVISION 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
TABLE OF CONTENTS**

SECTION NO.	SECTION TITLE
01 10 00	SUMMARY
01 31 00	PROJECT MANAGEMENT AND COORDINATION
01 32 00	CONSTRUCTION PROGRESS DOCUMENTATION
01 32 33	PHOTOGRAPHIC DOCUMENTATION
01 33 00	SUBMITTAL PROCEDURES
01 35 03	GENERAL MECHANICAL REQUIREMENTS
01 35 06	GENERAL ELECTRICAL REQUIREMENTS
01 35 26	SAFETY REQUIREMENTS PROCEDURES
01 35 91	HISTORIC TREATMENT PROCEDURES
01 40 00	QUALITY REQUIREMENTS
01 42 00	REFERENCES
01 50 00	TEMPORARY FACILITIES, SERVICES AND CONTROLS
01 54 11	TEMPORARY ELEVATORS AND HOISTS
01 54 23	TEMPORARY SCAFFOLDING AND PLATFORMS
01 73 00	EXECUTION
01 74 19	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
01 77 00	CLOSEOUT PROCEDURES
01 78 39	CONTRACT RECORD DOCUMENTS
01 79 00	DEMONSTRATION AND OWNERS PRE-ACCEPTANCE ORIENTATION
01 81 13	SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
01 81 13.13	VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS
01 81 19	INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
01 91 13	GENERAL COMMISSIONING REQUIREMENTS



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Issue Date - June 01, 2013
Revised - January 15, 2015

NO TEXT

SECTION 01 10 00
SUMMARY

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Addendum to the General Conditions: These General Conditions include and are supplemented by the Addendum to the General Conditions (the "Addendum"). The Addendum includes the following: (1) schedules referred to in these General Conditions (Schedule A through F), (2) information regarding the applicability of various articles, and (3) amended articles, if any.

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Scope and Intent
 - 2. Provisions Referenced in the Contract
 - 3. Performance of Work During Non-Regular Work Hours (Pursuant to a Change Order)
 - 4. Interruption of Services at Existing Facilities

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SCOPE AND INTENT:

- A. Description of Project: Refer to the Addendum for a description of the project.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 B

- B. LEED: The City of New York will seek U.S. Green Building Council (USGBC) LEED (Leadership in Energy and Environmental Design) certification for this Project as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS" and the Addendum to the General Conditions.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 C

- C. **COMMISSIONING:** The project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, **GENERAL COMMISSIONING REQUIREMENTS**, and the Addendum to the General Conditions. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.
- D. **PROGRESS SCHEDULE:** Refer to Section 01 32 00 **CONSTRUCTION PROGRESS DOCUMENTATION** for requirements of the project.
- E. **COMPLETION OF WORK:** Work to be done under the Contract is comprised of the furnishing of all labor, materials, equipment and other appurtenances, and obtaining all regulatory agency approvals necessary and required to complete the construction work in accordance with the Contract.
- F. **OMISSION OF DETAILS:** All work called for in the Specifications applicable to the Contract but not shown on the Contract Drawings in their present form, or vice versa, is required, and shall be performed by the Contractor as though it were originally delineated or described. The cost of such work shall be deemed included in the total Contract Price.
- G. **WORK NOT IN SPECIFICATIONS OR CONTRACT DRAWINGS:** Work not particularly specified in the Specifications nor detailed on the Contract Drawings but involved in carrying out their intent or in the complete and proper execution of the work, is required, and shall be performed by the Contractor. The cost of such work shall be deemed included in the total Contract Price.
- H. **SILENCE OF THE SPECIFICATIONS:** The apparent silence of the Specifications as to any detail, or the apparent omission from them of a detailed description concerning any work to be done and materials to be furnished, shall be regarded as meaning that only the best practice is to prevail and that only the best material and workmanship is to be used and interpretation of the Specifications shall be made upon that basis.
- I. **CONFLICT BETWEEN CONTRACT DRAWINGS AND SPECIFICATIONS:** Should any conflict occur in or between the Drawings and Specifications, the Contractor shall be deemed to have estimated the most expensive way of doing the work unless the Contractor shall have asked for and obtained a decision in writing from the Commissioner before the submission of the bid as to what shall govern.

1.5 CONTRACT DRAWINGS AND SPECIFICATIONS:

- A. **SCHEDULE C -** The Contract Drawings are listed in Schedule C, which is set forth in the Addendum. Such drawings referred to in the Contract, and in the applicable Specifications for the Contract, bear the general title:

City of New York
Department of Design and Construction
Division of Public Buildings
- B. **DOCUMENTS FURNISHED TO THE CONTRACTOR -** After the award of the Contract, the Contractor will be furnished with five (5) complete sets of paper prints of all Contract Drawings mentioned in Paragraph A above, as well as a copy of the Specifications.
- C. **ADDITIONAL COPIES** of Drawings and Specifications, when requested, will be furnished to the Contractor if available.



- D. **SUPPLEMENTARY DRAWINGS** - When, in the opinion of the Commissioner, it becomes necessary to more fully explain the work to be done, or to illustrate the work further, or to show any changes which may be required, drawings known as Supplementary Drawings will be prepared by the Commissioner.
- E. **COMPENSATION** - Where Supplementary Drawings entail extra work, compensation therefore to the Contractor shall be subject to the terms of the Contract. The Supplementary Drawings shall be binding upon the Contractor with the same force as the Contract Drawings.
- F. **SUPPLEMENTARY DRAWING PRINTS** - Three (3) copies of prints of these Supplementary Drawings will be furnished to the Contractor.
- G. **COPIES TO SUBCONTRACTORS** - The Contractor shall furnish each of its subcontractors and material suppliers such copies of Contract Drawings, Supplementary Drawings, or copies of the Specifications as may be required for its work.

1.6 COORDINATION:

- A. **COORDINATION AND COOPERATION** - The Contractor shall consult and study the requirements of the Contract Drawings and Specifications for all required work, including all work to be performed by trade subcontractors, so that the Contractor may become acquainted with the work of the project as a whole in order to achieve the proper coordination and cooperation necessary for the efficient and timely performance of the work.
- B. **CONTRACTOR TO CHECK DRAWINGS:** - The Contractor shall verify all dimensions, quantities and details shown on the Contract Drawings, Schedules, or other data received from the Commissioner, and shall notify the Commissioner of all errors, omissions, conflicts and discrepancies found therein. Notice of such errors shall be given before the Contractor proceeds with any work. Figures shall be used in preference to scale dimensions and large-scale drawings in preference to small-scale drawings.

1.7 SHOP DRAWINGS AND RECORD DRAWINGS:

Refer to Division I Section 01 33 00 – SUBMITAL PROCEDURES and Section 01 78 39 – PROJECT RECORD DRAWINGS for requirements applicable to shop drawings and record drawings.

1.8 TEMPORARY FACILITIES, SERVICES AND CONTROLS:

Refer to Division I Section 01 50 00 – TEMPORARY FACILITIES SERVICES AND CONTROLS for the responsibilities of the Contractor.

1.9 DUST CONTROL:

The Contractor shall prepare, execute and manage a "Dust Control Plan" for the prevention of the emission of dust from construction related activities in compliance with 15 RCNY 13-01 et. seq.

1.10 PROVISIONS REFERENCED IN THE CONTRACT:

- A. **SCHEDULE A** - Various Articles of the Contract refer to requirements set forth in Schedule A of the General Conditions. Schedule A, which is included in the Addendum, sets forth (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the Contract.

- B. EXTENSION OF TIME - Applications for Extensions of Time, as indicated in Article 13 of the Contract, shall be made in accordance with the Rules of the Procurement Policy Board.
- C. PARTIAL PAYMENTS FOR MATERIALS IN ADVANCE OF THEIR INCORPORATION IN THE WORK PURSUANT TO ARTICLE 42 OF THE CONTRACT – In order to better insure the availability of materials, fixtures and equipment when needed for the work, the Commissioner may authorize partial payment for certain materials, fixtures and equipment, prior to their incorporation in the work, but only in strict accordance with, and subject to, all the terms and conditions set forth in the Specifications, unless an alternate method of payment is elsewhere provided in the Specifications for specified materials, fixtures or equipment.
1. The Contractor shall submit to the Commissioner a written request, in quadruplicate, for payment for materials purchased or to be purchased for which the Contractor needs to be paid prior to their actual incorporation in the work. The request shall be accompanied by a schedule of the types and quantities of materials, and shall state whether such materials are to be stored on or off the site.
 2. Where the materials are to be stored off the site, they shall be stored at a place other than the Contractor's premises (except with the written consent of the Commissioner) and under the conditions prescribed or approved by the Commissioner. The Contractor shall set apart and separately store at the place or places of storage all materials and shall clearly mark same "PROPERTY OF THE CITY OF NEW YORK", and further, shall not at any time move any of said materials to another off-site place of storage without the prior written consent of the Commissioner. Materials may be removed from their place of storage off the site for incorporation in the work upon approval of the Resident Engineer.
 3. Where the materials are to be stored at the site, they shall be stored at such locations as shall be designated by the Resident Engineer and only in such quantities as, in the opinion of the Resident Engineer, will not interfere with the proper performance of the work by the Contractor or by other Contractors then engaged in performing work on the site. Such materials shall not be removed from their place of storage on the site except for incorporation in the work, without the approval of the Resident Engineer.
 4. INSURANCE
 - a. STORAGE OFF-SITE – Where the materials are stored off the site and until such time as they are incorporated in the work, the Contractor shall fully insure such materials against any and all risks of destruction, damage or loss including but not limited to fire, theft, and any other casualty or happening. The policy of insurance shall be payable to the City of New York. It shall be in such terms and amounts as shall be approved by the Commissioner and shall be placed with a company duly licensed to do business in the State of New York. The Contractor shall deliver the original and one (1) copy of such policy or policies marked "Fully Paid" to the Commissioner.
 - b. STORAGE ON THE SITE – Where the materials are stored at the site, the Contractor shall furnish satisfactory evidence to the Commissioner that they are properly insured against loss, by endorsements or otherwise, under the policy or policies of insurance obtained by the Contractor to cover losses to materials owned or installed by the Contractor. The policy of insurance shall cover fire and extended coverage against windstorm, hail, explosion and riot attending a strike, civil commotion, aircraft, vehicles and smoke.
 5. All costs, charges and expenses arising out of the storage of such materials, shall be paid by the Contractor and the City hereby reserves the right to retain out of any partial or final payment made under the Contract an amount sufficient to cover such costs, charges and expenses with the understanding that the City shall have and may exercise any and all other remedies at law for the recovery of such cost, charges and expenses. There shall be no



- increase in the Contract price for such costs, charges and expenses and the Contractor shall not make any claim or demand for compensation therefore.
6. The Contractor shall pay any and all costs of handling and delivery of materials, to the place of storage and from the place of storage to the site of the work; and the City shall have the right to retain from any partial or final payment an amount sufficient to cover the cost of such handling and delivery.
 7. In the event that the whole or any part of these materials are lost, damaged or destroyed in advance of their satisfactory incorporation in the work, the Contractor, at the Contractor's own cost, shall replace such lost, damaged or destroyed materials of the same character and quality. The City will reimburse the Contractor for the cost of the replaced materials to the extent, and only to the extent, of the funds actually received by the City under the policies of insurance hereinbefore referred to. Until such time as the materials are replaced, the City will deduct from the value of the stored materials or from any other money due under the Contract, the amount paid to the Contractor for such lost, damaged or destroyed materials.
 8. Should any of the materials paid for the City hereunder be subsequently rejected or incorporated in the work in a manner or by a method not in accordance with the Contract Documents, the Contractor shall remove and replace, at Contractor's own cost, such defective or improperly incorporated material with materials complying with the Contract Documents. Until such materials are replaced, the City will deduct from the value of the stored materials or from any other money due the Contractor, the amount paid by the City for such rejected or improperly incorporated materials.
 9. Payments for the cost of materials made hereunder shall not be deemed to be an acceptance of such materials as being in accordance with the Contract Documents, and the Contractor always retains and must comply with the Contractor's duty to deliver to the site and properly incorporate in the work only materials which comply with the Contract Documents.
 10. The Contractor shall retain any and all risks in connection with the damage, destruction or loss of the materials paid for hereunder to the time of delivery of the same to the site of the work and their proper incorporation in the work in accordance with the Contract Documents.
 11. The Contractor shall comply with all laws and the regulations of any governmental body or agency pertaining to the priority purchase, allocation and use of the materials.
 12. When requesting payment for such materials, the Contractor shall submit with the partial estimate duly authenticated documents of title, such as bills of sale, invoices or warehouse receipts, all in quadruplicate. The executed bills of sale shall transfer title to the materials from the Contractor to the City. (In the event that the invoices state that the material has been purchased by a subcontractor, bills of sale in quadruplicate will also be required transferring title to the materials from subcontractor to the Contractor).
 13. Where the Contractor, with the approval of the Commissioner, has purchased unusually large quantities of materials in order to assure their availability for the work, the Commissioner, at the Commissioner's option, may waive the requirements of Paragraph 12 provided the Contractor furnishes evidence in the form of an affidavit from the Contractor in quadruplicate, and such other proof as the Commissioner may require, that the Contractor is the sole owner of such materials and has purchased them free and clear of all liens and other encumbrances. In such event, the Contractor shall pay for such materials and submit proof thereof, in the same manner as provided in Paragraph 12 hereof, within seven (7) days after receipt of payment therefore from the Comptroller. Failure on the part of the Contractor to submit satisfactory evidence that all such materials have been paid for in full, shall preclude the Contractor from payments under the Contract.



- 14. The Contractor shall include in each succeeding partial estimate requisition a summary of materials stored which shall set forth the quantity and value of materials in storage, on or off the site, at the end of each preceding estimate period; the amount removed for incorporation in the work; the quantity and value of materials delivered during the current period and the total value of materials on hand for which payment thereof will be included in the current payment estimate.
- 15. Upon proof to the satisfaction of the Commissioner of the actual cost of such materials and upon submission of proper proof of title as required under Paragraph 12 or Paragraph 13 hereof, payment will be made therefore to the extent of 85%, provided however, that the cost so verified, established and approved shall not exceed the estimated cost of such materials included in the approved detailed breakdown estimate submitted in accordance with Article 41 of the Contract; if it does, the City will pay only 85% approved estimated cost.
- 16. Upon the incorporation in the work of any such materials, which have been paid for in advance of such incorporation in accordance with the foregoing provisions, payment will be made for such materials incorporated in the work pursuant to Article 42 of the Contract, less any sums paid pursuant to Paragraph 15 herein.

D. **MOBILIZATION PAYMENT** – A line item for mobilization shall be allowed on the Contractor's Detailed Bid Breakdown submitted in accordance with Article 41 of the Contract. The Mobilization Payment is intended to include the cost of required bonds, insurance coverage and/or any other expenses required for the initiation of the Contract Work. All costs for mobilization shall be deemed included in the total Contract Price. The Detailed Bid Breakdown shall reflect, and the Mobilization Payment shall be made, in accordance with the following schedule:

Contract Amount	Percent	Mobilization
Less than - \$ 50,000	x 0	= 0
\$ 50,000 - \$ 100,000	x	= \$ 6,000
\$ 100,001 - \$ 500,000	x 6	= \$ 6,000 (min) - \$ 30,000 (max)
\$ 500,000 - \$ 2,500,000	x 5	= \$ 30,000 (min) - \$ 125,000 (max)
Over - \$ 2,500,000	x 4	= \$ 125,000 (min) - \$ 300,000 (max)

The Contractor may requisition for one-half (1/2) of the Mobilization Payment upon satisfactory completion of the following:

- 1. Installation of any required field office(s).
- 2. Submission of all required insurance certificates and bonds.
- 3. Approval by the Department of Design and Construction of the coordinated progress schedule for the project and the Contractor's Shop Drawing schedule.

The remaining balance of the Mobilization Payment may be requisitioned only after 10 percent (10%) of the Contract price, exclusive of the total amount of Mobilization Payments made or to be made hereunder, shall have been approved for payment.

E. **ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING:** The Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel in Non-Road Vehicles, and the implementation of Best Available Technology (BAT), as set forth in Article 5.4 of the Contract. Such reports shall be submitted in accordance with the schedule, format, directions and procedures established by the Commissioner.

1.11 PERFORMANCE OF WORK DURING NON-REGULAR WORK HOURS:

- A. **NON-REGULAR WORK HOURS:** The Commissioner may issue a change order in accordance with Article 25 of the Contract which (1) directs the Contractor to perform the Work, or specific components thereof, during other than regular work hours (i.e., evenings, weekends and holidays), and (2) provides compensation to the Contractor for costs in connection with the performance of Work during other than regular work hours. The Commissioner may issue a change order if a delay has occurred and such delay is not the fault of the Contractor, or if the work is of such an important nature that delay in completing such work would result in serious disadvantage to the public.
- B. **PROCEDURE:** The Contractor shall (1) obtain whatever permits may be required for performance of the work during other than regular business hours, and (2) pay all necessary fees in connection with such permits. In addition, if directed by the Commissioner, the Contractor shall make immediate application to the Commissioner of the Department of Labor, State of New York, for dispensation in accordance with Subdivision 2 of Section 220 of the Labor Law.

1.12 INTERRUPTION OF SERVICES AT EXISTING FACILITIES:

- A. **EVENING AND WEEKEND WORK -** Where performance of the Work requires the temporary shutdown(s) of services, such shutdown(s) shall be made at night or on weekends or at such times that will cause no interference with the established routines and operations of the facility in question.
- 1 Where weekend or evening work is required due to unavoidable service shutdowns, such work shall be performed at no extra cost to the City. Components of the Work that must be performed during other than regular work hours are indicated in the Drawings and/or the Specifications.
- B. **INTERRUPTION OF EXISTING FACILITIES:**
- 1 The Contractor shall not interrupt any of the services of the facility nor interfere with such services in any way without the permission of the Commissioner. Such interruption or interferences shall be made as brief as possible, and only at such time stated.
 - 2 Under no circumstances shall the Contractor, its subcontractors, or its workers, be permitted to use any part of the project as a shop, without the permission of the Commissioner.
 - 3 Unnecessary noise shall be avoided at all times and necessary noise shall be reduced to a minimum.
 - 4 Toilet facilities, water and electricity must be operational at all times (i.e. 24/7). No services of the facility can be interrupted in any way without the permission of the Commissioner. Careful coordination of all work with the Resident Engineer must be done to maintain the operational level of the project personnel at the facility.
 - 5 The Contractor shall schedule the work to avoid noise interference that will affect the normal functions of the facility. In particular, construction operations producing noises that are objectionable to the functions of the facility must be scheduled at times of day or night, day of the week, or weekend, which will not interfere with personnel at the facility. Any additional cost resulting from this scheduling shall be borne by the Contractor.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

- 6 The Contractor shall arrange to work continuously, including evening and weekend hours, if required, to assure that services will be shut down only during the time actually required to make the necessary connections to the existing facility.
- 7 The Contractor shall give ample written notice in advance to the Commissioner and personnel at the facility of any required shutdown.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 10 00



SECTION 01 31 00
PROJECT MANAGEMENT AND COORDINATION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

1.2 SUMMARY:

- A. This Section includes administrative provisions for coordinating construction operations on the Project including without limitation the following.
 - 1. Coordination Drawings.
 - 2. Administrative and supervisory personnel.
 - 3. Project meetings.
 - 4. Requests for Interpretation (RFIs).
- B. This section includes the following:
 - 1. Definitions
 - 2. Coordination
 - 3. Submittals
 - 4. Administrative and Supervisory Personnel
 - 5. Project Meetings
 - 6. Requests for Interpretation (RFI's)
 - 7. Correspondence
 - 8. Contractor's Daily Reports
 - 9. Alternate and Substitute Equipment
- C. RELATED SECTIONS: include without limitation the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 3. Section 01 33 00 SUBMITTALS
 - 4. Section 01 35 26 SAFETY REQUIREMENTS
 - 5. Section 01 73 00 EXECUTION REQUIREMENTS
 - 6. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL



7. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 COORDINATION:

- A. Coordination: The Contractor shall coordinate its construction operations, including those of its subcontractors, with other entities to ensure the efficient and orderly installation of each part of the Work. The Contractor shall coordinate the various operations required by different Sections of the Specifications that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence in order to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 - 2. Coordinate installation of different components to ensure maximum accessibility for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
 - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair of all components, including mechanical and electrical.
- B. The Contractor shall prepare memoranda for distribution to its subcontractors and other involved entities, outlining special procedures required for coordination. Such memoranda shall include required notices, reports, and meeting minutes as applicable.
- C. Administrative Procedures: The Contractor shall coordinate scheduling and timing of required administrative procedures with other construction activities and activities of its subcontractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include without limitation the following:
 - 1. Preparation of Contractor's Construction Schedule.
 - 2. Installation and removal of temporary facilities and controls.
 - 3. Delivery and processing of submittals.
 - 4. Progress meetings.
 - 5. Pre-installation conferences..
 - 6. Startup and adjustment of systems.
 - 7. Project closeout activities.
- D. Conservation: The Contractor shall coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.



- E. Salvaged Items, Material and/or Equipment: The Specifications may identify certain items, materials or equipment which must be salvaged by the Contractor and handled or disposed of as directed. The Contractor shall comply with all directions in the Specifications regarding the salvaging and handling of identified items, material or equipment.

1.5 SUBMITTALS:

- A. Submit shop drawings, product data, samples etc. in compliance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Coordination Drawings: The Contractor shall prepare applicable Coordination Drawings in compliance with the requirements for Coordination Drawings in Section 01 33 00, SUBMITTAL PROCEDURES.
- C. Safety Plan in compliance with Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES.
- D. Waste Management Plan in compliance with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- E. Key Personnel Names: Within 15 days after the Notice to Proceed, the Contractor shall submit a list of key personnel assignments of the Contractor and its subcontractors, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in case of the absence of individuals assigned to Project.
 - 1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.
 - 2. In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work. Include special personnel required for coordinating all operations by its subcontractors.

1.6 PROJECT MEETINGS:

- A. General: The Resident Engineer will hold regularly scheduled construction progress meetings at the site, at which time the Contractor and appropriate subcontractors shall have their representatives present to discuss all details relative to the execution of the work. The Resident Engineer shall preside over these meetings.
 - 1. Agenda: Prior to each meeting, the Resident Engineer will consult with the Contractor and will prepare an agenda of items to be discussed. In general, after informal discussion of any item on the agenda, the Resident Engineer will summarize the discussion in a brief written statement, and the Contractor will then dictate a brief statement for the record.
 - 2. Coordination: In addition to construction progress meetings called by the Resident Engineer, the Contractor shall hold regularly scheduled meetings for the purpose of coordinating; expediting and scheduling the work in accordance with the master coordinated Job Progress Chart. The Contractor and its subcontractors, material suppliers or vendors whose presence is necessary, are required to attend. These meetings may, at the discretion of the Contractor, be held at the same place and immediately following the project meetings held by the Resident Engineer. Minutes of these meetings shall be recorded, typed and printed by the Contractor and distributed to all parties concerned.
- B. PRECONSTRUCTION KICK-OFF MEETING:
 - 1. The Resident Engineer will schedule a preconstruction kick-off meeting either at DDC's main office or at the Project site to review responsibilities and personnel assignments and clarify the



role of each participant. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.

2. Attendees: Authorized representative of the Client Agency; Design Consultant; the Contractor and its superintendents, subcontractor(s) and their superintendent(s); LEED sub-consultant and Commissioning Authority /Agent (CxA) as applicable and other concerned parties. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Contract Work.
3. Agenda: Includes without limitation the following as applicable:
 - a. Establishing construction schedule
 - b. Schedule for regular construction meetings
 - c. Phasing
 - d. Critical work sequencing and long-lead items
 - e. Designation of key personnel and their duties
 - f. Reviewing Application for Payment and Change Order Procedures
 - g. Procedures for Requests for Information (RFIs.)
 - h. Review Permits and Approval requirements
 - i. Review all recent Administrative Code reporting requirements relating to the project, (i.e. LL 77, LL86 etc.)
 - j. Procedures for testing and inspecting
 - k. Reviewing special conditions at the Project site
 - l. Distribution of the Contract Documents
 - m. Submittal procedures
 - n. Safety Procedures
 - o. LEED requirements
 - p. Commissioning Requirements
 - q. Preparation of Record Documents
 - r. Historic Treatment requirements
 - s. Use of the premises
 - t. Work restrictions
 - u. Client Agency occupancy requirements
 - v. Responsibility for temporary facilities, services and controls
 - w. Construction Waste Management and Disposal
 - x. Indoor Air Quality Management Plan
 - y. Dust Mitigation Plan
 - z. Office, work, and storage areas
 - aa. Equipment deliveries and priorities
 - bb. Security
 - cc. Progress cleaning
 - dd. Working hours



C. CONSTRUCTION PROGRESS MEETINGS:

1. The Resident Engineer will schedule and conduct construction progress meetings at bi-weekly intervals or as otherwise determined. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Work. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.
2. Attendees:
 - a. Design Consultant and applicable sub-consultants
 - b. Client Agency Representative
 - c. Representatives from the Contractor, sub-contractor(s), suppliers or other entities involved in the current progress, planning, coordination or future activities of the Work
 - d. Other appropriate DDC personnel, DDC consultants and concerned parties
3. Agenda: Includes without limitation the following:
 - a. Review the Construction Schedule and progress of the Work. Determine if the Work is on time, ahead of schedule or behind schedule. Determine actions to be taken to maintain or accelerate the schedule
 - b. Review and approve prior meeting minutes and follow up open issues
 - c. Coordinate work between each subcontractor
 - d. Sequence of Operations
 - e. Status of submittals, deliveries and off-site fabrication
 - f. Status of inspections and approvals by governing agencies
 - g. Temporary facilities and controls
 - h. Review Site Safety
 - i. Quality and work standards
 - j. Field observations
 - k. Status of correction of deficient items
 - l. RFI's
 - m. Pending changes
 - n. Status of outstanding Payments and Change Orders
 - o. LEED requirements including Construction Waste Management, Indoor Air Quality Plan, Dust Mitigation and Commissioning
 - p. Status of Administrative Code reporting requirements related to the project

1.7 REQUESTS FOR INFORMATION (RFI):

- A. Procedure: Immediately on discovery of the need for information or interpretation of the Contract Documents, and if not possible to request interpretation at Project meeting, the Contractor shall prepare and submit an RFI in the form specified by the Resident Engineer.
1. RFI shall originate with the Contractor. RFIs submitted by entities other than Contractor will be returned with no response.
 2. Coordinate and submit RFI in a prompt manner to the Resident Engineer so as to avoid delays in Contractor's work or work of its subcontractors.
 3. RFI Log: The Contractor shall prepare, maintain, and submit a tabular log of RFIs organized by the RFI number monthly to the Resident Engineer.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

4. On receipt of responses and action to the RFI, the Contractor shall update the RFI log and immediately distribute the RFI response to affected parties. Review response(s) and notify the Resident Engineer immediately if the Contractor disagrees with response(s).

1.8 CORRESPONDENCE:

Copies of all correspondence to DDC shall be sent directly to the Resident Engineer at the job site.

1.9 CONTRACTOR'S DAILY REPORTS:

The Contractor shall prepare and submit Daily Construction Progress Reports as outlined in Section 01 32 00, CONSTRUCTION PROGRESS DOCUMENTATION.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 31 00

SECTION 01 32 00
CONSTRUCTION PROGRESS DOCUMENTATION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for establishing an effective base line schedule for the project and documenting the progress of construction during performance of the Work by developing, revising as necessary, various documents including but not limited to the following:
1. Baseline Construction Schedule.
 2. Composite Schedule for entire project
 3. Recovery Composite Schedule
 4. Revised and/or updated Composite Schedule
 5. Submittals Schedule.
 6. Daily construction reports.
 7. Material location reports.
 8. Field condition reports.
 9. Special reports.
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
 2. Section 01 32 22 PHOTOGRAPHIC DOCUMENTATION
 3. Section 01 33 00 SUBMITTAL PROCEDURES
 4. Section 01 40 00 QUALITY REQUIREMENTS

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. **Baseline Construction Schedule:**
A horizontal bar chart type schedule (Microsoft Project OR similar program) listing all the activities and their duration for entire contract duration OR construction period, including logical ties and interrelations between the activities necessary for the timely and successful completion of the project. Critical path activities shall be clearly marked. The Baseline construction schedule is a preliminary schedule that must be reviewed and approved by the Resident Engineer.
- D. **Composite Schedule:**
A composite horizontal bar chart type schedule (Microsoft Project OR similar program) listing all activities to be performed by the Contractor and its subcontractors, the duration of each activity including logical ties and interrelations between activities, and the sequence of each of necessary activities for the timely and successful completion of the project within the stipulated contract duration. Critical path activities shall be clearly marked. The Composite schedule must be signed and submitted by the Contractor within thirty (30) calendar days after the date established for commencement of the Contract, unless otherwise directed. The Composite Schedule must be reviewed and approved by the Resident Engineer.
- E. **Recovery Composite Schedule:** A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order.

A Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions. In such case special attention must be given to keep the delays as minimum as possible and must establish the nature of efforts such as extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors, consultants, clients, end users and/or other concerned parties.

Such schedule must be prepared and submitted within Five (5) calendar days of request by the Resident Engineer. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.
- F. **Revised and/or Updated Composite Schedule:**

A Baseline construction schedule OR Composite Schedule OR Recovery Composite Schedule for the project that shows the actual duration of all the completed activities, including duration of and the reasons for delays, if any has occurred, AND revisions to all remaining activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined activities. Any such revisions should be shown on the row just below the approved schedule of the respective activity so that revisions can be compared.

The Revised and/or updated Composite Schedule must be reviewed and approved by the Resident Engineer.
- G. **Activity:** A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
- H. **Event:** The starting or ending point of an activity.
- I. **Fragment:** A part of the activity that breaks down activities into smaller activities for greater detail.
- J. **Milestone:** A key or critical point in time for reference or measurement.
- K. **Network Diagram:** A graphic diagram of a network schedule, showing activities and activity relationships.

PART II – PRODUCTS

2.1 BASELINE CONSTRUCTION SCHEDULE:

- A. The Contractor shall prepare a Baseline horizontal bar-chart-type construction schedule for the project. Submit the Baseline Construction Schedule to the Resident Engineer within (15) fifteen calendar days after the date established for commencement of the Contract, unless directed otherwise. The Baseline Schedule must be reviewed and approved by the Resident Engineer.
1. Provide a separate time bar for each significant construction activity. Coordinate each activity on the schedule with other construction activities for proper interrelationship & sequence.
 2. Duration: The duration of each activity on the schedule besides installation must clearly show required duration of filing for permits, inspections, testing, approvals, shop drawings and materials submittals and approvals, fabrication, delivery, phasing for each construction activity.
 3. Schedule shall be time-scaled in not more than weekly increments, with the dates of the first day (Monday) of each week indicated.
 4. Completion of all the project activities shall be indicated in advance of the date established for completion of the Contract, allowing time for required inspection and punch list work.
 5. Clearly show time bar for all the tasks, to be completed before start of physical work of scheduled activities, including but not limited to obtaining required permit, subcontractor approval, submission and approval of shop drawings, field verification, time for fabrication and delivery, testing of materials and/or samples, preparation and approval of mock-up sample, curing, pre-testing of soil, pre-testing of equipment - including start up, testing & adjusting, filing for inspection by regulatory agencies, training, final use, etc. required to maintain orderly progress of the activity. A special consideration must be given to those activities requiring early approvals because of long lead-time for manufacture or fabrication.
 6. Phasing: Arrange all activities in proper sequence to reflect requirements for phased completion, work by other entities, work by the City, City furnished items, coordination with existing work, limitations arising due to continued occupancies, non-interruptible services, partial completion for occupancy, site restrictions, provisions for future work, seasonal variations, environmental control, and similar conditions of the project.
 7. Arrange all activities and/or show interrelationship and logical sequence of all activities, determine and mark all critical path activities including any phasing reflecting actual project condition.
 8. Keep at least two blank horizontal bars between all activities for recording actual progress and submitting Revised Schedule as defined in Sub-Section 1.3 G
 9. If necessary a new revised schedule shall be prepared in the same manner as outlined above.

2.2 COMPOSITE SCHEDULE FOR THE PROJECT:

- A. The Contractor shall prepare a Composite Schedule based on the approved Baseline Schedule Such schedule shall indicate graphically and chronologically the start and completion of each and every activity, including all the pre-activity and post activity tasks. Keep at least two blank horizontal bars between all activities for recording actual progress and/or revisions.
1. If necessary the Contractor shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Composite Schedule. The Composite Schedule must be finalized and signed by the Contractor within (30) thirty calendar days after the date established for commencement of the Contract, unless directed otherwise. The Composite Schedule must be reviewed and approved by the Resident Engineer.



2.3 RECOVERY COMPOSITE SCHEDULE:

- A. A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order. A Recovery Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions, must be developed and submitted within (5) five calendar days of the request by the Resident Engineer. Such Recovery Composite Schedule shall include all information as defined in Article 1.3 F and shall be prepared in the same manner as outlined in Sub-Sections 2.1 and 2.2. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.

2.4 REVISED AND/OR UPDATED COMPOSITE SCHEDULE:

- A. The Contractor shall revise and/or update the approved Composite Schedule as directed. The Revised schedule shall be prepared in the same manner as outlined above in Sub-Sections 2.1 and 2.2.
- B. The Contractor shall mark actual progress, delays, work stoppage etc. in the row just below the approved schedule for the respective activity so that revisions can be compared.
- C. Such schedule also shall indicate graphically and chronologically any revisions to the start and completion of the remaining activities including revisions to all the pre-activity and post activity tasks for all subcontractors.
- D. If necessary, the Contractor shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Revised Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Schedule. Such schedule must be prepared and submitted by the Contractor within Five (5) calendar days of request by the Resident Engineer. The Revised Composite Schedule must be reviewed and approved by the Resident Engineer.

2.5 SUBMITTALS SCHEDULE:

- A. Preparation: The Contractor shall submit a schedule of submittals, arranged in chronological order by dates required by the construction schedule. Include time required for review, re-submittal, ordering, manufacturing, fabrication, and delivery when establishing dates.
- B. SCHEDULE F: Schedule F sets forth all submittal requirements for shop drawings and material samples. Schedule F is included in the Addendum. At the kick-off meeting, the Contractor must review this Schedule with the Resident Engineer and the Design Consultant. Within 10 days after the kick-off meeting, the Contractor must complete information on Schedule F concerning the submission date, the required delivery date and the fabrication time. For all required submittals of shop drawings and material samples, the Schedule F provided by the Contractor must indicate a submission date which is at least 20 business days prior to the date of the manufacture of the item or materials to be installed. In addition, if so directed by the Commissioner, the Schedule F provided by the Contractor must indicate a submission date for shop drawings and/or material samples of specified items or materials which is within 60 business days after the kick-off meeting. In the event of any conflict between the Specifications and Schedule F, Schedule F shall take precedence; provided, however, in the event of an omission from Schedule F (i.e., Schedule F omits either a reference to or information concerning a submittal requirement which is set forth in the Specifications), such omission from Schedule F shall have no effect and the Contractor's submittal obligation, as set forth in the Specifications, shall remain in full force and effect.
- C. Review: The Resident Engineer will review the Schedule F submitted by Contractor. Upon acceptance, the Resident Engineer will date and sign the schedule as approved and transmit it to the Consultant, Contractor and others within DDC as he/she deems appropriate.



2.6 REPORTS:

- A. Daily Construction Reports: The Contractor shall submit to the Resident Engineer written Daily Construction Reports at the end of each work day, recording basic information such as the date, day, weather conditions, and contract days passed, remaining contract duration/days and the following information concerning the Project.

Information: The reports shall be prepared by the Contractor's Superintendent and shall bear the Contractor's Superintendents signature. Each report shall contain the following information:

1. List of name of Contractor, subcontractors, their work force in each category, and details of activities performed.
2. The type of materials and/or major equipment being installed by the Contractor and/or by each subcontractor.
3. The major construction equipment being used by the Contractor and/or subcontractors.
4. Material and Equipment deliveries.
5. High and low temperatures and general weather conditions.
6. Accidents.
7. Meetings and significant decisions.
8. Unusual events.
9. Stoppages, delays, shortages, and losses.
10. Meter readings and similar recordings
11. Emergency procedures.
12. Orders and/or requests of authorities having jurisdiction.
13. Approved Change Orders received and implemented.
14. Field Orders and Directives received and implemented.
15. Services connected and disconnected.
16. Equipment or system tests and startups.
17. Partial Completions and occupancies.
18. Substantial Completions authorized.

NOTE: If there is NO ACTIVITY at site, a daily report indicating so and the reason for no activity at the site must be submitted.

- B. Material Location Reports: The contractor shall submit a Material Location Report at weekly OR monthly intervals as determined and established by the Resident Engineer. Such report shall include a comprehensive list of materials delivered to and stored at Project site. List shall be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit a Request For Information (RFI) form with a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

2.7 SPECIAL REPORTS:

- A. Accident report, incident report, special condition report for the conditions out of control of any party involved with the project effecting project progress, explaining impact on the project schedule and cost if any.

PART III – EXECUTION (Not Used)
END OF SECTION 01 32 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

No Text



SECTION 01 32 33
PHOTOGRAPHIC DOCUMENTATION

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 33

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract]

1.2 SUMMARY:

- A. This Section includes the following:
1. Photographic Media
 2. Construction Photographs
 3. Pre-construction Photographs
 4. Periodic Construction Progress Photographs
 5. Special Photographs
 6. DVD Recordings
 7. Final Completion Construction Photographs
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
 2. Section 01 33 00 SUBMITTAL PROCEDURES
 3. Section 01 35 91 HISTORIC TREATMENT PROCEDURES
 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 5. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- C. PHOTOGRAPHER - The Contractor shall employ and pay for the services of a professional photographer who shall take photographs showing the progress of the work for all Contracts.

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SUBMITTALS:

- A. Qualification Data: For photographer.



- B. Key Plan: With each Progress Photograph Submittal include a key plan of Project site and building with notation of vantage points marked for location and direction of each image. Indicate location, elevation or story of construction. Include same label information as corresponding set of photographs.
- C. Construction Progress Photograph Prints: Take Progress Photographs bi-weekly and submit four color prints of each photographic view for each trade to the Resident Engineer. Such photographs shall be included in each monthly progress report or as otherwise directed by the Resident Engineer.
- D. Construction Photograph Negatives: Submit a complete set of photographic negatives in individually protected negative sleeves with each submittal of prints. Identify negatives with label matching photographic prints.
- E. Digital Images: If Digital Media is used, submit a complete set of digital color image electronic files on CD-ROM with each submittal of prints. Identify electronic media with date photographs were taken. Submit images that have same aspect ratio as the sensor, un-cropped.

1.5 QUALITY ASSURANCE:

- A. Photographer Qualifications: An individual who has been regularly engaged as a professional photographer of construction projects for not less than three years.

1.6 COORDINATION:

- A. The Contractor and its subcontractor(s) shall cooperate with the photographer and provide auxiliary services requested, including access to Project site and use of temporary facilities, including temporary lighting required to produce clear, well-lit photographs without obscuring shadows.

1.7 COPYRIGHT:

- A. The Contractor shall include the provisions set forth below in the agreement between the Contractor and the Photographer who will provide the construction photographs described in this section. The Contractor shall submit to the Resident Engineer a copy of its agreement with the Photographer.
- B. Any photographs, images and/or other materials produced pursuant to this Agreement, and any and all drafts and/or other preliminary materials in any format related to such items produced pursuant to this Agreement, shall upon their creation become the exclusive property of the City.
- C. Any photographs, images and/or other materials provided pursuant to this Agreement ("Copyrightable Materials") shall be considered "work-made-for-hire" within the meaning and purview of Section 101 of the United States Copyright Act, 17 U.S.C. § 101, and the City shall be the copyright owner thereof and of all aspects, elements and components thereof in which copyright protection might exist. To the extent that the Copyrightable Materials do not qualify as "work-made-for-hire," the Photographer hereby irrevocably transfers, assigns and conveys exclusive copyright ownership in and to the Copyrightable Materials to the City, free and clear of any liens, claims, or other encumbrances. The Photographer shall retain no copyright or intellectual property interest in the Copyrightable Materials. The Copyrightable Materials shall be used by the Photographer for no purpose other than in the performance of this Agreement without the prior written permission of the City. The Department may grant the Photographer a license to use the Copyrightable Materials on such terms as determined by the Department and set forth in the license.
- D. The Photographer acknowledges that the City may, in its sole discretion, register copyright in the Copyrightable Materials with the United States Copyright Office or any other government agency authorized to grant copyright registrations. The Photographer shall fully cooperate in this effort, and agrees to provide any and all documentation necessary to accomplish this.



- E. The Photographer represents and warrants that the Copyrightable Materials: (i) are wholly original material not published elsewhere (except for material that is in the public domain); (ii) do not violate any copyright Law; (iii) do not constitute defamation or invasion of the right of privacy or publicity; and (iv) are not an infringement, of any kind, of the rights of any third party. To the extent that the Copyrightable Materials incorporate any non-original material, the Photographer has obtained all necessary permissions and clearances, in writing, for the use of such non-original material under this Agreement, copies of which shall be provided to the City.

PART II – PRODUCTS

2.1 PHOTOGRAPHIC MEDIA:

- A. Photographic Film: Medium format, 2-1/4 by 2-1/4 inches (60 by 60 mm).
- B. Digital Images:
1. Construction Progress Images: Color images in JPEG format with minimum sensor size of 1.3 megapixels.
 2. Presentation Quality Images: Provide Color images in uncompressed TIFF format, produced by a digital camera with minimum sensor size of 4.0 megapixels, and at an image resolution of not less than 1024 by 768 with 8"x10" original capture at 300 dpi or greater.
- C. Prints:
1. Format: 8-by-10-inch (203-by-254-mm) smooth-surface matte color prints on single-weight commercial-grade stock paper, with 1inch wide margins and punched for standard 3-ring binder.
 2. Identification: On the front of each photograph affix a label in the margin with Project name and date photograph was taken. On the back of each print, provide an applied label or rubber-stamped impression with the following information:
 - a. Project Contract I.D. Number.
 - b. Project Contract Name.
 - c. Name of Contractor. (and Subcontractor Trade Represented)
 - d. Subject of Image Taken.
 - e. Date and time photograph was taken if not date stamped by camera.
 - f. Description of vantage point, indicating location, direction and other pertinent information.
 - g. Unique sequential identifier.
 - h. Name and address of photographer.

PART III – EXECUTION

3.1 CONSTRUCTION PHOTOGRAPHS:

- A. General: Take photographs using the maximum range of depth of field, and that are in focus, to clearly show the Work. Photographs with blurry or out-of-focus areas will not be accepted.
1. Maintain key plan with each set of construction photographs that identifies each photographic location and direction of view.
- B. Film Images:
1. Date Stamp: Unless otherwise indicated, date and time stamp each photograph as it is being taken so stamp is integral to photograph.



2. Field Office Prints: Retain one set of prints of progress photographs in the field office at Project site, available at all times for reference. Identify photographs same as for those submitted to Commissioner.
- C. Digital Images: Submit digital images exactly as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
1. Date and Time: Include date and time in filename for each image.
 2. Field Office Images: Maintain one set of images on CD-ROM in the field office at Project site, available at all times for reference. Identify images same as for those submitted to Commissioner.

3.2 PRE-CONSTRUCTION & PRE-DEMOLITION PHOTOGRAPHS:

- A. Before commencement of Contract work at the site, take color photographs of Project site and surrounding properties, including existing structures or items to remain during construction, from different vantage points, as directed by the Resident Engineer.
1. Flag applicable excavation areas and construction limits before taking construction photographs.
 2. Take photographs of minimum eight (8) views to show existing conditions adjacent to property before starting the Work.
 3. Take applicable photographs of minimum eight (8) views of existing buildings either on or adjoining property to accurately record physical conditions at start of construction.
 4. Take additional photographs as required or directed by the Resident Engineer to record settlement or cracking of adjacent structures, pavements, and improvements.
- B. Demolition Operations: Take photographs as directed by the Resident Engineer of minimum of eight (8) views each before commencement of demolition operations, at mid-point of operations and at completion of operations.
- C. Pre-Demolition Photographs: Take archival quality color photographs, to include all exterior building facades, of all structures at the Project site designated to be fully demolished or removed in compliance with NYC Building Code requirements. Submit four (4) complete sets of pre-demolition photographs, in the format specified herein, to the Resident Engineer for submission to the Department of Buildings.

3.3 PERIODIC CONSTRUCTION PROGRESS PHOTOGRAPHS:

- A. Take photographs of minimum eight (8) views bi-weekly as directed by the Resident Engineer of construction progress for each contract trade. Select vantage points to show status of construction and progress since last photographs were taken.

3.4 SPECIAL PHOTOGRAPHS:

- A. The photographer shall take special photographs of subject matter or events as specified in other sections of the Project Specifications from vantage points specified or as otherwise directed by the Resident Engineer.
- B. Historical Elements: As required in Section 01 35 91, HISTORIC TREATMENT PROCEDURES, for Contract work at designated landmark structures or sites the photographer, as specified and required by individual sections of the Contract documents or at the direction of the Commissioner, shall take images of existing elements scheduled to be removed for replacement, repair or replication in quantities as directed, including post-construction photographs of completed work as directed by the Commissioner.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

1. Take Presentation Quality Photographs of designated landmark structures as directed by the Commissioner for submission to the New York City Landmarks Preservation Commission. Provide a minimum of four color photographic prints of each view as directed.

3.5 DVD RECORDING:

- A. When DVD Recording of Demonstration and Training sessions is required for Non-Commissioned projects the Contractor shall provide the services of a Videographer as indicated in Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

3.6 FINAL COMPLETION CONSTRUCTION PHOTOGRAPHS:

- A. Take color photographs of minimum eight (8) unobstructed views of the completed project or project and site, as directed by the Commissioner and after all scaffolding, hoists, shanties, field offices or other temporary work has been removed and final cleaning is done after date of Substantial Completion for submission as Project Record Documents. Submit four (4) sets of each view of Presentation Quality photographic prints including negatives and/or digital images electronic file.

END OF SECTION 01 32 33



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

No Text

SECTION 01 33 00
SUBMITTAL PROCEDURES

PART I – GENERAL:

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Coordination Drawings, Catalogue Cuts, Material Samples and other submittals required by the Contract Documents.
- B. Review of submittals does not relieve the Contractor of responsibility for any Contractor's errors or omissions in such submittals, nor from responsibility for complying with the requirements of the Contract.
- C. Responsibility of the Contractor: The approval of Shop Drawings will be general and shall not relieve the Contractor of responsibility for the accuracy of such Shop Drawings, nor for the proper fitting and construction of the work, nor of the furnishing of materials or work required by the Contract and not indicated on the Shop Drawings. Approval of Shop Drawings shall not be construed as approving departures from the Contract Drawings, Supplementary Drawings or Specifications.
- D. This Section includes the following:
1. Definitions
 2. Submission Procedures
 3. Coordination Drawings
 4. LEED Submittals
 5. Ultra Low Sulfur Diesel Fuel Reporting
 6. Construction Photographs and DVD Recordings
 7. As-Built Documents

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| D. | Section 01 32 33 | PHOTOGRAPHIC DOCUMENTATION |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |
| G. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Submittals: Written and graphic information that requires responsive actions and includes without limitation all shop drawings, product data, letters of certification, tests and other information required for quality control and as required by the Contract Documents.
- D. Informational Submittals: Written information that does not require responsive action. Submittals may be rejected for non-compliance with the Contract.
- E. Shop Drawings: Include drawings, diagrams, illustrations, schedules, performance charts, brochures, and other data, except for coordination drawings, specifically prepared for the project by the Contractor or any subcontractor, manufacturer, supplier or distributor, which illustrates how specific portions of the work shall be fabricated and/or installed.
- F. Coordination Drawings: As required in Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION.
- G. Product Data and Quality Assurance Submittals: Includes manufacturer's standard catalogs, pamphlets and other printed materials including without limitation the following:
 - 1. Catalogue and Product specifications
 - 2. Installation instructions
 - 3. Color charts
 - 4. Catalog cuts
 - 5. Rough-in diagrams and templates
 - 6. Wiring diagrams
 - 7. Performance curves
 - 8. Operational range diagrams
 - 9. Mill reports
 - 10. Design data and calculations
 - 11. Certification of compliance or conformance
 - 12. Manufacturer's instructions and field reports

1.5 COORDINATION DRAWINGS:

- A. The Contractor shall provide reproducible Coordination Drawing(s) of the reflective ceiling showing the integration of all applicable contract work, including general construction work as well as trade work (Plumbing, HVAC, and Electrical) to be performed by subcontractors. The Coordination Drawing(s) shall include, without limitation, the following information:
 - 1. General Construction work showing the reflective ceiling plan including starting points, ceiling and beam soffits elevations, ceiling heights, roof openings, etc.
 - 2. HVAC Contract work showing ductwork, heating and sprinkler piping, location of grilles, registers etc. and access doors in hung ceilings. Locations shall be fixed by elevations and dimensions from column centerlines and/or walls.
 - 3. Plumbing Contract work including piping, valves, cleanouts etc., indicating locations and elevations and shall indicate the necessary access doors.
 - 4. Electrical Contract work indicating fixtures, large conduit runs, clearances, pull boxes, junction boxes, sound system speakers, etc.
- B. The Contractor shall issue the completed Coordination Drawing(s) to the Resident Engineer for his/her review. The Resident Engineer may call as many meetings as necessary with the Contractor, including

attendance by applicable subcontractors, and may call on the services of the Design Consulting where necessary, to resolve any conflicts that become apparent.

- C. Upon resolution of any conflicts, the Contractor shall provide a final Coordination Drawing(s) which will become the Master Coordination Drawing(s). The Master Coordination Drawing(s) shall be signed and dated by the Contractor to indicate acceptance of the arrangement of the work.
- D. A reproducible copy of the Master Coordination Drawing(s) shall be provided by the Contractor to each of the appropriate subcontractor(s), the Resident Engineer and the Design Consultant for information.
- E. Shop Drawings shall not be submitted prior to acceptance of the final coordinated drawings and shall be prepared in accordance with the Master Coordination Drawing(s). No work will be permitted without accepted Shop Drawings. It is therefore essential that this procedure be instituted as quickly as possible.

1.6 SUBMITTAL PROCEDURES:

- A. Refer to Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS and Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS for additional submittal requirements involving electrical and mechanical work or equipment of any nature called for the project.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activities, with the Submittal Schedule specified in Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION.
 - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
 - 3. The Commissioner reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Submittals Schedule: The Submittals Schedule is set forth in Schedule F, which is included in the Addendum.
- D. Identification: Place a permanent label or title block on each submittal for identification.
 - 1. Indicate name of firm or entity that prepared each submittal on label or title block.
 - 2. Provide a space approximately 6 by 8 inches on label or beside title block to record Contractor's review and approval markings and action taken by Design Consultant.
 - 3. Include the following minimum information on label for processing and recording action taken:
 - a. Project name, DDC Project Number and Contract Number
 - b. Date
 - c. Name and address of Design Consultant
 - d. Name and address of Contractor
 - e. Name and address of subcontractor
 - f. Name and address of supplier
 - g. Name of manufacturer
 - h. Submittal number or other unique identifier, including revision identifier
 - i. Number and title of appropriate Specification Section
 - j. Drawing number and detail references, as appropriate
 - k. Location(s) where product is to be installed, as appropriate
 - l. Other necessary identification
- E. Transmittal:
 - 1. Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form in triplicate. Transmittals received from sources other than the



Contractor will be returned without review. Re-submission of the same drawings or product data shall bear the original number of the prior submission and the original titles.

2. Transmittal Form: Provide locations on form for the following information:

- a. Project name, DDC Project number and Contract Number
- b. Date
- c. Destination (To:)
- d. Source (From:)
- e. Names of Contractor, subcontractor, manufacturer, and supplier
- f. Category and type of submittal
- g. Submittal purpose and description
- h. Specification Section number and title
- i. Drawing number and detail references, as appropriate
- j. Transmittal number, numbered consecutively
- k. Submittal and transmittal distribution record
- l. Remarks
- m. Signature of transmitter

F. Shop Drawings:

1. Procedures for Preparing, Forwarding, Checking and Returning all Shop Drawings shall be, generally, as follows:

- a. The Contractor shall make available to its subcontractors the necessary Contract Documents and shall instruct such subcontractor to determine dimensions and conditions in the field, particularly with reference to coordination between the trade subcontractors. The Contractor shall direct its subcontractors to prepare Shop Drawings for submission to the Design Consultant in accordance with the requirements of these General Conditions. The Contractor shall also direct its subcontractors to "Ring Up" corrections made on all re-submissions for approval, so as to be readily seen, and that the symbol "sub" be used to identify the source of the correction or information that has been added.

The Contractor shall:

1. Review and be responsible to the Commissioner, for information shown on its subcontractor's Shop and Installation drawings and manufacturers' data, and also for conformity to Contract Documents.
 2. "Ring Up" corrections made on all submissions for approval, so as to be readily seen, and that the symbol "GC", "PL", "HVAC" or "EL" be used to indicate that the correction and/or information added was made by the Contractor and/or its subcontractor(s).
 3. Clearly designate which entity is to perform the work when the term, "work by others" or other similar phrases are indicated on the Contract Drawings before submission to the Design Consultant.
 4. Stamp submissions "Recommended for Acceptance", date and forward to the Design Consultant.
2. The Contractor shall promptly prepare and submit project specific layout detail and Shop Drawings of such parts of the work as are indicated in the Specifications, Schedule F of the Addendum or as required. These Shop Drawings shall be made in accordance with the Contract Drawings, Specifications and Supplementary Drawings, if any. The Shop Drawings shall be accurate and distinct and give all the dimensions required for the fabrication, erection and installation of the work.
3. Size of Drawings: The Shop Drawings, unless otherwise directed, shall be on sheets of the same size as the Contract Drawings, drawn accurately and of sufficient scale to be legible, with a one half (1/2) inch marginal space on each side and a two (2) inch marginal space for binding on the left side.



4. Scope of Drawings: Shop Drawings shall be numbered consecutively and shall accurately and distinctly represent all aspects of the work, including without limitation the following:
 - a. All working and erection dimensions
 - b. Arrangements and sectional views
 - c. Necessary details, including performance characteristics, and complete information for making necessary connections with other work
 - d. Kinds of materials including thickness and finishes
 - e. Identification of products
 - f. Fabrication and installation drawings
 - g. Roughing-in and setting diagrams
 - h. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring
 - i. Shop work manufacturing instructions
 - j. Templates and patterns
 - k. Schedules
 - l. Design calculations
 - m. Compliance with specified standards
 - n. Notation of coordination requirements
 - o. Notation of dimensions established by field measurement
 - p. Relationship to adjoining construction clearly indicated
 - q. Seal and signature of professional engineer if specified
 - r. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring
 - s. All other information necessary for the work and/or required by the Commissioner
5. Titles and Reference: Shop Drawings shall be dated and contain:
 - a. Name of the Project, DDC Project Number and Contract Number
 - b. The descriptive names of equipment, or materials covered by the Contract Drawings and the classified item number or numbers, if any, under which it is, or they are required
 - c. The locations or points and sequence at which materials, or equipment, are to be installed in the work
 - d. Cross references to the section number, detail number and paragraph number of the Contract Specifications
 - e. Cross references to the sheet number, detail number, etc., of the Contract Drawings
6. Field Measurements: In addition to the above requirements, the Shop Drawings shall be signed by the Contractor and, if applicable, the subcontractor responsible for preparation of the Shop Drawings. Each Shop Drawing shall be stamped with the following wording:

FIELD MEASUREMENTS: The Contractor certifies that it has verified and supplemented the Contract Drawings by taking all required field measurements, which said measurements correctly reflect all field conditions and that this Shop Drawing incorporates said measurements.
7. Contractor's Statement with Submittal: Any Submittal by the Contractor for acceptance, including without limitation, all dimensional drawings of equipment, blueprints, catalogues, models, samples and other data relative to the equipment, the materials, the work or any part thereof, must be accompanied by a statement that the Submittal has been examined by the Contractor and that everything shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If there is any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, the Contractor shall, in its statement, list and clearly describe each such discrepancy.

Acceptance will be given based upon the Contractor's representation that what is shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If



the Contractor's statement indicates any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, such change is subject to review and prior written acceptance by the Design Consultant. In addition, such change may require a change order in accordance with Article 25 of the Contract. In the event any such change is approved, any additional expense or increased cost in connection with the change is the sole responsibility of the Contractor.

8. Submission of Shop Drawings:

a. Initial Submission: The Contractor shall submit seven (7) copies of each Shop Drawing to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Shop Drawings to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory Shop Drawing will be stamped "No Exceptions Taken", be dated and distributed by the Design Consultant as follows:

- 1) Two (2) copies thereof will be returned to the Contractor by letter
- 2) Three (3) copies of the approved Shop Drawing and copy of the transmittal letter to the Contractor will be forwarded to DDC
- 3) One copy will be retained by the Design Consultant
- 4) One copy will be forwarded / retained by sub-consultant(s) as appropriate

Should the Shop Drawing(s) be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return the Shop Drawings to the Contractor with the necessary corrections and changes to be made as indicated thereon.

b. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each shop drawing to the Design Consultant. The Contractor shall revise and resubmit the Shop Drawing as required by the Design Consultant until the Shop Drawings are stamped "No Exceptions Taken". However, Shop Drawings which have been stamped "Make Corrections Noted" shall be considered an "Acceptable" Shop Drawing and NEED NOT be resubmitted.

c. Commencement of Work: No work or fabrication called for by the Shop Drawings shall be done until the acceptance of the said drawings by the Design Consultant is given. In addition to the foregoing Shop Drawing transmissions, a copy of any Shop Drawing prepared by any of the Contractor's subcontractors which Shop Drawing indicated work related to, adjacent to, impinging upon, or affecting work to be done by other subcontractors shall be transmitted to the subcontractors so affected. [These accepted Shop Drawings shall be distributed to the affected subcontractors when required with a copy of the transmittal to the Resident Engineer.]

d. Variations: If the Shop Drawings show variations from the Contract requirements because of standard shop practice or other reasons, the Contractor shall make specific mention of such variations in its letter of submittal. Acceptance of the Shop Drawings shall constitute acceptance of the subject matter thereof only and not of any structural apparatus shown or indicated.

G. Product Data:

1. General: Except as otherwise prescribed herein, the submission, review and acceptance of Product Data and Catalogue cuts shall conform to the procedures specified in Sub-Section 1.6 F, Shop Drawings.
2. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
3. Mark each copy of each submittal to show which products and options are applicable.
4. Include the following information, as applicable:



- a. Manufacturer's written recommendations.
 - b. Manufacturer's product specifications.
 - c. Manufacturer's installation instructions.
 - d. Standard color charts.
 - e. Manufacturer's catalog cuts.
 - f. Wiring diagrams showing factory-installed wiring.
 - g. Printed performance curves.
 - h. Operational range diagrams.
 - i. Mill reports.
 - j. Standard product operation and maintenance manuals.
 - k. Compliance with specified referenced standards.
 - l. Testing by recognized testing agency.
 - m. Application of testing agency labels and seals.
 - n. Notation of coordination requirements.
5. Submit Product Data before or concurrent with Samples.
6. Submission of Product Data:
- a. Initial Submission: The Contractor shall submit seven (7) sets of Product Data to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Product Data to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory catalogue cut will be stamped "No Exception Taken", be dated and distributed as follows:
 - 1) Two (2) copies thereof will be returned to the Contractor by letter
 - 2) Three (3) copies of the Product Data and copy of the transmittal letter to the Contractor will be forwarded to DDC
 - 3) One copy will be retained by the Design Consultant
 - 4) One copy will be forwarded / retained by sub-consultant(s) as appropriateShould the Product Data be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return one (1) set of such Product Data to the Contractor with the necessary corrections and changes to be made indicated and one (1) set to DDC.
7. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each Product Data for the review of the Design Consultant. The Contractor shall revise and resubmit the Product Data as required by the Design Consultant until the submission is stamped "No Exceptions Taken" by the Design Consultant. However, Product Data which has been stamped "Make Corrections Noted" shall be considered an "Accepted" Product Data and NEED NOT be resubmitted.
- H. Samples of Materials:
1. For samples of materials involving electrical work of any nature, refer to Section 00 35 06 - General Electrical Requirements.
 2. Samples shall be in triplicate, of sufficient size to show the quality, type, range of color, finish and texture of the material.
 3. Each of the samples shall be labeled as follows:
 - a. Name of the Project, DDC Project Number and Contract Number
 - b. Name and quality of the material
 - c. Date



- d. Name of Contractor, subcontractor, manufacturer and supplier
 - e. Related Specification or Contract Drawing reference to the samples submitted
4. A letter of transmittal, in triplicate, from the Contractor requesting acceptance must accompany all such samples.
 5. Transportation charges to the Design Consultant's office must be prepaid on all samples forwarded.
 6. Samples for testing purposes shall be as required in the Specifications.
 7. Samples on Display: When samples are specified to be equal to approved product, they shall be carefully examined by the Contractor and by those whom the Contractor expects to employ for the furnishing of such materials.
 8. Timely Submissions Log/Schedule: Samples shall be submitted in accordance with approved Shop Drawing log so as to permit proper consideration without delaying any operation under the project. Materials should not be ordered until acceptance is received, in writing, from the Design Consultant. All materials shall be furnished equal in every respect to the accepted samples.
 9. The Acceptance of any samples will be given as promptly as possible, and shall be only for the characteristic color, texture, strength, or other feature of the material named in such approval, and no other. When this approval is issued by the Design Consultant, it is done with the distinct understanding that the materials to be furnished will fully and completely comply with the Specifications, the determination of which may be made at some later date by a laboratory test or by other procedure. Use of materials will be permitted only so long as the quality remains equal to the approved samples and complies in every respect with the Specifications, and the colors and textures of the samples on file in the office of the Design Consultant, for the project.
 10. Acceptability of test Data: The Commissioner will be the final judge as to acceptability of laboratory test data and performance in service of materials submitted.
 11. Valuable Samples: Valuable samples, such as hardware, plumbing and electrical fixtures, etc., not destroyed by inspection or test, will be returned to the Contractor and may be incorporated into the work after all questions of acceptability have been settled, providing suitable permanent records are made as to the location of the samples, their properties, etc.
 12. Equivalent Quality: Any material, article and/or equipment which is designated in the Drawings and/or Specifications by a number in the catalogue of any manufacturer or by a manufacturer's grade or trade name is designated for the purpose of describing the material, article and/or equipment and fixing the standard of performance and/or function, as well as the quality and/or finish. Any material, article and/or equipment which is other than what is specified in the Drawings and/or Specifications will only be accepted if the Commissioner makes a written determination that such material, article and/or equipment is equivalent to that which is specified in the Drawings and/or Specifications.
 13. The submission of any material, article and/or equipment as the equal of any material, article and/or equipment set forth in the Drawings and/or Specifications as a standard shall be accompanied by any and all information essential for determining whether such proposed material, article and/or equipment is equivalent to that which is specified. Such information shall include, without limitation, illustrations, drawings, descriptions, catalogues, records of tests, samples, as well as information regarding the finish, durability and satisfactory use of such proposed material, article and/or equipment under similar operating conditions.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.7

1.7 LEED SUBMITTALS:

- A. Comply with submittal requirements specified in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL; Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS; Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS; Section 01 81 19, INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS and Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.
- B. LEED Building submittal information shall be assembled into one package per each applicable specification section, separate from all other non-LEED submittals. Each submittal package shall have a separate transmittal and identification as described in Sub-Section 1.5 herein.
- C. Number of Copies: Submit FOUR (4) copies of LEED submittals, in accordance with procedure described in Article 1.5 herein, unless otherwise indicated.
- D. Material Safety Data Sheets (MSDSs) for LEED Certification: Submit information necessary to show compliance with LEED certification requirements, which will be the limit of the Design Consultant's review for LEED compliance.
 - 1. Designated LEED submittals that include non-LEED MSDS data will not be reviewed. The entire submittal will be returned for re-submission.
- E. Product Cut Sheets and/or Shop Drawings for LEED Certification: Provide product cut sheets and/or shop drawings with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project. For detailed requirements refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.
 - 1. Provide the quantity, length, area, volume, weight, and/or cost of each product submitted as required to satisfy LEED documentation requirements. Refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.

1.8 ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING:

- A. In accordance with Section 01 10 00 Summary, Sub-Section 1.5 E, the Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel and Best Available Technology (BAT) in Non road Vehicles. Submission of such reports shall be in accordance with the schedule, format, directions and procedures established by the Commissioner.

1.9 CONSTRUCTION PHOTOGRAPHS AND DVD RECORDINGS:

- A. Submit construction progress photographs and DVD recordings in accordance with requirements of Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION

1.10 AS-BUILT DOCUMENTS:

- A. Submit all as-built documents in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 33 00



SECTION 01 35 03

GENERAL MECHANICAL REQUIREMENTS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 03

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. The General Mechanical Requirements contained herein shall be followed by the Contractor, as well as its subcontractor for HVAC work. This Section sets forth the General Requirements applicable to mechanical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. **CONCEALED PIPING AND DUCTS** -: shall mean piping and ducts hidden from sight in masonry or other construction, in floor fill, trenches, partitions, hung ceilings, furred spaces, pipe shafts and in service tunnels not used for passage. Where piping and ducts run in areas that have hung ceilings, such piping and ducts shall be installed in the hung ceilings. For work on existing piping any insulation on such existing piping is to be tested for asbestos and abated, if found to be positive by a certified asbestos contractor. Such testing and abatement shall occur prior to the performance of any work on these pipes.

1.5 SUBMITTALS:

- A. **INTENT OF MECHANICAL CONTRACT DRAWINGS** – Mechanical Contract Drawings are in part diagrammatic and show the general arrangement of the equipment, ducts and piping included in the Contract and the approximate size and location of the equipment.
- B. The Contractor shall follow these Contract Drawings in laying out the work and verify the spaces in which it will be installed. The Contractor shall submit, as directed, Mechanical Shop Drawings, roughing drawings, manufacturer's Shop Drawings, field drawings, cuts, bulletins, etc., of all materials, equipment and methods of installation shown or specified in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.



1. Submit sheet metal shop standards. Submit manufacturer's product data including gauges, materials, types of joints, scaling materials and installations for metal ductwork materials and products.
2. Submit scaled layout drawing (3/8"=1') of metal ductwork and fittings including, but not limited to, duct sizes, locations, elevations, slopes of horizontal runs, wall and floor penetrations and connections. Show modifications of indicated requirements made to conform to local shop practice and how those modifications ensure that free area, materials and rigidity are not reduced. Layouts should include all the room plans, mechanical equipment rooms and penthouses. Method of attachment of duct hangers to building construction all with the support details. Coordinate shop drawings with related trades prior to submission.
3. Indicate duct fittings, particulars such as gauges, sizes, welds and configuration prior to start of work for low-pressure systems.
4. Submit maintenance data and parts lists for metal ductwork materials and products. Include this data, product data and shop drawings in maintenance manual.

1.6 ACCESSIBILITY:

All work shall be installed by the Contractor so as to be readily accessible for inspection, operation, maintenance and repair. Minor deviations from the arrangement indicated on the Contract Drawings may be made to accomplish this, but they shall not be made without approval by the Commissioner.

1.7 CHANGES IN PIPING, DUCTS, AND EQUIPMENT:

Wherever field conditions are such that for proper execution of the work, reasonable changes in location of piping, ducts and equipment are necessary and required, the Contractor shall make such changes as directed and approved, without extra cost to the City.

1.8 CLEANING OF PIPING, DUCTS, AND EQUIPMENT:

Piping, ducts and equipment shall be thoroughly cleaned by the Contractor of all dirt, cuttings and other foreign substances. Should any pipe, duct or other part of the several systems be obstructed by any foreign matter, the Contractor will be required to pay for disconnecting, cleaning and reconnecting wherever necessary for the purpose of locating and removing obstructions. The Contractor shall pay for repairs to other work damaged in the course of removing obstructions. For work on existing piping, ducts and equipment the Contractor shall pay special attention during this task so as not to disturb the insulation on such piping, ducts or equipment.

1.9 STANDARDIZATION OF SIMILAR EQUIPMENT:

Unless otherwise particularly specified, all equipment of the same kind, type or classification, and used for identical purposes, shall be the product of one (1) manufacturer.

1.10 SUPPORTING STRUCTURES DESIGNED BY THE CONTRACTOR:

Unless otherwise specified, supporting structures for equipment to be furnished by the Contractor shall be designed by an Engineer licensed in New York State retained by the Contractor. Supporting structures shall be built by the Contractor of sufficient strength to safely withstand all stresses to which they may be subjected, within permissible deflections, and shall meet the following standards:

- A. Structural Steel - ASTM Standard Specifications, AISC and New York City Construction Codes.



- B. Concrete for supports for equipment shall conform to the Specifications for concrete herein, but in no case shall be less than the requirements of the New York City Construction Codes for average concrete.
- C. Steel reinforcement for concrete shall be of intermediate grade and shall meet the requirements of the Standard Specifications for Billet Steel-Concrete Reinforcement Bars, ASTM.
- D. Drawings and calculations shall be submitted for review and acceptance in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

1.11 ELIMINATION OF NOISE:

- A. All systems and/or equipment provided under the Contract shall operate without objectionable noise or vibration.
- B. Should operation of any one or more of the several systems produce noise or vibration which is, in the opinion of the Commissioner, objectionable, the Contractor shall at its own expense make changes in piping, equipment, etc. and do all work necessary to eliminate objectionable noise or vibration.
- C. Should noise or vibration found objectionable by the Commissioner be transmitted by any pipe or portions of the structure from systems and/or equipment installed under the Contract, the Contractor shall at its own expense install such insulators and make such changes in or additions to the installations as may be necessary to prevent transmission of this noise or vibration.

1.12 PRELIMINARY FIELD TEST:

As soon as conditions permit, the Contractor shall furnish all necessary labor and materials for, and shall make, preliminary field tests of the equipment to ascertain compliance with the requirements of the Contract. If the preliminary field tests disclose equipment that does not comply with the Contract, the Contractor shall, prior to the acceptance test, make all changes, adjustments and replacements required.

1.13 INSTRUCTIONS ON OPERATION:

At the time the equipment is placed in permanent operation by the City, the Contractor shall make all adjustments and tests required by the Commissioner to prove that such equipment is in proper and satisfactory operating condition. The Contractor shall instruct the City's operating personnel on the proper maintenance and operation of the equipment for the period of time called for in the Specifications.

1.14 CERTIFICATES:

On completion of the work, the Contractor shall obtain certificates of inspection, approval, acceptance and of compliance with all laws from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES. The work shall not be deemed substantially complete until the certificates have been delivered. See General Comments regarding problems with specifying items required for substantial completion.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 35 03



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

No Text



SECTION 01 35 06
GENERAL ELECTRICAL REQUIREMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section sets forth the General Requirements applicable to electrical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Project Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.
- B. This Section includes the following:
 - 1. Procedure for Electrical Approval
 - 2. Submittals
 - 3. Electrical Installation Procedures
 - 4. Electrical Conduit System Including Boxes (Pull, Junction and Outlet)
 - 5. Electrical Wiring Devices
 - 6. Electrical Conductors and Terminations
 - 7. Circuit Protective Devices
 - 8. Distribution Centers
 - 9. Motors
 - 10. Motor Control Equipment
 - 11. Schedule of Electrical Equipment

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. **WIRING:** means both wire and raceway (rigid steel, heavy wall conduit unless specifically indicated otherwise).
- B. **POWER WIRING:** means wiring from a panel board or other specified source to a starter (if required) then to a disconnect (if required), then to the final point of usage such as a motor, unit or device.
- C. **CONTROL and/or INTERLOCK WIRING:** means that wiring that signals the device to operate or shut down in response to a signal from a remote control device such as a temperature, smoke, pressure, float,

etc. device (starters and disconnect switches are not included in this definition) regardless of the voltage required for the controlling device.

- D. **RIGID STEEL CONDUIT:** shall mean rigid steel, heavy wall conduit that is hot dipped galvanized inside and outside. The conduit shall meet the requirements of the latest edition, as amended, of the "Standard for Rigid Steel Conduit" of the Underwriters' Laboratories, Inc. Unless otherwise specified in the Specifications or indicated on the Contract Drawings, rigid steel conduit shall be used for all exposed work, for all underground conduits in contact with earth and for fire alarms systems, as required by the New York City Construction Codes.
- E. **ELECTRICAL METALLIC TUBING (EMT):** shall mean industry standard thin wall conduit of galvanized steel only. All elbows, bends, couplings and similar fittings which are installed as a part of the conduit system shall be compatible for use with electric metallic tubing. Couplings and terminating fittings shall be of the pressure type as approved by the Commissioner. Set screw fittings will not be acceptable. EMT shall meet the requirements of the latest edition, as amended, of the "Standard for Electrical Metallic Tubing of the Underwriters Laboratories Inc." EMT may only be used where specifically indicated. In no case will EMT be permitted in spaces other than hung ceilings and dry wall partitions.
- F. **FLEXIBLE METALLIC CONDUIT (FMC):** Shall mean a conduit made through the coiling of a self-interlocking ribbed strip of aluminum or steel, forming a hollow tube through which wires can be pulled. For final connections to motors and motorized equipment, not more than a 4' - 0" length of flexible conduit may be used. For watertight installations, this conduit shall be of a watertight type, attached with watertight glands or fittings for final connections from outlet box to recessed lighting fixtures and in locations only where specifically permitted by the Specifications or Contract Drawings.

1.5 PROCEDURE FOR ELECTRICAL APPROVAL:

This Sub-Section sets forth General Electrical information, as well as required approvals for all electrical work required for the Project, including ancillary electrical work which may be included in the work of other trade subcontractors.

- A. **ELECTRIC SERVICE:** The electric service supply is subject to commercial and operating variation of the utility company. Proper provision shall be made to have all apparatus operate normally under these conditions.
- B. **ACCEPTANCE:** Acceptance and approval of the work will be contingent upon the inspection and test of the installation by the City regulatory agency.
- C. **TESTS:** The Contractor shall notify the Commissioner when the Contractor has completed the work and is ready to have it inspected and tested. Upon completion of the work tests shall be made as required by the Commissioner of all electrical materials, electrical and associated mechanical equipment, and of appliances installed hereunder. The Contractor shall furnish all labor and material for such tests. Should the tests show that any of the material, appliances or workmanship is not first class or not in compliance with the Contract, the Contractor on written notice shall remove and promptly replace them with other materials in conformity with the Contract.
- D. **CERTIFICATE OF THE BUREAU OF ELECTRICAL CONTROL, OF THE DEPARTMENT OF BUILDINGS (B.E.C.):** The Contractor must file prior to requesting a substantial completion inspection a Certificate of Inspection issued by B.E.C. On completion of the work the Contractor shall obtain certificates of inspection, approval, acceptance and compliance from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES.
- E. **RESPONSIBILITY FOR CARE AND PROTECTION OF EQUIPMENT:**
 - 1. The Contractor furnishing any equipment shall be responsible for the equipment until it has been finally inspected, tested and accepted, in accordance with the requirements of the Contract.



2. After delivery and before and after installation, the Contractor shall protect all equipment against theft, injury or damage from all causes. The Contractor shall carefully store all equipment received for work, which is not immediately installed. If any equipment has been subject to possible injury by water, it shall be thoroughly dried out and put through a special dielectric test as directed by the Commissioner, at the expense of the Contractor or replaced by the Contractor without additional cost to the City.
- F. **UNIFORMITY OF EQUIPMENT:** Any two (2) or more pieces of equipment, apparatus or materials of the same kind, type or classification which are intended to be used for identical types of service, shall be made by the same manufacturer.

1.6 SUBMITTALS:

A. **CONTRACTOR'S ELECTRICAL DRAWINGS AND SAMPLES FOR APPROVAL:**

1. The Contractor shall submit to the Commissioner for approval, in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, complete dimensional drawings of all equipment, wiring diagrams, motor test data, details of control, installation layouts showing all details and locations and including all schedules, and descriptions and supplementary data to comprise complete working drawings and instructions for the performance of the work. A description of the operation of the equipment and controls shall be included. A letter, in triplicate, shall accompany each submittal.
2. The Contractor shall submit in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, duplicate samples of such materials and appliances as may be requested by the Commissioner for approval. These samples shall be properly tagged for identification and submitted for examination and test. After the samples are approved, one (1) sample will be returned to the Contractor and the other sample will be filed in the office of the Commissioner's representative for inspection use. After the Contract is completed, the second set of samples will be returned to the Contractor.

- B. **TIMELINESS:** All material shall be submitted in accordance with the submittal schedule in sufficient time for the progress of construction. Failure to promptly submit acceptable samples and dimensional drawings of equipment will not be accepted as grounds for an extension of time. The Commissioner may decline to consider submittals unless all related items are submitted at the same time.
- C. **CONTRACTOR'S STATEMENT WITH SUBMITTALS:** Contractor shall submit statement in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- D. **BULLETINS AND INSTRUCTIONS:** The Contractor shall furnish and deliver to the Commissioner in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS and Section 01 77 00, CLOSEOUT PROCEDURES, after acceptance of the work, four (4) complete sets of instructions, technical bulletins and any other printed matter (diagrams, prints, or drawings) required to provide complete information for the proper operation, maintenance and repair of the equipment and the ordering of spare parts.

PART II – PRODUCTS (Not Used)



PART III – EXECUTION

3.1 ELECTRICAL INSTALLATION PROCEDURES:

This Sub-Section sets forth the General Installation Procedure that shall apply to all electrical work and electrical equipment appearing in the Contract.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

- A. **INTENT OF CONTRACT DOCUMENTS:** The Drawings and Specifications are to be interpreted as a means of conveying the scope and intent of the work without giving every minor electrical detail. It is intended, nevertheless, that the Contractor shall provide whatever labor and materials are found necessary, within the scope of the Contract, for the successful operation of the installation. Specific details of individual installations are to be finally decided upon when the Contractor submits Working or Shop Drawings for approval to DDC. Whenever there are two (2) or more methods to complete project work within the Contract scope, the Commissioner reserves the right to choose that method which, in the Commissioner's opinion, will afford the most satisfactory performance, lasting qualities, and accessibility for repairs, even though this selection is the most costly.
- B. **SCHEMATIC PLANS – APPROXIMATE LOCATIONS:** Conduits and wiring are shown on the plans for diagrammatic purposes only. Therefore, conduit layouts may not necessarily give the actual physical route of the conduits. The Contractor who installs a conduit system will also be required, as part of the work, to furnish and install all hangers and pull-boxes, including any special pull-boxes found necessary to overcome interferences, and to facilitate the pulling of electrical cables. Similarly, the locations of equipment, appliances, outlets and other items shown on Contract Drawings are only approximate and are to be definitively established when equipment Shop Drawings are submitted and approved by DDC during construction.
- C. **SLEEVES:** required for conduits passing through walls or floors, shall be furnished and set by the Contractor installing the conduits. Sleeves in waterproofed floors shall be provided with flashing extending 12 inches in all directions from sleeve and secured to waterproofing. Flashing shall be turned down into space between pipe and sleeve and caulked watertight. Flashing shall be 20 oz. cold rolled copper. Sleeves shall be supplied with welded flanges similar to those supplied by the subcontractor for Plumbing Work and shall extend one (1) inch above finished floor.
- D. **COORDINATION:** The Contractor shall keep in close touch with the construction progress and obtain the necessary information for the accurate placement of its work in ample time before project construction operations obstruct its work. The Contractor is to consult all other Contract Drawings, as well as approved equipment Shop Drawings on file in the Resident Engineer's Field Office. This will aid in avoiding interferences, omissions and errors in the electrical installation.
- E. **RESTORATION:** If drilling or cutting is done on finished surfaces of equipment or the structure, any marring of the surface shall be repaired or replaced by the Contractor. The Contractor shall be held responsible for corrective restoration due to its cutting or drilling, and for any damage to the project or its contents caused by the Contractor or the Contractor's workers. If any piercing of waterproofing occurs because of the installation of the work, the Contractor shall restore the waterproofing, at its own expense, to the satisfaction of the Commissioner.
- F. **ELECTRICAL WORK AT SITE:** The Contractor furnishing equipment consisting of a number of related electrical devices or appliances, mounted in a single enclosure, or on a common base, shall furnish this unit complete with internal wiring, connections, terminal boxes with copper connectors and/or lugs and ample electrical leads, ready for connection and operation. The cost of any wiring, re-wiring or other work required to be done on this unit in the field, shall be borne by the Contractor, without additional cost to the City.
- G. **COOPERATION AMONG SUBCONTRACTORS:** Whenever an electrically operated unit or system involves the combined work of several subcontractors for its installation and successful operation, the

Contractor shall require each subcontractor to exercise the utmost diligence in cooperating with others to produce a complete, harmonious installation.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 ELECTRICAL CONDUIT SYSTEM INCLUDING BOXES (PULL, JUNCTION AND OUTLET):

This Sub-Section sets forth the requirements applying to the installation of electrical conduits, boxes or fittings. Rigid steel conduit shall be used throughout, unless otherwise directed by the Commissioner. Where the word 'conduit', without a modifier such as, rigid steel, EMT, etc., is specified to be used, it shall be interpreted to mean, rigid steel, heavy wall, threaded conduit.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

A. INSTALLATIONS AND APPLICATIONS:

1. Unless otherwise specified or indicated on the Contract Drawings, conduit runs shall be installed concealed in finished spaces.
2. **CONDUIT SIZES:** The sizes of conduit shall be as indicated on the Contract Drawings. Wherever conduit sizes are not indicated, the conduit shall meet the requirements of the New York City Electrical Code to accommodate the conductors to be installed therein.
3. Conduits shall be reamed smooth after cutting. No running threads will be permitted. Universal type couplings shall be used where required. Conduit joints shall be screwed up to butt. Empty conduits after installation shall have all open ends temporarily plugged to prevent the entrance of water or other foreign matter.
4. Conduits being installed in concrete or masonry shall be securely held in place during pouring and construction operations. A group of conduits terminating together shall be held in place by a template.
5. **UNDERGROUND STEEL CONDUITS:** Unless otherwise specified, all underground steel conduits in contact with earth shall be encased by the Contractor who installs them, in a covering of not less than two (2) inches of an approved concrete mixture. Concrete mix shall be one (1) part cement to four and one-half (4 ½) parts of fine and coarse aggregate.
6. **EXCAVATION RESTORATION PERMITS:** When installing underground conduits, duct banks or manholes the Contractor shall perform the work of cutting pavement, excavation shoring, keeping trenches or holes pumped dry, backfilling, restoration of surfaces to original condition and removal of excess earth and rubbish from premises. During the work, the Contractor shall provide adequate crossovers, protective barriers, lamps, flags, etc., to safeguard traffic and the public. When the work is in a public highway or street, the Contractor shall secure and pay for all necessary permits and inspection fees and pay the cost of repaving.
7. **EXPOSED CONDUIT SUPPORTS:** Exposed conduit shall be supported by Galvanized hangers with necessary inserts, beam clamps of approved design or attached to walls or ceilings by expansion bolts. Exposed conduits shall be supported or fastened at intervals not more than five (5) feet.
8. Exposed conduit shall be installed parallel or at right angles to ceiling, walls and partitions. Where direction changes of exposed conduit cannot be made with neat bends, such as required around beams or columns, conduit type fitting shall be used.



9. The conduit shall be installed with an approved expansion joint:
 - a. Wherever the conduit crosses a building expansion joint the Contractor will be held responsible for determining where the building expansion joints are located.
 - b. Every 200 feet, when in straight runs of 200 feet or longer.
10. Conduit may only enter and leave a floating slab in the vertical direction, and then only in an approved manner. Horizontal entries into floating slabs are not permitted.
11. Conduit installed in pipe shafts shall be properly supported to carry the total weight of the raceway system complete with cable. In addition at least one (1) horizontal brace per 10 ft. section shall be provided to assure stability of the raceway system.
12. **BUSHINGS AND LOCKNUTS:** Approved bushings and locknuts shall be used wherever conduits enter outlet boxes, switch boxes, pull boxes, panel board cabinets, etc.
13. **CONDUIT BENDS:** shall be made without kinking conduit or appreciably reducing the internal diameter. All bends in conduit of two (2) inch in diameter or larger shall be made with an hydraulic or power pipe bender. The radius of the inner edge of any bend shall not be less than six (6) times the internal diameter of the conduit where rubber covered conductors are to be installed, and not less than 10 times the internal diameter of the conduit where lead covered conductors are to be used. Long gradual sweeps will be required, rather than sharp bends, when changes of direction are necessary.
14. **EMPTY CONDUITS**
 - a. **TESTS:** All conduits and ducts required to be installed and left empty shall be tested for clear bore and correct installation by the Contractor using a ball mandrel and a brush and snake before the installation will be accepted. The ball shall be turned to approximately 85% of the internal diameter of the raceway to be tested. Two (2) short wire brushes shall be included in the mandrel assembly. Snaking of conduits, ducts, etc., shall be performed by the Contractor in the presence of the Resident Engineer. Any conduits or ducts which reject the mandrel shall be cleared at once with the Contractor bearing all costs, such as chopping concrete, to replace the defective conduit and restore the surface to its original condition.
 - b. **TAGS:** Numbers or letters shall be assigned to the various conduit runs, and as they test clear they shall be identified by a fiber tag not less than 1-¼ inch width, attached by means of a nylon cord. All conduit terminations in panel, splice or pull boxes as well as those out of the floor or ceiling shall be tagged.
 - c. **TEST RECORDS:** As the conduit runs clear, a record shall be kept under the heading of "Empty Conduit Tested, Left Clear, Tagged and Capped" showing conduit designation, diameter, location, date tested and by whom. When complete, this record shall be signed by the Resident Engineer and submitted in triplicate for approval. This record shall be entered on the Contract Record Drawings under Section 01 78 39, CONTRACT RECORD DOCUMENTS.
 - d. **CAPPING:** All empty conduit and duct openings, after test, shall be capped or plugged by the Contractor as directed.
 - e. **DRAG LINES:** A drag line shall be left in all empty conduit.

B. BOXES:

1. The Contractor shall furnish and erect all pull boxes indicated on the plans or where required. Sides, top and bottom of pull boxes shall be Galvanized coated and shall be built of No. 12 USSG steel reinforced at corners by substantial angle irons and riveted or welded to plates. Bottom or side

- of pull boxes shall be removable and held in place by corrosion resistant machine screws. Pull boxes in damp locations shall have threaded hubs and gaskets and be NEMA 4X. All pull boxes shall be suspended from ceiling or walls in the most substantial manner.
2. In centering outlets, the Contractor is cautioned to allow for overhead pipes, ducts and other obstructions, and for variations in arrangement and thickness of fireproofing, soundproofing and plastering. Precaution should be exercised regarding the location of window and door trims, paneling, etc. Mistakes resulting from failure to exercise precaution must be corrected by the Contractor at no additional cost to the City. Outlets in hung ceilings shall be supported from the black iron or structure.
 3. The exact location of all outlets in finished rooms shall be as directed. When the interior finish has been applied, the Contractor shall make any necessary adjustment of its work to properly center the outlets. All outlet boxes for local switches near doors shall be located at the strike side of doors as finally hung, whether so indicated on the drawings or not.
 4. Exposed wall outlet boxes shall be erected neatly and tight against the walls and securely anchored to same.
 5. All wall outlets of each type shall be set accurately at the same level on each floor, except where otherwise specified or directed. Where special conditions occur, outlets shall be located as directed.
 6. **MOUNTING HEIGHTS:** The following heights are standard heights and are subject to correction due to coordination with Contract Drawings. All such changes must be approved by the Resident Engineer. Heights given are from finished floor to center line of outlet or device on wall or partition, unless otherwise indicated.

a. General Convenience Outlets (mount vertical)	1'-6"
b. Clock Outlets	8'-6" or 1'-6" below ceiling
c. Wall Lighting Switches	4'-0"
d. Motor Controllers	5'-0"
e. Motor Push-button	4'-2"
f. Telephone Outlets	As Directed
g. Fire Alarm Bells	8'-6" or 1'-6" below ceiling
h. Fire Alarm Stations	4'-0"
i. Intercom Outlet	1'-6"
j. Cooking and Refrigerator Unit	As Directed
 7. Outlet boxes shall be of approved design and construction; of form and dimensions suited and adapted to its specific location; the kind of fixture to be used and the number and arrangements of conduits, etc., connecting therewith. All ferrous outlet boxes shall meet the requirements for zinc coating as specified under Electrical Conduit Systems.
 8. There shall be knockouts opened only for the insertion of conduit. Any outlet boxes with more openings than are necessary for conduit insertion shall be sealed by the Contractor without additional charge.
 9. All outlet boxes and junction boxes for exposed work shall be galvanized cast iron or cast aluminum with threaded openings. Outlet boxes for exposed inside work in damp locations shall be galvanized cast iron or cast aluminum with threaded hubs and neoprene gaskets.
 10. Junction boxes shall not be less than 4 11/16" square and shall be equipped with zinc coated plates. Where plates are exposed they shall be finished to match the room decor.



11. **FIXTURE SUPPORTS:** Outlet boxes supporting lighting fixtures shall be equipped with fixture studs held by approved galvanized stove bolts or integral with the box. Cast iron or malleable boxes shall have four (4) tapped holes for mounting required cover or fixtures.
12. Outlet boxes exposed to the weather or indicated W.P. shall be cast iron or cast aluminum and the covers made watertight with neoprene gaskets. The boxes shall have external lugs for mounting. Drilling of the body of the fitting for mounting will not be permitted. The cover screws shall be appropriate in size, non-corrodible and not less than four (4) in number for each box opening.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 ELECTRICAL WIRING DEVICES:

- A. **WALL SWITCHES** shall be of the best specification grade, quiet type, and shall have a rating of 20 Amperes at 277 volts, as manufactured by Bryant, Hubbell or approved equal. The mechanism shall be equipped with arc snuffers. They shall be of the tumbler type, single pole. Switches of the 3-way type shall have a similar rating.
- B. **RECEPTACLES:**
 1. **CONVENIENCE OUTLETS:** shall be of the best specification grade, duplex, two-pole, 3-wire, 20 Amperes at 125 volts. It shall have a grounding pole that shall be grounded to the conduit system. Receptacles shall be capable of both back and side wiring and shall have only one (1) grounding screw. Receptacles shall be Hubbell Cat. #5262 or approved equal.
 2. **HEAVY DUTY RECEPTACLE OUTLETS:** shall have the Ampere rating and the number of poles specified on the Contract Drawings and shall be Hubbell, Russell-Stoll, Bryant, AH & H or approved equal. Each outlet shall have a grounding pole, which shall be grounded to the conduit system.
 3. **FLOOR RECEPTACLES:** shall be Russell & Stoll #3040 or approved equal, to fit into floor box previously specified.
 4. **NAMEPLATES:** are required for all receptacles other than 120V.
- C. **CLOCK HANGERS:** Clock outlets for surface type clocks shall be equipped with a supporting hook and recessed faceplate to conceal the electrical cord.
- D. **WATERTIGHT DEVICES:** For installations exposed to weather or in damp locations, the devices shall be in a gasketed, cast iron enclosure.
- E. **PLATES:**
 1. Every convenience outlet and switch outlet shall be covered by means of a stainless steel No. 302 - 0.4" antimagnetic plate with an approved finish, unless provided otherwise in the detailed Specifications.
 2. Where two (2) or three (3) switches are grouped together, a single faceplate shall be used. Where more than three (3) switches are located at one (1) point, the faceplates may be made up in multiple units.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 ELECTRICAL CONDUCTORS AND TERMINATIONS:

- A. **CONDUCTORS FOR LIGHT AND POWER** - All wire and cable shall be of annealed copper of 98% conductivity. Aluminum wire or cable will not be permitted. The insulation shall be flame retardant, moisture and heat resistant, thermoplastic, type THW or THWN rated for 600 volts at 75 degrees C. for



both wet and dry locations. Wires No. 8 or larger shall be stranded. Wires and cables shall also be subject to the requirements of the NYCEC. Cables for incoming service or wire in conduits contiguous with the earth or in concrete or other damp or wet locations shall be synthetic rubber insulated with neoprene jacket, heat and moisture resistant and shall be equal to UL Type USE and rated for 600 volts at 75 degrees C. for both wet and dry locations.

- B. **FIXTURE WIRE:** Lighting fixtures shall be wired with No. 14 gauge wire designated as AWM and rated at 105 degrees C.
- C. **OTHER TYPES:** Cables and wires for interior communication systems are described in applicable detailed Specifications.
- D. **MINIMUM SIZE:** Conductors smaller than No. 12 AWG shall not be used for light or power.
- E. **COLOR CODE:** Wires shall have a phase color code, and multiple conductor cables shall be color coded.
- F. **CABLE DATA:** The Contractor shall submit for approval the following information for each size and type of cable to be furnished.
 - 1. Manufacture of Cable - Location of Plant.
 - 2. Minimum insulation resistance at standard test temperature.
 - 3. Days required for delivery to site of work after order to proceed with manufacture.
- G. **ORIGINAL REELS:** Cable and wire shall be delivered to the site of the work on original sealed factory reels.
- H. **WIRE INSTALLATION:**
 - 1. **INSTALL WIRES AFTER PLASTERING** - Feeder and branch circuits wiring shall not be installed in conduit before the rough plastering work is completed. No conductors shall be pulled into floor conduits before floor is poured.
 - 2. **CONDUIT SECURED IN PLACE** - No conductor shall be pulled into any conduit run before all joints are made up tightly and the entire run rigidly secured in place.
 - 3. **WIRE ENDS** - All wires shall be left with sufficiently long ends for proper connection and stowing.
 - 4. **PULLING COMPOUNDS** - When required to ease the pulling-in of wires into conduit, only approved compounds as recommended by cable manufacturers shall be used.
 - 5. **PRESSURE CONNECTORS** - for wires shall be of the cast copper or forged copper pressure plate type. Connectors shall be O.Z., Burndy, National Electric Products or approved equal.
 - 6. Splices and feeder taps in the gutters of panel boxes shall be made by means of pressure plate type connectors encased in composition covers as manufactured by O.Z., Burndy, National Electric Products or approved equal.
 - 7. Splices in branch wiring for sound systems and fire systems, shall be first made mechanically secure, then soldered and taped.
 - 8. In lieu of soldered splices (except for sound and Fire Systems, which must have soldered splices) the following alternates are acceptable for operating temperatures up to 105 degrees C., for fluorescent fixtures and for the splicing of branch circuit wiring up to No. 8 AWG wire:
 - a. Mechanical splices made with mechanical connectors as manufactured by the Minnesota Manufacturing Company "Scotchlock" or approved equal. Mechanical connectors requiring a special tool (pressure connectors, insulators and locking rings) by Buchanan or approved equal. The tool used for connector application shall be as approved by the connector manufacturer.

- b. For wire and cable No. 6 AWG and larger for branch circuit wiring the seamless tubular connector will only be accepted. Application of this connector shall be with a tool recommended by the connector manufacturer.
 9. TAGS: All feeders and risers shall be tagged at both ends, and in all pull and junction boxes and gutter spaces through which they pass. Such tags shall be of fiber and have the feeder designation and size stamped thereon.
 10. BRANCH CIRCUIT WIRING:
 - a. The Contractor installing branch circuit wiring shall test the work for correct connections and leave all loop splices in the fixture outlet boxes properly spliced and taped. The Contractor shall provide wire ends long enough for convenient connection to device.
 - b. NEUTRALS: No common neutrals shall be used except for lighting branch circuits. Each neutral wire shall be terminated separately on a neutral busbar in the panelboard. No common neutrals will be permitted for convenience receptacle branch circuits.
- I. TERMINATIONS
1. LUGS: All lugs for all devices and all cable terminations shall be copper. AL/CU rated lugs will not be permitted. The only exception to this requirement is when the particular device is not manufactured with copper lugs by any manufacturer. Lugs for No. 6 AWG cable and larger shall be cast copper or forged copper pressure plate type. Lugs for 1/0 and larger shall be fastened with two (2) bolts.
 2. All lugs shall be of the proper size to accept the cable connected to them. Any subcontractor furnishing a device containing lugs is to coordinate with the Contractor to insure that the device terminations are adequate for the wire or cable (whose size may be larger than expected due to voltage drop considerations) connected to the device.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 CIRCUIT PROTECTIVE DEVICES:

This Section sets forth the circuit protective devices such as circuit breakers and safety switches, used in connection with Motor Control Equipment, Distribution Centers, Panel boards and Service Entrance.

A. CIRCUIT BREAKERS:

1. CIRCUIT BREAKERS: shall be operable in any position and shall be of the quick-make, quick-break type on manual operation. The handle shall be trip free, preventing contacts from being held in closed position against abnormal overloads or short circuits. Positive visual indication of automatic tripped position of breaker shall be provided, in addition to the "On" and "Off" indication. All circuit breakers shall be of the bolted type.
2. TRIP RATING: Circuit breakers shall be provided with the required number of trip elements, calibrated at 40 degrees C., ambient temperature, in accordance with wire sizes or motor currents as shown on Contract Drawings or indicated in the Specifications.
3. POLE BARRIER: Multipole pole breakers shall be designed to break all poles simultaneously. They shall be provided with barriers between poles and arc suppressing devices.
4. ELEMENTS: Multipole circuit breakers shall have frames of not less than a 100 Ampere rating. Multipole circuit breakers for 480 volts AC operation shall have an NEMA interrupting rating of 18,000 Amperes, unless a higher rating is specified in the Specific Requirements or indicated on the Contract Drawings.



5. For circuit breakers with frame size up to and including 225 Amperes, the breakers may be provided with non-interchangeable trip elements. For frame ratings above 225 Amperes, the breakers shall be provided with interchangeable trip elements, which can be replaced readily.
6. Single pole circuit breakers for branch circuits shall have a frame size of no less than 100 Amperes, and shall be rated at 125 volt A.C. with a NEMA interrupting rating of 10,000 Amperes, unless a higher rating is specified in the Specifications or indicated on the Contract Drawings.
7. **INVERSE TIME ACTION:** The circuit breakers shall be dual element type, one (1) element with time limit characteristics, so that tripping will be prevented on momentary overloads, but will occur before dangerous values are reached and the other with instantaneous trip action. Inverse time delay action shall be effective between a minimum tripping point of 125% of rating of breaker and an instantaneous tripping point between 600% and 700% of rated current.
8. **CONSTANCY OF CALIBRATION:** The tripping elements shall insure constant calibration and be capable of withstanding excessive short circuit conditions without injury.
9. **CONTACTS:** shall be non-welding under operating conditions and of the silver to silver type.
10. **TEMPERATURE RISE:** Current carrying parts, except thermal elements, shall not rise in temperature in excess of 30 degrees C. while carrying rated current at rated frequency.
11. **NUMBERING:** Each circuit breaker shall be distinctly numbered when installed in a group with other breakers. The calibration of trip element shall be indicated on each breaker.

B. SAFETY SWITCHES:

NEMA TYPE HD: When safety switches are permitted to be used for service entrance, motor disconnecting means or to control other types of electrical equipment, they shall be of the type HD of a rating not less than 30 Amperes. Enclosures shall be provided with means for locking. For ratings above 60 Amperes terminals shall have double studs.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.6

3.6 DISTRIBUTION CENTERS:

This Section sets forth the construction and installation procedure for Switchboards, Panel boards and Cabinets.

- A. **PANELBOARDS-GENERAL TYPE:** The panel boards shall be of the automatic circuit breaker type with individual breakers for each circuit, removable without disturbing the other units. Circuit breakers shall be in accordance with the requirements outlined under "Circuit Protective Devices."
- B. **NUMBER AND RATING OF CIRCUIT BREAKERS:** The Contract Drawings show a layout of each panel, giving the number, frame, size and trip setting of circuit breakers and number of branch circuits and spare breakers. Each branch circuit shall be distinctly numbered.
- C. **BUS-BAR CONSTRUCTION AND SUPPORT:** Panel Boards shall be of the dead front type and shall have bus bars and branch circuits designed to suit the system and voltage. Current carrying parts, exclusive of circuit breakers shall be copper and based on a maximum density of 1,000 Amperes per square inch. Bus bars for the main switchboard shall be designed for the frame rating of the Service Breaker. Bus bars shall run up the center of the panel, unless otherwise indicated, and shall have connected thereto the various branch circuits. Unless otherwise specified, bus bars for each panel board shall be equipped with main lugs only and capacity as required on Contract Drawings. Where main protection is required, automatic circuit breakers shall be used. A neutral bus of at least the same capacity as a live bus bar shall be provided for the connection of all neutral conductors. Each terminal shall be identified. All current carrying parts, exclusive of circuit breakers, shall be of copper with a minimum number of joints. The bus bar structure shall be a self-supporting unit, firmly fastened to a ½



inch plastic board, extending the full length and width of assembly which shall serve to insulate the bus structure from the back of panel box. Other methods affording equally effective bus structure support and insulation will be given consideration. An insulating barrier shall separate neutral bus from other parts of panel.

- D. **CIRCUIT BREAKER ASSEMBLY:** The entire circuit breaker and bus bar assembly shall be mounted on an adjustable metal base or pan and secured to the back of panel box. The panel shall have edges flanged for rigidity.
- E. **PANEL MOUNTING:** The panel shall be centered in the panel box to line up with door openings and set level and plumb so that no live parts are exposed with the door open.
- F. **PANEL CABINET:**
1. **PANEL CABINET INSTALLATION:** When installed surface mounted in panel closets they shall be mounted on Kindorf channel.
 2. Where cabinets cannot be set entirely flush due to shallow walls or partitions or where cabinet is extra deep, the protruding sides of cabinet shall be trimmed with a metal or hardwood return molding of approved design and fastened to cabinet so as to conceal the intersection between the wall and cabinet.
- G. **NAMEPLATES:** Nameplates where required, shall be made of engraved Lamicoid sheet, or approved equal. Letters and numbers shall be engraved white on a black background (except for Firehouse projects which shall have white letters on a red background). The Contractor shall submit an engraved sample for approval as to design and style of lettering before proceeding with the manufacture of the nameplate. Nameplates shall be of suitable size and shall also be provided at the top of the switchboard or section thereof and on the trim at the top of all lighting and power panels. Similar nameplates shall also be provided for each distribution circuit breaker giving the breaker number, the number of the feeder, and the name of the equipment fed.
- H. **SHOP DRAWINGS:** showing all details of boxes, panels, etc., shall be submitted for approval.
- I. **DIRECTORIES:** A directory shall be fastened with brass screws and consist of a noncorrosive metal frame with dimensions not less than five (5) inches x eight (8) inches and a transparent window of Plasticile, Plexiglass, Lucite, Polycarbonate or approved equal that is not less than 1/16 inch thick over cardboard or heavy paper. The directory shall be typewritten and show the number of each circuit, the name of circuit and lighting or equipment supplied. The size of riser feeder shall be as indicated on directory. The dimensions of directory shall be submitted for approval for each size of panel.
- J. **CONSTRUCTION**
1. **FINISH:** Panel boxes, doors and trim for installation in dry locations, shall be zinc coated after fabrication by the hot-dip galvanizing or electroplate process on inside and outside surfaces. In damp locations, panel boards shall be enclosed and gasketed NEMA 3R type. Panel boards located outdoors or exposed to the weather shall be NEMA 3X type.
 2. **PAINTING:** Panel boxes, doors and trim shall receive a coat of approved priming paint and a second coat of approved paint in the field after installation. Paint shall be applied to the inside and outside of boxes and on both sides of trim. Panel trims and doors shall receive a third or finishing coat on the outside after installation. Approval as to texture and color must be obtained before the final coat is applied.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.7

3.7 MOTORS:

This Section sets forth the general design, construction and performance requirements, which shall apply to all motors furnished in the Contract.

- A. **MOTOR DESIGN:** All motors shall be designed to comply with the New York State Energy Conservation Construction Code and the New York City Energy Conservation Code. In the event of any conflict or inconsistency between such codes, the New York City Energy Conservation Code shall prevail. Motors shall have standard NEMA frames and shall have nameplate ratings adequate to meet the specified conditions of operation. Motor performance under variable conditions of voltage and frequency shall be within the limits set in NEMA standards, unless modified in the Specifications. Motors shall be expressly designed for the hazard duty load, voltage and frequency as specified in the Contract. All motor windings shall be copper. All motors intended to operate on a 208 volt system shall be designed and rated for 200 volts.
- B. **STANDARDS OF COMPARISON:** In the absence of specific motor specifications, in general, the best standard products of the leading motor manufacturers shall be considered as a standard for comparison. The requirements of the NEMA standards for motors and generators shall be deemed to contain the minimum requirements of performance and design.
- C. **OBJECTIONABLE NOISES:** Objectionable noises will not be tolerated and exceptionally quiet motors may be required for certain specified locations. Noise control tests as per the New York City Construction Codes may be performed as directed by the Commissioner. Such motors shall bear a nameplate lettered "Quiet Motor." Springs and slip rings shall be of approved non-ferrous material.
- D. **BEARINGS:**
1. Bearings, unless specified otherwise, shall be of the ball or roller type. Motors one (1) horsepower and larger that are equipped with ball roller bearings shall also have lubrication of the pressure-relief greasing type. The Contractor furnishing four (4) or more such motors shall also furnish, as part of the Contract, a pressure grease gun of rugged design, of approximately 10 ounce capacity, complete with necessary adapters. The Contractor shall also provide 10 pounds of approved gun grease.
 2. For any particular unit where sleeve bearings are deemed desirable, permission for their use may be granted by the Commissioner. Motors one (1) horsepower and larger that are equipped with sleeve type bearings shall in addition to having protected accessible fittings for oiling be provided with visible means for determining normal oil level. Lubrication shall be positive, automatic and continuous.
- E. **MOTOR TERMINALS AND BOXES:** Each motor shall be furnished with flexible leads of sufficient length to extend for a distance of not less than three (3) inches beyond the face of the conduit terminal box. This box shall be furnished of ample size to make and house motor connections. These requirements shall be met irrespective of any other standards or practices. Size of cable terminals and conduit terminal box holes shall be subject to approval. For motors five (5) horsepower or larger, each terminal shall come with two (2) cast or forged copper pressure type connectors with bolts, nuts and washers. For motors of smaller ratings, connectors of other acceptable types may be furnished. For installations exposed to the weather or moist locations, terminal boxes shall be of cast iron with threaded hubs and gasketed covers. Cover screws shall be of non-corrosive material.
- F. **MOTOR TEMPERATURE RISES:** The motor nameplate temperature rises for the various types of motor enclosures shall be as listed below:
- | | |
|---|---------------|
| 1. Open Frame | 40 degrees C. |
| 2. Totally enclosed and enclosed fan cooled | 55 degrees C. |



3. Explosion proof and submersible 55 degrees C.
4. Partially enclosed and drip proof 40 degrees C.

The temperature of the various parts of a motor shall meet the requirements of NEMA standards for the size and type of the motors. Tests for heating shall be made by loading the motor to its rated horsepower and keeping it so loaded for the rated time interval or until the temperature becomes constant.

- G. **SPECIAL CODE INSTALLATIONS:** Electrical installations covered by special publications of NBFU and by special City rulings and regulations shall comply in design and safety features with such applicable codes, regulations and rulings, and shall be furnished and installed complete with all accessories and safety devices as therein specified.
- H. **MOTORS ON LIGHTING PANELS:** The largest A.C. motor permitted on branch circuits of lighting panels shall not exceed 1/4 horsepower.
- I. **MOTORS RATED:** ½ horsepower and larger shall be polyphase.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8

3.8 MOTOR CONTROL EQUIPMENT:

This Section sets forth the requirements for motor controllers and associated devices. Such requirements are applicable to all motor control equipment furnished or installed.

- A. **MANUFACTURER:** All control equipment furnished under the Contract shall be the product of a single manufacturer. Exceptions to this rule may be granted in the case of controllers for fractional horsepower motors driving special equipment, the various units of which have been engineered to obtain specific performance.
- B. **CONTROL ITEMS REQUIRED:** The Contractor furnishing motors shall also furnish therewith complete disconnecting, starting and control equipment as required by the detailed Specifications, the various code authorities and for the successful operation of the driven equipment. These items include circuit breaker, magnetic starter with overload protection and low voltage release or protection, push button stations, pilot lights and alarms, float, pressure, temperature and limit switches, load transfer switches, devices for manual operation and speed controllers, etc. The Contractor shall furnish as many of these items as are required for the successful operation of the driven unit.
 1. Where a motor is to be located out of sight of the controller, the Contractor shall furnish an approved disconnecting means to be mounted near motor.
- C. **TYPES OF STARTERS:**
 1. **SQUIRREL CAGE:** A.C. motors of the squirrel cage type, rated from one (1) to 30 horsepower, shall have magnetic across the line starters; motors rated above 30 horsepower shall be furnished with reduced voltage (autotransformer type) starter or part winding start with time delay to reduce inrush current. Size of starters shall be based on 200V operation.
 2. **SLIP RING:** A.C. Motors of the slip-ring type shall be furnished with primary across the line starters interlocked with secondary starting and regulating equipment. The interlocking feature shall prevent starting of the motor when the secondary controller is off the initial starting point.
 3. **MAGNETIC:** For fractional horsepower motors, magnetic type starters are not required unless the particular method of controlling the driven equipment makes them necessary. Where individual single phase fractional horsepower motors or the sum of fractional horsepower motors controlled by an automatic device are ½ horsepower or more, magnetic starters and circuit breakers shall be used. Single phase A.C. motors smaller than ½ horsepower or three-phase A.C. motors smaller than one (1) horsepower where manual control is specified may be furnished with starters of toggle



switch or push button type with inbuilt thermal protection. No additional disconnecting means is required to be furnished with this type of starter. This type of starter may also be used in series with automatic control devices such as thermostats, float and pressure switches, provided the individual motor or the sum of fractional horsepower motors is less than ½ horsepower. Means for manual operation shall be provided.

- D. **DISCONNECTING BREAKER:** All motor starters, unless otherwise specified, shall be provided with a disconnecting means in the form of a circuit breaker of the type specified under Article 3.5 **CIRCUIT PROTECTIVE DEVICES**. This disconnecting means shall be contained in the same housing with the starter and shall be operable from outside. Means shall be provided for locking the handle of the circuit breaker in the "OFF" position if it is desired to take the equipment out of service and prevent unauthorized starting.
- E. **CONTROL CABINET: DRY LOCATIONS -** All starters shall be furnished with general purpose, NEMA Type 1, sheet metal enclosures with hinged covers and baked enamel finish.
- F. **CONTROL CABINET – WATERTIGHT:** In wet locations, cast iron watertight enclosures with threaded hubs, galvanized and gasketed hinged covers shall be provided.
- G. 1. **PANELS:** Motor control devices and appliances shall be mounted on approved insulating slabs with all wiring and connections made on the back of the slabs.
2. **WIRING AND TERMINALS:** Wiring connections for currents of 100 Amperes or less may be made with copper wire or cable with special flameproof insulating coverings. Such wires shall be installed in a neat workmanlike manner, flat against the slab, and held in place by clips. Connections shall be made with pressure connectors for No. 8 AWG and larger wires, and with grommets for small stranded wires. Except for incoming and outgoing main leads, all connections shall terminate on approved connector blocks, which may be installed on the face of the slab. For small, across the line starters, the above requirements may be modified if satisfactory connections are provided.
3. **COPPER BUS:** For currents exceeding 100 Amperes, copper bus shall be used in place of wires. The bus shall be constructed of copper rods, tubing or flat strap, bent and shaped properly and securely attached to the slab in a neat and workmanlike manner. The cross section of copper shall provide sufficient areas to keep current density at not more than 1,000 Amperes per square inch.
- H. **COOPERATION:** The Contractor's subcontractor(s) who furnish electrically operated equipment shall give to the Contractor and the Contractor's electrical subcontractor full information relative to sizes and locations of apparatus furnished by them which require electrical connections.
- I. **SPARE PARTS:**
1. **FURNISH:** The Contractor shall furnish the following spare parts pertaining to equipment furnished by each subcontractor.
- One (1) set of contact fingers and springs and thermal elements for each three (3) (or fraction) of each size of magnetic contactor starter.
- One (1) holding coil for each three (3) (or fraction) of each size of magnetic contactor starter.
2. **WRAPPER MARKING:** All parts shall be delivered to the Resident Engineer neatly wrapped and boxed and plainly tagged and marked for identification and reordering.

END OF SECTION 01 35 06



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text



SECTION 01 35 26
SAFETY REQUIREMENTS PROCEDURES

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Safety and Health Requirements, including:
 - 1. Definitions
 - 2. Required Safety Meeting
 - 3. Compliance with Regulations
 - 4. Submittals
 - 5. Personnel Protective Equipment
 - 6. Hazardous Materials
 - 7. Emergency Suspension of Work
 - 8. Protection of Personnel
 - 9. Environmental Protection

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 REQUIRED SAFETY MEETINGS:

- A. Prior to commencing construction, the Resident Engineer will schedule and hold a preconstruction kick-off meeting either at DDC's main office or at the Project site with representatives of the Contractor, including the principal on-site project representative and one or more safety representatives, Commissioner's designated representatives and other concerned parties for the purpose of reviewing the Contract Safety requirements. The Contractor's safety requirements shall be reviewed, and implementation of safety provisions pertinent to the Work shall be discussed.
- B. The Contractor is responsible for conducting weekly documented jobsite safety meetings, given to all jobsite personnel including all subcontractors on the project, with the purpose of discussing safety topics and job specific requirements at the DDC worksite.



1.5 COMPLIANCE WITH REGULATIONS:

- A. The Work, including contact with or handling of hazardous materials, disturbance or dismantling of structures containing hazardous materials, and disposal of hazardous materials, shall comply with the applicable requirement for CFR Parts 1910 and 1926, and 40 CFR, Parts 61, 261, 761 and 763.
- B. Work involving disturbance or dismantling of asbestos or asbestos containing materials, demolition of structures containing asbestos and removal of asbestos, shall comply with 40 CFR Part 61, Subparts A and M, and 40 CFR Part 763, as applicable.
- C. Work shall additionally comply with all applicable federal, state and local safety and health regulations.
- D. In case of a conflict between applicable regulations, the more stringent requirements shall apply.
- E. All workers working on the DDC project site are required by NYC Local Law 41 to complete the OSHA 10 –hour training course.

1.6 SUBMITTALS:

- A. The Contractor shall submit, to the Resident Engineer, copies of the Safety Program, Site Safety Plan and other required documentation in accordance with the *“New York City Department of Design and Construction Safety Requirements.”*
- B. Permits: If hazardous materials are disposed of off-site submit copies of shipping manifests and permits from applicable federal, state or local authorities and disposal facilities, and submit certificates that the material has been disposed of in accordance with regulations to the Resident Engineer.
- C. Accident Reporting: Submit a copy of each accident report to the Resident Engineer in accordance with the *“New York City Department of Design and Construction Safety Requirements.”*
- D. All Asbestos and Lead project regulatory notifications are to be submitted to DDC’s Bureau of Environmental and Geotechnical Services (BEGS) through the Resident Engineer.
- E. Request for Subcontractor Approval: Any subcontractor performing environmental work shall submit required documentation for approval to perform such work as required by DDC’s BEGS.

PART II – PRODUCTS

2.1 PERSONNEL PROTECTIVE EQUIPMENT:

Special facilities, devices, equipment and similar items used by the Contractor in execution of the Work shall comply with 29 CFR Part 1910, subpart I, Part 1926, subpart E and other applicable regulations.

2.2 HAZARDOUS MATERIALS:

- A. The Contractor shall bring to the attention of the Commissioner, any material encountered during execution of the Work that the Contractor suspects to be hazardous.
- B. The Commissioner shall determine whether the Contractor shall perform tests to determine if the material is hazardous. A change to the Contract price may be provided, subject to the applicable provisions of the Contract.
- C. If the material is found to be hazardous, the Commissioner may direct the Contractor to remediate the hazard and a change to the Contract price may be provided, subject to the applicable provisions of the Contract.



PART III – EXECUTION

3.1 EMERGENCY SUSPENSION OF WORK:

- A. When the Contractor is notified by the Commissioner of noncompliance with the safety provisions of the Contract, the Contractor shall immediately, unless otherwise instructed, correct the unsafe condition, at no additional cost to the City.
- B. If the Contractor fails to comply promptly, all or part of the Work may be stopped by notice from the Commissioner.
- C. When, in the opinion of the Commissioner, the Contractor has taken satisfactory corrective action, the Commissioner shall provide written notice to the Contractor that work may resume.
- D. The Contractor shall not be allowed any extension of time or compensation for damages in connection with a work stoppage for an unsafe condition.

3.2 PROTECTION OF PERSONNEL:

- A. The Contractor shall take all necessary precautions to prevent injury to the public, occupants, or damage to property of others. The public and occupants includes all persons not employed by the Contractor or a subcontractor.
- B. Whenever practical, the work area shall be fenced, barricaded or otherwise blocked off from the Public or occupants to prevent unauthorized entry into the work area, in compliance with the requirements of Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS, and including, without limitation, the following:
 - 1. Provide traffic barricades and traffic control signage where construction activities occur in vehicular areas.
 - 2. Corridors, aisles, stairways, doors and exit ways shall not be obstructed or used in a manner to encroach upon routes of ingress or egress utilized by the public or occupants, or to present an unsafe condition to the public or occupants.
 - 3. Store, position and use equipment, tools, materials, scraps and trash in a manner that does not present a hazard to the public or occupant by accidental shifting, ignition or other hazardous activity.
 - 4. Store and transport refuse and debris in a manner to prevent unsafe and unhealthy conditions for the public and occupants. Cover refuse containers, and remove refuse on a frequent regular basis acceptable to the Resident Engineer. Use tarpaulins or other means to prevent loose transported materials from dropping from trucks or other vehicles.

3.3 ENVIRONMENTAL PROTECTION:

- A. Dispose of solid, liquid and gaseous contaminants in accordance with local codes, laws, ordinances and regulations.
- B. Comply with applicable federal, state and local noise control laws, ordinances and regulations, including but not limited to 29 CFR 1910.95, 29 CFR 1926.52 and NYC Administrative Code Chapter 28 of Title 15.

END OF SECTION 01 35 26



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

No Text

**SECTION 01 35 91
HISTORIC TREATMENT PROCEDURES**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 91

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for the treatment of Landmark Structures and Landmark Quality Structures, as identified in the Addendum. Specific requirements are indicated in other sections of the Specifications.
- B. This Section includes, without limitation, the following:
1. Storage and protection of existing historic materials
 2. Temporary protection of historic materials during construction
 3. General Protection
 4. Protection during use of heat-generating equipment
 5. Photographic Documentation
 6. NYC Landmarks Preservation Commission Final Approval signoffs

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- C. Section 01 33 00 SUBMITTAL PROCEDURES
- D. Section 01 77 00 CLOSEOUT PROCEDURES
- E. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Landmark Structure or Site: Any building or site which has been designated as a landmark, or any building or site within a landmark district, as designated by the New York City Preservation Commission or the New York State Historic Preservation Office.



- D. **Landmark Quality Structure:** Any building which has been determined by the City to be of landmark quality and/or historical significance.
- E. **Preservation:** To apply measures necessary to sustain the existing form, integrity, and materials of a historic property. Work may include preliminary measures to protect and stabilize the property.
- F. **Rehabilitation:** To make possible a compatible use for a property through repair, alterations, and additions while preserving those portions or features that convey its historical, cultural, or architectural values.
- G. **Restoration:** To accurately depict the form, features, and character of a property as it appeared at a particular period of time by means of the removal of features from other periods in its history and the reconstruction of missing features from the restoration period.
- H. **Reconstruction:** To reproduce in the exact form and detail a building, structure, or artifact as it appeared at a specific period in time.
- I. **Stabilize:** To apply measures designed to reestablish a weather-resistant enclosure and the structural reinforcement of an item or portion of the building while maintaining the essential form as it exists at present.
- J. **Protect and Maintain:** To remove deteriorating corrosion, reapply protective coatings, and install protective measures such as temporary guards; to provide the least degree of intervention.
- K. **Repair:** To stabilize, consolidate, or conserve; to retain existing materials and features while employing as little new material as possible. Repair includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials. Within restoration, repair also includes limited replacement in kind, rehabilitation, and reconstruction, with compatible substitute materials for deteriorated or missing parts of features when there are surviving prototypes.
- L. **Replace:** To duplicate and replace entire features with new material in kind. Replacement includes the following conditions:
 - 1. **Duplication:** Includes replacing elements damaged beyond repair or missing. Original material is indicated as the pattern for creating new duplicated elements.
 - 2. **Replacement with New Materials:** Includes replacement with new material when original material is not available as patterns for creating new duplicated elements.
 - 3. **Replacement with Substitute Materials:** Includes replacement with compatible substitute materials. Substitute materials are not allowed, unless otherwise indicated.
- M. **Remove:** To detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- N. **Remove and Salvage:** To detach items from existing construction and deliver them to the City ready for reuse.
- O. **Remove and Reinstall:** To detach items from existing construction, repair and clean them for reuse, and reinstall them where indicated.
- P. **Existing to Remain or Retain:** Existing items of construction that are not to be removed and that are not otherwise indicated to be removed and salvaged, or removed and reinstalled.



- Q. Material in Kind: Material that matches existing materials, as much as possible, in species, cut, color, grain, and finish.

1.5 SUBMITTALS:

- A. Historic Treatment Program: Submit a written plan for each phase or process, including protection of surrounding materials during operations. Describe in detail materials, methods, and equipment to be used for each phase of work.
- B. Alternative Methods and Materials: If alternative methods and materials to those indicated are proposed for any phase of work, submit for Commissioner's approval a written description including evidence of successful use on other comparable projects, and program of testing to demonstrate effectiveness for use on this Project.
- C. Qualification Data: For historic treatment specialists as specified and required by individual sections of the project specifications.
- D. Photographs for Designated Landmark Structures: Submit photographs in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION and as described in this section.
- E. Record Documents: Include modifications to manufacturer's written instructions and procedures, as documented in the historic treatment preconstruction conference and as the Work progresses.

1.6 QUALITY ASSURANCE:

- A. Special Experience Requirements: Special Experience Requirements may apply to the firm that will provide Historic Treatment Services. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- B. Historic Treatment Preconstruction Conference: The Resident Engineer will schedule and hold a preconstruction meeting at the site in accordance with Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION.
1. Review manufacturer's written instructions for precautions and effects of products and procedures on building materials, components, and vegetation.
 - a. Record procedures established as a result of the review and distribute to affected parties.

1.7 STORAGE AND PROTECTION OF HISTORIC MATERIALS:

- A. Removed and Salvaged Historic Materials: As specified and required by individual sections of the project specifications.
- B. Removed and Reinstalled Historic Materials: As specified and required by individual sections of the project specifications.
- C. Existing Historic Materials to Remain: Protect construction indicated to remain against damage and soiling during historic treatment. When permitted by the Commissioner, items may be removed to a suitable, protected storage location during historic treatment and reinstalled in their original locations after historic treatment operations are complete.
- D. Storage and Protection: When removed from their existing location, store historic materials, at a location acceptable to the Commissioner, within a weather tight enclosure where they are protected from wetting by rain, snow, or ground water, and temperature variations. Secure stored materials to protect from theft.
1. Identify removed items with an inconspicuous mark indicating their original location.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 PROTECTION, GENERAL:

- A. Comply with manufacturer's written instructions for precautions and effects of products and procedures on adjacent building materials, components, and vegetation.
- B. Ensure that supervisory personnel are present when work begins and during its progress.
- C. Temporary Protection of Historic Materials during Construction:
 - 1. Protect existing materials during installation of temporary protections and construction. Do not deface or remove existing materials.
 - 2. Attachments of temporary protection to existing construction shall be approved by the Commissioner prior to installation.
- D. Protect landscape work adjacent to or within work areas as follows:
 - 1. Provide barriers to protect tree trunks.
 - 2. Bind spreading shrubs.
 - 3. Use coverings that allow plants to breathe and remove coverings at the end of each day. Do not cover plant material with a waterproof membrane for more than 8 hours at a time.
 - 4. Set scaffolding and ladder legs away from plants.
- E. Existing Drains: Prior to the start of work or any cleaning operations, test drains and other water removal systems to ensure that drains and systems are functioning properly. Notify Commissioner immediately of drains or systems that are stopped or blocked. Do not begin Work of this Section until the drains are in working order.
 - 1. Provide a method to prevent solids, including stone or mortar residue, from entering the drains or drain lines. Clean out drains and drain lines that become blocked or filled by sand or any other solids because of work performed under this Contract.
 - 2. Protect storm drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.

3.2 PROTECTION DURING USE OF HEAT-GENERATING EQUIPMENT:

- A. No roofing work requiring the use of an open flame shall be permitted on any Landmark Structure or any Landmark Quality Structure, whose roof or wall structure is made of wood or primarily of wood.
- B. Comply with the following procedures while performing work with heat-generating equipment, including welding, cutting, soldering, brazing, paint removal with heat, and other operations where open flames or implements utilizing heat are used:
 - 1. Obtain Commissioner's approval for operations involving use of open-flame or welding equipment. Notification shall be given for each occurrence and location of work with heat-generating equipment.
 - 2. As far as practical, use heat-generating equipment in shop areas or outside the building.
 - 3. Before work with heat-generating equipment commences, furnish personnel to serve as a fire watch (or watches) for location(s) where work is to be performed.



4. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
 5. Remove and keep the area free of combustibles, including, rubbish, paper, waste, etc., within area of operations.
 6. If combustible material cannot be removed, provide fireproof blankets to cover such materials.
 7. Where possible, furnish and use baffles of metal or gypsum board to prevent the spraying of sparks or hot slag into surrounding combustible material.
 8. Prevent the extension of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
 9. Inspect each location of the day's work not sooner than 30 minutes after completion of operations to detect hidden or smoldering fires and to ensure that proper housekeeping is maintained.
- C. Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to automatic sprinkler heads, shield the individual heads temporarily with guards.

3.3 PHOTOGRAPHIC DOCUMENTATION:

Photographs for Designated Landmark Structures: Show existing conditions prior to any historic treatments, including one overall photograph and two close-up photographs of all areas of work affected. Show one overall photograph and two close-up photographs of all areas of work after the successful execution of all historical treatments.

3.4 NEW YORK CITY LANDMARKS PRESERVATION COMMISSION FINAL APPROVALS SIGNOFF:

For all projects involving a Landmark Structure or Site, the Contractor, at the completion of the work, shall submit to the Commissioner, in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS, all documentation concerning the successful execution of all historic treatments. This shall include, but not be limited to, copies of all before and after photographs of historic treatments, one copy of the Contractor's as-built drawings, copies of testing and analysis results, including cleaning, mortar analysis, pointing mortars and all other information pertaining to work performed under the New York City Landmarks Preservation Commission jurisdiction.

END OF SECTION 01 35 91



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text



SECTION 01 40 00
QUALITY REQUIREMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes the following:
- a. Definitions
 - b. Conflicting Requirements
 - c. Quality Assurance
 - d. Quality Control
 - e. Approval of Materials
 - f. Special Inspections (Controlled Inspection)
 - g. Inspections by Other City Agencies
 - h. Certificates of Approval
 - i. Acceptance Tests
 - j. Repair and Protection
- B. This Section includes administrative and procedural requirements for quality control to assure compliance with quality requirements specified in the Contract Documents.
- C. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
- D. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
- E. Provisions of this Section do not limit requirements for the Contractor to provide quality-assurance and -control services required by the Commissioner or authorities having jurisdiction.
- F. Specific test and inspection requirements are specified in the individual sections of the Specifications.
- G. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- H. COMMISSIONING: Refer to the Addendum to identify whether this project will be Commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.



1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioning: A Total Quality Assurance process that includes checking the design and installation of equipment, as well as performing functional testing of the same to confirm that the installed equipment is operating and in conformance with the Contract Documents and the City's requirements.

1.5 CONFLICTING REQUIREMENTS:

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, the Contractor shall comply with the most stringent requirement as determined by the Commissioner. The Contractor shall refer any uncertainties and/or conflicting requirements to the Commissioner for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. The Contractor shall refer any uncertainties to the Commissioner for a decision before proceeding.

1.6 QUALITY ASSURANCE:

- A. General: Qualifications paragraphs in this Article establish the minimum qualification levels required. Individual Specification Sections specify additional requirements.
- B. Installer Qualifications: Special Experience Requirements may apply to the firm that will install, erect or assemble specified work required for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- C. Manufacturer Qualifications: Special Experience Requirements may apply to the firm that will manufacture equipment, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.

- D. Fabricator Qualifications: Special Experience Requirements may apply to the firm that will fabricate material, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- E. Professional Engineer Qualifications: A professional engineer who is licensed to practice in the State of New York and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or products that are similar to those indicated for this Project in material, design, and extent.
- F. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- G. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
 - 1. Build mockups in location and of size indicated or, if not indicated, as directed by the Resident Engineer.
 - 2. Notify Resident Engineer seven (7) days in advance of dates and times when mockups will be constructed.
 - 3. Demonstrate the proposed range of aesthetic effects and workmanship.
 - 4. Obtain Design Consultant's approval of mockups before starting work, fabrication, or construction.
 - 5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 - 6. Demolish and remove mockups when directed, unless otherwise directed or indicated.

1.7 QUALITY CONTROL:

- A. City's Responsibilities: Where quality-control services are indicated as the City's responsibility in the Specifications, the City will engage a qualified testing agency to perform these services.
 - 1. COST OF TESTS BORNE BY THE CITY: Where the City directs tests to be performed to determine compliance with the Specifications regarding materials or equipment, and where such compliance is ascertained as a result thereof, the City will bear the cost of such tests.
 - 2. The City will furnish the Contractor with names, addresses, and telephone numbers of testing entities engaged and a description of the types of testing and inspecting they are engaged to perform.
 - 3. Costs for retesting and re-inspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to the Contractor.
- B. Contractor's Responsibility: Tests and inspections not explicitly assigned to the City are the Contractor's responsibility. Unless otherwise indicated, the Contractor shall provide quality-control services as set forth in the Specifications and those required by Authorities having jurisdiction. The Contractor shall provide quality-control services required by Authorities having jurisdiction, whether specified or not.
 - 1. COST OF TESTS BORNE BY CONTRACTOR – In the case of tests which are specifically called for in the Specifications to be provided by the Contractor or tests which are required by any Authority having jurisdiction, but are not indicated as the responsibility of the City, the cost thereof shall be borne by the Contractor and shall be deemed to be included in the Contract price. The Contractor shall reimburse the City for expenditures incurred in providing tests on materials and equipment submitted by the Contractor as the equivalent of that specifically named in the Specifications and rejected for non-compliance.
 - 2. Where services are indicated as Contractor's responsibility, the Contractor shall engage a qualified testing agency to perform these quality-control services. Any testing agency engaged by the Contractor to perform quality control services is subject to prior approval by the Commissioner.



3. The Contractor shall not employ same entity engaged by the City, unless agreed to in writing by the Commissioner.
 4. The Contractor shall notify testing agencies and the Resident Engineer at least 72 hours in advance of the date and time for the performance of Work that requires testing or inspecting.
 5. Where quality-control services are indicated as Contractor's responsibility, the Contractor shall submit a certified written report, in triplicate to the Commissioner, of each quality-control service.
 6. Testing and inspecting requested by the Contractor and not required by the Contract Documents are Contractor's responsibility.
 7. The Contractor shall submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, the Contractor shall engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Results shall be submitted in writing as specified in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. **Retesting/Re-inspecting:** Regardless of whether the original tests or inspections were the Contractor's responsibility, the Contractor shall provide quality-control services, including retesting and re-inspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. **Associated Services:** The Contractor shall cooperate with entities performing required tests, inspections, and similar quality-control services, and shall provide reasonable auxiliary services as requested. The Contractor shall notify the testing agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist testing entity in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing entities.
 6. Design mix proposed for use for material mixes that require control by the testing entity.
 7. Security and protection for samples and for testing and inspecting equipment at the Project site.
- F. **Coordination:** Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
 2. Coordinate and cooperate with the Commissioning Authority/Agent as applicable for start-up, inspection and functional testing in the implementation of the Commissioning Plan.
- G. **Manufacturer's Directions:** Where the Specifications provide that the manufacturer's directions are to be used, such printed directions shall be submitted to the Commissioner.
- H. **Inspection of Material:** In the event that the Specifications require the Contractor to engage the services of an entity to witness and inspect any material especially manufactured or prepared for use in or part of the permanent construction, such entity shall be subject to prior written approval by the Commissioner.
1. **NOTICE** - The Contractor shall give notice in writing to the Commissioner sufficiently in advance of its intention to commence the manufacture or preparation of materials especially manufactured or prepared for use in or as part of the permanent construction. Such notice shall contain a request for inspection, the date of commencement and the expected date of completion of the manufacture or preparation of materials. Upon receipt of such notice, the Commissioner will arrange to have a representative present at such times during the manufacture as may be necessary to inspect the materials, or the Commissioner will notify the Contractor that the inspection will be made at a point



other than the point of manufacture, or the Commissioner will notify the Contractor that inspection will be waived.

- I. No Shipping Before Inspection: The Contractor shall comply with the foregoing before shipping any material.
- J. Certificate of Manufacture: When the Commissioner so requires, the Contractor shall furnish to the Commissioner authoritative evidence in the form of Certificates of Manufacture that the materials to be used in the work have been manufactured and tested in conformity with the Specifications. These certificates shall include copies of the results of physical tests and chemical analyses where necessary, that have been made directly on the product, or on similar products being fabricated by the manufacturer. This may include such approvals as B.S.A., M.E.A., B.E.C. Advisory Board, etc.
- K. Acceptance: When materials or manufactured products shall comprise such quantity that it is not practical to make physical tests or chemical analyses directly on the product furnished, a certificate stating the results of such tests or analyses of similar materials which were concurrently produced may, at the discretion of the Commissioner, be considered as the basis for the acceptance of such material or manufactured product.
- L. Testing Compliance: The testing personnel shall make the necessary inspections and tests, and the reports thereof shall be in such form as will facilitate checking to determine compliance with the Specifications, indicating thereon all analyses and/or test data and interpreted results thereof.
- M. Reports: Six (6) copies of the reports shall be submitted and authoritative certification thereof must be furnished to the Commissioner as a prerequisite for the acceptance of any material or equipment.
- N. Rejections: If, in making any test, it is ascertained by the Commissioner that the material or equipment does not comply with the Specifications, the Contractor will be notified thereof, and will be directed to refrain from delivering said materials or equipment, or to promptly remove it from the site or from the work and replace it with acceptable material at no additional cost to the City.
- O. Furnish Designated Materials: Upon rejection of any material or equipment submitted as the equivalent of that specifically named in the Specifications, the Contractor shall immediately proceed to furnish the designated material or equipment.

1.8 APPROVAL OF MATERIALS:

- A. Local Laws: All materials, appliances and types or methods of construction shall be in accordance with the Specifications and shall in no event be less than that necessary to conform to the requirements of the New York City Construction Codes, Administrative Code and Charter of the City of New York.
- B. Approval of Manufacturer: The names of proposed manufacturers, material suppliers, and dealers who are to furnish materials, fixtures, equipment, appliances or other fittings shall be submitted to the Commissioner for approval, as early as possible, to afford proper review and analysis. No manufacturer will be approved for any materials to be furnished under the Contract unless it shall have a plant of ample capacity and shall have successfully produced similar products. All approvals of materials or equipment that are legally required by the New York City Construction Codes and other governing Authorities must be obtained prior to installation.
- C. All Materials: Fixtures, fittings, supplies and equipment furnished under the Contract shall be new and unused, except as approved by the Commissioner, and of standard first-grade quality and of the best workmanship and design. The City of New York encourages the use of recycled products where practical.
- D. INFORMATION TO SUPPLIERS - In asking for prices on materials under any item of the Contract, the Contractor shall provide the manufacturer or dealer with such complete information from the



Specifications and Contract Drawings as may in any case be necessary, and in every case the Contractor shall inform the manufacturer or dealer of all the General Conditions and requirements herein contained.

1.9 SPECIAL INSPECTIONS:

A. SPECIAL INSPECTIONS:

1. Inspection of selected materials, equipment, installation, fabrication, erection or placement of components and connections made during the progress of the Work to ensure compliance with the Contract Documents and provisions of the New York City Construction Codes, shall be made by a Special Inspector. The City of New York will retain the services of the Special Inspector and bear the costs for the performance of Special Inspections in compliance with NYC Construction Codes requirements or as additionally may be called for in the project specifications, except as noted below for Form TR-3: Technical Report for Concrete Design Mix. The Special Inspector shall be an entity compliant with the requirements of the New York City Construction Codes. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring special inspection.
2. Form TR3: Technical Report Concrete Design Mix: The contractor shall be responsible for, and bear all costs associated with the filing and securing of approvals, if any, for Form TR3: Technical Report Concrete Design Mix, including, but not limited to, engaging the services of a New York City licensed Concrete Testing Lab for the review and approval of concrete design mix, testing, signatures and professional seals, etc., compliant with NYC Department of Buildings requirements, for each concrete design mix.
3. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring Special Inspection. The contractor shall be responsible for, and bear related costs to assure that all construction or work shall remain accessible and exposed for inspection purposes until the required inspection is completed.
4. Inspections and tests performed under "Special Inspection" shall not relieve the Contractor of the responsibility to comply with the Contract Documents, and that there is no warranty given to the Contractor by the City of New York in connection with such inspection and tests or certifications made under "Special Inspections".
5. The contractor must coordinate with the Resident Engineer or DDC Project Manager to provide access and schedule the work for inspection by the Special Inspector.

1.10 INSPECTIONS BY OTHER CITY AGENCIES:

- A. Letter of Completion: Just prior to substantial completion of this Project, the Commissioner will file with the Department of Buildings, an application for a Letter of Completion or a Certificate of Occupancy for the structure.
- B. Final Inspections: In connection with the above mentioned application for a Letter of Completion or a Certificate of Occupancy and before certificates of final payments are issued, the Contractor will be required to arrange for all final inspections by the inspection staff of the Department of Buildings, Fire Department or other Governmental Agencies having jurisdiction, and secure all reports, sign offs, certificates, etc., by such inspection staff or other governmental agencies, in order that a Letter of Completion or Certificate of Occupancy can be issued promptly.

1.11 CERTIFICATES OF APPROVAL:

- A. Responsibility: The Contractor shall be responsible for and shall obtain all final approvals for the work installed under the Contract in the form of such certificates that are required by all governmental agencies having jurisdiction over the work of the Contract.
- B. Transmittal: All such certificates shall be forwarded to the Commissioner through the Resident Engineer.



1.12 ACCEPTANCE TESTS:

- A. Government Agencies: All equipment and appliances furnished and installed under the Contract shall conform to the requirements of the Specifications, and shall in no event be less than that necessary to comply with the minimum requirements of the law and all of the governmental agencies having jurisdiction.
- B. Notice of Tests: Whenever the Specifications and/or any governmental agency having jurisdiction requires the acceptance test, the Contractor shall give written notice to all concerned of the time when these tests will be conducted.
- C. Energy: The City will furnish all energy, fuel, water and light required for tests.
- D. Labor and Materials: The Contractor shall furnish labor and all other material and instruments necessary to conduct the acceptance tests at no additional cost to the City.
- E. Certificates: The final acceptance by the Commissioner shall be contingent upon the Contractor delivering to the Commissioner all necessary certificates evidencing compliance in every respect with the requirements of the regulatory agencies having jurisdiction.
- F. Results: If the results of tests and Special Inspections indicate that the material or procedures do not meet requirements as set forth on the Contract Drawings or in the Specifications or are otherwise unsatisfactory, the Contractor shall only proceed as directed by the Resident Engineer. Additional costs resulting from retesting, re-inspecting, replacing of material and/or damage to the work and any delay caused to the schedule shall be borne by the Contractor.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, the Contractor shall repair damaged construction and restore substrates and finishes.
 - 1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.

END OF SECTION 01 40 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text

QUALITY REQUIREMENTS

01 40 00 - 8

**SECTION 01 42 00
REFERENCES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 DEFINITIONS:

REFER TO THE ADDENDUM, Article IX, FOR ADDITIONAL DEFINITIONS AND REVISIONS TO THE CONTRACT AND SPECIFICATIONS

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. "APPROVED," ETC. - "Approved," "acceptable," "satisfactory," and words of similar import shall mean and intend approved, acceptable or satisfactory to the Commissioner.
- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- D. "DIRECTED," "REQUIRED," ETC.- Wherever reference is made in the Contract to the work or its performance, the terms "directed," "required," "permitted," "ordered," "designated," "prescribed," "determined," and words of similar import shall, unless expressed otherwise, imply the direction, requirements, permission, order, designation or prescription of the Commissioner.
- E. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings.



1.3 CODES, AGENCIES AND REGULATIONS:

A.D.A.A.G.	Americans with Disabilities Act (ADA) – Architectural Barriers Act (ABA)
B.G. & E.	Bureau of Gas and Electricity of the City of New York
B.S. & A.	New York City Board of Standards and Appeals
DOE	Department of Energy
E.C.C.C.N.Y.S.	Energy Conservation Construction Code of New York State
EPA	Environmental Protection Administration
N.Y.C.C.C.	New York City Construction Codes – includes: New York City Plumbing Code New York City Building Code New York City Mechanical Code New York City Fuel Gas Code
N.Y.S.D.O.L	New York State Department of Labor
N.Y.C.D.E.P	New York City Department of Environmental Protection
N.Y.C.E.C.	New York City Electrical Code
N.Y.C.E.C.C	New York City Energy Conservation Code
N.Y.C.F.C	New York City Fire Code
N.Y.S...D.E.C.	New York State Department of Environmental Conservation
O.S.H.A.	Occupational Safety & Health Administration

1.4 INDUSTRY STANDARDS:

- A. STANDARD REFERENCES – Unless otherwise specifically indicated in the Contract Documents, whenever reference is made to the furnishing of materials or testing thereof that conforms to the standards of any technical society, organization or body, it shall be construed to mean the latest standard, code, specification adopted and published by that technical society, organization or body, as of the date of the bid opening, Unless the provisions of the New York City Construction Codes adopts a different or earlier dated version of such standard.
- B. APPLICABILITY OF STANDARDS: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect, to the extent referenced, as if bound or copied directly into the Contract Documents. Such standards are made a part of the Contract Documents by reference.
- C. CONFLICTING REQUIREMENTS: Where compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantity or quality, comply with the most stringent requirements. Immediately refer uncertainties, and requirements that are different but apparently equal, to the Commissioner in writing for a decision before proceeding.
- D. STANDARD SPECIFICATIONS - When no reference is made to a code, standard or specification, the Standard Specifications of the ASTM or the AIEE, as the case may be, shall govern.
- E. REFERENCES - Reference to a technical society, organization or body may be made in the Specifications by abbreviations. Abbreviations and acronyms used in the Specifications and other Contract Documents mean the associated name. The following names are subject to change and are



believed, but are not assured, to be accurate and up-to-date as of the Issue Date of the Contract Documents.

AA	Aluminum Association, Inc. (The)
AAADM	American Association of Automatic Door Manufacturers
AABC	Associated Air Balance Council
AAMA	American Architectural Manufacturers Association
AASHTO	American Association of State Highway and Transportation Officials
AATCC	American Association of Textile Chemists and Colorists (The)
ABAA	Air Barrier Association of America
ABMA	American Bearing Manufacturers Association
ACI	ACI International (American Concrete Institute)
ACPA	American Concrete Pipe Association
AEIC	Association of Edison Illuminating Companies, Inc. (The)
AF&PA	American Forest & Paper Association
AGA	American Gas Association
AGC	Associated General Contractors of America (The)
AGMA	American Gear Manufacturer Association
AHA	American Hardboard Association (Now part of CPA)
AHAM	Association of Home Appliance Manufacturers
AI	Asphalt Institute
AIA	American Institute of Architects (The)
AIEE	American Institute of Electrical Engineers
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AITC	American Institute of Timber Construction
ALCA	Associated Landscape Contractors of America (Now PLANET - Professional Landcare Network)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

ALSc	American Lumber Standard Committee, Incorporated
ALI	Automotive Lift Institute
AMCA	Air Movement and Control Association International, Inc.
ANSI	American National Standards Institute
AOSA	Association of Official Seed Analysts, Inc.
APA	APA - The Engineered Wood Association
APA	Architectural Precast Association
API	American Petroleum Institute
ARI	Air-Conditioning & Refrigeration Institute
ARMA	Asphalt Roofing Manufacturers Association
ASA	American Standards Association
ASAE	American Society of Agricultural Engineers
ASCE/SEI	American Society of Civil Engineers, Structural Engineering Institute
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASSE	American Society of Sanitary Engineering
ASTM	ASTM International (American Society for Testing and Materials International)
AWCI	AWCI International (Association of the Wall and Ceiling Industry International)
AWCMA	American Window Covering Manufacturers Association (Now WCSC)
AWI	Architectural Woodwork Institute
AWPA	American Wood-Preservers' Association
AWSC	American Welding Society
AWWA	American Water Works Association
BHMA	Builders Hardware Manufacturers Association
BIA	Brick Industry Association (The)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

BICSI	BICSI
BIFMA	BIFMA International (Business and Institutional Furniture Manufacturer's Association International)
BISSC	Baking Industry Sanitation Standards Committee
CIBSE	Chartered Institute of Building Services Engineers
CCC	Carpet Cushion Council
CDA	Copper Development Association
CEA	Canadian Electricity Association
CFFA	Chemical Fabrics & Film Association, Inc.
CGA	Compressed Gas Association
CGSB	Canadian General Standards Board
CIMA	Cellulose Insulation Manufacturers Association
CIPRA	Cast Iron Pipe Research Association
CISCA	Ceilings & Interior Systems Construction Association
CISPI	Cast Iron Soil Pipe Institute
CLFMI	Chain Link Fence Manufacturers Institute
CPA	Composite Panel Association
CPPA	Corrugated Polyethylene Pipe Association
CPSC	Consumer Product Safety Commission
CRI	Carpet & Rug Institute (The)
CRSI	Concrete Reinforcing Steel Institute
CSA	Canadian Standards Association
CSI	Cast Stone Institute
CSI	Construction Specifications Institute (The)
CSSB	Cedar Shake & Shingle Bureau
CTI	Cooling Technology Institute (Formerly: Cooling Tower Institute)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

DASMA	Door and Access Systems Manufacturer's Association International
DHI	Door and Hardware Institute
DOC	U.S. Department of Commerce – National Institute of Standards and Technology
EIA	Electronic Industries Alliance
DOJ	U.S. department of Justice
EIMA	EIFS Industry Members Association
DOL	U.S. Department of labor
EJCDC	Engineers Joint Contract Documents Committee
DOTn	U.S. Department of Transportation
EN	European Committee of Standards
EJMA	Expansion Joint Manufacturers Association, Inc.
ESD	ESD Association
EVO	Efficiency Valuation Organization
FEME	Federal Emergency Management Agency
FIBA	Federation Internationale de Basketball Amateur (The International Basketball Federation)
FIVB	Federation Internationale de Volleyball (The International Volleyball Federation)
FMG	FM Global (Formerly: FM - Factory Mutual System)
FMRC	Factory Mutual Research (Now FMG)
FRSA	Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.
FSA	Fluid Sealing Association
FSC	Forest Stewardship Council
GA	Gypsum Association
GANA	Glass Association of North America
GRI	(Now GSI)
GS	Green Seal
GSI	Geosynthetic Institute



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

HI	Hydraulic Institute
HI	Hydronics Institute
HMMA	Hollow Metal Manufacturers Association (Part of NAAMM)
HPVA	Hardwood Plywood & Veneer Association
HPW	H. P. White Laboratory, Inc.
HUD	U.S. Department of Housing and Urban Development
IAPMO	International Association of Plumbing and Mechanical Officials
IAS	International Approval Services (Now CSA International)
IBF	International Badminton Federation
ICC	International Code Council, Inc.
ICEA	Insulated Cable Engineers Association, Inc.
ICRI	International Concrete Repair Institute, Inc.
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc. (The)
IESNA	Illuminating Engineering Society of North America
IEST	Institute of Environmental Sciences and Technology
IGCC	Insulating Glass Certification Council
IGMA	Insulating Glass Manufacturers Alliance
ILI	Indiana Limestone Institute of America, Inc.
ISO	International Organization for Standardization
ISSFA	International Solid Surface Fabricators Association
ITS	Intertek
ITU	International Telecommunication Union
KCMA	Kitchen Cabinet Manufacturers Association
LMA	Laminating Materials Association (Now part of CPA)
LPI	Lightning Protection Institute
MBMA	Metal Building Manufacturers Association



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION

SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

MFMA	Maple Flooring Manufacturers Association, Inc.
MFMA	Metal Framing Manufacturers Association
MH	Material Handling (Now MHIA)
MHIA	Material Handling Industry of America
MIA	Marble Institute of America
MPI	Master Painters Institute
MSS	Manufacturers Standardization Society of The Valve and Fittings Industry Inc.
NAAMM	National Association of Architectural Metal Manufacturers
NACE	NACE International (National Association of Corrosion Engineers International)
NADCA	National Air Duct Cleaners Association
NAGWS	National Association for Girls and Women in Sport
NAIMA	North American Insulation Manufacturers Association
NBGQA	National Building Granite Quarries Association, Inc.
NCAA	National Collegiate Athletic Association (The)
NCMA	National Concrete Masonry Association
NCPI	National Clay Pipe Institute
NCTA	National Cable & Telecommunications Association
NEBB	National Environmental Balancing Bureau
NECA	National Electrical Contractors Association
NeLMA	Northeastern Lumber Manufacturers' Association
NEMA	National Electrical Manufacturers Association
NETA	InterNational Electrical Testing Association
NFHS	National Federation of State High School Associations
NFPA	NFPA (National Fire Protection Association)
NFRC	National Fenestration Rating Council

REFERENCES

01 42 00 -8



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

NGA	National Glass Association
NHLA	National Hardwood Lumber Association
NLGA	National Lumber Grades Authority
NIS	National Institute of Standards and Technology
NOFMA	NOFMA: The Wood Flooring Manufacturers Association (Formerly: National Oak Flooring Manufacturers Association)
NRCA	National Roofing Contractors Association
NRMCA	National Ready Mixed Concrete Association
NSF	NSF International (National Sanitation Foundation International)
NSSGA	National Stone, Sand & Gravel Association
NTMA	National Terrazzo & Mosaic Association, Inc. (The)
NTRMA	National Tile Roofing Manufacturers Association (Now TRI)
NWWDA	National Wood Window and Door Association (Now WDMA)
OPL	Omega Point Laboratories, Inc. (Acquired by ITS - Intertek)
PCI	Precast / Pre-stressed Concrete Institute
PDCA	Painting & Decorating Contractors of America
PDI	Plumbing & Drainage Institute
PGI	PVC Geomembrane Institute
PLANET	Professional Landcare Network (Formerly: ACLA - Associated Landscape Contractors of America)
PPS	Power Piping Society
PTI	Post-Tensioning Institute
RCSC	Research Council on Structural Connections
RFCI	Resilient Floor Covering Institute
RIS	Redwood Inspection Service
RMI	Rack Manufacturers Institute
RTI	(Formerly: NTRMA - National Tile Roofing Manufacturers Association) (Now TRI)



SAE	SAE International
SCAQMD	South Coast Air Quality Management District
SCS	Scientific Certification System
SDI	Steel Deck Institute
SDI	Steel Door Institute
SEFA	Scientific Equipment and Furniture Association
SGCC	Safety Glazing Certification Council
SHBI	Steel Heating Boiler Institute
SIA	Security Industry Association
SIGMA	Sealed Insulating Glass Manufacturers Association (Now IGMA)
SJI	Steel Joist Institute
SMA	Screen Manufacturers Association
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association
SMPTE	Society of Motion Picture and Television Engineers
SPFA	Spray Polyurethane Foam Alliance (Formerly: SPI/SPFD - The Society of the Plastics Industry, Inc.; Spray Polyurethane Foam Division)
SPIB	Southern Pine Inspection Bureau (The)
SPRI	Single Ply Roofing Industry
SSINA	Specialty Steel Industry of North America
SSPC	SSPC: The Society for Protective Coatings
STI	Steel Tank Institute
SWI	Steel Window Institute
SWRI	Sealant, Waterproofing, & Restoration Institute
TCA	Tile Council of America, Inc.
TIA/EIA	Telecommunications Industry Association/Electronic Industries Alliance
TMS	The Masonry Society



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

TPI	Truss Plate Institute, Inc.
TPI	Turfgrass Producers International
TRI	Tile Roofing Institute (Formerly: RTI - Roof Tile Institute)
UL	Underwriters Laboratories Inc.
ULC	Underwriters Laboratories of Canada
UNI	Uni-Bell PVC Pipe Association
USAV	USA Volleyball
USC	United States Code
USGBC	U.S. Green Building Council
USITT	United States Institute for Theatre Technology, Inc.
WASTEC	Waste Equipment Technology Association
WCLIB	West Coast Lumber Inspection Bureau
WCMA	Window Covering Manufacturers Association (Now WCSC)
WCSC	Window Covering Safety Council (Formerly: WCMA - Window Covering Manufacturers Association)
WDMA	Window & Door Manufacturers Association (Formerly: NWWDA - National Wood Window and Door Association)
WI	Woodwork Institute (Formerly: WIC - Woodwork Institute of California)
WIC	Woodwork Institute of California (Now WI)
WMMPA	Wood Moulding & Millwork Producers Association
WRI	Wire Reinforcement Institute, Inc.
USEPA	United States Environmental Protection Agency
WSRCA	Western States Roofing Contractors Association
WWPA	Western Wood Products Association

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 42 00

REFERENCES
01 42 00 -11



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text

REFERENCES

01 42 00 -12

**SECTION 01 50 00
TEMPORARY FACILITIES, SERVICES AND CONTROLS**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
- a. Temporary Water System
 - b. Temporary Sanitary Facilities
 - c. Temporary Electric Power, Temporary Lighting System, And Site Security Lighting
 - d. Temporary Heat
 - e. Dewatering Facilities And Drains
 - f. Temporary Field Office for Contractor
 - g. Resident Engineer's Office
 - h. Material Sheds
 - i. Temporary Enclosures
 - j. Temporary Partitions
 - k. Temporary Fire Protection
 - l. Work Fence Enclosure
 - m. Rodent and Insect Control
 - n. Plant Pest Control Requirements
 - o. Project Identification Signage
 - p. Security Guards/Fire Guards on Site
 - q. Project Sign and Rendering
 - r. Safety

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 54 11 TEMPORARY ELEVATORS AND HOISTS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Permanent Enclosure: As determined by Commissioner, permanent or temporary roofing that is complete, insulated, and weather tight; exterior walls which are insulated and weather tight; and all openings that are closed with permanent construction or substantial temporary closures.



- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Reports: Submit reports of tests, inspections, meter readings and similar procedures for temporary use.

1.6 PROJECT CONDITIONS:

- A. Temporary Use of Permanent Facilities and Services: The Contractor shall be responsible for the operation, maintenance, and protection of each permanent facility and service during its use as a construction facility before Final Acceptance by the City, regardless of previously assigned responsibilities.
- B. Install, operate, maintain and protect temporary facilities, services and controls.
1. Keep temporary services and facilities clean and neat in appearance.
 2. Operate temporary services in a safe and efficient manner.
 3. Relocate temporary services and facilities as needed as Work progresses.
 4. Do not overload temporary services and facilities or permit them to interfere with progress.
 5. Provide necessary fire prevention measures.
 6. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on-site.

1.7 NON-REGULAR WORK HOURS (OVERTIME):

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if the Drawings and/or the Specifications indicate that the Work, or specific components thereof, must be performed during other than regular working hours. In such case, all costs for the provision of temporary services, facilities and controls during other than regular working hours shall be deemed included in the total Contract Price.
- B. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if a change order is issued directing the Contractor to perform the Work, or specific components thereof, during other than regular working hours. In such case, compensation for the provision of temporary services, facilities and controls during other than regular working hours shall be provided through the change order.

1.8 SERVICES BEYOND COMPLETION DATE:

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall provide such temporary services, facilities and controls even if completion of all required work at the site occurs after the time fixed for such completion in Schedule A.

PART II – PRODUCTS

2.1 MATERIALS:

- A. Provide undamaged materials in serviceable condition and suitable for use intended.
- B. Tarpaulins: Waterproof, fire-resistant UL labeled with flame spread rating of 15 or less. For temporary enclosures, provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.
- C. Water: Potable and in compliance with requirements of the Department of Environmental Protection.

2.2 EQUIPMENT:

- A. Provide undamaged equipment in serviceable condition and suitable for use intended.
- B. Water Hoses: Heavy-duty abrasive-resistant flexible rubber hoses, 100 feet (30 m) long with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
- C. Electric Power Cords: Grounded extension cords.
 - 1. Provide hard-service cords where exposed to abrasion or traffic.
 - 2. Provide waterproof connectors to connect separate lengths of electric cords where single lengths will not reach areas of construction activity.
 - 3. Do not exceed safe length-voltage ratio.
- D. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent UL as required by locations and classes of fire exposures.

PART III – EXECUTION:

3.1 INSTALLATION, GENERAL:

- A. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities as approved by the Resident Engineer.

3.2 TEMPORARY WATER SYSTEM:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 A

- A. TEMPORARY WATER SYSTEM - NEW FACILITIES: During construction, the Contractor shall furnish a Temporary Water System as set forth below.
 - 1. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Dept. of Environmental Protection for the schedule of charges for water use during construction. The Contractor will be responsible for payment of water charges.
 - 2. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Department of Environmental Protection's Bureau of Water Supply and obtain a permit to install the temporary water supply system. The system shall be installed and maintained for the use of the Contractor and its subcontractors. A copy of the above mentioned permit shall be filed with the Commissioner. The Contractor shall provide temporary water main, risers and waste stacks as directed and install on each floor, outlets with two (2) 3/4" hose valve connections over a barrel installed on a steel pan. The Contractor shall provide drains from the pans to the stack and house sewer and hose bibs to drain the water supply



risers and mains. During winter months, the Contractor shall take the necessary precautions to prevent the temporary water system from freezing. The Contractor shall provide repairs to the temporary water supply system for the duration of the project until said temporary system is dismantled and removed.

3. Disposition of Temporary Water System: The Contractor shall be responsible for dismantling the temporary water system when no longer required for the construction operations, or when replaced by the permanent water system installed for the project, or as otherwise directed by the Resident Engineer. All repair work resulting from the dismantling of the temporary water system shall be the responsibility of the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 B

B. TEMPORARY WATER SYSTEM – PROJECTS IN EXISTING FACILITIES:

1. When approved by the Commissioner, use of existing water system will be permitted for temporary water service during construction, as long as the system is cleaned and maintained in a condition acceptable to the Commissioner. At Substantial Completion, the Contractor shall restore the existing water system to conditions existing before initial use.
2. The Contractor shall be responsible for all repairs to the existing water system permitted to be used for temporary water service during construction. The Contractor shall be responsible to maintain the existing system in a clean condition on a daily basis, acceptable to the Commissioner.
3. The Contractor will be responsible for payment of water charges as directed by the Commissioner. Billing will be in accordance with the Department of Environmental Protection schedule of charges for Building Purposes.

C. WASH FACILITIES: The Contractor shall install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a healthy and sanitary condition.

1. Dispose of drainage properly.
2. Supply cleaning compounds appropriate for each condition.
3. Include safety showers, eyewash fountains and similar facilities for the convenience, safety and sanitation of personnel.

D. DRINKING WATER FACILITIES: The Contractor shall provide drinking water fountains or containerized tap-dispenser bottled-drinking water units, complete with paper cup supplies. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg. F (7 to 13 deg. C).

3.3 TEMPORARY SANITARY FACILITIES:

- A.** The Contractor shall provide toilets, wash facilities and drinking water fixtures in compliance with regulations and health codes for type, number, location, operation and maintenance of fixtures and facilities. Provide toilet tissue, paper towels, paper cups and similar disposable materials as appropriate for each facility, and provide covered waste containers for used materials.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 B

B. SELF-CONTAINED TOILET UNITS:

1. The Contractor shall provide temporary single-occupant toilet units of the chemical, aerated recirculation, or combustion type for use by all construction personnel. Units shall be properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material. Quantity of toilet units shall comply with the latest OSHA regulations.
2. Toilets: Install separate self-contained toilet units for male and female personnel. Shield toilets to ensure privacy.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 C

C. EXISTING TOILETS:

1. **TOILET FACILITIES:** When approved by the Commissioner, the Contractor shall arrange for the use of existing toilet facilities by all personnel during the execution of the work. The Contractor shall be responsible to clean and maintain facilities in a condition acceptable to the Resident Engineer and, at completion of construction, to restore facilities to their condition at the time of initial use.
2. **MAINTENANCE** - The Contractor shall maintain the temporary toilet facilities in a clean and sanitary manner and make all necessary repairs.
3. **NUISANCES** - The Contractor shall not cause any sanitary nuisance to be committed by its employees or the employees of its subcontractors in or about the work, and shall enforce all sanitary regulations of the City and State Health Authorities.

3.4 TEMPORARY ELECTRIC POWER, TEMPORARY LIGHTING SYSTEM, AND SITE SECURITY LIGHTING:

- A. **SCOPE:** This Section sets forth the General Conditions and procedures relating to Temporary Electric Power, Temporary Lighting System and Site Security Lighting during the construction period.
- B. **TEMPORARY ELECTRIC POWER:**
The Contractor shall provide and maintain a Temporary Electric Power service and distribution system of sufficient size, capacity and power characteristics required for construction operations for all required work by the Contractor and its subcontractors, including but not limited to power for the Temporary Lighting System, Site Security Lighting, construction equipment, hoists, temporary elevators and all field offices. Temporary Electric Power shall be provided as follows:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (1)

1. **CONNECTION TO UTILITY LINES:**
 - a. Temporary Electric Power Service for use during construction shall be provided as follows: The Contractor shall make all necessary arrangements with the Public Utility Company and pay all charges for the Temporary Electric Power system. The Contractor shall include in its total Contract Price any charges for Temporary Electric Power, including charges that may be made by the Public Utility Company for extending its electrical facilities, and for making final connections. The Contractor shall make payment directly to the Public Utility Company.
 - b. **APPLICATIONS FOR METER:** The Contractor shall make application to the Public Utility Company and sign all documents necessary for, and pay all charges incidental to, the installation of a watt hour meter or meters for Temporary Electric Power. The Contractor shall pay to the Public Utility Company, all bills for Temporary Electric energy used throughout the work, as they become due.
 - c. **SERVICE AND METERING EQUIPMENT** - The Contractor shall furnish and install, at a suitable location on the site, approved service and metering equipment for the Temporary Electric Power System, ready for the installation of the Public Utility Company's metering devices. The temporary service mains to and from the metering location shall be not less than 100 Amperes, 3-phase, 4-wire and shall be of sufficient capacity to take care of all demands for all construction operations and shall meet all requirements of the NYCEC.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (2)

2. CONNECTION TO EXISTING ELECTRICAL POWER SERVICE:
- a. When approved by the Commissioner, electrical power service for the Temporary Lighting System and for the operation of small tools and equipment less than ¼ horsepower may be taken from the existing electric distribution system if the existing system is of adequate capacity for the temporary power load. The Contractor shall cooperate and coordinate with the facility custodian, so as not to interfere with the normal operation of the facility.
 - b. There will be no charge to the Contractor for the electrical energy consumed.
 - c. The Contractor shall provide, maintain and pay all costs for separate temporary electric power for any temporary power for equipment larger than 1/4 horsepower. When directed by the Commissioner, the Contractor shall remove its own temporary power system.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (3)

3. ELECTRICAL GENERATOR POWER SERVICE:
- a. When connection to Utility Lines or existing facility electric service is not available or is not adequate to supply the electric power need for construction operations, the Contractor shall provide self-contained generators to provide power beyond that available.
 - b. Pay for all energy consumed in the progress of the Work, exclusive of that available from the existing facility or Utility Company.
 - c. Provide for control of noise from the generators.
 - d. Comply with the Ultra Low Sulfur Fuel in Non-Road Vehicles requirements as set forth in Article 5.4 of the Contract.
- C. USE OF COMPLETED PORTIONS OF THE ELECTRICAL WORK:
1. USE OF MAIN DISTRIBUTION PANEL: As soon as the permanent electric service feeders and equipment, metering equipment and main distribution panel are installed and ready for operation, the Contractor shall have the temporary lighting and power system changed over from the temporary service points to the main distribution panel.
 2. COST OF CHANGE OVER - The Contractor shall be responsible for all costs due to this change over of service and it shall also make application to the Public Utility Company for a watt hour meter to be set on the permanent meter equipment.
 3. The requirements for temporary electric power service specified herein shall be adhered to after change over of service until final acceptance of the project.
 4. NO EXTRA COST - The operation of the service and switchboard equipment shall be under the supervision of the Contractor, but this shall in no way be interpreted to mean the acceptance of such part of the installation or relieve the Contractor from its responsibility for the complete work or any part thereof. There shall be no additional charge for supervision by the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 D

- D. TEMPORARY LIGHTING SYSTEM:
1. The Contractor shall provide adequate service for the temporary lighting system, or a minimum of 100 Amperes, 3-phase, 4-wire service for the temporary lighting system, whichever is



- greater, and make all necessary arrangements with the Public Utility Company and pay all charges by them for the Temporary Lighting System
2. The Contractor shall furnish and connect to the metered service point, a Temporary Lighting System to illuminate the entire area where work is being performed and points adjacent to the work, with separately fused circuits for stairways and bridges. Control switches for stairway circuits shall be located near entrance on ground floor.
 3. ITEMS: The Temporary Lighting System provided by the Contractor shall consist of wiring, fixtures, left-hand double sockets, (one (1) double socket for every 400 square feet, with one (1) lamp and one (1) three-prong outlet) lamps, fuses, locked type guards, pigtails and any other incidental material. Additional details may be outlined in the detailed Specifications for the Electrical Work. Changes may be made, provided the full equivalent of those requirements is maintained.
 4. The Temporary Lighting System shall be progressively installed as required for the advancement of the work under the Contract.
 5. RELOCATION: The cost for the relocation or extension of the original Temporary Lighting System, required by the Contractor or its subcontractors, that is not required due to the normal advancement of the work, as determined by the Resident Engineer, shall be borne by the Contractor.
 6. PIGTAILS: shall be furnished with left-hand sockets with locked type guards and 40 feet of rubber covered cable. The Contractor shall furnish and distribute a minimum of three (3) complete pigtails to each subcontractor. See the detailed Electrical Specifications for possible additional pigtails required.
 7. LAMPS: The Contractor shall furnish and install one (1) complete set of lamps, including those for the trailers. Broken and burned out lamps in the temporary lighting system, DDC field office and construction trailers, shall be replaced by the Contractor. All lamps shall be compact fluorescent.
 8. CIRCUIT PROTECTION: The Contractor shall furnish and install GFI protection for the Temporary Lighting and Site Security Lighting Systems.
 9. MAINTENANCE OF TEMPORARY LIGHTING SYSTEM:
 - a. The Contractor shall maintain the Temporary Lighting System in good working order during the scheduled hours established.
 - b. The Contractor shall include in its total Contract Price all costs in connection with the Temporary Lighting System, including all costs for installation, maintenance and electric power.
 10. REMOVAL OF TEMPORARY LIGHTING SYSTEM: The temporary lighting system shall be removed by the Contractor when authorized by the Commissioner.
 11. HAND TOOLS: The temporary lighting system shall not be used for power purposes, except that light hand tools not larger than 1/4 horsepower may be operated from such system by the Contractor and its subcontractors.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 E

- E. SITE SECURITY LIGHTING (FOR NEW CONSTRUCTION ONLY):
1. The Contractor shall furnish, install and maintain a system of site security lighting, as herein specified, to illuminate the construction site of the project, and it shall be connected to and energized from the Temporary Lighting System. All costs in connection with site security lighting shall be deemed included in the total Contract Price.
 2. It is essential that the site security lighting system be completely installed and operating, at the earliest possible date. The Contractor shall direct its subcontractors to cooperate, coordinate and exert every effort to accomplish an early complete installation of the site security lighting system. After the system is installed and in operation, if a part of the system interferes with the work of any trade, the Contractor shall be completely responsible for the expense of removing,



- relocating and replacing all equipment necessary to reinstate the system to proper operating conditions.
3. The system shall consist of flood lighting by pole mounted guarded sealed-beam units. Floodlight units shall be mounted 16 feet above grade. Floodlights shall be spaced around the perimeter of the site to produce an illumination level of no less than one (1) foot candle around the perimeter of the site, as well as in any potentially hazardous area or any other area within the site that might be deemed by the Resident Engineer to require security illumination. The system shall be installed in a manner acceptable to the Resident Engineer. The first lighting unit in each circuit shall be provided with a photoelectric cell for automatic control. The photoelectric cell shall be installed as per manufacturer's recommendations.
 4. All necessary poles shall be furnished and installed by the Contractor.
 5. The site security lighting shall be kept illuminated at all times during the hours of darkness. The Contractor shall, at its own expense, shall keep the system in operation, and shall furnish and install all material necessary to replace all damaged or burned out parts.
 6. The Contractor shall be on telephone call alert for maintaining the system during the operating period stated above.
 7. All materials and equipment furnished under this section shall remain the property of the Contractor and shall be removed and disposed of by the Contractor when authorized in writing by the Resident Engineer.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 TEMPORARY HEAT:

A. GENERAL:

1. Definition: The provision of Temporary Heat shall mean the provision of heat in order to permit construction to be performed in accordance with the Progress Schedule during all seasons of the year and to protect the work from the harmful effects of low temperature. In the event the building, or any portion thereof, is occupied during construction, the provision of Temporary Heat shall include the provision of heat to permit normal operations in such occupied areas.
 - a. The provision of Temporary Heat shall be in accordance with the temperature requirements set forth in Sub-Section 3.5 C herein.
 - b. The provision of Temporary Heat shall include the provision of: 1) all fuel necessary and required, 2) all equipment necessary and required, and 3) all operating labor necessary and required. Operating labor shall mean that minimum force required for the safe day to day operation of the system for the provision of Temporary Heat and shall include, without limitation, heating maintenance labor and/or Fire Watch as required by NYC Fire Department regulations. Operating labor may be required seven (7) days per week and during other than normal working hours, for the period of time required by seasonal weather conditions.
 - c. In the event the building, or any portion thereof, is occupied and the Project involves the replacement, modification and/or shut down of the permanent heating system, or any key component thereof; and such system is a combined system which furnishes domestic hot water for the building occupants, the provision of Temporary Heat shall include the provision of domestic hot water at the same temperature as the system which is being replaced. Domestic hot water shall be provided in accordance with the phasing requirements set forth in the Contract Documents.
2. Responsibility: The Contractor's responsibility for the provision of Temporary Heat, including all expenses in connection therewith, shall be as set forth below:
 - a. Projects Involving Enclosure of the Building:



- 1) Prior to Enclosure - Until the Commissioner determines that the building has been enclosed, as set forth in Sub-Section 3.5 B; the Contractor shall be responsible for the provision of Temporary Heat.
- 2) Post Enclosure - Once the Commissioner determines that the building, or any portion thereof, has been enclosed, as set forth in Sub-Section 3.5 B, the Contractor shall be responsible for the provision of Temporary Heat by one or more of the following means: 1) by an existing heating system (if any), 2) by a permanent heating system which is being installed as part of the Project, or 3) by a temporary heating system(s).
- 3) The Contractor shall, within two (2) weeks of the kick-off meeting, submit to DDC for review its proposed plan to provide Temporary Heat. Such plan is subject to approval by the Resident Engineer. The Contractor shall provide Temporary Heat in accordance with the approved plan until written acceptance by the Commissioner of the work of all Contractors, including punch list work, unless directed otherwise in writing by the Commissioner. The responsibility of the Contractor provided for herein is subject to the exception set forth in Sub-Section 3.5 A.2 (b) herein.

b. Projects not involving Enclosure of the Building:

- 1) If the Project involves the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, the Contractor shall be responsible for the provision of Temporary Heat, except as otherwise provided in Sub-Section 3.5 H.3(b).2 herein.
- 2) If the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof; there is no Contractor responsibility of the provision of Temporary Heat, unless otherwise specified in the Contract Documents. However, if the Commissioner, pursuant to Sub-Section 3.5 H.3 (b).1 herein, determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat and shall be paid for the same in accordance with Sub-Section 3.5 H.3 (b).1 herein.

B. ENCLOSURE OF STRUCTURES:

1. Notification: The Contractor shall notify all its subcontractors and the Resident Engineer at least 30 days prior to the anticipated date that the building(s) will be enclosed.
2. Commissioner Determination: The Commissioner shall determine whether the building, or any portion thereof, has been enclosed. As indicated in Sub-Section 3.5 A.2 above, once the building has been enclosed, the Contractor shall be responsible for the provision of Temporary Heat. The Commissioner's determination with respect to building enclosure shall be based upon all relevant facts and circumstances, including without limitation, 1) whether the building meets the criteria set forth in Paragraph 3 below, and 2) whether the openings in the building, such as doorways and windows, have been sufficiently covered so as to provide reasonable heat retention and protection from the elements.
3. Criteria for enclosure:
 - a. Roof Area:
 - 1) A building shall be considered to be roofed when the area to be roofed is covered by a permanent structure and all openings through the permanent structure are covered and protected by temporary covers as described in Paragraph (c) below.
 - 2) Intermediate floor structures of multi-floor buildings shall be considered to be roofed subject to the same requirements of the building roof.



- 3) The final roofing system need not be in place for the building or structure to be determined to be enclosed; provided, however, all openings through the permanent structure covering the roof must be covered and protected by temporary covers, as described in Paragraph (c) below.
- b. Walls: For the walls to be determined to be enclosed permanent exterior wall elements or facing material must be in place and all openings must be covered and protected by temporary covers, as described in Paragraph (c) below.
- c. Temporary Covers: In order to be acceptable, temporary covers must be securely fixed to prevent the entrance of rain, snow and direct wind. The minimum material requirements for temporary covers are as follows: 1) minimum 10 mil. Plastic 2) minimum 12 ounce waterproof canvas tarpaulins, or 3) a minimum three-eighths (3/8) inch thickness exterior grade plywood.
- d. Temporary covers for openings shall be the responsibility of the Contractor and such work shall be deemed included in the Contract price.

C. TEMPERATURE REQUIREMENTS:

- 1. Unoccupied Buildings: The temperature requirement for the provision of Temporary Heat in unoccupied buildings shall be the GREATER of the following: 1) 50 degrees Fahrenheit, or 2) the temperature requirement for the particular type of work set forth in the Contract Documents.
- 2. Occupied Buildings: The temperature requirement for the provision of Temporary Heat in occupied buildings, or portions thereof, shall be the GREATER of the following: 68 degrees Fahrenheit or the temperature requirement for the particular type of work set forth in the Contract Documents.

D. DURATION:

- 1. The Contractor shall be required to provide Temporary Heat until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall be responsible for the provision of Temporary Heat for the time specified herein, regardless of any delays in completion of the Project, including delays that result in the commencement of the provision of Temporary Heat during a season that is later than that which may have been originally anticipated. The Contractor shall include in its Total Contract Price all expenses in connection with the provision of Temporary Heat in accordance with the requirements specified herein.
- 2. The total Contract duration is set forth in consecutive calendar days in Schedule A of the Addendum. The Table set forth below indicates the number of full heating seasons that are deemed included in various contract durations, which are specified in consecutive calendar days (ccds). At a minimum, a full heating season shall extend from October 15th to April 15th.

Contract Duration	Full Heating Seasons Required
up to 360 ccds	1 full heating season
360 to 720 ccds	2 full heating seasons
more than 720 ccds	3 full heating seasons

E. METHOD OF TEMPORARY HEAT:

- 1. The method of temporary heat shall be in conformance with the New York City Fire Code and with all applicable laws, rules and regulations. Prior to implementation, such method shall be subject to the written approval of the Commissioner.
- 2. The method of temporary heat shall:
 - a. Not cause the deposition of dirt or smudges upon any finished work or cause any defacement or discoloration to the finished work.
 - b. Not be injurious or harmful to people or materials.

- c. Portable fueled heating devices or equipment SHALL NOT BE ALLOWED for use as temporary heat other than construction-related curing or drying in conformance with the NYC Fire Code.
3. No open fires will be permitted.

F. TEMPORARY HEATING SYSTEM:

1. The temporary system for the provision of Temporary Heat provided by the Contractor following enclosure of the building shall be complete including, subject to provisions of paragraph E above, boilers pumps, radiators, space heaters, water and heating piping, insulation and controls. The temporary system for the provision of Temporary Heat shall be capable of maintaining the minimum temperature requirements set forth in Paragraph C above.

G. COORDINATION:

1. The Contractor, in the provision of Temporary Heat, shall coordinate its operations in order to insure sufficient and timely performance of all required work, including work performed by trade subcontractors. The Contractor shall supply and pay for all water required and used in the building for the operation of the heating system(s) for the purpose of Temporary Heat. The Contractor shall include all expenses in connection with the supply of water for Temporary Heat in its Total Contract Price. During the period in which Temporary Heat in an enclosed building is being furnished and maintained, the Contractor shall provide proper ventilating and drying, open and close the windows and other openings when necessary for the proper execution of the work and also when directed by DDC. The Contractor shall maintain all permanent or temporary enclosures at its own expense.

H. USE OF PERMANENT HEATING SYSTEMS:

1. Use of Permanent Heating System for Temporary Heat after Building Enclosure
 - a. The Contractor shall provide all labor and materials to promptly furnish and set all required equipment and convectors and/or radiators, piping, valves, fitting, etc., in ample time for their use for the provision of Temporary Heat after enclosure of the building.
 - b. New portions of the permanent heating system that are used for furnishing Temporary Heat shall be left in near perfect condition when delivered to the City for operation. Any repairs required, other than for ordinary wear and tear on the equipment, shall be made by the Contractor at his/her expense. The starting date for the warranty or guarantee period for such equipment shall be the date of Substantial Completion acceptance.
 - c. In the event that the Contractor does not advance the installation of the permanent heating system in sufficient time to permit its use for Temporary Heat as determined by DDC, the Contractor shall furnish and install a separate system for the provision of Temporary Heat as required to maintain the minimum temperature requirements set forth in Paragraph C above.
2. All equipment for the system for the provision of Temporary Heat shall be placed so as to comply with the requirements specified hereinbefore, and shall be connected, disconnected and suitably supported and located so as to permit construction work, including finish work such as wall plastering and painting, to proceed. The installation of the system for the provision of Temporary Heat by the Contractor, including the placing of ancillary system equipment, shall be coordinated with the operations of all trade subcontractors so as to insure sufficient and timely performance of the work. Once the permanent heating system is operating properly, the Contractor shall remove all portions of the system for Temporary Heat not part of the permanent heating system.
3. Temporary Heat Allowance for Special Conditions or and/or Unforeseen Circumstances.
 - a. The City may establish an allowance in the Contract for payment of costs and expenses in connection with the provision of Temporary Heat as set forth herein. If established, the City will include an amount for such allowance on the Bid Form, and the Contractor shall



include such allowance amount in its Total Contract Price. The Contractor shall only be entitled to payment from this allowance under the conditions and in accordance with the requirements set forth below. In the event this allowance or any portion thereof remains unexpended at the conclusion of the Contract, such allowance shall remain the sole property of the City. Should the amount of the allowance be insufficient to provide payment for the expenses specified below, the City will increase the amount of the allowance.

- b. The allowance set forth herein may be utilized only under the conditions set forth below.
 1. In the event the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, and the Commissioner determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat, as directed by the Commissioner. The City shall pay such Contractor for all costs for labor, material, and equipment necessary and required for the same. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
 2. In the event the Commissioner determines that there is a need for maintenance of the permanent heating system by the Contractor after written acceptance by the Commissioner of the work, and that the need for such maintenance is not the fault of the Contractor, the Contractor shall provide the required maintenance of the permanent heating system for the period of time directed by the Commissioner. The City shall pay the Contractor for the cost of direct labor and fuel necessary and required in connection with such maintenance, excluding the cost of any foremen or other supervision. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
- c. Payment for Fuel Costs - Payment from the allowance set forth herein for the cost of fuel necessary and required to operate the system for the provision of Temporary Heat or to maintain the permanent heating system under the conditions set forth in Paragraph b above shall be limited to the direct cost of such fuel. The Contractor shall not be entitled to any overhead and/or profit for such fuel costs. In order to receive payment for such fuel costs, the Contractor must present original invoices for the same. DDC reserves the right to furnish the required fuel.

I. RELATED ELECTRICAL WORK:

1. The Contractor shall be responsible for providing the items set forth below and shall include all expenses in connection with such items in its Total Contract Price. The Contractor shall provide such items promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
 - a. The Contractor shall provide all labor, materials, equipment and power necessary and required to furnish and maintain any temporary or permanent electrical connections to all equipment specified to be connected as part of the work of his Contract.
 - b. The Contractor shall supply and pay for all power necessary and required for the operation of the system for the provision of Temporary Heat and/or the permanent heating system used for Temporary Heat. Such power shall be provided by the Contractor for the duration the Contractor is required to provide Temporary Heat, as set forth in Sub-section 3.5 D herein.
2. In providing the items set forth in Paragraph 1 above, the Contractor is advised that labor may be required seven (7) days a week and/or during other than normal working hours for the period of time required by seasonal weather conditions.



J. RELATED PLUMBING WORK:

1. The Contractor shall be responsible for providing all labor, materials and equipment necessary and required to furnish and maintain all temporary or permanent connections to all equipment or plumbing outlets specified to be provided as part of the work of this Contract. The Contractor shall include all expenses in connection with such items of work in its Total Contract Price. The Contractor shall provide such items of work promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
2. In the event portions of the permanent plumbing equipment furnished by the Contractor as part of the work of this Contract are used for the provision of Temporary Heat either during construction or prior to acceptance by the City of the complete plumbing system, the Contractor shall be responsible to provide such plumbing equipment to the City in near perfect condition and shall make any repairs required, other than for ordinary wear and tear on the equipment, at his expense. The starting date for warranty and/or guarantee period for such plumbing equipment shall be the date of Substantial Completion acceptance by the City.
3. For Projects requiring the installation of new and/or modified gas service, as well as associated meter installations, the Contractor shall promptly perform all required filings and coordination with the Utility Companies in order to expedite the installation, testing, and approval of the gas service and associated meter(s).

3.6 STORM WATER CONTROL, DEWATERING FACILITIES AND DRAINS:

A. PUMPING:

1. Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of storm water from heavy rainfall.
2. Contractor shall furnish and install all necessary automatically operated pumps of adequate capacity with all required piping to run-off agencies, so as to maintain the excavation, cellar floor, pits and exterior depressions and excavations free from accumulated water during the entire period of construction and up to the date of final acceptance of work of the Contract.
3. All pumps shall be maintained at all times in proper working order.
4. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties nor endanger permanent Work or temporary facilities.
5. Remove snow and ice as required to minimize accumulations.

3.7 TEMPORARY FIELD OFFICE FOR CONTRACTOR:

- A. The Contractor shall establish a temporary field office for its own use at the site during the period of construction, at which readily accessible copies of all Contract Documents shall be kept.
- B. The field office shall be located where it will not interfere with the progress of any part of the work or with visibility of traffic control devices.
- C. **CONTRACTOR'S REPRESENTATIVE:** In charge of the office there shall be a responsible and competent representative of the Contractor, duly authorized to receive orders and directions and to put them into effect.
- D. Arrangements shall be made by the Contractor whereby its representative may be readily accessible by telephone.
- E. All temporary structures shall be of substantial construction and neat appearance, and shall be painted a uniform gray unless otherwise directed by the Commissioner.
- F. **CONTRACTOR'S SIGN** - The Contractor shall post and keep posted, on the outside of its field office, office or exterior fence or wall at site of work, a legible sign giving full name of the company, address of the company and telephone number(s) of responsible representative(s) of the firm who can be reached in event of an emergency at any time.



- G. ADVERTISING PRIVILEGES - The City reserves the right to all advertising privileges. The Contractor shall not cause any signs of any kind to be displayed at the site unless specifically required herein or authorized by the Commissioner.

3.8 DDC FIELD OFFICE:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 A

- A. OFFICE SPACE IN EXISTING BUILDING:
 - 1. The Resident Engineer will arrange for office space for sole use in the building where work is in progress. The Contractor shall provide and install a lockset for the door to secure the equipment in the room. The Contractor shall provide two (2) keys to the Resident Engineer. After completion of the project the Contractor shall replace the original lockset on the door and ensure its proper operation.
 - 2. In addition to equipment specified in Sub-Section 3.8 D, the Contractor shall provide, for exclusive use of the DDC Field Office, the following:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two metal (2) lockers, single units, 15" x 18" x 78" overall including 6" legs. Lockers to have flat key locks with two (2) keys each, General Steel products or approved equal. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks, approximately 52"H x 28 1/2"D x 18"W.
 - b. One (1) 9000 B.T.U air conditioner or as directed by Commissioner. Wiring for the air conditioner shall be minimum No. 12 AWG fed from individual circuits in the fuse box.
 - c. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - d. Two (2) metal wastebaskets.
 - e. One (1) fire extinguisher, one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - f. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the project as required.
 - 3. The Contractor shall provide one (1) telephone, where directed and shall pay all costs for telephone service for calls within the New York City limits for the duration of the project.
 - 4. All furniture and equipment, except computer equipment specified in Sub-Section 3.8 D.3, shall remain the property of the Contractor.
 - 5. Computer Workstation quantities shall be provided as specified in Sub-Section 3.8 B 3-a for DDC Managed Projects, or Sub-Section 3.8 B 3-b for CM Managed Projects.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 B

- B. DDC FIELD OFFICE TRAILER:
 - 1. GENERAL: The Contractor shall, for the time frame specified herein, provide and maintain at its own cost and expense a DDC Construction Field Office and all related items as specified herein [hereinafter collectively referred to as the "DDC Field Office"] for the exclusive use of the Resident Engineer. The DDC Field Office shall be located at the Project site and shall be solely dedicated to the Project. Provision of the DDC Field Office shall commence within THIRTY (30) days from Notice to proceed and shall continue through forty-five (45) days after Substantial Completion of the required construction at the Project site. The Contractor shall remove the DDC Field Office forty-five (45) days after Substantial Completion of the required construction, or as otherwise directed in writing by the Commissioner.
 - 2. TRAILER: The Contractor shall provide at its own cost and expense a mobile office trailer for use as the DDC Field Office. The Contractor shall install and connect all utility services to the



trailer within thirty (30) days from Notice to Proceed. The trailer shall have equipment in compliance with the minimum requirements hereinafter specified. Any permits and fees required for the installation and use of said trailer shall be borne by the Contractor. The trailer including furniture and equipment therein, except computer equipment specified in Sub-Section 3.8D.3 herein, shall remain the property of the Contractor.

- 3. Trailer shall be an office type trailer of the size specified herein, with exterior stairs at entrance. Trailer construction shall be minimum 2 x 4 wall construction fully insulated with paneled interior walls, pre-finished gypsum board ceilings and vinyl tile floors.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8.B.3a or
SUB-SECTION 3.8.B.3b.**

- a. DDC Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 32 Feet
Overall width: 10 Feet
 - 2) Interior Layout:
Provide one (1) general office/conference room area and one (1) private office at one end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
 - 3) Computer Workstation: Provide one (1) complete computer workstation, as specified in Sub-Section 3.8.D herein, in the private office area as directed by the Resident Engineer.

- b. CM Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 50 Feet
Overall width: 10 Feet
 - 2) Interior Layout:
Provide one (1) large general office/conference room in the center of the trailer and two (2) private offices, one (1) each at either end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
 - 3) Computer Workstation:
Provide three (3) complete computer workstations as specified in Sub-Section 3.8.D herein. Provide one (1) each complete computer workstation in each private office and one (1) complete computer workstation at the secretarial position as directed by the Resident Engineer.

- 4. The exterior of the trailer shall be lettered with black block lettering of the following heights with white borders:

CITY OF NEW YORK	2-1/2"
DEPARTMENT OF DESIGN AND CONSTRUCTION	3-3/4"
DIVISION OF PUBLIC BUILDINGS	3-1/2"
DDC FEILD OFFICE	2-1/2"

NOTE: In lieu of painting letters on trailer the Contractor may substitute a sign constructed of a good quality weatherproof material with the same type and size of lettering above.

- 5. All windows and doors shall have aluminum insect screens. Provide wire mesh protective guards at all windows.
- 6. The interior shall be divided by partitions into general and private office areas as specified herein. Provide a washroom located adjacent to the private office and a built-in wardrobe closet opposite the washroom. Provide a built-in desk in the private office(s) with fixed overhead shelf and clearance below for two (2) file cabinets.



7. Provide a built-in drafting or reference table, located in the general office/conference room, at least 60 inches long by 36 inches wide with cabinet below and wall type plan rack at least 42 inches wide.
8. The washroom shall be equipped with a flush toilet, wash basin with two (2) faucets, medicine cabinet, complete with supplies and a toilet roll tissue holder. Plumbing and fixtures shall be approved house type, with each appliance trapped and vented and a single discharge connection. Five (5) gallon capacity automatic electric heater for domestic hot water shall be furnished.
9. HVAC: The trailer shall be equipped with central heating and cooling adequate to maintain a temperature of 72 degrees during the heating season and 75 degrees during the cooling season when the outside temperature is 5 degrees F. winter and 89 degrees F. summer.
10. Lighting shall be provided via ceiling mounted fluorescent lighting fixtures to a minimum level of 50 foot candles in the open and private office(s) along with sufficient lighting in the washroom. Broken and burned out lamps shall be replaced by the Contractor. A minimum of four (4) duplex convenience outlets shall be provided in the open office and two (2) each in the private office(s). These outlets shall be in addition to special outlet requirements for computer stations, copiers, HVAC unit, etc.
11. Electrical service switch and panel shall be adequately sized for the entire trailer load. Provide dedicated circuits for HVAC units, hot water heater, copiers and other equipment as required. All wiring and installation shall conform to the New York City Electrical Code.
12. The following movable equipment shall be furnished:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks and two (2) full ball bearing two (2) drawer vertical legal filing cabinets in each private office located below built-in desk.
 - b. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - c. Three (3) metal wastebaskets.
 - d. One (1) fire extinguisher one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - e. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the Contract as required.
13. TRAILER TEMPORARY SERVICE: Plumbing and electrical work required for the trailer will be furnished and maintained as below.
 - a. PLUMBING WORK: The Contractor shall provide temporary water and drainage service connections to the DDC Field Office trailer for a complete installation. Provide all necessary soil, waste, vent and drainage piping.

Contractor to frost-proof all water pipes to prevent freezing.

 - 1) REPAIRS, MAINTENANCE: The Contractor shall provide repairs for the duration of the project until the trailer is removed from the site.
 - 2) DISPOSITION OF PLUMBING WORK: At the expiration of the time limit set forth in Sub-Section 3.8 B 1 herein, the temporary water and drainage connections and piping to the DDC Field Office trailer shall be removed by the Contractor and shall be plugged at the mains. All piping shall become the property of the Contractor for Plumbing Work and shall be removed from the site, all as directed. All repair work due to these removals shall be the responsibility of the Contractor.
 - b. ELECTRICAL WORK:
 - 1) The Contractor shall furnish, install and maintain a temporary electric feeder to the DDC Field Office trailer immediately after it is placed at the job site.
 - 2) The temporary electrical feeder and service switch/fuse shall be adequately sized based on the trailer load and installed per the New York City Electrical Code and complying with utility requirements.



- 3) Make all arrangements and pay all costs to provide electric service.
- 4) The Contractor shall pay all costs for current consumed and for maintenance of the system in operating condition, including the furnishing of the necessary bulb replacements lamps, etc., for the duration of the project and for a period of forty-five (45) days after the date of Substantial Completion.
- 5) Disposition of Electric Work: At the expiration of the time limit set forth, the temporary feeder, safety switch, etc., shall be removed and disposed of as directed.
- 6) All repair work due to these removals shall be the responsibility of the Contractor.

c. MAINTENANCE

- 1) The Contractor shall provide and pay all costs for regular weekly janitor service and furnish toilet paper, sanitary seat covers, cloth towels and soap and maintain the DDC Field Office in first-class condition, including all repairs, until the trailer is removed from the site.
- 2) Supplies: The Contractor shall be responsible for providing (a) all office supplies, including without limitation, pens, pencils, stationery, filtered drinking water and sanitary supplies, and (b) all supplies in connection with required computers and printers, including without limitation, an adequate supply of blank CD's/DVD's, storage boxes for blank CDs/DVDs, and paper and toner cartridges for the printer.
- 3) Risk of Loss: The entire risk of loss with respect to the DDC Field Office and equipment shall remain solely and completely with the Contractor. The Contractor shall be responsible for the cost of any insurance coverage determined by the Contractor to be necessary for the Field Office.
- 4) At forty-five (45) days after the date of Substantial Completion, or sooner as directed by the Commissioner, the Contractors shall have all services disconnected and capped to the satisfaction of the Commissioner. All repair work due to these removals shall be the responsibility of the Contractor.

d. TELEPHONE SERVICE: The Contractor shall provide and pay all costs for the following telephone services for the DDC Field Office trailer:

- 1) Separate telephone lines for one (1) desk phone in each private office.
- 2) One (1) wall phone (with six (6) foot extension cord) at plan table.
- 3) Separate telephone lines for the fax machine and internet access in each private office. Telephone service shall include voice mail.
- 4) A remote bell located on outside of trailer
- 5) The telephone service shall continue until the trailer is removed from the site.

e. PERMITS: The Contractor shall make the necessary arrangements and obtain all permits and pay all fees required for this work.

- C. RENTED SPACE: The Contractor has the option of providing, at its cost and expense, rented office or store space in lieu of trailer. Said space shall be in the immediate area of the Project and have adequate plumbing, heating and electrical facilities. Space chosen by the Contractor for the DDC Field Office must be approved by the Commissioner before the area is rented. All insurance, maintenance and equipment, including computer workstations specified in Sub-Section 3.8 D in quantities required as specified in Sub-Section 3.8 B 3 for the DDC Field Office trailer, shall also apply to rented spaces.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 D

D. ADDITIONAL EQUIPMENT FOR THE DDC FIELD OFFICE:

1. The Contractor shall provide a high volume copy machine (50 copies per minute) for paper sizes 8½ x 11, 8½ x 14 & 11 x 17. Copier shall remain at job site until the DDC Field office trailer is removed from the site.



2. The Contractor shall furnish a fax machine and a telephone answering machine at commencement of the project for the exclusive use of the DDC Field Office. All materials shall be new, sealed in manufacturer's original packaging and shall have manufacturers' warranties. All items shall remain the property of the City of New York at the completion of the project.
3. **COMPUTER WORKSTATION:** The Contractor shall provide one complete computer workstation, in quantities specified in Sub-Section 3.8.B.3, as specified herein:
 - a. **Hardware/Software Specification:**
 - 1) **Computer Equipment -** Computers shall be provided for all contracts that have a **Total Consecutive Calendar Days** for construction duration as set forth in Schedule "A" of 180 CCD's or greater. Contracts of lesser duration shall not require computers.
 - 2) Computers furnished by the Contractor for use by City Personnel, for the duration of the contract, shall be in accordance with Specific Requirements, contained herein, shall remain the property of the City of New York at the completion of the project and shall meet the following minimum requirements:
 - 3) **Personal Computer(s) – Each Workstation Configuration.**
 - a) **Make and Model:** Dell; HP; Gateway; Acer; or, an approved equivalent. (Note: an approved equivalent requires written approval of the Assistant Commissioner of ITS.)
 - b) **Processor:** i5-2400 (6MB Cache, 3.1GHz) or faster computer - Single Processor.
 - c) **System RAM:** Minimum of 4GB (Gigabytes) Dual Channel DDR3 SDRAM at 1333MHz – 2 DIMMSs
 - d) **Hard Disk Drive(s):** 500 GB (Gigabytes) Serial ATA (7200RPM) w/DataBurst Cache, or larger.
 - e) **CD-RW:** Internal CD-RW, 48x Speed or faster.
 - f) **16xDVD+/-RW** DVD Burner (with double layer write capability) 16x Speed or faster
 - g) **I/O Ports:** Must have at least one (1) Serial Port, one (1) Parallel Port, and three (3) USB Ports.
 - h) **Video Display Card:** HD Graphics (VGA, HDMI) with a minimum of 64 MB of RAM.
 - i) **Monitor:** 22" W, 23.0 Inch VIS, Widescreen, VGA/DVI LCD Monitor.
 - j) **Available Exp. Slots:** System as configured above shall have at least two (2) full size PCI Slots available.
 - k) **Network Interface:** Integrated 10/100/1000 Ethernet card.
 - l) **Other Peripherals:** Optical scroll Mouse, 101 Key Keyboard, Mouse Pad and all necessary cables.
 - m) **Software Requirement:** Microsoft Windows 7 Professional SP1, 32 bit; Microsoft Office Professional 2010 or 2013; Microsoft Project 2010; Adobe Acrobat reader; Anti-Virus software package with 2 year updates subscription; and, either Auto Cad LT or Microsoft



Visio Standard Edition, as directed by the Resident Engineer.

- 4) DDC Field Office Specs: DDC Field Offices requiring computers shall be provided with the following:
 - a) One (1) broad-band internet service account. Wideband Internet connectivity at a minimum throughput of 15 Mbps download and 5 Mbps upload is required at each field office location with 1-5 staffers. For larger field offices see table below for minimum required upload speeds. Telephone service should be bundled together with Internet connectivity. Because of throughput requirements Verizon FIOS is the preferred connectivity provider where available.

Office Personnel #	Upload Speeds (Minimum)
1 – 5	5 Mbps
6 – 10	10 Mbps
11 – 15	15 Mbps
16 – 20 ...	20 Mbps

This account will be active for the life of the project. The e-mail name for the account shall be the DDC Field Office/project Id (e.g. FLD K HWK666 McGuinness@earthlink.com).

- b) One (1) 600 DPI HP Laser Jet Printer (twelve (12) pages per minute or faster) with one (1) Extra Paper (Legal Size)
 - c) All necessary cabling for equipment specified herein.
 - d) Storage Boxes for Blank CD's
 - e) Printer Table
 - f) UPS/Surge Suppressor combo
- 5) All computers required for use in the Engineer's Field Office shall be delivered, installed, and setup in the Field Office by the Contractor.
- 6) All Computer Hardware shall come with a three (3) year warranty for on-site repair or replacement. Additionally, and notwithstanding any terms of the warranty to the contrary, the Contractor is responsible for rectifying all computer problems or equipment failures within one (1) business day.
- 7) An adequate supply of blank CDs/DVDs, and paper and toner cartridges for the printer shall be provided by the Contractor, and shall be replenished by the Contractor as required by the Resident Engineer.
- 8) It is the Contractor's responsibility to ensure that electrical service and phone connections are also available at all times; that is, the Field Office Computer(s) is to be powered and turned on twenty-four (24) hours each day.
- 9) Broadband connectivity is preferred at each field office location. Please take into consideration that an extra phone line dedicated to the modem must be ordered as part of the contract unless Internet broadband connectivity, via Cable or DSL, is available at the planned field office location. Any questions regarding this policy should be directed to the Assistant Commissioner of Information Technology Services at 718-391-1761.
- 10) Ownership: The equipment specified above shall, unless otherwise directed by the Commissioner, be the sole property of the City of New York upon delivery to the DDC Field Office. The Contractor shall prepare and maintain an accurate inventory of all equipment which it purchases for the DDC Field Office. Such inventory shall be provided to the City of New York. Upon completion of the



required services, as directed by the Commissioner, the Contractor shall turn such equipment over to the City of New York.

E. HEAD PROTECTION (HARD HATS):

1. The Contractor shall provide a minimum of 10 standard protective helmets for the exclusive use of Department of Design and Construction personnel and their visitors. Helmets shall be turned over to the Resident Engineer and kept in the DDC Field Office.
2. Upon completion of the project, the helmets shall become the property of the Contractor.

3.9 MATERIAL SHEDS:

- A. Material sheds used by the Contractor for the storage of its materials shall be kept at locations which will not interfere at any time with the progress of any part of the work or with visibility of traffic control devices.
- B. Store combustible materials apart from the facility.

3.10 TEMPORARY ENCLOSURES:

- A. Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weather tight enclosure for building exterior.
- B. Where heating or cooling is needed and permanent enclosure is not complete, insulate temporary enclosures.

3.11 TEMPORARY PARTITIONS:

- A. Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate occupied tenant areas from fumes and noise.
 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant plywood on construction operations side.
 2. Construct dustproof partitions with 2 layers of 3-mil (0.07-mm) polyethylene sheet on each side. Cover floor with 2 layers of 3-mil (0.07-mm) polyethylene sheet, extending sheets 18 inches (460 mm) up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant plywood.
 - a. Construct vestibule and airlock at each entrance through temporary partition with not less than 48 inches (1219 mm) between doors. Maintain water-dampened foot mats in vestibule.
 3. Insulate partitions to provide noise protection to occupied areas.
 4. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
 5. Protect air-handling equipment.
 6. Weather strip openings.
 7. Provide walk-off mats at each entrance through temporary partition.

3.12 TEMPORARY FIRE PROTECTION:

- A. Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.
- B. Prohibit smoking in all areas.
- C. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.

- D. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- E. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 WORK FENCE ENCLOSURE:

- A. The Contractor shall furnish, erect and maintain a wood construction or chain-link fence to the extent shown on the drawings or required by the work enclosing the entire project on all sides. All materials used shall be new. Any permit required for the installation and use of said fence and costs shall be borne by the Contractor.
- B. WOOD FENCE shall be 7'-0" high with framing construction of yellow pine, using 4" x 4" approved preservative-treated posts on not more than 6'-0" centers, with three (3) rails of at least 2" x 4" size to which shall be secured minimum 1/2 inch thick exterior grade plywood. Posts shall be firmly fixed in the ground at least 30" and thoroughly braced. Top edge of fence shall be trimmed with a rabbeted edge mould. Provide on the street traffic sides of fence, observation openings as directed.
 - 1. GATES - Provide an adequate number of double gates, complete with hardware, located as approved by the Resident Engineer. Double gates shall have a total clear opening of 14'-0" with two (2) 7'-0" hinged swinging sections. Hanging posts shall be 6" x 6" and shall extend high enough to receive and be provided with tension or sag rods for the swinging sections.
 - 2. PAINTING - The fence and gates shall be entirely painted on the street and public sides with one (1) coat of exterior primer and one (1) top coat of exterior grade acrylic-latex emulsion paint. Black stenciled signs reading "POST NO BILLS" shall be painted on fence with three (3) inch high letters on 25 foot spacing for the entire length of fence on street traffic sides. Signs shall be stenciled five (5) feet above the sidewalk.
- C. CHAIN-LINK FENCING shall be minimum 2-inch thick, galvanized steel, chain-link fabric fencing; 8 feet high with galvanized steel pipe posts; minimum 2-3/8-inch OD line posts and 2-7/8-inch OD corner and pull posts, with 1-5/8-inch OD top and bottom rails. Fence shall be accurately aligned and plumb, adequately braced and complete with gates, locks and hardware as required. Under no condition shall fencing be attached or anchored to existing construction or trees.
- D.
 - 1. It shall be the obligation of the Contractor to remove all posters, advertising signs, and markings, etc., immediately.
 - 2. Should the fencing be required to be relocated during the course of the Contract, it shall be done by the Contractor at no additional cost to the City.
 - 3. Where sidewalks are used for "drive over" purposes for Contractor vehicles, a suitable wood mat or pad shall be provided for protection of sidewalks and curbs.
 - 4. Where required, make provision for fire hydrants, lampposts, etc.
 - 5. REMOVAL - When directed by the Resident Engineer, the fence shall be removed.

3.14 RODENT AND INSECT CONTROL:

- A. DESCRIPTION: The Contractor shall provide all labor, materials, plant and equipment, and incidentals required to survey and monitor rodent activity and to control any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. Special attention should be paid to the following conditions or areas:



- 1 Wet areas within the project area, including all temporary structures.
- 2 All exterior and interior temporary toilet structures within the project area.
- 3 All Field Offices and shanties within the project area of all subcontractors and DDC.
- 4 Wherever there is evidence of food waste and/or discarded food or drink containers, in quantity, that would cause breeding of rodents or the insects herein specified.
- 5 Any other portion of the premises requiring such special attention.

B. MATERIALS:

- 1 All materials shall be approved by the New York State Department of Environmental Conservation and comply with the New York City Health Code, OSHA and the laws, ordinances and regulations of State and Federal agencies pertaining to such chemical and/or materials.

C. PERSONNEL:

- 1 All pest control personnel must be supervised by an exterminator licensed in categories 7A and 8.

D. METHODS:

1. Application and dosage of all materials shall be done in strict compliance with the manufacturer's recommendations.
2. Any unsanitary conditions, such as uncollected garbage or debris, resulting from all Contractor's activities, which will provide food and shelter to the resident rodent population shall be corrected by the Contractor immediately after notification of such condition by the Resident Engineer.

E. RODENT CONTROL WORK:

- 1 In wetlands, woodlands and areas adjacent to a stream, special precautions must be taken to protect water quality and to ensure the safety of other wildlife. To prevent poisoned bait from entering streams, no poisoned bait shall be used in areas within seventy-five (75) feet of all stream banks. Live traps must be used in these seventy-five (75) foot buffer zone areas and within wetland and woodland areas.
- 2 In areas outside the seventy-five (75) foot zone of protection adjacent to streams, and in areas outside wetlands and woodlands, tamper proof bait stations with poisoned bait shall be placed during the period of construction and any consumed or decomposed bait shall be replenished as directed.
- 3 At least one month prior to initiation of the construction work, and periodically thereafter, live traps and/or rodenticide bait in tamper proof bait stations, as directed above, shall be placed at locations that are inaccessible to pets, human beings, children and other non-target species, particularly wildlife (for example-birds) in the project area.
- 4 The Contractor shall be responsible for collecting and disposing of all trapped and poisoned rodents found in live traps and tamper proof bait stations. The Contractor shall also be responsible for posting and maintaining signs announcing the baiting of each particular location.
The Contractor shall be responsible for the immediate collection and disposal of any visible rodent remains found on streets or sidewalks within the project area.
- 5 It is anticipated that public complaints will be addressed to the Commissioner. The Contractor, where directed by the Commissioner, shall take appropriate actions, like baiting, trapping, proofing, etc., to remedy the source of complaint within the next six (6) hours of normal working time which is defined herein for the purposes of this section as 7 A.M. to 6 P.M. on Mondays through Saturdays.
- 6 Emergency service during the regular workday hours (Monday through Friday) shall be rendered within 24 hours, if requested by the Commissioner, at no additional cost to the City.

F. EDUCATION & NOTICES:

- 1 The Contractor shall post notices on all Construction Bulletin Boards advising workers, employees, and residents to call the Engineer's Field Office to report any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. The Contractor shall provide and distribute literature pertaining to IPM techniques of rodent control to affected businesses and superintendents of nearby residential buildings to ensure their participation in maintaining their establishments free of unsanitary conditions, harborage removal and rodent proofing.
- 2 Prior to application of any chemicals, the Contractor shall furnish to the Commissioner copies or sample labels for each pesticide, antidote information, and Material Data Safety Sheets (MSDS) for each chemical used.

G. RECORDS

1. The Contractor shall keep a record of all rodent and waterbug infestation surveys conducted by him/her and make available, upon request, to the Commissioner. The findings of each survey shall include, but not be limited to, recommended Integrated Pest Management (IPM) techniques, like baiting, trapping, proofing, etc., proposed for rodent and waterbug pest control.
2. The Contractor shall maintain records of all locations baited along with the type and quantity of rodenticide and insecticide bait used.

3.15 PLANT PEST CONTROL REQUIREMENTS and TREE PROTECTION REQUIREMENTS:

A. Plant Pest Control Requirements: The Contractor and its subcontractors, including the Certified Arborist described below, shall comply with all Federal and New York State laws and regulations concerning Asian Longhorned Beetle (ALB) management, including protocols for ALB eradication and containment promulgated by the New York State Department of Agriculture and Markets (NYSDAM). The Contractor is referred to: (1) Part 139 of Title 1 NYCRR, Agriculture and Markets Law, Sections 18, 164 and 167, as amended, and (2) State Administrative Procedure Act, Section 202, as amended.

1. All tree work performed within the quarantine areas must be performed by New York State Department of Agriculture and Markets (NYSDAM) certified entities. Transportation of all host material, living, dead, cut or fallen, inclusive of nursery stock, logs, green lumber, stumps, roots, branches and debris of a half inch or more in diameter from the quarantine areas is prohibited unless the Contractor or its sub-contractor performing tree work has entered into a compliance agreement with NYSDAM. The terms of said compliance agreement shall be strictly complied with. Any host material so removed shall be delivered to a facility approved by NYSDAM. For the purpose of this contract host material shall be ALL species of trees.
2. Any host material that is infested with the Asian Longhorned Beetle must be immediately reported to NYSDAM for inspection and subsequent removal by either State or City contracts, at no cost to the Contractor.
3. Prior to commencement of tree work, the Contractor shall submit to the Commissioner a copy of a valid Asian Longhorned Beetle compliance agreement entered into with NYSDAM and the Contractor or its sub-contractor performing tree work. If any host material is transported from the quarantine area the Contractor shall immediately provide the Commissioner with a copy of the New York State 'Statement of Origin and Disposition' and a copy of the receipt issued by the NYSDAM approved facility to which the host materials are transported.
4. Quarantine areas, for the purpose of this contract shall be defined as all five boroughs of the City of New York. In addition, prior to the start of any tree work, the Contractor shall contact the

NYC Department of Parks & Recreation's Director of Landscape Management at (718) 699-6724, to determine the limits of any additional quarantine areas that may be in effect at the time when tree work is to be performed. The quarantine area may be expanded by Federal and State authorities at any time and the Contractor is required to abide by any revisions to the quarantine legislation while working on this contract. For further information please contact: NYSDAM (631) 288-1751.

- B. Tree Protection Requirements: The Contractor shall retain a Certified Arborist, as defined by New York City Department of Parks and Recreation (NYCDPR) regulations, to provide the services described below.
1. Surveys and Reports: The Certified Arborist shall, at the times indicated below, conduct a survey and prepare a plant material assessment report which includes: (1) identification, by species and pertinent measurements, of all plant material located on the project site, or in proximity to the project site, as described below, including all trees, significant shrubs and/or planting masses; (2) identification and plan for the containment of plant pests and pathogens, including the ALB, as described in paragraph A above; (3) evaluation of the general health and condition of any infected plant material.
 2. Frequency of Reports: The Certified Arborist shall conduct a survey and provide a plant material assessment report at two (2) points in time: (1) prior to the commencement of construction work; and (2) at the time of substantial completion. In addition, for projects exceeding 24 months in duration, the Certified Arborist shall conduct a survey and prepare a report at the midpoint of construction. Copies of each plant material assessment report shall be submitted to the Resident Engineer within two (2) weeks of the survey.
 3. Proximity to Project Site: Off-site trees, significant shrubs and/or planting masses shall be considered to be located in proximity to the project site under the circumstances described below.
 - a. The tree trunk, significant shrub, or primary cluster of stems in a planting mass is within 50 (fifty) feet of the project's Contract Limit Lines (CLLs) or Property Lines (PLs).
 - b. Any part of the tree or shrub stands within 50 (fifty) feet of: (a) a path for site access for vehicles and/or construction equipment; or (b) scaffolding to be erected for construction activity, including façade remediation projects.
 - c. The Certified Arborist determines that the critical root zone (CRZ) of an off-site tree, significant shrub, or primary cluster of stems in a planting mass extends into the project site, whether or not that plant material is located within the 50-foot inclusionary perimeter as outlined above.
 4. Tree Protection Plan: The Certified Arborist shall prepare, and the Contractor shall implement, a Tree Protection Plan, for all trees that may be affected by any construction work, excavation or demolition activities, including without limitation, (1) on-site trees, (2) street trees, as defined below, (3) trees under NYCDPR jurisdiction as determined by the Department of Transportation, and (4) all trees that are located in proximity to the project site, as defined above. The Tree Protection Plan shall comply with the NYC DPR rules, regulations and specifications. The Contractor is referred to Chapter 5 of Title 56 of the Official Compilation of the Rules of the City of New York. Copies of the Tree Protection Plan shall be submitted to the Resident Engineer prior to the commencement of construction. Implementation of the Tree Protection Plan for street trees and trees under NYCDPR jurisdiction shall be in addition to any tree protection requirements specified or required for the project site. For the purpose of this article, a "street tree" means the following: (1) a tree that stands in a sidewalk, whether paved or unpaved, between the curb lines or lateral lines of a roadway and the adjacent property lines

of the project site, or (2) a tree that stands in a sidewalk and is located within 50 feet of the intersection of the project's site's property line with the street frontage property line.

- C. No Separate Payment. No separate payment shall be made for compliance with Plant Pest Control Requirements or Tree Protection Requirements. The cost of compliance with Plant Pest Control Requirements and Tree Protection Requirements shall be deemed included in the Contractor's bid for the Project.

3.16 PROJECT IDENTIFICATION SIGNAGE:

- A. The Contractor shall provide, install and maintain Project identification and other signs where indicated to inform public and individuals seeking entrance to the Project.
- B. In order to properly convey notice to persons entering upon a City construction site, the Contractor shall furnish and install a sign at the entrance (gates) as follows:

NO TRESPASSING

AUTHORIZED PERSONNEL ONLY

- C. If no construction fence exists at the site, this notice shall be conveyed by incorporating the above language into safety materials (barriers, tape, and signs).
- D. Provide temporary, directional signs for construction personnel and visitors.
- E. Maintain and touch up signs so that they are legible at all times.

3.17 PROJECT CONSTRUCTION SIGN AND RENDERING:

- A. PROJECT SIGN:
 - 1 Responsibility: The Contractor shall produce and install one (1) project sign which shall be posted and maintained upon the site of the project at a place and in a position directed by the Commissioner. The Contractor shall protect the sign from damage during the continuance of work under the Contract and shall do all patching of lettering, painting and bracing thereof necessary to maintain the sign in first class condition and in proper position. Prior to fabrication, the Contractor shall submit an 8-1/2" x 11" color match print proof from the sign manufacturer of the completed sign for approval by the Commissioner.
 - 2 Sign Quality: The Contractor shall provide all materials required for the production of the sign as specified herein. Workmanship shall be of the best quality, free from defects and shall be produced in a timely manner.
 - 3 Schedule: Upon project mobilization, the Contractor shall commence production and installation of the sign.
 - 4 Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project sign away from the site.
 - 5 Sign construction:
 - a. Frame: The frame shall be from quality dressed 2"x2" pine, fire retardant, pressure treated lumber, that surrounds the inside back edge of the sign. The sign shall have one (1) intermediate vertical and two (2) diagonal supports, glued and screwed for rigidity. Frame shall be painted white with two (2) coats of exterior enamel paint, prior to mounting of sign panel.
 - b. Edging: U-shaped, 22 gauge aluminum edging, with a white enameled finish to match sign



background, shall run around entire edging of sign panel and frame. Corners shall be mitered for a tight fit. Channel dimensions shall be 1" inch (overlap to sign panel face) x 1 3/4" (or as required across frame depth) x 1" (back overlap).

- c. Sign Panel: 4' x 8' panel shall be constructed in one (1) piece of 14 gauge (.0785") 6061-T6 aluminum. This panel shall be pre-finished both sides with a glossy white baked-on enamel finish and be flush with edge of 2" x 2" wood frame. Samples must be submitted for approval.
- d. Fastening: Fasten sign panel to wood frame using cadmium plated no. 8 sheet metal screws at 1/2" below edge of panel and 8" on center. The U-shaped aluminum channel shall be applied over the wood frame edge and fastened with cadmium plated no. 8 sheet metal screws at 12" on center around the entire perimeter.

6 Sign Graphics:

- a. A digital file of the project sign will be provided to the Contractor by the Commissioner's representative for printing. The Commissioner's representative shall insert the project name and names and titles of personnel (3 or more) and any other required information associated with the project. All signs may include a second panel for a project rendering as described in Sub-Section 3.17.B herein.
- b. The digital file shall be reproduced at the Sign Panel size of 4' x 8' on 3M High Performance Vinyl or approved equal. The 3M High Performance Vinyl or equivalent shall be guaranteed for nine (9) years. Guarantee must cover fading, peeling, chipping or cracking. The sign manufacturer is required to maintain all specified Pantone Matching System (PMS) type and other composition elements represented in the digital file of the project sign.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.17 B

B. PROJECT RENDERING:

1. Responsibility: In addition to the Project Sign, the Contractor shall furnish and install one (1) sign showing a rendering of the project. A digital file of the project rendering will be provided to the Contractor by the Commissioner's representative. From an approved image file provided by DDC, the Project Rendering is to be sized, printed, and mounted in an identical manner as described in Sub-Section 3.17.A above for the Project Sign. A color match print proof from the sign manufacturer of the Rendering Sign printed from the supplied file is to be submitted to DDC for approval before fabrication. The Rendering Sign is to be posted at the same height as the Project Sign. Where possible, the Rendering Sign shall be mounted with a perfect match of the short sides of the rectangle so that the Rendering Sign and the Project Sign together will create one long rectangle.
2. Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project rendering away from the site.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.18

3.18 SECURITY GUARDS/FIRE GUARDS ON SITE:

A. SECURITY GUARDS (WATCHMEN):

1. The Contractor shall provide competent Security Guard Service on the site, beginning on the date on which the Contractor commences actual construction work, or on such earlier date on which there is activity at the site related to the work, including without limitation, delivery of



materials or construction set-up. The Contractor shall continue to provide such Security Guard Service until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. Throughout the specified time period, there shall be no less than one (1) Security Guard on duty every day, including Saturdays, Sunday and Holidays, 24 hours a day, except between the hours of 8:00 A.M. and 4:00 P.M. on any day which is a regular working day for a majority of the trade subcontractors. This exception during the working day shall not apply after the finishing painting of the plaster work is commenced; thereafter, not less than one (1) Security Guard shall be on duty continuously, 24 hours a day.

2. Every Security Guard shall be required to hold a "Certificate of Fitness" issued by the Fire Department. Every Security Guard shall, during his/her tour of duty, perform the duties of Fire Guard in addition to his/her security obligations.
3. Should the Commissioner find that any Security Guard is unsatisfactory; such guard shall be replaced by the Contractor upon the written demand of the Commissioner.
4. Each Security Guard furnished by the Contractor shall be instructed by the Contractor to include in his/her duties the entire construction site including the Field Office, temporary structures, and equipment, materials, etc.
5. Should the Contractor or any other subcontractor consider the security requirements outlined above inadequate, the Contractor shall provide such additional security as it thinks necessary, after obtaining the written consent of the Commissioner. The additional cost of such approved increased protection will be paid by the Contractor.
6. Nothing contained in this Sub-Section shall diminish in any way the responsibility of the Contractor and each subcontractor for its own work, materials, tools, equipment, nor for any of the other risks and obligations outlined hereinbefore in this Article.

- B. **COSTS** - The Contractor shall employ Security Guards/Fire Guards throughout the specified time period, except as otherwise modified by the detailed Specifications and as approved by the Commissioner, for the purpose of safeguarding and protecting the site. All costs for Security Guards/Fire Guards shall be borne by the Contractor.
- C. **RESPONSIBILITY** - The Contractor and its subcontractors will be responsible for safeguarding and protecting their own work, materials, tools and equipment.

3.19 SAFETY:

- A. The Contractor, in compliance with requirements of Section 01 35 26, **SAFETY REQUIREMENTS PROCEDURES**, shall provide and maintain all necessary temporary closures, guard rails, and barricades to adequately protect all workers and the public from possible injury. Any removal of these items, during the progress of the work, shall be replaced by the Contractor at no additional cost to the City.

END OF SECTION 01 50 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text

SECTION 01 54 11
TEMPORARY ELEVATORS AND HOISTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
1. Temporary Use, Operation and Maintenance of Elevators during Construction
 - a. For New buildings up to 15 Stories
 - b. For New buildings over 15 Stories
 - c. For Existing Buildings
 2. Temporary Construction Hoists and Hoist ways (For Material and Personnel)

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
B. Section 01 42 00 REFERENCES
C. Section 01 50 00 TEMPORARY FACILITIES AND CONTROLS
D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
E. Section 01 77 00 CLOSE OUT PROCEDURES

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.1

3.1 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDINGS UP TO AND INCLUDING 15 STORIES:

- A. **INSTALLATION:** The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, one (1) selected main elevator for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevator in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevator and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.
- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.



- C. **COSTS:** The Contractor shall be responsible for all costs in connection with the temporary elevator, including without limitation: (1) installing and operating the temporary elevator, (2) maintaining the temporary elevator in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevator, (4) replacing the temporary elevator or any equipment or parts utilized in connection therewith, if required, due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevator, (6) providing all electric power required to operate the temporary elevator, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevator, and (8) providing all labor for the operation and maintenance of the temporary elevator, including on an overtime basis if necessary. The total Contract Price shall include all costs in connection with the temporary elevator, including without limitation, the costs specified herein.
- D. **COMMENCEMENT OF SERVICE:** The Contractor shall begin to provide temporary elevator service using the selected main passenger elevator no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or a temporary enclosure meeting the requirements of the law.
 2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks and any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room roof slab or that portion of its surrounding the elevator has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the machine room to the low voltage transformers and car light outlets in the center of shaft way and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- F. **REMOVAL:** When elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment and promptly proceed with the installation of the permanent equipment as required under the Contract.
- G. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection deems it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables and new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.



- H. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned. Where lubricated rails are used they shall be washed down. If roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- I. **LIMITATIONS ON USE:** The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- J. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this section beginning with the 41st working day after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDING OVER 15 STORIES:

- A. **INSTALLATION:** The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, two (2) selected main elevators for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevators in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevators and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use. The two (2) elevators shall not be operated simultaneously.
- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevators and all equipment and/or parts utilized in connection therewith.
- C. **COSTS:** The Contractor shall be responsible for all costs in connection with the temporary elevators, including without limitation: (1) installing and operating the temporary elevators, (2) maintaining the temporary elevators in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevators, (4) replacing the temporary elevators or any equipment or parts utilized in connection therewith, if required due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevators, (6) providing all electric power required to operate the temporary elevators, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevators, and (8) providing all labor for the operation and maintenance of the temporary elevators, including on an overtime basis if necessary. The total Contract Price shall



include all costs in connection with the temporary elevators, including without limitation, the costs specified herein.

- D. **LOW RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service using one (1) selected main passenger elevator no later than six (6) weeks (30 working days) after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. No later than one (1) week, five (5) working days, after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped the following work shall have been completed:
1. The shaft shall have been completely enclosed up to the 12th Floor by either the permanent or a temporary enclosure meeting the requirements of the law.
 2. A temporary machine room enclosure shall have been provided at the 11th Floor and shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors up to and including the 9th Floor at the shaft entrances to the elevator, solid substantial wood frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor not later than 10 calendar days after the 12th Floor slab or that portion of it surrounding the elevator, has been poured and stripped, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the temporary machine room, to the low voltage transformers and car light outlets in the center of the shaftway and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the Equipment is declared ready for such connections by the Resident Engineer.
- F. **HIGH RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service to all floors, using a selected main passenger elevator, no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed, the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or temporary enclosure, meeting the requirements of the law.
 2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed, solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- G. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room slab or that portion of it surrounding the elevator shaft has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the high rise elevator to be used for



temporary service and shall have connected such feeders to the terminals on the motor-generator starter panels or controllers in the machine room, to the signal circuits low voltage transformers for the annunciators and car light outlets in the center of shaft way. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.

- H. When the high rise elevator is completed and ready for temporary operation, the low rise temporary elevator shall be shut down.
- I. **REMOVAL:** When one (1) or more elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment, and promptly proceed with the installation of the permanent equipment as required under the Contract.
- J. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection determines it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables, new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- K. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installations that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheaves spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be removed from the rails. The full cost of parts replacement cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- L. **LIMITATIONS ON USE:** The temporary elevators shall not be used during their operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- M. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this Section beginning with the 31st working day after the 12th Floor slab, or that portion of the 12th Floor slab surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR EXISTING BUILDINGS:

- A. The Contractor may use, at the Commissioner's discretion, one (1) selected elevator in the building for temporary operation by the Contractor for the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction over the work at the Project. The operation of the temporary elevator and all equipment and/or parts utilized in

connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.

- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.
- C. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the elevator for temporary operation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- D. **LIMITATIONS ON USE:** The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- E. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide elevator services described in this section beginning with 15 consecutive calendar days from Notice to Proceed. This charge will be deducted from any amount due and owing to the Contractor.

3.4 TEMPORARY HOISTS AND HOISTWAYS (FOR MATERIAL AND PERSONNEL):

- A. **RESPONSIBILITY:** The Contractor shall provide adequate numbers of material hoists for the most expeditious performance of all parts of the work including the work of all its subcontractors.
- B. **LOCATIONS:** No hoists shall be constructed at such locations as will interfere with, or affect the construction of, floor arches, or the work of subcontractors. The hoists may be located at the exterior sides of the structure or in the courtyard and extend upward adjacent to the line of window openings. The hoists shall be located a sufficient distance from the exterior walls and be so protected as to prevent any of the permanent work from being damaged, stained or marred.
- C. **ELEVATOR SHAFT:** Wherever possible, one or more of the permanent elevator shafts may be used as temporary hoist ways, providing such use complies with the requirements of the Building Code of the City of New York and has been approved by the Commissioner, and providing further it entails no interference with the progress of the work.
- D. **PROTECTION FOR INTERIOR HOISTS:** All interior material hoist ways shall be enclosed on each floor and shall be adequately protected with appropriate safety guards. In no event shall the protection be less than that required by law.

END OF SECTION 01 54 11



SECTION 01 54 23
TEMPORARY SCAFFOLDING AND PLATFORMS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Section 01 35 26: Safety Requirements Procedures.
- C. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Temporary Scaffolding and Platforms, including:
 - 1. Conformance
 - 2. Responsibility
 - 3. Jobsite Documentation and Submittals
 - 4. Inspections
- B. This Section governs ALL scaffold used on DDC project sites including, but not limited to, Suspended Scaffold, Supported Scaffold and Sidewalk Sheds.

1.3 CONFORMANCE:

- A. Unless otherwise indicated, the Contractor is responsible for providing, erecting, installing and maintaining all temporary scaffolding and platforms which shall comply with requirements of Chapter 33 (Safeguards During Construction or Demolition) of the NYC Building Code, NYC Local Law 52 of 2005, OSHA Construction Standard 1926 Subpart L, and furnishing the items and personnel set forth in this section.

1.4 RESPONSIBILITY:

- A. Jobsite Safety Coordinator: The Contractor shall designate and employ a Jobsite Safety Coordinator, who shall be a competent person, who shall have a daily presence on the project site during scaffold use. This designee must possess and maintain a valid New York City Department of Buildings supported scaffold certificate of completion. An alternate shall also be designated, in the event that the Jobsite Safety Coordinator is absent. The Jobsite Safety Coordinator shall:
 - 1. Verify completeness of documentation and submittals (as described below).
 - 2. Verify that inspections are performed, including pull tests (see below), reports are filed and reported deficiencies are corrected.
 - 3. Monitor trades using scaffold.
 - 4. Limit access to scaffold areas that are tagged for non-use.
 - 5. Inform trades of scaffold load limitations.
 - 6. Monitor loading of decks.
 - 7. Verify that any ties that are temporarily removed are properly restored in the same shift.
 - 8. Verify that outriggers and planks that are moved are properly set up and secured.
 - 9. Verify that all scaffold decks in use have proper access/egress.
 - 10. Verify that all open sides of decks in excess of 14 inches have proper guardrails and toe-boards.



11. Notify appropriate parties, including but not limited to the Resident Engineer, site safety coordinator / monitor, site safety consultant, scaffold users, contractor and the scaffold engineer, of misuses, non-conformances, hazards and accidents.
 12. Keep a log of significant actions and events connected with the scaffolding.
- B. The Contractor shall be responsible for erecting, maintaining and dismantling the scaffolding and/or sidewalk shed in conformance with requirements of the New York City Building Code, OSHA and the Contract documents, including the specifications. The Contractor shall also be guided by generally accepted standards of scaffold industry practice as promulgated by the Scaffold Industry Association.
- C. The Contractor shall require the subcontractor responsible for erecting the scaffolding to engage a Scaffold Engineer, licensed as a professional engineer by the State of New York. The Scaffold Engineer shall be responsible to ensure the following: (1) that the installation design is in compliance with requirements of the New York City Building Code and OSHA, (2) that the design comports with the capabilities of the components and the characteristics of the site, (3) that scaffold loads on the host building, including netting, have been properly considered, and (4) that the design documents provide accurate information for erectors and users.
- D. Scaffold users are trade contractors assigned to work on the scaffold. Training certificates from a New York City Department of Buildings approved training provider are mandatory. These users have the duty to become familiar with the New York City Building Code and OSHA requirements germane to users, to obey the instructions of the Jobsite Safety Coordinator and to inform the Jobsite Safety Coordinator of known hazards, non-conformances or violations.

1.5 JOBSITE DOCUMENTATION AND SUBMITTALS:

The Contractor shall prepare, obtain and submit the following to the Resident Engineer:

- A. NYC Department of Buildings permit(s) for scaffold and sidewalk sheds (as applicable) including filing applications signed and sealed by a Professional Engineer licensed in the State of New York;
- B. Site logistics plan / site safety plan;
- C. Installation drawing(s), design and product data to be provided for **all** scaffold(s) and shed(s) must include, at a minimum:
 1. Plan(s);
 2. Elevation(s);
 3. Duty load designation; "standard" (150 psf live load) or "heavy duty" (300 psf live load).
 4. Details including base support, anchors and ties;
 5. Notes and specifications including load limits, number of planked levels, tie spacing, netting, and sequence of installation and removal.
 6. Anchorage into sound material.
 7. Load limits based on pull tests;
 8. Specifications for pull test(s), method, proof load and the number of trials;
 9. Elevations, levels or heights, where anchorage is made into masonry;
 10. Specifications for frames, planks, screw jacks, anchors, and any other ancillary hardware;
 11. Samples for anchors, ties and netting;
 12. Sequence of operations for erection and demolition;
 13. Location plan, heights, widths, "jumps" over doorways and driveways;
 14. Specify size, maximum span and maximum spacing of headers and stringers;
 15. Specify legs, girts, braces, nailing and connections;
 16. All sidewalk sheds shall be designed, engineered, signed and sealed by a Professional Engineer licensed in the State of New York;
 - a. Generic (not job specific) engineering drawings are satisfactory for standard sheds and arrangements.

- b. Special engineering is required for custom sheds, site-specific problems or non-standard arrangements.

1.6 INSPECTIONS:

- A. Signed inspection reports shall be issued for each inspection and pull-test below, and shall be logged and maintained on site by the Jobsite Safety Coordinator for the duration of the project.
- B. Pull testing shall be required during design, and during or post erection, where anchorage is made into masonry. The Scaffold Engineer shall specify the test method, proof load and the number of trials.
- C. Sidewalk sheds shall be inspected after initial installation, major modification, or damage and thence every three months. Inspections shall be by a Scaffold Engineer for custom sheds and by a Competent Person employed by the Contractor for standard sheds.
- D. Scaffolds shall be inspected by the Scaffold Engineer during erection, post-erection and prior to use and thence every three months. The Scaffold Engineer shall repeat inspections after major alteration/modification, damage.
- E. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling, and the condition and integrity of the sidewalk sheds after high winds, major storms and at least once per month during usage.
- F. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling at least weekly, and the condition and integrity of the scaffold after high winds, major storms and at least once per month during usage.
- G. Scaffolds and Sidewalk Sheds shall be inspected daily by the Jobsite Safety Coordinator or alternate prior to use by scaffold users. The inspection results must be recorded in the maintenance log, and be available on-site at all times.
- H. At the completion of the project, submit all inspection documents as Miscellaneous Record Documents in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.

1.7 LADDERS AND STAIRS:

- A. The Contractor shall provide and maintain ladders or temporary stairs extending from the street to the first story, and to and from every floor and roof level of the project.

1.8 ACCESS AND EXITS:

- A. The ladders or temporary stairs shall be of acceptable size, number and location, so that proper and convenient access may be had by those required to proceed to and from all parts of the project.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 54 23



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text

TEMPORARY SCAFFOLDING AND PLATFORMS

01 54 23 - 4



SECTION 01 73 00

EXECUTION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes general procedural requirements governing execution of the Work including without limitation the following:
1. Delivery of Materials
 2. Contractor's Superintendent
 3. Surveys
 4. Borings
 5. Examination
 6. Environmental Assessment
 7. Preparation
 8. Deferred Construction
 9. Installation
 10. Permits
 11. Transportation
 12. Sleeves and Hangers
 13. Sleeve and Hanger Drawings
 14. Cutting and Patching
 15. Location of Partitions
 16. Furniture and Equipment
 17. Removal of Rubbish and Surplus Material
 18. Cleaning
 19. Security And Protection of Work Site
 20. Maintenance of Site and Adjoining Property
 21. Maintenance of Project Site
 22. Safety Precautions for Control Circuits
 23. Obstructions in Drainage Lines

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| D. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT & DISPOSAL |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |



1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 QUALITY ASSURANCE:

- A. Land Surveyor Qualifications: A professional land surveyor who is licensed in the State of New York and who is experienced in providing land-surveying services of the kind indicated.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 DELIVERY OF MATERIALS:

- A. Material Orders: The Contractor shall furnish to the Commissioner a copy of each material order, indicating date of order and quantity of material, and shall also notify the Commissioner when materials have been delivered to the site and in what quantities.
- B. Ample Quantities: The Contractor shall deliver materials in ample quantities to insure the most prompt and uninterrupted progress of the work so as to complete the work within the Contract time.
- C. Containers: The manufacturer's containers shall be delivered with unbroken seals and shall bear proper labels.
- D. Deliveries: The Contractor shall coordinate deliveries in order to avoid delaying or impeding the progress of the work.
- E. Handling: The Contractor shall provide equipment and personnel to handle products by methods to prevent soiling or damage.
 - 1. Promptly inspect shipments to assure products comply with requirements, quantities are correct, and products are undamaged.
 - 2. Promptly return damaged shipments or incorrect orders to manufacturer.
 - 3. For materials or equipment to be reused or salvaged, use special care in removal, storage and reinstallation to insure proper function in completed work.
- F. Storage: Store products in accordance with provisions of Article 3.1, and periodically inspect to assure that stored products are undamaged and are maintained under required conditions.
- G. Stacking: All materials shall be properly stacked in convenient places adjacent to the site, or where directed, and protected in a satisfactory manner. Stacked materials shall be so arranged as to not interfere with visibility of traffic control devices.
- H. Overloading: If authority is given to store materials in any part of the project area, they shall be so stored as to cause no overloading.



- I. **No Interference:** If it becomes necessary to remove and restack materials to avoid impeding the progress of any part of the work or interfering with the work to be done by any trade subcontractor, the Contractor shall remove and restack such materials at no additional cost to the City.

3.2 CONTRACTOR'S CONSTRUCTION SUPERINTENDENT:

- A. **Contractor's Construction Superintendent:** The Contractor shall devote its time and personal attention to the work and shall employ and retain at the project site, from the commencement until the entire completion of the work, a Contractor's Construction Superintendent. The Contractor's Construction Superintendent shall be registered with the New York City Department of Buildings in compliance with the Construction Superintendent Rule of the City of New York and shall be competent and capable of maintaining proper supervision and care of the work and shall be acceptable to the Commissioner. The Construction Superintendent shall, in the absence of the Contractor, and irrespective of any superintendent or foreman employed by any subcontractor, shall see that the instructions of the Commissioner are carried out.
- B. **Replacement:** The Contractor's Construction Superintendent on the job shall not be changed or removed without the consent of the Commissioner.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 SURVEYS:

- A. **Line and Grade:** The City will establish a baseline and bench mark near the site of the work for use of the Contractor in connection with the performance of the work.
- B. **Responsibility:** The Contractor shall establish all other lines and elevations required for its work and shall be solely responsible for the accuracy thereof.
- C. **Safeguard All Points:** The Contractor shall safeguard all points, stakes, grade marks and bench marks made or established by the Contractor on the work, shall re-establish same if disturbed and bear the entire expense of rectifying the work improperly installed due to not maintaining, not protecting or removing without authorization such established points, stakes, or marks.
- D. **City Monuments and Markers:** No work shall be performed near City monuments or marks so as to disturb them until the said monuments or marks have been referenced or reset or otherwise disposed of by the relevant Agency or party who installed them.
- E. **Foundations:** The Contractor shall furnish certification from a licensed Surveyor that all portions of the foundation work are located in accordance with the Contract Drawings and at the elevations required thereby. This certification shall show the actual locations and the actual elevations of all the work in relation to the locations and elevations shown on the Contract Drawings, including but not restricted to the following:
 1. The locations and elevations of all piles, if any.
 2. Elevations of tops of all spread footings, tops of pile caps, and tops of all foundation walls, elevator pit walls and ramp walls.
 3. Location of all footing centers and pier centers including those for exterior wall columns.
 4. Location of all foundation walls including wall columns, elevator pit walls and ramp walls.
- F. **Wall Lines:** After the first courses of masonry or stone have been laid, the Contractor shall establish the permanent lines of exterior walls. The Contractor shall furnish promptly, certification from a licensed Surveyor, in the form of signed original drawings showing the exact location of such wall lines, of all portions of all structures. Except at its own risk, the Contractor shall not proceed further with the erection of walls until the Surveyor's certification has been submitted and verified for correct location of wall lines.



- G. Surveyor: The Surveyor selected for any of the purposes mentioned in Paragraph E and Paragraph F above, and Paragraph I below, shall be a land Surveyor licensed in the State of New York and shall be subject to the approval of the Commissioner. The Surveyor shall not be a regular employee of the Contractor, nor shall the Surveyor have any interest in the Contract. The Surveyor shall not be employed by the Contractor in laying out any work, it being intended that the Surveyor's certification shall represent an independent and disinterested verification of such layout. The Surveyor shall report to the Department of Design and Construction's Resident Engineer each time upon arrival to and departure from the site and review with the Resident Engineer the data required for the project.
- H. Final Certification: Final certification shall be submitted upon completion of the work or upon completion of any subdivision of the work as directed by the Commissioner. Any exceptions or deviations from the drawings shall be noted on the final certificate and there shall be included any maps, plates, notes, pertinent documents and data necessary, in the opinion of the Commissioner, to constitute a full and complete report.
- I. Final Survey: The Contractor shall submit to DDC for submission to the Department of Buildings a final Survey by the licensed Surveyor showing the location of the new Structure, before completion of the Structure. This Survey shall show the location of the first tier of beams or of the first floor; the finish grades of the open spaces on the plot; the established curb level and the location of all other Structures on the plan, together with the location and boundaries of the lot or plot upon which the Structure is constructed, curb cuts, all yard dimensions, etc.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 BORINGS:

- A. The work of this article shall be the responsibility of the Contractor unless otherwise indicated.
- B. Reference Drawings: The Boring Drawings as listed on the title sheet are for information to the bidder and are to be used under the conditions as follows:
 - 1. Boring Logs: shown on the Boring Drawings, record information obtained under engineering supervision in the course of exploration carried out by or under the direction of forces of the Department of Design and Construction at the site.
 - 2. Soils and Rock Samples: All inferences are drawn from the indications observed as made by engineering and scientific personnel. All such inferences and all records of the work including soil samples and rock cores, if any, are available to bidders for inspection.
 - 3. Certification of Samples: The City certifies that the work was carried out as stated, and that the soil samples and rock cores, if any were referred to, were actually taken from the site at the times, places and in the manner indicated. The samples are available for inspection in the Department of Design and Construction Subsurface Exploration Section.
 - 4. Bidder's Responsibility: The bidder, however, is responsible for any conclusions to be drawn from the work. If the bidder accepts those of the City, it must do so at its own risk. If the bidder prefers not to assume such risk, the bidder is under the obligation of employing its own experts to analyze the available information, and must be responsible for any consequences of acting on their conclusions.
 - 5. Continuity Not Guarantee: The City does not guarantee continuity of conditions shown at actual boring locations over the entire site. Where possible, borings are located to avoid all obstructions and previous construction which can be found by inspection of the surface and the bidder is required to estimate the influence of such features from its own inspection of the site.



3.5 EXAMINATION:

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
 - 1. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground utilities and other construction indicated as existing are not guaranteed. Before beginning site work, investigate and verify the existence and location of underground utilities and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; and underground electrical services.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with the subcontractor responsible for installation or application present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 - 1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
 - 2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 3. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 - 4. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.6 ENVIRONMENTAL ASSESSMENTS:

- A. City Responsibilities: An Environmental Assessment and survey is performed by the NYC DDC and its findings are included in the Contract Documents. In accordance with the NYC Administrative Code Title 15 Chapter 1 an asbestos survey is required to be performed by an Asbestos Investigator certified by the NYC Department of Environmental Protection (DEP) to identify the presence of asbestos containing material (ACM) prior to any alteration, renovation or demolition activity. The findings of such survey are required for the submission of approvals and permits issued by the NYC Department of Buildings (DOB). When the findings indicate that asbestos containing material is present and will be disturbed during the alteration, renovation or demolition activity then abatement design specifications will be incorporated into the contract documents. The Contractor shall comply with all federal, state and local asbestos regulations affecting the work for this Contract.
- B. Contractor Responsibility: The Contractor shall comply with all federal, state and local environmental regulations, including without limitation USEPA and OSHA regulations which require the Contractor to assess if lead based paint will be disturbed during the work in order to protect his/her workers and the building occupants from migration of lead dust into the air. The Contractor shall comply with all federal, state and local environmental waste disposal regulation which may be required during the work. The Contractor is required to hire licensed abatement and disposal companies for the requisite work.

3.7 PREPARATION:

- A. Field Measurements: The Contractor shall verify all dimensions and conditions on the job so that all work will properly join the existing work.
- B. The Contractor, before commencing work, shall examine all adjoining work on which its work is in any way dependent on good workmanship in accordance to the intent of the Specifications and the Contract



Drawings. The Contractor shall report to the Commissioner any condition that will prevent it from performing work that conforms to the required standard.

- C. Existing Utility Information: Furnish information to the Commissioner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- D. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

3.8 DEFERRED CONSTRUCTION:

- A. Where necessity for deferred construction is certified by the Commissioner, in order to permit the installation of any item or items of equipment required to be furnished and installed concurrent with the time allowed for doing and completing the work of the Contract, the Contractor shall defer construction work limited to adequate areas as approved by the Commissioner.
- B. The Contractor shall confer with the affected trade subcontractors and ascertain arrangements, time and facilities necessary to be made by the Contractor in order to execute the provisions specified herein.

3.9 INSTALLATION:

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work and work of trade subcontractors to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by the Design Consultant.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.10 PERMITS:

- A. The Contractor shall comply with all local, state and federal laws, rules and regulations affecting the Work of this Project, including, without limitation, (1) obtaining all necessary permits for the performance of the Work prior to commencement thereof, and (2) complying with all requirements for the disposal of demolition and/or construction debris, waste, etc., including disposal in City landfills. The Contractor shall be responsible for all costs in connection with such regulatory compliance, unless otherwise specified in the Contract.

3.11 TRANSPORTATION:

- A. Availability: It shall be the duty of the Contractor to determine the availability of transportation facilities and dockage for the use of its employees, equipment and material and the conditions under which such use will be permitted.
- B. Costs: If transportation facilities and dockage are available and are permitted to be used by the governmental agency having jurisdiction, the Contractor shall pay all necessary costs and expenses, and abide by all rules and regulations promulgated in connection therewith.
- C. Vehicles: With respect to the use of vehicles on highways and bridges, the Contractor's attention is directed to the limitations set forth in the Rules of the City of New York, Title 34, Chapter 4, Section 4-15.
- D. Continued Use: It is understood that the Commissioner makes no warranty as to the continued use by the Contractor of such facilities.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.12

3.12 SLEEVES AND HANGERS:

- A. Coordinate with Progress Schedule: The Contractor shall promptly furnish and install conduits, outlets, piping sleeves, boxes, inserts and all other materials and equipment that is to be built into the work in conformity with the requirements of the project.
- B. Cooperation of Subcontractors: All subcontractors shall fully cooperate with each other in connection with the performance of the above work as "cutting in" new work is neither contemplated nor will it be tolerated.
- C. Timeliness: In the event that timely delivery of sleeves and other materials cannot be made, and to avoid delay, the Contractor may arrange to have boxes or other forms set at the locations where the piping or other material is to pass through or into the slabs, walls or other work. Upon the subsequent installation of the sleeves or other material, the Contractor shall fill around them with materials as required by the Contract. The necessary expenditures incurred for the boxing out and filling in shall be borne by the Contractor.
- D. Inserts: The Contractor is to install strip inserts four (4) foot on center and perpendicular to beams in ceiling slabs of boiler, machine and mechanical equipment rooms. Inserts are to be installed for strippable concrete slabs only.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 SLEEVE AND PENETRATION DRAWINGS:

- A. As soon as practicable after the commencement of work and when the order in which concrete for the first slabs, walls, etc. to be poured is determined, the Contractor shall submit to the DDC a sketch indicating the location and size of all penetrations for sleeves, ducts, etc. which will be required to accommodate the mechanical trades, in order to determine if such penetrations will materially weaken the project's structure. The sketch shall be stamped and returned if approved and/or comments will be transmitted. The Contractor shall continue to submit sketches as the pouring schedule and the concrete work progresses and, until approvals for the penetration sketches have been given. The Contractor shall not predicate its layout work on unapproved sketches.

3.14 CUTTING AND PATCHING:

- A. Responsibility: The Contractor shall do all cutting, patching and restoration required by its work, unless otherwise particularly specified in the Specifications.
- B. Restore Work: The Contractor shall restore any work damaged during the performance of the work.
- C. Competent Workers: All restoration work shall be done to the satisfaction of the Commissioner by competent workers skilled in the trade required by such restoration. If, in the judgment of the Commissioner, workers engaged in restoration work are incompetent, they shall be replaced immediately by competent workers.
- D. Structural Elements: Do not cut and patch structural elements without the prior approval, in writing, of the Resident Engineer.
- E. Operational Elements: Do not cut and patch operating elements and related components.
- F. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in a manner that would, in Commissioner's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- G. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.
- H. Removals: The Contractor must remove from the premises all demolished materials of every nature or description resulting from cutting, patching and restoration work, in accordance with the requirements hereinafter stipulated under Sub-Section 3.17 herein and as further required in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.15

3.15 LOCATION OF PARTITIONS:

- A. Within three (3) weeks after the concrete slabs have been poured on each floor level, the Contractor shall immediately locate accurately all of the partitions, including the door openings, on the floor slabs in a manner approved by the Resident Engineer.

3.16 FURNITURE AND EQUIPMENT:

- A. Responsibility: The Contractor is responsible for moving all loose furniture and/or equipment in all areas where the location of such furniture and/or equipment interferes with the proper performance of its work.
- B. Protection: All such furniture and/or equipment must be adequately protected with dust cloths and returned to their original locations when directed to do so by the Resident Engineer.

3.17 REMOVAL OF RUBBISH AND SURPLUS MATERIALS:

- A. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized. Comply with requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- B. Rubbish: Rubbish shall not be thrown from the windows or other parts of the project. Mason's rubbish, dirt and other dust-producing material shall be wetted down periodically.
- C. Location: The Contractor shall clean Project site and work area daily and sweep up and deposit, at a location designated on each floor, all of its rubbish, debris and waste materials, as it accumulates and when directed by the Resident Engineer. Wood crating shall be broken up, neatly bundled, tied and stacked ready for removal and be deposited at a location designated on each floor.
 - 1. Comply with requirements in NYC Fire Department for removal of combustible waste materials and debris.
 - 2. Do not hold materials more than 7 days during normal weather or 3 days if the temperature is expected to rise above 80 degrees F (27 degrees C).
 - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- D. Laborers: The Contractor shall be responsible for the removal of all rubbish, etc., from the site. The Contractor shall remove from the designated locations all piles of rubbish, debris, waste material and wood crating as they accumulate and when directed by the Resident Engineer, and shall remove them from the site. The Contractor shall employ and keep engaged for this purpose an adequate number of laborers.
- E. Surplus Materials: The Contractor shall remove from the site all surplus materials when there is no further use for same.
- F. Tools And Materials: At the conclusion of the work, all erection plant, tools, temporary structures and materials belonging to the Contractor shall be promptly removed.
- G. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.

3.18 CLEANING:

- A. The Contractor shall thoroughly clean all equipment and materials furnished and installed and shall deliver such materials and equipment undamaged in a clean and new appearing condition up to date of Final Acceptance.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- D. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.



- E. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration up to date of Final Acceptance.
- F. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration up to date of Final Acceptance.

3.19 SECURITY AND PROTECTION OF WORK SITE:

- A. Provide protection of installed work, including appropriate protective coverings and maintain conditions that ensure installed Work is without damage or deterioration up to date of Final Acceptance.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.
- C. Secure and protect work and work site against damage, loss, injury, theft and/or vandalism.
- D. Maintain daily sign-in sheets of workers and visitors and make the sheets available to the Commissioner

3.20 MAINTENANCE OF SITE AND ADJOINING PROPERTY:

- A. The Contractor shall take over and maintain the Project site, after order to start work.
- B. The Contractor shall be responsible for the safety of the adjoining property, including sidewalks, paving, fences, sewers, water, gas, electric and other mains, pipes and conduits etc. until the date of Final Acceptance. The Contractor shall, at its own expense, except as otherwise specified, protect same and maintain them in at least as good a condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained and repaired to serviceable condition with materials to match existing.
- D. Provide and keep in good repair all bridging and decking necessary to maintain vehicular and pedestrian traffic.
- E. The Contractor shall also remove all snow and ice as it accumulates on the sidewalks within the Contract Limits Lines.

3.21 MAINTENANCE OF PROJECT SITE:

- A. The Contractor shall take over and maintain all project areas, after order to start work.
- B. Until the date of Final Acceptance, the Contractor shall be responsible for the safety of all project areas, including water, gas, electric and other mains and pipes and conduits and shall at the Contractor's own expense, except as otherwise specified, protect same and maintain them in at least as good condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained, and if damaged, repaired to serviceable conditions with materials to match existing.
- D. The Contractor shall keep the space for the Resident Engineer in a clean condition.

3.22 SAFETY PRECAUTIONS FOR CONTROL CIRCUITS:

- A. Control circuits, the failure of which will cause a hazard to life and property, shall comply with the New York City Dept. of Buildings, Bureau of Electrical Control requirements.

3.23 OBSTRUCTIONS IN DRAINAGE LINES:

- A. The Contractor shall be responsible for all obstructions occurring in all drainage lines, fittings and fixtures after the installations and cleaning of these drainage lines, fittings and fixtures as certified by the Resident Engineer. Roof drains shall be kept clear of any and all debris. Any stoppage shall be repaired immediately at the expense of the Contractor.

END OF SECTION 01 73 00

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and procedural requirements for the management and disposal of construction waste and includes the following requirements:
1. Waste Management Goals
 2. Waste Management Plan
 3. Progress Reports
 4. Progress Meetings
 5. Management Plan Implementation
- B. This Section includes:
1. Definitions
 2. Waste Management Performance Requirements
 3. Reference Resources
 4. Submittals
 5. Quality Assurance
 6. Waste Plan Implementation
 7. Additional Demolition and Salvage Requirements
 8. Disposal

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| D. | Section 01 73 00 | EXECUTION |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONSTRUCTION RECORD DOCUMENTS |
| G. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk or the like.



- D. **Construction and Demolition Waste:** Solid wastes typically including building materials, trash debris and rubble resulting from remodeling, repair and demolition operations. Hazardous materials and land clearing waste are not included.
- E. **Diversion from Landfill:** To remove, or have removed, from the site for recycling, reuse or salvage, material that might otherwise be sent to a landfill.
- F. **Recyclable:** The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product.
- G. **Recycle (recycling):** To sort, separate, process, treat or reconstitute solid waste and other discarded materials for the purpose of redirecting such materials into the manufacture of useful products. Recycling does not include burning, incinerating or thermally destroying waste.
- H. **Return:** To give back reusable items or unused products to vendors.
- I. **Reuse:** To reuse excess or discarded construction material in some manner on the Project site.
- J. **Salvage:** To remove a waste material from the Project site for resale or reuse.
- K. **Waste:** Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable and reusable material.
- L. **Waste Management Plan:** A project-related plan for the collection, transportation and disposal of waste generated at the construction site. The purpose of the plan is to ultimately reduce the amount of material becoming landfill.

1.5 WASTE MANAGEMENT PERFORMANCE REQUIREMENTS:

- A. The City of New York has established that this project shall generate the least amount of waste possible and that processes that ensure the generation of as little waste as possible due to error, inaccurate planning, breakage, mishandling, contamination, or other factors shall be employed.
- B. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.5 C

- C. **LEED CERTIFICATION:** The City of New York will seek LEED (Leadership in Energy and Environmental Design) certification for this Project as indicated in the Addendum to the General Conditions from the U.S. Green Building Council. The documentation required here will be used for this purpose. LEED awards points for a variety of sustainable design measures on a project, one of which is the reuse and recycling of project waste.
- D. **DIVERSION REQUIREMENTS.** A minimum of 75% of total Project demolition waste (by weight) shall be diverted from landfill. The following waste categories are likely candidates to be included in the diversion plan as applicable for this project:
 - 1. Concrete
 - 2. Bricks
 - 3. Concrete masonry units (CMU)
 - 4. Asphalt
 - 5. Metals (e.g. banding, stud trim, ceiling grid, ductwork, piping, rebar, roofing, other trim, steel, iron, galvanized, stainless steel, aluminum, copper, zinc, brass, bronze)

6. Clean dimensional wood
 7. Carpet and pad
 8. Drywall
 9. Ceiling tiles
 10. Cardboard, paper and packaging
 11. Reuse items indicated on the Drawings and/or elsewhere in the Specification
- E. All fluorescent lamps, HID lamps and mercury-containing thermostats removed from the site shall be recycled.
- F. Recycling on the job, subject to the Commissioner's approval, is encouraged on the site itself, such as the crushing and reuse of removed sound concrete and stone. Include these categories in the Waste Management Plan.

1.6 REFERENCES, RESOURCES:

- A. DDC encourages its contractors to seek information from websites and experts in salvage or recycling in order to minimize disposal costs. There are numerous opportunities to sell, salvage, or to donate materials and accrue tax benefits (which would accrue to the contractor); also there are outlets that will pick up, and in some cases buy recyclable materials. Examples of information resources are as follows:
1. DDC's Sustainable Design web site:
http://www.nyc.gov/html/ddc/html/design/sustainable_home.shtml This includes a manual on Construction and Demolition Waste Reduction and Recycling, a Sample Waste Management Plan and sample C&D Waste Management log. A standard Construction and Demolition Waste Management Log form is included at the end of this section.
 2. Web Resources
(Information only; no warranty or endorsement is implied.)
www.wastematch.org Site of New York Waste Match, a materials exchange database and service
www.bignyc.org Site of Build It Green NYC, a non profit outlet for salvaged and surplus building materials
www.usgbc.org Site of the United States Green Building Council, with a description of the LEED certification process and requirements for C&D waste recycling
www.epa.gov/epawaste/index.htm Site of the U.S. Environmental Protection Agency that discusses construction and demolition waste issues, and links to other resources.

1.7 SUBMITTALS:

- A. The Contractor shall be responsible for the development and implementation of a Waste Management Plan for the Project. The Contractor's subcontractors shall assist in the development of that Plan, and collect and deposit their waste and recyclable materials in accordance with the approved Plan.
- B. DRAFT WASTE MANAGEMENT PLAN. Within fifteen (15) days after receipt of 'Notice to Proceed', or prior to any waste removal, whichever occurs sooner, the Contractor shall submit to the Commissioner a Draft Waste Management Plan. Include separate sections for demolition and construction waste. The Plan shall demonstrate how the performance goals will be met, and contain the following:



1. List of materials targeted for reuse, salvage, or recycling, and names, addresses, and phone numbers of receiving facilities/companies that will be purchasing or accepting each material.
 2. Description of onsite and/or offsite sorting methods for all materials to be removed from site.
 3. If mixed construction and demolition waste is to be sorted off-site, provide a letter from the processor stating the average percentage of mixed construction and demolition waste they recycle.
 4. Landfill information: Names of landfills where non-recyclable/reusable/salvageable waste will be disposed, and list of applicable tipping fees.
 5. Materials handling procedures: A description of the means by which any recyclable, salvaged, or reused materials will be protected from contamination, and collected in a manner that will meet the requirements for acceptance by the designated recycling processors.
 6. Transportation: A description of the means of transportation and destination for recycled materials.
 7. Meetings: Description of regular meetings to be held to address waste management.
 8. Sample spreadsheet and description of how the implementation of the plan will be documented on a monthly basis.
- C. **FINAL WASTE MANAGEMENT PLAN.** Within fifteen (15) days of Commissioner's approval of the Draft Plan, the Contractor shall submit a Final Waste Management Plan.
- D. **PROGRESS REPORTS.** The Contractor shall submit monthly a Waste Management Progress Report, containing the following information:
1. Project title, name of company completing report, and dates of period covered by the report
 2. Report on the disposal of all jobsite waste. A DDC C&D Waste Management Log form is available on the DDC Sustainable Design website and included at the end of this section. For each shipment of material removed from the site, provide the following:
 - a. Date and ticket number of removal
 - b. Identity of material hauler
 - c. Material Category
 - d. Total quantity of waste, in tones/cubic yards, by type
 - e. Quantity of waste salvaged, recycled and/or reused, by type
 - f. Total quantity of waste diverted from landfill (recycled, salvaged, reused) as a percentage of total waste
 - g. Recipient of each material type
 3. Provide monthly and cumulative project totals of waste, quantity diverted, and percentage diverted.
 4. Note that the unit of measure may be either tons or cubic yards, but must be consistent for all shipments and all materials throughout the project. Reports with inconsistent or mixed units will not be reviewed and will be returned for re-submission.
 5. Include legible copies of on-site logs, weight tickets and receipts. Receipts shall be from charitable organizations, recycling and/or disposal site operators who can legally accept the materials for the purpose of reuse, recycling or disposal. Contractor shall save such original documents for the life of the project plus seven (7) years.
- E. **LEED Submittal:** For LEED designated projects submit LEED Letter Template for Credit 2.2, signed by the Contractor, tabulating total waste material, quantities diverted and means by which it is diverted, and statement that requirements for the credit have been met.
- F. **Refrigerant Recovery.** Submit Qualification data for Refrigerant recovery technician. Statement of refrigerant recovery, signed by the refrigerant recovery technician responsible for recovering refrigerant

stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.8 QUALITY ASSURANCE:

- A. The Contractor shall designate a Waste Management Coordinator, to ensure compliance with this section. Coordinator shall be present at Project site full time for the duration of the project.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Waste management plans, documentation and implementation shall be discussed at the following meetings:
 - 1. Pre-demolition kick-off meeting
 - 2. Pre-construction kick-off meeting
 - 3. Regular job-site meetings
 - 4. Contractor toolbox meetings

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 WASTE PLAN IMPLEMENTATION:

- A. The Contractor shall implement the Waste Management Plan, coordinate the Plan with all affected trades, and designate one individual as the Construction Waste Management Representative, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. The Contractor shall be responsible for the provision of containers and the removal of all waste, non-returned surplus materials, and rubbish from the site in accordance with the approved Waste Management Plan. The Contractor shall oversee and document the results of the Plan. Monies received for salvaged materials shall remain with the Contractor, except the monies for those items specifically identified elsewhere in the specifications, or indicated on the drawings as belonging to others.
- C. Responsibilities of Subcontractors: Each subcontractor shall be responsible for collecting its waste, non-returned surplus materials, and rubbish, in accordance with the Waste Management Plan.
- D. Distribution. The Contractor shall distribute copies of the Waste Management Plan to each Subcontractor, Resident Engineer, Construction Manager, and Commissioner.
- E. Instruction: The Contractor shall provide on-site instruction of proper waste management procedures to be used by all parties in appropriate stages of the Project.
- F. Procedures. Conduct waste management operations to ensure minimum interference with site vegetation, roads, streets, walks and other adjacent occupied and used facilities.
 - 1. Collect co-mingled waste and/or separate all recyclable waste in accordance with the Plan. Specific areas on the Project site are to be designated, and appropriate containers and bins clearly marked with acceptable and unacceptable materials.
 - 2. Inspect containers and bins for contamination and remove contaminated materials if found.



3. Comply with the General Conditions for controlling dust and dirt, environmental protection, and noise control.

3.2 ADDITIONAL DEMOLITION AND SALVAGE REQUIREMENTS:

- A. Demolition and salvage of additional items indicated in other sections of the Project Specifications require special attention as part of the overall 75 % diversion from landfill. Specific requirements for special attention are designated in other sections of the Project Specifications.

3.3 DISPOSAL:

- A. General. Except for items or material to be salvaged, recycled or otherwise reused, remove waste material from the Project site and legally dispose of them in a manner acceptable to authorities having jurisdiction.
 1. Except as otherwise specified, do not allow waste materials that are to be disposed of to accumulate on site.
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning. Do not burn waste materials
- C. Disposal. Transport waste materials off Project Site and legally dispose of them.

END OF SECTION 01 74 19

No Text



SECTION 01 77 00
CLOSEOUT PROCEDURES

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Closeout Procedures, including without limitation the following:
1. Definitions
 2. Substantial Completion
 3. Final Acceptance
 4. Warranties
 5. Final Cleaning
 6. Repair of the Work
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED- NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

1.3 RELATED SECTIONS: include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| C. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT & DISPOSAL |
| D. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |
| E. | Section 01 79 00 | DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Substantial Completion: shall mean the written determination by the Commissioner that the Work required under the Contract is substantially, but not entirely, complete.
- D. Final Acceptance: shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

1.5 SUBSTANTIAL COMPLETION:

- A. Preliminary Procedures: Before requesting inspection to determine the date of Substantial Completion, the Contractor shall complete and supply all items required by the contract specifications, General Conditions, Addendum to the General Conditions, change orders or other directives from the Commissioner's representatives. The required items will include all contract requirements for substantial completion, including but not limited to items related to releases, regulatory approvals, warranties and guarantees, record documents, testing, demonstration and orientation, final clean up and repairs, and all specific checklist of items by the Resident Engineer. (See Attachment "A" at the end of this section for sample requirements for Substantial Completion).
- B. Prepare and submit a list to the Resident Engineer of incomplete items, the value of incomplete construction, and reasons the work is not complete.
- C. Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Substantial Completion. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer makes a determination that the work is substantially complete and approves the Final Punch List and the date for Final Acceptance, he/she will so advise the Commissioner and recommend issuance of the Certificate of Substantial Completion. If the Resident Engineer determines that the work is not substantially complete, he/she will notify the Contractor of those items that must be completed or corrected before the Certificate of Substantial Completion will be issued.
 - 1 Re-inspection: Contractor shall request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.
 - 2 Results of completed inspection will form the basis of requirements for Final Acceptance.

1.6 FINAL ACCEPTANCE:

- A. Preliminary Procedures: Before requesting final inspection for Final Acceptance of the Work, the Contractor shall complete the following. (Note that the following are to be completed, submitted as appropriate, and approved by the Commissioner, as applicable, prior to the final inspection and are not to be submitted for approval or otherwise at the final inspection unless specifically indicated). List exceptions in the request.
 - 1. Verify that all required submittals have been provided to the Commissioner including but not limited to the following:
 - a. Manufacturer's cleaning instructions
 - b. Posted instructions
 - c. As-built Record Documents (Drawings, specifications, and product data) as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, incorporating any changes required by the Commissioner as a result of the review of the submission prior to the pre-final inspection.
 - d. Operation and Maintenance Manuals, including Preventive Maintenance, Special Tools, Repair Requirements, Parts List, Spare Parts List, and Operating Instructions.



- e. Completion of required Demonstration and Orientation, as applicable, of designated personnel in operation and maintenance of systems, sub-systems and equipment.
 - f. Applicable LEED Building submittals as described in Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.
 - g. Construction progress photographs as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
2. Submit a certified copy of the final approved Punch List of items to be completed or corrected. The certified copy of the Punch List shall state that each item has been completed or otherwise resolved for acceptance, and shall be endorsed and dated by the Contractor.
 3. Submit pest-control final inspection report and survey as required in Section 01 50 00, TEMPORARY FACILITIES AND CONTROLS.
 4. Submit record documents and similar final record information.
 5. Deliver tools, spare parts, extra stock and similar items.
 6. Complete final clean-up requirements including touch-up painting of marred surfaces.
 7. Submit final meter readings for utilities, as applicable, a measured record of stored fuel, and similar data as of the date when the City took possession of and assumed responsibility for corresponding elements of the work.
- B. Final Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Final Acceptance of the Work. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify the Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer finds that all items on the Final Approved Punch List are complete and no further work remains to be done, he/she will so advise the Commissioner and recommend the issuance of the determination of Final Acceptance. If the Resident Engineer determines that the work is not complete, he/she will notify the Contractor of those items that must be completed or corrected before the determination of Final Acceptance will be issued.
- C. Final Acceptance: The Work will be accepted as final and complete as of the date of the Resident Engineer's inspection if, upon such inspection, the Resident Engineer finds that all items on the Punch List are complete and no further Work remains to be done. The Commissioner will then issue a written determination of Final Acceptance.

1.7 WARRANTIES:

- A. The items of materials and/or equipment for which manufacturer warranties are required are listed in Schedule B of the Addendum. For each item of material and/or equipment listed in Schedule B, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth in Schedule B and will be replaced or repaired within such specified period. The contractor shall deliver all required warranties to the Commissioner.
- B. Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.
- C. Submittal Time: Submit written Warranties on request of the Commissioner for designated portions of the Work where commencement of Warranties other than date of Substantial Completion is indicated.
- D. Partial Occupancy: Submit properly executed Warranties to the Commissioner within 15 days of completion of designated portions of the Work that are completed and occupied or used by the City.
- E. Organize the Warranty documents into an orderly sequence based on the Project Specification Divisions and Section Numbers.



1. Bind Warranties in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 2. Identify each binder on the front and spine with the typed or printed title "WARRANTIES;" name and location of Project; Capitol Budget Project Number (FMS ID); and Contractor's and applicable subcontractor's name and address.
 3. Provide heavy paper dividers with plastic-covered tabs for each separate Warranty. Mark tab to identify the product or installation.
 4. Provide a typed description of each product or installation being warranted, including the name of the product, and the name, address, and telephone number of the Installer.
- F. When warranted materials and/or equipment require operation and maintenance manuals, provide additional copies of each required Warranty in each required manual. Refer to Section 01 78 39, CONTRACT RECORD DOCUMENTS, for requirements of Operation and Maintenance Manuals.

PART II – PRODUCTS

2.1 MATERIALS:

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART III – EXECUTION

3.1 FINAL CLEANING:

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations, as applicable, before requesting inspection for Final Acceptance of the Work for entire Project or for a portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.



- j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
 - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - n. Replace parts subject to unusual operating conditions.
 - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
 - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
 - s. Leave Project clean and ready for occupancy.
 - t. Construction Waste Disposal: Comply with waste disposal requirements in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests, as required in Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS. Prepare and submit a Pest Control report to the Commissioner.
- D. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on City's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

3.2 REPAIR OF THE WORK:

- A. Subject to the terms of the Contract the Contractor shall complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Contractor shall repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION 01 77 00

CLOSEOUT PROCEDURES
01 77 00 -6

SECTION 01 77 00

ATTACHMENT 'A'

The following list is a general sample of Substantial Completion requirements, including but not limited to:

1. Prepare and submit a list to the Resident Engineer, of incomplete items, the value of incomplete construction, and reasons the work is not complete.
2. Obtain and submit any necessary releases enabling the City unrestricted use of the project and access to services and utilities.
3. Regulatory Approvals: Submit all required documentation from applicable Governing Authorities, including, but not limited to, Department of Buildings (DoB); Department of Transportation (DoT); Department of Environmental Protection (DEP); Fire Department (FDNY); etc. Documentation to include, but not limited to, the following:
 - a. Building Permits, Applications and Sign-offs.
 - b. Permits and Sign-off for construction fences; sidewalk bridges; scaffolds, cranes and derricks; utilities; etc.
 - c. Certificates of Inspections and Sign-offs.
 - d. Required Certificates and Use Permits.
 - e. Certificate of Occupancy (C.O.), Temporary Certificate of Occupancy (T.C.O.) or Letter of Completion as applicable.
4. Submit specific warranties required by the specifications, final certifications, and similar documents.
5. Prepare and submit Record Documents as described in Section 01 78 39, **CONTRACT RECORD DOCUMENTS**, including but not limited to; approved documentation from Governing Authorities; as-built record drawings and specifications; product data; operation and maintenance manuals; Final Completion construction photographs; damage or settlement surveys; final property surveys; and similar final record information. The Resident Engineer will review the submission and provide appropriate comments. If comments are significant the initial submission will be returned to the Contractor for correction and re-submission incorporating the comments prior to the Final Inspection.
6. Record Waste Management Progress Report: Submit C&D Waste Management logs, with legible copies of weight tickets and receipts required in accordance with Section 01 74 19, **CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL**.
7. If applicable submit LEED Letter Template in accordance with the requirements of Section 01 81 13, **SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS**.
8. Schedule applicable Demonstration and Orientation required in other Sections of the Project Specifications and as described in Section 01 79 00, **DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION**.
9. Deliver tools, spare parts, extra materials, and similar items to location designated by Resident Engineer. Label with manufacturer's name and model number where applicable.
10. Make final changeover of permanent locks and deliver keys to the Resident Engineer. Advise Commissioner of changeover in security provisions.
11. Complete startup testing of systems as applicable.
12. Submit approved test/adjust/balance records.
13. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements as directed by the Resident Engineer.
14. If applicable complete Commissioning requirements as defined in Section 01 91 13, **GENERAL COMMISSIONING REQUIREMENTS**.
15. Complete final cleaning requirements, including touchup painting.
16. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

No Text



SECTION 01 78 39
CONTRACT RECORD DOCUMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Contract Record Documents, including:
1. As-built Contract Record Drawings.
 2. As-built marked-up copies of Record Specifications, addenda and Change Orders.
 3. As-built marked-up Product Data
 4. Record Samples
 5. Construction Record Photographs
 6. Operating and Maintenance Manuals
 7. Final Site Survey
 8. Guarantees and Warranties
 9. Waste Disposal Documentation
 10. LEED Materials and Matrix
 11. Miscellaneous Record Submittals
- B. The Department of Design and Construction, at the start of construction (kick-off meeting), will furnish to the Contractor at no cost a complete set of Contract Drawings Mylars (reproducible) pertaining to the work to be performed under the Contract. It is the responsibility of the Contractor to modify the Contract Drawings to indicate all changes and corrections, if any, occurring in the work as actually installed. The Contractor is required to furnish all other Mylar (reproducible) drawings, if necessary, such as Addenda Drawings and Supplementary Drawings as may be necessary to indicate all work in detail as actually completed. All professional seals must be blocked out. Title box complete with project title and Design Consultants' names will remain.
- C. Maintenance of Documents and Samples: The Contractor shall maintain, during the progress of the work, an accurate record of the work as actually installed, on Contract Record Drawings, on Mylar (reproducible), in ink. Store record documents and samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition. Make documents and samples available at all times for the Resident Engineer's inspections.

The Contractor's attention is particularly directed to the necessity of keeping accurate records of all subsurface and concealed work, so that the Contract Record Drawings contain this information in exact detail and location. Contract Record Drawings shall also show all connections, valves, gates, switches, cut-outs and similar operating equipment.

For projects designated to achieve a LEED rating the Contractor shall receive a copy of the project's LEED scorecard for the purpose of monitoring compliance with the target objectives and to facilitate coordination with the LEED Consultant. The Contractor shall receive periodic updates of this scorecard,



and is required to submit the final version of the Scorecard at Substantial Completion with other project Record Documents.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- C. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. As-Built Contract Record Drawings: Comply with the following:
 1. Progress Submission: As directed by the Resident Engineer, submit progress As-Built Contract Record Drawings at the 50% Construction Completion stage.
 2. Final Submission: Before substantial completion payment, the Contractor shall furnish to the Commissioner one (1) complete set of marked-up Mylar (reproducible) As-Built Contract Record Drawings, in ink indicating all of the work and locations as actually installed, plus one (1) set of paper prints which will be furnished to the sponsoring agency by DDC.
 3. As-Built Contract Record Drawings shall be of the same size as that of the Contract Drawings, with a one (1) inch margin on three (3) sides and a two (2) inch margin on the left side for binding.
 4. Each As-Built Contract Record Drawing shall bear the legend "AS-BUILT CONTRACT RECORD DRAWING" in heavy block lettering, one half (1/2) inch high, and contain the following data:

AS-BUILT CONTRACT RECORD DRAWING

Contractor's Name _____
 Contractor's Address _____
 Subcontractor's Name (where applicable) _____
 Subcontractor's Address _____
 Made by: _____ Date _____
 Checked by: _____ Date _____

Commissioner's Representatives
 (Resident Engineer) DDC
 (Plumbing Inspector) DDC
 (Heating & Ventilating Inspector) DDC
 (Electrical Inspector) DDC



5. Record Drawing Title Sheet: The Contractor shall prepare a title sheet, the same size as the Contract Record Drawings, which shall contain the following:
 - a. Heading:
The City of New York
Department of Design and Construction
Division of Public Buildings
 - b. Capital Budget Project Number (FMS ID)
 - c. Name and Location of Project
 - d. Contractor's Name and Address
 - e. Subcontractor's Name and Address (where applicable)
 - f. Record of changes (a caption description of work affected, and the date and number of Change Order or other authorization)
 - g. List of Record Drawings
- B. Record Specifications, Addenda and Change Order: Submit to the Commissioner two (2) copies each of marked-up Record Specifications, Addenda and Change Orders.
- C. Record Product Data: Submit to the Commissioner two (2) sets of Record Product Data.
- D. Record Construction Photographs: Submit to the Commissioner final as-built construction photographs and negatives of the completed work as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
- E. Operating and Maintenance Manuals:
 1. Submit three (3) copies each of preliminary manuals to the Resident Engineer for review and approval. The Contractor shall make such corrections, changes and/or additions to the manual until deemed satisfactory by the Resident Engineer. Deliver three (3) copies of the final approved manuals to the Resident Engineer for distribution.
 2. Commissioning: Comply with the requirements of Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS, as well as the requirements set forth in sections of the Project Specifications, for projects designated for Commissioning. Submit four (4) copies each of data designated to be included in the Commissioning Operation and Maintenance Manual to the Resident Engineer. The Resident Engineer will forward such data to the Commissioning Authority/Agent (CxA) for review and comment. The Contractor shall make such corrections, changes and/or additions to the data until deemed satisfactory and deliver four (4) copies of the final data to the Resident Engineer for use by the Commissioning Authority/Agent (CxA) to prepare the Commissioning Operation and Maintenance Manual.
 - a. Non-Commissioning Data: All remaining data not designated for Commissioning and required as part of Maintenance and Operation Manual shall be prepared and assembled in accordance with the requirements of this section for Operating and Maintenance Manuals.
- F. Final Site Survey: Submit Final Site Survey as described in Section 01 73 00, EXECUTION, in quantities requested by the Commissioner, signed and sealed by a Land Surveyor licensed in the State of New York.
- G. Guarantees and Warranties.
- H. Waste Disposal Documents and Miscellaneous Record Documents.

PART II – PRODUCTS

2.1 CONTRACT RECORD DRAWINGS:

- A. Record Prints: The Contractor shall maintain one set of blue- or black-line white prints as applicable of the Contract Drawings and Shop Drawings. If applicable, the Record Contract Drawings and Shop Drawings shall incorporate the arrangement of the work based on the accepted Master Coordination Drawing(s) as described in Section 01 33 00, SUBMITTAL PROCEDURES.
1. Preparation: The Contractor shall mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
 2. Change Orders: All changes from Contract Drawings shall be distinctly encircled and identified by Change Order number correlating to changes listed on the "Title Sheet." The Contractor shall show within the encircled areas the work as actually installed.
- B. Content: Types of items requiring marking include, but are not limited to, the following:
1. Dimensional changes to Drawings.
 2. Revisions to details shown on Drawings.
 3. Depths of foundations below first floor.
 4. Locations and depths of underground utilities.
 5. Revisions to routing of piping and conduits.
 6. Revisions to electrical circuitry.
 7. Actual equipment locations.
 8. Duct size and routing.
 9. Locations of concealed internal utilities.
 10. Changes made by Change Order
 11. Changes made following Commissioner's written orders.
 12. Details not on the original Contract Drawings.
 13. Field records for variable and concealed conditions.
 14. Record information on the Work that is shown only schematically.
- C. Progress Record Mylar's (reproducible): As directed by the Resident Engineer at 50% construction completion, review marked-up Record Prints with the Resident Engineer and the Design Consulting. When directed by the Resident Engineer transfer progress mark-ups to a full set of Mylar's (reproducible) and submit one blue line or black line record copy to the Resident Engineer. The marked-up Mylar's (reproducible) shall be retained by the contractor for completion of mark-up and final submission.
- D. Final Contract Record Mylar's (reproducible): Immediately before final inspection for Certificate of Substantial Completion, review marked-up Record Prints with the Resident Engineer and the Design Consulting. When authorized, complete mark-up of a full set of corrected Mylar's (reproducible) of the Contract Drawings.
1. Incorporate changes and additional information previously marked on Record Prints. Erase, redraw, and add details and notations where applicable.
 2. Refer instances of uncertainty to Resident Engineer for resolution.
 3. Print the As-Built Contract Drawings and Shop Drawings for use as Record Transparencies as described in Sub-Section 1.5.



2.2 RECORD SPECIFICATIONS, ADDENDA AND CHANGE ORDERS:

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made
 4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
 5. Note related Change Orders and Record Drawings where applicable.
 6. Upon completion of mark-up, submit two (2) complete copies of the marked-up Record Specifications to the Commissioner.

2.3 RECORD PRODUCT DATA:

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 3. If possible, a Change Order proposal should include resubmitting updated Product Data. This eliminates the need to mark up the previous submittal.
 4. Note related Change Orders and Record Drawings where applicable.
 5. Upon completion of mark-up submit to the Commissioner two (2) sets of the marked-up Record Product Data.
 6. Where Record Product Data is required as part of Maintenance Manuals, submit marked-up Product Data as an insert in the manual instead of submittal as record Product Data.

2.4 RECORD SAMPLE SUBMITTAL:

- A. Prior to the date of Substantial Completion, the Contractor shall meet with the Resident Engineer at the site to determine which of the Samples maintained during the construction period shall be transmitted to the Commissioner for record purposes.
- B. Comply with the Resident Engineer's instructions for packaging, identification marking and delivery to DDC. Dispose of other samples as specified for disposal of surplus and waste material.

2.5 OPERATING AND MAINTENANCE MANUALS:

- A. The Contractor shall provide preliminary and final versions of Operating and Maintenance Manuals required for those systems, equipment and materials listed in other Sections of the Project Specifications.
- B. Format: Prepare and assemble Operation and Maintenance Manuals in heavy-duty, 3-ring, hardback loose leaf binders in the form of an instructional manual. All binders for each discipline shall be the same color. When multiple binders are used, correlate data into related consistent groupings. Binder front shall containing permanently attached labels displaying the following:

1. Heading:
The City of New York
Department of Design and Construction
Division of Public Buildings
 2. Capital Budget Project Number (FMS ID)
 3. Name and Location of Project
 4. Contractor's name and Address
 5. Subcontractor's Name and Address (where applicable)
 6. Dates of the work covered by the contents of the Project Manual.
 7. Binder spine shall display Project Number (FMS ID) and date of completion.
- C. Organization: Include a section in the directory for each of the following:
1. List of documents
 2. List of systems
 3. List of equipment
 4. Table of contents
- D. Arrange content by systems under Specification Section numbers and sequence of Table of Contents of the Project manual. Provide tabbed flyleaf for each separate product, equipment and/or system/subsystem with typed description of product and major component parts of equipment.
- E. Safety warnings or cautions shall be visibly highlighted within each maintenance procedure. Use of such highlights shall be limited to only critical items and shall not be used in an excessive manner which would reduce their effectiveness.
- F. For each product or system, list names, addresses and telephone numbers of Subcontractors and Suppliers, including local source of supplies and replacement parts. Vendors and Supplier listings are to include names, addresses and telephone numbers, including nearest field service telephone numbers.
- G. Where contents of the manual include any manufacturer's catalog pages, clearly indicate the precise items and options included in the installation and delete all manufacturers' data regarding products not included in the installation.
- H. All material within manuals shall be new. Copies used for prior submittals or used in construction shall not be used.
- I. Submit preliminary and final manual editions to the Commissioner according to the approved progress schedule.
- J. Manuals shall present all technical material to the greatest extent possible, with respect to text, tabular matter and illustrations. Illustrations shall preferably consist of line drawings. All applicable drawings shall be included. If available, color photograph prints may be included.
- K. Preliminary manual editions shall be as technically complete as the final manual edition. All illustrations shall be in final forms.
- L. Final manual editions shall be technically accurate and complete and shall represent all "as-built" systems, pieces of equipment, or materials, which have been accepted by the Commissioner. All illustrations, text and tabular material shall be in final form. All shop drawings shall be included as specified in individual Specification Sections.
- M. Building products, applied materials, and finishes: Include product data, with catalog number, size, composition, and color texture designations. Where applicable, provide information for re-ordering custom manufactured products.
- N. Instructions for care and maintenance: Include manufacturers' recommendations for cleaning agents and methods, and recommended schedule for cleaning and maintenance.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

- O. Moisture Protection and Weather Exposed Products: Include product data listing applicable reference standards, chemical compositions, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- P. Additional Requirements: Specified in individual Specification Sections.

2.6 DEMONSTRATION AND ORIENTATION DVD:

- A. Non-Commissioned Projects: The Contractor shall submit final version of applicable Demonstration and Training DVD recordings in compliance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

2.7 GUARANTEES AND WARRANTIES:

- A. SCHEDULE B – Requirements for guarantees and warranties for the Project are set forth in Schedule B, which is included as part of the Addendum.
- B. FORM – For all guarantee requirements set forth in Schedule B, the Contractor shall provide a written guaranty, in the form set forth herein.
- C. Submit fully executed and signed manufacturers' Warranties as listed in the Project Specifications and outlined in Schedule B of the Addendum. Refer to Section 01 77 00, CLOSEOUT PROCEDURES for submittal requirements.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

GUARANTY

DDC PROJECT # _____

PROJECT DESCRIPTION _____

CONTRACT # _____

SPECIFICATION SECTION # AND TITLE _____

GUARANTY TO BE IN EFFECT FROM _____

TO _____

The Contractor hereby guarantees that the work specified under the above section of the aforesaid Contract will be free from defects of material and/or workmanship, for the period indicated above.

The Contractor also guarantees that it will promptly repair, restore, rebuild or replace whichever may be deemed necessary by the City, any or all defective material or workmanship of the aforementioned section, that may appear within the guaranty period and any finished work to which damage may occur because of such defects, to the satisfaction of the City and without any cost or expense to the City.

The Contractor hereby agrees to pay to the City the cost of the repairs or replacements should the City make the same because of the failure of the Contractor to do so.

Contractor: _____

By: _____
Signature of Partner or Corporate Officer

Print Name: _____

Subscribed and sworn to before me this
day of _____, year _____

Notary Public



2.8 WASTE DISPOSAL DOCUMENTATION:

- A. Certify and deliver to the Commissioner all documentation including reports, receipts, certificates, records etc. for the collection, handling, storage, classification, testing, transportation, recycling and/or disposal of all Non-Hazardous Construction Waste as required by Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL, and Hazardous Waste as required by other Project Specification Sections. Certify compliance with all applicable governing laws, codes, rules and regulations.

2.9 MISCELLANEOUS RECORD DOCUMENTS:

- A. Refer to other Project Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities. Prior to Final Acceptance, complete miscellaneous records and place in good order, properly identified and bound or otherwise organized to allow for use and reference.
- B. Submit three (3) copies of each document to the Commissioner or as otherwise directed by the Commissioner.

PART III – EXECUTION

3.1 RECORDING AND MAINTENANCE:

- A. Recording: Maintain one copy of each submittal during the construction period for Contract Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Contract Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to the Contract Record Documents for the Resident Engineer's reference during normal working hours.

END OF SECTION 01 79 39



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

No Text



SECTION 01 79 00
DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 79 00

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements, when set forth in sections of the Project Specifications, for instructing facility's personnel, including the following:
1. Demonstration of operation of systems, subsystems, and equipment.
 2. Owner's Pre-Acceptance Orientation in operation and maintenance of systems, subsystems, and equipment.
 3. Demonstration and Orientation videotapes. (Non-Commissioned Projects)
- B. The Contractor shall provide the services of equipment manufacturers orientation specialists experienced in the type of equipment to be demonstrated.
- C. Separate Orientation sessions shall be conducted for mechanical operations and maintenance personnel and for electronic and electrical maintenance personnel.
- D. Commissioning: Refer to the Addendum to identify whether this project is to be Commissioned. For Commissioned projects the Contractor shall provide Demonstration and Orientation as described in this section and cooperate with the Commissioning Authority/Agent (CxA) to implement Commissioning requirements as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 77 00 CLOSEOUT PROCEDURES
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS
- F. Specific requirements for demonstration and training indicated in other sections of the Project Specifications

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. Instruction Program: Submit three (3) copies of outline of instructional program for demonstration and orientation, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each orientation module to the Commissioner for approval no less than thirty (30) days prior to the date the proposed orientation is to take place. Include learning objectives and outline for each orientation module.
1. At completion of training, submit three (3) complete training manual(s) and three (3) applicable DVD recording(s) to the Commissioner for the facility's and City's use.
- B. Qualification Data: For facilitator, instructor and Videographer.
- C. Attendance Record: For each orientation module, submit list of participants and length of instruction time.
- D. Evaluations: For each participant and for each orientation module, submit results and documentation of performance-based test.
- E. Submit all final orientation material to the Resident Engineer a minimum of fourteen (14) days prior to the scheduled training.
- F. Demonstration and Orientation Recordings:
1. Non-Commissioned Projects:
 - a. The Contractor shall submit to the Commissioner three (3) copies of Demonstration and Orientation DVD (Digital Video Disk) recordings within seven (7) days of end of each training module.
 - b. Identification: On each copy, provide an applied label with the following information:
 - 1) Project Contract I.D. Number
 - 2) Project Contract Name
 - 3) Name of Contractor
 - 4) Name of Subcontractor as applicable
 - 5) Name of Design Consultant
 - 6) Name of Construction Manager as applicable
 - 7) Date recorded.
 - 8) Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 - 9) Table of Contents including list of systems covered.
 - c. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding DVD recording. Include name of Project and date of recording on each page.
 2. Commissioned Projects:
 - a. Demonstration and Orientation DVD recordings for Commissioned projects will be recorded by the Commissioning Authority/Agent (CxA) under separate contract with the City of New

York. The Contractor performing Demonstration and Orientation shall cooperate with the CxA in the recording of each Demonstration and Orientation module.

1.6 QUALITY ASSURANCE:

- A. Facilitator Qualifications: A firm or individual experienced in orientation or educating maintenance personnel in an orientation program similar in content and extent to that indicated for this Project.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 01 40 00, QUALITY REQUIREMENTS, experienced in operation and maintenance procedures and orientation.
- C. Videographer Qualifications: A professional Videographer who has experience with orientation and construction projects.
- D. Pre-instruction Conference: Schedule with the Resident Engineer a conference at Project site to comply with requirements in Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION. Review methods and procedures related to demonstration and orientation including, but not limited to, the following:
 - 1. Inspect and discuss locations and other facilities required for instruction.
 - 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
 - 3. Review required content of instruction.
 - 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.7 COORDINATION:

- A. Coordinate instruction schedule with the Resident Engineer and facility's operations. Adjust schedule as required to minimize disrupting facility's operations.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
- C. Coordinate content of orientation modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the Commissioner.

PART II – PRODUCTS

2.1 INSTRUCTION PROGRAM:

- A. Program Structure: Develop an instruction program that includes individual orientation modules for each system and equipment not part of a system, as specified and required by individual Specification Sections.
- B. Orientation Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following:
 - 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.



- d. Regulatory requirements.
 - e. Equipment function including auxiliary equipment and systems.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - h. Performance curves.
2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.
 - c. Maintenance manuals.
 - d. Project Record Documents.
 - e. Identification systems.
 - f. Warranties
 3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
 4. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.
 - i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
 5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
 6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
 7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning



- e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
 - h. Housekeeping practices
8. Repairs: Include the following:
- a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.

PART III – EXECUTION

3.1 INSTRUCTION:

- A. **Facilitator:** Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and the Resident Engineer for the number of participants, instruction times, and location.
- B. The Contractor shall engage qualified instructors to instruct facility's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
- C. **Scheduling:** Schedule instruction with the Resident Engineer at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 - 1. Schedule orientation with the Resident Engineer with at least fourteen (14) days' advance notice.
- D. **Evaluation:** At conclusion of each orientation module, assess and document each participant's mastery of module(s) by use of an oral a written or a demonstration performance-based test.
- E. **Cleanup:** Collect and remove used and leftover educational materials from project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial orientation use.

3.2 DEMONSTRATION AND ORIENTATION RECORDINGS:

- A. **Non-Commissioned projects:**
 - 1. The Contractor shall engage a qualified commercial Videographer to record demonstration and orientation sessions. Record each orientation module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.
 - 2. At beginning of each orientation module, record each chart containing learning objective and lesson outline.
 - 3. All recordings must be close captioned.
 - 4. **Recording Format:** Provide high-quality DVD (Digital Video Disk) format.
 - 5. **Recording:** Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and orientation. Display continuous running time.
 - 6. **Narration:** Describe scenes on the recording by audio narration by microphone while recording or by dubbing audio narration off-site after. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013
Revised - January 15, 2015

7. Transcript: Provide a typewritten transcript of the narration. Display images and running time captured from opposite the corresponding narration segment.

B. Commissioned Projects:

Refer to the Addendum to determine if the project is to be Commissioned.

1. The Commissioning Authority/Agent (CxA) under separate contract with the City of New York will assess and comment on the adequacy of the Orientation Instruction sessions by reviewing the Orientation and Instruction program and agenda provided by each contractor. The provider of the Orientation program will videotape the sessions and provide a copy to the CxA for final review and comments. If necessary, Contractor shall edit the DVD recording per CxA comments.

END OF SECTION 01 79 00

SECTION 01 81 13
SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

A. LEED BUILDING - GENERAL REQUIREMENTS:

The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED™ Green Building rating. Specific project requirements related to this goal are listed in the applicable paragraphs of this section of the General Conditions. The Contractor shall ensure that these requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated LEED BUILDING criteria.

B. This Section includes:

1. Definitions
2. LEED Provisions
3. LEED Building Submittals
4. LEED Building Submittal Requirements
5. LEED Action Plan

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|---------------------|--|
| A. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL |
| B. | Section 01 81 13.13 | VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES,
SEALANTS, PAINTS AND COATINGS |
| C. | Section 01 81 19 | INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS |
| D. | Section 01 91 13 | GENERAL COMMISSIONING REQUIREMENTS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Agrifiber Products: Products derived from recovered agricultural waste fiber from sources such as cereal straw, sugarcane bagasse, sunflower husk, walnut shells, coconut husks, and agricultural prunings, processed and mixed with resins to produce panels with characteristics similar to composite wood.



- C. **Composite Wood:** Products composed of wood or plant particles or fibers bonded by a synthetic resin or binder to produce panels such as plywood, particleboard, and medium density fiberboard (MDF). Does not include hardboard, structural panels, glued laminated timber, prefabricated wood I-joists, or finger-jointed lumber.
- D. **Design Consultant:** “Design Consultant” shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- E. **Forest Stewardship Council (FSC) Certified Wood:** Wood-based materials and products certified in accordance with the Forest Stewardship Council's principles and criteria.
- F. **LEED:** The Leadership in Energy & Environmental Design rating system developed by the United States Green Building Council.
- G. **Rapidly Renewable Materials:** Materials made from agricultural products that are typically harvested within a ten-year or shorter cycle. Rapidly renewable materials include products made from bamboo, cotton, flax, jute, straw, sunflower seed hulls, vegetable oils, or wool.
- H. **Regionally Manufactured Materials:** Materials that are manufactured within a radius of 500 miles from the Project location. Manufacturing refers to the final assembly of components into the building product that is installed at the Project site.
- I. **Regionally Extracted, Harvested, or Recovered Materials:** Materials which are extracted, harvested, or recovered and manufactured within a radius of 500 miles from the Project site.
- J. **Recycled Content:** The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer), or after consumer use (post-consumer).
 - 1. Spills and scraps from the original manufacturing process that are combined with other constituents after a minimal amount of reprocessing for use in further production of the same product are not recycled materials.
 - 2. Discarded materials from one manufacturing process that are used as constituents in another manufacturing process are pre-consumer recycled materials.
 - 3. “Pre-consumer” may also be referred to as “post-industrial”.
- K. **Solar Reflectance Index (SRI):** A measure of a material's ability to reflect solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is equal to 0, and a standard white (reflectance 0.80, emittance of 0.90) is equal to 100.
- L. **Volatile Organic Compound (VOC):** Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.

1.5 LEED PROVISIONS:

- A. Refer to the Addendum for the LEED rating to be achieved for this project. The provisions to achieve this LEED rating are integrated within the project construction documents and specifications. The Contractor is specifically directed to the "LEED BUILDING Performance Criteria" and "LEED BUILDING Submittals" sections within the contract specification. Additional LEED requirements are met through aspects of the project design, including material and equipment selections, which may not be specifically identified as LEED BUILDING requirements. Compliance with the requirements needed to obtain LEED prerequisites and credits will be used as one criterion to evaluate substitution requests.

1.6 LEED BUILDING SUBMITTALS:

- A. Scope: LEED BUILDING submittals are required for all installed materials included in General Construction work. LEED BUILDING Submittals are only required for field-applied adhesives, sealants, paints and coatings included in Plumbing, Mechanical and Electrical work. Submit all required LEED BUILDING submittals in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Applicability: The extent of the LEED BUILDING Submittals varies depending on the specification section. Applicable LEED BUILDING Submittals are listed under the "LEED BUILDING Submittals" heading in each specification section. The detailed requirements for the LEED BUILDING Submittals are defined in Item C below.
- C. Detailed Requirements: Sub-Sections 1.6 C.1 through 1.6 C.3 below defines the information and documents to be provided for each type of LEED BUILDING Submittal as identified in the LEED Submittal Requirements of each specification section:
1. ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM (EBMCF)[GHI]: Information to be supplied for this form (blank sample copy attached at end of this Section to be modified as appropriate to the project) shall include some or all of the following items, as identified in the LEED Submittal Requirements of each specification section:
 - a. Cost breakdowns for the materials included in the contractor or sub-contractor's scope of work. Cost reporting shall include itemized material costs (excluding the contractor's labor, equipment, overhead and profit).
 - b. The percentages (by weight) of post-consumer and/or post-industrial recycled content in the supplied product(s).
 1. For each product with recycled content, also indicate the total recycled content value ($1/2 \times \text{pre-consumer percentage} \times \text{product value} + 1 \times \text{post-consumer percentage} \times \text{product value} = \text{total recycled content value}$).
 2. See additional requirements for concrete below.
 - c. Identification (Yes/No) of materials manufactured within 500 miles of the project site AND containing raw materials harvested or extracted within 500 miles of the project site.
 - 1) Indicate the percentage by weight, relative to the total weight of the product that meets these criteria.
 - 2) Indicate the point of harvest/extraction/recovery of regional raw materials, the point of final assembly of regional manufactured products, and the distance from each point to the project site.
 - d. Volatile Organic Compound (VOC) content of all field-applied adhesives, sealants, paints, and coatings, listed in grams/liter or lbs./gallon, less water.
 - 1) For detailed requirements refer to Section 01 81 13.13 VOC LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
 - e. The amount of "Forest Stewardship Council (FSC) Certified" wood products if used in the Project.
 - 1) Record only new FSC-certified wood products. Do not record reclaimed, salvaged, or recycled FSC-certified wood products.



- 2) Reclaimed, salvaged, or recycled FSC-certified wood may be recorded as post-consumer recycled content.
 - f. The amount of Rapidly Renewable materials if used in the Project.
 - 1) Indicate the type of rapidly renewable material used, and the percentage by weight, relative to the total weight of the product, that consists of rapidly renewable material.
 - g. The percentage (by weight), relative to the total weight of cementitious materials, of supplementary cementitious materials or pozzolans such as fly ash used in each concrete mix used in the Project.
 - 1) For each concrete mix, provide a complete breakdown of all components, by weight and by cost.
 - h. Identification (Yes/No) of composite wood or agrifiber products used in the project that are free of added urea-added formaldehyde resins.
 - i. Identification (Yes/No) of flooring products used in the project that have Carpet and Rug Institute (CRI) Green Label or Green Label Plus certification, or Resilient Floor Covering Institute FloorScore certification.
 - 1) Untreated solid wood flooring, and mineral-based flooring products such as tile, masonry, terrazzo, and cut stone that have no organic-based coatings or sealants, are excluded from this requirement.
 - j. The EBMCF shall record the above information only for those materials or products permanently installed in the project. The EBMCF shall record VOC content, composite and agrifiber products, and CRI or FloorScore ratings only for those materials or products permanently installed within the weather barrier of the LEED building.
2. **EBMCF BACK-UP DOCUMENTATION:** These documents are used to validate the information provided on the EBMCF (except cost data). For each material listed on the EBMCF, provide documentation to certify the material's LEED BUILDING attributes, as applicable:
- a. **RECYCLED CONTENT:** Provide published product literature or letter of certification on the manufacturer's letterhead certifying the amounts of post-consumer and/or post-industrial content.
 - b. **REGIONAL MANUFACTURING AND REGIONAL RAW MATERIALS (WITHIN 500 MILES):** Provide published product literature or letter of certification on the manufacturer's letterhead indicating the city/state where the manufacturing plant is located, where each of the raw materials in the product were extracted, harvested or recovered and the distance in miles from the project site.
 - 1) If only some of the raw materials for a particular product or assembly originate within 500 miles of the project site, provide the percentage (by weight) that these materials comprise in the complete product.
 - c. **VOC CONTENT:** Provide Material Safety Data Sheets (MSDS) certifying the Volatile Organic Compound (VOC) content of the adhesive, sealant, paint, or coating products. VOC content is to be reported in grams/liter or lbs./gallon, less water. If the MSDS does not show the product's VOC content, this information must be provided through other published product literature from the manufacturer, or stated in a letter of certification from the product manufacturer on the manufacturer's letterhead.
 - d. **RAPIDLY RENEWABLE MATERIALS:** If used in the project, provide published literature or letter of certification on the manufacturer's letterhead certifying the percentage of each product that is rapidly renewable (by weight).
3. **PRODUCT CUT SHEETS:** Provide product cut sheets with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project.
4. **CRI GREEN LABEL PLUS CERTIFICATION:** For carpets and carpet cushions, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the "Green Label Plus" IAQ testing program of the Carpet and Rug Institute of Dalton, GA.



5. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER RESINS:** For all composite wood, engineered wood and agrifiber products (including plywood, particleboard, and medium density fiberboard), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products do not contain added urea-formaldehyde resins.
6. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER LAMINATING ADHESIVES:** For all laminating adhesives used with composite wood, engineered wood and agrifiber products (e.g., adhesives used to laminate wood veneers to an engineered wood substrate), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the adhesive products do not contain urea-formaldehyde.
7. **FSC-CERTIFIED WOOD:**
 - a. If used in the project, provide chain of custody documents and copies of invoices regarding wood products, including whether or not such wood product is FSC-certified.
 - b. If used in the project, for assemblies, provide the percentage (by cost and by weight) of the assembly that is FSC-certified wood.
 - c. If used in the project, for assemblies, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the percentage that is FSC-certified wood.
8. **GREEN SEAL COMPLIANCE:** Provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the following product types comply with the VOC limits and chemical component restrictions developed by the Green Seal organization of Washington, DC:
 - a. Interior Architectural Paints and Coatings: refer to Green Seal standard GS-11 (1st edition, May 1993)
 - b. Anti-corrosive and Anti-rust paints: refer to Green Seal standard GC-03 (2nd Edition, January 1997)
 - c. Aerosol Adhesives: refer to Green Seal standard GS-36 (1st edition, October 2000)
9. **HIGH ALBEDO PAVING AND WALKWAY MATERIALS:** For paving and walkway materials made from concrete or brick provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying a minimum Solar Reflectance Index (SRI) value of 29. SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.
10. **HIGH ALBEDO ROOFING MATERIALS:** For exposed roofing membranes, pavers, and ballast products, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following minimum Solar Reflectance Index (SRI) values:
 - a. 78 for low-sloped roofing applications (slope \leq 2:12)
 - b. 29 for steep-sloped roofing applications (slope $>$ 2:12)

SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.

Vegetated roof surfaces are exempt from the SRI criteria.
11. **LOW MERCURY LAMPS:** For all fluorescent, compact fluorescent, and HID lamps installed in the project, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying:
 - a. The mercury content or content range per lamp in milligrams or picograms;
 - b. The design light output per lamp (light at 40% of a lamp's useful life) in lumens; and
 - c. The rated average life of the lamp in hours.



- In addition, provide the total number of each lamp type installed in the project.
12. **FLOORSCORE CERTIFICATION:** For all hard surface flooring, including vinyl, linoleum, laminate flooring, wood flooring, ceramic flooring, rubber flooring, and wall base, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the current FloorScore standard requirements.
 13. **CONCRETE:** Provide concrete mix design for each mix, designated by a distinct identifying code or number and signed by a Professional Engineer licensed in the state in which the concrete manufacturer or supplier is located.
 14. **INTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed within the building's weather barrier, provide manufacturer's cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Dimming capability, in range of percentages.
 15. **EXTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed on site, provide manufacturer's cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Range of field adjustability, if any.
 - e. Warranty of suitability for exterior use.
 16. **ALTERNATIVE TRANSPORTATION:** Provide manufacturer's cut sheets and/or shop drawings for the following items installed on site:
 - a. Bike racks, including total number of bicycle slots provided.
 - b. Signage indicating parking spaces reserved for electric or low-emitting vehicles and for carpools/vanpools, including total number of signs.
 17. **WATER CONSERVING FIXTURES:** For all water consuming plumbing fixtures and fittings, provide manufacturer's cut sheets showing maximum flow rates and/or flush rates.
 18. **ENERGY SAVING APPLIANCES:** Provide manufacturer's cut sheets and published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the product's rating under the U.S. EPA/DOE Energy Star program, for all of the following:
 - a. Appliances (i.e., refrigerators, dishwashers, microwave ovens, televisions, clothes washers, clothes dryers, chilled water dispensers).
 - b. Office equipment (i.e., copy machines, fax machines, plotters/printers, scanners, binding and publishing equipment).
 - c. Electronics (i.e., servers, desktop computers, computer monitor displays, laptop computers, network equipment).
 - d. Commercial food service equipment
 19. **GLAZING:** For glazing in any windows, doors, storefront and window wall systems, curtainwall systems, skylights, and partitions, provide manufacturer's cut sheets indicating the following:
 - a. Glazed area.
 - b. Visible light transmittance.
 - c. Solar heat gain coefficient.
 - d. Fenestration assembly u-factor.



20. VENTILATION: Provide manufacturer's cut sheets for the following:
 - a. Carbon dioxide monitoring systems, if any, installed to measure outside air delivery.
 - b. Air filters: for detailed requirements refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS.
21. REFRIGERATION: For all refrigeration equipment, provide manufacturer's cut sheets indicating the following:
 - a. Equipment type.
 - b. Equipment life. Default values specified by the 2007 ASHRAE Applications Handbook will be used unless otherwise demonstrated by the manufacturer's guarantee and an equivalent long-term service contract.
 - c. Refrigerant type.
 - d. Refrigerant charge in pounds of refrigerant per ton of gross cooling capacity.
 - e. Tested refrigerant leakage rate, in percent per year. A default rate of 2% will be used unless otherwise demonstrated by test data.
 - f. Tested end-of-life refrigerant loss, in percent. A default rate of 10% will be used unless otherwise demonstrated by test data.

1.7 LEED BUILDING SUBMITTAL REQUIREMENTS:

- A. The LEED BUILDING Submittal information shall be assembled into one package per contract specification section(s) (or per subcontractor), and submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Incomplete or inaccurate LEED BUILDING submittals may be used as the basis for the rejection of products or assemblies. Incomplete or inaccurate LEED BUILDING Submittals may be used as the basis for rejecting the submitted products or assemblies.

1.8 LEED ACTION PLANS:

- A. Construction Waste Management Plan- Refer to Section 01 74 19, Construction Waste Management and Disposal for detailed submittal requirements.
- B. Construction IAQ Management Plan- Refer to Section 01 81 19, Indoor Air Quality Requirements for LEED Buildings, for detailed submittal requirements.
- C. Erosion and Sedimentation Control Plan:
 1. The Plan shall be in accordance with the New York State Department of Environmental Conservation (NYSDEC) or the 2003 EPA Construction General Permit, whichever is more stringent.
 2. The Plan shall be submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
 3. Detailed requirements: ESC Plan
 - a. Include the Stormwater Pollution Prevention Plan, if required.
 - b. Identify the party responsible for Plan monitoring and documentation. The party must be regularly on site.
 - c. Describe all site work that will be implemented on the project.
 - d. Provide site plan with location of ESC measures, including, but not limited to, stormwater quantity controls, stormwater quality controls, stabilized construction entrances, washdown areas, and inlet/catch basin protection.
 - e. Describe the inspection and maintenance of the ESC measures. Provide a construction schedule indicating weekly site review.
 - f. Describe reporting and documentation measures.
 4. Detailed requirements: ESC Measures



5. Submittal requirements: ESC Tracking Log
 - a. Note date of major rain events, describe damage, describe any repairs or maintenance performed, and note responsible party.
 - b. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party.
 - c. Submit monthly.
6. Implementation
 - a. The Contractor shall implement the ESC Plan, coordinate the Plan with all affected trades, and designate one individual as the Erosion and Sedimentation Control Representative, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.
 - b. The Contractor shall be responsible for the provision, maintenance, and repair of all ESC measures.
 - c. Demonstration. The Contractor shall provide on-site instruction of proper construction practices required to prevent erosion and sedimentation.
 - d. Meetings. Urgent or ongoing ESC issues shall be discussed at weekly on-site job meetings.

1.9 QUALITY ASSURANCE:

- A. The Contractor shall implement all LEED Action Plans, coordinate the Plans and LEED Building Submittals with all affected trades, and designate one individual as the Sustainable Construction Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of LEED activities with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. Responsibilities of Contractor's Subcontractors: The Contractor shall be responsible for his/her subcontractors complying with the LEED Action Plans and for providing required LEED documentation as required for the project.
- C. Distribution and Compilation: The Contractor shall be responsible for distributing the EBMCF and any other forms or templates required for the subcontractors to record LEED documentation. The Contractor shall also be responsible for collecting and compiling EBMCF information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. Meetings: Sustainable design and construction issues shall be discussed at the following meetings:
 1. Demolition kick-off meeting
 2. Construction kick-off meeting
 3. Construction kick-off meeting for LEED (independent meeting)
 4. Weekly job-site progress and coordination meetings
 5. Closeout meeting

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13

NO TEXT

SECTION 01 81 13.13

VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes requirements for volatile organic compound (VOC) content in adhesives, sealants, paints and coatings used for the project.
- B. All sections in the Project Specifications with adhesives, sealant or sealant primer applications, paints and coatings shall follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications regarding adhesives, sealant or sealant applications, paints and coatings, the requirements set forth in this Section shall prevail.
- C. This Section includes:
1. General Requirements
 2. References
 3. VOC Requirements for Interior Adhesives
 4. VOC Requirements for Interior Sealants
 5. VOC requirements for Interior Paints
 6. VOC requirements for Interior Coatings
 7. Submittals

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| D. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| E. | Section 01 73 00 | EXECUTION |
| F. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| G. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |
| H. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |
| I. | Section 01 81 19 | INDOOR AIR QUALITY FOR LEED BUILDINGS |

1.4 DEFINITIONS:

- A. **ADHESIVE:** Any substance used to bond one surface to another by attachment. Includes adhesive primers and adhesive bonding primers.
1. **Aerosol Adhesive:** Any adhesive packaged as an aerosol with a spray mechanism permanently housed in a non-refillable can designed for hand-held application without the need for ancillary equipment.
- B. **CARCINOGEN:** A chemical listed as a known, probable, reasonably anticipated, or possible human



carcinogen by the International Agency for Research on Cancer (IARC) (Groups 1, 2A, and 2B), the National Toxicology Program (NTP) (Groups 1 and 2), the U.S. Environmental Protection Agency (EPA) Integrated Risk Information System (IRIS) (weight-of-evidence classifications A, B1, B2, and C, carcinogenic, likely to be carcinogenic, and suggestive evidence of carcinogenicity or carcinogen potential), or the Occupational Safety and Health Administration (OSHA).

- C. **CLEAR WOOD FINISH:** Clear/semi-transparent coating applied to wood substrates to provide a transparent or translucent solid film.
 - 1. **Lacquer:** Clear/semi-transparent coating formulated with cellulosic or synthetic resins to dry by evaporation without chemical reaction and provide a solid, protective film.
 - 2. **Sanding Sealer:** A sanding sealer that also meets the definition of a lacquer.
 - 3. **Varnish:** Clear/semi-transparent coating, excluding lacquers and shellacs, formulated to dry by chemical reaction on exposure to air. May contain small amounts of pigment.
- D. **COATING:** Liquid, liquefiable, or mastic composition that is converted to a solid adherent film after application to a substrate as a thin layer; and is used for decorating, protecting, identifying or to serve some functional purpose such as the filling or concealing of surface irregularities or the modification of light and heat radiation characteristics; and is intended for on-site application to interior or exterior surfaces of buildings. Does not include stains, clear finishes, recycled latex paint, specialty (industrial, marine or automotive) coatings or paint sold in aerosol cans.
- E. **FLOOR COATING:** Opaque coating applied to flooring. Excludes industrial maintenance coatings.
- F. **HAZARDOUS AIR POLLUTANT:** Any compound listed by the U.S. EPA in the Clean Air Act Section 112(b)(1) as a hazardous air pollutant.
- G. **MUTAGEN:** A chemical that meets the criteria for category 1, chemicals known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans, under the Harmonized System for the Classification of Chemicals Which Cause Mutations in Germ Cells (United Nations Economic Commission for Europe, Globally Harmonized System of Classification and Labeling of Chemicals).
- H. **OZONE-DEPLETING COMPOUNDS:** A compound with an ozone-depletion potential greater than 0.1 (CFC 11=1) according to the U.S. EPA list of Class I and Class II Ozone-Depleting Substances.
- I. **PAINT:** A pigmented coating. For the purposes of this specification, paint primers are considered to be paints.
 - 1. **Flat Coating or Paint:** Has a gloss of less than 15 (using an 85-degree meter) or less than 5 (using a 60-degree meter).
 - 2. **Non-Flat Coating or Paint:** Has a gloss of greater than or equal to 15 (using an 85-degree meter) or greater than or equal to 5 (using a 60-degree meter).
 - 3. **Non-Flat High-Gloss Coating or Paint:** Has a gloss of greater than or equal to 70 (using a 60-degree meter).
 - 4. **Anti-Corrosive / Rust Preventative Paint:** Coating formulated and recommended for use in preventing the corrosion of ferrous metal substrates.
- J. **PRIMER:** Coating that is formulated and recommended for one or more of the following purposes: to provide a firm bond between the substrate and a subsequent coating; to prevent a subsequent coating from being absorbed into the substrate; to prevent harm to a subsequent coating from materials in the substrate; or to provide a smooth surface for application of a subsequent coating.
- K. **REPRODUCTIVE TOXIN:** A chemical listed as a reproductive toxin (including developmental, female, and male toxins) by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (California Code of Regulations, Title 22, Division 2, Subdivision 1, Chapter 3, Sections 1200, et. Seq.).
- L. **SANDING SEALER:** Clear/semi-transparent coating formulated to seal bare wood. Can be abraded to create a smooth surface for subsequent coatings. Does not include sanding sealers that are lacquers (see Clear Wood Finish above).
- M. **SEALANT:** Any material with adhesive properties, formulated primarily to fill, seal, or waterproof gaps or joints

between surfaces. Includes sealant primers and caulks.

- N. SHELLAC: Clear or pigmented coating formulated solely with the resinous secretions of the lac beetle, thinned with alcohol and formulated to dry by evaporation without chemical reaction. Excludes floor applications.
- O. STAIN: Clear semi-transparent/opaque coating formulated to change the color but not conceal the grain pattern or texture of the substrate.
- P. VOLATILE AROMATIC COMPOUND: Any hydrocarbon compound containing one or more 6-carbone benzene rings, and having an initial boiling point less than or equal to 280 degrees Celsius measured at standard conditions of temperature and pressure.
- Q. VOLATILE ORGANIC COMPOUND: Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.
- R. WATERPROOFING SEALER: A coating that prevents the penetration of water into porous substrates.

1.5 GENERAL REQUIREMENTS:

- A. The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED Green building rating. Specific project requirements related to this goal which may impact this area of work are listed in the applicable paragraphs of this specification section. The Contractor shall ensure that the requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated environmental goals.

1.6 REFERENCES:

- A. Rule 1168 – “Adhesive and Sealant Applications”, amended 7 January 2005): South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- B. Rule 1113 - “Architectural Coatings”, amended 9 July 2004: South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- C. Green Seal Standard GS-11- “Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org
- D. Green Seal Standard GC-03- “Anti-Corrosive Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org

1.6 VOC REQUIREMENTS FOR INTERIOR ADHESIVES, SEALANTS, PAINTS AND COATINGS:

- A. GENERAL: Unless otherwise specified herein, the VOC content of all interior adhesives, sealants, paints and coatings (herein referred to as “products”) shall not be in excess of **250 grams per liter**.
- B. No product shall contain any ingredients that are carcinogens, mutagens, reproductive toxins, persistent bioaccumulative compounds, hazardous air pollutants, or ozone-depleting compounds. An exception shall be made for titanium dioxide and, for products that are pre-tinted by the manufacturer, carbon black, which shall be less than or equal to 1% by weight of the product.
- C. No product shall contain the following:
 - 1. methylene chloride
 - 2. 1,1,1-trichloroethane
 - 3. benzene



4. toluene
5. ethylbenzene
6. vinyl chloride
7. naphthalene
8. 1,2-dichlorobenzene
9. di (2-ethylhexyl) phthalate
10. butyl benzyl phthalate
11. di-n-butyl phthalate
12. di-n-octyl phthalate
13. diethyl phthalate
14. dimethyl phthalate
15. isophorone
16. antimony
17. cadmium
18. hexavalent chromium
19. lead
20. mercury
21. formaldehyde
22. methyl ethyl ketone
23. methyl isobutyl ketone
24. acrolein
25. acrylonitrile

D. No product shall contain more than 1.0% by weight of sum total of volatile aromatic compounds.

1.8 VOC REQUIREMENTS FOR INTERIOR ADHESIVES:

- A. The volatile organic compound (VOC) content of adhesives, adhesive bonding primers, or adhesive primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
- C. For specified building construction related applications, the allowable VOC content is as follows:

1. Architectural Applications:
 - a. Indoor carpet adhesive 50
 - b. Carpet pad adhesive 50
 - c. Wood flooring adhesive 100
 - d. Rubber floor adhesive 60
 - e. Subfloor adhesive 50
 - f. Ceramic tile adhesive 65
 - g. VCT and asphalt tile adhesive 50
 - h. Drywall and panel adhesive 50
 - i. Cove base adhesive 50
 - j. Multipurpose construction adhesive 70
 - k. Structural glazing adhesive 100
2. Specialty Applications:
 - a. PVC welding 510
 - b. CPVC welding 490
 - c. ABS welding 325
 - d. Plastic cement welding 250



e.	Adhesive primer for plastic	550
f.	Contact Adhesive	80
g.	Special Purpose Contact Adhesive	250
h.	Structural Wood Member Adhesive	140
i.	Sheet Applied Rubber Lining Operations	850
j.	Top and Trim Adhesive	250
3. Substrate Specific Applications:		
a.	Metal to metal	30
b.	Plastic foams	50
c.	Porous material (except wood)	50
d.	Wood	30
e.	Fiberglass	80
4. Aerosol Adhesives:		
a.	General purpose mist spray	65% VOC's by weight
b.	General purpose web spray	55% VOC's by weight
c.	Special purpose aerosol adhesives (all types)	70% VOC's by weight

1.9 VOC REQUIREMENTS FOR INTERIOR SEALANTS:

A. The volatile organic compound (VOC) content of sealants, or sealant primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.

B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.

1. Sealants:		
a.	Architectural	250
b.	Non-membrane roof	300
c.	Roadway	250
d.	Single-ply roof membrane	450
e.	Other	420
2. Sealant Primer:		
a.	Architectural – Nonporous	250
b.	Architectural – Porous	775
c.	Other	750

1.10 VOC REQUIREMENTS FOR INTERIOR PAINTS:

A. Paints and Primers: Paints and primers used in non-specialized interior applications (i.e., for wallboard, plaster, wood, metal doors and frames, etc.) shall meet the VOC limitations of the Green Seal Paint Standard GS-11, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:

- 5. Volatile Organic Compounds:
 - a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Interior Paints and Primers:

Non-flat: 150 g/l

Flat: 50 g/l

The calculation of VOC shall exclude water and tinting color added at the point of sale.

- B. Anti-Corrosive and Anti-Rust Paints: Anti-corrosive and anti-rust paints applied to interior ferrous metal substrates shall meet the VOC limitations of the Green Seal Paint Standard GC-03, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:

1. Volatile Organic Compounds:

- a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Anti-Corrosive and Anti-Rust Paints: 250 g/l

The calculation of VOC shall exclude water and tinting color added at the point of sale.

1.11 VOC REQUIREMENTS FOR INTERIOR COATINGS:

- A. Clear wood finishes, floor coatings, stains, sealers, and shellacs applied to the interior shall meet the VOC limitations defined in Rule 1113, "Architectural Coatings" of SCAQMD, of the State of California. The VOC limits defined by SCAQMD, based on 7/9/04 amendments, are as follows. VOC limits are defined in grams per liter, less water and less exempt compounds.

1. Clear Wood Finishes:	
a. Varnish	350
b. Sanding Sealers	350
c. Lacquer	550
2. Shellac:	
a. Clear	730
b. Pigmented	550
3. Stains	250
4. Floor Coatings	100
5. Waterproofing Sealers	250
6. Sanding Sealers	275
7. Other Sealers	200

The calculation of VOC shall exclude water and tinting color added at the point of sale.

1.12 SUBMITTALS:

- A. Submit Material Safety Data Sheets, for all applicable products in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Applicable products include, but are not limited to adhesives, sealants, carpets, paints and coatings. Material Safety Data Sheets shall indicate the Volatile Organic Compound (VOC) limits of products submitted. (If an MSDS does not include a product's VOC limits, then product data sheets, manufacturer literature, or a letter of certification from the manufacturer can be submitted in addition to the MSDS to indicate the VOC limits).
- B. Submit Environmental Building Materials Certification Form (EBMCF) as referenced in Section 01 81 13 SUSTAINABLE REQUIREMENTS FOR LEED BUILDINGS: For each field-applied adhesive, sealant, paint, and coating product, provide the VOC requirement, as provided in this Specification, for the relevant material category indicated on the documentation noted above.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13.13



**SECTION 01 81 19
INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 19

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 CONSTRUCTION IAQ MANAGEMENT GOALS FOR THE PROJECT:

- A. The City of New York has determined that this Project shall minimize the detrimental impacts on Indoor Air Quality (IAQ) resulting from construction activities. Factors that contaminate indoor air, such as dust entering HVAC systems and ductwork, improper storage of materials on-site, poor housekeeping, shall be minimized.

1.3 RELATED SECTIONS:

- A. All sections of the Specifications related to interior construction, MEP systems, and items affecting indoor air quality.
- B. Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
- C. Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
- D. Division 9 (of the Specifications): Finishes.

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Volatile Organic Compounds (VOC's): Chemical compounds common in and emitted by many building products, including solvents in paints, coatings, adhesives and sealants, wood preservatives, composite wood binder, and foam insulations. Not all VOC's are harmful, but many of those contained within building products contribute to the formation of smog and may irritate building occupants by their smell and/or health impact.

- D. Materials that act as “sinks” for VOC contamination: Absorptive materials, typically dry and soft materials (such as textiles, carpeting, acoustical ceiling tiles and gypsum board) that readily absorb VOC’s emitted by “source” materials and release them over a prolonged period of time.
- E. Materials that act as “sources” for VOC contamination: Products with high VOC contents that emit VOC’s either rapidly during application and curing (typically “wet” products, such as paints, sealants, adhesives, caulks and sealers) or over a prolonged period (typically “dry” products such as flooring coverings with plasticizers and engineered wood with formaldehyde).

1.5 REFERENCES, RESOURCES:

- A. “IAQ Guidelines for Occupied Buildings Under Construction”, First Edition, November 1995, The Sheet Metal and Air Conditioner Contractors National Association (SMACNA). (703) 803-2980, www.smacna.org.
- B. ANSI/ASHRAE 52.2-1999, “Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size”, www.ashrae.org

1.6 LEED BUILDING GENERAL REQUIREMENTS:

- A. Implement practices and procedures as necessary to meet the project’s environmental performance goals as set forth in the specific requirements of this section. Specific project goals that may impact this area of work include: use of recycled-content materials; use of low-emitting materials; construction waste recycling; and the implementation of a construction indoor air quality management plan. Ensure that the requirements related to these goals, as defined in this Section, are implemented to the fullest extent. Substitutions or other changes to the work shall not be allowed if such changes compromise the stated LEED BUILDING Performance Criteria.

1.7 CONSTRUCTION IAQ MANAGEMENT PLAN :

- A. The Contractor shall prepare a Construction IAQ Management Plan in coordination with each subcontractor and submit the IAQ Management Plan to the Commissioner for approval in accordance with Section 01 33 00, SUBMITTAL PROCDEURES. The Construction IAQ Management Plan shall meet the following criteria:
 - 1. Construction activities shall be planned to meet or exceed the minimum requirements of the Sheet Metal and Air Conditioning National Contractors’ Association (SMACNA) “IAQ Guidelines for Occupied Buildings under Construction”, First Edition, 1995.
 - 2. Absorptive materials shall be protected from moisture damage when stored on-site and after installation.
 - 3. If air handlers are to be used during construction, filtration media with a Minimum Efficiency Reporting Value (MERV) of 8 must be used at each return air grill, as determined by ASHRAE 52.2-1999.
 - 4. Filtration media shall be replaced immediately prior to occupancy. Filtration media shall have a Minimum Efficiency Reporting Value (MERV) of 13 as determined by ASHRAE 52.2-1999 if the project is pursuing Indoor Air Quality Credit 5: Indoor Chemical Pollutant Source Control.
 - 5. A “Sequence of Finish Installation Plan” shall be developed, highlighting measures to reduce the absorption of VOCs by materials that act as “sinks”.
 - 6. Upon approval of the Plan by the Commissioner, it shall be implemented by the Contractor through the duration of the construction process, and documented in accordance with the Submittal Requirements of Sub-Section 1.8 herein.



B. Further description of the Construction IAQ Management Plan requirements is as follows:

1. SMACNA Guidelines: Chapter 3 of the referenced "IAQ Guidelines for Occupied Buildings Under Construction", outline IAQ measures in five categories as listed below. The Construction IAQ Management Plan shall be organized in accordance with the SMACNA format, and shall address measures to be implemented in each of the five categories (including subsections). All subsections shall be listed in the Plan; items that are not applicable for this project should be listed as such.
 - a. HVAC Protection
 - 1) Protect air handling and distribution equipment and air supply and return ducting during construction.
 - 2) All ductwork arriving on site will be sealed with plastic sheeting and stored on pallets or dunnage until installed.
 - 3) Cover and protect all exposed air inlets and outlets, openings, grilles, ducts, plenums, etc. to prevent water, moisture, dust and other contaminant intrusion.
 - 4) Apply protection immediately after ducting.
 - 5) Protect ducting runs at the end of day's work.
 - 6) Inspect temporary filtration weekly and replace as required to maintain the proper ventilation rates in the building.
 - b. Source Control
 - 1) Protect stored on-site or installed absorptive or porous materials.
 - 2) Do not use wet or damaged porous materials in the building.
 - 3) Recover, isolate, and ventilate containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications.
 - 4) Exhaust fumes from idling vehicles and gasoline fueled tools through use of funnels or temporary piping.
 - 5) Containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, shall be closed when not in use.
 - c. Pathway Interruption
 - 1) Depressurize work areas to contain dust and odors.
 - 2) Pressurize occupied spaces to prevent intrusion of dust and odors.
 - 3) Erect barriers to contain construction areas.
 - 4) Relocate pollutant sources.
 - 5) Temporarily seal the building and provide 100% outside air for ventilation.
 - d. Housekeeping
 - 1) Store materials on elevated platforms under cover, in a designated dry, clean location, prior to unpacking for installation.
 - 2) If materials are not stored in an enclosed location, cover tops and sides of material with waterproof sheeting, securely tied.
 - 3) Institute cleaning activities to remove contaminants from the building prior to occupancy. Clean all coils, air filters, and ductwork prior to performing testing, adjusting, and balancing of HVAC systems.
 - 4) Sweep the work area on a daily basis. Use an efficient and effective dust collecting method such as damp cloth, wet mop, or vacuum with particulate filters. Activities which produce high levels of dust shall be cleaned up immediately upon completion.
 - 5) Spills or excess applications of products containing solvents, or with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, must be removed immediately.
 - 6) Dust all walls prior to application of finishes.
 - 7) Vacuum all stud tracks prior to application of insulation.
 - 8) Materials which become contaminated through direct exposure to moisture from



- precipitation, plumbing leaks, or condensation shall be replaced by the Contractor.
- e. Scheduling
- 1) Phase construction such that absorptive materials are installed only in areas that are weathertight.
 - 2) Schedule activities that utilize “sources” of VOC contamination to take place prior to installing high absorbent materials that will act as “sinks” for contaminants.
 - 3) Review of the appropriate components of the Construction IAQ Management Plan shall be a regular action topic at weekly site coordination meetings. Implementation of the Plan shall be documented in the meeting minutes.
2. Protection of Materials from Moisture Damage: As part of the “Housekeeping” section of the Construction IAQ Management Plan, measures to prevent installed materials or material stored on-site from moisture damage shall be described. This section should also describe measures to be taken if moisture damage does occur to absorptive materials during the course of construction.
3. Replacement of Filtration Media: Under the “HVAC Protection” section of the Construction IAQ Management Plan, a description of the filtration media in all ventilation equipment shall be provided. The description shall include replacement criteria for filtration media during construction, and confirmation of filtration media replacement for all equipment immediately prior to occupancy.
4. Sequence of Finish Installation for Materials: Where feasible, absorptive materials shall be installed after the installation of materials or finishes which have high short-term emissions of VOC’s, formaldehyde, particulates, or other air-borne compounds. Absorptive materials include, but are not limited to: carpets; acoustical ceiling panels; fabric wall coverings; insulations (exposed to the airstream); upholstered furnishings; and other woven, fibrous or porous materials. Materials with high short-term emissions include, but are not limited to: adhesives, sealants and glazing compounds (specifically those with petrochemical vehicles or carriers); paints, wood preservatives and finishes; control and/or expansion joint fillers; hard finishes requiring adhesive installation; gypsum board (with associated finish processes and products); and composite or engineered wood products with formaldehyde binders.
5. Develop and implement an Indoor Air Quality (IAQ) Management Plan for the pre-occupancy phase as follows:

OPTION 1 — Flush-Out

- After construction ends, prior to occupancy and with all interior finishes installed, perform a building flush-out by supplying a total air volume of 14,000 cu.ft. of outdoor air per sq.ft. of floor area while maintaining an internal temperature of at least 60 degrees F and relative humidity no higher than 60%.

OR

- If occupancy is desired prior to completion of the flush-out, the space may be occupied following delivery of a minimum of 3,500 cu.ft. of outdoor air per sq.ft. of floor area to the space. Once a space is occupied, it shall be ventilated at a minimum rate of 0.30 cfm/sq.ft. of outside air or the design minimum outside air rate determined in EQ Prerequisite 1, whichever is greater. During each day of the flush-out period, ventilation shall begin a minimum of three hours prior to occupancy and continue during occupancy. These conditions shall be maintained until a total of 14,000 cu.ft./sq.ft. of outside air has been delivered to the space.

OR



OPTION 2 — Air Testing

- Conduct baseline IAQ testing, after construction ends and prior to occupancy, using testing protocols consistent with the United States Environmental Protection Agency Compendium of Methods for the Determination of Air Pollutants in Indoor Air and as additionally detailed in the LEED-NC Reference Guide.
- Demonstrate that the contaminant maximum concentrations listed below are not exceeded.

CONTAMINANT	MAXIMUM CONCENTRATION
Formaldehyde	27 parts per billion
Particulates (PM10)	50 micrograms per cubic meter
Total Volatile Organic Compounds (TVOC)	500 micrograms per cubic meter
* 4-Phenylcyclohexene (4-PCH)	6.5 micrograms per cubic meter
Carbon Monoxide (CO)	9 part per million and no greater than 2 parts per million above outdoor levels
* This test is only required if carpets and fabrics with styrene butadiene rubber (SBR) latex backing material are installed as part of the base building systems.	

- For each sampling point where the maximum concentration limits are exceeded, conduct additional flush-out with outside air and retest the specific parameter(s) exceeded to indicate the requirements are achieved. Repeat procedure until all requirements have been met. When retesting non-complying building areas, take samples from the same locations as in the first test.
- The air sample testing shall be conducted as follows:
 - a. All measurements shall be conducted prior to occupancy, but during normal occupied hours and with the building ventilation system starting at the normal daily start time and operated at the minimum outside air flow rate for the occupied mode throughout the duration of the air testing.
 - b. The building shall have all interior finishes installed, including but not limited to millwork, doors, paint, carpet and acoustic tiles. Non-fixed furnishings such as workstations and partitions are encouraged, but not required, to be in place for the testing.
 - c. The number of sampling locations will vary depending upon the size of the building and number of ventilation systems. For each portion of the building served by a separate ventilation system, the number of sampling points shall not be less than one per 25,000 sq.ft., or for each contiguous floor area, whichever is larger, and include areas with the least ventilation and greatest presumed source strength.
 - d. Air samples shall be collected between 3 feet and 6 feet from the floor to represent the breathing zone of occupants, and over a minimum 4-hour period.
- 6. Implementation and Coordination: Implement the Construction IAQ Management Plan, and coordinate the Plan with all affected trades. Designate one individual as the Construction IAQ Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation. Include provisions in the Construction IAQ Management Plan for addressing conditions in the field that do not adhere to the Plan, including provisions to implement a stop work order, or to rectify non-compliant conditions.



- a. Distribution: The Contractor shall distribute copies of the Construction IAQ Management Plan in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- b. Instruction: The Contractor shall provide on-site instruction of appropriate site management to all Contractor's Subcontractors.
- c. Monitoring: The Construction IAQ Representative shall monitor the implementation of the Construction IAQ Management Plan.

1.8 SUBMITTALS:

Submit the following LEED-required records and documents in accordance with Section 01 33 00, SUBMITTAL PROCEDURES and Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.

- A. A copy of the Construction IAQ Management Plan as defined in Sub-Section 1.07 herein.
- B. Product cut-sheets for all filtration media used during construction and installed immediately prior to occupancy, with MERV values highlighted. Cut sheets shall be submitted with the Contractor's or Subcontractor's 'approved' stamp as confirmation that the products are the products installed on the project.
- C. Provide the Commissioner with a minimum of 18 photographs as required under the provision for Special Photographs, in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION, comprised of at least six photographs taken on three different occasions during construction. The photographs shall document the implementation of the Construction IAQ Management Plan throughout the course of the project construction. Examples include photographs of ductwork sealing and protection, temporary ventilation measures, and conditions of on-site materials storage (to prevent moisture damage). Photographs shall include integral date stamping, and shall be submitted with brief descriptions of the Construction IAQ Management Plan measure documented, or be referenced to project meeting minutes or similar project documents which reference to the Construction IAQ Management Plan measure documented.
- D. A copy of the project's TAQ Testing report if applicable.

1.9 QUALITY ASSURANCE:

- A. The Contractor shall be responsible for preparing and implementing the Construction IAQ Management Plan and shall coordinate and incorporate the work of its subcontractors in the IAQ Management Plan.
- B. Responsibility of Subcontractors: Subcontractors for this project shall be responsible to cooperate with the Contractor in the preparation and implementation of the Construction IAQ Management Plan.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 19



SECTION 01 91 13
GENERAL COMMISSIONING REQUIREMENTS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 91 13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. OPR and BoD documentation are included by reference for information only.
- C. The Commissioning Plan, prepared by the Commissioning Agent (CxA) under separate contract with the City of New York, contains requirements that apply to this section.

1.2 SUMMARY:

- A. This Section includes general requirements that apply to implementation of Commissioning without regard to systems, subsystems, and equipment being commissioned.
- B. This Section includes:
 - 1. Definitions
 - 2. Commissioning Team
 - 3. City's Responsibilities
 - 4. Each Contractor's Responsibilities
 - 5. Commissioning Authority's/Agent's (CxA) Responsibilities
 - 6. Commissioning Documentation
 - 7. Submittals
 - 8. Coordination

1.3 RELATED SECTIONS: Include without limitation the following:

- A. "HVAC Commissioning Requirements" indicated in other sections of the project specifications for specific requirements for commissioning HVAC systems.
- B. This project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED procedures, and specific commissioning requirements of the Project Specifications, whichever is more stringent. The Contractor shall cooperate with the CxA and provide whatever assistance is required.
- C. Related Sections include without limitation the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
 - 3. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 - 5. Section 01 79 00 DEMONSTRATION AND OWNERS PRE-ACCEPTANCE ORIENTATION
 - 6. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioner: The Commissioner of the Department of Design and Construction of the City of New York, his/her successors, or duly authorized representative(s).
- D. BoD: Basis of Design: A document, prepared by the Consultant Architect/Engineer, that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that support the design process.
- E. Commissioning Plan: A document that outlines the organization, schedule, allocation of resources, and documentation requirements of the commissioning process.
- F. CxA: Commissioning Agent (Aka Commissioning Authority) under separate contract with the City of New York to provide Commissioning Services for this project.
- G. OPR: Owner's (City of New York) Project Requirements: A document, prepared by the Consulting Architect/Engineer) that details the functional requirements of a project and the expectations of how it will be used and operated. These include Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.
- H. Systems, Subsystems, Equipment, and Components: Where these terms are used together or separately, they shall mean "as-built" systems, subsystems, equipment, and components.
- I. TAB: Testing, Adjusting, and Balancing.

1.5 COMMISSIONING TEAM:

- A. Members Appointed by the Contractor and its Subcontractors: Individuals, each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions. The commissioning team shall consist of, but not be limited to, representatives of the Contractor, including Project superintendent and subcontractors, installers, suppliers, and specialists deemed appropriate by the CxA.
- B. Members Appointed by the City:
 - 1. Commissioning Authority/Agent (CxA): The designated person, company, or entity under separate contract with the City that plans, schedules, and coordinates the commissioning team to implement the commissioning process.
 - 2. Representatives of the facility user and operation and maintenance personnel.
 - 3. Consultant Architect/Engineer and other concerned entities.

1.6 CITY'S RESPONSIBILITIES:

- A. Provide the OPR documentation to the Commissioning Agent (CxA) for use in developing the commissioning plan; systems manual; operation and maintenance training plan; and testing plans and checklists.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities.

- C. Provide the BoD documents, prepared by the Consulting Architect/Engineer and approved by the Commissioner, to the Commissioning Agent (CxA) for use in developing the commissioning plan, systems manual, and operation and maintenance training plan.

1.7 CONTRACTOR'S RESPONSIBILITIES:

- A. The Contractor shall provide utility services required for the commissioning process.
- B. As a member of the Commissioning Team, the Contractor and subcontractor(s) shall assign representatives with expertise and authority to act on behalf of the Contractor and its subcontractor(s) and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
 - 1. Participate in scheduled construction-phase coordination and commissioning team meetings.
 - 2. Integrate and coordinate commissioning process activities with the construction schedule.
 - 3. Review and accept commissioning process test procedures provided by the CxA.
 - 4. Review and accept construction checklists provided by the CxA.
 - 5. Perform testing required in the Commissioning Schedule as per the Commissioning Process test procedures provided by the CxA.
 - 6. Complete installation checklists as Work is completed and return to CxA through the Resident Engineer.
 - 7. Cooperate with the CxA for resolution of issues recorded in the Issues Log.
 - 8. Evaluate performance deficiencies identified in test reports and, in collaboration with entity responsible for system and equipment installation, recommend corrective action.
 - 9. Submit As-Built documents, operation and maintenance manuals for systems and subsystems, and equipment in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.
 - 10. Provide orientation sessions for operation and maintenance personnel (sessions will be video recorded by the CxA) in accordance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

1.8 COMMISSIONING AGENT'S (CxA) RESPONSIBILITIES:

- A. Organize and lead the commissioning team.
- B. Prepare a construction-phase commissioning plan. Collaborate through the Resident Engineer with each Contractor and with subcontractors to develop test and inspection procedures. Include design changes and coordinate commissioning activities with the overall Project schedule. Identify commissioning team member responsibilities, by name, firm, and trade specialty, for performance of each commissioning task.
- C. Review and comment in accordance with Section 01 33 00, SUBMITTAL PROCEDURES, on submittals from the Contractor for compliance with the OPR, BoD, Contract Documents, and construction-phase commissioning plan. Review and comment on performance expectations of systems and equipment and interface between systems relating to the OPR and BoD.
- D. Coordinate with the Resident Engineer to convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss progress of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent CxA will prepare and distribute minutes to commissioning team members and attendees within three workdays of the commissioning meeting.
- E. At the beginning of the construction phase, coordinate with the Resident Engineer's kick-off meeting schedule to conduct an initial construction-phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals, operation and maintenance training sessions, TAB Work, and Project completion.

- F. Observe and inspect construction. Report progress and deficiencies to the Commissioner. In addition to compliance with the OPR, BoD, and Contract Documents, inspect systems and equipment installation for adequate accessibility required for component maintenance replacement and repair.
- G. Prepare Project-specific test and inspection procedures and checklists.
- H. Coordinate with the Resident Engineer to schedule, direct, witness, and document tests, inspections, and systems startup.
- I. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.
- J. Certify date of acceptance and startup for each item of equipment for start of warranty periods.
- K. Review and comment on operation and maintenance documentation and systems manual outline for compliance with the OPR, BoD, and Contract Documents. Operation and maintenance documentation requirements are specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS.
- L. Record and edit demonstration and orientation sessions on DVD.
- M. Prepare commissioning reports.
- N. Assemble the final commissioning documentation, including the commissioning report and Systems Manual.

1.9 COMMISSIONING DOCUMENTATION:

The Contractor shall assist the Commissioning Agent (CxA) in the development and compiling of the following Commissioning Documentation:

- A. Index of Commissioning Documents: The Commissioning Agent (CxA) will prepare an index including the storage location of each document.
- B. OPR: A written document prepared by the Commissioning Agent (CxA) that details the functional requirements of the Project and expectations of how it will be used and operated. This document includes the Project and design goals, measurable performance criteria, budgets, schedules, success criteria, and supporting information.
- C. BoD Document: A document prepared by the Consulting Architect/Engineer that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that explain the designed systems.
- D. Commissioning Plan: A document prepared by the Commissioning Agent (CxA) that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process.
- E. Test Checklists: The Commissioning Agent (CxA) will develop test checklists for each system, subsystem, or equipment including interfaces and interlocks, and include a separate entry, with space for comments, for each item to be tested. The CxA will prepare separate checklists for each mode of operation and provide space to indicate whether the mode under test responded as required. Space will be provided for testing personnel to sign off on each checklist. Specific checklist content requirements are specified in other sections of the project specifications.
- F. Inspection Checklists will be signed by the Contractor, Subcontractor(s), Installer(s), and CxA certifying that systems, subsystems, equipment, and associated controls are ready for testing.
- G. Test and Inspection Reports: The Commissioning Agent (CxA) will record test data, observations, and measurements on test checklists. Photographs, forms, and other means appropriate for the application will be included with data. CxA shall compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

- H. Corrective Action Documents: The Commissioning Agent (CxA) will document corrective action taken for systems and equipment that fail tests and include required modifications to systems and equipment and revisions to test procedures, if any. The Contractor shall retest systems and equipment requiring corrective action. The CxA will document retest results.
- I. Issues Log: The Commissioning Agent (CxA) will prepare and maintain an issues log that describes design, installation, and performance issues that are at variance with the OPR, BoD, and Contract Documents. The log will identify and track issues as they are encountered, documenting the status of unresolved and resolved issues.
 - 1. Commissioning Report: The Commissioning Agent (CxA) will document results of the commissioning process including unresolved issues and performance of systems, subsystems, and equipment. The commissioning report will indicate whether systems, subsystems, and equipment have been completed and are performing according to the OPR, BoD, and Contract Documents.
- J. Systems Manual: The Commissioning Agent (CxA) will gather required information and compile systems manual as specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS..

1.10 SUBMITTALS:

- A. Commissioning Plan Pre-final Submittal: The Commissioning Agent (CxA) will submit six (6) copies of the pre-final commissioning plan to the Commissioner for review and distribution.
- B. Commissioning Plan Final Submittal: The Commissioning Agent (CxA) will submit six (6) hard copies and electronically formatted information of the final commissioning plan to the Commissioner. The final submittal will address previous review comments.
- C. Test and Inspection Reports: CxA will submit test and inspection reports.
- D. Corrective Action Documents: CxA will submit corrective action documents.

1.11 COORDINATION:

- A. Coordinating Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer's regularly scheduled construction progress meetings to conduct coordination meetings of the commissioning team to review progress on the commissioning plan, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- B. Pre-testing Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer to conduct pretest meetings of the commissioning team to review startup reports, pretest inspection results, testing procedures, testing personnel and instrumentation requirements, and manufacturers' authorized service representative services for each system, subsystem, equipment, and component to be tested.
- C. Testing Coordination: The Commissioning Agent (CxA) will coordinate with the Resident Engineer the sequence of testing activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
 - 1. Coordinate schedule times with the Resident Engineer for tests, inspections, obtaining samples, and similar activities.
- D. Manufacturers' Field Services: The Commissioning Agent (CxA) will coordinate services of manufacturers' field services.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 OPERATION & MAINTENANCE MANUALS

- A. General
1. The CxA shall review the Operation & Maintenance manuals provided by the Contractor or subcontractors for completeness of the document. The review process shall verify that Operation & Maintenance instructions meet specifications and are included for all commissioned equipment furnished by the Contractor.
 2. Published literature shall be specifically oriented to the provided equipment, indicating required operation and maintenance procedures, parts lists, assembly / disassembly diagrams and related information.
 3. The Contractor shall incorporate the standard technical literature into system specific formats for this facility as designed and as actually installed. The resulting Operation & Maintenance information shall be system specific, concise, to the point and tailored specifically to this facility. The CxA shall review these documents as necessary for final corrections by the Contractor.
- B. The Operation & Maintenance Manual review and coordination efforts shall be completed prior to Owner orientation sessions, as these documents are to be utilized in the training sessions.
- C. System Operations Manual
1. The CxA shall prepare and deliver these documents with inputs from other agencies. The contractors will confirm the proper documents are onsite and readily available. Typically, the manual includes the following:
 - a. Commissioned systems single line diagrams (Mechanical, Electrical, Plumbing, and Building Management System (BMS) subcontractors).
 - b. As built sequences of operations, control drawings and original set points (Design Consultant and BMS subcontractor)
 - c. Operating instructions for integrated building systems (mechanical and BMS subcontractors).
 - d. Recommended schedule of maintenance requirements and frequency (subcontractors).
 - e. Recommended schedule for calibrating sensors and actuators (BMS subcontractor)

3.2 DEMONSTRATION AND INSTRUCTION

- A. The Contractor shall schedule and coordinate instruction sessions for the facility's staff for each commissioned system. Demonstrations shall be held per Contract Documents, along with the appropriate schematics, handouts and visual / audio training aids onsite with equipment.
- B. The equipment vendors shall provide instruction on the specifics of each major equipment item including philosophy, troubleshooting and repair techniques.
- C. For additional prescription pertinent to instruction, refer to other specific divisions for demonstration and instruction requirements.

3.3 WARRANTY REVIEW / SEASONAL TESTING

- A. The CxA will return upon the start of the new season (cooling or heating) after project completion to conduct performance tests that could not be performed due to ambient conditions. The seasonal testing will only be performed if unsuitable loads / conditions were unavailable during the performance testing stages (in other words; the requirement for testing is warranted).
- B. If agreed upon by facility, Seasonal Testing can also be used for the Warranty Review. During which the CxA will interview the occupants, maintenance staff, review the operation of the building, provide recommendations for installation and operational problems and document warranty and operational issues in the issues database.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

3.4 RECORD DRAWINGS

- A. The CxA shall review the as built contract documents to verify incorporation of both design changes and as built construction details. Discrepancies noted shall be corrected by the appropriate party.

END OF SECTION 01 91 13



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS

Issue Date - June 01, 2013

Revised - January 15, 2015

NO TEXT

GENERAL COMMISSIONING REQUIREMENTS

01 91 13 - 8

FMS ID: LNXEA08BX



Department of Design and Construction

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

Two (2) Bronx Branch Libraries -
Replacement of HVAC & BMS

LOCATION: 2150 University Ave and 1215 Morrison Ave
BOROUGH: Bronx 10453 and 10472
CITY OF NEW YORK

CRE Air Conditioning Co.
Contractor

Dated May 9th, 2018

Approved as to Form
Certified as to Legal Authority
[Signature]
Acting Corporation Counsel

cr
11/8/17

Dated November 8, 2017

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated _____, 20____





Department of
Design and
Construction

PROJECT ID:

LNXE08BX

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 3 OF 3

**ADDENDUM TO THE GENERAL
CONDITIONS**

SPECIFICATIONS

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR:

**Two (2) Bronx Branch Libraries -
Replacement of HVAC & BMS**

LOCATION:
BOROUGH:
CITY OF NEW YORK

2150 University Ave and 1215 Morrison Ave
Bronx 10453 and 10472

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

NYPL

Greenman Pederson Inc.

Date:

July 10, 2017



18-003



THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

ADDENDUM TO THE GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS

The General Conditions are hereby amended in accordance
with the terms and conditions set forth in this Addendum.

I. PROJECT DESCRIPTION

FMS #: LNXEA08BX

PROJECT NAME: NYPL- Two (2) Bronx Branch Libraries Replacement of HVAC and BMS

PROJECT DESCRIPTION: This Project consists of Upgrading the existing HVAC systems by replacing existing equipment, ductwork and controls to provide fully functional HVAC systems with web-based Building Management System (BMS) for two (2) Bronx Branch Libraries for Francis Martin and Clason's Point branches. In Francis Martin Branch Library: Upgrade the existing Fire Detection and Alarm system

Francis Martin Branch Library

Clason's Point Branch Library

PROJECT LOCATION: 2150 University Ave.

1215 Morrison Ave.

BOROUGH: Bronx

Bronx

CITY OF NEW YORK

CITY OF NEW YORK

ZIP CODE: 10453

10472

COMMUNITY BOARD #: 205

209

LANDMARK STATUS:

DESIGNATED LANDMARK STRUCTURE OR SITE: **NO**

If this is a Designated Landmark Structure or Site, Section 01 3591, Historic Treatment Procedures applies to this project.

LANDMARK QUALITY STRUCTURE: **NO**

If this is a Landmark Quality Structure, Section 01 3591, Historic Treatment Procedures applies to this project.

II. LEED GREEN BUILDING REQUIREMENTS

'Not Used'.

III. COMMISSIONING REQUIREMENTS

'Not Used'.

IV. PROJECT MANAGEMENT

DDC shall publicly bid and enter into all contracts for the Project. DDC shall manage the Project using its own personnel.

DDC shall publicly bid and enter into all contracts for the Project. A Construction Management firm (the "CM") hired by DDC shall manage the Project. The Contractor is advised that the CM shall serve as the representative of the Commissioner at the site and shall, subject to review by the Commissioner, be responsible for the inspection, management, coordination and administration of the required construction work, as delineated in the article of the Standard Construction Contract entitled "The Resident Engineer".

V. CONTRACTS FOR THE PROJECT

The Project consists of a single contract, the Contract for General Construction Work. The Contractor for General Construction Work is responsible for the performance of all required work for the Project as set forth in the Contract Documents (General Conditions, Drawings and Specifications), including all responsibilities and obligations assigned to separate Contractors for the following subdivisions of the work: Plumbing Work, HVAC Work, and Electrical Work. All responsibilities and obligations in the Contract Documents assigned to separate Contractors for such subdivisions of the work are the responsibility of the Contractor for General Construction Work.

The separate Contracts pertaining to this Project are set forth below:

Contract No. 1 - Contract for General Construction Work

VI. SCHEDULES

The Contractor is advised that Schedules A through F are attached to, and incorporated as part of, this Addendum to the General Conditions. These schedules contain important information that is specific to this Project. The Contractor is advised to carefully review these schedules.

VII. APPLICABILITY OF SECTIONS/SUB-SECTIONS AND AMENDED SUB-SECTIONS

The Contractor is advised that various Sections/Sub-Sections in the General Conditions may not apply to this Project or may apply as amended. Such Sections/Sub-Sections advise the Contractor to "Refer to the Addendum for the applicability of this Section/Sub-Section." Such Sections/Sub-Sections are set forth below. A check mark indicates whether the Section/Sub-Section (1) applies to the Project, (2) does not apply to the Project, or (3) applies to the Project as amended. If no box is checked, the Section/Sub-Section, as set forth in the General Conditions, applies to the Project. Amended Sections/Sub-Sections, if any, are set forth following this list of Sections.

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 1000	1.4 (B)	Scope and Intent / LEED		x	
	1.4(C)	Scope and Intent / Commissioning		x	
01 3233		Photographic Documentation		x	
01 3300	1.7 (A-D)	LEED Submittals		x	
01 3503		General Mechanical Requirements	x		
01 3506	3.2 (A-B)	Electrical Conduit System Including Boxes (Pull, Junction and Outlet)	x		
	3.3 (A-E)	Electrical Wiring Devices	x		
	3.4 (A-I)	Electrical Conductors and Terminations	x		
	3.5 (A-B)	Circuit Protective Devices	x		
	3.6 (A-J)	Distribution Centers	x		
	3.7 (A-I)	Motors	x		
	3.8 (A-I)	Motor Control Equipment	x		
01 3591		Historic Treatment Procedures		x	
01 5000	3.2 (A)	Temporary Water Facilities / Temporary Water		x	
	3.2 (B)	Temporary Water Facilities / Temporary Water – Work in Existing Facilities		x	
	3.3 (B)	Temporary Sanitary Facilities / Self-Contained Toilet Units		x	
	3.3 (C)	Temporary Sanitary Facilities / Existing Toilets	x		
	3.4 (B) 1	Temporary Power, Lighting, and Site Lighting / Connection to Utility Lines		x	

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 5000	3.4 (B) 2	Temporary Power, Lighting, and Site Lighting / Connection to Existing Electrical Power Service	x		
	3.4 (B) 3	Temporary Power, Lighting, and Site Lighting / Electrical Generator Power Service		x	
	3.4 (D)	Temporary Power, Lighting, and Site Lighting / Temporary Lighting		x	
	3.4 (E)	Temporary Power, Lighting, and Site Lighting / Site Security Lighting (for New Construction Only)		x	
	3.5 (A-J)	Temporary Heat		x	
	3.8 (A)	DDC Field Office / Office Space in Existing Building	x		
	3.8 (B)	DDC Field Office / DDC Field Office Trailer		x	
	3.8 (B-3a)	DDC Field Office / DDC Managed Field Office Trailer	x		
	3.8 (B-3b)	DDC Field Office / CM Managed Field Office Trailer		x	
	3.8 (D)	DDC Field Office / Additional Equipment for the DDC Field Office			x
	3.13(A-D)	Work Fence Enclosure		x	
	3.17(B)	Project Rendering		x	
	3.18 (A-C)	Security Guards / Fire Guards on Site		x	
01 5411	3.1 (A-J)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Up To and Including 15 Stories		x	
	3.2 (A-M)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Over 15 Stories		x	
	3.3 (A-E)	Temporary Use, Operation and Maintenance of Elevators During Construction for Existing Buildings	x		
01 7300	3.3 (A-I)	Surveys		x	
	3.4 (A-B)	Borings		x	
	3.12 (A-D)	Sleeves and Hangers	x		
	3.13 (A)	Sleeve and Penetration Drawings	x		
	3.15 (A)	Location of Partitions		x	
01 7419	1.5 (C)	Waste Management Performance Requirements / LEED Certification		x	
01 7900		Demonstration and Owner's Pre-Acceptance Orientation	x		
01 8113		Sustainable Design Requirements for LEED Buildings		x	
01 8113.13		VOC Limits for Adhesives, Sealants, Paints and Coatings for LEED Buildings		x	
01 8119		Indoor Air Quality Requirements for LEED Buildings		x	
01 9113		General Commissioning Requirements		x	

AMENDED SECTIONS/SUB-SECTIONS

The Contractor is advised that the amended Sub-Sections set forth below are included in the General Conditions and apply to the Project.

015000. Item 3.8 D. Provide one (1) computer workstation

ADDITIONAL SECTIONS/SUB-SECTIONS

Not Used

VIII. SPECIAL EXPERIENCE REQUIREMENTS FOR THE PROJECT

See Volume 1 – Bid Booklet page 3 for Special Experience Requirement

IX. REVISIONS: SPECIFICATIONS AND CONTRACT DRAWINGS

The Specifications and the Contract Drawings for the Project are revised in accordance with the provisions set forth below.

- (1) Owner: Wherever the term "Owner" is used in the Specifications and/or the Contract Drawings, such term shall mean the City of New York.
- (2) Other Entities: In the event any entity other than the City of New York is referred to or named as the "Owner" in the Specifications and/or the Contract Drawings, the name of such other entity is deemed deleted and replaced with the "City of New York".

- (3) Architect / Engineer: Wherever the words "Architect", "Engineer", "Architect / Engineer" or "Architect and/or Engineer" are used in the Specifications and/or the Contract Drawings, such words are deemed deleted and replaced with the word "Commissioner".
- (4) Products / Manufacturers: Wherever the Specifications and/or the Contract Drawings require the contractor to provide a particular product (i.e., material and/or equipment) from a designated manufacturer and/or vendor, the term "or approved equal" is deemed inserted, even if only one product and/or manufacturer is specified, except as otherwise provided below.
- (a) Proprietary Items: If the Bid Booklet contains a Notice which identifies a particular product from a designated manufacturer as a "Proprietary Item", the Contractor shall be required to provide such specified product. In such case, no substitution or "approved equal" will be permitted.
- (5) Special Experience Requirements: Special Experience Requirements for the Project, if any, are set forth in the Bid Booklet. Special Experience Requirements may apply to contractors, subcontractors, installers, manufacturers and/or suppliers. If the Specifications and/or the Contract Drawings contain any Special Experience Requirement that is not set forth in the Bid Booklet, such Special Experience Requirement is deemed deleted, except as otherwise provided below.
- (a) Any Special Experience Requirement that provides that the entity performing the work or supplying the material must have more than three (3) years of experience, is revised to provide that the entity performing the work or supplying the material must have three (3) years of experience, except as described in paragraph (b) below.
- (b) Any Special Experience Requirement that pertains to the abatement of hazardous materials shall not be subject to the deletion and/or revision set forth above. Such Special Experience Requirement shall remain in full force and effect.
- (c) Any Special Experience Requirement that provides that the entity performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such entity must be properly trained for the specified work.
- (d) Any Special Experience Requirement that provides that the individual workers performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such individual workers must be properly trained for the specified work.
- (6) Alternate Bids: If the agency is requesting the submission of Alternate Bids, a Notice regarding such Alternate Bids is set forth in the Bid Booklet. In the event of any conflict or inconsistency between (1) the Notice regarding Alternate Bids set forth in the Bid Booklet and (2) a provision in the Specifications and/or the Contract Drawings regarding Alternate Bids, the Notice set forth in the Bid Booklet shall prevail. If the agency is not requesting the submission of Alternate Bids, as indicated by the absence of a Notice in the Bid Booklet, and the Specifications and/or the Contract Drawings contain any provision regarding Alternate Bids, such provision is deemed deleted.
- (7) Contractor Retained Engineer: If the Specifications and/or the Contract Drawings require the Contractor to retain an Engineer to provide engineering services for the Project, the following sentence is deemed inserted: "Such Engineer must be a Professional Engineer, licensed in the State of New York."
- (8) LEED Related Provisions: If the Specifications and/or the Contract Drawings require the Contractor to purchase FSC certified wood, rapidly renewable materials, or materials within 500 miles, such provisions are deemed deleted and replaced with the requirement that if the contractor has purchased FSC certified wood, rapidly renewable materials, or materials within 500 miles, the contractor shall submit such forms or documentation as may be required by the City in order for the USGBC to certify that the Project qualifies for the related LEED credit(s).
- (9) Guarantees: Requirements for Guarantees and Maintenance are set forth in Schedule B, which is included in the Addendum to the General Conditions. In the event of any conflict or inconsistency between (1) a guarantee and/or maintenance requirement set forth in the Specifications and/or the Contract Drawings and (2) a guarantee and/or maintenance requirement set forth in Schedule B, the guarantee and/or maintenance

guarantee and/or maintenance requirement set forth in Schedule B, the guarantee and/or maintenance requirement set forth in Schedule B shall prevail.

- (10) Warranties: Requirements for Warranties are set forth in Schedule B, which is included in the Addendum to the General Conditions.
- (a) In the event of any conflict or inconsistency between (1) a warranty requirement set forth in the Specifications and/or the Contract Drawings and (2) a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall prevail.
 - (b) In the event a warranty requirement set forth in the Specifications and/or the Contract Drawings is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications and/or the Contract Drawings, shall remain in full force and effect.
 - (c) In the event a warranty requirement for a particular item of material or equipment is omitted from Schedule B, as well as from the Specifications or the Contract Drawings, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (11) Exculpatory Provisions: In the event the Specifications and/or the Contract Drawings contain any provision whereby the consultant and/or any of its officers, employees or agents, including subconsultants, is absolved of responsibility for any act or omission, such provision is deemed deleted.
- (12) Insurance: Provisions regarding insurance coverage the Contractor is required to provide are set forth in Article 22 of the City of New York Standard Construction Contract and Schedule A, which is included in the Addendum to the General Conditions. In the event the Specifications and/or the Contract Drawings contain any provision regarding insurance requirements, such provision is deemed deleted.
- (13) Indemnification: Provisions regarding indemnification are set forth in Articles 7, 12, 22 and 57 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding indemnification, such provision is deemed deleted.
- (14) Dispute Resolution: Provisions regarding dispute resolution are set forth in Article 27 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding dispute resolution, such provision is deemed deleted.
- (15) Payment to Other Entities: In the event the Specifications and/or the Contract Drawings contain any provision which requires the Contractor to make payments to an entity other than a subcontractor and/or supplier providing services and/or material for the project, such provision is deemed deleted.
- (16) General Conditions: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the General Conditions, the General Conditions shall prevail.
- (17) Standard Construction Contract: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the City of New York Standard Construction Contract, the City of New York Standard Construction Contract shall prevail.

SCHEDULE A (FOR PUBLICLY BID PROJECTS)
PART I - Contract Requirements

Various Articles of the Contract refer to requirements which are set forth in Schedule A of the General Conditions. The Schedule set forth below specifies the following: (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the contract.

REFERENCE	ITEM	REQUIREMENTS	CONTRACT #1
Information For Bidders	Bid Security		See Attachment 1 – Bid Information in the Bid Booklet
Information For Bidders	Performance and Payment Bonds		See Attachment 1- Bid Information in the Bid Booklet
Article 14 Contract	Time of Substantial Completion	Consecutive Calendar Days	270
Article 15 Contract	Liquidated Damages	For each consecutive calendar day over completion time	\$ 200
Article 17 Contract	Sub-Contracts	Not to exceed Percent of Contract Price	60%
Article 21 Contract	Retainage	Percent of Voucher	If 100% bonds are required 5% If 100% bonds are not required, and Contract Price is \$1,000,000 or less 5% If 100% bonds are not required, and Contract Price is more than \$1,000,000 10%
Article 24 Contract	Deposit Guarantee	Percent of Contract Price	1%
Article 24 Contract	Period of Guarantee		See Schedule B of the Addendum to the General Conditions
Article 74 Contract	Statement of Work		Addenda, numbered: <u>1</u>
Article 75 Contract	Compensation to be Paid to Contractor		Amount for which the Contract was Awarded: <i>one million, seven hundred fifty-four thousand, three hundred seventy-nine</i> Dollars (<u>\$ 1,754,379.00</u>)
Article 79 Contract	MWBE Program		See MWBE Utilization Plan in the Bid Booklet

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Note: All certificate(s) of insurance submitted pursuant to Contract Article 22.3. 3 must be accompanied by a Certification by Broker consistent with Part III below and include the following information:

- For each insurance policy, the name and NAIC number of issuing company, number of policy, and effective dates;
- Policy limits consistent with the requirements listed below;
- Additional insureds or loss payees consistent with the requirements listed below; and
- The number assigned to the Contract by the City (in the "Description of Operations" field).

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<p>■ Commercial General Liability Art. 22.1.1</p>	<p>The minimum limits shall be \$1,000,000.00 per occurrence and \$2,000,000.00 per project aggregate applicable to this Contract.</p> <p>Additional Insureds:</p> <p>1. City of New York, including its officials and employees, with coverage at least as broad as ISO Forms CG 20 10 and CG 20 37, and</p> <p>2. All person(s) or organization(s), if any, that Article 22.1.1(b) of the Contract requires to be named as Additional Insured(s), with coverage at least as broad as ISO Form CG 20 26. The Additional Insured endorsement shall either specify the entity's name, if known, or the entity's title (e.g., Project Manager).</p> <p>3. The New York Public Library, Astor, Lenox and Tilden Foundations and its Trustees, officers, agents and employees.</p>
<p>■ Workers' Compensation Art. 22.1.2</p> <p>■ Disability Benefits Insurance Art. 22.1.2</p> <p>■ Employers' Liability Art. 22.1.2</p> <p><input type="checkbox"/> Jones Act Art. 22.1.3</p> <p><input type="checkbox"/> U.S. Longshoremen's and Harbor Workers Compensation Act Art. 22.1.3</p>	<p>Workers' Compensation, Employers' Liability, and Disability Benefits Insurance: Statutory per New York State law without regard to jurisdiction.</p> <p>Note: The following forms are acceptable: (1) New York State Workers' Compensation Board Form No. C-105.2, (2) State Insurance Fund Form No. U-26.3, (3) New York State Workers' Compensation Board Form No. DB-120.1 and (3) Request for WC/DB Exemption Form No. CE-200. The City will not accept an ACORD form as proof of Workers' Compensation or Disability Insurance.</p> <p>Jones Act and U.S. Longshoremen's and Harbor Workers' Compensation Act: Statutory per U.S. law.</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<input checked="" type="checkbox"/> Builders' Risk Art. 22.1.4	100 % of total value of Work Contractor the Named Insured; the City both an Additional Insured and one of the loss payees as its interests may appear. If the Work does not involve construction of a new building or gut renovation work, the Contractor may provide an installation floater in lieu of Builders Risk insurance. Note: Builders Risk Insurance may terminate upon Substantial Completion of the Work in its entirety.
<input checked="" type="checkbox"/> Commercial Auto Liability Art. 22.1.5	\$1,000,000.00 per accident combined single limit If vehicles are used for transporting hazardous materials, the Contractor shall provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90
<input type="checkbox"/> Contractor's Pollution Liability Art. 22.1.6	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Protection and Indemnity Art. 22.1.7(a)	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<input type="checkbox"/> Hull and Machinery Insurance Art. 22.1.7(b)	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Pollution Liability Art. 22.1.7(c)	\$ _____ each occurrence Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER] Art. 22.1.8 <input type="checkbox"/> Ship Repairers Legal Liability	\$ _____ each occurrence
[OTHER] Art. 22.1.8 <input type="checkbox"/> Collision Liability/Towers Liability	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER] Art. 22.1.8 <input type="checkbox"/> Railroad Protective Liability	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Asbestos Liability _____</p>	<p>Only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>\$1,000,000 each occurrence, \$2,000,000 aggregate (Combined Single Limit); only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____</p>
<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Boiler Insurance _____</p>	<p>\$200,000</p>
<p>[OTHER] Art. 22.1.8</p> <p>■ Professional Liability</p> <p>In the event any section of the Specifications requires the Contractor to engage a Professional Engineer to provide design and/or engineering services, the Engineer engaged by the Contractor, as well as any sub consultant(s) performing professional services, shall provide Professional Liability Insurance.</p>	<p>\$1,000,000 per occurrence</p> <p>The Contractor's Professional Engineer shall maintain and submit evidence of Professional Liability Insurance in the minimum amount of \$1,000,000 per claim. The policy or policies shall include an endorsement to cover the liability assumed by the Contractor under this Agreement arising out of the negligent performance of professional services or caused by an error, omission or negligent act of the Contractor's Professional Engineer or anyone employed by the Contractor's Professional Engineer.</p> <p>Claims-made policies will be accepted for Professional Liability Insurance. All such policies shall have an extended reporting period option or automatic coverage of not less than two (2) years. If available as an option, the Contractor's Professional Engineer shall purchase extended reporting period coverage effective on cancellation or termination of such insurance unless a new policy is secured with a retroactive date, including at least the last policy year.</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART III. Certificates of Insurance

All certificates of insurance (except certificates of insurance solely evidencing Workers' Compensation Insurance, Employer's Liability Insurance, and/or Disability Benefits Insurance) must be accompanied by one of the following:

- (1) the Certification by Insurance Broker or Agent on the following page setting forth the required information and signatures;

-- OR --

- (2) copies of all policies as certified by an authorized representative of the issuing insurance carrier that are referenced in such certificate of insurance. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART III. Certification by Insurance Broker or Agent

The undersigned insurance broker or agent represents to the City of New York that the attached Certificate of Insurance is accurate in all material respects.

[Name of broker or agent (typewritten)]

[Address of broker or agent (typewritten)]

[Email address of broker or agent (typewritten)]

[Phone number/Fax number of broker or agent (typewritten)]

[Signature of authorized official or broker or agent]

[Name and title of authorized official, broker or agent (typewritten)]

State of)
) ss:
County of)

Sworn to before me this
_____ day of _____, 20__

NOTARY PUBLIC FOR THE STATE OF _____

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART IV. Address of Commissioner

Wherever reference is made in Article 7 or Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth below or, in the absence of such address, to the **Commissioner's** address as provided elsewhere in this **Contract**.

ACCO's Office, Insurance Unit

30-30 Thomson Avenue, 4th Floor

Long Island City, New York 11101

SCHEDULE B

Guarantees and Warranties

(Reference: Section 01 7839, Article 2.7 of the DDC Standard General Conditions)

GUARANTY FROM CONTRACTOR

(1) **Contractor's Guaranty Obligation:** The Contractor shall promptly repair, replace, restore or rebuild, as the Commissioner may determine, any finished Work in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of Substantial Completion (or use and occupancy in accordance with the Contract), except for the areas of Work set forth below:

- Roofing, Waterproofing, and Joint Sealant Work. For these types of work, the guarantee period shall be (2) two years.
- Trees and/or Plant Material. For trees and/or plant material furnished and installed, the guarantee period shall be (2) two years. During the guarantee period, the Contractor shall provide all maintenance services set forth in the Specifications.

(2) **Guaranty Period:** The obligation of the Contractor, and its Surety under the Performance Bond, is limited to the period(s) of time specified above.

(3) **Other Provisions Deemed Deleted:** In the event the Specifications and/or the Contract Drawings contain any provisions regarding guaranty requirements, such provisions are deemed deleted and replaced with the guaranty requirements set forth in this Schedule B.

WARRANTY FROM MANUFACTURER

(1) **Contractor's Obligation to Provide Warranties:** The items of material and/or equipment for which manufacturer warranties are required are listed below. For each item of material and/or equipment listed below, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth below and will be replaced or repaired within such specified period. The Contractor shall deliver all required warranties to the Commissioner.

(2) **Required Warranties:**

Specification Number	Material or Equipment	Warranty Period
070150	Maintenance of Membrane Roofing	5 years
076200	Sheet Metal Flashing and Trim	2 years
230501	General Equipment, Workmanship, Material AHU Heating and Cooling Coils	1 year 5 years
236313	Condensing Unit	2 years (5 years compressor)
237313	Air Handling Unit	2 years
230923	Temperature Control System	1 year
232123	Hydronic Pumps	5 years

233400	Centrifugal Fans	2 years
238103	Packaged Rooftop Air Conditioning Units: Compressor	5 years
	Heat Exchanger	5 years
260501	Electrical equipment, workmanship and materials	1 year
265200	Emergency Lighting Unit	3 years
	Exit Signs	3 years
283101	Fire Detection and Fire Alarm	1 year

(3) **Application:** The obligations under the warranty for the periods specified above shall apply only to the manufacturer of the material or equipment, and not to the Contractor or its Surety; provided, however, the Contractor retains responsibility for obtaining all required warranties from the manufacturers and delivering the same to the Commissioner.

(4) **Other Provisions:** The warranty requirements set forth in this Schedule B are also included in the Specifications.

- (a) In the event of any conflict between a warranty requirement set forth in the Specifications and a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall take precedence.
- (b) In the event a warranty requirement set forth in the Specifications is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications, shall remain in full force and effect.
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from both Schedule B and the Specifications, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (d) In the event a warranty requirement is provided for a particular item of material or equipment, and such requirement specifies a warranty period that is longer than that which is actually provided by any of the specified manufacturers, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by any of the specified manufacturers, unless otherwise directed in writing by the Commissioner.
- (e) Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.

SCHEDULE C

Contract Drawings

(Reference: Section 01 1000, Article 1.5 (A) of the DDC Standard General Conditions)

The Schedule set forth below lists all Contract Drawings for the Project.

	<u>1. FRANCIS MARTIN BRANCH LIBRARY:</u>
T-001.00	TITLE SHEET
	<u>ARCHITECTURAL DRAWING:</u>
A-001.00	TYPICAL DETAILS
	<u>STRUCTURAL DRAWINGS:</u>
S-001.00	GENERAL NOTES, STRUCTURAL STEEL NOTES, LEGEND, AND ABBREVIATIONS.
S-002.00	DUNNAGE AND ACOUSTICAL BARRIER ROOF PLAN. DUNNAGE SECTIONS AND DETAILS.
S-003.00	ACOUSTICAL BARRIER SECTIONS AND DETAILS. CURB DETAILS.
	<u>MECHANICAL DRAWINGS:</u>
M-001.00	HVAC NOTES, LEGEND AND ABBREVIATIONS
DM-001.00	HVAC DEMOLITION BASEMENT AND FIRST FLOOR PLANS HVAC DEMOLITION
DM-002.00	SECOND FLOOR AND ROOF PLANS
M-002.00	HVAC BASEMENT AND FIRST FLOOR PLAN
M-003.00	HVAC SECOND FLOOR AND ROOF PLANS
M-004.00	HVAC DETAILS
M-005.00	HVAC DETAILS
M-006.00	HVAC CONTROL SCHEMATIC
M-007.00	HVAC EQUIPMENT SCHEDULES
EN-001.00	ECCCNYS COMPLIANCE
	<u>ELECTRICAL DRAWINGS:</u>
E-001.00	ELECTRICAL SYMBOL LIST
DE-001.00	POWER DEMOLITION FLOOR PLANS
DE-002.00	EMERGENCY LTG DEMOLITION FLOOR PLANS
E-002.00	POWER BASEMENT AND FIRST FLOOR PLANS
E-003.00	POWER SECOND FLOOR AND ROOF PLANS
E-004.00	POWER RISER DIAGRAMS
E-005.00	EMERGENCY LTG INSTALLATION FLOOR PLANS
	<u>FIRE ALARM DRAWINGS:</u>
FA-001.00	FIRE ALARM SYMBOL LIST
DF-001.00	FIRE ALARM DEMOLITION FLOOR PLANS
FA-002.00	FIRE ALARM INSTALLATION FLOOR PLANS
FA-003.00	FIRE ALARM RISER DIAGRAM
	<u>ASBESTOS ABATEMENT:</u>
H-001.00	ASBESTOS ABATEMENT GENERAL NOTES
H-002.00	ASBESTOS ABATEMENT MAIN FLOOR PLAN

2. CLASON'S POINT BRANCH LIBRARY:

T-004.00	TITLE SHEET
	<u>MECHANICAL DRAWINGS:</u>
M-001.00	HVAC NOTES, LEGEND AND ABBREVIATIONS
M-002.00	FIRST FLOOR PLAN EXIST. DUCTWORK
DM-003.00	HVAC DEMOLITION CELLAR FLOOR PLAN
M-004.00	HVAC CELLAR FLOOR PLAN
M-005.00	HVAC EQUIPMENT SCHEDULES
M-006.00	HVAC DETAILS
EN-001.00	ECCCNYS COMPLIANCE
	<u>ELECTRICAL DRAWINGS</u>
E-001.00	ELECTRICAL SYMBOLS, ABBREVIATIONS AND NOTES
E-002.00	ELECTRICAL CELLAR FLOOR PLAN (DEMOLITION AND INSTALLATION)
E-003.00	ELECTRICAL ONE LINE DIAGRAM

SCHEDULE D

Electrical Motor Control Equipment

(Reference: 01 3506, Article 3.8 of the DDC Standard General Conditions)

Requirements for electrical motor equipment may be included in one or more sections of the Specifications for the Contract for the Project. Schedule D set forth below delineates specific information for electrical motor control equipment. In the event of any conflict between the Specifications and this Schedule D, Schedule D shall take precedence; provided, however, in the event of an omission from Schedule D (i.e., Schedule D omits either a reference to or information concerning electrical motor equipment which is set forth in the Specifications), such omission from Schedule D shall have no effect and the Contractor's obligation with respect to the electrical motor control equipment, as set forth in the Specifications, shall remain in full force and effect.

DB Disconnect Circuit Breaker (Switch)	P Pilot Light	BG Break Glass Station
TS Thermal Switch	F Firestat	HOA Hand-Off Auto.
MS Magnetic Starter	T Thermostat	PB Push Button Station
CMS Comb. Mag. Starter	AL Alternator	RO Remote "off"

Francis Martin Branch Library

Equip. Ident.	Location	# of Units	HP or KW	Volts and Phase	Control Type: See legend above	Remarks:
RTU-2, 3, 4 & 5	ROOF	2	9.9KW	208V,3 Ph	DS	
AHU-1	BASEMENT	1	1.5HP	208V,3 Ph	DS	
CU-1	ROOF	1	300 KW	208V,3 Ph	DS	
CHU-1	1 ST FLOOR	1	220 WT	115V, 1 Ph	DB	
CHU-2	2 ND FLOOR	1	220 WT	115V, 1 Ph	DB	
RF-1	BASEMENT	1	1.5 HP	208V,1 Ph	CMS	

Clason's Point Branch Library

Equip. Ident.	Location	# of Units	HP or KW	Volts and Phase	Control Type: See legend above	Remarks:
AHU-1	CELLAR	1	7.5HP	208V,3 Ph	DS/VSD	
ACCU-1	ROOF	1	40HP	208V,3 Ph	DS	

P-2A	CELLAR	1	3/4HP	208V,1 Ph	CMS	
P-2B	CELLAR	1	3/4HP	208V,3 Ph	CMS	

SCHEDULE E**Separation of Trades**

NOT USED FOR SINGLE CONTRACTS

SCHEDULE F

Submittals Schedule

(Reference: Section 01 3300 Article 1.5 (C) of the General Conditions)

The Schedule set forth below lists all submittal requirements for the Contract. In the event of any conflict between the Specifications and this Schedule F, Schedule F shall take precedence; provided, however, in the event of an omission from Schedule F (i.e., Schedule F omits either a reference to or information concerning a submittal requirement which is set forth in the Specifications), such omission from Schedule F shall have no effect and the Contractor's submittal obligation, as set forth in the Specifications, shall remain in full force and effect.

CONSULTANT: _____ DATE: _____

TELEPHONE NUMBER: _____ APPROVED: _____

DDC PROJECT MANAGER: _____ (DDC RESIDENT ENGINEER/CPM)

TELEPHONE NUMBER: _____

REPORT DATE		FMS ID #/PROJECT ID #: CONTRACT REGISTRATION #: PROJECT NAME:			Contract 1 - GENERAL CONSTRUCTION											
SPEC. SECT. #	DESCRIPTION	COORD. WITH CONTR.	SUBMITTAL	SUB. DATE	REQ'D DEL.	FABRIC. TIME	SUBMISSIONS				SHOP DRAWING LOG SHEET #					
			SHOP DWG	SAMPLE	CAT CUTS		REC'D	RET'D	ACTION	REC'D	RET'D	ACTION	REC'D	RET'D	ACTION	
01 3526	Safety and Health Program	X														
01 3526	Contractor's Safety Plan	X														
01 3591	Historic Treatment Plan	X														
01 5000	Site Plan		X													
01 5000	Reports	X														
01 5423	NYC DOB Scaffold & Sidewalk Shed Permits	X	X													
01 5423	Site Logistics/Site Safety Plan	X														
01 5423	Scaffold & Shed Installation Drawings		X													
01 7419	Waste Management Plan	X														

TABLE OF CONTENTS

CONTRACT No.1 - GENERAL CONSTRUCTION

Section Title

DIVISION 02 - EXISTING CONDITIONS

02 41 19	Selective Removals & Demolition
02 80 13	Allowance for Incidental Asbestos (Clason's Point)
02 80 13	Allowance for Incidental Asbestos (Francis Martin)
02 82 13	Asbestos Abatement (Francis Martin)

DIVISION 03 - CONCRETE

03 30 00	Cast-In-Place Concrete
----------	------------------------

DIVISION 05 - METALS

05 12 00	Structural Steel
----------	------------------

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 01 50	Protection of Membrane Roofing
07 62 00	Sheet Metal Flashing and Trim
07 84 00	Firestopping/Smoke Seals
07 92 00	Joint Sealers

DIVISION 08 - OPENINGS

08 91 00	Stationary Metal Wall Louvers
----------	-------------------------------

DIVISION 09 - FINISHES

09 21 16	Gypsum Board Assemblies
09 91 23	Patching and Painting

DIVISION 13 SPECIAL CONSTRUCTION

13 48 13	Acoustical Panel Systems
----------	--------------------------

DIVISION 23 - HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)

23 05 01	Basic Heating, Ventilation and Air Conditioning Requirements
23 05 03	HVAC Piping
23 05 23	Valves (HVAC)
23 05 49	Vibration Isolation
23 05 53	HVAC Identification

NYPL - TWO (2) BRONX BRANCH LIBRARIES
REPLACEMENT OF HVAC AND BMS

23 05 93	Cleaning and Testing
23 05 94	Balancing of Systems
23 07 01	Piping Insulation (HVAC)
23 07 03	Ductwork Insulation
23 09 23	TCS with Web-Based Building
23 09 93	Sequence of Operation
23 20 03	Thermometers and Gages
23 21 16	Hydronic Specialties
23 21 23	Hydronic Pumps
23 31 13	Metal Ductwork
23 33 00	Ductwork Accessories
23 33 01	Access Doors
23 33 13	Dampers
23 34 00	Centrifugal Fans
23 37 00	Air Outlets and Inlets
23 63 13	Air Cooled Condensing Units
23 73 13	Air Handling Unit
23 81 03	Packaged Rooftop Air Conditioning Units
23 83 60	Cabinet Heaters

DIVISION 26 - ELECTRICAL

26 05 01	General Provisions for Electrical Work
26 05 22	Wiring Systems
26 05 29	Hangers and Supports for Electrical Systems
26 05 32	Electrical Identification
26 05 33	Raceways and Boxes for Electrical Systems
26 24 19	Motors, Starter and Control Equipment
26 27 26	Wiring Devices
26 28 12	Safety Switches
26 52 00	Emergency Lighting - Unit Equipment

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

28 31 01	Fire Detection and Alarm System
----------	---------------------------------

END OF TABLE OF CONTENTS

CONTRACT # 1
GENERAL CONSTRUCTION WORK

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 024119

SELECTIVE REMOVALS & DEMOLITION

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

A. Extent of Work

Removal and demolition of selected items from selected areas as indicated on the Drawings; items to be removed include, but are not limited to, the following:

1. Roof Top Units.
2. Air handler units.
3. Condensing units.
4. Return air fans.
5. Refrigerant and hot water piping.
6. Ductwork.
7. Louvers.
8. Pipe and duct insulation.
9. Hot water pumps.
10. Existing cable and conduit, junction and pull box(es), motor starters and switches, timers and etc.
11. Duct type smoke detectors.

1.02 SUSTAINABILITY REQUIREMENTS

A. The Contractor shall implement practices and procedures to meet the Project's sustainable requirements. The Contractor shall ensure that the requirements related to these goals, as specified in this Section, are implemented to the fullest extent.

B. Sustainability requirements included in the Section are as follows:

1. Refrigerant recovery requirements.
2. Demolition waste management.



3. Management of dust and particulate matter.

1.03 RESPONSIBILITY, PROTECTION, DAMAGES, RESTRICTIONS

A. Condition of Space

The Commissioner assume no responsibility for actual condition of the space in which removals and demolition Work is performed.

B. Protections

Provide temporary barricades and other forms of protection required to protect City of New York property, personnel, and general public from injury due to selective removals and demolition work.

1. Provide protective measures as required to provide free and safe passage of personnel, and the general public.
2. Protect from damage existing finish work that is to remain in place and which becomes exposed during operations.
3. Protect floors with building paper or other suitable covering.

C. Damages

Promptly repair any and all damages to all property and finishes caused by the removals and demolition work; to the City of New York satisfaction and at no extra cost to the City of New York.

D. Explosives

The use of explosives is prohibited.

E. Power-driven Tools (for interior removals and demolition).

Only hand-held electric power-driven tools conforming to the following criteria shall be used to cut or drill masonry:

1. Electric Chiselling Hammer
 - a. Power Data 115 Volts AC
7-8 Amps



- Three-wire grounded connection
- b. Percussion 2400-2600 Impacts/Minute
- c. Type/Size Hand-held (+ 18-inch length)
- d. Unit Weight 12-15 pounds (minus chisel bit)
- 2. Electric Hammer Drill
 - a. Power Data 115 Volts AC
5-8 Amps
Three-wire grounded connection
 - b. Percussion 2400-3200 Impacts/Minute
 - c. Type/Size Hand-held (+ 18-inch length)
 - d. Unit Weight 12-15 pounds (minus chisel bit)
 - e. Speed Data 0-0500 RPM (Under load)

1.04 QUALITY ASSURANCE

A. Qualifications

- 1. Company specializing in performing the Work of this Section shall have a minimum of 3 years experience and shall have worked on projects of similar size.
- 2. Refrigerant Recovery Technician Qualifications: Certified by EPA 608 Technician Certification, required by Section 608 of the Federal Clean Air Act.

B. Regulatory Requirements

- 1. Work of this Section shall conform to all requirements of the NYC Building Code and all applicable regulations and guidelines of all governmental authorities having jurisdiction, including, but not limited to, safety, health, and anti-pollution regulations. Where more stringent requirements than those contained in the Building Code or other applicable regulations are given in this Section, the requirements of this Section shall govern.

PART 2 - PRODUCTS - NOT APPLICABLE



PART 3 - EXECUTION

3.01 INSPECTION

- A. Prior to commencement of the selective removals and demolition Work, inspect the areas in which the Work will be performed. Determine and list the existing conditions of rooms or area surfaces and equipment. After the Work in each respective area is completed, determine if adjacent surfaces or equipment have been damaged as a result of the Work; if so, the damage shall be corrected at the Contractor's expense.

3.02 REMOVALS AND DEMOLITION WORK

- A. Perform selective demolition Work in a systematic manner and use such methods as are required to complete the Work indicated, and in accordance with the Specifications and governing City, State, and Federal regulations.
- B. When suspended ceiling (or portions thereof) are indicated to be removed; unless indicated otherwise:
1. Remove all items attached to the surfaces of the ceiling to be removed.

3.03 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove debris, rubbish and other materials resulting from the removals and demolitions from the building immediately; transport and legally dispose of materials off-site. Disposal method shall be in accordance with City, State, and Federal regulations.
- B. Burning of removed materials is not permitted on the job site.

3.04 CLEAN-UP AND REPAIR

- A. Upon completion of removals and demolition Work, remove tools, equipment and all remaining demolished materials from the site.
- B. Repair all damaged areas caused by the removals and demolition Work. Repair adjacent construction or surfaces soiled or damaged by selective demolition work.
- C. All areas in which Work was performed under this Section shall be left "broom-clean."

3.05 OWNERSHIP OF MATERIALS



- A. All equipment, materials, and items removed shall remain the property of the City of New York, if desired; equipment, material and items not desired to be re-used or retained by the City of New York shall be removed from the site by the Contractor. The Commissioner will designate which equipment, materials and items will be retained.

END OF SECTION 024119

THIS PAGE LEFT INTENTIONALLY BLANK



SECTION 028013 – GENERAL CONTRACTOR WORK
OCTOBER 2017 VERSION

ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

1.01 SCOPE FOR ASBESTOS ABATEMENT WORK

- A. The "General Conditions" apply to the work of this Section.
- B. The asbestos abatement contractor shall remove asbestos containing materials as needed to perform the other work of this Contract when discovered during the course of work. When required, the asbestos abatement contractor shall replace the ACM with non-asbestos containing materials. An allowance of **\$30,000.00** for the **General Contractor** is herein established for this incidental work when so ordered and authorized by the Commissioner.
- C. All work shall be done in accordance with the applicable provisions of the rules and regulations of the asbestos control program as promulgated by Title 15 Chapter I of RCNY and New York State Department of Labor Industrial Code Rule 56 cited as 12 NYCRR Part 56, whichever is more stringent as per latest amendments to these laws and as modified herein by these specifications.
- D. All disposal of asbestos contaminated material shall be per Local Law 70/85.
- E. The asbestos abatement contractor's attention is directed to the fact that certain methods of asbestos abatement are protected by patents. To date, patents have been issued with respect to "negative pressure enclosure" or "negative-air" or "reduced pressure" and "glove bag".
- F. The asbestos abatement contractor shall be solely responsible for and shall hold the department of design and construction and the city harmless from any and all damages, losses and expenses resulting from any infringement by the asbestos abatement contractor of any patent, including but not limited to the patents described above, used by the asbestos abatement contractor during performance of this agreement.
- G. "Asbestos" shall mean any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite (cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthrophyllite and actinolite.
- H. Prior to starting, the asbestos abatement contractor must notify the Commissioner of the Department of Design and Construction if he/she anticipates any difficulty in performing the Work as required by these Specifications. The asbestos



abatement contractor is responsible to prepare and submit all filings, notifications, etc. required by all City, State and Federal regulatory agencies having jurisdiction.

The asbestos abatement contractor is responsible for submitting the Asbestos Project Notification Form (ACP-7 Form) to the Department of Environmental Protection, Asbestos Control Program, as per Title 15, Chapter I of RCNY and to the NYSDOL as per Industrial Code Rule 56.

The asbestos abatement contractor is responsible for preparing, and submitting Asbestos Variance Application (ACP-9). If a Variance is required, the asbestos abatement contractor is responsible to retain a NYSDOL Asbestos Project Designer, as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required variance.

The general contractor is responsible for preparing and submitting an Asbestos Abatement Permit and/or Work Place Safety Plans (WPSP) that may be required for the completion of the Contract or incidental work. If such plans are required, the general contractor is responsible for retaining a registered design professional as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required plans.

The asbestos abatement contractor is responsible for the submission of all required documents to the NYCDEP to acquire the appropriate Asbestos Project Conditional Closeout (ACP-20) and/or Asbestos Project Completion Forms (ACP-21) on a timely basis for the completion of the incidental work encountered under this contract.

The asbestos abatement contractor will be required to attend an on-site job meeting with the Construction Project Manager prior to the start of work to examine conditions and plan the sequence of operations, etc.

The asbestos abatement contractor shall have a NYSDOL/NYCDEP Asbestos Supervisor onsite to oversee the work and conduct a final visual inspection as required by both Title 15, Chapter 1 of the RCNY and NYSDOL Industrial Code Rule 56.

- I. All work shall be done during regular working hours unless the asbestos abatement contractor requests authorization to work in other than regular working hours and such authorization is granted by the Commissioner. (Regular work hours are those hours during which any given facility, in which work is to be done, is customarily open and functioning, normally between the hours of 8:00 A.M. and 4:00 P.M. Monday - Friday.) If such work schedule is authorized by the Commissioner, the work shall be done at no additional cost to the City.



- J. The Commissioner may order that work be done in other than regular working hours as herein by defined and this order may require the asbestos abatement contractor to pay premium or overtime wages to complete the work. If the Commissioner orders work in other than regular working hours, the asbestos abatement contractor shall multiply the unit price for that portion of the work requiring premium wages by 1.50 when computing payment in accordance with Paragraph 1.09. All requests for premium payment must be supported by certified payroll sheets and field sheets approved by the Construction Project Manager.

1.02 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must be approved through the Department's Request for Subcontractor Approval, administered by the Agency Chief Contracting Office (ACCO), Vendor Integrity Unit, The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (6) below. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, demonstrate for the three year period prior to the work that it has been licensed by the New York State Department of Labor (NYSDOL), as an "Asbestos Abatement Contractor". The asbestos abatement contractor shall submit copies of the asbestos abatement contractors NYSDOL License for the past three years
 2. The asbestos abatement contractor must, for the three-year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 - a. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must submit a list of five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$1,000,000 in each of the three years.
 - b. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following information for the project; name and location of the project; name title and telephone number and email address of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work; brief description of the scope of work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.



- c. The asbestos abatement contractor must demonstrate that it has the financial resources, certified supervisory personnel and equipment necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract. The Department may also conduct an inspection of the asbestos abatement contractor's facility to verify if the contractor has equipment and staffing to perform the work.
 - d. The asbestos abatement contractor must submit a copy of their Corporate Health and Safety Plan for review and acceptance. A Job Hazard Analysis (JHA) for the specific work conducted must be included.
- B. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof. Provide materials or workmanship that meet or exceed the specifically named codes or standards where required by these specifications.
- C. Site Investigation: Asbestos abatement contractor shall inspect all the specifications and related drawings, and will investigate and confirm the site conditions affecting the work, including, but not limited to (1) through (5) below. The asbestos abatement contractor will attend a walkthrough site inspection with the department's Project Manager and the Third-Party Air Monitor prior to the work. Such walkthrough will be scheduled at the Department's convenience.
1. Physical considerations and conditions of both the material and structure. These considerations include any obstacles or obstructions encountered in accessing or removing the material.
 2. Handling, storage, transportation and disposal of the material.
 3. Availability of qualified and skilled labor.
 4. Availability of utilities.
 5. Exact quantities of all materials to be disturbed and/or removed

1.03 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

The asbestos abatement contractor will visit the subject location within one (1) working day of notification to ascertain actual work required. If the project is identified as being



"urgent", then work shall commence no later than 48 hours from the time of notification. In this event, the asbestos abatement contractor shall immediately notify when applicable EPA NESHAPS Coordinator, NYSDOL Asbestos Control Bureau and NYCDEP Asbestos Control Program of start of the work and file the necessary Asbestos Notifications and any applicable Variance Applications with the regulatory agencies cited above.

In the event that the project is not classified as "urgent" the asbestos abatement contractor shall notify the EPA NESHAPS Coordinator, NYSDOL and NYCDEP by submitting the requisite asbestos project notification forms, postmarked 10 days before activity begins if 260 linear feet or more and/or 160 square feet or more of asbestos containing material will be disturbed.

The following information must be included in the notification:

- A. Name and address of building City or operator;
- B. Project description:
 - 1. Size - square feet, number of linear feet, etc;
 - 2. Age - date of construction and renovations (if known);
 - 3. Use - i.e., office, school, industrial, etc.
 - 4. Scope - repair, demolition, cleaning, etc.
- C. Amount of asbestos involved in work and an explanation of techniques used to determine the amount;
- D. Building location/address, including Block and Lot numbers;
- E. Work schedule including the starting and completion dates;
- F. Abatement methods to be employed;
- G. Procedures for removal of asbestos-containing material;
- H. Name, title and authority of governmental representative sponsoring project.

1.04 WORK INCLUDED IN UNIT PRICE

The asbestos abatement contractor will be paid a basic unit price of **\$25.00** per square feet for the removal and disposal of asbestos containing material and replacement of the same with non-asbestos containing materials.



Unit price shall include all costs necessary to do the work of this Contract, including but not limited to: labor, materials, equipment, utilities, disposal, insurance, overhead and profit.

1.05 AIR MONITORING – ASBESTOS ABATEMENT CONTRACTOR

- A. “Air Sampling” shall mean the process of measuring the fiber content of a known volume of air collected during a specific period of time. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400 or the provisional transmission electron microscopy methods developed by the USEPA and/or National Institute of Standard and Technology which are utilized for lower detectability and specific fiber identification.
- B. Air monitoring of asbestos abatement contractor’s personnel will be performed in conformance with OSHA requirements, (All costs associated with this work are deemed included in the unit price.).
- C. Qualifications of Testing Laboratory:

The industrial hygiene laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory identification number shall be submitted and approved by the City. The laboratory shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).

Note: Work area air testing and analysis before, during and upon completion of work (clearance testing) will be performed by a Third Party Air Monitor under separate Contract with the City.

1.06 THIRD PARTY MONITORING AND LABORATORY

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM).
- C. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.



- D. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the asbestos abatement contractor.

1.07 PAYMENT REQUEST DOCUMENTATION

- B. The following information shall be included for each payment request:
1. Description of work performed.
 2. Linear footage and pipe sizes involved.
 3. Square footage for boiler & breaching insulation removed.
 4. Square footage of non pipe and boiler areas removed, patched, enclosed, sealed, or painted.
 5. Square footage of encapsulation, sealing, patching, and painting involved.
 6. Total cost associated with compliance with the assigned task.
 7. Architectural, Electrical, HVAC, Plumbing, etc. work incidental to the Asbestos Abatement Work.
 8. A certified copy (in form 4312-39) to the Comptroller or Financial Officer of the New York City to the effect that the financial statement is true.
 9. A signed copy (in form 6506q-6) of certificate of compliance with non-discriminatory provisions of the Contract.
 10. Attach a copy of valid workmen compensation insurance.
 11. Valid asbestos insurance per occurrence.
 12. General liability insurance when required.
- C. Each payment request shall include a grand total for all work completed that billing period, the landfill waste manifests and a copy of waste transporter permit. The Department of Design and Construction will inspect the work performed, review the cost and approve or disapprove requests for payment.
- D. EXPOSURE LOG: With this final payment, the asbestos abatement contractor shall submit a listing of the names and social security numbers of all employees actively engaged in the abatement work of this Contract. This list shall include a



summary showing each part of the abatement work in which the employee was engaged and the dates thereof.

1.08 QUANTITY CALCULATIONS

In order to determine the square footage involved for the various pipe sizes of pipe insulation that might be encountered, the following table is to be used.

<u>PIPE INSULATION SIZE O.D.</u>	<u>PIPE SIZE O.D.</u>	<u>SQUARE FOOTAGE PER LINEAR FOOT</u>
2-1/2"	1/2"	0.65
2-3/4"	3/4"	0.72
3"	1"	0.79
3-1/4"	1-1/4"	0.85
3-1/2"	1-1/2"	0.92
4"	2"	1.05
4-1/2"	2-1/2"	1.18
5"	3"	1.31
6"	3-1/4"	1.57
7"	3-1/2"	1.83
8"	4"	2.09
9"	5"	2.36
10"	6"	2.62
12"	8"	3.14
14"	10"	3.67
16"	12"	4.19
18"	14"	4.71

1.09 METHOD OF PAYMENT

Payment shall be made in accordance with Items A through R below. Payment shall be calculated based on the actual quantity of the item performed by the asbestos abatement contractor, times the unit price specified below. Credits may apply to certain times, as specified below.

- A. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING PIPE INSULATION:** Actual linear footage, multiplied by the square footage factor listed for the respective pipe size in Section 1.08, multiplied by the unit price in Section 1.04.

EXAMPLE: 100 lin.ft. of 1/2" pipe and 100 lin.ft. of 6" pipe, including elbows, tees. Flanges, etc.

100 X 0.65 = 65 sq.ft. 65 x unit price = Payment



$$100 \times 2.62 = 262 \text{ sq.ft.} \quad 262 \times \text{unit price} = \text{Payment}$$

- B. **REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER INSULATION:** (all types including Silicate Block and including the removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.

EXAMPLE: Item B. removal and replacement of 1000 S.F. of boiler insulation (incl. Silicate block)

$$1000 \text{ S.F.} \times (1.5) \times \text{the Unit Price} = \text{Payment}$$

- C. **REMOVAL, DISPOSAL AND REPLACEMENT OF TANK INSULATION:** (all types including removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.
- D. **REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER UPTAKE, & BREACHING INSULATION:** (all types including stiffening angles and wire lath) Payment shall be made at 2.0 times the unit price per square foot.
- E. **REMOVAL, DISPOSAL AND REPLACEMENT OF DUCT INSULATION:** Payment shall be made at 1.0 times the unit price per square foot.
- F. **REMOVAL, DISPOSAL AND REPLACEMENT OF SOFT ASBESTOS CONTAINING MATERIAL:** (Including sprayed-on fire proofing and sound proofing) Payment shall be made at 1.0 times the unit price per square foot of surface area. Area of irregular surfaces must be calculated and confirmed with DDC representative.
- G. **ACOUSTIC PLASTER REPAIR AND/OR ENCAPSULATION:** Payment shall be made at 0.5 times the unit price per square foot.
- H. **PATCHING OR REPAIR** of items listed in A through F will be paid at 0.33 times the unit price per square foot.
- I. **REMOVAL, DISPOSAL AND REPLACEMENT OF WATERPROOFING ASBESTOS CONTAINING MATERIAL:** (including friable and non-friable waterproofing material from interior and exterior walls, floors, foundations, penetrations, louvers, vents and openings other than windows, doors and skylights) Payment shall be made at 0.5 times the unit price per square foot.
- J. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING ELECTRICAL WIRING INSULATION:** (including friable and non-friable wiring insulation) Payment shall be made at 0.33 times the unit price per square foot.
- K. **PAINTING:** Payment shall be made at 0.05 times the unit price per square foot.



- L. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING PLASTER:** from ceilings and walls, including any wire lath and disposal as asbestos containing waste. Payment shall be made at 0.80 times the unit price per square foot.
- M. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING FLOOR TILES, CEILING TILES, TRANSITE PANELS:** (including any adhesive, glue, mastic and/or underlayment) and disposal as asbestos containing waste. Payment shall be made at 0.40 times the unit price per square foot. If multiple layers are discovered, each additional layer shall be paid at 0.20 times the unit price per square foot.
- N. **ADDITIONAL CLEAN UP/HOUSEKEEPING OF WORK AREA:** (excluding pre-cleaning of work area required by regulations) HEPA vacuuming and wet cleaning of asbestos contaminated surface. Payment shall be made at 0.20 times the unit price per square foot. When GLOVE BAG is employed to remove ACM, cost of HEPA vacuuming and wet cleaning of floor area up to 3 feet on each side of glove-bag shall be included in unit price and no extra payment will be made.
- O. **REMOVAL, DISPOSAL OF ASBESTOS-CONTAINING ROOFING MATERIAL:** including mastic, flashing and sealant compound and provide temporary asbestos-free roof covering consisting of one layer of rolled roofing paper sealed with asphaltic roofing compound. Payment shall be made at 0.8 times the unit price per square foot. Credit at a rate of 0.33 times the unit price will be taken for each square foot of temporary roof covering which the asbestos abatement contractor is directed not to install.
- P. **PICK-UP AND DISPOSAL OF GROSS DEBRIS:** (excluding any waste generated from abatement under Item A-R) at a rate of \$150 per cubic yard for asbestos contaminated waste and \$75 per cubic yard for non-asbestos contaminated waste. This cost includes all labor and material cost associated with work.
- Q. **REMOVAL OF ASBESTOS-CONTAINING BRICK, BLOCK, MORTAR, CEMENT OR CONCRETE:** along with all surfacing materials including wire lath and/or other supporting structures and disposal as ACM waste. Payment shall be made at a rate of \$25.00 per cubic foot of material removed.
- R. **REMOVAL AND DISPOSAL OF ASBESTOS CONTAINING WINDOW/DOOR CAULKING:** including friable and non-friable caulking, weather-stripping, glazing, sealants or other waterproofing materials applied to windows, doors, skylights, etc. Payment shall be made at the rate of \$400.00 per opening regardless of size or configuration. This cost includes labor, consumable materials, set-up/breakdown, removal and disposal, as required.



Note 1: CREDIT: For items listed in A through F, a credit at a rate of 0.33 times the unit price, times the respective multiplier (for each item) will be taken for each square foot of insulation which the asbestos abatement contractor is not directed to reapply.

Note 2: MINIMUM PAYMENT: The minimum payment per call at any individual job sites or various job sites during the same day will be eight hundred dollars (\$800.00).

Note 3: All payments shall be made as described in paragraph 1.09 herein.

Note 4: WORKING HIGHER THAN 12 FEET ABOVE FLOOR LEVEL OR WORK REQUIRING COMPLEX SCAFFOLDING OR CONSTRUCTION WORK PLATFORMS: Provisions are made in this Contract to compensate the asbestos abatement contractor for work performed in locations that are difficult to access due to work at elevations that are significantly higher than the normal work level. The unit price for these items will be paid at 1.20 times the unit price described in Paragraphs 1.09, A through R for those portions of the work that are more than twelve (12) feet above the grade for that would be judged as the normal working level.

1.10 GUARANTEE

- A. Work performed in compliance with each task shall be guaranteed for a period of one year from the date the completed work is accepted by the Department of Design and Construction.
- B. The Commissioner of The Department of Design and Construction will notify the asbestos abatement contractor in writing regarding defects in work under the guarantee.

1.11 OCCUPANCY OF SITE NOT EXCLUSIVE

Attention is specifically drawn to the fact that contractors, performing the work of other Contracts, may be brought upon any of the work sites of this Contract. Therefore, the asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other contractors who may be brought upon any site of the work of this Contract. This paragraph applies to those areas outside the regulated Work Area as defined by Title 15, Chapter I of RCNY.

1.12 SUBMITTALS

- A. Pre-Construction Submittals:
 - 1. Attend a pre-construction meeting scheduled by the City of New York Department of Design and Construction. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project



Manager. At this meeting, the asbestos abatement contractor shall present three copies of the following items:

- a. asbestos abatement contractor's scope of work, work plan and schedule.
- b. Asbestos project notifications, approved variances and plans to Government Agencies.
- c. Copies of Permits, clearance and licenses if required.
- d. Schedules: the asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. asbestos abatement contractor shall post a copy of all schedules at the site:
 - (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.
 - (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.
- e. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number to nearest hospital) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.
- f. Safety Data Sheets (SDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until SDS are reviewed.



- g. Worker Training and Medical Surveillance: The asbestos abatement contractor shall submit a list of the persons who will be employed by him /her to perform the removal work. Present evidence that workers have received proper training required by the regulations and the medical examinations required by OSHA 29 CFR 1926.1101.
 - h. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
 - (1) The asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain on title page the project name, name, address and phone number of the asbestos abatement contractor; name, address and phone number of asbestos abatement contractor and City's third party air monitoring firm; emergency numbers including, but not limited to local Fire/Rescue Department. Log book shall contain a list of personnel approved for entry into the Work Area.
 - (2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the asbestos abatement contractor shall submit the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.
 - i. Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.
- B. During Construction Submittals:
- 1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.



2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
3. Floor plans indicating asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager.
4. All asbestos abatement contractors' air monitoring and inspection results.

C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from asbestos abatement contractor, sub-asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,
3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.
8. Project Record: The asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall be submitted to DDC as part of the close out documents. The project record shall consist of:



- a. Copies of licenses of all asbestos abatement contractors involved in the project;
- b. Copies of NYCDEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
- c. Copies of all project notifications and reports filed with NYCDEP, NYSDOL and USEPA for the project, with any amendments or variances;
- d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
- e. A copy of the air sampling log and all air sampling results;
- f. A copy of the abatement asbestos abatement contractor's daily log book;
- g. Copies of all asbestos waste manifests;
- h. A copy of all Project Monitor's Reports (ACP-15).
- i. A copy of each ATR-1 Form completed for the asbestos project (if required).
- j. A copy of each Asbestos Project Conditional Closeout Report (ACP-20) if required.
- k. A copy of the Asbestos Project Completion Form (ACP-21).

1.13 PROTECTION OF FURNITURE AND EQUIPMENT

Cover all furniture and equipment that cannot be removed from Work Areas. Movable furniture and equipment will be removed from Work Areas by the asbestos abatement contractor prior to start of work. At the conclusion of the work (after final air testing), the asbestos abatement contractor will remove all plastic covering on walls, floors, furniture, equipment and reinstall furniture and equipment. He shall remove and store all sheaths, curtains and drapes, and reinstall same following final clean up.

1.14 UTILITIES

A. General:

All temporary facilities shall be subject to the approval of the Commissioner. Prior to starting work at any site, locations and/or sketches (if required) of



temporary facilities must be submitted to the Construction Project Manager for the required approval.

B. Water:

The Department of Design and Construction will furnish all water needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. However, it is the responsibility of the asbestos abatement contractor to ensure that hot water is provided for showering in the decontamination unit. The asbestos abatement contractor shall furnish, install and maintain any needed equipment to meet these requirements at his own expense.

C. Electricity:

The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the asbestos abatement contractor in a building, under their jurisdiction. The asbestos abatement contractor is responsible for routing the electric power to the abatement Work Area.

All temporary lighting and temporary electrical service for Work Area shall be in weatherproof enclosures and be ground fault protected.

D. In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the asbestos abatement contractor. However, it is the asbestos abatement contractor's (or the general contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

1.15 FEES

The asbestos abatement contractor shall be responsible for any and all fees or charges imposed by Local, State or Federal Law, Rule and Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the date of the Bid opening.

END OF SECTION



SECTION 028013 – GENERAL CONTRACTOR WORK

ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

1.01 SCOPE FOR ASBESTOS ABATEMENT WORK

- A. The "General Conditions" apply to the work of this Section.
- B. The Asbestos abatement contractor shall remove asbestos containing materials as needed to perform the other work of this Contract when discovered during the course of work. When required, the Asbestos abatement contractor shall replace the ACM with non-asbestos containing materials. An allowance of **\$30,000.00** for the **General Contractor** is herein established for this incidental work when so ordered and authorized by the Commissioner.
- C. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF THE RULES AND REGULATIONS OF THE ASBESTOS CONTROL PROGRAM AS PROMULGATED BY TITLE 15 CHAPTER 1 OF RCNY AND NEW YORK STATE DEPARTMENT OF LABOR INDUSTRIAL CODE RULE 56 CITED AS 12 NYCRR, PART 56 WHICHEVER IS MORE STRINGENT AS PER LATEST AMENDMENTS TO THESE LAWS AND AS MODIFIED HEREIN BY THESE SPECIFICATIONS.
- D. ALL DISPOSAL OF ASBESTOS CONTAMINATED MATERIAL SHALL BE PER LOCAL LAW 70/85.
- E. THE ASBESTOS ABATEMENT CONTRACTOR'S ATTENTION IS DIRECTED TO THE FACT THAT CERTAIN METHODS OF ASBESTOS ABATEMENT ARE PROTECTED BY PATENTS. TO DATE, PATENTS HAVE BEEN ISSUED WITH RESPECT TO "NEGATIVE PRESSURE ENCLOSURE" OR "NEGATIVE-AIR" OR "REDUCED PRESSURE" AND "GLOVE BAG".
- F. THE ASBESTOS ABATEMENT CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR AND SHALL HOLD THE DEPARTMENT OF DESIGN AND CONSTRUCTION AND THE CITY HARMLESS FROM ANY AND ALL DAMAGES, LOSSES AND EXPENSES RESULTING FROM ANY INFRINGEMENT BY THE ASBESTOS ABATEMENT CONTRACTOR OF ANY PATENT, INCLUDING BUT NOT LIMITED TO THE PATENTS DESCRIBED ABOVE, USED BY THE ASBESTOS ABATEMENT CONTRACTOR DURING PERFORMANCE OF THIS AGREEMENT.
- G. "Asbestos" shall mean any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite



(cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthrophyllite and actinolite.

- H. Prior to starting, the Asbestos abatement contractor must notify the Commissioner of the Department of Design and Construction if he/she anticipates any difficulty in performing the Work as required by these Specifications. The Asbestos abatement contractor is responsible to prepare and submit all filings, notifications, etc. required by all City, State and Federal regulatory agencies having jurisdiction.

The Asbestos abatement contractor is responsible for submitting the Asbestos Project Notification Form (ACP-7 Form) to the Department of Environmental Protection, Asbestos Control Program, as per Title 15, Chapter I of RCNY and to the NYSDOL as per Industrial Code Rule 56.

The Asbestos abatement contractor is responsible for preparing, and submitting Asbestos Variance Application (ACP-9). If a Variance is required, the Asbestos abatement contractor is responsible to retain a NYSDOL Asbestos Project Designer, as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required variance.

The General contractor is responsible for preparing and submitting an Asbestos Abatement Permit and/or Work Place Safety Plans (WSP) that may be required for the completion of the Contract or incidental work. If such plans are required, the Asbestos abatement contractor is responsible to retain a NYSDOL Licensed Design Professional as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required plans.

The Asbestos abatement contractor is responsible for the submission of all required documents to the NYCDEP to acquire the appropriate Asbestos Project Conditional Closeout (ACP-20) and/or Asbestos Project Completion Forms (ACP-21) on a timely basis for the completion of the incidental work encountered under this contract.

The Asbestos abatement contractor will be required to attend an on-site job meeting with the Construction Project Manager prior to the start of work to examine conditions and plan the sequence of operations, etc.

The Asbestos abatement contractor shall have a NYSDOL/NYCDEP Asbestos Supervisor onsite to oversee the work and conduct a final visual inspection as required by both Title 15, Chapter 1 of the RCNY and NYSDOL Industrial Code Rule 56.

- I. All work shall be done during regular working hours unless the Asbestos abatement contractor requests authorization to work in other than regular working hours and such authorization is granted by the Commissioner. (Regular work hours are those hours during which any given facility, in which work is to be done, is customarily open and functioning, normally between the hours of 8:00



A.M. and 4:00 P.M. Monday - Friday.) If such work schedule is authorized by the Commissioner, the work shall be done at no additional cost to the City.

- J. The Commissioner may order that work be done in other than regular working hours as herein by defined and this order may require the Asbestos abatement contractor to pay premium or overtime wages to complete the work. If the Commissioner orders work in other than regular working hours, the Asbestos abatement contractor shall multiply the unit price for that portion of the work requiring premium wages by 1.50 when computing payment in accordance with Paragraph 1.09. All requests for premium payment must be supported by certified payroll sheets and field sheets approved by the Construction Project Manager.

1.02 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (5) below. The asbestos abatement contractor must, submit documentation demonstrating compliance with all listed requirements. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, must demonstrate for the three year period prior to the work, that it has been licensed by the New York State Department of Labor, as an "Asbestos abatement contractor".
 2. The asbestos abatement contractor must, for the three year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 3. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must provide evidence of having successfully performed and completed in a timely fashion at least five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$250,000.00 in each of the three years.
 4. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following information for the project; name and location of the project; name title and telephone number of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work, brief description of the work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.



5. The asbestos abatement contractor must demonstrate that it has the financial resources, supervisory personnel and equipment necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract.

- B. Insurance Requirements: The asbestos abatement contractor must provide asbestos liability insurance in the following amount: 1 million dollars per occurrence, 2 million dollars aggregate (combined single limit). The City of New York shall be named as an additional insured on such insurance policy.

- C. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof.

1.03 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

The Asbestos abatement contractor will visit the subject location within one (1) working day of notification to ascertain actual work required. If the project is identified as being "urgent", then work shall commence no later than 48 hours from the time of notification. In this event, the asbestos abatement contractor shall immediately notify when applicable EPA NESHAPS Coordinator, NYSDOL Asbestos Control Bureau and NYCDEP Asbestos Control Program of start of the work and file the necessary Asbestos Notifications and any applicable Variance Applications with the regulatory agencies cited above.

In the event that the project is not classified as "urgent" the Asbestos abatement contractor shall notify the EPA NESHAPS Coordinator, NYSDOL and NYCDEP by submitting the requisite asbestos project notification forms, postmarked 10 days before activity begins if 260 linear feet or more and/or 160 square feet or more of asbestos containing material will be disturbed.

The following information must be included in the notification:

- A. Name and address of building City or operator;

- B. Project description:
 1. Size - square feet, number of linear feet, etc;
 2. Age - date of construction and renovations (if known);
 3. Use - i.e., office, school, industrial, etc.
 4. Scope - repair, demolition, cleaning, etc.



- C. Amount of asbestos involved in work and an explanation of techniques used to determine the amount;
- D. Building location/address, including Block and Lot numbers;
- E. Work schedule including the starting and completion dates;
- F. Abatement methods to be employed;
- G. Procedures for removal of asbestos-containing material;
- H. Name, title and authority of governmental representative sponsoring project.

1.04 WORK INCLUDED IN UNIT PRICE

The Asbestos abatement contractor will be paid a basic unit price of **\$25.00** per square feet for the removal and disposal of asbestos containing material and replacement of the same with non-asbestos containing materials.

Unit price shall include all costs necessary to do the work of this Contract, including but not limited to: labor, materials, equipment, utilities, disposal, insurance, overhead and profit.

1.05 AIR MONITORING – ASBESTOS ABATEMENT CONTRACTOR

- A. "Air Sampling" shall mean the process of measuring the fiber content of a known volume of air collected during a specific period of time. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400 or the provisional transmission electron microscopy methods developed by the USEPA and/or National Institute of Standard and Technology which are utilized for lower detectability and specific fiber identification.
- B. Air monitoring of Asbestos abatement contractor's personnel will be performed in conformance with OSHA requirements, (All costs associated with this work are deemed included in the unit price.).
- C. Qualifications of Testing Laboratory:

The industrial hygiene laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory identification number shall be submitted and approved by the City. The laboratory shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).

Note: Work area air testing and analysis before, during and upon completion of work (clearance testing) will be performed by a Third Party Air Monitor under separate Contract with the City.



1.06 THIRD PARTY MONITORING AND LABORATORY

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM).
- C. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the Asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.
- D. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the Asbestos abatement contractor.

1.07 PAYMENT REQUEST DOCUMENTATION

- B. The following information shall be included for each payment request:
 - 1. Description of work performed.
 - 2. Linear footage and pipe sizes involved.
 - 3. Square footage for boiler & breaching insulation removed.
 - 4. Square footage of non pipe and boiler areas removed, patched, enclosed, sealed, or painted.
 - 5. Square footage of encapsulation, sealing, patching, and painting involved.
 - 6. Total cost associated with compliance with the assigned task.
 - 7. Architectural, Electrical, HVAC, Plumbing, etc. work incidental to the Asbestos Abatement Work.
 - 8. A certified copy (in form 4312-39) to the Comptroller or Financial Officer of the New York City to the effect that the financial statement is true.
 - 9. A signed copy (in form 6506q-6) of certificate of compliance with non-discriminatory provisions of the Contract.



10. Attach a copy of valid workmen compensation insurance.
 11. Valid asbestos insurance per occurrence.
 12. General liability insurance when required.
- C. Each payment request shall include a grand total for all work completed that billing period, the landfill waste manifests and a copy of waste transporter permit. The Department of Design and Construction will inspect the work performed, review the cost and approve or disapprove requests for payment.
- D. EXPOSURE LOG: With this final payment, the Asbestos abatement contractor shall submit a listing of the names and social security numbers of all employees actively engaged in the abatement work of this Contract. This list shall include a summary showing each part of the abatement work in which the employee was engaged and the dates thereof.

1.08 QUANTITY CALCULATIONS

In order to determine the square footage involved for the various pipe sizes of pipe insulation that might be encountered, the following table is to be used.

<u>PIPE INSULATION SIZE O.D.</u>	<u>PIPE SIZE O.D.</u>	<u>SQUARE FOOTAGE PER LINEAR FOOT</u>
2-1/2"	1/2"	0.65
2-3/4"	3/4"	0.72
3"	1"	0.79
3-1/4"	1-1/4"	0.85
3-1/2"	1-1/2"	0.92
4"	2"	1.05
4-1/2"	2-1/2"	1.18
5"	3"	1.31
6"	3-1/4"	1.57
7"	3-1/2"	1.83
8"	4"	2.09
9"	5"	2.36
10"	6"	2.62
12"	8"	3.14
14"	10"	3.67
16"	12"	4.19
18"	14"	4.71

1.09 METHOD OF PAYMENT

Payment shall be made in accordance with Items A through R below. Payment shall be calculated based on the actual quantity of the item performed by the asbestos abatement



contractor, times the unit price specified below. Credits may apply to certain times, as specified below.

- A. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING PIPE INSULATION:** Actual linear footage, multiplied by the square footage factor listed for the respective pipe size in Section 1.08, multiplied by the unit price in Section 1.04.

EXAMPLE: 100 lin.ft. of 1/2" pipe and 100 lin.ft. of 6" pipe, including elbows, tees. Flanges, etc.

$$100 \times 0.65 = 65 \text{ sq.ft.} \quad 65 \times \text{unit price} = \text{Payment}$$

$$100 \times 2.62 = 262 \text{ sq.ft.} \quad 262 \times \text{unit price} = \text{Payment}$$

- B. **REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER INSULATION:** (all types including Silicate Block and including the removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.

EXAMPLE: Item B. removal and replacement of 1000 S.F. of boiler insulation (incl. Silicate block)

$$1000 \text{ S.F.} \times (1.5) \times \text{the Unit Price} = \text{Payment}$$

- C. **REMOVAL, DISPOSAL AND REPLACEMENT OF TANK INSULATION:** (all types including removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.
- D. **REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER UPTAKE, & BREACHING INSULATION:** (all types including stiffening angles and wire lath) Payment shall be made at 2.0 times the unit price per square foot.
- E. **REMOVAL, DISPOSAL AND REPLACEMENT OF DUCT INSULATION:** Payment shall be made at 1.0 times the unit price per square foot.
- F. **REMOVAL, DISPOSAL AND REPLACEMENT OF SOFT ASBESTOS CONTAINING MATERIAL:** (Including sprayed-on fire proofing and sound proofing) Payment shall be made at 1.0 times the unit price per square foot of surface area. Area of irregular surfaces must be calculated and confirmed with DDC representative.
- G. **ACOUSTIC PLASTER REPAIR AND/OR ENCAPSULATION:** Payment shall be made at 0.5 times the unit price per square foot.
- H. **PATCHING OR REPAIR** of items listed in A through F will be paid at 0.33 times the unit price per square foot.



- I. **REMOVAL, DISPOSAL AND REPLACEMENT OF WATERPROOFING ASBESTOS CONTAINING MATERIAL:** (including friable and non-friable waterproofing material from interior and exterior walls, floors, foundations, penetrations, louvers, vents and openings other than windows, doors and skylights) Payment shall be made at 0.5 times the unit price per square foot.
- J. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING ELECTRICAL WIRING INSULATION:** (including friable and non-friable wiring insulation) Payment shall be made at 0.33 times the unit price per square foot.
- K. **PAINTING:** Payment shall be made at 0.05 times the unit price per square foot.
- L. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING PLASTER:** from ceilings and walls, including any wire lath and disposal as asbestos containing waste. Payment shall be made at 0.80 times the unit price per square foot.
- M. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING FLOOR TILES, CEILING TILES, TRANSITE PANELS:** (including any adhesive, glue, mastic and/or underlayment) and disposal as asbestos containing waste. Payment shall be made at 0.40 times the unit price per square foot. If multiple layers are discovered, each additional layer shall be paid at 0.20 times the unit price per square foot.
- N. **ADDITIONAL CLEAN UP/HOUSEKEEPING OF WORK AREA:** (excluding pre-cleaning of work area required by regulations) HEPA vacuuming and wet cleaning of asbestos contaminated surface. Payment shall be made at 0.20 times the unit price per square foot. When GLOVE BAG is employed to remove ACM, cost of HEPA vacuuming and wet cleaning of floor area up to 3 feet on each side of glove-bag shall be included in unit price and no extra payment will be made.
- O. **REMOVAL, DISPOSAL OF ASBESTOS-CONTAINING ROOFING MATERIAL:** including mastic, flashing and sealant compound and provide temporary asbestos-free roof covering consisting of one layer of rolled roofing paper sealed with asphaltic roofing compound. Payment shall be made at 0.8 times the unit price per square foot. Credit at a rate of 0.33 times the unit price will be taken for each square foot of temporary roof covering which the Asbestos abatement contractor is directed not to install.
- P. **PICK-UP AND DISPOSAL OF GROSS DEBRIS:** (excluding any waste generated from abatement under Item A-R) at a rate of \$150 per cubic yard for asbestos contaminated waste and \$75 per cubic yard for non-asbestos contaminated waste. This cost includes all labor and material cost associated with work.
- Q. **REMOVAL OF ASBESTOS-CONTAINING BRICK, BLOCK, MORTAR, CEMENT OR CONCRETE:** along with all surfacing materials including wire



lath and/or other supporting structures and disposal as ACM waste. Payment shall be made at a rate of \$25.00 per cubic foot of material removed.

- R. **REMOVAL AND DISPOSAL OF ASBESTOS CONTAINING WINDOW/DOOR CAULKING:** including friable and non-friable caulking, weather-stripping, glazing, sealants or other waterproofing materials applied to windows, doors, skylights, etc. Payment shall be made at the rate of \$400.00 per opening regardless of size or configuration. This cost includes labor, consumable materials, set-up/breakdown, removal and disposal, as required.

Note 1: CREDIT: For items listed in A through F, a credit at a rate of 0.33 times the unit price, times the respective multiplier (for each item) will be taken for each square foot of insulation which the asbestos abatement contractor is not directed to reapply.

Note 2: MINIMUM PAYMENT: The minimum payment per call at any individual job sites or various job sites during the same day will be eight hundred dollars (\$800.00).

Note 3: All payments shall be made as described in paragraph 1.09 herein.

Note 4: WORKING HIGHER THAN 12 FEET ABOVE FLOOR LEVEL OR WORK REQUIRING COMPLEX SCAFFOLDING OR CONSTRUCTION WORK PLATFORMS: Provisions are made in this Contract to compensate the Asbestos abatement contractor for work performed in locations that are difficult to access due to work at elevations that are significantly higher than the normal work level. The unit price for these items will be paid at 1.20 times the unit price described in Paragraphs 1.09, A through R for those portions of the work that are more than twelve (12) feet above the grade for that would be judged as the normal working level.

1.10 GUARANTEE

- A. Work performed in compliance with each task shall be guaranteed for a period of one year from the date the completed work is accepted by the Department of Design and Construction.
- B. The Commissioner of The Department of Design and Construction will notify the Asbestos abatement contractor in writing regarding defects in work under the guarantee.

1.11 OCCUPANCY OF SITE NOT EXCLUSIVE

Attention is specifically drawn to the fact that contractors, performing the work of other Contracts, may be brought upon any of the work sites of this Contract. Therefore, the Asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other contractors who may be brought upon any site of the work of this Contract. This paragraph applies to those areas outside the regulated Work Area as defined by Title 15, Chapter I of RCNY.

1.12 SUBMITTALS

A. Pre-Construction Submittals:

1. Attend a pre-construction meeting scheduled by the City of New York Department of Design and Construction. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project Manager. At this meeting, the Asbestos abatement contractor shall present three copies of the following items:
 - a. Asbestos abatement contractor's scope of work, work plan and schedule.
 - b. Asbestos project notifications, approved variances and plans to Government Agencies.
 - c. Copies of Permits, clearance and licenses if required.
 - d. Schedules: the Asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. Asbestos abatement contractor shall post a copy of all schedules at the site:
 - (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.
 - (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.
 - e. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number to nearest hospital) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.



- f. Safety Data Sheets (SDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until SDS are reviewed.
- g. Worker Training and Medical Surveillance: The Asbestos abatement contractor shall submit a list of the persons who will be employed by him /her to perform the removal work. Present evidence that workers have received proper training required by the regulations and the medical examinations required by OSHA 29 CFR 1926.1101.
- h. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
 - (1) The Asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain on title page the project name, name, address and phone number of the Asbestos abatement contractor; name, address and phone number of Asbestos abatement contractor and City's third party air monitoring firm; emergency numbers including, but not limited to local Fire/Rescue Department. Log book shall contain a list of personnel approved for entry into the Work Area.
 - (2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the Asbestos abatement contractor shall submit the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.
- i. Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.

B. During Construction Submittals:



1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.
2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
3. Floor plans indicating Asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager.
4. All Asbestos abatement contractors' air monitoring and inspection results.

C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the Asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from Asbestos abatement contractor, Sub-Asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,
3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.
8. Project Record: The Asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall be submitted to DDC as part of the close out documents. The project record shall consist of:



- a. Copies of licenses of all asbestos abatement contractors involved in the project;
- b. Copies of NYCDEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
- c. Copies of all project notifications and reports filed with NYCDEP, NYSDOL and USEPA for the project, with any amendments or variances;
- d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
- e. A copy of the air sampling log and all air sampling results;
- f. A copy of the abatement asbestos abatement contractor's daily log book;
- g. Copies of all asbestos waste manifests;
- h. A copy of all Project Monitor's Reports (ACP-15).
- i. A copy of each ATR-1 Form completed for the asbestos project (if required).
- j. A copy of each Asbestos Project Conditional Closeout Report (ACP-20) if required.
- k. A copy of the Asbestos Project Completion Form (ACP-21).

1.13 PROTECTION OF FURNITURE AND EQUIPMENT

Cover all furniture and equipment that cannot be removed from Work Areas. Movable furniture and equipment will be removed from Work Areas by the Asbestos abatement contractor prior to start of work. At the conclusion of the work (after final air testing), the Asbestos abatement contractor will remove all plastic covering on walls, floors, furniture, equipment and reinstall furniture and equipment. He shall remove and store all sheaths, curtains and drapes, and reinstall same following final clean up.

1.14 UTILITIES

A. General:

All temporary facilities shall be subject to the approval of the Commissioner. Prior to starting work at any site, locations and/or sketches (if required) of



temporary facilities must be submitted to the Construction Project Manager for the required approval.

B. Water:

The Department of Design and Construction will furnish all water needed for construction, at no cost to the Asbestos abatement contractor in buildings under their jurisdiction. However, it is the responsibility of the Asbestos abatement contractor to ensure that hot water is provided for showering in the decontamination unit. The Asbestos abatement contractor shall furnish, install and maintain any needed equipment to meet these requirements at his own expense.

C. Electricity:

The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the Asbestos abatement contractor in a building, under their jurisdiction. The Asbestos abatement contractor is responsible for routing the electric power to the abatement Work Area.

All temporary lighting and temporary electrical service for Work Area shall be in weatherproof enclosures and be ground fault protected.

- D.** In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the Asbestos abatement contractor. However, it is the Asbestos abatement contractor's (or the General contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

1.15 FEES

The Asbestos abatement contractor shall be responsible for any and all fees or charges imposed by Local, State or Federal Law, Rule and Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the date of the Bid opening.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 028213
JULY 2017 VERSION**

ASBESTOS ABATEMENT

PART 1 – GENERAL

1.01 DESCRIPTION

- A. The Contract Documents are as defined in the “Agreement”. The General Conditions shall apply to all Work of this Section.
- B. Work specified herein shall be the removal and disposal of Asbestos-Containing Materials (ACM) and asbestos-contaminated materials from designated areas of the Francis Martin Branch Library located at 2150 University Avenue, Bronx, New York 10453.
- C. The following documents were reviewed and utilized to generate this abatement design specification which serves to locate and quantify the amount of ACM, and asbestos contaminated material, to be abated in support of this project.
 - 1. A set of 100% Final Design Drawings titled “Replacement of HVAC, BMS and Fire Alarm System in Francis Martin Branch Library,” dated 11/30/10 prepared by Greenman Pedersen, Inc.
 - 2. “Final Report of Asbestos Survey Services, Francis Martin Branch Library Replacement of HVAC and BMS System” performed by LiRo dated 03/11/11.
- D. The phasing and scheduling of work for this project shall be coordinated with and approved by the Construction Project Manager and Facility Manager. The Construction Project Manager and Facility Manager will make the final determination on all issues under this Contract covered by this Specification.

1.02 SCOPE OF WORK

- A. The asbestos abatement contractor is to provide all labor, materials, equipment, services, testing, appurtenances, permits and agreements necessary to perform the work required for the abatement of ACM as required by these contract documents. All work shall be performed in accordance with this Specification, EPA regulations, OSHA regulations, New York City Local Law 70, Title 15, Chapter 1 RCNY, New York State Industrial Code 56, NIOSH recommendations, and any other applicable federal, state or local government regulations. Whenever there is a conflict or overlap of the above references, the most stringent provisions are applicable.



- B. The intent of this Specification section is to ensure that the asbestos abatement contractor is responsible for the following:
1. Abatement of all ACM.
 2. Cleaning and decontamination of the entire affected area.
 3. Demolition that may be required to access ACM in each area, Asbestos abatement contractor shall dispose of all debris associated with demolition activities as ACM waste.
 4. Removal and disposal of all ACM; all roof patch material, underlying roofing components, including but not limited to roof membrane and insulation down to the substrate/deck, etc.
 5. Provide all scaffolding, platform installation, equipment, tools, transportation and any other equipment required and/or necessary to complete all work described in the Contract Documents.
 6. The Asbestos abatement contractor shall be responsible for and shall include any and all fees or charges imposed by Local, State or Federal Law, Rule or Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the work.
 7. Prior to destructive demolition activities, the DDC may elect to collect bulk samples of assumed asbestos-containing materials and analyze the bulk samples for asbestos content.
- C. The Asbestos abatement contractor shall perform the following work as described below and indicated on the drawings. The drawings are only a diagrammatic representation of the Work Areas and do not constitute the actual quantities of material. Asbestos abatement contractor is responsible for the confirmation of the actual total quantities of the Work.

1. Drawing H002.00: Roof Plan

- a. Remove and dispose of asbestos-containing of roof patch material within Work Area 1. Asbestos-containing materials within Work Area 1 shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-107 Foam Procedure for Roof Removal.

Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
1	NYCDEP Title 15, Chapter 1, § 1-107 Foam Procedure for Roof Removal	101 Sq. Ft. of Roof Patch Material	-



- D. The facility is under the jurisdiction of the New York City Public Library. The asbestos abatement contractor shall perform the work of this contract in a manner that will be least disruptive to the normal use of the building.
- E. Asbestos abatement contractor's attention is directed to the fact that patents cover certain methods of asbestos abatement indicated in the specifications. To date, patents have been issued with regard to negative pressure enclosures or negative or reduced pressure and glove-bag.
- F. Asbestos abatement contractor shall be solely responsible for and shall hold the City of New York Department of Design and Construction and the City harmless from, any and all damages, losses and expenses resulting from any infringement by Asbestos abatement contractor of any patent, including but not limited to the patents described above, used by Asbestos abatement contractor during performance of this agreement.
- G. Prior to starting, the asbestos abatement contractor must notify the Commissioner of the City of New York Department of Design and Construction if he anticipates any difficulty in performing the work as directed and required by these Specifications. Asbestos abatement contractor shall be required to attend an on-site job meeting with the Construction Project Manager prior to start of work to examine conditions of the site for removal and plan the sequence for removal operations.
- H. The asbestos abatement contractor shall retain a certified Project Designer for the preparation of an Asbestos Variance Application (ACP-9), if required.
- I. The asbestos abatement contractor shall be responsible for preparing and submitting all filings, notifications, amendments and variances, etc. required by all City, State and Federal regulatory agencies having jurisdiction, at no additional cost to the NYC DDC.
- J. The general contractor shall retain a Registered Design Professional (person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York) to prepare a Work Place Safety Plan (WPSP), if required.
- K. The general contractor shall retain a Registered Design Professional (person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York) to perform final inspections required pursuant to Title 28 of the Administrative Code, including but not limited to special inspections required under Chapter 17 of the Building Code. Such special inspections and A-TR1 forms shall be completed by the Registered Design professional.



- L. For coordination with other Asbestos abatement contractors, see the General Conditions governing all Contracts.

- M. Related Asbestos Removal Work Under Other Contracts:
 - 1. Each asbestos abatement contractor shall be responsible for the removal of incidental asbestos not identified in this section and found prior to or during the Work.
 - 2. Incidental asbestos is defined as ACM that is discovered during the course of their work that must be abated to enable them to perform the work of their Contract.

- N. Work Hours:
 - 1. The asbestos abatement contractor shall establish his work schedule in a way that avoids interference or conflict with the normal functioning of the facility. Work in the evenings shall be done at no additional cost to the City.
 - 2. All work shall be done during regular working hours unless the Asbestos abatement contractor requests authorization to work other than regular working hours and such authorization is granted by the Commissioner (Regular working hours are those during which any given facility in which work is to be done is customarily open and functioning). If such work schedule is authorized by the Commissioner the work shall be done at no additional cost to the City.
 - 3. The order of phases and start dates associated with each will be determined by the Construction Project Manager.
 - 4. Asbestos abatement contractor shall be required to schedule waste transfer during evening hours, when activity within the facility is at a minimum. Evening hours are defined as 6:00 p.m. to 6:00 a.m. Waste transfer must be approved by the Construction Project Manager and Facility Manager.

- O. The following conditions shall apply to all temporary shutdowns of existing services:
 - 1. All temporary lighting and temporary electrical services for use in the Work Area shall be in weather proof enclosures and be ground fault protected and:
 - 2. Shall be performed at no additional charge to the City.
 - 3. Shall be performed at times not interfering with the other activities in the building.



4. Shall be performed only with written consent from the Commissioner and the Facility Manager.
 5. Shall be made through written request to the Commissioner at least 10 days in advance with complete written description of the work to be performed.
- P. Stages of Asbestos Removal Work:
1. The asbestos abatement contractor will be required to perform the work and it is the intent of this Specification to remove all asbestos containing and asbestos contaminated materials from the Work Area. The asbestos abatement contractor is responsible for verifying all quantities of materials listed.
- Q. Certain equipment in the Work Area may need to remain operational during removal. Therefore, the removal of ACM from this equipment shall be performed as the last removal activities within the Work Area. The Asbestos abatement contractor shall coordinate the scheduling for the removal of ACM on functioning equipment with the Construction Project Manager.

1.03 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (5) below. The asbestos abatement contractor must submit documentation demonstrating compliance with all listed requirements. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, demonstrate for the three year period prior to the work, that it has been licensed by the New York State Department of Labor, as an "Asbestos Abatement Contractor".
 2. The asbestos abatement contractor must, for the three year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 3. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must provide evidence of having successfully performed and completed in a timely fashion at least five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$1,000,000 in each of the three years.
 4. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following



information for the project; name and location of the project; name title and telephone number of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work; brief description of the work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.

5. The asbestos abatement contractor must demonstrate that it has the financial resources, supervisory personnel and equipment necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract.
- B. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof. Provide materials or workmanship that meet or exceed the specifically named codes or standards where required by these specifications.
- C. Site Investigation: Asbestos abatement contractor shall inspect all the specifications and related drawings, and will investigate and confirm the site conditions affecting the work, including, but not limited to:
1. Physical considerations and conditions of both the material and structure. These considerations include any obstacles or obstructions encountered in accessing or removing the material.
 2. Handling, storage, transportation and disposal of the material.
 3. Availability of qualified and skilled labor.
 4. Availability of utilities.
 5. Exact quantities of all materials to be disturbed and/or removed.

1.04 WORK BY OTHERS

The City reserves the right during the term of this Contract to have work performed on asbestos abatement projects by other asbestos abatement contractors as the situation warrants.

1.05 DEFINITIONS

- A. General Explanation: Certain terms used in this Specification Section are defined below. Definitions and explanations of this Specification Section are not



necessarily complete or exclusive, but are general for the Work to the extent they are not stated more explicitly in another element of the Contract Documents.

B. Definitions in General Use:

1. Approve: Where used in conjunction with Engineer's response to submittals, requests, applications, inquiries, reports and claims by Asbestos abatement contractor, the meaning of term "approved" will be held to limitations of Engineer's responsibilities and duties as specified in Contract Documents. In no case will "approval" by Engineer be interpreted as a release of Asbestos abatement contractor from responsibilities to fulfill requirements of Contract Documents.
2. Directed, Requested, etc.: Where not otherwise explained, terms such as "directed," "requested," "authorized," "selected," "approved," "required," "accepted," and "permitted" mean "directed by Engineer," "requested by Engineer," and similar phrases. However, no such implied meaning will be interpreted to extend Engineer's responsibility into Asbestos abatement contractor's responsibility for construction supervision.
3. Furnish: Except as otherwise defined in greater detail, term "furnish" is used to mean supply and deliver to project site, ready for unloading, unpacking, assembly, installation, etc., as applicable in each instance.
4. Indicated: The term "indicated" is a cross-reference to graphic representations, notes or schedules on Drawings, to other paragraphs or schedules in the Specifications, and to similar means of recording requirements in Contract Documents. Where terms such as "shown," "noted," "scheduled," and "specified" are used in lieu of "indicated," it is for purpose of helping reader locate cross-reference, and no limitation of location is intended except as specifically noted.
5. Install: Except as otherwise defined in greater detail, term "install" is used to describe operations at Project site including unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning and similar operations, as applicable in each instance.
6. Installer: The term "installer" is defined as the entity (person or firm) engaged by the asbestos abatement contractor, or its sub-asbestos abatement contractor for performance of a particular unit of work at Project site, including installation, erection, application and similar required operations. It is a general requirement that such entities (installers) be expert in operations they are engaged to perform.



7. Provide: Except as otherwise defined in greater detail, term "provide" means furnish and install, complete and ready for intended use, as applicable in each instance.
8. Third-Party Air Monitor: The term "Third-Party Air Monitor" is defined as an entity engaged by City and Construction Project Manager to perform specific inspections or tests of the work, either at Project site or elsewhere; and to report and (if required) interpret results of those inspections or tests.

C. Definitions Relative to Asbestos Abatement:

1. Abatement: Any and all procedures physically taken to control fiber release from asbestos-containing materials. This includes removal, encapsulation, enclosure, cleanup and repair.
2. Adequately Wet: The complete penetration of a material with amended water to prevent the release of particulates. If visible emissions are observed coming from asbestos-containing material, then the material has not been adequately wetted. However, the absence of visible emissions is not evidence of being adequately wet. ACM must be fully penetrated with the wetting agent in order to be considered adequately wet. If the ACM being abated is resistant to amended water penetration, wetting agent shall be applied to the material prior to and during removal as necessary to minimize fiber release.
3. Aggressive Sampling: Method of sampling in which the individual collecting the air sample creates activity by the use of mechanical equipment during the sampling period to stir up settled dust and simulate activity in that area of the building.
4. AHERA: Asbestos Hazard Emergency Response Act of 1986
5. AIHA: American Industrial Hygiene Association.
6. Airlock: System for permitting entrance and exit while restricting air movement between a contaminated area and an uncontaminated area. It consists of two curtained doorways separated by a distance of at least three feet such that one passes through one doorway into the airlock, allowing the doorway sheeting to overlap and close off the opening before proceeding through the second doorway, thereby preventing flow-through contamination.
7. Air Sampling: Process of measuring the fiber content of a known volume of air collected during a specific period. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400, or the provisional



transmission electron microscopy methods developed by the US EPA which is utilized for lower detection levels and specific fiber identification.

8. Ambient Air Monitoring: "Ambient air monitoring" shall mean measurement or determination of airborne asbestos fiber concentrations outside but in the general vicinity of the worksite.
9. Amended Water: Water to which a surfactant has been added.
10. ANSI: American National Standards Institute
11. Area Air Sampling: Any form of air sampling or monitoring where the sampling device is placed at some stationary location.
12. Asbestos: Any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite (cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthophyllite and actinolite.
13. Asbestos-Containing Material (ACM): Asbestos or any material containing more than one-percent asbestos.
14. Asbestos-Containing Waste Material: ACM, asbestos-contaminated objects or debris associated with asbestos abatement requiring disposal.
15. Asbestos-Contaminated Objects: Any objects which have been contaminated by asbestos or asbestos-containing material.
16. Asbestos Assessment Report: "Asbestos Assessment Report" shall mean the "Form ACP-5" form, as approved by NYCDEP, by which a NYCDEP-certified asbestos investigator certifies that a building or structure (or portion thereof) is free of ACM or the amount of ACM to be abated constitutes a minor project.
17. Asbestos Handler: Individual who disturbs, removes, repairs, or encloses asbestos material. This individual shall have completed approved training course(s) and be in possession of certification issued by NYCDEP and NYSDOL.
18. Asbestos Handler Supervisor: Individual who supervises the handlers during an asbestos project and ensures that proper asbestos abatement procedures as well as individual safety procedures are being adhered to. This individual shall have completed approved training course(s) and be in possession of certification issued by NYCDEP and NYSDOL.



19. Asbestos Investigator: An individual certified by NYCDEP as having successfully demonstrated his or her ability to identify the presence of and evaluate the condition of asbestos in a building or structure.
20. Asbestos Project: Any form of work performed in a building or structure which will disturb (e.g., remove, enclose, encapsulate) asbestos-containing material.
21. ASTM: American Society for Testing and Materials.
22. Asbestos Project Notification: The "Form ACP-7" asbestos project notification form as approved by DEP.
23. Authorized Visitor: Authorized visitor shall mean the building owner and his/her representative, and any representative of a regulatory or other agency having jurisdiction over the project.
24. Building Owner: Person in whom legal title to the premises is vested unless the premises are held in land trust, in which instance Building Owner means the person in whom beneficial title is vested.
25. Building Materials: Any and all manmade materials, including but not limited to interior and exterior finishes, equipment, bricks, mortar, concrete, plaster, roofing, flooring, caulking, sealants, tiles, insulation, and outdoor paving such as sidewalks, paving tiles and asphalt.
26. Certified Industrial Hygienist (CIH): Individual with a minimum of five years experience as an industrial hygienist and who has successfully completed both levels of the examination administered by the American Board of Industrial Hygiene and who is currently certified by that board.
27. Certified Safety Professional (CSP): Individual having a bachelor's degree from an accredited college or university and a minimum of four years experience as a safety professional and who has successfully completed both levels of the examination administered by the Board of Certified Safety Professionals and who is currently certified by that board.
28. Chain of Custody: "Chain of Custody" shall mean the form or set of forms that document the collection and transfer of a sample.
29. City: City of New York
30. Clean Room: An uncontaminated area or room that is part of worker decontamination enclosure system with provisions for storage of workers' street clothes and protective equipment.



31. Clearance Air Monitoring: Employment of aggressive sampling techniques with a volume of air collected to determine the airborne concentration of residual fibers and shall be performed as the final abatement activity.
32. Commissioner: shall mean the head of the Agency that has entered into this contract or his/her duly authorized representative.
33. Competent Person: Shall mean the designated person as defined by OSHA in 29 CFR1926.1101.
34. Curtained Doorway: Device that consists of at least three overlapping sheets of fire retardant plastic over an existing or temporarily framed doorway. One sheet shall be secured at the top and left side, the second sheet at the top and right side, and the third sheet at the top and left side. All sheets shall have weights attached to the bottom to ensure that the sheets hang straight and maintain a seal over the doorway when not in use.
35. Decontamination Enclosure System: Series of connected rooms, separated from the Work Area and from each other by air locks, for the decontamination of workers, materials, waste containers, and equipment.
36. Demolition: The dismantling or razing of a building, including all operations incidental thereto (except for asbestos abatement activities), for which a demolition permit from the New York City Department of Buildings is required.
37. NYCDEP or DEP: The New York City Department of Environmental Protection.
38. Disturb: Any action taken which may alter, change, or stir, such as but not limited to the removal, encapsulation, enclosure or repair of asbestos-containing material.
39. DOB: The New York City Department of Buildings.
40. Egress: A continuous and unobstructed path of vertical and horizontal egress travel from any occupied portion of a building or structure to a public way. A means of egress consists of three separate and distinct parts: the exit access, the exit and the exit discharge.
41. ELAP: Environmental Laboratory Approval Program administered by the New York State Department of Health.
42. Encapsulant (sealant) or Encapsulating Agent: Liquid material which can be applied to ACM and which temporarily controls the possible release of asbestos fibers from the material either by creating a membrane over the



surface (bridging encapsulant) or by penetrating into the material and binding its components together (penetrating encapsulant). A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.

43. Encapsulation: The coating or spraying of asbestos-containing material encapsulant. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.
44. Enclosure: Construction of airtight walls and/or ceilings between ACM and the facility environment, or around surfaces coated with ACM, or any other appropriate procedure as determined by the NYCDEP which prevents the release of asbestos fibers.
45. EPA or USEPA: United States Environmental Protection Agency.
46. Equipment Room: Contaminated area or room that is part of the worker decontamination enclosure system with provisions for the storage of contaminated clothing and equipment.
47. Exit: That portion of a means of egress system which is separated from other interior spaces of a building or structure by fire-resistance-rated construction to provide a protected path of egress travel between the exit access and the exit discharge.
48. FDNY: The Fire Department of the City of New York.
49. Fiber: An acicular single crystal or a similarity elongated polycrystalline aggregate which displays some resemblance to organic fibers by having such properties as flexibility, high aspect ratio, silky luster, axial lineation, and others, and which has attained its shape primarily through growth rather than cleavage.
50. Fixed Object: A unit of equipment, furniture, or other item in the work area which cannot be removed from the work area. Fixed objects shall include equipment, furniture, or other items that are attached, in whole or in part, to a floor, ceiling, wall, or other building structure or system or to another fixed object and cannot be reasonably removed from the work area. Fixed objects shall also include pipes and other equipment inside the work area which are not the subject of the asbestos project. Active fire suppression system components shall not be considered fixed objects.



51. Glovebag technique: shall mean a method for removing asbestos-containing material from heating, ventilation and air conditioning (HVAC) ducts, short piping runs, valves, joints, elbows, and other nonplanar surfaces. The glovebag assembly is a manufactured device consisting of a large bag (constructed of at least 6-mil transparent plastic), two inward-projecting long sleeve gloves, one inward-projecting waterwand sleeve, an internal tool pouch, and an attached, labeled receptacle for asbestos waste. The glovebag is constructed and installed in such a manner that it surrounds the object or area to be decontaminated and contains all asbestos fibers released during the removal process.
52. HEPA-Filter: High efficiency particulate air filter capable of trapping and retaining 99.97 percent of particles (asbestos fibers) greater than 0.3 micrometers mass median aerodynamic equivalent diameter.
53. HEPA vacuum equipment: "HEPA vacuum equipment" shall mean vacuuming equipment with a HEPA filter.
54. Holding Area: Chamber in the equipment decontamination enclosure located between the washroom and an uncontaminated area.
55. Homogeneous Work Area: Portion of the Work Area that contains one type of ACM and/or where one type of abatement is used.
56. Industrial Hygiene: Science and art devoted to the recognition, evaluation, and control of those environmental factors or stresses, arising in or from the work place, which may cause sickness, impaired health and well being, or significant discomfort and inefficiency among worker or among the citizens of the community.
57. Industrial Hygienist: Individual having a college or university degree or degrees in Engineering, Chemistry, Physics or Medicine, or related Biological Sciences who, by virtue of special studies and training, has acquired competence in industrial hygiene. Such special studies and training must have been sufficient in all of the above cognate sciences to provide the abilities:
 - a. To recognize the environmental factors and to understand their effect on people and their well being; and
 - b. To evaluate, on the basis of experience and with the aid of quantitative measurement techniques, the magnitude of these stresses in terms of ability to impair people's health and well being; and



- c. To prescribe methods to eliminate, control, or reduce such stresses when necessary to alleviate their efforts.
58. Isolation Barrier: The construction of partitions, the placement of solid materials, and the plasticizing of apertures to seal off the work place from surrounding areas and to contain asbestos fibers in the work area.
59. Large Asbestos Project: Asbestos project involving the disturbances (e.g., removal, enclosure, encapsulation) of 260 linear feet or more of ACM or 160 square feet or more of ACM.
60. Log: An official record of all activities that occurred during the project. At a minimum, the log shall identify the building owner, agent, asbestos abatement contractor, and workers, and other pertinent information including daily activities, cleanings and waste transfers, names and certificate numbers of asbestos handler supervisors and asbestos handlers; results of inspections of decontamination systems, barriers, and negative pressure ventilation equipment; summary of corrective actions and repairs; work stoppages with reason for stoppage; manometer readings at least twice per work shift; daily checks of emergency and fire exits and any unusual events.
61. Minor Project: A project involving the disturbance (e.g., removal, enclosure, encapsulation, repair) of 25 linear feet or less of asbestos containing material or 10 square feet or less of asbestos containing material.
62. Movable Object: Unit of equipment or furniture in the Work Area that can be removed from the Work Area.
63. Negative Air Pressure Equipment: Portable local exhaust system equipped with HEPA filtration. The system shall be capable of creating a negative pressure differential between the outside and inside of the Work Area.
64. NESHAPS: National Emission Standards for Hazardous Air Pollutants.
65. NFPA: The National Fire Protection Association.
66. NIOSH: National Institute for Occupational Safety and Health.
67. DEP or NYCDEP: New York City Department of Environmental Protection
68. NYSDOL: New York State Department of Labor.
69. NYSDOL ICR 56: "NYSDOL ICR 56" shall mean Part 56 of the Official Compilation of Codes, Rules and Regulations of the State of New York or 12 NYCRR Part 56.



70. NYSDOH: The New York State Department of Health.
71. Obstruction: The blocking of a means of egress with any temporary structure or barrier. A double layer of fire-retardant 6-mil polyethylene sheeting shall not be considered an obstruction when it is prominently marked as an exit with photo luminescent signage or paint and cutting tools (knife, razor) are attached to the work area side of the sheeting for use in the event that the sheeting must be cut to permit egress. A corridor shall not be considered obstructed when there is a clear path measuring at least three (3) feet wide.
72. Occupied Area: Area of the work site where abatement is not taking place and where personnel or occupants normally function or where workers are not required to use personal protective equipment.
73. OSHA: Occupational Safety and Health Administration.
74. Outside air: "Outside air" shall mean the air outside the work place.
75. Person: Individual, partnership, company, corporation, association, firm, organization, governmental agency, administration, or department, or any other group of individuals, or any officer or employee thereof.
76. Personal Air Monitoring: Method used to determine employees' exposure to airborne asbestos fibers. The sample is collected outside the respirator in the worker's breathing zone.
77. Personal Protective Equipment (PPE): Appropriate protective clothing, gloves, eye protection, footwear, and head gear.
78. Phase Contrast Microscopy (PCM): The measurement protocol for the assessment of the fiber content of air. (NIOSH Method 7400).
79. Physician: Person licensed or otherwise authorized under Article 131 Section 65.22 of the New York State Education Law.
80. Plasticize: To cover floors and walls with fire retardant plastic sheeting as herein specified or by using spray plastics as acceptable to the Department.
81. Polarized Light Microscopy (PLM): The measurement protocol for the assessment of the asbestos content of bulk materials. (Interim Method for the Determination of Asbestiform Materials in Bulk Insulation Samples- 40 CFR Part 763, Subpart F, Appendix A as amended on September 1, 1982)



82. Project Designer: A person who holds a valid Project Designer Certificate issued by the New York State Department of Labor.
83. Project Monitor: A person who holds a valid Project Monitor Certificate issued by the New York State Department of Labor.
84. Qualitative Fit Test: Individual test subject's responding (either voluntarily or involuntarily) to a chemical challenge outside the respirator face-piece. Acceptable methods include irritant smoke test, odorous vapor test, and taste test.
85. Quantitative Fit Test: Exposing the respiratory wearer to a test atmosphere containing an easily detectable, nontoxic aerosol, vapor or gas as the test agent. Instrumentation, which samples the test atmosphere and the air inside the face-piece of the respirator, is used to measure quantitatively the leakage into the respirator. There are a number of test atmospheres, test agents, and exercises to perform during the test.
86. Registered Design Professional: A person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York.
87. Removal: Stripping of any asbestos- containing materials from surfaces or components of a facility or taking out structural components in accordance with 40 CFR 61 Subparts A and M.
88. Renovation: An addition or alteration or change or modification of a building or the service equipment thereof, that is not classified as an ordinary repair as defined in §27-125 of the Administrative Code of the City of New York.
89. Repair: Corrective action using specified work practices (e.g., glovebag, plastic tent procedures, etc.) to minimize the likelihood of fiber release from minimally damaged areas of ACM.
90. Replacement material: Any material used to replace ACM that contains less than .01 percent asbestos.
91. Shift: A worker's, or simultaneous group of workers', complete daily term of work.
92. Shower Room: Room between the clean room and the equipment room in the worker decontamination enclosure with hot and cold running water controllable at the tap and arranged for complete showering during decontamination.



93. Small Asbestos Project: Asbestos project involving the disturbance (e.g., removal, enclosure, encapsulation) of more than 25 and less than 260 linear feet of ACM or more than ten and less than 160 square feet of ACM.
94. Staging Area: Work Area near the waste transfer airlock where containerized asbestos waste has been placed prior to removal from the Work Area.
95. Strip: To remove asbestos materials from any part of the facility.
96. Structural Member: Load-supporting member of a facility, such as beams and load-supporting walls, or any non-load-supporting member, such as ceiling and non-load-supporting walls.
97. Surface barriers: The plasticizing of walls, floors, and fixed objects within the work area to prevent contamination from subsequent work.
98. Surfactant: Chemical wetting agent added to water to improve penetration.
99. Transmission Electron Microscopy (TEM): The measurement protocol for the assessment of the asbestos fiber content of air. Interim Transmission Electron Microscopy Analytical Methods-40 CFR Part 763, Subpart E, Appendix A.
100. Visible Emissions: Emissions containing particulate material that are visually detectable without the aid of instruments.
101. Washroom: Room between the Work Area and the holding area in the equipment decontamination enclosure system where equipment and waste containers are wet cleaned and/or HEPA-vacuumed prior to disposal.
102. Waste decontamination enclosure system: "Waste decontamination enclosure system" shall mean the decontamination enclosure system designated for the controlled transfer of materials and equipment, consisting of a washroom and a holding area.
103. Wet Cleaning: "Wet cleaning" shall mean the removal of asbestos fibers from building surfaces and objects by using cloths, mops, or other cleaning tools which have been dampened with water.
104. Wet methods: "Wet methods" shall mean the use of amended water or removal encapsulants to minimize the generation of fibers during ACM disturbance.
105. Work Area: Designated rooms, spaces, or areas of the building or structure where asbestos abatement activities take(s) place.



106. Worker Decontamination Enclosure System: Portion of a decontamination enclosure system designed for controlled passage of workers and authorized visitors, consisting of a clean room, a shower room, and an equipment room separated from each other and from the Work Area by airlocks and curtained doorways.
107. Work Place: The work area and the decontamination enclosure system(s).
108. Work Place Safety Plan: Construction documents prepared by a registered design professional and submitted for review by DEP in order to obtain an asbestos abatement permit. Such plan shall include, but not be limited to, plans, sections, and details of the work area clearly showing the extent, sequence, and means and methods by which the work is to be performed.
109. Work Site: Premises where abatement activity is being performed. May be composed of one or more Work Areas.

1.06 STANDARD OPERATING PROCEDURES

- A. Develop and implement a written standard procedure for abatement work to ensure maximum protection and safeguard from asbestos exposure of the workers, visitors, employees, public, and environment.

- B. TELEPHONE DEVICE

The asbestos abatement contractor or his authorized representative shall, at all times during the normal workday or during periods of overtime work under this Contract, carry a mobile telephone. He/she shall supply the Department of Design and Construction with the phone number for the device and he/she is liable to respond back to the calls from DDC within the next one (1) hour period after he/she receives calls from DDC. The cost to the asbestos abatement contractor for this device and all charges accruing thereto is deemed included in the work.

- C. The standard operating procedure shall ensure:
 1. Tight security from unauthorized entry into the workspace.
 2. Restriction of asbestos abatement contractor's personnel to the immediate Work Area and access/egress routes.
 3. Donning of proper protective clothing and respiratory protection prior to entering the Work Area.



4. Safe work practices in the work place, including provisions for inter-room communications, exclusion of eating, drinking, smoking, or in any way breaking the respiratory protection.
 5. Proper exit practices from the work space to the outside through the showering and decontamination facilities.
 6. Removing asbestos in a way that minimizes release of fibers.
 7. Packing, labeling, loading, transporting, and disposing of contaminated material in a way that minimizes exposure and contamination.
 8. Emergency evacuation procedures, for medical or safety situations, to minimize the potential exposure to airborne asbestos fibers for emergency personnel, building occupants, and building environment.
 9. Safety from accidents in the workspace, especially from electrical shocks, fall hazards associated with scaffolding, slippery surfaces, and entanglements in loose hoses and equipment.
 10. Provisions for effective supervision, air monitoring and personnel monitoring for exposure during the work.
 11. Engineering controls that minimize exposure to fibers within the workspace.
 12. The asbestos abatement contractor shall provide a 24-hour fire watch throughout the entire term of the project, to protect against fire and unauthorized entry into the workspace. Fire watch shall be performed by an individual who is a certified asbestos worker capable of entering the Work Area for regular inspections.
- D. Provide an Asbestos Handler Supervisor to provide continuous supervision of all work, and to be responsible for the following:
1. Ensure that individuals are using proper personal protective equipment, are trained in its use and hold valid NYCDEP and NYSDOL Asbestos Handler certificates
 2. Maintain entry log records and ensure that they are recorded in accordance with the provisions of Title 15, Chapter 1 of RCNY and NYSDOL ICR 56.
 3. Surveillance of the Work Areas at a minimum of once per work shift or as required by Title 15, Chapter 1 of RCNY and NYSDOL ICR 56 -7.3, to ensure the integrity of work place isolation, negative pressure equipment and workers personal protective equipment is not torn or ripped and that respiratory protection is worn at all times.



4. Ensure that sufficient personal protective equipment is stored in the clean room.
5. Take precautions to prevent heat stress. Precautions include, but are not limited to, selecting lightweight protective clothing, reducing the work rate, and providing adequate fluid breaks.
6. Perform work area inspection with project monitor prior to the commencement of final clearance air monitoring.
7. The asbestos abatement contractor shall retain the asbestos handler supervisor to perform a visual inspection prior to the post-abatement clearance air monitoring to confirm that all containerized waste has been removed from work and holding areas and there is no visible ACM debris or residue on or about all abated surfaces.

E. ENGINEERING CONTROLS

1. The 8-hour time weighted average airborne concentration of fibers to which any passerby may be exposed shall not exceed 0.01 fibers per cubic centimeter of air when fibers have a physical dimension longer than 5 micrometers as determined by the method prescribed in these Specifications.
2. All asbestos projects shall utilize negative pressure ventilation equipment.
 - a. The asbestos abatement contractor shall use a manometer to document the pressure differential. The asbestos abatement contractor shall install and make the manometer operational once the negative pressure has been established in the work area. Magnahelic manometers shall be calibrated at least every six months and a copy of the current calibration certification shall be available at the work site.
3. Negative pressure ventilation equipment shall be installed and operated to provide at least one air change in the work area every 15 minutes. Where there are no floor or wall barriers because floor or wall material is being abated, there shall be at least one air change in the work area every ten minutes.
4. The negative pressure ventilation equipment shall operate continuously, 24 hours a day, from the establishment of isolation barriers through successful clearance air monitoring. If such equipment shuts off, adjacent areas shall be monitored for asbestos fibers.



5. A static negative air pressure of 0.02 inches (minimum) water column shall be maintained at all times in the work place during abatement to ensure that contaminated air in the Work Area does not filter back to uncontaminated areas.
6. If the contaminated area of an asbestos project covers the entire floor of the affected building, or an area greater than 15,000 square feet on any given floor, the installation of a negative air cut off switch or switches shall be required at a single location outside the work place, such as inside a stairwell, or at a secured location in the ground floor lobby when conditions warrant. The required switch or switches shall be installed by a licensed electrician pursuant to a permit issued by the Department of Buildings. If negative pressure ventilation equipment is used on multiple floors, the cut off switch shall be able to turn off the equipment on all floors.
7. On loss of negative pressure or electric power to the negative pressure ventilating units, abatement shall stop immediately and shall not resume until power is restored and negative pressure ventilation equipment is operating again.
8. Negative pressure ventilation equipment shall be exhausted to the outside of the building away from occupied areas.
 - a. All openings (including but not limited to operable windows, doors, vents, air intakes or exhausts of any mechanical devices) less than 15 feet from the exterior exhaust duct termination location shall be plasticized with two layers of fire retardant 6-mil polyethylene sheeting, or a second negative pressure ventilation unit with the primary unit's capacity shall be connected in series prior to exhausting to the outside.
 - b. Negative pressure ventilation equipment shall exhaust away from areas accessible to the public.
 - c. All ducting shall be sealed and braced or supported to maintain airtight joints. Ducts shall be reinforced and shall be installed so as to prevent breakage. Damage to ducts must be repaired immediately.
9. Where ducting to the outside is not possible, a second negative pressure ventilation unit compatible with the primary unit's capacity shall be connected in series. The area receiving the exhaust shall have sufficient, non-recycling exhaust capacity to the outside of the structure.



10. In the event that there is a failure of the containment system or a breach in the Isolation Barriers, all abatement work will cease and the asbestos abatement contractor will immediately correct the condition. Abatement work will not resume until the Work Area has been smoke tested by the third party laboratory and approved by the Construction Project Manager.

F. LOCKDOWN ENCAPSULATION PROCEDURES

1. The following procedures shall be followed to seal in non-visible residue while conducting lockdown encapsulation on all surfaces from which ACM has not been removed:
 - a. Only encapsulants rated as acceptable or marginally acceptable on the basis of Battelle Columbus Laboratory test procedures and rating requirements developed under the 1978 USEPA Contract shall be used for lockdown encapsulation.
 - b. The encapsulant solvent or vehicle shall not contain a volatile hydrocarbon unless reviewed and approved by DEP.
 - c. Latex paint with solids content greater than 15 percent shall be considered a lockdown sealant for coating all non-metallic surfaces.
 - d. Encapsulants shall be applied using airless spray equipment. Spraying is to occur at the lowest pressure range possible to minimize fiber release from encapsulant impact at the surface. It shall be applied with a consistent horizontal or vertical motion.
 - e. The cleaned layer of the surface barriers shall be removed from walls and floors.

The isolation barriers shall remain in place throughout cleanup. Decontamination enclosure systems shall remain in place and be utilized. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.

1.07 NOTIFICATIONS, PERMITS, WARNING SIGNS, LABELS, AND POSTERS

- A. The asbestos abatement contractor shall submit an Asbestos Project Notification (ACP-7) to the NYCDEP listing each work area within the building separately one week in advance of the start of work.



- B. The registered design professional shall obtain an asbestos abatement permit authorizing the performance of construction work as required for asbestos projects involving one or more of the following activities:
1. Obstruction of an exit door leading to an exit stair or the exterior of the building;
 2. Obstruction of an exterior fire escape or access to that fire escape;
 3. Obstruction of a fire-rated corridor leading to an exit door;
 4. Removal of handrails in an exit stair or ramp;
 5. Removal or dismantling of any fire alarm system component including any fire alarm-initiating device (e.g., smoke detectors, manual pull station);
 6. Removal or dismantling of any exit sign or any component of the exit lighting system, including photo luminescent exit path markings;
 7. Removal or dismantling of any part of a sprinkler system including piping or sprinkler heads;
 8. Removal or dismantling of any part of a standpipe system including fire pumps or valves;
 9. Removal of any non-load bearing / non-fire-rated wall (greater than 45 square feet or 50 percent of a given wall);
 10. Any plumbing work other than the repair or replacement of plumbing fixtures;
 11. Removal of any fire-resistance rated portions of a wall, ceiling, floor, door, corridor, partition, or structural element enclosure including spray-on fire resistance rated materials;
 12. Removal of any fire damper, smoke damper, fire stopping material, fire blocking, or draft stopping within fire-resistance rated assemblies or within concealed spaces;
 13. Any work that otherwise requires a permit from the DOB (full demolitions, alterations, renovations, modifications or plumbing work).
- C. The asbestos abatement contractor shall provide a floor plan showing the areas of the building under abatement and the location of all fire exits in said areas. It shall be prominently posted in the building lobby or comparable location, along with a



notice stating the location within the building of the negative air cutoff switch, if applicable.

- D. The general contractor shall submit, as required, an asbestos abatement permit due to one or more of the activities listed in 1.07 (B) (1-8) and (B) (13) of this specification. The asbestos abatement contractor is responsible for submitting, with an asbestos project notification, a work place safety plan (WPSP) and any other applicable construction documents. These documents must be prepared by a registered design professional.
- E. A WPSP is not required for projects requiring an asbestos abatement permit due to one or more of the activities listed in 1.07 (B) (9-12) of this specification. The asbestos abatement contractor shall submit, together with the asbestos project notification, all applicable asbestos abatement permit construction documents.
- F. The general contractor shall retain a Registered Design Professional to perform the inspections required pursuant to Title 28 of the Administrative Code, including but not limited to special inspections required by Chapter 17 of the Building Code, as follows:
 - 1. A final inspection shall be performed by a registered design professional retained by the asbestos abatement contractor after all work authorized by the asbestos abatement permit is completed. The person performing the inspection shall note all failures to comply with the provisions of the Building Code or approved asbestos abatement permit and shall promptly notify the owner in writing. All defects noted in such inspection shall be corrected. The final inspection report shall either:
 - a. Confirm:
 - (1) That the construction work is complete, including the reinstallation or reactivation of any building fire safety or life safety component.
 - (2) That any defects previously noted have been corrected.
 - (3) That all required inspections were performed.
 - (4) That the work is in substantial compliance with the approved asbestos abatement permit construction documents, the Building Code, and other applicable laws and rules.
 - b. Confirm:
 - (1) That the construction work does not return the building (or portion thereof) affected by the abatement project to a



condition compliant with the building code and other applicable laws and rules, but that the registered design professional has reviewed an application for asbestos abatement permit construction documents approval that has been approved by the department of buildings, and the subsequent scope of work as approved will, upon completion, render all areas affected by the asbestos project in full compliance with the building code and all applicable laws and rules.

- (2) That any defects previously noted that are not addressed by the subsequent scope of work as approved by the department of buildings, have been corrected.
 - (3) That all required inspections that are not addressed by the subsequent scope of work as approved by the department of buildings were performed.
 - (4) That all completed work pursuant to an asbestos abatement permit is in substantial compliance with the approved asbestos abatement permit construction documents.
- G. The general contractor shall provide the final inspection reports to be filed with DEP on A-TR1 form. Records of final inspections made by registered design professionals shall be submitted to DDC as part of the close out document package.
- H. Erect bilingual (English-Spanish) warning signs around the work space and at every point of potential entry from the outside and at main entrance to building which can be viewed by the public without obstruction, in accordance with OSHA 29 CFR 1926.1101 (K) (Sign Specifications) and Title 15, Chapter 1 of RCNY. The warning signs shall be a bright color so that they will be easily noticeable. The size of the sign and the size of the lettering shall be no less than OSHA requirements.
- I. Provide the required labels for all polyethylene bags and all drums utilized to transport contaminated material to the landfill in accordance with OSHA 29 CFR 1926.1101 (K)(2) and by 49 CFR Parts 171 and 172 of the Department of Transportation regulations.
- J. Provide any other signs, labels, warnings, and posted instructions that are necessary to protect, inform and warn people of the hazard from asbestos exposure. Post in a prominent and convenient place for the workers a copy of the latest applicable regulations from OSHA, EPA, NIOSH, State of New York and New York City and any additional items mandated for posting by the aforementioned regulations.



- K. Furnish all permits, variances and notices required to perform the Work.

1.08 EMERGENCY PRECAUTIONS

- A. Establish emergency and fire exits from the Work Area. The clean side of all emergency exits shall be equipped with two full sets of protective clothing and respirators at all times.
- B. Notify local medical emergency personnel, both ambulance crews and hospital emergency room staff prior to commencement of abatement operations as to the possibility of having to handle contaminated or injured workmen, and shall be advised on safe decontamination.
- C. Prepare to administer first aid to injured personnel after decontamination. Seriously injured personnel shall be treated immediately or evacuated immediately for decontamination. When an injury occurs, precautions shall be taken to reduce airborne fiber concentrations (i.e., misting of the air with water) until the injured person has been removed from the Work Area.
- D. Notify, before actual removal of the asbestos material, the local police and fire departments to the danger of entering the Work Area. Asbestos abatement contractor shall make every effort to help these agencies form plans of action should their personnel need to enter the contaminated area.

1.09 SUBMITTALS

- A. Pre-Construction Submittals:
 - 1. Attend a pre-construction meeting scheduled by the City of New York Department of Design and Construction. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project Manager. At this meeting, the asbestos abatement contractor shall present three copies of the following items, bound and indexed. The detailed plan of action must be submitted at least five (5) days prior to the pre-construction meeting.
 - a. Asbestos abatement contractor's scope of work, work plan and schedule.
 - b. Asbestos project notifications, approved variances and plans to Government Agencies.
 - c. Copies of Permits, clearance and licenses if required.



- d. Schedules: the asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. Asbestos abatement contractor shall post a copy of all schedules at the site:
- (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.
 - (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.
 - (4) A schedule of equipment to be used including numbers and types of all major equipment such as HEPA Air Filtration Units, HEPA-vacuums, airless sprayers, Water Atomizing Devices and Type "C" compressors.
- e. A written plan and shop drawings for preparation of work site and decontamination chamber.
- f. Description of protective clothing and approved respirator to be used, make, model, NIOSH approval numbers.
- g. Delineation of responsibility of work site supervision, including competent person, with names, resumes, and home telephone numbers.
- h. Explanation of decontamination sequence and isolation techniques.
- i. Description of specific equipment to be utilized, including make and model number of air filtration devices, vacuums, sprayers, etc.
- j. Description of any prepared methods, procedures, techniques, or equipment other than those specified in the Contract Documents.
- k. Explanation of the handling of asbestos contaminated wastes including EPA and NYCDEP identification numbers of Waste Hauler.



- l. Description of the final clean-up procedures to be used.
- m. Name and qualifications of asbestos abatement contractor's Air Monitor including AIHA accreditation, and proof of NIOSH PAT and NIST/NVLAP Bulk Quality Assurance Proficiency of OSHA samples for approval by the City of New York Department of Design and Construction.
- n. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.
- o. Safety Data Sheets (SDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until SDS are reviewed.
- p. Worker Training and Medical Surveillance: Asbestos abatement contractor shall submit a list of the persons who will be employed by him in the removal work. Present evidence that workers have received proper training required by the regulations and the medical examinations required by OSHA 29 CFR 1926.1101.
- q. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
 - (1) The asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain on title page the project name, name, address and phone number of Environmental Control Representative; name, address and phone number of asbestos abatement contractor; name, address and phone number of asbestos abatement contractor and City's air testing entity; emergency numbers including, but not limited to local Fire/Rescue Department. Log book shall contain a list of personnel approved by the laboratory for entry into the Work Area.



(2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the Asbestos abatement contractor shall submit a copy of the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.

r. Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.

B. Submit copies of the following items to the Construction Project Manager during the work:

1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.
2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
3. Floor plans indicating asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager at weekly progress meetings.
4. All asbestos abatement contractors' air monitoring and inspection results.

C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from asbestos abatement contractor, Sub-asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,



3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.
8. Project Record: The asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall be submitted to DDC as part of the close out documents. The project record shall consist of:
 - a. Copies of licenses of all asbestos abatement contractors involved in the project;
 - b. Copies of DEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
 - c. Copies of all project notifications and reports filed with DEP and NYSDOL for the project, with any amendments or variances;
 - d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
 - e. A copy of the air sampling log and all air sampling results;
 - f. A copy of the abatement asbestos abatement contractor's daily log book;
 - g. All data related to bulk sampling including the results of any asbestos surveys performed by an asbestos investigator;
 - h. Copies of all asbestos waste manifests;
 - i. A copy of all Project Monitor's Reports (ACP-15).



- j. A copy of each ATR-1 Form completed for the asbestos project (if required).
 - k. A copy of each Asbestos Project Conditional Closeout Report (ACP-20).
 - l. A copy of the Asbestos Project Completion Form (ACP-21).
9. The asbestos abatement contractor shall submit one of the following certifications to the DOB, with a copy provided to DDC:
- a. Asbestos Project Completion Form. If an asbestos project has been performed, a copy of the asbestos project completion form issued by DEP shall be submitted to DOB, with a copy being provided to DDC, prior to the issuance of a DOB permit and to any amendment of the underlying construction document approval which increases the scope of the project to include (a) work area(s) not previously covered.
 - b. An Asbestos Project Conditional Close-out Form. If an asbestos project has been performed a copy of the asbestos project conditional close-out form issued by DEP shall be submitted to DOB, with a copy being provided to DDC, prior to the issuance of a DOB permit and to any amendment of the underlying construction document approval which increases the scope of the project to include (a) work area(s) not previously covered.

1.10 QUALITY ASSURANCE

- A. All work required for the completion of this project or called for in this Specification must be executed in a workmanlike manner by using the appropriate methods established by regulatory requirements and/or industrial standards. All workmanship or work methods are subject to review and acceptance by the Construction Project Manager. Throughout the Specification, reference is made to codes and standards which establish qualities, levels or types of workmanship which will be considered acceptable. It is the asbestos abatement contractor's responsibility to comply with these codes and standards during the execution of this work.
- B. All materials and equipment required or consumed during the work of this Contract must meet the minimum acceptable criteria established by codes and standards referenced elsewhere in this Specification. Materials and equipment must be submitted for prior approval as part of the asbestos abatement contractor's "Shop Drawings".



- C. It is the asbestos abatement a contractor's responsibility, when so required by the Specification or upon written request from the Commissioner or his representative to furnish all required proof that workmanship, materials and/or equipment meet or exceed the codes and standards referenced. Such proof shall be in the form requested, typically a certified report or test conducted by a testing entity approved for that purpose by DDC.
- D. The asbestos abatement contractor shall furnish proof that employees working under his supervision have had instruction on the dangers of asbestos exposure, on respirator use, decontamination, and OSHA regulations. This proof shall be in the form of a notarized affidavit to the effect that the above requirements have been satisfied.
- E. The a asbestos abatement contractor will have at all times in his possession and in view at the job site the OSHA regulations 29 CFR 1910.1001, and 1926.1101 Asbestos, and Environmental Protection Agency 40 CFR, Part 61, subpart B: National Emission Standard for asbestos, asbestos stripping, work practices and disposal of asbestos waste. He shall also have one copy of NYC Title 15, Chapter 1 of RCNY and NYS DOL ICR 56 at the job site at all times.
- F. Familiarity with Pertinent Codes and Standards: In procuring all items used in this work, it is the a asbestos abatement contractor's responsibility to verify the detailed requirements of the specifically named codes and standards and to verify that the items procured for use in this work meet or exceed the specified requirements, and are suitable for their intended use.
- G. Rejection of Non Complying Items: The Commissioner reserves the right to reject items incorporated into the work that fail to meet the specified minimum requirements. The Commissioner further reserves the right, and without prejudice to other recourse that maybe taken, to accept non-complying items subject to an adjustment in the Contract amount as approved by the City.
- H. Applicable Regulations, Codes and Standards: Applicable standards listed in these Specifications include, but are not necessarily limited to, standards promulgated by the following agencies and organizations:
 - 1. American National Standards Institute (ANSI)
(Successor to USASI and ASA)
25 West 43rd Street (between 5th and 6th Avenue) 4th Floor
New York, NY 10036
212-642-4900
 - 2. American Society for Testing and Materials (ASTM)
100 Bar Harbor Drive
West Conshohocken, PA 19428-2959
610-832-9500



3. National Institute for Occupational Safety and Health (NIOSH)
Robert A. Taft Laboratory
4676 Columbia Pkwy
Mailstop R12 Cincinnati, Ohio 45226
513-841-4428
4. National Electrical Code (NEC)
See NFPA
5. National Fire Protection Association (NFPA)
1 Batterymarch Park
Quincy, Massachusetts 02169-7471
617-770-3000
6. New York City Fire Department (FDNY)
9 Metrotech Center
Brooklyn, NY 11201-5431
718-999-2117
7. New York City Department of Buildings (NYC DOB)
Enforcement Division
280 Broadway, New York, New York 10007
212- 566-2850
8. New York City Department of Environmental Protection (NYCDEP)
Bureau of Environmental Compliance
Asbestos Control Program
59-17 Junction Boulevard, 8th Floor
Corona, New York 11368
718-595-3682
9. New York City Department of Health and Mental Hygiene (NYC DOHMH)
Environmental Investigation
125 Worth Street
New York, New York 10013
212-442-3372
10. New York State Department of Labor (NYSDOL)
Division of Safety and Health
Engineering Services Unit
State Office Building Campus
Albany, New York 12240-0010



11. New York City Department of Sanitation
125 Worth Street, Room 714
New York, New York 10013
212-566-1066
 12. Occupational Safety and Health Administration (OSHA)
Region II - Regional Office
201 Varick Street, Room 908
New York, New York 10014
212-337-2378
 13. United States Environmental Protection Agency (EPA or USEPA)
Region II
Asbestos NESHAPS Contact
Air and Waste Management Division
(Air Compliance Branch) – USEPA
290 Broadway, 21st Floor
New York, New York 10007-1866
212-637-3660
- I. Post all applicable regulations in a conspicuous place at the job site. Assure that the regulations are not altered, defaced or covered by other materials. One copy of each regulation must also be kept at the Asbestos abatement contractor's office.

1.11 CITY/ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

- A. The normal occupants of the Work Areas will be relocated by the City prior to the performance of the abatement work and returned there to at the conclusion of the abatement work, at no cost to the asbestos abatement contractor. However, the asbestos abatement contractor shall protect all furniture and equipment in the Work Areas in a manner as hereinafter specified. In addition, the asbestos abatement contractor shall perform the work of this Contract in a manner that will be least disruptive to the normal use of the non-Work Areas in the building.
- B. Asbestos abatement contractor shall be responsible for cleaning all portable items not specifically addressed by the Facility, in the Work Areas, or dispose of same as asbestos contaminated waste.
- C. Facility to provide asbestos abatement contractor with a list of items that cannot be removed and need special attention.
- D. Facility to stop all deliveries that may be scheduled to the Work Area while work is in progress.
- E. Facilities to have authorized personnel on site at all times or supply the asbestos abatement contractor with means of contacting such personnel without



unreasonable delay. Such personnel shall have access to all areas, have knowledge of electrical, and air handling equipment. Such personnel shall assist the asbestos abatement contractor in case of any power failure or breakdown to shut down air supply systems, to reset and control all protective systems such as alarms, sprinklers, locks, etc. The Facility shall ensure no active air handling systems are operating within the Work Area.

- F. City will not occupy the portions of the building, in which work is being performed during the entire asbestos removal operation, including completion of clean up.
- G. Asbestos abatement contractor shall provide a plan for 24 hour job security both for prevention of theft and for barring entry of curious but unprotected personnel into Work Areas.
- H. Asbestos abatement contractor shall provide surveillance by a fire watch and set forth procedures to be taken for the safety of building occupants in the event of an emergency, in accordance with the WPSP.
- I. Should the failure of any utility occur, the City will not be responsible to the asbestos abatement contractor for loss of time or any other expense incurred.
- J. Facility will be responsible to notify the asbestos abatement contractor of any planned electrical power shutdowns in order to ensure that there are no power interruptions in the negative air pressure systems.
- K. Asbestos abatement contractor shall remove all flammable materials from the work area and all sources of ignition (including but not limited to pilot lights) shall be extinguished.
- L. Asbestos abatement contractor shall require a competent person (as defined in OSHA 1926.1101) to perform the following functions and to be on-site continuously for the duration of the project:
 - 1. Monitor the set up of the Work Area enclosure and ensure its integrity.
 - 2. Control entry and exit into the work enclosure.
 - 3. Ensure that employees are adequately trained in the use of engineering controls, proper work practices, proper personal protective equipment and in decontamination procedures.
 - 4. Insure that employees use proper engineering controls, proper work practices, proper personal protective equipment and proper decontamination procedures.



5. The competent person (as defined in OSHA1926.1101) shall check for rips and tears in work suits, and ensure that they are mended immediately or replaced.

1.12 USE OF BUILDING FACILITIES

- A. City shall make available to the asbestos abatement contractor, from existing outlets and supplies, all reasonably required amounts of water and electric power at no charge.
- B. Electric power to all Work Areas shall be shut down and locked out except for electrical equipment that must remain in service. Safe temporary power and lighting shall be provided by asbestos abatement contractor in accordance with applicable codes. All power to Work Areas shall be brought in from outside the area through ground-fault interrupter circuits installed at the source. Stationary electrical equipment within the Work Area, which must remain in service, shall be adequately protected, enclosed and ventilated. The Facility will identify all electric lines that must remain in service. Asbestos abatement contractor shall protect all lines.
- C. Asbestos abatement contractor shall provide, at his own expense, all electrical, water, and waste connections, tie-ins, extensions, and construction materials, supplies, etc. All water tie-ins shall be hard piped with polyethylene or copper piping. At the end of each shift, asbestos abatement contractor shall disconnect all hoses within the work zone and place in equipment room of the worker decontamination unit. Asbestos abatement contractor shall ensure positive shutoff of all water to Work Area during non-working hours.
- D. Utilities:
 1. General:

All temporary facilities required to be installed, shall be subject to the approval of the Commissioner. Prior to starting the work at any site; specify clearly the temporary locations of facilities preferably with sketches and submit the same to the Construction Project Manager for approval.
 2. Water:

The Department of Design and Construction will furnish all water needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. All temporary plumbing or adaptations to supply the needs of the Work Area shall be installed and removed by the asbestos abatement contractor and the cost thereof included in the Lump Sum price for abatement work. Shower water for the decontamination unit shall be provided hot. Heating of water, if necessary, shall be provided by the asbestos abatement contractor.



3. Electricity:

The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. All temporary electrical work or adaptations to supply the needs of the Work Area shall be installed and removed by the asbestos abatement contractor and the cost thereof included in the Lump Sum price for abatement work.

In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the Asbestos abatement contractor. However, it is the asbestos abatement contractor's (or the General contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

A dedicated power supply for the negative pressure ventilating units shall be utilized. The negative air equipment shall be on a ground fault circuit interrupter (GFCI) protected circuit separate from the remainder of the work area temporary power circuits.

E. Asbestos abatement contractor shall shut down and lock out all electric power to all work areas except for electrical equipment that must remain in service. Safe temporary power and lighting shall be provided in accordance with all applicable codes. Existing light sources (e.g., house lights) shall not be utilized. All power to work areas shall be brought in from outside the area through ground-fault circuit interrupter at the source.

1. If electrical circuits, machinery, and other electrical systems in or passing through the work area must stay in operation due to health and safety requirements, the following precautions must be taken:

- a. All unprotected cables, except low-voltage (less than 24 volts) communication and control system cables, panel boxes of cables and joints in live conduit that run through the work area shall be covered with three (3) independent layers of six (6) mil fire retardant polyethylene. Each layer shall be individually duct taped and sealed. All three (3) layers of polyethylene sheeting shall be left in place until satisfactory clearance air sampling results have been obtained.
- b. Any energized circuits remaining in the work area shall be posted with a minimum two (2) inch high lettering warning sign which reads: DANGER LIVE ELECTRICAL - KEEP CLEAR. A sign shall be placed on all live covered barriers at a maximum of ten (10) foot



intervals. These signs shall be posted in sufficient numbers to warn all persons authorized to enter the work area of the existence of the energized circuits.

2. Any source of emergency lighting which is temporarily blocked as a result of work place preparation shall be replaced for the duration of the project by battery operated or temporary exit signs, exit lights, or photo luminescent path markings.
- F. Asbestos abatement contractor shall provide a separate temporary electric panel board to power asbestos abatement contractor's equipment. The Facility will designate an existing electrical source in proximity to the Work Area. Asbestos abatement contractor's licensed electrician shall provide temporary tie-in via cable, outlet boxes, junction boxes, receptacles and lights, all with ground fault interruption. At no time shall extension cords greater than 50-feet in length be allowed. All temporary electrical installation shall be in accordance with OSHA regulations. The electric shut down for power panel tie-in will be on off-hours and must be coordinated with the Facility. Asbestos abatement contractor shall provide to the City a specification and drawing outlining his power requirements at the pre-construction meeting.
- G. Additional electrical equipment (i.e., transformers, etc.), which is necessary due to the lack of existing power on the floor, shall be at the asbestos abatement contractor's expense.
- H. Asbestos abatement contractor shall provide fire protection in accordance with all State and Local fire codes.
- I. Sprinklers, standpipes, and other fire suppression systems shall remain in service and shall not be plasticized.
- J. When temporary service lines are no longer required, they shall be removed by the asbestos abatement contractor. Any parts of the permanent service lines, grounds and buildings, disturbed or damaged by the installation and/or removal of the temporary service lines, shall be restored to their original condition by the asbestos abatement contractor. Senior Stationary Engineer will inspect and test all switches, controls, gauges, etc. and shall submit a list to the Construction Project Manager of any equipment damaged by the asbestos abatement contractor.
- K. Asbestos abatement contractor shall supply hot shower water necessary for use in the decontamination unit.

1.13 USE OF THE PREMISES

- A. Asbestos abatement contractor shall confine his apparatus, the storage of materials, and supplies, and the operation of his workmen to limits established by law,



ordinances, and the directions of the Construction Project Manager and the Facility. All flammable or combustible materials shall be properly stored to obviate fire and in areas approved by the Facility.

- B. Asbestos abatement contractor shall assure that no exits from the building are obstructed, that appropriate safety barriers are established to prevent access, and that Work Areas are kept neat, clean, and safe.
- C. Asbestos abatement contractor shall maintain exits from the work area or alternative exits shall be established, in accordance with section 1027 of the New York City Fire Code. Exits shall be checked at the beginning and end of each work shift against blockage or impediments to exiting.
- D. If the openings of temporary structural partitions related to abatement work areas block egress, the partition shall consist of two sheets of fire retardant 6-mil plastic, prominently marked as an exit with photo luminescent paint or signage. Cutting tools (e.g., knife, razor) shall be attached to the work area side of the sheeting for use in the event that the barrier must be cut open to allow egress.
- E. All surrounding work, fixtures, soil lines, drains, water lines, gas pipes, electrical conduit, wires, utilities, duct work railings, shrubbery, landscaping, etc. which are to remain in place shall be carefully protected and, if disturbed or damaged, shall be repaired or replaced as directed by the City, at no additional cost.
- F. All routes through the building to be used by the asbestos abatement contractor shall first be approved by the Construction Project Manager and the Facility.
- G. Attention is specifically drawn to the fact that other asbestos abatement contractors, performing the work of other Contracts, may be (or are) brought upon any of the work sites of this Contract. Therefore, the asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other asbestos abatement contractors who may be on (or are on) any site of the work of this Contract. Regulated area exempted.
- H. Temporary toilet facilities must be provided by the asbestos abatement contractor on the site. Coordinate location of facilities with Construction Project Manager. No toilet facilities will be allowed in the Work Area.

1.14 PROTECTION AND DAMAGE

- A. The asbestos abatement contractor is responsible to cover all furniture and equipment that cannot be removed from Work Areas. Moveable furniture and equipment will be removed from Work Areas by asbestos abatement contractor prior to start of work and returned upon successful completion of the final air testing. At the conclusion of the work (after clearance level of air testing reaches



the acceptable limit), the asbestos abatement contractor will remove all plastic covering from the walls, floors, furniture, equipment and reinstall furniture and equipment in the cleaned Work Area. The asbestos abatement contractor shall remove all shades, curtains and drapes from the Work Area, and reinstall the same following the final clean up.

- B. Prior to plasticizing, the proposed work areas shall be pre-cleaned using HEPA filtered vacuum equipment and/or wet cleaning methods. Methods that raise dust, such as sweeping or vacuuming with equipment not equipped with HEPA filters, are prohibited.
- C. Use rubber tired vehicles that use non-volatile fuels for conveying material inside building and provide temporary covering, as necessary, to protect floors.
- D. No materials or debris shall be thrown from windows or doors of the building. Building waste system shall NOT be used to remove refuse.
- E. Debris shall be removed from the work site daily. Premises shall be left neat and clean after each work shift, so that work may proceed the next regular workday without interruption. Limited bag storage may take place within the Work Area when approved by the Construction Project Manager.
- F. Protect floors and walls along removal routes from damage, wear and staining with contamination control flooring. All finished surfaces to be protected with Masonite or other rigid sheathing material.
- G. A preliminary inspection for pre-existing damage shall be conducted by asbestos abatement contractor and representative of the City before commencement of the project.

1.15 RESPIRATORY PROTECTION REQUIREMENTS

- A. Respiratory protection shall be worn by all individuals who may be exposed to asbestos fibers from the initiation of the asbestos project until all areas have successfully passed clearance air monitoring in accordance with Regulations and these Specifications.
- B. Asbestos abatement contractor shall develop and implement a written respiratory protection program with required site-specific procedures and elements. The program shall be administered by a properly trained individual. The written respiratory protection program shall include the requirements set forth in OSHA Standard 29 CFR 1910.134, at a minimum.
- C. The Asbestos abatement contractor shall provide workers with individually issued and marked respiratory equipment. Respiratory equipment shall be suitable for the asbestos exposure level(s) in the Work Area(s), as specified in OSHA Standards 26



CFR 1910.134 and 29 CFR 1926.1101, NIOSH Standard 42 CFR 84, or as more stringently specified otherwise, herein.

- D. Where respirators with disposable filter parts are employed, the asbestos abatement contractor will provide sufficient filter parts for replacement as necessary or as required by the applicable regulation.
- E. All respiratory protection shall be NIOSH approved. All respiratory protection shall be provided by asbestos abatement contractor, and used by workers in conjunction with the written respiratory protection program.
- F. Asbestos abatement contractor shall provide respirators selected by an Industrial Hygienist that meet the following requirements:

Table 1. -- Assigned Protection Factors⁵

Type of Respirator ^{1,2}	Half mask	Full facepiece	Helmet/hood
1. Air-Purifying Respirator	³ 10	50
2. Powered Air-Purifying Respirator (PAPR)	50	1,000	⁴ 25/1,000
3. Supplied-Air Respirator (SAR) or Airline Respirator			
• Demand mode	10	50
• Continuous flow mode	50	1,000	⁴ 25/1,000
• Pressure-demand or other positive-pressure mode	50	1,000
4. Self-Contained Breathing Apparatus (SCBA)			
• Demand mode	10	50	50
• Pressure-demand or other positive-pressure mode (e.g., open/closed circuit)	10,000	10,000

Notes:

¹Employers may select respirators assigned for use in higher workplace concentrations of a hazardous substance for use at lower concentrations of that substance, or when required respirator use is independent of concentration.

²The assigned protection factors in Table 1 are only effective when the employer implements a continuing, effective respirator program as required by this section (29 CFR 1910.134), including training, fit testing, maintenance, and use requirements.

³This APF category includes filtering facepieces, and half masks with elastomeric facepieces.



⁴The employer must have evidence provided by the respirator manufacturer that testing of these respirators demonstrates performance at a level of protection of 1,000 or greater to receive an APF of 1,000. This level of performance can best be demonstrated by performing a WPF or SWPF study or equivalent testing. Absent such testing, all other PAPRs and SARs with helmets/hoods are to be treated as loose-fitting facepiece respirators, and receive an APF of 25.

⁵These APFs do not apply to respirators used solely for escape. For escape respirators used in association with specific substances covered by 29 CFR 1910 subpart Z, employers must refer to the appropriate substance-specific standards in that subpart. Escape respirators for other IDLH atmospheres are specified by 29 CFR 1910.134 (d)(2)(ii).

G. Selection of high efficiency filters:

1. All high efficiency filters shall have a nominal efficiency rating of 100 (99.97-percent effective) when tested against 0.3-micrometer monodisperse diethyl-hexyl phthalate (DOP) particles.
2. Choose N-, R-, or P-series filters based upon the presence or absence of oil particles.
 - a. N-series filters shall only be used for non-oil solid and water based aerosols or fumes.
 - b. R- and P-series filters shall be used when oil aerosols or fumes (i.e., lubricants, cutting fluids, glycerin, etc.) are present. The R-series filters are oil resistant and the P-series filters are oil proof.
 - c. Follow filter manufacture recommendations.
3. If a vapor hazard exists, use an organic vapor cartridge in combination with the high efficiency filter.

H. Historical airborne fiber level data may serve as the basis for selection of the level of respiratory protection to be used for an abatement task. Historical data provided by the asbestos abatement contractor shall be based on personal air monitoring performed during work operations closely resembling the processes, type of material, control methods, work practices, and environmental conditions present at the site. Documentation of aforementioned results may be requested by the City and/or Third-Party Air Monitor for review. This will not relieve the asbestos abatement contractor from providing personal air monitoring to determine the time-weighted average (TWA) for the work under contract. The TWA shall be determined in accordance with 29 CFR 1926.1101.

I. At no time during actual removal operations shall half-mask air purifying respirators be allowed unless a full 8-hour TWA and excursion limit have been conducted, and reviewed by the Construction Project Manager. If the TWA and



excursion limit have not been conducted, a Supplied-Air Respirator (SAR) or Airline Respirator or Self-Contained Breathing Apparatus (SCBA) must be used. Use of single use dust respirators is prohibited for the above respiratory protection.

- J. Workers shall be provided with personally issued and individually marked respirators. Respirators shall not be marked with any equipment that will alter the fit of the respirator in any way. Only waterproof identification markers shall be used.
- K. Asbestos abatement contractor shall ensure that the workers are qualitatively or quantitatively fit tested by an Industrial Hygienist initially and every 12 months thereafter with the type of respirator he/she will be using.
- L. Whenever the respirator design permits, workers shall perform the positive and negative air pressure fit test each time a respirator is worn. Powered air-purifying respirators shall be tested for adequate flow as specified by the manufacturer.
- M. No facial hairs (beards) shall be permitted to be worn when wearing respiratory protection that requires a mask-to-face seal.
- N. If a worker wears glasses, a spectacle kit to fit their respirator shall be provided by the asbestos abatement contractor at the asbestos abatement contractor's expense.
- O. Respiratory protection maintenance and decontamination procedures shall meet the following requirements:
 - 1. Respiratory protection shall be inspected and decontaminated on a daily basis in accordance with OSHA 29 CFR 1910.134 (b); and
 - 2. High efficiency filters for negative pressure respirators shall be changed after each shower; and
 - 3. Respiratory protection shall be the last piece of worker protection equipment to be removed. Workers must wear respirators in the shower when going through decontamination procedures as stated in Section 3.03 and/or 3.04.
 - 4. Airline respirators with high efficiency filtered disconnect shall be disconnected in the equipment room and worn into the shower. Powered air-purifying respirator face pieces shall be worn into the shower. Filtered/power pack assemblies shall be decontaminated in accordance with manufacturers recommendations; and
 - 5. Respirators shall be stored in a dry place and in such a manner that the face-piece and exhalation valves are not distorted; and
 - 6. Organic solvents shall not be used for washing of respirators.

- P. Authorized visitors shall be provided with suitable respirators and instruction on the proper use of respirators whenever entering the Work Area. Qualitative fit test shall be done to ensure proper fit of respirator.

1.16 PROTECTIVE CLOTHING

- A. Provide worker protection as required by the most stringent OSHA and/or EPA standards applicable to the work. Provide to all workers, foremen, superintendents, authorized visitors and inspectors, protective disposable clothing consisting of full body coveralls, head covers, gloves and 18-inch high boot type covers or reusable footwear.
- B. In addition to personal protective equipment for workers, the asbestos abatement contractor shall make available at each worksite at least four (4) additional uniforms and required respiratory equipment each day for personnel who are authorized to inspect the work site. He/she shall also provide, for the duration of the work at any site involving a decontamination unit for worksite access, a lockable storage locker for use by the Construction Project Manager. In addition to respiratory masks for workers, the asbestos abatement contractor must have on hand at the beginning of each work day, at least four (4) masks each with two sets of fresh filters, for use by personnel who are authorized to inspect the worksite. The asbestos abatement contractor shall check for proper fit of the respirators of all City personnel authorized to enter the Work Area.
- C. Asbestos handlers involved in tent procedures shall wear two (2) disposable suits, including gloves, hood and footwear, and appropriate respiratory equipment. All street clothes shall be removed and stored in a clean room within the work site. The double layer personal protective equipment shall be used for installation of the tent and throughout the procedure, if a decontamination unit (with shower and clean room) is contiguous to the Work Area, only one (1) layer of disposable personal protective equipment shall be required; in this case, prior to exiting the tent the worker shall HEPA vacuum and wet clean the disposable suit.
- D. The outer disposable suit (if 2 suits are worn) shall be removed and remain in the tent upon exiting. Following the tent disposal and work site clean up the workers shall immediately proceed to a shower at the work site. The inner disposal unit and respirator shall be removed in the shower after appropriate wetting. The disposal clothing shall be disposed of as asbestos-containing waste material. The workers shall then fully and vigorously shower with supplied liquid bath soap, shampoo, and clean dry towels.
- E. Coveralls: provide disposable full-body coveralls and disposable head covers. Require that they be worn by all workers in the Work Area. Provide a sufficient number for all required changes for all workers in the Work Area.



- F. Boots: provide work boots with non-skid soles, and where required by OSHA, foot protection, for all workers. Provide boots at no cost to workers. Paint uppers of all boots yellow with waterproof enamel. Do not allow boots to be removed from the Work Area for any reason after being contaminated with ACM and/or dust.
- G. Hard Hats: provide hard hats as required by OSHA for all workers, and provide a minimum of four spares for Inspectors, visitors, etc. Label all hats with same warning label as used on disposal bags. Require hard hats to be worn at all times that work is in progress that may cause potential head injury. Provide hard hats of the type with polyethylene strap suspension. Require hats to remain in the Work Area throughout the work. Thoroughly clean and decontaminate and bag hard hats prior to removing them from the Work Area at the end of the work.
- H. Goggles: provide eye protection (goggles) as required by OSHA for all workers involved in any activity that may potentially cause eye injury. Require them to be worn at all times during these activities. Thoroughly clean and decontaminate goggles before removing them from the Work Area.
- I. Gloves: provide work gloves to all workers, of the type dictated by the Work and OSHA Standards. Do not remove gloves from the Work Area. Dispose of as asbestos-asbestos contaminated waste at the end of the work. Gloves shall be worn at all times, except during Work Area Preparation activities that do not disturb ACM.
- J. Reusable footwear, hard hats and eye protection devices shall be left in the contaminated Equipment Room until the end of the Asbestos Abatement Work.
- K. Disposable protective clothing shall be discarded and disposed of as asbestos waste every time the wearer exits from the workspace to the outside through the decontamination facility.
- L. Respirators, disposable coveralls, head covers and foot covers shall be provided by the asbestos abatement contractor for the Facilities Representative, Construction Project Manager and any other authorized representative who may inspect the Work Area. Provide two respirators and six respirator filter changes per day.

1.17 AIR MONITORING - ASBESTOS ABATEMENT CONTRACTOR

- A. Asbestos abatement contractor shall employ a qualified industrial hygiene laboratory to analyze air samples in accordance with OSHA Regulations, 1926.1101 (Asbestos Standards for Construction) and New York City regulations.
- B. The industrial hygiene laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory identification number shall be submitted and approved by the City. The laboratory



shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).

- C. Industrial hygiene laboratory shall also be a current proficient participant in the NIST/NVLAP Quality Assurance Program for the identification of bulk samples. Laboratory identification number shall be submitted to and approved by the City.
- D. Air monitoring responsibilities for the asbestos abatement contractor's employees, shall be performed by a representative of the industrial hygiene laboratory retained by the asbestos abatement contractor.
- E. Asbestos abatement contractor shall submit to the City all credentials of the designated (as defined in OSHA 1926.1101) and industrial hygiene laboratory representative for approval.
- F. Air monitoring and inspection shall be conducted by the Asbestos abatement contractor's competent person (as defined in OSHA 1926.1101).
- G. Continuous (daily or per shift) monitoring and inspection will include Work Area samples, personnel samples from the breathing zone of a worker to accurately determine the employees' 8-hour TWA (unless Type C respirators are used) and decontamination unit clean room samples.
- H. Work Area samples and employee personnel samples shall be taken using pumps whose flow rates can be determined to an accuracy of +5-percent, at a minimum of two liters per minute. This must be demonstrated at the job site.
- I. Sampling and analysis methods shall be per NIOSH 7400A.
- J. Test Reports:
 - 1. Promptly process and distribute one copy of the test results, to the Commissioner.
 - 2. Prompt reports are necessary so that if required, modifications to work methods and/or practices may be implemented as soon as possible.
 - 3. Asbestos abatement contractor shall by facsimile notify the Commissioner within 24 hours of the results of each test, followed by written notification within three days.
- K. Competent person shall conduct inspections and provide written reports daily. Inspections will include checking the standard operating procedures, engineering control systems, respiratory protection and decontamination systems, packaging and disposal of asbestos waste, and any other aspects of the project which may affect the health and safety of the people and environment.



- L. All costs for required air monitoring by the asbestos abatement contractor's competent person shall be borne by the asbestos abatement contractor.
- M. The City reserves the right to conduct air and surface dust sampling in conjunction with and separate from the Third-Party Air Monitor for the purposes of Quality Assurance.
- N. All samples shall be accompanied by a Chain of Custody Record that shall be submitted to the Construction Project Manager upon completion of analysis.

1.18 THIRD PARTY MONITORING AND LABORATORY

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM). This laboratory shall meet the standards stated in Paragraph 1.17. B.
- C. Observations will include, but not be limited to, checking the standard operating procedures, engineering control systems, respiratory protection, decontamination systems, packaging and disposal of asbestos waste, and any other aspects of the project that may affect the health and safety of the environment, Asbestos abatement contractor, and/or facility occupants.
- D. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.
- E. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the Asbestos abatement contractor.
- F. At a minimum, air sampling shall be conducted in accordance with the following schedule:

Abatement Activity	Pre-Abatement	During Abatement	Post-Abatement
Equal to or greater than 10,000 square feet or 10,000 linear feet of ACM	PCM	PCM	TEM



Abatement Activity	Pre-Abatement	During Abatement	Post-Abatement
Less than 10,000 square feet or 10,000 linear feet of ACM	PCM	PCM	PCM

Note: TEM is acceptable wherever PCM is required.

G. The number of air samples required per stage of abatement and size of abatement project is listed in the table below:

		Pre-Abatement	During Abatement	Post Abatement
Large Asbestos Projects				
1.	Full Containment	10	5	10
2.	Glovebag inside Tent	5 ^a	5 ^a	5 ^a
3.	Exterior Foam and Vertical Surfaces	-	5 ^c	5 ^d
4.	Interior Foam	10	5 ^c	10 ^d
Small Asbestos Projects				
1.	Full Containment	6	3	6
2.	Glovebag inside Tent	3 ^b	3 ^b	3 ^b
3.	Tent	3 ^b	3 ^b	3 ^b
4.	Exterior Foam and Vertical Surfaces	-	3 ^c	3 ^d
5.	Interior Foam	6	3 ^c	6 ^d
Minor Projects				
1.	Glovebag inside Tent	-	-	1 ^d
2.	Tent	-	-	1 ^d
3.	Exterior Foam and Vertical Surfaces	-	-	1 ^d
4.	Interior Foam	-	-	1 ^d

Notes:

- a. if more than three (3) tents then two (2) samples required per enclosure.
- b. if more than three (3) tents then one (1) sample required per enclosure.
- c. samples shall be taken within the work area(s).
- d. area sampling is required only if:
 - visible emissions are detected during the project
 - during-abatement area sampling results exceeded 0.01 f/cc or the pre-abatement area sampling result(s) for interior projects where applicable.
 - work area to be reoccupied is an interior space at a school, healthcare, or daycare facility.



- H. Prior to commencement of abatement activities, the Third Party Air Monitoring Firm will collect a minimum number of area samples inside each homogeneous work area.
1. Samples will be taken during normal occupancy activities and circumstances at the work site.
 2. Samplers shall be located within the proposed work area and at all proposed isolation barrier locations.
 3. Samples shall be analyzed using PCM.
 4. The number of samples to be collected will be determined by the size of the project and the abatement methods to be utilized.
- I. Frequency and duration of the air sampling during abatement shall be representative of the actual conditions during the abatement. The size of the asbestos project will be a factor in the number of samples required to monitor the abatement activities. The following minimum schedule of samples shall be required daily.
1. For large asbestos projects employing full containment, area air sampling shall be performed at the following locations:
 - a. Two area samples outside the work area in uncontaminated areas of the building, remote from the decontamination facilities.
 - (1) Primary location selection shall be within 10 feet of isolation barriers.
 - (2) Where negative ventilation exhaust runs through uncontaminated building areas, one of the area samples will be required in these areas to monitor any potential fiber release.
 - (3) Where exhaust tubes have been grouped together in banks of up to five (5) tubes, with each tube exhausting separately and the bank of tubes terminating together at the same controlled area, one area air sample shall be taken.
 - b. One area sample within the uncontaminated entrance to each decontamination enclosure system.
 - c. Where adjacent non-work areas do not exist, an exterior area sample shall be taken.



- d. One area sample within 5 feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors but not within a duct.
 - e. One area sample outside, but within 25 feet of, the building or structure, if the entire building or structure is the work area.
2. For large asbestos projects involving interior foam method, area air sampling shall be performed at the following sampling locations:
- a. One area sample taken outside the work area within 10 feet of isolation barriers.
 - b. One area sample taken within the uncontaminated entrance to each worker decontamination and waste decontamination enclosure system.
 - c. One area sample within 5 feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors but not within a duct, if applicable.
 - d. Three area samples inside the work area.
 - e. One area sample where the negative ventilation exhaust ducting runs through uncontaminated building areas, if applicable.
3. For large asbestos projects employing the glovebag procedure within a tent, a minimum of five continuous air samples shall be taken concurrently with the abatement for each work area, unless there are more than three enclosures, in which case two area samples per enclosure are required.
- a. Four area samples taken outside the work area within ten feet of tent enclosure(s).
 - b. One area sample taken within the uncontaminated entrance to each worker and waste decontamination enclosure system.
 - c. One area sample within five feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors, but not within a duct, if applicable.
 - d. One area sample where negative ventilation exhaust ducting runs through uncontaminated building areas, if applicable.
4. For large asbestos projects involving exterior foam method or removal of ACM from vertical surfaces, a minimum of five continuous area samples



shall be taken concurrently with the abatement for each work area using the following minimum requirements:

- a. Three area samples inside the work area and remote from the decontamination systems.
 - b. One area sample within the uncontaminated entrance to each worker and waste decontamination enclosure system.
 - c. One area sample outside the work area within 25 feet of the building or structure, if the entire building or structure is the work area.
 - d. One area sample inside the building or structure at the egress point to the work area, if applicable.
5. For small asbestos projects employing full containment, a minimum of three continuous area samples shall be taken concurrently with the abatement for each work area at the following locations:
- a. Two area samples taken outside the work area within ten feet of the isolation barriers.
 - b. One area sample within the uncontaminated entrance to each worker or waste decontamination enclosure system.
 - c. One area sample within five feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors, but not within a duct, if applicable.
 - d. One area sample where negative ventilation exhaust ducting runs through an uncontaminated building area, if applicable.
6. Tent Procedures:
For projects involving more than 25 linear feet or 10 square feet, a minimum of three continuous samples shall be taken concurrently throughout abatement.
- J. Post-abatement clearance air monitoring for projects not solely employing glove-bag procedures shall include a minimum number of area samples inside each homogeneous work area and outside each homogeneous work area (five samples inside/five samples outside for Large Projects and three samples inside/three samples outside for Small Projects). In addition to the five sample inside/five sample outside minimum for Large Projects, one additional representative area sample shall be collected inside and outside the work area for every 5,000 square feet above 25,000 square feet of floor space where ACM has been abated.



- K. Post-abatement clearance air monitoring for Small Projects solely employing glove-bag procedures is not required unless one or more of the following events occurs. In such cases, post-abatement clearance air monitoring procedures shall be followed. The events requiring post-abatement clearance air monitoring are:
1. The integrity of the glove-bag was compromised,
 2. Visible emissions are detected outside the glove-bag, and/or
 3. Ambient levels exceed 0.01 f/cc during abatement.
- L. Monitoring requirements for other than post-abatement clearance air monitoring are as follows:
1. The sampling zone for indoor air samples shall be representative of the building occupants' breathing zone.
 2. If possible, outdoor ambient and baseline samplers should be placed about 6 feet above the ground surface in reasonable proximity to the building and away from obstructions and drafts that may unduly affect airflow.
 3. For outdoor samples, if access to electricity and concerns about security dictate a rooftop site, locations near vents and other structures on the roof that would unduly affect airflow shall be avoided.
 4. Air sampling equipment shall not be placed in corners of rooms or near obstructions such as furniture.
 5. Samples shall have a chain of custody record.
- M. Area air sampling during abatement shall be conducted as specified in the following documents except as restricted or modified herein:
1. Measuring Airborne Asbestos Following an Abatement Action, US EPA document 600/4-85-049 (Nov., 1985);
 2. Guidance for Controlling Asbestos-Containing Materials in Buildings; US EPA Publication 560/5-85- 024 (June, 1984);
 3. Methodology for the Measurement of Airborne Asbestos by Electron Microscopy US EPA Contract No. 68-02- 3266;
 4. Mandatory and non-mandatory Electron Microscopy Methods set forth in 40 CFR Part 763, Subpart E, Appendix A.
 5. NIOSH 7400 method using "A" counting rules



- N. In accordance with the above criteria, area samples (see NYCDEP Asbestos Control Program Regulations) shall conform to the following schedule:

Area Samples for Analysis by	Minimum Volume	Flow Rate
PCM, 25mm cassettes	560 liters	5 to 15 liters/minute
TEM, 25mm cassettes	560 liters	1 to 10 liters/minute
TEM, 37mm cassettes	1,250 liters	1 to 10 liters/minute

O.

- O. Post-abatement clearance air monitoring requirements are as follows:

1. Sampling shall not begin until at least one hour after wet cleaning has been completed and no visible pools of water or condensation remain.
2. Samplers shall be placed at random around the work area. If the work area contains the number of rooms equivalent to the number of required samples based on floor area, a sampler shall be placed in each room. When the number of rooms is greater than the required number of samples, a representative sample of rooms shall be selected.
3. The representative samplers placed outside the work area but within the building shall be located to avoid any air that might escape through the isolation barriers and shall be approximately 50 feet from the entrance to the work area, and 25 feet from the isolation barriers.

- P. The following aggressive sampling procedures shall be used within the work area during all clearance air monitoring:

1. Before starting the sampling pumps, use forced air equipment (such as a one horsepower leaf blower) to direct exhaust air against all walls, ceilings, floors, ledges and other surfaces in the work area. This pre-sampling procedure shall take at least five minutes per 1,000 square feet of floor area; then
2. Place a 20-inch diameter fan in the center of the room. Use one fan per 10,000 cubic feet of room space. Place the fan on slow speed and point it toward the ceiling.
3. Start the sampling pumps and sample for the required time or volume.
4. Turn off the pump and then the fan(s) when sampling is completed.
5. Collect a minimum number of area samples inside and outside each homogeneous work area (five inside/five outside samples for Large Projects and three inside/three outside samples for Small Projects). In addition to the minimum for Large Projects, one representative area samples shall be



collected inside and outside the work area for every 5,000 square feet above 25,000 square feet of floor space where ACM has been abated.

Q. For post-abatement monitoring, area samples shall conform to the following schedule:

Area Samples for Analysis by	Minimum Volume	Flow Rate
PCM	1,800 liters	5 to 15 liters/minute
TEM	1,250 liters	1 to 10 liters/minute

1. Each homogeneous work area that does not meet the clearance criteria shall be thoroughly re-cleaned using wet methods, with the negative pressure ventilation system in operation. New samples shall be collected in the work area as described above. The process shall be repeated until the work site meets the clearance criteria.
2. For an asbestos project with more than one homogeneous work area, the release criterion shall be applied independently to each work area.
3. Should airborne fiber concentrations exceed the clearance criteria, the asbestos abatement contractor shall re-clean the work area utilizing wet wiping and HEPA-vacuuming techniques. Following completion of re-cleaning activities, the Third-Party Air Monitor will perform an observation of the Work Area. If the Third-Party Air Monitor determines that the work was performed in accordance with the specifications, the appropriate settling period will be observed and additional air sampling will be performed.
4. All costs resulting from additional air tests and observations shall be borne by the asbestos abatement contractor. These costs may include, but are not limited to, labor, analysis fees, materials, and expenses.
5. After the area has been found to be in compliance, the asbestos abatement contractor may remove Isolation Barriers and perform final cleaning as specified.

R. Clearance and/or Re-occupancy Criteria:

1. The clearance criteria shall be applied to each homogeneous work area independently.
2. For PCM analysis, the clearance air monitoring shall be considered satisfactory when each of the 5 inside/5 outside samples for Large Projects and/or 3 inside/3 outside samples for Small Projects is less than or equal to 0.01 f/cc or the background concentrations, whichever is greater.



3. For TEM analysis, the clearance air monitoring shall be considered satisfactory when the requirements stated in 40 CFR Part 763, Subpart E, Appendix A, Section IV are met.
4. As soon as the air monitoring tests are completed, the Third-Party Air Monitor will send the results of such tests to the City and notify the Asbestos abatement contractor.
5. The asbestos abatement contractor shall initiate the appropriate closeout information into the DEP ARTS database within 24 hours of work area completion to allow the Third Party Air Monitoring Firm to complete and submit the ACP-15 forms for each specific work area.
6. The asbestos abatement contractor shall provide the ACP-20 and ACP-21 forms to the Third Party Air Monitoring Firm within 48 hours of receipt.

1.19 TAMPERING WITH TEST EQUIPMENT

All parties to this Contract are hereby notified that any tampering with testing equipment will be considered an attempt at falsifying reports and records to federal and state agencies and each offense will be prosecuted under applicable state and federal criminal codes to the fullest extent possible.

1.20 GUARANTEE

- A. Work performed in compliance with this Contract shall be guaranteed for a period of one year from the date the completed work is accepted by the City.
- B. The asbestos abatement contractor shall not be held liable for the guarantee where the repair required under the guarantee is a result of obvious abuse or vandalism, as determined by the Commissioner.
- C. The City will notify the asbestos abatement contractor in writing regarding defects in work under the guarantee.

PART 2 – PRODUCTS

2.01 MATERIAL HANDLING

- A. Deliver all materials to the job site in their manufacturer's original container, with the manufacturer's label intact and legible.
 1. Maintain packaged materials with seals unbroken and labels intact until time of use.



2. Store all materials on pallets, away from any damp and/or wet surface. Cover materials in order to prevent damage and/or contamination.
 3. Promptly remove damaged materials and unsuitable items from the job site, and promptly replace with material meeting the specified requirements, at no additional cost to the City.
- B. The Construction Project Manager may reject as non-complying such material and products that do not bear identification satisfactory to the Construction Project Manager as to manufacturer, grade, quality and other pertinent information.

2.02 MATERIALS

- A. Wetting agents: (Surfactant) shall consist of resin materials in a water base, which have been tested to ensure materials are non-toxic and non-hazardous. Surfactants shall be installed according to the manufacturer's written instructions.
- B. Encapsulants: Liquid material which can be applied to asbestos-containing material which temporarily controls the possible release of asbestos fibers from the material or surface either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the material and binding its components together (penetrating encapsulant). A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.
- C. During abatement activities, replacement materials shall be stored outside the work area in a manner to prevent contamination. Materials required for the asbestos project (i.e., plastic sheeting, replacement filters, duct tape, etc.) shall be stored to prevent damage or contamination.
- D. Framing Materials and Doors: As required to construct temporary decontamination facilities and isolation barriers. Lumber shall be high grade, new, finished one side and fire retardant.
- E. Fire Retardant Polyethylene Sheeting: minimum uniform thickness of 6-mil. Provide largest size possible to minimize seams. All materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.
- F. Fire Retardant Reinforced Polyethylene Sheeting: For covering floor of decontamination units, provide translucent, nylon reinforced or woven polyethylene laminated, fire retardant polyethylene sheeting. Provide largest size possible to minimize seams, minimum uniform thickness 6-mil. All materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.



- G. Drums: Asbestos-transporting drums, sealable and clearly marked with warning labels as required by OSHA and EPA.
- H. Polyethylene Disposal Bags: Asbestos disposal bags, minimum of fire retardant 6-mil thick. Bags shall be clearly marked with warning labels as required by OSHA and EPA.
- I. Signs: Asbestos warning signs for posting at perimeter of Work Area, as required by OSHA and EPA.
- J. Waste Container Bag Liners and Flexible Trailer Trays: One piece leak-resistant flexible tray with absorbent pad.
- K. Tape: Provide tape which is of high quality with an adhesive that is formulated to aggressively stick to sheet polyethylene.
- L. Spray Adhesive: Provide spray adhesive in aerosol cans which is specifically formulated to stick tenaciously to sheet polyethylene.
- M. Flexible Duct: Spiral reinforced flex duct for air filtration devices.
- N. Protective Clothing: Workers shall be provided with sufficient sets of properly fitting, full-body, disposable coveralls, head covers, gloves, and 18-inch high boot-type foot covers. Protective clothing shall conform to OSHA Standard 29 CFR 1926.1101.
- O. Surfactants, strippers, sealers, or any other chemicals used shall be non-carcinogenic and non-toxic.
- P. Materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.

2.03 TOOLS AND EQUIPMENT

- A. Air Filtration Device (AFD): AFDs shall be equipped with High Efficiency Particulate Air (HEPA) filtration systems and shall be approved by and listed with Underwriter's Laboratory.
- B. Scaffolding: All scaffolding shall be designed and constructed in accordance with OSHA (29 CFR 1926/1910), New York City Building Code, and any other applicable federal, state and local government regulations. Whenever there is a conflict or overlap of the above references the most stringent provisions are applicable. All scaffolding and components shall be capable of supporting without failure a minimum of four times the maximum intended load, plus an allowance for impact. All scaffolding and staging must be certified in writing by a Professional Engineer licensed to practice in the State of New York.



1. Equip rungs of all metal ladders, etc., with an abrasive, non-slip surface.
 2. Provide non-skid surface on all scaffold surfaces subject to foot traffic. Scaffold ends and joints shall be sealed with tape to prevent penetration of asbestos fibers.
- C. **Transportation Equipment:** Transportation Equipment, as required, shall be suitable for loading, temporary storage, transit and unloading of asbestos contaminated waste without exposure to persons or property. Any temporary storage containers positioned outside the building for temporary storage shall be metal, closed and locked.
- D. **Vacuum Equipment:** All vacuum equipment utilized in the Work Area shall utilize HEPA filtration systems.
- E. **Vacuum Attachments:** Soft Brush Attachment, Asbestos Scraper Tool, Drill Dust Control Kit.
- F. **Electric Sprayer:** An electric airless sprayer suitable for application of encapsulating material and shall be approved by and listed with Underwriters Laboratory.
- G. **Water Sprayer:** The water sprayer shall be an airless or other low-pressure sprayer for amended water application.
- H. **Water Atomizer:** Powered air-misting device equipped with a ground fault interrupter and equipped to operate continuously.
- I. **Brushes:** All brushes shall have nylon bristles. Wire brushes are excluded from use due to their potential to shred asbestos fibers into small, fine fibers. Wire brushes maybe used for cleaning pipe joints within glove-bags upon written approval of the Construction Project Manager.
- J. **Power tools used to drill, cut into, or otherwise disturb ACM shall be manufacturer-equipped with HEPA filtered local exhaust ventilation. Abrasive removal methods, including the use of beadblasters, are prohibited.**
- K. **Other Tools and Equipment:** Asbestos abatement contractor shall provide other suitable tools for the stripping, removal, encapsulation, and disposal activities including but not limited to: hand-held scrapers, sponges, rounded-edge shovels, brooms, and carts.
- L. **Fans and Leaf Blower:** Provide Leaf Blower (one leaf blower per floor) and one 20-inch diameter fans for each 10,000 cubic feet of Work Area volume to be used for aggressive sampling technique for clearance air testing.



- M. Fire Extinguishers: At least one fire extinguisher with a minimum rating 2-A:10-B:C shall be required for each work place. In the case of large asbestos projects, at least two such fire extinguishers shall be required.
- N. First Aid Kits: Asbestos abatement contractor shall maintain adequately stocked first aid kits in the clean rooms of the decontamination units and within Work Areas. The first aid kit shall be approved by a licensed physician for the work to be performed under this Contract.
- O. Water Service:
 - 1. Temporary Water Service Connection: All connections to the Facilities water system shall include back flow protection. Valves shall be temperature and pressure rated for operation of the temperature and pressures encountered. After completion of use, connections and fittings shall be removed without damage or alteration to existing water piping, and equipment. Leaking or dripping fittings/valves shall be repaired and or replaced as required.
 - 2. Water Hoses: Employ new heavy-duty abrasion-resistant hoses with a pressure rating greater than the maximum pressure of the water distribution system to provide water into each Work Area and to each Decontamination Enclosure Unit. Provide fittings as required for connection to existing wall hydrants or spouts, as well as temporary water heating equipment, branch piping, showers, shut-off nozzles and equipment.
 - 3. Water Heater: Provide UL rated 40-gallon electric water heaters to supply hot water for Personal Decontamination Enclosure System Shower. Activate from 30 Amp Circuit breakers located within the Decontamination Enclosure sub panel. Provide relief valve compatible with water heater operations, pipe relief valve down to drip pan at floor level with type 'L' copper piping. Drip pans shall be 6-inch deep and securely fastened to water heater. Wiring of the water heater shall comply with NEMA, NECA, and UL standards.
- P. Electrical Service:
 - 1. General: Comply with applicable NEMA, NECA and UL standards and governing regulations for materials and layout of temporary electric service.
 - 2. Temporary Power: Provide service to decontamination unit sub panel with minimum 60 AMP, two pole circuit breaker or fused disconnect connected to the building's main distribution panel. Sub panel and disconnect shall be sized and equipped to accommodate all electrical equipment required for completion of the work.



3. Voltage Differences: Provide identification warning signs at power outlets that are other than 110-120 volt power. Provide polarized outlets for plug-in type outlets, to prevent insertion of 110-120 volt plugs into higher voltage outlets. Dry type transformers shall be provided where required to provide voltages necessary for work operations.
4. Ground Fault Protection: Equip all circuits for any purpose entering Work Area with ground fault circuit interrupters (GFCI). Locate the GFCIs outside the Work Area so that all circuits are protected prior to entry to Work Area. Provide circuit breaker type ground fault circuit interrupters (GFCI) equipped with test button and reset switch for all circuits to be used for any purpose in Work Area, decontamination units, exterior, or as otherwise required by NEC, OSHA or other authority.
5. Power Distribution System: Provide circuits of adequate size and proper characteristics for each use. In general run wiring overhead, and rise vertically where wiring will be least subject to damage from operations.
6. Temporary Wiring: In the Work Area shall be type UF non-metallic sheathed cable located overhead and exposed for surveillance. Provide liquid tight enclosures or boxes for all wiring devices. Do not wire temporary lighting with plain, exposed (insulated) electrical conductors.
7. Electrical Power Cords: Use only grounded extension cords; use hard service cords where exposed to traffic and abrasion. Use single lengths of cords only.
8. Temporary Lighting: All lighting within the Work Area shall be liquid and moisture proof and designed for the use intended.
 - a. Provide sufficient temporary lighting to ensure proper workmanship everywhere; by combined use of daylight, general lighting, and portable plug-in task lighting.
 - b. Provide lighting in the Decontamination Unit as required to supply a minimum 50-foot candle light level.
9. If electrical circuits, machinery, and other electrical systems in or passing through the work area must stay in operation due to health and safety requirements, the following precautions must be taken:
 - a. All unprotected cables, except low-voltage (less than 24 volts) communication and control system cables, panel boxes of cables and joints in live conduit that run through the work area shall be covered with three (3) independent layers of six (6) mil fire retardant polyethylene. Each layer shall be individually duct taped and sealed.



All three (3) layers of polyethylene sheeting shall be left in place until satisfactory clearance air sampling results have been obtained.

2.04 CLEANING

A. Throughout the construction period, the asbestos abatement contractor shall maintain the building as described in this Section.

1. The asbestos abatement contractor shall prevent building areas other than the Work Area from becoming contaminated with asbestos-containing dust or debris. Should areas outside the Work Area become contaminated with asbestos-containing dust or debris as a consequence of the asbestos abatement contractor's work practices, the asbestos abatement contractor shall be responsible for cleaning these areas in accordance with the procedures appended in Title 15, Chapter 1 of RCNY and NYSDOL ICR56. All costs incurred in cleaning or otherwise decontaminating non-Work Areas and the contents thereof shall be borne by the asbestos abatement contractor at no additional cost to the City.
2. The asbestos abatement contractor shall provide to all personnel and laborers the required equipment and materials needed to maintain the specified standard of cleanliness.

B. General

1. Waste water from asbestos removal operations, including shower water, may be discharged into the public sewer system only after approved filtration is on operation to remove asbestos fibers.
2. Asbestos wastes shall be double bagged in six mil (.006") fire retardant polyethylene bags approved for ACM disposal and shall be properly labeled and handled before disposal.
3. All waste generated shall be bagged, wrapped or containerized immediately upon removal. The personal and waste decontamination enclosure systems and floor and scaffold surfaces shall be HEPA vacuumed and wet cleaned at the end of each work shift at a minimum.
4. The asbestos abatement contractor shall use corrugated cartons or drums for disposal of asbestos-containing waste having sharp edged components (e.g., nails, screws, metal lathe and tin sheeting) that may tear polyethylene bags and sheeting. The waste within the drums or cartons must be double bagged.



5. The asbestos abatement contractor shall transport all bags of waste to disposal site in thirty gallon capacity metal or fiber drums with tight lids, or in locked steel dumpster.
6. Dumping of debris, waste or bagged waste will not be permitted.
7. The waste decontamination enclosure system shall be wet cleaned twice using wet cleaning methods upon completion of waste removal. When the worker decontamination enclosure shower room alternates as a waste container wash room, the shower room shall be washed immediately with cloths or mops saturated with a detergent solution prior to wet cleaning.
8. Excessive water accumulation or flooding in the work area shall require work to stop until the water is collected and disposed of properly.
9. ACM shall be collected utilizing rubber dust pans and rubber squeegees.
10. HEPA vacuums shall not be used on wet materials unless specifically designed for that purpose.
11. Metal shovels shall not be used within the work area.
12. Mastic solvent when used will be applied in moderation (e.g., by airless sprayer). Saturation of the concrete floor with mastic solvent must be avoided.
13. The asbestos abatement contractor shall retain all items in the storage area in an orderly arrangement allowing maximum access, not impeding traffic, and providing the required protection of all materials.
14. The asbestos abatement contractor shall not allow accumulation of scrap, debris, waste material, and other items not required for use in this work. When asbestos contaminated waste must be kept on the work site overnight or longer, it shall be double bagged and stored in accordance with New York City Department of Sanitation (NYCDOS) regulation Title 16 Chapter 8, and Federal, State and City laws.
15. At least twice a week (more if necessary), the asbestos abatement contractor shall completely remove all scrap, debris and waste material from the job site.
16. The asbestos abatement contractor shall provide adequate storage space for all items awaiting removal from the job site, observing all requirements for fire protection and concerns for the environment.



17. All respiratory protection equipment shall be selected from the latest NIOSH Certified Equipment list.
18. Daily and more often, if necessary, the asbestos abatement contractor shall inspect the Work Areas and adjoining spaces, and pick up all scrap, debris, and waste material. All such items shall be removed to the place designated for their storage.
19. Weekly, and more often, if necessary, the asbestos abatement contractor shall inspect all arrangements of materials stored on the site; re-stack and tidy them or otherwise service them to meet the requirements of these Specifications.
20. The asbestos abatement contractor shall maintain the site in a neat and orderly condition at all times.

PART 3 – EXECUTION

3.01 WORKER DECONTAMINATION FACILITY

A. Large Asbestos Projects (Small Project Option):

1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas
 - a. Structure:
 - (1) Use modular systems or build using wood or metal frame studs, joists, and rafters placed at a maximum of 16 inches on-center.
 - (2) When worker decontamination unit is located outdoors, in areas with public access, or in correctional facilities, frame work shall be lined with minimum 3/8" thickness fire rated plywood sheathing. Sheathing shall be caulked or taped airtight at all joints and seams.
 - (3) Interior shall be covered with two layers of fire retardant 6-mil polyethylene sheeting, with a minimum overlap of 12 inches at seams. Seal seams airtight using tape and adhesive. The interior floor shall be covered with two (2) layers of reinforced fire-retardant polyethylene sheeting with a minimum overlap on the walls of twelve inches.



- (4) Entrances to the decontamination unit shall be secured with lockable hinged doors. Doors shall be open at all times when abatement operations are in progress. Doors shall be louvered to allow for air movement through the decontamination units into Work Area.
- b. **Curtained Doorways:** A device to allow ingress or egress from one room to another while permitting minimal air movement between the rooms.
- c. **Air Locks:** Air locks shall consist of two curtained doorways placed a minimum of three feet apart.
- d. **Decontamination Enclosure System** shall be placed adjacent to the Work Area and shall consist of three totally enclosed chambers, separated from Work Area and each other by airlocks, as follows:
 - (1) **Equipment Room:** The equipment room shall have a curtain doorway to separate it from the Work Area, and share a common airlock with the shower room. The equipment room shall be large enough to accommodate at least one worker (allowing them enough room to remove their protective clothing and footwear), and a fire retardant 6-mil disposal bag for collection of discarded clothing and equipment. The equipment room shall be utilized for the storage of equipment and tools after decontamination using a HEPA-vacuum and/or wet cleaning. A one-day supply of replacement filters, in sealed containers, for HEPA-vacuums and negative air machines, extra tools, containers of surfactant, and other materials and equipment required for the project shall be stored here. A walk-off pan filled with water shall be placed in the Work Area just outside the equipment room for persons to clean foot coverings when leaving the Work Area. Contaminated footwear and reusable work clothing shall be stored in this room.
 - (2) **Shower Room:** The shower room shall have two airlocks (one that separates it from the equipment room and one that separates it from the clean room). The shower room shall contain at least one shower, with hot and cold water adjustable at the tap, per six workers. Careful attention shall be given to the shower to ensure against leaking of any kind and shall contain a rigid catch basin at least six inches deep. Asbestos abatement contractor shall supply towels, shampoo and liquid soap in the shower room at all times. Shower water shall be continuously drained, collected, and filtered through a system



with at least a 5-micron particle size collection capacity. A system containing a series of several filters with progressively smaller pore sizes shall be used to avoid rapid clogging of the filters by large particles. Pumps shall be installed, maintained and utilized in accordance with manufacturer's recommendations. Filtered water shall be discharged in accordance with applicable codes. Contaminated filters shall be disposed of as asbestos waste.

- (3) Clean Room: The clean room shall share a common airlock with the shower room and shall have a curtained doorway to separate it from outside non-contaminated areas. Lockers, for storage of workers' street clothing, and shelves, for storing respirators, shall be provided in this area. Clean disposable clothing, replacement filters for respirators, and clean dry towels shall be provided in the clean room. The clean room shall not be used for the storage of tool, equipment or other materials.

B. Small Asbestos Projects:

1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas.
2. The worker decontamination enclosure system shall consist of, as a minimum, an equipment room, a shower room, and a clean room separated from each other and from the work area by curtained doorways. The equipment storage, personnel gross decontamination and removal of disposal clothing shall occur in the equipment room prior to entering the shower. All other requirements shall be the same as described above for a large asbestos project.
3. For small asbestos projects with only one exit from the work area, the shower room may be used as a waste washroom. The clean room shall not be used for waste storage. All other requirements shall be the same as described above for a large asbestos project.

- C. Decontamination Enclosure System Utilities: Lighting, heat, and electricity shall be provided as necessary by the Asbestos abatement contractor, and as specified herein.

3.02 WASTE DECONTAMINATION FACILITY

A. Large Asbestos Project (Small Project Option)



1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas.
 - a. Structure:
 - (1) Use modular systems or build using wood or metal frame studs, joists, and rafters placed at a maximum of 16 inches on-center.
 - (2) When worker decontamination unit is located outdoors, in areas with public access, or in correctional facilities, frame work shall be lined with minimum 3/8" thickness fire rated plywood sheathing. Sheathing shall be caulked or taped airtight at all joints and seams.
 - (3) Interior walls shall be covered with two layers of fire retardant 6-mil polyethylene sheeting, with a minimum overlap of 12 inches at seams. Seal seams airtight using tape and adhesive. The interior floor shall be covered with two (2) layers of reinforced fire-retardant polyethylene sheeting with a minimum overlap on the walls of twelve inches.
 - (4) Entrances to the decontamination unit shall be secured with lockable hinged doors. Doors shall be open at all times when abatement operations are in progress. Doors shall be louvered to allow for air movement through the decontamination units into the Work Area.
 - b. Curtained Doorways: A device to allow ingress or egress from one room to another while permitting minimal air movement between the rooms.
 - c. Air Locks: Air locks shall consist of two curtained doorways placed a minimum of three feet apart.
 - d. Decontamination Enclosure System shall be located outside the work area and attached to all locations through which ACM waste will be removed from the work area and shall consist of two totally enclosed chambers, separated from the Work Area and each other by airlocks, as follows:
 - (1) Washroom: An equipment washroom shall have two air locks (one separating the unit from the Work Area and one common air lock that separates it from the holding area). The washroom

shall have facilities for washing material containers and equipment. Gross removal of dust and debris from contaminated material containers and equipment shall be accomplished in the Work Area, prior to moving to the washroom.

- (2) Holding Area: A holding area shall share a common air lock with the equipment washroom and shall have a curtained doorway to outside areas. A hinged, lockable door shall be placed at the holding area entrance to prevent unauthorized access into the Work Area.

B. Small Asbestos Project:

1. The worker decontamination enclosure system shall consist of, as a minimum, an equipment room, a shower room, and a clean room separated from each other and from the work area by curtained doorways. The equipment storage, personnel gross decontamination and removal of disposal clothing shall occur in the equipment room prior to entering the shower. All other requirements shall be the same as described above for a large asbestos project.
2. For small asbestos projects with only one exit from the work area, the shower room may be used as a waste washroom. The clean room shall not be used for waste storage. All other requirements shall be the same as described above for a large asbestos project.

- C. Decontamination Enclosure System Utilities:** Lighting, heat, and electricity shall be provided as necessary by the Asbestos abatement contractor, and as specified herein.

3.03 PERSONNEL ENTRANCE AND DECONTAMINATION PROCEDURES FOR REMOVAL OPERATIONS UTILIZING REMOTE DECONTAMINATION FACILITIES

- A. All individuals who enter the Work Area shall sign the entry log, located in the clean room, upon each entry and exit. The log shall be permanently bound and shall fully identify the facility, agents, asbestos abatement contractor(s), the project, each Work Area, and worker respiratory protection employed. The job supervisor shall be responsible for the maintenance of the log during the abatement activity. The log shall be submitted to the NYC DDC within 48 hours of request.
- B. Each worker shall remove street clothes in the clean room; wear two disposable suits, including gloves, hoods and non-skid footwear; and put on a clean respirator (with new filters) before entering the Work Area.



- C. Each worker shall, before leaving the Work Area or tent, clean the outside of the respirators and outer layer of protective clothing by wet cleaning and/or HEPA-vacuuuming. The outer disposable suit shall be removed in the airlock prior to proceeding to the Worker Decontamination Unit. The inner disposable suit and respirator shall be wet wiped and HEPA vacuumed thoroughly before removing and prior to aggressive shower.
- D. Following showering and drying off, each worker or authorized visitor shall proceed directly to the clean room, dress in street clothes, and exit the decontamination enclosure system immediately.

**3.04 PERSONNEL ENTRANCE AND DECONTAMINATION PROCEDURES FOR
REMOVAL OPERATIONS UTILIZING ATTACHED DECONTAMINATION
FACILITIES**

- A. All workers and authorized visitors shall enter the Work Area through the worker decontamination facility.
- B. All individuals who enter the Work Area shall sign the entry log, located in the clean room, upon each entry and exit. The log shall be permanently bound and shall identify fully the facility, agents, asbestos abatement contractor(s), the project, each Work Area and worker respiratory protection employed. The site supervisor shall be responsible for the maintenance of the log during the abatement activity. The log shall be submitted to the NYC DDC within 48 hours of request.
- C. Each worker or authorized visitor shall, upon entering the job site, remove street clothes in the clean room and put on a clean respirator with filters, and clean protective clothing before entering the Work Area through the shower room and equipment room.
- D. Each worker or authorized visitor shall, each time he leaves the Work Area, remove gross contamination from clothing before leaving the Work Area; proceed to the equipment room and remove clothing except the respirator; still wearing the respirator, proceed to the shower room; clean the outside of the respirator with soap and water while showering; remove filters, wet them, and dispose of them in the container provided for that purpose; wash and rinse the inside of the respirator; and thoroughly shampoo and wash himself/herself.
- E. Following showering and drying off, each worker or authorized visitor shall proceed directly to the clean room, dress in street clothes, and exit the decontamination enclosure system immediately. Disposable clothing of the type worn inside the Work Area is not permitted outside the Work Area.

3.05 MAINTENANCE OF DECONTAMINATION ENCLOSURE FACILITIES AND BARRIERS

The following procedures shall be followed during abatement activities.

- A. All polyethylene barriers inside the work place and partitions constructed to isolate the Work Area from occupied areas shall be inspected by the asbestos handler supervisor at least twice per shift.
- B. Smoke tubes shall be used to test the integrity of the Work Area barriers and the decontamination enclosure systems daily before abatement activity begins and at the end of each shift.
- C. Damage and defects in the decontamination enclosure system shall be repaired immediately upon discovery. The decontamination enclosure system shall be maintained in a clean and sanitary condition at all times.
- D. At any time during the abatement activity, if visible emissions are observed, or elevated asbestos fiber counts outside the Work Area are measured, or if damage occurs to barriers, abatement shall stop. The source of the contamination shall be located, the integrity of the barriers shall be restored and extended to include the contaminated area, and visible residue shall be cleaned up using appropriate HEPA-vacuuming and wet cleaning.
- E. Inspections and observations shall be documented in the daily project log by the asbestos handler supervisor.
- F. The daily inspection to ensure that exits have been checked against exterior blockage or impediments to exiting shall be documented in the log book. If exits are found to be blocked, abatement activities shall stop until the blockage is cleared.

3.06 MODIFICATIONS TO HVAC SYSTEMS

- A. Shut down, isolate or seal, all existing HVAC units, fans, exhaust fans, perimeter convection air units, supply and/or return air ducts, etc., situated in, traversing or servicing the work zone.
- B. Seal all seams with duct tape. Wrap entire duct with a minimum of two layers of fire retardant 6-mil polyethylene sheeting. All shutdowns are to be coordinated with the Facility. Where systems must be maintained, i.e., traversing Work Areas to non-Work Areas, only supply ducts will be maintained, protect as described above. All returns must be blanked off in Work Area and adjacent areas, including floor above and below Work Area. When required Asbestos abatement contractor shall apply for a clarification from NYCDEP. The Asbestos abatement contractor shall implement the following engineering procedures:



1. Maintenance of a positive pressure within the HVAC system of 0.01 inch water gauge (or greater) with respect to the ambient pressure outside the Work Area. The conditions for this system shall be maintained and be operational 24 hours per day from the initiation of Work Area preparation until successful final air clearance. Positive pressurization of HVAC system shall be applied only under the direction and control of professional engineer, or other knowledgeable licensed professional;
 2. The positive pressurization of the duct shall be tested, inspected and recorded both at the beginning and at the end of each shift;
 3. The positive pressurization shall be monitored using instrumentation which will provide a written record of pressurization and that will trigger an audible alarm, if the static pressure falls below the set value;
 4. The supply air fan and the supply air damper for the active positive-pressurized duct shall be placed in the manual "on" positions to prevent shutdown by fail-safe mechanisms;
 5. The return air fan and the return air dampers shall be shut down and locked-out;
 6. All the seams of the HVAC ducts that pass through the Work Area shall be sealed;
 7. The HVAC ducts that pass through the Work Area shall be covered with two (2) layers of fire retardant 6-mil polyethylene sheeting, and all seams and edges of both layers shall be sealed airtight;
 8. The supply air fans, return air fans, and all dampers servicing the Work Area itself shall be shut down and locked-out. All openings within the Work Area of supply and return air ducts shall be sealed with 3/8-inch fire rated plywood and two layers of fire retardant 6-mil polyethylene;
 9. When abatement occurs during periods while the HVAC system is shut down an alternative method of pressurization of the duct passing through the Work Area should be employed (e.g., by low-pressure "blowers", etc., directly coupled into the duct). Item #4 above shall be deleted and shall be replaced by the requirement to set the dampers of the HVAC duct in the manual closed positions, in order to effect pressurization.
- C. Asbestos abatement contractor to coordinate this item with the Facility and Construction Project Manager at the commencement of work. Where present HVAC systems (ducts) service an area and that air system cannot be shut down, asbestos abatement contractor shall isolate and seal the ducts, both supply and return, at the boundary of that zone.



1. To isolate, cap, or seal a duct, the asbestos abatement contractor shall remove insulation from duct (if necessary), then disconnect linkage to fold shut all fire dampers. Asbestos abatement contractor shall seal all edges and seams with caulk and duct-tape.
 2. Asbestos abatement contractor shall then cut existing duct and fold metal in and secure with approved fasteners. Asbestos abatement contractor shall caulk and duct-tape all seams and edges.
 3. All ducts shall then be completely wrapped and sealed with duct-tape and three (3) layers of reinforced polyethylene sheeting.
 4. All ducts shall be restored to original working order at the end of the project.
- D. Where present HVAC systems (ducts) service occupied areas (non-Work Areas), the Asbestos abatement contractor shall blank off the ducts.
1. To isolate or seal the return duct, the asbestos abatement contractor shall remove any insulation (if necessary) from the duct. Then disconnect linkage to fold shut all fire dampers and insert a fiberglass board within the duct. Asbestos abatement contractor shall seal all edges and seams with caulk, duct-tape and three (3) layers of reinforced polyethylene sheeting.
 2. All isolation of return ducts and any other activity that requires removal of ceiling by the asbestos abatement contractor shall be conducted under controls. Work is to be coordinated with the Construction Project Manager and the Facility and is described as follows:
 - a. Work shall occur as scheduled.
 - b. Horizontal surfaces near the blanking operations shall be protected with fire retardant 6-mil polyethylene sheeting.
 - c. Plastic drapes shall be used to enclose the immediate area.
 - d. Asbestos abatement contractor to position and operate air filtration devices and HEPA-vacuums in the area to clean space after blanking operations.
 - e. All personnel involved with this work shall receive personal protection (i.e., respirators and disposable suits).
- E. Upon loss of negative pressure or electric power, all work activities in an area shall cease immediately and shall not resume until negative pressure and/or electric



power has been fully restored. When a power failure or loss of negative pressure lasts, or is expected to last, longer than thirty (30) minutes, the following sequence of events shall occur.

1. All make up air inlets shall be sealed airtight.
2. All decontamination facilities shall be sealed airtight after evacuation of all personnel from the Work Area.
3. All adjacent areas shall be monitored for potential fiber release upon discovery of and subsequently throughout, power failure.

3.07 LOCKOUT OF HVAC SYSTEMS, ELECTRIC POWER, AND ACTIVE BOILERS

Prior to the start of any prep work, the asbestos abatement contractor shall employ skilled tradesmen with limited asbestos licenses for the following work:

- A. Disable all ventilating systems or other systems bringing air into or exhausting air out of the Work Area. Disable system by disconnecting wires removing circuit breakers, by lockable switch or other positive means to ensure against accidental re-starting of equipment.
- B. Lock out power to the Work Area by switching off all breakers and removing them from panels or by switching and locking entire panel. Label panel with following notation: "DANGER CIRCUIT BEING WORKED ON". Give all keys to Facility.
- C. Lock out power to circuits running through Work Area whenever possible by switching off and removing breakers from panel. If circuits must remain live, the Facility shall notify asbestos abatement contractor in order that he may secure a variance from NYCDEP. The asbestos abatement contractor shall protect all conduit and wires to remain and label all active circuits at intervals not to exceed 3 feet with tags having the following notation: "DANGER LIVE ELECTROCUTION HAZARD". The asbestos abatement contractor shall label all circuits in all locations including hidden locations that may be affected by the work in a similar manner.
- D. All boilers and other equipment within the work area shall be shut down, locked out, tagged out and the burner/boiler/equipment accesses and openings shall be sealed until abatement activities are complete. If the boiler or other exhausted equipment will be subject to abatement, all breeching, stacks, columns, flues, shafts, and double-walled enclosures serving as exhausts or vents shall be segregated from the affected boiler or equipment and sealed airtight to eliminate potential chimney effects within the work area.

PART 4 – PREPARATION OF WORK AREA AND REMOVAL PROCEDURES

4.01 REMOVAL OF ASBESTOS-CONTAINING MATERIAL

A. Asbestos abatement contractor Responsibility

Asbestos abatement contractor shall be responsible for the proper removal of ACM from the Work Area using standard industry techniques. The Third-Party Air Monitor representative shall observe the Work.

1. General Requirements:

- a. Removal of ACM shall be performed using wet methods. Dry removal of ACM is prohibited.
- b. Spray ACM with amended water with sufficient frequency and quantity to enhance penetration. Sufficient time shall be allowed for amended water to penetrate the material to the substrate prior to removal. All ACM shall be thoroughly wetted while work is being conducted.
- c. Accumulation of standing water on the floor of the Work Area is prohibited.
- d. Apply removal encapsulants, when used, in accordance with the manufacturer's recommendations and guidelines.
- e. Containerize ACM immediately upon detachment from the substrate. Alternately, ACM may be dropped in to a flexible catch basin and promptly bagged. Detached ACM is not permitted to lie on the floor for any period of time. Excess air within the bag shall be removed before sealing. ACM shall not be dropped from a height of greater than 10 feet. Above 10 feet, dust free inclined chutes may be used. Maximum inclination from horizontal shall be 60-degrees for all chutes.
- f. Exits from the work area shall be maintained, or alternative exits shall be established, in accordance with section 1027 of the New York City Fire Code. Exits shall be checked at the beginning and end of each work shift against blockage or impediments to exiting.
- g. Signs clearly indicating the direction of exits shall be maintained and prominently displayed within the work area.
- h. No smoking signs shall be maintained and prominently displayed within the work place.



- i. At least one fire extinguisher with a minimum rating 2-A:10-B:C shall be required for each work place. In the case of large asbestos projects, at least two such fire extinguishers shall be required.
 - j. If the containment area of an asbestos project covers the entire floor of the affected building, or an area greater than 15,000 square feet on any given floor, the installation of a negative air cut off switch or switches shall be required at a single location outside the work place, such as inside a stairwell, or at a secured location in the ground floor lobby when conditions warrant. The required switch or switches shall be installed by a licensed electrician pursuant to a permit issued by the Department of Buildings. If negative pressure ventilation equipment is used on multiple floors the cut off switch shall be able to turn off the equipment on all floors.
- B. Removal of ACM Utilizing Full Containment Procedures shall be as follows:
1. Preparation Procedures:
 - a. Ensure that the Third-Party Air Monitor has performed area monitoring and established a background count prior to the preparatory operations for each removal area, as applicable.
 - b. Shut down, isolate, and lock out or tag heating, ventilating, and air conditioning (HVAC) systems which serve or which pass through the Work Area. Vents within the Work Area and seams in HVAC components shall be sealed with tape and two layers of fire retardant polyethylene sheeting. Filters in HVAC systems shall be removed and treated as asbestos-asbestos contaminated waste.
 - c. Shut down, disconnect, and lock out or tag all electric power to the Work Area so that there is no possibility of its reactivation until after clearance testing of the Work Area.
 - d. Provide and install decontamination enclosure systems in accordance with Sections 3.01 and 3.02 of this Section.
 - e. Remove ACM that may be disturbed by the erection of partitions using tent procedures and wet removal methods. Removal shall be limited to a one-foot wide strip running the length/height of the partition.
 - f. Pre-clean and remove moveable objects from the Work Area. Pre-cleaning shall be accomplished using HEPA-vacuum and wet-cleaning techniques. Store moveable objects at a location determined by the City.

- g. Protect carpeting that will remain in the Work Area.
 - (1) Pre-clean carpeting utilizing wet-cleaning techniques.
 - (2) Install a minimum of two layers of fire retardant 6-mil reinforced polyethylene sheeting over carpeting.
 - (3) Place a rigid flooring material, minimum thickness of 3/8-inch, over polyethylene sheeting.
- h. Pre-clean all fixed objects to remain within the Work Area using HEPA-vacuum and wet-cleaning techniques.
- i. Seal fixed objects with two individual layers, minimum, of 6-mil fire retardant polyethylene sheeting.
- j. Pre-clean entire Work Area utilizing HEPA-vacuum and wet-cleaning techniques. Methods of cleaning that raise dust; such as dry sweeping or use of vacuum equipment not equipped with HEPA-filters, is prohibited.
- k. Install isolation barriers (i.e., sealing of all openings, including but not limited to windows, corridors, doorways, skylights, ducts, grills, diffusers, and other penetrations within the Work Area) using two layers of 6-mil fire retardant polyethylene sheeting and duct-tape.
- l. Construct rigid framework to support Work Area barriers.
 - (1) Framework shall be constructed using 2-inch by 4-inch wooden or metal studs placed 16 inch on center when existing walls and/or ceiling do not exist for all openings greater than 32 square feet. Framework is not required except where one dimension is one foot or less or the opening will be used as an emergency exit.
 - (2) Apply a solid construction material, minimum thickness of 3/8-inch to the Work Area side of the framing. In secure interior areas, not subject to access from the public or building occupants, an additional layer of 6-mil fire retardant polyethylene sheeting may be substituted for the rigid construction material.
 - (3) Caulk all wall, floor, ceiling, and fixture joints to form a leak tight seal.



- m. Seal floor drains, sumps, shower tubs, and other collection devices with two layers of 6-mil fire retardant plastic and fire rated plywood, as necessary, and provide a system to collect all water used by the asbestos abatement contractor. Collected water shall be passed through a water filtration system prior to being discharged into the sanitary sewer.
- n. Remove ceiling mounted objects not previously sealed that will interfere with removal operations. Mist object and surrounding ACM with amended water prior to removal to minimize fiber dispersal. Clean all moveable objects using HEPA-vacuum and wet-cleaning techniques prior to removal from the Work Area.
- o. Fiberglass insulation with intact coverings shall be protected in place during abatement activities. These materials shall be protected with two layers of 6-mil fire retardant polyethylene sheeting as isolation barriers and two additional layers of 6-mil fire retardant polyethylene sheeting serving as primary and secondary surface barriers.
- p. Install and initiate operation of AFDs to provide a negative pressure and a minimum of four air changes per hour within the Work Area relative to surrounding non-Work Areas. Do not shut down AFDs until the Work Area is released to the City following final clearance procedures. The use of HEPA-filtered vacuum to produce a negative air pressure inside the enclosure is prohibited.
- q. Maintain emergency and fire exits from the Work Areas or establish alternative exits satisfactory to the local fire officials. Emergency exits and routes shall be established and clearly marked with florescent paint or other effective designations to permit easy location from anywhere within the Work Area. Cutting tools (e.g., knife, razor) shall be attached to the work area side of the sheeting for use in the event that the barrier must be cut open to allow egress. Emergency exits shall be secured to prevent access from uncontaminated areas and yet permit emergency exiting. Exits shall be checked daily against exterior blockage or impediments to exiting.
- r. Temporary lighting within the Work Area and decontamination system shall be provided as required to achieve minimum illumination levels.
- s. Hand power tools used to drill, cut into, or otherwise disturb ACM shall be manufacturer-equipped with HEPA filtered local exhaust ventilation.

- t. Prior to being plasticized, the Work Areas shall be cleaned using HEPA vacuum equipment and/or wet cleaning methods as appropriate. Methods that raise dust, such as dry sweeping or vacuuming with equipment not equipped with HEPA filters, shall not be used.
- u. Plasticize the area after pre-cleaning, using the following procedures.
 - (1) Cover floors with one layer of 6-mil fire retardant polyethylene sheeting, turning layer a minimum of 6 inches up wall, and seal layer to wall.
 - (2) Cover walls with one layer of 6-mil fire retardant polyethylene sheeting, overlapping wall layer a minimum of 6 inches, and seal layer to floor layer.
 - (3) Cover floors with a second layer of 6-mil fire retardant polyethylene sheeting, turning layer a minimum of 12 inches up wall, and seal layer to wall.
 - (4) Cover walls with a second layer of fire retardant 6-mil polyethylene sheeting, overlapping wall layer a minimum of 12 inches, and seal layer to floor layer.
 - (5) In areas where demolition is required to access ACM, a layer of fire retardant 6-mil reinforced polyethylene sheeting shall be placed on the floor of the enclosure.
 - (6) Perform demolition required to access ACM. Debris resulting from demolition activities shall be disposed of as ACM waste as described in this Specification.
 - (7) Repeat preparation of areas accessed by demolition activities as described above.
- v. Suspended ceiling tiles and T-grid components shall remain in place until the preparation of the Work Area below the ceiling tiles are completed and personnel and equipment decontamination enclosures have been constructed.
- w. Scaffolds shall be provided for workers engaged in work that cannot safely be performed from the ground or other solid Work Area surface.
- x. Means of egress shall not be obstructed by hardwall barriers.



- y. Pre-Removal Inspections.
 - (1) Prior to removal of any ACM, the asbestos abatement contractor shall notify the Third-Party Air Monitor and request a pre-removal inspection. Posting of warning signs, building of decontamination enclosure systems, and all other preparatory steps have been taken prior to notification of the Third-Party Air Monitor.
 - (2) Asbestos abatement contractor shall correct any deficiencies observed by Third-Party Air Monitor at no additional cost to City.
 - (3) Following the Third-Party Air Monitor's approval of the Work Area preparations, removal of ACM may commence.

2. Removal of ACM Within Full Containment:

- a. Mist material with amended water. Allow sufficient time for the amended water to penetrate the material to be removed.
- b. Remove the material using hand tools such as scrapers or putty knives. Wire-mesh or wood lathe reinforcing, when present, shall be cut into manageable pieces and disposed of as ACM.
- c. Remove any residual material from the substrate using wet cleaning methods and nylon-bristled hand brushes.
- d. Place the removal material immediately into a properly labeled fire retardant 6-mil polyethylene bag. All material shall be properly containerized and decontaminated prior to removal from the Work Area.
- e. Following the completion of removal of insulation, all visible residue shall be removed from the substrate.

3. Following Removal of ACM utilizing Full Containment Procedures:

- a. First Cleaning:
 - (1) Remove any visible accumulation of asbestos material and debris. HEPA-vacuuming and wet cleaning shall be performed on all surfaces inside the Work Area. All sealed drums, plastic bags, and equipment used in the Work Area shall be removed from the Work Area.



- (2) Upon request of the asbestos abatement contractor, the Third-Party Air Monitor will perform a visual inspection. Evidence of asbestos contamination identified during the inspection will necessitate further cleaning as heretofore specified.
 - (3) Remove first layer of plastic sheathing inside the Work Area. The isolation barriers and decontamination facility shall remain in place and be utilized.
- b. Second Cleaning:
- (1) After the first cleaning, the Work Area shall be vacated for twelve hours to allow fibers to settle.
 - (2) All objects and surfaces in the Work Area shall be HEPA - vacuumed and wet cleaned for a second cleaning.
 - (3) A thin coat of lockdown encapsulant shall be applied to all plastic covered surfaces in the Work Area.
 - (4) When the encapsulant is dry, second layer of polyethylene sheeting on the walls, ceiling and floors shall be removed. Do not remove seals from doors, windows, Isolation Barriers or disconnect the negative pressure equipment.
- c. Third Cleaning:
- (1) A minimum of four hours after the second cleaning, all the surfaces in the Work Area shall be HEPA-vacuumed and wet cleaned for a third cleaning.
 - (2) Upon the request of the asbestos abatement contractor, the Third-Party Air Monitor will do final visual inspection for re-occupancy. Evidence of asbestos contamination identified during the inspection will necessitate further cleaning as heretofore specified.
 - (3) When the Work Area passes the Third-Party Air Monitor's visual re-occupancy inspection, air sampling shall not begin until at least one hour after the completion of the third cleaning. The Third-Party Air Monitor shall perform air monitoring using aggressive testing techniques. The Third-Party Air Monitor will approve re-occupancy if the specified fiber count in the Work Area is achieved according to the Third-Party Air Monitor.



- (4) When the Work Area passes the re-occupancy test, all controls and seals established shall be removed.
 - (5) The cleaned layer of the surface barriers shall be removed from walls and floors.
 - (6) The isolation barriers shall remain in place throughout cleanup. Decontamination enclosure systems shall remain in place and be utilized. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.
- d. Final Barrier Removal:
- (1) Upon receipt of acceptable clearance testing results, polyethylene sheeting and Isolation Barriers shall be removed and disposed accordingly as asbestos-containing material.
 - (2) The area surrounding the abatement work place shall be cleaned of any visible debris utilizing HEPA vacuum and wet methods.
- e. The Third-Party Air Monitor will conduct a final visual observation. Approval must be granted prior to break down of decontamination facility and asbestos abatement contractor demobilization.
- C. Removal of ACM Roofing and Flashing Materials utilizing NYC DEP § 1-107 Foam Procedure for Roof Removal shall be as follows:
- I. Preparation procedures:
 - a. These procedures apply only to the removal of asbestos-containing roofing material (ACRM) from exterior roof surfaces. The work area on the roof shall be cordoned off with clearly visible barriers such as caution tape, and only authorized persons shall have access.
 - b. The foam or viscous liquid shall be non-toxic, shall not require special respiratory protection for handling, and shall not affect the handling and disposal of the waste.
 - c. The foam or viscous liquid shall coat and maintain a stable blanket (minimum 1" thickness) for the duration of the removal process and shall leave an identifiable colored residue when it dissipates.

- d. The foam or viscous liquid shall wet the ACRM. The ACRM shall be kept wet through the bagging process.
- e. Persons entering the work area shall wear correctly-fitting, good traction rubber boots.
- f. Abatement shall not be carried out during adverse weather conditions (e.g., precipitation, high winds, ambient temperature below 32 degrees Fahrenheit, etc.).
- g. The worker decontamination unit may be attached to each work area at an entry/exit from each work area, or may be remote, in which case it shall be equipped with an airlock at the entrance. In addition to the shower head(s), the shower room shall be equipped with a flexible hose for waste decontamination for removal of less than 1,000 square feet of ACRM. For 1,000 square feet or more of ACRM removal, a separate waste decontamination facility shall be located at an entry/exit from each work area. Remote holding areas for the asbestos containing waste shall comply with Title 16, Chapter 8, Rules of the City of New York (16 RCNY 8 et. seq.).
- h. Movable objects shall be removed from the work area, or kept in place and wrapped in one sheet of fire retardant 6 mil plastic sheeting.
- i. Provisions shall be made to ensure a safe and adequate air supply to affected building(s). All vents, skylights, air intakes, windows and doors opening onto the roof, and all other openings shall be sealed with 2 layers of fire retardant 6 mil plastic or fitting with HEPA filters when appropriate. Temporary extensions may be installed to a height of 10 feet to ensure adequate air exchange instead of sealing vents, air intakes, etc., with 2 layers of plastic or HEPA filters. Drains may be equipped with 5 micron filtering system in lieu of being sealed.
- j. Fixed objects including perimeter walls, bulkheads, cooling towers, ducts and other rooftop appurtenances shall be covered in one sheet of fire retardant 6 mil plastic up to a height of at least six feet.
- k. THE ASBESTOS ABATEMENT CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTION OF THE INTERIOR SPACES BENEATH THE ROOF.
- l. All office equipment and furniture, including but not limited to desks, chairs, computers, printers, cabinets, etc., carpeted and wooden floors shall be covered with one layer of 6- mil plastic sheeting.



- m. THE ASBESTOS ABATEMENT CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE THAT MAY OCCUR IN THE INTERIOR SPACES, INCLUDING BUT NOT LIMITED TO OFFICE EQUIPMENT, FURNITURE, FLOORS, ETC., BENEATH THE ROOF DURING ALL PHASES OF THE ROOF ABATEMENT.
- n. The asbestos abatement contractor shall provide temporary roof protection consisting of 10-mil polyethylene sheeting following abatement over the open roof areas. Strict coordination with the General Asbestos abatement contractor, Construction Project Manager and/or Architect is required and necessary during this phase of abatement.
- o. Preliminary examination shall be conducted and precautions shall be taken to prevent damage to the interior of the building, including but not limited to office equipment, furniture, carpeted and wooden floors, etc., and to ensure no adverse effect on the structural stability of the roof due to the abatement activity.
- p. Abatement activities shall not be carried out during adverse weather conditions (e.g., precipitation, heavy winds, etc.).
- q. The floor area between the remote decontamination facility and the Work Area must be protected with 2 layers of 6-mil. polyethylene sheeting suitably anchored.
- r. Provisions shall be made to ensure a safe and adequate air supply to affected building(s). All vents, skylights, air intakes, windows and doors opening onto the roof, and all other openings are to be sealed with two layers of 6-mil plastic or fitted with HEPA-filters where appropriate. In lieu of sealing vents, air intakes, etc., with two layers of plastic or HEPA-filters, temporary extensions may be installed to a height of 10 feet to ensure adequate air exchange. Drains may be equipped with 5 micron filtering systems in lieu of being sealed.
- s. Pre-Removal Inspections:
 - (1) Prior to removal of any ACM, the Asbestos abatement contractor shall notify the Third-Party Air Monitor and request a pre-removal inspection. Posting of warning signs, building of decontamination enclosure systems, and all other preparatory steps have been taken prior to notification of the Third-Party Air Monitor.



- (2) Asbestos abatement contractor shall correct any deficiencies observed by Third-Party Air Monitor at no additional cost to City.
 - (3) Following the Third-Party Air Monitor's approval of the Work Area preparations, removal of ACM may commence.
2. Removal of ACM Roofing and Flashing Materials:
- a. The asbestos abatement contractor shall be responsible for the removal of all roofing components, including multiple layers of built-up membrane, tar, vapor barrier and/or flashing down to the substrate/deck.
 - b. Prior to actual removal, the built-up roofing shall be blanketed and wetted with a minimum 1" coating of the acceptable foam or viscous liquid which shall be maintained for the duration of the removal until the material is bagged. The foam or viscous liquid shall be confined to the work area.
 - c. Hand-held power tools used to drill, cut into, or otherwise disturb the ACRM shall be equipped with the HEPA-filtered local exhaust ventilation and operated to prevent potential fiber release.
 - d. Abatement shall not be performed in adverse weather conditions (e.g., precipitation, heavy winds, etc.). Asbestos abatement contractor shall protect all exposed roof during adverse weather conditions.
 - e. Portable HEPA-vacuum machines shall be available during abatement.
 - f. After the ACM removal and bagging, the bagged waste shall be HEPA-vacuumed, and then wet-cleaned and transferred into the shower room for double bagging. The double-bagged waste shall be transferred outside the clean room for its final transfer for storage in an enclosed waste container.
3. Following Removal of ACM Roofing and/or Flashing:
- a. Upon completion of the abatement in roof work area, clean-up procedures shall involve removal and bagging of:
 - b. The asbestos containing roofing material (ACRM)
 - c. Visible accumulations of asbestos containing waste



- d. All excess foam or similar viscous liquid
- e. All debris, and shall be followed by a thorough wet cleaning.
- f. All tools shall be wet cleaned and HEPA-vacuumed, and then removed from the work area upon completion.
- g. Following the removal of all debris, the work area shall be thoroughly wet cleaned. The work area shall be allowed to dry completely before the visual inspection is conducted. The inspection shall confirm the absence in the work area of:
 - (1) ACM, debris, bagged ACM waste,
 - (2) Excess foam or other viscous liquid.
- h. If the work area fails visual inspection, it shall undergo another wet cleaning and/or HEPA vacuuming until it passes the visual inspection.
- i. When the visual inspection and clearance testing is successful, all plastic may be removed.
- j. Air monitoring shall be conducted in accordance with the relevant provisions of Air sampling shall be conducted in compliance with NYC DEP Title 15 Chapter 1, §1-41 Air Sampling Schedule.

4.02 MAINTENANCE OF CONTAINED WORK AREA AND DECONTAMINATION ENCLOSURE SYSTEMS

- A. Ensure that barriers are installed in a manner appropriate to the expected weather conditions during the project and for its duration. Repair damaged barriers and remedy defects immediately upon their discovery. Visually inspect barriers at the beginning and end of each work period.
- B. Visually inspect non-Work Areas and the decontamination enclosure system for water leakage. Check the floor below, ceiling and walls, and view beneath/or around the decontamination enclosure system, for signs of leakage. Perform the visual inspection a minimum of two times for each 8-hour work shift.

PART 5 – ASBESTOS WASTE MANAGEMENT

5.01 ACM WASTE REQUIREMENTS

- A. The asbestos abatement contractor and all sub-asbestos abatement contractors are specifically alerted to the illegal practice of combining asbestos-containing waste



(ACW) from one project with the ACW of other projects without using the services of a permitted waste transfer station as defined by 6 NYCRR Part 360 and 364. As part of the shop drawing submittals, the Asbestos abatement contractor must submit for approval the proposed method of transportation and disposal that will be utilized to manage the ACW of this Contract. If a permitted transfer station is to be used, the cost shall be included in the work. The asbestos abatement contractor must submit a waste manifest consistent with whatever approved method is utilized as part of the invoicing and payment procedures.

- B. The asbestos abatement contractor shall maintain compliance with the strictest set of regulations of Title 15, Chapter 1 of RCNY, NYC LL 70/85, NYS DOL ICR 56, USEPA, Asbestos Regulation 40 CFR Section 61.152, 29 CFR 1926.1101, 29 CFR 1910.1200 (F) of OSHA's Hazard Communication Standards, and other applicable standards.

NOTE: Any penalties incurred for failure to comply with any of the above regulations will be the sole responsibility for fines imposed due to negligence of the Asbestos abatement contractor.

- C. When presenting ACW for storage at the generation site, the Asbestos abatement contractor shall:

1. Wet down ACW in a manner sufficient to prevent all visible emissions of dust into the air.
2. Seal material in a leak tight container while wet.
3. Keep ACW separate from any other waste.

- D. When presenting ACW for storage away from the site of generation, the Asbestos abatement contractor shall:

1. Ensure that ACW has been properly packaged as per requirements above.
2. Examine the containers of ACW to ensure that there are no breaks in the containers and that no visible dust is being released into the air.
3. If examination reveals damage to a container of ACW the Asbestos abatement contractor or person accepting the waste shall immediately wet down the ACW and repackage it into a clean leak tight container. The subsequent repackaging shall be the financial responsibility of the Asbestos abatement contractor and occur at no extra cost to the City.

- E. When storing ACW – The Asbestos abatement contractor shall:



1. Ensure that the ACW has been sufficiently wetted down in tight containers.
2. Re-wet and repackage any damaged containers.
3. Maintain at storage site an adequate supply of spare leak tight containers.
4. Maintain at storage site an adequate supply of amended water.
5. Keep ACW separate from any other waste.
6. Keep ACW in a secured, enclosed, and locked container.
7. If the Asbestos abatement contractor has intention of sorting a quantity of ACW greater than or equal to 50 cubic yards, the Asbestos abatement contractor shall:
 - a. Submit a written request and receive written approval from the City.

F. When presenting for transport, the Asbestos abatement contractor shall:

1. Ensure that ACW has been sufficiently wetted down.
2. Examine the integrity of the container's airtight seal.
3. Re-wet and repackage any damaged containers.
4. Keep ACW separate from all other waste.
5. Ensure that a person transporting asbestos waste holds a valid permit issued pursuant to law.
6. Frequency of Waste Removal:
 - a. Properly packaged and labeled asbestos waste shall be removed from the site on a daily basis. Under no circumstance shall asbestos waste be stored on site without written approval from the City. The Waste Hauler and landfill shall be as indicated on the notifications to regulatory agencies.

G. Waste Load-out Through Equipment Decontamination Enclosure (Full Decontamination Facility): Place asbestos waste in disposal bags. Large items not able to fit into disposal bags shall be wrapped in one layer of 6-mil thick polyethylene sheeting. Clean outer covering of asbestos waste package by wet cleaning and/or HEPA-vacuuming in a designated part of the Work Area. Move wrapped asbestos waste to the equipment washroom, wet clean each bag or object and place it inside a second disposal bag, or a second layer of 6-mil polyethylene



sheeting, as the item's physical characteristics demand. Air volume shall be minimized, and the bags or sheeting shall be sealed airtight with tape.

1. The clean containerized items shall be moved to the equipment decontamination enclosure holding area pending load-out to storage or disposal facilities.
 2. Workers who have entered the equipment decontamination enclosure system from the uncontaminated non-Work Area shall perform load-out of containers from the decontamination enclosure holding area. Dress workers moving asbestos waste to storage or disposal facilities in clean overalls of a color different than from that of coveralls used in the Work Area. Ensure that workers do not enter from uncontaminated areas into the equipment washroom or the Work Area. Ensure that contaminated workers do not exit the Work Area through the equipment decontamination enclosure system.
 3. Thoroughly clean the equipment decontamination enclosure system immediately upon completion of the waste load-out activities, and at the completion of each work shift.
 4. Labeled ACM waste containers or bags shall not be used for non-ACM debris or trash. Any materials placed in labeled containers or bags, including those turned "inside-out", shall be handled and disposed of as ACM waste.
- H. All asbestos materials, wastes, shower water, polyethylene, disposable equipment and supplies shall be disposed of as asbestos contaminated waste, in accordance with the EPA regulation (40 CFR, Section 61.150) and those requirements of the New York Department of Environmental Conservation and New York City Department of Sanitation.
- I. All asbestos materials shall be prepared for transportation in accordance with this specification and all applicable Federal, State, County and City Regulations. asbestos abatement contractor shall submit the following documentation:
1. Where applicable, an EPA Generator's identification number which has been obtained from the EPA for all asbestos waste generated from the project.
 2. Applicable State Waste Hauler license and registration numbers.
 3. Federal Hazardous Materials Waste Hauler number.
 4. Designated landfill EPA Permit numbers.
- J. Prior to loading asbestos waste the enclosed cargo areas (dumpster) shall be prepared as follows:



1. Clean via HEPA-vacuum and wet wipe techniques the enclosed cargo areas of all visible debris prior to preparing with polyethylene.
 2. Line the cargo area with two layers of 6-mil polyethylene sheeting to prevent contamination from damaged or leaking containers. Floor sheeting shall be installed first and extend up the walls a minimum of 24-inches. Wall sheeting shall be overlapped and taped securely into place.
- K. Asbestos-containing waste shall be placed on level surfaces in the cargo area of the dumpster and shall be packed tightly to prevent any shifting or tipping of the waste during transportation.
- L. Asbestos-containing waste shall not be thrown into or dropped from the dumpster. All material shall be handled carefully to prevent rupture of the containers.
- M. All personnel engaged in handling and loading of asbestos contaminated waste outside of the Work Area shall wear protective clothing. The disposable clothing shall include head, body and foot protection and color of clothing shall be different from abatement personnel in the Work Area. Minimum respiratory protection shall be half face, dual cartridge, air purifying respirators with HEPA-filters.
- N. Asbestos abatement contractor shall immediately clean debris or residue observed on containers or surfaces outside of the Work Area. Cleaning shall be via HEPA equipped wet/dry vacuums only.
- O. All asbestos-containing waste shall be transported from the abatement site to the landfill by a registered Waste Hauler. When transporting ACW:
1. Ensure that the ACW has been sufficiently wetted down in a leak tight container.
 2. Re-wet and repackage any damaged containers.
 3. Maintain at storage site an adequate supply of spare leak tight containers.
 4. Maintain at storage site an adequate supply of amended water.
 5. Keep ACW separate from any other waste.
- P. Keep ACW in a secured, enclosed, and locked container.
- Q. Waste transport documents shall conform to the requirements of the U.S. Department of Transportation, Hazardous Materials Transportation Regulation, 49 CFR Part 173 and EPA 40 CFR 61.150 (d)(1)(2). Shipping documents shall be clearly marked with the required designation "RQ Asbestos". Asbestos abatement contractor shall provide a copy of this document to the City.



- R. A uniform hazardous waste manifest shall be prepared by the asbestos abatement contractor and signed by the asbestos abatement contractor each time the asbestos abatement contractor ships a dumpster load of Asbestos-Containing Waste Material. The uniform hazardous waste manifest shall include the site of waste generation, the names and addresses of the Transporter, the asbestos abatement contractor, and the landfill operator with information on the type and number of asbestos-waste containers, time and date. Asbestos abatement contractor shall provide the Construction Project Manager, Third-Party Air Monitor or authorized designated representative with signed copies of the waste manifest before each departure.
- S. Asbestos abatement contractor or his registered hazardous Waste Hauler shall transport asbestos-containing waste material from the abatement site directly to the specified disposal site. Asbestos abatement contractor or their Waste Hauler shall not accept material from any other site when transporting asbestos-containing waste material from the abatement site. The authorized DDC representative or Construction Project Manager reserves the right to travel with asbestos abatement contractor's Waste Hauler to the waste disposal site. No intermediate storage of waste material (i.e., asbestos abatement contractor's warehouse) shall be permitted.
- T. Final or progress application for payments will not be processed unless all hazardous waste manifests generated to date have been received and reviewed by the Construction Project Manager.
- U. All asbestos materials, wastes, shower water, polyethylene disposable equipment and supplies shall be disposed of as asbestos contaminated waste, in accordance with the EPA regulation (40 CFR, Section 61.150) and those requirements of the New York State Department of Environmental Conservation and the New York Department of Sanitation.
- V. Asbestos abatement contractor shall transport all sealed drums to a landfill disposal site approved by the Department of Environmental Conservation and the EPA. Transportation shall be performed by a New York State registered Waste Hauler, where required. When presenting the ACW for disposal the Asbestos abatement contractor or sub Asbestos abatement contractor shall:
1. Ensure that waste container is properly labeled according to the National Emission Standard for Hazardous Air Pollutants (NESHAP); Asbestos Revision, 40 CFR, Part 61, Subpart M. The labels shall include the name of the waste generator and the location where the waste was generated.
 2. Comply with all applicable orders issued pursuant to asbestos disposal.
 3. Ensure that ACW has been sufficiently wetted down.
 4. Re-wet and repackage any damaged containers.



5. Keep ACW separate from all other wastes.
- W. Asbestos abatement contractor shall notify the waste disposal site, at least 24 hours prior to transportation of asbestos contaminated waste to be delivered. Asbestos abatement contractor shall determine if a larger notification period is required.
- X. At the site asbestos abatement contractors or Waste Hauler trucks shall approach the dump location as close as possible for unloading asbestos waste. Containers shall be carefully placed in the ground. Do not throw containers from truck.
- Y. Asbestos abatement contractor or Waste Hauler shall inspect containers as they are unloaded at the disposal site. Material in damaged containers shall be repacked in empty containers, as necessary.
- Z. Asbestos abatement contractor or Waste Hauler shall not remove asbestos-containing waste Material from drums unless required to do so by the disposal site City. Used drums shall be disposed of as asbestos-asbestos contaminated waste.
- AA. All personnel engaged in unloading of the containers at the waste site shall wear protective clothing. The disposable clothing shall include head, body and foot protection. Minimum respiratory protection shall be half face, dual cartridge, air purifying respirators with HEPA-filters. Workers shall remove their protective clothing at the disposal site, place it in labeled disposal bags and leave them with the deposited waste shipment.
- BB. For the compaction operation, the asbestos abatement contractor shall ensure that disposal sites personnel have been provided with personal protective equipment by the disposal operator. If the disposal site City has not provided this protective equipment, the asbestos abatement contractor shall supply protective clothing and respiratory protection for the duration of this operation (PAPR respirators are mandatory).
- CC. If containers are broken or damaged, the asbestos abatement contractor or Waste Hauler shall, using personnel who are properly trained and wearing proper protective equipment, shall repackage the waste in properly labeled containers. Asbestos abatement contractor shall then clean the entire truck and its contents using HEPA-vacuums and wet cleaning techniques until no visible residue is observed.
- DD. Following the removal of all containerized waste, the asbestos abatement contractor shall decontaminate the truck cargo area using HEPA-vacuums and/or wet cleaning techniques until no residue is observed. All 6-mil polyethylene sheeting shall be removed and discarded as asbestos-containing waste material along with contaminated cleaning material and protective clothing, in containers at the disposal site.

- EE. The transporter(s) of all asbestos waste shall not back-haul any items on his return from landfill/disposal site.
- FF. All asbestos waste shall be disposed of in an approved Asbestos Landfill site only.
 - 1. NO PERSON UNDER ANY CIRCUMSTANCES SHALL ABANDON ACW. The same shall be disposed of only by certified persons in approved landfills.
 - 2. A manifest form will be signed by the Landfill documenting receipt and acceptance of the asbestos-containing waste. This manifest will be furnished to the City of New York within thirty calendar days from the project completion date.
 - 3. It is the responsibility of the Asbestos abatement contractor to determine current waste handling, transportation and disposal regulations for the work site and for each waste disposal landfill. The Asbestos abatement contractor must comply fully with these regulations and all appropriate U.S. Department of Transportation, EPA and other Federal, State and Local entities' regulations and all other current legal requirements.
 - 4. The asbestos abatement contractor shall obtain an agreement from the transporter (s) that the practice of "Back-Hauling" will not be engaged in, with respect to any and all waste loads taken from this site during the work.
 - 5. The asbestos abatement contractor will document actual disposal of the waste at the designated landfill by having completed a Disposal Certificate and will provide a copy of the same to the Department of Design and Construction.

PART 6 – ACCEPTANCE

6.01 ACCEPTANCE

Upon satisfactory completion of all decontamination procedures, a certificate will be issued by the Construction Project Manager with copies to all parties.

- A. A letter of Compliance stating that all the work on the project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations.
- B. All warranties as stated in the Specifications.

END OF SECTION 028213

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 03 30 00

CAST-IN-PLACE CONCRETE

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 REFERENCES

A. Except as shown or specified otherwise, the Work of this Section shall conform to the requirements of American Concrete Institute (ACI) and American Society for Testing and Materials (ASTM) documents.

1. ACI 301-99: Specification for Structural Concrete for Buildings.
2. ACI 302.1R-96: Guide for Concrete Floor and Slab Construction.
3. ACI 304.2R-96: Placing Concrete by Pumping Methods.
4. ACI 305R-99: Hot Weather Concreting.
5. ACI 306R-88: Cold Weather Concreting (Re-approved 1997).
6. ACI 308.1-98: Standard Specification for Curing Concrete.
7. ACI 318 Building Code Requirements for Reinforced Concrete.
8. ASTM C 94/C 94M - 04: Standard Specification for Ready-Mixed Concrete.
9. ASTM C 494/C 494M - 04: Standard Specification for Chemical Admixtures for Concrete.

1.02 DEFINITIONS

A. ACI 301, Section 1.2 - Definitions:

1. Add the following definitions:
 - a. Cementitious Material: Cementitious materials include cement, ground blast furnace slag and fly ash.
 - b. Corrosion Inhibitor Admixture: A liquid admixture, calcium nitrite that inhibits corrosion of concrete-embedded steel in the presence of chloride ions.



- c. Pumped Concrete: Concrete that is conveyed by pumping pressure through rigid pipe or flexible hose.
- d. Water-to-Cementitious Ratio (w/c): An equational value representing quantity in pounds of free moisture available for cement hydration divided by quantity of cementitious materials in pounds per cubic yard concrete.

1.03 SUBMITTALS

- A. Submittals Package: Submit product data for design mix(es) and materials for concrete specified below at the same time as a package.
- B. Product Data:
 - 1. Mix Design: Submit proposed concrete design mix(es) together with name and location of batching plant at least 28 days prior to the start of concrete work.
 - a. Include test results of proposed concrete proportions based on previous field experience or laboratory trial batches in accordance with ACI 301, Section 4.
 - b. Pumped Concrete: Include test results of proposed design mix(es) tested under actual field conditions with the maximum horizontal run and vertical lift required for this project.
 - c. Form TR-3: Technical Report Concrete Design Mix: The contractor shall be responsible for, and bear all cost associated with the filing and securing of approvals, if any, for Form TR3: Technical Report Concrete Design Mix, including, but not limited to, engaging the service of a New York City licensed concrete testing Lab for the review and approval of concrete design mix, testing, signatures and professional seals, etc., compliant with NYC Department of Buildings requirements, for each concrete design mix. (TR-3 is not required when total placement of concrete is less than 50 cu. Yards).



2. Portland Cement: Brand and manufacturer's name.
3. Air-entraining Admixture: Brand and manufacturer's name.
4. Water-reducing Admixture: Brand and manufacturer's name.
5. High Range Water-reducing Admixture (Superplasticizer): Brand and manufacturer's name.
6. Corrosion Inhibitor Admixture: Brand and manufacturer's name.
7. Accelerating Admixture: Brand and manufacturer's name.
8. Aggregates: Name and location of source, and DOT test numbers.
9. Lightweight Coarse Aggregates: Brand and manufacturer's name.
10. Chemical Hardener (Dustproofing): Brand and manufacturer's name, and application instructions
11. Bonding Agent (Adhesive): Brand and manufacturer's name, and preparation and application instructions.
12. Expansion Joint Fillers: Brand and manufacturer's name.
13. Waterstop: Brand and manufacturer's name, and installation instructions.
14. Emery Aggregate: Brand and manufacturer's name, and application instructions.
15. Integral Water-Repellent Admixture: Brand, manufacturer name, specifications, and application instructions.
16. Welded Wire Fabric
17. Overlaid plyform formwork and formliners



C. Shop Drawings

1. Immediately after award of Contract, prepare shop drawings showing all fabrication dimensions and locations for placing of the reinforcing steel and accessories. Follow detailing recommendations of ACI 315. Shop Drawings are to be prepared by a rebar detailer.
2. Shop drawings will be checked for size of material and spacing by the Commissioner, which shall not render the Engineer responsible for any errors in construction dimensions, quantities, bends, etc. that have been made in preparation of the shop drawings. The Contractor shall assume full responsibility for the correctness of quantities, dimensions and fit.
3. Do not order or deliver reinforcement to job site prior to approval of drawings.

D. Quality Control Submittals:

1. Batching Plant Records: At the end of each day of placing concrete, furnish the Commissioner with a legible copy of all batch records for the concrete placed.
2. Concrete Pumping Equipment Data: Include manufacturer's name and model of principal components, type of pump, and type and diameter of pipe/hose.

1.04 QUALITY ASSURANCE

- A. Concrete batching plants shall be currently approved as concrete suppliers by the New York State Department of Transportation.
- B. Truck mixers for concrete shall be currently approved by the New York State Department of Transportation.
- C. Pumping equipment for pumped concrete shall be subject to the approval of the Commissioner.
- D. Source Quality Control: The Commissioner reserves the right to inspect and approve the following items, at his own discretion, either with his own forces or with a designated inspection agency:
 1. Batching and mixing facilities and equipment.
 2. Sources of materials.



- E Rebar Detailer: Company shall be specialized in the detailing of reinforcing bar shop drawings with a minimum of three years experience.
- F. ACI 301, Section 1.3 Reference standards and cited publications:
 - 1. Add the following to the list of ASTM Standards:
 - a. C 311-77 Standard Methods of Sampling and Testing Fly Ash or Natural Pozzolans For Use As A Mineral Admixture in Portland Cement Concrete.

1.05 DELIVERY

- A. ASTM C 94/C 94M - 04, Article 13.1 - Batch Ticket Information: In addition to the information required by Paragraph 16.1, also include the following:
 - 1. Type and brand, and amount of cement.
 - 2. Weights of fine and coarse aggregates.
 - 3. Class and brand, and amount of fly ash (if any).
- B. Insure proper identification of reinforcement after bundles are broken.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Cement: ASTM C 150, Type I or II Portland cement.
- B. Water: Potable
- C. Air-entraining Admixture: ASTM C 260, and on the New York State Department of Transportation's current "Approved List".
- D. Water-reducing Admixture: ASTM C 494/C 494M - 04, Type A, and on the New York State Department of Transportation's current "Approved List".
- E. High Range Water-reducing Admixture (Superplasticizer): ASTM C 494/C 494M - 04, Type F, and on the New York State Department of Transportation's current "Approved List".
- F. Corrosion-Inhibiting Admixture: ASTM C 494/C 494M - 04, for use in resisting corrosion of steel reinforcement.



1. DCI Corrosion Inhibitor by W. R. Grace & Co., - Conn., 62 Whittemore Ave., Cambridge, MA 02140, (617) 876-1400 and Rheocrete CNI by Master Builders/ BASF Building Systems, 23700 Chagrin Blvd., Cleveland, OH 44122, (800) 628-9990.
 2. DCI - S Corrosion Inhibitor by W. R. Grace & Co., - Conn., 62 Whittemore Ave., Cambridge, MA 02140, (617) 876-1400.
- G. Retarding Admixture: ASTM C 494, Type D, Water-reducing and retarding, for use in hot weather concreting, and on the New York State Department of Transportation's current "Approved List".
- H. Accelerating Admixture: Non-corrosive admixture, containing no chloride, complying with ASTM C 494, Type C or E, and on the New York State Department of Transportation's current "Approved List".
- I. Moisture-Retaining Cover: Waterproof paper, polyethylene film, or polyethylene-coated burlap complying with ASTM C 171.
- J. Chemical Curing and Anti-Spalling Compound: ASTM C-309, Type 1D, Class B, with a minimum 18 percent total solids content. No thinning of material allowed.
1. SureCure Emulsion, Kaufman Products, Inc. 3811 Curtis Avenue, Baltimore, MD 21226, (800) 637-6372.
 2. Cure & Seal by Symons Corp., 200 East Touhy Ave., PO Box 5018, Des Plaines, IL 60017-5018, (847) 298-3200.
 3. Kure-N-Seal by Sonneborn/ BASF Building Systems, 889 Valley Park Dr., Shakopee, MN 55379, (800) 433-9517.
 4. Day-Chem Cure & Seal UV 26 percent (J-22 UV) by Dayton Superior Corp., 721 Richard St., Miamisburg, OH 45342, (800) 745-3700.
 5. Acrylseal HS by Master Builders/ BASF Building Systems, 23700 Chagrin Blvd., Cleveland, OH 44122, (800) 628-9990.
 6. Or approved equal.
- K. Chemical Hardener (Dustproofing): Colorless aqueous solution of magnesium-zinc fluosilicate.
1. Lapidolith by Sonneborn/ BASF Building Systems, 889 Valley Park Dr., Shakopee, MN 55379, (800) 433-9517.



2. Surfhard by The Euclid Chemical Co., 19218 Redwood Rd., Cleveland, OH 44110, (216) 531-9222.
 3. Pena-Lith by W.R. Meadows, Inc., PO Box 543, Elgin, IL 60121, (847) 683-4500.
 4. FluoHard by L & M Construction Chemicals, Inc., 14851 Calhoun Rd., Omaha, NE 68152, (402) 453-6600.
 5. Armortop by Anti Hydro International, Inc., 265 Badger Ave., Newark, NJ 07108, (800) 777-1773.
 6. Diamond by Kaufman Products, Inc., 3811 Curtis Avenue, Baltimore, MD 21226, (800) 637-6372.
 7. Or approved equal.
- L. Type 1 Expansion Joint Filler: Preformed, resilient, nonextruding cork units complying with ASTM D 1752, Type II.
- M. Type 2 Expansion Joint Filler: Preformed, resilient, nonextruding, self-expanding cork units complying with ASTM D 1752, Type III.
- N. Type 3 Expansion Joint Filler: Preformed, resilient, nonextruding bituminous units complying with ASTM D 1751.
- O. Epoxy Bonding Agent (Adhesive): 100 percent solids epoxy-resin-base bonding compound, complying with ASTM C 881, Types I, II, IV and V, Grade 2 (horizontal areas) or Grade 3 (overhead/vertical areas), and Class B (40-60 degrees Fahrenheit) or Class C (60 degree Fahrenheit and above).
1. SurePoxy HM Series by Kaufman Products, Inc., 3811 Curtis Avenue, Baltimore, MD 21226, (800) 637-6372.
 2. Sikadur Hi-Mod 32 by Sika Corporation, 201 Polito Avenue, Lyndhurst, NJ 07071, (800) 933-7452.
 3. Epogrip by Sonneborn/-BASF Building Systems, 889 Valley Park Drive, Shakopee, MN 55379, (800) 433-9517.
 4. Or approved equal.
- P. Emery Aggregate: Natural emery, crushed, polyhedral in shape, with not more than 10 percent flat or elongated pieces, properly screened, graded and packaged in the manufacturer's plant, and delivered to the Site in sealed, labeled packages.



1. Emerundum by Anti Hydro International, Inc., 265 Badger Ave., Newark, NJ 07108, (800) 777-1773.
 2. Non-Slip Aggregate by Setcon Industries, Inc., 5 Mathews Ave., Riverdale, NJ 07457-1020, (201) 283-0500.
 3. Frictex H by Sonneborn/ BASF Building Systems, 889 Valley Park Dr., Shakopee, MN 55379, (800) 433-9517.
 4. Or approved equal.
- Q. Waterstop: Extruded from virgin polyvinyl chloride plastic compound containing no scrap or reclaimed material or pigment.
1. Size: Minimum 6 inches wide by 3/8 inch thick, unless otherwise indicated.
 2. Minimum Tensile Strength (ASTM D 412): 2000 psi.
 3. Minimum Ultimate Elongation (ASTM D 412): 350 percent.
 4. Shore A/10 Durometer Hardness (ASTM D 2240): Minimum 65; Maximum 83.
 5. Maximum 24 Hour Water Absorption (ASTM D 570): 0.15.
- R. Waterstop: Water swelling sealant; minimum 3/4 inch wide by 3/8 inch thick, unless otherwise indicated; minimum tensile strength (ASTM D 412) 100 psi minimum ultimate elongation (ASTM D 412) 500 percent.
1. MC-2010M by Adeka Ultra Seal Corporation, PO Box 459, Spearfish, SD 57783, (605) 642-3959.
 2. Volclay Waterstop RX-101 by Colloid Environmental Technologies Company, Building Materials Division, 1350 W. Shure Drive, Arlington Heights, IL 60004, (708) 392-5800.
 3. Or approved equal.
- S. Expansion Joint Dowels: Smooth steel expansion joint dowel with minimum 5 inch long steel dowel cap, unless otherwise indicated.
- T. Integral Water-Repellent Admixture:
1. Hydrocide Powder by Sonneborn/ BASF Building Systems, 889 Valley Park Drive, Shakopee, MN 55379, (800) 433-9517.
 2. Darapel by W. R. Grace & Co., - Conn., 62 Whittemore Ave., Cambridge, MA 02140, (617) 876-1400.
 3. W.R. Meadows, Hampshire, Il 60140



4. Or approved equal.
- U. Smooth Form Finish Formliner: Shall be #340 Smooth Face by Greenstreak, St Luis Missouri, 63177, Architectural Polymers, New Ringgold PA 17960, Fitzgerald Formliners, Santa Ana CA 92705, or approved equal.
- V. Form Ties: Wire ties not permitted. Form ties for exposed concrete shall be adjustable, leave no metal closer than 1¹/₂" to the surface, and free of devices that leave holes or depressions larger than 7/8" back of exposed surface.
- W. Reinforcing Bars: All reinforcing bars shall be of deformed type of new billet steel conforming to current requirements of ASTM A615 Grade 60. No rail or re-rolled steel will be permitted. For concrete exposed to the elements, reinforcing bars are to be epoxy coated in accordance with ASTM A775.
- X. Welded Steel Wire Fabric: Wire Fabric shall conform to the requirements of ASTM A185. For concrete exposed to the elements, wire mesh shall be epoxy coated in accordance with ASTM A775.
- Y. Supports for Reinforcement: Metal bolsters and chairs of adequate strength, size, and number. Provide CRSI Class C supports (plastic tipped) for formed concrete surfaces and Class A (bright basic) for other conditions. Plastic supports may be used if submitted for approval. Wire bar supports shall be coated with dielectric material for a minimum distance of 2" from the point of contact with the epoxy-coated reinforcing bars.

2.02 PROPORTIONING OF MIXES

- A. Cast-in-place concrete shall be air-entrained normal weight concrete except where lightweight concrete is indicated on the drawings.
1. Normal weight concrete for garage floors, and for exterior slabs, ramps and stairs shall have a minimum compressive strength of 4000 psi, with a minimum of 611 pounds of cement per cubic yard. Slump: Maximum 3 inches; minimum 2 inches before the addition of any water-reducing admixtures or high-range water-reducing admixtures (superplasticizers) at the Site.



2. Optional Material: Fly ash may be substituted for (Portland) cement in normal weight and lightweight concrete up to a maximum of 15 percent by weight of the required minimum (Portland) cement. If fly ash is incorporated in a concrete design mix, make necessary adjustments to the design mix to compensate for the use of fly ash as a partial replacement for (Portland) cement.
 - a. Adjustments shall include the required increase in air-entraining admixture to provide the specified air content.
 - b. Lower early strength of the concrete shall be considered in deciding when to remove formwork.

- B. Slump for Pumped Concrete: When a water-reducing admixture is not used, maximum slump shall be 4 inches. When a water-reducing admixture is used, maximum slump shall be 6 inches and when a high-range water-reducing admixture (superplasticizers) is used, maximum slump shall be 8 inches.

- C. Design Air Content: Design air content for concrete shall be 6 percent by volume, with an allowable tolerance of plus or minus 1.5 percent for total air content, except as otherwise specified. Use air-entraining admixture, not air-entrained cement.

- D. Water-Cement Ratio: Cast-in-place concrete shall have a maximum water-cement ratio of 0.40.

- E. ACI 301, Section 4.2.2.3: Change article to read as follows:
 1. 4.2.2.3 - Size of Coarse Aggregates:
 - a. 4.2.2.3.a Normal Weight Concrete: Coarse aggregates shall conform to graduation requirements for various sizes as tabulated in Table No. 2 of ASTM C 33. The sizes of coarse aggregates for various classes of Work shall be as follows with all percentages being determined by weight.
 - b. 4.2.2.3.b For concrete floors, floor and roof slabs, reinforced beams and girders, columns and piles, concrete encasing underground electric conduits, and concrete in which the space between restricting objects is 2 inches or less, the course aggregate shall be Size No. 67.



- c. 4.2.2.3.c For other concrete Work having a minimum cross-sectional dimension of not more than 6 inches, the coarse aggregate shall be a well graded mixture of No. 67 and No. 57, provided that not more than 50 percent nor less than 30 percent shall be Size No. 67 and not more than 70 percent nor less than 50 percent shall be Size No. 57.
 - d. 4.2.2.3.d For other concrete Work having a minimum cross-sectional dimension greater than 6 inches and not more than 12 inches, the coarse aggregate shall consist of a mixture of No. 67, No. 57 and No. 467, providing that not more than 25 percent nor less than 10 percent shall be Size No. 67 and not more than 40 percent shall be Size No. 467.
 - e. 4.2.2.3.e For other concrete Work having a minimum cross-sectional dimension of more than 12 inches, the coarse aggregate shall consist of a mixture of No. 67, No. 57 and No. 357, providing not more than 25 percent nor less than 10 percent shall be Size No. 67 and not more than 40 percent shall be Size No. 357.
 - f. 4.2.2.3.f Lightweight Concrete:
Lightweight aggregates shall be graded from 3/4 inch to No. 4 sieve size in conformance with Table No. 1 of ASTM C 330.
- F. Admixtures: Do not use admixtures in concrete unless specified or approved in writing by the Commissioner.
- G. ACI 301, Section 4.1.2.1 - Mixture Proportions:
1. Add the following to paragraph 4.1.2.1:
a. Proposed design mix(es) for pumped concrete and the pumping equipment shall have been tested under actual field conditions with the maximum horizontal run and vertical lift required for this project.
- H. Application Rate for Integral Water Repellent Admixture:
1. Hydrocide Powder, 1 lb. for each 94 lb. of cement



2. Darapel, 3 to 6 oz. for each 100 lb. of cement.

2.03 JOINTS

- A. ACI 301, Section 5.3.2.6 - Construction joints and other bonded joints:
 1. Delete the following subparagraphs:
 - a. Use an acceptable adhesive applied in accordance with the manufacturer's recommendations;
 - b. Use an acceptable surface retarder in accordance with manufacturer's recommendations;
 - c. Roughen the surface in an acceptable manner that exposes the aggregate uniformly and does not leave laitance, loosened particles of aggregate, or damaged concrete at the surface; or
 - d. Use Portland-cement grout of the same proportions as the mortar in the concrete in an acceptable manner.
 2. Add the following in place of the above subparagraph:
 - a. The use of bonding agent (adhesive).
 - b. The use of cement grout.
- B. ACI 301, Section 10.2.5 - Isolation-joint filler materials:
 1. Add the following paragraphs:
 - a. Except as otherwise shown on the Drawings, expansion joints shall be as follows:
 - b. In joints required to receive a sealant, the joint filler shall be 1/2 inch thick and recessed as required to form a caulking slot.
 - c. In joints not required to receive a sealant, the joint filler shall be 1/2 inch thick and extend through the full cross-section of the concrete.
 - d. Tool edges of concrete with 1/8 inch radius edging tool.

2.04 PRODUCTION OF CONCRETE

- A. Provide ready-mixed concrete, either central-mixed or truck-mixed, unless otherwise approved in writing by the Commissioner.
- B. ACI 301, Section 5.3.2.1 Weather considerations



1. Delete paragraph under 5.3.2.1.c - Hot Weather, and add the following:
 - a. 5.3.2.1.c Provide adequate controls to insure that the temperature of the concrete when placed does not exceed 90 degrees F., and make every effort to place it at a lower temperature. The temperature of the concrete as placed shall not be so high as to cause difficulty from loss of slump, flash set or cold joints. Ingredients may be cooled before mixing by shading the aggregates, fog spraying the coarse aggregate, chilling the mixing water or other approved means. Mixing water may be chilled with flake ice or well-crushed ice of a size that will melt completely during mixing, providing the water equivalent of the ice is calculated into the total amount of mixing water.
- C. Protect concrete from physical damage or reduced strength due to weather extremes during mixing, placement and curing.
 1. In cold weather, comply with ACI 306R.
 - a. When air temperature is below 40 degrees F (4 degrees C) heat the mixing water and, if necessary, the aggregates to obtain a concrete mixture temperature of not less than 50 degrees F (10 degrees C) and not more than 80 degrees F (27 degrees C) at point of placement. If the mixing water is heated, do not exceed a temperature of 140 degrees F at the time it is added to the cement and aggregates.
 2. In hot weather, comply with ACI 305R.
 - a. When air temperature is between 85 degrees F (30 degrees C) and 90 degrees F (32 degrees C), reduce mixing and delivery time from 1 1/2 hours to 75 minutes, and when air temperature is above 90 degrees F (32 degrees C), reduce mixing and delivery time to 60 minutes.

PART 3 EXECUTION

3.01 EXAMINATION AND PREPARATION



- A. Do not use items of aluminum for mixing, chuting, conveying, forming or finishing concrete, except magnesium alloy tools may be used for finishing.
- B. Check items of aluminum required to be embedded in the concrete and insure that they are coated, painted or otherwise isolated in an approved manner.
- C. Install waterstops in accordance with manufacturer's printed instructions.
- D. Hardened concrete, reinforcement, forms, and earth which will be in contact with fresh concrete shall be free from frost at the time of concrete placement.
- E. Do not deposit concrete in water. Keep excavations free of water by pumping or by other approved methods.
- F. Prior to placement of concrete, remove all hardened concrete spillage and foreign materials from the space to be occupied by the concrete.

3.02 ADMIXTURE ADDITIONS AT THE SITE

- A. Site additions shall be limited to high-range water-reducers, non-chloride accelerators, and corrosion inhibitors. Comply with manufacturers' printed instructions for discharge of admixtures shall be furnished.

3.03 FORMWORK

- A. Provide formwork wherever necessary to confine concrete to the required shapes shown on Drawings. Follow all procedures of Chapter 4 of ACI 301 and ACI 347. Formwork, reinforcement, and embedded items shall be clean of all accumulated mortar from previous concreting and other foreign material. Repair or replace any formwork as required.
- B. Cover the surfaces of the rough or overlaid plyform formwork (when used) with an approved form release agent that will effectively prevent absorption of moisture, prevent bond with the concrete, and which will not stain the concrete surfaces. Do not apply oil or release agents on formwork for concrete to receive additional concrete (such as at construction joints). Apply



at a rate that will help achieve the finish specified below. Follow manufacturer's recommendations.

- C. Adequately support and substantially brace formwork to hold lines and shape. Securely brace forms against lateral deflection. Formwork shall be tight jointed to prevent leakage of concrete.
- D. Place chamfer strips in the corners of forms to produce beveled edges (chamfers) on permanently exposed surfaces and wherever else shown on Drawings.
- E. Provide "Rough Form Finish" for surfaces not exposed to view. Use plywood or metal forms coated with a release agent.
- F. Provide "Smooth Form Finish" for surfaces exposed to view and the elements. Use dress, square-edged lumber with form liner or overlaid plyform forms with applicable release agent. Finish shall be a CS3 surface finish or better as developed by the Cresset Chemical Company.
- F. Remove forms in such a manner as to assure the complete safety of the structure. Formwork not supporting the weight of the concrete may be removed as soon as the concrete has hardened sufficiently to resist damage from removal operations and as required by G below.
- G. When repair of surface defects or finishing is required at an early age, remove forms as soon as the concrete has hardened sufficiently to resist damage from removal operations.

3.04 REINFORCEMENT

- A. Place reinforcement in accordance with CRSI "Placing Reinforcement Bars" and Chapter 5 of ACI 301.
- B. Unless otherwise permitted, welding of crossing bars (tack welding) for assembly of reinforcement is prohibited.
- C. Support and fasten together all reinforcement to prevent displacement by construction loads or placing of concrete.



- D. Lifting of bars and welded wire fabric into position during placement of concrete is not permitted.
- E. Where the concrete surface will be exposed to the weather in the finished structure, the portions of all accessories within 1/2" of the concrete surface shall be non-corrosive or protected against corrosion.
- F. Provide minimum protective cover given in Chapter 7 of ACI 318 if not indicated on Drawings.
- G. All splices not shown on the Project Drawings shall be shown on the shop drawings and approved by the Commissioner.
- H. All embedment lengths not shown on the Project Drawings shall be shown on the shop drawings and approved by the Commissioner.

3.05 FINISHING OF FORMED SURFACES AND REPAIR OF SURFACE DEFECTS

- A. General
 - 1. Remove forms as soon as practicable.
 - 2. Repair surface defects, including tie holes and cracks, immediately after form removal. Patches shall be of quality to match the specified finish.
 - 3. Remove oil, grease, compounds, and other contaminants from surfaces and areas to be repaired.
 - 4. Provide finishes specified below immediately after form removal.
 - 5. Provide curing and protection.
- B. Repair of Surface Defects
Repair surface defects in accordance with subchapter 9.2 of ACI 301. At the Commissioner's discretion, repair mortars and coatings shall be employed to rectify defects. Materials shall be as selected by the Commissioner.
- C. Formed Finishes
 - 1. Smooth Form Finish: Provide for concrete exposed to view. Concrete shall have a CS 3 or better finish as developed by the Cresset Chemical Company and shall have been placed without the need for patching or removal of fins, etc.



- a. Repair concrete surfaces as indicated above.
- b. Chip or rub off fins completely and grind smooth.
- c. Provide smooth rubbed finish as follows:
 - 1) Produce on newly hardened concrete no later than the day following form removal.
 - 2) Wet the surfaces and rub with a No. 16 carborundum brick or other equal abrasive to obtain a smooth, even surface of uniform appearance without applying any cement or other coating.
 - 3) Obtain the final finish by thoroughly rubbing with a No. 30 carborundum brick. The surface shall be wet for a period of 3 days. The Commissioner shall be the sole judge if the finish is proper.

D. Acceptance of Concrete Finish

If the finish produced is not acceptable to the Commissioner, the Contractor shall be responsible for all costs incurred to produce an acceptable finish by whatever means determined by the Commissioner. Remove stains, rust, efflorescence, and other surface deposits to the satisfaction of the Commissioner.

3.06 SLABS

A. Placement

1. Mixing and placing shall be carefully coordinated with finishing. Do not place concrete on the subgrade or forms more rapidly than it can be spread, straightedged, and darbied or bull floated. Provide leveling, floating, troweling, etc. at the correct time interval after pouring to prevent dusting and a non-durable surface as specified in ACI 302.1R. These operations must be performed before bleeding water has an opportunity to collect on the surface.
2. To obtain good surfaces and avoid cold joints, the size of finishing crews shall be planned with due regard for the effects of concrete temperature and atmospheric conditions on the rate of hardening of the concrete.



B. Leveling and Finishing

1. General

- a. Unless otherwise indicated on the Drawings or specified herein, make all slabs even and uniform in appearance and, where no slope is required, level within plus or minus 1/8" in ten feet. All float-finished slabs shall achieve a tolerance of 5/16" in 10 feet and all trowel-finished surfaces shall achieve a tolerance of 1/8" in 10 feet. Tolerance is measured by placing a freestanding 10-foot straight edge anywhere on the slab and allowing it to rest upon two high spots within 72 hours after slab concrete placement. The gap between the straight edge and floor shall not exceed the above-specified tolerance.
- b. Where floor drains or floor slopes are indicated, slope slabs uniformly to provide even fall for drainage.
- c. Follow detailed recommendations for finishing given in ACI 301, Chapter 11, and ACI 302.1R.
- d. Protect finishes from contamination from time of placing until time of acceptance, placement of topping, etc.
- e. Remove defects of sufficient magnitude to show through floor coverings or that do not meet tolerances by grinding.

2. Finishes

- a. Provide monolithic finishes on concrete floors and slabs without the addition of mortar or other filler material. Finish surfaces in true planes, true to line, with particular care taken during screeding to maintain an excess of concrete in front of the screed so as to prevent low spots. Screed and darby concrete to true planes while plastic and before free water rises to the surface. Do not perform finishing operations during the time free water (bleeding) is on the surface.

3.07 CURING AND PROTECTION

- A. Hot Weather Concreting: Comply with ACI 305R whenever the atmospheric temperature or the form surface temperature is at or above 90 degrees F.,



or climatic conditions of wind and/or low humidity will cause premature drying of the concrete.

- B. Curing Temperature: Maintain the temperature of the concrete at 50 degrees F. or above during the curing period. Keep the concrete temperature as uniform as possible and protect from rapid atmospheric temperature changes. Avoid temperature changes in concrete which exceeds 5 degrees F. in any one hour and 50 degrees F. in any 24-hour period.

3.08 TOLERANCES

- A. Construct formwork so that concrete surfaces will conform to the tolerance limits listed in Table 4.3.1 of ACI 301.
- B. Establish and maintain in an undisturbed condition and until final completion and acceptance of the project sufficient control points and bench marks to be used for reference purposes to check tolerances.
- C. Place reinforcing bars in accordance with the tolerances given in paragraph 5.6.2 of ACI 301.
- D. Move bars as necessary to avoid interference with other reinforcement, conduits, or imbedded items. If bars are moved more than one bar diameter, or enough to exceed the above tolerances, the resulting arrangements are subject to approval by the Commissioner.

3.09 CHEMICAL HARDENER (DUSTPROOFING)

- A. Apply chemical hardener to all troweled finished interior floors which are to be left exposed.
- B. Do not apply chemical hardener until concrete has cured the number of days recommended in manufacturer's instructions.
- C. Prepare surfaces and apply chemical hardener in accordance with manufacturer's printed instructions and recommendations.

3.10 FIELD QUALITY CONTROL

- A. ACI 301, Section 1.6.4.2 - Testing Services:
 - 1. Add the following paragraph:



- a. 1.6.4.2.e Strength Tests for Pumped Concrete: Prepare strength test specimens and make strength tests from concrete samples obtained at the truck discharge chute and at the end of the pump delivery line in accordance with paragraph 16.3.4.4.
- B. ACI 301, Section 1.6.3.3 - Tests required of Special Inspection testing agency:
 1. Add the following paragraph:
 - a. 1.6.3.3.c Make available to the Commissioner whatever test samples are required to make tests. Furnish shipping boxes for compression test cylinders.
- C. Adjustment to Concrete Mixes: Mix design adjustments may be requested when characteristics of materials, job conditions, weather, test results, or other circumstances warrant, at no additional cost to the City of New York and as accepted by the Commissioner. Laboratory test data for revised mix design and strength results must be submitted to and accepted by the Commissioner before using in the work.
- D. Test results will be reported in writing to the Commissioner, Ready-Mix Producer, and Contractor within 24 hours after tests. Reports of compressive strength tests shall contain the project identification name and number, date of concrete placement, name of concrete testing service, concrete type and class, location of concrete batch in structure, design compressive strength at 28 days, concrete mix proportions and materials, compressive breaking strength, and type of break for both 7-day tests and 28-day tests.
- E. Nondestructive Testing: Impact hammer, Windsor probe, or other nondestructive device may be permitted but shall not be used as the sole basis for acceptance or rejection.
- F. See Special Inspection Notes on Drawing M-001, Note 2.

END OF SECTION 033000



SECTION 051200
STRUCTURAL STEEL

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 REFERENCES

- A. Except as shown or specified otherwise, the Work of this Section shall meet the requirements of the following:
1. Design, Fabrication, and Erection: "Specification for Structural Steel Buildings; March 9, 2005 by the American Institute of Steel Construction (AISC Specification).
 2. Standard Practice: Fabrication and erection practices shall comply with the "Code of Standard Practice for Steel Buildings and Bridges", March 18, 2005 by the American Institute of Steel Construction (AISC Code).
 3. Welding: Welding shall comply with the provisions of the "Structural Welding Code - Steel, AWS D1.1", by the American Welding Society (AWS Code).
 4. High-Strength Bolting: High-strength bolting shall comply with the "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" approved by the Research Council on Structural Connections of the Engineering Foundation on June 30, 2004 (Specification for Structural Joints).
 5. Cleaning Steel: Comply with the appropriate specifications (SSPC SP-X) by the Steel Structures Painting Council.

1.02 DEFINITIONS

- A. AISC Manual: Where reference is made to the AISC Manual, it shall mean the Manual of Steel Construction, 13th Edition, of the American Institute of Steel Construction.

1.03 REQUIREMENTS FOR CONNECTIONS

- A. General:



1. Except where Type 1 (rigid-frame) or Type 3 (semi-rigid framing) connections are indicated, the design has been prepared on the basis of Type 2 (simple or unrestrained) connections, complying with the provisions of Section A2.2 of the AISC Specification.
 2. Do not use connection details, which depend upon sharing the stress between any combination of high-strength bolts in bearing-type connections and welds.
 3. If the loads are not indicated, use a connection whose capacity is half the total uniform load capacity shown in the "Allowable uniform loads in kips for beams laterally supported" tables in the AISC Manual for the given shape, span, and steel specification of the beam in question, unless otherwise indicated.
 4. Delete Paragraph J 1.9. of the AISC Specification. Whenever axially loaded members are connected by groups of welds or bolts not located symmetrically with respect to the gravity axis or axes of the connected member, the welds or bolts shall resist both the axial load and the moment produced by their eccentricity in the plane of the connection.
 - a. For end connections of axially loaded angles not subject to repeated variation in stress, fillet welds may resist axial load only, with the following limitations: The length of fillet weld at the heel of the angle shall be not less than $1/2$ nor more than $2/3$ of the total length required for the axial load. The length of fillet weld at the toe of the angle shall be not less than $1/3$ nor more than $1/2$ of the total length required for the axial load.
 5. All bolted connections shall have a minimum of two bolts.
- B. Shop Connections:
Unless otherwise indicated, all shop connections shall be welded or high strength bolted. Field connections required to be welded or fully-tensioned high-strength bolted shall meet the same requirements when fabricated in the shop.
- C. Field Connections:
1. The following field connections shall be welded or fully-tensioned high-strength bolted as shown or noted on the Drawings or, when not shown or noted, shall be either welded or fully-tensioned high-strength bolted at the Contractor's option:



- a. Column splices (if needed).
- b. Column bracing.
2. All other bolted field connections need only be tightened to the snug tight condition.
3. When steel members of any cross section are to be spliced by welding in the field, a detailed welding procedure shall be submitted to Commissioner for approval. The procedure shall be detailed on shop drawings, submitted and approved prior to the fabrication of structural steel. The detailed field welding procedure shall include the method of supporting members during welding. All field welded splices shall be subject to non-destructive testing, Radiographic Testing (RT), or Ultrasonic Testing (UT), as determined by Commissioner. Field splice locations, when specifically shown on contract documents, shall not be relocated nor shall splices be added without written approval of Commissioner.

D. Standard Beam Connections:

1. Unless otherwise shown on the Drawings or required in the Specifications, all beam connections shall be framed in accordance with Part 4 of the AISC Manual, with sizes and lengths of angles and welds and with fastener spacing as shown therein.
2. Standard beam connections shown on the Drawings shall be fabricated as detailed. Substitutions will not be approved.

E. High-Strength Bolted Connections (Amendments to the Specification for Structural Joints):

1. In Item 3(b) of the specification, change the second sentence to read, "Burrs shall be removed."
2. In Item 3(c) of the specification, delete the last two sentences, and add the following sentence: "Flame cut surfaces shall be ground smooth."
3. In Item 7(b)(1) of the specification, add the following to the last sentence: ", except that oversize holes shall not be used in connections with galvanized faying surfaces."
4. In Item 7(b)(2) of the specification, add the following to the last sentence: ", except that short slotted holes shall not be used in connections with galvanized faying surfaces when the force on the joint is in a direction other than normal to the axis of the slot."
5. In Item 7(b)(3) of the specification, add the following to the last sentence: ", except that long slotted holes shall not be used in



- connections with galvanized faying surfaces when the force on the joint is in a direction other than normal to the axis of the slot."
6. Change Item 7(c)(3) of the specification to read as follows: "All fully-tensioned high-strength bolts shall have a hardened washer under the element (nut or bolt head) turned in tightening, regardless of the method of tightening."
 7. In Item 8(b) of the specification, change the first sentence to read: "A tension measuring device shall be required at all work sites where fully-tensioned high-strength bolts are being installed."
 8. In Item 8(c) of the specification, delete the second and third sentences and add the following sentence: " The snug-tight condition is defined as the tightness attained by either a few impacts of an impact wrench or the full effort of a worker with an ordinary spud wrench that brings the connected plies into firm contact."
 9. Change the last sentence in Item 8(c) to read, "Unless otherwise required in the Specifications, bolts required to be fully-tensioned shall be identified on the Drawings. All other bolts need only be tightened to the snug tight condition."
 10. In Item 9(b) of the specification, delete "Arbitration" from the heading. Also change the first paragraph to read: "When high-strength bolts have been installed by any of the tightening methods in Item 8(d), the following inspection procedure shall be used.
 11. In Item 9(c) of the specification, delete "arbitration" from the last sentence.
 12. In Item 9 of the specification, the inspection of bolt tightening shall be as specified under Item 9(b). Furnish the calibration device and the inspection torque wrench, and make them available, upon request, to representatives of the State or designated inspection laboratory during the entire period when steel is being fabricated and erected. The inspection torque wrench shall be capable of indicating that the job inspecting torque has been reached by a second method in addition to direct observation of the wrench dial. The inspection wrench calibration and the bolt tightening inspection shall be performed by the Contractor, and shall be witnessed by Commissioner or the designated inspection laboratory.

F. Design, Fabrication and Erection (Amendments to the AISC Specification):



1. In Item A6. of the specification, change "American Welding Society" to "American Welding Society (Latest Adoption Date)". Delete the date from all referenced AWS Codes.
2. In Item J1.8. of the specification, change the last sentence to read: "Weld access holes and beam copes in other shapes shall be ground smooth, but need not be inspected by dye penetrant or magnetic particle methods."
3. In Item J1.12 of the specification, delete "or with A307 bolts" from the second paragraph.
4. In Item J2. of the specification, change the introductory sentence to read: "All provisions of the American Welding Society Structural Welding Code-Steel, AWS D1.1, except Sections 2.3.2.4, 2.5, 8.13.1 and 9, apply to work performed under this Specification."
5. In Item J3.2.c of the specification, change the first sentence to two sentences as follows: "Oversized holes are permitted in any or all plies of slip-critical connections, except those with galvanized faying surfaces. Oversized holes shall not be used in slip-critical connections with galvanized faying surfaces, or in bearing-type connections."
6. In Item J3.2.d. of the specification, change the second sentence to two sentences as follows: "Short-slotted holes are permitted without regard to direction of loading in slip-critical connections, except those with galvanized faying surfaces. The length of the slot shall be normal to the direction of the load in slip-critical connections with galvanized faying surfaces and in bearing-type connections."
7. In Item J3.2.e of the specification, change the second sentence to two sentences as follows: "Long-slotted holes are permitted without regard to direction of loading in slip-critical connections, except those with galvanized faying surfaces. The length of the slot shall be normal to the direction of the load in slip-critical connections with galvanized faying surfaces and in bearing-type connections."
8. In Item M2.2. of the specification, delete the first two paragraphs.
9. In Item M2.5. of the specification, change the second sentence of the fifth paragraph to read: "Burrs shall be removed."
10. Delete Item M4.5. of the specification in its entirety.



11. In Item M5.4. of the specification, delete "Slip-critical" from the heading and delete "slip-critical" from the first sentence.
- G. Fabrication and Erection (Amendments to the AISC Code):
1. In Item 4.1. of the code, delete the last sentence of the first paragraph.
 2. In Item 5.1. of the code, change the first paragraph to read: "Contract Drawings are not considered released for construction. Orders for materials may be placed only after approval of erection drawings or written approval of Commissioner."

1.04 SUBMITTALS

- A. Shop Drawings: Submit shop drawings for all structural steel required by this Contract. Machine-duplicated copies of Contract Drawings will not be accepted as shop drawings. Shop drawings shall be standard 24 by 36 inch size sheets, except that erection drawings may be larger. The margin line shall be drawn a minimum of 1/2 inch from edge of sheet. The title block shall be placed in the lower right hand corner of the drawing, and shall contain the fabricator's name, address, and telephone number. Failure to submit legible drawings of required size will be cause for their disapproval without review. If the drawings are not prepared by a detailer under the direct control of the fabricator, the fabricator shall stamp each drawing and initial or sign the stamp to certify review and approval of the drawings, and conformance with the fabricator's shop practice and capability.
1. Include the following in the initial submission:
 - a. Drawings of proposed job standards for shop and field connections, including standard and special connections, complying with the requirements.
 2. Do not submit detail drawings, other than for anchor bolts and base plates, until after approval of the job standards and the erection drawings.
 3. Include the following in subsequent submissions:
 - a. Index sheets and revised erection drawings to which erection marks have been added.
 - b. Detail drawings of all structural members.
 4. Indicate all required shop and field welds by Standard AWS Welding Symbols in accordance with AWS A2.4.
 5. Indicate shop painting requirements.



6. When shop drawings are marked "Approved as Noted", promptly resubmit copies of corrected shop drawings for formal approval and record.
7. Contract Drawings are not considered released for construction. Orders for materials may be placed only after approval of erection drawings or written approval of Commissioner.

B. Product Data:

1. Shop Paint: Manufacturer's name and printed product literature, including storage and application instructions.

C. Quality Control Submittals:

1. Test Reports: Submit 3 copies of each of the following:
 - a. Steel manufacturer's mill test reports, covering physical and chemical tests, for all main material.
 - b. Bolt manufacturer's test reports, covering physical and chemical tests, for each lot of high strength bolts supplied.
 - c. Test reports shall be submitted no later than the end of the week covered by the reports.
2. Certificates: Whenever any structural steel items other than main members, such as anchor bolts, base plates and detail material, are supplied either from plant stock or from a warehouse, submit 3 copies of evidence of compliance of the material with the applicable requirements of this Specification. Such evidence shall consist of certification as to the source of the material and copies of purchase orders, manufacturer's certifications or, in the case of stock material, copies of the latest mill orders or purchase orders for routine replacement of such stock material.
3. Fabricator's and Erector's Qualifications Data: Name and experience of fabricator and erector.
 - a. Include a summary of their QC programs.
4. Welding Procedure Specifications: Submit procedure specifications for each joint to be welded by submerged arc welding.
5. Welder's Certification: Submit each welder's welding certification to Commissioner for each type weld and position before fabrication.
6. Certification of Fabrication: At completion of fabrication the approved fabricator shall submit a certificate of compliance to the code enforcement official stating that the work was performed in



accordance with the approved construction documents.

1.05 QUALITY ASSURANCE

- A. Fabricator's Qualifications: The fabricator of the structural steel shall be regularly engaged in the fabrication of structural steel, and shall be subject to the approval of Commissioner. AISC Quality Certified Fabricators (latest list issued) are approved.
- B. Erector's Qualifications: The structural steel erector shall be regularly engaged in the erection of structural steel, and shall be subject to the approval of Commissioner.
- C. Welders' Qualifications: Welding shall be performed only by welders, welding operators, and tackers who have been qualified by tests as prescribed in the AWS Code to perform the type of welding required.
- D. Do not deviate from the requirements of the Contract Documents except where an option is specifically mentioned. Commissioner, however, may accept deviations proposed by the Contractor when it is deemed in the best interest of City of New York and if the deviations are consistent with sound and accepted engineering practice. Requests for deviations shall be made prior to the submission of shop drawings to preclude delay in the expeditious preparation and approval of the required shop drawings. In addition, design calculations or other data may be required to establish conformity of such deviations with the applicable Standards.
- E. Galvanizing: Stamp galvanized items with galvanizer's name, weight of coating, and applicable ASTM number.
- F. Pre-Fabrication Meeting: A minimum of 14 days prior to the initial submission of affidavit of acceptance, a meeting will be held at the Site for the purpose of reviewing the Contract Documents, and discussing the requirements and procedures for submittals and for the Work. The meeting will be conducted by Commissioner. The Contractor and the fabricator's project coordinator and certified welding inspector must attend the meeting.

1.06 INSPECTION



- A. Quality Control Inspection: Maintain Quality Control (QC) inspection during the fabrication and erection of structural steel.
1. Submit for approval a summary of the QC programs of the proposed fabricator and erector. Failure to obtain approval of the QC programs will result in rejection of the proposed fabricator and erector. AISC Quality Certified Fabricators submit copy of QC Certificate (Submission of QC program summary is waived).
 2. Inspection shall be done by an American Welding Society Certified Welding Inspector (CWI). If the fabricator and/or the erector find necessary to temporarily employ an independent CWI, they shall submit the name to the Commissioner for approval.
 3. The fabricator's CWI shall make minimum QC inspections as follows and shall prepare daily reports of such inspections:
 - a. At the start of fabrication to review welder qualifications, welding procedure specifications and qualifications, welding equipment and consumables, structural steel identification and tracking procedures and to perform all other CWI duties appropriate to start up of the specific project.
 - b. Periodically during the preparation and fit up of material for groove welding.
 - c. At all times that full penetration groove welding is being performed.
 - d. As necessary to ensure that all welding related requirements of this section are being complied with.
 - e. Minimum QC inspection time by the CWI shall be one-half day every other day that any welding related structural steel fabrication is being performed.
 4. The erector's CWI shall make minimum QC inspections as follows, and shall prepare daily reports of such inspections:
 - a. Prior to commencement of field welding operations to review welder qualifications, welding procedure specifications and qualifications, welding equipment and consumables and to perform all other CWI duties appropriate to start up of field welding for the specific project.
 - b. Periodically during fit-up of material for full penetration groove welds.
 - c. At all times that full penetration groove welding is being performed.



- d. As necessary to ensure that all welding related requirements of this section are being complied with.
 - e. Minimum QC inspection time shall be one-half day on at least three separate days for every week that any structural steel field welding is being performed. This minimum time may be reduced if, in the opinion of Commissioner, such reduction is appropriate.
- B. Quality Assurance (QA) inspection of structural steel fabrication and field welding and high-strength bolting may be made at the discretion of the City of New York. The qualification of welding procedures, welders, and tackers will be covered by such QA inspection. Commissioner and/or designated inspection laboratory shall be given free and easy access to fabrication shop and field at all times that work is in progress. QA inspections will be made without cost to the Contractor.
1. If QA inspection is made by City of New York, it shall not relieve the Contractor, fabricator, and erector of responsibility for their own QC programs.
 2. When QA inspection is made by City of New York, schedule and perform the Work as required to minimize the cost to the NYC for QA inspection.
 3. When non-destructive testing, Radiographic Testing (RT) or Ultrasonic Testing (UT), is required by the contract documents, it shall be performed by City of New York or its designated inspection laboratory.
 4. Keep copies of the results of welder qualification test on file and make them available to the QA inspector upon request.
 5. Do not ship structural steel, except anchor bolts and base plates, from the fabricating shop prior to QA inspection and approval by City of City of New York or designated inspection laboratory, unless such inspection is waived by City of New York. A waiver of prior QA inspection and approval shall not reduce the Contractor's responsibility to provide structural steel in conformance with the Contract Documents.

1.07 WELDING PROCESSES

- A. Use only shielded metal arc welding.

1.08 WELDING PROCEDURE QUALIFICATION



- A. Shielded metal arc welding procedures, which conform to the provisions of the AWS Code, shall be considered to be prequalified.
- B. The welding procedures for submerged arc and flux cored arc welding shall be qualified in accordance with the following subparagraphs. Welding, specimen preparation, specimen testing, and test results required shall be in accordance with Procedure Qualification Sheets A thru F. Welding and machining shall be at the fabricator's expense. Prepared specimens shall be turned over to City of New York for testing.
 - 1. For welding procedures not previously approved by City of New York, the test plate and required specimens shall be as shown on Procedure Qualification Sheet A.
 - 2. For welding procedures previously approved by City of New York, the test plate and required specimens shall be as shown on Procedure Qualification Sheet B.
 - 3. To qualify a fillet welding procedure, the requirements of the appropriate foregoing subparagraph shall be met. In addition, a T-test fillet weld shall be made and tested in accordance with paragraph 5.10.3.1 of the AWS code.
- C. Procedure Qualification Sheets A thru F will be supplied to the Contractor upon request.

1.09 DELIVERY, STORAGE, AND HANDLING

- A. Deliver epoxy anchor bolts and other devices, which are to be embedded in cast-in-place concrete or masonry construction, for anchorage of structural steel, one week prior to the start of that Work, unless otherwise required.
- B. Receiving Shop Paint: Receive paint in original, unopened containers bearing paint manufacturer's printed label.
 - of paint, Federal Specification compliance (if applicable), shelf life, and date of manufacture.
- C. Protection:
 - 1. Upon delivery to the site, promptly cover and protect steel items (which are not required to receive shop paint) from rusting.



2. Store shop paint in accordance with paint manufacturer's printed instructions.

1.10 ENVIRONMENTAL REQUIREMENTS FOR SHOP PAINTING

- A. Comply with the following conditions for the application of paint unless otherwise stated in the paint manufacturer's printed directions.
 1. Minimum ambient, steel surface, and paint temperatures: 40 degrees F.
 2. Maximum steel surface temperature: 100 degrees F.
 3. Maximum relative humidity: 85 percent.
 4. Surface of steel: Dry.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Structural Steel for W-shapes: ASTM A992, Grade 50.
- B. Structural Steel for Channels, Angles, Plates, & Miscellaneous Steel: ASTM A36.
- C. Steel for Anchor Bolts, Tie Rods, Sag Rods, and other Detail Material Not Proportioned for Calculated Stress: ASTM A36; or ASTM A675, Grade 70.
- D. Steel for Shims and Fillers: ASTM A569.
- E. High-Strength Threaded Fasteners (High-Strength Bolts): ASTM A325 heavy hexagon structural bolts, nuts, and hardened washers.
- F. Steel Pipe: ASTM A53, Type E or S, Grade B.
- G. Weld Filler Metal:
 1. General: Weld filler metal shall be in accordance with Table 4.1.1 of the AWS Code, except as follows:
 - a. Only electrode and flux combinations complying with AWS Classifications F7AX-EXXX or F7AX-EXXX-a, (a = B2, Ni1, Ni2, Ni3 or W), shall be used for submerged arc welding.
 - b. Only electrode and shielding gas combinations complying with AWS Classifications E 7XT-1 or E 7XT-5 shall be used for flux cored arc welding.



2. Weld filler metal for shielded metal arc welding which conforms to AWS Specifications A5.1 or A5.5 shall be considered to be prequalified.
 3. Weld filler metal for submerged arc and flux cored arc welding shall be qualified by performing the procedure qualification tests required under Part 1 of this Section.
- H. Shop Paint (General): Steel primer selected from the following:
1. TNEMEC 10-99 (Red), 10-99G (Green) or 10-1009 (Gray).
 2. Rust-Oleum 769.
 3. Valspar 13-R-53.
 4. Sherwin-Williams "Kromik".
 5. or approved equal.
- I. Bedding Mortar:
1. Shrink-Resistant Grout (Ferrous): Factory-packaged, non-catalyzed, ferrous aggregate mortar grouting compound selected from the following:
 - a. Embeco 636 by Master Builders, 23700 Chagrin Blvd., Cleveland, OH 44122 (800) 227-3350.
 - b. Ferrolith G-NC by Sonneborn, Chemrex, Inc., 57-46 Flushing Ave., Maspeth, NY 11378, (800) 433-9517.
 - c. Ferro-Grout by L&M Construction Chemicals, 14851 Calhoun Rd., Omaha, NB 68152, (800) 362-3331.
 - d. Vibra-Foil by A.C. Horn, Inc., Tamm Industries, 7405 Production Dr., Mentor, OH 44060, (800) 862-2667.
 - e. or approved equal

2.02 FABRICATION

- A. Do not commence fabrication until the fabricator has been approved and the fabrication schedule has been coordinated with the designated Quality Assurance inspection agency (independent inspection laboratory or the State).
1. Give Commissioner one week advance notice of the commencement of fabrication.
- B. Progress shop fabrication from "Approved" or "Approved as Noted" detail drawings only.
1. When detail drawings are "Approved as Noted", progress fabrication in strict accordance with notes thereon.



2. Fabrication progressed from "DISAPPROVED" or "RETURNED FOR CORRECTION" detail drawings will be rejected. The contractor shall have no claim against the State for any costs or delays due to rejection of items fabricated from "DISAPPROVED" or "RETURNED FOR CORRECTION" detail drawings.
- C. Finish column ends at base plates and at load carrying cap plates to a true plane square to the column, with a maximum American National Standards Institute surface roughness value of 500 micro inches.
- D. Pipe Columns: Cap columns with a closure plate shop welded to the top of the columns to exclude water and foreign material from entering the column.
- E. Make provision for connections of other Work; including all cutting and punching of structural members where required by the Drawings; or for which information is furnished prior to approval of the shop drawings.
- F. Remove extension bars or run-off plates upon the completion and cooling of groove welds. Grind the ends of the welds smooth and flush with the edges of the abutting parts.
- G. Remove tack welds not incorporated into the final weld, and temporary welds. Grind affected surfaces smooth and flush.
- H. Detail all fillet welded joints so as to permit the welding electrode or wire to be positioned at a minimum angle of 30 degrees from the face of any material upon which weld metal is to be deposited.
- I. Prepare material in accordance with Section 3 of the AWS Code. Do not use gas or air carbon-arc cutting to cut or enlarge bolt holes.

2.03 GALVANIZING

- A. Unless otherwise specified or noted, items indicated to be galvanized shall receive a zinc coating by the hot-dip process, after fabrication, complying with the following:
 1. ASTM A 123 for plain and fabricated material.
 2. ASTM A 153 for iron and steel hardware.



2.04 SHOP PAINTING

- A. Thoroughly clean all structural steel. Remove oil, grease, and similar contaminants in accordance with SSPC SP-1 "Solvent Cleaning". Remove loose mill scale, loose rust, weld slag and spatter, and other detrimental material in accordance with SSPC SP-2 "Hand Tool Cleaning", SSPC SP-3 "Power Tool Cleaning", SSPC SP-6 "Commercial Blast Clean" or SSPC SP-7 "Brush-Off Blast Cleaning".
1. Thoroughly clean structural steel receiving sprayed-on fireproofing in accordance with recommendations of the manufacturer of the fireproofing material approved for use on this Project.
- B. Coordinate shop paint to be applied on steel receiving sprayed-on fireproofing with the manufacturer of the fireproofing material approved for use on this Project.
- C. Galvanized Items:
1. Galvanized items which are to be finish painted shall be rinsed in hot alkali or in an acid solution and then in clear water.
 2. Welded and abraded galvanized surfaces shall be wire brushed and repaired with a coating of cold galvanizing compound applied in accordance with compound manufacturer's instructions.
- D. Apply one coat of shop paint to all steel surfaces except as follows:
1. Do not paint steel members designated "NP" on the Drawings.
 2. Paint steel surfaces scheduled to be painted that are inaccessible after assembly, except surfaces in contact, with two coats of shop paint before assembly.
 3. Do not paint steel surfaces to be field welded, contact surfaces of high-strength bolted slip-critical connections, and steel receiving sprayed-on fireproofing.
 4. Do not paint galvanized items which are not to be finish painted.
- E. Apply paint and compound to the following minimum thickness per coat:
1. Shop Paint (General): 4.0 mils wet film.
 2. Shop Paint for Galvanized Steel: 3.0 mils wet film.
 3. Cold Galvanizing Compound: 2.0 mils dry film.



4. Shop Paint for Steel to receive Sprayed-On Fireproofing: Follow manufacturer's recommendations.

PART 3 EXECUTION

3.01 ERECTION

- A. Erect steel in accordance with the AISC Specification, the AISC Code, the AWS Code and the Specification for Structural Joints, except as otherwise specified.
- B. Prepare and place shrink-resistant grout in accordance with grout manufacturer's printed instructions.
 1. Comply with manufacturer's instructions for preparation of surfaces in contact with the grout, and for curing and protection of the grout.
- C. Install and inspect steel studs in accordance with Section 7 of the AWS Code.
- D. Remove extension bars and run-off plates upon the completion and cooling of groove welds. Grind the ends of the welds smooth and flush with the edges of the abutting parts.
- E. Remove tack welds not incorporated into the final weld, and temporary welds. Grind affected surfaces smooth and flush.
- F. Delete Paragraph M2.2 of the AISC Specification. Prepare material in conformance with Section 3 of the AWS Code. Do not use gas or air carbon-arc cutting to cut or enlarge bolthole.
- G. Do not make corrections or alterations to fabricated steel without prior written approval by Commissioner.

3.02 SCHEDULE OF GALVANIZED STRUCTURAL STEEL

- A. In addition to members indicated on the Drawings, hot-dip galvanize structural steel members as indicated below:
 1. All exterior exposed steel.
- B. Two shop coats of High-Ratio Water Based Zinc Silicate paint may be substituted in lieu of hot-dip galvanizing.

END OF SECTION 051200



SECTION 07 01 50

PROTECTION OF MEMBRANE ROOFING

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 RELATED WORK SPECIFIED ELSEWHERE

- A. Sheet Metal Flashing and Trim: Section 076200.

1.02 SYSTEM DESCRIPTION

- A. The Work of this Section consists of minor modifications to the existing warranted roof system.
1. Existing Type of Roof System: Built Up Bituminous Roofing System.
 2. Existing Roof System Manufacturer: Johns Manville. Should membrane roofing to be replaced prior to the beginning of HVAC project, materials and other provisions of this section shall comply with requirements for installed warranted system.

1.03 SUBMITTALS

- A. Submittals Package: Submit the product data and quality control submittals specified below at the same time in one complete package. Partial submittal will not be considered.
- B. Product Data:
1. Membrane manufacturer's installation instructions and details for the Work of this Section.
 2. Manufacturer's data sheets for all materials required for the Work of this Section.
- C. Quality Control Submittals:
1. Applicator's Certification: Letter from the existing roof system manufacturer certifying that the applicator is licensed or approved to perform the Work of this Section.



2. Material Certification: Letter from the existing roof system manufacturer certifying that the materials used for the Work of this Section are approved for use with the existing system.
3. Warranty Certification: Letter from the existing roof system manufacturer certifying that the Work of this Section will not modify or void the existing warranty.

1.04 QUALITY ASSURANCE

- A. Applicator's Qualifications: The contractor or subcontractor performing the work of this section must, within the last three (3) consecutive years prior to the bid opening.
- B. Material Certification: The materials used for the Work of this Section shall be approved by the existing roof system manufacturer.
- C. Warranty Certification: The Work of this Section shall not modify or void the existing roof system warranty.
 1. Patching and flashing of existing membrane roofing shall be warranted for 5 years.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to the site in the manufacturer's labeled, unbroken containers.
- B. Storage and Handling: Store materials in a dry, well ventilated place protected from the weather.
 1. Volatile liquids shall be stored in a separate storage building or trailer, or removed from the Site at the end of each work day.
 2. Store volatile liquids at temperatures recommended by the manufacturer.
 3. Store adhesives at temperatures between 60 degrees F and 80 degrees F.

1.06 PROJECT CONDITIONS

- A. Do not execute the Work of this Section without written notice from the Commissioner.
- B. Do not execute the Work of this Section unless the substrate is dry and free of dirt and debris.



- C. Moisture Protection:
 - 1. Cover, seal or otherwise protect the roof and flashings so that water cannot accumulate or flow under completed portions. When and where necessary to accomplish this, provide temporary water cut-offs in accordance with the membrane manufacturer's written specifications.
 - 2. Limit the removal of existing materials to areas that can be completely re-roofed or temporarily protected within the same day.
- D. Do not smoke or use open flames near volatile materials.

PART 2 PRODUCTS

2.01 MATERIALS

- A. Provide all the materials required to complete the Work of this Section. All materials shall be approved by the existing roof system manufacturer.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install the Work of this Section as shown on the Contract Drawings and in accordance with the existing roof system manufacturer's written instructions.
 - 1. Install the Work of this Section so that the watertight integrity of the existing system is not compromised.

END OF SECTION 070150



THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 076200
SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Repair existing flashing or install new flashing at Rooftop Packaged Units, provide new flashing in gas pipe roof penetrations, provide flashing enclosure for Acoustical Barrier supporting Curbs and at new Pitch Pockets as shown on the drawings and indicated herein.

1.02 REFERENCES

- A. References and industry standards listed in this Section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications, the recommendations, suggestions, and requirements described in the referenced standards shall be deemed mandatory and applicable to the Work.
- B. Sheet Metal and Air Conditioning Contractors National Association (SMACNA).
- C. Copper Development Association (CDA).
- D. American Society for Testing and Materials (ASTM).
- E. Federal Specifications (FS).

1.03 QUALITY ASSURANCE

- A. Except as otherwise shown or specified, comply with applicable recommendations, details, and standards of CDA, and SMACNA.
- B. All metal Work shall be ink-stamped at intervals, identifying
Manufacturer, type metal, and gage or thickness.
- C. Manufacturer's Recommendations



For factory fabricated items, follow the manufacturer's recommendations and installation instructions unless specifically shown or specified otherwise.

D. Materials containing asbestos are prohibited.

1.04 DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products of this Section in such manner to protect them from damage.

1.05 PROJECT CONDITIONS

A. Do not execute the Work of this Section unless the Commissioner is present, and unless otherwise directed.

B. Make the roof and all uncompleted flashings watertight at the end of each work day.

1.06 GUARANTEE

A. The Contractor shall provide a two (2) year written warrantee, covering the flashing and sheet metal materials and workmanship. Should any defects occur during the stated period, they shall be corrected immediately, and all damage caused by such defects shall be corrected; all corrective Work shall be at the Contractor's expense.

PART 2 - PRODUCTS

2.01 MATERIALS FOR FLASHING FABRICATION

A. Stainless steel Sheet

Dead soft fully annealed stainless steel sheet, ASTM A240, Type 316, sulfur content .005 or less, 2D dull finish.

B. Sheet Lead

ASTM B29. Minimum Wgt. 4 lbs per sq ft.

2.02 MISCELLANEOUS MATERIALS

A. Solder



Composition of block tin/pig lead of proportion recommended by the metal manufacturer, stamped either 50/50 or 60/40 "Warranted".

B. Flux

Paste or acid type as recommended by the metal manufacturer.

C. Bituminous Coating: FS TT-C494.

D. Type 3 Sealant (For concealed sealant joints of thru-wall cap receivers and other areas which require concealed sealant).

One part butyl rubber sealant; Pecora BC-158, PTI 707, Woodmont chem-Calk 300, or approved equal.

E. Flashing Sealants, Cements, Mastics, and Adhesives

Provide products recommended in writing by the flashing manufacturer, and compatible with all adjacent materials, including components of the air barrier system. Materials containing asbestos are prohibited.

1. Where low modulus silicone sealant is indicated provide ASTM C 920, single-component, neutral-curing silicone; Class 100/50, Grade NS, Use NT, Use O.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Coordinate the work of this Section with other Work for the correct sequencing of items which make up the entire system of weatherproofing or waterproofing.

3.02 PREPARATION

- A. Do not install the Work of this Section unless all necessary nailers, blocking and other supporting components have been provided.
- B. Do not install the Work of this Section unless all substrates are clean and dry. Do not cover air barrier membrane until the completion of a curing period if recommended by the membrane manufacturer.



3.03 INSTALLATION

A. Follow manufacturer's recommendations.

END OF SECTION 076200



SECTION 078400

FIRESTOPPING/SMOKE SEALS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide firestopping at all penetrations and juncture joints of fire-rated walls, floors and ceilings in accordance with the requirements of the Building Code of the City of New York and BSA or MEA Standards
- B. Firestopping and Smoke Seals shall be provided, but not limited to the following specific locations:
 - 1. Penetrations for the passage of conduit, piping and electrical busways and raceways through fire-rated vertical barriers (walls and partitions), horizontal barriers (floor slabs and floor/ceiling assemblies), and vertical service shafts.
 - 2. Locations shown specifically on the Drawings.

1.02 REFERENCES

- A. References and industry standards listed in this Section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications, the recommendations, suggestions, and requirements described in the referenced standards shall be deemed mandatory and applicable to the Work.
 - 1. American Society for Testing and Materials (ASTM)
 - 2. Underwriters Laboratories, Inc. (UL)
 - 3. National Fire Protection Association (NFPA)
 - 4. Warnock Hersey



1.03 SUBMITTALS

- A. Submit shop drawings of each firestopping or smoke seal system to be installed in the project.
- B. Submit manufacturer's product data including instructions for installing firestopping and smoke seals.
- C. Submit manufacturer's certifications that materials and systems meet or exceed the specified requirements.
- D. Submit certification stating that firestopping and smoke seals have been completed in full accordance with requirements of this Section and of the Building Code of New York City.
- E. Submit MEA or BSA approval certification for materials and each firestopping or smoke seal system used.

1.04 QUALITY ASSURANCE

- A. All firestopping Work shall be performed by a Subcontractor who will be properly trained by the firestopping manufacturer in the application of its products and systems.
- B. Manufacturer
Minimum of 3 years successful experience in manufacture of firestopping material.
- C. Regulatory Requirements
Conform to U.L. requirements and to requirements of the Building Code of the City of New York and Materials and Equipment Acceptance (MEA) Standards.
- D. Comply with the following for firestopping that is required to be in compliance with 27-345 of the New York City Building Code:
 1. ASTM E84 - Surface Burning Characteristics of Building Materials.
 2. ASTM E814 - Fire Tests of Through Penetration Firestops.
 3. U.L.-1479 - Fire Tests of Through-penetration Firestops.



4. U.L.- Fire Resistance Directory; Through-Penetration Firestop Systems (XHEZ), and Fill, Void or Cavity Materials (XHHW).
5. U. L. 723 - Standard Test Method for Surface Burning Characteristics of Building Materials.

1.05 SYSTEM DESCRIPTION

A. Technical Requirements

1. Firestopping materials shall be UL Classified as "Fill, Void or Cavity Material" for use in Through-Penetration Firestop Systems.
2. Firestop Systems shall provide a fire resistance rating at least equal to the hourly resistance rating of the fire-rated barrier and resist passage of smoke and other gases.

1.06 DEFINITIONS

- A. Penetration: Any opening or foreign material passing through or into a fire-rated barrier.
- B. Fire-Rated: Have the ability to withstand the effects of a standard fire exposure for a specified time period, as determined by qualified testing.
- C. Fire-Rated Barrier: A floor, wall, partition or floor-ceiling assembly able to withstand a standard fire and hose stream test without failure.
- D. Fire resistance rating: The ability of a structure to act as a barrier to the spread of fire and to confine it to the area of origin. Ratings are expressed in hours and apply to beams, columns, floors, ceilings, roofs, walls and partitions.
- E. Firestopping: A means of sealing openings in fire-rated barriers to preserve or restore the fire resistance rating.
- F. Firestop System: A material, or combination of materials, installed to retain the integrity of fire-rated construction by maintaining an effective barrier against the spread of flame, smoke or gases through penetrations in fire-rated barriers.

1.07 MANUFACTURER'S CERTIFICATION



- A. Manufacturer shall provide written certification stipulating that its products and systems used in this Project, if installed in accordance with the manufacturer's recommendations, shall provide the firestopping specified in this Section, as indicated.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Hilti Construction Chemicals, Inc., Tulsa, OK.
- B. The Carborundum Company, Niagara Falls, NY.
- C. 3M Fire Protection Products, St. Paul, MN.
- D. Bio Fireshield, Inc., Concord, MA
- E. Tremco Sealant Division, Tremco LTD, Toronto, Ontario, Canada.
- F. Specified Technologies, Inc., Somerville, NJ
- G. W. R. Grace & Co., Macungie, PA
- H. RectorSeal Corp., Houston, TX
- I. or approved equal.

2.02 MATERIALS

- A. Grout and sealant systems shall meet or exceed requirements as specified in Part 1 of this Section.
- B. Firestopping systems shall meet the requirements of ASTM E-814, which include, but are not limited to, the following:
 - 1. Prevent flame pass-through.
 - 2. Restrict temperature to not exceed 325 degrees F over ambient on side of assembly opposite flames.
 - 3. Provide a positive smoke seal.
 - 4. Withstand hose stream test.
- C. Firestopping materials shall be asbestos-free, emit no toxic or combustible fumes and be capable of



maintaining an effective barrier against flame, smoke, gas, and water in compliance with requirements of this Section.

- D. Firestopping materials/systems shall be flexible to allow for normal movement of building structure and penetrating items(s) without affecting the adhesion or integrity of the system.
- E. Firestopping materials shall not require hazardous waste disposal of used containers/packages.
- F. On insulated pipe, the fire-rating classification must not require the removal of the insulation.
- G. Firestopping materials shall be free of solvents and shall not experience shrinkage while curing.
- H. Product names - per manufacturer instruction for UL approved firestopping system applicable for specific field conditions.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine and confirm the compatibility of surfaces to receive firestopping materials. Verify that surfaces are sound, clean and dry and are ready to receive the firestopping.
- B. Verify that penetration elements are properly located and securely fixed, with the proper space between the penetration element and surfaces of the opening.

3.02 PREPARATION

- A. Protect adjacent surfaces and equipment from damage.
- B. Clean surfaces of opening.

3.03 INSTALLATION

- A. Install firestopping system in strict accordance with the manufacturer's instructions to obtain the fire-rating required at the specific location.
- B. Provide escutcheons for piping at each side of penetration.



3.04 FIELD QUALITY CONTROL

- A. Inspect all installations to ensure that all work meets the requirements specified.

3.05 CLEANING

- A. Remove excess materials, droppings, and debris; remove excess materials from adjacent surfaces.

3.06 PROTECTION

- A. Protect firestopping installations from damage until completion of all Project Work.

END OF SECTION 078400



SECTION 079200

JOINT SEALERS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

A. Provide all joint sealer Work as indicated on the Drawings, as required for the completed Work, and as specified herein. This Section includes joint sealers for the following applications:

1. Exterior joints in the following vertical surfaces:
 - a. Perimeter joints between unit masonry, stone cladding and frames of louvers.
2. Interior joints in the following vertical surfaces:
 - a. Perimeter joints of exterior openings where indicated.

1.02 REFERENCES

A. References and industry standards listed in this Section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications, the recommendations, suggestions, and requirements described in the referenced standards shall be deemed mandatory and applicable to the Work

1. American Society for Testing and Materials (ASTM)

1.03 SUBMITTALS

- A. Product Data:
Catalog sheets, specifications, and installation instructions for each product specified.
- B. Samples for Initial Selection:
For use around windows and at relieving angles, Colors of Exposed Joint Sealants: Match Commissioner's samples.



- C. Samples for Verification:
For each type and color of joint sealant required, provide Samples with joint sealants in 1/2" (13mm) wide joints formed between two 6" (150mm) long strips of material matching the appearance of exposed surfaces adjacent to joint sealants
- D. Quality Control Submittals
1. Product Certificates: For each type of sealant and accessory, signed by product manufacturer.
 2. Installer's Qualifications Data: Affidavit required under Quality Assurance Article.
 3. Company Field Advisor Data: Name, business address, and telephone number of Company Field Advisor.
 4. Test Results
 - a. Sealant manufacturer's test reports certifying compatibility with all contiguous materials.
 - b. Sealant manufacturer's test reports certifying that the sealant will not stain contiguous materials.
 - c. The results of field adhesion testing.
- E. Low Emitting Materials Compliance Submittals
1. Provide documentation for each sealant, sealant primer and cleaner to be used on site indicating that the sealants and primers with V.O.C. requirements.

1.04 QUALITY ASSURANCE

A. Installer's Qualifications

Sealant manufacturer shall furnish the letter authorized installers for working with company products.

B. Container Labels

Include manufacturer's name, trade name of product, kind of material, federal specification number (if applicable), expiration date (if applicable), and packaging date or batch number.



1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle joint sealer materials as recommended by the Manufacturer, to protect from damage.

1.06 PROJECT CONDITIONS

A. Environmental Requirements

1. Temperature: Unless otherwise approved or recommended in writing by the sealant manufacturer, do not install sealants at temperatures below 40 degrees F or above 85 degrees F.
2. Humidity and Moisture: Do not install the Work of this Section under conditions that are detrimental to the application, curing, and performance of the materials.
3. Ventilation: Provide sufficient ventilation wherever sealants, primers, and other similar materials are installed in enclosed spaces. Follow manufacturer's recommendations.
4. Do not proceed with installation of joint sealants under the following conditions
 - a. When joint substrates are wet.
 - b. Where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.
 - c. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
 - d. Contaminants capable of interfering with adhesion have not yet been removed from joint substrates.
 - e. Surfaces are frozen.
 - f. Surfaces are superheated by the sun.

B. Protection

1. Protect all surfaces adjacent to sealants with non-staining removable tape or other approved covering to prevent soiling or staining.



2. Protect all other surfaces in the Work area with tarps, plastic sheets, or other approved covering to prevent defacement from droppings.
3. Protect any painted surfaces which are not included in the Work from impact or damage.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. General Electric Co., Waterford, NY 12188
- B. Dow Corning Corp., Midland, Michigan 48686
- C. Pecora Corp., Harleyville, PA
- D. ChemRex Inc. - Sonneborn, Shakopee, MN 55379
- E. Tremco Sealing and Coatings, Wading River, NY 11792
- F. Bostik, Midland, MA 01949
- G. Protective Treatments, Inc. (PTI), Dayton, OH 45413
- H. Products Research & Chemical Corp., Gloucester City, NJ 08030
- I. Sika Corporation, Lyndhurst, NJ 07071
- J. Mameco International, Inc./RPM, Cleveland, Ohio 44128,
- K. or approved equal.

2.02 SEALANTS

- A. Type 1 Sealant (for use around windows, louvers, and other junctures).
 1. One-part low-medium modulus silicone sealant (plus or minus 50% movement); ASTM C920 classifications type S, grade NS, class 25, uses NT, M, G, and A: General Electric Silpruf, Dow Corning's 791, Pecora's 864, Sonneborn's Omniseal, Tremco Spectrem 2 or Sika SikaSil C-955.
 2. Silicones shall meet the following requirements:



- a. ASTM C719 - Low-Medium Modulus (+ or - 50%). Sealants shall not exhibit any cracking or surface degradation after 5000 hours exposure in the Atlas Twin Arc Weatherometer.
 - b. ASTM C661 - Shall not incur a durometer increase greater than 10 points.
 - c. Sealants shall contain zero parts of toxic isocyanurate ingredients.
3. Provide custom colors for use around window perimeters, to match window frame or masonry, or other colors as determined by the Commissioner.
 4. Thoroughly clean surfaces on which sealant is to be applied and prime surfaces as recommended by Manufacturer before applying sealant.
- B. Type 1C Sealant - For use around cast stone copings and other junctures.
1. One-part silicone sealant; ASTM C920 classifications type S, grade NS, class 25, uses NT, M, G, A and O: Pecora 890; Tremco Spectrum-1 or Sika's SikaSil C-995.
 2. Provide custom colors for use around window perimeters, to match window frame or masonry, or other colors as determined by the Commissioner.

2.03 JOINT FILLERS

- A. Expanded Polyethylene Joint Filler (for existing joints) Flexible, compressible, closed-cell polyethylene of not less than 10 psi compression deflection (25 percent).
- B. ASTM D1056, Class RE41 (for masonry joints) where shown on the Drawings.

2.04 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
 1. For primers used on site and within the weatherproof/waterproof membrane of the building comply with Volatile Organic Compounds (V. O. C.)



requirements specified in Section 016000.

- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.
 - 1. For cleaners used on site and within the weatherproof/waterproof membrane of the building comply with V.O.C. requirements.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.
- D. Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
 - 1. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), or (open-cell material), or B (bicellular material with a surface skin), as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- E. Bond Breaker Tape

Polyethylene or other plastic tape as recommended by the sealant manufacturer; non-bonding to sealant; self-adhesive where applicable.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine all joint surfaces for conditions that may be detrimental to the performance of the completed Work. Do not proceed until satisfactory corrections have been made.



3.02 PREPARATION

- A. Clean joint surfaces immediately before installation of sealant and other materials specified in this Section.
 - 1. Remove all loose materials, dirt, dust, rust, oils and other foreign matter that will impair the performance of materials installed under this Section.
 - 2. Remove lacquers, protective coatings and similar materials from joint faces with manufacturer's recommended solvents.
 - 3. Use methods such as grinding, acid etching or other approved and manufacturer's recommended means, if required, to clean the joint surfaces, assuring that the sealant materials will obtain positive and permanent adhesion.

3.03 JOINT BACKING INSTALLATION

- A. Install bond breaker tape in relaxed condition as it comes off the roll. Do not stretch the tape. Lap individual lengths.
- B. Install backer rod of sufficient size to fill the joint width at all points in a compressed state. Compress backer rod at the widest part of the joint by a minimum of 25 percent. Do not cut or puncture the surface skin of the rod.

3.04 SEALANT INSTALLATION

- A. Except as shown or specified otherwise, install sealants in accordance with the manufacturer's printed instructions.
- B. Install sealants with ratchet hand gun or other approved mechanical gun. Where gun application is impracticable, install sealant by knife or by pouring, as applicable.
- C. Finishing

Tool all vertical, non-sag sealants so as to compress the sealant, eliminating all air voids and providing a neat smoothly finished joint. Provide slightly concave joint surface, unless otherwise indicated or recommended by the manufacturer.



1. Use tool wetting agents as recommended by the sealant manufacturer.

3.05 FIELD QUALITY CONTROL

A. Field Adhesion Testing of Sealants - Test completed elastomeric joints as follows:

1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for the first 1000 feet of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 1000 feet of joint length thereafter or one test per each floor per elevation.
2. Test Method - Test joints by hand pull method described below:
 - a. Make knife cuts from one side of the joint to the other, followed by two cuts approximately 2 inches long at sides of joint and meeting cross cut at one end. Place a mark 1 inch from cross-cut end of 2 inch piece.
 - b. Use fingers to grasp 2 inch piece of sealant between cross-cut end and 1" mark, pull firmly at a 90 degree angle or more in direction of side cuts while holding a ruler along sides of sealant. Pull sealant out of joint to the distance recommended by the sealant manufacturer for testing adhesive capability, but not less than that equaling specified maximum movement capability in extension, hold this position for 10 seconds.
 - c. For joints with dissimilar substrates, check adhesion to each substrate separately. Do this by extending cut along one side, checking adhesion to opposite side.
3. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field-adhesion-test log.
4. Inspect tested joints and report on the following:



- a. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 - b. Whether sealants filled joint cavities and are free of voids.
 - c. Whether sealant dimensions and configurations comply with specified requirements.
5. Record test results in a field-adhesion-test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
 6. Repair sealants pulled from test area by applying new sealants following same procedures used originally to seal joints. Ensure that original sealant surfaces are clean and that new sealant contacts original sealant.
 7. Evaluation of Field Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.06 CLEANING

- A. Immediately remove misapplied sealant and droppings from metal surfaces with solvents and wiping cloths. On other materials, remove misapplied sealant and droppings by methods and materials recommended in writing by the manufacturer of the sealant material.
- B. After sealants are applied and before skin begins to form on sealant, remove all masking and other protection and clean up remaining defacement caused by the Work.



END OF SECTION 079200



SECTION 08 91 00
STATIONARY METAL WALL LOUVERS

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 RELATED WORK SPECIFIED ELSEWHERE

- A. Dampers: Section 23 33 13.
- B. Metal Ductwork: Section 23 31 13.
- C. Joint Protection: Section 07 92 00.

1.02 SUBMITTALS

- A. Shop Drawings: Show fabrication details and connections to adjacent Work.
- B. Product Data: Catalog cuts, specifications, and installation instructions for louver type specified.

1.03 QUALITY ASSURANCE

- A. Louvers shall be rated by AMCA (Air Movement and Control Assoc.).

PART 2 PRODUCTS

2.01 ALUMINUM LOUVERS

- A. Type: Stationary drainable blade extruded louvers, 6 inches deep, of aluminum alloy required for the indicated finish.
 - 1. Drainable blades formed with a drain gutter in each blade, positioned at approximately 37 degree angle and spaced approximately 4-1/2 inch centers.
 - 2. Frames formed with downspouts in each jamb and mullion.



3. Maximum air velocity below point of zero water penetration velocity.
 4. Maximum pressure drops:
 - a. 0.13 inch w.c. exhaust louvers.
 - b. 0.09 inch w.c. intake louvers.
- B. Fabrication: Form frames with mitered or coped members, welded or riveted and soldered joints. Form ends of blades flat against frame jamb and weld, or rivet and solder blades to frame at each end to ensure watertight joints. Reinforce units with concealed plates, angles, tees or other shapes to form a rigid unit. Fabricate louvers with horizontal and vertical mullions where louver openings exceed 60 inches in any direction. Allow for expansion and contraction.
- C. Finishes: Comply with the Metal Finishes Manual of the National Assoc. of Architectural Metal Manufacturers except as otherwise indicated.
1. Mill finish.
 2. Shop primed, minimum 1 mil thickness.
 3. 70 percent PVDF Resin, Liquid Paint Coating, Factory Applied, Oven Baked finish, color as selected by Commissioner.
 4. Baked enamel, minimum 1 mil thickness, color as selected by Commissioner.
 5. Clear anodized (AA-C22A41).
 6. Color anodized (AA-C22A42), color as selected by Commissioner.
 7. Protect exposed factory finished surfaces prior to shipping.
- D. Sills: Same material and finish as the louvers.

2.02 STEEL LOUVERS

- A. Type: Stationary formed galvanized sheet metal louvers, formed of not less than 20 gage steel.
- B. Fabrication: Form frame with mitered or coped galvanized steel members and with continuously welded or riveted and soldered joints. Set blades at 45 degrees unless otherwise indicated. Form ends of blades flat against frame jamb and weld or rivet and solder joints to ensure that joints will be watertight. Reinforce units with concealed plates, angles, tees or other shapes to form a rigid unit.



- C. Finishes:
1. Factory primed, minimum 1 mil thickness.
 2. 70 percent PVDF Resin, Liquid Paint Coating, Factory Applied, Oven Baked finish, color as selected by Commissioner.
 3. Baked enamel, minimum 1 mil thickness, color as selected by Commissioner.
- D. Sills: Same material and finish as the louvers.

2.03 LOUVER SCREENS

- A. Fabricate removable screen frames of the same metal and finish as the louvers. Locate screens on the inside face of the louvers, unless otherwise indicated. Secure screens to louver frames with machine screws at each corner and spaced 12 inches oc.
- B. Bird Screens:
1. Galvanized 0.625 steel wire, 1/2 inch mesh.
 2. Anodized 0.064 aluminum wire, 1/2 inch mesh.
- C. Insect Screens:
1. Anodized aluminum wire, 18 x 14 mesh.
 2. Copper or bronze wire, 18 x 14 mesh.

2.04 BLOCK AND BRICK VENTS

- A. Block/Brick Vents: Extruded or cast aluminum masonry size units, minimum 0.125 inch thick with 1/4 inch structural ribs. Provide aluminum insect screening secured to the interior face of the vent.

2.05 FASTENERS AND ANCHORS

- A. Bolts, Nuts, Lags, Washers, Screws and Anchors: Same material as items being installed unless otherwise indicated; types, gages and lengths to suit unit installation conditions; galvanized steel, aluminum or stainless steel for exterior locations or for items anchored to exterior walls.

2.06 MISCELLANEOUS

- A. Bituminous Paint: SSPC-PAINT 12 (Cold applied asphalt mastic).



PART 3 EXECUTION

3.01 INSTALLATION

- A. Install the Work of this Section in accordance with the manufacturer's printed instructions, except as shown otherwise on the Drawings.
- B. Install units plumb, level and in proper alignment with adjacent construction.
- C. Form tight joints with exposed connections accurately fit together.
- D. Use concealed anchorages wherever possible. Provide brass or lead washers fitted to screws where required to protect metal surfaces and to form a weathertight connection.
- E. Where louvers are in contact with concrete, masonry or a dissimilar metal, coat the contacting surface with a heavy coat of bituminous paint.
- F. Clean louvers after installation. Remove dirt, dust, and grime.

END OF SECTION 089100



SECTION 092116
GYPSUM BOARD ASSEMBLIES

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide all materials, labor and equipment to properly install the following Work:
1. Gypsum board ceilings and soffits.
 2. Non-load-bearing steel framing.
 3. All accessory components.

1.02 REFERENCES

- A. References and industry standards listed in this Section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications, the recommendations, suggestions, and requirements described in the referenced standards shall be deemed mandatory and applicable to the Work.
- B. American Society for Testing and Materials (ASTM), latest editions.
- A641 Zinc-Coated (Galvanized) Carbon Steel Wire.
- A653/
A653M General Requirements for Steel Sheet, Zinc Coated (Galvanized) by the Hot-Dip Process
- C11 Standard Terminology Related to Gypsum and Related Building Materials and Systems
- C36 Gypsum Wallboard
- C442 Gypsum Backing Board
- C473 Standard Test Methods for Physical Testing of Gypsum Panel Products
- C475 Joint Treatment Materials for Gypsum Wallboard Construction



- C630 Water Resistant Gypsum Backing Boards
- C645 Non-Load (Axial) Bearing Steel Studs, Runners (Track), and Rigid Furring Channels for Screw Application of Gypsum Board
- C665 Mineral Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
- C754 Installation of Steel Framing Members to Receive Screw-Attached Gypsum Wallboard, Backing Board or Water Resistant Backing Board
- C834 Standard Specification for Latex Sealants
- C840 Specification for Application and Finishing of Gypsum Board
- C919 Practices for Use of Sealants in Acoustical Applications
- C1002 Steel Drill Screws for the Application of Gypsum Board
- C1047 Standard Specification for accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1278 Standard Specification for Fiber-Reinforced Gypsum Panel
- C1325 Standard Specification for Non-Asbestos Fiber Mat Reinforced Cement Interior Substrate Sheets
- C1388 Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings
- C1396 Standard Specification for Gypsum Board
- D2020 Standard Test Methods for Mildew (Fungus) Resistance of Paper and Paperboard
- D3273 Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber
- E84 Surface Burning Characteristics of Building Materials
- E119 Fire Tests of Building Construction and Materials
- G21 Standard Practice for determining Resistance of Synthetic Polymeric Materials to Fungi



C. Gypsum Association

GA-600 Fire Resistance Design Manual

GA-214 Levels of Finishes

GA-216 Recommended Specifications for the Application
and Finishing of Gypsum Board

GA-505 Gypsum Board Products - Glossary of Terminology

D. Underwriters Laboratories Inc. (UL)

Fire Resistance Directory

E. Tile Council of America

Handbook for Ceramic Tile Installation

1.03 SUBMITTALS

A. Product Data

Submit manufacturers' specifications and installation instructions for the following products: joint compounds, fasteners, trim, metal studs, runners, resilient clips, and all related accessories.

B. Shop Drawings

Submit drawings indicating sizes and locations of steel grounds for attachment and support of signs, other accessories, fixtures, furnishings, finishes, and equipment.

C. Samples

Submit samples of the following materials:

1. Wallboard: 12" square.

2. Accessories: 12", outside corner bead.

D. Materials Certificates

1. Submit certificates from the manufacturers of the specified materials stating compliance with the applicable requirements set forth for all materials specified in this Section.

2. Submit certification and listing by an Approved



Agency in accordance with NYC Dept. of Buildings rules, indicating that the materials and assemblies as regulated by the NYC Building Code are acceptable for the intended use. When test methods are stipulated in the NYC Building Code, the tests utilized shall be stated in the certification. Prior MEA and BSA approvals are acceptable for materials conforming to current Code requirements.

E. Low Emitting Materials Compliance Submittals.

1.04 QUALITY ASSURANCE

A. Qualifications

Submit affidavit certifying that installer is a firm with not less than 3 years of experience relevant to the installation of specified materials.

B. Regulatory Requirements

1. Building Code: Work of this section shall conform to all requirements of N.Y.C. Building Code.
2. New York City Board of Standards and Appeals (BSA), and New York City Materials Equipment Acceptance (MEA) approvals are acceptable for materials and assemblies conforming to current NYC Building Code requirements.

1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in original packages, containers or bundles bearing brand name and identification of manufacturer.
- B. Store all materials inside, under cover, in a manner to keep them dry, protected from weather, direct sunlight, surface contamination, corrosion and damage from construction traffic and other causes. Neatly stack gypsum boards to prevent sagging. Do not store at temperature exceeding 125°F.
- C. Handle gypsum boards to prevent damage to edges, ends or surfaces. Protect metal framing members, corner beads, and trim from being bent or damaged.

PART 2 - PRODUCTS

2.01 MANUFACTURERS



A. Gypsum board and related products

Gypsum board shall be mold and moisture resistant.

1. SHEETROCK brand Mold Tough Gypsum Panels, USG Corporation
2. SHEETROCK brand Mold Tough Gypsum Liner Panels, USG Corporation
3. DensArmor Plus Interior Guard Panels, Georgia-Pacific Gypsum Corporation, Atlanta, GA
4. DensGlass Ultra Shaft Liner Panels, Georgia-Pacific Gypsum Corporation, Atlanta, GA
5. Gold Bond brand XP Fire-Shield Wallboard, National Gypsum Company, Charlotte, NC
6. Gold Bond brand 1" Fire-Shield Shaftliner XP Gypsum Panels, National Gypsum Company, Charlotte, NC
7. Or approved equal.

B. Metal Support Materials

1. Marino\Ware, South Plainfield, NJ.
2. Dietrich Industries Inc., Pittsburgh, PA.
3. Super Stud Building Products Inc., Astoria, NY.
4. United States Gypsum Co., Chicago, IL.
5. Or approved equal.

2.02 MATERIALS

A. Metal Framing

1. Steel Studs

In compliance with ASTM C645, provide galvanized steel, C-shaped members as specified and as shown on the Drawings of sizes indicated below:

- a. Stud depth: 2 1/2" unless indicated otherwise on the Drawings.
- b. Stud thickness: 0.0454 inch min. thickness of base metal or 18 gage min., unless otherwise indicated.



2. Runners

In compliance with ASTM C645, provide galvanized steel runners to match applicable assembly specified, to match wall framing members, typically 0.0296 inch minimum thickness of base metal or 20 gage min., unless indicated otherwise.

3. Fasteners for Metal Framing

Provide fasteners of type, size, style, grade, holding power, class, and other properties required for secure installation of framing. Galvanize all fasteners and accessories.

B. Gypsum Board

1. General: Panels shall be mold and moisture resistant, meeting a minimum average panel score of "8" in accordance with ASTM D3273. Provide in dimensions resulting in the minimum number of joints. Long edges tapered. Panels shall not contain asbestos.
2. Paper faced gypsum board
 - a. Gypsum wallboard: 5/8" thick, Firecode Core (Type X). Comply with ASTM C36 or C630, and ASTM C1396.
 - b. Gypsum board shall be manufactured with a minimum of 5% of post consumer and a minimum of 90% pre-consumer content materials.

C. Furring Anchorages

In compliance with ASTM A641, provide 16 gage galvanized wire ties, manufacturers standard wire-type clips, bolts, or screws as recommended by furring manufacturer.

D. Trim Accessories

1. General: Comply with ASTM C1047, standard accessories as recommended by gypsum board



manufacturer. Where exposed to view provide accessories recommended for level-5 finish. Metal trim shall be formed of galvanized or zinc-coated steel. Provide paper faced metal trim where recommended by board manufacturer. Provide corner beads, L-type edge trim beads, and control joint beads.

2. Corner Reinforcement, provide for all outside corners:
 - a. Paper faced metal outside corner, tape-on bead.

E. Joint Treatment Materials

1. Jointing System - typical: Comply with ASTM C475. Type recommended by the manufacturer for the application indicated and to meet fire resistance requirements where applicable. Reinforcing tape and compound shall be designed as a system to be used together.
2. For use with mold and moisture resistant paper-faced and glass mat-faced gypsum board panels provide setting type joint compound as recommended by the board manufacturer for joints, fastener heads and cut edges of board.
3. Skim coat: For final coat of Level 5 finish, use type recommended by manufacturer.
4. Jointing compound shall be asbestos free.

F. Miscellaneous Materials

1. General: Provide auxiliary materials for gypsum board work of the type and grade recommended by the gypsum board manufacturer.
2. Gypsum board Screws:
 - a. Comply with manufacturer's recommendations and ASTM C1002.
 - b. For fastening the gypsum board in place, specially designed for use with power-driven tools, of length recommended for application in board manufacturers printed instructions, but not less than 1-1/4" long, with self-tapping threads and self-drilling points.



Screws shall be steel with rust inhibitive coating.

3. Flexible Closures: For non-fire-rated Work, for filling gaps between steel deck flutes and tops of partitions. Closures shall be fabricated to conform to profile of deck. Closed cell EPDM rubber, with adhesive. Houston Foam Plastics, Houston, TX, 800-231-1752, Hilti Inc. ,Plano , Texas; 3M Products, St.Paul, MN, or approved equal.

PART 3 - EXECUTION

3.01 EXAMINATION AND PREPARATION

A. Inspection

1. Prior to installation of the Work of this Section, carefully inspect the installed Work of all other trades and verify that all such Work is complete to the point where this installation may properly commence.
2. Do not install gypsum board in any location where it may be directly exposed to water.
3. Installation shall comply with manufacturer's recommendations as approved by the Commissioner, with all pertinent codes and regulations as a minimum standard.

B. Coordination of Work

Coordinate Work of this Section with the Work of other Divisions which have items installed in, on or contiguous to gypsum board assemblies.

C. Construction Tolerances.

1. Do not exceed 1/8" in 8 feet variation from plumb or level in any exposed line or surface except at joints between boards. Do not exceed 1/16" variation between planes or abutting edges or ends. Shim as required to comply with specified tolerances.
2. For soffits and ceilings verify that direct suspension system has been installed properly, that main runners are spaced evenly and have been leveled to a tolerance of 1/8" in 12 feet measured



both lengthwise on each runner and transversely between parallel runners so that furring member installation may proceed accurately.

3.02 ENVIRONMENTAL REQUIREMENTS

A. General

Comply with requirements of all referenced application standards and manufacturers recommendations for environmental conditions before, during and after gypsum board application.

B. Environmental Conditions

1. Maintain continuous uniform building temperatures of not less than 55°F and not more than 90°F for a minimum of 48 hours prior to, during and following application of gypsum board and joint treatment materials and until joint and finishing compounds have dried.

Conform to more restrictive environmental conditions where required by the manufacturer.

2. Do not install gypsum board in any location where it may be exposed to moisture during the Construction Phase of the Project. Sources of moisture may include: rain, snow, groundwater, flooding and contiguous construction materials. Replace any gypsum board that has been exposed to moisture during the Construction Phase.

C. Ventilation

Ventilate building spaces as required to remove water in excess of that required for drying of joint treatment material immediately after its application. Avoid drafts during dry hot weather to prevent too rapid drying.

D. Drying Time

Provide adequate drying time between coats of joint compound.

3.03 INSTALLATION - STEEL FRAMING

A. General



Comply with ASTM C754 and manufacturers installation instructions for all non-load bearing steel stud installations.

B. Steel Stud Installation

1. Where partitions abut ceiling or deck construction or vertical structural elements, provide slip or cushion type joint between metal framing and structure as recommended by manufacturer to prevent transfer of structural loads or movements to partitions, except as otherwise indicated.
2. Secure runner tracks as recommended by the framing manufacturer for the upper and lower construction involved, except, do not exceed 24" on center spacing for power driven fasteners. Provide fasteners approximately 2" from corners and ends of tracks.
3. Position studs vertically. Install studs at 16" on center maximum spacing unless closer spacing is indicated on the Drawings. Fasten studs to track flanges with screws.

C. Running Channel Installation

Running channels or stud tracks shall be galvanized cold rolled steel with 1½" extended leg on top runner to allow movement. Match gauge of studs indicated for assembly. Securely fasten to slab or vertical structural elements with fasteners approved by manufacturer, spaced not more than 24" on center. Provide slip or cushion type joint between channel and structural elements as indicated in paragraph titled Steel Stud Installation, above.

3.04 INSTALLATION - PANELS

A. Applying and Finishing Panels, General

Comply with manufacturer's printed installation instructions and recommendations based upon Project conditions, and ASTM C840 and GA-216, for all gypsum board application and finishing.

1. Provide wallboard panels of type, thicknesses, and number of layers indicated on the Drawings.



2. Attach gypsum board to supplementary framing and blocking provided for additional support at openings and cutouts.
3. Work shall be sealed at perimeters, and at all penetrations with continuous beads of acoustical sealant, including a bead at both faces of partitions. Comply with ASTM C 919 and all manufacturers recommendations for beads. Close off sound-flanking paths around or through the Work.
4. For non-fire-rated work provide flexible EPDM rubber closures, securely held in place, to completely close all voids between metal deck and tops of partitions and other Work.
5. Install the gypsum board with separate boards in moderate contact but not forced into place. At internal and external corners, conceal the cut edges of the board by overlapping covered edges of the abutting boards. Stagger the boards so that corners of any four boards will not meet at a common point except in vertical corners.
6. Extend all partitions to underside of roof and floor construction, unless indicated otherwise.
7. Fit gypsum panels around ducts, pipes, and conduits.
8. Where partitions intersect any structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow space to properly install sealant or firestopping as applicable.
9. Isolate perimeter of non-load-bearing gypsum board partitions at structural abutments. Provide space to properly install sealant or firestopping as applicable between edges and abutting structural surfaces.
10. Fasten the gypsum board with drywall screws as recommended by the gypsum board manufacturer. Drive the required screws with clutch-controlled power screwdrivers. Provide fasteners in gypsum panels according to referenced gypsum board application and finishing standard, manufacturer's written recommendations, and as required for fire-resistance-rated assembly. Maximum spacing shall be as follows:
 - a. Maximum fastener spacing 8 inches o.c.



B. Panel Application

1. Single layer application on walls/partitions: install the gypsum board to studs at right angles to the framing members.
2. Make end and edge joints, where required, over framing members. Position boards so that like edges abut, with tapered edges against tapered edges and mill-cut or field-cut ends against mill-cut or field-cut ends. Do not place tapered edges against cut edges or ends.

C. Finishing and Joint Treatment

1. General: Treat gypsum board joints, interior angles, edge trim, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
2. Prefill open joints and damaged surface areas.
3. Apply joint tape over gypsum board joints, except those with trim having flanges not intended for tape.
4. Gypsum Board Finish Levels: Finish panels to levels indicated below, according to ASTM C840, for locations indicated:
 - a. ASTM C840 - Level 5: Embed tape and apply separate first, fill, and finish coats of joint compound to tape, fasteners, and trim flanges, and apply skim coat of joint compound over entire surface at panel surfaces that will be exposed to view.
5. Outside Corners
 - a. Install corner bead fitting neatly over the corner and apply compound to both sides of corner.
 - b. Treat the corner with joint compound as recommended by accessory manufacturer, allowing compound to dry between coats.
6. Inside Corners



Treat as specified for joints, except that the reinforcing tape shall be folded lengthwise through the middle and fitted neatly into corner.

7. Properly prepare surfaces to receive painting, coating and tile finishes.

3.05 CLEAN UP AND PROTECTION

- A. In addition to the requirements of these Specifications, use all necessary care during execution of this portion of the Work to prevent scattering of gypsum board scraps and dust and to prevent tracking of joint and finishing compound onto floor surfaces. At completion of each segment of installation in a room or space, promptly pick up and remove from the working area all scraps, debris and surplus material of this Section.

END OF SECTION 092116



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 099123
PATCHING AND PAINTING

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. This Section includes surface preparation and field painting of the following:
1. Exposed interior items and surfaces.
 2. Surface preparation, priming and finish coats specified in this Section are in addition to shop priming and surface treatment specified in other Sections.
- B. Paint exposed surfaces, except where the paint schedules indicate that a surface or material is not to be painted or is to remain natural. If the paint schedules do not specifically mention an item or a surface, paint the item or surface as directed by the Commissioner. If the schedules do not indicate color or finish, the Commissioner will select from standard colors and finishes available.
1. Painting includes field painting of exposed bare and covered pipes and ducts (including color coding), hangers, exposed steel and iron work, and primed metal surfaces of mechanical and electrical equipment.
- C. Do not paint prefinished items, concealed surfaces, finished metal surfaces, operating parts, and labels as described in Article 2.05A.

1.02 REFERENCES

- A. References and industry standards listed in this Section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications, or mandated by governing codes or regulations, the recommendations, suggestions, and requirements described in the



referenced standards shall be deemed mandatory and applicable to the Work.

1. American Society of Testing and Materials (ASTM)
2. N.Y.S. Department of Environmental Conservation
3. U.S. Department of Labor
4. Occupational Safety and Health Administration (OSHA)
5. Steel Structures Painting Council (SSPC)

1.03 DEFINITIONS

- A. The term "Painting" as used in this Section, means the application of all coatings such as paint, primer, enamel, varnish, shellac, oil, etc. as listed in the Painting Schedules.
- B. The term "Painting" also includes preparation of surfaces for such applications, and the clean-up as hereinafter specified.
- C. The term "Walls" means all surfaces from floor, or top of base, or top of wainscot, to ceiling or hung ceiling.
1. Include pilasters, breaks, jambs, reveals, returns, arches.
 2. Include hardboards, pegboards.
 3. Include free standing columns, low partitions.
 4. Include masonry, plaster or gypsum board interiors of wardrobes or closets, cupboards and other enclosed spaces.
- D. The term "Ceilings" means the general overhead horizontal surfaces.
1. Include cornices, arches, soffits, stair soffits.
 2. Include beam and girder haunches.
 3. Include primed metal cover and border strips.
 4. Include metal frame of ceiling lights and ceiling equipment.



5. Include side faces of hung or furred ceiling.
- E. Touching-up bare spots specified for previously primed or painted surfaces is in addition to the coats specified for the paint system.
- F. Finishes:
1. Flat refers to a lusterless or matte finish with a gloss range below 15 when measured at an 85-degree meter.
 2. Satin refers to low-sheen finish with a gloss range between 15 and 35 when measured at a 60-degree meter.
 3. Semigloss refers to medium-sheen finish with a gloss range between 30 and 65 when measured at a 60-degree meter.
 4. Full gloss refers to high-sheen finish with a gloss range more than 65 when measured at a 60-degree meter.
- G. Concealed: The term "concealed" refers to surfaces, piping, ducts or conduit which cannot be accessed without moving a building element such as within a chase, wall or ceiling.
1. Concealed surfaces include walls or ceilings in the following generally inaccessible spaces:
 - a. Furred areas.
 - b. Ceiling plenums.
 - c. Duct shafts.
 - d. Elevator shafts.
- H. Exposed: The term "exposed" refers to any item which is not concealed.
1. The term "exposed to public view" means situated so that it can be seen from eye level from a public location. A public location is that which is accessible to persons not responsible for operation or maintenance of the building.



1.04 SUBMITTALS

A. Product Data

Provide manufacturers' product literature for all materials specified and material manufacturer's printed directions and recommendations for environmental conditions, surface preparation, priming, mixing, reduction, spreading rate, application, storage and VOC content, as applicable for each of the materials specified.

B. Samples

1. Verification prior to installation

- a. Contractor shall furnish color chips for surfaces to be painted.
- b. Submit two samples of each color and finish selected on 12" x 12" hardboard.
- c. Two samples of finish on metal surfaces.

2. All samples shall be labeled; and include the following information:

- a. Manufacturer's name
- b. Type of paint
- c. Manufacturer's stock number
- d. Color: name and number
- e. Federal Specification number, as specified
- f. Federal regulations for amount of lead in paint.
- g. VOC content

C. Quality Assurance

1. Certification that materials for each system are obtained from a single manufacturer.
2. Certification that material meets or exceeds the performance requirements of Federal Specifications.



3. Certification that materials comply with N.Y.C. and N.Y.S. regulations for Volatile Organic Compounds.
4. Certification that interior paint systems conform to ASTM D3273-00(2005), Standard Test Method for Resistance to Growth of mold on the Surface of Interior Coatings in an Environmental Chamber.

D. Testing

Toxicity Characteristic Leaching Procedure (TCLP) testing per Article 3.04.

E. Guarantee

Provide Guarantee per Article 1.08.

F. Low Emitting Materials Compliance Submittals:

1. Provide documentation for each coating to be used on the building interior indicating that the coatings comply with low V.O.C. requirements.

1.05 QUALITY ASSURANCE

A. General

1. All painting materials shall arrive at the job ready-mixed.
2. Remove all rejected materials from the premises immediately.
3. All thinning and tinting materials shall be as recommended by the manufacturer. Generally, all paints shall not require additional thinning.
4. Materials selected for each system type shall be products of a single manufacturer.

B. Source Limitations: Obtain block fillers, primers, and undercoat materials for each coating system from the same manufacturer as the finish coats.

C. Regulatory Requirements

1. N.Y.C. Building Code, latest edition



2. N.Y.S. Department of Environmental Conservation - Part 205 on "Architectural Surface Coatings" - for (VOC) Volatile Organic Compounds.
3. Steel Structures Painting Council (SSPC).
4. U.S. Department of Labor, Occupational Safety and Health Administration, Construction Industry Standards (29 CFR 1926/1910).
5. Occupational Safety and Health Administration (OSHA) 29 CFR 1926.62 (Lead In Construction Standard).
6. New York State Department of Environmental Conservation regulations, 6 NYCRR part 364.
7. New York City Department of Environmental Protection Waste water disposal permitting requirements.

D. Certifications

Federal Specifications: When materials are specified to comply with Federal Specifications, products will be accepted which meet or exceed the performance requirements of such Federal Specifications and comply with all regulations currently in effect.

1. Indicate that material complies with Federal Specifications by including the Federal Specifications number on the container label or on the product literature, or submit a statement with the Product Data stating that material meets or exceeds the performance requirements of the Federal Specifications.

E. Field Samples

1. Provide samples of each color and finish, under natural lighting conditions, in a location where each finish is to be applied.
2. Commissioner will request review of first completed item of each color scheme required for color, texture, and workmanship.
3. First acceptable item will be used as project standard for each color scheme, or finish.



4. Primer coat is to be inspected and approved in all locations before any subsequent finish coats are applied.
5. In existing building locations; repair of existing base surface is to be approved prior to commencement of painting.

1.06 DELIVERY, STORAGE, AND HANDLING

A. Delivery

Deliver materials to the site in original, unopened containers bearing manufacturers name and label containing the following information:

1. Product name or title of material
2. Manufacturer's stock number, batch number, VOC content in grams per liter and date of manufacture.
3. Manufacturer's name
4. Federal Specification number, if applicable.
5. Federal regulations for amount of lead in paint (less the 0.06% lead in non-volatile ingredients)
6. Contents by volume for major pigment and vehicle constitutions
7. Thinning instructions
8. Application instructions
9. Color name and number

B. Storage

1. Commissioner will designate space on premises for storage of materials. Contractor shall restrict storage in this area to paint materials and related equipment, and provide the following:
 - a. Provide one (1) approved chemical dry fire extinguisher equal to 20 lb. CO₂ rating in all assigned rooms or locations where painting materials are stored. Fire extinguisher shall bear the label of the National Board of



Fire Underwriters and tag of most recent inspection.

- b. Provide three (3) standard size red fire pails with clean sand in above locations. At the completion of project, fire extinguishers and pails shall become property of Contractor.
2. Maintain storage area in clean condition, store materials not in use in tightly covered containers. Remove oily rags, waste and empty containers from site each night.
3. Provide Commissioner with one key for each space if spaces are to be kept locked when not in use.
4. Protect all materials from freezing.

1.07 PROJECT CONDITIONS

A. Environmental Requirements

1. Comply with manufacturer's recommendations as to environmental conditions under which coatings and coating systems can be applied.
2. Do not apply finish in areas where dust is being generated or will be generated while the material is drying.
3. Provide paint and coating products to comply with applicable environmental regulations, VOC requirements and NYC Building Code.
4. In all areas being painted, the Contractor shall ensure that there is adequate ventilation to ensure proper paint drying, along with minimizing paint odors.
5. The Contractor shall ensure that all requirements of OSHA 29 CFR 1926.62 (Lead in Construction Standard) are adhered to during the project. In addition, the Contractor shall ensure that proper work area protection and clean-up procedures (as described in this Section) are strictly adhered to during all phases on the project.



1.08 GUARANTEES

- A. Adherence of workmanship and materials to Specifications requirements shall be maintained for the one year Contract guarantee period. These requirements shall include the following:
1. There shall be no evidence of blistering, peeling, crazing, alligatoring, streaking, staining, or chalking.
 2. Dirt shall be removed without blemishing the finish by washing with mild soap and water.
 3. Colors of surfaces shall remain free from serious fading; the variation, if any, shall be uniform.
- B. Correct all defects, appearing within the guarantee period, by removal of the defective work and replacement as directed.
- C. All corrective measures shall be the Contractor's responsibility, and shall be made at no extra cost to the City if New York. The requirements set forth in Part 3 of these Specifications shall be strictly adhered to.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Subject to compliance with specified requirements, provide "First Line" or "Top Quality" products of one of the following manufacturers:
1. Benjamin Moore and Co.
 2. Devoe and Reynolds Co.
 3. The Sherwin-Williams Co.
 4. Tnemec Company, Inc.
 5. Or approved equal.

2.02 MATERIALS



- A. Provide products which meet all N.Y.S. Part 205-VOC requirements for applications outlined herein and comply with low V.O.C. requirements.
- B. Provide products which meet all Federal regulations for amount of lead in paint (less than 0.06% lead in non-volatile ingredients).
- C. Provide best quality grade of various types of coatings as regularly manufactured by the paint materials manufacturers. Materials not displaying manufacturers' identification as a standard, best-grade product will not be acceptable.
- D. Use only thinners approved by paint manufacturers for applications intended and use only within recommended limits.
- E. Interior paint systems shall not support mold growth when tested in accordance with ASTM D3273.

2.03 REFERENCE STANDARDS

- A. Paint materials shall meet or exceed the requirements of the following standards:

Federal Specifications

1. Primers, Sealers, Undercoats
 - a. Metal Primer for Galvanized surfaces:
FS TT-P-001984
FS TT-P-650-C
 - b. Metal Primer Aluminum or Steel surfaces:
FS TT-P-57B
 - c. Primer Sealer, Latex Base: FS TT-P-650C
 - d. Alkyd Primer (Corrosion Inhibiting)
Lead and Chromate Free, FS TT-P664C
VOC Complying
 - e. Acrylic Primer TT-P-650-C
2. Finish Paints
 - a. Flat Vinyl Acrylic Latex
Interior: TT-P-29J



- b. Semi-Gloss Vinyl Acrylic Latex Enamel, Interior: TT-P-1511-B
- c. Alkyd Odorless Semi-Gloss Enamel: FS TT-E-509C for white and tints; Class A for deep colors. FS TT-E-529

3. Miscellaneous Materials:

- a. Mineral Spirits (Petroleum Paint Thinner): FS TT-T-291
- b. Color Pigments: Pure, non-fading, finely ground pigments, at least 99 percent passing a 325 mesh sieve. Color pigments that are to be used on plaster shall be lime proof - FS-TT-P-381.
- c. Shellac: Two pound cut shellac, FS TT-S-300
- d. Surface Sealer: Pigmented Oil for Plaster & Wallboard - FS-TT-S-179.

B. Miscellaneous Standards and Requirements

- 1. Cleaning Solvents: Low toxicity; flash point in excess of 100°F.
- 2. Spackling Compound: ASTM C475.

2.04 COLORS

A. Selection

- 1. Paint colors, surface treatments and finishes will be selected by the Commissioner.
- 2. Color Schedule will be issued to the Contractor after award of the Contract.
 - a. Final acceptance of colors will be from actual job applications.

2.05 PAINTING SCHEDULE

A. Surfaces not to be painted, unless specifically indicated otherwise:

- 1. Polished or bright metals: Aluminum, bronze, brass, chrome, nickel, stainless steel, copper.



2. Exterior: Brick, Stone, Masonry, Concrete
3. Glass
4. Galvanized members not exposed to public view
5. Ceramic Materials
6. Factory Pre-Finished Masonry Block.
7. Resilient Flooring Materials; Wood Floors.
8. Terrazzo; Marble; Bluestone
9. Acoustical Tile
10. Chalk Boards; Cork Boards; Bulletin Boards; Plastic Laminate
11. Mechanical Equipment, Steel Shelving, and Cabinets, which are factory finished.
12. General Construction Items with factory applied final finish.
13. Factory finished Wood Doors.
14. Acoustic Tile & Metal Pan Ceiling
15. Pipe and duct Spaces and utility tunnels, including items within the space such as pipes, ducts and conduits.
16. Meter Room including items within the space such as pipes, ducts and conduits.
17. Concealed Ducts, Pipes, and Conduit.
18. Metal Lockers
19. Toilet Compartments
20. Light Fixtures
21. Electrical Distribution Cabinets
22. Foundation Spaces
23. Furred Areas
24. Ceiling Plenums



25. Valve and Damper Operators
26. Mechanical Linkages
27. Sensing Devices
28. Motor and Fan Shafts
29. Light Switch and Electrical Outlet Covers
30. Labels: Do not paint over Underwriters Laboratories (UL), Factory Mutual (FM), or other code-required labels or equipment name, identification, performance rating, or nomenclature plates.

B. Interior Finish Schedule - Standard

1. All new and previously unpainted, surfaces shall receive one (1) prime coat and two (2) finish coats unless otherwise specified.
2. All previously painted surfaces shall be spot primed as needed and receive (2) finish coats unless otherwise specified.
3. First or Prime coats shall vary with substrates and are outlined in Article 2.06 - Interior Paint Systems.

2.06 INTERIOR PAINT SYSTEMS

A. Gypsum Drywall and Plaster:

1. Flat Finish:

1st Coat - Vinyl Acrylic Latex
Primer Sealer (Flat) -- 1.0 Mils DFT

2nd & 3rd Coats -
Flat Vinyl Acrylic Latex -- 1.3 Mils DFT
each coat

2. Semi-Gloss Finish:

1st Coat - Vinyl Acrylic Latex
Primer Sealer -- 1.0 Mils DFT

2nd & 3rd Coats -
Semi-Gloss Vinyl Acrylic Latex



Enamel -- 1.3 Mils DFT
each coat

3. For use over existing oil based paints

100% Acrylic Primer - - 1.0 mils DFT
Tinted as required to approximate
Finish color

2nd & 3rd Coats -
Semi-Gloss Vinyl Acrylic Latex
Enamel -- 1.3 Mils DFT
each coat

B. Ferrous Metal:

1. Flat Finish: Metal ceilings, jamb and head
sections, coat and hat rack, metal shelves.

*1st Coat - Alkyd Modified Acrylic Rust Preventive
Latex Primer -- 1.6 Mils DFT

2nd & 3rd Coats
Flat Vinyl Acrylic Latex -- 1.3 Mils DFT
each coat

2. Semi-Gloss Finish: Convector enclosures, grilles,
access doors, frames, Steel Doors and Frames,
Trim, Partitions, Screens, Demountable Office
Partitions, Office Railings, Wire mesh work.

*1st Coat - Alkyd Modified Acrylic Rust Preventive
Latex Primer -- 1.6 Mils DFT

2nd & 3rd Coats -
Semi-Gloss Vinyl Acrylic Latex
Enamel -- 1.3 Mils DFT
each coat

* Provide full prime coat on new and previously unpainted
surfaces. Spot prime previously painted surfaces,
including shop-primed items, as needed. Items shop
primed with modified alkyd equal to Tnemec 10-99 primer
shall be touched up with same primer. See related
specification sections.

PART 3 - EXECUTION

3.01 EXAMINATION

A. Verification of Conditions



1. The application of painter's finish to any surface shall be taken to indicate that the Contractor considers such surfaces suitable for a first-class finish.
2. Do not apply painter's finish in any locations until the Work of other Contractors that might damage the new finish is completed.
3. Notify the Commissioner in writing regarding Work by others that does not provide a suitable surface for the new finish.
4. In case of dispute regarding the suitability of any surface, the Commissioner's decision shall be final and conclusive upon all concerned.
5. Contractor shall check the compatibility of previously painted surface with the new coating by applying a test panel 4 foot wide x wall height. Allow test panel to dry thoroughly; verify proper adhesion before proceeding with painting Work.

3.02 PREPARATION AND APPLICATION

A. Protection

1. In cases where the painting of surfaces involves removal or disturbance of existing paint and the paint is known or assumed to be lead-based paint, the following protection requirements shall apply:
 - a. All objects near or adjacent to the surface(s) to be painted shall be moved a minimum of three feet away from that surface(s). Any immovable object, and the floor, within the three foot "work area" shall be covered with one layer of 6-mil polyethylene, sealed on all edges to prevent the penetration of dust and debris. If the ceiling is to be painted, all objects in the room and the floor of the room shall be covered in this manner.
 - b. All objects bordering the three-foot work area shall be completely covered with clean cloths, heavy building paper or clean plastic covering.



- c. If, during the removal of existing paint, the Contractor notices paint chips or other debris related to the ongoing work on objects beyond the border of the three foot work area, these objects shall be cleaned by HEPA vacuuming and wet-wiping and then covered as described in (b) above.
 - d. The protection shall remain in place during all paint removal activities.
 - e. All protection is to be carefully removed, cleaned or discarded after painting is complete.
2. In cases where the painting of surfaces does not involve the removal or disturbance of existing paint or the paint is not lead-based as determined by testing by the Commissioner, the following protection requirements shall apply:
 - a. In each area to be painted, cover and protect furniture, equipment and floors from damage with clean cloths, heavy building paper or clean plastic covering secured in place. All protection is to be carefully removed, cleaned or discarded after painting is complete.

B. Removal of Existing Work

1. Remove wire guards, screens, grilles and similar items as necessary to paint properly all surfaces, behind these items.
 - a. These items shall be HEPA vacuumed and wet-cleaned once removed. Once cleaned, the items shall be placed on 6-mil polyethylene sheeting (or equivalent) and covered with a second layer of 6-mil polyethylene sheeting.
 - b. If paint is to be removed from these items, the contractor shall ensure that the items are taken to a separate, non-occupied space prior to scraping and repainting.
2. Remove and paint behind pictures, signs, shades, drapes, furniture, cabinets, lockers and similar items that are not secured to walls.



3. Unless otherwise specified, radiators, convectors, univents need not be removed providing all visible surfaces of these items and visible surfaces behind them are properly painted.
4. Carefully mark removed work for identification and replace in the original location unless otherwise directed.

C. Surface Preparation

1. Gently wet mist the surface to be scraped with water, then remove all loose paint with scraper and putty knife.
2. Sand existing surfaces to dull sheen and gloss. Before sanding, wet mist the area to be sanded. (Power sanding without a HEPA-filtered vacuum recovery system is not allowed).
3. Remove dust by washing with water, using damp sponge or cloth.
4. After washing, spot prime grease and water stains; magic markers marks, crayon marks, lipstick marks, etc; with a quick-drying alcohol base primer sealer to prevent bleeding.
5. Fill all cracks and holes with appropriate filler material, wet mist and sand flush with adjacent surfaces and spot prime. (Power sanding without a HEPA-filtered vacuum recovery system is not allowed).
6. Existing paint that was not removed with scraper and which appears to be sound shall receive spackling compound around perimeter high spots and feathered out so that surface is smooth. Repair gouges created by the scraping process and other imperfections in the existing surface with spackling compound to provide a smooth, even finished surface.
7. Apply number of finish coats specified herein or as many as may be necessary to obtain the proper finish and completely cover the substrate.
8. Cement Plaster: Coat surfaces to be patched with an approved bonding agent. Patch with an approved mortar patching mix and finish to match texture of adjacent surfaces.



9. Existing Metal:
 - a. Prepare surfaces as indicated in Art. 3.02,C., Subparagraphs 1., 2., 3., 4., above.
 - b. Machine tool clean exposed steel to an SSPC-SP3 surface preparation.
 - b. For steel surfaces exposed to view, repair defects in surfaces to provide for an even plane in the new finish. Use auto-body filler to even out surface and sand smooth.

3.03 APPLICATION

A. General

1. No Work shall be performed where cement or plaster is being applied or is in the process of drying.
2. No Work shall be performed in spaces that are not broom clean and free of dust and waste.
3. Apply paint materials to produce smooth finished surfaces, free of brush or roller marks, drops, runs, or sags.
4. Paint materials shall be kept at a proper and uniform consistency.
5. Thin only when necessary to achieve best results.
6. Thinners shall be material recommended by manufacturer of paint, and in quantity as recommended.
7. Excessive use of thinner as indicated by variation in absorption, lack of "hide", thickness of dry film, mottled or streaky coat, shall be cause for rejection. Correct as directed.
8. Thinning of varnish or aluminum paint prohibited.
9. Apply all coats with brush or roller, varying slightly the color of succeeding coats. Spraying will not be permitted.
10. Brush out or roll on first or prime coat; work well into surface.



11. Each coat shall be inspected, approved and dry before proceeding with additional coats.
12. Allow at least 48 hrs for enamels to dry.
13. Avoid lapping of paint on glass, hardware, or other adjoining surfaces.
14. Apply no paint to operating units where sliding contact of metals is necessary for proper functioning of unit.
16. Painting is not required on walls or ceilings in concealed and inaccessible areas.
17. Do not paint over any code-required labels, such as Underwriter's Laboratories and Factory Mutual, or any equipment identification, performance rating, name or nomenclature plate.

3.04 FIELD QUALITY CONTROL

- A. The Commissioner reserves the right to require the following material testing procedures at any time, and any number of times during period of field painting:
 1. Measurement of dry film thickness (DFT) by use of a dry film thickness gauge in accordance with use and calibration requirements of Structural Steel Painting Council [SSPC], "Method of Measurement of Dry Paint Thickness with Magnetic Gauges".
 2. Engage services of an independent testing laboratory, recommended by the Commissioner, to sample paint being used. Samples of materials delivered to construction site will be taken, identified and sealed, and certified in presence of Contractor
 3. Testing laboratory will perform appropriate tests for any or all of the following characteristics: Abrasion resistance, apparent reflectivity, flexibility, washability, absorption, accelerated weathering, dry opacity, accelerated yellowness, recoating, skinning, color retention, alkali resistance and quantitative materials analysis.
 4. If test results show that material being used does not comply with specified requirements, Contractor shall be directed to stop painting Work, and remove non-complying paint; repaint surfaces



coated with rejected paint; remove rejected paint from previously painted surfaces if, upon repainting with specified paint, the two coatings are non-compatible.

- a. If the samples do not comply with requirements of the Specifications, costs of testing and remediation of rejected work shall be borne by Contractor.

3.05 CLEANING

A. General

Contractor shall clean-up behind each paint crew such that painting and clean-up will be a continuous uninterrupted operation. The practice of one general clean-up after completion of all painting will be strictly prohibited. This clean-up will include, but not be limited to the following:

1. Remove spots or defacement resulting from Work of this Section.
2. Retouch all damaged surfaces to leave Work in perfect finished condition.
3. If spots or defacement cannot be satisfactorily removed and retouched, re-finish the surfaces as directed.
4. Within the three foot work area created for removal and painting where existing paint is known or assumed to be lead-based all objects and surfaces shall be thoroughly HEPA vacuumed, wet-cleaned and HEPA vacuumed again. In rooms where the ceiling has been painted all surfaces and objects in the room shall be cleaned in this manner.
5. The contractor shall ensure that the objects and surfaces under protective covering are free of any dust or debris created during painting activities. If necessary, these objects and surfaces shall be wet cleaned and HEPA vacuumed.
6. The contractor shall conduct any cleaning deemed necessary by the independent environmental consultant.



7. Remove from premises all surplus paint materials, debris and any other rubbish resulting from the Work.
8. Leave storage space clean and in condition required for equivalent spaces in project.

3.06 PROTECTION

- A. Provide caution tape and/or locked entryways during paint removal activities in existing buildings to prevent access to the work area from unauthorized personnel.
- B. Provide "Wet Paint" signs to protect newly-painted finishes. Remove temporary protective wrappings provided by others for protection of their Work after completion of painting operations.
- C. At the completion of Work of other trades, touch-up and restore all damaged or defaced painted surfaces as directed by the Commissioner.

END OF SECTION 099123



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 13 48 13
ACOUSTICAL PANEL SYSTEMS

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. This section includes the fabrication of acoustical panels that when erected in accordance with the manufacturer's shop drawings to create the Acoustical Barrier System as shown on the drawings.

1.02 REFERENCES

- A. ASTM A653 - Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- B. ASTM A924 - Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
- C. ASTM C423 - Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
- D. ASTM E90 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- E. UL - Fire Resistance Directory and Building Material Directory.

1.03 SUBMITTALS

- A. Product Data: Manufacturer's complete and current product data for each product required, including complete installation requirements.
- B. Quality Control Submittals:



1. Certification: Manufacturer's written statement, certifying that the suspension system meets or exceeds the specified structural requirements.

1.04 DESIGN REQUIREMENTS

A. Structural: The entire enclosure shall be designed by the manufacture to be self supporting. Where wall loadings require additional structural strength, it shall be provided by heavier panel skins, additional internal longitudinal reinforcing members, and/or additional structural members. The assembeled structure shall not exhibit any panel joint deflections in excess of L/200, where L is the unsupported span length of any panel section within the completed enclosure.

B. Acoustical:

1. The manufacturer shall provide certified testing data obtained from an acoustical laboratory, listing sound absorption and transmission loss characteristics of the enclosure. When requested by the Commissioner, the manufacturer shall arrange to have a copy of all pertinent acoustical laboratory reports forwarded directly from the laboratory to the engineer.
2. The supplier of the Panels shall provide certified test data from an accredited independent Acoustical Laboratory giving sound absorption characteristics of the panels. When tested in accordance with ASTM C423 sound absorption coefficients shall not be less than:

Frequency, Hz	125	250	500	1000	2000	4000
Coefficient	.20	.50	.70	.90	.70	.60

3. The sound transmission loss values of the panel shall be tested in accordance with ASTM E90 and shall not be less than:

Frequency, Hz	125	250	500	1000	2000	4000
Transmission Loss, dB	20	25	35	45	50	50



1.05 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical units and framing system components to the Project Site in original, unopened packages and store them in a fully enclosed space protected against damage from moisture, direct sunlight, surface contamination, and other causes.
- B. Open ends of acoustical unit packages 24 hours before installation to stabilize moisture content and temperature.
- C. Handle acoustical units carefully to avoid chipping edges or damaging units in any way.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acceptable manufactures of the acoustical panels are as follows:
 - 1. Industrial Acoustical Company
(Rep. - Albert Weiss Products, Inc.
270 Madison Ave, New York, NY 10016
Phone: 212-679-8550)
 - 2. VAW Systems
(Rep. - Kane-Davey Associates, Inc.
2 Schooner Lane, Unit 12, Millford, CT 06460
Phone: 203-255-1354)
 - 3. Vibro-Acoustics
(Rep. - Metro Air Products
111 Omni Drive, Hillsborough, NJ 08844
Phone: 908-431-5556)
 - 4. McGill AirSilence LLC
2400 Fairwood Ave, Columbus, Ohio 43207
Phone: 614-829-1200
 - 5. or approved equal.



2.02 PANEL CONSTRUCTION

- A. All barrier wall panels shall be 4 inches thick, as noted on the drawings with a solid galvanized steel exterior shell and a perforated interior galvanized steel shell.
- B. The outer and inner shells shall be tack or spot welded to the perimeter and internal longitudinal steel channels and box internal closures, in such a manner and spacing that the panel assembly will not fail at the maximum operating loads specified in Design Requirements.
- C. The outer shell shall be constructed of galvanized steel with a minimum 16-gage thickness.
- D. The inner shell shall be constructed of galvanized perforated steel with a minimum 22-gage thickness. Perforations shall be 3/32" round holes, 3/16" on center providing approximately 28% open area.
- E. All perimeter and internal longitudinal steel channel members shall be constructed of ASTM A653 commercial-quality galvanized steel with a minimum 18 gage thickness.
- F. All steel panel surfaces, internal channels, and trim items shall be fabricated from zinc-coated steel with a dipped galvanized coating (minimum G-60 coating with class as determined by ASTM A924) and shall meet all requirements of ASTM A653 for commercial quality galvanized carbon steel.
- G. Panels shall have a tongue and groove joint construction.
- H. Panel shall be completely metal enclosed with interior cavity completely filled with acoustic grade fiberglass as described below:
 - 1. Media shall be incombustible, inert, acoustic quality, shot-free acoustic grade fiberglass with long, resilient fibers bonded with a thermosetting resin. Fiberglass density shall be as required to insure conformance with laboratory test data. Fiberglass shall be packed with a minimum of 5% compression during panel assembly. Media shall be bacteria, mildew, and fungus resistant and vermin proof, resilient such that it will not crumble or



break, and conforming to irregular surfaces. Media shall not cause or accelerate corrosion of aluminum or steel. Mineral wool will not be permitted as substitute for fiberglass.

2. No insulating materials shall be used that have a flame spread greater than 25 or a smoke developed greater than 50.

I. All materials shall be listed and labeled by Underwriters Laboratories Inc for fire hazard classification.

PART 3 EXECUTION

3.01 EXAMINATION

A. Examine substrates and structural framing scheduled to receive the barrier wall system for compliance with requirements specified. Do not install the Work until unsatisfactory conditions are corrected.

3.02 INSTALLATION

A. Install the panels to create the acoustical wall barrier as indicated on the drawings. Installation shall be in accordance with the manufacturer's shop drawings and recommendations. Verify the dimensions in field prior to fabrication.

B. All base channels shall be installed on the leveled parapet. Spacing of the base channel attachments shall be as outlined in the manufacture's standard details of assembly.

C. The perforated side of the acoustical panels shall be facing the Chiller Unit.

D. All assembly trim items shall be constructed of hot-dipped galvanized steel (minimum 18 gage thickness) and furnished in standard lengths to be field cut to the required dimensions. Spacing of sheet metal screws, application of sealant and position of trim shall be in accordance with the manufacturer's published erection and installation details.

E. Joint and trim shall be sealed with waterproofing sealant that is neoprene-phenolic mastic formulated to withstand temperatures from -20°F to +300°F. Sealant shall be formulated such that surface preparation of solvent cleaning is not necessary.



3.03 CLEANING AND ADJUSTING

- A. Comply with manufacturer's printed instructions for cleaning and touch-up of minor finish damage.

END OF SECTION 134813



SECTION 230501

BASIC HEATING, VENTILATING AND AIR CONDITIONING REQUIREMENTS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 SCOPE OF WORK

- A. Provide labor, materials, tools, machinery, equipment, and services necessary to complete the HVAC Work under this Contract. All systems and equipment shall be complete in every aspect and all items of material, equipment and labor shall be provided for a fully operational system and ready for use. Coordinate the work with the work of the other trades in order to resolve all conflicts without impeding the job progress.
- B. Examine the Electrical Drawings and other Divisions, and Sections of the Specifications in order to determine the extent of the Work required to be completed under this Division. Failure to examine all the Contract Documents for this Project will not relieve the Contractor of his/her responsibilities to perform the Work required for a complete fully operational and satisfactory installation.
- C. The Work includes but is not limited to the following systems, equipment and services:
 - 1. Start-up services shall be included in the bid.
 - 2. All systems, equipment and services specified herein shall be provided complete and ready for use.

1.02 RELATED WORK

- A. DDC General Conditions
- B. Division 26 Electrical Sections

1.03 SUBMITTALS

- A. General: Unless indicated otherwise in the specific technical section, if a particular product specified in the technical section is being provided, manufacturer's qualifications and samples (except as listed below), are not required to be submitted. Manufacturer's product data, installation



instructions, samples requiring color or texture approval, samples showing thickness and type of material, shop drawings, and calculations are to be submitted. Schedules, startup manuals, operation and maintenance manuals, and shop drawings are always required to be submitted.

B. The following Submittals are required for all Sections of Division 23-Heating, Ventilating, and Air Conditioning. Specific "Supplemental Submittals" or additional information to that listed below that are required to be submitted are defined in each individual technical section.

1. Product Data: Submit manufacturer's product data for equipment including catalog sheets or cuts, specifications, capacity, performance charts, test data, materials, dimensions, weights, furnished specialties and accessories; and installation instructions. Submit start-up instructions where applicable.

2. Shop Drawings: Submit manufacturer's shop drawings detailing equipment assemblies and indicating dimensions, weight, loadings, required clearances, method of field assembly, components, location and size of each field connection.

C. Where indicated in the Supplemental Submittals of the technical sections, the following submittals are defined as follows:

1. Maintenance Data: Submit maintenance data and parts list. Include this data and the product data in the maintenance manual.

2. Test Report: Submit factory certified test results prior to shipping.

3. Certificates: Submit written affidavit stating that the Contractor has started up and demonstrated (in the presence of the Commissioner that the equipment is operating properly as designed.

D. Piping, Ductwork, and Wiring Diagrams: Submit a complete wiring diagram, ductwork layout, and piping layout of all equipment. All parts of the installation shall be indicated exactly as installed and shall be properly identified. Valve identification numbers shall agree with valve tags of Section 230553: HVAC Identification and all piping shall be clearly shown and labeled.

E. Coordination Drawings: Provide complete coordination Drawings showing interface of all mechanical trades with the



Architecture of the Building. All copies are to be signed. The Contractor is to keep a copy of the signed coordination drawing on the site.

F. Miscellaneous Submittals

1. HVAC Painting Schedule: Provide a complete schedule of all items to be painted.

1.04 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: If a particular product specified in the technical section is not being provided, provide manufacturer's qualifications.

Provide manufacturer's qualifications that indicate that the firms are regularly engaged in manufacture of equipment, of types, materials, and sizes required, whose products have been in satisfactory use in similar service for not less than three years.

- B. Codes and Standards: All equipment furnished and installed shall meet or exceed the referenced Standards and Codes in all respects - installation, performance, etc.

- C. References and industry standards listed herein and in other HVAC Sections are applicable to the Work specified in the Section. Unless more restrictive criteria is explicitly called-out for in other HVAC Specifications or mandated by the Building Code, the requirements described in the referenced standards below shall be deemed applicable to the Work. This includes language in the documents in the form of a recommendation or suggestion, which shall be deemed as mandatory.

1. NFPA
2. NYC BUILDING CODE
3. ASHRAE
4. SMACNA
5. ELECTRICAL IEEE STANDARDS
6. STATE DEC REGULATIONS
7. NYCDEP DEPARTMENT OF AIR RESOURCES CRITERIA
8. ASME
9. ANSI
10. NY INDUSTRIAL CODE RULE 4
11. ABMA
12. UL
13. LOCAL LAWS
14. NCPWB
15. FCI
16. EJMA



- 17.MSS
- 18.ABMA
- 19.IRI
- 20.MEA
- 21.AABC
- 22.NEBB
- 23.ARI
- 24.AMCA
- 25.ADC
- 26.NEMA
- 27.NEC
- 28.ASTM
- 29.FCI

D. All appliances regulated by the New York City Construction Codes shall be listed and labeled (reference MC 301.4, MC 301.6). Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

1.05 ACCESSIBILITY

- A. Install access for servicing and maintenance. Coordinate the final location of concealed equipment and devices requiring access with final location of access panels and doors. Allow ample space for removal of all parts that require replacement or servicing.
- B. Extend all grease fittings to an accessible location.
- C. For access doors to valves, dampers and all other HVAC type of items, accessories and equipment, concealed in walls, furrings and hung ceilings; Refer to Section 233301. Door shall permit full access to the equipment.

1.06 ROUGHING-IN

- A. Verify final locations for roughing work with field measurements and with the requirements of the actual



equipment being connected. Coordinate with General Construction drawings.

1.07 MECHANICAL INSTALLATIONS

- A. Coordinate HVAC equipment and materials installation with other building components.
- B. Verify all dimensions by field measurements.
- C. Arrange for chases, slots, and openings in other building components to allow for HVAC installations.
- D. Coordinate the installation of required supporting devices and size of sleeves to be set in poured concrete and other structural components as they are constructed.
- E. Sequence, coordinate, and integrate installations of HVAC materials and equipment for efficient flow of the Work. Give particular attention to large equipment requiring positioning and entrance prior to the close of the building.
- F. Coordinate the cutting and patching of building components to accommodate the installation of HVAC equipment and materials.
- G. Where mounting heights are not detailed or dimensioned, install HVAC services and overhead equipment to provide the maximum headroom possible.
- H. Install HVAC equipment to facilitate maintenance and repair or replacement of equipment components. As much as practical, connect equipment for ease of disconnecting and minimum of interference with other installations.
- I. Coordinate the installation of HVAC materials and equipment above ceilings with suspension system, light fixtures, and all other installations and accessories.
- J. Provide all rigging, disassembly and reassembly of equipment including the furnishing and installation of dunnage and all other required and necessary accessories.

1.08 COORDINATION DRAWINGS

- A. Provide coordination drawings. Coordination drawings shall be completed in accordance with the CPM Schedule so as not to delay the progress of the Project, for example, the installation of any floor slab in which the placing of mechanical equipment (sleeves, inserts, conduits, and all other accessory items) is involved.



1.09 CUTTING AND PATCHING

- A. Do not endanger or damage installed Work through procedures and processes of cutting and patching.
- B. Arrange for repairs required to restore the work, because of damage caused as a result of HVAC installations.
- C. No additional compensation will be authorized for cutting and patching Work that is necessitated by defective or non-conforming installations.
- D. Perform cutting, fitting, and patching of HVAC equipment and materials required to:
 - 1. Remove and replace defective work.
 - 2. Remove and replace work not conforming to requirements of the Contract Documents.
 - 3. Remove samples of installed work as specified for testing.
 - 4. Install equipment and materials in existing structures.
 - 5. Cut, remove and legally dispose of selected HVAC equipment, components, and materials as indicated, including, but not limited to removal of HVAC piping, heating units and trim and other HVAC items made obsolete by the new work.
 - 6. Protect the structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.
- E. Locate identify, and protect HVAC services passing through remodeling or demolition area and serving other areas required to be maintained operational. When transit services must be interrupted, provide temporary services for the affected areas.

1.10 MATERIALS

- A. Refer to DDC General Conditions for requirements. The following paragraph supplements this Section.
- B. In addition, since manufacturing methods vary, reasonable minor variations are expected; however, performance and material requirements are the minimum standards acceptable.

1.11 EQUIPMENT NOISE AND VIBRATION



- A. It is contractor's responsibility to control equipment noise and vibration to comply with NYC Local Law 113 and NYC Mechanical Code Section MC 926:
 - 1. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the fore-going noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 7, Sound and Vibration.
 - 2. Contractor shall perform testing/reporting to establish ambient baseline noise level (ambient, directional) of new outdoor equipment after completion of installation.
 - 3. Noise level testing, manufacturer's equipment operation performance documentation and proposed supplementary noise control measures shall be submitted to Consultant for review/approval.
- B. The vibration shall not be apparent in occupied areas of the building. Both the balancing of rotating machinery and the installation of vibration isolation at various locations are required. Provide as detailed in Specification Section 230549, Vibration Isolation.
- C. Obtain equipment that is quiet in operation as compared to other available equipment of its size, capacity, and type; install equipment so that a minimum amount of noise and/or vibration is transmitted to the building; and fabricate the duct system so that air noises generated in the system are held to an absolute minimum.
- D. Precautions deemed necessary to provide a quiet installation shall be done as part of the Work of this Project. After the system is in operation, make changes to equipment or Work installed so that the noise criteria defined in the New York City Building Code are adhered to:

Location	Noise Criteria Standard (NC)
Reading Areas	30-40
Conference Room	25-35
Private Offices	25-35
Lounge	35-40
Toilets	45-50



- E. Adjust all the equipment RPM, noise production and vibration in order to avoid any production of resonance in any system.

1.12 EQUIPMENT GUARDS

- A. Provide easily removable expanded metal guards for all belts, couplings, exposed fan inlets and outlets, and other moving parts of machinery. Provide tachometer openings in the guards at least 2" in diameter, for all belt-driven or variable speed machinery. Equipment guards shall comply with OSHA requirements.
- B. Guards shall be provided where appliances, equipment, fans or other components that require service are located within 10 feet of a roof edge or open side of a walking surface and such edge or open side is located more than 30 inches above the floor, roof or grade below. The guard shall extend not less than 30 inches beyond each end of such appliances, equipment, fan or component and the top of the guard shall be located not less than 42 inches above the elevated surface adjacent to the guard. The guard shall be constructed so as to prevent the passage of a 21-inch-diameter sphere and shall comply with the loading requirements for guards specified in the New York City Building Code. (Refer to BC 1012, FGC 306.6, MC 304.10).

1.13 ELECTRICAL CHANGES TO MECHANICAL EQUIPMENT

- A. If any changes made in equipment submitted are approved especially as to the sizes of the motors, notify Electrical.

1.14 DELIVERY, STORAGE, AND HANDLING

- A. Handle equipment carefully to prevent damage, breaking, denting, and scoring. Do not install damaged units or components; replace with new.
- B. Store equipment in clean dry place. Protect from weather, dirt, fumes, water, construction debris, and physical damage.
- D. Comply with manufacturer's rigging and installation instructions for unloading equipment, and moving them to final location.

1.15 RECORD DOCUMENTS

- A. Refer to the DDC General Conditions for requirements. The following paragraph supplements the requirements of those Sections:



Mark Drawings to indicate revisions and date of revisions.
Mark Specifications to indicate approved substitutions;
Change Orders; actual equipment and materials used.

1.16 GUARANTEES, WARRANTIES, BONDS, AND MAINTENANCE CONTROL

A. Refer to DDC General Conditions for procedures and submittal requirements for warranties. Refer to individual equipment specifications for warranty requirements.

1. Compile and assemble the warranties specified for HVAC work into a separated set of documents, tabulated and indexed for easy reference.
2. Provide complete warranty information for each item to include product or equipment including duration of warranty or bond; and names, addresses, and telephone numbers and procedures for filing a claim and obtaining warranty services.
3. Unless otherwise noted in the specific sections, warranties for the equipment, workmanship and materials shall be provided for the period of one year. Exceptions include, but are not limited to, the five - (5) years manufacturer warranty provided for the refrigeration compressors and AHU heating and cooling coils.
4. Manufacturers', not Contractors' warranties, shall be provided for all HVAC equipment and accessories.
5. All warranties are to start from the date of Substantial Completion.

1.17 OPERATIONS, INSTRUCTION, AND MANUAL

A. Refer to DDC General Conditions for procedures and requirements for preparation and submittal of operation and maintenance manuals of each HVAC equipment. Refer to individual equipment specifications for maintenance manual additional requirements. In addition, include the following information:

1. Description of function, normal operating characteristics and limitations, performance curves, engineering data and tests, and complete nomenclature and commercial numbers of all replaceable parts.
2. Manufacturer's printed operating procedures to include start-up, break-in, routine and normal operating instructions; regulation, control, stopping, shut-down, and emergency instructions; and summer and winter operating instructions.



3. Maintenance procedures for routine preventative maintenance and troubleshooting; disassembly, repair, and reassemble; aligning and adjusting instructions.
 4. Servicing instructions and lubrication charts and schedules.
- B. Bind all the other Sections maintenance manuals in a single final Operating and Maintenance Manual with the requirements of DDC General Conditions.
- C. Refer to DDC General Conditions for procedures and requirements for instruction on each HVAC equipment. Refer to individual equipment specifications for the additional instruction requirements.

1.18 PAINTING

- A. Paints and coatings used in the interior of the building to cover insulation for identification purposes shall not:
1. Exceed the VOC content limits established in the Green Seal Standard GS-11 Paints, First Edition, May 20, 1993.
- B. Paints and coatings used in the interior of buildings to mark piping for identification purposes shall not:
1. Exceed the VOC content limits established in the Green Seal Standard GS-11 Paints, First Edition, May 20, 1993.
 2. Exceed the VOC content limit of 250 g/l established in the Green Seal Standard GC-03, Anti-Corrosive Paints, Second Edition, January 7, 1997.
- C. All adhesives and sealants shall comply with the South Coast Air Quality Management District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond to an effective date of the SCAQMD Rule #1168 of July 1, 2005 and Rule Amendment date of January 7, 2005.
- D. Refer to Section 099123: Painting for materials and method of application and follow all the requirements specified in the Section.
- E. Painting Schedule
1. No on-site painting is required on the following items unless specifically indicated otherwise:
 - a. Concealed metal and piping.
 - b. Chromium plated piping and chromium plated metal.



- c. Stainless steel sheet metal.
- d. Stainless steel piping.
- e. Piping or ductwork to be insulated.
- f. Insulation on piping or ductwork in unfinished spaces or concealed.
- g. Insulated piping covered with stainless steel, aluminum, polyvinyl chloride, or all service jacketing, unless otherwise specified.
- h. Insulated piping in walk-in and non-walk-in tunnels.
- i. Mechanical equipment with a factory applied baked-on enamel finish, not specified to be insulated or provided with an enameled steel insulated jacket.
- j. Insulated equipment noted on the Drawings to be covered with stainless steel or aluminum sheet metal jacketing or insulated cement finish.
- k. Factory fabricated double wall insulated metal vents.

2. Paint the following:

- a. Uninsulated Black Steel Piping:
 - 1) Exposed in Finished Rooms or Finished Spaces: 1 coat of primer and 2 coats of latex semi-gloss enamel.
 - 2) Exposed in Unfinished Rooms, or Unfinished Spaces, or in Pipe Shafts: 1 coat of primer and 2 coats of finish.
 - 3) Exposed Exterior to a Building: 1 coat of primer and 2 coats of exterior acrylic latex semi-gloss enamel.
- b. Uninsulated Galvanized, Cast Iron, Brass or Copper Piping:
 - 1) Exposed in Finished Rooms or Finished Spaces: 1 coat of primer and 2 coats of latex semi-gloss enamel.



- 2) Exposed Exterior to a Building: 1 coat of primer and 2 coats of exterior acrylic latex semi-gloss enamel.
 - 3) Exposed in Unfinished Rooms or Unfinished Spaces: 1 coat of primer and 2 coats of finish.
- c. Jacketing on Insulated Piping: exposed, in Finished Rooms or Finished Spaces: 2 coats of latex semi-gloss enamel. No primer required.
- d. Jacketing on Insulated Equipment:
- 1) For Below Ambient Temperatures, Exposed in Finished Rooms or Finished Spaces: 2 coats of latex semi-gloss enamel. No primer required.
 - 2) For Above Ambient Temperatures, Exposed in Finished Rooms or Finished Spaces: 1 coat of varnish size (FS TT-P-56B) primer and 2 coats of latex semi-gloss enamel.
- e. Flexible Foamed Plastic Insulation on Piping, Ductwork and Equipment:
- 1) Exposed in Finished Rooms or Finished Spaces: 2 coats of Armaflex Finish by Armstrong or Armacell. No primer required.
 - 2) Exposed Exterior to a Building: 2 coats of Armaflex Finish by Armstrong or Armacell. No primer required.
- f. Piping in floor trenches after fabrication: primer and finish.
- g. Uninsulated Mechanical Equipment: furnished with a factory applied prime coat finish: 2 coats of acrylic latex semi-gloss enamel. No primer required.
- h. Vessels, Tanks, and Like Equipment Specified to be insulated: 1 coat of corrosion resistant paint, prior to the application of insulation.
- i. Uninsulated Exposed Iron and Steel Surfaces of Boilers, Including the Steel Casing, Buck Stays, Boiler Fronts, Castings, and the Exposed Surfaces of all Other Iron or Steel Installed in Conjunction with Boiler Work: 1 coat of primer and 2 coats of heat resistant enamel.



- j. Insulation Finish on Field Fabricated Boiler Smoke Breeching: 1 coat of varnish size (FS TT-P-56B) and 2 coats of latex semi-gloss enamel.
- k. Hangers, Supports, Restraints and Accessories:
 - 1) Exposed: Paint to match adjacent piping, pipe insulation or ductwork insulation.
 - 2) All black steel or iron pipe hangers, rods, inserts, brackets, restraints, and accessories for supporting piping systems and duct systems: 1 coat of primer and 2 coats of latex semi-gloss enamel. Paint black steel hanger rods, threaded on the job site, with a primer immediately after installation.
 - 3) Metal Fabrications in Finished Spaces: Paint over shop coat with 2 coats of alkyd gloss enamel.
- l. Sheet Metal Work:
 - 1) Exposed Black Iron, Galvanized Iron, and Aluminum, including Hangers for Insulated and Uninsulated Ductwork, in Finished Rooms, Finished Spaces or Exterior to a Building: 1 coat of primer and 2 coats of latex semi-gloss enamel.
 - 2) Jacketing on Exposed Insulated Ductwork in Finished Rooms and Finished Spaces: 2 coats of latex semi-gloss enamel. No primer required.
- m. Uninsulated Exposed Valves, Flanges, Unions and Irregular Surfaces in Piping Systems Installed in Finished Rooms or Finished Spaces: 1 coat of primer and 1 coat of black heat resistant enamel.

F. Color Coding:

- 1. Apply finish paints of colors indicated opposite the various items listed below where such items are installed in Mechanical Equipment Rooms, Machine Rooms, Boiler Rooms, and Penthouse Mechanical Equipment Rooms:

- a. Piping, Exposed - Bare and Insulated on Unfinished Spaces and Rooms:

Refrigerants

Green



Water - Boiler Make Up
Water - Unsafe

Light Green
Yellow

2. Piping Not Listed Above: Color code by classification as follows:

Dangerous Materials	Yellow or Orange
Safe Materials	Green
Valuable Materials	Purple
3. Ductwork: Grey.
4. Equipment - Bare and Insulated (Except Factory Painted): Gray.

1.19 ADJUSTING AND CLEANING

- A. Refer to DDC General Conditions for general requirements for final cleaning.
- B. Alignment: Check alignment, and where necessary, realign equipment within recommended tolerances by the manufacturer and in presence of manufacturer's service representative and the Commissioner.

1.20 TORCH BURNING OPERATION

- A. The storing and use of oxygen and combustible gases in conjunction with torch burning apparatus is subject to the Rules and Regulations of the Division of Fire Prevention of the Fire Department of the City of New York, latest Fire Prevention (F.P.) Directive. Fire watches shall be provided during all operations using torches for burning, cutting or welding.
- B. Contractor shall apply for and obtain permits for the use and storage of such equipment on school premises. The operator of such equipment shall have a certificate of fitness issued by the NYC Fire Department.
- C. The cost of permits, certificates, fire watches, apparatus and other items required in the torch burning operation shall be borne by the Contractor at no additional cost to the City of New York.

1.21 SPECIAL INSPECTIONS/TESTS

- A. The following Special Inspections are required by the NYC Building Code for the HVAC Trade:



Item	Code Section
Mechanical Systems	BC 1704.15
Heating Systems	BC 1704.23
Chimneys	BC 1704.24
Seismic Isolation Systems	BC 1707.7 & 8

B. The following Periodic Special Inspections are required by the NYC Building Code for HVAC Systems:

Item	Code Section
Fire Dampers	BC 109.3.4
Energy Code Compliance	BC 109.3.5
Through-penetration Firestop Systems	BC 1704.25

C. Tests of Mechanical Systems shall be performed in accordance with the following Sections of the New York City Mechanical Code:

Item	Code Section
Chimneys	MC 810
Noise Control	MC 926
Boilers and Pressure Vessels	MC 1011
Refrigeration Systems	MC 1108
Hydronic Piping Systems	MC 1208

PART 2 - PRODUCTS (Not applicable)

PART 3 - EXECUTION

3.01 INSPECTION

A. Examine areas and conditions under which equipment is to be installed. Do not proceed with work until conditions are suitable.

3.02 INSTALLATION

A. Install equipment in accordance with manufacturer's installation instructions. Install units plumb and level, firmly anchored in locations indicated, and maintain manufacturer's recommended clearances.

B. Support: Install equipment on 4" high concrete pad when installed on floor, with vibration isolators and restraints as required.

C. Accessories: Install equipment accessories not installed at factory and shown on the Drawings.

D. Connections: Connect all equipment and accessories as recommended by manufacturer for a complete installation.



- E. Contractor shall not leave sharp exposed metal edges (bottom of threaded rods, mechanical equipment supports, etc.) that could otherwise present safety hazards to the building's occupants/work staff.
- F. Access and service space shall be per MC 306.1 - Clearances for maintenance and replacement: Clearances around appliances to elements of permanent construction, including other installed equipment and appliances, shall be sufficient to allow inspection, service, repair or replacement without removing such elements of permanent construction or disabling the function of a required fire-resistance-rated assembly.

3.03 START-UP AND DEMONSTRATION/INSTRUCTION/SERVICE

- A. Start-Up and Demonstration/Instruction: The Contractor shall start-up and demonstrate, in the presence of the Commissioner the proper operation of all equipment provided in this Contract. The Contractor shall perform necessary Interdisciplinary Tests and Functional Performance Tests (FPT) as listed in each technical Specification Section required by the Contract. The Contractor shall also provide instruction to the Commissioner.
- B. Service: Provide the services of a competent field service representative to furnish service to the facility during construction and during the warranty period. Service must be performed within 48 hours from the time of notification (24 hours for emergencies).

3.04 ADJUSTING AND CLEANING

- A. Cleaning: Clean factory-finished surfaces. Repair any marred or scratched surfaces with manufacturer's touch-up paint.

3.05 SPARE PARTS

- A. Provide a set of spare parts that may be normally required, such as belts, filters, etc. that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

3.06 TESTING

- A. The Contractor shall furnish energy, fuel, oil, water, air, light and electrical instruments as required for all testing. Reference Section 230593, Cleaning and Testing.

END OF SECTION 230501



SECTION 230503
HVAC PIPING

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide pipes, pipe fittings, pipe specialties, and pipe supports as shown on the Drawings, and as needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements, shall be referred to for general requirements.

1.02 DESIGN AND PERFORMANCE REQUIREMENTS

A. Heating Hot Water Piping

Operating Pressure	125 psig
Operating Temperature	150° - 250° F
Design Code (ANSI)	B31.9

B. Refrigerant Piping

Operating Pressure	450 psig
Operating Temperature	40° - 120° F
Design Code (ANSI)	B31.5

1.03 RELATED SECTIONS

- A. Division 23 Sections

1.04 SUPPLEMENTAL SUBMITTALS

- A. Shop Drawings: Submit schedule showing pipe or tube weight, fitting and joint type for each piping system; size, location and feature for each piping specialty, hanger and support.
- B. Welding Certifications: Submit reports as required for piping work.
- C. Brazing Certifications: Submit reports as required for piping work.

1.05 SUPPLEMENTAL QUALITY ASSURANCE



A. Codes and Standards

1. Welding: Qualify welding procedures, welders and operators in accordance with ASME B31.1, or ASME B31.9, as applicable, for shop and project site welding of piping work and ASME Boiler and Pressure Vessel Code, Section IX, Part QW Welding.
2. Certify welding of piping work using Standard Procedure Specifications by, and welders tested under supervision of, National Certified Pipe Welding Bureau (NCPWB).
3. Brazing: Certify brazing procedures, brazers, and operations in accordance with ASME Boiler and Pressure Vessel Code, Section IX, Part QB Brazing for shop and job-site brazing of piping work.
4. Fluid Control Institute (FCI) Compliance: Test and rate "Y" type strainers in accordance with FCI 73-1: Pressure Rating Standard for "Y" Type Strainers. Test and rate other type strainers in accordance with FCI 78-1: Pressure Rating Standard for Pipeline Strainers Other than "Y" Type.
5. Manufacturers Standardization Society of The Valve and Fittings Industry (MSS) Compliance: Comply with:
MSS SP-58 Pipe Hangers and Supports - Materials, Design and Manufacture.
MSS SP-69 Pipe Hangers and Supports - Selection and Application.
MSS SP-89 Pipe Hangers and Supports - Fabrication and Installation Practices.
 - a. Piping shall be supported at distances not exceeding the spacing specified in MC Table 305.4 or in accordance with the above MSS standards.
6. New York City Construction Code: Comply with the New York City Building Code, Mechanical Code, Fuel Gas Code, Plumbing Code and Fire Code.
7. Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall



be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

PART 2 - PRODUCTS

2.01 PIPES

A. Pipe used shall be free from scale or rust. Each length of pipe shall be properly marked at the mill for proper identification with name or symbol of manufacturer. Dimensions for steel pipe shall be in accordance with the ANSI B36.10.

B. Steel Pipe

1. Black or Galvanized; Standard Weight: Schedule 40

a. Steel Pipe for Threading: Type F, E or S, ASTM A53; ASTM A135 or A106.

b. Bending, Coiling, and Flanging: ASTM A53, Grade A, Type E or S, ASTM A135 or ASTM A106.

c. Grooved End Type: Schedule 40, ASTM A53 Grade A, Type F for sizes 3/4" to 1-1/2", and ASTM A53 Grade B Type E or ASTM A53 Grade B Type S for sizes 2" to 24"; or ASTM A135 or ASTM A106.

2. Steel pipe shall be manufactured by:

- a. Koppel Steel Corp.
- b. North Star Steel Co.
- c. Sawhill Tubular Co.
- d. Sharon Tube Co.
- e. U.S. Steel Co.
- f. Wheatland Tube Company
- g. Or approved equal.

D. Copper Tubing



1. Hard-Drawn Temper, Water Tube Type L: ASTM B88. Refrigerant Piping: ACR Tube: ASTM B280. Other refrigerant pipe and tubing options are as defined in MC 1107.4
2. Copper tubing shall be manufactured by:
 - a. Mueller Industries
 - b. NIBCO Inc.
 - c. Phelps-Dodge Copper Products Corp.
 - d. Revere Copper and Brass Inc.
 - e. Or approved equal.

2.02 FITTINGS

A. Steel, Malleable/Cast Iron

1. Steel Fittings, except couplings and unions, 2-1/2" and less: Threaded pattern, standard weight, black cast iron.
2. Flanges, Welding Neck Type, Same Pressure Rating as Adjoining Pipe: ANSI/ASME B16.5. Welding flanges shall be socket type.
3. Weld Fittings, Carbon Steel: Butt Welding Type: ANSI/ASME B16.9: Allied Piping Products Co., Inc.'s Branchlets, Type 1 or 2 or Bonney Forge Corp.'s Weldolets; Socket Welding Type: ANSI/ASME B16.11 Allied Piping Products Co., Inc.'s Branchlets, Type 1 or 2 or Bonney Forge Corp.'s Thredolets or Sockolets.
4. Grooved End Type: Steel: Ductile iron, ASTM A536 Grade 65-45-12; Malleable Iron: ASTM A47.
5. Malleable Iron, Steam Pattern Threaded: ANSI/ASME B16.3 for 150 lb Class and 300 lb Class.
6. Cast Iron, Steam Pattern Threaded: ANSI/ASME B16.4, Flanged Fittings and Threaded Flanges: ANSI/ASME B16.1 for standard weight pipe: Class 125 and for extra heavy weight pipe: Class 250.
7. Steel and malleable/cast iron pipe fittings shall be manufactured by:
 - a. Anvil International Inc. (Formerly Grinnell)
 - b. CIFUNSA Marketing, Inc.
 - c. Smith-Cooper International
 - d. Tube-Line



- e. Victaulic Co. of America
- f. Ward Manufacturing
- g. Weldbend Corporation
- h. TYCO Grinnell Mechanical Products
- i. Or approved equal.

B. Brass

- 1. Malleable brass, threaded pattern; flanges, brass for use in brass pipe or copper tubing systems: Flanges shall conform to the Standards for fittings used in the systems. Brazing Flanges, With or Without Pre-inserted Rings of Brazing Alloy: ASME B16.15, with hubs modified for brazing ends. Brass fittings shall conform to ASTM F 1974 per MC Table 1202.5.
- 2. Brass Fitting shall be manufactured by:
 - a. Anvil International Inc. (Formerly Grinnell)
 - b. Elkhart Products Corp.
 - c. Lee Brass/S. G. Flagg Co.
 - d. Mueller Industries
 - e. NIBCO Inc.
 - f. Smith-Cooper International
 - g. Or approved equal.

C. Unions 3" Size and Under: Steel: malleable iron, 300 lb class, with brass to iron or brass to brass seats and bronze to bronze, bronze to iron, or brass to iron ground joint, except as otherwise specified. The pressure rating shall be indicated on the union.

- 1. Unions for Use in Brass Pipe or Copper Tubing Systems, 2" and under: Cast bronze, 150 lb Class, with bronze to bronze seats; with screw, brazing or solder ends, or with adapters as required.
- 2. Union shall be manufactured by:
 - a. Anvil International Inc. (Formerly Grinnell)
 - b. E.M. Dart Co.
 - c. NIBCO Inc.
 - d. S.G. Flagg Co.
 - e. Smith-Cooper International
 - f. Weldbend Corporation
 - g. Or approved equal

D. Fittings for Type "L" copper tubing shall be wrought copper solder joint fittings suitable for brazing and



shall be in accordance with ANSI B16.22. Type "L" fittings shall have a minimum working water pressure of 150 p.s.i. Alternately, hydronic fittings for hot water piping and chilled water piping may be press fittings by Viega ProPress (or approved equal) up to and including 4 inches in diameter.

1. Flux for brazing shall be equal to "Handy Flux" and shall comply with Navy Dept. Spec. 51F 4a., Airgas, ESAB. Or approved equal.
 2. The silver brazing alloy for brazed joints shall be similar to Handy & Harmon Sil-Fos brazing alloy having a silver content of not less than 15% and a flow point of 1300° Fahrenheit, Airgas, ESAB, or approved qual.
 3. Alternately, fittings for Type "L" copper tubing may be cast bronze threaded fittings, Class 125 working steam pressure, conforming to ASTM B62 and ASME B16.24.
 4. Type "L" fittings shall be manufactured by:
 - a. Elkhart Products Corp.
 - b. Mueller Industries
 - c. NIBCO Inc.
 - d. S. G. Flagg & Co.
 - e. Smith-Cooper International
 - f. Viega ProPress
 - g. Or approved equal.
- E. Mechanically formed tee-branch outlets (refer to MC 1203.3.8) may be used on aboveground copper tubing. The mechanically formed outlet shall be by T-Drill Industries, Inc., Coper Development Assoc. Inc., or approved equal. All joints formed in this manner shall be brazed in compliance with MC 1203.3.8.2 and manufacturer's recommendations. Soft soldered joints shall not be permitted.
- F. Couplings: Same material and pressure rating as adjoining pipe, conforming to standards for fittings in such pipe. Use taper tapped threaded type in screwed pipe systems operating in excess of 15 psig.
- G. Grooved Joints - for Steel Piping: Rolled or cut grooves, Pipe: Carbon Steel, ASTM A-53, or ASTM A-106, EPDM gaskets; Housing: Ductile Iron or Malleable Iron. System shall be designed for flexible or rigid installation.



Welded flanges shall be used at equipment connections, and for maintenance removal sections. Manufacturers: Victaulic, Anvil International Inc/Gruvlok 7400 Rigidlite, or TYCO Grinnell Mechanical Products, or approved equal

H. Nipples: same material and strength as adjoining pipe, except nipples having a length of less than 1" between threads shall be extra heavy. Manufacturer: Allied Piping Products, Babcock & Wilcox, Crane Co., Tube Turns and Smith-Cooper International, or approved equal.

2.03 FLEXIBLE CONNECTIONS

A. Corrugated inner tube and outer shield of wire braid: Stainless steel. Maximum working pressure at room temperature: 850° F and pressure safety factor of 4:1

B. Corrugated inner tube and outer shield of wire braid: Bronze. Maximum working pressure at room temperature up to 150° F. Manufacturer: Metraflex Co. or Flex-Hose Co., Inc.

C. Flexible Hose/Connections, stainless steel shall be manufactured by:

- a. Allied Metal Hose Inc.
- b. Flexaust Co.
- c. Flex-Hose Co., Inc.
- d. Mason Industries (Type BSS)
- e. Metraflex Co.
- f. Wheatley Pump & Valve Inc.
- g. Or approved equal

2.04 GALVANIZING

A. Galvanizing Pipe and Fittings: hot dip process, inside and out in accordance with ASTM or other nationally recognized specifications to which pipe and fittings conform. Galvanize before threading.

2.05 JOINING AND SEALANT MATERIALS

A. Solder: solid wire type conforming to type 2: 95-5

B. Gasket Material

1. For Use with Cold Water: 1/16" thick rubber.

2. For Use with Hot Water: Waterproofed non-asbestos mineral, or ceramic fiber, or spirally wound



stainless steel V-shaped strip with non-asbestos filler and an outer steel compression ring, designed for the temperatures and pressures of the piping systems.

- C. Bolts and Nuts: heat treated carbon steel, ASTM A183 minimum tensile 110,000 psi.
- D. Thread sealant shall be a slow-drying formula that shall not harden or crack in the pipe joint. Sealant shall meet Fed. Spec. TT-S-1732. Sealant shall seal all types of pipe threads.
 - 1. Thread sealant to be used on fuel oil and diesel piping shall be RectorSeal Corp No. 5, Oatey Great Blue pipe joint compound, or approved equal. Sealant shall be a non-toxic, soft setting, slow drying thread sealant made from inert fillers. The joint compound shall not contain any Teflon.
 - a. Teflon tapes shall not be used in fuel oil and diesel lines.

2.06 PIPING SPECIALTIES

- A. Provide factory-fabricated piping specialties recommended by manufacturer for use in service indicated.
- B. Pipe Escutcheons
 - 1. Provide pipe escutcheons as specified herein with inside diameter closely fitting pipe outside diameter or outside of pipe insulation where pipe is insulated. Select outside diameter of escutcheon to completely cover pipe penetration hole in floors, walls, or ceilings; and pipe sleeve extension, if any. Provide pipe escutcheons with nickel or chrome finish for occupied areas, prime paint finish for unoccupied areas.
 - a. Pipe Escutcheons for Moist Areas: For waterproof floors and areas, where water and condensation can be expected to accumulate, provide cast brass or sheet brass escutcheons, solid or split hinged.
 - b. Pipe Escutcheons for Dry Areas: Provide sheet steel escutcheons, solid or split hinged.
 - 2. Manufacturers:



- a. Chicago Specialty Mfg. Co.
- b. Producers Specialty & Mfg. Corp.
- c. Sanitary-Dash Mfg. Co.
- d. Or approved equal

C. Strainers: Low Pressure Y-Type Pipeline Strainers:

1. Provide strainers full line size of connecting piping with ends matching piping system materials. Select strainers for 125 psi working pressure with perforated stainless-steel basket with 50 percent free area. Perforation or mesh size shall depend on strainer size and/or material being strained.
 - a. Threaded Ends, 2-1/2" and Smaller: Cast-iron body, screwed screen retainer with centered blow down fitted with pipe plug.
 - b. Flanged Ends, 3" and Larger: Cast-iron body, bolted screen retainer with off-center blow down fitted with pipe plug.
 - c. Butt Welded Ends, 3" and Larger: Schedule 40 cast carbon steel body, bolted screen retainer with off-center blow down fitted with pipe plug.
 - d. Grooved Ends, 2-1/2" and Larger: Tee or Wye Type, ductile-iron or malleable-iron body and access end cap, access coupling with EDPM gasket.

2. Manufacturers:

- a. Armstrong Machine Works.
- b. Conbraco Industries, Inc.
- c. Hoffman Specialty ITT; Fluid Handling Div
- d. O.C. Keckley Company
- e. Metraflex Co.
- f. Victaulic Co. of America
- g. TYCO Grinnell Mechanical Products
- h. Or approved equal

D. Dielectric Unions:

- a. Provide products which effectively isolate ferrous from non-ferrous piping (electrical conductance), prevent galvanic action, and stop corrosion. Per MC 1203.1.1 and 1303.1.1 joints between different metallic piping materials shall be made with approved dielectric fittings or brass converter fittings.



2. Manufacturers:

- a. B&K Industries, Inc.
- b. Capitol Mfg. Co.; Div. of Harsco Corp.
- c. Eclipse, Inc.
- d. Epco Sales, Inc.
- e. Perfection Corp.
- f. Or approved equal

E. Pipe Sleeves: Provide pipe sleeves of one of the following:

1. Sheet-Metal: Fabricate from galvanized sheet metal; round tube closed with snaplock joint, welded spiral seams, or welded longitudinal joint. Fabricate from the following gauges: 3" and smaller, 20 gage; 4" to 6", 16 gage; over 6", 14 gage.
2. Steel-Pipe: Fabricate from Schedule 40 galvanized steel pipe; remove burrs.
3. Iron-Pipe: Fabricate from cast-iron or ductile-iron pipe; remove burrs.
4. Plastic-Pipe: Fabricate from Schedule 80 PVC plastic pipe; remove burrs.

F. Mechanical Sleeve Seals

1. Modular mechanical type consisting of interlocking synthetic rubber links shaped to continuously fill annular space between pipe and sleeve, connected with bolts and pressure plates which cause rubber sealing elements to expand when tightened, providing watertight seal and electrical insulation
2. Provide mechanical sleeve seals for sleeves located in foundation walls below grade, or in exterior walls.
3. Manufacturers:
 - a. Thunderline Corp.
 - b. Link Seal Type "C"
 - c. Metraflex Co.
 - d. MetraSeal.
 - e. or approved equal.



2.7 HANGERS AND SUPPORTS

A. General

1. Insulated Piping: Each pipe hanger supporting insulated piping shall be provided with a pipe covering protection shield.
2. Hangers for pipes smaller than 5" shall be forged or malleable iron ring type or steel clevis type supported by a solid steel rod.
3. Sockets used on upper ends of rods at beam clamps and on lower ends of rods for single hangers shall be malleable or forged steel with standard machine threads.
4. Supports for vertical piping shall be double bolt riser clamps, Grinnell MSS SP 69 Type 8 with each end having equal bearing on the building structure located as hereinafter specified. If piping is insulated, riser clamp shall be placed under insulation.
5. Trapeze type hangers shall be made of 2"x2"x1/4" carbon steel angle iron with drilled holes and 1/2" hanger rods. In lieu of an angle iron, a strut assembly may also be used for the trapeze style hanger supports.

B. Pipe hangers shall be manufactured by:

- a. Anvil International Inc. (Formerly Grinnell)
- b. Cooper B-Line, Inc.
- c. Carpenter & Paterson, Inc.
- d. F. & S. Central Mfg. Co.
- e. Grabler Mfg. Co.

2.08 INSERTS AND EXPANSION BOLTS

- A. Expansion bolts for use in new and existing reinforced concrete slabs: shall be wedge-type zinc-coated or stainless steel fastener with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used: Powers Fasteners, "Power Stud"; ITW Ramset/Red Head "Trubolt"; Hilti, Inc "Kwik Bolt" or approved equal.

2.09 SADDLES AND SHIELDS



- A. Except as otherwise indicated on the Drawings, provide saddles or shields under piping hangers and supports, factory-fabricated, for all insulated piping. Size saddles and shields for exact fit to mate with pipe insulation.
1. Protection Saddles: MSS Type 39; fill interior voids with segments of insulation matching adjoining insulation.
 2. Protection Shields: MSS Type 40; of length recommended by the manufacturer to prevent crushing of insulation.
 3. Thermal Hanger Shields: Constructed of 360° insert of high density, 100 psi, waterproofed calcium silicate, encased in 360° sheet metal shield. Provide assembly of same thickness as adjoining insulation.
- B. Manufacturers:
- a. Elcen Metal Products Co.
 - b. Pipe Shields, Inc.
 - c. Value Engineered Products, Inc.
 - d. Or approved equal

PART 3 - EXECUTION

3.01 INSPECTION

- A. Examine areas and conditions under which all products are to be installed. Do not proceed with work until unsatisfactory conditions have been corrected in manner acceptable to the City of New York.

3.02 PREPARATION

- A. Proceed with installation of hangers, supports and anchors only after required building structural work has been completed. Correct inadequacies including (but not limited to) proper placement of inserts, anchors and other building structural attachments.

3.03 PIPE INSTALLATION

- A. Install pipes in accordance with recognized industry practices, which will achieve permanently-leakproof piping systems, capable of performing each indicated service without piping failure. Align piping accurately



at connections, within 1/16" misalignment tolerance. Comply with ANSI B31 Code for Pressure Piping.

- B. Locate piping runs, except as otherwise indicated, vertically and horizontally (pitched to drain) and avoid diagonal runs wherever possible. Orient horizontal runs parallel with walls and column lines. Locate runs as shown or described by diagrams, details and notations. Run piping in shortest route which does not obstruct usable space or block access for servicing building and its equipment. Hold piping close to walls, overhead construction, columns and other structural and permanent-enclosure elements of building; limit clearance to 1/2" where furring is shown for enclosure or concealment of piping, but allow for insulation thickness, if any. Where possible, locate insulated piping for 1" clearance outside insulation.
- C. Do not run piping through transformer vaults and other electrical or electronic equipment spaces and enclosures unless unavoidable. Install drip pan under piping that must be run through electrical spaces. Do not run piping in stairwells or elevator equipment rooms except for systems serving those spaces.
- D. In the outlet from each cooling coil condensate drain pan, provide a tee with a brass plug at one end to facilitate cleaning of drain.

3.04 INSTALLATION OF PIPE SYSTEM JOINTS

- A. Provide joint of type indicated in each piping system.
- B. Thread pipe in accordance with ASME B1.20.1; cut threads full and clean using sharp dies. Ream threaded ends to remove burrs and restore full inside diameter. Apply pipe joint compound, or pipe joint tape (Teflon*) where recommended by pipe/fitting manufacturer, on male threads at each joint and tighten joint to leave not more than three threads exposed.
- C. Weld pipe joints in accordance with recognized industry practice and as follows:
 - 1. Weld pipe joints only when ambient temperature is above 0° F where possible.
 - 2. Bevel pipe ends at a 37.5° angle where possible, smooth rough cuts, and clean to remove slag, metal particles and dirt.



3. Use pipe clamps or tack-weld joints with 1" long welds, 4 welds for pipe sizes to 10", 8 welds for pipe sizes 12" to 20".
 4. Build up welds with stringer-bead pass, followed by hot pass, followed by cover or filler pass. Eliminate valleys at center and edges of each weld. Weld by procedures which will ensure elimination of unsound or unfused metal, cracks, oxidation, blow-holes and non-metallic inclusions.
 5. Do not weld-out piping system imperfections by tack-welding procedures; refabricate to comply with requirements.
- D. Brazed Joints: Joints in refrigerant piping shall be brazed. The outside of the copper tube and the inside of the fitting where solder will be applied, shall be cleaned and burnished with fine crocus cloth until all dirt and oxide is removed. A light coat of non-corrosive brazing flux shall be applied to both pipe and fittings (Acid flux shall not be used). Joint shall be uniformly heated to proper brazing temperature and the brazing material shall be fed to the joint until a uniform line of brazing material appears around the pipe at the end of the fitting. Brazing shall be done only by mechanics that are qualified for brazing refrigerant piping.
- E. Fittings for copper tubing for refrigerant use shall be wrought copper with solder type ends. Forged brass fittings are also acceptable for this purpose. Fittings shall be suitable for working water pressure up to 250 psi.
- F. Solder copper tube-and-fitting joints in accordance with recognized industry practice. Cut tube ends squarely, ream to full inside diameter, and clean outside of tube ends and inside of fittings. Apply solder flux to joint areas of both tubes and fittings. Insert tube full depth into fitting, and solder in manner that will draw solder full depth and circumference of joint. Wipe excess solder from joint before it hardens.
- G. The use of mechanical formed outlets on copper tubing instead of soldered joints is acceptable. The maximum diameter of branches shall be 2-1/8". Use appropriate tool designed for mechanical formed outlets on copper tubes. All mechanical formed tee fittings shall be brazed in accordance with the Copper Development Associations Copper Tube Handbook Using BCuP series filler metal. All mechanical formed branch collars shall be listed by UPC,



and Underwriters Laboratory. They shall comply with ASME Code for pressure piping ANSI B31.5c.

- H. Offsets in piping shall be accomplished by means of standard fittings.
- I. Eccentric Fittings: reductions in sizes of hot water mains shall be made with eccentric fittings.
- J. Reducing Fittings: except for welded piping, no fittings shall be taped for drip except in boss provided for that purpose. Reducing fittings shall be used where drips are required.
- K. Unions shall be used in piping only adjacent to units of equipment such as pumps, compressors, heating coils, cooling coils and all other items and accessories, or in other locations where specified, where shown on the Drawings, or where written permission is granted prior to installation.
- L. Mechanical Couplings Type Fittings: The use of mechanical coupling type fittings on hot and cold water piping in lieu of threaded or flanged fittings is acceptable in sizes 2" to 8" inclusive. The mechanical couplings shall be self-centering and shall engage and lock the grooved pipe and/or fittings in a positive couple while allowing for some degree of angular pipe deflection, contraction and expansion. Entire coupling installation including pipe grooving shall be performed in accordance with the manufacturer's instructions. Victaulic couplings together with their respective grooved end pipe fittings are acceptable..

3.05 INSTALLATION OF FLEXIBLE CONNECTIONS

- A. Install stainless steel type on the water line at the circulating pumps; and bronze type on the refrigerant line. Pipe system must be properly supported so as not to impose weight on the connectors which would compress the hose and relax the braid tension. Avoid torque. Do not twist the hose assembly during installation when aligning bolt holes in a flange or in mating-up the pipe threads.

3.06 PIPING TESTS

- A. For operational and hydrostatic tests, refer to Section 230593: Cleaning and Testing.



- B. Where piping installed under this project is connected to any existing system, such installed piping shall be isolated from the existing system during the performance of the required tests.

3.07 INSTALLATION OF PIPING SPECIALTIES

- A. Pipe Escutcheons: Install pipe escutcheons on each pipe penetration through floors, walls, partitions, and ceilings where penetration is exposed to view; and on exterior of building. Secure escutcheon to pipe or insulation so escutcheon covers penetration hole, and is flush with adjoining surface.
- B. Strainers
 - 1. Locate strainers in supply line ahead of the following equipment, and elsewhere as indicated, if integral strainer is not included in equipment:

Pumps
- C. Dielectric Unions: install at each piping joint between ferrous and non-ferrous piping. Comply with manufacturer's installation instructions.
- D. Pipe Sleeves
 - 1. Install pipe sleeves where piping passes through walls, floors, ceilings, and roofs. Do not install sleeves through structural members of work, except as detailed on the Drawings or as reviewed by the Commissioner. Install sleeves accurately centered on pipe runs. Size sleeves so that piping and insulation (if any) will have free movement in sleeve, including allowance for thermal expansion; but not less than 2 pipe sizes larger than piping run. Where insulation includes vapor-barrier jacket, provide sleeve with sufficient clearance for installation. Install length of sleeve equal to thickness of construction penetrated, and finish flush to surface; except floor sleeves. Extend floor sleeves 1/4" above level floor finish, and 3/4" above floor finish sloped to drain.
 - a. Install sheet-metal sleeves at interior partitions and ceilings other than suspended ceilings.
 - b. Install iron-pipe sleeves at exterior penetrations, both above and below grade.



- c. Install steel-pipe or plastic-pipe sleeves where indicated on the Drawings.
- E. Mechanical Sleeve Seals: Mechanical modular seals may be used in lieu of packing and sealant for sleeves and core drilled holes. Loosely assemble rubber links around pipe with bolts and pressure plates located under each bolt head and nut. Push into sleeve and center. Tighten bolts until links have expanded to form watertight seal. Use fire protective seals where required. Size annular space as required for seal installation.
- F. Fire Barrier Penetration Seals: refer to Section 078400: Firestopping.
- G. Drip Pans: locate drip pans under piping passing over or within 3 feet of electrical equipment, and elsewhere as indicated. Hang from structure with rods and building attachments, weld rods to side of drip pan. Brace to prevent sagging or swaying. Connect 1" drain line to drain connection, and run to nearest plumbing drain or elsewhere as indicated on Drawings.

3.08 INSTALLATION OF SUPPORTS AND ANCHORS

- A. Provide all necessary pipe hanger material needed to safely and securely support or hang all piping. Pipe hanger loads shall be determined by accurate weight balance calculations to prevent transferring loads and forces to any equipment and terminal connections.
- B. Install building attachments at required locations within concrete or on structural steel for proper piping support. Space attachments within maximum piping span length indicated in MSS SP-69 and MSS SP-89.
- C. Install hangers, supports, clamps and attachments to support piping properly from building structure. Arrange for grouping of parallel runs of horizontal piping to be supported together on trapeze type hangers where possible. Install supports with maximum spacings complying with MSS SP-69 and MSS SP-89. Where piping of various sizes is to be supported together by trapeze hangers, space hangers for smallest pipe size or install intermediate supports for smaller diameter pipe. Do not use wire or perforated metal to support piping, and do not support piping from other piping.
- D. Install hangers and supports complete with necessary inserts, bolts, rods, nuts, washers and all other items



and accessories. Except as otherwise indicated for exposed continuous pipe runs, install hangers and supports of same type and style as installed for adjacent similar piping.

- E. Prevent electrolysis in support of copper tubing by use of hangers and supports which are copper plated or by other recognized industry methods.
- F. Provisions for Movement
 - 1. Install hangers and supports to allow controlled movement of piping systems.
 - 2. Load Distribution: Install hangers and supports so that piping live and dead loading and stresses from movement will not be transmitted to connected equipment.
 - 3. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and so that maximum pipe deflections allowed by ANSI B31 Pressure Piping Codes are not exceeded.
- G. Insulated Piping: Comply with the following installation requirements.
 - 1. Clamps: Attach clamps, including spacers (if any), to piping with clamps projecting through insulation; do not exceed pipe stresses allowed by ANSI B31.
 - 2. Shields: Where low-compressive-strength insulation or vapor barriers are indicated on chilled water piping, install coated protective shields.
 - 3. Saddles: Where insulation without vapor barrier is indicated, install protection saddles.
- H. Install anchors at proper locations to prevent stresses from exceeding those permitted by ANSI B31 and to prevent transfer of loading and stresses to connected equipment.
- I. Fabricate and install anchor by welding steel shapes plates and bars to piping and to structure. Comply with AWS standards.
- J. The refrigerant piping above the roof slab shall be supported in a galvanized sheet steel enclosure. The cover of the enclosure shall be held in place with stainless steel sheet metal screws on 18" centers. The



base of the enclosure shall be secured to the angle uprights with 1/4" bolts, washers and nuts.

- K. Hangers and supports for refrigerant piping shall be copper plated, malleable iron or carbon steel.

3.09 CLEANING, FLUSHING, INSPECTING

- A. Clean exterior surfaces of superfluous materials, and prepare for application of specified coatings (if any). Flush out piping systems with clean water before proceeding with required tests. Inspect each run of each system for completion of joints, supports and accessory items. Inspect pressure piping in accordance with procedures of ASME B31.
- B. Hanger Adjustments: adjust hangers so as to distribute loads equally on attachments.
- C. Support Adjustment: provide grout under supports so as to bring piping and equipment to proper level and elevations.

3.10 PIPE AND FITTING SCHEDULE

- A. Cold Water Above Ground (CW) 125 psig and Less:
 - 1. Type "L" Copper tubing with soldered fittings.
- B. Hot Water Supply and Return (HWS and HWR) 125 psig and less:
 - 1. 2" and Less: Type L hard temper copper tubing with bronze or copper solder fittings. Mechanically formed tee fittings may be used in lieu of solder-joint tee fittings.
 - 2. 2-1/2" and 3": Standard Weight Black Steel pipe with Screwed End Standard Weight Cast-Iron fittings
3" and Up: Standard Weight Black Steel pipe, with Weld End Standard Weight Steel fittings or Grooved End with Grooved End fittings.
- C. Refrigerants (RS, RL, RG and RD: Type L hard temper copper tubing with brazed fittings.
- D. Condensate Drain Piping: all drip piping from air handling units; all drains and overflow lines from heating and air conditioning systems, and all condensate piping systems connected to drain pans - All Sizes:



Standard weight (Schedule 40) galvanized steel pipe;
minimum size 1" or Type L hard temper copper tubing and
fittings.

END OF SECTION 230503



SECTION 230523
VALVES (HVAC)

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide labor, materials, equipment, accessories, services and test necessary to complete and make ready for operation, all valves shown on the Drawings and hereinafter specified in other Division-23 Sections (HVAC).

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Submit manufacturer's product data including valve design, pressure and temperature classification, end connection details, seating materials, trim material and arrangement, required clearances and installation instructions.
- B. Shop Drawings: Submit valve schedule showing manufacturer's figure number, location, and valve features for each required valve. Include list indicating valve and its application in the schedule.
- C. Maintenance data.
- D. Maintenance Material:
 - 1. Deliver extra wrenches to the Commissioner.
 - 2. Padlock and two (2) keys for each lock.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards
 - 1. MSS Compliance: Mark valves in accordance with MSS-25: Standard Marking System for valves, fittings, flanges and unions and all other applicable MSS Standards.
 - 2. ANSI Compliance: For face-to-face and end-to-end dimensions.



3. UL and FM Compliance: Provide valves used in fire protection piping which are UL-listed and FM approved.
4. ASME Compliance: Comply with ASME B31.9 for building services piping and ASME B31.1 for power piping.
5. Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

B. Valves of one type throughout the Project shall be of the same manufacturer. Valve parts of same manufacturer, size and type shall be interchangeable.

PART 2 - PRODUCTS

2.01 GENERAL

A. Provide all the valves shown on the Drawings (HVAC Work) and necessary for the control and easy maintenance of all piping and equipment. Valves shall be first quality, have proper clearance, followers in the packing glands, and shall seal tight at the specified test pressure. Each valve shall have the maker's name or brand, the figure or list number and the guaranteed working pressure cast on the body and cast or stamped on the bonnet.

1. Working Pressure: Valves shall be designed for steam working pressure of not less than 125 psi, for water of not less than 200 psi and 350 psig hydrostatic tests.
2. Wheels: Shut-off valves shall have self-cooling type metal hand wheels except where specified otherwise. For valves other than outside screw and yoke type gate valves, the valve stem shall be



extended through the wheel and be provided with hexagon nuts to secure the wheel in place.

- B. All valves shall be designed for packing under pressure with valve open or closed.
- C. Valves 2" and under shall be all bronze, unless otherwise specified or shown on the Drawings. Valves 2 1/2" and larger shall be iron body bronze mounted (IBBM), iron body brass mounted, or iron body with outside screw and yoke (OS&Y) unless space conditions prevent the use of OS&Y valves, in which case non-rising stem valves may be used.
- D. Solder end valves shall be suitable for brazing.
- E. All valves up to 2" in diameter shall have threaded or solder ends, 2 1/2" in diameter and over shall have flanged, or butt-welded unless otherwise specified or shown on the Drawings.

2.02 MATERIALS

A. Body

- 1. Cast Iron: ASTM A126, Class B, higher strength cast iron.
- 2. Bronze: For use up to 150 psig WSP, ASTM B62 and over 150 psig to 300 psig WSP, ASTM B61.
- 3. Cast Steel: ASTM A216 Grade WCB.
- 4. Forged Steel: ASTM A105.

B. Stem

- 1. Cast Manganese Bronze: ASTM B584.
- 2. Cast Silicon Brass: ASTM B584.
- 3. Rolled Silicon Brass: ASTM B98 Alloy D.
- 4. Rolled Aluminum Bronze: ASTM B150 Alloy 1.
- 5. Rolled Manganese Bronze: ASTM B138 Alloy A (half hard).
- 6. Naval Brass: ASTM B21 Alloy A or Alloy C (hard).
- 7. Carbon Steel: As specified for particular type of valve.
- 8. Stainless Steel: As specified for particular type of valve.

C. Trim: As specified for particular type of valve.

2.03 GATE VALVES



- A. All gate valves shall be of the solid wedge disk type.
- B. Gauge Valves: Use gate valves, cocks are not acceptable.
- C. Hose gate valves shall be 125 psi, 3/4", standard weight bronze with cap.
- D. Manufacturers
 - a. Crane Co.
 - b. Hammond Valve Corp.
 - c. NIBCO, Inc.
 - d. Stockham Valves & Fittings
 - e. Milwaukee Valve Company
 - f. Lunkenheimer-Energovalves, Inc.
 - g. Walworth Mfg. Co.
 - h. Smith-Cooper International
 - i. Or approval equal

2.04 GLOBE VALVES

- A. Except valves in pneumatic and automatic temperature control piping and pneumatic and automatic valves, no globe valve of size larger than 1/2" shall be used, unless otherwise specified or shown on the Drawings. Where globe valves are approved, they shall be of the same grade called for other valves.

2.05 CHECK VALVES

- A. Check valves shall be of heavy pattern, straightway, re-grinding type with renewable seat, ground seat and approved type renewable discs. The discs for check valves, of size larger than 2" may be bronze faced.
- B. Swing Check Valves: horizontal swing, Y-pattern, cast-bronze body and cap, bronze disc with rubber seat or composition seat, threaded or soldered end connections or cast-iron body and bolted cap, horizontal-swing bronze disc, flanged or grooved end connections. Face discs for cold water service can be Buna-N or Teflon.
- C. Silent Check Valves: cast-iron body, bronze trim, stainless steel spring and flanged end connections.
- D. Lift check valves shall be globe style, streamline, spring loaded.
- E. Manufacturers
 - a. Crane Co.
 - b. Hammond Valve Corp.



- c. Mueller Steam Specialty
- d. NIBCO, Inc.
- e. Stockham Valves & Fittings.
- f. Victaulic Co. of America
- g. Milwaukee Valve Company
- h. Walworth Mfg. Co.
- i. Or approval equal

2.06 COCKS

- A. Cocks, where specified or shown on the Drawings shall be for not less than 150 psi working pressure. Asbestos packed cocks will not be approved.

2.07 PLUG VALVES

- A. Lubricated Plug Valves shall be of the lubricated tapered plug type, with cast iron body. Plugs shall be Teflon coated and fitted with an "O" ring packing.
- B. Tapered plugs shall be faced with a thermally bonded anti-friction material. Valves shall have "Sealed Port" lubrication system allowing complete lubrication of valve while in service, under line pressure, installed in any position.

2.08 BALL VALVES

- A. Ball valves shall be two-piece full ported 600 W.O.G. bronze body, solid blow-out proof stem, teflon seats, chrome plated bronze or brass ball and Teflon seals, corrosion resistant steel lever handles with vinyl grips, balancing stop with screw or solder ends. Screw end ball valve shall be Apollo 70-100, Conbraco Industries, Inc., Milwaukee BA-100, Hammond 8501, NIBCO T-585-70, Stockham S-206 BR-R-T, Smith-Cooper 172 8155 or approved equal, and solder end ball valve shall be Apollo 70-200, of Conbraco Industries, Inc., Milwaukee BA-150, Hammond 8511, NIBCO T-585-70, Stockham S-206 BR-R-S, Smith-Cooper 172 8156 or approved equal. Ball valves should be used for up to 2" sizes only.

2.09 VALVES FOR REFRIGERANTS SERVICE

- A. Valves shall have forged brass or bronze bodies conforming to ASME B31.5 Code for Refrigerant Piping.
 - 1. Valves with sweat or flare connections, in sizes up to and including 5/8" OD shall be of packless



metal diaphragm type and 3/4" OD larger, for use in hard temper tubing with sweat connections shall be of packed type with wing cap. Packed valves shall be backseating to permit repacking under pressure and the wing cap shall have a socket formed in top, so that it may be inverted and used to turn stem.

2. Check valves: Spring loaded type with bronze body, bronze disc, neoprene or Teflon seat, bronze bonnet with stainless steel spring.

B. Manufacturers

- a. Alco Control Division
- b. Henry Valve Co.
- c. Sporlan Valve Co.
- d. Or approved equal

2.10 FORGED OR CAST STEEL VALVES

A. Gate Valves:

1. Class 800, forged steel body and bonnet, wedge, stem and seat ring: stainless steel; bonnet gasket: spiral wound stainless steel with 316 spiral wound graphite packing ring; hand wheel: malleable iron or steel, bolted bonnet, OS&Y, solid wedge, threaded or socket welded ends.
2. Class 300, cast steel body, bolted bonnet, OS&Y, solid wedge; seat rings: copper nickel alloy or monel; wedge: steel with stainless steel face hardened; handwheel: steel or malleable iron, flanged or welding ends.

B. Check Valves.

1. Horizontal swing check, cast steel body and bolted cap, Class 300. Disc shall be heavy one piece construction, suspended on a detachable hinge with detachable hinge pin. Body and cap: cast steel; seat ring: Stainless steel; disc: stainless steel and renewable; hinge pin: stainless steel and renewable, gasket: soft corrugated iron.
2. Lift check, forged steel body and bolted or union type cap, Class 600. Body and cap: forged steel; seat ring: stainless steel; disc: stainless and renewable, gasket: spiral wound stainless steel with 316 spiral wound graphite.
3. Silent check, cast steel body, stainless steel trim and spring, Class 300, flanged ends.



4. Piston Check: Class 800 forged steel body, stainless steel piston disc and trim, bolted cap, non-asbestos gasket, threaded or socket welded ends.

C. Manufacturers

- a. R-P&C Valve/Bonney Forge Corporation
- b. Newco Valves
- c. Vogt Valves
- d. Or approved equal.

2.11 VALVE OPERATORS

- A. Provide suitable handwheel for gates, globes or angles, and drain valves.
- B. Provide one plug valve wrench for every ten plug valves sized 2" and smaller, minimum of one. Provide each plug valve sized 2-1/2" and larger with a wrench, with set screw.
- C. Provide valves located more than 7' from floor in equipment room areas with chain operated sheaves. Extend chains to about 5' above floor and hook to clips arranged to clear walking aisles. Provide extended valve shafts, 4" min to keep chain away from pipe insulation.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Except as otherwise indicated, comply with the following requirements:
 1. Install valves where required for proper operation of piping and equipment including valves in branch lines where necessary to isolate sections of piping. Locate valves so as to be accessible and so that separate support can be provided when necessary.
 2. Install valves with stems pointed up, in vertical position where possible, but in no case with stems pointed downward from horizontal plane unless unavoidable. Nonrising stem valves shall be used only where headroom prevents full extension of rising stems. Install valve drains with hose-end adapter for each valve that must be installed with stem below horizontal plane.
 3. Install gate valves for shut-off; to isolate equipment, parts of systems, and vertical risers and any banked system of coils and to separate each coil.



4. Hose gate valves: Provide hose gate valves to drain the pipe at the low points of the system.
 5. Install globe for throttling service and control device.
 6. Use tapered lubricated plug valves in water systems for throttling service and at the discharge of all pumps. Use nonlubricated plug valves only when shut-off or isolating valves are also provided.
 7. Provide tapered lubricated 1" drain gate valves at main shut-off valves, and at all low points of piping and apparatus.
 8. Provide 1" gate vent valves at all high points in the piping system.
- B. Insulation: Where insulation is indicated, install extended-stem valves, arranged in proper manner to receive insulation.
- C. Mechanical Actuators: Install mechanical actuators with chain operators where indicated on the Drawings. Extend chains to about 5'6" on the floor and hook to clips to clear aisle passage.

3.02 ADJUSTING AND CLEANING

- A. Valve Adjustment: After piping systems have been tested and put into service, but before final testing, adjusting, and balancing, inspect each valve for possible leaks. Adjust or replace packing to stop leaks, replace valve if leak persists.
- B. Cleaning: Clean factory-finished surfaces. Repair any marred or scratched surfaces with manufacturer's touch-up paint.

3.03 MINIMUM VALVE REQUIREMENTS (MC 1205)

- A. Shutoff valves shall be installed on the supply and return side of all heat exchangers.
- B. Shutoff valves shall be installed on the building supply and return of central utility systems and district heating and cooling systems.
- C. Shutoff valves shall be installed on the connection to any pressure vessel.
- D. Shutoff valves shall be installed on both sides of a pressure-reducing valve.



- E. Shutoff valves shall be installed on connections to mechanical equipment and appliances. This requirement does not apply to components of a hydronic system such as pumps, air separators, metering devices and similar equipment.

3.04 VALVES SCHEDULES APPLICATION

A. Cold Water in Buildings

1. 2-1/2" and Less: Solder end; Class 125, bronze body gates; and swing checks.

B. Hot and Dual Water Temperature

1. 4" and Less: solder ends; Class 125, bronze body gates, swing checks. Grooved copper ends 2" and up.
2. 5" and Up: Flanged ends; Class 125, OS&Y iron body gates; and bolted cover, renewable disc checks.

3.05 VALVE SCHEDULES

A. Gate valves - 2-1/2 inch and Less:

1. Class 125:

Manufacturer	Threaded	Threaded	Solder	Solder
	NRS	RS	NRS	RS
Crane	438	428	1701S	1700S
Hammond	IB645	IB640	IB647	IB635
Nibco	T113	T111	S113	S111
Stockham	B-103	B-100	B-104	B-108
Milwaukee	105	148	115	1149
Lukenheimer	2129	2127	2133	2132
Walworth	4	55	4SJ	55SJ
Smith-Cooper	171 4101	N/A	171 4102	N/A

Or approved equal

B. Gate valves - 3 inch and Up

1. Class 125:

Manufacturer	OS&Y RS	NRS
Crane	465-1/2	461
Hammond	IR1140	IR1138
Nibco	F-617-0	F-619
Stockham	G-623	G-612
Milwaukee	F-2885M	F-2882M
Lukenheimer	1430	1428
Walworth	8726F	8719F



Or approved equal

C. Swing Check valves - 2-1/2 inch and Less:

	Class 125 Threaded Ends	Class 125 Solder Ends	Class 150 Threaded Ends
Crane	37	1340	141TF
Hammond	IB904	IB912	IB946
Nibco	T-413B	S-413B	T-433Y
Stockham	B-319Y	B-309Y	B-321
Milwaukee	509	1509	510T
Lukenheimer	2144	2145	230-70
Walworth	3406	3406SJ	3412

Or approved equal

Class 300: Manufacturer	Threaded
Crane	76E
Hammond	IB949
Nibco	T-473-B
Stockham	B-375
Milwaukee	517/507
Lukenheimer	554-Y
Walworth	3428

Or approved equal

D. Swing Check valves - 3 inch and Up

Manufacturer	Class 125
Crane	373
Hammond	IR1124
Nibco	F-918
Stockham	G-931
Milwaukee	F-2974M
Lukenheimer	1790 IBBM
Walworth	8928F

Or approved equal

END OF SECTION 230523



SECTION 230549
VIBRATION ISOLATION

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide a complete system of vibration isolation for each item of HVAC and Electrical equipment and apparatus as specified herein, as shown on the Drawings and as needed for a complete and proper installation.

1.02 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Submit Manufacturer's Product Data for the vibration isolating supports required for each item of HVAC and Electrical equipment.
 - 1. Submit schedule showing manufacturers' mounting sizes and guarantee deflections.
- B. Shop Drawings: Submit Shop Drawings for the vibration isolating supports required for each item of HVAC and Electrical equipment, showing details of intermediate structural steel members and method of attachment required for installation of vibration isolating devices.
- C. Manufacturer's certification as specified in the Supplemental Quality Assurance Article.
- D. Maintenance data.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Manufacturer's Regulating Requirements: Contractors shall determine vibration isolation sizes and locations per the criteria defined in Article 3.02.C.



- B. Per MC 301.10: Where vibration isolation of equipment and appliances is employed, supplemental restraint shall be used to accomplish the support and restraint.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

A. Approved manufacturers:

- a. Mason Industries, Inc.
- b. Vibration Eliminator Co.
- c. Vibration Mountings & Controls Inc.
- d. Korfund Dynamics Co.
- e. Or approved equal.

2.02 MATERIALS

A. Spring Mounts

1. **Housed Spring Mounts:** Spring type mounts shall consist of cast telescoping housings containing one or more steel springs. The mount shall be provided with built-in leveling bolt(s), resilient inserts of neoprene to act as guides for upper and lower housings and with ribbed neoprene acoustical pads bonded to the bottom of the lower housing. The lower housing shall have slotted holes in the base, to permit fastening of the mount to the floor.
2. **Free standing spring mounts** shall be laterally stable without housing. Each mount shall be provided with a leveling bolt, a ribbed neoprene pad on the underside of the base, and means of securing the spring base to the floor when specified. Free standing spring mounts shall be used where a floating pad system or an inertia block is specified.

- B. **Neoprene-in-Shear Mounts:** Each neoprene-in-shear type mount shall consist of a steel top plate and steel base plate completely enclosed in oil resistant neoprene. Top plate shall have a threaded bolt hole for attachment of equipment to mount. Base plate shall have bolt holes, to permit fastening of the mount to the floor when specified. Underside of base plate shall have ribbed, neoprene construction. Single neoprene-in-shear mounts shall have a maximum deflection of 0.25". Double neoprene-in-shear mounts shall have a maximum deflection of 0.50".



- C. Hanger Type Isolators: Hanger type isolators shall consist of a steel housing incorporating a single or double neoprene-in-shear element or a steel spring, or a combination of these two isolators, as needed to achieve the required static deflection. Provide threaded rods for attachment of hanger to overhead structure and to equipment.

PART 3 - EXECUTION

3.01 PREPARATION

- A. For vibration isolation equipment installed indoors, all metal parts, including rails and bases, shall be painted at the factory with one coat of primer paint and one coat of aluminum paint. Other means or rust resisting painting may be accepted, subject to prior approval.
- B. Vibration isolation equipment installed outdoors shall have all steel parts hot dipped galvanized, all bolts cadmium plated, and all springs cadmium plated and neoprene coated.
- C. Vibration isolation equipment installed outdoors shall be designed and installed to resist wind loads in accordance with the NYC Building Code.

3.02 SUPPLEMENTAL INSTALLATION

- A. At each equipment location, provide the required deflection under the imposed load to produce uniform loading and deflection even when equipment weight is not evenly distributed. Isolators shall be suitable for the lowest operating speed of the equipment.
- B. Where the floor is waterproofed or finished with waterproof cement, install vibration isolation in such manner that the waterproofing is not damaged.
- C. Isolation equipment shall be in accordance with the following table:

Lowest RPM	Inches Deflection (Min.)	% Efficiency	Type
1750 & over	.25	95	Single neoprene-in-shear
1200-1749	.50	95	Double neoprene-in-shear
1000-1199	.75	95	Spring



570-999	1.25	90-95	Spring
520-569	1.5	90	Spring
330-519	2.0	80-90	Spring
Up to 329	3.5	80	Spring

- D. Install combination spring and double deflection neoprene position hangers on all refrigeration piping located in the Equipment Room.
- E. Install combination spring and double deflection neoprene position hangers on the suction and discharge piping at each circulating pump. Each hanger shall be located on the pump side of the flexible hose connection.
- F. Cooling towers, evaporative condensers, fluid coolers and air cooled condensers located on a roof or floor above grade shall be installed on vibration isolators providing a minimum isolation efficiency of 85 percent at fan motor RPM with a maximum static deflection of 4 inches and shall incorporate a leveling device and resilient pad having a minimum thickness of $\frac{1}{4}$ inch. Refer to MC 908.4.
- G. Per MC 926.2.3: Equipment piping shall be installed as follows:
1. Metal piping connected to power driven equipment shall be resiliently supported from or on the building structure for a distance of 50 pipe diameters from the power driven equipment. The resilient isolators shall have a minimum static deflection of 1 inch for all piping with a 4 inch or larger in actual outside diameter and $\frac{1}{2}$ inch for piping with less than 4 inches in actual outside diameter.
Piping connected to fluid pressure-reducing valves shall be resiliently isolated for a distance of 50 pipe diameters from pressure reducing valves and isolators shall provide a minimum static deflection of $\frac{1}{2}$ inch.
 2. Equipment such as heat exchangers, absorption refrigeration machines, or similar equipment, that are located on any floor or roof other than a floor on grade, and that are not power driven but are connected by metal piping to power driven equipment, shall be resiliently supported from or on the building structure, for a distance of 50 pipe diameters from the power driven equipment. The resilient supports shall be vibration isolators having a minimum static deflection of 1 inch and



shall incorporate approved resilient pads having a minimum thickness of 1/4 inch.

- H. Per MC 926.2.4: All fan equipment located on any roof or floor other than a floor on grade shall be mounted on or from vibration isolators. Fan equipment with motor drives separated from the fan equipment shall be supported on an isolated integral rigid structural base supporting both the fan and motor. Fan equipment with motor drives supported from the fan equipment shall be mounted directly on vibration isolators. Each isolator shall have provision for leveling. Isolators shall incorporate resilient pads having a minimum thickness of 1/4 inch. The vibration isolators shall provide a minimum isolation efficiency of 90 percent at fan rotor rpm with a maximum deflection of 2 inches. Fans and compressors of 3 horsepower (2.25 kW) or less assembled in unitary containers may meet this requirement with isolators internal to the container providing the isolators meet the above minimum isolator efficiencies.
- I. Per MC 926.2.5: All pumps of 3 horsepower (2.25 kW) or more located on any floor other than a floor on grade shall be supported on vibration isolators having a minimum isolation efficiency of 85 percent at the lowest disturbing frequency. Each isolator shall incorporate a leveling device and a resilient pad having a minimum thickness of 1/4 inch.
- J. Per MC 926.2.6: Compressors and drives located on a floor other than a floor on grade shall be mounted on vibration isolators having a minimum isolation efficiency of 85 percent at the lowest disturbing frequency. Each isolator shall incorporate a leveling device and a resilient pad having a minimum thickness of 1/4 inch.
- K. Per MC 926.2.9: Duct Connections to Fan Equipment: Flexible connections shall be installed between the fan equipment and connecting ductwork.

END OF SECTION 230549



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 230553
HVAC IDENTIFICATION

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

A. Provide all the mechanical (HVAC) identification work shown in the Drawing Schedules, specified in other Division-23 Sections and needed for a complete and proper installation. The types of identification devices specified in this Section include the following:

1. Painted Identification Materials
2. Plastic Pipe Markers
3. Valve Tags
4. Valve Schedule Frames
5. Plastic Equipment Markers
6. Plasticized Tags

1.02 RELATED SECTIONS

A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Shop Drawings: Provide list of identification wording, symbols, letter size, and color coding.
- B. Schedules: Submit valve schedule for each piping system, typewritten and reproduced on 8-1/2" x 11" bond paper. Include valve number, piping system, system abbreviation (as shown on tag), location of valve (room or space), and variations for identification (if any). Mark valves that are intended for emergency shut-off and similar special uses by special "flags" in margin of schedule.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

A. Codes and Standards



1. ANSI Standards: Comply with ANSI A13.1 for lettering size, length of color field, colors, and viewing angles.

PART 2 - PRODUCTS

2.01 MATERIALS AND MANUFACTURERS

- A. Provide manufacturer's standard products of categories and types required for each application as referenced in other Division-23 Sections (HVAC), shown on the Drawings and/or Schedules. Where more than single type is specified for application, selection is the Commissioner's option, but provide single selection for each product category.
- B. Painted Identification Materials:
 1. Stencils: fiberboard stencils, prepared for required applications with letter sizes generally complying with recommendations of ANSI A13.1.
 - a. Stencil Paint: exterior type stenciling enamel except as otherwise indicated on the Drawings; either brushing grade or pressurized spray-can form and grade.
 - b. Identification Paint: enamel of colors indicated or, if not otherwise indicated for piping systems, comply with ANSI A13.1 for colors or as selected by the Commissioner.
- C. Plastic Pipe Markers:
 1. Snap-On Type: Pre-printed, semi-rigid snap-on, color-coded pipe markers, complying with ANSI A13.1 or as selected by the Commissioner.
 2. Provide 1" thick molded fiberglass insulation with jacket for the plastic pipe marker to be installed on uninsulated pipes subjected to fluid temperatures of 125° F or greater. Cut length to extend 2" beyond each end of plastic pipe marker.
 3. Small Pipes: For external diameters less than 6" (including insulation if any), provide full-band pipe markers, extending 360° around pipe, fastened by snap-on application of pre-tensioned semi-rigid plastic pipe marker.



4. Large Pipes: For external diameters of 6" and larger (including insulation if any), provide either full-band or strip-type pipe markers, but not narrower than 3 times letter height, fastened by strapped-to-pipe (or insulation) application of semi-rigid type, with stainless steel bands.
5. Lettering: Pre-printed nomenclature which best describes piping system in each instance, as shown on the Drawings or as selected by the Commissioner in cases of variance with name shown or specified.
 - a. Arrows: Print each pipe marker with arrows indicating direction of flow, either integrally with piping system service lettering (to accommodate both directions), or as separate unit of plastic.

D. Valve Tags

1. Brass Valve Tags: 19-gage polished brass valve tags with stamp-engraved piping system abbreviation in 1/4" high letters and sequenced valve numbers 1/2" high, and with 5/32" hole for fastener.
 - a. Provide 2" sq tags
 - b. Numbers and letters shall be block type, indented and filled with durable black compound.
2. Valve Tag Fasteners: solid brass chain (wire link or beaded type), or solid brass S-hooks of the size required for proper attachment of tags to valves, and manufactured specifically for that purpose.

E. Valve Schedule Frames: For each page of valve schedule, provide safety glass in wood or aluminum self-closing frame, with screws for mounting on masonry walls.

F. Plastic Equipment Markers:

1. Laminated plastic, color coded equipment markers. Conform to the following color code if not specified otherwise:
 - a. Green: Cooling equipment and components.
 - b. Yellow: Heating equipment and components.
 - c. Yellow/Green: Combination cooling and heating equipment and components.



- d. Brown: Energy reclamation equipment and components.
 - e. Blue: Equipment and components that do not meet any of the above criteria.
- For hazardous equipment, use colors and designs recommended by ANSI A13.1.
2. Nomenclature: Include the following matching terminology on schedules and Drawings as closely as possible:
 - a. Name and plan number
 - b. Equipment service
 - c. Design capacity
 - d. Other design parameters such as pressure drop, entering and leaving conditions, rpm, and all other items and accessories
 3. Size: approximate 2-1/2" x 4" markers for control devices, dampers and valves; and 4-1/2" x 6" for equipment.
- G. Plasticized Tags: Pre-printed or partially pre-printed accident-prevention tags, of plasticized card stock with matt finish suitable for writing, approximately 3-1/4" x 5-5/8", with brass grommets and wire fasteners, and with appropriate pre-printed wording including large-size primary wording (as examples: DANGER, CAUTION, DO NOT OPERATE).
- H. Lettering and Graphics:
1. Coordinate names, abbreviations and other designations used in the identification work with corresponding designations shown on the Drawings or Schedules, or specified. Provide numbers, lettering and wording as indicated or, if not otherwise indicated, as recommended by manufacturers or as required for proper identification and operation/maintenance of systems and equipment.
- I. Approved Manufacturers
1. Allen Systems, Inc.
 2. Brady (W.H.) Co.; Signmark Div.
 3. Industrial Safety Supply Co., Inc.
 4. Seton Name Plate Corp.
 5. Or approved equal.



PART 3 - EXECUTION

3.01 INSTALLATION

- A. Coordination: Where identification is to be applied to surfaces that require insulation, painting or other covering or finish, including valve tags in finished mechanical spaces, install identification after completion of covering and painting. Install identification prior to installation of acoustical ceilings and similar removable concealment.
- B. Piping System Identification: Install pipe markers and color bands and include arrows to show direction wherever piping is exposed to view in occupied spaces, machine rooms, accessible maintenance spaces (shafts, tunnels, plenums) and exterior non-concealed locations.
- 1.. Near each valve and control device
 2. Near each branch, excluding short take-offs for terminal units; mark each pipe at branch, where there could be question of flow pattern.
 3. Near locations where pipes pass through walls or floors/ceilings, or enter non-accessible enclosures.
 4. Near major equipment items and other points of origination and termination.
 5. Spaced intermediately at maximum spacing of 50' along each piping run, except reduce spacing to 25' in congested areas of piping and equipment.
 6. On piping above removable acoustical ceilings except omit intermediately spaced markers.
- C. Valve Identification:
1. Provide valve tag on every valve, cock and control device in each piping system; exclude check valves, valves within factory-fabricated equipment units, and shut-off valves at HVAC terminal devices and similar rough-in connections of units. List each tagged valve in valve schedule for each piping system.
 - a. Tagging Schedule: Comply with requirements of "Valve Tagging Schedule" at end of the Section.



2. Mount valve schedule on frames located in machine rooms where indicated or, if not otherwise indicated, where directed by the Commissioner.
- D. A permanent factory-applied name-plate(s) shall be affixed to appliances (reference MC 301.6) on which shall appear in legible lettering, the manufacturer's name or trademark, the model number, serial number and the seal or mark of the approved agency. A label shall also include the following:
1. Electrical equipment and appliances: Electrical rating in volts, amperes and motor phase; identification of individual electrical components in volts, amperes or watts, motor phase; Btu/h output; and required clearances.
 2. Fuel-burning units: Hourly rating in Btu/h; type of fuel approved for use with the appliances; and required clearances.
- E. Mechanical Equipment Identification:
- 1a. Install plastic equipment marker near each major item of mechanical equipment and each operational device, as specified herein if not otherwise specified for each item or device in their respective sections. Provide signs for the following general categories of equipment and operational devices
 - a. Main control and operating valves, including safety devices
 - b. Meters, gauges, thermometers and similar units
 - c. Strainers, filters, humidifiers, water treatment systems, thermostatic traps and similar equipment
 - d. Primary balancing dampers, mixing boxes
 - 1b. Provide permanent factory-applied name-plate(s) for all appliances as defined in Article 3.01.D including but not limited to the following:
 - a. Fuel-burning units including boilers, furnaces and heaters units
 - b. Pumps, compressors, chillers, condenser and similar motor-driven units



- c. Converters, heat exchangers, coils, evaporators, heat recovery units and similar equipment
 - d. Fans, blowers and VAV terminals
 - e. Packaged HVAC central-station, zone-type units, heat pumps, air handling units, heating and ventilating units
 - f. Tanks and pressure vessels
2. Plastic equipment marker lettering Size: Minimum 1/4" high lettering for name of unit where viewing distance is less than 2', 1/2" high for distances up to 6', and proportionally larger lettering for greater distances. Provide secondary lettering 2/3 to 3/4 of size of principal lettering.
 3. Text of Signs: In addition to name of identified unit, provide lettering to distinguish between multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations.
 4. Optional Use of Plasticized Tags: At the Commissioner's option, where equipment to be identified is concealed above acoustical ceiling or similar concealment, plasticized tags shall be installed within concealed space to reduce amount of text in exposed sign (outside concealment).
 - a. Operational valves, dampers and similar minor items located in non-occupied spaces (including machine rooms) shall be identified by plasticized tags.

3.02 VALVE TAGGING SCHEDULES

- A. Numbers: Arrange the numbering of valves in the following manner:
 1. In First Story - No. 1000 to No. 1999.
 2. On Roof or in Roof Penthouse or Bulkhead-No. R1 to No. R999.
- B. In no case shall a number applying to one story, be assigned to a valve located in another story.
- C. For other information, refer to the Drawings.



END OF SECTION 230553



SECTION 230593
CLEANING AND TESTING

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide Cleaning and Pressure/Operational Testing for the HVAC Work done on this Project.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: List of instruments to be used for each test. Include instrument calibration requirements as specified.
- B. Quality Control Submittals
 - 1. Submit Field Cleaning/Test Results For the Following:
 - a. Piping Pressure Tests
 - b. Low Pressure Hot Water Heating Boiler and Pressure Vessels: Hydrostatic Test and Relief Valve Test
 - c. Hot Water System: Cleaning and Operational Tests
 - d. Refrigeration Systems: Pressurization Tests, Dehydration Tests, and Operational Tests
 - e. Chimney and Breeching Pressure Smoke Test
 - B. Refrigerant: Submit the record of the weight in pounds of refrigerant charged into each system to the Commissioner.
 - C. Test Schedule and Procedures Plan: Submit time schedule and copy of the step-by-step testing procedures for each



system. Isolating valves and flanges, vent fittings and pressure gauges utilized during the testing shall be indicated on the submitted appropriate shop drawings.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

A. Regulatory Requirements

1. Perform testing of factory fabricated equipment in accordance with NYC Building Code and Mechanical Code
2. Perform field-testing of piping systems in accordance with all the NYC Building Code and Plumbing Code

1.05 PROJECT CONDITIONS

- A. Protection:** During Test Work, protect controls, gauges and accessories that are not designed to withstand test pressures. Do not utilize permanently installed gauges for field-testing of systems.

1.06 SEQUENCING AND SCHEDULING

- A.** Transmit written notification of proposed date and time of all tests to the Commissioner at least 5 days in advance of such tests.
- B.** Perform Cleaning and Testing Work in the presence of the Commissioner. Commissioner shall additionally witness the 120-hour Operational Tests (for systems other than Building Management Systems and Direct Digital Control Systems which need not be witnessed since monitored parameters will be trended).
- C.** Pressure test piping systems inside buildings, at the roughing-in stage of installation, before piping is enclosed by construction work and at other times as directed. Perform test operations in sections as required and directed, to progress the Work in a satisfactory manner and not delay the general construction of the building. Valve or cap-off sections of piping to be tested. Contractor can utilize valves required to be installed in the permanent piping systems, or temporary valves or caps as required to perform the Work. The contractor is responsible to provide all isolation valves/flanges required in order to perform the



pressure testing. Testing valves/flanges shall be indicated on the submitted shop drawings. Contractor shall also provide all vents required to vent the air out of the piping prior to performing a hydrostatic test. Fittings for pressure gauges shall be located at the top of the risers. Vent fittings and pressure gauge fittings shall be shown on the submitted shop drawings.

D. 120-Hour Operational Tests:

1. For systems that run in the occupied mode and unoccupied mode (i.e. night setback conditions with a Building Management System and Direct Digital Control Systems), the 120 hour test shall consist of multiple contiguous occupied and unoccupied periods to verify that the systems perform the required sequence of operations in both the occupied and unoccupied time periods. The setup of the 120-hour Operational Testing shall be witnessed by the Commissioner. **For the systems connected to operational BMS systems with trending, 120-hour Operational Test is not required.**

E. Accepted Tolerance Levels:

1. During occupied and unoccupied periods, the control loops under test shall maintain control of the process variable within the following tolerances:
 - a. Duct Static Pressure +/- 0.3 " wc
 - b. Pump Head Pressure +/- 10% of control range
 - c. Duct Temperature Loops +/- 2 degrees F
 - d. Room Temperature Loops +/- 1 degree F
 - e. Pipe Temperature Loops +/- 2 degrees F
 - f. Duct Humidity +/- 2% rated error of transmitter
 - g. Room Humidity +/- 2% rated error of transmitter

PART 2 - PRODUCTS

2.01 MATERIALS

- A. Certified Test Equipment and Instruments: Type and kind shall be as required for the particular system under test. All gauges, instruments and test devices shall be



provided with a certificate of calibration and calibration curve or letter indicating that a minimum of five (5) test points have been calibrated. The certificate and letter must show date of last calibration. The calibration date must be within a year of the testing date.

- B. Test Media (air, gas, refrigerant, water): As specified for the particular piping or system under test.
- C. Cleaning Agent (chemical solution, steam, water): As specified for the particular piping, apparatus or system being cleaned.
- D. Glycol: Permanent type anti-freeze as manufactured by Dow Chemical Co. or Union Carbide, or approved equal.
- E. Contractor's Responsibility: The Contractor shall provide energy, fuel, oil, water, air, light and electrical instruments as required for all testing.

PART 3 - EXECUTION

3.01 PRELIMINARY WORK

- A. Thoroughly clean pipe and tubing prior to installation. During installation, prevent foreign matter from entering the systems. Prevent if possible and remove stoppages or obstructions from piping and systems.
- B. Thoroughly clean refrigerant pipe prior to pressure or vacuum testing.

3.02 CONTRACTOR'S RESPONSIBILITY

- A. The Contractor shall provide gas, refrigerant, energy, fuel, oil, water, air, light and electrical instruments as required for all testing, including testing associated with Special Inspections (unless otherwise noted).
- B. Although the City of New York will select Special Inspection Firms under separate contract, the Contractor shall furnish labor, material, and instruments necessary to conduct all acceptance tests at no additional cost to the City of New York including testing associated with Special Inspections. Contractor shall provide access for Special Inspections and testing laboratory services.



3.03 PRESSURE TESTS - PIPING

- A. Apply tests as specified below. No work shall be covered or concealed before it is tested. Piping may be concealed after the hydrostatic test and an inspection of the position, pitch and allowance for expansion has been made.
- B. Hydrostatic Tests: hot water systems shall be tested at one and one half times the system design operating pressure, but not less than 100 pounds per square inch hydrostatic pressure maintained for at least 2-hours during the progress of installation. All leaks shall be properly eliminated. Caulking of leaky joints is not permitted. For testing purposes, end of piping to be tested shall be plugged or capped. Convector, thermostatic vacuum traps, float-thermostatic traps, pneumatic valves and other equipments or apparatus which may be damaged by this hydrostatic test shall be excluded from the test.

3.04 TESTING OF EQUIPMENT, APPARATUS AND APPURTENANCES

- A. Hot Water Boilers: Perform field hydrostatic test at 30 psig, after installation, with piping connections shut-off. (N/A for this project)
- B. Pressure Vessels: Perform field hydrostatic test at 1.5 times the maximum operating pressure after installation with all piping connections shut-off.
- C. Boilers and pressure vessels shall be factory tested in accordance with the ASME Boiler and Pressure Code. Per MC 1011.1 Tests: Upon completion of the assembly and installation of boilers and pressure vessels, acceptance tests (above) shall be conducted in accordance with the requirements of the ASME Boiler and Pressure Vessel Code. Boilers shall not be placed in operation upon completion of construction until they have been inspected and tested and a Certificate of Compliance has been issued by the Commissioner. All final inspections and tests for boilers shall be made by a qualified boiler inspector in the employ of the department or a duly authorized insurance company as provided in Section 204 of the Labor Law of the State of New York. Equipment having a Btu input of not more than 350,000 Btu/h shall be exempt from this requirement. Where field assembly of pressure vessels or boilers is required, a copy of the completed low pressure H-2, high pressure P-2 or unfired pressure vessel U-1



Manufacturer's Data Report required by the ASME Boiler and Pressure Vessel Code shall be submitted to the department.

- D. Relief Valves: Increase pressure in equipment or apparatus to relief valve setting to test opening of valves at required relief pressures.
- E. Damper: The dampers, deflectors, and other items and accessories, shall be tested and adjusted during the balancing of systems work.
- F. Test gauges. An indicating test gauge shall be connected directly to the boiler or pressure vessel where it is visible to the operator throughout the duration of the test. The pressure gauge scale shall be graduated over a range of not less than one and one-half times and not greater than four times the maximum test pressure. All gauges utilized for testing shall be calibrated and certified by the test operator. Reference MC 1011.2.

3.05 HEATING, VENTILATING AND AIR CONDITIONING SYSTEMS - CLEANING AND OPERATIONAL TESTING

A. Hot Water Systems

1. After the hot water systems installation has been completed, they shall be chemically cleaned. Notify the Commissioner 5-days in advance of starting the cleaning operation. In the presence of the Commissioner one of the following solutions shall be placed in the system and circulated: (1) Trisodium Phosphate - one pound for each fifty gallons of water in the system; (2) Sodium Carbonate -one pound for each thirty gallons of water in the system; or (3) Sodium Hydroxide (Lye) - one pound for each fifty gallons in the system. Their preference is in the order named, and a solution of only one type shall be used.
2. Fill, vent, and circulate this solution through the system, allowing it to reach design or operating temperature. After circulating for not less than 4-hours, the solution shall be drained completely from the system, strainers shall be cleaned, and the system shall be refilled with fresh water. The water shall be circulated for one hour, and, at that time, a sample of the water shall be tested for alkalinity in the presence of the Commissioner.



3. Operational Test: Run system in an automatic mode for a minimum of 120-Operational hours (after the final balancing as defined in Section 230594).

3.06 REFRIGERATION SYSTEMS (Reference: MC 1108, BC 1704.15)

- A. MC 1108.1 General: Every refrigerant-containing part of every system that is erected on the premises, except compressors, condensers, vessels, evaporators, safety devices, pressure gauges and control mechanisms that are listed and factory tested, shall be tested and proved tight after complete installation, and before operation. Tests shall include both the high-and low-pressure sides of each system at not less than the lower of the design pressures or the setting of the pressure relief device(s). The design pressures for testing shall be those listed on the condensing unit, compressor or compressor unit name-plate, as required by ASHRAE 15.

Exceptions:

1. Systems using an A1 refrigerant erected on the premises with copper tubing not exceeding 5/8-inch (15.8 mm) OD, with wall thickness as required by ASHRAE 15, shall be tested in accordance with MC 1108.1, or by means of refrigerant charged into the system at the saturated vapor pressure of the refrigerant at 70°F (21°C) or higher.

- B. MC 1108.2 Test gases: Tests shall be performed with an inert-dried gas including, but not limited to, nitrogen and carbon dioxide. Oxygen, air, flammable gases and mixtures containing such gases shall not be used.

Exceptions:

1. Mixtures of dry nitrogen, inert gases, or a combination of them with nonflammable refrigerants in concentrations of a refrigerant weight fraction (mass fraction) not exceeding 5 are allowed for tests.

- C. MC 1108.3 Test apparatus: The means used to build up the test pressure shall have either a pressure-limiting device or a pressure-reducing device and a gauge on the outlet side.

- D. MC 1108.4 Declaration: A certificate of test shall be provided for all systems containing 55 pounds (25 kg) or



more of refrigerant. The certificate shall give the name of the refrigerant and the field test pressure applied to the high-side and the low side of the system. The certification of test shall be signed by the installer and shall be made part of the public record.

- E. Operational Test: Run system in an automatic mode for a minimum of 120-Operational hours.

3.07 CHIMNEY AND BREECHING PRESSURE SMOKE TEST (Reference MC 810, BC 1704.23 and 1704.24) (N/A for this project)

- A. After the completion of the stainless steel liner in the existing chimney and breeching, to determine the tightness of both constructions, a Smoke Test shall be made in accordance with the Building Code BC 1704.23 and BC 1704.24. The Commissioner shall witness all Smoke Tests. Independent Special Inspector retained by the City of New York shall additionally witness the Smoke Test. Perform the test when the building is not occupied. Isolate the boiler during the test. No work shall be covered or concealed before testing.
- B. MC 810.1 Test run: Chimneys shall be test run under operating conditions to demonstrate fire safety and the complete exhausting of smoke and the products of combustion to the outer air. The test run shall be witnessed by a registered design professional overseeing the test (i.e. Special Inspector), and the results of such test run shall be certified as correct by such professional and submitted in writing to the department.
- C. MC 810.2 Requirement of a smoke test: A smoke test shall be made as outlined below in MC 810.3. Any faults or leaks found shall be corrected by the Contractor. Such smoke test shall be witnessed by the Commissioner. In lieu thereof, the Commissioner may accept the test report of a registered design professional responsible for the test (Special Inspector) which shall be submitted in writing to the department.
- D. MC 810.3 Smoke test: To determine the tightness of chimney construction, a smoke test shall be made in accordance with the following conditions and requirements:
 - 1. The equipment, materials, power and labor necessary for such test shall be furnished by, and at the expense of the Contractor who is the holder of the



work permit. The City of New York will select HVAC Special Inspection Firm under separate contract.

2. If the test shows any evidence of leakage or other defects, such defects shall be corrected by the Contractor and the test shall be repeated until the results are satisfactory.
3. The Contractor shall fill the breeching/chimney with a thick penetrating smoke produced by one or more smoke machines, or smoke bombs, or other equivalent method. As the smoke appears at the stack opening on the roof, such opening shall be tightly closed and a pressure equivalent to 1/2-inch (13 mm) column of water measured at the base of the stack, shall be applied. The test shall be applied for a length of time sufficient to permit the inspection of the chimney.

3.08 HVAC SYSTEM CLEANING

- A. The Contractor shall be responsible for the removal of visible surface contaminants and deposits from within the HVAC system as defined herein.
- B. The HVAC system includes any interior surface of the facility's air distribution system for conditioned spaces and/or occupied zones. This includes the entire heating, air-conditioning and ventilation system from the points where the air enters the system to the points where the air is discharged from the system. The return air grilles, return air ducts to the air handling unit (AHU), the interior surfaces of the AHU, mixing box, coil compartment, condensate drain pans, dehumidifiers, supply air ducts, fans, fan housing, fan blades, turning vanes, filters, filter housings, reheat coils, and supply diffusers are all considered part of the HVAC system. The HVAC system shall also include other components such as dedicated exhaust and ventilation components and make-up air systems.
- C. For specific scope of duct cleaning at Francis Martin Library see note 10 on drawing M-002.
- D. At Clason's Point Library Contractor shall clean all supply and return outlets and ductwork within Mechanical Room.
- E. Prior to the commencement of any cleaning work, the HVAC contractor shall perform a visual inspection of the HVAC



system to determine appropriate methods, tools, and equipment required to satisfactorily complete the cleaning. The cleanliness inspection should include air handling units and representative areas of the HVAC system components and ductwork. In HVAC systems that include multiple air handling units, a representative sample of the units should be inspected. The cleanliness inspection shall be conducted without negatively impacting the indoor environment through excessive disruption of settled dust, microbial amplification or other debris.

- F. Debris removed during cleaning shall be collected and precautions shall be taken to ensure that debris is not otherwise dispersed outside the HVAC system during the cleaning process.
- G. Particulate Collection: Where the particulate collection equipment is exhausting inside the building, HEPA filtration with 99.97% collection efficiency for 0.3-micron size (or greater) particles shall be used. When the particulate collection equipment is exhausting outside the building, mechanical cleaning operations shall be undertaken only with particulate collection equipment in place, including adequate filtration to contain debris removed from the HVAC system. When the particulate collection equipment is exhausting outside the building, precautions shall be taken to locate the equipment down wind and away from all air intakes and other points of entry into the building.
- H. Component Cleaning: Cleaning methods shall be employed such that all HVAC system components listed in the scope of work must be visibly clean. Upon completion, all components must be returned to those settings recorded just prior to cleaning operations.
- I. Air distribution devices (registers, grilles & diffusers): The contractor shall clean all air distribution devices.
- K. For duct systems, Contractor shall mechanically clean all duct systems indicated in the scope of work to remove all visible contaminants.
- L. Mechanical Cleaning Methodology

Source Removal Cleaning Methods: The HVAC system shall be cleaned using source removal mechanical cleaning methods designed to extract contaminants from within the



HVAC system and safely remove contaminants from the facility. It is the contractor's responsibility to select source removal methods that will render the HVAC system visibly clean, in accordance with all general requirements. No cleaning method, or combination of methods, shall be used which could potentially damage components of the HVAC system or negatively alter the integrity of the system.

1. All methods used shall incorporate the use of vacuum collection devices that are operated continuously during cleaning. A vacuum device shall be connected to the downstream end of the section being cleaned through a predetermined opening. The vacuum collection device must be of sufficient power to render all areas being cleaned under negative pressure, such that containment of debris and the protection of the indoor environment are assured.
2. All vacuum devices exhausting air inside the building shall be equipped with HEPA filters (minimum efficiency), including hand-held vacuums and wet-vacuums.
3. All vacuum devices exhausting air outside the facility shall be equipped with particulate collection including adequate filtration to contain debris removed from the HVAC system. Such devices shall exhaust in a manner that will not allow contaminants to re-enter the facility. Release of debris outdoors must not violate any outdoor environmental standards, codes or regulations.
4. All methods require mechanical agitation devices to dislodge debris adhered to interior HVAC system surfaces, such that debris may be safely conveyed to vacuum collection devices. Acceptable methods will include those, which will not potentially damage the integrity of the ductwork, nor damage porous surface materials such as liners inside the ductwork or system components.

M. Cleanliness Verification

1. General: Verification of HVAC System cleanliness will be determined after mechanical cleaning and before the application of any treatment or introduction of any treatment-related substance to the HVAC system.



2. Visual Inspection: The HVAC system shall be inspected visually to ensure that no visible contaminants are present.

a. If no contaminants are evident through visual inspection, the HVAC system shall be considered clean; however, the Commissioner reserves the right to further verify system cleanliness.

b. If visible contaminants are evident through visual inspection, those portions of the system where contaminants are visible shall be re-cleaned and subjected to re-inspection for cleanliness.

N. Post-Cleaning Report

At the conclusion of the cleaning, the Contractor shall provide a report to the Commissioner indicating the following:

1. Success of the cleaning project, as verified through visual inspection.
2. Areas of the system that were found to be damaged and/or needed repair which were remediated by the Contractor.

END OF SECTION 230593



SECTION 230594
BALANCING OF SYSTEMS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Section 230501, Basic HVAC Requirements, shall be referred to for general requirements. Section 230594 specifies requirements for the final adjusting and balancing of air and hydronic fluid distribution systems, including the equipment and devices associated with each system to produce the design objectives.
- B. The Work shall include checking installations for conformity to design, setting final flow and fan and pump speed, adjusting equipment and devices, recording data, preparing and submitting final balancing reports, and recommending modifications to the mechanical installations.
- C. The following related work is specified in other Sections, and is not part of the Work of this Section:
 - 1. Installation and start-up of equipment and devices
 - 2. Pressure testing of piping and leakage testing ductwork systems.
 - 3. Electrical hook-up and wiring of equipment and devices
- D. Retain the services of an independent testing, adjusting, and balancing firm meeting the qualifications specified to be the single source of responsibility to test, adjust, and perform a final balance of the building mechanical systems specified and identified in this Project.

1.02 PERFORMANCE REQUIREMENTS

- A. Procedures, measurements, instruments and final reports for adjusting and balancing work shall comply with the applicable provisions of the codes, standards, recommendations of the following:



1. American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE)
 2. Sheet Metal and Air Conditioning Contractors' National Association (SMACNA) HVAC SYSTEMS Testing, Adjusting & Balancing Manual (latest edition)
 3. National Environmental Balancing Bureau (NEBB)
 4. Associated Air Balance Council (AABC)
 5. Testing, Adjusting and Balancing Bureau (TABB)
 6. International Training Institute (ITI) for the Sheet Metal and Air Conditioning Industry
 7. New York City Building Code
- B. The final air delivery or intake of each diffuser, grille and register shall be as designed or within 10% of the airflow rates shown on the Drawings.
- C. The final fan airflow rate and static pressure rise across the fan shall be within 10% above the design value at design speed.

1.03 JOB CONDITIONS

- A. Contractor shall have the balancing specialist review all the work with the respective manufacturers of the equipment and devices involved and shall coordinate all the Work. The balancing specialist shall examine the Drawings and Specifications to become familiar with Project requirements and to discover conditions in systems' designs that may preclude proper adjusting and balancing of systems and equipment.
- B. Provide balancing dampers, pressure taps, gauges, valves, and any other items and components as required for a properly balanced system, whether or not specified herein or shown on the Drawings, all at no additional cost to the City of NY. Adjustment or replacement of parts recommended by the balancing specialist shall be made in strict accordance with the respective manufacturer's recommendations.
- C. General Contractor shall have the Temperature Control Contractor set the adjustment of the automatically operated dampers, control valves and all the other items and accessories to operate as required by the balancing contractor.



1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. The balancing company performing the Work of this Section shall be certified by NEBB, AABC, TABB or ITI involving same complexities to those required under this Contract. The testing, adjusting and balancing firm shall have a Professional Engineer Licensed in the State of NY (on staff or a sub-consultant of the testing, adjusting and balancing firm) who shall sign and seal all the reports.

1.05 SUPPLEMENTAL SUBMITTALS

- A. Qualification Data: Submit copies of evidence that the firm and balancing specialist meet the qualifications specified in Supplemental Quality Assurance Article.
- B. Submit blank forms of reports indicating all data to be included and step-by-step procedures. All forms submitted shall be the standard forms issued by NEBB or AABC or as illustrated in the SMACNA HVAC SYSTEMS Testing, Adjusting & Balancing Manual. Custom made forms are not acceptable.
- C. Sample of Report Forms:

Submit standard report forms according to AABC, NEBB or SMACNA standards as an example of the forms that will be submitted when the balancing report is completed. Forms shall include but not be limited to the following information:

1. Title Page:

- a. Company name
- b. Company address
- c. Company telephone number
- d. Project name
- e. Project location
- f. Project Architect
- g. Project Engineer
- h. Project Contractor

2. Instrument List:

- a. Instrument
- b. Manufacturer
- c. Model
- d. Serial number
- e. Range
- f. Calibration date

3. System Diagrams: Include schematic layouts of air and hydronic distribution systems. Present each



system with single-line diagram and include the following:

- a. Quantities of outside, supply, return, and exhaust airflows
 - b. Water flow rates
 - c. Duct, outlet, and inlet sizes
 - d. Pipe and valve sizes and locations
 - e. Terminal units, including VAV
 - f. Balancing stations
 - g. Position of balancing devices
4. Air Moving Equipment: (Supply Fans)
- a. Location
 - b. Manufacturer
 - c. Model
 - d. Airflow, specified and actual
 - e. Return airflow, specified and actual
 - f. Outside airflow, specified and actual
 - g. Total static pressure (total external), specified and actual
 - h. Inlet pressure
 - i. Discharge pressure
 - j. Fan RPM
5. Exhaust Fan Data:
- a. Location
 - b. Manufacturer
 - c. Model
 - d. Airflow, specified and actual
 - e. Total static pressure (total external) specified and actual
 - f. Inlet pressure
 - g. Discharge pressure
 - h. Fan RPM
6. Electric Motors:
- a. Manufacturer
 - b. HP/BHP
 - c. Phase, voltage, amperage; nameplate, actual, no load
 - d. RPM
 - e. Service factor
 - f. Starter size, rating, heater elements
7. V-Belt Drive:
- a. Identification/location
 - b. Required driven RPM
 - c. Driven sheave, diameter and RPM
 - d. Belt, size and quantity



- e. Motor sheave, diameter and RPM
 - f. Center to center distance, maximum, minimum, and actual
8. Duct Traverse:
- a. System zone/branch
 - b. Duct size
 - c. Area
 - d. Design velocity
 - e. Design airflow
 - f. Test velocity
 - g. Test airflow
 - h. Duct static pressure
 - i. Air temperature
 - j. Air correction factor
9. Variable Air Volume Boxes:
- a. Air-Handling unit identification.
 - b. Location and zone.
 - c. Type, non-fan powered or fan powered
 - d. Area served
 - e. Manufacturer
 - f. Number from system diagram
 - g. Type and model number
 - h. Size.
 - i. Design velocity
 - j. Test (final) velocity
 - k. Room Temperature, specified and actual
 - l. Minimum static pressure
 - m. Minimum design airflow
 - n. Maximum design airflow
 - o. Maximum actual airflow
 - p. Inlet static pressure
 - q. Entering-air temperature
 - r. Leaving-air temperature
10. Air Distribution Test Sheet:
- a. Air outlets and inlets number
 - b. Room number/location
 - c. Outlets and inlets type
 - d. Outlets and inlets size
 - e. Area factor
 - f. Design velocity
 - g. Design airflow
 - h. Test (final) velocity
 - i. Test (final) airflow
 - j. Percent of design airflow
11. Outlets and Inlets Unit Data:



- a. Manufacturer
- b. Type, constant, variable, single duct
- c. Identification/number
- d. Location
- e. Model
- f. Size
- g. Minimum static pressure
- h. Minimum design airflow
- i. Maximum design airflow
- j. Maximum actual airflow
- k. Inlet static pressure

12. Pump Data:

- a. Identification/number
- b. Manufacturer
- c. Size/model
- d. Impeller
- e. Service
- f. Design flow rate, pressure drop, BHP
- g. Actual flow rate, pressure drop, BHP
- h. Discharge pressure
- i. Suction pressure
- j. Total operating head pressure
- k. Shut off, discharge and suction pressures
- l. Shut off, total head pressure

13. Air Cooled Condensers and Condensing Units:

- a. Identification/number
- b. Location
- c. Manufacturer
- d. Model
- e. Design and actual pressure drop, flow and temperatures.

14. Cooling Coil Data:

- a. Identification/number
- b. Location
- c. Service
- d. Manufacturer
- e. Airflow, design and actual
- f. Entering air DB temperature, design and actual
- g. Entering air WB temperature, design and actual
- h. Leaving air DB temperature, design and actual
- i. Leaving air WB temperature, design and actual
- j. Air pressure drop, design and actual

15. Heating Coil Data:

- a. Identification/number



- b. Location
 - c. Service
 - d. Manufacturer
 - e. Airflow, design and actual
 - f. Water flow, design and actual
 - g. Water pressure drop, design and actual
 - h. Entering water temperature, design and actual
 - i. Leaving water temperature, design and actual
 - j. Entering air temperature, design and actual
 - k. Leaving air temperature, design and actual
 - l. Air pressure drop, design and actual
- C. Submit copies of the marked-up Contract Drawings and Certificate of Conformance Certification that assures that the balancing specialist has performed their contracted services in accordance with the applicable agency's (NEBB, AABC, TABB or ITI) standards and procedures. Copies of Contract Drawings shall be marked up and indicate outlet/inlet diffuser, register and grille identification.
- D. Submit certified reports signed by the professional engineer of the balancing firm. Submit final testing and balancing results on applicable report forms, as approved and furnished by the agency that is certifying the independent member firm performing the Work. The certifying agencies' Instrument Calibration Report should be included in the submission of the completed final balancing forms. The reports shall be certified proof that the systems have been tested, adjusted and balanced; are an accurate representation of how the systems have been installed and are operating; and are an accurate record of all final quantities measured to establish normal operating values of the systems. Each final system report form shall bear the signature of the person performing the Work and the signature of the Licensed in the State of New York professional engineer of the performing firm.
- E. Include in final reports uncorrected installation deficiencies noted during the process of adjusting and balancing and applicable explanatory comments.

1.06 SCHEDULING

- A. Perform balancing Work in the presence of the Commissioner.



PART 2 - PRODUCTS

2.01 PATCHING MATERIALS

- A. Unless otherwise shown on the Drawings, use same products as originally installed for patching holes in insulation, ductwork and housings that have been cut or drilled for test purposes, including access for test instruments, attaching jigs, and similar purposes.

PART 3 - EXECUTION

3.01 INSPECTION

- A. Do not proceed with adjusting and final balancing until unsatisfactory conditions have been corrected in a manner approved by the balancing specialist and the City of NY.
- B. Examine the air systems to see that they are free from obstructions. Determine that all dampers, grilles and registers are open, that moving equipment is lubricated, that clean filters are installed, automatic controls are functioning, and perform other inspection and maintenance activities necessary for proper operation of the systems.
 1. Examine terminal units, such as variable-air-volume boxes, to verify that they are accessible and their controls are connected and functioning.
- C. Examine the hydronic systems to see that they are free from abnormal obstructions, and that all piping, valves and equipment have been properly made fully operational. Determine that all equipment and control systems are performing correctly by functional testing.

3.02 BALANCING AND ADJUSTING - GENERAL REQUIREMENTS

- A. Notify the Commissioner when any deficiencies are detected, whether associated with design, installation, or equipment.
- B. Balancing specialist shall perform all the procedures and compile all the data for all air and hydronic systems. All standard forms (NEBB, AABC, or SMACNA) approved by the certifying agency (NEBB, AABC, TABB or ITI) shall be completed as applicable to the particular project. Missing or incomplete forms shall be justification to reject the balancing report.



- C. Data shall include a schematic diagram locating the air inlets, air outlets, variable-air volume boxes, fans, equipment, dampers and regulating devices for air systems, and a schematic diagram for location of balancing valves, flow indicators, equipment, and devices for hydronic systems.
- D. All instruments used shall be accurately calibrated and maintained in good working order.

3.03 AIR BALANCING

- A. The final adjusting and balancing of air systems shall include but not be limited to the following:
 - 1. Record and adjust fan rpm to design requirements.
 - 2. Record motor full load amperes.
 - 3. Make pitot tube traverse of main supply ducts and obtain design flow rate at fans.
 - 4. Record system static pressure, velocity pressure and total pressure.
 - 5. Adjust system for design supply, transfer and return airflow rate.
 - 6. Adjust system for minimum and maximum (economizer) design flow rates of outside air.
 - 7. Record return air temperatures.
 - 8. Record entering mix air temperatures.
 - 9. Record leaving air temperatures.
 - 10. Adjust all main supply, return, relief, and exhaust air ducts to proper design flow rate.
 - 11. Adjust each diffuser, grille and register.
 - 12. Each grille, diffuser and register shall be identified as to location and area on the schematic diagram.
 - 13. Size, type and manufacturer of diffusers, grilles and registers and all tested equipment shall be identified and listed in the final report. Manufacturer's data on all equipment shall be used to make required calculations for adjusting and balancing. Readings of diffusers, grilles and registers shall include design required and resultant velocity, required and resultant flow rate after adjustments.



14. All diffusers, grilles and registers shall be adjusted to minimize drafts in all areas.
 15. Dampers shall be permanently marked after air balance is complete so that they can be restored to their correct position, if disturbed later.
 16. Openings in ductwork for pitot tube insertion shall be sealed with snap-in plugs after air balance is complete.
- B. Variable-Air-Volume Systems: After the fan systems have been adjusted, adjust the variable-air-volume systems as follows:
1. Set outside-air dampers at minimum, and return air dampers at a position that simulates full-cooling load.
 2. Select the terminal unit that is most critical to the supply-fan airflow and static pressure. Measure static pressure. Adjust system static pressure so the entering static pressure for the critical terminal unit is not less than the sum of terminal-unit manufacturer's recommended minimum inlet static pressure plus the static pressure needed to overcome terminal-unit discharge system losses.
 3. Measure total system airflow. Adjust to within indicated airflow.
 4. Set terminal units at maximum airflow and adjust to deliver the designed maximum airflow. Use terminal-unit manufacturer's written instructions to make this adjustment. When total airflow is correct, balance the air outlets downstream from terminal units.
 5. Set terminal units at minimum airflow and adjust to deliver the designed minimum airflow. Check air outlets for a proportional reduction in airflow. If air outlets are out of balance at minimum airflow, report the condition but leave outlets balanced for maximum airflow.
 6. Measure static pressure at the most critical terminal unit and adjust the static-pressure controller at the main supply-air sensing station to ensure that adequate static pressure is maintained at the most critical unit.
 7. Record the final fan performance data.



3.04 HYDRONIC SYSTEMS:

The adjusting and balancing of hydronic systems shall include but not limited to the following:

- A. Examine water in systems and determine if water has been treated and cleaned.
- B. Check expansion tank to determine that it is not air bound.
- C. Purge all air vents at high points of water systems, check automatic air vents and determine if they are operating properly.
- D. Coordinate with Temperature Controls Contractor for required heating temperature controls and corresponding automatic valve operation settings.
- E. Open all normally open valves to full open position. Set automatic valves to full coil flow.
- F. Complete air balance shall have been accomplished before final water balance begins.
- G. Check water pumps for pump rotation and for proper flow rate delivery against manufacturers' pump curves.
- H. Set all balancing valves for required flow delivery at mains and branch mains to cooling and heating elements.
- I. Upon completion of final flow readings and adjustments of balancing valves, mark all settings and record data, so that they can be restored to their correct final "balanced" position, if disturbed later.
- J. After required heating temperature controls and balancing valve operation settings are made, recheck pump flow requirements and readjust system as required.
- K. Record pressure drop through coil at set flow rate of coil for full cooling and on full heating. Set pressure drop across bypass valve to match coil pressure drop.
- L. Record and check the following items at each heating element:
 1. Inlet water temperatures and static pressure at connections.



2. Leaving water temperatures and the pressure drop of each coil.
 3. Flow rate through coil with control valve manually wide open.
- M. Record operating suction and discharge pressures of each pump and final total dynamic head and rated amperage versus actual amperage of pump motors.
- N. Record entering and leaving water temperatures and flow through all equipment and devices.
- O. Check and record all flow rates at all locations in the piping system with flow meters.

END OF SECTION 230594



SECTION 230701
PIPING INSULATION (HVAC)

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide thermal insulation on the piping (HVAC) required on this Project, as needed for a complete and proper installation; product specific requirements are contained here; section 230501, Basic HVAC Requirements, shall be referred to for general requirements.
- B. All insulation materials shall be free of asbestos.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Schedule listing items to be insulated, description of insulation and finishing procedures

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Installer's Qualifications: Firm with at least three years successful installation experience on projects with mechanical insulations similar to that required for this Project.
- B. Code and Standards
 - 1. Per MC 1204.1 and MC 1204.2: Insulation characteristics: Pipe insulation installed in buildings shall conform to the requirements of the Energy Conservation Construction Code of New York State, shall be tested in accordance with ASTM E 84 and shall have a maximum flame spread index of 25 and a smoke developed index not exceeding 50. Insulation installed in an air plenum shall comply with MC 602.2.1. MC 602.2.1 requires that materials exposed within plenums shall be noncombustible or shall have a flame spread index of not more than 25 and a smoke-developed index of not more than 50 when tested in accordance with ASTM E 84.



Hydronic piping shall be insulated to the thickness required by the Energy Conservation Construction Code of New York State.

2. All insulation material shall be in accordance with the above ASTM E 84 requirements or have OTCR approval.
3. Comply with ASTM, ASHRAE and New York State Energy Conservation Construction Code Standards.
4. Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

1.05 TEMPERATURE REQUIREMENT

- A. Apply adhesive, sealers, coating, and all other items and accessories at the proper temperature as recommended by the manufacturer. If ambient conditions are not acceptable, provide temporary heat as required for proper installation without any delay to the Project completion.

1.06 COORDINATION

- A. Coordinate size and location of supports, hangers, and insulation shields
- B. Coordinate clearance requirements with piping installer for insulation application. Establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

PART 2 - PRODUCTS

2.01 MANUFACTURERS



A. Approved Manufacturers:

1. Thermafiber
2. Armstrong World Industries, Inc.
3. CertainTeed Corp.
4. Knauf Fiber Glass (Permawick Pipe Insulation)
5. Johns Manville
6. The Dow Chemical Company (Building Materials)
7. Owens-Corning Fiberglas Corp. (including Owens Corning Evolution and VaporWick)
8. Pittsburgh Corning Corp.
9. Rubatex Corp.
10. Venture Tape Corp.
11. Or approved equal.

2.02 MATERIALS

- A. Adhesives and Sealants for Insulation: All adhesives and sealants used on interior building insulation shall comply with the South Coast Air Quality Management District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond to an effective date of the SCAQMD Rule #1168 of July 1, 2005, and Rule Amendment date of January 7, 2005.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Foam insulation materials shall not use CFC or HCFC agents in the manufacturing process.
- D. Pipe Insulation
1. One-piece molded sectional fiber glass insulation made from inorganic glass fibers bonded with a thermosetting resin shall have a nominal 4-pound density with a thermal conductivity (k) of not over 0.23 at 75° F. mean temperature. Insulations shall have factory-applied all-service jacket (ASJ) and adhesive used to adhere the jacket to the insulation. Insulation shall be suitable for use on piping up to 450° F. operating temperature.
 2. Preformed polyisocyanurate closed cell insulation with a k-factor of 0.19 at 75° F mean temperature and factory applied Polyvinylidene Chloride (PVDC) vapor retarder film for use in refrigerant lines the equal to Trymer 2000 with Saran Vapor Retarder by The Dow Chemical Company. The insulation thickness shall not exceed 1.0".
 3. Mineral-Fiber, Pipe Insulation Wicking System: Preformed pipe insulation made from inorganic glass fibers bonded with a thermosetting resin with



absorbent cloth factory applied to the entire inside surface of preformed pipe insulation and extended through the longitudinal joint to outside surface of insulation under insulation jacket. Factory apply a white, polymer, vapor-retarder jacket with self-sealing adhesive tape seam and evaporation holes running continuously along the longitudinal seam, exposing the absorbent cloth. This type of wicking insulation shall be applied as an alternate to the cold piping (refrigerant) systems. Provide Knauf PermaWick Pipe Insulation, Owens Corning VaporWick Pipe Insulation, Pittsburg Corning Corp, or approved equal.

4. Fiberglas Paper-Free ASJ Pipe Insulation: Molded fibrous glass pipe insulation with factory applied paper free all service jacket and double adhesive lap seal closure system, rated for a maximum service temperature of 850°F. Circumferential joints shall be sealed with paper free butt strips that are compatible with the required facing. Stapling shall not be required to complete the closure. Manufacturer's data regarding thickness constraints in relation to operating temperature shall be followed. On cold systems, vapor barrier shall be provided. All penetrations and exposed ends of insulation shall be sealed with mold resistant vapor barrier mastic.

E. Jackets

1. Factory-applied: ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing. PVDC-SSL Jacket: PVDC jacket with a self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip. For cold water pipe insulation, the jackets shall be the vapor barrier type, ASJ or PVDC.
2. PVC Plastic: Zeston, one piece molded type fitting covers and jacketing material, gloss white. Connections: Tacks, pressure sensitive color matching vinyl tape. Other Manufacturers: Knauf Fiber Glass (PermaWick Pipe Insulation, Amerisafe or approved equal.
3. Vapor barrier and weatherproofing jacket shall be a laminated five-ply self-adhesive material; temperature range: -30° F to 300° F; weather resistant; high puncture, tear resistant; product shall be used both indoors and outdoors; zero permeability; manufactured



with mold inhibitors, all grade.

4. For outdoor pipe insulations, the jackets shall be made of 0.016" aluminum or stainless steel held with a friction type, Z-lock. The laminated self-adhesive vapor barrier and weatherproofing jacket, will also be accepted.
- F. Insulation and accessories for valves, fittings, flanges etc. shall include the following:
1. One pound density fiberglass blanket.
 2. Segments of pipe insulation.
 3. Pre-molded fiberglass fittings.
 4. No. 20 gage galvanized steel annealed wire.
 5. Insulating cement.
 6. In lieu of using coated pre-molded fittings for insulating fittings, valves etc., premolded 20-mil thick, high impact ultraviolet-resistant one piece PVC fitting covers and precut Hi-Lo-Temp insulation inserts. For chilled water pipes and refrigerant pipes/tubing, the use of prefabricated insulation for valves, fittings, flanges etc. For cold piping systems (refrigerant lines), the use of the wicking type insulation for valves, fittings, flanges etc.
- G. Bands, staples, tapes, wires, cements, adhesives, sealers and protective finishes: As specified herein or as recommended by insulation manufacturer for proper uses on piping insulations.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Before applying the insulation, all tests specified in Division 23 Sections should have been completed acceptable to the Commissioner. However, thermal insulation can be applied to pipes prior to these tests providing that all fittings are left bare to permit detection and possible leaks.

3.02 SUPPLEMENTAL INSTALLATION

- A. Install insulation on pipe systems subsequent to testing and acceptance of tests.



- B. Install insulation materials with smooth and even surfaces. Insulate each continuous run of piping with full-length units of insulation, with single cut piece to complete run. Do not use cut pieces or scraps abutting each other.
- C. Clean and dry pipe surfaces prior to insulating. Butt insulation joints firmly together to ensure complete and tight fit over surfaces to be covered.
- D. Maintain integrity of vapor-barrier jackets on pipe insulation and protect to prevent puncture or other damage.
- E. Valves shall be insulated up to packing unit.
- F. Fire Seal Application: Where pipes pass through fire walls, fire partitions, fire rated pipe chase walls or floors above grade, insulation shall be interrupted and a fire seal shall be provided as specified in Section 078400: Firestopping.
- G. Extend piping insulation without interruption through walls, floors, and similar piping penetrations, except where otherwise indicated.
- H. The temperature of the jacket shall not exceed 150° F.
- I. Paper laminated jackets shall be permanently treated to retain the flame spread and smoke developed rating. Chemicals used for treating paper jacket laminates shall not be water soluble and shall be unaffected by water and humidity.
- J. Insulation on all cold surfaces must be applied with a continuous, unbroken vapor seal. Hangers, supports, anchors, etc., that are secured directly to cold surfaces must be adequately insulated and vapor sealed to prevent condensation.
- K. All surface finishes are to be extended to protect all surfaces, ends and raw edges of insulation.
- L. General valves, fittings, etc. shall be insulated as follows:
 - 1. For pipe sizes smaller than 4" wrap firmly under a minimum of a 3:1 compression, with 1 pound density fiberglass blanket, to a thickness equal to adjoining insulation. Secure with No. 20 gage galvanized annealed steel wire. Finish with a smooth coat of insulating cement.
 - 2. For pipe sizes 4" and larger, fit segments of pipe insulation equal in thickness to adjoining insulation



and secure with No 20-gage galvanized annealed steel wire. Finish with a smooth coat of insulating cement.

3. In lieu of the foregoing methods, the use of pre-molded fiberglass fittings of the same thickness of adjoining pipe insulation will be accepted. Finish with a smooth coat of insulating cement.
 4. In lieu of the foregoing methods, the use of preformed PVC fitting covers with factory precut Hi-Lo Temp insulation insert of the same thickness as adjoining pipe insulation will be accepted. Valves, fittings, etc. shall be insulated by applying the proper factory precut Hi-Lo Temp insulation insert to the pipe fitting, valve, etc. The ends of the Hi-Lo Temp insulation insert shall be tucked snugly into the throat of the fitting, valve etc. and the edges adjacent to the pipe covering tufted and tucked in, fully insulating the pipe fitting, valve, etc. Vapor barrier mastic compatible with the PVC shall be applied around the edges of the adjoining pipe insulation and on the fitting cover throat overlap seam. The PVC fitting cover shall then be applied and shall be secured with pressure sensitive tape along the circumferential edges. The tape shall extend over the adjacent pipe insulation and have an overlap on itself at least 2" on the downward side.
- M. Cold Piping: Install the fiberglass, closed cell or wicking type insulation with factory supplied vapor barrier jacket. The use of staples on vapor barrier jacketed insulation is not permitted. The use of vapor barrier and weather proofing jacket on cold water piping systems will be accepted.
- N. Hot Piping: Install the fiber glass insulation with factory supplied jacket. Butt all joints firmly together and smoothly secure all jacket laps and joints strips with lap adhesive. Valves, fittings, etc. shall be insulated as specified in the Article 3.02.L.
- O. Insulation and Protection at Points of Support
1. Install inserts made from rigid calcium silicate pipe insulation at all points of support. Inserts shall be not less than 12" long and of thickness equal to adjoining insulation. A jacket shall be installed over the insert with longitudinal laps and butt strips for circumferential joints smoothly secured with insulation adhesive. Jacket shall provide vapor barrier where required.
 2. Install galvanized steel shields between supports and inserts. Shields shall be formed to fit the insulation



and shall extend up to the centerline of the pipe and of the length specified for the inserts. Supports shall not pierce the insulation and all vapor barriers shall be unbroken and continuous.

3. In lieu of the foregoing methods, the use of factory fabricated saddle and shields specified in Section 230501 will be accepted.

P. Outdoor Piping

1. All exposed pipes shall be insulated in accordance with the hot or cold piping Paragraphs as required and shall further be protected with a weatherproof finish. Install aluminum, stainless steel, or laminated self-adhesive vapor barrier and weatherproofing jackets. Joints shall be sealed along the longitudinal seam and circumferential joints with butt strips, minimum 2" wide. Insulation shall be of the waterproof construction.
2. Fitting and valves shall be insulated with segments of the molded insulation and shall be covered using preformed aluminum or stainless steel fittings identical in composition to the jacket. All joints shall overlap 1" and shall be completely weather proof.

3.03 PROTECTION AND REPLACEMENT

- A. Replace damaged insulation during construction that cannot be repaired satisfactorily, including units with vapor barrier damage and moisture saturated units.
- B. Protection: Insulation worker shall advise Contractor of required protection for insulation work during remainder of construction period, to avoid damage and deterioration.

3.04 SCHEDULE OF PIPE INSULATION

- A. The following piping systems shall be insulated
 1. Cold water, make-up water, supply and return piping for hot water systems. Bonnets of valves in hot water piping shall also be insulated.
 2. Refrigerant piping.
- B. Recommended Thickness: (per 2010 NYSECC Table 503.2.8, based on insulation having a conductivity (k) not exceeding $0.27 \text{ BTU} \cdot \text{in}/\text{ft}^2 \cdot ^\circ\text{F} \cdot \text{h}$)



Fluid	NOMINAL PIPE DIAMETER	
	<=1.5"	>1.5"
Hot Water/Dual Temp	1½"	2"
Refrigerant	1½"	1½"

END OF SECTION 230701



THIS PAGE LEFT INTENTIONALLY BLANK



SECTION 230703
DUCTWORK INSULATION

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide thermal insulation on the ductwork installed and required on this Project shown on the Drawings, specified herein and needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements, shall be referred to for general requirements.
- B. All insulation materials shall be free of asbestos.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Submit schedule showing manufacturer's product number, k-value, thickness and furnished accessories for each duct system requiring insulation.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Installer's Qualifications: Firm with at least three years successful installation experience on projects with mechanical insulations similar to that required for this Project.
- B. Flame/Smoke Ratings: Provide mechanical insulation with flame spread index of 25 or less and smoke developed index of 50 or less, as tested by ASTM E-84 method and as defined in the NYC Mechanical Code. Insulation shall not flame, glow, smolder or smoke when tested in accordance with ASTM C 411 at the temperature to which they are exposed in service or a minimum of 250F per MC 604.3.
- C. Code and Standards: Comply with New York City Construction Code, New York State Energy Conservation Construction Code and ASHRAE Standards.
- D. Identification: External duct insulation and factory-insulated flexible duct shall be legibly printed or



identified at intervals not greater than 36 inches with the name of the manufacturer, the thermal resistance R-value at the specified installed thickness and the flame spread and smoke-developed indexes of the composite material per MC 604.7.

- E. Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

A. Approved Manufacturers:

1. Armstrong World Industries, Inc.
2. Babcock & Wilcox; Insulating Products Div.
3. Certain Teed Corp.
4. Knauf Fiber Glass.
5. Johns Manville
6. Owens-Corning Fiberglass Corp.
7. Pittsburgh Corning Corp.
8. Rubatex Corp.
9. Thermal Ceramics
10. 3M
11. Venture Tape Corp.
12. Unifrax FyreWrap
13. Or approved equal

2.02 MATERIALS

- A. Adhesives and Sealants for Insulation: All sealants used on interior building insulation shall comply with the South Coast Air Quality Management District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond to an effective date of the SCAQMD Rule #1168 of July 1, 2005, and Rule Amendment date of January 7, 2005.
- B. Board Type: Fiberglass board: 3-lb minimum density, thermal conductivity not exceeding 0.23 at 75o F mean temperature,



factory applied facing of aluminum foil reinforced with fiberglass yarn mesh and laminated to 40 lb kraft paper chemically treated to give the permanent flamespread and smoke-developed characteristics required. The use of plain (unfaced) fiberglass board on ductwork serving only as heating supply ducts is also acceptable.

- C. Flexible Type: Flexible (blanket) type fiberglass: 1-lb nominal density, thermal conductivity not exceeding 0.29 at 750 F mean temperature; factory applied foil reinforced kraft facing as specified for the fiberglass board.
- D. Asbestos free rigid hydrous calcium or magnesium silicate block shall be lightweight with thermal conductivity not exceeding 0.42 at 200° F mean temperature.
- E. Calcium-Magnesium-Silicate (CMS) Wool Wrap: CMS wool wrap blanket insulation shall be flexible, high temperature rated and shall have Omega Point Labs (OPL) or UL listing in accordance with ASTM E 2336 (or OTCR approval). The insulation blanket shall be fully encapsulated in an aluminum foil fiberglass reinforced scrim covering. Provide Unifrax Corporation FyreWrap EZ1.5; 3M Fire Barrier Duct Wrap15A; Thermal Ceramics FireMaster FastWrap+ or approved equal. Blanket insulation shall have NYC OTCR approval or Omega Point Labs (OPL) or UL listing in accordance with ASTM E 2336 or applicable legacy MEA calendar number.
- F. Jackets for Ductwork Insulation: ASTM C-921; Type I for ductwork with temperatures below ambient; Type II for ductwork with temperatures above ambient. (Type I-Vapor Barrier, Type II-Water Vapor Permeable).
- G. Ductwork Insulation Accessories: Provide staples, bands, wires, tape, anchors, corner angles and all other items and accessories recommended by insulation manufacturer for applications indicated.
- H. Ductwork Insulation Compounds: Provide cements, adhesives, coatings, sealers, protective finishes and all other items and compounds recommended by insulation manufacturer for applications indicated.
- I. Vapor barrier and weatherproofing jacket shall be a laminated five-ply self-adhesive permanent acrylic system; suitable operating range from -30° F to 300° F; weather resistant; high puncture, tear resistant; product shall be used both indoors and outdoors; zero permeability; manufactured with mold inhibitors.

PART 3 - EXECUTION



3.01 COMPLETION OF TESTS

- A. Before applying the insulation, all tests specified in Division 23 Sections should have been completed. Do not proceed with work until unsatisfactory conditions have been corrected in a manner acceptable to the City of New York.

3.02 SUPPLEMENTAL INSTALLATION

- A. Omit insulation if duct is internally lined with acoustic material of sufficient thermal conductivity providing a conductive resistance as required by the New York State Energy Conservation Construction Code. Materials used as internal insulation and exposed to the air stream in ducts shall be shown to be durable when tested in accordance with UL 181. Exposed internal insulation that is not impermeable to water shall not be used to line ducts or plenums from the exit of a cooling coil to the downstream end of the drain pan. (Reference MC 604.13). Omit insulation on ductwork where the design temperature difference between interior and exterior of duct does not exceed 15 degrees F (such as in return air plenums) per the 2007 NYSECCC Article E803.2.8.
- B. Duct coverings shall not penetrate a wall or floor required to have a fire resistance rating or required to be fireblocked per MC 604.6. Linings shall be interrupted at the area of operation of a fire damper and at a minimum of 6" upstream of and 6" downstream of electric resistance and fuel burning heaters in a duct system. Metal nosings or sleeves shall be installed over exposed duct liner edges that face opposite the direction of airflow per MC 604.8.
- C. Fiberglass board shall be used to insulate ductwork that is exposed in fan or equipment rooms or spaces where the design temperature difference between interior and exterior of duct exceeds 15 degrees F per the 2007 NYSECCC Article E803.2.8.
- D. Flexible type duct insulation shall be used to insulate ductwork which is installed in concealed spaces (hung ceilings, furred spaces, pipe and duct spaces, crawl spaces and tunnels) where the design temperature difference between interior and exterior of duct exceeds 15 degrees F per the 2007 NYSECCC Article E803.2.8.
- E. Facing and Finishing:
 1. Exposed Ducts: Insulation on ductwork exposed to view in Boiler Room, Boiler Room Area, Equipment and Mechanical Rooms, and shall have facing or finish as specified herein: Facing or finish shall be reinforced



with metal corner beads and shall have a glass cloth finish installed in the following manner: Brush a full coat of lagging adhesive on all surfaces of the ductwork insulation. Imbed glass cloth in the wet coating, smoothing to avoid wrinkles. Overlap cloth seams 4", locating seams so as to be hidden from view, wherever practicable. Apply a second coat of lagging adhesive.

2. Concealed Ducts: Insulation on warm air ductwork installed within pipe and duct spaces, storerooms, hung ceilings, furred spaces, or pipe tunnels shall have no additional finishing, other than the foil-reinforced-kraft facing. All cold air ductwork for the above spaces shall be provided with two coats of a vapor retardant coating at least 1/16" thick with a layer of glass cloth in between or vapor barrier and weatherproofing jacket.

F. Installation of Board Type Insulation

1. Insulation shall be applied with edges tightly butted. It shall be impaled on pins welded to the duct and secured with speed clips impaled over the pins. Pins shall be cut off close to speed clips. On horizontal ducts, pins shall be spaced not less than one per square foot for the bottom surface, and not less than one per two square feet on the sides and top surface. On vertical ducts, the pins shall be spaced not less than one clip per two square feet of duct surface. For faced insulation, point all joints and cracks with vapor barrier coating, and seal all joints and speed clips with a 3" wide strip of foil-reinforced-kraft facing adhered with insulation adhesive. The use of pressure sensitive tape of the same facing material also is acceptable for this purpose. For cold air ductwork, the laminated self-adhesive vapor barrier and weatherproofing jacket will be accepted.
2. Where, because of space or size restriction, the welded pin method cannot be used, the use of stick clips will be approved and the insulation shall be additionally secured to the duct with insulation adhesive. The adhesive shall cover the entire surface of the sheet metal when applied to underside of horizontal duct, but may be applied in strips for application to top and sides with a minimum of 50% coverage. Insulation shall be additionally secured with No. 16 gage soft annealed galvanized steel wire on not more than 12" centers. Continuous metal, corner angles shall be used to protect edges of the insulation.



- G. Installation of Flexible Type Insulation: Flexible type insulation shall be cut slightly longer than the perimeter of the duct to insure full thickness at corners. Insulation shall be applied with edges tightly butted, and seams stapled approximately 6" on centers with outward clinching staples. Insulation shall be additionally secured with No. 16 gage soft annealed galvanized steel wire on not more than 12" centers. When the width of a horizontal duct is 24" or more, the insulation shall also be fastened with welded pins or stick clips spaced on 18" centers on the bottom surface of the duct. All joints and clips shall be taped and sealed with 3" wide strips of foil-reinforced-kraft facing applied with insulation adhesive. The use of pressure sensitive tape of the same facing material also is acceptable for this purpose. For cold air ductwork the laminated self-adhesive vapor barrier and weatherproofing jacket will be accepted.
- H. Insulation for Outdoor Ductwork: Outdoor ductwork shall be insulated with board type insulation having a vapor barrier consisting of two coats of a vapor retardant coating, at least 1/16th inch thick with a layer of glass cloth in between. After the insulation has been installed, it shall be covered with an aluminum jacket conforming to ASTM B209, 3003 alloy, H-14 temper, 0.020 inches thick with 1-1/4 inches corrugations or 0.032 inches thick with no corrugations. Jacket shall use lock joint or other approved system for a continuous weather tight system. A 2" overlap is required at longitudinal and circumferential joints. The use of vapor barrier and weatherproofing jacket in lieu of the vapor barrier coating and aluminum jacket will be accepted. Access doors and other items requiring maintenance or access shall be removable and sealable.
- I. Clean and dry ductwork prior to insulating. Butt insulation joints firmly together to ensure complete and tight fit over surfaces to be covered.
- J. Maintain integrity of vapor-barrier on ductwork insulation, and protect it to prevent puncture and other damage.
- K. Extend ductwork insulation without interruption through walls, floors and similar ductwork penetrations, except where otherwise indicated such as rated penetrations.

3.03 EXISTING INSULATION REPAIR

- A. Repair damaged or removed sections of existing duct insulation, both previously damaged/removed and damaged/removed during construction. Use insulation of same type and thickness as existing insulation, install new jacket lapping and sealed over existing.



3.04 PROTECTION AND REPLACEMENT

- A. Replace damaged insulation that cannot be repaired satisfactorily, including units with vapor barrier damage and moisture saturated units.
- B. Protection: Insulation Worker shall advise Contractor of required protection for insulation work during remainder of construction period, to avoid damage and deterioration.

3.05 SCHEDULES OF DUCTWORK INSULATION

- A. Insulation Omitted: Do not insulate the following:
 - 1. Access door, test hole fittings, damper quadrants, except as otherwise specified. The adjoining insulation shall be neatly finished around such devices.
 - 2. Exhaust ductwork need not be insulated, except the portion of the duct between motorized spill damper and spill louver.
- B. Exposed Ducts/Plenums in Boiler Room, Boiler Room Area, Equipment and Mechanical Rooms (Article applies to hot and cold ducts where the design temperature difference between interior and exterior of duct exceeds 15 degrees F per the 2007 NYSECCC Article E803.2.8.):
 - 1. Insulate
 - a. All outside air intake plenums not pre-insulated at the factory.
 - b. Outdoor air intake ducts in their entirety.
 - c. Exhaust duct from motorized spill damper to spill louver.
 - d. Supply and return ducts
 - e. Heating plenums not pre-insulated at the factory
 - 2. Insulate the above with rigid fiberglass board, 2" thick.
- C. Insulate the following where the design temperature difference between interior and exterior of duct exceeds 15 degrees F per the 2007 NYSECCC Article E803.2.8:
 - 1. Dual Temperature Ductwork: Concealed hot/cold supply and return ductwork between fan discharge or HVAC unit discharge and room terminal inlets and outlets.
 - 2. Insulate system specified above with the following:



- a. Flexible Fiberglass: 2" thick, application limited to concealed locations.

END OF SECTION 230703



SECTION 230923

TEMPERATURE CONTROL SYSTEM WITH WEB-BASED BUILDING MANAGEMENT
SYSTEM FOR FRANCIS MARTIN BRANCH LIBRARY

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Furnish all labor, materials, equipment, and service necessary for a complete and operating Temperature Control System (TCS) and Building Management System (BMS), utilizing Direct Digital Controls as shown on the drawings and as described herein. Drawings are diagrammatic only.
- B. All labor, material, equipment and software not specifically referred to herein or on the plans, that is required to meet the functional intent of this specification, shall be provided without additional cost to the CITY.

1.02 SYSTEM DESCRIPTION

- A. The entire Temperature Control System (TCS) shall be comprised of a network of interoperable, stand-alone digital controllers and/or of commercial programmable thermostats communicating via LonMark/LonTalk communication protocols to a Network Area Controller (NAC).
- B. The Building Management System (BMS) shall be comprised of Network Area Controller or Controllers (NAC) within the facility. The NAC shall connect to the City of New York local area network. Access to the system shall be accomplished through standard Web browsers, via the Internet and local area network. Each NAC shall communicate to LonMark/LonTalk (IDC) controllers and other open protocol systems/devices provided under Division 23 or Division 26.
- C. The Building Management System (BMS) as provided in this Division shall be based on the Honeywell WEBS System incorporating the Niagara Framework.

1.03 GENERAL

- A. The Temperature Control System (TCS) and Building Management System (BMS) shall be comprised of a network



of interoperable, stand-alone digital controllers and/or communicating thermostats, a computer system, graphical user interface software, network devices, valves, dampers, sensors, and other devices as specified herein.

- B. The installed system shall provide secure password access to all features, functions and data contained in the overall BMS.

1.04 SUBMITTAL

- A. Five copies of shop drawings of the components and devices for the entire control system shall be submitted and shall consist of a complete list of equipment and materials, including manufacturers catalog data sheets and installation instructions for all controllers, valves, dampers, sensors, etc. Shop drawings shall also contain complete wiring and schematic diagrams, software descriptions, calculations, and any other details required to demonstrate that the system has been coordinated and will properly function as a system. Terminal identification for all control wiring shall be shown on the shop drawings. A complete written Sequence of Operation shall also be included with the submittal package. Contractors supplying products and systems, as part of their packages shall provide catalog data sheets, wiring diagrams and point lists to the contractor for proper coordination of work.
- B. Submittal shall also include a complete point list of all points to be connected to the TCS and BMS. Contractors shall provide necessary point lists, protocol documentation, and factory support information for systems provided in their respective divisions but integrated into the BMS.
- C. Submittal shall also include a copy of each of the graphics developed for the Graphic User Interface including a flowchart (site map) indicating how the graphics are to be linked to one another for system navigation. The graphics are intended to be 80% - 90% complete at this stage with the only remaining changes to be based on review comments from the Commissioner and/or City of New York.

1.05 SPECIFICATION NOMENCLATURE

- A. Acronyms used in this specification are as follows:

BMS	Building Management System
TCS	Temperature Control System



NAC	Network Area Controller
IDC	Interoperable Digital Controller
GUI	Graphical User Interface
WBI	Web Browser Interface
DDC	Direct Digital Controls
LAN	Local Area Network
OOT	Object Oriented Technology

1.06 DIVISION OF WORK

- A. The contractor shall be responsible for all controllers, thermostats, control devices, control panels, controller programming, controller programming software, controller input/output, low voltage power wiring and controller network wiring.
- B. The contractor shall be responsible for the Network Area Controller(s) (NAC), software and programming of the NAC, graphical user interface software (GUI), development of all graphical screens, Web browser pages, setup of schedules, logs and alarms, LonWorks network management and connection of the NAC to the local area network.

1.07 RELATED WORK SPECIFIED ELSEWHERE

- A. Division 26, Electrical:
 - 1. Providing motor starters and disconnect switches (unless otherwise noted).
 - 2. Power wiring and conduit (unless otherwise noted).
 - 3. Provision, installation and wiring of smoke detectors (unless otherwise noted).
 - 4. Other equipment and wiring, as specified in Division 26.

1.08 SOFTWARE LICENSE AGREEMENT

- A. The City of New York shall be the named license holder of all software associated with any and all incremental work on the project(s). In addition, the City of New York shall receive usership of all job specific configuration documentation, data files, and application-level software developed for the project.



This shall include all custom, job specific software code and documentation for all configuration and programming that is generated for a given project and/or configured for use with the NAC, BMS Server(s), and any related LAN / Intranet and Internet connected routers and devices. Any and all required IDs and passwords for access to any component or software program shall be provided to the City of New York.

1.09 DELIVERY, STORAGE AND HANDLING

- A. Provide factory-shipping cartons for each piece of equipment and control device. Maintain cartons through shipping, storage and handling, as required to prevent equipment damage. Store equipment and materials inside and protected from weather.

1.10 JOB CONDITIONS

- A. Cooperation with Other Trades: Coordinate the Work of this section with that of other sections to ensure that the Work will be carried out in an orderly fashion. It shall be this Contractor's responsibility to check the Contract Documents for possible conflicts between his Work and that of other crafts in equipment location, pipe, duct and conduit runs, electrical outlets and fixtures, air diffusers, and structural and architectural features.

PART 2 - MATERIALS

2.01 OPEN, INTEROPERABLE, INTEGRATED ARCHITECTURES

- A. The intent of this specification is to provide a peer-to-peer networked, stand-alone, distributed control system with the capability to integrate LonWorks technology and other open and proprietary communication protocols in one open, interoperable system.
- B. The supplied computer software shall employ object-oriented technology (OOT) for representation of all data and control devices within the system. In addition, adherence to industry standards including ANSI / ASHRAE Standard 135-2001, BACnet and LonMark to assure interoperability between all system components is required.
- C. All components and controllers supplied under this Division shall be true "peer-to-peer" communicating devices. Components or controllers requiring "polling" by a host to pass data shall not be acceptable.
- D. The supplied system must incorporate the ability to access all data using standard Web browsers without requiring proprietary operator interface and



configuration programs. An Open DataBase Connectivity (ODBC) or Structured Query Language (SQL) compliant server database is required for all system database parameter storage. This data shall reside on a supplier-installed server for all database access. Systems requiring proprietary database and user interface programs shall not be acceptable.

E. A hierarchical topology is required to assure reasonable system response times and to manage the flow and sharing of data without unduly burdening the customer's internal Intranet network. Systems employing a "flat" single tiered architecture shall not be acceptable.

1. Maximum acceptable response time from any alarm occurrence (at the point of origin) to the point of annunciation shall not exceed 5 seconds for network connected user interfaces.
2. Maximum acceptable response time from any alarm occurrence (at the point of origin) to the point of annunciation shall not exceed 60 seconds for remote or dial-up connected user interfaces.

2.02 NETWORKS

A. The Local Area Network (LAN) shall be a 100 Megabits/sec Ethernet network supporting Java, XML, HTTP, and SOAP for maximum flexibility for integration of building data with enterprise information systems and providing support for multiple Network Area Controllers (NACs), workstations and, if specified, a local server.

B. LAN minimum physical and media access requirements:

1. Ethernet; IEEE standard 802.3.
2. Cable; 100 Base-T, UTP-8 wire, category 5.
3. Minimum throughput; 100 Mbps.

2.03 NETWORK ACCESS

A. Remote Access.

1. For Local Area Network (LAN) installations, provide access to the LAN from a remote location, via the Internet. The City of New York shall provide a connection to the Internet to enable this access via high-speed cable modem,



asynchronous digital subscriber line (ADSL) modem, ISDN line, T1 Line or via the customer's Intranet to a corporate server providing access to an Internet Service Provider (ISP).

2.04 NETWORK AREA CONTROLLER (NAC)

- A. The ATC contractor shall supply one or more Network Area Controllers (NAC) as part of this contract. Number of area controllers required is dependent on the type and quantity of devices provided under Divisions 23 and 26. It is the responsibility of the ATC contractor to coordinate with the contractors to determine the quantity and type of devices.
- B. The Network Area Controller (NAC) shall provide the interface between the LAN and the field control devices, and provide global supervisory control functions over the control devices connected to the NAC. It shall be capable of executing application control programs to provide:
1. Calendar functions
 2. Scheduling
 3. Trending
 4. Alarm monitoring and routing
 5. Time synchronization
 6. Integration of LonWorks controller data and BACnet controller data
 7. Network Management functions for all LonWorks based devices
- C. The Network Area Controller must provide the following hardware features as a minimum:
1. One Ethernet Port - 10/100 Mbps
 2. One RS-232 port
 3. One LonWorks Interface Port - 78KB FTT-10A
 4. One RS-485 ports
 5. Battery Backup
 6. Flash memory for long term data backup (If battery backup or flash memory is not supplied, the controller must contain a hard disk with at least 1 gigabyte storage capacity)
 7. The NAC must be capable of operation over a temperature range of 32 to 122°F
 8. The NAC must be capable of withstanding storage temperatures of between 0 and 158°F
 9. The NAC must be capable of operation over a humidity range of 5 to 95% RH, non-condensing.



- D. The NAC shall provide multiple user access to the system and support for ODBC or SQL. A database resident on the NAC shall be an ODBC-compliant database or must provide an ODBC data access mechanism to read and write data stored within it.
- E. The NAC shall support standard Web browser access via the Intranet/Internet. It shall support a minimum of 32 simultaneous users.
- F. Event Alarm Notification and actions:
 - 1. The NAC shall provide alarm recognition, storage; routing, management, and analysis to supplement distributed capabilities of equipment or application specific controllers.
 - 2. The NAC shall be able to route any alarm condition to any defined user location whether connected to a local network or remote via dial-up telephone connection, or wide-area network.
 - 3. Alarm generation shall be selectable for annunciation type and acknowledgement requirements including but limited to:
 - a. To alarm
 - b. Return to normal
 - c. To fault
- G. Control equipment and network failures shall be treated as alarms and annunciated.
- H. Alarms shall be annunciated in any of the following manners as defined by the user:
 - 1. Screen message text
 - 2. Email of the complete alarm message to multiple recipients. Provide the ability to route and email alarms based on:
 - a. Day of week
 - b. Time of day
 - c. Recipient
 - 3. Pagers via paging services that initiate a page on receipt of email message
 - 4. Graphic with flashing alarm object(s)
 - 5. Printed message, routed directly to a dedicated alarm printer
- I. The following shall be recorded by the NAC for each alarm (at a minimum):
 - 1. Time and date
 - 2. Location (building, floor, zone, office number, etc.)



3. Equipment (air handler #, accessway, etc.)
 4. Acknowledge time, date, and user who issued acknowledgement.
 5. Number of occurrences since last acknowledgement.
- J. Alarm actions may be initiated by user defined programmable objects created for that purpose.
- K. Defined users shall be given proper access to acknowledge any alarm, or specific types or classes of alarms defined by the user.
- L. A log of all alarms shall be maintained by the NAC and/or a server (if configured in the system) and shall be available for review by the user.
- M. Provide a "query" feature to allow review of specific alarms by user defined parameters.
- N. A separate log for system alerts (controller failures, network failures, etc.) shall be provided and available for review by the City of New York.
- O. An Error Log to record invalid property changes or commands shall be provided and available for review by the City of New York.
- P. The NAC shall be Honeywell WEB-301.

2.05 DATA COLLECTION AND STORAGE

- A. The NAC shall have the ability to collect data for any property of any object and store this data for future use.
- B. The data collection shall be performed by log objects, resident in the NAC that shall have, at a minimum, the following configurable properties:
1. Designating the log as interval or deviation.
 2. For interval logs, the object shall be configured for time of day, day of week and the sample collection interval.
 3. For deviation logs, the object shall be configured for the deviation of a variable to a fixed value. This value, when reached, will initiate logging of the object.
 4. For all logs, provide the ability to set the maximum number of data stores for the log and to set whether the log will stop collecting when full, or rollover the data on a first-in, first-out basis.
 5. Each log shall have the ability to have its data cleared on a time-based event or by a user-defined event or action.



- C. All log data shall be stored in a relational database in the NAC and the data shall be accessed from a server (if the system is so configured) or a standard Web browser.
- D. All log data, when accessed from a server, shall be capable of being manipulated using standard SQL statements.
- E. All log data shall be available to the City of New York in the following data formats:
 - 1. HTML
 - 2. XML
 - 3. Plain Text
 - 4. Comma or tab separated values
- F. The NAC shall have the ability to archive its log data either locally (to itself), or remotely to a server or other NAC on the network. Provide the ability to configure the following archiving properties, at a minimum:
 - 1. Archive on time of day
 - 2. Archive on user-defined number of data stores in the log (buffer size)
 - 3. Archive when log has reached it's user-defined capacity of data stores
 - 4. Provide ability to clear logs once archived.

2.06 AUDIT LOG

- A. Provide and maintain an Audit Log that tracks all activities performed on the NAC. Provide the ability to specify a buffer size for the log and the ability to archive log based on time or when the log has reached its user-defined buffer size. Provide the ability to archive the log locally (to the NAC), to another NAC on the network, or to a server. For each log entry, provide the following data:
 - 1. Time and date
 - 2. User ID
 - 3. Change or activity: i.e., Change setpoint, add or delete objects, commands, etc.

2.07 DATABASE BACKUP AND STORAGE

- A. The NAC shall have the ability to automatically backup its database. The database shall be backed up based on a user-defined time interval.
- B. Copies of the current database and, at the most recently saved database shall be stored in the NAC.



The age of the most recently saved database is dependent on the user-defined database save interval.

- C. The NAC database shall be stored, at a minimum, in XML format to allow for user viewing and editing, if desired. Other formats are acceptable as well, as long as XML format is supported.

2.08 WEB BROWSER CLIENTS

- A. The system shall be capable of supporting an unlimited number of clients using a standard Web browser such as Internet Explorer™. Systems requiring additional software (to enable a standard Web browser) to be resident on the client machine, or manufacture-specific browsers shall not be acceptable.
- B. The Web browser software shall run on any operating system and system configuration that is supported by the Web browser. Systems that require specific machine requirements in terms of processor speed, memory, etc., in order to allow the Web browser to function with the BMS, shall not be acceptable.
- C. The Web browser shall provide the same view of the system, in terms of graphics, schedules, calendars, logs, etc., and provide the same interface methodology as is provided by the Graphical user Interface. Systems that require different views or that require different means of interacting with objects such as schedules, or logs, shall not be permitted.
- D. The Web browser client shall support at a minimum, the following functions:
 - 1. User log-on identification and password shall be required. If an unauthorized user attempts access, a blank web page shall be displayed. Security using Java authentication and encryption techniques to prevent unauthorized access shall be implemented.
 - 2. Graphical screens developed for the GUI shall be the same screens used for the Web browser client. Any animated graphical objects supported by the GUI shall be supported by the Web browser interface.
 - 3. HTML programming shall not be required to display system graphics or data on a Web page. HTML editing of the Web page shall be allowed if the user desires a specific look or format.
 - 4. Storage of the graphical screens shall be in the Network Area Controller (NAC), without requiring any graphics to be stored on the client machine. Systems that require graphics storage on each client are not acceptable.



5. Real-time values displayed on a Web page shall update automatically without requiring a manual "refresh" of the Web page.
6. Users shall have administrator-defined access privileges. Depending on the access privileges assigned, the user shall be able to perform the following:
 - a. Modify common application objects, such as schedules, calendars, and set points in a graphical manner.
 1. Schedule times will be adjusted using a graphical slider, without requiring any keyboard entry from the operator.
 2. Holidays shall be set by using a graphical calendar, without requiring any keyboard entry from the operator.
 - b. Commands to start and stop binary objects shall be done by right-clicking the selected object and selecting the appropriate command from the pop-up menu. No entry of text shall be required.
 - c. View logs and charts
 - d. View and acknowledge alarms
 - e. Setup and execute SQL queries on log and archive information
7. The system shall provide the capability to specify a user's (as determined by the log-on City of New York identification) home page. Provide the ability to limit a specific user to just their defined home page. From the home page, links to other views, or pages in the system shall be possible, if allowed by the system administrator.
8. Graphic screens on the Web Browser client shall support hypertext links to other locations on the Internet or on Intranet sites, by specifying the Uniform Resource Locator (URL) for the desired link.

2.09 SYSTEM PROGRAMMING

- A. The Graphical User Interface software (GUI) shall provide the ability to perform system programming and graphic display engineering as part of a complete software package. Access to the programming functions and features of the GUI shall be through password access as assigned by the system administrator.
- B. A library of control, application, and graphic objects shall be provided to enable the creation of all applications and user interface screens. Applications are to be created by selecting the desired control



objects from the library, dragging or pasting them on the screen, and linking them together using a built in graphical connection tool. Completed applications may be stored in the library for future use. Graphical User Interface screens shall be created in the same fashion. Data for the user displays is obtained by graphically linking the user display objects to the application objects to provide "real-time" data updates. Any real-time data value or object property may be connected to display its current value on a user display. Systems requiring separate software tools or processes to create applications and user interface displays shall not be acceptable.

C. Programming Methods

1. Provide the capability to copy objects from the supplied libraries, or from a user-defined library to the user's application. Objects shall be linked by a graphical linking scheme by dragging a link from one object to another. Object links will support one-to-one, many-to-one, or one-to-many relationships. Linked objects shall maintain their connections to other objects regardless of where they are positioned on the page and shall show link identification for links to objects on other pages for easy identification. Links will vary in color depending on the type of link; i.e., internal, external, hardware, etc.
2. Configuration of each object will be done through the object's property sheet using fill-in the blank fields, list boxes, and selection buttons. Use of custom programming, scripting language, or a manufacturer-specific procedural language for configuration will not be accepted.
3. The software shall provide the ability to view the logic in a monitor mode. When on-line, the monitor mode shall provide the ability to view the logic in real time for easy diagnosis of the logic execution. When off-line (debug), the monitor mode shall allow the user to set values to inputs and monitor the logic for diagnosing execution before it is applied to the system.
4. All programming shall be done in real-time. Systems requiring the uploading, editing, and downloading of database objects shall not be allowed.
5. The system shall support object duplication within a customer's database. An application, once configured, can be copied and pasted for easy re-use and duplication. All links, other than to

the hardware, shall be maintained during duplication.

2.10 OBJECT LIBRARIES

- A. A standard library of objects shall be included for development and setup of application logic, user interface displays, system services, and communication networks.
- B. The objects in this library shall be capable of being copied and pasted into the user's database and shall be organized according to their function. In addition, the user shall have the capability to group objects created in their application and store the new instances of these objects in a user-defined library.
- C. In addition to the standard libraries specified here, the supplier of the system shall maintain an on-line accessible (over the Internet) library, available to all registered users to provide new or updated objects and applications as they are developed.
- D. All control objects shall conform to the control objects specified in the BACnet specification.

2.11 OTHER CONTROL SYSTEM HARDWARE

- A. Space Temperature Wall Module.
 - 1. Wall module shall have a 20K Ohm NTC thermistor temperature sensor with operating range of 45 to 99 F under a locking cover/enclosure with UL 916 listing designed for mounting on a standard electrical switch box.
 - 2. Space temperature sensors shall be accurate to plus or minus one F degree.
- B. Duct Mount, Pipe Mount and Outside Air Temperature Sensors: Temperature sensors with an accuracy of + 0.3° F.
 - 1. Outside air sensors shall include an integral sun shield.
 - 2. Duct sensors shall have sensor approximately in center of the duct, and shall have selectable lengths of 6, 12, and 18 inches.
 - 3. Multipoint averaging element sensors shall be provided where specified and shall have a minimum of one foot of sensor length for each square foot of duct area (provide multiple sensors if necessary).
 - 4. Pipe mount sensors shall have copper, or stainless steel separable wells.



- C. Current Sensitive Switches: Solid state, split core current switch that operates when the current level (sensed by the internal current transformer) exceeds the adjustable trip point shall be provided where specified. Current switches shall include an integral LED for indication of trip condition and a current level below trip set point.
- D. Low Temperature Limit Switches. Safety low limit shall be manual reset twenty foot limited fill type responsive to the coolest section of its length.
- E. High Temperature Limit Switches. Safety high limit (firestats) shall be manual reset type.
- F. Enthalpy Sensors. Duct mounted enthalpy sensor shall include a temperature sensor and a humidity sensor constructed to close an electrical contact upon a drop in enthalpy (total heat) to enable economizer modes of operation where specified.
- G. Actuators, General.
 - 1. All automatically controlled devices, unless specified otherwise elsewhere, shall be provided with actuators sized to operate their appropriate loads with sufficient reserve power to provide smooth modulating action or two-position action and tight close-off. Valves shall be provided with actuators suitable for floating or analog signal control as required to match the controller output. Actuators shall be power failure return type where valves or dampers are required to fail to a safe position and where specified.
- H. Temperature Control Panels: Furnish temperature control panels of code gauge steel with locking doors for mounting all devices. All electrical devices within a control panel shall be factory wired. All external wiring shall be connected to terminal strips mounted within the panel. Provide engraved phenolic nameplates identifying all devices mounted on the face of control panels. A complete set of 'as-built' control drawings (relating to the controls within that panel) shall be furnished within each control panel.

2.12 ELECTRICAL CONTROL POWER AND LOW VOLTAGE WIRING

- A. Provide interlock wiring between supply and return fans and electrical wiring for relays for temperature and pressure indication. Do not provide interlock wiring if a dedicated digital output has been specified for the equipment or the sequence of operation requires independent start/stop.
 - 1. Provide control wiring, conduit and connections for low temperature thermostats, high temperature

thermostats, alarms, flow switches, actuating devices, control devices for temperature, pressure and flow indication, and point resets for the LonWorks BMS/DDC control system. Provide all other wiring required for the complete operation of the LonWorks BMS/DDC control system. This includes but is not limited to: Where 24VAC power is not provided as an integral part of the equipment, provide control power wiring between 120 volt AC/24 volt AC power transformers to LonWorks control components requiring 24 volts power for operation. 78 Kilo Baud Twisted pair Local Operating Network wiring (TP/FTT-10).

2. Install all wiring raceway systems complying with the requirements of the National Electrical Code, and New York City Code. All corridor installations shall be installed in the Cable Tray or EMT. Provide EMT sleeves from the cable tray through the walls to above ceiling areas. Secured free air plenum rated cable is allowed to be run above the ceiling areas.

C. LonWorks Network Communication Requirements

1. Wired network communication shall be via channels consisting of a 24 AWG twisted pair installed in a 3/4" EMT or cable tray.
2. Communication conduits shall not be installed closer than six feet from high power transformers or run parallel within six feet of electrical high power cables. Care shall be taken to route the cable as far from interference generating devices as possible.
3. All shields shall be ground (earth ground) at one point only, to eliminate ground loops. This grounding shall be within the enclosure.
4. There shall be no power wiring, in excess of 30 VAC rms, run in conduit with communications wiring. In cases where signal wiring is run in conduit with communication wiring, all communication wiring and signal wiring shall be run using separate twisted shielded pairs with the shields grounded in accordance with the manufacturer's wiring practices.

B. Input/Output Signal Control Wiring.

1. RTD wiring shall be three-wire or four-wire twisted, shielded, minimum number 22 gauge.



2. Digital Input and Output wiring shall be a minimum of number 18 gauge.
3. Analog Input and Output control functions shall be a minimum of number 18 gauge, twisted, shielded.
4. Thermistors shall be equipped with the manufacturers' calibrated lead wiring. This lead wire shall not be trimmed.

E. Low Voltage (24VAC) Power Wiring

1. Low voltage (24VAC) power wiring shall be minimum two-wire twisted AWG 16-2. Provide low voltage 24V AC power to each LON controller, as required, from 110V/24VAC transformers to provide 24VAC low voltage control power. Provide the required number of transformers based on the power requirements of each LonWorks controller.
2. Low voltage power wiring that exceeds 30 VAC shall be run separate from the LON communications twisted pair (TP/FT-10) LON wiring.

F. Low Voltage (24 VAC/VDC) Power and Signal Wiring

1. Low voltage power wiring (24 VAC) shall be minimum two-conductor stranded AWG 18 and sized for the amperage required. Low voltage signal wiring (0-10 VDC) shall be minimum two-conductor stranded AWG 18 and sized for the amperage required. Low voltage wiring may be combined within one cable if acceptable to the practices of the manufacturer to which the cable is connected.

G. Control Transformers (120Volt/24VAC)

The TCC shall provide control transformers conforming to the following specifications:

1. Single-phase general purpose.
2. Dry type, two winding type, self-cooled.
3. Ratings and quantities complying with the control system requirements and in conformance to:
 - a. New York City Code Requirements
4. Manufactured and tested in accordance with the latest applicable ANSI, NEMA, and IEEE Standards. UL listed and bear the UL label.



5. Control transformers shall be designed for continuous operation at rated kVA with normal life expectancy per ANSI C57.96.
- H. Each transformer shall be over-current protected through the use of either a fuse or circuit breaker.
- Conduit and Fittings
1. Where conduit is utilized for Control Wiring, Control Cable or Transmission Cable: Electrical metallic tubing (EMT) shall be provided with compression fittings. Conduit shall be cold rolled steel, zinc coated or zinc-coated rigid steel with threaded connections.
 2. Outlet Boxes: Hot-dipped galvanized drawn steel suited to each application, in general, four inches square or octagon with suitable raised cover.
 3. Pull and Junction Boxes: Size according to number, size, and position of entering raceway as required by National Electrical Codes. Enclosure type shall be suited to location.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. All work described in this section shall be performed by system integrators or contractors that have a successful history in the design and installation of integrated control systems. The installing office shall have a minimum of three years of integration experience and shall provide documentation verifying the company's experience.
- B. Install system and materials in accordance with manufacturer's instructions, and as detailed on the project drawing set.
- C. Drawings of the TCS and BMS network are diagrammatic only and any apparatus not shown, but required to make the system operative to the complete satisfaction of the Commissioner shall be furnished and installed without additional cost.
- D. Line and low voltage electrical connections to control equipment shown specified or shown on the control diagrams shall be furnished and installed by this contractor in accordance with these specifications.
- E. Equipment furnished by the HVAC Contractor that is normally wired before installation shall be furnished completely wired. Control wiring normally performed in



the field will be furnished and installed by this contractor.

3.02 WIRING

- A. All low voltage electrical control wiring to the control panels, NAC, computers and network components shall be the responsibility of this contractor.
- B. The contractor shall furnish all power wiring to control panels, electrical starters and motors.

3.03 WARRANTY

- A. Equipment, materials and workmanship incorporated into the work shall be warranted for a period of one (1) year from the time of system acceptance.
- B. Within this period, upon notice by the City of New York, any defects in the work provided under this section due to faulty materials, methods of installation or workmanship shall be promptly (within 48 hours after receipt of notice) repaired or replaced by this contractor at no expense to the City of New York.

3.04 WARRANTY ACCESS

- A. The City of New York shall grant to this contractor, reasonable access to the TCS and BMS during the warranty period.
- B. The City of New York shall allow the contractor to access the TCS and BMS from a remote location for the purpose of diagnostics and troubleshooting, via the Internet, during the warranty period.

3.05 ACCEPTANCE TESTING

- A. Upon completion of the installation, this contractor shall load all system software and start-up the system. This contractor shall perform all necessary calibration, testing and de-bugging and perform all required operational checks to insure that the system is functioning in full accordance with these specifications.
- B. This contractor shall perform tests to verify proper performance of components, routines, and points. Repeat tests until proper performance results. This testing shall include a point-by-point log to validate 100% of the input and output points of the DDC system operation.



- C. Upon completion of the performance tests described above, repeat these tests, point by point as described in the validation log above in presence of Commissioner, as required. Properly schedule these tests so testing is complete at a time directed by the Commissioner.
- D. System Acceptance: Satisfactory completion is when this contractor and the contractor have performed successfully all the required testing to show performance compliance with the requirements of the Contract Documents to the satisfaction of the Commissioner. System acceptance shall be contingent upon completion and review of all corrected deficiencies.

3.06 OPERATOR INSTRUCTION, INSTRUCTION

- A. During system commissioning and at such time acceptable performance of the TCS and BMS hardware and software has been established this contractor shall provide on-site operator instruction to the City of New York operating personnel. Operator instruction shall be done during normal working hours and shall be performed by a competent representative familiar with the system hardware, software and accessories.
- B. This contractor shall provide 40 hours of instruction to the City of New York designated personnel on the operation of the TCS and BMS and describe its intended use with respect to the programmed functions specified. Operator orientation of the systems shall include, but not be limited to; the overall operation program, equipment functions (both individually and as part of the total integrated system), commands, systems generation, advisories, and appropriate operator intervention required in responding to the System's operation.
- C. The instruction shall be in three sessions as follows:
 - 1. Initial Instruction: One day session (8 hours) after system is started up and at least one week before first acceptance test. Manual shall have been submitted at least two weeks prior to instruction so that the City of New York personnel can start to familiarize themselves with the system before classroom instruction begins.
 - 2. First Follow-Up Instruction: Two days (16 hours total) approximately two weeks after initial instruction, and before Formal Acceptance. These sessions will deal with more advanced topics and answer questions.



3. Warranty Follow Up: Two days (16 hours total) in no less than 4 hour increments, to be scheduled at the request of the City of New York during the one year warranty period. These sessions shall cover topics as requested by the City of New York such as; how to add additional points, create and gather data for trends, graphic screen generation or modification of control routines.

PART 4 - POINTS LIST

4.01 CONSTANT VOLUME AIR HANDLING UNIT (AHU-1) AND CONDENSING UNIT (CU-1)

- A. Supply Fan
 1. Start/Stop and Status (DO/DI)
- B. Return Fan
 1. Start/Stop and Status (DO/DI)
- C. Damper Control
 1. Outdoor Air Damper
 2. Return Air Damper
 3. Spill Air Damper
 4. Outdoor Air Temperature
 5. Mixed Air Temperature
- D. Cooling Coil
 1. DX Coil Stages
- F. Discharge Air Temperature
- G. Space Air Temperature
- H. Air Filter Pressure Drop (AI)
- I. Smoke Detector (DI each detector)
- J. Condensing Unit
 1. Compressor #1 Start/Stop and Status
 2. Compressor #2 Start/Stop and Status

4.02 CONSTANT VOLUME DX COOLING ROOFTOP UNITS (RTU-2 TO RTU-5)

- A. Supply Fan
 1. Start/Stop and Status (DO/DI)
- B. Exhaust Fan
 1. Start/Stop and Status (DO/DI)
- C. Damper Control



1. Outdoor Air Damper (AO)
 2. Return Air Damper (AO)
 3. Exhaust Air Damper (AO)
 4. Outdoor Air Temperature (AI)
 5. Mixed Air Temperature (AI)
- D. Cooling Coil
1. DX Coil Stages (BO each stage)
- F. Discharge Air Temperature (AO)
- G. Space Air Temperature (AI)
- H. Air Filter Pressure Drop (AI)
- I. Smoke Detector (DI each detector)
- J. Condenser:
1. Compressor #1 Start/Stop and Status
 2. Compressor #2 Start/Stop and Status

4.03 CABINET HEATER

- A. Supply Fan: - Start/Stop and Status (DO/DI)
- B. Fresh Air Intake Damper: - Open/Closed and Status
- C. Space CO₂ Sensor: - High concentration threshold limit.

4.04 EXISTING BOILER AND PUMPS (N.I.C)

- A. Sensor point list should be as existing. See drawing M-006.00 for a suggested control point schematic diagram. Integrate Boiler operation and associated hot water circulation pumps to the BMS, and include boiler sequence of operation and boiler alarm points as needed.

END OF SECTION 230923



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 230993
SEQUENCE OF OPERATION

PART 1 - GENERAL

1.1. DESCRIPTION OF WORK

- A. The sequence of operation is hereby defined as the written manner and method by which HVAC systems and other building systems and equipment operate. This description includes automatic and manual control functions and includes operation(s), which are monitored, observed, trended, etc. and otherwise used to make decisions regarding system operation.
- B. Operating equipment, devices, and system components required for control systems are also specified in other Division 23 Sections. Specific requirements for each type of control system operation are specified in Section 230501, Basic HVAC Requirements, and this section and are included by specific reference.
- C. Adjustability of Settings: Declarations within the specifications of setpoints, differentials, times, alarm settings, and all other such settings are hereby understood to be field adjustable. Setting provided are intended as an initial operating condition for system startup and configuration unless otherwise noted. Final settings determined in conjunction with other trades, such as the Test & Air Balancing Contractor, and during system startup and calibration shall be included in final system backed-up, sequence of operations and included in the owner's manual and close-out documentation.

1.2 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.3 SUPPLEMENTAL SUBMITTALS

- A. Sequence of Operation: Submit Shop Drawings for each of the systems being controlled shall include a written sequence of operation as it appears in these specifications.

PART 2 - PRODUCTS

Not applicable to this section.



PART 3 - EXECUTION

3.1 AIR HANDLING/CONDENSING UNITS CONTROL SEQUENCES

A. Safety Controls for Air Handling Units:

1. Provide low-limit controller to prevent mixed air from falling below 45°F.
2. A hard-wired interlocked supply high discharge switch shall stop the supply and return fans when duct pressure exceeds design value. The fans shall remain off until the pressure switches are reset. An alarm condition will be sent to the BMS.
3. All duct mounted automatic control instruments shall be mounted on the exterior surface of the insulation, on suitable metal saddles. Provide appropriate extension mountings for control devices to clear insulation.

B. Fire Alarm Shut-Down: This sequence of operation shall be in force at all times and under all modes of operation.

1. The Fire Alarm contractor shall furnish and the mechanical contractor shall install the smoke detector(s) to shut down the system upon sensing smoke.
2. During a fire alarm condition, the Fire Alarm Control Panel (FACP) shall shut down the supply and return fans and the system shall operate and remain in the System-OFF Mode until the alarm condition is cleared.
3. Fire alarm system activation initiated by manual pull station shall not shut down the unit supply and exhaust fans.

C. Operating Modes. The operating modes of the AHU shall be automatically determined by the combined actions of the DDC Scheduler, control and safety devices and the Fire Alarm System.

1. Mode Selection and Fan Operation:

- a. **Summer/Winter Mode Selection and Economizer Mode Selection:** The air handling unit shall be automatically indexed to operate in either the Summer Mode or Winter Mode based on the outside ambient temperature. If the outside temperature is less than or equal to 55 F, the unit shall be indexed to the Winter Heating



Mode and the heating valve shall be modulated.

If the outside temperature is greater than 55 F but less than 60 F, the unit shall be in whatever Mode was the last Mode of operation (heating or cooling). If the outside temperature is greater than or equal to 60 F but less than 65F, the unit shall be indexed to the Summer Cooling Mode and may or may not be in the Economizer Mode depending on the enthalpy of the outside air as compared to the enthalpy of the return air. The Mode shall be determined by comparison of the controller's calculated return air enthalpy to the calculated global outside air enthalpy.

- b. When the outside air enthalpy is less than the return enthalpy the air handling unit shall be indexed to the Economizer Mode. When the outside air enthalpy is greater than the return enthalpy, the air handling unit shall be indexed to Summer Cooling Mode. If the outside temperature is greater than or equal to 65F, the unit shall be indexed to the Summer Cooling.
- c. Upon a Lon Network communication failure, the air handling unit shall default to the seasonal Occupied Mode.

D. Sequence of Operation:

1. System-OFF:

- a. When the AHU is OFF, the outside air dampers shall be closed, the fans shall be OFF, and all heating and cooling shall be de-energized.

2. Summer (Cooling) Mode:

a. Occupied Cycle:

- 1) The supply fan and interlocked return fan are commanded ON and run continuously subject to all safeties.
- 2) The outdoor and exhaust air dampers are opened to their minimum ventilation position, and the recirculation damper is fully open.
- 3) Mechanical DX cooling coil, and associated condensing unit, shall be controlled in stages and sequenced so as to maintain the space temperature at set-point, usually 78°F (adjustable).



- 4) Demand controlled ventilation: For unit installation with CO2 sensor and demand control ventilation module outside and return air damper position shall be modulated by CO2 sensor output signal.

b. Unoccupied Cycle:

- 1) Outdoor and exhaust air dampers at AHU are fully closed, and the recirculation air damper is fully open.
- 2) Supply and return air fans are off, and the associated condensing unit is de-energized.
- 3) The supply and return air fan, as well as the associated condensing unit shall turn ON when the high limit of the space air temperature is reached, usually 85 °F (adjustable), and the system shall sequence so as to maintain the space at the high limit set-point for the unoccupied cycle.
- 4) The system shall turn OFF when the space temperature is two degrees below the space high limit for unoccupied cycle, usually 85 °F (adjustable).

3. Winter (Heating) Mode:

a. Occupied Cycle:

- 1) The supply fan and interlocked return fan are commanded ON and run continuously subject to all safeties.
- 2) The outdoor and exhaust air dampers are opened to their minimum ventilation position, and the recirculation damper is fully open.
- 3) Heating coil shall be controlled and sequenced by cycling the associated hot water control valve to maintain the space temperature at set-point, usually 68°F (adjustable).
- 4) When any heating control valve of the heating system cycles to the OPEN position, the hot water circulation pumps shall turn ON, in accordance with their control sequence.
- 5) Demand controlled ventilation: For unit installation with CO2 sensor and demand control ventilation module outside and return air damper position shall be modulated by CO2 sensor output signal.



b. Unoccupied Cycle:

- 1) Outdoor and exhaust air dampers at AHU are fully closed, and the recirculation air damper is fully open.
- 2) Supply and return air fans are off, and the associated condensing unit is de-energized.
- 3) The supply and return air fans, as well as the hot water system circulation pumps, and the hot water control valve at heating coil, will cycle ON and OFF to maintain the space temperature at the night setback temperature setup point, usually 55 °F (adjustable).

4. Economizer Mode:

- a. The enthalpy based controller determines the activation of the economizer mode. Two (2) enthalpy sensors compare total heat content of the indoor air and outdoor air to determine the most efficient air source. The Outdoor Air Damper will modulate between the adjustable minimum position and full open to maintain space temperature at the Economizer set point.
- b. The Outdoor Air Damper, Exhaust Air Damper and Recirculation Damper operate simultaneously and interlocked, from fully closed to fully open as follows:
 - 1) When Outdoor Air Damper is fully open, the Exhaust Air Damper is fully open and the Recirculation Damper is fully closed.
 - 2) When Outdoor Air Damper is fully closed, the Exhaust Air Damper is fully closed and the Recirculation Damper is fully open.
 - 3) For any other intermediate position, the Exhaust Air Damper and Recirculation Damper will modulate inversely proportional to each other's position following any modulation of the Outdoor Air Damper above to minimum outdoor air position.
- c. The Outdoor Air Damper will be set to its adjustable minimum position if the Economizer function is disabled or if the Discharge Temperature Sensor has failed. If the unit is in the preoccupancy mode, the Supply Fan is OFF or the Mixed Air Temperature Sensor has



failed, the Outdoor Air Damper will be closed.

- d. Economizer mode shall be correlated with the occupied mode only, and shall be disabled in unoccupied mode.

3.2 ROOFTOP CONSTANT-VOLUME AC UNIT WITH ECONOMIZER DAMPERS, DX COOLING, AND DDC CONTROLS

A. Safety Controls:

1. Provide low-limit control to prevent mixed air from falling below 45°F.
2. The unit and its components are subject to other OEM safety devices. Refer to unit specification sections.
3. Safety Emergency Heating Mode: A furnace control Hand-Off-Auto toggle selector switch shall be utilized as follows. In the "Auto" position, the furnace shall be controlled in the automatic modes as defined herein. In the "Off" position, the furnace shall be disabled. In the "Hand" position, the units' DDC furnace operating controls shall be overridden and the furnace started and ramped up to the full heat output capacity. In all modes, the furnace operation shall be subject to all safety devices including but not limited to the manufacturer's high temperature cut-out safety and a unit airflow proving switch.

B. Fire Alarm Shut Down: This sequence of operation shall be in force at all times and under all modes of operation.

1. The Fire Alarm contractor shall furnish and the mechanical contractor shall install the smoke detector(s) to shut down the system upon sensing smoke (if not already provided).
2. During a fire alarm condition, the Fire Alarm Control Panel (FACP) shall shut down the supply and electrically interlocked return fan and the system shall operate and remain in the System-OFF Mode until the alarm condition is cleared. When the unit fans are shut down by a fire alarm condition, all fire/smoke and smoke dampers shall close as commanded by the FACP. After the fire alarm shutdown is cleared, all smoke and fire/smoke dampers shall be commanded open by the FACP and the unit shall resume its normal



operation according to the appropriate mode.

3. Fire alarm system activation initiated by manual pull station shall not shut down the unit supply and return fans and shall not close the associated smoke and/or fire/smoke dampers if in the testing mode.

C. Operating Modes. The operating modes of the RTU shall be automatically determined by the combined actions of the DDC Scheduler, control and safety devices and the Fire Alarm System.

1. Mode Selection and Fan Operation:

a. The operator shall be able to manually select the operating mode through an H-O-A switch mounted in the RTU and wired into the digital controller. In the automatic-position the RTU is indexed automatically by the DDC Scheduler between the various modes of operation described herein. In the H-position the RTU shall remain in the Occupied Mode. In the O-position the RTU shall remain in the Unoccupied Mode.

b. Summer/Winter Mode Selection and Economizer Mode Selection: The rooftop unit shall be automatically indexed to operate in either the Summer Mode or Winter Mode based on the outside ambient temperature.

1. Winter Mode: If the outside temperature is less than or equal to 55 F, the unit shall be de-energised.

2. If the outside temperature is greater than 55°F but less than 60°F, the unit shall be in whatever Mode was the last Mode of operation (off or cooling).

3. Summer Mode: If the outside temperature is greater than or equal to 60°F but less than 65°F, the unit shall be indexed to the Summer Cooling Mode.

4. Economizer Mode: When the calculated global outside air enthalpy is less than the controller's calculated return air enthalpy, the rooftop unit shall be indexed to the Economizer Mode. When the outside air enthalpy is greater than the return enthalpy, the rooftop unit shall be indexed to Summer Mechanical Cooling Mode. If the outside temperature is greater than or equal to 65F, the unit



shall be indexed to the Mechanical Cooling Mode. Upon a Lon Network communication failure, the rooftop unit shall default to the seasonal Occupied Mode.

D. Sequence of Operation:

1. System-OFF:

a. When the RTU is OFF, the outside air and exhaust dampers shall be closed, the fans shall be OFF, and all heating and cooling mode operations shall be de-energized.

2. Summer (Cooling) Mode:

a. Occupied Cycle:

- 1) The supply fan is commanded ON and run continuously subject to all safeties. The exhaust fan is OFF.
- 2) The outdoor air damper is opened to its minimum ventilation position, and the exhaust damper is closed.
- 3) Mechanical DX cooling coil, and associated compressors, shall be controlled in stages and sequenced so as to maintain the space temperature at set-point, usually 78°F (adjustable).
- 4) Demand controlled ventilation: For unit installation with CO2 sensor and demand control ventilation module outside air damper position shall be modulated by CO2 sensor output signal.
- 5) When the space pressurization sensor reaches space limits, usually 0.05" w.g. (adjustable), the exhaust fan shall turn ON, and the exhaust damper shall open to its minimum position. The exhaust fan shall turn OFF, and the exhaust damper shall close when space pressurization sensor drop below setup point.

b. Unoccupied Cycle:

- 1) Outdoor and exhaust air dampers at RTU are fully closed.
- 2) Supply air fan is OFF, exhaust fan is OFF and the associated compressors and condenser fan are de-energized.



- 3) The supply air fan, as well as the associated compressors shall be energized when the high limit of the space air temperature is reached, usually 85 °F (adjustable), and the system shall sequence so as to maintain the space at the high limit set-point for the unoccupied cycle.
 - 4) The system shall turn OFF when the space temperature is two degrees below the space high limit for unoccupied cycle, usually 85 °F (adjustable).
3. Winter Mode:
- a. Occupied or Unoccupied Cycle:
 - 1) The unit remains in the System-OFF condition.
 - 2) The outside air intake and exhaust dampers shall be fully closed at all times.
4. Economizer Mode:
- a. The enthalpy controller determines the activation of the economizer mode. The enthalpy sensors compare total heat content of the indoor air and outdoor air to determine the most efficient air source. The Outdoor Air Damper will modulate between the adjustable minimum position and full open to maintain space temperature at the Economizer set point.
 - b. The Outdoor Air Damper, Exhaust Air Damper and Recirculation Damper operate simultaneously and interlocked, from fully closed to fully open as follows:
 - 1) When Outdoor Air Damper is fully open, the Exhaust Air Damper is fully open and the Recirculation Damper is fully closed.
 - 2) When Outdoor Air Damper is fully closed, the Exhaust Air Damper is fully closed and the Recirculation Damper is fully open.
 - 3) For any other intermediate position of the Outdoor Air Damper, the Exhaust Air Damper and Recirculation Damper will modulate inversely proportional to each other's position following any modulation of the Outdoor Air Damper above to minimum outdoor air position.



- c. The Outdoor Air Damper will be set to its adjustable minimum position if the Economizer function is disabled or if the Discharge Temperature Sensor has failed.
- d. Economizer mode shall be correlated with the occupied mode only, and shall be disabled in unoccupied mode.

3.3 CABINET HEATER WITH FRESH AIR INTAKE DAMPER

A. Safety Controls:

- 1. Provide low-limit control to prevent mixed air from falling below 45°F.

B. Operation Mode: Cabinet Heater operates only in heating mode. During the cooling mode the fresh air damper shall be fully closed, and unit is de-energized (fan OFF):

C. Sequence of Operations:

1. Winter (Heating) Mode:

a. Occupied Cycle:

- 1) Cabinet heater fan shall be ON all the time.
- 2) Hot water control valve shall cycle open/close to maintain space temperature at setpoint, or to maintain a minimum supply air at 2 gdegrees above space temperature.
- 3) When space CO₂ concentration sensor reaches the high limit level, fresh air damper shall open.
- 4) When mixed air temperature fall below 45 °F, fresh air damper shall close.

b. Unoccupied Cycle:

- 1) Fresh air damper shall be closed.
- 2) Control valve shall cycle open/closed to maintain space temperature at the night setback setpoint.
- 3) The cabinet supply fan shall cycle in concert with the control valve (ON when valve is open, and PFF when valve is closed).

3.4 AIR- HANDLING UNIT AND AIR COOLED CONDENSER (CLASON'S POINT)



A. For sequence of operation see drawing M-006.

3.5 PUMPS (CLASON'S POINT BRANCH LIBRARY)

A. Pumps operation shall be interlocked with existing boiler operation as per existing procedure of boiler control sequencing.

3.6 BOILER (FRANCIS MARTIN BRANCH LIBRARY)

A. Existing boiler and associated circulating hot water pumps sequence of operations shall be integrated to BMS accordingly.

END OF SECTION 230993



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 232003
THERMOMETERS AND GAUGES

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide all types of thermometers and gauges as shown on the Drawings, as referred to by each Division-23 Section (HVAC), and as needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements shall be referred to for general requirements.
- B. Thermometers and gauges provided as part of factory-fabricated equipment are specified as part of the equipment assembly in other Division-23 Sections.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data shall include calibrated performance curves.
- B. Schedule for thermometers and gages indicating manufacturer's number, scale range, and location for each.
- C. Operation and Maintenance manuals.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards
 - 1. UL Compliance: comply with applicable UL standards pertaining to gauges.
 - 2. ANSI and ISA Compliance: comply with applicable portions of ANSI and Instrument Society of America (ISA) standards pertaining to construction and installation of thermometers and gauges.



3. American Society of Mechanical Engineers (ASME):
ASME B40.200, Thermometers, Direct Reading and
Remote Reading; ASME B40.100, Pressure Gauges and
Gauge Attachments.

PART 2 - PRODUCTS

2.01 MATERIALS AND MANUFACTURERS

A. Glass Thermometer:

1. Provide fabricated from materials, and with capacities and ranges, designed and constructed for use in service.
 - a. Case: die cast aluminum finished in baked epoxy enamel or powder coated, glass front, 9" long.
 - b. Adjustable Joint: die cast aluminum, finished to match case, 180° adjustment in vertical plane, 360° adjustment in horizontal plane, with locking device.
 - c. Tube and Capillary: non-toxic liquid filled, with magnifying lens, 1% scale range accuracy, shock mounted.
 - d. Scale: non-reflective aluminum with permanently etched markings. The scale shall be V-shaped for optimum readability.
 - e. Stem: copper-plated steel, brass, or aluminum for separable socket or installation in mounting bracket and of length to suit installation.
 - 1) Design for Air-Duct Installation: With ventilated shroud.
 - 2) Design for Thermowell Installation: Bare stem.
 - f. Connector: 1-1/4", with ASME B1.1 screw threads.
 - g. Range: conform to the following:
 - 1) Hot Water: 30° F. - 240° F



2) Duct: 30° F - 180° F

2. Approved Manufacturers:

- a. Miljoco Corporation
- b. Marsh Bellofram
- c. Trerice (H.O.) Co.
- d. Weiss Instruments, Inc.
- e. Weksler Instruments
- f. Or approved equal.

B. Dial Type Insertion Thermometers:

1. Provide fabricated from materials, with capacities and ranges, designed and constructed for use in service.

a. Type: bi-metal, stainless steel case and stem, 5" diameter dial, dust and leak proof, of stem diameter and length to suit installation.

b. Accuracy: +1% of dial range.

c. Range: conform to the following:

1) Hot Water: 30° F. - 240° F.

2) Duct: 30° F. - 180° F.

2. Approved Manufacturers:

- a. Miljoco Corporation
- b. Marsh Bellofram
- c. Taylor Instrument Co.
- d. Trerice (H.O.) Co.
- e. Weiss Instruments, Inc.
- f. Weksler Instruments
- g. Or approved equal.

C. Thermometer Wells

1. Provide thermometer wells constructed of brass or stainless steel, pressure rated to match piping system design pressure; length as required to hold thermometer with a 2" extension for insulated piping. Provide cap nut with chain fastened permanently to thermometer well.

2. Manufacturer: same as thermometers.



D. Duct-Thermometer Mounting Brackets: Flanged bracket with screw holes, for attachment to air duct and made to hold thermometer stem.

E. Pressure Gauges:

1. Provide pressure gauges of materials, capacities and ranges, designed and constructed for use in service as required.

a. Type: General use, 1% accuracy, ANSI B40.1 grade A, bronze bourdon type, bottom connection unless otherwise indicated.

b. Case: drawn steel or brass, cast aluminum, shatterproof glass lens, 4-1/2" diameter.

c. Connector: brass with 1/4" male NPT. Provide protective syphon when used for steam service.

d. Scale: white coated aluminum, with permanently etched markings.

e. Range: conform to the following:

1) Water: 0 - 200 psi.

2. Approved Manufacturers:

a. Ametek/U.S. Gauge.

b. Ernst Flow Industries.

c. Marsh Bellofram

d. Miljoco Corporation.

e. Trerice (H.O.) Co.

f. Weiss Instruments, Inc.

g. Weksler Instruments

h. Or approved equal.

F. Pressure Gauge Cocks:

1. Provide pressure gauge cocks between pressure gauges and gauge tees on piping systems. Construct gauge cock of brass with 1/4" female NPT on each end, and "T" handle brass plug.

a. Syphon: 1/4" straight coil constructed of brass tubing or loop-shaped section of brass,



stainless-steel or steel pipe with 1/4" male NPT on each end.

- b. Snubber: 1/4" brass bushing with corrosion resistant porous metal disc, through which pressure fluid is filtered. Select disc material for fluid served and pressure rating. Include extension for use on insulated piping.

2. Manufacturer: same as for pressure gauges.

G. Pressure and/or Temperature Gauge Connector Plugs:

1. Provide gauge connector plugs rated for 500 psi at 200° F. Construct of brass and finish in nickel-plate equip with 1/4" or 1/2" NPS fitting, with self-sealing valve core type neoprene gasketed orifice suitable for inserting 1/8" OD probe assembly from dial type insertion pressure and/or temperature gauge. Equip orifice with gasketed screw cap and chain. Provide extension, length equal to insulation thickness, for insulated piping.
2. Approved Manufacturers:
 1. Miljoco Corporation.
 2. MG Piping Products Co.
 3. Peterson Equipment Co.
 4. Sisco, A Spedco, Inc. Co.
 5. Trerice (H.O.) Co.
 6. Watts Regulator Co.
 7. Or approved equal.

PART 3 - SUPPLEMENTAL EXECUTION

3.01 INSTALLATION

A. Temperature Gauges

1. Install temperature gauges in accordance with the manufacturer's printed installation instructions, in vertical upright position and tilted so as to be easily read by observer standing on the floor. Each thermometer shall have an isolation shutoff valve for service and removal. Install direct-mounted thermometers in thermowells.
 - a. Thermometers for Sensing Liquid Temperature: provide with separable sockets. Sockets for



use in insulated piping, insulated tanks or similar equipment shall have extension lagging neck type, of length as required to compensate for insulation thickness, and proper immersion.

- b. Duct Thermometer Support Flanges: install in wall of duct where duct thermometers are required or indicated on the Drawings. Attach to duct with screws.
2. Locations: install in the following locations, and elsewhere as indicated on the Drawings:
 - a. At inlet and outlet of boiler
 - b. At inlet and outlet of hot water coil in air handling unit
 - c. At outside-air, return-air, and mixed-air ducts

B. Pressure Gauges

1. Install pressure gauges in accordance with the manufacturer's printed installation instructions, in piping tee with pressure gauge cock, located on pipe at most readable position.
2. Locations: install in the following locations, and elsewhere as indicated on the Drawings:
 - a. At suction and discharge of each pump
 - b. At discharge of each pressure reducing valve
 - c. At duct as shown on the Drawings
3. Pressure Gauge Cocks: install in piping tee with snubber. Install syphon for steam pressure gauges.

3.02 ADJUSTING AND CLEANING

- A. Adjusting: adjust faces of gauges to proper angle for best visibility.
- B. Cleaning: clean windows of thermometers and gauges and factory-finished surfaces. Replace cracked or broken windows; repair any scratched or marred surfaces with manufacturer's touch-up paint.

END OF SECTION 232003



SECTION 232116
HYDRONIC SPECIALTIES

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide hydronic specialties specified herein, shown on the Drawing Schedules and needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements, shall be referred to for general requirements. The types of hydronic specialties specified in this Section include: manual balancing valves, pump discharge check valves, pressure reducing valves.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Include flow and pressure drop curve or chart for each type and size of hydronic specialty. For the Water Flow Control Valve and Balancing Valves, incorporate a calibrated chart and the computed flow rates based on the equipment actually installed; these rates shall be indicated on a flow diagram, which shall be submitted for approval.
- B. Maintenance data.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards: ASME Compliance: Manufacture and install hydronic specialties in accordance with ASME B31.9: Building Services Piping.

PART 2 - PRODUCTS

2.01 MATERIALS AND MANUFACTURERS



- A. Provide factory-fabricated hydronic specialties recommended by the manufacturer for use in service indicated. Provide sizes and connections that properly mate with pipe, tube and equipment connections.
- B. Balancing Valves with Read-out Ports
 1. Where the Drawings indicate a balancing valve in the water piping, provide a combination shut-off and balancing valve with read-out ports of heavy brass construction up to 2" and of cast-iron construction 2-1/2" and above, with visible graduated dial indicator and read-out ports built for a working water pressure of .250 psig at 250° F. Valve shall be globe or ball type. Valve shall be complete with a locking mechanism that can be set at a balance point, so that the valve may be opened and closed, but not opened beyond the pre-set balance point.
 2. Manufacturers:
 - a. Armstrong Pumps, Inc.
 - b. Bell & Gossett ITT; Fluid Handling Div.
 - c. Griswold Controls
 - d. Or approved Equal
- C. Air Vents
 1. Manual Air Vent shall consist of a 1/4" bronze pet cock with lever handle, fitted into a pipe tee.
 2. Automatic Air Vent: Provide automatic air vent designed to vent automatically with float principle, stainless steel or non-ferrous float and mechanisms, cast-iron or brass body, pressure rated for 125 psi, 1/2" NPS inlet and outlet connections if required. (Sarco Co. Type 13W, Spirotherm, Inc. Spirotop)
 3. Manufacturers:
 - a. Armstrong Pumps, Inc.
 - b. Bell & Gossett ITT: Fluid Handling Div.
 - c. Crane Co.
 - d. Or Approved Equal
- D. Flow Control Valves (Check Valves)
 1. Provide flow control valves pressure rated for 125 psi, containing lift check assembly which will automatically open by means of pump flow pressure,



and automatically close when pump is not operating. Provide with means to manually open in case of pump failure.

- a. Threaded Ends 2-1/2" and Smaller: cast-iron body, bronze check mechanism, screw-in bonnet, straight or angle pattern.
- b. Soldered Ends 4" and Smaller: cast-bronze body, bronze check mechanism, screw-in bonnet, straight or angle pattern.
- c. Flanged Ends 3" and Larger: cast-iron body, bronze check mechanism, screw-in bonnet, straight or angle pattern.

2. Manufacturers:

- a. Armstrong Pumps, Inc.
- b. Bell & Gossett ITT; Fluid Handling Div.
- c. MEPCO (Dunham-Bush, Inc).
- d. Or approved equal

E. Pump Discharge Check Valves

1. Provide non-slam check valve with spring-loaded disc and calibrated adjustment feature permitting regulation of pump discharge flow and shutoff. Design valves to permit repacking under full line pressure, and with bolt-on bonnet. Provide flanged cast-iron valve body, pressure rated for 175 psi, maximum operating temperature of 300° F. Provide straight or angle pattern.

2. Manufacturers:

- a. Amtrol, Inc.
- b. Armstrong Pumps, Inc.
- c. Bell & Gossett ITT; Fluid Handling Div.
- d. Taco, Inc.
- e. Wheatley HVAC Products.
- f. Or approved equal.

F. Pressure Reducing Valves

1. Where shown on the Drawings, provide in the make-up water supply line, an iron body pressure reducing valve with brass internal parts. Reducing valve shall be provided with a strainer and a check valve to prevent back flow of water when city water pressure is less than the system pressure. Valve setting shall be as indicated on the Drawings



2. Manufacturers:

- a. Amtrol, Inc.
- b. Armstrong Pumps, Inc.
- c. Bell & Gossett ITT; Fluid Handling Div.
- d. Taco, Inc.
- e. Wheatley HVAC Products
- f. Conbraco Industries, Inc.
- g. Or approved equal

PART 3 - EXECUTION

3.01 SUPPLEMENTAL INSTALLATION

- A. Balancing Valves: Install balancing valves where shown on the Drawings. After hydronic system balancing has been completed, mark each balancing valve with stripe of yellow lacquer across body and stop plate to permanently mark final balanced position. (Refer to Section 230594 Balancing of Systems)
- B. Air Vent
 1. Manual Air Vent: Install manual air vent on each hydronic terminal at highest point, and on each hydronic piping drop in direction of flow for mains, branches, and runouts, and elsewhere as indicated on the Drawings.
 2. Automatic Air Vent: Install automatic air vent at top of each hydronic riser and elsewhere as indicated on the Drawings. Install shutoff valve between riser and air vent; pipe outlet to suitable plumbing drain, or as indicated on the Drawings.
- C. Flow Control Check Valves: Install flow control valves on discharge of each pump servicing hydronic system or zone, and elsewhere as indicated on the Drawings. Install with check mechanism in upright position, with adequate clearance of service and replacement. Screw check down for automatic operation.
- D. Pump Discharge Valves: As indicated on the Drawings, install pump discharge valves on each pump discharge line in lieu of separate shutoff valve and check valve. Install in horizontal or vertical position with stem in upward position; allow clearance above stem for check mechanism removal. After hydronic system has been completed, mark calibrated name plate with stripe of



yellow lacquer to permanently mark final balanced position.

- E. Pressure Reducing Valves: Install where indicated on the Drawings, and in accordance with manufacturer's installation instructions.
- F. Manual Water Flow Rate Control: Install at each location as shown on the Drawings. For pipe sizes over 3", Insert shall be installed with gaskets between standard ASA pipe flanges. A globe valve furnished with square operating nut shall be provided in the piping on the discharge side of the insert at a minimum distance of 12".

END OF SECTION 232116



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 232123
HYDRONIC PUMPS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide centrifugal HVAC pumps, called for in drawing schedule, and as needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501 shall be referred to for general requirements. The types of pumps specified in this section include the following: In-line Circulating pumps.

1.02 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Submit current accurate pump characteristic performance curves with selection points clearly indicated.
- B. Shop Drawings: Schedule: Pump schedule showing pump specifications, application, layout and connections.
- C. Wiring Diagrams: Submit manufacturer's electrical requirements for the power supply wiring. Power supply wiring shall be provided by the Division 26 Electrical Contractor. Submit manufacturer's wiring diagrams for interlock and control wiring. Clearly differentiate between portions of wiring that are factory installed and portions to be field installed by the Temperature Control System Contractor.
- D. Provide a set of manufacturer's guarantees for all equipment supplied.
- E. Maintenance data.
- F. Videotapes produced during the instruction.
- G. Certificate: Contractor's start-up and demonstration affidavit.

1.04 SUPPLEMENTAL QUALITY ASSURANCE



A. Codes and Standards

1. HI Compliance: Design, manufacture and install HVAC pumps in accordance with HI: Hydraulic Institute Standards.
2. UL Compliance: Design, manufacture and install HVAC pumps in accordance with UL 778: Motor Operated Water Pumps.
3. All appliances regulated by the New York City Construction Codes shall be listed and labeled (reference MC 301.4, MC 301.6). Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.

B. Supply nameplate data on pumps and drives.

C. Before submitting any equipment shop drawings for approval, the HVAC Contractor, Automatic Temperature Controls Contractor and the Equipment Vendor and Manufacturer shall coordinate the controls required for the system.

1.05 WARRANTY

A. Pumps manufacturer's warranty shall be for five years. The guarantee period start date shall be the date of Substantial Completion.

PART 2 - PRODUCTS

2.01 MATERIALS AND MANUFACTURERS

A. Pumps of the same type shall be manufactured by the same manufacturer.

B. In-Line Circulating Pumps

1. Provide in accordance with the following:



- a. Type: Horizontal mount, vertical split case, oil-lubricated, designed for 125 psi working pressure and 225°F continuous water temperature.
- b. Body: Cast iron, with suction and discharge gage tapings.
- c. Shaft: Manufacturer to specify type of hardened alloy steel.
- d. Bearings: Oil-lubricated bronze ball bearings with an oil level indicator.
- e. Seal: Mechanical, with carbon seal ring and ceramic seat.
- f. Motor: Non-overloading at any point on pump curve, open, drip-proof, oil-lubricated ball bearings, resilient mounted construction, built-in thermal overload protection on single phase motors.
- g. Coupling: Self-aligning flexible coupling.
- h. Impeller: Enclosed type, hydraulically and dynamically balanced, and keyed to shaft.

2. Approved Manufacturers:

- a. Allied Pump Corporation
- b. Amtrol Inc.
- c. Armstrong Pumps Inc.
- d. Aurora Pump; Division of Pentair Pump Group
- e. Bell & Gossett ITT; Fluid Handling Div
- f. MEPCO (formerly Dunham-Bush, Inc.)
- g. Peerless Pump; a Member of the Sterling Fluid Systems Group
- h. Patterson Pump Co.; a Subsidiary of the Gorman-Rupp Co
- i. Taco, Inc.
- j. Weinman; Div of Crane Pumps & Systems
- k. Or approved equal.

C. End Suction Pumps

1. Provide in accordance with the following:

- a. Type: Horizontal mount, single stage, vertical split case, flexible coupling, base mounted, designed for 175 psi working pressure, with true back pull, capable of being serviced without disturbing piping connections.
- b. Casing: Cast iron, 125 psi ANSI flanges, tapings for gage and drain connections, and venting pet cock at its highest point.



- c. Shaft: Heat-treated carbon steel.
- d. Bearings: Regreasable ball bearings.
- e. Seal: Mechanical, with carbon seal ring and ceramic seat.
- f. Motor: Open, drip-proof, regreasable ball bearings.
- g. Impeller: Enclosed type, hydraulically and dynamically balanced, keyed to shaft and secured with locking screw.
- h. Baseplate: Structural steel with welded cross members, and open grouting area.
- i. Coupling: Flexible, capable of absorbing torsional vibration, equipped with coupling guard with opening for meter reading.

2. Approved Manufacturers:

Allied Pump Corporation
Amtrol Inc.
Armstrong Pumps Inc.
Aurora Pump; Division of Pentair Pump Group
Bell & Gossett ITT; Fluid Handling Div
Federal Pump Corp.
MEPCO (formerly Dunham-Bush, Inc.)
Peerless Pump; a Member of the Sterling Fluid Systems Group
Patterson Pump Co.; a Subsidiary of the Gorman-Rupp Co.
Weinman; Div of Crane Pumps & Systems
Worthington Pump, Inc.
Taco, Inc.
Or approved equal.

- D. Motor Enclosures and Temperature Rise: Motors subject to excessive dust or abrasive shall be of the totally enclosed type. Motors subject to dripping oil or water shall be of the drip proof or otherwise enclosed type. Conditions constituting a hazard from an explosive standpoint shall require a motor of the explosion proof class. Temperature rise with Class "A" insulation shall be based on the following: Open frame: 40o C.; totally enclosed and fan cooled: 55o C. Temperature rises shall conform to A.I.E.E. Standards for continuous and/or short time rated motors. All motors, motor starters, variable frequency drives and LonWorks cards (for variable speed pumping systems) shall be in accordance with the requirements of Section 262419, Motors and Control Equipment, regardless if the pumping system is packaged or non-packaged.



PART 3 - EXECUTION

3.01 SUPPLEMENTAL INSTALLATION

A. Install pumps in accordance with the following:

1. Access: Provide access space around pumps for service, but in no case less than that recommended by the manufacturer.
2. Install in-line pumps in piping system with supports and vibration isolators recommended by the manufacturer.

B. Electrical Wiring

1. The Contractor shall install electrical devices furnished by manufacturer but not specified to be factory-mounted. Furnish copy of manufacturer's wiring diagram submittal to Electrical. Verify that electrical wiring installation is in accordance with manufacturer's submittal and installation requirements of Division 26 Sections. Do not proceed with equipment start-up until wiring installation is acceptable.
2. The Contractor shall provide the control wiring between field-installed controls, indicating devices, and pump control panels. The Temperature Control System Contractor shall provide integration of monitoring and alarm functions by integrating the pumping system into the Building Management System/Direct Digital Control, BMS/DDC.
3. Control interlock wiring between pumps and between pumps and field-installed control devices that are not factory installed shall be provided by Temperature Control System Contractor. Power wiring shall be provided by the Contractor. Temperature Controls shall be provided by the Contractor.
4. All pumps shall be installed on the 24-hour panel for continuous uninterrupted pump operation (as called for by the outside thermostat when ambient temperature is at 40 degrees F. or less.)

C. Piping Connections: Provide piping, valves, accessories, gauges, supports, and flexible connections.

3.02 INTERDISCIPLINARY TESTS AND FUNCTIONAL PERFORMANCE TESTS

A. Interdisciplinary Pre-Start-Up and Start-Up Tests:

The Contractor shall conduct interdisciplinary pre-start up and start up tests as per the manufacturer's start up procedures. Contractor shall submit signed start up



affidavit signed by the factory authorized service representative indicating that all of the manufacturer's pre-start up and start up procedures have been successfully completed.

B. Functional Performance Tests:

Contractor shall also submit signed functional performance testing affidavit signed by the factory authorized service representative indicating that all of the manufacturer's functional performance tests have been successfully completed. Refer to the functional performance tests as defined in Section 230923 since a BMS/DDC system is to be provided and the equipment is to be integrated into the BMS/DDC system.

END OF SECTION 232123



SECTION 233113
METAL DUCTWORK

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide all the metal ductwork used for the HVAC system, as specified herein, as shown on the Drawings and as needed for a complete and proper installation. The inserted section of ducts shall match the existing duct material and schedule.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data

1. Submit Shop Standards for metal ductwork including gages, materials, type of joints, sealing requirements, method of fabrication and reinforcing. Shop standards shall be in accordance with the SMACNA HVAC Duct Construction Standards, latest edition.
2. Submit manufacturer's product data for factory-fabricated single wall round ductwork, duct sealant and cement, gasket materials, duct liner and sound traps; and installation instructions.
3. Include American Conference of Governmental Industrial Hygienists (ACGIH) figure numbers for hoods if applicable.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards

1. SMACNA Standards: Comply with SMACNA's HVAC Duct Construction Standards Metal and Flexible Third Edition-2005 for fabrication and installation of metal ductwork.



2. NFPA Compliance: Comply with the NFPA 96-1984 as amended by MC 506.
3. Comply with the New York City Mechanical Code.

PART 2 - PRODUCTS

2.01 MATERIALS

A. Sheet Metal:

1. Galvanized Steel: Lock-forming quality; ASTM A 653 G60 coating designation; mill-phosphatized finish for surfaces of ducts exposed to view.
2. Reinforcement Shapes and Plates: Galvanized steel reinforcement where installed on galvanized, sheet metal ducts; compatible materials for aluminum and stainless-steel ducts.
3. Tie Rods: Galvanized steel, 1/4" minimum diameter for 36" length or less; 3/8" minimum diameter for lengths longer than 36".

B. Gages of Metal for galvanized rectangular duct: Gages of metal shall be in accordance with Tables 2.1 through 2.28 of SMACNA HVAC Duct Construction Standards Third Edition - 2005. Duct shall be constructed to the pressure shown on the Drawings. The duct pressure classification shall default to the equipment external static pressure if the pressure levels are not shown on the Drawings.

C. Hangers and Supports

1. Rod Type Hangers and Angles: Hot dip galvanized steel with 2 locking nuts in place.
2. Strap Hangers: Same material as ducts except that galvanized-steel straps attached to aluminum ducts shall have contact surfaces painted with zinc-chromate primer.
3. Trapeze and Riser Supports: Steel shapes complying with ASTM A36. Same material as ducts.
4. Strap and Rod Sizes: Comply with SMACNA for sheet width and thickness and for rod diameters.
5. For ducts with a cross sectional area of 2 square feet or less, hangers shall be constructed of at least 1 inch by 1/16 inch steel strap. For ducts with a cross



sectional area of over 2 square feet, hangers shall be constructed of at least 1 inch by 1/8 inch steel strap.

D. Miscellaneous Ductwork Materials:

1. Sheet Metal Screws, Machine Bolts, Rivets and Nuts: Tinned, cadmium plated or rust resistant materials. Bolts shall be button-head stove bolts, 1/4" x 3/4" unless otherwise specified.
2. Concrete Inserts: Steel or malleable iron, galvanized; continuously slotted or individual inserts conforming with MSS SP-58, Types 18 and 19, Class A-B.
3. Beam Clamps: For ducts with a cross sectional area of 2 square feet or less, clamp shall be Caddy Catalog Number 4H-Series Fig 2. For ducts with a cross sectional area of over 2 square feet, clamp shall be Fee & Mason 255L with locking nut and 255S retaining strap. Other Manufacturers: Gumut, Cooper Industry, or approved equal.
4. Welding Studs: Interactive stud welding gun, capacitor discharge, low carbon steel, copper flashed.
5. Structural (carbon) Steel Shapes and Steel Plates: ASTM A36, shop primed.
6. Stainless Steel Shapes and Plates: ASTM A276 and ASTM A666.
7. Machine Bolt Expansion Anchors:
 - a. Non-caulking single unit type: Federal Specification: FS FF-S-325, Group II, Type 2, Class 2, Style 1.
 - b. Non-caulking double unit type: Federal Specification: FS FF-S-325, Group II, Type 2, Class 2, Style 2.
8. Duct Sealant: Non-hardening, non-migrating mastic or liquid elastic sealant, type applicable for fabrication/installation detail, as compounded and recommended by manufacturer specifically for sealing joints and seams in ductwork.
 - a. All adhesives and sealants used on the construction of ductwork shall comply with the South Coast Air Quality Management District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond



to an effective date of the SCAQMD Rule #1168 of July 1, 2005, and Rule Amendment date of January 7, 2005.

9. If any fiberglass duct lining is used, it shall be covered with a matte-faced neoprene covering and sealed with an acrylic polymer. Surface burning characteristics shall have a flame spread index less than 25 and smoke developed index less than 50 per ASTM E84. Lining shall be secured with pins or mechanical fasteners. Lining that is secured with adhesive only is not acceptable. The fiberglass lining shall not support fungi or bacterial growth as per ASTM C1338, ASTM G21 and ASTM G22. Fiberglass lining shall conform to the erosion test method described in UL Publication No. 181. Fiberglass lining density shall be 1-1/2 lbs. per cubic foot, minimum of 1", unless otherwise indicated on the Drawings.

a. The duct lining shall have the following minimum R values:

Thickness (in)	R Value (hrft ² °F/BTU)
1	4.3
1.5	6.3
2	8.7

b. The minimum duct lining sound absorption coefficients shall be as follows:

Thickness (in.)	NRC
1	.75
1.5	.90
2	1.00

10. Approved manufacturers:

- a. Owens Corning Aeroflex
- b. Johns Manville Permacote Linacoustic
- c. Certainteed Ultralite
- d. Or approved equal.

11. Duct liner may also be a non-erosive, open cell, fiber-free, polyimide foam material. Foam maximum thermal conductivity shall be .35 BTU/inhrft²degF. Foam surface burning characteristics shall have a flame spread index less than 25 and smoke



developed index less than 50 per ASTM E84. The foam lining shall conform to the erosion test method described in UL Publication No. 181. The foam lining shall not support fungi or bacterial growth as per ASTM C1338, ASTM G21 and ASTM G22. Foam lining shall be coated with an acrylic polymer. Foam sound absorption coefficient shall be a minimum of .65 NRC for 1" lining and .80 NRC for 1-1/2" lining. The foam lining shall be Johns Manville Polycoustic, Gamut, Armacell, or approved equal for use as a thermal/acoustical liner for metal duct systems.

12. All adhesives and sealants used on the fabrication/installation of internal acoustical lining shall comply with the South Coast Air Quality Management District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond to an effective date of the SCAQMD Rule #1168 of July 1, 2005, and Rule Amendment date of January 7, 2005.

2.02 FABRICATION - GENERAL

- A. Fabricate ductwork from galvanized sheet metal of the gages specified in SMACNA HVAC Duct Construction Standards Third Edition - 2005

PART 3 - EXECUTION

3.01 SUPPLEMENTAL INSTALLATION

- A. Provide necessary transformation pieces, and flexible fabric connections (Refer to Section 233300: Duct Accessories) for ductwork connected to air handling units or air inlet and outlet devices.
- B. Field Fabrication: Complete fabrication of work at project as necessary to match shop-fabricated or factory-fabricated work to accommodate installation requirements.
- C. Where the corner of an angle iron brace or joint member projects into a walking passage, the corner shall be mitered and shall be padded with 1/2" minimum thickness flexible foamed plastic material to minimize the possibility of injury to personnel.

3.02 INSTALLATION OF DUCT LINER

- A. All adhesives and sealants used on the fabrication/installation of internal acoustical lining shall comply with the South Coast Air Quality Management



District (SCAQMD) Rule #1168; Indoor Environmental Quality Section, Credit EQ-4.1. Those limits correspond to an effective date of the SCAQMD Rule #1168 of July 1, 2005, and Rule Amendment date of January 7, 2005.

- B. Dimensions of lined ducts indicated on the Drawings are the inside dimensions of the duct after the liner has been installed. The duct dimensions shall be increased as necessary to compensate for liner thickness.
- C. Install as per SMACNA HVAC Duct Construction Standards, Metal and Flexible, Third Edition, 2005. Include metal nosing, etc. as required.

3.03 HANGER ATTACHMENTS

Reference: SMACNA HVAC Duct Construction Standards, Third Edition-2005 Figures 4-1,4-2,4-3.

A. General

- 1. Secure upper hanger attachments to structural steel or steel bar joists wherever possible.
- 2. Do not attach hangers to steel decks.
- 3. Metallic fasteners installed with electrically operated or powder driven tools may be used as hanger attachments in accordance with the SMACNA HVAC Duct Construction Standards, Third Edition-2005.

B. Attachment to Steel Frame Construction: Provide intermediate structural steel members where required by ductwork support spacing. Select steel members for use as intermediate supports based on a minimum safety factor of 5.

- 1. Secure upper hanger attachments to steel bar joists at panel point of joists.
- 2. Do not drill holes in main structural steel members.

C. Attachment to Cast In Place Concrete:

- 1. Secure hangers to overhead construction with self-drilling type expansion anchors and machine bolts.
- 2. Secure hanger attachments required to be supported from wall or floor construction with single unit expansion anchors or self-drilling type expansion anchors and machine bolts.

3.04 HANGERS FOR DUCTS, 2 INCHES W.G. AND UNDER



- A. Install hangers for ducts as specified in the SMACNA HVAC Duct Construction Standards, Third Edition-2005
- B. Prime coat plain steel rods threaded at the site immediately after installation as per Section 099123: Painting. Galvanized rods shall not be primed.

3.05 HANGERS FOR DUCTS OVER 2 INCHES W.G.

- A. Install trapeze hangers for ducts as specified in the SMACNA HVAC Duct Construction Standards Third Edition-2005, Strap hangers shall not be used in this application.

3.06 DUCT RISER SUPPORTS

- A. Support vertical round ducts and vertical rectangular ducts as per SMACNA HVAC Duct Construction Standards, Third Edition-2005.

3.07 CONNECTIONS

- A. General Contractor shall arrange to have the connections of metal ductwork to equipment and shall provide flexible connection for each ductwork connection to equipment mounted on vibration isolators, and/or equipment containing rotating machinery. (Refer to Section 233300: Duct Accessories for flexible connectors).
- B. Coordinate as necessary to ensure that access doors have been provided in hung ceilings and any other required places for proper operation and maintenance.

3.08 ADJUSTING AND CLEANING FOR START UP AND WARRANTEE

- A. Clean dust and debris out of ductwork internally, unit by unit, as units are installed. Clean external surfaces of foreign substances that might cause corrosive deterioration of metal. Clean external surface where ductwork is to be painted that might interfere with painting or cause paint deterioration.
- B. Paint the required duct as per Section 230501: Basic HVAC Requirements.
- C. Balancing: Refer to Section 230594: Balancing of Systems for air distribution balancing of metal ductwork. Seal any leaks in ductwork that become apparent during the balancing procedure.

END OF SECTION 233113



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 233300
DUCTWORK ACCESSORIES

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide duct accessories specified herein, shown on the Drawings along with all the auxiliary work needed for a complete and proper installation. The types of ductwork accessories specified in this Section include the following: turning vanes, duct hardware, duct access doors and flexible connections.

1.02 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Shop Drawings: Submit manufacturer's assembly-type shop drawings and shop standards. Submit SMACNA Figure Numbers for each shop fabricated item.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards
 - 1. SMACNA Compliance: Comply with applicable portions of SMACNA: HVAC Duct Construction Standards, Metal and Flexible, 2005 edition.
 - 2. Industry Standards: Comply with SMACNA recommendations pertaining to construction of ductwork accessories, except as otherwise indicated on the Drawings.
 - 3. NYC Mechanical Code Compliance: Comply with applicable provisions of the NYC Mechanical Code Chapters 5, 6 and 7 and the manufacturer's installation instructions pertaining to installation of ductwork accessories.



PART 2 - PRODUCTS

2.01 MATERIALS AND MANUFACTURERS

A. Turning Vanes

1. Fabricated Turning Vanes: Provide fabricated turning vanes and vane runners, constructed in accordance with SMACNA: HVAC Duct Construction Standards, latest edition.
2. Acoustic Turning Vanes: Provide acoustic turning vanes constructed of airfoil shaped aluminum extrusions with perforated faces and fiberglass fill.
3. Provide shop fabricated turning vanes or provide from one of the following manufacturers:
 - a. Anemostat Products Div.
 - b. Dynamics Corp. of America
 - c. Duro Dyne Corp.
 - d. Tuttle & Bailey, Hart & Cooley Mfg. Co.
 - e. Titus Product, Div. of Philips Inds.
 - f. Or approved equal.

B. Duct Hardware

1. Provide test hole fittings for making air readings for the proper adjusting and testing of the ventilating systems. Material and gauge of the fittings shall be compatible with the duct material. Include screw cap and gasket. Size of fitting shall allow insertion of testing instruments and of length of fitting shall allow for the duct insulation thickness. "Duro Dyne", instrument test port, "Ventlock 699" are suitable for this purpose. If required, provide test hole fitting for microprocessor type of instrument reading either local or remote.
2. Provide shop fabricated duct hardware or provide from of one of the following manufacturers:
 - a. Duro Dyne Corp.
 - b. Young Regulator Co.
 - c. Dynamics Corp. of America
 - d. Or approved equal.

C. Fan Connections (Flexible Connections): (Ref. SMACNA HVAC Duct Construction Standards - Latest Edition)

1. Provide an airtight fabric neck at the inlet and at the outlet connections of all air handling units, supply fans and exhaust fans and where ductwork



connects to vibration isolation equipment in accordance with MC.603.18.

2. Necks shall be not less than 3" nor more than 10" in width and both sides shall be secured with crimped lock seam the entire perimeter with galvanized sheet steel bands 3" wide. This assembly shall be securely fastened to ducts and fans, and the joints shall be made air tight. Necks shall not be oiled or painted. Neck fabric shall be one of the following materials:

- a. Cotton duck, 10-ounces per square yard minimum weight, conforming to Federal Specifications CCC-C-428D (treated for fire, water, and mildew resistance)
- b. Flameproof elastomeric coated glass fabric, weighing not less than 14-ounces per square yard, having a tensile strength of 200 psi (minimum) and having a heat resistance of up to 500° F. ("Thermafab", manufactured by Duro Dyne Corp., is an example of this material).
- c. Close woven glass cloth, double neoprene coated, 28-ounces per square yard minimum weight.

3. Where ambient air temperature exceeds 100° F, use material No.2b or No.2c. Where materials are exposed to weather or corrosive fumes (acids, alkalies, garage or fume hood exhausts), use material No.2c.

4. Provide shop fabricated fan connections or provide from one of the following manufacturers:

- 1. Duro Dyne Corp.
- 2. Flexaust (The) Co.
- 3. Duct Mate Inc.
- 4. Or approved equal.

D. Smoke Detecting Devices: Provide opening in the ductwork for the smoke detecting devices at various locations, and as indicated on the Mechanical and Electrical Contract Drawings and Approved Shop Drawings. Mechanical Contractor shall install duct smoke detectors in the ductwork. Electrical Contractor shall furnish duct smoke detectors, and provide power wiring and control wiring for the duct smoke detectors.

PART 3 - SUPPLEMENTAL EXECUTION

3.01 INSTALLATION OF DUCTWORK ACCESSORIES

A. Install ductwork accessories in accordance with manufacturer's installation instructions, with applicable



portions of details of construction as shown in SMACNA standards, and in accordance with recognized industry practices to ensure that products serve intended function.

- B. Install turning vanes in square throat elbows in supply and exhaust air systems, and elsewhere as indicated on the Drawings.
- C. Install test hole fittings for making air readings, on both (opposite) sides of discharge duct from all supply and exhaust fans, at set dampers on supply and return branch ducts, and at other locations where shown on the Drawings for the proper adjusting and testing of the ventilating systems.
- D. Install doors in built-up casing to open against system air pressure, with latches operable from both sides.
- E. Coordinate as necessary to interface installation of ductwork accessories with other work.

3.02 FIELD QUALITY CONTROL

- A. Operate installed ductwork accessories to demonstrate compliance with requirements. Test for air leakage while system is operating. Repair or replace faulty accessories, as required to insure proper operation.

3.03 ADJUSTING AND CLEANING

- A. Adjusting: Adjust ductwork accessories for proper settings.
- B. Label access doors in accordance Section 230553: HVAC Identification.
- C. Cleaning: Clean factory-finished surfaces. Repair any marred or scratched surfaces with manufacturer's touch-up paint (Refer to Section 099123: Patching and Painting).

END OF SECTION 233300



SECTION 233301
ACCESS DOORS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide all access doors and frames located in walls and in ceilings, complete with accessories, as indicated on the Drawings and as specified herein.

1.02 REFERENCES

- A. References and industry standards listed in this section are applicable to the Work. Unless more restrictive criteria or differing requirements are explicitly stated in the Specifications shall be deemed mandatory and applicable to the Work.

1. New York City Board of Standards and Appeals (BSA)

1.03 SUBMITTALS

A. Product Data

For each type of door and frame indicated. Include catalogue cuts, construction details relative to materials, individual components and profiles, finishes, and fire ratings (if required) for access doors and frames. Provide

B. Shop Drawings

Schedule: Provide complete door and frame schedule, including types, general locations, sizes, construction details, latching or locking provisions, and other data pertinent to installation. Indicate locations of fire rated doors on schedule.

- C. MEA or BSA resolution for fire rated access doors indicating acceptance for use in New York City.

D. Keys

Furnish 6 keys for all locks



1.04 QUALITY ASSURANCE

A. Fire rated Doors

1. Fire Rated Access Doors for Walls: Complete assemblies meeting MEA or BSA requirements for 1-1/2 hour "B Label" rating. Identify each assembly with factory installed MEA or BSA label.
2. Fire Rated Access Doors For Ceilings: Complete assemblies complying with MEA or BSA requirements for one-hour combustible and one-hour non-combustible floor/ceiling systems. Identify each assembly with MEA or BSA label.

1.05 COORDINATION

- ##### A. Verification:
- Determine specific locations and sizes for access doors needed to gain access to concealed equipment, and indicate on schedule specified in "Submittals" Article.

1.06 DELIVERY, STORAGE, AND HANDLING

- ##### A. Deliver, store, and handle access doors and frames as recommended by the Manufacturer, to protect from damage.

PART 2 - PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

- A. Karp Associates, Inc., Maspeth, NY 11378
- B. Milcor, Inc., Lima, OH 45804
- C. Nystrom Building Products, Minneapolis, MN 55413
- D. Or approved Equal

2.02 NON-FIRE RATED ACCESS DOORS

A. Frames

Minimum 16 gage steel.

1. Flange: Integral exposed flange not less than 3/4" wide around the perimeter.
2. Plaster Applications: Expanded metal lath and exposed casting bead welded to perimeter of frame, in place of integral exposed flange.
3. Acoustical Tile Applications: Frames without exposed flange.



- a. Finish: Factory-applied rust inhibitive baked enamel primer over phosphate treated steel.
- b. Anchorage: Predrilled holes in frame for anchoring with fasteners.

B. Flush Type Door Panel

Minimum 14 gage steel.

1. Hinges: Concealed spring type set to open to approximately 175°; sufficient number to support the door size, or continuous type hinge.
2. Finish: Factory-applied rust inhibitive baked enamel primer over phosphate treated steel.

C. Cam Locks (for doors located in ceilings)

Flush, screwdriver operated; sufficient number to hold door panel in flush, smooth plane when closed.

D. Cam Locks (for doors located in walls)

Flush screwdriver or key operated; sufficient number to hold door panel in flush, smooth plane when closed.

1. One lock on each door panel shall be key operated, pin tumbler type. The remaining locks, if any, shall be screwdriver operated type.

2.03 FIRE RATED ACCESS DOORS FOR WALLS

A. Frames

Minimum 16 gage steel, with integral exposed flange not less than 1" wide around the perimeter.

1. Anchorage: Predrilled holes in frame for anchoring with fasteners.

B. Flush Type Door Panel

Minimum 20 gage steel double wall construction with insulation, equipped with automatic closer and inside release mechanism.

1. Hinge: Continuous hinge set to open to approximately 175°.
2. Finish: Factory-applied baked enamel primer over phosphate treated steel.



C. Automatic Latches

Direct action Knurled knob or turn ring, or key operated; sufficient number to hold door panel in flush, smooth plane when closed.

1. One latch on each door panel shall be key operated, pin tumbler type. The remaining latches, if any, shall be knurled knob or turn ring operated type.

2.04 KEYING FOR NON-FIRE RATED ACCESS DOORS AND FIRE RATED ACCESS DOORS FOR WALLS

- A. Key all locks and latches alike. Furnish 6 keys total.

2.05 FIRE RATED ACCESS DOORS FOR CEILINGS

A. Frames

Minimum 16 gage steel, with integral flange 1" wide.

1. Anchorage: predrilled holes in frames for anchoring with fasteners.

B. Flush Type Door Panel

Minimum 20 gage steel double wall construction with insulation, equipped with automatic closer and inside release mechanism.

1. Hinge: Continuous, set to open approximately 175°.
2. Finish: Factory-applied baked enamel primer over phosphate-treated steel.

C. Automatic Latches

Direct action knurled knob or turn ring, of sufficient quantity to hold door panel in flush, smooth plane when closed.

1. One latch on each door panel shall be key-operated, pin tumbler type.
2. Locking Device: Self-latching key operated cylinder lock. Furnish 6 keys total.

2.06 FABRICATION AND MANUFACTURE

- A. Manufacture access door assemblies as integral units complete with all parts and ready for installation.



B. Fabricate units of continuous welded steel construction unless otherwise indicated or specified. Grind welds smooth and flush with adjacent surfaces. Attachment devices shall be of size and type required to secure access doors to types of supports indicated on the Drawings.

1. Allowable Size Variations: Manufacturer's standard size units that vary slightly from the sizes indicated may be acceptable, subject to the approval of the Commissioner.

2.07 PAINT

A. Shop Primers: Provide primers that comply with Section 099123 "Patching and Painting."

PART 3 - EXECUTION

3.01 INSTALLATION

A. Install the access doors in accordance with the manufacturer's printed installation instructions, except as shown or specified otherwise.

B. Coordinate access door installation with installation of supporting construction.

C. Set units accurately in position and securely attach to support with face panel plumb or level in relation to adjoining finish surface.

3.02 ADJUSTMENT

A. Adjust hardware and doors for proper operation.

B. Remove and replace doors and frames that are warped, bowed, or otherwise damaged.

3.03 LOCATION

A. Provide non-fire rated access doors in non-fire rated construction and fire rated access doors in fire rated construction.

END OF SECTION 233300



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 233313
DAMPERS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide dampers specified herein, shown on the Drawings, needed for a complete and proper installation. Dampers provided as part of factory-fabricated equipment are specified as part of the equipment assembly in their respective sections. Product specific requirements are contained herein.

1.02 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.03 SUBMITTALS

- A. Product Data: Submit manufacturer's product data and shop fabricated drawings. Submit charts indicating free area for flow through damper. Submit lab testing results indicating pressure drop through the dampers.
- B. Shop Drawings
 - 1. Submit manufacturer's assembly-type shop drawings for each type of damper showing interfacing requirements with ductwork, method of fastening or support, and methods of assembly of components. Submit MEA numbers with the Shop Drawings.
 - 2. Submit fire, smoke and combination fire smoke damper installation details including sleeves and duct-mounted access doors and panels. Verify conformance to NFPA 90A, NFPA 92A, UL 555 Rev.6, UL555S Rev.4, MEA and New York City Building Code. UL Classified label shall be indicated on the installation instructions. The MEA approval number shall be indicated on the Shop Drawings, and permanently labeled on equipment.
- C. Certification: Manufacturer's UL installation affidavit for all fire, smoke and combination fire smoke dampers.
- D. Maintenance materials (extra fusible links)



- E. Maintenance data (spare parts lists and maintenance manuals)

1.04 QUALITY ASSURANCE

A. Codes and Standards

1. SMACNA Compliance: Comply with applicable portions of SMACNA: HVAC Duct Construction Standards, Metal and Flexible, last edition, and Fire, Smoke & Radiation Damper Installation Guide for HVAC Systems - Fourth Edition, 1992.
2. UL Compliance: Construct, test, and label fire dampers in accordance with UL Standard 555 Rev. 6 and UL Standard 555S Rev.4.

1.05 EXTRA MATERIALS

- A. Furnish extra fusible links to the Commissioner, one link for every 10 installed at each temperature range. Obtain receipt.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Subject to compliance with requirements, provide shop fabricated dampers or from one of the following manufacturers:

1. Air Balance, Inc.
2. Penn Ventilator Co.
3. Ruskin Mfg.
4. Imperial Dampers & Louver Co., Inc.
5. Nailor Industries Inc.
6. Prefco Products, Inc.
7. Arlan Damper Corp.
8. Greenheck Fan Corp.
9. Pottorff, Div. of PCI Industries
10. Or approved equal.

- B. Subject to compliance with requirements, provide fire dampers from one of the following manufacturers:

1. Arlan Damper Corp.
2. Nailor Industries Inc.
3. Imperial Dampers & Louver Co., Inc.
4. Prefco Products, Inc.
5. Penn Ventilator Co.
6. Ruskin Mfg.
7. Greenheck Fan Corp.



8. Pottorff, Div. of PCI Industries
9. Or approved equal.

2.02 DAMPER ACTUATORS

A. (Furnished by Temperature Control System Contractor)

Manufacturers:

1. Belimo Aircontrols (USA) Inc.
 2. Staefa Control System/ Siemens Building Technologies, Inc.
 3. Siemens Building Technologies, inc..
 4. Or approved equal.
- B. Operation: When motor is energized, damper shall open; when non-energized, damper shall close or return to a pre-set position.

2.03 FIRE DAMPERS

A. Provide 1-1/2 hour or 3 hour-fire rated damper (as required in RS13 of the NYC Building Code), listed under UL Standard 555 Rev.6 of types and sizes indicated on the Drawings. Construct casings of galvanized steel. Provide fusible link rated at 50 degrees F over the maximum temperature that is normally encountered when the system is in operation or shut down, but not less than 160 degrees F (reference RS13). Exception: Where combination fire/smoke dampers are located within air ducts that are part of an engineered smoke-control system, fusible links or other approved heat responsive devices shall have a temperature rating approximately 50 degrees F above the maximum smoke control system designed operating temperature, but shall not exceed UL 555S Rev. 4 degradation test temperature rating of the combination fire/smoke damper or a maximum of 350 degrees F (reference RS13). Provide damper with positive lock in closed position.

1. Damper Blade Assembly: Curtain type, single blade or multiple blades.
2. Blade Material: Steel, match casing.

B. Each fire damper shall be supplied with factory furnished or sheet metal shop fabricated steel sleeves and retaining angles as per SMACNA: Fire, Smoke & Radiation Damper Installation Guide for HVAC Systems - Fourth Edition, 1992 Figure 2-1 or in accordance with the manufacturers' UL approved installation. Gauge of



sleeve shall be at least equal to gauge of duct when one or more of the following duct sleeve connections are used: plain S slip, hemmed S slip, standing S slip, reinforced standing S slip, inside slip joint, or double S slip and other UL/SMACNA approved breakaway connections. The sleeve thickness used shall not be less than that required by the New York City Building Department. If any other duct sleeve connections are used other than UL breakaway connections, the sleeve shall be minimum 16 gauge for dampers up to 36" wide X 24" high and 14 gauge if width exceeds 36" or height exceeds 24. Fire damper shall have MEA numbers affixed to them.

2.04 BACK-DRAFT (RELIEF) DAMPERS

- A. Product Description: Multi-Blade, back-draft dampers: Parallel-action, gravity-balanced, Galvanized 16 gage thick steel or extruded aluminum. Blades, maximum 3 inch width, center pivoted, with felt or flexible vinyl sealed edges. Blades linked together in rattle-free manner with 90-degree stop, steel ball bearings, and plated steel pivot pin. Furnish dampers with adjustment device to permit setting for varying differential static pressure.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Install damper in accordance with damper manufacturer's recommendations and all applicable codes.
- B. Install access doors and fire rated access door as required.
- C. Coordinate with other work, including ductwork, as necessary to interface installation of damper properly with other work.
- D. Provide a neoprene gasket, 1/4" thick, full width of flange, wherever a galvanized duct connects to aluminum outside air intake.

3.02 INSTALLATION OF FIRE DAMPERS

- A. All fire dampers shall be installed in ducts in the fire rated partitions, walls, floors, roof and where indicated on the Drawings



- B. All fire dampers shall be installed as per SMACNA: Fire, Smoke & Radiation Damper Installation Guide for HVAC Systems - Fourth Edition, 1992 and/or manufacturers' UL Classified instructions. Contractor shall obtain an affidavit from the manufacturer certifying that the UL Classified installation was adhered to. Contractor shall submit this affidavit to the Commissioner.
- C. Connection of duct to fire dampers and fire dampers sleeve shall be made in accordance with damper manufacturer's recommendations and all applicable codes.

3.03 FIELD QUALITY CONTROL

- A. Operate damper to demonstrate compliance with requirements. Test for air leakage while system is operating. Repair or replace faulty components, as required to obtain proper operation.

3.04 ADJUSTING AND CLEANING

- A. Adjusting: Adjust damper for proper settings, install fusible links in fire dampers and adjust for proper action.
- B. Label access doors.
- C. Final positioning of manual dampers is specified in Section 230594: Balancing of Systems.
- D. Cleaning: Clean factory-finished surfaces. Repair any marred or scratched surfaces with manufacturer's touch-up paint.

END OF SECTION



THIS PAGE INTENTIONALY LEFT BLANK



**SECTION 233400
CENTRIFUGAL FANS**

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide centrifugal fans called for in the drawing schedule and as needed for a complete and proper installation. The types of centrifugal fans specified herein are: Utility Fans, Roof Type Exhaust Fans and Inline Centrifugal Fans. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements, shall be referred to for general requirements.

1.02 RELATED SECTIONS

- A. Division 23 Sections
- B. Division 26 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Submit manufacturer's product data for centrifugal fans, including specifications, capacity ratings, fan performance curves with operating point clearly indicated, and certified fan sound-power ratings.
- B. Wiring Diagrams: Submit manufacturer's electrical requirements for power supply wiring to fan units. Clearly differentiate between portions of wiring that are factory installed and portions to be field-installed.
- C. Maintenance data.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. All centrifugal fans required under this Section shall be the product of a single manufacturer.
- B. Codes and Standards
 - 1. AMCA Compliance: Provide centrifugal fans bearing the AMCA Certified Ratings Seal. Sound rate centrifugal fans in accordance with AMCA 300.



2. ASHRAE Compliance: Test and rate centrifugal fans in accordance with ASHRAE 51 (AMCA 210):
3. UL Compliance: Provide centrifugal fan electrical components that have been listed and labeled by UL. Roof type exhaust fan shall be tested in accordance with UL 705.
4. NEMA Compliance: Provide motors and electrical accessories complying with NEMA standards.
5. All appliances regulated by the New York City Construction Codes shall be listed and labeled (reference MC 301.4, MC 301.6). Testing of material and equipment shall be in accordance with 28-113 of the Administrative Code (reference MC 301.5). Whenever the NYC Construction Codes or the Rules of the Department of Buildings requires that material be listed or labeled and material proposed to be used is not so listed or labeled, the use of such material shall be subject to prior approval by the Commissioner and such material shall be used only to the extent set forth in such approval. Materials that were previously approved by the Board of Standards and Appeal (BSA) or by the Department (MEA) before the effective date of the NYC Construction Codes may continue to be used, but only to the extent set forth in such approval, and only if such approval is not specifically amended or repealed by the Commissioner.
6. All work shall be in accordance with the NYC Construction Codes and NYC Electrical Code.

1.05 SUPPLEMENTAL DELIVERY, STORAGE, AND HANDLING

- A. Deliver centrifugal fans with factory-installed shipping skids and lifting lugs; pack components in factory-fabricated protective containers.

1.06 SITE CONDITIONS

- A. Examine the Drawings, visit the site, and take measurements to make sure that the equipment will fit in the spaces allocated.

1.07 COORDINATION

- A. Coordinate installation of equipment supports.

1.08 WARRANTY

- A. Provide manufacturer's guarantee for a two year period. The guarantee period shall start at Substantial Completion.



PART 2 - PRODUCTS

2.01 FANS

A. General

1. Fans shall be of type, capacity, discharge location, and rotation shown on the Drawings and constructed for Class 1 operating limits, unless otherwise indicated. Fans shall be guaranteed not to overload the motor under any condition.
2. Select fans for the air quantities and static pressure indicated on the Drawings, of size and speed so as to allow for a change in volume, without operating in an unstable range.

2.02 UTILITY FANS

- A. Provide utility fans of sizes and arrangement as indicated and of capacities and having accessories as scheduled and where shown on the Drawings.
- B. Fan Units: Provide factory-assembled and tested fan units consisting of housing, wheel, fan shaft, bearings, and fan drive. Clean condition and prime paint sheet metal parts prior to final assembly. Apply final coat of enamel to exterior surfaces after assembly.
- C. Housings: Construct of heavy-gauge steel with side sheets fastened to scroll sheets by means of deep lock seam. Provide round inlet collar slip joint discharge duct connection. Construct housings to be convertible to 8 standard discharges. Provide adjustable motor supports.
- D. Wheels: Provide forward curved or backward inclined wheels as scheduled. Provide swaged hubs. Balance wheels statically and dynamically.
- E. Shafts: Construct of ground and polished steel. Apply rust preventive coating.
- F. Bearings: Provide self-aligning, grease-lubricated, pillow block type bearings, selected for minimum average life (AFBMA L-50) of 200,000 hours.
- G. Motors: Provide open drip-proof high energy efficient motors with ball or sleeve bearings. Provide split phase or capacitor start motors for fractional horsepower, with



- resilient base. Provide induction motors for integral horsepower, with rigid base.
- H. Drive: If "Belt Drive" fans are specified on the schedules, provide multiple matched V-belt drive with minimum 1.4 times rated motor horsepower. Provide adjustable pitch sheave on motor shaft, selected for midpoint at design conditions. If "Direct Drive" fans are specified on the schedules, provide a totally enclosed motor with sealed bearing lubrication.
- I. Vibration Control: Provide as specified in Section 230549: Vibration Isolation.
- J. Accessories: Provide the following accessories as indicated and/or scheduled on the Drawings:
1. Dampers: per ASHRAE 90.1-2004 Article 6.4.3.4.3, systems shall be equipped with motorized dampers that will automatically shut when the systems or spaces served are not in use. Gravity (non-motorized) dampers are acceptable in buildings less than three stories in height. Gravity (non-motorized) dampers are acceptable in systems with a design exhaust capacity of 300 cfm or less. Provide fans with the damper types as shown on the Drawings.
 2. Access Doors: Provide gasketed access door, with latch-type handles, in fan housing.
 3. Scroll Dampers: Provide single blade damper at top of fan scroll, with linkage adjustable and locked to fan housing.
 4. Inlet Screens: Provide removable heavy wire mesh inlet screens on fan inlets.
 5. Drain Connections: Provide 3/4" threaded coupling drain connection at lowest point of housing.
 6. Weather Hoods: Provide protective weather hoods with stamped vents over motor and drive compartment.
- K. Approved Manufacturers
1. Acme Engineering and Mfg. Corp.
 2. Aerovent Inc.
 3. Carnes Company
 4. Central Blower Co.
 5. Champion Blower and Forge, Inc.
 6. Loren Cook Co.
 7. 2Greenheck Corp.
 8. New York Blower Co.
 9. PennBarry



10. Penn Ventilator Co., Inc.
11. Trane(The) Co.
12. Twin City Fan & Blower
13. Or approved equal.

2.03 INLINE CENTRIFUGAL FANS

- A. Provide inline centrifugal fans of sizes and arrangement as indicated and of capacities and having accessories as scheduled and where shown on the Drawings.
- B. Housing: Aluminum split or heavy gauge galvanized steel housing. Square design shall include square duct mounting collars and support bracket and removable panels for access to the motor compartment on direct drive models and access to the shaft and bearing compartment on belt drive models.
- C. Direct-Drive Units: Provide ball bearing motor encased in housing out of the air stream. Provide factory wiring to disconnect located outside of fan housing.
- D. Belt-Drive Units: Provide ball bearing motor mounted on adjustable base, with adjustable sheaves. Provide enclosure around belts. Provide lubricating tubes from fan bearings to outside of fan housing.
- E. Motors shall be permanently lubricated, heavy duty ball bearing type to match with the fan load and pre-wired to the specific voltage and phase.
- F. Wheel: Provide aluminum airfoil blades on aluminum hub.
- G. Vibration Control: Provide as specified on Section 230549: Vibration Isolation.
- H. Accessories: Provide the following accessories as indicated and/or scheduled on the Drawings:
 1. Volume Control Damper: Provide manual controlled volume damper in fan outlet with quadrant and lock.
 2. Companion Flanges: Provide matching flanges on inlet and outlet to connect ductwork to fan.
 3. Fan Guards: Provide guards on inlets and outlets not connected to ductwork, constructed of expanded metal in removable frame.



4. Speed Control: For direct drive fans, provide variable speed switch with off-on control, and speed control for 100% to 50% of fan air delivery.

I. Approved Manufacturers

1. Acme Engineering and Manufacturing Corp.
2. Greenheck Fan Corp.
3. PennBarry
4. Carnes Company
5. Loren Cook Co.
6. Trane Co.
7. Or approved equal.

2.04 ROOF TYPE EXHAUST FANS

A. Roof type exhaust fans shall be of the power roof ventilator type complete with motor, frame, housing, and all other items and accessories. The fan wheel shall be aluminum. All other parts of the fan with which the air stream comes in contact shall be aluminum, stainless steel or reinforced fiberglass polyester plastic. The use of a heavy gage steel motor support plate protected with a baked enamel finish may be accepted.

B. Fan Unit

1. The fan shall be capable of exhausting the cubic feet of air per minute with the static pressure, minimum wheel diameter and speed shown on the Drawings. After assembly of motor and wheel, the rotating parts shall be statically and dynamically balanced at rated speed to provide vibration free operation.
2. The fan shall be quiet operating, backward curved centrifugal non-overload type, provided with approved type belt drive. Direct-connected fans shall be furnished only when indicated on the Drawings. Fan drives shall be sized in accordance with the manufacturer's recommendations. Belts shall be selected for at least 50% excess motor horsepower. Motor shall have an adjustable pitch driving sheave and shall be separated from the air stream. The motor shall be of size and characteristics noted on the Drawings with a terminal box. Wheel and motor support assembly shall be of heavy gage aluminum, galvanized steel, or steel which has been thoroughly coated with a corrosion resisting paint. Fan and motor shall be supported on vibration isolation mounts. The fan shall be provided with an inlet ring or core.
3. The frame of the unit shall be made of aluminum or stainless steel of suitable thickness to insure structural integrity of the unit. The entire unit



shall be designed to provide for easy removal of the fan, motor, and all other items and accessories without disturbing the balance of the unit.

- C. Housing: The fan unit shall be provided with a closed weatherproof housing of one of the types indicated below. Hardware, screws, and all other items and accessories used in the construction of the fan housing shall be of stainless steel or non-ferrous material. Housing shall be provided with 1 brass or cadmium plated padlock where the hood is hinged, or 2 padlocks where the hood is removable. Housing shall be of such design as to form a uniform passage for air all around the rim. The air discharge openings shall be provided with wire mesh screens of 1/2" mesh, No. 16 gage copper, bronze, aluminum or PVC encapsulated bird guard with brass or aluminum screws. Screens shall be securely fastened in place with aluminum, brass or stainless steel fasteners. Where the fan design includes an integral wiring conduit, it shall be large enough to permit passage of a 3/4" conduit through it. Where an integral wiring conduit is not included, openings for the passage of 3/4" conduit (for service wiring) from base of fan into motor compartment shall be provided by the fan manufacturer. Low silhouette type housings are not acceptable. Approved type housings are:
1. Spun Aluminum: This type housing shall be fabricated from not less than No. 14 gage aluminum in wheel sizes less than No. 30.
 2. Reinforced plastic: This type housing shall be dome-shaped, molded and bonded reinforced fiberglass polyester plastic. Sizes, less than No. 21 shall have the housing made from not less than 3/32" thick plastic. Fan size No. 21 and larger shall be of greater thickness but not less than 1/8".
- D. Thermal Overload Protection: Provide starter with thermal overload protection and pilot light for each roof exhaust fan.
- E. Disconnecting Switch: Each roof type exhauster with 2-horsepower or smaller motor shall be provided with a disconnecting switch in general purpose enclosure mounted inside of the housing near the motor. Wiring between motor and switch shall be installed by the fan manufacturer in 1/2" (minimum size) UL Type Flexible conduit. Disconnect switch shall be positioned in a location easily accessible for field connection of service wiring. Conduit outlet from switch shall be 3/4". Disconnect switches for single phase motors shall be 2-pole; for three phase motors, they shall be 3-pole.



- F. Dampers: per ASHRAE 90.1-2004 Article 6.4.3.4.3, systems shall be equipped with motorized dampers that will automatically shut when the systems or spaces served are not in use. Gravity (non-motorized) dampers are acceptable in buildings less than three stories in height. Gravity (non-motorized) dampers are acceptable in systems with a design exhaust capacity of 300 cfm or less. Provide fans with the damper types as shown on the Drawings.
- G. Extension for Damper: Every roof exhauster shall have an extension base at least 12" high, except for fans serving as kitchen range hood or warming pantry exhausters. Each 12" extension base shall have an inspection opening with gasket and No. 14 gage aluminum cover plate in one side of the base. Extension bases for fans with motor operated dampers shall have a weather protected access panel, with handle, of ample size to permit removal of damper unit in one side of the extension. Extension base shall be fabricated from not less than No. 14 gage aluminum sheets and shapes and shall form a rigid structural member for the fan and housing mounted upon it. Extension shall fit the roof curb and shall be secured to it with stainless steel lag screws or anchor bolts.
- H. Bearings: Bearings shall be heavy-duty self-aligning ball bearing type either permanently lubricated or equipped with fittings for grease lubrication. In the latter case, a grease gun of the proper type shall be furnished and delivered to the City of NY.
- I. Approved Manufacturers
1. Acme Engineering & Manufacturing Co.
 2. Greenheck Fan Corp.
 3. Jenco Fan
 4. Zurn Industries Inc.
 5. PennBarry
 6. Carnes Company
 7. Trane Co.
 8. Cook (Loren) Co.
 9. Twin City Fan & Blower
 10. Or approved equal.

2.05 GAS METER ROOM EXHAUST FAN

- A. Provide an explosion proof centrifugal fan in the Gas Meter Room, of the capacity shown on the Drawings.
- B. Housing: Aluminum split housing, constructed of spun aluminum, with aluminum straightening vanes, inlet and outlet flanges, and support bracket adaptable to ceiling mounting.



- C. Direct-Drive Units: Provide ball bearing explosion proof motor encased in housing out of the air stream. Provide factory wiring to disconnect located outside of fan housing. All electrical items shall be explosion proof.
- D. Wheel: Wheels shall be sparkproof and non-corroding. Provide aluminum airfoil blades on aluminum hub.
- E. Vibration Control: Provide as specified on Section 230549: Vibration Isolation.
- F. Accessories: Provide companion flanges: matching flanges on inlet and outlet to connect ductwork and inlet grille to fan as shown on the Drawings.
- G. Dampers: per ASHRAE 90.1-2004 Article 6.4.3.4.3, systems shall be equipped with motorized dampers that will automatically shut when the systems or spaces served are not in use. Gravity (non-motorized) dampers are acceptable in buildings less than three stories in height. Gravity (non-motorized) dampers are acceptable in systems with a design exhaust capacity of 300 cfm or less. Provide fans with the damper types as shown on the Drawings.
- H. Approved Manufacturers
 - 1. Acme Engineering and Manufacturing Corp.
 - 2. Greenheck Fan Corp.
 - 3. PennBarry
 - 4. Penn Ventilator Co.
 - 5. Loren Cook Co.
 - 6. Trane Co.
 - 7. Or approved equal.

PART 3 - EXECUTION

3.01 SUPPLEMENTAL INSTALLATION

- A. Access: Provide access and service space around and over centrifugal fans as indicated, but in no case less than that recommended by manufacturer.
- B. Electrical Wiring: Install electrical devices furnished by manufacturer but not specified to be factory-mounted. Furnish copy of manufacturer's wiring diagram submittal to Electrical. Verify that electrical wiring installation is in accordance with manufacturer's submittal and installation requirements of Division 26. Ensure that rotation is in direction indicated and intended for proper performance. Do not proceed with centrifugal fan start-up until wiring installation is acceptable. Interlock wiring between fan units, and between fans and field-installed



- control devices. Provide control wiring between field-installed controls, indicating devices, and fan starters.
- C. Coordinate all trades to ensure that the installation of fans is not in conflict with the work performed of other trades.
 - D. Isolation: Set centrifugal fans on vibration isolators and fasten in accordance with manufacturer's installation instructions.
 - E. Controls: Provide controls specified in the Temperature Control System Section.
 - F. Ductwork Connections: Refer to Ductwork sections. Provide flexible connections on inlet and outlet duct connections.
 - G. Roof Curbs: The prefabricated roof curb will enclose the opening of the roof exhaust fan, and be furnished with flashing and with wood sill at the top. The curbs shall be mounted directly to the roof structural surface, then roofed and flashed to the top of the wood nailer for weather tightness. The exhaust fan shall fit properly over the sill and shall be secured to it with stainless steel lag screws. The joint between the fan base and the sill shall be made air tight by means of heavy roofing felt counter flashing material. Minimum height from the bottom of the fan to the finished floor shall be 12".

3.02 FIELD QUALITY CONTROL

- A. Upon completion of installation of centrifugal fans, and after motor has been energized with normal power source, test equipment to demonstrate compliance. Where possible field correct malfunctioning equipment, then retest to demonstrate compliance. Replace equipment that cannot be satisfactorily corrected. The Contractor shall perform necessary Interdisciplinary Tests and Functional Performance Tests according to the manufacturer's procedures.

END OF SECTION 233400



SECTION 233700
AIR OUTLETS AND INLETS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide the air outlets and inlets shown on the Drawings and as needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements shall be referred to for general requirements.

1.02 RELATED SECTIONS

- A. Division 23 Sections

1.03 SUPPLEMENTAL SUBMITTALS

- A. Product Data: Include the following:
 - 1. Schedule of registers and grilles indicating drawing designation, room location, quantity, model number, size, and accessories.

1.04 SUPPLEMENTAL QUALITY ASSURANCE

- A. Codes and Standards
 - 1. ARI Compliance: Test and rate air outlets and inlets in accordance with ARI 650: Standard for Air Outlets and Inlets.
 - 2. ASHRAE Compliance: Test and rate air outlets and inlets in accordance with ASHRAE 70: Method of Testing for Rating the Air Flow Performance of Outlets and Inlets.
 - 3. AMCA Compliance: Test and rate louvers in accordance with AMCA 500: Test Method for Louvers, Dampers and Shutters.
 - 4. NFPA Compliance: Provide air outlets and inlets in accordance with NFPA 90A: Standard for the Installation of Air Conditioning and Ventilating Systems.

PART 2 - PRODUCTS



2.01 MANUFACTURERS

A. Approved Manufacturers:

1. Anemostat Products Div.
2. Carnes Co.
3. Krueger, Div. of Air System Components.
4. Nailor Industries Inc.
5. Price Industries Inc.
6. Titus
7. Tuttle and Bailey,
8. Or approval equal.

2.02 GRILLES AND REGISTERS

- A. Unless otherwise specified, fabricate grille and register faces, and frames of steel with factory applied baked-on enamel of the color selected by Commissioner. Include color in the schedule. Construction: Solid steel bar type. Refer to the Drawing for size, size and thickness of borders/flanges, method of fastening, and all other items and accessories.
- B. Supply Grilles/Registers: Adjustable or fixed, double deflection type. Provide grilles/registers with frames. Nominal bar spacing: 3/4" on center.
- C. Registers and Grilles Installed in Exposed Ductwork: Frames are not required for registers and grilles installed directly in uninsulated exposed ductwork.

PART 3 - EXECUTION

3.01 SUPPLEMENTAL INSTALLATION

- A. Install air outlets and inlets in accordance with manufacturers written instructions. Install level and plumb.
- B. Install diffusers, registers, and grilles with airtight connections to ducts and to allow service and maintenance of dampers, equalizing grid, and fire dampers
- C. Registers and Grilles Installed in Exposed Ductwork: Cut openings in ducts, forming a double thickness of metal, to attach registers or grilles with sheet metal screws. Bend back edges of openings into duct, on all 4 sides, a minimum of 1" to provide the thickness of metal stated above. Provide felt or sponge rubber gasketing, all 4 sides of duct openings, for supply grilles and registers.



- D. Coordinate with other work, including ductwork and duct accessories, as necessary to interface installation of air outlets and inlets with other work.
- E. Install diffusers, registers, and grilles with airtight connection to ducts. Follow SMACNA's HVAC Duct Construction Standards Metal and Flexible-Second Edition-Figure 2-14: Grille and Register Connections and Figure 2-15: Ceiling Diffuser Branch Ducts. Install to allow service and maintenance of dampers, air extractors, and fire dampers.

3.02 CLEANING

- A. After installation of registers, and grilles, inspect exposed finish. Clean exposed surfaces to remove burrs, dirt, and smudges. Replace diffusers, registers, and grilles that have damaged finishes.

END OF SECTION 233700



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 236313

AIR-COOLED CONDENSING UNITS

PART 1 GENERAL

1.01 SUMMARY

- A. Section includes refrigerant condenser package, charge of refrigerant and oil, controls and control connections, refrigerant piping and connections, motor starters, electrical power connections.
- B. Division 23 Sections

1.02 REFERENCES

- A. Air-Conditioning and Refrigeration Institute:
 - 1. ARI 210/240 - Unitary Air-Conditioning and Air-Source Heat Pump Equipment.
 - 2. ARI 365 - Commercial and Industrial Unitary Air-Conditioning Condensing Units.
 - 3. ARI 460 - Remote Mechanical-Draft Air-Cooled Refrigerant Condensers.
- B. American Society of Heating, Refrigerating and Air-Conditioning Engineers:
 - 1. ASHRAE 15 - Safety Code for Mechanical Refrigeration.
 - 2. ASHRAE 20 - Method of Testing for Rating Remote Mechanical-Draft Air-Cooled Refrigerant Condensers.
 - 3. ASHRAE 90.1 - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- C. National Electrical Manufacturers Association:
 - 1. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- D. Underwriters Laboratories Inc.:
 - 1. UL 207 - Refrigerant-Containing Components and Accessories, Nonelectrical.



1.03 SUBMITTALS

- A. Shop Drawings: Indicate components, assembly, dimensions, weights and loading, required clearances, and location and size of field connections. Include schematic layouts showing condenser, refrigeration compressors, cooling coils, refrigerant piping and accessories required for complete system.
- B. Product Data: Submit rated capacities, weights, accessories, electrical requirements, and wiring diagrams.
- C. Manufacturer's Certificate: Certify products meet or exceed specified requirements.
- D. Manufacturer's Field Reports: Submit start-up report for each unit.

1.04 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: Submit start-up instructions, maintenance instructions, parts lists, controls, and accessories.

1.05 QUALITY ASSURANCE

- A. Construction and Ratings: In accordance with ARI 210/240, UL 207. Testing in accordance with ASHRAE 20.
- B. Performance Ratings: Energy Efficiency Ratio (EER) not less than prescribed by ASHRAE 90.1 when tested in accordance with ARI 210/240.
- C. Perform Work in accordance with State of New York standard.

1.06 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years documented experience.
- B. Installer: Company specializing in performing Work of this section with minimum three years documented experience.



1.07 DELIVERY, STORAGE, AND HANDLING

- A. Comply with manufacturer's installation instruction for rigging, unloading and transporting units.
- B. Protect units on site from physical damage.

1.08 FIELD MEASUREMENTS

- A. Verify field measurements prior to fabrication.

1.08 WARRANTY SERVICE

- A. Include systematic examination, adjustment, and lubrication of unit, including fan belt replacement, and controls checkout and adjustments. Repair or replace parts in accordance with manufacturer's operating and maintenance data. Use parts produced by manufacturer of original equipment.
- B. Perform work without removing units from service during building normal occupied hours.
- C. Maintain locally, near Place of the Work, adequate stock of parts for replacement or emergency purposes. Have personnel available to ensure fulfillment of this maintenance service, without unreasonable loss of time.

1.09 EXTRA MATERIALS

- A. Furnish two sets of fan belts.

1.10 WARRANTY

- A. Provide one-year warrantee for equipment, materials, and labor. Manufacturer's warrantee shall be provided for equipment including 5-year warrantee for the refrigeration compressors. Other components within the units shall have two (2) year warranty. Warranty period starts at the Substantial Completion of the work.

PART 2 PRODUCTS

2.01 CONDENSING UNITS



- A. Manufacturers:
1. Carrier (Basis of Design)
 2. The Trane Co.
 3. York
 4. Daikin
 5. Or approved equal.

B. Product Description:

1. Packaged, factory assembled, pre-wired unit, suitable for outdoor use consisting of casing, condensing coil and fans, integral sub-cooling coil, liquid accumulator screens, and controls.

2.02 HOUSING

- A. House components in welded steel frame with galvanized steel panels with weather resistant, baked enamel finish.
- B. Mount starters, disconnects, and controls in weatherproof panel with full opening access doors. Furnish mechanical interlock to disconnect power when door is opened.
- C. Furnish removable access doors, or panels with quick fasteners.
- D. Furnish welded steel floor mounting stand and duct collars at coil inlet and fan outlet.

2.03 CONDENSER COILS

- A. Coils: Aluminum fins mechanically bonded to seamless copper tubing. Furnish sub-cooling circuits as applicable. Air test under water to 425 psig, and vacuum dehydration. Seal refrigerant.
- B. Coil shall be e-coat coil protected.
- C. Coil Guard: Louvered with lint screens and shall have security grilles.
- D. Configuration: Single refrigeration circuit
- E. Dual refrigeration circuits for larger capacities (Clason's Point only)



2.04 FANS AND MOTORS

- A. Vertical discharge direct drive driven propeller type condenser fans with fan guard on discharge, equipped with roller or ball bearings with grease fittings extended to outside of casing.
- B. Weatherproof motors suitable for outdoor use, single phase permanent split capacitor or 3 phase, with permanent lubricated ball bearings and built-in current and thermal overload protection.
- C. Low sound Fan and compressors

2.05 CONTROLS

- A. Factory wired and mounted control panel, NEMA 250 Type 4 enclosure, containing fan motor starters, fan cycling thermostats, head pressure controls, compressor interlock and control transformer.
- B. Furnish thermostat to cycle fan motors in response to outdoor temperature.
- C. Furnish head pressure switch to cycle fan motors in response to refrigerant condensing pressure.
- D. Furnish solid state control to vary speed of one condenser fan motor in response to refrigerant condensing pressure.
- E. Standard scrolling Marquee Backnet communication

2.06 COMPRESSORS

- A. Condensing unit shall be equipped with two compressors. One compressor shall be digital type to allow unit to work at partial conditions and a standard scroll compressor.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install in accordance with ASHRAE 15.
- B. Install refrigerant piping from unit to condensing unit. Install refrigerant specialties. Install



connection to electrical power wiring in accordance with Division 26.

3.02 MANUFACTURER'S FIELD SERVICES

- A. Furnish cooling season start-up and winter season shutdown service, for first year of operation. If initial start-up and testing takes place in winter and machines are to remain inoperative. Repeat start-up and testing operation at beginning of first cooling season.

3.03 DEMONSTRATION AND INSTRUCTION

- A. Demonstrate starting, maintenance, and operation of unit.

END OF SECTION 236313



SECTION 237313
AIR HANDLING UNITS

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 RELATED WORK SPECIFIED ELSEWHERE

- A. Division 23

1.02 SUBMITTALS

- A. Product Data:
1. Catalog sheets, brochures, performance charts, standard schematic drawings, specifications and installation instructions for each air handling unit.
- B. Quality Control Submittals:
1. Copy of Seismic Qualifications Certificate.
- C. Contract Closeout Submittals:
1. Operation and Maintenance Data: Deliver 2 copies, covering the installed products, to the Commissioner.

1.03 QUALITY ASSURANCE

- A. Source Quality Control: Factory test units in accordance with ARI Standard 430 - Central-Station Air-Handling Units.
- B. Detailed description of equipment anchorage devices on which the certification is based including installation requirements.

1.04 WARRANTY

- A. Provide manufacturer's guarantee for a two year period. The guarantee period shall start at Substantial Completion.

PART 2 PRODUCTS



2.01 AIR HANDLING UNITS

- A. General Design: Sectional constructed unit which is structurally self supporting, gasketing between adjoining sections, sections consisting of:
1. Fan section.
 2. Coil section(s).
 3. Mixing box and filter section.
 4. Base Rail.
 5. Accessory sections as indicated on drawings.
- B. Casing:
1. Gage:
 - a. Double Wall Exterior: Minimum No. 18 USS sheet steel.
 - b. Double Wall Interior:
 - 1) Solid: Minimum No. 22 USS sheet steel.
 - 2) Perforated: Minimum No. 18 USS sheet steel.
 - a) Perforation located in fan section for acoustics.
 2. Accessibility:
 - a. Removable panels and insulated double wall inspection doors to all internal parts.
 - b. Inspection Doors:
 - 1) Exterior: Minimum No. 18 USS sheet steel.
 - 2) Interior: Minimum No. 20 USS sheet steel.
 - 3) Minimum 1 inch thick unexposed insulation.
 - 4) Continuously gasketed perimeter.
 - 5) Stainless or chrome plated steel hinges.
 - 6) Two latching handles.
 - c. Sections shall maintain structural integrity upon removal of panels.
 3. Unit Insulation:
 - a. Double Wall: Minimum 2 inch thick insulation material.
 - b. Insulation minimum 1-1/2 pound density.
 - c. No insulation edges exposed.
 - d. Materials: Comply with requirements of NFPA Bulletin 90A.
- C. Fan Section:
1. Fan: Double width, double inlet, multi-blade centrifugal type, designed for low operating speeds.
 2. Fan Shaft: Factory coated with corrosion preventive compound.
 3. Shaft Bearings: Grease packed ball or sleeve type, sealed in self-aligning pillow blocks.
 4. Motor: Mounted internally or externally.
 - a. Adjustable motor base.
 - b. Adjustable sheave V-belt drive.
 - c. Belt Guard (For external only).



- d. See Section 262419 - MOTORS, CONTROL EQUIPMENT.
- e. Unit to be provided with VFD.
5. Vibration Isolation:
 - a. Internally Mounted Motor: Spring isolators by manufacturer.
 - b. Externally Mounted Motor: See Section 230549 - VIBRATION ISOLATION.
 - c. Flexible connection between fan and casing.
- D. Coil Section:
 1. Seamless copper or red brass tubing, leak tested at minimum 200 psig air pressure under water.
 2. Aluminum flat plate fins with formed collar permanently bonded to tubing by means of mechanical expansion.
 3. Coil header(s) of cast iron, copper or steel.
 4. Built in pitch between headers, or pitch coils to permit drainage. Extend drainage connections to exterior of unit casing.
 5. Gasketing or safing to prevent air by-pass or infiltration between coil channels, finned surfaces, and casing.
 6. Easy top of side removal of coil(s) without disassembly of adjacent coil(s) or coil section.
- E. Condensate Drain Pan:
 1. Insulated double wall galvanized steel construction.
 2. Sloped to drain connection.
 3. Inspection door to allow for cleaning.
 4. Separate drain pans for each tier of cooling coils.
- F. Filter Section:
 1. Easy filter removal and replacement.
 2. Flat, V or Z pattern arrangement.
 3. Filter Type:
 - a. 2 inch pleated.
- G. Mixing Box:
 1. Mixing box or combination filter and mixing box.
 2. Damper opposed or parallel multi-airfoil blades for:
 - a. Control of outdoor and recirculated air.
 - b. Prevention of air stratification.
 3. Maximum damper leakage rate 20 cfm/sq ft @ 4.0 in wg.
 4. Damper bearings or bushings; stainless or nylon.
 5. Jamb and blade edge seals.
- H. Factory Finish:
 1. All Exposed Surfaces: Factory applied baked enamel, or galvanized finish in accordance with ASTM A 653, coating designation G90.



- I. Base Rail: Factory installed by manufacturer.
1. Minimum 6 inch height (to elevate condensate drain).
 2. Galvanized steel.
 3. Structurally capable of supporting unit on floor or by ceiling suspension.

2.02 MANUFACTURERS

Approved Manufacturers:

A. For Clason's Point Library:

1. Unit AHU-1 by Carrier Air Conditioning Corp. Model AERO, Size 21 is Base of Design. Based on design units has two (2) cooling circuits and will be interconnected with the new air-cooled condenser (see Dwg M-006 for details and sequence of operation). Manufacturer of alternate unit shall demonstrate that performance, dimensions, and control options are compatible with the base of design unit.
2. Trane;
3. Mainstream;
4. Or, approved equal.

B. For Francis Martin Library:

1. Unit AHU-1, by Trane, Model CC Size 8 is Base of Design. Manufacturer of alternate unit shall demonstrate that performance, dimensions, and control options are compatible with the base of design unit.
2. Carrier, AERO, (Vertical)
3. Mainstream
4. Or, approved Equal.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install the Work of this Section in accordance with the manufacturer's printed instructions.

END OF SECTION 237313



SECTION 23 81 03

PACKAGED ROOFTOP AIR CONDITIONING UNITS

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

This section includes roof-mounted units with electric cooling and gas-fired heating, and controls.

1.01 SUMMARY

A. Section Includes:

1. Packaged rooftop air conditioning unit.
2. Roof curb and roof curb adaptor.

B. Related Sections:

1. Section 23 05 49 - Vibration isolators.
2. Section 23 09 23 - TCS with Web Based Building Management
3. Section 23 33 00 - Air Duct Accessories.
4. Section 26 05 22 - Wiring Systems

1.02 REFERENCES

A. Air-Conditioning and Refrigeration Institute:

1. ARI 210/240 - Unitary Air-Conditioning and Air-Source Heat Pump Equipment.
2. ARI 270 - Sound Rating of Outdoor Unitary Equipment.
3. ARI 340/360 - Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment.

B. Air Movement and Control Association International, Inc.:

1. AMCA 500 - Test Methods for Louvers, Dampers, and Shutters.

C. American Society of Heating, Refrigerating and Air-Conditioning Engineers:

1. ASHRAE 52.1 - Gravimetric and Dust-Spot Procedures for Testing Air-Cleaning Devices Used in General Ventilation for Removing Particulate Matter.
2. ASHRAE 62 - Ventilation for Acceptable Indoor Air Quality.



3. ASHRAE 90.1 - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- D. ASTM International:
1. ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Apparatus.
- E. National Fire Protection Association:
1. NFPA 54 - National Fuel Gas Code.
 2. NFPA 58 - Liquefied Petroleum Gas Code.
 3. NFPA 90A - Standard for the Installation of Air Conditioning and Ventilating Systems.

1.03 DEFINITIONS

- A. Energy Efficiency Ratio (EER) - Ratio of net cooling capacity in Btuh to total rate of electric input in watts under designated operating conditions.
- B. Seasonal Energy Efficiency Ratio (SEER) - Total cooling output of an air conditioner during its normal annual usage period for cooling (in Btu) divided by total electric energy input during the same period (in Wh).

1.04 SUBMITTALS

- A. DDC General Conditions.
- B. Product Data: Submit data indicating:
1. Cooling and heating capacities.
 2. Dimensions.
 3. Weights.
 4. Rough-in connections and connection requirements.
 5. Duct connections.
 6. Electrical requirements with electrical characteristics and connection requirements.
 7. Controls.
 8. Accessories.
- C. Manufacturer's Installation Instructions: Submit assembly, support details, connection requirements, and include start-up instructions.
- D. Manufacturer's Certificate: Certify products meet or exceed specified requirements.
- E. Manufacturer's Field Reports: Submit start-up report for each unit.



1.05 CLOSEOUT SUBMITTALS

- A. Project Record Documents: Record actual locations of controls installed remotely from units.
- B. Operation and Maintenance Data: Submit manufacturer's descriptive literature, operating instructions, installation instructions, and maintenance and repair data.

1.06 QUALITY ASSURANCE

- A. Cooling Capacity: Rate in accordance with ARI 340/360.
- B. Sound Rating: Measure in accordance with ARI 270.
- C. Insulation and adhesives: Meet requirements of NFPA 90A.
- D. Performance Requirements: Conform to minimum EER prescribed by ASHRAE 90.1 when tested in accordance with ARI 210/240.
- E. Outside Air Damper Leakage: Test in accordance with AMCA 500.
- F. Perform Work in accordance with State of New York regulations.

1.07 QUALIFICATIONS

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years documented experience.
- B. Installer: Company specializing in performing Work of this section with minimum three years documented experience properly trained by manufacturer.

1.08 PRE-INSTALLATION MEETINGS

- A. Convene minimum one week prior to commencing work of this section.

1.09 DELIVERY, STORAGE, AND HANDLING

- A. Accept units on site. Inspect for damage.
 - A. Protect units from damage by storing off roof until roof mounting curbs are in place.



1.10 COORDINATION

- A. Coordinate installation of roof curbs adaptors with existing roof curb and roof structure, roof deck and roof membrane installation.

1.11 WARRANTY

- A. Furnish five year manufacturer's warranty for compressors.
- B. Furnish five year manufacturer's warranty for heat exchangers.

1.12 WARRANTY SERVICE

- A. Furnish service and maintenance of equipment for one year from Date of Substantial Completion. Include maintenance items as shown in manufacturer's operating and maintenance data, including filter replacements, fan belt replacement, and controls checkout and adjustments.
- B. Furnish 24-hour emergency service on breakdowns and malfunctions for this period.

1.13 EXTRA MATERIALS

- A. Furnish one set of filters and fan belts for each unit.

PART 2 PRODUCTS

2.01 ROOFTOP AIR CONDITIONING UNITS

- A. Manufacturers:
 - 1. The Trane Company.
 - 2. Carrier Corp.
 - 3. Lennox International.
 - 4. Or approved equal.Base of design units indicated in Equipment Schedules.
- B. Product Description: Self-contained, packaged, factory assembled and wired, consisting of roof curb adaptor, cabinet, supply fan, refrigerant cooling coil, compressor, refrigeration circuit, condenser, gas-fired heating section, air filters, mixed air casing, controls, and accessories.
- C. Configuration: As indicated on Drawings. Permitted deviation of the heights of installed unit shall be no more than 3" compering to the Base of Design unit.



- D. Roof Mounting Curb: 14 inch high, galvanized steel, channel frame with gaskets, nailer strips. Full perimeter type for mounting under entire unit.
- E. Cabinet:
1. Designed for outdoor installation with weatherproof construction.
 2. Panels: Constructed galvanized steel with baked enamel finish meeting salt spray test in accordance with ASTM B117. Furnish access doors or removable access panels.
 3. Insulation: Factory applied to exposed vertical and horizontal panels. 2 inch thick neoprene coated glass fiber with edges protected from erosion.
 4. Heat Exchangers: Aluminized steel, welded construction.
 5. Gas Burner: Forced draft type burner with adjustable combustion air supply, pressure regulator, gas valves, manual shut-off, intermittent spark or glow coil ignition, flame sensing device, and automatic 100 percent shut-off pilot. Require unit fan operation before allowing gas valve to open.
- F. Air Filters: 4 thick glass fiber disposable media in metal frames. MERV-13
- G. Controls:
1. Furnish control to provide low ambient cooling to 0 degrees F . Furnish low limit thermostat in supply air to close outside air damper and stop supply fan.
 2. Furnish terminal strip on unit for connection of operating controls to remote panel.
 3. Thermostat: Remote space thermostat with 2 stage heating and 2 stage cooling with automatic changeover. Furnish system selector switch heat-off-cool and fan control switch auto-on.
 4. Status Panel: Furnish remote panel containing the following status indications:
 - a. Cooling mode.
 - b. Heating mode.
 - c. Compressor 1.
 - d. Compressor 2.
 - e. Heating failure.
 - f. Dirty filters.



5. Furnish interface to Direct Digital Control System specified in Section 23 09 23.
6. Microprocessor Based Controls:
 - a. With the following features with the following features:
 1. Monitor each mode of operation.
 2. Evaporator fan status.
 3. Filter status.
 4. Indoor air quality.
 5. Supply air temperature.
 6. Outdoor air temperature.

H. Accessories:

1. Convenience Outlet: Factory installed, 115 volt, 15 amp, GFCI type, internally mounted.
2. Roof Curb Adaptor Package: Furnish duct support hardware to adapt unit to existing roof curb.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify roof adapter curbs are installed and dimensions are as shown on shop drawings and as instructed by manufacturer.

3.02 INSTALLATION

- A. Roof Curb:
 1. Assemble roof adapter curb.
 2. Install adapter roof curb level.
 3. Install units and adapter on existing roof curb providing watertight enclosure to protect ductwork and utility services.
 4. Install gasket material between unit base and roof curb.
- B. Install units on vibration isolators. Refer to Section 23 05 49
- C. Connect units to supply and return ductwork with flexible connections. Refer to Section 23 33 00
- D. Install condensate piping with trap and route from drain pan to splash block on roof nearest roof drain.
- E. Install components furnished loose for field mounting.



- F. Install electrical devices furnished loose for field mounting.
- G. Install control wiring between unit and field installed accessories.
- H. Remove from roof and dispose off-site panels removed from units during installation of economizer and dampers.

3.03 MANUFACTURER'S FIELD SERVICES

- A. Furnish initial start-up and shutdown during first year of operation, including routine servicing and checkout.

3.04 CLEANING

- A. Vacuum clean coils and inside of unit cabinet.
- B. Install new throwaway filters in units at Substantial Completion.

3.05 DEMONSTRATION

- A. Demonstrate unit operation and maintenance.

END OF SECTION 238103



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 238360
CABINET HEATERS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide cabinet heaters as specified herein, as scheduled or indicated on the Drawings, and as needed for a complete and proper installation. Product specific requirements are contained herein; Section 230501, Basic HVAC Requirements, shall be referred to for general requirements.

1.02 PRODUCTS FURNISHED BUT NOT INSTALLED UNDER THIS SECTION

- A. Deliver the following products to the Contractor for installation and connection to power wiring:

- 1. Line voltage thermostats.
- 2. Remote mounted speed switches.

- B. Deliver the following product to the General Construction Contractor for installation:

- 1. Outside air intake box assembly.

1.03 RELATED SECTIONS

- A. Division 09 Sections
- B. Division 23 Sections
- C. Division 26 Sections

1.04 SUPPLEMENTAL SUBMITTALS

- A. Schedule: List manufacturer, unit type, model number, location and performance data for each unit and cabinet heaters.
- B. Wiring Diagrams: Submit manufacturer's electrical requirements for power supply wiring to unit and cabinet heaters. Submit manufacturer's wiring diagrams for interlock and control wirings. Clearly differentiate between portions of wiring that are factory-installed and portions to be field-installed.
- C. Maintenance data



D. Certificate: Contractor's start-up and demonstration affidavit

1.05 SUPPLEMENTAL QUALITY ASSURANCE

A. Codes and Standards

1. All the electrical components of the heaters and electric unit heaters shall be UL listed or labeled.
2. All fans shall be AMCA certified.
3. All components in the conditioned air stream shall conform to the NFPA-90A Flame/Smoke/Fire Contribution Rating of 25/50/0.
4. All electrical devices shall conform to NEMA Standards.
5. All wiring shall conform to NEC Standards.

PART 2 - PRODUCTS

2.01 CABINET HEATER (Hot Water)

- A. Provide cabinet heater(s) as specified, scheduled and at the location(s) shown on the Drawings. Heater shall have a steel enclosure front of not lighter than No. 14 gage, with integral inlet and outlet grilles. Front panel shall overlap wall opening on all sides and shall have gasket at the edges. Panel fasteners shall be of the spring-loaded type, or other approved, with Allen head. Entire cabinet shall be protected with rust inhibitive paint and finished with baked enamel, applied after bonderizing. Color of front shall be as selected by the Commissioner. Heater blower motor shall be controlled by means of an electric thermostat or as specified.
1. Heating Coils: Coil shall be seamless copper tubing with mechanically bonded aluminum fins, designed for 150 psig working pressure for hot water and steam applications, and factory tested at 250 psig air pressure under water.
 2. Cabinet heater shall be complete with proper size heating elements, two or more fans with housing, motor, motor control, and all other items and accessories, all factory assembled. Fans shall be mounted on a heavy gauge steel assembly board, and shall be directly or belt driven with variable



pitch pulley on the motor shaft. Thermal overload protection for the motor shall be provided. Built-in filter frame shall be mounted at the air inlet with disposable air filters.

3. Control circuit transformer and motor starter shall be provided by the unit manufacturer. The Temperature Control Contractor (TCC) shall provide limit controller (aquastat that monitors return hydronic water temperature).
4. The Contractor, shall provide service wiring to the starter. Wiring between the starter and the blower motor shall be provided by the cabinet heater manufacturer.
5. Accessories: Provide aluminum wall boxes with integral eliminators and insect screen. Provide access door as required.
6. For DDC connected cabinet unit heaters, the Temperature Control Contractor shall provide integration of monitoring and alarm functions by providing DDC control points as indicated in the Sequence of Operations - Section 230993 and on the control diagrams.

B. Manufacturers: Cabinet heater shall be manufactured by:

1. Trane Co.;
2. Vulcan Radiator Corp;
3. Modine Mfg. Co.;
4. Or approved equal.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Install the Work of this section in accordance with the manufacturer's printed installation instructions, unless otherwise specified.
- B. Coordinate with other trades to assure correct recess size for recessed cabinet and unit heaters. Install all required access doors.
- C. Hydronic Heaters shall be installed complete with hot water, supply and return piping, valve, and all other items and accessories as shown on the Drawings.
- D. The Contractor, shall install electrical devices (line voltage electric thermostats, remote mounted speed switches) furnished by the unit manufacturer but not specified to be factory-mounted and specified. The Contractor shall verify that electrical wiring



installation is in accordance with manufacturer's submittal and installation requirements of Division-26 Sections. Do not proceed with equipment start-up until wiring installation is acceptable.

- E. Temperature Control Contractor shall furnish and install field control devices (low voltage electronic thermostats, temperature sensors, LonWorks controllers and LonWorks thermostats).
- F. The Temperature Control Contractor shall verify that the control wiring installation is in accordance with manufacturer's submittal and installation requirements of Division-23 Sections. Do not proceed with equipment start-up until control wiring installation is acceptable.

3.02 ADJUSTING AND CLEANING

- A. After construction is completed, including painting, clean unit exposed surfaces, vacuum inside the unit and cabinet heaters. Retouch any marred or scratched surfaces, using finish materials furnished by the manufacturer.

END OF SECTION 238360



SECTION 260501
GENERAL PROVISIONS FOR ELECTRICAL WORK

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 SCOPE OF WORK

- A. Provide labor, materials, tools, machinery, equipment, and services necessary to complete the Electrical Work under this Contract. All systems and equipment shall be complete in every aspect and all items of material, equipment and labor shall be provided for a fully operational system and ready for use. Coordinate the work with the work of the other trades in order to resolve all conflicts without impeding the job progress.
- B. When an item of equipment is indicated on a floor plan and not shown on associated riser diagram or vice-versa, the Contractor shall provide said item and all required conduit and wiring connections for a complete system as part of the Contract.

1.02 EXAMINATION OF SITE

- A. The Contractor is advised to examine the site and to have compared it with the Drawings and Specifications, and deemed to have been satisfied as to the conditions existing at the site, as relating to the actual conditions of the site at the time estimating the Work, the storage and handling of materials, and all other matters as may be incidental to the Work under the Contract, before bidding, and no allowance will subsequently be made to the Contractor by reason of any error due to the Contractor's neglect to comply with the requirements of this clause.

1.03 RELATED DOCUMENTS

- A. Drawings and General Provisions of the Contract.
- B. DDC General Conditions.

1.04 ELECTRICAL EQUIPMENT



- A. All electrical equipment shall be the latest of the current year in design, material and workmanship, and shall be the type or model called for in these Specifications.
- B. If the type or model specified has been superseded by a later type or model, the latest shall be submitted for approval and shall be provided as part of the Contract.

1.05 SUBMITTALS

Provide as outlined in each individual section of these Specifications, including but not limited to:

- A. Product Data: Submit manufacturer's product data for equipment including capacity, performance charts, test data, materials, dimensions, weights, and installation instructions.
- B. Shop Drawings: Submit manufacture's shop drawings indicating dimensions, weight loading, required clearances, location, and method of assembly of components.
 - 1. Submittals are mandatory as noted in the respective specifications. Schedules, installation instructions, startup manuals, operation and maintenance manuals, and shop drawings are always required to be submitted.
- C. Samples
- D. Special Warranty
- E. Quality Assurance submittals
- F. Operation and Maintenance Manuals
- G. Test results and certificates
- H. Manuals and video tape of the personnel instruction.

1.06 COORDINATION DRAWINGS

- A. Provide coordination drawings. Coordination drawings shall be completed so as not to delay the progress of the Project.

1.07 BUREAU OF ELECTRICAL CONTROL

- A. Drawings and Specifications:
 - 1. The Contract Drawings and Specifications shall be submitted by the Contractor to the Bureau of Electrical Control to facilitate any inspections that may be made by that agency.



2. It is the intent of these Specifications that all electric work shall be done in strict accordance with the rules of the Bureau of Electrical Control, and with the NYC Amendments to the 1999 National Electrical Code together with NFPA's 1999 National Electrical Code. Where the requirement of the Drawings or Specifications exceeds the requirements of the Electrical Code, the requirements of the Drawings and Specifications shall be binding upon the Contractor.
3. Should the Bureau of Electrical Control inspect the work and issue a violation, the Contractor shall correct the Work and eliminate the violation as part of the Contract.

B. Interpretation

1. The electric work detailed in these Specifications and shown on Drawings shall be under the jurisdiction of the Commissioner, subject to the approval of the Bureau of Electric Control.
2. The Commissioner shall be the sole source for interpretation of the Contract Documents. Any discrepancies or conflicts shall be brought to the attention of the Commissioner for clarification.

- C. Materials and Appliance: All materials and appliance shall be approved by the Commissioner and installed in accordance with the rules and regulations of the Building Department, Bureau of Electrical Control; certificates of approval including the temporary light and power wiring, shall be obtained by the Contractor and delivered to the Commissioner before the Work is finally accepted.

1.08 WORK IN EXISTING BUILDINGS

- A. The Contractor is referred to DDC General Conditions of Work in Existing Structures which shall apply to the Work of this Contract.
- B. Existing material, fixtures, and equipment which have been removed shall not be used again unless specifically required by the Drawings or Specifications.
- C. Removals, Replacements, Adjustments
 1. The Contractor shall remove, relocate, replace, adjust or adapt, all existing conduit, wiring and other



electric equipment or apparatus, as required, to provide a complete installation.

2. The Work shall include, providing all materials, all necessary extensions, connections, cuttings, repairing, adapting and other Work incidental thereto, together with such temporary connections as may be required to maintain service pending the completion of the permanent Work. All Work shall be left in good working order and in a condition equal to the adjacent new or existing Work.

D. Care in Removing Existing Conductors

1. The Contractor shall use due care and diligence in removing existing conductors from existing conduits in order to prevent conductors from breaking and becoming an irretrievable obstruction within the conduits.

E. Cutting and Repairing

1. Whenever the cutting, or drilling, or removal of any part of the structure (ceilings, walls, floors, shelving, bookcases, partitions, etc.), is required in order to remove, relocate, alter or install any article of electrical equipment (including conduits, boxes, fittings, etc.), the Contractor shall perform all cutting, drilling, etc., and remove the section of structure required. After removal and installation of the electric equipment, the Contractor shall repair the section of structure, as directed by the Commissioner, with new materials, equal to that of adjacent structure of the same type.
 - a. Note that in general, all holes through existing structures for conduit installation shall be core drilled, unless prior written approval is provided by the Commissioner.
2. Whenever holes are cut in fire-rated walls or floor slabs in order to permit the installation of conduit or electrical equipment, these holes shall be repaired with material that will restore the fire rating of the wall or floor slab to its original condition.
3. The Contractor shall paint all repaired areas of the building. The paint shall match the paint of adjacent surface areas, or extend to the nearest architectural break-line, as directed.



4. Wherever any part of the structure is marred or damaged, the Contractor shall repair the damaged or marred areas of the structure.
5. Where a piece of electrical equipment is removed, the Contractor shall finish that part of the surface to match surroundings.

F. Damaged Apparatus: Should any damage, due to the execution of this Contract, occur to the furniture, fixtures, or any equipment or apparatus, such damage shall be properly repaired and/or replaced by the Contractor without charge to the City of New York.

G. Non-Interruption of Services

1. It is imperative that all existing services (electric, light, power, fire alarm, telecommunications, etc.) be kept in operation at all times, unless prior written approval is received from the Commissioner.
2. Provide fire watch services, as necessary, during disruption of fire alarm system.

1.09 TESTS

A. The Contractor shall demonstrate to the Commissioner operation of all equipment and systems. All tests shall be completed to the satisfaction of the Commissioner. Each test shall be performed as indicated in the individual specification section.

1.10 GUARANTEES, WARRANTIES, BONDS, AND MAINTENANCE CONTROL

- A. Refer to DDC General Conditions for procedures and submittal requirements for warranties. Refer to individual equipment specifications for warranty requirements.
1. Compile and assemble the warranties specified for Electrical work into a separated set of documents, tabulated and indexed for easy reference.
 2. Provide complete warranty information for each item to include product or equipment including duration of warranty or bond; and names, addresses, and telephone numbers and procedures for filing a claim and obtaining warranty services.
 3. Manufacturer warranties for the equipment, workmanship and materials should be provided for the period of one



year with the exception of the warranty on the refrigeration compressors. Five- (5) years manufacturer warranty shall be provided for the refrigeration compressors.

4. Manufacturers', in addition to Contractors' warranties, shall be provided for all Electrical equipment and accessories.
5. All warranties are to start from the date of Substantial Completion.

1.11 OPERATIONS, INSTRUCTION, AND MAINTENANCE MANUALS

A. General

Refer to DDC General Conditions for procedures and requirements for preparation and submittal of operation and maintenance manuals for each equipment. Refer to individual equipment specifications for additional requirements. In addition, include the follow information:

1. Description of function, normal operating characteristics and limitations, performance curves, engineering data and tests, and complete nomenclature and commercial numbers of all replaceable parts.
 2. Manufacturer's printed operating procedures to include start-up, break-in, routine and normal operating instructions; regulation, control, stopping, shut-down, and emergency instructions; and summer and winter operating instructions.
 3. Maintenance procedures for routine preventative maintenance and troubleshooting; disassembly, repair, and reassemble; aligning and adjusting instructions.
 4. Servicing instructions and lubrication charts and schedules.
- B. Bind all the other Sections maintenance manuals in a single final Operating and Maintenance Manual.
- C. Refer to DDC General Conditions for procedures and requirements for instruction on each equipment. Refer to individual equipment specifications for the additional instruction requirements.
- D. Contractor shall videotape all the instruction sessions for various equipment and systems as specified in individual



sections of these Specifications. If a manufacturer's particular equipment item is furnished with a instruction video, the manufacturer's video shall be provided in addition to the requirements of this Section, not in lieu thereof and at no additional cost to the City of New Yourk. Contractor shall be responsible for providing informative videotapes covering all the materials and content outlined in each individual section of these Specifications.

1.12 CLEANING AND REPAIR

A. On completion of installation, inspect interior and exterior of installed equipment. Remove paint splatters and other spots. Vacuum dirt and debris; do not use compressed air to assist in cleaning. Repair exposed surfaces to match original finish.

B. Contractor shall not leave sharp exposed metal edges (bottom of threaded rods, electrical equipment supports, etc.) that could otherwise present safety hazards to the building's occupants/work staff.

PART 2 - PRODUCT (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 260501



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260522
WIRING SYSTEMS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Install all conductors as required for the proper operation of the various systems specified. All connections shall be made complete, and all systems shall be energized and tested for proper operation.

1.02 QUALITY ASSURANCE

- A. Wire manufactured over one year prior to delivery to the site will not be accepted.
- B. Tapes for splices or termination shall be dated by the tape manufacturer to indicate that they have been manufactured no longer than six months prior to use in the Work of this Section.

1.03 DELIVERY, STORAGE, AND HANDLING

- A. Conductors shall be delivered at the building in original packages or on reels, and shall have the tag of the manufacturer attached thereto indicating: Contractor's name, Project title and number, Date of manufacturing.
- B. Store material in a clean, dry space and protect from weather.

1.04 SUPPLEMENTAL SUBMITTALS

- A. Submit a Product Schedule indicating the item description and manufacturer name. The Schedule will be accepted by the Commissioner for record purposes only, provided that the items are in full compliance with the Specifications.
- B. Certificates

Provide affidavit stating that all items used are UL listed and meet the specifications.
- C. Submit field test results for wires and cables, including



"Megger" readings with the method used.

PART 2 - PRODUCTS

2.01 WIRES AND CABLES

A. General

1. Conductors shall conform to A.S.T.M. and I.P.C.E.A. standards, and be UL listed and labeled.
2. Conductors shall have 600 volts insulation and shall be of soft-annealed-uncoated copper of 98% conductivity. Copper clad conductors are not acceptable.
3. All conductors shall have identifiable lettering on the insulator jacket as to voltage rating, wire type, A.W.G. size, insulation, and manufacturer I.D.

B. Wire Description

1. Type USE/RHW: 600V, 75°C. Cable shall be capable of operating continuously at a temperature of 75°C, in both wet and dry locations, with RHW insulation.
2. Type THHN/THWN: 75°C, THHN: 90°C shall have a thermoplastic polyvinyl chloride insulation with nylon jacket for 600 volts, and shall comply with ASTM, IPCEA S-61-402 (latest edition) and NEMA WC5 (latest edition).
3. TFFN (stranded) shall be thermoplastic insulated, jacketed by abrasion and oil resistant nylon, rated at 105°C.
4. Metal Clad Cable (Type MC) shall be a factory assembly of conductors, each insulated and enclosed in a metallic flexible interlocking metal tape armor of galvanized steel or aluminum. A bare internal grounding conductor shall be included and insulated from the outer metal armor. All conductors, including grounding conductor, shall be a minimum of #12 AWG. The assembly shall be UL listed and rated 600 volts, 90°C.
5. Mineral Insulated Cable (type MI) shall consist of one or more solid copper conductors insulated with highly compressed magnesium oxide and enclosed in a continuous copper sheath. The MI cable shall be rated at 600V. The MI cable sheath shall be grounded. MI cable shall be 2 hours fire rated.

2.02 SPLICES AND TERMINATIONS



A. General

1. All materials for making splices and terminations shall be specifically designed for use with the type of wire, the cable insulation, the installation and the operating conditions of the specific application and be UL listed.
2. Grounding conductors and bonding jumpers shall be connected by exothermic welding, listed pressure connectors, listed clamps, or other listed means.

PART 3 - EXECUTION

3.01 PREPARATION

- A. Prior to pulling wires and cable, clean raceway systems of all foreign matter and perform all operations necessary so as not to cause damage to wires and cables while pulling.

3.02 INSTALLATION

A. General

1. Use approved lubrication when installing cables in conduits and raceways. Any pulling compounds shall be compatible with the finish of the wires and cables furnished.

B. Type USE/RHW wire

1. Install for service entrance conductors.

C. Type THHN/THWN wire

1. Feeder and Branch Circuits
2. Remote-Control Signaling and Power-Limited Circuits: - Circuit Classes 1, 2 or 3, unless otherwise indicated.

D. Type MC Cable - Use in concealed installation of hung ceiling and gypsum board for:

1. Lighting Branch circuit.
2. Power branch circuit.

E. Type MI Cable (Mineral-Insulated Cable) - Use where required by code. Install as per manufacturer instruction.

F. Lighting Fixture Wires



1. For wiring within lighting fixtures only, where sizes #14 AWG or smaller is required, use Type TFFN.

G. Identifications of Wires and Cables

1. Each wire and cable shall be identified by its circuit in all cabinets, boxes, manholes, handholes, wireways and other enclosures and access locations, and at all terminal points.

H. Terminations

1. For Conductor Sizes Larger Than Terminal Capacity On Equipment: Reduce the larger conductor to the maximum conductor size that terminal can accommodate (reduce section no longer than 1 ft.). Cutting of cable strands to fit terminal is not acceptable.

3.03 FIELD TESTS

- A. Test all feeder cables installed under this Contract with a 1000-volt Megohmmeter. Furnish the Commissioner with a copy of the "Megger" test report, together with an outline of the method used. Any cable not attaining the minimum reading established in the code shall be replaced.

3.04 COMMON NEUTRAL CONDUCTOR

- A. A common neutral may be used for 2 or 3 branch circuits where the circuits are indicated on the Drawings to be enclosed within the same raceway, provided each branch circuit is connected to different phase busses in the panelboard.
- B. Exceptions - The following circuits shall have a separate neutral:
 1. Circuits containing ground fault circuit interrupter devices.
 2. Circuits containing solid state dimmers.
 3. Circuits for computers, peripherals and related equipment.
 4. Circuits recommended by equipment manufacturers to have separate neutrals.

3.05 EQUIPMENT GROUNDING CONDUCTOR

- A. Note that equipment-grounding conductors are not shown on the Contract Drawings but it shall be provided when and as required by code.



END OF SECTION 260522





SECTION 260529

HANGER AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 SUBMITTALS

- A. Shop Drawings: Show support details if different from methods specified or shown on the drawings.
- B. Product Data: Catalog sheets, specifications and installation instructions.

PART 2 PRODUCTS

2.01 ANCHORING DEVICES

- A. Sleeve Anchors: Molly/Emhart's Parasleeve Series, Phillips' Red Head AN, HN, FS Series, or Ramset's Dynabolt Series, or approved equal.
- B. Wedge Anchors: Hilti's Kwik Bolt Series, Molly/Emhart's Parabolt Series, Phillips' Red Head WS, or Ramset's Trubolt Series, or approved equal.
- C. Self-Drilling Anchors: Phillips' Red Head Series S or Ramset's Ram Drill Series, or approved equal.
- D. Non-Drilling Anchors: Hilti's Drop-In Anchor Series, Phillips' Red Head J Series, or Ramset's Dynaset Series, or approved equal.
- E. Stud Anchors: Phillips' Red Head JS Series, or approved equal.

2.02 CAST-IN-PLACE CONCRETE INSERTS



- A. Continuous Slotted Type Concrete Insert, Galvanized:
 - 1. Load Rating 1300 lbs./ft.: Kindorf's D-986.
 - 2. Load Rating 2400 lbs./ft.: Kindorf's D-980.
 - 3. Load Rating 3000 lbs./ft.: Hohmann & Barnard Inc.'s Type CS-H.
 - 4. Load Rating 4500 lbs./ft.: Hohmann & Barnard Inc.'s Type CS-HD.

- B. Threaded Type Concrete Insert: Galvanized ferrous castings, internally threaded.

- C. Wedge Type Concrete Insert: Galvanized box-type ferrous castings, designed to accept bolts having special wedge shaped heads.

2.03 MISCELLANEOUS FASTENERS

- A. Except where shown otherwise on the Drawings, furnish type, size, and grade required for proper installation of the Work, selected from the following: Furnish galvanized fasteners for exterior use, or for items anchored to exterior walls, except where stainless steel is indicated.
 - 1. Standard Bolts and Nuts: ASTM A 307, Grade A, regular hexagon head.
 - 2. Lag Screws: ASME B18.2.1.
 - 3. Machine Bolts: ASME B18.5 or ASME B18.9, Type, Class, and Form as required.
 - 4. Wood Screws: Flat head, ASME B18.6.1.
 - 5. Plain Washers: Round, ASME B18.22.1.
 - 6. Lock Washers: Helical, spring type, ASME B18.21.1.
 - 7. Toggle Bolts: Spring Wing Type; Wing AISI 1010, Trunion Nut AISI1010 or Zamac Alloy, Bolt Carbon Steel ANSI B18.6.3.

- B. Stainless Steel Fasteners: Type 302 for interior Work; Type 316 for exterior Work; Phillips head screws and bolts for exposed Work unless otherwise specified.

2.04 TPR (THE PEEL RIVET) FASTENERS

- A. 1/4 inch diameter, threadless fasteners distributed by Subcon Products, 315 Fairfield Road, Fairfield, NJ 07004 (800) 634-5979. Other Manufacturers: Alcoa Fastening Systems, Apex, or approved equal.



2.05 POWDER DRIVEN FASTENER SYSTEMS

- A. Olin Corp.'s Ramset Fastening Systems, or Phillips Drill Company Inc.'s Red Head Powder Actuated Systems, or approved equal.

2.06 HANGER RODS

- A. Mild low carbon steel, unless otherwise specified; fully threaded or threaded each end, with nuts as required to position and lock rod in place. Unless galvanized or cadmium plated, provide a shop coat of primer or zinc chromate primer paint.

2.07 "C" BEAM CLAMPS

- A. With Conduit Hangers:
1. For 1 Inch Conduit Maximum: B-Line Systems Inc.'s BG-8, BP-8 Series, Caddy/Erico Products Inc.'s BC-8P and BC-8PSM Series, or GB Electrical Inc.'s HIT 110-412 Series, or approved equal.
 2. For 3 Inch Conduit Maximum: Appleton Electric Co.'s BH-500 Series beam clamp with H50W/B Series hangers, Kindorf's 500 Series beam clamp with 6HO-B Series hanger, or OZ/Gedney Co.'s IS-500 Series beam clamp with H-OWB Series hanger, or approved equal.
 3. For 4 Inch Conduit Maximum: Kindorf's E-231 beam clamp and E-234 anchor clip and C-149 series lay-in hanger; Unistrut Corp.'s P2676 beam clamp and P-1659A Series anchor clip with J1205 Series lay in hanger, or approved equal.
- B. For Hanger Rods:
1. For 1/4 Inch Hanger Rods: B-Line Systems Inc.'s BC, Caddy/Erico Products Inc.'s BC, GB Electrical Inc.'s HIT 110, Kindorf's 500, 510, or Unistrut Corp.'s P1648S, P2398S, P2675, P2676, or approved equal.
 2. For 3/8 Inch Hanger Rods: Caddy/Erico Products Inc.'s BC, Kindorf's 231-3/8, 502, or Unistrut Corp.'s P1649AS, P2401S, P2675, P2676, or approved equal.
 3. For 1/2 Inch Rods: Appleton Electric Co. BH-500 Series, Kindorf's 500 Series, 231-1/2, OZ/Gedney Co.'s IS-500 Series, or Unistrut Corp.'s P1650AS, P2403S, P2676, or approved equal.



4. For 5/8 Inch Rods: Unistrut Corp.'s P1651AS beam clamp and P1656A Series anchor clip, B-Line, Kindorf or approved equal.
5. For 3/4 Inch Rods: Unistrut Corp.'s P1653S beam clamp and P1656A Series anchor clip, B-Line, Kindorf or approved equal.

2.08 CHANNEL SUPPORT SYSTEM

- A. Channel Material: 12 gage steel.
- B. Finishes:
 1. Phosphate and baked green enamel/epoxy.
 2. Pre-galvanized.
 3. Electro-galvanized.
 4. Hot dipped galvanized.
 5. Polyvinyl chloride (PVC), minimum 15 mils thick.
- C. Fittings: Same material and finish as channel.
- D. UL Listed Systems:
 1. B-Line Systems Inc.'s B-22 (1-5/8 x 1-5/8 inches), B-12 (1-5/8 x 2-7/16 inches), B-11 (1-5/8 x 3-1/4 inches).
 2. Grinell Corp.'s Allied Power-Strut PS 200 (1-5/8 x 1-5/8 inches), PS 150 (1-5/8 x 2-7/16 inches), PS 100 (1-5/8 x 3-1/4 inches).
 3. Kindorf's B-900 (1-1/2 x 1-1/2 inches), B-901 (1-1/2 x 1-7/8 inches), B-902 (1-1/2 x 3 inches).
 4. Unistrut Corp.'s P-3000 (1-3/8 x 1-5/8 inches), P-5500 (1-5/8 x 2-7/16 inches), P-5000 (1-5/8 x 3-1/4 inches).
 5. Versabar Corp.'s VA-1 (1-5/8 x 1-5/8 inches), VA-3 (1-5/8 x 2-1/2 inches).
 6. Or approved equal.

2.09 MISCELLANEOUS FITTINGS

- A. Side Beam Brackets: B-Line Systems Inc.'s B102, B103, B371-2, Kindorf's B-915, or Versabar Corp.'s VF-2305, VF-25075, or approved equal.
- B. Pipe Straps:
 1. Two Hole Steel Conduit Straps: B-Line Systems Inc.'s B-2100 Series, Kindorf's C-144 Series, or Unistrut Corp.'s P-2558 Series or approved equal.



2. One Hole Malleable Iron Clamps: Kindorf's HS-400 Series, or OZ/ Gedney Co.'s 14-G Series, 15-G Series (EMT), or approved equal.
- C. Deck Clamps: Caddy/Erico Products Inc.'s DH-4-T1 Series, Hilti USA, Armstrong Cork Corp, or approved equal.
- D. Fixture Stud and Strap: OZ/Gedney Co.'s SL-134, or Steel City's FE-431, or approved equal.
- E. Supporting Fittings for Pendent Mounted Industrial Type Fluorescent Fixtures on Exposed Conduit System:
1. Ball Hanger: Appleton Electric Co.'s AL Series, or Crouse-Hinds Co.'s AL Series.
 2. Flexible Fixture Hanger: Appleton Electric Co.'s UNJ-50, UNJ-75, or Crouse-Hinds Co.'s UNJ115.
 3. Flexible (Hook Type) Fixture Hanger: Appleton Electric Co.'s FHFF, or Crouse-Hinds Co.'s UNH-1.
 4. Eyelet: Unistrut Corp.'s M2250., B-line, Kindorf's.
 5. Eyelet with Stud: Kindorf's H262, or Unistrut Corp.'s M2350.
 6. Conduit Hook: Appleton Electric Co.'s FHSN, or Crouse-Hinds Co.'s UNH-13.
 7. Or approved equal.
- F. Supporting Fasteners (Metal Stud Construction): Metal stud supports, clips and accessories as produced by Caddy/Erico Products Inc.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Where specific fasteners are not specified or indicated for securing items to in-place construction, provide appropriate type, size, and number of fasteners for a secure, rigid installation.
- B. Install anchoring devices and other fasteners in accordance with manufacturer's printed instructions.
- C. Make attachments to structural steel wherever possible.

3.02 FASTENER SCHEDULE



- A. Material:
1. Use cadmium or zinc coated anchors and fasteners in dry locations.
 2. Use hot dipped galvanized or stainless steel anchors and fasteners in damp and wet locations.
 3. For corrosive atmospheres or other extreme environmental conditions, use fasteners made of materials suitable for the conditions.
- B. Types and Use: Unless otherwise specified or indicated use:
1. Cast-in-place concrete inserts in fresh concrete construction for direct pull-out loads such as shelf angles or fabricated metal items and supports attached to concrete slab ceilings.
 2. Anchoring devices to fasten items to solid masonry and concrete when the anchor is not subjected to pull out loads, or vibration in shear loads.
 3. Toggle bolts to fasten items to hollow masonry and stud partitions.
 4. TPR fasteners to fasten items to plywood backed gypsum board ceilings.
 5. Metallic fasteners installed with electrically operated or powder driven tools for approved applications, except:
 - a. Do not use powder driven drive pins or expansion nails.
 - b. Do not attach powder driven or welded studs to structural steel less than 3/16 inch thick.
 - c. Do not support a load, in excess of 250 lbs from any single welded or powder driven stud.
 - d. Do not use powder driven fasteners in precast concrete.

3.03 ATTACHMENT SCHEDULE

- A. General: Make attachments to structural steel or steel bar joists wherever possible. Provide intermediate structural steel members where required by support spacing. Select steel members for use as intermediate supports based on a minimum safety factor of 5.
1. Make attachments to steel bar joists at panel points of joists.



2. Do not drill holes in main structural steel members.
 3. Use "C" beam clamps for attachment to steel beams.
- B. Where it is not possible to make attachments to structural steel or steel bar joists, use the following methods of attachment to suit type of construction unless otherwise specified or indicated on the drawings:
1. Attachment to Steel Roof Decking (No Concrete Fill):
 - a. Decking With Hanger Tabs: Use deck clamps.
 - b. Decking Without Hanger Tabs:
 - 1) Before Roofing Has Been Applied: Use 3/8 inch threaded steel rod welded to a 4 x 4 x 1/4 inch steel plate and installed through 1/2 inch hole in roof deck.
 - 2) After Roofing Has Been Applied: Use welding studs, or self-drilling/tapping fasteners. Exercise extreme care when installing fasteners to avoid damage to roofing.
 2. Attachment to Concrete Filled Steel Decks (Total thickness, 2-1/2 inches or more):
 - a. Before Fill Has Been Placed:
 - 1) Use thru-bolts and fish plates.
 - 2) Use welded studs. Do not support a load in excess of 250 pounds from a single welded stud.
 - b. After Fill Has Been Placed: Use welded studs. Do not support a load in excess of 250 lbs from a single welded stud.
 3. Attachment to Cast-In-Place Concrete:
 - a. Fresh Concrete: Use cast-in-place concrete inserts.
 - b. Existing Concrete: Use anchoring devices.
 4. Attachment to Cored Precast Concrete Decks:
 - a. New Construction: Use thru-bolts and fish plates before Construction Work Contractor has placed concrete fill over decks.
 - b. Existing Construction: Toggle bolts may be installed in cells for a maximum load of 300 Lb.
 5. Attachment to Hollow Block or Tile Filled Concrete Deck:



- a. New Construction: Use cast-in-place concrete inserts by having Construction Work Contractor omitting blocks and pouring solid blocks with insert where required.
- 6. Attachment to Waffle Type Concrete Decks:
 - a. New Construction:
 - 1) Use cast-in-place concrete inserts in fresh concrete.
 - 2) If concrete fill has been applied over deck, thru-bolts and fish plates may be used where additional concrete or roofing is to be placed over the deck.
- 7. Attachment to Precast Concrete Planks: Use anchoring devices, except do not make attachments to precast concrete planks less than 2-3/4 inches thick.
- 8. Attachment to Precast Concrete Tee Construction:
 - a. New Construction:
 - 1) Use tee hanger inserts between adjacent flanges.
 - 2) Use thru-bolts and fish plates, except at roof deck without concrete fill.
 - b. Existing Construction:
 - 1) Use anchoring devices installed in webs of tees. Install anchoring devices as high as possible in the webs.
 - c. Do not use powder driven fasteners.
 - d. Exercise extreme care in drilling holes to avoid damage to reinforcement.
- 9. Attachment to Wood Construction: Use side beam brackets fastened to the sides of wood members to make attachments for hangers.
 - a. Under 15 lbs Load: Attach side beam brackets to wood members with 2 No. 18 x 1-1/2 inch long wood screws, or 2 No. 16 x 1-1/2 inch long drive screws.
 - b. Over 15 lbs Load: Attach side beam brackets to wood members with bolts and nuts or lag bolts. Do not use lag bolts in wooden members having a nominal thickness (beam face) under 2 inches in size. Install bolts and nuts or lag bolts in the side of wood members at the mid-point or slightly above. Install plain washers under all nuts.

LOAD	LAG BOLT SIZE	BOLT DIAMETER
15 lbs to 30 lbs	3/8 x 1-3/4 inches	3/8 inch
31 lbs to 50 lbs	1/2 x 2 inches	1/2 inch



Over 50 lbs to load limit of structure.	Use bolt & nut.	5/8 inch
--	-----------------	----------

- c. Bottom chord of wood trusses may be utilized as structural support, but method of attachment must be specifically approved.
 - d. Do not make attachments to the diagonal or vertical members of wood trusses.
 - e. Do not make attachments to the nailing strips on top of steel beams.
10. Attachment to Metal Stud Construction: Use supporting fasteners manufactured specifically for the attachment of raceways and boxes to metal stud construction.
- a. Support and attach outlet boxes so that they cannot torque/twist. Either:
 - 1) Use bar hanger assembly, or:
 - 2) In addition to attachment to the stud, also provide far side box support.

3.04 CONDUIT SUPPORT SCHEDULE

- A. Provide number of supports as required by National Electrical Code. Exception: Maximum support spacing allowed is 4'-0" for conduit sizes 3 inches and larger supported from wood trusses.
- B. Use pipe straps and specified method of attachment where conduit is installed proximate to surface of wood or masonry construction.
 - 1. Use hangers secured to surface with specified method of attachment where conduit is suspended from the surface.
- C. Use "C" beam clamps and hangers where conduit is supported from steel beams.
- D. Use deck clamps and hangers where conduit is supported from steel decking having hanger tabs.
 - 1. Where conduit is supported from steel decking that does not have hanger tabs, use clamps and hangers secured to decking, utilizing specified method of attachment.
- E. Use channel support system supported from structural steel for multiple parallel conduit runs.



- F. Where conduits are installed above ceiling, do not rest conduit directly on runner bars, T-Bars, etc.
1. Conduit Sizes 2-1/2 Inches and Smaller: Support conduit from ceiling supports or from construction above ceiling.
 2. Conduit Sizes Over 2-1/2 Inches: Support conduit from beams, joists, or trusses above ceiling.

3.05 LIGHTING FIXTURE SUPPORT SCHEDULE

- A. General: Do not support fixtures from ceilings or ceiling supports unless it is specified or indicated on the drawings to do so.
1. Support fixtures with hanger rods attached to beams, joists, or trusses. Hanger rod diameter, largest standard size that will fit in mounting holes of fixture.
 - a. Where approved, channel supports may span and rest upon the lower chord of trusses and be utilized for the support of lighting fixtures.
 - b. Where approved, channel supports may span and be attached to the underside of beams, joists, or trusses and be utilized for the support of lighting fixtures.
 2. Use 2 nuts and 2 washers on lower end of each hanger rod to hold and adjust fixture (one nut and washer above top of fixture housing, one nut and washer below top of fixture housing).
 - a. Where specified that an adequately supported outlet box is to support a fixture or be utilized as one point of support, support the box so that it may be adjusted to bring the face of the outlet box even with surface of ceiling.
- B. Specific Installations Where Fixtures May Be Supported From New Ceilings Being Installed By Construction Work Contractor:
1. Support surface mounted fluorescent fixtures and incandescent fixtures directly from plywood backed gypsum board ceilings.
 2. Support surface mounted fluorescent fixtures and incandescent fixtures directly from framing or furring members of fire rated suspended ceilings (double gypsum board).



3. Support recessed mounted fluorescent fixtures and incandescent fixtures directly from furring members of furred gypsum board ceilings.
4. Support recessed mounted fluorescent fixtures and incandescent fixtures directly from the suspension system of suspended acoustical ceilings. Exception: Support each fixture weighing more than 50 pounds (including lamps) independent of the suspended ceiling grid.
5. Deliver documents that state actual fixture weights and indicate fixture locations to the Contractor thru Commissioner.

C. Number of Supports For Ceiling Mounted Lighting Fixtures: Provide at least the following number of supports. Provide additional supports when recommended by fixture manufacturer, or shown on the drawings.

1. Commercial and Industrial Fluorescent Fixtures:
 - a. Support individual fluorescent fixtures less than 2 feet wide at 2 points.
 - b. Support continuous row fluorescent fixtures less than 2 feet wide at points equal to the number of fixtures plus one. Uniformly distribute the points of support over the row of fixtures.
 - c. Support individual fluorescent fixtures 2 feet or wider at 4 corners.
 - d. Support continuous row fluorescent fixtures 2 feet or wider at points equal to twice the number of fixtures plus 2. Uniformly distribute the points of support over the row of fixtures.
 - e. An adequately supported outlet box may be utilized as one point of support for fixtures weighing less than 50 pounds.
2. Vandal Resistant, and Minimum Security Fluorescent Fixtures:
 - a. Support individual fluorescent fixtures less than 2 feet wide at 4 corners.
 - b. Support continuous row fluorescent fixtures less than 2 feet wide at points equal to twice the number of fixtures. Uniformly distribute the points of support.
 - c. Support individual fluorescent fixtures 2 feet or wider at each corner and one support midway along each side of longest axis (6 supports total).



- d. Support continuous row fluorescent fixtures 2 feet or wider at points equal to 4 times the number of fixtures. Uniformly distribute the points of support.
 - e. An adequately supported outlet box may be utilized as one point of support for fixtures weighing less than 50 pounds.
 3. Medium Security Fluorescent Fixtures: Support each fixture at minimum of 6 points (each corner and midway along each side of longest axis). Outlet box shall not be counted as a point of support.
 4. Maximum Security Fluorescent Fixtures: Support each fixture at minimum of 8 points (each corner, and 2 supports spaced equally along each side of longest axis). Outlet box shall not be counted as a point of support.
 5. Mercury Vapor, Metal Halide, and High Pressure Sodium Fixtures:
 - a. Commercial Style: Support fixture at 2 points.
 - b. Industrial Style: Support individual fixtures at one point.
 - c. Vandal Resistant Style: Support fixture at 4 points.
 - d. An adequately supported outlet box may be utilized as one point of support for fixtures weighing less than 50 pounds.
 6. Commercial and Industrial Incandescent Fixtures: Support fixture from adequately supported outlet box, to suit fixture design (fixture weight less than 50 pounds).
 7. Vandal Resistant Incandescent Fixtures: Support fixture from adequately supported outlet box to suit fixture design, plus 2 fasteners through back of fixture into suitable construction behind fixture.
- D. Number of Supports For Wall Mounted Lighting Fixtures: Provide at least the following number of supports. Provide additional supports when recommended by fixture manufacturer, or shown on the drawings.
1. Commercial and Industrial Fluorescent Fixtures:
 - a. Support individual fluorescent fixtures 2 feet long or less at 2 points.
 - b. Support individual fluorescent fixtures over 2 feet long at 3 points.



- c. Support continuous row fluorescent fixtures at points equal to twice the number of fixtures. Uniformly distribute the points of support.
 - d. An adequately supported outlet box may be utilized as one point of support for fixtures weighing less than 50 pounds.
2. Vandal Resistant, and Minimum Security Fluorescent Fixtures:
 - a. Support individual fluorescent fixtures 2 feet long or less at 4 points (each corner).
 - b. Support individual fluorescent fixtures over 2 feet long at 6 points (each corner and midway along each side of longest axis).
 - c. Support continuous row fluorescent fixtures at points equal to 6 times the number of fixtures. Uniformly distribute the points of support.
 - d. An adequately supported outlet box may be utilized as one point of support for fixtures weighing less than 50 pounds.
 3. Medium Security, and Maximum Security Fluorescent Fixtures:
 - a. Support each fluorescent fixture 2 feet long or less at minimum of 4 points (each corner).
 - b. Support each fluorescent fixture over 2 feet long, to 3 feet long at a minimum of 6 points (each corner and midway along each side of longest axis).
 - c. Support each fluorescent fixture over 3 feet long, to 8 foot long at minimum of 8 points (each corner, and 2 supports spaced equally along each side of longest axis).
 - d. Outlet box shall not be counted as a point of support.
 4. Mercury Vapor, Metal Halide, and High Pressure Sodium Fixtures:
 - a. Commercial and Industrial Style: Support fixture at 2 points (Support arm mounted style at 4 points).
 - b. Vandal Resistant Style: Support fixture at 4 points.
 - c. An adequately supported outlet box may be used as one point of support for fixtures weighing less than 50 pounds.
 5. Commercial and Industrial Incandescent Fixtures: Support fixture from adequately supported outlet



box, to suit fixture design (fixture weight less than 50 pounds).

6. Vandal Resistant Incandescent Fixtures: Support fixture from adequately supported outlet box to suit fixture design, plus 2 fasteners through back of fixture into suitable construction behind fixture.

3.06 CHANNEL SUPPORT SYSTEM SCHEDULE

- A. Use channel support system where specified or indicated on the drawings.
- B. Channel supports may be used, as approved, to accommodate mounting of equipment.
- C. Material and Finish:
 1. Dry Locations: Use 12 gage steel channel support system having any one of the specified finishes.
 2. Damp Locations: Use 12 gage steel channel support system having any one of the specified finishes except green epoxy/enamel.
 3. Wet Locations: Use 12 gage steel channel support system having hot dipped galvanized, or PVC finish.

END OF SECTION 260529



SECTION 260532
ELECTRICAL IDENTIFICATION

PART 1 - GENERAL

1.01 RELATED DOCUMENTS

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.02 SUMMARY

- A. This Section includes electrical identification materials and devices required to comply with ANSI C2, NFPA 70, OSHA standards, and authorities having jurisdiction.

1.03 SUBMITTALS

- A. Product Data: For each electrical identification product indicated.

1.04 QUALITY ASSURANCE

- A. Comply with ANSI C2.
- B. Comply with NFPA 70.
- C. Comply with ANSI A13.1 and NFPA 70 for color-coding.

PART 2 - PRODUCTS

2.01 RACEWAY AND CABLE LABELS

- A. Comply with ANSI A13.1, Table 3, for minimum size of letters for legend and for minimum length of color field for each raceway and cable size.
 - 1. Color: Black letters on orange field.
 - 2. Legend: Indicates voltage and service.
- B. Adhesive Labels: Preprinted, flexible, self-adhesive vinyl with legend over laminated with a clear, weather- and chemical-resistant coating.



- C. Pretensioned, Wraparound Plastic Sleeves: Flexible, preprinted, color-coded, acrylic band sized to suit the diameter of the line it identifies and arranged to stay in place by pretensioned gripping action when placed in position.
- D. Colored Adhesive Tape: Self-adhesive vinyl tape not less than 3 mils thick by 1 to 2 inches wide.
- E. Underground-Line Warning Tape: Permanent, bright-colored, continuous-printed, vinyl tape.
 - 1. Not less than 6 inches wide by 4 mils thick.
 - 2. Compounded for permanent direct-burial service.
 - 3. Embedded continuous metallic strip or core.
 - 4. Printed legend indicating type of underground line.
- F. Plasticized Card-Stock Tags: Vinyl cloth with preprinted and field-printed legends. Orange background, unless otherwise indicated, with eyelet for fastener.
- G. Aluminum-Faced, Card-Stock Tags: Weather-resistant, 18-point minimum card stock faced on both sides with embossable aluminum sheet, 0.002 inch thick, laminated with moisture-resistant acrylic adhesive, punched for fasteners, and preprinted with legends to suit each application.
- H. Brass or Aluminum Tags: 2 by 2 by 0.05-inch metal tags with stamped legend, punched for fastener.

2.02 NAMEPLATES AND SIGNS

- A. Safety Signs:- Comply with 29 CFR, Chapter XVII, Part 1910.145.
- B. Engraved Plastic Nameplates and Signs: Engraving stock, melamine plastic laminate, minimum 1/16 inch thick for signs up to 20 sq. in. and 1/8 inch thick for larger sizes.
 - 1. Engraved legend with black letters on white face.
 - 2. Punched or drilled for mechanical fasteners.



- C. Baked-Enamel Signs for Interior Use: Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for the application. 1/4-inch grommets in corners for mounting.
- D. Exterior, Metal-Backed, Butyrate Signs: Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs with 0.0396-inch galvanized-steel backing; and with colors, legend, and size required for the application. 1/4-inch grommets in corners for mounting.
- E. Fasteners for Nameplates and Signs: Self-tapping, stainless-steel screws or No. 10/32, stainless-steel machine screws with nuts and flat and lock washers.

2.03 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Cable Ties: Fungus-inert, self-extinguishing, one-piece, self-locking, Type 6/6 nylon cable ties.
 - Minimum Width: 3/16 inch.
 - Tensile Strength: 50 lb minimum.
 - Temperature Range: Minus 40 to plus 185 deg F.
 - Color: According to color-coding.
- B. Paint: Formulated for the type of surface and intended use.
 - 1. Primer for Galvanized Metal: Single-component acrylic vehicle formulated for galvanized surfaces.
 - 2. Primer for Concrete Masonry Units: Heavy-duty-resin block filler.
 - 3. Primer for Concrete: Clear, alkali-resistant, binder-type sealer.
 - 4. Enamel: Silicone-alkyd or alkyd urethane as recommended by primer manufacturer.

PART 3 - EXECUTION

3.01 GENERAL INSTALLATION

- A. Identification Materials and Devices: Install at locations for most convenient viewing without interference with operation and maintenance of equipment.



- B. Lettering, Colors, and Graphics: Coordinate names, abbreviations, colors, and other designations with corresponding designations in the Contract Documents or with those required by codes and standards. Use consistent designations throughout Project.

3.02 INSTALLATION

- A. Sequence of Work: If identification is applied to surfaces that require finish, install identification after completing finish work.
- B. Self-Adhesive Identification Products: Clean surfaces before applying.
- C. Circuits with More Than 600 V: Identify raceway and cable with "DANGER--HIGH VOLTAGE" in black letters 2 inches high, stenciled with paint at 10-foot intervals over a continuous, painted orange background. Identify the following:
1. Entire floor area directly above conduits running beneath and within 12 inches of a basement or ground floor that is in contact with earth or is framed above unexcavated space.
 2. Wall surfaces directly external to conduits concealed within wall.
 3. All accessible surfaces of concrete envelope around conduits in vertical shafts, exposed in the building, or concealed above suspended ceilings.
 4. Entire surface of exposed conduits.
- D. Install painted identification according to manufacturer's written instructions and as follows:
1. Clean surfaces of dust, loose material, and oily films before painting.
 2. Prime surfaces using type of primer specified for surface.
 3. Apply one intermediate and one finish coat of enamel.
- E. Color Banding Raceways and Exposed Cables: Band exposed and accessible raceways of the systems listed below:



1. Bands: Pretension, wraparound plastic sleeves; colored adhesive tape; or a combination of both. Make each color band 2 inches wide, completely encircling conduit, and place adjacent bands of two-color markings in contact, side by side.
 2. Band Locations: At changes in direction, at penetrations of walls and floors, at 50-foot maximum intervals in straight runs, and at 25-foot maximum intervals in congested areas.
 3. Apply the following colors to the systems listed below:
 - a. Fire Alarm System: Red.
 - b. Fire-Suppression Supervisory and Control System: Red and yellow.
 - c. Combined Fire Alarm and Security System: Red and blue.
 - d. Security System: Blue and yellow.
 - e. Mechanical and Electrical Supervisory System: Green and blue.
 - f. Telecommunication System: Green and yellow.
- F. Caution Labels for Indoor Boxes and Enclosures for Power and Lighting: Install pressure-sensitive, self-adhesive labels identifying system voltage with black letters on orange background. Install on exterior of door or cover.
1. Exposed Boxes: Pressure-sensitive, self-adhesive plastic label on cover.
 2. Concealed Boxes: Plasticized card-stock tags.
 3. Labeling Legend: Permanent, waterproof listing of panel and circuit number or equivalent.
- G. Paths of Underground Electrical Lines: During trench backfilling, for exterior underground power, control, signal, and communication lines, install continuous underground plastic line marker located directly above line at 6 to 8 inches below finished grade. Where width of multiple lines installed in a common trench or concrete envelope does not exceed 16 inches overall, use a single line marker. Depending on Project, paragraph below may require color-coding exceeding NFPA 70 requirements. See Evaluations. Delete where not required by Project or by Code.
- H. Color-Coding of Secondary Phase Conductors: Use the following colors for phase conductors:



1. 208/120-V Conductors:
 - a. Phase A: Black.
 - b. Phase B: Red.
 - c. Phase C: Blue.
 2. 480/277-V Conductors:
 - d. Phase A: Yellow.
 - e. Phase B: Brown.
 - f. Phase C: Orange.
 3. Factory apply color the entire length of conductors, except the following field-applied, color-coding methods may be used instead of factory-coded wire for sizes larger than No. 10 AWG:
 4. Colored, pressure-sensitive plastic tape in half-lapped turns for a distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Use 1-inch-wide tape in colors specified. Adjust tape bands to avoid obscuring cable identification markings.
 5. Colored cable ties applied in groups of three ties of specified color to each wire at each terminal or splice point starting 3 inches from the terminal and spaced 3 inches apart. Apply with a special tool or pliers, tighten to a snug fit, and cut off excess length.
- I. Power-Circuit Identification: Metal tags or aluminum, wraparound marker bands for cables, feeders, and power circuits in vaults, pull and junction boxes, manholes, and switchboard rooms.
1. Legend: 1/4-inch- steel letter and number stamping or embossing with legend corresponding to indicated circuit designations.
 2. Tag Fasteners: Nylon cable ties.
 3. Band Fasteners: Integral ears.
- J. Apply identification to conductors as follows:
1. Conductors to Be Extended in the Future: Indicate source and circuit numbers.
 2. Multiple Power or Lighting Circuits in the Same Enclosure: Identify each conductor with source, voltage, circuit number, and phase. Use color-coding to identify circuits' voltage and phase.



3. Multiple Control and Communication Circuits in the Same Enclosure: Identify each conductor by its system and circuit designation. Use a consistent system of tags, color-coding, or cable marking tape.
- K. Apply warning, caution, and instruction signs as follows:
1. Warnings, Cautions, and Instructions: Install to ensure safe operation and maintenance of electrical systems and of items to which they connect. Install engraved plastic-laminated instruction signs with approved legend where instructions are needed for system or equipment operation. Install metal-backed butyrate signs for outdoor items.
 2. Emergency Operation: Install engraved laminated signs with white legend on red background with minimum 3/8-inch- high lettering for emergency instructions on power transfer, load shedding, and other emergency operations.
- L. Equipment Identification Labels: Engraved plastic laminate. Install on each unit of equipment, including central or master unit of each system. This includes power, lighting, communication, signal, and alarm systems, unless units are specified with their own self-explanatory identification. Unless otherwise indicated, provide a single line of text with 1/2-inch- high lettering on 1-1/2-inch- high label; where two lines of text are required, use labels 2 inches high. Use white lettering on black field. Apply labels for each unit of the following categories of equipment using mechanical fasteners:
1. Panelboards, electrical cabinets, and enclosures.
 2. Access doors and panels for concealed electrical items.
 3. Electrical switchgear and switchboards.
 4. Electrical substations.
 5. Emergency system boxes and enclosures.
 6. Motor-control centers.
 7. Disconnect switches.
 8. Enclosed circuit breakers.
 9. Motor starters.



10. Push-button stations.
11. Power transfer equipment.
12. Contactors.
13. Remote-controlled switches.
14. Dimmers.
15. Control devices.
16. Transformers.
17. Inverters.
18. Rectifiers.
19. Frequency converters.
20. Battery racks.
21. Power-generating units.
22. Telephone switching equipment.
23. Clock/program master equipment.
24. Call system master station.
25. TV/audio-monitoring master station.
26. Fire alarm master station or control panel.
27. Security-monitoring master station or control panel.

END OF SECTION 260532



SECTION 260533
RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide raceways, fittings, supporting devices, boxes and accessories required for a completely installed system and its proper operation.
- B. Coordinate layout and installation of raceways, boxes, enclosures, cabinets, and suspension and support system with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, fire-suppression system, and partition assemblies.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Firestopping/Smoke Seals..... Section 078400

1.03 SUPPLEMENTAL SUBMITTALS

- A. Submit a Product Schedule indicating the item description and manufacturer name. The Schedule will be accepted by the Commissioner for record purposes only, provided that the items are in full compliance with the Specifications.
- B. Certificates
 - 1. Provide affidavit stating that all items used are UL listed and meet the specifications.
- C. Coordination drawings for conduit buried in concrete slabs, conduit in the ground and service entrance conduit. Provide conduit routing plan, drawn to scale, showing structural members, architectural features, HVAC and P&D items.



PART 2 - PRODUCTS

2.01 RACEWAYS

- A. Rigid Galvanized Conduit (RGC)
 - 1. Steel conduit, Schedule 40, hot dipped galvanized, with Underwriters Laboratories label stamped on each length.
- B. Electric Metallic Tubing (EMT)
 - 1. Industry standard conduit with Underwriters Laboratories label stamped on each length.
- C. Flexible Metal Conduit (FMC)
 - 1. Galvanized steel conduit, Underwriter Laboratories listed.
- D. Liquid-tight Flexible Metal Conduit (LTFMC)
 - 1. Industry standard conduit, Underwriter Laboratories listed.
- E. Surface Metal Raceway
 - 1. Raceway and all components shall be listed by Underwriters Laboratories and they shall be as manufactured by Mono-Systems, Hubbell Inc. or Wire Mold Co. Single Channel (minimum): Wire Mold V700, Hubbell Inc. 750 Series or Mono-Systems SMS700. Dual Channel: Wiremold V4000, Wiremold DS4000 Series, Hubbell Inc. 4000 Series or Mono-Systems SMS4200. The metal raceway shall be of a two-piece design with a base and snap-On cover.

2.02 SUPPORTING DEVICES

- A. Hangers
 - 1. Separate hangers shall be installed for supporting conduits. Wherever possible hangers shall be supported from concrete slab by inserts.
 - 2. Hangers and piping installed by other trades shall not be used for supporting electric conduits.



- B. Individual and multiple pipe hangers and riser clamps including all parts and hardware shall be hot-dipped galvanized throughout. All U-bolts, clamps, attachments and hardware for hanger assembly and conduits shall be provided. Each multiple hanger shall be designed to support a load equal to or greater than the sum of the weights of the conduits, wires and hanger itself, plus 200 pounds.
- C. Use pipe straps and specified method of attachment where conduit is installed proximate to surface of steel stud or masonry construction.
 - 1. Use hangers secured to surface with specified method of attachment where conduit is suspended from the surfaces.
- D. Use "C" beam clamps and hangers where conduit is supported from steel beams.
- E. Use deck clamps and hangers to support conduits from steel decking having hanger tabs. One conduit per tab is permitted.
 - 1. Where conduit is supported from steel decking which does not have hanger tabs, use clamps and hangers secured to decking, utilizing specified method of attachment.
- F. Use channel support system supported from structural steel for multiple parallel conduit runs.
- G. Where conduits are installed above ceiling, do not rest conduit directly on runners bars, T-Bars, etc.
 - 1. Conduit Sizes 2-1/2" and Smaller: Support conduit from ceiling supports or from construction above ceiling.
 - 2. Conduit Sizes Over 2-1/2": Support conduit from beams, joist, or trusses above ceiling.
- H. Conduits shall be supported within three (3) feet of any kind of fitting and at every outlet or junction box, panel, etc. This shall apply to both horizontal and vertical runs.

2.03 BOXES AND ENCLOSURES

- A. The Contractor shall provide outlet boxes and enclosures appropriate for the purpose at all locations where the Drawings require the installation of electrical devices or electrical equipment. For exposed conduit systems, the contractor shall use cast outlet boxes in all locations below



8'-0" with number of threaded hubs equal to the number of conduits, except when installing surface metal raceway contractor shall provide boxes from the same manufacturer of the surface metal raceway.

- B. Where the Contractor selects and installs an item of equipment that requires additional boxes, fittings, etc., or a modification of the conduit system indicated on the Drawings, such additional boxes, fittings, etc. shall be furnished and installed and such modifications shall be performed by the Contractor as part of this Contract, without extra compensation from the City of New York.

2.04 FITTINGS AND ACCESSORIES

- A. All fittings and accessories shall be UL listed and compatible with selected raceways and suitable for use location. Compression fittings shall be provided with the installation of EMT.

2.05 CONDUIT SIZES

- A. Where conduit is required to be installed, its nominal diameter shall be not less than 3/4 inch.
- B. For conduit placed in metal deck slabs, the maximum size is 1".
- C. For conduit placed in 4" formed slabs, the maximum size is 3/4" and 1" for slabs greater than 4".

2.06 SLEEVES FOR CONDUIT

- A. Provide sleeves, Schedule 40, galvanized steel, for all electrical conduits and wiring passing through foundation, floors, roofs, beams. Provide as specified herein:
 - 1. Sleeves passing through fire-rated walls, floors, roofs, ceilings, and other areas where indicated: the space between sleeve and pipe/conduit shall be firestopped to comply with fire-rating of assembly through which it passes.

PART 3 - EXECUTION

3.01 RACEWAY SCHEDULE



- A. Rigid Galvanized Steel Conduit (RGC)
 - 1. Provide RGC as follows:
 - a. All outdoor raceway.
 - b. Concrete encased and exposed.

- B. Electrical Metallic Tubing (EMT)
 - 1. Provide EMT for feeders and branch circuits for power, lighting and low voltage systems.

- C. Metal Clad Cable (MC)
 - 1. Provide MC for branch circuit in concealed installation within hung ceiling and gypsum board partitions.

- D. Flexible Metal Conduit (FMC)
 - 1. Provide FMC for final conduit connection to:
 - a. Recessed lighting fixtures in suspended ceilings.
 - b. Emergency lighting battery units.
 - c. Motors
 - d. Equipment subject to vibration (dry locations).
 - e. Equipment requiring flexible connections for adjustment or alignment (dry locations).
 - 2. In all cases, install equipment-grounding conductor in the flexible raceway and bond at each box or equipment to which flex is connected.
 - 3. Grounding conductors are not shown on the Drawings but shall be included within each branch and main circuit feeder.

- E. Surface Metal Raceway
 - 1. Provide surface metal raceway in finished spaces.
 - a. Secure raceway of one-piece type every 36" alternately with one-hole straps, and support



clips (strap, support clip, strap, etc.). Secure raceway of two-piece type every 36" alternately with straps and fasteners through back of raceway (strap, fastener through back, strap, etc.).

- b. Install separate grounding conductor. Grounding conductors for surface metal raceways are not shown on the Drawings.

F. Liquid-tight Flexible Metal Conduit (LFMC)

- 1. Provide LFMC for final conduit connection to:
 - a. Motors and Equipment subject to vibration in damp and wet locations and for Kitchen appliances.
 - b. Equipment requiring flexible connection for adjustment or alignment in damp and wet locations.

3.02 RACEWAY INSTALLATION

A. General

- 1. Keep raceways at least 6 inches away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- 2. All conduit systems shall be mechanically and electrically continuous.
- 3. The ends of all conduit shall be square, carefully reamed out to full size, shouldered in the fittings, and bushed or capped wherever stubbed clear of the building.
- 4. Not more than four (4) 90 degree ells or bends or the equivalent shall be used in any single run of conduit. Conduits for telephone, television, video surveillance or data cable shall not have more than two (2) 90 degree bends or the equivalent. Where more bends are necessary, provide suitable code size pull boxes or fittings. All conduits for telephone, television, video surveillance or data systems cable shall have large radius bends. Pull boxes shall be installed in accessible locations.
- 5. Conduit installed on equipment shall not obstruct any removable panel, access door, or control. Control apparatus, outlet, junction, and pull boxes shall be



- installed so as not to interfere with any piping, fixtures, or equipment.
6. Complete raceway installation before starting conductor installation.
 7. Conceal conduit and EMT within finished walls, ceilings, and floors, unless otherwise indicated.
 - a. Install concealed raceways with a minimum of bends in the shortest practical distance, considering type of building construction and obstructions, unless otherwise indicated.
 8. Conduits installed across seismic separations (expansion joints) shall include, but not limited to, the following:
 - a. The conduit (rigid steel or EMT) shall be securely anchored on each side of the seismic separation with a pipe hanger per SMACNA details.
 - b. The spacing between conduit ends shall be 36" minimum.
 - c. A liquid-tight flexible metal conduit of the same size shall be installed between the conduit ends spanning the seismic separation.
 - d. The liquid-tight flexible metal conduit shall be of sufficient length to provide for a longitudinal and axial deflection of two (2)-inches minimum in all directions.
 9. Terminations:
 - a. Where raceways are terminated with locknuts and bushings, align raceways to enter squarely and install locknuts with dished part against box. Use two locknuts, one inside and one outside box.
 - b. Where raceways are terminated with threaded hubs, screw raceways or fittings tightly into hub so end bears against wire protection shoulder. Where chase nipples are used, align raceways so coupling is square to box tighten chase nipple so no threads are exposed.



- 10. Install pull wires in empty raceways. Use polypropylene or monofilament plastic line with not less than 200-lb (90-kg) tensile strength. Leave at least 12 inches (300 mm) of slack at each end of pull wire.
- 11. Rooftop conduits (rigid steel) shall be neatly grouped and installed parallel to the building lines. Support conduits on minimum 4 inches x 6 inches on pressure treated lumber sleepers at minimum 5 feet spacing.

B. Exposed conduits

- 1. Exposed conduits shall be rigidly fastened to structure, or to rigid hangers or angle irons connected to structure at intervals not exceeding eight feet. Where the conduits or surface metal raceways are installed exposed, they shall follow the architectural lines of the enclosure and shall be run as to be as inconspicuous as possible. Conduits or surface metal raceways shall not be installed diagonally on ceilings, walls or columns.

C. Conduit Installed Concealed in Existing Building

- 1. Where new partition walls and new hung or furred ceilings are being erected or where existing walls are to have a new tile finish, the conduits and related equipment shall be installed concealed in walls and in hung or furred ceilings.

3.03 CONDUIT TO MOTORS, TABLES, ETC. IN SHOPS AND OTHER ROOMS

- A. Flexible Connections: Use maximum of 72 inches (1830 mm) of flexible conduit for recessed and semi recessed lighting fixtures; for equipment subject to vibration, noise transmission, or movement; and for all motors. Install separate ground conductor across flexible connections.

3.04 MOUNTING DEVICES

A. Height of Wall Outlets

- 1. Unless otherwise indicated, locate outlet boxes with their center lines at the following elevations above finished floor:

Alarm Indicating Devices	8'-0" to center where ceiling height allows a minimum of 2" clearance between ceiling
--------------------------	---



	and top otherwise mount so that its top is 2" below finished ceiling.
Exit Lights (N/A)	8'-0" where ceiling height allows a minimum of 6" clearance between ceilings and top light, otherwise mount exit light so that its top is 6" below finished ceiling. Adjust height and clearances as required to suit installation over doors.
Indicators	8'-0" AFF.
Fire Alarm Strobe Lights	80" A.F.F. or 6" below the ceiling whichever is lower
Manual Fire Alarm Boxes	3'-6" (4'-0" if 3'-6" is not possible)
Single & Duplex Receptacles	1'-6"
Special Purpose Receptacles	As indicated on the Drawings.
Switches	4'-0"
Telephone (N/A)	1'-6"

3.05 PAINTING

- A. All exposed raceways and boxes in finished parts of the building shall be painted. Painting shall consist of a prime coat and a finished coat, color as selected by project architect. Factory painting will be accepted as a prime coat.

END OF SECTION 260533



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 262419
MOTORS, STARTERS,
AND CONTROL EQUIPMENT

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide and make final connections to all motors, motor control centers, starters and accessories, connect equipment furnished under other Sections of the Specifications. Including but not limited to equipment furnished and installed by other trades.
- B. Obtain all wiring diagrams and other information furnished by the manufacturer of the equipment. Coordinate and supplement the wiring diagrams and schedules with any additional function of operational requirements specified in other Sections of the Specifications. Provide control equipment to execute the sequence of operation.

1.02 REFERENCES

- A. NEMA MG-1 - Motors and Generators
- B. NEMA ICS - General Standards for Industrial Control and Systems

1.03 SUPPLEMENTAL SUBMITTALS

- A. Submittal Package
 - 1. Submit product data for motors and starters as a package.
- B. Product Data:
 - 1. For each type of controller and each type of motor-control center. Include dimensions and manufacturer's technical data on features, performance, electrical characteristics, ratings, and finishes.
- C. Shop Drawings: For each starter and motor-control center.
 - 1. Dimensioned plans, elevations, sections, and details,



including required clearances and service space around equipment. Show tabulations of installed devices, equipment features, and ratings. Include the following:

- a. Each installed unit's type and details.
 - b. Nameplate legends.
 - c. Short-circuit current ratings of buses and installed units.
 - d. Vertical and horizontal bus capacities.
 - e. UL listing for series rating of overcurrent protective devices in combination controllers.
 - f. Feature, characteristics, ratings, and factory settings of each motor-control center unit.
 - g. Wiring Diagrams: Power, signal, and control wiring for class and type of motor-control center. Differentiate between manufacturer-installed and field-installed wiring. Provide schematic wiring diagram for each type of controller.
- D. Coordination Drawings: Floor plans showing dimensioned layout, required working clearances, and required area above and around motor-control centers where pipe and ducts are prohibited.
- E. Field Test Reports: Written reports specified in Part 3.
- F. Manufacturer's field service report.
- G. Maintenance Data: For starters and motor-control centers, all installed devices, and components to include in maintenance manuals specified DDC General Conditions. In addition to requirements specified in DDC General Conditions Section "Closeout Procedures," include the following:
1. Routine maintenance requirements for motor-control centers and all installed components.
 2. Manufacturer's written instructions for testing and adjusting overcurrent protective devices.
- H. Load-Current and Overload-Relay Heater List: Compile after motors have been installed and arrange to demonstrate that selection of heaters suits actual motor nameplate full-load currents.
- I. Load-Current and List of Settings of Adjustable Overload Relays: Compile after motors have been installed and arrange to demonstrate that dip switch settings for motor running overload protection suit actual motor to be protected.



1.04 QUALITY ASSURANCE

- A. Source Limitations: Obtain LonWorks compatible controllers of a single type through one source from a single manufacturer. Where LonWorks compatible controllers are not available from the unit manufacturer, provide "gateway" to translate the unit manufacturer's protocol to the LonTalk protocol.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by UL and other agency acceptable to FDNY.
- C. Comply with NFPA 70.
- D. The product manufacturer shall have test facilities available that can demonstrate that the proposed products meet the contract requirements.
 - 1. Make arrangements with the test facility for the Commissioner to witness test demonstrations. Also obtain the services of the Company Field Advisor for the proposed product to be present at the test facility. Notify the Commissioner a minimum of 3 weeks prior to the availability of the test facility, and provide at least one alternative date for the testing.
- E. Provide written certification from the manufacturer that the proposed products are compatible for use with all other equipment proposed for use for this system and meet all contract requirements.
- F. Harmonic Analysis:
 - 1. The adjustable speed motor controller manufacturer shall perform a harmonic current magnitude and voltage distortion analysis and provide certified calculations specific to this installation, showing that the total harmonic distortion caused by the adjustable speed motor controller will be below the specified level. The analysis shall be accordance with IEEE 519.
 - 2. The results shall be based on a computer aided/modeled circuit simulation of the actual system, based upon the materials and equipment proposed to be furnished and installed.

1.05 COORDINATION

- A. Coordinate layout and installation of starters and motor-control centers with other construction including conduit, piping, equipment, and adjacent surfaces. Maintain required



workspace clearances and required clearances for equipment access doors and panels.

- B. Coordinate size and location of concrete bases. Cast anchor-bolt inserts into bases.
- C. Coordinate installation of roof curbs, equipment supports, and roof penetrations.
- D. Coordinate features of motor-control centers, installed units, and accessory devices with pilot devices and control circuits to which they connect.
- E. Coordinate features, accessories, and functions of each motor-control center, each controller, and each installed unit with ratings and characteristics of supply circuit, motor, required control sequence, and duty cycle of motor and load.

PART 2 - PRODUCTS

2.01 MOTORS

- A. Motor (Nameplate) Voltage
 - 1. 120/208 Volt, Three Phase, 4 Wire Incoming Service
 - a. Motors less than 1/2 HP: NEMA standard motor voltage 115V single phase, 60 Hz.
 - b. Motors 1/2 HP and larger: NEMA standard motor voltage 208V, three phase, 60 Hz.
 - 2. 277/480 Volt, Three Phase, 4 Wire Incoming Service
 - a. Motors 1/2 HP and larger: NEMA standard motor voltage 460V, three phase, 60 Hz.
- B. Single phase motor shall be capacitor start, open drip-proof unless otherwise noted.
- C. Three-phase motors shall be squirrel-cage, open drip-proof unless otherwise noted.
- D. Motors in general shall have cast iron frame, full voltage starting.
- E. Drawings shall indicate horsepower, voltage and RPM.
- F. Temperature rise and insulation system class shall conform to NEMA standards.



- G. Motors shall be of the highest grade manufactured by: Allis Chalmers Mfg. Co., Baldor Electric Co., Century Electric Co., Continental Electrical Motors Co., General Dynamics Corps., Howell Electric Motors Co., Imperial Electric Co., Peerless Electric Co., Reliance Electric & Engineering Co., Wagner Electric Corp., or Westinghouse Electric & Mfg. Co., or approved equal.
- H. Motor nameplate data shall be in accordance with NEMA Standards.

2.02 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Starters:
 - a. Eaton Corp.; Cutler-Hammer Products.
 - b. General Electrical Distribution & Control.
 - c. Rockwell Automation Allen-Bradley Co.; Industrial Control Group.
 - d. Approved equal.

2.03 MAGNETIC MOTOR STARTERS

- A. Description: NEMA ICS 2, Class A, full voltage, nonreversing, across the line, unless otherwise indicated.
- B. Control Circuit: 120 V
- C. Combination Starter: Factory-assembled combination starter and disconnect switch.
 - 1. Fusible Disconnecting Means: NEMA KS 1, fusible switch with rejection-type fuse clips rated for fuses. Select and size fuses to provide Type 2 protection according to IEC 947-4-1, as certified by a nationally recognized testing laboratory.
 - 2. Nonfusible Disconnecting Means: NEMA KS 1, nonfusible switch.
 - 3. Circuit-Breaker Disconnecting Means: NEMA AB 1, motor-circuit protector with field adjustable, short-circuit trip coordinated with motor locked-rotor amperes.
- D. Overload Relay: Ambient-compensated type with inverse-time-current characteristic. Provide with heaters or sensors in each phase matched to nameplate full-load current of specific



motor to which they connect and with appropriate adjustment for duty cycle.

- E. Star-Delta Controller: NEMA ICS 2, closed transition with adjustable time delay.

2.04 VARIABLE-FREQUENCY DRIVES

- A. Description: Provide for non-packaged systems conforms to NEMA ICS 2, NFPA and IEC standards, pulse-width-modulated, variable-frequency drive; listed and labeled as a complete unit and arranged to provide variable speed of a NEMA MG 1, Design B, 3-phase, induction motor by adjusting output voltage and frequency.
- B. Design and Rating: Match load type such as fans, blowers, and pumps; and type of connection used between motor and load such as direct or through a power-transmission connection.
- C. Isolation Transformer: Match transformer voltage ratings and capacity to system and motor voltages; and controller, motor, drive, and load characteristics. Add 3% line reactor on the line side or 5% line reactor on the load side of the drive.
- D. Output Rating: 3-phase 60 Hz, with voltage proportional to frequency throughout voltage range.
- E. Starting Torque: 100 percent of rated torque or as indicated.
- F. Speed Regulation: Plus or minus 1 percent.
- G. Thermal management system for operation in extreme Temperature: 14° F to 122° F (-10° C to 50° C).
- H. Efficiency: 95 percent minimum at full load and 60 Hz.
- I. Minimum Displacement Power Factor at Input Terminals: 95 percent.
- J. Isolated control interfaced allows controller to follow control signal over an 11:1 speed range.
 - 1. Electrical Signal: 4 to 20 mA at 24 V.
- K. Internal Adjustability: Include the following internal adjustment capabilities:
 - 1. Minimum Speed: 5 to 25 percent of maximum rpm.
 - 2. Maximum Speed: 80 to 100 percent of maximum rpm.
 - 3. Acceleration: 2 to 22 seconds.



4. Deceleration: 2 to 22 seconds.
 5. Current Limit: 50 to 110 percent of maximum rating.
- L. Multiple-Motor Capability: Controller suitable for service to multiple motors and having a separate overload relay and protection for each controlled motor. Overload relay shall shut off the controller and motors served by it when overload relay is tripped.
- M. Self-protection and reliability features shall include the following:
1. Input transient protection by means of surge suppressors.
 2. Add 5% line reactors.
 3. Motor Overload Relay: Adjustable and capable of NEMA 250, Class 10 performance.
 4. Notch filter to prevent operation of the controller-motor-load combination at a natural frequency of the combination.
 5. Instantaneous overcurrent trip.
 6. Loss-of-phase protection.
 7. Reverse-phase protection
 8. Under-and overvoltage trips.
 9. Over temperature trip.
 10. Short-circuit protection.
 11. Under-voltage ride-thru qualified to the SEMI-47 standard.
- N. Automatic Reset/Restart: Attempt three restarts after controller fault or on return of power after an interruption and before shutting down for manual reset or fault correction. Restarting during deceleration shall not damage controller, motor, or load.
- O. Power-Interruption Protection: Prevents motor from re-energizing after a power interruption until motor has stopped.
- P. Status Lights: Door-mounted LED indicators shall indicate the following conditions:
1. Power on
 2. Run
 3. Overvoltage
 4. Line fault
 5. Overcurrent
 6. External fault



- Q. Panel-Mounted Operator Station: Start-stop and auto-manual selector switches with manual speed control potentiometer and elapsed time meter.
- R. Indicating Devices: Meters or digital readout devices and selector switch, mounted flush in controller door and connected to indicate controller output current, voltage, and frequency.
- S. Manual Bypass: Magnetic contactor shall be arranged to safely transfer motor between controller output and bypass controller circuit when motor is at zero speed. Controller-off-bypass, selector-switch indicator lights set and indicate mode selection.
- T. Integral Disconnecting Means: NEMA KS 1, fusible switch with lockable handle.
- U. Bypass Controller: NEMA ICS 2, full-voltage, nonreversing controller with across-the-line starting capability in manual-bypass mode. Provide motor overload protection under both modes of operation with control logic that allows common start-stop capability in either mode.
- V. Isolating Switch: Non-load-break switch arranged to isolate variable-frequency controller and permit safe troubleshooting and testing, both energized and de-energized, while motor is operating in bypass mode.
- W. Remote Indicating Circuit Terminals: Mode selection, controller status, and controller fault.
- X. RFI filters: The drives shall be provided with RFI filters that use a combination of high frequency inductors and capacitors to reduce noise in the critical 150 kHz to 30 MHz frequency range while allowing the lower power line frequencies to pass unaltered. The drive shall be sized to consider any voltage drop resulting from the filter.

2.05 FEEDER OVERCURRENT PROTECTION

- A. Thermal-Magnetic Circuit Breakers: Inverse time-current element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
- B. Fusible Switch: NEMA KS 1, Type HD, clips to accommodate specified fuses with lockable handle.



2.06 FACTORY FINISHES

- A. Finish: Manufacturer's standard paint applied to factory-assembled and tested controllers before shipping.

2.07 MANUAL ENCLOSED STARTERS

- A. Description: NEMA ICS 2, general purpose, Class A, with toggle action and overload element.

2.08 MAGNETIC ENCLOSED STARTERS

- A. Description: NEMA ICA 2, Class A, full voltage, nonreversing, across the line, unless otherwise indicated.
- B. Control Circuit: 120 V
- C. Combination starter: Factory-assembled combination starter and disconnect switch.
 - 1. Fusible Disconnecting Means: NEMA KS 1, fusible switch with rejection-type fuse clips rated for fuses.
 - 2. Nonfusible Disconnecting Means: NEMA KS 1, nonfusible switch.
 - 3. Circuit-Breaker Disconnecting Means: NEMA AB 1, motor-circuit protector with field adjustable, short-circuit trip coordinated with motor locked-rotor amperes.
- D. Overload Relay: Ambient-compensated type with inverse-time-current characteristic. Provide with heaters or sensors in each phase matched to nameplate full-load current of specific motor to which they connect and with appropriate adjustment for duty cycle.
- E. Motor Control Push Button Stations and H-O-A Switches
 - 1. Provide push button stations of the momentary contact type with pilot light, installed with a common faceplate.
 - 2. Provide "Hand-Off-Automatic" (H-O-A) switches for all starters controlling equipment with automatic actuating apparatus.

2.09 PUSHBUTTON STATIONS

- A. Normal Duty



1. Momentary Start-Stop with pilot light in NEMA 1 enclosure.

2.10 KEY-OPERATED CONTROL STATION

- A. Key-operated control station shall be pushbutton stop, key-operated reset type. Control station (DC) shall be ASCO cat. # 216B89 in conjunction with pushbutton control stations ASCO 173A19 (flush mounting) or ASCO 173A20 (surface mounting), or approved equal of Square D.
- B. Key-operated control station shall enable shutting down power panels in case of emergency and shall reset the power "on" by means of a key.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. For control equipment at walls, bolt units to wall or mount on lightweight structural-steel channels bolted to wall. For controllers not at walls, provide freestanding racks.
- B. Install freestanding equipment on concrete bases.
 1. The arrangement and mounting of all control equipment shall be such, that the handle of the safety switch will be easily operable from the floor, at approximately 5'-0" mounting height.
 2. Manually operated control equipment shall have handles or push buttons 4-feet from floor, unless otherwise noted on Drawings.
 3. Provide a white core phenolic nameplate on all motor control equipment.
- C. In general, roof fan motor circuit wiring is run to starters in grouped locations. Starters shall be mounted on steel framework where shown on Drawings.

Pilot light assemblies shall be installed in the covers of respective starters
- D. Connect hand-off-automatic switch and other automatic-control devices where available.
 1. Connect selector switches to bypass only manual-and automatic-control devices that have no safety functions when switch is in hand position.



2. Connect selector switches with motor-control circuit in both hand and automatic positions for safety-type control devices such as low-and high-pressure cutouts, high-temperature cutouts, and motor overload protectors.
 3. For each motor automatically and/or manually controlled or monitored by the fire alarm system, include control wiring extensions as specified as part of the fire alarm system to an adjacent FPA addressable module.
 4. For each motor supplied by a VFD, run 2 #14 from the disconnect switch at the motor to the VFD, and connect so as to de-energize "start circuit" when switch is open. Run with power circuitry or in separate raceway.
 5. Control wiring for single phase HVAC motors with manual controllers shall be provided as part of the electrical work. For each such motor, provide wiring and connect to all outlying control devices as directed. Refer to GHAC drawings and specifications for quantities and locations.
- E. Control wiring for plumbing motors will be provided as part of the work of Division 23 as applicable.
- F. Control wiring shall be accomplished utilizing #14 AWG copper conductor with THWN installation.
- G. Nameplates

Identify starters, motor-control center, motor-control center components, and control apparatus wiring.

Identify each pushbutton station and motor starter. Identify each interlock switch, indicating purpose of switch.

1. NEMA 1 Enclosures: Rivet or bolt nameplate to the cover
2. NEMA 3R, 4, 4X, 7, or 9 Enclosures: Attach name-plates to the cover using adhesive specifically designed for the purpose.

3.02 FIELD TESTS

- A. Perform tests, in the presence of the Commissioner to demonstrate:
1. That each control device and its related motor starter operate properly.
 2. That each overload and undervoltage protection safety device functions properly.
 3. That each safety shut-off valve and device operates properly.



- B. Tests shall be performed in accordance with the equipment manufacturers' start-up and field test instructions and made jointly with all relevant trades.
- C. Should the tests reveal any defects, promptly correct such defects and rerun the tests until the entire installation is satisfactory in all respects.
- D. Tests shall be coordinated by the Contractor who shall provide (48) hrs. min. notice to the Commissioner for approval of schedule.

3.03 INSTRUCTION

- A. Engage a factory-authorized service representative to instruct City of New York maintenance personnel to adjust, operate, and maintain motor-control centers.
 - 1. Instruct City of New York maintenance personnel on procedures and schedules for starting and stopping, troubleshooting, servicing, and maintaining equipment and schedules.
 - 2. Review data in maintenance manuals.

END OF SECTION 262419



SECTION 262726
WIRING DEVICES

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 SUBMITTALS

- A. Product Data: Catalog sheets, specifications, and installation instructions.

PART 2 PRODUCTS

2.01 SWITCHES

- A. Local Switches, Single Pole:
- 15A, 120/277 V ac; Bryant's 4801, Crouse-Hinds/AH's 1891, Hubbell's 1201/1101, Leviton's 1201/1101, Pass & Seymour's 15AC1, Woodhead's 1891.
 - 20A, 120/277 V ac; Bryant's 4901, Crouse-Hinds/AH's 1991, Hubbell's 1121/1221, Leviton's 1121/1221.
 - Or approved equal.

2.02 RECEPTACLES

- A. Specification Grade Receptacles:
- Duplex receptacle, NEMA 5-15R (15A, 125 V, 2P, 3W); Bryant's 5252/5242, Crouse-Hinds/AH's 5252/5242, Hubbell's 5252/5242, Leviton's 5252/5242.
 - Duplex receptacle, NEMA 5-20R (20A, 125 V, 2P, 3W); Bryant's 5362, Crouse-Hinds/AH's 5352/5342, Hubbell's 5352, Leviton's 5352.
 - Or approved equal.
- B. Ground Fault Interrupter Receptacles:
- Duplex receptacle rated 15A (NEMA 5-15R), circuit-ampacity 20A; Bryant's GFR52FT, Crouse-Hinds/AH's GF5242, Hubbell's GF5252, Leviton's 6599.
 - Duplex receptacle rated 20A (NEMA 5-20R), circuit ampacity 20A; Bryant's GFR53FT, Crouse-Hind/AH's GF5342, General Electric's GF5342, Hubbell's GF 5352, Leviton's 6899.
 - Or approved equal.



2.03 WALL PLATES

- A. Brass Wall Plates: .040-inch-thick brass with brush brass finish; Bryant's 518 Series, Hubbell's B 26 Series or 97 Series, Leviton's 81 Series.
- B. Stainless Steel Wall Plates: Type 302 stainless steel with satin finish; Bryant's 93 Series, Crouse-Hinds/AH's 93 Series, Hubbell's 97 Series, Leviton's 910-40 Series.
- C. Weatherproof Covers: Hubbell's WP826 MHP BOX, Other Manufacturers : Hubbel, Leviton, or approved equal
- D. Covers for Threaded Type Boxes: Stamped sheet steel, gasketed device covers as produced by Crouse-Hinds Co., or OZ/Gedney Co.
- E. Or approved equal.

2.04 EMERGENCY SHUTDOWN SWITCHES

- A. Emergency Shutdown Pushbutton Switch:
Square D. Co.'s, or approved equal, Class 9001, K 15 operator with the following:
 - 1. Legend red plate with words "Emerg. Stop".
 - 2. NEMA 13 oil tight enclosure with cover screwed to box contact block - heavy duty "K" DPDT.Other Manufacturers: Bradley, UTL, or approved equal.

2.05 NAMEPLATES

- A. Phenolic Type: Standard phenolic nameplates with 3/16 inch minimum size lettering engraved thereon.
- B. Embossed Aluminum: Standard stamped or embossed aluminum tags, 3/16 inch minimum size lettering, as produced by Seton Name Plate Corp., Tech Products Inc., Mila Displays, inc., or approved equal.

PART 3 EXECUTIONS

3.01 INSTALLATION

- A. Install wiring devices in outlet boxes.
- B. Local Switches:



1. Install local switches rated 15A, 120/277 V ac for switches unless otherwise shown on the drawings or specified.
 2. Install switches indicated Sa, Sb, Sc, etc, for control of outlets, with corresponding letters on the same circuit.
 3. Where more than one switch occurs at same location in a 120-volt system, arrange switches in gangs and cover with one face plate.
 4. Install switches in a 277-volt system in separate single boxes if voltage between exposed live metal parts of adjacent switches exceeds 300 volts.
 5. Install single and double pole switches so that switch handle is up when switch is in the "On" position.
- C. Receptacles:
1. Install Specification Grade receptacles, NEMA 5-15R, 15A, 125 V, 2P, 3W, for duplex receptacles and single receptacles unless otherwise shown on the drawings or specified.
 2. Install receptacles with ground pole in the down position.
- D. Wall Plates:
1. Install wall plates on all wiring devices in dry locations, with finish to match hardware in each area.
 2. Install blank wall plates on outlet boxes which are for future equipment except telephone outlets.
 3. Install 5/8-inch bushed wall plates on telephone outlets.
 4. Fasten wall plates with vandal resistant screws in patients' area. Deliver 10 screw keys to the facility.
 5. Fasten wall plates with vandal resistant screws in offices and public access areas. For all other locations pop rivet wall plates to the wiring devices. Deliver 10 screw keys to the facility.
- E. Weatherproof Covers: Install weatherproof covers on wiring devices in damp and wet locations.
- F. Nameplates: Provide phenolic or embossed aluminum nameplate for each special purpose receptacle indicating phase, ampere, and voltage rating of the circuit. Attach nameplate with rivets or tamperproof fasteners to wall plate or to wall above receptacle. Wall plates may be engraved with required data in lieu of separate nameplates.
- G. Mats: Where flush plates are required over outlet boxes that cannot be set deep enough for the plates to fit closely over the finished wall surfaces, provide oak mats



to fill the space between the finished wall surface and the plate.

3.02 QUALITY ASSURANCE

- A. Wire manufactured over one year prior to delivery to the site will not be accepted.
- B. Tapes for splices or termination shall be dated by the tape manufacturer to indicate that they have been manufactured no longer than six months prior to use in the Work of this Section.

3.03 DELIVERY, STORAGE, AND HANDLING

- A. Conductors shall be delivered at the building in original packages or on reels, and shall have the tag of the manufacturer attached thereto indicating: Contractor's name, Project title and number, Date of manufacturing.
- B. Store material in a clean, dry space and protect from weather.

END OF SECTION 262726



SECTION 262812
SAFETY SWITCHES

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 SUBMITTALS

- A. Product Data: Catalog sheets, specifications and installation instructions.

PART 2 PRODUCTS

2.01 SAFETY SWITCHES (SINGLE THROW)

- A. NEMA 1, 3R, : Heavy Duty Series, Cutler-Hammer Inc.'s DH, General Electric Co.'s Type H, Square D Co.'s Heavy Duty Series, or Westinghouse Electric Corp.'s H-600, or approved equal having:
1. Fuses, or unfused as indicated on drawings.
 2. Fused switches equipped with fuses.
 3. NEMA 1 enclosure unless otherwise indicated on drawing.
 4. 240V rating for 120V, 208V, or 240V, circuits.
 5. 600V rating for 277V, or 480V circuits.
 6. Solid neutral bus when neutral conductor is included with circuit.
 7. Ground bus when equipment grounding conductor is included with circuit.
 8. Current rating and number of poles as indicated on drawings.

2.02 NAMEPLATES

- A. General: Precision engrave letters and numbers with uniform margins, character size minimum 3/16 inch high.
1. Phenolic: Two color laminated engravers stock, 1/16 inch minimum thickness, machine engraved to expose inner core color (white).
 2. Aluminum: Standard aluminum alloy plate stock, minimum .032 inches thick, engraved areas enamel filled or background enameled with natural aluminum engraved characters.



3. Materials for Outdoor Applications: As recommended by nameplate manufacturer to suit environmental conditions.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install switches so that the maximum height above the floor to the center of the operating handle does not exceed 5'-6".
- B. Identify each safety switch, indicating purpose or load served:
 1. NEMA 1 Enclosures: Rivet or bolt nameplate to the cover.
 2. NEMA 12 Enclosures: Rivet or bolt and gasket nameplate to the cover.
 3. NEMA 3R: Attach nameplate to the cover using adhesive specifically designed for the purpose, or mount nameplate on wall or other conspicuous location adjacent to switch. Do not penetrate enclosure with fasteners.
- C. Paint switches used for the fire protective signaling system with red paint and identify - "FIRE ALARM CIRCUIT CONTROL".
- D. Paint switches used for oil burner emergency switch with red paint and identify "OIL BURNER".

END OF SECTION 262812



SECTION 265200
EMERGENCY LIGHTING - UNIT EQUIPMENT

PART 1 GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.01 DESCRIPTION OF WORK

- A. Provide raceways, fittings, supporting devices, boxes and accessories required for a complete system and its proper operation.
- B. Coordinate layout and installation of raceways, boxes, enclosures, cabinets, and suspension system with other Submittal Package: Submit the product data items specified below at the same time as a package.

1.02 RELATED WORK SPECIFIED ELSEWHERE

- A. Division 26 Sections.

1.03 SUPPLEMENTAL SUBMITTALS

- A. Submit Product Data to be accepted by the Commissioner:
 - 1. Catalog sheets, specifications and installation instructions.
 - 2. Battery warranty.
 - 3. Name, address and telephone number of nearest fully equipped service organization.
 - 4. Certificates: affidavit stating all items used are UL listed and meet the specifications.
- B. Project Closeout Submittals:
 - 1. Operation and Maintenance Data: Deliver 2 copies, covering the installed products, to the Commissioner. Include name, address and telephone number of the nearest fully equipped service organization.

PART 2 PRODUCTS

2.01 GENERAL



- A. Products:
 - 1. Lithonia
 - 2. Cooper Lighting
 - 3. Dual Lite
 - 4. Emergi-Lite
 - 5. Or approved equal.
- B. Voltage: 120-V ac.
- C. Mounting: as shown on drawings

2.02 EMERGENCY LIGHTING UNITS

- A. Complete interior emergency lighting units, with features, options, and accessories as scheduled
- B. Lithonia, type ELTNY:
 - 1. INTENDED USE: Ideal for New York applications where steel housing emergency lighting is required.
 - 2. CONSTRUCTION: 20-gauge steel housing. Off-white powdered coat finish or color to match existing. Aluminum lamp heads with PAR36 style lamps. Dual-voltage input capacity (120 or 277 volts).
 - 3. BATTERY: Maintenance-free lead-calcium battery provides 16 watts (ELT618NY), 24 watts (ELT627NY) or 36 watts (ELT1250NY) rated capacity for 1-1/2 hours. Test switch and dual function ready/charge light (red) permit check of system operation. Low-voltage disconnect prevents excessively deep discharge that can permanently damage the battery. Slip-on battery terminals.
 - 4. ELECTRONICS: Current-limiting charger maximizes battery life and minimizes energy consumption. Provides low operating costs. Brownout protection.
 - 5. LISTINGS: UL listed. Meets UL 924, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards.
 - 6. WARRANTY: Three-year total warranty.
- C. Dual-Lite Type AS: AS-80-AHDSBO607
- D. Emergi-Lite Type IL: IL-18-2 (6V., 9W Lamps)
- E. Or approved equal.

2.03 EXIT SIGNS



- A. General: Comply with UL 924; for sign colors and lettering size, comply with NYC Electrical Code.
- B. Internally Lighted Signs:
 - A. Lamps for AC Operation: Fluorescent, 2 for each fixture, 20,000 hours of rated lamp life.
 - B. Lamps for AC Operation: Light-emitting diodes, 70,000 hours minimum of rated lamp life.
 - C. Additional Lamps for DC Operation: Two minimum, bayonet-base type, for connection to external dc source.
- C. Self-Powered Exit Signs (Battery Type): Integral automatic charger in a self-contained power pack.
 - A. Battery: Sealed, maintenance-free, nickel-cadmium or lead-calcium type with special warranty.
 - B. Charger: Fully automatic, solid-state type with sealed transfer relay.
 - C. Operation: Relay automatically energizes lamp from battery when circuit voltage drops to 80 percent of nominal voltage or below. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
- D. Lithonia, type LENY; Exit Light Co., Emergi-Light Co., or approved to use in NYC equal.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Install the Work of this Section in accordance with the manufacturer's printed instructions.
- B. Insert a copy of the battery warranty in each unit and mark on batteries the date placed in service.

END OF SECTION 262500



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 283101
FIRE DETECTION AND ALARM SYSTEM

PART 1 - GENERAL

Related Documents:

The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract [City of New York Standard Construction Contract].

1.1 DESCRIPTION

- A. The requirements of the Contract Documents, including the DDC General Conditions shall apply to the work of this section.
- B. All exceptions taken to these Specifications, all variances from these Specification and all substitutions of operating capabilities or equipment called for in these Specification shall be listed in writing and forwarded to the Commissioner. Any such exception, variances or substitutions that were not listed and are identified in the submittal, shall be grounds for immediate disapproval without comment.
- C. The entire system shall be installed with aesthetics in mind. All control panels and remote annunciators installed in public spaces shall be semi-flush mounted with no exposed conduit or cable trays.

1.2 WORK INCLUDED

- A. The work covered by this Section of the Specification shall include all labor, equipment, materials and services to furnish and install a complete fire alarm system of the addressable, non-coded type. It shall be complete with all necessary hardware, software and memory specifically tailored for this installation. It shall be possible to permanently modify the software on site by using a plug-in programmer. The system shall consist of, where applicable, but not be limited to, the following:
 - 1. Fire Alarm Control Panel and related remote data gathering panels.
 - 2. Remote Annunciators with semi flush backbox.
 - 3. Addressable manual fire alarm stations.
 - 4. Addressable analog area smoke detectors.
 - 5. Addressable analog duct smoke detectors.
 - 6. Addressable analog heat detectors.
 - 7. CO detectors.
 - 8. Audible notification appliances - speakers.



9. Visual notification appliances - strobes.
10. Central station alarm connection control.
11. Air handling systems shutdown control.
12. Sprinkler supervisory switches and tamper switch supervision.
13. Battery standby.
14. ALL NYC Fire Alarm peripherals, such as code cards, placards, riser diagram, necessary switches, LED's, clock, fire sign, manual central office trip, Fuse Cutout, Fusible disconnect switch, FDNY approved locks, etc. shall be included in the system price.

1.3 APPLICABLE CODES AND STANDARDS

- A. All equipment shall be UL listed for its intended use and conform to the latest UL Standards.
- B. Underwriters Laboratories Inc.: The system and all components shall be listed by Underwriters Laboratories Inc. for use in fire protective signaling system under the following standards as applicable:

UL 864/UOJZ,	APOU Control Units for Fire Protective Signaling Systems.
UL 268	Smoke Detectors for Fire Protective Signaling Systems.
UL 268A	Smoke Detectors for Duct Applications.
UL 217	Smoke Detectors Single Station.
UL 521	Heat Detectors for Fire Protective Signaling Systems.
UL 228	Door Holders for Fire Protective Signaling Systems.
UL 464	Audible Signaling Appliances.
UL 1638	Visual Signaling Appliances.
UL 38	Manually Activated Signaling Boxes.
UL 346	Waterflow Indicators for Fire Protective Signaling Systems.
UL 1971	Standard for Signaling Devices for the Hearing Impaired
UL 1481	Power Supplies for Fire Protective Signaling Systems.
UL 1711	Amplifiers for Fire Protective Signaling Systems.
UUKL	The Fire Alarm system shall be UUKL for Smoke Control.

- C. This installation shall comply with:
 1. Americans with Disabilities Act (ADA)
 2. National Electric Code, Article 760 with NYC Amendments.
 3. National Fire Protection Association Standards: NFPA72
 4. Local and State Building Codes, NYC Fire Code.
 5. International Standards Organization (ISO): ISO-9001



6. The latest provisions of and amendments to Local Law No. 5, Local Law No. 16 and Local Law No. 58 of the City of New York.
7. Utilize OTCR / MEA / BSA Approved Fire Alarm Equipment
8. The requirements of the City of New York Building Department and the City of New York Fire Department.

1.4 RELATED DOCUMENTS

- A. Secure permits and approvals prior to installation.
- B. Prior to commencement and after completion of work notify FDNY.
- C. Submit letter of approval for installation before requesting acceptance of system.

1.5 RELATED WORK

- A. The Contractor shall coordinate work in this Section with all related trades. Work and/or equipment provided in other Sections and related to the fire alarm system shall include, but not be limited to:
 1. Sprinkler waterflow and supervisory switches shall be furnished and installed by the fire protection contractor, but wired and connected by the electrical contractor. Modification of existing sprinkler devices to accommodate monitoring by the new fire alarm system shall be the responsibility of the fire alarm system installing contractor.
 2. Duct smoke detectors shall be furnished, wired and connected by the electrical contractor. The HVAC contractor shall furnish necessary duct opening to install the duct smoke detectors.
 3. New air handling control circuits and status contacts to be furnished by the HVAC control equipment.
 4. Elevator recall control circuits to be provided by the elevator control equipment. The operation of the elevators shall be in accordance with applicable codes.
 5. Conduit: Section 260533.
 6. Wire and Cables: Section 260522.
 7. Installing dedicated outgoing RJ-31X telephone lines (2) shall be the responsibility of the Installing Contractor. Establishment of central station monitoring account shall be the responsibility of the fire alarm equipment vendor.



1.6 SUBMITTALS

- A. Provide list of all types of equipment and components provided. This shall be incorporated as part of a Table of Contents, which will also indicate the manufacturer's part number, the description of the part, and the part number of the manufacturer's product datasheet on which the information can be found.
- B. Provide description of operation of the system (Sequence of Operation), similar to that provided in Part 2 of this Section of the Specifications, to include any and all exceptions, variances or substitutions listed. Any such exceptions, variances or substitutions that were not listed and are identified in the submittal, shall be grounds for immediate disapproval without comment. The sequence of operation shall be project specific, and shall provide individual sequences for every type of alarm, supervisory, or trouble condition that may occur as part of normal or off-normal system use.
- C. Provide manufacturer's ORIGINAL printed product data, catalog cuts and description of any special installation procedures. Photocopied and/or illegible product data sheets shall not be acceptable. All product datasheets shall be highlighted or stamped with arrows to indicate the specific components being submitted for approval.
- D. Provide manufacturer's installation instruction manual for specified system.
- E. Provide samples of various items when requested.
- F. Provide copy of NYS License to perform such work.
- G. Provide copies of NICET Level II Fire Alarm certifications for the two (2) technicians assigned to this project.
- H. Provide shop drawings as follows:
 1. Coversheet with project name, address and drawing index.
 2. General notes drawing with peripheral device backbox size information, part numbers, device mounting height information, and the names, addresses, point of contact, and telephone numbers of all contract project team members.
 3. Device riser diagram that individually depicts all control panels, annunciators, addressable devices, and notification appliances. Shall include a specific, proposed point descriptor above each addressable device. Shall include a specific, discrete point address that shall correspond to addresses depicted on the device layout floor plans. Drawing shall provide wire specifications, and wire tags shown on all conductors depicted on the riser diagram. All circuits shall have designations that shall correspond with those



- require on the control panel and floor plan drawings. End-of-line resistors (and values) shall be depicted.
4. Control panel termination drawing(s). Shall depict internal component placement and all internal and field termination points. Drawing shall provide a detail indicating where conduit penetrations shall be made, so as to avoid conflicts with internally mounted batteries. For each additional data gathering panel, a separate control panel drawing shall be provided, which clearly indicated the designation, service and location of the control enclosure. End-of-line resistors (and values) shall be depicted.
 5. See section 3.4 DOCUMENTATION AND INSTRUCTION for other documents relating to this section.
 6. Device typical wiring diagram drawing(s) shall be provided which depict all system components, and their respective field wiring termination points. Wire type, gauge, and jacket shall also be indicated. When an addressable module is used in multiple configurations for monitoring or controlling various types of equipment, different device typical diagrams shall be provided. End-of-line resistors (and values) shall be depicted.
 7. Device layout floor plans shall be created for every area served by the fire alarm system. CAD Files (AutoCAD - latest edition) shall be provided by the Commissioner for the use of the fire alarm system equipment vendor in the preparation of the floor plans. Floor plans shall indicate accurate locations for all control and peripheral devices. Drawings shall be NO LESS THAN 1/8 INCH SCALE. All addressable devices shall be depicted with a discrete address which corresponds with that indicated on the Riser Diagram. All notification appliances shall also be provided with a circuit address which corresponds to that depicted on the Riser Diagram. If individual floors need to be segmented to accommodate the 1/8" scale requirements, KEY PLANS and BREAK-LINES shall be provided on the plans in an orderly and professional manner. End-of-line resistors (and values) shall be depicted.
 8. Contained in the title block of each drawing shall be symbol legends with device counts, wire tag legends, circuit schedules for all addressable and notification appliance circuits, the project name/address, and a drawing description which corresponds to that indicated in the drawing index on the coversheet drawing. A section of each drawing title block shall be reserved for revision numbers and notes. The initial submission shall be Revision 0, with Revision A, B, or C as project modifications require.



- I. Battery calculations shall be provided on a per power supply/charger basis based on applicable code requirements. These calculations shall clearly indicate the quantity of devices, the device part numbers, the supervisory current draw, the alarm current draw, totals for all categories, and the calculated battery requirements. Battery calculations shall also reflect all control panel component, remote annunciator, and auxiliary relay current draws. Failure to provide these calculations shall be grounds for the complete rejection of the submittal package.
- J. Table of contents, product data sheets, sequences of operation, battery calculations, installation instructions, licenses, NICET certifications and B-Size (blackline) reduced shop drawings shall be provided by the fire alarm vendor as part of a single, spiral bound submittal book. The submittal book shall have laminated covers indicating the project address, SED number, system type, and contractor. The book shall consist of labeled dividers, and shall not exceed 9 ½" in width, and 11 ½" in height. No less than three (3) sets of submittal booklets shall be provided to the Commissioner for review and comment. Additional copies may be required at no additional cost to the project.
- K. Scale drawing sets shall be submitted along with the submittal booklets. These drawings may be either D-Size or E-Size Blue-line drawings and of a sufficient resolution to be completely read. Sets shall be bound and folded so as to not take up more than 100 square inches of space. No less than three (3) sets of scale drawing sets shall be provided to the Commissioner for review and comment. Additional copies may be required at no additional cost to the City of New York.

1.7 WARRANTY

- A. All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of at least one (1) year from the date of acceptance or approval by Commissioner. The full cost of service, labor and materials required to correct any defect during this one year period shall be included in the submittal bid.

PART II - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. The Fire Alarm Control Panel shall be "Edwards III" manufacturer by USC Fire & Security.



- B. All products used shall be of a single manufacturer. Submission of notification appliances, auxiliary relays, or documentation from other than a single manufacturer shall not be acceptable and will be grounds for immediate disapproval without comment.
- C. The Fire Alarm / Life Safety System supplied under this specification shall be a microprocessor-based. All Control Panel Assemblies and connected Field Appliances shall be both designed and manufactured by the same company, and shall be tested and cross-listed as compatible to ensure that a fully functioning Life Safety System is designed and installed.

2.2 CIRCUITING GUIDELINES

- A. Each addressable analog loop shall be circuited so device loading is not to exceed 80% of loop capacity in order to leave for space for future devices. The loop shall have Class B operation.
- B. Where it is necessary to interface conventional initiating devices provide intelligent input modules to supervise Class B zone wiring.
- C. Each of the following types of devices or equipment shall be provided with supervised circuits as shown on the drawings but shall be typically as follows:
 - 1. Sprinkler Valve Supervisory Switches: Provide one (1) supervisory module circuit for each sprinkler valve supervisory switch.
 - 2. When waterflow and tamper switches exist at the same location, provide one (1) dual input addressable module. When odd numbers of devices exist at a single location, provide additional single input addressable modules.
- D. Alarm: The FACP central processing unit (CPU) shall provide a general alarm Temporal 3-code operation.
- E. Each of the following types of alarm notification appliances shall be circuited as shown on the drawings but shall be typically as follows:
 - 1. Audible Signals: Provide sufficient spare capacity to assure that the addition of five (5) audible devices can be supported without the need for addition control components (power supplies, signal circuit modules, amplifiers, batteries, etc.)
 - 2. Visual Signals. Provide sufficient spare capacity to assure that the addition of three (3) visual devices can be supported without the need for addition control components (power supplies, signal circuit modules, batteries, etc.)



- F. Each of the following types of remote equipment associated with the fire alarm system shall be provided with a form 'C' control relay contact as shown on the drawings, but shall be typically as follows:
1. HVAC Fan Systems: Provide one (1) shutdown control relay contact for each HVAC fan system.
 2. HVAC Supply Fans: Provide one (1) shutdown control relay contact for each HVAC supply fan.
 3. HVAC Return Fans: Provide one (1) shutdown control relay contact for each HVAC return fan.
- G. Provide a dedicated 24VDC circuit to feed all auxiliary relays required for inductive loads. Circuits shall be supervised via an end-of-line relay and addressable input module. Auxiliary relays shall not derive their power from the starter or load being controlled.

2.3 FIRE ALARM SYSTEM SEQUENCE OF OPERATION

- A. The system shall identify any off normal condition and log each condition into the system database as an event.
1. The system shall automatically display on the control panel Liquid Crystal Display the first event of the highest priority by type. The priorities and types shall be alarm, supervisory, trouble, and monitor.
 2. The system shall have a Queue operation, and shall not require event acknowledgment by the system operator. The system shall have a labeled color coded indicator for each type of event; alarm - red, supervisory - yellow, trouble - yellow, monitor - yellow. When an unseen event exists for a given type, the indicator shall be lit.
 3. For each event, the display shall include the current time, the total number of events, the type of event, the time the event occurred and up to a 42 character custom user description.
 4. The user shall be able to review each event by simply selecting scrolling keys (up-down) for each event type.
 5. New alarm, supervisory, or trouble events shall sound a silencing audible signal at the control panel.
- B. Operation of any manual fire alarm station or alarm activation of any area smoke detect/sensor, duct smoke detect/sensor, shall automatically



1. Update the control/display as described above (A.1.)
2. Sound a pulsing audible signal and flash the general alarm LED indicator at the FACP. Pressing the alarm acknowledge key on the FACP shall silence the audible signal and continuously light the LED, during the alarm condition. Subsequent alarm conditions shall resound the audible signal and again flash the LED. Each alarm condition must be individually acknowledged.
3. Display a general alarm indication and system status summary (numbers of alarm, supervisory and/or trouble conditions) on the FACP alphanumeric, liquid crystal display (LCD). The LCD Display shall automatically display the device/circuit type and the custom 42-character message without any operator intervention.
4. Enter the custom label for the device or circuit reporting the alarm condition with the time and date of alarm activation into the FACP historical alarm log for future recall/review.
5. Sound an audible signal at the remote annunciator panel. The audible signal may be silenced during the alarm condition. Subsequent alarm conditions shall resound the audible signal.
6. Visually annunciate the alarm-initiating device via an individual or "group" alarm indicator.
7. Display a general alarm indication and system status summary (numbers of alarm, supervisory and /or trouble conditions) on the remote annunciator panels(s) alphanumeric, liquid crystal display (LED). The LCD shall automatically display the device type and custom 42-character display without operator intervention.
8. Sound the appropriate Temporal 3 alarm code on all horns throughout the building. Activation of a smoke or heat detector shall also continuously sound the smoke/heat alarm bell at the FACP. The smoke/heat alarm bells may be silenced by operation of the FACP signal silence switch.
9. Flash all alarm strobe lights throughout the building. The alarm strobe lights may be turned off during the alarm condition by operation of the FACP alarm silence switch. Subsequent alarm conditions shall again turn on the alarm strobe lights. The alarm strobe lights shall be inhibited from being turned off for a period of one/three/five (1/3/5) minutes after commencing operation.



10. Each alarm strobe light circuit shall be provided with a synchronized flash module, at the FACP, so that all alarm strobe lights connected to any single alarm strobe light circuit shall flash at the same time at a rate of one (1) flash per second.
 11. Flash all alarm strobe lights. Subsequent alarm condition shall again turn on the alarm strobe lights. The alarm strobe lights shall be inhibited from being turned off for a period of five (5) minutes after commencing operation.
 12. Operate control relay contacts to shutdown all air handling systems that serve the building and close any smoke dampers related to those systems. Air handling systems shall not be permitted to restart to normal operation from the simple operation of the system reset switch. A separate air handling systems restart switch shall be provided on the FACP to permit air handling systems to be restarted after the fire alarm system has been reset to normal.
 13. Operate control relay contact to initiate the transmission of an alarm indication by type of alarm condition (manual alarm, or smoke/heat alarm) to a central station agency via telephone lines. Selection of a central station agency, its equipment, its fees and fees for telephone line usage are the responsibility of the City of New York or Commissioner.
- C. Elevator smoke and heat detector sequences shall comply with the applicable code requirements for floor recalls and shunt trip (if allowed).
- D. Activation of a sprinkler supervisory initiating device shall:
1. Update the control/display as described above (A.1.)
 2. Transmit a supervisory condition, via the integral central station communicator, to central station/Local Fire.
 3. Visually annunciate the individual point of alarm on all remote annunciator panels. The visual indication shall remain on until the alarm condition is reset to normal.
- E. The entire fire alarm system wiring shall be electrically supervised to automatically detect and report trouble conditions to the fire alarm control panel. Any opens, grounds or disarrangement of system wiring and shorts across alarm signaling wiring shall automatically:
1. Update the control/display as described above (A.1.)
 2. Transmit a trouble condition, via the integral central station communicator, to central station/Local Fire Department.
 3. Visually and audibly annunciate a general trouble condition, on the remote annunciator panels. The visual



indication shall remain on until the trouble condition is repaired.

2.4 SUPPORT FOR INSTALLER AND SERVICE

- A. Provide a coded one-man walk test feature. Allow audible or silent testing. Signal alarms and troubles during test. Allow receipt of alarms and programmed operations for alarms from areas not under test.
- B. Provide internal system diagnostics and maintenance user interface controls to display/report the power, communication, and general status of specific panel components, detectors, and modules.
- C. Provide loop controller diagnostics to identify common alarm, trouble, ground fault, Class A fault, and map faults. Map faults include wire changes, device type changes by location, device additions/deletions and conventional open, short, and ground conditions. Ground faults on the circuit wiring of remote module shall be identified by device address.
- D. Allow the user to display/report the condition of addressable analog detectors. Include device address, device type, percent obscuration, and maintenance indicator. The maintenance indicator shall provide the user with a measure of contamination of a device upon which cleaning decisions can confidently be made.
- E. Allow the user to report history for alarm, supervisory, monitor, trouble, smoke verification, watchdog, and restore activity. Include Facility Name, Licensee, Project Program Compilation date, Compiler Version, Project Revision Number, and the time and date of the History Report.
- F. Allow the user to disable/enable devices, zones, actions, timers and sequences. Protect the disable function with a password.
- G. Allow the user to activate/restore outputs, actions, sequences, and simulate detector smoke levels.
- H. Allow the service user to enter time and date, reconfigure an external port for download programming, initiate auto programming and change passwords. Protect these functions with a password.
- I. The City Of New York shall retain complete rights and ownership to all software running in the system. The fire alarm equipment vendor shall provide useable hard and soft copies of the software database to the City of New York at the end of the warranty period. The database provided shall be useable by any authorized and certified distributor of the product line, and shall include all applicable passwords necessary for total and unrestricted use and modification of the database. The



Commissioner shall define the extent of hardcopy database documentation to be provided.

2.5 UL LISTED AND APPROVED EQUIPMENT

A. Fire Alarm Control Panel Requirements:

The fire alarm control panel or panels and all system devices (horn-strobes, strobes, pull stations, smoke and heat detectors, etc. shall be Edwards Systems Technology (EST) by UTC Fire & Security, type EST3 series. All under one label "UL listed and approved" for the use of fire alarm systems in this area of the United States of America.

The operating controls shall be located behind locked door with viewing window. All control modules shall be labeled, and all zone locations shall be identified.

B. System Controllers

The main controller CPU shall be supervised, site programmable, and of modular design supporting up to 125 detectors and 125 remote modules per addressable Signaling line Circuit (SLC). The CPU shall support up to 10 SLC's per panel for a total system capacity of 2500 Intelligent Addressable points. The system shall be designed with peer-to-peer networking capability for enhanced survivability, with support for up to 64 modes, each with up to 2500 points and an overall capacity of 160,000 points. The cabinets shall be steel, with a red finish.

C. The system shall store all basic system functionality and job specific data in non-volatile memory. All site specific and operating data shall survive a complete power failure intact. Passwords shall protect any changes to system operations.

D. The Main Controller Module shall control and monitor all local or remote peripherals. It shall support a large 960 character LCD, power supply, remote LCD and zone display annunciators, printers, and support communication interface standard protocol (CSI) devices such as color computer annunciators and color graphic displays. Remote LCD annunciators shall also display each and every point in the system and be sized with the same number of characters as in the main FACP display.

E. The panel shall have an interface module for remote site monitoring. The module shall have a dialer (alarm communicator transmitter (DACT)) module to transmit alarm, supervisory and trouble signals to a Central Monitoring Station (CMS). The DACT shall support dual telephone lines, Contact I.D. communications, and configured for dual tone multi-frequency (DTMF) or pulse modes. It shall be possible to delay AC power failure reports, auto test call, and be site programmable. The dialer shall be capable of transmitting every individual alarm condition to the central station.



- F. The system shall have built-in automatic system programming to automatically address and map all system devices attached to the main controller. A minimum default single stage alarm system operation shall be supported with alarm silence, event silence, drill, lamp test, and reset common controls.
- G. Advanced Windows-based System Definition Utility with Program Version Reporting to document any and all changes made during system start-up or system commissioning shall be used to maintain site specific programming. Time and Date Stamps of all modifications made to the program must be included to allow full retention of all previous program version data. It shall support programming of any input point to any output point. The system shall support the use of Bar Code readers to assist custom programming functions. It shall allow authorized customization of fundamental system operations using initiating events to start actions, timers, sequences and logical algorithms. The system program shall meet the requirements of this project, current codes and standards, and satisfy the local City of New York.
- H. The system shall support distributed processor intelligent detectors with the following operational attributes; integral multiple differential sensors, automatic device mapping, electronic addressing, environmental compensation, pre-alarm, dirty detector identification, automatic day/night sensitivity adjustment, normal/alarm LEDs, relay bases, sounder bases and isolator bases.
- I. The system shall use full digital communications to supervise all addressable loop devices for placement, *correct location*, and operation. It shall allow swapping of "same type" devices without the need of addressing and impose the "location" parameters on replacement device. It shall initiate and maintain a trouble if a device is added to a loop and clear the trouble when the new device is mapped and defined into the system.
- J. Each controller shall contain a RS232 printer/programming port for programming locally via a PC. When operational, each controller shall support a printer through the RS232 port and be capable of message routing.
- K. System circuits shall be configured as follows: Addressable analog SLC loops Class B (Style 4); Initiating Device Circuits Class B; Notification Appliance Circuits "split" Class B; Network Communications Class B; Annunciator Communications Class B.
- L. Single stage operation shall be provided.
- M. The system shall have a UL Listed Detector Sensitivity test feature, which will be a function of the smoke detectors and performed automatically every 4 hours.



- N. The system shall support 100% of all remote devices in alarm and provide support for a 100% compliment of detector isolator bases.
- O. All panel modules shall be supervised for placement and return trouble if damaged or removed.
- P. The system shall have a CPU watchdog circuit to initiate trouble should the CPU fail.
- Q. The Fire Alarm / Life Safety System shall code the Notification Appliance Circuits with the industry standard Temporal 3 pattern.
- R. Audible notification appliances shall be affected by signal silence features. Visual signal appliance shall not be affected by signal silence features.
- S. User Interface
 - 1. The 3-LCDXL Display Module shall be of membrane style construction with a 24 line by 40-character (960 total characters) Liquid Crystal Display (LCD). The LCD shall use super-twist technology and backlighting for high contrast visual clarity and a colored gray/black and white display. In the normal mode the LCD shall display the time, a customer facility name, and the number of history events. In the alarm mode the LCD display the total number of events and the type of event on display. The LCD shall reserve 42 characters of display space for each user custom message by addressable device. The module shall have visual indicators for the following common control functions; Power, Alarm, Supervisory, Monitor, Trouble, Disable, Ground Fault, CPU fail, and Test. There shall be common control keys and visual indicators for reset, alarm silence, panel silence, and drill. Provide four pairs of display control keys for selection of event display by type (alarm, supervisory, monitor and trouble) and forward / backward scrolling through event listings. The operation of these keys shall be integrated with the related common control indicators to flash the indicators when un-displayed events are available for display and turn on steady when all events have been displayed. The LCD shall display the first event of the highest priority as well as the previous seven (7) alarm events "hands free" in chronological order so that the arriving firefighter may track the fires progression. Provide system function keys; status, reports, enable, disable, activate, restore, program, and test. The module shall have a numeric keypad, zero through nine with delete and enter keys.
 - 2. As an alternate if the above cannot be provided, provide UL-Listed 864 PC graphics display.



T. Power Supplies

The power supply shall be a high efficiency switch mode type with line monitoring to automatically switch to batteries for power failure or brown out conditions. The automatic battery charger shall have low battery discharge protection. The power supply shall provide internal power and 24 Vdc at 7.0A continuous for notification appliance circuits. The power supply shall be capable of providing 7A to output circuits for a maximum period of 100 ms. All outputs shall be power limited. The battery shall be sized to support the system for 24 hours of supervisory and trouble signal current plus general alarm for 15 minutes.

U. Auxiliary power supplies shall be a high efficiency switch mode type with line monitoring to automatically switch to batteries for power failure or brown out conditions. The automatic battery charger shall have low battery discharge protection. The power supply shall provide internal power and 24 Vdc at 7.0A continuous for notification appliance circuits. The power supply shall be capable of providing 7A to output circuits for a maximum period of 100 ms. All outputs shall be power limited. The battery shall be sized to support the system for 24 hours of supervisory and trouble signal current plus general alarm for 15 minutes.

V. Network alpha-numeric annunciators shall be located throughout the facility as indicated on the plans. The system shall have the capacity to support 64 network annunciators or EST3 network panel nodes. Each annunciator shall contain a supervised, back lit, liquid crystal with a minimum of 8 line with 21 characters per line. Where required, the annunciator shall include additional zonal annunciation and manual control without additional enclosures. The annunciator shall support full ability to serve as the operating interface to the system and shall include the following features;

1. Matched appearance with other system displays Each LCD Display on each node (cabinet) in the system shall be configurable to show the status of any or all of the following functions anywhere in the system:

- a. Alarm
- b. Supervisory
- c. Trouble
- d. Monitor

W. Each annunciator must be capable of supporting custom messages as well as system event annunciation. It must be possible to filter unwanted annunciation of trouble, alarm or supervisory functions on a by point or by geographic area. The annunciators shall be mounted in stand-alone enclosures or integrated into the network panels as indicated on the plans.



2.6 COMPONENTS

A. Intelligent Devices-General

1. Each remote device shall have a microprocessor with non-volatile memory to support its functionality and serviceability. Each device shall store as required for its functionality the following data: device serial number, device address, device type, personality code, date of manufacture, hours in use, time and date of last alarm, amount of environmental compensation left/used, last maintenance date, job/project number, current detector sensitivity values, diagnostic information (trouble codes) and algorithms required to process sensor data and perform communications with the loop controller.
2. Each device shall be capable of electronic addressing, either automatically or application programmed assigned, to support physical/electrical mapping and supervision by location. Setting a device's address by physical means shall not be necessary.

B. Intelligent Detectors - General

1. The System Intelligent Detectors shall be capable of full digital communications using both broadcast and polling protocol. Each detector shall be capable of performing independent fire detection algorithms. The fire detection algorithm shall measure sensor signal dimensions, time patterns and combine different fire parameters to increase reliability and distinguish real fire conditions from unwanted deceptive nuisance alarms. Signal patterns that are not typical of fires shall be eliminated by digital filters. Devices not capable of combining different fire parameters or employing digital filters shall not be acceptable.
2. Each detector shall have an integral microprocessor capable of making alarm decisions based on fire parameter information stored in the detector head. Distributed intelligence shall improve response time by decreasing the data flow between detector and analog loop controller. Detectors not capable of making independent alarm decisions shall not be acceptable. Maximum total analog loop response time for detectors changing state shall be 0.5 seconds.
3. Each detector shall have a separate means of displaying communication and alarm status. A green LED shall flash to confirm communication with the analog loop controller. A red LED shall flash to display alarm status.
4. The detector shall be capable of identifying up to 32 diagnostic codes. This information shall be available for



- system maintenance. The diagnostic code shall be stored at the detector.
5. Each smoke detector shall be capable of transmitting pre-alarm and alarm signals in addition to the normal, trouble and need cleaning information. It shall be possible to program control panel activity to each level. Each smoke detector may be individually programmed to operate at any one of five (5) sensitivity settings.
 6. Each detector microprocessor shall contain an environmental compensation algorithm which identifies and sets ambient "Environmental Thresholds" approximately six times an hour. The microprocessor shall continually monitor the environmental impact of temperature, humidity, other contaminants as well as detector aging. The process shall employ digital compensation to adapt the detector to both 24 hour long term and 4 hour short term environmental changes. The microprocessor shall monitor the environmental compensation value and alert the system operator when the detector approaches 80% and 100% of the allowable environmental compensation value. Differential sensing algorithms shall maintain a constant differential between selected detector sensitivity and the "learned" base line sensitivity. The base line sensitivity information shall be updated and permanently stored at the detector approximately once every hour.
 7. The intelligent analog detectors shall be suitable for mounting on any Signature Series detector mounting base.
 8. The Fire alarm system shall have the ability to set elevator lobby Ionization or Multi Sensing smoke detectors for alarm verification. Detector in the alarm verification mode shall indicate, by point in a text format at the main control and at the remote LCD annunciators.
- C. Fixed Temperature/Rate of Rise Heat Detector, SIGA-HRS
- Provide intelligent combination fixed temperature/rate-of-rise heat detectors SIGA-HRS. The heat detector shall have a low mass thermistor heat sensor and operate at a fixed temperature and at a temperature rate-of-rise. It shall continually monitor the temperature of the air in its surroundings to minimize thermal lag to the time required to process an alarm. The integral microprocessor shall determine if an alarm condition exists and initiate an alarm based on the analysis of the data. Systems using central intelligence for alarm decisions shall not be acceptable. The intelligent heat detector shall have a nominal fixed temperature alarm point rating of 135°F (57°C) and a rate-of-rise alarm point of 15°F (9°C) per minute. The heat detector shall be rated for ceiling



installation at a minimum of 70 ft (21.3m) centers and be suitable for wall mount applications.

D. Ionization Smoke Detector, SIGA-IS

1. Provide intelligent ionization smoke detectors SIGA-IS. The analog ionization detector shall utilize a unipolar ionization smoke sensor to sense changes in air samples from its surroundings. The integral microprocessor shall dynamically examine values from the sensor and initiate an alarm based on the analysis of data. Systems using central intelligence for alarm decisions shall not be acceptable. The detector shall continually monitor any changes in sensitivity due to the environmental affects of dirt, smoke, temperature, aging and humidity. The information shall be stored in the integral processor and transferred to the analog loop controller for retrieval using a laptop PC or the SIGA-PRO Signature Program/Service Tool. The ion detector shall be rated for ceiling installation at a minimum of 30 ft (9.1m) centers and be suitable for wall mount applications. The ion smoke detector shall be rated for operation in constant air velocities from 0 to 75 ft/min. (0-0.38 m/sec) and with intermittent air gusts up to 300 ft/min. (1.52m/sec) for up to 1 hour. The percent smoke obscuration per foot alarm set point shall be field selectable to any of five sensitivity settings ranging from 0.7% to 1.6%. The ion detector shall be suitable for operation in the following environment:
 - a) Temperature: 32°F to 120°F (0°C to 49°C),
 - b) Humidity: 0-93% RH, non-condensing,
 - c) Elevation: Up to 6,000 ft.(1828 m).

E. Photoelectric Smoke Detector, SIGA-PS

1. Provide intelligent photoelectric smoke detectors SIGA-PS. The analog photoelectric detector shall utilize a light scattering type photoelectric smoke sensor to sense changes in air samples from its surroundings. The integral microprocessor shall dynamically examine values from the sensor and initiate an alarm based on the analysis of data. Systems using central intelligence for alarm decisions shall not be acceptable. The detector shall continually monitor any changes in sensitivity due to the environmental affects of dirt, smoke, temperature, aging and humidity. The information shall be stored in the integral processor and transferred to the analog loop controller for retrieval using a laptop PC or the SIGA-PRO Signature Program/Service Tool. The photo detector shall be rated for ceiling installation at a minimum of 30 ft (9.1m) centers and be suitable for wall mount applications. The photoelectric smoke detector shall be suitable for direct insertion into air ducts up to 3 ft (0.91m) high and 3 ft (0.91m) wide with



air velocities up to 5,000 ft/min. (0-25.39 m/sec) without requiring specific duct detector housings or supply tubes.

2. The percent smoke obscuration per foot alarm set point shall be field selectable to any of five sensitivity settings ranging from 1.0% to 3.5%. The photo detector shall be suitable for operation in the following environment:
 - a) Temperature: 32^oF to 120^oF (0^oC to 49^oC)
 - b) Humidity: 0-93% RH, non-condensing
 - c) Elevation: no limit

F. 4D Multisensor Detector, SIGA-IPHS

1. Provide intelligent 4D multisensor smoke detectors SIGA-IPHS. The multisensor analog detector shall use a light scattering type photoelectric smoke sensor, a unipolar ionization smoke sensor and an ambient temperature sensor to sense changes in air samples from its surroundings. The integral microprocessor shall employ time based algorithms to dynamically examine values from the three sensors simultaneously and initiate an alarm based on that data. The 4D Multisensor shall be capable of adapting to ambient environmental conditions. The temperature sensor shall self-adjust to the ambient temperature of the surrounding air and input an alarm when there is a change of 65^oF (35^oC) in ambient temperature. Systems using central intelligence for alarm decisions shall not be acceptable. The detector shall continually monitor any changes in sensitivity due to the environmental affects of dirt, smoke, temperature, age and humidity. The information shall be stored in the integral processor and transferred to the analog loop controller for retrieval using a laptop PC or the SIGA-PRO Signature Program/Service Tool. Separately mounted photoelectric detectors, ionization detectors and heat detectors in the same location are not acceptable alternatives. The 4D Multisensor smoke detector shall be rated for ceiling installation at a minimum of 30 ft (9.1m) centers and suitable for wall mount applications. The 4D Multisensor shall be suitable for direct insertion into air ducts up to 3 ft (0.91m) high and 3 ft (0.91m) wide and air velocities up to 500 ft/min. (0-2.54 m/sec) without requiring specific duct detector housings or supply tubes.
2. The percent smoke obscuration per foot alarm set point shall be field selectable to any of five sensitivity settings ranging from 1.0% to 3.5%. The integral heat sensor shall cause an alarm when it senses a change in ambient temperature of 65^oF (35^oC) or reaches it fixed temperature alarm set point of 135^oF (57^oC) nominal. The



4D Multisensor detector shall be suitable for operation in the following environment:

- a) Temperature: 32°F to 100°F (0°C to 38°C)
- b) Humidity: 0-93% RH, non condensing
- c) Elevation : Up to 6,000 ft (1828 m)

G. Standard Detector Mounting Bases, SIGA-SB / SIGA-SB4

1. Provide standard detector mounting bases SIGA-SB suitable for mounting on North American 1-gang, 3½" or 4" octagon box and 4" square box. The base shall, contain no electronics, support all Signature Series detector types and have the following minimum requirements:
 - a) Removal of the respective detector shall not affect communications with other detectors.
 - b) Terminal connections shall be made on the room side of the base. Bases which must be removed to gain access to the terminals shall not be acceptable.
 - c) The base shall be capable of supporting one (1) Signature Series SIGA-LED Remote Alarm LED Indicator. Provide remote LED alarm indicators where shown on the plans.

H. Duct Detector, Model SIGA-SD

1. Provide model SIGA-SD Low profile intelligent addressable DUCT smoke detector as indicated on the project plans. Provide for variations in duct air velocity between 100 and 4,000 feet per minute and include a wide sensitivity range of .79 to 2.46%/ft. Obscuration. Include one Form-C shut down relay rated 2.0 amps @ 30 Vdc and also include slave high contact relays if required. Provide an air exhaust tube and an air sampling inlet tube that extends into the duct air stream up to ten feet. The addressable DUCT housing shall be suitable for extreme environments, including a temperature range of -20 to 158 degrees F (-29 to 70 degrees Celsius) and offer a harsh environment gasket option. Provide Remote Alarm LED Indicators SIGA-LED and/or remote test station model SD-TRK as indicated on the project plans.

I. Carbon Monoxide Monitor.

1. Provide EST carbon monoxide monitor SIGA2-COS. The detector shall be of the intelligent type, self monitoring and compatible with the EST fire alarm system.
 - a. Capable of detecting the presence of carbon monoxide and transmitting a trouble alarm to the fire alarm control panel.
 - b. Equipped with on-board microprocessor to measure and analyze sensor readings to make alarm decisions thereby eliminating false alarms.



- c. Contain a daughter board to signal the FACP when the electrochemical cell requires replacement.
- d. Easily field replacement of the sensor and daughterboard.
- e. Features a selection of sub-bases for various field
- f. conditions EG, relay, audible, isolation, remote LED, etc.

2. Standard features

- a. Advance electrochemical carbon monoxide sensing technology.
- b. Field replaceable carbon monoxide sensing and daughterboard.
- c. Use existing wiring
- d. Automatic device mapping
- e. Ground fault detection by module.
- f. Electronic addressing
- g. Non-volatile memory
- h. Automatic day/night sensing adjustment
- i. Bicolor status LED.
- j. Standard base selections.

3. Installation

- a. Mounts in standard North American 1-Gang box.
- b. Can function in stand-alone or on loop configuration. Has tamper-proof construction capable of accept or disable.

4. Approved manufacturers

- a. EDWARDS (UTC) or approved equal, compatible with Edwards systems. Contractor to submit specifications and Samples.

Carbon monoxide monitor shall be equal to the following:
EDWARDS: SIGA2-COS. With standard mounting base SIGA-SB or as indicated on drawings., EST 260-CO.

J. Intelligent Modules-General

1. It shall be possible to address each Intelligent Signature Series module without the use of DIP or rotary switches. Devices using DIP switches for addressing shall not be acceptable. The personality of multifunction modules shall be programmable at site to suit conditions and may be changed at any time using a personality code downloaded from the Analog Loop Controller. Modules requiring EPROM, PROM, ROM changes or DIP switch and/or jumper changes



shall not be acceptable. The modules shall have a minimum of 2 diagnostic LEDs mounted behind a finished cover plate. A green LED shall flash to confirm communication with the loop controller. A red LED shall flash to display alarm status. The module shall be capable of storing up to 24 diagnostic codes which can be retrieved for troubleshooting assistance. Input and output circuit wiring shall be supervised for open and ground faults. The module shall be suitable for operation in the following environment:

- a) Temperature: 32°F to 120°F (0°C to 49°C)
- b) Humidity: 0-93% RH, non-condensing

K. Single Input Module, SIGA-CT1

1. Provide intelligent single input modules SIGA-CT1. The Single Input Module shall provide one (1) supervised Class B input circuit capable of a minimum of 4 personalities, each with a distinct operation. The module shall be suitable for mounting on North American 2 ½" (64mm) deep 1-gang boxes and 1 ½" (38mm) deep 4" square boxes with 1-gang covers. The single input module shall support the following circuit types:

- a) Normally-Open Alarm Latching (Manual Stations, Heat Detectors, etc.)
- b) Normally-Open Alarm Delayed Latching (Waterflow Switches)
- c) Normally-Open Active Non-Latching (Monitor, Fans, Dampers, Doors, etc.)
- d) Normally-Open Active Latching (Supervisory, Tamper Switches)

L. Dual Input Module, SIGA-CT2

1. Provide intelligent dual input modules SIGA-CT2. The Dual Input Module shall provide two (2) supervised Class B input circuits each capable of a minimum of 4 personalities, each with a distinct operation. The module shall be suitable for mounting on North American 2 ½" (64mm) deep 1-gang boxes and 1 ½" (38mm) deep 4" square boxes with 1-gang covers. The dual input module shall support the following circuit types:

- a) Normally-Open Alarm Latching (Manual Stations, Heat Detectors, etc.)
- b) Normally-Open Alarm Delayed Latching (Waterflow Switches)
- c) Normally-Open Active Non-Latching (Monitor, Fans, Dampers, Doors, etc.)
- d) Normally-Open Active Latching (Supervisory, Tamper Switches)



- M. Waterflow/Tamper Module, SIGA-WTM: Provide intelligent waterflow/tamper modules SIGA-WTM. The Waterflow/Tamper Module shall be factory set to support two (2) supervised Class B input circuits. Channel A shall support a Normally-Open Alarm Delayed Latching Waterflow Switch circuit. Channel B shall support a Normally-Open Active Latching Tamper Switch. The waterflow/tamper module shall be suitable for mounting on North American 2 ½" (64mm) deep 1-gang boxes and 1 ½" (38mm) deep 4" square boxes with 1-gang covers.
- N. Single Input Signal Module, SIGA-CC1
1. Provide intelligent single input signal modules SIGA-CC1 for activating Notification Appliance (Horn, Strobe and Horn Strobe) circuits. The Single Input (Single Riser Select) Signal Module shall provide one (1) supervised Class B output circuit. The module shall be suitable for mounting on North American 2 ½" (64mm) deep 2-gang boxes and 1 ½" (38mm) deep 4" square boxes with 2-gang covers, or European 100mm square boxes. The single input signal module shall support the following operations:
 - a) Audible/Visible Signal Power Selector (Polarized 24 Vdc @ 2A)
- O. Control Relay Module, SIGA-CR
1. Provide intelligent control relay modules SIGA-CR. The Control Relay Module shall provide one form "R" dry relay contact rated at 2 amps @ 24 Vdc to control external appliances or equipment shutdown. The control relay shall be rated for pilot duty and releasing systems. The position of the relay contact shall be confirmed by the system firmware. The control relay module shall be suitable for mounting on North American 2 ½" (64mm) deep 1-gang boxes and 1 ½" (38mm) deep 4" square boxes with 1-gang covers.
- P. Intelligent Manual Pull Stations - General
1. It shall be possible to address each Signature Series fire alarm pull station without the use of DIP or rotary switches. Devices using DIP switches for addressing shall not be acceptable. The manual stations shall have a minimum of 2 diagnostic LEDs mounted on their integral, factory assembled single or two stage input module. A green LED shall flash to confirm communication with the loop controller. A red LED shall flash to display alarm status. The station shall be capable of storing up to 24 diagnostic codes which can be retrieved for troubleshooting assistance. Input circuit wiring shall be supervised for open and ground faults. The fire alarm pull station shall be suitable for operation in the following environment:



- a) Temperature: 32°F to 120°F (0°C to 49°C)
 - b) Humidity: 0-93% RH, non-condensing
2. The manual station shall be painted with a one inch wide (1" W.) white stripe running diagonally from the upper left corner to the lower right corner.
 3. Manual Pull Station, SIGA-270
 - a) Provide intelligent single action, single stage fire alarm stations SIGA-270. The fire alarm station shall be of metal construction with an internal toggle switch. Provide a locked test feature. Finish the station in red with silver "PULL IN CASE OF FIRE" English lettering. The manual station shall be suitable for mounting on North American 2 ½" (64mm) deep 1-gang boxes and 1 ½" (38mm) deep 4" square boxes with 1-gang covers. All manual stations which, when activated dial the central station, shall be mechanically identified with a white stripe per NYC code.

Q. Notification Appliances - General

1. All appliances shall be UL Listed for Fire Protective Service.
2. All strobe appliances or combination appliances with strobes shall be capable of providing the "Equivalent Facilitation" which is allowed under the Americans with Disabilities Act accessibility guidelines (ADA(AG)), and shall be UL 1971, arranged per NYC Building Code.
3. All appliances shall be of the same manufacturer as the Fire Alarm Control Panel specified to insure absolute compatibility between the appliances and the control panels, and to insure that the application of the appliances are done in accordance with the single manufacturers' instructions.
4. Any appliances which do not meet the above requirements, and are submitted for use must show written proof of their compatibility for the purposes intended. Such proof shall be in the form of documentation from all manufacturers which clearly states that their equipment (as submitted) are 100% compatible with each other for the purposes intended.

R. Strobes, G1RF-VM Series

1. Provide EST Series G1RF-VM series low profile wall mounted strobes at the locations shown on the drawings. Strobes shall provide synchronized flash outputs. Strobe output shall be field selectable as indicated on the drawings in



one of the following intensity levels; 15/75, 15cd, 30cd, 75cd or 110cd*. Low profile strobes shall mount in a North American 1-gang box or surface mounted on a matching back box provided by the manufacturer, as directed in the field.

* The fire alarm vendor may select below 75 candela where allowed by the appropriate release of ADA. 15/75 strobes may be used in corridors and in locations where 15 candela is required per NFPA wall and ceiling tables (see NFPA 72).

S. Temporal Horn Strobes, G1RF-HDVM Series

1. Provide EST Series G1RF-HDVM low profile wall mount horn/strobes at the locations shown on the drawings. The horn/strobe shall provide an audible output of 84.4 dBA at 10 ft at the high setting and for smaller room size locations (as indicated on the plans) a low dB setting (field selectable) of 79.4 dB at 10 ft. when measured in reverberation room per UL-464. Strobes shall provide synchronized flash outputs. The strobe output shall be as indicated on the drawings in one of the following field selectable intensity levels*; 15/75, 15cd, 30cd, 75cd & 110cd devices. The horn shall have a selectable steady or synchronized temporal output. Low profile horn/strobes shall mount in a North American 1-gang box or surface mounted on a matching back box provided by the manufacturer, as directed in the field.

* The fire alarm vendor may select below 75 candela where allowed by the appropriate release of ADA. 15/75 strobes may be used in corridors and in locations where 15 candela is required per NFPA wall and ceiling tables (see NFPA 72).

T. Remote Relays

1. Multi-Voltage Control Relays, MR-100 Series
2. Provide remote control relays connected to supervised ancillary circuits for control of fans, etc. Relay contact ratings shall be SPDT and rated for 10 amperes at 115 Vac. A single relay may be energized from a voltage source of 24 Vdc, 24 Vac, 115 Vac, or 230 Vac. A red LED shall indicate the relay is energized. A metal enclosure shall be provided.

U. Multi-Voltage Control Relays, MR-200 Series

1. Provide remote control relays connected to supervised ancillary circuits for control of fans, etc. Relay contact ratings shall be DPDT and rated for 10 amperes at 115 Vac. A single relay may be energized from a voltage source of 24 Vdc, 24 Vac, 115 Vac, or 230 Vac. A red LED



shall indicate the relay is energized. A metal enclosure shall be provided.

V. Wall Mounted, 1504/1505/1508/1509 Series

1. Provide flush, semi-flush or surface wall mounted electromagnetic doorholder/releases rated at 24 Vac/dc as directed by the Commissioner. Finish shall be brushed zinc.

W. Code Cards And Holders: Shall be red painted, steel, frame code card holder with clear, Acrylic window and a minimum five inch wide by eight inch high (5" W. X 8"H.) code card. Each code card shall be of adequate size to list the all the alarm codes and area descriptions served by each alarm initiating circuit in the building. Provide one (1) code card and holder at each manual fire alarm station in the building, at the remote annunciator panel and at the FACP.

X. Operating Instruction/Riser Diagram Holders: Shall be red painted steel, frame holder with clear, Acrylic window with nine inch by twelve inch (9" x 12") dimensions. One (1) holder shall be provided for the fire alarm control panel (FACP)/system operating instructions and one (1) holder shall be provided for a reduced copy (8-1/2" X 11") of the fire alarm system riser diagram. The operating instruction and riser diagram holders shall be mounted adjacent to the fire alarm control panel (FACP).

Y. Fire Alarm System Fused Cut-out:

1. The Contractor shall provide an individual cartridge fused cut-out panel with three (3) poles and a removable, solid copper, neutral bar in fuse gap for the FCS and remote transponders.
2. Fused cut-outs shall be provided with silver sand fuses, current limiting type with an interrupting capacity rating of 200,000 amps (r.m.s. symmetrical). The size of the fuses shall be thirty (30) amperes.
3. The fused cut-out panel shall bear an engraved white-core phenolic or bakelite identification nameplate stating in minimum one-quarter inch (1/4") high white letters on a red background "FIRE ALARM FUSED CUT-OUT".

Z. Fire Alarm Fusible Disconnect Switch:

1. The Contractor shall provide an individual cartridge fused disconnect switch with three (3) poles and a removable, solid copper, neutral bar in fuse gap for the FCS and remote transponders. The switch shall be capable of being locked in the OPEN position.



2. Fused Disconnect Switches shall be provided with silver sand fuses, current limiting type with an interrupting capacity rating of 200,000 amps (r.m.s. symmetrical). The size of the fuses shall be thirty (30) amperes.
3. The fused switches shall bear an engraved white-core phenolic or bakelite identification nameplate stating in minimum one-quarter inch (1/4") high white letters on a red background "FIRE ALARM FUSED DISCONNECT SWITCH".
4. A four (4) wire feeder shall bring three phase 120/208 volt service to the fused disconnect switch. The feeder shall be tapped off the main building service ahead of the main service switch but after the Current Transformers (Metering Transformers).

PART III - EXECUTION

3.1 INSTALLATION

- A. The entire system shall be installed in a workmanlike manner, in accordance with approved manufacturer's wiring diagram. The contractor shall furnish all conduit, wiring, outlet boxes, junction boxes, cabinets and similar devices necessary for the complete installation. All wiring shall be of the type recommended by the manufacturer, approved by the local Fire Department, NYC code, and specified with in. All conduit and wire shall meet the requirements of applicable code.
- B. All penetration of floor slabs and firewalls shall be sleeved (1" conduit minimum) fire stopped in accordance with all local fire codes.
- C. End of Line Resistors shall be furnished as required for mounting as directed by the manufacturer. Devices containing end-of-line resistors shall be appropriately labeled. Devices should be labeled so removal of the device is not required to identify the EOL device.
- D. All manual pull stations shall be mounted 48 inches above the finished floor, as measured to the handle.
- E. All audio/visual devices shall be mounted 80 inches above the finished floor, as measured to the lens. Devices shall be mounted no less than 6 inches from the ceiling. Audio visual devices shall be mounted per NYC Building Code.
- F. No area smoke detectors shall be mounted within 36 inches of any HVAC supply, return air register or lighting fixture.
- G. No area smoke or heat detector shall be mounted within 12 inches of any wall. All detectors shall be installed in strict accordance with NFPA 72 as amended in NYC BUILDING CODE guidelines for such devices.



- H. All mechanical rooms, boiler rooms, wiring closets, custodian rooms, attic spaces, etc. or areas with no hung ceilings shall be piped with 3/4" conduit and installed as necessary by NYC Code. All areas in public view shall be in metal conduit. All boxes must be painted red and labeled "INTERIOR FIRE ALARM".
- I. All addressable modules shall be mounted within 36 inches of the monitored or controlled point of termination. This shall include, but is not necessarily limited to, fan shutdown, elevator recall, shunt trip, sprinkler status points, or door release. Label all addressable modules as to their function.
- J. All low voltage wiring terminated to the fire alarm system shall be PLENUM RATED with no exceptions and no less than No. 12 AWG in size for NAC circuits and 16 AWG for Initiating Circuits, and solid copper per applicable codes. Exposed wire above 8ft AFF shall be 150 degrees C and as specified in NYC code.
- K. All line voltage (120VAC) wiring shall be no less than No. 12 AWG in size, and solid copper. This shall include all system grounding. FACP must have a DEDICATED fuse cut out arranged per NYC code.
- L. All wiring shall be color-coded throughout, to National Electrical Code standards and NYC codes.
- M. Power-limited/Non-power-limited NEC wiring standards SHALL BE OBSERVED.
- N. All junction box covers shall be painted red and labeled INTERIOR FIRE ALARM SYSTEM.
- O. Fire alarm system wiring shall not co-mingle with any other system wiring in the facility. Conduits shall not be shared under any circumstance. Only when fire alarm wiring enters the enclosure of a monitored or controlled system will co-habitation be permitted (i.e. at fan starters or elevator controllers). THIS WILL BE FIELD INSPECTED BY THE COMMISSIONER.
- P. Fire alarm control panel enclosures shall have engraved labels indicating, "INTERIOR FIRE ALARM SYSTEM", and the areas of the building served by that panel.
- Q. Auxiliary relays shall be appropriately labeled to indicate "FIRE ALARM SYSTEM" and their specific function (i.e. FAN S-1 SHUTDOWN).
- R. All fire alarm wiring shall be continuous and un-spliced. Terminations shall only occur at fire alarm devices or control panel enclosures under terminal screws. All other splicing methods are specifically disallowed (i.e. plastic wirenuts).
- S. All fire alarm wiring shall be installed using a dedicated system of supports (i.e. bridle rings). Fire alarm wiring shall not be bundled or strapped to existing conduit, pipe or wire in the facility. THIS WILL BE FIELD INSPECTED BY THE COMMISSIONER.



- T. All fire alarm wiring shall be sleeved when passing through any wall, using conduit sleeves (1" min.) with bushings, and fire stopped in accordance with Code.
- U. The system shall be arranged to receive power from one three wire 120 Vac, 20 A supply. All low voltage operation shall be provided from the fire alarm control panel.
- V. All fire alarm devices shall be accessible for periodic maintenance. Should a device location indicated on the Contract Drawings not meet this requirement, it shall be the responsibility of the installing contractor to bring it, in writing, to the attention of the Commissioner. Failure to bring such issues to the attention of the Project Commissioner shall be the exclusive liability of the installing Contractor.
- W. The installing Contractor shall be responsible for the removal of ENTIRE existing fire alarm system components and controls on the demolition drawing shown or not, upon approval of the City of New York and the Commissioner. The City of New York reserves the right to retain any existing fire alarm system components, upon their request. All existing fire alarm system components requiring special handling for disposal (due to radioactivity) shall be the responsibility of the installing contractor. Written proof of proper disposal by the installing contractor shall be required prior to release of outstanding retainage.

3.2 FIELD QUALITY CONTROL

- A. The system shall be installed and fully tested under the supervision of a trained manufacturer's representative. The system shall be demonstrated to perform all of the function as specified.
- B. The installing contractor or fire alarm equipment vendor shall have no less than two (2) NICET Level II fire alarm technicians dedicated to this project.
- C. The Installing Contract and the Fire Alarm System Vendor shall, upon the request of the Commissioner or City of New York, attend any and all project meetings for the purpose of accurately determining progress.
- D. It shall be the responsibility of the installing contractor to assure that construction debris does not adversely affect any sensing devices installed as part of this project. Should it be deemed necessary by the Commissioner or City of New York, the installing contractor shall be responsible for the cleaning of all smoke detectors prior to final acceptance.

3.3 TESTS



- A. The fire alarm system vendor shall test the system in accordance with the manufacturer's requirements and NFPA 72 as amended by the NYC Building Code. The vendor shall provide completed reports to the Commissioner for review and approval prior to final acceptance.
- B. Each individual system operation on a circuit-by-circuit basis shall be tested for its complete operation. The procedure for testing the entire fire alarm system shall be set forth with the consent of the code enforcement official, the Commissioner and the manufacturer.

3.4 DOCUMENTATION AND INSTRUCTION

- A. The contractor shall compile and provide to the City of New York three (3) complete manual on the completed system to include SITE SPECIFIC operating and maintenance instruction, catalog cuts of all equipment and components, as-built wiring diagrams and a manufacturer's suggested spare parts list, and an end user instruction video on DVD disk.
- B. In addition to the above manuals, the Electrical Contractor shall provide the services of the manufacturer's trained representative for two (2) separate calendar days for a period of four (4) hours per day to instruct the City of New York's designated personnel on the operation and maintenance of the entire system.
- C. As-built drawings shall consist of the following:
 - 1. Complete revision of all previously submitted drawings
 - 2. Point-to-point depiction of all device wiring on the device layout floor plans.
 - 3. One (1) set of B-size, laminated as-built drawings.
 - 4. Two (2) sets of 30"x42" inch 1/16"=1' scale drawings showing all points of fire alarm. One set shall be submitted with the close-out documents. Second set shall be mounted in frame with a lexan cover. These drawing must be submitted to project Commissioner or approval.
- D. Turnover of all software database hard/soft copies shall be required. This shall include all possible programming software logs, diskettes or CDs containing exported project files, hard copies of all device maps, the revision number of the version of programming utility used, and all required passwords. The turnover of all database information shall occur prior to the end of the One (1) year warranty period (or period as amended earlier in this specification).

END OF SECTION 283101

FMS ID: LNXEA08BX



Department of
Design and
Construction

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

Two (2) Bronx Branch Libraries - Replacement of HVAC & BMS

LOCATION: 2150 University Ave and 1215 Morrison Ave
BOROUGH: Bronx 10453 and 10472
CITY OF NEW YORK

Contractor _____

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper _____

Dated _____, 20____

