



**Department of
Design and
Construction**

**CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS
VOLUME 1 – BID BOOKLET
SINGLE PLA CONTRACT VERSION**

TABLE OF CONTENTS

Introduction 2

Bid Submission Requirements..... 3

Notices to Bidders 4

 Project Labor Agreement & Single Contract 4

 Pre Bid Questions (PBQs) 4

 NYC Contract Financing Loan Fund 4

M/WBE Notice to Prospective Contractors 5

Affirmation 13

Pre-Award Process 15

Project References 17

 A. Contracts completed by the bidder 17

 B. Contracts currently under construction by the bidder 18

 C. Pending contracts not yet started by the bidder 19

Introduction

This Bid Booklet is intended to provide general information necessary for bidding on a DDC public works project and is part of the Contract Documents, as per Article 1.1 of the Standard Construction Contract.

As this contract is solicited via the PASSPort system, the bidder will be required to complete all of the PASSPort forms and questionnaires. These forms and questionnaires, along with the bidder's responses, will become part of the Bid Booklet.

Additional information on the PASSPort system can be found at the following website:

<https://www1.nyc.gov/site/mocs/systems/passport-user-materials.page>

Bid Submission Requirements

THE FOLLOWING MUST BE COMPLETED AND SUBMITTED FOR THE BID TO BE CONSIDERED RESPONSIVE:

1. Completed electronic bid submission in PASSPort;
 - a. All required fields in PASSPort must be completed.
2. Bid security, if required.
 - a. If Bid security is in a form of a bid bond, bidders must include it with their electronic PASSPort submission.
 - b. If Bid security is in a form of a certified check, bidders must hand deliver the certified check.

BIDDERS ARE ADVISED THAT PAPER BID SUBMISSIONS WILL BE DEEMED NON-RESPONSIVE. BIDDERS MUST SUBMIT THEIR BIDS ELECTRONICALLY IN PASSPORT AND PROVIDE THE BID SECURITY FOR THE BID TO BE CONSIDERED RESPONSIVE.

THE FOLLOWING MAY RESULT IN THE BID BEING FOUND NON-RESPONSIVE:

1. Failure to upload required files or documents as part of a mandatory PASSPort Questionnaire response.
2. Uploading an incorrect file as part of a mandatory PASSPort Questionnaire response.

Notices to Bidders

Project Labor Agreement & Single Contract

PROJECT LABOR AGREEMENT: This contract is subject to a Project Labor Agreement (“PLA”) entered into between the City and the Building and Construction Trades Council of Greater New York (“BCTC”) affiliated Local Unions. By submitting a bid, the Contractor agrees that the PLA is binding on the Contractor and all subcontractors of all tiers. The bidder to be awarded the contract will be required to execute a “Letter of Assent” prior to award.

The Bidder is advised to review the following: (1) Notice regarding the PLA, (2) the PLA, and (3) the Letter of Assent, all of which are set forth at the beginning of Volume 2 of the Contract Documents.

SINGLE CONTRACT: As stated above, this contract is subject to a PLA. The requirements of the Wicks Law for separate prime contractors DO NOT APPLY to any project that is covered by a PLA. Accordingly, the requirements of the Wicks Law for separate prime contractors do not apply to this Project. The Project consists of a single contract.

The Bidder is advised to review the Notice set forth at the beginning of Volume 2 of the Contract Documents. The Notice specifies revisions to the Contract Documents to provide that the Project consists of a single contract and to delete any and all references to separate prime contractors.

Pre Bid Questions (PBQs)

Please be advised that PBQs must be submitted to the Agency Contact Person via PASSPort (in the RFx Discussions with buyer section) within the timeframe indicated in the PASSPort procurement.

NYC Contract Financing Loan Fund

If your business is working as a prime or subcontractor on a project with a City agency or City-funded entity, you may be eligible for a Contract Financing Loan from a participating lender coordinated with the NYC Department of Small Business Services (SBS). Loan repayment terms align with the contract payment schedule.

For more information: Call 311 or visit <https://www1.nyc.gov/nycbusiness/article/contract-financing-loan-fund>

M/WBE Notice to Prospective Contractors

PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS ENTERPRISES IN CITY PROCUREMENT (9/2020 version)

ARTICLE I. M/WBE PROGRAM

Section 6-129 of the Administrative Code of the City of New York (“Section 6-129”) establishes the program for participation in City procurement (“M/WBE Program”) by minority-owned business enterprises (“MBEs”) and women-owned business enterprises (“WBEs”), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City’s procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services (“DSBS”) promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the “M/WBE Utilization Plan”) and are detailed below. Contracts solicited through the Procurement and Sourcing Solutions Portal (PASSPort) will contain a Schedule B in the format outlined in the Schedule B – M/WBE Utilization Plan & PASSPort rider. The provisions of this notice will apply to contracts subject to the M/WBE Program established by Section 6-129 regardless of solicitation source.

The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129.

References to MBEs or WBEs shall also include such businesses certified pursuant to the executive law where credit is required by section 311 of the New York City Charter or other provision of law.

Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts.

Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD

AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, (“**Participation Goals**”), as applicable, are set forth on Schedule B, Part 1 to this Contract (see Page 1, Line 1 Total Participation Goals) or will be set forth on Schedule B, Part 1 to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with DSBS as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part 2 (see Pages 1-2) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end; as well as the name, addresses, and telephone numbers of the M/WBE subcontractors if required by the solicitation; and (d) the prospective contractor's required certification and affirmations. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the **Participation Goals** in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part 2 (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part 2 (see Pages 1-2) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end; as well as the name, addresses, and telephone numbers of the M/WBE subcontractors if required by the solicitation; and (d) the prospective contractor’s required certification and affirmations. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the **Participation Goals** in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART 2). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART 3). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an **M/WBE** Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi-year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work.** In the event that the Contractor’s selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms’ participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the

firms' commencement of work. A list of city-certified MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6451, or by visiting or writing DSBS at One Liberty Plaza, New York, New York, 10006, 11th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an **M/WBE** Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's **M/WBE** Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its **M/WBE** Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an **M/WBE** Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**.

(a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the Participation Goals in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part 3 of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at MWBEModification@ddc.nyc.gov. Full or partial waiver requests that are received later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due may be rejected as untimely. Bidders, proposers, or contractors, as applicable, who have submitted timely requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an

Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the **Participation Goals** to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of

subcontracting in its **M/WBE** Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the **Participation Goals**. In making such determination, Agency may consider whether the **M/WBE** Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of **M/WBE** Utilization Plan. (a) A Contractor may request a modification of its **M/WBE** Utilization Plan after award of this Contract. **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission.** The Agency may grant a request for Modification of a Contractor’s **M/WBE** Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the **Participation Goals**. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

(i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women’s business organizations;

(ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women’s business organizations;

(iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;

(iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the **M/WBE** Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;

(v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;

(vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;

(vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;

(viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its **M/WBE Utilization Plan** would be awarded to subcontractors.

12. If the Contractor was required to identify in its bid or proposal the MBEs and/or WBEs they intended to use in connection with the performance of the Contract or Task Order, substitutions to the identified firms may only be made with the approval of the Agency, which shall only be given when the Contractor has proposed to use a firm that would satisfy the **Participation Goals** to the same extent as the firm previously identified, unless the Agency determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts. In making such determination, the Agency shall require evidence of the efforts listed in Section 11(a) above, as applicable, along with any other relevant factors.

13. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an **M/WBE Utilization Plan** and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its **M/WBE Utilization Plan**, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

15. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B

MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of a **M/WBE Utilization Plan**, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE Utilization Plan**.

2. Pursuant to DSBS rules, construction contracts that include a requirement for a **M/WBE** Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.
3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.
4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).
5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.
2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE** Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.
3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE** Utilization Plan, Agency may determine that one of the following actions should be taken:
 - (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
 - (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
 - (c) making a finding that the Contractor is in default of the Contract;
 - (d) terminating the Contract;
 - (e) declaring the Contractor to be in breach of Contract;
 - (f) withholding payment or reimbursement;
 - (g) determining not to renew the Contract;
 - (h) assessing actual and consequential damages;

(i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;

(j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or

(k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in PASSPort as caution data.

Affirmation

The Bidder affirms and declares:

1. The said bidder is of lawful age and the only one interested in this bid; and no person, firm or corporation other than hereinbefore named has any interest in this bid, or in the Contract proposed to be taken.
2. By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief: (1) the prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or with any competitor; (2) unless otherwise required by law, the prices quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor; and (3) no attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.
3. No councilman or other officer or employee or person whose salary is payable in whole or in part from the City Treasury is directly or indirectly interested in this bid, or in the supplies, materials, equipment, work or labor to which it relates, or in any of the profits thereof.
4. The bidder is not in arrears to the City of New York upon debt or contract or taxes, and is not a defaulter, as surety or otherwise, upon any obligation of the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York or State of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except as disclosed in PASSPort.
5. The bidder hereby affirms that it has paid all applicable City income, excise and other taxes for all it has conducted business activities in New York City.
6. The bidder, as an individual, or as a member, partner, director or officer of the bidder, if the same be a firm, partnership or corporation, executes this document expressly warranting and representing that should this bid be accepted by the City and the Contract awarded to him, he and his subcontractors engaged in the performance:

(1) will comply with the provisions of Section 6-108 of the Administrative Code of the City of New York and the non-discrimination provisions of Section 220a of the New York State Labor Law, as more expressly and in detail set forth in the Agreement; (2) will comply with Section 6-109 of the Administrative Code of the City of New York in relation to minimum wages and other stipulations as more expressly and in detail set forth in the Agreement; (3) have complied with the provisions of the aforesaid laws since their respective effective dates, and (4) will post notices to be furnished by the City, setting forth the requirements of the aforesaid laws in prominent and conspicuous places in each and every plant, factory, building and structure where employees engaged in the performance of the Contract can readily view it, and will continue to keep such notices posted until the supplies, materials and equipment, or work labor and services required to be furnished or rendered by the Contractor have been finally accepted by the City. In the event of any breach or violation of the foregoing, the Contractor may be subject to damages, liquidated or otherwise, cancellation of the Contract and suspension as a

bidder for a period of three years. (The words, "the bidder", "he", "his", and "him" where used shall mean the individual bidder, firm, partnership or corporation executing this bid).

7. Compliance Report

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, (1) represents that his attention has been specifically drawn to Executive Order No. 50, dated April 25, 1980, on Equal Employment Compliance of the contract, and (2) warrants that he will comply with the provisions of Executive Order No. 50. The Employment Report must be submitted as part of the bid.

8. The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, executes this document expressly warranting that he will comply with: (1) the provision of the contract on providing records, Chapter 8.
9. By submission of this bid, the bidder certifies that it now has and will continue to have the financial capability to fully perform the work required for this contract. Any award of this contract will be made in reliance upon such certification. Upon request therefor, the bidder will submit written verification of such financial capability in a form that is acceptable to the department.
10. In accordance with Section 165 of the State Finance Law, the bidder agrees that tropical hardwoods, as defined in Section 165 of the State Finance Law, shall not be utilized in the performance of this Contract, except as the same are permitted by the foregoing provision of law.
11. The bidder has visited and examined the site of the work and has carefully examined the Contract in the form approved by the Corporation Counsel, and will execute the Contract and perform all its items, covenants and conditions, and will provide, furnish and deliver all the work, materials, supplies, tools and appliances for all labor and materials necessary or required for the hereinafter named work, all in strict conformity with the Contract, for the prices set forth in the Bid Schedule.
12. M/WBE UTILIZATION PLAN: By signing its bid, the bidder agrees to the M/WBE Vendor Certification and Required Affirmations set forth below, unless a full waiver of the Participation Goals is granted.

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth in this Contract and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of the M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and

agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

Pre-Award Process

The bidder is advised that as part of the pre-award review of its bid, it may be required to submit the information described in Sections (A) through (D) below. If required, the bidder must submit such information within five (5) business days following receipt of notification from DDC that it is among the low bidders. Such notification from DDC will be by email and will specify the types of information which must be submitted directly to DDC.

In the event the bidder fails to submit the required information within the specified time frame, its bid may be rejected as nonresponsive.

- (A) **Project Reference Form:** If required, the bidder must complete and submit the Project Reference Form set forth in this Bid Booklet. The Project Reference Form consists of 3 parts: (1) Contracts Completed by the Bidder, (2) Contracts Currently Under Construction by the Bidder, and (3) Pending Contracts Not Yet Started by the Bidder.
- (B) **Copy of License:** If required, the bidder must submit a copy of the license under which the bidder will be performing the work. Such license must clearly show the following: (1) Name of the Licensee, (2) License Number, and (3) Expiration date of the License. A copy of the license will be required from bidders for the following contracts: Plumbing Work, Electrical Work and Asbestos Abatement.
- (C) **Financial Information:** If required, the bidder must submit the financial information described below:
 - (1) **Audited Financial Statements:** Financial statements (Balance Sheet and Income Statement) of the entity submitting the bid, as audited by an independent auditor licensed to practice as a certified public accountant (CPA). Audited financial statements for the three most recent fiscal years must be submitted. Each such financial statement must include the auditor's standard report.

If the bidder does not have audited financial statements, it must submit an affidavit attesting to the fact that the bidder does not have such statements. In addition, the bidder must submit the following documentation covering the three most recent fiscal years: signed federal tax returns, unaudited financial statements, and a "certified review letter" from a certified public accountant (CPA) verifying the unaudited financial statements.

Unless the most recent audited or unaudited financial statement was issued within ninety (90) days, the bidder must submit interim financial information that includes data on financial position and results of operation (income data) for the current fiscal year. Such information may be summarized on a monthly or quarterly basis or at other intervals.

- (2) **Schedule of Aged Accounts Receivable,** including portion due within ninety (90) days.

(D) **Project Specific Information:** If required, the bidder must submit the project specific information described below:

- (1) Statement indicating the number of years of experience the bidder has had and in what type of construction.
- (2) Resumes of all key personnel to be involved in the project, including the proposed project superintendent.
- (3) List of significant pieces of equipment expected to be used for the contract, and whether such equipment is owned or leased.
- (4) Description of work expected to be subcontracted, and to what firms, if known.
- (5) List of key material suppliers.
- (6) Preliminary bar chart time schedule
- (7) Contractor's expected means of financing the project. This should be based on the assumption that the contractor is required to finance 2X average monthly billings throughout the contract period.
- (8) Any other issues the contractor sees as impacting his ability to complete the project according to the contract.

In addition to the information described in Sections (A) through (D) above, the bidder must submit such additional information as the Commissioner may require, including without limitation, an additional bid breakdown file which is detailed to the CSI Section level, coordinated with the Contract specifications, as well as an explanation or justification for specific unit price items.

The bidder is further advised that it may be required to attend a pre-award meeting with DDC representatives. If such a meeting is convened, the bidder will be advised as to any additional material to be provided.



General Contractors • Construction Management

WORK COMPLETED

Suffolk County DPW - Fire Rescue Building Improvements - Phase 2	\$290,300.00
102 East Ave., Yaphank, NY 11980	
Owner: Suffolk County DPW	Contract #: 22/0124LPWI
335 Yaphank Ave., Yaphank, NY 11980	Stalco #: 2209
Contact: Kenneth Phalen (631) 852-4222	
Construction Manager:	
Contact:	
Architect: Nelson & Pope	Award Date: May 2022
Contact:	Completed:
Plainedge UFSD - Plainedge Middle School Freestanding Courtyard Greenhouse	\$361,000.00
200 Stewart Ave., Bethpage, NY 11714	
Owner: Plainedge UFSD	Contract #: 20-008
241 Wyngate Dr., N. Massapequa, NY 11758	Stalco #: 2121
Contact: (516) 992) 7458	
Construction Manager: N/A	
Contact:	
Architect: MDS	Award Date: July 2021
Contact: Michael Mark	Completed: August 2021
Locust Valley CSD - Elevator Addition at Bayville Primary School	\$564,000.00
50 Godfrey Ave., Bayville, NY 11790	
Owner: Locust Valley CSD	Contract #: SED # 28-05-003-06-0-009-012
22 Horse Hollow Rd., Locust Valley, NY 11560	Stalco #: 2120
Contact:	
Construction Manager: N/A	
Contact:	
Architect: Campbell Cassetta Architects PC	Award Date: July 2021
Contact: Robert Brown (631) 587-1984	Completed: May 2022
Harborfields CSD - Library Renovations at Harborfields High School	\$357,000.00
98 Taylor Ave., Greenlawn, NY 11740	
Owner: Harborfields CSD	Contract #: SED# 58-04-06-06-0-001-030
2 Oldfield Rd., Greenlawn, NY 11740	Stalco #: 2118
Contact:	
Construction Manager: Triton Construction Co.	
Contact: George Leeman	
Architect: BBS	Award Date: June 2021
Contact: Steve Walsh (631) 475-0349	Completed: December 2021

Elwood UFSD - Bond Phase 2 & 3 Building Improvements at Various Schools Base Bid GC-1		\$2,002,000.00
Various		
Owner: Elwood UFSD	Contract #:	BBS Project Nos. 19-111 (GIS Ph. 3), 19-113 (BIS Ph. 3), 19-114 (HS Ph. 3), and 18-178 (EMS Ph. 2), 18-180 (HS Ph. 2)
100 Kenneth Ave., Greenlawn, NY 11740	Stalco #:	2114
Contact:		
Construction Manager: Park East		
Contact: Christine DaSilva		
Architect: BBS Architects	Award Date:	May 2021
Contact: Peter Dawkins	Completed:	February 2022
Hauppauge UFSD - Middle School & High School Site & Bathroom Renovations		\$1,128,000.00
Various		
Owner: Hauppauge UFSD	Contract #:	SED# 58-05-06-03-0-008-049 SED# 58-05-06-03-0-002-031
495 Hoffman Lane, Hauppauge, NY 11788	Stalco #:	2111
Contact: Jacaueline Pirro (631) 761-8211		
Construction Manager: Triton		
Contact: George Leeman		
Architect: BBS Architects	Award Date:	May 2021
Contact: Steve Walsh (631) 475-0349	Completed:	June 2022
Carl Place UFSD - Cherry Lane Elementary School Exterior Wall & Classroom Renovations		\$983,300.00
475 Roslyn Ave., Carle Place, NY 11514		
Owner: Carle Place UFSD	Contract #:	SED# 28-0-11-03-0-003-024
168 Cherry Lane, Carle Place, NY 11514	Stalco #:	2110
Contact: Kevin Coffey		
Construction Manager: Advanced Construction Group		
Contact: Frank Marino		
Architect: H2M Architects + Engineers	Award Date:	March 2020
Contact: Jason Smith (631) 756-8000	Completed:	September 2021
Oceanside UFSD - 2020-2021 CIP - Oceanside High School		\$981,437.00
145 Merle Ave., Oceanside, NY 11572		
Owner: Oceanside UFSD	Contract #:	SED#: 28-02-11-03-0-008-038
145 Merle Ave., Oceanside, NY 11572	Stalco #:	2108
Contact:		
Construction Manager: N/A		
Contact:		
Architect: JAG	Award Date:	April 2021
Contact: Robert Cascone	Completed:	March 2022
Nassau BOCES - Exterior Upgrades at George Farber Administrative Center		\$628,000.00
71 Clinton Rd., Garden City, NY 11530		
Owner: Nassau BOCES	Contract #:	SED# 28-90-00-00-1-137-007 SED# 28-90-00-00-1-137-008
71 Clinton Rd., Garden City, NY 11530	Stalco #:	2105
Contact: (516) 396-2500		
Construction Manager: N/A		
Contact:		
Architect: H2M Architects + Engineers	Award Date:	April 2021
Contact: David Sherland	Completed:	March 2022

West Hempstead UFSD - Rebid - Various Locations		\$658,000.00
Various		
Owner: West Hempstead UFSD	Contract #:	SED #28-02-27-03-0-004-013 SED #28-02-27-03-0-001-022 SED #28-02-27-03-0-005-033
252 Chestnut St., West Hempstead, NY 11552	Stalco #:	2103
Contact:		
Construction Manager: SCC		
Contact: Vincent Pacheco		
Architect: Tetra Tech	Award Date:	March 2021
Contact: Ervin Hall	Completed:	May 2022
Baldwin UFSD - Elevator Addition at Plaza Elementary School		\$967,300.00
501 Seaman Ave., Baldwin, NY 11510		
Owner: Baldwin UFSD	Contract #:	SED #28-02-10-03-0-007-024
960 Hastings St., Baldwin, NY 11510	Stalco #:	2102
Contact: Jason Smith (631) 756-8000		
Construction Manager: H2M		
Contact: Stefan D. Reiss		
Architect: H2M Architects + Engineers	Award Date:	March 2021
Contact: Jason Smith (631) 756-8000	Completed:	May 2022
Connetquot CSD - Phase 3 - Cherokee-Slocum- Press Box		\$886,000.00
Various		
Owner: Connetquot CSD	Contract #:	SED#58-05-07-06-0-004-032 SED#58-05-07-06-0-012-029 SED#58-05-07-06-7-025-001
780 Ocean Ave., Bohemia, NY 11716	Stalco #:	2101
Contact:		
Construction Manager: N/A		
Contact:		
Architect: JAG	Award Date:	March 2021
Contact: John Grillo (631) 476-2161	Completed:	September 2022
SUCF - SUNY Downstate Medical Center - Construct Infrastructure Riser BSB		\$3,924,400.00
450 Clarkson Ave., Brooklyn, NY		
Owner: State University Construction Fund	Contract #:	141056-00
State University Plaza, 353 Broadway, Albany, NY 12246	Stalco #:	2013
Contact: Magaret McSorley (518) 320-1710		
Construction Manager: Ellana		
Contact: Steve Berezniysky		
Architect: Lothrop Associates	Award Date:	September 2020
Contact: Thomas McDermott	Completed:	March 2022
DASNY - Broad Channel Athletic Club Storage Building		\$2,339,534.00
125 Crossbay Blvd., Broad Channel, NY 11693		
Owner: DASNY	Contract #:	3277109999
515 Broadway, Albany, NY 12207	Stalco #:	2001
Contact: Malik Dokku		
Construction Manager: N/A		
Contact:		
Architect: H2M Architects + Engineers	Award Date:	April 2020
Contact:	Completed:	August 2020

Syosset CSD - Fitness Center Addition at Syosset High School		\$3,000,036.00
70 South Woods Rd., Syosset, NY 11791		
Owner: Syosset CSD	Contract #:	SED# 28-05-02-06-0-010-049
99 Pell Lane, Syosset, NY 11791	Stalco #:	1921
Contact: Greg Hamilton (516) 364-5600		
Construction Manager: Park East Construction Corp.		
Contact:		
Architect: H2M	Award Date:	July 2019
Contact: (631) 756-8000	Completed:	
West Babylon UFSD - Phase 4 & 5 Bond Projects		\$1,723,010.00
Various		
		SED# 58-01-02-03-0-003-020
		SED# 58-01-02-03-0-001-032
Owner: West Babylon UFSD	Contract #:	SED# 58-01-02-03-0-001-033
		SED# 58-01-02-03-0-005-022
		SED# 58-01-02-03-0-008-025
200 Old Farmingdale Rd., West Babylon, NY 11704	Stalco #:	1917
Contact: (631) 3746-7701		
Construction Manager: SCC		
Contact:		
Architect: BBS	Award Date:	May 2019
Contact: Karalisa	Completed:	December 2019
Hicksville UFSD - 2017/2018 Capital Improvement Program - East St. ES		\$326,195.82
50 East Street, Hicksville, NY 1181		
Owner: Hicksville UFSD	Contract #:	28-05-17-03-0-003-030
200 Division Ave., Hicksville, NY 11801	Stalco #:	1911
Contact:		
Construction Manager: Park East Construction		
Contact:		
Architect: JAG	Award Date:	April 2019
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com	Completed:	September 2019
Island Park UFSD - Structural Slab Repairs at Francis X. Hegarty ES		\$789,429.94
100 Radcliffe Road, Island Park, NY 11558		
Owner: Island Park UFSD	Contract #:	28-02-31-02-0-001-012
99 Radcliffe Road, Island Park, NY 11558	Stalco #:	1906
Contact:		
Construction Manager: N/A		
Contact:		
Architect: BBS Architects	Award Date:	March 2019
Contact: Steve Walsh (631) 475-0349 swalsh@bbsarch.com	Completed:	September 2019
Merrick UFSD - Districtwide A/C Upgrades & Classroom Toilet Room Renovations		\$1,920,000.00
Various		
Owner: Merrick UFSD	Contract #:	CB-1
21 Babylon Rd., Merrick, NY 11566	Stalco #:	1904
Contact: (516) 992-7260		
Construction Manager: N/A		
Contact:		

Architect: BBS
Contact: (631) 475-0349

Award Date: February 2019
Completed: March 2020

Port Washington UFSD - Security Entry Vestibules & Interior Reconstruction at Various Schools **\$1,388,500.00**
Port Washington, NY 11050

Port Washington UFSD

90 Avenue C, Port Washington, NY 11050

Contact:

Construction Manager: School Construction Constultants

Contact: (631) 567-0200

Architect: BBS

Contact: (631) 475-0349

S.E.D. NO. 28-04-04-03-0-010-028, 28-04-04-03-0-005-026, 28-04-04-03-0-003-027, 28-04-04-03-0-008-006, 28-04-04-03-0-001-038, 28-04-04-03-0-007-026
Contract #:
Stalco #: 1902

Award Date: March 2019
Completed: August 2020

Northport-East Northport UFSD - Bond Issue Related Capital Improvement Program Phase 2 - Rebid **\$220,674.00**
Northport, NY 11768

Owner: Northport-East Northport UFSD

158 Laurel Ave., Northport, NY 11768

Contact:

Construction Manager: N/A

Contact:

Architect: JAG

Contact: John Grillo (631) 476-2161

Contract #: SED 58-04-04-03-0-002-017, 58-04-04-03-0-004-021
Stalco #: 1901

Award Date: January 2019
Completed: November 2020

Bridgehampton UFSD - Bond Issue Related Capital Improvement Program at Elementary & High School **\$18,540,300.00**
2685 Montauk Hwy., Bridgehampton, NY 11932

Owner: Bridgehampton UFSD

2685 Montauk Hwy., Bridgehampton, NY 11932

Contact:

Construction Manager: N/A

Contact:

Architect: JAG

Contact: John Grillo (631) 476-2161

Contract #: SED 58-09-09-02-0-001-016
Stalco #: 1824

Award Date: October 2018
Completed: June 2021

Suffolk County Community College - Kreiling Hall Renovation **\$7,161,550.00**
533 College Rd., Selden, NY 11784

Owner: Suffolk County Community College

533 College Rd., Selden, NY 11784

Contact: (631) 451-4112

Construction Manager: N/A

Contact:

Architect: WFC

Contact: Bill Brady (631) 689-8450

Contract #: 19-CC-024
Stalco #: 1821

Award Date: October 2018
Completed: September 2019

Bayport-Blue Point UFSD - District Wide Security Vestibules **\$297,524.00**
Bayport-Blue Point, NY

Owner: Bayport-Blue Point UFSD

189 Academy St., Bayport, NY 11705

58-05-05-02-0-004-021, 58-05-05-02-0-011-014, 58-05-05-02-0-002-016, 58-05-05-02-0-001-016, 58-05-05-02-0-006-012
Contract #:
Stalco #: 1810

Contact: (631) 472-7860
Construction Manager: Park East Construction
Contact: (631) 549-9800
Architect: BBS
Contact: (631) 475-0349

Award Date: March 2018
Completed: October 2019

Three Village CSD - 2016/17 & 2017/18 Capital Improvement Program at Various Schools **\$2,265,000.00**
Stony Brook, NY 11790

Owner: Three Village CSD

100 Suffolk Ave., Stony Brook, NY 11790

Contact:

Construction Manager: N/A

Contact:

Architect: JAG

Contact:(631) 476-2161

Contract #: SED 58-02-01-06-0-002-031, 58-02-01-06-0-006-031, 58-02-01-06-0-007-030, 58-02-01-06-0-008-039, 58-02-01-06-0-008-040, 58-02-01-06-0-014-030, 58-02-01-06-0-015-036
Stalco #: 1812

Award Date: March 2018
Completed: October 2018

Bayport-Blue Point UFSD - Bond Phase 3 - Bldg. & Site Improvements at Various Schools **\$561,782.00**
Bayport, NY 11705

Owner: Bayport-Blue Point UFSD

189 Academy St., Bayport, NY 11705

Contact:

Construction Manager: Park East Construction

Contact: (631) 549-9800

Architect: BBS

Contact: (631) 475-0349

Contract #: SED 58-05-05-02-0-002-017, 58-05-05-02-0-001-019, 58-05-05-02-0-006-014
Stalco #: 1818

Award Date: August 2018
Completed: November 2019

East Rockaway UFSD - FEMA Grant Rebid **\$2,218,675.00**
East Rockaway, NY 11518

Owner: East Rockaway UFSD

443 Ocean Ave., East Rockaway, NY 11518

Contact:

Construction Manager: N/A

Contact:

Architect: JAG

Contact: John Grillio (631) 476-2161

Contract #: SED 28-02-19-03-0-001-037, 28-02-19-03-0-002-014, 28-02-19-03-0-004-002
Stalco #: 1805

Award Date: February 2018
Completed: May 2020

Bronx Community College - Campus Wide Utility Upgrade Phase IV **\$19,290,708.00**
Project Address

Owner: Bronx Community College

Address

Contact:

Construction Manager: N/A

Contact:

Architect: RCM Technologies

Contact: Bill White (516) 404-5517

Contract #: ES-GSN-0728
Stalco #: 1519

Award Date: January 2016
Completed: May 2019

SUNY Farmingdale - Whitman Hall Lower Level Renovations **\$2,376,217.00**

1316 Motor Parkway Islandia, NY 11749
Phone: (631) 254-6767 ~ Fax (631) 254-8015
estimating@stalcoconstruction.com

2350 Broadhollow Rd., Farmingdale, NY 11735			
Owner: SUNY Farmingdale		Contract #:	T000458
2350 Broadhollow Rd., Farmingdale, NY 11735		Stalco #:	1802
Contact: Erika Murray (631) 420-2017			
Construction Manager: N/A			
Contact:			
Architect: H2M		Award Date:	January 2018
Contact: Timothy Schultz (631) 756-8000		Completed:	November 2019
Farmingville Fire District - Station #2 Concrete Apron & Snow Melt System			\$376,717.71
1080 Portion Road, Farmingville, NY 11738			
Owner: Farmingdale Fire District		Contract #:	1
780 Horseblock Road, Farmingville, NY 11738		Stalco #:	1823
Contact:			
Construction Manager: N/A			
Contact:			
Architect: MJG Architecture		Award Date:	October 2018
Contact: Tom Zarcone (631) 849-5852		Completed:	June 2019
Great Neck Digester - Pre-Engineered Building			\$301,929.00
236 East Shore Road, Great Neck, NY 11023			
Great Neck Water Pollution Control District		Contract #:	18022-13120
6 H Enterprise Drive, East Setauket, NY 11733		Stalco #:	1822
Contact: John Martirano - WHM (631) 473-3568			
Construction Manager: N/A			
Contact:			
Architect: N/A		Award Date:	October 2018
Contact:		Completed:	April 2020
Middle Country CSD - Dawnwood Middle School Renovations Phase 2			\$2,483,009.11
10 43rd Street, Centereach, NY 11720			
Owner: Middle Country School District		Contract #:	58-02-11-06-0-008-023
8-43rd Street, Centereach, NY 11720		Stalco #:	1817
Contact:			
Construction Manager: Park East Construction			
Contact: Derrick Knatz 631-549-9800 dknatz@parkeastconstruct.com			
Architect: H2M		Award Date:	June 2018
Contact: Joseph Mile 631-756-8000 jmile@h2m.com		Completed:	May 2019
Connetquot CSD - 2018/2018 Capital Improvement Program at Connetquot HS			\$198,949.00
190 7th Street, Bohemia, NY 11716			
Owner: Connetquot CSD		Contract #:	58-05-07-06-0-007-037
780 Ocean Ave., Bohemia, NY 11716		Stalco #:	1820
Contact:			
Construction Manager: N/A			
Contact:			
Architect: JAG		Award Date:	September 2018
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com		Completed:	August 2019
Island Park UFSD - Localized Mitigation Improvements at Lincoln Orens MS			\$968,200.00
150 Trafalgar Blvd., Island Park, NY 1158			

Owner: Island Park UFSD
99 Radcliffe Road, Island Park, NY 11558
Contact: Marie Donnelly, Business Official
Construction Manager: N/A
Contact:

Contract #: 28-02-31-02-0-002-010
Stalco #: 1813

Architect: BBS Architects
Contact: Steve Walsh (631) 475-0349 swalsh@bbsarch.com

Award Date: March 2018
Completed: August 2019

Herricks UFSD - Cafeteria & Kitchen Renovations and New Comfort Station at Herricks' High School **\$2,557,811.00**
New Hyde Park, NY 11040

Herricks UFSD
999-B Herricks Rd., New Hyde Park, NY 11040
Contact: (516) 305-8903
Construction Manager: Park East Construction
Contact: (631) 549-9800

Contract #: SED 28-04-09-03-0-008-034,
28-04-09-03-7-018-001
Stalco #: 1814

Architect: BBS
Contact: (631) 475-0349

Award Date: April 2018
Completed: February 2019

Rocky Point UFSD - Bond Issue Related Capital Improvements at Various Schools **\$2,041,331.00**
Rocky Point, NY

Rocky Point UFSD
90 Rocky Point Rd., Rocky Point, NY 11778
Contact:
Construction Manager: N/A
Contact:

Contract #: SED 58-02-09-02-0-001-015,
58-02-09-02-0-005-034,
58-02-09-02-0-006-019
Stalco #: 1815

Architect: JAG
Contact: John Grillo (631) 476-2161

Award Date: May 2018
Completed: September 2018

Southold UFSD - Library & Computer Lab Renovations at Southold Elementary School **\$456,964.00**
Oaklawn Ave., Southold, NY 11971

Owner: Southold UFSD
420 Oaklawn Ave., Southold, NY 11971
Contact: (631) 765-5400
Construction Manager: School Construction Consultants
Contact:

Contract #: SED 58-10-05-02-0-014-005
Stalco #: 1816

Architect: BBS
Contact: (631) 475-0349

Award Date: June 2017
Completed: February 2018

SUNY Stony Brook - Keller College Stair Renovation **\$821,164.29**
Roosevelt Drive, Stony Brook, NY 11794

Owner: SUNY Stony Brook
1500 Stony Brook Road, Stony Brook, NY 11794
Contact: Marie Titone, Contract Officer (631) 632-6066
Construction Manager: N/A
Contact:

Contract #: 18/19-051MC
Stalco #: 1825

Architect: D&B
Contact: Chris Desmond (914) 467-5300 cdesmond@db-eng.com

Award Date: November 2018
Completed: September 2019

North Merrick UFSD - Capital Improvement Project Phase 1A at Various Schools **\$1,318,000.00**

1316 Motor Parkway Islandia, NY 11749
Phone: (631) 254-6767 ~ Fax (631) 254-8015
estimating@stalcoconstruction.com

Fayette Elementary School & Old Mill Elementary School - North Merrick, NY

Owner: North Merrick UFSD
 1057 Merrick Ave, North Merrick, NY 11566
 Contact:

Contract #: 28-02-29-02-0-001-027
 28-02-29-02-0-002-024
 Stalco #: 1706

Construction Manager: N/A
 Contact:

Architect: JAG
 Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com

Award Date: April 2017
 Completed: November 2018

MTA Long Island Railroad - New Wyandanch Station Building Construction**\$6,101,423.82**

Corner of Straight Path & Long Island Ave., Wyandanch, NY

Owner: MTA Long Island Railroad
 144-41 94th Ave., 3rd Floor, MC 0335, Jamaica, NY 11435
 Contact: Jigna Patel (347) 494-6112

Contract #: 6268
 Stalco #: 1717

Construction Manager: N/A
 Contact:

Architect: Keller Sandgren Associates
 Contact:

Award Date: October 2017
 Completed: June 2020

South Huntington Public Library - Interior Renovations**\$332,972.00**

145 Pidgeon Hill Rd, South Huntington, NY 11746

Owner: South Huntington Public Library
 145 Pidgeon Hill Rd, South Huntington, NY 11746
 Contact:

Contract #: 1
 Stalco #: 1720

Construction Manager: Park East Construction Corp.
 Contact: Kevin Castrova 516-644-1472 kcastrova@parkeastconstruction.com

Architect: Beatty Harvey Coco
 Contact: Christopher Sepp 631-300-1010 x127 christopher@bhc-architects.com

Award Date: December 2017
 Completed: November 2018

Bellmore UFSD - Reinhard Early Childhood Center - Alterations to Existing Buildings**\$765,000.00**

2750 South St. Marks Ave, Bellmore, NY 11710

Owner: Bellmore UFSD
 580 Winthrop Ave, Bellmore, NY 11710
 Contact:

Contract #: 28-02-07-02-0-003-021
 Stalco #: 1806

Construction Manager: Park East Construction Corp.
 Contact: Kevin Castrova 516-644-1472 kcastrova@parkeastconstruction.com

Architect: Wiedersum Associates
 Contact: 631-434-7900

Award Date: February 2018
 Completed: September 2018

Mastic Beach Ambulance Headquarters - New Construction**\$5,217,600.00**

343 Neighborhood Rd, Mastic Beach, NY

Owner: Town of Brookhaven
 One Independence Hill, Farmingville, NY 11738
 Contact: Geri Manzilillo 631-451-6252

Contract #: 20170059
 Stalco #: 1713

Construction Manager: L.K. McLean Associates, P.C.
 Contact: Chris Dwyer 631-286-8668 cdwyer@lkma.com

Architect: L.K. McLean Associates, P.C.
 Contact: Chris Dwyer 631-286-8668 cdwyer@lkma.com

Award Date: August 2017
 Completed: September 2018

Deer Park UFSD - 2015 Bond Issue Related Capital Improvement Program Phase 2 @ Various Schools		\$1,655,144.00
May Moore ES, John Q. Adams ES, Robert Frost MS - Deer Park, NY		
Owner: Deer Park UFSD	Contract #:	58-01-07-03-0-004-034 58-01-07-03-0-007-027 58-01-07-03-0-008-033
1881 Deer Park Ave, Deer Park, NY 11729	Stalco #:	1804
Contact:		
Construction Manager: SCC (School Construction Consultants)		
Contact: Steve Gianniotis 347-680-6879		
Architect: JAG	Award Date:	January 2018
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com	Completed:	September 2018
Rocky Point UFSD - Bond Issue Related Capital Improvement Program Phase 2 at Various Schools		\$904,796.00
Joseph A. Edgar Intermediate School, Rocky Point High School - Rocky Point, NY		
Owner: Rocky Point UFSD	Contract #:	58-02-09-02-0-001-014 58-02-09-02-0-005-032
90 Rocky Point - Yaphank Rd, Rocky Point, NY 11778	Stalco #:	1719
Contact:		
Construction Manager: Park East Construction Corp.		
Contact: Derrick Knatz 631-549-9800 dknatz@parkeastconstruct.com		
Architect: JAG	Award Date:	November 2017
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com	Completed:	September 2018
Middle Country CSD - Stagecoach Elementary School Interior & Exterior Renovations		\$350,000.00
205 Dare Rd, Selden, NY 11784		
Owner: Middle Country CSD	Contract #:	58-02-11-06-0-012-013
8 43rd St, Centereach, NY 11720	Stalco #:	1715
Contact:		
Construction Manager: Park East Construction		
Contact: Sean Corrigan 631-549-9800		
Architect: H2M	Award Date:	June 2017
Contact: Joseph Mile 631-756-8000	Completed:	September 2018
Wantagh UFSD - 2016/2017 Capital Improvement Program - Middle School Cafeteria		\$144,855.00
3299 Beltagh Ave., Wantagh, NY 11793		
Owner: Wantagh UFSD	Contract #:	28-02-23-03-0-006-023
3301 Beltagh Ave., Wantagh, NY 11793	Stalco #:	1808
Contact:		
Construction Manager: N/A		
Contact:		
Architect: JAG	Award Date:	February 2018
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com	Completed:	August 2018
Mattituck-Cutchogue UFSD - Pole Barn at Jr/Sr HS		\$117,787.00
15125 Main Road, Mattituck, NY 11952		
Owner: Mattituck-Cutchogue UFSD	Contract #:	58-10-12-02-0-021-001
385 Depot Lane, Cutchogue, NY 11935	Stalco #:	1807
Contact:		
Construction Manager: N/A		
Contact:		
Architect: JAG	Award Date:	February 2018
Contact: John Grillo 631-476-2161 jmgrillo@jagarchitect.com	Completed:	July 24, 2018

Stony Brook Radiology Exterior Stairwell Renovation		\$880,000.00
Stony Brook Medicine		
Owner: SUNY at Stony Brook	Contract #:	T20071
101 Nicholls Rd, Stony Brook, NY 11794	Stalco #:	1707
Contact: Ed Mercurio 631-444-6638		
Construction Manager: N/A		
Contact:		
Architect: Stantech	Award Date:	April 2017
Contact: 631-424-8600	Completed:	May 2018
Babylon UFSD - Kitchen & Service Line Reconstruction		\$438,700.00
50 Railroad Avenue, Babylon, NY 11702		
Owner: Babylon UFSD	Contract #:	58-01-01-03-0-001-020
50 Railroad Avenue, Babylon, NY 11702	Stalco #:	1704
Contact: Peter R. Daly 631-893-7914		
Construction Manager: School Construction Consultants		
Contact: Tony Campinella 631-848-0714		
Architect: BBS	Award Date:	March 2017
Contact: 631-475-0349	Completed:	October 2017
North Shore CSD - Bond Referendum Phase III		\$376,000.00
Sea Cliff ES/Glenwood Landing ES/North Shore HS/High School Maintenance Garage		
Owner: North Shore CSD	Contract #:	28-05-01-06-0-005-018 28-05-01-06-0-003-023 28-05-01-06-0-004-032 28-05-01-06-2-012-031
112 Franklin Avenue, Sea Cliff, New York 11579	Stalco #:	1703
Contact: John Hall 516-277-7800		
Construction Manager: Savin Engineer, P.C.		
Contact: Frank Szatkowski 914-769-3200		
Architect: BBS	Award Date:	March 2017
Contact: 631-475-0349	Completed:	October 2017
Southampton Elementary School - Kindergarten Bathroom Renovation		\$135,502.00
30 Pine St, Southampton, NY 11968		
Owner: Southampton UFSD	Contract #:	58-09-06-03-0-001-030
70 Leland Lane, Southampton, New York 11968	Stalco #:	1701
Contact: 631-591-4700		
Construction Manager: N/A		
Contact:		
Architect: BBS	Award Date:	March 2017
Contact: Jim Wegdig 631-475-0349	Completed:	October 2017
Southampton Intermediate School - Locker Room Renovation & Café Ceiling Replacement		\$695,194.00
70 Leland Lane, Southampton, NY 11968		
Owner: Southampton UFSD	Contract #:	58-09-06-03-0-003-024
70 Leland Lane, Southampton, New York 11968	Stalco #:	1702
Contact: 631-591-4700		
Construction Manager: N/A		
Contact:		
Architect: BBS	Award Date:	March 2017
Contact: Jim Wegdig 631-475-0349	Completed:	October 2017
BMCC - Pool Deck Restoration		\$5,397,000.00

199 Chambers Street, New York, New York 10007	
Owner: DASNY 1 Penn Plaza, New York, New York 10119-0098 Contact: Peter Jackson 212-273-5000 Construction Manager: N/A Contact: N/A Architect: N/A Contact: N/A	Contract #: 3128509999 Stalco #: 1507 Award Date: March 2015 Completed: October 2017
Massapequa UFSD - Berner Middle School Science Lab Upgrades & Masonry Restoration \$740,490.00	
4925 Merrick Road, Massapequa, NY 11758	
Owner: Massapequa UFSD 4925 Merrick Road, Massapequa, NY 11758 Contact: Construction Manager: School Construction Consultants, Inc. Contact: Mike Sweeney 631-495-5261 Architect: H2M Contact: 631-756-8000	Contract #: 28-05-23-03-0-011-028 Stalco #: 1711 Award Date: June 2017 Completed: September 2017
Roslyn UFSD - Bus Garage Demo \$32,438.00	
475 Round Hill Road, Roslyn Heights, NY	
Owner: Roslyn UFSD P.O. Box 367, Roslyn Heights, NY 11577 Contact: Kevin Carpenter 516-801-5450 kcarpenter@roslynschools.org Construction Manager: Contact: Architect: Kaeyer, Garment & Davidson Architects, PC Contact: Kevin Carpenter 516-801-5450	Contract #: 28-04-03-03-5-004-006 Stalco #: 1613 Award Date: July 2016 Completed: August 2017
SUNY Optometry - Lobby Renovation \$4,495,000.00	
33 West 42nd Street, New York, New York	
Owner: State University Construction Fund State University Plaza, 353 Broadway, Albany, New York 12246 Contact: Simon Stein 518-320-3230 Simon.Stein@suny.edu Construction Manager: Ellana Inc. Construction Consultants Contact: Steve Beriznitsky 347-371-2137 Architect: Kliment Halsband Architects Contact: Ms. Nathalie Westervelt 212-243-7400	Contract #: 41050 Stalco #: 1430 Award Date: January 2015 Completed: March 2017
SUNY at Stony Brook - Benedict Quad Renovations \$3,138,980.00	
Stony Brook, New York 11790	
Owner: State University of New York State University Plaza, Albany, New York 12246 Contact: Peter Gerace 631-632-4772 peter.gerace@stonybrook.edu Construction Manager: Contact: John Sparano 631-254-6767 Architect: WCF Architects Contact: Neil Macdonald 631-689-845	Contract #: T001961 Stalco #: 1608 Award Date: April 2016 Completed: January 2017
SUNY Stony Brook - Starbucks at Melville Library \$1,231,200.00	
100 Nicolls Road, Stony Brook, New York 11794	
Owner: State University of New York	Contract #: T001983

State University Plaza, Albany, New York 12246 800-342-3811
 Contact: SBU Alumni Association John Fogarty 631-632-3077 john.fogarty@stonybrook.edu
Construction Manager: Stony Brook Alumni Association
 Contact: John Fogarty 631-632-3077
Architect: iKon Architects
 Contact: Charlie Maira 609-919-0099

Stalco #: 1615
 Award Date: September 2016
 Completed: January 2017

Farmingdale State College - SUNY School of Business \$19,417,864.00

2350 Broad Hollow Rd, Farmingdale, NY
 Owner: **State University Construction Fund**
 State University Plaza, 353 Broadway, Albany, NY 12246
 Contact: 518-320-3200
 Construction Manager: N/A
 Contact:
 Architect: **Urbahn Architects**
 Contact: 212-239-0220

Contract #: T005998
 Stalco #: 1214
 Award Date: September 2014
 Completed: January 2017

Elmhurst New Branch Library \$23,288,312.00

86-01 Broadway, Elmhurst, NY
 Owner: **Queens Public Library**
 Customer Address: 89-11 Merrick Rd, Jamaica, NY 11432
 Contact Name / Number: Zia Dawood 917-346-8865
Construction Manager: DDC
 Contact: Mario Siriban 347-203-1255
Architect: Marpillero Pollak Architects
 Contact: Sandiz Marpillero 212-619-5560

Contract #: 20101421440
 Stalco #: 1011
 Award Date: May 2010
 Completed: December 2016

CA - Driven Local \$291,303.00

1 Computer Associates Plaza, Ste. #105, Islandia, NY 11749
 Owner: **CA Technologies**
 1 Computer Associates Plaza, Islandia, NY 11749
 Contact: Dave Mastrella 631-342-3563
Construction Manager: N/A
 Contact:
Architect: BLD
 Contact: (631) 580-2100

Contract #: 3000279523/1616
 Stalco #: 1614
 Award Date: July 2016
 Completed: November 2016

Bellmore-Merrick CSD - Bond Referendum Projects Phase III \$918,000.00

W.C. Mephram HS/S.H.Calhon HS/JFK HS/Grand Avenue MS/ Merrick Avenue MS
 Owner: **Bellmore - Merrick CSD**
 1260 Meadowbrook Road, North Merrick, New York 11566
 Contact: 516-992-1000
Construction Manager: School Construction Consultants
 Contact: 631-567-0200
Architect: BBS
 Contact: Roger Smith 631-475-0349

Contract #: 28-02-53-07-007-037
 Stalco #: 1602
 Award Date: January 2016
 Completed: September 2016

H.O. Penn - Holtsville Parts Department Renovation \$108,850.00

660 Union Avenue, Holtsville, New York 11742
 Owner: **H.O. Penn Machinery Co., Inc.**
 15 Middle Avenue, Holtsville, New York 11742

Contract #: W0000/ELIHV2TS527696-1
 Stalco #: 1606

Contact: Tristen Schaper 631-654-4454 tschaper@hopenn.com

Construction Manager: N/A

Contact: N/A

Architect: Roseberry Architectural Studio

Contact: 631-730-1262

Award Date: June 2016

Completed: September 2016

East Hampton UFSD - Capital Improvements \$518,972.00
John Marshal Elementary/ East Hampton MS/ East Hampton HS

Owner: Board of Education, East Hampton UFSD

East Hampton, New York 11749

Contact: 631-329-4100

Construction Manager: N/A

Contact: N/A

Architect: MJG Architecture

Contact: Mike Guido 631-849-5852

Contract #: 58-0301-02-0-004-018 58-0301-02-0-003-021 58-0301-02-0-006-027
Stalco #: 1605

Award Date: April 2016

Completed: August 2016

Freeport UFSD Auditorium Upgrade at FHS \$634,539.00
50 South Brookside Avenue, Freeport, New York 11520

Owner: Freeport UFSD

235 North Ocean Avenue, Freeport, New York 11520

Contact: Thomas Fucci

Construction Manager: N/A

Contact: N/A

Architect: BJLJ Engineers & Architects, P.C.

Contact: Thomas Fucci

Contract #: 28-02-09-3-0-001-030
Stalco #: 1512

Award Date: June 2016

Completed: August 2016

Mount Sinai Hospital - Parking Lot \$2,546,211.00
23-11 30th Road, Queens, New York

Owner: Mount Sinai Hospital

23-11 30th Road, Queens, New York

Contact: 718-932-1000

Construction Manager: Mount Sinai Medical Center

Contact: Jeremiah Laureano 646-5920816

Architect: Custodio Consulting LLC

Contact: 212-683-6170

Contract #: X772.20
Stalco #: 1411

Award Date: August 2014

Completed: August 2016

Oceanside UFSD - Capital Improvements Program - High School \$112,000.00
145 Merle Avenue, Oceanside, New York 11572

Owner: Oceanside UFSD

145 Merle Avenue, Oceanside, New York 11572

Contact: 516-678-1200

Construction Manager: N/A

Contact: N/A

Architect: JAG

Contact: John Grillo 631-476-2161

Contract #: 28-02-11-03-0-008-029
Stalco #: 1609

Award Date: May 2016

Completed: August 2016

Oysterponds Elementary School - Window Replacement Phase III \$535,000.00
23405 Main Rd, Orient, NY, 11957

Owner: Oysterpond Elementary School

23405 Main Rd, Orient, NY, 11957

Contract #: GC-1
Stalco #: 1610

Contact: 631-323-2410
Construction Manager: N/A
Contact: N/A

Architect: BHC, LLP
Contact: Richard Malone 631-323-2410

Award Date: June 2016
Completed: August 2016

Nassau University Medical Center - Primary Care \$3,064,000.00

2201 Hempstead Turnpike, East Meadow, New York 11564

Owner: Nassau University Medical Center
2201 Hempstead Turnpike, East Meadow, New York 11564
Contact: Fara Tabaei

Contract #: MC98-12173-5147
Stalco #: 1319

Construction Manager: SCC Construction Management Group
Contact: Nick Amoruso 516-790-0594

Architect: Fletcher Thompson
Contact: 212-695-4767

Award Date: January 2014
Completed: February 2016

Nassau BOCES - Rosemary Kennedy Center - Pool Area \$65,800.00

2850 North Jerusalem Road, Wauntagh, New York 11793

Owner: Nassau BOCES - Board of Cooperative Educational Services
71 Clinton Road, Garden City, New York
Contact: Christopher Graham

Contract #: 14/15-058
Stalco #: 1432

Construction Manager:
Contact:

Architect: H2M
Contact: Andrew Martin 631-756-8000 Ext. 1339

Award Date: 2014
Completed: November 2015

Pier A - Phase III Core & Shell General Contracting \$17,167,950.00

22 Battery Place, New York, NY 10004

Owner: Battery Park City Authority
200 Liberty St, 24th Floor, New York, NY 10281
Contact: Gwen Dawson 212-417-4304

Contract #: 10-2037
Stalco #: 1022

Construction Manager: The Liro Group
Contact: Jaio Maraj 212-248-0481 marajj@liro.com

Architect: H3 Hardy Collaboration Architecture
Contact: Ivy Zoretic 212-677-6030

Award Date: August 2010
Completed: December 2014

Battery Park Community Center \$10,816,859.00

345 Chambers St., Battery Park City

Owner: Battery Park City Authority
200 Liberty St, 24th Floor, New York, NY 10281
Contact: Gwen Dawson 212-417-4304

Contract #: 10-1996
Stalco #: 1003

Construction Manager: Liro Program & Construction Management, P.C.
Contact: Anthony Buquicchio 212-786-1090

Architect: Liro Architects
Contact: Anthony Buquicchio 212-786-1090

Award Date: April 2010
Completed: 2013

Erasmus Hall High School \$11,400,000.00

911 Flatbush Ave, Brooklyn, NY

Owner: NYC School Construction Authority
Address: 30-30 Thomson Ave, Long Island City, NY 11101
Contact Name / Number: Jacobie Ricard 718-472-8000

Contract #: C000010679
Stalco #: 0741

Construction Manager: NYC School Construction Authority

Contact: Jacobie Ricard 718-472-8000

Architect: BJLJ Engineers & Architects, P.C.

Contact: Jugal Pandya 516-741-2222

Award Date: January 2008

Completed: 2012

Manorhaven Beach Pool Complex \$12,176,251.00

Manorhaven Blvd, Port Washington, NY

Owner: Town of North Hempstead - Dept. of Public Works

285 Denton Ave, New Hyde Park, NY 11040

Contact: 516-739-6710

Contract #: 07-11R

Stalco #: 1018

Construction Manager: Cameron Engineering & Associates

Contact: Kevin McAndrew 516-827-4900

Architect: Notaro Grupp Architects

Contact: John Notaro, Scott Grupp 516-609-8700

Award Date: July 2010

Completed: December 2010

Three Village CSD - Bond Issue Related Capital Improvement Phase III \$30,000,000.00

Nassakeag ES, Arrowhead ES, Ward Melville HS

Owner: Three Village Central School District

100 Suffolk Ave, Stony Brook, NY 11790

Contact Name / Number: 631-730-4010

Construction Manager: School Construction Consultants

Contact: Paul Adamo 631-567-0200

Architect: John A. Grillo Architects

Contact: John M. Grillo 631-476-2161 jmgrillo@jagarchitect.com

58-02-01-06-0-002-022 58-02-01-

Contract #: 06-0-007-021 58-02-01-06-0-009

032

Stalco #: 903

Award Date: January 2009

Completed: September 2010

CA - Lewis Johs \$295,000

Baldassano Architecture

Alew Bakdamenti 631.830.0282

Completed in 2016

SUNY Farmingdale School of Business \$18,900,000

Urbahn Architects

Deborah Verne 212.239.0220

Completed in 2016

White Top Mountain Medical and Research Building \$5,000,000

NF Architectural Designs

516.627.3300

Completed in 2016

Brooklyn Bridge Park Management and Community Building \$3,600,000

Architecture Research Office

Megumi Tamanaha 212.675.1870

Completed in 2015

Liebeskind USA, Inc. \$350,000

L2 Studios, Inc.

Boyd Joyner 407.648.8888

Completed in 2015

Riverhead Charter School \$14,100,000

BBS Architects, Landscape Architects and Engineers

1316 Motor Parkway Islandia, NY 11749

Phone: (631) 254-6767 ~ Fax (631) 254-8015

estimating@stalcoconstruction.com

Karlisa Grundner 631.475.0349 Completed in 2015	
Catheterization Laboratory at Nassau University Medical Center	\$815,000
DiGroup Architecture Robert Ryan 646.584.8419 Completed in 2014	
Lincoln Medical and Mental Health Center Emergency Department	\$5,200,000
Perkins Eastman Architects Kenneth Easton 646.225.6227 Completed in 2014	
Long Beach High School	\$16,500,000
CS Arch Dana Hochberg 518.463.8068 Completed in 2014	
SUNY Stony Brook MRI Suite	\$5,800,000
Aecom Jongmin Lee 212.366.6200 Completed in 2014	
Vaughn College of Aeronautics and Technology	\$24,000,000
John Ciardullo Associates, P.C. Richard Piacentini 212.245.0010 Completed in 2014	
Health Sciences Library at Nassau University Medical Center	\$700,000
Ehasz Giacalone Architects Louis Giacalone 516.420.8383 Completed in 2013	
SUNY Optometry	\$1,858,780
Perkins Eastman Richard Rappaport 646.225.6275 Completed in 2013	
SUNY Stony Brook University Computing Center	\$2,500,000
Newport Engineering Samantha Spano 516.922.2672 Completed in 2013	
Computer Associates	\$592,000
BLD Architecture Tom Murzawski 631.580.2100 Completed in 2012 (We have done various projects at CA over the past few years)	
Deer Park Fire District	\$150,000
Cashin Associates Joe Iannucci 631.348.7600 Completed in 2012	
Manorhaven Beach Pool Complex	\$12,000,000
Cameron Engineering & Associates Joyce He 516.827.4900	

Completed in 2012

Miller Place Union Free School District

\$2,000,000

Michael J. Guido Architect
Mike Guido 631.617.1301
Completed in 2012

Patchogue - Medford Library

\$537,562

H2M Architects
Joseph Mile 631.694.4122
Completed in 2011

East Quogue Fire District

\$360,000

Frank G. Relf Architects
William Quintanilla 631.271.4432
Completed in 2009

Holy Sepluchre Cemetery Building

\$2,700,000

Burton, Behrendt, Smith Architecture
Karlisa Grundner 631.475.0349
Completed in 2009

Scully Estates Suffolk County Environmental Education & Interpretive Center

\$723,000

Peter Caradonna Architecture
Christine Caruso 631.689.1120
Completed in 2009

Western Suffolk BOCES

\$159,627

James M. Cambell Architects
Ralph Cassetta 631.587.1984
Completed in 2009

Springs Youth Center

\$1,300,000

L.K. McLean Associates, P.C.
Matthew Jedlicka 631.286.8668
Completed in 2008

Tanner Park Beach Complex

\$1,000,000

Sidney B. Bowne & Son, LLP
Joseph Todaro 516.746.2350
Completed in 2008

Kings Park High School

\$10,100,000

H2M Architects
Joseph Mile 631.694.4122
Completed in 2007

**NEW YORK STATE
VENDOR RESPONSIBILITY QUESTIONNAIRE
ATTACHMENT B - UNCOMPLETED CONSTRUCTION CONTRACTS**

Vendor Name: Stalco Construction, Inc.

As of 02/20/23

NYS Vendor ID: 1000038099

Question 3.1: List all current uncompleted construction contracts:

1.	Agency/Owner NYS Office of General Services - Sagamore Children's Psychiatric Ctr. Bldg. 80 Induction Units Replacement (2302)			Award Date 02/16/23	Completion Date
	Contact Person Catherine Skaczkowski		Telephone No. 518-474-5528	Designer Architect and/or Design Engineer NYS Office of General Services	
	Contract No. 47045C	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
			Total Contract Amount \$764,000.00	Amount Sublet to Others	Uncompleted Amount \$764,000.00
2.	Agency/Owner North Babylon UFSD - CIP Bond Phase 4 at N. Babylon High School & Robert Moses Middle School (2228)			Award Date 01/20/23	Completion Date
	Contact Person James Weydig		Telephone No. 631-475-0349	Designer Architect and/or Design Engineer BBS Architects & Engineers	
	Contract No. SED#: 58-01-03-03-0-002-045 SED#: 58-01-03-03-0-011-028	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
			Total Contract Amount \$1,494,951.00	Amount Sublet to Others	Uncompleted Amount \$1,494,951.00
3.	Agency/Owner SCWA - Furnish & Install Pre-Engineered Metal Warehouse (2227)			Award Date 01/03/23	Completion Date
	Contact Person Dane Jones		Telephone No. 631-563-0334	Designer Architect and/or Design Engineer SCWA	
	Contract No. 7904	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
			Total Contract Amount \$780,100.00	Amount Sublet to Others	Uncompleted Amount \$780,100.00
4.	Agency/Owner Inc. Village of Sands Point - Administration Building Renovations at Governors Lane (2226)			Award Date 12/28/22	Completion Date
	Contact Person Kurt Dirr		Telephone No. 516-364-9890 ext 3421	Designer Architect and/or Design Engineer D&B Engineers & Architects	
	Contract No. D&B No. 5696	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
			Total Contract Amount \$737,299.80	Amount Sublet to Others	Uncompleted Amount \$737,299.80

5.	Agency/Owner NYS OPRHP - Aquatics Locker Room Rehab at Denny Farrell Riverbank State Park (2225)				Award Date TBD		Completion Date	
	Contact Person Syed Shukat		Telephone No. 212-866-3554		Designer Architect and/or Design Engineer NYS OPRHP			
	Contract No. D006051	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$4,342,000.00		Amount Sublet to Others		Uncompleted Amount \$4,342,000.00
6.	Agency/Owner Town of Islip - Long Island MacArthur Airport - Main Terminal Building MEP Upgrades Phase II (2224)				Award Date 11/15/22		Completion Date	
	Contact Person Steven Siniski		Telephone No. 631-467-3300		Designer Architect and/or Design Engineer C & S Companies			
	Contract No. DAT 2022-007-GC	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$1,192,000.00		Amount Sublet to Others		Uncompleted Amount \$1,192,000.00
7.	Agency/Owner Pt. Washington Water District - 1,4 Dioxane, Nitrate, PFOA & PFOS Treatment at Stonytown Well 10 Station (2222)				Award Date 02/14/23		Completion Date	
	Contact Person Andrew Marrantino & Stephen Laun		Telephone No. 516-364-9890		Designer Architect and/or Design Engineer D & B Engineers & Architects			
	Contract No. 2022-05 GC	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$4,557,000.00		Amount Sublet to Others \$1,947,23.00 to date		Uncompleted Amount \$4,557,000.00
8.	Agency/Owner City of Glen Cove - construction of Municipal Golf Course Clubhouse (2221)				Award Date 10/26/22		Completion Date	
	Contact Person City of Glen Cove		Telephone No. 516-676-2000		Designer Architect and/or Design Engineer Cashin Associates PC			
	Contract No. 2022-017	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$792,000.00		Amount Sublet to Others \$497,205.00 to date		Uncompleted Amount \$714,084.50
9.	Agency/Owner Port Washington UFSD - Cafeteria Air Conditioning at South Salem Elementary School (2220)				Award Date 09/21/22		Completion Date	
	Contact Person Kathleen O'Hara		Telephone No. 516-767-5010		Designer Architect and/or Design Engineer BBS Architects & Engineers			
	Contract No. SED#: 28-04-04-03-0-008-011	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$76,000.00		Amount Sublet to Others		Uncompleted Amount \$72,960.00
10.	Agency/Owner				Award Date		Completion Date	

Longwood CSD - Air Conditioning & Electrical Upgrades at Various Buildings (2219)			10/31/22	
Contact Person Richard Wiedersum		Telephone No. 631-756-8000	Designer Architect and/or Design Engineer H2M Architects + Engineers	
Contract No. SED#: 58-02-12-06-0009-020; SED#: 58-02-12-06-0007-019; SED#: 58-02-12-06-0004-021	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$1,354,000.00	Amount Sublet to Others \$838,676.00 to date	Uncompleted Amount \$1,119,995.60
11. Agency/Owner Town of Islip - Byron Lake Pool Reconstruction (2218)			Award Date 09/13/22	Completion Date
Contact Person Town of Islip		Telephone No. 631-224-5411	Designer Architect and/or Design Engineer de Bruin Engineering	
Contract No. DPW3-22G	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$16,929,800.00	Amount Sublet to Others \$10,904,659.92 to date	Uncompleted Amount \$13,477,877.11
12. Agency/Owner Stony Brook Eastern Long Island Hospital - Pharmacy Relocation (2217)			Award Date 08/02/22	Completion Date
Contact Person John Pluchino		Telephone No. 631-632-6010	Designer Architect and/or Design Engineer H2M Architects + Engineers	
Contract No. 752943	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$960,000.00	Amount Sublet to Others	Uncompleted Amount \$960,000.00
13. Agency/Owner Gold Coast Public Library - New Library Building (2216)			Award Date 07/22/22	Completion Date
Contact Person Joseph Mottola		Telephone No. 631-756-8000 ext 1325	Designer Architect and/or Design Engineer H2M Architects + Engineers	
Contract No. H2M Project No GCLB-2101	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$8,086,000.00	Amount Sublet to Others \$4,316,773.54 to date	Uncompleted Amount \$7,767,000.00
15. Agency/Owner Harborfields CSD - Addition & Interior Alterations at Thomas J. Lahey Elementary School (2213)			Award Date 06/16/22	Completion Date
Contact Person George Leeman		Telephone No. 516-506-3353	Designer Architect and/or Design Engineer BBS Architects & Engineers	
Contract No. SED#: 58-04-06-06-0-011-017	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$1,987,000.00	Amount Sublet to Others \$1,879,454.91	Uncompleted Amount \$817,823.68

16.	Agency/Owner North Shore CSD - 2019 Capital Project Phase 2 Rebid - Contract GC-1 at High School (2207)				Award Date 04/08/22		Completion Date	
	Contact Person Rober Firneis		Telephone No. 631-780-7017		Designer Architect and/or Design Engineer MEMASI			
	Contract No. SED#: 28-05-01-06-0-004-039	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$6,278,000.00		Amount Sublet to Others \$4,915,296.20		Uncompleted Amount \$3,959,263.12
17.	Agency/Owner US Army Engineer District, Louisville - Fort Totten Army Reserve Center Restoration				Award Date 05/06/22		Completion Date	
	Contact Person - Prime Ameresco, Inc.		Telephone No. 508-661-2200		Designer Architect and/or Design Engineer US Army Corps of Engineers			
	Contract No. Project ID: 521282000	Prime or Sub Sub	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$10,272,581.18		Amount Sublet to Others \$7,527,327.65		Uncompleted Amount \$7,962,293.23
18.	Agency/Owner Jericho Water District - 1,4 Dioxane & PFOA Treatment at Kirby Lane - GC (2204)				Award Date 02/16/22		Completion Date	
	Contact Person Jennifer Gienau		Telephone No. 516-364-9890		Designer Architect and/or Design Engineer D&B Engineers & Architects			
	Contract No. C4-21	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$4,600,000.15		Amount Sublet to Others \$3,432,293.01 to date		Uncompleted Amount \$2,071,767.80
19.	Agency/Owner Suffolk County Water Authority - New Pre-Engineered Metal Building (2203)				Award Date 01/31/22		Completion Date	
	Contact Person SCWA		Telephone No. 631-563-0334		Designer Architect and/or Design Engineer SCWA			
	Contract No. 7819	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$898,050.00		Amount Sublet to Others \$684,523.64 to date		Uncompleted Amount \$662,118.72
20.	Agency/Owner NYC Parks & Recreation - St. Mary's Recreation Center Reconstruction (2202)				Award Date 02/07/22		Completion Date	
	Contact Person Lorenzo Calabrese		Telephone No. 718-760-6866		Designer Architect and/or Design Engineer Sage and Coombe Architects			
	Contract No. X045-115M	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$6,362,014.04		Amount Sublet to Others \$4,633,470.17 to date		Uncompleted Amount \$6,148,514.04
21.	Agency/Owner				Award Date		Completion Date	

	Carle Place UFSD - Exterior Wall & Classroom Renovation Phase 3 at Cherry Lane Elementary School (2201)			02/04/22	
Contact Person Jason Smith		Telephone No. 631-756-8000 ext 1011	Designer Architect and/or Design Engineer H2M Architects + Engineers		
Contract No. SED#: 28-04-11-03-0-003-024	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A	
		Total Contract Amount \$992,200.00	Amount Sublet to Others \$890,627.26	Uncompleted Amount \$54,850.00	
22.	Agency/Owner NYCDDC - Kings County Criminal Court Public Restroom Reno-Holding Pens ADA Upgrades Rebid (2128)			Award Date 12/13/21	Completion Date 730 ccds
Contact Person Travis Letbetter - Contract Mgr.		Telephone No. 718-391-1158	Designer Architect and/or Design Engineer NYC DDC		
Contract No. CO281TOIL	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A	
		Total Contract Amount \$9,385,100.00	Amount Sublet to Others \$6,178,841.43 to date	Uncompleted Amount \$8,275,064.48	
23.	Agency/Owner Town of Southampton - Volunteer Ambulance Facility (2127)			Award Date 11/15/21	Completion Date 335 ccds
Contact Person Thomas Houghton Jr. PE - Acting Town Engineer		Telephone No. 631-702-1750	Designer Architect and/or Design Engineer AVA Design		
Contract No. Construction Work	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A	
		Total Contract Amount \$3,448,830.00	Amount Sublet to Others \$2,685,309.79 to date	Uncompleted Amount \$2,252,765.60	
24.	Agency/Owner NYC DDC - Countee Cullen Library Exterior Rehabilitation Rebid (2126)			Award Date 11/16/21	Completion Date 720 ccds
Contact Person Travis Letbetter - Contract Mgr.		Telephone No. 718-391-1158	Designer Architect and/or Design Engineer NYC DDC		
Contract No. LNCAL15CC	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A	
		Total Contract Amount \$5,840,000.00	Amount Sublet to Others \$2,654,089.00	Uncompleted Amount \$5,840,000.00	
25.	Agency/Owner Suffolk County Community College - New Plant Operations Building on Michael J. Grant Campus (2124)			Award Date 09/08/21	Completion Date 01/01/23
Contact Person Chris McDonald		Telephone No. 631-847-7762	Designer Architect and/or Design Engineer Tetra Tech Architects & Engineers		
Contract No. 23-CC-153	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A	
		Total Contract Amount \$3,769,050.00	Amount Sublet to Others \$3,109,912.50	Uncompleted Amount \$2,190,868.83	
26.	Agency/Owner West Islip Fire District - New Vehicle Storage Building (2119)			Award Date 06/14/21	Completion Date 05/13/22

Contact Person Fire District	Telephone No. 631-669-1939	Designer Architect and/or Design Engineer		
Contract No. WE-16-009	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$2,118,900.00	Amount Sublet to Others \$1,727,971.67	Uncompleted Amount \$45,996.91
27.	Agency/Owner Uniondale UFSD - Walnut Elementary School Addition & Renovation (2115)			Award Date 06/23/21
			Completion Date 08/07/23	
Contact Person Jason Smith	Telephone No. 631-756-8000	Designer Architect and/or Design Engineer H2M Architects + Engineers		
Contract No. SED # 28-02-02-03-0-007-036	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A		EIN of JV, if applicable N/A
		Total Contract Amount \$5,876,000.00	Amount Sublet to Others \$5,001,773.57	Uncompleted Amount \$2,197,814.08

28.	Agency/Owner Inc. Village of Mineola - New Fire Headquarters (2112)				Award Date 05/11/21		Completion Date 07/25/22	
	Contact Person Patrick Stone		Telephone No. 631-756-8000		Designer Architect and/or Design Engineer H2M Architects + Engineers			
	Contract No. IVOM 1901	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$8,886,000.00		Amount Sublet to Others \$7,968,580.16		Uncompleted Amount \$1,295,132.54
29.	Agency/Owner North Shore School District - Addition & Interior/Exterior Renovation at Various Schools - Contract 1 (2104)				Award Date 03/26/21		Completion Date 08/19/22	
	Contact Person Savin Engineers PC		Telephone No. 914-490-0269		Designer Architect and/or Design Engineer MEMASI			
	Contract No. 103-2001 Contract 1	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$5,956,000.00		Amount Sublet to Others \$5,156,082.10		Uncompleted Amount \$4,747.80
30.	Agency/Owner East Hampton UFSD - New Bus Garage (2015)				Award Date 12/11/20		Completion Date 01/07/22	
	Contact Person Michael J. Guido		Telephone No. 631-849-5852		Designer Architect and/or Design Engineer MJG Architects			
	Contract No. SED # 58-03-01-02-5-034-001	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$2,671,100.00		Amount Sublet to Others \$2,026,657.79		Uncompleted Amount \$1,334,097.83
31.	Agency/Owner Massapequa Fire District - Addition & Renovation to Park House (2014)				Award Date 12/01/20		Completion Date 03/31/22	
	Contact Person Patrick Stone		Telephone No. 631-756-8000		Designer Architect and/or Design Engineer H2M Architects + Engineers			
	Contract No. MPFD1902	Prime or Sub Prime	Joint Venture (JV) Name, if applicable N/A				EIN of JV, if applicable N/A	
				Total Contract Amount \$7,081,000.00		Amount Sublet to Others \$5,386,903.63		Uncompleted Amount \$5,430,825.57

C. Pending contracts not yet started by the bidder

List all contracts awarded to or won by the bidder but not yet started.

Project & Location	Contract Type	Contract Amount (\$000)	Date Scheduled to Start	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. (if different from owner)

FORM OF BID BOND

KNOW ALL MEN BY THESE PRESENTS. That we, Stalco Construction, Inc.

hereinafter referred to as the "Principal", and Endurance Assurance Corporation

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of _____

Ten Percent of Proposal Price

(\$ 10% of P.P.), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for _____

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to the Principal the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of the time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the 28th day of May, 2024.

(Seal)

Starco Construction, Inc. (L.S.)
Principal

By: *Alan Nahmias* President

(Seal)

Endurance Assurance Corporation
Surety


By: *CR*
Colette R. Chisholm, Attorney-in-Fact

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Suffolk ss:
On this 28 day of May, 2024, before me personally came
Alan Nahmias to me known, who, being by me duly sworn, did

depose and say that he/she/they resides at
22 Beach Hill Dr Ft. Salonga NY 11768
that he/she/they is the President of
Stalco Construction Inc.

the corporation described in and which executed the foregoing instrument; that he/she/they knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he/she/they signed his name thereto by like order.

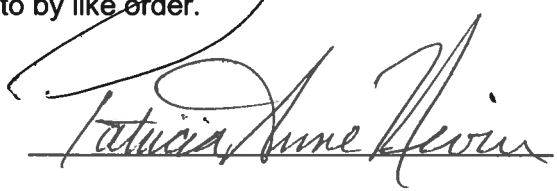

PATRICIA ANNE NEVIN
Notary Public - State of New York
No. 01NE6392027
Qualified in Suffolk County
My Commission Expires May 20, 2027
Notary Public

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:
On this _____ day of _____, _____, before me personally
appeared _____ to me known and known to me to be one of
the members of the firm of _____ described in and
who executed the foregoing instrument, and he/she/they acknowledged to me that he/she/they
executed the same as and for the act and deed of said firm.

Notary Public

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:
On this _____ day of _____, _____ before me personally
appeared _____ to me known and known to me to be the
person described in and who executed the foregoing instrument and acknowledged that
he/she/they executed the same.

Notary Public

AFFIX ACKNOWLEDGMENTS AND JUSTIFICATION OF SURETIES

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF New York }

COUNTY OF New York }

On this May 28, 2024, before me personally came Colette R. Chisholm to me known, who, being by me duly sworn, did depose and say; that he/she resides in New York County, State of New York that he/she is the Attorney-In-Fact of the Endurance Assurance Corporation the corporation described in which executed the above instrument; that he/she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that is was so affixed by the Board of Directors of said corporation; and that he/she signed his/her name thereto by like order; and the affiant did further depose and say that the Superintendent of Insurance of the State of New York, has pursuant to Section 1111 of the Insurance Law of the State of New York, issued to Endurance Assurance Corporation (Surety) his/her certificate of qualification evidencing the qualification of said Company and its sufficiency under any law of the State of New York as surety and guarantor, and the propriety of accepting and approving is as such; and that such certificate has not been revoked.

Fiona Walsh
Notary Public

NY acknowledgement

FIONA WALSH
Notary Public-State of New York
NO. 01WA0018088
Qualified in Nassau County
Commission Expires December 7, 2027

KNOW ALL BY THESE PRESENTS, that **Endurance Assurance Corporation, a Delaware corporation ('EAC'), Endurance American Insurance Company, a Delaware corporation ('EAIC'), Lexon Insurance Company, a Texas corporation ('LIC'), and/or Bond Safeguard Insurance Company, a South Dakota corporation ('BSIC'),** each, a "Company" and collectively, "**Sompo International,**" do hereby constitute and appoint: **Camille Maitland, Colette R. Chisholm, Dana Granice, Desiree Cardlin, George O. Brewster, Gerard S. Macholz, Karolynne Ramirez, Katherine Acosta, Lee Ferrucci, Michelle Wannamaker, Nelly Renchiwich, Robert T. Pearson, Susan Lupski, Thomas Bean, Vincent A. Walsh**

as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**

Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:

RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.

IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.

Endurance Assurance Corporation

Endurance American Insurance Company

Lexon Insurance Company

Bond Safeguard Insurance Company

Richard M Appel

Richard M Appel

Richard M Appel

Richard M Appel

By: **Richard Appel; SVP & Senior Counsel**

By: **Richard Appel; SVP & Senior Counsel**

By: **Richard Appel; SVP & Senior Counsel**

By: **Richard Appel; SVP & Senior Counsel**



ACKNOWLEDGEMENT

On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/she is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.

Amy Taylor

By: **Amy Taylor, Notary Public – My Commission Expires 3/9/27**



CERTIFICATE

I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:

1. That the original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
2. The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified:
"RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: **RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO,** and be it further
RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
3. The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this 28th day of May, 2024

By: **Daniel S. Lude, Secretary**

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.**

The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website – <https://www.treasury.gov/resource-center/sanctions/SDN-List>.

In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com

Telephone: 615-553-9500 Mailing Address: Sompo International; 12890 Lebanon Road; Mount Juliet, TN 37122-2870

ENDURANCE ASSURANCE CORPORATION
Balance Sheet - Statutory - Basis
December 31, 2023

Assets:	
Bonds	\$ 8,840,516.134
Preferred stocks	14,559,098
Common stocks	2,502,912.644
Cash, cash equivalents, and short-term investments	547,214.855
Other invested assets	367,228.494
Receivables for securities	12,539,247
Total cash and invested assets	<u>12,284,970,472</u>
Agents' balances or uncollected premiums	3,639,295.463
Reinsurance recoverable on loss and loss adjustment expense payments	866,922.861
Funds held by or deposited with reinsured companies	116,173.785
Investment income due and accrued	59,715.007
Current federal and foreign income tax recoverable and interest thereon	765,086
Net deferred tax asset	194,151.100
Receivables from parent, subsidiaries and affiliates	36,069.122
Other assets	240,998.501
Total admitted assets	<u>\$ 17,439,061,397</u>
Liabilities:	
Loss and loss adjustment expenses	\$ 6,724,893.327
Reinsurance payable on paid loss and loss adjustment expenses	823,698.569
Commissions payable, contingent commissions and other similar charges	(1,662.639)
Other expenses	28,177.519
Taxes, licenses and fees (excluding federal and foreign income taxes)	27,009,410
Unearned premiums	2,749,272.278
Advanced Premium	10,285.830
Ceded reinsurance premiums payable	1,277,805.256
Funds held by company under reinsurance treaties	75,781.757
Amounts withheld or retained by company for account of others	732,081.177
Remittances and items not allocated	248,815,866
Provision for reinsurance	58,958,628
Payable to parent, subsidiaries and affiliates	172,805.784
Payable for securities	50,301.420
Other liabilities	70,939.621
Total liabilities	<u>13,049,163,803</u>
Capital and surplus:	
Common capital stock	5,000,000
Surplus notes	200,000,000
Gross paid in and contributed surplus	3,480,137,280
Unassigned funds (surplus)	703,291,886
Aggregate write-ins for special surplus funds	1,468,428
Total capital and surplus	<u>4,389,897,594</u>
Total liabilities and capital and surplus	<u>\$ 17,439,061,397</u>

I, Hana Entela, Treasurer of Endurance Assurance Corporation (the "Company") do hereby certify that to the best of my knowledge and belief, the foregoing is a full and true Statutory Statement of Admitted Assets, Liabilities, Capital and Surplus of the Company as of December 31, 2023 prepared in conformity with accounting practices prescribed or permitted by the State of Delaware Department of Insurance. The foregoing statement should not be taken as a complete statement of financial condition of the Company. Such a statement is available upon request at the Company's office located at 4 Manhattanville Road, Purchase, NY 10577.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of the Company at Purchase, New York.

Hana Entela

Subscribed and sworn to before me this 5th day of March, 2024

Fiona McNamara



CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Equip.\$:
		DIVISION 01 - GENERAL REQUIREMENTS											
						General Requirements: (for details see tab "HardCostGeneralRequirements" at Division 1 General Requirements sheet)	1.00	JOB					\$ 2,311,493.28
						SUB TOTAL							\$ 2,311,493.28
		DIVISION 02 - EXISTING CONDITIONS											
			02 41 19	Selective Demolition									\$ -
						Public Restrooms:							\$ -
						Remove plumbing fixture	129.00	EA		\$ 5,450.00			\$ 5,450.00
						Remove partition incl finishes, toilet partitions	1,056.00	LF		\$ 5,250.00			\$ 5,250.00
						Remove door and frame, toilet partition door	80.00	EA		\$ 5,800.00			\$ 5,800.00
						Remove floor finishes and base	3,738.00	SF		\$ 9,200.00			\$ 9,200.00
						Remove ceiling finishes	3,738.00	SF		\$ 7,323.00			\$ 7,323.00
						Remove wall finishes at partitions to remain	4,553.00	SF		\$ 8,065.00			\$ 8,065.00
						Remove toilet, shower accessories	14.00	EA		\$ 700.00			\$ 700.00
						Misc. Demolition, removals/carting and clean-up	4,431.00	SF		\$ 5,862.00			\$ 5,862.00
						Holding Pens:							\$ -
						Remove plumbing fixture	9.00	EA		\$ 450.00			\$ 450.00
						Remove partition incl finishes	82.00	LF		\$ 2,100.00			\$ 2,100.00
						Remove door and frame	5.00	EA		\$ 500.00			\$ 500.00
						Remove floor finishes and base	565.00	SF		\$ 2,825.00			\$ 2,825.00
						Remove ceiling finishes	565.00	SF		\$ 2,542.00			\$ 2,542.00
						Remove wall finishes at partitions to remain	799.00	SF		\$ 450.00			\$ 450.00
						Remove bench	19.00	LF		\$ 850.00			\$ 850.00
						Remove toilet, shower accessories	3.00	EA		\$ 150.00			\$ 150.00
						Misc. Demolition, removals/carting and clean-up	565.00	SF		\$ 1,695.00			\$ 1,695.00
						Drinking Fountains:							\$ -
						Remove existing drinking fountain access panels and surrounding wall finishes	28.00	EA		\$ 2,800.00			\$ 2,800.00
						Core drilling for new plumbing fixture location							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Equip.\$:
						Public Restrooms:							\$ -
						Core drilling for new plumbing fixture location	7.00	EA			\$ 3,500.00	\$ 1,000.00	\$ 4,500.00
						Miscellaneous floor patching, filling of holes, etc.	4,431.00	SF	\$ 500.00	\$ 5,293.00			\$ 5,793.00
						Provide channel in slab for channel floor drain	120.00	LF		\$ 3,150.00	\$ 1,000.00		\$ 4,150.00
						Holding Pens:							\$ -
						Core drilling for new plumbing fixture location	7.00	EA			\$ 3,500.00	\$ 1,000.00	\$ 4,500.00
						Miscellaneous floor patching, filling of holes, etc.	565.00	SF	\$ 350.00	\$ 1,695.00			\$ 2,045.00
			02 82 13 Asbestos Abatement										\$ -
						Hazardous material abatement - Per DDC PM	1.00	JOB	\$ 17,499.00	\$ 148,741.50	\$ 8,749.50		\$ 174,990.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 18,349.00	\$ 227,891.50	\$ 11,749.50	\$ 257,990.00
			DIVISION 04 - MASONRY										
			04 20 00 Unit Masonry										\$ -
						Holding Pens:							\$ -
						Reinforced cmu partition	924.00	SF	\$ 4,851.00	\$ 27,489.00	\$ 1,167.00		\$ 33,507.00
						Patch existing partitions to remain	799.00	SF	\$ 2,631.45	\$ 14,034.40	\$ 877.15		\$ 17,543.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 7,482.45	\$ 41,523.40	\$ 2,044.15	\$ 51,050.00
			DIVISION 05 - METALS										
			05 50 00 Metal Fabrications										\$ -
						Public Restrooms:							\$ -
						Additional 2x2 steel stubbing at glass at corridors, Back foil print glass w/ cont. coated metal frame	1.00	JOB	\$ 11,200.00	\$ 9,450.00			\$ 20,650.00
						Miscellaneous metals and steel supports	4,431.00	SF	\$ 7,500.00				\$ 7,500.00
						Holding Pens:							\$ -
						Miscellaneous metals and steel supports	565.00	SF	\$ 8,800.00				\$ 8,800.00
			05 70 00 Decorative Metal										\$ -
						Public Restrooms:							\$ -
						1/2" Continuous Stl Angle /Metal Frame, per 8/A-501	197.00	LF	\$ 3,900.00	\$ 4,000.00			\$ 7,900.00
						M-2, Rib 2 Wall Panel (MirroFlex)	34.00	SF	\$ 28,500.00	\$ 17,400.00			\$ 45,900.00
						M-5, Vertical Fluted Metal Panel w/ Corner Trim above GL-1	80.00	SF	\$ 22,600.00	\$ 11,000.00			\$ 33,600.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Holding Pens:							\$ -
						Metal ceiling at holding pen	355.00	SF		\$ 12,500.00	\$ 37,250.00		\$ 49,750.00
						Drinking Fountains:							\$ -
						Powder coated metal frame around tile	154.00	SF		\$ 2,310.00	\$ 5,390.00		\$ 7,700.00
						M-1, Engraved metal signage, as per 3/A-500	14.00	EA		\$ 2,000.00	\$ 2,500.00		\$ 4,500.00
copy above cell and insert copied cell above the row													
SUB TOTAL										\$ 99,310.00	\$ 86,990.00		\$ 186,300.00
DIVISION 06 - WOOD, PLASTICS, COMPOSITES													
			06 10 00			Rough Carpentry							\$ -
						Public Restrooms:							\$ -
						General carpentry and rough blocking	4,431.00	SF		\$ 5,000.00	\$ 3,000.00		\$ 8,000.00
						Temporary protection and dust control, partitions, doors, floor mats, etc. <i>with general conditions</i>	14.00	EA					\$ -
						Holding Pens:							\$ -
						General carpentry and rough blocking	565.00	SF		\$ 600.00	\$ 2,000.00		\$ 2,600.00
						Temporary protection and dust control, partitions, doors, floor mats, etc. <i>with general conditions</i>	3.00	EA					\$ -
						Drinking Fountains:							\$ -
						General carpentry and rough blocking	14.00	EA		\$ 1,000.00	\$ 800.00		\$ 1,800.00
			06 61 16			Solid Surfacing Fabrications							\$ -
						Public Restrooms:							\$ -
						Solid surface radiator cover, incl. custom printed tiles, as per 1/A-522	42.00	LF		\$ 6,300	\$ 11,250	\$ 2,500	\$ 20,050.00
						Solid surface countertops, S-2	135.00	LF		\$ 25,475	\$ 40,725		\$ 66,200.00
			06 64 00			Plastic Paneling							\$ -
						Public Restrooms:							\$ -
						Floating Wall Shelf, per 4/A-502	111.00	LF		\$ 2,775.00	\$ 3,200.00		\$ 5,975.00
						Holding Pens:							\$ -
						Drinking Fountains:							\$ -
copy above cell and insert copied cell above the row													
SUB TOTAL										\$ 41,150.00	\$ 60,975.00	\$ 2,500.00	\$ 104,625.00
DIVISION 07 - THERMAL AND MOISTURE PROTECTION													
			07 84 00			Firestopping							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material, Labor & Equip. \$:
						Public Restrooms:							\$ -
						Firestopping	4,431.00	SF		\$ 10,250.00	\$ 22,155.00		\$ 32,405.00
						Holding Pens:							\$ -
						Firestopping	565.00	SF		\$ 2,825.00	\$ 5,650.00		\$ 8,475.00
						Drinking Fountains:							\$ -
						Firestopping	14.00	EA		\$ 159.60	\$ 372.40		\$ 532.00
			07 92 00 Joint Sealants										\$ -
						Public Restrooms:							\$ -
						Caulking and sealants	4,431.00	SF		\$ 3,190.32	\$ 7,577.01		\$ 10,767.33
						Holding Pens:							\$ -
						Caulking and sealants	565.00	SF		\$ 406.80	\$ 966.15		\$ 1,372.95
						Drinking Fountains:							\$ -
						Caulking and sealants	14.00	EA		\$ 10.08	\$ 23.94		\$ 34.02
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 16,841.80	\$ 36,744.50		\$ 53,586.30
			DIVISION 08 - OPENINGS										
			08 11 13 Hollow Metal Doors and Frames										\$ -
						Public Restrooms (Rabbit door jamb, typ.):							\$ -
						Type A: Single swing door, frame, and hardware, solid surface door cladding w/ Hwd #1	14.00	EA		\$ 19,110.00	\$ 25,000.00		\$ 44,110.00
						Type B: Single swing door, frame, and hardware, solid surface door cladding w/ Hwd #2	9.00	EA		\$ 15,070.00	\$ 14,000.00		\$ 29,070.00
						Type C: Single door, frame, and hardware, solid surface door cladding w/ Hwd #3	6.00	EA		\$ 10,936.00	\$ 9,000.00		\$ 19,936.00
						Type D: Double swing door, frame, and hardware, solid surface door cladding w/ Hwd #4	6.00	PR		\$ 1,390.00	\$ 18,000.00		\$ 19,390.00
						Holding Pens:							\$ -
						Type B: Single swing door, frame, and hardware, solid surface door cladding w/ Hwd #2	2.00	EA		\$ 3,348.00	\$ 4,000.00		\$ 7,348.00
						Type C: Single door, frame, and hardware, solid surface door cladding w/ Hwd #3	2.00	EA		\$ 3,646.00	\$ 4,000.00		\$ 7,646.00
						Drinking Fountains:							\$ -
						Access Doors							\$ -
						Public Restrooms:							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eqp.\$:
						Access door	14.00	EA		\$ 700.00	\$ 2,800.00		\$ 3,500.00
						Holding Pens:							\$ -
						Access door/sleeve for plumbing fixture	3.00	EA		\$ 150.00	\$ 600.00		\$ 750.00
						Drinking Fountains:							\$ -
						Access door/sleeve for plumbing fixture	14.00	EA		\$ 700.00	\$ 2,800.00		\$ 3,500.00
			08 34 53 Security Doors and Frames										\$ -
						Public Restrooms:							\$ -
						Holding Pens:							\$ -
						Steel holding pen bars/ w post anchored to the ceiling	108.00	SF		\$ 26,300.00	\$ 11,630.00		\$ 37,930.00
						Detention security glass, 3/4" thk laminated polycarbonate, GL-4	245.00	SF		\$ 20,200.00	\$ 9,000.00		\$ 29,200.00
						Type E: Single holding pen door and hardware, holding pen bars, security detention glass	3.00	EA		\$ 4,905.00	\$ 6,000.00		\$ 10,905.00
			08 81 26 Interior Glass Glazing										\$ -
						Public Restrooms:							\$ -
						GL-1: Printed Aluminum Graphic Panel - Vibrachrome w/ cont. coated metal frame	591.00	SF		\$ 32,000.00	\$ 20,665.21		\$ 52,665.21
						Light shelf, 1/2" laminated glass w/ translucent film, 6'-0"W, as per 2/A-502	11.00	EA		\$ 10,500.00	\$ 15,000.00		\$ 25,500.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 148,955.00	\$ 142,495.21		\$ 291,450.21
			DIVISION 09 - FINISHES										
			09 21 16 Gypsum Board Assemblies										\$ -
						Public Restrooms:							\$ -
						Partitions:							\$ -
						Type 1: 3-5/8 metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ batt insulation	5,049.00	SF		\$ 49,000.00	\$ 90,000.00		\$ 139,000.00
						Type 2: 2-1/2" metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ batt insulation	2,538.00	SF		\$ 26,000.00	\$ 57,300.00		\$ 83,300.00
						Type 7: Plumbing partition: 6" metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ acoustical batt ins.	1,701.00	SF		\$ 24,000.00	\$ 40,000.00		\$ 64,000.00
						Type 4 Chase partition: 3-5/8" metal studs 20"GA at 16 OC, (1) layer of cement board on one side w/ batt insulation	3,848.00	SF		\$ 34,000.00	\$ 80,000.00		\$ 114,000.00
						Type 5 Furring wall: 7/8" metal stud furring channels, 20"GA at 16 OC, (1) layer of cement board on one side w/ batt insulation	4,509.00	SF		\$ 42,000.00	\$ 90,160.00		\$ 132,160.00
						Patch existing partitions to remain	4,186.00	SF		\$ 38,000.00	\$ 83,000.00		\$ 121,000.00
						Holding Pens:							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Partitions:							\$ -
						Type 1: 3-5/8 metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ batt insulation	96.00	SF		\$ 1,000.00	\$ 2,500.00		\$ 3,500.00
						Type 2: 2-1/2" metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ batt insulation	120.00	SF		\$ 1,200.00	\$ 3,000.00		\$ 4,200.00
						Type 5 Furring wall: 7/8" metal stud furring channels, 20"GA at 16 OC, (1) layer of cement board on one side w/ batt insulation	1,068.00	SF		\$ 7,500.00	\$ 18,800.00		\$ 26,300.00
						Type 7: Plumbing partition: 6" metal studs 20"GA at 16 OC, (1) layer of cement board on each side w/ acoustical batt ins.	120.00	SF		\$ 1,200.00	\$ 3,000.00		\$ 4,200.00
						Drinking Fountains:							\$ -
						Type 8 Chase Partition: 2" metal studs 20"GA at 16 OC, (1)-layer of Gypsum linear panels, (2)-layer of 5/8" cement board on one side + batt insulation	567.00	SF		\$ 4,500.00	\$ 11,336.00		\$ 15,836.00
						Surrounding wall repairs	14.00	EA		\$ 3,500.00	\$ 6,500.00		\$ 10,000.00
			09 30 00 Tiling										\$ -
						Public Restrooms:							\$ -
						Porcelain wall tile, T-2, T-3	9,125.00	SF		\$ 264,625.00	\$ 227,668.75		\$ 492,293.75
						Printed wall tile, T-4,T-5	2,324.00	SF		\$ 267,260.00	\$ 57,983.80		\$ 325,243.80
						Holding Pens:							\$ -
						T-3; Porcelain tile flooring at bathroom & jan closet	158.00	SF		\$ 4,582.00	\$ 3,942.10		\$ 8,524.10
						Tile walls at bathroom	720.00	SF		\$ 20,880.00	\$ 17,964.00		\$ 38,844.00
						Tile walls at jan closet, T-5	360.00	SF		\$ 10,440.00	\$ 8,982.00		\$ 19,422.00
						Wall finish at corridors	270.00	SF		\$ 7,830.00	\$ 6,728.40		\$ 14,558.40
						Wall tile at holding pens, structural glazed tiles, T-8	547.00	SF		\$ 14,358.75	\$ 24,614.00	\$ 2,051.25	\$ 41,024.00
						Premium for grout at T-8 tile, G-1, G-2	547.00	SF		\$ 5,470.00	\$ 2,735.00	\$ 273.50	\$ 8,478.50
						Drinking Fountains:							\$ -
						Porcelain wall tile, T-2, T-3	172.00	SF		\$ 4,988.00	\$ 4,291.40		\$ 9,279.40
						Provide new stone to match existing at hallway	91.00	SF		\$ 4,550.00	\$ 2,270.45		\$ 6,820.45
						Membrane Waterproofing							\$ -
						Public Restrooms:							\$ -
						Waterproofing behind wall tile, as per specifications	15,484.00	SF		\$ 34,347.00	\$ 22,413.30		\$ 56,760.30
						Holding Pens:							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Waterproofing behind wall tile, as per specifications	1,897.00	SF		\$ 5,691.00	\$ 3,699.15		\$ 9,390.15
						Drinking Fountains:							\$ -
						Waterproofing behind wall tile, as per specifications	154.00	SF		\$ 340.00	\$ 300.00		\$ 640.00
			09 57 53 Security Ceiling Assemblies										\$ -
						Public Restrooms:							\$ -
						Ceiling:							\$ -
						Gyp bd ceiling	3,548.00	SF		\$ 50,000.00	\$ 70,250.00		\$ 120,250.00
						Gyp bd fascia / soffits	56.00	LF		\$ 6,000.00	\$ 8,000.00		\$ 14,000.00
						Gyp light cove	412.00	LF		\$ 12,000.00	\$ 15,000.00		\$ 27,000.00
						Miscellaneous ceiling detailing	4,431.00	SF		\$ 25,000.00	\$ 40,000.00		\$ 65,000.00
						Ceiling repairs on floor below	100.00	SF		\$ 4,500.00	\$ 5,000.00		\$ 9,500.00
						Holding Pens:							\$ -
						Ceiling:							\$ -
						Gyp Bd Ceiling at Jan. Closet, Closet, and single toilet (outside of Holding Pen) - for Holding Pen Ceiling see Div. 05 70 00 Above	219.00	SF		\$ 6,000.00	\$ 6,000.00		\$ 12,000.00
			09 66 23 Resinous Matrix Terrazzo Flooring										\$ -
						Public Restrooms:							\$ -
						T-1; Terrazzo flooring at bathrooms, jan closets and corridor (incl. leveling screed + wp)	3,548.00	SF		\$ 90,343.97	\$ 67,757.98	\$ 3,226.57	\$ 161,328.52
						T-1; Terrazzo base, +/-1'-6" high	1,501.00	LF		\$ 30,260.16	\$ 22,695.12	\$ 1,080.72	\$ 54,036.00
						M-2, Metal strip at Transition Floor Line	191.00	LF		\$ 5,348.00	\$ 4,011.00	\$ 191.00	\$ 9,550.00
						Holding Pens:							\$ -
						T-1; Terrazzo flooring at holding pens (incl. leveling screed + wp)	355.00	SF		\$ 8,650.59	\$ 6,487.94	\$ 308.95	\$ 15,447.48
						T-1; Terrazzo base at holding pens, +/-1'-6" high	83.00	LF		\$ 1,673.28	\$ 1,254.96	\$ 59.76	\$ 2,988.00
						M-2, Metal strip at Transition Floor Line	33.00	LF		\$ 924.00	\$ 693.00	\$ 33.00	\$ 1,650.00
						Drinking Fountains:							\$ -
			09 90 00 Painting and Coating										\$ -
						Public Restrooms:							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material, Labor & Equip. \$:
						Paint gyp bd ceiling	3,548.00	SF		\$ 700.00	\$ 6,300.00		\$ 7,000.00
						Paint gyp bd fascia / soffits, light coves	468.00	LF		\$ 341.00	\$ 3,072.00		\$ 3,413.00
						Miscellaneous painting, patching at corridors, ceilings below, etc.	4,431.00	SF		\$ 800.00	\$ 7,200.00		\$ 8,000.00
						Paint storage rm. walls	256.00	SF		\$ 110.00	\$ 990.00		\$ 1,100.00
						Paint gyp bd ceiling at Jan. closet, storage and single toilet rm	219.00	SF		\$ 118.00	\$ 1,069.00		\$ 1,187.00
						Miscellaneous painting, patching at corridors, etc.	565.00	SF		\$ 180.00	\$ 1,620.00		\$ 1,800.00
copy above cell and insert copied cell above the row													
						SUB TOTAL				\$ 1,120,210.75	\$ 1,136,589.35	\$ 7,224.75	\$ 2,264,024.85
DIVISION 10 - SPECIALTIES													
			10 21 13 Toilet Compartments										\$ -
						Public Restrooms:							\$ -
						Toilet partition, Solid surface	28.00	EA		\$ 65,000.00	\$ 25,481.00		\$ 90,481.00
						Toilet ADA partition	14.00	EA		\$ 35,000.00	\$ 25,200.00		\$ 60,200.00
						Urinal screen	7.00	EA		\$ 4,964.00	\$ 3,500.00		\$ 8,464.00
						Holding Pens:							\$ -
						Drinking Fountains:							\$ -
			10 28 13 Toilet Accessories										\$ -
						Public Restrooms:							\$ -
						Changing table, recessed horizontal 37"W x 23"H x 4"D	12.00	EA		\$ 36,205.00	\$ 2,500.00		\$ 38,705.00
						Hallway bench, Brass, as per 2/A-500 + A-501	14.00	EA		\$ 60,500.00	\$ 80,000.00		\$ 140,500.00
						ADA 42" Grab bar	22.00	EA		\$ 1,027.00	\$ 3,000.00		\$ 4,027.00
						ADA 36" Grab bar	21.00	EA		\$ 931.00	\$ 3,000.00		\$ 3,931.00
						ADA 18" Grab bar	8.00	EA		\$ 867.00	\$ 1,000.00		\$ 1,867.00
						Soap dispenser wall mounted	43.00	EA		\$ 29,990.00	\$ 3,500.00		\$ 33,490.00
						GL-2: Mirror, 1/4" polished ss mirror on plywood backing	506.00	SF		\$ 1,500.00	\$ 5,000.00		\$ 6,500.00
						Shelves with mop holders in JC	6.00	EA		\$ 1,000.00	\$ 1,500.00		\$ 2,500.00
						Trash receptacles	24.00	EA		\$ 2,683.00	\$ 3,000.00		\$ 5,683.00
						Custom shelves in each closet/storage space, SS	22.00	EA		\$ 7,700.00	\$ 8,000.00		\$ 15,700.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						M-2, Toilet RM Signage	11.00	EA		\$ 24,800.00	\$ 37,200.00		\$ 62,000.00
						E22: Coat Hooks	48.00	EA		\$ 903.00	\$ 4,000.00		\$ 4,903.00
						E23: Toilet Stall Accs, Double Sided	11.00	EA		\$ 1,709.00			\$ 1,709.00
						E24: Toilet Stall Accs, Recessed	9.00	EA		\$ 1,689.00			\$ 1,689.00
						E25: Toilet Stall Accs, Surface Mtd	2.00	EA		\$ 265.00			\$ 265.00
						E26: Partition Door Wall Stop	12.00	EA		\$ 98.00	\$ 2,000.00		\$ 2,098.00
						Holding Pens:							\$ -
						Drinking Fountains:							\$ -
						Security Toilet Accessories							\$ -
						Public Restrooms:							\$ -
						Holding Pens:							\$ -
						Holding pen toilet partition	1.00	EA		\$ 5,000.00	\$ 4,000.00		\$ 9,000.00
						Custom, Holding pen toilet partition w/ integrated bench	2.00	EA		\$ 4,200.00	\$ 2,500.00		\$ 6,700.00
						Mirror - Polished stainless steel	42.00	SF		\$ 2,200.00	\$ 3,000.00		\$ 5,200.00
						ADA 42" Grab bar	6.00	EA		\$ 120.00	\$ 1,000.00		\$ 1,120.00
						ADA SS bench wall-mounted, holding pen 7'-2"W, as per 7/A-552	1.00	EA		\$ 6,500.00	\$ 18,000.00		\$ 24,500.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 294,851.00	\$ 236,381.00		\$ 531,232.00
						DIVISION 22 - PLUMBING							
						22 05 13 Common Motor Requirements for Plumbing Equipment							\$ -
						Public Restrooms							\$ -
						Remove water closet with related piping	53.00	EA		\$ 2,000.00	\$ 6,000.00		\$ 8,000.00
						Remove urinal with related piping	27.00	EA		\$ 1,000.00	\$ 4,000.00		\$ 5,000.00
						Remove lavatory with related piping	31.00	EA		\$ 1,000.00	\$ 5,000.00		\$ 6,000.00
						Remove floor drain	18.00	EA		\$ 500.00	\$ 2,500.00		\$ 3,000.00
						Cut and cap pipe	60.00	EA		\$ 1,500.00	\$ 7,000.00		\$ 8,500.00
						Carting and disposal	1.00	JOB			\$ 12,000.00		\$ 12,000.00
						Premium time for tie-in's	1.00	JOB					\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Material distribution (plumbing fixtures and pipe)	1.00	JOB			\$ 5,000.00		\$ 5,000.00
						Cutting, patching and fire stopping	1.00	JOB	\$	3,000.00	\$ 500.00		\$ 3,500.00
						System validate / Certification	1.00	JOB			\$ 3,000.00		\$ 3,000.00
						Disinfection	1.00	JOB			\$ 4,000.00		\$ 4,000.00
						Clean, flush and test	1.00	JOB			\$ 5,000.00		\$ 5,000.00
						Coordination with other trades	1.00	JOB			\$ 3,000.00		\$ 3,000.00
						Holding Cells							\$ -
						Remove lavatory / water closet with related piping	1.00	EA	\$	50.00	\$ 200.00		\$ 250.00
						Remove water closet with related piping	2.00	EA	\$	100.00			\$ 100.00
						Remove lavatory with related piping	3.00	EA	\$	150.00			\$ 150.00
						Remove mop sink with related piping	1.00	EA	\$	100.00			\$ 100.00
						Remove floor drain	2.00	EA	\$	50.00			\$ 50.00
						Cut and cap pipe	12.00	EA	\$	300.00			\$ 300.00
						Carting and disposal	1.00	JOB			\$ 3,000.00		\$ 3,000.00
						Premium time for tie-in's	1.00	JOB					\$ -
						Material distribution (plumbing fixtures and pipe)	1.00	JOB			\$ 500.00		\$ 500.00
						Cutting, patching and fire stopping	1.00	JOB	\$	100.00	\$ 500.00		\$ 600.00
						System validate / Certification	1.00	JOB			\$ 500.00		\$ 500.00
						Disinfection	1.00	JOB			\$ 1,000.00		\$ 1,000.00
						Clean, flush and test	1.00	JOB			\$ 1,000.00		\$ 1,000.00
						Coordination with other trades	1.00	JOB			\$ 1,000.00		\$ 1,000.00
						Drinking Fountain							\$ -
						Remove existing drinking fountain	10.00	EA	\$	250.00	\$ 2,500.00		\$ 2,750.00
						Remove existing 2" dia pipe (risers)	900.00	LF					\$ -
						Cut and cap pipe	12.00	EA	\$	500.00	\$ 1,500.00		\$ 2,000.00
						Carting and disposal	1.00	JOB			\$ 5,500.00		\$ 5,500.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Premium time for tie-in's	1.00	JOB					\$ -
						Material distribution (plumbing fixtures and pipe)	1.00	JOB			\$ 2,500.00		\$ 2,500.00
						Core drill, cutting, patching and fire stopping	1.00	JOB		\$ 500.00	\$ 10,000.00		\$ 10,500.00
						System validate / Certification	1.00	JOB			\$ 1,000.00		\$ 1,000.00
						Disinfection	1.00	JOB			\$ 2,000.00		\$ 2,000.00
						Clean, flush and test	1.00	JOB			\$ 1,000.00		\$ 1,000.00
						Coordination with other trades	1.00	JOB			\$ 1,000.00		\$ 1,000.00
			22 05 16	Expansion Fittings and Loops for Plumbing Piping									\$ -
						w/Piping							\$ -
			22 05 17	Sleeves and Sleeve Seals for Plumbing Piping									\$ -
						Drinking Fountain	1.00	JOB		\$ 500.00	\$ 2,000.00		\$ 2,500.00
			22 05 18	Escutcheons for Plumbing Piping									\$ -
						Public Restrooms	1.00	JOB		\$ 1,000.00	\$ 2,000.00		\$ 3,000.00
						Holding Cells	1.00	JOB		\$ 100.00	\$ 1,000.00		\$ 1,100.00
						Drinking Fountain	1.00	JOB		\$ 500.00	\$ 2,000.00		\$ 2,500.00
			22 05 23	General Duty Valves for Plumbing Piping									\$ -
						Public Restrooms							\$ -
						Valves	1.00	JOB		\$ 3,000.00	\$ 3,000.00		\$ 6,000.00
						Electronic trap primer	2.00	EA		\$ 2,500.00	\$ 1,500.00		\$ 4,000.00
						Holding Cells							\$ -
						Valves	1.00	JOB		\$ 500.00	\$ 1,000.00		\$ 1,500.00
						Electronic trap primer	1.00	EA		\$ 1,250.00	\$ 750.00		\$ 2,000.00
						Drinking Fountain							\$ -
						Valves	1.00	JOB		\$ 1,000.00	\$ 2,500.00		\$ 3,500.00
			22 05 29	Hangers and Support for Plumbing Piping and Equipment									\$ -
						Public Restrooms							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eqp.\$:
						Wall carrier @ plumbing fixtures	88.00	EA		\$ 23,000.00			\$ 23,000.00
						Hangers and support @ piping	1.00	JOB		\$ 1,000.00	\$ 3,000.00		\$ 4,000.00
						Holding Cells							\$ -
						Wall carrier @ Water closet	1.00	EA		\$ 500.00	\$ 1,000.00		\$ 1,500.00
						Wall carrier @ Lavatory	1.00	EA		\$ 500.00	\$ 1,000.00		\$ 1,500.00
						Hangers and supports @ Piping	1.00	JOB		\$ 500.00	\$ 1,500.00		\$ 2,000.00
						Drinking Fountain							\$ -
						Wall carrier @ Drinking fountain	28.00	EA		\$ 5,000.00			\$ 5,000.00
						Hangers and supports @ Piping	1.00	JOB		\$ 1,000.00	\$ 3,000.00		\$ 4,000.00
			22 05 53	Identification for Plumbing Piping and Equipment									\$ -
						Public Restrooms							\$ -
						System ID/Valve tags	1.00	JOB		\$ 800.00	\$ 1,500.00		\$ 2,300.00
						Holding Cells							\$ -
						System ID/Valve tags	1.00	JOB		\$ 100.00	\$ 500.00		\$ 600.00
						Drinking Fountain							\$ -
						System ID/Valve tags	1.00	JOB		\$ 250.00	\$ 1,000.00		\$ 1,250.00
			22 07 19	Plumbing Piping Insulation									\$ -
						Public Restrooms							\$ -
						Domestic water piping insulation	4,060.00	LF		\$ 10,000.00	\$ 20,000.00		\$ 30,000.00
						Holding Cells							\$ -
						Domestic water piping insulation	400.00	LF		\$ 1,500.00	\$ 3,300.00		\$ 4,800.00
						Drinking Fountain							\$ -
						Domestic water piping insulation	300.00	LF		\$ 1,250.00	\$ 2,300.00		\$ 3,550.00
			22 11 16	Domestic Water Piping									\$ -
						Public Restrooms							\$ -
						2-1/2" dia pipe (Copper-L) / fittings / supports	60.00	LF		\$ 2,800.00	\$ 6,000.00		\$ 8,800.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material, Labor & Equip. \$:
						2" dia pipe (Copper-L) / fittings / supports	140.00	LF		\$ 4,500.00	\$ 9,000.00		\$ 13,500.00
						1-1/4" - 1-1/2" dia pipe (Copper-L) / fittings / supports	1,220.00	LF		\$ 20,000.00	\$ 60,000.00		\$ 80,000.00
						1/2" - 3/4" dia pipe (Copper-L) / fittings / supports	2,640.00	LF		\$ 17,000.00	\$ 115,000.00		\$ 132,000.00
						Tie-in to existing domestic water system	42.00	EA		\$ 3,150.00	\$ 8,000.00		\$ 11,150.00
						Holding Cells							\$ -
						1-1/4" - 1-1/2" dia pipe (Copper-L) / fittings / supports	100.00	LF		\$ 1,475.00	\$ 5,500.00		\$ 6,975.00
						1/2" - 3/4" dia pipe (Copper-L) / fittings / supports	300.00	LF		\$ 2,000.00	\$ 11,000.00		\$ 13,000.00
						Tie-in to existing domestic water system	6.00	EA		\$ 450.00	\$ 2,500.00		\$ 2,950.00
						Drinking Fountain							\$ -
						1-1/2" dia pipe (Copper-L) / fittings / supports	300.00	LF		\$ 5,500.00	\$ 14,000.00		\$ 19,500.00
						Tie-in to existing domestic water system	4.00	EA		\$ 300.00	\$ 1,500.00		\$ 1,800.00
			22 11 19 Domestic Water Piping Specialties										\$ -
						Public Restrooms							\$ -
						Domestic water piping specialties	1.00	JOB		\$ 5,000.00	\$ 10,000.00		\$ 15,000.00
						Holding Cells							\$ -
						Domestic water piping specialties	1.00	JOB		\$ 1,000.00	\$ 3,000.00		\$ 4,000.00
						Drinking Fountain							\$ -
						Domestic water piping specialties	1.00	JOB		\$ 500.00	\$ 1,000.00		\$ 1,500.00
			22 13 16 Sanitary Waste and Vent Piping										\$ -
						Public Restrooms							\$ -
						4" dia pipe (Cast iron, no hub) / fittings / supports	1,200.00	LF		\$ 31,500.00	\$ 90,000.00		\$ 121,500.00
						3" dia pipe (Cast iron, no hub) / fittings / supports	80.00	LF		\$ 2,000.00	\$ 5,600.00		\$ 7,600.00
						1-1/2" - 2" dia pipe (Cast iron, no hub) / fittings / supports	3,640.00	LF		\$ 50,000.00	\$ 180,000.00		\$ 230,000.00
						Tie-in to existing sanitary waste and vent system	31.00	EA		\$ 1,550.00	\$ 12,500.00		\$ 14,050.00
						Painting pipe	4,920.00	LF		\$ 10,332.00	\$ 24,108.00		\$ 34,440.00
						4" clean out (tee and plug)	62.00	EA		\$ 1,550.00	\$ 8,000.00		\$ 9,550.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						2" clean out (tee and plug)	23.00	EA		\$ 600.00	\$ 2,000.00		\$ 2,600.00
						96" linear floor drain	6.00	EA		\$ 15,000.00	\$ 5,000.00		\$ 20,000.00
						60" linear floor drain	8.00	EA		\$ 17,500.00	\$ 7,000.00		\$ 24,500.00
						24" linear floor drain	16.00	EA		\$ 17,000.00	\$ 15,000.00		\$ 32,000.00
						Floor drain 3" dia	7.00	EA		\$ 1,750.00	\$ 5,000.00		\$ 6,750.00
						Holding Cells							\$ -
						4" dia pipe (Cast iron, no hub) / fittings / supports	50.00	LF		\$ 2,000.00	\$ 4,000.00		\$ 6,000.00
						3" dia pipe (Cast iron, no hub) / fittings / supports	70.00	LF		\$ 1,750.00	\$ 5,000.00		\$ 6,750.00
						1-1/2" - 2" dia pipe	320.00	LF		\$ 6,000.00	\$ 19,000.00		\$ 25,000.00
						Tie-in to existing sanitary waste and vent system	6.00	EA		\$ 500.00	\$ 2,500.00		\$ 3,000.00
						Painting pipe	440.00	LF		\$ 924.00	\$ 2,156.00		\$ 3,080.00
						4" clean out (tee and plug)	5.00	EA		\$ 150.00	\$ 1,000.00		\$ 1,150.00
						3" clean out (tee and plug)	1.00	EA		\$ 50.00	\$ 200.00		\$ 250.00
						Floor drain 3" dia	7.00	EA		\$ 1,800.00	\$ 5,600.00		\$ 7,400.00
						Drinking Fountain							\$ -
						2" dia pipe (Cast iron, no hub) / fittings / supports	600.00	LF		\$ 10,000.00	\$ 31,350.00		\$ 41,350.00
						Tie-in to existing sanitary waste and vent system	8.00	EA		\$ 500.00	\$ 3,200.00		\$ 3,700.00
						Painting pipe	600.00	LF	ACRE	\$ 1,260.00	\$ 2,940.00		\$ 4,200.00
			22 42 13.13 Commercial Water Closets										\$ -
						Public Restrooms							\$ -
						Water closet - wall hung	51.00	EA		\$ 76,500.00			\$ 76,500.00
			22 01 00 Operation and Maintenance of Plumbing			Fixture rough-in	65.00	EA		\$ 28,000.00	\$ 60,000.00		\$ 88,000.00
						Holding Cells							\$ -
						Lavatory / Water closet	3.00	EA		\$ 25,000.00			\$ 25,000.00
						Water closet - wall hung	1.00	EA		\$ 1,500.00			\$ 1,500.00
						Fixture rough-in	4.00	EA		\$ 2,000.00	\$ 4,000.00		\$ 6,000.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Urinal - wall hung	14.00	EA		\$ 21,000.00			\$ 21,000.00
			22 42 16.13 Commercial Lavatories										\$ -
						Public Restrooms							\$ -
						(1) Dyson wash and dry sink basin- wall hung (P15)	9.00	EA		\$ 31,500.00			\$ 31,500.00
						(2) Dyson wash and dry sink basin- wall hung (P15)	8.00	EA		\$ 28,000.00			\$ 28,000.00
						(3) Dyson wash and dry sink basin- wall hung (P15)	6.00	EA		\$ 21,000.00			\$ 21,000.00
						Fixture rough-in	43.00	EA		\$ 16,500.00	\$ 33,000.00		\$ 49,500.00
						Holding Cells							\$ -
						Lavatory - wall hung	1.00	EA		\$ 2,500.00	\$ 1,000.00		\$ 3,500.00
						Fixture rough-in	1.00	EA		\$ 2,500.00	\$ 1,000.00		\$ 3,500.00
			22 42 16.16 Commercial Sinks										\$ -
						Public Restrooms							\$ -
						Mop sink	7.00	EA		\$ 2,500.00			\$ 2,500.00
						Corner mop sink	1.00	EA		\$ 1,550.00			\$ 1,550.00
						Fixture rough-in	8.00	EA		\$ 4,000.00	\$ 5,000.00		\$ 9,000.00
						Holding Cells							\$ -
						Mop sink	2.00	EA		\$ 700.00			\$ 700.00
						Fixture rough-in	2.00	EA		\$ 1,000.00	\$ 1,800.00		\$ 2,800.00
			22 47 13 Drinking Fountains										\$ -
						Drinking Fountain							\$ -
						Drinking fountain (incl. water filter)	28.00	EA		\$ 65,000.00			\$ 65,000.00
						Fixture rough-in	28.00	EA		\$ 10,000.00	\$ 18,000.00		\$ 28,000.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 644,991.00	\$ 947,004.00		\$ 1,591,995.00
			DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)										
			23 05 00 Common Work Results for HVAC										\$ -
						Public Restrooms							\$ -
						Remove existing grille	43.00	EA		\$ 150.00	\$ 2,112.66	\$ 150.00	\$ 2,412.66

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Remove existing ductwork	730.00	LB		\$ 150.00	\$ 37,450.00	\$ 350.00	\$ 37,950.00
						Disconnect and cap duct	38.00	EA		\$ 150.00	\$ 3,659.40	\$ 250.00	\$ 4,059.40
						Carting and disposal	1.00	JOB					\$ -
						Cutting, patching, fire stopping	1.00	JOB		\$ 650.00	\$ 26,000.00	\$ 26,000.00	\$ 52,650.00
						Material distribution	1.00	JOB					\$ -
						Coordination with other trades	1.00	JOB		\$ 250.00	\$ 23,000.00	\$ 6,500.00	\$ 29,750.00
						Holding Cells							\$ -
						Remove existing grille	3.00	EA		\$ 150.00	\$ 195.00	\$ 35.00	\$ 380.00
						Remove existing ductwork	20.00	LB		\$ 150.00	\$ 1,300.00	\$ 25.00	\$ 1,475.00
						Disconnect and cap duct	3.00	EA		\$ 250.00	\$ 3,659.40	\$ 250.00	\$ 4,159.40
						Carting and disposal	1.00	JOB			\$ 2,500.00		\$ 2,500.00
						Cutting, patching, fire stopping	1.00	JOB			\$ 4,250.00		\$ 4,250.00
						Material distribution	1.00	JOB		\$ 150.00	\$ 2,500.00	\$ 250.00	\$ 2,900.00
						Coordination with other trades	1.00	JOB		\$ 150.00	\$ 4,500.00	\$ 250.00	\$ 4,900.00
						System start-up/commissioning, Assist	40.00	HR		\$ 100.00	\$ 4,847.00	\$ 250.00	\$ 5,197.00
			23 05 93 Testing, Adjusting, Balancing										\$ -
						Public Restrooms							\$ -
						Test and balance	1.00	JOB		\$ 150.00	\$ 16,780.00	\$ 100.00	\$ 17,030.00
						Holding Cells							\$ -
						Test and balance	1.00	JOB		\$ 100.00	\$ 6,500.00	\$ 100.00	\$ 6,700.00
			23 31 13 Metal Ducts										\$ -
						Public Restrooms							\$ -
						Galvanized steel ductwork	1,460.00	LB		\$ 78,908.40	\$ 180,000.00	\$ 17,000.00	\$ 275,908.40
						Tie-in duct	37.00	EA		\$ 1,405.00	\$ 3,745.17	\$ 350.00	\$ 5,500.17
						Holding Cells							\$ -
						Galvanized steel ductwork	90.00	LB		\$ 45,000.00	\$ 74,000.00	\$ 3,500.00	\$ 122,500.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Tie-in duct	5.00	EA			\$ 6,250.00		\$ 6,250.00
			23 33 10 Dampers										\$ -
						Public Restrooms							\$ -
						Volume damper	47.00	EA		\$ 1,175.00	\$ 4,513.41	\$ 200.00	\$ 5,888.41
						Holding Cells							\$ -
						Volume damper	6.00	EA		\$ 150.00	\$ 576.18	\$ 200.00	\$ 926.18
			23 37 13 Diffusers, Registers and Grilles										\$ -
						Public Restrooms							\$ -
						Air device	6.00	EA		\$ 270.00	\$ 576.00	\$ 200.00	\$ 1,046.00
						Linear diffuser	41.00	EA		\$ 1,500.00	\$ 3,841.20	\$ 200.00	\$ 5,541.20
						Holding Cells							\$ -
						Grille (Heavy duty steel grille with fixed louver)	6.00	EA		\$ 350.00	\$ 576.18	\$ 200.00	\$ 1,126.18
						Add Alternate							\$ -
						Public Restrooms							\$ -
						Provide Danfoss valve for radiator	9.00	EA		\$ 4,500.00	\$ 67,500.00	\$ 3,500.00	\$ 75,500.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 135,808.40	\$ 480,831.60	\$ 59,860.00	\$ 676,500.00
			DIVISION 26 - ELECTRICAL										
			26 05 10 Basic Electrical Materials and Methods										\$ -
						Public Restrooms							\$ -
						Trace existing circuits	1.00	JOB			\$ 3,752.00		\$ 3,752.00
						Shutdown/switchover	1.00	JOB			\$ 1,876.00		\$ 1,876.00
						Modification of existing panels	1.00	JOB			\$ 3,572.00		\$ 3,572.00
						Vibration isolation/seismic restraint	1.00	JOB			\$ 4,250.00		\$ 4,250.00
						Cutting/patching	1.00	JOB			\$ 28,000.00		\$ 28,000.00
						Miscellaneous electrical work, coordination w/other trades, deliveries	1.00	JOB			\$ 9,388.00		\$ 9,388.00
						Disconnect and make safe	1.00	JOB			\$ 3,572.00		\$ 3,572.00
						Holding Cells							\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eqp.\$:
						Cutting/patching	1.00	JOB			\$ 6,000.00		\$ 6,000.00
						Miscellaneous electrical work, coordination w/other trades, deliveries	1.00	JOB			\$ 3,500.00		\$ 3,500.00
			26 05 19 Low Voltage Electrical Power Conductors and Cables										\$ -
						Public Restrooms							\$ -
						# 12 wire	28,605.00	LF		\$ 6,500.00	\$ 18,250.00		\$ 24,750.00
						Cable cat.5e	440.00	LF		\$ 220.00	\$ 1,876.00		\$ 2,096.00
						Holding Cells							\$ -
						# 12 wire	270.00	LF		\$ 65.00	\$ 300.00		\$ 365.00
						Cable cat.5e	40.00	LF		\$ 40.00	\$ 78.00		\$ 118.00
						Drinking Fountains							\$ -
						# 12 wire	4,320.00	LF		\$ 1,253.00	\$ 8,450.00		\$ 9,703.00
			26 05 26 Grounding and Bonding							\$ 500.00	\$ 19,270.00		\$ 19,770.00
						Grounding and Bonding - w/trades							\$ -
			26 05 29 Hangers and Supports for Electrical Systems										\$ -
						Hangers and supports	1.00	JOB		\$ 2,000.00	\$ 20,225.00		\$ 22,225.00
			26 05 33 Raceway and Boxes										\$ -
						Public Restrooms							\$ -
						3/4" conduit (extend existing)	2,575.00	LF		\$ 4,532.00	\$ 3,105.00		\$ 7,637.00
						3/4" conduit	6,960.00	LF		\$ 12,250.00	\$ 8,442.00		\$ 20,692.00
						Holding Cells							\$ -
						3/4" conduit (extend existing)	90.00	LF		\$ 158.00	\$ 134.00		\$ 292.00
						Drinking Fountains							\$ -
						3/4" conduit	1,440.00	LF		\$ 2,534.00	\$ 1,742.00		\$ 4,276.00
			26 05 44 Sleeve and Sleeve Seals for Electrical raceways and Cabling										\$ -
						w/Raceways							\$ -
			26 05 53 Identification for Electrical System										\$ -

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material, Labor & Equip. \$:
						ID/labeling	1.00	JOB		\$ 150.00	\$ 2,018.00		\$ 2,168.00
			26 09 23 Lighting Control Devices										\$ -
						Public Restrooms							\$ -
						Single pole light switch	1.00	EA		\$ 85.00	\$ 201.00		\$ 286.00
						Low voltage switch	12.00	EA		\$ 1,020.00	\$ 2,412.00		\$ 3,432.00
						Occupancy sensor, wall mounted	28.00	EA		\$ 4,200.00	\$ 5,628.00		\$ 9,828.00
						Occupancy sensor, ceiling mounted	7.00	EA		\$ 1,400.00	\$ 2,500.00		\$ 3,900.00
						Vacancy sensor, wall mounted	5.00	EA		\$ 1,000.00	\$ 1,500.00		\$ 2,500.00
						Daylight sensor, ceiling mounted	4.00	EA		\$ 1,000.00	\$ 1,250.00		\$ 2,250.00
						Holding Cells							\$ -
						Single pole light switch	1.00	EA		\$ 175.00	\$ 134.00		\$ 309.00
						Occupancy sensor, wall mounted	1.00	EA		\$ 200.00	\$ 134.00		\$ 334.00
						Vacancy sensor, wall mounted	3.00	EA		\$ 315.00	\$ 735.00		\$ 1,050.00
			26 27 26 Wiring Devices										\$ -
						Public Restrooms							\$ -
						Duplex receptacle	29.00	EA		\$ 12,325.00	\$ 7,500.00		\$ 19,825.00
						GFI duplex receptacle	36.00	EA		\$ 3,600.00	\$ 10,854.00		\$ 14,454.00
						Power to devices (F.B.O.)				\$ 500.00			\$ 500.00
						Soap dispenser	27.00	EA		\$ 6,075.00	\$ 7,234.00		\$ 13,309.00
						Plumbing electronic faucet	60.00	EA		\$ 13,500.00	\$ 22,000.00		\$ 35,500.00
						Reconnect new receptacle to existing circuit	65.00	EA		\$ 6,500.00	\$ 20,920.00		\$ 27,420.00
						Drinking Fountains							\$ -
						GFI duplex receptacle	18.00	EA		\$ 3,600.00	\$ 7,500.00		\$ 11,100.00
			26 51 19 Interior Lighting										\$ -
						Public Restrooms							\$ -
						Lighting fixture type "L2"	584.00	LF		\$ 14,600.00	\$ 49,650.00		\$ 64,250.00

CONTRACTOR'S DETAILED BID BREAKDOWN FORM

Project ID: CO283TOIL

Project Name: (GC Large PQL): Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

Name of the Bidder: Stalco Construction, Inc.

Hard Cost Estimate (Level 2)

No.	Sub Work (*)	CSI Division:	CSI Sub Division:	RSMeans 12-digit item code:	Vendor Quote (Yes/ No)	Description:	Qty	Unit:		Total Cost of Material \$:	Total Cost of Labor \$:	Total Cost of Equipment \$:	Grand total of Material,Labor & Eq.\$:
						Lighting fixture type "L3"	22.00	LF		\$ 330.00	\$ 1,500.00		\$ 1,830.00
						Lighting fixture type "CL1"	6.00	EA		\$ 450.00	\$ 2,412.00		\$ 2,862.00
						Lighting fixture type "R2"	210.00	EA		\$ 4,200.00	\$ 52,500.00		\$ 56,700.00
						Reconnect new lighting fixture to existing circuit	367.00	EA		\$ 1,835.00	\$ 49,178.00		\$ 51,013.00
						Holding Cells							\$ -
						Lighting fixture type "CL1"	4.00	EA		\$ 30.00	\$ 536.00		\$ 566.00
						Lighting fixture type "CL2"	3.00	EA		\$ 30.00	\$ 310.00		\$ 340.00
						Lighting fixture type "CL2",em	6.00	EA		\$ 60.00	\$ 440.00		\$ 500.00
						Reconnect new lighting fixture to existing circuit	13.00	EA		\$ -	\$ 950.00		\$ 950.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 107,232.00	\$ 395,778.00		\$ 503,010.00
			DIVISION 28 - ELECTRONIC SAFETY AND SECURITY										
			28 46 13			Fire Alarm System							\$ -
						Strobe light	22.00	EA		\$ 120.00	\$ 5,260.00		\$ 5,380.00
						Combination speaker/strobe	10.00	EA		\$ 100.00	\$ 2,070.00		\$ 2,170.00
						Remove/reinstall existing strobe light	5.00	EA		\$ 50.00	\$ 670.00		\$ 720.00
						Disconnect/reconnect existing circuits	5.00	EA		\$ 75.00	\$ 670.00		\$ 745.00
						3/4" conduit	1,600.00	LF		\$ 2,816.00	\$ 27,500.00		\$ 30,316.00
						# 12 wire	4,200.00	LF		\$ 937.00	\$ 4,580.00		\$ 5,517.00
						Tie-in to existing system/reprogramming/testing/fees	37.00	HR			\$ 4,958.00		\$ 4,958.00
						copy above cell and insert copied cell above the row							
						SUB TOTAL				\$ 4,098.00	\$ 45,708.00		\$ 49,806.00
						Hard Cost:				\$ 2,639,279.40	\$ 3,838,911.56	\$ 83,378.40	\$ 6,561,569.36
						Hard Cost Summary(Including General Requirement):							\$ 8,873,062.64

Note:

1. Bidders' total material, labor, and equipment costs are fully-loaded with markups
2. Quantity includes expected material wastage
3. (*) Identify possible Sub Contract Work items
4. Shaded cell is where data must be entered



Department of
Design and
Construction

PROJECT ID: CO283TOIL

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 2 OF 3

**PROJECT LABOR AGREEMENT
INFORMATION FOR BIDDERS
CONTRACT
PERFORMANCE AND PAYMENT BONDS
SCHEDULE OF PREVAILING WAGES
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR THE PROJECT

**Manhattan Criminal Court Public
Restrooms Renovation and Holding
Cells Accessibility Upgrade**

LOCATION:
BOROUGH:
CITY OF NEW YORK

**100 Centre Street
Manhattan, NY 10013**

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

DCAS

Circular

Date: February 28, 2024



NOTICE TO BIDDERS

This contract is subject to a new 2020 Project Labor Agreement

This contract is subject to the attached Project Labor Agreement (“PLA”) entered into between the City and the Building and Construction Trades Council of Greater New York (“BCTC”) affiliated Local Unions. By submitting a bid, the Contractor agrees that if awarded the Contract the PLA is binding on the Contractor and all subcontractors of all tiers.

The bidder to be awarded the contract will be required to execute a Letter of Assent prior to award. The Contractor shall include in any subcontract a requirement that the subcontractor, and sub-subcontractors of all tiers, become signatory to and bound to the PLA with respect to the subcontracted work. The Contractor will also be required to have all subcontractors of all tiers execute a Letter of Assent prior to such subcontractors performing any Program Work.

Bidders are advised that the City of New York and City agencies have entered into multiple PLAs. The terms of each PLA, while similar, are not identical. Please also note that there are revisions between the 2020 Citywide Renovation PLA attached to this bid and the prior 2015 Citywide Renovation PLA.

All bidders are urged to review the entire 2020 Citywide Renovation PLA prior to submitting a bid.

To the extent that the terms of the PLA conflict with any other terms of the invitation for bids, including the Standard Construction Contract, the terms of the PLA shall govern. For example, the PLA section that authorizes the scheduling of a four-day week, ten hours per day on straight time at the commencement of the job, PLA Article 12, Section 1(A), overrides the Standard Construction Contract’s provision concerning a five-day work week with a maximum of eight hours in a day, Standard

Construction Contract Article 37.2.1. Where, however, the invitation for bids, including the Standard Construction Contract, requires the approval of the City/Department, the PLA does not supersede or eliminate that requirement.

This Contract is subject to the apprenticeship requirements of Labor Law § 222 and to apprenticeship requirements established by the Department pursuant to Labor Law § 816-b. Please be advised that the involved trades have apprenticeship programs that meet the statutory requirements of Labor Law § 222(e) and the requirements set by the Department pursuant to Labor Law § 816-b, Contractors and subcontractors who agree to perform the Work pursuant to the PLA are participating in such apprenticeship programs within the meaning of Labor Law § 222(e) and the Department's directive.

If this Contract is subject to the Minority-Owned and Women-Owned Business Enterprise ("M/WBE") program implemented pursuant to New York City Administrative Code § 6-129, the specific requirements of M/WBE participation for this Contract are set forth elsewhere in this bid package. If such requirements are included with this Contract, the City strongly advises Contractors to read those provisions, as well as PLA Article 4, Section 4. A list of certified M/WBE firms may be obtained from the Department of Small Business Services (DSBS) website at <http://mtprawvwsbswtp1-1.nyc.gov/>, emailing MWBE@sbs.nyc.gov, or by calling the DSBS certification hotline at (212) 513-6311, or by visiting or writing the DSBS at One Liberty Plaza, 11th Floor, New York, New York, 10006.

The local collective bargaining agreements (CBAs) that are incorporated into the PLA as PLA Schedule A Agreements are available from the Department's Agency Chief Contract Officer upon the request of any prospective bidder.

Please note that the "PLA Schedule A" is distinct from the Department's Schedule A that is a part of this invitation for bids.

2020 Citywide Renovation Project Labor Agreement Frequently Asked Questions

1. **Q.** Does a Contractor need to be signatory with the unions in the NYC Building and Construction Trades Council (“BCTC”) in order to bid on projects under the PLA?

A. No, any contractor may bid by signing and agreeing to the terms of the PLA. The contractor need not be signatory with these unions by any other labor agreement or for any other project.

2. **Q.** Does a Contractor agreeing to the PLA and signing the Letter of Assent create a labor agreement with these unions outside of the project covered by the PLA?

A. No, the PLA applies only to those projects that the Contractor agrees to perform under the PLA and makes no labor agreement beyond those projects. Contractors do not need to sign any additional agreements (*e.g.*, a collective bargaining agreement) with a union aside from the Letter of Assent to work on a PLA project.

3. **Q.** Do the provisions of the PLA apply equally to subcontractors as well as contractors and how does the PLA affect the subcontractors that a bidder may utilize on the project?

A. Yes, the PLA applies to subcontractors and all subcontractors performing Program Work must agree to become party to the PLA. Subject to the Agency’s approval of subcontractors pursuant to Article 17 of the Standard Construction Contract, a Contractor may use any subcontractor, union or non-union, as long as the subcontractor signs the Letter of Assent. See PLA Article 2, Section 8.

4. **Q.** Are bidders required to submit Letters of Assent signed by proposed subcontractors with their bid in order to be found responsive?

A. No, bidders do not have to submit signed Letters of Assent from their subcontractors with their bid. However, subcontractors performing Program Work will be required to sign the Letter of Assent prior to being approved by the Agency.

5. **Q.** May a Contractor or subcontractor use any of its existing employees to perform this work?

A. Generally, labor will be referred to the Contractor from the respective signatory local unions. However, Contractors and subcontractors may use up to 12% of their existing, qualifying labor force for this work. Certified M/WBEs for which participation goals are set pursuant to NYC Administrative Code § 6-129 that are not signatory to any Schedule A collective bargaining agreements (“CBAs”) may use their existing employees for the 2nd, 4th, 6th and 8th employee (per trade) needed on the job if their contracts are valued at or under \$2,000,000. Any additional workers will be referred to the Contractor in accordance with the 12% referral requirements set forth in the PLA. See PLA Article 4, Section 2.

6. **Q.** Must the City set M/WBE participation goals for the particular project or contract in order for a certified M/WBE to utilize the provisions of PLA Article 4, Section 2(C)?

A. No. PLA Article 4, Section 2(C) specifies what categories of M/WBEs are eligible to take advantage of this provision (i.e., those M/WBEs for which the City is authorized to set participation goals under § 6-129). For purposes of Article 4, Section 2(C), it is not necessary for the project to be subject to § 6-129 or for the City to have actually set participation goals for the particular contract or project. The result is the same where a project receives State funding and therefore is subject to the requirements of Article 15-A of the Executive Law.

7. **Q.** May a Contractor bring in union members from locals that are not signatory unions?

A. Referrals will be from the respective signatory locals and/or locals listed in Schedule A of the PLA. Contractors may utilize ‘traveler provisions’ contained in the local CBAs where such provisions exist and/or in accordance with the provisions of PLA Article 4, Section 2.

8. **Q.** Does a non-union employee working under the PLA automatically become a union member?

A. No, the non-union employee does not automatically become a union member by working on a project covered by the PLA and nothing in the PLA requires employees to join a union or pay dues or fees to a union as a condition of working on the covered project. This Agreement is not, however, intended to supersede independent requirements in applicable local union agreements as to contractors that are otherwise signatory to those agreements and as to employees of such employers performing covered work. Non-union employees will be enrolled in the appropriate benefit plans and earn credit toward various union benefit programs except in certain circumstances as set forth in the PLA. See PLA Article 4, Section 6 and Article 11.

9. **Q.** Are all Contractors and subcontractors working under the PLA, including non-union Contractors and Contractors signatory to CBAs with locals other than those that are signatories to the PLA, required to make contributions to designated employee benefit funds?

A. Except in certain circumstances, as described in the following paragraph, Contractors and subcontractors working under the PLA will be required to contribute on behalf of all employees covered by the PLA to established jointly trustee employee benefit funds designated in the Schedule A CBAs and required to be paid on public works under any applicable prevailing wage law. The Agency may withhold from amounts due the Contractor any amounts required to be paid, but not actually paid into any such fund by the Contractor or a subcontractor. See PLA Article 11, Section 2.

Non-union Contractors with bona fide private benefit plans that satisfy the requirements of Labor Law 220 will not be required to pay into union benefit funds for their employees working pursuant to Article 4, Section 2 (B) and (C) (“Core Employees”) who are already covered under their bona fide private benefit plans. Supplemental

benefit funds in excess of the annualized value of the private benefit plans will be paid directly to workers as additional wages in compliance with Labor Law § 220. At the time of contract award, the Contractor shall make available to the contracting Agency a complete set of plan documents for each private benefit plan into which contributions will be made and/or coverage provided. The Contractor shall also provide certification from a certified public accountant as to the annualized hourly value of such benefits consistent with the requirements of Labor Law § 220. See PLA Article 11, Section 2.

10. **Q.** When do Core Employees become eligible for union benefits?

A. Union benefit plans have their own plan documents that determine eligibility and workers will become eligible for certain benefits at different points in time. Contractors who will have Core Employees should speak with the respective union(s) as to benefit eligibility thresholds. Employees that may remain unaffiliated with any local union at the completion of their employment may apply for any distributions to which they may be entitled from the funds in accordance with the applicable rules and governing documents of the unions and the employee benefit funds.

11. **Q.** What happens if a Contractor or subcontractor fails to make a required payment to a designated employee benefit fund?

A. The PLA sets forth a process for unions to address a Contractor or a subcontractor's failure to make required payments. The process includes potentially the direct payment by the City to the benefit fund of monies owed and the corresponding withholding of payments to the Contractor. See PLA Article 11, Section 2.

Upon notification by a union or fringe benefit fund that a Contractor is delinquent in its payment of benefits and a determination by the Agency that the union or fund has submitted appropriate documentation of such delinquency, the Agency will thereafter require the Contractor to submit cancelled checks or other equivalent proof of payment of benefit contributions with certified payroll reports for work covered by this PLA on which the Contractor is engaged.

The City strongly advises Contractors to read these provisions carefully and to include appropriate provisions in subcontracts addressing these possibilities.

12. **Q.** Does signing on to the PLA satisfy the Apprenticeship Requirements established for this bid?

A. Yes. By agreeing to perform the Work subject to the PLA, the bidder demonstrates compliance with the apprenticeship requirements imposed by this Invitation for Bids.

13. **Q.** Who decides on the number of workers needed?

A. Except as expressly limited by a specific provision of the PLA, a Contractor retains full and exclusive authority for the management of their operations, including the determination as to the number of employees to be hired and the qualifications therefore and the promotion, transfer, and layoff of its employees. See PLA Article 6, Section 1.

14. **Q.** What happens if a union does not provide a worker within 48 hours from the request (Saturdays, Sundays, and holidays excepted)?
- A.** In the event that a Local Union does not fill any request for qualified employees within a 48-hour period after such requisition is made by a Contractor (Saturdays, Sundays and holidays excepted), a Contractor may employ qualified applicants from any other available source.
15. **Q.** May a Contractor discharge a union referral for lack of productivity?
- A.** Except as expressly limited by a specific provision of the PLA, a Contractor retains full and exclusive authority for the management of their operations, including the right to discipline or discharge for just cause its employees. See PLA Article 6, Section 1.
16. **Q.** May a contractor assign a management person to site?
- A.** Yes. Managers are not subject to the provisions of the PLA, so there is no restriction on management and/or other non-trade personnel, as long as such personnel do not perform trade functions. See Article 3, Section 1.
17. **Q.** What type of work can Stewards perform?
- A.** All Stewards must be working Stewards (*i.e.*, they must be performing Program Work). In addition, Stewards may perform other tasks such as receiving complaints or grievances from other employees of the Steward's trade. Stewards may not determine when overtime is worked. Stewards are entitled to the same wages as other employees of that trade. See PLA Article 5, Sections 2 and 3.
18. **Q.** Can a Contractor utilize apprentices?
- A.** Contractors are permitted to utilize apprentices so long as the ratios between journeyman and apprentice do not exceed the allowable ratios set by the New York State Department of Labor ("NYSDOL"). Should a Contractor request that apprentices be provided for Program Work, the referring Local Union shall comply with that request so long as it is consistent with the maximum ratios permitted by NYSDOL.
19. **Q.** What is HireNYC Construction Careers?
- A.** HireNYC Construction Careers is an initiative to advance career opportunities within the construction industry. The initiative has a target goal of 30% of all hours worked on PLA projects are performed by workers who reside in NYCHA housing or zip codes where 15% or more of the residences are below poverty. When a Contractor requests employees, the trades will take into account the target goals when they refer additional workers.

20. **Q.** Does the PLA provide a standard work day across all the signatory trades?
- A.** Yes, all signatory trades will work an eight (8) hour day, Monday through Friday with a day shift at straight time as the standard work week. The PLA also permits a Contractor to schedule a four-day (within Monday through Friday) work week, ten (10) hours per day at straight time if announced at the commencement of the project. See PLA Article 12, Section 1. This is an example where the terms of the PLA override provisions of the Standard Construction Contract (compare with section 37.2 of the Standard Construction Contract). The standard work week may be reduced to 35 or 37 ½ hours of work in those limited circumstances where the City states in the bid documents that the Contractor will not be given access to the site to accommodate an 8-hour day. The 8 hour, 7 ½ hour or 7-hour work day must be established at the commencement of the project by the Agency and may not be altered by the Contractor.
21. **Q.** Does the PLA create a common holiday schedule for all the signatory trades?
- A.** Yes, the PLA recognizes nine common holidays. See PLA Article 12, Section 4.
22. **Q.** Are workers entitled to holiday pay if they do not work on the holiday?
- A.** No. Workers are only entitled to pay if they work on the holiday. See PLA Article 12, Section 4.
23. **Q.** Does the PLA provide for a standard policy for ‘shift work’ across all signatory trades?
- A.** Yes, second and third shifts may be worked with a standard 5% premium pay. In addition, a day shift does not have to be scheduled in order to work the second and third shifts at the 1.05 hourly pay rate. See PLA Article 12, Section 3.
24. **Q.** May the Contractor schedule overtime work, including work on a weekend?
- A.** Yes, the PLA permits the Contractor to schedule overtime work, including work on weekends. See PLA Article 12, Sections 2, 3, and 5. To the extent that the Agency’s approval is required before a Contractor may schedule or be paid for overtime, that approval is still required notwithstanding the PLA language.
25. **Q.** Are overtime payments affected by the PLA?
- A.** Yes, all overtime pay incurred Monday through Saturday will be at time and one half (1 ½). There will be no stacking or pyramiding of overtime pay under any circumstances. See PLA Article 12, Section 2. Sunday and holiday overtime will be paid according to each trade’s CBA.
26. **Q.** Are there special provisions for Saturday work when a day is ‘lost’ during the week due to weather, power failure or other emergency?
- A.** Yes, when this occurs the Contractor may schedule Saturday work at weekday rates. See PLA Article 12, Section 5.

27. **Q.** Does the PLA contain special provisions for the staffing of temporary services?
- A.** Yes. Where temporary services are required by specific request of the Agency or construction manager, they shall be provided by the Contractor's existing employees during working hours in which a shift is scheduled for employees of the Contractor. The need for temporary services during non-working hours will be determined by the Agency or construction manager. There will be no stacking of trades on temporary services. See PLA Article 15.
28. **Q.** What do the workers get paid when work is terminated early in a day due to inclement weather or otherwise cut short of 8 hours?
- A.** The PLA provides that employees who report to work pursuant to regular schedule and not given work will be paid two hours of straight time. Work terminated early for severe weather or emergency conditions will be paid only for time actually worked. In other instances where work is terminated early, the worker will be paid for a full day. See PLA Article 12, Sections 6 and 8. The usual reporting pay requirement of two hours for employees who report to their work location pursuant to their regular schedule does not apply when the National Weather Service issues a Weather Advisory and the Contractor speaks to the employee at least four hours before their shift starting time. See PLA Article 12, Section 6.
29. **Q.** Should a local collective bargaining agreement of a signatory union expire during the project will a work stoppage occur on a project subject to the PLA?
- A.** No. All the signatory unions are bound by the 'no strike' agreement as to the PLA work. Work will continue under the PLA and the otherwise expired local CBA(s) until the new local CBA(s) are negotiated and in effect. See PLA Articles 7 and 19.
30. **Q.** May a Contractor working under the PLA be subject to a strike or other boycott activity by a signatory union at another site while the Contractor is a signatory to the PLA?
- A.** Yes. The PLA applies ONLY to work under the PLA and does not regulate labor relations at other sites even if those sites are in close proximity to PLA work.
31. **Q.** If a Contractor has worked under other PLAs in the New York City area, are the provisions in this PLA generally the same as the others?
- A.** While PLAs often look similar to each other, and particular clauses are often used in multiple agreements, each PLA is a unique document and should be examined accordingly.
32. **Q.** What happens if a dispute occurs between the Contractor and an employee during the project?
- A.** The PLA contains a grievance and arbitration process to resolve disputes between the Contractor and the employees. See PLA Article 9.

33. **Q.** What happens if there is a dispute between locals as to which local gets to provide employees for a particular project or a particular aspect of a project?

A. The PLA provides for jurisdictional disputes to be resolved in accordance with the NY Plan. A copy of the NY Plan is available upon request from the Agency. The PLA provides that work is not to be disrupted or interrupted pending the resolution of any jurisdictional dispute. The work proceeds as assigned by the Contractor until the dispute is resolved. See PLA Article 10.

34. **Q.** Does the PLA contain special provisions for JOCS or task order-based Contracts?

A. The PLA does not apply to Task Orders or Work Orders that do not exceed \$250,000 issued under JOCS or Requirements Contracts. See PLA Article 3, Section 1.

35. **Q.** How do the referral rules work for Operating Engineers Locals 14 and 15?

A. If there is Program Work within the jurisdiction of Operating Engineers Locals 14 or 15, the contractor shall request labor from the appropriate local union. If the locals provide labor consistent with the referral provisions outlined in Article 4, Section 2, the terms of the Local 14 CBA or Local 15 CBA will apply to that work. However, if the locals do not provide labor for that work, the terms of the PLA will apply to such work.

THIS PAGE INTENTIONALLY LEFT BLANK

District Councils & Affiliates Contact Information

Bricklayers & Allied Craftworkers Local 1
 4 Court Square
 Long Island City, NY 11101
 Business Manager: Jack Argila
 P: (718) 392-0525
 email: jargila@bac1ny.com

BoilerMakers Local 5
 24 Van Siclen Avenue
 Floral Park, NY 11001
 Business Manager: Steve Ludwigson
 P: 516-326-2500
 email: boilermakerslocal5@verizon.net

Building Concrete & Excavating Laborers Local 731
 34-11 35th Avenue
 Astoria, NY 11106
 Business Manager: Joseph D'Amato
 P: 718-706-0720
 email: joed731bm@gmail.com

***NYC & Vicinity District Council of Carpenters**
 395 Hudson Street, 9th Fl
 New York, NY 10014
 Business Manager: Joe Geiger
 P: 212-366-7500
 email: jgeiger@nycdistrictcouncil.org

***Concrete Workers District Council No. 16**
 30-56 Whitestone Expressway Suite 320
 Flushing, NY 11354
 Business Manager: Angelo Angelone
 P: 718-886-0516
 email: ccwdc16@yahoo.com

Cement Masons Local #780
 150-50 14th Rd Suite 4
 Whitestone, NY 11357
 Business Manager: Gino Castingnoli
 P: 718-357-3750
 email: gcastignoli@noedc.org

Electrical Local 3
 158-11 Harry Van Arsdale Jr. Avenue
 Flushing, NY 11365
 Business Manager: Chris Erikson
 P: 718-591-4000
 email: cerikson@local3ibew.org

Roofers & Waterproofers Local 8
 12-11 43rd Avenue
 LIC, NY 11101
 Business Manager: Nick Siciliano
 P: 718-361-1169
 email: nick@fundsforlocal8roofers.org

SheetMetal Workers Local 28
 500 Greenwich Street
 New York, NY 10013
 Business Manager: Eric Meslin
 P: 212-941-7700
 email: emeslin@local28union.com

SheetMetal Workers Local 137
 21-42 44th Drive
 LIC, NY 11101
 Business Manager: Dante Dano
 P: 718-937-4514
 email: dante@local137.com

Elevator Constructors Local 1
 47-24 27th Avenue
 LIC, NY 11101
 Business Manager: Lenny Legotte
 P: 718-767-7004
 email: llegotte@localoneiuec.com

Engineers Local 14
 141-57 Northern Boulevard
 Flushing, NY 11354
 Business Manager: Edwin Christian
 P: 718-939-0600
 email: lynnd@iuoelocal14.com

Engineers Local 15, 15A, 15B, 15C & 15D
 44-40 11th Street
 Long Island City, 11101
 Business Manager: Tom Callahan
 P: 212-929-5327
 email: love015@aol.com

Engineers Local 30
 16-16 Whitestone Expressway
 Whitestone, NY 11357
 Business Manager: William Lynn
 P: 718-847-8484
 email: williamlynn@iuoelocal30.org

Engineers Local 94
 331-337 West 44th Street
 New York, NY 10036
 Business Manager: Kuba Brown
 P: 212-245-7040
 email: kubabrown@local94.com

Heat & Frost Insulators Local 12
 35-53 24th Street
 LIC, NY 11101
 Business Manager: John Jovic
 P: 718-784-3456
 email: john@insulatorslocal12.com

Heat & Frost Insulators Local 12A
 1536 127th Street
 College Point, NY 11356
 Business Manager: Jamie Soto
 P: 718-886-7226
 email: jsoto.12a@aol.com

Steamfitters Local 638
 32-32 48th Avenue
 LIC, NY 11101
 Business Manager: Scott Roche
 P: 718-392-3420
 email: popparoch@gmail.com

Teamsters Local 282
 2500 Marcus Avenue
 Lake Success, NY 11042
 Business Manager: Tom Gesauldi
 P: 516-488-2822 #141
 email: tgesualdi282@yahoo.com

Teamsters Local 814
 21-42 44th Drive
 LIC, NY 11101
 Business Manager: Jason Ide
 P: 718-609-6407
 email: jasonl@ibt814.com

***Iron Workers District Council**
 227 E 56th Street Suite 300A
 New York, NY 10022
 Business Manager: James Mahoney
 P: 212-302-1868
 email: jmahoney@iwintl.org

***Mason Tenders District Council**
 520 8th Avenue
 New York NY 10018
 Business Manager: Robert Bonanza
 P: 212-452-9400
 email: RBonanza@MasonTenders.org

***Painters District Council No. 9**
 45 West 14th Street
 New York, NY 10011
 Business Manager: Joe Azzopardi
 P: 212-255-2950
 email: joeazzo1281@yahoo.com

Pavers & Roadbuilders DC No.1
 136-25 37th Avenue, Suite 502
 Flushing NY 11354
 Business Manager: Keith Lozcalzo
 P: 718-886-3310
 email: klozcalzo@aol.com

Plasterers Local 262
 2241 Conner Street
 Bronx, NY 10466
 Business Manager: Dale Alleyne
 P: 718-547-5440
 email: dalleyne@noedc.org

Plumbers Local 1
 50-02 5th Street
 Long Island City, NY 11101
 Business Manager: Michael Apuzzo
 P: 718-738-7500 #5904
 email: mapuzzo@ualocal1.org

Private Sanitation Local 813
 45-18 Court Square, Suite 600
 LIC, NY 11101
 Business Manager: Sean Campbell
 P: 718-937-7010 ext 244
 email: orodriguez@teamsters813.org

Tile Marble & Terrazzo Local 7
 45-34 Court Square
 LIC, NY 11101
 Business Manager: William Hill
 P: 718-786-7648
 email: whill@baclocal7.com

Window Cleaners No. 2 SEIU 32BJ
 101 Avenue of the Americas
 New York, NY 10013
 Business Manager: Gerard McEneaney
 P: 212-539-2904
 email: gmceneaney@seiu32bj.org

Carpenters District Council

NYC & Vicinity District Council of Carpenters

395 Hudson Street, 9th Fl

New York, NY 10014

Business Manager: Joe Geiger

P: 212-366-7500

Carpenters Local 20
900 South Avenue
Suite 53
Staten Island, NY 10310

Carpenters Local 926
373 96th Street
Brooklyn, NY 11209
P: 718-491-0926

Carpenters Local 45
214-38 Hillside Avenue
Queens Village, NY 11427
P: 718-464-6016

Dockbuilders/Timberman Local 1556
395 Hudson Street 1st Floor
New York, NY 10014

Carpenters Local 157
395 Hudson Street 1st Fl
New York, NY 10014
P: 212-685-0567

Millwright & Machinery Erectors Local 740
89-07 Atlantic Avenue
Woodhaven, NY 11412
P: 718-849-3636

Concrete Workers District Council No. 16

*Concrete Workers District Council No. 16
30-56 Whitestone Expressway Suite 320
Flushing, NY 11354
Business Manager: Angelo Angelone
P: 718-886-36432*

Cement & Concrete Workers Local 6A
30-56 Whitestone Expressway
Suite 310
Flushing, NY 11354
Business Manager: Anthony Amella Jr
P: 718-888-9383
email: ccwl6a@aol.com

Cement & Concrete Workers Local 20
36-36 33rd Street
Suite 302
LIC, NY 11106
Business Manager: John Peters
P: 718-361-8131
email: local20@laborerslocal20.org

Cement & Concrete Workers Local 18A
4235 Katonah Avenue
Bronx, NY 10470
Business Manager: Kieran O'Sullivan
P: 718-798-9035
email: local18a@yahoo.com

Iron Workers District Council

**Iron Workers District Council*

227 E 56th Street Suite 300A

New York, NY 10022

Business Manager: James Mahoney

P: 212-302-1868

email: jmahoney@iwintl.org

IronWorkers Local 361

89-19 97th Avenue

Ozone Park, NY 11416

Business Manager: Matthew Chartrand

P: 718-322-1016/17

email: mchartrand@local361.com

Metal Lathers Local 46

1332 Third Avenue

New York, NY 10021

Business Manager:

P: 212-737-0500

email:

Ironworkers Local 40

451 Park Avenue South

New York, NY 10016

Business Manager: Bob Walsh

P: 212-889-1320

email: bobwalsh@ironworkers.net

Derrickmen & Riggers Local 197

35-53 24th Street

LIC, NY 11106

Business Manager: William Hayes

P: 718-361-6534

email: billhayes197@yahoo.com

Ornamental IronWorkers Local 580

501 West 42nd Street

New York, NY 10036

Business Manager: Pete Myers

p: 212-594-1662

email: pmyers@Local-580.com

Mason Tenders District Council

****Mason Tenders District Council***

520 8th Avenue

New York NY 10018

Business Manager: Robert Bonanza

P: 212-452-9400

email: RBonanza@MasonTenders.org

Construction & General Laborers Local 79

520 8th Avenue

New York, NY 10018

Business Manager: Michael Prohaska

P: 212-465-7900

email: mpro@laborerslocal79.org

Asbestos Lead & Hazardous Waste Laborers Local 78

30 Cliff Street

New York, NY 10038

Business Manager: Pawell Gruchacz

P: 212-227-4803

email: pgruchacz@local78.org

Painters District Council # 9

**Painters District Council No. 9*

45 West 14th Street

New York, NY 10011

Business Manager: Joseph Azzopardi

P: 212-255-2950

Drywall Tapers Local 1974

265 West 14th Street

New York, NY 10011

Business Manager: Sal Marsala

P: 212-242-8500

email:

Painters Structural Steel Local 806

40 West 27th Street

New York, NY 10001

Business Manager: Brian Casey

P: 212-447-1838/0149

email: bcasey6009@gmail.com

Glaziers Local 1087

45 West 14th Street

New York, NY 10011

Business Manager: Steve Birmingham

P: 212-924-5200

email: bermo1087@gmail.com

Metal Polishers Local 8A-28A

36-18 33rd Street 2nd Floor

LIC, NY 11106

Business Manager:

P: 718-361-1770

email:

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

**PROJECT LABOR AGREEMENT
COVERING SPECIFIED
RENOVATION & REHABILITATION
OF CITY OWNED BUILDINGS AND STRUCTURES**

2020 – 2024

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

TABLE OF CONTENTS

	PAGE
ARTICLE 1 - PREAMBLE.....	1
SECTION 1. PARTIES TO THE AGREEMENT.....	2
ARTICLE 2 - GENERAL CONDITIONS.....	2
SECTION 1. DEFINITIONS.....	2
SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE.....	4
SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT.....	4
SECTION 4. SUPREMACY CLAUSE.....	4
SECTION 5. LIABILITY.....	5
SECTION 6. THE AGENCY.....	6
SECTION 7. AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS.....	6
SECTION 8. SUBCONTRACTING.....	6
ARTICLE 3 - SCOPE OF THE AGREEMENT.....	7
SECTION 1. WORK COVERED.....	7
SECTION 2. TIME LIMITATIONS.....	9
SECTION 3. EXCLUDED EMPLOYEES.....	9
SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES.....	11
ARTICLE 4 - UNION RECOGNITION AND EMPLOYMENT.....	11
SECTION 1. PRE-HIRE RECOGNITION.....	11
SECTION 2. UNION REFERRAL.....	11
SECTION 3. NON-DISCRIMINATION IN REFERRALS.....	13
SECTION 4. MINORITY, FEMALE, LOCAL AND SECTION 3 REFERRALS.....	14
SECTION 5. CROSS AND QUALIFIED REFERRALS.....	15
SECTION 6. CRAFT FOREPERSONS AND GENERAL FOREPERSONS.....	15
SECTION 7. ON CALL REPAIR REFERRALS.....	15
ARTICLE 5 - UNION REPRESENTATION.....	17
SECTION 1. LOCAL UNION REPRESENTATIVE.....	17
SECTION 2. STEWARDS.....	17

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SECTION 3. LAYOFF OF A STEWARD..... 18

ARTICLE 6 - MANAGEMENT’S RIGHTS 18

 SECTION 1. RESERVATION OF RIGHTS..... 18

 SECTION 2. MATERIALS, METHODS & EQUIPMENT 19

ARTICLE 7 - WORK STOPPAGES AND LOCKOUTS 20

 SECTION 1. NO STRIKES-NO LOCK OUT 20

 SECTION 2. DISCHARGE FOR VIOLATION 20

 SECTION 3. NOTIFICATION 20

 SECTION 4. EXPEDITED ARBITRATION 21

 SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION..... 22

ARTICLE 8 - LABOR MANAGEMENT COMMITTEE..... 23

 SECTION 1. SUBJECTS 23

 SECTION 2. COMPOSITION 23

ARTICLE 9 - GRIEVANCE & ARBITRATION PROCEDURE..... 23

 SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES 23

 SECTION 2. LIMITATION AS TO RETROACTIVITY 26

 SECTION 3. PARTICIPATION BY AGENCY AND/OR
 CONSTRUCTION MANAGER..... 26

ARTICLE 10 - JURISDICTIONAL DISPUTES 27

 SECTION 1. NO DISRUPTIONS 27

 SECTION 2. ASSIGNMENT 27

 SECTION 3. NO INTERFERENCE WITH WORK 27

ARTICLE 11 - WAGES AND BENEFITS 27

 SECTION 1. CLASSIFICATION AND BASE HOURLY RATE 27

 SECTION 2. EMPLOYEE BENEFITS..... 28

ARTICLE 12 - HOURS OF WORK, PREMIUM PAYMENTS, SHIFTS
AND HOLIDAYS 32

 SECTION 1. WORK WEEK AND WORKDAY 32

 SECTION 2. OVERTIME 33

 SECTION 3. SHIFTS 34

 SECTION 4. HOLIDAYS..... 35

 SECTION 5. MAKE-UP DAYS..... 36

 SECTION 6. REPORTING PAY 36

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SECTION 7. PAYMENT OF WAGES 37

SECTION 8. EMERGENCY WORK SUSPENSION 37

SECTION 9. INJURY/DISABILITY 38

SECTION 10. TIME KEEPING 38

SECTION 11. MEAL PERIOD 38

SECTION 12. BREAK PERIODS..... 38

ARTICLE 13 - APPRENTICES AND WORKFORCE DEVELOPMENT 39

 SECTION 1. APPRENTICE RATIOS AND REFERRALS..... 39

 SECTION 2. WORKFORCE DEVELOPMENT 39

ARTICLE 14 - SAFETY PROTECTION OF PERSON AND PROPERTY 41

 SECTION 1. SAFETY REQUIREMENTS 41

 SECTION 2. CONTRACTOR RULES..... 42

 SECTION 3. INSPECTIONS 42

ARTICLE 15 - TEMPORARY SERVICES 42

ARTICLE 16 - NO DISCRIMINATION..... 43

 SECTION 1. COOPERATIVE EFFORTS 43

 SECTION 2. LANGUAGE OF AGREEMENT 43

ARTICLE 17 - GENERAL TERMS 43

 SECTION 1. PROJECT RULES 43

 SECTION 2. TOOLS OF THE TRADE 44

 SECTION 3. SUPERVISION 44

 SECTION 4. TRAVEL ALLOWANCES 44

 SECTION 5. FULL WORKDAY 44

 SECTION 6. COOPERATION AND WAIVER..... 44

ARTICLE 18 - SAVINGS AND SEPARABILITY 45

 SECTION 1. THIS AGREEMENT 45

 SECTION 2. THE BID SPECIFICATIONS 45

 SECTION 3. NON-LIABILITY 46

 SECTION 4. NON-WAIVER 46

ARTICLE 19 - FUTURE CHANGES IN SCHEDULE "A" AREA
CONTRACTS 46

 SECTION 1. CHANGES TO AREA CONTRACTS 46

 SECTION 2. LABOR DISPUTES DURING AREA CONTRACT

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

NEGOTIATIONS 47

ARTICLE 20 - WORKERS' COMPENSATION ADR 47

 SECTION 1..... 47

ARTICLE 21 - HELMETS TO HARDHATS 47

 SECTION 1..... 47

 SECTION 2..... 48

SIGNATURE PAGES 54

SCHEDULE "A" - CBAs 84

 Exhibit A..... 89

 Project Labor Agreement - Letter of Assent 89

 Exhibit B..... 91

NEW YORK CITY BUILDING AND CONSTRUCTION TRADES
COUNCIL STANDARDS OF EXCELLENCE 91

 Exhibit C - ZIP CODE LIST 92

 Exhibit D - MEMORANDUM OF UNDERSTANDING.....917

SCHEDULE "B" - DRUG AND ALCOHOL POLICY 102

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

**PROJECT LABOR AGREEMENT COVERING SPECIFIED
RENOVATION & REHABILITATION OF NEW YORK CITY OWNED
BUILDINGS & STRUCTURES**

ARTICLE 1 - PREAMBLE

WHEREAS, the City of New York desires to provide for the cost efficient, safe, quality, and timely completion of certain rehabilitation and renovation work (“Program Work,” as defined in Article 3) in a manner designed to afford the lowest costs to the Agencies covered by this Agreement, and the public it represents, and the advancement of permissible statutory objectives;

WHEREAS, this Project Labor Agreement will foster the achievement of these goals, inter alia, by:

(1) providing a mechanism for responding to the unique construction needs associated with this Program Work and achieving the most cost-effective means of construction, including direct labor cost savings, by the Building and Construction Trades Council of Greater New York and Vicinity and the signatory Local Unions and their members waiving various shift and other hourly premiums and other work and pay practices which would otherwise apply to Program Work;

(2) expediting the construction process and otherwise minimizing the disruption to the covered Agencies’ ongoing operations at the facilities that are the subject of the Agreement;

(3) avoiding the costly delays of potential strikes, slowdowns, walkouts, picketing and other disruptions arising from work disputes, reducing jobsite friction on common situs worksites, and promoting labor harmony and peace for the duration of the Program Work;

(4) standardizing the terms and conditions governing the employment of labor on Program Work;

(5) permitting wide flexibility in work scheduling and shift hours and times to allow maximum work to be done during off hours yet at affordable pay rates;

(6) permitting adjustments to work rules and staffing requirements from those which otherwise might obtain;

(7) providing comprehensive and standardized mechanisms for the settlement of work disputes, including those relating to jurisdiction;

(8) fostering increased participation by Minority and Women-owned Business Enterprises (“MWBEs”);

(9) encouraging the development of pathways to construction careers;

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

- (10) ensuring a reliable source of skilled and experienced labor; and
- (11) securing applicable New York State Labor Law exemptions.

WHEREAS, the Building and Construction Trades Council of Greater New York and Vicinity, its participating affiliated Local Unions and their members, desire to assist the City in meeting these operational needs and objectives as well as to provide for stability, security and work opportunities which are afforded by this Project Labor Agreement; and

WHEREAS, the Parties desire to maximize Program Work safety conditions for both workers and the community in the project area.

NOW, THEREFORE, the Parties enter into this Agreement:

SECTION 1. PARTIES TO THE AGREEMENT

This is a Project Labor Agreement (“Agreement”) entered into by the City of New York (“City”), on behalf of itself and the Agencies covered herein, including in their capacity as construction manager of covered projects and/or on behalf of any third party construction manager which may be utilized, and the Building and Construction Trades Council of Greater New York and Vicinity (“Council” or “BCTC”) (on behalf of itself) and the signatory affiliated Local Unions (“Unions” or “Local Unions”). The Council and each signatory Local Union hereby warrant and represents that it has been duly authorized to enter into this Agreement.

ARTICLE 2 - GENERAL CONDITIONS

SECTION 1. DEFINITIONS

A. The term “Agency” means the following New York City agencies: the Department for the Aging (“DFTA”), Administration for Children’s Services (“ACS”), Department of Citywide Administrative Services (“DCAS”), Department of Correction (“DOC”), Department of Design and Construction (“DDC”), Fire Department (“FDNY”), Department of Homeless Services (“DHS”), Human Resources Administration (“HRA”), Department of Health and Mental Hygiene (“DOHMH”), Department of Parks and Recreation (“DPR”), Police Department (“NYPD”),

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

Department of Sanitation (“DSNY”); Department of Transportation (“DOT”), Department of Buildings (“DOB”); with respect to Program Work as defined in Article 3, the New York City Agency that awards a particular contract subject to this Agreement may be referred to hereafter as the “Agency”;

B. The term “Agreement” means this project labor agreement (“PLA”), the applicable Schedule “A” Collective Bargaining Agreements (each a “CBA”) identified in Schedule “A”, and each Exhibit hereto;

C. The term “BCTC” refers to the Building and Construction Trades Council of Greater New York and Vicinity. The terms “BCTC” and “Council” are used interchangeably;

D. The term “Contractor(s)” shall include any Construction Manager, General Contractor and all other contractors, and subcontractors of all tiers engaged in Program Work within the scope of this Agreement as defined in Article 3. When an Agency acts as Construction Manager, unless otherwise provided, it has the rights and obligations of a “Construction Manager” in addition to the rights and obligations of an Agency;

E. The term “Core Employee” means an employee that has been on a contractor’s payroll consistent with Article 4, Section 2(B) and (C);

F. The term “Minor Repair” means routine repair, service, or maintenance that is recurrent, day to day, periodic scheduled or routine work required to preserve or restore a building, facility or system to working order;

G. The term “HireNYC Construction Careers” refers to the PLA initiative to advance career opportunities for Program Hires;

H. The term “Program Work” is the work covered by this Agreement as defined in Article 3;

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

I. The term “Program Hire” means an individual that resides in a zip code where at least 15% of the individuals residing in such zip code are below the federal poverty rate and residents of NYCHA housing regardless of zip codes; and

J. The term “Union(s)” or “Local Union(s)” refers to the various participating unions affiliated with the BCTC, singularly and collectively.

SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE

This Agreement shall not become effective unless each of the following conditions are met: the Agreement is executed by (1) the Council, on behalf of itself, (2) the participating affiliated Local Unions; and (3) the mayor of the City of New York or their designee.

SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT

This Agreement shall be binding on all participating Unions and their affiliates, the Construction Manager (in its capacity as such) and all Contractors of all tiers performing Program Work, as defined in Article 3. The Contractors shall include in any subcontract that they let for performance during the term of this Agreement a requirement that their subcontractors, of all tiers, become signatory and bound by this Agreement with respect to that subcontracted work falling within the scope of Article 3 and all Contractors (including subcontractors) performing Program Work shall be required to sign a “Letter of Assent” in the form annexed hereto as Exhibit “A”. This Agreement shall be administered by the applicable Agency or a Construction Manager or such other designee as may be named by the Agency or Construction Manager, on behalf of all Contractors.

SECTION 4. SUPREMACY CLAUSE

This Agreement, together with the local Collective Bargaining Agreements (each a “CBA”) appended hereto as Schedule “A”, represents the complete understanding of all signatories and supersedes any national agreement, local agreement or other CBA of any type which would otherwise apply to this Program Work, in whole or in part, except for Program Work which falls

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

within the jurisdiction of the Operating Engineers Locals 14 and 15. If Program Work falling within the jurisdiction of Operating Engineers Locals 14 and 15 is accepted by and performed by said locals, only then will such work be performed under the terms and conditions set out in the Schedule “A” agreements of Operating Engineers Locals 14 and 15. The CBAs of the affiliated local unions that cover the particular type of construction work to be performed by the contractor, and as set forth in the Schedule “A” list of agreements, shall be deemed the Schedule “A” Collective Bargaining Agreements (“Schedule “A” CBA”) under this Agreement. Where association and independent CBAs for a particular type of construction work are both set forth in Schedule “A”, association members shall treat the applicable association agreement as the Schedule “A” CBA and independent contractors shall treat the applicable independent agreement as the Schedule “A” CBA. Subject to the foregoing, where a subject covered by the provisions of this project labor agreement is also covered by a Schedule “A” CBA, the provisions of this project labor agreement shall prevail. It is further understood that no Contractor shall be required to sign any other agreement as a condition of performing Program Work. No practice, understanding or agreement between a Contractor and a Local Union which is not set forth in this Agreement shall be binding with respect to Program Work unless endorsed in writing by the Construction Manager or such other designee as may be designated by the Agency. Nothing in this Agreement requires employees to join a union or pay dues or fees to a union as a condition of working on the covered project. This Agreement is not, however, intended to supersede independent requirements in applicable local union agreements as to contractors that are otherwise signatory to those agreements and as to employees of such employers performing covered work.

SECTION 5. LIABILITY

The liability of any Contractor and the liability of any Union under this Agreement shall be several and not joint. The Construction Manager and any Contractor shall not be liable for any

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

violations of this Agreement by any other Contractor; and the Council and Local Unions shall not be liable for any violations of this Agreement by any other Union.

SECTION 6. THE AGENCY

The Agency (or Construction Manager where applicable) shall require in its bid specifications for all Program Work within the scope of Article 3 that all successful bidders, and their subcontractors of all tiers, become bound by, and signatory to, this Agreement. The Agency (or Construction Manager) shall not be liable for any violation of this Agreement by any Contractor. It is understood that nothing in this Agreement shall be construed as limiting the sole discretion of the Agency or Construction Manager in determining which Contractors shall be awarded contracts for Program Work. It is further understood that the Agency or Construction Manager has sole discretion at any time to terminate, delay or suspend the Program Work, in whole or part, on any project.

SECTION 7. AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS

The Unions agree that this Agreement will be made available to, and will fully apply to, any successful bidder for (or subcontractor of) Program Work who becomes signatory thereto, without regard to whether that successful bidder (or subcontractor) performs work at other sites on either a union or non-union basis and without regard to whether employees of such successful bidder (or subcontractor) are, or are not, members of any unions. This Agreement shall not apply to the work of any Contractor which is performed at any location other than the site of Program Work.

SECTION 8. SUBCONTRACTING

Contractors will subcontract Program Work only to a person, firm or corporation who is or agrees to become party to this Agreement.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

ARTICLE 3 - SCOPE OF THE AGREEMENT

SECTION 1. WORK COVERED

A. Program Work shall be limited to designated rehabilitation and renovation construction contracts bid and let by an Agency (or its Construction Manager where applicable) after the effective date of this Agreement with respect to rehabilitation and renovation work performed for an Agency on City-owned property under contracts advertised for public solicitation prior to December 31, 2024. Subject to the foregoing, and the exclusions below, such Program Work shall mean any and all contracts that predominantly involve the renovation, alteration, repair, rehabilitation or expansion of an existing City-owned building or structure within the five boroughs of New York City. Examples of Program Work include, but are not limited to, the renovation, repair, alteration and rehabilitation of an existing temporary or permanent structure, or an expansion of above ground structures located in the City on a City-owned building. Program Work shall also include job order contracts (“JOCS”), demolition work, painting services. Low voltage work, site work, elevator work, mold, asbestos and lead abatement, carpentry services, and carpet removal and installation shall be included as Program Work only when incidental to such building renovation and/or rehabilitation of City-owned buildings or structures and included in a contract that predominantly involves such renovation and/or rehabilitation.

B. It is understood that, except where the City specifically applies this Agreement to such work in its bid documents, Program Work does not include, and this Agreement shall not apply to, any other work, including:

1. Contracts that are let under a different project labor agreement with one of the defined City Agencies, and/or other Agencies and Authorities that have entered separate PLAs, such as DEP, NYCHA, H+H and SCA;

2. Contracts let and work performed in connection with projects carried over,

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

recycled from, or performed under bids or rebids relating to work that were bid prior to the effective date of this Agreement or after December 31, 2024;

3. Contracts procured on an emergency basis;
4. Prime contracts that do not exceed \$3,000,000;
5. Contracts for work on streets and bridges and for the closing or environmental remediation of landfills;
6. Contracts with not-for-profit corporations where the City is not awarding or performing the work performed for that entity;
7. Contracts with governmental entities where the City is not awarding or performing the work performed for that entity;
8. Contracts with electric utilities, gas utilities, telephone companies, and railroads, except that it is understood and agreed that these entities may only install their work to a demarcation point, *e.g.*, a telephone closet or utility vault, the location of which is determined prior to construction and employees of such entities shall not be used to replace employees performing Program Work pursuant to this Agreement;
9. Contracts for installation of information technology that are not otherwise Program Work;
10. Task Orders or Work Orders issued under JOCS or Requirements Contracts that do not exceed \$250,000, and JOCS or Requirements Contracts where the monetary value of such contracts predominantly involves such Task Orders or Work Orders;
11. Contracts that predominantly involve Minor Repair work, as defined in Article 2, Section 1(F) above. Such work is to be paid under the applicable prevailing wage law for service or maintenance work;
12. Up to five percent (5%) of work performed by certified MWBE

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

subcontractors on prime contracts that are valued at \$25,000,000 or more and for which participation goals are set forth in the contract and where such MWBE subcontractor is not signatory to any Schedule “A” agreement (“Exempt Work”). Exempt Work shall be no more than \$500,000 or 15% (whichever is greater) of the value of the subcontracts for work in any particular union’s jurisdiction under any prime contract; and

13. On-site work performed on purchased equipment, which is required by the manufacturer to be performed by its staff or by its selected contractors as a condition of the continued effectiveness of the equipment warranty.

SECTION 2. TIME LIMITATIONS

In addition to falling within the scope of Article 3, Section 1, to be covered by this Agreement, Program Work must be (1) advertised and let for bid after the effective date of this Agreement, and (2) let for bid prior to December 31, 2024, the expiration date of this Agreement. It is understood that this Agreement, together with all of its provisions, shall remain in effect for all such Program Work until completion, even if not completed by the expiration date of the Agreement. If Program Work otherwise falling within the scope of Article 3, Section 1 is not let for bid by the expiration date of this Agreement, this Agreement may be extended to that work by mutual agreement of the parties.

SECTION 3. EXCLUDED EMPLOYEES

The following persons are not subject to the provisions of this Agreement, even though performing Program Work:

A. Superintendents, supervisors (except field surveyors on construction contracts, general and forepersons specifically covered by a craft’s Schedule “A” agreement are included), engineers, professional engineers and/or licensed architects engaged in inspection and testing, quality control/assurance personnel, timekeepers, mail carriers, clerks, office workers, messengers,

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

guards, technicians, non-manual employees, and all professional, engineering, administrative and management persons;

B. Employees of the Agency, New York City, or any other municipal or State agency, authority or entity, or employees of any other public employer, even though working on the project site while covered Program Work is underway;

C. Employees and entities engaged in off-site manufacture, modifications, repair, maintenance, assembly, painting, handling or fabrication of project components, materials, equipment or machinery, or involved in deliveries to and from the Program site, except to the extent they are lawfully included in the bargaining unit of a Schedule "A" agreement;

D. Employees of the Construction Manager (except that in the event the Agency engages a Contractor to serve as Construction Manager, then those employees of the Construction Manager performing manual, on site construction labor will be covered by this Agreement);

E. Employees engaged in on-site equipment warranty work including installation, repair or maintenance unless employees are already working on the site and are certified to perform warranty work;

F. Employees engaged in geophysical testing other than boring for core samples;

G. Employees engaged in laboratory, specialty testing, or inspections, pursuant to a professional services agreement between the Agency, or any of the Agency's other professional consultants, and such laboratory, testing, inspection or surveying firms;

H. Employees engaged in on-site maintenance of installed equipment or systems which maintenance is awarded as part of a contract that includes Program Work, but which maintenance occurs after installation of such equipment or system and is not directly related to construction services; and

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

I. Employees who perform work classified as Minor Repairs, and routine service and/or maintenance work.

SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES

This Agreement shall not apply to those parents, affiliates, subsidiaries, or other joint or sole ventures of any Contractor which do not perform Program Work. It is agreed that this Agreement does not have the effect of creating any joint employment, single employer or alter ego status among the Agency (including in its capacity as Construction Manager) or any Contractor. The Agreement shall further not apply to any New York City or other municipal or State agency, authority, or entity other than a listed Agency and nothing contained herein shall be construed to prohibit or restrict the Agency or its employees, or any State, New York City or other municipal or State authority, agency or entity and its employees, from performing on or off-site work related to Program Work.

As the contracts involving Program Work are completed and accepted, the Agreement shall not have further force or effect on such items or areas except where inspections, additions, repairs, modifications, check-out and/or warranty work are assigned in writing (copy to Local Union involved) by the Agency (or Construction Manager) for performance under the terms of this Agreement.

ARTICLE 4 - UNION RECOGNITION AND EMPLOYMENT

SECTION 1. PRE-HIRE RECOGNITION

The Contractors recognize the signatory Unions as the sole and exclusive bargaining representatives of all employees who are performing on-site Program Work, with respect to that work.

SECTION 2. UNION REFERRAL

A. The Contractors agree to request, employ and hire craft employees, including

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

Program Hires as defined in Article 2, Section 1(I), for Program Work covered by this Agreement through the job referral systems and hiring halls established in the Local Unions' area CBAs set forth in Schedule "A". Notwithstanding this, Contractors shall have sole right to determine the competency of all referrals; to determine the number of employees required; to select employees for layoff (subject to Article 5, Section 3); and the sole right to reject any applicant referred by a Local Union, subject to the show-up payments. In the event that a Local Union does not fill any request for qualified employees within a 48-hour period after such requisition is made by a Contractor (Saturdays, Sundays and holidays excepted), a Contractor may employ qualified applicants from any other available source. In the event that the Local Union does not have a job referral system, the Contractor shall give the Local Union first preference to refer applicants, subject to the other provisions of this Article. The Contractor shall notify the Local Union of craft employees hired for Program Work within its jurisdiction from any source other than referral by the Union. Any employee hired by a Contractor because a Local Union does not fill a request for qualified employees within a 48 hour period (Saturdays, Sundays and holidays excepted) are not covered by this Agreement for purposes of Article 11, Section 2, unless they are or become a member or agency shop fee payor of an affiliated Union.

B. A Contractor may request by name, and the Local will honor, referral of persons who have applied to the Local for Program Work ("Core Employees") and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 180 calendar days prior to the contract award.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

No more than twelve per centum (12%) of the employees covered by this Agreement, per Contractor by craft, shall be hired through the special provisions above. Under this provision, name referrals begin with the eighth employee needed and continue on that same basis.

C. Notwithstanding Section 2(B), above, certified MWBE contractors for which participation goals are set forth in New York City Administrative Code §6-129, that are not signatory to any Schedule "A" CBAs, with subcontracts valued at or under two-million dollars (\$2,000,000), may request by name, and the Local will honor, referral of the second (2nd), fourth (4th), sixth (6th), and eighth (8th) Core Employee, who have applied to the Local for Program Work and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 365 calendar days prior to the contract award.

D. Where a certified MWBE Contractor voluntarily enters into a CBA with a BCTC Union, the employees of such Contractor at the time the CBA is executed shall be allowed to join the Union for the applicable trade subject to satisfying the Union's basic standards of proficiency for admission.

SECTION 3. NON-DISCRIMINATION IN REFERRALS

The Council represents that each Local Union hiring hall and referral system will be operated in a non-discriminatory manner and in full compliance with all applicable federal, state and local laws and regulations which require equal employment opportunities. Referrals shall not be affected in any way by the rules, regulations, bylaws, constitutional provisions or any other aspects or obligations of union membership, policies or requirements and shall be subject to such other conditions as are established in this Article. No employment applicant shall be discriminated

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

against by any referral system or hiring hall because of the applicant's union membership, or lack thereof.

SECTION 4. MINORITY, FEMALE, LOCAL AND SECTION 3 REFERRALS

In the event a Local Union either fails, or is unable to refer qualified minority or female applicants in percentages equaling the workforce participation goals adopted by the City and set forth in the Agency's (or, if applicable, Construction Manager's) bid specifications, within 48 hours of the request for same, the Contractor may employ qualified minority or female applicants from any other available source.

The Local Unions agree to prioritize the referral of Program Hires in accordance with Article 13 and to the extent consistent with the law, rules applicable to the union referral systems and joint apprentice programs. Those unions that do not currently provide for zip code preferences in their referral systems will undertake to implement such preferences consistent with this Agreement and their governing documents. Please see Exhibit "C" for a non-exhaustive list of eligible zip codes. Employees from these zip codes that are already on a contractor's workforce, including Core Employees, and referral of apprentices, in accordance with Article 13, Section 1(A) below, shall count towards the referral goals of this Section.

For any Program Work that may become subject to requirements under Section 3 of the Housing and Urban Development Act of 1968, as amended by the Housing and Community Development Act of 1992, and any rules, including new or revised rules, that may be published thereunder, the Local Unions acknowledge the Section 3 obligations of the Construction Manager or Contractor, as applicable, and agree to the zip code and NYCHA preferences described above to help implement this Article in a manner that would allow the Construction Manager or Contractor to meet its Section 3 obligations to the greatest extent feasible, and to post any required notices in the manner required by Section 3. The parties also acknowledge that the Construction Manager

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

and Contractor may also fulfill its Section 3 requirements on Program Work by promoting opportunities for excluded employees, as defined by Article 3, Section 3 of this Agreement, on Program Work and, to the extent permitted by Section 3, by promoting opportunities for craft and other employees on non-Program Work.

SECTION 5. CROSS AND QUALIFIED REFERRALS

The Local Unions shall not knowingly refer to a Contractor an employee then employed by another Contractor working under this Agreement. The Local Unions will exert their utmost efforts to recruit sufficient numbers of skilled and qualified crafts employees to fulfill the requirements of the Contractor.

SECTION 6. CRAFT FOREPERSONS AND GENERAL FOREPERSONS

The selection of craft forepersons and/or general forepersons and the number of forepersons required shall be solely the responsibility of the Contractor except where otherwise provided by specific provisions of an applicable Schedule "A" CBA, and provided that all craft forepersons shall be experienced and qualified journeypersons in their trade as determined by the appropriate Local Union. All forepersons shall take orders exclusively from the designated Contractor representatives. Craft forepersons shall be designated as working forepersons at the request of the Contractor, except when an existing local CBA prohibits a foreperson from working when the craft persons, they are leading exceed a specified number.

SECTION 7. ON CALL REPAIR REFERRALS

A. When an Agency awards a contract under this Agreement that requires the Contractor to have employees available on short notice to make time-sensitive repairs with such contract requiring the Contractor to respond within as little as two hours from the time the Contractor is contacted by the Agency ("On Call, Repair Contract"), the Contractor will, within ten (10) days of being awarded an On Call, Repair Contract subject to this Agreement, notify the

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

appropriate affiliated Union that would perform the work for a contractor that the Contractor has been awarded such a contract and immediately enter into good faith negotiations with such relevant affiliated Union to establish a procedure to receive time sensitive referrals from such affiliated Union(s).

B. In the event the Contractor and the relevant affiliated Union(s) are unable to negotiate a specific, mutually agreeable procedure for on call repair referral procedure within twenty (20) days of commencement of negotiations or prior to commencement of performance of the contract, whichever is earlier, the Contractor and the relevant affiliated Unions will follow the following procedure:

1. Upon notification by a Contractor that it has been awarded an On Call, Repair Contract pursuant to paragraph A above, each relevant affiliate Union shall provide the Contractor with the name and twenty-four (24) hour contact information of an On Call, Repair Contract contact person for urgent on call repair referrals.

2. The relevant affiliated Unions shall prepare a list of individuals eligible and prepared for referral on an immediate basis to respond to the on call repair contractor, which may include the affiliated Unions' service, repair and maintenance division workers where appropriate for repairs that can be made within 24 to 48 hours and paid at the appropriate prevailing wage rates for service and repair or maintenance work. Such list shall be provided to and in the possession of the designated-on call repair contact person for the affiliated Union and available for immediate reference.

3. Individuals on such list must be able to comply with the Contractor's response time pursuant to contract requirements.

4. The Union's On Call, Repair Contract contact person shall respond to a contractor's request for referrals within a reasonable time of the request so that compliance with

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

the contract shall be possible.

C. In the event that the Contractor makes a request for an on call referral that is compliant with this procedure and a Union is not able to respond to the request, that Union will be deemed to have waived the forty-eight (48) hour referral rule contained in Section 2 above and the Contractor may employ qualified applicants from any other available source that can meet contract requirements for that time-sensitive on call repair work only; provided, however, that any work related to the repair work that is not of a time sensitive nature under the contract shall comply with Section 2. If a Union fails to timely refer a worker and the Contractor employs other workers, the Contractor will e-mail the Agency within 72 hours and the Agency will forward that e-mail to the designated Labor Management Committee contacts.

ARTICLE 5 - UNION REPRESENTATION

SECTION 1. LOCAL UNION REPRESENTATIVE

Each Local Union representing on-site employees shall be entitled to designate in writing (copy to Contractor involved and Construction Manager) one representative, and/or the Business Manager, who shall be afforded access to the Program Worksite during such time as bargaining unit work is occurring and subject to otherwise applicable policies pertaining to visitors to the site.

SECTION 2. STEWARDS

A. Each affiliated Union shall have the sole discretion to designate any journey person as a Steward and an alternate Steward. The Union shall notify the Owner and/or Construction Manager as well as the Contractor of the identity of the designated Steward (and alternate) prior to the assumption of such duties. Stewards shall not exercise supervisory functions and will receive the regular rate of pay for their craft classifications. All Stewards shall be working Stewards.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

B. In addition to their work as an employee, the Steward shall have the right to receive complaints or grievances and to discuss and assist in their adjustment with the Contractor's appropriate supervisor. Each Steward shall be concerned with the employees of the Steward's trade and, if applicable, subcontractors of their Contractor, but not with the employees of any other trade Contractor. No Contractor shall discriminate against the Steward in the proper performance of Union duties.

C. The Stewards shall not have the right to determine when overtime shall be worked, or who shall work overtime except pursuant to a Schedule "A" CBA provision providing procedures for the equitable distribution of overtime.

SECTION 3. LAYOFF OF A STEWARD

Contractors agree to notify the appropriate Union 24 hours prior to the layoff of a Steward, except in cases of discipline or discharge for just cause. If a Steward is protected against layoff by a Schedule "A" provision, such provision shall be recognized to the extent the Steward possesses the necessary qualifications to perform the work required, except in cases of discipline or discharge for just cause. In any case in which a Steward is discharged or disciplined for just cause, the Local Union involved shall be notified immediately by the Contractor.

ARTICLE 6 - MANAGEMENT'S RIGHTS

SECTION 1. RESERVATION OF RIGHTS

Except as expressly limited by a specific provision of this Agreement, Contractors retain full and exclusive authority for the management of their operations including, but not limited to, the right to: direct the work force, including determination as to the number of employees to be hired and the qualifications therefore; the promotion, transfer, layoff of its employees; require compliance with the directives of the Agency including standard restrictions related to security and access to the site that are equally applicable to Agency employees, guests, or vendors; or the discipline or discharge for just cause of its employees; assign and schedule work; promulgate

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work; and, the requirement, timing and number of employees to be utilized for overtime work. No rules, customs, or practices which limit or restrict productivity or efficiency of the individual, as determined by the Contractor, Agency and/or Construction Manager and/or joint working efforts with other employees shall be permitted or observed.

SECTION 2. MATERIALS, METHODS & EQUIPMENT

There shall be no limitation or restriction upon the Contractor's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices. Contractors may, without restriction, install or use materials, supplies or equipment regardless of their source; provided, however, that where there is a Schedule "A" that includes a lawful union standards and practices clauses, then such clause as set forth in Schedule "A" agreements will be complied with, unless there is a lawful Agency specification (or specification issued by a Construction Manager which would be lawful if issued by the Agency directly) that would specifically limit or restrict the Contractor's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices, and which would prevent compliance with such Schedule "A" clause. The on-site installation or application of such items shall be performed by the craft having jurisdiction over such work; provided, however, it is recognized that other personnel having special qualifications may participate, in a supervisory capacity, in the installation, check-off or testing of specialized or

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

unusual equipment or facilities as designated by the Contractor. There shall be no restrictions as to work which is performed off-site for Program Work.

ARTICLE 7 - WORK STOPPAGES AND LOCKOUTS

SECTION 1. NO STRIKES-NO LOCK OUT

There shall be no strikes, sympathy strikes, picketing, work stoppages, slowdowns, hand billing, demonstrations or other similar disruptive activity at the Program Work site for any reason by any Union or employee against any Contractor or employer. There shall be no other Union or concerted or employee activity which disrupts or interferes with the operation of the Program Work or the objectives of the Agency at any Program Work site. In addition, failure of any Union or employee to cross any picket line established by any Union, signatory or non-signatory to this Agreement, or the picket or demonstration line of any other organization, at or in proximity to a Program Work site where the failure to cross disrupts or interferes with the operation of Program Work is a violation of this Article. Should any employees breach this provision, the Unions will use their best efforts to try to immediately end that breach and return all employees to work. There shall be no lockout at a Program Work site by any signatory Contractor, Agency or Construction Manager.

SECTION 2. DISCHARGE FOR VIOLATION

A Contractor may discharge any employee violating Section 1, above, and any such employee will not be eligible thereafter for referral under this Agreement for a period of 100 days.

SECTION 3. NOTIFICATION

If a Contractor contends that any Union has violated this Article, it will notify the Local Union involved advising of such fact, with copies of the notification to the Council. The Local Union shall instruct and order, the Council shall request, and each shall otherwise use their best efforts to cause, the employees (and where necessary the Council shall use its best efforts to cause the Local Union), to immediately cease and desist from any violation of this Article. If the Council

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

complies with these obligations, it shall not be liable for the unauthorized acts of a Local Union or its members. Similarly, a Local Union and its members will not be liable for any unauthorized acts of the Council. Failure of a Contractor or the Construction Manager to give any notification set forth in this Article shall not excuse any violation of Section 1 of this Article.

SECTION 4. EXPEDITED ARBITRATION

Any Contractor or Union alleging a violation of Section 1 of this Article may utilize the expedited procedure set forth below (in lieu of, or in addition to, any actions at law or equity that may be brought).

A. A party invoking this procedure shall notify J.J. Pierson or Richard Adelman; who shall alternate (beginning with Arbitrator J.J. Pierson) as Arbitrator under this expedited arbitration procedure. If the Arbitrator next on the list is not available to hear the matter within 24 hours of notice, the next Arbitrator on the list shall be called. Copies of such notification will be simultaneously sent to the alleged violator and Council.

B. The Arbitrator shall thereupon, after notice as to time and place to the Contractor, the Local Union involved, the Council and the Construction Manager, hold a hearing within 48 hours of receipt of the notice invoking the procedure if it is contended that the violation still exists. The hearing will not, however, be scheduled for less than 24 hours after the notice required by Section 3, above.

C. All notices pursuant to this Article may be provided by telephone, telegraph, hand delivery, or fax, confirmed by overnight delivery, to the Arbitrator, Contractor, Construction Manager and Local Union involved. The hearing may be held on any day including Saturdays or Sundays. The hearing shall be completed in one session, which shall not exceed 8 hours duration (no more than 4 hours being allowed to either side to present their case and conduct their cross examination) unless otherwise agreed. A failure of any Union or Contractor to attend the hearing

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

shall not delay the hearing of evidence by those present or the issuance of an award by the Arbitrator.

D. The sole issue at the hearing shall be whether a violation of Section 1, above, occurred. If a violation is found to have occurred, the Arbitrator shall issue a Cease and Desist Award restraining such violation and serve copies on the Contractor and Union involved. The Arbitrator shall have no authority to consider any matter in justification, explanation or mitigation of such violation or to award damages (any damages issue is reserved solely for court proceedings, if any). The Award shall be issued in writing within 3 hours after the close of the hearing and may be issued without an Opinion. If any involved party desires an Opinion, one shall be issued within 15 calendar days, but its issuance shall not delay compliance with, or enforcement of, the Award.

E. The Agency and Construction Manager (or such other designee of the Agency) may participate in full in all proceedings under this Article.

F. An Award issued under this procedure may be enforced by any court of competent jurisdiction upon the filing of this Agreement together with the Award. Notice of the filing of such enforcement proceedings shall be given to the Union or Contractor involved, and the Construction Manager.

G. Any rights created by statute or law governing arbitration proceedings which are inconsistent with the procedure set forth in this Article, or which interfere with compliance thereto, are hereby waived by the Contractors and Unions to whom they accrue.

H. The fees and expenses of the Arbitrator shall be equally divided between the involved Contractor and Union.

SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION

Procedures contained in Article 9 shall not be applicable to any alleged violation of this Article, with the single exception that an employee discharged for violation of Section 1, above,

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

may have recourse to the procedures of Article 9 to determine only if the employee did, in fact, violate the provisions of Section 1 of this Article; but not for the purpose of modifying the discipline imposed where a violation is found to have occurred.

ARTICLE 8 - LABOR MANAGEMENT COMMITTEE

SECTION 1. SUBJECTS

The Program Labor Management Committee (the "LMC") will meet on a regular basis to:

- 1) promote harmonious relations among the Contractors and Unions;
- 2) enhance safety awareness, cost effectiveness and productivity of construction operations;
- 3) protect the public interests;
- 4) discuss matters relating to staffing and scheduling with safety and productivity as considerations;
- and 5) review efforts to meet applicable participation goals for MWBEs and workforce participation goals for Program Hires, minority and female employees.

SECTION 2. COMPOSITION

The LMC shall be jointly chaired by a designee of the Agency and the President of the Council. It may include representatives of the Local Unions and Contractors involved in the issues being discussed. The parties shall mutually designate an MWBE representative to participate in appropriate Committee discussions. The Committee may conduct business through mutually agreed upon sub-committees.

ARTICLE 9 - GRIEVANCE & ARBITRATION PROCEDURE

SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES

Any question, dispute or claim arising out of, or involving the interpretation or application of this Agreement (other than jurisdictional disputes or alleged violations of Article 7, Section 1) shall be considered a grievance and shall be resolved pursuant to the exclusive procedure of the steps described below, provided, in all cases, that the question, dispute or claim arose during the term of this Agreement. Grievances shall include the City contract number and the Program Work

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

address; such information is posted at the work site if already commenced and is available in the City Record and Notice to Proceed for projects not already commenced.

Local Union grievances as to whether a scope of work is included or excluded from this Agreement shall be submitted to the LMC in the first instance rather than Step 1 below. To be timely, such notice must be given no later than five days prior to the bid opening date advertised in the City Record and bid documents for that contract, or any adjourned date publicly noticed if the grievance is challenging a determination by an Agency that the contract is not subject to this Agreement. Compliance with this limit shall operate as a statute of limitations and shall be a condition precedent to arbitration. For other grievances as to contractor and/or subcontractor scope of work issues, notice of such challenges shall be submitted to the LMC within 7 calendar days after the act, occurrence or event giving rise to the grievance. If the scope of work grievance is not resolved within 21 days of its submission to the LMC, then the grievance may proceed directly to Step 3 below.

Step 1:

(a) When any employee covered by this Agreement feels aggrieved by a claimed violation of this Agreement, the employee shall, through the Local Union business representative or job steward give notice of the claimed violation to the work site representative of the involved Contractor and the Construction Manager. To be timely, such notice of the grievance must be given within 7 calendar days after the act, occurrence or event giving rise to the grievance. The business representative of the Local Union or the job steward and the work site representative of the involved Contractor shall meet and endeavor to adjust the matter within 7 calendar days after timely notice has been given. If they fail to resolve the matter within the prescribed period, the grieving party, may, within 7 calendar days thereafter, pursue Step 2 of the grievance procedure by serving the involved Contractor with written copies of the grievance setting forth a description of the claimed

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

violation, the date on which the grievance occurred, and the provisions of the Agreement alleged to have been violated. Grievances and disputes settled at Step 1 are non-precedential except as to the specific Local Union, employee and Contractor directly involved unless the settlement is accepted in writing by the Construction Manager (or designee) as creating a precedent.

(b) Should any signatory to this Agreement have a dispute (excepting jurisdictional disputes or alleged violations of Article 7, Section 1) with any other signatory to this Agreement and, if after conferring, a settlement is not reached within 7 calendar days, the dispute shall be reduced to writing and proceed to Step 2 in the same manner as outlined in subparagraph (a) for the adjustment of employee grievances.

Step 2:

A Step 2 grievance shall be filed with the Agency, the BCTC, the Contractor, and, if the grievance is against a subcontractor, the subcontractor. The Business Manager or designee of the involved Local Union, together with representatives of the involved Contractor and/or a contractor association representative where appropriate, Council, the Construction Manager (or designee), and, if the grievance is against a subcontractor, the subcontractor, shall meet in Step 2 within 7 calendar days of service of the written grievance to arrive at a satisfactory settlement. The BCTC shall schedule the Step 2 meeting.

Step 3:

(a) If the grievance shall have been submitted but not resolved in Step 2, any of the participating Step 2 entities may, within 21 calendar days after the initial Step 2 meeting, submit the grievance in writing (copies to other participants, including the Construction Manager or designee) to the BCTC. In the event the matter is not resolved at Step 2, either J.J. Pierson or Richard Adelman, who shall act, alternately (beginning with Arbitrator J.J. Pierson), as the Arbitrator under this procedure, shall be designated at the Step 2 hearing and the BCTC will notify

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

the arbitrator of his designation. After such notification by the BCTC, the local demanding arbitration shall within a reasonable time request the arbitrator to schedule the matter for an arbitration hearing date. The Labor Arbitration Rules of the American Arbitration Association shall govern the conduct of the arbitration hearing, at which all Step 2 participants shall be parties. The decision of the Arbitrator shall be final and binding on the involved Contractor, Local Union and employees and the fees and expenses of such arbitrations shall be borne equally by the involved Contractor and Local Union.

(b) Failure of the grieving party to adhere to the time limits set forth in this Article shall render the grievance null and void. These time limits may be extended only by written consent of the Construction Manager (or designee), involved Contractor and involved Local Union at the particular step where the extension is agreed upon. The Arbitrator shall have authority to make decisions only on the issues presented to him and shall not have the authority to change, add to, delete or modify any provision of this Agreement.

SECTION 2. LIMITATION AS TO RETROACTIVITY

No arbitration decision or award, with the exception of those related to compliance with requirements to pay prevailing wages and supplements in accordance with federal or State law, may provide retroactivity of any kind exceeding 60 calendar days prior to the date of service of the written grievance on the Construction Manager and the involved Contractor or Local Union.

SECTION 3. PARTICIPATION BY AGENCY AND/OR CONSTRUCTION MANAGER

The Agency and Construction Manager (or such other designee of the Agency) shall be notified by the involved Contractor of all actions at Steps 2 and 3 and, at its election, may participate in full in all proceedings at these Steps, including Step 3 arbitration.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

ARTICLE 10 - JURISDICTIONAL DISPUTES

SECTION 1. NO DISRUPTIONS

There will be no strikes, sympathy strikes, work stoppages, slowdowns, picketing or other disruptive activity of any kind arising out of any jurisdictional dispute. Pending the resolution of the dispute, the work shall continue uninterrupted and as assigned by the Contractor. No jurisdictional dispute shall excuse a violation of Article 7.

SECTION 2. ASSIGNMENT

All Program Work assignments shall be made by the Contractor to unions affiliated with the BCTC consistent with the New York Plan for the Settlement of Jurisdictional Disputes (“New York Plan”) and its Greenbook decisions, if any. Where there are no applicable Greenbook decisions, assignments shall be made in accordance with the provisions of the New York Plan and local industry practice.

SECTION 3. NO INTERFERENCE WITH WORK

There shall be no interference or interruption of any kind with the Program Work while any jurisdictional dispute is being resolved. The work shall proceed as assigned by the Contractor until finally resolved under the applicable procedure of this Article. The award shall be confirmed in writing to the involved parties. There shall be no strike, work stoppage or interruption in protest of any such award.

ARTICLE 11 - WAGES AND BENEFITS

SECTION 1. CLASSIFICATION AND BASE HOURLY RATE

All employees covered by this Agreement shall be classified in accordance with the work performed and paid the hourly wage rates applicable for those classifications as required by the applicable prevailing wage laws.

SECTION 2. EMPLOYEE BENEFITS

A. The Contractors agree to pay on a timely basis contributions on behalf of all employees covered by this Agreement to those established jointly trustee employee benefit funds designated in the applicable CBA in Schedule "A" (in the appropriate Schedule "A" amounts), provided that such benefits are required to be paid on public works under any applicable prevailing wage law. Bona fide jointly trustee fringe benefit plans established or negotiated through collective bargaining during the life of this Agreement may be added if similarly required under applicable prevailing wage law. Contractors, not otherwise contractually bound to do so, shall not be required to contribute to benefits, trusts or plans of any kind which are not required by the prevailing wage law provided, however, that this provision does not relieve Contractors signatory to local collective bargaining agreement with any affiliated union from complying with the fringe benefit requirements for all funds contained in the CBA. Furthermore, employees that may remain unaffiliated with any local union at the completion of their employment under the terms of this Agreement may apply for any distributions to which they may be entitled from the funds in accordance with the applicable rules and governing documents of the unions and the employee benefit funds that they have participated in under the terms of this Agreement.

B. 1. Notwithstanding Section 2 (A) above, and subject to 2 (B)(2) below, Contractors who designate Core Employees pursuant to Article 4, Section 2 (B) and (C) that are not signatory to a Schedule "A" agreement and who maintain bona fide private benefit plans that satisfy the requirements of Section 220 of the New York State Labor Law, may satisfy the above benefit obligation with respect to those employees by providing those employees with coverage under their private benefit plans (to the extent consistent with Section 220). The total benefit payments to be made on behalf of each such employee must be equal to the total Section 220 supplement amount and any shortfall must be paid by cash supplement to the employee.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

2. A contractor that will satisfy its Section 220 obligations in accordance with subsection 2(B)(1) above shall make available to the Agency at the time of contract award a complete set of plan documents for each non-Schedule “A” benefit plan into which contributions will be made and/or coverage provided pursuant to the provisions of Section 2(B)(1) above. The Contractor shall also provide certification from a certified public accountant as to the annualized hourly value of such benefits consistent with the requirements of Section 220.

3. The City shall verify that the alternate benefit plan(s), together with any cash supplement to the employee, is compliant with Section 220 prior to awarding the Contractor a contract covered by this Agreement. In the event the Contractor’s alternate benefit plan(s), together with any cash supplement to the employee, is determined to be compliant with Section 220 and will be utilized by the Contractor on behalf of Article 4, Section 2(B) and (C) Core Employees, the Local Unions have no duty to enforce the Contractor’s obligations on the alternate benefit plan(s) as they are not party to the alternate plan(s) or privy to the terms and conditions of the plan obligations. In the event the City determines the alternate benefit plan(s), together with any cash supplement to the employee, is not compliant with Section 220, the Contractor may, upon executing a Letter of Assent, satisfy its obligations for all employees, including Core Employees, by contributing to the Schedule “A” benefit plans in accordance with the terms of the Schedule “A” agreements.

C. The Contractors agree to be bound by the written terms of the legally established jointly trusted Trust Agreements specifying the detailed basis on which payments are to be paid into, and benefits paid out of, such Trust Funds but only with regard to Program Work done under this Agreement and only for those employees to whom this Agreement requires such benefit payments.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

D. 1. To the extent consistent with New York City's Procurement Policy Board Rules with respect to prompt payment, as published at www.nyc.gov/ppb, §4-06(e), and in consideration of the unions' waiver of their rights to withhold labor from a contractor or subcontractor delinquent in the payment of fringe benefits contributions ("Delinquent Contractor"); the Agency agrees that where any such union and/or fringe benefit fund shall notify the Agency, the General Contractor, and the Delinquent Contractor in writing with back-up documentation that the Delinquent Contractor has failed to make fringe benefit contributions to it as provided herein and the Delinquent Contractor shall fail, within ten (10) calendar days after receipt of such notice, to furnish either proof of such payment or notice that the amount claimed by the union and/or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by the Delinquent Contractor which the union or fringe benefit fund claims to be due it, and shall remit the amount when and so withheld to the fringe benefit fund and deduct such payment from the amounts then otherwise due and payable to the General Contractor, which payment shall, as between the General Contractor and the Agency, be deemed a payment by the Agency to the General Contractor; provided however, that in any month, such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. The union or its employee benefit funds shall include in its notification of delinquent payment of fringe benefits only such amount it asserts the Delinquent Contractor failed to pay on the specific project against which the claim is made and the union or its employee benefit funds may not include in such notification any amount such Delinquent Contractor may have failed to pay on any other City or non-City project.

2. In addition, where a union or employee benefit fund gives notice to the City that a Contractor is Delinquent as defined in subsection 2(D)(1) above and the City determines that the

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

notice includes appropriate back-up documentation that the Contractor is delinquent, the City will promptly, but not later than twenty (20) days after receipt of the notice, provide a copy of said notice to City Agencies. In the event the City determines there is insufficient back-up documentation, it will notify the appropriate union and/or fringe benefit fund promptly, but not later than twenty (20) days after receipt of the Delinquency Notice, and shall include notice of what additional documentation is requested. Any determination by the City that there is insufficient back-up must be reasonable. This provision is intended to enhance compliance with the prevailing wage law and this Agreement with respect to the payment of fringe benefits and is not intended as a substitute for the resolution of a disputed claim pursuant to any applicable law or agreement.

The City and the relevant Agency(s) will thereafter require the Delinquent Contractor to provide cancelled checks or other equivalent proof of payment of benefit contributions that have come due, to be submitted with certified payroll reports for all Program Work covered by this Agreement on which the Delinquent Contractor is engaged, for at least a one-year period or such earlier period if the Contractor is ultimately determined not to be a Delinquent Contractor. Such proof of payment when required is a condition of payment of the Delinquent Contractor's invoices by any entity, including, but not limited to, the City, the relevant Agency(s), Construction Manager, General Contractor, the prime or higher level subcontractor, as is appropriate under the Delinquent Contractor's engagement. The union and the funds shall upon request receive copies of the certified payrolls, cancelled checks, or other proof of payment from the City and/or the relevant Agency(s).

E. In the event the General Contractor or Delinquent Contractor shall notify the Agency as above provided that the claim of the union or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by the Delinquent Contractor that the union and/or fringe benefit fund claims

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

to be due it, pending resolution of the dispute pursuant to the union's Schedule "A" agreement, and the amount shall be paid to the party or parties ultimately determined to be entitled thereto, or held until the Delinquent Contractor and union or employee benefit fund shall otherwise agree as to the disposition thereof; provided however, that such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. In the event the Agency shall be required to withhold amounts from a General Contractor for the benefit of more than one fringe benefit fund, the amounts so withheld in the manner and amount prescribed above shall be applied to or for such fund in the order in which the written notices of nonpayment have been received by the Agency, and if more than one such notice was received on the same day, proportionately based upon the amount of the union and/or fringe benefit fund claims received on such day. Nothing herein contained shall prevent the Agency from commencing an interpleader action to determine entitlement to a disputed payment in accordance with section one thousand six of the civil practice law and rules or any successor provision thereto.

F. Payment to a fringe benefit fund under this provision shall not relieve the General Contractor or Delinquent Contractor from responsibility for the work covered by the payment. Except as otherwise provided, nothing contained herein shall create any obligation on the part of the Agency to pay any union or fringe benefit fund, nor shall anything provided herein serve to create any relationship in contract or otherwise, implied or expressed, between the union/fund and/or fringe benefit and the Agency.

ARTICLE 12 - HOURS OF WORK, PREMIUM PAYMENTS, SHIFTS AND HOLIDAYS

SECTION 1. WORK WEEK AND WORKDAY

A. The standard work week shall consist of 40 hours of work at straight time rates, Monday through Friday, 8 hours per day, plus ½ hour unpaid lunch period. The standard work week may be reduced to 35 or 37 ½ hours of work at straight time rates, Monday to Friday, 7 or 7

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

½ hours per day, plus ½ hour unpaid lunch period in those limited circumstances where the City states in the bid documents that the Contractor will not be given access to the site to accommodate an 8 hour day. The 8 hour, 7 ½ hour or 7-hour workday must be established at the commencement of the project and may not be altered by the Contractor.

B. In accordance with project needs, there shall be flexible start times with advance notice from Contractor to the Union. The Day Shift shall commence between the hours of 6:00 a.m. and 9:00 a.m. and shall end between the hours of 2:30 p.m. and 5:30 p.m., for an 8-hour day, and up to 7:30 p.m. for a 10-hour day. The Evening Shift shall commence between the hours of 3:00 p.m. and 6:00 p.m., unless different times are necessitated by the Agency's phasing plans on specific projects. The Night Shift shall commence between the hours of 11:00 p.m. and 2:00 a.m., unless different times are necessitated by the Agency's phasing plans on specific projects. Subject to the foregoing, starting and quitting times shall occur at the Program Work site designated by the Contractor.

C. Scheduling - Except as provided above, Monday through Friday is the standard work week; 8 hours of work plus ½ hour unpaid lunch. Notwithstanding any other provision of this Agreement, a Contractor may schedule a four-day work week, 10 hours per day ("4/10") at straight time rates, plus a ½ hour unpaid lunch, at the commencement of the job.

D. Notice - Contractors shall provide not less than 5 days prior notice to the Local Union involved as to the work week and work hour schedules to be worked or such lesser notice as may be mutually agreed upon.

SECTION 2. OVERTIME

Overtime shall be paid for any work (i) over an employee's regularly scheduled work day, i.e., work over eight (8) hours in a day where 5/8s is scheduled, work over ten (10) hours in a day where 4/10s is scheduled, or work over seven (7) or seven and one half (7½) hours where such

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

hours are scheduled pursuant to Article 12, section 1(A) and (ii) over forty (40) hours in a week, or over thirty five (35) or thirty seven and one-half (37 ½) where such hours are scheduled pursuant to Article 12, section 1(A). Overtime shall be paid at time and one half (1½) Monday through Saturday. All overtime work performed on Sunday and Holidays will be paid pursuant to the applicable Schedule "A". There shall be no stacking or pyramiding of overtime pay under any circumstances. There will be no restriction upon the Contractor's scheduling of overtime or the nondiscriminatory designation of employees who shall be worked, including the use of employees, other than those who have worked the regular or scheduled work week, at straight time rates. The Contractor shall have the right to schedule work so as to minimize overtime or schedule overtime as to some, but not all, of the crafts and whether or not of a continuous nature.

SECTION 3. SHIFTS

A. Flexible Schedules - Scheduling of shift work, including Saturday and Sunday work, shall be within the discretion of the Contractor in order to meet Program Work schedules and existing Program Work conditions including the minimization of interference with the mission of the Agency. It is not necessary to work a day shift in order to schedule a second or third shift, or a second shift in order to schedule a third shift, or to schedule all of the crafts when only certain crafts or employees are needed. Shifts must have prior approval of the Agency or Construction Manager and must be scheduled with not less than five workdays' notice to the Local Union or such lesser notice as may be mutually agreed upon.

B. Second and/or Third Shifts - The second shift shall start between 3 p.m. and 6 p.m. and the third shift shall start between 10 p.m. and 2 a.m., subject to different times necessitated by the Agency phasing plans on specific projects. There shall be no reduction in shift hour work. With respect to second and third shift work there shall be a 5% shift premium, or the rate required by the applicable prevailing wage laws, whichever is less. No other premium or other payments for such

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

work shall be required unless such work is in excess of the employee's regularly scheduled work week, i.e., forty (40) hours in the week or thirty five (35) or thirty seven and one half (37 ½) pursuant to Article 12, Section 1(A). All employees within the same classification performing Program Work will be paid at the same wage rate regardless of the shift or work, subject only to the foregoing provisions.

C. Flexible Starting Times - Shift starting times will be adjusted by the Contractor as necessary to fulfill Program Work requirements subject to the notice requirements of paragraph A.

SECTION 4. HOLIDAYS

A. Schedule - There shall be nine (9) recognized holidays on the project:

New Year's Day

Martin Luther King Day President's Day

Memorial Day Veteran's Day

Labor Day Thanksgiving Day

Independence Day Christmas Day

All said holidays shall be observed on the calendar date except those holidays which occur on Saturday shall be observed on the previous Friday and those that occur on Sunday shall be observed on the following Monday.

B. Payment - Regular holiday pay, if any, for work performed on such a PLA recognized holiday shall be in accordance with the applicable Schedule "A" for work performed on a holiday, even where the PLA holiday differs from the CBA holidays.

C. Exclusivity - No holidays other than those listed in Section 4(A) above shall be recognized or observed.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SECTION 5. MAKE-UP DAYS

When severe weather, power failure, fire or natural disaster or other similar circumstances beyond the control of the Contractor prevent work from being performed on a regularly scheduled weekday, the Contractor may schedule a Saturday make-up day (or Friday make-up day in the case of a 4/10 schedule) and such time shall be scheduled and paid as if performed on a weekday. Any other Saturday work shall be paid at time and one-half (1½). The Contractor shall notify the Local Union on the missed day or as soon thereafter as practicable if such a make-up day is to be worked.

SECTION 6. REPORTING PAY

A. Employees who report to the work location pursuant to their regular schedule and who are not provided with work shall be paid two hours reporting pay at straight time rates. An employee whose work is terminated early by a Contractor due to severe weather, power failure, fire or natural disaster or for similar circumstances beyond the Contractor's control, shall receive pay only for such time as is actually worked. In other instances, in which an employee's work is terminated early (unless provided otherwise elsewhere in this Agreement), the employee shall be paid for their full shift. Contractors shall not be permitted to call, text or email or voicemail employees in advance of their regularly scheduled shift starting time to avoid reporting pay. Notwithstanding the above, in the event that the National Weather Service issues a weather advisory for the area in which the work location is situated, and the entire project is shut down as a result of the Weather Advisory, the Contractor shall be permitted to speak to employees no less than four (4) hours in advance of their shift starting time, unless the Local Union consents to a shorter notice in writing, to advise them not to report to work due to the National Weather Service advisory, and employees who are so notified shall not receive two (2) hours reporting pay if they report to the work location. The Contractor shall make every effort to notify each employee directly and confirm that notification has been received. Voice, text, and email messages left for employees without

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

confirmation of delivery and receipt by employee do not constitute sufficient notice under this provision.

B. When an employee, who has completed their scheduled shift and left the Program Work site, is “called out” to perform special work of a casual, incidental or irregular nature, the employee shall receive overtime pay at the rate of time and one-half of the employee’s straight time rate for hours actually worked.

C. When an employee leaves the job or work location of their own volition or is discharged for cause or is not working as a result of the Contractor’s invocation of Section 7 below, they shall be paid only for the actual time worked.

D. Except as specifically set forth in this Article there shall be no premiums, bonuses, hazardous duty, high time or other special premium payments or reduction in shift hours of any kind.

E. There shall be no pay for time not actually worked except as specifically set forth in this Article and except where an applicable Schedule “A” requires a full weeks’ pay for forepersons.

SECTION 7. PAYMENT OF WAGES

A. Termination - Employees who are laid off or discharged for cause shall be paid in full for that which is due them at the time of termination. The Contractor shall also provide the employee with a written statement setting forth the date of lay off or discharge.

SECTION 8. EMERGENCY WORK SUSPENSION

A Contractor may, if considered necessary for the protection of life and/or safety of employees or others, suspend all or a portion of Program Work. In such instances, employees will be paid for actual time worked, except that when a Contractor requests that employees remain at the job site available for work, employees will be paid for that time at their hourly rate of pay.

SECTION 9. INJURY/DISABILITY

An employee who, after commencing work, suffers a work-related injury or disability while performing work duties, shall receive no less than a full day's pay in accordance with the employee's regularly scheduled workday under Article 12, Section (1)(A). Further, the employee shall be rehired at such time as able to return to duties provided there is still Program Work available for which the employee is qualified and able to perform.

SECTION 10. TIME KEEPING

A Contractor may utilize systems to check employees in and out. Each employee must check in and out and sign a daily sign-in sheet, or other attendance methodology approved in writing by the Agency(s). The Contractor will provide adequate facilities for checking in and out in an expeditious manner.

SECTION 11. MEAL PERIOD

A Contractor shall schedule an unpaid period of not more than 1/2-hour duration at the work location between the 3rd and 5th hour of the scheduled shift. A Contractor may, for efficiency of operation, establish a schedule which coordinates the meal periods of two or more crafts, or which provides for staggered lunch periods within a craft or trade. If an employee is required to work through the meal period, the employee shall be compensated in a manner established in the applicable Schedule "A".

SECTION 12. BREAK PERIODS

There will be no rest periods, organized coffee breaks or other non-working time established during working hours. Individual coffee containers will be permitted at the employee's work location. Where 4/10s are being worked there shall be a morning and an afternoon coffee break.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

ARTICLE 13 - APPRENTICES AND WORKFORCE DEVELOPMENT

SECTION 1. APPRENTICE RATIOS AND REFERRALS

A. Recognizing the need to maintain continuing supportive programs designed to develop adequate numbers of competent workers in the construction industry and to provide craft entry opportunities for minorities, women and economically disadvantaged non-minority males, Contractors will employ apprentices in their respective crafts to perform such work as is within their capabilities and which is customarily performed by the craft in which they are indentured. Contractors may utilize apprentices and such other appropriate classifications in the maximum ratio permitted by the New York State Department of Labor (“NYS DOL”) or the maximum allowed per trade. Apprentices and such other classifications as are appropriate shall be employed in a manner consistent with the provisions of the appropriate Schedule “A” agreement. The parties encourage, as an appropriate source of apprentice recruitment consistent with the rules and operations of the affiliated unions’ apprentice-programs, the use of the Edward J. Malloy Initiative for Construction Skills, Non-Traditional Employment for Women, New York Helmets to Hardhats, and Pathways to Apprenticeship (P2A). Should a Contractor request that apprentices be provided for Program Work, the referring Local Union shall comply with that request so long as it is consistent with the maximum ratios permitted by NYSDOL.

SECTION 2. WORKFORCE DEVELOPMENT

A. The parties to this Agreement recognize the mutual interest in increasing training and career opportunities for Program Hires. The parties are committed to (i) increasing opportunities for Program Hires in these zip codes in pre-apprenticeship and apprenticeship programs, and (ii) using the work opportunities provided by this Agreement to increase the career opportunities for qualified Program Hires, and (iii) to assure the continued availability of a skilled and qualified, readily available construction workforce for this program and future work. The parties agree to the Workforce Development Program set forth in Exhibit “D”.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

B. Specifically, the parties have established an initiative entitled HireNYC Construction Careers, which is an initiative to advance career opportunities for Program Hires.

C. The HireNYC Construction Careers initiative will work with the Mayor's Office of Workforce Development ("WKDEV") and its Workforce1 Centers to recruit Program Hires interested in employment in the construction industry.

D. HireNYC Construction Careers intends to capitalize on the work opportunities presented by this Agreement to create a pathway to career opportunities in the construction workforce. To this end the HireNYC Construction Careers initiative includes a workforce goal of at least 30% of all hours worked under this Agreement, including by subcontractors pursuant to Article 3, Section 1(B)(12), to be worked by workers residing within the specified zip codes or NYCHA housing. In order to encourage recruitment of new workers, HireNYC Construction Careers has established a goal that at least 30% of all of those hours are to be worked by apprentices from those zip codes or NYCHA housing.

E. The Contractors and Unions agree to cooperate and participate in the implementation of HireNYC Construction Careers to assist Program Hires with educational and training opportunities related to access to pre-apprenticeship, apprenticeship, and project work as set forth in this Agreement.

F. Reporting Requirements:

i. The Contractors shall report the residence zip code information on all certified payroll reports.

ii. The Local Unions, their referral systems, the affiliated pre-apprentice programs, and Contractors shall cooperate with any protocol developed for monitoring the HireNYC Construction Careers initiative.

iii. The Local Unions shall provide the WKDEV copies of the following

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

reports when such reports are submitted to NYSDOL: *Apprentice Training Recruitment Notification and Minimum Qualifications (AT 505)*, *Apprentice Training Program Affirmative Action Plan (AT 603)*, *Apprenticeship Agreement (AT 401)*, or such alternate reporting system as the parties may negotiate during the term of this Agreement.

G. The City and BCTC agree that no less than annually, the LMC shall review the implementation of HireNYC Construction Careers, as well as Program Hire opportunities afforded as a result of the initiative. The City and BCTC will collaborate to develop monitoring protocol for the purpose of measuring the success of HireNYC Construction Careers. The City and BCTC may, on mutual consent, modify the goals, procedures and protocols, as necessary to afford continued opportunity to Program Hires.

H. To facilitate the commitments set forth in this Agreement, each Local Union shall designate a HireNYC Construction Careers lead representative to work in partnership with WKDEV to implement these workforce and apprenticeship provisions within the union and across City construction contracts.

ARTICLE 14 - SAFETY PROTECTION OF PERSON AND PROPERTY

SECTION 1. SAFETY REQUIREMENTS

Each Contractor will ensure that applicable OSHA and safety requirements are at all times maintained on the Program Work site and the employees and Unions agree to cooperate fully with these efforts to the extent consistent with their rights and obligations under the law. Employees will cooperate with employer safety policies and will perform their work at all times in a safe manner and protect themselves and the property of the Contractor and Agency from injury or harm, to the extent consistent with their rights and obligations under the law. Failure to do so will be grounds for discipline, including discharge. The Construction Manager and/or Contractor may

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

adopt, and the Unions shall agree to, the Drug and Alcohol Testing Policy attached as Schedule “B”.

SECTION 2. CONTRACTOR RULES

Employees covered by this Agreement shall at all times be bound by the reasonable safety, security, and visitor rules as established by the Contractors and the Construction Manager for Program Work. Such rules will be published and posted in conspicuous places throughout the Program Work sites. Any site security and access policies established by the Construction Manager or General Contractor intended for specific application to the construction workforce for Program Work and that are not established pursuant to an Agency directive shall be implemented only after notice to the BCTC and its affiliates and an opportunity for negotiation and resolution by the Labor Management Committee.

SECTION 3. INSPECTIONS

The Contractors and Construction Manager retain the right to inspect incoming shipments of equipment, apparatus, machinery and construction materials of every kind.

ARTICLE 15 - TEMPORARY SERVICES

SECTION 1.

Temporary services, i.e. all temporary heat, climate control, water, power and light, shall only be required upon the determination of the Agency or Construction Manager, and when used shall be staffed and assigned to the appropriate trade(s) with jurisdiction. Temporary services shall be provided by the appropriate Contractors’ existing employees during working hours in which a shift is scheduled for employees of the Contractor. The Agency or Construction Manager may determine the need for temporary services requirements during non-working hours, and when used shall be staffed and assigned to the appropriate trades(s), and which may be limited to one person per applicable trade where practicable. There shall be no stacking of trades on temporary services,

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

provided this does not constitute a waiver of primary trade jurisdiction. In the event a temporary system component is claimed by multiple trades, the matter shall be resolved through the New York Plan for Jurisdictional Disputes.

ARTICLE 16 - NO DISCRIMINATION

SECTION 1. COOPERATIVE EFFORTS

The Contractors and Unions agree that they will not discriminate against any employee or applicant for employment because of creed, race, color, religion, sex, sexual orientation, national origin, marital status, citizenship status, disability, gender identity, age or any other status provided by law, in any manner prohibited by law or regulation.

SECTION 2. LANGUAGE OF AGREEMENT

Any words signifying any gender shall be interpreted to mean any or all gender identities.

ARTICLE 17 - GENERAL TERMS

SECTION 1. PROJECT RULES

A. The Construction Manager and the Contractors shall establish such reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work. These rules will be explained at the pre-job conference and posted at the Program Work sites and may be amended thereafter as necessary. Notice of amendments will be provided to the appropriate Local Union. Failure of an employee to observe these rules and regulations shall be grounds for discipline, including discharge. The fact that no order was posted prohibiting a certain type of misconduct shall not be a defense to an employee disciplined or discharged for such misconduct when the action taken is for cause.

B. The parties adopt and incorporate the BCTC's Standards of Excellence as annexed hereto as Exhibit "B".

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SECTION 2. TOOLS OF THE TRADE

The welding/cutting torch and chain fall are tools of the trade having jurisdiction over the work performed. Employees using these tools shall perform any of the work of the trade. There shall be no restrictions on the emergency use of any tools or equipment by any qualified employee or on the use of any tools or equipment for the performance of work within the employee's jurisdiction.

SECTION 3. SUPERVISION

Employees shall work under the supervision of the craft foreperson or general foreperson.

SECTION 4. TRAVEL ALLOWANCES

There shall be no payments for travel expenses, travel time, subsistence allowance or other such reimbursements or special pay except as expressly set forth in this Agreement.

SECTION 5. FULL WORKDAY

Employees shall be at their work area at the starting time established by the Contractor, provided they are provided access to the work area. The signatories reaffirm their policy of a fair day's work for a fair day's wage.

SECTION 6. COOPERATION AND WAIVER

The Construction Manager, Contractors and the Unions will cooperate in seeking any NYSDOL, or any other government, approvals that may be needed for implementation of any terms of this Agreement. In addition, the Council, on their own behalf and on behalf of its participating affiliated Local Unions and their individual members, intend the provisions of this Agreement to control to the greatest extent permitted by law, notwithstanding contrary provisions of any applicable prevailing wage, or other, law and intend this Agreement to constitute a waiver of any such prevailing wage, or other, law to the greatest extent permissible only for work within the scope of this Agreement, including specifically, but not limited to those provisions relating to shift, night,

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

and similar differentials and premiums. This Agreement does not, however, constitute a waiver or modification of the prevailing wage schedules applicable to work not covered by this Agreement.

ARTICLE 18 - SAVINGS AND SEPARABILITY

SECTION 1. THIS AGREEMENT

In the event that the application of any provision of this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, or if such application may cause the loss of project funding or any New York State Labor Law exemption for all or any part of the Program Work, the provision or provisions involved (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the remainder of the Agreement shall remain in full force and effect to the extent allowed by law (and to the extent no funding or exemption is lost), unless the part or parts so found to be in violation of law or to cause such loss are wholly inseparable from the remaining portions of the Agreement and/or are material to the purposes of the Agreement. In the event a court of competent jurisdiction finds any portion of the Agreement to trigger the foregoing, the parties will immediately enter into negotiations concerning the substance affected by such decision for the purpose of achieving conformity with the court determination and the intent of the parties hereto for contracts to be let in the future.

SECTION 2. THE BID SPECIFICATIONS

In the event that the Agency's (or Construction Manager's) bid specifications, or other action, requiring that a successful bidder (and subcontractor) become signatory to this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, or may cause the loss of project funding or any New York State Labor Law exemption for all or any part of the Program Work, such requirement (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the Agreement shall remain in full force and effect to the extent allowed

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

by law and to the extent no funding or exemption is lost. In such event, the Agreement shall remain in effect for contracts already bid and awarded or in construction only where the Agency and Contractor voluntarily accepts the Agreement. The parties will enter into negotiations as to modifications to the Agreement to reflect the court or other action taken and the intent of the parties for contracts to be let in the future.

SECTION 3. NON-LIABILITY

In the event of an occurrence referenced in Section 1 or Section 2 of this Article, neither the Agency, the Construction Manager, any Contractor, nor any Union shall be liable, directly or indirectly, for any action taken, or not taken, to comply with any court order or injunction, other determination, or in order to maintain funding or a New York State Labor Law exemption for Program Work. Bid specifications will be issued in conformance with court orders then in effect and no retroactive payments or other action will be required if the original court determination is ultimately reversed.

SECTION 4. NON-WAIVER

Nothing in this Article shall be construed as waiving the prohibitions of Article 7 as to signatory Contractors and signatory Unions.

ARTICLE 19 - FUTURE CHANGES IN SCHEDULE "A" AREA CONTRACTS

SECTION 1. CHANGES TO AREA CONTRACTS

A. Schedule "A" to this Agreement shall continue in full force and effect until the Contractor and/or Union parties to the Area CBAs that are the basis for the Schedule "A" notify the Mayor's Office of Contract Services ("MOCS"), Agency and Construction Manager in writing by providing a copy of the updated CBA(s) incorporating the changes agreed to in that Area CBA which are applicable to work covered by this Agreement and their effective dates.

B. It is agreed that any provisions negotiated into Schedule "A" CBAs will not apply to work under this Agreement if such provisions are less favorable to those uniformly required of

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

contractors for construction work normally covered by those agreements; nor shall any provision be recognized or applied on Program Work if it may be construed to apply exclusively, or predominantly, to work covered by this Agreement.

C. Any disagreement between signatories to this Agreement over the incorporation into Schedule "A" of provisions agreed upon in the renegotiation of Area CBAs shall be resolved in accordance with the procedure set forth in Article 9 of this Agreement.

SECTION 2. LABOR DISPUTES DURING AREA CONTRACT NEGOTIATIONS

The Unions agree that there will be no strikes, work stoppages, sympathy actions, picketing, slowdowns or other disruptive activity or other violations of Article 7 affecting the Program Work by any Local Union involved in the renegotiation of Area Local CBAs nor shall there be any lock-out on such Program Work affecting a Local Union during the course of such renegotiations.

ARTICLE 20 - WORKERS' COMPENSATION ADR

SECTION 1.

An Alternative Dispute Resolution ("ADR") program may be negotiated and participation in the ADR program will be optional by trade.

ARTICLE 21 - HELMETS TO HARDHATS

SECTION 1.

The Contractors and the Unions recognize a desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction industry. The Contractors and Unions agree to utilize the services of the New York City Helmets to Hardhats Program ("H2H") to serve as a resource for preliminary orientation, assessment of construction aptitude, referral to apprenticeship programs or hiring halls, counseling and mentoring, support network, employment opportunities and other needs as identified by the parties.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SECTION 2.

The Unions and Contractors agree to coordinate with H2H to create and maintain an integrated database of veterans interested in working on this project and of apprenticeship and employment opportunities for this project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

IN WITNESS WHEREOF the parties have caused this Agreement to be executed and effective as
of the ___ day of _____, _____.

FOR BUILDING AND CONSTRUCTION TRADES COUNCIL
OF GREATER NEW YORK AND VICINITY

BY: *Gary LaBarbera*
Gary LaBarbera
President

FOR NEW YORK CITY

BY: *D. Fuleihan*
Dean Fuleihan
First Deputy Mayor

APPROVED AS TO FORM:

Steve Stein Auster
ACTING CORPORATION COUNSEL
NEW YORK CITY

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

LIST OF SIGNATORY UNIONS

International Brotherhood of Boilermakers, Iron Ship Builders, Blacksmiths, Forgers and Helpers, AFL-CIO, Local Lodge No.5
Bricklayers and Allied Craftworkers, Local Union No. 1
Building Concrete & Excavating Laborers, Local Union No. 731
N.Y.C. and Vicinity District Council of Carpenters
Cement Masons, Local Union No. 780
Concrete Workers District Council No. 16
Asbestos, Lead & Hazardous Waste, Laborers Local Union No. 78
Construction & General Building Laborers Local Union No. 79
Derrickmen and Riggers Local Union No. 197
International Brotherhood of Electrical Workers, Local Union No. 3
International Union of Elevator Constructors, Local Union No. 1
Heat & Frost Insulators & Allied Workers, Local Union No. 12
Heat & Frost Insulators & Allied Workers, Local Union No. 12A
Pavers & Road Builders, Laborers Local Union No. 1010
New York State Iron Workers District Council
Structural Iron Workers, Local Union No. 40
Structural Iron Workers, Local Union No. 361
Mason Tenders District Council
Metallic Lathers & Reinforcing Ironworkers, Local No. 46
Ornamental Iron Workers, Local Union No. 580
Glaziers No. 1087, District Council 9
Painters, District Council No. 9
Metal Polishers, Local Union No. 8A-28A; District Council No. 9
Drywall Tapers Local Union No 1974, District Council 9
Bridge & Structural Steel Painters, Local Union No. 806, District Council 9
Operative Plasterers Local Union No. 262
UA Plumbers Local Union No. 1
Private Sanitation, Teamsters Local Union No. 813
Roofers & Waterproofers, Local Union No. 8
Sheet Metal Workers, Local Union No. 28
Sheet Metal Workers, Local Union No. 137
UA Steamfitters, Local Union No. 638
Teamsters, Local Union No. 282
Tile, Marble & Terrazzo, B.A.C. Local Union No. 7

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

SCHEDULE "A" - CBAs

Union	Current Agreement w/
Architectural and Ornamental Iron Workers Local Union 580, AFL-CIO	Allied Building Metal Industries, Inc.
Building, Concrete, Excavating & Common Laborers Local 731	Independent
Building, Concrete, Excavating & Common Laborers Local 731	Members of the General Contractors Association of New York, Inc.
Bricklayers Local 1 of the International Union of Bricklayers and Allied Craftworkers	Independent
District Council No. 9, I.U.P.A.T Glaziers Local 1087	Window and Plate Glass Dealers Association
Drywall Tapers and Painters Local 1974, affiliated with International Union of Painters & Allied Trades and Drywall Taping Contractor's Association & Association of Wall-Ceiling & Carpentry Industries NY, Inc.	Independent
Enterprise Association of Steamfitters and Apprentices Local 638	Mechanical Contractors Association of NY, Inc.
Enterprise Association of Steamfitters and Apprentices Local 638	Independent
Elevator Constructors Local 1 of NY and NJ	ThyssenKrupp Elevator Corporation
Elevator Constructors Local 1 of NY and NJ	Independent
Highway Road and Street Laborers Local Union 1010 of the District Council of Pavers and Road Builders of the Laborers' International Union of North America AFL-CIO	Independent
Highway Road and Street Laborers Local Union 1010 of the District Council of Pavers and Road Builders of the Laborers' International Union of North America AFL-CIO	Member of the General Contractors Association of New York, Inc.
International Association of Heat and Frost Insulators and Allied Workers Local No. 12 of New York City	Independent
International Association of Heat and Frost Insulators and Allied Workers Local No. 12 of New York City	The Insulation Contractors Association of New York City, Inc.
International Association of Heat and Frost Insulators and Allied Workers Local No. 12A of New York City	Independent

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

International Association of Heat and Frost Insulators and Allied Workers Local No. 12A of New York City	Environmental Contractors Association, Inc.
International Brotherhood of Boilermakers, Iron Ship Builders, Blacksmiths, Forgers and Helpers, AFL-CIO, Local Lodge No. 5	Boilermakers Association of Greater New York
Local Union No. 3 International Brotherhood of Electrical Workers, AFL-CIO	New York Electrical Contractors Association
International Brotherhood of Teamsters, Local 282, High Rise Contract	Building Contractors Association & Independents
Local 46 Metallic Lathers Union and Reinforcing Iron Workers of NY and Vicinity of the International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers	Cement League
Local 46 Metallic Lathers Union and Reinforcing Iron Workers of NY and Vicinity of the International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers	Independent
Local 8 Roofers, Waterproofers & Allied Workers	Roofing and Waterproofing Contractors Association of New York and Vicinity
Local Union 1 of the United Association of Journeymen and Apprentices of the Pipe Fitting Industry of the United States and Canada	Association of Contracting Plumbers of the City of New York
Local Union Number 40 & 361 of Bridge, Structural Ornamental and Reinforcing Iron Workers AFL-CIO	Independent
Mason Tenders DC & Laborers' International Union – Local 78 & 79	Building Contractors Association
Mason Tenders DC & Laborers' International Union – Local 78 & 79	Interior Demolition Contractors Association
Mason Tenders DC & Laborers' International Union – Local 78 & 79	Independent
Mason Tenders DC & Laborers' International Union – Local 78 & 79	NYCDCA
Mason Tenders DC & Laborers' International Union – Local 78 & 79	Environmental Contractors Association
Mason Tenders DC & Laborers' International Union – Local 78 & 79	ABMC

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

Operative Plasterers' and Cement Masons' International Association Local No. 262	Independent
Painters and Allied Trades AFL-CIO, District Council No. 9 (Painting and Protective Coatings CBA)	Independent
Painters and Allied Trades AFL-CIO, District Council No. 9 (Painting and Protective Coatings CBA)	The Association of Master Painters & Decorators of NY, Inc. and The Association of Wall, Ceiling & Carpentry Industries of NY, Inc. and The Window and Plate Glass Dealers Association
Sheet Metal Workers' International Association, Local 28	Sheet Metal & Air Conditioning Contractors Association of New York City, Inc.
Sheet Metal Workers' International Association, Local 137	The Greater New York Sign Association
Structural Steel and Bridge Painters Local 806, DC 9 International Union of Painters and Allied Trades, AFL-CIO	New York Structural Steel Painting Contractors Association
Teamsters Local 813	Independent
Teamsters Local 813	IESI NY Corporation
The Cement Masons' Union, Local 780	Cement League
The District Council of Cement and Concrete Workers (comprised of Local 6A; Local 18A and Local 20)	Cement League
The District Council of Cement and Concrete Workers (comprised of Local 6A; Local 18A and Local 20)	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Heavy Carpenters	GCA
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Dockbuilders Local No. 1556	Concrete Contractors of NY
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Dockbuilders Local 1556	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Millwright Local 740	Independent

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Timbermen Local 1556	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Timbermen Local 1556	GCA
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Heavy Carpenters	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Manufacturing Woodworkers Association of Greater New York Incorporated
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Hoisting Trade Association of New York, Inc.
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Test Boring Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	Building Contractors Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America	The Association of Wall-Ceiling & Carpentry Industries of New York, Incorporated
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners	The Cement League
The District Council of NYC and Vicinity of the United Brotherhood of Carpenters and Joiners of America	New York City Millwright Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners	Greater New York Floor Covering Association
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Association of Architectural Metal & Glass

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Carpenters	Concrete Contractors of NY
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Building Construction Carpenters	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Local 2287	Independent
The District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America for Shop Carpenters	Independent
The Tile Setters and Tile Finishers Union of New York and New Jersey, Local 7 of the International Bricklayers and Allied Craftworkers	The Greater New York and New Jersey Contractors Association
United Derrickmen & Riggers Association, Local 197 of NY, LI, Westchester & Vicinity	Contracting Stonesetters Association Inc.
United Derrickmen & Riggers Association Local 197 of NY, LI, Westchester and Vicinity	Building Stone and Pre-cast Contractors Association

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Exhibit A

Project Labor Agreement - Letter of Assent

Dear: 7/23/21

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as the NYC Agency Renovation and located at Manhattan Criminal Court (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto;
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:

Local Union: N/A

Description of Work: NYC DDC - Manhattan Criminal Court Public Restrooms Renovation & Holding Cells Accessibility Upgrade

Contract Number(s): CO283TOIL

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT


Dated: 07/23/24

Stalco Construction, Inc.
(Name of Contractor or subcontractor)

Stalco Construction, Inc.
(Name of CM; GC; Contractor or
Higher Level Subcontractor)

Alan Nahmias - President
(Authorized Officer & Title)


1316 Motor Pkwy., Islandia, NY 11749
(Address)

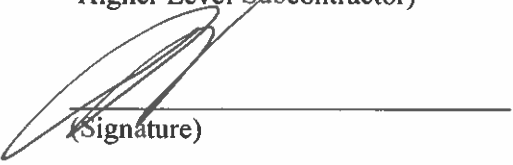
(Signature)

631-254-6767 / 631-254-8015
(Phone) (Fax)

Contractor's State License
N/A

Sworn to before me this
23 day of July, 2024

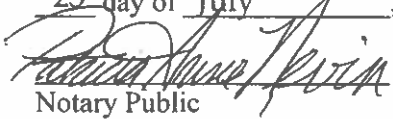
Notary Public

PATRICIA ANNE NEVIN
Notary Public - State of New York
No. 01NE6392027
Qualified in Suffolk County
My Commission Expires May 20, 2027

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Exhibit A

Project Labor Agreement - Letter of Assent

Dear: 7/22/24

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as the NYC Agency Renovation and located at Manhattan Criminal Court (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto:
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:

Local Union: _____

Description of Work: NYC DDC - Manhattan Criminal Court Public Restrooms Renovation
& Holding Cells Accessibility Upgrade

Contract Number(s): CO283TOIL

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Dated: 7/22/24

Stalco Construction, Inc.
(Name of CM, GC, Contractor or
Higher Level Subcontractor)

[Signature]
(Signature)

Trax Mechanical LLC
(Name of Contractor or subcontractor)

[Signature] President
(Authorized Officer & Title)

12 Park St. Brooklyn, NY 11206
(Address)

929-294-9358
(Phone) (Fax)

Contractor's State License

Sworn to before me this
22nd day of JULY 2024.

[Signature]
Notary Public

Jadino Pecora
NOTARY PUBLIC, STATE OF NEW YORK
Registration No. 01PB6436852
Qualified in Queens County
Commission Expires 07/25/2026

Exhibit A

Project Labor Agreement - Letter of Assent

Dear: _____

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as the NYC Agency Renovation and located at Manhattan Criminal Court (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto:
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:

Local Union: Plumbers Local 1

Description of Work: NYC DDC - Manhattan Criminal Court Public Restrooms Renovation
& Holding Cells Accessibility Upgrade

Contract Number(s): CO283TOIL

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Dated: 7/17/2024

Maccarone Plumbing, Inc.
(Name of Contractor or subcontractor)

Stalco Construction, Inc.
(Name of CM; GC; Contractor or
Higher Level Subcontractor)

Cristine Bruno VP
(Authorized Officer & Title)

Cristine Bruno
(Signature)


Main Office: 10 Sea Cliff Ave., Glen Cove, NY 11542
(Address)
NYC: 199-02 32nd Ave., Flushing, NY 11358

516-671-3232 / 516-671-3239 / NYC: 718-634-3500
(Phone) (Fax)

Contractor's State License
NYC MPL 1579

Sworn to before me this
17th day of July 2024.

Eileen M Baltrus
Notary Public

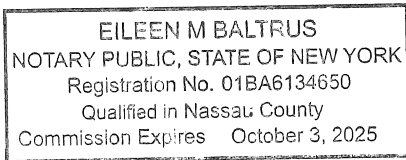

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Exhibit A

Project Labor Agreement - Letter of Assent

Dear: _____

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as the NYC Agency Renovation and located at Manhattan Criminal Court (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto;
- (2) Agrees to be bound by the legally established collective bargaining agreements; local trust agreements for employee benefit funds; and trust documents for joint apprentice programs as well as apprentice program rules and procedures but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Provide description of the Work, identify craft jurisdiction(s) and all contract numbers below:

Local Union: _____

Description of Work: NYC DDC - Manhattan Criminal Court Public Restrooms Renovation
& Holding Cells Accessibility Upgrade

Contract Number(s): CO283TOIL

2020 NYC AGENCY NEW CONSTRUCTION PROJECT LABOR AGREEMENT

Dated: _____

Uni-Lite Electric
(Name of Contractor or subcontractor)

Stalco Construction, Inc.
(Name of CM; GC; Contractor or
Higher Level Subcontractor)

(Authorized Officer & Title)

336 West 37th St., Suite 650, New York, NY 10018
(Address)

(Signature)

646-901-5550
(Phone) (Fax)

Contractor's State License

Sworn to before me this
____ day of _____,

Notary Public

Exhibit B

**NEW YORK CITY BUILDING AND CONSTRUCTION TRADES COUNCIL
STANDARDS OF EXCELLENCE**

The purpose of this Standard of Excellence is to reinforce the pride of every construction worker and the commitment to be the most skilled, most productive and safest workforce available to construction employers and users in the City of New York. It is the commitment of every affiliated local union to use our training and skills to produce the highest quality work and to exercise safe and productive work practices.

The rank and file members represented by the affiliated local unions acknowledge and adopt the following standards:

- *Provide a full day's work for a full days pay;*
- *Safely work towards the timely completion of the job;*
- *Arrive to work on time and work until the contractual quitting time;*
- *Adhere to contractual lunch and break times;*
- *Promote a drug and alcohol free work site;*
- *Work in accordance with all applicable safety rules and procedures;*
- *Allow union representatives to handle job site disputes and grievances without resort to slowdowns, or unlawful job disruptions;*
- *Respect management directives that are safe, reasonable and legitimate;*
- *Respect the rights of co-workers;*
- *Respect the property rights of the owner, management and contractors.*

The Unions affiliated with the New York City Building and Construction Trades Council will expect the signatory contractors to safely and efficiently manage their jobs and the unions see this as a corresponding obligation of the contractors under this Standard of Excellence. The affiliated unions will expect the following from its signatory contractors:

- *Management adherence to the collective bargaining agreements;*
- *Communication and cooperation with the trade foremen and stewards;*
- *Efficient, safe and sanitary management of the job site;*
- *Efficient job scheduling to mitigate and minimize unproductive time;*
- *Efficient and adequate staffing by properly trained employees by trade;*
- *Efficient delivery schedules and availability of equipment and tools to ensure efficient job progress;*
- *Ensure proper blueprints, specifications and layout instructions and material are available in a timely manner*
- *Promote job site dispute resolution and leadership skills to mitigate such disputes;*
- *Treatment of all employees in a respectful and dignified manner acknowledging their contributions to a successful project.*

The affiliated unions and their signatory contractors shall ensure that both the rank and file members and the management staff shall be properly trained in the obligations undertaken in the Standard of Excellence.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

Exhibit “C” - HireNYC Construction Careers

(August 2020 version)

Non-exhaustive list of zip codes where at least 15% of the individuals are below the federal poverty rate
(Zip codes within ~100 mile radius of NYC)

Zip Code	Borough	Neighborhood
10001	Manhattan	Midtown South
10002	Manhattan	Chinatown
10009	Manhattan	East Village
10025	Manhattan	Manhattan Valley
10026	Manhattan	Central Harlem
10027	Manhattan	Manhattanville
10029	Manhattan	East Harlem
10030	Manhattan	Central Harlem
10031	Manhattan	Hamilton Heights
10032	Manhattan	Inwood and Washington Heights
10033	Manhattan	Washington Heights
10034	Manhattan	Inwood
10035	Manhattan	East Harlem
10037	Manhattan	Central Harlem
10038	Manhattan	Lower Manhattan
10039	Manhattan	Central Harlem
10040	Manhattan	Inwood and Washington Heights
10301	Staten Island	St. George
10302	Staten Island	Port Richmond
10303	Staten Island	Mariner's Harbor
10304	Staten Island	Stapleton
10310	Staten Island	West Brighton
10451	Bronx	Concourse Village
10452	Bronx	High Bridge
10453	Bronx	University Heights
10454	Bronx	Mott Haven
10455	Bronx	Longwood
10456	Bronx	Melrose
10457	Bronx	Central Bronx
10458	Bronx	Bedford Park
10459	Bronx	Morrisania
10460	Bronx	East Tremont
10462	Bronx	Parkchester
10463	Bronx	Kingsbridge
10466	Bronx	Wakefield
10467	Bronx	Norwood
10468	Bronx	Bronx Park and Fordham
10472	Bronx	Unionport
10473	Bronx	Soundview
10474	Bronx	Hunts Point

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

PLA Exhibit C - HireNYC Construction Careers

(August 2020 version)

Non-exhaustive list of zip codes where at least 15% of the individuals are below the federal poverty rate

(Zip codes within ~100 mile radius of NYC)

Zip Code	Borough	Neighborhood
11101	Queens	Long Island City
11102	Queens	Northwest Queens
11106	Queens	Ravenswood
11203	Brooklyn	East Flatbush
11204	Brooklyn	Borough Park
11205	Brooklyn	Fort Greene
11206	Brooklyn	East Williamsburg
11207	Brooklyn	East New York
11208	Brooklyn	East New York / Cypress Hills
11211	Brooklyn	Williamsburg
11212	Brooklyn	Brownsville
11213	Brooklyn	Crown Heights
11214	Brooklyn	Bensonhurst
11216	Brooklyn	Central Brooklyn
11218	Brooklyn	Kensington
11219	Brooklyn	Borough Park
11220	Brooklyn	Sunset Park
11221	Brooklyn	Bushwick
11223	Brooklyn	Gravesend
11224	Brooklyn	Coney Island
11225	Brooklyn	Prospect Lefferts Gardens
11226	Brooklyn	Prospect Park South
11230	Brooklyn	Midwood
11232	Brooklyn	Sunset Park
11233	Brooklyn	Ocean Hill
11235	Brooklyn	Brighton Beach
11237	Brooklyn	Bushwick and Williamsburg
11239	Brooklyn	Starrett City
11354	Queens	Downtown Flushing
11355	Queens	Queensboro Hill
11368	Queens	South Corona
11369	Queens	East Elmhurst
11373	Queens	Elmhurst
11416	Queens	Southwest Queens
11417	Queens	Ozone Park
11418	Queens	Richmond Hill
11430	Queens	Ozone Park
11432	Queens	Jamaica Center
11433	Queens	South Jamaica
11435	Queens	Briarwood
11691	Queens	Far Rockaway
11692	Queens	Arverne

Data Source: 2013-2017 American Community Survey 5-year estimates

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

PLA Exhibit C - HireNYC Construction Careers

(August 2020 version)

Non-exhaustive list of zip codes where at least 15% of the individuals are below the federal poverty rate

(Zip codes within ~100 mile radius of NYC)

Zip Code	State	City or Town
06401	CT	Ansonia
06510	CT	New Haven
06511	CT	New Haven
06513	CT	New Haven
06515	CT	New Haven
06519	CT	New Haven
06604	CT	Bridgeport
06605	CT	Bridgeport
06607	CT	Bridgeport
06608	CT	Bridgeport
06610	CT	Bridgeport
06702	CT	Waterbury
06704	CT	Waterbury
06705	CT	Waterbury
06706	CT	Waterbury
06708	CT	Waterbury
06710	CT	Waterbury
06810	CT	Danbury
07002	NJ	Bayonne
07017	NJ	East Orange
07018	NJ	East Orange
07022	NJ	Fairview
07026	NJ	Garfield
07029	NJ	Harrison
07047	NJ	North Bergen
07050	NJ	Orange
07055	NJ	Passaic
07060	NJ	Plainfield
07062	NJ	Plainfield
07087	NJ	Union City
07093	NJ	West New York
07102	NJ	Newark
07103	NJ	Newark
07104	NJ	Newark
07105	NJ	Newark
07106	NJ	Newark
07107	NJ	Newark
07108	NJ	Newark
07111	NJ	Irvington
07112	NJ	Newark
07114	NJ	Newark
07201	NJ	Elizabeth
07202	NJ	Elizabeth
07206	NJ	Elizabethport
07208	NJ	Elizabeth
07304	NJ	Jersey City
07305	NJ	Jersey City
07306	NJ	Jersey City
07307	NJ	Jersey City
07310	NJ	Jersey City

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

PLA Exhibit C - HireNYC Construction Careers

(August 2020 version)

Non-exhaustive list of zip codes where at least 15% of the individuals are below the federal poverty rate

(Zip codes within ~100 mile radius of NYC)

Zip Code	State	City or Town
07501	NJ	Paterson
07502	NJ	Paterson
07503	NJ	Paterson
07504	NJ	Paterson
07505	NJ	Paterson
07513	NJ	Paterson
07514	NJ	Paterson
07522	NJ	Paterson
07524	NJ	Paterson
07608	NJ	Teterboro
07703	NJ	Fort Monmouth
07712	NJ	Asbury Park
07727	NJ	Farmingdale
07734	NJ	Keansburg
07740	NJ	Long Branch
07820	NJ	Allamuchy
07939	NJ	Lyons
08031	NJ	Bellmawr
08045	NJ	Lawnside
08095	NJ	Winslow
08102	NJ	Camden
08103	NJ	Camden
08104	NJ	Camden
08105	NJ	Camden
08110	NJ	Pennsauken
08217	NJ	Elwood
08224	NJ	New Gretna
08608	NJ	Trenton
08609	NJ	Trenton
08611	NJ	Trenton
08618	NJ	Trenton
08638	NJ	Trenton
08701	NJ	Lakewood
08751	NJ	Seaside Heights
08808	NJ	Broadway
08861	NJ	Perth Amboy
08901	NJ	New Brunswick
10545	NY	Maryknoll
10550	NY	Mount Vernon
10601	NY	White Plains
10701	NY	Yonkers
10703	NY	Yonkers
10705	NY	Yonkers
10801	NY	New Rochelle
10927	NY	Haverstraw
10932	NY	Howells
10940	NY	Middletown
10950	NY	Monroe
10952	NY	Monsey
10963	NY	Otisville
10977	NY	Spring Valley

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

PLA Exhibit C - HireNYC Construction Careers

(August 2020 version)

Non-exhaustive list of zip codes where at least 15% of the individuals are below the federal poverty rate
(Zip codes within ~100 mile radius of NYC)

Zip Code	State	City or Town
11096	NY	Inwood
11550	NY	Hempstead
11556	NY	Uniondale
11713	NY	Bellport
11798	NY	Wyandanch
11951	NY	Mastic Beach
11970	NY	South Jamesport
12401	NY	Kingston
12416	NY	Chichester
12419	NY	Cottkill
12427	NY	Elka Park
12428	NY	Ellenville
12432	NY	Glasco
12457	NY	Mount Tremper
12475	NY	Ruby
12489	NY	Wawarsing
12490	NY	West Camp
12491	NY	West Hurley
12516	NY	Copake
12550	NY	Newburgh
12561	NY	New Paltz
12583	NY	Tivoli
12589	NY	Wallkill
12594	NY	Wingdale
12601	NY	Poughkeepsie
12701	NY	Monticello
12725	NY	Claryville
12729	NY	Cuddebackville
12732	NY	Eldred
12733	NY	Fallsburg
12743	NY	Highland Lake
12747	NY	Hurleyville
12749	NY	Kauneonga Lake
12751	NY	Kiamesha Lake
12754	NY	Liberty
12758	NY	Livingston Manor
12759	NY	Loch Sheldrake
12762	NY	Mongaup Valley
12763	NY	Mountain Dale
12779	NY	South Fallsburg
12780	NY	Sparrow Bush
19007	PA	Bristol
19123	PA	Philadelphia
19125	PA	Philadelphia
19134	PA	Philadelphia
19135	PA	Philadelphia
19136	PA	Philadelphia
19137	PA	Philadelphia

Data Source: 2013-2017 American Community Survey 5-year estimates

Page 5 of 5

EXHIBIT "D"
MEMORANDUM OF UNDERSTANDING

MEMORANDUM OF UNDERSTANDING, entered into as of _____, between the City of New York ("City") with an office located at City Hall, New York, NY 10007, the Building and Construction Trades Council of Greater New York and Vicinity ("BCTC"), on its behalf and on behalf of its affiliated unions, with its principal place of business located at 350 West 31st Street, New York, NY 10001, and the Building Trade Employers' Association of New York City ("BTEA"), on its behalf and on behalf of its affiliated contractors, with its principal place of business located at 1325 Avenue of the Americas, New York, NY 10019.

WHEREAS, since 2009, the City, the BCTC, and the BTEA have entered into Memoranda of Understanding (each an "MOU"), contemporaneous to the City entering to Project Labor Agreements with the BCTC (each a "PLA"), setting goals on new apprenticeship opportunities for graduates of direct entry pre-apprenticeship programs for low-income New Yorkers, minorities, high school students, women, veterans, NYCHA residents, and qualified employees of Minority- and Women-Owned Business Enterprises ("M/WBEs") that become signatory to the union, and have provided increased opportunities for New Yorkers to have access to good union construction careers;

WHEREAS, in 2014, the City and the BCTC entered into an MOU related to the New York City Build It Back Program and committed to encourage contractors and subcontractors to employ Sandy-impacted residents and for the City and the BCTC to work together with community-based organizations to recruit and train New York City residents, with an emphasis on Sandy-impacted low income residents;

WHEREAS, the BCTC and the BTEA committed to: (i) promote the representation of veterans, women, high school graduates of the City's public schools, and New Yorkers in need of economic opportunity in apprenticeship programs jointly sponsored by BCTC unions and BTEA contractors, and (ii) improve workforce training and development for entrance into the construction industry;

WHEREAS, in 2014, the City of New York issued *Career Pathways: One City Working Together*, with a commitment to maximize local job opportunities through the City's contracts, and as such the City is committed to ensuring that low-income New Yorkers have access to the good jobs and careers that are created through the City's capital investments and through this MOU and contemporaneous PLA, the City the BCTC, and with the cooperation of the BTEA contractors can connect low-income New Yorkers to good prevailing wage construction careers;

WHEREAS, through this MOU and contemporaneous PLAs, the City, the BCTC, and the BTEA commit to recruiting in low-income communities, providing opportunities through pre-apprenticeship and apprenticeship programs for access to construction careers, and ensuring residents of low-income communities, including apprentices, are provided opportunities to work on publicly-funded and -assisted construction projects;

WHEREAS, pursuant to Local Law 1 of 2013, the City is also committed to its M/WBE program, and in partnership with the M/WBE Leadership Association seeks to encourage eligible companies to certify as M/WBEs, and provides a wide range of training and technical assistance to build the capacity of its certified companies to bid successfully for the City's contracts and subcontracts;

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

WHEREAS, an important element in the success of pre-apprenticeship and apprenticeship programs, as well as in creating work opportunities for contractors and sub-contractors in New York City, is the availability of work on publicly funded and assisted projects; and

WHEREAS, the parties to this MOU desire to publicly state their intentions with respect to apprenticeship programs and the creation of contracting and other economic opportunities in the construction industry.

NOW, THEREFORE, the City, the BCTC, and the BTEA state as follows:

1. Scope. This MOU:

a. States the intentions of the City, the BCTC, and the BTEA regarding:

- a. the provision of opportunities in apprenticeship programs jointly sponsored by BCTC unions and BTEA contractors;
- b. the City's application of apprenticeship requirements in City construction contracts from the time of execution through December 31, 2024;
- c. the joint goal of the City, the BCTC, and the BTEA to create employment opportunities, including apprenticeships, in the construction industry; and

b. Shall terminate on December 31, 2024

2. To facilitate the commitments set forth in this MOU, each Local Union shall designate a HireNYC Construction Careers lead representative to work in partnership with the Mayor's Office of Workforce Development ("WKDEV") to implement these workforce and apprenticeship provisions within the union and across City construction contracts.

3. The BCTC and the BTEA shall work collaboratively with the City to reserve at least 500 new apprenticeship positions each calendar year through both the general recruitment and direct entry programs for New York City residents living in zip codes where at least 15% of the individuals in such zip code are below the federal poverty rate and NYCHA residents regardless of zip code.

4. The BCTC and BTEA shall work collaboratively with the City to reserve new apprenticeship positions each year for direct entry.

- a.** New York State Department of Labor ("NYSDOL") approved Direct Entry programs may be used by sponsors of Registered Apprenticeship programs as another way to bring apprentices into their programs. It is a tool to help sponsors reach underrepresented populations. Direct Entry provides individuals who successfully complete an apprenticeship preparation program, and who meet the minimum requirements for a NYS Registered Apprenticeship program, with the direct opportunity for an interview with the

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

sponsor of a program bypassing the general recruitment scheduled for the Apprentices Programs.

5. Apprenticeship programs jointly sponsored by Local Unions and employers affiliated with the BTEA shall, subject to approval by the NYSDOL and to the extent consistent with applicable consent decrees, court orders or similar mandates, reserve up to the following percentages of their new apprenticeships (some apprentices may be counted in more than one category) for direct entry each year:
 - a. 20% for graduates of New York City public high school who have completed pre-apprenticeship training provided by The Edward J. Malloy Initiative for Construction Skills ("C-SKILLS");
 - b. 10% for veterans of the U.S. Armed Forces who are referred by New York City Helmets to Hardhats ("NYC H2H"), provided, however, that any veterans whose qualifications allow them to enter unions as journeypersons shall be counted toward the fulfillment of this percentage;
 - c. 15% for women who have completed pre-apprenticeship training provided by Nontraditional Employment for Women ("NEW");
 - d. 10% for NYCHA and Section 8 residents who have completed pre-apprenticeship training provided by C-SKILLS, NEW, the NYCHA Resident Training Academy ("NRTA"), or Pathways to Apprenticeships ("P2A");
 - e. 10% for justice-involved individuals who have completed pre-apprenticeship training provided by C-SKILLS, NEW, NRTA, or P2A; and
 - f. 5% for qualified employees of certified minority- and women-owned business enterprises and other employers not signatory to collective bargaining agreements of unions affiliated with the BCTC which become signatory to such collective bargaining agreements, provided, however, that any such employees whose qualifications allow them to enter unions as journeypersons shall be counted toward the fulfillment of this percentage.
6. To help reach the goals set forth in paragraph 3, 4, and 5, the City, the BCTC and the BTEA will work cooperatively to identify and pursue appropriate sources of public and private funds and resources, as needed, to provide pre-apprenticeship training scaled to support the goals targeting at least seven hundred (700) pre-apprenticeship positions cumulatively for all above named direct entry programs each year. The City will help coordinate recruitment within the zip codes and target populations identified in paragraphs 3, 4 and 5.
7. The goals in Paragraphs 3, 4, and 5 are aggregate goals for apprenticeship programs jointly sponsored by the Local Unions and BTEA contractors to achieve on an annual basis through their general recruitments and direct entry programs. The City recognizes that different apprenticeship programs face different circumstances and

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

have varying capacities to meet the percentages set forth in each category; notwithstanding that, the BCTC and the BTEA agree to encourage and support meeting the goals in Paragraphs 3, 4, and 5, and to work with apprenticeship programs jointly sponsored by their affiliated unions and contractors to take affirmative steps to achieve that goal.

8. The City, BCTC, and BTEA acknowledge that on federally funded projects NYCHA, and the City on certain federally funded projects, must comply with Executive Order 11246 and federal regulations contained at 24 CFR Part 135 ("Section 3") regarding efforts to employ residents of NYCHA developments and other Section 3 populations.
9. The City, the BCTC, and the BTEA will jointly seek any necessary waivers from NYSDOL with respect to direct entry goals for the joint apprentice programs, as well as jointly support and encourage 100% participation of all affiliated joint apprentice programs.

10. Reporting.

- a. Each Local Union shall provide, or cause to be provided by their Apprentice Directors, copies of the following reports to WKDEV within thirty (30) days of the submission to NYSDOL:
 - i. *Apprentice Training Recruitment Notification and Minimum Qualifications (AT 505)* submissions to NYSDOL;
 - ii. *Apprentice Training Program Affirmative Action Plan (AT 603)* submissions to NYSDOL; and
 - iii. *Apprenticeship Agreement (AT 401)* submissions to NYSDOL.
- b. Pre-apprenticeship programs funded in part by the City will provide quarterly reports, beginning at the end of the first quarter after the first class is held, to the WKDEV with detailed information as required by NYC's Workforce Common Metrics reporting for all individuals trained in all classes.
- c. On an annual basis, beginning on January 1, 2021, the City shall provide an electronic report to the BCTC that contains a list of contracts registered in the previous full fiscal year that were subject to either a City Project Labor Agreement or the Apprenticeship Directive. Such list shall contain the following for each contract:
 - i. contracting agency
 - ii. contract name;
 - iii. prime contractor name;
 - iv. registered dollar amount; and
 - v. date of registration.
- d. Upon mutual agreement, the parties may modify these reporting requirements, as needed.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

11. **City of New York Apprenticeship Directive.** As a means of expanding the pool of work available to apprentices and graduates of state-approved apprenticeship programs providing opportunities to the groups of individuals designated in Paragraphs 3 and 5 above, the City states its intention to implement, as may be amended from time to time, the Directive, attached as Exhibit A. The Directive directs City agencies, for construction contracts where either (i) the cost estimate of the contract exceeds \$3 million, or (ii) the cost estimate of the contract exceeds \$2 million on a project with a cost estimate of at least \$5 million, and for such other contracts as the bidding agency determines to be appropriate, to require the contractor and any of its subcontractors with subcontracts worth at least \$2 million to have apprenticeship agreements appropriate for the type and scope of work to be performed that have been registered with, and approved by, the New York State Commissioner of Labor, and shall have passed any required probationary period and recertification established by the New York State DOL.

12. The City shall include a statement concerning the applicability of the Directive in every City Record notice of the solicitation or award of a contract for a public works project. Within five (5) days of the issuance of any waiver from the apprenticeship requirement, the City shall notify the BCTC and the BTEA, in writing or electronically, of the granting of such waiver and the reasons therefore.

13. The City, the BCTC, and the BTEA look forward to working together and with the contractor community in a spirit of cooperation and good will toward the goal that all New Yorkers from diverse backgrounds, particularly minorities, women, returning veterans, recent public high school graduates, NYCHA residents, individuals in need of economic opportunity, and justice-involved individuals, are well-prepared for participation in the workforce and can gain access to good careers in the construction industry, in both the private and public sectors.

For the City of New York

By: _____
First Deputy Mayor, Dean Fuleihan

For Building and Construction Trades Council of Greater New York and Vicinity

By: _____
Gary LaBarbera, President

For Building Trades Employers' Association of New York City

By: _____
Louis J. Coletti, President & CEO

SCHEDULE “B” - DRUG AND ALCOHOL POLICY

PREAMBLE

WHEREAS, [CONSTRUCTION MANAGER] (“Construction Manager”), for the construction project located at [PROJECT ADDRESS] (“Project”) desires to provide for a safe, drug and alcohol-free work site for the Project;

WHEREAS, the parties have entered into a separate Project Labor Agreement for the Project and have agreed to negotiate in good faith a Project Drug & Alcohol Testing Policy;

WHEREAS, this Testing Policy is collectively negotiated between the Construction Manager and the New York City Building and Construction Trades Council (“Council”) (the Construction Manager and BCTC are collectively referred to hereafter as the “Parties”);

WHEREAS, the Parties each currently have respective drug and alcohol policies, including the Projects' Zero-Tolerance policy;

WHEREAS, the Parties desire to maximize project safety conditions for the Project personnel and public, as well as deter violations of the Parties' respective drug and alcohol policies;

NOW, THEREFORE, the Parties agree to this Policy as of the date hereof,

ARTICLE 1 - PARTIES

This Drug & Alcohol Testing Policy (“Policy”) is hereby established by the Construction Manager and the Council, on behalf of itself and its affiliated local union members, and the signatory local unions on behalf of themselves and their members.

ARTICLE 2-GENERAL CONDITIONS

SECTION 2.1 - SUMMARY

In order to reinforce the Parties' respective drug and alcohol policies, including the Projects' zero tolerance policy regarding the prohibition of the use of drugs and alcohol, and to deter Project personnel from violating those policies, the Parties agree that all Project Personnel (defined later) will be required to submit to drug and/or alcohol testing randomly, post-accident, and for reasonable suspicion.

Any individual on site that violates this Policy is subject to disciplinary action, including, without limitation, loss of site access privileges.

SECTION 2.2 - REVOCATION OF PROJECT ACCESS PRIVILEGES

Any one of the following occurrences will result in the immediate revocation of a Project Personnel's project access privileges:

1. An individual is found selling or using drugs or alcohol, or otherwise is under the influence of drugs or alcohol, subject to the other terms of this Policy, on a Project Site;
2. An individual has been convicted under any criminal drug or alcohol

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

statute for a violation occurring in the workplace within the past two years;

3. An individual who refuses to abide by the Projects' drug and alcohol policy, or refuses to submit to a test in accordance with this Policy;
4. An individual who switches, adulterates, or in any way tampers with a specimen required to be submitted in accordance with this Policy.

SECTION 2.3 - DEFINITIONS

Confirmed Positive Test: The presence of drugs, drug metabolites, or alcohol in a person's body that equals or exceeds the established cut off levels as defined in Exhibit 1. For drugs, the sample will have undergone Laboratory screening and confirmation testing and must have been verified as positive by a Medical Review Officer. A positive test result for alcohol obtained through Evidential Breath Testing is considered a Confirmed Positive Test.

Employee Assistance Program (EAP): An EAP is generally considered a workplace-based, confidential program designed to help employees deal effectively with a variety of personal problems, and, of relevance to this policy, substance abuse problems. The EAP promotes assessments and short-term counseling. An EAP shall also include any similar education or rehabilitation program provided by the Councilor its respective members. The Project Personnel that are required to participate in the EAP shall be responsible for the cost of their consultation with an EAP and/or participation in any education or rehabilitation program.

Evidential Breath Testing Device (EBT): A device that is used to measure alcohol in the breath and which meets National Highway Traffic Safety Administration's specifications for precision and accuracy.

Laboratory: A laboratory that is SAMHSA (Substance Abuse and Mental Health Services Administration) certified for the testing of drugs.

Medical Review Officer (MRO): A licensed physician responsible for receiving laboratory results generated by an employer's drug testing plan who has knowledge of substance abuse disorders and medical training to interpret and evaluate a donor's confirmed positive test result together with his/her medical history and all other relevant information.

Previous Worker: All individuals whose employment relationship with the contractor, company or organization no longer exists.

Project Site: The construction area for respective Project.

Reasonable Suspicion: When a qualified trade contractor, the Developer or Construction Manager as set forth in Section 3.7, reasonably believes that an individual has violated this Policy. Reasonable suspicion is based upon (1) specific, current, behavioral or performance indicators, (2) the possible manufacture, distribution, consumption or possession of unauthorized drugs, drug paraphernalia, or alcohol, or (3) documented investigation by an agency retained by, or otherwise independent from, the Developer or Construction Manager.

SECTION 2.4 - INCLUDED SUBJECTS

This Policy shall cover all employees of the Owner, Construction Manager and Project

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

trade contractors, their subcontractors and any other of their respective personnel at any level that are performing any activity at a Project Site, inclusive of managers, superintendents and supervisors, except as specifically excluded by Section 2.5 of this Policy (collectively and singularly, "Project Personnel").

SECTION 2.5 - EXCLUDED SUBJECTS

The following persons are not subject to the provisions of this Policy:

- A. Employees and entities engaged in off-site manufacture, modifications, repair, maintenance, assembly, painting, handling or fabrication of components, materials, equipment or machinery;
- B. Vendors and employees of vendors engaged on a Project Site in equipment testing, inspection, training, warranty work, or engaged in corrections of defective or nonconforming work, unless such employees are expressly included in the bargaining unit of a local signatory to this Agreement;
- C. Employees engaged in ancillary work on a Project which is performed by third parties, such as electric utilities, gas utilities, telephone companies, and railroads, or any other work not constituting Project work;
- D. Employees of any governmental authority (state, local or otherwise);
- E. Employees and contractors engaged in work on the Project Site as part of due diligence or monitoring, which work is ancillary to Project work; and
- F. Emergency responders.

SECTION 2.6 - PRESCRIPTION AND NON-PRESCRIPTION DRUGS

The use of prescription drugs not prescribed directly to Project Personnel is prohibited, including the use of drugs prescribed to a spouse or domestic partner. The use of non-prescription drugs that are sold outside the United States and that contain substances that are illegal or require a prescription in the United States are prohibited, unless prescribed by a licensed physician.

SECTION 2.7 - SEARCHES

In order for the Construction Manager to ensure the safety of Project Personnel and for the Construction Manager to protect its assets, the Construction Manager shall have the right upon good cause (such as reasonable suspicion of a violation of this Policy) to conduct reasonable searches for alcohol, drugs and related paraphernalia anywhere within the boundaries of a Project Site. A search may include any assets owned or leased by any Project Personnel that is on a Project Site, including without limitation, vehicles, lockers, gang boxes, desks and personal property brought onto a Project Site, but excluding personal body searches or physical contact with employees.

ARTICLE 3 - DRUG & ALCOHOL TESTING

SECTION 3.1 - COLLECTION PROCESS

As of the execution date of this PLA, Project Personnel may be required to submit urine samples ("Preliminary Drug Screening") for the purpose of detecting the presence of drugs as part of the random, post-accident or reasonable suspicion testing, in accordance with

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

chain of custody protocols as established by Substance Abuse and Mental Health Services Administration (SAMHSA), utilizing an instant result test cup for Preliminary Drug Screenings, such testing is to be performed on-site by an independent service provider. The results from the instant result test cup will be considered preliminary. The sample will be sent to a SAMHSA certified testing laboratory for confirmation.

As of the date hereof, all Project Personnel will be required to submit to an Evidential Breath Test (EBT) for the purpose of detecting the presence of alcohol when submitting to random, post-accident or reasonable suspicion testing. Alcohol testing will not be conducted for pre-access testing.

SECTION 3.2 - NEGATIVE PRELIMINARY DRUG SCREENING

Project Personnel with a negative Preliminary Drug Screening will be considered conditionally accepted for Project site access, pending confirming laboratory results. Site access privileges will be revoked if the subsequent laboratory results determine that the sample has tested positive for drugs or that the sample has been adulterated.

SECTION 3.3 POSITIVE PRELIMINARY DRUG SCREENING

If the Preliminary Drug Screening indicates a positive result, the individual will not be allowed access to the Project Site. The sample will be sent to the certified laboratory for analysis and, if applicable, reviewed by the Medical Review Officer (MRO). If the laboratory confirmation results are also positive, the individual will be considered in violation of this Policy and their site access will be revoked for at least 30 days. If the laboratory confirmation results are negative, the Project Personnel's site access will not be revoked.

SECTION 3.4 CONFIRMED POSITIVE TEST RESULTS

A. POSITIVE DRUG TEST

A drug test is considered positive if the test results exceed the limits shown in Exhibit 1, which is attached hereto and incorporated herein by reference. The test will be confirmed through a second analysis process and reviewed by an MRO before results are reported. Project Personnel with confirmed positive drug test results will have their site access revoked. In case of a "false positive" result, any such Personnel shall be entitled to the reimbursement of any wages lost during the suspension caused by any such false positive result.

B. POSITIVE EBT

An EBT is considered positive if the test results exceed .04 BrAC, or as otherwise set forth in Exhibit 1. Project Personnel with a positive alcohol test result will be subject to the remedies set forth in Exhibit 1.

C. REINSTATEMENT OF SITE ACCESS PRIVILEGES

(a) Subject to section 3.4(C)(a) immediately below, if the site access of a Project Personnel has been revoked pursuant to this Policy, then any such person may request that their site access be reinstated after 30 days, provided that all of the following conditions are met to the reasonable satisfaction of the Construction Manager. :

1. The individual has provided proof of wellness from an accredited rehabilitation

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

facility or has provided proof that treatment isn't needed as attested to by a licensed health care provider specializing in the diagnosis and treatment of alcohol and drug abuse.

2. A current drug and alcohol test is obtained within three (3) days of the request for re-access to the site and proof of a negative test result has been received; and
3. The individual agrees to submit to multiple testing for two (2) full years from the date of gaining re-access to the project, the scheduling of which will be determined at the sole discretion of the Construction Manager. If all of these conditions have been met, the Construction Manager agrees that it will not unreasonably withhold their consent to any such request.

(b) Unlawful possession, concealment, use, purchase, sale, manufacture, dispensation or distribution of illegal drugs or un-prescribed controlled substances on the Project site will subject the Project Personnel Employee to immediate removal from the Project site and shall bar such Project Personnel Employee from returning for a minimum of three (3) months, which return shall, in any event, be subject to the reasonable approval by Construction Manager.

(c) All of the Parties agree that any such Project Personnel will only be entitled to any such reinstatement of site access privileges one time and that any subsequent violation of this Policy will result in the permanent termination of access to the Project Site.

SECTION 3.5 - RANDOM TESTING

A third-party provider designated by the Construction Manager will randomly select by an objective criteria a testing pool for random drug and/or alcohol testing from all Project Personnel with site access cards. Any individual selected for a random drug and/or alcohol test will be required to submit to an Evidential Breath Test (EBT) and/or drug test. Individuals may be tested more than once during any given time period. The Parties acknowledge and agree that an EBT may be required without a drug test and that a drug test may be required without an EBT, as solely determined by the Construction Manager.

If an individual is unable to attend the first scheduled random drug test as a result of being involved in a work-related task, such drug test will be rescheduled and will be completed at or before the conclusion of such employee's then current work shift. If the second drug test is missed for any reason, the incident will be reviewed by the Construction Manager, who shall have the right to terminate the site access privileges of any such Project Personnel until such time as that Project Personnel has complied with this Policy. If the individual refuses to take the test, their access privileges will be immediately terminated for cause.

SECTION 3.6 - POST ACCIDENT TESTING

After each work-related incident or injury requiring the services of a licensed health care provider, all Project Personnel involved with the incident will be required to submit to a drug and/or alcohol test immediately following the incident. In instances where emergency care is necessary, the drug and/or alcohol test shall be obtained by the care facility, if possible, within 24 hours after treatment is rendered. If more than 48 hours have passed before an injury is reported and treated by a licensed health care provider, an alcohol test will not be required.

In addition, any Project Personnel involved in a non-injury related incident at a Project Site

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

with damages at or in excess of \$200 will be required to submit to a drug and/or alcohol test unless:

- A. It is determined, after conducting an investigation and interviewing all employees involved and any witnesses, that the employee's performance can be completely discounted as a contributing factor to the incident; or
- B. It is determined, after conducting an incident investigation and interviewing all employees and any witnesses that the incident was caused by inadequate equipment or system design, and/or premature failure of equipment or system components.

SECTION 3.7 - REASONABLE SUSPICION TESTING

All Project Personnel will be required to submit to a drug and/or alcohol test when there is reasonable suspicion the individual has violated this policy.

Reasonable suspicion includes, without limitation, the following:

- A. Violent or irrational behavior;
- B. Emotional or physical unsteadiness;
- C. Sensory or motor-skill malfunctions;
- D. Slurred speech;
- E. The odor of alcohol or drugs on clothing or breath in conjunction with other indicators;
- F. Possession of alcohol, unauthorized drugs or drug paraphernalia; or
- G. Documented evidence of an independent investigation regarding Project Personnel's consumption of what is reasonably believed to be an alcoholic beverage or drugs in violation of the Project's policies and/or this Policy.

Reasonable suspicion testing may only be ordered by supervisory personnel that: (a) have been trained to recognize the above referenced factors; or (b) have received credible documentary evidence from an independent investigator that a Project Personnel has violated a drug and/or alcohol policy. It is agreed that any certified training program shall satisfy the training requirement.

SECTION 3.8 - PRIVACY CONSIDERATIONS

The Parties agree to use reasonable efforts to conduct any testing pursuant to this Policy in accordance with the privacy concerns of Project Personnel. To address these concerns, the Parties agree that:

1. The testing station(s) shall be screened off, or otherwise closed off from public view.
2. All documents and information regarding the testing, including test results, shall be maintained by the respective custodian(s) of record in accordance with their respective privacy policies, which any Project Personnel shall be entitled to review upon timely request.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

- 3. The Parties agree to make a good faith effort to resolve any other privacy concern of Project Personnel regarding this Policy, provided that any such concerns do not interfere with the purpose of this Policy.

ARTICLE 4 – GRIEVANCE

SECTION 4.1 - REPRESENTED WORKERS

Nothing in this Policy shall restrict a member of a signatory local union from filing a grievance in accordance with the member's collective bargaining agreement or a Project Labor Agreement, provided that the grievance shall be limited to whether the removal of a member for violation of this Policy was conducted in compliance with the terms and conditions set forth herein.

SECTION 4.2 - HOLD HARMLESS

The Construction Manager agrees to hold harmless and indemnify the Union/Council and its representatives from any liability that may be incurred as a result of the Company’s Drug and Alcohol Policy to the extent caused by the negligence or intentional misconduct of the Construction Manager.

IN WITNESS WHEREOF the parties have agreed to this Policy as of _____, 20__.

FOR [CONSTRUCTION MANAGER]

By: _____

Name: [INSERT NAME]_____

Title: [INSERT TITLE]_____

FOR GREATER NEW YORK CITY BUILDING TRADES COUNCIL

By: _____

Name: Gary LaBarbera _____

Title: President

EXHIBIT 1

CLASS OF DRUGS TESTED AND THEIR RESPECTIVE CUT-OFF LIMITS

The cut-off limits established are those recommended by the U.S. Department of Health and Human Services in their mandatory Guidelines for Federal Workplace Drug Testing Programs.

<u>Drug Class</u>	<u>Screening Cut-Off Limit (ng/ml)</u>	<u>Confirmation Cut-off Limit (ng/ml)</u>
Amphetamines	1000	500
Benzoylcegonine (Cocaine Metabolite)	300	150
Cannabinoids (THC)	50	15
*Opiates	2000	10
Phencyclidine (PCP)	25	25

Confirmation screening is done by means of GC/MS analysis.

*The GC/MS confirmation for opiates will be for both codeine and morphine separately. If morphine is equal to or greater than 2,000ng/ml then the GC/MS confirmation analysis for 6- acetylmorphine (6-MAM) is at a cut-off level of 10ng/ml.

Alcohol Screening

All Project Personnel will be required to submit to an EBT under the random, post-accident, and reasonable suspicion test arenas, for the purpose of detecting presence of alcohol. If this test supports a positive result for presence of alcohol, the Project Personnel will be considered in violation of this Policy.

If the results of the EBT are:

1. Above 0.001 BrAC, but at or below 0.020 BrAC, a second test will be conducted within approximately 15 minutes.
 - If the second BrAC test is less than the first BrAC, the results will be deemed negative and the Project Personnel may return to work, if there are no other outstanding issues.
 - If the second BrAC is increasing, but below 0.04 BrAC, the results will be deemed negative, but the Project Personnel will be sent home for the day and the Construction Manager shall be notified. If a Project Personnel is sent home two times within a six-month period pursuant to this Section I, then any such Project Personnel shall be deemed to have tested positive and will be subject to the applicable remedies set forth in Section 2 below.
2. Above 0.02 BrAC, but below 0.06 BrAC, a second test will be conducted after approximately 15 minutes.

2020 NYC AGENCY RENOVATION PROJECT LABOR AGREEMENT

- Notwithstanding anything set forth above to the contrary, a Project Personnel may elect to voluntarily go home for the day instead of taking a second test and the results will be deemed negative, provided that any such Project Personnel may not voluntarily go home more than once within a twelve month period.
 - If the second BrAC test is at or below 0.02 BrAC, the results will be deemed negative and the Project Personnel may return to work if there are no other outstanding issues.
 - If the second BrAC test is above 0.020, but below 0.06, the results will be deemed positive, the Project Personnel will be sent home for the day and their site access will be revoked for at least five [5] calendar days and until such time as the Project Personnel has been evaluated by an EAP professional skilled in substance abuse and confirmed fit for duty.
 - Any Project Personnel who is deemed positive two times within two years pursuant to this Section 2 will have their site access privileges terminated and will be entitled to the limited relief set forth in Section 3 .4(c) of the Policy.
3. At or above .06 BrAC, the Project Personnel will have their site access privileges terminated, after which they will be entitled to the limited relief set forth in Section 3.4(C) of the Policy.

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
INFORMATION FOR BIDDERS
December 2021

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
INFORMATION FOR BIDDERS

TABLE OF CONTENTS

1.	Description and Location of Work	1
2.	Time and Place for Receipt of Bids	1
3.	Definitions	1
4.	Invitation For Bids and Contract Documents	1
5.	Pre-Bid Conference	1
6.	Agency Contact	1
7.	Bidder's Oath	1
8.	Examination and Viewing of Site, Consideration of Other Sources of Information and Changed Conditions	2
9.	Examination of Proposed Contract	2
10.	Form of Bid	2
11.	Irrevocability of Bid	3
12.	Acknowledgment of Amendments	3
13.	Bid Samples and Descriptive Literature	3
14.	Proprietary Information/Trade Secrets	3
15.	Pre-Opening Modification or Withdrawal of Bids	3
16.	Bid Evaluation and Award	3
17.	Late Bids, Late Withdrawals and Late Modifications	3
18.	Withdrawal of Bids.	3
19.	Mistake in Bids	4
20.	Low Tie Bids	4
21.	Rejection of Bids	5
22.	Right to Appeal Determinations of Non-Responsiveness or Non-Responsibility and Right to Protest Solicitations and Award	5
23.	Affirmative Action and Equal Employment Opportunity	5
25.	Complaints About the Bid Process	6
26.	Bid, Performance and Payment Security	6
27.	Failure to Execute Contract	7
28.	Bidder Responsibilities and Qualifications	7
29.	Employment Report	7
30.	Labor Law Requirements	8
31.	Insurance	8
32.	Lump Sum Contracts	8
33.	Unit Price Contracts	8

34.	Excise Tax	9
35.	Licenses and Permits	9
36.	Multiple Prime Contractors	9
37.	Locally Based Enterprise Requirements (LBE)	9
38.	Bid Submission Requirements	11
39.	Comptroller's Certificate	11
40.	Procurement Policy Board Rules	11
41.	DDC Safety Requirements	11

1. Description and Location of Work

The description and location of the work for which bids are requested are specified in the PASSPort RFX field "Description".

2. Time and Place for Receipt of Bids

Sealed bids shall be received on or before the date and hour specified in the PASSPort RFX, at which time they will be publicly opened and read aloud in the presence of the Commissioner or the Commissioner's or her representative, and any bidders who may desire to be present.

3. Definitions

The definitions set forth in the Procurement Policy Board Rules shall apply to this Invitation For Bids.

4. Invitation For Bids and Contract Documents

(A) Except for titles, sub-titles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience) the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of the Contract and the Invitation for Bids.

- (1) All provisions required by law to be inserted in this Contract, whether actually inserted or not
- (2) The Contract Drawings and Specifications
- (3) The General Conditions, the General Requirements and the Special Conditions, if any
- (4) The Contract
- (5) The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and the Bid Booklet
- (6) The Budget Director's Certificate; all Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed with the Work.

(B) For particulars as to this procurement, including quantity and quality of the purchase, extent of the work or labor to be performed, delivery and performance schedule, and any other special instructions, prospective bidders are referred to the Invitation For Bids Documents. A copy of such documents can be obtained in the PASSPort RFX.

5. Pre-Bid Conference

A pre-bid conference shall be held as set forth in the PASSPort RFX. Nothing stated at the pre-bid conference shall change the terms or conditions of the Invitation For Bids Documents, unless a change is made by written amendment as provided in Section 9 below. Failure to attend a mandatory pre-bid conference shall constitute grounds for the rejection of the bid.

6. Agency Contact

Any questions or correspondence relating to this bid solicitation shall be addressed to the Agency Contact person specified in the PASSPort RFX.

7. Bidder's Oath

- (A) The bid shall be properly signed by an authorized representative of the bidder and the bid shall be verified by the written oath of the authorized representative who signed the bid, that the several matters stated and information furnished therein are in all aspects true.
- (B) A materially false statement willfully or fraudulently made in connection with the bid or any of the forms completed and submitted with the bid may result in the termination of any Contract between the City and the Bidder. As a result, the Bidder may be barred from participating in future City contracts as well as be subject to possible criminal prosecution.

8. Examination and Viewing of Site, Consideration of Other Sources of Information and Changed Conditions

- (A) Pre-Bidding (Investigation) Viewing of Site - Bidders must carefully view and examine the site of the proposed work, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions on, about or above the site relating to or affecting in any way the performance of the work to be done under the Contract which were or should have been indicated to a reasonably prudent bidder. To arrange a date for visiting the work site, bidders are to contact the Agency Contact person specified in The PASSPort RFx.
- (B) Should the contractor encounter during the progress of the work subsurface conditions at the site materially differing from any shown on the Contract Drawings or indicated in the Specifications or such subsurface conditions as could not reasonably have been anticipated by the contractor and were not anticipated by the City, which conditions will materially affect the cost of the work to be done under the Contract, the attention of the Commissioner must be called immediately to such conditions before they are disturbed. The Commissioner shall thereupon promptly investigate the conditions. If the Commissioner finds that they do so materially differ, or that they could not reasonably have been anticipated by the contractor and were not anticipated by the City, the Contract may be modified with the Commissioner's written approval.

9. Examination of Proposed Contract

- (A) Request for Interpretation or Correction: Prospective bidders must examine the Contract Documents carefully and before bidding must request the Commissioner in writing for an interpretation or correction of every patent ambiguity, inconsistency or error therein which should have been discovered by a reasonably prudent bidder. Such interpretation or correction, as well as any additional contract provisions the Commissioner may decide to include, will be issued in writing by the Commissioner as an addendum to the Contract, which will be transmitted to each person recorded as having received a copy of the Contract Documents from the Department. Transmission of such addendum will be by mail, e-mail, facsimile or hand delivery. Such addendum will also be posted at the place where the Contract Documents are available for the inspection of prospective bidders. Upon transmission as provided for herein, such addendum shall become a part of the Contract Documents, and binding on all bidders, whether or not actual notice of such addendum is shown.
- (B) Only Commissioner's Interpretation or Correction Binding: Only the written interpretation or correction so given by the Commissioner shall be binding, and prospective bidders are warned that no other officer, agent or employee of the City is authorized to give information concerning, or to explain or interpret, the Contract.
- (C) Documents given to a subcontractor for the purpose of soliciting the subcontractor's bid shall include either a copy of the bid cover sheet or a separate information sheet setting forth the project name, the Contract number (if available), the contracting agency and the Project's location.

10. Form of Bid

Each bid must be submitted upon the prescribed form and must contain: a) the name, residence and place of business of the person or persons making the same; b) the names of all persons interested therein, and if no other person is so interested, such fact must be distinctly stated; c) a statement to the effect that it is made without any connection with any other person making a bid for the same purpose and that it is in all respects fair and without collusion or fraud; d) a statement that no Council member or other officer or employee or person whose salary is payable in whole or part from the City Treasury is directly or indirectly interested therein or in the supplies, materials or equipment and work or labor to which it relates, or in any portion of the profits thereof; e) a statement that the bidder is not in arrears to the City or to any agency upon a debt or contract or taxes, and is not a defaulter as surety or otherwise upon any obligation to the City to any agency thereof, except as set forth in the bid.

THE BID SHALL BE TYPEWRITTEN OR WRITTEN LEGIBLY IN INK. THE BID SHALL BE SIGNED IN INK. ERASURES OR ALTERATIONS SHALL BE INITIALED BY THE SIGNER IN INK. FAILURE TO CONFORM TO THE REQUIREMENTS OF THIS SECTION 10 SHALL RESULT IN THE REJECTION OF THE BID.

11. Irrevocability of Bid

The prices set forth in the bid cannot be revoked and shall be effective until the award of the Contract, unless the bid is withdrawn as provided for in Sections 15 and 18 below.

12. Acknowledgment of Amendments

The receipt of any amendment to the Contract Documents shall be acknowledged by the bidder in its bid submission.

13. Bid Samples and Descriptive Literature

Bid samples and descriptive literature shall not be submitted by the bidder, unless expressly requested elsewhere in the Contract or Contract Documents. Any unsolicited bid samples or descriptive literature which are submitted shall not be examined or tested and shall not be deemed to vary any of the provisions of this Contract.

14. Proprietary Information/Trade Secrets

- (A) The bidder shall identify those portions of the bid which it deems to be confidential, proprietary information or trade secrets, and provide justification why such materials shall not be disclosed by the City. All such materials shall be clearly indicated by stamping the pages on which such information appears, at the top and bottom thereof with the word "Confidential". Such materials stamped "Confidential" must be easily separable from the non-confidential sections of the bid.
- (B) All such materials so indicated shall be reviewed by the Agency and any decision not to honor a request for confidentiality shall be communicated in writing to the bidder. For those bids which are unsuccessful, all such confidential materials shall be returned to the bidder. Prices, makes and model or catalog numbers of the items offered, deliveries, and terms of payment shall be publicly available after bid opening, regardless of any designation of confidentiality made by the bidder.

15. Pre-Opening Modification or Withdrawal of Bids

Bids may be modified or withdrawn by written notice received in the office designated in the PASSPort RFx, before the time and date set for the bid opening. If a bid is withdrawn in accordance with this Section, the bid security, if any, shall be returned to the bidder.

16. Bid Evaluation and Award

In accordance with the New York City Charter, the Procurement Policy Board Rules and the terms and conditions of this Invitation For Bids, this Contract shall be awarded, if at all, to the responsible bidder whose bid meets the requirements and evaluation criteria set forth in the Invitation For Bids, and whose bid price is either the most favorable bid price or, if the Invitation For Bids so states, the most favorable evaluated bid price. A bid may not be evaluated for any requirement or criterion that is not disclosed in the Invitation For Bids.

Restriction: No negotiations with any bidder shall be allowed to take place except under the circumstances and in the manner set forth in Section 21. Nothing in this Section shall be deemed to permit a contract award to a bidder submitting a higher quality item than that designated in the Invitation For Bids, if that bid is not also the most favorable bid.

17. Late Bids, Late Withdrawals and Late Modifications

Any bid received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. Any request for withdrawal or modification received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. The exception to this provision is that a late modification of a successful bid that makes the bid terms more favorable to the City shall be considered at any time it is received.

18. Withdrawal of Bids.

Except as provided for in Section 15, above, a bidder may not withdraw its bid before the expiration of forty-five (45) days after the date of the opening of bids; thereafter, a bidder may withdraw its bid only in writing and in advance of an actual award. If within sixty (60) days after the execution of the Contract, the Commissioner fails to fix the date

for commencement of work by written notice to the bidder, the bidder at the bidder's option, may ask to be relieved of the bidder's obligation to perform the work called for by written notice to the Commissioner. If such notice is given to the Commissioner, and the request to withdraw is granted, the bidder waives all claims in connection with this Contract.

19. Mistake in Bids

(A) Mistake Discovered Before Bid Opening: A bidder may correct mistakes discovered before the time and date set for bid opening by withdrawing or correcting the bid as provided in Section 15 above.

(B) Mistakes Discovered Before Award

(1) In accordance with General Municipal Law (Section 103, subdivision 11), where a unilateral error or mistake is discovered in a bid, such bid may be withdrawn upon written approval of the Agency Chief Contracting Officer if the following conditions are met:

(a) The mistake is known or made known to the agency prior to the awarding of the Contract or within 3 days after the opening of the bid, whichever period is shorter; and

(b) The price bid was based upon an error of such magnitude that enforcement would be unconscionable; and

(c) The bid was submitted in good faith and the bidder submits credible evidence that the mistake was a clerical error as opposed to a judgment error; and

(d) The error in the bid is actually due to an unintentional and substantial arithmetic error or an unintentional omission of a substantial quantity of work, labor, material or services made directly in the compilation of the bid, which unintentional arithmetic error or unintentional omission can be clearly shown by objective evidence drawn from inspection of the original work paper, documents, or materials used in the preparation of the bid sought to be withdrawn; and

(e) It is possible to place the agency in the same position as existed prior to the bid.

(2) Unless otherwise required by law, the sole remedy for a bid mistake in accordance with this Article shall be withdrawal of the bid, and the return of the bid bond or other security, if any, to the bidder. Thereafter, the agency may, in its discretion, award the Contract to the next lowest bidder or rebid the Contract. Any amendment to or reformation of a bid or a Contract to rectify such an error or mistake therein is strictly prohibited.

(3) If the mistake and the intended correct bid are clearly evident on the face of the bid document, the bid shall be corrected to the intended correct bid and may not be withdrawn. Examples of mistakes that may be corrected are typographical errors, errors in extending unit prices, transposition errors and arithmetical errors.

20. Low Tie Bids

(A) When two or more low responsive bids from responsible bidders are identical in price, meeting all the requirements and criteria set forth in the Invitation For Bids, the Agency Chief Contracting Officer will break the tie in the following manner and order of priority:

(1) Award to a certified New York City small, minority or woman-owned business entity bidder;

(2) Award to a New York City bidder;

(3) Award to a certified New York State small, minority or woman-owned business bidder;

(4) Award to a New York State bidder.

(B) If two or more bidders still remain equally eligible after application of paragraph (A) above, award shall be made by a drawing by lot limited to those bidders. The bidders involved shall be invited to attend the drawing. A witness shall be present to verify the drawing and shall certify the results on the bid tabulation sheet.

21. Rejection of Bids

- (A) **Rejection of Individual Bids**: The Agency may reject a bid if:
- (1) The bidder fails to furnish any of the information required pursuant to Section 24 or 28 hereof; or if
 - (2) The bidder is determined to be not responsible pursuant to the Procurement Policy Board Rules; or if
 - (3) The bid is determined to be non-responsive pursuant to the Procurement Policy Board Rules; or if
 - (4) The bid, in the opinion of the Agency Chief Contracting Officer, contains unbalanced bid prices and is thus non-responsive, unless the bidder can show that the prices are not unbalanced for the probable required quantity of items, or if the imbalance is corrected pursuant to Section 15.
- (B) **Rejection of All Bids**: The Agency, upon written approval by the Agency Chief Contracting Officer, may reject all bids and may elect to resolicit bids if in its sole opinion it shall deem it in the best interest of the City so to do.
- (C) **Rejection of All Bids and Negotiation With All Responsible Bidders**: The Agency Head may determine that it is appropriate to cancel the Invitation For Bids after bid opening and before award and to complete the acquisition by negotiation. This determination shall be based on one of the following reasons:
- (1) All otherwise acceptable bids received are at unreasonable prices, or only one bid is received and the Agency Chief Contracting Officer cannot determine the reasonableness of the bid price, or no responsive bid has been received from a responsible bidder; or
 - (2) In the judgment of the Agency Chief Contracting Officer, the bids were not independently arrived at in open competition, were collusive, or were submitted in bad faith.
- (B) When the Agency has determined that the Invitation for Bids is to be canceled and that use of negotiation is appropriate to complete the acquisition, the contracting officer may negotiate and award the Contract without issuing a new solicitation, subject to the following conditions:
- (1) prior notice of the intention to negotiate and a reasonable opportunity to negotiate have been given by the contracting officer to each responsible bidder that submitted a bid in response to the Invitation for Bids;
 - (2) the negotiated price is the lowest negotiated price offered by a responsible bidder; and
 - (3) the negotiated price is lower than the lowest rejected bid price of a responsible bidder that submitted a bid in response to the Invitation for Bids.

22. Right to Appeal Determinations of Non-Responsiveness or Non-Responsibility and Right to Protest Solicitations and Award

The bidder has the right to appeal a determination of non-responsiveness or non-responsibility and has the right to protest a solicitation and award. For further information concerning these rights, the bidder is directed to the Procurement Policy Board Rules.

23. Affirmative Action and Equal Employment Opportunity

This Invitation For Bids is subject to applicable provisions of Federal, State and Local Laws and executive orders requiring affirmative action and equal employment opportunity.

24. PASSPort COMPLIANCE

All vendors that intend to do business with the City of New York must complete a disclosure process in order to be considered for a contract. This disclosure process was formerly completed using Vendor Information Exchange System (VENDEX) paper-based forms. The City of New York has moved collection of vendor disclosure information online. In early August 2017, the New York City Mayor's Office of Contract Services (MOCS) launched the Procurement and Sourcing Solutions Portal (PASSPort), a new online procurement system that replaced the paper-VENDEX process. In anticipation of awards, all bidders must create online accounts in the new PASSPort system, and

file all disclosure information using PASSPort. Paper submissions, including certifications of no changes to existing VENDEX packages, will not be accepted in lieu of complete online filings using PASSPort.

All vendors that intend to do business with the City, but specifically those that fall into any of the following categories, are required to enroll:

- Have a pending award with a City Agency; or
- Hold a current contract with a City Agency and have either an expiring VENDEX or expiring Certificate of No Change.

The Department of Design and Construction (DDC) and MOCS hereby notifies all proposers that the PASSPort system is available, and that disclosure filing completion is required prior to any award through this competitive bid.

To enroll in PASSPort and to access the PASSPort website (including online training), please visit www.nyc.gov/passport. Contact MOCS at passport@mocs.nyc.gov for additional information and technical support.

25. Complaints About the Bid Process

The New York City Comptroller is charged with the audit of contracts in New York City. Any vendor who believes that there has been unfairness, favoritism or impropriety in the bid process should inform the Comptroller, Office of Contract Administration, One Centre Street, Room 835, New York, New York; telephone number (212)669-2323.

26. Bid, Performance and Payment Security

(A) Bid Security: Each bid must be accompanied by bid security in an amount and type specified in the PASSPort RFX questionnaire. The bid security shall assure the City of New York of the adherence of the bidder to its proposal, the execution of the Contract, and the furnishing of Performance and Payment Bonds by the bidder, if required in the PASSPort RFX. Bid security shall be returned to the bidder as follows:

- (1) Within ten (10) days after the bid opening, the Comptroller will be notified to return the deposits of all but the three (3) lowest bidders. Within five (5) days after the award, the Comptroller will be notified to return the deposits of the remaining two unsuccessful bidders.
- (2) Within five (5) days after the execution of the Contract and acceptance of the Contractor's bonds, the Comptroller will be notified to return the bid security of the successful bidder or, if performance and payment bonds are not required, only after the sum retained under Article 21 of the Contract equals the amount of the bid security.
- (3) Where all bids are rejected, the Comptroller will be notified to return the deposit of the three (3) lowest bidders at the time of rejection.

(B) Performance and Payment Security: Performance and Payment Security must be provided in an amount and type specified in the PASSPort RFX. The performance and payment security shall be delivered by the contractor prior to or at the time of execution of the Contract. If a contractor fails to deliver the required performance and payment security, its bid security shall be enforced, and an award of Contract may be made to the next lowest responsible and responsive bidder, or the contract may be rebid.

(C) Acceptable Types of Security: Acceptable types of security for bids, performance, and payment shall be limited to the following:

- (1) a one-time bond in a form satisfactory to the City;
- (2) a bank certified check or money order;
- (3) obligations of the City of New York; or
- (4) other financial instruments as determined by the Office of Construction in consultation with the Comptroller.

Whenever the successful bidder deposits obligations of the City of New York as performance and payment security, the Comptroller may sell and use the proceeds thereof for any purpose for which the principal or

surety on such bond would be liable under the terms of the Contract. If the money is deposited with the Comptroller, the successful bidder shall not be entitled to receive interest on such money from the City.

- (D) Form of Bonds: Security provided in the form of bonds must be prepared on the form of bonds authorized by the City of New York. Forms for bid, performance, and payment bonds are included in the Invitation for Bids Documents. Such bonds must have as surety thereunder such surety company or companies as are: (1) approved by the City of New York; (2) authorized to do business in the State of New York, and (3) approved by the Department of the Treasury of the United States. Premiums for any required bonds must be included in the base bid.

The bidder is advised that submission of a bid bond where the surety on such bond fails to meet the criteria set forth herein, shall result in the rejection of the bid as non-responsive.

The Department of the Treasury of the United States advises that information concerning approved surety companies may be obtained as follows: (1) from the Government Printing Office at 215-364-6465; (2) through the Internet at <https://www.fiscal.treasury.gov/surety-bonds/>.

- (E) Power of Attorney: Attorneys in fact who sign bid, performance, or payment bonds must file with each bond a certified copy of their power of attorney to sign said bonds.

27. Failure to Execute Contract

In the event of failure of the successful bidder to execute the Contract and furnish the required security within ten (10) days after notice of the award of the Contract, the deposit of the successful bidder or so much thereof as shall be applicable to the amount of the award made shall be retained by the City, and the successful bidder shall be liable for and hereby agrees to pay on demand the difference between the price bid and the price for which such Contract shall be subsequently awarded, including the cost of any required reletting and less the amount of such deposit. No plea of mistake in such accepted bid shall be available to the bidder for the recovery of the deposit or as a defense to any action based upon such accepted bid. Further, should the bidder's failure to comply with this Section cause any funding agency, body or group (Federal, State, City, Public, Private, etc.) to terminate, cancel or reduce the funding on this project, the bidder in such event shall be liable also to the City for the amount of actual funding withdrawn by such agency on this project, less the amount of the forfeited deposit.

28. Bidder Responsibilities and Qualifications

- (A) Bidders must include with their bids all information necessary for a determination of bidder responsibility, as set forth in the Specifications.
- (B) The Agency may require any bidder or prospective bidder to furnish all books of account, records, vouchers, statements or other information concerning the bidder's financial status for examination as may be required by the Agency to ascertain the bidder's responsibility and capability to perform the Contract. If required, a bidder must also submit a sworn statement setting forth such information as the Agency may require concerning present and proposed plant and equipment, the personnel and qualifications of the bidder's working organizations, prior experience and performance record.
- (C) Oral Examination on Qualifications: In addition thereto, and when directed by the Agency, the bidder, or a responsible officer, agent or employee of the bidder, must submit to an oral examination to be conducted by the Agency in relation to the bidder's proposed tentative plan and schedule of operations, and such other matters as the Agency may deem necessary in order to determine the bidder's ability and responsibility to perform the work in accordance with the Contract. Each person so examined must sign and verify a stenographic transcript of such examination noting thereon such corrections as such person may desire to make.
- (D) If the bidder fails or refuses to supply any of the documents or information set forth in paragraph (B) hereof or fails to comply with any of the requirements thereof, the Agency may reject the bid.

29. Employment Report

In accordance with Executive Order No. 50 (1980) as modified by Executive Order 108 (1986), the filing of a

completed Employment Report (ER) is a requirement of doing business with the City of New York for construction contractors with contracts of \$1,000,000 or more and subcontractors with construction subcontracts of \$750,000 or more. The required forms and information are included in the PASSPort Vendor Profile.

30. Labor Law Requirements

- (A) General: The successful bidder will be required to comply strictly with all Federal, State and local labor laws and regulations.
- (B) New York State Labor Law: This Contract is subject to New York State Labor Law Section 220, which requires that construction workers on the site be paid prevailing wages and supplements. The Contractor is reminded that all wage provisions of this Contract will be enforced strictly and failure to comply will be considered when evaluating performance. Noncompliance may result in the contractor being debarred by the City from future contracts. Complaints filed with the Comptroller may result in decisions which may debar a contractor from bidding contracts with any state governmental entity and other political subdivisions.
- (C) Records: The Contractor is expected to submit accurate payroll reports and other required documents and verify attendance and job classifications being utilized in compliance with the law, Contract provisions and agency procedures.

31. Insurance

- (A) Bidders are advised that the insurance requirements contained herein are regarded as material terms of the Contract. As required by Article 22 of the Contract, the contractor must effect and maintain with companies licensed and authorized to do business in the State of New York, the types of insurance set forth therein, when required by and in the amounts set forth in Schedule A of the General Conditions. Such required insurance must be provided from the date the contractor is ordered to commence work and up to the date of final acceptance of all required work.
- (B) The contractor must, within ten days of receipt of the notice of award, submit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A of the General Conditions, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by Section 57 of the New York State Workers' Compensation Law and Section 220 of the Disability Benefits Law.

32. Lump Sum Contracts

- (A) Comparison of Bids: Bids on Lump Sum Contracts will be compared on the basis of the lump sum price bid, adjusted for alternate prices bid, if any.
- (B) Lump Sum Bids for "General Construction Work" which include excavation shall include all necessary excavation work defined in the Specifications as being included in the lump sum bid. The bidder shall also bid a unit price for the additional cost of excavating material which is defined in the Specifications as excavation for which additional payment will be made. The total estimated additional cost of removing such material will be taken as the quantity set forth in the Engineer's Estimate multiplied by the unit price bid. This total estimated cost of additional excavation shall be added to the lump sum bid for the General Construction Work for the purpose of comparing bids to determine the low bidder.
- (C) Variations from Engineer's Estimate: The Engineer's Estimate of the quantity of excavation for which additional payment will be made is approximate only and is given solely to be used as a uniform basis for the comparison of bids and such estimate is not to be considered as part of this contract. The quantities actually required to complete the contract work may be more or less than the quantities in the Engineer's Estimate and, if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

33. Unit Price Contracts

- (A) Comparison of Bids: Bids on Unit Price Contracts will be compared on the basis of a total estimated price,

arrived at by taking the sum of the estimated quantities of such items, in accordance with the Engineer's Estimate of Quantities set forth in the Bid Schedule, multiplied by the corresponding unit prices, and including any lump sum bids on individual items.

(B) Variations from Engineer's Estimate: Bidders are warned that the Engineer's Estimate of Quantities on the various items of work and materials is approximate only, given solely to be used as a uniform basis for the comparison of bids, and is not be considered part of this contract. The quantities actually required to complete the contract work may be less or more than so estimated, and if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

(C) Overruns: The terms and conditions applicable to overruns of unit price items are set forth in Article 26 of the Contract.

34. Excise Tax

Bidders are referred to the Specifications for information on Federal Excise Tax exemptions.

35. Licenses and Permits

The successful bidder will be required to obtain all necessary licenses and permits necessary to perform the work.

36. Multiple Prime Contractors

If more than one prime contractor will be involved on this project, all contractors are required to examine the Invitation for Bid packages for all other parts of the project.

37. Locally Based Enterprise Requirements (LBE)

This Contract is subject to the requirements of Administrative Code, Section 6-108.1, and the regulations promulgated thereunder. No construction contract will be awarded unless and until these requirements have been complied with in their entirety. The bidder is advised of the provisions set forth below, as well as the provisions with respect to the Locally Based Enterprise Program contained in Article 67 of the Contract. The contractor is advised that:

(A) If any portion of the Contract is subcontracted, not less than ten percent of the total dollar amount of the contract shall be awarded to locally based enterprises ("LBEs"); except, where less than ten percent of the total dollar amount of the Contract is subcontracted, such lesser percentage shall be so awarded.

(B) No contractor shall require performance and payment bonds from LBE subcontractors.

(C) No Contract shall be awarded unless the contractor first identifies in its bid:

(1) the percentage, dollar amount and type of work to be subcontracted; and

(2) the percentage, dollar amount and type of work to be subcontracted to LBEs.

(D) Within ten calendar days after notification of low bid, the apparent low bidder shall submit an "LBE Participation Schedule" to the contracting agency. If such schedule does not identify sufficient LBE subcontractors to meet the requirements of Administrative Code Section 6-108.1, the apparent low bidder shall submit documentation of its good faith efforts to meet such requirements.

(1) The "LBE Participation Schedule" shall include:

(a) the name and address of each LBE that will be given a subcontract,

(b) the percentage, dollar amount and type of work to be subcontracted to the LBE, and

(c) the dates when the LBE subcontract work will commence and end.

(2) The following documents shall be attached to the "LBE Participation Schedule":

(a) verification letters from each subcontractor listed in the "LBE Participation Schedule" stating that the LBE will enter into a formal agreement for work,

- (b) certification documents of any proposed LBE subcontractor which is not on the LBE certified list, and
 - (c) copies of the certification letter of any proposed subcontractor which is an LBE.
- (3) Documentation of good faith efforts to achieve the required LBE percentage shall include as appropriate but not limited to the following:
- (a) attendance at prebid meetings, when scheduled by the agency, to advise bidders of contract requirements;
 - (b) advertisement where appropriate in general circulation media, trade association publications and small business media of the specific subcontracts that would be at least equal to the percentage goal for LBE utilization specified by the contractor;
 - (c) written notification to association of small, minority and women contractors soliciting specific subcontractors;
 - (d) written notification by certified mail to LBE firms that their interest in the contract is solicited for specific work items and their estimated values;
 - (e) demonstration of efforts made to select portions of the work for performance by LBE firms in order to increase the likelihood of achieving the stated goal;
 - (f) documented efforts to negotiate with LBE firms for specific subcontracts, including at a minimum:
 - (i) The names, address and telephone numbers of LBE firms that are contacted;
 - (ii) A description of the information provided to LBE firms regarding the plans and specifications for portions of the work to be performed;
 - (iii) Documentation showing that no reasonable price can be obtained from LBE firms;
 - (iv) A statement of why agreements with LBE firms were not reached;
 - (g) a statement of the reason for rejecting any LBE firm which the contractor deemed to be unqualified; and
 - (h) documentation of efforts made to assist the LBE firms contacted that needed assistance in obtaining required insurance.
- (E) Unless otherwise waived by the Commissioner with the approval of the Office of Economic and Financial Opportunity, failure of a proposed contractor to provide the information required by paragraphs (C) and (D) above may render the bid non-responsive and the Contract may not be awarded to the bidder. If the contractor states that it will subcontract a specific portion of the work, but can demonstrate despite good faith efforts it cannot achieve its required LBE percentage for subcontracted work until after award of Contract, the Contract may be awarded, subject to a letter of compliance from the contractor stating that it will comply with Administrative Code Section 6-108.1 and subject to approval by the Commissioner. If the contractor has not met its required LBE percentage prior to award, the contractor shall demonstrate that a good faith effort has been made subsequent to award to obtain LBEs on each subcontract until it meets the required percentage.
- (F) When a bidder indicates prior to award that no work will be subcontracted, no work may be subcontracted without the prior written approval of the Commissioner, which shall be granted only if the contractor in good faith seeks LBE subcontractors at least six weeks prior to the start of work.
- (G) The contractor may not substitute or change any LBE which was identified prior to award of the contract without the written permission of the Commissioner. The contractor shall make a written application to the Commissioner for permission to make such substitution or change, explaining why the contractor needs to change its LBE subcontractor and how the contractor will meet its LBE subcontracting requirement. Copies of such application must be served on the originally identified LBE by certified mail return receipt requested,

as well as the proposed substitute LBE. The Commissioner shall determine whether or not to grant the contractor's request for substitution.

38. Bid Submission Requirements

The Bid Submission Requirements are set forth in the PASSPort RFx.

39. Comptroller's Certificate

This Contract shall not be binding or of any force unless it is registered by the Comptroller in accordance with Section 328 of the City Charter and the Procurement Policy Board Rules. This Contract shall continue in force only after annual appropriation of funds by the City of New York and certification as hereinabove set forth.

40. Procurement Policy Board Rules

This Invitation For Bids is subject to the Rules of the Procurement Policy Board of the City of New York. In the event of a conflict between said Rules and a provision of this Invitation For Bids, the Rules shall take precedence.

41. DDC Safety Requirements

The DDC Safety Requirements apply to the work to be performed pursuant to the Contract. The DDC Safety Requirements are set forth on the following pages.

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
SAFETY REQUIREMENTS FOR CONSTRUCTION
CONTRACTS

January 2020

THE DDC SAFETY REQUIREMENTS FOR CONSTRUCTION CONTRACTS INCLUDE THE FOLLOWING SECTIONS:

- I. POLICY ON SITE SAFETY**
- II. PURPOSE**
- III. DEFINITIONS**
- IV. RESPONSIBILITIES**
- V. SAFETY QUESTIONNAIRE**
- VI. SITE SAFETY PLAN**
- VII. KICK-OFF/PRE-CONSTRUCTION MEETINGS AND SAFETY REVIEW**
- VIII. EVALUATION DURING WORK IN PROGRESS**
- IX. SAFETY PERFORMANCE EVALUATION**

I. POLICY ON SITE SAFETY

The City of New York Department of Design and Construction (DDC) is committed to a policy of injury and illness prevention and risk management for construction work that will ensure the safety and health of the workers engaged in the projects and the protection of the general public. Therefore, it is DDC's policy that work carried out by Contractors on DDC contracts must, at a minimum, comply with the most current versions of all applicable federal, state and city laws, rules, and regulations, including without limitation:

- ❑ Code of Federal Regulations, Title 29, Part 1926 (29 CFR 1926) and applicable Sub-parts of Part 1910 – U.S. Occupational Safety and Health Administration (OSHA);
- ❑ Federal Highway Administration – Manual on Uniform Traffic Control Devices (MUTCD);
- ❑ New York Codes, Rules and Regulations (NYCRR), Title 12, Part 23 – Protection in Construction, Demolition and Excavation Operations;
- ❑ New York Codes, Rules and Regulations (NYCRR), Title 16, Part 753 – Protection of Underground Facilities;
- ❑ New York City Administrative Code, Title 28 – New York City Construction Codes;
- ❑ Rules of the City of New York, Title 15, Chapter 13 – Rules Pertaining To the Prevention of the Emission of Dust from Construction Related Activities;
- ❑ Rules of the City of New York, Title 15, Chapter 28 – Citywide Construction Noise Mitigation;
- ❑ Rules of the City of New York, Title 34 Chapter 2 – NYCDOT Highway Rules.

The Contractor will be required to comply with all new and/or revised federal, state and city laws, rules, and regulations, issued during the course of the project, at the expense of the Contractor without any additional costs to the DDC.

II. PURPOSE

The purpose of this policy is to ensure that Contractors perform their work and supervise their employees in accordance with all applicable federal, state and city rules and regulations. Further, Contractors will be expected to minimize or eliminate jobsite and public hazards, through a planning, inspection, auditing and corrective action process. The goal is to control risks so that injuries, illnesses, and accidents to contractors' employees, DDC employees and the general public, as well as damage to city-owned and private property, are reduced to the lowest level feasible.

III. DEFINITIONS

Agency Chief Contracting Officer (ACCO): The ACCO will mean the person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the City Chief Procurement Officer (CCPO).

Competent Person: As defined by OSHA, an individual who is capable of identifying existing and predictable hazards in the surroundings or working conditions that are unsanitary, hazardous, or dangerous to employees or the general public, and who has authorization to take prompt corrective measures to eliminate them. This individual will have completed, at a minimum an authorized 30-hour OSHA Construction Safety Course. The Contractor may be required to provide more than one competent person due to construction operations and based on the number of active work sites.

Construction Safety Auditor: A representative of the Office of Construction Safety who provides inspection and assessment services to enhance health and safety on all DDC construction projects. The activities of the Construction Safety Auditor include performing site audits, reviewing safety plans, reviewing construction permits, drawings, verifying Contractor's compliance with applicable federal, state and city laws, rules, regulations, and DDC Contract Safety Requirements, etc. and rendering technical advice and assistance to DDC Resident Engineers and Project Managers.

Office of Construction Safety: A unit of DDC Safety and Site Support that assesses contractor’s safety on DDC jobsites and advises responsible parties of needed corrective actions.

Registered Construction Superintendent: For certain projects, as defined in New York City Construction Codes – Title 28, the contractor will provide a Construction Superintendent registered with the NYC Department of Buildings and responsible for all duties as defined in Chapter 33 of Title 1 of the Rules of the City of New York.

Contractor: For purposes of these Safety Requirements, the term “Contractor” will mean any person or entity that enters into a contract for the performance of construction work on a DDC project. The term “Contractor” will include any person or entity which enters into any of the following types of contracts: (1) a prime construction contract for a specific project, (2) a prime construction contract using the Job Order Contracting System (“JOCS Contract”), and (3) a subcontract with a CM/Builder (“First Tier Subcontract”).

Daily Safety Job Briefing: Daily jobsite safety briefings, given to all jobsite personnel at project site by the Contractor before work begins and/or if hazards or potential hazards are discovered while working, with the purpose of discussing the scheduled activities for the day, the hazards related to these activities, activity specific safety procedures, and Job Hazard Analysis associated with the scheduled construction work. Daily jobsite briefings will be documented, available at the jobsite, and will include at a minimum, topics, name and signature of the person conducting the briefing session, names and signatures of attendants, name of the designated competent person, contractor’s name, DDC Project ID, date, time, and location.

Director – Office of Construction Safety: Responsible for the operations of the Office of Construction Safety and the DDC Site Safety management programs.

Job Hazard Analysis (JHA): A process of identifying the major job tasks and any potential site-specific hazards that may be present during construction and establishing the means and methods to eliminate or control those hazards. A JHA will be documented, available at the jobsite and will include at a minimum work tasks, being performed, identified hazards, control methods for the identified hazards, contractor’s name, DDC Project ID, location, date, name and signature of certifying person. A JHA is a living document that will be re-evaluated and revised to address new hazards and tasks that may develop and will be present at the worksite and produced upon request.

Qualified Person: As defined by OSHA, an individual who, by possession of a recognized degree, certificate, license, or professional standing, or who by extensive knowledge, training, and experience, has successfully demonstrated his or her ability to solve problems relating to the subject matter, the work, or the project. Qualified Persons are required under regulation to address issues pertaining, but without limit, to fall protection, scaffold design, maintenance and protection of traffic, and excavation protective system, among others.

Project Site: Those areas indicated in the Contract Documents where the Work is to be performed.

Project Safety Representative: The designated Project Safety Representative will have at a minimum an OSHA 30-hour Construction Safety Course and other safety training applicable to Contractor’s/subcontractor’s project work. This individual will be responsible to oversee safety performance of the required construction work, conduct documented daily safety inspections, and implement corrective actions to maintain a safe work site. The Project Safety Representative must have sufficient experience and skills necessary to thoroughly understand the health and safety hazards and controls and must have authority to undertake corrective actions. A dedicated full-time Project Safety Representative may be required on large projects and projects deemed by DDC to be particularly high risk. DDC reserves the right to request a dedicated full-time Project Safety Representative for any reason at any time during the course of the project at the expense of the Contractor without any additional costs to the DDC. The full-time Project Safety Representative will be present at the site during all work activities.

Resident Engineer (“RE”): Representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the work. The RE may be a consultant retained by DDC, including a Construction Management (CM) or Resident Engineer Inspection (REI) firm. If DDC has retained a CM, REI or other consultant firm to perform management and oversight for the Project (e.g., CM-Builder, CM-Design-Builder, Project Manager, Program Manager), that CM, REI or other consultant is the Resident Engineer for purposes of these Safety Requirements.

Safety Questionnaire: Used by DDC to evaluate Contractor’s current and past safety performance. It is required to be completed by all Contractors initially when submitting bids for Construction work, or when being pre-qualified and updated annually or as requested by the DDC.

Site Safety Manager: For certain projects, as defined in New York City Construction Codes – Title 28, the Contractor will provide a Site Safety Manager with a Site Safety Manager License issued by the New York City Department of Building.

Site Safety Plan: A site-specific safety plan developed by the Contractor for a DDC project. The Site Safety Plan will identify the project work scope, identify hazards associated with the project work and include project specific safety procedures and training appropriate and necessary to complete the work. The Site Safety Plan will be submitted within 30 days from the Award Date or as otherwise directed and is subject to review and acceptance by the Office of Construction Safety prior to the commencement of work at the site.

Unsafe or Unhealthy Condition: A condition that could be potentially hazardous to the health and safety of personnel or the public, and/or damaging to equipment, machinery, property, or the environment.

Weekly Safety Meetings: Weekly jobsite safety meetings, given to all jobsite personnel by Contractor, with the purpose of discussing general safety topics and job specific requirements encountered at the DDC work site. Weekly safety meetings will be documented and will include at a minimum, topics, name and signature of the person conducting the meeting, names and signatures of attendees, contractor’s name, DDC Project ID, date, and location.

Work: The construction required by the Contractor’s Contract Documents whether completed or partially completed, performed by the Contractor/ subcontractors. Work refers to the furnishing of labor, furnishing and incorporating materials and equipment into the construction and providing any service required by the Contract Documents to fulfill the Contractor’s obligation to complete the Project. For the purposes of these Safety Requirements, the term “Work” includes all Utility Interference work (commonly referred to as “Section U”, “EP-7”, and “Joint Bid” work) performed in association with this Contract.

IV. RESPONSIBILITIES

All persons who manage, perform, and provide support for construction projects will conduct operations in compliance with the requirements identified in this Policy and all applicable governing regulatory agency requirements and guidelines pertaining to safety in construction.

A. Resident Engineer

1. Review and facilitate Contractor(s) Site Safety Plan submittals to DDC for acceptability.
2. Notify the Office of Construction Safety of the commencement of construction work.
3. Develop and implement a training verification process to ensure that all CM/REI, consultant, Contractor, and subcontractor employees are properly trained. Maintain all applicable initial and refresher training records and assures documentation availability on site.
4. Maintain documentation of and attend weekly safety meetings and daily safety job briefings.
5. Assure that Contractor(s) JHA’s are current to reflect the work tasks being performed, hazards, and control methods to mitigate the identified hazards. Verify that all employees at the job site are trained on the JHAs and maintain supporting documentation on site.
6. Assure adequate planning for all critical construction activities (crane operation, excavation, confined space entry, etc.) including coordination between Contractor(s) /DDC/ other Agencies as required.
7. Maintain custody of all construction related permits, plans, approvals, drawings, etc., related to the project and assure their availability on site.
8. Recognize, minimize, or eliminate jobsite and public hazards, through required planning, inspection, verification, and corrective action process.
9. Monitor the conditions at the site for conformance with the Contractor’s Site Safety Plan, DDC policies, permits, and all applicable regulations and documentation that pertain to construction safety.
10. Notify the Contractor and DDC immediately upon determination of any condition or activity existing which is not in compliance with the Contractor’s Site Safety Plan, applicable federal, state or local codes or any

condition that presents a potential risk of injury to the public or workers or possible damage to property. Direct the Contractor to provide such labor, materials, equipment, and supervision to remedy such conditions.

11. Notify the Office of Construction Safety and the ACCO's Insurance and Risk Management Unit of project-related accidents, incidents, and near misses as per DDC's Construction Safety Emergency and Accident Notification and Response Procedure within two (2) hours.
12. In case of an accident, incident, or near miss, RE is responsible to protect the integrity of the accident site including but not limited to: the safeguarding of all evidence, documentation of all personnel on site at the time of the accident, gather facts related to all accidents, incidents, or near miss, and prepare required DDC Construction Accident Report as per DDC's Construction Safety Emergency and Accident Notification and Response Procedure. Maintain all records pertaining to accidents, incidents, and near miss and have them available upon request.
13. Notify the Office of Construction Safety within two (2) hours of the start of an inspection by any outside/regulatory agency personnel, including NYS, OSHA, NYC DOB or any other City/State/Federal oversight entity and forward a copy of the inspection report within one business day of its receipt.
14. Escort and assist Construction Safety Auditors during all field and record audits.
15. Report any emergency conditions to the Office of Construction Safety immediately.

Note: In addition to the responsibilities listed above, if the Resident Engineer is a CM/REI or other non-City party hired by the City to manage the Project, the Resident Engineer is also required to do the following:

16. Provide personnel who are certified and or trained appropriately for the requirements of the project.
17. Perform an investigation for any project-related accidents, incidents, and near misses. Within 24-hours of the time of the accident, incident, or near miss, the CM/REI will submit an investigation report to the Office of Construction Safety. Such report will include proposed remedial measures and implementation of corrective actions to prevent recurrence.

DDC reserves the right to request that the CM/REI replace any CM/REI personnel for any reason at any time during the project.

B. Construction Contractors

Note: For CM-Build and CM-Design-Build Projects, the CM will meet all requirements listed in this section, as well as the Resident Engineer section above.

1. Submit a completed Safety Questionnaire and other safety performance related documentation with its bid or as part of a pre-qualification package.
2. Submit a Site Safety Plan within 30 days from the Award Date or as otherwise directed. The Site Safety Plan is subject to review and acceptance by the Office of Construction Safety prior to the commencement of work at the site. The Site Safety Plan will be revised and updated as necessary during the course of the project. If requested by the Office of Construction Safety, the Site Safety Plan must be developed and submitted for approval using a web-based system, the Site Safety Plan Application (SSP App).
3. Designate and identify a Project Safety Representative in the Site Safety Plan. The Contractor will immediately notify the Office of Construction Safety, in a form and manner acceptable to the Office of Construction Safety, of any permanent change to the designated Project Safety Representative. In the event the primary designated Project Safety Representative is temporary unable to perform his or her duties, an alternate Project Safety Representative will be provided. Resumes, outlining the qualification and experience for the Project Safety Representative (s) will be included in the Site Safety Plan and available upon request. DDC reserves the right to request the Contractor to replace a Project Safety Representative for any reason at any time during the course of the project.
4. Designate and identify a Competent Person(s) in the Site Safety Plan. Contractor/subcontractor may be required to provide more than one competent person due to construction operations and based on a number of work tasks/areas. DDC reserves the right to request the Contractor to replace a Competent Person or provide additional Competent Person(s) for any reason at any time during the course of the project. The Competent Person will be present at the site during all work activities.
5. For certain projects, as defined in New York City Construction Codes – Title 28, designate and identify the Licensed Site Safety Manager or Registered Construction Superintendent. Resumes, outlining the qualification and experience for the Licensed Site Safety Manager or Registered Construction Superintendent will be included in the Site Safety Plan and available upon request. The Contractor will immediately notify the Office

of Construction Safety, in a form and manner acceptable to the Office of Construction Safety, of any permanent change to the designated Site Safety Manager and/or Construction Superintendent. In the event the primary designated Site Safety Manager or Construction Superintendent is temporarily unable to perform his or her duties, an alternate Licensed Site Safety Manager and/or Registered Construction Superintendent will be provided. The Office of Construction Safety must be informed of such change. DDC reserves the right to request the Contractor to replace Site Safety Manager or Construction Superintendent for any reason at any time during the course of the project.

6. Develop a written Job Hazard Analysis (JHA) that identifies safety hazards and control methods for project specific work tasks. A preliminary JHA will be included in the Site Safety Plan submitted by the Contractor. A JHA is a living document that will be re-evaluated and revised to address new hazards and tasks that may develop during the course of the project and will be present at the worksite and produced upon request.
7. Develop project specific safety procedures to protect employees, general public, and property during all construction activities for the duration of the project.
8. Ensure that all employees are aware of the hazards associated with the project through documented formal and informal training and/or other communications. Conduct and document new employee and site-specific safety orientation for all Contractor and subcontractor personnel to review the hazards associated with the project as identified in the Site Safety Plan and the specific safety procedures and controls that will be used to protect workers, the general public and property. The Project Safety Representative will conduct this training prior to mobilization and if necessary during the course of the project. Documentation will be provided to the RE.
9. Prior to performing any work on DDC projects all Contractor's and subcontractor's employees will, at a minimum, have successfully completed, within the previous five calendar years, an OSHA 10-hour construction safety course.
All training records (OSHA 10-hour, flagger, scaffold, fall protection, confined space, etc.) will be provided to the RE prior to mobilization, included in the Site Safety Plan, kept current during the course of the project, and available for review.
10. Conduct and document weekly safety meetings and daily job briefing sessions for the duration of the project. Attendance at weekly safety meetings and daily job briefing sessions is mandatory. A written record of weekly safety meetings will be available upon request and job briefing sessions will be available at the worksite.
11. As part of the Site Safety Plan, prepare site specific procedures, such as maintenance and protection of traffic plan, steel erection plan, confined space program, fall protection plan, demolition plan, site specific emergency evacuation plan, etc. (if not otherwise provided in the contract documents) and comply with all of its provisions.
12. Have immediately available for review at the project site where actual construction activities are being performed all applicable documentation, including but not limited to: JHAs for work tasks being performed, all required training records, MPT plan (where applicable), Noise and Dust Mitigation Plans, excavation protective system drawings (where applicable), Emergency Evacuation plan, fall protection program (where applicable), confined space program (where applicable), all required permits, daily job briefing records, all required documentation for crane operation (where applicable), daily inspection checklist, scaffold and sidewalk drawings (when applicable), safety data sheets for chemicals in use.
13. Comply with all federal, state and local safety and health rules, laws, and regulations.
14. Comply with all provisions of the Site Safety Plan.
15. Provide, replace, and adequately maintain at or around the project site, suitable and sufficient signage, lights, barricades and enclosures (fences, sidewalk sheds, netting, bracing, etc.). The project specific MPT plan will be developed, implemented, and reviewed during the course of the project.
16. The Project Safety Representative will conduct daily safety inspections, document the inspection results, implement corrective actions for the identified hazards. Maintain the inspection records and have them available upon request.
17. **Report unsafe or unhealthy conditions to the RE as soon as practical, but no more than 24 hours after discovery, and take prompt actions to remove or abate such conditions. Should an imminent dangerous condition be discovered, Contractor will stop all work in the area of danger until corrections are made.**
18. Report all accidents, incidents and near misses involving injuries to workers or the general public, as well as property damage, to the RE within one (1) hour.
19. Following an accident or incident, unless otherwise directed, the Contractor will not remove or alter any equipment, structure, material, or evidence related to the accident or incident. Exception: Immediate emergency procedures taken to secure structures, temporary construction, operations, or equipment that pose a continued imminent danger or facilitate assistance for persons who are trapped or who have sustained bodily injury. Take

additional measures as necessary to secure the accident or incident site and to protect against any further injury or property damage.

20. The Contractor will perform an investigation into the root cause of the accident, incident, or near miss. Within 24 hours of an accident, incident, or near miss, the Contractor will prepare and submit to the RE a written investigation report detailing findings, corrective actions, and hazard mitigation implementation to prevent recurrence.
21. Notify the RE within two (2) hours of the start of an inspection by any outside regulatory agency personnel, including OSHA, NYC DOB, or others.
22. Maintain all records pertaining to all required safety compliance documents, accidents and incidents reports. DDC reserves the right to request copy of any records pertaining to the safety of the project and required by DDC and other federal, state, and city agencies, including but not limited to permits, training records, safety inspection records, drawings, equipment records, etc.
23. Cooperate with DDC Office of Construction Safety/ RE and address DDC recommendations on safety, which will in no way relieve the Contractor of its responsibilities for safety on the project. The Contractor has sole responsibility for safety.

V. SAFETY QUESTIONNAIRE

DDC requires that all Contractors provide information regarding their current and past safety performance and programs. This will be accomplished by the use of the DDC Safety Questionnaire. As a part of the bid submittal package, the contractor will submit a completed DDC Safety Questionnaire listing company workers' compensation experience modification rating and OSHA Incident Rates for the three (3) years prior to the date of the bid opening. DDC may request a Contractor to update its Questionnaire at any time or to provide more detailed information. The Contractor will provide the requested information within 15 days.

The following criteria will be used by DDC in reviewing the Contractor's responsibility, which will be based on the information provided on the questionnaire:

- Criteria 1: OSHA Injury and Illness Rates (I&IR) are no greater than the average for the industry (based on the most current Bureau of Labor Statistics data for the Contractors SIC code); and
- Criteria 2: Insurance workers compensation Experience Modification Rate (EMR) equal to or less than 1.0; and
- Criteria 3: Any willful violations issued by OSHA or NYC DOB within the last three (3) years; and
- Criteria 4: A fatality (worker or member of public) and injuries, requiring OSHA notification, experienced on or near Contractor's worksite within the last three (3) years; and
- Criteria 5: Past safety performance on DDC projects (accidents; status of site safety plan submittals; etc.)
- Criteria 6: OSHA violation history for the last three (3) years;
- Criteria 7: Contractor will provide OSHA Injury and Illness Records (currently OSHA 300 and 300A Logs) for the last three (3) years.

If the Contractor fails to meet the basic criteria listed above, the Office of Construction Safety may request, through the ACCO, more details concerning the Contractor's safety experience. DDC may request the Contractor to provide copies of, among other things, accident investigation reports, OSHA records, OSHA and NYC DOB citations, EPA citations and written corrective action plan.

VI. SITE SAFETY PLAN

Within thirty (30) days from the Award Date or as otherwise directed, the Contractor will submit the Site Safety Plan. The Site Safety Plan will identify project work scope, safety hazards associated with the project tasks, and include specific safety procedures and training appropriate and necessary to complete the work. The Site Safety Plan is subject to review and acceptance by the Office of Construction Safety prior to the commencement of work at the site. Due to the project work scope and project duration, the Office of Construction Safety may grant a conditional acceptance for a Site Safety Plan without all sections being complete. In a case of a "Conditional Acceptance" of a Site Safety Plan,

the Contractor will provide the remaining sections previously incomplete and/or not submitted for review and acceptance by the Office of Construction Safety prior to the commencement of the construction activities. The Office of Construction Safety reserves the right to withdraw the initial “Conditional Acceptance” if the Contractor fails to provide the remaining sections of a Site Safety Plan. Failure by the Contractor to submit an acceptable Site Safety Plan will be grounds for default.

Site Safety Plan requirements: The Site Safety Plan will be a written document and will apply to all project specific Contractor and subcontractor operations, and will have at a minimum, the following elements with each described in a separate section (It may be necessary to modify the basic format for certain unique or high-risk projects, such as tunnels or high-rise construction). All Site Safety Plan sections will be numbered in the order listed below. For sections, which are not applicable for the type of the work being performed by the Contractor on DDC project, the Contractor will in writing indicate “Not applicable based on the project work scope.” The Site Safety Plan will include Contractor’s name, DDC project ID, project location (s), and development and revision dates. The Site Safety Plan will include the sections, attachments, and appendixes provided in the Site Safety Plan. All pages of the Site Safety Plan will be numbered. If requested by the Office of Construction Safety, the Site Safety Plan must be developed and submitted for approval using a web-based system, the Site Safety Plan Application (SSP App).

1. Project Work Scope – Detailed information regarding work tasks that will be performed by Contractor and subcontractors under the project.
2. Responsibility and Organization – Contractor’s organization chart with responsible personnel for the project, including titles, names, contact information, roles, and responsibilities. All Contractor’s personnel required by the DDC Safety Requirements will be identified.
3. Safety Training and Education – OSHA 10 Hours training, requirements for daily safety briefings and weekly safety meetings, any work task specific training, responsible staff for implementation of training program for the project.
4. Job Hazard Analysis (JHA) – Project specific Job Hazard Analysis including work tasks, identified hazards, hazard control methods (administrative, engineering, PPE) to protect workers, property and general public, Contractor’s name, project id, location, name and signature of a certifying person, hazard assessment date.
5. Protection of Public – Project specific procedures covering safety of the general public during all project construction activities.
6. Hazard Corrective Actions - Procedures for hazard identification, including responsible person(s), frequency of safety inspections, implementation of corrective actions, safety inspection checklist.
7. Accident/Exposure Investigation – Project specific procedures for accident/incident/near miss investigation and implementation of corrective actions. Accident/incident/near miss notification procedure of DDC project staff (timer frame and responsible personnel).
8. Recording and Reporting Injuries – Procedures to meet 29 CFR 1904 requirements.
9. First Aid and Medical Attention – Responsible staff, location and inspection of First Aid kit, directions to local hospitals; emergency telephone numbers.
10. Project Specific Fire Protection and Prevention Program – Project specific procedures, including responsible staff, fire alarm system/methods, hot work procedures, etc.
11. Housekeeping Procedure.
12. Project Specific Illumination Procedure.
13. Project Specific Sanitation Procedure.
14. Personal Protective Equipment (PPE), including Respiratory Protection Program and Hearing Conservation Program, if required.
15. Hazard Communication Program – Contractor’s Hazard Communication Program, responsible staff; training; SDS records, project specific list of chemicals; location of the program and SDS records.
16. Means of Egress – Information regarding free and unobstructed egress from all parts of the building or structure; exit marking; maintenance of means of egress, etc.
17. Employee Emergency Action Plan – Project specific: responsible staff, emergency alarm system/devices, evacuation procedure, procedure to account for employees after evacuation, etc.
18. Evacuation Plan – Project specific evacuation plan (drawing/scheme) with exists and evacuation routes.
19. Ionizing/Nonionizing Radiation – Competent person, license and qualification requirements, type of radiation, employee’s exposure and protection, safety procedures, etc.

20. Material Handling, Storage, Use and Disposal – Project specific information regarding material storage, disposal, and handling: procedures, plan/drawings, etc.
21. Signs, Signals, and Barricades – Use of danger/warning signs, safety instruction signs, sidewalk closure and pedestrian fencing and barricades (if not included in the MPT plan), etc.
22. Tools – Hand and Power – Safety procedures for the type of tools to be used.
23. Scaffold – Project specific scaffold types, procedures, training requirements, scaffold drawings, designed, sealed, and signed by NYS Licensed Professional Engineer, or as otherwise directed; competent person, criteria for project specific scaffold, falling object protection, procedures for aerial lifts/scissor lifts.
24. Welding and Cutting – Project specific procedure for welding and cutting, including all necessary safety requirements such as fire prevention, personal protective equipment, hot work permits (if not covered by Contractor’s Fire Prevention and Protection program, FDNY certificate requirements).
25. Electrical Safety – Project specific procedures, including lock out-tag out.
26. Fall Protection – Project specific information regarding selected fall protection systems, fall protection plan, responsible staff.
27. Cranes, Derrick, Hoists, Elevators, Conveyors – project specific equipment information including type, rated load capacity, manufacture specification requirements, competent person, exposure to falling load, inspection, recordkeeping, clearance requirements, communication procedure, ground lines, permits.
28. Excavation Safety – Competent person; excavation procedures; project specific protective system, including drawings, designed, sealed, and signed by NYS Licensed Professional Engineer, or as otherwise directed.
29. Protection of Underground Facilities and Utilities Procedure, including responsible staff and responsibilities.
30. Concrete and Masonry Construction Procedures
31. Maintenance and Protection of Traffic Plan – Project specific MPT plan, designed, sealed, and signed by NYS Licensed Professional Engineer, or as otherwise directed; flagmen training, public safety, etc.
32. Steel Erection – Site specific erection plan, requirements for applicable written notifications, competent person, fall protection plan, training requirements, etc.
33. Demolition – Engineering survey, including written evidence, disconnection of all effected utilities, identification of all hazardous chemicals, materials, gases, etc., floor openings, chutes, inspection and maintenance of all stairs/passageways, removal of materials/debris/structural elements, lock out/tag out, competent person.
34. Blasting and the Use of Explosives – Project specific safety procedures, warning signs, training/qualification, transportation, storage and use of explosives, inspection.
35. Stairways and Ladders – Types of stairs and ladders, safety procedures, training requirements.
36. Alcohol and Drug Abuse Policy
37. Rodents and Vermin Controls
38. Toxic and Hazardous Substances – Safety procedures for substances that Contractor’s and subcontractor’s employees can be exposed on project.
39. Noise Mitigation Plan – Completed project specific Noise Mitigation Plan, and noise mitigation procedures.
40. Confined Space Program – Project specific Confined Space Program, responsible staff, training records, equipment information, rescue procedure, list of project specific confined spaces, forms.
41. Construction Vehicles/Heavy Equipment – Type of construction vehicles/heavy equipment to be used on site, procedures
42. Dust Mitigation Plan – Completed project specific Dust Mitigation Plan, and dust mitigation procedures.
43. Working Over and Near Water. Diving Operations – safety procedures including personal protective equipment, fall protection, rescue services, etc.

The most critical component of the Site Safety Plan is the Job Hazard Analysis (JHA) section. The JHA form is a written document prepared by the Contractor. The Contractor will conduct a site and task assessment to identify the tasks and any potential safety or environmental hazards related to performance of the work, eliminate or implement controls for the potential hazards, and identify proper personal protective equipment for the task. The JHA will be communicated to all Contractor/subcontractor personnel on site. The JHA will include safety hazard identification and controls to protect employees, general public, and property.

The initial JHA will be included in the Contractor’s Site Safety Plan and the current JHA form will be available at the construction site for reference. A JHA is a living document that will be re-evaluated and revised to address new hazards and tasks that may develop and will be present at the worksite and produced upon request.

VII. KICK-OFF MEETINGS/PRE-CONSTRUCTION AND SAFETY REVIEW

Prior to the start of construction activities on all DDC projects, RE will invite the Office of Construction Safety to the construction kick-off meeting. The Office of Construction Safety representative(s) will participate in this meeting with the Contractor and RE for the purpose of:

- A. Reviewing DDC Contract Safety Requirements
- B. Reviewing site-specific safety issues based on a project work scope, location, and any other factors which may impact safety of workers and general public.
- C. Reviewing the Site Safety Plan and JHA requirements.
- D. Reviewing Accident/Incident reporting and investigation procedures.
- E. Reviewing designated safety contacts, roles, and responsibilities.
- F. Discussing planned inspections and audits of the site by the Office of Construction Safety personnel.

VIII. EVALUATION DURING WORK IN PROGRESS

The Contractor's adherence to these Safety Requirements will be monitored throughout the project. This will be accomplished by the following:

- A. Use of a safety checklist by a representative of the Office of Construction Safety (or other designated DDC representative) and the RE during regular inspections and comprehensive audits of the job site. Field Exit Conferences will be held with the RE and Contractor Project Safety Representatives.
- B. The RE will continually monitor the safety and environmental performance of the Contractor's employees and work methods. Deficiencies will be brought to the attention of the Contractor's Project Safety Representative on site for immediate correction. The RE will maintain a written record of these deficiencies and have these records available upon request. Any critical deficiencies will be immediately reported to the Office of Construction Safety via telephone (718)391-1911.
- C. If the Contractor's safety performance during the project is not up to DDC standards (safety performance measure, accident/incident rate, etc.) the Director – Office of Construction Safety, or his/her designee will meet with the Contractor's Project Safety Representative and other representatives, the RE, and the DDC Environmental Specialist (if environmental issues are involved). The purpose of this meeting is to 1) determine the level of non-compliance; 2) explain and clarify the safety/environmental provisions; 3) agree on a future course of action to correct the deficiencies.
- D. If the deficiencies continue, the Commissioner may, without limitation, declare the Contractor in default.
- E. The Contractor will within 1 hour inform the RE of all accidents/incidents/near misses including all fatalities, any injuries to employees or members of the general public, and property damage (e.g., structural damage, equipment rollovers, utility damage, loads dropped from crane). The RE will notify the Office of Construction Safety as per DDC's Construction Safety Emergency and Accident Notification and Response Procedure and will maintain a record of all Contractor accidents/incidents for the project.
- F. The Contractor and the RE will notify the Office of Construction Safety within two (2) hours of the start of any NYS-DOL/ NYC-COSH/ OSHA/ EPA inspections.

IX. SAFETY PERFORMANCE EVALUATION

The Contractor's safety record, including accident/incident history and DDC safety inspection results, will be considered as part of the Contractor's performance evaluation at the conclusion of the project. Poor safety performance during the course of the project will be a reason to rate a Contractor unsatisfactory which may be reflected in the City's PASSPort system and will be considered for future procurement actions as set forth in the City's Procurement Policy Board Rules.

NOTICE TO BIDDERS

Please be advised that the following Riders to the March 2017 New York City Standard Construction Contract have been attached and incorporated in this Invitation for Bid:

- Rider regarding Non-Compensable Delays and Grounds for Extension;
- Rider regarding NYC Earned Safe and Sick Time Act.

Other than provisions specifically delineated in the Riders, all other terms of the March 2017 New York City Standard Construction Contract continue to apply in full force and effect.

**RIDER TO NEW YORK CITY STANDARD CONSTRUCTION CONTRACT (MARCH
2017) REGARDING NON-COMPENSABLE DELAYS AND GROUNDS FOR
EXTENSION**

The following provisions supersede the corresponding provisions in the March 2017 version of the New York City Standard Construction Contract:

1. Section **11.5.1** provides as follows:

11.5.1 The acts or omissions of public or government bodies (other than **City** agencies) or of any third parties who are disclosed in the **Contract Documents**, or those third parties who are ordinarily encountered or who are generally recognized as related to the **Work**, including but not limited to, **Other Contractors**, utilities or private enterprises;

2. Section **11.5.6** provides as follows:

11.5.6 Climatic conditions, storms, floods, droughts, tidal waves, fires, hurricanes, earthquakes, landslides or other catastrophes or acts of God; acts of war or of the public enemy or terrorist acts; disruption, outage or power failure caused by a utility's inability or failure to provide service, pandemics, epidemics, outbreaks of infectious disease or any other public health emergency; other states of emergency declared by the City, State or Federal government, quarantine restrictions, and freight embargoes; including the **City's** reasonable responses to any of the above; and

3. Section **13.3** provides as follows:

13.3 Grounds for Extension: If such application is made, the **Contractor** shall be entitled to an extension of time for delay in completion of the **Work** caused solely:

13.3.1 By any of the acts or omissions of the **City**, its officials, agents or employees set forth in Articles **11.4.1.1** through **11.4.1.9**; or

13.3.2 By or attributable to any of the items set forth in Articles **11.5.1** through **11.5.7**.

13.3.3 The **Contractor** shall, however, be entitled to an extension of time for such causes only for the number of **Days** of delay which the **ACCO** or the Board may determine to be due solely to such causes, and then only if the **Contractor** shall have strictly complied with all of the requirements of Articles 9 and 10.

NYC EARNED SAFE AND SICK TIME ACT CONTRACT RIDER

(To supersede Section 4.06 of the January 2018 Appendix A and Section 35.5 of the March 2017 Standard Construction Contract and to be attached to other City contracts and solicitations)

A. *Introduction and General Provisions.*

1. The Earned Safe and Sick Time Act (“ESSTA”), codified at Title 20, Chapter 8 of the New York City Administrative Code, also known as the “Paid Safe and Sick Leave Law,” requires covered employees (as defined in Admin. Code § 20-912) in New York City (“City”) to be provided with paid safe and sick time. Contractors of the City or of other governmental entities may be required to provide safe and sick time pursuant to the ESSTA. The ESSTA is enforced by the City’s Department of Consumer and Worker Protection (“DCWP”), which has promulgated 6 RCNY §§ 7-101 and 201 *et seq.* (“DCWP Rules”).

2. The Contractor agrees to comply in all respects with the ESSTA and the DCWP Rules, and as amended, if applicable, in the performance of this agreement. The Contractor further acknowledges that such compliance is a material term of this agreement and that failure to comply with the ESSTA in performance of this agreement may result in its termination.

3. The Contractor must notify (with a copy to DCWP at ComplianceMonitoring@dcwp.nyc.gov) the Agency Chief Contracting Officer of the City Agency or other entity with whom it is contracting in writing within 10 days of receipt of a complaint (whether oral or written) or notice of investigation regarding the ESSTA involving the performance of this agreement. Additionally, the Contractor must cooperate with DCWP’s guidance and must comply with DCWP’s subpoenas, requests for information, and other document demands as set forth in the ESSTA and the DCWP Rules. More information is available at <https://www1.nyc.gov/site/dca/about/paid-sick-leave-what-employers-need-to-know.page>.

4. Upon conclusion of a DCWP investigation, Contractor will receive a findings letter detailing any employee relief and civil penalties owed. Pursuant to the findings, Contractor will have the opportunity to settle any violations and cure the breach of this agreement caused by failure to comply with the ESSTA either i) without a trial by entering into a consent order or ii) appearing before an impartial judge at the City’s administrative tribunal. In addition to and notwithstanding any other rights and remedies available to the City, non-payment of relief and penalties owed pursuant to a consent order or final adjudication within 30 days of such consent order or final adjudication may result in the termination of this agreement without further opportunity to settle or cure the violations.

5. The ESSTA is briefly summarized below for the convenience of the Contractor. The Contractor is advised to review the ESSTA and the DCWP Rules in their entirety. The Contractor may go to www.nyc.gov/PaidSickLeave for resources for employers, such as Frequently Asked Questions, timekeeping tools and model forms, and an event calendar of upcoming presentations and webinars at which the Contractor can get more information about how to comply with the ESSTA and the DCWP Rules. The Contractor acknowledges that it is responsible for compliance with the ESSTA and the DCWP Rules notwithstanding any inconsistent language contained herein.

B. *Pursuant to the ESSTA and DCWP Rules: Applicability, Accrual, and Use.*

1. An employee who works within the City must be provided paid safe and sick time.¹ Employers with one hundred or more employees are required to provide 56 hours of safe and sick time for an employee each calendar year. Employers with fewer than one hundred employees are required to provide 40 hours of sick leave each calendar year. Employers must provide a minimum of one hour of safe and sick time for every 30 hours worked by an employee and compensation for such safe and sick time must be provided at the greater of the employee's regular hourly rate or the minimum wage at the time the paid safe or sick time is taken. Employers are not discouraged or prohibited from providing more generous safe and sick time policies than what the ESSTA requires.

2. Employees have the right to determine how much safe and sick time they will use, provided that an employer may set a reasonable minimum increment for the use of safe and sick time not to exceed four hours per day. For the use of safe time or sick time beyond the set minimum increment, an employer may set fixed periods of up to thirty minutes beyond the minimum increment. In addition, an employee may carry over up to 40 or 56 hours of unused safe and sick time to the following calendar year, provided that no employer is required to carry over unused paid safe and sick time if the employee is paid for such unused safe and sick time and the employer provides the employee with at least the legally required amount of paid safe and sick time for such employee for the immediately subsequent calendar year on the first day of such calendar year.

3. An employee entitled to safe and sick time pursuant to the ESSTA may use safe and sick time for any of the following:

a. such employee's mental illness, physical illness, injury, or health condition or the care of such illness, injury, or condition or such employee's need for medical diagnosis or preventive medical care;

b. such employee's care of a family member (an employee's child, spouse, domestic partner, parent, sibling, grandchild, or grandparent, the child or parent of an employee's spouse or domestic partner, any other individual related by blood to the employee, and any other individual whose close association with the employee is the equivalent of a family relationship) who has a mental illness, physical illness, injury or health condition or who has a need for medical diagnosis or preventive medical care;

¹ Pursuant to the ESSTA, if fewer than five employees work for the same employer, and the employer had a net income of less than one million dollars during the previous tax year, such employer has the option of providing such employees uncompensated safe and sick time.

c. closure of such employee's place of business by order of a public official due to a public health emergency;

d. such employee's need to care for a child whose school or childcare provider has been closed due to a public health emergency; or

e. when the employee or a family member has been the victim of a family offense matter, sexual offense, stalking, or human trafficking:

1. to obtain services from a domestic violence shelter, rape crisis center, or other shelter or services program for relief from a family offense matter, sexual offense, stalking, or human trafficking;
2. to participate in safety planning, temporarily or permanently relocate, or take other actions to increase the safety of the employee or employee's family members from future family offense matters, sexual offenses, stalking, or human trafficking;
3. to meet with a civil attorney or other social service provider to obtain information and advice on, and prepare for or participate in any criminal or civil proceeding, including but not limited to, matters related to a family offense matter, sexual offense, stalking, human trafficking, custody, visitation, matrimonial issues, orders of protection, immigration, housing, discrimination in employment, housing or consumer credit;
4. to file a complaint or domestic incident report with law enforcement;
5. to meet with a district attorney's office;
6. to enroll children in a new school; or
7. to take other actions necessary to maintain, improve, or restore the physical, psychological, or economic, health or safety of the employee or the employee's family member or to protect those who associate or work with the employee.

4. An employer must not require an employee, as a condition of taking safe and sick time, to search for a replacement. However, where the employee's need for safe and sick time is foreseeable, an employer may require an employee to provide reasonable notice of the need to use safe and sick time. For an absence of more than three consecutive work days, an employer may require reasonable documentation that the use of safe and sick time was needed for a reason listed in Admin. Code § 20-914; and/or written confirmation that an employee used safe and sick time pursuant to the ESSTA. However, an employer may not require documentation specifying the nature of a medical condition, require disclosure of the details of a medical condition, or require disclosure of the details of a family offense matter, sexual offense, stalking, or human trafficking, as a condition of providing safe and sick time. Health information and information concerning family offenses, sexual offenses, stalking or human trafficking obtained solely due to an

employee's use of safe and sick time pursuant to the ESSTA must be treated by the employer as confidential. An employer must reimburse an employee for all reasonable costs or expenses incurred in obtaining such documentation for the employer.

5. An employer must provide to all employees a written policy explaining its method of calculating sick time, policies regarding the use of safe and sick time (including any permissible discretionary conditions on use), and policies regarding carry-over of unused time at the end of the year, among other topics. It must provide the policy to employees using a delivery method that reasonably ensures that employees receive the policy. If such employer has not provided its written policy, it may not deny safe and sick time to an employee because of non-compliance with such a policy.

6. An employer must provide a pay statement or other form of written documentation that informs the employee of the amount of safe/sick time accrued and used during the relevant pay period and the total balance of the employee's accrued safe/sick time available for use.

7. Safe and sick time to which an employee is entitled must be paid no later than the payday for the next regular payroll period beginning after the safe and sick time was used.

C. *Exemptions and Exceptions.* Notwithstanding the above, the ESSTA does not apply to any of the following:

1. an independent contractor who does not meet the definition of employee under N.Y. Labor Law § 190(2);

2. an employee covered by a valid collective bargaining agreement, if the provisions of the ESSTA are expressly waived in such agreement and such agreement provides a benefit comparable to that provided by the ESSTA for such employee;

3. an audiologist, occupational therapist, physical therapist, or speech language pathologist who is licensed by the New York State Department of Education and who calls in for work assignments at will, determines their own schedule, has the ability to reject or accept any assignment referred to them, and is paid an average hourly wage that is at least four times the federal minimum wage;

4. an employee in a work study program under Section 2753 of Chapter 42 of the United States Code;

5. an employee whose work is compensated by a qualified scholarship program as that term is defined in the Internal Revenue Code, Section 117 of Chapter 20 of the United States Code; or

6. a participant in a Work Experience Program (WEP) under N.Y. Social Services Law § 336-c.

D. *Retaliation Prohibited.* An employer shall not take any adverse action against an employee that penalizes the employee for, or is reasonably likely to deter the employee from or interfere with the employee exercising or attempting in good faith to exercise any right provided by the ESSTA. In addition, an employer shall not interfere with any investigation, proceeding, or hearing pursuant to the ESSTA.

E. *Notice of Rights.*

1. An employer must provide its employees with written notice of their rights pursuant to the ESSTA. Such notice must be in English and the primary language spoken by an employee, provided that DCWP has made available a translation into such language. Downloadable notices are available on DCWP's website at <https://www1.nyc.gov/site/dca/about/Paid-Safe-Sick-Leave-Notice-of-Employee-Rights.page>. The notice must be provided to the employees by a method that reasonably ensures personal receipt by the employee.

2. Any person or entity that willfully violates these notice requirements is subject to a civil penalty in an amount not to exceed \$50.00 for each employee who was not given appropriate notice.

F. *Records.* An employer must retain records documenting its compliance with the ESSTA for a period of at least three years, and must allow DCWP to access such records in furtherance of an investigation related to an alleged violation of the ESSTA.

G. *Enforcement and Penalties.*

1. Upon receiving a complaint alleging a violation of the ESSTA, DCWP must investigate such complaint. DCWP may also open an investigation to determine compliance with the ESSTA on its own initiative. Upon notification of a complaint or an investigation by DCWP, the employer must provide DCWP with a written response and any such other information as DCWP may request. If DCWP believes that a violation of the ESSTA has occurred, it has the right to issue a notice of violation to the employer.

2. DCWP has the power to grant an employee or former employee all appropriate relief as set forth in Admin. Code § 20-924(d). Such relief may include, but is not limited to, treble damages for the wages that should have been paid; statutory damages for unlawful retaliation; and damages, including statutory damages, full compensation for wages and benefits lost, and reinstatement, for unlawful discharge. In addition, DCWP may impose on an employer found to have violated the ESSTA civil penalties not to exceed \$500.00 for a first violation, \$750.00 for a second violation within two years of the first violation, and \$1,000.00 for each succeeding violation within two years of the previous violation. When an employer has a policy or practice of not providing or refusing to allow the use of safe and sick time to its employees, DCWP may seek penalties and relief on a per employee basis.

3. Pursuant to Admin. Code § 20-924.2, (a) where reasonable cause exists to believe that an employer is engaged in a pattern or practice of violations of the ESSTA, the Corporation Counsel may commence a civil action on behalf of the City in a court of competent jurisdiction by filing a complaint setting forth facts relating to such pattern or practice and requesting relief, which may include injunctive relief, civil penalties and any other appropriate relief. Nothing in § 20-924.2 prohibits DCWP from exercising its authority under section 20-924 or the Charter, provided that a civil action pursuant to § 20-924.2 shall not have previously been commenced.

H. *More Generous Policies and Other Legal Requirements.* Nothing in the ESSTA is intended to discourage, prohibit, diminish, or impair the adoption or retention of a more generous safe and sick time policy, or the obligation of an employer to comply with any contract, collective bargaining agreement, employment benefit plan or other agreement providing more generous safe and sick time. The ESSTA provides minimum requirements pertaining to safe and sick time and does not preempt, limit, or otherwise affect the applicability of any other law, regulation, rule, requirement, policy or standard that provides for greater accrual or use by employees of safe and sick leave or time, whether paid or unpaid, or that extends other protections to employees. The ESSTA may not be construed as creating or imposing any requirement in conflict with any federal or state law, rule or regulation.

CITY OF NEW YORK

STANDARD CONSTRUCTION CONTRACT

March 2017

(NO TEXT ON THIS PAGE)

CITY OF NEW YORK STANDARD CONSTRUCTION CONTRACT

TABLE OF CONTENTS

(NO TEXT ON THIS PAGE) 6

CHAPTER I: THE CONTRACT AND DEFINITIONS 7

ARTICLE 1. THE CONTRACT.....7

ARTICLE 2. DEFINITIONS.....7

CHAPTER II: THE WORK AND ITS PERFORMANCE 10

ARTICLE 3. CHARACTER OF THE WORK10

ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION.....10

ARTICLE 5. COMPLIANCE WITH LAWS11

ARTICLE 6. INSPECTION16

ARTICLE 7. PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION.....17

CHAPTER III: TIME PROVISIONS 18

ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK.....18

ARTICLE 9. PROGRESS SCHEDULES18

ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL.....19

ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY19

ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS23

ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE24

ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK.....27

ARTICLE 15. LIQUIDATED DAMAGES28

ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION.....29

CHAPTER IV: SUBCONTRACTS AND ASSIGNMENTS 29

ARTICLE 17. SUBCONTRACTS29

ARTICLE 18. ASSIGNMENTS31

CHAPTER V: CONTRACTOR'S SECURITY AND GUARANTEE 32

ARTICLE 19. SECURITY DEPOSIT.....32

ARTICLE 20. PAYMENT GUARANTEE.....32

ARTICLE 21. RETAINED PERCENTAGE35

ARTICLE 22. INSURANCE.....35

ARTICLE 23. MONEY RETAINED AGAINST CLAIMS.....41

ARTICLE 24. MAINTENANCE AND GUARANTY42

CHAPTER VI: CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM 43

ARTICLE 25. CHANGES43

ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK.....43

ARTICLE 27. RESOLUTION OF DISPUTES46

ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS50

ARTICLE 29. OMITTED WORK.....51

ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS51

CHAPTER VII: POWERS OF THE RESIDENT ENGINEER, THE ENGINEER OR ARCHITECT

AND THE COMMISSIONER	52
ARTICLE 31. THE RESIDENT ENGINEER	52
ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER.....	53
ARTICLE 33. THE COMMISSIONER.....	53
ARTICLE 34. NO ESTOPPEL	54
CHAPTER VIII: LABOR PROVISIONS	54
ARTICLE 35. EMPLOYEES.....	54
ARTICLE 36. NO DISCRIMINATION.....	61
ARTICLE 37. LABOR LAW REQUIREMENTS.....	63
ARTICLE 38. PAYROLL REPORTS.....	68
ARTICLE 39. DUST HAZARDS	69
CHAPTER IX: PARTIAL AND FINAL PAYMENTS	69
ARTICLE 40. CONTRACT PRICE.....	69
ARTICLE 41. BID BREAKDOWN ON LUMP SUM	69
ARTICLE 42. PARTIAL PAYMENTS.....	70
ARTICLE 43. PROMPT PAYMENT.....	70
ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT	71
ARTICLE 45. FINAL PAYMENT.....	72
ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT	73
ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION.....	73
CHAPTER X: CONTRACTOR'S DEFAULT.....	74
ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT	74
ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT	75
ARTICLE 50. QUITTING THE SITE	75
ARTICLE 51. COMPLETION OF THE WORK	75
ARTICLE 52. PARTIAL DEFAULT	76
ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK.....	76
ARTICLE 54. OTHER REMEDIES	76
CHAPTER XI: MISCELLANEOUS PROVISIONS	77
ARTICLE 55. CONTRACTOR'S WARRANTIES	77
ARTICLE 56. CLAIMS AND ACTIONS THEREON	77
ARTICLE 57. INFRINGEMENT	78
ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES	78
ARTICLE 59. SERVICE OF NOTICES.....	78
ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT.....	78
ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED.....	79
ARTICLE 62. TAX EXEMPTION.....	79
ARTICLE 63. INVESTIGATION(S) CLAUSE.....	80
ARTICLE 64. TERMINATION BY THE CITY.....	82
ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE	85
ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT.....	85
ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM.....	86
ARTICLE 68. ANTITRUST	87
ARTICLE 69. MacBRIDE PRINCIPLES PROVISIONS.....	87
ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB.....	89
ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS.....	89
ARTICLE 72. CONFLICTS OF INTEREST	89

ARTICLE 73. MERGER CLAUSE89

ARTICLE 74. STATEMENT OF WORK89

ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR.....90

ARTICLE 76. ELECTRONIC FUNDS TRANSFER.....90

ARTICLE 77. RECORDS RETENTION.....90

**ARTICLE 78. EXAMINATION AND VIEWING OF SITE, CONSIDERATION OF OTHER
SOURCES OF INFORMATION AND CHANGED SITE CONDITIONS90**

**ARTICLE 79. PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS
ENTERPRISES IN CITY PROCUREMENT91**

PERFORMANCE BOND #199

PERFORMANCE BOND #2.....103

PAYMENT BOND107

(NO TEXT ON THIS PAGE)

WITNESSETH:

The parties, in consideration of the mutual agreements contained herein, agree as follows:

CHAPTER I: THE CONTRACT AND DEFINITIONS

ARTICLE 1. THE CONTRACT

1.1 Except for titles, subtitles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience), the following, except for such portions thereof as maybe specifically excluded, shall be deemed to be part of this **Contract**:

1.1.1 All provisions required by law to be inserted in this **Contract**, whether actually inserted or not;

1.1.2 The Contract Drawings and Specifications;

1.1.3 The General Conditions and Special Conditions, if any;

1.1.4 The **Contract**;

1.1.5 The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet;

1.1.6 All Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed or the Order to Work.

1.2 Should any conflict occur in or between the Drawings and Specifications, the **Contractor** shall be deemed to have estimated the most expensive way of doing the **Work**, unless the **Contractor** shall have asked for and obtained a decision in writing from the **Commissioner** of the **Agency** that is entering into this **Contract**, before the submission of its bid, as to what shall govern.

ARTICLE 2. DEFINITIONS

2.1 The following words and expressions, or pronouns used in their stead, shall, wherever they appear in this Contract, be construed as follows, unless a different meaning is clear from the context:

2.1.1 “**Addendum**” or “**Addenda**” shall mean the additional Contract provisions and/or technical clarifications issued in writing by the Commissioner prior to the receipt of bids.

2.1.2 “**Agency**” shall mean a city, county, borough or other office, position, department, division, bureau, board or commission, or a corporation, institution or agency of government, the expenses of which are paid in whole or in part from the City treasury.

2.1.3 “**Agency Chief Contracting Officer**” (**ACCO**) shall mean a person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO, or his/her duly authorized representative.

2.1.4 **“Allowance”** shall mean a sum of money which the Agency may include in the total amount of the Contract for such specific contingencies as the Agency believes may be necessary to complete the Work, *e.g.*, lead or asbestos remediation, and for which the Contractor will be paid on the basis of stipulated unit prices or a formula set forth in the Contract or negotiated between the parties provided, however, that if the Contractor is not directed to use the Allowance, the Contractor shall have no right to such money and it shall be deducted from the total amount of the Contract.

2.1.5 **“City”** shall mean the City of New York.

2.1.6 **“City Chief Procurement Officer” (CCPO)** shall mean a person delegated authority by the Mayor to coordinate and oversee the procurement activity of Mayoral agency staff, including the ACCO and any offices which have oversight responsibility for the procurement of construction, or his/her duly authorized representative.

2.1.7 **“Commissioner”** shall mean the head of the Agency that has entered into this Contract, or his/her duly authorized representative.

2.1.8 **“Comptroller”** shall mean the Comptroller of the City of New York.

2.1.9 **“Contract”** or **“Contract Documents”** shall mean each of the various parts of the contract referred to in Article 1 hereof, both as a whole and severally.

2.1.10 **“Contract Drawings”** shall mean only those drawings specifically entitled as such and listed in the Specifications or in any Addendum, or any drawings furnished by the Commissioner, pertaining or supplemental thereto.

2.1.11 **“Contract Work”** shall mean everything required to be furnished and done by the Contractor by any one or more of the parts of the Contract referred to in Article 1, except Extra Work as hereinafter defined.

2.1.12 **“Contractor”** shall mean the entity which executed this Contract, whether a corporation, firm, partnership, joint venture, individual, or any combination thereof, and its, their, his/her successors, personal representatives, executors, administrators, and assigns, and any person, firm, partnership, joint venture, individual, or corporation which shall at any time be substituted in the place of the Contractor under this Contract.

2.1.13 **“Days”** shall mean calendar days, except where otherwise specified.

2.1.14 **“Engineer”** or **“Architect”** or **“Project Manager”** shall mean the person so designated in writing by the Commissioner in the Notice to Proceed or the Order to Work to act as such in relation to this Contract, including a private Architect or Engineer or Project Manager, as the case may be. Subject to written approval by the Commissioner, the Engineer, Architect or Project Manager may designate an authorized representative.

2.1.15 **“Engineering Audit Officer” (EAO)** shall mean the person so designated by the Commissioner to perform responsible auditing functions hereunder.

2.1.16 **“Extra Work”** shall mean Work other than that required by the Contract at the time of award which is authorized by the Commissioner pursuant to Chapter VI of this Contract.

- 2.1.17 **“Federal-Aid Contract”** shall mean a contract in which the United States (federal) Government provides financial funding as so designated in the Information for Bidders.
- 2.1.18 **“Final Acceptance”** shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.
- 2.1.19 **“Final Approved Punch List”** shall mean a list, approved pursuant to Article 14.2.2, specifying those items of Work to be completed by the Contractor after Substantial Completion and dates for the completion of each item of Work.
- 2.1.20 **“Law”** or **“Laws”** shall mean the Constitution of the State of New York, the New York City Charter, the New York City Administrative Code, a statute of the United States or of the State of New York, a local law of the City of New York, any ordinance, rule or regulation having the force of law, or common law.
- 2.1.21 **“Materialman”** shall mean any corporation, firm, partnership, joint venture, or individual, other than employees of the Contractor, who or which contracts with the Contractor or any Subcontractor, to fabricate or deliver, or who actually fabricates or delivers, plant, materials or equipment to be incorporated in the Work.
- 2.1.22 **“Means and Methods of Construction”** shall mean the labor, materials, temporary structures, tools, plant, and construction equipment, and the manner and time of their use, necessary to accomplish the result intended by this Contract.
- 2.1.23 **“Notice to Proceed”** or **“Order to Work”** shall mean the written notice issued by the Commissioner specifying the time for commencement of the Work and the Engineer, Architect or Project Manager.
- 2.1.24 **“Other Contractor(s)”** shall mean any contractor (other than the entity which executed this Contract or its Subcontractors) who or which has a contract with the City for work on or adjacent to the building or Site of the Work.
- 2.1.25 **“Payroll Taxes”** shall mean State Unemployment Insurance (SUI), Federal Unemployment Insurance (FUI), and payments pursuant to the Federal Insurance Contributions Act (FICA).
- 2.1.26 **“Project”** shall mean the public improvement to which this Contract relates.
- 2.1.27 **“Procurement Policy Board” (PPB)** shall mean the Agency of the City of New York whose function is to establish comprehensive and consistent procurement policies and rules which shall have broad application throughout the City.
- 2.1.28 **“Required Quantity”** in a unit price Contract shall mean the actual quantity of any item of Work or materials which is required to be performed or furnished in order to comply with the Contract.
- 2.1.29 **“Resident Engineer”** shall mean the representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the Work.
- 2.1.30 **“Site”** shall mean the area upon or in which the Contractor’s operations are carried on, and such other areas adjacent thereto as may be designated as such by the Engineer.
- 2.1.31 **“Small Tools”** shall mean items that are ordinarily required for a worker’s job

function, including but not limited to, equipment that ordinarily has no licensing, insurance or substantive storage costs associated with it; such as circular and chain saws, impact drills, threaders, benders, wrenches, socket tools, etc.

2.1.32 “**Specifications**” shall mean all of the directions, requirements, and standards of performance applying to the Work as hereinafter detailed and designated under the Specifications.

2.1.33 “**Subcontractor**” shall mean any person, firm or corporation, other than employees of the Contractor, who or which contracts with the Contractor or with its subcontractors to furnish, or actually furnishes labor, or labor and materials, or labor and equipment, or superintendence, supervision and/or management at the Site. Wherever the word Subcontractor appears, it shall also mean sub-Subcontractor.

2.1.34 “**Substantial Completion**” shall mean the written determination by the Engineer that the Work required under this Contract is substantially, but not entirely, complete and the approval of the **Final Approved Punch List**.

2.1.35 “**Work**” shall mean all services required to complete the Project in accordance with the Contract Documents, including without limitation, labor, material, superintendence, management, administration, equipment, and incidentals, and obtaining any and all permits, certifications and licenses as may be necessary and required to complete the Work, and shall include both Contract Work and Extra Work.

CHAPTER II: THE WORK AND ITS PERFORMANCE

ARTICLE 3. CHARACTER OF THE WORK

3.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Work** shall be performed in accordance with the best modern practice, utilizing, unless otherwise specified in writing, new and unused materials of standard first grade quality and workmanship and design of the highest quality, to the satisfaction of the **Commissioner**.

ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION

4.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Means and Methods of Construction** shall be such as the **Contractor** may choose; subject, however, to the **Engineer’s** right to reject the **Means and Methods of Construction** proposed by the **Contractor** which in the opinion of the **Engineer**:

4.1.1 Will constitute or create a hazard to the **Work**, or to persons or property; or

4.1.2 Will not produce finished **Work** in accordance with the terms of the **Contract**; or

4.1.3 Will be detrimental to the overall progress of the **Project**.

4.2 The **Engineer’s** approval of the **Contractor’s Means and Methods of Construction**, or his/her failure to exercise his/her right to reject such means or methods, shall not relieve the **Contractor** of its obligation to complete the **Work** as provided in this **Contract**; nor shall the exercise of such right to reject

create a cause of action for damages.

ARTICLE 5. COMPLIANCE WITH LAWS

5.1 The **Contractor** shall comply with all **Laws** applicable to this **Contract** and to the **Work** to be done hereunder.

5.2 Procurement Policy Board Rules: This **Contract** is subject to the Rules of the **PPB** (“**PPB Rules**”) in effect at the time of the bid opening for this **Contract**. In the event of a conflict between the **PPB Rules** and a provision of this **Contract**, the **PPB Rules** shall take precedence.

5.3 Noise Control Code provisions.

5.3.1 In accordance with the provisions of Section 24-216(b) of the Administrative Code of the **City** (“**Administrative Code**”), Noise Abatement Contract Compliance, devices and activities which will be operated, conducted, constructed or manufactured pursuant to this **Contract** and which are subject to the provisions of the **City** Noise Control Code shall be operated, conducted, constructed, or manufactured without causing a violation of the Administrative Code. Such devices and activities shall incorporate advances in the art of noise control development for the kind and level of noise emitted or produced by such devices and activities, in accordance with regulations issued by the **Commissioner** of the **City** Department of Environmental Protection.

5.3.2 The **Contractor** agrees to comply with Section 24-219 of the Administrative Code and implementing rules codified at 15 Rules of the City of New York (“**RCNY**”) Section 28-100 *et seq.* In accordance with such provisions, the **Contractor**, if the **Contractor** is the responsible party under such regulations, shall prepare and post a Construction Noise Mitigation Plan at each **Site**, in which the **Contractor** shall certify that all construction tools and equipment have been maintained so that they operate at normal manufacturers operating specifications. If the **Contractor** cannot make this certification, it must have in place an Alternative Noise Mitigation Plan approved by the **City** Department of Environmental Protection. In addition, the **Contractor**’s certified Construction Noise Mitigation Plan is subject inspection by the **City** Department of Environmental Protection in accordance with Section 28-101 of Title 15 of RCNY. No **Contract Work** may take place at a **Site** unless there is a Construction Noise Mitigation Plan or approved Alternative Noise Mitigation Plan in place. In addition, the **Contractor** shall create and implement a noise mitigation training program. Failure to comply with these requirements may result in fines and other penalties pursuant to the applicable provisions of the Administrative Code and RCNY.

5.4 Ultra Low Sulfur Diesel Fuel: In accordance with the provisions of Section 24-163.3 of the Administrative Code, the **Contractor** specifically agrees as follows:

5.4.1 Definitions. For purposes of this Article 5.4, the following definitions apply:

5.4.1(a) “**Contractor**” means any person or entity that enters into a Public Works Contract with a **City Agency**, or any person or entity that enters into an agreement with such person or entity, to perform work or provide labor or services related to such Public Works Contract.

5.4.1(b) “**Motor Vehicle**” means any self-propelled vehicle designed for transporting

persons or property on a street or highway.

5.4.1(c) “Nonroad Engine” means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.4.1(d) “Nonroad Vehicle” means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this term shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) horsepower or less and that are not used in any construction program or project.

5.4.1(e) “Public Works Contract” means a contract with a **City Agency** for a construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; a contract with a **City Agency** for the preparation for any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; or a contract with a **City Agency** for any final work involved in the completion of any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge.

5.4.1(f) “Ultra Low Sulfur Diesel Fuel” means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.4.2 Ultra Low Sulfur Diesel Fuel

5.4.2(a) All **Contractors** shall use Ultra Low Sulfur Diesel Fuel in diesel-powered Nonroad Vehicles in the performance of this **Contract**.

5.4.2(b) Notwithstanding the requirements of Article 5.4.2(a), **Contractors** may use diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) to fulfill the requirements of this Article 5.4.2, where the Commissioner of the **City Department of Environmental Protection** (“DEP Commissioner”) has issued a determination that a sufficient quantity of Ultra Low Sulfur Diesel Fuel is not available to meet the needs of **Agencies** and **Contractors**. Any such determination shall expire after six (6) months unless renewed.

5.4.2(c) **Contractors** shall not be required to comply with this Article 5.4.2 where the **City Agency** letting this **Contract** makes a written finding, which is approved, in writing, by the DEP Commissioner, that a sufficient quantity of Ultra Low Sulfur Diesel Fuel, or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is not available to meet the requirements of Section 24-163.3 of the Administrative Code, provided that such **Contractor** in its fulfillment of the requirements of this **Contract**, to the extent practicable, shall use whatever quantity of Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per

million (30 ppm) is available. Any finding made pursuant to this Article 5.4.2(c) shall expire after sixty (60) **Days**, at which time the requirements of this Article 5.4.2 shall be in full force and effect unless the **City Agency** renews the finding in writing and such renewal is approved by the DEP Commissioner.

5.4.2(d) **Contractors** may check on determinations and approvals issued by the DEP Commissioner pursuant to Section 24-163.3 of the Administrative Code, if any, at www.dep.nyc.gov or by contacting the **City Agency** letting this **Contract**.

5.4.2(e) The requirements of this Article 5.4.2 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.3 Best Available Technology

5.4.3(a) All **Contractors** shall utilize the best available technology for reducing the emission of pollutants for diesel-powered Nonroad Vehicles in the performance of this **Contract**. For determinations of best available technology for each type of diesel-powered Nonroad Vehicle, **Contractors** shall comply with the regulations of the **City** Department of Environmental Protection, as and when adopted, Chapter 14 of Title 15 of the Rules of the City of New York (RCNY). The **Contractor** shall fully document all steps in the best available technology selection process and shall furnish such documentation to the **City Agency** or the DEP Commissioner upon request. The **Contractor** shall retain all documentation generated in the best available technology selection process for as long as the selected best available technology is in use.

5.4.3(b) No **Contractor** shall be required to replace best available technology for reducing the emission of pollutants or other authorized technology utilized for a diesel-powered Nonroad Vehicle in accordance with the provisions of this Article 5.4.3 within three (3) years of having first utilized such technology for such vehicle.

5.4.3(c) This Article 5.4.3 shall not apply to any vehicle used to satisfy the requirements of a specific Public Works Contract for fewer than twenty (20) **Days**.

5.4.3(d) The **Contractor** shall not be required to comply with this Article 5.4.3 with respect to a diesel-powered Nonroad Vehicle under the following circumstances:

5.4.3(d)(i) Where the **City Agency** makes a written finding, which is approved, in writing, by the DEP Commissioner, that the best available technology for reducing the emission of pollutants as required by this Article 5.4.3 is unavailable for such vehicle, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle.

5.4.3(d)(ii) Where the DEP Commissioner has issued a written waiver based upon the Contractor having demonstrated to the DEP Commissioner that the use of the best available technology for reducing the emission of pollutants might endanger the operator of such vehicle or those working near such vehicle, due to engine malfunction, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle, which would not endanger the operator of such vehicle or those working near such vehicle.

5.4.3(d)(iii) In determining which technology to use for the purposes of Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above, the **Contractor** shall primarily consider the reduction in emissions of particulate matter and secondarily consider the reduction in emissions of nitrogen oxides associated with the use of such technology, which shall in no event result in an increase in the emissions of either such pollutant.

5.4.3(d)(iv) The **Contractor** shall submit requests for a finding or a waiver pursuant to this Article 5.4.3(d) in writing to the DEP Commissioner, with a copy to the **ACCO** of the **City Agency** letting this **Contract**. Any finding or waiver made or issued pursuant to Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above shall expire after one hundred eighty (180) **Days**, at which time the requirements of Article 5.4.3(a) shall be in full force and effect unless the **City Agency** renews the finding, in writing, and the DEP Commissioner approves such finding, in writing, or the DEP Commissioner renews the waiver, in writing.

5.4.3(e) The requirements of this Article 5.4.3 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.4 Section 24-163 of the Administrative Code. The **Contractor** shall comply with Section 24-163 of the Administrative Code related to the idling of the engines of motor vehicles while parking.

5.4.5 Compliance

5.4.5(a) The **Contractor's** compliance with Article 5.4 may be independently monitored. If it is determined that the **Contractor** has failed to comply with any provision of Article 5.4, any costs associated with any independent monitoring incurred by the **City** shall be reimbursed by the **Contractor**.

5.4.5(b) Any **Contractor** who violates any provision of Article 5.4, except as provided in Article 5.4.5(c) below, shall be liable for a civil penalty between the amounts of one thousand (\$1,000) and ten thousand (\$10,000) dollars, in addition to twice the amount of money saved by such **Contractor** for failure to comply with Article 5.4.

5.4.5(c) No **Contractor** shall make a false claim with respect to the provisions of Article 5.4 to a **City Agency**. Where a **Contractor** has been found to have done so, such **Contractor** shall be liable for a civil penalty of twenty thousand (\$20,000) dollars, in addition to twice the amount of money saved by such **Contractor** in association with having made such false claim.

5.4.6 Reporting

5.4.6(a) For all Public Works Contracts covered by this Article 5.4, the **Contractor** shall report to the **City Agency** the following information:

5.4.6(a)(i) The total number of diesel-powered Nonroad Vehicles used to fulfill the requirements of this Public Works Contract;

5.4.6(a)(ii) The number of such Nonroad Vehicles that were powered by Ultra Low Sulfur Diesel Fuel;

5.4.6(a)(iii) The number of such Nonroad Vehicles that utilized the best available technology for reducing the emission of pollutants, including a breakdown by vehicle model and the type of technology;

5.4.6(a)(iv) The number of such Nonroad Vehicles that utilized such other authorized technology in accordance with Article 5.4.3, including a breakdown by vehicle model and the type of technology used for each such vehicle;

5.4.6(a)(v) The locations where such Nonroad Vehicles were used; and

5.4.6(a)(vi) Where a determination is in effect pursuant to Article 5.4.2(b) or 5.4.2(c), detailed information concerning the **Contractor's** efforts to obtain Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm).

5.4.6(b) The **Contractor** shall submit the information required by Article 5.4.6(a) at the completion of **Work** under the Public Works Contract and on a yearly basis no later than August 1 throughout the term of the Public Works Contract. The yearly report shall cover **Work** performed during the preceding fiscal year (July 1 - June 30).

5.5 Ultra Low Sulfur Diesel Fuel. In accordance with the Coordinated Construction Act for Lower Manhattan, as amended:

5.5.1 Definitions. For purposes of this Article 5.5, the following definitions apply:

5.5.1(a) "Lower Manhattan" means the area to the south of and within the following lines: a line beginning at a point where the United States pierhead line in the Hudson River as it exists now or may be extended would intersect with the southerly line of West Houston Street in the Borough of Manhattan extended, thence easterly along the southerly side of West Houston Street to the southerly side of Houston Street, thence easterly along the southerly side of Houston Street to the southerly side of East Houston Street, thence northeasterly along the southerly side of East Houston Street to the point where it would intersect with the United States pierhead line in the East River as it exists now or may be extended, including tax lots within or immediately adjacent thereto.

5.5.1(b) "Lower Manhattan Redevelopment Project" means any project in Lower Manhattan that is funded in whole or in part with federal or State funding, or any project intended to improve transportation between Lower Manhattan and the two air terminals in the **City** known as LaGuardia Airport and John F. Kennedy International Airport, or between Lower Manhattan and the air terminal in Newark known as Newark Liberty International Airport, and that is funded in whole or in part with federal funding.

5.5.1(c) "Nonroad Engine" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.5.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower (HP) and greater, and that is not a Motor Vehicle or a vehicle used

solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this terms shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) HP or less and that are not used in any construction program or project.

5.5.1(e) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.5.2 Requirements. **Contractors** and **Subcontractors** are required to use only Ultra Low Sulfur Diesel Fuel to power the diesel-powered Nonroad Vehicles with engine HP rating of fifty (50) HP and above used on a Lower Manhattan Redevelopment Project and, where practicable, to reduce the emission of pollutants by retrofitting such Nonroad Vehicles with oxidation catalysts, particulate filters, or technology that achieves lowest particulate matter emissions.

5.6 Pesticides. In accordance with Section 17-1209 of the Administrative Code, to the extent that the **Contractor** or any **Subcontractor** applies pesticides to any property owned or leased by the **City**, the **Contractor**, and any **Subcontractor** shall comply with Chapter 12 of the Administrative Code.

5.7 Waste Treatment, Storage, and Disposal Facilities and Transporters. In connection with the **Work**, the **Contractor** and any **Subcontractor** shall use only those waste treatment, storage, and disposal facilities and waste transporters that possess the requisite license, permit or other governmental approval necessary to treat, store, dispose, or transport the waste, materials or hazardous substances.

5.8 Environmentally Preferable Purchasing. The **Contractor** shall ensure that products purchased or leased by the **Contractor** or any **Subcontractor** for the **Work** that are not specified by the **City** or are submitted as equivalents to a product specified by the **City** comply with the requirements of the New York City Environmentally Preferable Purchasing Program contained in Chapter 11 of Title 43 of the RCNY, pursuant to Chapter 3 of Title 6 of the Administrative Code.

ARTICLE 6. INSPECTION

6.1 During the progress of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall at all times afford the representatives of the **City** every reasonable, safe, and proper facility for inspecting all **Work** done or being done at the **Site** and also for inspecting the manufacture or preparation of materials and equipment at the place of such manufacture or preparation.

6.2 The **Contractor's** obligation hereunder shall include the uncovering or taking down of finished **Work** and its restoration thereafter; provided, however, that the order to uncover, take down and restore shall be in writing, and further provided that if **Work** thus exposed proves satisfactory, and if the **Contractor** has complied with Article 6.1, such uncovering or taking down and restoration shall be considered an item of **Extra Work** to be paid for in accordance with the provisions of Article 26. If the **Work** thus exposed proves unsatisfactory, the **City** has no obligation to compensate the **Contractor** for the uncovering, taking down or restoration.

6.3 Inspection and approval by the **Commissioner**, the **Engineer**, **Project Manager**, or **Resident Engineer**, of finished **Work** or of **Work** being performed, or of materials and equipment at the place of manufacture or preparation, shall not relieve the **Contractor** of its obligation to perform the **Work** in strict accordance with the **Contract**. Finished or unfinished **Work** not found to be in strict accordance with the

Contract shall be replaced as directed by the **Engineer**, even though such **Work** may have been previously approved and paid for. Such corrective **Work** is **Contract Work** and shall not be deemed **Extra Work**.

6.4 Rejected **Work** and materials shall be promptly taken down and removed from the **Site**, which must at all times be kept in a reasonably clean and neat condition.

ARTICLE 7. PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION

7.1 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall be under an absolute obligation to protect the finished and unfinished **Work** against any damage, loss, injury, theft and/or vandalism and in the event of such damage, loss, injury, theft and/or vandalism, it shall promptly replace and/or repair such **Work** at the **Contractor's** sole cost and expense, as directed by the **Resident Engineer**. The obligation to deliver finished **Work** in strict accordance with the **Contract** prior to **Final Acceptance** shall be absolute and shall not be affected by the **Resident Engineer's** approval of, or failure to prohibit, the **Means and Methods of Construction** used by the **Contractor**.

7.2 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall take all reasonable precautions to protect all persons and the property of the **City** and of others from damage, loss or injury resulting from the **Contractor's**, and/or its **Subcontractors'** operations under this **Contract**. The **Contractor's** obligation to protect shall include the duty to provide, place or replace, and adequately maintain at or about the **Site** suitable and sufficient protection such as lights, barricades, and enclosures.

7.3 The **Contractor** shall comply with the notification requirements set forth below in the event of any loss, damage or injury to **Work**, persons or property, or any accidents arising out of the operations of the **Contractor** and/or its **Subcontractors** under this **Contract**.

7.3.1 The **Contractor** shall make a full and complete report in writing to the **Resident Engineer** within three (3) **Days** after the occurrence.

7.3.2 The **Contractor** shall also send written notice of any such event to all insurance carriers that issued potentially responsive policies (including commercial general liability insurance carriers for events relating to the **Contractor's** own employees) no later than twenty (20) days after such event and again no later than twenty (20) days after the initiation of any claim and/or action resulting therefrom. Such notice shall contain the following information: the number of the insurance policy, the name of the Named Insured, the date and location of the incident, and the identity of the persons injured or property damaged. For any policy on which the **City** and/or the **Engineer, Architect, or Project Manager** are Additional Insureds, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Additional Insured, such other Additional Insureds, as well as the Named Insured."

7.3.2(a) Whenever such notice is sent under a policy on which the **City** is an Additional Insured, the **Contractor** shall provide copies of the notice to the **Comptroller, the Commissioner** and the **City Corporation Counsel**. The copy to the **Comptroller** shall be sent to the Insurance Unit, NYC Comptroller's Office, 1 Centre Street – Room 1222, New York, New York, 10007. The copy to the **Commissioner** shall be sent to the address set forth in Schedule A of the General Conditions. The copy to the **City Corporation Counsel** shall be sent to Insurance Claims Specialist, Affirmative Litigation

Division, New York City Law Department, 100 Church Street, New York, New York 10007.

7.3.2(b) If the **Contractor** fails to provide any of the foregoing notices to any appropriate insurance carrier(s) in a timely and complete manner, the **Contractor** shall indemnify the **City** for all losses, judgments, settlements, and expenses, including reasonable attorneys' fees, arising from an insurer's disclaimer of coverage citing late notice by or on behalf of the **City**.

7.4 To the fullest extent permitted by law, the **Contractor** shall defend, indemnify, and hold the **City**, its employees, and officials (the "Indemnitees") harmless against any and all claims (including but not limited to claims asserted by any employee of the **Contractor** and/or its **Subcontractors**) and costs and expenses of whatever kind (including but not limited to payment or reimbursement of attorneys' fees and disbursements) allegedly arising out of or in any way related to the operations of the **Contractor** and/or its **Subcontractors** in the performance of this **Contract** or from the **Contractor's** and/or its **Subcontractors'** failure to comply with any of the provisions of this **Contract** or of the **Law**. Such costs and expenses shall include all those incurred in defending the underlying claim and those incurred in connection with the enforcement of this Article 7.4 by way of cross-claim, third-party claim, declaratory action or otherwise. The parties expressly agree that the indemnification obligation hereunder contemplates (1) full indemnity in the event of liability imposed against the Indemnitees without negligence and solely by reason of statute, operation of **Law** or otherwise; and (2) partial indemnity in the event of any actual negligence on the part of the Indemnitees either causing or contributing to the underlying claim (in which case, indemnification will be limited to any liability imposed over and above that percentage attributable to actual fault whether by statute, by operation of **Law**, or otherwise). Where partial indemnity is provided hereunder, all costs and expenses shall be indemnified on a pro rata basis.

7.4.1 Indemnification under Article 7.4 or any other provision of the **Contract** shall operate whether or not **Contractor** or its **Subcontractors** have placed and maintained the insurance specified under Article 22.

7.5 The provisions of this Article 7 shall not be deemed to create any new right of action in favor of third parties against the **Contractor** or the **City**.

CHAPTER III: TIME PROVISIONS

ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK

8.1 The **Contractor** shall commence the **Work** on the date specified in the **Notice to Proceed** or the **Order to Work**. The time for performance of the **Work** under the **Contract** shall be computed from the date specified in the **Notice to Proceed** or the **Order to Work**. **TIME BEING OF THE ESSENCE** to the **City**, the **Contractor** shall thereafter prosecute the **Work** diligently, using such **Means and Methods of Construction** as are in accord with Article 4 herein and as will assure its completion not later than the date specified in this **Contract**, or on the date to which the time for completion may be extended.

ARTICLE 9. PROGRESS SCHEDULES

9.1 To enable the **Work** to be performed in an orderly and expeditious manner, the **Contractor**, within fifteen (15) **Days** after the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Engineer**, shall submit to the **Engineer** a proposed progress schedule based on the Critical Path Method in the form of

a bar graph or in such other form as specified by the **Engineer**, and monthly cash flow requirements, showing:

9.1.1 The anticipated time of commencement and completion of each of the various operations to be performed under this **Contract**; and

9.1.2 The sequence and interrelation of each of these operations with the others and with those of other related contracts; and

9.1.3 The estimated time required for fabrication or delivery, or both, of all materials and equipment required for the **Work**, including the anticipated time for obtaining required approvals pursuant to Article 10; and

9.1.4 The estimated amount in dollars the **Contractor** will claim on a monthly basis.

9.2 The proposed schedule shall be revised as directed by the **Engineer**, until finally approved by the **Engineer**, and after such approval, subject to the provisions of Article 11, shall be strictly adhered to by the **Contractor**.

9.3 If the **Contractor** shall fail to adhere to the approved progress schedule, or to the schedule as revised pursuant to Article 11, it shall promptly adopt such other or additional **Means and Methods of Construction**, at its sole cost and expense, as will make up for the time lost and will assure completion in accordance with the approved progress schedule. The approval by the **City** of a progress schedule which is shorter than the time allotted under the **Contract** shall not create any liability for the **City** if the approved progress schedule is not met.

9.4 The **Contractor** will not receive any payments until the proposed progress schedule is submitted.

ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL

10.1 From time to time as the **Work** progresses and in the sequence indicated by the approved progress schedule, the **Contractor** shall submit to the **Engineer** a specific request in writing for each item of information or approval required by the **Contractor**. These requests shall state the latest date upon which the information or approval is actually required by the **Contractor**, and shall be submitted in a reasonable time in advance thereof to provide the **Engineer** a sufficient time to act upon such submissions, or any necessary re-submissions thereof.

10.2 The **Contractor** shall not have any right to an extension of time on account of delays due to the **Contractor's** failure to submit requests for the required information or the required approval in accordance with the above requirements.

ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY

11.1 After the commencement of any condition which is causing or may cause a delay in completion of the **Work**, including conditions for which the **Contractor** may be entitled to an extension of time, the following notifications and submittals are required:

11.1.1 Within fifteen (15) **Days** after the **Contractor** becomes aware or reasonably should be

aware of each such condition, the **Contractor** must notify the **Resident Engineer** or **Engineer**, as directed by the **Commissioner**, in writing of the existence, nature and effect of such condition upon the approved progress schedule and the **Work**, and must state why and in what respects, if any, the condition is causing or may cause a delay. Such notice shall include a description of the construction activities that are or could be affected by the condition and may include any recommendations the **Contractor** may have to address the delay condition and any activities the **Contractor** may take to avoid or minimize the delay.

11.1.2 If the **Contractor** shall claim to be sustaining damages for delay as provided for in this Article 11, within forty-five (45) **Days** from the time such damages are first incurred for each such condition, the **Contractor** shall submit to the **Commissioner** a verified written statement of the details and estimates of the amounts of such damages, including categories of expected damages and projected monthly costs, together with documentary evidence of such damages as the **Contractor** may have at the time of submission (“statement of delay damages”), as further detailed in Article 11.6. The **Contractor** may submit the above statement within such additional time as may be granted by the **Commissioner** in writing upon written request therefor.

11.1.3 Articles 11.1.1 and 11.1.2 do not relieve the **Contractor** of its obligation to comply with the provisions of Article 44.

11.2 Failure of the **Contractor** to strictly comply with the requirements of Article 11.1.1 may, in the discretion of the **Commissioner**, be deemed sufficient cause to deny any extension of time on account of delay arising out of such condition. Failure of the **Contractor** to strictly comply with the requirements of both Articles 11.1.1 and 11.1.2 shall be deemed a conclusive waiver by the **Contractor** of any and all claims for damages for delay arising from such condition and no right to recover on such claims shall exist.

11.3 When appropriate and directed by the **Engineer**, the progress schedule shall be revised by the **Contractor** until finally approved by the **Engineer**. The revised progress schedule must be strictly adhered to by the **Contractor**.

11.4 Compensable Delays

11.4.1 The **Contractor** agrees to make claim only for additional costs attributable to delay in the performance of this **Contract** necessarily extending the time for completion of the **Work** or resulting from acceleration directed by the **Commissioner** and required to maintain the progress schedule, occasioned solely by any act or omission to act of the **City** listed below. The **Contractor** also agrees that delay from any other cause shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**.

11.4.1.1 The failure of the **City** to take reasonable measures to coordinate and progress the **Work** to the extent required by the **Contract**, except that the **City** shall not be responsible for the **Contractor’s** obligation to coordinate and progress the **Work** of its **Subcontractors**.

11.4.1.2 Unreasonable delays attributable to the review of shop drawings, the issuance of change orders, or the cumulative impact of change orders that were not brought about by any act or omission of the **Contractor**.

11.4.1.3 The unavailability of the **Site** caused by acts or omissions of the **City**.

11.4.1.4 The issuance by the **Engineer** of a stop work order that was not brought about through any act or omission of the **Contractor**.

11.4.1.5 Differing site conditions or environmental hazards that were neither known nor reasonably ascertainable on a pre-bid inspection of the **Site** or review

of the bid documents or other publicly available sources, and that are not ordinarily encountered in the **Project's** geographical area or neighborhood or in the type of **Work** to be performed.

11.4.1.6 Delays caused by the **City's** bad faith or its willful, malicious, or grossly negligent conduct;

11.4.1.7 Delays not contemplated by the parties;

11.4.1.8 Delays so unreasonable that they constitute an intentional abandonment of the **Contract** by the **City**; and

11.4.1.9 Delays resulting from the **City's** breach of a fundamental obligation of the **Contract**.

11.4.2 No claim may be made for any alleged delay in **Substantial Completion** of the **Work** if the **Work** will be or is substantially completed by the date of **Substantial Completion** provided for in Schedule A unless acceleration has been directed by the **Commissioner** to meet the date of **Substantial Completion** set forth in Schedule A, or unless there is a provision in the **Contract** providing for additional compensation for early completion.

11.4.3 The provisions of this Article 11 apply only to claims for additional costs attributable to delay and do not preclude determinations by the **Commissioner** allowing reimbursements for additional costs for **Extra Work** pursuant to Articles 25 and 26 of this **Contract**. To the extent that any cost attributable to delay is reimbursed as part of a change order, no additional claim for compensation under this Article 11 shall be allowed.

11.5 Non-Compensable Delays. The **Contractor** agrees to make no claim for, and is deemed to have included in its bid prices for the various items of the **Contract**, the extra/additional costs attributable to any delays caused by or attributable to the items set forth below. For such items, the **Contractor** shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**, in accordance with the provisions of Article 13. Such extensions of time will be granted, if at all, pursuant to the grounds set forth in Article 13.3.

11.5.1 The acts or omissions of any third parties, including but not limited to **Other Contractors**, public/ governmental bodies (other than **City Agencies**), utilities or private enterprises, who are disclosed in the **Contract Documents** or are ordinarily encountered or generally recognized as related to the **Work**;

11.5.2 Any situation which was within the contemplation of the parties at the time of entering into the **Contract**, including any delay indicated or disclosed in the **Contract Documents** or that would be generally recognized by a reasonably prudent contractor as related to the nature of the **Work**, and/or the existence of any facility or appurtenance owned, operated or maintained by any third party, as indicated or disclosed in the **Contract Documents** or ordinarily encountered or generally recognized as related to the nature of the **Work**;

11.5.3 Restraining orders, injunctions or judgments issued by a court which were caused by a Contractor's submission, action or inaction or by a Contractor's **Means and Methods of Construction**, or by third parties, unless such order, injunction or judgment was the result of an act or omission by the **City**;

11.5.4 Any labor boycott, strike, picketing, lockout or similar situation;

11.5.5 Any shortages of supplies or materials, or unavailability of equipment, required by the **Contract Work**;

11.5.6 Climatic conditions, storms, floods, droughts, tidal waves, fires, hurricanes, earthquakes, landslides or other catastrophes or acts of God, or acts of war or of the public enemy or terrorist acts, including the **City's** reasonable responses thereto; and

11.5.7 **Extra Work** which does not significantly affect the overall completion of the **Contract**, reasonable delays in the review or issuance of change orders or field orders and/or in shop drawing reviews or approvals.

11.6 Required Content of Submission of Statement of Delay Damages

11.6.1 In the verified written statement of delay damages required by Article 11.1.2, the following information shall be provided by the **Contractor**:

11.6.1.1 For each delay, the start and end dates of the claimed periods of delay and, in addition, a description of the operations that were delayed, an explanation of how they were delayed, and the reasons for the delay, including identifying the applicable act or omission of the City listed in Article 11.4.

11.6.1.2 A detailed factual statement of the claim providing all necessary dates, locations and items of **Work** affected by the claim.

11.6.1.3 The estimated amount of additional compensation sought and a breakdown of that amount into categories as described in Article 11.7.

11.6.1.4 Any additional information requested by the **Commissioner**.

11.7 Recoverable Costs

11.7.1 Delay damages may be recoverable for the following costs actually and necessarily incurred in the performance of the **Work**:

11.7.1.1 Direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits, based on time and materials records;

11.7.1.2 Necessary materials (including transportation to the **Site**), based on time and material records;

11.7.1.3 Reasonable rental value of necessary plant and equipment other than small tools, plus fuel/energy costs according to the applicable formula set forth in Articles 26.2.4 and/or 26.2.8, based on time and material records;

11.7.1.4 Additional insurance and bond costs;

11.7.1.5 Extended **Site** overhead, field office rental, salaries of field office staff, on-site project managers and superintendents, field office staff vehicles, **Project**-specific storage, field office utilities and telephone, and field office consumables;

11.7.1.6 Labor escalation costs based on actual costs;

11.7.1.7 Materials and equipment escalation costs based on applicable industry indices unless documentation of actual increased cost is provided;

11.7.1.8 Additional material and equipment storage costs based on actual documented costs and additional costs necessitated by extended manufacturer warranty periods; and

11.7.1.9 Extended home office overhead calculated based on the following formula:

(1) Subtract from the original **Contract** amount the amount earned by original contractual **Substantial Completion** date (not

- including change orders);
- (2) Remove 15% overhead and profit from the calculation in item (1) by dividing the results of item (1) by 1.15;
- (3) Multiply the result of item (2) by 7.25% for the total home office overhead;
- (4) Multiply the result of item (3) by 7.25% for the total profit; and
- (5) The total extended home office overhead will be the total of items (3) and (4).

11.7.2 Recoverable Subcontractor Costs. When the **Work** is performed by a **Subcontractor**, the **Contractor** may be paid the actual and necessary costs of such subcontracted **Work** as outlined above in Articles 11.7.1.1 through 11.7.1.8, and an additional overhead of 5% of the costs outlined in Articles 11.7.1.1 through 11.7.1.3.

11.7.3 Non-Recoverable Costs. The parties agree that the **City** will have no liability for the following items and the **Contractor** agrees it shall make no claim for the following items:

11.7.3.1 Profit, or loss of anticipated or unanticipated profit, except as provided in Article 11.7.1.9;

11.7.3.2 Consequential damages, including, but not limited to, construction or bridge loans or interest paid on such loans, loss of bonding capacity, bidding opportunities, or interest in investment, or any resulting insolvency;

11.7.3.3 Indirect costs or expenses of any nature except those included in Article 11.7.1;

11.7.3.4 Direct or indirect costs attributable to performance of **Work** where the **Contractor**, because of situations or conditions within its control, has not progressed the **Work** in a satisfactory manner; and

11.7.3.5 Attorneys' fees and dispute and claims preparation expenses.

11.8 Any claims for delay under this Article 11 are not subject to the jurisdiction of the Contract Dispute Resolution Board pursuant to the dispute resolution process set forth in Article 27.

11.9 Any compensation provided to the **Contractor** in accordance with this Article 11 will be made pursuant to a claim filed with the **Comptroller**. Nothing in this Article 11 extends the time for the **Contractor** to file an action with respect to a claim within six months after **Substantial Completion** pursuant to Article 56.

ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS

12.1 During the progress of the **Work**, **Other Contractors** may be engaged in performing other work or may be awarded other contracts for additional work on this **Project**. In that event, the **Contractor** shall coordinate the **Work** to be done hereunder with the work of such **Other Contractors** and the **Contractor** shall fully cooperate with such **Other Contractors** and carefully fit its own **Work** to that provided under other contracts as may be directed by the **Engineer**. The **Contractor** shall not commit or permit any act which will interfere with the performance of work by any **Other Contractors**.

12.2 If the **Engineer** determines that the **Contractor** is failing to coordinate its **Work** with the work of **Other Contractors** as the **Engineer** has directed, then the **Commissioner** shall have the right to withhold any payments otherwise due hereunder until the **Contractor** completely complies with the **Engineer's** directions.

12.3 The **Contractor** shall notify the **Engineer** in writing if any **Other Contractor** on this **Project** is failing to coordinate its work with the **Work** of this **Contract**. If the **Engineer** finds such charges to be true, the **Engineer** shall promptly issue such directions to the **Other Contractor** with respect thereto as the situation may require. The **City** shall not, however, be liable for any damages suffered by any **Other Contractor's** failure to coordinate its work with the **Work** of this **Contract** or by reason of the **Other Contractor's** failure to promptly comply with the directions so issued by the **Engineer**, or by reason of any **Other Contractor's** default in performance, it being understood that the **City** does not guarantee the responsibility or continued efficiency of any contractor. The **Contractor** agrees to make no claim against the **City** for any damages relating to or arising out of any directions issued by the **Engineer** pursuant to this Article 12 (including but not limited to the failure of any **Other Contractor** to comply or promptly comply with such directions), or the failure of any **Other Contractor** to coordinate its work, or the default in performance of any **Other Contractor**.

12.4 The **Contractor** shall indemnify and hold the **City** harmless from any and all claims or judgments for damages and from costs and expenses to which the **City** may be subjected or which it may suffer or incur by reason of the **Contractor's** failure to comply with the **Engineer's** directions promptly; and the **Comptroller** shall have the right to exercise the powers reserved in Article 23 with respect to any claims which may be made for damages due to the **Contractor's** failure to comply with the **Engineer's** directions promptly. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.5 Should the **Contractor** sustain any damage through any act or omission of any **Other Contractor** having a contract with the **City** for the performance of work upon the **Site** or of work which may be necessary to be performed for the proper prosecution of the **Work** to be performed hereunder, or through any act or omission of a subcontractor of such **Other Contractor**, the **Contractor** shall have no claim against the **City** for such damage, but shall have a right to recover such damage from the **Other**

12.5 **Contractor** under the provision similar to the following provisions which apply to this Contract and have been or will be inserted in the contracts with such Other Contractors:

12.5.1 Should any **Other Contractor** having or who shall hereafter have a contract with the **City** for the performance of work upon the **Site** sustain any damage through any act or omission of the **Contractor** hereunder or through any act or omission of any **Subcontractor** of the **Contractor**, the **Contractor** agrees to reimburse such **Other Contractor** for all such damages and to defend at its own expense any action based upon such claim and if any judgment or claim (even if the allegations of the action are without merit) against the **City** shall be allowed the **Contractor** shall pay or satisfy such judgment or claim and pay all costs and expenses in connection therewith and agrees to indemnify and hold the **City** harmless from all such claims. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.6 The **City's** right to indemnification hereunder shall in no way be diminished, waived or discharged by its recourse to assessment of liquidated damages as provided in Article 15, or by the exercise of any other remedy provided for by **Contract** or by **Law**.

ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE

13.1 If performance by the **Contractor** is delayed for a reason set forth in Article 13.3, the **Contractor** may be allowed a reasonable extension of time in conformance with this Article 13 and the **PPB**

Rules.

13.2 Any extension of time may be granted only by the **ACCO** or by the Board for the Extension of Time (hereafter “Board”) (as set forth below) upon written application by the **Contractor**.

13.3 Grounds for Extension: If such application is made, the **Contractor** shall be entitled to an extension of time for delay in completion of the **Work** caused solely:

13.3.1 By the acts or omissions of the **City**, its officials, agents or employees; or

13.3.2 By the act or omissions of **Other Contractors** on this **Project**; or

13.3.3 By supervening conditions entirely beyond the control of either party hereto (such as, but not limited to, acts of God or the public enemy, excessive inclement weather, war or other national emergency making performance temporarily impossible or illegal, or strikes or labor disputes not brought about by any act or omission of the **Contractor**).

13.3.4 The **Contractor** shall, however, be entitled to an extension of time for such causes only for the number of **Days** of delay which the **ACCO** or the Board may determine to be due solely to such causes, and then only if the **Contractor** shall have strictly complied with all of the requirements of Articles 9 and 10.

13.4 The **Contractor** shall not be entitled to receive a separate extension of time for each of several causes of delay operating concurrently, but, if at all, only for the actual period of delay in completion of the **Work** as determined by the **ACCO** or the Board, irrespective of the number of causes contributing to produce such delay. If one of several causes of delay operating concurrently results from any act, fault or omission of the **Contractor** or of its **Subcontractors** or **Materialmen**, and would of itself (irrespective of the concurrent causes) have delayed the **Work**, no extension of time will be allowed for the period of delay resulting from such act, fault or omission.

13.5 The determination made by the **ACCO** or the Board on an application for an extension of time shall be binding and conclusive on the **Contractor**.

13.6 The **ACCO** or the Board acting entirely within their discretion may grant an application for an extension of time for causes of delay other than those herein referred.

13.7 Permitting the **Contractor** to continue with the **Work** after the time fixed for its completion has expired, or after the time to which such completion may have been extended has expired, or the making of any payment to the **Contractor** after such time, shall in no way operate as a waiver on the part of the **City** of any of its rights under this **Contract**.

13.8 Application for Extension of Time:

13.8.1 Before the **Contractor’s** time extension request will be considered, the **Contractor** shall notify the **ACCO** of the condition which allegedly has caused or is causing the delay, and shall submit a written application to the **ACCO** identifying:

13.8.1(a) The **Contractor**; the registration number; and **Project** description;

13.8.1(b) Liquidated damage assessment rate, as specified in the **Contract**;

13.8.1(c) Original total bid price;

13.8.1(d) The original **Contract** start date and completion date;

13.8.1(e) Any previous time extensions granted (number and duration); and

13.8.1(f) The extension of time requested.

13.8.2 In addition, the application for extension of time shall set forth in detail:

13.8.2(a) The nature of each alleged cause of delay in completing the **Work**;

13.8.2(b) The date upon which each such cause of delay began and ended and the number of **Days** attributable to each such cause;

13.8.2(c) A statement that the **Contractor** waives all claims except for those delineated in the application, and the particulars of any claims which the **Contractor** does not agree to waive. For time extensions for **Substantial Completion** and final completion payments, the application shall include a detailed statement of the dollar amounts of each element of claim item reserved; and

13.8.2(d) A statement indicating the **Contractor's** understanding that the time extension is granted only for purposes of permitting continuation of **Contract** performance and payment for **Work** performed and that the **City** retains its right to conduct an investigation and assess liquidated damages as appropriate in the future.

13.9 Analysis and Approval of Time Extensions:

13.9.1 For time extensions for partial payments, a written determination shall be made by the **ACCO** who may, for good and sufficient cause, extend the time for the performance of the **Contract** as follows:

13.9.1(a) If the **Work** is to be completed within six (6) months, the time for performance may be extended for sixty (60) **Days**;

13.9.1(b) If the **Work** is to be completed within less than one (1) year but more than six (6) months, an extension of ninety (90) **Days** may be granted;

13.9.1(c) If the **Contract** period exceeds one (1) year, besides the extension granted in Article 13.9.1(b), an additional thirty (30) **Days** may be granted for each multiple of six (6) months involved beyond the one (1) year period; or

13.9.1(d) If exceptional circumstances exist, the **ACCO** may extend the time for performance beyond the extensions in Articles 13.9.1(a), 13.9.1(b), and 13.9.1(c). In that event, the **ACCO** shall file with the Mayor's Office of Contract Services a written explanation of the exceptional circumstances.

13.9.2 For extensions of time for **Substantial Completion** and final completion payments, the **Engineer**, in consultation with the **ACCO**, shall prepare a written analysis of the delay (including a preliminary determination of the causes of delay, the beginning and end dates for each such cause of delay, and whether the delays are excusable under the terms of this **Contract**). The report shall be subject to review by and approval of the Board, which shall have authority to question its analysis and determinations and request additional facts or documentation. The report as reviewed and made final by the Board shall be made a part of the **Agency** contract file. Neither the report itself nor anything contained therein shall operate as a

waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

13.9.3 Approval Mechanism for Time Extensions for **Substantial Completion** or Final Completion Payments: An extension shall be granted only with the approval of the Board which is comprised of the **ACCO** of the **Agency**, the **City** Corporation Counsel, and the **Comptroller**, or their authorized representatives.

13.9.4 Neither the granting of any application for an extension of time to the **Contractor** or any **Other Contractor** on this **Project** nor the papers, records or reports related to any application for or grant of an extension of time or determination related thereto shall be referred to or offered in evidence by the **Contractor** or its attorneys in any action or proceeding.

13.10 No Damage for Delay: The **Contractor** agrees to make no claim for damages for delay in the performance of this **Contract** occasioned by any act or omission to act of the **City** or any of its representatives, except as provided for in Article 11.

ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK

14.1 Date for **Substantial Completion**: The **Contractor** shall substantially complete the **Work** within the time fixed in Schedule A of the General Conditions, or within the time to which such **Substantial Completion** may be extended.

14.2 Determining the Date of **Substantial Completion**: The **Work** will be deemed to be substantially complete when the two conditions set forth below have been met.

14.2.1 Inspection: The **Engineer** or **Resident Engineer**, as applicable, has inspected the **Work** and has made a written determination that it is substantially complete.

14.2.2 Approval of **Final Approved Punch List** and Date for **Final Acceptance**: Following inspection of the **Work**, the **Engineer/Resident Engineer** shall furnish the **Contractor** with a final punch list, specifying all items of **Work** to be completed and proposing dates for the completion of each specified item of **Work**. The **Contractor** shall then submit in writing to the **Engineer/Resident Engineer** within ten (10) **Days** of the **Engineer/Resident Engineer** furnishing the final punch list either acceptance of the dates or proposed alternative dates for the completion of each specified item of **Work**. If the **Contractor** neither accepts the dates nor proposes alternative dates within ten (10) **Days**, the schedule proposed by the **Engineer/Resident Engineer** shall be deemed accepted. If the **Contractor** proposes alternative dates, then, within a reasonable time after receipt, the **Engineer/Resident Engineer**, in a written notification to the **Contractor**, shall approve the **Contractor's** completion dates or, if they are unable to agree, the **Engineer/Resident Engineer** shall establish dates for the completion of each item of **Work**. The latest completion date specified shall be the date for **Final Acceptance** of the **Work**.

14.3 Date of **Substantial Completion**. The date of approval of the **Final Approved Punch List**, shall be the date of **Substantial Completion**. The date of approval of the **Final Approved Punch List** shall be either (a) if the **Contractor** approves the final punch list and proposed dates for completion furnished by the **Engineer/Resident Engineer**, the date of the **Contractor's** approval; or (b) if the **Contractor** neither accepts the dates nor proposes alternative dates, ten (10) **Days** after the **Engineer/Resident Engineer** furnishes the **Contractor** with a final punch list and proposed dates for completion; or (c) if the **Contractor** proposes alternative dates, the date that the **Engineer/Resident Engineer** sends written notification to the

Contractor either approving the **Contractor's** proposed alternative dates or establishing dates for the completion for each item of **Work**.

14.4 Determining the Date of **Final Acceptance**: The **Work** will be accepted as final and complete as of the date of the **Engineer's/Resident Engineer's** inspection if, upon such inspection, the **Engineer/Resident Engineer** finds that all items on the **Final Approved Punch List** are complete and no further **Work** remains to be done. The **Commissioner** will then issue a written determination of **Final Acceptance**.

14.5 Request for Inspection: Inspection of the **Work** by the **Engineer/Resident Engineer** for the purpose of **Substantial Completion** or **Final Acceptance** shall be made within fourteen (14) **Days** after receipt of the **Contractor's** written request therefor.

14.6 Request for Re-inspection: If upon inspection for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer/Resident Engineer** determines that there are items of **Work** still to be performed, the **Contractor** shall promptly perform them and then request a re-inspection. If upon re-inspection, the **Engineer/Resident Engineer** determines that the **Work** is substantially complete or finally accepted, the date of such re-inspection shall be the date of **Substantial Completion** or **Final Acceptance**. Re-inspection by the **Engineer/Resident Engineer** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.7 Initiation of Inspection by the **Engineer/Resident Engineer**: If the **Contractor** does not request inspection or re-inspection of the **Work** for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer/Resident Engineer** may initiate such inspection or re-inspection.

ARTICLE 15. LIQUIDATED DAMAGES

15.1 In the event the **Contractor** fails to substantially complete the **Work** within the time fixed for such **Substantial Completion** in Schedule A of the General Conditions, plus authorized time extensions, or if the **Contractor**, in the sole determination of the **Commissioner**, has abandoned the **Work**, the **Contractor** shall pay to the **City** the sum fixed in Schedule A of the General Conditions, for each and every **Day** that the time consumed in substantially completing the **Work** exceeds the time allowed therefor; which said sum, in view of the difficulty of accurately ascertaining the loss which the **City** will suffer by reason of delay in the **Substantial Completion** of the **Work** hereunder, is hereby fixed and agreed as the liquidated damages that the **City** will suffer by reason of such delay, and not as a penalty. This Article 15 shall also apply to the **Contractor** whether or not the **Contractor** is defaulted pursuant to Chapter X of this **Contract**. Neither the failure to assess liquidated damages nor the granting of any time extension shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

15.2 Liquidated damages received hereunder are not intended to be nor shall they be treated as either a partial or full waiver or discharge of the **City's** right to indemnification, or the **Contractor's** obligation to indemnify the **City**, or to any other remedy provided for in this **Contract** or by **Law**.

15.3 The **Commissioner** may deduct and retain out of the monies which may become due hereunder, the amount of any such liquidated damages; and in case the amount which may become due hereunder shall be less than the amount of liquidated damages suffered by the **City**, the **Contractor** shall be liable to pay the difference.

ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION

16.1 Unless otherwise provided for in the **Specifications**, the **Commissioner** may take over, use, occupy or operate any part of the **Work** at any time prior to **Final Acceptance**, upon written notification to the **Contractor**. The **Engineer** or **Resident Engineer**, as applicable, shall inspect the part of the **Work** to be taken over, used, occupied, or operated, and will furnish the **Contractor** with a written statement of the **Work**, if any, which remains to be performed on such part. The **Contractor** shall not object to, nor interfere with, the **Commissioner's** decision to exercise the rights granted by Article 16. In the event the **Commissioner** takes over, uses, occupies, or operates any part of the **Work**:

16.1.1 the **Engineer/Resident Engineer** shall issue a written determination of **Substantial Completion** with respect to such part of the **Work**;

16.1.2 the **Contractor** shall be relieved of its absolute obligation to protect such part of the unfinished **Work** in accordance with Article 7;

16.1.3 the **Contractor's** guarantee on such part of the **Work** shall begin on the date of such use by the **City**; and;

16.1.4 the **Contractor** shall be entitled to a return of so much of the amount retained in accordance with Article 21 as it relates to such part of the **Work**, except so much thereof as may be retained under Articles 24 and 44.

CHAPTER IV: SUBCONTRACTS AND ASSIGNMENTS

ARTICLE 17. SUBCONTRACTS

17.1 The **Contractor** shall not make subcontracts totaling an amount more than the percentage of the total **Contract** price fixed in Schedule A of the General Conditions, without prior written permission from the **Commissioner**. All subcontracts made by the **Contractor** shall be in writing. No **Work** may be performed by a **Subcontractor** prior to the **Contractor** entering into a written subcontract with the **Subcontractor** and complying with the provisions of this Article 17.

17.2 Before making any subcontracts, the **Contractor** shall submit a written statement to the **Commissioner** giving the name and address of the proposed **Subcontractor**; the portion of the **Work** and materials which it is to perform and furnish; the cost of the subcontract; the VENDEX questionnaire if required; the proposed subcontract if requested by the **Commissioner**; and any other information tending to prove that the proposed **Subcontractor** has the necessary facilities, skill, integrity, past experience, and financial resources to perform the **Work** in accordance with the terms and conditions of this **Contract**.

17.3 In addition to the requirements in Article 17.2, **Contractor** is required to list the **Subcontractor** in the web based Subcontractor Reporting System through the City's Payee Information Portal (PIP), available at www.nyc.gov/pip.¹ For each **Subcontractor** listed, **Contractor** is required to provide the following information: maximum contract value, description of **Subcontractor's** Work, start and end date of the subcontract and identification of the **Subcontractor's** industry. Thereafter, **Contractor** will be required to report in the system the payments made to each **Subcontractor** within 30 days of making the

¹ In order to use the new system, a PIP account will be required. Detailed instructions on creating a PIP account and using the new system are also available at www.nyc.gov/pip. Additional assistance with PIP may be obtained by emailing the Financial Information Services Agency Help Desk at pip@fisa.nyc.gov.

payment. If any of the required information changes throughout the Term of the **Contract**, **Contractor** will be required to revise the information in the system.

Failure of the **Contractor** to list a **Subcontractor** and/or to report **Subcontractor** payments in a timely fashion may result in the **Commissioner** declaring the **Contractor** in default of the **Contract** and will subject **Contractor** to liquidated damages in the amount of \$100 per day for each day that the **Contractor** fails to identify a **Subcontractor** along with the required information about the **Subcontractor** and/or fails to report payments to a **Subcontractor**, beyond the time frames set forth herein or in the notice from the **City**. Article 15 shall govern the issue of liquidated damages.

17.4 If an approved **Subcontractor** elects to subcontract any portion of its subcontract, the proposed sub-subcontract shall be submitted in the same manner as directed above.

17.5 The **Commissioner** will notify the **Contractor** in writing whether the proposed **Subcontractor** is approved. If the proposed **Subcontractor** is not approved, the **Contractor** may submit another proposed **Subcontractor** unless the **Contractor** decides to do the **Work**. No **Subcontractor** shall be permitted to enter or perform any work on the **Site** unless approved.

17.6 Before entering into any subcontract hereunder, the **Contractor** shall provide the proposed **Subcontractor** with a complete copy of this document and inform the proposed **Subcontractor** fully and completely of all provisions and requirements of this **Contract** relating either directly or indirectly to the **Work** to be performed and the materials to be furnished under such subcontract, and every such **Subcontractor** shall expressly stipulate that all labor performed and materials furnished by the **Subcontractor** shall strictly comply with the requirements of this **Contract**.

17.7 Documents given to a prospective **Subcontractor** for the purpose of soliciting the **Subcontractor's** bid shall include either a copy of the bid cover or a separate information sheet setting forth the **Project** name, the **Contract** number (if available), the **Agency** (as noted in Article 2.1.6), and the **Project's** location.

17.8 The **Commissioner's** approval of a **Subcontractor** shall not relieve the **Contractor** of any of its responsibilities, duties, and liabilities hereunder. The **Contractor** shall be solely responsible to the **City** for the acts or defaults of its **Subcontractor** and of such **Subcontractor's** officers, agents, and employees, each of whom shall, for this purpose, be deemed to be the agent or employee of the **Contractor** to the extent of its subcontract.

17.9 If the **Subcontractor** fails to maintain the necessary facilities, skill, integrity, past experience, and financial resources (other than due to the **Contractor's** failure to make payments where required) to perform the **Work** in accordance with the terms and conditions of this **Contract**, the **Contractor** shall promptly notify the **Commissioner** and replace such **Subcontractor** with a newly approved **Subcontractor** in accordance with this Article 17.

17.10 The **Contractor** shall be responsible for ensuring that all **Subcontractors** performing **Work** at the **Site** maintain all insurance required by **Law**.

17.11 The **Contractor** shall promptly, upon request, file with the **Engineer** a conformed copy of the subcontract and its cost. The subcontract shall provide the following:

17.11.1 Payment to **Subcontractors**: The agreement between the **Contractor** and its **Subcontractor** shall contain the same terms and conditions as to method of payment for **Work**, labor, and materials, and as to retained percentages, as are contained in this **Contract**.

17.11.2 Prevailing Rate of Wages: The agreement between the **Contractor** and its **Subcontractor** shall include the prevailing wage rates and supplemental benefits to be paid in accordance with Labor Law Section 220.

17.11.3 Section 6-123 of the Administrative Code: Pursuant to the requirements of Section 6-123 of the Administrative Code, every agreement between the **Contractor** and a **Subcontractor** in excess of fifty thousand (\$50,000) dollars shall include a provision that the **Subcontractor** shall not engage in any unlawful discriminatory practice as defined in Title VIII of the Administrative Code (Section 8-101 *et seq.*).

17.11.4 All requirements required pursuant to federal and/or state grant agreement(s), if applicable to the **Work**.

17.12 The **Commissioner** may deduct from the amounts certified under this **Contract** to be due to the **Contractor**, the sum or sums due and owing from the **Contractor** to the **Subcontractors** according to the terms of the said subcontracts, and in case of dispute between the **Contractor** and its **Subcontractor**, or **Subcontractors**, as to the amount due and owing, the **Commissioner** may deduct and withhold from the amounts certified under this **Contract** to be due to the **Contractor** such sum or sums as may be claimed by such **Subcontractor**, or **Subcontractors**, in a sworn affidavit, to be due and owing until such time as such claim or claims shall have been finally resolved.

17.13 On contracts where performance bonds and payment bonds are executed, the **Contractor** shall include on each requisition for payment the following data: **Subcontractor's** name, value of the subcontract, total amount previously paid to **Subcontractor** for **Work** previously requisitioned, and the amount, including retainage, to be paid to the **Subcontractor** for **Work** included in the requisition.

17.14 On **Contracts** where performance bonds and payment bonds are not executed, the **Contractor** shall include with each requisition for payment submitted hereunder, a signed statement from each and every **Subcontractor** and/or **Materialman** for whom payment is requested in such requisition. Such signed statement shall be on the letterhead of the **Subcontractor** and/or **Materialman** for whom payment is requested and shall (i) verify that such **Subcontractor** and/or **Materialman** has been paid in full for all **Work** performed and/or material supplied to date, exclusive of any amount retained and any amount included on the current requisition, and (ii) state the total amount of retainage to date, exclusive of any amount retained on the current requisition.

ARTICLE 18. ASSIGNMENTS

18.1 The **Contractor** shall not assign, transfer, convey or otherwise dispose of this **Contract**, or the right to execute it, or the right, title or interest in or to it or any part thereof, or assign, by power of attorney or otherwise any of the monies due or to become due under this **Contract**, unless the previous written consent of the **Commissioner** shall first be obtained thereto, and the giving of any such consent to a particular assignment shall not dispense with the necessity of such consent to any further or other assignments.

18.2 Such assignment, transfer, conveyance or other disposition of this **Contract** shall not be valid until filed in the office of the **Commissioner** and the **Comptroller**, with the written consent of the **Commissioner** endorsed thereon or attached thereto.

18.3 Failure to obtain the previous written consent of the **Commissioner** to such an assignment,

transfer, conveyance or other disposition, may result in the revocation and annulment of this **Contract**. The **City** shall thereupon be relieved and discharged from any further liability to the **Contractor**, its assignees, transferees or sublessees, who shall forfeit and lose all monies therefor earned under the **Contract**, except so much as may be required to pay the **Contractor's** employees.

18.4 The provisions of this clause shall not hinder, prevent, or affect an assignment by the **Contractor** for the benefit of its creditors made pursuant to the **Laws** of the State of New York.

18.5 This **Contract** may be assigned by the **City** to any corporation, agency or instrumentality having authority to accept such assignment.

CHAPTER V: CONTRACTOR'S SECURITY AND GUARANTEE

ARTICLE 19. SECURITY DEPOSIT

19.1 If performance and payment bonds are required, the **City** shall retain the bid security to ensure that the successful bidder executes the **Contract** and furnishes the required payment and performance security within ten (10) **Days** after notice of the award of the **Contract**. If the successful bidder fails to execute the **Contract** and furnish the required payment and performance security, the **City** shall retain such bid security as set forth in the Information for Bidders. If the successful bidder executes the **Contract** and furnishes the required payment and performance security, the **City** shall return the bid security within a reasonable time after the furnishing of such bonds and execution of the **Contract** by the **City**.

19.2 If performance and payment bonds are not required, the bid security shall be retained by the **City** as security for the **Contractor's** faithful performance of the **Contract**. If partial payments are provided, the bid security will be returned to the **Contractor** after the sum retained under Article 21 equals the amount of the bid security, subject to other provisions of this **Contract**. If partial payments are not provided, the bid security will be released when final payment is certified by the **City** for payment.

19.3 If the **Contractor** is declared in default under Article 48 prior to the return of the deposit, or if any claim is made such as referred to in Article 23, the amount of such deposit, or so much thereof as the **Comptroller** may deem necessary, may be retained and then applied by the **Comptroller**:

19.3.1 To compensate the **City** for any expense, loss or damage suffered or incurred by reason of or resulting from such default, including the cost of re-letting and liquidated damages; or

19.3.2 To indemnify the **City** against any and all claims.

ARTICLE 20. PAYMENT GUARANTEE

20.1 On **Contracts** where one hundred (100%) percent performance bonds and payment bonds are executed, this Article 20 does not apply.

20.2 In the event the terms of this **Contract** do not require the **Contractor** to provide a payment bond or where the **Contract** does not require a payment bond for one hundred (100%) percent of the **Contract** price, the **City** shall, in accordance with the terms of this Article 20, guarantee payment of all lawful claims for:

20.2.1 Wages and compensation for labor performed and/or services rendered; and

20.2.2 Materials, equipment, and supplies provided, whether incorporated into the **Work** or not, when demands have been filed with the **City** as provided hereinafter by any person, firm, or corporation which furnished labor, material, equipment, supplies, or any combination thereof, in connection with the **Work** performed hereunder (hereinafter referred to as the “beneficiary”) at the direction of the **City** or the **Contractor**.

20.3 The provisions of Article 20.2 are subject to the following limitations and conditions:

20.3.1 If the **Contractor** provides a payment bond for a value that is less than one hundred (100%) percent of the value of the **Contract Work**, the payment bond provided by the **Contractor** shall be primary (and non-contributing) to the payment guarantee provided under this Article 20.

20.3.2 The guarantee is made for the benefit of all beneficiaries as defined in Article 20.2 provided that those beneficiaries strictly adhere to the terms and conditions of Article 20.3.4 and 20.3.5.

20.3.3 Nothing in this Article 20 shall prevent a beneficiary providing labor, services or material for the **Work** from suing the **Contractor** for any amounts due and owing the beneficiary by the **Contractor**.

20.3.4 Every person who has furnished labor or material, to the **Contractor** or to a **Subcontractor** of the **Contractor**, in the prosecution of the **Work** and who has not been paid in full therefor before the expiration of a period of ninety (90) **Days** after the date on which the last of the labor was performed or material was furnished by him/her for which the claim is made, shall have the right to sue on this payment guarantee in his/her own name for the amount, or the balance thereof, unpaid at the time of commencement of the action; provided, however, that a person having a direct contractual relationship with a **Subcontractor** of the **Contractor** but no contractual relationship express or implied with the **Contractor** shall not have a right of action upon the guarantee unless he/she shall have given written notice to the **Contractor** within one hundred twenty (120) **Days** from the date on which the last of the labor was performed or the last of the material was furnished, for which his/her claim is made, stating with substantial accuracy the amount claimed and the name of the party to whom the material was furnished or for whom the labor was performed. The notice shall be served by delivering the same personally to the **Contractor** or by mailing the same by registered mail, postage prepaid, in an envelope addressed to the **Contractor** at any place where it maintains an office or conducts its business; provided, however, that where such notice is actually received by the **Contractor** by other means, such notice shall be deemed sufficient.

20.3.5 Except as provided in Labor Law Section 220-g, no action on this payment guarantee shall be commenced after the expiration of the one-year limitations period set forth in Section 137(4)(b) of the State Finance Law.

20.3.6 The **Contractor** shall promptly forward to the **City** any notice or demand received pursuant to Article 20.3.4. The **Contractor** shall inform the **City** of any defenses to the notice or demand and shall forward to the **City** any documents the **City** requests concerning the notice or demand.

20.3.7 All demands made against the **City** by a beneficiary of this payment guarantee shall be presented to the **Engineer** along with all written documentation concerning the demand which the **Engineer** deems reasonably appropriate or necessary, which may include, but shall not be

limited to: the subcontract; any invoices presented to the **Contractor** for payment; the notarized statement of the beneficiary that the demand is due and payable, that a request for payment has been made of the **Contractor** and that the demand has not been paid by the **Contractor** within the time allowed for such payment by the subcontract; and copies of any correspondence between the beneficiary and the **Contractor** concerning such demand. The **City** shall notify the **Contractor** that a demand has been made. The **Contractor** shall inform the **City** of any defenses to the demand and shall forward to the **City** any documents the **City** requests concerning the demand.

20.3.8 The **City** shall make payment only if, after considering all defenses presented by the **Contractor**, it determines that the payment is due and owing to the beneficiary making the demand.

20.3.9 No beneficiary shall be entitled to interest from the **City**, or to any other costs, including, but not limited to, attorneys' fees, except to the extent required by State Finance Law Section 137.

20.3.10

20.4 Upon the receipt by the **City** of a demand pursuant to this Article 20, the **City** may withhold from any payment otherwise due and owing to the **Contractor** under this **Contract** an amount sufficient to satisfy the demand.

20.4.1 In the event the **City** determines that the demand is valid, the **City** shall notify the **Contractor** of such determination and the amount thereof and direct the **Contractor** to immediately pay such amount to the beneficiary. In the event the **Contractor**, within seven (7) **Days** of receipt of such notification from the **City**, fails to pay the beneficiary, such failure shall constitute an automatic and irrevocable assignment of payment by the **Contractor** to the beneficiary for the amount of the demand determined by the **City** to be valid. The **Contractor**, without further notification or other process, hereby gives its unconditional consent to such assignment of payment to the beneficiary and authorizes the **City**, on its behalf, to take all necessary actions to implement such assignment of payment, including without limitation the execution of any instrument or documentation necessary to effectuate such assignment.

20.4.2 In the event that the amount otherwise due and owing to the **Contractor** by the **City** is insufficient to satisfy such demand, the **City** may, at its option, require payment from the **Contractor** of an amount sufficient to cover such demand and exercise any other right to require or recover payment which the **City** may have under **Law** or **Contract**.

20.4.3 In the event the **City** determines that the demand is invalid, any amount withheld pending the **City**'s review of such demand shall be paid to the **Contractor**; provided, however, no lien has been filed. In the event a claim or an action has been filed, the terms and conditions set forth in Article 23 shall apply. In the event a lien has been filed, the parties will be governed by the provisions of the Lien Law of the State of New York.

20.5 The provisions of this Article 20 shall not prevent the **City** and the **Contractor** from resolving disputes in accordance with the **PPB** Rules, where applicable.

20.6 In the event the **City** determines that the beneficiary is entitled to payment pursuant to this Article 20, such determination and any defenses and counterclaims raised by the **Contractor** shall be taken into account in evaluating the **Contractor**'s performance.

20.7 Nothing in this Article 20 shall relieve the **Contractor** of the obligation to pay the claims of all

persons with valid and lawful claims against the **Contractor** relating to the **Work**.

20.8 The **Contractor** shall not require any performance, payment or other bonds of any **Subcontractor** if this **Contract** does not require such bonds of the **Contractor**.

20.9 The payment guarantee made pursuant to this Article 20 shall be construed in a manner consistent with Section 137 of the State Finance Law and shall afford to persons furnishing labor or materials to the **Contractor** or its **Subcontractors** in the prosecution of the **Work** under this **Contract** all of the rights and remedies afforded to such persons by such section, including but not limited to, the right to commence an action against the **City** on the payment guarantee provided by this Article 20 within the one-year limitations period set forth in Section 137(4)(b).

ARTICLE 21. RETAINED PERCENTAGE

21.1 If this **Contract** requires one hundred (100%) percent performance and payment security, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.2 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded does not exceed one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.3 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded exceeds one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, up to ten (10%) percent of the value of **Work** certified for payment in each partial payment voucher. The percentage to be retained is set forth in Schedule A of the General Conditions.

ARTICLE 22. INSURANCE

22.1 Types of Insurance: The **Contractor** shall procure and maintain the following types of insurance if, and as indicated, in Schedule A of the General Conditions (with the minimum limits and special conditions specified in Schedule A). Such insurance shall be maintained from the date the **Contractor** is required to provide Proof of Insurance pursuant to Article 22.3.1 through the date of completion of all required **Work** (including punch list work as certified in writing by the **Resident Engineer**), except for insurance required pursuant to Article 22.1.4, which may terminate upon **Substantial Completion** of the **Contract**. All insurance shall meet the requirements set forth in this Article 22. Wherever this Article requires that insurance coverage be “at least as broad” as a specified form (including all ISO forms), there is no obligation that the form itself be used, provided that the **Contractor** can demonstrate that the alternative form or endorsement contained in its policy provides coverage at least as broad as the specified form.

22.1.1 Commercial General Liability Insurance: The **Contractor** shall provide Commercial General Liability Insurance covering claims for property damage and/or bodily injury, including death, which may arise from any of the operations under this **Contract**. Coverage under this insurance shall be at least as broad as that provided by the latest edition of Insurance

Services Office (“ISO”) Form CG 0001. Such insurance shall be “occurrence” based rather than “claims-made” and include, without limitation, the following types of coverage: premises operations; products and completed operations; contractual liability (including the tort liability of another assumed in a contract); broad form property damage; independent contractors; explosion, collapse and underground (XCU); construction means and methods; and incidental malpractice. Such insurance shall contain a “per project” aggregate limit, as specified in Schedule A, that applies separately to operations under this **Contract**.

22.1.1(a) Such Commercial General Liability Insurance shall name the **City** as an Additional Insured. Coverage for the City shall specifically include the **City’s** officials and employees, be at least as broad as the latest edition of ISO Form CG 20 10 and provide completed operations coverage at least as broad as the latest edition of ISO Form CG 20 37.

22.1.1(b) Such Commercial General Liability Insurance shall name all other entities designated as additional insureds in Schedule A but only for claims arising from the **Contractor’s** operations under this **Contract**, with coverage at least as broad as the latest edition of ISO Form CG 20 26.

22.1.1(c) If the **Work** requires a permit from the Department of Buildings pursuant to 1 RCNY Section 101-08, the **Contractor** shall provide Commercial General Liability Insurance with limits of at least those required by 1 RCNY section 101-08 or greater limits required by the Agency in accordance with Schedule A. If the **Work** does not require such a permit, the minimum limits shall be those provided for in Schedule A.

22.1.1(d) If any of the **Work** includes repair of a waterborne vessel owned by or to be delivered to the **City**, such Commercial General Liability shall include, or be endorsed to include, Ship Repairer’s Legal Liability Coverage to protect against, without limitation, liability arising from navigation of such vessels prior to delivery to and acceptance by the **City**.

22.1.2 Workers’ Compensation Insurance, Employers’ Liability Insurance, and Disability Benefits Insurance: The **Contractor** shall provide, and shall cause its **Subcontractors** to provide, Workers Compensation Insurance, Employers’ Liability Insurance, and Disability Benefits Insurance in accordance with the **Laws** of the State of New York on behalf of all employees providing services under this **Contract** (except for those employees, if any, for which the **Laws** require insurance only pursuant to Article 22.1.3).

22.1.3 United States Longshoremen’s and Harbor Workers Act and/or Jones Act Insurance: If specified in Schedule A of the General Conditions or if required by **Law**, the **Contractor** shall provide insurance in accordance with the United States Longshoremen’s and Harbor Workers Act and/or the Jones Act, on behalf of all qualifying employees providing services under this **Contract**.

22.1.4 Builders Risk Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall provide Builders Risk Insurance on a completed value form for the total value of the **Work** through **Substantial Completion** of the **Work** in its entirety. Such insurance shall be provided on an All Risk basis and include coverage, without limitation, for windstorm (including named windstorm), storm surge, flood and earth movement. Unless waived by the **Commissioner**, it shall include coverage for ordinance and law, demolition and increased costs of construction, debris removal, pollutant clean up and removal, and expediting costs. Such insurance shall cover, without limitation, (a) all buildings and/or structures involved in the

Work, as well as temporary structures at the **Site**, and (b) any property that is intended to become a permanent part of such building or structure, whether such property is on the **Site**, in transit or in temporary storage. Policies shall name the **Contractor** as Named Insured and list the **City** as both an Additional Insured and a Loss Payee as its interest may appear.

22.1.4(a) Policies of such insurance shall specify that, in the event a loss occurs at an occupied facility, occupancy of such facility is permitted without the consent of the issuing insurance company.

22.1.4(b) Such insurance may be provided through an Installation Floater, at the **Contractor's** option, if it otherwise conforms with the requirements of this Article 22.1.4.

22.1.5 Commercial Automobile Liability Insurance: The **Contractor** shall provide Commercial Automobile Liability Insurance for liability arising out of ownership, maintenance or use of any owned (if any), non-owned and hired vehicles to be used in connection with this **Contract**. Coverage shall be at least as broad as the latest edition of ISO Form CA0001. If vehicles are used for transporting hazardous materials, the Automobile Liability Insurance shall be endorsed to provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90.

22.1.6 Contractors Pollution Liability Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Contractors Pollution Liability Insurance covering bodily injury and property damage. Such insurance shall provide coverage for actual, alleged or threatened emission, discharge, dispersal, seepage, release or escape of pollutants (including asbestos), including any loss, cost or expense incurred as a result of any cleanup of pollutants (including asbestos) or in the investigation, settlement or defense of any claim, action, or proceedings arising from the operations under this **Contract**. Such insurance shall be in the **Contractor's** name and list the **City** as an Additional Insured and any other entity specified in Schedule A. Coverage shall include, without limitation, (a) loss of use of damaged property or of property that has not been physically injured, (b) transportation, and (c) non-owned disposal sites.

22.1.6(a) Coverage for the **City** as Additional Insured shall specifically include the **City's** officials and employees and be at least as broad as provided to the **Contractor** for this **Project**.

22.1.6(b) If such insurance is written on a claims-made policy, such policy shall have a retroactive date on or before the effective date of this **Contract**, and continuous coverage shall be maintained, or an extended discovery period exercised, for a period of not less than three (3) years from the time the **Work** under this **Contract** is completed.

22.1.7 Marine Insurance:

22.1.7(a) Marine Protection and Indemnity Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Marine Protection and Indemnity Insurance with coverage at least as broad as Form SP-23. The insurance shall provide coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured for bodily injury and property damage arising from marine operations under this

Contract. Coverage shall include, without limitation, injury or death of crew members (if not fully provided through other insurance), removal of wreck, damage to piers, wharves and other fixed or floating objects and loss of or damage to any other vessel or craft, or to property on such other vessel or craft.

22.1.7(b) Hull and Machinery Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Hull and Machinery Insurance with coverage for the **Contractor** or **Subcontractor** (whichever is doing this Work) and for the **City** (together with its officials and employees) as Additional Insured at least as broad as the latest edition of American Institute Tug Form for all tugs used under this **Contract** and Collision Liability at least as broad as the latest edition of American Institute Hull Clauses.

22.1.7(c) Marine Pollution Liability Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such Work to maintain, Marine Pollution Liability Insurance covering itself (or the Subcontractor doing such Work) as Named Insured and the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured. Coverage shall be at least as broad as that provided by the latest edition of Water Quality Insurance Syndicate Form and include, without limitation, liability arising from the discharge or substantial threat of a discharge of oil, or from the release or threatened release of a hazardous substance including injury to, or economic losses resulting from, the destruction of or damage to real property, personal property or natural resources.

22.1.8 The **Contractor** shall provide such other types of insurance, at such minimum limits and with such conditions, as are specified in Schedule A of the General Conditions.

22.2 General Requirements for Insurance Coverage and Policies:

22.2.1 All required insurance policies shall be maintained with companies that may lawfully issue the required policy and have an A.M. Best rating of at least A-/VII or a Standard and Poor's rating of at least A, unless prior written approval is obtained from the **City** Corporation Counsel.

22.2.2 The **Contractor** shall be solely responsible for the payment of all premiums for all required policies and all deductibles and self-insured retentions to which such policies are subject, whether or not the **City** is an insured under the policy.

22.2.3 In his/her sole discretion, the **Commissioner** may, subject to the approval of the **Comptroller** and the **City** Corporation Counsel, accept Letters of Credit and/or custodial accounts in lieu of required insurance.

22.2.4 The **City's** limits of coverage for all types of insurance required pursuant to Schedule A of the General Conditions shall be the greater of (i) the minimum limits set forth in Schedule A or (ii) the limits provided to the **Contractor** as Named Insured under all primary, excess, and umbrella policies of that type of coverage.

22.2.5 The **Contractor** may satisfy its insurance obligations under this Article 22 through primary policies or a combination of primary and excess/umbrella policies, so long as all policies provide the scope of coverage required herein.

22.2.6 Policies of insurance provided pursuant to this Article 22 shall be primary and non-contributing to any insurance or self-insurance maintained by the **City**.

22.3 Proof of Insurance:

22.3.1 For all types of insurance required by Article 22.1 and Schedule A, except for insurance required by Articles 22.1.4 and 22.1.7, the **Contractor** shall file proof of insurance in accordance with this Article 22.3 within ten (10) **Days** of award. For insurance provided pursuant to Articles 22.1.4 and 22.1.7, proof shall be filed by a date specified by the **Commissioner** or ten (10) **Days** prior to the commencement of the portion of the **Work** covered by such policy, whichever is earlier.

22.3.2 For Workers' Compensation Insurance provided pursuant to Article 22.1.2, the **Contractor** shall submit one of the following forms: C-105.2 Certificate of Workers' Compensation Insurance; U-26.3 - State Insurance Fund Certificate of Workers' Compensation Insurance; Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. For Disability Benefits Insurance provided pursuant to Article 22.1.2, the Contractor shall submit DB-120.1 - Certificate Of Insurance Coverage Under The NYS Disability Benefits Law, Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. ACORD forms are not acceptable.

22.3.3 For policies provided pursuant to all of Article 22.1 other than Article 22.1.2, the **Contractor** shall submit one or more Certificates of Insurance on forms acceptable to the **Commissioner**. All such Certificates of Insurance shall certify (a) the issuance and effectiveness of such policies of insurance, each with the specified minimum limits (b) for insurance secured pursuant to Article 22.1.1 that the **City** and any other entity specified in Schedule A is an Additional Insured thereunder; (c) in the event insurance is required pursuant to Article 22.1.6 and/or Article 22.1.7, that the City is an Additional Insured thereunder; (d) the company code issued to the insurance company by the National Association of Insurance Commissioners (the NAIC number); and (e) the number assigned to the **Contract** by the **City**. All such Certificates of Insurance shall be accompanied by either a duly executed "Certification by Insurance Broker or Agent" in the form contained in Part III of Schedule A or copies of all policies referenced in such Certificate of Insurance as certified by an authorized representative of the issuing insurance carrier. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

22.3.4 Documentation confirming renewals of insurance shall be submitted to the **Commissioner** prior to the expiration date of coverage of policies required under this **Contract**. Such proofs of insurance shall comply with the requirements of Articles 22.3.2 and 22.3.3.

22.3.5 The **Contractor** shall be obligated to provide the **City** with a copy of any policy of insurance provided pursuant to this Article 22 upon the demand for such policy by the **Commissioner** or the **City** Corporation Counsel.

22.4 Operations of the **Contractor**:

22.4.1 The **Contractor** shall not commence the **Work** unless and until all required certificates have been submitted to and accepted by the **Commissioner**. Acceptance by the

Commissioner of a certificate does not excuse the **Contractor** from securing insurance consistent with all provisions of this Article 22 or of any liability arising from its failure to do so.

22.4.2 The **Contractor** shall be responsible for providing continuous insurance coverage in the manner, form, and limits required by this **Contract** and shall be authorized to perform **Work** only during the effective period of all required coverage.

22.4.3 In the event that any of the required insurance policies lapse, are revoked, suspended or otherwise terminated, for whatever cause, the **Contractor** shall immediately stop all **Work**, and shall not recommence **Work** until authorized in writing to do so by the **Commissioner**. Upon quitting the **Site**, except as otherwise directed by the **Commissioner**, the **Contractor** shall leave all plant, materials, equipment, tools, and supplies on the **Site**. **Contract** time shall continue to run during such periods and no extensions of time will be granted. The **Commissioner** may also declare the **Contractor** in default for failure to maintain required insurance.

22.4.4 In the event the **Contractor** receives notice, from an insurance company or other person, that any insurance policy required under this Article 22 shall be cancelled or terminated (or has been cancelled or terminated) for any reason, the **Contractor** shall immediately forward a copy of such notice to both the **Commissioner** and the New York City Comptroller, attn: Office of Contract Administration, Municipal Building, One Centre Street, room 1005, New York, New York 10007. Notwithstanding the foregoing, the **Contractor** shall ensure that there is no interruption in any of the insurance coverage required under this Article 22.

22.4.5 Where notice of loss, damage, occurrence, accident, claim or suit is required under an insurance policy maintained in accordance with this Article 22, the **Contractor** shall notify in writing all insurance carriers that issued potentially responsive policies of any such event relating to any operations under this **Contract** (including notice to Commercial General Liability insurance carriers for events relating to the **Contractor**'s own employees) no later than 20 days after such event. For any policy where the **City** is an Additional Insured, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Insured as well as the Named Insured." Such notice shall also contain the following information: the number of the insurance policy, the name of the named insured, the date and location of the damage, occurrence, or accident, and the identity of the persons or things injured, damaged or lost. The **Contractor** shall simultaneously send a copy of such notice to the City of New York c/o Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

22.4.6 In the event of any loss, accident, claim, action, or other event that does or can give rise to a claim under any insurance policy required under this Article 22, the **Contractor** shall at all times fully cooperate with the **City** with regard to such potential or actual claim.

22.5 **Subcontractor Insurance:** In the event the **Contractor** requires any **Subcontractor** to procure insurance with regard to any operations under this **Contract** and requires such **Subcontractor** to name the **Contractor** as an **Additional Insured** thereunder, the **Contractor** shall ensure that the **Subcontractor** name the **City**, including its officials and employees, as an Additional Insured with coverage at least as broad as the most recent edition of ISO Form CG 20 26.

22.6 Wherever reference is made in Article 7 or this Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth in Schedule A of the General Conditions. In the event no address is set forth in Schedule A, such documents

are to be sent to the **Commissioner's** address as provided elsewhere in this **Contract**.

22.7 Apart from damages or losses covered by insurance provided pursuant to Articles 22.1.2, 22.1.3, or 22.1.5, the **Contractor** waives all rights against the **City**, including its officials and employees, for any damages or losses that are covered under any insurance required under this Article 22 (whether or not such insurance is actually procured or claims are paid thereunder) or any other insurance applicable to the operations of the **Contractor** and/or its employees, agents, or **Subcontractors**.

22.8 In the event the **Contractor** utilizes a self-insurance program to satisfy any of the requirements of this Article 22, the **Contractor** shall ensure that any such self-insurance program provides the **City** with all rights that would be provided by traditional insurance under this Article 22, including but not limited to the defense and indemnification obligations that insurers are required to undertake in liability policies.

22.9 Materiality/Non-Waiver: The **Contractor's** failure to secure policies in complete conformity with this Article 22, or to give an insurance company timely notice of any sort required in this **Contract** or to do anything else required by this Article 22 shall constitute a material breach of this **Contract**. Such breach shall not be waived or otherwise excused by any action or inaction by the **City** at any time.

22.10 Pursuant to General Municipal Law Section 108, this **Contract** shall be void and of no effect unless **Contractor** maintains Workers' Compensation Insurance for the term of this **Contract** to the extent required and in compliance with the New York State Workers' Compensation Law.

22.11 Other Remedies: Insurance coverage provided pursuant to this Article 22 or otherwise shall not relieve the **Contractor** of any liability under this **Contract**, nor shall it preclude the **City** from exercising any rights or taking such other actions available to it under any other provisions of this **Contract** or **Law**.

ARTICLE 23. MONEY RETAINED AGAINST CLAIMS

23.1 If any claim shall be made by any person or entity (including **Other Contractors** with the **City** on this **Project**) against the **City** or against the **Contractor** and the **City** for any of the following:

- (a) An alleged loss, damage, injury, theft or vandalism of any of the kinds referred to in Articles 7 and 12, plus the reasonable costs of defending the **City**, which in the opinion of the **Comptroller** may not be paid by an insurance company (for any reason whatsoever); or
- (b) An infringement of copyrights, patents or use of patented articles, tools, etc., as referred to in Article 57; or
- (c) Damage claimed to have been caused directly or indirectly by the failure of the **Contractor** to perform the **Work** in strict accordance with this **Contract**,

the amount of such claim, or so much thereof as the **Comptroller** may deem necessary, may be withheld by the **Comptroller**, as security against such claim, from any money due hereunder. The **Comptroller**, in his/her discretion, may permit the **Contractor** to substitute other satisfactory security in lieu of the monies so withheld.

23.2 If an action on such claim is timely commenced and the liability of the **City**, or the **Contractor**,

or both, shall have been established therein by a final judgment of a court of competent jurisdiction, or if such claim shall have been admitted by the **Contractor** to be valid, the **Comptroller** shall pay such judgment or admitted claim out of the monies retained by the **Comptroller** under the provisions of this Article 23, and return the balance, if any, without interest, to the **Contractor**.

ARTICLE 24. MAINTENANCE AND GUARANTY

24.1 The **Contractor** shall promptly repair, replace, restore or rebuild, as the **Commissioner** may determine, any finished **Work** in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of **Substantial Completion** (or use and occupancy in accordance with Article 16), except where other periods of maintenance and guaranty are provided for in Schedule A.

24.2 As security for the faithful performance of its obligations hereunder, the **Contractor**, upon filing its requisition for payment on **Substantial Completion**, shall deposit with the **Commissioner** a sum equal to one (1%) percent of the price (or the amount fixed in Schedule A of the General Conditions) in cash or certified check upon a state or national bank and trust company or a check of such bank and trust company signed by a duly authorized officer thereof and drawn to the order of the **Comptroller**, or obligations of the **City**, which the **Comptroller** may approve as of equal value with the sum so required.

24.3 In lieu of the above, the **Contractor** may make such security payment to the **City** by authorizing the **Commissioner** in writing to deduct the amount from the **Substantial Completion** payment which shall be deemed the deposit required above.

24.4 If the **Contractor** has faithfully performed all of its obligations hereunder the **Commissioner** shall so certify to the **Comptroller** within five (5) **Days** after the expiration of one (1) year from the date of **Substantial Completion** and acceptance of the **Work** or within thirty (30) **Days** after the expiration of the guarantee period fixed in the **Specifications**. The security payment shall be repaid to the **Contractor** without interest within thirty (30) **Days** after certification by the **Commissioner** to the **Comptroller** that the **Contractor** has faithfully performed all of its obligations hereunder.

24.5 Notice by the **Commissioner** to the **Contractor** to repair, replace, rebuild or restore such defective or damaged **Work** shall be timely, pursuant to this article, if given not later than ten (10) **Days** subsequent to the expiration of the one (1) year period or other periods provided for herein.

24.6 If the **Contractor** shall fail to repair, replace, rebuild or restore such defective or damaged **Work** promptly after receiving such notice, the **Commissioner** shall have the right to have the **Work** done by others in the same manner as provided for in the completion of a defaulted **Contract**, under Article 51.

24.7 If the security payment so deposited is insufficient to cover the cost of such **Work**, the **Contractor** shall be liable to pay such deficiency on demand by the **Commissioner**.

24.8 The **Engineer's** certificate setting forth the fair and reasonable cost of repairing, replacing, rebuilding or restoring any damaged or defective **Work** when performed by one other than the **Contractor**, shall be binding and conclusive upon the **Contractor** as to the amount thereof.

24.9 The **Contractor** shall obtain all manufacturers' warranties and guaranties of all equipment and materials required by this **Contract** in the name of the **City** and shall deliver same to the **Commissioner**. All of the **City's** rights and title and interest in and to said manufacturers' warranties and guaranties may be assigned by the **City** to any subsequent purchasers of such equipment and materials or lessees of the

premises into which the equipment and materials have been installed.

CHAPTER VI: CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM

ARTICLE 25. CHANGES

25.1 Changes may be made to this **Contract** only as duly authorized in writing by the **Commissioner** in accordance with the **Law** and this **Contract**. All such changes, modifications, and amendments will become a part of the **Contract**. **Work** so ordered shall be performed by the **Contractor**.

25.2 **Contract** changes will be made only for **Work** necessary to complete the **Work** included in the original scope of the **Contract** and/or for non-material changes to the scope of the **Contract**. Changes are not permitted for any material alteration in the scope of **Work** in the **Contract**.

25.3 The **Contractor** shall be entitled to a price adjustment for **Extra Work** performed pursuant to a written change order. Adjustments to price shall be computed in one or more of the following ways:

25.3.1 By applicable unit prices specified in the **Contract**; and/or

25.3.2 By agreement of a fixed price; and/or

25.3.3 By time and material records; and/or

25.3.4 In any other manner approved by the **CCPO**.

25.4 All payments for change orders are subject to pre-audit by the **Engineering Audit Officer** and may be post-audited by the **Comptroller** and/or the **Agency**.

ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK

26.1 **Overrun of Unit Price Item**: An overrun is any quantity of a unit price item which the **Contractor** is directed to provide which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule.

26.1.1 For any unit price item, the **Contractor** will be paid at the unit price bid for any quantity up to one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule. If during the progress of the **Work**, the actual quantity of any unit price item required to complete the **Work** approaches the estimated quantity for that item, and for any reason it appears that the actual quantity of any unit price item necessary to complete the **Work** will exceed the estimated quantity for that item by twenty-five (25%) percent, the **Contractor** shall immediately notify the **Engineer** of such anticipated overrun. The **Contractor** shall not be compensated for any quantity of a unit price item provided which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule without written authorization from the **Engineer**.

26.1.2 If the actual quantity of any unit price item necessary to complete the **Work** will exceed one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule, the **City** reserves the right and the **Contractor** agrees to negotiate a new unit price for such item. In no event shall such negotiated new unit price exceed the unit bid price. If the **City** and **Contractor** cannot agree on a new unit price, then the **City** shall order the **Contractor** and the **Contractor** agrees to provide additional quantities of the item on the

basis of time and material records for the actual and reasonable cost as determined under Article 26.2, but in no event at a unit price exceeding the unit price bid.

26.2 **Extra Work:** For **Extra Work** where payment is by agreement on a fixed price in accordance with Article 25.3.2, the price to be paid for such **Extra Work** shall be based on the fair and reasonable estimated cost of the items set forth below. For **Extra Work** where payment is based on time and material records in accordance with Article 25.3.3, the price to be paid for such **Extra Work** shall be the actual and reasonable cost of the items set forth below, calculated in accordance with the formula specified therein, if any.

26.2.1 Necessary materials (including transportation to the **Site**); plus

26.2.2 Necessary direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits; plus

26.2.3 Sales and personal property taxes, if any, required to be paid on materials not incorporated into such **Extra Work**; plus

26.2.4 Reasonable rental value of **Contractor**-owned (or **Subcontractor**-owned, as applicable), necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per operating hour: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. Reasonable rental value is defined as the lower of either seventy-five percent of the monthly prorated rental rates established in "The AED Green Book, Rental Rates and Specifications for Construction Equipment" published by Equipment Watch (the "Green Book"), or seventy-five percent of the monthly prorated rental rates established in the "Rental Rate Blue Book for Construction Equipment" published by Equipment Watch (the "Blue Book") (the applicable Blue Book rate being for rental only without the addition of any operational costs listed in the Blue Book). The reasonable rental value is deemed to be inclusive of all operating costs except for fuel/energy consumption and equipment operator's wages/costs. For multiple shift utilization, reimbursement shall be calculated as follows: first shift shall be seventy-five (75%) percent of such rental rates; second shift shall be sixty (60%) percent of the first shift rate; and third shift shall be forty (40%) percent of the first shift rate. Equipment on standby shall be reimbursed at one-third (1/3) the prorated monthly rental rate. **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment includes equipment from rental companies affiliated with or controlled by the **Contractor** (or **Subcontractor**, as applicable), as determined by the **Commissioner**. In establishing cost reimbursement for non-operating **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment (scaffolding, sheeting systems, road plates, etc.), the **City** may restrict reimbursement to a purchase-salvage/life cycle basis if less than the computed rental costs; plus

26.2.5 Necessary installation and dismantling of such plant and equipment, including transportation to and from the **Site**, if any, provided that, in the case of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) equipment rented from a third party, the cost of installation and dismantling are not allowable if such costs are included in the rental rate; plus

26.2.6 Necessary fees charged by governmental entities; plus

26.2.7 Necessary construction-related service fees charged by non-governmental entities, such as landfill tipping fees; plus

26.2.8 Reasonable rental costs of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per hour of operation: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. In lieu of renting, the **City** reserves the right to direct the purchase of non-operating equipment (scaffolding, sheeting systems, road plates, etc.), with payment on a purchase-salvage/life cycle basis, if less than the projected rental costs; plus

26.2.9 Workers' Compensation Insurance, and any insurance coverage expressly required by the **City** for the performance of the **Extra Work** which is different than the types of insurance required by Article 22 and Schedule A of the General Conditions. The cost of Workers' Compensation Insurance is subject to applicable payroll limitation caps and shall be based upon the carrier's Manual Rate for such insurance derived from the applicable class Loss Cost ("LC") and carrier's Lost Cost Multiplier ("LCM") approved by the New York State Department of Financial Services, and with the exception of experience rating, rate modifiers as promulgated by the New York Compensation Insurance Rating Board ("NYCIRB"); plus

26.2.10 Additional costs incurred as a result of the **Extra Work** for performance and payment bonds; plus

26.2.11 Twelve percent (12%) percent of the total of items in Articles 26.2.1 through 26.2.5 as compensation for overhead, except that no percentage for overhead will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes. Overhead shall include without limitation, all costs and expenses in connection with administration, management superintendence, small tools, and insurance required by Schedule A of the General Conditions other than Workers' Compensation Insurance; plus

26.2.12 Ten (10%) percent of the total of items in Articles 26.2.1 through 26.2.5, plus the items in Article 26.2.11, as compensation for profit, except that no percentage for profit will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes; plus

26.2.13 Five (5%) percent of the total of items in Articles 26.2.6 through 26.2.10 as compensation for overhead and profit.

26.3 Where the **Extra Work** is performed in whole or in part by other than the **Contractor's** own forces pursuant to Article 26.2, the **Contractor** shall be paid, subject to pre-audit by the **Engineering Audit Officer**, the cost of such **Work** computed in accordance with Article 26.2 above, plus an additional allowance of five (5%) percent to cover the **Contractor's** overhead and profit.

26.4 Where a change is ordered, involving both **Extra Work** and omitted or reduced **Contract Work**, the **Contract** price shall be adjusted, subject to pre-audit by the **EAO**, in an amount based on the difference between the cost of such **Extra Work** and of the omitted or reduced **Work**.

26.5 Where the **Contractor** and the **Commissioner** can agree upon a fixed price for **Extra Work** in accordance with Article 25.3.2 or another method of payment for **Extra Work** in accordance with Article 25.3.4, or for **Extra Work** ordered in connection with omitted **Work**, such method, subject to pre-audit by the **EAO**, may, at the option of the **Commissioner**, be substituted for the cost plus a percentage method provided in Article 26.2; provided, however, that if the **Extra Work** is performed by a **Subcontractor**, the **Contractor** shall not be entitled to receive more than an additional allowance of five (5%) percent for overhead and profit over

the cost of such **Subcontractor's Work** as computed in accordance with Article 26.2.

ARTICLE 27. RESOLUTION OF DISPUTES

27.1 All disputes between the **City** and the **Contractor** of the kind delineated in this Article 27.1 that arise under, or by virtue of, this **Contract** shall be finally resolved in accordance with the provisions of this Article 27 and the **PPB** Rules. This procedure for resolving all disputes of the kind delineated herein shall be the exclusive means of resolving any such disputes.

27.1.1 This Article 27 shall not apply to disputes concerning matters dealt with in other sections of the **PPB** Rules, or to disputes involving patents, copyrights, trademarks, or trade secrets (as interpreted by the courts of New York State) relating to proprietary rights in computer software.

27.1.2 This Article 27 shall apply only to disputes about the scope of **Work** delineated by the **Contract**, the interpretation of **Contract** documents, the amount to be paid for **Extra Work** or disputed work performed in connection with the **Contract**, the conformity of the **Contractor's Work** to the **Contract**, and the acceptability and quality of the **Contractor's Work**; such disputes arise when the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** makes a determination with which the **Contractor** disagrees.

27.2 All determinations required by this Article 27 shall be made in writing clearly stated, with a reasoned explanation for the determination based on the information and evidence presented to the party making the determination. Failure to make such determination within the time required by this Article 27 shall be deemed a non-determination without prejudice that will allow application to the next level.

27.3 During such time as any dispute is being presented, heard, and considered pursuant to this Article 27, the **Contract** terms shall remain in force and the **Contractor** shall continue to perform **Work** as directed by the **ACCO** or the **Engineer**. Failure of the **Contractor** to continue **Work** as directed shall constitute a waiver by the **Contractor** of its claim.

27.4 Presentation of Disputes to **Commissioner**.

Notice of Dispute and Agency Response. The **Contractor** shall present its dispute in writing ("Notice of Dispute") to the **Commissioner** within thirty (30) Days of receiving written notice of the determination or action that is the subject of the dispute. This notice requirement shall not be read to replace any other notice requirements contained in the **Contract**. The Notice of Dispute shall include all the facts, evidence, documents, or other basis upon which the **Contractor** relies in support of its position, as well as a detailed computation demonstrating how any amount of money claimed by the **Contractor** in the dispute was arrived at. Within thirty (30) Days after receipt of the detailed written submission comprising the complete Notice of Dispute, the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** shall submit to the **Commissioner** all materials he or she deems pertinent to the dispute. Following initial submissions to the **Commissioner**, either party may demand of the other the production of any document or other material the demanding party believes may be relevant to the dispute. The requested party shall produce all relevant materials that are not otherwise protected by a legal privilege recognized by the courts of New York State. Any question of relevancy shall be determined by the **Commissioner** whose decision shall be final. Willful failure of the **Contractor** to produce any requested material whose relevancy the **Contractor** has not disputed, or whose relevancy has been affirmatively determined, shall constitute a waiver by the **Contractor** of its claim.

27.4.1 **Commissioner Inquiry.** The **Commissioner** shall examine the material and may, in his or her discretion, convene an informal conference with the **Contractor**, the **ACCO**, and the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** to resolve the issue by mutual consent prior to reaching a determination. The **Commissioner** may seek such technical or other expertise as he or she shall deem appropriate, including the use of neutral mediators, and require any such additional material from either or both parties as he or she deems fit. The **Commissioner's** ability to render, and the effect of, a decision hereunder shall not be impaired by any negotiations in connection with the dispute presented, whether or not the **Commissioner** participated therein. The **Commissioner** may or, at the request of any party to the dispute, shall compel the participation of any **Other Contractor** with a contract related to the **Work** of this **Contract**, and that **Contractor** shall be bound by the decision of the **Commissioner**. Any **Other Contractor** thus brought into the dispute resolution proceeding shall have the same rights and obligations under this Article 27 as the **Contractor** initiating the dispute.

27.4.2 **Commissioner Determination.** Within thirty (30) **Days** after the receipt of all materials and information, or such longer time as may be agreed to by the parties, the **Commissioner** shall make his or her determination and shall deliver or send a copy of such determination to the **Contractor**, the **ACCO**, and **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner**, as applicable, together with a statement concerning how the decision may be appealed.

27.4.3 **Finality of Commissioner's Decision.** The **Commissioner's** decision shall be final and binding on all parties, unless presented to the Contract Dispute Resolution Board pursuant to this Article 27. The **City** may not take a petition to the Contract Dispute Resolution Board. However, should the **Contractor** take such a petition, the **City** may seek, and the Contract Dispute Resolution Board may render, a determination less favorable to the **Contractor** and more favorable to the **City** than the decision of the **Commissioner**.

27.5 **Presentation of Dispute to the Comptroller.** Before any dispute may be brought by the **Contractor** to the Contract Dispute Resolution Board, the **Contractor** must first present its claim to the **Comptroller** for his or her review, investigation, and possible adjustment.

27.5.1 **Time, Form, and Content of Notice.** Within thirty (30) **Days** of its receipt of a decision by the **Commissioner**, the **Contractor** shall submit to the **Comptroller** and to the **Commissioner** a Notice of Claim regarding its dispute with the **Agency**. The Notice of Claim shall consist of (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written decision of the **Commissioner**; and (iii) a copy of all materials submitted by the **Contractor** to the **Agency**, including the Notice of Dispute. The **Contractor** may not present to the **Comptroller** any material not presented to the **Commissioner**, except at the request of the **Comptroller**.

27.5.2 Response. Within thirty (30) **Days** of receipt of the Notice of Claim, the **Agency** shall make available to the **Comptroller** a copy of all material submitted by the **Agency** to the **Commissioner** in connection with the dispute. The **Agency** may not present to the **Comptroller** any material not presented to the **Commissioner** except at the request of the **Comptroller**.

27.5.3 **Comptroller** Investigation. The **Comptroller** may investigate the claim in dispute and, in the course of such investigation, may exercise all powers provided in Sections 7-201 and 7-203 of the Administrative Code. In addition, the **Comptroller** may demand of either party, and such party shall provide, whatever additional material the **Comptroller** deems pertinent to the claim, including original business records of the **Contractor**. Willful failure of the **Contractor** to produce within fifteen (15) **Days** any material requested by the **Comptroller** shall constitute a waiver by the **Contractor** of its claim. The **Comptroller** may also schedule an informal conference to be attended by the **Contractor**, **Agency** representatives, and any other personnel desired by the **Comptroller**.

27.5.4 Opportunity of **Comptroller** to Compromise or Adjust Claim. The **Comptroller** shall have forty-five (45) **Days** from his or her receipt of all materials referred to in Article 27.5.3 to investigate the disputed claim. The period for investigation and compromise may be further extended by agreement between the **Contractor** and the **Comptroller**, to a maximum of ninety (90) **Days** from the **Comptroller's** receipt of all materials. The **Contractor** may not present its petition to the Contract Dispute Resolution Board until the period for investigation and compromise delineated in this Article 27.5.4 has expired. In compromising or adjusting any claim hereunder, the **Comptroller** may not revise or disregard the terms of the **Contract** between the parties.

27.6 Contract Dispute Resolution Board. There shall be a Contract Dispute Resolution Board composed of:

27.6.1 The chief administrative law judge of the Office of Administrative Trials and Hearings (OATH) or his/her designated OATH administrative law judge, who shall act as chairperson, and may adopt operational procedures and issue such orders consistent with this Article 27 as may be necessary in the execution of the Contract Dispute Resolution Board's functions, including, but not limited to, granting extensions of time to present or respond to submissions;

27.6.2 The **CCPO** or his/her designee; any designee shall have the requisite background to consider and resolve the merits of the dispute and shall not have participated personally and substantially in the particular matter that is the subject of the dispute or report to anyone who so participated; and

27.6.3 A person with appropriate expertise who is not an employee of the **City**. This person shall be selected by the presiding administrative law judge from a prequalified panel of individuals, established and administered by OATH with appropriate background to act as decision-makers in a dispute. Such individual may not have a contract or dispute with the **City** or be an officer or employee of any company or organization that does, or regularly represents persons, companies, or organizations having disputes with the **City**.

27.7 Petition to the Contract Dispute Resolution Board. In the event the claim has not been settled or adjusted by the **Comptroller** within the period provided in this Article 27, the **Contractor**, within thirty (30) **Days** thereafter, may petition the Contract Dispute Resolution Board to review the

Commissioner's determination.

27.7.1 Form and Content of Petition by **Contractor**. The **Contractor** shall present its dispute to the Contract Dispute Resolution Board in the form of a petition, which shall include (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed, and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written Decision of the **Commissioner**, (iii) copies of all materials submitted by the **Contractor** to the Agency; (iv) a copy of the written decision of the **Comptroller**, if any, and (v) copies of all correspondence with, or written material submitted by the **Contractor**, to the **Comptroller**. The **Contractor** shall concurrently submit four (4) complete sets of the Petition: one set to the **City** Corporation Counsel (Attn: Commercial and Real Estate Litigation Division) and three (3) sets to the Contract Dispute Resolution Board at OATH's offices with proof of service on the **City** Corporation Counsel. In addition, the **Contractor** shall submit a copy of the written statement of the substance of the dispute, cited in (i) above, to both the **Commissioner** and the **Comptroller**.

27.7.2 **Agency Response**. Within thirty (30) **Days** of its receipt of the Petition by the **City** Corporation Counsel, the **Agency** shall respond to the brief written statement of the **Contractor** and make available to the Contract Dispute Resolution Board all material it submitted to the **Commissioner** and **Comptroller**. Three (3) complete copies of the **Agency** response shall be provided to the Contract Dispute Resolution Board and one to the **Contractor**. Extensions of time for submittal of the **Agency** response shall be given as necessary upon a showing of good cause or, upon consent of the parties, for an initial period of up to thirty (30) **Days**.

27.7.3 Further Proceedings. The Contract Dispute Resolution Board shall permit the **Contractor** to present its case by submission of memoranda, briefs, and oral argument. The Contract Dispute Resolution Board shall also permit the **Agency** to present its case in response to the **Contractor** by submission of memoranda, briefs, and oral argument. If requested by the **City** Corporation Counsel, the **Comptroller** shall provide reasonable assistance in the preparation of the **Agency's** case. Neither the **Contractor** nor the **Agency** may support its case with any documentation or other material that was not considered by the **Comptroller**, unless requested by the Contract Dispute Resolution Board. The Contract Dispute Resolution Board, in its discretion, may seek such technical or other expert advice as it shall deem appropriate and may seek, on its own or upon application of a party, any such additional material from any party as it deems fit. The Contract Dispute Resolution Board, in its discretion, may combine more than one dispute between the parties for concurrent resolution.

27.7.4 Contract Dispute Resolution Board Determination. Within forty-five (45) **Days** of the conclusion of all written submissions and oral arguments, the Contract Dispute Resolution Board shall render a written decision resolving the dispute. In an unusually complex case, the Contract Dispute Resolution Board may render its decision in a longer period, not to exceed ninety (90) **Days**, and shall so advise the parties at the commencement of this period. The Contract Dispute Resolution Board's decision must be consistent with the terms of the **Contract**. Decisions of the Contract Dispute Resolution Board shall only resolve matters before the Contract Dispute Resolution Board and shall not have precedential effect with respect to matters not before the Contract Dispute Resolution Board.

27.7.5 Notification of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution Board shall send a copy of its decision to the **Contractor**, the **ACCO**, the Engineer, the **Comptroller**, the **City** Corporation Counsel, the CCPO, and the **PPB**. A decision in favor of the **Contractor** shall be subject to the prompt payment provisions of the **PPB** Rules. The

Required Payment Date shall be thirty (30) Days after the date the parties are formally notified of the Contract Dispute Resolution Board's decision.

27.7.6 Finality of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution Board's decision shall be final and binding on all parties. Any party may seek review of the Contract Dispute Resolution Board's decision solely in the form of a challenge, filed within four (4) months of the date of the Contract Dispute Resolution Board's decision, in a court of competent jurisdiction of the State of New York, County of New York pursuant to Article 78 of the Civil Practice Law and Rules. Such review by the court shall be limited to the question of whether or not the Contract Dispute Resolution Board's decision was made in violation of lawful procedure, was affected by an error of **Law**, or was arbitrary and capricious or an abuse of discretion. No evidence or information shall be introduced or relied upon in such proceeding that was not presented to the Contract Dispute Resolution Board in accordance with this Article 27.

27.8 Any termination, cancellation, or alleged breach of the **Contract** prior to or during the pendency of any proceedings pursuant to this Article 27 shall not affect or impair the ability of the **Commissioner** or Contract Dispute Resolution Board to make a binding and final decision pursuant to this Article 27.

ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS

28.1 While the **Contractor** or any of its **Subcontractors** is performing **Work** on a time and material basis or **Extra Work** on a time and material basis ordered by the **Commissioner** under Article 25, or where the **Contractor** believes that it or any of its **Subcontractors** is performing **Extra Work** but a final determination by **Agency** has not been made, or the **Contractor** or any of its **Subcontractors** is performing disputed **Work** (whether on or off the **Site**), or complying with a determination or order under protest in accordance with Articles 11, 27, and 30, in each such case the **Contractor** shall furnish the **Resident Engineer** daily with three (3) copies of written statements signed by the **Contractor's** representative at the **Site** showing:

28.1.1 The name, trade, and number of each worker employed on such **Work** or engaged in complying with such determination or order, the number of hours employed, and the character of the **Work** each is doing; and

28.1.2 The nature and quantity of any materials, plant and equipment furnished or used in connection with the performance of such **Work** or compliance with such determination or order, and from whom purchased or rented.

28.2 A copy of such statement will be countersigned by the **Resident Engineer**, noting thereon any items not agreed to or questioned, and will be returned to the **Contractor** within two (2) **Days** after submission.

28.3 The **Contractor** and its **Subcontractors**, when required by the **Commissioner**, or the **Comptroller**, shall also produce for inspection, at the office of the **Contractor** or **Subcontractor**, any and all of its books, bid documents, financial statements, vouchers, records, daily job diaries and reports, and cancelled checks, and any other documents relating to showing the nature and quantity of the labor, materials, plant and equipment actually used in the performance of such **Work**, or in complying with such determination or order, and the amounts expended therefor, and shall permit the **Commissioner** and the

Comptroller to make such extracts therefrom, or copies thereof, as they or either of them may desire.

28.4 In connection with the examination provided for herein, the **Commissioner**, upon demand therefor, will produce for inspection by the **Contractor** such records as the **Agency** may have with respect to such **Extra Work** or disputed **Work** performed under protest pursuant to order of the **Commissioner**, except those records and reports which may have been prepared for the purpose of determining the accuracy and validity of the **Contractor's** claim.

28.5 Failure to comply strictly with these requirements shall constitute a waiver of any claim for extra compensation or damages on account of the performance of such **Work** or compliance with such determination or order.

ARTICLE 29. OMITTED WORK

29.1 If any **Contract Work** in a lump sum **Contract**, or if any part of a lump sum item in a unit price, lump sum, or percentage-bid **Contract** is omitted by the **Commissioner** pursuant to Article 33, the **Contract** price, subject to audit by the EAO, shall be reduced by a pro rata portion of the lump sum bid amount based upon the percent of **Work** omitted subject to Article 29.4. For the purpose of determining the pro rata portion of the lump sum bid amount, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be the determining factor.

29.2 If the whole of a lump sum item or units of any other item is so omitted by the **Commissioner** in a unit price, lump sum, or percentage-bid **Contract**, then no payment will be made therefor except as provided in Article 29.4.

29.3 For units that have been ordered but are only partially completed, the unit price shall be reduced by a pro rata portion of the unit price bid based upon the percentage of **Work** omitted subject to Article 29.4.

29.4 In the event the **Contractor**, with respect to any omitted **Work**, has purchased any non-cancelable material and/or equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated into the **Work**, the **Contractor** shall be paid for such material and/or equipment in accordance with Article 64.2.1(b); provided, however, such payment is contingent upon the **Contractor's** delivery of such material and/or equipment in acceptable condition to a location designated by the **City**.

29.5 The **Contractor** agrees to make no claim for damages or for loss of overhead and profit with regard to any omitted **Work**.

ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS

30.1 If the **Contractor** shall claim to be sustaining damages by reason of any act or omission of the **City** or its agents, it shall submit to the **Commissioner** within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter to the extent additional damages are being incurred for the same condition, verified statements of the details and the amounts of such damages, together with documentary evidence of such damages. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. Failure of the **Commissioner** to respond in writing to a written request for additional time within thirty (30) **Days** shall be deemed a denial of the request. On failure of the **Contractor** to strictly comply with

the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action or dispute resolution procedure arising under or by reason of this **Contract** shall not be different from or in excess of the statements and documentation made pursuant to this Article 30. This Article 30.1 does not apply to claims submitted to the **Commissioner** pursuant to Article 11 or to claims disputing a determination under Article 27.

30.2 In addition to the foregoing statements, the **Contractor** shall, upon notice from the **Commissioner**, produce for examination at the **Contractor's** office, by the **Engineer, Architect or Project Manager**, all of its books of account, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**, and submit itself and persons in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.3 In addition to the statements required under Article 28 and this Article 30, the **Contractor** and/or its **Subcontractor** shall, within thirty (30) **Days** upon notice from the **Commissioner** or **Comptroller**, produce for examination at the **Contractor's** and/or **Subcontractor's** office, by a representative of either the **Commissioner** or **Comptroller**, all of its books of account, bid documents, financial statements, accountant workpapers, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**. Further, the **Contractor** and/or its **Subcontractor** shall submit any person in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.4 Unless the information and examination required under Article 30.3 is provided by the **Contractor** and/or its **Subcontractor** upon thirty (30) **Days'** notice from the **Commissioner** or **Comptroller**, or upon the **Commissioner's** or **Comptroller's** written authorization to extend the time to comply, the **City** shall be released from all claims arising under, relating to or by reason of this **Contract**, except for sums certified by the **Commissioner** to be due under the provisions of this **Contract**. It is further stipulated and agreed that no person has the power to waive any of the foregoing provisions and that in any action or dispute resolution procedure against the **City** to recover any sum in excess of the sums certified by the **Commissioner** to be due under or by reason of this **Contract**, the **Contractor** must allege in its complaint and prove, at trial or during such dispute resolution procedure, compliance with the provisions of this Article 30.

30.5 In addition, after the commencement of any action or dispute resolution procedure by the **Contractor** arising under or by reason of this **Contract**, the **City** shall have the right to require the **Contractor** to produce for examination under oath, up until the trial of the action or hearing before the Contract Dispute Resolution Board, the books and documents described in Article 30.3 and submit itself and all persons in its employ for examination under oath. If this Article 30 is not complied with as required, then the **Contractor** hereby consents to the dismissal of the action or dispute resolution procedure.

CHAPTER VII: POWERS OF THE RESIDENT ENGINEER, THE ENGINEER OR ARCHITECT AND THE COMMISSIONER

ARTICLE 31. THE RESIDENT ENGINEER

31.1 The **Resident Engineer** shall have the power to inspect, supervise, and control the performance

of the **Work**, subject to review by the **Commissioner**. The **Resident Engineer** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER

32.1 The **Engineer** or **Architect** or **Project Manager**, in addition to those matters elsewhere herein delegated to the **Engineer** and expressly made subject to his/her determination, direction or approval, shall have the power, subject to review by the **Commissioner**:

32.1.1 To determine the amount, quality, and location of the **Work** to be paid for hereunder; and

32.1.2 To determine all questions in relation to the **Work**, to interpret the **Contract Drawings, Specifications, and Addenda**, and to resolve all patent inconsistencies or ambiguities therein; and

32.1.3 To determine how the **Work** of this **Contract** shall be coordinated with **Work** of **Other Contractors** engaged simultaneously on this **Project**, including the power to suspend any part of the **Work**, but not the whole thereof; and

32.1.4 To make minor changes in the **Work** as he/she deems necessary, provided such changes do not result in a net change in the cost to the **City** or to the **Contractor** of the **Work** to be done under the **Contract**; and

32.1.5 To amplify the **Contract Drawings**, add explanatory information and furnish additional **Specifications** and drawings, consistent with this **Contract**.

32.2 The foregoing enumeration shall not imply any limitation upon the power of the **Engineer** or **Architect** or **Project Manager**, for it is the intent of this **Contract** that all of the **Work** shall generally be subject to his/her determination, direction, and approval, except where the determination, direction or approval of someone other than the **Engineer** or **Architect** or **Project Manager** is expressly called for herein.

32.3 The **Engineer** or **Architect** or **Project Manager** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 33. THE COMMISSIONER

33.1 The **Commissioner**, in addition to those matters elsewhere herein expressly made subject to his/her determination, direction or approval, shall have the power:

33.1.1 To review and make determinations on any and all questions in relation to this **Contract** and its performance; and

33.1.2 To modify or change this **Contract** so as to require the performance of **Extra Work** (subject, however, to the limitations specified in Article 25) or the omission of **Contract Work**; and

33.1.3 To suspend the whole or any part of the **Work** whenever in his/her judgment such suspension is required:

33.1.3(a) In the interest of the **City** generally; or

33.1.3(b) To coordinate the **Work** of the various contractors engaged on this **Project** pursuant to the provisions of Article 12; or

33.1.3(c) To expedite the completion of the entire **Project** even though the completion of this particular **Contract** may thereby be delayed.

ARTICLE 34. NO ESTOPPEL

34.1 Neither the **City** nor any **Agency**, official, agent or employee thereof, shall be bound, precluded or estopped by any determination, decision, approval, order, letter, payment or certificate made or given under or in connection with this **Contract** by the **City**, the **Commissioner**, the **Engineer**, the **Resident Engineer**, or any other official, agent or employee of the **City**, either before or after the final completion and acceptance of the **Work** and payment therefor:

34.1.1 From showing the true and correct classification, amount, quality or character of the **Work** actually done; or that any such determination, decision, order, letter, payment or certificate was untrue, incorrect or improperly made in any particular, or that the **Work**, or any part thereof, does not in fact conform to the requirements of this **Contract**; and

34.1.2 From demanding and recovering from the **Contractor** any overpayment made to it, or such damages as the **City** may sustain by reason of the **Contractor's** failure to perform each and every part of its **Contract**.

CHAPTER VIII: LABOR PROVISIONS

ARTICLE 35. EMPLOYEES

35.1 The **Contractor** and its **Subcontractors** shall not employ on the **Work**:

35.1.1 Anyone who is not competent, faithful and skilled in the **Work** for which he/she shall be employed; and whenever the **Commissioner** shall inform the **Contractor**, in writing, that any employee is, in his/her opinion, incompetent, unfaithful or disobedient, that employee shall be discharged from the **Work** forthwith, and shall not again be employed upon it; or

35.1.2 Any labor, materials or means whose employment, or utilization during the course of this **Contract**, may tend to or in any way cause or result in strikes, work stoppages, delays, suspension of **Work** or similar troubles by workers employed by the **Contractor** or its **Subcontractors**, or by any of the trades working in or about the buildings and premises where **Work** is being performed under this **Contract**, or by **Other Contractors** or their **Subcontractors** pursuant to other contracts, or on any other building or premises owned or operated by the **City**, its **Agencies**, departments, boards or authorities. Any violation by the **Contractor** of this requirement may, upon certification of the **Commissioner**, be considered as proper and sufficient cause for declaring the **Contractor** to be in default, and for the **City** to take action against it as set forth in Chapter X of this **Contract**, or such other article of this **Contract** as the Commissioner may deem proper; or

35.1.3 In accordance with Section 220.3-e of the Labor Law of the State of New York (hereinafter “Labor Law”), the **Contractor** and its **Subcontractors** shall not employ on the **Work** any apprentice, unless he/she is a registered individual, under a bona fide program registered with the New York State Department of Labor. The allowable ratio of apprentices to journey-level workers in any craft classification shall not be greater than the ratio permitted to the **Contractor** as to its work force on any job under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the wage rate determined by the **Comptroller** of the **City** for the classification of **Work** actually performed. The **Contractor** or **Subcontractor** will be required to furnish written evidence of the registration of its program and apprentices as well as all the appropriate ratios and wage rates, for the area of the construction prior to using any apprentices on the **Contract Work**.

35.2 If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, all laborers, workers, and mechanics employed in the performance of the **Contract** on the public work site, either by the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by the **Contract**, shall be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor’s Occupational Safety and Health Administration that is at least ten (10) hours in duration.

35.3 In accordance with Local Law Nos. 30-2012 and 33-2012, codified at sections 6-132 and 12-113 of the Administrative Code, respectively,

35.3.1 The **Contractor** shall not take an adverse personnel action with respect to an officer or employee in retaliation for such officer or employee making a report of information concerning conduct which such officer or employee knows or reasonably believes to involve corruption, criminal activity, conflict of interest, gross mismanagement or abuse of authority by any officer or employee relating to this **Contract** to (a) the Commissioner of the Department of Investigation, (b) a member of the New York City Council, the Public Advocate, or the **Comptroller**, or (c) the **CCPO**, **ACCO**, **Agency** head, or **Commissioner**.

35.3.2 If any of the **Contractor**’s officers or employees believes that he or she has been the subject of an adverse personnel action in violation of Article 35.3.1, he or she shall be entitled to bring a cause of action against the **Contractor** to recover all relief necessary to make him or her whole. Such relief may include but is not limited to: (a) an injunction to restrain continued retaliation, (b) reinstatement to the position such employee would have had but for the retaliation or to an equivalent position, (c) reinstatement of full fringe benefits and seniority rights, (d) payment of two times back pay, plus interest, and (e) compensation for any special damages sustained as a result of the retaliation, including litigation costs and reasonable attorney’s fees.

35.3.3 The **Contractor** shall post a notice provided by the **City** in a prominent and accessible place on any site where work pursuant to the **Contract** is performed that contains information about:

35.3.3(a) how its employees can report to the New York City Department of Investigation allegations of fraud, false claims, criminality or corruption arising out of or in connection with the **Contract**; and

35.3.3(b) the rights and remedies afforded to its employees under Administrative Code sections 7-805 (the New York City False Claims Act) and 12-113 (the Whistleblower Protection Expansion Act) for lawful acts taken in connection with the

reporting of allegations of fraud, false claims, criminality or corruption in connection with the **Contract**.

35.3.4 For the purposes of this Article 35.3, “adverse personnel action” includes dismissal, demotion, suspension, disciplinary action, negative performance evaluation, any action resulting in loss of staff, office space, equipment or other benefit, failure to appoint, failure to promote, or any transfer or assignment or failure to transfer or assign against the wishes of the affected officer or employee.

35.3.5 This Article 35.3 is applicable to all of the **Contractor’s Subcontractors** having subcontracts with a value in excess of \$100,000; accordingly, the **Contractor** shall include this rider in all subcontracts with a value a value in excess of \$100,000.

35.4 Article 35.3 is not applicable to this **Contract** if it is valued at \$100,000 or less. Articles 35.3.1, 35.3.2, 35.3.4, and 35.3.5 are not applicable to this **Contract** if it was solicited pursuant to a finding of an emergency.

35.5 Paid Sick Leave Law.

35.5.1 Introduction and General Provisions.

35.5.1(a) The Earned Sick Time Act, also known as the Paid Sick Leave Law (“PSLL”), requires covered employees who annually perform more than 80 hours of work in New York City to be provided with paid sick time². Contractors of the **City** or of other governmental entities may be required to provide sick time pursuant to the PSLL.

35.5.1(b) The PSLL became effective on April 1, 2014, and is codified at Title 20, Chapter 8, of the New York City Administrative Code. It is administered by the City’s Department of Consumer Affairs (“DCA”); DCA’s rules promulgated under the PSLL are codified at Chapter 7 of Title 6 of the Rules of the City of New York (“Rules”).

35.5.1(c) The **Contractor** agrees to comply in all respects with the PSLL and the Rules, and as amended, if applicable, in the performance of this **Contract**. The **Contractor** further acknowledges that such compliance is a material term of this **Contract** and that failure to comply with the PSLL in performance of this **Contract** may result in its termination.

35.5.1(d) The **Contractor** must notify the **Agency Chief Contracting Officer** of the **Agency** with whom it is contracting in writing within ten (10) days of receipt of a complaint (whether oral or written) regarding the PSLL involving the performance of this **Contract**. Additionally, the **Contractor** must cooperate with DCA’s education efforts and must comply with DCA’s subpoenas and other document demands as set forth in the PSLL and Rules.

35.5.1(e) The PSLL is summarized below for the convenience of the **Contractor**. The **Contractor** is advised to review the PSLL and Rules in their entirety. On the

² Pursuant to the PSLL, if fewer than five employees work for the same employer, as determined pursuant to New York City Administrative Code § 20-912(g), such employer has the option of providing such employees uncompensated sick time.

website www.nyc.gov/PaidSickLeave there are links to the PSL and the associated Rules as well as additional resources for employers, such as Frequently Asked Questions, timekeeping tools and model forms, and an event calendar of upcoming presentations and webinars at which the **Contractor** can get more information about how to comply with the PSL. The **Contractor** acknowledges that it is responsible for compliance with the PSL notwithstanding any inconsistent language contained herein.

35.5.2 Pursuant to the PSL and the Rules: Applicability, Accrual, and Use.

35.5.2(a) An employee who works within the City of New York for more than eighty hours in any consecutive 12-month period designated by the employer as its “calendar year” pursuant to the PSL (“Year”) must be provided sick time. Employers must provide a minimum of one hour of sick time for every 30 hours worked by an employee and compensation for such sick time must be provided at the greater of the employee’s regular hourly rate or the minimum wage. Employers are not required to provide more than 40 hours of sick time to an employee in any Year.

35.5.2(b) An employee has the right to determine how much sick time he or she will use, provided that employers may set a reasonable minimum increment for the use of sick time not to exceed four hours per **Day**. In addition, an employee may carry over up to 40 hours of unused sick time to the following Year, provided that no employer is required to allow the use of more than forty hours of sick time in a Year or carry over unused paid sick time if the employee is paid for such unused sick time and the employer provides the employee with at least the legally required amount of paid sick time for such employee for the immediately subsequent Year on the first **Day** of such Year.

35.5.2(c) An employee entitled to sick time pursuant to the PSL may use sick time for any of the following:

- i. such employee’s mental illness, physical illness, injury, or health condition or the care of such illness, injury, or condition or such employee’s need for medical diagnosis or preventive medical care;
- ii. such employee’s care of a family member (an employee’s child, spouse, domestic partner, parent, sibling, grandchild or grandparent, or the child or parent of an employee’s spouse or domestic partner) who has a mental illness, physical illness, injury or health condition or who has a need for medical diagnosis or preventive medical care;
- iii. closure of such employee’s place of business by order of a public official due to a public health emergency; or
- iv. such employee’s need to care for a child whose school or childcare provider has been closed due to a public health emergency.

35.5.2(d) An employer must not require an employee, as a condition of taking sick time, to search for a replacement. However, an employer may require an employee to provide: reasonable notice of the need to use sick time; reasonable documentation that the use of sick time was needed for a reason above if for an absence of more than three consecutive work days; and/or written confirmation that an employee used sick time pursuant to the PSL. However, an employer may not require documentation specifying the nature of a medical condition or otherwise require disclosure of the details of a medical condition as a condition of providing sick time and health information obtained solely due to an employee’s use of sick time pursuant to the PSL must be treated by the

employer as confidential.

35.5.2(e) If an employer chooses to impose any permissible discretionary requirement as a condition of using sick time, it must provide to all employees a written policy containing those requirements, using a delivery method that reasonably ensures that employees receive the policy. If such employer has not provided its written policy, it may not deny sick time to an employee because of non-compliance with such a policy.

35.5.2(f) Sick time to which an employee is entitled must be paid no later than the payday for the next regular payroll period beginning after the sick time was used.

35.5.3 Exemptions and Exceptions. Notwithstanding the above, the PSLL does not apply to any of the following:

35.5.3(a) an independent contractor who does not meet the definition of employee under section 190(2) of the New York State Labor Law;

35.5.3(b) an employee covered by a valid collective bargaining agreement in effect on April 1, 2014, until the termination of such agreement;

35.5.3(c) an employee in the construction or grocery industry covered by a valid collective bargaining agreement if the provisions of the PSLL are expressly waived in such collective bargaining agreement;

35.5.3(d) an employee covered by another valid collective bargaining agreement if such provisions are expressly waived in such agreement and such agreement provides a benefit comparable to that provided by the PSLL for such employee;

35.5.3(e) an audiologist, occupational therapist, physical therapist, or speech language pathologist who is licensed by the New York State Department of Education and who calls in for work assignments at will, determines his or her own schedule, has the ability to reject or accept any assignment referred to him or her, and is paid an average hourly wage that is at least four times the federal minimum wage;

35.5.3(f) an employee in a work study program under Section 2753 of Chapter 42 of the United States Code;

35.5.3(g) an employee whose work is compensated by a qualified scholarship program as that term is defined in the Internal Revenue Code, Section 117 of Chapter 20 of the United States Code; or

35.5.3(h) a participant in a Work Experience Program (WEP) under section 336-c of the New York State Social Services Law.

35.5.4 Retaliation Prohibited. An employer may not threaten or engage in retaliation against an employee for exercising or attempting in good faith to exercise any right provided by the PSLL. In addition, an employer may not interfere with any investigation, proceeding, or hearing pursuant to the PSLL.

35.5.5 Notice of Rights.

35.5.5(a) An employer must provide its employees with written notice of their rights pursuant to the PSLL. Such notice must be in English and the primary language spoken

by an employee, provided that DCA has made available a translation into such language. Downloadable notices are available on DCA's website at <http://www.nyc.gov/html/dca/html/law/PaidSickLeave.shtml>.

35.5.5(b) Any person or entity that willfully violates these notice requirements is subject to a civil penalty in an amount not to exceed fifty dollars for each employee who was not given appropriate notice.

35.5.6 Records. An employer must retain records documenting its compliance with the PSLL for a period of at least three years, and must allow DCA to access such records in furtherance of an investigation related to an alleged violation of the PSLL.

35.5.7 Enforcement and Penalties.

35.5.7(a) Upon receiving a complaint alleging a violation of the PSLL, DCA has the right to investigate such complaint and attempt to resolve it through mediation. Within **30 Days** of written notification of a complaint by DCA, or sooner in certain circumstances, the employer must provide DCA with a written response and such other information as DCA may request. If DCA believes that a violation of the PSLL has occurred, it has the right to issue a notice of violation to the employer.

35.5.7(b) DCA has the power to grant an employee or former employee all appropriate relief as set forth in New York City Administrative Code § 20-924(d). Such relief may include, among other remedies, treble damages for the wages that should have been paid, damages for unlawful retaliation, and damages and reinstatement for unlawful discharge. In addition, DCA may impose on an employer found to have violated the PSLL civil penalties not to exceed \$500 for a first violation, \$750 for a second violation within two years of the first violation, and \$1,000 for each succeeding violation within two years of the previous violation.

35.5.8 More Generous Policies and Other Legal Requirements. Nothing in the PSLL is intended to discourage, prohibit, diminish, or impair the adoption or retention of a more generous sick time policy, or the obligation of an employer to comply with any contract, collective bargaining agreement, employment benefit plan or other agreement providing more generous sick time. The PSLL provides minimum requirements pertaining to sick time and does not preempt, limit or otherwise affect the applicability of any other law, regulation, rule, requirement, policy or standard that provides for greater accrual or use by employees of sick leave or time, whether paid or unpaid, or that extends other protections to employees. The PSLL may not be construed as creating or imposing any requirement in conflict with any federal or state law, rule or regulation.

35.6 HireNYC: Hiring and Reporting Requirements. This Article 35.6 applies to construction contracts of \$1,000,000 or more. The **Contractor** shall comply with the requirements of Articles 35.6.1-35.6.5 for all non-trades jobs (e.g., for an administrative position arising out of **Work** ant located in New York City). The **Contractor** shall reasonably cooperate with SBS and the **City** on specific outreach events, including "Hire-on-the-Spot" events, for the hiring of trades workers in connection with the **Work**. If provided elsewhere in this **Contract**, this **Contract** is subject to a project labor agreement.

35.6.1 Enrollment. The **Contractor** shall enroll with the HireNYC system, found at www.nyc.gov/sbs, within thirty (30) days after the registration of this **Contract** pursuant to Section 328 of the New York City Charter. The **Contractor** shall provide information about the business, designate a primary contact and say whether it intends to hire for any entry

to mid-level job opportunities arising from this **Contract** and located in New York City, and, if so, the approximate start date of the first hire.

35.6.2 Job Posting Requirements.

35.6.2(a) Once enrolled in HireNYC, the **Contractor** agrees to update the HireNYC portal with all entry to mid-level job opportunities arising from this **Contract** and located in New York City, if any, which shall be defined as jobs requiring no more than an associate degree, as provided by the New York State Department of Labor (see Column F of <https://labor.ny.gov/stats/2012-2022-NYS-Employment-Prospects.xls>). The information to be updated includes the types of entry and mid-level positions made available from the work arising from the **Contract** and located in New York City, the number of positions, the anticipated schedule of initiating the hiring process for these positions, and the contact information for the **Contractor's** representative charged with overseeing hiring. The **Contractor** must update the HireNYC portal with any hiring needs arising from the contract and located in New York City, and the requirements of the jobs to be filled, no less than three weeks prior to the intended first day of employment for each new position, except with the permission of SBS, not to be unreasonably withheld, and must also update the HireNYC portal as set forth below.

35.6.2(b) After enrollment through HireNYC and submission of relevant information, SBS will work with the **Contractor** to develop a recruitment plan which will outline the candidate screening process, and will provide clear instructions as to when, where, and how interviews will take place. HireNYC will screen applicants based on employer requirements and refer applicants whom it believes are qualified to the **Contractor** for interviews. The **Contractor** must interview referred applicants whom it believes are qualified.

35.6.2(c) After completing an interview of a candidate referred by HireNYC, the **Contractor** must provide feedback via the portal within twenty (20) business days to indicate which candidates were interviewed and hired, if any. In addition, the **Contractor** shall provide the start date of new hires, and additional information reasonably related to such hires, within twenty (20) business days after the start date. In the event the **Contractor** does not have any job openings covered by this Rider in any given year, the **Contractor** shall be required to provide an annual update to HireNYC to that effect. For this purpose, the reporting year shall run from the date of the registration of the **Contract** pursuant to Charter section 328 and each anniversary date.

35.6.2(d) These requirements do not limit the **Contractor's** ability to assess the qualifications of prospective workers, and to make final hiring and retention decisions. No provision of this Article 35.6 shall be interpreted so as to require the **Contractor** to employ any particular worker.

35.6.2(e) In addition, the provisions of this Article 35.6 shall not apply to positions that the **Contractor** intends to fill with employees employed pursuant to the job retention provision of Section 22-505 of the Administrative Code of the City of New York. The **Contractor** shall not be required to report such openings with HireNYC. However, the **Contractor** shall enroll with the HireNYC system pursuant to Article 35.6.1, above, and, if such positions subsequently become open, then the remaining provisions of this Article 35.6 will apply.

35.6.3 Breach and Liquidated Damages. If the **Contractor** fails to comply with the terms of the **Contract** and this Article 35.6 (1) by not enrolling its business with HireNYC; (2) by not informing HireNYC, as required, of open positions; or (3) by failing to interview a qualified candidate, the **Agency** may assess liquidated damages in the amount of two-thousand five hundred dollars (\$2,500) per breach. For all other events of noncompliance with the terms of this Article 35.6, the **Agency** may assess liquidated damages in the amount of five hundred dollars (\$500) per breach. Furthermore, in the event the **Contractor** breaches the requirements of this Article 35.6 during the term of the **Contract**, the **City** may hold the **Contractor** in default of this **Contract**.

35.6.4 Audit Compliance. In addition to the auditing requirements set forth in other parts of the **Contract**, the **Contractor** shall permit SBS and the **City** to inspect any and all records concerning or relating to job openings or the hiring of individuals for work arising from the **Contract** and located in New York City. The **Contractor** shall permit an inspection within seven (7) business days of the request.

35.6.5 Other Reporting Requirements. The **Contractor** shall report to the **City**, on a monthly basis, all information reasonably requested by the **City** that is necessary for the **City** to comply with any reporting requirements imposed by **Law**, including any requirement that the **City** maintain a publicly accessible database. In addition, the **Contractor** agrees to comply with all reporting requirements imposed by **Law**, or as otherwise requested by the **City**.

35.6.6 Federal Hiring Requirements. If this **Contract** is federally funded (as indicated elsewhere in this **Contract**), the **Contractor** shall comply with all federal hiring requirements as may be set forth in this **Contract**, including, as applicable: (a) Section 3 of the HUD Act of 1968, which requires, to the greatest extent feasible, economic opportunities for 30 percent of new hires be given to low- and very low-income persons, particularly persons who are recipients of HUD assistance for housing and Executive Order 11246, which prohibits discrimination in employment due to race, color, religion, sex or national origin, and requires the implementation of goals for minority and female participation for work involving any construction trade.

ARTICLE 36. NO DISCRIMINATION

36.1 The **Contractor** specifically agrees, as required by Labor Law Section 220-e, as amended, that:

36.1.1 In the hiring of employees for the performance of **Work** under this **Contract** or any subcontract hereunder, neither the **Contractor**, **Subcontractor**, nor any person acting on behalf of such **Contractor** or **Subcontractor**, shall by reason of race, creed, color or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the **Work** to which the employment relates;

36.1.2 Neither the **Contractor**, **Subcontractor**, nor any person on its behalf shall, in any manner, discriminate against or intimidate any employee hired for the performance of **Work** under this **Contract** on account of race, creed, color or national origin;

36.1.3 There may be deducted from the amount payable to the **Contractor** by the **City** under this **Contract** a penalty of fifty (\$50.00) dollars for each person for each **Day** during which such person was discriminated against or intimidated in violation of the provisions of this

Contract; and

36.1.4 This **Contract** may be cancelled or terminated by the **City** and all moneys due or to become due hereunder may be forfeited, for a second or any subsequent violation of the terms or conditions of this Article 36.

36.1.5 This Article 36 covers all construction, alteration and repair of any public building or public work occurring in the State of New York and the manufacture, sale, and distribution of materials, equipment, and supplies to the extent that such operations are performed within the State of New York pursuant to this **Contract**.

36.2 The **Contractor** specifically agrees, as required by Section 6-108 of the Administrative Code, as amended, that:

36.2.1 It shall be unlawful for any person engaged in the construction, alteration or repair of buildings or engaged in the construction or repair of streets or highways pursuant to a **Contract** with the **City** or engaged in the manufacture, sale or distribution of materials, equipment or supplies pursuant to a **Contract** with the **City** to refuse to employ or to refuse to continue in any employment any person on account of the race, color or creed of such person.

36.2.2 It shall be unlawful for any person or any servant, agent or employee of any person, described in Article 36.1.2, to ask, indicate or transmit, orally or in writing, directly or indirectly, the race, color or creed or religious affiliation of any person employed or seeking employment from such person, firm or corporation.

36.2.3 Breach of the foregoing provisions shall be deemed a violation of a material provision of this **Contract**.

36.2.4 Any person, or the employee, manager or owner of or officer of such firm or corporation who shall violate any of the provisions of this Article 36.2 shall, upon conviction thereof, be punished by a fine of not more than one hundred (\$100.00) dollars or by imprisonment for not more than thirty (30) **Days**, or both.

36.3 This **Contract** is subject to the requirements of Executive Order No. 50 (1980) (“E.O. 50”), as revised, and the rules and regulations promulgated thereunder. No contract will be awarded unless and until these requirements have been complied with in their entirety. By signing this **Contract**, the **Contractor** agrees that it:

36.3.1 Will not engage in any unlawful discrimination against any employee or applicant for employment because of race, creed, color, national origin, sex, age, disability, marital status or sexual orientation with respect to all employment decisions including, but not limited to, recruitment, hiring, upgrading, demotion, downgrading, transfer, training, rates of pay or other forms of compensation, layoff, termination, and all other terms and conditions of employment; and

36.3.2 Will not engage in any unlawful discrimination in the selection of **Subcontractors** on the basis of the owner’s race, color, creed, national origin, sex, age, disability, marital status or sexual orientation; and

36.3.3 Will state in all solicitations or advertisements for employees placed by or on behalf of the **Contractor** that all qualified applicants will receive consideration for employment without unlawful discrimination based on race, creed, color, national origin, sex, age, citizens status,

disability, marital status, sexual orientation, or that it is an equal employment opportunity employer; and

36.3.4 Will send to each labor organization or representative of workers with which it has a collective bargaining agreement or other contract or memorandum of understanding, written notification of its equal employment opportunity commitments under E.O. 50 and the rules and regulations promulgated thereunder; and

36.3.5 Will furnish, before the award of the **Contract**, all information and reports, including an employment report, that are required by E.O. 50, the rules and regulations promulgated thereunder, and orders of the **City** Department of Business Services, Division of Labor Services (**DLS**) and will permit access to its books, records, and accounts by the **DLS** for the purposes of investigation to ascertain compliance with such rules, regulations, and orders.

36.4 The **Contractor** understands that in the event of its noncompliance with the nondiscrimination clauses of this **Contract** or with any of such rules, regulations, or orders, such noncompliance shall constitute a material breach of this **Contract** and noncompliance with E.O. 50 and the rules and regulations promulgated thereunder. After a hearing held pursuant to the rules of the **DLS**, the Director of the **DLS** may direct the **Commissioner** to impose any or all of the following sanctions:

36.4.1 Disapproval of the **Contractor**; and/or

36.4.2 Suspension or termination of the **Contract**; and/or

36.4.3 Declaring the **Contractor** in default; and/or

36.4.4 In lieu of any of the foregoing sanctions, the Director of the **DLS** may impose an employment program.

In addition to any actions taken under this **Contract**, failure to comply with E.O. 50 and the rules and regulations promulgated thereunder, in one or more instances, may result in a **City Agency** declaring the **Contractor** to be non-responsible in future procurements. The **Contractor** further agrees that it will refrain from entering into any **Contract** or **Contract** modification subject to E.O. 50 and the rules and regulations promulgated thereunder with a **Subcontractor** who is not in compliance with the requirements of E.O. 50 and the rules and regulations promulgated thereunder.

36.5 The **Contractor** specifically agrees, as required by Section 6-123 of the Administrative Code, that:

36.5.1 The **Contractor** will not engage in any unlawful discriminatory practice in violation of Title 8 of the Administrative Code; and

36.5.2 Any failure to comply with this Article 36.5 may subject the **Contractor** to the remedies set forth in Section 6-123 of the Administrative Code, including, where appropriate, sanctions such as withholding of payment, imposition of an employment program, finding the **Contractor** to be in default, cancellation of the **Contract**, or any other sanction or remedy provided by **Law** or **Contract**.

ARTICLE 37. LABOR LAW REQUIREMENTS

37.1 The **Contractor** shall strictly comply with all applicable provisions of the Labor Law, as

amended. Such compliance is a material term of this **Contract**.

37.2 The **Contractor** specifically agrees, as required by Labor Law Sections 220 and 220-d, as amended, that:

37.2.1 Hours of **Work**: No laborer, worker, or mechanic in the employ of the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by this **Contract** shall be permitted or required to work more than eight (8) hours in any one (1) **Day**, or more than five (5) **Days** in any one (1) week, except as provided in the Labor Law and in cases of extraordinary emergency including fire, flood, or danger to life or property, or in the case of national emergency when so proclaimed by the President of the United States of America.

37.2.2 In situations in which there are not sufficient laborers, workers, and mechanics who may be employed to carry on expeditiously the **Work** contemplated by this **Contract** as a result of such restrictions upon the number of hours and **Days** of labor, and the immediate commencement or prosecution or completion without undue delay of the **Work** is necessary for the preservation of the **Site** and/or for the protection of the life and limb of the persons using the same, such laborers, workers, and mechanics shall be permitted or required to work more than eight (8) hours in any one (1) **Day**; or five (5) **Days** in any one (1) week; provided, however, that upon application of any **Contractor**, the **Commissioner** shall have first certified to the Commissioner of Labor of the State of New York (hereinafter "Commissioner of Labor") that such public **Work** is of an important nature and that a delay in carrying it to completion would result in serious disadvantage to the public; and provided, further, that such Commissioner of Labor shall have determined that such an emergency does in fact exist as provided in Labor Law Section 220.2.

37.2.3 Failure of the **Commissioner** to make such a certification to the Commissioner of Labor shall not entitle the **Contractor** to damages for delay or for any cause whatsoever.

37.2.4 Prevailing Rate of Wages: The wages to be paid for a legal day's **Work** to laborers, workers, or mechanics employed upon the **Work** contemplated by this **Contract** or upon any materials to be used thereon shall not be less than the "prevailing rate of wage" as defined in Labor Law Section 220, and as fixed by the **Comptroller** in the attached Schedule of Wage Rates and in updated schedules thereof. The prevailing wage rates and supplemental benefits to be paid are those in effect at the time the **Work** is being performed.

37.2.5 Requests for interpretation or correction in the Information for Bidders includes all requests for clarification of the classification of trades to be employed in the performance of the **Work** under this **Contract**. In the event that a trade not listed in the **Contract** is in fact employed during the performance of this **Contract**, the **Contractor** shall be required to obtain from the **Agency** the prevailing wage rates and supplementary benefits for the trades used and to complete the performance of this **Contract** at the price at which the **Contract** was awarded.

37.2.6 Minimum Wages: Except for employees whose wage is required to be fixed pursuant to Labor Law Section 220, all persons employed by the **Contractor** and any **Subcontractor** in the manufacture or furnishing of the supplies, materials, or equipment, or the furnishing of work, labor, or services, used in the performance of this **Contract**, shall be paid, without subsequent deduction or rebate unless expressly authorized by **Law**, not less than the sum mandated by **Law**.

37.3 Working Conditions: No part of the **Work**, labor or services shall be performed or rendered by

the **Contractor** in any plants, factories, buildings or surroundings or under working conditions which are unsanitary or hazardous or dangerous to the health and safety of employees engaged in the performance of this **Contract**. Compliance with the safety, sanitary, and factory inspection **Laws** of the state in which the **Work** is to be performed shall be prima facie evidence of compliance with this Article 37.3.

37.4 Prevailing Wage Enforcement: The **Contractor** agrees to pay for all costs incurred by the **City** in enforcing prevailing wage requirements, including the cost of any investigation conducted by or on behalf of the **Agency** or the **Comptroller**, where the **City** discovers a failure to comply with any of the requirements of this Article 37 by the **Contractor** or its **Subcontractor(s)**. The **Contractor** also agrees that, should it fail or refuse to pay for any such investigation, the **Agency** is hereby authorized to deduct from a **Contractor's** account an amount equal to the cost of such investigation.

37.4.1 The Labor Law Section 220 and Section 220-d, as amended, provide that this **Contract** shall be forfeited and no sum paid for any **Work** done hereunder on a second conviction for willfully paying less than:

37.4.1(a) The stipulated prevailing wage scale as provided in Labor Law section 220, as amended, or

37.4.1(b) The stipulated minimum hourly wage scale as provided in Labor Law section 220-d, as amended.

37.4.2 For any breach or violation of either working conditions (Article 37.3) or minimum wages (Article 37.2.6) provisions, the party responsible therefor shall be liable to the **City** for liquidated damages, which may be withheld from any amounts due on any contracts with the **City** of such party responsible, or may be recovered in actions brought by the **City** Corporation Counsel in the name of the **City**, in addition to damages for any other breach of this **Contract**, for a sum equal to the amount of any underpayment of wages due to any employee engaged in the performance of this **Contract**. In addition, the **Commissioner** shall have the right to cancel contracts and enter into other contracts for the completion of the original contract, with or without public letting, and the original **Contractor** shall be liable for any additional cost. All sums withheld or recovered as deductions, rebates, refunds, or underpayment of wages hereunder, shall be held in a special deposit account and shall be paid without interest, on order of the **Comptroller**, directly to the employees who have been paid less than minimum rates of pay as set forth herein and on whose account such sums were withheld or recovered, provided that no claims by employees for such payments shall be entertained unless made within two (2) years from the date of actual notice to the **Contractor** of the withholding or recovery of such sums by the **City**.

37.4.3 A determination by the **Comptroller** that a **Contractor** and/or its **Subcontractor** willfully violated Labor Law Section 220 will be forwarded to the **City's** five District Attorneys for review.

37.4.4 The **Contractor's** or **Subcontractor's** noncompliance with this Article 37.4 and Labor Law Section 220 may result in an unsatisfactory performance evaluation and the **Comptroller** may also find and determine that the **Contractor** or **Subcontractor** willfully violated the New York Labor **Law**.

37.4.4(a) An unsatisfactory performance evaluation for noncompliance with this Article 37.4 may result in a determination that the **Contractor** is a non-responsible bidder on subsequent procurements with the **City** and thus a rejection of a future award

of a contract with the **City**, as well as any other sanctions provided for by **Law**.

37.4.4(b) Labor Law Section 220-b, as amended, provides that when two (2) final determinations have been rendered against a **Contractor** or **Subcontractor** within any consecutive six (6) year period determining that such **Contractor** or **Subcontractor** has willfully failed to pay the prevailing rate of wages or to provide supplements in accordance with the Labor Law and this Article 37.4, whether such failures were concurrent or consecutive and whether or not such final determinations concerning separate public works projects are rendered simultaneously, such **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the second final determination. If the final determination involves the falsification of payroll records or the kickback of wages or supplements, the **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the first final determination.

37.4.4(c) Labor Law Section 220, as amended, provides that the **Contractor** or **Subcontractor** found to have violated this Article 37.4 may be directed to make payment of wages or supplements including interest found to be due, and the **Contractor** or **Subcontractor** may be directed to make payment of a further sum as a civil penalty in an amount not exceeding twenty-five (25%) percent of the total amount found to be due.

37.5 The **Contractor** and its **Subcontractors** shall within ten (10) **Days** after mailing of a Notice of Award or written order, post in prominent and conspicuous places in each and every plant, factory, building, and structure where employees of the **Contractor** and its **Subcontractors** engaged in the performance of this **Contract** are employed, notices furnished by the **City**, in relation to prevailing wages and supplements, minimum wages, and other stipulations contained in Sections 220 and 220-h of the Labor Law, and the **Contractor** and its **Subcontractors** shall continue to keep such notices posted in such prominent and conspicuous places until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services required to be furnished or rendered under this **Contract**.

37.6 The **Contractor** shall strictly comply with all of the provisions of Articles 37.6.1 through 37.6.5, and provide for all workers, laborers or mechanics in its employ, the following:

37.6.1 Notices Posted At **Site**: Post, in a location designated by the **City**, schedules of prevailing wages and supplements for this **Project**, a copy of all re-determinations of such schedules for the **Project**, the Workers' Compensation **Law** Section 51 notice, all other notices required by **Law** to be posted at the **Site**, the **City** notice that this **Project** is a public works project on which each worker is entitled to receive the prevailing wages and supplements for the occupation at which he or she is working, and all other notices which the **City** directs the **Contractor** to post. The **Contractor** shall provide a surface for such notices which is satisfactory to the **City**. The **Contractor** shall maintain and keep current such notices in a legible manner and shall replace any notice or schedule which is damaged, defaced, illegible or removed for any reason. The **Contractor** shall post such notices before commencing any **Work** on the **Site** and shall maintain such notices until all **Work** on the **Site** is complete; and

37.6.2 Daily **Site** Sign-in Sheets: Maintain daily **Site** sign-in sheets, and require that **Subcontractors** maintain daily **Site** sign-in sheets for its employees, which include blank spaces for an employee's name to be both printed and signed, job title, date started and Social Security number, the time the employee began work and the time the employee left

work, until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services to be furnished or rendered under this **Contract** unless exception is granted by the **Comptroller** upon application by the **Agency**. In the alternative, subject to the approval of the **CCPO**, the **Contractor** and **Subcontractor** may maintain an electronic or biometric sign-in system, which provides the information required by this Article 37.6.2; and

37.6.3 Individual Employee Information Notices: Distribute a notice to each worker, laborer or mechanic employed under this **Contract**, in a form provided by the **Agency**, that this **Project** is a public works project on which each worker, laborer or mechanic is entitled to receive the prevailing rate of wages and supplements for the occupation at which he or she is working. If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, such notice shall also include a statement that each worker, laborer or mechanic must be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration. Such notice shall be distributed to each worker before he or she starts performing any **Work** of this **Contract** and with the first paycheck after July first of each year. "Worker, laborer or mechanic" includes employees of the **Contractor** and all **Subcontractors** and all employees of suppliers entering the **Site**. At the time of distribution, the **Contractor** shall have each worker, laborer or mechanic sign a statement, in a form provided by the **Agency**, certifying that the worker has received the notice required by this Article 37.6.3, which signed statement shall be maintained with the payroll records required by this **Contract**; and

37.6.3(a) The **Contractor** and each **Subcontractor** shall notify each worker, laborer or mechanic employed under this **Contract** in writing of the prevailing rate of wages for their particular job classification. Such notification shall be given to every worker, laborer, and mechanic on their first pay stub and with every pay stub thereafter; and

37.6.4 **Site Laminated Identification Badges**: The **Contractor** shall provide laminated identification badges which include a photograph of the worker's, laborer's or mechanic's face and indicate the worker's, laborer's or mechanic's name, trade, employer's name, and employment starting date (month/day/year). Further, the **Contractor** shall require as a condition of employment on the **Site**, that each and every worker, laborer or mechanic wear the laminated identification badge at all times and that it may be seen by any representative of the **City**. The **Commissioner** may grant a written waiver from the requirement that the laminated identification badge include a photograph if the **Contractor** demonstrates that the identity of an individual wearing a laminated identification badge can be easily verified by another method; and

37.6.5 **Language Other Than English Used On Site**: Provide the **ACCO** notice when three (3) or more employees (worker and/or laborer and/or mechanic) on the **Site**, at any time, speak a language other than English. The **ACCO** will then provide the **Contractor** the notices described in Article 37.6.1 in that language or languages as may be required. The **Contractor** is responsible for all distributions under this Article 37; and

37.6.6 **Provision of Records**: The **Contractor** and **Subcontractor(s)** shall produce within five (5) **Days** on the **Site** of the **Work** and upon a written order of the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, or the **Comptroller**, such records as are required to be kept by this Article 37.6; and

37.6.7 The **Contractor** and **Subcontractor(s)** shall pay employees by check or direct deposit. If this **Contract** is for an amount greater than one million (\$1,000,000) dollars, checks issued by the **Contractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**). For any subcontract for an amount greater than seven hundred fifty thousand (\$750,000) dollars, checks issued by a **Subcontractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**); and

37.6.8 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 37.6.1 through 37.6.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.7 The **Contractor** and its **Subcontractors** shall keep such employment and payroll records as are required by Section 220 of the Labor Law. The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of this Article 37.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.8 At the time the **Contractor** makes application for each partial payment and for final payment, the **Contractor** shall submit to the **Commissioner** a written payroll certification, in the form provided by this **Contract**, of compliance with the prevailing wage, minimum wage, and other provisions and stipulations required by Labor Law Section 220 and of compliance with the training requirements of Labor Law Section 220-h set forth in Article 35.2. This certification of compliance shall be a condition precedent to payment and no payment shall be made to the **Contractor** unless and until each such certification shall have been submitted to and received by the **Commissioner**.

37.9 This **Contract** is executed by the **Contractor** with the express warranty and representation that the **Contractor** is not disqualified under the provisions of Section 220 of the Labor Law from the award of the **Contract**.

37.10 Any breach or violation of any of the foregoing shall be deemed a breach or violation of a material provision of this **Contract**, and grounds for cancellation thereof by the **City**.

ARTICLE 38. PAYROLL REPORTS

38.1 The **Contractor** and its **Subcontractor(s)** shall maintain on the **Site** during the performance of the **Work** the original payrolls or transcripts thereof which the **Contractor** and its **Subcontractor(s)** are required to maintain and shall submit such original payrolls or transcripts, subscribed and affirmed by it as true, within thirty (30) **Days** after issuance of its first payroll, and every thirty (30) **Days** thereafter, pursuant to Labor Law Section 220(3-a)(a)(iii). The **Contractor** and **Subcontractor(s)** shall submit such original payrolls or transcripts along with each and every payment requisition. If payment requisitions are not submitted at least once a month, the **Contractor** and its **Subcontractor(s)** shall submit original payrolls and transcripts both along with its payment requisitions and independently of its payment requisitions.

38.2 The **Contractor** shall maintain payrolls or transcripts thereof for six (6) years from the date of completion of the **Work** on this **Contract**. If such payrolls and transcripts are maintained outside of New York City after the completion of the **Work** and their production is required pursuant to this Article 38, the **Contractor** shall produce such records in New York City upon request by the **City**.

38.3 The **Contractor** and **Subcontractor(s)** shall comply with any written order, direction, or request made by the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law**

Investigator(s), or the **Comptroller**, to provide to the requesting party any of the following information and/or records within five (5) **Days** of such written order, direction, or request:

38.3.1 Such original payrolls or transcripts thereof subscribed and affirmed by it as true and the statements signed by each worker pursuant to this Chapter VIII; and/or

38.3.2 Attendance sheets for each **Day** on which any employee of the **Contractor** and/or any of the **Subcontractor(s)** performed **Work** on the **Site**, which attendance sheet shall be in a form acceptable to the **Agency** and shall provide information acceptable to the **Agency** to identify each such employee; and/or

38.3.3 Any other information to satisfy the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)** or the **Comptroller**, that this Chapter VIII and the Labor Law, as to the hours of employment and prevailing rates of wages and/or supplemental benefits, are being observed.

38.4 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 38.1 and/or 38.2 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

ARTICLE 39. DUST HAZARDS

39.1 Should a harmful dust hazard be created in performing the **Work** of this **Contract**, for the elimination of which appliances or methods have been approved by the Board of Standards and Appeals of the City of New York, such appliances and methods shall be installed, maintained, and effectively operated during the continuance of such harmful dust hazard. Failure to comply with this provision after notice shall make this **Contract** voidable at the sole discretion of the **City**.

CHAPTER IX: PARTIAL AND FINAL PAYMENTS

ARTICLE 40. CONTRACT PRICE

40.1 The **City** shall pay, and the **Contractor** agrees to accept, in full consideration for the **Contractor's** performance of the **Work** subject to the terms and conditions hereof, the lump sum price or unit prices for which this **Contract** was awarded, plus the amount required to be paid for any **Extra Work** ordered by the **Commissioner** under Article 25, less credit for any **Work** omitted pursuant to Article 29.

ARTICLE 41. BID BREAKDOWN ON LUMP SUM

41.1 Within fifteen (15) **Days** after the commencement date specified in the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Resident Engineer**, the **Contractor** shall submit to the **Resident Engineer** a breakdown of its bid price, or of lump sums bid for items of the **Contract**, showing the various operations to be performed under the **Contract**, as directed in the progress schedule required under Article 9, and the value of each of such operations, the total of such items to equal the lump sum price bid. Said breakdown must be approved in writing by the **Resident Engineer**.

41.2 No partial payment will be approved until the **Contractor** submits a bid breakdown that is acceptable to the **Resident Engineer**.

41.3 The **Contractor** shall also submit such other information relating to the bid breakdown as directed by the **Resident Engineer**. Thereafter, the breakdown may be used only for checking the **Contractor's** applications for partial payments hereunder, but shall not be binding upon the **City**, the **Commissioner**, or the **Engineer** for any purpose whatsoever.

ARTICLE 42. PARTIAL PAYMENTS

42.1 From time to time as the **Work** progresses satisfactorily, but not more often than once each calendar month (except where the **Commissioner** approves in writing the submission of invoices on a more frequent basis and for invoices relating to **Work** performed pursuant to a change order), the **Contractor** may submit to the **Engineer** a requisition for a partial payment in the prescribed form, which shall contain an estimate of the quantity and the fair value of the **Work** done during the payment period.

42.2 Partial payments may be made for materials, fixtures, and equipment in advance of their actual incorporation in the **Work**, as the **Commissioner** may approve, and upon the terms and conditions set forth in the General Conditions.

42.3 The **Contractor** shall also submit to the **Commissioner** in connection with every application for partial payment a verified statement in the form prescribed by the **Comptroller** setting forth the information required under Labor Law Section 220-a.

42.4 Within thirty (30) **Days** after receipt of a satisfactory payment application, and within sixty (60) **Days** after receipt of a satisfactory payment application in relation to **Work** performed pursuant to a change order, the **Engineer** will prepare and certify, and the **Commissioner** will approve, a voucher for a partial payment in the amount of such approved estimate, less any and all deductions authorized to be made by the **Commissioner** under the terms of this **Contract** or by **Law**.

ARTICLE 43. PROMPT PAYMENT

43.1 The Prompt Payment provisions of the **PPB** Rules in effect at the time of the bid will be applicable to payments made under this **Contract**. The provisions require the payment to the **Contractor** of interest on payments made after the required payment date, except as set forth in the **PPB** Rules.

43.2 The **Contractor** shall submit a proper invoice to receive payment, except where the **Contract** provides that the **Contractor** will be paid at predetermined intervals without having to submit an invoice for each scheduled payment.

43.3 Determination of interest due will be made in accordance with the **PPB** Rules.

43.4 If the **Contractor** is paid interest, the proportionate share(s) of that interest shall be forwarded by the **Contractor** to its **Subcontractor(s)**.

43.5 The **Contractor** shall pay each **Subcontractor** or **Materialman** not later than seven (7) **Days** after receipt of payment out of amounts paid to the **Contractor** by the **City** for **Work** performed by the **Subcontractor** or **Materialman** under this **Contract**.

43.5.1 If **Contractor** fails to make any payment to any **Subcontractor** or **Materialman** within seven (7) **Days** after receipt of payment by the **City** pursuant to this Article 43.5,

then the **Contractor** shall pay interest on amounts due to such **Subcontractor** or **Materialman** at the rate of interest in effect on the date such payment is made by the **Contractor** computed in accordance with Section 756-b (1)(b) of the New York General Business Law. Accrual of interest shall commence on the **Day** immediately following the expiration of the seventh **Day** following receipt of payment by the **Contractor** from the **City** and shall end on the date on which payment is made.

43.6 The **Contractor** shall include in each of its subcontracts a provision requiring each **Subcontractor** to make payment to each of its **Subcontractors** or **Materialmen** for **Work** performed under this **Contract** in the same manner and within the same time period set forth above.

ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT

44.1 The **Contractor** shall submit with the **Substantial Completion** requisition:

44.1.1 A final verified statement of any pending Article 27 disputes in accordance with the **PPB** Rules and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay.

44.1.1(a) With respect to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City** Corporation Counsel shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 44.1.1(a) is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor** upon acceptance of the **Substantial Completion** payment pursuant to this Article 44, will have waived any such claims.

44.1.2 A **Final Approved Punch List**.

44.1.3 Where required, a request for an extension of time to achieve **Substantial Completion** or final extension of time.

44.2 The **Commissioner** shall issue a voucher calling for payment of any part or all of the balance due for **Work** performed under the **Contract**, including monies retained under Article 21, less any and all deductions authorized to be made by the **Commissioner**, under this **Contract** or by **Law**, and less twice the amount the **Commissioner** considers necessary to ensure the completion of the balance of the **Work** by the **Contractor**. Such a payment shall be considered a partial and not a final payment. No **Substantial Completion** payment shall be made under this Article 44 where the **Contractor** failed to complete the **Work** within the time fixed for such completion in the Schedule A of the General Conditions, or within the time to which completion may have been extended, until an extension or extensions of time for the completion of **Work** have been acted upon pursuant to Article 13.

44.3 No further partial payments shall be made to the **Contractor** after **Substantial Completion**, except the **Substantial Completion** payment and payment pursuant to any **Contractor's** requisition that were properly filed with the **Commissioner** prior to the date of **Substantial Completion**; however, the **Commissioner** may grant a waiver for further partial payments after the date of **Substantial Completion** to permit payments for change order **Work** and/or release of retainage and deposits pursuant to Articles 21 and 24. Such waiver shall be in writing.

44.4 The **Contractor** acknowledges that nothing contained in this Article 44 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 45. FINAL PAYMENT

45.1 After completion and **Final Acceptance** of the **Work**, the **Contractor** shall submit all required certificates and documents, together with a requisition for the balance claimed to be due under the **Contract**, less the amount authorized to be retained for maintenance under Article 24. Such submission shall be within 90 days of the date of the **Commissioner's** written determination of **Final Acceptance**, or within such additional time as may be granted by the **Commissioner** in writing. If the **Contractor** fails to submit all required certificates and documents within the time allowed, no payment of the balance claimed shall be made to the **Contractor** and the **Contractor** shall be deemed to have forfeited its right to payment of any balance claimed. A verified statement similar to that required in connection with applications for partial payments shall also be submitted to the **Commissioner**.

45.2 Amended Verified Statement of Claims: The **Contractor** shall also submit with the final requisition any amendments to the final verified statement of any pending dispute resolution procedures in accordance with the **PPB** Rules and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) that have occurred subsequent to **Substantial Completion**, setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each such item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay. With reference to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City** Corporation Counsel shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 45.2, is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor**, upon acceptance of the Final Payment pursuant to Article 46, will have waived any such claims.

45.3 Preparation of Final Voucher: Upon determining the balance due hereunder other than on account of claims, the **Engineer** will prepare and certify, for the **Commissioner's** approval, a voucher for final payment in that amount less any and all deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**. In the case of a lump sum **Contract**, the **Commissioner** shall certify the voucher for final payment within thirty (30) **Days** from the date of completion and acceptance of the **Work**, provided all requests for extensions of time have been acted upon.

45.3.1 All prior certificates and vouchers upon which partial payments were made, being merely estimates made to enable the **Contractor** to prosecute the **Work** more advantageously, shall be subject to correction in the final voucher, and the certification of the **Engineer**

thereon and the approval of the **Commissioner** thereof, shall be conditions precedent to the right of the **Contractor** to receive any money hereunder. Such final voucher shall be binding and conclusive upon the **Contractor**.

45.3.2 Payment pursuant to such final voucher, less any deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**, shall constitute the final payment, and shall be made by the **Comptroller** within thirty (30) **Days** after the filing of such voucher in his/her office.

45.4 The **Contractor** acknowledges that nothing contained in this Article 45 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT

46.1 The acceptance by the **Contractor**, or by anyone claiming by or through it, of the final payment, whether such payment be made pursuant to any judgment of any court, or otherwise, shall constitute and operate as a release of the **City** from any and all claims of and liability to the **Contractor** for anything heretofore done or furnished for the **Contractor** relating to or arising out of this **Contract** and the **Work** done hereunder, and for any prior act, neglect or default on the part of the **City** or any of its officials, agents or employees, excepting only a claim against the **City** for the amounts deducted or retained in accordance with the terms and provisions of this **Contract** or by **Law**, and excepting any claims, not otherwise waived, or any pending dispute resolution procedures which are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45.

46.2 The **Contractor** is warned that the execution by it of a release, in connection with the acceptance of the final payment, containing language purporting to reserve claims other than those herein specifically excepted from the operation of this Article 46, or those for amounts deducted by the **Commissioner** from the final requisition or from the final payment as certified by the **Engineer** and approved by the **Commissioner**, shall not be effective to reserve such claims, anything stated to the **Contractor** orally or in writing by any official, agent or employee of the **City** to the contrary notwithstanding.

46.3 Should the **Contractor** refuse to accept the final payment as tendered by the **Comptroller**, it shall constitute a waiver of any right to interest thereon.

46.4 The **Contractor**, however, shall not be barred by this Article 46 from commencing an action for breach of **Contract** to the extent permitted by **Law** and by the terms of the **Contract** for any claims that are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45 or that arose after submission of the final payment requisition, provided that a detailed and verified statement of claim is served upon the contracting **Agency** and **Comptroller** not later than forty (40) **Days** after the making of such final payment by electronic funds transfer (EFT) or the mailing of such final payment. The statement shall specify the items upon which the claim will be based and any such claim shall be limited to such items.

ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION

47.1 All works of art, including paintings, mural decorations, stained glass, statues, bas-reliefs, and other sculptures, monuments, fountains, arches, and other structures of a permanent character intended for ornament or commemoration, and every design of the same to be used in the performance of this **Contract**, and the design of all bridges, approaches, buildings, gates, fences, lamps, or structures to be erected, pursuant

to the terms of this **Contract**, shall be submitted to the Art Commission, d/b/a the Public Design Commission of the City of New York, and shall be approved by the Public Design Commission prior to the erection or placing in position of the same. The final payment shall not become due or payable under this **Contract** unless and until the Public Design Commission shall certify that the design for the **Work** herein contracted for has been approved by the said Public Design Commission, and that the same has been executed in substantial accordance with the design so approved, pursuant to the provisions of Chapter 37, Section 854 of the **City** Charter, as amended.

CHAPTER X: CONTRACTOR'S DEFAULT

ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT

48.1 In addition to those instances specifically referred to in other Articles herein, the **Commissioner** shall have the right to declare the **Contractor** in default of this **Contract** if:

48.1.1 The **Contractor** fails to commence **Work** when notified to do so by the **Commissioner**; or if

48.1.2 The **Contractor** shall abandon the **Work**; or if

48.1.3 The **Contractor** shall refuse to proceed with the **Work** when and as directed by the **Commissioner**; or if

48.1.4 The **Contractor** shall, without just cause, reduce its working force to a number which, if maintained, would be insufficient, in the opinion of the **Commissioner**, to complete the **Work** in accordance with the progress schedule; or if

48.1.5 The **Contractor** shall fail or refuse to increase sufficiently such working force when ordered to do so by the **Commissioner**; or if

48.1.6 The **Contractor** shall sublet, assign, transfer, convert or otherwise dispose of this **Contract** other than as herein specified; or sell or assign a majority interest in the **Contractor**; or if

48.1.7 The **Contractor** fails to secure and maintain all required insurance; or if

48.1.8 A receiver or receivers are appointed to take charge of the **Contractor's** property or affairs; or if

48.1.9 The **Commissioner** shall be of the opinion that the **Contractor** is or has been unnecessarily or unreasonably or willfully delaying the performance and completion of the **Work**, or the award of necessary subcontracts, or the placing of necessary material and equipment orders; or if

48.1.10 The **Commissioner** shall be of the opinion that the **Contractor** is or has been willfully or in bad faith violating any of the provisions of this **Contract**; or if

48.1.11 The **Commissioner** shall be of the opinion that the **Work** cannot be completed within the time herein provided therefor or within the time to which such completion may have been extended; provided, however, that the impossibility of timely completion is, in the

Commissioner's opinion, attributable to conditions within the **Contractor's** control; or if

48.1.12 The **Work** is not completed within the time herein provided therefor or within the time to which the **Contractor** may be entitled to have such completion extended; or if

48.1.13 Any statement or representation of the **Contractor** in the **Contract** or in any document submitted by the **Contractor** with respect to the **Work**, the **Project**, or the **Contract** (or for purposes of securing the **Contract**) was untrue or incorrect when made; or if

48.1.14 The **Contractor** or any of its officers, directors, partners, five (5%) percent shareholders, principals, or other persons substantially involved in its activities, commits any of the acts or omissions specified as the grounds for debarment in the **PPB** Rules.

48.2 Before the **Commissioner** shall exercise his/her right to declare the **Contractor** in default, the **Commissioner** shall give the **Contractor** an opportunity to be heard, upon not less than two (2) **Days'** notice.

ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT

49.1 The right to declare the **Contractor** in default for any of the grounds specified or referred to in Article 48 shall be exercised by sending the **Contractor** a notice, signed by the **Commissioner**, setting forth the ground or grounds upon which such default is declared (hereinafter referred to as a "Notice of Default").

49.2 The **Commissioner's** determination that the **Contractor** is in default shall be conclusive, final, and binding on the parties and such a finding shall preclude the **Contractor** from commencing a plenary action for any damages relating to the **Contract**. If the **Contractor** protests the determination of the **Commissioner**, the **Contractor** may commence an action in a court of competent jurisdiction of the State of New York under Article 78 of the New York Civil Practice Law and Rules.

ARTICLE 50. QUITTING THE SITE

50.1 Upon receipt of such notice the **Contractor** shall immediately discontinue all further operations under this **Contract** and shall immediately quit the **Site**, leaving untouched all plant, materials, equipment, tools, and supplies then on the **Site**.

ARTICLE 51. COMPLETION OF THE WORK

51.1 The **Commissioner**, after declaring the **Contractor** in default, may then have the **Work** completed by such means and in such manner, by contract with or without public letting, or otherwise, as he/she may deem advisable, utilizing for such purpose such of the **Contractor's** plant, materials, equipment, tools, and supplies remaining on the **Site**, and also such **Subcontractors**, as he/she may deem advisable.

51.2 After such completion, the **Commissioner** shall make a certificate stating the expense incurred in such completion, which shall include the cost of re-letting and also the total amount of liquidated damages (at the rate provided for in the **Contract**) from the date when the **Work** should have been completed by the **Contractor** in accordance with the terms hereof to the date of actual completion of the **Work**. Such certificate shall be binding and conclusive upon the **Contractor**, its sureties, and any person claiming under the **Contractor**, as to the amount thereof.

51.3 The expense of such completion, including any and all related and incidental costs, as so certified by the **Commissioner**, and any liquidated damages assessed against the **Contractor**, shall be charged against and deducted out of monies which are earned by the **Contractor** prior to the date of default. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

ARTICLE 52. PARTIAL DEFAULT

52.1 In case the **Commissioner** shall declare the **Contractor** in default as to a part of the **Work** only, the **Contractor** shall discontinue such part, shall continue performing the remainder of the **Work** in strict conformity with the terms of this **Contract**, and shall in no way hinder or interfere with any **Other Contractor(s)** or persons whom the **Commissioner** may engage to complete the **Work** as to which the **Contractor** was declared in default.

52.2 The provisions of this Chapter relating to declaring the **Contractor** in default as to the entire **Work** shall be equally applicable to a declaration of partial default, except that the **Commissioner** shall be entitled to utilize for completion of the part of the **Work** as to which the **Contractor** was declared in default only such plant, materials, equipment, tools, and supplies as had been previously used by the **Contractor** on such part.

ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK

53.1 In completing the whole or any part of the **Work** under the provisions of this Chapter X, the **Commissioner** shall have the power to depart from or change or vary the terms and provisions of this **Contract**, provided, however, that such departure, change or variation is made for the purpose of reducing the time or expense of such completion. Such departure, change or variation, even to the extent of accepting a lesser or different performance, shall not affect the conclusiveness of the **Commissioner's** certificate of the cost of completion referred to in Article 51, nor shall it constitute a defense to an action to recover the amount by which such certificate exceeds the amount which would have been payable to the **Contractor** hereunder but for its default.

ARTICLE 54. OTHER REMEDIES

54.1 In addition to the right to declare the **Contractor** in default pursuant to this Chapter X, the **Commissioner** shall have the absolute right, in his/her sole discretion and without a hearing, to complete or cause to be completed in the same manner as described in Articles 51 and 53, any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List**. A written notice of the exercise of this right shall be sent to the **Contractor** who shall immediately quit the **Site** in accordance with the provisions of Article 50.

54.2 The expense of completion permitted under Article 54.1, including any and all related and incidental costs, as so certified by the **Commissioner**, shall be charged against and deducted out of monies which have been earned by the **Contractor** prior to the date of the exercise of the right set forth in Article 54.1; the balance of such monies, if any, subject to the other provisions of this **Contract**, to be paid to the **Contractor** without interest after such completion. Should the expense of such completion, as certified by

the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

54.3 The previous provisions of this Chapter X shall be in addition to any and all other remedies available under **Law** or in equity.

54.4 The exercise by the **City** of any remedy set forth herein shall not be deemed a waiver by the **City** of any other legal or equitable remedy contained in this **Contract** or provided under **Law**.

CHAPTER XI: MISCELLANEOUS PROVISIONS

ARTICLE 55. CONTRACTOR'S WARRANTIES

55.1 In consideration of, and to induce, the award of this **Contract** to the **Contractor**, the **Contractor** represents and warrants:

55.1.1 That it is financially solvent, sufficiently experienced and competent to perform the **Work**; and

55.1.2 That the facts stated in its bid and the information given by it pursuant to the Information for Bidders is true and correct in all respects; and

55.1.3 That it has read and complied with all requirements set forth in the **Contract**.

ARTICLE 56. CLAIMS AND ACTIONS THEREON

56.1 Any claim, that is not subject to dispute resolution under the **PPB** Rules or this **Contract**, against the **City** for damages for breach of **Contract** shall not be made or asserted in any action, unless the **Contractor** shall have strictly complied with all requirements relating to the giving of notice and of information with respect to such claims, as herein before provided.

56.2 Nor shall any action be instituted or maintained on any such claims unless such action is commenced within six (6) months after **Substantial Completion**; except that:

56.2.1 Any claims arising out of events occurring after **Substantial Completion** and before **Final Acceptance** of the **Work** shall be asserted within six (6) months of **Final Acceptance** of the **Work**;

56.2.2 If the **Commissioner** exercises his/her right to complete or cause to complete any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List** pursuant to Article 54, any such action shall be commenced within six (6) months from the date the **Commissioner** notifies the **Contractor** in writing that he/she has exercised such right. Any claims for monies deducted, retained or withheld under the provisions of this **Contract** shall be asserted within six (6) months after the date when such monies otherwise become due and payable hereunder; and

56.2.3 If the **Commissioner** exercises his/her right to terminate the **Contract** pursuant to Article 64, any such action shall be commenced within six (6) months of the date the **Commissioner** exercises said right.

ARTICLE 57. INFRINGEMENT

57.1 The **Contractor** shall be solely responsible for and shall defend, indemnify, and hold the **City** harmless from any and all claims (even if the allegations of the lawsuit are without merit) and judgments for damages and from costs and expenses to which the **City** may be subject to or which it may suffer or incur allegedly arising out of or in connection with any infringement by the **Contractor** of any copyright, trade secrets, trademark or patent rights or any other property or personal right of any third party by the **Contractor** and/or its **Subcontractors** in the performance or completion of the **Work**. Insofar as the facts or **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent permitted by **Law**.

ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES

58.1 No claim whatsoever shall be made by the **Contractor** against any official, agent or employee of the **City** for, or on account of, anything done or omitted to be done in connection with this **Contract**.

ARTICLE 59. SERVICE OF NOTICES

59.1 The **Contractor** hereby designates the business address, fax number, and email address specified in its bid, as the place where all notices, directions or other communications to the **Contractor** may be delivered, or to which they may be mailed. Any notice, direction, or communication from either party to the other shall be in writing and shall be deemed to have been given when (i) delivered personally; (ii) sent by certified mail, return receipt requested; (iii) delivered by overnight or same day courier service in a properly addressed envelope with confirmation; or (iv) sent by fax or email and, unless receipt of the fax or e-mail is acknowledged by the recipient by fax or e-mail, deposited in a post office box regularly maintained by the United States Postal Service in a properly addressed, postage pre-paid envelope.

59.2 **Contractor's** notice address, email address, or fax number may be changed at any time by an instrument in writing, executed and acknowledged by the **Contractor**, and delivered to the **Commissioner**.

59.3 Nothing herein contained shall, however, be deemed to preclude or render inoperative the service of any notice, direction or other communication upon the **Contractor** personally, or, if the **Contractor** is a corporation, upon any officer thereof.

ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT

60.1 If this **Contract** contains any unlawful provision not an essential part of the **Contract** and which shall not appear to have been a controlling or material inducement to the making thereof, the same shall be deemed of no effect and shall, upon notice by either party, be deemed stricken from the **Contract** without affecting the binding force of the remainder.

ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED

61.1 It is the intent and understanding of the parties to this **Contract** that each and every provision of **Law** required to be inserted in this **Contract** shall be and is inserted herein. Furthermore, it is hereby stipulated that every such provision is to be deemed to be inserted herein, and if, through mistake or otherwise, any such provision is not inserted, or is not inserted in correct form, then this **Contract** shall forthwith upon the application of either party be amended by such insertion so as to comply strictly with the **Law** and without prejudice to the rights of either party hereunder.

ARTICLE 62. TAX EXEMPTION

62.1 The **City** is exempt from payment of Federal, State, and local taxes, including sales and compensating use taxes of the State of New York and its cities and counties on all tangible personal property sold to the **City** pursuant to the provisions of this **Contract**. These taxes are not to be included in bids. However, this exemption does not apply to tools, machinery, equipment or other property leased by or to the **Contractor**, **Subcontractor** or **Materialman** or to tangible personal property which, even though it is consumed, is not incorporated into the completed **Work** (consumable supplies) and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**. The **Contractor** and its **Subcontractors** and **Materialmen** shall be responsible for and pay any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property and upon all such consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**.

62.2 The **Contractor** agrees to sell and the **City** agrees to purchase all tangible personal property, other than consumable supplies and other tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**, that is required, necessary or proper for or incidental to the construction of the **Project** covered by this **Contract**. The sum paid under this **Contract** for such tangible personal property shall be in full payment and consideration for the sale of such tangible personal property.

62.2.1 The **Contractor** agrees to construct the **Project** and to perform all **Work**, labor and services rendered, necessary, proper or incidental thereto for the sum shown in the bid for the performance of such **Work**, labor, and services, and the sum so paid pursuant to this **Contract** for such **Work**, labor, and services, shall be in full consideration for the performance by the **Contractor** of all its duties and obligations under this **Contract** in connection with said **Work**, labor, and services.

62.3 20 NYCRR Section 541.3(d) provides that a **Contractor's** purchases of tangible personal property that is either incorporated into real property owned by a governmental entity or purchased for and sold to a governmental entity are exempt from sales and use tax. The **City** shall not pay sales tax for any such tangible personal property that it purchases from the **Contractor** pursuant to the **Contract**. With respect to such tangible personal property, the **Contractor**, at the request of the **City**, shall furnish to the **City** such bills of sale and other instruments as may be required by the **City**, properly executed, acknowledged and delivered assuring to the **City** title to such tangible personal property, free of liens and/or encumbrances, and the **Contractor** shall mark or otherwise identify all such tangible personal property as the property of the **City**.

62.4 Title to all tangible personal property to be sold by the **Contractor** to the **City** pursuant to the provisions of the **Contract** shall immediately vest in and become the sole property of the **City** upon delivery of such tangible personal property to the **Site**. Notwithstanding such transfer of title, the **Contractor** shall

have the full and continuing responsibility to install such tangible personal property in accordance with the provisions of this **Contract**, protect it, maintain it in a proper condition and forthwith repair, replace and make good any damage thereto, theft or disappearance thereof, and furnish additional tangible personal property in place of any that may be lost, stolen or rendered unusable, without cost to the **City**, until such time as the **Work** covered by the **Contract** is fully accepted by the **City**. Such transfer of title shall in no way affect any of the **Contractor's** obligations hereunder. In the event that, after title has passed to the **City**, any of the tangible personal property is rejected as being defective or otherwise unsatisfactory, title to all such tangible personal property shall be deemed to have been transferred back to the **Contractor**.

62.5 The purchase by **Subcontractors** or **Materialmen** of tangible personal property to be sold hereunder shall be a purchase or procurement for resale to the **Contractor** (either directly or through other **Subcontractors**) and therefore not subject to the aforesaid sales and compensating use taxes, provided that the subcontracts and purchase agreements provide for the resale of such tangible personal property and that such subcontracts and purchase agreements are in a form similar to this **Contract** with respect to the separation of the sale of consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work** from the **Work** and labor, services, and any other matters to be provided, and provided further that the subcontracts and purchase agreements provide separate prices for tangible personal property and all other services and matters. Such separation shall actually be followed in practice, including the separation of payments for tangible personal property from the payments for other **Work** and labor and other things to be provided.

62.6 The **Contractor** and its **Subcontractors** and **Materialmen** shall furnish a **Contractor** Exempt Purchase Certificate to all persons, firms or corporations from which they purchase tangible personal property for the performance of the **Work** covered by this **Contract**.

62.7 In the event any of the provisions of this Article 62 shall be deemed to be in conflict with any other provisions of this **Contract** or create any ambiguity, then the provisions of this Article 62 shall control.

ARTICLE 63. INVESTIGATION(S) CLAUSE

63.1 The parties to this **Contract** agree to cooperate fully and faithfully with any investigation, audit or inquiry conducted by a United States, a State of New York (State) or a **City** governmental agency or authority that is empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath, or conducted by the Inspector General of a governmental agency that is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit or license that is the subject of the investigation, audit or inquiry.

63.2 If any person who has been advised that his/her statement, and any information from such statement, will not be used against him/her in any subsequent criminal proceeding refuses to testify before a grand jury or other governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath concerning the award of or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision or public authority thereof, or the Port Authority of New York and New Jersey, or any local development corporation within the **City**, or any public benefit corporation organized under the **Laws** of the State of New York, or;

63.3 If any person refuses to testify for a reason other than the assertion of his/her privilege against self incrimination in an investigation, audit or inquiry conducted by a **City** or State governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to take testimony under oath, or by the Inspector General of the governmental agency that is a party in interest in, and is

seeking testimony concerning the award of, or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision thereof or any local development corporation within the **City**, then;

63.4 The **Commissioner** whose **Agency** is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit, or license shall convene a hearing, upon not less than five (5) **Days**' written notice to the parties involved to determine if any penalties should attach for the failure of a person to testify.

63.5 If any non-governmental party to the hearing requests an adjournment, the **Commissioner** who convened the hearing may, upon granting the adjournment, suspend any contract, lease, permit, or license, pending the final determination pursuant to Article 63.7 without the **City** incurring any penalty or damages for delay or otherwise.

63.6 The penalties which may attach after a final determination by the **Commissioner** may include but shall not exceed:

63.6.1 The disqualification for a period not to exceed five (5) years from the date of an adverse determination for any person, or any entity of which such person was a member at the time the testimony was sought, from submitting bids for, or transacting business with, or entering into or obtaining any contract, lease, permit or license with or from the **City**; and/or

63.6.2 The cancellation or termination of any and all such existing **City** contracts, leases, permits or licenses that the refusal to testify concerns and that have not been assigned as permitted under this **Contract**, nor the proceeds of which pledged, to an unaffiliated and unrelated institutional lender for fair value prior to the issuance of the notice scheduling the hearing, without the **City** incurring any penalty or damages on account of such cancellation or termination; monies lawfully due for goods delivered, work done, rentals, or fees accrued prior to the cancellation or termination shall be paid by the **City**.

63.7 The **Commissioner** shall consider and address in reaching his/her determination and in assessing an appropriate penalty the factors in Articles 63.7.1 and 63.7.2. The **Commissioner** may also consider, if relevant and appropriate, the criteria established in Articles 63.7.3 and 63.7.4, in addition to any other information which may be relevant and appropriate:

63.7.1 The party's good faith endeavors or lack thereof to cooperate fully and faithfully with any governmental investigation or audit, including but not limited to the discipline, discharge, or disassociation of any person failing to testify, the production of accurate and complete books and records, and the forthcoming testimony of all other members, agents, assignees or fiduciaries whose testimony is sought.

63.7.2 The relationship of the person who refused to testify to any entity that is a party to the hearing, including but not limited to, whether the person whose testimony is sought has an ownership interest in the entity and/or the degree of authority and responsibility the person has within the entity.

63.7.3 The nexus of the testimony sought to the subject entity and its contracts, leases, permits or licenses with the **City**.

63.7.4 The effect a penalty may have on an unaffiliated and unrelated party or entity that has a significant interest in an entity subject to penalties under Article 63.6, provided that the party

or entity has given actual notice to the **Commissioner** upon the acquisition of the interest, or at the hearing called for in Article 63.4, gives notice and proves that such interest was previously acquired. Under either circumstance the party or entity shall present evidence at the hearing demonstrating the potential adverse impact a penalty will have on such person or entity.

63.8 Definitions:

63.8.1 The term “license” or “permit” as used in this Article 63 shall be defined as a license, permit, franchise or concession not granted as a matter of right.

63.8.2 The term “person” as used in this Article 63 shall be defined as any natural person doing business alone or associated with another person or entity as a partner, director, officer, principal or employee.

63.8.3 The term “entity” as used in this Article 63 shall be defined as any firm, partnership, corporation, association, joint venture, or person that receives monies, benefits, licenses, leases, or permits from or through the **City** or otherwise transacts business with the **City**.

63.8.4 The term “member” as used in this Article 63 shall be defined as any person associated with another person or entity as a partner, director, officer, principal or employee.

63.9 In addition to and notwithstanding any other provision of this **Contract**, the **Commissioner** may in his/her sole discretion terminate this **Contract** upon not less than three (3) **Days**’ written notice in the event the **Contractor** fails to promptly report in writing to the **Commissioner** of the Department of Investigations (“DOI”) of the **City** any solicitation of money, goods, requests for future employment or other benefit or thing of value, by or on behalf of any employee of the **City** or other person, firm, corporation or entity for any purpose which may be related to the procurement or obtaining of this **Contract** by the **Contractor**, or affecting the performance of this **Contract**.

ARTICLE 64. TERMINATION BY THE CITY

64.1 In addition to termination pursuant to any other article of this **Contract**, the **Commissioner** may, at any time, terminate this **Contract** by written notice to the **Contractor**. In the event of termination, the **Contractor** shall, upon receipt of such notice, unless otherwise directed by the **Commissioner**:

64.1.1 Stop **Work** on the date specified in the notice;

64.1.2 Take such action as may be necessary for the protection and preservation of the **City**’s materials and property;

64.1.3 Cancel all cancelable orders for material and equipment;

64.1.4 Assign to the **City** and deliver to the **Site** or another location designated by the **Commissioner**, any non-cancelable orders for material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract** and not incorporated in the **Work**;

64.1.5 Take no action which will increase the amounts payable by the **City** under this
64.1.5 **Contract**.

64.2 In the event of termination by the **City** pursuant to this Article 64, payment to the **Contractor** shall be in accordance with Articles 64.2.1, 64.2.2 or 64.2.3, to the extent that each respective article applies.

64.2.1 Lump Sum Contracts or Items: On all lump sum **Contracts**, or on lump sum items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.1(a) and 64.2.1(b), less all payments previously made pursuant to this **Contract**. On lump sum **Contracts** only, the **City** will also pay the **Contractor** an additional sum as provided in Article 64.2.1(c).

64.2.1(a) For **Work** completed prior to the notice of termination, the **Contractor** shall be paid a pro rata portion of the lump sum bid amount, plus approved change orders, based upon the percent completion of the **Work**, as determined by the **Commissioner**. For the purpose of determining the pro rata portion of the lump sum bid amount to which the **Contractor** is entitled, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be dispositive. The **Commissioner's** determination hereunder shall be final, binding, and conclusive.

64.2.1(b) For non-cancelable material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated in the **Work**, the **Contractor** shall be paid the lesser of the following, less salvage value:

64.2.1(b)(i) The Direct Cost, as defined in Article 64.2.4; or

64.2.1(b)(ii) The fair and reasonable value, if less than Direct Cost, of such material and equipment, plus necessary and reasonable delivery costs.

64.2.1(b)(iii) In addition, the **Contractor** shall be paid five (5%) percent of the amount described in Article 64.2.1(b)(i) or Article 64.2.1(b)(ii), whichever applies.

64.2.1(c) Except as otherwise provided in Article 64.2.1(d), on all lump sum **Contracts**, the **Contractor** shall be paid the percentage indicated below applied to the difference between the total lump sum bid amount and the total of all payments made prior to the notice of termination plus all payments allowed pursuant to Articles 64.2.1(a) and 64.2.1(b):

64.2.1(c)(i) Five (5%) percent of the first five million (\$5,000,000) dollars; and

64.2.1(c)(ii) Three (3%) percent of any amount between five million (\$5,000,000) dollars and fifteen million (\$15,000,000) dollars; plus

64.2.1(c)(iii) One (1%) percent of any amount over fifteen million (\$15,000,000) dollars.

64.2.1(d) In the event the **City** terminates a lump sum **Contract** pursuant to this Article 64 within ninety (90) **Days** after registration of the **Contract** with the **Comptroller**, the **Contractor** shall be paid one (1%) percent of the difference between the lump sum bid amount and the total of all payments made pursuant to this Article 64.2.

64.2.2 Unit Price Contracts or Items: On all unit price **Contracts**, or on unit price items in a

Contract, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.2(a) and 64.2.2(b), less all payments previously made pursuant to this **Contract**:

64.2.2(a) For all completed units, the unit price stated in the **Contract**, and

64.2.2(b) For units that have been ordered but are only partially completed, the **Contractor** will be paid:

64.2.2(b)(i) A pro rata portion of the unit price stated in the **Contract** based upon the percent completion of the unit and

64.2.2(b)(ii) For non-cancelable material and equipment, payment will be made pursuant to Article 64.2.1(b).

64.2.3 Time and Materials Contracts or Items Based on Time and Material Records: On all **Contracts** or items in a **Contract** where payment for the **Work** is based on time and material records, the **Contractor** shall be paid in accordance with Article 26, less all payments previously made pursuant to this **Contract**.

64.2.4 Direct Costs: Direct Costs as used in this Article 64.2 shall mean:

64.2.4(a) The actual purchase price of material and equipment, plus necessary and reasonable delivery costs,

64.2.4(b) The actual cost of labor involved in construction and installation at the **Site**, and

64.2.4(c) The actual cost of necessary bonds and insurance purchased pursuant to requirements of this **Contract** less any amounts that have been or should be refunded by the **Contractor's** sureties or insurance carriers.

64.2.4(d) Direct Costs shall not include overhead.

64.3 In no event shall any payments under this Article 64 exceed the **Contract** price for such items.

64.4 All payments pursuant to Article 64 shall be in the nature of liquidated damages and shall be accepted by the **Contractor** in full satisfaction of all claims against the **City**.

64.5 The **City** may deduct or set off against any sums due and payable pursuant to this Article 64, any deductions authorized by this **Contract** or by **Law** (including but not limited to liquidated damages) and any claims it may have against the **Contractor**. The **City's** exercise of the right to terminate the **Contract** pursuant to this Article 64 shall not impair or otherwise effect the **City's** right to assert any claims it may have against the **Contractor** in a plenary action.

64.6 Where the **Work** covered by the **Contract** has been substantially completed, as determined in writing by the **Commissioner**, termination of the **Work** shall be handled as an omission of **Work** pursuant to Articles 29 and 33, in which case a change order will be issued to reflect an appropriate reduction in the **Contract** sum, or if the amount is determined after final payment, such amount shall be paid by the **Contractor**.

ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE

65.1 This **Contract** shall be deemed to be executed in the **City** regardless of the domicile of the **Contractor**, and shall be governed by and construed in accordance with the **Laws** of the State of New York and the **Laws** of the United States, where applicable.

65.2 The parties agree that any and all claims asserted against the **City** arising under this **Contract** or related thereto shall be heard and determined in the courts of the State of New York (“New York State Courts”) located in the **City** and County of New York. To effect this **Contract** and intent, the **Contractor** agrees:

65.2.1 If the **City** initiates any action against the **Contractor** in Federal court or in a New York State Court, service of process may be made on the **Contractor** either in person, wherever such **Contractor** may be found, or by registered mail addressed to the **Contractor** at its address as set forth in this **Contract**, or to such other address as the **Contractor** may provide to the **City** in writing; and

65.2.2 With respect to any action between the **City** and the **Contractor** in a New York State Court, the **Contractor** hereby expressly waives and relinquishes any rights it might otherwise have:

65.2.2(a) To move to dismiss on grounds of forum non conveniens;

65.2.2(b) To remove to Federal Court; and

65.2.2(c) To move for a change of venue to a New York State Court outside New York County.

65.2.3 With respect to any action brought by the **City** against the **Contractor** in a Federal Court located in the **City**, the **Contractor** expressly waives and relinquishes any right it might otherwise have to move to transfer the action to a Federal Court outside the **City**.

65.2.4 If the **Contractor** commences any action against the **City** in a court located other than in the **City** and County of New York, upon request of the **City**, the **Contractor** shall either consent to a transfer of the action to a New York State Court of competent jurisdiction located in the **City** and County of New York or, if the Court where the action is initially brought will not or cannot transfer the action, the **Contractor** shall consent to dismiss such action without prejudice and may thereafter reinstate the action in a New York State Court of competent jurisdiction in New York County.

65.3 If any provision(s) of this Article 65 is held unenforceable for any reason, each and all other provision(s) shall nevertheless remain in full force and effect.

ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT

66.1 The **Contractor** agrees that neither the **Contractor** nor any substantially owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the Federal Export Administration Act of 1979, as amended, or the regulations of the United States Department of Commerce (Commerce Department) promulgated thereunder.

66.2 Upon the final determination by the Commerce Department or any other agency of the United States as to, or conviction of the **Contractor** or a substantially-owned affiliated company thereof for participation in an international boycott in violation of the provisions of the Export Administration Act of 1979, as amended, or the regulations promulgated thereunder, the **Comptroller** may, at his/her option, render forfeit and void this **Contract**.

66.3 The **Contractor** shall comply in all respects, with the provisions of Section 6-114 of the Administrative Code and the rules and regulations issued by the **Comptroller** thereunder.

ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM

67.1 This **Contract** is subject to the requirements of Section 6-108.1 of the Administrative Code and regulations promulgated thereunder. No construction contract shall be awarded unless and until these requirements have been complied with in their entirety; however, compliance with this Article 67 is not required if the Agency sets Subcontractor Participation Goals for Minority- and Women-Owned Business Enterprises (M/WBEs).

67.2 Unless specifically waived by the **Commissioner** with the approval of the Division of Economic and Financial Opportunity of the **City** Department of Business Services, if any portion of the **Contract** is subcontracted, not less than ten (10%) percent of the total dollar amount of the **Contract** shall be awarded to locally based enterprises (LBEs); except that where less than ten (10%) percent of the total dollar amount of the **Contract** is subcontracted, such lesser percentage shall be so awarded.

67.3 The **Contractor** shall not require performance and payment bonds from LBE **Subcontractors**.

67.4 If the **Contractor** has indicated prior to award that no **Work** will be subcontracted, no **Work** shall be subcontracted without the prior approval of the **Commissioner**, which shall be granted only if the **Contractor** makes a good faith effort beginning at least six (6) weeks before the **Work** is to be performed to obtain LBE **Subcontractors** to perform the **Work**.

67.5 If the **Contractor** has not identified sufficient LBE **Subcontractors** prior to award, it shall sign a letter of compliance stating that it complies with Section 6-108.1 of the Administrative Code, recognizes that achieving the LBE requirement is a condition of its **Contract**, and shall submit documentation demonstrating its good faith efforts to obtain LBEs. After award, the **Contractor** shall begin to solicit LBE's to perform subcontracted **Work** at least six (6) weeks before the date such **Work** is to be performed and shall demonstrate that a good faith effort has been made to obtain LBEs on each subcontract until it meets the required percentage.

67.6 Failure of the **Contractor** to comply with the requirements of Section 6-108.1 of the Administrative Code and the regulations promulgated thereunder shall constitute a material breach of this **Contract**. Remedy for such breach may include the imposition of any or all of the following sanctions:

67.6.1 Reducing the **Contractor's** compensation by an amount equal to the dollar value of the percentage of the LBE subcontracting requirement not complied with;

67.6.2 Declaring the **Contractor** in default;

67.6.3 If the **Contractor** is an LBE, de-certifying and declaring the **Contractor** ineligible to participate in the LBE program for a period of up to three (3) years.

ARTICLE 68. ANTITRUST

68.1 The **Contractor** hereby assigns, sells, and transfers to the **City** all right, title, and interest in and to any claims and causes of action arising under the antitrust **Laws** of New York State or of the United States relating to the particular goods or services purchased or procured by the **City** under this **Contract**.

ARTICLE 69. MacBRIDE PRINCIPLES PROVISIONS

69.1 Notice To All Prospective **Contractors**:

69.1.1 Local Law No. 34 of 1991 became effective on September 10, 1991 and added Section 6-115.1 of the Administrative Code. The local **Law** provides for certain restrictions on **City Contracts** to express the opposition of the people of the **City** to employment discrimination practices in Northern Ireland to promote freedom of work-place opportunity.

69.1.2 Pursuant to Section 6-115.1, prospective **Contractors** for **Contracts** to provide goods or services involving an expenditure of an amount greater than ten thousand (\$10,000.) dollars, or for construction involving an amount greater than fifteen thousand (\$15,000.) dollars, are asked to sign a rider in which they covenant and represent, as a material condition of their **Contract**, that any business operations in Northern Ireland conducted by the **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** will be conducted in accordance with the MacBride Principles of nondiscrimination in employment.

69.1.3 Prospective **Contractors** are not required to agree to these conditions. However, in the case of **Contracts** let by competitive sealed bidding, whenever the lowest responsible bidder has not agreed to stipulate to the conditions set forth in this notice and another bidder who has agreed to stipulate to such conditions has submitted a bid within five (5%) percent of the lowest responsible bid for a **Contract** to supply goods, services or construction of comparable quality, the **Agency** shall refer such bids to the Mayor, the Speaker or other officials, as appropriate, who may determine, in accordance with applicable **Law**, that it is in the best interest of the **City** that the **Contract** be awarded to other than the lowest responsible pursuant to Section 313(b)(2) of the **City** Charter.

69.1.4 In the case of **Contracts** let by other than competitive sealed bidding, if a prospective **Contractor** does not agree to these conditions, no **Agency**, elected official or the **City** Council shall award the **Contract** to that bidder unless the **Agency** seeking to use the goods, services or construction certifies in writing that the **Contract** is necessary for the **Agency** to perform its functions and there is no other responsible **Contractor** who will supply goods, services or construction of comparable quality at a comparable price.

69.2 In accordance with Section 6-115.1 of the Administrative Code, the **Contractor** stipulates that such **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** either:

69.2.1 Have no business operations in Northern Ireland, or

69.2.2 Shall take lawful steps in good faith to conduct any business operations they have in

Northern Ireland in accordance with the MacBride Principles, and shall permit independent monitoring of their compliance with such principles.

69.3 For purposes of this Article, the following terms shall have the following meanings:

69.3.1 “MacBride Principles” shall mean those principles relating to nondiscrimination in employment and freedom of work-place opportunity which require employers doing business in Northern Ireland to:

69.3.1(a) increase the representation of individuals from under-represented religious groups in the workforce, including managerial, supervisory, administrative, clerical and technical jobs;

69.3.1(b) take steps to promote adequate security for the protection of employees from under-represented religious groups both at the work-place and while traveling to and from **Work**;

69.3.1(c) ban provocative religious or political emblems from the workplace;

69.3.1(d) publicly advertise all job openings and make special recruitment efforts to attract applicants from under-represented religious groups;

69.3.1(e) establish layoff, recall, and termination procedures which do not in practice favor a particular religious group;

69.3.1(f) abolish all job reservations, apprenticeship restrictions and different employment criteria which discriminate on the basis of religion;

69.3.1(g) develop training programs that will prepare substantial numbers of current employees from under-represented religious groups for skilled jobs, including the expansion of existing programs and the creation of new programs to train, upgrade, and improve the skills of workers from under-represented religious groups;

69.3.1(h) establish procedures to assess, identify, and actively recruit employees from under-represented religious groups with potential for further advancement; and

69.3.1(i) appoint a senior management staff member to oversee affirmative action efforts and develop a timetable to ensure their full implementation.

69.4 The **Contractor** agrees that the covenants and representations in Article 69.2 are material conditions to this **Contract**. In the event the **Agency** receives information that the **Contractor** who made the stipulation required by this Article 69 is in violation thereof, the **Agency** shall review such information and give the **Contractor** an opportunity to respond. If the **Agency** finds that a violation has occurred, the **Agency** shall have the right to declare the **Contractor** in default and/or terminate this **Contract** for cause and procure supplies, services or **Work** from another source in the manner the **Agency** deems proper. In the event of such termination, the **Contractor** shall pay to the **Agency**, or the **Agency** in its sole discretion may withhold from any amounts otherwise payable to the **Contractor**, the difference between the **Contract** price for the uncompleted portion of this **Contract** and the cost to the **Agency** of completing performance of this **Contract** either itself or by engaging another **Contractor** or **Contractors**. In the case of a requirement **Contract**, the **Contractor** shall be liable for such difference in price for the entire amount of supplies required by the **Agency** for the uncompleted term of **Contractor's Contract**. In the case of a construction **Contract**, the **Agency** shall also have the right to hold the **Contractor** in partial or total default in

accordance with the default provisions of this **Contract**, and/or may seek debarment or suspension of the **Contractor**. The rights and remedies of the **Agency** hereunder shall be in addition to, and not in lieu of, any rights and remedies the **Agency** has pursuant to this **Contract** or by operation of **Law**.

ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB

70.1 The **Contractor** shall electronically file all alteration type-2 and alteration type-3 applications via the New York City Development Hub Web site, except applications for the following types of minor alterations: enlargements, curb cuts, legalizations, fire alarms, builders pavement plans, and jobs filed on Landmark Preservation Commission calendared properties. All such filings must be professionally certified. Information about electronic filing via the New York City Development Hub is available on the **City** Department of Buildings Web site at www.nyc.gov/buildings.

ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS

71.1 Tropical hardwoods, as defined in Section 165 of the New York State Finance Law (Finance Law), shall not be utilized in the performance of this **Contract** except as expressly permitted by Section 165 of the Finance Law.

ARTICLE 72. CONFLICTS OF INTEREST

72.1 Section 2604 of the **City** Charter and other related provisions of the **City** Charter, the Administrative Code, and the Penal Law are applicable under the terms of this **Contract** in relation to conflicts of interest and shall be extended to **Subcontractors** authorized to perform **Work**, labor and services pursuant to this **Contract** and further, it shall be the duty and responsibility of the **Contractor** to so inform its respective **Subcontractors**. Notice is hereby given that, under certain circumstances, penalties may be invoked against the donor as well as the recipient of any form of valuable gift.

ARTICLE 73. MERGER CLAUSE

73.1 The written **Contract** herein, contains all the terms and conditions agreed upon by the parties hereto, and no other agreement, oral or otherwise, regarding the subject matter of this **Contract** shall be deemed to exist or to bind any of the parties hereto, or to vary any of the terms contained herein.

ARTICLE 74. STATEMENT OF WORK

74.1 The **Contractor** shall furnish all labor and materials and perform all **Work** in strict accordance with the **Specifications** and **Addenda** thereto, numbered as shown in Schedule A.

ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR

75.1 The **City** will pay and the **Contractor** will accept in full consideration for the performance of the **Contract**, subject to additions and deductions as provided herein, the total sum shown in Schedule A, this said sum being the amount at which the **Contract** was awarded to the **Contractor** at a public letting thereof, based upon the **Contractor's** bid for the **Contract**.

ARTICLE 76. ELECTRONIC FUNDS TRANSFER

76.1 In accordance with Section 6-107.1 of the Administrative Code, the **Contractor** agrees to accept payments under this **Contract** from the **City** by electronic funds transfer (EFT). An EFT is any transfer of funds, other than a transaction originated by check, draft or similar paper instrument, which is initiated through an electronic terminal, telephonic instrument or computer or magnetic tape so as to order, instruct or authorize a financial institution to debit or credit an account. Prior to the first payment made under this **Contract**, the **Contractor** shall designate one financial institution or other authorized payment agent and shall complete the attached "EFT Vendor Payment Enrollment Form" in order to provide the Commissioner of the **City** Department of Finance with information necessary for the **Contractor** to receive electronic funds transfer payments through a designated financial institution or authorized payment agent. The crediting of the amount of a payment to the appropriate account on the books of a financial institution or other authorized payment agent designated by the **Contractor** shall constitute full satisfaction by the **City** for the amount of the payment under this **Contract**. The account information supplied by the **Contractor** to facilitate the electronic funds transfer shall remain confidential to the fullest extent provided by **Law**.

76.2 The **Commissioner** may waive the application of the requirements of this Article 76 to payments on contracts entered into pursuant to Section 315 of the **City** Charter. In addition, the Commissioner of the Department of Finance and the Comptroller may jointly issue standards pursuant to which the **Agency** may waive the requirements of this Article 76 for payments in the following circumstances: (i) for individuals or classes of individuals for whom compliance imposes a hardship; (ii) for classifications or types of checks; or (iii) in other circumstances as may be necessary in the interest of the **City**.

ARTICLE 77. RECORDS RETENTION

77.1 The **Contractor** agrees to retain all books, records, and other documents relevant to this **Contract** for six years after the final payment or termination of this **Contract**, whichever is later. **City**, state, and federal auditors and any other persons duly authorized by the **City** shall have full access to and the right to examine any such books, records, and other documents during the retention period.

ARTICLE 78. EXAMINATION AND VIEWING OF SITE, CONSIDERATION OF OTHER SOURCES OF INFORMATION AND CHANGED SITE CONDITIONS

78.1 Pre-Bidding (Investigation) Viewing of Site – Bidders must carefully view and examine the **Site** of the proposed **Work**, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions and hazards on, about or above the **Site** relating to or affecting in any way the performance of the **Work** to be done under the **Contract** that were or should have been known by a reasonably prudent bidder. To arrange a date for visiting the **Site**,

bidders are to contact the **Agency** contact person specified in the bid documents.

78.2 Should the **Contractor** encounter during the progress of the Work site conditions or environmental hazards at the **Site** materially differing from any shown on the **Contract Drawings** or indicated in the **Specifications** or such conditions or environmental hazards as could not reasonably have been anticipated by the **Contractor**, which conditions or hazards will materially affect the cost of the **Work** to be done under the **Contract**, the attention of the **Commissioner** must be called immediately to such conditions or hazards before they are disturbed. The **Commissioner** shall thereupon promptly investigate the conditions or hazards. If the **Commissioner** finds that they do so materially differ, and that they could not have been reasonably anticipated by the **Contractor**, the **Contract** may be modified with the **Commissioner's** written approval.

ARTICLE 79. PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS ENTERPRISES IN CITY PROCUREMENT

ARTICLE I. M/WBE PROGRAM

Section 6-129 of the Administrative Code of the City of New York ("Section 6-129") establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan") and are detailed below.

The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129.

References to MBEs or WBEs shall also include such businesses certified pursuant to the executive law where credit is required by section 311 of the New York City Charter or other provision of law.

Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts.

Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A: PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The MBE and/or WBE Participation Goals established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part 1 to this Contract (see Page 1, Line 1 Total Participation Goals) or will be set forth on Schedule B, Part 1 to Task Orders issued pursuant to this Contract, as applicable.

The Participation Goals represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with DSBS as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If Participation Goals have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the Participation Goals, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If Participation Goals have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant Participation Goal, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant Participation Goal. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If Participation Goals have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part 2 (see Pages 1-2) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end; as well as the name, addresses, and telephone numbers of the M/WBE subcontractors if required by the solicitation; and (d) the prospective contractor's required certification and affirmations. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the Participation Goals, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE Participation Goals, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part 2 (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the Participation Goals that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) Participation Goals on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If Participation Goals have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part 2 (see Pages 1-2) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end; as well as the name, addresses, and telephone numbers of the M/WBE subcontractors if required by the solicitation; and (d) the prospective contractor's required certification and affirmations. The contractor must engage in good faith efforts to meet the Participation Goals as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART 2). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART 3). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi- year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the Participation Goals. Such certification must occur prior to the firms' commencement of work. A list of city-certified MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6451, or by visiting or writing DSBS at One Liberty Plaza ., New York, New York, 10006, 11th floor. Eligible firms that have not yet

been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's M/WBE Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its M/WBE Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an M/WBE Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the Participation Goals should be modified.

10. Pre-award waiver of the Participation Goals. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the Participation Goals in accordance with Section 6-129, which requests that Agency change one or more Participation Goals on the grounds that the Participation Goals are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the Participation Goals, a bidder, proposer, or contractor, as applicable, must complete Part 3 of Schedule B **and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing by email at MWBEModification@ddc.nyc.gov. Full or partial waiver requests that are received later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due may be rejected as untimely.** Bidders, proposers, or contractors, as applicable, who have submitted timely requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the Participation Goals are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the Participation Goals to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited

to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the Participation Goals. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of M/WBE Utilization Plan. (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission. The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the Participation Goals. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;
- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the Participation Goals when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If the Contractor was required to identify in its bid or proposal the MBEs and/or WBEs they intended to use in connection with the performance of the Contract or Task Order, substitutions to the identified firms may only be made with the approval of the Agency, which shall only be given when the Contractor has proposed to use a firm that would satisfy the Participation Goals to the same extent as the firm previously identified, unless the Agency determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts. In making such determination, the Agency shall require evidence of the

efforts listed in Section 11(a) above, as applicable, along with any other relevant factors.

13. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the Participation Goals, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

14. If Participation Goals have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

15. If Participation Goals have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

The Contractor shall take notice that, if this solicitation requires the establishment of a M/WBE Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the M/WBE Utilization Plan.

1. Pursuant to DSBS rules, construction contracts that include a requirement for a M/WBE Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.

2. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.

3. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).

4. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required Participation Goals.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.

2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129

or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any M/WBE Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.

3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any M/WBE Utilization Plan, Agency may determine that one of the following actions should be taken:

- (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
- (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
- (c) making a finding that the Contractor is in default of the Contract;
- (d) terminating the Contract;
- (e) declaring the Contractor to be in breach of Contract;
- (f) withholding payment or reimbursement;
- (g) determining not to renew the Contract;
- (h) assessing actual and consequential damages;
- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an M/WBE Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its Participation Goals contained in its M/WBE Utilization Plan or the Participation Goals as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the Participation Goals and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the Participation Goals, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its M/WBE Utilization Plan shall be a factor in the evaluation of

its performance. Whenever Agency determines that a Contractor's compliance with an M/WBE Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in PASSPort as caution data.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

LABOR LAW ARTICLE 8 - NYC PUBLIC WORKS

Workers, Laborers and Mechanics employed on a public work project must receive not less than the prevailing rate of wage and benefits for the classification of work performed by each upon such public work. Pursuant to New York Labor Law Article 8 the Comptroller of the City of New York has promulgated this schedule solely for Workers, Laborers and Mechanics engaged by private contractors on New York City public work projects. Prevailing rates are required to be annexed to and form part of the public work contract pursuant to Labor Law section 220 (3).

This schedule is a compilation of separate determinations of the prevailing rate of wage and supplements made by the Comptroller for each trade classification listed herein pursuant to Labor Law section 220 (5). The source of the wage and supplement rates, whether a collective bargaining agreement, survey data or other, is listed at the end of each classification.

Agency Chief Contracting Officers should contact the Bureau of Labor Law's Classification Unit with any questions concerning trade classifications, prevailing rates or prevailing practices with respect to procurement on New York City public work contracts. Contractors are advised to review the Comptroller's Prevailing Wage Schedule before bidding on public work contracts. Contractors with questions concerning trade classifications, prevailing rates or prevailing practices with respect to public work contracts in the procurement stage must contact the contracting agency responsible for the procurement.

Any error as to compensation under the prevailing wage law or other information as to trade classification, made by the contracting agency in the contract documents or in any other communication, will not preclude a finding against the contractor of prevailing wage violation.

Any questions concerning trade classifications, prevailing rates or prevailing practices on New York City public work contracts that have already been awarded may be directed to the Bureau of Labor Law's Classification Unit by calling (212) 669-4443. All callers must have the agency name and contract registration number available when calling with questions on public work contracts. Please direct all other compliance issues to: laborlaw@comptroller.nyc.gov or Bureau of Labor Law, Attn: Paul Brumlik, Office of the Comptroller, 1 Centre Street, Room 651, New York, N.Y. 10007.

Pursuant to Labor Law § 220 (3-a) (a), the appropriate schedule of prevailing wages and benefits must be posted in a prominent and accessible place at all public work sites along with the Construction Poster provided on our web site at comptroller.nyc.gov/wages. In addition, covered employees must be given the appropriate schedule of prevailing wages and benefits along with the Worker Notice provided on our web site at the time the public work project begins, and with the first paycheck to each such employee after July first of each year.

This schedule is applicable to work performed during the effective period, unless otherwise noted. Changes to this schedule are published on our web site comptroller.nyc.gov/wages. Contractors must pay the wages and supplements in effect when the worker, laborer, mechanic performs the work. Preliminary schedules for future one-year periods appear in the City Record on or about June 1 each succeeding year. Final schedules appear on or about July 1 in the City Record and on our web site comptroller.nyc.gov/wages.

Prevailing rates and ratios for apprentices are published in the Construction Apprentice Prevailing Wage Schedule. Pursuant to Labor Law § 220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant, registered with the

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

New York State Department of Labor, may be paid at the apprentice rates. Apprentices who are not so registered must be paid as journey persons.

New York City public work projects awarded pursuant to a Project Labor Agreement (“PLA”) in accordance with Labor Law section 222 may have different labor standards for shift, premium and overtime work. Please refer to the PLA’s pre-negotiated labor agreements for wage and benefit rates applicable to work performed outside of the regular workday. More information is available at the Mayor’s Office of Contract Services (MOCS) web page at:

<https://www1.nyc.gov/site/mocs/legal-forms/project-labor-agreements.page>

All the provisions of Labor Law Article 8 remain applicable to PLA work including, but not limited to, the enforcement of prevailing wage requirements by the Comptroller in accordance with the trade classifications in this schedule; however, we will enforce shift, premium, overtime and other non-standard rates as they appear in a project’s pre-negotiated labor agreement.

In order to meet their obligation to provide prevailing supplemental benefits to each covered employee, employers must either:

- 1) Provide bona fide fringe benefits which cost the employer no less than the prevailing supplemental benefits rate; or
- 2) Supplement the employee’s hourly wage by an amount no less than the prevailing supplemental benefits rate; or
- 3) Provide a combination of bona fide fringe benefits and wage supplements which cost the employer no less than the prevailing supplemental benefits rate in total.

Although prevailing wage laws do not require employers to provide bona fide fringe benefits (as opposed to wage supplements) to their employees, other laws may. For example, the Employee Retirement Income Security Act, 29 U.S.C. § 1001 et seq., the Patient Protection and Affordable Care Act, 42 U.S.C. § 18001 et seq., and the New York City Paid Sick Leave Law, N.Y.C. Admin. Code § 20-911 et seq., require certain employers to provide certain benefits to their employees. Labor agreements to which employers are a party may also require certain benefits. The Comptroller’s Office does not enforce these laws or agreements.

Employers must provide prevailing supplemental benefits at the straight time rate for each hour worked unless otherwise noted in the classification.

Paid Holidays, Vacation and Sick Leave when listed must be paid or provided in addition to the prevailing hourly supplemental benefit rate.

For more information, please refer to the Comptroller’s Prevailing Wage Law Regulations in Title 44 of the Rules of the City of New York, Chapter 2, available at comptroller.nyc.gov/wages.

Paul Brumlik
Director of Classifications
Bureau of Labor Law

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER	5
BLASTER.....	5
BOILERMAKER.....	6
BRICKLAYER	7
CARPENTER - BUILDING COMMERCIAL	8
CARPENTER - HEAVY CONSTRUCTION WORK.....	9
CARPENTER - HIGH RISE CONCRETE FORMS.....	10
CARPENTER - SIDEWALK SHED, SCAFFOLD AND HOIST	11
CARPENTER - WOOD WATER STORAGE TANK	12
CEMENT & CONCRETE WORKER	13
CEMENT MASON	14
CORE DRILLER.....	15
DERRICKPERSON AND RIGGER	16
DIVER.....	17
DOCKBUILDER - PILE DRIVER	18
DRIVER: TRUCK (TEAMSTER).....	19
ELECTRICIAN	21
ELECTRICIAN - ALARM TECHNICIAN	24
ELECTRICIAN-STREET LIGHTING WORKER.....	25
ELEVATOR CONSTRUCTOR.....	26
ELEVATOR REPAIR & MAINTENANCE	27
ENGINEER.....	28
ENGINEER - CITY SURVEYOR AND CONSULTANT.....	33
ENGINEER - FIELD (BUILDING CONSTRUCTION).....	34
ENGINEER - FIELD (HEAVY CONSTRUCTION).....	35
ENGINEER - FIELD (STEEL ERECTION).....	36
ENGINEER - OPERATING.....	37
FLAGGER.....	45
FLOOR COVERER	45
GLAZIER.....	46
GLAZIER - REPAIR & MAINTENANCE	47
HAZARDOUS MATERIAL HANDLER.....	48
HEAT AND FROST INSULATOR.....	48
HOUSE WRECKER	49
IRON WORKER - ORNAMENTAL.....	50
IRON WORKER - STRUCTURAL	51
LABORER – HEAVY & HIGHWAY	52
LABORER - PAVER & ROADBUILDER.....	53
LABORER - PAVER & ROADBUILDER LINE STRIPING (ROADWAY).....	55

**OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE**

LANDSCAPING	56
MARBLE MECHANIC	58
MASON TENDER	59
MASON TENDER (INTERIOR DEMOLITION WORKER)	60
METALLIC LATHER	61
MILLWRIGHT	61
MOSAIC MECHANIC	62
PAINTER	63
PAINTER - BRIDGE & STRUCTURAL STEEL	64
PAINTER - METAL POLISHER	65
PAINTER - SIGN	67
PAPERHANGER	68
PAVER AND ROADBUILDER.....	68
PLASTERER.....	69
PLASTERER - TENDER.....	69
PLUMBER.....	70
PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)	71
PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION).....	72
PLUMBER: PUMP & TANK.....	73
POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER.....	74
ROOFER	74
SHEET METAL WORKER	75
SHEET METAL WORKER - SPECIALTY	76
SHIPYARD WORKER	77
SIGN ERECTOR	79
STEAMFITTER	79
STEAMFITTER - REFRIGERATION AND AIR CONDITIONER.....	80
STONE MASON - SETTER.....	81
TAPER.....	82
TELECOMMUNICATION WORKER.....	83
TILE FINISHER	84
TILE LAYER - SETTER.....	85
TIMBERPERSON.....	86
TUNNEL WORKER.....	86
UTILITY LOCATOR.....	88
WELDER	90

PAYMENT BOND

Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 1)

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, Stalco Construction, Inc.

1316 Motor Parkway, Islandia, NY 11749

hereinafter referred to as the "Principal", and Endurance Assurance Corporation

1221 Avenue of the Americas, 18th Floor, New York, NY 10020

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

Nine Million Three Hundred Seventy Four Thousand Eight Hundred Eighty Five and 64/100 Dollars

(\$9,374,885.64) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade, General Contract (CT1)

Project ID:85024B0059-CO283TOIL

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so engaged who perform the work of laborers or mechanics at or in the vicinity of the site of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

PAYMENT BOND (Page 2)

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

PAYMENT BOND (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this 20th day of December, 2024.

(Seal)

Stalco Construction, Inc. (L.S.) Principal

By: Alan Narmas

(Seal)

Endurance Assurance Corporation Surety

By: Katherine Acosta
Katherine Acosta, Attorney-in-Fact

(Seal)

Surety

By: _____

(Seal)

Surety

By: _____

(Seal)

Surety

By: _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.


If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Suffolk ss:

On this 20th day of December 2024, before me personally came Alan Nahmias to me known, who, being by me duly sworn did depose and say that he resides at Fort Salonga, New York that he is the President of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

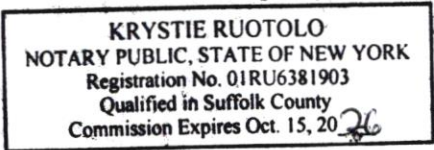

[Signature]
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.


Affix Acknowledgments and Justification of Sureties.

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF New York }

COUNTY OF Nassau }

On this DEC 20 2024, before me personally came Katherine Acosta to me known, who, being by me duly sworn, did depose and say; that he/she resides in Suffolk County, State of New York that he/she is the Attorney-In-Fact of the Endurance Assurance Corporation the corporation described in which executed the above instrument; that he/she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that is was so affixed by the Board of Directors of said corporation; and that he/she signed his/her name thereto by like order; and the affiant did further depose and say that the Superintendent of Insurance of the State of New York, has pursuant to Section 1111 of the Insurance Law of the State of New York, issued to Endurance Assurance Corporation (Surety) his/her certificate of qualification evidencing the qualification of said Company and its sufficiency under any law of the State of New York as surety and guarantor, and the propriety of accepting and approving is as such; and that such certificate has not been revoked.



Notary Public

NY acknowledgement

STEFANIE WEBER
Notary Public, State of New York
Registration No. 01WE6432035
Qualified in Nassau County
Commission Expires April 25, 2026

KNOW ALL BY THESE PRESENTS, that **Endurance Assurance Corporation, a Delaware corporation ('EAC'), Endurance American Insurance Company, a Delaware corporation ('EAIC'), Lexon Insurance Company, a Texas corporation ('LIC'), and/or Bond Safeguard Insurance Company, a South Dakota corporation ('BSIC'),** each, a "Company" and collectively, "**Sompo International,**" do hereby constitute and appoint: **Vincent A. Walsh, Louis J. Spina, Thomas Bean, Camille Maitland, Colette R. Chisholm, Dana Granice, Desiree Cardlin, George O. Brewster, Gerard S. Macholz, Karolyne Ramirez, Katherine Acosta, Lee Ferrucci, Michelle Wannamaker, Nelly Renchiwich, Peter F. Jones, Robert T. Pearson, Susan Lupski** as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**









Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:


RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.

IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.

<p>Endurance Assurance Corporation</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Endurance American Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Lexon Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Bond Safeguard Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 
--	---	--	---

ACKNOWLEDGEMENT

On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/she is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.


By: 
Amy Taylor, Notary Public – My Commission Expires 3/9/27



CERTIFICATE

- I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:
 - The original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
 - The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified: "RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO, and be it further RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
 - The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this 20th day of December, 2024

By: 
By: Daniel S. Lurie, Secretary

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.** The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website – <https://www.treasury.gov/resource-center/sanctions/SDN-List>. In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com

ENDURANCE ASSURANCE CORPORATION
Balance Sheet - Statutory - Basis
December 31, 2023

Assets:	
Bonds	\$ 8,840,516,134
Preferred stocks	14,559,098
Common stocks	2,502,912,644
Cash, cash equivalents, and short-term investments	547,214,855
Other invested assets	367,228,494
Receivables for securities	12,539,247
Total cash and invested assets	<u>12,284,970,472</u>
Agents' balances or uncollected premiums	3,639,295,463
Reinsurance recoverable on loss and loss adjustment expense payments	866,922,861
Funds held by or deposited with reinsured companies	116,173,785
Investment income due and accrued	59,715,007
Current federal and foreign income tax recoverable and interest thereon	765,086
Net deferred tax asset	194,151,100
Receivables from parent, subsidiaries and affiliates	36,069,122
Other assets	240,998,501
Total admitted assets	<u>\$ 17,439,061,397</u>
Liabilities:	
Loss and loss adjustment expenses	\$ 6,724,893,327
Reinsurance payable on paid loss and loss adjustment expenses	823,698,569
Commissions payable, contingent commissions and other similar charges	(1,662,639)
Other expenses	28,177,519
Taxes, licenses and fees (excluding federal and foreign income taxes)	27,009,410
Unearned premiums	2,749,272,278
Advanced Premium	10,285,830
Ceded reinsurance premiums payable	1,277,805,256
Funds held by company under reinsurance treaties	75,781,757
Amounts withheld or retained by company for account of others	732,081,177
Remittances and items not allocated	248,815,866
Provision for reinsurance	58,958,628
Payable to parent, subsidiaries and affiliates	172,805,784
Payable for securities	50,301,420
Other liabilities	70,939,621
Total liabilities	<u>13,049,163,803</u>
Capital and surplus:	
Common capital stock	5,000,000
Surplus notes	200,000,000
Gross paid in and contributed surplus	3,480,137,280
Unassigned funds (surplus)	703,291,886
Aggregate write-ins for special surplus funds	1,468,428
Total capital and surplus	<u>4,389,897,594</u>
Total liabilities and capital and surplus	<u>\$ 17,439,061,397</u>

I, Hana Entela, Treasurer of Endurance Assurance Corporation (the "Company") do hereby certify that to the best of my knowledge and belief, the foregoing is a full and true Statutory Statement of Admitted Assets, Liabilities, Capital and Surplus of the Company as of December 31, 2023 prepared in conformity with accounting practices prescribed or permitted by the State of Delaware Department of Insurance. The foregoing statement should not be taken as a complete statement of financial condition of the Company. Such a statement is available upon request at the Company's office located at 4 Manhattanville Road, Purchase, NY 10577.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of the Company at Purchase, New York.



 Hana Entela

Subscribed and sworn to before me this 5th day of March, 2024





PERFORMANCE BOND #2

Performance Bond #2 (4 pages): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 1)

PERFORMANCE BOND #2 KNOW ALL PERSONS BY THESE PRESENTS:

That we, Stalco Construction, Inc.

1316 Motor Parkway, Islandia, NY 11749

hereinafter referred to as the "Principal,"
and, Endurance Assurance Corporation

1221 Avenue of the Americas, 18th Floor, New York, NY 10020

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns in the penal sum of Nine Million Three Hundred Seventy Four Thousand Eight Hundred Eighty Five and 64/100 Dollars

(\$9,374,885.64) Dollars, lawful money of the United States for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade, General Contract (CT1)

Project ID:85024B0059-CO283TOIL

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making

good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

PERFORMANCE BOND #2 (Page 2)

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to either (1) pay the full amount of the above penal sum in complete discharge and exoneration of this bond and of all the liabilities of the Surety relating to this bond, or (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof. The Surety (Sureties) further agrees, at its option, either to tender the penal sum or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to commence and to complete all Work as provided herein.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any Work to be performed or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal.

PERFORMANCE BOND #2 (Page 3)

IN WITNESS WHEREOF, The Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this

_____ 20th _____ day of _____ December _____ 20 24 _____.

(Seal)

Stalco Construction, Inc. _____ (L.S.)

Principal Alan Nalnia

(Seal)

By: _____

Endurance Assurance Corporation
Surety

By: Katherine Acosta
Katherine Acosta, Attorney-in-Fact

Surety

By: _____

Surety

By: _____

Surety

By: _____

Surety

By: _____

Bond Premium Rate \$14.40/\$8.70/\$6.90/\$6.30/\$5.75

Bond Premium Cost \$68,381.00

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

ACKNOWLEDGMENT OF PRINCIPAL IF A CORPORATION

State of New York County of Suffolk ss:

On this 20th day of December, 20 2A before me personally came Alan Nahmias,

to me known, who, being by me duly sworn did depose and say that he resides at Fort Salonga, New York; that he/she is the president of the corporation described in and which executed the foregoing instrument; that he/she signed his/her name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.


Notary Public or Commissioner of Deeds.

KRYSTIE RUOTOLO
NOTARY PUBLIC, STATE OF NEW YORK
Registration No. 01RU6381903
Qualified in Suffolk County
Commission Expires Oct. 15, 20 26

ACKNOWLEDGMENT OF PRINCIPAL IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____,

to me known, who, being by me duly sworn did depose and say that he/she resides at _____; that he/she is _____ partner of _____, a limited/general partnership existing under the laws of the State of _____, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, 20 _____ before me personally came _____,

to me known, who, being by me duly sworn did depose and say that he/she resides at _____, and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.


Affix Acknowledgments and Justification of Sureties.

ACKNOWLEDGMENT OF SURETY COMPANY

STATE OF New York }

COUNTY OF Nassau }

On this DEC 20 2024, before me personally came Katherine Acosta to me known, who, being by me duly sworn, did depose and say; that he/she resides in Suffolk County, State of New York that he/she is the Attorney-In-Fact of the Endurance Assurance Corporation the corporation described in which executed the above instrument; that he/she knows the seal of said corporation; that the seal affixed to said instrument is such corporate seal; that is was so affixed by the Board of Directors of said corporation; and that he/she signed his/her name thereto by like order; and the affiant did further depose and say that the Superintendent of Insurance of the State of New York, has pursuant to Section 1111 of the Insurance Law of the State of New York, issued to Endurance Assurance Corporation (Surety) his/her certificate of qualification evidencing the qualification of said Company and its sufficiency under any law of the State of New York as surety and guarantor, and the propriety of accepting and approving is as such; and that such certificate has not been revoked.



Notary Public

NY acknowledgement

STEFANIE WEBER
Notary Public, State of New York
Registration No. 01WE6432035
Qualified in Nassau County
Commission Expires April 25, 2026

KNOW ALL BY THESE PRESENTS, that **Endurance Assurance Corporation, a Delaware corporation ('EAC'), Endurance American Insurance Company, a Delaware corporation ('EAIC'), Lexon Insurance Company, a Texas corporation ('LIC'), and/or Bond Safeguard Insurance Company, a South Dakota corporation ('BSIC'),** each, a "Company" and collectively, "**Sompo International,**" do hereby constitute and appoint: **Vincent A. Walsh, Louis J. Spina, Thomas Bean, Camille Maitland, Colette R. Chisholm, Dana Granice, Desiree Cardlin, George O. Brewster, Gerard S. Macholz, Karolynne Ramirez, Katherine Acosta, Lee Ferrucci, Michelle Wannamaker, Nelly Renchiwich, Peter F. Jones, Robert T. Pearson, Susan Lupski** as true and lawful Attorney(s)-In-Fact to make, execute, seal, and deliver for, and on its behalf as surety or co-surety; bonds and undertakings given for any and all purposes, also to execute and deliver on its behalf as aforesaid renewals, extensions, agreements, waivers, consents or stipulations relating to such bonds or undertakings provided, however, that no single bond or undertaking so made, executed and delivered shall obligate the Company for any portion of the penal sum thereof in excess of the sum of **One Hundred Million (\$100,000,000.00)**









Such bonds and undertakings for said purposes, when duly executed by said attorney(s)-in-fact, shall be binding upon the Company as fully and to the same extent as if signed by the President of the Company under its corporate seal attested by its Corporate Secretary.

This appointment is made under and by authority of certain resolutions adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC, a copy of which appears below under the heading entitled "Certificate".

This Power of Attorney is signed and sealed by facsimile under and by authority of the following resolution adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolution has not since been revoked, amended or repealed:


RESOLVED, that the signature of an individual named above and the seal of the Company may be affixed to any such power of attorney or any certificate relating thereto by facsimile, and any such power of attorney or certificate bearing such facsimile signature or seal shall be valid and binding upon the Company in the future with respect to any bond or undertaking to which it is attached.


IN WITNESS WHEREOF, each Company has caused this instrument to be signed by the following officers, and its corporate seal to be affixed this 25th day of May, 2023.

<p>Endurance Assurance Corporation</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Endurance American Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Lexon Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 	<p>Bond Safeguard Insurance Company</p>  <p>By: Richard Appel; SVP & Senior Counsel</p> 
--	---	--	---

ACKNOWLEDGEMENT

On this 25th day of May, 2023, before me, personally came the above signatories known to me, who being duly sworn, did depose and say that he/they is an officer of each of the Companies; and that he executed said instrument on behalf of each Company by authority of his office under the by-laws of each Company.

By: 
Amy Taylor, Notary Public – My Commission Expires 3/9/27



CERTIFICATE

I, the undersigned Officer of each Company, DO HEREBY CERTIFY that:

1. That the original power of attorney of which the foregoing is a copy was duly executed on behalf of each Company and has not since been revoked, amended or modified; that the undersigned has compared the foregoing copy thereof with the original power of attorney, and that the same is a true and correct copy of the original power of attorney and of the whole thereof;
2. The following are resolutions which were adopted by the board of directors of each Company by unanimous written consent effective the 30th day of March, 2023 for BSIC and LIC and the 17th day of May, 2023 for EAC and EAIC and said resolutions have not since been revoked, amended or modified:
"RESOLVED, that each of the individuals named below is authorized to make, execute, seal and deliver for and on behalf of the Company any and all bonds, undertakings or obligations in surety or co-surety with others: RICHARD M. APPEL, MATTHEW E. CURRAN, MARGARET HYLAND, SHARON L. SIMS, CHRISTOPHER L. SPARRO, and be it further
RESOLVED, that each of the individuals named above is authorized to appoint attorneys-in-fact for the purpose of making, executing, sealing and delivering bonds, undertakings or obligations in surety or co-surety for and on behalf of the Company."
3. The undersigned further certifies that the above resolutions are true and correct copies of the resolutions as so recorded and of the whole thereof.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the corporate seal this 20th day of December, 2024

By: 
By: Daniel S. Lude, Secretary

NOTICE: U. S. TREASURY DEPARTMENT'S OFFICE OF FOREIGN ASSETS CONTROL (OFAC)

No coverage is provided by this Notice nor can it be construed to replace any provisions of any surety bond or other surety coverage provided. This Notice provides information concerning possible impact on your surety coverage due to directives issued by OFAC. **Please read this Notice carefully.** The Office of Foreign Assets Control (OFAC) administers and enforces sanctions policy, based on Presidential declarations of "national emergency". OFAC has identified and listed numerous foreign agents, front organizations, terrorists, terrorist organizations, and narcotics traffickers as "Specially Designated Nationals and Blocked Persons". This list can be located on the United States Treasury's website – <https://www.treasury.gov/resource-center/sanctions/SDN-List>. In accordance with OFAC regulations, if it is determined that you or any other person or entity claiming the benefits of any coverage has violated U.S. sanctions law or is a Specially Designated National and Blocked Person, as identified by OFAC, any coverage will be considered a blocked or frozen contract and all provisions of any coverage provided are immediately subject to OFAC. When a surety bond or other form of surety coverage is considered to be such a blocked or frozen contract, no payments nor premium refunds may be made without authorization from OFAC. Other limitations on the premiums and payments may also apply.

Any reproductions are void.

Surety Claims Submission: LexonClaimAdministration@sompo-intl.com


Telephone: 615-553-9500 Mailing Address: Sompo International; 12890 Lebanon Road; Mount Juliet, TN 37122-2870

ENDURANCE ASSURANCE CORPORATION
Balance Sheet - Statutory - Basis
December 31, 2023

Assets:	
Bonds	\$ 8,840,516,134
Preferred stocks	14,559,098
Common stocks	2,502,912,644
Cash, cash equivalents, and short-term investments	547,214,855
Other invested assets	367,228,494
Receivables for securities	12,539,247
Total cash and invested assets	<u>12,284,970,472</u>
Agents' balances or uncollected premiums	3,639,295,463
Reinsurance recoverable on loss and loss adjustment expense payments	866,922,861
Funds held by or deposited with reinsured companies	116,173,785
Investment income due and accrued	59,715,007
Current federal and foreign income tax recoverable and interest thereon	765,086
Net deferred tax asset	194,151,100
Receivables from parent, subsidiaries and affiliates	36,069,122
Other assets	240,998,501
Total admitted assets	<u>\$ 17,439,061,397</u>
Liabilities:	
Loss and loss adjustment expenses	\$ 6,724,893,327
Reinsurance payable on paid loss and loss adjustment expenses	823,698,569
Commissions payable, contingent commissions and other similar charges	(1,662,639)
Other expenses	28,177,519
Taxes, licenses and fees (excluding federal and foreign income taxes)	27,009,410
Unearned premiums	2,749,272,278
Advanced Premium	10,285,830
Ceded reinsurance premiums payable	1,277,805,256
Funds held by company under reinsurance treaties	75,781,757
Amounts withheld or retained by company for account of others	732,081,177
Remittances and items not allocated	248,815,866
Provision for reinsurance	58,958,628
Payable to parent, subsidiaries and affiliates	172,805,784
Payable for securities	50,301,420
Other liabilities	70,939,621
Total liabilities	<u>13,049,163,803</u>
Capital and surplus:	
Common capital stock	5,000,000
Surplus notes	200,000,000
Gross paid in and contributed surplus	3,480,137,280
Unassigned funds (surplus)	703,291,886
Aggregate write-ins for special surplus funds	1,468,428
Total capital and surplus	<u>4,389,897,594</u>
Total liabilities and capital and surplus	<u>\$ 17,439,061,397</u>

I, Hana Entela, Treasurer of Endurance Assurance Corporation (the "Company") do hereby certify that to the best of my knowledge and belief, the foregoing is a full and true Statutory Statement of Admitted Assets, Liabilities, Capital and Surplus of the Company as of December 31, 2023 prepared in conformity with accounting practices prescribed or permitted by the State of Delaware Department of Insurance. The foregoing statement should not be taken as a complete statement of financial condition of the Company. Such a statement is available upon request at the Company's office located at 4 Manhattanville Road, Purchase, NY 10577.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of the Company at Purchase, New York.

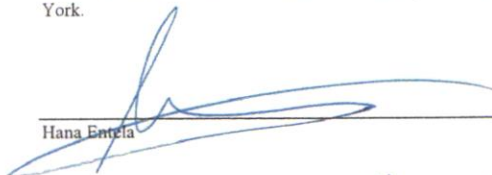

 Hana Entela

Subscribed and sworn to before me this 5th day of March, 2024







CERTIFICATE OF NYS WORKERS' COMPENSATION INSURANCE COVERAGE

1a. Legal Name & Address of Insured (use street address only)
STALCO CONSTRUCTION INC
1316 MOTOR PARKWAY
ISLANDIA, NY 11749
Work Location of Insured (Only required if coverage is specifically limited to certain locations in New York State, i.e., a Wrap-Up Policy)
1b. Business Telephone Number of Insured
6312546767
1c. NYS Unemployment Insurance Employer Registration Number of Insured
1d. Federal Employer Identification Number of Insured or Social Security Number
11-3149290
2. Name and Address of Entity Requesting Proof of Coverage (Entity Being Listed as the Certificate Holder)
The City of New York
Department of Design and Construction
30-30 Thomson Avenue
Long Island City, New York 11101-3045
3a. Name of Insurance Carrier
American Cas. Co. of Reading
3b. Policy Number of Entity Listed in Box "1a"
7017815909
3c. Policy effective period
02/01/2024 to 02/01/2025
3d. The Proprietor, Partners or Executive Officers are
[] included. (Only check box if all partners/officers included)
[X] all excluded or certain partners/officers excluded.

This certifies that the insurance carrier indicated above in box "3" insures the business referenced above in box "1a" for workers' compensation under the New York State Workers' Compensation Law. (To use this form, New York (NY) must be listed under Item 3A on the INFORMATION PAGE of the workers' compensation insurance policy). The Insurance Carrier or its licensed agent will send this Certificate of Insurance to the entity listed above as the certificate holder in box "2".

The insurance carrier must notify the above certificate holder and the Workers' Compensation Board within 10 days IF a policy is canceled due to nonpayment of premiums or within 30 days IF there are reasons other than nonpayment of premiums that cancel the policy or eliminate the insured from the coverage indicated on this Certificate. (These notices may be sent by regular mail.) Otherwise, this Certificate is valid for one year after this form is approved by the insurance carrier or its licensed agent, or until the policy expiration date listed in box "3c", whichever is earlier.

This certificate is issued as a matter of information only and confers no rights upon the certificate holder. This certificate does not amend, extend or alter the coverage afforded by the policy listed, nor does it confer any rights or responsibilities beyond those contained in the referenced policy.

This certificate may be used as evidence of a Workers' Compensation contract of insurance only while the underlying policy is in effect.

Please Note: Upon cancellation of the workers' compensation policy indicated on this form, if the business continues to be named on a permit, license or contract issued by a certificate holder, the business must provide that certificate holder with a new Certificate of Workers' Compensation Coverage or other authorized proof that the business is complying with the mandatory coverage requirements of the New York State Workers' Compensation Law.

Under penalty of perjury, I certify that I am an authorized representative or licensed agent of the insurance carrier referenced above and that the named insured has the coverage as depicted on this form.

Approved by: Phil Coletta
(Print name of authorized representative or licensed agent of insurance carrier)

Approved by: [Signature] 12/17/2024
(Signature) (Date)

Title: President

Telephone Number of authorized representative or licensed agent of insurance carrier: 631-465-4000

Please Note: Only insurance carriers and their licensed agents are authorized to issue Form C-105.2. Insurance brokers are NOT authorized to issue it.

Workers' Compensation Law

Section 57. Restriction on issue of permits and the entering into contracts unless compensation is secured.

1. The head of a state or municipal department, board, commission or office authorized or required by law to issue any permit for or in connection with any work involving the employment of employees in a hazardous employment defined by this chapter, and notwithstanding any general or special statute requiring or authorizing the issue of such permits, shall not issue such permit unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that compensation for all employees has been secured as provided by this chapter. Nothing herein, however, shall be construed as creating any liability on the part of such state or municipal department, board, commission or office to pay any compensation to any such employee if so employed.
2. The head of a state or municipal department, board, commission or office authorized or required by law to enter into any contract for or in connection with any work involving the employment of employees in a hazardous employment defined by this chapter, notwithstanding any general or special statute requiring or authorizing any such contract, shall not enter into any such contract unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that compensation for all employees has been secured as provided by this chapter.

CERTIFICATE OF INSURANCE COVERAGE

NYS DISABILITY AND PAID FAMILY LEAVE BENEFITS LAW

PART 1. To be completed by NYS disability and Paid Family Leave benefits carrier or licensed insurance agent of that carrier

<p>1a. Legal Name & Address of Insured (use street address only) STALCO CONSTRUCTION INC. 1316 MOTOR PARKWAY ISLANDIA, NY 11749</p> <p><small>Work Location of Insured (Only required if coverage is specifically limited to certain locations in New York State, i.e., Wrap-Up Policy)</small></p>	<p>1b. Business Telephone Number of Insured 6312546767</p> <p>1c. Federal Employer Identification Number of Insured or Social Security Number 11-3149290</p>
<p>2. Name and Address of Entity Requesting Proof of Coverage (Entity Being Listed as the Certificate Holder) The City of New York Department of Design & Construction 30-30 Thomson Avenue Long Island City, NY 11101-3045</p>	<p>3a. Name of Insurance Carrier Standard Security Life Insurance Company of New York</p> <p>3b. Policy Number of Entity Listed in Box 1a 74524-00</p> <p>3c. Policy Effective Period <u>4/1/2016</u> to <u>12/16/2025</u></p>


4. Policy provides the following benefits:

A. Both disability and Paid Family Leave benefits.
 B. Disability benefits only.
 C. Paid Family Leave benefits only.

5. Policy covers:

A. All of the employer's employees eligible under the NYS Disability and Paid Family Leave Benefits Law.
 B. Only the following class or classes of employer's employees:

Under penalty of perjury, I certify that I am an authorized representative or licensed agent of the insurance carrier referenced above and that the named insured has NYS disability and/or Paid Family Leave benefits insurance coverage as described above.

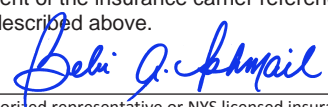Date Signed 12/17/2024 By 
(Signature of insurance carrier's authorized representative or NYS licensed insurance agent of that insurance carrier)

Telephone Number (212) 355-4141 Name and Title SUPERVISOR-DBL/POLICY SERVICES

IMPORTANT: If Boxes 4A and 5A are checked, and this form is signed by the insurance carrier's authorized representative or NYS Licensed Insurance Agent of that carrier, this certificate is COMPLETE. Mail it directly to the certificate holder.

If Box 4B, 4C or 5B is checked, this certificate is NOT COMPLETE for purposes of Section 220, Subd. 8 of the NYS Disability and Paid Family Leave Benefits Law. It must be emailed to PAU@wcb.ny.gov or it can be mailed for completion to the Workers' Compensation Board, Plans Acceptance Unit, PO Box 5200, Binghamton, NY 13902-5200.

PART 2. To be completed by the NYS Workers' Compensation Board (Only if Box 4B, 4C or 5B of Part 1 has been checked)

State of New York Workers' Compensation Board

According to information maintained by the NYS Workers' Compensation Board, the above-named employer has complied with the NYS Disability and Paid Family Leave Benefits Law (Article 9 of the Workers' Compensation Law) with respect to all of their employees.

Date Signed _____ By _____
(Signature of Authorized NYS Workers' Compensation Board Employee)

Telephone Number _____ Name and Title _____

Please Note: Only insurance carriers licensed to write NYS disability and Paid Family Leave benefits insurance policies and NYS licensed insurance agents of those insurance carriers are authorized to issue Form DB-120.1. **Insurance brokers are NOT authorized to issue this form.**



Additional Instructions for Form DB-120.1

By signing this form, the insurance carrier identified in Box 3 on this form is certifying that it is insuring the business referenced in Box 1a for disability and/or Paid Family Leave benefits under the NYS Disability and Paid Family Leave Benefits Law. The insurance carrier or its licensed agent will send this Certificate of Insurance Coverage (Certificate) to the entity listed as the certificate holder in Box 2.

The insurance carrier must notify the above certificate holder and the Workers' Compensation Board within 10 days IF a policy is cancelled due to nonpayment of premiums or within 30 days IF there are reasons other than nonpayment of premiums that cancel the policy or eliminate the insured from coverage indicated on this Certificate. (These notices may be sent by regular mail.) Otherwise, this Certificate is valid for one year after this form is approved by the insurance carrier or its licensed agent, or until the policy expiration date listed in Box 3c, whichever is earlier.

This certificate is issued as a matter of information only and confers no rights upon the certificate holder. This certificate does not amend, extend or alter the coverage afforded by the policy listed, nor does it confer any rights or responsibilities beyond those contained in the referenced policy.

This Certificate may be used as evidence of a NYS disability and/or Paid Family Leave benefits contract of insurance only while the underlying policy is in effect.

Please Note: Upon the cancellation of the disability and/or Paid Family Leave benefits policy indicated on this form, if the business continues to be named on a permit, license or contract issued by a certificate holder, the business must provide that certificate holder with a new Certificate of Insurance Coverage for NYS disability and/or Paid Family Leave Benefits or other authorized proof that the business is complying with the mandatory coverage requirements of the NYS Disability and Paid Family Leave Benefits Law.

NYS DISABILITY AND PAID FAMILY LEAVE BENEFITS LAW

§220. Subd. 8

(a) The head of a state or municipal department, board, commission or office authorized or required by law to issue any permit for or in connection with any work involving the employment of employees in employment as defined in this article, and notwithstanding any general or special statute requiring or authorizing the issue of such permits, shall not issue such permit unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that the payment of disability benefits and after January first, two thousand and twenty-one, the payment of family leave benefits for all employees has been secured as provided by this article. Nothing herein, however, shall be construed as creating any liability on the part of such state or municipal department, board, commission or office to pay any disability benefits to any such employee if so employed.

(b) The head of a state or municipal department, board, commission or office authorized or required by law to enter into any contract for or in connection with any work involving the employment of employees in employment as defined in this article and notwithstanding any general or special statute requiring or authorizing any such contract, shall not enter into any such contract unless proof duly subscribed by an insurance carrier is produced in a form satisfactory to the chair, that the payment of disability benefits and after January first, two thousand eighteen, the payment of family leave benefits for all employees has been secured as provided by this article.



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

12/17/2024

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER AssuredPartners Northeast, LLC. 100 Baylis Road Suite 300 Melville NY 11747	CONTACT NAME: Christine Schuller PHONE (A/C, No, Ext): (631) 465-4000 E-MAIL ADDRESS: chris.schuller@assuredpartners.com	FAX (A/C, No):
	INSURER(S) AFFORDING COVERAGE	
INSURED STALCO CONSTRUCTION INC. 1316 MOTOR PKWY ISLANDIA NY 11749	INSURER A: Nat'l Fire Ins.Co.of Hartford	20478
	INSURER B: Continental Casualty Company	20443
	INSURER C: Continental Insurance Co.	35289
	INSURER D: American Cas. Co. of Reading	20427
	INSURER E: Philadelphia Indemnity Insurance Co.	18058
	INSURER F: Westchester Surplus Lines Ins. Co.	10172

COVERAGES

CERTIFICATE NUMBER: *24-25*

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	COMMERCIAL GENERAL LIABILITY			7015379257	02/01/2024	02/01/2025	EACH OCCURRENCE \$ 2,000,000
	<input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR						DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 1,000,000
	<input checked="" type="checkbox"/> Contractual Liability						MED EXP (Any one person) \$ 15,000
	<input checked="" type="checkbox"/> XCU included						PERSONAL & ADV INJURY \$ 2,000,000
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE \$ 4,000,000
	<input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC						PRODUCTS - COMP/OP AGG \$ 4,000,000
	OTHER:						Employee Benefits \$ 1,000,000
B	AUTOMOBILE LIABILITY			7015379260	02/01/2024	02/01/2025	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000
	<input checked="" type="checkbox"/> ANY AUTO						BODILY INJURY (Per person) \$
	<input type="checkbox"/> OWNED AUTOS ONLY	<input type="checkbox"/> SCHEDULED AUTOS					BODILY INJURY (Per accident) \$
	<input type="checkbox"/> HIRED AUTOS ONLY	<input type="checkbox"/> NON-OWNED AUTOS ONLY					PROPERTY DAMAGE (Per accident) \$
							\$
C	<input checked="" type="checkbox"/> UMBRELLA LIAB			7015379274	02/01/2024	02/01/2025	EACH OCCURRENCE \$ 5,000,000
	<input type="checkbox"/> EXCESS LIAB	<input checked="" type="checkbox"/> OCCUR					AGGREGATE \$ 5,000,000
	<input type="checkbox"/> DED <input checked="" type="checkbox"/> RETENTION \$ 10,000	<input type="checkbox"/> CLAIMS-MADE					\$
D	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY			7017815909	02/01/2024	02/01/2025	<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH)	Y / N	N / A				E.L. EACH ACCIDENT \$ 1,000,000
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE \$ 1,000,000
							E.L. DISEASE - POLICY LIMIT \$ 1,000,000
E	Excess Liability 4 x 5			PHUB898816	02/01/2024	02/01/2025	4Mill/4Mill

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

RE: Stalco Job 2421 Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade
 100 Centre St, New York, NY 10013

The following are included as additional insured if required by written contract subject to the terms and conditions of the stated policies:

City of New York, including its officials and employees

The City of New York Department of Design and Construction 30-30 Thomson Avenue Long Island City, New York 11101-3045

Jordan Parnass Digital Architecture, 68 Jay Street, Suite 501, Brooklyn, NY 11201

JFK&M Consulting Group, LLC, A134 West 37th Street, 12th Floor, New York,

CERTIFICATE HOLDER**CANCELLATION**

The City of New York Department of Design and Construction
 30-30 Thomson Avenue

Long Island City

NY 11101-3045

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

© 1988-2015 ACORD CORPORATION. All rights reserved.



ADDITIONAL REMARKS SCHEDULE

AGENCY AssuredPartners Northeast, LLC.		NAMED INSURED STALCO CONSTRUCTION INC.	
POLICY NUMBER		EFFECTIVE DATE:	
CARRIER	NAIC CODE		

ADDITIONAL REMARKS

THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,

FORM NUMBER: 25 **FORM TITLE:** Certificate of Liability Insurance

General Liability, auto, and umbrella coverage apply on a primary and non-contributory basis, with a waiver of subrogation in favor of additional insured's



AGENCY CUSTOMER ID: _____

LOC #: _____

ADDITIONAL REMARKS SCHEDULE

Page ____ of ____

AGENCY AssuredPartners Northeast, LLC.		NAMED INSURED STALCO CONSTRUCTION INC.	
POLICY NUMBER			
CARRIER	NAIC CODE	EFFECTIVE DATE:	

ADDITIONAL REMARKS

THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,

FORM NUMBER: 25 **FORM TITLE:** Certificate of Liability Insurance: Notes

Insurer (F) Westchester Surplus Lines Ins. NAIC #10172 Policy #G70969075 005 Practice Pollution Liability \$2,000,000 Occurrence/ \$2,000,000 Aggregate 10K Retention Effective 02/01/2024 to 02/01/2025
 Insurer (G) Hartford Fire Insurance Company NAIC #19682 Policy #12UUMBJ2176 Blanket Leased Equipment \$250,000 Effective 04/02/2024 to 04/02/2025
 Insurer (H) Admiral Insurance Company NAIC #24856
 Policy #DEP1639325P7 Employment Practices Liability limit \$1,000,000 effective 02/01/2024 to 02/01/2025



NEW YORK CONSTRUCTION CERTIFICATE OF LIABILITY INSURANCE ADDENDUM

DATE (MM/DD/YYYY) 02/01/2024

THIS ADDENDUM SUMMARIZES SOME OF THE POLICY PROVISIONS IN THE REFERENCED INSURANCE POLICIES AND IS ISSUED AS A MATTER OF INFORMATION ONLY; IT CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. ALL TERMS, EXCLUSIONS AND CONDITIONS IN THE ACTUAL POLICY SHOULD BE CONSULTED FOR A MORE DETAILED ANALYSIS OF COVERAGE, AS THIS ADDENDUM DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES.

AGENCY AssuredPartners Northeast, LLC.		NAMED INSURED(S) Stalco Construction Inc	
POLICY NUMBER 7015379257	EFFECTIVE DATE 02/01/2024	CARRIER National Fire Insurance Company of Hartford	NAIC CODE 20478

ADDENDUM INFORMATION CERTIFICATE NUMBER: REVISION NUMBER:

A. Insurer

- Admitted / authorized
- Excess line or free trade zone

B. General Liability (GL) policy form

- ISO / ISO modified
- Other

C. Specific operations excluded or restricted (GL policy)

- Location: _____
- Type of construction: Exterior Finish System Products/Completed Operations Exclusion Endorsement - New York
- Building height: _____
- Classifications [see attached declarations / endorsement]
- Designated work [see attached endorsement]

D. Additional insured endorsement (GL policy)

- CG 20 10 CG 20 26 CG 20 32 CG 20 33 CG 20 37 CG 20 38
- Other: #: CNA75079XX Title: Blanket additional insured-Owners , Lessees or Contractors - with products completed operations

E. According to the terms of this GL policy, the additional insured has primary and noncontributory coverage

- Yes No and no other option is available with this insurer

F. Additional insured will receive advance notice if insurer cancels (GL policy)

- Yes No and no other option is available with this insurer

G. Blanket contractual liability located in the "insured contract" definition (Section V, Number 9, Item f. in the ISO CGL policy) is removed or restricted

- Yes and no other option is available with this insurer No changes made

H. "Insured contract" exception to the employers liability exclusion is removed or modified (GL policy)

- Yes and no other option is available with this insurer No changes made

I. GL policy (including endorsements) does not cover the additional insured for claims involving injury to employees of the named insured or subcontractors (not workers' compensation)

- Yes and no other option is available with this insurer No changes made

J. Earth movement, excavation or explosion / collapse / underground property damage is excluded or restricted (GL policy)

Yes and no other option is available with this insurer No changes made

K. Insured vs. insured suits (cross liability in the ISO CGL policy) are excluded or restricted (other than named insured vs. named insured)

Yes and no other option is available with this insurer No changes made

L. Property damage to work performed by subcontractors (exception to the "damage to your work" exclusion in the ISO CGL policy) is excluded or restricted

Yes and no other option is available with this insurer No changes made

M. Excess / umbrella policy is primary and non-contributory for additional insureds

Yes, by specific policy provision Yes, by endorsement No and no other option is available with this insurer



AUTHORIZED REPRESENTATIVE SIGNATURE

02/01/2024
DATE (MM/DD/YYYY)

CITY OF NEW YORK
CERTIFICATION BY INSURANCE AGENT OR BROKER

The undersigned insurance broker or agent represents to the City of New York that the attached Certificate of Insurance is accurate in all material respects.

AssuredPartners Northeast, LLC.
[Name of broker or agent (typewritten)]

100 Baylis Road, Suite 300, Melville, NY 11747
[Address of broker or agent (typewritten)]

debbie.saracino@assuredpartners.com
[Email address of broker or agent (typewritten)]

(631) 465-4000 / (631) 465-4005
[Phone Number / Fax Number of broker or agent (typewritten)]

Debra Saracino
[Signature of authorized officer of broker]

Debra Saracino, Chief Operating Officer
[Name and title of authorized official, broker or agent (typewritten)]

State of New York)
County of Suffolk)ss.:

Sworn to before me this
17th day of December, 2024

Jennifer Spadaro
NOTARY PUBLIC FOR THE STATE OF New York

JENNIFER SPADARO
Notary Public, State of New York
Reg. No. 01SP5017514
Qualified in Suffolk County
Commission Expires September 7, 2025

CONTRACT SIGNATURE PAGE

This Contract is entered by and between the City of New York (“City”), acting by and through the **DEPARTMENT OF DESIGN AND CONSTRUCTION**, and **STALCO CONSTRUCTION INC** (“Contractor”).

This Contract consists of this contract signature page as well as the following documents (“Contract Documents”) which are located in the Documents tab of the PASSPort record titled **85024B0059-CO283TOIL**.

1. 2421 Manhattan Criminal Court - GL - Dec 27 2024 8:49PM
2. Cert By Broker (6) - Dec 27 2024 8:48PM
3. CO283TOIL_Addendum_1 (2).pdf - Dec 16 2024 8:20PM
4. CO283TOIL_Addendum2 - Dec 16 2024 8:20PM
5. CO283TOIL_Addendum3 (2).pdf - Dec 16 2024 8:20PM
6. CO283TOIL_Addendum4.pdf - Dec 16 2024 8:20PM
7. CO283TOIL_Addendum5 (1).pdf - Dec 16 2024 8:20PM
8. CO283TOIL_Addendum6.pdf - Dec 16 2024 8:20PM
9. CO283TOIL_Addendum7.pdf - Dec 16 2024 8:20PM
10. CO283TOIL_Bid Drawings_Addendum5 (1).pdf - Dec 16 2024 8:20PM
11. CO283TOIL_Volume2_Addendum6.pdf - Dec 16 2024 8:20PM
12. CO283TOIL_Volume3_Addendum6.pdf - Dec 16 2024 8:20PM
13. Payment Performance Bond - Dec 27 2024 8:47PM
14. PLA-CO283TOIL - Jan 13 2025 3:28PM
15. Proposal_Bid_85024B0059001 (24).pdf - Dec 16 2024 8:20PM
16. Proposal_Bid_85024B0059001 (28).pdf - Jan 3 2025 4:28PM
17. Proposal_Bid_85024B0059001 (31).pdf - Dec 16 2024 8:20PM
18. RFx Document_85024B0059001 (6).pdf - Dec 16 2024 8:20PM
19. RFx Document_85024B0059001 (8).pdf - Dec 16 2024 8:20PM
20. Stalco 2421 CG 2010 - Dec 27 2024 8:48PM
21. Stalco 2421 CG 2037 - Dec 27 2024 8:49PM
22. Stalco 2421 DBL - Dec 27 2024 8:49PM
23. Stalco 2421 WC - Dec 27 2024 8:48PM
24. Stalco 855 Updated - Dec 27 2024 8:47PM
25. Stalco Construction Cost Breakdown - r2 - Jan 13 2025 3:26PM
26. Volume 1_Addendum6.pdf - Dec 16 2024 8:20PM

The above order does not represent an order of precedence. The Contract shall be governed by the order of precedence, if any, in the Contract Documents or by ordinary contract principles if no such order of precedence exists.

Each party is signing this Contract electronically on the date stated in that party's electronic signature.

The City of New York

By: **DEPARTMENT OF DESIGN AND CONSTRUCTION**

DocuSigned by:

ERIC MACFARLANE

1A87ABA0188B4TC...

(Signature)

Name: ERIC MACFARLANE

Title: I*P80First Deputy Commissioner

Date: 1/16/2025 | 08:23:45 PST

Contractor

By: **STALCO CONSTRUCTION INC**

DocuSigned by:

Alan Nahmias

C66DA36661464A7...

(Signature)

Name: Alan Nahmias

Title: President

Date: 1/15/2025 | 08:31:20 PST

Signatures

Number of pages (including this one): 3

- ✓ Document signed electronically, the signatories agreeing that it is authentic between them.
- ✓ By signing this document, the signatories acknowledge and agree that they have carefully read this document and approve all its terms.

Nom: Nahmias Alan

Fonction: Principle/CFO

Place: Stalco Construction Inc.

Date Signed: 1/15/2025 | 08:31:20 PST

Alan Nahmias

C66DA36861464A7...

Nom: Macfarlane Eric

Fonction:

Place: lic ny

Date Signed: 1/16/2025 | 08:23:45 PST

ERIC MACFARLANE

1A87ABA0188B41C...

ASBESTOS HANDLER

SEE HAZARDOUS MATERIAL HANDLER

BLASTER

Blaster

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$58.21**

Supplemental Benefit Rate per Hour: **\$54.03**

Blaster - Hydraulic Trac Drill

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$52.35**

Supplemental Benefit Rate per Hour: **\$54.03**

Blaster - Wagon: Air Trac: Quarry Bar: Drillrunners

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$51.52**

Supplemental Benefit Rate per Hour: **\$54.03**

Blaster - Journeyperson

(Laborer, Chipper/Jackhammer including Walk Behind Self Propelled Hydraulic Asphalt and Concrete Breakers and Hydro (Water) Demolition, Powder Carrier, Hydraulic Chuck Tender, Chuck Tender and Nipper)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.00**

Supplemental Benefit Rate per Hour: **\$54.03**

Blaster - Magazine Keepers: (Watch Person)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$22.50**

Supplemental Benefit Rate per Hour: **\$54.03**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

Labor Day
Thanksgiving Day

Shift Rates

When two shifts are employed, single time rate shall be paid for each shift. When three shifts are found necessary, each shift shall work seven and one half hours (7 ½), but shall be paid for eight (8) hours of labor, and be permitted one half hour for lunch.

(Local #731)

BOILERMAKER

Boilermaker

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$67.38**

Supplemental Benefit Rate per Hour: **\$49.33**

Supplemental Note: For time and one half overtime - \$73.42 For double overtime - \$97.51

Overtime Description

For Repair and Maintenance work:

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

For New Construction work:

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Memorial Day
Independence Day
Columbus Day
Election Day
Veteran's Day
Thanksgiving Day
Christmas Day

Quadruple time the regular rate for work on the following holiday(s).
Labor Day

Paid Holidays

Good Friday
Day after Thanksgiving
Day before Christmas
Day before New Year's Day

Shift Rates

On jobs requiring two (2) or three (3) shifts, the first shift shall work eight (8) hours at the regular straight-time hourly rate. The second shift shall work eight (8) hours and receive eight hours at the regular straight time hourly rate plus two dollars (\$2.00) per hour. The third shift shall work eight (8) hours and receive eight hours at the regular straight time hourly rate plus two dollars and twenty-five cents (\$2.25) per hour.

(Local #5)

BRICKLAYER

Bricklayer

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$59.09**

Supplemental Benefit Rate per Hour: **\$43.05**

Overtime Description

Time and one half the regular rate after a 7 hour day. If working on a job that is predominately Pointer, Cleaner, Caulker work, then Time and one half the regular rate after an 8 hour day.

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

The second shift wage rate shall be a 15% wage premium with no premium for supplemental benefits. There must be a first shift in order to work a second shift. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, eight hours will be paid at straight time rate for seven hours of work.

(Bricklayer District Council)

CARPENTER - BUILDING COMMERCIAL

Building Commercial

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$57.05**

Supplemental Benefit Rate per Hour: **\$48.33**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

None

Shift Rates

The second shift will receive one hour at the double time rate of pay for the last hour of the shift; eight hours pay for seven hours of work, nine hours pay for eight hours of work. There must be a first shift in order to work a second shift. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, the rule for the second shift will apply.

(Carpenters District Council)

CARPENTER - HEAVY CONSTRUCTION WORK

(Construction of Engineered Structures and Building Foundations including all form work)

Heavy Construction Work

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$60.59**

Supplemental Benefit Rate per Hour: **\$55.84**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate and the supplemental benefits shall be paid at the straight time rate. When two (2) or more shifts of Carpenters are employed, single time will be paid for each shift.

(Carpenters District Council)

CARPENTER - HIGH RISE CONCRETE FORMS (Excludes Engineered Structures and Building Foundations)

Carpenter High Rise A

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$51.48**

Supplemental Benefit Rate per Hour: **\$44.74**

Carpenter High Rise B

Carpenter High Rise B worker is excluded from high risk operations such as erection decking, perimeter debris netting, leading edge work, self-climbing form systems, and the installation of cocoon systems unless directly supervised by a Carpenter High Rise A worker.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$40.89**

Supplemental Benefit Rate per Hour: **\$18.05**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

None

Shift Rates

The second shift wage rate shall be 113% of the straight time hourly wage rate. However, any shift beginning after 5:00 P.M. shall be paid at time and one half the regular hourly rate. There must be a first shift in order to work a second shift. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, the rule for the second shift will apply.

(Carpenters District Council)

CARPENTER - SIDEWALK SHED, SCAFFOLD AND HOIST

Carpenter - Hod Hoist

(Assisted by Mason Tender)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$55.00**

Supplemental Benefit Rate per Hour: **\$48.90**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Shift Rates

The second shift will receive 112% of the straight time hourly rate. Benefit fund contributions shall be paid at the straight time rate. There must be a first shift in order to work a second shift. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, the rule for the second shift will apply.

(Carpenters District Council)

CARPENTER - WOOD WATER STORAGE TANK

Tank Mechanic

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$37.83**

Supplemental Benefit Rate per Hour: **\$25.32**

Tank Helper

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$29.69**

Supplemental Benefit Rate per Hour: **\$25.32**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Day after Thanksgiving

1/2 day on Christmas Eve if work is performed in the A.M.

Christmas Day

1/2 day on New Year's Eve if work is performed in the A.M.

Vacation

Employed for one (1) year.....one (1) week vacation (40 hours)

Employed for three (3) years.....two (2) weeks vacation (80 hours)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Employed for more than twenty (20) years.....three (3) weeks vacation (120 hours)

SICK LEAVE:

Two (2) sick days after being employed for twenty (20) years.

(Carpenters District Council)

CEMENT & CONCRETE WORKER

Building Work

Cement & Concrete Worker

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.28**

Supplemental Benefit Rate per Hour: **\$32.20**

Supplemental Note: \$36.70 on Saturdays; \$41.20 on Sundays & Holidays

Cement & Concrete Worker - (Hired after 2/6/2016)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$36.80**

Supplemental Benefit Rate per Hour: **\$24.20**

Supplemental Note: \$26.70 on Saturdays; \$29.20 on Sundays & Holidays

Overtime Description

Time and one half the regular rate after 7 hour day (time and one half the regular rate after an 8 hour day when working with Dockbuilders on pile cap forms and for work below street level to the top of the foundation wall, not to exceed 2 feet or 3 feet above the sidewalk-brick shelf, when working on the foundation and structure.)

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

1/2 day before Christmas Day
1/2 day before New Year's Day

Shift Rates

On shift work extending over a twenty-four hour period, all shifts are paid at straight time.

(Cement & Concrete Workers District Council 16)

CEMENT MASON

Cement Mason

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$57.72**

Supplemental Benefit Rate per Hour: **\$34.51**

Supplemental Note: Supplemental benefit time and one half rate: \$67.72; Double time rate: double the base supplemental benefit rate.

Overtime Description

Time and one-half the regular rate after an 8 hour day, double time the regular rate after 10 hours. Time and one-half the regular rate on Saturday, double time the regular rate after 10 hours. Double time the regular rate on Sunday. Four Days a week at Ten (10) hours straight time is allowed.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

Shift Rates

For off shift work, (at times other than the regular 7:00 A.M. to 3:30 P.M. work day) a cement mason shall be paid at the regular hourly rate plus a 25% per hour differential.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

(Local #780) (BCA)

CORE DRILLER

Test Boring

Core Driller

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$46.25**

Supplemental Benefit Rate per Hour: **\$33.36**

Core Driller Helper

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$36.28**

Supplemental Benefit Rate per Hour: **\$33.36**

Core Driller Helper(Third year in the industry)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$32.62**

Supplemental Benefit Rate per Hour: **\$33.36**

Core Driller Helper (Second year in the industry)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$28.98**

Supplemental Benefit Rate per Hour: **\$33.36**

Core Driller Helper (First year in the industry)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.32**

Supplemental Benefit Rate per Hour: **\$33.36**

Overtime Description

Time and one half the regular rate for work on a holiday plus Holiday pay when worked.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

New Year's Day
Memorial Day
Independence Day
Labor Day
Veteran's Day
Thanksgiving Day
Christmas Day

Shift Rates

When two (2) or more shifts are employed, single time shall be paid for each shift, but those employees employed on a shift other than from 8:00 A.M. to 5:00 P.M. shall, in addition, receive two dollars (\$2.00) per hour differential for each hour worked. When three (3) shifts are needed, each shift shall work seven and one-half (7 ½) hours paid for eight (8) hours of labor and be permitted one-half (½) hour for mealtime.

(Carpenters District Council)

DERRICKPERSON AND RIGGER

Derrick Person & Rigger

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$60.40**

Supplemental Benefit Rate per Hour: **\$60.14**

Derrick Person & Rigger - Site Work

Assists the Stone Mason-Setter in the setting of stone and paving stone.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.54**

Supplemental Benefit Rate per Hour: **\$47.70**

Overtime Description

The first two hours of overtime on weekdays and the first seven hours of work on Saturdays are paid at time and one half for wages and supplemental benefits. All additional overtimes is paid at double time for wages and supplemental benefits.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Good Friday
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

(Local #197)

DIVER

Diver (Marine)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$75.46**

Supplemental Benefit Rate per Hour: **\$55.84**

Diver Tender (Marine)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$55.00**

Supplemental Benefit Rate per Hour: **\$55.84**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

None

Shift Rates

When three shifts are utilized each shift shall work seven and one half-hours (7 1/2 hours) and paid for 8 hours, allowing for one half hour for lunch.

(Carpenters District Council)

DOCKBUILDER - PILE DRIVER

Dockbuilder - Pile Driver

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$60.59**

Supplemental Benefit Rate per Hour: **\$55.84**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate and the supplemental benefits shall be paid at the straight time rate. When two (2) or more shifts of Dockbuilders are employed, single time will be paid for each shift.

(Carpenters District Council)

DRIVER: TRUCK (TEAMSTER)

Driver - Dump Truck

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$44.17**

Supplemental Benefit Rate per Hour: **\$59.15**

Supplemental Note: Over 40 hours worked: at time and one half rate - \$25.50; at double time rate - \$34.00

Driver - Tractor Trailer

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.32**

Supplemental Benefit Rate per Hour: **\$56.90**

Supplemental Note: Over 40 hours worked: at time and one half rate - \$25.50; at double time rate - \$34.00

Driver - Euclid & Turnapull Operator

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.88**

Supplemental Benefit Rate per Hour: **\$56.90**

Supplemental Note: Over 40 hours worked: at time and one half rate - \$25.50; at double time rate - \$34.00

Overtime Description

For Paid Holidays: Holiday pay for all holidays shall be prorated based two hours per day for each day worked in the holiday week, not to exceed 8 hours of holiday pay. For Thanksgiving week, the prorated share shall be 5 1/3 hours of holiday pay for each day worked in Thanksgiving week.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

Shift Rates

Off shift work commencing between 6:00 P.M. and 5:00 A.M. shall work eight and one half (8 1/2) hours allowing for one half hour for lunch

Driver Redi-Mix (Sand & Gravel)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$43.29**

Supplemental Benefit Rate per Hour: **\$50.77**

Supplemental Note: Over 40 hours worked: time and one half rate \$20.48; double time rate \$27.30

Overtime Description

For Paid Holidays: Employees who do not work on a contractual holiday shall be compensated two (2) hours extra pay in straight time wages and benefits for every day on which the Employee does not pass up a day's work during the calendar week (Sunday through Saturday) of the holiday, up to a maximum of ten (10) hours in wages and eight (8) hours in benefit contributions for the holiday

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

Martin Luther King Jr. Day
President's Day
Columbus Day
Veteran's Day

Triple time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Thanksgiving Day
Christmas Day

(Local #282)

ELECTRICIAN

(Including installation of low voltage cabling carrying data, video and/or voice on building construction/alteration/renovation projects.)

Electrician "A" (Regular Day / Day Shift)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$62.00**

Supplemental Benefit Rate per Hour: **\$62.25**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician "A" (Regular Day Overtime after 7 hrs / Day Shift Overtime after 8 hrs)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$93.00**

Supplemental Benefit Rate per Hour: **\$64.24**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician "A" (Swing Shift)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$72.75**

Supplemental Benefit Rate per Hour: **\$70.56**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician "A" (Swing Shift Overtime after 7.5 hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$109.13**

Supplemental Benefit Rate per Hour: **\$72.91**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician "A" (Graveyard Shift)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$81.49**

Supplemental Benefit Rate per Hour: **\$77.61**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician "A" (Graveyard Shift Overtime after 7 hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$122.24**

Supplemental Benefit Rate per Hour: **\$80.23**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

*** Supplemental Benefit Rate per Hour Note**

In addition to the Supplemental Benefit Rates per Hour listed above, the employer must provide an additional 6.2% of taxable gross pay earned on covered work only. This additional Supplemental Benefit Rate will terminate when the employee has contributed the maximum annual Social Security tax required by law, on all work performed.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on a holiday.

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

For multiple shifts of temporary light and/or power, the temporary light and/or power employee shall be paid for 8 hours at the straight time rate. For three or less workers performing 8 hours temporary light and/or power the supplemental benefit rate is \$24.36, effective 04/13/2023 the supplemental benefit rate is \$24.78 - See * Supplemental Benefit Rate per Hour Note above.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Electrician "M" (First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$32.00**

Supplemental Benefit Rate per Hour: **\$27.20**

First and Second Year "M" Wage Rate Per Hour: **\$27.50**

First and Second Year "M" Supplemental Rate: **\$24.79**

Electrician "M" (Overtime After First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.00**

Supplemental Benefit Rate per Hour: **\$29.23**

First and Second Year "M" Wage Rate Per Hour: **\$41.25**

First and Second Year "M" Supplemental Rate: **\$26.52**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Local #3)

ELECTRICIAN - ALARM TECHNICIAN

(Scope of Work - Inspect, test, repair, and replace defective, malfunctioning, or broken devices, components and controls of Fire, Burglar and Security Systems)

Alarm Technician

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$37.40**

Supplemental Benefit Rate per Hour: **\$21.44**

Supplemental Note: \$19.31 only after 8 hours worked in a day

Overtime Description

Time and one half the regular rate for work on the following holidays: Columbus Day, Veterans Day, Day after Thanksgiving.

Double time the regular rate for work on the following holidays: New Year's day, Martin Luther King Jr. Day, President's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Night Differential is based upon a ten percent (10%) differential between the hours of 4:00 P.M. and 12:30 A.M. and a fifteen percent (15%) differential for the hours 12:00 A.M. to 8:30 A.M.

Vacation

At least 1 year of employment.....ten (10) days

5 years or more of employment.....fifteen (15) days

10 years of employment.....twenty (20) days

Plus one Personal Day per year

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Sick Days:

One day per Year. Up to 4 vacation days may be used as sick days.

(Local #3)

ELECTRICIAN-STREET LIGHTING WORKER

Electrician - Electro Pole Electrician

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$62.00**

Supplemental Benefit Rate per Hour: **\$62.85**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician - Electro Pole Foundation Installer

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.66**

Supplemental Benefit Rate per Hour: **\$48.72**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

Electrician - Electro Pole Maintainer

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$41.61**

Supplemental Benefit Rate per Hour: **\$44.45**

* Supplemental Note: See Supplemental Benefit Rate per Hour Note below

*** Supplemental Benefit Rate per Hour Note**

In addition to the Supplemental Benefit Rates per Hour listed above, the employer must provide an additional 6.2% of taxable gross pay earned on covered work only. This additional Supplemental Benefit Rate will terminate when the employee has contributed the maximum annual Social Security tax required by law, on all work performed.

Overtime Description

Electrician - Electro Pole Electrician: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week.

Electrician - Electro Pole Foundation Installer: Time and one half the regular rate after 8 hours within a 24 hour period and Saturday and Sunday.

Electrician - Electro Pole Maintainer: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week. Saturdays and Sundays may be used as a make-up day at straight time when a day is lost during the week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #3)

ELEVATOR CONSTRUCTOR

Elevator Constructor

Effective Period: 7/1/2024 - 3/16/2025

Wage Rate per Hour: **\$80.35**

Supplemental Benefit Rate per Hour: **\$41.23**

Effective Period: 3/17/2025 - 6/30/2025

Wage Rate per Hour: **\$83.27**

Supplemental Benefit Rate per Hour: **\$42.33**

Overtime Description

For New Construction: work performed after an 8 hour day, Saturday, Sunday or between 4:30pm and 7:00am shall be paid at double time rate.

Existing buildings: work performed after an 8 hour day, Saturday, Sunday or between 5:30pm and 7:00 am shall be paid time and one half.

Overtime

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Thanksgiving Day
Day after Thanksgiving
Christmas Day

Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ELEVATOR REPAIR & MAINTENANCE

Elevator Service/Modernization Mechanic

Effective Period: 7/1/2024 - 3/16/2025

Wage Rate per Hour: **\$63.16**

Supplemental Benefit Rate per Hour: **\$41.18**

Effective Period: 3/17/2025 - 6/30/2025

Wage Rate per Hour: **\$65.54**

Supplemental Benefit Rate per Hour: **\$42.28**

Overtime Description

For Scheduled Service Work: Double time - work scheduled in advance by two or more workers performed on Sundays, Holidays, and between midnight and 7:00am.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Afternoon shift - regularly hourly rate plus a (15%) fifteen percent differential. Graveyard shift - time and one half the regular rate.

Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ENGINEER

Engineer - Heavy Construction Operating Engineer I

Cherry pickers 20 tons and over and Loaders (rubber tired and/or tractor type with a manufacturer's minimum rated capacity of six cubic yards and over).

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$76.57**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$122.51**

Engineer - Heavy Construction Operating Engineer II

Backhoes, Basin Machines, Groover, Mechanical Sweepers, Bobcat, Boom Truck, Barrier Transport (Barrier Mover) & machines of similar nature. Operation of Churn Drills and machines of a similar nature, Stetco Silent Hoist and machines of similar nature, Vac-Alls, Meyers Machines, John Beam and machines of a similar nature, Ross Carriers and Travel Lifts and machines of a similar nature, Bulldozers, Scrapers and Turn-a-Pulls: Tugger Hoists (Used exclusively for handling excavated material); Tractors with attachments, Hyster and Roustabout Cranes, Cherry pickers. Austin Western, Grove and machines of a similar nature, Scoopmobiles, Monorails, Conveyors, Trenchers: Loaders-Rubber Tired and Tractor: Barber Greene and Eimco Loaders and Eimco Backhoes; Mighty Midget and similar breakers and Tampers, Curb and Gutter Pavers and Motor Patrol, Motor Graders and all machines of a similar nature. Locomotives 10 Tons or under. Mini-Max, Break-Tech and machines of a similar nature; Milling machines, robotic and demolition machines and machines of a similar nature, shot blaster, skid steer machines and machines of a similar nature including bobcat, pile rig rubber-tired excavator (37,000 lbs. and under), 2 person auger.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$74.14**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$118.62**

Engineer - Heavy Construction Operating Engineer III

**OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE**

Minor Equipment such as Tractors, Post Hole Diggers, Ditch Witch (Walk Behind), Road Finishing Machines, Rollers five tons and under, Tugger Hoists, Dual Purpose Trucks, Fork Lifts, and Dempsey Dumpers, Fireperson.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$70.09**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$112.14**

Engineer - Heavy Construction Maintenance Engineer I

Installing, Repairing, Maintaining, Dismantling of all equipment including Steel Cutting, Bending and Heat Sealing Machines, Mechanical Heaters, Grout Pumps, Bentonite Pumps & Plants, Screening Machines, Fusion Coupling Machines, Tunnel Boring Machines Moles and Machines of a similar nature, Power Packs, Mechanical Hydraulic Jacks; all drill rigs including but not limited to Churn, Rotary Caisson, Raised Bore & Drills of a similar nature; Personnel, Inspection & Safety Boats or any boats used to perform functions of same, Mine Hoists, Whirlies, all Climbing Cranes, all Tower Cranes, including but not limited to Truck Mounted and Crawler Type and machines of similar nature; Maintaining Hydraulic Drills and machines of a similar nature; Well Point System-Installation and dismantling; Burning, Welding, all Pumps regardless of size and/or motor power, except River Cofferdam Pumps and Wells Point Pumps; Motorized Buggies (three or more); equipment used in the cleaning and televising of sewers, but not limited to jet-rodder/vacuum truck, vacall/vactor, closed circuit television inspection equipment; high powered water pumps, jet pumps; screed machines and concrete finishing machines of a similar nature; vermeers.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$73.76**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$118.02**

Engineer - Heavy Construction Maintenance Engineer II

On Base Mounted Tower Cranes

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$98.47**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$157.55**

Engineer - Heavy Construction Maintenance Engineer III

On Generators, Light Towers

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$46.95**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$75.12**

Engineer - Heavy Construction Maintenance Engineer IV

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

On Pumps and Mixers including mud sucking

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.29**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$77.26**

Engineer - Heavy Construction Service Engineer

Gradalls: Concrete Pumps: Power Houses: Driving Truck Cranes: Driving and Operating Fuel and Grease Trucks.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$65.99**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$105.58**

Engineer - Heavy Construction Service Mechanic

Shovels: Cranes: Draglines: Backhoes: Keystones: Pavers: Trenching Machines: Guniting Machines: Compressors (three (3) or more in Battery): Crawler Cranes- having a straight lattice boom with no attachment or luffing boom, no jib and no auxiliary attachment.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$44.09**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$70.54**

Engineer - Steel Erection Maintenance Engineers

Derrick, Travelers, Tower, Crawler Tower and Climbing Cranes

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$70.95**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$113.52**

Engineer - Steel Erection Oiler I

On a Truck Crane

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$66.10**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: \$90.30 on overtime

Shift Wage Rate: **\$105.76**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Engineer - Steel Erection Oiler II

On a Crawler Crane

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.74**

Supplemental Benefit Rate per Hour: **\$48.85**

Supplemental Note: **\$90.30** on overtime

Shift Wage Rate: **\$76.38**

Overtime Description

On jobs of more than one shift, if the next shift employee fails to report for work through any cause over which the employer has no control, the employee on duty who works the next shift continues to work at the single time rate.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Engineer - Building Work Maintenance Engineers I

Installing, repairing, maintaining, dismantling (of all equipment including: Steel Cutting and Bending Machines, Mechanical Heaters, Mine Hoists, Climbing Cranes, Tower Cranes, Linden Peine, Lorain, Liebherr, Mannes, or machines of a similar nature, Well Point Systems, Deep Well Pumps, Concrete Mixers with loading Device, Concrete Plants, Motor Generators when used for temporary power and lights), skid steer machines of a similar nature including bobcat.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$62.34**

Supplemental Benefit Rate per Hour: **\$47.94**

Supplemental Note: **\$88.48** on overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Engineer - Building Work Maintenance Engineers II

On Pumps, Generators, Mixers and Heaters

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.29**

Supplemental Benefit Rate per Hour: **\$47.94**

Supplemental Note: \$88.48 on overtime

Engineer - Building Work Oilers I

All gasoline, electric, diesel or air operated Gradealls: Concrete Pumps, Overhead Cranes in Power Houses: Their duties shall be to assist the Engineer in oiling, greasing and repairing of all machines; Driving Truck Cranes: Driving and Operating Fuel and Grease Trucks, Cherrypickers (hydraulic cranes) over 70,000 GVW, and machines of a similar nature.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$59.02**

Supplemental Benefit Rate per Hour: **\$47.94**

Supplemental Note: \$88.48 on overtime

Engineer - Building Work Oilers II

Oilers on Crawler Cranes, Backhoes, Trenching Machines, Gunite Machines, Compressors (three or more in Battery).

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$42.55**

Supplemental Benefit Rate per Hour: **\$47.94**

Supplemental Note: \$88.48 on overtime

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Christmas Day

Shift Rates

When two (2) or more shifts are employed, single time will be paid for each shift.

(Local #15)

ENGINEER - CITY SURVEYOR AND CONSULTANT

Party Chief

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$44.73**

Supplemental Benefit Rate per Hour: **\$28.36**

Supplemental Note: Overtime Benefit Rate - \$33.87 per hour (time & one half) \$39.37 per hour (double time).

Instrument Person

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$36.30**

Supplemental Benefit Rate per Hour: **\$28.36**

Supplemental Note: Overtime Benefit Rate - \$33.87 per hour (time & one half) \$39.37 per hour (double time).

Rodperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$30.97**

Supplemental Benefit Rate per Hour: **\$28.36**

Supplemental Note: Overtime Benefit Rate - \$33.87 per hour (time & one half) \$39.37 per hour (double time).

Rodperson 1st Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.00**

Supplemental Benefit Rate per Hour: **\$28.36**

Supplemental Note: Overtime Benefit Rate - \$33.87 per hour (time & one half) \$39.37 per hour (double time).

Overtime Description

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (BUILDING CONSTRUCTION) (Construction of Building Projects, Concrete Superstructures, etc.)

Field Engineer - BC Party Chief

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$68.86**

Supplemental Benefit Rate per Hour: **\$43.03**

Supplemental Note: Overtime Benefit Rate - \$60.85 per hour (time & one half) \$78.66 per hour (double time).

Field Engineer - BC Instrument Person

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$50.03**

Supplemental Benefit Rate per Hour: **\$43.03**

Supplemental Note: Overtime Benefit Rate - \$60.85 per hour (time & one half) \$78.66 per hour (double time).

Field Engineer - BC Rodperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$30.96**

Supplemental Benefit Rate per Hour: **\$43.03**

Supplemental Note: Overtime Benefit Rate - \$60.85 per hour (time & one half) \$78.66 per hour (double time).

Overtime Description

Time and one half the regular rate after a 7 hour work and time and one half the regular rate for Saturday for the first seven hours worked, Double time the regular time rate for Saturday for work performed in excess of seven hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (HEAVY CONSTRUCTION) (Construction of Roads, Tunnels, Bridges, Sewers, Building Foundations, Engineering Structures etc.)

Field Engineer - HC Party Chief

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$79.02**

Supplemental Benefit Rate per Hour: **\$46.67**

Supplemental Note: Overtime benefit rate - \$66.19 per hour (time & one half), \$85.70 per hour (double time).

Field Engineer - HC Instrument Person

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$56.62**

Supplemental Benefit Rate per Hour: **\$46.67**

Supplemental Note: Overtime benefit rate - \$66.19 per hour (time & one half), \$85.70 per hour (double time).

Field Engineer - HC Rodperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$46.66**

Supplemental Benefit Rate per Hour: **\$46.67**

Supplemental Note: Overtime benefit rate - \$66.19 per hour (time & one half), \$85.70 per hour (double time).

Field Engineer - HC Rodperson 1st Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.00**

Supplemental Benefit Rate per Hour: **\$46.67**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Note: Overtime benefit rate - \$66.19 per hour (time & one half), \$85.70 per hour (double time).

Overtime Description

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (STEEL ERECTION)

Field Engineer - Steel Erection Party Chief

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$74.95**

Supplemental Benefit Rate per Hour: **\$45.01**

Supplemental Note: Overtime benefit rate - \$63.69 per hour (time & one half), \$82.37 per hour (double time).

Field Engineer - Steel Erection Instrument Person

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$56.03**

Supplemental Benefit Rate per Hour: **\$45.01**

Supplemental Note: Overtime benefit rate - \$63.69 per hour (time & one half), \$82.37 per hour (double time).

Field Engineer - Steel Erection Rodperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$36.15**

Supplemental Benefit Rate per Hour: **\$45.01**

Supplemental Note: Overtime benefit rate - \$63.69 per hour (time & one half), \$82.37 per hour (double time).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Field Engineer - Steel Erection Rodperson 1st Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.00**

Supplemental Benefit Rate per Hour: **\$45.01**

Supplemental Note: Overtime benefit rate - \$63.69 per hour (time & one half), \$82.37 per hour (double time).

Overtime Description

Time and one half the regular rate for Saturday for the first eight hours worked.

Double time the regular rate for Saturday for work performed in excess of eight hours.

Overtime

Time and one half the regular rate after an 8 hour day.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - OPERATING

Operating Engineer - Road & Heavy Construction I

Back Filling Machines, Cranes, Mucking Machines and Dual Drum Paver.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$92.72**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$148.35**

Operating Engineer - Road & Heavy Construction II

Backhoes, Power Shovels, Hydraulic Clam Shells, Steel Erection, Moles and machines of a similar nature.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$95.96**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$153.54**

Operating Engineer - Road & Heavy Construction III

Mine Hoists (Cranes, etc. when used as Mine Hoists)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$99.01**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$158.42**

Operating Engineer - Road & Heavy Construction IV

Gradealls, Keystones, Cranes on land or water (with digging buckets), Bridge Cranes, Vermeer Cutter and machines of a similar nature, Trenching Machines.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$96.64**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$154.62**

Operating Engineer - Road & Heavy Construction V

Pile Drivers & Rigs (working alongside Dock Builder foreperson): Derrick Boats, Tunnel Shovels.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$94.76**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$151.62**

Operating Engineer - Road & Heavy Construction VI

Mixers (Concrete with loading attachment), Concrete Pavers, Cableways, Land Derricks, Power Houses (Low Air Pressure Units).

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$90.08**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$144.13**

Operating Engineer - Road & Heavy Construction VII

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Barrier Movers, Barrier Transport and Machines of a Similar Nature.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$73.00**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$116.80**

Operating Engineer - Road & Heavy Construction VIII

Utility Compressors

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$56.95**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$71.45**

Operating Engineer - Road & Heavy Construction IX

Horizontal Boring Rig

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$85.75**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$137.20**

Operating Engineer - Road & Heavy Construction X

Elevators (manually operated as personnel hoist).

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$78.92**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$126.27**

Operating Engineer - Road & Heavy Construction XI

Compressors (Portable 3 or more in battery), Driving of Truck Mounted Compressors, Well-point Pumps, Tugger Machines Well Point Pumps, Churn Drill.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$61.57**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$98.51**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Operating Engineer - Road & Heavy Construction XII

All Drills and Machines of a similar nature.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$91.03**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$145.65**

Operating Engineer - Road & Heavy Construction XIII

Concrete Pumps, Concrete Plant, Stone Crushers, Double Drum Hoist, Power Houses (other than above).

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$88.22**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$141.15**

Operating Engineer - Road & Heavy Construction XIV

Concrete Mixer

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$84.38**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$135.01**

Operating Engineer - Road & Heavy Construction XV

Compressors (Portable Single or two in Battery, not over 100 feet apart), Pumps (River Cofferdam) and Welding Machines, Push Button Machines, All Engines Irrespective of Power (Power-Pac) used to drive auxiliary equipment, Air, Hydraulic, etc.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$57.32**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: \$67.50 overtime hours

Shift Wage Rate: **\$91.71**

Operating Engineer - Road & Heavy Construction XVI

Concrete Breaking Machines, Hoists (Single Drum), Load Masters, Locomotives (over ten tons) and Dinkies over ten tons, Hydraulic Crane-Second Engineer.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$80.64**

Supplemental Benefit Rate per Hour: **\$36.90**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: \$129.02

Operating Engineer - Road & Heavy Construction XVII

On-Site concrete plant engineer, On-site Asphalt Plant Engineer, and Vibratory console.

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$81.22
Supplemental Benefit Rate per Hour: \$36.90
Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: \$129.95

Operating Engineer - Road & Heavy Construction XVIII

Tower Crane

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$116.04
Supplemental Benefit Rate per Hour: \$36.90
Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: \$185.66

Operating Engineer - Paving I

Asphalt Spreaders, Autogrades (C.M.I.), Roto/Mil

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$90.08
Supplemental Benefit Rate per Hour: \$36.90
Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: \$144.13

Operating Engineer - Paving II

Asphalt Roller

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$87.81
Supplemental Benefit Rate per Hour: \$36.90
Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: \$140.50

Operating Engineer - Paving III

Asphalt Plants

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$74.42

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$36.90**
Supplemental Note: \$67.50 overtime hours
Shift Wage Rate: **\$119.07**

Operating Engineer - Concrete I

Cranes

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$96.22**
Supplemental Benefit Rate per Hour: **\$36.90**
Supplemental Note: \$67.50 overtime hours

Operating Engineer - Concrete II

Compressors

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$57.75**
Supplemental Benefit Rate per Hour: **\$36.90**
Supplemental Note: \$67.50 overtime hours

Operating Engineer - Concrete III

Micro-traps (Negative Air Machines), Vac-All Remediation System.

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$77.14**
Supplemental Benefit Rate per Hour: **\$36.90**
Supplemental Note: \$67.50 overtime hours

Operating Engineer - Steel Erection I

Three Drum Derricks

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$100.14**
Supplemental Benefit Rate per Hour: **\$36.05**
Supplemental Note: \$65.90 overtime hours
Shift Wage Rate: **\$160.22**

Operating Engineer - Steel Erection II

Cranes, 2 Drum Derricks, Hydraulic Cranes, Fork Lifts and Boom Trucks.

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$96.26**
Supplemental Benefit Rate per Hour: **\$36.05**
Supplemental Note: \$65.90 overtime hours
Shift Wage Rate: **\$154.02**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Operating Engineer - Steel Erection III

Compressors, Welding Machines.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$56.34**

Supplemental Benefit Rate per Hour: **\$36.05**

Supplemental Note: **\$65.90** overtime hours

Shift Wage Rate: **\$90.14**

Operating Engineer - Steel Erection IV

Compressors - Not Combined with Welding Machine. (Public Works Only)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$53.69**

Supplemental Benefit Rate per Hour: **\$36.05**

Supplemental Note: **\$65.90** overtime hours

Shift Wage Rate: **\$85.90**

Operating Engineer - Building Work I

Forklifts, Plaster (Platform machine), Plaster Bucket, Concrete Pump and all other equipment used for hoisting material.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$73.52**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

Operating Engineer - Building Work II

Compressors, Welding Machines (Cutting Concrete-Tank Work), Paint Spraying, Sandblasting, Pumps (with the exclusion of Concrete Pumps), All Engines irrespective of Power (Power-Pac) used to drive Auxiliary Equipment, Air, Hydraulic, Jacking System, etc.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$55.18**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

Operating Engineer - Building Work III

Double Drum

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$91.26**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Operating Engineer - Building Work IV

Stone Derrick, Cranes, Hydraulic Cranes Boom Trucks.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$96.60**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

Operating Engineer - Building Work V

Dismantling and Erection of Cranes, Relief Engineer.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$81.62**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

Operating Engineer - Building Work VI

4 Pole Hoist, Single Drum Hoists.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$80.76**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

Operating Engineer - Building Work VII

Rack & Pinion and House Cars

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$64.33**

Supplemental Benefit Rate per Hour: **\$36.90**

Supplemental Note: **\$67.50** overtime hours

For New House Car projects Wage Rate per Hour **\$51.45**

For New House Car projects: Supplemental Benefit overtime hours: **\$52.20**

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

For House Cars and Rack & Pinion only: Overtime paid at time and one-half for all hours in excess of eight hours in a day, Saturday, Sunday and Holidays worked.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

When two (2) or more shifts are employed, single time will be paid for each shift.
For Steel Erection Only: Shifts may be worked at the single time rate at other than the regular working hours (8:00 A.M. to 4:30 P.M.) on the following work ONLY: Heavy construction jobs on work below the street level, over railroad tracks and on building jobs.

(Operating Engineer Local #14)

FLAGGER

Flagger and Traffic Control worker to be paid at the rate of the journeyperson or apprentice in the trade performing the underlying work. If the trade performing the underlying work does not regularly employ a Flagger or Traffic Control worker, then one of the following titles must be used:

Laborer - Heavy & Highway
Laborer - Paver & Roadbuilder
Laborer - Paver & Roadbuilder Line Striping (Roadway)

FLOOR COVERER

(Interior vinyl composition tile, sheath vinyl linoleum and wood parquet tile including site preparation and synthetic turf not including site preparation)

Floor Coverer

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$55.05**

Supplemental Benefit Rate per Hour: **\$47.88**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Day before Christmas

Christmas Day

Day before New Year's Day

Shift Rates

Two shifts may be utilized with the first shift working 8 a.m. to the end of the shift at straight time rate of pay. The wage rate for the second shift consisting of 7 hours shall be paid at 114.29% of straight time wage rate. The wage rate for the second shift consisting of 8 hours shall be paid 112.5% of the straight time wage rate. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, the rule for the second shift will apply.

(Carpenters District Council)

GLAZIER

(New Construction, Remodeling, and Alteration)

Glazier

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$49.00**

Supplemental Benefit Rate per Hour: **\$55.77**

Overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Labor Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #1281)

GLAZIER - REPAIR & MAINTENANCE

(For the Installation of Glass - All repair and maintenance work on a particular building.)

Craft Jurisdiction for repair, maintenance and fabrication

Plate glass replacement, Storm windows and storm doors, Herculite door repairs, Door closer repairs, Glass tinting.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$27.45

Supplemental Benefit Rate per Hour: \$27.93

Overtime

Time and one half the regular rate after an 8 hour day.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on the following holiday(s).
Time and one half the regular hourly rate after 40 straight time hours in any work week.

Paid Holidays

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Day after Thanksgiving

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Local #1281)

HAZARDOUS MATERIAL HANDLER

(Removal, abatement, encapsulation or decontamination of asbestos, lead, mold, or other toxic or hazardous waste/materials)

Handler

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$39.00**

Supplemental Benefit Rate per Hour: **\$21.30**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Time and one half the regular hourly rate after 40 straight time hours in any work week.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Easter

Paid Holidays

None

(Local #78 and Local #12A)

HEAT AND FROST INSULATOR

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Heat & Frost Insulator

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$70.96**

Supplemental Benefit Rate per Hour: **\$36.06**

Overtime Description

Supplemental Benefit contributions are to be made at the applicable overtime rates.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Triple time the regular rate for work on the following holiday(s).

Labor Day

Paid Holidays

None

Shift Rates

The first shift shall work seven hours at the regular straight time rate. The second and third shift shall work seven hours the regular straight time hourly rate plus a fourteen percent wage and benefit premium. There must be a first shift to work the second shift, and a second shift to work the third shift. Off-hour jobs in occupied buildings may be worked on weekdays with an increment of one-dollar (\$1.00) per hour and eight (8) hours pay for seven (7) hours worked.

(Local #12) (BCA)

HOUSE WRECKER (TOTAL DEMOLITION)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

House Wrecker - Tier A

On all work sites the first, second, eleventh and every third House Wrecker thereafter will be Tier A House Wreckers (i.e. 1st, 2nd, 11th, 14th etc). Other House Wreckers may be Tier B House Wreckers.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$39.48**

Supplemental Benefit Rate per Hour: **\$31.92**

House Wrecker - Tier B

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$28.71**

Supplemental Benefit Rate per Hour: **\$24.33**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Mason Tenders District Council)

IRON WORKER - ORNAMENTAL

Iron Worker - Ornamental

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.65**

Supplemental Benefit Rate per Hour: **\$65.75**

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime Description

Time and one half the regular rate after a 7 hour day for a maximum of two hours on any regular work day (the 8th and 9th hour) and double time shall be paid for all work on a regular work day thereafter. Time and one half the regular rate for Saturday for the first seven hours of work and double time should be paid for all work on a Saturday thereafter. Four (4), ten (10) hour days may be worked at straight time, Monday to Thursday.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

When two or three shifts are employed on a job, Monday through Friday, each shift will be paid eight (8) hours at the straight time rate for eight (8) hours of work; at time and one-half the regular straight time rate for the first two (2) hours of overtime worked beyond eight (8) hours; and at double time for all work thereafter. When it is not possible to conduct alteration or repair work during regular working hours in a building occupied by tenants, eight (8) hours will be paid at straight time rate for seven (7) hours of work, and all overtime shall be paid at time and one-half the regular straight time rates. On Saturday, Sundays and Holidays, time and one-half the regular straight time rate shall be paid for all work up to seven (7) hours and double time shall be paid for all work thereafter.

(Local #580)

IRON WORKER - STRUCTURAL

Iron Worker - Structural

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$58.20**

Supplemental Benefit Rate per Hour: **\$89.27**

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Overtime Description

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Monday through Friday- the first eight hours are paid at straight time, the 9th and 10th hours are paid at time and one-half the regular rate, all additional weekday overtime is paid at double the regular rate. Saturdays- the first eight hours are paid at time and one-half the regular rate, double time thereafter. Sunday-all shifts are paid at double time. Four Days a week at Ten (10) hours straight time is allowed.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.
1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Monday through Friday - First Shift: First eight hours are paid at straight time, the 9th & 10th hours are paid at time and a half, double time paid thereafter. Second and third Shifts: First eight hours are paid at time and one-half, double time thereafter. Saturdays: All shifts, first eight hours paid at time and one-half, double time thereafter: Sunday all shifts are paid at double time.

Four (4), ten (10) hour days may be worked at straight time during a week, Monday thru Thursday.

(Local #40 & #361)

LABORER – HEAVY & HIGHWAY

(Foundation, Concrete, Excavating, Street Pipe Layer and Common)

Laborer - Heavy & Highway

Excavation and foundation work for buildings, heavy construction, street pipe laying, engineering work, and hazardous waste removal in connection with the above work. Landscaping tasks in connection with heavy construction work, engineering work and building projects. Projects include, but are not limited to pollution plants, sewers, parks, subways, bridges, highways, etc. Includes flagger and traffic control worker associated with heavy & highway projects or any projects not covered by an underlying trade or Laborer - Paver & Roadbuilder or Laborer - Paver & Roadbuilder Line Striping.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.00**

Supplemental Benefit Rate per Hour: **\$54.03**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

Paid Holidays

Labor Day

Thanksgiving Day

Shift Rates

When two shifts are employed, single time rate shall be paid for each shift. When three shifts are found necessary, each shift shall work seven and one half hours (7 ½), but shall be paid for eight (8) hours of labor, and be permitted one half hour for lunch.

(Local #731)

LABORER - PAVER & ROADBUILDER

Laborer - Paver & Roadbuilder

Paving and road construction work, regardless of material used, including but not limited to preparation of job sites, removal of old surfaces, asphalt and/or concrete, by whatever method, including but not limited to milling; laying of concrete; laying of asphalt for temporary, patchwork, and utility paving (but not production paving); site preparation and incidental work for installation of rubberized materials and similar surfaces; installation and repair of temporary construction fencing; slurry/seal coating, paving stones, maintenance of safety surfaces; play equipment installation, and other related work. Includes flagger and traffic/pedestrian control worker associated with such projects.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.48**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$53.55**

Supplemental Note: For time and one half overtime - \$58.18 For double overtime - \$62.80

Paver & Roadbuilder - Formsetter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$49.35**

Supplemental Benefit Rate per Hour: **\$53.55**

Supplemental Note: For time and one half overtime - \$58.18 For double overtime - \$62.80

Production Paver & Roadbuilder - Shoveler

General laborer (except removal of surfaces - see Paver and Roadbuilder-Laborer) including but not limited to tamper, AC paint and liquid tar work.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.48**

Supplemental Benefit Rate per Hour: **\$53.55**

Supplemental Note: For time and one half overtime - \$58.18 For double overtime - \$62.80

Production Paver & Roadbuilder - Raker

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$49.35**

Supplemental Benefit Rate per Hour: **\$53.55**

Supplemental Note: For time and one half overtime - \$58.18 For double overtime - \$62.80

Production Paver & Roadbuilder - Screed Person

(Production paving is asphalt paving when using a paving machine or on a project where a paving machine is traditionally used)

Adjustment of paving machinery on production paving jobs.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$49.95**

Supplemental Benefit Rate per Hour: **\$53.55**

Supplemental Note: For time and one half overtime - \$58.18 For double overtime - \$62.80

Overtime Description

If an employee works New Year's Day or Christmas Day, they receive the single time rate plus 25%.

For Paid Holidays: Holiday pay for all holidays shall be prorated based two hours per day for each day worked in the holiday week, not to exceed 8 hours of holiday pay.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day

Paid Holidays

Memorial Day
Independence Day
Labor Day
Thanksgiving Day

Shift Rates

When two shifts are employed, the work period for each shift shall be a continuous eight (8) hours. When three shifts are employed, each shift will work seven and one half (7 ½) hours but will be paid for eight (8) hours at the straight time rate since only one half (1/2) hour is allowed for meal time.

When two or more shifts are employed, single time will be paid for each shift.

(Local #1010)

LABORER - PAVER & ROADBUILDER LINE STRIPING (ROADWAY)

(Painting of traffic lines on roadways)

Striping - Machine Operator

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$41.00**

Supplemental Benefit Rate per Hour: **\$19.27**

Supplemental Note: For time and one half overtime - \$20.52 For double overtime - \$21.77

Lineperson (Thermoplastic)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.00**

Supplemental Benefit Rate per Hour: **\$19.27**

Supplemental Note: For time and one half overtime - \$20.52 For double overtime - \$21.77

Laborer Striping Assistant & Traffic Safety

Includes flagger and traffic control worker associated with line striping projects.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$39.00**

Supplemental Benefit Rate per Hour: **\$19.27**

Supplemental Note: For time and one half overtime - \$20.52 For double overtime - \$21.77

Overtime Description

For Paid Holidays: Employees will only receive Holiday Pay for holidays not worked if said employee worked both the regularly scheduled workday before and after the holiday.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

(Local #1010)

LANDSCAPING

(Landscaping tasks, such as tree pruning, tree removing and spraying in connection with Green Infrastructure maintenance and the planting of street trees and trees in City parks, but not when such activities are performed as part of construction or reconstruction projects.)

Landscaper (Year 6 and above)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$37.77**

Supplemental Benefit Rate per Hour: **\$18.05**

Landscaper (Year 3 - 5)

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$36.56**
Supplemental Benefit Rate per Hour: **\$18.05**

Landscaper (up to 3 years)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$33.55**
Supplemental Benefit Rate per Hour: **\$18.05**

Groundperson

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$33.55**
Supplemental Benefit Rate per Hour: **\$18.05**

Tree Remover / Pruner

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$43.81**
Supplemental Benefit Rate per Hour: **\$18.05**

Landscaper Sprayer (Pesticide Applicator)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$31.75**
Supplemental Benefit Rate per Hour: **\$18.05**

Watering - Plant Maintainer

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$25.69**
Supplemental Benefit Rate per Hour: **\$18.05**

Overtime Description

For all overtime work performed, supplemental benefits shall include an additional seventy-five (\$0.75) cents per hour.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Christmas Day

Shift Rates

Work performed on a 4pm to 12am shift has a 15% differential. Work performed on a 12am to 8am shift has a 20% differential.

(Local #175)

MARBLE MECHANIC

Marble Setter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$58.92**

Supplemental Benefit Rate per Hour: **\$44.01**

Marble Finisher

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$45.44**

Supplemental Benefit Rate per Hour: **\$41.06**

Marble Polisher

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$44.47**

Supplemental Benefit Rate per Hour: **\$33.96**

Marble Maintenance Finisher

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$27.72**

Supplemental Benefit Rate per Hour: **\$15.31**

Overtime Description

Supplemental Benefit contributions are to be made at the applicable overtime rates.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #7)

MASON TENDER

Building Laborer

Mason Tender

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$41.45

Supplemental Benefit Rate per Hour: \$33.24

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Shift Rates

The employer may work two (2) shifts with the first shift at the straight time wage rate and the second shift receiving eight (8) hours paid for seven (7) hours work at the straight time wage rate. When it is not possible to conduct alteration work during regular working hours in a building occupied by tenants, the rule for the second shift will apply.

(Local #79)

MASON TENDER (INTERIOR DEMOLITION WORKER)

Mason Tender Tier A

Tier A Interior Demolition Worker performs all burning, chopping, and other technically skilled tasks related to interior demolition work.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$38.00**

Supplemental Benefit Rate per Hour: **\$26.54**

Mason Tender Tier B

Tier B Interior Demolition Worker performs manual work and work incidental to demolition work, such as loading and carting of debris from the work site to an area where it can be loaded in to bins/trucks for removal. Also performs clean-up of the site when demolition is completed.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$27.19**

Supplemental Benefit Rate per Hour: **\$20.86**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

(Local #79)

METALLIC LATHER

Metallic Lather

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$46.45**

Supplemental Benefit Rate per Hour: **\$54.80**

Supplemental Note: For time and one half overtime - \$66.55 For double overtime - \$86.60

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Off-shift work outside of normal working hours shall receive straight time rate plus \$12 per hour for the first eight (8) hours.

(Local #46)

MILLWRIGHT

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Millwright

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$59.35**

Supplemental Benefit Rate per Hour: **\$58.67**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Second and third shifts receives the straight time rate of pay plus fifteen (15%) percent allowing for one half hour for a meal. There must be a first shift to work a second and third shift. All additional hours worked shall be paid at the time and one-half rate of pay plus fifteen (15%) percent for weekday hours.

(Local #740)

MOSAIC MECHANIC

Mosaic Mechanic - Mosaic & Terrazzo Mechanic

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$53.98**

Supplemental Benefit Rate per Hour: **\$47.12**

Mosaic Mechanic - Mosaic & Terrazzo Finisher

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$52.37**

Supplemental Benefit Rate per Hour: **\$47.12**

Mosaic Mechanic - Machine Operator Grinder

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$52.37**

Supplemental Benefit Rate per Hour: **\$47.12**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Good Friday

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Local #7)

PAINTER

Painter - Brush & Roller

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$44.00**

Supplemental Benefit Rate per Hour: **\$42.46**

Supplemental Note: **\$50.56** on overtime

Spray & Scaffold / Decorative / Sandblast

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.00**

Supplemental Benefit Rate per Hour: **\$42.46**

Supplemental Note: \$50.56 on overtime

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(District Council of Painters #9)

PAINTER - BRIDGE & STRUCTURAL STEEL

Painters on Structural Steel

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$56.00**

Supplemental Benefit Rate per Hour: **\$52.78**

Painter - Power Tool

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$63.00**

Supplemental Benefit Rate per Hour: **\$52.78**

Overtime Wage Rate: \$6.50 above the "Painters on Structural Steel" overtime rate.

Overtime Description

Supplemental Benefits shall be paid for each hour worked, up to forty (40) hours per week for the period of May 1st to November 15th or up to fifty (50) hours per week for the period of November 16th to April 30th.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Second shift is paid at regular hourly wage rates plus a ten percent (10%) differential. There must be a first shift to work a second shift.

(Local #806)

PAINTER - METAL POLISHER

METAL POLISHER

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$34.00**

Supplemental Benefit Rate per Hour: **\$12.36**

METAL POLISHER - NEW CONSTRUCTION

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$34.95**

Supplemental Benefit Rate per Hour: **\$12.36**

METAL POLISHER - SCAFFOLD OVER 34 FEET

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$37.50**

Supplemental Benefit Rate per Hour: **\$12.36**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

ASSISTANT METAL POLISHER

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$26.50**

Supplemental Benefit Rate per Hour: **\$11.92**

ASSISTANT METAL POLISHER - NEW CONSTRUCTION

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$27.25**

Supplemental Benefit Rate per Hour: **\$11.92**

ASSISTANT METAL POLISHER - SCAFFOLD OVER 34 FEET

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$29.00**

Supplemental Benefit Rate per Hour: **\$11.92**

Overtime Description

All work performed on Saturdays shall be paid at time-in-a half. The exception being; for suspended scaffold work and work deemed as a construction project; an eight (8) hour shift lost during the week due to circumstances beyond the control of the employer, up to a maximum of eight (8) hours per week, may be worked on Saturday at the straight time rate.

Holiday Pay

Only employees who have completed one year of service, including any trial period shall be eligible for holiday pay.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Triple time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Four Days a week at Ten (10) hours straight a day.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Local 8A-28A

PAINTER - SIGN

Sign Painter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.07**

Supplemental Benefit Rate per Hour: **\$27.25**

Assistant Sign Painter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$40.85**

Supplemental Benefit Rate per Hour: **\$25.90**

Overtime Description

If any employee is required to work on any of the paid holidays then the employee shall receive double time rate of wages as well as the holiday pay for that day.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Vacation

At least 1 year of employment.....1 week

2 years or more of employment.....2 weeks

8 years or more of employment.....3 weeks

(Local #8A-28A)

PAPERHANGER

Paperhanger

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.02**

Supplemental Benefit Rate per Hour: **\$43.14**

Supplemental Note: Supplemental benefits are to be paid at the appropriate straight time and overtime rate.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

Evening shift - 4:30 P.M. to 12:00 Midnight (regular rate of pay); any work performed before 7:00 A.M. shall be at time and one half the regular base rate of pay.

(District Council of Painters #9)

PAVER AND ROADBUILDER

see LABORER - PAVER AND ROADBUILDER

PLASTERER

Plasterer

Effective Period: 7/1/2024 - 7/31/2024

Wage Rate per Hour: **\$52.10**

Supplemental Benefit Rate per Hour: **\$25.35**

Effective Period: 8/1/2024 - 6/30/2025

Wage Rate per Hour: **\$52.99**

Supplemental Benefit Rate per Hour: **\$26.10**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

When it is not possible to conduct work during regular working hours (between 6:30am and 4:30pm), a shift differential shall be paid at the regular hourly rate plus a twelve percent (12%) per hour differential. Workers on shift work shall be allowed a paid one-half hour meal break.

(Local #262)

PLASTERER - TENDER

Plasterer - Tender

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$41.45**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$33.24**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

When work commences outside regular work hours, workers receive an hour additional (differential) wage and supplement payment. Eight hours pay for seven hours work or nine hours pay for eight hours work.

(Mason Tenders District Council)

PLUMBER

Plumber

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$74.95**

Supplemental Benefit Rate per Hour: **\$43.00**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Plumber - Temporary Services

Temporary Services - When there are no Plumbers on the job site, there may be three shifts designed to cover the entire twenty-four hour period, including weekends if necessary, at the following rate straight time.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$60.04**

Supplemental Benefit Rate per Hour: **\$34.32**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime Description

Where the plumbing contract price is one and one half million dollars (\$1,500,000.00) or less, double time the regular rate after an 8 hour day.

Overtime

Double time the regular rate after a 7 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday.

50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)

(Mechanical Equipment and Service work shall include any repair and/or replacement of the present plumbing system.)

Plumber

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.20**

Supplemental Benefit Rate per Hour: **\$21.36**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Plumbers Local # 1)

PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$52.07**

Supplemental Benefit Rate per Hour: **\$30.82**

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday.
50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

PLUMBER: PUMP & TANK

Oil Trades (Installation and Maintenance)

Plumber - Pump & Tank

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$73.00**

Supplemental Benefit Rate per Hour: **\$32.81**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

All work outside the regular workday (8:00 A.M. to 3:30 P.M.) is to be paid at time and one half the regular hourly rate

(Plumbers Local #1)

POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER

(Exterior Building Renovation)

Journeyperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$63.43**

Supplemental Benefit Rate per Hour: **\$31.50**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:00 P.M.) is to be paid at time and one half the regular rate. However, the employer may establish one (1) or two (2) shifts starting at or after 4:00 P.M. to be paid at the regular hourly rate plus a 10% differential. For projects bid and performed after July 1, 2023, the first shift shall be paid at the regular hourly rate plus a 5% differential.

(Bricklayer District Council)

ROOFER

Roofer

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.50**

Supplemental Benefit Rate per Hour: **\$38.81**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Second shift - Regular hourly rate plus a 10% differential. Third shift - Regular hourly rate plus a 15% differential. There must be a first shift to work the second shift, and a second shift to work the third shift. All other work outside the regular work day (an eight hour workday between the hours of 5:00 A.M. and 4:00 P.M.) is to be paid at time and one half the regular rate.

(Local #8)

SHEET METAL WORKER

Sheet Metal Worker

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$53.60**

Supplemental Benefit Rate per Hour: **\$58.43**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Sheet Metal Worker - Fan Maintenance

(The temporary operation of fans or blowers in new or existing buildings for heating and/or ventilation, and/or air conditioning prior to the completion of the project.)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$42.88**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$58.43

Sheet Metal Worker - Duct Cleaner

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$19.57

Supplemental Benefit Rate per Hour: \$12.72

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

Work that can only be performed outside regular working hours (eight hours of work between 7:30 A.M. and 3:30 P.M.) - First shift (work between 3:30 P.M. and 11:30 P.M.) - 10% differential above the established hourly rate.

Second shift (work between 11:30 P.M. and 7:30 A.M.) - 15% differential above the established hourly rate.

For Fan Maintenance: On all full shifts of fan maintenance work the straight time hourly rate of pay will be paid for each shift, including nights, Saturdays, Sundays, and holidays.

(Local #28)

SHEET METAL WORKER - SPECIALTY
(Decking & Siding)

Sheet Metal Specialty Worker

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

The first worker to perform this work must be paid at the rate of the Sheet Metal Worker. The second and third workers shall be paid the Specialty Worker Rate. The ratio of One Sheet Metal Worker, then Two Specialty Workers shall be utilized thereafter.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$50.10**

Supplemental Benefit Rate per Hour: **\$30.04**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Local #28)

SHIPYARD WORKER

Shipyard Mechanic - First Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$31.50**

Supplemental Benefit Rate per Hour: **\$3.98**

Shipyard Mechanic - Second Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.86**

Supplemental Benefit Rate per Hour: **\$3.77**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Shipyards Laborer - First Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.85**

Supplemental Benefit Rate per Hour: **\$3.78**

Shipyards Laborer - Second Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$18.87**

Supplemental Benefit Rate per Hour: **\$3.72**

Shipyards Dockhand - First Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$24.20**

Supplemental Benefit Rate per Hour: **\$3.77**

Shipyards Dockhand - Second Class

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$19.37**

Supplemental Benefit Rate per Hour: **\$3.63**

Overtime Description

Work performed on holiday is paid double time the regular hourly wage rate plus holiday pay.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular hourly rate after 40 straight time hours in any work week.

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Based on Survey Data

SIGN ERECTOR

(Sheet Metal, Plastic, Electric, and Neon)

Sign Erector

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$58.00**

Supplemental Benefit Rate per Hour: **\$63.44**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Time and one half the regular hourly rate is to be paid for all hours worked outside the regular workday either (7:00 A.M. through 2:30 P.M.) or (8:00 A.M. through 3:30 P.M.)

(Local #137)

STEAMFITTER

Steamfitter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$61.80**

Supplemental Benefit Rate per Hour: **\$61.14**

Supplemental Note: Overtime supplemental benefit rate: \$121.54

Steamfitter -Temporary Services

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$46.97**

Supplemental Benefit Rate per Hour: **\$49.65**

Overtime Description

Double time after a 7 hour day except for Temporary Services.

Overtime

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

May be performed outside of the regular workday except Saturday, Sunday and Holidays. When shift work is performed the wage rate for regular time worked is a 15% percent premium on wage and 15% percent premium on supplemental benefits.

Local 638

STEAMFITTER - REFRIGERATION AND AIR CONDITIONER

(Maintenance and Installation Service Person)

Refrigeration and Air Conditioner Mechanic

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$46.10**

Supplemental Benefit Rate per Hour: **\$21.96**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Independence Day

Labor Day

Veteran's Day

Thanksgiving Day

Christmas Day

Double time and one half the regular rate for work on the following holiday(s).

Martin Luther King Jr. Day

President's Day

Memorial Day

Columbus Day

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

(Local #638-B)

STONE MASON - SETTER

Stone Mason - Setter

(Assisted by Derrickperson and Rigger)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$57.35**

Supplemental Benefit Rate per Hour: **\$55.47**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

Shift Rates

For all work outside the regular workday (8:00 A.M. to 3:30 P.M. Monday through Friday), the pay shall be straight time plus a ten percent (10%) differential.

(Bricklayers District Council)

TAPER

Drywall Taper

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.47**

Supplemental Benefit Rate per Hour: **\$33.51**

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Good Friday
Memorial Day
Independence Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

(Local #1974)

TELECOMMUNICATION WORKER

(Install/maintain/repair telecommunications cables carrying data, video, and/or voice except for installation on building construction/alteration/renovation projects.)

Telecommunication Worker

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$47.03**

Supplemental Benefit Rate per Hour: **\$23.15**

Supplemental Note: The above rate applies for Manhattan, Bronx, Brooklyn, Queens. \$22.84 for Staten Island only.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Lincoln's Birthday
Washington's Birthday
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Veteran's Day
Thanksgiving Day
Christmas Day

Paid Holidays

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Lincoln's Birthday
Washington's Birthday
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Veteran's Day
Thanksgiving Day
Christmas Day

Employees have the option of observing either Martin Luther King's Birthday or the day after Thanksgiving instead of Lincoln's Birthday

Shift Rates

For any workday that starts before 8A.M. or ends after 6P.M. there is a 10% differential for the applicable worker's hourly rate.

Vacation

After 6 months.....one week.
After 12 months but less than 7 years.....two weeks.
After 7 or more but less than 15 years.....three weeks.
After 15 years or more but less than 25 years.....four weeks.

(C.W.A.)

TILE FINISHER

Tile Finisher

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$49.46**

Supplemental Benefit Rate per Hour: **\$32.86**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays
None

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

TILE LAYER - SETTER

Tile Layer - Setter

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$64.40**

Supplemental Benefit Rate per Hour: **\$36.01**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

TIMBERPERSON

Timberperson

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$55.59**

Supplemental Benefit Rate per Hour: **\$55.41**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate. Benefits for off-shift work shall be paid at the straight time rate.

(Local #1556)

TUNNEL WORKER

Blasters, Mucking Machine Operators (Compressed Air Rates)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$73.50**

Supplemental Benefit Rate per Hour: **\$64.93**

Tunnel Workers (Compressed Air Rates)

Includes shield driven liner plate portions or solidification portions work (8 hour shift) during excavation phase.

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$70.88**

Supplemental Benefit Rate per Hour: **\$62.88**

Top Nipper (Compressed Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$69.69**

Supplemental Benefit Rate per Hour: **\$61.64**

Outside Lock Tender, Outside Gauge Tender, Muck Lock Tender (Compressed Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$68.30**

Supplemental Benefit Rate per Hour: **\$60.64**

Bottom Bell & Top Bell Signal Person: Shaft Person (Compressed Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$68.30**

Supplemental Benefit Rate per Hour: **\$60.64**

Changehouse Attendant: Powder Watchperson (Compressed Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$60.18**

Supplemental Benefit Rate per Hour: **\$56.85**

Blasters (Free Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$70.12**

Supplemental Benefit Rate per Hour: **\$62.33**

Tunnel Workers (Free Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$67.08**

Supplemental Benefit Rate per Hour: **\$59.73**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

All Others (Free Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$62.01**

Supplemental Benefit Rate per Hour: **\$55.28**

Microtunneling (Free Air Rates)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$53.66**

Supplemental Benefit Rate per Hour: **\$47.78**

Overtime Description

For work performed during excavation and primary concrete tunnel lining phases - Double time the regular rate after an 8 hour day and Saturday, Sunday and on the following holiday(s) listed below.

For Repair-Maintenance Work on Existing Equipment and Facilities - Time and one half the regular rate after a 8 hour day, Saturday, Sunday and double time the regular rate for work on the following holiday(s) listed below.

For Small-Bore Micro Tunneling Machines - Time and one-half the regular rate shall be paid for all overtime.

For work not listed above - Time and one half the regular rate after an 8 hour day and Saturday and double time the regular rate on Sunday and on the following holiday(s) listed below.

Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

(Local #147)

UTILITY LOCATOR

(Locate & mark underground utilities including gas for street excavation and utility line repairs)

Utility Locator (Year 7 and above)

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$31.56**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Year 5 - 6)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$22.85**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Year 4)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$21.54**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Year 3)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$20.30**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Year 2)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$19.13**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Year 1)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$18.04**

Supplemental Benefit Rate per Hour: **\$1.43**

Utility Locator (Up to 1 year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$17.00**

Supplemental Benefit Rate per Hour: **\$1.43**

Supplemental Note: No benefits for the first 90 days of employment.

Overtime

Time and one half the regular rate for work on the following holiday(s).

Time and one half the regular hourly rate after 40 straight time hours in any work week.

Paid Holidays

New Year's Day

Memorial Day

Independence Day

Thanksgiving Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION WORKER PREVAILING WAGE SCHEDULE

Christmas Day

Shift Rates

10% shift differential to employees working any shift starting between noon and 5 AM.

Vacation

For up to 1 year 0 hours
For year 1 - 2 48 hours per year
For year 3 - 9 96 hours per year
For year 10 or more 144 hours per year

Sick Days:

For up to 1 year employee receives 40 hours paid sick leave.
For year 1 employee earns 2 hours of paid sick leave for every 100 overtime hours worked.
For year 2 - 9 years employee earns 4 hours of paid sick leave for every 100 overtime hours worked.
For year 10 or more employee earns 6 hours of paid sick leave for every 100 overtime hours worked.

(C.W.A.)

WELDER

**WELDER AND FIREWATCH TO BE PAID AT THE RATE OF THE
JOURNEYPERSON OR REGISTERED APPRENTICE IN THE TRADE
PERFORMING THE WORK.**

OFFICE OF THE COMPTROLLER

CITY OF NEW YORK

**CONSTRUCTION APPRENTICE
PREVAILING WAGE SCHEDULE**

Pursuant to Labor Law § 220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant and registered with the New York State Department of Labor, may be paid at the apprentice rates in this schedule. Apprentices who are not so registered must be paid as journey persons in accordance with the trade classification of the work they actually performed.

Apprentice ratios are established to ensure the proper safety, training and supervision of apprentices. A ratio establishes the number of journey workers required for each apprentice in a program and on a job site. Ratios are interpreted as follows: in the case of a 1:1, 1:4 ratio, there must be one journey worker for the first apprentice, and four additional journey workers for each subsequent apprentice.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
BOILERMAKER.....	3
BRICKLAYER.....	4
CARPENTER.....	5
CARPENTER - HIGH RISE CONCRETE FORMS.....	5
CEMENT AND CONCRETE WORKER.....	6
CEMENT MASON.....	7
DERRICKPERSON & RIGGER (STONE).....	7
DOCKBUILDER/PILE DRIVER.....	8
ELECTRICIAN.....	9
ELEVATOR CONSTRUCTOR.....	11
ELEVATOR REPAIR & MAINTENANCE.....	12
ENGINEER.....	13
ENGINEER - OPERATING.....	13
FLOOR COVERER.....	14
GLAZIER.....	15
HAZARDOUS MATERIAL HANDLER.....	15
HEAT & FROST INSULATOR.....	16
HOUSE WRECKER.....	17
IRON WORKER - ORNAMENTAL.....	17
IRON WORKER - STRUCTURAL.....	18
LABORER - HEAVY & HIGHWAY.....	19
LABORER - PAVER & ROADBUILDER.....	19
LABORER - PAVER AND ROADBUILDER - LINE STRIPING (ROADWAY).....	20
MARBLE MECHANICS.....	20
MASON TENDER.....	22
MASON TENDER (INTERIOR DEMOLITION WORKER).....	23
METALLIC LATHER.....	24
MILLWRIGHT.....	24
PAINTER.....	25
PAINTER - BRIDGE & STRUCTURAL STEEL.....	26
PAINTER - METAL POLISHER.....	26
PLASTERER.....	27
PLASTERER - TENDER.....	28
PLUMBER.....	28
POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER.....	30
ROOFER.....	30
SHEET METAL WORKER.....	31
SIGN ERECTOR.....	32
STEAMFITTER.....	34
STEAMFITTER - REFRIGERATION & AIR CONDITIONER.....	34
STONE MASON - SETTER.....	35
TAPER.....	36
TILE LAYER - SETTER.....	37
TIMBERPERSON.....	38

BOILERMAKER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Boilermaker (First Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$34.95

Boilermaker (Second Year: 1st Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$36.99

Boilermaker (Second Year: 2nd Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$39.06

Boilermaker (Third Year: 1st Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$41.09

Boilermaker (Third Year: 2nd Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 85% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$43.17

Boilermaker (Fourth Year: 1st Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 90% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$45.23

Boilermaker (Fourth Year: 2nd Six Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$47.28

(Local #5)

BRICKLAYER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Bricklayer (First 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

Bricklayer (Second 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

Bricklayer (Third 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

Bricklayer (Fourth 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

Bricklayer (Fifth 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 90% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

Bricklayer (Sixth 750 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$27.60

(Bricklayer District Council)

CARPENTER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Carpenter (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour For Building Apprentice: \$22.20

Supplemental Benefit Rate Per Hour For Building Apprentice: \$17.70

Wage Rate Per Hour For Heavy Apprentice: \$26.98

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$37.89

Carpenter (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour For Building Apprentice: \$25.20

Supplemental Benefit Rate Per Hour For Building Apprentice: \$19.20

Wage Rate Per Hour For Heavy Apprentice: \$32.58

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$37.89

Carpenter (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour For Building Apprentice: \$29.45

Supplemental Benefit Rate Per Hour For Building Apprentice: \$22.80

Wage Rate Per Hour For Heavy Apprentice: \$40.96

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$37.89

Carpenter (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour For Building Apprentice: \$37.33

Supplemental Benefit Rate Per Hour For Building Apprentice: \$24.80

Wage Rate Per Hour For Heavy Apprentice: \$49.35

Supplemental Benefit Rate Per Hour For Heavy Apprentice: \$37.89

(Carpenters District Council)

CARPENTER - HIGH RISE CONCRETE FORMS

(Ratio of Apprentice to Journeyman: 1 to 1, 2 to 5)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Carpenter - High Rise (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$18.27**

Supplemental Benefit Rate per Hour: **\$17.55**

Carpenter - High Rise (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$24.70**

Supplemental Benefit Rate per Hour: **\$17.68**

Carpenter - High Rise (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$31.28**

Supplemental Benefit Rate per Hour: **\$17.81**

Carpenter - High Rise (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$38.90**

Supplemental Benefit Rate per Hour: **\$17.96**

(Carpenters District Council)

CEMENT AND CONCRETE WORKER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Cement & Concrete Worker (First 1333 hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 53% of Journeyman's rate

Supplemental Benefit Rate Per Hour: **\$16.44**

Cement & Concrete Worker (Second 1333 hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 69% of Journeyman's rate

Supplemental Benefit Rate Per Hour: **\$21.72**

Cement & Concrete Worker (Last 1334 hours)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 85% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$23.00

(Cement Concrete Workers District Council)

CEMENT MASON

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Cement Mason (First Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$23.39
Supplemental Benefit Rate per Hour: \$14.86

Cement Mason (Second Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$28.29
Supplemental Benefit Rate per Hour: \$15.16

Cement Mason (Third Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$33.69
Supplemental Benefit Rate per Hour: \$15.27

(Local #780)

DERRICKPERSON & RIGGER (STONE)

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Derrickperson & Rigger (stone) - First Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour: 50% of Journeyperson's rate

Derrickperson & Rigger (stone) - Second Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 70% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

Derrickperson & Rigger (stone) - Second Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

Derrickperson & Rigger (stone) - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 90% of Journeyperson's rate

Supplemental Benefit Rate Per Hour: 75% of Journeyperson's rate

(Local #197)

DOCKBUILDER/PILE DRIVER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Dockbuilder/Pile Driver (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$26.98

Supplemental Benefit Rate Per Hour: \$37.89

Dockbuilder/Pile Driver (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$32.58

Supplemental Benefit Rate Per Hour: \$37.89

Dockbuilder/Pile Driver (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$40.96

Supplemental Benefit Rate Per Hour: \$37.89

Dockbuilder/Pile Driver (Fourth Year)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: \$49.35
Supplemental Benefit Rate Per Hour: \$37.89

(Carpenters District Council)

ELECTRICIAN

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Electrician (First Term: 0-6 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$18.00
Supplemental Benefit Rate per Hour: \$17.18
Overtime Supplemental Rate Per Hour: \$18.38

Electrician (First Term: 7-12 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$18.50
Supplemental Benefit Rate per Hour: \$17.44
Overtime Supplemental Rate Per Hour: \$18.67

Electrician (Second Term: 0-6 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$19.50
Supplemental Benefit Rate per Hour: \$17.97
Overtime Supplemental Rate Per Hour: \$19.26

Electrician (Second Term: 7-12 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$20.50
Supplemental Benefit Rate per Hour: \$18.49
Overtime Supplemental Rate Per Hour: \$19.85

Electrician (Third Term: 0-6 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$21.50

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$19.02**
Overtime Supplemental Rate Per Hour: **\$20.44**

Electrician (Third Term: 7-12 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$22.50**
Supplemental Benefit Rate per Hour: **\$19.54**
Overtime Supplemental Rate Per Hour: **\$21.03**

Electrician (Fourth Term: 0-6 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$23.50**
Supplemental Benefit Rate per Hour: **\$20.06**
Overtime Supplemental Rate Per Hour: **\$21.62**

Electrician (Fourth Term: 7-12 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$25.50**
Supplemental Benefit Rate per Hour: **\$21.11**
Overtime Supplemental Rate Per Hour: **\$22.80**

Electrician (Fifth Term: 0-12 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$27.50**
Supplemental Benefit Rate per Hour: **\$24.79**
Overtime Supplemental Rate Per Hour: **\$26.52**

Electrician (Fifth Term: 13-18 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$32.00**
Supplemental Benefit Rate per Hour: **\$27.20**
Overtime Supplemental Rate Per Hour: **\$29.23**

Overtime Description

Overtime Wage paid at time and one half the regular rate

(Local #3)

ELEVATOR CONSTRUCTOR

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Elevator (Constructor) - First Year

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$34.78

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$35.48

Elevator (Constructor) - Second Year

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$35.42

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$36.16

Elevator (Constructor) - Third Year

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Rate Per Hour: \$36.71

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Rate Per Hour: \$37.53

Elevator (Constructor) - Fourth Year

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Rate Per Hour: \$38.00

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Rate Per Hour: \$38.90

(Local #1)

ELEVATOR REPAIR & MAINTENANCE

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Elevator Service/Modernization Mechanic (First Year)

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Per Hour: \$34.75

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Per Hour: \$35.45

Elevator Service/Modernization Mechanic (Second Year)

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Benefit Per Hour: \$35.39

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Benefit Per Hour: \$36.13

Elevator Service/Modernization Mechanic (Third Year)

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Per Hour: \$36.68

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Per Hour: \$37.50

Elevator Service/Modernization Mechanic (Fourth Year)

Effective Period: 7/1/2024 - 3/16/2025
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Per Hour: \$37.96

Effective Period: 3/17/2025 - 6/30/2025
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Per Hour: \$38.86

(Local #1)

ENGINEER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

Engineer - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$27.47

Supplemental Benefit Rate per Hour: \$34.30

Engineer - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$34.34

Supplemental Benefit Rate per Hour: \$34.30

Engineer - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$37.77

Supplemental Benefit Rate per Hour: \$34.30

Engineer - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$41.21

Supplemental Benefit Rate per Hour: \$34.30

(Local #15)

ENGINEER - OPERATING

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

Operating Engineer - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 40% of Operating Engineer - Road & Heavy Construction V's Rate

Supplemental Benefit Per Hour: \$26.40

Operating Engineer - Second Year

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 50% of Operating Engineer - Road & Heavy Construction V's Rate
Supplemental Benefit Per Hour: \$26.40

Operating Engineer - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 60% of Operating Engineer - Road & Heavy Construction V's Rate
Supplemental Benefit Per Hour: \$26.40

(Local #14)

FLOOR COVERER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Floor Coverer (First Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$25.20
Supplemental Benefit Rate per Hour: \$17.25

Floor Coverer (Second Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$28.20
Supplemental Benefit Rate per Hour: \$18.75

Floor Coverer (Third Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$32.45
Supplemental Benefit Rate per Hour: \$22.35

Floor Coverer (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: \$40.33
Supplemental Benefit Rate per Hour: \$24.35

(Carpenters District Council)

GLAZIER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Glazier (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Glazier (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Glazier (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Glazier (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #1281)

HAZARDOUS MATERIAL HANDLER

(Ratio of Apprentice Journeyman: 1 to 1, 1 to 3)

Handler (First 1000 Hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$20.00

Supplemental Benefit Rate per Hour: \$15.10

Handler (Second 1000 Hours)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: \$21.00

Supplemental Benefit Rate per Hour: \$15.10

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Handler (Third 1000 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$24.00**
Supplemental Benefit Rate per Hour: **\$15.10**

Handler (Fourth 1000 Hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$26.00**
Supplemental Benefit Rate per Hour: **\$15.10**

(Local #78)

HEAT & FROST INSULATOR
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Heat & Frost Insulator (First Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Heat & Frost Insulator (Second Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Heat & Frost Insulator (Third Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Heat & Frost Insulator (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage and Supplemental Rate Per Hour: 70% of Journeyman's rate

(Local #12)

HOUSE WRECKER

(TOTAL DEMOLITION)

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

House Wrecker - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$21.55**

Supplemental Benefit Rate per Hour: **\$11.27**

House Wrecker - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.30**

Supplemental Benefit Rate per Hour: **\$11.27**

House Wrecker - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$24.80**

Supplemental Benefit Rate per Hour: **\$11.27**

House Wrecker - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$27.30**

Supplemental Benefit Rate per Hour: **\$11.27**

(Mason Tenders District Council)

IRON WORKER - ORNAMENTAL

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Iron Worker (Ornamental) - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.98**

Supplemental Benefit Rate per Hour: **\$16.00**

Iron Worker (Ornamental) - Second Year

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$28.45**
Supplemental Benefit Rate per Hour: **\$18.00**

Iron Worker (Ornamental) - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$30.80**
Supplemental Benefit Rate per Hour: **\$19.00**

Iron Worker (Ornamental) - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$34.39**
Supplemental Benefit Rate per Hour: **\$21.00**

(Local #580)

IRON WORKER - STRUCTURAL
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Iron Worker (Structural) - 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$30.23**
Supplemental Benefit Rate per Hour: **\$61.90**

Iron Worker (Structural) - 7- 18 Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$30.83**
Supplemental Benefit Rate per Hour: **\$61.90**

Iron Worker (Structural) - 19 - 36 months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$31.44**
Supplemental Benefit Rate per Hour: **\$61.90**

(Local #40 and #361)

LABORER - HEAVY & HIGHWAY

(Ratio Apprentice to Journeyman: 1 to 1, 1 to 3)

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - First 1000 hours

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 50% of Journeyman's rate

Supplemental Rate Per Hour: \$54.03

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Second 1000 hours

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 60% of Journeyman's rate

Supplemental Rate Per Hour: 54.03

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Third 1000 hours

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 75% of Journeyman's rate

Supplemental Rate Per Hour: 54.03

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Fourth 1000 hours

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 90% of Journeyman's rate

Supplemental Rate Per Hour: \$54.03

(Local #731)

LABORER - PAVER & ROADBUILDER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Paver and Roadbuilder - First Year (Minimum 1000 hours)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$31.36**
Supplemental Benefit Rate per Hour: **\$26.67**

Paver and Roadbuilder - Second Year (Minimum 1000 hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$33.00**
Supplemental Benefit Rate per Hour: **\$26.67**

(Local#1010)

**LABORER - PAVER AND ROADBUILDER - LINE
STRIPING (ROADWAY)**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Paver and Roadbuilder - Line Striping (Roadway) - First Year (Minimum 1000 hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$31.36**
Supplemental Benefit Rate per Hour: **\$19.27**

Paver and Roadbuilder - Line Striping (Roadway) - Second Year (Minimum 1000 hours)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$33.00**
Supplemental Benefit Rate per Hour: **\$19.27**

(Local #1010)

MARBLE MECHANICS

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Cutters & Setters - First 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 40% of Journeyperson's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Cutters & Setters - Second 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 45% of Journeyperson's rate

Cutters & Setters - Third 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 50% of Journeyperson's rate

Cutters & Setters - Fourth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 55% of Journeyperson's rate

Cutters & Setters - Fifth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

Cutters & Setters - Sixth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 65% of Journeyperson's rate

Cutters & Setters - Seventh 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 70% of Journeyperson's rate

Cutters & Setters - Eighth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Cutters & Setters - Ninth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 85% of Journeyperson's rate

Cutters & Setters - Tenth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage and Supplemental Rate Per Hour: 95% of Journeyperson's rate

Polishers & Finishers - First 900 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 70% of Journeyperson's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Polishers & Finishers - Second 900 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 80% of Journeyperson's rate

Polishers & Finishers - Third 900 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 90% of Journeyperson's rate

(Local #7)

MASON TENDER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Mason Tender - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$22.05**

Supplemental Benefit Rate per Hour: **\$10.77**

Mason Tender - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.80**

Supplemental Benefit Rate per Hour: **\$10.77**

Mason Tender - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.30**

Supplemental Benefit Rate per Hour: **\$10.77**

Mason Tender - Fourth Year

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$27.80**
Supplemental Benefit Rate per Hour: **\$10.77**

(Local #79)

MASON TENDER (INTERIOR DEMOLITION WORKER) (Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Mason Tender (Interior Demolition) - First Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$21.30**
Supplemental Benefit Rate per Hour: **\$10.97**

Mason Tender (Interior Demolition) - Second Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$23.05**
Supplemental Benefit Rate per Hour: **\$10.97**

Mason Tender (Interior Demolition) - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$24.55**
Supplemental Benefit Rate per Hour: **\$10.97**

Mason Tender (Interior Demolition) - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$27.05**
Supplemental Benefit Rate per Hour: **\$10.97**

(Local #79)

METALLIC LATHER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Metallic Lather (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$22.55**

Supplemental Benefit Rate per Hour: **\$17.87**

Metallic Lather (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.60**

Supplemental Benefit Rate per Hour: **\$16.87**

Metallic Lather (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$24.60**

Supplemental Benefit Rate per Hour: **\$15.92**

Metallic Lather (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$25.65**

Supplemental Benefit Rate per Hour: **\$14.92**

(Local #46)

MILLWRIGHT

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Millwright (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$32.16**

Supplemental Benefit Rate per Hour: **\$37.78**

Millwright (Second Year)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$37.61**
Supplemental Benefit Rate per Hour: **\$41.48**

Millwright (Third Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$43.06**
Supplemental Benefit Rate per Hour: **\$45.83**

Millwright (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$53.96**
Supplemental Benefit Rate per Hour: **\$52.59**

(Local #740)

PAINTER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Painter - Brush & Roller - First Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$17.60**
Supplemental Benefit Rate per Hour: **\$19.09**

Painter - Brush & Roller - Second Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$22.00**
Supplemental Benefit Rate per Hour: **\$24.46**

Painter - Brush & Roller - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$26.40**
Supplemental Benefit Rate per Hour: **\$28.80**

Painter - Brush & Roller - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$35.20**

Supplemental Benefit Rate per Hour: **\$37.24**

(District Council of Painters)

PAINTER - BRIDGE & STRUCTURAL STEEL

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Painter - Bridge & Structural Steel (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Painter - Bridge & Structural Steel (Second Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Painter - Bridge & Structural Steel (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #806)

PAINTER - METAL POLISHER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Metal Polisher (First Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$19.67**

Supplemental Benefit Rate per Hour: **\$8.66**

New Construction - Wage Rate Per Hour: **\$20.06**

Scaffold Over 34 Feet - Wage Rate Per Hour: **\$22.17**

Metal Polisher (Second Year)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$21.63**

Supplemental Benefit Rate per Hour: **\$8.66**

New Construction - Wage Rate Per Hour: **\$22.07**

Scaffold Over 34 Feet - Wage Rate Per Hour: **\$24.13**

Metal Polisher (Third Year)

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.60**

Supplemental Benefit Rate per Hour: **\$8.66**

New Construction - Wage Rate Per Hour: **\$24.14**

Scaffold Over 34 Feet - Wage Rate Per Hour: **\$26.10**

(Local 8A-28)

PLASTERER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

(Each Term is 800 Hours.)

Plasterer - First Term

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 55% of Journeyman's rate

Supplemental Rate Per Hour: **\$17.48**

Plasterer - Second Term

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 60% of Journeyman's rate

Supplemental Rate Per Hour: **\$18.63**

Plasterer - Third Term

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 70% of Journeyman's rate

Supplemental Rate Per Hour: **\$20.93**

Plasterer - Fourth Term

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 75% of Journeyman's rate

Supplemental Rate Per Hour: **\$22.10**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

(Local #262)

PLASTERER - TENDER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Plasterer Tender - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$21.55**

Supplemental Benefit Rate per Hour: **\$11.27**

Plasterer Tender - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$23.30**

Supplemental Benefit Rate per Hour: **\$11.27**

Plasterer Tender - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$24.80**

Supplemental Benefit Rate per Hour: **\$11.27**

Plasterer Tender - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$27.30**

Supplemental Benefit Rate per Hour: **\$11.27**

(Local #79)

PLUMBER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Plumber - First Year: 1st Six Months

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$19.00**

Supplemental Benefit Rate per Hour: **\$5.43**

Plumber - First Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$21.00**

Supplemental Benefit Rate per Hour: **\$6.43**

Plumber - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$30.22**

Supplemental Benefit Rate per Hour: **\$22.73**

Plumber - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$32.32**

Supplemental Benefit Rate per Hour: **\$22.73**

Plumber - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$35.17**

Supplemental Benefit Rate per Hour: **\$22.73**

Plumber - Fifth Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$36.57**

Supplemental Benefit Rate per Hour: **\$22.73**

Plumber - Fifth Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$48.64**

Supplemental Benefit Rate per Hour: **\$22.73**

(Plumbers Local #1)

POINTER, WATERPROOFER, CAULKER, SANDBLASTER, STEAMBLASTER

(Exterior Building Renovation)

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$32.76**

Supplemental Benefit Rate per Hour: **\$15.10**

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$37.09**

Supplemental Benefit Rate per Hour: **\$20.30**

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$42.97**

Supplemental Benefit Rate per Hour: **\$24.05**

Pointer, Waterproofer, Caulker, Sandblaster, Steamblaster - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$51.60**

Supplemental Benefit Rate per Hour: **\$25.05**

(Bricklayer District Council)

ROOFER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Roofer - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: 38% of Journeyman's rate

Supplemental Benefit Rate Per Hour: **\$7.67**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Roofer - Second Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$17.69

Roofer - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$19.61

Roofer - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$23.45

Roofer - Fifth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$29.22

(Local #8)

SHEET METAL WORKER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Sheet Metal Worker (0-6 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 25% of Journeyperson's rate
Supplemental Rate Per Hour: \$7.64

Sheet Metal Worker (7-18 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 35% of Journeyperson's rate
Supplemental Rate Per Hour: \$21.49

Sheet Metal Worker (19-30 Months)

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Rate Per Hour: \$29.09

Sheet Metal Worker (31-36 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$34.41

Sheet Metal Worker (37-42 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$34.41

Sheet Metal Worker (43-48 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$42.42

Sheet Metal Worker (49-54 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$42.42

Sheet Metal Worker (55-60 Months)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$47.76

(Local #28)

SIGN ERECTOR

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Sign Erector - First Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 35% of Journeyperson's rate
Supplemental Rate Per Hour: \$17.84

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Sign Erector - First Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 40% of Journeyperson's rate
Supplemental Rate Per Hour: \$20.25

Sign Erector - Second Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Rate Per Hour: \$22.66

Sign Erector - Second Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$25.09

Sign Erector - Third Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$33.83

Sign Erector - Third Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$36.81

Sign Erector - Fourth Year: 1st Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$40.63

Sign Erector - Fourth Year: 2nd Six Months

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$43.70

Sign Erector - Fifth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$46.76

Sign Erector - Sixth Year

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$49.80

(Local #137)

STEAMFITTER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Steamfitter - First Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate and Supplemental Per Hour: 40% of Journeyperson's rate

Steamfitter - Second Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate and Supplemental Rate Per Hour: 50% of Journeyperson's rate.

Steamfitter - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate and Supplemental Rate per Hour: 60% of Journeyperson's rate.

Steamfitter - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate and Supplemental Rate Per Hour: 70% of Journeyperson's rate.

Steamfitter - Fifth Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate and Supplemental Rate Per Hour: 80% of Journeyperson's rate.

(Local #638)

STEAMFITTER - REFRIGERATION & AIR CONDITIONER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Refrigeration & Air Conditioner (First Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$22.31**
Supplemental Benefit Rate per Hour: **\$14.47**

Refrigeration & Air Conditioner (Second Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$26.94**
Supplemental Benefit Rate per Hour: **\$15.91**

Refrigeration & Air Conditioner (Third Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$31.38**
Supplemental Benefit Rate per Hour: **\$17.41**

Refrigeration & Air Conditioner (Fourth Year)

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$37.90**
Supplemental Benefit Rate per Hour: **\$19.44**

(Local #638-B)

STONE MASON - SETTER

(Ratio Apprentice of Journeyman: 1 to 1, 1 to 2)

Stone Mason - Setters - First 750 Hours

Effective Period: 7/1/2024 - 6/30/2025
Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Stone Mason - Setters - Second 750 Hours

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: 50% of Journeyman's rate

Stone Mason - Setters - Third 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fourth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fifth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Sixth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate Per Hour: 100% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

(Bricklayers District Council)

TAPER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Drywall Taper - First Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$21.75**
Supplemental Benefit Rate per Hour: **\$15.00**

Drywall Taper - Second Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$24.24**
Supplemental Benefit Rate per Hour: **\$24.71**

Drywall Taper - Third Year

Effective Period: 7/1/2024 - 6/30/2025
Wage Rate per Hour: **\$29.08**
Supplemental Benefit Rate per Hour: **\$26.67**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Drywall Taper - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate per Hour: **\$38.78**

Supplemental Benefit Rate per Hour: **\$30.59**

(Local #1974)

TILE LAYER - SETTER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Tile Layer - Setter - First 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 35% of Journeyman's rate

Tile Layer - Setter - Second 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour 40% of Journeyman's rate

Tile Layer - Setter - Third 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Tile Layer - Setter - Fourth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

Tile Layer - Setter - Fifth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Tile Layer - Setter - Sixth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

Tile Layer - Setter - Seventh 750 Hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 70% of Journeyperson's rate

Tile Layer - Setter - Eighth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Tile Layer - Setter - Ninth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 80% of Journeyperson's rate

Tile Layer - Setter - Tenth 750 Hours

Effective Period: 7/1/2024 - 6/30/2025

Wage and Supplemental Rate Per Hour: 90% of Journeyperson's rate

(Local #7)

TIMBERPERSON

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Timberperson - First Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$24.96

Supplemental Rate Per Hour: \$37.69

Timberperson - Second Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$30.07

Supplemental Rate Per Hour: \$37.69

Timberperson - Third Year

Effective Period: 7/1/2024 - 6/30/2025

Wage Rate Per Hour: \$37.72

Supplemental Rate Per Hour: \$37.69

Timberperson - Fourth Year

Effective Period: 7/1/2024 - 6/30/2025

**OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
CONSTRUCTION APPRENTICE PREVAILING WAGE SCHEDULE**

Wage Rate Per Hour: \$45.38

Supplemental Rate Per Hour: \$37.69

(Local #1536)



Leonard A. Mancusi
SENIOR ASSISTANT COMPTROLLER

THE CITY OF NEW YORK
OFFICE OF THE COMPTROLLER
1 CENTRE STREET ROOM 1120
NEW YORK, N.Y. 10007-2341

TELEPHONE: (212) 669-3622
FAX NUMBER: (212) 669-8499

ALAN G. HEVESI
COMPTROLLER

MEMORANDUM

November 6, 2000

To Agency Chief Contracting Officers

From: Leonard A. Mancusi

Re: Security at Construction Sites

Prior to the enactment of Administrative Code §6-109, security guards on construction sites were not subject to prevailing wages. Security guards under the New York State labor law are covered under §230 which provides that prevailing wages are to be paid for security guards in existing buildings. §6-109 of the Administrative Code which was enacted in 1996 closed this loophole by including all security guards working pursuant to a city contract as a prevailing wage trade.

Although some construction contract boilerplate language has been amended to include §6-109, sub-contractors performing security services have advised us that they were not aware of this provision and, since traditionally, security guards were not a covered trade on construction sites, and they were not advised by a prime contractor that they would have to pay prevailing wages, they have not been doing so.

To avoid the possibility of issuing stop payments against prime contractors for the failure of their security service sub-contractors to pay

prevailing wages, we suggest that you write to all your existing security guard sub-contractors and their primes and in the future, upon approval of a security guard sub-contractor, advise the contractors of their obligation to pay prevailing wages under §6-109 of the Administrative Code.

As always, your cooperation is appreciated.

LAM:er
ACCO.SECURITY AT SITES



**Department of
Design and
Construction**

Issue Date: July 1, 2022

**DDC STANDARD GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS**



**Department of
Design and
Construction**

Issue Date: July 1, 2022

(No Text on This Page)

Changes between the 1/1/2022 and 7/1/2022 Single Contract General Conditions

***NOTE:** The list below is intended as a guide and does not include minor editing.
The text of the General Conditions and the Addendum to the General Conditions govern.*

Section No. Change

01 10 00	1.10D: Update Mobilization Payment Add 1.13: Payments to M/WBE Subcontractors
01 22 00	New Section Added
01 40 00	1.7: update minimum and special experience qualifications
01 50 00	3.8B.3: Update DDC Field Office Trailer requirements 3.8D.3: Update Equipment for the DDC Field Office requirements
01 73 00	Add 3.25 Correction of the Work
01 77 00	Remove 3.2 Repair of the Work (moved into 017300, 3.25)



**Department of
Design and
Construction**

Issue Date: July 1, 2022

(No Text on This Page)



**DIVISION 01 – DDC STANDARD GENERAL CONDITIONS – SINGLE CONTRACT PROJECTS
TABLE OF CONTENTS**

SECTION NO.	SECTION TITLE
01 10 00	SUMMARY
01 22 00	EXPANDED WORK ALLOWANCE
01 31 00	PROJECT MANAGEMENT AND COORDINATION
01 32 00	CONSTRUCTION PROGRESS DOCUMENTATION
01 32 16.10	PROJECT SCHEDULES (METHOD A)
01 32 16.20	PROJECT SCHEDULES (METHOD B)
01 32 16.30	PROJECT SCHEDULES (METHOD C)
01 32 33	PHOTOGRAPHIC DOCUMENTATION
01 33 00	SUBMITTAL PROCEDURES
01 35 03	GENERAL MECHANICAL REQUIREMENTS
01 35 06	GENERAL ELECTRICAL REQUIREMENTS
01 35 26	SAFETY REQUIREMENTS PROCEDURES
01 35 91	HISTORIC TREATMENT PROCEDURES
01 40 00	QUALITY REQUIREMENTS
01 42 00	REFERENCES
01 50 00	TEMPORARY FACILITIES, SERVICES AND CONTROLS
01 54 11	TEMPORARY ELEVATORS AND HOISTS
01 54 23	TEMPORARY SCAFFOLDING AND PLATFORMS
01 60 00	PRODUCT REQUIREMENTS
01 73 00	EXECUTION
01 74 19	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
01 77 00	CLOSEOUT PROCEDURES
01 78 39	CONTRACT RECORD DOCUMENTS
01 79 00	DEMONSTRATION AND OWNERS PRE-ACCEPTANCE ORIENTATION
01 81 13.03	SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS
01 81 13.04	SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS
01 81 13.10	ENVIRONMENTALLY PREFERABLE PURCHASING (EPP) COMPLIANCE
01 81 13.13	VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED V3 BUILDINGS
01 81 19	INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
01 91 13	GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS
01 91 15	GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 10 00
SUMMARY**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Addendum to the General Conditions: These General Conditions include and are supplemented by the Addendum to the General Conditions (the "Addendum"). The Addendum includes the following: (1) schedules referred to in these General Conditions, (2) information regarding the applicability of various articles, and (3) amended articles, if any.

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Scope and Intent
 - 2. Provisions Referenced in the Contract
 - 3. Performance of Work During Non-Regular Work Hours (Pursuant to a Change Order)
 - 4. Interruption of Services at Existing Facilities

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" means the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SCOPE AND INTENT:

- A. Description of Project: Refer to the Addendum for a description of the Project.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 B

- B. LEED: The City of New York will seek U.S. Green Building Council (USGBC) LEED (Leadership in Energy and Environmental Design) certification for this Project as specified in Section 01 81 13.03 "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS"; or Section 01 81 13.04 "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS", and the Addendum to the General Conditions.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 C

- C. COMMISSIONING: The Project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning must be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS, and/ or Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE and the Addendum to the General Conditions. The Contractor must cooperate with the commissioning agent and provide whatever assistance is required.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 D

- D. PROGRESS SCHEDULE: Refer to Section 01 32 16.1 PROGRESS SCHEDULES (METHOD A) or 01 32 16.2 PROGRESS SCHEDULES (METHOD B) or 01 32 16.3 PROGRESS SCHEDULES (METHOD C) and the Addendum to the General Conditions for requirements of the Project.
- E. COMPLETION OF WORK: Work to be done under the Contract is comprised of the furnishing of all labor, materials, equipment and other appurtenances, and obtaining all regulatory agency approvals necessary and required to complete the construction work in accordance with the Contract.
- F. OMISSION OF DETAILS: All work called for in the Specifications applicable to the Contract but not shown on the Contract Drawings in their present form, or vice versa, is required, and must be performed by the Contractor as though it were originally delineated or described. The cost of such work will be deemed included in the total Contract Price.
- G. WORK NOT IN SPECIFICATIONS OR CONTRACT DRAWINGS: Work not particularly specified in the Specifications nor detailed on the Contract Drawings but involved in carrying out their intent or in the complete and proper execution of the Work, is required, and must be performed by the Contractor. The cost of such work will be deemed included in the total Contract Price.
- H. SILENCE OF THE SPECIFICATIONS: The apparent silence of the Specifications as to any detail, or the apparent omission from them of a detailed description concerning any work to be done and materials to be furnished, will be regarded as meaning that only the best practice is to prevail and that only the best material and workmanship is to be used and interpretation of the Specifications will be made upon that basis.
- I. CONFLICT BETWEEN CONTRACT DRAWINGS AND SPECIFICATIONS: Should any conflict occur in or between the Drawings and Specifications, the Contractor will be deemed to have estimated the most expensive way of doing the Work unless the Contractor asked for and obtained a decision in writing from the Commissioner before the submission of the bid as to what must govern.

1.5 CONTRACT DRAWINGS AND SPECIFICATIONS:

- A. SCHEDULE C - The Contract Drawings are listed in Schedule C, which is set forth in the Addendum. Such drawings referred to in the Contract, and in the applicable Specifications for the Contract, bear the general title:

City of New York
Department of Design and Construction
Division of Public Buildings
- B. DOCUMENTS FURNISHED TO THE CONTRACTOR - After the award of the Contract, the Contractor will be furnished with five (5) complete sets of paper prints of all Contract Drawings mentioned in Paragraph A above, as well as a copy of the Specifications.
- C. ADDITIONAL COPIES of Drawings and Specifications, when requested, will be furnished to the Contractor if available.



- D. SUPPLEMENTARY DRAWINGS - When, in the opinion of the Commissioner, it becomes necessary to more fully explain the work to be done, or to illustrate the work further, or to show any changes which may be required, drawings known as Supplementary Drawings will be prepared by the Commissioner.
- E. COMPENSATION - Where Supplementary Drawings entail extra work, compensation therefore to the Contractor will be subject to the terms of the Contract. The Supplementary Drawings will be binding upon the Contractor with the same force as the Contract Drawings.
- F. SUPPLEMENTARY DRAWING PRINTS - Three (3) copies of prints of these Supplementary Drawings will be furnished to the Contractor.
- G. COPIES TO SUBCONTRACTORS - The Contractor must furnish each of its subcontractors and material suppliers such copies of Contract Drawings, Supplementary Drawings, or copies of the Specifications as may be required for its work.

1.6 COORDINATION:

- A. COORDINATION AND COOPERATION - The Contractor must consult and study the requirements of the Contract Drawings and Specifications for all required work, including all work to be performed by trade subcontractors, so that the Contractor may become acquainted with the work of the Project as a whole in order to achieve the proper coordination and cooperation necessary for the efficient and timely performance of the work.
- B. CONTRACTOR TO CHECK DRAWINGS: - The Contractor must verify all dimensions, quantities and details shown on the Contract Drawings, Schedules, or other data received from the Commissioner, and must notify the Commissioner of all errors, omissions, conflicts and discrepancies found therein. Notice of such errors will be given before the Contractor proceeds with any work. Figures must be used in preference to scale dimensions and large-scale drawings in preference to small-scale drawings.

1.7 SHOP DRAWINGS AND RECORD DRAWINGS:

- A. Refer to Section 01 33 00 SUBMITTAL PROCEDURES and Section 01 78 39 CONTRACT RECORD DOCUMENTS for requirements applicable to shop drawings and record drawings.

1.8 TEMPORARY FACILITIES, SERVICES AND CONTROLS:

- A. Refer to Section 01 50 00 TEMPORARY FACILITIES SERVICES AND CONTROLS for the responsibilities of the Contractor.

1.9 DUST CONTROL:

- A. The Contractor must prepare, execute and manage a "Dust Control Plan" for the prevention of the emission of dust from construction related activities in compliance with 15 RCNY 13-01 et. seq.

1.10 PROVISIONS REFERENCED IN THE CONTRACT:

- A. SCHEDULE A - Various Articles of the Contract refer to requirements set forth in Schedule A of the General Conditions. Schedule A, which is included in the Addendum, sets forth (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the Contract.
- B. EXTENSION OF TIME - Applications for Extensions of Time, as indicated in Article 13 of the Contract, must be made in accordance with the Rules of the Procurement Policy Board.



- C. PARTIAL PAYMENTS FOR MATERIALS IN ADVANCE OF THEIR INCORPORATION IN THE WORK PURSUANT TO ARTICLE 42 OF THE CONTRACT – In order to better ensure the availability of materials, fixtures and equipment when needed for the work, the Commissioner may authorize partial payment for certain materials, fixtures and equipment, prior to their incorporation in the work, but only in strict accordance with, and subject to, all the terms and conditions set forth in the Specifications, unless an alternate method of payment is elsewhere provided in the Specifications for specified materials, fixtures or equipment.
1. The Contractor must submit to the Commissioner a written request, in quadruplicate, for payment for materials purchased or to be purchased for which the Contractor needs to be paid prior to their actual incorporation in the work. The request must be accompanied by a schedule of the types and quantities of materials, and must state whether such materials are to be stored on or off the site.
 2. Where the materials are to be stored off the site, they must be stored at a place other than the Contractor's premises (except with the written consent of the Commissioner) and under the conditions prescribed or approved by the Commissioner. The Contractor must set apart and separately store at the place or places of storage all materials and must clearly mark same "PROPERTY OF THE CITY OF NEW YORK", and further, must not at any time move any of said materials to another off-site place of storage without the prior written consent of the Commissioner. Materials may be removed from their place of storage off the site for incorporation in the work upon approval of the Resident Engineer.
 3. Where the materials are to be stored at the site, they must be stored at such locations as will be designated by the Resident Engineer and only in such quantities as, in the opinion of the Resident Engineer, will not interfere with the proper performance of the Work by the Contractor or by other Contractors then engaged in performing work on the site. Such materials must not be removed from their place of storage on the site except for incorporation in the Work, without the approval of the Resident Engineer.
 4. INSURANCE
 - a. STORAGE OFF-SITE – Where the materials are stored off the site and until such time as they are incorporated in the Work, the Contractor must fully insure such materials against any and all risks of destruction, damage or loss including but not limited to fire, theft, and any other casualty or happening. The policy of insurance must be payable to the City of New York. It must be in such terms and amounts as must be approved by the Commissioner and must be placed with a company duly licensed to do business in the State of New York. The Contractor must deliver the original and one (1) copy of such policy or policies marked "Fully Paid" to the Commissioner.
 - b. STORAGE ON THE SITE – Where the materials are stored at the site, the Contractor must furnish satisfactory evidence to the Commissioner that they are properly insured against loss, by endorsements or otherwise, under the policy or policies of insurance obtained by the Contractor to cover losses to materials owned or installed by the Contractor. The policy of insurance must cover fire and extended coverage against windstorm, hail, explosion and riot attending a strike, civil commotion, aircraft, vehicles and smoke.
 5. All costs, charges and expenses arising out of the storage of such materials, must be paid by the Contractor and the City hereby reserves the right to retain out of any partial or final payment made under the Contract an amount sufficient to cover such costs, charges and expenses with the understanding that the City will have and may exercise any and all other remedies at law for the recovery of such cost, charges and expenses. There will be no increase in the Contract price for such costs, charges and expenses and the Contractor must not make any claim or demand for compensation therefore.



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

6. The Contractor must pay any and all costs of handling and delivery of materials, to the place of storage and from the place of storage to the site of the Work; and the City will have the right to retain from any partial or final payment an amount sufficient to cover the cost of such handling and delivery.
7. In the event that the whole or any part of these materials are lost, damaged, or destroyed in advance of their satisfactory incorporation in the work, the Contractor, at the Contractor's own cost, must replace such lost, damaged or destroyed materials of the same character and quality. The City will reimburse the Contractor for the cost of the replaced materials to the extent, and only to the extent, of the funds actually received by the City under the policies of insurance hereinbefore referred to. Until such time as the materials are replaced, the City will deduct from the value of the stored materials or from any other money due under the Contract, the amount paid to the Contractor for such lost, damaged or destroyed materials.
8. Should any of the materials paid for the City hereunder be subsequently rejected or incorporated in the work in a manner or by a method not in accordance with the Contract Documents, the Contractor must remove and replace, at Contractor's own cost, such defective or improperly incorporated material with materials complying with the Contract Documents. Until such materials are replaced, the City will deduct from the value of the stored materials or from any other money due the Contractor, the amount paid by the City for such rejected or improperly incorporated materials.
9. Payments for the cost of materials made hereunder will not be deemed to be an acceptance of such materials as being in accordance with the Contract Documents, and the Contractor always retains and must comply with the Contractor's duty to deliver to the site and properly incorporate in the work only materials which comply with the Contract Documents.
10. The Contractor must retain any and all risks in connection with the damage, destruction, or loss of the materials paid for hereunder to the time of delivery of the same to the site of the Work and their proper incorporation in the work in accordance with the Contract Documents.
11. The Contractor must comply with all laws and the regulations of any governmental body or agency pertaining to the priority purchase, allocation, and use of the materials.
12. When requesting payment for such materials, the Contractor must submit with the partial estimate duly authenticated documents of title, such as bills of sale, invoices or warehouse receipts, all in quadruplicate. The executed bills of sale must transfer title to the materials from the Contractor to the City. (In the event that the invoices state that the material has been purchased by a subcontractor, bills of sale in quadruplicate will also be required transferring title to the materials from subcontractor to the Contractor).
13. Where the Contractor, with the approval of the Commissioner, has purchased unusually large quantities of materials in order to assure their availability for the work, the Commissioner, at the Commissioner's option, may waive the requirements of Paragraph 12 provided the Contractor furnishes evidence in the form of an affidavit from the Contractor in quadruplicate, and such other proof as the Commissioner may require, that the Contractor is the sole owner of such materials and has purchased them free and clear of all liens and other encumbrances. In such event, the Contractor will pay for such materials and submit proof thereof, in the same manner as provided in Paragraph 12 hereof, within seven (7) days after receipt of payment therefore from the Comptroller. Failure on the part of the Contractor to submit satisfactory evidence that all such materials have been paid for in full, will preclude the Contractor from payments under the Contract.
14. The Contractor must include in each succeeding partial estimate requisition a summary of materials stored which must set forth the quantity and value of materials in storage, on or off the site, at the end of each preceding estimate period; the amount removed for incorporation in the



Work; the quantity and value of materials delivered during the current period and the total value of materials on hand for which payment thereof will be included in the current payment estimate.

15. Upon proof to the satisfaction of the Commissioner of the actual cost of such materials and upon submission of proper proof of title as required under Paragraph 12 or Paragraph 13 hereof, payment will be made therefore to the extent of 85%, provided however, that the cost so verified, established and approved must not exceed the estimated cost of such materials included in the approved detailed breakdown estimate submitted in accordance with Article 41 of the Contract; if it does, the City will pay only 85% approved estimated cost.
 16. Upon the incorporation in the Work of any such materials, which have been paid for in advance of such incorporation in accordance with the foregoing provisions, payment will be made for such materials incorporated in the Work pursuant to Article 42 of the Contract, less any sums paid pursuant to Paragraph 15 herein.
- D. MOBILIZATION PAYMENT – A line item for mobilization must be allowed on the Contractor’s Detailed Bid Breakdown submitted in accordance with Article 41 of the Contract. The Mobilization Payment is intended to include the cost of required bonds, insurance coverage, and/or any other expenses required for the initiation of the Contract Work. All costs for mobilization will be deemed included in the total Contract Price. The Detailed Bid Breakdown must reflect, and the Mobilization Payment will be made, in accordance with the following schedule:

Contract Amount	Mobilization Amount
\$0 - \$10,000,000	8% of contract amount
\$10,000,001 - \$50,000,000	8% on the first \$10,000,000 plus 4% of contract amount greater than \$10,000,000
Over \$50,000,000	\$2,400,000

The Contractor may requisition for the Mobilization Payment upon satisfactory completion of the following:

1. DDC approval of the Detailed Bid Breakdown per Article 41 of the Contract;
 2. Selection and DDC approval of any required field office location(s);
 3. Submission of all required insurance certificates and bond;
 4. Approval of the Site Safety Plan per the Safety Requirements Section of the Information for Bidders;
 5. Approval of the Progress Schedule;
 6. Approval of the Schedule Submittal; and,
 7. Submission of the Pre-Construction Photographs.
- E. ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING: The Contractor must submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel in Non-Road Vehicles, and the implementation of Best Available Technology (BAT), as set forth in Article 5.4 of the Contract. Such reports must be submitted in accordance with the schedule, format, directions, and procedures established by the Commissioner.



1.11 PERFORMANCE OF WORK DURING NON-REGULAR WORK HOURS:

- A. **NON-REGULAR WORK HOURS:** The Commissioner may issue a change order in accordance with Article 25 of the Contract which, (1) directs the Contractor to perform the Work, or specific components thereof, during other than regular work hours (i.e., evenings, weekends and holidays), and (2) provides compensation to the Contractor for costs in connection with the performance of Work during other than regular work hours. The Commissioner may issue a change order if a delay has occurred and such delay is not the fault of the Contractor, or if the Work is of such an important nature that delay in completing such work would result in serious disadvantage to the public.
- B. **PROCEDURE:** The Contractor must: (1) obtain whatever permits may be required for performance of the Work during other than regular business hours, and (2) pay all necessary fees in connection with such permits. In addition, if directed by the Commissioner, the Contractor must make immediate application to the Commissioner of the Department of Labor, State of New York, for dispensation in accordance with Subdivision 2 of Section 220 of the Labor Law.

1.12 INTERRUPTION OF SERVICES AT EXISTING FACILITIES:

- A. **EVENING AND WEEKEND WORK -** Where performance of the Work requires the temporary shutdown(s) of services, such shutdown(s) must be made at night or on weekends or at such times that will cause no interference with the established routines and operations of the facility in question.
 - 1 Where weekend or evening work is required due to unavoidable service shutdowns, such work will be performed at no extra cost to the City. Components of the Work that must be performed during other than regular work hours are indicated in the Drawings and/or the Specifications.
- B. **INTERRUPTION OF EXISTING FACILITIES:**
 - 1 The Contractor must not interrupt any of the services of the facility nor interfere with such services in any way without the permission of the Commissioner. Such interruption or interferences must be made as brief as possible, and only at such time stated.
 - 2 Under no circumstances will the Contractor, its subcontractors, or its workers, be permitted to use any part of the project as a shop, without the permission of the Commissioner.
 - 3 Unnecessary noise must be avoided at all times and necessary noise must be reduced to a minimum.
 - 4 Toilet facilities, water, and electricity must be operational at all times (i.e. 24/7). No services of the facility can be interrupted in any way without the permission of the Commissioner. Careful coordination of all Work with the Resident Engineer must be done to maintain the operational level of the Project personnel at the facility.
 - 5 The Contractor must schedule the Work to avoid noise interference that will affect the normal functions of the facility. In particular, construction operations producing noises that are objectionable to the functions of the facility must be scheduled at times of day or night, day of the week, or weekend, which will not interfere with personnel at the facility. Any additional cost resulting from this scheduling will be borne by the Contractor.
 - 6 The Contractor must arrange to work continuously, including evening and weekend hours, if required, to assure that services will be shut down only during the time actually required to make the necessary connections to the existing facility.
 - 7 The Contractor must give ample written notice in advance to the Commissioner and personnel at the facility of any required shutdown.



1.13 PAYMENTS TO M/WBE SUBCONTRACTORS:

- A. The Department of Design and Construction (“DDC”) is committed to supporting the growth and success of Minority and Women-owned Business Enterprises (“M/WBE”). In furtherance of this goal, DDC complies with Local Law 1 / NYC Administrative Code section 6-129, as amended. In order to support the growth and success of M/WBEs on all DDC projects, it is important that M/WBE vendors that are sub-contractors (any tiers) are treated fairly at all times and that their payment requisitions / invoices are handled in accordance with the City’s Standard Construction Contract. Pursuant to the Standard Construction Contract, prime contractors are required to pay subcontractors within thirty (30) days of receipt of such funds from DDC. Failure to comply with the Standard Construction Contract and the goals established by DDC as it applies to M/WBEs, may result in financial sanctions and negative performance evaluations, which will be taken into consideration on future procurements.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 10 00



SECTION 01 22 00

EXPANDED WORK ALLOWANCE

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 22 00

PART I - GENERAL

1.1 PURPOSE

- A. An Allowance has been established for the items set forth in sub-section 1.3 below (“Expanded Work Allowance” or “EWA”). Payment for the items set forth in sub-section 1.3 (“Expanded Work Items”) may be made through the EWA, as directed by the Commissioner. “Extra Work”, “overrun”, and “Allowance” are defined by the Standard Construction Contract (see Articles 2.1.16, 26.1, and 2.1.4, respectively) and nothing in this Section alters, or will be deemed to alter the interpretation or application of, the Standard Construction Contract, including but not limited to Articles 25, 26, 28, and 78 of the Standard Construction Contract.

1.2 PROCESS

- A. If the Commissioner determines that use of the EWA is appropriate, in their sole discretion, the Commissioner will prepare a written scope document for the Expanded Work Items for the Contractor’s execution (“EWA Scope Memo”). The EWA Scope Memo will set forth the maximum amount payable from the EWA prior to the execution of a final cost memorandum (“Maximum Amount”), in accordance with this Section. The Maximum Amount may be increased from time to time by the Commissioner, in their sole discretion, except that the Maximum Amount may not exceed 80% of the Commissioner’s estimated total cost for such Work (the “Estimated Cost”) unless and until a final cost is determined and a final cost memorandum (“Final Cost Memo”) executed in accordance with this Section.
- B. Neither the Maximum Amount nor the Estimated Cost will be deemed to be the final cost of the Expanded Work Items. The final cost for the Expanded Work Items will be determined in accordance with Article 26 of the Standard Construction Contract. The Contractor must submit its detailed price proposal for the Expanded Work Items, calculated in accordance with the Contract, within the time period set forth in the EWA Scope Memo or within 90 Days after the executed EWA Scope Memo is issued to the Contractor, whichever is sooner.
- C. Once the EWA Scope Memo is executed and the Contractor is directed to proceed with the Work, DDC will make progress payments, as provided in the Contract, up to the Maximum Amount or until the submission period has expired, whichever occurs sooner.
- D. DDC will not make any progress payments for the performance of the Expanded Work Items beyond the submission period set forth in sub-Section C, above, unless and until a final cost has been determined and a Final Cost Memo executed in accordance with this Section. No amounts above the Maximum Amount set by the Commissioner will be payable from the EWA, unless and until a final cost has been determined and a Final Cost Memo executed in accordance with this Section. In all events, the Contractor shall promptly and diligently comply with the Commissioner’s direction and perform all Work required by the Contract and the EWA Scope Memo.
- E. Upon receipt of the Contractor’s cost detailed proposal, DDC will evaluate the proposal and initiate negotiations, as necessary, to determine the final cost of the Expanded Work Items in accordance with Article 26 of the Standard Construction Contract. The Contractor is responsible to furnish time and material records



in accordance with Article 28 of the Standard Construction Contract until a Final Cost Memo is executed. If the parties cannot agree on a unit price or fixed price, the Contractor will be paid on the basis of time and material records in accordance with Article 26 the Standard Construction Contract.

- F. A Final Cost Memo will be prepared by the Commissioner to be executed by the parties. The total net sum of the amounts added and/or credited under the EWA Scope Memo and payment of the finalized Final Cost Memo constitutes full accord and satisfaction for the costs resulting from the Expanded Work Items. In the event the EWA is insufficient to pay the full amount of the Final Cost Memo, the parties agree to execute change order documents for the remaining funds, subject to registration in accordance with the New York City Charter.

1.3 PRICE TO COVER

- A. Expanded Work Items are those items set forth below. The EWA may be used, in the Commissioner's discretion, for the following Expanded Work Items:
 - 1. Non-material changes in the Work necessary to complete Contract Work due to site conditions that differ from those included in the Contract Documents and that could not have been anticipated by the Contractor.
 - 2. Non-material changes in the Work directed by the Commissioner that result in a net change in the cost to the Contractor for the Work to be performed under this Contract, including but not limited to the following:
 - a. Overruns of unit price items and quantity increases in portions of work within a lump sum item.
 - b. NYCDOT traffic stipulations or permit requirements that significantly differ from those included in the Contract Documents and that could not have been anticipated by the Contractor.
 - c. Changes to the sizes of materials or changes to specifications of materials.
 - d. Materials/structures not included in the Contract Documents that are necessary to complete Contract Work and that could not have been anticipated by the Contractor.

1.4 BASIS OF PAYMENT

- A. The fixed sum must be considered the price bid for this item. The fixed sum is not to be altered in any manner by the bidder. Should the amount shown be altered, the new figures will be disregarded, and the original price will be used to determine the total amount bid for the contract.
- B. The payment(s) made under this item will be equal to the Final Cost Memo prepared by the Commissioner and executed by the parties in accordance with 1.2(F) above as proof of work performed for this item as approved by the Commissioner.
- C. The total estimated cost of this item is the "fixed sum" amount shown for this item in the Bid Submission Form and shall not be varied in the bid. The "fixed sum" amount is included in the bid solely to ensure that sufficient monies will be available to pay the Contractor for this work, which may be more or less than the fixed sum amount.
- D. The price will cover the cost of all labor, materials, equipment, insurance, and incidentals necessary to complete the work under this section in accordance with the Contract Drawings, the specifications, and the directions of the Commissioner.

PART II – PRODUCTS (Not Used)
PART III – EXECUTION (Not Used)

END OF SECTION 01 22 00

EXPANDED WORK ALLOWANCE
01 22 00 - 2



**SECTION 01 31 00
PROJECT MANAGEMENT AND COORDINATION**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. LEED: Refer to the Addendum to identify whether this Project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
- C. COMMISSIONING: Refer to the Addendum to identify whether this Project will be commissioned by an independent third party under separate contract with the City of New York (City). Commissioning will be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS, and/ or Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE COMMISSIONING. The Contractor must cooperate with the commissioning agent and provide whatever assistance is required.

1.2 SUMMARY:

- A. This Section includes administrative provisions for coordinating construction operations on the Project, including:
 - 1. Coordination Drawings
 - 2. Administrative and supervisory personnel
 - 3. Project meetings
 - 4. Requests for Interpretation (RFIs)
- B. This Section includes the following:
 - 1. Definitions
 - 2. Coordination
 - 3. Submittals
 - 4. Administrative and Supervisory Personnel
 - 5. Project Meetings
 - 6. Requests for Interpretation (RFI's)
 - 7. Correspondence
 - 8. Contractor's Daily Reports
 - 9. Alternate and Substitute Equipment
- C. Related Sections:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 3. Section 01 33 00 SUBMITTALS
 - 4. Section 01 35 26 SAFETY REQUIREMENTS
 - 5. Section 01 73 00 EXECUTION REQUIREMENTS
 - 6. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL



7. Section 01 77 00 CLOSEOUT PROCEDURES

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" must mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 COORDINATION:

- A. Coordination: The Contractor must coordinate its construction operations, including those of its subcontractors, with other entities to ensure the efficient and orderly installation of each part of the Work. The Contractor must coordinate the various operations required by different Sections of the Specifications that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence in order to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 - 2. Coordinate installation of different components to ensure maximum access for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
 - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and access for required maintenance, service, and repair of all components, including mechanical and electrical.
- B. The Contractor must prepare memoranda for distribution to its subcontractors and other involved entities, outlining special procedures required for coordination. Such memoranda must include required notices, reports, and meeting minutes as applicable.
- C. Administrative Procedures: The Contractor must coordinate scheduling and timing of required administrative procedures with other construction activities and activities of its subcontractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include without limitation the following:
 - 1. Preparation of Contractor's Construction Schedule.
 - 2. Installation and removal of temporary facilities and controls.
 - 3. Delivery and processing of submittals.
 - 4. Progress meetings.
 - 5. Pre-installation conferences.
 - 6. Startup and adjustment of systems.
 - 7. Project closeout activities.
- D. Conservation: The Contractor must coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.
- E. Salvaged Items, Material and/or Equipment: The Specifications may identify certain items, materials or equipment which must be salvaged by the Contractor and handled or disposed of as directed. The



Contractor must comply with all directions in the Specifications regarding the salvaging and handling of identified items, material or equipment.

- F. Software: The Contractor may be required by the Commissioner to utilize a designated cloud-based Construction Management Tool to streamline and manage activities, including but not limited to the following:
1. Submittals;
 2. Drawings, Specifications, and Bulletins;
 3. RFI's;
 4. Progress Photographs;
 5. Letters and Correspondence;
 6. Punchlists and Closeout Management;
 7. Daily Logs;
 8. Meetings and Minutes; and/or,
 9. Change Order log memos.

1.5 SUBMITTALS:

- A. Submit shop drawings, product data, samples etc., in compliance with Section 01 33 00 SUBMITTAL PROCEDURES.
- B. Coordination Drawings: The Contractor must prepare applicable Coordination Drawings in compliance with the requirements for Coordination Drawings in Section 01 33 00 SUBMITTAL PROCEDURES.
- C. Safety Plan in compliance with Section 01 35 26 SAFETY REQUIREMENTS PROCEDURES.
- D. Waste Management Plan in compliance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- E. Key Personnel Names: Within fifteen (15) Days after the Notice to Proceed (NTP), the Contractor must submit a list of key personnel assignments of the Contractor and its subcontractors, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in case of the absence of individuals assigned to Project.
1. Post copies of the list in Project meeting room, in temporary field office, and by each temporary telephone. Keep the list current at all times.
 2. In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work. Include special personnel required for coordinating all operations by its subcontractors.

1.6 PROJECT MEETINGS:

- A. General: The Resident Engineer will hold regularly scheduled construction progress meetings at the site, at which time the Contractor and appropriate subcontractors must have their representatives present to discuss all details relative to the execution of the work. The Resident Engineer will preside over these meetings.
1. Agenda: Prior to each meeting, the Resident Engineer will consult with the Contractor and will prepare an agenda of items to be discussed. In general, after informal discussion of any item on the agenda, the Resident Engineer will summarize the discussion in a brief written statement, and the Contractor will then dictate a brief statement for the record.



2. Coordination: In addition to construction progress meetings called by the Resident Engineer, the Contractor must hold regularly scheduled meetings for the purpose of coordinating, expediting and scheduling the work in accordance with the master coordinated Job Progress Chart. The Contractor and its subcontractors, material suppliers or vendors whose presence is necessary, are required to attend. These meetings may, at the discretion of the Contractor, be held at the same place and immediately following the Project meetings held by the Resident Engineer. Minutes of these meetings must be recorded, typed and printed by the Contractor and distributed to all parties concerned.
- B. Preconstruction Kick-Off Meeting:
1. The Resident Engineer will schedule a preconstruction kick-off meeting either at DDC's main office or at the Project site to review responsibilities and personnel assignments and clarify the role of each participant. Unless otherwise directed, the Design Consultant will record and distribute meeting minutes.
 2. Attendees: Authorized representative of the Sponsor Agency; Design Consultant; the Contractor and its superintendents, subcontractor(s) and their superintendent(s); LEED sub-consultant and Commissioning Authority /Agent (CxA) as applicable and other concerned parties. All participants at the meeting must be familiar with the Project and authorized to conclude matters relating to the Contract Work.
 3. Agenda: Includes without limitation the following as applicable:
 - a. Establishing construction schedule;
 - b. Schedule for regular construction meetings;
 - c. Phasing;
 - d. Critical Work sequencing and long-lead items;
 - e. Designation of key personnel and their duties;
 - f. Reviewing application for payment and change order procedures;
 - g. Procedures for RFIs;
 - h. Review permits and approval requirements;
 - i. Review all recent administrative code reporting requirements relating to the Project, (i.e. LL 77, LL86 etc.);
 - j. Procedures for testing and inspecting;
 - k. Reviewing special conditions at the Project site;
 - l. Distribution of the Contract Documents;
 - m. Submittal procedures;
 - n. Safety procedures;
 - o. LEED requirements;
 - p. Commissioning requirements;
 - q. Preparation of record documents;
 - r. Historic Treatment requirements;
 - s. Use of the premises;
 - t. Work restrictions;
 - u. Sponsor Agency occupancy requirements;
 - v. Responsibility for temporary facilities, services, and controls;
 - w. Construction Waste Management and Disposal;
 - x. Indoor Air Quality Management Plan;



- y. Dust Mitigation Plan;
 - z. Office, work, and storage areas;
 - aa. Equipment deliveries and priorities;
 - bb. Security;
 - cc. Progress cleaning; and,
 - dd. Working hours;
- C. Construction Progress Meetings:
- 1. The Resident Engineer will schedule and conduct construction progress meetings at bi-weekly intervals or as otherwise determined. All participants at the meeting must be familiar with the Project and authorized to conclude matters relating to the Work. Unless otherwise directed, the Design Consultant will record and distribute meeting minutes.
 - 2. Attendees:
 - a. Design Consultant and applicable sub-consultants;
 - b. Sponsor Agency Representative;
 - c. Representatives from the Contractor, sub-contractor(s), suppliers or other entities involved in the current progress, planning, coordination or future activities of the Work; and,
 - d. Other appropriate DDC personnel, DDC consultants and concerned parties.
 - 3. Agenda: Includes without limitation the following:
 - a. Review the Construction Schedule and progress of the Work. Determine if the Work is on time, ahead of schedule or behind schedule. Determine actions to be taken to maintain or accelerate the schedule;
 - b. Review and approve prior meeting minutes and follow up open issues;
 - c. Coordinate work between each subcontractor;
 - d. Sequence of Operations;
 - e. Status of submittals, deliveries, and off-site fabrication;
 - f. Status of inspections and approvals by governing agencies;
 - g. Temporary facilities and controls;
 - h. Review Site Safety;
 - i. Quality and work standards;
 - j. Field observations;
 - k. Status of correction of deficient items;
 - l. RFI's;
 - m. Pending changes;
 - n. Status of outstanding payments and change orders;
 - o. LEED requirements including Construction Waste Management, Indoor Air Quality Plan, Dust Mitigation and Commissioning; and,
 - p. Status of Administrative Code reporting requirements related to the Project.
- D. Preinstallation Conferences:
- 1. The Contractor will conduct a preinstallation conference at project site before each construction activity when required by other specification Sections and when required for coordination with other construction.
 - 2. Attendees:



- a. Contractor and its superintendents
- b. Applicable subcontractor(s)
- c. Representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow.
3. Advise the Commissioner of scheduled preinstallation conference meeting dates.
4. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents
 - b. Related RFI's
 - c. Deliveries
 - d. Submittals
 - e. Review of mockups
 - f. Possible conflicts
 - g. Compatibility requirements
 - h. Time schedules
 - i. Weather limitations
 - j. Manufacturer's written instructions
 - k. Warranty requirements
 - l. Compatibility of materials
 - m. Acceptability of substrates
 - n. Temporary facilities and controls
 - o. Space and access limitations
 - p. Testing and inspecting requirements
 - q. Installation procedures
 - r. Coordination with other work
 - s. Required performance results
 - t. Protection of adjacent work

1.7 REQUESTS FOR INFORMATION (RFI):

- A. Procedure: Immediately on discovery of the need for information or interpretation of the Contract Documents, and if not possible to request interpretation at Project meeting, the Contractor must prepare and submit an RFI in the form specified by the Resident Engineer.
 1. RFI must originate with the Contractor. RFIs submitted by entities other than Contractor will be returned with no response.
 2. Coordinate and submit RFI in a prompt manner to the Resident Engineer so as to avoid delays in Contractor's Work or Work of its subcontractors.
 3. RFI Log: The Contractor must prepare, maintain, and submit a tabular log of RFIs organized by the RFI number monthly to the Resident Engineer, or more frequently if directed by the Resident Engineer.
 4. On receipt of responses and action to the RFI, the Contractor must update the RFI log and immediately distribute the RFI response to affected parties. Review response(s) and notify the Resident Engineer immediately if the Contractor disagrees with response(s).



1.8 CORRESPONDENCE:

- A. Copies of all correspondence to DDC must be sent directly to the Resident Engineer at the job site.

1.9 CONTRACTOR'S DAILY REPORTS:

- A. The Contractor must prepare and submit Daily Construction Progress Reports as outlined in Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 31 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 32 00
CONSTRUCTION PROGRESS DOCUMENTATION**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required Work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for establishing an effective base line schedule for the Project and documenting the progress of construction during performance of the Work by developing and revising as necessary, various documents including but not limited to the following:
 - 1. Submittals schedule
 - 2. Daily construction reports
 - 3. Material location reports
 - 4. Field condition reports
 - 5. Special reports

- B. RELATED SECTIONS:

1. Section 01 10 00	SUMMARY
2. Section 01 32 22	PHOTOGRAPHIC DOCUMENTATION
3. Section 01 32 16.10	PROJECT SCHEDULES (METHOD A)
4. Section 01 32 16.20	PROJECT SCHEDULES (METHOD B)
5. Section 01 32 16.30	PROJECT SCHEDULES (METHOD C)
6. Section 01 33 00	SUBMITTAL PROCEDURES
7. Section 01 40 00	QUALITY REQUIREMENTS

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

- B. Design Consultant: "Design Consultant" must mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.



PART II – PRODUCTS

2.1 SUBMITTALS SCHEDULE:

- A. Preparation: The Contractor must submit a schedule of submittals, arranged in chronological order by dates required by the construction schedule. Include time required for review, re-submittal, ordering, manufacturing, fabrication, and delivery when establishing dates. The Submittals Schedule must show all of the following types of submittals:
1. Shop and Coordination Drawings
 2. Material Samples
 3. Catalog Cuts
 4. Test and Evaluation Reports
 5. Field Test Reports
 6. Sample Warranties
 7. Certificates
 8. Qualification Data
 9. Closeout Submittals
- B. Submittals: At the kick-off meeting, the Contractor must have a preliminary Submittals Schedule, and must review this Schedule with the Resident Engineer and the Design Consultant. Within ten (10) Days after the kick-off meeting, the Contractor must complete the Submittals Schedule, including all submission dates, required delivery dates, and fabrication times. The Contractor must include an updated Submittals Schedule with all Progress Payment applications.
- C. Review: The Resident Engineer will review the Submittals Schedule submitted by the Contractor. Upon acceptance, the Resident Engineer will date and sign the schedule as approved and transmit it to the Design Consultant, Contractor, and others within DDC as the Resident Engineer deems appropriate. If so directed by the Commissioner, the Contractor must revise the Submittals Schedule to indicate a submission date for specified shop drawings and/or material samples within sixty (60) Days after the kick-off meeting. The Contractor must resubmit the Submittals Schedule as necessary to include all review comments.

2.2 REPORTS:

- A. Daily Construction Reports: The Contractor must submit to the Resident Engineer written Daily Construction Reports at the end of each day that work was performed, recording basic information such as the date, day, weather conditions, and contract days passed, remaining contract duration/days and the following information concerning the Project.

Information: The reports must be prepared by the Contractor's Superintendent and must bear the Contractor's Superintendent's signature. Each report must contain the following information:

1. List name of Contractor, subcontractors, their work force in each category, and details of activities performed;
2. The type of materials and/or major equipment being installed by the Contractor and/or by each subcontractor;
3. The major construction equipment being used by the Contractor and/or subcontractors;
4. Material and Equipment deliveries;
5. High and low temperatures and general weather conditions;
6. Accidents;
7. Meetings and significant decisions;
8. Unusual events;
9. Stoppages, delays, shortages, and losses;
10. Meter readings and similar recordings;



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

11. Emergency procedures;
12. Orders and/or requests of authorities having jurisdiction;
13. Approved Change Orders received and implemented;
14. Field Orders and Directives received and implemented;
15. Services connected and disconnected;
16. Equipment or system tests and startups;
17. Partial Completion(s) and occupancies; and,
18. Substantial Completion(s) authorized;

NOTE: If there is NO ACTIVITY at site, a daily report indicating so and the reason for no activity at the site must be submitted.

- B. Material Location Reports: The Contractor must submit a Material Location Report at weekly OR monthly intervals as determined and established by the Resident Engineer. Such report must include a comprehensive list of materials delivered to and stored at Project site. List must be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit a Request For Information (RFI) form with a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

2.3 SPECIAL REPORTS:

- A. Accident report, incident report, special condition report for the conditions out of control of any party involved with the Project effecting Project progress, explaining impact on the Project schedule and cost if any.

PART III – EXECUTION (Not Used)

END OF SECTION 01 32 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 32 16.10
PROJECT SCHEDULES (METHOD A)**

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 16.10

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Methods
 - 2. Definitions
 - 3. Preliminary, Baseline, and Project Schedule Preparation Timeline
 - 4. Preliminary Project Schedule Development
 - 5. Project Schedule
 - 6. Activity and Calendar Coding Structure
 - 7. Work Breakdown Structure (WBS)
 - 8. Major Milestones
 - 9. Short (Three-Week) Interval/Two-Week Look-Ahead
 - 10. Submittals
 - 11. Project Schedule Updating
 - 12. Time Impact Analysis

1.3 METHODS:

- A. The Contractor must comply with Project schedule development and updating requirements as specified herein.
 - 1. The Contractor must employ or retain the services of a Construction Scheduler with verifiable construction scheduling experience, subject to review and acceptance by the City. Upon request, the Contractor must provide the City with details of qualifications and experience of the proposed scheduling staff member(s).
 - 2. The Contractor must prepare, update, and maintain a detailed Project Schedule using a version of scheduling software that is compatible with the City's Oracle Primavera P6 Enterprise Project Portfolio Management (EPPM). All schedule submittals must be developed using Oracle's Primavera P6 EPPM software. Schedules must be developed using accepted CPM techniques using the precedence diagramming method (PDM). The Project Schedule must be developed following Defense Contract Management Agency (DCMA) and American Association of Cost Engineering International (AACE International) guidance. The Contractor will be required to use the Contractor's



own P6 license (whether single-user or Enterprise license), unless otherwise directed by the Commissioner. If directed by the Commissioner prior to the Notice to Proceed (NTP), the Contractor must use the Department’s P6 Enterprise license and develop the Progress Schedule within the Department’s Enterprise environment.

3. Once the Baseline Schedule is accepted by the City, progress updates to the Project Schedule must be submitted monthly, unless otherwise directed by the City, until Substantial Completion. The Data Date for the schedule updates must use the last Friday of the month, or as directed by the City.
4. The Contractor will be responsible for providing the monthly schedule updates once the Baseline Schedule is approved. Each monthly schedule update must be accompanied with a schedule narrative that explains the following:
 - a. The progress of work during that particular period of performance,
 - b. Any changes in schedule Logic,
 - c. The physical conditions that were used to update every Activities Percent Complete,
 - d. Any change in actual Start and Finish Dates,
 - e. Any Duration changes,
 - f. Any added and deleted Activities, and
 - g. Any added Extra Work (e.g. change orders).

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Activity	A representation of a discrete portion of the overall scope of Work or an event through Duration and description in a CPM schedule.
Baseline Schedule	The planned and detailed CPM schedule of Activities, including all Logic, Durations, Resource and Cost Loading, and showing the entire scope of Work. The Baseline Schedule must be accepted by the City.
Critical Path	The longest sequence of Activities in a network which establishes the minimum length of time for accomplishment of the end event of the Project.
Critical Path Method (CPM)	A management technique used to plan and control a Project which combines all relevant information into a single plan defining the sequence and Duration of operations and depicting the interrelationship of the Work elements required to complete the Project.
Current Schedule	The most recently updated schedule that captures progress to date and forecasts the dates for each Activity.
Data Date	The date used as a starting point for scheduling calculations. The Data Date is changed to the current end of period date when a schedule is updated for progress.
Duration	The amount of time, in workdays, an Activity will take to perform.



<u>Term</u>	<u>Definition</u>
Finish Date	The earliest estimated date an Activity is calculated to be complete, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Free Float	The calculated amount of time that the estimated start or finish of an Activity can be delayed without impacting the start or finish of other downstream Activities logically connected in a progressive relationship. (See Finish Date and Late Finish).
Fragnet	Fragmentary network: a portion of a schedule detailing impacts of an event on specific Activities in the broader schedule.
Inclement Weather	Any weather condition, the duration of which varies in excess of the 3-year average published by the National Oceanic and Atmospheric Administration (NOAA) information for the local area.
Integrated Project Schedule	The Commissioner's overall schedule covering design, procurement and construction. The Commissioner will use the Contractor's Project Schedule to update the Integrated Project Schedule.
Late Finish	An estimate of the latest plausible date an Activity's completion can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Late Start	An estimate of the latest plausible date an Activity's start can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Logic	A direct progressive relationship between Activities where one Activity's performance restricts the performance of another Activity.
Milestone	A key or critical point in time for reference or measurement.
Network Diagram	A graphic diagram of a network schedule, showing Activities and Activity relationships.
Original Duration	The estimated amount of time, in Work Days, an Activity is expected to take to complete at the beginning of a Project as anticipated by the Contractor based on its planned means and methods at time of bid and documented in the Baseline Schedule.
Percent Complete	The percentage of the scope of Work represented by an Activity completed as of the Data Date calculated as physical percent complete for payment purposes.
Project Schedule	The Contractor's schedule used to manage the orderly and expeditious completion of the Work. The Project Schedule is initially the accepted Baseline Schedule, and is updated throughout the Project.
Remaining Duration	The amount of time, in Work Days, the remaining scope of Work represented by an Activity is expected to take to complete, measured from the current Data Date.



<u>Term</u>	<u>Definition</u>
Resource and Cost Loading	Values assigned for estimated dollars, manpower, equipment and/or materials necessary to complete the scope of Work represented by a specific Activity.
Recovery Schedule	A Recovery Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the Project within the stipulated contract Duration, plus authorized time extensions. In such case, special attention must be given to minimize delays as much as possible and must establish the nature of efforts; for instance, resources and equipment required, extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors, consultants, clients, end users and/or other concerned parties to recover the schedule.
Revised and/or Updated Schedule	A Baseline Schedule, Progress Project Schedule, or Recovery Schedule for the Project that shows the actual Duration of all the completed Activities, including Duration of and the reasons for delays, if any has occurred, AND revisions to all remaining Activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined Activities. Any such revisions should be shown on the row just below the approved schedule of the respective Activity so that revisions can be compared. The Revised and/or updated Schedule must be reviewed and approved by the City.
Start Date	The earliest estimated date an Activity is calculated to begin, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Time Impact Analysis	A forward looking (prospective) schedule analysis used to forecast the impact to the Critical Path and to Milestone Finish Dates caused by a single event or series of events. Time Impact Analysis is not a retrospective (forensic) schedule analysis or a what-if schedule analysis of a potential event.
Total Float	The amount of time the start or finish of an Activity can be delayed without affecting the Project completion date.
Work Breakdown Structure (WBS)	WBS is a deliverable-oriented decomposition of a Project into smaller components. A WBS provides the necessary framework for detailed cost estimating and control along with providing guidance for schedule development and control.
Work Days (WD)	Work Days are every consecutive day in the calendar, excluding weekends (Saturday and Sunday) and holidays.

1.5 PRELIMINARY, BASELINE, AND PROJECT SCHEDULE PREPARATION TIMELINE:

- A. Upon receipt of the NTP, the Contractor must promptly prepare a preliminary Project Schedule and subsequently a Baseline Schedule and must submit for the City’s acceptance as follows:
 1. The preliminary Project Schedule must be submitted no later than fifteen (15) Days after NTP.
 2. The initial submittal of the Baseline Schedule must be provided to the City for review no later than thirty (30) Days after NTP.



3. The Contractor must incorporate all corrections and revisions required by the City and provide an updated version of the Baseline Schedule for review and acceptance no later than sixty (60) Days after NTP to ensure that the Baseline Schedule is accepted. The sixty (60) Days must include fourteen (14) Days review times for each submittal of the Baseline Schedule.
4. Once accepted, the Baseline Schedule will be the basis of Project Schedule updates.

1.6 PRELIMINARY PROJECT SCHEDULE DEVELOPMENT:

- A. The preliminary Project Schedule must be a detailed plan (division level per Construction Specifications Institute (CSI) MasterFormat) of all operations, including submittals, permitting, testing, and construction Activities, for either the first ninety (90) Days after NTP or to the point where the Contractor plans to mobilize on site (whichever is greater). This submittal will also depict a summary level (section level per CSI MasterFormat) schedule of the major Activities for the remainder of the Work.
 1. All Activities for Contractor mobilization, procurement, and construction Activities within the first sixty (60) Days, including permits and submittals. All remaining work forecasted after the first sixty (60) Days must be summarized through the Contract's completion date.
 2. All submittal and procurement Activities for long lead items.
 3. The Project's Critical Path.
 4. An electronic copy of the schedule in either MS Project (.MPP) or Primavera P6 Professional Format (.XER).
- B. The preliminary Project Schedule will be reviewed by the City and returned with comments, as necessary, within fourteen (14) Days of submittal receipt. Information from the preliminary Project Schedule will be the general foundation for development of the Baseline Schedule.

1.7 PROJECT SCHEDULE:

- A. The Baseline Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- B. After the Baseline Schedule is approved, the Project Schedule must be the Contractor's working schedule and must be used to plan, organize, execute, and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete the Work.
- C. The Project Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- D. The Project Schedule must be the Contractor's working schedule used to plan, organize, execute, and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete all remaining Work.
- E. All delay claims must be based on the current approved updates of the Project Schedule.
- F. The Contractor must confirm in writing that all subcontractors performing any portion of the Work are in agreement with the accepted Baseline Schedule and the monthly updates.
- G. The amount of detail represented in the Baseline and Project Schedule and supporting documents submitted must, at a minimum, include the following items:



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

1. Contract Milestones must be identified and included in the Baseline and Project Schedule.
 2. All submittal, owner review & approval, purchase, manufacture, and delivery Activities for all major materials and equipment.
 3. Deliveries of owner-furnished equipment and/or materials.
 4. Preparation, submittal, and approval of drawings, material samples, and safety plans.
 5. Preparation, submittal, review, and approval of permits required by all regulatory agencies and other third parties.
 6. Performance of tests, submission of test reports, and approval of test results.
 7. Commissioning Activities for all commissioned systems and equipment is to be clearly delineated and scheduled such that they will be completed prior to Substantial Completion. Such Activities must include, at a minimum, Pre-Functional testing and check sheets; Testing, Adjusting, and Balancing (TAB) verification; Functional Testing, including testing of all controls; and Owner's demonstration and orientation.
 8. Completion dates of all items required for phased completion (if applicable).
 9. Completion dates of all items required for Substantial Completion.
 10. Completion dates of all items required to obtain a Temporary Certificate of Occupancy (TCO) and Certificate of Occupancy (CO).
 11. Completion dates for close-out of regulatory and punch list items prior to Final Acceptance and transfer of the Project.
 12. Any additional detail requested by the Commissioner.
- H. Activities identified in the Baseline and Project Schedule must have the Duration in units of whole Work Days. Construction Activity Durations must not exceed twenty (20) Work Days unless specifically approved by the City. This is to ensure that Activities are not generalized and that each Activity and sub-Activity are defined as narrowly as reasonable to facilitate schedule tracking. Durations for non-construction Activities such as procurement of materials, delivery of equipment, concrete curing, etc., may exceed twenty (20) Work Days without prior approval; however, these are still subject to review by the City. Durations must be based on the available resources required for performing each Activity and must be the result of definitive labor hours using established production rates, and with consideration of on-site working conditions. If requested by the City, the Contractor must justify the reasonableness of a planned Duration.
- I. Activity descriptions must use plain language that clearly and uniquely defines each Activity. Each description must include a verb or work function (e.g. submit, form, pour, etc.), an object (e.g. slab, foundation, etc.) and, for any construction Activities, a specific location. The Work related to each Activity must be limited to one responsibility and one trade.
- J. Activity relationships must be assigned to clearly establish predecessor and successor relationships to each Activity. Open-ended Activities are not permitted with the exception of the first and last Activity in the network, the first Activity being NTP and the last being Final Acceptance. The use of relationship lag times is discouraged and only permitted with prior approval by the City. The use of negative lag is never permitted.
- K. Activity constraint dates are only to be used to reflect contractual constraints unless specifically authorized by the City.
- L. Float or slack, in any schedule, must not be for the exclusive use or benefit of either the City or the Contractor, but must be available for use by both the City and the Contractor.
- M. Each resubmittal after the Project Schedule is delivered for acceptance must comply with all requirements of this section. Review and response by the City will be given within fourteen (14) Days after resubmission. The Contractor's receipt of the comments within the time specified must not, in any way, affect the Contractor's responsibility to complete the Project within the time fixed in Schedule A.
- N. Failure by the City to return comments or indicate acceptance status will in no way relieve the Contractor's obligation to submit monthly schedule updates.



- O. At the request of the City, the Contractor must be required to make a presentation to explain or clarify the intended logical sequence of construction Activities depicted in the detailed Project Schedule. The Contractor and designated scheduler must discuss anticipated challenges and outline construction methodology and flow of work to show how and when major Milestones will be achieved. In addition, the Contractor may, at no cost to the City, be required to participate in additional Project meetings necessary to obtain acceptance of the above-noted submittals.

1.8 ACTIVITY AND CALENDAR CODING STRUCTURE:

- A. The Baseline and Project Schedules must contain a sufficient number of Activities to represent adequate planning and execution of the Work so that it shows an accurate flow of work and demonstrates an understanding of the Project by the Contractor.
- B. Activity ID and Calendar Coding
 - 1. The Contractor’s proposed Activity and calendar coding and must be submitted with the preliminary Project Schedule. A meeting may be requested by the City to discuss the scheme and other schedule information prior to the submittal of the Project Schedule. The accepted coding scheme and WBS Structure must be incorporated into the Project Schedule.
- C. Activity ID Coding
 - 1. All Activities/ Resources/ Calendars (Baseline and Project Schedules) must be coded inside the P6 Project Environment / Project Level (NOT the Global Environment/ Enterprise Level) to facilitate selection, sorting and preparation of reports.
 - 2. Activity coding must consist of the Project ID followed by a dash, followed by Activity coding (PROJECT ID-ACTIVITY CODE). Activity codes must be created at the Project level and must utilize the coding scheme outlined in the table below:

Activity Code	Meaning
RESP	<u>Responsibility</u> : Identify the party (e.g. Contractor, subcontractor, City, etc.) responsible for the Activity.
PHAS	<u>Phase</u> : Breakdown of Activities in Milestones, pre-construction, procurement, construction and close-out Activities.
LOCN	<u>Location</u> : Breakdown by floor or elevation.
AREA	<u>Area</u> : Breakdown by room, area, block or wing. May be used as a subdivision of PHAS to include Milestones, permits, subcontractor approvals, submittals, fabrication and delivery, and subdivision of the Site and buildings into Logical modules, such as by blocks, wings, etc.
TRAD	<u>Trade</u> : Breakdown by CSI Code or section number in the Specifications.

- a. Description of schedule Activities must include terminology that represents the scope of work associated with that particular Activity. Terminology used to describe similar actions must be consistent across all segments of work.
- b. Naming convention for schedule Activities must be descriptive and indicate the associated work covered by the Activity. Activities must use a verb, noun, and location of the work in the Activity name.



3. Project Calendar Coding
 - a. All calendars created and assigned to Activities must be Project-level calendars. The Calendar Name must consist of the Project ID number followed by a dash, followed by a descriptive Calendar Name (PROJECT ID-CALENDAR NAME).

1.9 WORK BREAKDOWN STRUCTURE:

- A. Structure must be submitted with the preliminary Project Schedule. The levels (nodes) must include, but not be limited to:
 1. LEVEL 01 – The Project Level.
 2. LEVEL 02 – Contains a minimum of four (4) nodes: Pre-Construction, Procurement, Construction or Phase of Construction, and Closeout.
 3. LEVEL 03 – Decomposition of each of the four (4) nodes in Level 02 into its constituent parts. This level must target specific, tangible, deliverable scopes of Project Work.
- B. The Contractor's proposed WBS must be submitted with the preliminary Project Schedule. The accepted WBS Structure must be incorporated into the Baseline and Project Schedule.

1.10 MAJOR MILESTONES:

- A. The schedule must include both contractual and non-contractual Milestones that are provided by the City. These Milestones must be properly associated with the related Work and maintained to represent the progress of the Project.

1.11 SHORT (THREE-WEEK) INTERVAL / TWO-WEEK LOOK-AHEAD:

- A. On a bi-weekly basis, the Contractor must provide a three (3) week short interval schedule in a format satisfactory to the City. The purpose of this schedule is to report the actual progress of the past week against the previous short interval look-ahead Activities and add any additional Activities planned for the next two (2) weeks. Electronic files and hard copies must be provided to the City on the first day of each work week with the prior week's actual progress included.
- B. Each task listed on the short interval schedule must be representative of the most current Project Schedule Update and include a reference to an Activity shown on the current update.

1.12 SUBMITTALS:

- A. General
 1. Development of the Baseline Schedule and updating of the Project Schedule must follow the DCMA and AACE International guidelines.
 2. Each electronic submission of the Project Schedule must be assigned a unique file name consisting of the Project ID (as noted on the NTP followed by a dash followed by a unique file name clearly marked (i.e. ProjID- B000 = B/L rev0, ProjID-B001 = B/L rev01 etc.) to indicate the specific submission. Similarly, update submittals must be named ProjID-Uxxx where xxx is a sequential number, starting with 001, indicating the revision or issue number.
 3. The Contractor must provide all submittals in electronic format and two hard copies.
- B. Preliminary Project Schedule



1. For acceptance of the preliminary Project Schedule, the Contractor must submit the following:
 - a. Two (2) 11" x 17" hard copies of the proposed preliminary Project Schedule, as well as the native electronic schedule data file, in .XER file format, per the direction of the City.
 - b. A Schedule Narrative Report detailing the Contractor's initial plan for executing the Contract work within the allotted Contract Duration, and include the following explanation of their provided preliminary schedule:
 - i. The proposed WBS;
 - ii. All proposed Project Calendars;
 - iii. All proposed Activity Codes, clearly defined;
 - iv. The proposed Activity ID format; and
 - v. Schedule basis narrative, which must memorialize assumptions made in the development of the schedule.

C. Baseline Schedule

1. The City will normally return comments within ten (10) Work Days after receipt of the initial Project Schedule Submission. If any of the required submissions are returned to the Contractor for corrections or revisions, they must be resubmitted within five (5) Work Days from receipt of comments. Each resubmittal must comply with the requirements enumerated above. Review and response by the City will be given within ten (10) Work Days after resubmission.
2. At the request of the City, the Contractor will be required to participate in Project meetings necessary to obtain an acceptance of the above noted submittals.
3. Baseline Schedule submittal must contain a Narrative Report. It must include the following, or as directed by the City:
 - a. A description of the Project scope and how the Work is represented in the schedule Activities;
 - b. A description of the overall sequence of major components of Work;
 - c. Planned work week for each definable feature of work;
 - d. Description of the Critical Path and near Critical Paths;
 - e. How weather will be accommodated in the schedule, including a description of the weather calendar and the Activities it is applied to, and the NOAA Inclement Weather data that defined the number of non-work days;
 - f. How regulatory, operational or third-party constraints are accommodated in the schedule;
 - g. Description of key Project coordination points or events;
 - h. Discussion of long lead items and basis of time frames for submittals; and
 - i. Potential opportunities and risks, including quantification of the schedule reduction or expansion.

D. Project Schedule Updates

1. Every schedule submittal must be provided with a corresponding narrative. These schedule submittals and narratives are to be submitted in hard copy, as well as in the native electronic format, as attachments to emails or other media accepted by the City. When opened, the electronic format must provide flawless restoration of the native files (P6 (.XER) for Primavera and MS Word and/or Adobe Acrobat for Narrative and supporting document submittals).



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

2. For each submittal of the updated Project Schedule, the following layouts, reports, and graphics are required in the specified formats, unless otherwise directed by the City:
 - a. The Contractor must furnish two (2) 11" x 17" color hard copies of the complete progress schedule with each initial schedule update and final update incorporating comments furnished by the City. Additionally, the Contractor must provide the native electronic schedule data file, in .XER file format with the initial and final schedule update submission.
 - b. An Activity bar chart Layout grouped by Activity Code and then sorted by Start Date, Finish Date, and then Total Float.
 - c. Each Activity line must display the Activity ID (Act ID), Description (Name), Original Duration (OD), Remaining Duration (RD), Start Date (ES), Finish Date (EF), and Total Float (TF), Baseline Original Duration (BL OD) Baseline Start (BL Start), Baseline Finish (BL Fin), Baseline Total Float (BL TF).
 - d. An Activities progress bar must show both current progress update ES and EF, and baseline ES and EF. The top line of the bar chart area must contain the updated ES and EF; the second line below must depict the accepted baseline ES and EF dates.
3. The City may request additional standard P6 reports from time to time at no additional cost.
4. The Monthly Update submittal must contain a Narrative Report. It must include the following, or as directed by the City:
 - a. Any changes to the schedule basis narrative;
 - b. Overall health of the Project;
 - c. Actual Activity Start Dates;
 - d. Actual Activity Finish Dates;
 - e. The physical conditions that were used to update Activities percent complete;
 - f. Percent of Work reported in place;
 - g. A description of the overall sequence of major components of Work;
 - h. Description of the Critical Path and near Critical Paths;
 - i. Description of key Project coordination points or events;
 - j. Discussion of long lead items and basis of time frames for submittals;
 - k. Potential opportunities and risks, including quantification of the schedule reduction or expansion;
 - l. Assumptions/exclusions made in the schedule;
 - m. Contract and Milestone completion date status:
 - i. Number of Days ahead or behind schedule and; and
 - ii. Days lost/gained compared with the previous update.
 - n. Lookahead report listing each Activity in the CPM schedule that is scheduled to be performed during the next reporting period;
 - o. Changes in Activity description, Logic, or Duration must be submitted as a separate Proposed Schedule and approved by the City prior to being submitted as an official update. Once allowed, said changes must be grouped and organized in the report in a manner that communicates in detail the rationale associated with each change and



the impact upon construction sequence, relationships and the Critical Path. A standard Digger Report is not sufficient to meet this requirement;

- p. Added/deleted Activities and the rationale associated with each action;
- q. Pending issues and status of other items;
- r. Permits;
- s. Contract modifications; and
- t. Extra Work, including change orders.

1.13 PROJECT SCHEDULE UPDATING:

- A. The initial updating must take place immediately after the City accepts the Contractor's Baseline Schedule. The Data Date for the first update must not exceed seven (7) Days from the date of receipt of the accepted Baseline Schedule, or as directed by the City.
- B. Subsequent updates of the Project Schedule must be submitted monthly until Substantial Completion. The schedule Data Date must be the last Work Day of the period unless otherwise directed by the City. Updates must be provided to the City no later than seven (7) Days after the 'schedule Data Date'.
- C. Updates must reflect actual or reasonably anticipated progress as of the last Work Day of the period.
- D. The City may request meetings with the Contractor to review the Project Schedule and narrative and jointly verify Project health and information.
- E. In addition, the City may request meetings with the Contractor's scheduling representative to:
 - 1. Resolve out-of-sequence Logic.
 - 2. Should out-of-sequence progress occur where Activities have reported progress without predecessor Activities being completed, the Contractor must obtain the City's approval in a Proposed Schedule before revising the Logic ties to reflect the way the Work is actually being performed. Use of progress override by default mechanisms that may be included in CPM scheduling software systems will not be allowed except on a case-by-case basis with the approval of the City. A written explanation for each instance must be included in the monthly submittal narrative.
 - 3. Assess the impact, if any, of any pending change orders.
 - 4. Incorporate accepted time extensions.
 - 5. Review revised Logic (as-built and projected) and changes in Activity Duration, cost, and labor hours assigned.
- F. Contractor's failure to provide required scheduling information within the required timeframe or to adhere to the currently accepted schedule may result in rejection of all or a portion of the progress payment until such time as the required schedule information is submitted and accepted by the City.
- G. Delays to the Critical Path – Whenever it becomes apparent from the monthly CPM schedule update that delays to the Critical Path have occurred due to action or inaction of the Contractor, and as a result the date for Substantial Completion will not be met, the Contractor must promptly take some or all of the following actions at no additional cost to the City, unless otherwise directed by the City:
 - 1. Increase construction manpower in such quantities and crafts as will substantially eliminate the backlog of Work.



2. Increase the number of working hours per shift, shifts per day, or Work Days per week; the amount of construction equipment; the forms for concrete work; etc., or any combination of the foregoing to substantially eliminate the backlog of Work.
 3. Reschedule Activities to achieve maximum practical concurrence of accomplishment of Activities and comply with the revised schedule.
 4. Submit to the City for review a written statement of the steps the Contractor intends to take to remove or arrest the delay to the schedule.
 5. Add to its equipment and materials or construction forces, as well as increase the working hours, if operations for critical, less critical or non-critical Activities fall behind the Contractor's Baseline Schedule at any time during the construction period.
- H. The City may, at any time during the Project and at no additional cost to the City, require the Contractor to develop a more detailed schedule/ Fragnet than depicted in the Baseline Schedule to provide a clearer understanding of the effort needed to complete an Activity or group of Activities.
- I. If the City determines that either the Critical Path is in the negative by four (4) weeks, or that the Project's date for completion may be affected, the Contractor may be required, at no additional cost to the City, to prepare a Recovery Schedule. Such Recovery Schedule is subject to review and acceptance by the City. The Recovery Schedule must propose alternative methods, overtime, and other means available to the Contractor to recover the delays incurred to date.
- J. The Contractor must submit an "As-Built Schedule", as the last schedule update showing all Activities, with the exception of punch list and closeout tasks, at Substantial Completion. This schedule must reflect the exact manner in which the Project was actually constructed.

1.14 TIME IMPACT ANALYSIS:

- A. In addition to the requirements of the Standard Construction Contract Article 11, the Contractor must submit a Time Impact Analysis to the Engineer with all requests for time extension.
- B. The Time Impact Analysis must include a written narrative and supporting impact schedule Fragnet detailing the Project delays resulting from the alleged delay. The impact schedule Fragnet, separate and distinct from the Progress Schedule update, must demonstrate that the changes or anticipated delays affect Activities of the current accepted Progress Schedule. The impact schedule will be incorporated into the Progress Schedule only after it is accepted by the Commissioner and a time extension is approved. The Fragnet submitted as part of the Time Impact Analysis must illustrate the impact of these changes or delays on the date for Substantial Completion.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 32 16.10



**SECTION 01 32 16.20
PROJECT SCHEDULES (METHOD B)**

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 16.20

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Methods
 - 2. Definitions
 - 3. Preliminary, Baseline, and Project Schedule Preparation Timeline
 - 4. Preliminary Project Schedule Development
 - 5. Project Schedule
 - 6. Activity and Calendar Coding Structure
 - 7. Work Breakdown Structure (WBS)
 - 8. Major Milestones
 - 9. Short (Three-Week) Interval/Two-Week Look-Ahead
 - 10. Submittals
 - 11. Project Schedule Updating
 - 12. Time Impact Analysis

1.3 METHODS:

- A. The Contractor must comply with Project schedule development and updating requirements as specified herein.
 - 1. The Contractor must employ or retain the services of a Construction Scheduler with verifiable construction scheduling experience, subject to review and acceptance by the City. Upon request, the Contractor must provide the City with qualifications and experience of the proposed scheduling staff member(s).
 - 2. The Contractor must prepare, update, and maintain a detailed Project Schedule using a version of scheduling software that is compatible with the City's Oracle Primavera P6 Enterprise Project Portfolio Management (EPPM). All schedule submittals must be developed using Oracle's Primavera P6 EPPM software. Schedules must be developed using accepted CPM techniques using the Precedence Diagramming Method (PDM). The Project Schedule must be developed following Defense Contract Management Agency (DCMA) and American Association of Cost Engineering International (AACE International) guidance. The Contractor will be required to use



the Contractor’s own P6 license (whether single-user or Enterprise license), unless otherwise directed by the Commissioner. If directed by the Commissioner prior to the Notice to Proceed (NTP), the Contractor must use the Department’s P6 Enterprise license and develop the Progress Schedule within the Department’s Enterprise environment.

3. Once the Baseline Schedule is accepted by the City, progress updates to the Project Schedule must be submitted monthly, unless otherwise directed by the City, until Substantial Completion. The Data Date for the schedule updates must use the last Friday of the month, or as directed by the City.
4. The Contractor will be responsible for providing the monthly schedule updates once the Baseline Schedule is approved. Each monthly schedule update must be accompanied with a schedule narrative that explains the following:
 - a) The progress of work during that particular period of performance;
 - b) Any changes in schedule Logic;
 - c) The physical conditions that were used to update every Activities Percent Complete;
 - d) Any change in actual Start and Finish Dates;
 - e) Any Duration changes;
 - f) Any added and deleted Activities; and,
 - g) Any added Extra Work (e.g., change orders).

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Activity	A representation of a discrete portion of the overall scope of Work or an event through Duration and description in a CPM schedule.
Baseline Schedule	The planned and detailed CPM schedule of Activities, including all Logic, Durations, Resource and Cost Loading, and showing the entire scope of Work. The Baseline Schedule must be accepted by the City.
Critical Path	The longest sequence of Activities in a network which establishes the minimum length of time for accomplishment of the end event of the Project.
Critical Path Method (CPM)	A management technique used to plan and control a Project which combines all relevant information into a single plan defining the sequence and Duration of operations and depicting the interrelationship of the Work elements required to complete the Project.
Current Schedule	The most recently updated schedule that captures progress to date and forecasts the dates for each Activity.
Data Date	The date used as a starting point for scheduling calculations. The Data Date is changed to the current end of period date when a schedule is updated for progress.
Duration	The amount of time, in workdays, an Activity will take to perform.



**Department of
Design and
Construction**

<u>Term</u>	<u>Definition</u>
Finish Date	The earliest estimated date an Activity is calculated to be complete, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Free Float	The calculated amount of time that the estimated start or finish of an Activity can be delayed without impacting the start or finish of other downstream Activities logically connected in a progressive relationship. (See Finish Date and Late Finish).
Fragnet	Fragmentary network: a portion of a schedule detailing impacts of an event on specific Activities in the broader schedule.
Inclement Weather	Any weather condition, the duration of which varies in excess of the 3-year average published by the National Oceanic and Atmospheric Administration (NOAA) information for the local area.
Integrated Project Schedule	The Commissioner's overall schedule covering design, procurement, and construction. The Commissioner will use the Contractor's Project Schedule to update the Integrated Project Schedule.
Late Finish	An estimate of the latest plausible date an Activity's completion can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Late Start	An estimate of the latest plausible date an Activity's start can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Logic	A direct progressive relationship between Activities where one Activity's performance restricts the performance of another Activity.
Milestone	A key or critical point in time for reference or measurement.
Network Diagram	A graphic diagram of a network schedule, showing Activities and Activity relationships.
Original Duration	The estimated amount of time, in Work Days, an Activity is expected to take to complete at the beginning of a Project as anticipated by the Contractor based on its planned means and methods at time of bid and documented in the Baseline Schedule.
Percent Complete	The percentage of the scope of Work represented by an Activity completed as of the Data Date calculated as physical percent complete for payment purposes.
Project Schedule	The Contractor's schedule used to manage the orderly and expeditious completion of the Work. The Project Schedule is initially the accepted Baseline Schedule, and is updated throughout the Project.



<u>Term</u>	<u>Definition</u>
Remaining Duration	The amount of time, in Work Days, the remaining scope of Work represented by an Activity is expected to take to complete, measured from the current Data Date.
Resource and Cost Loading	Values assigned for estimated dollars, manpower, equipment and/or materials necessary to complete the scope of Work represented by a specific Activity.
Recovery Schedule	A Recovery Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the Project within the stipulated contract Duration, plus authorized time extensions. In such case, special attention must be given to minimize delays as much as possible and must establish the nature of efforts; for instance, resources and equipment required, extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors, consultants, clients, end users and/or other concerned parties to recover the schedule.
Revised and/or Updated Schedule	A Baseline Schedule, Project Schedule, or Recovery Schedule for the Project that shows the actual Duration of all the completed Activities, including Duration of and the reasons for delays, if any have occurred, AND revisions to all remaining Activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined Activities. Any such revisions should be shown on the row just below the approved schedule of the respective Activity so that revisions can be compared. The Revised and/or updated Schedule must be reviewed and approved by the City.
Start Date	The earliest estimated date an Activity is calculated to begin, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Time Impact Analysis	A forward looking (prospective) schedule analysis used to forecast the impact to the Critical Path and to Milestone Finish Dates caused by a single event or series of events. Time Impact Analysis is not a retrospective (forensic) schedule analysis or a what-if schedule analysis of a potential event.
Total Float	The amount of time the start or finish of an Activity can be delayed without affecting the Project completion date.
Work Breakdown Structure (WBS)	WBS is a deliverable-oriented decomposition of a Project into smaller components. A WBS provides the necessary framework for detailed cost estimating and control along with providing guidance for schedule development and control.
Work Days (WD)	Work Days are every consecutive day on the calendar, excluding weekends (Saturday and Sunday) and holidays.

1.5 PRELIMINARY, BASELINE, AND PROJECT SCHEDULE PREPARATION TIMELINE:

- A. Upon receipt of the NTP, the Contractor must promptly prepare a preliminary Project Schedule and subsequently a Baseline Schedule and must submit for the City’s acceptance as follows:



1. Submit the Contractor's CPM Scheduler's qualifications to the City for approval within seven (7) Days after NTP. The City will respond to the submittal within seven (7) Days of the submittal receipt.
2. The preliminary Project Schedule must be submitted no later than twenty-one (21) Days after NTP.
3. The initial submittal of the Baseline Schedule must be provided to the City for review no later than forty-five (45) Days after NTP.
4. The Contractor must incorporate all corrections and revisions required by the City and provide an updated version of the Baseline Schedule for review and acceptance no later than seventy-five (75) Days after NTP to ensure that the Baseline Schedule is accepted no later than ninety (90) Days after the NTP. The ninety (90) Days must include fourteen (14) Days review time by the City for each submittal of the Baseline Schedule.
5. Once accepted, the Baseline Schedule will be the basis of Project Schedule updates.

B. Remedies

1. Preliminary Project Schedule: The City will take a credit of three thousand dollars (\$3,000) if the preliminary Project Schedule is not submitted within twenty-one (21) Days of the NTP.
2. Acceptable Baseline Schedule: The City will take a credit of five thousand dollars (\$5,000) if an acceptable Baseline Schedule is not submitted within ninety (90) Days of the NTP.
3. Monthly Progress Schedule updates: The City will take a credit of two thousand dollars (\$2,000) for each schedule update not submitted within the period it was due.
4. Scheduling Firm Services: If an acceptable Baseline Schedule is not provided by the Contractor within ninety (90) Days of the NTP or three (3) updates are not provided by the Contractor during the period they are due, the City may engage the services of a scheduling firm to develop a Project schedule or update an existing schedule. The total cost of such services will be deducted from the monies due to the Contractor.
 - a. Any schedules and updates developed by such scheduling firm are for the City's sole use and do not, in any way, represent an acceptance of responsibility by the City to schedule the Work or relieve the Contractor of the obligation to complete the Work within the Durations specified by the Contract.
5. The City will only accept the submitted information after all corrections have been made and all issues have been resolved. The City may find the Contractor in default if items required by this Section are incomplete.

1.6 PRELIMINARY PROJECT SCHEDULE DEVELOPMENT:

- A. The preliminary Project Schedule must be a detailed plan (division level per Construction Specifications Institute (CSI) MasterFormat) of all operations, including submittals, permitting, testing, and construction Activities, for either the first ninety (90) Days after NTP or to the point where the Contractor plans to mobilize on site (whichever is greater). This submittal will also depict a summary level (section level per CSI MasterFormat) schedule of the major Activities for the remainder of the Work.
- B. The preliminary Project Schedule will be reviewed by the City and returned with comments, as necessary, within fourteen (14) Days of submittal receipt. Information from the preliminary Project Schedule will be the general foundation for development of the Baseline Schedule.



1.7 PROJECT SCHEDULE:

- A. The Baseline Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- B. After the Baseline Schedule is approved, the Project Schedule must be the Contractor's working schedule and must be used to plan, organize, execute, and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete all of the Work.
- C. The Project Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- D. The Project Schedule must be the Contractor's working schedule used to plan, organize, execute, and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete all remaining Work.
- E. All delay claims must be based on the current approved updates of the Project Schedule.
- F. The Contractor must confirm in writing that all subcontractors performing any portion of the Work are in agreement with the accepted Baseline Schedule and the monthly updates.
- G. The amount of detail represented in the Baseline and Project Schedule and supporting documents submitted must, at a minimum, include the following items :
 - 1. Contract Milestones must be identified and included in the Baseline and Project Schedule.
 - 2. All submittal, owner review & approval, purchase, manufacture, and delivery Activities for all major materials and equipment.
 - 3. Deliveries of owner-furnished equipment and/or materials.
 - 4. Preparation, submittal, and approval of drawings, material samples, and safety plans.
 - 5. Preparation, submittal, review, and approval of permits required by all regulatory agencies and other third parties.
 - 6. Performance of tests, submission of test reports, and approval of test results.
 - 7. Commissioning Activities for all commissioned systems and equipment is to be clearly delineated and scheduled such that they will be completed prior to Substantial Completion. Such Activities must include, at a minimum, Pre-Functional testing and check sheets; Testing, Adjusting, and Balancing (TAB) verification; Functional Testing, including testing of all controls; and Owner's demonstration and orientation.
 - 8. Completion dates of all items required for phased completion (if applicable).
 - 9. Completion dates of all items required for Substantial Completion.
 - 10. Completion dates of all items required to obtain a Temporary Certificate of Occupancy (TCO) and Certificate of Occupancy (CO).
 - 11. Completion dates for close-out of regulatory and punch list items prior to Final Acceptance and transfer of the Project.
 - 12. Any additional detail requested by the Commissioner.



- H. Activities identified in the Baseline and Project Schedule must have the Duration in units of whole Work Days. Construction Activity Durations must not exceed twenty (20) work days unless specifically approved by the City. This is to ensure that Activities are not generalized and that each Activity and sub-Activity are defined as narrowly as reasonable to facilitate schedule tracking. Durations for non-construction Activities such as procurement of materials, delivery of equipment, concrete curing, etc., may exceed twenty (20) work days without prior approval; however, these are still subject to review by the City. Durations must be based on the available resources required for performing each Activity and must be the result of definitive labor hours using established production rates, and with consideration of on-site working conditions. If requested by the City, the Contractor must justify the reasonableness of a planned Duration.
- I. Activity descriptions must use plain language that clearly and uniquely define each Activity. Each description must include a verb or work function (e.g. submit, form, pour etc.) an object (e.g. slab, foundation, etc.) and, for any construction Activities, a specific location. The Work related to each Activity must be limited to one responsibility and one trade.
- J. Activity relationships must be assigned to clearly establish predecessor and successor relationships to each Activity. Open-ended Activities are not permitted with the exception of the first and last Activities in the network, the first Activity being NTP and the last being Final Acceptance. The use of relationship lag times is discouraged and only permitted with prior approval by the City. The use of negative lag is never permitted.
- K. Activity constraint dates are only to be used to reflect contractual constraints unless specifically authorized by the City.
- L. Float or slack in any schedule must not be for the exclusive use or benefit of either the City or the Contractor, but must be available for use by both the City and the Contractor.
- M. Each resubmittal after the Project Schedule is delivered for acceptance must comply with all requirements of this section. Review and response by the City will be given within fourteen (14) Days after resubmission. The Contractor's receipt of the comments within the time specified must not in any way affect the Contractor's responsibility to complete the Project within the time fixed in Schedule A.
- N. Failure by the City to return comments or indicate acceptance status will in no way relieve the Contractor's obligation to submit monthly schedule updates.
- O. At the request of the City, the Contractor must be required to make a presentation to explain or clarify the intended logical sequence of construction Activities depicted in the detailed Project Schedule. The Contractor and designated scheduler must discuss anticipated challenges and outline construction methodology and flow of work to show how and when major Milestones will be achieved. In addition, the Contractor may, at no cost to the City, be required to participate in additional Project meetings necessary to obtain acceptance of the above noted submittals.

1.8 ACTIVITY AND CALENDAR CODING STRUCTURE:

- A. The Baseline and Project Schedules must contain a sufficient number of Activities to represent adequate planning and execution of the Work so that it shows an accurate flow of work and demonstrates an understanding of the Project by the Contractor.
- B. Activity ID and Calendar Coding
 - 1. The Contractor's proposed Activity and calendar coding and must be submitted with the preliminary Project Schedule. A meeting may be requested by the City to discuss the scheme and other schedule information prior to the submittal of the Project Schedule. The accepted coding scheme and WBS Structure must be incorporated into the Project Schedule.



C. Activity ID Coding

1. All Activities/Resources/Calendars (Baseline and Project Schedules) must be coded inside the P6 Project Environment / Project Level (NOT the Global Environment/Enterprise Level) to facilitate selection, sorting and preparation of reports.
2. Activity coding must consist of the Project ID followed by a dash, followed by Activity coding (PROJECT ID-ACTIVITY CODE). Activity codes must be created at the Project level and must utilize the coding scheme outlined in the table below:

Activity Code	Meaning
RESP	<u>Responsibility</u> : Identify the party (e.g. Contractor, subcontractor, City, etc.) responsible for the Activity.
PHAS	<u>Phase</u> : Breakdown of Activities in Milestones, pre-construction, procurement, construction and close-out Activities.
LOCN	<u>Location</u> : Breakdown by floor or elevation.
AREA	<u>Area</u> : Breakdown by room, area, block or wing. May be used as a subdivision of PHAS to include Milestones, permits, subcontractor approvals, submittals, fabrication and delivery, and subdivision of the Site and buildings into Logical modules, such as by blocks, wings, etc.
TRAD	<u>Trade</u> : Breakdown by CSI Code or section number in the Specifications.

- a. Description of schedule Activities must include terminology that represents the scope of work associated with that particular Activity. Terminology used to describe similar actions must be consistent across all segments of work.
 - b. Naming convention for schedule Activities must be descriptive and indicate the associated work covered by the Activity. Activities must use a verb, noun, and location of the work in the Activity name.
3. Project Calendar Coding
- a. All calendars created and assigned to Activities must be Project-level calendars. The Calendar Name must consist of the Project ID number followed by a dash, followed by a descriptive Calendar Name (PROJECT ID-CALENDAR NAME).

1.9 WORK BREAKDOWN STRUCTURE:

- A. A multi-level hierarchal WBS must be incorporated in all P6 schedules. An initial, proposed WBS must be submitted with the preliminary Project Schedule. The levels (nodes) must include, but not be limited to:
1. LEVEL 01 – The Project Level.
 2. LEVEL 02 – Contains a minimum of four (4) nodes; Pre-Construction, Procurement, Construction or Phase of Construction, and Closeout.
 3. LEVEL 03 – Decomposition of each of the four (4) nodes in Level 02 into its constituent parts. This level must target specific, tangible, deliverable scopes of the Project Work.
- B. The Contractor's proposed WBS must be submitted with the preliminary Project Schedule. The accepted WBS must be incorporated into the Baseline and Project Schedule.



1.10 MAJOR MILESTONES:

- A. The schedule must include both contractual and non-contractual Milestones that are provided by the City. These Milestones must be properly associated with the related Work packages and maintained to represent the progress of the Project.

1.11 SHORT (THREE-WEEK) INTERVAL / TWO-WEEK LOOK-AHEAD:

- A. On a bi-weekly basis, the Contractor must provide a three (3) week short interval schedule in a format satisfactory to the City. The purpose of this schedule is to report the actual progress of the past week against the previous short interval look-ahead Activities and add any additional Activities planned for the next two (2) weeks. Electronic files and hard copies must be provided to the City on the first day of each work week with the prior week's actual progress included.
- B. Each Task listed on the short interval schedule must be representative of the most current Project Schedule Update and include a reference to an Activity shown on the current update.

1.12 SUBMITTALS:

- A. General
 - 1. Development of the Baseline Schedule and updating of the Project Schedule must follow the DCMA and AACE International guidelines.
 - 2. Each electronic submission of the Project Schedule must be assigned a unique file name consisting of the Project ID (as noted on the NTP followed by a dash followed by a unique file name clearly marked (i.e. ProjID- B000 = B/L rev0, ProjID-B001 = B/L rev01 etc.) to indicate the specific submission. Similarly, update submittals must be named ProjID-Uxxx where xxx is a sequential number, starting with 001, indicating the revision or issue number.
 - 3. The Contractor must provide all submittals in electronic format and two hard copies.
- B. Preliminary Project Schedule
 - 1. For acceptance of the preliminary Project Schedule the Contractor must submit the following:
 - a. Two (2) 11" x 17" hard copies of the proposed preliminary Project schedule, as well as the native electronic schedule data file, in .XER file format, per the direction of the City.
 - b. A Schedule Narrative Report detailing the Contractor's initial plan for executing the Contract work within the allotted Contract Duration, and include the following explanation of their provided preliminary schedule:
 - i. The proposed WBS;
 - ii. All proposed Project Calendars;
 - iii. All proposed Activity Codes, clearly defined;
 - iv. The proposed Activity ID format; and
 - v. Schedule basis narrative, which must memorialize assumptions made in the development of the schedule.
- C. Baseline Schedule
 - 1. The City will return comments within ten (10) Work Days after receipt of the initial Project Schedule Submission. If any of the required submissions are returned to the Contractor for corrections or revisions, they must be resubmitted within five (5) Work Days from receipt of



comments. Each resubmittal must comply with the requirements enumerated above. Review and response by the City will be given within ten (10) Work Days after resubmission.

2. At the request of the City, the Contractor will be required to participate in Project meetings necessary to obtain an acceptance of the above noted submittals.
3. Baseline Schedule submittal must contain a Narrative Report. It must include the following, or as directed by the City:
 - a. A description of the Project scope and how the Work is represented in the schedule Activities;
 - b. A description of the overall sequence of major components of Work;
 - c. Planned work week for each definable feature of work;
 - d. Description of the Critical Path and near Critical Paths;
 - e. Basis of Durations, described in terms of quantity and production rate;
 - f. How weather will be accommodated in the schedule, including a description of the weather calendar and the Activities it is applied to, and the NOAA Inclement Weather data that defined the number of non-Work Days;
 - g. How regulatory, operational or third-party constraints are accommodated in the schedule;
 - h. Description of key Project coordination points or events;
 - i. Discussion of long lead items and basis of time frames for submittals;
 - j. Description of anticipated means and methods for large quantity production Activities; and,
 - k. Potential opportunities and risks, including quantification of the schedule reduction or expansion.

D. Project Schedule Updates

1. Every schedule submittal must be provided with a corresponding narrative. These schedule submittals and narratives are to be submitted in hard copy, as well as in the native electronic format, as attachments to emails or other media accepted by the City. When opened, the electronic format must provide flawless restoration of the native files (P6 (.XER) for Primavera schedule files and MS Word and/or Adobe Acrobat for Narrative and supporting document submittals).
2. For each submittal of the updated Project Schedule, the following layouts, reports, and graphics are required in the specified formats, unless otherwise directed by the City:
 - a. The Contractor must furnish two (2) 11" x 17" hard copies of the complete progress schedule with each initial schedule update and final update incorporating comments furnished by the City. Additionally, the Contractor must provide the native electronic schedule data file, in .XER file format, with the initial and final schedule update submission.
 - b. An Activity bar chart layout grouped by Activity Code and then sorted by Start Date, Finish Date, and then Total Float.
 - c. Each Activity line must display the Activity ID (Act ID), Description (Name), Original Duration (OD), Remaining Duration (RD), Start Date (ES), Finish Date (EF), and Total Float (TF), Baseline Original Duration (BL OD) Baseline Start (BL Start), Baseline Finish (BL Fin), Baseline Total Float (BL TF).



- d. An Activities progress bar must show both current progress update ES and EF, and baseline ES and EF. The top line of the bar chart area must contain the updated ES and EF; the second line below must depict the accepted baseline ES and EF dates.
3. The City may request additional standard P6 reports from time to time at no additional cost.
4. The Monthly Update submittal must contain a Narrative Report. It must include the following, or as directed by the City:
 - a. Any changes to the schedule basis narrative
 - b. A discussion of progress through the update period and status of the Project with respect to completion of the schedule. The progress reporting must detail work Activities that relate to the Project's Critical Path and if these Activities are progressing as planned.
 - c. A discussion of changes, delays or other circumstances affecting Progress including identified risks and opportunities and the Contractor's strategy.
 - d. A listing and brief explanation of modifications to the previously submitted network including Logic changes and Activity additions, deletions or modifications.
 - e. An update on the status of long lead items and whether the item is on the Critical Path.
 - f. The Contractor must report on all out of sequence Activities, the cause of this deviation to plan, and the proposed resolution of this issue.
 - g. The Contractor must include an explanation of assumptions and exclusions made in developing the schedule update and narrative.
5. The Contractor must provide a copy of the computer file(s) in electronic format or other media accepted by the City. When opened, the electronic format must provide flawless restoration of the native files and an electronic copy of the Narrative Report.

1.13 PROJECT SCHEDULE UPDATING:

- A. The initial updating must take place immediately after the City accepts the Contractor's Baseline Schedule. The Data Date for the first update must not exceed seven (7) Days from the date of receipt of the accepted Baseline Schedule, or as directed by the City.
- B. Subsequent updates of the Project Schedule must be submitted monthly until Substantial Completion. The schedule data date must be the last Work Day of the period unless otherwise directed by the City. Updates must be provided to the City no later than seven (7) Days after the 'schedule Data Date'.
- C. Updates must reflect actual or reasonably anticipated progress as of the last Work Day of the period.
- D. The City may request meetings with the Contractor to review the Project Schedule and Narrative and jointly verify Project health and information.
- E. In addition, the City may request meetings with the Contractor's scheduling representative to:
 1. Resolve out-of-sequence Logic;
 2. Should out-of-sequence progress occur where Activities have reported progress without predecessor Activities being completed, the Contractor must obtain the City's approval in a Proposed Schedule before revising the Logic ties to reflect the way the Work is actually being performed. Use of progress override by default mechanisms that may be included in CPM scheduling software systems will not be allowed except on a case-by-case basis with the approval of the City. A written explanation for each instance must be included in the monthly submittal narrative.
 3. Assess the impact, if any, of any pending change orders.
 4. Incorporate accepted time extensions.



5. Review revised Logic (as-built and projected) and changes in Activity Duration, cost, and labor hours assigned.
- F. Contractor's failure to provide required scheduling information within the required timeframe or to adhere to the currently accepted schedule may result in rejection of all or a portion of the progress payment until such time as the required schedule information is submitted and accepted by the City.
- G. Delays to the Critical Path – Whenever it becomes apparent from the monthly CPM schedule update that delays to the Critical Path have occurred due to action or inaction of the Contractor and, as a result, the date for Substantial Completion will not be met, the Contractor must promptly take some or all of the following actions at no additional cost to the City, unless otherwise directed by the City:
 1. Increase construction manpower in such quantities and crafts as will substantially eliminate the backlog of Work.
 2. Increase the number of working hours per shift, shifts per day, or Work Days per week; the amount of construction equipment; the forms for concrete work; etc., or any combination of the foregoing to substantially eliminate the backlog of Work.
 3. Reschedule Activities to achieve maximum practical concurrence of accomplishment of Activities and comply with the revised schedule.
 4. Submit to the City for review a written statement of the steps the Contractor intends to take to remove or arrest the delay to the schedule.
 5. Add to its equipment and materials or construction forces, as well as increase the working hours, if operations for critical, less critical or non-critical Activities fall behind the Contractor's Baseline Schedule at any time during the construction period.
- H. The City may, at any time during the Project and at no additional cost to the City, require the Contractor to develop a more detailed schedule/ Fragnet than depicted in the Baseline Schedule to provide a clearer understanding of the effort needed to complete an Activity or group of Activities.
- I. If the City determines that either the Critical Path is in the negative by four (4) weeks, or that the Project's date for completion may be affected, the Contractor may be required, at no additional cost to the City, to prepare a Recovery Schedule. Such Recovery Schedule is subject to review and acceptance by the City.
 1. The recovery schedule must propose alternative methods, overtime, and other means available to the Contractor to recover the delays incurred to date.
 2. The Recovery Schedule must be resource-loaded with manpower and equipment required to bring the date for Substantial Completion back into compliance.
- J. The Contractor must submit an "As-Built Schedule", as the last schedule update showing all Activities, with the exception of punch list and closeout tasks, at Substantial Completion. This schedule must reflect the exact manner in which the Project was actually constructed.



1.14 TIME IMPACT ANALYSIS:

- A. In addition to the requirements of the Standard Construction Contract Article 11, the Contractor must submit a Time Impact Analysis to the Engineer with all requests for time extension.

- B. The Time Impact Analysis must include a written narrative and supporting impact schedule Fragnet detailing the Project delays resulting from the alleged delay. The impact schedule Fragnet, separate and distinct from the Progress Schedule update, must demonstrate that the changes or anticipated delays affect Activities of the current accepted Progress Schedule. The impact schedule will be incorporated into the Progress Schedule only after it is accepted by the Commissioner and a time extension is approved. The Fragnet submitted as part of the Time Impact Analysis must illustrate the impact of these changes or delays on the date for Substantial Completion.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 32 16.20



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 32 16.30
PROJECT SCHEDULES (METHOD C)**

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 16.30

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Methods
 - 2. Definitions
 - 3. Preliminary, Baseline, and Project Schedule Preparation Timeline
 - 4. Preliminary Project Schedule Development
 - 5. Project Schedule
 - 6. Activity and Calendar Coding Structure
 - 7. Work Breakdown Structure (WBS)
 - 8. Major Milestones
 - 9. Short (Three-Week) Interval/Two-Week Look-Ahead
 - 10. Submittals
 - 11. Project Schedule Updating
 - 12. Time Impact Analysis

1.3 METHODS:

- A. The Contractor must comply with Project schedule development and updating requirements as specified herein.
 - 1. The Contractor must employ or retain the services of a Construction Scheduler with verifiable construction scheduling experience, subject to review and acceptance by the City. Upon request, the Contractor must provide the City with qualifications and experience of the proposed scheduling staff member(s).
 - 2. The Contractor must prepare, update, and maintain a detailed Project Schedule using a version of scheduling software that is compatible with the City's Oracle Primavera P6 Enterprise Project Portfolio Management (EPPM). All schedule submittals must be developed using Oracle's Primavera P6 EPPM software. Schedules must be developed using accepted CPM techniques using the Precedence Diagramming Method (PDM). The Project Schedule must be developed following Defense Contract Management Agency (DCMA), and American Association of Cost Engineering International (AACE International) guidance. The Contractor will be required to use the Contractor's own P6 license (whether single-user or Enterprise



license), unless otherwise directed by the Commissioner. If directed by the Commissioner prior to the Notice to Proceed (NTP), the Contractor must use the Department’s P6 Enterprise license and develop the Progress Schedule within the Department’s Enterprise environment.

3. Once the Baseline Schedule is accepted by the City, progress updates to the Project Schedule must be submitted monthly, unless otherwise directed by the City, until Substantial Completion. The Data Date for the schedule updates must use the last Friday of the month, or as directed by the City.
4. The Contractor must be responsible for providing the monthly schedule updates once the Baseline Schedule is approved. Each monthly schedule update must be accompanied with a schedule narrative that explains the following:
 - a) The progress of work during that particular period of performance;
 - b) Any changes in schedule Logic;
 - c) The physical conditions that were used to update every Activities Percent Complete;
 - d) Any change in actual Start and Finish Dates;
 - e) Any Duration changes;
 - f) Any added and deleted Activities; and
 - g) Any added Extra Work (e.g., change orders).

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Activity	A representation of a discrete portion of the overall scope of Work or an event through Duration and description in a CPM schedule.
Baseline Schedule	The planned and detailed CPM schedule of Activities, including all Logic, Durations, Resource and Cost Loading, and showing the entire scope of Work. The Baseline Schedule must be accepted by the City.
Critical Path	The longest sequence of Activities in a network which establishes the minimum length of time for accomplishment of the end event of the Project.
Critical Path Method (CPM)	A management technique used to plan and control a project which combines all relevant information into a single plan defining the sequence and Duration of operations and depicting the interrelationship of the Work elements required to complete the Project.
Current Schedule	The most recently updated schedule that captures progress to date and forecasts the dates for each Activity.
Data Date	The date used as a starting point for scheduling calculations. The Data Date is changed to the current end of period date when a schedule is updated for progress.



<u>Term</u>	<u>Definition</u>
Duration	The amount of time, in workdays, an Activity will take to perform.
Finish Date	The earliest estimated date an Activity is calculated to be complete, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Free Float	The calculated amount of time that the estimated start or finish of an Activity can be delayed without impacting the start or finish of other downstream Activities logically connected in a progressive relationship. (See Finish Date and Late Finish).
Fragnet	Fragmentary network: a portion of a schedule detailing impacts of an event on specific Activities in the broader schedule.
Inclement Weather	Any weather condition, the duration of which varies in excess of the 3-year average published by the National Oceanic and Atmospheric Administration (NOAA) information for the local area.
Integrated Project Schedule	The Commissioner's overall schedule covering design, procurement, and construction. The Commissioner will use the Contractor's Project Schedule to update the Integrated Project Schedule.
Late Finish	An estimate of the latest plausible date an Activity's completion can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Late Start	An estimate of the latest plausible date an Activity's start can be postponed without rendering as unachievable the required completion of any downstream Milestones to which the Activity is Logically connected to in a progressive relationship.
Logic	A direct progressive relationship between Activities where one Activity's performance restricts the performance of another Activity.
Milestone	A key or critical point in time for reference or measurement.
Network Diagram	A graphic diagram of a network schedule, showing Activities and Activity relationships.
Original Duration	The estimated amount of time, in Work Days, an Activity is expected to take to complete at the beginning of a project as anticipated by the Contractor based on its planned means and methods at time of bid and documented in the Baseline Schedule.
Percent Complete	The percentage of the scope of Work represented by an Activity completed as of the Data Date calculated as physical percent complete for payment purposes.



<u>Term</u>	<u>Definition</u>
Project Schedule	The Contractor’s schedule used to manage the orderly and expeditious completion of the Work. The Project Schedule is initially the accepted Baseline Schedule, and is updated throughout the Project.
Remaining Duration	The amount of time, in Work Days, the remaining scope of Work represented by an Activity is expected to take to complete, measured from the current Data Date.
Resource and Cost Loading	Values assigned for estimated dollars, manpower, equipment and/or materials necessary to complete the scope of Work represented by a specific Activity.
Recovery Schedule	A Recovery Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the Project within the stipulated contract Duration, plus authorized time extensions. In such case, special attention must be given to minimize delays and must establish the nature of efforts; for instance, resources and equipment required, extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors, consultants, clients, end users and/or other concerned parties to recover the schedule.
Revised and/or Updated Schedule	A Baseline Schedule, or Progress Project Schedule, or Recovery Schedule for the Project that shows the actual Duration of all the completed Activities, including Duration of and the reasons for delays, if any have occurred, AND revisions to all remaining Activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined Activities. Any such revisions should be shown on the row just below the approved schedule of the respective Activity so that revisions can be compared. The Revised and/or updated Schedule must be reviewed and approved by the City.
Start Date	The earliest estimated date an Activity is calculated to begin, based on the estimated performance of all prior Activities to which the Activity is logically connected in a progressive relationship.
Time Impact Analysis	A forward looking (prospective) schedule analysis used to forecast the impact to the Critical Path and to Milestone Finish Dates caused by a single event or series of events. Time Impact Analysis is not a retrospective (forensic) schedule analysis or a what-if schedule analysis of a potential event.
Total Float	The amount of time the start or finish of an Activity can be delayed without affecting the Project completion date.



<u>Term</u>	<u>Definition</u>
Work Breakdown Structure (WBS)	WBS is a deliverable-oriented decomposition of a Project into smaller components. A WBS provides the necessary framework for detailed cost estimating and control along with providing guidance for schedule development and control.
Work Days (WD)	Work Days are every consecutive day on the calendar, excluding weekends (Saturday and Sunday) and holidays.

1.5 PRELIMINARY, BASELINE, AND PROJECT SCHEDULE PREPARATION TIMELINE:

- A. Upon receipt of the NTP, the Contractor must promptly prepare a preliminary Project Schedule and subsequently a Baseline Schedule and must submit for the City’s acceptance as follows:
 - 1. Submit the Contractor’s CPM Scheduler’s qualifications to the City for approval within seven (7) Days after NTP. The City will respond to the submittal within seven (7) Days of the submittal receipt.
 - 2. The preliminary Project Schedule must be submitted no later than twenty-one (21) Days after NTP.
 - 3. The initial submittal of the Baseline Schedule must be provided to the City for review no later than forty-five (45) Days after NTP.
 - 4. The Contractor must incorporate all corrections and revisions required by the City and provide an updated version of the Baseline Schedule for review and acceptance no later than seventy-five (75) Days after NTP to ensure that the Baseline Schedule is accepted no later than ninety (90) Days after the NTP. The ninety (90) Days must include fourteen (14) Days review time by the City for each submittal of the Baseline Schedule.
 - 5. Once accepted, the Baseline Schedule will be the basis of Project Schedule updates.
- B. Remedies
 - 1. Preliminary Project Schedule: The City will take a credit of three thousand dollars (\$3,000) if the preliminary Project Schedule is not submitted within twenty-one (21) Days of the NTP.
 - 2. Acceptable Baseline Schedule: The City will take a credit of five thousand dollars (\$5,000) if an acceptable Baseline Schedule is not submitted within ninety (90) Days of the NTP.
 - 3. Monthly Progress Schedule updates: The City will take a credit of two thousand dollars (\$2,000) for each schedule update not submitted within the period it was due.
 - 4. Scheduling Firm Services: If an acceptable Baseline Schedule is not provided by the Contractor within ninety (90) Days of the NTP or three (3) updates are not provided by the Contractor during the period they are due, the City may engage the services of a scheduling firm to develop a Project schedule or update an existing schedule. The total costs of such services will be deducted from the monies due to the Contractor.
 - 5. Any schedules and updates developed by such scheduling firm are for the City’s sole use and do not, in any way, represent an acceptance of responsibility by the City to schedule the Work or relieve the Contractor of the obligation to complete the Work within the Durations specified by the Contract.



6. The City will only accept the submitted information after all corrections have been made and all issues have been resolved. The City may find the Contractor in default if items required by this Section are incomplete.

1.6 PRELIMINARY PROJECT SCHEDULE DEVELOPMENT:

- A. The preliminary Project Schedule must be a detailed plan (division level per Construction Specifications Institute (CSI) MasterFormat) of all operations, including submittals, permitting, testing, and construction Activities, for either the first ninety (90) Days after NTP or to the point where the Contractor plans to mobilize on site (whichever is greater). This submittal will also depict a summary level (section level per CSI MasterFormat) schedule of the major Activities for the remainder of the Work.
- B. The preliminary Project Schedule will be reviewed by the City and returned with comments, as necessary, within fourteen (14) Days of submittal receipt. Information from the preliminary Project Schedule will be the general foundation for development of the Baseline Schedule.

1.7 PROJECT SCHEDULE:

- A. The Baseline Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- B. After the Baseline Schedule is approved, the Project Schedule must be the Contractor's working schedule and must be used to plan, organize, execute and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete the Work.
- C. The Project Schedule must show the sequence in which the Contractor proposes to perform the Work, and account for all major and intermediate Milestone Activities, phasing, restrictions of access, availability of work areas and the availability and use of labor, materials, and equipment.
- D. The Project Schedule must be the Contractor's working schedule used to plan, organize, execute, and track the Project. The Project Schedule is the primary vehicle used to report actual performance, progress, and convey the Contractor's execution plan to complete all remaining Work.
- E. All delay claims must be based on the current approved updates of the Project Schedule.
- F. The Contractor must confirm in writing that all subcontractors performing any portion of the Work are in agreement with the accepted Baseline Schedule and the monthly updates.
- G. The amount of detail represented in the Baseline and Project Schedule and supporting documents submitted must, at a minimum, include the following, items:
 1. Contract Milestones must be identified and included in the Baseline and Project Schedule.
 2. All submittal, owner review & approval, purchase, manufacture, and delivery Activities for all major materials and equipment.
 3. Deliveries of owner-furnished equipment and/or materials.
 4. Preparation, submittal, and approval of drawings, material samples, and safety plans.
 5. Preparation, submittal, review, and approval of permits required by all regulatory agencies and other third parties.
 6. Performance of tests, submission of test reports, and approval of test results.



7. Commissioning Activities for all commissioned systems and equipment is to be clearly delineated and scheduled such that they will be completed prior to Substantial Completion. Such Activities must include, at a minimum, Pre-Functional testing and check sheets; Testing, Adjusting, and Balancing (TAB) verification; Functional Testing, including testing of all controls; and Owner's demonstration and orientation.
 8. Completion dates of all items required for phased completion (if applicable).
 9. Completion dates of all items required for Substantial Completion.
 10. Completion dates of all items required to obtain a Temporary Certificate of Occupancy (TCO) and Certificate of Occupancy (CO).
 11. Completion dates for close-out of regulatory and punch list items prior to Final Acceptance and transfer of the Project.
 12. Any additional detail requested by the Commissioner.
- H. Activities identified in the Baseline and Project Schedule must have the Duration in units of whole Work Days. Construction Activity Durations must not exceed twenty (20) Work Days unless specifically approved by the City. This is to ensure that Activities are not generalized and that each Activity and sub-Activity are defined as narrowly as reasonable to facilitate schedule tracking. Durations for non-construction Activities such as procurement of materials, delivery of equipment, concrete curing, etc. may exceed twenty (20) Work Days without prior approval; however, these are still subject to review by the City. Durations must be based on the available resources required for performing each Activity and must be the result of definitive labor hours using established production rates, and with consideration of on-site working conditions. If requested by the City, the Contractor must justify the reasonableness of a planned Duration.
- I. Activity descriptions must use plain language that clearly and uniquely defines each Activity. Each description must include a verb or work function (e.g. submit, form, pour etc.), an object (e.g. slab, foundation, etc.) and, for any construction Activities, a specific location. The Work related to each Activity must be limited to one responsibility and one trade.
- J. Activity relationships must be assigned to clearly establish predecessor and successor relationships to each Activity. Open-ended Activities are not permitted with the exception of the first and last Activities in the network, the first Activity being NTP and the last being Final Acceptance. The use of relationship lag times is discouraged and only permitted with prior approval by the City. The use of negative lag is never permitted.
- K. Activity constraint dates are only to be used to reflect contractual constraints unless specifically authorized by the City.
- L. Float or slack, in any schedule, must not be for the exclusive use or benefit of either the City or the Contractor, but must be available for use by both the City and the Contractor.
- M. Each resubmittal after the Project Schedule is delivered for acceptance must comply with all requirements of this section. Review and response by the City will be given within fourteen (14) Days after resubmission. The Contractor's receipt of the comments within the time specified must not, in any way, affect the Contractor's responsibility to complete the Project within the time fixed in Schedule A.
- N. Failure by the City to return comments or indicate acceptance status will in no way relieve the Contractor's obligation to submit monthly schedule updates.
- O. At the request of the City, the Contractor must be required to make a presentation to explain or clarify the intended logical sequence of construction Activities depicted in the detailed Project Schedule. The Contractor and designated scheduler must discuss anticipated challenges and outline construction methodology and flow of work to show how and when major Milestones will be achieved. In addition,



the Contractor may, at no cost to the City, be required to participate in additional Project meetings necessary to obtain acceptance of the above-noted submittals.

- P. The Contractor must provide a Cost Flow Projection (CFP) summary covering from NTP to Final Acceptance. The CFP summary must match the expected billings for each period of performance.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.7.Q

- Q. Schedule Cost and Resource Loading
 1. At the direction of the City, and at no additional cost to the City, a Project Schedule must be cost loaded within thirty (30) Days after acceptance of the Baseline Schedule.
 2. The Contractor must accurately load all Project Activities with direct field labor associated with the craft or trades required to complete that Activity. All labor must be noted in manhours required to complete the tasking. The Contractor must include in all Activities the hours required of for major pieces of equipment.
 3. All Resource ID's must have a unique identifier assigned by the Contractor, and approved by the City, so the Project-specific data can be separated from other data in the system.
 4. Cost loading must be accomplished by adding a single summary level cost loaded Activity in the Project Schedule. This Activity will allow initial generation and monthly updates of the planned value that is time-phased into monthly periods.
 5. The intent of the cost loading is to facilitate cost forecasting, tracking, and reporting of monthly cost projection. Every month, the cost loaded summary Activity must be updated with earned value for prior months and revised monthly forecast for future periods. If there is a significant difference between the actual cumulative monthly invoice and the cumulative planned value from the cost loaded Project Schedule for any reporting month, the Contractor must provide the City with the reason for variance in the schedule narrative.

1.8 ACTIVITY AND CALENDAR CODING STRUCTURE:

- A. The Baseline and Project Schedules must contain a sufficient number of Activities to represent adequate planning and execution of the Work so that it shows an accurate flow of work and demonstrates an understanding of the Project by the Contractor.
- B. Activity ID and Calendar Coding
 1. The Contractor's proposed Activity and calendar coding and must be submitted with the preliminary Project Schedule. A meeting may be requested by the City to discuss the scheme and other schedule information prior to the submittal of the Project Schedule. The accepted coding scheme and WBS Structure must be incorporated into the Project Schedule.
- C. Activity ID Coding
 1. All Activities/Resources/Calendars (Baseline and Project Schedules) must be coded inside the P6 Project Environment / Project Level (NOT the Global Environment/Enterprise Level) to facilitate selection, sorting and preparation of reports.
 2. Activity coding must consist of the Project ID followed by a dash, followed by Activity coding (PROJECT ID-ACTIVITY CODE). Activity codes must be created at the Project level and must utilize the coding scheme outlined in the table below:



Activity Code	Meaning
RESP	<u>Responsibility</u> : Identify the party (e.g. Contractor, subcontractor, City, etc.) responsible for the Activity.
PHAS	<u>Phase</u> : Breakdown of Activities in Milestones, pre-construction, procurement, construction and close-out Activities.
LOCN	<u>Location</u> : Breakdown by floor or elevation.
AREA	<u>Area</u> : Breakdown by room, area, block or wing. May be used as a subdivision of PHAS to include Milestones, permits, subcontractor approvals, submittals, fabrication and delivery, and subdivision of the Site and buildings into Logical modules, such as by blocks, wings, etc.
TRAD	<u>Trade</u> : Breakdown by CSI Code or section number in the Specifications.

- a. Description of schedule Activities must include terminology that represents the scope of work associated with that particular Activity. Terminology used to describe similar actions must be consistent across all segments of work.
 - b. Naming convention for schedule Activities must be descriptive and indicate the associated work covered by the Activity. Activities must use a verb, noun, and location of the work in the Activity name.
3. Project Calendar Coding
- a. All calendars created and assigned to Activities must be Project-level calendars. The Calendar Name must consist of the Project ID number followed by a dash, followed by a descriptive Calendar Name (PROJECT ID-CALENDAR NAME).

1.9 WORK BREAKDOWN STRUCTURE:

- A. A multi-level hierarchal WBS must be incorporated in all P6 schedules. An initial, proposed WBS must be submitted with the preliminary Project Schedule. The levels (nodes) must include, but not be limited to:
 1. LEVEL 01 – The Project Level.
 2. LEVEL 02 – Contains a minimum of four (4) nodes: Pre-Construction, Procurement, Construction or Phase of Construction, and Closeout.
 3. LEVEL 03 – Decomposition of each of the four (4) nodes in Level 02 into its constituent parts. This Level must target specific, tangible, scopes of the Project Work.
 4. LEVEL 04 – Decomposition of Level 03 Activities providing work package details that provide an understanding of the process to be used to execute the Project Work.
- B. The Contractor’s proposed WBS must be submitted with the preliminary Project Schedule. The accepted WBS must be incorporated into the Baseline and Project Schedule.

1.10 MAJOR MILESTONES:

- A. The schedule must include both contractual and non-contractual Milestones that are provided by the City. These Milestones must be properly associated with the related Work and maintained to represent the progress of the Project.



1.11 SHORT (THREE-WEEK) INTERVAL / TWO-WEEK LOOK-AHEAD:

- A. On a weekly basis, the Contractor must provide a three (3) week short interval schedule in a format satisfactory to the City. The purpose of this schedule is to report the actual progress of the past week against the previous short interval look-ahead Activities and add any additional Activities planned for the next two (2) weeks. Electronic and hard copies must be provided to the City on the first day of each work week with the prior week's actual progress included.
- B. Each task listed on the short interval schedule must be representative of the most current Project Schedule Update and include a reference to an Activity shown on the current update.

1.12 SUBMITTALS:

- A. General
 - 1. Development of the Baseline Schedule and updating of the Project Schedule must follow the DCMA and AACE International guidelines.
 - 2. Each electronic submission of the Project Schedule must be assigned a unique file name consisting of the Project ID (as noted on the NTP), followed by a dash followed by a unique file name clearly marked (i.e. ProjID- B000 = B/L rev0, ProjID-B001 = B/L rev01 etc.) to indicate the specific submission. Similarly, update submittals must be named ProjID-Uxxx where xxx is a sequential number, starting with 001, indicating the revision or issue number.
 - 3. The Contractor must provide all submittals in electronic format and two hard copies.
- B. Preliminary Project Schedule
 - 1. For acceptance of the preliminary Project Schedule, the Contractor must submit the following:
 - a. Two (2) 11" x 17" hard copies of the proposed preliminary Project Schedule, as well as the native electronic schedule data file, in .XER file format, per the direction of the City.
 - b. A Schedule Narrative Report detailing the Contractor's initial plan for executing the Contract work within the allotted Contract Duration, and include the following explanation of their provided preliminary schedule:
 - i. The proposed (WBS);
 - ii. All proposed Project Calendars;
 - iii. All proposed Activity Codes, clearly defined;
 - iv. The proposed Activity ID format; and
 - v. Schedule basis narrative, which must memorialize the assumptions made in the development of the schedule.
- C. Baseline Schedule
 - 1. The City will return comments within ten (10) Work Days after receipt of the initial Project Schedule Submission. If any of the required submissions are returned to the Contractor for corrections or revisions, they must be resubmitted within five (5) Work Days from receipt of comments. Each resubmittal must comply with the requirements enumerated above. Review and response by the City will be given within ten (10) Work Days after resubmission.
 - 2. At the request of the City, the Contractor will be required to participate in Project meetings necessary to obtain an acceptance of the above noted submittals.
 - 3. Baseline Schedule submittal must contain a Narrative Report. It must include the following, or as directed by the City:



- a. A description of the Project scope and how the Work is represented in the schedule Activities;
 - b. A description of the overall sequence of major components of Work;
 - c. Planned work week for each definable feature of work.
 - d. Description of the Critical Path and near Critical Paths;
 - e. Basis of Durations, described in terms of quantity and production rate;
 - f. How weather will be accommodated in the schedule, including a description of the weather calendar and the Activities it is applied to, and the NOAA Inclement Weather data that defined the number of non-work days;
 - g. How regulatory, operational or third-party constraints are accommodated in the schedule;
 - h. Description of key Project coordination points or events;
 - i. Discussion of long lead items and basis of time frames for submittals;
 - j. Description of anticipated means and methods for large quantity production Activities;
 - k. Potential opportunities and risks, including quantification of the schedule reduction or expansion; and
 - l. Assumptions/exclusions made in the schedule.
- D. Project Schedule Updates
- 1. Every schedule submittal must be provided with a corresponding narrative. These schedule submittals and narratives must be submitted in hard copy and the native electronic format as attachments to emails or other media accepted by the City. When opened, the electronic format must provide flawless restoration of the native files (P6 (.XER) for Primavera schedule files and MS Word and/or Adobe Acrobat for narrative and supporting document submittals).
 - 2. For each submittal of the updated Project Schedule, the following layouts, reports, and graphics are required in the specified formats, unless otherwise directed by the City:
 - a. The Contractor must furnish two (2) 11" x 17" hard copies of the complete progress schedule with each initial schedule update and final update incorporating comments furnished by the City. Additionally, the Contractor must provide the native electronic schedule data file, in .XER file format with the initial and final schedule update submission.
 - b. An Activity bar chart Layout grouped by Activity Code and then sorted by Start Date, Finish Date, and Total Float.
 - c. Each Activity line must display the Activity ID (Act ID), Description (Name), Original Duration (OD), Remaining Duration (RD), Start Date (ES), Finish Date (EF), and Total Float (TF), Baseline Original Duration (BL OD), Baseline Start (BL Start), Baseline Finish (BL Fin), Baseline Total Float (BL TF).
 - d. An Activities progress bar must show both current progress update ES and EF, and baseline ES and EF. The top line of the bar chart area must contain the updated ES and EF; the second line below must depict the accepted baseline ES and EF dates.
 - 3. The City may request additional standard P6 reports from time to time at no additional cost.
 - 4. The Monthly Update submittal must contain a Narrative Report. It must include the following, or as directed by the City:



- a. Any changes to the schedule basis narrative;
- b. Overall health of the Project;
- c. Actual Activity Start Dates;
- d. Actual Activity Finish Dates;
- e. The physical conditions that were used to update Activities percent complete
- f. Percent of Work reported in place;
- g. Contract and Milestone completion date status:
 - i. Number of Days ahead or behind schedule; and
 - ii. Days lost/gained compared with the previous update.
- h. Schedule change report organized by Milestone and area comparing the number of Activities that were planned to start and finish to the number that actually started and finished for the reporting period;
- i. Lookahead report listing each Activity in the CPM schedule that is scheduled to be performed during the next reporting period;
- j. Plans for executing scheduled Activities during the next reporting period;
- k. Analysis, organized by Milestone and area, of the Critical Path and near Critical Path(s) describing:
 - i. The nature of the Critical Path/near Critical Path;
 - ii. Impact on other Activities, Milestones and Finish dates; and
 - iii. Identify, or update, risks and opportunities that may impact the Critical Path/near Critical Paths.
- l. List of current and anticipated delays by Milestone:
 - i. Cause of the delay;
 - ii. Corrective actions and schedule adjustments to correct the delay;
 - iii. Impact of the delay on other Activities, Milestones and completion dates; and
 - iv. Weather delays, when applicable. The Contractor must describe how the impacts of weather conditions and constraints were absorbed and accounted for in the schedule.
- m. Changes in Activity description, Logic, or Duration must be submitted as a separate Proposed Schedule and approved by the City prior to being submitted as an official update. Once allowed, said changes must be grouped and organized in the report in a manner that communicates in detail the rationale associated with each change and the impact upon construction sequence, relationships and the Critical Path. A standard Digger Report is not sufficient to meet this requirement;
- n. Added/deleted Activities and the rationale associated with each action;
- o. Pending issues and status of other items;
- p. Permits;
- q. Contract modifications;
- r. Current and potential extra Work, including change orders;
- s. Status of long lead procurement items and whether the item is on the Critical Path;
- t. Status of Project submittals;



- u. Out of sequence report describing the necessity of each Activity relationship shown therein, as described within this Section;
- v. Illogical progress/restraint reports (if any);
- w. Other Project or scheduling concerns;
- x. Electronic copy of the latest CPM schedule update file in Primavera (.XER) format; and
- y. Primavera scheduling error report.

1.13 PROJECT SCHEDULE UPDATING:

- A. The initial updating must take place immediately after the City accepts the Contractor's Baseline Schedule. The Data Date for the first update must not exceed seven (7) Days from the date of receipt of the accepted Baseline Schedule, or as directed by the City.
- B. Subsequent updates to the Project Schedule must be submitted monthly until Substantial Completion is achieved. The schedule Data Date must be set to the last Work Day of the period unless otherwise directed by the City. Updates must be provided to the City no later than seven (7) Days after the 'schedule Data Date'.
- C. Updates must reflect actual or reasonably anticipated progress as of the last Work Day of the period.
- D. The City may request meetings with the Contractor to review the Project Schedule and narrative and jointly verify Project health and information.
- E. In addition, the City may request meetings with the Contractor's scheduling representative to:
 - 1. Resolve out-of-sequence Logic.
 - 2. Should out-of-sequence progress occur where Activities have reported progress without predecessor Activities being completed, the Contractor must obtain the City's approval in a Proposed Schedule before revising the Logic ties to reflect the way the Work is actually being performed. Use of progress override by default mechanisms that may be included in CPM scheduling software systems will not be allowed except on a case-by-case basis with the approval of the City. A written explanation for each instance must be included in the monthly submittal narrative.
 - 3. Assess the impact, if any, of any pending change orders.
 - 4. Incorporate accepted time extensions.
 - 5. Review revised Logic (as-built and projected) and changes in Duration, cost, and labor hours assigned.
- F. Contractor's failure to provide required scheduling information within the required timeframe or to adhere to the currently accepted schedule may result in rejection of all or a portion of the progress payment until such time as the required schedule information is submitted and accepted by the City.
- G. Delays to the Critical Path – Whenever it becomes apparent from the monthly CPM schedule update that delays to the Critical Path have occurred due to action or inaction of the Contractor, and as a result the date for Substantial Completion will not be met, the Contractor must promptly take some or all of the following actions at no additional cost to the City, unless otherwise directed by the City:
 - 1. Increase construction manpower in such quantities and crafts as will substantially eliminate the backlog of Work.



2. Increase the number of working hours per shift, shifts per day, or Work Days per week; the amount of construction equipment; the forms for concrete work; etc., or any combination of the foregoing to substantially eliminate the backlog of Work.
 3. Reschedule Activities to achieve maximum resource utilization across the Project and comply with the revised schedule.
 4. Submit to the City a written statement of the steps the Contractor intends to take to remove or arrest the delay to the schedule. The Contractor must promptly provide the necessary level of effort to bring the Work back on schedule.
 5. Add to its equipment and materials or construction forces, as well as increase the working hours, if operations for critical, less critical, or non-critical Activities fall behind the Contractor's Baseline Schedule at any time during the construction period.
- H. The City may, at any time during the Project and at no additional cost to the City, require the Contractor to develop a more detailed schedule/Fragnet than depicted in the Baseline Schedule to provide a clearer understanding of the effort needed to complete an Activity or group of Activities.
- I. If the City determines that either the Critical Path is in the negative by four (4) weeks, or that the Project's date for completion may be affected, the Contractor may be required, at no additional cost to the City, to prepare a Recovery Schedule. Such Recovery Schedule is subject to review and acceptance by the City. The Recovery Schedule must propose alternative methods, overtime, and other means available to the Contractor to recover the delays incurred to date.
- J. The Contractor must submit an "As-Built Schedule", as the last schedule update showing all Activities, with the exception of punch list and closeout tasks, at Substantial Completion. This schedule must reflect the exact manner in which the Project was actually constructed.

1.14 TIME IMPACT ANALYSIS:

- A. In addition to the requirements of the Standard Construction Contract Article 11, the Contractor must submit a Time Impact Analysis to the Engineer with all requests for time extension.
- B. The Time Impact Analysis must include a written narrative and supporting impact schedule Fragnet detailing the Project delays resulting from the alleged delay. The impact schedule Fragnet, separate and distinct from the Progress Schedule update, must demonstrate that the changes or anticipated delays affect Activities of the current accepted Progress Schedule. The impact schedule will be incorporated into the Progress Schedule only after it is accepted by the Commissioner and a time extension is approved. The Fragnet submitted as part of the Time Impact Analysis must illustrate the impact of these changes or delays on the date for Substantial Completion.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 32 16.30



**SECTION 01 32 33
PHOTOGRAPHIC DOCUMENTATION**

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 33

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes the following:
 - 1. Photographic Media
 - 2. Construction Photographs
 - 3. Pre-construction Photographs
 - 4. Periodic Construction Progress Photographs
 - 5. Special Photographs
 - 6. DVD Recordings
 - 7. Final Completion Construction Photographs
- B. RELATED SECTIONS: include without limitation the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 33 00 SUBMITTAL PROCEDURES
 - 3. Section 01 35 91 HISTORIC TREATMENT PROCEDURES
 - 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 - 5. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- C. PHOTOGRAPHER - The Contractor must employ and pay for the services of a professional photographer who will take photographs showing the progress of the Work.

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" must mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SUBMITTALS:

- A. Qualification Data: For photographer.
- B. Key Plan: With each Progress Photograph Submittal include a key plan of Project site and building with notation of vantage points marked for location and direction of each image. Indicate location, elevation or story of construction. Include same label information as corresponding set of photographs.



- C. Construction Progress Photograph Prints: Take Progress Photographs bi-weekly and submit four (4) color prints of each photographic view for each trade to the Resident Engineer. Such Progress Photographs must be included in each monthly progress report or as otherwise directed by the Resident Engineer.
- D. Digital Files: Submit digital files in the format required.

1.5 QUALITY ASSURANCE:

- A. Photographer Qualifications: An individual who has been regularly engaged as a professional photographer of construction projects for not less than three (3) years.

1.6 COORDINATION:

- A. The Contractor and its subcontractor(s) must cooperate with the photographer and provide auxiliary services requested, including access to Project site and use of temporary facilities, such as temporary lighting required to produce clear and well-lit photographs without obscuring shadows.

1.7 COPYRIGHT:

- A. The Contractor must include the provisions of this Subsection 1.7 in the agreement between the Contractor and the Photographer who will provide the construction photographs described in this Section. The Contractor must submit to the Resident Engineer a copy of its agreement with the Photographer.
- B. Any photographs, images and/or other materials produced pursuant to this Agreement, and any and all drafts and/or other preliminary materials in any format related to such items produced pursuant to this Agreement, will, upon their creation, become the exclusive property of the City.
- C. Any photographs, images and/or other materials provided pursuant to this Agreement (“Copyrightable Materials”) will be considered “work-made-for-hire” within the meaning and purview of Section 101 of the United States Copyright Act, 17 U.S.C. § 101, and the City will be the copyright owner thereof and of all aspects, elements and components thereof in which copyright protection might exist. To the extent that the Copyrightable Materials do not qualify as “work-made-for-hire,” the Photographer hereby irrevocably transfers, assigns and conveys exclusive copyright ownership in and to the Copyrightable Materials to the City, free and clear of any liens, claims, or other encumbrances. The Photographer will retain no copyright or intellectual property interest in the Copyrightable Materials. The Copyrightable Materials must be used by the Photographer for no purpose other than in the performance of this Agreement without the prior written permission of the City. The Department may grant the Photographer a license to use the Copyrightable Materials on such terms as determined by the Department and set forth in the license.
- D. The Photographer acknowledges that the City may, in its sole discretion, register copyright in the Copyrightable Materials with the United States Copyright Office or any other government agency authorized to grant copyright registrations. The Photographer must fully cooperate in this effort and agrees to provide any and all documentation necessary to accomplish this.
- E. The Photographer represents and warrants that the Copyrightable Materials: (i) are wholly original material not published elsewhere (except for material that is in the public domain); (ii) do not violate any copyright Law; (iii) do not constitute defamation or invasion of the right of privacy or publicity; and (iv) are not an infringement, of any kind, of the rights of any third party. To the extent that the Copyrightable Materials incorporate any non-original material, the Photographer has obtained all necessary permissions and clearances, in writing, for the use of such non-original material under this Agreement, copies of which must be provided to the City.



PART II – PRODUCTS

2.1 PHOTOGRAPHIC MEDIA:

- A. Digital Images: Digital files must be captured as 7.2 megapixel files or greater, with a minimum pixel array of 2,400 pixels by 3,000 pixels. The camera used to capture the digital files must be a Digital SLR (Single Lens Reflex) camera or approved equal; “point and shoot” cameras or camera phones are not acceptable. Digital cameras must produce images using true optical resolution; “digital zoom” is not acceptable. Images must not be resized or interpolated. The file format for digital files must be Joint Photographic Experts Group format (“JPG”). The digital files must not be modified or processed in any way to alter the JPG file’s metadata, including the photograph’s original capture date.
- B. Digital Files: Digital files must be submitted on Digital Versatile Disk (“DVD”) or as specified by the Commissioner. DVDs must be inserted in standard weight Archival Quality clear poly sheet protectors and submitted in a hard cover three (3) ring binder. The information imprinted on each print must be provided on an Excel file included on the DVD. The DVD must be labeled with the Project ID and the Project description. Labeling using adhesive labels is not acceptable.
- C. Prints:
 - 1. Format: 8-by-10-inch (203-by-254-mm) smooth-surface matte color prints on single-weight commercial-grade stock paper, with 1-inch wide margins and punched for standard 3-ring binder.
 - 2. Identification: On the front of each photograph affix a label in the margin with Project name and date photograph was taken. On the back of each print, provide an applied label or rubber-stamped impression with the following information:
 - a. Project Contract I.D. Number.
 - b. Project Contract Name.
 - c. Name of Contractor. (and Subcontractor Trade Represented)
 - d. Subject of Image Taken.
 - e. Date and time photograph was taken if not date stamped by camera.
 - f. Description of vantage point, indicating location, direction and other pertinent information.
 - g. Unique sequential identifier.
 - h. Name and address of photographer.

PART III – EXECUTION

3.1 CONSTRUCTION PHOTOGRAPHS:

- A. General: Take photographs that provide the largest possible depth-of-field while still in focus, to clearly show the Work. Photographs with blurry or out-of-focus areas will not be accepted.
 - 1. Maintain key plan with each set of construction photographs that identifies each photographic location and direction of view.
- B. Digital Images: Submit digital images exactly as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
 - 1. Date and Time: Include date and time in filename for each image.
 - 2. Field Office Images: Maintain one set of images on USB drive, or other electronic media requested by the Commissioner, in the field office at the Project site so that it is available at all times for reference. Ensure that the images are the same as for those submitted to Commissioner.

3.2 PRE-CONSTRUCTION & PRE-DEMOLITION PHOTOGRAPHS:

- A. Before commencement of Contract Work at the Project site, take color photographs of Project site and surrounding properties, including existing structures or items to remain during construction, from different vantage points, as directed by the Resident Engineer.
 - 1. Flag applicable excavation areas and construction limits before taking construction photographs.



2. Take photographs of minimum eight (8) views to show existing conditions adjacent to property before starting the Work.
 3. Take applicable photographs of minimum eight (8) views of existing buildings either on or adjoining property to accurately record physical conditions at start of construction.
 4. Take additional photographs as required or directed by the Resident Engineer to record settlement or cracking of adjacent structures, pavements, and improvements.
- B. Demolition Operations: Take photographs as directed by the Resident Engineer of minimum of eight (8) views each before commencement of demolition operations, at mid-point of operations and at completion of operations.
- C. Pre-Demolition Photographs: Take archival quality color photographs, to include all exterior building facades, of all structures at the Project site designated to be fully demolished or removed in compliance with New York City Building Code requirements. Submit four (4) complete sets of pre-demolition photographs, in the format specified herein, to the Resident Engineer for submission to the New York City Department of Buildings.

3.3 PERIODIC CONSTRUCTION PROGRESS PHOTOGRAPHS:

- A. Take photographs of minimum eight (8) views bi-weekly as directed by the Resident Engineer of construction progress for each contract trade. Select vantage points to show status of construction and progress since last photographs were taken.

3.4 SPECIAL PHOTOGRAPHS:

- A. The photographer must take special photographs of subject matter or events as specified in other sections of the Project Specifications from vantage points specified or as otherwise directed by the Resident Engineer.
- B. Historical Elements: As required in Section 01 35 91 HISTORIC TREATMENT PROCEDURES, for Contract Work at designated landmark structures or sites, the photographer, as specified and required by individual sections of the Contract documents or at the direction of the Commissioner, must take images of existing elements scheduled to be removed for replacement, repair or replication in quantities as directed, including post-construction photographs of completed Work as directed by the Commissioner.
1. Take Presentation Quality Photographs of designated landmark structures as directed by the Commissioner for submission to the New York City Landmarks Preservation Commission. Provide a minimum of four (4) color photographic prints of each view as directed.

3.5 VIDEO RECORDING:

- A. When Video Recording of Demonstration and Orientation sessions is required, the Contractor must provide the services of a Videographer as indicated in Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

3.6 FINAL COMPLETION CONSTRUCTION PHOTOGRAPHS:

- A. For submission as Project Record Documents, take color photographs of minimum eight (8) unobstructed views of the completed Project and/or Project site, as directed by the Commissioner and after all scaffolding, hoists, shanties, field offices or other temporary work has been removed and final cleaning has been done after date of Substantial Completion. Submit four (4) sets of each view of Presentation Quality photographic prints, including negatives and/or digital images electronic file.

END OF SECTION 01 32 33



**SECTION 01 33 00
SUBMITTAL PROCEDURES**

PART I – GENERAL:

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Coordination Drawings, Catalogue Cuts, Material Samples, and other Submittals required by the Contract Documents.
- B. Review of Submittals does not relieve the Contractor of responsibility for any Contractor's errors or omissions in such Submittals, nor from responsibility for complying with the requirements of the Contract.
- C. Responsibility of the Contractor: The approval of Shop Drawings will be general and will not relieve the Contractor of the following responsibilities:
 - 1. Accuracy of such Shop Drawings;
 - 2. Proper fitting and construction of the Work
 - 3. Furnishing of materials or Work required by the Contract that may not be indicated on the Shop Drawings.
- D. Approval of Shop Drawings must not be construed as approving departures from the Contract Drawings, Supplementary Drawings, or Specifications.
- E. This Section includes the following:
 - 1. Definitions
 - 2. Submission Procedures
 - 3. Coordination Drawings
 - 4. LEED Submittals
 - 5. Ultra Low Sulfur Diesel Fuel Reporting
 - 6. Construction Photographs and Recordings
 - 7. As-Built Documents

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- E. Section 01 40 00 QUALITY REQUIREMENTS
- F. Section 01 77 00 CLOSEOUT PROCEDURES
- G. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- H. Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS
- I. Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS
- J. Section 01 81 13.10 ENVIRONMENTALLY PREFERABLE PURCHASING (EPP) COMPLIANCE



1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: “Design Consultant” must mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and Specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Action Submittals: Written and graphic information, or physical samples that require responsive actions and include, without limitation, all Shop Drawings, product data, letters of certification, tests and other information required for quality control and as required by the Contract Documents.
- D. Informational Submittals: Written and graphic information that does not require responsive action. Informational Submittals may be rejected for non-compliance with the Contract.
- E. Shop Drawings: Drawings, diagrams, illustrations, schedules, performance charts, brochures, and other data, except for coordination drawings, specifically prepared for the Project by the Contractor or any subcontractor, manufacturer, supplier or distributor, which illustrates how specific portions of the Work must be fabricated and/or installed.
- F. Coordination Drawings: As required in Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION.
- G. Product Data and Quality Assurance Submittals: Includes manufacturer’s standard catalogs, pamphlets, and other printed materials including without limitation the following:
 - 1. Catalogue and Product specifications
 - 2. Installation instructions
 - 3. Color charts
 - 4. Catalog cuts
 - 5. Rough-in diagrams and templates
 - 6. Wiring diagrams
 - 7. Performance curves
 - 8. Operational range diagrams
 - 9. Mill reports
 - 10. Design data and calculations
 - 11. Certification of compliance or conformance
 - 12. Manufacturer’s instructions and field reports

1.5 COORDINATION DRAWINGS:

- A. Coordination Drawings, General: When coordination is required to facilitate integration of products and materials fabricated or installed by more than one entity, or where limited space availability necessitates coordination, prepare Coordination Drawings according to requirements in individual Sections as a prerequisite to submittal of Shop Drawings.



1. Content: Project-specific information, shown accurately to a scale large enough to indicate and resolve conflicts. Do not base Coordination Drawings on standard printed data. Include the following information, as applicable for the Project:
 - a. Use applicable background views as a basis for preparation of coordination layouts. Prepare sections, elevations, and details as needed to describe relationship of various systems and components.
 - b. Coordinate the addition of trade-specific information by multiple contractors in a sequence that best presents the information and resolution of conflicts between installed components, before submitting for review.
 - c. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, plumbing, fire protection, and electrical systems.
 - d. Indicate space requirements for routine maintenance and for anticipated replacement of components during the life of the installation.
 - e. Show location and size of access doors required for access to concealed dampers, valves, and other controls.
 - f. Indicate required installation sequences.
 - g. Indicate dimensions shown on Drawings. Specifically note dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements. Provide alternate sketches to Commissioner indicating proposed resolution of such conflicts.

- B. Coordination Drawing Organization: Organize Coordination Drawings as follows:
 1. Floor Plans and Reflected Ceiling Plans: Show architectural and structural elements, and mechanical, plumbing, fire-protection, fire-alarm, and electrical Work. Show locations of visible ceiling-mounted devices relative to acoustical ceiling grid. Supplement plan drawings with section drawings where required to adequately represent the Work.
 2. Plenum Space: Indicate subframing for support of ceiling raised access floor and wall systems, mechanical and electrical equipment, and related Work. Locate components within plenums to accommodate layout of light fixtures and other components indicated on Drawings. Indicate areas of conflict between light fixtures and other components.
 3. Mechanical Rooms: Provide Coordination Drawings for mechanical rooms showing plans and elevations of mechanical, plumbing, fire-protection, fire-alarm, and electrical equipment.
 4. Structural Penetrations: Indicate penetrations and openings required for all disciplines.
 5. Slab Edge and Embedded Items: Indicate slab edge locations and sizes and locations of embedded items for metal fabrications, sleeves, anchor bolts, bearing plates, angles, door floor closers, slab depressions for floor finishes, curbs and housekeeping pads, and similar items.
 6. Mechanical and Plumbing Work: Show the following:
 - a. Sizes and bottom elevations of ductwork, piping, and conduit runs, including insulation, bracing, flanges, and support systems.
 - b. Dimensions of major components, such as dampers, valves, diffusers, access doors, cleanouts and electrical distribution equipment.
 - c. Fire-rated enclosures around ductwork.
 - d. HVAC equipment
 7. Electrical Work: Show the following:
 - a. Runs of vertical and horizontal conduit 1-1/4 inches (32 mm) in diameter and larger.
 - b. Light fixture, exit light, emergency battery pack, smoke detector, and other fire-alarm locations.
 - c. Panel board, switch board, switchgear, transformer, busway, generator, and motor-control center locations.
 - d. Location of pull boxes and junction boxes, dimensioned from column center lines.



- e. Indicate runs and locations of Audio Visual and Information Technology, and security devices.
- 8. Fire-Protection System: Show the following:
 - a. Locations of standpipes, mains piping, branch lines, pipe drops, and sprinkler heads.
- C. The Contractor must issue the completed Coordination Drawing(s) to the Design Consultant for his/her review. The Design Consultant may call as many meetings as necessary with the Contractor, including attendance by applicable subcontractors, and may call on the services of the applicable sub consultant(s) where necessary, to resolve any conflicts that become apparent.
- D. Upon resolution of any conflicts, the Contractor must provide a final Coordination Drawing(s) which will become the Master Coordination Drawing(s). The Master Coordination Drawing(s) must be signed and dated by the Contractor to indicate acceptance of the arrangement of the Work.
- E. A reproducible copy of the Master Coordination Drawing(s) must be provided by the Contractor to each of the appropriate subcontractor(s), the Resident Engineer and the Design Consultant for information.
- F. Shop Drawings must not be submitted prior to acceptance of the final coordinated drawings and must be prepared in accordance with the Master Coordination Drawing(s). No work will be permitted without accepted Shop Drawings. It is therefore essential that this procedure be instituted as quickly as possible.
- G. Coordination Drawing Digital Data Files: Prepare coordination digital data files according to the following requirements:
 - 1. File Preparation Format: Same digital data software program, version, and operating system as original Design Drawings.
 - 2. File Submittal Format: Submit or post coordination drawing files using PDF format.
 - 3. BIM File Incorporation: Submit or post coordination drawing files using PDF format, unless otherwise directed by Commissioner.
 - 4. Commissioner will furnish Contractor one set of digital data files of Drawings for use in preparing coordination digital data files.
 - a. Contractor must execute Digital Data File Release and indemnification form provided by Commissioner.
 - b. Commissioner makes no representations as to the accuracy or completeness of digital data files as they relate to coordination drawings.

1.6 SUBMITTAL PROCEDURES:

- A. Refer to Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS and Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS for additional Submittal requirements involving electrical and mechanical work or equipment of any nature called for in the Project.
- B. Coordination: Coordinate preparation and processing of Submittals with performance of construction activities.
 - 1. Coordinate each Submittal with fabrication, purchasing, testing, delivery, other Submittals, and related activities that require sequential activities, with the Submittal Schedule specified in Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION.
 - 2. Coordinate transmittal of different types of Submittals for related parts of the Work so processing will not be delayed because of need to review Submittals concurrently for coordination.
 - 3. The Commissioner reserves the right to withhold action on a Submittal requiring coordination with other Submittals until related Submittals are received.
- C. Identification: Place a permanent label or title block on each Submittal for identification.



1. Indicate name of firm or entity that prepared each Submittal on label or title block.
 2. Provide a space approximately 6 by 8 inches on label or beside title block to record Contractor's review and approval markings and action taken by Design Consultant.
 3. Include the following minimum information on label for processing and recording action taken:
 - a. Project name, DDC Project Number, and Contract Number
 - b. Date
 - c. Name and address of Design Consultant
 - d. Name and address of Contractor
 - e. Name and address of subcontractor
 - f. Name and address of supplier
 - g. Name of manufacturer
 - h. Submittal number or other unique identifier, including revision identifier
 - i. Number and title of appropriate Specification Section
 - j. Drawing number and detail references, as appropriate
 - k. Location(s) where product is to be installed, as appropriate
 - l. Other necessary identification
- D. PDF Submittals:
1. Prepare submittals as PDF package, incorporating complete information into each PDF file. Name PDF file with submittal number. Bind transmittal form with each submittal file package. Transmittal form must be the first page in the PDF file constituting the submittal.
 2. Submittal files received from sources other than the Contractor will be rejected without review. Re-submission of the same drawings or product data must bear the original number of the prior submission and the original titles.
- E. Web-Based Project Software Submittals: Prepare submittals as PDF files, or other format indicated by Project software website.
- F. Transmittal Form: Provide locations on form for the following information:
1. Project name, DDC Project number and Contract Number
 2. Date
 3. Destination (To:)
 4. Source (From:)
 5. Names of Contractor, subcontractor, manufacturer, and supplier
 6. Category and type of Submittal
 7. Submittal purpose and description
 8. Specification Section number and title
 9. Drawing number and detail references, as appropriate
 10. Transmittal number, numbered consecutively
 11. Submittal and transmittal distribution record
 12. Remarks
 13. Signature of transmitter
- G. Shop Drawings:
1. Procedures for Preparing, Forwarding, Checking, and Returning all Shop Drawings must be, generally, as follows:
 - a. The Contractor must make available to its subcontractors the necessary Contract Documents and must instruct such subcontractor to determine dimensions and conditions in the field, particularly in reference to coordination between the trade subcontractors. The Contractor must direct its subcontractors to prepare Shop Drawings for submission to the Design



Consultant in accordance with the requirements of these General Conditions. The Contractor must also direct its subcontractors to "Ring Up" corrections made on all re-submissions for approval, so as to be readily seen, and that the appropriate symbol per item 2 below (e.g., "GC") be used to identify the source of the correction or information that has been added.

The Contractor must:

1. Review and be responsible for information shown on its subcontractor's Shop and Installation Drawings and manufacturers' data, and conformity to Contract Documents.
 2. "Ring Up" corrections made on all submissions for approval, so as to be readily seen, and that the symbol "GC", "PL", "HVAC", or "EL" be used to indicate that the correction and/or information added was made by the Contractor and/or its subcontractor(s).
 3. Clearly designate which entity is to perform the Work when the term, "work by others" or other similar phrases are indicated on the Contract Drawings before submission to the Design Consultant.
 4. Stamp submissions "Recommended for Acceptance", date and forward to the Design Consultant.
2. The Contractor must promptly prepare and submit project specific layout detail and Shop Drawings of such parts of the Work as are indicated in the Specifications, or as required. These Shop Drawings must be made in accordance with the Contract Drawings, Specifications and Supplementary Drawings, if any. The Shop Drawings must be accurate and distinct and give all the dimensions required for the fabrication, erection, and installation of the Work.
 3. Size of Drawings: The Shop Drawings, unless otherwise directed, must be on sheets of the same size as the Contract Drawings, drawn accurately and of sufficient scale to be legible, with a one half (1/2) inch marginal space on each side and a two (2) inch marginal space for binding on the left side.
 4. Scope of Drawings: Shop Drawings must be numbered consecutively and must accurately and distinctly represent all aspects of the Work, including without limitation the following:
 - a. All working and erection dimensions
 - b. Arrangements and sectional views
 - c. Necessary details, including performance characteristics and complete information for making necessary connections with other Work
 - d. Kinds of materials including thickness and finishes
 - e. Identification of products
 - f. Fabrication and installation drawings
 - g. Roughing-in and setting diagrams
 - h. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring
 - i. Shop work manufacturing instructions
 - j. Templates and patterns
 - k. Schedules
 - l. Design calculations
 - m. Compliance with specified standards
 - n. Notation of coordination requirements
 - o. Notation of dimensions established by field measurement
 - p. Relationship to adjoining construction clearly indicated
 - q. Seal and signature of professional engineer if specified
 - r. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring
 - s. All other information necessary for the Work and/or required by the Commissioner
 5. Titles and Reference: Shop Drawings must be dated and contain:
 - a. Name of the Project, DDC Project Number, and Contract Number
 - b. The descriptive names of equipment or materials covered by the Contract Drawings and the classified item number or numbers.



- c. The locations or points and sequence at which materials, or equipment, are to be installed in the Work
 - d. Cross references to the section number, detail number, and paragraph number of the Contract Specifications
 - e. Cross references to the sheet number, detail number, etc., of the Contract Drawings
6. Field Measurements: In addition to the above requirements, the Shop Drawings must be signed by the Contractor and, if applicable, the subcontractor responsible for preparation of the Shop Drawings. Each Shop Drawing must be stamped with the following wording:

FIELD MEASUREMENTS: The Contractor certifies that it has verified and supplemented the Contract Drawings by taking all required field measurements, which said measurements correctly reflect all field conditions and that this Shop Drawing incorporates said measurements.
7. Contractor's Statement with Submittal: Any Submittal by the Contractor for acceptance, including without limitation, all dimensional drawings of equipment, blueprints, catalogues, models, samples and other data relative to the equipment, the materials, the Work or any part thereof, must be accompanied by a statement that the Submittal has been examined by the Contractor and that everything shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If there is any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, the Contractor must, in its statement, list and clearly describe each discrepancy.
8. Acceptance will be given based upon the Contractor's representation that what is shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If the Contractor's statement indicates any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, such change is subject to review and prior written acceptance by the Design Consultant. In addition, such change may require a change order in accordance with Article 25 of the Contract. In the event any such change is approved, any additional expense or increased cost in connection with the change is the sole responsibility of the Contractor.
9. Submission of Shop Drawings:
 - a. Initial Submission: The Contractor must submit seven (7) copies, or as requested by the Resident Engineer, of each Shop Drawing to the Design Consultant for his/her review and acceptance. If PDF drawings are requested by the Resident Engineer, they must be provided in an original "printed from digital" format, and not scanned. The Design Consultant will transmit Shop Drawings to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory Shop Drawing will be digitally stamped "No Exceptions Taken", be dated and transmitted by the Design Consultant as follows:
 - 1) Addressed to the Contractor, with a cc to the following:
 - a) Design Consultant's sub consultant(s) as appropriate
 - b) DDC
 - 2) Should the Shop Drawing(s) be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will transmit the Shop Drawings to the Contractor with the necessary corrections and changes to be made as indicated thereon.



- b. Revisions: The Contractor must make such corrections and changes and again transmit each shop drawing to the Design Consultant. The Contractor must revise and resubmit the Shop Drawing as required by the Design Consultant until the Shop Drawings are stamped "No Exceptions Taken". However, Shop Drawings which have been stamped "Make Corrections Noted" will be considered an "Acceptable" Shop Drawing and NEED NOT be resubmitted.
- c. Commencement of Work: No Work or fabrication called for by the Shop Drawings must be done until the acceptance of the said drawings by the Design Consultant is given. In addition to the foregoing Shop Drawing transmissions, a copy of any Shop Drawing prepared by any of the Contractor's subcontractors which Shop Drawing indicated Work related to, adjacent to, impinging upon, or affecting Work to be done by other subcontractors must be transmitted to the subcontractors so affected. [These accepted Shop Drawings must be distributed to the affected subcontractors when required with a copy of the transmittal to the Resident Engineer.]
- d. Variations: If the Shop Drawings show variations from the Contract requirements because of standard shop practice or other reasons, the Contractor must make specific mention of such variations in its letter of Submittal. Acceptance of the Shop Drawings must constitute acceptance of the subject matter thereof only and not of any structural apparatus shown or indicated.

H. Product Data:

- 1. General: Except as otherwise prescribed herein, the submission, review, and acceptance of Product Data and Catalogue cuts must conform to the procedures specified in subsection 1.6 E, Shop Drawings.
- 2. If information must be specially prepared for the Submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
- 3. Mark each copy of the Submittal to show which products and options are applicable.
- 4. Include the following information, as applicable:
 - a. Manufacturer's written recommendations.
 - b. Manufacturer's product specifications.
 - c. Manufacturer's installation instructions.
 - d. Standard color charts.
 - e. Manufacturer's catalog cuts.
 - f. Wiring diagrams showing factory-installed wiring.
 - g. Printed performance curves.
 - h. Operational range diagrams.
 - i. Mill reports.
 - j. Standard product operation and maintenance manuals.
 - k. Compliance with specified referenced standards.
 - l. Testing by recognized testing agency.
 - m. Application of testing agency labels and seals.
 - n. Notation of coordination requirements.
- 5. Submit Product Data before or concurrent with Samples.
- 6. Submission of Product Data:
 - a. Initial Submission: The Contractor must submit seven (7) sets of Product Data to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Product Data to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory catalogue cut will be digitally stamped "No Exception Taken", be dated and transmitted as follows:



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

- 1) Addressed to the Contractor, with a cc to the following:
 - a) Design Consultant's sub consultant(s) as appropriate
 - b) DDC
- 2) Should the Product Data be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return one (1) set of such Product Data to the Contractor with the necessary corrections and changes to be made indicated and one (1) set to DDC.
7. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each Product Data for the review of the Design Consultant. The Contractor must revise and resubmit the Product Data as required by the Design Consultant until the submission is stamped "No Exceptions Taken" by the Design Consultant. However, Product Data which has been stamped "Make Corrections Noted" must be considered an "Accepted" Product Data and NEED NOT be resubmitted.
- I. Samples of Materials:
 1. For samples of materials involving electrical Work of any nature, refer to Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS.
 2. Samples must be in triplicate or as directed by the Resident Engineer, and of sufficient size to show the quality, type, range of color, finish and texture of the material.
 3. Each of the samples must be labeled as follows:
 - a. Name of the Project, DDC Project Number and Contract Number
 - b. Name and quality of the material
 - c. Date
 - d. Name of Contractor, subcontractor, manufacturer and supplier
 - e. Related Specification or Contract Drawing reference to the samples submitted
 4. A letter of transmittal, in triplicate, from the Contractor requesting acceptance must accompany all such samples.
 5. Transportation charges to the Design Consultant's office must be prepaid on all samples forwarded.
 6. Samples for testing purposes must be as required in the Specifications.
 7. Samples on Display: When samples are specified to be equal to approved product, they must be carefully examined by the Contractor and by those whom the Contractor expects to employ for the furnishing of such materials.
 8. Timely Submissions Log/Schedule: Samples must be submitted in accordance with approved Shop Drawing log so as to permit proper consideration without delaying any operation under the Project. Materials should not be ordered until acceptance is received, in writing, from the Design Consultant. All materials must be furnished equal in every respect to the accepted samples.
 9. The acceptance of any samples will be given as promptly as possible, and will be only for the characteristic color, texture, strength, or other feature of the material named in such acceptance, and no other. When this acceptance is issued by the Design Consultant, it is done with the distinct understanding that the materials to be furnished will fully and completely comply with the Specifications, the determination of which may be made at some later date by a laboratory test or by other procedure. Use of materials will be permitted only so long as the quality remains equal to the approved samples and complies in every respect with the Specifications, and the colors and textures of the samples on file in the office of the Design Consultant, for the Project.



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

10. Acceptability of test Data: The Commissioner will be the final judge as to acceptability of laboratory test data and performance in service of materials submitted.
 11. Valuable Samples: Valuable samples, such as hardware, plumbing and electrical fixtures, etc., not destroyed by inspection or test, will be returned to the Contractor and may be incorporated into the Work after all questions of acceptability have been settled, providing suitable permanent records are made as to the location of the samples, their properties, etc.
- J. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
 2. Manufacturer and product name, and model number if applicable.
 3. Number and name of room or space.
 4. Location within room or space.
- K. Supplementary Qualification Data: Prepare written information that demonstrates capabilities and experience of entity. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- L. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.
- M. Certificates:
1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
 2. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
 3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
 4. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
 5. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
 6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS formats. Include names of firms and personnel certified.
- N. Test and Research Reports:
1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.



2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
 3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
 4. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
 5. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
 6. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
 - a. Name of evaluation organization.
 - b. Date of evaluation.
 - c. Time period when report is in effect.
 - d. Product and manufacturers' names.
 - e. Description of product.
 - f. Test procedures and results.
 - g. Limitations of use.
- O. Equivalent Quality: Any material, article and/or equipment which is designated in the Drawings and/or Specifications by a number in the catalogue of any manufacturer or by a manufacturer's grade or trade name is designated for the purpose of describing the material, article and/or equipment and fixing the standard of performance and/or function, as well as the quality and/or finish. Any material, article and/or equipment which is other than what is specified in the Drawings and/or Specifications will only be accepted if the Commissioner makes a written determination that such material, article and/or equipment is equivalent to that which is specified in the Drawings and/or Specifications.
- P. The submission of any material, article and/or equipment as the equal of any material, article and/or equipment set forth in the Drawings and/or Specifications as a standard must be accompanied by any and all information essential for determining whether such proposed material, article and/or equipment is equivalent to that which is specified. Such information must include, without limitation, illustrations, drawings, descriptions, catalogues, records of tests, samples, as well as information regarding the finish, durability and satisfactory use of such proposed material, article and/or equipment under similar operating conditions.
- Q. Engineering Services Submittals:
1. Performance and Design Criteria: Refer to Section 01 40 00 QUALITY REQUIREMENTS, Article 1.5.
 2. Engineering Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF file and three paper copies of certificate, signed and sealed by the responsible professional engineer, for each product and system specifically required of the Contractor to be designed or certified by a professional engineer.
 - a. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.
 3. BIM Incorporation: Incorporate engineering services drawing and data files into BIM established for



Project.

- a. Prepare engineering services documents in the required formats, including BIM incorporation.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.7

1.7 LEED SUBMITTALS:

- A. Comply with Submittal requirements specified in the following sections:
 1. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL;
 2. Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or
Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS, as applicable;
 3. Section 01 81 13.13 VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS;
 4. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS;
 5. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS; and/or,
 6. Section 01 91 15 BUILDING ENCLOSURE COMMISSIONING REQUIREMENTS.
- B. LEED Building Submittal information must be assembled into one package per each applicable Specification Section, separate from all other non-LEED Submittals. Each Submittal package must have a separate transmittal and identification as described in Subsection 1.5 herein.
- C. Number of Copies: Submit four (4) copies of LEED Submittals, in accordance with procedure described in Article 1.5 herein, unless otherwise indicated.
- D. Material Safety Data Sheets (MSDSs) for LEED Certification: Submit information necessary to show compliance with LEED certification requirements, which will be the limit of the Design Consultant's review for LEED compliance.
 1. Designated LEED Submittals that include non-LEED MSDS data will not be reviewed. The entire Submittal will be returned for re-submission.
- E. Product Cut Sheets and/or Shop Drawings for LEED Certification: Provide product cut sheets and/or shop drawings with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project. For detailed requirements refer to Subsection 1.6 of Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 PROJECTS, or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
 1. Provide the quantity, length, area, volume, weight, and/or cost of each product submitted as required to satisfy LEED documentation requirements. Refer to Subsection 1.6 of Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 PROJECTS.

1.8 ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING:

- A. In accordance with Section 01 10 00 SUMMARY, Subsection 1.10 E, the Contractor must submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel and Best Available Technology (BAT) in Non road Vehicles. Submission of such reports must be in accordance with the schedule, format, directions and procedures established by the Commissioner.



1.9 CONSTRUCTION PHOTOGRAPHS AND VIDEO RECORDINGS:

- A. Submit construction progress photographs and Video recordings in accordance with requirements of Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION.

1.10 AS-BUILT DOCUMENTS:

- A. Submit all as-built documents in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 33 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 35 03
GENERAL MECHANICAL REQUIREMENTS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 03

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. The General Mechanical Requirements contained herein must be followed by the Contractor, as well as its subcontractor for HVAC work. This Section sets forth the General Requirements applicable to mechanical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Specifications and/or the Contract Drawings, whichever requirement is the most stringent must take precedence.

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. **CONCEALED PIPING AND DUCTS:** piping and ducts hidden from sight in masonry or other construction, in floor fill, trenches, partitions, hung ceilings, furred spaces, pipe shafts and in service tunnels not used for passage. Where piping and ducts run in areas that have hung ceilings, such piping and ducts must be installed in the hung ceilings. For Work on existing piping, any insulation on such existing piping is to be tested for asbestos and abated if found to be positive by a certified asbestos contractor. Such testing and abatement must occur prior to the performance of any Work on these pipes.

1.5 SUBMITTALS:

- A. **INTENT OF MECHANICAL CONTRACT DRAWINGS –** Mechanical Contract Drawings are, in part, diagrammatic and show the general arrangement of the equipment, ducts, and piping included in the Contract and the approximate size and location of the equipment.
- B. The Contractor must follow these Contract Drawings in laying out the Work and verify the spaces in which it will be installed. The Contractor must submit, as directed, Mechanical Shop Drawings, roughing drawings,



manufacturer's Shop Drawings, field drawings, cuts, bulletins, etc., of all materials, equipment and methods of installation shown or specified in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

1. Submit sheet metal shop standards. Submit manufacturer's product data including gauges, materials, types of joints, scaling materials and installations for metal ductwork materials and products.
2. Submit scaled layout drawing (3/8"=1') of metal ductwork and fittings including, but not limited to, duct sizes, locations, elevations, slopes of horizontal runs, wall and floor penetrations and connections. Show modifications of indicated requirements made to conform to local shop practice and how those modifications ensure that free area, materials and rigidity are not reduced. Layouts should include all the room plans, mechanical equipment rooms and penthouses. Method of attachment of duct hangers to building construction all with the support details. Coordinate Shop Drawings with related trades prior to submission.
3. Indicate duct fittings, particulars such as gauges, sizes, welds and configuration prior to start of work for low-pressure systems.
4. Submit maintenance data and parts lists for metal ductwork materials and products. Include this data, product data and shop drawings in maintenance manual.

1.6 ACCESS:

- A. All Work must be installed by the Contractor to readily provide access for inspection, operation, maintenance and repair. Minor deviations from the arrangement indicated on the Contract Drawings may be made to accomplish this, but they must not be made without prior written approval by the Commissioner.

1.7 CHANGES IN PIPING, DUCTS, AND EQUIPMENT:

- A. Wherever field conditions are such that for proper execution of the Work, reasonable changes in location of piping, ducts, and equipment are necessary and required, the Contractor must make such changes as directed and approved, without extra cost to the City.

1.8 CLEANING OF PIPING, DUCTS, AND EQUIPMENT:

- A. Piping, ducts, and equipment must be thoroughly cleaned by the Contractor of all dirt, cuttings, and other foreign substances. Should any pipe, duct, or other part of the several systems be obstructed by any foreign matter, the Contractor will be required to pay for disconnecting, cleaning, and reconnecting wherever necessary for the purpose of locating and removing obstructions. The Contractor must pay for repairs to other work damaged in the course of removing obstructions. For work on existing piping, ducts, and equipment, the Contractor must pay special attention during this task so as not to disturb the insulation on such piping, ducts, or equipment.

1.9 STANDARDIZATION OF SIMILAR EQUIPMENT:

- A. Unless otherwise particularly specified, all equipment of the same kind, type, or classification, used for identical purposes, must be the product of one (1) manufacturer.

1.10 SUPPORTING STRUCTURES DESIGNED BY THE CONTRACTOR:

- A. Unless otherwise specified, supporting structures for equipment to be furnished by the Contractor must be designed by an Engineer licensed in New York State retained by the Contractor. Supporting structures must be built by the Contractor of sufficient strength to safely withstand all stresses to which they may be



subjected, within permissible deflections, and must meet the following standards:

1. Structural Steel - ASTM Standard Specifications, AISC and New York City Construction Codes.
2. Concrete for supports for equipment must conform to the Specifications for concrete herein, but in no case must be less than the requirements of the New York City Construction Codes for average concrete.
3. Steel reinforcement for concrete must be of intermediate grade and must meet the requirements of the Standard Specifications for Billet Steel-Concrete Reinforcement Bars, ASTM.
4. Drawings and calculations must be submitted for review and acceptance in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

1.11 ELIMINATION OF NOISE:

- A. All systems and/or equipment provided under the Contract must operate without objectionable noise or vibration.
- B. Should operation of any one or more of the several systems produce noise or vibration which is, in the opinion of the Commissioner, objectionable, the Contractor must, at its own expense, make changes in piping, equipment, etc., and do all work necessary to eliminate objectionable noise or vibration.
- C. Should noise or vibration that is found objectionable by the Commissioner be transmitted by any pipe or portions of the structure from systems and/or equipment installed under the Contract, the Contractor must, at its own expense, install such insulators and make such changes in or additions to the installations as may be necessary to prevent transmission of this noise or vibration.

1.12 PRELIMINARY FIELD TEST:

- A. As soon as conditions permit, the Contractor must furnish all necessary labor and materials for, and must make preliminary field tests of the equipment to ascertain compliance with the requirements of the Contract. If the preliminary field tests disclose equipment that does not comply with the Contract, the Contractor must, prior to the acceptance test, make all changes, adjustments, and replacements as required.

1.13 INSTRUCTIONS ON OPERATION:

- A. At the time the equipment is placed in permanent operation by the City, the Contractor must make all adjustments and tests required by the Commissioner to prove that such equipment is in proper and satisfactory operating condition. The Contractor must instruct the City's operating personnel on the proper maintenance and operation of the equipment for the period of time called for in the Specifications.

1.14 CERTIFICATES:

- A. On completion of the Work, the Contractor must obtain certificates of inspection, approval, and acceptance, and be in compliance with all laws from all agencies and/or entities having jurisdiction over the Work and must deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES. The Work will not be deemed substantially complete until the certificates have been delivered.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 35 03



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 35 06
GENERAL ELECTRICAL REQUIREMENTS**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section sets forth the General Requirements applicable to electrical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Project Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, must take precedence.
- B. This Section includes the following:
 - 1. Related Sections
 - 2. Definitions
 - 3. Procedure for Electrical Approval
 - 4. Submittals
 - 5. Electrical Installation Procedures
 - 6. Electrical Conduit System Including Boxes (Pull, Junction and Outlet)
 - 7. Electrical Wiring Devices
 - 8. Electrical Conductors and Terminations
 - 9. Circuit Protective Devices
 - 10. Distribution Centers
 - 11. Motors
 - 12. Motor Control Equipment

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. **WIRING:** contains wire and raceway (rigid steel, heavy wall conduit unless specifically indicated otherwise).
- B. **POWER WIRING:** wiring from a panel board or other specified source to a starter (if required), then to a disconnect (if required), then to the final point of usage such as a motor, unit, or device.



- C. CONTROL and/or INTERLOCK WIRING: wiring that signals the device to operate or shut down in response to a signal from a remote control device such as a temperature, smoke, pressure, float, etc. device (starters and disconnect switches are not included in this definition) regardless of the voltage required for the controlling device.
- D. RIGID STEEL CONDUIT: rigid steel heavy wall conduit that is hot-dip galvanized inside and outside. The conduit must meet the requirements of the latest edition, as amended, of the "Standard for Rigid Steel Conduit" of the Underwriters' Laboratories, Inc. Unless otherwise specified in the Specifications or indicated on the Contract Drawings, rigid steel conduit must be used for all exposed work, all underground conduits in contact with earth, and fire alarms systems, as required by the New York City Construction Codes.
- E. ELECTRICAL METALLIC TUBING (EMT): industry standard thin wall conduit of galvanized steel. All elbows, bends, couplings and similar fittings which are installed as a part of the conduit system must be compatible for use with electric metallic tubing. Couplings and terminating fittings must be of the pressure type as approved by the Commissioner. Set screw fittings will not be acceptable. EMT must meet the requirements of the latest edition, as amended, of the "Standard for Electrical Metallic Tubing" of the Underwriters Laboratories Inc. EMT may only be used where specifically indicated. In no case will EMT be permitted in spaces other than hung ceilings and dry wall partitions.
- F. FLEXIBLE METALLIC CONDUIT (FMC): a conduit made through the coiling of a self-interlocking ribbed strip of aluminum or steel, forming a hollow tube through which wires can be pulled. For final connections to motors and motorized equipment, not more than a 4' - 0" length of flexible conduit may be used. For watertight installations, this conduit must be of a watertight type, attached with watertight glands or fittings for final connections from outlet box to recessed lighting fixtures and in locations only where specifically permitted by the Specifications or Contract Drawings.

1.5 PROCEDURE FOR ELECTRICAL APPROVAL:

This Section sets forth General Electrical information, as well as required approvals for all electrical work required for the Project, including ancillary electrical work which may be included in the work of other trade subcontractors.

- A. ELECTRIC SERVICE: The electric service supply is subject to commercial and operating variation of the utility company. Proper provision must be made to have all apparatus operate normally under these conditions.
- B. ACCEPTANCE: Acceptance and approval of the Work will be contingent upon the inspection and test of the installation by the City regulatory agency.
- C. TESTS: The Contractor must notify the Commissioner when the Contractor has completed the work and is ready to have it inspected and tested. Upon completion of the Work, tests must be made as required by the Commissioner of all electrical materials, electrical and associated mechanical equipment, and of appliances installed hereunder. The Contractor must furnish all labor and material for such tests. Should the tests show that any of the material, appliances or workmanship is not first class or not in compliance with the Contract, on written notice the Contractor must remove and promptly replace the materials to be in conformity with the Contract.
- D. CERTIFICATE OF THE BUREAU OF ELECTRICAL CONTROL, OF THE DEPARTMENT OF BUILDINGS (B.E.C.): Prior to requesting a substantial completion inspection, the Contractor must file a Certificate of Inspection issued by B.E.C. On completion of the Work, the Contractor must obtain certificates of inspection, approval, acceptance and compliance from all agencies and/or entities having jurisdiction over the work and must deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES.



E. RESPONSIBILITY FOR CARE AND PROTECTION OF EQUIPMENT:

1. The Contractor furnishing any equipment must be responsible for the equipment until it has been inspected, tested and accepted, in accordance with the requirements of the Contract.
2. After delivery, before and after installation, the Contractor must protect all equipment against theft, injury or damage from all causes. The Contractor must carefully store all equipment received for work which is not immediately installed. If any equipment has been subject to possible injury by water, it must be thoroughly dried out and put through a special dielectric test as directed by the Commissioner, at the expense of the Contractor or replaced by the Contractor without additional cost to the City.

- F. UNIFORMITY OF EQUIPMENT:** Any two (2) or more pieces of equipment, apparatus or materials of the same kind, type, or classification, which are intended to be used for identical types of service, must be made by the same manufacturer.

1.6 SUBMITTALS:

A. CONTRACTOR'S ELECTRICAL DRAWINGS AND SAMPLES FOR APPROVAL:

1. The Contractor must submit to the Commissioner for approval, in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, complete dimensional drawings of all equipment, wiring diagrams, motor test data, details of control, installation layouts showing all details and locations and including all schedules, and descriptions and supplementary data to comprise complete working drawings and instructions for the performance of the Work. A description of the operation of the equipment and controls must be included. A letter, in triplicate, must accompany each submittal.
2. The Contractor must submit in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, duplicate samples of such materials and appliances as may be requested by the Commissioner for approval. These samples must be properly tagged for identification and submitted for examination and test. After the samples are approved, one (1) sample will be returned to the Contractor and the other sample will be filed in the office of the Commissioner's representative for inspection use. After the Contract is completed, the second set of samples will be returned to the Contractor.

- B. TIMELINESS:** All material must be submitted in accordance with the Submittal Schedule in sufficient time for the progress of construction. Failure to promptly submit acceptable samples and dimensional drawings of equipment will not be accepted as grounds for an extension of time. The Commissioner may decline to consider submittals unless all related items are submitted at the same time.

- C. CONTRACTOR'S STATEMENT WITH SUBMITTALS:** Contractor must submit a statement in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.

- D. BULLETINS AND INSTRUCTIONS:** The Contractor must furnish and deliver to the Commissioner in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS and Section 01 77 00 CLOSEOUT PROCEDURES, after acceptance of the work, four (4) complete sets of instructions, technical bulletins and any other printed matter (diagrams, prints, or drawings) required to provide complete information for the proper operation, maintenance and repair of the equipment and the ordering of spare parts.



PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 ELECTRICAL INSTALLATION PROCEDURES:

This Sub-Section sets forth the General Installation Procedure that must apply to all electrical work and electrical equipment appearing in the Contract.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

- A. **INTENT OF CONTRACT DOCUMENTS:** The Drawings and Specifications are to be interpreted as a means of conveying the scope and intent of the work without giving every minor electrical detail. It is intended, nevertheless, that the Contractor must provide whatever labor and materials are found necessary, within the scope of the Contract, for the successful operation of the installation. Specific details of individual installations are to be finally decided upon when the Contractor submits Working or Shop Drawings for approval to DDC. Whenever there are two (2) or more methods to complete Project work within the Contract scope, the Commissioner reserves the right to choose that method which, in the Commissioner's opinion, will afford the most satisfactory performance, lasting qualities, and access for repairs, even if this selection is the costliest.
- B. **SCHEMATIC PLANS – APPROXIMATE LOCATIONS:** Conduits and wiring are shown on the plans for diagrammatic purposes only. Therefore, conduit layouts may not necessarily give the actual physical route of the conduits. The Contractor who installs a conduit system will also be required, as part of the work, to furnish and install all hangers and pull-boxes, including any special pull-boxes found necessary to overcome interferences, and to facilitate the pulling of electrical cables. Similarly, the locations of equipment, appliances, outlets and other items shown on Contract Drawings are only approximate and are to be definitively established when equipment Shop Drawings are submitted and approved by DDC during construction.
- C. **SLEEVES:** required for conduits passing through walls or floors; must be furnished and set by the Contractor installing the conduits. Sleeves in waterproofed floors must be provided with flashing extending twelve (12) inches in all directions from sleeve and secured to waterproofing. Flashing must be turned down into space between pipe and sleeve and caulked watertight. Flashing must be twenty (20) ounces cold rolled copper. Sleeves must be supplied with welded flanges similar to those supplied by the subcontractor for Plumbing Work and must extend one (1) inch above finished floor.
- D. **COORDINATION:** The Contractor must keep in close touch with the construction progress and promptly obtain the necessary information for the accurate placement of its work well before Project construction operations obstruct its work. The Contractor is to consult all other Contract Drawings, as well as approved equipment Shop Drawings on file in the Resident Engineer's Field Office. This will aid in avoiding interferences, omissions, and errors in the electrical installation.
- E. **RESTORATION:** If drilling or cutting is done on finished surfaces of equipment or the structure, any marring of the surface must be repaired or replaced by the Contractor. The Contractor must be held responsible for corrective restoration due to its cutting or drilling, and for any damage to the Project or its contents caused by the Contractor or the Contractor's workers. If any piercing of waterproofing occurs because of the installation of the work, the Contractor must restore the waterproofing, at its own expense, to the satisfaction of the Commissioner.
- F. **ELECTRICAL WORK AT SITE:** The Contractor furnishing equipment consisting of a number of related electrical devices or appliances, mounted in a single enclosure, or on a common base, must furnish this unit, ready for connection and operation, complete with internal wiring, connections, terminal boxes with



copper connectors and/or lugs and ample electrical leads. The cost of any wiring, re-wiring, or other work required to be done on this unit in the field, must be borne by the Contractor, without additional cost to the City.

- G. **COOPERATION AMONG SUBCONTRACTORS:** Whenever an electrically operated unit or system involves the combined work of several subcontractors for its installation and successful operation, the Contractor must require each subcontractor to exercise the utmost diligence in cooperating with others to produce a complete, harmonious installation.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 ELECTRICAL CONDUIT SYSTEM INCLUDING BOXES (PULL, JUNCTION AND OUTLET):

This Sub-Section sets forth the requirements applying to the installation of electrical conduits, boxes or fittings. Rigid steel conduit must be used throughout, unless otherwise directed by the Commissioner. Where the word 'conduit' is used without a modifier such as, rigid steel, EMT, etc., must be interpreted to mean rigid steel, heavy wall, threaded conduit.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

A. **INSTALLATIONS AND APPLICATIONS:**

1. Unless otherwise specified or indicated on the Contract Drawings, conduit runs must be installed concealed in finished spaces.
2. **CONDUIT SIZES:** The sizes of conduits must be as indicated on the Contract Drawings. Wherever conduit sizes are not indicated, the conduit must meet the requirements of the New York City Electrical Code to accommodate the conductors to be installed therein.
3. Conduits must be reamed smooth after cutting. No running threads will be permitted. Universal type couplings must be used where required. Conduit joints must be screwed up to butt. Empty conduits after installation must have all open ends temporarily plugged to prevent the entrance of water or other foreign matter.
4. Conduits installed in concrete or masonry must be securely held in place during pouring and construction operations. A group of conduits terminating together must be held in place by a template.
5. **UNDERGROUND STEEL CONDUITS:** Unless otherwise specified, all underground steel conduits in contact with earth must be encased by the Contractor who installs them, in a covering of not less than two (2) inches of an approved concrete mixture. Concrete mix must be one (1) part cement to four and one-half (4 ½) parts of fine and coarse aggregate.
6. **EXCAVATION RESTORATION PERMITS:** When installing underground conduits, duct banks or manholes, the Contractor must perform the work of cutting pavement, excavation shoring, keeping trenches or holes pumped dry, backfilling, restoration of surfaces to original condition and removal of excess earth and rubbish from premises. During the work, the Contractor must provide adequate crossovers, protective barriers, lamps, flags, etc., to safeguard traffic and the public. When the work is in a public highway or street, the Contractor must secure and pay for all necessary permits, inspection fees, and the cost of repaving.
7. **EXPOSED CONDUIT SUPPORTS:** Exposed conduits must be supported by Galvanized hangers with necessary inserts, beam clamps of approved design, or attached to walls or ceilings by expansion bolts. Exposed conduits must be supported or fastened at intervals not more than five (5) feet.



8. Exposed conduits must be installed parallel or at right angles to ceilings, walls and partitions. Where direction changes of exposed conduit cannot be made with neat bends, as may be required around beams or columns, conduit-type fittings must be used.
9. Conduit must be installed with an expansion joint approved by the Commissioner in the following conditions:
 - a. Wherever the conduit crosses a building expansion joint, the Contractor will be held responsible for determining where the building expansion joints are located.
 - b. Every 200 feet, when in straight runs of 200 feet or longer.
10. Conduits may only enter and leave a floating slab in a vertical direction, and only in an approved manner. Horizontal entries into floating slabs are not permitted.
11. Conduits installed in pipe shafts must be properly supported to carry the total weight of the raceway system complete with cable. In addition, at least one (1) horizontal brace per 10 ft. section must be provided to assure stability of the raceway system.
12. BUSHINGS AND LOCKNUTS: Approved bushings and locknuts must be used wherever conduits enter outlet boxes, switch boxes, pull boxes, panel board cabinets, etc.
13. CONDUIT BENDS: must be made without kinking conduit or appreciably reducing the internal diameter. All bends in conduits of two (2) inch in diameter or larger must be made with a hydraulic or power pipe bender. The radius of the inner edge of any bend must not be less than six (6) times the internal diameter of the conduit where rubber covered conductors are to be installed, and not less than ten (10) times the internal diameter of the conduit where lead covered conductors are to be used. Long gradual sweeps will be required, rather than sharp bends, when changes of direction are necessary.
14. EMPTY CONDUITS
 - a. TESTS: All conduits and ducts required to be installed and left empty must be tested for clear bore and correct installation by the Contractor using a ball mandrel and a brush and snake before the installation will be accepted. The ball must be turned to approximately 85% of the internal diameter of the raceway to be tested. Two (2) short wire brushes must be included in the mandrel assembly. Snaking of conduits, ducts, etc., must be performed by the Contractor in the presence of the Resident Engineer. Any conduits or ducts which reject the mandrel must be cleared at once with the Contractor bearing all costs, such as chopping concrete, to replace the defective conduit and restore the surface to its original condition.
 - b. TAGS: Numbers or letters must be assigned to the various conduit runs, and as they test clear they must be identified by a fiber tag not less than 1-¼ inch width, attached by means of a nylon cord. All conduit terminations in panel, splice or pull boxes, as well as those out of the floor or ceiling, must be tagged.
 - c. TEST RECORDS: As the conduit runs clear, a record must be kept under the heading of "Empty Conduit Tested, Left Clear, Tagged and Capped" showing conduit designation, diameter, location, date tested and by whom. When complete, this record must be signed by the Resident Engineer and submitted in triplicate for approval. This record must be entered on the Contract Record Drawings under Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 - d. CAPPING: After test, all empty conduit and duct openings, must be capped or plugged by the Contractor as directed.
 - e. DRAG LINES: A drag line must be left in all empty conduit.



B. BOXES:

1. The Contractor must furnish and erect all pull boxes indicated on the plans or where required. Sides, top and bottom of pull boxes must be Galvanized coated and must be built of No. 12 USSG steel reinforced at corners by substantial angle irons and riveted or welded to plates. Bottom or side of pull boxes must be removable and held in place by corrosion resistant machine screws. Pull boxes in damp locations must have threaded hubs and gaskets and be NEMA 4X. All pull boxes must be suspended from ceiling or walls in the most substantial manner.
2. In centering outlets, the Contractor is cautioned to allow for overhead pipes, ducts and other obstructions, and for variations in arrangement and thickness of fireproofing, soundproofing and plastering. Precaution should be exercised regarding the location of window and door trims, paneling, etc. Mistakes resulting from failure to exercise precaution must be corrected by the Contractor at no additional cost to the City. Outlets in hung ceilings must be supported from the black iron or structure.
3. The exact location of all outlets in finished rooms must be as directed by the Commissioner. When the interior finish has been applied, the Contractor must make any necessary adjustment of its work to properly center the outlets. All outlet boxes for local switches near doors must be located at the strike side of doors as finally hung, whether so indicated on the drawings or not.
4. Exposed wall outlet boxes must be securely anchored, erected neatly and tight against the walls.
5. All wall outlets of each type must be set accurately at the same level on each floor, except where otherwise specified or directed by the Commissioner. Where special conditions occur, outlets must be located as directed.
6. MOUNTING HEIGHTS: The following heights are standard heights and are subject to correction due to coordination with Contract Drawings. All such changes must be approved by the Resident Engineer. Heights given are from finished floor to center line of outlet or device on wall or partition, unless otherwise indicated.

a.	General Convenience Outlets (mount vertical)	1'-6"
b.	Clock Outlets	8'-6" or 1'-6" below ceiling
c.	Wall Lighting Switches	4'-0"
d.	Motor Controllers	5'-0"
e.	Motor Push-button	4'-2"
f.	Telephone Outlets	As Directed by the Commissioner
g.	Fire Alarm Bells	8'-6" or 1'-6" below ceiling
h.	Fire Alarm Stations	4'-0"
i.	Intercom Outlet	1'-6"
j.	Cooking and Refrigerator Unit	As Directed
7. Outlet boxes must be of a design and construction approved by the Commissioner. The type of box, including its form and dimensions, must be appropriate for: its specific location; the kind of fixture to be used; and, the conduits (both quantity and type) that will connect to it. All ferrous outlet boxes must meet the requirements for zinc coating as specified under Electrical Conduit Systems.
8. Knockouts will only be opened to insert conduit. Any outlet boxes with more openings than are necessary for conduit insertion must be sealed by the Contractor without additional charge.
9. All outlet boxes and junction boxes for exposed work must be galvanized cast iron or cast aluminum with threaded openings. Outlet boxes for exposed inside work in damp locations must be galvanized cast iron or cast aluminum with threaded hubs and neoprene gaskets.
10. Junction boxes must not be less than 4 11/16" square and must be equipped with zinc coated plates. Where plates are exposed they must be finished to match the room decor.



11. **FIXTURE SUPPORTS:** Outlet boxes supporting lighting fixtures must be equipped with fixture studs held by approved galvanized stove bolts or integral with the box. Cast iron or malleable boxes must have four (4) tapped holes for mounting required cover or fixtures.
12. Outlet boxes exposed to the weather or indicated W.P. must be cast iron or cast aluminum with the covers made watertight with neoprene gaskets. The boxes must have external lugs for mounting. Drilling of the body of the fitting for mounting will not be permitted. The cover screws must be appropriate in size, non-corrodible and not less than four (4) in number for each box opening.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 ELECTRICAL WIRING DEVICES:

- A. **WALL SWITCHES:** must be of the best specification grade, quiet type, and must have a rating of 20 Amperes at 277 volts, as manufactured by Bryant, Hubbell or approved equal. The mechanism must be equipped with arc snuffers. They must be of the tumbler type, single pole. Switches of the 3-way type must have a similar rating.
- B. **RECEPTACLES:**
 1. **CONVENIENCE OUTLETS:** must be of the best specification grade, duplex, two-pole, 3-wire, 20 Amperes at 125 volts. It must have a grounding pole that must be grounded to the conduit system. Receptacles must be capable of both back and side wiring and must have only one (1) grounding screw. Receptacles must be Hubbell Catalog #5262 or approved equal.
 2. **HEAVY DUTY RECEPTACLE OUTLETS:** must have the Ampere rating and the number of poles specified on the Contract Drawings and must be Hubbell, Russell-Stoll, Bryant, AH & H or approved equal. Each outlet must have a grounding pole, which must be grounded to the conduit system.
 3. **FLOOR RECEPTACLES:** must be Russell & Stoll #3040 or approved equal, to fit into floor box previously specified.
 4. **NAMEPLATES:** are required for all receptacles other than 120V.
- C. **CLOCK HANGERS:** Clock outlets for surface type clocks must be equipped with a supporting hook and recessed faceplate to conceal the electrical cord.
- D. **WATERTIGHT DEVICES:** For installations exposed to weather or in damp locations, the devices must be in a gasketed, cast iron enclosure.
- E. **PLATES:**
 1. Every convenience outlet and switch outlet must be covered by means of a stainless steel No. 302 - 0.4" antimagnetic plate with an approved finish, unless provided otherwise in the detailed Specifications.
 2. Where two (2) or three (3) switches are grouped together, a single faceplate must be used. Where more than three (3) switches are located at one (1) point, the faceplates may be made up in multiple units.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 ELECTRICAL CONDUCTORS AND TERMINATIONS:

- A. **CONDUCTORS FOR LIGHT AND POWER:** All wire and cable must be of annealed copper of 98% conductivity. Aluminum wire or cable will not be permitted. The insulation must be flame retardant, moisture and heat resistant, thermoplastic, type THW or THWN rated for 600 volts at 75 degrees Celsius (C.) for both wet and dry locations. Wires No. 8 or larger must be stranded. Wires and cables must also



be subject to the requirements of the NYCEC. Cables for incoming service, or wire in conduits contiguous with the earth, in concrete, or other damp or wet locations, must be synthetic rubber insulated with neoprene jacket, heat and moisture resistant and must be equal to UL Type USE and rated for 600 volts at 75 degrees C. for both wet and dry locations.

- B. **FIXTURE WIRE:** Lighting fixtures must be wired with No. 14 gauge wire designated as AWM and rated at 105 degrees C.
- C. **OTHER TYPES:** Cables and wires for interior communication systems are described in applicable detailed Specifications.
- D. **MINIMUM SIZE:** Conductors smaller than No. 12 AWG must not be used for light or power.
- E. **COLOR CODE:** Wires must have a phase color code, and multiple conductor cables must be color coded.
- F. **CABLE DATA:** The Contractor must submit for approval the following information for each size and type of cable to be furnished:
 - 1. Manufacture of Cable - Location of Plant.
 - 2. Minimum insulation resistance at standard test temperature.
 - 3. Days required for delivery to site of work after order to proceed with manufacture.
- G. **ORIGINAL REELS:** Cable and wire must be delivered to the site of the work on original sealed factory reels.
- H. **WIRE INSTALLATION:**
 - 1. **INSTALL WIRES AFTER PLASTERING:** Feeder and branch circuits wiring must not be installed into conduit before the rough plastering work is completed. No conductors must be pulled into floor conduits before floor is poured.
 - 2. **CONDUIT SECURED IN PLACE:** No conductor must be pulled into any conduit run before all joints are made up tightly and the entire run rigidly secured in place.
 - 3. **WIRE ENDS:** All wires must be left with sufficiently long ends for proper connection and stowing.
 - 4. **PULLING COMPOUNDS:** to ease the pulling-in of wires into the conduit, only approved compounds as recommended by cable manufacturers must be used.
 - 5. **PRESSURE CONNECTORS:** pressure connectors for wires must be of the cast copper or forged copper pressure plate type. Connectors must be O.Z., Burndy, National Electric Products or approved equal.
 - 6. Splices and feeder taps in the gutters of panel boxes must be made by means of pressure plate-type connectors encased in composition covers as manufactured by O.Z., Burndy, National Electric Products or approved equal.
 - 7. Splices in branch wiring for sound systems and fire systems, must be first made mechanically secure, then soldered and taped.
 - 8. In lieu of soldered splices (except for sound and fire systems, which must have soldered splices) the following alternates are acceptable for operating temperatures up to 105 degrees C., for fluorescent fixtures and for the splicing of branch circuit wiring up to No. 8 AWG wire:
 - a. Mechanical splices made with mechanical connectors as manufactured by the Minnesota Manufacturing Company "Scotchlock" or approved equal. Mechanical connectors requiring a special tool (pressure connectors, insulators and locking rings) by Buchanan or approved equal. The tool used for connector application must be as approved by the connector manufacturer.



- b. For branch circuit wire and cable No. 6 AWG and larger, the seamless tubular connector will only be accepted. Application of this connector must be with a tool recommended by the connector manufacturer.
- 9. TAGS: All feeders and risers must be tagged at both ends, and in all pull and junction boxes and gutter spaces through which they pass. Such tags must be of fiber and have the feeder designation and size stamped thereon.
- 10. BRANCH CIRCUIT WIRING:
 - a. The Contractor installing branch circuit wiring must test the work for correct connections and leave all loop splices in the fixture outlet boxes properly spliced and taped. The Contractor must provide wire ends long enough for convenient connection to device.
 - b. NEUTRALS: No common neutrals must be used except for lighting branch circuits. Each neutral wire must be terminated separately on a neutral busbar in the panelboard. No common neutrals will be permitted for convenience receptacle branch circuits.
- I. TERMINATIONS
 - 1. LUGS: All lugs for all devices and all cable terminations must be copper. AL/CU rated lugs will not be permitted. The only exception to this requirement is when the particular device is not manufactured with copper lugs by any manufacturer. Lugs for No. 6 AWG cable and larger must be cast copper or forged copper pressure plate type. Lugs for 1/0 and larger must be fastened with two (2) bolts.
 - 2. All lugs must be of the proper size to accept the cable connected to them. Any subcontractor furnishing a device containing lugs is to coordinate with the Contractor to ensure that the device terminations are adequate for the wire or cable (whose size may be larger than expected due to voltage drop considerations) connected to the device.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 CIRCUIT PROTECTIVE DEVICES:

This Section sets forth the circuit protective devices such as circuit breakers and safety switches, used in connection with Motor Control Equipment, Distribution Centers, Panel boards and Service Entrance.

- A. CIRCUIT BREAKERS:
 - 1. CIRCUIT BREAKERS: must be operable in any position and must be of the quick-make, quick-break type on manual operation. The handle must be trip free, preventing contacts from being held in closed position against abnormal overloads or short circuits. Positive visual indication of automatic tripped position of breaker must be provided, in addition to the "On" and "Off" indication. All circuit breakers must be of the bolted type.
 - 2. TRIP RATING: Circuit breakers must be provided with the required number of trip elements, calibrated at 40 degrees C., ambient temperature, in accordance with wire sizes or motor currents as shown on Contract Drawings or indicated in the Specifications.
 - 3. POLE BARRIER: Multipole pole breakers must be designed to break all poles simultaneously. They must be provided with barriers between poles and arc suppressing devices.
 - 4. ELEMENTS: Multipole circuit breakers must have frames of not less than a 100 Ampere rating. Multipole circuit breakers for 480 volts AC operation must have an NEMA interrupting rating of 18,000 Amperes, unless a higher rating is specified in the Specifications or indicated on the Contract Drawings.
 - 5. For circuit breakers with frame size up to and including 225 Amperes, the breakers may be



provided with non-interchangeable trip elements. For frame ratings above 225 Amperes, the breakers must be provided with interchangeable trip elements, which can be replaced readily.

6. Single pole circuit breakers for branch circuits must have a frame size of no less than 100 Amperes, and must be rated at 125 volt A.C. with a NEMA interrupting rating of 10,000 Amperes, unless a higher rating is specified in the Specifications or indicated on the Contract Drawings.
7. INVERSE TIME ACTION: The circuit breakers must be dual element type, one (1) element with time limit characteristics, so that tripping will be prevented on momentary overloads, but will occur before dangerous values are reached and the other with instantaneous trip action. Inverse time delay action must be effective between a minimum tripping point of 125% of rating of breaker and an instantaneous tripping point between 600% and 700% of rated current.
8. CONSTANCY OF CALIBRATION: The tripping elements must insure constant calibration and be capable of withstanding excessive short circuit conditions without injury.
9. CONTACTS: must be non-welding under operating conditions and of the silver to silver type.
10. TEMPERATURE RISE: Current carrying parts, except thermal elements, must not rise in temperature in excess of 30 degrees C. while carrying current at the part's rated current and frequency.
11. NUMBERING: Each circuit breaker must be distinctly numbered when installed in a group with other breakers. The calibration of trip element must be indicated on each breaker.

B. SAFETY SWITCHES:

NEMA TYPE HD: When safety switches are permitted to be used for service entrance, motor disconnecting means or to control other types of electrical equipment, they must be of the type HD of a rating not less than 30 Amperes. Enclosures must be provided with means for locking. For ratings above 60 Amperes terminals must have double studs.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.6

3.6 DISTRIBUTION CENTERS:

This Section sets forth the construction and installation procedure for Switchboards, Panel boards and Cabinets.

- A. PANEL BOARDS, GENERAL TYPE: The panel boards must be of the automatic circuit breaker type with individual breakers for each circuit, removable without disturbing the other units. Circuit breakers must be in accordance with the requirements outlined under Section 3.5, "Circuit Protective Devices."
- B. NUMBER AND RATING OF CIRCUIT BREAKERS: The Contract Drawings show a layout of each panel, giving the number, frame, size and trip setting of circuit breakers and number of branch circuits and spare breakers. Each branch circuit must be distinctly numbered.
- C. BUS BAR CONSTRUCTION AND SUPPORT: Panel Boards must be of the dead front type and must have bus bars and branch circuits designed to suit the system and voltage. Current carrying parts, exclusive of circuit breakers, must be copper and based on a maximum density of 1,000 Amperes per square inch. Bus bars for the main switchboard must be designed for the frame rating of the Service Breaker. Bus bars must run up the center of the panel, unless otherwise indicated, and must have connected thereto the various branch circuits. Unless otherwise specified, bus bars for each panel board must be equipped with main lugs only and capacity as required on Contract Drawings. Where main protection is required, automatic circuit breakers must be used. A neutral bus of at least the same capacity as a live bus bar must be provided for the connection of all neutral conductors. Each terminal must be identified. All current carrying parts, exclusive of circuit breakers, must be of copper with a minimum number of joints. The bus bar structure must be a self-supporting unit, firmly fastened to a ½



- inch plastic board, extending the full length and width of assembly which must serve to insulate the bus structure from the back of panel box. Other methods affording equally effective bus structure support and insulation will be given consideration. An insulating barrier must separate neutral bus from other parts of panel.
- D. **CIRCUIT BREAKER ASSEMBLY:** The entire circuit breaker and bus bar assembly must be mounted on an adjustable metal base or pan and secured to the back of the panel box. The panel must have edges flanged for rigidity.
- E. **PANEL MOUNTING:** The panel must be centered in the panel box, line up with the door openings, be set level and plumb, and no live parts may be exposed with the door open.
- F. **PANEL CABINET:**
1. **PANEL CABINET INSTALLATION:** When installed, surface mounted in panel closets must be mounted on Kindorf channel.
 2. Where cabinets cannot be set entirely flush due to masonry walls or partitions or where cabinet is extra deep, the protruding sides of cabinet must be trimmed with a metal or hardwood return molding of approved design and fastened to cabinet so as to conceal the intersection between the wall and cabinet.
- G. **NAMEPLATES:** Where required, nameplates must be made of engraved Lamicoide sheet, or approved equal. Letters and numbers must be engraved white on a black background (except for Firehouse projects which must have white letters on a red background). The Contractor must submit an engraved sample for approval as to design and style of lettering before proceeding with the manufacture of the nameplate. Nameplates must be of suitable size and must also be provided at the top of the switchboard or section thereof and on the trim at the top of all lighting and power panels. Similar nameplates must also be provided for each distribution circuit breaker giving the breaker number, the number of the feeder, and the name of the equipment fed.
- H. **SHOP DRAWINGS:** showing all details of boxes, panels, etc., must be submitted for approval.
- I. **DIRECTORIES:** A directory must be fastened with brass screws and consist of a noncorrosive metal frame with dimensions not less than five (5) inches x eight (8) inches and a transparent window of Plasticile, Plexiglass, Lucite, Polycarbonate or approved equal that is not less than 1/16 inch thick over cardboard or heavy paper. The directory must be typewritten and show the number and name of each circuit, and lighting or equipment supplied. The size of riser feeder must be as indicated on the directory. The dimensions of the directory must be submitted for approval for each size of panel.
- J. **CONSTRUCTION**
1. **FINISH:** Panel boxes, doors and trim for installation in dry locations, must be zinc coated after fabrication by the hot-dip galvanizing or electroplate process on inside and outside surfaces. In damp locations, panel boards must be enclosed and gasketed NEMA 3R type. Panel boards located outdoors or exposed to the weather must be NEMA 3X type.
 2. **PAINTING:** Panel boxes, doors and trim must receive a coat of approved priming paint and a second coat of approved paint in the field after installation. Paint must be applied to the inside and outside of boxes and on both sides of trim. Panel trims and doors must receive a third or finishing coat on the outside after installation. Approval as to texture and color must be obtained before the final coat is applied.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.7

3.7 MOTORS:

This Section sets forth the general design, construction and performance requirements, which must apply to all motors furnished in the Contract.

- A. **MOTOR DESIGN:** All motors must be designed to comply with the New York State Energy Conservation Construction Code and the New York City Energy Conservation Code. In the event of any conflict or inconsistency between such codes, the New York City Energy Conservation Code must prevail. Motors must have standard NEMA frames and must have nameplate ratings adequate to meet the specified conditions of operation. Motor performance under variable conditions of voltage and frequency must be within the limits set in NEMA standards, unless modified in the Specifications. Motors must be expressly designed for the hazard duty load, voltage and frequency as specified in the Contract. All motor windings must be copper. All motors intended to operate on a 208 volt system must be designed and rated for 200 volts.
- B. **STANDARDS OF COMPARISON:** In the absence of specific motor specifications, in general, the best standard products of the leading motor manufacturers must be considered as a standard for comparison. The requirements of the NEMA standards for motors and generators must be deemed to contain the minimum requirements of performance and design.
- C. **OBJECTIONABLE NOISES:** Objectionable noises will not be tolerated and exceptionally quiet motors may be required for certain specified locations. Noise control tests as per the New York City Construction Codes may be performed as directed by the Commissioner. Such motors must bear a nameplate lettered "Quiet Motor." Springs and slip rings must be of approved non-ferrous material.
- D. **BEARINGS:**
 - 1. Bearings, unless specified otherwise, must be of the ball or roller type. Motors one (1) horsepower and larger that are equipped with ball roller bearings must also have lubrication of the pressure-relief greasing type. The Contractor furnishing four (4) or more such motors must also furnish, as part of the Contract, a pressure grease gun of rugged design, of approximately ten (10) ounce capacity, complete with necessary adapters. The Contractor must also provide ten (10) pounds of approved gun grease.
 - 2. For any particular unit where sleeve bearings are deemed desirable, permission for their use may be granted by the Commissioner. Motors one (1) horsepower and larger that are equipped with sleeve type bearings must, in addition to having protected fittings easily accessed for oiling, be provided with visible means for determining normal oil level. Lubrication must be positive, automatic and continuous.
- E. **MOTOR TERMINALS AND BOXES:** Each motor must be furnished with flexible leads of sufficient length to extend for a distance of not less than three (3) inches beyond the face of the conduit terminal box. This box must be furnished of ample size to make and house motor connections. These requirements must be met irrespective of any other standards or practices. Size of cable terminals and conduit terminal box holes must be subject to approval. For motors five (5) horsepower or larger, each terminal must come with two (2) cast or forged copper pressure type connectors with bolts, nuts and washers. For motors of smaller ratings, connectors of other acceptable types may be furnished. For installations exposed to the weather or moist locations, terminal boxes must be of cast iron with threaded hubs and gasketed covers. Cover screws must be of non-corrosive material.
- F. **MOTOR TEMPERATURE RISES:** The motor nameplate temperature rises for the various types of motor enclosures must be as listed below:

1. Open Frame	40 degrees C.
2. Totally enclosed and enclosed fan cooled	55 degrees C.
3. Explosion proof and submersible	55 degrees C.



4. Partially enclosed and drip proof 40 degrees C.

The temperature of the various parts of a motor must meet the requirements of NEMA standards for the size and type of the motors. Tests for heating must be made by loading the motor to its rated horsepower and keeping it so loaded for the rated time interval or until the temperature becomes constant.

- G. SPECIAL CODE INSTALLATIONS: Electrical installations covered by special publications of NBFU and by special City rulings and regulations must comply in design and safety features with such applicable codes, regulations and rulings, and must be furnished and installed complete with all accessories and safety devices as therein specified.
- H. MOTORS ON LIGHTING PANELS: The largest A.C. motor permitted on branch circuits of lighting panels must not exceed 1/4 horsepower.
- I. MOTORS RATED: ½ horsepower and larger must be polyphase.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8

3.8 MOTOR CONTROL EQUIPMENT:

This Section sets forth the requirements for motor controllers and associated devices. Such requirements are applicable to all motor control equipment furnished or installed.

- A. MANUFACTURER: All control equipment furnished under the Contract must be the product of a single manufacturer. Exceptions to this rule may be granted in the case of controllers for fractional horsepower motors driving special equipment, the various units of which have been engineered to obtain specific performance.
- B. CONTROL ITEMS REQUIRED: The Contractor furnishing motors must also furnish therewith complete disconnecting, starting and control equipment as required by the detailed Specifications, the various code authorities and for the successful operation of the driven equipment. These items include circuit breakers, magnetic starters with overload protection and low voltage release or protection, push button stations, pilot lights and alarms, float, pressure, temperature and limit switches, load transfer switches, devices for manual operation and speed controllers, etc. The Contractor must furnish as many of these items as required for the successful operation of the driven unit.
1. Where a motor is to be located out of sight of the controller, the Contractor must furnish an approved disconnecting means to be mounted near motor.
- C. TYPES OF STARTERS:
1. SQUIRREL CAGE: A.C. motors of the squirrel cage type, rated from one (1) to thirty (30) horsepower, must have magnetic across the line starters; motors rated above thirty (30) horsepower must be furnished with reduced voltage (autotransformer type) starter or part winding start with time delay to reduce inrush current. Size of starters must be based on 200V operation.
2. SLIP RING: A.C. motors of the slip-ring type must be furnished with primary across the line starters interlocked with secondary starting and regulating equipment. The interlocking feature must prevent starting of the motor when the secondary controller is off the initial starting point.
3. MAGNETIC: For fractional horsepower motors, magnetic type starters are not required unless the particular method of controlling the driven equipment makes them necessary. Where individual single phase fractional horsepower motors or the sum of fractional horsepower motors controlled by an automatic device are ½ horsepower or more, magnetic starters and circuit breakers must be used. Single phase A.C. motors smaller than ½ horsepower or three-phase A.C. motors smaller than one (1) horsepower where manual control is specified may be furnished with starters of toggle switch or push button type with inbuilt thermal protection. No additional disconnecting means is required to be furnished with this type of starter. This type of starter may also be used in series



with automatic control devices such as thermostats, float and pressure switches, provided the individual motor or the sum of fractional horsepower motors is less than ½ horsepower. Means for manual operation must be provided.

- D. **DISCONNECTING BREAKER:** All motor starters, unless otherwise specified, must be provided with a disconnecting means in the form of a circuit breaker of the type specified under Article 3.5 CIRCUIT PROTECTIVE DEVICES. This disconnecting means must be contained in the same housing with the starter and must be operable from outside. Means must be provided for locking the handle of the circuit breaker in the "OFF" position if it is desired to take the equipment out of service and prevent unauthorized starting.
- E. **CONTROL CABINET – DRY LOCATIONS:** All starters must be furnished with general purpose, NEMA Type 1, sheet metal enclosures with hinged covers and baked enamel finish.
- F. **CONTROL CABINET – WATERTIGHT:** In wet locations, cast iron watertight enclosures with threaded hubs, galvanized and gasketed hinged covers must be provided.
- G. **PANELS:** Motor control devices and appliances must be mounted on approved insulating slabs with all wiring and connections made on the back of the slabs.
- H. **WIRING AND TERMINALS:** Wiring connections for currents of one hundred (100) Amperes or less may be made with copper wire or cable with special flameproof insulating coverings. Such wires must be installed in a neat workmanlike manner, flat against the slab, and held in place by clips. Connections must be made with pressure connectors for No. 8 AWG and larger wires, and with grommets for small stranded wires. Except for incoming and outgoing main leads, all connections must terminate on approved connector blocks, which may be installed on the face of the slab. For small, across the line starters, the above requirements may be modified if satisfactory connections are provided.
- I. **COPPER BUS:** For currents exceeding one hundred (100) Amperes, copper bus must be used in place of wires. The bus must be constructed of copper rods, tubing or flat strap, bent and shaped properly and securely attached to the slab in a neat and workmanlike manner. The cross section of copper must provide sufficient areas to keep current density at not more than one thousand (1,000) Amperes per square inch.
- J. **COOPERATION:** The Contractor's subcontractor(s) who furnish electrically operated equipment must give to the Contractor and the Contractor's electrical subcontractor full information relative to sizes and locations of apparatus furnished by them which require electrical connections.

END OF SECTION 01 35 06



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 35 26
SAFETY REQUIREMENTS PROCEDURES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The Contractor shall comply with the requirements of “*The City of New York Department of Design and Construction Safety Requirements*”. This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Safety and Health Requirements, including:
 - 1. Definitions
 - 2. Required Safety Meeting
 - 3. Compliance with Regulations
 - 4. Submittals
 - 5. Personnel Protective Equipment
 - 6. Hazardous and / or Contaminated Materials
 - 7. Emergency Suspension of Work
 - 8. Protection of Personnel
 - 9. Environmental Protection

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: “Design Consultant” must mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 REQUIRED SAFETY MEETINGS:

- A. Prior to commencing construction, the Resident Engineer will schedule and hold a preconstruction kick-off meeting either at DDC’s main office or at the Project site with representatives of the Contractor, including the principal on-site project representative, one or more safety representatives, the Commissioner’s designated representatives and other concerned parties for the purpose of reviewing the Contract safety requirements. Additionally, implementing Work safety provisions must be discussed.
- B. The Contractor is responsible for conducting weekly documented jobsite safety meetings, given to all jobsite personnel including all subcontractors on the Project, with the purpose of discussing safety topics and job-specific requirements at the DDC worksite.



1.5 COMPLIANCE WITH REGULATIONS:

- A. The Work, including contact with or handling of hazardous materials, disturbance or dismantling of structures containing hazardous materials, and disposal of hazardous materials, shall comply with the applicable requirement for 29 CFR Parts 1910 and 1926, and 40 CFR, Parts 61, 261, 761 and 763.
- B. Work involving disturbance or dismantling of asbestos or asbestos-containing materials, demolition of structures containing asbestos and removal of asbestos, shall comply with 40 CFR Part 61, Subparts A and M, and 40 CFR Part 763, as applicable.
- C. Additionally, Work shall comply with all applicable federal, state, and local safety and health regulations.
- D. In case of a conflict between applicable regulations, the more stringent requirements shall apply.
- E. All workers working on the DDC Project site are required by NYC Local Law 41 to complete the OSHA 10-hour training course.

1.6 SUBMITTALS:

- A. The Contractor shall submit to the Resident Engineer, copies of the Safety Program, Site Safety Plan and other required documentation in accordance with the “*New York City Department of Design and Construction Safety Requirements*”.
- B. Permits: If hazardous materials are disposed of off-site, the Contractor must submit to the Resident Engineer copies of shipping manifests, permits from applicable federal, state, or local authorities and disposal facilities, and certificates that the material has been disposed of in accordance with regulations.
- C. Accident Reporting: Submit a copy of each accident report to the Resident Engineer in accordance with the “*New York City Department of Design and Construction Safety Requirements*”.
- D. All asbestos and lead project regulatory notifications are to be submitted to DDC’s Office of Environmental and HazMat Services (OEHS) through the Resident Engineer.
- E. Request for Subcontractor Approval: Any subcontractor performing environmental work must submit required documentation for approval to perform such work as required by DDC’s OEHS.

PART II – PRODUCTS

2.1 PERSONNEL PROTECTIVE EQUIPMENT:

- A. Special facilities, devices, equipment, and similar items used by the Contractor in execution of the Work shall comply with 29 CFR Part 1910, subpart I, Part 1926, subpart E, and other applicable regulations.

2.2 HAZARDOUS AND / OR CONTAMINATED MATERIALS:

- A. The Contractor shall bring to the attention of the Commissioner, any material encountered during execution of the Work that the Contractor suspects to be hazardous and / or contaminated.
- B. The Commissioner shall determine whether the Contractor shall perform tests to determine if the material is hazardous and / or contaminated. A change to the Contract price may be provided, subject to the applicable provisions of the Contract.
- C. If the material is found to be hazardous, the Commissioner may direct the Contractor to remediate the hazard and a change to the Contract price may be provided, subject to the applicable provisions of the Contract.



PART III – EXECUTION

3.1 EMERGENCY SUSPENSION OF WORK:

- A. When the Contractor is notified by the Commissioner of noncompliance with the safety provisions of the Contract, the Contractor shall immediately, unless otherwise instructed, correct the unsafe condition, at no additional cost to the City.
- B. If the Contractor fails to comply promptly, all or part of the Work may be stopped by notice from the Commissioner.
- C. When, in the opinion of the Commissioner, the Contractor has taken satisfactory corrective action, the Commissioner shall provide written notice to the Contractor that the Work may resume.
- D. The Contractor shall not be allowed any extension of time or compensation for damages in connection with a work stoppage for an unsafe condition.

3.2 PROTECTION OF PERSONNEL:

- A. The Contractor shall take all necessary precautions to prevent injury to the public, occupants, or damage to property of others. The public and occupants includes all persons not employed by the Contractor or a subcontractor.
- B. Whenever practical, the work area shall be fenced, barricaded, or otherwise blocked off from the public or occupants to prevent unauthorized entry into the work area, in compliance with the requirements of Section 01 50 00 TEMPORARY FACILITIES, SERVICES AND CONTROLS, and including without limitation, the following:
 - 1. Provide traffic barricades and traffic control signage where construction activities occur in vehicular areas.
 - 2. Corridors, aisles, stairways, doors, and exit ways shall not be obstructed or used in a manner to encroach upon routes of ingress or egress utilized by the public or occupants, or to present an unsafe condition to the public or occupants.
 - 3. Store, position and use equipment, tools, materials, scraps and trash in a manner that does not present a hazard to the public or occupant by accidental shifting, ignition, or other hazardous activity.
 - 4. Store and transport refuse and debris in a manner to prevent unsafe and unhealthy conditions for the public and occupants. Cover refuse containers and remove refuse on a frequent regular basis acceptable to the Resident Engineer. Use tarpaulins or other means to prevent loose transported materials from dropping from trucks or other vehicles.

3.3 ENVIRONMENTAL PROTECTION:

- A. Dispose of solid, liquid and gaseous contaminants in accordance with local codes, laws, ordinances and regulations.
- B. Comply with applicable federal, state, and local noise control laws, ordinances, and regulations, including but not limited to 29 CFR 1910.95, 29 CFR 1926.52 and NYC Administrative Code Chapter 28 of Title 15.

END OF SECTION 01 35 26



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 35 91
HISTORIC TREATMENT PROCEDURES**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 91

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for the treatment of Landmark Structures and Landmark Quality Structures, as identified in the Addendum. Specific requirements are indicated in other sections of the Specifications.
- B. This Section includes, without limitation, the following:
 - 1. Storage and protection of existing historic materials
 - 2. General Protection
 - 3. Protection during use of heat-generating equipment
 - 4. Photographic Documentation
 - 5. NYC Landmarks Preservation Commission Final Approval signoffs

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- C. Section 01 33 00 SUBMITTAL PROCEDURES
- D. Section 01 77 00 CLOSEOUT PROCEDURES
- E. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" means the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Landmark Structure or Site: Any building or site which has been designated as a landmark, or any building or site within a landmark district, as designated by the New York City (NYC) Preservation Commission or the New York State Historic Preservation Office.
- D. Landmark Quality Structure: Any building which has been determined by the City to be of landmark quality and/or historical significance.



- E. Preservation: To apply measures necessary to sustain the existing form, integrity, and materials of a historic property. Work may include preliminary measures to protect and stabilize the property.
- F. Rehabilitation: To make possible a compatible use for a property through repair, alterations, and additions while preserving those portions or features that convey its historical, cultural, or architectural values.
- G. Restoration: To accurately depict the form, features, and character of a property as it appeared at a particular period of time by means of the removal of features from other periods in its history and the reconstruction of missing features from the restoration period.
- H. Reconstruction: To reproduce in the exact form and detail a building, structure, or artifact as it appeared at a specific period in time.
- I. Stabilize: To apply measures designed to reestablish a weather-resistant enclosure and the structural reinforcement of an item or portion of the building while maintaining the essential form as it exists at present.
- J. Protect and Maintain: To remove deteriorating corrosion, reapply protective coatings, and install protective measures such as temporary guards; to provide the least degree of intervention.
- K. Repair: To stabilize, consolidate, or conserve; to retain existing materials and features while employing as little new material as possible. Repair includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials. Within restoration, repair also includes limited replacement in kind, rehabilitation, and reconstruction, with compatible substitute materials for deteriorated or missing parts of features when there are surviving prototypes.
- L. Replace: To duplicate and replace entire features with new material in kind. Replacement includes the following conditions:
 - 1. Duplication: Includes replacing elements damaged beyond repair or missing. Original material is indicated as the pattern for creating new duplicated elements.
 - 2. Replacement with New Materials: Includes replacement with new material when original material is not available as patterns for creating new duplicated elements.
 - 3. Replacement with Substitute Materials: Includes replacement with compatible substitute materials. Substitute materials are not allowed, unless otherwise indicated.
- M. Remove: To detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- N. Remove and Salvage: To detach items from existing construction and deliver them to the City ready for reuse.
- O. Remove and Reinstall: To detach items from existing construction, repair and clean them for reuse, and reinstall them where indicated.
- P. Existing to Remain or Retain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed and salvaged, or removed and reinstalled.
- Q. Material in Kind: Material that matches existing materials as much as possible, in species, cut, color, grain, and finish.

1.5 SUBMITTALS:

- A. Historic Treatment Program: Submit a written plan for each phase or process, including protection of surrounding materials during operations. Describe in detail materials, methods, and equipment to be used for each phase of the Work.
- B. Alternative Methods and Materials: If alternative methods and materials to those indicated are proposed for any phase of the Work, submit for the Commissioner's approval a written description, including



evidence of successful use on other comparable projects and provide a program of planned testing to demonstrate the effectiveness of the alternative methods and materials for use on this Project.

- C. Qualification Data: Submit qualification data for historic treatment specialists as specified and required by individual sections of the Project specifications.
- D. Photographs for Designated Landmark Structures: Submit photographs in accordance with Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION and as described in this section.
- E. Record Documents: Include modifications to manufacturer's written instructions and procedures, as documented in the historic treatment preconstruction conference and as the Work progresses.

1.6 QUALITY ASSURANCE:

- A. Historic Treatment Specialist Qualifications: Refer to Section 01 40 00 QUALITY REQUIREMENTS for Qualifications for Historic Treatment Specialists.
- B. Historic Treatment Preconstruction Conference: The Resident Engineer will schedule and hold a preconstruction meeting at the site in accordance with Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION.
 - 1. Review manufacturer's written instructions for precautions and effects of products and procedures on building materials, components, and vegetation.
 - a. Record procedures established as a result of the review and distribute to affected parties.

1.7 STORAGE AND PROTECTION OF HISTORIC MATERIALS:

- A. Removed and Salvaged Historic Materials: As specified and required by individual sections of the Project specifications.
- B. Removed and Reinstalled Historic Materials: As specified and required by individual sections of the Project specifications.
- C. Existing Historic Materials to Remain: Protect construction indicated to remain against damage and soiling during historic treatment. When permitted by the Commissioner, items may be removed to a suitable, protected storage location during historic treatment and reinstalled in their original locations after historic treatment operations are complete.
- D. Storage and Protection: When removed from their existing location, store historic materials, at a location acceptable to the Commissioner, within a weather tight enclosure where they are protected from wetting by rain, snow, or ground water, and temperature variations. Secure stored materials to protect from theft.
 - 1. Identify removed items with an inconspicuous mark indicating their original location.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 GENERAL PROTECTION:

- A. Comply with manufacturer's written precautions against harmful effects of products and procedures on adjacent building materials, components, and vegetation.
- B. Ensure that supervisory personnel are present when work begins and throughout its progress.
- C. Temporary Protection of Historic Materials during Construction:
 - 1. Protect existing materials during installation of temporary protections and construction. Do not deface or remove existing materials.



2. Attachments of temporary protection to existing construction must be approved by the Commissioner prior to installation.
- D. Protect landscape work adjacent to or within work areas as follows:
1. Provide barriers to protect tree trunks.
 2. Bind spreading shrubs.
 3. Use coverings that allow plants to breathe and remove coverings at the end of each day. Do not cover plant material with a waterproof membrane for more than eight (8) hours at a time.
 4. Set scaffolding and ladder legs away from plants.
- E. Existing Drains: Prior to the start of work or any cleaning operations, test drains and other water removal systems to ensure that drains and systems are functioning properly. Notify the Commissioner immediately of drains or systems that are stopped or blocked. Do not begin Work pertaining to this Section until the drains are in working order.
1. Provide a method to prevent solids, including stone or mortar residue, from entering the drains or drain lines. Clean out drains and drain lines that become blocked or filled by sand or any other solids because of the Work performed under this Contract.
 2. Protect storm drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.

3.2 PROTECTION DURING USE OF HEAT-GENERATING EQUIPMENT:

- A. No roofing work requiring the use of an open flame will be permitted on any Landmark Structure or any Landmark Quality Structure whose roof or wall structure is made of wood or primarily of wood.
- B. Comply with the following procedures while performing work with heat-generating equipment, including welding, cutting, soldering, brazing, paint removal with heat, and other operations where open flames or implements utilizing heat are used:
1. Obtain Commissioner's approval for operations involving use of open-flame or welding equipment. Notification must be given for each occurrence and location of work with heat-generating equipment.
 2. Where possible, use heat-generating equipment in shop areas or outside the building.
 3. Before work with heat-generating equipment commences, furnish personnel to serve as a fire watch (or watches) for location(s) where work is to be performed.
 4. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
 5. Remove and keep the area free of combustibles, including rubbish, paper, waste, etc., within the area of operations.
 6. If combustible material cannot be removed, provide fireproof blankets to cover such materials.
 7. Where possible, furnish and use baffles of metal or gypsum board to prevent the spraying of sparks or hot slag into surrounding combustible material.
 8. Prevent the extension of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
 9. Inspect each location of the day's work not sooner than thirty (30) minutes after completion of operations to detect hidden or smoldering fires and to ensure that proper housekeeping is maintained.



- C. Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to automatic sprinkler heads, shield the individual heads temporarily with guards.

3.3 PHOTOGRAPHIC DOCUMENTATION:

- A. Photographs for Designated Landmark Structures: Show existing conditions prior to any historic treatments, including one overall photograph and two close-up photographs of all areas of work affected. Show one overall photograph and two close-up photographs of all areas of work after the successful execution of all historical treatments.

3.4 NEW YORK CITY LANDMARKS PRESERVATION COMMISSION FINAL APPROVALS SIGNOFF:

- A. For all projects involving a Landmark Structure or Site, the Contractor, at the completion of the Work, must submit to the Commissioner, in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS, all documentation concerning the successful execution of all historic treatments. This must include, but not be limited to, copies of all before and after photographs of historic treatments, one copy of the Contractor's as-built drawings, copies of testing and analysis results, including cleaning, mortar analysis, pointing mortars and all other information pertaining to work performed under the NYC Landmarks Preservation Commission jurisdiction.

END OF SECTION 01 35 91



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 40 00
QUALITY REQUIREMENTS**

PART I– GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes the following:
 - 1. Definitions
 - 2. Engineering Services
 - 3. Conflicting Requirements
 - 4. Quality Assurance
 - 5. Quality Control
 - 6. Approval of Materials
 - 7. Special Inspections (Controlled Inspection)
 - 8. Inspections by Other City Agencies
 - 9. Certificates of Approval
 - 10. Acceptance Tests
 - 11. Repair and Protection
- B. This section includes administrative and procedural requirements for quality control to assure compliance with quality requirements specified in the Contract Documents.
- C. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Documents.
- D. Specified tests, inspections, and related actions do not limit Contractor's other quality assurance and quality control procedures that facilitate compliance with the Contract Documents.
- E. Provisions of this section do not limit requirements for the Contractor to provide quality assurance and quality control services required by the Commissioner or authorities having jurisdiction.
- F. Specific test and inspection requirements are specified in the individual sections of the Specifications.
- G. LEED: Refer to the Addendum to identify whether the Project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
- H. COMMISSIONING: Refer to the Addendum to identify whether the Project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning must be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS and/ or Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE. The Contractor must cooperate with the Commissioning Agent and provide whatever assistance is required.



1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" means the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (Drawings and Specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioning: A Total Quality Assurance process that includes checking the design and installation of equipment, as well as performing functional testing of the same to confirm that the installed equipment is operating and in conformance with the Contract Documents and the City's requirements.
- D. Installer/ Applicator/ Erector: Contractor or another entity engaged by Contractor as an employee or Subcontractor, to perform installation, erection, application, assembly and similar operations.
- E. Mockups: Full-size physical assemblies that are constructed on-site either as freestanding temporary built elements or as part of permanent construction. Mockups are constructed to verify selections made under sample Submittals; to demonstrate aesthetic effects and qualities of materials and execution; to review coordination, testing, or operation; to show interface between dissimilar materials; and to demonstrate compliance with specified installation tolerances. Mockups are not samples. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.
- F. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria.
- G. Product Tests: Tests and inspections that are performed by a Nationally Recognized Testing Laboratory (NRTL) according to 29 CFR 1910.7, by a testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.
- H. Source Quality-Control Tests: Tests and inspections that are performed at the source; for example, plant, mill, factory, or shop.
- I. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory means the same as testing agency.



- J. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- K. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements.

1.5 ENGINEERING SERVICES

- A. Performance and Design Criteria: Where professional design services provided by a professional engineer are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 - 1. If criteria indicated are insufficient to perform services or certification required, submit a written request for clarification to the Commissioner.

1.6 CONFLICTING REQUIREMENTS:

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, the Contractor must comply with the most stringent requirement. The Contractor must refer any uncertainties and/or conflicting requirements to the Commissioner for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified must be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. The Contractor must refer any uncertainties to the Commissioner for a decision before proceeding.

1.7 QUALITY ASSURANCE:

- A. General: Qualifications paragraphs in this Article establish the minimum qualification levels required. Individual Specification Sections may specify supplementary qualification requirements.
 - 1. **Minimum Experience:** Minimum Experience qualification levels as described herein, apply to all entities indicated in the Specification Sections for the Project, unless such entity requires Special Experience requirements per Subsection 1.7 A.2. below. Individual Specification Sections may specify supplementary qualification requirements.
 - 2. **Special Experience:** Special Experience qualification levels as described herein, apply to all entities indicated in the "Special Experience Requirements" page of the PASSPort procurement. Individual Specification Sections may specify supplementary qualification requirements.
- B. **Minimum Experience qualification levels:**
 - 1. **Qualifications for Installer or Applicator or Erector:** An entity complying with the requirements of authorities having jurisdiction and having, prior to the bid opening, been regularly engaged for a minimum of three (3) consecutive years in installing, erecting, applying, or assembling work in a timely fashion similar in material, design, and extent to that indicated for the Project, and whose work has resulted in construction with a record of successful in-service performance.



2. **Qualifications for Installer or Applicator or Erector requiring approval or certification or authorization by Manufacturer:** An entity complying with the requirements of authorities having jurisdiction and having, prior to the bid opening, been regularly engaged for a minimum of three (3) consecutive years in installing, erecting, applying, or assembling work in a timely fashion similar in material, design, and extent to that indicated for the Project, and whose work has resulted in construction with a record of successful in-service performance. In addition, the entity must be approved, or certified, or authorized by the manufacturers listed in the Specification Section and must be eligible to receive manufacturers' warranty.
3. **Qualifications for Fabricator:** An entity complying with the requirements of authorities having jurisdiction; having, prior to the bid opening, been regularly engaged for a minimum of three (3) consecutive years in producing products similar to those indicated for the Project and having a record of successful in-service performance, as well as sufficient production capacity to produce required units.
4. **Qualifications for Manufacturer:** An entity complying with the requirements of authorities having jurisdiction; having, prior to the bid opening, been regularly engaged for a minimum of three (3) consecutive years in manufacturing products or systems similar to those indicated for the Project; having a record of successful in-service performance for not less than three (3) consecutive years and having sufficient production capacity to produce required units. Manufacturer must meet warranty requirements and technical or factory-authorized service representative requirements.
5. **Qualifications for Specialist:** An entity complying with the requirements of authorities having jurisdiction; satisfying qualification requirements indicated in the Specification Section and having, prior to the bid opening, a minimum of three (3) consecutive years successfully engaged in the activities indicated.

C. Special Experience Qualification Levels:

1. **Special Qualifications for Installer or Applicator or Erector:** An entity complying with the requirements of authorities having jurisdiction and having, prior to the bid opening, been regularly engaged for a minimum of five (5) consecutive years in successfully installing, erecting, applying, or assembling work similar in material and design to that indicated for the Project. Entity must provide documentation of having successfully completed a minimum of three (3) projects similar in scope, size and type as required for the Project.
2. **Special Qualifications for Fabricator:** An entity complying with the requirements of authorities having jurisdiction; having, prior to the bid opening, been regularly engaged for a minimum of five (5) consecutive years in producing products similar to those indicated for the Project; having a record of successful in-service performance, as well as sufficient production capacity to produce required units. Entity must provide documentation of having successfully completed a minimum of three (3) projects similar in nature, size, and extent, to the requirements of the project.
3. **Special Qualifications for Installer of a Manufacturer-Warranted Roof System:** An entity complying with the requirements of authorities having jurisdiction; regularly engaged in performing roofing projects with its own workforce; having successfully completed in a timely fashion within the last three (3) consecutive years prior to the bid opening, at least three (3) roofing projects similar in scope, size and type to the required Project, and having performed at least one (1) of those projects in the last twelve (12) months. The three (3) qualifying projects must have utilized one or more of the roofing systems specified for the project being bid herein, been installed by the entity utilizing its own workforce and must have qualified for, and have been issued, the warranty provided by the manufacturer of the roofing system. In addition, the entity



must be a certified or authorized installer for the manufacturer's roofing systems specified herein and must submit proof of same.

4. **Special Qualifications for Installer of Roof tie-in to maintain existing Roof System**
Warranty: An entity complying with the requirements of authorities having jurisdiction; regularly engaged in performing roofing projects with its own workforce; having successfully completed in a timely fashion within the last three (3) consecutive years prior to the bid opening, at least three (3) roofing projects similar in scope, size and type to the required Project, and having performed at least one (1) of those projects in the last twelve (12) months. The three (3) qualifying projects must have utilized the manufacturer and manufacturer's Product, been installed by the entity utilizing its own workforce and must have qualified for, and have been issued, the warranty provided by the manufacturer listed in the technical specification. In addition, the entity must be a certified or authorized installer for this manufacturer's specified roofing system specified herein and must submit proof of same.
 5. **Special Qualifications for Manufacturer:** An entity complying with the requirements of authorities having jurisdiction; having, prior to the bid opening, been regularly engaged for a minimum of five (5) consecutive years in manufacturing products or systems similar to those indicated for the Project; having completed a minimum of three (3) projects similar in nature, size, and extent, to the requirements of the project; having a record of successful in-service performance, as well as sufficient production capacity to produce required units. Manufacturer must meet warranty requirements, and technical or factory-authorized service representative requirements.
 6. **Special Qualifications for Historic Treatment Specialist:** An entity complying with the requirements of authorities having jurisdiction and having prior to the bid opening, been regularly engaged for a minimum of five (5) consecutive years in successfully completing in a timely fashion projects similar in scope, size, and type to the required work, based on architectural style, construction method and materials and age of building for the project. Entity must provide documentation of having successfully completed a minimum of three (3) projects similar in scope, size and type as required for the Project, and where at least one (1) such prior project of the three (3) must have involved a landmarked building, as officially designated by the City, State, or Federal government.
- D. **Professional Engineer Qualifications:** A professional engineer who is licensed and registered to practice in the State of New York and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or products that are similar to those indicated for the Project in material, design, and extent.
 - E. **Factory-Authorized Service Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for the Project.
 - F. **Testing Agency Qualifications:** A Nationally Recognized Testing Laboratory (NRTL), a National Voluntary Laboratory Accreditation Program (NVLAP), or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented according to ASTM E329 (Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection); and with additional qualifications specified in individual Specification Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
 - G. **Preconstruction Testing:** Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
 1. Contractor responsibilities include the following:



- a. Provide test specimens representative of proposed products and construction.
 - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
 - c. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
 - d. Build site-assembled test assemblies and mockups using installers who will perform same tasks for Project.
 - e. Build laboratory mockups at testing facility using personnel, products, and methods of construction indicated for the completed Work.
 - f. When testing is complete, remove test specimens and test assemblies, and mockups, and laboratory mockups; do not reuse products on Project.
2. Testing Agency Responsibility: Submit a certified written report of each test, inspection, and similar quality-assurance service to Commissioner, with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.
- H. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
1. Build mockups in location and of size indicated or, if not indicated, as directed by the Commissioner.
 2. Notify Commissioner seven (7) days in advance of dates and times when mockups will be constructed.
 3. Demonstrate the proposed range of aesthetic effects and workmanship.
 4. Obtain Commissioner's approval of mockups before starting work, fabrication, or construction.
 5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 6. Demolish and remove mockups when directed, unless otherwise directed or indicated.
- I. Integrated Exterior Mockups: Construct integrated exterior mockup according to approved Shop Drawings or as indicated on Drawings. Coordinate installation of exterior envelope materials and products for which mockups are required in individual Specification Sections, along with supporting materials. Comply with requirements in "Mockups" Paragraph in this Section.
- J. Room Mockups: Construct room mockups according to approved Shop Drawings or as indicated on Drawings, incorporating required materials and assemblies, finished according to requirements. Provide required lighting and additional lighting where required to enable Commissioner to evaluate quality of the Work. Comply with requirements in "Mockups" Paragraph in this Section.
- K. Laboratory Mockups: Comply with the requirements of preconstruction testing and those specified in individual Specification Sections.

1.8 QUALITY CONTROL:

- A. City's Responsibilities: Where quality-control services are indicated as the City's responsibility in the Specifications, the City will engage a qualified testing agency to perform these services. (Refer to Special Inspections Article 1.10.)
1. COST OF TESTS BORNE BY THE CITY: Where the City directs tests to be performed to determine compliance with the Specifications regarding materials or equipment, and where such compliance is ascertained as a result thereof, the City will bear the cost of such tests.
 2. The City will furnish the Contractor with names, addresses, and telephone numbers of testing entities engaged and a description of the types of testing and inspecting they are engaged to perform.



3. Costs for retesting and re-inspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to the Contractor.
- B. Contractor's Responsibility: Tests and inspections not explicitly assigned to the City are the Contractor's responsibility. Unless otherwise indicated, the Contractor must provide quality control services as set forth in the Specifications and those required by authorities having jurisdiction, whether specified or not.
1. **COST OF TESTS BORNE BY CONTRACTOR** – In the case of tests which are specifically called for in the Specifications to be provided by the Contractor or tests which are required by any authority having jurisdiction, but are not indicated as the responsibility of the City, the cost thereof will be borne by the Contractor and will be deemed to be included in the Contract price. The Contractor must reimburse the City for expenditures incurred in providing tests on materials and equipment submitted by the Contractor as the equivalent of that specifically named in the Specifications and rejected for non-compliance.
 2. Where services are indicated as Contractor's responsibility, the Contractor must engage a qualified testing agency to perform these quality-control services. Any testing agency engaged by the Contractor to perform quality control services is subject to prior approval by the Commissioner.
 3. The Contractor must not employ same entity engaged by the City, unless agreed to in writing by the Commissioner.
 4. The Contractor must notify testing agencies and the Commissioner at least 72 hours in advance of the date and time for the performance of Work that requires testing or inspecting.
 5. Where quality control services are indicated as Contractor's responsibility, the Contractor must submit a certified written report of each quality-control service, in triplicate, to the Commissioner.
 6. Testing and inspecting requested by the Contractor and not required by the Contract Documents are Contractor's responsibility.
 7. The Contractor must submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Manufacturer's Field Services: Where indicated, the Contractor must engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Results must be submitted in writing as specified in Section 01 33 00 SUBMITTAL PROCEDURES. Manufacturer's field representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- D. Retesting/Re-inspecting: Regardless of whether the original tests or inspections were the Contractor's responsibility, the Contractor must provide quality control services, including retesting and re-inspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. Testing Agency Responsibilities: Cooperate with Commissioner and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Commissioner and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform duties of Contractor.
- F. Associated Services: The Contractor must cooperate with entities performing required tests, inspections, and similar quality control services, and must provide reasonable auxiliary services as requested. The



Contractor must notify the testing agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:

1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist testing entity in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing entities.
 6. Design mix proposed for use for material mixes that require control by the testing entity.
 7. Security and protection for samples and for testing and inspecting equipment at the Project site.
- G. Coordination: Coordinate sequence of activities to accommodate required quality assurance and quality control services with minimal delay and avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
 2. Coordinate and cooperate with the Commissioning Authority/Agent as applicable for start-up, inspection and functional testing in the implementation of the Commissioning Plan.
- H. Manufacturer's Directions: Where the Specifications provide that the manufacturer's directions are to be used, such printed directions must be submitted to the Commissioner.
- I. Inspection of Material: In the event that the Specifications require the Contractor to engage the services of an entity to witness and inspect any material especially manufactured or prepared for use in or part of the permanent construction, such entity will be subject to prior written approval by the Commissioner.
1. NOTICE - The Contractor must give notice in writing to the Commissioner, sufficiently in advance of its intention to commence the manufacture or preparation of materials especially manufactured or prepared for use in or as part of the permanent construction. Such notice must contain a request for inspection, the date of commencement, and the expected date of completion of the manufacture or preparation of materials. Upon receipt of such notice, the Commissioner will arrange to have a representative present at such times during the manufacture as may be necessary to inspect the materials, or the Commissioner will notify the Contractor that the inspection will be made at a point other than the point of manufacture, or the Commissioner will notify the Contractor that inspection will be waived.
- J. No Shipping Before Inspection: The Contractor must comply with the foregoing before shipping any material.
- K. Certificate of Manufacture: When the Commissioner so requires, the Contractor must furnish to the Commissioner, authoritative evidence in the form of Certificates of Manufacture that the materials to be used in the Work have been manufactured and tested in conformity with the Specifications. These certificates must include copies of the results of physical tests and chemical analyses where necessary, that have been made directly on the product, or on similar products being fabricated by the manufacturer. This may include such approvals as the Bureau of Standards and Appeals (B.S.A.), the Materials and Equipment (M.E.A.) acceptance Index, the Bureau of Electrical Control (B.E.C.), etc.
- L. Acceptance: When materials or manufactured products comprise of such quantity that it is not practical to make physical tests or chemical analyses directly on the product furnished, a certificate stating the results of such tests or analyses of similar materials which were concurrently produced may, at the discretion of the Commissioner, be considered as the basis for the acceptance of such material or manufactured product.
- M. Testing Compliance: The testing personnel must make the necessary inspections and tests, and the reports thereof must be in such form as will facilitate checking to determine compliance with the Specifications, indicating thereon all analyses and/or test data and interpreted results thereof.



- N. Reports: Reports in duplicate must be submitted and authoritative certification thereof must be furnished to the Commissioner as a prerequisite for the acceptance of any material or equipment.
- O. Rejections: If, in making any test, it is ascertained by the Commissioner that the material or equipment does not comply with the Specifications, the Contractor will be notified thereof, and will be directed to refrain from delivering said materials or equipment, or to promptly remove it from the site or from the Work and replace it with acceptable material at no additional cost to the City.
- P. Furnish Designated Materials: Upon rejection of any material or equipment submitted as the equivalent of that specifically named in the Specifications, the Contractor must immediately proceed to furnish the designated material or equipment.

1.9 APPROVAL OF MATERIALS:

- A. Local Laws: All materials, appliances and types or methods of construction must be in accordance with the Specifications and must in no event be less than that necessary to conform to the requirements of the New York City (NYC) Construction Codes, Administrative Code and Charter of the City of New York.
- B. Approval of Manufacturer: The names of proposed manufacturers, material suppliers, and dealers who are to furnish materials, fixtures, equipment, appliances or other fittings must be submitted to the Commissioner for approval, as early as possible, to afford proper review and analysis. No manufacturer will be approved for any materials to be furnished under the Contract unless it has a plant of ample capacity and have successfully produced similar products. All approvals of materials or equipment that are legally required by the NYC Construction Codes and other governing authorities must be obtained prior to installation.
- C. All Materials: Fixtures, fittings, supplies and equipment furnished under the Contract must be new and unused, except as approved by the Commissioner, and of standard first-grade quality and of the best workmanship and design. The City of New York encourages the use of recycled products where practical.
- D. INFORMATION TO SUPPLIERS - In asking for prices on materials under any item of the Contract, the Contractor must provide the manufacturer or dealer with such complete information from the Specifications and Contract Drawings as may in any case be necessary, and in every case the Contractor must inform the manufacturer or dealer of all the General Conditions and requirements herein contained.

1.10 SPECIAL INSPECTIONS:

- A. SPECIAL INSPECTIONS:
 - 1. Inspection of selected materials, equipment, installation, fabrication, erection, or placement of components and connections made during the progress of the Work to ensure compliance with the Contract Documents and provisions of the NYC Construction Codes, will be made by a Special Inspector. The City of New York will retain the services of the Special Inspector and bear the costs for the performance of Special Inspections in compliance with NYC Construction Codes requirements or as additionally may be called for in the project specifications, except as noted below for Form TR-3: Technical Report for Concrete Design Mix. The Special Inspector will be an entity that is in compliance with the requirements of the NYC Construction Codes. The Contractor must notify the relevant Special Inspector in writing at least 72 hours before the commencement of any Work requiring special inspection.
 - 2. Form TR3: Technical Report Concrete Design Mix: The Contractor will be responsible for, and bear all costs associated with the filing and securing of approvals, if any, for Form TR3: Technical Report Concrete Design Mix, including, but not limited to, engaging the services of a New York City licensed Concrete Testing Lab for the review and approval of concrete design mix, testing, signatures and professional seals, etc., compliant with NYC Department of Buildings requirements, for each concrete design mix.



3. The Contractor must notify the relevant Special Inspector in writing at least 72 hours before the commencement of any Work requiring Special Inspection. The Contractor will be responsible for and bear related costs to assure that all construction or work has suitable access and remains exposed for inspection purposes until the required inspection is completed.
4. Inspections and tests performed under “Special Inspection” will not relieve the Contractor of the responsibility to comply with the Contract Documents, and that there is no warranty given to the Contractor by the City of New York in connection with such inspection and tests or certifications made under “Special Inspections”.
5. The Contractor must coordinate with the Resident Engineer or DDC Project Manager to provide access and schedule the Work for inspection by the Special Inspector.

1.11 INSPECTIONS BY OTHER CITY AGENCIES:

- A. Letter of Completion: Just prior to Substantial Completion of the Project, the Commissioner will file with the Department of Buildings, an application for a Letter of Completion or a Certificate of Occupancy for the structure.
- B. Final Inspections: In connection with the above-mentioned application for a Letter of Completion or a Certificate of Occupancy and before certificates of final payments are issued, the Contractor will be required to arrange for all final inspections by the inspection staff of the Department of Buildings, Fire Department, or other Governmental Agencies having jurisdiction, and secure all reports, sign offs, certificates, etc., by such inspection staff or other governmental agencies, in order that a Letter of Completion or Certificate of Occupancy can be issued promptly.

1.12 CERTIFICATES OF APPROVAL:

- A. Responsibility: The Contractor will be responsible for and must obtain all final approvals for the Work installed under the Contract in the form of such certificates that are required by all governmental agencies having jurisdiction over the Work of the Contract.
- B. Transmittal: All such certificates must be forwarded to the DDC.

1.13 ACCEPTANCE TESTS:

- A. Government Agencies: All equipment and appliances furnished and installed under the Contract must conform to the requirements of the Specifications and will in no event be less than that necessary to comply with the minimum requirements of the law and all of the governmental agencies having jurisdiction.
- B. Notice of Tests: Whenever the Specifications and/or any governmental agency having jurisdiction requires the acceptance test, the Contractor will give to all concerned, written notice of the time when these tests will be conducted.
- C. Energy: The City will furnish all energy, fuel, water, and light required for tests.
- D. Labor and Materials: The Contractor must furnish labor and all other material and instruments necessary to conduct the acceptance tests at no additional cost to the City.
- E. Certificates: The Final Acceptance by the Commissioner will be contingent upon the Contractor delivering to the Commissioner all necessary certificates evidencing compliance in every respect with the requirements of the regulatory agencies having jurisdiction.
- F. Results: If the results of tests and Special Inspections indicate that the material or procedures do not meet requirements as set forth on the Contract Drawings or in the Specifications or are otherwise unsatisfactory, the Contractor must only proceed as directed by the Commissioner. Additional costs resulting from retesting, re-inspecting, replacing of material and/or damage to the Work and any delay caused to the schedule will be borne by the Contractor.



PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, the Contractor must repair damaged construction and restore substrates and finishes.
 - 1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.

END OF SECTION 01 40 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 42 00
REFERENCES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 DEFINITIONS:

REFER TO THE ADDENDUM, Article IX, FOR ADDITIONAL DEFINITIONS AND REVISIONS TO THE CONTRACT AND SPECIFICATIONS

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. "APPROVED," ETC. - "Approved," "acceptable," "satisfactory," and words of similar import will mean and intend approved, acceptable, or satisfactory to the Commissioner.
- C. Design Consultant: "Design Consultant" means the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- D. "DIRECTED," "REQUIRED," ETC.- Wherever reference is made in the Contract to the Work or its performance, the terms "directed," "required," "permitted," "ordered," "designated," "prescribed," "determined," and words of similar import will, unless expressed otherwise, imply the direction, requirements, permission, order, designation or prescription of the Commissioner.
- E. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings.



1.3 CODES, AGENCIES AND REGULATIONS:

A.B.A	Architectural Barriers Act
A.D.A.A.G.	Americans with Disabilities Act (ADA) Accessibility Guidelines
B.G. & E.	Bureau of Gas and Electricity of the City of New York
B.S. A.	New York City Board of Standards and Appeals
DOE	Department of Energy
E.C.C.C.N.Y.S.	Energy Conservation Construction Code of New York State
EPA	Environmental Protection Administration
N.Y.C.C.C.	New York City Construction Codes
N.Y.C.P.C.	New York City Plumbing Code
N.Y.C.B.C.	New York City Building Code
N.Y.C.M.C.	New York City Mechanical Code New York
N.Y.C.F.G.C.	New York City Fuel Gas Code
N.Y.S. D.O.L	New York State Department of Labor
N.Y.C.D.O.B.	New York City Department of Buildings
N.Y.C.D.E.P.	New York City Department of Environmental Protection
N.Y.C.D.O.T.	New York City Department of Transportation
N.Y.C.E.C.	New York City Electrical Code
N.Y.C.E.C.C	New York City Energy Conservation Code
N.Y.C.F.C.	New York City Fire Code
N.Y.S...D.E.C.	New York State Department of Environmental Conservation
O.S.H.A.	Occupational Safety & Health Administration

1.4 INDUSTRY STANDARDS:

- A. STANDARD REFERENCES – Unless otherwise specifically indicated in the Contract Documents, whenever reference is made to the furnishing of materials or testing thereof that conforms to the standards of any technical society, organization or body, it must be construed to mean the latest standard, code, specification adopted and published by that technical society, organization or body, as of the date of the bid opening, unless the provisions of the N.Y.C.C.C. adopts a different or earlier dated version of such standard. All references to the ICC A117.1 are only to the 2009 version, whether or not a specific version is specified.
- B. APPLICABILITY OF STANDARDS: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect, to the extent referenced, as if bound or copied directly into the Contract Documents. Such standards are made a part of the Contract Documents by reference.
- C. CONFLICTING REQUIREMENTS: Where compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantity or quality, comply with the most stringent requirements. Immediately refer uncertainties and requirements that are different but apparently equal, to the Commissioner in writing for a decision before proceeding.



- D. STANDARD SPECIFICATIONS - When no reference is made to a code, standard, or specification, the Standard Specifications of the ASTM or the AIEE, as the case may be, shall govern.
- E. REFERENCES - Reference to a technical society, organization, or body may be made in the Specifications by abbreviations. Abbreviations and acronyms used in the Specifications and other Contract Documents mean the associated name. The following names are subject to change and are believed, but are not assured, to be accurate and up-to-date as of the Issue Date of the Contract Documents.

AA	Aluminum Association, Inc. (The)
AAADM	American Association of Automatic Door Manufacturers
AABC	Associated Air Balance Council
AAMA	American Architectural Manufacturers Association
AAPFCO	Association of American Plant Food Control Officials
AASHTO	American Association of State Highway and Transportation Officials
AATCC	American Association of Textile Chemists and Colorists (The)
ABAA	Air Barrier Association of America
ABMA	American Bearing Manufacturers Association
ACI	ACI International (American Concrete Institute)
ACAC	American Council for Accredited Certification
ACPA	American Concrete Pipe Association
AEIC	Association of Edison Illuminating Companies, Inc. (The)
AF&PA	American Forest & Paper Association
AGA	American Gas Association
AGC	Associated General Contractors of America (The)
AGMA	American Gear Manufacturer Association
AHA	American Hardboard Association (Now part of CPA)
AHAM	Association of Home Appliance Manufacturers



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

AI	Asphalt Institute
AIA	American Institute of Architects (The)
AIEE	American Institute of Electrical Engineers
AIHA	American Industrial Hygiene Association
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AITC	American Institute of Timber Construction
ALCA	Associated Landscape Contractors of America (Now PLANET - Professional Landcare Network)
ALSC	American Lumber Standard Committee, Incorporated
ALI	Automotive Lift Institute
AMCA	Air Movement and Control Association International, Inc.
ANSI	American National Standards Institute
AOSA	Association of Official Seed Analysts, Inc.
APA	APA - The Engineered Wood Association
APA	Architectural Precast Association
API	American Petroleum Institute
ARI	Air-Conditioning & Refrigeration Institute
ARMA	Asphalt Roofing Manufacturers Association
ASA	American Standards Association
ASAE	American Society of Agricultural Engineers
ASCE/SEI	American Society of Civil Engineers, Structural Engineering Institute
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASSE	American Society of Sanitary Engineering



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

ASTM	ASTM International (Formerly: American Society for Testing and Materials)
AWCI	Association of the Wall and Ceiling Industry
AWCMA	American Window Covering Manufacturers Association (Now WCSC)
AWI	Architectural Woodwork Institute
AWPA	American Wood-Preservers' Association
AWSC	American Welding Society
AWWA	American Water Works Association
BHMA	Builders Hardware Manufacturers Association
BIA	Brick Industry Association (The)
BICSI	Building Industry Consulting Services International
BIFMA	BIFMA International (Business and Institutional Furniture Manufacturer's Association International)
BISSC	Baking Industry Sanitation Standards Committee
CIBSE	Chartered Institute of Building Services Engineers
CCC	Carpet Cushion Council
CDA	Copper Development Association
CEA	Consumer Electronics Association
CESB	Council of Engineering and Scientific Specialty Boards
CFFA	Chemical Fabrics & Film Association, Inc.
CFSEI	Cold-Formed Steel Engineers Institute
CGA	Compressed Gas Association
CGSB	Canadian General Standards Board
CIMA	Cellulose Insulation Manufacturers Association
CIPRA	Cast Iron Pipe Research Association



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

CISCA	Ceilings & Interior Systems Construction Association
CISPI	Cast Iron Soil Pipe Institute
CLFMI	Chain Link Fence Manufacturers Institute
CPA	Composite Panel Association
CPPA	Corrugated Polyethylene Pipe Association
CPSC	Consumer Product Safety Commission
CRI	Carpet & Rug Institute (The)
CRSI	Concrete Reinforcing Steel Institute
CSA	Canadian Standards Association
CSI	Cast Stone Institute
CSI	Construction Specifications Institute (The)
CSSA	Certified Steel Stud Association
CSSB	Cedar Shake & Shingle Bureau
CTI	Cooling Technology Institute (Formerly: Cooling Tower Institute)
DASMA	Door and Access Systems Manufacturer's Association International
DHI	Door and Hardware Institute
DOC	U.S. Department of Commerce – National Institute of Standards and Technology
EIA	Electronic Industries Alliance
DOJ	U.S. department of Justice
EIMA	EIFS Industry Members Association
DOL	U.S. Department of labor
EJCDC	Engineers Joint Contract Documents Committee



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

DOTn	U.S. Department of Transportation
EN	European Committee of Standards
EJMA	Expansion Joint Manufacturers Association, Inc.
ESD	ESD Association
EVO	Efficiency Valuation Organization
FEMA	Federal Emergency Management Agency
FIBA	Federation Internationale de Basketball Amateur (The International Basketball Federation)
FIVB	Federation Internationale de Volleyball (The International Volleyball Federation)
FMG	FM Global (Formerly: FM - Factory Mutual System)
FMRC	Factory Mutual Research (Now FMG)
FRSA	Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.
FSA	Fluid Sealing Association
FSC	Forest Stewardship Council
GA	Gypsum Association
GANA	Glass Association of North America
GRI	(Now GSI)
GS	Green Seal
GSI	Geosynthetic Institute
HI	Hydraulic Institute
HI	Hydronics Institute
HMMA	Hollow Metal Manufacturers Association (Part of NAAMM)
HPVA	Hardwood Plywood & Veneer Association
HPW	H. P. White Laboratory, Inc.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

HUD	U.S. Department of Housing and Urban Development
IAPMO	International Association of Plumbing and Mechanical Officials
IAS	International Approval Services (Now CSA International)
IBF	International Badminton Federation
ICC	International Code Council, Inc.
ICEA	Insulated Cable Engineers Association, Inc.
ICRI	International Concrete Repair Institute, Inc.
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc. (The)
IESNA	Illuminating Engineering Society of North America
IEST	Institute of Environmental Sciences and Technology
IGCC	Insulating Glass Certification Council
IGMA	Insulating Glass Manufacturers Alliance
IICRC	Institute of Inspection, Cleaning, and Restoration
ILIA	Indiana Limestone Institute of America, Inc.
IPEMA	International Play Equipment Manufacturers Association
ISA	International Society of Arboriculture
ISO	International Organization for Standardization
ISSFA	International Solid Surface Fabricators Association
ITS	Intertek
ITU	International Telecommunication Union
KCMA	Kitchen Cabinet Manufacturers Association
LMA	Laminating Materials Association (Now part of CPA)



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

LPI	Lightning Protection Institute
MBMA	Metal Building Manufacturers Association
MFMA	Maple Flooring Manufacturers Association, Inc.
MFMA	Metal Framing Manufacturers Association
MH	Material Handling (Now MHIA)
MHIA	Material Handling Industry of America
MIA	Marble Institute of America
MIL	Military Specification Standards of the US Dept of Defense
MPEG	Moving Picture Experts Group
MPI	Master Painters Institute
MSS	Manufacturers Standardization Society of The Valve and Fittings Industry Inc.
NAAMM	National Association of Architectural Metal Manufacturers
NACE	NACE International (National Association of Corrosion Engineers International)
NADCA	National Air Duct Cleaners Association
NAGWS	National Association for Girls and Women in Sport
NAIMA	North American Insulation Manufacturers Association
NBA	National Basketball Association
NBGQA	National Building Granite Quarries Association, Inc.
NCAA	National Collegiate Athletic Association (The)
NCMA	National Concrete Masonry Association
NCPI	National Clay Pipe Institute
NCTA	National Cable & Telecommunications Association
NEBB	National Environmental Balancing Bureau



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

NECA	National Electrical Contractors Association
NeLMA	Northeastern Lumber Manufacturers' Association
NEMA	National Electrical Manufacturers Association
NETA	InterNational Electrical Testing Association
NFHS	National Federation of State High School Associations
NFPA	NFPA (National Fire Protection Association)
NFRC	National Fenestration Rating Council
NGA	National Glass Association
NHLA	National Hardwood Lumber Association
NICET	National Institute for Certification in Engineering Technologies
NLGA	National Lumber Grades Authority
NIS	National Institute of Standards and Technology
NOFMA	NOFMA: The Wood Flooring Manufacturers Association (Formerly: National Oak Flooring Manufacturers Association)
NRCA	National Roofing Contractors Association
NRDCA	National Roof Deck Association
NRMCA	National Ready Mixed Concrete Association
NSI	Natural Stone Institute
NSF	NSF International (National Sanitation Foundation International)
NSSGA	National Stone, Sand & Gravel Association
NTMA	National Terrazzo & Mosaic Association, Inc. (The)
NTRMA	National Tile Roofing Manufacturers Association (Now TRI)
NWWDA	National Wood Window and Door Association (Now WDMA)
OPL	Omega Point Laboratories, Inc. (Acquired by ITS - Intertek)



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

PCI	Precast / Pre-stressed Concrete Institute
PDCA	Painting & Decorating Contractors of America
PDI	Plumbing & Drainage Institute
PGI	PVC Geomembrane Institute
PLANET	Professional Landcare Network (Formerly: ACLA - Associated Landscape Contractors of America)
PPS	Power Piping Society
PTI	Post-Tensioning Institute
RCSC	Research Council on Structural Connections
RFCI	Resilient Floor Covering Institute
RIS	Redwood Inspection Service
RMI	Rack Manufacturers Institute
RTI	(Formerly: NTRMA - National Tile Roofing Manufacturers Association) (Now TRI)
RUS	Rural Utilities Service, Department of Agriculture
SAE	SAE International
SCAQMD	South Coast Air Quality Management District
SCS	Scientific Certification System
SDI	Steel Deck Institute
SDI	Steel Door Institute
SEFA	Scientific Equipment and Furniture Association
SGCC	Safety Glazing Certification Council
SHBI	Steel Heating Boiler Institute
SIA	Security Industry Association
SIGMA	Sealed Insulating Glass Manufacturers Association (Now IGMA)



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

SFIA	Steel Framing Industry Association
SJI	Steel Joist Institute
SMA	Screen Manufacturers Association
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association
SMPTE	Society of Motion Picture and Television Engineers
SPFA	Spray Polyurethane Foam Alliance (Formerly: SPI/SPFD - The Society of the Plastics Industry, Inc.; Spray Polyurethane Foam Division)
SPIB	Southern Pine Inspection Bureau (The)
SPRI	Single Ply Roofing Industry
SSINA	Specialty Steel Industry of North America
SSMA	the Steel Stud Manufacturers Association
SSPC	SSPC: The Society for Protective Coatings
SSSA	Soil Science Society of America
STI	Steel Tank Institute
SWI	Steel Window Institute
SWRI	Sealant, Waterproofing, & Restoration Institute
TABB	Testing, Adjusting, and Balancing Bureau
TCA	Tile Council of America, Inc.
TIA/EIA	Telecommunications Industry Association/Electronic Industries Alliance
TMS	The Masonry Society
TPI	Truss Plate Institute, Inc.
TPI	Turfgrass Producers International
TRI	Tile Roofing Institute (Formerly: RTI - Roof Tile Institute)
UL	Underwriters Laboratories Inc.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

ULC	Underwriters Laboratories of Canada
UNI	Uni-Bell PVC Pipe Association
USAV	USA Volleyball
USC	United States Code
USGBC	U.S. Green Building Council
USITT	United States Institute for Theatre Technology, Inc.
WASTEC	Waste Equipment Technology Association
WCLIB	West Coast Lumber Inspection Bureau
WCMA	Window Covering Manufacturers Association (Now WCSC)
WCSC	Window Covering Safety Council (Formerly: WCMA - Window Covering Manufacturers Association)
WDMA	Window & Door Manufacturers Association (Formerly: NWWDA - National Wood Window and Door Association)
WNBA	Women's National Basketball Association
WI	Woodwork Institute (Formerly: WIC - Woodwork Institute of California)
WIC	Woodwork Institute of California (Now WI)
WMMPA	Wood Moulding & Millwork Producers Association
WRI	Wire Reinforcement Institute, Inc.
USEPA	United States Environmental Protection Agency
WSRCA	Western States Roofing Contractors Association
WWPA	Western Wood Products Association

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 42 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 50 00
TEMPORARY FACILITIES, SERVICES AND CONTROLS**

PART I– GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Temporary Water System
 - 2. Temporary Sanitary Facilities
 - 3. Temporary Electric Power, Temporary Lighting System, and Site Security Lighting
 - 4. Temporary Heat
 - 5. Dewatering Facilities and Drains
 - 6. Temporary Field Office for Contractor
 - 7. DDC Field Office
 - 8. Material Sheds
 - 9. Temporary Enclosures
 - 10. Temporary Partitions
 - 11. Temporary Fire Protection
 - 12. Work Fence Enclosure
 - 13. Rodent and Insect Control
 - 14. Plant Pest Control Requirements
 - 15. Project Identification Signage
 - 16. Project Construction Sign and Rendering
 - 17. Security Guards/Fire Guards on Site
 - 18. Safety

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 54 11 TEMPORARY ELEVATORS AND HOISTS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



<u>Term</u>	<u>Definition</u>
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the Design Consultant may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Permanent Enclosure	As determined by the Commissioner, permanent or temporary roofing that is complete, insulated, and weather tight; exterior walls which are insulated and weather tight; and all openings that are closed with permanent construction or substantial temporary closures.

1.5 SUBMITTALS:

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Reports: Submit reports of tests, inspections, meter readings and similar procedures for temporary use.

1.6 PROJECT CONDITIONS:

- A. Temporary Use of Permanent Facilities and Services: The Contractor will be responsible for the operation, maintenance, and protection of each permanent facility and service during its use as a construction facility before Final Acceptance by the City, regardless of previously assigned responsibilities.
- B. The Contractor must install, operate, maintain and protect temporary facilities, services, and controls, including without limitation:
 - 1. Keep temporary services and facilities clean and neat in appearance;
 - 2. Operate temporary services in a safe and efficient manner;
 - 3. Relocate temporary services and facilities as needed as Work progresses;
 - 4. Do not overload temporary services and facilities or permit them to interfere with progress;
 - 5. Provide necessary fire prevention measures; and
 - 6. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on-Site.

1.7 NON-REGULAR WORK HOURS (OVERTIME):

- A. The Contractor must provide the temporary services, facilities and controls set forth in this section during non-regular working hours if the Contract Drawings and/or the Specifications indicate that the Work, or specific components thereof, must be performed during non-regular working hours. In such case, all costs for the provision of temporary services, facilities and controls during non-regular working hours will be deemed included in the total Contract price.
- B. The Contractor must provide the temporary services, facilities and controls set forth in this section during non-regular working hours if a change order is issued directing the Contractor to perform the Work, or specific components thereof, during non-regular working hours. In such case, compensation for the provision of temporary services, facilities and controls during non-regular working hours will be provided



through the change order.

1.8 SERVICES BEYOND COMPLETION DATE:

- A. The Contractor must provide the temporary services, facilities and controls set forth in this section until the date on which it completes all required Work at the Site, including all Final Approved Punch List Work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor must provide such temporary services, facilities and controls even if completion of all required Work at the Site occurs after the time fixed for such completion in Schedule A.

PART II – PRODUCTS

2.1 MATERIALS:

- A. The Contractor must provide undamaged materials in serviceable condition and suitable for use intended.
- B. Tarpaulins: Waterproof, fire-resistant UL labeled with flame spread rating of fifteen (15) or less. For temporary enclosures, provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.
- C. Water: Potable and in compliance with requirements of the New York City Department of Environmental Protection (DEP).

2.2 EQUIPMENT:

- A. The Contractor must provide undamaged equipment in serviceable condition and suitable for use intended.
- B. Water Hoses: Heavy-duty abrasive-resistant flexible rubber hoses, one hundred (100) feet (thirty (30) m) long with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
- C. Electric Power Cords: Grounded extension cords.
 - 1. Provide hard-service cords where exposed to abrasion or traffic.
 - 2. Provide waterproof connectors to connect separate lengths of electric cords where single lengths do not reach areas of construction Activity.
 - 3. Do not exceed safe length-voltage ratio.
- D. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

PART III –EXECUTION:

3.1 INSTALLATION, GENERAL:

- A. The Contractor must locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. The Contractor must provide each facility ready for use when needed to avoid delay. The Contractor must not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities as approved by the Resident Engineer.



3.2 TEMPORARY WATER SYSTEM:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 A

- A. TEMPORARY WATER SYSTEM - NEW FACILITIES: During construction, the Contractor must furnish a Temporary Water System as set forth below.
1. Immediately after the Commissioner has issued an order to start the Work, the Contractor must file an application with DEP for the schedule of charges for water use during construction. The Contractor will be responsible for payment of water charges.
 2. Immediately after the Commissioner has issued an order to start the Work, the Contractor must file an application with DEP's Bureau of Water Supply and obtain a permit to install the temporary water supply system. The system must be installed and maintained for the use of the Contractor and its subcontractors. A copy of the above-mentioned permit must be filed with the Commissioner. The Contractor must provide temporary water main, risers and waste stacks as directed and install on each floor, outlets with two (2) 3/4" hose valve connections over a barrel installed on a steel pan. The Contractor must provide drains from the pans to the stack and house sewer and hose bibs to drain the water supply risers and mains. During winter months, the Contractor must take the necessary precautions to prevent the temporary water system from freezing. The Contractor must provide repairs to the temporary water supply system for the duration of the Project until said temporary system is dismantled and removed.
 3. Disposition of Temporary Water System: The Contractor will be responsible for dismantling the temporary water system when no longer required for the construction operations, or when replaced by the permanent water system installed for the Project, or as otherwise directed by the Resident Engineer. All repair work resulting from the dismantling of the temporary water system will be the responsibility of the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 B

- B. TEMPORARY WATER SYSTEM – PROJECTS IN EXISTING FACILITIES:
1. When approved by the Commissioner, use of existing water system will be permitted for temporary water service during construction, as long as the system is cleaned and maintained in a condition acceptable to the Commissioner. At Substantial Completion, the Contractor must restore the existing water system to conditions existing before initial use.
 2. The Contractor will be responsible for all repairs to the existing water system permitted to be used for temporary water service during construction. The Contractor will be responsible to maintain the existing system in a clean condition on a daily basis, acceptable to the Commissioner.
 3. The Contractor will be responsible for payment of water charges as directed by the Commissioner. Billing will be in accordance with the New York City Water Board Water and Wastewater Rate Schedule.
- C. WASH FACILITIES: The Contractor must install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a healthy and sanitary condition, including without limitation:
1. Dispose of drainage properly;
 2. Supply cleaning compounds appropriate for each condition; and
 3. Include safety showers, eyewash fountains and similar facilities for the convenience, safety and sanitation of personnel.
- D. DRINKING WATER FACILITIES: The Contractor must provide drinking water fountains or containerized tap-dispenser bottled-drinking water units, complete with paper cup supplies. Where power is available, provide



electric water coolers to maintain dispensed water temperature at forty-five (45) to fifty-five (55) deg. F (7 to 13 deg. C).

3.3 TEMPORARY SANITARY FACILITIES:

- A. The Contractor must provide toilets, wash facilities, and drinking water fixtures in compliance with regulations and health codes for type, number, location, operation and maintenance of fixtures and facilities. Provide toilet tissue, paper towels, paper cups and similar disposable materials as appropriate for each facility, and provide covered waste containers for used materials.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 B

- B. SELF-CONTAINED TOILET UNITS:

- 1. The Contractor must provide temporary single-occupant toilet units of the chemical, aerated recirculation, or combustion type for use by all construction personnel. Units must be properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material. Quantity of toilet units must comply with the latest Occupational Safety and Health Administration (OSHA) regulations.
- 2. Toilets: The Contractor must install separate, self-contained toilet units for male and female personnel. Shield toilets to ensure privacy.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 C

- C. EXISTING TOILETS:

- 1. TOILET FACILITIES: When approved by the Commissioner, the Contractor must arrange for the use of existing toilet facilities by all personnel during the execution of the Work. The Contractor will be responsible to clean and maintain facilities in a condition acceptable to the Resident Engineer and, at Substantial Completion, to restore facilities to the condition at the time of initial use.
- 2. MAINTENANCE - The Contractor must maintain the temporary toilet facilities in a clean and sanitary manner and make all necessary repairs.
- 3. NUISANCES - The Contractor must not cause any sanitary nuisance to be committed by its employees or the employees of its subcontractors in or about the Work and must enforce all sanitary regulations of the City and State Health Authorities.

3.4 TEMPORARY ELECTRIC POWER, TEMPORARY LIGHTING SYSTEM, AND SITE SECURITY LIGHTING:

- A. SCOPE: This section sets forth the General Conditions and procedures relating to Temporary Electric Power, Temporary Lighting System, and Site Security Lighting during the construction period.
- B. TEMPORARY ELECTRIC POWER: The Contractor must provide and maintain a temporary electric power service and distribution system of sufficient size, capacity and power characteristics required for construction operations for all required Work by the Contractor and its subcontractors, including but not limited to, power for the temporary lighting system, site security lighting, construction equipment, hoists, temporary elevators and all field offices. temporary electric power must be provided as follows:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (1)

- 1. CONNECTION TO UTILITY LINES:

- a. Temporary electric power service for use during construction must be provided as follows: The Contractor must make all necessary arrangements with the public utility company and pay all charges for the Temporary Electric Power system. The Contractor must include in its total Contract price any charges for temporary electric power, including charges that may be made



- by the public utility company for extending its electrical facilities, and for making final connections. The Contractor will make payment directly to the public utility company.
- b. **APPLICATIONS FOR METER:** The Contractor must complete an application to the public utility company and sign all documents necessary for, and pay all charges incidental to, the installation of a watt hour meter or meters for Temporary Electric Power. The Contractor must pay to the public utility company all bills for temporary electric energy used throughout the Work as they become due.
 - c. **SERVICE AND METERING EQUIPMENT:** The Contractor must furnish and install, at a suitable location on the Site, approved service and metering equipment for the Temporary Electric Power System, ready for the installation of the public utility company's metering devices. The temporary service mains to and from the metering location must not be less than one hundred (100) Amperes, 3-phase, 4-wire and must be of sufficient capacity to take care of all demands for all construction operations and must meet all requirements of the New York City Electrical Code.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (2)

- 2. **CONNECTION TO EXISTING ELECTRICAL POWER SERVICE:**
 - a. When approved by the Commissioner, electrical power service for the temporary lighting system and for the operation of small tools and equipment less than ¼ horsepower may be taken from the existing electric distribution system if the existing system is of adequate capacity for the temporary power load. The Contractor must cooperate and coordinate with the facility custodian, so as not to interfere with the normal operation of the facility.
 - b. There will be no charge to the Contractor for the electrical energy consumed.
 - c. The Contractor must provide, maintain and pay all costs for separate temporary electric power for any temporary power for equipment larger than 1/4 horsepower. When directed by the Commissioner, the Contractor must remove its own temporary power system.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (3)

- 3. **ELECTRICAL GENERATOR POWER SERVICE:**
 - a. When connection to utility lines or existing facility electric service is not available or is not adequate to supply the electric power need for construction operations, the Contractor must provide self-contained generators to provide power beyond that available.
 - b. Pay for all energy consumed in the progress of the Work, exclusive of that available from the existing facility or utility company.
 - c. Provide for control of noise from the generators.
 - d. Comply with the Ultra Low Sulfur Fuel in Non-Road Vehicles requirements as set forth in Article 5.4 of the Contract.
- C. **USE OF COMPLETED PORTIONS OF THE ELECTRICAL WORK:**
 - 1. **USE OF MAIN DISTRIBUTION PANEL:** As soon as the permanent electric service feeders and equipment metering equipment and main distribution panel are installed and ready for operation, the Contractor must have the temporary lighting and power system changed over from the temporary service points to the main distribution panel.
 - 2. **COST OF CHANGE OVER:** The Contractor will be responsible for all costs due to this change over of service and it must also make application to the public utility company for a watt hour meter to be set on the permanent meter equipment.



3. The requirements for temporary electric power service specified herein must be adhered to after change over of service until Final Acceptance of the Project.
4. **NO EXTRA COST:** The operation of the service and switchboard equipment will be under the supervision of the Contractor, but this will in no way be interpreted to mean the acceptance of such part of the installation or relieve the Contractor from its responsibility for the complete Work or any part thereof. There will be no additional charge for supervision by the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 D

D. TEMPORARY LIGHTING SYSTEM:

1. The Contractor must provide adequate service for the temporary lighting system, or a minimum of one hundred (100) Amperes, 3-phase, 4-wire service for the temporary lighting system, whichever is greater, and make all necessary arrangements with the public utility company and pay all charges by them for the Temporary Lighting System.
2. The Contractor must furnish and connect to the metered service point a Temporary Lighting System to illuminate the entire area where Work is being performed and points adjacent to the Work, with separately fused circuits for stairways and bridges. Control switches for stairway circuits must be located near entrance on ground floor.
3. **ITEMS:** The Temporary Lighting System provided by the Contractor must consist of wiring, fixtures, left-hand double sockets (one (1) double socket for every 400 square feet, with one (1) lamp and one (1) three-prong outlet), lamps, fuses, locked-type guards, pigtails and any other incidental material. Additional details may be outlined in the detailed Specifications for the electrical Work. Changes may be made, provided the full equivalent of those requirements is maintained.
4. The Temporary Lighting System will be progressively installed as required for the advancement of the Work under the Contract.
5. **RELOCATION:** The cost for the relocation or extension of the original Temporary Lighting System, as required by the Contractor or its subcontractors, that is not required due to the normal advancement of the Work, as determined by the Resident Engineer, will be borne by the Contractor.
6. **PIGTAILS:** The Contractor must furnish pigtails with left-hand sockets with locked-type guards and forty (40) feet of rubber covered cable. The Contractor must furnish and distribute a minimum of three (3) complete pigtails to each subcontractor. See the detailed Electrical Specifications for possible additional pigtails required.
7. **LAMPS:** The Contractor must furnish and install one (1) complete set of lamps, including those for the trailers. Broken and burned out lamps in the temporary lighting system, DDC field office, and construction trailers must be replaced by the Contractor. All lamps must be compact fluorescent.
8. **CIRCUIT PROTECTION:** The Contractor must furnish and install Ground Fault Interruption (GFI) protection for the temporary lighting and site security lighting systems.
9. **MAINTENANCE OF TEMPORARY LIGHTING SYSTEM:**
 - a. The Contractor must maintain the Temporary Lighting System in good working order during the scheduled hours established.
 - b. The Contractor must include in its total Contract price all costs in connection with the Temporary Lighting System, including all costs for installation, maintenance and electric power.
10. **REMOVAL OF TEMPORARY LIGHTING SYSTEM:** The temporary lighting system must be removed by the Contractor when authorized by the Commissioner.



11. **HAND TOOLS:** The temporary lighting system must not be used for power purposes, except that light hand tools not larger than 1/4 horsepower may be operated from such system by the Contractor and its subcontractors.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 E

E. SITE SECURITY LIGHTING (NEW CONSTRUCTION ONLY):

1. The Contractor must furnish, install and maintain a system of site security lighting, as herein specified, to illuminate the construction Site of the Project, with the system connected to and energized from the Temporary Lighting System. All costs in connection with site security lighting will be deemed included in the total Contract price.
2. It is essential that the site security lighting system be completely installed and operating at the earliest possible date. The Contractor must direct its subcontractors to cooperate, coordinate and exert every effort to accomplish an early complete installation of the site security lighting system. If, after the system is installed and in operation, a part of the system interferes with the Work of any trade, the Contractor will be completely responsible for the expense of removing, relocating, and replacing all equipment necessary to reinstate the system to proper operating conditions.
3. The system must consist of flood lighting by pole-mounted guarded sealed-beam units. Floodlight units must be mounted sixteen (16) feet above grade. Floodlights must be spaced around the perimeter of the Site to produce an illumination level of no less than one (1) foot candle around the perimeter of the Site, as well as in any potentially hazardous area or any other area within the Site that might be deemed by the Resident Engineer to require security illumination. The system must be installed in a manner acceptable to the Resident Engineer. The first lighting unit in each circuit must be provided with a photoelectric cell for automatic control. The photoelectric cell must be installed as per manufacturer's recommendations.
4. All necessary poles must be furnished and installed by the Contractor.
5. The site security lighting must be kept illuminated at all times during the hours of darkness. The Contractor must, at its own expense, keep the system in operation and must furnish and install all material necessary to replace all damaged or burned out parts.
6. The Contractor must be on telephone call alert for maintaining the system during the operating period stated above.
7. All materials and equipment furnished under this section will remain the property of the Contractor and must be removed and disposed of by the Contractor when authorized in writing by the Resident Engineer.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 TEMPORARY HEAT:

A. GENERAL:

1. **Definition:** The provision of Temporary Heat means the provision of heat in order to permit construction to be performed in accordance with the Progress Schedule during all seasons of the year and to protect the Work from the harmful effects of low temperature. In the event the building, or any portion thereof, is occupied during construction, the provision of Temporary Heat will include the provision of heat to permit normal operations in such occupied areas.
 - a. The provision of Temporary Heat must be in accordance with the temperature requirements set forth in sub-section 3.5 C herein.
 - b. The provision of Temporary Heat must include the provision of: 1) all fuel necessary and required, 2) all equipment necessary and required, and 3) all operating labor necessary and required.



- required. Operating labor must mean that minimum force required for the safe day-to-day operation of the system for the provision of Temporary Heat and must include, without limitation, heating maintenance labor and/or fire watch as required by New York City Fire Department (FDNY) regulations. Operating labor may be required seven (7) days per week and during non-regular working hours, for the period of time required by seasonal weather conditions.
- c. In the event the building, or any portion thereof, is occupied and the Project involves the replacement, modification, and/or shut down of the permanent heating system, or any key component thereof, and such system is a combined system which furnishes domestic hot water for the building occupants, the provision of Temporary Heat must include the provision of domestic hot water at the same temperature as the system which is being replaced. Domestic hot water must be provided in accordance with the phasing requirements set forth in the Contract Documents.
2. Responsibility: The Contractor's responsibility for the provision of Temporary Heat, including all expenses in connection therewith, is as set forth below:
- a. Projects involving enclosure of the building:
- 1) Prior to Enclosure: Until the Commissioner determines that the building has been enclosed, as set forth in sub-section 3.5 B, the Contractor is responsible for the provision of Temporary Heat.
 - 2) Post Enclosure: Once the Commissioner determines that the building, or any portion thereof, has been enclosed, as set forth in sub-section 3.5 B, the Contractor is responsible for the provision of Temporary Heat by one or more of the following means: 1) by an existing heating system (if any), 2) by a permanent heating system which is being installed as part of the Project, or 3) by a temporary heating system(s).
 - 3) The Contractor must, within two (2) weeks of the kick-off meeting, submit to DDC for review its proposed plan to provide Temporary Heat. Such plan is subject to approval by the Resident Engineer. The Contractor must provide Temporary Heat in accordance with the approved plan until written acceptance by the Commissioner of the Work of all subcontractors, including punch list Work, unless directed otherwise in writing by the Commissioner. The responsibility of the Contractor provided for herein is subject to the exception set forth in sub-section 3.5 A.2 (b) herein.
- b. Projects not involving enclosure of the building:
- 1) If the Project involves the installation of a new permanent heating system if one did not exist previously, or the replacement, modification, and/or shut down of the existing permanent heating system, or any key component thereof, the Contractor will be responsible for the provision of Temporary Heat, except as otherwise provided in sub-section 3.5 H.3(b).2 herein.
 - 2) If the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification, and/or shut down of the existing permanent heating system, or any key component thereof, there is no Contractor responsibility of the provision of Temporary Heat, unless otherwise specified in the Contract Documents. However, if the Commissioner, pursuant to sub-section 3.5 H.3 (b).1 herein, determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor will be responsible for the provision of Temporary Heat and must be paid for the same in accordance with sub-section 3.5 H.3 (b).1 herein.



B. ENCLOSURE OF STRUCTURES:

1. Notification: The Contractor must notify all its subcontractors and the Resident Engineer at least thirty (30) Days prior to the anticipated date that the building(s) will be enclosed.
2. Commissioner Determination: The Commissioner will determine whether the building, or any portion thereof, has been enclosed. As indicated in sub-section 3.5 A.2 above, once the building has been enclosed, the Contractor will be responsible for the provision of Temporary Heat. The Commissioner's determination with respect to building enclosure will be based upon all relevant facts and circumstances, including without limitation, 1) whether the building meets the criteria set forth in Paragraph 3 below, and 2) whether the openings in the building, such as doorways and windows, have been sufficiently covered so as to provide reasonable heat retention and protection from the elements.
3. Criteria for enclosure:
 - a. Roof Area:
 - 1) A building will be considered to be roofed when the area to be roofed is covered by a permanent structure and all openings through the permanent structure are covered and protected by temporary covers as described in Paragraph (c) below.
 - 2) Intermediate floor structures of multi-floor buildings will be considered to be roofed subject to the same requirements of the building roof.
 - 3) The final roofing system need not be in place for the building or structure to be determined to be enclosed, provided, however, all openings through the permanent structure covering the roof must be covered and protected by temporary covers, as described in Paragraph (c) below.
 - b. Walls: For the walls to be determined to be enclosed, permanent exterior wall elements or facing material must be in place and all openings must be covered and protected by temporary covers, as described in Paragraph (c) below.
 - c. Temporary Covers: In order to be acceptable, temporary covers must be securely fixed to prevent the entrance of rain, snow and direct wind. The minimum material requirements for temporary covers are as follows: 1) minimum ten (10) millimeter plastic, 2) minimum twelve (12) ounce waterproof canvas tarpaulins, or 3) a minimum three-eighths (3/8) inch thickness exterior grade plywood.
 - d. Temporary covers for openings will be the responsibility of the Contractor and such Work will be deemed included in the Contract price.

C. TEMPERATURE REQUIREMENTS:

1. Unoccupied Buildings: The temperature requirement for the provision of Temporary Heat in unoccupied buildings will be the GREATER of the following: 1) fifty (50) degrees Fahrenheit, or 2) the temperature requirement for the particular type of Work set forth in the Contract Documents.
2. Occupied Buildings: The temperature requirement for the provision of Temporary Heat in occupied buildings, or portions thereof, will be the GREATER of the following: 1) sixty-eight (68) degrees Fahrenheit, or 2) the temperature requirement for the particular type of Work set forth in the Contract Documents.

D. DURATION:

1. The Contractor must be required to provide Temporary Heat until Final Acceptance, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor must be responsible for the provision of Temporary Heat for the time specified herein, regardless of any delays in completion of the Project, including delays that



result in the commencement of the provision of Temporary Heat during a season that is later than that which may have been originally anticipated. The Contractor must include in its total Contract price all expenses in connection with the provision of Temporary Heat in accordance with the requirements specified herein.

2. The total Contract duration is set forth in Schedule A of the Addendum. The table set forth below indicates the number of full heating seasons that are deemed included in various Contract durations, which are specified in CCDs. At a minimum, a full heating season must extend from October 15th to April 15th.

<u>Contract Duration</u>	<u>Full Heating Seasons Required</u>
up to 360 CCD	1 full heating season
360 to 720 CCD	2 full heating seasons
more than 720 CCD	3 full heating seasons

E. METHOD OF TEMPORARY HEAT:

1. The method of temporary heat must be in conformance with the New York City Fire Code and with all applicable laws, rules, and regulations. Prior to implementation, such method must be subject to the written approval of the Commissioner.
2. The method of temporary heat must:
 - a. Not cause the deposition of dirt or smudges upon any finished Work or cause any defacement or discoloration to the finished Work.
 - b. Not be injurious or harmful to people or materials.
 - c. Portable fueled heating devices or equipment will NOT be allowed for use as temporary heat other than construction-related curing or drying in conformance with the NYC Fire Code.
3. No open fires will be permitted.

F. TEMPORARY HEATING SYSTEM:

1. The temporary system for the provision of Temporary Heat provided by the Contractor following enclosure of the building must be complete, including, subject to provisions of paragraph E above, boilers pumps, radiators, space heaters, water and heating piping, insulation and controls. The temporary system for the provision of Temporary Heat must be capable of maintaining the minimum temperature requirements set forth in Paragraph C above.

G. COORDINATION:

1. The Contractor, in the provision of Temporary Heat, must coordinate its operations in order to insure sufficient and timely performance of all required Work, including Work performed by trade subcontractors. The Contractor must supply and pay for all water required and used in the building for the operation of the heating system(s) for the purpose of Temporary Heat. The Contractor must include all expenses in connection with the supply of water for Temporary Heat in its total Contract price. During the period in which Temporary Heat in an enclosed building is being furnished and maintained, the Contractor must provide proper ventilating and drying, open and close the windows and other openings when necessary for the proper execution of the Work and when directed by DDC. The Contractor must maintain all permanent or temporary enclosures at its own expense.

H. USE OF PERMANENT HEATING SYSTEMS:

1. Use of Permanent Heating System for Temporary Heat after Building Enclosure:



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

- a. The Contractor must provide all labor and materials to promptly furnish and set all required equipment, convectors and/or radiators, piping, valves, fitting, etc., in ample time for their use for the provision of Temporary Heat after enclosure of the building.
 - b. New portions of the permanent heating system that are used for furnishing Temporary Heat must be left in near-perfect condition when delivered to the City for operation. Any repairs required, other than for ordinary wear and tear on the equipment, must be made by the Contractor at his/her expense. The starting date for the warranty or guarantee period for such equipment must be the date of Substantial Completion acceptance.
 - c. In the event that the Contractor does not advance the installation of the permanent heating system in sufficient time to permit its use for Temporary Heat as determined by DDC, the Contractor must furnish and install a separate system for the provision of Temporary Heat as required to maintain the minimum temperature requirements set forth in Paragraph C above.
2. All equipment for the system for the provision of Temporary Heat must be placed so as to comply with the requirements specified hereinbefore, and must be connected, disconnected and suitably supported and located so as to permit construction Work, including finish Work such as wall plastering and painting, to proceed. The installation of the system for the provision of Temporary Heat by the Contractor, including the placing of ancillary system equipment, must be coordinated with the operations of all trade subcontractors so as to insure sufficient and timely performance of the Work. Once the permanent heating system is operating properly, the Contractor must remove all portions of the system for Temporary Heat not part of the permanent heating system.
3. Temporary Heat Allowance for Special Conditions or and/or Unforeseen Circumstances:
- a. The City may establish an Allowance in the Contract for payment of costs and expenses in connection with the provision of Temporary Heat as set forth herein. If established, the City will include an amount for such Allowance on the Bid Form, and the Contractor must include such Allowance amount in its total Contract price. The Contractor will only be entitled to payment from this Allowance under the conditions and in accordance with the requirements set forth below. In the event this Allowance or any portion thereof remains unexpended at the conclusion of the Contract, such Allowance must remain the sole property of the City. Should the amount of the Allowance be insufficient to provide payment for the expenses specified below, the City will increase the amount of the Allowance.
 - b. The Allowance set forth herein may be utilized only under the conditions set forth below.
 1. In the event the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification, and/or shut down of the existing permanent heating system, or any key component thereof, and the Commissioner determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor must be responsible for the provision of Temporary Heat, as directed by the Commissioner. The City must pay such Contractor for all costs for labor, material, and equipment necessary and required for the same. Payment must be made in accordance with Article 26 of the Contract, except that the cost of fuel must be as set forth in Paragraph (c) below.
 2. In the event the Commissioner determines that there is a need for maintenance of the permanent heating system by the Contractor after Final Acceptance by the Commissioner of the Work, and that the need for such maintenance is not the fault of the Contractor, the Contractor must provide the required maintenance of the permanent heating system for the period of time directed by the Commissioner. The City will pay the Contractor for the cost of direct labor and fuel necessary and required in connection with such maintenance, excluding the cost of any foremen or other supervision. Payment must be made in accordance with Article 26 of the Contract, except that the cost of fuel must be as set forth in Paragraph (c) below.



- c. Payment for Fuel Costs: Payment from the Allowance set forth herein for the cost of fuel necessary and required to operate the system for the provision of Temporary Heat, or to maintain the permanent heating system under the conditions set forth in Paragraph b above, must be limited to the direct cost of such fuel. The Contractor will not be entitled to any overhead and/or profit for such fuel costs. In order to receive payment for such fuel costs, the Contractor must present original invoices for the same. DDC reserves the right to furnish the required fuel.

I. RELATED ELECTRICAL WORK:

- 1. The Contractor must be responsible for providing the items set forth below and must include all expenses in connection with such items in its total Contract price. The Contractor must provide such items promptly when required and must in all respects coordinate its Work with the Work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
 - a. The Contractor must provide all labor, materials, equipment and power necessary and required to furnish and maintain any temporary or permanent electrical connections to all equipment specified to be connected as part of the work of the Contractor's Contract.
 - b. The Contractor must supply and pay for all power necessary and required for the operation of the system for the provision of Temporary Heat and/or the permanent heating system used for Temporary Heat. Such power must be provided by the Contractor for the duration the Contractor is required to provide Temporary Heat, as set forth in sub-section 3.5 D herein.
- 2. In providing the items set forth in Paragraph 1 above, the Contractor is advised that labor may be required seven (7) days a week and/or during non-regular working hours for the period of time required by seasonal weather conditions.

J. RELATED PLUMBING WORK:

- 1. The Contractor must be responsible for providing all labor, materials, and equipment necessary and required to furnish and maintain all temporary or permanent connections to all equipment or plumbing outlets specified to be provided as part of the Work of this Contract. The Contractor must include all expenses in connection with such items of Work in its total Contract price. The Contractor must provide such items of Work promptly when required and must in all respects coordinate its Work with the Work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
- 2. In the event portions of the permanent plumbing equipment furnished by the Contractor as part of the Work of this Contract are used for the provision of Temporary Heat either during construction or prior to acceptance by the City of the complete plumbing system, the Contractor will be responsible to provide such plumbing equipment to the City in near-perfect condition and must make any repairs required, other than for ordinary wear and tear on the equipment, at the Contractor's expense. The starting date for warranty and/or guarantee period for such plumbing equipment must be the date of Substantial Completion by the City.
- 3. For Projects requiring the installation of new and/or modified gas service, as well as associated meter installations, the Contractor must promptly perform all required filings and coordination with the utility companies in order to expedite the installation, testing, and approval of the gas service and associated meter(s).

3.6 STORM WATER CONTROL, DEWATERING FACILITIES AND DRAINS:

A. PUMPING:

- 1. Comply with requirements of authorities having jurisdiction. Maintain Project Site, excavations, and construction free of water. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of storm water from heavy rainfall.



2. Contractor must furnish and install all necessary automatically operated pumps of adequate capacity with all required piping to run-off agencies, so as to maintain the excavation, cellar floor, pits and exterior depressions and excavations free from accumulated water during the entire period of construction and up to the date of Final Acceptance of Work of the Contract.
3. All pumps must be maintained at all times in proper working order.
4. Dispose of rainwater in a lawful manner that will not result in flooding the Project or adjoining properties nor endanger permanent Work or temporary facilities.
5. Remove snow and ice as required to minimize accumulations.

3.7 TEMPORARY FIELD OFFICE FOR CONTRACTOR:

- A. The Contractor must establish a temporary field office for its own use at the Site during the period of construction, at which readily available copies of all Contract Documents must be kept.
- B. The field office must be located where it will not interfere with the progress of any part of the Work or with visibility of traffic control devices.
- C. CONTRACTOR'S REPRESENTATIVE: There must be a responsible and competent representative of the Contractor in charge of the office who is duly authorized to receive orders and directions and to put them into effect.
- D. Arrangements must be made by the Contractor whereby its representative may be readily available by telephone.
- E. All temporary structures must be of substantial construction and neat appearance, and must be painted a uniform gray unless otherwise directed by the Commissioner.
- F. CONTRACTOR'S SIGN: The Contractor must post and keep posted on the outside of its field office, office, exterior fence, or wall at Site of Work, a legible sign giving the full name of the company, address of the company and telephone number(s) of responsible representative(s) of the firm who can be reached in the event of an emergency at any time.
- G. ADVERTISING PRIVILEGES: The City reserves the right to all advertising privileges. The Contractor must not cause any signs of any kind to be displayed at the Site unless specifically required herein or authorized by the Commissioner.

3.8 DDC FIELD OFFICE:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 A

- A. OFFICE SPACE IN EXISTING BUILDING:
 1. The Resident Engineer will arrange for office space for sole use in the building where Work is in progress. The Contractor must provide and install a lockset for the door to secure the equipment in the room. The Contractor must provide two (2) keys to the Resident Engineer. After completion of the Project the Contractor must replace the original lockset on the door and ensure its proper operation.
 2. In addition to equipment specified in sub-section 3.8 D, the Contractor must provide, for exclusive use of the DDC Field Office, the following:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two metal (2) lockers, single units, 15" x 18" x 78" overall including 6" legs. Lockers to have flat key locks with two (2) keys each, General Steel products or approved equal. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks, approximately 52"H x 28 ½"D x 18"W.



- b. One (1) 9000 B.T.U air conditioner or as directed by Commissioner. Wiring for the air conditioner must be minimum No. 12 AWG fed from individual circuits in the fuse box.
 - c. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - d. Two (2) metal wastebaskets.
 - e. One (1) fire extinguisher, one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - f. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the Project as required.
- 3. The Contractor must provide one (1) telephone, where directed and must pay all costs for telephone service for calls within the New York City limits for the duration of the Project.
 - 4. All furniture and equipment, except computer equipment specified in sub-section 3.8 D.3, must remain the property of the Contractor.
 - 5. Computer workstation quantities must be provided as specified in sub-section 3.8 B 3-a for DDC Managed Projects, or sub-section 3.8 B 3-b for CM Managed Projects.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 B

B. DDC FIELD OFFICE TRAILER:

- 1. **GENERAL:** The Contractor must, for the time frame specified herein, provide and maintain at its own cost and expense a DDC Construction Field Office and all related items as specified herein [hereinafter collectively referred to as the "DDC Field Office"] for the exclusive use of the Resident Engineer. The DDC Field Office must be located at the Project Site and must be solely dedicated to the Project. Provision of the DDC Field Office must commence within thirty (30) Days from Notice to Proceed (NTP) and must continue through forty-five (45) Days after Substantial Completion of the required construction at the Project Site. The Contractor must remove the DDC Field Office forty-five (45) Days after Substantial Completion of the required construction, or as otherwise directed in writing by the Commissioner.
- 2. **TRAILER:** The Contractor must provide at its own cost and expense a mobile office trailer for use as the DDC Field Office. The Contractor must install and connect all utility services to the trailer within thirty (30) Days from NTP. The trailer must have equipment in compliance with the minimum requirements hereinafter specified. Any permits and fees required for the installation and use of said trailer must be borne by the Contractor. The trailer including furniture and equipment therein, except computer equipment specified in sub-section 3.8D.3 herein, must remain the property of the Contractor.
- 3. Trailer must be an office-type trailer of the size specified herein, with exterior stairs at entrance. Trailer construction must be minimum 2 x 4 wall construction fully insulated with paneled interior walls, pre-finished gypsum board ceilings and vinyl tile floors.



**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8.B.3a or
SUB-SECTION 3.8.B.3b.**

- a. DDC Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 32 Feet
Overall width: 10 Feet
 - 2) Interior Layout:
Provide one (1) general office/conference room area and one (1) private office at one end of the trailer. Provide equipment and amenities as specified in sub-section 3.8.B herein.
 - 3) Computer Workstation: Provide one (1) complete computer workstation and one (1) tablet, as specified in sub-section 3.8.D herein, in the private office area as directed by the Resident Engineer.

- b. CM Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 50 Feet
Overall width: 10 Feet
 - 2) Interior Layout:

Provide one (1) large general office/conference room in the center of the trailer and two (2) private offices, one (1) each at either end of the trailer. Provide equipment and amenities as specified in sub-section 3.8.B herein.
 - 3) Computer Workstation:

Provide three (3) complete computer workstations and two (2) tablets as specified in sub-section 3.8.D herein. Provide one (1) each complete computer workstation in each private office and one (1) complete computer workstation at the secretarial position as directed by the Resident Engineer.

- 4. The exterior of the trailer must be lettered with black block lettering of the following heights with white borders:

CITY OF NEW YORK	2-1/2"
DEPARTMENT OF DESIGN AND CONSTRUCTION	3-3/4"
DIVISION OF PUBLIC BUILDINGS	3-1/2"
DDC FIELD OFFICE	2-1/2"

NOTE: In lieu of painting letters on the trailer, the Contractor may substitute a sign constructed of a good quality weatherproof material with the same type and size of lettering above.

- 5. All windows and doors must have aluminum insect screens. Provide wire mesh protective guards at all windows.

- 6. The interior must be divided by partitions into general and private office areas as specified herein. Provide a washroom located adjacent to the private office and a built-in wardrobe closet opposite the washroom. Provide a built-in desk in the private office(s) with fixed overhead shelf and clearance below for two (2) file cabinets.

- 7. Provide a built-in drafting or reference table, located in the general office/conference room, at least sixty (60) inches long by thirty-six (36) inches wide with cabinet below and wall type plan rack at least forty-two (42) inches wide.



Department of Design and Construction

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

8. The washroom must be equipped with a flush toilet, wash basin with two (2) faucets, medicine cabinet, complete with supplies and a toilet roll tissue holder. Plumbing and fixtures must be approved house type, with each appliance trapped and vented and a single discharge connection. Five (5) gallon capacity automatic electric heater for domestic hot water must be furnished.
9. HVAC: The trailer must be equipped with central heating and cooling adequate to maintain a temperature of seventy-two (72) degrees during the heating season and seventy-five (75) degrees during the cooling season when the outside temperature is five (5) degrees F. winter and eighty-nine (89) degrees F. summer.
10. Lighting must be provided via ceiling mounted fluorescent lighting fixtures to a minimum level of fifty (50) foot candles in the open and private office(s) along with sufficient lighting in the washroom. Broken and burned out lamps must be replaced by the Contractor. A minimum of four (4) duplex convenience outlets must be provided in the open office and two (2) each in the private office(s). These outlets must be in addition to special outlet requirements for computer stations, copiers, HVAC unit, etc.
11. Electrical service switch and panel must be adequately sized for the entire trailer load. Provide dedicated circuits for HVAC units, hot water heater, copiers and other equipment as required. All wiring and installation must conform to the New York City Electrical Code.
12. The following movable equipment must be furnished:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks and two (2) full ball bearing two (2) drawer vertical legal filing cabinets in each private office located below built-in desk.
 - b. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - c. Three (3) metal wastebaskets.
 - d. One (1) fire extinguisher one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - e. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the Contract as required.
13. TRAILER TEMPORARY SERVICE: Plumbing and electrical Work required for the trailer will be furnished and maintained as below.
 - a. PLUMBING WORK: The Contractor must provide temporary water and drainage service connections to the DDC Field Office trailer for a complete installation. Provide all necessary soil, waste, vent and drainage piping.

Contractor to frost-proof all water pipes to prevent freezing.

 - 1) REPAIRS, MAINTENANCE: The Contractor must provide repairs for the duration of the Project until the trailer is removed from the Site.
 - 2) DISPOSITION OF PLUMBING WORK: At the expiration of the time limit set forth in sub-section 3.8 B 1 herein, the temporary water and drainage connections and piping to the DDC Field Office trailer must be removed by the Contractor and must be plugged at the mains. All piping must become the property of the Contractor for plumbing Work and must be removed from the Site, all as directed. All repair Work due to these removals must be the responsibility of the Contractor.
 - b. ELECTRICAL WORK:
 - 1) The Contractor must furnish, install and maintain a temporary electric feeder to the



- DDC Field Office trailer immediately after it is placed at the job Site.
- 2) The temporary electrical feeder and service switch/fuse must be adequately sized based on the trailer load and installed per the New York City Electrical Code and complying with utility requirements.
 - 3) Make all arrangements and pay all costs to provide electric service.
 - 4) The Contractor must pay all costs for current consumed and for maintenance of the system in operating condition, including the furnishing of the necessary bulb replacements lamps, etc., for the duration of the Project and for a period of forty-five (45) Days after the date of Substantial Completion.
 - 5) Disposition of Electric Work: At the expiration of the time limit set forth, the temporary feeder, safety switch, etc., must be removed and disposed of as directed.
 - 6) All repair Work due to these removals must be the responsibility of the Contractor.
- c. MAINTENANCE:
- 1) The Contractor must provide and pay all costs for regular weekly janitor service and furnish toilet paper, sanitary seat covers, cloth towels and soap and maintain the DDC Field Office in first-class condition, including all repairs, until the trailer is removed from the Site.
 - 2) Supplies: The Contractor must be responsible for providing (1) all office supplies, including without limitation, pens, pencils, stationery, filtered drinking water and sanitary supplies, and (2) all supplies in connection with required computers and printers, including without limitation, an adequate supply of blank CD's/DVD's, storage boxes for blank CDs/DVDs, and paper and toner cartridges for the printer.
 - 3) Risk of Loss: The entire risk of loss with respect to the DDC Field Office and equipment must remain solely and completely with the Contractor. The Contractor must be responsible for the cost of any insurance coverage determined by the Contractor to be necessary for the field office.
 - 4) At forty-five (45) Days after the date of Substantial Completion, or sooner as directed by the Commissioner, the Contractor must have all services disconnected and capped to the satisfaction of the Commissioner. All repair Work due to these removals must be the responsibility of the Contractor.
- d. TELEPHONE SERVICE: The Contractor must provide and pay all costs for the following telephone services for the DDC Field Office trailer:
- 1) Separate telephone lines for one (1) desk phone in each private office.
 - 2) One (1) wall phone (with six (6) foot extension cord) at plan table.
 - 3) Separate telephone lines for the fax machine and internet access in each private office. Telephone service must include voice mail. All electronic voicemail messages must be automatically forwarded as email attachments, to allow for the voicemails to be played remotely.
 - 4) A remote bell located on outside of trailer
 - 5) The telephone service must continue until the trailer is removed from the Site.
- e. PERMITS: The Contractor must make the necessary arrangements and obtain all permits and pay all fees required for this Work.



- C. RENTED SPACE: The Contractor has the option of providing, at its cost and expense, rented office or store space in lieu of trailer. Said space must be in the immediate area of the Project and have adequate plumbing, heating and electrical facilities. Space chosen by the Contractor for the DDC Field Office must be approved by the Commissioner before the area is rented. All insurance, maintenance and equipment, including computer workstations specified in sub-section 3.8 D in quantities required as specified in sub-section 3.8 B 3 for the DDC Field Office trailer, must also apply to rented spaces.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 D

- D. ADDITIONAL EQUIPMENT FOR THE DDC FIELD OFFICE:
1. Photocopying Machine: Stand-alone, heavy duty, electric, dry-process color photocopying type with color scan and send capability via email, a minimum production rate of seventy (70) pages per minute and an adequate supply of copy paper, toner, etc. The machine must be capable of duplex copying paper sizes of 8-1/2 x 11 inches, 8-1/2 x 14 inches and 11 x 17 inches, and have separate trays for each paper size. It must have a document feeder, collator, stapler, and the capability to reduce/enlarge copies between each paper size. The supply of each size copy paper, toner, etc. must be replenished and the machines must be maintained for the duration of the Contract by the Contractor as required by the Resident Engineer. Make and model can be Minolta, Canon, IBM, Epson, or an approved equivalent, and must be networked to the office computers for printing capability. Copier must remain at job Site until the DDC Field office trailer is removed from the Site.
 2. The Contractor must furnish a fax machine and a telephone answering machine at commencement of the Project for the exclusive use of the DDC Field Office. All materials must be new, sealed in manufacturer's original packaging and must have manufacturers' warranties. All items must remain the property of the City of New York at the completion of the Project.
 3. COMPUTER WORKSTATION: The Contractor must provide one (1) complete computer workstation, in quantities specified in sub-section 3.8.B.3, as specified herein:
 - a. Hardware/Software Specification:
 - 1) Computer Equipment: Computers must be provided for all Contracts that have a total Consecutive Calendar Days (CCD) for construction duration, as set forth in Schedule "A", of 180 CCD's or greater. Contracts of lesser duration must not require computers.
 - 2) Computers furnished by the Contractor for use by City Personnel for the duration of the Contract must be in accordance with the Specific Requirements contained herein, must remain the property of the City of New York at the completion of the Project, and must meet the following minimum requirements:
 - 3) Personal Computers – Personal Computers must meet the requirements of the US General Services Administration (GSA) Government-Wide Strategic Solutions (GSS) Standard Laptop, Desktop, and Tablet Specifications, V7. (Available online at <https://hallways.cap.gsa.gov/>)
 - (a) Computer type for Personal Computers to be "Desktop Small Form Factor."
Computer type for tablet to be "Tablet"
 - (b) The following components listed as optional in the GSA specification must be provided with each personal computer: monitor, speakers, optical drive, smart card reader, webcam, and headset.
 - (c) The following additional software must be provided with licenses for each computer:
 1. Adobe Acrobat Pro DC or Bluebeam Revu
 2. Microsoft Office Professional
 3. Autodesk AutoCAD LT
 4. Anti-virus software



- 5. Microsoft Visio (only one license required per field office)
- 4) DDC Field Office Specs: DDC Field Offices requiring computers must be provided with the following:
 - a) One (1) broad-band internet service account. See table below for minimum required upload and download speeds. Telephone service should be bundled together with Internet connectivity. Because of throughput requirements Verizon FIOS is the preferred connectivity provider where available.

Office Personnel #	Download Speeds (Minimum)	Upload Speeds (Minimum)
1 – 5	10 Mbps	15 Mbps
6 – 10	20 Mbps	15 Mbps
11 – 15	25 Mbps	15 Mbps
16 – 20	50 Mbps	15 Mbps

This account will be active for the life of the Project. The e-mail name for the account must be the DDC Field Office/Project ID (preferably Gmail or Outlook e.g. ABC1234@gmail.com).

- b) One (1) 600 DPI HP Color Laser Jet Printer (twelve (12) pages per minute or faster) with one (1) Extra Paper (Legal Size) (Not required if photocopying machine prints in color).
- c) All necessary cabling for equipment specified herein
- d) Storage Boxes for Blank CD's
- e) Printer Table
- f) UPS/Surge Suppressor combo
- g) Ten (10) USB Thumb (or Flash) Drives – sixteen (16) GB each
- 5) All computers required for use in the DDC Field Office must be delivered, installed, and setup in the Field Office by the Contractor.
- 6) All Computer Hardware must come with a three (3) year warranty for on-site repair or replacement. Additionally, and notwithstanding any terms of the warranty to the contrary, the Contractor is responsible for rectifying all computer problems or equipment failures within one (1) business day.
- 7) An adequate supply of blank CDs/DVDs, and paper and toner cartridges for the printer must be provided by the Contractor and must be replenished by the Contractor as required by the Resident Engineer.
- 8) It is the Contractor's responsibility to ensure that electrical service and phone connections are also available at all times; that is, the Field Office Computer(s) is to be powered and turned on twenty-four (24) hours each Day.
- 9) Broadband connectivity is preferred at each field office location. Please take into consideration that an extra phone line dedicated to the modem must be ordered as part of the Contract unless Internet broadband connectivity, via Cable or DSL, is available at the planned field office location. Any questions regarding this policy should be directed



to the Assistant Commissioner of ITS at 718-391-1761.

E. HEAD PROTECTION (HARD HATS):

1. The Contractor must provide a minimum of ten (10) standard protective helmets for the exclusive use of DDC personnel and their visitors. Helmets must be turned over to the Resident Engineer and kept in the DDC Field Office.
2. Upon completion of the Project, the helmets must become the property of the Contractor.

3.9 MATERIAL SHEDS:

- A. Material sheds used by the Contractor for the storage of its materials must be kept at locations which will not interfere at any time with the progress of any part of the Work or with visibility of traffic control devices.
- B. The Contractor must store combustible materials apart from the facility.

3.10 TEMPORARY ENCLOSURES:

- A. The Contractor must provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weather tight enclosure for building exterior.
- B. Where heating or cooling is needed and Permanent Enclosure is not complete, the Contractor must insulate temporary enclosures.

3.11 TEMPORARY PARTITIONS:

- A. The Contractor must provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate occupied tenant areas from fumes and noise, including, but without limitation:
 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant plywood on construction operations side.
 2. Construct dustproof partitions with 2 layers of 3-mil (0.07-mm) polyethylene sheet on each side. Cover floor with two (2) layers of 3-mil (0.07-mm) polyethylene sheet, extending sheets eighteen (18) inches (460 mm) up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant plywood.
 - a. Construct vestibule and airlock at each entrance through temporary partition with not less than forty-eight (48) inches (1219 mm) between doors. Maintain water-dampened foot mats in vestibule.
 3. Insulate partitions to provide noise protection to occupied areas.
 4. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
 5. Protect air-handling equipment.
 6. Weather strip openings.
 7. Provide walk-off mats at each entrance through temporary partition.

3.12 TEMPORARY FIRE PROTECTION:

- A. The Contractor must install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with National Fire Protection Association (NFPA) Standard 241.
- B. Smoking in all areas is prohibited.



- C. The Contractor must supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
- D. The Contractor must develop and supervise an overall fire-prevention and protection program for personnel at Project Site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- E. The Contractor must provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 WORK FENCE ENCLOSURE:

- A. The Contractor must furnish, erect and maintain a wood construction or chain-link fence to the extent shown on the Contract Drawings or required by the Work enclosing the entire Project on all sides. All materials used must be new. Any permit required for the installation and use of said fence and costs must be borne by the Contractor.
- B. WOOD FENCE must be seven (7) feet high with framing construction of yellow pine, using 4" x 4" approved preservative-treated posts on not more than 6'-0" centers, with three (3) rails of at least 2" x 4" size to which must be secured minimum 1/2 inch thick exterior grade plywood. Posts must be firmly fixed in the ground at least 30" and thoroughly braced. Top edge of fence must be trimmed with a rabbeted edge mould. Provide on the street traffic sides of fence, observation openings as directed.
 - 1. GATES: The Contractor must provide an adequate number of double gates, complete with hardware, located as approved by the Resident Engineer. Double gates must have a total clear opening of 14'-0" with two (2) 7'-0" hinged swinging sections. Hanging posts must be 6" x 6" and must extend high enough to receive and be provided with tension or sag rods for the swinging sections.
 - 2. PAINTING: The fence and gates must be entirely painted on the street and public sides with one (1) coat of exterior primer and one (1) top coat of exterior grade acrylic-latex emulsion paint. Black stenciled signs reading "POST NO BILLS" must be painted on fence with three (3) inch high letters on twenty-five (25) foot spacing for the entire length of fence on street traffic sides. Signs must be stenciled five (5) feet above the sidewalk.
- C. CHAIN-LINK FENCING must be minimum two (2) inch thick, galvanized steel, chain-link fabric fencing; eight (8) feet high with galvanized steel pipe posts; minimum 2-3/8-inch Outside Diameter (OD) line posts and 2-7/8-inch OD corner and pull posts, with 1-5/8-inch OD top and bottom rails. Fence must be accurately aligned and plumb, adequately braced and complete with gates, locks and hardware as required. Under no condition must fencing be attached or anchored to existing construction or trees.
- D. ADDITIONAL REQUIREMENTS:
 - 1. It must be the obligation of the Contractor to remove all posters, advertising signs, and markings, etc., immediately.
 - 2. Should the fencing be required to be relocated during the course of the Contract, it must be done by the Contractor at no additional cost to the City.
 - 3. Where sidewalks are used for "drive over" purposes for Contractor vehicles, a suitable wood mat or pad must be provided for protection of sidewalks and curbs.
 - 4. Where required, make provision for fire hydrants, lampposts, etc.
- E. REMOVAL: When directed by the Resident Engineer, the fence must be removed.



3.14 RODENT AND INSECT CONTROL:

- A. DESCRIPTION: The Contractor must provide all labor, materials, plant and equipment, and incidentals required to survey and monitor rodent activity and to control any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the Project area. Special attention should be paid to the following conditions or areas:
 - 1. Wet areas within the Project area, including all temporary structures.
 - 2. All exterior and interior temporary toilet structures within the Project area.
 - 3. All Field Offices and shanties within the Project area of all subcontractors and DDC.
 - 4. Wherever there is evidence of food waste and/or discarded food or drink containers, in quantity, that would cause breeding of rodents or the insects herein specified.
 - 5. Any other portion of the Site requiring such special attention.
- B. MATERIALS:
 - 1. All materials must be approved by the New York State Department of Environmental Conservation (DEC) and comply with the New York City Health Code, OSHA and the laws, ordinances and regulations of state and federal agencies pertaining to such chemical and/or materials.
- C. PERSONNEL:
 - 1. All pest control personnel must be supervised by an exterminator licensed in categories 7A and 8.
- D. METHODS:
 - 1. Application and dosage of all materials must be done in strict compliance with the manufacturer's recommendations.
 - 2. Any unsanitary conditions, such as uncollected garbage or debris, resulting from all Contractor's activities, which will provide food and shelter to the resident rodent population must be corrected by the Contractor immediately after notification of such condition by the Resident Engineer.
- E. RODENT CONTROL WORK:
 - 1. In wetlands, woodlands, and areas adjacent to a stream, special precautions must be taken to protect water quality and to ensure the safety of other wildlife. To prevent poisoned bait from entering streams, no poisoned bait must be used in areas within seventy-five (75) feet of all stream banks. Live traps must be used in these seventy-five (75) foot buffer zone areas and within wetland and woodland areas.
 - 2. In areas outside the seventy-five (75) foot zone of protection adjacent to streams, and in areas outside wetlands and woodlands, tamper proof bait stations with poisoned bait must be placed during the period of construction and any consumed or decomposed bait must be replenished as directed.
 - 3. At least one (1) month prior to initiation of the construction Work, and periodically thereafter, live traps and/or rodenticide bait in tamper proof bait stations, as directed above, must be placed at locations that do not allow access to pets, human beings, children and other non-target species, particularly wildlife (for example-birds) in the Project area.
 - 4. The Contractor must be responsible for collecting and disposing of all trapped and poisoned rodents found in live traps and tamper-proof bait stations. The Contractor must also be responsible for posting and maintaining signs announcing the baiting of each particular location.
 - 5. The Contractor must be responsible for the immediate collection and disposal of any visible rodent remains found on streets or sidewalks within the Project area.



6. It is anticipated that public complaints will be addressed to the Commissioner. The Contractor, where directed by the Commissioner, must take appropriate actions, like baiting, trapping, proofing, etc., to remedy the source of complaint within the next six (6) hours of normal working time which is defined herein for the purposes of this section as 7 A.M. to 6 P.M. on Mondays through Saturdays.
7. Emergency service during the regular workday hours (Monday through Friday) must be rendered within twenty-four (24) hours, if requested by the Commissioner, at no additional cost to the City.

F. EDUCATION & NOTICES:

1. The Contractor must post notices on all Construction Bulletin Boards advising workers, employees, and residents to call the DDC Field Office to report any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the Project area. The Contractor must provide and distribute literature pertaining to Integrated Pest Management (IPM) techniques of rodent control to affected businesses and superintendents of nearby residential buildings to ensure their participation in maintaining their establishments free of unsanitary conditions, harborage removal and rodent proofing.
2. Prior to application of any chemicals, the Contractor must furnish to the Commissioner copies or sample labels for each pesticide, antidote information, and Material Data Safety Sheets (MSDS) for each chemical used.

G. RECORDS

1. The Contractor must keep a record of all rodent and waterbug infestation surveys conducted and make available, upon request, to the Commissioner. The findings of each survey must include, but not be limited to, recommended IPM techniques, like baiting, trapping, proofing, etc., proposed for rodent and waterbug pest control.
2. The Contractor must maintain records of all locations baited along with the type and quantity of rodenticide and insecticide bait used.

3.15 PLANT PEST CONTROL REQUIREMENTS AND TREE PROTECTION REQUIREMENTS:

- A. Plant Pest Control Requirements: The Contractor and its subcontractors, including the Certified Arborist described below, must comply with all federal and New York State laws and regulations concerning Asian Longhorned Beetle (ALB) management, including protocols for ALB eradication and containment promulgated by the New York State Department of Agriculture and Markets (NYSDAM). The Contractor is referred to: (1) Part 139 of Title 1 NYCRR, Agriculture and Markets Law, Sections 18, 164 and 167, as amended, and (2) State Administrative Procedure Act, Section 202, as amended.
1. All tree Work performed within the quarantine areas must be performed by NYSDAM certified entities. Transportation of all host material, living, dead, cut or fallen, inclusive of nursery stock, logs, green lumber, stumps, roots, branches and debris of a half inch or more in diameter from the quarantine areas is prohibited unless the Contractor or its subcontractor performing tree Work has entered into a compliance agreement with NYSDAM. The terms of said compliance agreement must be strictly complied with. Any host material so removed must be delivered to a facility approved by NYSDAM. For the purpose of this Contract, host material must be ALL species of trees.
 2. Any host material that is infested with the ALB must be immediately reported to NYSDAM for inspection and subsequent removal by either State or City contracts, at no cost to the Contractor.
 3. Prior to commencement of tree Work, the Contractor must submit to the Commissioner a copy of a valid ALB compliance agreement entered into with NYSDAM and the Contractor or its subcontractor performing tree Work. If any host material is transported from the quarantine area the Contractor must immediately provide the Commissioner with a copy of the New York State 'Statement of Origin and Disposition' and a copy of the receipt issued by the NYSDAM approved facility to which the host materials are transported.



4. Quarantine areas, for the purpose of this Contract, must be defined as all five boroughs of the City of New York. In addition, prior to the start of any tree Work, the Contractor must contact the NYC Department of Parks & Recreation's (DPR) Director of Landscape Management at (718) 699-6724, to determine the limits of any additional quarantine areas that may be in effect at the time when tree Work is to be performed. The quarantine area may be expanded by federal and state authorities at any time and the Contractor is required to abide by any revisions to the quarantine legislation while working on this Contract. For further information please contact: NYSDAM (631) 288-1751.
- B. Tree Protection Requirements: The Contractor must retain a Certified Arborist, as defined by DPR regulations, to provide the services described below.
1. Surveys and Reports: The Certified Arborist must, at the times indicated below, conduct a survey and prepare a plant material assessment report which includes: (1) identification, by species and pertinent measurements, of all plant material located on the Project Site, or in proximity to the Project Site, as described below, including all trees, significant shrubs and/or planting masses; (2) identification and plan for the containment of plant pests and pathogens, including the ALB, as described in paragraph A above; and (3) evaluation of the general health and condition of any infected plant material.
 2. Frequency of Reports: The Certified Arborist must conduct a survey and provide a plant material assessment report at two (2) points in time: (1) prior to the commencement of construction Work; and (2) at the time of Substantial Completion. In addition, for projects exceeding twenty-four (24) months in duration, the Certified Arborist must conduct a survey and prepare a report at the midpoint of construction. Copies of each plant material assessment report must be submitted to the Resident Engineer within two (2) weeks of the survey.
 3. Proximity to Project Site: Off-site trees, significant shrubs and/or planting masses must be considered to be located in proximity to the Project Site under the circumstances described below.
 - a. The tree trunk, significant shrub, or primary cluster of stems in a planting mass is within fifty (50) feet of the project's Contract Limit Lines (CLLs) or Property Lines (PLs).
 - b. Any part of the tree or shrub stands within fifty (50) feet of: (a) a path for Site access for vehicles and/or construction equipment; or (b) scaffolding to be erected for construction activity, including façade remediation projects.
 - c. The Certified Arborist determines that the critical root zone (CRZ) of an off-site tree, significant shrub, or primary cluster of stems in a planting mass extends into the Project Site, whether or not that plant material is located within the fifty (50) foot inclusionary perimeter as outlined above.
 4. Tree Protection Plan: The Certified Arborist must prepare, and the Contractor must implement, a Tree Protection Plan for all trees that may be affected by any construction Work, excavation or demolition activities, including without limitation: (1) on-site trees, (2) street trees, as defined below, (3) trees under DPR jurisdiction as determined by the NYC Department of Transportation, and (4) all trees that are located in proximity to the Project Site, as defined above. The Tree Protection Plan must comply with the DPR rules, regulations and specifications. The Contractor is referred to Chapter 5 of Title 56 of the Official Compilation of the Rules of the City of New York. Copies of the Tree Protection Plan must be submitted to the Resident Engineer prior to the commencement of construction. Implementation of the Tree Protection Plan for street trees and trees under DPR jurisdiction must be in addition to any tree protection requirements specified or required for the Project Site. For the purpose of this article, a "street tree" means the following: (1) a tree that stands in a sidewalk, whether paved or unpaved, between the curb lines or lateral lines of a roadway and the adjacent property lines of the Project Site, or (2) a tree that stands in a sidewalk and is located within fifty (50) feet of the intersection of the Project's Site's PL with the street frontage property line.



- C. No Separate Payment: No separate payment must be made for compliance with Plant Pest Control Requirements or Tree Protection Requirements. The cost of compliance with Plant Pest Control Requirements and Tree Protection Requirements must be deemed included in the Contractor’s bid for the Project.

3.16 PROJECT IDENTIFICATION SIGNAGE:

- A. The Contractor must provide, install and maintain Project identification and other signs where indicated to inform public and individuals seeking entrance to the Project.
- B. In order to properly convey notice to persons entering upon a City construction Site, the Contractor must furnish and install a sign at the entrance (gates) as follows:

**NO TRESPASSING
AUTHORIZED PERSONNEL ONLY**

- C. If no construction fence exists at the Site, this notice must be conveyed by incorporating the above language into safety materials (barriers, tape, and signs).
- D. Provide temporary, directional signs for construction personnel and visitors.
- E. Maintain and touch up signs so that they are legible at all times.

3.17 PROJECT CONSTRUCTION SIGN AND RENDERING:

- A. PROJECT SIGN:
 1. Responsibility: The Contractor must produce and install one (1) Project sign which must be posted and maintained upon the Project Site at a place and in a position directed by the Commissioner. The Contractor must protect the sign from damage during the continuance of Work under the Contract and must do all patching of lettering, painting and bracing thereof necessary to maintain the sign in first class condition and in proper position. Prior to fabrication, the Contractor must submit an 8-1/2” x 11” color match print proof from the sign manufacturer of the completed sign for approval by the Commissioner.
 2. Sign Quality: The Contractor must provide all materials required for the production of the sign as specified herein. Workmanship must be of the best quality, free from defects and must be produced in a timely manner.
 3. Schedule: Upon Project mobilization, the Contractor must commence production and installation of the sign.
 4. Removal: At the completion of all Work under the Contract, the Contractor must remove and dispose of the Project sign away from the Site.
 5. Sign construction:
 - a. Frame: The frame must be from quality dressed 2”x2” pine, fire retardant, pressure treated lumber, that surrounds the inside back edge of the sign. The sign must have one (1) intermediate vertical and two (2) diagonal supports, glued and screwed for rigidity. Frame must be painted white with two (2) coats of exterior enamel paint, prior to mounting of sign panel.
 - b. Edging: U-shaped, twenty-two (22) gauge aluminum edging, with a white enameled finish to match sign background, must run around entire edging of sign panel and frame. Corners must be mitered for a tight fit. Channel dimensions must be 1” inch (overlap to sign panel face) x 1



3/4" (or as required across frame depth) x 1" (back overlap).

- c. Sign Panel: 4' x 8' panel must be constructed in one (1) piece of fourteen (14) gauge (.0785") 6061-T6 aluminum. This panel must be pre-finished both sides with a glossy white baked-on enamel finish and be flush with edge of 2" x 2" wood frame. Samples must be submitted for approval.
 - d. Fastening: Fasten sign panel to wood frame using cadmium plated no. 8 sheet metal screws at 1/2" below edge of panel and 8" on center. The U-shaped aluminum channel must be applied over the wood frame edge and fastened with cadmium plated no. 8 sheet metal screws at 12" on center around the entire perimeter.
6. Sign Graphics:
- a. A digital file of the Project sign will be provided to the Contractor by the Commissioner's representative for printing. The Commissioner's representative must insert the Project name and names and titles of personnel (three (3) or more) and any other required information associated with the Project. All signs may include a second panel for a Project rendering as described in sub-section 3.17.B herein.
 - b. The digital file must be reproduced at the Sign Panel size of 4' x 8' on 3M High Performance Vinyl or approved equal. The 3M High Performance Vinyl or equivalent must be guaranteed for nine (9) years. Guarantee must cover fading, peeling, chipping or cracking. The sign manufacturer is required to maintain all specified Pantone Matching System (PMS) type and other composition elements represented in the digital file of the Project sign.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.17 B

B. PROJECT RENDERING:

- 1. Responsibility: In addition to the Project sign, the Contractor must furnish and install one (1) sign showing a rendering of the Project. A digital file of the Project rendering will be provided to the Contractor by the Commissioner's representative. From an approved image file provided by DDC, the Project rendering is to be sized, printed, and mounted in an identical manner as described in sub-section 3.17.A above for the Project sign. A color match print proof from the sign manufacturer of the rendering sign printed from the supplied file is to be submitted to DDC for approval before fabrication. The rendering sign is to be posted at the same height as the Project sign. Where possible, the rendering sign must be mounted with a perfect match of the short sides of the rectangle so that the rendering sign and the Project sign together will create one long rectangle.
- 2. Removal: At the completion of all Work under the Contract, the Contractor must remove and dispose of the Project rendering away from the Site.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.18

3.18 SECURITY GUARDS/FIRE GUARDS ON SITE:

A. SECURITY GUARDS (WATCHMEN):

- 1. The Contractor must provide a competent security guard service on the Site, beginning on the date on which the Contractor commences actual construction Work, or on such earlier date on which there is activity at the Site related to the Work, including without limitation, delivery of materials or construction set-up. The Contractor must continue to provide such security guard service until the date on which it completes all required Work at the Site, including all punch list Work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. Throughout the specified time period, there must be no less than one (1) security guard on duty every day, including Saturdays, Sunday and holidays, twenty-four (24) hours a day, except between the hours of 8:00 A.M. and 4:00 P.M. on any day which is a regular working day for a majority of the trade



subcontractors. This exception during the working day must not apply after the finishing painting of the plaster Work is commenced; thereafter, not less than one (1) security guard must be on duty continuously, twenty-four (24) hours a day.

2. Every security guard must be required to hold a "Certificate of Fitness" issued by FDNY. Every security guard must, during his/her tour of duty, perform the duties of fire guard in addition to his/her security obligations.
 3. Should the Commissioner find that any security guard is unsatisfactory, such guard must be replaced by the Contractor upon the written demand of the Commissioner.
 4. Each security guard furnished by the Contractor must be instructed by the Contractor to include in his/her duties the entire construction Site including the Field Office, temporary structures, and equipment, materials, etc.
 5. Should the Contractor or any other subcontractor consider the security requirements outlined above inadequate, the Contractor must provide such additional security as it thinks necessary, after obtaining the written consent of the Commissioner. The additional cost of such approved increased protection will be paid by the Contractor.
 6. Nothing contained in this sub-section must diminish in any way the responsibility of the Contractor and each subcontractor for its own Work, materials, tools, equipment, nor for any of the other risks and obligations outlined hereinbefore in this Article.
- B. **COSTS:** The Contractor must employ security guards/fire guards throughout the specified time period, except as otherwise modified by the detailed Specifications and as approved by the Commissioner, for the purpose of safeguarding and protecting the Site. All costs for security guards/fire guards must be borne by the Contractor.
- C. **RESPONSIBILITY:** The Contractor and its subcontractors will be responsible for safeguarding and protecting their own work, materials, tools and equipment.

3.19 SAFETY:

- A. The Contractor, in compliance with requirements of Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES, must provide and maintain all necessary temporary closures, guard rails, and barricades to adequately protect all workers and the public from possible injury. Any removal of these items, during the progress of the Work, must be replaced by the Contractor at no additional cost to the City.

END OF SECTION 01 50 00



**SECTION 01 54 11
TEMPORARY ELEVATORS AND HOISTS**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Temporary Use, Operation and Maintenance of Elevators during Construction
 - a. For new buildings up to and including fifteen (15) stories
 - b. For new buildings over fifteen (15) stories
 - c. For existing buildings
 - 2. Temporary Construction Hoists and Hoistways (For Material and Personnel)

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 50 00 TEMPORARY FACILITIES AND CONTROLS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.1

3.1 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDINGS UP TO AND INCLUDING FIFTEEN (15) STORIES:

- A. **INSTALLATION:** The Contractor must install, complete, operate, and maintain in good working order, as indicated herein, one (1) selected main elevator for the transport of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction of Work at the Project. The Contractor must furnish, install, and maintain such elevator in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevator and all equipment and/or parts utilized in connection therewith must be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.
- B. **RESPONSIBILITY:** The Contractor must be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.
- C. **COSTS:** The Contractor must be responsible for all costs in connection with the temporary elevator, including without limitation:



1. Installing and operating the temporary elevator;
2. Maintaining the temporary elevator in clean and proper operating condition, including the cost of lubricants and/or parts for such maintenance;
3. Performing all Work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevator;
4. Replacing the temporary elevator or any equipment or parts utilized in connection therewith, if required, due to damage, destruction, or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below;
5. Performing all required electrical Work in connection with the temporary elevator;
6. Providing all electric power required to operate the temporary elevator;
7. Providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevator; and
8. Providing all labor for the operation and maintenance of the temporary elevator, including on an overtime basis if necessary.

The total Contract price must include all costs in connection with the temporary elevator, including without limitation, the costs specified herein.

- D. **COMMENCEMENT OF SERVICE:** The Contractor must begin to provide temporary elevator service using the selected main passenger elevator no later than eight (8) weeks (forty (40) Days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (fifteen (15) Days) after the machine room roof slab has been placed, or that portion of it surrounding the elevator shaft, the following Work must be completed:
1. The shaft must be completely enclosed by either a permanent or temporary enclosure meeting all building code requirements.
 2. The machine room must be completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, must be provided to enable the safe and practicable hoisting of the elevator machinery for installation.
 3. On all floors at the shaft way entrances to the elevator, the Contractor must install solid substantial frames, either sliding or swing doors with substantial hardware and door locks, and any necessary approved wire mesh barricades for adjacent shaft ways.
 4. The Contractor must furnish and install solid, substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at the top of car and a substantial temporary door or gate on the front of the elevator entrance.
- E. **ELECTRICAL INSTALLATION:** The Contractor, no later than twenty (20) Days after the machine room roof slab or that portion of it surrounding the elevator has been placed, must furnish and install temporary or permanent power and light feeders as required for the elevator used for temporary service. Additionally, the Contractor must connect such feeders to the terminals on the starter panels or controllers in the machine room to the low voltage transformers and car light outlets in the center of the shaft way and for the car control and signal traveling cables. The Contractor must make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- F. **REMOVAL:** As directed by the Commissioner and when elevators for permanent use have been installed and are in proper condition for service, the Contractor must remove the temporary enclosures and all temporary elevator equipment and promptly proceed with the installation of the permanent equipment as required under the Contract.



- G. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment must be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection deems it necessary, the Contractor must furnish and install new governor and compensating ropes, traveling cables, controller parts, etc. The car and counterweight safeties must be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes must be installed and payment will be made in accordance with Article 26 of the Contract.
- H. **REPLACEMENT:** The Contractor must furnish and install new equipment or parts for any equipment or parts of the temporary elevator installation that have been damaged, destroyed, or that indicate excessive wear or corrosion, except for the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators must be thoroughly cleaned. Where lubricated rails are used they must be washed down. If roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., must be borne by the Contractor except for the replacement of hoisting ropes.
- I. **LIMITATIONS ON USE:** The temporary elevator must not be used during its operation for the hoisting of materials or the removal of rubbish, but must be limited only to the transportation of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction of work at the Project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation. In the event of any damage to the temporary elevator, the Contractor must notify the Resident Engineer within twenty-four (24) hours after such damage has occurred. As indicated above, the Contractor must be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- J. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of one hundred dollars (\$100) per Day for each Day it fails to provide the temporary elevator service described in this section beginning with the forty-first (41st) Day after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDING OVER FIFTEEN (15) STORIES:

- A. **INSTALLATION:** The Contractor must install, complete, operate, and maintain in good working order, as indicated herein, two (2) selected main elevators for the transport of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction of work at the Project. The Contractor must furnish, install, and maintain such elevators in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation, and maintenance of the temporary elevators and all equipment and/or parts utilized in connection therewith must be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use. The two (2) elevators must not be operated simultaneously.
- B. **RESPONSIBILITY:** The Contractor must be responsible for any injury to persons or damage to property arising out of the temporary elevators and all equipment and/or parts utilized in connection therewith.
- C. **COSTS:** The Contractor must be responsible for all costs in connection with the temporary elevators, including without limitation:
 - 1. Installing and operating the temporary elevators;



2. Maintaining the temporary elevators in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance;
3. Performing all Work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevators;
4. Replacing the temporary elevators or any equipment or parts utilized in connection therewith, if required due to damage, destruction, or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below;
5. Performing all required electrical Work in connection with the temporary elevators;
6. Providing all electric power required to operate the temporary elevators;
7. Providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevators; and
8. Providing all labor for the operation and maintenance of the temporary elevators, including on an overtime basis if necessary.

The total Contract price must include all costs in connection with the temporary elevators, including without limitation, the costs specified herein.

- D. **LOW RISE ELEVATOR:** The Contractor must begin to provide temporary elevator service using one (1) selected main passenger elevator no later than six (6) weeks (thirty (30) Days) after the twelfth (12th) floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. No later than one (1) week, (five (5) Days), after the twelfth (12th) floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped, the following Work must have been completed:
1. The shaft must be completely enclosed up to the twelfth (12th) floor by either the permanent or a temporary enclosure meeting the requirements of the law.
 2. A temporary machine room enclosure must be provided at the eleventh (11th) floor and must be completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, must be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. The Contractor must install on all floors up to and including the ninth (9th) floor at the shaft entrances to the elevator, solid substantial wood frames, either sliding or swing doors with substantial hardware and door locks, and any necessary approved wire mesh barricades for adjacent shaft ways.
 4. The Contractor must furnish and install solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, except that the portion of the front at the elevator entrance must be provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor must, no later than ten (10) Days after the twelfth (12th) floor slab or that portion of it surrounding the elevator has been poured and stripped, furnish and install temporary or permanent power and light feeders as required for the elevator used for temporary service. The Contractor must connect such feeders to the terminals on the starter panels or controllers in the temporary machine room to the low voltage transformers, car light outlets in the center of the shaftway, and for the car control and signal traveling cables. The Contractor must make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- F. **HIGH RISE ELEVATOR:** The Contractor must begin to provide temporary elevator service to all floors using a selected main passenger elevator no later than eight (8) weeks (forty (40) Days) after the machine room roof slab, or that portion of it surrounding the elevator shaft has been placed. No later than three (3) weeks (fifteen (15) Days) after the machine room roof slab, or that portion of it surrounding the elevator shaft has been placed, the following Work must have been completed:
1. The shaft must be completely enclosed by either the permanent or temporary enclosure, meeting the



requirements of the law.

2. The machine room must be completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, must be provided to enable the safe and practicable hoisting of the elevator machinery for installation.
 3. The Contractor must install on all floors at the shaft way entrances to the elevator solid substantial frames, either sliding or swing doors with substantial hardware and door locks, and any necessary approved wire mesh barricades for adjacent shaft ways.
 4. The Contractor must furnish and install solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, except that the portion of the front at the elevator entrance must be provided with a substantial temporary door or gate.
- G. **ELECTRICAL INSTALLATION:** The Contractor must, not later than twenty (20) Days after the machine room slab or that portion of it surrounding the elevator shaft has been placed, furnish and install temporary or permanent power and light feeders as required for the high-rise elevator to be used for temporary service. The Contractor must connect such feeders to the terminals on the motor-generator starter panels, or controllers in the machine room, to the signal circuits low voltage transformers for the annunciators and car light outlets in the center of shaft way. The Contractor must make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- H. When the high-rise elevator is completed and ready for temporary operation, the low-rise temporary elevator must be shut down.
- I. **REMOVAL:** When directed by the Commissioner and one (1) or more elevators for permanent use have been installed and are in condition for service, the Contractor must remove the temporary enclosures, all temporary elevator equipment, and promptly proceed with the installation of the permanent equipment as required under the Contract.
- J. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment must be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection determines it necessary, the Contractor must furnish and install new governor and compensating ropes, new traveling cables, new controller parts, etc. The car and counterweight safeties must be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes must be installed and payment will be made in accordance with Article 26 of the Contract.
- K. **REPLACEMENT:** The Contractor must furnish and install new equipment or parts for any equipment or parts of the temporary elevator installations that have been damaged, destroyed, or that indicate excessive wear or corrosion, except the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheaves spaces used for temporary operation of elevators must be thoroughly cleaned down. Where lubricated rails are used they must be washed down; if roller guides are used, all rust, dirt, etc., must be removed from the rails. The full cost of parts replacement cleaning, etc., must be borne by the Contractor except for the replacement of hoisting ropes.
- L. **LIMITATIONS ON USE:** The temporary elevators must not be used during their operation for the hoisting of materials or the removal of rubbish, but must be limited only to the transportation of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction of Work at the Project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor must notify the Resident Engineer within twenty-four (24) hours after such damage has occurred. As indicated above, the Contractor must be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.



- M. LIQUIDATED DAMAGES: The Contractor will be charged at the rate of one hundred dollars (\$100) per Day for each Day it fails to provide the temporary elevator service described in this Section beginning with the thirty-first (31st) Day after the twelfth (12th) floor slab, or that portion of the twelfth (12th) floor slab surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR EXISTING BUILDINGS:

- A. The Contractor may use, at the Commissioner's discretion, one (1) selected elevator in the building for temporary operation by the Contractor for the transportation of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction over the Work at the Project. The operation of the temporary elevator and all equipment and/or parts utilized in connection therewith must be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.
- B. RESPONSIBILITY: The Contractor must be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.
- C. REPLACEMENT: The Contractor must furnish and install new equipment or parts for any equipment or parts of the elevator for temporary operation that have been damaged, destroyed, or that indicate excessive wear or corrosion, except the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators must be thoroughly cleaned down. Where lubricated rails are used they must be washed down, if roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., must be borne by the Contractor except for the replacement of hoisting ropes. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes must be installed and payment will be made in accordance with Article 26 of the Contract.
- D. LIMITATIONS ON USE: The temporary elevator must not be used during its operation for the hoisting of materials or the removal of rubbish, but must be limited only to the transportation of employees of the Contractor and/or its subcontractors, representatives of DDC, and other governmental agencies having jurisdiction of Work at the Project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation. In the event of any damage to the temporary elevator, the Contractor must notify the Resident Engineer within twenty-four (24) hours after such damage has occurred. As indicated above, the Contractor must be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- E. LIQUIDATED DAMAGES: The Contractor will be charged at the rate of one hundred dollars (\$100) per Day for each Day it fails to provide elevator services described in this section beginning with fifteen (15) Days from Notice to Proceed (NTP). This charge will be deducted from any amount due and owing to the Contractor.

3.4 TEMPORARY HOISTS AND HOISTWAYS (FOR MATERIAL AND PERSONNEL):

- A. RESPONSIBILITY: The Contractor must provide adequate numbers of material hoists for the most expeditious performance of all parts of the Work including the Work of all its subcontractors.
- B. LOCATIONS: No hoists must be constructed at such locations as to interfere with, or affect the construction of, floor arches or the Work of subcontractors. The hoists may be located at the exterior sides of the structure or in the courtyard and extend upward adjacent to the line of window openings. The hoists must be located a sufficient distance from the exterior walls and be so protected as to prevent any of the permanent Work from being damaged, stained or marred.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

- C. ELEVATOR SHAFT: Wherever possible, one or more of the permanent elevator shafts may be used as temporary hoistways, providing such use complies with the requirements of the Building Code of the City of New York, has been approved by the Commissioner, and does not interfere with the progress of the Work.
- D. PROTECTION FOR INTERIOR HOISTS: All interior material hoistways must be enclosed on each floor and must be adequately protected with appropriate safety guards. In no event must the protection be less than that required by law.

END OF SECTION 01 54 11



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 54 23
TEMPORARY SCAFFOLDING AND PLATFORMS**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. SECTION 01 35 26 SAFETY REQUIREMENTS PROCEDURES.
- C. The Contractor must comply with the requirements of “*The City of New York Department of Design and Construction Safety Requirements*”. This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Temporary Scaffolding and Platforms, including:
 - 1. Conformance
 - 2. Responsibility
 - 3. Jobsite Documentation and Submittals
 - 4. Inspections
- B. This Section governs ALL scaffold used on DDC Project site(s), including but not limited to, Suspended Scaffold, Supported Scaffold, and Sidewalk Sheds.

1.3 CONFORMANCE:

- A. Unless otherwise indicated, the Contractor is responsible for providing, erecting, installing, and maintaining all temporary scaffolding and platforms which must comply with requirements of Chapter 33 (Safeguards During Construction or Demolition) of the New York City (NYC) Building Code, NYC Local Law 52 of 2005, OSHA Construction Standard 1926 Subpart L, and furnishing the items and personnel set forth in this Section.

1.4 RESPONSIBILITY:

- A. Jobsite Safety Coordinator: The Contractor must designate and employ a Jobsite Safety Coordinator, who must be a competent person, who must have a daily presence on the Project site during scaffold use. This designee must possess and maintain a valid New York City Department of Buildings (DOB) supported scaffold certificate of completion. An alternate must also be designated in the event that the Jobsite Safety Coordinator is absent. The Jobsite Safety Coordinator must:
 - 1. Verify completeness of documentation and submittals (as described below);
 - 2. Verify that inspections are performed, including pull tests (see below), reports are filed and reported deficiencies are corrected;
 - 3. Monitor trades using scaffold;
 - 4. Limit access to scaffold areas that are tagged for non-use;
 - 5. Inform trades of scaffold load limitations;
 - 6. Monitor loading of decks;
 - 7. Verify that any ties that are temporarily removed are properly restored in the same shift;
 - 8. Verify that outriggers and planks that are moved are properly set up and secured;
 - 9. Verify that all scaffold decks in use have proper access/egress;
 - 10. Verify that all open sides of decks in excess of 14 inches have proper guardrails and toe-boards;



11. Notify appropriate parties, including but not limited to the Resident Engineer, Site Safety Coordinator / Monitor, Site Safety consultant, scaffold users, Contractor and the Scaffold Engineer, of misuses, non-conformances, hazards and accidents; and,
 12. Keep a log of significant actions and events connected with the scaffolding.
- B. The Contractor will be responsible for erecting, maintaining, and dismantling the scaffolding and/or sidewalk shed in conformance with requirements of the NYC Building Code, OSHA and the Contract Documents, including the Specifications. The Contractor must also be guided by generally accepted standards of scaffold industry practice as promulgated by the Scaffold Industry Association.
- C. The Contractor must require the subcontractor responsible for erecting the scaffolding to engage a Scaffold Engineer, licensed as a professional engineer by the State of New York. The Scaffold Engineer will be responsible to ensure the following: (1) that the installation design is in compliance with requirements of the NYC Building Code and OSHA, (2) that the design comports with the capabilities of the components and the characteristics of the site, (3) that scaffold loads on the host building, including netting, have been properly considered, and (4) that the design documents provide accurate information for erectors and users.
- D. Scaffold users are trade contractors assigned to work on the scaffold. Training certificates from a DOB-approved training provider are mandatory. These users have a duty to become familiar with the NYC Building Code and OSHA requirements germane to users, to obey the instructions of the Jobsite Safety Coordinator, and to inform the Jobsite Safety Coordinator of known hazards, non-conformances, or violations.

1.5 JOBSITE DOCUMENTATION AND SUBMITTALS:

The Contractor must prepare, obtain, and submit the following to the Resident Engineer:

- A. NYC DOB permit(s) for scaffold and sidewalk sheds (as applicable) including filing applications signed and sealed by a Professional Engineer licensed in the State of New York;
- B. Site logistics plan / site safety plan;
- C. Installation drawing(s), design, and product data to be provided for **all** scaffold(s) and shed(s) must include, at a minimum:
 1. Plan(s);
 2. Elevation(s);
 3. Duty load designation: "standard" (150 psf live load) or "heavy duty" (300 psf live load);
 4. Details including base support, anchors and ties;
 5. Notes and specifications including load limits, number of planked levels, tie spacing, netting, and sequence of installation and removal;
 6. Anchorage into sound material;
 7. Load limits based on pull tests;
 8. Specifications for pull test(s), method, proof load and the number of trials;
 9. Elevations, levels or heights, where anchorage is made into masonry;
 10. Specifications for frames, planks, screw jacks, anchors, and any other ancillary hardware;
 11. Samples for anchors, ties and netting;
 12. Sequence of operations for erection and demolition;
 13. Location plan, heights, widths, "jumps" over doorways and driveways;
 14. Specify size, maximum span and maximum spacing of headers and stringers;
 15. Specify legs, girts, braces, nailing and connections; and,
 16. All sidewalk sheds must be designed, engineered, signed, and sealed by a Professional Engineer licensed in the State of New York;
 - a. Generic (not job-specific) engineering drawings are satisfactory for standard sheds and arrangements.



- b. Special engineering is required for custom sheds, site-specific problems or non-standard arrangements.

1.6 INSPECTIONS:

- A. Signed inspection reports must be issued for each inspection and pull-test below, and must be logged and maintained on site by the Jobsite Safety Coordinator for the duration of the Project.
- B. Pull testing will be required during design, and during or post erection, where anchorage is made into masonry. The Scaffold Engineer must specify the test method, proof load, and the number of trials.
- C. Sidewalk sheds must be inspected after initial installation, major modification, or damage and thence every three months. Inspections must be by a Scaffold Engineer for custom sheds and by a Competent Person employed by the Contractor for standard sheds.
- D. Scaffolds must be inspected by the Scaffold Engineer during erection, post-erection, and prior to use and thence every three (3) months. The Scaffold Engineer must repeat inspections after major alteration/ modification, and/or damage.
- E. A Qualified Person assigned by the Contractor must inspect: the progress of erection and dismantling; and, the condition and integrity of the sidewalk sheds after high winds, major storms, and at least once per month during usage.
- F. A Qualified Person assigned by the Contractor must inspect: the progress of erection and dismantling at least weekly; and, the condition and integrity of the scaffold after high winds, major storms, and at least once per month during usage.
- G. Scaffolds and Sidewalk Sheds must be inspected daily by the Jobsite Safety Coordinator or alternate, prior to use by scaffold users. The inspection results must be recorded in the maintenance log and must always be available on-site.
- H. At the completion of the Project, submit all inspection documents as Miscellaneous Record Documents in accordance with SECTION 01 78 39 CONTRACT RECORD DOCUMENTS.

1.7 LADDERS AND STAIRS:

- A. The Contractor must provide and maintain ladders or temporary stairs extending from the street to the first story, and to and from every floor and roof level of the Project.

1.8 ACCESS AND EXITS:

- A. The ladders or temporary stairs must be of acceptable size, number and location, so that proper and convenient access may be had by those required to proceed to and from all parts of the Project.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 54 23



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 60 00
PRODUCT REQUIREMENTS**

PART I – GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.3 RELATED SECTIONS:

- A. Section 01 42 00 REFERENCES for applicable industry standards for products specified.

1.4 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
 - 3. Comparable Product: Product that is demonstrated and approved by Commissioner through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. In addition to the basis-of-design product description, product attributes and characteristics are listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification.



- C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure.

1.5 ACTION SUBMITTALS

- A. Product Specification Submittals: Comply with requirements in Section 01 33 00 SUBMITTAL PROCEDURES. Show compliance with requirements.
- B. Comparable Product Request Submittal: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
 - 2. Review Action: If necessary, Commissioner will request additional information or documentation for evaluation and will notify Contractor of approval or rejection of proposed comparable product request.
 - a. Format of Approval of Submittal: Per Article 1.6 of Section 01 33 00 SUBMITTAL PROCEDURES.
 - b. Use product specified, or products by Manufacturers specified if Commissioner does not issue a decision on use of a comparable product request.

1.6 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
- B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.
 - 1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is not conspicuous.
 - 2. Equipment Nameplates: Provide a permanent nameplate on each item of service-connected or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:
 - a. Name of product and manufacturer.
 - b. Model and serial number.
 - c. Capacity.
 - d. Speed.
 - e. Ratings.
 - 3. See individual identification sections in Divisions 21, 22, 23, and 26 for additional identification requirements.



1.7 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
 - 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 - 2. Coordinate delivery with installation time to ensure minimum holding time for items that are easily damaged, or sensitive to deterioration, theft, and other losses.
 - 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 - 4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.
- C. Storage:
 - 1. Store products to allow for inspection and measurement of quantity or counting of units.
 - 2. Store materials in a manner that will not endanger Project structure.
 - 3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
 - 4. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
 - 5. Protect stored products from damage and liquids from freezing.

1.8 PRODUCT WARRANTIES

- A. Warranties specified in other Sections will be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of Guaranty obligations under requirements of the Contract Documents.
 - 1. **Manufacturer's Warranty:** Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to the City of New York.
 - 2. **Special Warranty:** Written warranty required by the Contract Documents to provide specific rights for the City of New York.
- B. **Special Warranties:** Prepare a written document that contains appropriate terms and identification, ready for execution.
 - 1. **Manufacturer's Standard Form:** Modified to include Project-specific information and properly executed.
 - 2. **Specified Form:** When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
 - 3. See other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. **Submittal Time:** Comply with requirements in Section 01 77 00 CLOSEOUT PROCEDURES.



PART II – PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
 - 1. Descriptive, performance, and reference standard requirements in the Specifications establish required characteristics of products.
 - 2. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 - 3. Commissioner will review and approve products with warranties meeting the requirements of the Contract Documents.
 - 4. Where products are accompanied by the term "as selected," Commissioner will make selection.

- B. Or Approved Equal:
 - 1. Comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product, or for use of a product by an unnamed Manufacturer, as designated by the term "Or approved equal".
 - 2. Submit additional documentation required by Commissioner, in order to establish equivalency of proposed products. Evaluation of "Or approved equal" product status is by the Commissioner, whose determination is final.

- C. Product Selection Procedures:
 - 1. Products: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products will be considered. Comply with requirements in "Comparable Products" Article for consideration of a product by an unnamed manufacturer. Products' listing is indicated by the following:
 - a. Products: Subject to compliance with requirements, provide one of the following:
 - 1) Manufacturer; Product designation
 - 2) Manufacturer; Product designation
 - 3) Manufacturer; Product designation
 - 4) Or approved equal

 - 2. Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed. Comparable products from unnamed Manufacturers will be considered. Comply with requirements in "Comparable Products" Article for consideration of a product by an unnamed manufacturer. Manufacturer's listing is indicated by the following:
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Manufacturer
 - 2) Manufacturer
 - 3) Manufacturer
 - 4) Or approved equal



3. Basis-of-Design Product: Where Specifications name a basis-of-design product, provide the specified product, or a comparable product by one of the other named manufacturers. Drawings may indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Specifications indicate performance requirements and physical properties, durability and other special and required features that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers. Basis-of-Design Product listing is indicated by the following:
 - a. Subject to compliance with requirements, provide [product indicated on Drawings] [manufacturer's name; product name or designation] or comparable product by one of the following:
 - 1) Manufacturer
 - 2) Manufacturer
 - 3) Or approved equal
 4. Sole Source Product (Single Proprietary): Where Specifications name a single manufacturer and product, provide the named product. A Sole Source Product selection requires prior request by the Design Consultant and approval by the Commissioner for its inclusion in specifications. Sole Source Product is indicated by the following phrase listing:
 - a. Sole Source Product: Manufacturer's name and Product designation.
 - 1) No substitutions Permitted.
- D. Visual Matching Specification: Where Specifications require "match Commissioner's sample," provide a product that complies with requirements and matches Commissioner's sample. Commissioner's decision will be final on whether a proposed product matches.
- E. Visual Selection Specification: Where Specifications include the phrase "as selected by Commissioner from manufacturer's full range" or similar phrase, select a product that complies with requirements. Commissioner will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products (Or Approved Equal): Commissioner will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Commissioner may return requests without action, except to record noncompliance with these requirements:
- B. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant product qualities include attributes such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
- C. Evidence that proposed product provides specified warranty.
- D. List of similar installations for completed projects with project names and addresses and names and addresses of architects and Owners, if requested.
- E. Samples, if requested.



- F. Submittal Requirements: Approval by the Commissioner of Contractor's request for use of comparable product is not intended to satisfy other submittal requirements.
- G. Comply with all other specified product and submittal requirements.

PART III – EXECUTION (Not Used)

END OF SECTION 016000



**SECTION 01 60 00
PRODUCT REQUIREMENTS**

PART I – GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

1.3 RELATED SECTIONS:

- A. Section 01 42 00 REFERENCES for applicable industry standards for products specified.

1.4 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
 - 3. Comparable Product: Product that is demonstrated and approved by Commissioner through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. In addition to the basis-of-design product description, product attributes and characteristics are listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification.



- C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure.

1.5 ACTION SUBMITTALS

- A. Product Specification Submittals: Comply with requirements in Section 01 33 00 SUBMITTAL PROCEDURES. Show compliance with requirements.
- B. Comparable Product Request Submittal: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
 - 2. Review Action: If necessary, Commissioner will request additional information or documentation for evaluation and will notify the applicable Contractor of approval or rejection of proposed comparable product request.
 - a. Format of Approval of Submittal: Per Article 1.6 of Section 01 33 00 SUBMITTAL PROCEDURES.
 - b. Use product specified, or products by Manufacturers specified if Commissioner does not issue a decision on use of a comparable product request.

1.6 QUALITY ASSURANCE

- A. Compatibility of Options: If the applicable Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
- B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.
 - 1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is not conspicuous.
 - 2. Equipment Nameplates: Provide a permanent nameplate on each item of service-connected or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:
 - a. Name of product and manufacturer.
 - b. Model and serial number.
 - c. Capacity.
 - d. Speed.
 - e. Ratings.
 - 3. See individual identification sections in Divisions 21, 22, 23, and 26 for additional identification requirements.



1.7 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.
- B. Delivery and Handling:
 - 1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
 - 2. Coordinate delivery with installation time to ensure minimum holding time for items that are easily damaged, or sensitive to deterioration, theft, and other losses.
 - 3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
 - 4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.
- C. Storage:
 - 1. Store products to allow for inspection and measurement of quantity or counting of units.
 - 2. Store materials in a manner that will not endanger Project structure.
 - 3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
 - 4. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
 - 5. Protect stored products from damage and liquids from freezing.

1.8 PRODUCT WARRANTIES

- A. Warranties specified in other Sections will be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve the applicable Contractor of Guaranty obligations under requirements of the Contract Documents.
 - 1. **Manufacturer's Warranty:** Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to the City of New York.
 - 2. **Special Warranty:** Written warranty required by the Contract Documents to provide specific rights for the City of New York.
- B. **Special Warranties:** Prepare a written document that contains appropriate terms and identification, ready for execution.
 - 1. **Manufacturer's Standard Form:** Modified to include Project-specific information and properly executed.
 - 2. **Specified Form:** When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
 - 3. See other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. **Submittal Time:** Comply with requirements in Section 01 77 00 CLOSEOUT PROCEDURES.



PART II – PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
1. Descriptive, performance, and reference standard requirements in the Specifications establish required characteristics of products.
 2. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 3. Commissioner will review and approve products with warranties meeting the requirements of the Contract Documents.
 4. Where products are accompanied by the term "as selected," Commissioner will make selection.
- B. Or Approved Equal:
1. Comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product, or for use of a product by an unnamed Manufacturer, as designated by the term "Or approved equal".
 2. Submit additional documentation required by Commissioner, in order to establish equivalency of proposed products. Evaluation of "Or approved equal" product status is by the Commissioner, whose determination is final.
- C. Product Selection Procedures:
1. Products: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products will be considered. Comply with requirements in "Comparable Products" Article for consideration of a product by an unnamed manufacturer. Products' listing is indicated by the following:
 - a. Products: Subject to compliance with requirements, provide one of the following:
 - 1) Manufacturer; Product designation
 - 2) Manufacturer; Product designation
 - 3) Manufacturer; Product designation
 - 4) Or approved equal
 2. Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed. Comparable products from unnamed Manufacturers will be considered. Comply with requirements in "Comparable Products" Article for consideration of a product by an unnamed manufacturer. Manufacturer's listing is indicated by the following:
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Manufacturer
 - 2) Manufacturer
 - 3) Manufacturer
 - 4) Or approved equal



3. Basis-of-Design Product: Where Specifications name a basis-of-design product, provide the specified product, or a comparable product by one of the other named manufacturers. Drawings may indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Specifications indicate performance requirements and physical properties, durability and other special and required features that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers. Basis-of-Design Product listing is indicated by the following:
 - a. Subject to compliance with requirements, provide [product indicated on Drawings] [manufacturer's name; product name or designation] or comparable product by one of the following:
 - 1) Manufacturer
 - 2) Manufacturer
 - 3) Or approved equal
 4. Sole Source Product (Single Proprietary): Where Specifications name a single manufacturer and product, provide the named product. A Sole Source Product selection requires prior request by the Design Consultant and approval by the Commissioner for its inclusion in specifications. Sole Source Product is indicated by the following phrase listing:
 - a. Sole Source Product: Manufacturer's name and Product designation.
 - 1) No substitutions Permitted.
- D. Visual Matching Specification: Where Specifications require "match Commissioner's sample," provide a product that complies with requirements and matches Commissioner's sample. Commissioner's decision will be final on whether a proposed product matches.
- E. Visual Selection Specification: Where Specifications include the phrase "as selected by Commissioner from manufacturer's full range" or similar phrase, select a product that complies with requirements. Commissioner will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products (Or Approved Equal): Commissioner will consider the applicable Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Commissioner may return requests without action, except to record noncompliance with these requirements:
- B. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant product qualities include attributes such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
- C. Evidence that proposed product provides specified warranty.
- D. List of similar installations for completed projects with project names and addresses and names and addresses of architects and Owners, if requested.
- E. Samples, if requested.



- F. Submittal Requirements: Approval by the Commissioner of the applicable Contractor's request for use of comparable product is not intended to satisfy other submittal requirements.
- G. Comply with all other specified product and submittal requirements.

PART III – EXECUTION (Not Used)

END OF SECTION 016000



**SECTION 01 73 00
EXECUTION**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes general procedural requirements governing execution of the Work including without limitation the following:
 - 1. Delivery of Materials
 - 2. Contractor's Superintendent
 - 3. Surveys
 - 4. Borings
 - 5. Examination
 - 6. Environmental Assessment
 - 7. Preparation
 - 8. Deferred Construction
 - 9. Installation
 - 10. Permits
 - 11. Transportation
 - 12. Sleeves and Hangers
 - 13. Sleeve and Hanger Drawings
 - 14. Cutting and Patching
 - 15. Location of Partitions
 - 16. Furniture and Equipment
 - 17. Removal of Rubbish and Surplus Material
 - 18. Cleaning
 - 19. Security and Protection of Work Site
 - 20. Maintenance of Site and Adjoining Property
 - 21. Maintenance of Project Site
 - 22. Safety Precautions for Control Circuits
 - 23. Obstructions in Drainage Lines
 - 24. Payment for Allowances
 - 25. Correction of the Work

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 33 00 SUBMITTAL PROCEDURES
- D. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT & DISPOSAL
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS



1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Design Consultant	The entity responsible for providing design services for the Project, including, without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 QUALITY ASSURANCE:

- A. Land Surveyor Qualifications: A professional land surveyor who is licensed in the State of New York and who is experienced in providing land-surveying services of the kind indicated.

PART 1 - PRODUCTS (Not Used)

PART 2 - EXECUTION

3.1 DELIVERY OF MATERIALS:

- A. Material Orders: The Contractor must furnish to the Commissioner a copy of each material order, indicating date of order and quantity of material, and must also notify the Commissioner when materials have been delivered to the Site and in what quantities.
- B. Ample Quantities: The Contractor must deliver materials in ample quantities to ensure the most prompt and uninterrupted progress of the Work so as to complete the Work within the Contract time.
- C. Containers: The manufacturer's containers must be delivered with unbroken seals and must bear proper labels.
- D. Deliveries: The Contractor must coordinate deliveries in order to avoid delaying or impeding the progress of the Work.
- E. Handling: The Contractor must provide equipment and personnel to handle products by methods to prevent soiling or damage.
 - 1. Promptly inspect shipments to assure products comply with requirements, quantities are correct, and products are undamaged.
 - 2. Promptly return damaged shipments or incorrect orders to manufacturer.
 - 3. For materials or equipment to be reused or salvaged, use special care in removal, storage and reinstallation to insure proper function in completed Work.
- F. Storage: Store products in accordance with provisions of Article 3.1 of the Standard Construction Contract, and periodically inspect to assure that stored products are undamaged and are maintained under required conditions.
- G. Stacking: All materials must be properly stacked in convenient places adjacent to the Site, or where directed, and protected in a satisfactory manner. Stacked materials must be arranged so as to not interfere with visibility of traffic control devices.



- H. Overloading: If the Commissioner permits the storage of materials in any part of the Project area, they must be so stored as to cause no overloading.
- I. No Interference: If it becomes necessary to remove and restack materials to avoid impeding the progress of any part of the Work or interfering with the Work to be done by any trade subcontractor, the Contractor must remove and restack such materials at no additional cost to the City.

3.2 CONTRACTOR'S CONSTRUCTION SUPERINTENDENT:

- A. Contractor's Construction Superintendent: The Contractor must devote its time and personal attention to the Work and must employ and retain at the Project Site, from commencement until Final Acceptance, a Contractor's Construction Superintendent. The Contractor's Construction Superintendent must be registered with the New York City Department of Buildings (DOB) in compliance with the Construction Superintendent Rule of the City of New York, be competent and capable of maintaining proper supervision and care of the Work, and be acceptable to the Commissioner. The Construction Superintendent, in the absence of the Contractor, and irrespective of any superintendent or foreman employed by any subcontractor, must see that the instructions of the Commissioner are carried out.
- B. Replacement: The Contractor's Construction Superintendent on the job must not be changed or removed without the consent of the Commissioner.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 SURVEYS:

- A. Line and Grade: The City will establish a baseline and bench mark near the Site of the Work for use by the Contractor in connection with the performance of the Work.
- B. Responsibility: The Contractor must establish all other lines and elevations required for the Work and must be solely responsible for the accuracy thereof.
- C. Safeguard All Points: The Contractor must safeguard all points, stakes, grade marks and bench marks made or established by the Contractor on the Work. The Contractor must re-establish same if disturbed, and bear the entire expense of rectifying the Work if improperly installed due to not maintaining, protecting or removing without authorization from the Commissioner such established points, stakes, or marks.
- D. City Monuments and Markers: No Work must be performed near City monuments or markers so as to disturb them until the said monuments or markers have been referenced or reset or otherwise disposed of by the relevant Agency or party who installed them.
- E. Foundations: The Contractor must furnish certification from a licensed Surveyor that all portions of the foundation Work are located in accordance with the Contract Drawings and at the elevations required thereby. This certification must show the actual locations and the actual elevations of all the Work in relation to the locations and elevations shown on the Contract Drawings, including, but not restricted to the following:
 - 1. The locations and elevations of all piles, if any.
 - 2. Elevations of tops of all spread footings, tops of pile caps, and tops of all foundation walls, elevator pit walls and ramp walls.
 - 3. Location of all footing centers and pier centers including those for exterior wall columns.
 - 4. Location of all foundation walls including wall columns, elevator pit walls and ramp walls.
- F. Wall Lines: After the first courses of masonry or stone have been laid, the Contractor must establish the permanent lines of exterior walls. The Contractor must promptly furnish certification from a licensed Surveyor in the form of signed original drawings showing the exact location of such wall lines of all portions



of all structures. Except at its own risk, the Contractor must not proceed further with the erection of walls until the Surveyor's certification has been submitted and verified for correct location of wall lines.

- G. Surveyor: The Surveyor selected for any of the purposes mentioned in Paragraph E and Paragraph F above, and Paragraph I below, must be a land Surveyor licensed in the State of New York and must be subject to the approval of the Commissioner. The Surveyor must not be a regular employee of the Contractor, nor must the Surveyor have any interest in the Contract. The Surveyor's certification must represent an independent and disinterested verification of all layout. The Surveyor must report to the Department of Design and Construction's (DDC) Resident Engineer each time upon arrival to and departure from the Site and review with the Resident Engineer the data required for the Project.
- H. Final Certification: Final certification must be submitted upon completion of the Work or upon completion of any subdivision of the Work as directed by the Commissioner. Any exceptions or deviations from the Contract Drawings must be noted on the final certificate and must include any maps, plates, notes, pertinent documents and data necessary, in the opinion of the Commissioner, to constitute a full and complete report.
- I. Final Survey: The Contractor must submit to DDC for submission to DOB a final Survey by the licensed Surveyor showing the location of the new Work, before completion of the Work. This Survey must show the location of the first tier of beams or of the first floor; the finish grades of the open spaces on the plot; the established curb level and the location of all other Work on the plan, together with the location and boundaries of the lot or plot upon which the Work is constructed, curb cuts, all yard dimensions, etc.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 BORINGS:

- A. The work of this article must be the responsibility of the Contractor unless otherwise indicated.
- B. Reference Drawings: The boring drawings as listed on the title sheet are for information to the bidder and are to be used under the conditions as follows:
 - 1. Boring logs: shown on the boring drawings, record information obtained under engineering supervision in the course of exploration carried out by or under the direction of DDC at the Site.
 - 2. Soils and Rock Samples: All inferences are drawn from the indications observed as made by engineering and scientific personnel. All such inferences and all records of the Work, including soil samples and rock cores, if any, are available to bidders for inspection.
 - 3. Certification of Samples: The City certifies that the Work was carried out as stated, and that the soil samples and rock cores were actually taken from the site at the times, places, and in the manner indicated on the boring drawings. The samples are available for inspection in DDC's Subsurface Exploration Unit.
 - 4. Bidder's Responsibility: The bidder, however, is responsible for any conclusions to be drawn from the Work. If the bidder accepts those of the City, it must do so at its own risk. If the bidder prefers not to assume such risk, the bidder is under the obligation of employing its own experts to analyze the available information and must be responsible for any consequences of acting on their conclusions.
 - 5. Continuity Not Guarantee: The City does not guarantee continuity of conditions shown at actual boring locations over the entire Site. Where possible, borings are located to avoid all obstructions and previous construction which can be found by inspection of the surface. The bidder is required to estimate the influence of such features from its own inspection of the Site.



3.5 EXAMINATION:

- A. Existing Conditions: The existence and location of Site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning the Work, the Contractor must investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
 - 1. Before construction, the Contractor must verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground utilities and other construction indicated as existing are not guaranteed. Before beginning Site Work, the Contractor must investigate and verify the existence and location of underground utilities and other construction affecting the Work.
 - 1. Before construction, the Contractor must verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, water-service piping, and underground electrical services.
 - 2. The Contractor must furnish location data for Work related to the Project that must be performed by public utilities serving the Project Site.
- C. Acceptance of Conditions: Examine all existing substrates, areas, and conditions, with the subcontractor responsible for installation or application, for compliance with requirements for installation tolerances and other conditions affecting performance. The Contractor must record observations of these examinations:
 - 1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
 - 2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 3. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.6 ENVIRONMENTAL ASSESSMENTS:

- A. City Responsibilities: An Environmental Assessment and survey is performed by DDC and its findings are included in the Contract Documents. In accordance with the NYC Administrative Code Title 15 Chapter 1, an asbestos survey is required to be performed by an Asbestos Investigator certified by the NYC Department of Environmental Protection (DEP) to identify the presence of asbestos containing material (ACM) prior to any alteration, renovation, or demolition activity. The findings of such survey are required for the submission of approvals and permits issued by DOB. When the findings indicate that asbestos containing material is present and will be disturbed during the alteration, renovation, or demolition activity, then abatement design specifications will be incorporated into the Contract Documents. The Contractor must comply with all federal, state and local asbestos regulations affecting the work for this Contract.
- B. Contractor Responsibility: The Contractor must comply with all federal, state and local environmental regulations, including without limitation, United States Environmental Protection Agency (EPA) and Occupational Safety and Health Administration (OSHA) regulations, which require the Contractor to assess if lead-based paint will be disturbed during the Work in order to protect the Contractor's workers and the building occupants from migration of lead dust into the air. The Contractor must comply with all federal, state and local environmental waste disposal regulations which may be required during the Work. The Contractor is required to hire licensed abatement and disposal companies for the requisite Work.

3.7 PREPARATION:

- A. Field Measurements: The Contractor must verify all dimensions and conditions on the Site so that all Work will properly join the existing conditions.



- B. Before commencing the Work, the Contractor must examine all adjoining materials on which its Work is in any way dependent on good workmanship in accordance to the intent of the Specifications and the Contract Drawings. The Contractor must report to the Commissioner any condition that will prevent it from performing Work that conforms to the required Specifications.
- C. Existing Utility Information: The Contractor must furnish information to the Commissioner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Additionally, the Contractor must coordinate with authorities having jurisdiction.
- D. Space Requirements: The Contractor must verify space requirements and dimensions of items shown diagrammatically on the Contract Drawings.

3.8 DEFERRED CONSTRUCTION:

- A. In order to permit the installation of any item or items of equipment required to be furnished and installed within the time allowed for completing the Work of the Contract, the Contractor must defer construction Work limited to adequate areas as approved and certified by the Commissioner.
- B. The Contractor must confer with the affected trade subcontractors and ascertain arrangements, time, and facilities necessary to be made by the Contractor in order to execute the provisions specified herein.

3.9 INSTALLATION:

- A. General: The Contractor must locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical Work plumb and make horizontal Work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated on the Contract Drawings.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for Work specified to be factory-prepared and field-installed. Check shop drawings of other work and work of trade subcontractors to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by the Design Consultant.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral



anchors that are to be embedded in concrete or masonry. Deliver such items to Project Site in time for installation.

- H. Joints: Make joints of uniform width. Where joint locations in exposed Work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.10 PERMITS:

- A. The Contractor must comply with all local, state and federal laws, rules, and regulations affecting the Work of this Project, including, without limitation, (1) obtaining all necessary permits for the performance of the Work prior to commencement thereof, and (2) complying with all requirements for the disposal of demolition and/or construction debris, waste, etc., including disposal in City landfills. The Contractor must be responsible for all costs in connection with such regulatory compliance, unless otherwise specified in the Contract.

3.11 TRANSPORTATION:

- A. Availability: The Contractor must determine the availability of transportation facilities and dockage for the use of its employees, equipment, and materials, and the conditions under which such use will be permitted.
- B. Costs: If transportation facilities and dockage are available and are permitted to be used by the governmental agency having jurisdiction, the Contractor must pay all necessary costs and expenses, and abide by all rules and regulations promulgated in connection therewith.
- C. Vehicles: With respect to the use of vehicles on highways and bridges, the Contractor's attention is directed to the limitations set forth in the Rules of the City of New York, Title 34, Chapter 4, Section 4-15.
- D. Continued Use: It is understood that the Commissioner makes no warranty as to the continued use by the Contractor of such facilities.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.12

3.12 SLEEVES AND HANGERS:

- A. Coordinate with Progress Schedule: The Contractor must promptly furnish and install conduits, outlets, piping sleeves, boxes, inserts and all other materials and equipment that is to be built into the Work in conformity with the requirements of the Project.
- B. Cooperation of Subcontractors: All subcontractors must fully cooperate with each other in connection with the performance of the above Work as "cutting in" new work is neither contemplated nor will it be tolerated.
- C. Timeliness: To avoid delay, in the event that timely delivery of sleeves and other materials cannot be made, the Contractor may arrange to have boxes or other forms set at the locations where the piping or other material is to pass through or into the slabs, walls or other Work. Upon the subsequent installation of the sleeves or other material, the Contractor must fill around them with materials as required by the Contract. The necessary expenditures incurred for the boxing out and filling in must be borne by the Contractor.
- D. Inserts: The Contractor is to install strip inserts four (4) foot on center and perpendicular to beams in ceiling slabs of boiler, machine, and mechanical equipment rooms. Inserts are to be installed for strippable concrete slabs only.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 SLEEVE AND PENETRATION DRAWINGS:

- A. As soon as practicable after the commencement of Work, and when the order in which concrete for the first slabs, walls, etc. to be poured is determined, the Contractor must submit to DDC a sketch indicating the location and size of all penetrations for sleeves, ducts, etc. which will be required to accommodate the mechanical trades in order to determine if such penetrations will materially weaken the Project's structure.



The sketch must be stamped and returned if approved and/or comments will be transmitted. The Contractor must continue to submit sketches as the pouring schedule and the concrete Work progresses and until approvals for the penetration sketches have been given. The Contractor must not predicate its layout Work on unapproved sketches.

3.14 CUTTING AND PATCHING:

- A. Responsibility: The Contractor must do all cutting, patching, and restoration required by its Work, unless otherwise particularly specified in the Specifications.
- B. Restore Work: The Contractor must restore any Work damaged during the performance of the Work.
- C. Competent Workers: All restoration Work must be done to the satisfaction of the Commissioner by competent workers skilled in the trade required by such restoration. If, in the judgment of the Commissioner, workers engaged in restoration Work are incompetent, they must be replaced immediately by competent workers.
- D. Structural Elements: Do not cut and patch structural elements without the prior approval, in writing, of the Resident Engineer.
- E. Operational Elements: Do not cut and patch operating elements and related components.
- F. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in a manner that would, in the Commissioner's opinion, reduce the building's aesthetic qualities. The Contractor must remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- G. Existing Warranties: The Contractor must remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.
- H. Removals: The Contractor must remove from the premises all demolished materials of every nature or description resulting from cutting, patching, and restoration work, in accordance with the requirements hereinafter stipulated under Sub-Section 3.17 herein and as further required in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.15

3.15 LOCATION OF PARTITIONS:

- A. Within three (3) weeks after the concrete slabs have been poured on each floor level, the Contractor must immediately locate accurately all of the partitions, including the door openings, on the floor slabs in a manner approved by the Resident Engineer.

3.16 FURNITURE AND EQUIPMENT:

- A. Responsibility: The Contractor is responsible for moving all loose furniture and/or equipment in all areas where the location of such furniture and/or equipment interferes with the proper performance of its Work.
- B. Protection: All such furniture and/or equipment must be adequately protected with dust cloths and returned to their original locations when directed to do so by the Resident Engineer.

3.17 REMOVAL OF RUBBISH AND SURPLUS MATERIALS:

- A. Of the waste that is generated during demolition, as many of the waste materials as economically feasible must be reused, salvaged, or recycled. Waste disposal in landfills must be minimized. Comply with requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.



- B. Rubbish: Rubbish must not be thrown from the windows or other parts of the Project. Mason's rubbish, dirt and other dust-producing material must be wetted down periodically.
- C. Location: The Contractor must clean the Project Site and Work area daily, sweep up, and deposit at a location designated on each floor, all of its rubbish, debris, and waste materials as it accumulates or more frequently when directed by the Resident Engineer. Wood crating must be broken up, neatly bundled, tied, and stacked ready for removal and be deposited at a location designated on each floor.
 - 1. Comply with requirements in NYC Fire Department for removal of combustible waste materials and debris.
 - 2. Do not hold materials more than seven (7) Days during normal weather or three (3) Days if the temperature is expected to rise above 80 degrees F (27 degrees C).
 - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- D. Laborers: Since the Contractor is responsible for the removal of all rubbish, etc., from the Site, the Contractor must employ and keep engaged for this purpose an adequate number of laborers.
- E. Surplus Materials: The Contractor must remove from the Site all surplus materials when there is no further use for same.
- F. Tools and Materials: At the conclusion of the Work, all erection plant, tools, temporary structures and materials belonging to the Contractor must be promptly removed.
- G. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.

3.18 CLEANING:

- A. The Contractor must thoroughly clean all equipment and materials furnished and installed, and must deliver such materials and equipment undamaged in a clean and new appearing condition up to date of Final Acceptance.
- B. Site: Maintain Project Site free of waste materials and debris.
- C. Installed Work: Keep installed Work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of the product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- D. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- E. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration up to date of Final Acceptance.
- F. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration up to date of Final Acceptance.

3.19 SECURITY AND PROTECTION OF WORK SITE:

- A. Provide protection of installed Work, including appropriate protective coverings, and maintain conditions that ensure installed Work is without damage or deterioration up to date of Final Acceptance.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.
- C. Secure and protect Work and Work Site against damage, loss, injury, theft and/or vandalism.
- D. Maintain daily sign-in sheets of workers and visitors and make the sheets available to the Commissioner.



3.20 MAINTENANCE OF SITE AND ADJOINING PROPERTY:

- A. The Contractor must take over and maintain the Project Site, after order to start Work.
- B. The Contractor must be responsible for the safety of the adjoining property, including sidewalks, paving, fences, sewers, water, gas, electric and other mains, pipes and conduits etc. until the date of Final Acceptance. The Contractor must, at its own expense, except as otherwise specified, protect same and maintain them in at least as good a condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants must be kept clear at all times, maintained and repaired to serviceable condition with materials to match existing.
- D. Provide and keep in good repair all bridging and decking necessary to maintain vehicular and pedestrian traffic.
- E. The Contractor must also remove all snow and ice as it accumulates on the sidewalks within the Contract Limits Lines.

3.21 MAINTENANCE OF PROJECT SITE:

- A. The Contractor must take over and maintain all Project areas, after order to start Work.
- B. Until the date of Final Acceptance, the Contractor must be responsible for the safety of all Project areas, including water, gas, electric and other mains and pipes and conduits and must, at the Contractor's own expense, except as otherwise specified, protect same and maintain them in at least as good condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants must be kept clear at all times, maintained, and if damaged, repaired to serviceable conditions with materials to match existing.
- D. The Contractor must keep the space for the Resident Engineer in a clean condition.

3.22 SAFETY PRECAUTIONS FOR CONTROL CIRCUITS:

- A. Control circuits, the failure of which will cause a hazard to life and property, must comply with DOB Bureau of Electrical Control requirements.

3.23 OBSTRUCTIONS IN DRAINAGE LINES:

- A. The Contractor must be responsible for all obstructions occurring in all drainage lines, fittings, and fixtures after the installations and cleaning of these drainage lines, fittings, and fixtures, as certified by the Resident Engineer. Roof drains must be kept clear of any and all debris. Any stoppage must be repaired immediately at the expense of the Contractor.

3.24 PAYMENT OF ALLOWANCES:

- A. Unless otherwise called for in the Specifications, the following requirements apply to the payment and execution of Allowances established for the Contractor:
 - 1. Allowances are to be utilized when ordered and authorized in writing by the Commissioner.
 - 2. The Contractor will be paid on a time and materials (T&M) basis under the Allowance. Labor will be paid based on the Contractor's Certified Payrolls, all other expenses will be paid on an invoice basis. A markup of twelve percent (12%) for overhead and ten percent (10%) for profit will be allowed, except that no markup will be allowed on Payroll Taxes or on the premium portion of overtime pay or on sales and personal property taxes.



3.25 CORRECTION OF THE WORK

- A. Subject to the terms of the Contract, the Contractor must complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Contractor must repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
 - 3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
 - 4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION 01 73 00



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT AND
DISPOSAL**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and procedural requirements for the management and disposal of construction waste and includes the following requirements:
 - 1. Waste Management Goals
 - 2. Waste Management Plan
 - 3. Progress Reports
 - 4. Progress Meetings
 - 5. Management Plan Implementation
- B. This section includes:
 - 1. Definitions
 - 2. Waste Management Performance Requirements
 - 3. Reference Resources
 - 4. Submittals
 - 5. Quality Assurance
 - 6. Waste Plan Implementation
 - 7. Additional Demolition and Salvage Requirements
 - 8. Disposal

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 73 00 EXECUTION
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- G. Refer to the Addendum to identify whether this Project is designed to comply with a Certification Level according to the U.S. Green Building Council's LEED Rating System, as specified in Section 01 81 13.03 "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS" or Section 01 81 13.04 "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS".

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



<u>Term</u>	<u>Definition</u>
Alternative Daily Cover (ADC)	Material other than earthen material placed on the surface of the active face of a municipal solid Waste landfill at the end of each Work Day to control vectors, fires, odors, blowing litter and scavenging.
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the Design Consultant may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Clean	Untreated and unpainted; not contaminated with oils, solvents, caulk or the like.
Construction and Demolition (C&D) Waste	Solid Wastes typically including building materials, trash debris and rubble resulting from remodeling, repair and demolition operations. Hazardous materials and land clearing Waste are not included.
Diversion from Landfill	Material removal from the Site for Recycling, Reuse or Salvage that might otherwise be sent to a landfill.
Off-site Sorting	Material types that are combined on the project site and hauled away for sorting. Measured weights only. Approximations of weight or volume based on visual inspection are not acceptable. <ul style="list-style-type: none"> a. Off-site Sorting Method 1: Diversion Rate derived from the weight of the individual diverted material type divided by the weight of the commingled waste. Individual diverted material types handled through this sorting method are each counted as an individual diverted material type. b. Off-site Sorting Method 2: Diversion Rate derived from the waste sorting facility average diversion rate, multiplied by the weight of the commingled waste. All diverted materials handled through this sorting method are counted as a single diverted material type.
On-site Sorting	Material types that have been sorted in segregated containers or project areas for removal as segregated diverted material types. Measured weights only. Approximations of weight or volume based on visual inspection are not acceptable. <ul style="list-style-type: none"> a. On-site Sorting: Diversion Rate derived from the weight of the diverted material type. Material diverted through this sorting method are each counted as an individual diverted material type.
Recyclable	The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product.
Recycle (recycling)	To sort, separate, process, treat or reconstitute solid Waste and other discarded materials for the purpose of redirecting such materials into the manufacture of useful products. Recycling does not include burning, incinerating or thermally destroying Waste.
Return	To give back Reusable items or unused products to vendors.



Reuse	To reuse excess or discarded construction material in some manner on the Project Site.
Salvage	To remove a Waste material from the Project Site for resale or reuse.
Waste	Extra material or material that has reached the end of its useful life in its intended use. Waste includes Salvageable, Returnable, Recyclable and Reusable material.
Waste Management Plan	A Project-related plan for the collection, transportation and disposal of Waste generated at the construction Site. The purpose of the plan is to ultimately reduce the amount of material becoming landfill.
Waste-to-Energy	The conversion of non-Recyclable Waste materials into usable heat, electricity or fuel through a variety of processes, including combustion, gasification, pyrolization, anaerobic digestion and landfill gas recovery.

1.5 WASTE MANAGEMENT PERFORMANCE REQUIREMENTS:

- A. The City of New York has established that this Project must generate the least amount of Waste possible and employ processes that ensure the generation of as little Waste as possible due to error, inaccurate planning, breakage, mishandling, contamination, or other factors.
- B. Of the Waste that is generated during demolition, as many of the Waste materials as economically feasible, and as stated here, must be Reused, Salvaged, or Recycled. Waste disposal in landfills must be minimized.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.5 C

- C. LEED CERTIFICATION: The City of New York will seek Leadership in Energy and Environmental Design (LEED) certification for this Project as indicated in the Addendum to the General Conditions from the U.S. Green Building Council. The documentation required here will be used for this purpose. LEED awards points for a variety of sustainable design measures on a project, one of which is the Reuse and Recycling of project Waste.
- D. DIVERSION REQUIREMENTS. With the exception of LEED v4 projects with demolition ADC Waste, a minimum of seventy-five percent (75%) of total Project demolition and construction Waste (by weight) must be diverted from landfill through at least four (4) diverted material types. LEED v4 projects with demolition ADC Waste must divert a minimum of fifty percent (50%) of total Project demolition and construction Waste (by weight) from landfill through at least three (3) diverted material types. The following Waste categories are likely candidates to be included in the diversion plan as applicable for this Project:
 - 1. Concrete;
 - 2. Bricks;
 - 3. Concrete masonry units (CMU);
 - 4. Asphalt;
 - 5. Metals (e.g. banding, stud trim, ceiling grid, ductwork, piping, rebar, roofing, other trim, steel, iron, galvanized, stainless steel, aluminum, copper, zinc, brass, bronze);
 - 6. Clean dimensional wood;



7. Carpet and pad;
 8. Drywall;
 9. Ceiling tiles;
 10. Cardboard, paper and packaging; and
 11. Reuse items indicated on the Contract Drawings and/or elsewhere in the Specification.
- E. All fluorescent lamps, High Intensity Discharge lamps and mercury-containing thermostats removed from the Site must be Recycled. Do not use bulb crusher on Site.
- F. Recycling on the job, subject to the Commissioner's approval, is encouraged on the Site itself, such as the crushing and reuse of removed sound concrete and stone. Include these categories in the Waste Management Plan.
- G. Land-clearing debris is not considered construction, demolition or renovation Waste and is not to be included as contribution to Waste diversion.
- H. A minimum of five (5) material types, both structural and nonstructural, are to be identified in the Construction Waste Management Plan for diversion.
- I. For LEED v4 projects, material to be used as ADC does not qualify as material diverted from disposal.

1.6 REFERENCES, RESOURCES:

- A. DDC encourages its Contractors to seek information from websites and experts in Salvage or Recycling in order to minimize disposal costs. There are numerous opportunities to sell, Salvage, or to donate materials and accrue tax benefits (which would accrue to the Contractor responsible for removal); there are also outlets that will pick up, and in some cases, buy Recyclable materials. Examples of information resources are as follows:
1. A standard Construction and Demolition (C&D) Waste Management Log form is available through DDC's Sustainable Design website:
<https://www1.nyc.gov/assets/ddc/downloads/Sustainable/forms-local-law-86/waste-tracking-form.pdf>.
 2. Web Resources (information only; no warranty or endorsement is implied):
 - a. www1.nyc.gov/assets/donate/site/ – Website of donateNYC, a network of nonprofit organizations in New York City that accept and distribute second-hand and surplus goods.
 - b. www.bignyc.org – Website of Build It Green NYC, a non-profit outlet for Salvaged and surplus building materials.
 - c. www.usgbc.org – Website of the United States Green Building Council, with a description of the LEED certification process and requirements for C&D Waste Recycling.
 - d. www.epa.gov/smm/sustainable-management-construction-and-demolition-materials – Website of the U.S. Environmental Protection Agency (EPA) that discusses C&D Waste issues, and links to other resources.
 3. Waste-to-Energy Facilities that need to comply with European Standard (EN) for Waste management and emissions into air, soil, surface water and groundwater:
 - a. www.ec.europa.eu/environment/waste/framework/index.htm – European Commission Waste Framework Directive 2008/98/EC.
 - b. <https://eur-lex.europa.eu/homepage.html> - European Commission Waste



Incineration Directive 2000/76/EC.

- c. www.cen.eu/cen/Products – EN Standards 303-1, 303-2, 303-3, 303-4, 303-5, 303-6, 303-7.

1.7 SUBMITTALS:

- A. The Contractor must refer to Section 01 33 00 SUBMITTAL PROCEDURES for submittal requirements.
- B. The Contractor must be responsible for the development and implementation of a Waste Management Plan for the Project. The Contractor's subcontractors must assist in the development of that Plan, and collect and deposit their Waste and Recyclable materials in accordance with the approved Plan.
- C. Draft Waste Management Plan: Within fifteen (15) Days after receipt of the Notice to Proceed (NTP), or prior to any Waste removal, whichever occurs sooner, the Contractor must submit to the Commissioner a Draft Waste Management Plan. Include separate sections for C&D Waste. The Plan must demonstrate how the performance goals will be met, and contain the following:
1. List of material types targeted for Reuse, Salvage, or Recycling, and names, addresses, and phone numbers of receiving facilities/companies that will be purchasing or accepting each material. Each material listed is to include estimated amount in tons and percentage of overall construction waste of each of the material streams.
 2. Estimation of the percentage of overall construction waste that will be sent to landfill.
 3. Description of on-Site and/or off-Site sorting methods for all materials to be removed from Site. Off-site sorting methods must be categorized as Off-site Sorting Method 1 or Off-site Sorting Method 2.
 4. If mixed C&D Waste is to be sorted off-Site, provide a letter from the processor stating the average percentage of mixed C&D Waste they Recycle. Waste processor's average percentage of mixed C&D waste must not include Alternative Daily Cover as a recycled material for LEED v4 projects.
 5. Landfill information: Names of landfills where non-Recyclable/reusable/salvageable Waste will be disposed, and list of applicable tipping fees.
 6. Material handling procedures: Specify whether materials must be separated or commingled and describe the planned diversion strategies. Describe expected amount of each material type, where materials must be taken and how the Recycling facility must process the material. Provide a description of the means by which any Recyclable, Salvaged, or Reused materials will be protected from contamination and collected in a manner that will meet the requirements for acceptance by the designated Recycling processors.
 7. Transportation: A description of the means of transportation and destination for Recycled materials.
 8. Meetings: Regular meetings must be held monthly, or as directed by the Commissioner, and the Contractor must provide a description of these meetings to address Waste management.
 9. Sample spreadsheet and description of how the implementation of the Plan will be documented and submitted on a monthly basis.
- D. Final Waste Management Plan: Within fifteen (15) Days of Commissioner's approval of the Draft Waste Management Plan, the Contractor must submit a Final Waste Management Plan.
- E. Progress Reports: The Contractor must submit a monthly Waste Management Progress Report, containing the following information:



1. Project title, name of company completing report, and dates of period covered by the report.
 2. Report on the disposal of all Project Site Waste. A DDC C&D Waste Management Log form is included at the end of this section. For each shipment of material removed from the Site, provide the following:
 - a. Date and ticket number of removal;
 - b. Identity of material hauler;
 - c. Material type;
 - d. Waste sorting method;
 - e. Total quantity of Waste, in tons/cubic yards, by type;
 - f. Quantity of Waste Salvaged, Recycled and/or Reused, by type;
 - g. Total quantity of Waste diverted from landfill (Recycled, Salvaged, Reused) as a percentage of total Waste; and
 - h. Recipient of each material type.
 3. Provide monthly and cumulative Project totals of Waste, quantity diverted, and percentage diverted.
 4. Note that the unit of measurement may be either tons or cubic yards but must be consistent for all shipments and all materials throughout the Project. Reports with inconsistent or mixed units will not be reviewed and will be Returned for re-submission.
 5. Include legible copies of on-Site logs, weight tickets and receipts. Receipts must be from charitable organizations, Recycling and/or disposal site operators who can legally accept the materials for the purpose of reuse, Recycling or disposal. Contractor must save such original documents for the life of the Project plus seven (7) years.
- F. LEED Submittal: For LEED-designated projects, submit final LEED construction Waste report signed by the Contractor, tabulating total Waste material, quantities diverted and means by which it is diverted, and statement that requirements for the credit have been met. Waste report must include:
1. At least four (4) material streams for diverted materials;
 2. Documentation of Recycling rates for commingled facilities; and
 3. For Waste-to-Energy strategy, submit documentation of facility adherence to relevant EN standards, and justification for the strategy.
- G. Refrigerant Recovery: Where refrigerant is recovered, submit statement of refrigerant recovery, which must include:
1. Name, address, qualification data and signature of the refrigerant recovery technician responsible for recovering refrigerant;
 2. Statement that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations; and
 3. Date refrigerant was recovered.



1.8 QUALITY ASSURANCE:

- A. The Contractor must designate a Construction Waste Management Representative to ensure compliance with this section. The Representative must be present at the Project Site full-time and for the duration of the Project.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Waste Management Plans, documentation, and implementation must be discussed at the following meetings:
 - 1. Pre-demolition kick-off meeting;
 - 2. Pre-construction kick-off meeting;
 - 3. Regular job-site meetings; and
 - 4. Contractor toolbox meetings.
- E. For LEED v4 projects, Waste-to-Energy Facilities: Comply with EN standards for Waste management and emissions into air, soil, surface water, and groundwater.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 WASTE PLAN IMPLEMENTATION:

- A. Prior to the demolition and construction start, the Contractor must implement the Waste Management Plan, coordinate the Plan with all affected trades, and designate one individual as the Construction Waste Management Representative. The Representative will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis and for assembling the required LEED documentation.
- B. The Contractor must be responsible for the provision of containers and the removal of all Waste, non-Returned surplus materials and rubbish from the Site in accordance with the approved Waste Management Plan. The Contractor must oversee and document the results of the Plan. Monies received for Salvaged materials must remain with the Contractor, except the monies for those items specifically identified elsewhere in the specifications or indicated on the Contract Drawings as belonging to others.
- C. Responsibilities of subcontractors: Each subcontractor must be responsible for collecting its Waste, non-Returned surplus materials and rubbish, in accordance with the Waste Management Plan.
- D. Distribution: The Contractor must distribute copies of the Waste Management Plan to each subcontractor, Resident Engineer, Construction Manager, and the Commissioner.
- E. Instruction: The Contractor must provide on-Site instruction of proper Waste management procedures to be used by all parties at appropriate stages of the Project.
- F. Procedures: Conduct Waste management operations to ensure minimum interference with Site vegetation, roads, streets, walkways and other adjacent, occupied, and used facilities. The waste management operations include, but are not limited to:
 - 1. Collect commingled Waste and/or separate all Recyclable Waste in accordance with the Plan. Specific areas on the Project Site are to be designated, and appropriate containers and bins clearly marked with acceptable and unacceptable materials.
 - 2. Inspect containers and bins for contamination and remove contaminated materials if found. Comply with requirements in the following General Conditions sections for controlling dust



and dirt, environmental protection, and noise control: Section 01 81 19 - INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS, Section 01 81 13.03 - SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 - SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS, Section 01 10 00 – SUMMARY, Section 01 35 26 - SAFETY REQUIREMENTS PROCEDURES, Section 01 50 00 - TEMPORARY FACILITIES, SERVICES AND CONTROLS, and Section 01 73 00 – EXECUTION..

3.2 ADDITIONAL DEMOLITION AND SALVAGE REQUIREMENTS:

- A. Demolition and Salvage of additional items indicated in other sections of the Project Specifications require special attention as part of the overall seventy-five percent (75%) Diversion from Landfill. Specific requirements for special attention are designated in other sections of the Project Specifications.

3.3 DISPOSAL:

- A. General: Except for items or material to be Salvaged, Recycled, or otherwise Reused, remove Waste material from the Project Site and legally dispose of them in a manner acceptable to authorities having jurisdiction.
 - 1. Except as otherwise specified, do not allow Waste materials that are to be disposed of to accumulate on Site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn Waste materials.
- C. Disposal: Transport Waste materials off Project Site and legally dispose of them.

END OF SECTION 01 74 19



Project Name: _____
Project I.D.: _____

Contractor: _____
Prepared by: _____
For Month: _____

Haul Date	Ticket #	Hauling Company	*Material Type ²	Sorting Method ⁵	Material Quantity (tons or cubic yards) ¹			*Material Recipient	
					*Total Weight	Excluded Material ³	*Diverted Material ⁴		*Landfilled Material
Monthly Totals					*Total		*Diverted	*Landfilled	
% Diverted this Month*									
Cumulative Totals									
% Diverted to Date									

- Notes:
1. Volume (cubic yards) may be used instead of weight if used for ALL amounts and ALL materials.
 2. Includes concrete; bricks; concrete masonry units (CMU); asphalt; metals; clean dimensional wood; carpet and pad; drywall; ceiling tiles; cardboard, paper, and packaging; and any other Reuse items indicated on the Contract Drawings and/or elsewhere in the Specifications.
 3. Excluded material includes soil or land clearing debris and for LEED v4 projects, Alternative Daily Cover (ADC) such as screen fines and 6" minus.
 4. Diverted material includes Recycled and Reused material diverted from landfill. Recycled material is reprocessed into new products. Reused material is reclaimed, Salvaged or otherwise used in its original form, either on-site or off-site.
 5. Sorting Method must be classified as On-Site Sorted, Off-Site Sorted Method 1, or Off-Site Sorted Method 2.
- * These items must be listed in order to receive LEED credit.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 77 00
CLOSEOUT PROCEDURES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and general procedural requirements for Closeout Procedures, including, without limitation, the following:
1. Definitions
 2. Substantial Completion
 3. Final Acceptance
 4. Warranties
 5. Final Cleaning
- B. LEED: Refer to the Addendum to identify whether this Project is designed to comply with a Certification Level according to the U.S. Green Building Council's (USGBC) Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
- C. COMMISSIONING: Refer to the Addendum to identify whether this Project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning must be in accordance with ASHRAE and USGBC LEED- NC procedures, as described in Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS and Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE. The Contractor must cooperate with the Commissioning Agent and provide whatever assistance is required.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
B. Section 01 33 00 SUBMITTAL PROCEDURES
C. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
E. Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



<u>Term</u>	<u>Definition</u>
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the Design Consultant may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBSTANTIAL COMPLETION:

- A. Preliminary Procedures: Before requesting inspection to determine the date of Substantial Completion, the Contractor must complete and supply all items required by the Contract Specifications, General Conditions, Addendum to the General Conditions, change orders or other directives from the Commissioner’s representatives. The required items will include all Contract requirements for Substantial Completion, including, but not limited to, items related to releases, regulatory approvals, warranties and guarantees, record documents, testing, demonstration and orientation, final clean up and repairs, and all specific checklist of items by the Resident Engineer. (See Attachment “A” at the end of this section for sample requirements for Substantial Completion).
- B. The Contractor must prepare and submit a list to the Resident Engineer of incomplete items, the value of incomplete construction, and reasons the Work is not complete.
- C. Inspection: The Contractor must submit to the Resident Engineer a written request for inspection for Substantial Completion. Within ten (10) Days of receipt of the request, the Resident Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, client agency representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer makes a determination that the Work is Substantially Complete and approves the Final Approved Punch List and the date for Final Acceptance, he/she will so advise the Commissioner and recommend issuance of the Certificate of Substantial Completion. If the Resident Engineer determines that the Work is not substantially complete, he/she will notify the Contractor of those items that must be completed or corrected before the Certificate of Substantial Completion will be issued.
 - 1 Re-inspection: Contractor must request re-inspection when the Work identified in previous inspections as incomplete are completed or corrected.
 - 2 Results of completed inspection will form the basis of the requirements for Final Acceptance.

1.6 FINAL ACCEPTANCE:

- A. Preliminary Procedures: Before requesting final inspection for Final Acceptance of the Work, the Contractor must complete the following. (Note that the following are to be completed, submitted as appropriate, and approved by the Commissioner, as applicable, prior to the final inspection and are not to be submitted for approval or otherwise at the final inspection unless specifically indicated). List exceptions in the request.
 - 1. Verify that all required submittals have been provided to the Commissioner including, but not limited to, the following:
 - a. Manufacturer’s cleaning instructions;
 - b. Posted instructions;
 - c. As-built Contract Documents (Drawings, Specifications, and product data) as described in Section 01 78 39 CONTRACT RECORD DOCUMENTS, incorporating any changes required



- by the Commissioner as a result of the review of the submission prior to the pre-final inspection;
- d. Operation and maintenance manuals, including preventive maintenance, special tools, repair requirements, parts list, spare parts list, and operating instructions;
 - e. Completion of required demonstration and orientation, as applicable, of designated personnel in operation and maintenance of systems, sub-systems and equipment;
 - f. Applicable LEED Building submittals as described in Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS; and
 - g. Construction progress photographs as described in Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION.
2. Submit a certified copy of the Final Approved Punch List of items to be completed or corrected. The certified copy of the Punch List must state that each item has been completed or otherwise resolved for acceptance, and must be endorsed and dated by the Contractor.
 3. Submit pest-control final inspection report and survey as required in Section 01 50 00 TEMPORARY FACILITIES AND CONTROLS.
 4. Submit record documents and similar final record information.
 5. Deliver tools and similar items.
 6. Complete final clean-up requirements including touch-up painting of marred surfaces.
 7. Submit final meter readings for utilities, as applicable, a measured record of stored fuel, and similar data as of the date when the City took possession of and assumed responsibility for corresponding elements of the Work.
- B. Final Inspection: The Contractor must submit to the Resident Engineer a written request for inspection for Final Acceptance of the Work. Within ten (10) Days of receipt of the request, the Resident Engineer will either proceed with inspection or notify the Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, client agency representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer finds that all items on the Final Approved Punch List are complete and no further Work remains to be done, he/she will so advise the Commissioner and recommend the issuance of the determination of Final Acceptance. If the Resident Engineer determines that the Work is not complete, he/she will notify the Contractor of those items that must be completed or corrected before the determination of Final Acceptance will be issued.
- C. Final Acceptance: The Work will be accepted as final and complete as of the date of the Resident Engineer's inspection if, upon such inspection, the Resident Engineer finds that all items on the Final Approved Punch List are complete and no further Work remains to be done. The Commissioner will then issue a written determination of Final Acceptance.

1.7 WARRANTIES:

- A. Schedule B of the Addendum lists the items of materials and/or equipment for which manufacturer warranties are required. For each item of material and/or equipment listed in Schedule B, the Contractor must obtain a written warranty from the manufacturer. Such warranty must provide that the material or equipment is free from defects for the period set forth in Schedule B and will be replaced or repaired within such specified period. The Contractor must deliver all required warranties to the Commissioner.
- B. Unless indicated otherwise, warranties are to take effect on the date of Substantial Completion.



- C. Submittal Time: Submit written warranties on request of the Commissioner for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated.
- D. Partial Occupancy: Submit properly executed warranties to the Commissioner within fifteen (15) Days of completion of designated portions of the Work that are completed and occupied or used by the City.
- E. Organize the warranty documents into an orderly sequence based on the Project Specification Divisions and Section Numbers.
 - 1. Bind warranties in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Identify each binder on the front and spine with the typed or printed title "WARRANTIES"; name and location of Project; Capitol Budget Project Number (FMS ID); and Contractor's and applicable subcontractor's name and address.
 - 3. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation.
 - 4. Provide a typed description of each product or installation being warranted, including the name of the product, and the name, address, and telephone number of the installer.
- F. When warranted materials and/or equipment require operation and maintenance manuals, provide additional copies of each required warranty in each required manual. Refer to Section 01 78 39 CONTRACT RECORD DOCUMENTS, for requirements of operation and maintenance manuals.

PART II – PRODUCTS

2.1 MATERIALS:

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART III – EXECUTION

3.1 FINAL CLEANING:

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 - 1. Complete the following cleaning operations, as applicable, before requesting inspection for Final Acceptance of the Work for the entire Project or for a portion of the Project:
 - a. Clean Project Site, yard, and grounds in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project Site.
 - e. Remove snow and ice to provide safe access to building.



- f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.
 - j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
 - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - n. Replace parts subject to unusual operating conditions.
 - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
 - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
 - s. Leave Project clean and ready for occupancy.
 - t. Construction Waste Disposal: Comply with waste disposal requirements in Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests, as required in Section 01 50 00 TEMPORARY FACILITIES, SERVICES AND CONTROLS. Prepare and submit a pest control report to the Commissioner.
- D. Comply with all applicable safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on City's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project Site and dispose of lawfully.

END OF SECTION 01 77 00



SECTION 01 77 00

ATTACHMENT 'A'

The following list is a general sample of Substantial Completion requirements, including, but not limited to:

1. Prepare and submit a list to the Resident Engineer of incomplete items, the value of incomplete construction, and reasons the Work is not complete.
2. Obtain and submit any necessary releases enabling the City unrestricted use of the Project and access to services and utilities.
3. Regulatory Approvals: Submit all required documentation from applicable governing authorities, including, but not limited to, the New York City Department of Buildings (DOB); Department of Transportation (DOT); Department of Environmental Protection (DEP); Fire Department (FDNY); etc. Documentation includes, but is not limited to, the following:
 - a. Building permits, applications and sign-offs;
 - b. Permits and sign-off for construction fences; sidewalk bridges; scaffolds, cranes and derricks; utilities; etc.;
 - c. Certificates of inspections and sign-offs;
 - d. Required certificates and use permits; and
 - e. Certificate of Occupancy (C.O.), Temporary Certificate of Occupancy (T.C.O.) or Letter of Completion as applicable.
4. Submit specific warranties required by the Specifications, final certifications, and similar documents.
5. Prepare and submit Contract Documents as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, including but not limited to:
 - a. Approved documentation from governing authorities;
 - b. As-built record drawings and Specifications; product data; operation and maintenance manuals;
 - c. Final Completion construction photographs;
 - d. Damage or settlement surveys;
 - e. Final property surveys; and
 - f. Similar final record information.
 - g. The Resident Engineer will review the submission and provide appropriate comments. If comments are significant, the initial submission will be returned to the Contractor for correction and re-submission incorporating the comments prior to the Final Inspection.
6. Record Waste Management Progress Report: Submit Construction & Demolition (C&D) Waste Management logs, with legible copies of weight tickets and receipts required in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
7. If applicable submit LEED letter template in accordance with the requirements of Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

8. Schedule applicable demonstration and orientation required in other sections of the Project Specifications and as described in Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.
9. Deliver tools and similar items to location designated by Resident Engineer. Label with manufacturer's name and model number where applicable.
10. Make final changeover of permanent locks and deliver keys to the Resident Engineer. Advise Commissioner of changeover in security provisions.
11. Complete startup testing of systems as applicable.
12. Submit approved test/adjust/balance records.
13. Terminate and remove temporary facilities from Project Site, along with mockups, construction tools, and similar elements as directed by the Resident Engineer.
14. If applicable, complete Commissioning requirements as defined in Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS and/ or Section 01 91 15 BUILDING ENCLOSURE COMMISSIONING REQUIREMENTS.
15. Complete final cleaning requirements, including touchup painting.
16. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 78 39
CONTRACT RECORD DOCUMENTS**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and general procedural requirements for Contract Record Documents, including:
1. Contract Record Drawings
 2. Record Specifications, Addenda and Change Orders
 3. Record Product Data
 4. Record Sample Submittal
 5. Construction Record Photographs
 6. Operating and Maintenance Manuals
 7. Final Site Survey
 8. Demonstration and Orientation DVD
 9. Guarantees and Warranties
 10. Waste Disposal Documentation
 11. LEED Materials and Matrix
 12. Miscellaneous Record Submittals
- B. The Department of Design and Construction (DDC), at the start of construction (kick-off meeting), will furnish to the Contractor, at no cost, a complete set of Contract Record Drawings (PDF set) pertaining to the Work to be performed under the Contract. It is the responsibility of the Contractor to modify the Contract Drawings to indicate all changes and corrections, if any, occurring in the Work as actually installed. The Contractor is required to furnish all other drawings, if necessary, such as Addenda Drawings and Supplementary Drawings as may be necessary to indicate all Work in detail as actually completed. All professional seals must be blocked out. Title box complete with Project title and Design Consultants' names will remain.
- C. Maintenance of Documents and Samples: The Contractor must maintain, during the progress of the Work, an accurate record of the Work as actually installed, on Contract Record Drawings (PDF set). Store Contract Record Documents and samples in the field office apart from the Contract Documents used for construction. Do not use Contract Record Documents for construction purposes. Maintain Contract Record Documents in good order and in a clean, dry, legible condition. Make documents and samples available at all times for the Resident Engineer's inspections.
1. The Contractor's attention is particularly directed to the necessity of keeping accurate records of all subsurface and concealed Work, so that the Contract Record Drawings contain this information in exact detail and location. Contract Record Drawings must also show all connections, valves, gates, switches, cut-outs and similar operating equipment.



2. For projects designated to achieve a Leadership in Energy and Environmental Design (LEED) rating, the Contractor will receive a copy of the Project’s LEED scorecard for the purpose of monitoring compliance with the target objectives and to facilitate coordination with the LEED Consultant. The Contractor will receive periodic updates of this scorecard and is required to submit the final version of the Scorecard at Substantial Completion with other Project Record Documents.

1.3 RELATED SECTIONS: include without limitation the following:

- | | | |
|----|------------------|-------------------------------------|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| C. | Section 01 32 33 | PHOTOGRAPHIC DOCUMENTATION |
| D. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| E. | Section 01 77 00 | PROJECT CLOSEOUT PROCEDURES |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Commissioning Authority / Commissioning Agent (CxA)	The entity responsible for providing commissioning services for the Project. The entity serving as the CxA may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the Design Consultant may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
LEED Consultant	The entity responsible for providing LEED sustainability services for the Project. The entity serving as the LEED Consultant may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. As-Built Contract Record Drawings: The Contractor must comply with the following:
 1. Progress Submission: As directed by the Resident Engineer, submit progress as-built Contract Record Drawings at the fifty percent (50%) construction completion stage.
 2. Final Submission: Before Substantial Completion payment, the Contractor must furnish to the Commissioner one (1) complete set of marked-up as-built Contract Record Drawings, in PDF indicating all of the Work and locations as actually installed.
 3. As-built Contract Record Drawings must be of the same size as that of the Contract Drawings, with a one (1) inch margin on three (3) sides and a two (2) inch margin on the left side for binding.
 4. Each as-built Contract Record Drawing must bear the legend "AS-BUILT CONTRACT RECORD DRAWING" in heavy block lettering, one half (1/2) inch high, and contain the following data:



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

AS-BUILT CONTRACT RECORD DRAWING

Contractor's Name _____
 Contractor's Address _____
 Subcontractor's Name (where applicable) _____
 Subcontractor's Address _____
 Made by: _____ Date _____
 Checked by: _____ Date _____

Commissioner's Representatives
 (Resident Engineer) DDC
 (Plumbing Inspector) DDC
 (Heating & Ventilating Inspector) DDC
 (Electrical Inspector) DDC

5. Contract Record Drawing Title Sheet: The Contractor must prepare a title sheet, the same size as the Contract Record Drawings, which must contain the following:
 - a. Heading:
 - The City of New York
 - Department of Design and Construction
 - Division of Public Buildings
 - b. Capital Budget Project Number (FMS ID)
 - c. Name and Location of Project
 - d. Contractor's Name and Address
 - e. Subcontractor's Name and Address (where applicable)
 - f. Record of changes (a caption description of work affected, and the date and number of change order or other authorization)
 - g. List of Record Drawings
- B. Record Specifications, Addenda and Change Order: Submit to the Commissioner two (2) copies each of marked-up Record Specifications, Addenda and change orders.
- C. Record Product Data: Submit to the Commissioner two (2) sets of Record Product Data.
- D. Record Construction Photographs: Submit to the Commissioner final as-built construction photographs and digital files of the completed Work as described in Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION.
- E. Operating and Maintenance Manuals:
 1. Submit three (3) copies each of preliminary manuals to the Resident Engineer for review and approval. The Contractor must make such corrections, changes and/or additions to the manual until deemed satisfactory by the Resident Engineer. Deliver three (3) copies of the final approved manuals to the Resident Engineer for distribution.
 2. Commissioning: Comply with the requirements of Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS and 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE, as well as the requirements set forth in sections of the Project Specifications, for projects designated for commissioning. Submit four (4) copies each of data designated to be included in the commissioning operation and maintenance manual to the Resident Engineer. The Resident Engineer will forward such data to the Commissioning Authority/Agent (CxA) for review and comment. The Contractor must make such corrections, changes and/or additions to the data until deemed satisfactory and deliver four (4) copies of the final data to the Resident Engineer for use by the CxA to prepare the commissioning operation and maintenance manual.



- a. Non-Commissioning Data: All remaining data not designated for commissioning and required as part of maintenance and operation manual must be prepared and assembled in accordance with the requirements of this section for operating and maintenance manuals.
- F. Final Site Survey: Submit Final Site survey as described in Section 01 73 00, EXECUTION, in quantities requested by the Commissioner, signed and sealed by a Land Surveyor licensed in the State of New York.
- G. Guarantees and Warranties.
- H. Waste Disposal Documents and Miscellaneous Record Documents.

PART II – PRODUCTS

2.1 CONTRACT RECORD DRAWINGS:

- A. Record Prints: The Contractor must maintain one (1) set of blue- or black-line white prints as applicable of the Contract Record Drawings and Shop Drawings. If applicable, the Contract Record Drawings and Shop Drawings must incorporate the arrangement of the Work based on the accepted master coordination drawing(s) as described in Section 01 33 00, SUBMITTAL PROCEDURES.
 - 1. Preparation: The Contractor must mark record drawings to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
 - 2. Change Orders: All changes from Contract Drawings must be distinctly encircled and identified by change order number correlating to changes listed on the "Title Sheet." The Contractor must show within the encircled areas the work as actually installed.
- B. Content: Types of items requiring marking include, but are not limited to, the following:
 - 1. Dimensional changes to Contract Record Drawings;
 - 2. Revisions to details shown on Contract Record Drawings;
 - 3. Depths of foundations below first floor;
 - 4. Locations and depths of underground utilities;
 - 5. Revisions to routing of piping and conduits;
 - 6. Revisions to electrical circuitry;
 - 7. Actual equipment locations;
 - 8. Duct size and routing;
 - 9. Locations of concealed internal utilities;
 - 10. Changes made by change order;
 - 11. Changes made following Commissioner's written orders;
 - 12. Details not on the original Contract Drawings;
 - 13. Field records for variable and concealed conditions; and
 - 14. Record information on the Work that is shown only schematically.
- C. Progress Record Prints: As directed by the Resident Engineer, at fifty percent (50%) construction completion, review marked-up Record Prints with the Resident Engineer and the Design Consultant. When directed by the Resident Engineer, transfer progress mark-ups to a PDF set and submit to the Resident Engineer.



- D. Final Contract Record Prints: Immediately before final inspection for the Certificate of Substantial Completion, review marked-up record prints with the Resident Engineer and the Design Consultant. When authorized, complete mark-up of a full set of corrected PDF prints of the Contract Drawings.
1. Incorporate changes and additional information previously marked on Record Prints. Erase, redraw, and add details and notations where applicable.
 2. Refer instances of uncertainty to Resident Engineer for resolution.
 3. Submit the as-built Contract Record Drawings and Shop Drawings for use as record prints as described in Sub-Section 1.5.

2.2 RECORD SPECIFICATIONS, ADDENDA AND CHANGE ORDERS:

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, Addenda, and Contract modifications.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 3. Record the name of manufacturer, supplier, installer, and other information necessary to provide a record of selections made.
 4. For each principal product, indicate whether record product data has been submitted in operation and maintenance manuals instead of submitted as record product data.
 5. Note related change orders and Contract Record Drawings where applicable.
 6. Upon completion of mark-up, submit two (2) complete copies of the marked-up record Specifications to the Commissioner.

2.3 RECORD PRODUCT DATA:

- A. Preparation: Mark product data to indicate the actual product installation where installation varies substantially from that indicated in product data submittal.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Include significant changes in the product delivered to Project Site and changes in manufacturer's written instructions for installation.
 3. If possible, a change order proposal should include resubmitting updated product data. This eliminates the need to mark up the previous submittal.
 4. Note related change orders and Contract Record Drawings where applicable.
 5. Upon completion of mark-up, submit to the Commissioner two (2) sets of the marked-up record product data.
 6. Where record product data is required as part of maintenance manuals, submit marked-up product data as an insert in the manual instead of submittal as record product data.

2.4 RECORD SAMPLE SUBMITTAL:

- A. Prior to the date of Substantial Completion, the Contractor must meet with the Resident Engineer at the Site to determine which of the samples maintained during the construction period must be transmitted to the Commissioner for record purposes.



- B. Comply with the Resident Engineer's instructions for packaging, identification marking, and delivery to DDC. Dispose of other samples as specified for disposal of surplus and waste material.

2.5 CONSTRUCTION RECORD PHOTOGRAPHS:

- A. The Contractor must submit the final completion construction photographs, in compliance with Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION.

2.6 OPERATING AND MAINTENANCE MANUALS:

- A. The Contractor must provide preliminary and final versions of operating and maintenance manuals required for those systems, equipment, and materials listed in other Sections of the Project Specifications.
- B. Format: Prepare and assemble operation and maintenance manuals in heavy-duty, 3-ring, hardback loose leaf binders in the form of an instructional manual. All binders for each discipline must be the same color. When multiple binders are used, correlate data into related consistent groupings. Binder front must contain permanently attached labels displaying the following:
 - 1. Heading:
The City of New York
Department of Design and Construction
Division of Public Buildings
 - 2. Capital Budget Project Number (FMS ID)
 - 3. Name and Location of Project
 - 4. Contractor's Name and Address
 - 5. Subcontractor's Name and Address (where applicable)
 - 6. Dates of the Work covered by the contents of the Project Manual.
 - 7. Binder spine must display Project Number (FMS ID) and date of completion.
- C. Organization: Include a section in the directory for each of the following:
 - 1. List of documents
 - 2. List of systems
 - 3. List of equipment
 - 4. Table of contents
- D. Each manual must contain the following materials, in the order listed:
 - 1. Title page
 - 2. Table of contents
 - 3. Manual contents
- E. Arrange contents alphabetically by system, subsystem, and equipment. Cross-reference Specification Section numbers. Provide tabbed flyleaf for each separate product, equipment and/or system/subsystem with typed description of product and major component parts of equipment.
- F. Safety warnings or cautions must be visibly highlighted within each maintenance procedure. Use of such highlights must be limited to only critical items and must not be used in an excessive manner which would reduce their effectiveness.
- G. For each product or system, list names, addresses and telephone numbers of subcontractors and suppliers, including local source of supplies and replacement parts. Vendors and supplier listings are to include names, addresses and telephone numbers, including nearest field service telephone numbers.
- H. Where contents of the manual include any manufacturer's catalog pages, clearly indicate the precise items and options included in the installation and delete all manufacturers' data regarding products not included in the installation.



- I. All material within manuals must be new. Copies used for prior submittals or used in construction must not be used.
- J. Submit preliminary and final manual editions to the Commissioner according to the approved progress schedule.
- K. Manuals must present all technical material to the greatest extent possible, with respect to text, tabular matter and illustrations. Illustrations must preferably consist of line drawings. All applicable drawings must be included. If available, color photograph prints may be included.
- L. Preliminary manual editions must be as technically complete as the final manual edition. All illustrations must be in final forms.
- M. Final manual editions must be technically accurate and complete and must represent all “as-built” systems, pieces of equipment, or materials, which have been accepted by the Commissioner. All illustrations, text and tabular material must be in final form. All shop drawings must be included as specified in individual Specification Sections.
- N. Building products, applied materials, and finishes: Include product data, with catalog number, size, composition, and color texture designations. Where applicable, provide information for re-ordering custom manufactured products.
- O. Instructions for care and maintenance: Include manufacturers’ recommendations for cleaning agents and methods, and recommended schedule for cleaning and maintenance.
- P. Moisture protection and weather exposed products: Include product data listing applicable reference standards, chemical compositions, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- Q. Additional requirements: Specified in individual Specification Sections.

2.7 FINAL SITE SURVEY

- A. The Contractor must submit the final certification and final survey in compliance with Section 01 73 00 EXECUTION.

2.8 DEMONSTRATION AND ORIENTATION DVD:

- A. The Contractor must submit a final version of applicable demonstration and training electronic recordings in compliance with Section 01 79 00 DEMONSTRATION AND OWNER’S PRE-ACCEPTANCE ORIENTATION.

2.9 GUARANTEES AND WARRANTIES:

- B. SCHEDULE B: Requirements for guarantees and warranties for the Project are set forth in Schedule B, which is included as part of the Addendum.
- C. FORM: For all guaranty requirements set forth in Schedule B, the Contractor must provide a written guaranty, in the form set forth herein.
- D. Submit fully executed and signed manufacturers’ warranties as listed in the Project Specifications and outlined in Schedule B of the Addendum. Refer to Section 01 77 00, CLOSEOUT PROCEDURES for submittal requirements.



GUARANTY

DDC PROJECT # _____

PROJECT DESCRIPTION _____

CONTRACT # _____

SPECIFICATION SECTION # AND TITLE _____

GUARANTY TO BE IN EFFECT FROM _____

TO _____

The Contractor hereby guarantees that the Work specified under the above section of the aforesaid Contract will be free from defects of material and/or workmanship, for the period indicated above.

The Contractor also guarantees that it will promptly repair, restore, rebuild or replace whichever may be deemed necessary by the City, any or all defective material or workmanship of the aforementioned section, that may appear within the guaranty period and any finished Work to which damage may occur because of such defects, to the satisfaction of the City and without any cost or expense to the City.

The Contractor hereby agrees to pay to the City the cost of the repairs or replacements should the City make the same because of the failure of the Contractor to do so.

Contractor: _____

By: _____
Signature of Partner or Corporate Officer

Print Name: _____

Subscribed and sworn to before me this
day of _____, year _____

Notary Public



2.10 WASTE DISPOSAL DOCUMENTATION:

- A. Certify and deliver to the Commissioner all documentation including reports, receipts, certificates, records etc. for the collection, handling, storage, classification, testing, transportation, recycling and/or disposal of all Non-Hazardous Construction Waste as required by Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL, and Hazardous Waste as required by other Project Specification Sections. Certify compliance with all applicable governing laws, codes, rules and regulations.

2.11 MISCELLANEOUS RECORD DOCUMENTS:

- A. Refer to other Project Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities. Prior to Final Acceptance, complete miscellaneous records and place in good order, properly identified and bound or otherwise organized to allow for use and reference.
- B. Submit three (3) copies of each document to the Commissioner or as otherwise directed by the Commissioner.

PART III – EXECUTION

3.1 RECORDING AND MAINTENANCE:

- A. Recording: Maintain one (1) copy of each submittal during the construction period for Contract Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of the Project.
- B. Maintenance of Record Documents and Samples: Store Contract Record Documents and samples in the field office apart from the Contract Documents used for construction. Do not use Contract Record Documents for construction purposes. Maintain Contract Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to the Contract Record Documents for the Resident Engineer's reference during normal working hours.

END OF SECTION 01 78 39



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 79 00
DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 79 00

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and procedural requirements, when set forth in sections of the Project Specifications, for instructing the facility's personnel, including the following:
 - 1. Demonstration of operation of systems, subsystems, and equipment.
 - 2. Owner's pre-acceptance orientation in operation and maintenance of systems, subsystems, and equipment.
 - 3. Demonstration and orientation video recordings.
- B. The Contractor must provide the services of orientation specialists from the Contractor's equipment manufacturers. The specialists must be experienced in the type of equipment to be demonstrated.
- C. Separate orientation sessions must be conducted for mechanical operations and maintenance personnel and for electronic and electrical maintenance personnel.
- D. Commissioning: Refer to the Addendum to identify whether this project is to be commissioned. For commissioned projects, the Contractor must provide demonstration and orientation as described in this section and cooperate with the Commissioning Authority/Agent (CxA) to implement commissioning requirements as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS, and/ or Section 01 91 15 BUILDING ENCLOSURE COMMISSIONING REQUIREMENTS.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 77 00 CLOSEOUT PROCEDURES
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS
- F. Section 01 91 15 BUILDING ENCLOSURE COMMISSIONING REQUIREMENTS
- G. Specific requirements for demonstration and orientation indicated in other sections of the Project Specifications.



1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Commissioning Authority / Commissioning Agent (CxA)	The entity responsible for providing commissioning services for the Project. The entity serving as the CxA may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the Design Consultant may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. Instruction Program: Submit three (3) copies of an outline of the instructional program for demonstration and orientation, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each orientation module to the Commissioner for approval no less than thirty (30) Days prior to the date the proposed orientation is to take place. Include learning objectives and outline for each orientation module.
 - 1. At completion of orientation, submit three (3) complete training manual(s) and three (3) applicable video recording(s) to the Commissioner for the facility's and City's use.
- B. Qualification Data: For facilitator, instructor and videographer.
- C. Attendance Record: For each orientation module, submit a list of participants and length of instruction time.
- D. Evaluations: For each participant and for each orientation module, submit results and documentation of performance-based test.
- E. Submit all final orientation materials to the Resident Engineer a minimum of fourteen (14) Days prior to the scheduled orientation.
- F. Demonstration and Orientation Recordings:
 - 1. All Projects:
 - a. The Contractor must submit to the Commissioner three (3) copies of demonstration and orientation video recordings within seven (7) Days of end of each orientation module.
 - b. Identification: On each copy, provide an applied label with the following information:
 - 1) Project Contract I.D. Number
 - 2) Project Contract Name
 - 3) Name of Contractor
 - 4) Name of Subcontractor as applicable
 - 5) Name of Design Consultant
 - 6) Name of Construction Manager as applicable
 - 7) Date recorded



- 8) Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 - 9) Table of Contents including list of systems covered.
- c. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding DVD recording. Include name of Project and date of recording on each page.
 - d. Commissioned Projects: The Contractor must submit one (1) additional copy of the demonstration and orientation video recording to the CxA through the Resident Engineer who will include the approved recording in the commissioning report.

1.6 QUALITY ASSURANCE:

- A. Facilitator Qualifications: A firm or individual experienced in orientation or educating maintenance personnel in an orientation program similar in content and extent to that indicated for this Project.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 01 40 00 QUALITY REQUIREMENTS, experienced in operation and maintenance procedures and orientation.
- C. Videographer Qualifications: A professional videographer who has experience with orientation and construction projects.
- D. Pre-Instruction Conference: Schedule with the Resident Engineer a conference at Project Site in accordance with Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION. Review methods and procedures related to demonstration and orientation including, but not limited to, the following:
 1. Inspect and discuss locations and other facilities required for instruction.
 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
 3. Review required content of instruction.
 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.7 COORDINATION:

- A. Coordinate instruction schedule with the Resident Engineer and facility's operations. Adjust schedule as required to minimize disrupting facility's operations.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
- C. Coordinate content of orientation modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the Commissioner.

PART II – PRODUCTS

2.1 INSTRUCTION PROGRAM:

- A. Program Structure: Develop an instruction program that includes individual orientation modules for each system and equipment not part of a system, as specified and required by individual Specification Sections.



- B. Orientation Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following:
1. For basis of system design, operational requirements, and criteria, include the following:
 - a. System, subsystem, and equipment descriptions;
 - b. Performance and design criteria if Contractor is delegated design responsibility;
 - c. Operating standards;
 - d. Regulatory requirements;
 - e. Equipment function including auxiliary equipment and systems;
 - f. Operating characteristics;
 - g. Limiting conditions; and
 - h. Performance curves.
 2. For documentation, review the following items in detail:
 - a. Emergency manuals;
 - b. Operations manuals;
 - c. Maintenance manuals;
 - d. Project Record Documents;
 - e. Identification systems; and
 - f. Warranties.
 3. For emergencies, include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages;
 - b. Instructions on stopping;
 - c. Shutdown instructions for each type of emergency;
 - d. Operating instructions for conditions outside of normal operating limits;
 - e. Sequences for electric or electronic systems; and
 - f. Special operating instructions and procedures.
 4. For operations, include the following, as applicable:
 - a. Startup procedures;
 - b. Equipment or system break-in procedures;
 - c. Routine and normal operating instructions;
 - d. Regulation and control procedures;
 - e. Control sequences;
 - f. Safety procedures;
 - g. Instructions on stopping;
 - h. Normal shutdown instructions;
 - i. Operating procedures for emergencies;
 - j. Operating procedures for system, subsystem, or equipment failure;
 - k. Seasonal and weekend operating instructions;
 - l. Required sequences for electric or electronic systems; and
 - m. Special operating instructions and procedures.
 5. For adjustments, include the following:
 - a. Alignments;
 - b. Checking adjustments;
 - c. Noise and vibration adjustments; and
 - d. Economy and efficiency adjustments.
 6. For troubleshooting, include the following:



- a. Diagnostic instructions; and
 - b. Test and inspection procedures.
7. For maintenance, include the following:
- a. Inspection procedures;
 - b. Types of cleaning agents to be used and methods of cleaning;
 - c. List of cleaning agents and methods of cleaning detrimental to product;
 - d. Procedures for routine cleaning;
 - e. Procedures for preventive maintenance;
 - f. Procedures for routine maintenance;
 - g. Instruction on use of special tools; and
 - h. Housekeeping practices.
8. For repairs, include the following:
- a. Diagnosis instructions;
 - b. Repair instructions;
 - c. Disassembly, component removal, repair, and replacement; and reassembly instructions;
 - d. Instructions for identifying parts and components; and
 - e. Review of spare parts needed for operation and maintenance.

PART III – EXECUTION

3.1 INSTRUCTION:

- A. Facilitator: Engage a qualified facilitator to prepare the instruction program and orientation modules, to coordinate instructors, and to coordinate between Contractor and the Resident Engineer for the number of participants, instruction times, and location.
- B. The Contractor must engage qualified instructors to instruct the facility's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
- C. Scheduling: Schedule instruction with the Resident Engineer at mutually agreed upon times. For equipment that requires seasonal operation, provide similar instruction at the start of each season.
 1. Schedule orientation with the Resident Engineer with at least fourteen (14) Days advance notice.
- D. Evaluation: At the conclusion of each orientation module, assess and document each participant's mastery of module(s) by use of an oral or written demonstration performance-based test.
- E. Cleanup: Collect and remove used and leftover educational materials from Project Site. Remove instructional equipment. Restore systems and equipment to condition existing before initial orientation use.

3.2 DEMONSTRATION AND ORIENTATION VIDEO RECORDINGS:

- A. All projects:
 1. The Contractor must engage a qualified commercial videographer to video record demonstration and orientation sessions. Record each orientation module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.
 2. At the beginning of each orientation module, record each chart containing learning objective and lesson outline.
 3. All recordings must be close-captioned.
 4. Recording Format: Provide high-quality video recording on USB drive or other electronic media as requested by the Commissioner.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

5. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and orientation. Display continuous running time.
 6. Narration: Describe scenes on the recording by audio narration by microphone while recording or by dubbing audio narration off-site after. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 7. Transcript: Provide a typewritten transcript of the narration. Display images and running time captured from opposite the corresponding narration segment.
- B. Commissioned Projects: Refer to the Addendum to determine if the project is to be commissioned.
1. The Commissioning Authority/Agent (CxA) under separate contract with the City of New York will assess and comment on the adequacy of the orientation instruction sessions by reviewing the orientation and instruction program and agenda provided by the Contractor. The provider of the orientation program will video record the sessions and provide a copy to the CxA for final review and comments. If necessary, Contractor must edit the recording per CxA comments.

END OF SECTION 01 79 00



**SECTION 01 81 13.03
SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.03

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

A. LEED BUILDING - GENERAL REQUIREMENTS:

The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED™ Green Building rating. Specific project requirements related to this goal are listed in the applicable paragraphs of this section of the General Conditions. The Contractor must ensure that these requirements, as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, will not be allowed if such changes compromise the stated LEED BUILDING criteria.

B. This Section includes:

- 1. Definitions
- 2. LEED Provisions
- 3. LEED Building Submittals
- 4. LEED Building Submittal Requirements
- 5. LEED Action Plan

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- B. Section 01 81 13.13 VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS
- C. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- D. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS
- E. Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



Agrifiber Products	Means products derived from recovered agricultural waste fiber from sources such as cereal straw, sugarcane bagasse, sunflower husk, walnut shells, coconut husks, and agricultural prunings, processed and mixed with resins to produce panels with characteristics similar to composite wood.
Composite Wood	Means products composed of wood or plant particles or fibers bonded by a synthetic resin or binder to produce panels such as plywood, particleboard, and medium density fiberboard (MDF). Does not include hardboard, structural panels, glued laminated timber, prefabricated wood I-joists, or finger-jointed lumber.
Design Consultant	Means the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Forest Stewardship Council (FSC) Certified Wood	Means wood-based materials and products certified in accordance with the Forest Stewardship Council’s principles and criteria.
LEED	Means the Leadership in Energy & Environmental Design rating system developed by the United States Green Building Council.
Rapidly Renewable Materials	Means materials made from agricultural products that are typically harvested within a ten-year or shorter cycle. Rapidly renewable materials include products made from bamboo, cotton, flax, jute, straw, sunflower seed hulls, vegetable oils, or wool.
Regionally Manufactured Materials	Means materials that are manufactured within a radius of 500 miles from the Project location. Manufacturing refers to the final assembly of components into the building product that is installed at the Project site.
Regionally Extracted, Harvested, or Recovered Materials	Means materials which are extracted, harvested, or recovered and manufactured within a radius of 500 miles from the Project site.
Recycled Content	Means The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer), or after consumer use (post-consumer). Spills and scraps from the original manufacturing process that are combined with other constituents after a minimal amount of reprocessing for use in further production of the same product are not recycled materials. Discarded materials from one manufacturing process that are used as constituents in another manufacturing process are pre-consumer recycled materials. “Pre-consumer” may also be referred to as “post-industrial”.
Solar Reflectance Index (SRI)	A measure of a material’s ability to reflect solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is equal to 0, and a standard white (reflectance 0.80, emittance of 0.90) is equal to 100.



Volatile Organic Compound (VOC)	Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.
---------------------------------	---

1.5 LEED PROVISIONS:

- A. Refer to the Addendum for the LEED rating to be achieved for this project. The provisions to achieve this LEED rating are integrated within the project construction documents and specifications. The Contractor is specifically directed to the “LEED BUILDING Performance Criteria” and “LEED BUILDING Submittals” sections within the contract specification. Additional LEED requirements are met through aspects of the project design, including material and equipment selections, which may not be specifically identified as LEED BUILDING requirements. Compliance with the requirements needed to obtain LEED prerequisites and credits will be used as one criterion to evaluate substitution requests.

1.6 LEED BUILDING SUBMITTALS:

- A. Scope: LEED BUILDING submittals are required for all installed materials included in General Construction work. LEED BUILDING Submittals are only required for field-applied adhesives, sealants, paints and coatings included in Plumbing, Mechanical and Electrical work. Submit all required LEED BUILDING submittals in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
- B. Applicability: The extent of the LEED BUILDING Submittals varies depending on the specification section. Applicable LEED BUILDING Submittals are listed under the “LEED BUILDING Submittals” heading in each specification section. The detailed requirements for the LEED BUILDING Submittals are defined in Item C below.
- C. Detailed Requirements: Sub-Sections 1.6 C.1 through 1.6 C.3 below defines the information and documents to be provided for each type of LEED BUILDING Submittal as identified in the LEED Submittal Requirements of each specification section:
 - 1. ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM (EBMCF)[GHI]: Information to be supplied for this form (blank sample copy attached at end of this Section to be modified as appropriate to the project) must include some or all of the following items, as identified in the LEED Submittal Requirements of each specification section:
 - a. Cost breakdowns for the materials included in the contractor or sub-contractor’s scope of work. Cost reporting must include itemized material costs (excluding the contractor’s labor, equipment, overhead and profit).
 - b. The percentages (by weight) of post-consumer and/or post-industrial recycled content in the supplied product(s).
 - 1) For each product with recycled content, also indicate the total recycled content value ($1/2 \times \text{pre-consumer percentage} \times \text{product value} + 1 \times \text{post-consumer percentage} \times \text{product value} = \text{total recycled content value}$).
 - 2) See additional requirements for concrete below.
 - c. Identification (Yes/No) of materials manufactured within 500 miles of the project site AND containing raw materials harvested or extracted within 500 miles of the project site.
 - 1) Indicate the percentage by weight, relative to the total weight of the product that meets these criteria.
 - 2) Indicate the point of harvest/extraction/recovery of regional raw materials, the point of final assembly of regional manufactured products, and the distance from each point to the project site.



- d. Volatile Organic Compound (VOC) content of all field-applied adhesives, sealants, paints, and coatings, listed in grams/liter or lbs./gallon, less water.
 - 1) For detailed requirements refer to Section 01 81 13.13 VOC LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
 - e. The amount of “Forest Stewardship Council (FSC) Certified” wood products if used in the Project.
 - 1) Record only new FSC-certified wood products. Do not record reclaimed, salvaged, or recycled FSC-certified wood products.
 - 2) Reclaimed, salvaged, or recycled FSC-certified wood may be recorded as post-consumer recycled content.
 - f. The amount of Rapidly Renewable materials if used in the Project.
 - 1) Indicate the type of rapidly renewable material used, and the percentage by weight, relative to the total weight of the product, that consists of rapidly renewable material.
 - g. The percentage (by weight), relative to the total weight of cementitious materials, of supplementary cementitious materials or pozzolans such as fly ash used in each concrete mix used in the Project.
 - 1) For each concrete mix, provide a complete breakdown of all components, by weight and by cost.
 - h. Identification (Yes/No) of composite wood or agrifiber products used in the project that are free of added urea-added formaldehyde resins.
 - i. Identification (Yes/No) of flooring products used in the project that have Carpet and Rug Institute (CRI) Green Label or Green Label Plus certification, or Resilient Floor Covering Institute FloorScore certification.
 - 1) Untreated solid wood flooring, and mineral-based flooring products such as tile, masonry, terrazzo, and cut stone that have no organic-based coatings or sealants, are excluded from this requirement.
 - j. The EBMCF must record the above information only for those materials or products permanently installed in the project. The EBMCF must record VOC content, composite and agrifiber products, and CRI or FloorScore ratings only for those materials or products permanently installed within the weather barrier of the LEED building.
2. EBMCF BACK-UP DOCUMENTATION: These documents are used to validate the information provided on the EBMCF (except cost data). For each material listed on the EBMCF, provide documentation to certify the material’s LEED BUILDING attributes, as applicable:
- a. RECYCLED CONTENT: Provide published product literature or letter of certification on the manufacturer’s letterhead certifying the amounts of post-consumer and/or post-industrial content.
 - b. REGIONAL MANUFACTURING AND REGIONAL RAW MATERIALS (WITHIN 500 MILES): Provide published product literature or letter of certification on the manufacturer’s letterhead indicating the city/state where the manufacturing plant is located, where each of the raw materials in the product were extracted, harvested or recovered and the distance in miles from the project site.
 - 1) If only some of the raw materials for a particular product or assembly originate within 500 miles of the project site, provide the percentage (by weight) that these materials comprise in the complete product.



- c. **VOC CONTENT:** Provide Material Safety Data Sheets (MSDS) certifying the Volatile Organic Compound (VOC) content of the adhesive, sealant, paint, or coating products. VOC content is to be reported in grams/liter or lbs./gallon, less water. If the MSDS does not show the product's VOC content, this information must be provided through other published product literature from the manufacturer, or stated in a letter of certification from the product manufacturer on the manufacturer's letterhead.
 - d. **RAPIDLY RENEWABLE MATERIALS:** If used in the project, provide published literature or letter of certification on the manufacturer's letterhead certifying the percentage of each product that is rapidly renewable (by weight).
 3. **PRODUCT CUT SHEETS:** Provide product cut sheets with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project.
 4. **CRI GREEN LABEL PLUS CERTIFICATION:** For carpets and carpet cushions, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the "Green Label Plus" IAQ testing program of the Carpet and Rug Institute of Dalton, GA.
 5. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER RESINS:** For all composite wood, engineered wood and agrifiber products (including plywood, particleboard, and medium density fiberboard), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that that the products do not contain added urea-formaldehyde resins.
 6. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER LAMINATING ADHESIVES:** For all laminating adhesives used with composite wood, engineered wood and agrifiber products (e.g., adhesives used to laminate wood veneers to an engineered wood substrate), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the adhesive products do not contain urea-formaldehyde.
 7. **FSC-CERTIFIED WOOD:**
 - a. If used in the project, provide chain of custody documents and copies of invoices regarding wood products, including whether or not such wood product is FSC-certified.
 - b. If used in the project, for assemblies, provide the percentage (by cost and by weight) of the assembly that is FSC-certified wood.
 - c. If used in the project, for assemblies, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the percentage that is FSC-certified wood.
 8. **GREEN SEAL COMPLIANCE:** Provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the following product types comply with the VOC limits and chemical component restrictions developed by the Green Seal organization of Washington, DC:
 - a. Interior Architectural Paints and Coatings: refer to Green Seal standard GS-11 (1st edition, May 1993)
 - b. Anti-corrosive and Anti-rust paints: refer to Green Seal standard GC-03 (2nd Edition, January 1997)
 - c. Aerosol Adhesives: refer to Green Seal standard GS-36 (1st edition, October 2000)
 9. **HIGH ALBEDO PAVING AND WALKWAY MATERIALS:** For paving and walkway materials made from concrete or brick provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying a minimum Solar Reflectance Index (SRI) value of 29. SRI



values will be calculated according to ASTM E 1980. Reflectance will be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance will be measured according to ASTM E 408 or ASTM C 1371.

10. **HIGH ALBEDO ROOFING MATERIALS:** For exposed roofing membranes, pavers, and ballast products, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following minimum Solar Reflectance Index (SRI) values:

- a. 78 for low-sloped roofing applications (slope \leq 2:12)
- b. 29 for steep-sloped roofing applications (slope $>$ 2:12)

SRI values will be calculated according to ASTM E 1980. Reflectance will be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance will be measured according to ASTM E 408 or ASTM C 1371.

Vegetated roof surfaces are exempt from the SRI criteria.

11. **LOW MERCURY LAMPS:** For all fluorescent, compact fluorescent, and HID lamps installed in the project, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying:

- a. The mercury content or content range per lamp in milligrams or picograms;
- b. The design light output per lamp (light at 40% of a lamp's useful life) in lumens; and
- c. The rated average life of the lamp in hours.

In addition, provide the total number of each lamp type installed in the project.

12. **FLOORSCORE CERTIFICATION:** For all hard surface flooring, including vinyl, linoleum, laminate flooring, wood flooring, ceramic flooring, rubber flooring, and wall base, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the current FloorScore standard requirements.
13. **CONCRETE:** Provide concrete mix design for each mix, designated by a distinct identifying code or number and signed by a Professional Engineer licensed in the state in which the concrete manufacturer or supplier is located.
14. **INTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed within the building's weather barrier, provide manufacturer's cut sheets indicating the following:
- a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Dimming capability, in range of percentages.
15. **EXTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed on site, provide manufacturer's cut sheets indicating the following:
- a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Range of field adjustability, if any.
 - e. Warranty of suitability for exterior use.



16. ALTERNATIVE TRANSPORTATION: Provide manufacturer's cut sheets and/or shop drawings for the following items installed on site:
 - a. Bike racks, including total number of bicycle slots provided.
 - b. Signage indicating parking spaces reserved for electric or low-emitting vehicles and for carpools/vanpools, including total number of signs.
17. WATER CONSERVING FIXTURES: For all water consuming plumbing fixtures and fittings, provide manufacturer's cut sheets showing maximum flow rates and/or flush rates.
18. ENERGY SAVING APPLIANCES: Provide manufacturer's cut sheets and published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the product's rating under the U.S. EPA/DOE Energy Star program, for all of the following:
 - a. Appliances (i.e., refrigerators, dishwashers, microwave ovens, televisions, clothes washers, clothes dryers, chilled water dispensers).
 - b. Office equipment (i.e., copy machines, fax machines, plotters/printers, scanners, binding and publishing equipment).
 - c. Electronics (i.e., servers, desktop computers, computer monitor displays, laptop computers, network equipment).
 - d. Commercial food service equipment
19. GLAZING: For glazing in any windows, doors, storefront and window wall systems, curtainwall systems, skylights, and partitions, provide manufacturer's cut sheets indicating the following:
 - a. Glazed area.
 - b. Visible light transmittance.
 - c. Solar heat gain coefficient.
 - d. Fenestration assembly u-factor.
20. VENTILATION: Provide manufacturer's cut sheets for the following:
 - a. Carbon dioxide monitoring systems, if any, installed to measure outside air delivery.
 - b. Air filters: for detailed requirements refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS.
21. REFRIGERATION: For all refrigeration equipment, provide manufacturer's cut sheets indicating the following:
 - a. Equipment type.
 - b. Equipment life. Default values specified by the 2007 ASHRAE Applications Handbook will be used unless otherwise demonstrated by the manufacturer's guarantee and an equivalent long-term service contract.
 - c. Refrigerant type.
 - d. Refrigerant charge in pounds of refrigerant per ton of gross cooling capacity.
 - e. Tested refrigerant leakage rate, in percent per year. A default rate of 2% will be used unless otherwise demonstrated by test data.
 - f. Tested end-of-life refrigerant loss, in percent. A default rate of 10% will be used unless otherwise demonstrated by test data.



1.7 LEED BUILDING SUBMITTAL REQUIREMENTS:

- A. The LEED BUILDING Submittal information must be assembled into one package per contract specification section(s) (or per subcontractor), and submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. Incomplete or inaccurate LEED BUILDING submittals may be used as the basis for the rejection of products or assemblies. Incomplete or inaccurate LEED BUILDING Submittals may be used as the basis for rejecting the submitted products or assemblies.

1.8 LEED ACTION PLANS:

- A. Construction Waste Management Plan- Refer to Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL for detailed submittal requirements.
- B. Construction IAQ Management Plan- Refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS for detailed submittal requirements.
- C. Erosion and Sedimentation Control Plan:
 - 1. The Plan must be in accordance with the New York State Department of Environmental Conservation (NYSDEC) or the 2003 EPA Construction General Permit, whichever is more stringent.
 - 2. The Plan must be submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
 - 3. Detailed requirements: ESC Plan
 - a. Include the Stormwater Pollution Prevention Plan, if required.
 - b. Identify the party responsible for Plan monitoring and documentation. The party must be regularly on site.
 - c. Describe all site work that will be implemented on the project.
 - d. Provide site plan with location of ESC measures, including, but not limited to, stormwater quantity controls, stormwater quality controls, stabilized construction entrances, washdown areas, and inlet/catch basin protection.
 - e. Describe the inspection and maintenance of the ESC measures. Provide a construction schedule indicating weekly site review.
 - f. Describe reporting and documentation measures.
 - 4. Detailed requirements: ESC Measures
 - 5. Submittal requirements: ESC Tracking Log
 - a. Note date of major rain events, describe damage, describe any repairs or maintenance performed, and note responsible party.
 - b. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party.
 - c. Submit monthly.
 - 6. Implementation
 - a. The Contractor must implement the ESC Plan, coordinate the Plan with all affected trades, and designate one individual as the Erosion and Sedimentation Control Representative, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.



- b. The Contractor must be responsible for the provision, maintenance, and repair of all ESC measures.
- c. Demonstration. The Contractor must provide on-site instruction of proper construction practices required to prevent erosion and sedimentation.
- d. Meetings. Urgent or ongoing ESC issues will be discussed at weekly on-site job meetings.

1.9 QUALITY ASSURANCE:

- A. The Contractor must implement all LEED Action Plans, coordinate the Plans and LEED Building Submittals with all affected trades, and designate one individual as the Sustainable Construction Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of LEED activities with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. Responsibilities of Contractor's Subcontractors: The Contractor is responsible for his/her subcontractors complying with the LEED Action Plans and for providing required LEED documentation as required for the project.
- C. Distribution and Compilation: The Contractor is responsible for distributing the EBMCF and any other forms or templates required for the subcontractors to record LEED documentation. The Contractor also be responsible for collecting and compiling EBMCF information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. Meetings: Sustainable design and construction issues must be discussed at the following meetings:
 - 1. Demolition kick-off meeting
 - 2. Construction kick-off meeting
 - 3. Construction kick-off meeting for LEED (independent meeting)
 - 4. Weekly job-site progress and coordination meetings
 - 5. Closeout meeting

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13.03



ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM

Contractor Name: _____
Contractor Contact: _____
Telephone Number: _____

Project Name: _____
Project I.D.: _____

Product/Manufacturer	Material Cost ¹	Recycled Content			Regional ⁴			Rapidly Renewable ⁷		VOC content ⁸		Flooring ⁹	Wood	
		Pre-Consumer (% by wt) ²	Post-Consumer (% by wt) ³	Total % (½ Pre + Post)	Location & Distance to Extraction ⁵	Location & Distance to Manufacture ⁶	Extracted & Manuf. (% by wt)	Material	% by wt	*VOC content listed	*VOC content allowed	*Green Label or FloorScore	*Added urea formaldehyde (Yes/No) ¹⁰	FSC Certified ¹¹ (% by wt)

¹ **Material Cost:** As it appears on the manufacturer's or distributor's invoice to the contractor or subcontractor. Does not include labor or equipment costs associated with installation.

² **Pre-Consumer Recycled Content:** Industrial/manufacturing waste material (e.g., fly-ash and synthetic gypsum, both waste products from coal burning electricity plants) diverted from landfill and incorporated into a finished product. Scrap raw materials that can be reused in the same manufacturing process from which they are recovered are not considered Pre-Consumer Recycled Content.

³ **Post-Consumer Recycled Content:** Material or product that has served its intended consumer use (e.g., an empty plastic bottle) and has been diverted from landfill and incorporated into a finished product.

⁴ **Regional:** Refers to a material/product that is BOTH extracted AND manufactured within 500 miles of the Project site. Record this information ONLY for materials/products meeting BOTH of these criteria.

⁵ **Extraction:** Refers to the location from which the raw resources used in a building product are extracted, harvested, or recovered.

⁶ **Manufacture:** Refers to the location of the final assembly of components into a building product that is furnished and installed by the Contractor.

⁷ **Rapidly Renewable:** Refers to materials/products derived from agricultural products that are typically harvested within a ten-year or shorter cycle.

⁸ **VOC Content:** The quantity of volatile organic compounds contained in adhesives, sealants, paints and architectural coatings. Reported in grams/liter or lbs/gallon, less water.

⁹ **Flooring:** For carpet, indicate Carpet and Rug Institute (CRI) Green Label Plus certification. For carpet cushion, indicate CRI Green Label certification. For all flooring except unfinished/untreated wood and mineral-based flooring (tile, masonry, terrazzo, cut stone) without organic-based coatings or sealants, indicate Resilient Floor Covering Institute FloorScore rating. VOC limits for adhesives, sealants, etc. still apply.

¹⁰ **Added Urea Formaldehyde:** Applies to composite wood and agrifiber products only (plywood, particleboard, MDF, OSB, wheatboard, strawboard). Resins or binders with added urea formaldehyde are prohibited.

¹¹ **FSC Certified:** Certification from the Forest Stewardship Council. This column is only applicable to wood products.

* Applies only to materials/products installed within the weather barrier.

Contractor Certification:
I, _____ a duly authorized representative of _____ (the Contractor) hereby certify that the material information contained herein is an accurate representation of the material qualifications to be provided by the Contractor as components of the final building construction. Furthermore, I understand that any change in such qualifications during the purchasing period will require prior written approval from the Commissioner.

Signature of Authorized Representative: _____ Date: _____



**SECTION 01 81 13.04
SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.04

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

A. LEED BUILDING - GENERAL REQUIREMENTS:

The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED™ Green Building rating. Specific Project requirements related to this goal are listed in the applicable paragraphs of this section of the General Conditions. The Contractor must ensure that these requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, will not be allowed if such changes compromise the stated LEED BUILDING criteria.

B. This Section includes:

1. Definitions
2. LEED Provisions
3. LEED Building Submittals
4. LEED Building Submittal Requirements
5. LEED Action Plan
6. VOC Requirements for Interior Adhesives and Sealants
7. VOC Requirements for Interior Paints and Coatings
8. Low-Emitting Materials, Flooring
9. Low-Emitting Materials, Composite Wood
10. Low-Emitting Materials, Ceilings, Walls, Thermals and Acoustic Insulation
11. Low-Emitting Materials, Furniture
12. Low-Emitting Materials, Exterior Applied Products
13. Low-Emitting Materials, Additional Low-Emitting Requirements

C. This Section includes requirements for Volatile Organic Compound (VOC) emissions and content in specific materials used within the Project.

D. All sections in the Project Specifications with adhesives, sealant or sealant primer applications, paints, coatings, flooring, composite wood, ceilings, walls, thermal and acoustic insulation, furniture, and for healthcare and schools, exterior applied products, must follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications regarding adhesives, sealant or sealant applications, paints, coatings, flooring, composite wood, ceilings, walls, thermal and acoustic insulation, furniture, and for healthcare and schools, exterior applied products, the requirements set forth in this Section will prevail.



1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- B. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- C. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS
- D. Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

Adhesive	Any substance used to bond one surface to another by attachment. Includes adhesive primers and adhesive bonding primers.
Aerosol Adhesive	Any adhesive packaged as an aerosol with a spray mechanism permanently housed in a non-refillable can designed for hand-held application without the need for ancillary equipment
Agrifiber Products	Products derived from recovered agricultural waste fiber from sources such as cereal straw, sugarcane bagasse, sunflower husk, walnut shells, coconut husks and agricultural prunings, processed and mixed with resins to produce panels with characteristics similar to composite wood.
Bio-based materials	Composed in whole or in significant part of biological products, renewable agricultural materials or forestry materials, and must meet the Sustainable Agriculture Network’s Sustainable Agriculture Standard. Bio-based raw materials must be tested using ASTM Test Method D6866 and be legally harvested, as defined by the exporting and receiving country. Exclude hide products, such as leather and other animal skin material.
Building Exterior	A structure’s primary and secondary weatherproofing system, including waterproofing membranes and air- and water-resistant barrier materials, and all building elements outside that system.
Building Interior	Everything inside a structure’s weatherproofing membrane.
Carcinogen	A chemical listed as a known, probable, reasonably anticipated, or possible human carcinogen by the International Agency for Research on Cancer



	(IARC) (Groups 1, 2A, and 2B), the National Toxicology Program (NTP) (Groups 1 and 2), the U.S. Environmental Protection Agency (EPA) Integrated Risk Information System (IRIS) (weight-of-evidence classifications A, B1, B2, and C, carcinogenic, likely to be carcinogenic, and suggestive evidence of carcinogenicity or carcinogen potential), or the Occupational Safety and Health Administration (OSHA).
Certified Wood	See Forest Stewardship Council (FSC) Certified Wood.
Clear Wood Finish	Clear/semi-transparent coating applied to wood substrates to provide a transparent or translucent solid film.
Coating	Liquid, liquefiable or mastic composition that is converted to a solid adherent film after application to a substrate as a thin layer; and is used for decorating, protecting, identifying or to serve some functional purpose such as the filling or concealing of surface irregularities or the modification of light and heat radiation characteristics; and is intended for on-site application to interior or exterior surfaces of buildings. Does not include stains, clear finishes, recycled latex paint, specialty (industrial, marine or automotive) coatings or paint sold in aerosol cans.
Composite Wood	Products composed of wood or plant particles or fibers bonded by a synthetic resin or binder to produce panels such as plywood, particleboard, and medium density fiberboard (MDF). Does not include hardboard, structural panels, glued laminated timber, prefabricated wood I-joists or finger-jointed lumber.
Cradle-to-Gate Assessment	Analysis of a product’s partial life cycle, from resource extraction to the factory gate, before it is transported for distribution and sale.
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.



Enclosure	The exterior plus semi-exterior portions of the building. Exterior consists of the elements of a building that separate conditioned spaces from the outside (i.e., the wall assembly). Semi-exterior consists of the elements of a building that separate conditioned space from unconditioned space or that encloses semi-heated space through which thermal energy may be transferred to or from the exterior or conditioned or unconditioned spaces (e.g., attic, crawl space, basement).
Environmental Product Declaration (EPD)	A statement that the item meets the environmental requirements of, ISO 14025, 14040 and EN 15804, or ISO 21930 and have at least a cradle-to-gate scope.
Extended Producer Responsibility	A waste management strategy, also known as closed-loop program or product take-back, where the manufacturer's responsibility for a product is extended to the post-consumer stage of the product's life-cycle.
Floor Coating	Opaque coating applied to flooring. Excludes industrial maintenance coatings.
Forest Stewardship Council (FSC) Certified Wood	Wood-based materials and products certified in accordance with the Forest Stewardship Council's principles and criteria.
Hazardous Air Pollutant	Any compound listed by the U.S. EPA in the Clean Air Act Section 112(b)(1) as a hazardous air pollutant.
Inherently Non-Emitting Materials	Products that are inherently non-emitting sources of VOCs, including stone, ceramic, powder-coated metals, plated or anodized metals, lass, concrete, clay brick, unfinished solid wood, untreated solid wood. These materials are considered compliant without VOC testing if they do not include integral organic-based surface coatings, binders or sealants.
Lacquer	Clear/semi-transparent coating formulated with cellulosic or synthetic resins to dry by evaporation without chemical reaction and provide a solid, protective film.



LEED	The Leadership in Energy & Environmental Design rating system developed by the United States Green Building Council (USGBC).
Life-Cycle Assessment	An evaluation of the environmental effects of a product from cradle to grave, as defined by ISO 14040-2006 and ISO 14044-2006.
Mutagen	A chemical that meets the criteria for category 1, chemicals known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans, under the Harmonized System for the Classification of Chemicals Which Cause Mutations in Germ Cells (United Nations Economic Commission for Europe, Globally Harmonized System of Classification and Labeling of Chemicals).
Ozone-Depleting Compounds	A compound with an ozone-depletion potential greater than 0.1 (CFC 11=1) according to the U.S. EPA list of Class I and Class II Ozone-Depleting Substances.
Paint	<p>A pigmented coating. For the purposes of this specification, paint primers are considered to be paints.</p> <p>A. Flat Coating or Paint: Has a gloss of less than 15 (using an 85-degree meter) or less than 5 (using a 60-degree meter).</p> <p>B. Non-Flat Coating or Paint: Has a gloss of greater than or equal to 15 (using an 85-degree meter) or greater than or equal to 5 (using a 60-degree meter).</p> <p>C. Non-Flat High-Gloss Coating or Paint: Has a gloss of greater than or equal to 70 (using a 60-degree meter).</p> <p>Anti-Corrosive / Rust Preventative Paint: Coating formulated and recommended for use in preventing the corrosion of ferrous metal substrates.</p>
Permanently Installed Building Product	See Product.
Primer	Coating that is formulated and recommended for one or more of the following purposes: to provide a firm bond between the substrate and a subsequent coating; to prevent a subsequent coating from being absorbed into the substrate; to prevent harm to a subsequent coating from materials in the



	substrate; or to provide a smooth surface for application of a subsequent coating.
Product	An item that arrives on the Project site either as a finished element ready for installation or as a component to another item assembled on-site. The product unit is defined by the functional requirement for use in the Project; this includes the physical components and services needed to serve the intended function of the permanently installed building product. Similar products within a specification will each contribute as a separate product.
Product-Specific Declaration	Products with a publicly available, critically reviewed life-cycle assessment conforming to ISO 14044 that have at least a cradle-to-gate scope.
Recycled Content	<p>The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer) or after consumer use (post-consumer). Recycled content claims for products must conform to the definition in ISO 14021-1999, Environmental Labels and Declarations, Self-Declared Environmental Claims (Type II Environmental Labeling).</p> <p>Spills and scraps from the original manufacturing process that are combined with other constituents after a minimal amount of reprocessing for use in further production of the same product are not recycled materials.</p> <p>Discarded materials from one manufacturing process that are used as constituents in another manufacturing process are pre-consumer recycled materials.</p> <p>“Pre-consumer” may also be referred to as “post-industrial”.</p>



Regionally Manufactured Materials	Materials that are manufactured, distributed and purchased within a radius of 100 miles from the Project location. Manufacturing refers to all points of manufacture for an assembly of components.
Regionally Extracted, Harvested, or Recovered Materials	Materials which are extracted, harvested or recovered, manufactured, distributed and purchased within a radius of 100 miles from the Project site.
Reproductive Toxin	A chemical listed as a reproductive toxin (including developmental, female, and male toxins) by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (California Code of Regulations, Title 22, Division 2, Subdivision 1, Chapter 3, Sections 1200, et. Seq.).
Sanding Sealer	Clear/semi-transparent coating formulated to seal bare wood. Can be abraded to create a smooth surface for subsequent coatings. Does not include sanding sealers that are lacquers (see Clear Wood Finish above).
Sealant	Any material with adhesive properties, formulated primarily to fill, seal, or waterproof gaps or joints between surfaces. Includes sealant primers and caulks.
Shellac	Clear or pigmented coating formulated solely with the resinous secretions of the lac beetle, thinned with alcohol and formulated to dry by evaporation without chemical reaction. Excludes floor applications.
Solar Reflectance Index (SRI)	A measure of a material's ability to reflect solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is equal to 0, and a standard white (reflectance 0.80, emittance of 0.90) is equal to 100.
Stain	Clear semi-transparent/opaque coating formulated to change the color but not conceal the grain pattern or texture of the substrate.
Varnish	Clear/semi-transparent coating, excluding lacquers and shellacs, formulated to dry by chemical reaction on exposure to air. May contain small amounts of pigment.



Volatile Aromatic Compound	Any hydrocarbon compound containing one or more 6-carbone benzene rings, and having an initial boiling point less than or equal to 280 degrees Celsius measured at standard conditions of temperature and pressure.
Volatile Organic Compound (VOC)	Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs. Waterproofing Sealer: A coating that prevents the penetration of water into porous substrates.

1.5 LEED PROVISIONS:

- A. Refer to the Addendum for the LEED rating to be achieved for this Project. The provisions to achieve this LEED rating are integrated within the Project construction documents and specifications. Additional LEED requirements are met through aspects of the Project design, including material and equipment selections, which may not be specifically identified as LEED Building requirements. Compliance with the requirements needed to obtain LEED prerequisites and credits will be used as one criterion to evaluate substitution requests.

1.6 LEED BUILDING SUBMITTALS:

- A. Scope: LEED Building Submittals are required for all permanently installed materials included in General Construction work. For Plumbing, Mechanical and Electrical work, LEED Building Submittals are only required for field-applied adhesives, sealants, paints and coatings. Voluntary inclusion of system components such as piping, pipe insulation, ducts, conduits, plumbing fixtures, faucets and lamp housings must be consistently applied to the Project’s LEED credits. Submit all required LEED Building Submittals in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
- B. Applicability: The extent of the LEED Building Submittals varies depending on the specification section. Applicable LEED Building Submittals are listed under the “LEED Building Submittals” heading in each specification section. The detailed requirements for the LEED Building Submittals are defined in Sub-Section 1.6 C below.
- C. Detailed Requirements: Sub-Sections 1.6 C.1 through 1.6 C.18 below define the information and documents to be submitted for each type of LEED Building Submittal as identified in the LEED Building Submittals heading in each specification section:
 - 1. LEED v4 Material and Resources (MR) Credits Calculator for Building Product Disclosure and Optimization (Disclosure and Optimization Calculator): With each submittal of a product permanently installed in the Project, the Contractor is responsible for the completion of the



Disclosure and Optimization Calculator, which can be found on USGBC's website. The Contractor must maintain an updated Disclosure and Optimization Calculator for all applicable products throughout the Project duration and submit the updated calculator on a monthly basis.

- a. The Disclosure and Optimization Calculator will record the information outlined in Items b.-c. below for all permanently installed products, the information outlined in Item d. below for all permanently installed concrete mixes, and the information outlined in Items e.-i. below for all permanently installed products that have the content, disclosure or optimization characteristics described herein:
- b. Cost breakdowns for the materials included in the Contractor or subcontractor's scope of work. Cost reporting must include itemized material costs (excluding the Contractor's labor, equipment, overhead and profit).
- c. The percentages (by weight) of post-consumer and/or post-industrial recycled content in the supplied product(s).
 - 1) For each product with recycled content, also indicate the total recycled content value ($1/2 \times \text{pre-consumer percentage} \times \text{product value} + 1 \times \text{post-consumer percentage} \times \text{product value} = \text{total recycled content value}$).
 - 2) See additional requirements for concrete in section 1.6.C.1.d below.
- d. The percentage (by weight), relative to the total weight of cementitious materials, of supplementary cementitious materials or pozzolans such as fly ash used in each concrete mix used in the Project.
 - 1) For each concrete mix, submit a complete breakdown of all components, by weight and by cost.
- e. Identification (Yes/No) of materials manufactured, distributed and purchased within 100 miles of the Project site AND containing raw materials harvested or extracted within 100 miles of the Project site, if used in the Project, as well as the following information:
 - 1) Indicate the percentage by weight, relative to the total weight of the product that meets these criteria.
 - 2) Indicate the point of harvest/extraction/recovery of regional raw materials, the point of final assembly of regional manufactured products, and the distance from each point to the Project site.
- f. The percentage (by cost) of "Forest Stewardship Council (FSC) Certified" wood products, if used in the Project.
 - 1) Record all new wood products, indicating which are FSC-certified. Do not record reclaimed, salvaged, or recycled FSC-certified wood products.
 - 2) Reclaimed, salvaged, or recycled FSC-certified wood may be recorded as post-consumer recycled content.
- g. The number or percentage of products with Environmental Product Declarations (EPD), with fractional or multiplied values as indicated below. If a product used in the Project has an EPD Declaration, submit one of the following:
 - 1) EPD:
 - i. Product-Specific Declaration: Valued as one quarter (1/4) of a product
 - ii. Industry-Wide (Generic) EPD: Valued as one half (1/2) of a product
 - iii. Product-Specific Type III EPD: Valued as one whole product
 - 2) Documentation of third-party certification of impact reduction below industry average for at least three of the following categories, valued at 100%:
 - i. Global warming potential (greenhouse gases), in CO₂e;
 - ii. Depletion of the stratospheric ozone layer, in kg CFC-11;
 - iii. Acidification of land and water sources, in moles H⁺ or kg SO₂;
 - iv. Eutrophication, in kg nitrogen or kg phosphate;
 - v. Formation of tropospheric ozone, in kg NO_x or kg ethene; and depletion of nonrenewable energy resources, in MJ.



- 3) For 1) and 2) above, if a product is also sourced (extracted, manufactured, purchased) within 100 miles of the site, it is valued as two times the whole product.
 - 4) For 1) and 2) above, structure and enclosure materials may not constitute more than 30% of the value of compliant building products.
- h. The number or percentage of products for which Sourcing of Raw Materials has been documented, with fractional or multiplied values as indicated below. If a product used in the Project has documented Sourcing of Raw Materials, submit one of the following:
- 1) Corporate sustainability report (CSR). Submit one of the following:
 - i. Manufacturer's self-declared report: valued as half of a product
 - ii. Third-party verified CSR which include environmental impacts of extraction operations and activities associated with the manufacturer's product and the product's supply chain: valued as one whole product:
 1. Global Reporting Initiative (GRI) Sustainability Report
 2. Organisation for Economic Co-operation and Development (OECD) Guidelines for Multinational Enterprises
 3. U.N. Global Compact: Communication of Progress
 4. ISO 26000: 2010 Guidance on Social Responsibility
 5. Other USGBC approved programs meeting the CSR criteria
 - 2) Documentation of at least one of the responsible extraction criteria below:
 - i. Extended producer responsibility program, valued as half of a product
 - ii. Bio-based materials, valued as one whole product
 - iii. Certified Wood: Wood-based materials include all materials made from wood, including engineered wood products and wood-based panel products, valued as one whole product
 - iv. Material Reuse: Materials may be salvaged, refurbished, or reused, valued as one whole product.
 - v. Recycled content. The sum of post-consumer recycled content plus one-half the pre-consumer recycled content, based on cost, valued as one whole product.
 - vi. Other USGBC approved programs meeting leadership extraction criteria
 - 3) For 1) and 2) above, if a product is also sourced (extracted, manufactured, purchased) within 100 miles of the site: valued as two times the whole product.
 - 4) For 1) and 2) above, structure and enclosure materials may not constitute more than 30% of the value of compliant building products. Products meeting multiple criteria may only be counted once.
- i. The number or percentage of products for which Material Ingredients have been disclosed, with fractional or multiplied values as indicated below. If a product used in the Project discloses its Material Ingredients, submit one of the following:
- 1) Chemical inventory of the product to at least 0.1% (1000 ppm), documented by one of the following:
 - i. Manufacturer Inventory
 - ii. Health Product Declarations (HPDs)
 - iii. Cradle to Cradle (C2C) certifications
 - iv. Declare product labels
 - v. ANSI/BIFMA e3 Furniture Sustainability Standard (Furniture may be included, providing it is included consistently in all MR Credits.)



- 2) Documentation of compliance with one of the following material ingredient optimization criteria programs:
 - i. GreenScreen benchmarks
 - ii. Cradle to Cradle certifications
 - iii. REACH optimizations
 - iv. Other USGBC approved programs meeting building product optimization criteria
 - 3) Documentation that the product is sourced from a manufacturer that meets all of the below supply chain optimization criteria:
 - i. Manufacturer engages in validated and robust safety, health, hazard and risk programs which at a minimum document at least 99% (by weight) of the ingredients used to make the building product or building material
 - ii. Manufacturer provides independent third party verification of the following conditions for their supply chain, at a minimum:
 1. Processes are in place to communicate and transparently prioritize chemical ingredients along the supply chain according to available hazard, exposure and use information to identify those that require more detailed evaluation
 2. Processes are in place to identify, document, and communicate information on health, safety and environmental characteristics of chemical ingredients
 3. Processes are in place to implement measures to manage the health, safety and environmental hazard and risk of chemical ingredients
 4. Processes are in place to optimize health, safety and environmental impacts when designing and improving chemical ingredients
 5. Processes are in place to communicate, receive and evaluate chemical ingredient safety and stewardship information along the supply chain
 6. Safety and stewardship information about the chemical ingredients is publicly available from all points along the supply chain
 - 4) For 2) and 3) above, if a product is also sourced (extracted, manufactured, purchased) within 100 miles of the site: valued as two times the whole product. Products compliant with both 2) and 3) may only be counted once.
 - 5) For 1), 2), and 3) above, structure and enclosure materials may not constitute more than 30% of the value of compliant building products.
2. LEED v4 Indoor Environmental Quality Credit Low-Emitting Materials Calculator (EQ Calculator). With each relevant product submittal, the Contractor is responsible for the completion of the EQ Calculator, which can be found on USGBC's website. The Contractor must maintain an updated EQ Calculator throughout the Project duration for all applicable products and submit the updated calculator on a monthly basis.
- a. The EQ Calculator must record information for all relevant products as outlined below. Include the following documentation. Detailed requirements are listed in b. – j. below.
 - 1) Volume used of all field applied interior adhesives, sealants, paints & coatings.
 - 2) VOC content of all field-applied interior adhesives, sealants, paints, and coatings, listed in grams/liter or lbs./gallon, less water.
 - 3) General Emissions Evaluation for more than 90 percent of all field-applied interior paints, coatings, adhesives, and sealants, by volume, and for 100 percent of all flooring, ceilings, walls, and thermal and acoustic insulation.
 - 4) Composite Wood Evaluation for all composite wood not covered by other categories.
 - 5) Furniture Evaluation for 90% of all furniture, by cost.



- 6) For schools/healthcare only: Exterior-Applied Products Evaluation for 90% of all exterior applied materials, measured by volume. All batt insulation products must contain no added formaldehyde.
- b. VOC REQUIREMENTS, GENERAL: The following materials must meet the listed compliance requirements for emissions and content standards, for all applicable categories. All products must comply with each applicable threshold requirement. Refer to LEED BD+C Reference Guide, EQ Credit Low-Emitting Materials for additional guidance.
- 1) General Emissions Requirements: Products must demonstrate they have been tested and determined compliant in accordance with California Department of Public Health (CDPH), Standard Method v1.1-2010 or v1.2-2017, using the applicable exposure scenario, and stating the range of total VOCs (TVOC) after 14 days measured as specified in the CDPH Standard Method v1.1 as follows:
 - i. 0.5mg/m³ or less;
 - ii. between 0.5 and 5.0 mg/m³; or,
 - iii. 0.50 mg/m³ or more
 - 2) No product may contain any ingredients that are carcinogens, mutagens, reproductive toxins, persistent bioaccumulative compounds, hazardous air pollutants, or ozone-depleting compounds. An exception will be made for titanium dioxide and, for products that are pre-tinted by the manufacturer, carbon black, which must be less than or equal to 1% by weight of the product.
 - 3) No product may contain the following:
 - i. methylene chloride
 - ii. 1,1,1-trichloroethane
 - iii. benzene
 - iv. toluene
 - v. ethylbenzene
 - vi. vinyl chloride
 - vii. naphthalene
 - viii. 1,2-dichlorobenzene
 - ix. di (2-ethylhexyl) phthalate
 - x. butyl benzyl phthalate
 - xi. di-n-butyl phthalate
 - xii. di-n-octyl phthalate
 - xiii. diethyl phthalate
 - xiv. dimethyl phthalate
 - xv. isophorone
 - xvi. antimony
 - xvii. cadmium
 - xviii. hexavalent chromium
 - xix. lead
 - xx. mercury
 - xxi. formaldehyde
 - xxii. methyl ethyl ketone
 - xxiii. methyl isobutyl ketone
 - xxiv. acrolein
 - xxv. acrylonitrile
 - 4) No product may contain more than 1.0% by weight of sum total of volatile aromatic compounds.
- c. VOC REQUIREMENTS FOR INTERIOR ADHESIVES AND SEALANTS:
- 1) For field applications that are inside the weatherproofing system, use adhesives and sealants that comply with the following limits for VOC content when calculated



according to South Coast Air Quality Management District (SCAQMD) Rule #1168 requirements in effect on July 1, 2005, and rule amendment date January 7, 2005:

	Allowable VOC Content (g/L):
Architectural Applications:	
Indoor carpet adhesives	50
Carpet pad adhesives	50
Outdoor carpet adhesives	150
Wood flooring adhesives	100
Rubber floor adhesives	60
Subfloor adhesives	50
Ceramic tile adhesives	65
VCT and asphalt tile adhesives	50
Dry wall and panel adhesives	50
Cove base adhesives	50
Multipurpose construction adhesives	70
Structural glazing adhesives	100
Single ply roof membrane adhesives	250
Specialty Applications:	
PVC welding	510
CPVC welding	490
ABS welding	325
Plastic cement welding	250
Adhesive primer for plastic	550
Computer diskette manufacturing	350
Contact adhesive	80
Special purpose contact adhesive	250
Tire retread	100
Adhesive primer for traffic marking tape	150
Structural wood member adhesive	140
Sheet applied rubber lining operations specialty	850
Top and Trim adhesive	250
Substrate Specific Applications:	
Metal to metal substrate specific adhesives	30
Plastic foam substrate specific adhesives	50
Porous material (except wood) substrate specific adhesives	50
Wood substrate specific adhesives	30
Fiberglass substrate specific adhesives	80
Sealants:	
Architectural sealant	250
Marine deck sealant	760
Nonmember roof sealant	300
Roadway sealant	250
Single-ply roof membrane sealant	450
Other sealant	420
Sealant Primers:	
Architectural non-porous sealant primer	250
Architectural porous sealant primer	775



Modified bituminous sealant primer	500
Marine deck sealant primer	760
Other sealant primer	750
Other	
Other adhesives, adhesive bonding primers, adhesive primers or any other primers	250

- 2) For field applications that are inside the weatherproofing system, a minimum of 90 percent of adhesives and sealants, by volume, must comply with the requirements of the CDPH "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
- d. VOC REQUIREMENTS FOR INTERIOR PAINTS AND COATINGS:
- 1) For field applications that are inside the weatherproofing system, use paints and coatings that comply with the following limits for VOC content when calculated according to the California Air Resources Board (CARB) 2007, Suggested Control Measure (SCM) for Architectural Coatings, or the SCAQMD Rule #1113, effective June 3, 2011.

Product Type:	Allowable VOC Content (g/L):
Bond Breaker	350
Clear wood finishes - Varnish	275
Clear wood finishes – Sanding Sealer	275
Clear wood finishes - Lacquer	275
Colorant – Architectural Coatings, excluding IM coatings	50
Colorant – Solvent Based IM	600
Colorant - Waterborne IM	50
Concrete – Curing compounds	100
Concrete – Curing compounds for roadways & bridges	350
Concrete surface retarder	50
Driveway Sealer	50
Dry-fog coatings	50
Faux finishing coatings - Clear topcoat	100
Faux finishing coatings – Decorative Coatings	350
Faux finishing coatings - Glazes	350
Faux finishing coatings - Japan	350
Faux finishing coatings – Trowel applied coatings	50
Fire-proof coatings	150
Flats	50
Floor coatings	50
Form release compounds	100
Graphic arts (sign) coatings	150
Industrial maintenance coatings	100
Industrial maintenance coatings – High temperature IM coatings	420
Industrial maintenance coatings – Non-sacrificial anti-graffiti coatings	100
Industrial maintenance coatings – Zinc rich IM primers	100



Magnesite cement coatings	450
Mastic coatings	100
Metallic pigmented coatings	150
Multi-color coatings	250
Non-flat coatings	50
Pre-treatment wash primers	420
Primers, sealers and undercoaters	100
Reactive penetrating sealers	350
Recycled coatings	250
Roof coatings	50
Roof coatings, aluminum	100
Roof primers, bituminous	350
Rust preventative coatings	100
Stone consolidant	450
Sacrificial anti-graffiti coatings	50
Shellac- Clear	730
Shellac – Pigmented	550
Specialty primers	100
Stains	100
Stains, interior	250
Swimming pool coatings – repair	340
Swimming pool coatings – other	340
Traffic Coatings	100
Waterproofing sealers	100
Waterproofing concrete/masonry sealers	100
Wood preservatives	350
Low solids coatings	120

- 2) For field applications that are inside the weatherproofing system, 90 percent of paints and coatings must comply with the requirements of the CDPH's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
 - e. LOW-EMITTING MATERIALS, FLOORING: Flooring must comply with the requirements of the CDPH's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
 - f. LOW-EMITTING MATERIALS, COMPOSITE WOOD: Composite wood, agrifiber products, and adhesives must be made using ultra-low-emitting formaldehyde (ULEF) resins as defined in the CARB's "Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Products" or must be made with no added formaldehyde.
 - g. LOW-EMITTING MATERIALS, CEILINGS, WALLS, THERMAL, AND ACOUSTIC INSULATION: Ceilings, walls, and thermal and acoustic insulation must comply with the requirements of the CDPH's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."
 - h. LOW-EMITTING MATERIALS, FURNITURE: At least 90 percent of furniture, measured by cost, will be tested in accordance with ANSI/BIFMA Standard Method M7.1-2011; comply with ANSI/BIFMA e3-2011 Furniture Sustainability Standard, Sections 7.6.1 and 7.6.2, using either the concentration modeling approach or the emissions factor approach; and model the test results using the open plan, private office, or seating scenario in ANSI/BIFMA M7.1, as appropriate.
 - i. LOW-EMITTING MATERIALS, EXTERIOR APPLIED MATERIALS (HEALTHCARE/ SCHOOLS ONLY): At least 90 percent of exterior applied materials, measured by volume,



must comply with the requirements of the CDPH's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

- 1) The following materials are prohibited and do not count toward total percentage compliance:
 - a) Hot-mopped asphalt for roofing.
 - b) Coal tar sealants for parking lots and other paved surfaces.
- j. **LOW-EMITTING MATERIALS, ADDITIONAL LOW-EMITTING REQUIREMENTS:** If the applicable regulation requires subtraction of exempt compounds, any content of intentionally added exempt compounds larger than 1% weight by mass (total exempt compounds) must be disclosed.
 - 1) If a product cannot reasonably be tested as specified above, testing of VOC content must comply with ASTM D2369-10; ISO 11890, part 1; ASTM D6886-03; or ISO 11890-2.
 - 2) Methylene chloride and perchloroethylene may not be intentionally added in adhesives, sealants, paints or coatings.
3. **BACK-UP DOCUMENTATION:** For each material listed in the Disclosure and Optimization Calculator or the EQ Calculator, provide and submit in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, including but not limited to the documentation to certify the material's LEED Building attributes, as applicable:
 - a. **INSTALLATION ON LOCATION:** Submit indication of the installation location of products other than adhesives, sealants, paints and coatings. Installation locations should be categorized as one of the following:
 - 1) Ceiling
 - 2) Wall
 - 3) Floor
 - 4) Subfloor
 - 5) Built-In Cabinetry
 - 6) Free-Standing Cabinetry
 - 7) Vertical Structural Elements
 - 8) Overhead Structural Elements
 - b. **RECYCLED CONTENT:** Submit published product literature or letter of certification on the manufacturer's letterhead certifying the amounts of post-consumer and/or post-industrial content.
 - c. **REGIONAL SOURCING (WITHIN 100 MILES):** Submit published product literature or letter of certification on the manufacturer's letterhead indicating the city/state where the manufacturing plant is located, where each of the raw materials in the product were extracted, harvested or recovered, manufactured, distributed and the distance in miles from the Project site.
 - 1) If only some of the raw materials for a particular product or assembly originate within 100 miles of the Project site, provide the percentage (by weight) that these materials comprise in the complete product.
 - d. **BUILDING PRODUCT DISCLOSURE AND OPTIMIZATION:** Submit published third-party or manufacturer's product literature or letter of certification, on the third-party or manufacturer's letterhead, certifying the documented disclosure and optimization information.
 - e. **VOC EMISSIONS AND CONTENT:** Submit Material Safety Data Sheets (MSDS), for all applicable products. Applicable products include, but are not limited to adhesives, sealants, carpets, paints and coatings, flooring, composite wood, ceilings, walls, thermal and acoustic insulation, furniture, and for healthcare and schools, exterior applied products. MSDS must



indicate the VOC emissions and content of products submitted. (If an MSDS does not include a product's VOC emissions and content, then product data sheets, manufacturer literature, or a letter of certification from the manufacturer must be submitted in addition to the MSDS to indicate the VOC emissions and content). Submit product third-party certificates and test reports, stating the testing methodology and the model, to include units that are consistent with those required. For wet-applied products, the manufacturer's documentation must state each product's classification and application according to the referenced standard's definition.

4. **PRODUCT CUT SHEETS:** Submit product cut sheets with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project.
5. **FSC-CERTIFIED WOOD:** If FSC-Certified Wood is used in the Project, submit:
 - a. Copies of vendor's invoices itemizing all new wood purchases, showing the cost for each line item.
 - b. For FSC-certified products, the vendor invoice must list product's FSC content percent and its Chain-of-Custody (CoC) certification number.
 - c. For FSC-certified products, submit the product and producer's CoC certificates.
 - d. For FSC-certified products modified on-site, submit on-site installer's CoC certification.
 - e. For assemblies, submit the percentage (by cost and by weight) of the assembly that is FSC-certified wood and published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the percentage that is FSC-certified wood.
6. **HIGH ALBEDO PAVING AND WALKWAY MATERIALS:** For paving and walkway materials made from concrete or brick, submit published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying a minimum 3-year aged Solar Reflectance (SR) value of 0.28. If 3-year aged value information is not available, submit published product literature or letter verifying an initial SR value of at least 0.33 at installation.
7. **HIGH ALBEDO ROOFING MATERIALS:** For exposed roofing membranes, pavers, and ballast products, submit published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following minimum Solar Reflectance Index (SRI) values, calculated according to ASTM E 1980. Reflectance will be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance will be measured according to ASTM E 408 or ASTM C 1371. Vegetated roof surfaces are exempt from the SRI criteria.
 - a. 82 for initial SRI, or 64 for 3-year aged SRI for low-sloped roofing applications (slope \leq 2:12)
 - b. 39 for initial SRI or 32 for 3-year aged SRI for steep-sloped roofing applications (slope $>$ 2:12)
8. **LOW MERCURY LAMPS:** For all fluorescent, compact fluorescent and HID lamps installed in the Project, submit the total number of each lamp type and submit published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following information. Preheat, T-9, T-10 and T-12 fluorescents or mercury vapor high-intensity discharge (HID) lamps must not be installed in the Project. For healthcare projects only, probe-start metal halide HID lamps must not be installed in any interior spaces.
 - a. The mercury content or content range per lamp in milligrams or picograms, meeting the following criteria;

Lamp	Maximum Mercury Content (milligram)
T-8 fluorescent, eight-foot	10 mg
T-8 fluorescent, four-foot	3.5 mg
T-8 fluorescent, U-bent	6 mg
T-5 fluorescent, linear	2.5 mg
T-5 fluorescent, circular	9 mg
Compact fluorescent, nonintegral ballast	3.5 mg
Compact fluorescent, integral ballast	3.5 mg, ENERGY STAR qualified



**Department of
Design and
Construction**

High-pressure sodium, up to 400 watts	10 mg
High-pressure sodium, above 400 watts	32 mg

- b. The design light output per lamp (light at 40% of a lamp’s useful life) in lumens; and
 - c. The rated average life of the lamp in hours.
9. EXIT SIGNS: Illuminated exit signs must not contain mercury, and must use less than 5 watts of electricity.
 10. CONCRETE: Submit concrete mix design for each mix, designated by a distinct identifying code or number and signed by a Professional Engineer licensed in the state of New York.
 11. INTERIOR LIGHTING FIXTURES: For each lighting fixture type installed within the building’s weather barrier, submit manufacturer’s cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Dimming capability, in range of percentages.
 12. EXTERIOR LIGHTING FIXTURES: For each lighting fixture type installed on site, submit manufacturer’s cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Range of field adjustability, if any.
 - e. Warranty of suitability for exterior use.
 13. ALTERNATIVE TRANSPORTATION: Submit manufacturer’s cut sheets and/or shop drawings for the following items installed on site:
 - a. Bike racks, including total number of bicycle slots provided.
 - b. Signage indicating parking spaces reserved for electric or low-emitting vehicles and for carpools/vanpools, including total number of signs.
 14. WATER CONSERVING FIXTURES: For all water consuming plumbing fixtures and fittings, submit manufacturer’s cut sheets showing maximum flow rates and/or flush rates.
 15. ENERGY SAVING APPLIANCES: Submit manufacturer’s cut sheets and published product literature or letter from the manufacturer (on the manufacturer’s letterhead) verifying the product’s rating under the U.S. EPA/DOE Energy Star program, for all of the following:
 - a. Appliances (i.e., refrigerators, dishwashers, microwave ovens, televisions, clothes washers, clothes dryers, chilled water dispensers).
 - b. Office equipment (i.e., copy machines, fax machines, plotters/printers, scanners, binding and publishing equipment).
 - c. Electronics (i.e., servers, desktop computers, computer monitor displays, laptop computers, network equipment).
 - d. Commercial food service equipment.
 16. GLAZING: For glazing in any windows, doors, storefront and window wall systems, curtainwall systems, skylights, and partitions, submit manufacturer’s cut sheets indicating the following:
 - a. Glazed area.
 - b. Visible light transmittance.
 - c. Solar heat gain coefficient.
 - d. Fenestration assembly u-factor.



17. VENTILATION: Submit manufacturer's cut sheets for the following:
 - a. Carbon dioxide monitoring systems, if any, installed to measure outside air delivery.
 - b. Air filters: for detailed requirements refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS.
18. REFRIGERATION: For all refrigeration equipment, submit manufacturer's cut sheets indicating the following:
 - a. Equipment type.
 - b. Equipment life. Default values specified by the 2007 ASHRAE Applications Handbook will be used unless otherwise demonstrated by the manufacturer's guarantee and an equivalent long-term service contract.
 - c. Refrigerant type.
 - d. Refrigerant charge in pounds of refrigerant per ton of gross cooling capacity.
 - e. Tested refrigerant leakage rate, in percent per year. A default rate of 2% will be used unless otherwise demonstrated by test data.
 - f. Tested end-of-life refrigerant loss, in percent. A default rate of 10% will be used unless otherwise demonstrated by test data.

1.7 LEED BUILDING SUBMITTAL REQUIREMENTS:

- A. The LEED Building Submittal information must be assembled into one package per contract specification section(s) (or per subcontractor), and submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. Incomplete or inaccurate LEED Building Submittals may be used as the basis for the rejection of products or assemblies.
- B. All final LEED Building Submittal information with back-up documentation must be submitted within two (2) months of the Project's substantial completion. If in the Project's LEED review, the USGBC or their third party reviewer requires additional documentation as it relates to the LEED Building Submittals, the Contractor must provide the requested documentation within two (2) weeks.

1.8 LEED ACTION PLANS:

- A. Construction Waste Management Plan- Refer to Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL for detailed requirements.
- B. Construction IAQ Management Plan- Refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS for detailed requirements.
- C. Erosion and Sedimentation Control (ESC) Plan:
 1. The Plan must be in accordance with the New York State Department of Environmental Conservation (NYSDEC)'s New York State Standards and Specifications for Erosion and Sediment Control (Blue Book) or the 2012 EPA Construction General Permit, whichever is more stringent.
 2. The Plan must be submitted in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
 3. Detailed requirements: ESC Plan
 - a. Include the Stormwater Pollution Prevention Plan, if required.
 - b. Identify the party responsible for Plan monitoring and documentation. The party must be regularly on site.
 - c. Describe all site work that will be implemented on the Project and include timing of implementation.



- d. Submit site plan with location of ESC measures, including, but not limited to, stormwater quantity controls, stormwater quality controls, stabilized construction entrances, washdown areas, inlet/catch basin protection and perimeter controls.
 - e. Establish and clearly delineate construction buffer zones to avoid soil compaction and other construction damage to greenfields.
 - f. Describe the inspection and maintenance protocols of the ESC measures. Submit a construction schedule indicating weekly site review.
 - g. Describe reporting and documentation measures.
4. Detailed requirements: ESC Tracking Log
- a. Note date of major rain events, describe damage, describe any repairs or maintenance of specific control measures performed, and note responsible party.
 - b. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party. Submit date-stamped photographs, inspection reports or other recording processes.
 - c. Submit monthly.
5. Implementation
- a. Before Demolition and/or Construction begins, the Contractor will implement the ESC Plan, coordinate the Plan with all affected trades, and designate one individual as the Erosion and Sedimentation Control Representative, who will be responsible for communicating the progress of the Plan with the Commissioner monthly, and for assembling the required LEED documentation.
 - b. The Contractor is responsible for the provision, maintenance, and repair of all ESC measures. Any problems identified in site inspections must be resolved in a timely manner.
 - c. Demonstration. The Contractor must provide on-site instruction of proper construction practices required to prevent erosion and sedimentation.
 - d. All subcontractors must promptly notify the ESC Representative if damage to an ESC measure is observed.
 - e. Meetings. Urgent or ongoing ESC issues must be discussed at weekly on-site job meetings.
6. All projects, including zero lot line buildings and projects that cause minimal or even no exterior site disturbance, must have ESC Plan that meets requirements.
7. Contractor must save such original documents for the life of the Project plus seven (7) years.

1.9 QUALITY ASSURANCE:

- A. The Contractor must implement all LEED Action Plans, coordinate the Plans and LEED Building Submittals with all affected trades, and designate one individual as the Sustainable Construction Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of LEED activities with the Commissioner monthly, and for assembling the required LEED documentation. The Contractor must facilitate measurements taken by authorized parties on site for LEED compliance verification purposes.
- B. Responsibilities of Contractor's Subcontractors: The Contractor is responsible for his/her subcontractors complying with the LEED Action Plans and for providing required LEED documentation as required for the Project.
- C. Distribution and Compilation: The Contractor is responsible for distributing the LEED v4 MR Credits Calculator for Building Product Disclosure and Optimization, the LEED v4 EQ Credit Low-Emitting Materials Calculator, and any other forms or templates required for the subcontractors to record LEED documentation. The Contractor is also responsible for collecting and compiling Building Product Disclosure and Optimization and Low-Emitting Materials information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. Meetings: Sustainable design and construction issues must be discussed at the following meetings in accordance with Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION:
 1. Demolition kick-off meeting



2. Construction kick-off meeting
3. Construction kick-off meeting for LEED (independent meeting)
4. Weekly job-site progress and coordination meetings
5. Closeout meeting

1.10 REFERENCES:

- A. New York State Standards and Specifications for Erosion and Sediment Control, amended November 2016: http://www.dec.ny.gov/docs/water_pdf/2016nysstanec.pdf
- B. 2012 EPA Construction General Permit: <https://www.epa.gov/npdes/epas-2012-construction-general-permit-cgp-and-related-documents>
- C. South Coast Air Quality Management District (SCAQMD), Rule 1168: www.aqmd.gov
- D. South Coast Air Quality Management District (SCAQMD), Rule 1113: www.aqmd.gov
- E. CDPH Standard Method v1.1-2010: www.cal-iaq.org
- F. ISO 17025: www.iso.org
- G. ISO Guide 65: www.iso.org
- H. CARB 93120 ATCM: arb.ca.gov/toxics/compwood/compwood.htm
- I. ANSI/BIFMA M7.1 Standard Test Method for Determining VOC Emissions from Office Furniture Systems, Components and Seating: bifma.org
- J. ANSI/BIFMA e3-2011 Furniture Sustainability Standard: bifma.org
- K. ISO 14021–1999, Environmental labels and declarations—Self Declared Claims (Type II Environmental Labeling): www.iso.org
- L. ISO 14025–2006, Environmental labels and declarations (Type III Environmental Labeling): www.iso.org
- M. ISO 14040–2006, Environmental management, Life cycle assessment principles, and frameworks: www.iso.org
- N. ISO 14044–2006, Environmental management, Life cycle assessment requirements, and guidelines: www.iso.org
- O. International Standard ISO 21930–2007 Sustainability in building construction—Environmental declaration of building products: www.iso.org
- P. Federal Trade Commission, Guides for the Use of Environmental Marketing Claims, 16 CFR 260.7 (e): www.ftc.gov/bcp/gnrule/guides980427.htm
- Q. Global Reporting Initiative (GRI) Sustainability Report: www.globalreporting.org/
- R. Organisation for Economic Co-operation and Development (OECD) Guidelines for Multinational Enterprises: www.oecd.org/daf/internationalinvestment/guidelinesformultinationalenterprises/
- S. U.N. Global Compact, Communication on Progress: www.unglobalcompact.org/participation/report/cop
- T. ISO 26000—2010 Guidance on Social Responsibility: www.iso.org/iso/home/standards/iso26000.htm
- U. Forest Stewardship Council: www.ic.fsc.org
- V. Sustainable Agriculture Network: www.sanstandards.org
- W. The Rainforest Alliance: www.rainforest-alliance.org/
- X. ASTM Test Method D6866: www.astm.org/Standards/D6866.htm



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

- Y. Chemical Abstracts Service: www.cas.org/
- Z. Health Product Declaration: www.hpd-collaborative.org/
- AA. Cradle-to-Cradle CertifiedCM Product Standard: www.c2ccertified.org/product_certification
- BB. Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH):
www.echa.europa.eu/support/guidance-on-reach-and-clp-implementation
- CC. GreenScreen: www.greenscreenchemicals.org/method/greenscreen-list-translator

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13.04



**SECTION 01 81 13.10
ENVIRONMENTALLY PREFERABLE PURCHASING (EPP) COMPLIANCE**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.10

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for all equipment, material and product purchasing to comply with the requirements of New York City Environmentally Preferable Purchasing (EPP) “Minimum Standards for Construction Products”, as established by the Mayor’s Office of Contract Services (MOCS). Refer to their website for further guidance.
- B. All sections in the Project Specifications with applicable equipment, materials and products will follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications, the more stringent requirements will prevail.
- C. This Section includes:
 - 1. Definitions
 - 2. Administrative Requirements
 - 3. Action Submittals
 - 4. Informational Submittals
 - 5. Products, Materials

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

<u>Term</u>	<u>Definition</u>
Environmentally Preferable Purchasing (EPP) Minimum Standards for Construction Products	The standard that refers to a list of equipment, materials and products that may be specified in construction contracts covered by the EPP laws and provides the applicable minimum standards referenced in the laws. See EPP Minimum Standards for Constructions Products available on MOCS’ website for a comprehensive list of all applicable definitions.



1.5 ADMINISTRATIVE REQUIREMENTS:

- A. At no additional cost to the City of New York, designate an individual who will be responsible for the communication of progress of EPP activities with the Commissioner on a regular basis and for the quality of all EPP-related materials and preparation, coordination and assembly of the supporting documentation.
- B. Scope and Applicability: Action submittals and informational submittals are required for all installed equipment, materials and products that require EPP compliance. Provide all required submittals in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
- C. Distribution and Compilation: The Contractor must coordinate with all affected trades and is responsible for his/her subcontractors complying with the EPP requirements and for providing required EPP documentation as required for the project. The Contractor is responsible for distributing the forms or templates required for the subcontractors to record EPP documentation. The Contractor is also responsible for collecting and compiling information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. The Contractor must respond in a timely manner to questions and requests from the Commissioner, Design Consultant and MOCS regarding EPP requirements that are the responsibility of the Contractor. Document responses as informational submittals.

1.6 ACTION SUBMITTALS:

- A. General Requirements:
 - 1. EPP Documentation Submittals for applicable and compliant product data, as stated in the EPP Minimum Standards for Construction Products, is to be documented in the form of a Vendor Survey and supporting manufacturer's data sheets highlighting EPP compliance-related data. Include in the Vendor Survey the anticipated quantity of product purchased and cost per unit data. See attached sample Vendor Survey form.
 - 2. Compliance with EPP requirements will be used as one criterion to evaluate product selection. Assemble EPP Documentation Submittal information into one package per contract specification section(s) (or per subcontractor). Incomplete or inaccurate EPP Documentation submittals may be used as the basis for the rejection of products or assemblies.
 - 3. Update the quantities and costs in the Vendor Survey once products are approved and purchased and document as information submittal.

1.7 INFORMATIONAL SUBMITTALS

- A. For each registered contract, the Contractor must maintain a Master Vendor Survey, an updated tracking log of all equipment, materials and products purchased on a contract that are required to comply with EPP. Submit the Master Vendor Survey on a monthly basis and update the costs once products are purchased.
 - 1. Upon request by MOCS, submit the Master Vendor Survey and supporting documents.
- B. EPP Progress Reports: Concurrent with each Application for Payment, submit reports of purchasing activities for each of the EPP-applicable equipment, materials and products listed in Sub-section C below.
- C. Project Materials Cost Data: For Vendor Survey and EPP Progress Reports, include breakout of costs for the following categories of items:



1. Appliances.
2. Architectural Coatings.
3. HVAC Equipment.
4. Lighting Products.
5. Miscellaneous Products – Construction.
6. Plumbing Fixtures.

PART II – PRODUCTS

2.1 MATERIALS:

A. Detailed Requirements. This sub-section defines the information and documents to be provided for each EPP-applicable equipment, material and product type, as identified in each specification section:

1. Appliances – Residential:

All energy-using products for which the United States Environmental Protection Agency and the United States Department of Energy have developed energy efficiency standards for compliance with the Energy Star program shall be ENERGY STAR labeled. The following residential appliances shall comply with this requirement:

- a. Clothes Washers
- b. Dehumidifiers
- c. Dishwashers, Standard-Sized
- d. Freezers, Upright, Chest and Compact
- e. Refrigerators and Refrigerator-Freezers, Standard-Sized and Compact

Microwave Ovens shall comply with the following requirements:

- a. Recommended Standby Levels: 2 watts or less
- b. Best Available Standby Level: 2 watts or less

2. Architectural Coatings:

a. For the products listed below, the maximum content of Volatile Organic Compounds (VOCs) shall be determined according to the American Society for Testing and Materials test method D 5116 (Guide for Small-Scale Environmental Chamber Determinations of Organic Emissions from Indoor Materials/Products).

Architectural Coating	Maximum Concentration of VOC in Grams per Liter
Clear Wood Coating – Clear-Brushing lacquers	275
Clear Wood Coating – Sanding Sealers (Other than Lacquers)	275
Clear Wood Coating –Varnishes	275
Floor Coatings	100
Lacquers - Pigmented	275
Primers for Flat Paint	100
Primers for Non-Flat Paint	150
Rust Preventative/Anti-Corrosive Paint	250



b. Any product listed below that is compliant with Part 205 of Title Six of the New York Codes, Rules and Regulations meets the standard required under EPP Minimum Standards for Construction Products. The maximum content of VOCs for these products shall be determined according to the test method required under part 205.6 of such part.

Architectural Coating	Maximum Concentration of VOC in Grams per Liter
Clear Wood Coating – Conversion Varnishes	725
Clear Wood Coating – Lacquers (Including Lacquer Sanding Sealers)	550
Concrete Bond Breakers	350
Concrete Curing Compounds	350
Concrete Surface Retarders	780
Dry Fog Coatings	400
Faux Finishing Coatings	350
Fire-Resistive Coatings	350
Fire-Retardant Coatings	650
Fire-Retardant Coatings - Opaque	350
Flat Paint	100
Form Release Compounds	250
Graphic Arts Coatings (Sign Paints)	500
High Temperature Coatings	420
Industrial Maintenance (IM) Coatings	340
Low Solids Coatings	120
Magnesite Cement Coatings	450
Mastic Texture Coatings	300
Metallic Pigmented Coatings	500
Multi-Color Coatings	500
Nonflat High-Gloss Coatings	250
Nonflat Paint	150
Pre-Treatment Wash Primers	420
Primers, Sealers, and Undercoaters	200
Quick-Dry Enamels	250
Quick-Dry Primers, Sealers, and Undercoaters	200
Recycled Coatings	250
Roof Coatings	250
Roof Coatings (Bituminous)	300
Roof Primers (Bituminous)	350
Shellacs – Clear	730
Shellacs – Opaque	550
Specialty Primers, Sealers and Undercoaters	350
Stains	250
Swimming Pool Coatings and Swimming Pool Repair and Maintenance Coatings	340
Thermoplastic Rubber Coatings and Mastics	550
Waterproofing Concrete / Masonry Sealers	400
Waterproofing Sealers	250
Wood Preservatives	350



c. The products listed below shall be recovered material and comply with the Post-consumer Content and Total Recovered Materials Content requirements.

Architectural Coating	Post-consumer Content (%)	Total Recovered Materials Content (%)
Latex Paint – Consolidated	100	100
Latex Paint – Reprocessed White, Off-White and Pastel Colors	20	20
Latex Paint – Reprocessed Grey, Brown, Earthtones and Other Dark Colors	50-99	50-99

3. HVAC Equipment: Commercial and Residential

a. Commercial

All energy-using products for which the United States Environmental Protection Agency and the United States Department of Energy have developed energy efficiency standards for compliance with the Energy Star program shall be ENERGY STAR labeled. The following Commercial HVAC Equipment shall comply with this requirement:

1. Air Conditioners, Air-Cooled
2. Air Conditioners, Gas/Electric Package Units
3. Heat Pumps, Air Source

Chillers shall comply with the following Part Load Optimized Chillers IPLV and Full Load Optimized Chillers IPLV requirements:

Type	Compressor Type and Capacity	Part Load Optimized Chillers IPLV (kW/ton) Required	Full Load Optimized Chillers IPLV (kW/ton) Required
Air-Cooled	Scroll (30 – 60 tons)	0.86 or less	1.23 or less 1.1
Air-Cooled	Reciprocating (30 – 150 tons)	0.90 or less	1.23 or less 1
Air-Cooled	Screw (70 – 200 tons)	0.98 or less	1.23 or less 0.94
Water-Cooled	Centrifugal (150 – 299 tons)	0.52 or less	0.59 or less
Water-Cooled	Centrifugal (300 – 2,000 tons)	0.45 or less	0.56 or less
Water-Cooled	Rotary Screw (>150 tons)	0.49 or less	0.64 or less

b. Residential

All energy-using products for which the United States Environmental Protection Agency and the United States Department of Energy have developed energy efficiency standards for compliance with the Energy Star program shall be ENERGY STAR labeled. The following Residential HVAC Equipment shall comply with this requirement:

1. Air Conditioners, Central (<65,000 Btu/h)



2. Air Conditioners, Central, Gas/Electric Package Units (<65,000 Btu/h)
3. Air Source Heat Pumps (<65,000 Btu/h)
4. Boilers and Boiler/Hot Water Heaters (<300,000 Btu/h)
5. Ceiling Fans
6. Furnaces and Furnace/Hot Water Heaters (<340,000 Btu/h)
7. Ground Source Heat Pumps (Geothermal)
8. In-Line Ventilating Fan
9. Programmable Thermostats
10. Range Hood and Bathroom /Utility Room Ventilating Fans
11. Room Air Cleaners
12. Room Air Conditioners

4. Lighting Products

a. The following lighting products shall comply with the corresponding BEF requirement:

Product Type	Number of Lamps	Required BEF
Ballast, Fluorescent, Four-Foot, Linear T12, 34-Watts	1	2.64 or higher
Ballast, Fluorescent, Four-Foot, Linear T12, 34-Watts	2	1.41 or higher
Ballast, Fluorescent, Four-Foot, Linear T12, 34-Watts	3	0.93 or higher
Ballast, Fluorescent, Eight-Foot, Linear T12, 60-Watts	2	0.80 or higher
Ballast, Fluorescent, Four-Foot, Linear T8, 32-Watts	1	2.54 or higher
Ballast, Fluorescent, Four-Foot, Linear T8, 32-Watts	2	1.44 or higher
Ballast, Fluorescent, Four-Foot, Linear T8, 32-Watts	3	1.44 or higher
Ballast, Fluorescent, Four-Foot, Linear T8, 32-Watts	4	0.73 or higher
Ballast, Fluorescent, Eight-Foot, Linear T8, 59-Watts	2	0.80 or higher
Ballast, Fluorescent, Four-Foot, U-Bent T12, 34-Watts	1	2.64 or higher
Ballast, Fluorescent, Four-Foot, U-Bent T12, 34-Watts	2	1.41 or higher
Ballast, Fluorescent, Four-Foot, U-Bent T12, 34-Watts	3	0.93 or higher
Ballast, Fluorescent, U-Tube, U-Bent T8, 32-Watts	1	2.54 or higher
Ballast, Fluorescent, U-Tube, U-Bent T8, 32-Watts	2	1.44 or higher
Ballast, Fluorescent, U-Tube, U-Bent T8, 32-Watts	3	0.93 or higher
Ballast, Fluorescent, U-Tube, U-Bent T8, 32-Watts	4	0.73 or higher

b. All energy-using products for which the United States Environmental Protection Agency and the United States Department of Energy have developed energy efficiency standards for compliance with the Energy Star program shall be ENERGY STAR labeled. The following Lighting Products shall comply with this requirement:

1. Exit Signs
2. Luminaires, Residential



c. Luminaires, Downlight, With Compact Fluorescent Lamps (13-32 Lamp Wattage) shall comply with the following LER requirements:

Luminaire Type (NEMA Designation)	Required LER
Open Optics	29 or higher
Baffled Optics	21 or higher
Lensed Optics	24 or higher

d. Luminaires, Downlight, With Metal Halide Lamps (<150 Watts) shall comply with the following LER requirements:

Luminaire Type (NEMA Designation)	Required LER
Open Optics	35 or higher
Lensed Optics	30 or higher

e. Luminaires, Fluorescent shall comply with the following LER requirements:

Luminaire Type (NEMA Designation)	Number of Lamps	Required LER
Lensed (FL)	2	62 or higher
Lensed (FL)	3	61 or higher
Lensed (FL)	4	61 or higher
VDT-Preferred Louvered (FP)	2	50 or higher
VDT-Preferred Louvered (FP)	3	51 or higher
VDT-Preferred Louvered (FP)	4	54 or higher
Four-Foot (FW)	2	63 or higher
Four-Foot (FW)	4	62 or higher
Four-Foot (FS)	1	70 or higher
Four-Foot (FS)	2	70 or higher
Four-Foot (FI)	1	67 or higher
Eight-Foot (FI)	2	68 or higher

f. Luminaires, Industrial HID, With High Pressure Sodium Lamps (<150 Lamp Wattage) shall comply with the following LER requirements:

Upward Efficiency	Lamp Wattage	Closed Fixture (HR) LER Required	Open Fixture (HR) LER Required
0%	150-399	58 or higher	68 or higher
0%	400-999	63 or higher	84 or higher
0%	>1000	N/A	N/A
1%-10%	150-399	64 or higher	63 or higher
1%-10%	400-999	82 or higher	89 or higher
1%-10%	>1000	N/A	109 or higher
11%-20%	150-399	N/A	78 or higher



11%-20%	400-999	N/A	94 or higher
11%-20%	>1000	N/A	N/A
>20%	150-399	75 or higher	77 or higher
>20%	400-999	N/A	N/A
>20%	>1000	N/A	N/A

5. Miscellaneous Products – Construction

- a. For the products listed below, the maximum content of Volatile Organic Compounds (VOCs) shall be determined according to the American Society for Testing and Materials test method D 5116 (Guide for Small-Scale Environmental Chamber Determinations of Organic Emissions from Indoor Materials/Products). The products may not contain any volatile organic compound in any concentration exceeding that specified below. Products that are compliant with the Green Label Plus program of the Carpet and Rug Institute are also compliant with this standard.

Carpet Adhesives		
Volatile Organic Compound	24-Hour Testing Maximum Emission Factor (µg/m²•hr)	14-Day Testing Maximum Emission Factor (µg/m²•hr)
Formaldehyde	50	31
2-ethyl-1-hexanol	300	300
Total Volatile Organic Compounds	800	N/A
Carpet Cushions		
Volatile Organic Compound	24-Hour Testing Maximum Emission Factor (µg/m²•hr)	14-Day Testing Maximum Emission Factor (µg/m²•hr)
Butylated Hydroxytoluene	300	N/A
Formaldehyde	50	N/A
4-Phenylcyclohexene (4PCH)	50	N/A
Total Volatile Organic Compounds	1000	N/A
Carpets		
Volatile Organic Compound	24-Hour Testing Maximum Emission Factor (µg/m²•hr)	14-Day Testing Maximum Emission Factor (µg/m²•hr)
Formaldehyde	50	30
4-Phenylcyclohexene	50	17
Styrene	410	410
Total Volatile Organic Compounds	500	N/A



b. The products listed below shall comply with the Recycled Post-consumer Content and Total Recovered Materials Content requirements.

Carpet Cushion – Bonded Polyurethane		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Old Carpet Cushion	15-50	15-50
Carpet Cushion – Jute		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Burlap	40	40
Carpet Cushion – Rubber		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Tire Rubber	60-90	60-90
Carpet Cushion – Synthetic Fibers		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Carpet Fabrication Scrape	No Range Recommended	100
Cement and Concrete		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Cenospheres	No Range Recommended	Minimum 10% (by volume)
Coal fly Ash	No Range Recommended	No Range Recommended
GGBF Slag	No Range Recommended	No Range Recommended
Silica Fume	No Range Recommended	5-10% of cementitious material (dry weight basis)
Channelizers		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Plastic	25-90	No Range Recommended
Rubber (base only)	100	No Range Recommended
Delineators – Fixed		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Plastic	25-90	No Range Recommended
Rubber (base only)	100	No Range Recommended
Steel (BOF, base only)	16	25-30
Steel (BOF, base only)	67	100
Delineators – Flexible		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Plastic PET	25-85	No Range Recommended
Floor Tiles		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Rubber	90-100	No Range Recommended
Plastic	No Range Recommended	90-100
Insulation - Cellulose		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)



Post-consumer Paper	75	75
Insulation - Foam-In-Place		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Recovered Material	No Range Recommended	5
Insulation - Glass Fiber Reinforced		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Recovered Material	No Range Recommended	6
Insulation - Laminated Paperboard		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Post-consumer Paper	100	100
Insulation - Perlite Composition Board		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Post-consumer Paper	23	23
Insulation - Phenolic Rigid Foam	Insulation - Phenolic Rigid Foam	Insulation - Phenolic Rigid Foam
Material	Material	Material
Recovered Material	Recovered Material	Recovered Material
Insulation - Plastic, Non-woven Batt	Insulation - Plastic, Non-woven Batt	Insulation - Plastic, Non-woven Batt
Material	Material	Material
Recovered and/or Post-consumer Plastic	Recovered and/or Post-consumer Plastic	Recovered and/or Post-consumer Plastic
Insulation - Plastic Rigid Foam, Polyisocyanurate/Polyurethane: Rigid Foam	Insulation - Plastic Rigid Foam, Polyisocyanurate/Polyurethane: Rigid Foam	Insulation - Plastic Rigid Foam, Polyisocyanurate/Polyurethane: Rigid Foam
Material	Material	Material
Recovered Material	Recovered Material	Recovered Material
Insulation - Structural Fiberboard	Insulation - Structural Fiberboard	Insulation - Structural Fiberboard
Material	Material	Material
Recovered Material	Recovered Material	Recovered Material
Modular Threshold Ramps	Modular Threshold Ramps	Modular Threshold Ramps
Material	Material	Material
Steel (BOF)	Steel (BOF)	Steel (BOF)
Steel (EAF)	Steel (EAF)	Steel (EAF)
Aluminum	Aluminum	Aluminum
Rubber	Rubber	Rubber



Nonpressure Pipe		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Steel (BOF)	16	25-30
Steel (EAF)	67	100
Plastic (HDPE)	100	100
Plastic (PVC)	5-15	25-100
Cement	No Range Recommended	No Range Recommended
Playground Equipment		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Plastic	90-100	100
Plastic Composite	50-75	95-100
Steel (BOF)	16	95
Steel (EAF)	50-100	95-100
Restroom Dividers/Partitions, Steel		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Steel (from BOF)	16	25-30
Steel (from EAF)	67	100
Roofing Materials		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Steel (BOF)	16	25-30
Steel (EAF)	67	100
Aluminum	20-95	20-95
Fiber (felt) or Fiber Composite	50-100	50-100
Rubber	12-100	100
Plastic or Plastic/Rubber Composite	100	100
Wood/Plastic Composite	No Range Recommended	100
Cement	No Range Recommended	No Range Recommended
Shower Dividers/Partitions, Steel		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Steel (from BOF)	16	25-30
Steel (from EAF)	67	100
Traffic Barricades		
Material	Recovered Post-consumer Content (%)	Total Recovered Materials Content (%)
Plastic (High Density Polyethylene [HDPE], Low-Density Polyethylene [LDPE], Polyethylene terephthalate [PET])	80-100	100
Steel (BOF)	16	25-30
Steel (EAF)	67	100
Fiberglass	No Range Recommended	No Range Recommended

c. All energy-using products for which the United States Environmental Protection Agency and the United States Department of Energy have developed energy efficiency standards for compliance with the Energy Star program shall be ENERGY STAR labeled. The following Construction Products shall comply with this requirement:

ENVIRONMENTALLY PREFERABLE PURCHASING (EPP) COMPLIANCE



1. Entry or Patio Doors, Residential
 2. Residential Skylights
 3. Residential Windows & Tubular Daylighting Devices
 4. Roof Products
- d. Electric Motors shall comply with the following Nominal Efficiencies requirements:

Nominal Efficiencies for Induction Motors Rated 600 Volts or Less (Random Wound)						
Motor Size (HP)		Open Drip-Proof (ODP)		Totally Enclosed Fan-Cooled (TEFC)		
6-pole (1200 rpm)	4-pole (1200 rpm)	2-pole (1200 rpm)	6-pole (1200 rpm)	4-pole (1200 rpm)	2-pole (1200 rpm)	
1	82.5	85.5	77.0	82.5	85.5	77.0
1.5	86.5	86.5	84.0	87.5	86.5	84.0
2	87.5	86.5	85.5	88.5	86.5	85.5
3	88.5	89.5	85.5	89.5	89.5	86.5
5	89.5	89.5	86.5	89.5	89.5	88.5
7.5	90.2	91.0	88.5	91.0	91.7	89.5
10	91.7	91.7	89.5	91.0	91.7	90.2
15	91.7	93.0	90.2	91.7	92.4	91.0
20	92.4	93.0	91.0	91.7	93.0	91.0
25	93.0	93.6	91.7	93.0	93.6	91.7
30	93.6	94.1	91.7	93.0	93.6	91.7
40	94.1	94.1	92.4	94.1	94.1	92.4
50	94.1	94.5	93.0	94.1	94.5	93.0
60	94.5	95.0	93.6	94.5	95.0	93.6
75	94.5	95.0	93.6	94.5	95.4	93.6
100	95.0	95.4	93.6	95.0	95.4	94.1
125	95.0	95.4	94.1	95.0	95.4	95.0
150	95.4	95.8	94.1	95.8	95.8	95.0
200	95.4	95.8	95.0	95.8	96.2	95.4
250	95.4	95.8	95.0	95.8	96.2	95.8
300	95.4	95.8	95.4	95.8	96.2	95.8
350	95.4	95.8	95.4	95.8	96.2	95.8
400	95.8	95.8	95.8	95.8	96.2	95.8
450	96.2	96.2	95.8	95.8	96.2	95.8
500	96.2	96.2	95.8	95.8	96.2	95.8



Nominal Efficiencies for Induction Motors Rated Medium Voltage or Less (Form Wound)					
Motor Size (HP)		Open Drip-Proof (ODP)		Totally Enclosed Fan-Cooled (TEFC)	
6-pole (1200 rpm)	4-pole (1200 rpm)	2-pole (1200 rpm)	6-pole (1200 rpm)	4-pole (1200 rpm)	2-pole (1200 rpm)
250-500	95.0	95.0	94.5	95.0	95.0

6. Plumbing Fixtures.

The plumbing fixtures shall comply with the following Water Efficiency requirements:

Plumbing Fixture	Water Efficiency Requirement
Lavatory Faucets	< 2.0 gallons per minute
Showerheads, Residential and Commercial	< 2.2 gallons per minute
Toilets, Residential and Commercial	< 1.6 gallons per flush
Urinals, Residential and Commercial	< 1.0 gallons per flush

PART III – EXECUTION (Not Used)

END OF SECTION 018113.10



EPP VENDOR SURVEY FORM

Instructions: In the space provided, indicate the following: (1.) Choose Construction for the EPP Book Used (2.) Choose the product type from the drop-down menu; (3.) Choose the product detail from the drop-down menu; (4.) Identify the specific item under Product Description; (5.) Enter the number of products per unit; (6.) Enter the cost per unit; (7.) Enter the units purchased; (8.) Enter the total cost.

Return completed spreadsheet to the contracting agency in the accompanying letter. Thank you.

Agency Acronym	Environmental Preferable Purchasing Information				Quantity and Cost Information				Comments
	EPP Book Used	Product Type	Product Details	Product Description	Products Per Unit	Cost Per Unit	Units Purchased	Total Cost	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
DDC								\$0.00	
TOTAL					0.00	\$0.00	0.00	\$0.00	



SECTION 01 81 13.13

VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes requirements for volatile organic compound (VOC) content in adhesives, sealants, paints and coatings used for the project.
- B. All sections in the Project Specifications with adhesives, sealant or sealant primer applications, paints and coatings will follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications regarding adhesives, sealant or sealant applications, paints and coatings, the requirements set forth in this Section will prevail.
- C. This Section includes:
 - 1. General Requirements
 - 2. References
 - 3. VOC Requirements for Interior Adhesives
 - 4. VOC Requirements for Interior Sealants
 - 5. VOC requirements for Interior Paints
 - 6. VOC requirements for Interior Coatings
 - 7. Submittals

1.3 RELATED SECTIONS: include without limitation the following:

- | | | |
|----|---------------------|---|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| D. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| E. | Section 01 73 00 | EXECUTION |
| F. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| G. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |
| H. | Section 01 81 13.03 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS |
| I. | Section 01 81 13.04 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS |
| J. | Section 01 81 19 | INDOOR AIR QUALITY FOR LEED BUILDINGS |



1.4 DEFINITIONS:

A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

ADHESIVE	Any substance used to bond one surface to another by attachment. Includes adhesive primers and adhesive bonding primers. A. Aerosol Adhesive: Any adhesive packaged as an aerosol with a spray mechanism permanently housed in a non-refillable can designed for hand-held application without the need for ancillary equipment.
CARCINOGEN	A chemical listed as a known, probable, reasonably anticipated, or possible human carcinogen by the International Agency for Research on Cancer (IARC) (Groups 1, 2A, and 2B), the National Toxicology Program (NTP) (Groups 1 and 2), the U.S. Environmental Protection Agency (EPA) Integrated Risk Information System (IRIS) (weight-of-evidence classifications A, B1, B2, and C, carcinogenic, likely to be carcinogenic, and suggestive evidence of carcinogenicity or carcinogen potential), or the Occupational Safety and Health Administration (OSHA).
CLEAR WOOD FINISH	Clear/semi-transparent coating applied to wood substrates to provide a transparent or translucent solid film. 1. Lacquer: Clear/semi-transparent coating formulated with cellulosic or synthetic resins to dry by evaporation without chemical reaction and provide a solid, protective film. 2. Sanding Sealer: A sanding sealer that also meets the definition of a lacquer. 3. Varnish: Clear/semi-transparent coating, excluding lacquers and shellacs, formulated to dry by chemical reaction on exposure to air. May contain small amounts of pigment.
COATING	Liquid, liquefiable, or mastic composition that is converted to a solid adherent film after application to a substrate as a thin layer; and is used for decorating, protecting, identifying or to serve some functional purpose such as the filling or concealing of surface irregularities or the modification of light and heat radiation characteristics; and is intended for on-site application to interior or exterior surfaces of buildings. Does not include stains, clear finishes, recycled latex paint, specialty (industrial, marine or automotive) coatings or paint sold in aerosol cans.
FLOOR COATING	Opaque coating applied to flooring. Excludes industrial maintenance coatings.
HAZARDOUS AIR POLLUTANT	Any compound listed by the U.S. EPA in the Clean Air Act, Section 112(b)(1) as a hazardous air pollutant.



MUTAGEN	A chemical that meets the criteria for category 1, chemicals known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans, under the Harmonized System for the Classification of Chemicals Which Cause Mutations in Germ Cells (United Nations Economic Commission for Europe, Globally Harmonized System of Classification and Labeling of Chemicals).
OZONE-DEPLETING COMPOUNDS	A compound with an ozone-depletion potential greater than 0.1 (CFC 11=1) according to the U.S. EPA list of Class I and Class II Ozone-Depleting Substances.
PAINT	A pigmented coating. For the purposes of this specification, paint primers are considered to be paints. <ol style="list-style-type: none"> 1. Flat Coating or Paint: Has a gloss of less than 15 (using an 85-degree meter) or less than 5 (using a 60-degree meter). 2. Non-Flat Coating or Paint: Has a gloss of greater than or equal to 15 (using an 85-degree meter) or greater than or equal to 5 (using a 60-degree meter). 3. Non-Flat High-Gloss Coating or Paint: Has a gloss of greater than or equal to 70 (using a 60-degree meter). 4. Anti-Corrosive / Rust Preventative Paint: Coating formulated and recommended for use in preventing the corrosion of ferrous metal substrates.
PRIMER	Coating that is formulated and recommended for one or more of the following purposes: to provide a firm bond between the substrate and a subsequent coating; to prevent a subsequent coating from being absorbed into the substrate; to prevent harm to a subsequent coating from materials in the substrate; or to provide a smooth surface for application of a subsequent coating.
REPRODUCTIVE TOXIN	A chemical listed as a reproductive toxin (including developmental, female, and male toxins) by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (California Code of Regulations, Title 22, Division 2, Subdivision 1, Chapter 3, Sections 1200, et. Seq.).
SANDING SEALER	Clear/semi-transparent coating formulated to seal bare wood. Can be abraded to create a smooth surface for subsequent coatings. Does not include sanding sealers that are lacquers (see Clear Wood Finish above).
SEALANT	Any material with adhesive properties, formulated primarily to fill, seal, or waterproof gaps or joints between surfaces. Includes sealant primers and caulks.



SHELLAC	Clear or pigmented coating formulated solely with the resinous secretions of the lac beetle, thinned with alcohol and formulated to dry by evaporation without chemical reaction. Excludes floor applications.
STAIN	Clear semi-transparent/opaque coating formulated to change the color but not conceal the grain pattern or texture of the substrate.
VOLATILE AROMATIC COMPOUND	Any hydrocarbon compound containing one or more 6-carbone benzene rings, and having an initial boiling point less than or equal to 280 degrees Celsius measured at standard conditions of temperature and pressure.
VOLATILE ORGANIC COMPOUND	Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.
WATERPROOFING SEALER	A coating that prevents the penetration of water into porous substrates.

1.5 GENERAL REQUIREMENTS:

- A. The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED Green building rating. Specific project requirements related to this goal which may impact this area of work are listed in the applicable paragraphs of this specification section. The Contractor must ensure that the requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, must not be allowed if such changes compromise the stated environmental goals.

1.6 REFERENCES:

- A. Rule 1168 – “Adhesive and Sealant Applications”, amended 7 January 2005): South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- B. Rule 1113 - “Architectural Coatings”, amended 9 July 2004: South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- C. Green Seal Standard GS-11- “Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org
- D. Green Seal Standard GC-03- “Anti-Corrosive Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org

1.7 VOC REQUIREMENTS FOR INTERIOR ADHESIVES, SEALANTS, PAINTS AND COATINGS:

- A. GENERAL: Unless otherwise specified herein, the VOC content of all interior adhesives, sealants, paints and coatings (herein referred to as “products”) must not be in excess of **250 grams per liter**.
- B. No product may contain any ingredients that are carcinogens, mutagens, reproductive toxins, persistent bioaccumulative compounds, hazardous air pollutants, or ozone-depleting compounds. An exception must be made for titanium dioxide and, for products that are pre-tinted by the manufacturer, carbon black, which must be less than or equal to 1% by weight of the product.

VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES,
SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS



- C. No product will contain the following:
 - 1. methylene chloride
 - 2. 1,1,1-trichloroethane
 - 3. benzene
 - 4. toluene
 - 5. ethylbenzene
 - 6. vinyl chloride
 - 7. naphthalene
 - 8. 1,2-dichlorobenzene
 - 9. di (2-ethylhexyl) phthalate
 - 10. butyl benzyl phthalate
 - 11. di-n-butyl phthalate
 - 12. di-n-octyl phthalate
 - 13. diethyl phthalate
 - 14. dimethyl phthalate
 - 15. isophorone
 - 16. antimony
 - 17. cadmium
 - 18. hexavalent chromium
 - 19. lead
 - 20. mercury
 - 21. formaldehyde
 - 22. methyl ethyl ketone
 - 23. methyl isobutyl ketone
 - 24. acrolein
 - 25. acrylonitrile

- D. No product will contain more than 1.0% by weight of sum total of volatile aromatic compounds.

1.8 VOC REQUIREMENTS FOR INTERIOR ADHESIVES:

- A. The volatile organic compound (VOC) content of adhesives, adhesive bonding primers, or adhesive primers used in this project must not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
- C. For specified building construction related applications, the allowable VOC content is as follows:
 - 1. Architectural Applications:

a. Indoor carpet adhesive	50
b. Carpet pad adhesive	50
c. Wood flooring adhesive	100
d. Rubber floor adhesive	60
e. Subfloor adhesive	50
f. Ceramic tile adhesive	65
g. VCT and asphalt tile adhesive	50
h. Drywall and panel adhesive	50
i. Cove base adhesive	50
j. Multipurpose construction adhesive	70
k. Structural glazing adhesive	100
 - 2. Specialty Applications:

a. PVC welding	510
----------------	-----



- | | | |
|----|--|-----|
| b. | CPVC welding | 490 |
| c. | ABS welding | 325 |
| d. | Plastic cement welding | 250 |
| e. | Adhesive primer for plastic | 550 |
| f. | Contact Adhesive | 80 |
| g. | Special Purpose Contact Adhesive | 250 |
| h. | Structural Wood Member Adhesive | 140 |
| i. | Sheet Applied Rubber Lining Operations | 850 |
| j. | Top and Trim Adhesive | 250 |
3. Substrate Specific Applications:
- | | | |
|----|-------------------------------|----|
| a. | Metal to metal | 30 |
| b. | Plastic foams | 50 |
| c. | Porous material (except wood) | 50 |
| d. | Wood | 30 |
| e. | Fiberglass | 80 |
4. Aerosol Adhesives:
- | | | |
|----|---|---------------------|
| a. | General purpose mist spray | 65% VOC's by weight |
| b. | General purpose web spray | 55% VOC's by weight |
| c. | Special purpose aerosol adhesives (all types) | 70% VOC's by weight |

1.9 VOC REQUIREMENTS FOR INTERIOR SEALANTS:

- A. The volatile organic compound (VOC) content of sealants, or sealant primers used in this project must not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
1. Sealants:
- | | | |
|----|--------------------------|-----|
| a. | Architectural | 250 |
| b. | Non-membrane roof | 300 |
| c. | Roadway | 250 |
| d. | Single-ply roof membrane | 450 |
| e. | Other | 420 |
2. Sealant Primer:
- | | | |
|----|---------------------------|-----|
| a. | Architectural – Nonporous | 250 |
| b. | Architectural – Porous | 775 |
| c. | Other | 750 |

1.10 VOC REQUIREMENTS FOR INTERIOR PAINTS:

- A. Paints and Primers: Paints and primers used in non-specialized interior applications (i.e., for wallboard, plaster, wood, metal doors and frames, etc.) must meet the VOC limitations of the Green Seal Paint Standard GS-11, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:

1. Volatile Organic Compounds:
- a. The VOC concentrations (in grams per liter) of the product must not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Interior Paints and Primers:

Non-flat: 150 g/l



Flat: 50 g/l

The calculation of VOC must exclude water and tinting color added at the point of sale.

- B. Anti-Corrosive and Anti-Rust Paints: Anti-corrosive and anti-rust paints applied to interior ferrous metal substrates must meet the VOC limitations of the Green Seal Paint Standard GC-03, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:

1. Volatile Organic Compounds:

- a. The VOC concentrations (in grams per liter) of the product must not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Anti-Corrosive and Anti-Rust Paints: 250 g/l

The calculation of VOC must exclude water and tinting color added at the point of sale.

1.11 VOC REQUIREMENTS FOR INTERIOR COATINGS:

- A. Clear wood finishes, floor coatings, stains, sealers, and shellacs applied to the interior must meet the VOC limitations defined in Rule 1113, "Architectural Coatings" of SCAQMD, of the State of California. The VOC limits defined by SCAQMD, based on 7/9/04 amendments, are as follows. VOC limits are defined in grams per liter, less water and less exempt compounds.

- | | |
|--------------------------|-----|
| 1. Clear Wood Finishes: | |
| a. Varnish | 350 |
| b. Sanding Sealers | 350 |
| c. Lacquer | 550 |
| 2. Shellac: | |
| a. Clear | 730 |
| b. Pigmented | 550 |
| 3. Stains | 250 |
| 4. Floor Coatings | 100 |
| 5. Waterproofing Sealers | 250 |
| 6. Sanding Sealers | 275 |
| 7. Other Sealers | 200 |

The calculation of VOC must exclude water and tinting color added at the point of sale.

1.12 SUBMITTALS:

- A. Submit Material Safety Data Sheets, for all applicable products in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. Applicable products include, but are not limited to adhesives, sealants, carpets, paints and coatings. Material Safety Data Sheets must indicate the Volatile Organic Compound (VOC) limits of products submitted. (If an MSDS does not include a product's VOC limits, then product data sheets, manufacturer literature, or a letter of certification from the manufacturer can be submitted in addition to the MSDS to indicate the VOC limits).
- B. Submit Environmental Building Materials Certification Form (EBMCF) as referenced in Section 01 81 13.03 SUSTAINABLE REQUIREMENTS FOR LEED v3 BUILDINGS: For each field-applied adhesive, sealant, paint, and coating product, provide the VOC requirement, as provided in this Specification, for the relevant material category indicated on the documentation noted above.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13.13



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)

VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES,
SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS

01 81 13.13 - 8



**SECTION 01 81 19
INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 19

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 CONSTRUCTION IAQ MANAGEMENT GOALS FOR THE PROJECT:

- A. The City of New York has determined that this Project must minimize the detrimental impacts on Indoor Air Quality (IAQ) resulting from construction activities. Factors that contaminate indoor air, such as dust entering HVAC systems and ductwork, improper storage of materials on-site, and poor housekeeping, must be minimized.

1.3 RELATED SECTIONS:

- A. All sections of the Specifications related to interior construction, MEP systems and items affecting indoor air quality.
- B. Division 9 (of the Specifications): Finishes.
- C. Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council’s LEED Rating System, as specified in Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
- D. Refer to the Addendum to identify whether this project is designed to comply with Section 01 81 13.13 VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED v3 BUILDINGS.
- E. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS.

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
-------------------	---



Volatile Organic Compounds (VOCs)	Chemical compounds common in and emitted by many building products, including solvents in paints, coatings, adhesives and sealants, wood preservatives, composite wood binder, and foam insulations. Not all VOCs are harmful, but many of those contained within building products contribute to the formation of smog and may irritate building occupants by their smell or health impact.
Materials that act as “sinks” for VOC contamination	Absorptive materials, typically dry and soft materials (such as textiles, carpeting, acoustical ceiling tiles and gypsum board) that readily absorb VOCs emitted by “source” materials and release them over a prolonged period of time.
Materials that act as “sources” for VOC contamination	Products with high VOC contents that emit VOCs either rapidly during application and curing (typically “wet” products, such as paints, sealants, adhesives, caulks and sealers) or over a prolonged period (typically “dry” products such as flooring coverings with plasticizers and engineered wood with formaldehyde).

1.5 REFERENCES, RESOURCES:

- A. “IAQ Guidelines for Occupied Buildings Under Construction”, Second Edition, 2007, The Sheet Metal and Air Conditioner Contractors National Association (SMACNA). (703) 803-2980, www.smacna.org.
- B. ANSI/ASHRAE 52.2-2007, “Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size”, www.ashrae.org.

1.6 LEED BUILDING GENERAL REQUIREMENTS:

- A. Implement practices and procedures as necessary to meet the Project’s environmental performance goals as set forth in the specific requirements of this section. Specific Project goals that may impact this area of work include: use of recycled-content materials; use of low-emitting materials; construction waste recycling; and the implementation of a construction indoor air quality management plan. Ensure that the requirements related to these goals, as defined in this section, are implemented to the fullest extent. Substitutions or other changes to the work will not be allowed if such changes compromise the stated LEED building performance criteria.

1.7 CONSTRUCTION IAQ MANAGEMENT PLAN:

- A. The Contractor must prepare a Construction IAQ Management Plan in coordination with each Subcontractor and submit the Construction IAQ Management Plan to the Commissioner for approval in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. The Construction IAQ Management Plan must meet the following criteria:
 1. Construction activities must be planned to meet or exceed the minimum requirements of SMACNA’s “IAQ Guidelines for Occupied Buildings under Construction”, Second Edition, 2007.
 2. Absorptive materials must be protected from moisture damage when stored on-site and after installation.
 3. The planned operation of air handlers during construction must be described. If air handlers are to be used during construction, filtration media with a Minimum Efficiency Reporting Value (MERV) of 8 must be used at each return air grille and return or transfer duct inlet opening, such that there is no bypass around the filtration media, as determined by ASHRAE 52.2-2007.
 4. Filtration media must be replaced immediately prior to occupancy. Filtration media must have a MERV of 13 as determined by ASHRAE 52.2-2007.
 5. A sequence of finish installation plan “Plan” must be developed, highlighting measures to reduce the absorption of VOCs by materials that act as “sinks”.



6. The use of tobacco products is prohibited inside the building and within 25 feet of the building entrance during construction.
 7. A flush-out or air testing must be performed.
 8. Upon approval of the finish installation plan by the Commissioner, it must be implemented by the Contractor through the duration of the construction process, and documented in accordance with the Submittal Requirements of Sub-Section 1.8 herein.
- B. Detailed requirements of the Construction IAQ Management Plan are as follows:
1. SMACNA Guidelines: Chapter 3 of the referenced “IAQ Guidelines for Occupied Buildings Under Construction”, outline IAQ measures in five categories as listed below. The Construction IAQ Management Plan must be organized in accordance with the SMACNA format, and must address measures to be implemented in each of the five categories (including subsections). All subsections must be listed in the Plan; items that are not applicable for this Project should be listed as such.
 - a. HVAC Protection
 - 1) Protect air handling, distribution equipment and air supply, and return ducting during construction.
 - 2) All ductwork arriving on site will be sealed with plastic sheeting and stored on pallets or dunnage until installed.
 - 3) Cover and protect all exposed air inlets and outlets, openings, grilles, ducts, plenums, etc. to prevent water, moisture, dust and other contaminant intrusion.
 - 4) Apply protection immediately after ducting.
 - 5) Protect ducting runs at the end of day’s work.
 - 6) Inspect temporary filtration weekly and replace as required to maintain the proper ventilation rates in the building.
 - 7) To reduce debris and contamination to mechanical systems, do not store materials in mechanical rooms.
 - b. Source Control
 - 1) Protect stored on-site or installed absorptive or porous materials. Store materials in dry conditions indoors, under cover, and off the ground or floor.
 - 2) Do not use wet or damaged porous materials in the building. Materials which become contaminated through direct exposure to moisture from precipitation, plumbing leaks, or condensation must be replaced by the Contractor, at no additional cost to the City of New York.
 - 3) Use low-toxicity and low-VOC materials to the greatest extent possible.
 - 4) Recover, isolate, and ventilate containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications.
 - 5) Prevent exhaust fumes from idling vehicles, equipment and fossil-fueled tools from entering the building.
 - 6) Containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, must be closed when not in use.
 - 7) Enforce the no-smoking job site policy.



- c. Pathway Interruption
 - 1) Depressurize work areas which contain dust and odors.
 - 2) Pressurize occupied spaces to prevent intrusion of dust and odors.
 - 3) Erect barriers to contain construction areas.
 - 4) Relocate pollutant sources.
 - 5) Temporarily seal the building and provide 100% outside air for ventilation.
 - 6) Provide walk-off mats at entryways to reduce introduced dirt and pollutants.
 - 7) Use dust guards and collectors on saws and other tools.
 - d. Housekeeping
 - 1) Store materials on elevated platforms under cover, in a designated dry, clean location, prior to unpacking for installation.
 - 2) If materials are not stored in an enclosed location, cover tops and sides of material with waterproof sheeting, securely tied.
 - 3) Institute cleaning activities to remove contaminants from the building prior to occupancy. Clean all coils, air filters and ductwork prior to performing testing, adjusting and balancing of HVAC systems.
 - 4) Sweep the work area on a daily basis. Use an efficient and effective dust collecting method such as damp cloth, wet mop, or vacuum with high-efficiency particulate filters. Activities which produce high levels of dust must be cleaned up immediately upon completion.
 - 5) Spills or excess applications of products containing solvents, or with VOC levels above the limits for interior adhesives, sealants, paints and coatings described in these Specifications, must be removed immediately.
 - 6) Dust all walls prior to application of finishes.
 - 7) Vacuum all stud tracks prior to application of insulation.
 - 8) Keep materials organized to improve job safety as well as indoor air quality.
 - e. Scheduling
 - 1) Phase construction such that absorptive materials are installed only in areas that are weathertight.
 - 2) Schedule activities that utilize “sources” of VOC contamination to take place prior to installing high absorbent materials that will act as “sinks” for contaminants.
 - 3) Review of the appropriate components of the Construction IAQ Management Plan must be a regular action topic at weekly site coordination meetings. Implementation of the Plan must be documented in the meeting minutes.
- 2. Protection of Materials from Moisture Damage: As part of the “Source Control” section of the Construction IAQ Management Plan, measures to prevent installed materials or material stored on-site from moisture damage must be described. This section must also describe corrective measures to be taken if moisture damage does occur to absorptive materials during the course of construction (see Section 1.7 B.1.b).
 - 3. Replacement of Filtration Media: Under the “HVAC Protection” section of the Construction IAQ Management Plan, a description of the filtration media in all ventilation equipment must be provided.



The description must include replacement criteria for filtration media during construction, and confirmation of filtration media replacement for all equipment immediately prior to occupancy.

4. Sequence of Finish Installation for Materials: Where feasible, absorptive materials must be installed after the installation of materials or finishes which have high short-term emissions of VOCs, formaldehyde, particulates, or other air-borne compounds. Absorptive materials include, but are not limited to: carpets; acoustical ceiling panels; fabric wall coverings; insulations (exposed to the airstream); upholstered furnishings; and other woven, fibrous or porous materials. Materials with high short-term emissions include, but are not limited to: adhesives, sealants and glazing compounds (specifically those with petrochemical vehicles or carriers); paints, wood preservatives and finishes; control and/or expansion joint fillers; hard finishes requiring adhesive installation; gypsum board (with associated finish processes and products); and composite or engineered wood products with formaldehyde binders.
5. Pre-Occupancy Phase: Perform either a flush-out or air sample testing (Options 1 or 2, respectively), as follows:

a. OPTION 1 — Flush-Out

- 1) Perform flush-out using either Path 1 or Path 2.
 - i. Path 1: After construction ends, prior to occupancy and with all interior finishes installed, install new filtration media and perform a building flush-out by supplying a total air volume of 14,000 cu.ft. of outdoor air per sq.ft. of floor area while maintaining an internal temperature of at least 60 degrees F and no higher than 80 degrees F and relative humidity no higher than 60%.
 - ii. Path 2: If occupancy is desired prior to completion of the flush-out, the space may be occupied following delivery of a minimum of 3,500 cu.ft. of outdoor air per sq.ft. of floor area to the space. Once a space is occupied, it must be ventilated at a minimum rate of 0.30 cfm/sq.ft. of outside air or the design minimum outside air rate determined in IEQ Prerequisite: Minimum Indoor Air Quality Performance, whichever is greater. During each day of the flush-out period, ventilation must begin a minimum of three hours prior to occupancy and continue during occupancy. These conditions must be maintained until a total of 14,000 cu.ft./sq.ft. of outside air has been delivered to the space.
- 2) Commissioning can occur during flush-out, at the discretion of the Commissioner, provided none of the commissioning procedures introduce contaminants into the space and none of the flush-out procedures circumvent the commissioning process. Complete testing and balancing of the HVAC system after the flush-out is complete. Refer to Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS.
- 3) If even partial construction work occurs during the flush-out, the flush-out must be started again from the beginning for that space. If multiple, discrete HVAC systems operate independently, flush-out may be completed in portions of the building as work is completed in each area served by a given system.

OR

b. OPTION 2 — Air Testing

- 1) Conduct baseline IAQ testing, after construction ends and prior to occupancy, using testing protocols consistent with current versions of the United States Environmental Protection Agency “Compendium of Methods for the Determination of Air Pollutants in Indoor Air” or ISO methods, as additionally detailed in the USGBC “LEED BD+C Reference Guide.”



- 2) Demonstrate that the contaminant maximum concentrations listed below are not exceeded.

CONTAMINANT	MAXIMUM CONCENTRATION
Formaldehyde	27 parts per billion
Particulates (PM10 for all buildings; PM25 for buildings in EPA nonattainment areas, or local equivalent)	PM10: 50 micrograms per cubic meter PM25: 15 micrograms per cubic meter
Ozone (for buildings in EPA nonattainment areas)	0.075 parts per million
Total Volatile Organic Compounds (TVOC)	500 micrograms per cubic meter
Target chemicals listed in the California Department of Public Health (CDPH) Standard Method c1.1, Table 4-1, except formaldehyde	CDPH Standard Method v1.1-2010, Allowable Concentrations, Table 4-1
Carbon Monoxide (CO)	9 part per million and no greater than 2 parts per million above outdoor levels

- 3) The air sample testing must be conducted as follows:
- i. All measurements must be conducted prior to occupancy, but during normal occupied hours and with the building ventilation system starting at the normal daily start time and operated at the minimum outside air flow rate for the occupied mode throughout the duration of the air testing.
 - ii. The building must have all interior finishes installed, including but not limited to millwork, doors, paint, carpet and acoustic tiles. Non-fixed furnishings such as workstations and partitions are required to be in place for the testing.
 - iii. Prior to air sample testing, all punch-list items that would generate VOCs or other contaminants, the testing and balancing of the HVAC system and finalization of all cleaning must be completed. Use low-emitting cleaning products and vacuum cleaners with HEPA filtration.
 - iv. The number of sampling locations will vary depending upon the size of the building and number of ventilation systems. For each portion of the building served by a separate ventilation system, the number of sampling points must not be less than one per 25,000 sq.ft., or for each contiguous floor area, whichever is larger, and include areas with the least ventilation and greatest presumed source strength.
 - v. Air samples must be collected between 3 feet and 6 feet from the floor to represent the breathing zone of occupants, and over a minimum 4-hour period.
 - vi. For each sampling point where the maximum concentration limits are exceeded, conduct additional flush-out with outside air and retest the specific parameter(s) exceeded to indicate the requirements are achieved. Repeat procedure until all requirements have been met. When retesting non-complying building areas, take samples from the same locations as in the first test.
6. Implementation and Coordination: Before Demolition and/or Construction begins, the Contractor must implement the Construction IAQ Management Plan, coordinate the Construction IAQ Management Plan with all affected trades, and designate one individual as the Construction IAQ Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of the Construction IAQ Management Plan with the Commissioner monthly and for assembling the required LEED documentation. Include provisions in the Construction



IAQ Management Plan for addressing conditions in the field that do not adhere to the Plan, including provisions to implement a stop work order or to rectify non-compliant conditions.

- a. Distribution: The Contractor must distribute copies of the Construction IAQ Management Plan in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
- b. Instruction: The Contractor must provide on-site instruction of appropriate site management to all Contractor's Subcontractors.
- c. Monitoring: The Construction IAQ Representative must monitor the implementation of the Construction IAQ Management Plan.

1.8 SUBMITTALS:

- A. Submit the following LEED-required records and documents in accordance with Section 01 33 00 SUBMITTAL PROCEDURES and, as applicable, Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS or Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS.
- B. A copy of the Construction IAQ Management Plan as defined in Sub-Section 1.7 herein.
- C. IAQ Tracking Log
 1. Note date of observed major Construction IAQ issues, describe any damage, describe any repairs or maintenance of specific control measures performed and note responsible party.
 2. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party. Provide date-stamped photographs, inspection reports or other recording processes.
 3. Submit log monthly.
- D. Product cut-sheets for all filtration media used during construction and installed immediately prior to occupancy, with MERV values highlighted. Cut sheets must be submitted with the Contractor's or Subcontractor's "approved" stamp as confirmation that the products are the products installed on the Project.
- E. PHOTOGRAPHS: Submit to the Commissioner a minimum of 18 photographs as required under the provision for special photographs, in accordance with Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION, comprised of at least six photographs taken on three different occasions during construction of each IAQ measure. The photographs must document the implementation of the Construction IAQ Management Plan throughout the course of the Project construction. Examples include photographs of ductwork sealing and protection, temporary ventilation measures, and conditions of on-site materials storage (to prevent moisture damage). Photographs must include integral date stamping, and must be submitted with brief descriptions of the Construction IAQ Management Plan measure documented, or be referenced to Project meeting minutes or similar Project documents which reference to the Construction IAQ Management Plan measure documented.
- F. A copy of the Project's "Testing, Adjusting and Balancing" (TAB) report, if applicable.

1.9 QUALITY ASSURANCE:

- A. The Contractor will be responsible for preparing and implementing the Construction IAQ Management Plan and must coordinate and incorporate the work of its Subcontractors in the IAQ Management Plan. Include the Construction IAQ Management Plan requirements in contract agreements with Subcontractors. Familiarize Subcontractors with the Construction IAQ Management Plan and how the Construction IAQ Management Plan will affect their daily activities. Hold a Subcontractors' orientation meeting to review the Construction IAQ Management Plan requirements.
- B. Responsibility of Subcontractors: Subcontractors for this Project will be responsible for cooperating with the Contractor in the preparation and implementation of the Construction IAQ Management Plan.



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

- C. Include construction IAQ progress check-ins as a regular item in weekly Subcontractor meetings and safety meetings. Provide a copy of the plan on site, posted in an easily accessible area.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 19



**SECTION 01 91 13
GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 91 13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The OPR and BOD documents are included by reference for information only.
- C. The Commissioning Plan, prepared by the Commissioning Agent (CxA) under separate contract with the City of New York, contains requirements that apply to this section.

1.2 SUMMARY:

- A. This section includes general requirements that apply to implementation of Commissioning without regard to systems, subsystems and equipment being commissioned. General Requirements for building enclosure commissioning are addressed in a separate specification.
- B. This Section includes:
 - 1. Definitions
 - 2. Commissioning Team
 - 3. City’s Responsibilities
 - 4. Contractor’s Responsibilities
 - 5. CxA Responsibilities
 - 6. Commissioning Documentation
 - 7. Submittals
 - 8. Coordination
 - 9. Execution

1.3 RELATED SECTIONS:

- A. System-Specific Commissioning requirements indicated in other sections of the Project Specifications for specific requirements for commissioning systems.
- B. This Project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning must be in accordance with ASHRAE and USGBC LEED procedures, and specific commissioning requirements of the Project Specifications, whichever is more stringent. The Contractor must cooperate with the CxA and provide whatever assistance is required.
- C. Related sections include, without limitation, the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
 - 3. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 - 5. Section 01 79 00 DEMONSTRATION AND OWNER’S PRE-ACCEPTANCE ORIENTATION
 - 6. Section 01 81 13.03 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v3 BUILDINGS
 - 7. Section 01 81 13.04 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED v4 BUILDINGS
 - 8. Section 01 91 15 GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE



1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.

Basis of Design (BOD)	A document, prepared by the Design Consultant, that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that support the design process.
Checklists	Forms that outline the step-by-step process that must be executed to fulfill the test requirements and to verify that materials, equipment, assemblies and systems are installed in accordance with the Contract Documents. The CxA must develop the checklists; the Contractor must complete them.
Commissioning	Commissioning is a systematic process of ensuring and documenting that the building systems have been installed in the prescribed manner, are functionally checked and capable of being operated and maintained to perform with the design intent and have documentation to support proper installation and operation. The process does not eliminate or reduce the responsibility of the installing subcontractors to provide a finished product.
Commissioning Agent (Aka Commissioning Authority) (CxA)	Consultant under separate contract with the City of New York to provide Commissioning services for this Project. The CxA must not be an employee of the Contractor, nor will the CxA have any interest in the Contract.
Commissioning Plan	A document developed by the CxA that outlines the organization, schedule, roles and responsibilities, allocation of resources, and documentation requirements of the commissioning process.
Deferred Performance Tests	Performance tests that are performed, at the discretion of the CxA, after substantial completion, due to partial occupancy, equipment, seasonal requirements, design, or other site conditions that disallow the test from being performed.
Design Consultant	The entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and Specifications) and providing services in connection with such documents during construction. The entity serving as the “Design Consultant” may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
Factory Testing	Testing of equipment on-site or at the factory, by factory personnel, with or without the City’s representative.
Functional Performance Test (FPT)	Functional performance testing includes the dynamic functions and operations of equipment and systems using manual or monitoring methods under various levels of operation. Systems are tested under various modes, such as during low cooling loads, high loads, component failures, unoccupied, varying outside air temperatures, fire alarms, power failure, etc. The systems are run through all the control system’s sequences of operation and components are verified to respond as the sequences state. Such tests must be performed as per the protocol written by the CxA which defines the methods, personnel and expectations.
Issue (or Deficiency)	A condition in the installation or function of a component, piece of equipment, or system that is not in compliance with the Contract Documents.



Issues Log	A formal and ongoing record of problems, deficiencies or concerns that have been raised by members of the Commissioning Team during the course of commissioning. The Issues Log is the primary tracking tool to address all Commissioning Issues by concerned parties. All Issues must be addressed and resolved by the concerned parties before the closeout of the Project. This log tracks the resolution performed and date of closure of each Issue.
Master Equipment List (MEL)	A complete listing of all commissioned building equipment, including details such as make, model, location, ID Tag number, etc. that is taken from submittals and is the basis from which checklists will be generated. The MEL is a spreadsheet which is also used as a tracking tool for all milestones of the commissioning process, such as the creation and performance of checklists, startup of equipment, TAB work, etc.
Monitoring	The recording of parameters (flow, current, status, pressure, etc.) of equipment operation using data loggers or the trending capabilities of control systems.
Owner (City of New York) Contracted Tests	Tests paid for by the City of New York outside of the Contractor's Contract and for which the CxA does not provide oversight. These tests will not be repeated during functional testing if properly documented.
Owner's Project Requirements (OPR)	A document, prepared by the Design Consultant that details the functional requirements of a Project and the expectations of how it will be used and operated. These include Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.
Pre-functional (Installation) Checklists	A list of items to inspect and elementary component tests to conduct to verify proper installation of equipment, provided by the CxA to the Contractor. Installation checklists are primarily static inspections and procedures to prepare equipment or systems for initial operation. Pre-functional (Installation) checklists augment, and are combined with, the manufacturer's startup checklist. The Checklists are filled out by the Contractor and reviewed by the CxA.
Sampling	Functional testing for a percentage of the total number of identical or near-identical pieces of equipment.
Seasonal Performance Tests	Functional tests that are deferred until, or performed again when, the system(s) will experience climate conditions close to their design conditions.
Startup	The initial starting or activating of equipment, including executing construction checklists.
Systems, Subsystems, Equipment, and Components	Where these terms are used together or separately, they mean "as-built" systems, subsystems, equipment, and components.
Systems Manual	A system-focused composite document that includes the Operation and Maintenance Manual, and additional information of use to the owner during the occupancy and operations phase.
Testing, Adjusting and Balancing (TAB)	Testing, adjusting, and balancing of the Heating Hot Water (HHW), Chilled Water (CHW) and Heating, Cooling, and Ventilation Airflow distribution system flows and pressures as specified in Contract Documents by a subcontractor certified to perform such work.
Test Requirements	Requirements specifying what modes and functions, etc. must be tested on any given piece of equipment or any given system (integrated or standalone). The test requirements are not the detailed test procedures. The test requirements for each system are specified in the respective Contract Documents.



Trending	Monitoring using the building controls system, and analysis of the data gathered over a period of time.
----------	---

1.5 COMMISSIONING TEAM:

- A. Members Appointed by the Contractor and its Subcontractors: Individuals, each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the Commissioning process through coordinated actions. The Commissioning Team will consist of, but not be limited to, representatives of the Contractor, including Project superintendent and Subcontractors, installers, suppliers and specialists deemed appropriate by the CxA.
- B. Members Appointed by the City:
 - 1. Commissioning Authority/Agent (CxA): The designated person, company, or entity under separate Contract with the City that plans, schedules and coordinates the Commissioning Team to implement the commissioning process.
 - 2. Representatives of the facility user and operation and maintenance personnel.
 - 3. Design Consultant and other concerned entities.

1.6 CITY’S RESPONSIBILITIES:

- A. Provide the OPR and BOD documentation to the CxA for use in developing the Commissioning Plan; systems manual; operation and maintenance orientation plan; and testing plans and checklists.
- B. Assign operation and maintenance personnel to participate in Commissioning Team activities.
- C. Provide full details and results of any Owner- contracted tests relevant to the current Project.

1.7 CONTRACTOR’S RESPONSIBILITIES:

- A. The Contractor must provide utility services required for the commissioning process.
- B. As a member of the Commissioning Team, the Contractor and Subcontractors must assign representatives with expertise and authority to act on behalf of the Contractor and its Subcontractor and schedule them to participate in and perform Commissioning Team activities including, but not limited to, the following:
 - 1. Participate in scheduled construction-phase coordination and Commissioning Team meetings.
 - 2. Integrate and coordinate commissioning process activities with the construction schedule.
 - 3. Provide all factory acceptance test reports to the CxA through the Commissioner.
 - 4. Respond to any additional specific information requests from the CxA. CxA may request additional documentation necessary for the commissioning process. Requests by CxA may precede, be concurrent with, or follow normal submittals.
 - 5. Ensure the cooperation and participation of all Subcontractors and manufacturers of equipment to be commissioned.
 - 6. Verify and confirm that components, equipment, and system are functioning as per design prior to CxA witnessing testing.
 - 7. Perform testing required in the Commissioning schedule as per the Commissioning process test procedures provided by the CxA, providing no less than 48 hours’ notice to the CxA through the Commissioner.
 - 8. Complete installation checklists as Work is completed and return to CxA through the Commissioner.



9. Provide written responses to the CxA through the Commissioner for resolution of Issues recorded in the Issues Log within five (5) business days.
10. Evaluate performance deficiencies identified in test reports and, in collaboration with entity responsible for system and equipment installation, recommend corrective action.
11. Submit operation and maintenance manuals for systems and subsystems, and equipment in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS. Such documents must be submitted prior to functional testing.
12. Submit As-Built documents in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
13. Provide orientation sessions for operations and maintenance personnel (sessions will be witnessed by the CxA) in accordance with Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION. Provide no less than 48 hours' notice to the CxA, through the Commissioner. Video record and edit orientation sessions and provide an electronic recording to the CxA and Commissioner no later than two (2) weeks after the orientation session occurs. Edit as requested by the Commissioner.

1.8 COMMISSIONING AGENT'S (CxA) RESPONSIBILITIES:

- A. Organize and lead the Commissioning Team.
- B. Prepare a construction-phase Commissioning Plan. Collaborate through the Commissioner with each Contractor and with Subcontractors to develop test and inspection procedures. Include design changes and coordinate Commissioning activities with the overall Project schedule. Identify Commissioning Team member responsibilities, by name, firm, and trade specialty, for performance of each commissioning task. Update the Commissioning Plan during construction as required.
- C. Review and comment in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, on submittals from the Contractor for compliance with the OPR, BOD, Contract Documents, and construction-phase Commissioning Plan. Review and comment on performance expectations of systems and equipment and interface between systems relating to the OPR and BOD.
- D. Coordinate with the Commissioner, in accordance with Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION, to convene Commissioning Team meetings for the purpose of coordination, communication and conflict resolution; discuss progress of the commissioning processes.
- E. At the beginning of the construction phase, coordinate with the Commissioner's kick-off meeting schedule to conduct an initial construction-phase coordination meeting for the purpose of reviewing the Commissioning activities and establishing tentative schedules for operation and maintenance submittals, operation and maintenance orientation sessions, TAB Work, testing, and Project completion.
- F. Perform site visits to observe and inspect construction as described in the Commissioning Plan. Report progress and deficiencies to the Commissioner. In addition to compliance with the OPR, BOD, and Contract Documents, inspect systems and equipment installation for adequate accessibility required for component maintenance replacement and repair.
- G. Prepare and distribute project-specific test and inspection procedures and checklists and maintain MEL.
- H. Verify air and water systems balancing by sampling, reviewing completed reports and selected site observation. Coordinate submittal reviews with the Commissioner so that the comments are combined into a single review and submitted to the Contractor.
- I. Coordinate with the Commissioner to witness and document tests, inspections and systems startup, as per the Commissioning Plan.



- J. Maintain an Issues Log and a record of functional testing. Report all Issues as they occur to the Commissioner.
- K. Compile test data, inspection reports and certificates, and include them in the systems manual and Commissioning Report.
- L. Certify date of acceptance and startup for each item of equipment for start of warranty periods.
- M. Review and comment on operation and maintenance documentation and systems manual outline for compliance with the OPR, BOD, and Contract Documents. Operation and maintenance documentation requirements are specified in other sections of the Project Specifications and described in Section 01 78 39 CONTRACT RECORD DOCUMENTS.
- N. Review agenda for orientation; witness and confirm orientation session conforms with agenda and Contract Documents; review recording of demonstration and orientation sessions provided by the Contractor on USB drive or other electronic media as requested by the Commissioner and provide appropriate comments for editing.
- O. Return to the site ten (10) months into the twelve (12)-month guaranty period, to review with facility staff the current building operation and the condition of outstanding Issues related to the original and seasonal commissioning. Interview facility staff and identify problems or concerns they have with operating the building as originally intended.
- P. Prepare Commissioning Reports.
- Q. Assemble the final commissioning documentation, including the Commissioning Report and Systems Manual.
- R. Perform all CxA tasks as defined by LEED and the NYC Energy Conservation Code; prepare LEED submittal documents and preliminary and final Commissioning Reports as required by the NYC Energy Conservation Code.

1.9 COMMISSIONING DOCUMENTATION:

The Contractor must assist the CxA in the development and compiling of the following Commissioning Documentation:

- A. Index of Commissioning Documents: The CxA will prepare an index including the storage location of each document.
- B. Commissioning Plan: A document prepared by the CxA that outlines the schedule, allocation of resources, roles and responsibilities, and documentation requirements of the Commissioning process.
- C. Test Checklists: The CxA will develop test checklists for each system, subsystem, or equipment including interfaces and interlocks, and include a separate entry, with space for comments, for each item to be tested. The CxA will prepare separate checklists for each mode of operation and provide space to indicate whether the mode under test responded as required. Space will be provided for testing personnel to sign off on each checklist. Specific checklist content requirements are specified in other sections of the Project Specifications, but must include without limitation:
 - 1. Identification of tested item
 - 2. Date of test
 - 3. Indication of whether the record is for a first test or retest following correction of a problem or Issue
 - 4. Dated signatures of the person performing the test and of the witness if applicable
 - 5. Deficiencies and Issues, if any, generated as a result of the test



- D. Inspection Checklists will be signed by the Contractor, Subcontractor(s), Installer(s), and CxA certifying that systems, subsystems, equipment, and associated controls are ready for testing.
- E. Test and Inspection Reports: The CxA will record test data, observations, and measurements on test checklists. Photographs, forms, and other means appropriate for the application will be included with data. CxA must compile test and inspection reports and test and inspection certificates and include them in systems manual and Commissioning Report.
- F. Corrective Action Documents: The CxA will document corrective action taken for systems and equipment that fail tests and include required modifications to systems and equipment and revisions to test procedures, if any. The Contractor must retest systems and equipment requiring corrective action. The CxA will document retest results.
- G. Issues Log: The CxA will prepare and maintain an Issues Log that describes design, installation, and performance Issues that are at variance with the OPR, BOD, and Contract Documents. The log will identify and track Issues as they are encountered, documenting the status of unresolved and resolved Issues. The Issues Log will identify, at a minimum:
 - 1. The party responsible for correcting the Issue,
 - 2. The person documenting the Issue resolution,
 - 3. The exact location of the Issue (floor and room),
 - 4. The applicable system component,
 - 5. A detailed description of the Issue,
 - 6. The Issue status, and
 - 7. The date the Issue was discovered and the date the Issue was resolved.
- H. Commissioning Report: The CxA will document results of the commissioning process including unresolved Issues and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been completed and are performing according to the OPR, BOD, and Contract Documents. The Commissioning Report must include:
 - 1. An executive summary, including participants and their roles, a brief building description, an overview of the commissioning and testing scope, and a general description of testing and verification methods,
 - 2. Installation/Pre-Functional Checklists,
 - 3. Start-up reports,
 - 4. Functional Test documentation,
 - 5. Trend Log Analysis,
 - 6. The final Issues Log, with all Issues identified through the commissioning process, identifying which, if any, Issues remain unresolved,
 - 7. The Commissioning Plan,
 - 8. Commissioning progress and field reports,
 - 9. Commissioning review documents, and
 - 10. Record of owner's orientation.
- I. Systems Manual: The CxA will gather required information and compile systems manual as specified in other sections of the Project Specifications and described in Section 01 78 39 CONTRACT RECORD DOCUMENTS.



1.10 SUBMITTALS:

- A. Submittal of shop drawings, product data, samples, etc., relevant to commissioning must be provided to the CxA as requested. Such submittals must be in compliance with Section 01 33 00 SUBMITTAL PROCEDURES.
- B. As-Built Contract Record Drawings and Operating and Maintenance Manuals relevant to commissioning must be provided to the CxA as requested. Such submittals must be in compliance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
- C. All demonstration and orientation submittals relevant to commissioning must be provided to the CxA as requested. Such submittals must be in compliance with Section 01 79 00 DEMONSTRATION AND OWNER'S PREACCEPTANCE ORIENTATION.
- D. Completed Prefunctional (Installation) Checklists must be provided to the CxA prior to equipment startup.

1.11 COORDINATION:

- A. Coordination of Commissioning is the responsibility of all Commissioning Team members.
- B. Coordinating Meetings: The CxA will coordinate with the Commissioner's regularly scheduled construction progress meetings to conduct coordination meetings of the Commissioning Team to review progress on the Commissioning Plan, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities. Commissioner and Contractor must ensure that all required Commissioning Team members attend.
- C. Construction Documents: The Contractor, through the Commissioner, will furnish copies of all construction documents, addenda, change orders and appropriate submittals and shop drawings to the CxA.
- D. Pre-testing Meetings: The CxA will coordinate with the Commissioner to conduct pretest meetings of the Commissioning Team to review startup reports, pretest inspection results, testing procedures, testing personnel and instrumentation requirements, and manufacturers' authorized service representative services for each system, subsystem, equipment, and component to be tested. Commissioner and Contractor must ensure that all required Commissioning Team members attend.
- E. Testing Coordination: Contractor must coordinate schedule times with the Commissioning Team, through the Commissioner, for tests, inspections, obtaining samples, and similar activities. The CxA will advise the Commissioning Team as to the sequence of testing activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
- F. Manufacturers' Field Services: The Contractor must coordinate manufacturers' field services, as per the Commissioning Plan.
- G. The CxA will regularly apprise the Commissioner of progress, pending problems and/or disputes, as well as provide regular status reports on progress with each system.

PART II – PRODUCTS

2.1 TEST EQUIPMENT

- A. All industry standard test equipment required for performing the specific tests must be provided by the Contractor responsible for testing. Any proprietary Vendor-specific test equipment must be provided by that Vendor or Manufacturer.
- B. Special equipment, tools, instruments, software, and equipment communication network access hardware and software (only available from Vendor, specific to the piece of equipment) required for testing equipment according to the Contract Documents must be included at no extra cost to the City and must be turned over



to the City at Project close-out, except for stand-alone data logging equipment that may be used by the CxA.

- C. Any portable or handheld setup and/or calibration devices required to initialize the control system must be made available by the control vendor for use by the CxA at no additional cost to the City.
- D. The instrumentation used in the commissioning process must comply with the following:
 - 1. Be of sufficient quality and accuracy to test and/or measure system performance within the tolerances required
 - 2. Be calibrated at the manufacturer's recommended intervals with calibration tags permanently affixed to the instrument
 - 3. Be maintained in good repair and operating condition throughout use duration on this Project
 - 4. Be immediately recalibrated or repaired if dropped and/or damaged in any way during this Project.

PART III – EXECUTION

3.1 COMMISSIONING PROCESS

- A. The following provides an overview of the Commissioning tasks during Project construction and the general order in which they occur.
 - 1. Construction-phase Commissioning begins with a Commissioning Kickoff Meeting, conducted by the CxA through the Commissioner in accordance with section 01 31 00 PROJECT MANAGEMENT AND COORDINATION, where the Commissioning process is reviewed with all the Commissioning Team Members.
 - 2. Additional meetings may be required throughout construction, scheduled by the CxA through the Commissioner in accordance with 01 31 00 PROJECT MANAGEMENT AND COORDINATION with necessary parties attending, to plan, scope, coordinate and schedule future activities and resolve open Issues.
 - 3. The CxA will review the Contractor submittals concurrent with the Commissioner and provide comments to the Commissioner for inclusion in their review. The reviewed submittals will include all commissioned equipment information, including detailed startup procedures, and coordination drawings that include commissioned equipment and systems, control drawings and sequences, and interfaces and interlocks between systems.
 - 4. The CxA works with the Commissioner and Contractor in developing Pre-functional and Functional Test documentation formats.
 - 5. Periodically throughout the construction process, the CxA will perform site visits to observe component and system installations.
 - 6. The checkout and performance verification generally proceeds from component level to equipment to systems and intersystem levels. Pre-functional (Installation) Checklists are to be completed before equipment startup. Equipment startup must be completed before TAB. TAB must be completed before the Functional Performance Checklists.
 - 7. The Contractor must, with guidance from the CxA, execute and document the Pre-Functional (Installation) Checklists and perform startup and initial checkout of equipment and systems. The CxA documents that the checklists and startup are completed according to the approved plans. This will include the CxA witnessing selected assembly markups, portions of the startup of selected equipment, and spot checking the Pre-Functional (Installation) Checklists.
 - 8. The CxA develops specific equipment and system Functional Checklists. The Contractor receives a copy of the procedure through the Commissioner. The CxA may request additional design



narrative from the Commissioner and Controls Contractor, depending on the completeness of the Basis of Design and sequences provided within the design documents.

9. The Functional Checklists are executed by the Contractor and witnessed and documented by the CxA.
10. Items of non-compliance in material, installation startup, and operation are corrected and the equipment or system is rechecked. The CxA will maintain an Issues Log to track Issues and Issue resolution.
11. The CxA will review the Operation & Maintenance documentation for completeness.
12. Commissioning, excluding the Warranty Walkthrough and any seasonal testing at the written direction of the Commissioner, must be completed prior to Substantial Completion.
13. The CxA reviews the orientation documentation. The orientation schedules and agenda are provided by the subcontractors. The CxA verifies that orientation is completed, attended by the appropriate City of New York personnel, is thorough and provides all necessary information required to operate and service the equipment or system.
14. Deferred testing/checkouts are conducted, as specified or required in the Contract Documents.

3.2 COMMISSIONING PLAN AND SCHEDULE

- A. Commissioning Plan: The Commissioning Plan provides guidance in the execution of the commissioning process. After the initial construction phase Commissioning kickoff meeting, the CxA will update the plan. This plan is a living document that must evolve and expand as the Project progresses. The Commissioning Plan must include:
 1. Description of the facility and Project.
 2. Description of the commissioning process and associated deliverable documents.
 3. Description of equipment and systems to be commissioned.
 4. Description of schedules for testing procedures along with identification of parties involved in performing and verifying tests.
 5. Sample rates for equipment to be tested.
 6. Identification of task items that must be completed before the next operation can proceed.
 7. Description of responsibilities of Commissioning Team members.
 8. Description of observations to be made and reported on during testing and witnessing of testing by all parties involved in the Project.
- B. Commissioning Schedule: Contractor must provide construction schedules to the CxA, in accordance with Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION. The CxA will develop and submit a schedule identifying the commissioning process and provide commissioning scheduling information to the Commissioner and Contractor for review and planning activities. The Contractor must incorporate the CxA's activities into the Project schedule.

3.3 TESTING PROCEDURES

- A. The CxA will determine and document the acceptance procedures for each system within disciplines. The acceptance procedures must incorporate the commissioning standards and successful testing results as referred to throughout the Specifications.



- B. The CxA will provide performance checklists and performance checkout data sheets for each system based on actual system configuration. Special emphasis must be placed on checkout procedures that must conclusively determine actual system performance and compliance with the OPR and BoD.
- C. The Contractor and appropriate Vendor(s) must be informed of what tests are to be performed and the expected results. The Commissioning Plan must address the test requirements and be distributed to all parties involved with that system.
- D. Prior to Functional Testing, the Contractor must provide the following:
 - 1. Contractor must certify in writing that commissioned systems, subsystems, and equipment have been installed, calibrated and started, and are operating according to the Contract Documents.
 - 2. Contractor must certify in writing that all relevant instrumentation and control systems have been completed and calibrated; are operating according to the Contract Documents; and that pretest set points have been recorded.
 - 3. Contractor must certify in writing that TAB procedures have been completed, and that the TAB report has been submitted, discrepancies corrected, and corrective work approved.
 - 4. Contractor must perform tests for system and intersystem performance only after CxA and Commissioner have approved the completed testing checklists for systems, subsystems, and equipment.
- E. The Functional Performance tests must be performed by the Contractor and Vendor(s) with oversight by the CxA. The CxA must witness, verify, and document these tests.
 - 1. Functional Performance Tests must include operating the systems and components through each of the written sequences of operation, other significant modes of miscellaneous alarms, power failure, and security alarm when impacted by and interlocked with commissioned equipment, as detailed in the Commissioning Plan.
 - 2. Checklists must be completed comprehensively and to the extent necessary to enable the CxA to assure the Commissioner that the systems perform as per the OPR, BOD, and Contract Documents.
 - 3. If a test is failed for any reason and retesting is required, the Contractor must provide retesting at no additional cost to the City.
 - 4. If a test must be witnessed more than twice by the Commissioning Agent due to repeated failure to perform as per the design documents, the Contractor must be responsible for the Commissioning Agent's fee for witnessing repeated tests beyond the second incidence. Such fee will be negotiated between the Commissioning Agent and the Commissioner.
 - 5. After testing, Contractor must return settings to normal operating conditions.

3.4 OPERATION & MAINTENANCE MANUALS

- A. General
 - 1. The CxA must review the Operation & Maintenance manuals provided by the Contractor for completeness of the document. The review process will verify that Operation & Maintenance instructions meet Specifications and are included for all commissioned equipment furnished by the Contractor.
 - 2. Published literature will be specifically oriented to the provided equipment, indicating required operation and maintenance procedures, parts lists, assembly / disassembly diagrams and related information.



3. The Contractor must incorporate the standard technical literature into system-specific formats for this facility as designed and as actually installed. The resulting Operation & Maintenance information must be system-specific, concise, to the point and tailored specifically to this facility. The CxA must review these documents as necessary for final corrections by the Contractor.
 4. Contractor must submit Operations & Maintenance Manuals for each piece of equipment for review no later than 45 days after submittal approval.
- B. The Operation & Maintenance Manual review and coordination efforts must be completed prior to Owner orientation sessions, as these documents are to be utilized in the orientation sessions.
- C. System Operations Manual
1. The CxA must prepare and deliver these documents with inputs from the Contractor. The Contractor must provide all required documents to the CxA, through the Commissioner. The required documents must be described in the Commissioning Plan and Contract Documents. Typically, the manual includes the following:
 - a. System, subsystem, and equipment descriptions
 - b. Commissioned systems single line diagrams (to be provided by Mechanical, Electrical, Plumbing, and Building Management System (BMS) subcontractors).
 - c. As built sequences of operations, control drawings and original set points (to be provided by Design Consultant and BMS subcontractor).
 - d. Operating instructions for integrated building systems (to be provided by Mechanical and BMS subcontractors).
 - e. Recommended schedule of maintenance requirements and frequency (to be provided by subcontractors).
 - f. Recommended schedule for calibrating sensors and actuators (to be provided by BMS subcontractor).

3.5 DEMONSTRATION AND INSTRUCTION

- A. The Contractor must schedule and coordinate instruction sessions for the facility's staff for each commissioned system. Demonstrations must be held per Contract Documents, along with the appropriate schematics, handouts and visual / audio orientation aids onsite with equipment.
- B. The equipment vendors must provide instruction on the specifics of each major equipment item including philosophy, troubleshooting and repair techniques.
- C. The Contractor must record and edit demonstration and orientation sessions, and provide these records to the CxA, through the Commissioner.
- D. For additional direction pertinent to instruction, refer to other specific divisions for demonstration and instruction requirements.

3.6 WARRANTY REVIEW / SEASONAL TESTING

- A. The CxA will return upon the start of the new season (cooling or heating) after Project completion to conduct performance tests that could not be performed due to ambient conditions. The seasonal testing will only be performed if suitable loads / conditions were unavailable during the performance testing stages (in other words; the requirement for testing is warranted), and at the written direction of the Commissioner.
- B. The CxA will return to the site approximately ten (10) months into the twelve (12)-month guaranty period and interview the occupants and maintenance staff, review the operation of the building, provide recommendations for installation and operational problems and document warranty and operational Issues in the Issues database.



3.7 RECORD DRAWINGS

- A. The CxA must review the as built Contract Documents to verify incorporation of both design changes and as-built construction details. Discrepancies noted must be corrected by the appropriate party.

END OF SECTION 01 91 13



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)



**SECTION 01 91 15
GENERAL COMMISSIONING REQUIREMENTS FOR BUILDING ENCLOSURE**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 91 15

PART I – GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The Owner's Project Requirements (OPR) and Basis of Design (BOD) documents are included by reference for information only.
- C. The Commissioning Plan, prepared by the Commissioning Agent (CxA) under separate contract with the City of New York, contains requirements that apply to this section.

1.2 SECTION INCLUDES

- A. This section includes the commissioning requirements for the Building Enclosure systems. Refer to "Exterior Enclosure Commissioning" in other sections of the Project Specifications for specific requirements regarding Building Enclosure Commissioning.
 - 1. The commissioning requirements for the Building Enclosure systems given in this section are entirely separate from, and in addition to, the Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS for this Project. The Contractor, and his/her Suppliers, Subcontractors, Vendors, etc., are required to participate in both commissioning processes as required.

1.3 DESCRIPTION

- A. Building Enclosure Commissioning (BECx) is a systematic process of ensuring all building enclosure systems responsible for environmental separation perform as per the OPR and BOD. The BECx process is intended to verify and document proper installation and performance of building enclosure materials and systems in accordance with the Contract Documents.
- B. Commissioning does not take away from, or reduce, the Contractor's responsibility to provide a finished and fully functioning product and installation.
- C. This section will in no way diminish the responsibility of the Contractor in performing all aspects of work and testing as outlined in the Contract Documents. Any requirements outlined in this section are in addition to requirements outlined in the Contract Drawings and Specifications.

1.4 RELATED WORK

- A. Specific BECx requirements are given in this Section. The following Project Specification sections are related to the commissioning work specified in this section:
 - 1. Basic Concrete Requirements: Refer to Division 03
 - 2. Basic Metal Requirements: Refer to Division 05
 - 3. Basic Waterproofing, Roofing, Air Barrier and Insulation Requirements: Refer to Division 07
 - 4. Basic Fenestrations Requirements: Refer to Division 08
 - 5. Basic Finishing Requirements: Refer to Division 09



1.5 DEFINITIONS AND ABBREVIATIONS

A. Refer to Article 2 of the Contract and Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS for terms, words, and expressions not otherwise defined herein.

Approval	Acceptance that a material or system has been properly installed and is functioning in tested modes according to the Contract Documents.
Building Enclosure Commissioning Agent (BECA)	BECA directs and coordinates day-to-day BECx commissioning activities.
Building Enclosure Testing Agency (BETA)	Building Enclosure Testing Agency whom is an independent agency retained by the Contractor and approved by the Commissioner, fully accredited by the appropriate governing body for each of the materials, components or systems to be tested or evaluated for compliance with requirements of the Contract Documents and as directed by the BECA. Documentation of such certification must be submitted to and approved by the Commissioner prior to the start of any work by the BETA.
Commissioning	Commissioning is a systematic process of ensuring and documenting that the building systems have been installed in the prescribed manner, are functionally checked and capable of being operated and maintained to perform with the design intent, and have documentation to support proper installation and operation. The process does not eliminate or reduce the responsibility of the installing subcontractors to provide a finished product.
Commissioning Agent (CxA)	Refer to Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS for Definition.
Commissioning Plan	Refer to Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS for Definition.
Deficiency	Condition of a building enclosure material or system that is not in compliance with Contract Documents (that is, does not perform properly or does not comply with design intent).
Design Consultant	Refer to Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS FOR MEP SYSTEMS for Definition.
Simulated Condition	Condition created for testing component or system (e.g., applying pressure differential across the building enclosure concurrent with water spray to simulate a wind driven rain).
Mock-up	The activities where systems or materials are initially constructed and tested.

1.6 COORDINATION

A. Building Enclosure Commissioning Team: Members of the Building Enclosure Commissioning Team will consist of:

1. CxA
2. BECA
3. BETA
4. Commissioner
5. Contractor, and all Building Enclosure Subcontractors
6. Design Consultant

B. Management: City of New York will contract services of the BECA through a separate contract. The BECA will direct and coordinate commissioning activities and report to the Commissioner. All members of the



Building Enclosure Commissioning Team must cooperate to fulfill contracted responsibilities and objectives of the Contract Documents.

- C. Scheduling: BECA must work with the Building Enclosure Commissioning Team to establish required commissioning activities to incorporate into the preliminary commissioning schedule. The Contractor must integrate commissioning activities into master construction schedule, in accordance with Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION. Necessary notifications are to be made in a timely manner in order to expedite commissioning.

1.7 SUBMITTALS

- A. Contractor must provide documentation required for commissioning work in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. At minimum, documentation must include, but not be limited to:
1. Submittal of shop drawings, product data, samples, etc., relevant to BECx and as requested by the BECA. Such submittals must be in compliance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 2. As-Built Record Drawings and Operation and Maintenance Information relevant to BECx and as required by the BECA. Such submittals must be in compliance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 3. All demonstration and orientation submittals relevant to BECx and as requested by the BECA. Such submittals must be in compliance with Section 01 79 00 DEMONSTRATION AND OWNER'S PREACCEPTANCE ORIENTATION.
 4. Performance data, any performance test procedures, and installation and checkout materials.
- B. The Contractor must provide all submittals to the Design Consultant, as per Section 01 33 00 SUBMITTAL PROCEDURES. The Design Consultant will transmit all building enclosure related submittals to the BECA for concurrent review.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 SYSTEMS TO BE COMMISSIONED

- A. Building Enclosure systems to be commissioned may include, but are not limited to, Roof waterproofing, including garden roof systems, all penetrations, and transitions; skylights and other sloped glazing; exterior walls, including the air barrier system, water management systems, and thermal insulation; punched windows, window walls, curtain walls, storefronts, glazed entries, doors, and louvers; sealants, expansion joints, and control joints; flashings, including all transitions and end-dams; terrace, balcony, and deck waterproofing; below-grade waterproofing, including drainage, waterproofing and damp proofing; below slab floor barriers; interface and transition conditions between exterior enclosure components and systems; smoke controls and fire separation and stopping; and any other special building enclosure systems, equipment, and controls. Refer to the Contract Documents for clarity.

3.2 RESPONSIBILITIES OF COMMISSIONING TEAM MEMBERS DURING CONSTRUCTION PHASE

- A. Responsibilities of the Design Consultant include without limitation the following:
1. Review BECA comments on construction documents and shop drawings.
 2. Assist in dispute resolution regarding building enclosure items.
 3. Review BECA reports.
 4. Incorporate BECA Submittal Review Comments into response on submittals.
- B. Responsibilities of the BECA include the following without limitation:



1. Review and comment on Mock-up construction and testing plan as provided by Contractor.
 2. Development of BECx Plan.
 3. Review of building enclosure shop drawings and submittals, including “approved equal” requests, through the Commissioner in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.
 4. Attend combined pre-construction and BECx kick-off meeting.
 5. Develop construction checklists for the building enclosure for the Contractor’s use.
 6. Observe the construction of a building enclosure Mock-up.
 7. Witness the testing of a building enclosure Mock-up.
 8. Project meetings / conference calls / coordination.
 9. Field monitor installation of exterior enclosure components.
 10. Update field report log.
 11. Update BECx Plan.
 12. Advise on Requests for Information.
 13. Assist with the preparation of LEED paperwork.
 14. Prepare systems manual, with required inputs and documentation from the Contractor in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 15. Complete Maintenance Plan, with required inputs and documentation from the Contractor in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 16. Prepare training manual, with required inputs and documentation from the Contractor in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.
 17. Prepare final BECx record and enclosure commissioning close-out documents.
 18. Develop on-going BECx Plan.
- C. Responsibilities of the Contractor and Building Enclosure Subcontractors include without limitation the following:
1. Review BECx Plan and FPT specification.
 2. Attend commissioning kick-off meeting and other Building Enclosure Commissioning Team meetings.
 3. Incorporate commissioning activities into the construction schedule.
 4. Periodically update Commissioning activities in the construction schedule.
 5. Notify Commissioner and BECA of work completion.
 6. Verify building enclosure materials and assemblies are ready for functional testing.
 7. Retain the services of an approved independent BETA; submit qualifications of independent BETA to Commissioner for approval; coordinate all activities and deliverables of this BETA; ensure all BETA deliverables are provided to the Building Enclosure Commissioning Team.
 8. Attend all required material and systems testing.
 9. Execute all periodic maintenance or repairs required on started systems from initial Mock-up of equipment to Final Acceptance by Commissioner to prevent material warranties from being voided.
 10. Submit maintenance logs of all interim maintenance or repair tasks performed by Contractor.



11. Ensure installation work is complete, is in compliance with Contract Documents, and is ready for Functional Performance Testing. FPT test results will be documented by BECA.
 12. Ensure resolution of non-compliance and deficiencies in construction or test results. Obtain written documentation of completion from the appropriate subcontractors.
 13. Provide letters of compatibility for adjacent building enclosure materials and assemblies.
 14. Facilitate all repairs and retesting of failed condition at no additional cost to the City of New York.
 15. Provide all warranty information to BECA.
- D. Responsibilities of the BETA include without limitation the following:
1. Attend Commissioning kick-off meeting and other Building Enclosure Commissioning Team meetings.
 2. Provide on-site technician and equipment to complete Mock-up and field Functional Performance Testing.
 3. Prepare and submit reports to the Commissioner at the conclusion of all testing.
 4. Perform retesting and prepare corresponding reports.

3.3 BUILDING ENCLOSURE COMMISSIONING TEAM (BECx) MEETINGS

- A. BECx meetings will be held periodically, as determined by the Commissioner and recommended by BECA.
- B. Discussions held in BECx meetings must include, but not be limited to: system/materials, mock-up/field, progress, scheduling, testing, documentation, deficiencies, and problem resolution.
- C. The Contractor must attend BECx meetings, and must ensure the attendance of required subcontractors, as requested.

3.4 REPORTING

- A. BECA will provide status reports to the Commissioner. The Commissioner will provide such status reports to the Contactor, CxA, Design Consultant, and other entities as needed.
- B. BECA will submit non-compliance and deficiency reports to Commissioner. The Commissioner will provide such reports to the Contractor, CxA, Design Consultant, and other entities as needed.
- C. BECA will provide a final summary report to Commissioner and CxA.

3.5 MOCK-UP AND FINAL CONSTRUCTION

- A. Prior to Functional Performance Testing or concealment of functional performance layers within the building enclosure, the Contractor must verify that all assemblies are complete, including deficiency long items, and all Contract requirements are met.

3.6 FUNCTIONAL PERFORMANCE TESTING

- A. Objectives and Scope
 1. The objective of Functional Performance Testing is to demonstrate that the building enclosure is performing according to documented design intent and Contract Documents. Functional Performance Testing ensures and documents that the building enclosure systems are fully operational. Additionally, during Functional Performance Testing, areas of deficient performance are identified and corrected, improving building enclosure system performance.
- B. Development of Test Procedures



1. The purpose of a specific test is to verify and document compliance of the installed enclosure systems with the OPR. Building Enclosure Functional Performance Test Protocols are provided in other sections of the Project Specifications for specific requirements regarding BECx.

C. Coordination and Scheduling

1. Contractor must provide sufficient notice to BECA, through the Commissioner, regarding completion schedule for materials and systems. Testing to be performed in conjunction with site visits. Contractor must schedule Functional Performance Tests with Commissioning Team. BECA must witness and document functional testing of equipment and systems. BETA, as retained by the Contractor, must execute tests under direction of BECA.
2. Successful completion of Mock-up functional performance testing must occur prior to full production installation of building enclosure materials and systems.

3.7 DOCUMENTATION, NON-CONFORMANCE, AND APPROVAL OF TESTS

A. Documentation

1. BECA must witness and document results of FPT.

B. Non-Conformance

1. BECA must record results of functional testing. Deficiency or non-conformance issues must be noted and reported to the Commissioner. The Commissioner must provide such non-conformance reports to the CxA, Design Consultant, Contractor, and other entities, as needed.
2. Corrections of minor deficiencies identified may be made during tests at the discretion of the Commissioner and as recommended by the BECA. In such cases, deficiency and resolution must be documented.
3. Every effort must be made to expedite testing and minimize unnecessary delays, while not compromising integrity of tests.
4. Deficiencies are handled in the following manner:
 - a) BECA documents deficiencies and notes Contractor's response and intentions. A finding of deficiency will not end the testing process.
 - b) BECA submits deficiency report to the Commissioner. The Commissioner will provide such deficiency report to the CxA, Contractor, Design Consultant, and other entities as required.
 - c) Contractor corrects deficiency and certifies that material or assembly is ready to be retested.
 - d) Contractor informs Commissioner of retesting schedule for coordination with the BECA.
 - e) Contractor reschedules test with the Commissioner and BETA at no additional cost to the City of New York.
 - f) If a test must be witnessed more than twice by the BECA due to repeated failure to perform as per the design documents, the Contractor must be responsible for the BECA's fee for witnessing repeated tests beyond the second incidence. Such fee will be negotiated between the BECA and the Commissioner.

C. Testing

1. Costs for all testing and retesting required for the Project will be the responsibility of the Contractor. The Contractor is to provide access to the test specimens to the Commissioning Team, through the Commissioner.



3.8 COMMISSIONING DOCUMENTATION

A. Final Report Details

1. Final BECx Report must include an executive summary, list of participants and roles, brief building description, overview of Commissioning and testing scope, and general description of testing and verification methods. Report must contain evaluation regarding:
 - a) Conformance to Specifications and design intent.
 - b) Material/system installation.
 - c) Functional performance.
2. All outstanding non-compliance items must be specifically listed.
3. Recommendations for improvement to system or operations, future actions, etc. must also be listed.

END OF SECTION 01 91 15



**Department of
Design and
Construction**

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date: July 1, 2022

(No Text on This Page)

FMS ID: CO283TOIL



Department of Design and Construction

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

LOCATION: 100 Centre Street
BOROUGH: Manhattan, NY 10013
CITY OF NEW YORK

Contractor

Dated _____, 20____

Approved as to Form
Certified as to Legal Authority

Acting Corporation Counsel

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated _____, 20____





**Department of
Design and
Construction**

PROJECT ID:

CO283TOIL

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 3 OF 3

**ADDENDUM TO THE GENERAL
CONDITIONS**

SPECIFICATIONS

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR:

**Manhattan Criminal Court Public
Restrooms Renovation and Holding
Cells Accessibility Upgrade**

**LOCATION:
BOROUGH:
CITY OF NEW YORK**

**100 Centre Street
Manhattan, NY 10013**


CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

DCAS

Circular

Date: February 28, 2024





**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

**ADDENDUM TO THE GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS**

**The General Conditions are hereby amended in accordance
with the terms and conditions set forth in this Addendum.**

I. PROJECT DESCRIPTION

FMS #: CO283TOIL

PROJECT NAME: Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

PROJECT DESCRIPTION: This Project consists of the renovation/alteration and accessibility upgrade of the Manhattan Criminal Court's public restrooms and the Department of Corrections' holding cells present within the Criminal Court's facility.

PROJECT LOCATION: 100 Centre Street
BOROUGH: Manhattan
CITY OF NEW YORK
ZIP CODE: 10013
COMMUNITY BOARD #: Manhattan 1

LANDMARK STATUS:

DESIGNATED LANDMARK STRUCTURE OR SITE: NO
If this is a Designated Landmark Structure or Site, Section 01 3591, Historic Treatment Procedures applies to this project.

LANDMARK QUALITY STRUCTURE: YES
If this is a Landmark Quality Structure, Section 01 3591, Historic Treatment Procedures applies to this project.

II. LEED GREEN BUILDING REQUIREMENTS

NOT USED

III. COMMISSIONING REQUIREMENTS

NOT USED

IV. PROJECT MANAGEMENT

DDC shall publicly bid and enter into all contracts for the Project. DDC shall manage the Project using its own personnel.

DDC shall publicly bid and enter into all contracts for the Project. A Construction Management firm (the "CM") hired by DDC shall manage the Project. The Contractor is advised that the CM shall serve as the representative of the Commissioner at the site and shall, subject to review by the Commissioner, be responsible for the inspection, management, coordination and administration of the required construction work, as delineated in the article of the Standard Construction Contract entitled "The Resident Engineer".

V. CONTRACTS FOR THE PROJECT

The Project consists of a single contract, the Contract for General Construction Work. The Contractor for General Construction Work is responsible for the performance of all required work for the Project as set forth in the Contract Documents (General Conditions, Drawings and Specifications), including all responsibilities and obligations assigned to separate Contractors for the following subdivisions of the work: Plumbing Work, HVAC Work, and Electrical Work. All responsibilities and obligations in the Contract Documents assigned to separate Contractors for such subdivisions of the work are the responsibility of the Contractor for General Construction Work.

VI. SCHEDULES

The Contractor is advised that Schedules A through E are attached to, and incorporated as part of, this Addendum to the General Conditions. These schedules contain important information that is specific to this Project. The Contractor is advised to carefully review these schedules.

VII. APPLICABILITY OF SECTIONS/SUB-SECTIONS AND AMENDED SUB-SECTIONS

The Contractor is advised that various Sections/Sub-Sections in the General Conditions may not apply to this Project or may apply as amended. Such Sections/Sub-Sections advise the Contractor to "Refer to the Addendum for the applicability of this Section/Sub-Section." Such Sections/Sub-Sections are set forth below. A check mark indicates whether the Section/Sub-Section (1) applies to the Project, (2) does not apply to the Project, or (3) applies to the Project as amended. If no box is checked, the Section/Sub-Section, as set forth in the General Conditions, applies to the Project. Amended Sections/Sub-Sections, if any, are set forth following this list of Sections.

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 1000	1.4 (B)	Scope and Intent / LEED		X	
	1.4(C)	Scope and Intent / Commissioning		X	
01 22 00		Expanded Work Allowance	X		
01 3216.10		Project Schedules (Method A)		X	
01 3216.20		Project Schedules (Method B)	X		
01 3216.30		Project Schedules (Method C)		X	
	1.7 Q	Cost Loaded Schedule		X	
01 3233		Photographic Documentation		X	
01 3300	1.7 (A-D)	LEED Submittals		X	
01 3503		General Mechanical Requirements		X	
01 3506	3.2 (A-B)	Electrical Conduit System Including Boxes (Pull, Junction and Outlet)		X	
	3.3 (A-E)	Electrical Wiring Devices		X	
	3.4 (A-I)	Electrical Conductors and Terminations		X	
	3.5 (A-B)	Circuit Protective Devices		X	
	3.6 (A-J)	Distribution Centers		X	
	3.7 (A-I)	Motors		X	
	3.8 (A-I)	Motor Control Equipment		X	
01 3591		Historic Treatment Procedures		X	
01 5000	3.2 (A)	Temporary Water Facilities / Temporary Water		X	
	3.2 (B)	Temporary Water Facilities / Temporary Water – Work in Existing Facilities		X	
	3.3 (B)	Temporary Sanitary Facilities / Self-Contained Toilet Units		X	
	3.3 (C)	Temporary Sanitary Facilities / Existing Toilets	X		
	3.4 (B) 1	Temporary Power, Lighting, and Site Lighting / Connection to Utility Lines		X	
	3.4 (B) 2	Temporary Power, Lighting, and Site Lighting / Connection to Existing Electrical Power Service	X		
	3.4 (B) 3	Temporary Power, Lighting, and Site Lighting / Electrical Generator Power Service		X	
	3.4 (D)	Temporary Power, Lighting, and Site Lighting / Temporary Lighting		X	
	3.4 (E)	Temporary Power, Lighting, and Site Lighting / Site Security Lighting (for New Construction Only)		X	
	3.5 (A-J)	Temporary Heat		X	
	3.8 (A)	DDC Field Office / Office Space in Existing Building	X		

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 5000	3.8 (B)	DDC Field Office / DDC Field Office Trailer		X	
	3.8 (B-3a)	DDC Field Office / DDC Managed Field Office Trailer		X	
	3.8 (B-3b)	DDC Field Office / CM Managed Field Office Trailer		X	
	3.8 (D)	DDC Field Office / Additional Equipment for the DDC Field Office		X	
	3.13(A-D)	Work Fence Enclosure		X	
	3.17(B)	Project Rendering		X	
	3.18 (A-C)	Security Guards / Fire Guards on Site		X	
01 5411	3.1 (A-J)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Up To and Including 15 Stories		X	
	3.2 (A-M)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Over 15 Stories		X	
	3.3 (A-E)	Temporary Use, Operation and Maintenance of Elevators During Construction for Existing Buildings		X	
01 7300	3.3 (A-I)	Surveys		X	
	3.4 (A-B)	Borings		X	
	3.12 (A-D)	Sleeves and Hangers		X	
	3.13 (A)	Sleeve and Penetration Drawings		X	
	3.15 (A)	Location of Partitions		X	
01 7419	1.5 (C)	Waste Management Performance Requirements / LEED Certification		X	
01 7900		Demonstration and Owner's Pre-Acceptance Orientation		X	
01 8113.03		Sustainable Design Requirements for LEED v3 Buildings		X	
01 8113.04		Sustainable Design Requirements for LEED v4 Buildings		X	
01 81 13.10		Environmentally Preferable Purchasing (EPP) Compliance		X	
01 8113.13		VOC Limits for Adhesives, Sealants, Paints and Coatings for LEED v3 Buildings		X	
01 8119		Indoor Air Quality Requirements for LEED Buildings		X	
01 9113		General Commissioning Requirements for MEP Systems		X	
01 9115		General Commissioning Requirements for Building Enclosure		X	

ADDITIONAL SECTIONS/SUB-SECTIONS

The Contractor is advised that the additional Sub-Sections set forth below are included in the General Conditions and apply to the Project.

013100 PROJECT MANAGEMENT AND COORDINATION

Add the following language:

1.10 BUILDING HOURS:

- A. The Manhattan Criminal Courthouse building hours are 24 hours, 7 days a week.
- B. Regular business hours are 9:00am-5:00pm.
- C. The building will be open during construction. Work may commence during the entirety of business hours.
- D. Staging for construction is permitted on premises.
- E. Per the security protocol, to enter the building all personnel must go through a security checkpoint with proper ID. Regarding individual court preferences, demolition and noise will be kept at a minimum during business hours due to courts being in session.

VIII. SPECIAL EXPERIENCE REQUIREMENTS FOR THE PROJECT

Refer to the PASSPort Questionnaire for Special Experience Requirements.

IX. REVISIONS: SPECIFICATIONS AND CONTRACT DRAWINGS

The Specifications and the Contract Drawings for the Project are revised in accordance with the provisions set forth below.

- (1) Owner: Wherever the term "Owner" is used in the Specifications and/or the Contract Drawings, such term shall mean the City of New York.
- (2) Other Entities: In the event any entity other than the City of New York is referred to or named as the "Owner" in the Specifications and/or the Contract Drawings, the name of such other entity is deemed deleted and replaced with the "City of New York".
- (3) Architect / Engineer: Wherever the words "Architect", "Engineer", "Architect / Engineer" or "Architect and/or Engineer" are used in the Specifications and/or the Contract Drawings, such words are deemed deleted and replaced with the word "Commissioner".
- (4) Products / Manufacturers: Wherever the Specifications and/or the Contract Drawings require the Contractor to provide a particular product (i.e., material and/or equipment) from a designated manufacturer and/or vendor, the term "or approved equal" is deemed inserted, even if only one product and/or manufacturer is specified, except as otherwise provided below.
 - (a) Proprietary Items: If the Documents section in PASSPort contains a Notice which identifies a particular product from a designated manufacturer as a "Sole Source Product, the Contractor shall be required to provide such specified product. In such case, no substitution or "approved equal" will be permitted.
- (5) Special Experience Requirements: Special Experience Requirements for the Project, if any, are set forth in the PASSPort Questionnaire. Special Experience Requirements may apply to Contractors, subcontractors, installers, fabricators, applicators, erectors, specialists, manufacturers and/or suppliers. Refer to DDC General Conditions Section 014000 Article 1.7.C for applicable Special Experience qualification levels. If the Specifications and/or the Contract Drawings contain any Special Experience Requirement that is not set forth in the PASSPort Questionnaire, such Special Experience Requirement is deemed deleted, except as otherwise provided below.
 - (a) Any Special Experience Requirement that provides that the entity performing the work or supplying the material must have more than three (3) years of experience, is revised to provide that the entity performing the work or supplying the material must have three (3) years of experience as noted in DDC General Conditions Section 014000 Quality Requirements, Article 1.7.B, except as described in paragraph (b) below.
 - (b) Any Special Experience Requirement that pertains to the abatement of hazardous materials must not be subject to the deletion and/or revision set forth above. Such Special Experience Requirement will remain in full force and effect.
 - (c) Any Special Experience Requirement that provides that the individual workers performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such individual workers must be properly trained for the specified work.
- (6) Alternate Bids: If the agency is requesting the submission of Alternate Bids, a Notice regarding such Alternate Bids is set forth in the Documents section in PASSPort. In the event of any conflict or inconsistency between (1) the Notice regarding Alternate Bids set forth in the Documents section in PASSPort and (2) a provision in the Specifications and/or the Contract Drawings regarding Alternate Bids, the Notice set forth in the Documents section shall prevail. If the agency is not requesting the submission of Alternate Bids, as indicated by the absence of a Notice in the Documents section in PASSPort, and the Specifications and/or the Contract Drawings contain any provision regarding Alternate Bids, such provision is deemed deleted.
- (7) Contractor Retained Engineer: If the Specifications and/or the Contract Drawings require the Contractor to retain an Engineer to provide engineering services for the Project, the following sentence is deemed inserted: "Such Engineer must be a Professional Engineer, licensed in the State of New York."
- (8) LEED Related Provisions: If the Specifications and/or the Contract Drawings require the Contractor to purchase FSC certified wood, rapidly renewable materials, or materials within 500 miles (LEED v3) or 100 miles (LEED

v4), such provisions are deemed deleted and replaced with the requirement that if the Contractor has purchased FSC certified wood, rapidly renewable materials, or materials within 500 miles (LEED v3) or 100 miles (LEED v4), the Contractor shall submit such forms or documentation as may be required by the City in order for the USGBC to certify that the Project qualifies for the related LEED credit(s).

- (9) Guarantees: Requirements for Guarantees and Maintenance are set forth in Schedule B, which is included in the Addendum to the General Conditions. In the event of any conflict or inconsistency between (1) a guarantee and/or maintenance requirement set forth in the Specifications and/or the Contract Drawings and (2) a guarantee and/or maintenance requirement set forth in Schedule B, the guarantee and/or maintenance requirement set forth in Schedule B shall prevail.
- (10) Warranties: Requirements for Warranties are set forth in Schedule B, which is included in the Addendum to the General Conditions.
- (a) The term “manufacturer’s warranty” as described in this article encompasses the following terms as indicated in the Specifications: “Manufacturer’s Warranty”, “Manufacturer’s Special Warranty”, “Special Warranty”, “Special Finish Warranty”, “Manufacturer’s Special Warranty for a (product, assembly).”
 - (b) In the event of any conflict or inconsistency between (1) a warranty requirement set forth in the Specifications and/or the Contract Drawings and (2) a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall prevail.
 - (c) In the event a warranty requirement set forth in the Specifications and/or the Contract Drawings is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor’s obligation to provide the manufacturer’s warranty, as set forth in the Specifications and/or the Contract Drawings, shall remain in full force and effect.
 - (d) In the event a warranty requirement for a particular item of material or equipment is omitted from Schedule B, as well as from the Specifications or the Contract Drawings, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (11) Exculpatory Provisions: In the event the Specifications and/or the Contract Drawings contain any provision whereby the consultant and/or any of its officers, employees or agents, including subconsultants, is absolved of responsibility for any act or omission, such provision is deemed deleted.
- (12) Insurance: Provisions regarding insurance coverage the Contractor is required to provide are set forth in Article 22 of the City of New York Standard Construction Contract and Schedule A, which is included in the Addendum to the General Conditions. In the event the Specifications and/or the Contract Drawings contain any provision regarding insurance requirements, such provision is deemed deleted.
- (13) Indemnification: Provisions regarding indemnification are set forth in Articles 7, 12, 22 and 57 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding indemnification, such provision is deemed deleted.
- (14) Dispute Resolution: Provisions regarding dispute resolution are set forth in Article 27 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding dispute resolution, such provision is deemed deleted.
- (15) Payment to Other Entities: In the event the Specifications and/or the Contract Drawings contain any provision which requires the Contractor to make payments to an entity other than a subcontractor and/or supplier providing services and/or material for the project, such provision is deemed deleted.
- (16) General Conditions: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the General Conditions, the General Conditions shall prevail.
- (17) Standard Construction Contract: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the City of New York Standard Construction Contract, the City of New York Standard Construction Contract shall prevail.

(18) Shall: Wherever the word “shall” is used in the Specifications and/or the Contract Drawings with respect to the Contractor’s or Subcontractor’s responsibilities or Project Requirements, the term is intended to convey a contractual mandate, such as the terms “must,” “will,” or “be obliged to” (and not “may”).

SCHEDULE A (FOR PUBLICLY BID PROJECTS)
PART I - Contract Requirements

Various Articles of the Contract refer to requirements which are set forth in Schedule A of the General Conditions. The Schedule set forth below specifies the following: (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the contract.

REFERENCE	ITEM	REQUIREMENTS	CONTRACT #1
Information For Bidders	Bid Security	The Contractor must obtain a bid security in the amount indicated to the right.	Required provided the TOTAL BID PRICE set forth on the Bid Form is \$1,000,000. or more. Certified Check: 2% of Bid Amount or Bond: 10% of Bid Amount
Information For Bidders	Performance and Payment Bonds		For Contracts in the amount of \$1,000,000.00 or more, Performance and Payment Bonds must each be in amount equal to 100% of the Contract Price.
Information For Bidders	Department of Design and Construction Safety Requirements	The Contractor must provide the safety personnel as indicated to the right	<input checked="" type="checkbox"/> Project Safety Representative <input type="checkbox"/> Dedicated, full-time Project Safety Representative
Article 14 Contract	Time of Substantial Completion	Consecutive Calendar Days	540 ccd
Article 15 Contract	Liquidated Damages	For each consecutive calendar day over completion time	\$600
Article 17 Contract	Sub-Contracts	Not to exceed Percent of Contract Price	60%
Article 21 Contract	Retainage	Percent of Voucher	If 100% bonds are required 5% If 100% bonds are not required, and Contract Price is \$1,000,000 or less 5% If 100% bonds are not required, and Contract Price is more than \$1,000,000 10%
Article 24 Contract	Deposit Guarantee	Percent of Contract Price	1%
Article 24 Contract	Period of Guarantee		See Schedule B of the Addendum to the General Conditions
Article 75 Contract	Compensation to be Paid to Contractor		Amount for which the Contract was Awarded: _____ Dollars (\$ _____)
Article 79 Contract	MWBE Program		See M/WBE Utilization Plan in the PASSPort Procurement M/WBE Considerations Section.

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Note: All certificate(s) of insurance submitted pursuant to Contract Article 22.3. 3 must be accompanied by a Certification by Broker consistent with Part III below and include the following information:

- For each insurance policy, the name and NAIC number of issuing company, number of policy, and effective dates;
- Policy limits consistent with the requirements listed below;
- Additional insureds or loss payees consistent with the requirements listed below; and
- The number assigned to the Contract by the City (in the "Description of Operations" field).

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<p>■ Commercial General Liability Art. 22.1.1</p>	<p>This Contract requires Commercial General Liability Insurance (CGL) that is at least as broad as ISO Form CG 00 01 (see Section 22.1.1 of the New York City Standard Construction Contract).</p> <p>The minimum limits shall be <u>\$1,000,000.00</u> per occurrence and <u>\$2,000,000.00</u> per project aggregate applicable to this Contract unless the Work requires a permit from the Department of Buildings and greater limits of Commercial General Liability Insurances are required pursuant to 1 RCNY section 101-08.</p> <p>Additional Insureds:</p> <ol style="list-style-type: none"> 1. City of New York, including its officials and employees, with coverage at least as broad as ISO Forms CG 20 10 and CG 20 37, and 2. All person(s) or organization(s), if any, that Article 22.1.1(b) of the Contract requires to be named as Additional Insured(s), with coverage at least as broad as ISO Form CG 20 26. The Additional Insured endorsement shall either specify the entity's name, if known, or the entity's title (e.g., Project Manager). 3. _____

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<ul style="list-style-type: none"> ■ Workers' Compensation Art. 22.1.2 ■ Disability Benefits Insurance Art. 22.1.2 ■ Employers' Liability Art. 22.1.2 <input type="checkbox"/> Jones Act Art. 22.1.3 <input type="checkbox"/> U.S. Longshoremen's and Harbor Workers Compensation Act Art. 22.1.3 	<p>Workers' Compensation, Employers' Liability, and Disability Benefits Insurance: Statutory per New York State law without regard to jurisdiction.</p> <p>Note: The following forms are acceptable: (1) New York State Workers' Compensation Board Form No. C-105.2, (2) State Insurance Fund Form No. U-26.3, (3) New York State Workers' Compensation Board Form No. DB-120.1 and (3) Request for WC/DB Exemption Form No. CE-200. The City will not accept an ACORD form as proof of Workers' Compensation or Disability Insurance.</p> <p>Jones Act and U.S. Longshoremen's and Harbor Workers' Compensation Act: Statutory per U.S. law.</p>
<ul style="list-style-type: none"> ■ Builders' Risk Art. 22.1.4 	<p>100 % of total value of Work</p> <p>Contractor the Named Insured; the City both an Additional Insured and one of the loss payees as its interests may appear.</p> <p>If the Work does not involve construction of a new building or gut renovation work, the Contractor may provide an installation floater in lieu of Builders Risk insurance.</p> <p>Note: Builders Risk Insurance may terminate upon Substantial Completion of the Work in its entirety.</p>
<ul style="list-style-type: none"> ■ Commercial Auto Liability Art. 22.1.5 	<p>\$1,000,000.00 per accident combined single limit</p> <p>If vehicles are used for transporting hazardous materials, the Contractor shall provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<input type="checkbox"/> Contractor's Pollution Liability Art. 22.1.6	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Protection and Indemnity Art. 22.1.7(a)	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Hull and Machinery Insurance Art. 22.1.7(b)	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Pollution Liability Art. 22.1.7(c)	\$ _____ each occurrence Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER] Art. 22.1.8 <input type="checkbox"/> Ship Repairers Legal Liability	\$ _____ each occurrence

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Collision Liability/Towers Liability</p>	<p>\$ _____ per occurrence</p> <p>\$ _____ aggregate</p> <p>Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____</p>
<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Railroad Protective Liability _____</p>	<p>\$ _____ per occurrence</p> <p>\$ _____ aggregate</p> <p>Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____</p>
<p>[OTHER] Art. 22.1.8</p> <p>■ Asbestos Liability _____</p>	<p>Only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>\$1,000,000 each occurrence, \$2,000,000 aggregate (Combined Single Limit); only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>Additional Insureds: 1. City of New York, including its officials and employees</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Boiler Insurance _____</p>	<p>\$200,000</p>
<p>[OTHER] Art. 22.1.8</p> <p>■ Professional Liability</p> <p>In the event any section of the Specifications requires the Contractor to engage a Professional Engineer to provide design and/or engineering services, the Engineer engaged by the Contractor, as well as any sub consultant(s) performing professional services, shall provide Professional Liability Insurance.</p>	<p>\$1,000,000 per occurrence</p> <p>The Contractor's Professional Engineer shall maintain and submit evidence of Professional Liability Insurance in the minimum amount of \$1,000,000 per claim. The policy or policies shall include an endorsement to cover the liability assumed by the Contractor under this Agreement arising out of the negligent performance of professional services or caused by an error, omission or negligent act of the Contractor's Professional Engineer or anyone employed by the Contractor's Professional Engineer.</p> <p>Claims-made policies will be accepted for Professional Liability Insurance. All such policies shall have an extended reporting period option or automatic coverage of not less than two (2) years. If available as an option, the Contractor's Professional Engineer shall purchase extended reporting period coverage effective on cancellation or termination of such insurance unless a new policy is secured with a retroactive date, including at least the last policy year.</p>
<p>OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Umbrella/Excess Liability Insurance</p> <p>The Contractor shall provide Umbrella/Excess Liability Insurance in the minimum amounts shown to the right. The policy terms and condition should be at least as broad as the underlying policies. The underlying policies should comply with the insurance provision as outlined by the contract. Defense cost should be in addition to the limit of liability. The City of New York, including its officials and employees, should be included as additional insured as respects to the noted project.</p>	<p>\$10,000,000 per Occurrence and \$10,000,000 in Aggregate</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART III. Certificates of Insurance

All certificates of insurance (except certificates of insurance solely evidencing Workers' Compensation Insurance, Employer's Liability Insurance, and/or Disability Benefits Insurance) must be accompanied by one of the following:

- (1) the Certification by Insurance Broker or Agent on the following page setting forth the required information and signatures;

-- OR --

- (2) copies of all policies as certified by an authorized representative of the issuing insurance carrier that are referenced in such certificate of insurance. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART IV. Address of Commissioner

Wherever reference is made in Article 7 or Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents must be sent via email to insurance@ddc.nyc.gov. Hard copies of such documents will no longer be required or accepted.

SCHEDULE B

Guarantees and Warranties

(Reference: Section 01 7839, Article 2.7 of the DDC Standard General Conditions)

GUARANTY FROM CONTRACTOR

(1) Contractor’s Guaranty Obligation: The Contractor shall promptly repair, replace, restore or rebuild, as the Commissioner may determine, any finished Work in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of Substantial Completion (or use and occupancy in accordance with the Contract), except for the areas of Work set forth below:

- Roofing, Waterproofing, and Joint Sealant Work. For these types of work, the guarantee period shall be (2) two years.
- Trees and/or Plant Material. For trees and/or plant material furnished and installed, the guarantee period shall be (2) two years. During the guarantee period, the Contractor shall provide all maintenance services set forth in the Specifications.

(2) Guaranty Period: The obligation of the Contractor, and its Surety under the Performance Bond, is limited to the period(s) of time specified above.

(3) Other Provisions Deemed Deleted: In the event the Specifications and/or the Contract Drawings contain any provisions regarding guaranty requirements, such provisions are deemed deleted and replaced with the guaranty requirements set forth in this Schedule B.

WARRANTY FROM MANUFACTURER

(1) Contractor’s Obligation to Provide Warranties: The items of material and/or equipment for which manufacturer warranties are required are listed below. For each item of material and/or equipment listed below, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth below and will be replaced or repaired within such specified period. The Contractor shall deliver all required warranties to the Commissioner.

(2) Required Warranties:

Specification Number	Material or Equipment	Warranty Period
Section 06 61 16	Solid Surfacing Fabrications	10 years
Section 07 92 00	Joint Sealants	10 years
Section 08 81 26	Interior Glass Glazing	5 years
Section 26 51 19	LED Interior Lighting	1 year
Section 28 46 13	Fire-Alarm Systems	5 years

(3) Application: The obligations under the warranty for the periods specified above shall apply only to the manufacturer of the material or equipment, and not to the Contractor or its Surety; provided, however, the Contractor retains responsibility for obtaining all required warranties from the manufacturers and delivering the same to the Commissioner.

(4) Other Provisions: The warranty requirements set forth in this Schedule B are also included in the Specifications.

- (a) In the event of any conflict between a warranty requirement set forth in the Specifications and a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall take precedence.
- (b) In the event a warranty requirement set forth in the Specifications is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications, shall remain in full force and effect.
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from both Schedule B and the Specifications, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (d) In the event a warranty requirement is provided for a particular item of material or equipment, and such requirement specifies a warranty period that is longer than that which is actually provided by any of the specified manufacturers, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by any of the specified manufacturers, unless otherwise directed in writing by the Commissioner.
- (e) Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.

SCHEDULE C

Contract Drawings

(Reference: Section 01 1000, Article 1.5 (A) of the DDC Standard General Conditions)

The Schedule set forth below lists all Contract Drawings for the Project.

Architectural

- T-001 Title Sheet
- EN-001 Energy Analysis Compliance Sheet
- A-001 General Notes
- A-002 ADA Diagrams and Notes
- A-003 Abbreviations and Legends
- A-004 Schedules
- A-005 Door Schedule and Types
- A-006 Typical Wall Types
- A-020 2nd Floor Public Restrooms Key Plan
- A-021 2nd Floor Men's Public Restroom Plans
- A-022 2nd Floor Men's Public Restroom Elevations
- A-023 2nd Floor Women's Public Restroom Plans
- A-024 2nd Floor Women's Public Restroom Elevations
- A-040 4th Floor Public Restrooms Key Plan
- A-041 4th Floor Men's Public Restroom Plans
- A-042 4th Floor Men's Public Restroom Elevations
- A-043 4th Floor Women's Public Restroom Plans
- A-044 4th Floor Women's Public Restroom Elevations
- A-100 4th Floor Public Restrooms Key Plan
- A-101 4th Floor Men's & Women's Public Restroom Plans
- A-102 4th Floor Men's Public Restroom Elevations
- A-103 4th Floor Women's Public Restroom Elevations
- A-110 11th Floor Public Restrooms Key Plan
- A-111 11th Floor Men's Public Restroom Plans
- A-112 11th Floor Men's Public Restroom Elevations
- A-113 11th Floor Women's Public Restroom Plans
- A-114 11th Floor Women's Public Restroom Elevations
- A-130 13th Floor Public Restrooms Key Plan
- A-131 13th Floor Women's Public Restroom Plans
- A-132 13th Floor Women's Public Restroom Elevations
- A-133 13th Floor Men's Public Restroom Plans
- A-134 13th Floor Men's Public Restroom Elevations
- A-150 15th Floor Public Restrooms Key Plan
- A-151 15th Floor Men's Public Restroom Plans
- A-152 15th Floor Men's Public Restroom Elevations
- A-153 15th Floor Women's Public Restroom Plans
- A-154 15th Floor Women's Public Restroom Elevations
- A-160 16th Floor Public Restrooms Key Plan
- A-161 16th Floor Women's Public Restroom Plans
- A-162 16th Floor Women's Public Restroom Elevations
- A-163 16th Floor Men's Public Restroom Plans
- A-164 16th Floor Men's Public Restroom Elevations
- A-030 3rd Floor Holding Pen Key Plan
- A-031 3rd Floor Holding Pen Plans
- A-032 3rd Floor Holding Pen Elevations
- A-120 12th Floor Holding Pen Key Plan
- A-121 12th Floor Holding Pen Plans

A-122 12th Floor Holding Pen Elevations
A-123 12th Floor Holding Pen Plans
A-124 12th Floor Holding Pen Elevations
A-500 Details - Sections
A-501 Details – Hallway
A-502 Details – Bathroom
A-503 Details – Sink
A-550 Details – Holding Pen
A-551 Details – Holding Pen
A-550 Details

Electrical

E-001 Electrical Symbol List, General Notes, Drawing List & Abbreviations
E-002 Electrical Key Plans No. 1
E-003 Electrical Key Plans No. 2
E-021 Electrical 2nd Floor Plan
E-041 Electrical 4th Floor Plan
E-101 Electrical 10th Floor Plan
E-111 Electrical 11th Floor Plan
E-131 Electrical 13th Floor Plan
E-151 Electrical 15th Floor Plan
E-161 Electrical 16th Floor Plan
E-031 Electrical 3rd Floor Holding Cell Floor Plan
E-121 Electrical 12th Floor Holding Cell Floor Plan
E-300 Electrical Power Riser Diagram
E-500 Electrical Details No. 1

Mechanical Energy Compliance

EN-100 Mechanical Energy Compliance Drawings

Electrical Energy Compliance

EN-200 Electrical Energy Compliance Drawings

Fire Alarm

FA-001 Fire Alarm General Notes, Symbol List, Drawing List
FA-100 Fire Alarm – 2nd, 4th, 10th, & 11th Floor Plan
FA-101 Fire Alarm – 13th, 15th, & 16th Floor Plan

Mechanical

M-001 Mechanical Symbols, Drawing Lists, Notes and Abbreviations
M-002 Mechanical Keyplan No.1
M-003 Mechanical Keyplan No.2 and Occupancy Protection Plan
M-020 Mechanical Part Plan 2nd Floor Men's Bathroom
M-021 Mechanical Part Plan 2nd Floor Women's Bathroom
M-031 Mechanical 3rd Floor Plan
M-041 Mechanical Part Plan 4th Floor Women's Bathroom
M-042 Mechanical Part Plan 4th Floor Men's Bathroom
M-101 Mechanical Part Plan 10th Floor Men's Bathroom
M-102 Mechanical Part Plan 10th Floor Women's Bathroom
M-111 Mechanical Part Plan 11th Floor Women's Bathroom
M-112 Mechanical Part Plan 12th Floor Men's Bathroom
M-130 Mechanical Part Plan 13th Floor Women's Bathroom
M-132 Mechanical Part Plan 13th Floor Men's Bathroom
M-151 Mechanical Part Plan 15th Floor Men's & Women's Bathroom

M-161 Mechanical Part Plan 16th Floor Women's Bathroom
M-162 Mechanical Part Plan 16th Floor Men's Bathroom

Plumbing

P-001 Plumbing Symbol List, General Notes, Drawing List & Abbreviations
P-002 Plumbing Key Plan No. 1
P-003 Plumbing Key Plan No. 2
P-021 Plumbing 2nd Floor Plan
P-031 Plumbing 3rd Floor Holding Cell Part Plan
P-041 Plumbing 4th Floor Plan
P-101 Plumbing 10th Floor Plan
P-111 Plumbing 11th Floor Plan
P-131 Plumbing 13th Floor Plan
P-151 Plumbing 15th Floor Plan
P-161 Plumbing 16th Floor Plan
P-121 Plumbing 12th Floor Holding Cell Part Plan
P-300 Plumbing Sanitary Riser Diagrams
P-301 Plumbing Sanitary Riser Diagrams
P-302 Plumbing Domestic Water Riser Diagrams
P-303 Plumbing Domestic Water Riser Diagrams
P-500 Plumbing Details

Asbestos Abatement

H001 Asbestos Abatement – General Notes
H002 Asbestos Abatement – Second Floor Plan
H003 Asbestos Abatement – Fourth Floor Plan
H004 Asbestos Abatement – Tenth Floor Plan
H005 Asbestos Abatement – Eleventh Floor Plan
H006 Asbestos Abatement – Thirteenth Floor Plan
H007 Asbestos Abatement – Fifteenth Floor Plan
H008 Asbestos Abatement – Sixteenth Floor Plan

SCHEDULE E
Separation of Trades

NOT USED FOR SINGLE CONTRACTS



TABLE OF CONTENTS

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

DIVISION 2 - EXISTING CONDITIONS

- 02 41 19 Selective Demolition
- 02 80 13 General Contractor Work Allowance for Incidental Asbestos Abatement
- 02 82 13 Asbestos Abatement

DIVISION 4 - MASONRY

- 04 20 00 Unit Masonry

DIVISION 5 - METALS

- 05 50 00 Metal Fabrications
- 05 70 00 Decorative Metals

DIVISION 6 - WOOD, PLASTICS AND COMPOSITES

- 06 10 00 Rough Carpentry
- 06 61 16 Solid Surfacing Fabrications

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

- 07 84 00 Firestopping
- 07 92 00 Joint Sealants

DIVISION 8 - OPENINGS

- 08 11 13 Hollow Metal Doors and Frames
- 08 34 53 Security Doors and Frames
- 08 31 13 Access Doors and Frames
- 08 71 00 Finish Hardware
- 08 81 26 Interior Glass Glazing

DIVISION 9 – FINISHES

- 09 21 16 Gypsum Board Assemblies
- 09 30 00 Tiling
- 09 57 53 Security Ceiling Assemblies
- 09 66 23 Resinous Matrix Terrazzo Flooring
- 09 90 00 Painting and Coating

DIVISION 10 – SPECIALTIES

- 10 21 13 Toilet Compartments



10 28 13 Toilet Accessories

DIVISION 22 - PLUMBING

22 05 13 Common Motor Requirements for Plumbing Equipment
22 05 16 Expansion Fittings and Loops for Plumbing Piping
22 05 17 Sleeves and Sleeve Seals for Plumbing Piping
22 05 18 Escutcheons for Plumbing Piping
22 05 23 General-Duty Valves for Plumbing Piping
22 05 29 Hangers and Supports for Plumbing Piping and Equipment
22 05 53 Identification for Plumbing Piping and Equipment
22 07 19 Plumbing Piping Insulation
22 11 16 Domestic Water Piping
22 11 19 Domestic Water Piping Specialties
22 13 16 Sanitary Waste and Vent Piping
22 42 13.13 Commercial Water Closets
22 42 13.16 Commercial Urinals
22 42 16.13 Commercial Lavatories
22 42 16.16 Commercial Sinks
22 47 13 Drinking Fountains

DIVISION 23 - HEATING, VENTILATING AND AIR CONDITIONING (HVAC)

23 05 00 Common Work Results for HVAC
23 05 93 Testing, Adjusting, and Balancing for HVAC
23 31 13 Metal Ducts
23 33 10 Dampers
23 37 13 Diffusers, Registers, and Grilles

DIVISION 26 - ELECTRICAL

26 05 10 Basic Electrical Materials and Methods
26 05 19 Low-Voltage Electrical Power Conductors and Cables
26 05 26 Grounding and Bonding for Electrical Systems
26 05 29 Hangers and Supports for Electrical Systems
26 05 33 Raceway and Boxes for Electrical Systems
26 05 44 Sleeves and Sleeve Seals for Electrical Raceways and Cabling
26 05 53 Identification for Electrical Systems
26 09 23 Lighting Control Devices
26 27 26 Wiring Devices
26 28 16 Enclosed Switches and Circuit Breakers
26 51 19 LED Interior Lighting

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

28 46 13 Fire-Alarm Systems

END OF TABLE OF CONTENTS

CONTRACT # 1
GENERAL CONSTRUCTION WORK

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 02 41 19 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
1. Alterations, selective demolition and removals as noted on drawings and as required to accommodate new construction.
 2. Removal of debris.
 3. Protection of existing building and spaces to remain and shoring of the structure as required for structural integrity and personal safety.
 4. Temporary coverage passageways.
 5. Patching and refinishing of existing surfaces damaged as a result of this work.
 6. Protection.

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Schedule of Demolition Operations: Submit demolition procedures and operational sequence for Commissioner's review prior to start of work. Submit a written request to Commissioner well in advance of executing any cutting or alteration which affects:
1. The work of tying in or connecting to operational systems of the building, including electrical, mechanical and security systems.
 2. The structural value or integrity of any element of the project or of adjacent structures.
 3. The integrity or effectiveness of weather-exposed and moisture-resistant elements or systems.
 4. The efficiency, operational life, maintenance, or safety of operational elements or systems.
- C. Shop Drawings: Submit the following prior to starting work:
1. Submit for Commissioner's information shop drawings indicating location and typical construction details of temporary dustproof and weatherproof partitions.
 2. Submit drawings of temporary structural shoring, bracing, framing or support, for the information of the Commissioner. Such drawings will be reviewed by the Commissioner for the effects of such temporary members on the structural elements to remain. Include the reason for such temporary members, the location, the direction and magnitude of design reaction forces on existing structure, and details showing how these reaction forces will be applied to the existing structure.
 - a. Submit shop drawings signed and sealed by the Contractor's Professional Engineer licensed in the State of New York.



- b. The Commissioner will receive acknowledgment for concepts shown. Such acknowledgments shall be of the concept only and not of actual capacities or structural design and shall not in any way diminish or limit the Contractor's responsibility for the quality and performance of the work and for protecting existing structures and facilities.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. The Contractor shall be responsible for any damage to any adjacent structures or buildings to remain.
- C. Qualifications: Qualifications of Contractor for work of this Section shall not be less than three (3) years of field experience.
- D. Professional Engineering: The Contractor shall retain the services of a Professional Engineer licensed in the State of New York to engineer and supervise installation of all underpinning and shoring.

1.5 JOB CONDITIONS

- A. Areas of building to be demolished or altered will be vacated and discontinued in use prior to the start of the work.
 - 1. Surrounding areas of the building must remain operational.
- B. Partial Removal
 - 1. Items of savable value to the Contractor may be removed from the structure as the work progresses. Salvaged items must be transported from the site as they are removed.
 - 2. Storage or sale of removed items on the site will not be permitted.
- C. Explosives: The use of explosives will not be permitted.
- D. Traffic: Do not close or obstruct streets, walks or other occupied or used facilities without permission from the Commissioner. Provide alternate routes around closed or obstructed traffic ways if required by the New York City Department of Transportation.
- E. Utilities
 - 1. Maintain any existing utilities required to remain; keep in service and protect against damage during demolition operations.
 - 2. Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by the Commissioner. Provide temporary services during interruptions to existing utilities, as acceptable to ConEdison and the Commissioner.
 - 3. Disconnect and seal any abandoned utilities before starting demolition operations. Coordinate all work with ConEdison.

1.6 SCHEDULING

- A. Before commencing any alteration or demolition work submit, for review and approval by the Commissioner, a schedule showing the commencement, the order, and the completion dates for the various parts of this work.



- B. Before starting any work relating to existing utilities (electrical, sewer, water, heat, gas, fire lines, etc.) that will temporarily discontinue or disrupt service to the structures to remain, notify the Commissioner 7 days in advance and obtain the Commissioner's approval in writing before proceeding with this phase of the work.

PART 2 - PRODUCTS

Refer to Part 3 - Execution, for Product Requirements

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PROTECTION

- A. Execute demolition work to ensure protection of existing portions of building to remain against damages which might occur from falling debris or other cause. Do not interfere with use of adjacent occupied buildings and areas. Maintain free, safe passage to and from adjacent occupied buildings.
- B. Materials Placement: Do not load structure with weight that will endanger, overload or cause excessive deflection of the existing structure, or that will damage finished surfaces adjacent to and/or supported by the existing structure, except portions being removed.
- C. Construction Operations: Do not employ any construction operation, equipment or vehicles that will endanger, overload or cause excessive deflection of the existing structure, or that will damage finished surfaces adjacent to and/or supported by the existing structure, except portions being removed.
- D. Take precautions to guard against movement, settlement, damage, or collapse of any part of building, sidewalks, adjacent property or street passages; be liable for any such movement, settlement or collapse.
- E. Provide the necessary safeguards to prevent accidents, to avoid all necessary hazards and protect the public, the work and property at all times, including Saturdays, Sundays, and holidays.
- F. Be responsible for any and all damages which may arise or occur to any party whatsoever by reason of the neglect in providing proper lights, guards, barriers, or any other safeguards to prevent damage to property, life and limb.
- G. Make such explorations and probes as are necessary to ascertain any required protective measures before proceeding with demolition and removal. Give particular attention to shoring and bracing requirements so as to prevent any damage to existing construction.
 - 1. Provide interior and exterior shoring, bracing, or support to prevent movement or settlement or collapse of structures to be demolished and adjacent facilities to remain. The Contractor's Professional Engineer licensed in the State of New York shall advise on bracing, shoring, underpinning, or other structural requirements. The Contractor shall bear all responsibility for prevention of movement or other structural fault.



2. The Contractor must restore, by repair or otherwise, the portions of structure or their contents altered by the Contractor in furtherance of underpinning and support operations. Restoration shall be completed to the conditions which existed prior to the start of the work. Restore any damage caused by inadequate support.
- H. Provide, erect and maintain catch platforms, lights, barriers, weather protection, warning signs, and other items as required for proper protection of the workers engaged in demolition and alteration operations, occupants of the building, public and adjacent property. Repair any damage caused by the Contractor's operations.
- I. Provide and maintain temporary protection of the existing structure designated to remain where demolition, removal, and new work are being done, connections made, materials handled, or equipment moved.
- J. Take necessary precautions to prevent dust and dirt from rising. Protect unaltered portions of the existing building affected by the operations under this Section by dustproof partitions and other adequate means.
- K. Do not close or obstruct walkways, passageways, or stairways. Do not store or place materials in passageways, stairs, or other means of egress. Conduct operations with minimum traffic interference.
- L. Be responsible for any damage to the existing structure or contents by reason of the insufficiency of protection provided.
- M. Promptly repair damages caused to adjacent facilities by demolition operations.
- N. Provide and maintain weather protection at exterior openings so as to fully protect the interior premises against damage from the elements until such openings are closed by new construction.

3.3 INSPECTION

- A. Verify that areas of demolition work are protected, and temporary dustproof partitions have been installed.
- B. Verify that construction to be removed is not load bearing or has been properly braced, framed or supported.
- C. Inspect existing conditions of the project, including elements subject to damage or to movement during demolition and cutting.
- D. After uncovering work, inspect the conditions affecting the installation or performance of the work.
 1. Report differing or questionable conditions to the Commissioner in writing; do not proceed with the work until the Commissioner has provided further direction.

3.4 PREPARATION

- A. Provide adequate temporary support as necessary to ensure the structural value or integrity of the affected portion of the work
- B. Provide devices and methods to protect and monitor other portions of the project from damage.



C. Pollution Controls

1. Use water sprinkling, temporary enclosures, and other suitable methods to limit the amount of dust and dirt rising and scattering in the air to the lowest practical level.
 - a. Do not use water when it may create hazardous or objectionable conditions such as ice, flooding, and pollution.
2. Clean adjacent structures and improvements of dust, dirt and debris caused by demolition operations. Return adjacent areas to condition existing prior to the start of the work.
3. Provide drainage for temporary water use.

3.5 DEMOLITION AND CUTTING

A. Selectively demolish existing construction in conformance with the drawings and these specifications.

1. Execute cutting and demolition by methods which will prevent damage to other work and will provide proper surface to receive installation of work and patching of finish surfaces.
2. Do all cutting or removal so as to leave neat, true, plumb and square edges, at edges to remain. Use carborundum or diamond saw equipment for cutting masonry, concrete and stone work, where edges or surfaces are to remain.
3. Do not cut or remove construction which might weaken or impair the structural integrity or strength of the structural framing or support systems which are to remain.
4. Demolish and remove materials as shown on the drawings without damage to the remaining parts of the structure or mechanical/electrical/utility systems.
5. Remove materials so as to not impose excessive loads in supporting walls, floors or framing and so as not to damage remaining undemolished portions of the structure.
6. Where portions of structures are to be removed, remaining portions must be protected from damage and prepared to fit new construction. Damage to portions of structures to remain must be repaired.
7. Reinforcing steel in existing structures must be left in place, cleaned and aligned to provide tie with new work.
8. Existing waterproofing systems and flashings must be carefully exposed and protected to maintain workable conditions of fitting new work with existing construction.
9. Proceed with demolition in a systematic manner.
10. Demolish concrete and masonry in small sections.

B. Shoring

1. Design, provide, erect and maintain necessary temporary shoring, bracing, framing, or support where load bearing structural or supporting members are removed or weakened by cuts or openings or are subject to damage from demolition operations, and otherwise as required for safety or to protect finish surfaces from damage.
2. Construction and adequacy of the shoring shall be the responsibility of the Contractor. Any damage caused by the inadequacy of the shoring or other support shall be the responsibility of the Contractor to remedy at no additional expense to the City of New York.
3. Shoring and bracing shall remain until new structural framing and/or supports are installed. Coordinate operations fully with other trades.
4. Be ready at any time to promptly provide, add to, or strengthen temporary shoring, bracing, or support for existing work, in case existing construction begins to show signs of structural stress.



3.6 WORKMANSHIP STANDARDS FOR ALTERATION AND REMOVAL WORK

- A. Cut, remove, alter, temporarily remove and replace, or relocate existing work as required for performance of the work. Perform such work required with due care, including shoring and bracing.
- B. Coordinate patching involving the various trades whether or not specifically mentioned in the respective specification Sections.
- C. Materials or items demolished and not designated to become the property of the City of New York or to be reinstalled shall become the property of the Contractor and shall be removed from the site.
- D. Execute the work in a careful and orderly manner, with the least possible disturbance to the public and to the occupants of the adjacent buildings.
- E. In general, demolish masonry in small sections. Where necessary to prevent collapse of any construction, install temporary shores, struts, or bracing.
- F. Put materials to be removed by existing elevators in enclosed containers.
- G. Where existing equipment and/or fixtures are indicated to be reused, repair such equipment and/or fixtures and refinish to put in perfect working order. Refinish as directed.
- H. Cut out embedded anchorage and attachment items as required to properly provide for patching and repair of the respective finishes.
- I. Where utilities are removed, relocated or abandoned, cap, valve, plug, or by-pass to make complete and working installation.
- J. Restore existing pipe and duct coverings damaged by work under this Contract to original undamaged condition.
- K. Immediately restore to service and repair any damage caused by Contractor's workers to existing pipe and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems which are not scheduled for discontinuance or abandonment.
- L. Upon completion of contract, deliver work complete. Damage that may be caused by Contractor or Contractor's workers to existing structures designated to remain, grounds, and utilities must be restored by Contractor and left in as good condition as existed prior to damaging.
- M. Restore finish work of floors, walls, and ceilings remaining in place but damaged or defaced because of demolition or alteration work to condition equal that which existed at beginning of work.
- N. Where alteration or removals expose damaged or unfinished surfaces or materials, refinish such surfaces or materials, or remove them and provide new or salvaged materials to make continuous surfaces uniform.
- O. Perform new work and restore and refinish existing work in conformance with applicable requirements of the specifications, except as follows:
 - 1. Materials for use in repair of existing surfaces, but not otherwise specified, shall conform to the highest standards of the trade involved, and be in accordance with approved industry standards, and shall be as required to match existing surfaces.



2. Workmanship for repair of existing materials shall, unless otherwise specified, be equal to similar workmanship existing in or adjacent to the space where the work is being done.
 3. Installation of salvaged items where no similar items exist shall be done in accordance with the highest standards of the trade involved and in accordance with approved shop drawings.
- P. Materials or items designated to become the property of the City of New York are shown on the drawings. Remove such items with care and store them in a location at the site to be designated by the Commissioner.
- Q. Materials or items designated to be reinstalled are shown on the drawings. Remove such items with care under the supervision of the trade responsible for reinstallation; protect and store until required. Replace materials or items damaged in their removal with similar new material.
- R. The existing building shall not be used as a work shop. Neither shall the furnishings or equipment in any room be used as work benches. Should any damage occur during the progress of the work to any furniture, fixtures, equipment, or appurtenances therein, such damage shall be repaired, replaced or made good by the Contractor.
- S. Where removing existing floor finish and base, remove all adhesive and leave floors and walls smooth and flush, ready to receive new finish.
- T. Finish new and adjacent existing surfaces as specified for new work. Clean existing surfaces of dirt, grease and loose paint before refinishing.

END OF SECTION 02 41 19



THIS PAGE INTENTIONALLY LEFT BLANK



**SECTION 02 80 13 – GENERAL CONTRACTOR WORK
NOVEMBER 2017 VERSION**

ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

1.01 SCOPE FOR ASBESTOS ABATEMENT WORK

- A. The "General Conditions" apply to the work of this Section.
- B. The asbestos abatement contractor shall remove asbestos containing materials as needed to perform the other work of this Contract when discovered during the course of work. When required, the asbestos abatement contractor shall replace the ACM with non-asbestos containing materials. An allowance of **\$15,000.00** for the **General Contractor** is herein established for this incidental work when so ordered and authorized by the Commissioner.
- C. All work shall be done in accordance with the applicable provisions of the rules and regulations of the asbestos control program as promulgated by Title 15 Chapter I of RCNY and New York State Department of Labor Industrial Code Rule 56 cited as 12 NYCRR Part 56, whichever is more stringent as per latest amendments to these laws and as modified herein by these specifications.
- D. All disposal of asbestos contaminated material shall be per Local Law 70/85.
- E. The asbestos abatement contractor's attention is directed to the fact that certain methods of asbestos abatement are protected by patents. To date, patents have been issued with respect to "negative pressure enclosure" or "negative-air" or "reduced pressure" and "glove bag".
- F. The asbestos abatement contractor shall be solely responsible for and shall hold the Department of Design and Construction and the City harmless from any and all damages, losses and expenses resulting from any infringement by the asbestos abatement contractor of any patent, including but not limited to the patents described above, used by the asbestos abatement contractor during performance of this agreement.
- G. "Asbestos" shall mean any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite (cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthrophyllite and actinolite.
- H. Prior to starting, the asbestos abatement contractor must notify the Commissioner of the Department of Design and Construction if he/she anticipates any difficulty in performing the Work as required by these Specifications. The asbestos



abatement contractor is responsible to prepare and submit all filings, notifications, etc. required by all City, State and Federal regulatory agencies having jurisdiction.

The asbestos abatement contractor is responsible for submitting the Asbestos Project Notification Form (ACP-7 Form) to the Department of Environmental Protection, Asbestos Control Program, as per Title 15, Chapter I of RCNY and to the NYSDOL as per Industrial Code Rule 56.

The asbestos abatement contractor is responsible for preparing, and submitting Asbestos Variance Application (ACP-9). If a Variance is required, the asbestos abatement contractor is responsible to retain a NYSDOL Asbestos Project Designer, as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required variance.

The general contractor is responsible for preparing and submitting an Asbestos Abatement Permit and/or Work Place Safety Plans (WPSP) that may be required for the completion of the Contract or incidental work. If such plans are required, the general contractor is responsible for retaining a registered design professional as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required plans.

The asbestos abatement contractor is responsible for the submission of all required documents to the NYCDEP to acquire the appropriate Asbestos Project Conditional Closeout (ACP-20) and/or Asbestos Project Completion Forms (ACP-21) on a timely basis for the completion of the incidental work encountered under this contract.

The asbestos abatement contractor will be required to attend an on-site job meeting with the Construction Project Manager prior to the start of work to examine conditions and plan the sequence of operations, etc.

The asbestos abatement contractor shall have a NYSDOL/NYCDEP Asbestos Supervisor onsite to oversee the work and conduct a final visual inspection as required by both Title 15, Chapter 1 of the RCNY and NYSDOL Industrial Code Rule 56.

- I. All work shall be done during regular working hours unless the asbestos abatement contractor requests authorization to work in other than regular working hours and such authorization is granted by the Commissioner. (Regular work hours are those hours during which any given facility, in which work is to be done, is customarily open and functioning, normally between the hours of 8:00 A.M. and 4:00 P.M. Monday - Friday.) If such work schedule is authorized by the Commissioner, the work shall be done at no additional cost to the City.
- J. The Commissioner may order that work be done in other than regular working hours as herein by defined and this order may require the asbestos abatement



contractor to pay premium or overtime wages to complete the work. If the Commissioner orders work in other than regular working hours, the asbestos abatement contractor shall multiply the unit price for that portion of the work requiring premium wages by 1.50 when computing payment in accordance with Paragraph 1.09. All requests for premium payment must be supported by certified payroll sheets and field sheets approved by the Construction Project Manager.

1.02 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must be approved through the Department's Request for Subcontractor Approval, administered by the Agency Chief Contracting Office (ACCO), Vendor Integrity Unit. The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (6) below. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, demonstrate for the three year period prior to the work that it has been licensed by the New York State Department of Labor (NYSDOL), as an "Asbestos Abatement Contractor". The asbestos abatement contractor shall submit copies of the asbestos abatement contractors NYSDOL License for the past three years
 2. The asbestos abatement contractor must, for the three-year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 3. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must submit a list of five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$1,000,000 in each of the three years.
 4. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following information for the project; name and location of the project; name title and telephone number and email address of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work; brief description of the scope of work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.
 5. The asbestos abatement contractor must demonstrate that it has the financial resources, certified supervisory personnel and equipment



necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract. The Department may also conduct an inspection of the asbestos abatement contractor's facility to verify if the contractor has equipment and staffing to perform the work.

6. The asbestos abatement contractor must submit a copy of their Corporate Health and Safety Plan for review and acceptance. A Job Hazard Analysis (JHA) for the specific work conducted must be included.
- B. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof. Provide materials or workmanship that meet or exceed the specifically named codes or standards where required by these specifications.
- C. Site Investigation: Asbestos abatement contractor shall inspect all the specifications and related drawings, and will investigate and confirm the site conditions affecting the work, including, but not limited to (1) through (5) below. The asbestos abatement contractor will attend a walkthrough site inspection with the department's Project Manager and the Third-Party Air Monitor prior to the work. Such walkthrough will be scheduled at the Department's convenience.
1. Physical considerations and conditions of both the material and structure. These considerations include any obstacles or obstructions encountered in accessing or removing the material.
 2. Handling, storage, transportation and disposal of the material.
 3. Availability of qualified and skilled labor.
 4. Availability of utilities.
 5. Exact quantities of all materials to be disturbed and/or removed

1.03 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

The asbestos abatement contractor will visit the subject location within one (1) working day of notification to ascertain actual work required. If the project is identified as being "urgent", then work shall commence no later than 48 hours from the time of notification. In this event, the asbestos abatement contractor shall immediately notify when applicable EPA NESHAPS Coordinator, NYSDOL Asbestos Control Bureau and NYCDEP



Asbestos Control Program of start of the work and file the necessary Asbestos Notifications and any applicable Variance Applications with the regulatory agencies cited above.

In the event that the project is not classified as "urgent" the asbestos abatement contractor shall notify the EPA NESHAPS Coordinator, NYSDOL and NYCDEP by submitting the requisite asbestos project notification forms, postmarked 10 days before activity begins if 260 linear feet or more and/or 160 square feet or more of asbestos containing material will be disturbed.

The following information must be included in the notification:

- A. Name and address of building City or operator;
- B. Project description:
 - 1. Size - square feet, number of linear feet, etc;
 - 2. Age - date of construction and renovations (if known);
 - 3. Use - i.e., office, school, industrial, etc.
 - 4. Scope - repair, demolition, cleaning, etc.
- C. Amount of asbestos involved in work and an explanation of techniques used to determine the amount;
- D. Building location/address, including Block and Lot numbers;
- E. Work schedule including the starting and completion dates;
- F. Abatement methods to be employed;
- G. Procedures for removal of asbestos-containing material;
- H. Name, title and authority of governmental representative sponsoring project.

1.04 WORK INCLUDED IN UNIT PRICE

The asbestos abatement contractor will be paid a basic unit price of **\$25.00** per square feet for the removal and disposal of asbestos containing material and replacement of the same with non-asbestos containing materials.

Unit price shall include all costs necessary to do the work of this Contract, including but not limited to: labor, materials, equipment, utilities, disposal, insurance, overhead and profit.



1.05 AIR MONITORING – ASBESTOS ABATEMENT CONTRACTOR

- A. “Air Sampling” shall mean the process of measuring the fiber content of a known volume of air collected during a specific period of time. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400 or the provisional transmission electron microscopy methods developed by the USEPA and/or National Institute of Standard and Technology which are utilized for lower detectability and specific fiber identification.
- B. Air monitoring of asbestos abatement contractor’s personnel will be performed in conformance with OSHA requirements, (All costs associated with this work are deemed included in the unit price.).
- C. Qualifications of Testing Laboratory:

The industrial hygiene laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory identification number shall be submitted and approved by the City. The laboratory shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).

Note: Work area air testing and analysis before, during and upon completion of work (clearance testing) will be performed by a Third Party Air Monitor under separate Contract with the City.

1.06 THIRD PARTY MONITORING AND LABORATORY

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM).
- C. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.
- D. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the asbestos abatement contractor.



1.07 PAYMENT REQUEST DOCUMENTATION

- B. The following information shall be included for each payment request:
1. Description of work performed.
 2. Linear footage and pipe sizes involved.
 3. Square footage for boiler & breaching insulation removed.
 4. Square footage of non pipe and boiler areas removed, patched, enclosed, sealed, or painted.
 5. Square footage of encapsulation, sealing, patching, and painting involved.
 6. Total cost associated with compliance with the assigned task.
 7. Architectural, Electrical, HVAC, Plumbing, etc. work incidental to the Asbestos Abatement Work.
 8. A certified copy (in form 4312-39) to the Comptroller or Financial Officer of the New York City to the effect that the financial statement is true.
 9. A signed copy (in form 6506q-6) of certificate of compliance with non-discriminatory provisions of the Contract.
 10. Attach a copy of valid workmen compensation insurance.
 11. Valid asbestos insurance per occurrence.
 12. General liability insurance when required.
- C. Each payment request shall include a grand total for all work completed that billing period, the landfill waste manifests and a copy of waste transporter permit. The Department of Design and Construction will inspect the work performed, review the cost and approve or disapprove requests for payment.
- D. EXPOSURE LOG: With this final payment, the asbestos abatement contractor shall submit a listing of the names and social security numbers of all employees actively engaged in the abatement work of this Contract. This list shall include a summary showing each part of the abatement work in which the employee was engaged and the dates thereof.

1.08 QUANTITY CALCULATIONS

In order to determine the square footage involved for the various pipe sizes of pipe insulation that might be encountered, the following table is to be used.



PIPE INSULATION SIZE O.D.	PIPE SIZE O.D.	SQUARE FOOTAGE PER LINEAR FOOT
2-1/2"	1/2"	0.65
2-3/4"	3/4"	0.72
3"	1"	0.79
3-1/4"	1-1/4"	0.85
3-1/2"	1-1/2"	0.92
4"	2"	1.05
4-1/2"	2-1/2"	1.18
5"	3"	1.31
6"	3-1/4"	1.57
7"	3-1/2"	1.83
8"	4"	2.09
9"	5"	2.36
10"	6"	2.62
12"	8"	3.14
14"	10"	3.67
16"	12"	4.19
18"	14"	4.71

1.09 METHOD OF PAYMENT

Payment shall be made in accordance with Items A through R below. Payment shall be calculated based on the actual quantity of the item performed by the asbestos abatement contractor, times the unit price specified below. Credits may apply to certain times, as specified below.

A. REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING PIPE INSULATION: Actual linear footage, multiplied by the square footage factor listed for the respective pipe size in Section 1.08, multiplied by the unit price in Section 1.04.

EXAMPLE: 100 lin.ft. of 1/2" pipe and 100 lin.ft. of 6" pipe, including elbows, tees. Flanges, etc.

$$100 \times 0.65 = 65 \text{ sq.ft.} \quad 65 \times \text{unit price} = \text{Payment}$$

$$100 \times 2.62 = 262 \text{ sq.ft.} \quad 262 \times \text{unit price} = \text{Payment}$$

B. REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER INSULATION: (all types including Silicate Block and including the removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.

EXAMPLE: Item B. removal and replacement of 1000 S.F. of boiler insulation (incl. Silicate block)

$$1000 \text{ S.F.} \times (1.5) \times \text{the Unit Price} = \text{Payment}$$



- C. **REMOVAL, DISPOSAL AND REPLACEMENT OF TANK INSULATION:** (all types including removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.
- D. **REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER UPTAKE, & BREACHING INSULATION:** (all types including stiffening angles and wire lath) Payment shall be made at 2.0 times the unit price per square foot.
- E. **REMOVAL, DISPOSAL AND REPLACEMENT OF DUCT INSULATION:** Payment shall be made at 1.0 times the unit price per square foot.
- F. **REMOVAL, DISPOSAL AND REPLACEMENT OF SOFT ASBESTOS CONTAINING MATERIAL:** (Including sprayed-on fire proofing and sound proofing) Payment shall be made at 1.0 times the unit price per square foot of surface area. Area of irregular surfaces must be calculated and confirmed with DDC representative.
- G. **ACOUSTIC PLASTER REPAIR AND/OR ENCAPSULATION:** Payment shall be made at 0.5 times the unit price per square foot.
- H. **PATCHING OR REPAIR** of items listed in A through F will be paid at 0.33 times the unit price per square foot.
- I. **REMOVAL, DISPOSAL AND REPLACEMENT OF WATERPROOFING ASBESTOS CONTAINING MATERIAL:** (including friable and non-friable waterproofing material from interior and exterior walls, floors, foundations, penetrations, louvers, vents and openings other than windows, doors and skylights) Payment shall be made at 0.5 times the unit price per square foot.
- J. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING ELECTRICAL WIRING INSULATION:** (including friable and non-friable wiring insulation) Payment shall be made at 0.33 times the unit price per square foot.
- K. **PAINTING:** Payment shall be made at 0.05 times the unit price per square foot.
- L. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING PLASTER:** from ceilings and walls, including any wire lath and disposal as asbestos containing waste. Payment shall be made at 0.80 times the unit price per square foot.
- M. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING FLOOR TILES, CEILING TILES, TRANSITE PANELS:** (including any adhesive, glue, mastic and/or underlayment) and disposal as asbestos containing waste. Payment shall be made at 0.40 times the unit price per square foot. If multiple layers are discovered, each additional layer shall be paid at 0.20 times the unit price per square foot.



- N. **ADDITIONAL CLEAN UP/HOUSEKEEPING OF WORK AREA:** (excluding pre-cleaning of work area required by regulations) HEPA vacuuming and wet cleaning of asbestos contaminated surface. Payment shall be made at 0.20 times the unit price per square foot. When GLOVE BAG is employed to remove ACM, cost of HEPA vacuuming and wet cleaning of floor area up to 3 feet on each side of glove-bag shall be included in unit price and no extra payment will be made.
- O. **REMOVAL, DISPOSAL OF ASBESTOS-CONTAINING ROOFING MATERIAL:** including mastic, flashing and sealant compound and provide temporary asbestos-free roof covering consisting of one layer of rolled roofing paper sealed with asphaltic roofing compound. Payment shall be made at 0.8 times the unit price per square foot. Credit at a rate of 0.33 times the unit price will be taken for each square foot of temporary roof covering which the asbestos abatement contractor is directed not to install.
- P. **PICK-UP AND DISPOSAL OF GROSS DEBRIS:** (excluding any waste generated from abatement under Item A-R) at a rate of \$150 per cubic yard for asbestos contaminated waste and \$75 per cubic yard for non-asbestos contaminated waste. This cost includes all labor and material cost associated with work.
- Q. **REMOVAL OF ASBESTOS-CONTAINING BRICK, BLOCK, MORTAR, CEMENT OR CONCRETE:** along with all surfacing materials including wire lath and/or other supporting structures and disposal as ACM waste. Payment shall be made at a rate of \$25.00 per cubic foot of material removed.
- R. **REMOVAL AND DISPOSAL OF ASBESTOS CONTAINING WINDOW/DOOR CAULKING:** including friable and non-friable caulking, weather-stripping, glazing, sealants or other waterproofing materials applied to windows, doors, skylights, etc. Payment shall be made at the rate of \$400.00 per opening regardless of size or configuration. This cost includes labor, consumable materials, set-up/breakdown, removal and disposal, as required.

Note 1: CREDIT: For items listed in A through F, a credit at a rate of 0.33 times the unit price, times the respective multiplier (for each item) will be taken for each square foot of insulation which the asbestos abatement contractor is not directed to reapply.

Note 2: MINIMUM PAYMENT: The minimum payment per call at any individual job sites or various job sites during the same day will be eight hundred dollars (\$800.00).

Note 3: All payments shall be made as described in paragraph 1.09 herein.

Note 4: WORKING HIGHER THAN 12 FEET ABOVE FLOOR LEVEL OR WORK REQUIRING COMPLEX SCAFFOLDING OR CONSTRUCTION WORK PLATFORMS: Provisions are made in this Contract to compensate the asbestos abatement contractor for work performed in locations that are difficult to access due to



work at elevations that are significantly higher than the normal work level. The unit price for these items will be paid at 1.20 times the unit price described in Paragraphs 1.09, A through R for those portions of the work that are more than twelve (12) feet above the grade for that would be judged as the normal working level.

1.10 GUARANTEE

- A. Work performed in compliance with each task shall be guaranteed for a period of one year from the date the completed work is accepted by the Department of Design and Construction.
- B. The Commissioner of The Department of Design and Construction will notify the asbestos abatement contractor in writing regarding defects in work under the guarantee.

1.11 OCCUPANCY OF SITE NOT EXCLUSIVE

Attention is specifically drawn to the fact that contractors, performing the work of other Contracts, may be brought upon any of the work sites of this Contract. Therefore, the asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other contractors who may be brought upon any site of the work of this Contract. This paragraph applies to those areas outside the regulated Work Area as defined by Title 15, Chapter I of RCNY.

1.12 SUBMITTALS

- A. Pre-Construction Submittals:
 - 1. Attend a pre-construction meeting scheduled by the City of New York Department of Design and Construction. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project Manager. At this meeting, the asbestos abatement contractor shall present three copies of the following items:
 - a. asbestos abatement contractor's scope of work, work plan and schedule.
 - b. Asbestos project notifications, approved variances and plans to Government Agencies.
 - c. Copies of Permits, clearance and licenses if required.
 - d. Schedules: the asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. asbestos abatement contractor shall post a copy of all schedules at the site:



- (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.
 - (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.
- e. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number to nearest hospital) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.
- f. Safety Data Sheets (SDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until SDS are reviewed.
- g. Worker Training and Medical Surveillance: The asbestos abatement contractor shall submit a list of the persons who will be employed by him /her to perform the removal work. Present evidence that workers have received proper training required by the regulations and the medical examinations required by OSHA 29 CFR 1926.1101.
- h. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
- (1) The asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain on title page the project name, name, address and phone number of the asbestos abatement contractor; name, address and phone number of asbestos abatement contractor and City's third party air monitoring firm; emergency



numbers including, but not limited to local Fire/Rescue Department. Log book shall contain a list of personnel approved for entry into the Work Area.

- (2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the asbestos abatement contractor shall submit the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.

- i. Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.

B. During Construction Submittals:

1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.
2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
3. Floor plans indicating asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager.
4. All asbestos abatement contractors' air monitoring and inspection results.

C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from asbestos abatement contractor, sub-asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,



3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.
8. Project Record: The asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall be submitted to DDC as part of the close out documents. The project record shall consist of:
 - a. Copies of licenses of all asbestos abatement contractors involved in the project;
 - b. Copies of NYCDEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
 - c. Copies of all project notifications and reports filed with NYCDEP, NYSDOL and USEPA for the project, with any amendments or variances;
 - d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
 - e. A copy of the air sampling log and all air sampling results;
 - f. A copy of the abatement asbestos abatement contractor's daily log book;
 - g. Copies of all asbestos waste manifests;
 - h. A copy of all Project Monitor's Reports (ACP-15).



- i. A copy of each ATR-1 Form completed for the asbestos project (if required).
- j. A copy of each Asbestos Project Conditional Closeout Report (ACP-20) if required.
- k. A copy of the Asbestos Project Completion Form (ACP-21).

1.13 PROTECTION OF FURNITURE AND EQUIPMENT

Cover all furniture and equipment that cannot be removed from Work Areas. Movable furniture and equipment will be removed from Work Areas by the asbestos abatement contractor prior to start of work. At the conclusion of the work (after final air testing), the asbestos abatement contractor will remove all plastic covering on walls, floors, furniture, equipment and reinstall furniture and equipment. He shall remove and store all sheaths, curtains and drapes, and reinstall same following final clean up.

1.14 UTILITIES

A. General:

All temporary facilities shall be subject to the approval of the Commissioner. Prior to starting work at any site, locations and/or sketches (if required) of temporary facilities must be submitted to the Construction Project Manager for the required approval.

B. Water:

The Department of Design and Construction will furnish all water needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. However, it is the responsibility of the asbestos abatement contractor to ensure that hot water is provided for showering in the decontamination unit. The asbestos abatement contractor shall furnish, install and maintain any needed equipment to meet these requirements at his own expense.

C. Electricity:

The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the asbestos abatement contractor in a building, under their jurisdiction. The asbestos abatement contractor is responsible for routing the electric power to the abatement Work Area.

All temporary lighting and temporary electrical service for Work Area shall be in weatherproof enclosures and be ground fault protected.



- D. In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the asbestos abatement contractor. However, it is the asbestos abatement contractor's (or the general contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

1.15 FEES

The asbestos abatement contractor shall be responsible for any and all fees or charges imposed by Local, State or Federal Law, Rule and Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the date of the Bid opening.

END OF SECTION



**SECTION 02 82 13
NOVEMBER 2017 VERSION**

ASBESTOS ABATEMENT

PART 1 – GENERAL

1.01 DESCRIPTION

- A. The Contract Documents are as defined in the “Agreement”. The General Conditions shall apply to all Work of this Section.
- B. Work specified herein shall be the removal and disposal of Asbestos-Containing Materials (ACM) and asbestos-contaminated materials from designated areas of the Manhattan Criminal Courthouse, located at 100 Centre Street, New York, NY 10013.
- C. The following documents were reviewed and utilized to generate this abatement design specification which serves to locate and quantify the amount of ACM, and asbestos contaminated material, to be abated in support of this project.
 - 1. A set of drawings (100% CD) labeled “DDC-Manhattan Criminal Courthouse, Public Restroom and Holding Pen ADA Upgrade”, dated 01/13/2023, prepared by Jordan Parnass Digital Architecture;
 - 2. Asbestos Survey Report performed by WSP title “Manhattan Criminal Courthouse, Public Restroom and Holding Pen ADA Upgrade,” dated 10/20/2022.
- D. The phasing and scheduling of work for this project shall be coordinated with and approved by the Construction Project Manager and Facility Manager. The Construction Project Manager and Facility Manager will make the final determination on all issues under this Contract covered by this Specification.

1.02 SCOPE OF WORK

- A. The asbestos abatement contractor is to provide all labor, materials, equipment, services, testing, appurtenances, permits and agreements necessary to perform the work required for the abatement of ACM as required by these contract documents. All work shall be performed in accordance with this Specification, EPA regulations, OSHA regulations, New York City Local Law 70, Title 15, Chapter 1 RCNY, New York State Industrial Code 56, NIOSH recommendations, and any other applicable federal, state or local government regulations. Whenever there is a conflict or overlap of the above references, the most stringent provisions are applicable.



- B. The intent of this Specification section is to ensure that the asbestos abatement contractor is responsible for the following:
1. Abatement of all ACM.
 2. Cleaning and decontamination of the entire affected area.
 3. Demolition that may be required to access ACM in each area, Asbestos abatement contractor shall dispose of all debris associated with demolition activities as ACM waste.
 4. Removal and disposal of all ACM found within these areas such as horsehair pipe insulation & associated tar paper, white block pipe insulation, whit block pipe fitting insulation, paper layer pipe insulation, paper layer pipe fitting insulation, pipe insulation and pipe fitting insulation.
 5. Provide all scaffolding, platform installation, equipment, tools, transportation and any other equipment required and/or necessary to complete all work described in the Contract Documents.
 6. The asbestos abatement contractor shall be responsible for and shall include any and all fees or changes imposed by Local, State or Federal Law, Rule or Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the work.
 7. Prior to destructive demolition activities, the DDC may elect to collect bulk samples of assumed asbestos-containing materials and analyze the bulk samples for asbestos content.
- C. The asbestos abatement contractor shall perform the following work as described below and indicated on the drawings. The drawings are only a diagrammatic representation of the Work Areas and do not constitute the actual quantities of material. Asbestos abatement contractor is responsible for the confirmation of the actual total quantities of the Work.

1. Drawing H002.00: Second Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 1A & 1B**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation



(black) & pipe fitting insulation (gray) within **Work Area 2A & 2B**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.

Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
1A & 1B	NYC DEP Section § 1-106 Tent Containment Procedures	–	30 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
2A & 2B		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

2. Drawing H003.00: Fourth Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 3A & 3B**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 4A & 4B**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.



Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
3A & 3B	NYC DEP Section § 1-106 Tent Containment Procedures	–	30 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
4A & 4B		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

3. Drawing H004.00: Tenth Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 5**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black); white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 6**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black); white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.



Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
5	NYC DEP Section § 1-106 Tent Containment Procedures	–	15 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
6		–	15 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

4. Drawing H005.00: Eleventh Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 7A & 7B**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 8A & 8B**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.



Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
7A & 7B	NYC DEP Section § 1-106 Tent Containment Procedures	–	30 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
8A & 8B		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

5. Drawing H006.00: Thirteenth Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 9A & 9B**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 10A & 10B**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.

Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
9A & 9B	NYC DEP Section § 1-106 Tent Containment Procedures	–	30 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
10A & 10B		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.



6. Drawing H007.00: Fifteenth Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 11**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.
- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 12A & 12B**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.

Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
11	NYC DEP Section § 1-106 Tent Containment Procedures	–	15 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
12A & 12B		–	15 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

7. Drawing H007.00: Sixteenth Floor Plan

- a. Remove and dispose of asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) within **Work Area 13A & 13B**. Asbestos-containing horsehair pipe insulation (brown/gray) and associated tar paper (black) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.



- b. Remove and dispose of asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) within **Work Area 14**. Asbestos-containing white block pipe insulation (white) & pipe fitting insulation (gray); paper layer pipe insulation (brown) & pipe fitting insulation (gray) and pipe insulation (black) & pipe fitting insulation (gray) shall be removed utilizing NYCDEP Title 15, Chapter 1, § 1-106 Tent Containment Procedures.

Work Area	Removal Procedure	Approximate Square Feet (Sq. Ft.)	Approximate Linear Feet (Ln. Ft.)
13A & 13B	NYC DEP Section § 1-106 Tent Containment Procedures	–	30 Ln. Ft. of Horsehair Pipe Insulation (Brown/Gray) and Associated Tar Paper (Black)
14		–	100 Ln. Ft. of White Block Pipe Insulation (White) & Pipe Fitting Insulation (Gray); Paper Layer Pipe Insulation (Brown) & Pipe Fitting Insulation (Gray) and Pipe Insulation (Black) & Pipe Fitting Insulation (Gray) ¹

Note: ¹ Pipe and pipe fitting insulation is assumed to exist inside pipe risers.

- D. The facility is under the jurisdiction of the NYC Department of Citywide Administrative Services. The asbestos abatement contractor shall perform the work of this contract in a manner that will be least disruptive to the normal use of the building.
- E. Asbestos abatement contractor's attention is directed to the fact that patents cover certain methods of asbestos abatement indicated in the specifications. To date, patents have been issued with regard to negative pressure enclosures or negative or reduced pressure and glove-bag.
- F. Asbestos abatement contractor shall be solely responsible for and shall hold the City of New York Department of Design and Construction and the City harmless from, any and all damages, losses and expenses resulting from any infringement by Asbestos abatement contractor of any patent, including but not limited to the patents described above, used by Asbestos abatement contractor during performance of this agreement.
- G. Prior to starting, the asbestos abatement contractor must notify the Commissioner of the City of New York Department of Design and Construction if he anticipates any difficulty in performing the work as directed and required by these Specifications. Asbestos abatement contractor shall be required to attend an on-site



job meeting with the Construction Project Manager prior to start of work to examine conditions of the site for removal and plan the sequence for removal operations.

- H. The asbestos abatement contractor shall retain a certified Project Designer for the preparation of an Asbestos Variance Application (ACP-9), if required.
- I. The asbestos abatement contractor shall be responsible for preparing and submitting all filings, notifications, amendments and variances, etc. required by all City, State and Federal regulatory agencies having jurisdiction, at no additional cost to the NYC DDC.
- J. The general contractor shall retain a Registered Design Professional (person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York) to prepare a Work Place Safety Plan (WPSP), if required.
- K. The general contractor shall retain a Registered Design Professional (person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York) to perform final inspections required pursuant to Title 28 of the Administrative Code, including but not limited to special inspections required under Chapter 17 of the Building Code. Such special inspections and A-TR1 forms shall be completed by the Registered Design professional.
- L. For coordination with other Asbestos abatement contractors, see the General Conditions governing all Contracts.
- M. Related Asbestos Removal Work Under Other Contracts:
 - 1. Each asbestos abatement contractor shall be responsible for the removal of incidental asbestos not identified in this section and found prior to or during the Work.
 - 2. Incidental asbestos is defined as ACM that is discovered during the course of their work that must be abated to enable them to perform the work of their Contract.
- N. Work Hours:
 - 1. The asbestos abatement contractor shall establish his work schedule in a way that avoids interference or conflict with the normal functioning of the facility. Work in the evenings shall be done at no additional cost to the City.
 - 2. All work shall be done during regular working hours unless the Asbestos abatement contractor requests authorization to work other than regular



working hours and such authorization is granted by the Commissioner (Regular working hours are those during which any given facility in which work is to be done is customarily open and functioning). If such work schedule is authorized by the Commissioner the work shall be done at no additional cost to the City.

3. The order of phases and start dates associated with each will be determined by the Construction Project Manager.
 4. Asbestos abatement contractor shall be required to schedule waste transfer during evening hours, when activity within the facility is at a minimum. Evening hours are defined as 6:00 p.m. to 6:00 a.m. Waste transfer must be approved by the Construction Project Manager and Facility Manager.
- O. The following conditions shall apply to all temporary shutdowns of existing services:
1. All temporary lighting and temporary electrical services for use in the Work Area shall be in weatherproof enclosures and be ground fault protected and:
 - a. Shall be performed at no additional charge to the City.
 2. Shall be performed at times not interfering with the other activities in the building.
 3. Shall be performed only with written consent from the Commissioner and the Facility Manager.
 4. Shall be made through written request to the Commissioner at least 10 days in advance with complete written description of the work to be performed.
- P. Stages of Asbestos Removal Work:
1. The asbestos abatement contractor will be required to perform the work and it is the intent of this Specification to remove all asbestos containing and asbestos contaminated materials from the Work Area. The asbestos abatement contractor is responsible for verifying all quantities of materials listed.
- Q. Certain equipment in the Work Area may need to remain operational during removal. Therefore, the removal of ACM from this equipment shall be performed as the last removal activities within the Work Area. The Asbestos abatement contractor shall coordinate the scheduling for the removal of ACM on functioning equipment with the Construction Project Manager.



1.03 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must be approved through the Department's Request for Subcontractor Approval, administered by the Agency Chief Contracting Office (ACCO), Vendor Integrity Unit. The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (6) below. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, demonstrate for the three year period prior to the work that it has been licensed by the New York State Department of Labor (NYSDOL), as an "Asbestos Abatement Contractor". The asbestos abatement contractor shall submit copies of the asbestos abatement contractors NYSDOL License for the past three years
 2. The asbestos abatement contractor must, for the three-year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 3. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must submit a list of five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$1,000,000 in each of the three years.
 4. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following information for the project; name and location of the project; name title and telephone number and email address of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work; brief description of the scope of work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.
 5. The asbestos abatement contractor must demonstrate that it has the financial resources, certified supervisory personnel and equipment necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract. The Department may also conduct an inspection of the asbestos abatement contractor's facility to verify if the contractor has equipment and staffing to perform the work.



6. The asbestos abatement contractor must submit a copy of their Corporate Health and Safety Plan for review and acceptance. A Job Hazard Analysis (JHA) for the specific work conducted must be included.

- B. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof. Provide materials or workmanship that meet or exceed the specifically named codes or standards where required by these specifications.

- C. Site Investigation: Asbestos abatement contractor shall inspect all the specifications and related drawings, and will investigate and confirm the site conditions affecting the work, including, but not limited to (1) through (5) below. The asbestos abatement contractor will attend a walkthrough site inspection with the department's Project Manager and the Third-Party Air Monitor prior to the work. Such walkthrough will be scheduled at the Department's convenience.
 1. Physical considerations and conditions of both the material and structure. These considerations include any obstacles or obstructions encountered in accessing or removing the material.
 2. Handling, storage, transportation and disposal of the material.
 3. Availability of qualified and skilled labor.
 4. Availability of utilities.
 5. Exact quantities of all materials to be disturbed and/or removed.

1.04 WORK BY OTHERS

The City reserves the right during the term of this Contract to have work performed on asbestos abatement projects by other asbestos abatement contractors as the situation warrants.

1.05 DEFINITIONS

- A. General Explanation: Certain terms used in this Specification Section are defined below. Definitions and explanations of this Specification Section are not necessarily complete or exclusive, but are general for the Work to the extent they are not stated more explicitly in another element of the Contract Documents.



B. Definitions in General Use:

1. **Approve:** Where used in conjunction with Engineer's response to submittals, requests, applications, inquiries, reports and claims by Asbestos abatement contractor, the meaning of term "approved" will be held to limitations of Engineer's responsibilities and duties as specified in Contract Documents. In no case will "approval" by Engineer be interpreted as a release of Asbestos abatement contractor from responsibilities to fulfill requirements of Contract Documents.
2. **Directed, Requested, etc.:** Where not otherwise explained, terms such as "directed," "requested," "authorized," "selected," "approved," "required," "accepted," and "permitted" mean "directed by Engineer," "requested by Engineer," and similar phrases. However, no such implied meaning will be interpreted to extend Engineer's responsibility into Asbestos abatement contractor's responsibility for construction supervision.
3. **Furnish:** Except as otherwise defined in greater detail, term "furnish" is used to mean supply and deliver to project site, ready for unloading, unpacking, assembly, installation, etc., as applicable in each instance.
4. **Indicated:** The term "indicated" is a cross-reference to graphic representations, notes or schedules on Drawings, to other paragraphs or schedules in the Specifications, and to similar means of recording requirements in Contract Documents. Where terms such as "shown," "noted," "scheduled," and "specified" are used in lieu of "indicated," it is for purpose of helping reader locate cross-reference, and no limitation of location is intended except as specifically noted.
5. **Install:** Except as otherwise defined in greater detail, term "install" is used to describe operations at Project site including unloading, unpacking, assembly, erection, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning and similar operations, as applicable in each instance.
6. **Installer:** The term "installer" is defined as the entity (person or firm) engaged by the asbestos abatement contractor, or its sub-asbestos abatement contractor for performance of a particular unit of work at Project site, including installation, erection, application and similar required operations. It is a general requirement that such entities (installers) be expert in operations they are engaged to perform.
7. **Provide:** Except as otherwise defined in greater detail, term "provide" means furnish and install, complete and ready for intended use, as applicable in each instance.



8. **Third-Party Air Monitor:** The term “Third-Party Air Monitor” is defined as an entity engaged by City and Construction Project Manager to perform specific inspections or tests of the work, either at Project site or elsewhere; and to report and (if required) interpret results of those inspections or tests.

C. **Definitions Relative to Asbestos Abatement:**

1. **Abatement:** Any and all procedures physically taken to control fiber release from asbestos-containing materials. This includes removal, encapsulation, enclosure, cleanup and repair.
2. **Adequately Wet:** The complete penetration of a material with amended water to prevent the release of particulates. If visible emissions are observed coming from asbestos-containing material, then the material has not been adequately wetted. However, the absence of visible emissions is not evidence of being adequately wet. ACM must be fully penetrated with the wetting agent in order to be considered adequately wet. If the ACM being abated is resistant to amended water penetration, wetting agent shall be applied to the material prior to and during removal as necessary to minimize fiber release.
3. **Aggressive Sampling:** Method of sampling in which the individual collecting the air sample creates activity by the use of mechanical equipment during the sampling period to stir up settled dust and simulate activity in that area of the building.
4. **AHERA:** Asbestos Hazard Emergency Response Act of 1986
5. **AIHA:** American Industrial Hygiene Association.
6. **Airlock:** System for permitting entrance and exit while restricting air movement between a contaminated area and an uncontaminated area. It consists of two curtained doorways separated by a distance of at least three feet such that one passes through one doorway into the airlock, allowing the doorway sheeting to overlap and close off the opening before proceeding through the second doorway, thereby preventing flow-through contamination.
7. **Air Sampling:** Process of measuring the fiber content of a known volume of air collected during a specific period. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400, or the provisional transmission electron microscopy methods developed by the US EPA which is utilized for lower detection levels and specific fiber identification.



8. Ambient Air Monitoring: “Ambient air monitoring” shall mean measurement or determination of airborne asbestos fiber concentrations outside but in the general vicinity of the worksite.
9. Amended Water: Water to which a surfactant has been added.
10. ANSI: American National Standards Institute
11. Area Air Sampling: Any form of air sampling or monitoring where the sampling device is placed at some stationary location.
12. Asbestos: Any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite (cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthophyllite and actinolite.
13. Asbestos-Containing Material (ACM): Asbestos or any material containing more than one-percent asbestos.
14. Asbestos-Containing Waste Material: ACM, asbestos-contaminated objects or debris associated with asbestos abatement requiring disposal.
15. Asbestos-Contaminated Objects: Any objects which have been contaminated by asbestos or asbestos-containing material.
16. Asbestos Assessment Report: “Asbestos Assessment Report” shall mean the “Form ACP-5” form, as approved by NYCDEP, by which a NYCDEP-certified asbestos investigator certifies that a building or structure (or portion thereof) is free of ACM or the amount of ACM to be abated constitutes a minor project.
17. Asbestos Handler: Individual who disturbs, removes, repairs, or encloses asbestos material. This individual shall have completed approved training course(s) and be in possession of certification issued by NYCDEP and NYSDOL.
18. Asbestos Handler Supervisor: Individual who supervises the handlers during an asbestos project and ensures that proper asbestos abatement procedures as well as individual safety procedures are being adhered to. This individual shall have completed approved training course(s) and be in possession of certification issued by NYCDEP and NYSDOL.
19. Asbestos Investigator: An individual certified by NYCDEP as having successfully demonstrated his or her ability to identify the presence of and evaluate the condition of asbestos in a building or structure.



20. Asbestos Project: Any form of work performed in a building or structure which will disturb (e.g., remove, enclose, encapsulate) asbestos-containing material.
21. ASTM: American Society for Testing and Materials.
22. Asbestos Project Notification: The “Form ACP-7” asbestos project notification form as approved by DEP.
23. Authorized Visitor: Authorized visitor shall mean the building owner and his/her representative, and any representative of a regulatory or other agency having jurisdiction over the project.
24. Building Owner: Person in whom legal title to the premises is vested unless the premises are held in land trust, in which instance Building Owner means the person in whom beneficial title is vested.
25. Building Materials: Any and all manmade materials, including but not limited to interior and exterior finishes, equipment, bricks, mortar, concrete, plaster, roofing, flooring, caulking, sealants, tiles, insulation, and outdoor paving such as sidewalks, paving tiles and asphalt.
26. Certified Industrial Hygienist (CIH): Individual with a minimum of five years experience as an industrial hygienist and who has successfully completed both levels of the examination administered by the American Board of Industrial Hygiene and who is currently certified by that board.
27. Certified Safety Professional (CSP): Individual having a bachelor's degree from an accredited college or university and a minimum of four years experience as a safety professional and who has successfully completed both levels of the examination administered by the Board of Certified Safety Professionals and who is currently certified by that board.
28. Chain of Custody: “Chain of Custody” shall mean the form or set of forms that document the collection and transfer of a sample.
29. City: City of New York
30. Clean Room: An uncontaminated area or room that is part of worker decontamination enclosure system with provisions for storage of workers' street clothes and protective equipment.
31. Clearance Air Monitoring: Employment of aggressive sampling techniques with a volume of air collected to determine the airborne concentration of residual fibers and shall be performed as the final abatement activity.



32. Commissioner: shall mean the head of the Agency that has entered into this contract or his/her duly authorized representative.
33. Competent Person: Shall mean the designated person as defined by OSHA in 29 CFR1926.1101.
34. Curtained Doorway: Device that consists of at least three overlapping sheets of fire retardant plastic over an existing or temporarily framed doorway. One sheet shall be secured at the top and left side, the second sheet at the top and right side, and the third sheet at the top and left side. All sheets shall have weights attached to the bottom to ensure that the sheets hang straight and maintain a seal over the doorway when not in use.
35. Decontamination Enclosure System: Series of connected rooms, separated from the Work Area and from each other by air locks, for the decontamination of workers, materials, waste containers, and equipment.
36. Demolition: The dismantling or razing of a building, including all operations incidental thereto (except for asbestos abatement activities), for which a demolition permit from the New York City Department of Buildings is required.
37. Department: shall mean the New York City Department of Design and Construction (DDC).
38. NYCDEP or DEP: The New York City Department of Environmental Protection.
39. Disturb: Any action taken which may alter, change, or stir, such as but not limited to the removal, encapsulation, enclosure or repair of asbestos-containing material.
40. DOB: The New York City Department of Buildings.
41. Egress: A continuous and unobstructed path of vertical and horizontal egress travel from any occupied portion of a building or structure to a public way. A means of egress consists of three separate and distinct parts: the exit access, the exit and the exit discharge.
42. ELAP: Environmental Laboratory Approval Program administered by the New York State Department of Health.
43. Encapsulant (sealant) or Encapsulating Agent: Liquid material which can be applied to ACM and which temporarily controls the possible release of asbestos fibers from the material either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the material and



binding its components together (penetrating encapsulant). A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.

44. Encapsulation: The coating or spraying of asbestos-containing material encapsulant. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.
45. Enclosure: Construction of airtight walls and/or ceilings between ACM and the facility environment, or around surfaces coated with ACM, or any other appropriate procedure as determined by the NYCDEP which prevents the release of asbestos fibers.
46. EPA or USEPA: United States Environmental Protection Agency.
47. Equipment Room: Contaminated area or room that is part of the worker decontamination enclosure system with provisions for the storage of contaminated clothing and equipment.
48. Exit: That portion of a means of egress system which is separated from other interior spaces of a building or structure by fire-resistance-rated construction to provide a protected path of egress travel between the exit access and the exit discharge.
49. FDNY: The Fire Department of the City of New York.
50. Fiber: An acicular single crystal or a similarity elongated polycrystalline aggregate which displays some resemblance to organic fibers by having such properties as flexibility, high aspect ratio, silky luster, axial lineation, and others, and which has attained its shape primarily through growth rather than cleavage.
51. Fixed Object: A unit of equipment, furniture, or other item in the work area which cannot be removed from the work area. Fixed objects shall include equipment, furniture, or other items that are attached, in whole or in part, to a floor, ceiling, wall, or other building structure or system or to another fixed object and cannot be reasonably removed from the work area. Fixed objects shall also include pipes and other equipment inside the work area which are not the subject of the asbestos project. Active fire suppression system components shall not be considered fixed objects.



52. Glovebag technique: shall mean a method for removing asbestos-containing material from heating, ventilation and air conditioning (HVAC) ducts, short piping runs, valves, joints, elbows, and other nonplanar surfaces. The glovebag assembly is a manufactured device consisting of a large bag (constructed of at least 6-mil transparent plastic), two inward-projecting long sleeve gloves, one inward-projecting waterwand sleeve, an internal tool pouch, and an attached, labeled receptacle for asbestos waste. The glovebag is constructed and installed in such a manner that it surrounds the object or area to be decontaminated and contains all asbestos fibers released during the removal process.
53. HEPA-Filter: High efficiency particulate air filter capable of trapping and retaining 99.97 percent of particles (asbestos fibers) greater than 0.3 micrometers mass median aerodynamic equivalent diameter.
54. HEPA vacuum equipment: "HEPA vacuum equipment" shall mean vacuuming equipment with a HEPA filter.
55. Holding Area: Chamber in the equipment decontamination enclosure located between the washroom and an uncontaminated area.
56. Homogeneous Work Area: Portion of the Work Area that contains one type of ACM and/or where one type of abatement is used.
57. Industrial Hygiene: Science and art devoted to the recognition, evaluation, and control of those environmental factors or stresses, arising in or from the work place, which may cause sickness, impaired health and well being, or significant discomfort and inefficiency among worker or among the citizens of the community.
58. Industrial Hygienist: Individual having a college or university degree or degrees in Engineering, Chemistry, Physics or Medicine, or related Biological Sciences who, by virtue of special studies and training, has acquired competence in industrial hygiene. Such special studies and training must have been sufficient in all of the above cognate sciences to provide the abilities:
 - a. To recognize the environmental factors and to understand their effect on people and their well being; and
 - b. To evaluate, on the basis of experience and with the aid of quantitative measurement techniques, the magnitude of these stresses in terms of ability to impair people's health and well being; and
 - c. To prescribe methods to eliminate, control, or reduce such stresses when necessary to alleviate their efforts.



59. Isolation Barrier: The construction of partitions, the placement of solid materials, and the plasticizing of apertures to seal off the work place from surrounding areas and to contain asbestos fibers in the work area.
60. Large Asbestos Project: Asbestos project involving the disturbances (e.g., removal, enclosure, encapsulation) of 260 linear feet or more of ACM or 160 square feet or more of ACM.
61. Log: An official record of all activities that occurred during the project. At a minimum, the log shall identify the building owner, agent, asbestos abatement contractor, and workers, and other pertinent information including daily activities, cleanings and waste transfers, names and certificate numbers of asbestos handler supervisors and asbestos handlers; results of inspections of decontamination systems, barriers, and negative pressure ventilation equipment; summary of corrective actions and repairs; work stoppages with reason for stoppage; manometer readings at least twice per work shift; daily checks of emergency and fire exits and any unusual events.
62. Minor Project: A project involving the disturbance (e.g., removal, enclosure, encapsulation, repair) of 25 linear feet or less of asbestos containing material or 10 square feet or less of asbestos containing material.
63. Movable Object: Unit of equipment or furniture in the Work Area that can be removed from the Work Area.
64. Negative Air Pressure Equipment: Portable local exhaust system equipped with HEPA filtration. The system shall be capable of creating a negative pressure differential between the outside and inside of the Work Area.
65. NESHAPS: National Emission Standards for Hazardous Air Pollutants.
66. NFPA: The National Fire Protection Association.
67. NIOSH: National Institute for Occupational Safety and Health.
68. DEP or NYCDEP: New York City Department of Environmental Protection
69. NYSDOL: New York State Department of Labor.
70. NYSDOL ICR 56: "NYSDOL ICR 56" shall mean Part 56 of the Official Compilation of Codes, Rules and Regulations of the State of New York or 12 NYCRR Part 56.
71. NYSDOH: The New York State Department of Health.



72. **Obstruction:** The blocking of a means of egress with any temporary structure or barrier. A double layer of fire-retardant 6-mil polyethylene sheeting shall not be considered an obstruction when it is prominently marked as an exit with photo luminescent signage or paint and cutting tools (knife, razor) are attached to the work area side of the sheeting for use in the event that the sheeting must be cut to permit egress. A corridor shall not be considered obstructed when there is a clear path measuring at least three (3) feet wide.
73. **Occupied Area:** Area of the work site where abatement is not taking place and where personnel or occupants normally function or where workers are not required to use personal protective equipment.
74. **OSHA:** Occupational Safety and Health Administration.
75. **Outside air:** "Outside air" shall mean the air outside the work place.
76. **Person:** Individual, partnership, company, corporation, association, firm, organization, governmental agency, administration, or department, or any other group of individuals, or any officer or employee thereof.
77. **Personal Air Monitoring:** Method used to determine employees' exposure to airborne asbestos fibers. The sample is collected outside the respirator in the worker's breathing zone.
78. **Personal Protective Equipment (PPE):** Appropriate protective clothing, gloves, eye protection, footwear, and head gear.
79. **Phase Contrast Microscopy (PCM):** The measurement protocol for the assessment of the fiber content of air. (NIOSH Method 7400).
80. **Physician:** Person licensed or otherwise authorized under Article 131 Section 65.22 of the New York State Education Law.
81. **Plasticize:** To cover floors and walls with fire retardant plastic sheeting as herein specified or by using spray plastics as acceptable to the Department.
82. **Polarized Light Microscopy (PLM):** The measurement protocol for the assessment of the asbestos content of bulk materials. (Interim Method for the Determination of Asbestiform Materials in Bulk Insulation Samples- 40 CFR Part 763, Subpart F, Appendix A as amended on September 1, 1982)
83. **Project Designer:** A person who holds a valid Project Designer Certificate issued by the New York State Department of Labor.



84. Project Monitor: A person who holds a valid Project Monitor Certificate issued by the New York State Department of Labor.
85. Qualitative Fit Test: Individual test subject's responding (either voluntarily or involuntarily) to a chemical challenge outside the respirator face-piece. Acceptable methods include irritant smoke test, odorous vapor test, and taste test.
86. Quantitative Fit Test: Exposing the respiratory wearer to a test atmosphere containing an easily detectable, nontoxic aerosol, vapor or gas as the test agent. Instrumentation, which samples the test atmosphere and the air inside the face-piece of the respirator, is used to measure quantitatively the leakage into the respirator. There are a number of test atmospheres, test agents, and exercises to perform during the test.
87. Registered Design Professional: A person licensed and registered to practice the professions of architecture or engineering under the Education Law of the State of New York.
88. Removal: Stripping of any asbestos- containing materials from surfaces or components of a facility or taking out structural components in accordance with 40 CFR 61 Subparts A and M.
89. Renovation: An addition or alteration or change or modification of a building or the service equipment thereof, that is not classified as an ordinary repair as defined in §27-125 of the Administrative Code of the City of New York.
90. Repair: Corrective action using specified work practices (e.g., glovebag, plastic tent procedures, etc.) to minimize the likelihood of fiber release from minimally damaged areas of ACM.
91. Replacement material: Any material used to replace ACM that contains less than .01 percent asbestos.
92. Shift: A worker's, or simultaneous group of workers', complete daily term of work.
93. Shower Room: Room between the clean room and the equipment room in the worker decontamination enclosure with hot and cold running water controllable at the tap and arranged for complete showering during decontamination.
94. Small Asbestos Project: Asbestos project involving the disturbance (e.g., removal, enclosure, encapsulation) of more than 25 and less than 260 linear feet of ACM or more than ten and less than 160 square feet of ACM.



95. Staging Area: Work Area near the waste transfer airlock where containerized asbestos waste has been placed prior to removal from the Work Area.
96. Strip: To remove asbestos materials from any part of the facility.
97. Structural Member: Load-supporting member of a facility, such as beams and load-supporting walls, or any non-load-supporting member, such as ceiling and non-load-supporting walls.
98. Surface barriers: The plasticizing of walls, floors, and fixed objects within the work area to prevent contamination from subsequent work.
99. Surfactant: Chemical wetting agent added to water to improve penetration.
100. Transmission Electron Microscopy (TEM): The measurement protocol for the assessment of the asbestos fiber content of air. Interim Transmission Electron Microscopy Analytical Methods-40 CFR Part 763, Subpart E, Appendix A.
101. Visible Emissions: Emissions containing particulate material that are visually detectable without the aid of instruments.
102. Washroom: Room between the Work Area and the holding area in the equipment decontamination enclosure system where equipment and waste containers are wet cleaned and/or HEPA-vacuumed prior to disposal.
103. Waste decontamination enclosure system: “Waste decontamination enclosure system” shall mean the decontamination enclosure system designated for the controlled transfer of materials and equipment, consisting of a washroom and a holding area.
104. Wet Cleaning: “Wet cleaning” shall mean the removal of asbestos fibers from building surfaces and objects by using cloths, mops, or other cleaning tools which have been dampened with water.
105. Wet methods: “Wet methods” shall mean the use of amended water or removal encapsulants to minimize the generation of fibers during ACM disturbance.
106. Work Area: Designated rooms, spaces, or areas of the building or structure where asbestos abatement activities take(s) place.



107. Worker Decontamination Enclosure System: Portion of a decontamination enclosure system designed for controlled passage of workers and authorized visitors, consisting of a clean room, a shower room, and an equipment room separated from each other and from the Work Area by airlocks and curtained doorways.
108. Work Place: The work area and the decontamination enclosure system(s).
109. Work Place Safety Plan: Construction documents prepared by a registered design professional and submitted for review by DEP in order to obtain an asbestos abatement permit. Such plan shall include, but not be limited to, plans, sections, and details of the work area clearly showing the extent, sequence, and means and methods by which the work is to be performed.
110. Work Site: Premises where abatement activity is being performed. May be composed of one or more Work Areas.

1.06 STANDARD OPERATING PROCEDURES

- A. Develop and implement a written standard procedure for abatement work to ensure maximum protection and safeguard from asbestos exposure of the workers, visitors, employees, public, and environment.

- B. TELEPHONE DEVICE

The asbestos abatement contractor or his authorized representative shall, at all times during the normal workday or during periods of overtime work under this Contract, carry a mobile cellular telephone capable of transmitting photographs and data. He/she shall supply the Department of Design and Construction with the phone number for the device and he/she is liable to respond back to the calls from DDC within the next one (1) hour period after he/she receives calls from DDC. The cost to the asbestos abatement contractor for this device and all charges accruing thereto is deemed included in the work.

- C. The standard operating procedure shall ensure:
 1. Tight security from unauthorized entry into the workspace.
 2. Restriction of asbestos abatement contractor's personnel to the immediate Work Area and access/egress routes.
 3. Donning of proper protective clothing and respiratory protection prior to entering the Work Area.



4. Safe work practices in the work place, including provisions for inter-room communications, exclusion of eating, drinking, smoking, or in any way breaking the respiratory protection.
 5. Proper exit practices from the work space to the outside through the showering and decontamination facilities.
 6. Removing asbestos in a way that minimizes release of fibers.
 7. Packing, labeling, loading, transporting, and disposing of contaminated material in a way that minimizes exposure and contamination.
 8. Emergency evacuation procedures, for medical or safety situations, to minimize the potential exposure to airborne asbestos fibers for emergency personnel, building occupants, and building environment.
 9. Safety from accidents in the workspace, especially from electrical shocks, fall hazards associated with scaffolding, slippery surfaces, and entanglements in loose hoses and equipment.
 10. Provisions for effective supervision, air monitoring and personnel monitoring for exposure during the work.
 11. Engineering controls that minimize exposure to fibers within the workspace.
 12. The asbestos abatement contractor shall provide a 24-hour fire watch throughout the entire term of the project, to protect against fire and unauthorized entry into the workspace when required by the NYCDEP. Fire watch shall be performed by an individual who is a certified asbestos worker capable of entering the Work Area for regular inspections.
- D. Provide an Asbestos Handler Supervisor to provide continuous supervision of all work, and to be responsible for the following:
1. Ensure that individuals are using proper personal protective equipment, are trained in its use and hold valid NYCDEP and NYSDOL Asbestos Handler certificates.
 2. Maintain entry log records and ensure that they are recorded in accordance with the provisions of Title 15, Chapter 1 of RCNY and NYSDOL ICR 56.
 3. Surveillance of the Work Areas at a minimum of once per work shift or as required by Title 15, Chapter 1 of RCNY and NYSDOL ICR 56 -7.3, to ensure the integrity of work place isolation, negative pressure equipment and workers personal protective equipment is not torn or ripped and that respiratory protection is worn at all times.



4. Ensure that sufficient personal protective equipment is stored in the clean room.
5. Take precautions to prevent heat stress. Precautions include, but are not limited to, selecting lightweight protective clothing, reducing the work rate, and providing adequate fluid breaks.
6. Perform work area inspection with project monitor prior to the commencement of final clearance air monitoring.
7. The asbestos abatement contractor shall retain the asbestos handler supervisor to perform a visual inspection prior to the post-abatement clearance air monitoring to confirm that all containerized waste has been removed from work and holding areas and there is no visible ACM debris or residue on or about all abated surfaces.

E. ENGINEERING CONTROLS

1. All asbestos projects shall utilize negative pressure ventilation equipment.
 - a. The asbestos abatement contractor shall use a manometer to document the pressure differential. The asbestos abatement contractor shall install and make the manometer operational once the negative pressure has been established in the work area. Magnahelic manometers shall be calibrated at least every six months and a copy of the current calibration certification shall be available at the work site.
2. Negative pressure ventilation equipment shall be installed and operated to provide at least one air change in the work area every 15 minutes. Where there are no floor or wall barriers because floor or wall material is being abated, there shall be at least one air change in the work area every ten minutes.
3. The negative pressure ventilation equipment shall operate continuously, 24 hours a day, from the establishment of isolation barriers through successful clearance air monitoring. If such equipment shuts off, adjacent areas shall be monitored for asbestos fibers.
4. A static negative air pressure of 0.02 inches (minimum) water column shall be maintained at all times in the work place during abatement to ensure that contaminated air in the Work Area does not filter back to uncontaminated areas.



5. If the contaminated area of an asbestos project covers the entire floor of the affected building, or an area greater than 15,000 square feet on any given floor, the installation of a negative air cut off switch or switches shall be required at a single location outside the work place, such as inside a stairwell, or at a secured location in the ground floor lobby when conditions warrant. The required switch or switches shall be installed by a licensed electrician pursuant to a permit issued by the Department of Buildings. If negative pressure ventilation equipment is used on multiple floors, the cut off switch shall be able to turn off the equipment on all floors.
6. On loss of negative pressure or electric power to the negative pressure ventilating units, abatement shall stop immediately and shall not resume until power is restored and negative pressure ventilation equipment is operating again.
7. Negative pressure ventilation equipment shall be exhausted to the outside of the building away from occupied areas.
 - a. All openings (including but not limited to operable windows, doors, vents, air intakes or exhausts of any mechanical devices) less than 15 feet from the exterior exhaust duct termination location shall be plasticized with two layers of fire retardant 6-mil polyethylene sheeting, or a second negative pressure ventilation unit with the primary unit's capacity shall be connected in series prior to exhausting to the outside.
 - b. Negative pressure ventilation equipment shall exhaust away from areas accessible to the public.
 - c. All ducting shall be sealed and braced or supported to maintain airtight joints. Ducts shall be reinforced and shall be installed so as to prevent breakage. Damage to ducts must be repaired immediately.
8. Where ducting to the outside is not possible, a second negative pressure ventilation unit compatible with the primary unit's capacity shall be connected in series. The area receiving the exhaust shall have sufficient, non-recycling exhaust capacity to the outside of the structure.
9. In the event that there is a failure of the containment system or a breach in the Isolation Barriers, all abatement work will cease and the asbestos abatement contractor will immediately correct the condition. Abatement work will not resume until the Work Area has been smoke tested by the third party laboratory and approved by the Construction Project Manager.



F. LOCKDOWN ENCAPSULATION PROCEDURES

1. The following procedures shall be followed to seal in non-visible residue while conducting lockdown encapsulation on all surfaces from which ACM has not been removed:
 - a. Only encapsulants rated as acceptable or marginally acceptable on the basis of Battelle Columbus Laboratory test procedures and rating requirements developed under the 1978 USEPA Contract shall be used for lockdown encapsulation.
 - b. The encapsulant solvent or vehicle shall not contain a volatile hydrocarbon unless reviewed and approved by DEP.
 - c. Latex paint with solids content greater than 15 percent shall be considered a lockdown sealant for coating all non-metallic surfaces.
 - d. Encapsulants shall be applied using airless spray equipment. Spraying is to occur at the lowest pressure range possible to minimize fiber release from encapsulant impact at the surface. It shall be applied with a consistent horizontal or vertical motion.
 - e. The cleaned layer of the surface barriers shall be removed from walls and floors.

The isolation barriers shall remain in place throughout cleanup. Decontamination enclosure systems shall remain in place and be utilized. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.

1.07 NOTIFICATIONS, PERMITS, WARNING SIGNS, LABELS, AND POSTERS

- A. The asbestos abatement contractor shall submit an Asbestos Project Notification (ACP-7) to the NYCDEP listing each work area within the building separately one week in advance of the start of work.
- B. The registered design professional shall obtain an asbestos abatement permit authorizing the performance of construction work as required for asbestos projects involving one or more of the following activities:
 1. Obstruction of an exit door leading to an exit stair or the exterior of the building;
 2. Obstruction of an exterior fire escape or access to that fire escape;



3. Obstruction of a fire-rated corridor leading to an exit door;
 4. Removal of handrails in an exit stair or ramp;
 5. Removal or dismantling of any fire alarm system component including any fire alarm-initiating device (e.g., smoke detectors, manual pull station);
 6. Removal or dismantling of any exit sign or any component of the exit lighting system, including photo luminescent exit path markings;
 7. Removal or dismantling of any part of a sprinkler system including piping or sprinkler heads;
 8. Removal or dismantling of any part of a standpipe system including fire pumps or valves;
 9. Removal of any non-load bearing / non-fire-rated wall (greater than 45 square feet or 50 percent of a given wall);
 10. Any plumbing work other than the repair or replacement of plumbing fixtures;
 11. Removal of any fire-resistance rated portions of a wall, ceiling, floor, door, corridor, partition, or structural element enclosure including spray-on fire resistance rated materials;
 12. Removal of any fire damper, smoke damper, fire stopping material, fire blocking, or draft stopping within fire-resistance rated assemblies or within concealed spaces;
 13. Any work that otherwise requires a permit from the DOB (full demolitions, alterations, renovations, modifications or plumbing work).
- C. The asbestos abatement contractor shall provide a floor plan showing the areas of the building under abatement and the location of all fire exits in said areas. It shall be prominently posted in the building lobby or comparable location, along with a notice stating the location within the building of the negative air cutoff switch, if applicable.
- D. When one or more of the activities listed in 1.07 (B) (1-8) and (B)(13) of this specification an asbestos abatement permit is required by DEP. The general contractor is responsible for submitting, a work place safety plan (WPSP) and any other applicable construction documents. These documents must be prepared and sealed by a registered design professional.



- E. A WSPS is not required for projects requiring an asbestos abatement permit due to one or more of the activities listed in 1.07 (B) (9-12) of this specification. The asbestos abatement contractor shall submit, together with the asbestos project notification, all applicable asbestos abatement permit construction documents.

- F. The general contractor shall retain a Registered Design Professional to perform the inspections required pursuant to Title 28 of the Administrative Code, including but not limited to special inspections required by Chapter 17 of the Building Code, as follows:
 - 1. A final inspection shall be performed by a registered design professional retained by the general contractor after all work authorized by the asbestos abatement permit is completed. The person performing the inspection shall note all failures to comply with the provisions of the Building Code or approved asbestos abatement permit and shall promptly notify the owner in writing. All defects noted in such inspection shall be corrected. The final inspection report shall either:
 - a. Confirm:
 - (1) That the construction work is complete, including the reinstallation or reactivation of any building fire safety or life safety component.
 - (2) That any defects previously noted have been corrected.
 - (3) That all required inspections were performed.
 - (4) That the work is in substantial compliance with the approved asbestos abatement permit construction documents, the Building Code, and other applicable laws and rules.

 - b. Confirm:
 - (1) That the construction work does not return the building (or portion thereof) affected by the abatement project to a condition compliant with the building code and other applicable laws and rules, but that the registered design professional has reviewed an application for asbestos abatement permit construction documents approval that has been approved by the department of buildings, and the subsequent scope of work as approved will, upon completion, render all areas affected by the asbestos project in full compliance with the building code and all applicable laws and rules.



- (2) That any defects previously noted that are not addressed by the subsequent scope of work as approved by the department of buildings, have been corrected.
 - (3) That all required inspections that are not addressed by the subsequent scope of work as approved by the department of buildings were performed.
 - (4) That all completed work pursuant to an asbestos abatement permit is in substantial compliance with the approved asbestos abatement permit construction documents.
- G. The Registered Design Professional shall provide the final inspection reports to be filed with DEP on A-TR1 form. Records of final inspections made by registered design professionals shall be submitted to DDC as part of the close out document package.
- H. Erect bilingual (English-Spanish) warning signs around the work space and at every point of potential entry from the outside and at main entrance to building which can be viewed by the public without obstruction, in accordance with OSHA 29 CFR 1926.1101 (K) (Sign Specifications) and Title 15, Chapter 1 of RCNY. The warning signs shall be a bright color so that they will be easily noticeable. The size of the sign and the size of the lettering shall be no less than OSHA requirements.
- I. Provide the required labels for all polyethylene bags and all drums utilized to transport contaminated material to the landfill in accordance with OSHA 29 CFR 1926.1101 (K)(2) and by 49 CFR Parts 171 and 172 of the Department of Transportation regulations.
- J. Provide any other signs, labels, warnings, and posted instructions that are necessary to protect, inform and warn people of the hazard from asbestos exposure. Post in a prominent and convenient place for the workers a copy of the latest applicable regulations from OSHA, EPA, NIOSH, State of New York and New York City and any additional items mandated for posting by the aforementioned regulations.
- K. Furnish all permits, variances and notices required to perform the Work.

1.08 EMERGENCY PRECAUTIONS

- A. Establish emergency and fire exits from the Work Area. The clean side of all emergency exits shall be equipped with two full sets of protective clothing and respirators at all times.



- B. Notify local medical emergency personnel, both ambulance crews and hospital emergency room staff prior to commencement of abatement operations as to the possibility of having to handle contaminated or injured workmen.
- C. Prepare to administer first aid to injured personnel after decontamination. Seriously injured personnel shall be treated immediately or evacuated immediately for decontamination. When an injury occurs, precautions shall be taken to reduce airborne fiber concentrations (i.e., misting of the air with water) until the injured person has been removed from the Work Area.
- D. Notify, before actual removal of the asbestos material, the local police and fire departments to the danger of entering the Work Area. Asbestos abatement contractor shall make every effort to help these agencies form plans of action should their personnel need to enter the contaminated area.

1.09 SUBMITTALS

- A. Pre-Construction Submittals:
 - 1. Attend a pre-construction meeting scheduled by the Department. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project Manager. At this meeting, the asbestos abatement contractor shall present three copies of the following items, bound and indexed. The detailed plan of action must be submitted at least five (5) days prior to the pre-construction meeting.
 - a. Asbestos abatement contractor's scope of work, work plan and schedule.
 - b. Asbestos project notifications, approved variances and plans to Government Agencies.
 - c. Copies of Permits, clearance and licenses if required.
 - d. Schedules: the asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. Asbestos abatement contractor shall post a copy of all schedules at the site:
 - (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of



refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.

- (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.
 - (4) A schedule of equipment to be used including numbers and types of all major equipment such as HEPA Air Filtration Units, HEPA-vacuums, airless sprayers, Water Atomizing Devices and Type "C" compressors.
- e. A written plan and shop drawings for preparation of work site and decontamination chamber.
 - f. Description of protective clothing and approved respirator to be used, make, model, NIOSH approval numbers.
 - g. Delineation of responsibility of work site supervision, including competent person, with names, resumes, and home telephone numbers.
 - h. Explanation of decontamination sequence and isolation techniques.
 - i. Description of specific equipment to be utilized, including make and model number of air filtration devices, vacuums, sprayers, etc.
 - j. Description of any prepared methods, procedures, techniques, or equipment other than those specified in the Contract Documents.
 - k. Explanation of the handling of asbestos contaminated wastes including EPA and NYCDEC identification numbers of Waste Hauler.
 - l. Description of the final clean-up procedures to be used.
 - m. Name and qualifications of asbestos abatement contractor's Air Monitor including AIHA accreditation, and proof of NIOSH PAT and NIST/NVLAP Bulk Quality Assurance Proficiency of OSHA samples for approval by the City of New York Department of Design and Construction.



- n. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.
- o. Safety Data Sheets (SDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until SDS are reviewed.
- p. Worker Training and Medical Surveillance: Asbestos abatement contractor shall submit a list of the NYSDOL and NYCDEP Asbestos supervisors and handlers who will work on this project. Present evidence that workers have received proper training required by the regulations and required by OSHA 29 CFR 1926.1101 (Asbestos Standard) and 1926.1200 (HAZCOM standard) and any other standards applicable to the work.
- q. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
 - (1) The asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain all information specified in ICR56-3.4 (a)(2)(i).
 - (2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the Asbestos abatement contractor shall submit a copy of the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.
 - (3) Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.



- B. During Construction Submittals:
Submit copies of the following items to the Construction Project Manager during the work:
1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.
 2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
 3. Floor plans indicating asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager at weekly progress meetings.
 4. All asbestos abatement contractors' air monitoring and inspection results.
- C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from asbestos abatement contractor, Sub-asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,
3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.



8. Project Record: The asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall consist of:
 - a. Copies of licenses of all asbestos abatement contractors involved in the project;
 - b. Copies of DEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
 - c. Copies of all project notifications and reports filed with DEP, NYSDOL and EPA for the project, with any amendments or variances;
 - d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
 - e. A copy of the air sampling log and all air sampling results;
 - f. A copy of the abatement asbestos abatement contractor's daily log book;
 - g. All data related to bulk sampling including the results of any asbestos surveys performed by an asbestos investigator;
 - h. Copies of all asbestos waste manifests;
 - i. A copy of all Project Monitor's Reports (ACP-15).
 - j. A copy of each ATR-1 Form completed for the asbestos project (if required).
 - k. A copy of each Asbestos Project Conditional Closeout Report (ACP-20).
 - l. A copy of the Asbestos Project Completion Form (ACP-21).
 - m. A copy of the project record shall be submitted to DDC and its Third Party Air Monitor within 48 hours of the Issuance of the ACP-21 form, as part of the close out documents.
9. The asbestos abatement contractor shall submit one of the following certifications to the general contractor, with a copy provided to DDC:



- a. Asbestos Project Completion Form. If an asbestos project has been performed, a copy of the asbestos project completion form issued by DEP shall be submitted to DOB, with a copy being provided to DDC, prior to the issuance of a DOB permit and to any amendment of the underlying construction document approval which increases the scope of the project to include (a) work area(s) not previously covered.
- b. An Asbestos Project Conditional Close-out Form. If an asbestos project has been performed a copy of the asbestos project conditional close-out form issued by DEP shall be submitted to DOB, with a copy being provided to DDC, prior to the issuance of a DOB permit and to any amendment of the underlying construction document approval which increases the scope of the project to include (a) work area(s) not previously covered.

1.10 QUALITY ASSURANCE

- A. All work required for the completion of this project or called for in this Specification must be executed in a workmanlike manner by using the appropriate methods established by regulatory requirements and/or industrial standards. All workmanship or work methods are subject to review and acceptance by the Construction Project Manager. Throughout the Specification, reference is made to codes and standards which establish qualities, levels or types of workmanship which will be considered acceptable. It is the asbestos abatement contractor's responsibility to comply with these codes and standards during the execution of this work.
- B. All materials and equipment required or consumed during the work of this Contract must meet the minimum acceptable criteria established by codes and standards referenced elsewhere in this Specification. Materials and equipment must be submitted for prior approval to the DDC project manager as part of the asbestos abatement contractor's "Shop Drawings".
- C. It is the asbestos abatement contractor's responsibility, when so required by the Specification or upon written request from the Commissioner or his representative to furnish all required proof that workmanship, materials and/or equipment meet or exceed the codes and standards referenced. Such proof shall be in the form requested, typically a certified report or test conducted by a testing entity approved for that purpose by DDC.
- D. The asbestos abatement contractor shall furnish proof that employees working under his supervision have had instruction on the dangers of asbestos exposure, on respirator use, decontamination, and OSHA regulations. This proof shall be in the form of a notarized affidavit to the effect that the above requirements have been



satisfied and a copy of the Job Hazard Analysis (JHA) with tool box meeting executed meeting sign in sheet.

- E. The asbestos abatement contractor will have posted and in view at the job site the OSHA regulations 29 CFR 1910.1001, and 1926.1101 Asbestos Standard, and 29 CFR 1926.59 Hazard Communication Standard Environmental Protection Agency 40 CFR, Part 61, subpart B: National Emission Standard for asbestos, asbestos stripping, work practices and disposal of asbestos waste. One copy of NYC Title 15, Chapter 1 of RCNY and NYS DOL ICR 56 at the job site at all times.
- F. Familiarity with Pertinent Codes and Standards: In procuring all items used in this work, it is the asbestos abatement contractor's responsibility to verify the detailed requirements of the specifically named codes and standards and to verify that the items procured for use in this work meet or exceed the specified requirements, and are suitable for their intended use.
- G. Rejection of Non-Complying Items: The Commissioner reserves the right to reject items incorporated into the work that fail to meet the specified minimum requirements. The Commissioner further reserves the right, and without prejudice to other recourse that maybe taken, to accept non-complying items subject to an adjustment in the Contract amount as approved by the City.
- H. Applicable Regulations, Codes and Standards: Applicable standards listed in these Specifications include, but are not necessarily limited to, standards promulgated by the following agencies and organizations:
 - 1. American National Standards Institute (ANSI)
(Successor to USASI and ASA)
25 West 43rd Street (between 5th and 6th Avenue) 4th Floor
New York, NY 10036
212-642-4900
 - 2. American Society for Testing and Materials (ASTM)
100 Bar Harbor Drive
West Conshohocken, PA 19428-2959
610-832-9500
 - 3. National Institute for Occupational Safety and Health (NIOSH)
Robert A. Taft Laboratory
4676 Columbia Pkwy
Mailstop R12 Cincinnati, Ohio 45226
513-841-4428
 - 4. National Electrical Code (NEC)
See NFPA



**Department of
Design and
Construction**

FMS No. CO283TOIL
Issue Date: 03/23/2023

5. National Fire Protection Association (NFPA)
1 Batterymarch Park
Quincy, Massachusetts 02169-7471
617-770-3000
6. New York City Fire Department (FDNY)
9 Metrotech Center
Brooklyn, NY 11201-5431
718-999-2117
7. New York City Department of Buildings (NYC DOB)
Enforcement Division
280 Broadway, New York, New York 10007
212- 566-2850
8. New York City Department of Environmental Protection (NYCDEP)
Bureau of Environmental Compliance
Asbestos Control Program
59-17 Junction Boulevard, 8th Floor
Corona, New York 11368
718-595-3682
9. New York City Department of Health and Mental Hygiene (NYC DOHMH)
Environmental Investigation
125 Worth Street
New York, New York 10013
212-442-3372
10. New York State Department of Labor (NYSDOL)
Division of Safety and Health, Engineering Services Unit
State Office Building Campus
Albany, New York 12240-0010
11. New York City Department of Sanitation
125 Worth Street, Room 714
New York, New York 10013
212-566-1066
12. Occupational Safety and Health Administration (OSHA)
Region II - Regional Office
201 Varick Street, Room 908
New York, New York 10014
212-337-2378



13. United States Environmental Protection Agency (EPA or USEPA)
Region II
Asbestos NESHAPS Contact
Air and Waste Management Division
(Air Compliance Branch) – USEPA
290 Broadway, 21st Floor
New York, New York 10007-1866
212-637-3660

- I. Post all applicable regulations in a conspicuous place at the job site. Assure that the regulations are not altered, defaced or covered by other materials. One copy of each regulation must also be kept at the Asbestos abatement contractor's office.

1.11 CITY/ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

- A. The normal occupants of the Work Areas will be relocated by the City prior to the performance of the abatement work and returned there to at the conclusion of the abatement work, at no cost to the asbestos abatement contractor. However, the asbestos abatement contractor shall protect all furniture and equipment in the Work Areas in a manner as hereinafter specified. In addition, the asbestos abatement contractor shall perform the work of this Contract in a manner that will be least disruptive to the normal use of the non-Work Areas in the building.
- B. Asbestos abatement contractor shall be responsible for cleaning all portable items not specifically addressed by the Facility, in the Work Areas, or dispose of same as asbestos contaminated waste.
- C. Facility to provide asbestos abatement contractor with a list of items that cannot be removed and need special attention.
- D. Facility to stop all deliveries that may be scheduled to the Work Area while work is in progress.
- E. Facilities to have authorized personnel on site at all times or supply the asbestos abatement contractor with means of contacting such personnel without unreasonable delay. Such personnel shall have access to all areas, have knowledge of electrical, and air handling equipment. Such personnel shall assist the asbestos abatement contractor in case of any power failure or breakdown to shut down air supply systems, to reset and control all protective systems such as alarms, sprinklers, locks, etc. The Facility shall ensure no active air handling systems are operating within the Work Area.
- F. City will not occupy the portions of the building, in which work is being performed during the entire asbestos removal operation, including completion of clean up.



- G. Asbestos abatement contractor shall provide a plan for 24 hour job security both for prevention of theft and for barring entry of curious but unprotected personnel into Work Areas, as required by the Department.
- H. Asbestos abatement contractor shall provide surveillance by a fire watch and set forth procedures to be taken for the safety of building occupants in the event of an emergency, in accordance with the WPSP and DEP regulations.
- I. Should the failure of any utility occur, the City will not be responsible to the asbestos abatement contractor for loss of time or any other expense incurred.
- J. Facility will be responsible to notify the asbestos abatement contractor of any planned electrical power shutdowns in order to ensure that there are no power interruptions in the negative air pressure systems.
- K. Asbestos abatement contractor shall remove all flammable materials from the work area and all sources of ignition (including but not limited to pilot lights) shall be extinguished.
- L. Asbestos abatement contractor shall require a competent person (as defined in OSHA 1926.1101) to perform the following functions and to be on-site continuously for the duration of the project:
 - 1. Monitor the set up of the Work Area enclosure and ensure its integrity.
 - 2. Control entry and exit into the work enclosure.
 - 3. Ensure that employees are adequately trained in the use of engineering controls, proper work practices, proper personal protective equipment and in decontamination procedures.
 - 4. Ensure that employees use proper engineering controls, proper work practices, proper personal protective equipment and proper decontamination procedures.
 - 5. The competent person (as defined in OSHA1926.1101) shall check for rips and tears in work suits, and ensure that they are mended immediately or replaced.

1.12 USE OF BUILDING FACILITIES

- A. City shall make available to the asbestos abatement contractor, from existing outlets and supplies, all reasonably required amounts of water and electric power at no charge.



- B. Electric power to all Work Areas shall be shut down and locked out except for electrical equipment that must remain in service. Safe temporary power and lighting shall be provided by asbestos abatement contractor in accordance with applicable codes. All power to Work Areas shall be brought in from outside the area through ground-fault interrupter circuits installed at the source. Stationary electrical equipment within the Work Area, which must remain in service, shall be adequately protected, enclosed and ventilated. The Facility will identify all electric lines that must remain in service. Asbestos abatement contractor shall protect all lines.
- C. Asbestos abatement contractor shall provide, at his own expense, all electrical, water, and waste connections, tie-ins, extensions, and construction materials, supplies, etc. All water tie-ins shall be hard piped with polyethylene or copper piping. At the end of each shift, asbestos abatement contractor shall disconnect all hoses within the work zone and place in equipment room of the worker decontamination unit. Asbestos abatement contractor shall ensure positive shutoff of all water to Work Area during non-working hours.
- D. Utilities:
1. General:
All temporary facilities required to be installed, shall be subject to the approval of the Commissioner. Prior to starting the work at any site; specify clearly the temporary locations of facilities preferably with sketches and submit the same to the Construction Project Manager for approval.
 2. Water:
The Department of Design and Construction will furnish all water needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. All temporary plumbing or adaptations to supply the needs of the Work Area shall be installed and removed by the asbestos abatement contractor and the cost thereof included in the Lump Sum price for abatement work. Shower water for the decontamination unit shall be provided hot. Heating of water, if necessary, shall be provided by the asbestos abatement contractor.
 3. Electricity:
The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the asbestos abatement contractor in buildings under their jurisdiction. All temporary electrical work or adaptations to supply the needs of the Work Area shall be installed and removed by the asbestos abatement contractor and the cost thereof included in the Lump Sum price for abatement work.



In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the asbestos abatement contractor. However, it is the asbestos abatement contractor's (or the General contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

A dedicated power supply for the negative pressure ventilating units shall be utilized. The negative air equipment shall be on a ground fault circuit interrupter (GFCI) protected circuit separate from the remainder of the work area temporary power circuits.

- E. Asbestos abatement contractor shall shut down and lock out all electric power to all work areas except for electrical equipment that must remain in service. Safe temporary power and lighting shall be provided in accordance with all applicable codes. Existing light sources (e.g., house lights) shall not be utilized. All power to work areas shall be brought in from outside the area through ground-fault circuit interrupter at the source.
 - 1. If electrical circuits, machinery, and other electrical systems in or passing through the work area must stay in operation due to health and safety requirements, the following precautions must be taken:
 - a. All unprotected cables, except low-voltage (less than 24 volts) communication and control system cables, panel boxes of cables and joints in live conduit that run through the work area shall be covered with three (3) independent layers of six (6) mil fire retardant polyethylene. Each layer shall be individually duct taped and sealed. All three (3) layers of polyethylene sheeting shall be left in place until satisfactory clearance air sampling results have been obtained.
 - b. Any energized circuits remaining in the work area shall be posted with a minimum two (2) inch high lettering warning sign which reads: DANGER LIVE ELECTRICAL - KEEP CLEAR. A sign shall be placed on all live covered barriers at a maximum of ten (10) foot intervals. These signs shall be posted in sufficient numbers to warn all persons authorized to enter the work area of the existence of the energized circuits.
 - 2. Any source of emergency lighting which is temporarily blocked as a result of work place preparation shall be replaced for the duration of the project by battery operated or temporary exit signs, exit lights, or photo luminescent path markings.



- F. Asbestos abatement contractor shall provide a separate temporary electric panel board to power asbestos abatement contractor's equipment. The Facility will designate an existing electrical source in proximity to the Work Area. Asbestos abatement contractor's licensed electrician shall provide temporary tie-in via cable, outlet boxes, junction boxes, receptacles and lights, all with ground fault interruption. At no time shall extension cords greater than 50-feet in length be allowed. All temporary electrical installation shall be in accordance with OSHA regulations. The electric shut down for power panel tie-in will be on off-hours and must be coordinated with the Facility. Asbestos abatement contractor shall provide to the City a specification and drawing outlining his power requirements at the pre-construction meeting.
- G. Additional electrical equipment (i.e., transformers, etc.), which is necessary due to the lack of existing power on the floor, shall be at the asbestos abatement contractor's expense.
- H. Asbestos abatement contractor shall provide fire protection in accordance with all State and Local fire codes.
- I. Sprinklers, standpipes, and other fire suppression systems shall remain in service and shall not be plasticized.
- J. When temporary service lines are no longer required, they shall be removed by the asbestos abatement contractor. Any parts of the permanent service lines, grounds and buildings, disturbed or damaged by the installation and/or removal of the temporary service lines, shall be restored to their original condition by asbestos abatement contractor. Senior Stationary Engineer will inspect and test all switches, controls, gauges, etc. and shall submit a list to the Construction Project Manager of any equipment damaged by the asbestos abatement contractor.
- K. Asbestos abatement contractor shall supply hot shower water necessary for use in the decontamination unit.

1.13 USE OF THE PREMISES

- A. Asbestos abatement contractor shall confine his apparatus, the storage of materials, and supplies, and the operation of his workmen to limits established by law, ordinances, and the directions of the Construction Project Manager and the Facility. All flammable or combustible materials shall be properly stored to obviate fire and in areas approved by the Facility.
- B. Asbestos abatement contractor shall assure that no exits from the building are obstructed, that appropriate safety barriers are established to prevent access, and that Work Areas are kept neat, clean, and safe.



- C. Asbestos abatement contractor shall maintain exits from the work area or alternative exits shall be established, in accordance with section 1027 of the New York City Fire Code. Exits shall be checked at the beginning and end of each work shift against blockage or impediments to exiting.
- D. If the openings of temporary structural partitions related to abatement work areas block egress, the partition shall consist of two sheets of fire retardant 6-mil plastic, prominently marked as an exit with photo luminescent paint or signage. Cutting tools (e.g., knife, razor) shall be attached to the work area side of the sheeting for use in the event that the barrier must be cut open to allow egress.
- E. All surrounding work, fixtures, soil lines, drains, water lines, gas pipes, electrical conduit, wires, utilities, duct work railings, shrubbery, landscaping, etc. which are to remain in place shall be carefully protected and, if disturbed or damaged, shall be repaired or replaced as directed by the City, at no additional cost.
- F. All routes through the building to be used by the asbestos abatement contractor shall first be approved by the Construction Project Manager and the Facility.
- G. Attention is specifically drawn to the fact that other asbestos abatement contractors, performing the work of other Contracts, may be (or are) brought upon any of the work sites of this Contract. Therefore, the asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other asbestos abatement contractors who may be on (or are on) any site of the work of this Contract. Regulated area exempted.
- H. Temporary toilet facilities must be provided by the asbestos abatement contractor on the site. Coordinate location of facilities with Construction Project Manager. No toilet facilities will be allowed in the Work Area.

1.14 PROTECTION AND DAMAGE

- A. The asbestos abatement contractor is responsible to cover all furniture and equipment that cannot be removed from Work Areas. Moveable furniture and equipment will be removed from Work Areas by asbestos abatement contractor prior to start of work and returned upon successful completion of the final air testing. At the conclusion of the work (after clearance level of air testing reaches the acceptable limit), the asbestos abatement contractor will remove all plastic covering from the walls, floors, furniture, equipment and reinstall furniture and equipment in the cleaned Work Area. The asbestos abatement contractor shall remove all shades, curtains and drapes from the Work Area, and reinstall the same following the final clean up.



- B. Prior to plasticizing, the proposed work areas shall be pre-cleaned using HEPA filtered vacuum equipment and/or wet cleaning methods. Methods that raise dust, such as sweeping or vacuuming with equipment not equipped with HEPA filters, are prohibited.
- C. Use rubber tired vehicles that use non-volatile fuels for conveying material inside building and provide temporary covering, as necessary, to protect floors.
- D. No materials or debris shall be thrown from windows or doors of the building. Building waste management system shall NOT be used to remove any asbestos waste from the building.
- E. Debris shall be removed from the work site daily. Premises shall be left neat and clean after each work shift, so that work may proceed the next regular workday without interruption. Limited bag storage may take place within the Work Area when approved by the Construction Project Manager.
- F. Protect floors and walls along removal routes from damage, wear and staining with contamination control flooring. All finished surfaces to be protected with Masonite or other rigid sheathing material.
- G. A preliminary inspection for pre-existing damage shall be conducted by asbestos abatement contractor and representative of the City before commencement of the project.

1.15 RESPIRATORY PROTECTION REQUIREMENTS

- A. Respiratory protection shall be worn by all individuals who may be exposed to asbestos fibers from the initiation of the asbestos project until all areas have successfully passed clearance air monitoring in accordance with Regulations and these Specifications.
- B. Asbestos abatement contractor shall develop and implement a written respiratory protection program with required site-specific procedures and elements. The program shall be administered by a properly trained individual. The written respiratory protection program shall include the requirements set forth in OSHA Standard 29 CFR 1910.134, at a minimum.
- C. The Asbestos abatement contractor shall provide workers with individually issued and marked respiratory equipment. Respiratory equipment shall be suitable for the asbestos exposure level(s) in the Work Area(s), as specified in OSHA Standards 26 CFR 1910.134 and 29 CFR 1926.1101, NIOSH Standard 42 CFR 84, or as more stringently specified otherwise, herein.



- D. Where respirators with disposable filter parts are employed, the asbestos abatement contractor will provide sufficient filter parts for replacement as necessary or as required by the applicable regulation.
- E. All respiratory protection shall be NIOSH approved. All respiratory protection shall be provided by asbestos abatement contractor, and used by workers in conjunction with the written respiratory protection program.
- F. Asbestos abatement contractor shall provide respirators selected by an Industrial Hygienist that meet the following requirements:

Table 1. -- Assigned Protection Factors⁵

Type of Respirator ^{1,2}	Half mask	Full facepiece	Helmet/hood
1. Air-Purifying Respirator	³ 10	50
2. Powered Air-Purifying Respirator (PAPR)	50	1,000	⁴ 25/1,000
3. Supplied-Air Respirator (SAR) or Airline Respirator			
• Demand mode	10	50
• Continuous flow mode	50	1,000	⁴ 25/1,000
• Pressure-demand or other positive-pressure mode	50	1,000
4. Self-Contained Breathing Apparatus (SCBA)			
• Demand mode	10	50	50
• Pressure-demand or other positive-pressure mode (e.g., open/closed circuit)	10,000	10,000

¹Employers may select respirators assigned for use in higher workplace concentrations of a hazardous substance for use at lower concentrations of that substance, or when required respirator use is independent of concentration.

²The assigned protection factors in Table 1 are only effective when the employer implements a continuing, effective respirator program as required by this section (29 CFR 1910.134), including training, fit testing, maintenance, and use requirements.

³This APF category includes filtering facepieces, and half masks with elastomeric facepieces.

⁴The employer must have evidence provided by the respirator manufacturer that testing of these respirators demonstrates performance at a level of protection of 1,000 or greater to receive an APF of 1,000. This level of performance can best be demonstrated by performing a WPF or SWPF study or equivalent testing. Absent such testing, all other PAPRs and SARs with helmets/hoods are to be treated as loose-fitting facepiece respirators, and receive an APF of 25.

⁵These APFs do not apply to respirators used solely for escape. For escape respirators used in association with specific substances covered by 29 CFR 1910 subpart Z, employers must refer to the appropriate substance-specific standards in that subpart. Escape respirators for other IDLH atmospheres are specified by 29 CFR 1910.134 (d)(2)(ii).

- G. Selection of high efficiency filters:
 - 1. All high efficiency filters shall have a nominal efficiency rating of 100 (99.97-percent effective) when tested against 0.3-micrometer monodisperse diethyl-hexyl phthalate (DOP) particles.
 - 2. Choose N-, R-, or P-series filters based upon the presence or absence of oil particles.
 - a. N-series filters shall only be used for non-oil solid and water based aerosols or fumes.



- b. R- and P-series filters shall be used when oil aerosols or fumes (i.e., lubricants, cutting fluids, glycerin, etc.) are present. The R-series filters are oil resistant and the P-series filters are oil proof.
 - c. Follow filter manufacture recommendations.
 - 3. If a vapor hazard exists, use an organic vapor cartridge in combination with the high efficiency filter.
- H. Historical airborne fiber level data may serve as the basis for selection of the level of respiratory protection to be used for an abatement task. Historical data provided by the asbestos abatement contractor shall be based on personal air monitoring performed during work operations closely resembling the processes, type of material, control methods, work practices, and environmental conditions present at the site. Documentation of aforementioned results may be requested by the City and/or Third-Party Air Monitor for review. This will not relieve the asbestos abatement contractor from providing personal air monitoring to determine the time-weighted average (TWA) for the work under contract. The TWA shall be determined in accordance with 29 CFR 1926.1101.
- I. At no time during actual removal operations shall half-mask air purifying respirators be allowed unless a full 8-hour TWA and excursion limit have been conducted, and reviewed by the Construction Project Manager. If the TWA and excursion limit have not been conducted, a Supplied-Air Respirator (SAR) or Airline Respirator or Self-Contained Breathing Apparatus (SCBA) must be used. Use of single use dust respirators is prohibited for the above respiratory protection.
- J. Workers shall be provided with personally issued and individually marked respirators. Respirators shall not be marked with any equipment that will alter the fit of the respirator in any way. Only waterproof identification markers shall be used.
- K. Asbestos abatement contractor shall ensure that the workers are qualitatively or quantitatively fit tested by an Industrial Hygienist initially and every 12 months thereafter with the type of respirator he/she will be using.
- L. Whenever the respirator design permits, workers shall perform the positive and negative air pressure fit test each time a respirator is worn. Powered air-purifying respirators shall be tested for adequate flow as specified by the manufacturer.
- M. No facial hairs (beards) shall be permitted to be worn when wearing respiratory protection that requires a mask-to-face seal.
- N. If a worker wears glasses, a spectacle kit to fit their respirator shall be provided by the asbestos abatement contractor at the asbestos abatement contractor's expense.



- O. Respiratory protection maintenance and decontamination procedures shall meet the following requirements:
1. Respiratory protection shall be inspected and decontaminated on a daily basis in accordance with OSHA 29 CFR 1910.134 (b); and
 2. High efficiency filters for negative pressure respirators shall be changed after each shower; and
 3. Respiratory protection shall be the last piece of worker protection equipment to be removed. Workers must wear respirators in the shower when going through decontamination procedures as stated in Section 3.03 and/or 3.04.
 4. Airline respirators with high efficiency filtered disconnect shall be disconnected in the equipment room and worn into the shower. Powered air-purifying respirator face pieces shall be worn into the shower. Filtered/power pack assemblies shall be decontaminated in accordance with manufacturers recommendations; and
 5. Respirators shall be stored in a dry place and in such a manner that the face-piece and exhalation valves are not distorted; and
 6. Organic solvents shall not be used for washing of respirators.
- P. Authorized visitors shall be provided with suitable respirators and instruction on the proper use of respirators whenever entering the Work Area. Qualitative fit test shall be done to ensure proper fit of respirator.

1.16 PROTECTIVE CLOTHING

- A. Provide worker protection as required by the most stringent OSHA and/or EPA standards applicable to the work. Provide to all workers, foremen, superintendents, authorized visitors and inspectors, protective disposable clothing consisting of full body coveralls, head covers, gloves and 18-inch high boot type covers or reusable footwear.
- B. In addition to personal protective equipment for workers, the asbestos abatement contractor shall make available at each worksite at least four (4) additional uniforms and required respiratory equipment each day for personnel who are authorized to inspect the work site. He/she shall also provide, for the duration of the work at any site involving a decontamination unit for worksite access, a lockable storage locker for use by the Construction Project Manager. In addition to respiratory masks for workers, the asbestos abatement contractor must have on hand at the beginning of each work day, at least four (4) masks each with three sets of fresh filters, for use by personnel who are authorized to inspect the worksite and



are medically qualified to don a respirator. The asbestos abatement contractor shall check for proper fit of the respirators of all City personnel authorized to enter the Work Area.

- C. Asbestos handlers involved in tent procedures shall wear two (2) disposable suits, including gloves, hood and footwear, and appropriate respiratory equipment. All street clothes shall be removed and stored in a clean room within the work site. The double layer personal protective equipment shall be used for installation of the tent and throughout the procedure, if a decontamination unit (with shower and clean room) is contiguous to the Work Area, only one (1) layer of disposable personal protective equipment shall be required; in this case, prior to exiting the tent the worker shall HEPA vacuum and wet clean the disposable suit.
- D. The outer disposable suit (if 2 suits are worn) shall be removed and remain in the tent upon exiting. Following the tent disposal and work site clean up the workers shall immediately proceed to a shower at the work site. The inner disposal unit and respirator shall be removed in the shower after appropriate wetting. The disposal clothing shall be disposed of as asbestos-containing waste material. The workers shall then fully and vigorously shower with supplied liquid bath soap, shampoo, and clean dry towels.
- E. Coveralls: provide disposable full-body coveralls and disposable head covers. Require that they be worn by all workers in the Work Area. Provide a sufficient number for all required changes for all workers in the Work Area.
- F. Boots: provide work boots with non-skid soles, and where required by OSHA, foot protection, for all workers. Provide boots at no cost to workers. Paint uppers of all boots yellow with waterproof enamel. Do not allow boots to be removed from the Work Area for any reason after being contaminated with ACM and/or dust.
- G. Hard Hats: provide hard hats as required by OSHA for all workers, and provide a minimum of four spares for Inspectors, visitors, etc. Label all hats with same warning label as used on disposal bags. Require hard hats to be worn at all times that work is in progress that may cause potential head injury. Provide hard hats of the type with polyethylene strap suspension. Require hats to remain in the Work Area throughout the work. Thoroughly clean and decontaminate and bag hard hats prior to removing them from the Work Area at the end of the work.
- H. Goggles: provide eye protection (goggles) as required by OSHA for all workers involved in any activity that may potentially cause eye injury. Require them to be worn at all times during these activities. Thoroughly clean and decontaminate goggles before removing them from the Work Area.



- I. Gloves: provide work gloves to all workers, of the type dictated by the Work and OSHA Standards. Do not remove gloves from the Work Area. Dispose of as asbestos contaminated waste at the end of the work. Gloves shall be worn at all times, except during Work Area Preparation activities that do not disturb ACM.
- J. Reusable footwear, hard hats and eye protection devices shall be left in the contaminated Equipment Room until the end of the Asbestos Abatement Work.
- K. Disposable protective clothing shall be discarded and disposed of as asbestos waste every time the wearer exits from the workspace to the outside through the decontamination facility.
- L. Adequate supplies of disposable coveralls, head covers and foot covers shall be maintained by the asbestos abatement contractor for authorized representatives who may inspect the Work Area.

1.17 AIR MONITORING - ASBESTOS ABATEMENT CONTRACTOR

- A. Asbestos abatement contractor shall employ a qualified industrial hygiene firm to conduct OSHA personal exposure monitoring air samples in accordance with OSHA Regulations, 1926.1101 (Asbestos Standards for Construction) to establish representative full shift monitoring data, per task, to determine respiratory protection. The asbestos abatement contractor may submit representative Personal exposure monitoring data for a project of similar size and complexity in lieu of performing monitoring in accordance with OSHA 29CFR 1926.1101.
- B. The asbestos abatement contractor shall ensure that a qualified industrial hygiene laboratory for OSHA personal exposure monitoring is utilized. Such laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).
- C. Sampling and analysis methods shall be per NIOSH 7400A.
- D. Test Reports:
 - 1. Promptly process and distribute one copy of the test results, to the Commissioner via email.
 - 2. Prompt reports are necessary so that if required, modifications to work methods and/or practices may be implemented as soon as possible.
 - 3. Asbestos abatement contractor shall post the personal exposure monitoring results at the jobsite within 24 hours of receipt of the results.



- E. Competent person shall conduct inspections and provide written reports daily. Inspections will include checking the standard operating procedures, engineering control systems, respiratory protection and decontamination systems, packaging and disposal of asbestos waste, and any other aspects of the project which may affect the health and safety of the people and environment.
- F. All costs for required the asbestos abatement contractor's air monitoring shall be borne by the asbestos abatement contractor.
- G. The City reserves the right to conduct air and surface dust sampling in conjunction with and separate from the Third-Party Air Monitor for the purposes of Quality Assurance.

1.18 THIRD PARTY MONITORING AND LABORATORY

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM). This laboratory shall meet the standards stated in Paragraph 1.17. B.
- C. Observations will include, but not be limited to, checking the standard operating procedures, engineering control systems, respiratory protection, decontamination systems, packaging and disposal of asbestos waste, and any other aspects of the project that may affect the health and safety of the environment, Asbestos abatement contractor, and/or facility occupants.
- D. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.
- E. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the Asbestos abatement contractor.
- F. At a minimum, air sampling shall be conducted in accordance with the following schedule:



Abatement Activity	Pre-Abatement	During Abatement	Post- Abatement
Equal to or greater than 10,000 square feet or 10,000 linear feet of ACM	PCM	PCM	TEM
Less than 10,000 square feet or 10,000 linear feet of ACM	PCM	PCM	PCM

Note: TEM is acceptable wherever PCM is required.

G. The number of air samples required per stage of abatement and size of abatement project is listed in the table below:

		Pre-Abatement	During Abatement	Post Abatement
Large Asbestos Projects				
1.	Full Containment	10	5	10
2.	Glovebag inside Tent	5 ^a	5 ^a	5 ^a
3.	Exterior Foam and Vertical Surfaces	-	5 ^c	5 ^d
4.	Interior Foam	10	5 ^c	10 ^d
Small Asbestos Projects				
1.	Full Containment	6	3	6
2.	Glovebag inside Tent	3 ^b	3 ^b	3 ^b
3.	Tent	3 ^b	3 ^b	3 ^b
4.	Exterior Foam and Vertical Surfaces	-	3 ^c	3 ^d
5.	Interior Foam	6	3 ^c	6 ^d
Minor Projects				
1.	Glovebag inside Tent	-	-	1 ^d
2.	Tent	-	-	1 ^d
3.	Exterior Foam and Vertical Surfaces	-	-	1 ^d
4.	Interior Foam	-	-	1 ^d

^aif more than three (3) tents then two (2) samples required per enclosure.

^bif more than three (3) tents then one (1) sample required per enclosure.

^csamples shall be taken within the work area(s).

^darea sampling is required only if:

- visible emissions are detected during the project
- during-abatement area sampling results exceeded 0.01 f/cc or the pre-abatement area sampling result(s) for interior projects where applicable.
- work area to be reoccupied is an interior space at a school, healthcare, or daycare facility.

H. Prior to commencement of abatement activities, the Third Party Air Monitoring Firm will collect a minimum number of area samples inside each homogeneous work area.

1. Samples will be taken during normal occupancy activities and circumstances at the work site.



2. Samplers shall be located within the proposed work area and at all proposed isolation barrier locations.
 3. Samples shall be analyzed using PCM.
 4. The number of samples to be collected will be determined by the size of the project and the abatement methods to be utilized.
- I. Frequency and duration of the air sampling during abatement shall be representative of the actual conditions during the abatement. The size of the asbestos project will be a factor in the number of samples required to monitor the abatement activities. The following minimum schedule of samples shall be required daily.
1. For large asbestos projects employing full containment, area air sampling shall be performed at the following locations:
 - a. Two area samples outside the work area in uncontaminated areas of the building, remote from the decontamination facilities.
 - (1) Primary location selection shall be within 10 feet of isolation barriers.
 - (2) Where negative ventilation exhaust runs through uncontaminated building areas, one of the area samples will be required in these areas to monitor any potential fiber release.
 - (3) Where exhaust tubes have been grouped together in banks of up to five (5) tubes, with each tube exhausting separately and the bank of tubes terminating together at the same controlled area, one area air sample shall be taken.
 - b. One area sample within the uncontaminated entrance to each decontamination enclosure system.
 - c. Where adjacent non-work areas do not exist, an exterior area sample shall be taken.
 - d. One area sample within 5 feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors but not within a duct.
 - e. One area sample outside, but within 25 feet of, the building or structure, if the entire building or structure is the work area.



2. For large asbestos projects involving interior foam method, area air sampling shall be performed at the following sampling locations:
 - a. One area sample taken outside the work area within 10 feet of isolation barriers.
 - b. One area sample taken within the uncontaminated entrance to each worker decontamination and waste decontamination enclosure system.
 - c. One area sample within 5 feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors but not within a duct, if applicable.
 - d. Three area samples inside the work area.
 - e. One area sample where the negative ventilation exhaust ducting runs through uncontaminated building areas, if applicable.
3. For large asbestos projects employing the glovebag procedure within a tent, a minimum of five continuous air samples shall be taken concurrently with the abatement for each work area, unless there are more than three enclosures, in which case two area samples per enclosure are required.
 - a. Four area samples taken outside the work area within ten feet of tent enclosure(s).
 - b. One area sample taken within the uncontaminated entrance to each worker and waste decontamination enclosure system.
 - c. One area sample within five feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors, but not within a duct, if applicable.
 - d. One area sample where negative ventilation exhaust ducting runs through uncontaminated building areas, if applicable.
4. For large asbestos projects involving exterior foam method or removal of ACM from vertical surfaces, a minimum of five continuous area samples shall be taken concurrently with the abatement for each work area using the following minimum requirements:
 - a. Three area samples inside the work area and remote from the decontamination systems.



- b. One area sample within the uncontaminated entrance to each worker and waste decontamination enclosure system.
 - c. One area sample outside the work area within 25 feet of the building or structure, if the entire building or structure is the work area.
 - d. One area sample inside the building or structure at the egress point to the work area, if applicable.
 5. For small asbestos projects employing full containment, a minimum of three continuous area samples shall be taken concurrently with the abatement for each work area at the following locations:
 - a. Two area samples taken outside the work area within ten feet of the isolation barriers.
 - b. One area sample within the uncontaminated entrance to each worker or waste decontamination enclosure system.
 - c. One area sample within five feet of the unobstructed exhaust from a negative pressure ventilation system exhausting indoors, but not within a duct, if applicable.
 - d. One area sample where negative ventilation exhaust ducting runs through an uncontaminated building area, if applicable.
 6. Tent Procedures:

For projects involving more than 25 linear feet or 10 square feet, a minimum of three continuous samples shall be taken concurrently throughout abatement.
- J. Post-abatement clearance air monitoring for projects not solely employing glove-bag procedures shall include a minimum number of area samples inside each homogeneous work area and outside each homogeneous work area (five samples inside/five samples outside for Large Projects and three samples inside/three samples outside for Small Projects). In addition to the five sample inside/five sample outside minimum for Large Projects, one additional representative area sample shall be collected inside and outside the work area for every 5,000 square feet above 25,000 square feet of floor space where ACM has been abated.
- K. Post-abatement clearance air monitoring for Small Projects solely employing glove-bag procedures is not required unless one or more of the following events occurs. In such cases, post-abatement clearance air monitoring procedures shall be followed. The events requiring post-abatement clearance air monitoring are:
 1. The integrity of the glove-bag was compromised,



2. Visible emissions are detected outside the glove-bag, and/or
 3. Ambient levels exceed 0.01 f/cc during abatement.
- L. Monitoring requirements for other than post-abatement clearance air monitoring are as follows:
1. The sampling zone for indoor air samples shall be representative of the building occupants' breathing zone.
 2. If possible, outdoor ambient and baseline samplers should be placed about 6 feet above the ground surface in reasonable proximity to the building and away from obstructions and drafts that may unduly affect airflow.
 3. For outdoor samples, if access to electricity and concerns about security dictate a rooftop site, locations near vents and other structures on the roof that would unduly affect airflow shall be avoided.
 4. Air sampling equipment shall not be placed in corners of rooms or near obstructions such as furniture.
 5. Samples shall have a chain of custody record.
- M. Post-abatement clearance air monitoring requirements are as follows:
1. Sampling shall not begin until at least one hour after wet cleaning has been completed and no visible pools of water or condensation remain.
 2. Samplers shall be placed at random around the work area. If the work area contains the number of rooms equivalent to the number of required samples based on floor area, a sampler shall be placed in each room. When the number of rooms is greater than the required number of samples, a representative sample of rooms shall be selected.
 3. The representative samplers placed outside the work area but within the building shall be located to avoid any air that might escape through the isolation barriers and shall be approximately 50 feet from the entrance to the work area, and 25 feet from the isolation barriers.
- N. The following aggressive sampling procedures shall be used within the work area during all clearance air monitoring:
1. Before starting the sampling pumps, use forced air equipment (such as a one horsepower leaf blower) to direct exhaust air against all walls, ceilings, floors, ledges and other surfaces in the work area. This pre-sampling procedure shall take at least five minutes per 1,000 square feet of floor area; then



2. Place a 20-inch diameter fan in the center of the room. Use one fan per 10,000 cubic feet of room space. Place the fan on slow speed and point it toward the ceiling.
3. Start the sampling pumps and sample for the required time or volume.
4. Turn off the pump and then the fan(s) when sampling is completed.
5. Collect a minimum number of area samples inside and outside each homogeneous work area (five inside/five outside samples for Large Projects and three inside/three outside samples for Small Projects). In addition to the minimum for Large Projects, one representative area samples shall be collected inside and outside the work area for every 5,000 square feet above 25,000 square feet of floor space where ACM has been abated.

O. For post-abatement monitoring, area samples shall conform to the following schedule:

Area Samples for Analysis by	Minimum Volume	Flow Rate
PCM	1,800 liters	5 to 15 liters/minute
TEM	1,250 liters	1 to 10 liters/minute

1. Each homogeneous work area that does not meet the clearance criteria shall be thoroughly re-cleaned using wet methods, with the negative pressure ventilation system in operation. New samples shall be collected in the work area as described above. The process shall be repeated until the work site meets the clearance criteria.
2. For an asbestos project with more than one homogeneous work area, the release criterion shall be applied independently to each work area.
3. Should airborne fiber concentrations exceed the clearance criteria, the asbestos abatement contractor shall re-clean the work area utilizing wet wiping and HEPA-vacuumping techniques. Following completion of re-cleaning activities, the Third-Party Air Monitor will perform an observation of the Work Area. If the Third-Party Air Monitor determines that the work was performed in accordance with the specifications, the appropriate settling period will be observed and additional air sampling will be performed.
4. All costs resulting from additional air tests and observations shall be borne by the asbestos abatement contractor. These costs may include, but are not limited to, labor, analysis fees, materials, and expenses.



5. After the area has been found to be in compliance, the asbestos abatement contractor may remove Isolation Barriers and perform final cleaning as specified.

P. Clearance and/or Re-occupancy Criteria:

1. The clearance criteria shall be applied to each homogeneous work area independently.
2. For PCM analysis, the clearance air monitoring shall be considered satisfactory when each of the 5 inside/5 outside samples for Large Projects and/or 3 inside/3 outside samples for Small Projects is less than or equal to 0.01 f/cc or the background concentrations, whichever is greater.
3. For TEM analysis, the clearance air monitoring shall be considered satisfactory when the requirements stated in 40 CFR Part 763, Subpart E, Appendix A, Section IV are met.
4. As soon as the air monitoring tests are completed and analyzed, the Third-Party Air Monitor will send the results of such tests to the City and notify the Asbestos abatement contractor.
5. The asbestos abatement contractor shall initiate the appropriate closeout process in DEP ARTS within 24 hours of the Re-occupancy letter being issued by the Third-Party Air Monitoring Firm. This will allow the Third-Party Air Monitoring Firm to complete and submit the ACP-15 forms for each specific work area.
6. The asbestos abatement contractor shall provide the ACP-20 and ACP-21 forms to the general contractor within 48 hours of receipt by DEP.

1.19 TAMPERING WITH TEST EQUIPMENT

All parties to this Contract are hereby notified that any tampering with testing equipment will be considered an attempt at falsifying reports and records to federal and state agencies and each offense will be prosecuted under applicable state and federal criminal codes to the fullest extent possible.

1.20 GUARANTEE

- A. Work performed in compliance with this Contract shall be guaranteed for a period of one year from the date the completed work is accepted by the City.
- B. The asbestos abatement contractor shall not be held liable for the guarantee where the repair required under the guarantee is a result of obvious abuse or vandalism, as determined by the Commissioner.



- C. The City will notify the asbestos abatement contractor in writing regarding defects in work under the guarantee.

PART 2 – PRODUCTS

2.01 MATERIAL HANDLING

- A. Deliver all materials to the job site in their manufacturer's original container, with the manufacturer's label intact and legible.
 - 1. Maintain packaged materials with seals unbroken and labels intact until time of use.
 - 2. Store all materials on pallets, away from any damp and/or wet surface. Cover materials in order to prevent damage and/or contamination.
 - 3. Promptly remove damaged materials and unsuitable items from the job site, and promptly replace with material meeting the specified requirements, at no additional cost to the City.
- B. The Construction Project Manager may reject as non-complying such material and products that do not bear identification satisfactory to the Construction Project Manager as to manufacturer, grade, quality and other pertinent information.

2.02 MATERIALS

- A. Wetting agents: (Surfactant) shall consist of resin materials in a water base, which have been tested to ensure materials are non-toxic and non-hazardous. Surfactants shall be installed according to the manufacturer's written instructions.
- B. Encapsulants: Liquid material which can be applied to asbestos-containing material which temporarily controls the possible release of asbestos fibers from the material or surface either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the material and binding its components together (penetrating encapsulant). A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but excepting sprinklers, standpipes, and other active elements of the fire suppression system.
- C. During abatement activities, replacement materials shall be stored outside the work area in a manner to prevent contamination. Materials required for the asbestos project (i.e., plastic sheeting, replacement filters, duct tape, etc.) shall be stored to prevent damage or contamination.



- D. Framing Materials and Doors: As required to construct temporary decontamination facilities and isolation barriers. Lumber shall be high grade, new, finished one side and fire retardant.
- E. Fire Retardant Polyethylene Sheeting: minimum uniform thickness of 6-mil. Provide largest size possible to minimize seams. All materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.
- F. Fire Retardant Reinforced Polyethylene Sheeting: For covering floor of decontamination units, provide translucent, nylon reinforced or woven polyethylene laminated, fire retardant polyethylene sheeting. Provide largest size possible to minimize seams, minimum uniform thickness 6-mil. All materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.
- G. Drums: Asbestos-transporting drums, sealable and clearly marked with warning labels as required by OSHA and EPA.
- H. Polyethylene Disposal Bags: Asbestos disposal bags, minimum of fire retardant 6-mil thick. Bags shall be clearly marked with warning labels as required by OSHA and EPA.
- I. Signs: Asbestos warning signs for posting at perimeter of Work Area, as required by OSHA and EPA.
- J. Waste Container Bag Liners and Flexible Trailer Trays: One piece leak-resistant flexible tray with absorbent pad.
- K. Tape: Provide tape which is of high quality with an adhesive that is formulated to aggressively stick to sheet polyethylene.
- L. Spray Adhesive: Provide spray adhesive in aerosol cans which is specifically formulated to stick tenaciously to sheet polyethylene.
- M. Flexible Duct: Spiral reinforced flex duct for air filtration devices.
- N. Protective Clothing: Workers shall be provided with sufficient sets of properly fitting, full-body, disposable coveralls, head covers, gloves, and 18-inch high boot-type foot covers. Protective clothing shall conform to OSHA Standard 29 CFR 1926.1101.
- O. Surfactants, strippers, sealers, or any other chemicals used shall be non-carcinogenic and non-toxic.



- P. Materials used in the construction of temporary enclosures shall be noncombustible or fire-retardant in accordance with NFPA 701 and 255.

2.03 TOOLS AND EQUIPMENT

- A. Air Filtration Device (AFD): AFDs shall be equipped with High Efficiency Particulate Air (HEPA) filtration systems and shall be approved by and listed with Underwriter's Laboratory.
- B. Scaffolding: All scaffolding shall be designed and constructed in accordance with OSHA (29 CFR 1926/1910), New York City Building Code, and any other applicable federal, state and local government regulations. Whenever there is a conflict or overlap of the above references the most stringent provisions are applicable. All scaffolding and components shall be capable of supporting without failure a minimum of four times the maximum intended load, plus an allowance for impact. All scaffolding and staging must be certified in writing by a Professional Engineer licensed to practice in the State of New York.
1. Equip rungs of all metal ladders, etc., with an abrasive, non-slip surface.
 2. Provide non-skid surface on all scaffold surfaces subject to foot traffic. Scaffold ends and joints shall be sealed with tape to prevent penetration of asbestos fibers.
- C. Transportation Equipment: Transportation Equipment, as required, shall be suitable for loading, temporary storage, transit and unloading of asbestos contaminated waste without exposure to persons or property. Any temporary storage containers positioned outside the building for temporary storage shall be metal, closed and locked.
- D. Vacuum Equipment: All vacuum equipment utilized in the Work Area shall utilize HEPA filtration systems.
- E. Vacuum Attachments: Soft Brush Attachment, Asbestos Scraper Tool, Drill Dust Control Kit.
- F. Electric Sprayer: An electric airless sprayer suitable for application of encapsulating material and shall be approved by and listed with Underwriters Laboratory.
- G. Water Sprayer: The water sprayer shall be an airless or other low-pressure sprayer for amended water application.
- H. Water Atomizer: Powered air-misting device equipped with a ground fault interrupter and equipped to operate continuously.



- I. Brushes: All brushes shall have nylon bristles. Wire brushes are excluded from use due to their potential to shred asbestos fibers into small, fine fibers.
- J. Power tools used to drill, cut into, or otherwise disturb ACM shall be manufacturer-equipped with HEPA filtered local exhaust ventilation. Abrasive removal methods, including the use of beadblasters, are prohibited.
- K. Other Tools and Equipment: Asbestos abatement contractor shall provide other suitable tools for the stripping, removal, encapsulation, and disposal activities including but not limited to: hand-held scrapers, sponges, rounded-edge shovels, brooms, and carts.
- L. Fans and Leaf Blower: Provide Leaf Blower (one leaf blower per floor) and one 20-inch diameter fans for each 10,000 cubic feet of Work Area volume to be used for aggressive sampling technique for clearance air testing.
- M. Fire Extinguishers: At least one fire extinguisher with a minimum rating 2-A:10-B:C shall be required for each work place. In the case of large asbestos projects, at least two such fire extinguishers shall be required.
- N. First Aid Kits: Asbestos abatement contractor shall maintain adequately stocked first aid kits in the clean rooms of the decontamination units and within Work Areas. The first aid kit shall be approved by a licensed physician for the work to be performed under this Contract.
- O. Water Service:
 - 1. Temporary Water Service Connection: All connections to the Facilities water system shall include back flow protection. Valves shall be temperature and pressure rated for operation of the temperature and pressures encountered. After completion of use, connections and fittings shall be removed without damage or alteration to existing water piping, and equipment. Leaking or dripping fittings/valves shall be repaired and or replaced as required.
 - 2. Water Hoses: Employ new heavy-duty abrasion-resistant hoses with a pressure rating greater than the maximum pressure of the water distribution system to provide water into each Work Area and to each Decontamination Enclosure Unit. Provide fittings as required for connection to existing wall hydrants or spouts, as well as temporary water heating equipment, branch piping, showers, shut-off nozzles and equipment.
 - 3. Water Heater: Provide UL rated 40-gallon electric water heaters to supply hot water for Personal Decontamination Enclosure System Shower. Activate from 30 Amp Circuit breakers located within the Decontamination Enclosure sub panel. Provide relief valve compatible with water heater operations, pipe relief valve down to drip pan at floor level with type 'L'



copper piping. Drip pans shall be 6-inch deep and securely fastened to water heater. Wiring of the water heater shall comply with NEMA, NECA, and UL standards.

P. Electrical Service:

1. **General:** Comply with applicable NEMA, NEC and UL standards and governing regulations for materials and layout of temporary electric service.
2. **Temporary Power:** Provide service to decontamination unit sub panel with minimum 60 AMP, two pole circuit breaker or fused disconnect connected to the building's main distribution panel. Sub panel and disconnect shall be sized and equipped to accommodate all electrical equipment required for completion of the work.
3. **Voltage Differences:** Provide identification warning signs at power outlets that are other than 110-120 volt power. Provide polarized outlets for plug-in type outlets, to prevent insertion of 110-120 volt plugs into higher voltage outlets. Dry type transformers shall be provided where required to provide voltages necessary for work operations.
4. **Ground Fault Protection:** Equip all circuits for any purpose entering Work Area with ground fault circuit interrupters (GFCI). Locate the GFCIs outside the Work Area so that all circuits are protected prior to entry to Work Area. Provide circuit breaker type ground fault circuit interrupters (GFCI) equipped with test button and reset switch for all circuits to be used for any purpose in Work Area, decontamination units, exterior, or as otherwise required by NECA, OSHA or other authority.
5. **Power Distribution System:** Provide circuits of adequate size and proper characteristics for each use. In general run wiring overhead, and rise vertically where wiring will be least subject to damage from operations.
6. **Temporary Wiring:** In the Work Area shall be type UF non-metallic sheathed cable located overhead and exposed for surveillance. Provide liquid tight enclosures or boxes for all wiring devices. Do not wire temporary lighting with plain, exposed (insulated) electrical conductors.
7. **Electrical Power Cords:** Use only grounded extension cords; use hard service cords where exposed to traffic and abrasion. Use single lengths of cords only.
8. **Temporary Lighting:** All lighting within the Work Area shall be liquid and moisture proof and designed for the use intended.



- a. Provide sufficient temporary lighting to ensure proper workmanship everywhere; by combined use of daylight, general lighting, and portable plug-in task lighting.
 - b. Provide lighting in the Decontamination Unit as required to supply a minimum 50-foot candle light level.
9. If electrical circuits, machinery, and other electrical systems in or passing through the work area must stay in operation due to health and safety requirements, the following precautions must be taken:
- a. All unprotected cables, except low-voltage (less than 24 volts) communication and control system cables, panel boxes of cables and joints in live conduit that run through the work area shall be covered with three (3) independent layers of six (6) mil fire retardant polyethylene. Each layer shall be individually duct taped and sealed. All three (3) layers of polyethylene sheeting shall be left in place until satisfactory clearance air sampling results have been obtained.

2.04 CLEANING

- A. Throughout the construction period, the asbestos abatement contractor shall maintain the building as described in this Section.
1. The asbestos abatement contractor shall prevent building areas other than the Work Area from becoming contaminated with asbestos-containing dust or debris. Should areas outside the Work Area become contaminated with asbestos-containing dust or debris as a consequence of the asbestos abatement contractor's work practices, the asbestos abatement contractor shall be responsible for cleaning these areas in accordance with the procedures appended in Title 15, Chapter 1 of RCNY and NYS DOL ICR56. All costs incurred in cleaning or otherwise decontaminating non-Work Areas and the contents thereof shall be borne by the asbestos abatement contractor at no additional cost to the City.
 2. The asbestos abatement contractor shall provide to all personnel and laborers the required equipment and materials needed to maintain the specified standard of cleanliness.
- B. General
1. Waste water from asbestos removal operations, including shower water, may be discharged into the public sewer system only after approved filtration is on operation to remove asbestos fibers.



2. Asbestos wastes shall be double bagged in six mil fire retardant polyethylene bags approved for ACM disposal and shall be properly labeled and handled before disposal.
3. All waste generated shall be bagged, wrapped or containerized immediately upon removal. The personal and waste decontamination enclosure systems and floor and scaffold surfaces shall be HEPA vacuumed and wet cleaned at the end of each work shift at a minimum.
4. The asbestos abatement contractor shall use corrugated cartons or drums for disposal of asbestos-containing waste having sharp edged components (e.g., nails, screws, metal lathe and tin sheeting) that may tear polyethylene bags and sheeting. The waste within the drums or cartons must be double bagged.
5. The asbestos abatement contractor shall transport all bags of waste to disposal site in thirty gallon capacity metal or fiber drums with tight lids, or in locked steel dumpster.
6. Dumping of debris, waste or bagged waste will not be permitted.
7. The waste decontamination enclosure system shall be wet cleaned twice using wet cleaning methods upon completion of waste removal. When the worker decontamination enclosure shower room alternates as a waste container wash room, the shower room shall be washed immediately with cloths or mops saturated with a detergent solution prior to wet cleaning.
8. Excessive water accumulation or flooding in the work area shall require work to stop until the water is collected and disposed of properly.
9. ACM shall be collected utilizing rubber dust pans and rubber squeegees.
10. HEPA vacuums shall not be used on wet materials unless specifically designed for that purpose.
11. Metal shovels shall not be used within the work area.
12. Mastic solvent when used will be applied in moderation (e.g., by airless sprayer). Saturation of the concrete floor with mastic solvent must be avoided.
13. The asbestos abatement contractor shall retain all items in the storage area in an orderly arrangement allowing maximum access, not impeding traffic, and providing the required protection of all materials.



14. The asbestos abatement contractor shall not allow accumulation of scrap, debris, waste material, and other items not required for use in this work. When asbestos contaminated waste must be kept on the work site overnight or longer, it shall be double bagged and stored in accordance with New York City Department of Sanitation (DSNY) regulation Title 16 Chapter 8, and Federal, State and City laws.
15. At least twice a week (more if necessary), the asbestos abatement contractor shall completely remove all scrap, debris and waste material from the job site.
16. The asbestos abatement contractor shall provide adequate storage space for all items awaiting removal from the job site, observing all requirements for fire protection and concerns for the environment.
17. All respiratory protection equipment shall be selected from the latest NIOSH Certified Equipment list.
18. Daily and more often, if necessary, the asbestos abatement contractor shall inspect the Work Areas and adjoining spaces, and pick up all scrap, debris, and waste material. All such items shall be removed to the place designated for their storage.
19. Weekly, and more often, if necessary, the asbestos abatement contractor shall inspect all arrangements of materials stored on the site; re-stack and tidy them or otherwise service them to meet the requirements of these Specifications.
20. The asbestos abatement contractor shall maintain the site in a neat and orderly condition at all times.

PART 3 – EXECUTION

3.01 WORKER DECONTAMINATION FACILITY

A. Large Asbestos Projects:

1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas
 - a. Structure:



- (1) Use modular systems or build using wood or metal frame studs, joists, and rafters placed at a maximum of 16 inches on-center.
 - (2) When worker decontamination unit is located outdoors, in areas with public access, or in correctional facilities, frame work shall be lined with minimum 3/8" thickness fire rated plywood sheathing. Sheathing shall be caulked or taped airtight at all joints and seams.
 - (3) Interior shall be covered with two layers of fire retardant 6-mil polyethylene sheeting, with a minimum overlap of 12 inches at seams. Seal seams airtight using tape and adhesive. The interior floor shall be covered with two (2) layers of reinforced fire-retardant polyethylene sheeting with a minimum overlap on the walls of 12 inches.
 - (4) Entrances to the decontamination unit shall be secured with lockable hinged doors. Doors shall be open at all times when abatement operations are in progress. Doors shall be louvered to allow for air movement through the decontamination units into Work Area.
- b. Curtained Doorways: A device to allow ingress or egress from one room to another while permitting minimal air movement between the rooms.
- c. Air Locks: Air locks shall consist of two curtained doorways placed a minimum of three feet apart. The curtained doorways shall consist of 3 overlapping sheets of fire retardant 6-mil polyethylene sheeting, with alternating entrances and weighted at the bottom.
- d. Decontamination Enclosure System shall be placed adjacent to the Work Area and shall consist of three totally enclosed chambers, separated from Work Area and each other by airlocks, as follows:
- (1) Equipment Room: The equipment room shall have a curtain doorway to separate it from the Work Area, and share a common airlock with the shower room. The equipment room shall be large enough to accommodate at least one worker (allowing them enough room to remove their protective clothing and footwear), and a fire retardant 6-mil disposal bag for collection of discarded clothing and equipment. The equipment room shall be utilized for the storage of equipment and tools after decontamination using a HEPA-vacuum and/or wet cleaning. A one-day supply of replacement filters, in



sealed containers, for HEPA-vacuums and negative air machines, extra tools, containers of surfactant, and other materials and equipment required for the project shall be stored here. A walk-off pan filled with water shall be placed in the Work Area just outside the equipment room for persons to clean foot coverings when leaving the Work Area. Contaminated footwear and reusable work clothing shall be stored in this room.

- (2) **Shower Room:** The shower room shall have two airlocks (one that separates it from the equipment room and one that separates it from the clean room). The shower room shall contain at least one shower, with hot and cold water adjustable at the tap, per six workers. Careful attention shall be given to the shower to ensure against leaking of any kind and shall contain a rigid catch basin at least six inches deep. Asbestos abatement contractor shall supply towels, shampoo and liquid soap in the shower room at all times. Shower water shall be continuously drained, collected, and filtered through a system with at least a 5-micron particle size collection capacity. A system containing a series of several filters with progressively smaller pore sizes shall be used to avoid rapid clogging of the filters by large particles. Pumps shall be installed, maintained and utilized in accordance with manufacturer's recommendations. Filtered water shall be discharged in accordance with applicable codes. Contaminated filters shall be disposed of as asbestos waste.
- (3) **Clean Room:** The clean room shall share a common airlock with the shower room and shall have a curtained doorway to separate it from outside non-contaminated areas. Lockers, for storage of workers' street clothing, and shelves, for storing respirators, shall be provided in this area. Clean disposable clothing, replacement filters for respirators, and clean dry towels shall be provided in the clean room. The clean room shall not be used for the storage of tools, equipment or other materials.

B. Small Asbestos Projects:

1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas.



2. The worker decontamination enclosure system shall consist of, at a minimum, an equipment room, a shower room, and a clean room separated from each other and from the work area by curtained doorways. The equipment storage, personnel gross decontamination and removal of disposal clothing shall occur in the equipment room prior to entering the shower. All other requirements shall be the same as described above for a large asbestos project.
 3. For small asbestos projects with only one exit from the work area, the shower room may be used as a waste washroom. The clean room shall not be used for waste storage. All other requirements shall be the same as described above for a large asbestos project.
- C. Decontamination Enclosure System Utilities: Lighting, heat, and electricity shall be provided as necessary by the Asbestos abatement contractor, and as specified herein.

3.02 WASTE DECONTAMINATION FACILITY

- A. Large Asbestos Project (Small Project Option)
1. Provide a worker decontamination facility in accordance with, Title 15, Chapter 1, OSHA Standard 29 CFR 1926.1101, 12NYCRR Part 56 and as specified herein. Unless approved by NYCDEP and the City, worker decontamination facilities shall be attached to the Work Areas.
 - a. Structure:
 - (1) Use modular systems or build using wood or metal frame studs, joists, and rafters placed at a maximum of 16 inches on-center.
 - (2) When worker decontamination unit is located outdoors, in areas with public access, or in correctional facilities, frame work shall be lined with minimum 3/8" thickness fire rated plywood sheathing. Sheathing shall be caulked or taped airtight at all joints and seams.
 - (3) Interior walls shall be covered with two layers of fire retardant 6-mil polyethylene sheeting, with a minimum overlap of 12 inches at seams. Seal seams airtight using tape and adhesive. The interior floor shall be covered with two (2) layers of reinforced fire-retardant polyethylene sheeting with a minimum overlap on the walls of 12 inches.



- (4) Entrances to the decontamination unit shall be secured with lockable hinged doors. Doors shall be open at all times when abatement operations are in progress. Doors shall be louvered to allow for air movement through the decontamination units into the Work Area.
 - b. Curtained Doorways: A device to allow ingress or egress from one room to another while permitting minimal air movement between the rooms.
 - c. Air Locks: Air locks shall consist of two curtained doorways placed a minimum of three feet apart. The curtained doorways shall consist of 3 overlapping sheets of fire retardant 6-mil polyethylene sheeting, with alternating entrances and weighted at the bottom.
 - d. Decontamination Enclosure System shall be located outside the work area and attached to all locations through which ACM waste will be removed from the work area and shall consist of two totally enclosed chambers, separated from the Work Area and each other by airlocks, as follows:
 - (1) Washroom: An equipment washroom shall have two air locks (one separating the unit from the Work Area and one common air lock that separates it from the holding area). The washroom shall have facilities for washing material containers and equipment. Gross removal of dust and debris from contaminated material containers and equipment shall be accomplished in the Work Area, prior to moving to the washroom.
- B. Holding Area: A holding area shall share a common air lock with the equipment washroom and shall have a curtained doorway to outside areas. A hinged, lockable door shall be placed at the holding area entrance to prevent unauthorized access into the Work Area.
- C. Small Asbestos Project:
 1. The worker decontamination enclosure system shall consist of, as a minimum, an equipment room, a shower room, and a clean room separated from each other and from the work area by curtained doorways. The equipment storage, personnel gross decontamination and removal of disposal clothing shall occur in the equipment room prior to entering the shower. All other requirements shall be the same as described above for a large asbestos project.



2. For small asbestos projects with only one exit from the work area, the shower room may be used as a waste washroom. The clean room shall not be used for waste storage. All other requirements shall be the same as described above for a large asbestos project.
- D. Decontamination Enclosure System Utilities: Lighting, heat, and electricity shall be provided as necessary by the Asbestos abatement contractor, and as specified herein.

3.03 PERSONNEL ENTRANCE AND DECONTAMINATION PROCEDURES FOR REMOVAL OPERATIONS UTILIZING REMOTE DECONTAMINATION FACILITIES

- A. All individuals who enter the Work Area shall sign the entry log, located in the clean room, upon each entry and exit. The log shall be permanently bound and shall fully identify the facility, agents, asbestos abatement contractor(s), the project, each Work Area, and worker respiratory protection employed. The asbestos handler supervisor shall be responsible for the maintenance of the log during the abatement activity. The log shall be submitted to the NYC DDC within 48 hours of request.
- B. Each worker shall remove street clothes in the clean room; wear two disposable suits, including gloves, hoods and non-skid footwear; and put on a clean respirator (with new filters) before entering the Work Area.
- C. Each worker shall, before leaving the Work Area or tent, clean the outside of the respirators and outer layer of protective clothing by wet cleaning and/or HEPA-vacuuming. The outer disposable suit shall be removed in the airlock prior to proceeding to the Worker Decontamination Unit. The inner disposable suit and respirator shall be wet wiped and HEPA vacuumed thoroughly before removing and prior to aggressive shower.
- D. Following showering and drying off, each worker or authorized visitor shall proceed directly to the clean room, dress in street clothes, and exit the decontamination enclosure system immediately.

3.04 PERSONNEL ENTRANCE AND DECONTAMINATION PROCEDURES FOR REMOVAL OPERATIONS UTILIZING ATTACHED DECONTAMINATION FACILITIES

- A. All workers and authorized visitors shall enter the Work Area through the worker decontamination facility.
- B. All individuals who enter the Work Area shall sign the entry log, located in the clean room, upon each entry and exit. The log shall be permanently bound and shall identify fully the facility, agents, asbestos abatement contractor(s), the



project, each Work Area and worker respiratory protection employed. The site supervisor shall be responsible for the maintenance of the log during the abatement activity. The log shall be submitted to the NYC DDC within 48 hours of request.

- C. Each worker or authorized visitor shall, upon entering the job site, remove street clothes in the clean room and put on a clean respirator with filters, and clean protective clothing before entering the Work Area through the shower room and equipment room.
- D. Each worker or authorized visitor shall, each time he leaves the Work Area, remove gross contamination from clothing before leaving the Work Area; proceed to the equipment room and remove clothing except the respirator; still wearing the respirator, proceed to the shower room; clean the outside of the respirator with soap and water while showering; remove filters, wet them, and dispose of them in the container provided for that purpose; wash and rinse the inside of the respirator; and thoroughly shampoo and wash himself/herself.
- E. Following showering and drying off, each worker or authorized visitor shall proceed directly to the clean room, dress in street clothes, and exit the decontamination enclosure system immediately. Disposable clothing of the type worn inside the Work Area is not permitted outside the Work Area.

3.05 MAINTENANCE OF DECONTAMINATION ENCLOSURE FACILITIES AND BARRIERS

The following procedures shall be followed during abatement activities.

- A. All polyethylene barriers inside the work place and partitions constructed to isolate the Work Area from occupied areas shall be inspected by the asbestos handler supervisor at least twice per shift.
- B. Smoke tubes shall be used to test the integrity of the Work Area barriers and the decontamination enclosure systems daily before abatement activity begins and at the end of each shift.
- C. Damage and defects in the decontamination enclosure system shall be repaired immediately upon discovery. The decontamination enclosure system shall be maintained in a clean and sanitary condition at all times.
- D. At any time during the abatement activity, if visible emissions are observed, or elevated asbestos fiber counts outside the Work Area are measured, or if damage occurs to barriers, abatement shall stop. The source of the contamination shall be located, the integrity of the barriers shall be restored and extended to include the contaminated area, and visible residue shall be cleaned up using appropriate HEPA-vacuums and wet cleaning.



- E. Inspections and observations shall be documented in the daily project log by the asbestos handler supervisor.
- F. The daily inspection to ensure that exits have been checked against exterior blockage or impediments to exiting shall be documented in the log book. If exits are found to be blocked, abatement activities shall stop until the blockage is cleared.

3.06 MODIFICATIONS TO HVAC SYSTEMS

- A. Shut down, isolate or seal, all existing HVAC units, fans, exhaust fans, perimeter convection air units, supply and/or return air ducts, etc., situated in, traversing or servicing the work zone.
- B. Seal all seams with duct tape. Wrap entire duct with a minimum of two layers of fire retardant 6-mil polyethylene sheeting. All shutdowns are to be coordinated with the Facility. Where systems must be maintained, i.e., traversing Work Areas to non-Work Areas, only supply ducts will be maintained, protect as described above. All returns must be blanked off in Work Area and adjacent areas, including floor above and below Work Area. When required Asbestos abatement contractor shall apply for a clarification from NYCDEP. The Asbestos abatement contractor shall implement the following engineering procedures:
 - 1. Maintenance of a positive pressure within the HVAC system of 0.01 inch water gauge (or greater) with respect to the ambient pressure outside the Work Area. The conditions for this system shall be maintained and be operational 24 hours per day from the initiation of Work Area preparation until successful final air clearance. Positive pressurization of HVAC system shall be applied only under the direction and control of professional engineer, or other knowledgeable licensed professional;
 - 2. The positive pressurization of the duct shall be tested, inspected and recorded both at the beginning and at the end of each shift;
 - 3. The positive pressurization shall be monitored using instrumentation which will provide a written record of pressurization and that will trigger an audible alarm, if the static pressure falls below the set value;
 - 4. The supply air fan and the supply air damper for the active positive-pressurized duct shall be placed in the manual "on" positions to prevent shutdown by fail-safe mechanisms;
 - 5. The return air fan and the return air dampers shall be shut down and locked-out;



6. All the seams of the HVAC ducts that pass through the Work Area shall be sealed;
 7. The HVAC ducts that pass through the Work Area shall be covered with two (2) layers of fire retardant 6-mil polyethylene sheeting, and all seams and edges of both layers shall be sealed airtight;
 8. The supply air fans, return air fans, and all dampers servicing the Work Area itself shall be shut down and locked-out. All openings within the Work Area of supply and return air ducts shall be sealed with 3/8-inch fire rated plywood and two layers of fire retardant 6-mil polyethylene;
 9. When abatement occurs during periods while the HVAC system is shut down an alternative method of pressurization of the duct passing through the Work Area should be employed (e.g., by low-pressure “blowers”, etc., directly coupled into the duct). Item #4 above shall be deleted and shall be replaced by the requirement to set the dampers of the HVAC duct in the manual closed positions, in order to effect pressurization.
- C. Asbestos abatement contractor to coordinate this item with the Facility and Construction Project Manager at the commencement of work. Where present HVAC systems (ducts) service an area and that air system cannot be shut down, asbestos abatement contractor shall isolate and seal the ducts, both supply and return, at the boundary of that zone.
1. To isolate, cap, or seal a duct, the asbestos abatement contractor shall remove insulation from duct (if necessary), then disconnect linkage to fold shut all fire dampers. Asbestos abatement contractor shall seal all edges and seams with caulk and duct-tape.
 2. Asbestos abatement contractor shall then cut existing duct and fold metal in and secure with approved fasteners. Asbestos abatement contractor shall caulk and duct-tape all seams and edges.
 3. All ducts shall then be completely wrapped and sealed with duct-tape and three (3) layers of reinforced polyethylene sheeting.
 4. All ducts shall be restored to original working order at the end of the project.
- D. Where present HVAC systems (ducts) service occupied areas (non-Work Areas), the Asbestos abatement contractor shall blank off the ducts.
1. To isolate or seal the return duct, the asbestos abatement contractor shall remove any insulation (if necessary) from the duct. Then disconnect linkage to fold shut all fire dampers and insert a fiberglass board within the duct. Asbestos abatement contractor shall seal all edges and seams with caulk, duct-tape and three (3) layers of reinforced polyethylene sheeting.



2. All isolation of return ducts and any other activity that requires removal of ceiling by the asbestos abatement contractor shall be conducted under controls. Work is to be coordinated with the Construction Project Manager and the Facility and is described as follows:
 - a. Work shall occur as scheduled.
 - b. Horizontal surfaces near the blanking operations shall be protected with fire retardant 6-mil polyethylene sheeting.
 - c. Plastic drapes shall be used to enclose the immediate area.
 - d. Asbestos abatement contractor to position and operate air filtration devices and HEPA-vacuums in the area to clean space after blanking operations.
 - e. All personnel involved with this work shall receive personal protection (i.e., respirators and disposable suits).
- E. Upon loss of negative pressure or electric power, all work activities in an area shall cease immediately and shall not resume until negative pressure and/or electric power has been fully restored. When a power failure or loss of negative pressure lasts, or is expected to last, longer than thirty (30) minutes, the following sequence of events shall occur.
 1. All make up air inlets shall be sealed airtight.
 2. All decontamination facilities shall be sealed airtight after evacuation of all personnel from the Work Area.
 3. All adjacent areas shall be monitored for potential fiber release upon discovery of and subsequently throughout, power failure.

3.07 LOCKOUT OF HVAC SYSTEMS, ELECTRIC POWER, AND ACTIVE BOILERS

Prior to the start of any prep work, the asbestos abatement contractor shall employ skilled tradesmen with limited asbestos licenses for the following work:

- A. Disable all ventilating systems or other systems bringing air into or exhausting air out of the Work Area. Disable system by disconnecting wires removing circuit breakers, by lockable switch or other positive means to ensure against accidental re-starting of equipment.



- B. Lock out power to the Work Area by switching off all breakers and removing them from panels or by switching and locking entire panel. Label panel with following notation: “DANGER CIRCUIT BEING WORKED ON”. Give all keys to Facility.
- C. Lock out power to circuits running through Work Area whenever possible by switching off and removing breakers from panel. If circuits must remain live, the Facility shall notify asbestos abatement contractor in order that he may secure a variance from NYCDEP. The asbestos abatement contractor shall protect all conduit and wires to remain and label all active circuits at intervals not to exceed 3 feet with tags having the following notation: “DANGER LIVE ELECTROCUTION HAZARD”. The asbestos abatement contractor shall label all circuits in all locations including hidden locations that may be affected by the work in a similar manner.
- D. All boilers and other equipment within the work area shall be shut down, locked out, tagged out and the burner/boiler/equipment accesses and openings shall be sealed until abatement activities are complete. If the boiler or other exhausted equipment will be subject to abatement, all breeching, stacks, columns, flues, shafts, and double-walled enclosures serving as exhausts or vents shall be segregated from the affected boiler or equipment and sealed airtight to eliminate potential chimney effects within the work area.

PART 4 – PREPARATION OF WORK AREA AND REMOVAL PROCEDURES

4.01 REMOVAL OF ASBESTOS-CONTAINING MATERIAL

A. Asbestos abatement contractor Responsibility

Asbestos abatement contractor shall be responsible for the proper removal of ACM from the Work Area using standard industry techniques. The Third-Party Air Monitor representative shall observe the Work.

1. General Requirements:

- a. Removal of ACM shall be performed using wet methods. Dry removal of ACM is prohibited.
- b. Spray ACM with amended water with sufficient frequency and quantity to enhance penetration. Sufficient time shall be allowed for amended water to penetrate the material to the substrate prior to removal. All ACM shall be thoroughly wetted while work is being conducted.
- c. Accumulation of standing water on the floor of the Work Area is prohibited.



- d. Apply removal encapsulants, when used, in accordance with the manufacturer's recommendations and guidelines.
- e. Containerize ACM immediately upon detachment from the substrate. Alternately, ACM may be dropped in to a flexible catch basin and promptly bagged. Detached ACM is not permitted to lie on the floor for any period of time. Excess air within the bag shall be removed before sealing. ACM shall not be dropped from a height of greater than 10 feet. Above 10 feet, dust free inclined chutes may be used. Maximum inclination from horizontal shall be 60-degrees for all chutes.
- f. Exits from the work area shall be maintained, or alternative exits shall be established, in accordance with section 1027 of the New York City Fire Code. Exits shall be checked at the beginning and end of each work shift against blockage or impediments to exiting.
- g. Signs clearly indicating the direction of exits shall be maintained and prominently displayed within the work area.
- h. No smoking signs shall be maintained and prominently displayed within the work place.
- i. At least one fire extinguisher with a minimum rating 2-A:10-B:C shall be required for each work place. In the case of large asbestos projects, at least two such fire extinguishers shall be required.
- j. If the containment area of an asbestos project covers the entire floor of the affected building, or an area greater than 15,000 square feet on any given floor, the installation of a negative air cut off switch or switches shall be required at a single location outside the work place, such as inside a stairwell, or at a secured location in the ground floor lobby when conditions warrant. The required switch or switches shall be installed by a licensed electrician pursuant to a permit issued by the Department of Buildings. If negative pressure ventilation equipment is used on multiple floors the cut off switch shall be able to turn off the equipment on all floors.

B. Removal of ACM Utilizing Full Containment Procedures shall be as follows:

1. Preparation Procedures:

- a. Ensure that the Third-Party Air Monitor has performed area monitoring and established a background count prior to the preparatory operations for each removal area, as applicable.



- b. Shut down, isolate, and lock out or tag heating, ventilating, and air conditioning (HVAC) systems which serve or which pass through the Work Area. Vents within the Work Area and seams in HVAC components shall be sealed with tape and two layers of fire-retardant polyethylene sheeting. Filters in HVAC systems shall be removed and treated as asbestos contaminated waste.
- c. Shut down, disconnect, and lock out or tag all electric power to the Work Area so that there is no possibility of its reactivation until after clearance testing of the Work Area.
- d. Provide and install decontamination enclosure systems in accordance with Sections 3.01 and 3.02 of this Section.
- e. Remove ACM that may be disturbed by the erection of partitions using tent procedures and wet removal methods. Removal shall be limited to a one-foot wide strip running the length/height of the partition.
- f. Pre-clean and remove moveable objects from the Work Area. Pre-cleaning shall be accomplished using HEPA-vacuum and wet-cleaning techniques. Store moveable objects at a location determined by the City.
- g. Protect carpeting that will remain in the Work Area.
 - (1) Pre-clean carpeting utilizing wet-cleaning techniques.
 - (2) Install a minimum of two layers of fire retardant 6-mil reinforced polyethylene sheeting over carpeting.
 - (3) Place a rigid flooring material, minimum thickness of 3/8-inch, over polyethylene sheeting.
- h. Pre-clean all fixed objects to remain within the Work Area using HEPA-vacuum and wet-cleaning techniques.
- i. Seal fixed objects with two individual layers, minimum, of 6-mil fire retardant polyethylene sheeting.
- j. Pre-clean entire Work Area utilizing HEPA-vacuum and wet-cleaning techniques. Methods of cleaning that raise dust; such as dry sweeping or use of vacuum equipment not equipped with HEPA-filters, is prohibited.



- k. Install isolation barriers (i.e., sealing of all openings, including but not limited to windows, corridors, doorways, skylights, ducts, grills, diffusers, and other penetrations within the Work Area) using two layers of 6-mil fire retardant polyethylene sheeting and duct-tape.
- l. Construct rigid framework to support Work Area barriers.
 - (1) Framework shall be constructed using 2-inch by 4-inch wooden or metal studs placed 16 inches on center when existing walls and/or ceiling do not exist for all openings greater than 32 square feet. Framework is not required except where one dimension is one foot or less or the opening will be used as an emergency exit.
 - (2) Apply a solid construction material, minimum thickness of 3/8- inch to the Work Area side of the framing. In secure interior areas, not subject to access from the public or building occupants, an additional layer of 6-mil fire retardant polyethylene sheeting may be substituted for the rigid construction material.
 - (3) Caulk all wall, floor, ceiling, and fixture joints to form a leak tight seal.
- m. Seal floor drains, sumps, shower tubs, and other collection devices with two layers of 6-mil fire retardant plastic and fire rated plywood, as necessary, and provide a system to collect all water used by the asbestos abatement contractor. Collected water shall be passed through a water filtration system prior to being discharged into the sanitary sewer.
- n. Remove ceiling mounted objects not previously sealed that will interfere with removal operations. Mist object and surrounding ACM with amended water prior to removal to minimize fiber dispersal. Clean all moveable objects using HEPA-vacuum and wet-cleaning techniques prior to removal from the Work Area.
- o. Fiberglass insulation with intact coverings shall be protected in place during abatement activities. These materials shall be protected with two layers of 6-mil fire retardant polyethylene sheeting as isolation barriers and two additional layers of 6-mil fire retardant polyethylene sheeting serving as primary and secondary surface barriers.



- p. Install and initiate operation of Air Filtration Devices (AFD)s to provide a negative pressure and a minimum of four air changes per hour within the Work Area relative to surrounding non-Work Areas. Do not shut down AFDs until the Work Area is released to the City following final clearance procedures. The use of HEPA-filtered vacuum to produce a negative air pressure inside the enclosure is prohibited.
- q. Maintain emergency and fire exits from the Work Area or establish alternative exits satisfactory to the local fire officials. Emergency exits and routes shall be established and clearly marked with florescent paint or other effective designations to permit easy location from anywhere within the Work Area. Cutting tools (e.g., knife, razor) shall be attached to the work area side of the sheeting for use in the event that the barrier must be cut open to allow egress. Emergency exits shall be secured to prevent access from uncontaminated areas and yet permit emergency exiting. Exits shall be checked daily against exterior blockage or impediments to exiting.
- r. Temporary lighting within the Work Area and decontamination system shall be provided as required to achieve minimum illumination levels.
- s. Hand power tools used to drill, cut into, or otherwise disturb ACM shall be manufacturer-equipped with HEPA filtered local exhaust ventilation.
- t. Prior to being plasticized, the Work Areas shall be cleaned using HEPA vacuum equipment and/or wet cleaning methods as appropriate. Methods that raise dust, such as dry sweeping or vacuuming with equipment not equipped with HEPA filters, shall not be used.
- u. Plasticize the area after pre-cleaning, using the following procedures.
 - (1) Cover floors with one layer of 6-mil fire retardant polyethylene sheeting, turning layer a minimum of 6 inches up wall, and seal layer to wall.
 - (2) Cover walls with one layer of 6-mil fire retardant polyethylene sheeting, overlapping wall layer a minimum of 6 inches, and seal layer to floor layer.



- (3) Cover floors with a second layer of 6-mil fire retardant polyethylene sheeting, turning layer a minimum of 12 inches up wall, and seal layer to wall.
 - (4) Cover walls with a second layer of fire retardant 6-mil polyethylene sheeting, overlapping wall layer a minimum of 12 inches, and seal layer to floor layer.
 - (5) In areas where demolition is required to access ACM, a layer of fire retardant 6-mil reinforced polyethylene sheeting shall be placed on the floor of the enclosure.
 - (6) Perform demolition required to access ACM. Debris resulting from demolition activities shall be disposed of as ACM waste as described in this Specification.
 - (7) Repeat preparation of areas accessed by demolition activities as described above.
- v. Suspended ceiling tiles and T-grid components shall remain in place until the preparation of the Work Area below the ceiling tiles are completed and personnel and equipment decontamination enclosures have been constructed.
- w. Scaffolds shall be provided for workers engaged in work that cannot safely be performed from the ground or other solid Work Area surface.
- x. Means of egress shall not be obstructed by hard wall barriers.
- y. Pre-Removal Inspections.
- (1) Prior to removal of any ACM, the asbestos abatement contractor shall notify the Third-Party Air Monitor and request a pre-removal inspection. Posting of warning signs, building of decontamination enclosure systems, and all other preparatory steps have been taken prior to notification of the Third-Party Air Monitor.
 - (2) Asbestos abatement contractor shall correct any deficiencies observed by Third-Party Air Monitor at no additional cost to City.
 - (3) Following the Third-Party Air Monitor's approval of the Work Area preparations, removal of ACM may commence.



2. Removal of ACM Within Full Containment:
 - a. Mist material with amended water. Allow sufficient time for the amended water to penetrate the material to be removed.
 - b. Remove the material using hand tools such as scrapers or putty knives. Wire-mesh or wood lathe reinforcing, when present, shall be cut into manageable pieces and disposed of as ACM.
 - c. Remove any residual material from the substrate using wet cleaning methods and nylon-bristled hand brushes.
 - d. Place the removal material immediately into a properly labeled fire retardant 6-mil polyethylene bag. All material shall be properly containerized and decontaminated prior to removal from the Work Area.
 - e. Following the completion of removal of insulation, all visible residue shall be removed from the substrate.
3. Following Removal of ACM utilizing Full Containment Procedures:
 - a. First Cleaning:
 - (1) Remove any visible accumulation of asbestos material and debris. HEPA-vacuuming and wet cleaning shall be performed on all surfaces inside the Work Area. All sealed drums, plastic bags, and equipment used in the Work Area shall be removed from the Work Area.
 - (2) Upon request of the asbestos abatement contractor, the Third- Party Air Monitor will perform a visual inspection. Evidence of asbestos contamination identified during the inspection will necessitate further cleaning as heretofore specified.
 - (3) Remove first layer of plastic sheathing inside the Work Area. The isolation barriers and decontamination facility shall remain in place and be utilized.
 - b. Second Cleaning:
 - (1) After the first cleaning, the Work Area shall be vacated for twelve hours to allow fibers to settle.



- (2) All objects and surfaces in the Work Area shall be HEPA - vacuumed and wet cleaned for a second cleaning.
 - (3) A thin coat of lockdown encapsulant shall be applied to all plastic covered surfaces in the Work Area.
 - (4) When the encapsulant is dry, second layer of polyethylene sheeting on the walls, ceiling and floors shall be removed. Do not remove seals from doors, windows, Isolation Barriers or disconnect the negative pressure equipment.
- c. Third Cleaning:
- (1) A minimum of four hours after the second cleaning, all the surfaces in the Work Area shall be HEPA-vacuumed and wet cleaned for a third cleaning.
 - (2) Upon the request of the asbestos abatement contractor, the Third-Party Air Monitor will do final visual inspection for re- occupancy. Evidence of asbestos contamination identified during the inspection will necessitate further cleaning as heretofore specified.
 - (3) When the Work Area passes the Third-Party Air Monitor's visual re-occupancy inspection, air sampling shall not begin until at least one hour after the completion of the third cleaning. The Third-Party Air Monitor shall perform air monitoring using aggressive testing techniques. The Third- Party Air Monitor will approve re-occupancy if the specified fiber count in the Work Area is achieved according to the Third-Party Air Monitor.
 - (4) When the Work Area passes the re-occupancy test, all controls and seals established shall be removed.
 - (5) The cleaned layer of the surface barriers shall be removed from walls and floors.
 - (6) The isolation barriers shall remain in place throughout cleanup. Decontamination enclosure systems shall remain in place and be utilized. A thin coat of lockdown encapsulant shall be applied to all surfaces in the work area which were not the subject of removal or abatement, including the cleaned layer of the surface barriers, but



excepting sprinklers, standpipes, and other active elements of the fire suppression system.

- d. Final Barrier Removal:
 - (1) Upon receipt of acceptable clearance testing results, polyethylene sheeting and Isolation Barriers shall be removed and disposed accordingly as asbestos-containing material.
 - (2) The area surrounding the abatement workplace shall be cleaned of any visible debris utilizing HEPA vacuum and wet methods.
- e. The Third-Party Air Monitor will conduct a final visual observation. Approval must be granted prior to break down of decontamination facility and asbestos abatement contractor demobilization.

C. Removal of ACM Utilizing NYC DEP § 1-106 Tent Containment Procedures shall be as follows:

- 1. Preparation Procedures:
 - a. Ensure that the Third-Party Air Monitor has performed area monitoring and established a background count prior to the preparatory operations for each removal area, as applicable.
 - b. Shut down, isolate, and lock out or tag heating, ventilating, and air conditioning (HVAC) systems which serve or which pass through the Work Area. Vents within the Work Area and seams in HVAC components shall be sealed with tape and two layers of polyethylene sheeting. Filters in HVAC systems shall be removed and treated as asbestos contaminated waste.
 - c. Shut down, disconnect, and lock out or tag all electric power to the Work Area so that there is no possibility of its reactivation until after clearance testing of the Work Area.
 - d. Provide and install decontamination enclosure systems in accordance with PART 3 - EXECUTION, Sections 3.01 and 3.02 of these Specifications Decontamination facilities may be remote from the Work Areas.



- e. Construct rigid framework to support Work Area barriers. Framework shall be constructed using 2-inch by 4-inch wooden or metal studs placed 16 inches on center when existing walls and/or ceiling do not exist.
- f. Seal floor drains, sumps, shower tubs, and other collection devices with two layers of fire retardant 6-mil plastic and minimum 3/8" fire rated plywood, as necessary, and provide a system to collect all water used by the Contractor. Collected water shall be passed through a water filtration system prior to being discharged into the sanitary sewer. Any opening greater than 32 square feet shall be framed with 2-inch by 4-inch studding placed 16 inches on center.
- g. Install and initiate operation of AFDs to provide a negative pressure and a minimum of four air changes per hour and negative pressure of -0.02" of water column within the Work Area relative to surrounding non-Work Areas. Do not shut down AFDs until the Work Area is released to the City following final clearance procedures. The use of HEPA-filtered vacuums to produce a negative air pressure inside the enclosure is prohibited.
- h. Maintain emergency and fire exits from the Work Areas or establish alternative exits satisfactory to the local fire officials. Emergency exits and routes shall be established and clearly marked with florescent paint or other effective designations to permit easy location from anywhere within the Work Area. Emergency exits shall be secured to prevent access from uncontaminated areas and yet permit emergency exiting. Exits shall be checked daily against exterior blockage or impediments to exiting.
- i. Temporary lighting within the Work Area and decontamination system shall be provided as required to achieve minimum illumination levels.
- j. Hand power tools used to drill, cut into, or otherwise disturb ACM shall be manufacture equipped with HEPA filtered local exhaust ventilation.
- k. Prior to being plasticized, the Work Areas shall be cleaned using HEPA-vacuum equipment and/or wet cleaning methods as appropriate. Methods that raise dust, such as dry sweeping or vacuuming with equipment not equipped with HEPA filters, shall not be used.



- l. There shall be an airlock at the entrance to the tent, unless there is an attached worker or waste decontamination system.
- m. Plasticize the area after pre-cleaning, using the following procedures. Do not apply polyethylene sheeting to the wall and ceiling surfaces that will be demolished to access ACM.
 - (1) Cover floor with one layer of fire retardant 6-mil polyethylene sheeting, turning layer a minimum of 12 inches up wall, and seal layer to wall.
 - (2) Cover walls with one layer of fire retardant 6-mil polyethylene sheeting, overlapping wall layer a minimum of 12 inches, and seal layer to floor layer.
 - (3) Cover ceilings with one layer of fire retardant 6-mil polyethylene sheeting, overlapping wall layer a minimum of 12 inches, and seal layer to wall layer.
 - (4) Repeat procedure for second layer. All joints in polyethylene sheeting shall be glued and taped in such a manner as to prohibit air passage. Joints on plastic layers shall be staggered to reduce the potential for water to penetrate.
 - (5) In areas where demolition is required to access ACM, a layer of fire retardant 6-mil reinforced polyethylene sheeting shall be placed on the floor of the enclosure.
 - (6) Perform demolition required to access ACM. Debris resulting from demolition activities shall be disposed of as ACM as described in this Specification.
 - (7) Repeat preparation of areas accessed by demolition activities as described above.
 - (8) Suspended ceiling tiles and T-grid components shall remain in place until the preparation of the Work Area below the ceiling tiles are completed and personnel and equipment decontamination enclosures have been constructed.
 - (9) Protect non-ACM insulation within the Work Area(s) with two individual layers of fire retardant 6-mil polyethylene sheeting. Sheeting shall remain in-place until satisfactory clearance air monitoring results are achieved.
- n. Pre-Removal Inspections



- (1) Prior to removal of any ACM, the Contractor shall notify the Third-Party Air Monitor and request a pre-removal inspection. Posting of warning signs, building of decontamination enclosure systems, and all other preparatory steps have been taken prior to notification of the Third-Party Air Monitor.
 - (2) Contractor shall correct any deficiencies observed by Third- Party Air Monitor at no additional cost to City.
 - (3) Following the Third-Party Air Monitor's approval of the Work Area preparations, removal of ACM may commence.
2. Removal of ACM Utilizing Tent Containment Procedure:
- a. Tent procedures shall be limited to the removal of less than 260 linear feet and 160 square feet of ACM and shall not result in disturbance of ACM during tent erection.
 - b. Mist material with amended water and/or foam. Allow sufficient time for the amended water to penetrate the material to be removed.
 - c. Cut bands, wire or other items placed over insulation or ACM.
 - d. Remove the ACM using hand tools such as knives or scrapers.
 - e. Exercise caution when removing ACM.
 - f. Remove any residual asbestos-containing material from the substrate using wet cleaning methods.
 - g. Seal exposed ends of remaining insulation or ACM with a "wetable cloth" and/or encapsulant.
 - h. Place the removed material immediately into a properly labeled fire retardant 6-mil polyethylene bag. All material shall be properly containerized and decontaminated prior to removal from the Work Area.
 - i. Following the completion of removal of ACM, all visible residues shall be removed from the substrate.
3. Following Removal of ACM Utilizing Tent Containment or tent Procedure:
- a. Clean all visible accumulations of loose ACM. Metal shovels shall not be used within the Work Area.



- b. Accumulations of dust shall be cleaned continuously until completion of clean up.
- c. After removal of all visible accumulations of ACM, the area shall be:
 - (1) Wet cleaned using rags, mops or sponges.
 - (2) Permitted sufficient time to dry, prior to HEPA vacuuming all substrates.
 - (3) Lightly encapsulated to lockdown residual asbestos. A thin coat of an encapsulating agent shall be applied to any surfaces in the Work Area which were not the subject of removal or other remediation activities. In no event shall encapsulant be applied to any surface that was the subject of removal or other remediation activities prior to obtaining satisfactory clearance air monitoring results. Contractor shall request and pass a visual inspection performed by the consultant before proceeding to the next step. Documentation of passing this inspection shall be recorded in a daily logbook.
 - (4) The Third-Party Air Monitor will conduct a visual observation of the Work Area to verify the absence of asbestos-containing waste materials.
 - (5) If the Work is accepted by the Third-Party Air Monitor based on the inspection, Contractor shall be notified. Conduct the following activities in accordance with the contract and all applicable laws, codes, rules and regulations.
 - (a) All waste shall be removed from the Work Area and holding areas.
 - (b) All tools and equipment are to be removed and decontaminated in the decontamination enclosure system.
 - (6) If the Work is not approved, the Third-Party Air Monitor will inform Contractor who will then HEPA-vacuum and/or wet- clean the Work Area. The Third-Party Air Monitor will then perform a subsequent visual observation. This process will continue until the Third-Party Air Monitor accepts the Work Area as clean.



- (7) The Work Area shall be vacated for a minimum of one hour to allow fibers to settle prior to clearance air monitoring, when required.
- d. Final Barrier Removal
 - (1) Upon receipt of acceptable clearance testing results polyethylene sheeting (inside layers) and Isolation Barriers shall be removed and disposed accordingly as ACM. The tent shall be collapsed inward, enclosing the contaminated clothing. This contaminated material shall be disposed of in another plastic bag. The HEPA vacuum shall be decontaminated and sealed.
 - (2) The area surrounding the abatement workplace shall be cleaned of any visible debris utilizing HEPA-vacuum and wet methods.
 - e. The Third-Party Air Monitor will conduct final visual. Approval must be granted prior to break down of decontamination facility and contractor demobilization. Other Information: Extra time required to clean Work Areas in order to achieve clearance criteria shall not be considered grounds for an extension of time for contract completion.

4.02 MAINTENANCE OF CONTAINED WORK AREA AND DECONTAMINATION ENCLOSURE SYSTEMS

- A. Ensure that barriers are installed in a manner appropriate to the expected weather conditions during the project and for its duration. Repair damaged barriers and remedy defects immediately upon their discovery. Visually inspect barriers at the beginning and end of each work period.
- B. Visually inspect non-Work Areas and the decontamination enclosure system for water leakage. Check the floor below, ceiling and walls, and view beneath/or around the decontamination enclosure system, for signs of leakage. Perform the visual inspection a minimum of two times for each 8-hour work shift.

PART 5 – ASBESTOS WASTE MANAGEMENT

5.01 ACM WASTE REQUIREMENTS

- A. The asbestos abatement contractor and all sub-asbestos abatement contractors are specifically alerted to the illegal practice of combining asbestos-containing waste (ACW) from one project with the ACW of other projects without using the services of a permitted waste transfer station as defined by 6 NYCRR Part 360 and



364. As part of the shop drawing submittals, the asbestos abatement contractor must submit for approval the proposed method of transportation and disposal that will be utilized to manage the ACW of this Contract. If a permitted transfer station is to be used, the cost shall be included in the work. The asbestos abatement contractor must submit a waste manifest consistent with whatever approved method is utilized as part of the invoicing and payment procedures.

- B. The asbestos abatement contractor shall maintain compliance with the strictest set of regulations of Title 15, Chapter 1 of RCNY, NYC LL 70/85, NYS DOL ICR 56, USEPA, Asbestos Regulation 40 CFR Section 61.152, 29 CFR 1926.1101, 29 CFR 1910.1200 (F) of OSHA's Hazard Communication Standards, and other applicable standards.

NOTE: Any penalties incurred for failure to comply with any of the above regulations will be the sole responsibility for fines imposed due to negligence of the Asbestos abatement contractor.

- C. When presenting ACW for storage at the generation site, the asbestos abatement contractor shall:
1. Wet down ACW in a manner sufficient to prevent all visible emissions of dust into the air.
 2. Seal material in a leak tight container while wet.
 3. Keep ACW separate from any other waste.
- D. When presenting ACW for storage away from the site of generation, the Asbestos abatement contractor shall:
1. Ensure that ACW has been properly packaged as per requirements above.
 2. Examine the containers of ACW to ensure that there are no breaks in the containers and that no visible dust is being released into the air.
 3. If examination reveals damage to a container of ACW the Asbestos abatement contractor or person accepting the waste shall immediately wet down the ACW and repackage it into a clean leak tight container. The subsequent repackaging shall be the financial responsibility of the Asbestos abatement contractor and occur at no extra cost to the City.
 4. Keep ACW separate from any other waste.
- E. When storing ACW – The Asbestos abatement contractor shall:
1. Ensure that the ACW has been sufficiently wetted down in tight containers.



2. Re-wet and repackage any damaged containers.
 3. Maintain at storage site an adequate supply of spare leak tight containers.
 4. Maintain at storage site an adequate supply of amended water.
 5. Keep ACW separate from any other waste.
 6. Keep ACW in a secured, enclosed, and locked container.
 7. If the asbestos abatement contractor has intention of sorting a quantity of ACW greater than or equal to 50 cubic yards, the Asbestos abatement contractor shall:
 - a. Submit a written request and receive written approval from the City.
- F. When presenting for transport, the asbestos abatement contractor shall:
1. Ensure that ACW has been sufficiently wetted down.
 2. Examine the integrity of the container's airtight seal.
 3. Re-wet and repackage any damaged containers.
 4. Keep ACW separate from all other waste.
 5. Ensure that a person transporting asbestos waste holds a valid permit issued pursuant to law.
 6. Frequency of Waste Removal:
 - a. Properly packaged and labeled asbestos waste shall be removed from the site on a daily basis. Under no circumstance shall asbestos waste be stored on site without written approval from the City. The Waste Hauler and landfill shall be as indicated on the notifications to regulatory agencies.
- G. Waste Load-out Through Equipment Decontamination Enclosure (Full Decontamination Facility): Place asbestos waste in disposal bags. Large items not able to fit into disposal bags shall be wrapped in one layer of 6-mil thick polyethylene sheeting. Clean outer covering of asbestos waste package by wet cleaning and/or HEPA-vacuuming in a designated part of the Work Area. Move wrapped asbestos waste to the equipment washroom, wet clean each bag or object and place it inside a second disposal bag, or a second layer of 6-mil polyethylene sheeting, as the item's physical characteristics demand. Air volume shall be minimized, and the bags or sheeting shall be sealed airtight with tape.



1. The clean containerized items shall be moved to the equipment decontamination enclosure holding area pending load-out to storage or disposal facilities.
 2. Workers who have entered the equipment decontamination enclosure system from the uncontaminated non-Work Area shall perform load-out of containers from the decontamination enclosure holding area. Dress workers moving asbestos waste to storage or disposal facilities in clean overalls of a color different than from that of coveralls used in the Work Area. Ensure that workers do not enter from uncontaminated areas into the equipment washroom or the Work Area. Ensure that contaminated workers do not exit the Work Area through the equipment decontamination enclosure system.
 3. Thoroughly clean the equipment decontamination enclosure system immediately upon completion of the waste load-out activities, and at the completion of each work shift.
 4. Labeled ACM waste containers or bags shall not be used for non-ACM debris or trash. Any materials placed in labeled containers or bags, including those turned “inside-out”, shall be handled and disposed of as ACM waste.
- H. All asbestos materials, wastes, shower water, polyethylene, disposable equipment and supplies shall be disposed of as asbestos contaminated waste, in accordance with the EPA regulation (40 CFR, Section 61.150) and those requirements of the New York Department of Environmental Conservation and New York City Department of Sanitation.
- I. All asbestos materials shall be prepared for transportation in accordance with this specification and all applicable Federal, State, County and City Regulations. asbestos abatement contractor shall submit the following documentation:
1. Where applicable, an EPA Generator's identification number which has been obtained from the EPA for all asbestos waste generated from the project.
 2. Applicable State Waste Hauler license and registration numbers.
 3. Federal Hazardous Materials Waste Hauler number.
 4. Designated landfill EPA Permit numbers.
- J. Prior to loading asbestos waste the enclosed cargo areas (dumpster) shall be prepared as follows:
1. Clean via HEPA-vacuum and wet wipe techniques the enclosed cargo areas of all visible debris prior to preparing with polyethylene.



2. Line the cargo area with two layers of 6-mil polyethylene sheeting to prevent contamination from damaged or leaking containers. Floor sheeting shall be installed first and extend up the walls a minimum of 24-inches. Wall sheeting shall be overlapped and taped securely into place.
- K. Asbestos-containing waste shall be placed on level surfaces in the cargo area of the dumpster and shall be packed tightly to prevent any shifting or tipping of the waste during transportation.
 - L. Asbestos-containing waste shall not be thrown into or dropped from the dumpster. All material shall be handled carefully to prevent rupture of the containers.
 - M. All personnel engaged in handling and loading of asbestos contaminated waste outside of the Work Area shall wear protective clothing. The disposable clothing shall include head, body and foot protection and color of clothing shall be different from abatement personnel in the Work Area. Minimum respiratory protection shall be half face, dual cartridge, air purifying respirators with HEPA-filters.
 - N. Asbestos abatement contractor shall immediately clean debris or residue observed on containers or surfaces outside of the Work Area. Cleaning shall be via HEPA equipped wet/dry vacuums only.
 - O. All asbestos-containing waste shall be transported from the abatement site to the landfill by a registered Waste Hauler. When transporting ACW:
 1. Ensure that the ACW has been sufficiently wetted down in a leak tight container.
 2. Re-wet and repackage any damaged containers.
 3. Maintain at storage site an adequate supply of spare leak tight containers.
 4. Maintain at storage site an adequate supply of amended water.
 5. Keep ACW separate from any other waste.
 - P. Keep ACW in a secured, enclosed, and locked container.
 - Q. Waste transport documents shall conform to the requirements of the U.S. Department of Transportation, Hazardous Materials Transportation Regulation, 49 CFR Part 173 and EPA 40 CFR 61.150 (d)(1)(2). Shipping documents shall be clearly marked with the required designation "RQ Asbestos". Asbestos abatement contractor shall provide a copy of this document to the City.



- R. A uniform hazardous waste manifest shall be prepared by the asbestos abatement contractor and signed by the asbestos abatement contractor each time the asbestos abatement contractor ships a dumpster load of Asbestos-Containing Waste Material. The uniform hazardous waste manifest shall include the site of waste generation, the names and addresses of the Transporter, the asbestos abatement contractor, and the landfill operator with information on the type and number of asbestos-waste containers, time and date. Asbestos abatement contractor shall provide the Construction Project Manager, Third-Party Air Monitor or authorized designated representative with signed copies of the waste manifest before each departure.
- S. Asbestos abatement contractor or his/her Waste Hauler shall transport asbestos-containing waste material from the abatement site directly to the specified disposal site. Asbestos abatement contractor or their Waste Hauler shall not accept material from any other site when transporting asbestos-containing waste material from the abatement site. The authorized DDC representative or Construction Project Manager reserves the right to travel with asbestos abatement contractor's Waste Hauler to the waste disposal site. No intermediate storage of waste material (i.e., asbestos abatement contractor's warehouse) shall be permitted.
- T. Final or progress application for payments will not be processed unless all hazardous waste manifests generated to date have been received and reviewed by the Construction Project Manager.
- U. All asbestos materials, wastes, shower water, polyethylene disposable equipment and supplies shall be disposed of as asbestos contaminated waste, in accordance with the EPA regulation (40 CFR, Section 61.150) and those requirements of the New York State Department of Environmental Conservation and the New York Department of Sanitation.
- V. Asbestos abatement contractor shall transport all sealed drums to a landfill disposal site approved by the Department of Environmental Conservation and the EPA. Transportation shall be performed by a New York State registered Waste Hauler, where required. When presenting the ACW for disposal the Asbestos abatement contractor or sub Asbestos abatement contractor shall:
1. Ensure that waste container is properly labeled according to the National Emission Standard for Hazardous Air Pollutants (NESHAP); Asbestos Revision, 40 CFR, Part 61, Subpart M. The labels shall include the name of the waste generator and the location where the waste was generated.
 2. Comply with all applicable orders issued pursuant to asbestos disposal.
 3. Ensure that ACW has been sufficiently wetted down.
 4. Re-wet and repackage any damaged containers.



5. Keep ACW separate from all other wastes.
- W. Asbestos abatement contractor shall notify the waste disposal site, at least 24 hours prior to transportation of asbestos contaminated waste to be delivered. Asbestos abatement contractor shall determine if a larger notification period is required.
- X. At the site asbestos abatement contractors or Waste Hauler trucks shall approach the dump location as close as possible for unloading asbestos waste. Containers shall be carefully placed in the ground. Do not throw containers from truck.
- Y. Asbestos abatement contractor or Waste Hauler shall inspect containers as they are unloaded at the disposal site. Material in damaged containers shall be repacked in empty containers, as necessary.
- Z. Asbestos abatement contractor or Waste Hauler shall not remove asbestos-containing waste Material from drums unless required to do so by the disposal site City. Used drums shall be disposed of as asbestos-asbestos contaminated waste.
- AA. All personnel engaged in unloading of the containers at the waste site shall wear protective clothing. The disposable clothing shall include head, body and foot protection. Minimum respiratory protection shall be half face, dual cartridge, air purifying respirators with HEPA-filters. Workers shall remove their protective clothing at the disposal site, place it in labeled disposal bags and leave them with the deposited waste shipment.
- BB. For the compaction operation, the asbestos abatement contractor shall ensure that disposal sites personnel have been provided with personal protective equipment by the disposal operator. If the disposal site City has not provided this protective equipment, the asbestos abatement contractor shall supply protective clothing and respiratory protection for the duration of this operation (PAPR respirators are mandatory).
- CC. If containers are broken or damaged, the asbestos abatement contractor or Waste Hauler shall, using personnel who are properly trained and wearing proper protective equipment, shall repackage the waste in properly labeled containers. Asbestos abatement contractor shall then clean the entire truck and its contents using HEPA-vacuums and wet cleaning techniques until no visible residue is observed.
- DD. Following the removal of all containerized waste, the asbestos abatement contractor shall decontaminate the truck cargo area using HEPA-vacuums and/or wet cleaning techniques until no residue is observed. All 6-mil polyethylene sheeting shall be removed and discarded as asbestos-containing waste material along with contaminated cleaning material and protective clothing, in containers at the disposal site.



- EE. The transporter(s) of all asbestos waste shall not back-haul any items on his return from landfill/disposal site.
- FF. All asbestos waste shall be disposed of in an approved Asbestos Landfill site only.
 - 1. NO PERSON UNDER ANY CIRCUMSTANCES SHALL ABANDON ACW. The same shall be disposed of only by certified persons in approved landfills.
 - 2. A manifest form will be signed by the Landfill documenting receipt and acceptance of the asbestos-containing waste. This manifest will be furnished to the City of New York within thirty calendar days from the project completion date.
 - 3. It is the responsibility of the Asbestos abatement contractor to determine current waste handling, transportation and disposal regulations for the work site and for each waste disposal landfill. The Asbestos abatement contractor must comply fully with these regulations and all appropriate U.S. Department of Transportation, EPA and other Federal, State and Local entities' regulations and all other current legal requirements.
 - 4. The asbestos abatement contractor shall obtain an agreement from the transporter (s) that the practice of "Back-Hauling" will not be engaged in, with respect to any and all waste loads taken from this site during the work.
 - 5. The asbestos abatement contractor will document actual disposal of the waste at the designated landfill by having completed a Disposal Certificate and will provide a copy of the same to the Department of Design and Construction.

PART 6 – ACCEPTANCE

6.01 ACCEPTANCE

Upon satisfactory completion of all decontamination procedures, a certificate will be issued by the Construction Project Manager with copies to all parties.

- A. A letter of Compliance stating that all the work on the project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations.
- B. All warranties as stated in the Specifications.

END OF SECTION 02 82 13



PAGE LEFT INTENTIONALLY BLANK



SECTION 04 20 00 - UNIT MASONRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Structural glazed brick.
2. Metal joint reinforcing, anchors, and related accessories for masonry.
3. Control joints in masonry, filled with joint fillers.
4. Chases, recesses, pockets and openings in masonry as required for installation of work.
5. Building in of items \ into masonry, including access doors, door frames, anchors, sleeves and inserts, and other similar items to be embedded in masonry.
6. Grouting in of metal items built into masonry work.
7. Protection, pointing and cleaning of masonry.

- B. Related Sections

1. Section 07 84 00 "Firestopping"
2. Section 07 92 00 "Joint Sealants"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

- B. Shop Drawings: Submit for:

1. Anchoring details.
2. Control and expansion joint locations and details.

- C. Samples (Submit the following):

1. Joint reinforcing, each type, width and proposed location (labeled).
2. Anchors, each type, width and proposed location (labeled).
3. Joint filler, each type.
4. Mortar color, 12" long cured sample.
5. Structural glazed brick.

- D. Manufacturer's Literature: Submit technical and installation information for:

1. Mortar materials, each material and mortar type.
2. Certification of mortar mix.



- E. Construction Procedures: Submit proposed procedures and materials for cleaning masonry work; including certification that cleaner will not adversely affect gaskets, sealants, etc.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Work of this Section must conform to the requirements of the following:
 - 1. 2011 "Building Code Requirements for Masonry Structures," (TMS 402-11/ACI 530-11/ASCE 5-11).
 - 2. 2011 "Specification for Masonry Structures," (TMS 602-11/ACI 530.1-11/ASCE 6-11).
 - 3. New York City Building Code – Version as listed on the drawings.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Store masonry units and mortar materials on raised platforms and under ventilated and waterproof cover.
- B. Masonry Units: Pack, deliver and store to prevent breakage, cracking, chipping, spalling or other damage. Store, protect and ventilate units at project site.
- C. Aggregate: Store with provisions for good drainage.
- D. Reinforcement and Anchors: Store and protect so that when placed, joint reinforcement and anchors will be free of soil, dirt, ice, loose rust, scale, or other coatings which would destroy or reduce bond with mortar and will not be disfigured or bent out of shape.

1.6 JOB CONDITIONS

- A. Stain Prevention: Prevent grout, mortar, and soil from staining the face of masonry to be left exposed. Immediately remove grout, mortar, and soil that come in contact with such masonry.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Structural Glazed Brick
 - 1. Pattern or Type: As detailed and required (running bond or stack bond).
 - 2. Characteristics:
 - a. Meet ASTM C1405, Grade S, Type I & II, Class Exterior.
 - b. Must meet ASTM C84 (UL723) requirements and rated zero flame spread, zero smoke developed and zero fuel contribution. Also must not release any toxic or noxious fumes when burned at 2000°F.
 - c. Shapes: Furnish as shown on the plans in accordance with manufacturer's current standard production. All external corners, provide square sills and jambs unless otherwise noted. Provide square lintels and internal corners unless otherwise noted. The base course is straight as shown on the drawings.
 - d. Size: 7 5/8" x 7 5/8" x 7 5/8"



3. Basis-of-Design Product: Subject to compliance with requirements, provide Elgin Butler Company; 8-Square (4W Series), #4444 Storm Cloud color, glazed on two faces or comparable product by one of the following:
 - a. Echelon Masonry,
 - b. Belden Brick,
 - c. Rausch Clay Sales,
 - d. Or approved equal.

B. Joint Reinforcing for Masonry Walls

1. For interior block walls and partitions, provide standard reinforcing fabricated of 9 ga. side and cross rods, truss or ladder design, no ties, spaced every other block course. Provide prefabricated pieces at corners and intersections of walls or partitions. Provide mill galvanized reinforcing conforming to ASTM A 641, Class B-1, applied after fabrication.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1). Hohmann & Barnard
 - 2). Heckmann Building Products
 - 3). Wire-Bond
 - 4). Or approved equal
2. Wire used in assemblies noted above must be cold drawn steel wire conforming to ASTM A 82.

C. Anchors

1. Wire Mesh: Galvanized sixteen (16) gauge steel wire, 1/4" square mesh, width 1/2" less than wall thickness, by length to suit condition.
2. For anchoring masonry to structural steel, provide hot-dip galvanized steel anchors. Galvanizing must conform to ASTM A 153, with zinc coating of 1.5 oz. of zinc per sq. ft.
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1). Hohmann & Barnard
 - 2). Heckmann Building Products
 - 3). Wire-Bond
 - 4). Or approved equal
3. For anchoring CMU interior partitions to underside of steel beams, provide hot dip galvanized steel partition top anchors.
 - a. Product: Subject to compliance with requirements, provide one of the following:
 - 1). Heckmann Building Products; No. 419 and No. 421
 - 2). Hohmann & Barnard; No. PTA 420
 - 3). Wire-Bond; PTA #4301
 - 4). Or approved equal.



4. For anchoring CMU interior partitions to underside of structural deck, provide 4" x 4" x 1/4" galvanized steel angles (ASTM A 36), 3'-0" long spaced 3'-0" o.c. alternately on each side of partition. Anchor partition securely to structural deck.

D. Reinforcing Bars and Rods: ASTM A 615, Grade 60. See Drawings for size.

E. Control Joint Fillers

1. Vertical Installation Within Concrete Masonry Wall: Extruded high grade neoprene rubber, cross shape, for use with concrete masonry sash units, which provides a force fit in the grooves of the sash block, and has 1/2" diameter tubular ends (compressed 25% when installed in 3/8" wide joint).
 - a. Provide the following sizes:
 - 1). 2-5/8" wide control joint fillers for 4" block walls.
 - 2). 4-5/8" wide for 6" block walls.
 - 3). 6-5/8" wide for 8" block walls.
 - b. Provide backer rod and sealant joint over joint filler as per drawings and Section 07 92 00, Joint Sealants.
2. Isolation Joint Filler at Abutting Construction and at Intersecting CMU Walls: Compressible and resilient closed cell neoprene gasket with pressure sensitive adhesive backing, thickness 30% greater than thickness of joint. Recess joint filler and install backer rod and sealant as per drawings and Section 07 92 00, Joint Sealants.

F. Neoprene Joint Filler: Provide closed cell neoprene, Type NN-1, conforming to ASTM D 1056, Grade 1, high performance

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Williams Products Inc.
 - b. D. S. Brown
 - c. Norton
 - d. Or approved equal.

G. Masonry Cleaner

1. Basis-of-Design Product: Subject to compliance with requirements, provide ProSoCo Inc.; Vana Trol or comparable product by one of the following:
 - a. Diedrich
 - b. EaCo Chem, Inc.
 - c. Or approved equal.

2.2 MORTAR MATERIALS

A. Portland Cement: ASTM C 150, Type 1, standard color, one source.

B. Hydrated Lime: ASTM C 207, Type S.

C. Aggregate for Mortar: Clean, washed, buff colored sand, graded per ASTM C 144.



- D. Aggregate for Grout: ASTM C 404.
- E. Water: Clean, fresh and suitable for drinking.

2.3 MORTAR MIX

- A. Interior Masonry Construction: Provide Portland cement/lime mortar conforming to ASTM C 270, Type N; for load bearing conditions, provide mortar conforming to ASTM C 270, Type M.
- B. Reinforced Concrete Block: Provide Portland cement/lime mortar conforming to ASTM C 270, Type S.
- C. Grout for Unit Masonry: Comply with ASTM C 476 for grout for use in construction of unit masonry. Use grout of consistency (fine or coarse) at time of placement which will completely fill all spaces intended to receive grout. Provide grout with a minimum compressive strength of 3000 psi when tested in accordance with ASTM C 1019.
- D. Mixing
 - 1. General: Add cement just before mixing and mix dry. Use sufficient amount of water as necessary to produce workable mix. Mix in small batches to make plastic mass.
 - 2. Mixing: Machine mix all mortars in approved type mixer with device to accurately and uniformly control water. Add hydrated lime dry. Mix dry materials not less than two (2) minutes. Add water, then mix not less than three (3) minutes, not to exceed five (5) minutes. Mix only amount of mortar that can be used before initial set. Do not use mortar which has reached its initial set or two (2) hours after initial mixing, whichever comes earlier. Mortar may not be re-tempered. Clean mixer for each batch, whenever mortar type is changed, and at end of each day's work.
 - 3. Acceleration or other admixtures not permitted.
 - 4. Provide mortar with a flow after suction of not less than seventy-five (75) percent of that immediately after mixing as determined by ASTM C 91.
- E. Admixtures
 - 1. Do not use air-entraining admixtures or cementitious materials containing air-entraining admixtures in the mortar.
 - 2. Do not use antifreeze compounds or other substances in the mortar to lower the freezing point.
 - 3. Do not use calcium chloride or admixtures containing calcium chloride in mortar.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

A. General

- 1. Build single wythe walls to the actual thickness of the masonry units, using units of nominal thickness shown.
- 2. Build chases and recesses as shown or required for the work of other trades.



3. Leave openings for equipment to be installed before completion of masonry work. After installation of equipment, complete masonry work to match work immediately adjacent to the opening.
4. Lay out walls in advance for accurate spacing of surface bond patterns with uniform joint widths and to properly locate openings, movement type joints, returns and off-sets. Avoid the use of less than half size units at corners, jambs and wherever possible.
5. Lay up walls plumb and true with courses level, accurately spaced and coordinated with other work.
6. Pattern Bond: Lay exposed masonry patterns as noted on drawings. If not shown, provide running bond. Do not use units of less than four (4) inches horizontal face dimensions at corners or jambs.
7. Where possible, build masonry walls and partitions after all overhead ducts, pipes and conduits are in place and tested. Neatly build masonry around the items above. Walls and partitions must be plumb, true to line and free from defects such as open cells, voids, dry joints and other similar defects. In rooms and spaces scheduled to have concrete block finish, make all such surfaces, including upper wall surfaces up to termination of structural ceiling in spaces without suspended ceilings, suitable for paint application. Cut openings in walls and partitions in place only with the approval of the Commissioner.

B. Mortar Bedding and Jointing

1. Lay masonry units with full mortar coverage on horizontal and vertical face shells.
2. Lay masonry walls with 3/8" joints unless otherwise shown on drawings.
3. Tool exposed joints slightly concave. Concealed joints must be struck flush.
4. Remove masonry units disturbed after laying; clean and reset in fresh mortar. Do not pound corners at jambs to fit stretcher units which have been set in position. If adjustments are required, remove units, clean off mortar and reset in fresh mortar.

C. Built-In Work

1. As the work progresses, build in items located within masonry construction. Fill in solidly with masonry around built-in items.
2. Mortar in door frames, access doors, louvers and other metal items embedded or built into masonry work solidly with mortar as the masonry units are laid up.
3. Grout under lintels, bearing plates, and steel bearing on masonry with solid bed grout.
4. Seal sleeves, pipes, ducts and all other items which pass through masonry walls with interior grade sealant meeting requirements of Section 07 92 00 Joint Sealants, so as to be air tight and prevent air leakage. Refer to Section 07 84 00 Firestopping for packing of voids in rated masonry walls.
5. Fill vertical cells of masonry units solid with grout which have anchoring, reinforcing rods, supporting or hanging devices embedded in the cell, including stone anchors and window or curtain wall anchors.
6. Fill vertical cells of masonry units solid with mortar on each side of door frames to sixteen (16) inches beyond.
7. Unless otherwise noted, fill vertical cells of masonry units solid with grout which are below steel bearing plates, steel beams, and ends of lintels, to eight (8) inches beyond bearing and from floor to bearing.
8. Place wire mesh in horizontal joint below masonry unit cells to be filled with mortar, to prevent mortar from dropping into unfilled cells below.
9. Fill all voids solid with grout in masonry indicated as being reinforced. Consolidate grout in place by vibration or other methods which ensure complete filling of cells. When the least clear dimension of the grouted cell is less than two (2) inches, the maximum height of grout pour must not exceed twelve (12) inches. When the least clear dimension is two (2) inches or more, maximum height of grout pour must not exceed forty-eight (48) inches. When grouting is stopped for one (1) hour or longer, the grout pour must be stopped 1-1/2" below the top of a masonry unit. Accurately place vertical bar reinforcing,



hold in position before grouting starts and while being grouted. All such reinforcing must have a minimum clear cover of 5/8". Lap all bars a minimum of forty (40) bar diameters and provide steel spacer ties (not to exceed 192 bar diameter) to secure and position all vertical steel and prevent displacement during grouting. Provide continuous horizontal reinforcement embedded in mortar joints every second course.

D. Cutting and Patching

1. Accurately cut to size with motorized carborundum or diamond saw all exposed masonry which requires cutting or fitting, producing cut edges.
2. Neatly drill holes made in exposed masonry units to proper size for attachment of handrail brackets and similar items.
3. All masonry which requires patching in exposed work, if approved by Commissioner, must be patched neatly with mortar to match appearance of masonry as closely as possible and to the Commissioner's satisfaction. Rake back joints and use pointing mortar to match as required.

E. Interior Block Partitions

1. Build to full height unless otherwise shown on drawings. At non-rated partitions, fill void between CMU and structural deck with continuous neoprene filler conforming to the requirements of Article 2.1 herein. At fire rated partitions, fill void with fire stop material meeting the requirements of Section 07 84 00, Firestopping. Fasten to structure at top of partition using steel angles as specified herein.
2. Provide continuous horizontal joint reinforcing every other block course, except as otherwise noted. Fully embed longitudinal side rods in mortar for their entire length with a minimum cover of 5/8". Lap reinforcement a minimum of six (6) inches at ends of units.
3. Provide continuity at corners and wall intersections by use of prefabricated "L" and "T" sections. Cut and bend units as directed by manufacturer for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.
4. Corners
 - a. Provide interlocking masonry unit bond in each course at corners.
 - b. Provide continuity at corners with prefabricated "L" reinforcement units, in addition to masonry bonding.
5. Intersecting and Abutting Walls
 - a. Unless vertical control joints are shown as part of structural frame, provide interlocking masonry bond. Provide starters and special shapes as shown on the drawings to bond these walls.
 - b. In addition to masonry bonding, provide horizontal reinforcement using prefabricated "T" units at interior partitions.

F. Anchoring Masonry to Structure: Provide an open space not less than 1/2" in width between masonry and structural member, unless otherwise shown. Keep open space free of mortar or other rigid materials.

G. Control Joints: Provide vertical control and isolation joints in masonry as shown. Build in related items as the masonry work progresses.



1. Control Joint Spacing: If location of control joints is not shown, place vertical joints spaced not to exceed 20'-0" o.c. In addition, locate joints at points of natural weakness in the masonry work, including the following:
 - a. At structural column or joint between bay.
 - b. Above control joints in the supporting structure.
 - c. Above major openings at end of lintels upward and below at ends of sills downward. Place at one side of jamb for openings not less than 7'-0" wide and at both sides for openings over 6'-0" wide.
 - d. At reduction of wall thickness.
 - e. Where masonry abuts supporting structure.
 - f. If additional joints are required, indicate them on approved shop drawings.

3.3 CLEANING, PROTECTION, ADJUSTMENT

A. Protection

1. Take adequate precautions for the protection of all surfaces against mortar spatter. Immediately remove any such spatter should it inadvertently occur, leaving no stain or discoloration
2. Wipe excess mortar off masonry surfaces as work progresses.
3. Place wood coverings over all such masonry surfaces as are likely to be damaged during the progress of the entire project.
4. Perform protective measures in a manner satisfactory to the Commissioner.
5. Replace damaged masonry units to satisfaction of the Commissioner.

B. Cleaning of Masonry: Upon completion, thoroughly clean all exposed masonry following recommendations of the BIA Technical Note No. 20. Before applying any cleaning agent to the entire wall, apply it to a sample wall area of approximately 4' x 4' in a location approved by the Commissioner. No further cleaning work may proceed until the sample area has been approved by the Commissioner, after which time the same cleaning materials and method may be used on the remaining wall area. If stiff brushes and water do not suffice, thoroughly saturate the surface with clear water and then scrub with a solution of an approved detergent masonry cleaner, mixed as per manufacturer's directions, followed immediately by a thorough rinsing with clear water. Thoroughly protect all lintels and other corrodible parts during cleaning.

1. Unless otherwise required by cleaning agent manufacturer use only low pressure device (30 to 50 psi) for application of cleaning agent and water rinsing.

C. Pointing: Point any defective joint with mortar identical with that specified for that joint.

END OF SECTION 04 20 00



SECTION 05 50 00 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section includes:

1. Rough hardware.
2. Light steel framing and supports, not included as part of work of other trades.
3. Miscellaneous steel trim.
4. Countertop supports.
5. Holding pen steel bars.
6. Custom, non-decorative metal items.
7. Steel framing, bracing, supports, anchors, bolts, shims, fastenings, and all other supplementary parts indicated on drawings or as required to complete each item of work of this Section.
8. Prime painting, touch-up painting and separation of dissimilar metals for work of this Section.
9. Cutting, fitting, drilling and tapping work of this Section to accommodate work of other Sections and of concrete, masonry or other materials as required for attaching and installing work of this Section.

B. Related Sections

1. Section 06 10 00 "Rough Carpentry"
2. Section 09 90 00 "Painting and Coating"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Manufacturer's Literature: Submit manufacturer's specifications, load tables, dimension diagrams, anchor details and installation instructions for products to be used in the fabrication of miscellaneous metal work, including paint products.
- C. Shop Drawings: Shop drawings for the fabrication and erection of all assemblies of miscellaneous iron work which are not completely shown by manufacturer's data sheets. Include plans and elevations at not less than 1" to 1'-0" scale and include details of sections and connections at not less than 3" to 1'-0" scale. Show anchorage and accessory items.
1. Indicate welding on shop drawings using AWS symbols and showing length, size and spacing (if not continuous). Show auxiliary views to clarify all welding. Notes such as 1/4" weld, weld and tack weld are not acceptable.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".



- B. Shop Assembly: Pre-assemble items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- C. Reference Standards: The work is subject to requirements of applicable portions of the following standards:
 - 1. AISC "Manual of Steel Construction"
 - 2. AWS D1.1 "Structural Welding Code"
 - 3. SSPC SP-3 "Surface Preparation Specification No. 3, Power Tool Cleaning"
 - 4. SSPC PA-1 "Painting Application Specification"
 - 5. "Handbook on Bolt, Nut and Rivet Standards," Industrial Fasteners Institute.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Metals

- 1. Metal Surfaces, General: For fabrication of miscellaneous metal work which will be exposed to view, use only materials which are smooth and free of surface blemishes including pitting, seam marks, roller marks, rolled trade names and roughness.
- 2. Steel Plates, Shapes and Bars: ASTM A 36.
- 3. Steel Tubing: Cold formed, ASTM A 500; or hot rolled, ASTM A 501.
- 4. Structural Steel Sheet: Hot rolled, ASTM A 570; or cold rolled, ASTM A 611, Class 1; of grade required for design loading.
- 5. Galvanized Structural Steel Sheet: ASTM A 924, of grade required for design loading. Coating designation G90.
- 6. Steel Pipe: ASTM A 53, type and grade as selected by fabricator and as required for design loading; black finish unless galvanizing is indicated; standard weight (Schedule 40), unless otherwise indicated.
- 7. Gray Iron Castings: ASTM A 48, Class 30, unless another class is indicated or required by structural loads.
- 8. Malleable Iron Castings: ASTM A 47, grade as selected by fabricator.
- 9. Brackets, Flanges and Anchors: Cast or formed metal of the same type material and finish as supported rails, unless otherwise indicated.
- 10. Concrete Inserts: Threaded or wedge type; galvanized ferrous castings, either malleable iron, ASTM A 47, or cast steel, ASTM A 27. Provide bolts, washers and shims as required, hot-dip galvanized, ASTM A 153.

- B. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107.

C. Fasteners

- 1. General: Provide zinc-coated fasteners for exterior use or where built into exterior walls. Select fasteners for the type, grade and class required.
- 2. Bolts and Nuts: Regular hexagon head type, ASTM A 307, Grade A.
- 3. Anchor Bolts: ASTM F 1554, Grade 36.
- 4. Lag Bolts: ASME B18.2.1.
- 5. Machine Screws: ASME B18.6.3.



6. Plain Washers: Round, carbon steel, ASME B18.22.1.
7. Masonry Anchorage Devices: Expansion shields, FS FF-S-325.
8. Toggle Bolts: Tumble-wing type, FS FF-B-588, type, class and style as required.
9. Lock Washers: Helical spring type carbon steel, ASME B18.21.1.

D. Shop Paint: Shop prime all non-galvanized miscellaneous metal items using Series 88 Azerox Primer made by Tnemec, ICI Devco "Rust Guard" quick dry alkyd shop coat No. 41403, "Interlac 393" by International Protection Coatings, or approved equal.

E. Bituminous Paint: Cold applied asphalt emulsion complying with ASTM D 1187.

F. Galvanizing Repair Coating: For touching up galvanized surfaces after erection, provide repair coating that is V.O.C. compliant, equal to "Silver Galv" by Z.R.C. Worldwide, "Brite Zinc" by Brite Products, "ZiRP" by Duncan Galvanizing Corp., or approved equal. Apply to a dry film thickness of 1.5 to 3.0 mils.

2.2 PRIME PAINTING

A. Scope: All ferrous metal (except galvanized steel) must be cleaned and shop painted with one coat of specified ferrous metal primer. No shop prime paint required on galvanized steel or aluminum work.

B. Cleaning: Conform to Steel Structures Painting Council Surface Preparation Specification SP 3 (latest edition) "Power Tool Cleaning" for cleaning of ferrous metals which are to receive shop prime coat.

C. Application

1. Apply shop prime coat immediately after cleaning metal. Apply paint in dry weather or under cover. Metal surfaces must be free from frost or moisture when painted. Paint all metal surfaces including edges, joints, holes, corners, etc.
2. Paint surfaces which will be concealed after shop assembly prior to such assembly. Apply paint in accordance with approved paint manufacturer's printed instructions, and the use of any thinners, adulterants or admixtures must be only as stated in said instructions.
3. Paint must uniformly and completely cover the metal surfaces, 2.0 mils minimum dry film thickness. No work may be shipped until the shop prime coat thereon has dried

D. Touch-Up: In the shop, after assembly and in the field, after installation of work of this Section, touch-up damaged or abraded portions of shop prime paint with specified ferrous metal primer.

E. Apply one shop coat to fabricated metal items, except apply two (2) coats of paint to surfaces inaccessible after assembly or erection. Change color of second coat to distinguish it from the first.

2.3 PROTECTIVE COATINGS

A. Whenever dissimilar metals will be in contact, separate contact surfaces by coating each contact surface prior to assembly or installation with one coat of specified bituminous paint, in addition to the specified shop prime paint. Mask off those surfaces not required to receive protective coating.

2.4 WORKMANSHIP

A. General



1. Miscellaneous metal work must be fabricated by an experienced fabricator or manufacturer and installed by an experienced tradesman.
 2. Materials, methods of fabrication, fitting, assembly, bracing, supporting, fastening, operating devices, and erection must be in accordance with drawings and specifications, approved shop drawings, and best practices of the industry, using new and clean materials as specified, having structural properties sufficient to safely sustain or withstand stresses and strains to which materials and assembled work will be subjected.
 3. All work must be accurately and neatly fabricated, assembled and erected.
- B. Shop Assembly: Insofar as practicable, fitting and assembly of work must be done in shop. Shop assemble work in largest practical sizes to minimize field work. Ensure that the shop-fabricated miscellaneous metal items will properly fit the field condition. In the event that shop-fabricated miscellaneous metal items do not fit the field condition, the item must be returned to the shop for correction.
- C. Cutting: Cut metal by sawing, shearing, or blanking. Flame cutting will be permitted only if cut edges are ground back to clean, smooth edges. Make cuts accurate, clean, sharp and free of burrs, without deforming adjacent surfaces or metals.
- D. Holes: Drill or cleanly punch holes; do not burn.
- E. Connections: Make connections with tight joints, capable of developing full strength of member, flush unless indicated otherwise, formed to exclude water where exposed to weather. Locate joints where least conspicuous. Unless indicated otherwise, weld or bolt shop connections; bolt or screw field connections. Provide expansion and contraction joints to allow for thermal movement of metal at locations and by methods approved by the Commissioner.
1. Welding
 - a. Must be in accordance with AWS D1.1 Structural Welding Code of the American Welding Society, and must be done with electrodes and/or methods recommended by the manufacturer of the metals being welded.
 - b. Provide continuous welds except where spot welding is specifically permitted. Welds exposed to view must be ground flush and dressed smooth with and to match finish of adjoining surfaces; undercut metal edges where welds are required to be flush.
 - c. All welds on or behind surfaces which will be exposed to view must be done so as to prevent distortion of finished surface. Remove weld spatter and welding oxides from all welded surfaces.
 2. Bolts and Screws: Make threaded connections tight with threads entirely concealed. Use lock nuts. Bolts and screw heads exposed to view must be flat and countersunk. Cut off projecting ends of exposed bolts and screws flush with nuts or adjacent metal.
- F. Operating Mechanism: Operating devices (i.e. pivots, hinges, etc.) mechanism and hardware used in connection with this work must be fabricated, assembled, installed and adjusted after installation so that they will operate smoothly, freely, noiselessly and without excessive friction.
- G. Built-In Work: Furnish anchor bolts, inserts, plates and any other anchorage devices, and all other items specified under this Section to be built into concrete, masonry or work of other trades, with necessary templates and instructions, and in ample time to facilitate proper placing and installation.



- H. Supplementary Parts: Provide as necessary to complete each item of work, even though such supplementary parts are not shown or specified.
- I. Coordination: Accurately cut, fit, drill and tap work of this Section to accommodate and fit work of other trades. Furnish or obtain, as applicable, templates and drawings to or from applicable trades for proper coordination of this work.
- J. Exposed Work
 - 1. In addition to requirements specified herein and shown on drawings, all surfaces exposed to view must be clean and free from dirt, stains, grease, scratches, distortions, waves, dents, buckles, tool marks, burrs, and other defects which mar appearance of finished work.
 - 2. Metal work exposed to view must be straight and true to line or curve, smooth arrises and angles as sharp as practicable, miters formed in true alignment, profiles accurately intersecting, and with joints carefully matched to produce continuity of line and design.
 - 3. Exposed fastenings, where permitted, must be of the same material, color and finish as the metal to which applied, unless otherwise indicated, and must be of the smallest practicable size.

2.5 MISCELLANEOUS METALS ITEMS

- A. Rough Hardware
 - 1. Furnish bent or otherwise custom fabricated bolts, plates, anchors, hangers, dowels and other miscellaneous steel and iron shapes as required for framing and supporting woodwork, and for anchoring or securing woodwork to concrete or other structures. Straight bolts and other stock rough hardware items are specified in Section 06 10 00, Rough Carpentry.
 - 2. Fabricate items to sizes, shapes and dimensions required. Furnish malleable iron washers for heads and nuts which bear on wood connections; elsewhere, furnish steel washers.
- B. Miscellaneous Light Steel Framing
 - 1. Light steel framing, bracing, supports, framing, clip angles, shelf angles, plates, etc., must be of such shapes and sizes as indicated on the drawings and details or as required to suit the condition and must be provided with all necessary supports and reinforcing such as hangers, braces, struts, clip angles, anchors, bolts, nuts, welds, etc., as required to properly support and rigidly fasten and anchor same in place and to steel, concrete, masonry and all other connecting and adjoining work.
 - 2. All light steel framing steel must be furnished and erected in accordance with the applicable requirements of the "Specifications for the Design, Fabrication and Erection of Structural Steel for Buildings" by the American Institute of Steel Construction and as specified herein.
- C. Miscellaneous Steel Trim: Provide shapes and sizes for profiles shown. Except as otherwise indicated, fabricate units from structural steel shapes and plates and steel bars, with continuously welded joints and smooth exposed edges. Use concealed field splices wherever possible. Provide cutouts, fittings and anchorages as required for coordination of assembly and installation with other work.
- D. Countertop Supports: Steel framing as indicated or required to support countertops. Conceal framing under countertops and within wall behind countertops. Provide supports to withstand a concentrated load of not less than three hundred (300) lbs. applied at any point with a deflection not to exceed L/240 for the length of the countertop.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. **Fastening to In-Place Construction:** Provide anchorage devices and fasteners where necessary for securing miscellaneous metal fabrications to in-place construction; including threaded fasteners for concrete and masonry inserts, toggle bolts, through-bolts, lag bolts, wood screws, and other connectors as required.
- B. **Cutting, Fitting and Placement:** Perform cutting, drilling and fitting required for installation of miscellaneous metal fabrications. Set work accurately in location, alignment and elevation, plumb, level, true and free of rack, measured from established lines and levels. Provide temporary bracing or anchors in formwork for items which are to be built into concrete, masonry, or similar construction.
- C. **Fitting Connections:** Fit exposed connections accurately together to form tight hairline joints. Weld connections which are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Grind exposed joints smooth and touch up shop paint coat. Do not weld, cut or abrade the surfaces of exterior units which have been hot dip galvanized after fabrication, and are intended for bolted or screwed field connections.
- D. **Field Welding:** Comply with AWS D1.1 for procedures of manual shielded metal-arc welding, appearance, and quality of welds made, and methods used in correcting welding work.
- E. **Touch-Up Painting:** Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with same material as used for shop painting. Apply by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- F. **Field Touch-Up of Galvanized Surfaces:** Touch-up shop applied galvanized coatings damaged during handling and installation. Use galvanizing repair coating specified herein for galvanized surfaces.

END OF SECTION 05 50 00



SECTION 05 70 00 - DECORATIVE METALS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Stainless steel sheets.
2. Stainless steel shelving.
3. Stainless steel toilet partition at holding pen.
4. Polished stainless steel mirrors.
5. Brass sheets, tubing and edges and trim for tile.
6. Aprons for sink and trash enclosure.
7. Engraved metal signage.
8. Powder coated steel frame.
9. Custom powder coated signage.
10. Light shelf / daylight reflector.
11. Benches.
12. Printed aluminum graphic panels.

- B. Related Sections

1. Section 05 50 00 "Metal Fabrications"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Shop Drawings: Submit for all items of work of this Section, as enumerated under paragraph 1.2A, showing locations, layouts, materials, thicknesses, finishes, dimensions, construction, relation to adjoining construction, erection details, profiles, jointing and all other details to fully illustrate the work of this Section.
- C. Samples: Submit fabricated samples (of sufficient size to fully show construction, materials and finishes) of all items of work as enumerated under paragraph 1.2A herein.
- D. Product Data: Submit manufacturer's, fabricator's and finisher's specifications and installation instructions for products used in ornamental metal work, including finishing materials and methods.
- E. Samples for Verification: For each type of exposed finish required, prepared on 6-inch square samples of metal of same thickness and material indicated for the Work or profile of Work.



- F. Contractor Licensed Engineer Submittal: For installed products indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer licensed in the State of New York responsible for their preparation.
- G. Coordination Drawings: For decorative formed metal elements that house items specified in other Sections. Show dimensions of housed items, including locations of housing penetrations and attachments and necessary clearances.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Shop Assembly: Insofar as practicable, fitting and assembly of work must be done in shop. Work that cannot be permanently shop assembled, must be completely assembled, marked and disassembled in shop before shipment to ensure proper assembly in field. Shop assemble work in largest practical sizes to minimize field work. Ensure that the shop fabricated items will properly fit the field condition. In the event that shop fabricated items do not fit the field condition, the item will be returned to the shop for correction.
- C. Mockups
 - 1. Benches.
 - 2. Portals with aluminum printed panel with z-clips attached to plywood substrate.
 - 3. Sink assembly with apron.

1.5 COORDINATION

- A. Coordinate installation of anchorages for decorative formed metal items. Furnish setting drawings, templates and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts and items with integral anchors, that are to be embedded in concrete to masonry. Deliver such items to Project site in time for installation.
- B. Coordinate installation of decorative formed metal with adjacent construction to ensure that wall assemblies, flashings, trim and joint sealants, are protected against damage from the effects of weather, age, corrosion and other causes.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Provide materials which have been selected for their surface flatness, smoothness and freedom from surface blemishes where exposed to view in the finished unit. Surfaces exposed to view that exhibit pitting, seam marks, roller marks, oil-canning, stains, discolorations, or other imperfections on the finished units will not be acceptable.
- B. Printed Aluminum Graphic Panels
 - 1. Dye-sublimated metal prints: A specially coated paper printed on a dye-sublimation press is transferred to a separate press that heats the print against the face of the metal at 400 degrees F. As the water in the



ink evaporates, the ink transitions from a solid to gaseous state. After the metal cools, the ink becomes permanent and scratch-resistant—no lamination needed.

2. Finish: Matte
 3. Print: Custom as selected by Commissioner.
- C. Stainless Steel: Comply with the following standards for the forms and types of stainless steel for the required items of work.
1. Pipe: ASTM A 312, Grade TP 304.
 2. Sheet, Strip, Flat Bar and Plate: ASTM A 666, Type 304.
 3. Tubing: ASTM A 554, Grade MT 304.
 4. Castings: ASTM A 743A, Grade CF 8 or CF 20.
 5. Bars and Shapes: ASTM A 276, Type 304.
 6. Rods at level 2: solid bar, up to 42" A.F.F.
- D. Exposed Steel (cold rolled)
1. Structural Shapes and Sheets: ASTM A 1008.
 2. Strip: ASTM A 109.
- E. Steel (Carbon) for Concealed Supports Only
1. Structural Shapes: ASTM A 36.
 2. Plates (for forming or bending cold): ASTM A 283, Grade C.
 3. Steel Sheets: ASTM A 366, Grade 1.
- F. Brass
1. Comply with the following standards for the forms and types of brass for the required items of work.
 - a. Temper: Provide brass materials in standard commercial tempers and hardness, as required for fabrication, strength and durability.
 - b. Plate, Sheet, Strip and Bars: ASTM B 36, Alloy UNS No. C26000 (cartridge brass, 70 percent bronze).
 - c. Seamless Tubes: ASTM B 135; Alloy UNS No. C26000 (cartridge brass, 70 percent bronze).
 - d. Extruded Shapes: ASTM B 249, Alloy UNS C36000 (free cutting brass).
 - e. Sand Castings: ASTM B 584, Alloy UNS No. C85200 (high copper yellow brass).
- G. Welding Electrodes and Filler Metal: Type and alloy of filler metal and electrodes as recommended by producer of the metal to be welded, and as required for color match, strength and compatibility in the fabricated items.
- H. Fasteners: Furnish basic metal and alloy, matching finished color and texture as the metal being fastened, unless otherwise indicated. Provide Phillips square drive screws for exposed fasteners, unless otherwise indicated.



- I. Anchors and Inserts: Either furnish inserts to be set in concrete or masonry work, or provide other anchoring devices as required for the installation of ornamental metal items. Provide toothed steel or lead shield expansion bolt devices for drilled-in-place anchors.
 - 1. Provide units with exposed surfaces matching the texture and finish of the metal item anchored.
- J. Bituminous Paint: SSPC-Paint 12 (cold-applied asphalt mastic).
- K. Cast-in-Place and Preinstalled Anchors: Anchors fabricated from corrosion-resistant materials with capability to sustain, without failure, a load equal to six times the load imposed when installed in unit masonry and equal to four times the load imposed when installed in concrete.
- L. Sealants, Interior: Nonsag, paintable, nonstaining, latex sealant complying with ASTM C834; of type and grade required to seal joints in decorative formed metal; and as recommended in writing by decorative formed metal manufacturer.
- M. Filler Metal and Electrodes: Provide type and alloy of filler metal and electrodes as recommended by producer of metal to be welded or brazed and as necessary for strength, corrosion resistance, and compatibility in fabricated items.
 - 1. Use filler metals that will match the color of metal being joined and will not cause discoloration.

2.2 FABRICATION

- A. Cutting: Cut metal by sawing, shearing or blanking. Flame cutting will be permitted only if cut edges are ground back to clean, smooth edges. Make cuts accurate, clean, sharp, square and free of burrs, without deforming adjacent surfaces or metals.
- B. Holes: Drill or cleanly punch holes (do not burn), so that holes will be accurate, clean, neat and sharp without deforming adjacent surfaces or metals.
- C. Connections
 - 1. Make connections with tight joints, capable of developing full strength of member, flush unless indicated otherwise, formed to exclude water where exposed to water. Locate joints where indicated on drawings. Provide connections to allow for thermal movement of metal at locations and by methods approved by the Commissioner. For work exposed to view, use concealed fasteners (unless welded or other connections indicated) with joints accurately fitted, flush and rigidly secured with hairline contacts.
 - 2. Brazing (for Brass and Bronze): Brazing must be in accordance with recommendations of the producer of the metal, using type and alloy of filler metal and electrodes as required for color match, strength and compatibility in the fabricated items. Brazing must be continuous. Brazed surfaces exposed to view must be ground flush and dressed smooth with and to match finish of adjoining surfaces so that joint will not be visible; undercut metal edges where brazed surfaces are required to be ground flush and dressed smooth. All brazed surfaces on or behind surfaces which will be exposed to view must be done so that finished surface will be free of imperfections such as pits, runs, splatter, cracks, warping, dimpling, depressions or other forms of distortion or discoloration. Remove splatter and oxides from all brazed surfaces.
 - 3. Welding: Welding must be in accordance with recommendations of the American Welding Society and must be done with electrodes and/or methods recommended by the manufacturers of the metals



- being welded. Welds must be continuous, except where spot welding is specifically permitted. Welds exposed to view must be ground flush and dressed smooth with and to match finish of adjoining surfaces so that joint will not be visible; undercut metal edges where welds are required to be ground flush and dressed smooth. All welds on or behind surfaces which will be exposed to view must be done so that finished surface will be free of imperfections such as pits, runs, splatter, cracks, warping, dimpling, depressions or other forms of distortion or discoloration. Remove weld splatter and welding oxides from all welded surfaces.
4. Bolts and Screws: Make threaded connections tight with threads entirely concealed. Use lock nuts. Bolts and screw heads, where shown to be exposed to view, must be flat and countersunk. Cut off projecting ends of exposed bolts and screws flush with nuts of adjacent metal.
- D. Operating Mechanism: Operating devices, mechanism and hardware used in connection with this work must be fabricated, assembled, installed and adjusted after installation so that they will operate smoothly, freely, noiselessly and without excessive friction.
 - E. Built-In Work: Furnish anchor bolts, inserts, plates and any other anchorage devices, and all other items for architectural metal work to be built into concrete, masonry, or work of other trades, with necessary templates and instructions, and in ample time to facilitate proper placing and installation.
 - F. Supplementary Parts: Provide as necessary to complete each item of work, even though such supplementary parts are not shown or specified.
 - G. Coordination: Accurately cut, fit, drill and tap work of this Section to accommodate and fit work of other trades. Furnish or obtain, as applicable, templates and drawings to or from applicable trades for proper coordination of this work.
 - H. Exposed Work: In addition to requirements specified herein or shown on drawings, all surfaces exposed to view must be clean, and free from dirt, stains, grease, scratches, distortions, waves, dents, buckles, tool marks, burrs and other defects which mar appearance of finished work. Ornamental metal work exposed to view must be straight and true to line or curve, smooth arrises and angles as sharp as practicable, miters formed in true alignment, profiles accurately intersecting, and with joints carefully matched to produce continuity of line and design. Exposed fastenings, where permitted, must be of the same material, color and finish as the metal to which applied, unless otherwise indicated, and must be of the smallest practicable size.
 - I. Materials used must be of such strength, thickness and alloy that they are capable of meeting all standards and descriptions specified herein and as detailed on drawings.
 - J. Bending: Bend sheet metal to the required shape. Bent items must be free of grain separation, oil canning or other distortion.
 1. Square Bends: Back-cut sheets to attain maximum square bend possible, with maximum radius of 1/16 in.
 2. Knife Edge Bends: Back-cut and back bevel sheets to attain sharpest bend possible, with maximum radius of 1/32 in.



2.3 SHOP FINISHING

A. General

1. Comply with NAAMM "Metal Finishes Manual" for finish designations and application recommendations, except as otherwise indicated.
2. Provide colors or color matches as indicated on selected samples.
3. Protect mechanical finishes on exposed surfaces from damage by application of strippable temporary protective covering prior to shipment.
4. Corrosion Protection: Coat concealed surfaces which will be in contact with concrete, masonry, wood or dissimilar metals, and work to be built into exterior and below grade walls and decks, with a heavy coat of bituminous paint. Do not extend coating onto exposed surfaces.

B. Stainless Steel

1. Remove or blend tool and die marks and stretch lines into finish.
2. Grind and polish surfaces to produce uniform, directionally textured, polished finish indicated, free of cross scratches. Run grain with long dimension of each piece.
3. Bright, Directional Polish: No. 4 finish.
4. When polishing is complete, passivate and rinse surfaces. Remove foreign matter and leave surface chemically dry.

C. Steel, Nongalvanized, Powder-Coat Finish: Prepare, treat, and coat nongalvanized ferrous metal to comply with resin manufacturer's written instructions and as follows

1. Prepare uncoated ferrous-metal surfaces to comply with SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
2. Treat prepared metal with iron-phosphate pretreatment, rinse, and seal surfaces.
3. Apply thermosetting polyester or acrylic urethane powder coating with cured-film thickness not less than 1.5 mils.
4. Color: See Finish Schedule.

D. Brass

1. Hand Rubbed Natural Satin Finish, Lacquered: CDA-M31-M34-06x, fine satin directional textured mechanical finish followed by hand-rubbed directional textured mechanical finish, with clear organic coating specified below.
 - a. Clear, Organic Coating: Lacquer specified for copper alloys; applied by air spray in two coats per manufacturer's written instructions, with interim drying, to a total thickness of 1 mil.
2. Statuary Conversion Coating, Bright Relieved and Lacquered: CDA-M12-C55-06x. Mechanical Finish: matte finish as cast; Chemical Finish: Sulfide (statuary) conversion coating; with clear organic coating specified above.
3. Color: Uniform, matching color of accepted sample.

2.4 PROTECTION

- A. Provide necessary protection to all exposed surfaces of architectural metal work, so as to prevent damage, staining, discoloration, abrasion, etc., to these surfaces from time of shipment from factory to substantial



completion of work of this project. Provide protection by wrappings, strippable coatings, or other means. After installation, remove protective paper or strippable coating and clean exposed surfaces, and then provide additional temporary protection to protect architectural metal work from damage during subsequent construction activities.

2.5 STEEL FRAMING, BRACING, SUPPORTS AND REINFORCEMENTS

- A. Steel framing, plate reinforcing, supplementary steel framing or reinforcing, bracket assemblies, and the like required for the support, framing, reinforcing, bracing, etc., of work of this Section must be of such sizes and shapes as indicated on the drawings, or as required to suit the conditions, and must be provided with all necessary supports and accessory items such as inserts, hangers, braces, struts, clip angles, anchors, bolts, nuts, welds, etc., as required to properly and rigidly fasten, anchor or attach work of this Section in place and to the concrete, masonry and other connecting and adjoining work.

2.6 METAL PANELS

- A. Fabricate of metal as shown on drawings, minimum thickness of 3/16".
- B. Metal panels, fascias, and other sheet or plate items must read as flat and free of bow, oil-canning, or read-through of stiffeners. To this end, exposed metal faces when supported in the building must be of such flatness that the maximum uniform bow in 2 ft. must not exceed 1/32", and the maximum overall variation in plane between high and low point within a panel must not exceed 1/16".

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. General: Install work of this Section square, plumb, straight, true to line or radius, accurately fitted and located, with flush, tight hairline joints (except as otherwise indicated or to allow for thermal movement), with provisions for other trades, with provisions to allow for thermal movement, with provisions to exclude water where exposed to weather, and with attachment devices as required for secure and rigid installation. Ensure that shop fabricated architectural metal items will properly fit the field condition. In cases where the shop fabricated architectural metal items do not fit the field condition, the item must be returned to the shop for correction.
- B. Attachments
 - 1. Unless otherwise indicated, anchor work to be built into concrete or masonry with shop welded on galvanized steel strap anchors; anchor work to be attached to concrete or masonry by bolts into embedded inserts or expansion shields; anchor work attached to structural steel by welds or bolts; anchor work attached to metals other than structural steel by bolts or screws. Power actuated fasteners not permitted unless approved by Commissioner. Provide all supplementary parts necessary to complete each item of work of this Section.
 - 2. All attachment devices must be of type, size and spacing to suit condition and as approved by Commissioner. Provide shims, slotted holes, or other means necessary for leveling, plumbing and other required adjustments. Attachment devices for work exposed to view must be concealed, unless



- indicated otherwise. Where bolts or screws are permitted in work exposed to view, provide oval head and counter sunk, unless otherwise noted, with projecting end cut off flush with nuts or adjacent material, and match adjacent surfaces.
3. Do all necessary drilling, tapping, cutting or other preparations of surrounding construction in the field accurately, neatly and as necessary for the attachment and support of work of this Section, but obtain Commissioner's approval prior to such preparation to work of other trades.
- C. Tolerances: All work of this Section must be plumb, square, level, true to radius and correctly aligned within the following limitations:
1. Offset from true horizontal, vertical and design location must not exceed 1/16" per ten (10) feet of length for any component, not cumulative.
 2. Maximum offset from true alignment between abutting components must not exceed 1/32".
- D. Do not cut or abrade finishes which cannot be completely restored in the field. Return items with such finishes to the shop for required alterations, followed by complete refinishing, or provide new units at Contractor's option.
- E. Install concealed gaskets and joint fillers as the work progresses, so as to make the work soundproof or lightproof as required.
- F. Restore protective coverings which have been damaged during shipment or installation of the work. Remove protective coverings only when there is no possibility of damage from other work yet to be performed at the same location.
- G. Retain protective coverings intact and remove simultaneously from similarly finished items to preclude non-uniform oxidation and discoloration.
- H. Field Welding: Comply with AWS Code for the procedures of manual shielded metal-arc welding, the appearance and quality of welds made, and the methods used in correcting welding work.
- I. Install countertops to support a minimum concentrated live load of 150 lbs. acting downward at mid span at outer edge of counter without causing deformation and damage.

END OF SECTION 05 70 00



SECTION 06 10 00 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Blocking and miscellaneous wood.
 - 2. Plywood backing panels.
 - 3. Rough hardware.
 - 4. Installation only of finish hardware.
 - 5. Installation only of doors and hollow metal frames.

- B. Related Sections

- 1. Section 08 11 13 "Hollow Metal Doors and Frames"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Pressure Treatment: Include certification by treating plant stating chemicals and process used, net amount of salts retained and conformance with applicable standards as specified herein under "Wood Treatment" article.
- C. Fire-Retardant Treatment: Include certification by treating plant that treatment material complies with New York City Building Code and that treatment will not bleed through finished surfaces.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Lumber Standard: Comply with PS 20.
- C. Plywood Standard: Comply with PS 1 and American Plywood Assoc. (APA).
- D. Shop fabricate carpentry work to the extent feasible and where shop fabrication will result in better workmanship than feasible for on-site fabrication.
- E. Grade Marks: Identify lumber and plywood by official grade mark.
 - 1. Lumber: Grade stamp to contain symbol of grading agency certified by Board of Review, American Lumber Standards Committee, mill number or name, grade of lumber, species grouping or combination designation, rules under which graded where applicable, and condition of seasoning at time of manufacture.



a. S-Dry: Maximum nineteen (19) percent moisture content as per ASTM D 2016.

F. Installation of doors, frames and hardware must conform to the minimum standards of "Installation Guides for Doors and Hardware" of the Door and Hardware Institute.

1.5 PRODUCT HANDLING

A. Deliver carpentry materials to the site ready to use with each piece of lumber clearly marked as to grade, type and mill, and place in an area protected from the elements.

B. Deliver rough hardware in sealed kegs and/or other containers that bear labels as to type and kind.

C. Pile lumber for rough usage, when delivered to the site in stacks to ensure drainage and with a minimum clearance of six (6) inches above grade. Cover stacks with tarpaulins or other watertight coverings. Store grounds and similar small sized lumber inside the building as soon as possible after delivery.

D. Do not store seasoned lumber in wet or damp portions of the building.

E. Protect fire retardant treated materials against high humidity and moisture during storage and erection.

F. Remove delivered materials which do not conform to specified grading rules or are otherwise not suitable for installation from the job site and replace with acceptable materials.

G. Hardware must be sorted and stored in space assigned by Contractor and kept at all times under lock and key. The safety and preservation of all items delivered is the responsibility of the Contractor.

1.6 JOB CONDITIONS

A. Installer must examine the substrates and supporting structure and the conditions under which the carpentry work is to be installed and notify the Contractor in writing of conditions detrimental to the work. Do not proceed with the installation until unsatisfactory conditions have been corrected in a manner acceptable to the Installer and the Commissioner.

B. Coordination: Fit carpentry work to other work; scribe and cope as required for accurate fit. Correlate location of furring, nailers, blocking, grounds and similar supports to allow proper attachment of other work.

PART 2 - PRODUCTS

2.1 WOOD MATERIAL

A. General

1. All wood must be sound, flat, straight, well-seasoned, thoroughly dry and free from all defects. Do not use warped or twisted wood.

2. For miscellaneous wood blocking, grounds, furring as required, use Utility Grade Coastal Douglas Fir or Southern Pine, free from knots, shakes, rot or other defects, straight, square edges and straight grain, air seasoned with maximum moisture content of nineteen (19) percent. Wood must be S4S, S-Dry, complying with PS-20.

3. Plywood backing panels: Provide 3/4" thick C-D EXT-APA plywood, fire retardant treated as specified herein.



B. Wood Treatment

1. All interior wood material specified herein must be fire retardant treated to comply with the AWPA standard U1 to achieve a flame spread rating of not more than 25 (UL Class "FR-S") when tested in accordance with UL Test 723 or ASTM E 84. The fire retardant chemicals used to treat the lumber must comply with FR-1 of AWPA Standard P49 and be free of halogens, sulfates and ammonium phosphate.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide Arch Wood Protection Inc.; Dricon or comparable product by one of the following:
 - 1). Koppers
 - 2). Hoover
 - 3). Or approved equal.
 - b. After treatment, kiln dry to a moisture content of fifteen (15) percent; if wood is to be painted or finished, kiln dry to a moisture content of twelve (12) percent.
 - c. Provide UL approved identification on treated materials.
2. Treated wood which is cut or otherwise damaged must be further treated in accordance with the AWPA Standard M-4.

2.2 HARDWARE

- A. Rough Hardware for Treated Woods and Exterior Use: Hot-dipped galvanized or Type 304 stainless steel.
- B. Nails: Common steel wire, untreated for interior work as per ASTM F 1667.
- C. Bolts: Standard mild steel, square head machine bolts with square nuts and malleable iron or steel plate washers or carriage bolts with square nuts and cut washers conforming to the following:
 1. Bolts: ASTM A 307, Grade A.
 2. Nuts: ASTM A 563.
 3. Lag Screws and Bolts: ASME B 18.2.1.
- D. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 6 times the load imposed when installed in unit masonry assemblies and equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.
 1. Material: Carbon-steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.
 2. Material for Treated Woods and Exterior Use: Stainless steel with bolts and nuts complying with ASTM F 593 and ASTM F 594, Alloy Group 1 or 2.
- E. Wood Screws: ASME B 18.6.1.
- F. Concrete and Masonry Anchors: Standard expansion-shield self-drilling type concrete anchors where so shown or noted on the drawings, or where approved by the Commissioner.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION OF FINISH HARDWARE

- A. Hardware must be carefully fitted and securely attached, in accordance with these specifications and the instructions of the various manufacturers.
- B. Install each hardware item in compliance with the manufacturer's instructions and recommendations. Wherever cutting and fitting is required to install hardware onto or into surfaces which are later to be painted or finished in another way, install each item completely and then remove and store in a secure place during the finish application. After completion of the finishes, re-install each item. Do not install surface-mounted items until finishes have been completed on the substrate.
- C. Set units level, plumb and true to line and location. Adjust and reinforce the attachment substrate as necessary for proper installation and operation.
- D. Drill and countersink units which are not factory prepared for anchorage fasteners. Space fasteners and anchors in accordance with industry standards.
- E. Cut and fit threshold and floor covers to profile of door frames, with mitered corners and hair-line joints. Join units with concealed welds or concealed mechanical joints. Cut smooth openings for spindles, bolts and similar items, if any.
- F. All keys used must be construction keys which are to be tagged with fiber discs as approved, clearly labeled with identifying inscriptions and then neatly arranged in a temporary cabinet. All construction keys must be returned to the City of New York.
- G. Adjusting and Cleaning
 - 1. Adjust and check each operating item of hardware and each door, to ensure proper operation and function of every unit. Lubricate moving parts with type lubrication recommended by manufacturer (graphite type if no other recommended). Replace units which cannot be adjusted and lubricated to operate freely and smoothly as intended for the application made.
 - 2. Final Adjustment: Wherever hardware installation is made more than one month prior to substantial completion or occupancy of a space or area, return to the work during the week prior to substantial completion or occupancy, and make a final check and adjustment of all hardware items in such space or area. Clean and re-lubricate operating items as necessary to restore proper function and finish of hardware and doors. Adjust door control devices to compensate for final operation of heating and ventilating equipment.

3.3 INSTALLATION OF DOORS AND FRAMES

- A. Preparation
 - 1. Remove welded-in shipping spreaders installed at factory.



2. Prior to installation and with installation spreaders in place, adjust and securely brace standard steel door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs on a perpendicular line from head to floor.
3. Drill and tap doors and frames to receive non-templated mortised and surface-mounted door hardware.

B. Installation

1. General: Provide doors and frames of sizes, thicknesses, and designs indicated. Install steel doors and frames plumb, rigid, properly aligned, and securely fastened in place.
2. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, leaving surfaces smooth and undamaged.
 - a. Install frames in accordance with ANSI 250.11, Recommended Erection Instructions for Steel Frames, unless more stringent requirements are specified herein.
 - b. At fire-protection-rated openings, install frames according to NFPA 80.
 - c. Where frames are fabricated in sections due to shipping or handling limitations, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces.
 - d. Install frames with removable glazing stops located on secure side of opening.
 - e. Frames set in masonry walls must have door silencers installed in frames before grouting.
 - f. Remove temporary braces necessary for installation only after frames have been properly set and secured.
 - g. Check plumb, squareness, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
3. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor and secure with post-installed expansion anchors.
 - a. Floor anchors may be set with powder-actuated fasteners instead of post-installed expansion anchors if so indicated and approved on Shop Drawings.
4. Metal-Stud Partitions: Solidly pack mineral-fiber insulation behind frames conforming to the requirements of acoustical insulation in Section 09 21 16, "Gypsum Board Assemblies."
5. Ceiling Struts: Extend struts vertically from top of frame at each jamb to supporting construction above, unless frame is anchored to masonry or to other structural support at each jamb. Bend top of struts to provide flush contact for securing to supporting construction above. Provide adjustable wedged or bolted anchorage to frame jamb members.
6. Installation Tolerances: Adjust steel door frames for squareness, alignment, twist, and plumb to the tolerance given in HMMA 841 of ANSI/NAAMM, current edition.



7. Steel Doors: Fit hollow metal doors accurately in frames to the tolerances given in HMMA 841 of ANSI/NAAMM, current edition.
 - a. Fire-Rated Doors: Install doors with clearances according to NFPA 80.
 8. Glazing: Comply with installation requirements in Section 08 81 26 "Interior Glass Glazing" and with standard steel door and frame manufacturer's written instructions.
 - a. Secure stops with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c., and not more than 2 inches o.c. from each corner.
- C. Adjustments: Check and readjust operating finish hardware items just prior to final inspection. Leave work in complete and proper operating condition.

3.4 BLOCKING AND MISCELLANEOUS WOOD

A. General

1. Erect rough carpentry true to line, levels and dimensions required; squared, aligned, plumbed, and securely fastened in place.
2. Shim where required to true up furring, blocking and the like. Use wood or metal shims only.
3. Do all cutting, fitting, drilling and tapping of other work as required to secure work in place and to perform the work included herein. Do all the cutting and fitting of carpentry work, for the work of other trades as required.

B. Blocking and Miscellaneous Wood

1. Furnish and install all wood grounds, furring, blocking, curbs, bucks, nailers, etc., that may be necessary and required in connection with the carpentry and with the work described for any other trades and including required carpentry for electrical fixtures. All blocking and nailers must be continuous wherever required, whether or not so indicated.
2. Provide blocking as required for the proper installation of the finished work and for items in mechanical sections as required. Blocking, edgings, stops, nailing strips, etc., must be continuous, unless distinctly noted otherwise. Provide blocking as required to install all equipment. Provide blocking and nailers where shown or required to fasten interior sheet metal work
3. Fastening for wood grounds, furring and blocking must be of metal and of type and spacing as best suited to conditions. Hardened steel nails, expansion screws, toggle bolts, self-clinching nails, metal plugs, inserts or similar fastenings must be used, of suitable type and size to draw the members into place and securely hold same.

3.5 PLYWOOD BACKING PANELS

- A. Secure to substrate using proper devices for substrates encountered, spaced twelve (12) inches o.c., maximum around the edges, 1-1/2" from corners, and in three (3) rows of three (3) each in the field. Recess fastening devices flush with the plywood surface. Butt adjacent panels with 1/16" space between without lapping.



3.6 ROUGH HARDWARE

- A. Securely fasten rough carpentry together. Nail, spike, lag screw or bolt as required by conditions encountered in the field and the Contract Documents.
- B. Provide rough or framing hardware, such as nails, screws, bolts, anchors, hangers, clips, inserts, miscellaneous fastenings, and similar items of the best quality and of the proper size and kind to adequately secure the work together and in place, in a rigid and substantial manner.
- C. Countersink bolts in nailers and other rough woodwork and include washers and nuts. Cut bolts off flush with surfaces and peen as may be required to receive finished work.
- D. For securing wood nailers to concrete, provide malleable iron threaded inserts with 3/8" diameter bolts of length to allow for countersinking. Locate at end of each nailer and at intervals not exceeding thirty (30) inches o.c.

END OF SECTION 06 10 00



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 06 61 16 - SOLID SURFACING FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes the following solid surfacing fabrications:
 - 1. Radiator covers
 - 2. Door cladding
 - 3. Countertops
 - 4. Shelves

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: Indicate product description, fabrication information, and compliance with specified performance requirements.
- C. Shop Drawings
 - 1. Submit shop drawings of all solid surfacing fabrications specified and indicated on the drawings.
 - 2. Include room plans and elevations at 3/4" equals 1'-0" scale and typical construction details at 3" equals 1'-0" scale. Indicate all materials, thicknesses, jointing and finishes.
 - 3. Show all finish hardware, anchors, fastenings and accessories.
- D. Samples: Submit 12" x 12" samples. Indicate full range of color and pattern variation. Samples must have outside corner/nosing/edging as shown on drawings and fully finished as if it were the final end-product. Approved samples will be retained as a standard for work.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Allowable Tolerances:
 - 1. Variation in Component Size: + 1/8".
 - 2. Location of Openings: + 1/8" from indicated location.



- C. The work of this Section is to be provided by a firm having a minimum of three (3) years' experience on projects of similar size and quality to that specified and shown.

1.5 WARRANTY

- A. Warranty: The manufacturer is to warrant to the City of New York that the manufacturer will, at own option, repair or replace without charge, such product if it fails due to a manufacturing defect during the first 10 years after Substantial Completion. This includes all labor charges needed to repair or replace the product covered hereunder.

PART 2 - PRODUCTS

2.1 SOLID SURFACE MATERIALS

- A. Material: Cast, filled, acrylic; not coated, laminated or of composite construction, meeting ANSI Z124.3, Type Six, and ISFA 2-01 "Classification and Standards for Solid Surfacing Material" as published by the International Surface Fabricators Association (ISFA).
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide E.I. duPont de Nemours and Company; Corian or comparable product by one of the following:
 - a. Formica Corporation
 - b. Avonite, Inc.
 - c. Or approved equal.
 - 2. Color: See Finish Schedule.
 - 3. Thickness: 1/2" thick unless otherwise noted.
- B. Provide counters adhesively joined with no exposed seams, having edge details shown on drawings.

2.2 ACCESSORY PRODUCTS

- A. Adhesive: Product recommended by solid surface material manufacturer.
- B. Sealant: Manufacturer's standard mildew-resistant, FDA/UL recognized silicone sealant in colors matching components.

2.3 FABRICATION

- A. Factory fabricate components exactly to sizes and shapes indicated, in accordance with approved shop drawings. Verify in field all installation conditions prior to fabrication.
- B. Form joints between components using manufacturer's standard joint adhesive; without conspicuous joints. No joints or seams will be permitted other than those shown on the approved shop drawings, unless specifically approved by the Commissioner.
- C. Provide factory cutouts for plumbing fittings and accessories as indicated on the drawings.
- D. Cut and finish component edges with clean, sharp returns. Route radii and contours to template.



- E. Provide all custom sizes, shapes, curves, configurations, reveals, and edgings as called for and shown on the drawings in the dimension and thicknesses noted.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install components plumb and level, scribed to adjacent finishes, in accordance with approved shop drawings and product installation data.
- B. Form field joints using manufacturer's recommended adhesive, with joints inconspicuous in finished work. Keep components and hands clean when making joints.
- C. All surfaces, other than those surfaces that are the mounting/gluing surfaces, must be fully polished to match the finished face of all components. Unfinished surfaces will be rejected.
- D. Final finished surfaces must be fully and evenly polished with manufacturer's recommended finishing products. Unfinished surfaces will be rejected.

END OF SECTION 06 61 16



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 07 84 00 - FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section includes:

1. Penetrations through fire-resistance-rated floor and roof construction including both empty openings and openings containing cables, pipes, ducts, conduits, and other penetrating items.
2. Penetrations through fire-resistance-rated walls and partitions including both empty openings and openings containing cables, pipes, ducts, conduits, and other penetrating items.
3. Penetrations through smoke barriers and construction enclosing compartmentalized areas involving both empty openings and openings containing penetrating items.
4. Sealant joints in fire-resistance-rated construction.
5. Penetrations at each floor level in shafts and/or stairwells.
6. Construction joints, including those between top of fire rated walls and underside of floors above.

B. Related Sections

1. Section 07 92 00 "Joint Sealants"
2. Section 09 21 16 "Gypsum Board Assemblies"

1.3 REFERENCES

- A. ASTM E 814 "Standard Method of Fire Tests of Through-Penetration Firestops."
- B. UL 1479, UBC 7-5 (Both are same as A. above).
- C. ASTM E 119 "Standard Method of Fire Tests of Building Construction and Materials."
- D. UL 263, UBC 7-1 (Both are same as C. above).
- E. UL 2079 "Tests for Fire Resistance of Building Joint Systems."
- F. ASTM E 1399 "Test for Dynamic Movement Conditions."
- G. ASTM E 1966 (Same as E. above).
- H. ASTM G 21 "Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi."
- I. Test Requirements: ASTM E 2307, "Standard Test Method for Determining Fire Resistance of Perimeter Fire Barrier Systems Using Intermediate-Scale, Multi-story Test Apparatus."
- J. Inspection Requirements: ASTM E 2174, "Standard Practice for On-site Inspection of Installed Firestops."



- K. Published Through-Penetration Systems by recognized independent testing agencies.
 - 1. UL Fire Resistance Directory, Volume II of current year.
 - 2. Warnock Hersey Certification Listings, current year.
 - 3. Omega Point Laboratories, current year.
- L. International Firestop Council Guidelines for Evaluating Firestop Systems Engineering Judgments.

1.4 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Submit manufacturer's product literature for each type of firestop material to be installed. Literature must indicate product characteristics, typical uses, performance, limitation criteria, test data and indication that products comply with specified requirements.
- C. Submit shop drawings detailing materials, installation methods, and relationships to adjoining construction for each firestop system, and each kind of construction condition penetrated and kind of penetrating item. Include firestop design designation of qualified testing and inspection agency evidencing compliance with requirements for each condition indicated.
 - 1. Submit documentation, including illustrations, for proposed UL listed (or equal) firestop and smoke seal assembly required for the Project.
- D. Material Safety Data Sheets: Submit MSDS for each firestop product.
- E. Qualification Data: For Installer.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. General: Provide firestopping systems that are produced and installed to resist the spread of fire and the passage of smoke and other gases.
- C. Installation Responsibility: Assign installation of through-penetration firestop systems and fire-resistive joint systems in Project to a single sole source firestop specialty subcontractor.
- D. Firestopping materials must conform to Flame (F) and Temperature (T) ratings as required by New York City Building Code and as tested by nationally accepted test agencies per ASTM E 814 or UL 1479. The F-rating must be a minimum of one (1) hour, but not less than the fire resistance rating of the assembly being penetrated. T-rating, when required by New York City Building Code, must be based on measurement of the temperature rise on the penetrating item(s). The fire test must be conducted with a minimum positive pressure differential of 0.01 inches of water column.
 - 1. Penetrations in Horizontal Assemblies: Provide firestopping with ratings determined in accordance with UL 1479 or ASTM E 814.
 - a. F-Rating: Minimum of 1-hour rating, but not less than the fire-resistance rating of the floor construction being penetrated.
 - b. T-Rating: When penetrant is located outside of a wall cavity, minimum of 1-hour rating, but not less than the fire-resistance rating of the floor construction being penetrated.
 - c. W-Rating: Class 1 rating in accordance with water leakage test per UL 1479.



2. Penetrations in Smoke Barriers: Provide firestopping with ratings determined in accordance with UL 1479 or ASTM E 814.
 - a. L-Rating: Not exceeding 5.0 cfm/sq. ft. of penetration opening at both ambient and elevated temperatures.
- E. Firestopping products must be asbestos free and free of any PCBs.
- F. Do not use any product containing solvents.
- G. Do not use firestop products which after curing, dissolve in water.
- H. Do not use firestop products that contain ceramic fibers.
- I. Installer Qualifications: A firm that has been approved by FM Approval according to FM Approval 4991, "Approval Standard for Firestop Contractors," or been evaluated by UL and found to comply with its "Qualified Firestop Contractor Program Requirements."
- J. Mock-Up: Prepare job site mock-ups of each typical Firestop System proposed for use in the project. Approved mock-ups will be left in place as part of the finished project and will constitute the quality standard for the remaining work.
- K. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
 1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
 2. For floor penetrations with annular spaces exceeding 4 inches or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or alternative means.
 3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.
- L. Mold Resistance: Provide penetration firestopping with mold and mildew resistance rating of less than or equal to 1 as determined by ASTM G 21.
- M. Firestopping Materials are either "cast-in-place" (integral with concrete placement) or "post-installed." Provide cast-in-place firestop devices prior to concrete placement.
- N. Firestop systems do not reestablish the structural integrity of load bearing partitions or assemblies, or support live loads and traffic. Consult the Commissioner prior to penetrating any load bearing assembly.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials in manufacturer's original unopened containers with manufacturer's name, product identification, lot numbers, UL or Warnock Hersey labels, and mixing and installation instructions, as applicable.
- B. Store materials in the original, unopened containers or packages, and under conditions recommended by manufacturer.



- C. All firestop materials must be installed prior to expiration of shelf life.

1.7 PROJECT CONDITIONS

- A. Do not use materials that contain solvents, show sign of damage or are beyond their shelf life.
- B. During installation, provide masking and drop cloths as needed to prevent firestopping products from contaminating any adjacent surfaces.
- C. Conform to ventilation requirements if required by manufacturer's installation instructions or Material Safety Data Sheet.
- D. Weather Conditions: Do not proceed with installation of firestop products when temperatures are in excess or below the manufacturer's recommendations.
- E. Schedule installation of firestop products after completion of penetrating item installation but prior to covering or concealing of openings.

1.8 SEQUENCING AND SCHEDULING

- A. Pre-Installation Conference: Convene a pre-installation conference to establish procedures to maintain optimum working conditions and to coordinate this work with related and adjacent work.
- B. Install all firestop systems after voids and joints are prepared sufficiently to accept the applicable firestop system.
- C. Do not cover firestop systems until they have been properly inspected and accepted by the inspecting agency.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Subject to compliance with requirements, provide products of one of the following manufacturers:
 - 1. Hilti, Inc.
 - 2. Metacaulk.
 - 3. Nelson.
 - 4. Specified Technologies Inc.
 - 5. 3M.
 - 6. Tremco.
 - 7. U.S. Gypsum Co.
 - 8. Or approved equal.

2.2 FIRESTOPPING, GENERAL

- A. Compatibility: Provide firestopping composed of components that are compatible with each other, the substrates forming openings, and the items, if any, penetrating the firestopping under conditions of service and application, as demonstrated by firestopping manufacturer based on testing and field experience.
- B. Accessories: Provide components for each firestopping system that are needed to install fill materials. Use only components specified by the firestopping manufacturer and approved by the qualified testing and



inspecting agency for the designated fire-resistance-rated systems. Accessories include but are not limited to the following items:

1. Permanent forming/damming/backing materials including the following:
 - a. Semirefractory fiber (mineral wool) insulation.
 - b. Sealants used in combination with other forming/damming materials to prevent leakage of fill materials in liquid state.
 - c. Fire-rated form board.
 - d. Joint fillers for joint sealants.
 2. Temporary forming materials.
 3. Substrate primers.
 4. Collars.
 5. Steel sleeves.
- C. Applications: Provide firestopping systems composed of materials specified in this Section that comply with system performance and other requirements.
- D. Smoke seals at top of partitions must be flexible to allow for partition deflection.
- E. Polypropylene Sleeves (PP): For cast-in device options.

2.3 FILL MATERIALS FOR THROUGH-PENETRATION FIRESTOP SYSTEMS

- A. Endothermic, Latex Compound Sealant: Single-component, endothermic, latex formulation.
- B. Intumescent, Latex Sealant: Single-component, Intumescent, latex formulation.
- C. Intumescent Putty: Non-hardening, dielectric, water-resistant putty containing no solvents, inorganic fibers, or silicone compounds.
- D. Intumescent Wrap Strips: Single-component, elastomeric sheet with aluminum or polyethylene foil on one side.
- E. Job-Mixed Vinyl Compound: Prepackaged vinyl-based powder product for mixing with water at Project site to produce a paintable compound, passing ASTM E 136, with flame-spread and smoke-developed ratings of zero per ASTM E 84.
- F. Mortar: Prepackaged dry mix composed of a blend of inorganic binders, fillers, and lightweight aggregate formulated for mixing with water at Project site to form a non-shrinking, homogeneous mortar.
- G. Pillows/Bags: Re-usable, heat-expanding pillows/bags composed of glass-fiber cloth cases filled with a combination of mineral-fiber, water-insoluble expansion agents and fire-retardant additives.
- H. Silicone Foam: Two-component, silicone-based liquid elastomer that, when mixed, expands and cures in place to produce a flexible, non-shrinking foam.
- I. Silicone Sealant: Moisture-curing, single-component, silicone-based, neutral-curing elastomeric sealant of grade indicated below:



1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces and non-sag formulation for openings in vertical and other surfaces requiring a non-slumping/gunnable sealant, unless firestop system limits use to non-sag grade for both opening conditions.
- J. Cast-in-Place Firestop Devices: Factory-assembled devices for use in cast-in-place concrete floors and consisting of an outer metallic or polypropylene sleeve lined with an intumescent strip, an extended rectangular flange attached to one end of the sleeve for fastening to concrete formwork, and a neoprene gasket.
- K. Fire Rated Cable Management Devices: Factory-assembled round metallic sleeve device for use with cable penetrations, containing an integrated smoke seal fabric membrane that can be opened and closed for re-penetration.
- L. Drop-In Firestop Devices: Factory-assembled devices for use with combustible or noncombustible penetrants in cored holes within concrete floors. Device includes galvanized steel sleeve lined with an intumescent strip, an extended rectangular flange attached to one end of the sleeve for fastening to concrete floor, and neoprene gasket.
- M. Firestop Devices: Factory-assembled collars formed from galvanized steel and lined with intumescent material sized to fit specific diameter of penetrant.
- N. Intumescent Composite Sheets: Rigid panels consisting of aluminum-foil-faced elastomeric sheet bonded to galvanized-steel sheet.
- O. Blocks/Plugs: Intumescent flexible block/plug suitable for reuse in re-penetration of openings. Blocks must allow up to 12" of unreinforced annular space.

2.4 FIRE-RESISTIVE ELASTOMERIC JOINT SEALANTS

- A. Elastomeric Sealant Standard: Provide manufacturer's standard chemically curing, elastomeric sealant of base polymer indicated that complies with ASTM C 920 requirements, including those referenced for Type, Grade, Class, and Uses, and requirements specified in this Section applicable to fire-resistive joint sealants.
 1. Sealant Colors: Color of exposed joint sealants as selected by the Commissioner.
- B. Single-Component, Neutral-Curing Silicone Sealant: Type S; Grade NS; Class 25; exposure-related Use NT, and joint-substrate-related Uses M, G, A, and (as applicable to joint substrates indicated) O.
 1. Additional Movement Capability: Provide sealant with the capability to withstand 33 percent movement in both extension and compression for a total of 66 percent movement.
- C. Multi-Component, Non-Sag, Urethane Sealant: Type M; Grade NS; Class 25; exposure-related Use NT, and joint-substrate-related Uses M, A, and (as applicable to joint substrates indicated) O.
 1. Additional Movement Capability: Provide sealant with the capability to withstand 40 percent movement in extension and 25 percent in compression for a total of 65 percent movement in joint width existing at time of installation, when tested for adhesion and cohesion under maximum cyclic movement per ASTM C 719, and remain in compliance with other requirements of ASTM C 920 for uses indicated.
- D. Single-Component, Non-Sag, Urethane Sealant: Type S; Grade NS; Class 25; and Uses NT, M, A, and (as applicable to joint substrates indicated) O.



2.5 MINERAL FIBER/CERAMIC WOOL NON-COMBUSTIBLE INSULATION (FIRE SAFING)

- A. Provide min. 4 pcf safing insulation; Thermafiber Safing Mineral Wool Insulation by Thermafiber, Inc. (an Owens Corning company), Roxul Safe Fire Safing Insulation by Rockwool, Mineral Wool Safing by Johns Manville or approved equal to suit conditions and to comply with fire resistance and firestop manufacturer's requirements.
- B. Material must be classified non-combustible when tested per ASTM E 136.

2.6 MIXING

- A. For those products requiring mixing prior to application, comply with firestopping manufacturer's directions for accurate proportioning of materials, water (if required), type of mixing equipment, selection of mixer speeds, mixing containers, mixing time, and other procedures needed to produce firestopping products of uniform quality with optimum performance characteristics for application indicated.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PREPARATION

- A. Surface Cleaning: Clean out openings and joints immediately prior to installing firestopping to comply with recommendations of firestopping manufacturer and the following requirements:
 - 1. Remove all foreign materials from surfaces of opening and joint substrates and from penetrating items that could interfere with adhesion of firestopping.
 - 2. Clean opening and joint substrates and penetrating items to produce clean, sound surfaces capable of developing optimum bond with firestopping. Remove loose particles remaining from cleaning operation.
 - 3. Remove laitance and form release agents from concrete.
- B. Priming: Prime substrates where recommended by firestopping manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.
- C. Masking Tape: Use masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 CONDITIONS REQUIRING FIRESTOPPING

- A. Interior Walls and Partitions
 - 1. Install firestopping at construction joints between top of fire rated walls and underside of floors above.
 - 2. Firestop system installed must have been tested by either UL or Omega Point, including exposure to hose stream test and including for use with steel fluted deck floor assemblies.
 - 3. Firestop system used must allow for deflection of floor above.



B. Penetrations

1. Penetrations include conduit, cable, wire, pipe, duct, or other elements which pass through one or both outer surfaces of a fire rated floor, wall, or partition.
2. Except for floors on grade, where a penetration occurs through a structural floor or roof and a space would otherwise remain open between the surfaces of the penetration and the edge of the adjoining structural floor or roof, provide firestopping to fill such spaces in accordance with ASTM E 814.
3. These requirements for penetrations apply whether or not sleeves have been provided, and whether or not penetrations are to be equipped with escutcheons or other trim. If penetrations are sleeved, firestop annular space, if any, between sleeve and wall of opening.

- C. Provide firestopping to fill miscellaneous voids and openings in fire rated construction in a manner essentially the same as specified herein before.

3.4 INSTALLING THROUGH PENETRATION FIRESTOPS

- A. General: Comply with the through penetrations firestop manufacturer's installation instructions and drawings pertaining to products and applications indicated.
- B. Install forming/damming materials and other accessories of types required to support fill materials during their application and in the position needed to produce the cross sectional shapes and depths required to achieve fire ratings of designated through-penetration firestop systems. After installing fill materials, remove combustible forming materials and other accessories not indicated as permanent components of firestop systems.
- C. Install fill materials for through penetration firestop systems by proven techniques to produce the following results:
1. Completely fill voids and cavities formed by openings, forming materials, accessories, and penetrating items.
 2. Apply materials so they contact and adhere to substrates formed by openings and penetrating items.
 3. For fill materials that will remain exposed after completing work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.5 INSTALLING FIRE RESISTIVE JOINT SEALANTS

- A. General: Comply with ASTM C 1193, and with the sealant manufacturer's installation instructions and drawings pertaining to products and applications indicated.
- B. Install joint fillers to provide support of sealants during application and at position required to produce the cross sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability and develop fire resistance rating required.
- C. Install sealants by proven techniques that result in sealants directly contacting and fully wetting joint substrates, completely filling recesses provided for each joint configuration, and providing uniform, cross sectional shapes and depths relative to joint width that optimum sealant movement capability. Install sealants at the same time joint fillers are installed.
- D. Tool no sag sealants immediately after sealant application and prior to the time skinning or curing begins. Form smooth, uniform beads of configuration indicated or required to produce fire resistance rating, as well as to eliminate air pockets, and to ensure contact and adhesion of sealants with sides of joint. Remove



excess sealant from surfaces adjacent to joint. Do not use tooling agents that discolor sealants or adjacent surfaces or are not approved by sealant manufacturer.

3.6 INSTALLING FIRESAFING INSULATION

- A. Install fire safing insulation utilizing welded or screw applied galvanized steel impaling pins and retaining clips; space clips or pins 24" o.c. maximum.
- B. Completely fill voids in areas where safing insulation is required. At spandrel conditions/floor edges, depth of insulation top to bottom must be at least four (4) inches.
- C. Cover top of all safing insulation with firestop sealant or spray.

3.7 FIELD QUALITY CONTROL

- A. Special inspecting agency retained by the City of New York will examine completed firestopping to determine, in general, if it is being installed in compliance with requirements.
- B. Inspecting agency will report observations promptly and in writing to Contractor and Commissioner.
- C. Do not proceed to enclose firestopping with other construction until reports of examinations are issued.
- D. Where deficiencies are found, Contractor must restore or replace firestopping so that it complies with requirements.

END OF SECTION 07 84 00



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 07 92 00 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Interior wall joints not specified to be sealed in other Sections of work, including caulking to fill between architectural woodwork and any wall, floor and/or ceiling imperfections.
2. Control and expansion joints in walls.
3. Joints at wall penetrations.
4. Joints between items of equipment and other construction.
5. All other joints required to be sealed to provide a positive barrier against penetration of air. All sealants must be chemically and adhesion compatible with adjacent materials, especially weather resistive barriers (of any type).

- B. Related sections

1. Section 07 84 00 "Firestopping"
2. Section 09 21 16 "Gypsum Board Assemblies"
3. Section 09 30 00 "Tiling"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

- B. Shop Drawings: Submit shop drawings showing all joint conditions, indicating relation of adjacent materials, all sealant materials (sealant, bond breakers, backing, primers, etc.), and method of installation.

1. Submit joint sizing calculations certifying that movement capability of sealant is not being exceeded.

- C. Samples: Submit the following:

1. Color samples of sealants, submit physical samples (not color chart).
2. Sealant bond breaker and joint backing.

- D. Product Data: Submit manufacturer's technical information and installation instructions for:

1. Sealant materials, indicating that material meets standards specified herein.
2. Backing rods.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".



- B. Qualification of Installers: Use only personnel who are experienced in the techniques of sealant work, and who are completely familiar with the published recommendations of the sealant manufacturer.

1.5 ENVIRONMENTAL CONDITIONS

- A. Temperature: Install all work of this Section when air temperature is above forty (40) degrees F. and below eighty (80) degrees F., unless manufacturer submits written instructions permitting sealant use outside of this temperature range.
- B. Moisture: Do not apply work of this Section on surfaces which are wet, damp, or have frost.

1.6 DELIVERY, STORAGE AND HANDLING

A. Storage

1. Store sealant materials and equipment under conditions recommended by their manufacturer.
2. Do not use materials stored for a period of time exceeding the maximum recommended shelf life of the material.
3. Store material in unopened containers with manufacturers' name, batch number and date when shelf life expires.

1.7 WARRANTY

- A. Provide a written, notarized warranty from the manufacturer stating that the applied sealants will show no material failure for a period of ten (10) years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SEALANT MATERIALS

- A. Interior Sealant: Provide a one (1) part acrylic based sealant conforming to ASTM C 834.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Pecora; AC-20+ Silicone or comparable product by one of the following:
 - a. Tremco
 - b. Sherwin Williams
 - c. Or approved equal.

- B. Pick-Proof Sealant (for use inside holding pens): (2) component, solvent-free, moisture insensitive, low modulus, non-sagging epoxy resin gel w/ minimum shore D hardness of 70, Type III, Grade 3, Class B & C.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Sika Corp.; Sikadur-23, Lo Mod Gel or comparable product by one of the following:
 - a. Polygem, Inc.
 - b. Tremco
 - c. Or approved equal.



- C. Colors: Colors selected from manufacturer's standard selection.
 - 1. Submit physical samples for color selection.

2.2 MISCELLANEOUS MATERIALS

- A. Back-Up Materials: Provide back-up materials and preformed joint fillers, non-staining, non-absorbent, compatible with sealant and primer, and of a resilient nature, twenty-five (25) percent wider than joint width. Do not use materials impregnated with oil, bitumen or similar materials. Provide back-up materials only as recommended by sealant manufacturer in writing.
- B. Provide bond breakers, where required, of polyethylene tape as recommended by manufacturer of sealant.
- C. Provide primers recommended by the sealant manufacturer for each material to receive sealant. Note that each exterior joint must be primed prior to sealing.
- D. Provide solvent, cleaning agents and other accessory materials as recommended by the sealant manufacturer.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Sealant Installation Standard: Comply with instructions and recommendations of the manufacturer and in accordance with ASTM C 1193 for use of joint sealants as applicable to materials, applications and conditions required by this Project where more stringent installation requirements are specified herein, such requirements apply.
- B. Supervision: Submit written certification from the sealant manufacturer that the applicators have been instructed in the proper application of their materials. Use only skilled and experienced workers for installation of sealant.
- C. Apply sealant under pressure with a hand or power actuated gun or other appropriate means. Utilize gun with nozzle of proper size and provide sufficient pressure to completely fill joints as detailed. Neatly point or tool joint to provide the contour as indicated on the drawings.
- D. Preparation and Application
 - 1. Thoroughly clean all joints, removing all foreign matter such as dust, oil, grease, water, surface dirt and frost. Sealant must be applied to the base surface. Previously applied film must be entirely removed.
 - 2. Clean stone, masonry and concrete surfaces to receive sealant by grinding, water blast cleaning, mechanical abrading, or combination of these methods as required to provide a clean, sound base surface for sealant adhesion.
 - a. Do not use any acid or other material which might stain surfaces.
 - b. Remove laitance by grinding or mechanical abrading.



- c. Remove loose particles present or resulting from grinding, abrading, or blast cleaning by blowing out joints with compressed air, oil and water free, or vacuuming joints prior to application of primer or sealant.
3. Clean non-porous surfaces such as metal and glass chemically. Remove protective coatings on metallic surfaces by solvent that leaves no residue and is compatible with sealant. Use solvent and wipe dry with clean, dry lint free paper towels. Do not allow solvent to air dry without wiping. Clean joint areas protected with masking tape or strippable films as above after removal of tape film.
4. Do not seal joints until they are in compliance with drawings, or meet with the control section standard.
5. Joint Size and Sealant Size: Minimum 1/4" wide. In joint 1/4" to 3/8" wide, provide sealant 1/4" deep. In joints wider than 3/8" and up to 1" wide, provide sealant depth one half the joint width. For joints wider than 1", provide sealant depth as recommended by the sealant manufacturer. Depth of joint is defined as distance from outside face of joint to closest point of the filler.
6. Primer: Thoroughly clean joints and apply primer to all surfaces that will receive sealant. Apply primer on clean, dry surfaces, and prior to installation of joint backing. Completely wet both inner faces of the joint with primer. Mask adjacent surfaces of joint with non-staining masking tape prior to priming. Apply primer with clean brush and only when temperature is above 45 deg. F.
7. Joint Backing: In joints where depth of joint exceeds required depth of sealant, install joint backing (after primer is dry) in joints to provide backing and proper joint shape for sealant. Proper shape for sealant is a very slight "hourglass" shape, with back and front face having slight concave curvature. Use special blunt T-shaped tool or roller to install joint backing to the proper and uniform depth required for the sealant. Install joint backing with approximately twenty-five (25) percent compressions. Do not stretch, twist, braid, puncture, or tear joint backing. Butt joint backing at intersections.
8. Bond Breaker: Install bond breaker smoothly over joint backing so that sealant adheres only to the sides of the joint and not backing.
9. Sealant Application: Apply sealant in accordance with the manufacturer's application manual and manufacturer's instructions, using hand guns or pressure equipment, on clean, dry, properly prepared substrates, completely filling joints to eliminate air pockets and voids. Mask adjacent surfaces of joint with non-staining masking tape. Force sealant into joint in front of the tip of the "caulking gun" (not pulled after it) and force sealant against sides to make uniform contact with sides of joint and to prevent entrapped air or pulling of sealant off of sides. Fill sealant space solid with sealant.
10. Tooling: Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 4A in ASTM C 1193. Finished joints must be straight, uniform, smooth and neatly finished. Remove masking tape immediately after tooling of sealant and before sealant face starts to "skin" over. Neatly remove any excess sealant from adjacent surfaces of joint, leaving the work in a neat, clean condition.

END OF SECTION 07 92 00



SECTION 08 11 13 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Interior hollow metal doors and frames for unrated door openings.
2. Preparation of metal doors and frames to receive finish hardware, including reinforcements, drilling and tapping, as necessary.
3. Furnishing anchors for building into masonry and drywall.
4. Factory prime painting of work of this Section.
5. Trimless door frames.

- B. Related Sections

1. Section 06 10 00 "Rough Carpentry", for installation of doors and frames.
2. Section 08 34 63 "Security Steel Doors and Frames"
3. Section 08 71 00 "Door Hardware"
4. Section 09 21 16 "Gypsum Drywall"
5. Section 09 90 00 "Painting and Coating"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: Include construction details, material descriptions, core descriptions, label compliance, compliance with standards referenced herein, sound and fire-resistance ratings, and finishes for each type of door and frame specified.
- C. Shop Drawings: Show fabrication and installation of doors and frames. Include details of each frame type, elevations of door design types, conditions at openings, details of construction, reinforcement for surface applied hardware, dimensions of profiles and hardware preparation, location and installation requirements of door and frame hardware and reinforcements, and details of joints and connections. Show anchorage and accessories.
- D. Door Schedule: Submit schedule of doors and frames using same reference numbers for details and openings as those on Drawings.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".



- B. **Manufacturer Qualifications:** A firm experienced in manufacturing custom steel doors and frames similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- C. **Testing Agency Qualifications:** An independent agency qualified according to ASTM E 329, Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection, for testing indicated.
- D. **Source Limitations:** Obtain custom steel doors and frames through one source from a single manufacturer.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver doors and frames palleted, wrapped, or crated to provide protection during transit and Project site storage. Do not use nonvented plastic.
- B. Store doors and frames under cover at building site. Conform to the requirements of ANSI A 250-11, Recommended Erection Instructions for Steel Frames, for site storage unless more stringent requirements are noted herein. Place units on minimum 4-inch high wood blocking. Avoid using nonvented plastic or canvas shelters that could create a humidity chamber. If wrappers on doors become wet, remove cartons immediately. Provide minimum 1/4-inch spaces between stacked doors to permit air circulation.

PART 2 - PRODUCTS

2.1 FABRICATION - GENERAL

- A. Fabricate hollow metal units to be rigid, neat in appearance and free from defects, warp or buckle. Accurately form metal to required sizes and profiles. Weld exposed joints continuously, grind, dress, and make smooth, flush and invisible. Metallic filler to conceal manufacturing defects is not acceptable.
- B. Unless otherwise indicated, provide countersunk flat Phillips or Jackson heads for exposed screws and bolts.
- C. Prepare hollow metal units to receive finish hardware, including cutouts, reinforcing, drilling and tapping in accordance with Finish Hardware Schedule and templates provided by hardware suppliers. Comply with applicable requirements of ANSI A115 "Specifications for Door and Frame Preparation for Hardware."
- D. Locate finish hardware as shown on final shop drawings in accordance with locations noted herein.

2.2 MANUFACTURERS

- A. **Manufacturers:** Subject to compliance with requirements, provide products by one of the following:
 - 1. Steelcraft
 - 2. Curries
 - 3. Ceco Door Products
 - 4. Or approved equal.



2.3 FRAMES

A. Materials

1. Frames for interior openings: Either commercial grade cold-rolled steel conforming to ASTM A 1008, Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy With Improved Formability, Solution Hardened, And Bake Hardenable, Type B or commercial grade hot-rolled steel conforming to ASTM A 1011, Commercial Steel, Type B. Metal thickness: Not less than sixteen (16) ga. for frames in openings 4'-0" or less in width; not less than fourteen (14) ga. for frames in openings over 4'-0" in width.

B. Design and Construction

1. All frames must be welded units with integral trim, of the sizes and shapes shown on approved shop drawings. Knock-down frames are not permitted.
2. All finished work must be strong and rigid, neat in appearance, square, true and free of defects, warp or buckle. Molded members must be clean cut, straight and of uniform profile throughout their lengths.
3. Jamb depths, trim, profile and backbends: As shown on drawings.
 - a. Frames at drywall partitions: Formed with double return backbends to prevent cutting into drywall surface.
4. Provide welded frames with corners mitered and reinforced and faces of welded frames continuously back welded full depth and width of frame conforming to NAAMM Standard HMMA-820; provide hairline face joints.
5. Minimum depth of stops: 5/8"
6. Frames for multiple or special openings must have mullion and/or rail members which are closed tubular shapes having no visible seams or joints. All joints between faces of abutting members must be securely welded and finished smooth.
 - a. Mullions must have 16 ga. internal steel stiffeners welded not less than 4" o.c.
7. Hardware Reinforcements
 - a. Frames must be mortised, reinforced, drilled and tapped at the factory for fully-templated mortised hardware only, in accordance with approved hardware schedule and templates provided by the hardware supplier. Where surface-mounted hardware is to be applied, frames must have reinforcing plates.
 - b. Minimum thickness of hardware reinforcing plates:
 - 1). Hinge and pivot reinforcements - seven (7) ga., 1-1/4" x 10" minimum size.
 - 2). Strike reinforcements - twelve (12) gauge
 - 3). Flush bolt reinforcements - twelve (12) gauge
 - 4). Closer reinforcements - twelve (12) gauge
 - 5). Reinforcements for surface mounted hardware - twelve (12) gauge.
8. Floor Anchors
 - a. Provide adjustable floor anchors, providing not less than two (2) inch height adjustment.
 - b. Minimum thickness of floor anchors: Fourteen (14) gauge.



9. Jamb Anchors
 - a. Provide frames for installation in masonry walls with adjustable jamb anchors of the wire type. Anchors: Minimum 0.156" diameter steel wire. The number of anchors provided on each:
 - 1). Frames up to 7'-6" height - three (3) anchors.
 - 2). Frames 7'-6" to 8'-0" height - four (4) anchors.
 - 3). Frames over 8'-0" height - one (1) anchor for each 2'-0" or fraction thereof in height.
 - b. Provide frames for installation in stud partitions with steel anchors of suitable design, not less than eighteen (18) gauge thickness, securely welded inside each jamb as follows:
 - 1). Frames up to 7'-6" height - four (4) anchors.
 - 2). Frames 7'-6" to 8'-0" height - five (5) anchors.
 - 3). Frames over 8'-0" height - five (5) anchors plus one additional for each 2'-0" or fraction thereof over 8'-0".
 10. Anchors in masonry walls: Hot dip galvanized per ASTM A 153.
 11. Provide frames for installation in masonry wall openings more than 4'-0" in width with an angle or channel stiffener factory welded into the head. Such stiffeners must be not less than twelve (12) gauge steel and not longer than the opening width, and must not be used as lintels or load bearing members.
 12. Provide dust cover boxes (or mortar guards) of not thinner than twenty-six (26) gauge steel at all hardware mortises on frames to be set in masonry or plaster partitions.
 13. Ceiling Struts: Minimum 3/8" thick x 2" wide steel.
 14. Provide all frames with a steel spreader temporarily attached to the feet of both jambs to serve as a brace during shipping and handling.
 15. Except on weatherstripped frames, drill stops to receive three (3) silencers on strike jambs of single door frames and two (2) silencers on heads of double-door frames.
- C. Finish: After fabrication, remove all tool marks and surface imperfections, and dress smooth exposed faces of all welded joints. Then chemically treat frames to ensure maximum paint adhesion and coat on all surfaces with one coat of rust-inhibitive baked-on alkyd primer standard with the manufacturer which is fully cured before shipment to a dry film thickness of 2.0 mils.
- D. Trimless Door Frames: Provide flush steel single rabbet door frames.
1. Material: 18 gauge galvanized steel, one-piece with perforated flanges.
 2. Depth: Suitable for 1-3/4" thick doors, and applicable partition thickness.
 3. Fire Rating: Up to 90 minutes; Intertek listed.
 4. Hardware: See Hardware Schedule.
 5. Accessories: Provide flush finish accessories as required for complete installation.

2.4 HOLLOW METAL DOORS

- A. Materials: Commercial quality, level, cold rolled steel conforming to ASTM A 1008/A, Commercial Steel, Type B and free of scale, pitting or other surface defects.
 1. Face sheets for interior doors: Minimum eighteen (18) gauge.



B. Design and Construction

1. Provide doors of the types and sizes shown on the approved shop drawings, of fully welded seamless construction with no visible seams or joints on their faces or vertical edges. Minimum door thickness: 1-3/4".
2. All doors must be strong, rigid and neat in appearance, free from warpage or buckles. Corner bends must be true and straight and of minimum radius for the gauge of metal used.
3. Face sheets must be stiffened by continuous vertical formed steel sections spanning the full thickness of the interior space between door faces. These stiffeners must be not less than twenty two (22) gauge spaced not more than six (6) inches apart and securely attached to face sheets by spot welds not more than five (5) inches o.c. Spaces between stiffeners must be sound deadened and thermal insulated the full height of the door with an inorganic non-combustible batt type material.
4. Door faces must be joined at their vertical edges by a continuous weld extending the full height of the door. All such welds must be ground, filled and dressed smooth to make them invisible and provide a smooth flush surface.
5. Top and bottom edges of all doors must be closed with a continuous recessed steel channel not less than fourteen (14) gauge, extending the full width of the door and spot welded to both faces.
6. Edge profiles must be provided on both vertical edges of doors as follows:
 - a. Single-Acting Swing Doors: Beveled 1/8" in two (2) inches.
 - b. Double-Acting Swing Doors: Rounded on 2-1/8" radius.
 - c. No square edge doors permitted.

7. Hardware Reinforcements

- a. Doors must be mortised, reinforced, drilled and tapped at the factory for fully templated hardware only in accord with the approved hardware schedule and templates provided by the hardware supplier. Where surface-mounted hardware (or hardware, the interrelation of which is to be adjusted upon installation - such as top and bottom pivots, floor closers, etc.) is to be applied, doors must have reinforcing plates.
- b. Minimum gauges for hardware reinforcing plates:
 - 1). Hinge and pivot reinforcement - seven (7) gauge.
 - 2). Reinforcement for lock face, flush bolts, concealed holders, concealed or surface mounted closers - twelve (12) gauge.
 - 3). Reinforcements for all other surface mounted hardware - sixteen (16) gauge.

C. Finish: After fabrication, remove all tool marks and surface imperfections, and dress, fill and sand as required to make all faces and vertical edges smooth, level and free of all irregularities. Then chemically treat doors to ensure maximum paint adhesion and coat on all exposed surfaces with manufacturer's standard rust-inhibitive alkyd primer as specified for frames which is fully cured before shipment.

D. Flatness: Maintain a flatness tolerance of 1/16" maximum, in any direction, including in a diagonal direction.

2.5 HARDWARE LOCATIONS

A. The location of hardware on doors and frames must be as noted in "Recommended Locations for Architectural Hardware for Standard Steel Doors and Frames" of the Door Hardware Institute unless otherwise required by New York City Building Code.



2.6 CLEARANCES

A. Fabricate doors and frames to meet edge clearances as follows:

1. Jambs and Head: 1/8" plus or minus 1/16".
2. Meeting Edges, Pairs of Doors: 1/8" plus or minus 1/16".
3. Bottom: 3/8" at threshold; 3/4" if no threshold.

2.7 MANUFACTURING TOLERANCES

A. Maintain manufacturing tolerances within the limits given in HMMA 841 of ANSI/NAAMM, current edition.

2.8 PREPARATION FOR FINISH HARDWARE

A. Prepare door and frames to receive hardware:

1. Hardware supplier must furnish hollow metal manufacturer approved hardware schedule, hardware templates, and samples of physical hardware where necessary to ensure correct fitting and installation.
2. Preparation includes sinkages and cut-outs for mortise and concealed hardware.

B. Provide reinforcements for both concealed and surface applied hardware:

1. Drill and tap mortise reinforcements at factory, using templates.
2. Install reinforcements with concealed connections designed to develop full strength of reinforcements.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

A. Refer to Section 06 10 00, Rough Carpentry, for installation procedures for all work of this Section.

END OF SECTION 08 11 13



SECTION 08 31 13 - ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section includes:

1. Recessed panel access doors at tiled walls.
2. Recessed panel access doors at drywall walls.
3. Provide access doors and frames for access from occupied spaces to the following, where indicated or required.
 - a. All shutoff or balancing valves.
 - b. Fire dampers, as required.
 - c. Points of duct access.
 - d. Pull boxes.
 - e. Controls of mechanical and electrical items.
 - f. Masonry shafts for pipes and conduits, as required.
 - g. Pipe spaces, if required.
 - h. Inlets of fans.
 - i. Fusible link and splitter damper at filter bank.
 - j. Automatic damper and motor.
 - k. Equipment not otherwise accessible.

B. Related Sections

1. Section 09 21 16 "Gypsum Drywall"
2. Section 09 30 00 "Tiling "

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: For each type of product.
1. Include construction details, fire ratings, material descriptions, dimensions of individual components and profiles, and finishes.
- C. Samples: For each type of access door and frame and for each finish specified, complete assembly minimum 6 by 6 inches in size.
- D. Product Schedule: For access doors and frames. Use same designations indicated on Drawings.



- E. Record Documents: For fire-rated doors, list of applicable room name and number in which access door is located.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. For actual installation of the work of this Section, use only personnel who are thoroughly familiar with the manufacturer's recommended methods of installation and experienced in the skills required.
- C. Fire-Resistance Ratings: Wherever a fire-resistance classification is shown, or for construction where access doors are installed, provide required access door assembly with panel door, frame, hinge and latch from manufacturers listed in Underwriters' Laboratories, Inc. "Classified Building Materials Index" for the rating shown.
 - 1. Provide UL label on each access panel.
 - 2. Provide flush, key operated cylinder lock.
- D. Size Variations: Obtain Commissioner's acceptance of manufacturer's standard size units which may vary slightly from sizes shown or scheduled.

PART 2 - PRODUCTS

2.1 ACCESS DOORS AND FRAMES

- A. E28 - Tiled Wall Access Panel: Fire-rated uninsulated access door recessed 1/2 inch for tile walls.
 - 1. Size: 24 x 24 inches
 - 2. Material: Steel.
 - 3. Door: Minimum 16 gage with reinforced edges, door panel recessed 1/2 inch and lined with self-furring lath.
 - 4. Mounting Frame: 16 gage steel.
 - 5. Hinge: Continuous exposed piano hinge.
 - 6. Latch: Flush, key operated mortise cylinder lock.
 - 7. Finish: Factory primed with manufacturer's standard white baked enamel finish.
 - 8. Product: Subject to compliance with requirements, provide one of the following:
 - a. Babcock-Davis; Tile Ready Fire-Rated Access Door
 - b. Best Access Doors; BA-FB-5060-TD
 - c. Acudor; FB-5060-TD
 - d. Or approved equal.
- B. E29 - Non-Tiled Wall and Ceiling Access Panel: Access door recessed 5/8 inch for drywall.
 - 1. Size: 24 x 24 inches
 - 2. Material: Steel or aluminum.
 - 3. Door: Recessed 5/8 inch to accommodate drywall.
 - 4. Trim: 1 inch wide perforated flange of 24 gage galvanized steel.
 - 5. Hinge: Manufacturer's standard.
 - 6. Latches: Flush stainless steel cam latch.



7. Finish: Factory primed with manufacturer's standard white baked enamel finish.
8. Product: Subject to compliance with requirements, provide one of the following:
 - a. The Williams Bros. Corporation of America; WB RDW 410
 - b. Best Access Doors; BA-IVHDF
 - c. FF Systems; F2ADF
 - d. Or approved equal.

2.2 FABRICATION

- A. General: Provide access door and frame assemblies manufactured as integral units ready for installation.
- B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.
- C. Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish mounting holes, attachment devices and fasteners of type required to secure access doors to types of supports indicated.
- D. Recessed Access Doors: Form face of panel to provide recess for application of applied finish. Reinforce panel as required to prevent buckling. Provide access sleeves for each latch operator and install in holes cut through finish.
- E. Aluminum: After fabrication, apply manufacturer's standard protective coating on aluminum that will come in contact with concrete.

2.3 FINISHES

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- D. Painted Finishes: Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.
 1. Factory Primed: Apply manufacturer's standard, lead- and chromate-free, universal primer immediately after surface preparation and pretreatment.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.



3.2 COORDINATION

- A. Set frames accurately in position and securely attach to supports with face panels plumb or level in relation to adjacent finish surfaces.
- B. Adjust hardware and panels after installation for proper operation.

END OF SECTION 08 31 13



SECTION 08 34 53 - SECURITY DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Security hollow metal doors and frames.
 - 2. Custom holding pen doors.
- B. Related Sections
 - 1. Section 09 21 16 "Gypsum Board Assemblies"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 MATERIALS INFORMATION AND LEVEL OF PERFORMANCE

- A. Security Hollow Metal Frames - General: Provide combination type frames with integral trim fabricated of cold rolled, or hot rolled, pickled and oiled steel sheets with clean, smooth surfaces. Provide joints of full welded unit type construction with contact edges closed tight and welds on exposed surfaces dressed smooth and flush. Fabricate molded members straight and true, with corner joints well-formed and in true alignment and fastenings concealed where practicable. Finish work must be strong, rigid, neat in appearance and free of defects.
 - 1. Construct frames of commercial quality, cold rolled steel conforming to ASTM A 366 or hot rolled, pickled and oiled steel conforming to ASTM A 569. The steel must be free of scale, pitting, coil breaks or other surface defects. Frames for interior openings to be steel, 12 gauge minimum thickness. Where scheduled, interior frames must have a zinc coating conforming to ASTM A 653/A 653M (A60). Provide frames with fully mitered joints, including stops, continuously welded inside the miter across the full depth and width of frame.
 - 2. Frames for Multiple or Special Openings: Provide mullion and/or rail members which are closed tubular shapes, having no visible seams or joints on the faces. All joints between faces of abutting members must be continuously welded and finished smooth, unless noted otherwise. Mullions, jambs, head and sill must be secured to walls and fully grouted.



3. Fabrication: Frames must be shipped as a complete unit where possible. When shipping limitations so dictate, frames for large openings must be fabricated in smaller sections and designed for splicing in the field; factory prepared splices must be field assembled.
 4. Reinforcing: Frames must be mortised, reinforced, drilled and tapped at the factory for templated mortised hardware in accordance with the approved hardware schedules and template provided by the contractor for that Section. Where surface mounted hardware is to be applied, frames must have reinforcing plates completely drilled and tapped for installation in the field.
 5. Hinge Reinforcing: For mortise butts, provide a 7 gauge minimum x 1-1/2" x full height reinforcing plate, offset at each hinge location and factory drilled and tapped.
 6. Lock or Keeper Provisions: Lock or keeper preparation must be in accordance with the recommendation of the hardware manufacturers. Reinforcements must be not less than 12 gauge steel. All cutouts and reinforcements must be protected with pressed steel mortar guards on the inside of the frame.
 7. Floor Anchors: Formed of not less than 12 gauge steel and securely welded at the bottom of each jamb. Where so scheduled or specified, provide adjustable floor anchors extending down to below the finish floor and providing not less than 2" height adjustment must be provided.
 8. Stiffeners: All frames must be provided with steel spreader angles, temporarily attached to the feet of both jambs to serve as a brace during shipping and handling.
- B. Security Hollow Metal Doors - General: Doors must be of types, sizes and designs noted, fabricated of commercial quality, level, cold-rolled steel conforming to ASTM A 366 or hot-rolled, pickled and oiled steel conforming to ASTM A 569. Metal thickness must be 12 gauge. Phosphate treat material prior to painting. Finished work must be rigid, neat in appearance and free of defects. Form molded members straight and true, with joints coped or mitered, well-formed and in true alignment. Welded joints on exposed surfaces must be dressed smooth, to be invisible. Exterior doors must have a zinc coating applied by the hot-dip process conforming to ASTM A 653/A 653M (A60).
1. Door Faces: Commercial quality leveled cold rolled steel conforming to ASTM designation A366-72 and must be free of scale, pitting or other surface defects. All security hollow metal doors must be as indicated in the door schedule, specifications and as shown on drawings. All doors must be custom made full flush design, internally reinforced, sound deadened and insulated, nominal 2" thick to receive security equipment, locks, and hardware of the elevations, types and sizes shown on the approved shop drawings and schedules. Note: Manufacturer must coordinate frame dimensions to partition widths and thicknesses of doors.
 2. Clearances: Between doors and frame must not exceed 1/8" at head and jambs, 1" under a door with no threshold and 1/8" between vertical meeting edges of pairs of doors. Failure to comply with this portion of the specifications may result in replacement of the noncomplying frames at no cost to the City of New York.
 3. Appearance: All doors must be strong, rigid and neat in appearance, free from warpage, wind or buckle. All bends must be true and straight and a minimum radius of the gauge of metal used.
 4. Construction: Doors must have mild steel face sheets full welded on edges with continuous inner-reinforcements full height and width. Provide internal 10 gauge steel channel banding around complete door perimeter, spot welded to face sheet 3" o.c. Inner reinforcements must be true truss design with triangular form, or interlocking channels with "Z" bar stiffeners, the shape of which cannot be altered without changing the length of the sides. Flat apexes must be resistance spot welded on 2-3/4" centers horizontally and 3" centers vertically. Each flute of reinforcement to be fire and sound insulated with 6 lb. density mineral wool insulation.



5. Edges: Vertical door edges must be beveled 1/8" in 2" and internally reinforced full length with 1/8" thick steel channels welded not over 3" on center inside both door faces. Top and bottom door edges must be closed with continuous recessed 10 gauge channels extending the full width of the door and welded 3" on center maximum to both faces and continuously welded to the vertical door edge channels to form a single perimeter frame inside the door. Top and bottom edges of all doors must be finished flush, except for provisions for weatherproofing.
6. Door Edges: Must be mortised and accurately cut, reinforced, drilled and tapped to receive templated specified hardware in accordance with the approved hardware schedule and hardware manufacturer's recommendations for the proper installation of all hardware and security equipment.
7. Removable Stops: The removable stop must consist of 1-1/4"x 1-1/4"x 10 gauge steel angle securely fastened to the frame using machine security screws at 8" on center maximum as necessary to satisfy the performance criteria outlined in this specification. All exposed screw heads must be round, pan, or oval type and must be torx drive, tamperproof. Stops must be tight fitting and mitered at corner joints. Plastic guards covering the glazing stops and screws must be installed on all frames prior to grouting. The manufacturer must submit an engineering report by an independent materials testing laboratory certifying the successful completion of the following performance test for removable glass stop: There must be a minimum of 1" glass engagement.
8. Finish: Before assembly, all door surfaces must be thoroughly cleaned and coated inside and out with a fine grade corrosion resistant iron oxide-zinc chromate primer. After fabrication, make all faces and vertical edges smooth, level and free of all irregularities. Doors must be bonderized or phosphate treated to ensure maximum paint adhesion and coated on all exposed surfaces with a rust inhibitive primer which must be fully cured before shipment.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Placement: Set frames accurately in location, alignment, and elevation, plumb, level, true, and free of rack, measured from established lines and levels, and firmly anchor at the floor and head as indicated in the drawings and as directed by the shop drawing installation instructions.
- B. The contractor must field modify doors and frames for proper hardware operation at no additional cost to the City of New York.

END OF SECTION 08 34 53



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 08 71 00 – FINISH HARDWARE

PART 1 GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Work of this Section includes all labor, materials, equipment and services necessary to furnish all the finish hardware as shown on the drawings and/or specified herein.
- B. Related Sections:
 - 1. Section 08 11 13 "Hallow Metal Doors and Frames"
 - 2. Section 08 34 53 "Security Doors and Frames"
 - 3. Section 08 31 13 "Access Doors and Frames"
 - 4. Section 10 21 13 "Toilet Compartments"

1.3 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Hardware shall be suitable and adapted for its required use and shall fit its designated location. Should any hardware as shown, specified or required fail to meet the intended requirements or require modification to suit or fit the designated location, determine the correction or modification necessary and notify the Commissioner in ample time to avoid delay in the manufacture and delivery of hardware.
- C. For fire rated openings provide hardware complying with NFPA Standard No. 80.
- D. Barrier Free Requirements: Maximum pressure applied to the latch area to open exterior doors shall not exceed fifteen (15) pounds. Interior doors which have a self-closing feature shall require pressure not to exceed five (5) pounds.

1.4 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Before any finish hardware is ordered or purchased, submit catalog cuts and a complete Hardware Schedule of Finish Hardware. Each item listed in the Hardware Schedule shall be identifiable with respect to manufacture, brand, catalog number, material, and finish.
- C. Where submission differs from Schedule given herein, use different color or other means of identification to bring change to the attention of the Commissioner.



D. Samples: Submit samples as requested by Commissioner. Do not proceed with installation until samples have been approved. Approved samples may be installed in the work after substantial completion of work. Samples shall include one (1) each of the following samples:

1. Hinge (each type)
2. Intermediate Pivot
3. Surface Closer
4. Lockset (office function)
5. Floor Stop

1.5 PRODUCT HANDLING

- A. Pack finish hardware in approved manufacturer's containers, complete with trimmings, bolts, screws, washers, etc., as required for application and securement. Each container shall bear a suitable label which shall state the quantity and kind of contents of said container, as well as identifying marks relating to the approved Hardware Schedule and its location in the project.
- B. Knobs, handles, pulls and other items of finish hardware with easily damaged finishes shall be individually wrapped before placing in containers and with sufficient sheet cloth or cotton-backed paper which shall be adequately tied with heavy strings; all as necessary to protect the finishes.
- C. Finish hardware shall be delivered, as directed, to the building site or the factories of the various fabricators of metal work to which such hardware is to be applied. Deliver hardware in the order required and in ample time to permit application at the building, or fabricators' shops, within the time required for the completion of the building.

1.6 JOB CONDITIONS

- A. Field Service: The hardware supplier shall assign a competent representative, acceptable to the Commissioner, to be at the jobsite each time a major shipment of finish hardware is received. Such representative shall assist in "checking in" these shipments and shall secure a receipt covering the contents of each shipment. In addition, such representative shall be available for immediate call to the jobsite when, in the opinion of the Commissioner, his presence is necessary.
- B. Templates: Promptly following approval of the Hardware Schedule by the Commissioner, furnish and deliver template information, to the fabricators, of items to which finish hardware is to be applied.
 1. Such deliveries shall be made in ample time to avoid delays in such work of said fabricators. Provide drawings, schedules and detailed information to other trades as necessary for them to accommodate and prepare their work to receive the finish hardware.
 2. Cooperation and Coordination
 - a. Cooperate and coordinate work with that of other trades supplying materials or performing work in contact with, connecting to, underlying, or overlaying the work of this Section.
 - b. Provide complete data of requirements for work of this Section to those other trades whose work is affected by or dependent upon the work of this Section.



- c. Furnish all items to be built into other work in ample time to avoid delaying the progress of such work.
- d. Examine all drawings covering the work of this Section and refer to all other drawings, including mechanical and electrical drawings, which may affect the work of this Section or require coordination by this trade.

PART 2 PRODUCTS

2.1 GENERAL

- A. Requirements for design, grade, function, finish, size and other distinctive qualities of each type of finish hardware are indicated herein. Products are identified by using appropriate hardware designation numbers.
- B. Manufacturers are listed for each hardware type required. Provide either the product designated, or approved equal.
- C. Finish hardware shall conform to the applicable requirements of the American Insurance Association, and the National Board of Fire Underwriters' Laboratories, Inc., and other local authorities having jurisdiction, and each such item shall bear a label or mark of the Underwriters' Laboratories, Inc., indicating its conformity with such requirements for use in connection with its specified location.
- D. Finish hardware shall be uniform in color and finish and free from imperfections affecting its appearance, function, operation and serviceability. Such hardware shall be suited and adapted to its required use and shall fit its respective location.
- E. Where the finished shape or size of members receiving finish hardware are such as to prevent or render unsuitable the use of the specific types or sizes of such hardware, suitable types or sizes shall be furnished, having as nearly as practicable the same function, operation and quality as the specified hardware.
- F. Bolts, screws and other fastenings required for the application of the finished hardware shall be of size and type to fit requirements and shall be of the same material and finish as the exposed parts of such hardware which they adjoin. Exposed screws and bolts shall have countersunk oval heads and bolts shall be provided with cap nuts. Countersunk part of screw and bolt holes shall be finished smoothly without sharp edges and form a firm seal for such screw and bolt heads. Full threaded wood screws shall be furnished for all wood applications. No thru bolts will be allowed.

2.2 PRODUCTS AND MANUFACTURERS

- A. See A-005 for Hardware schedule and Sets.

2.3 SPECIFIC ITEMS

- A. Hinges
 - 1. Minimum of three (3) hinges per door leaf up to 7'-6" high. Provide one additional hinge per 2'-6" or fraction thereof.
 - 2. Hinges shall be of types, sizes and materials as required to suit door weights thicknesses and fire ratings.
 - 3. Hinge sizes shall be detailed so that the least amount of projection shall be visible from the frame.



4. Unless otherwise specified hinges shall have concealed ball-bearings (combination anti-friction or oil impregnated) and three (3) knuckles.
 - a. Standard doors shall have non-rising pins.
 - b. Doors exposed to the public, and other secure areas, as determined by the Commissioner, shall have non-removable pins.
 5. Electric Hinges: Coordinate voltage and other electrical requirements with applicable portions of Division 26 "Electrical".
- B. Pivots
1. Provide quantities and types of pivots (offset, intermediate and center) as required to suit door sizes and weights.
 2. Pivot sets (offset and center) shall consist of top and bottom pivots, unless otherwise indicated.
 3. Provide a top pivot for each floor closer unless otherwise indicated.
- C. Closers
1. Unless otherwise indicated, closers shall not be visible on the public side of doors. Closers opening into public spaces shall be provided with parallel arms and brackets to suit.
 2. Closers shall be sized in accordance with the accepted manufacturer's standards to suit height, width, weight of door and draft conditions.
 3. Provide a top pivot for each floor closer.
 4. Provide weather sealing compound for each exterior floor closer.
- D. Locking and Latching Devices
1. Mechanical: Provide types, functions, as specified. Coordinate with the City of New York's keying requirements.
 2. Electric Lock: Electric locks shall be fail safe and shall be deactivated by fire suppression system and devices (local and/or remote) as determined by the Commissioner.
 - a. Coordinate voltage and other electrical requirements with applicable portions of Division 26 "Electrical".
 3. Electric Strike: Electric locks shall be fail safe and shall be deactivated by fire suppression system and devices (local and/or remote) as determined by the Commissioner.
 - a. Coordinate voltage and other electrical requirements with applicable portions of Division 26 "Electrical".
- E. Keys and Keying
1. Coordinate new keying requirements with requirements of building standard keying system.



2. Provide three (3) keys for each differently keyed lock. Unless otherwise indicated, locks shall be keyed differently.
 - a. Locks to the following spaces shall be keyed alike:
 - 1). Mechanical Equipment Rooms, Electrical Panel Rooms, and Telephone Equipment Rooms.
 - 2). Janitor's Closets.
 3. Provide one hundred (100) key blanks.
 4. Provide three (3) Master Keys.
 5. Provide key control system, including key cabinet with capacity to store 150% of keys furnished.
 6. Final keying requirements will be determined by the Commissioner.
- F. Stops: Provide stops to limit the degree of opening, helping to prevent damage to adjacent walls, columns, equipment, the door or its hardware.
1. Floor Stops: All stops to be fastened to concrete shall use expansion shields and machine screws.
- G. Pushes and Pulls: Provide concealed fasteners where practical. Where exposed fasteners are required provide flush type finished to match push or pull.
- H. Flush Bolts: Provide top and bottom extension type flush bolts, mounted twelve (12) inches and seventy-two (72) inches respectively from the bottom of each door, where scheduled. Provide each bottom flush bolt with a dustproof strike.
- I. Silencers: Provide silencers for all non-gasketed and non-weatherstripped frames. Provide three (3) for each single swing door and two (2) for each pair of doors.

2.4 FINISHES

- A. Provide finish hardware with the finishes shown on A-005.

PART 3 EXECUTION REQUIREMENTS

3.1 GENERAL

- A. Refer to DDC General Conditions for execution requirements.

3.2 HARDWARE SETS

- A. See Hardware sets on A-005.

END OF SECTION 08 71 00



SECTION 08 81 26 - INTERIOR GLASS GLAZING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Frameless mirrors.
 - 2. Detention security glazing.
- B. Related Sections
 - 1. Section 10 28 13 "Toilet Accessories", for framed bathroom mirror units.

1.3 REFERENCES

- A. Comply with the recommendations of the following references unless more stringent requirements are indicated herein.
 - 1. FGMA Publications: FGMA Glazing Manual.
 - 2. LSGA Publications: LSGA Design Guide.
 - 3. Safety Glass: Products complying with ANSI Z97.1 and testing requirements of 16 CFR Part 1201, Safety Standards for Architectural Glazing, Sealed Insulating Glass Manufacturing Association.
 - 4. ASTM C 920, Elastomeric Joint Sealant.

1.4 PERFORMANCE REQUIREMENTS

- A. General: Provide glazing systems capable of withstanding normal thermal movement and impact loads (where applicable) without failure, including loss or glass breakage attributable to the following: defective manufacture, fabrication, and installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.
- B. Provide annealed, heat strengthened, fully tempered or laminated glass units where required to meet safety glazing requirements, as shown, specified, or recommended by the glass fabricator, and as required by the New York City Building Code.

1.5 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: Submit manufacturer's printed product data, specifications, standard details, installation instructions, use limitations and recommendations for each material used. Provide certifications that materials and systems comply with specified requirements, including performance requirements.



- C. Submit compatibility and adhesion test reports from sealant manufacturer indicating materials were tested for compatibility and adhesion with glazing sealant, as well as other glazing materials including insulation units.
- D. Initial Selection Samples: Submit samples of each glass and glazing material showing complete range of colors, textures, and finishes available for each material used.
- E. Verification Samples: Submit representative samples of each glass and glazing material that is to be exposed in completed work. Show full color ranges and finish variations expected. Provide glass samples having minimum size of 144 sq. in. and 6 in. long samples of sealants and glazing materials; all samples must bear the name of the manufacturer, brand name, thickness, and quality.
- F. Test Reports: Provide certified reports for specified tests.
- G. Warranties: Provide written warranties as specified herein.

1.6 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Source: For each glass and glazing type required for work of this Section, provide primary materials which are products of one manufacturer. Provide secondary or accessory materials which are acceptable to manufacturers of primary materials.
- C. Installer: A firm with a minimum of three years' experience in type of work required by this Section and which is properly instructed by manufacturers of primary materials; and with a successful record of in-service installations similar in size and scope to this Project.
- D. Glass Thickness: Glass thicknesses shown on drawings and/or specified herein are minimum thicknesses. Determine and provide size and thickness of glass products that are certified to meet or exceed performance requirements specified in this Section.
- E. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below, unless more stringent requirements are indicated.
 - 1. GANA Publications: GANA's "Glazing Manual" and "Laminated Glass Design Guide."
- F. Safety Glazing Products: Comply with testing requirements in 16 CFR 1201.
 - 1. Subject to compliance with requirements, obtain safety glazing products permanently marked with certification label of the Safety Glazing Certification Council.
 - 2. Where glazing units, including Kind FT glass and laminated glass, are specified in Part 2 articles for glazing lites more than 9 sq. ft. in exposed surface area of one side, provide glazing products that comply with Category II materials, for lites 9 sq. ft. or less in exposed surface area of one side, provide glazing products that comply with Category I or II materials, except for hazardous locations where Category II materials are required by 16 CFR 1201 and the New York City Building Code.

1.7 PROJECT CONDITIONS

- A. Temperature Limits: Install sealants only when temperatures are within limits recommended by sealant manufacturer, except, never install sealants when temperatures are below 40 deg. F.



1.8 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials and products in unopened, factory labeled packages. Store and handle in strict compliance with manufacturer's instructions and recommendations and GANA Manual.
 - 1. Protect materials from moisture, sunlight, excess heat, sparks and flame.
 - 2. Sequence deliveries to avoid delays, but minimize on-site storage.

1.9 WARRANTIES

- A. **Manufacturer's Warranty on Coated Glass Products:** Provide written warranty signed by manufacturer of coated glass agreeing to furnish f.o.b. point of manufacture, within specified warranty period indicated below, replacements for those coated glass units which develop manufacturing defects. Manufacturing defects are defined as peeling, cracking or deterioration in metallic coating due to normal conditions and not due to handling or installation or cleaning practices contrary to glass manufacturer's published instructions.
 - 1. **Warranty Period:** Manufacturer's standard but not less than five (5) years after date of substantial completion.
- B. **Manufacturer's Warranty on Laminated Glass:** Manufacturer's standard form, made out to the City of New York and signed by laminated glass manufacturer agreeing to replace laminated glass units that deteriorate as defined in "Definitions" Article, f.o.b. the nearest shipping point to Project site, within specified warranty period indicated below.
 - 1. **Warranty period** five (5) years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS/FABRICATORS

- A. **Manufacturers:** Subject to compliance with requirements, provide products by one of the following:
 - 1. PPG Industries.
 - 2. Guardian Industries.
 - 3. Pilkington.
 - 4. AFG.
 - 5. JE Berkowitz, LP.
 - 6. Viracon.
 - 7. Global Security Glazing
 - 8. Or approved equal.

2.2 GLASS MATERIALS AND PRODUCTS

- A. **Clear Float Glass:** ASTM C 1036, Type I (Transparent, Flat), Class 1 (Clear), Quality q3, minimum 1/4" thick.
- B. **Float Glass:** ASTM C 1036, Type I (transparent, flat), Class 1 (clear) or Class 2 (tinted) as indicated, Quality q3, minimum 1/4" thick.



- C. Heat-Strengthened Float Glass: ASTM C 1048, Kind HS (heat strengthened), Type I, Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality q3. Fabricate by horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.
- D. Tempered Glass: ASTM C 1048, Condition A (uncoated), Type I (transparent, flat), Class 1 (clear) or Class 2 (tinted) as indicated, Quality q3, Kind FT, minimum 1/4" thick. Tempered glass must be certified by SGCC to meet applicable standards.
1. Performance Requirements for Tempered Glass
 - a. Length and Width: For 2.9 mm to 6.0 mm; +/-1.6 mm.
 - b. Diagonal: +/- 3.0 mm.
 - c. Edgework: Belt seaming or diamond wheels. 1.5 mm seam of upper and lower glass edges. No sharp edges.
 - d. Corners: No more than 3.0 mm from square.
 - e. Float Glass Defects: Must meet the requirements of ASTM C 1036. The most common defects are scratches, stones gaseous bubbles and edge chips. Tables in the glass standards have limits for size/quantity of defects.
 - f. Minimum surface compression: 10,000 psi.
 - g. Tempered glass to be heat-treated by horizontal (roller hearth) process with inherent roller-wave distortion parallel to the bottom edge of the glass when installed.
 - h. Flatness Tolerances
 - 1). Roller-Wave or Ripple: The deviation from flatness at any peak targeted not exceed 0.003" as measured per peak to valley for 1/4" (6mm) thick glass.
 - 2). Bow and Warp: The bow and warp tolerances must not exceed 1/32" per linear foot.
 - 3). Fully tempered glass: Heat soaked to EN 14179-1:2005-European Heat Soaking Standard.
- E. Laminated Safety Glass: Provide two glass panes of equal thickness, laminated together with a polyvinyl butyl interlayer, 0.030" thick at vertical applications, and 0.060" thick at sloped or horizontal applications, conforming to ASTM C 1172 and as follows:
1. Interlayer Color: Clear unless otherwise noted.
 2. PVB Interlayers:
 - a. Product: Subject to compliance with requirements, provide one of the following:
 - 1). Eastman Chemical; Saflex or Vanceva
 - 2). DuPont; Butacite
 - 3). Everlam; PVB Interlayer
 - 4). or approved equal.
 3. Laminated Glass Minimum Thickness: 1/4"
- F. Frameless Mirrors: 1/4", Quality q2, clear float glass with silver, copper, and organic coating, edges uniformly ground and polished.
- G. Detention Security Glazing
1. Sole Source Product: Global Security Glazing; Secur-Term + Poly SP019, Glass Clad Polycarbonate.



- a. No Substitutions Permitted.

2.3 GLAZING MATERIALS AND PRODUCTS

- A. General: Provide sealants and gaskets with performance characteristics suitable for applications indicated. Ensure compatibility of glazing sealants with insulating glass sealants, with laminated glass interlayers, and with any other surfaces in contact.
- B. General Glazing and Cap Bead Sealant: Provide sealant with maximum Shore A hardness of 50. Provide one of the following:
1. Dow Corning 795.
 2. General Electric Silglaze N 2500 or Contractors SCS-1000.
 3. Tremco Spectrem 2.
 4. or approved equal.
- C. Dense Elastomeric Compression Seal Gaskets: Provide molded or extruded neoprene or EPDM gaskets, Shore A hardness of 75 ± 5 for hollow profile, and 60 ± 5 for solid profiles, ASTM C 864.
- D. Cellular, Elastomeric Preformed Gaskets: Provide extruded or molded closed cell, integral-skinned neoprene, Shore A 40 ± 5 , and 20% to 35% compression, ASTM C 509; Type II.
- E. Preformed Glazing Tape: Provide solvent-free butyl-polyisobutylene rubber with 100% solids content complying with ASTM C 1281 AAMA A 800 with integral continuous EPDM shim. Provide preformed glazing tape in extruded tape form.
- F. Setting Blocks: Provide 100% silicone blocks with Shore A hardness of 80-90. Provide products certified by manufacturer to be compatible with silicone sealants. Length to be not less than 4". Width for setting blocks to be 1/16" more than glass thickness and high enough to provide the lite recommended by glass manufacturer. When thickness of setting block exceeds 3/4" the glass manufacturer must be consulted for sizes and configuration. In a vented system, provide setting block designed so as to not restrict the flow of water within the glazing rabbet to the weep holes.
1. Shims: For shims used with setting blocks, provide same materials, hardness, length and width as setting blocks.
 2. Structural Silicone Glazing: Provide silicone setting blocks where structural silicone occurs at sills and at insulating units with silicone edge seals.
- G. Edge Blocks: Provide neoprene or silicone as required for compatibility with glazing sealants. Provide blocks with Shore A hardness of 55 ± 5 .
- H. Spacers: Elastomeric blocks or continuous extrusions with a Shore A durometer hardness required by glass manufacturer to maintain glass lites in place.
- I. Miscellaneous Glazing Materials: Provide sealant backer rods, primers, cleaners, and sealers of type recommended by glass and sealant manufacturers.
- J. Mirror Adhesive: Adhesive mastic for adhering glass plate. Mastic must be compatible with mirror backing.



1. Clips: No. 4 finish Type 304 stainless steel.

K. Glazing Surface Films: Provide Safety and Security Film.

1. 3M; Scotchshield Safety & Security Window Film Ultra Series (clear)
2. Madico; SafetyShield (clear)
3. Purlfrost; 175 Micron Safety Film (clear)
4. Or approved equal.

2.4 FABRICATION OF GLASS AND OTHER GLAZING PRODUCTS

- A. Fabricate glass and other glazing products in sizes required to glaze openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing standard, to comply with system performance requirements.
- B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites in a manner that produces square edges with slight kerfs at junctions with indoor and outdoor faces.
- C. Grind smooth and polish exposed glass edges.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

3.3 GENERAL GLAZING STANDARDS

- A. Install products using the recommendations from the manufacturer of glass, sealants, gaskets and other glazing materials, except where more stringent requirements are indicated, including those in the GANA "Glazing Manual."
- B. Install glass in prepared glazing channels and other framing members.
- C. Install setting blocks in rabbets as recommended by referenced glazing standards in GANA's "Glazing Manual."
- D. Provide bite on glass, minimum edge and face clearances and glazing material tolerances recommended by GANA's "Glazing Manual."
- E. Provide weep system as recommended by GANA's "Glazing Manual."
- F. Set glass lites in each series with uniform pattern, draw, bow and similar characteristics.
- G. Distribute the weight of glass unit along the edge rather than the corner.



- H. Comply with manufacturers and referenced industry standards on expansion joint and anchors; accommodating thermal movement; glass openings; use of setting blocks, edge, face, and bite clearances; use of glass spacers; edge blocks and installation of weep systems.
- I. Protect glass edge damage during handling and installation.
- J. Prevent glass from contact with contaminating substances that result from construction operations, such as weld spatter, fireproofing or plaster.
- K. Remove and replace glass that is broken, chipped cracked or damaged in any way.

3.4 GLAZING

- A. Glazing channel dimensions, as indicated on Shop Drawings, provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances. Adjust as required by Project conditions during installation.
- B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass is glass with edge damage or other imperfections that, when installed, could weaken glass and impair performance and appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction sealant-substrate testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead. Install setting blocks at the one greater points of each lite along the horizontal mullion.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Provide spacers for glass lites where the length plus width is larger than 50 inches as follows:
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
 - 2. Provide 1/8-inch minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and according to requirements in referenced glazing publications.
- H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.
- I. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.
- J. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended by gasket manufacturer.



K. Flush Glazing

1. If the butt joint in the metal framing is in the vertical direction, run the tape initially on the head and sill members going directly over this joint. Should the butt joint in the metal framing run horizontally, tapes must first be applied to the jambs so that it crosses over the joint.
2. Each tape section must butt the adjoining tape and be united with a tool to eliminate any opening.
3. Do not overlap the adjoining length of tape or rubber shim as this will prevent full contact around the perimeter of glass.

L. Off-Set Glazing

1. Where the glazing legs are off-set, compensate the difference in the rabbet width by employing different glazing tapes with different diameter shims. The difference in shim must be equal to the size of the off-set. Position the thinner tape first on the glazing leg closest to the interior. Cut the thicker tape to the exact length of the dimension between the applied tapes, and install on the outermost glazing leg.
2. Immediately prior to setting glass, remove paper backing. Apply a toe bead of sealant 6" in each direction, from each corner.
3. Locate setting blocks in the sill member at quarter points, or if necessary to within 6" of each corner. Setting blocks must be set equal distance from center line of the glass and high enough to provide the recommended bite and edge clearances.
4. Set edge block according to glass manufacturer's recommendations.
5. Set Glass: Press the glass firmly against the tape to achieve full contact.
6. In a vented system, apply a heel bead (air seal) of sealant around the perimeter of glass, between the sole of the I.G. unit and the base of the rabbet of the metal framing developing a positive bond to the unit and to the metal framing. Install bead of sealant deep enough so that it will partially fill the channel to a depth of 1/4" between the glass edge and the base of the metal framing rabbet.
7. Set interior stops, and roll glazing tape spline for the appropriate face clearance into place, compressing the glass to the shim within the glazing tape.

3.5 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Where framing joints are vertical, cover these joints by applying tapes to heads and sills first and then to jambs. Where framing joints are horizontal, cover these joints by applying tapes to jambs and then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Do not remove release paper from tape until just before each glazing unit is installed.
- F. Apply heel bead of elastomeric sealant as recommended by glass manufacturer or glass frame manufacturer.



- G. Center glass lites in openings on setting blocks and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- H. Apply cap bead of elastomeric sealant over exposed edge of tape where noted on approved shop drawings.

3.6 GASKET GLAZING (DRY)

- A. Fabricate compression gaskets in lengths recommended by gasket manufacturer to fit openings exactly, with stretch allowance during installation.
- B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.
- C. Center glass lites in openings on setting blocks and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended by gasket manufacturer.
- D. Install gaskets so they protrude past face of glazing stops.

3.7 SEALANT GLAZING (WET)

- A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.
 - 1. Set exterior glazing gasket a minimum of 1/8" below exterior glazing stop to create a channel for sealant installation.
- B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.
- C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.8 FRAMELESS MIRRORS

- A. Apply mastic to back of mirror "pats" spaced 4 pats/sq. ft.; adjust mirror so that it is plumb and in place to avoid distortion of reflecting images. Allow 1/8" space between back of mirror and wall surface.
 - 1. Apply "pats" using an electric applicator.
- B. Apply stainless steel clips at mirror top and bottom; securely clip to substrate using non-corrosive anchors. At drywall back-up anchors must be secured to studs or steel wallplate spanning from stud to stud.



3.9 PROTECTION AND CLEANING

- A. Protect glass from contact with contaminating substances resulting from construction operations, including weld splatter. If, despite such protection, contaminating substances do come into contact with glass, remove them immediately as recommended by glass manufacturer.
- B. Remove and replace glass that is broken, chipped, cracked, abraded, or damaged in any way, including natural causes, accidents, and vandalism, during construction period.
- C. Clean excess sealant or compound from glass and framing members immediately after application, using solvents or cleaners recommended by manufacturers.
- D. Glass to be cleaned according to:
 - 1. GANA Glass Informational Bulletin GANA 01-0300 – "Proper Procedure for Cleaning Architectural Glass Products."
 - 2. GANA Glass Informational Bulletin GANA TD-02-0402 – "Heat Treated Glass Surfaces are Different."
- E. Do not use razor blades, scrapers or metal tools to clean glass.

END OF SECTION 08 81 26



SECTION 09 21 16 - GYPSUM BOARD ASSEMBLIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Gypsum board work for partitions, ceilings, column enclosures, furring, and elsewhere where gypsum drywall work is shown on drawings.
2. Metal supports for gypsum drywall construction.
3. Acoustical insulation for gypsum drywall work.
4. Sealant for gypsum drywall work.
5. Concealed metal reinforcing for attachment of railings, toilet partitions and other items supported on drywall partitions and walls.
6. Taping and finishing of drywall joints.
7. Installing rings and frames in drywall surfaces for grilles, registers and lighting fixtures.
8. Bracing and connections.

- B. Related Sections

1. Section 07 84 00 "Firestopping "
2. Section 08 11 13 "Hollow Metal Doors and Frames"
3. Section 09 90 00 "Painting and Coating"
4. Section 23 37 13 "Diffusers, Registers and Grilles"
5. Section 26 51 00 "Interior Lighting"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Submit shop drawing for each drywall partition, furring and ceiling system showing size and gauges of framing members, hanger and anchorage devices, wallboard types, insulation, sealant, methods of assembly and fastening, control joints indicating column lines, corner details, joint finishing and relationship of drywall work to adjacent work.
- C. Samples: Each material specified herein, 12" x 12", or 12" long, or in manufacturer's container, as applicable for type of material submitted.
- D. Manufacturer's Literature: Submit technical and installation instructions for each drywall partition, furring and ceiling system specified herein, and for each fire-rated and sound-rated gypsum board assembly. Submit other data as required to show compliance with these specifications, including data for mold resistant joint compound.



- E. Test Reports: Submit test report, obtained by drywall manufacturer, indicating conformance of drywall assemblies to required fire ratings and sound ratings.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. The following standards, as well as other standards which may be referred to in this Section, apply to the work of this Section:
 - 1. The Gypsum Construction Handbook, latest edition, USG.
 - 2. Construction Guide, latest edition, National Gypsum.
 - 3. ASTM A 568 "Standard Specification for Steel, Sheet, Carbon, and High-Strength, Low-Alloy, Hot-Rolled and Cold-Rolled, General Requirements For"
 - 4. ASTM C 475 "Standard Specification for Joint Treatment Materials For Gypsum Wallboard Construction"
 - 5. ASTM C 645 "Standard Specification for Non-Structural Steel Framing Members"
 - 6. ASTM C 754 "Standard Specification for Installation of Steel Framing Members to Receive Screw Attached Gypsum Panel Products"
 - 7. ASTM C 840 "Standard Specification for Application and Finishing of Gypsum Board"
 - 8. ASTM C 919 "Standard Specification for Use of Sealants in Acoustical Applications"
 - 9. ASTM C 954 "Standard Specification for Steel Drill Screws For the Application of Gypsum Board or Metal Plaster Bases to Steel Studs From 0.033 in. to 0.112 in. in Thickness"
 - 10. ASTM C 1002 "Standard Specification for Steel Self-Piercing Tapping Screws For the Application of Gypsum Board"
 - 11. ASTM C 1177 "Standard Specification for Glass Mat Gypsum Substrate for Use as Sheathing"
 - 12. ASTM C 1178 "Standard Specification for Glass Mat Water Resistant Gypsum Backing Board"
 - 13. ASTM C 1278 "Standard Specification for Fiber-Reinforced Gypsum Panel"
 - 14. ASTM C 1396 "Standard Specification for Gypsum Board"
 - 15. ASTM D 3273 "Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber"
- C. Allowable Tolerances: 1/32" offsets between planes of board faces, and 1/16" in 8'-0" for plumb, level, warp and bow.
- D. System Design Load
 - 1. Provide standard drywall wall assemblies designed and tested by manufacturer to withstand a lateral load of 5 lbs. per sq. ft. for the maximum wall height required, and with deflection limited to L/240 of partition height.
 - a. Drywall assemblies with tile finish must have a deflection limit of L/360.
 - 2. Provide drywall ceiling assemblies designed, fabricated and installed to have a deflection not to exceed L/360.
- E. Fire-Resistance Rating: Where gypsum drywall with fire resistance ratings are indicated, provide materials and installations which are identical with those of applicable assemblies tested per ASTM E 119 by fire testing laboratories, or to design designations in UL "Fire Resistance Directory" or in listing of other testing



agencies acceptable to the Commissioner, and compliant with UL Test #2079; criteria for cycle movement for all field height wall sections requiring allowance for vertical deflection within framing details.

- F. Installer: Firm with not less than 3 years of successful experience in the installation of specified materials.

1.5 JOB MOCK-UP

- A. Build a portion of a finished wall and ceiling demonstrating the quality of work, including finishing, to be obtained under this Section. Omit drywall boards in locations as directed by the Commissioner to show stud spacing and attachments; after acceptance, complete assembly.
- B. Adjust the finishing techniques as required to achieve the finish required by the Commissioner as described in this Section.
- C. Upon approval of the mock-up, the mock-up may be left in place as a portion of the finished work of this Section.
- D. All drywall work must be equal in quality to approved mock-up.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers for Gypsum Drywall Panels and Accessories: U.S. Gypsum Co., Georgia Pacific, CertainTeed Corporation, Continental, National Gypsum Co. or approved equal.
- B. Manufacturers for Metal Supports of Drywall Assemblies: Unless otherwise noted, provide products manufactured by ClarkDietrich Building Systems, Super Stud Building Products, Marino/Ware, or approved equal.

2.2 METAL SUPPORTS

- A. Metal Floor and Ceiling Runners
 - 1. Channel Type: Formed from 20 U.S. Std. gauge (unless otherwise noted) galvanized steel, width to suit channel type metal studs. Use 20 ga. top runners with 1-1/4" minimum flanges.
 - 2. Ceiling runners and head of wall connections at rated partitions are to conform to UL #2079 for cycle movement. Provide positive mechanical connection of framing to structure, allowing for vertical movement within connections. Minimum of 20 ga. galvanized steel for clips, 25 ga. galvanized steel for ceiling runners. Providing a friction free – anti-seizure movement capacity.
 - a. As manufactured by the Steel Network, VertiClip or VertiTrack or equal made by Metal-Lite Inc., Fire Trak Corporation or approved equal.
 - b. FireTrak (including stud clips) by Fire Trak Corporation or equal made by Metal-Lite Inc. ClarkDietrich Building Systems or approved equal.



B. Metal Studs, Framing and Furring

1. Channel Type Studs: Channel type with holes for passage of conduit formed from minimum 20 U.S. Std. gauge (unless heavier gauge is required to meet deflection limits) galvanized steel, width as shown on drawings.
2. Furring Channels: Hat shaped, formed from galvanized steel, 25 U.S. Std. gauge.
3. Continuous 16 gauge x 8" wide steel wall plate screwed to studs as required for support of railings, toilet partitions and other items supported on drywall partitions and walls.

C. Suspended Ceiling and Fascia Supports

1. Main Runners: 1-1/2" steel channels, cold rolled at 0.475 lbs. per ft., rust-inhibitive paint finish.
2. Furring Members: Screw-type hat-shaped furring channels of 25 ga. zinc-coated steel; comply with ASTM C 645.
3. Hangers: Galvanized, 1" x 3/16" flat steel slats capable of supporting 5x calculated load supported.
4. Hanger Anchorages: Provide inserts, clips, bolts, screws and other devices applicable to the required method of structural anchorage for ceiling hangers. Size devices for 5x calculated load supported.
5. Furring Anchorages: 16 ga. galvanized wire ties, manufacturer's standard clips, bolts or screws as recommended by furring manufacturer.

D. All galvanized steel members are to have coating conforming to ASTM A 653, G60.

2.3 GYPSUM WALLBOARD TYPES

A. Gypsum Wall Board: 5/8" thick unless otherwise noted, 48" wide, in maximum lengths available to minimize end-to-end butt joints. Subject to compliance with requirements, provide one of the following:

1. "Sheetrock" by USG,
2. "Gold Bond" by National Gypsum,
3. "Regular Gypsum" by CertainTeed Corp.,
4. or approved equal,

B. Fire Rated Gypsum Wall Board: 5/8" thick unless otherwise noted, 48" wide, in maximum lengths available to minimize end-to-end butt joints. Subject to compliance with requirements, provide one of the following:

1. "Sheetrock Firecode C" by USG,
2. "Firecheck Type C" by Lafarge/Continental,
3. "Gold Bond Fireshield" by National Gypsum,
4. or approved equal, .

C. Water Resistant Backing Board for Tile Finish: 5/8" thick unless otherwise noted. Cover joints with a pressure sensitive woven glass fiber tape. Subject to compliance with requirements, provide one of the following:

1. "Fiberock Aqua-Tough" by USG,



2. "Dens-Shield Tile Backer Board" by Georgia Pacific,
 3. "DiamondBack Tile Backer" by CertainTeed Corp.,
 4. or approved equal.
- D. Moisture/Mold Resistant Gypsum Wall Board at locations listed below, unless otherwise shown on drawings: 5/8" thick unless otherwise noted, 48" wide, in maximum lengths available to minimize end-to-end butt joints. Board must have a rating of 10 per ASTM D 3273 with a core that meets ASTM C 1396, Section 6 or ASTM C 1658. Subject to compliance with requirements, provide one of the following:
1. "Mold Tough" or "Mold Tough FR" by U.S. Gypsum,
 2. "DensArmor Plus" by Georgia Pacific,
 3. "Mold Defense" and/or "Mold Defense Type X" by Lafarge/Continental,
 4. "Gold Bond EXP Interior Extreme Gypsum Board" by National Gypsum,
 5. or approved equal.

For use in the locations below and as noted on the drawings:

1. Areas in toilet rooms, lockers, janitor's closets not scheduled to receive ceramic tile, or where fire rating is required.
2. Walls and ceilings of spaces containing condensers, water tanks, water pumps and pressure reduction valves.
3. Walls of bathrooms that are not solely water closet compartments, other than walls where cement board is specifically required.
4. Walls and ceilings in service sink closets.
5. Portion of walls within 2 feet of mop sinks or service sinks to a height of 4 feet above the floor.
6. All perimeter walls and wet shafts.

2.4 ACCESSORIES

- A. Acoustical Insulation: Paper-less, non-combustible, semi-rigid mineral fiber, 2" thick, in walls (unless otherwise indicated), 3 lb./cu. ft. maximum density; Subject to compliance with requirements, provide one of the following:
1. Thermafiber LLC "Thermafiber,"
 2. Roxul "Comfortbatt,"
 3. Owens Corning "Sound Attenuation Fire Batt Insulation/MW,"
 4. or approved equal.
- B. Fasteners for Wall Board: Type S Bugle Head for fastening wallboard to lighter gauge interior metal framing (up to 20 ga.). Type S-12 Bugle Head for fastening wallboard to heavier gauge interior metal framing (20 ga. to 12 ga.); Type S and Type S-12 Pan Head for attaching metal studs to door frames and



runners; and Type G Bugle Head for fastening wallboard to wall board. Lengths specified below under "Part 3 - Execution" Articles and as recommended by drywall manufacturer.

- C. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.
- D. Metal Trim - Corner Beads: For 90 degree External Corners - 27 U.S. Std. ga. galvanized steel, 1-1/4" x 1-1/4", for 90 degree external corners; ASTM C 1047.
- E. Metal Trim - Edge Beads: Paper-faced galvanized-steel sheet; ASTM C 1047.
- F. Metal Trim Treatment Materials and Joint Treatment Materials for Gypsum Drywall Boards: Paper tape for joint reinforcing; setting type or lightweight setting type joint compound for taping and topping; and ready-mix compound for finishing.
 - 1. For mold-resistant drywall, water resistant drywall, and tile backer board, use glass mesh tape with setting joint compound that is rated 10 when tested in accordance with ASTM D 3273 and evaluated in accordance with ASTM D 3274.
 - 2. Joint Compound
 - a. Product: Subject to compliance with requirements, provide one of the following:
 - 1). CTS Cement Manufacturing Corp.; Rapid Set One Pass
 - 2). Lafarge North America; Rapid Joint
 - 3). CertainTeed; M2Tech 90
 - 4). Or approved equal.
- G. Control Joints
 - 1. Basis-of-Design Product: Subject to compliance with requirements, provide USG; No. 0.093 or comparable product by one of the following:
 - a. Lafarge
 - b. National Gypsum
 - c. Or approved equal.
- H. Acoustical Sealant
 - 1. Product: Subject to compliance with requirements, provide one of the following:
 - a. USG; Sheetrock Brand Acoustical Sealant
 - b. Tremco Mfg. Co.; Tremco Acoustical Caulking
 - c. Pecora; AIS-919
 - d. Or approved equal.
- I. Neoprene Gaskets: Conform to ASTM D 1056.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 GENERAL INSTALLATION REQUIREMENTS

A. General

1. All metal framing for drywall partitions must extend from floor to underside of structural deck above. Provide for vertical deflection with positive mechanical connections of framing members to structure.
2. Provide concealed reinforcement, 16 ga. thick by eight (8) inches wide or as detailed or as recommended by manufacturer, for attachment of railings, toilet partitions, and other items to be supported on the partitions which cannot be attached to the metal framing members. Concealed reinforcement must span between metal studs and be attached thereto using two (2) self-tapping pan head screws at each stud.

- a. Back of drywall must be scored or notched to prevent bulging out where reinforcement plate occurs.

- B. Fire-Rated Assemblies: Install fire-rated assemblies in accordance with requirements of the New York City Building Code, Underwriters' Laboratories and test results obtained and published by the drywall manufacturer, for the fire-rated drywall assembly types indicated on the drawings.

- C. Acoustical Assemblies: Install acoustically-rated assemblies to achieve a minimum STC as noted on drawings, in accordance with test results obtained and published by the drywall manufacturer, for the drywall assembly type indicated on the drawings.

D. Sealant

1. Install continuous acoustical sealant bead at top and bottom edges of wallboard where indicated or required for sound rating as wallboard is installed, and between metal trim edge beads and abutting construction.
2. Install acoustical sealant in 1/8" wide vertical control joints within the length of the wall or partitions, and in all other joints, specified below under "Control Joints." Install bead of acoustical sealant around electric switch and outlet boxes, piping, ducts, and around any other penetration in the wallboard; place sealant bead between penetrations and edge of wallboard.
3. Where sealant is exposed to view, protect adjacent surfaces from damage and from sealant material, and tool sealant flush with and in same plane as wallboard surface. Provide sealant beads 1/4" to 3/8" diameter.

E. Wall Board Application

1. See drawings for all board types. Use fire-rated wallboard for fire-rated assemblies. Use sag-resistant board for ceilings. Use water-resistant wallboard where indicated on drawings and where wallboard would be subject to moisture. Install water-resistant wallboard in full, large sheets (no scraps) to limit number of butt joints.
2. Apply wallboard with long dimension parallel to stud framing members, and with abutting edges occurring over stud flanges.



3. Install wallboard for partitions from floor to underside of structure above and secure rigidly in place by screw attachment, unless otherwise indicated.
4. Provide safing insulation meeting standards of Section 07 84 00, Firestopping, at flutes of metal deck where partitions carry up to bottom of metal deck.
5. Neatly cut wallboard to fit around outlets, switch boxes, framed openings, piping, ducts, and other items which penetrate wallboard; fill gaps with acoustic sealant.
6. Where wallboard is to be applied to curved surfaces, dampen wallboard on back side as required to obtain required curve. Finish surface must present smooth, even curve without fluting or other imperfections.
7. Screw fasten wallboard with power-driven electric screwdriver, screw heads to slightly depress surface of wallboard without cutting paper, screws not closer than 3/8" from ends and edges of wallboard.
8. Where studs are doubled-up, screw fasten wallboard to both studs in a staggered pattern.

F. Cementitious Backer Board

1. General: Furnish cementitious backer board in maximum available lengths. Install horizontally, with end joints over framing members.
2. Fastening: Secure cementitious backer board to each framing member with screws spaced not more than 12 inches on center and not closer than 1/2" from the edge. Install screws with a conventional screw gun so that the screw heads are flush with the surface of the board.
3. Joint Treatment: Fill space between edge of backer and receptor with dry-set Portland cement or latex-Portland cement mortar. Fill all horizontal and vertical joints and corners with dry-set Portland cement or latex-Portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.

G. Metal Trim: Install and mechanically secure in accordance with manufacturer's instructions; and finish with three (3) coats of joint compound, feathered and finish sanded smooth with adjacent wallboard surface, in accordance with manufacturer's instructions.

1. Corner Beads: Install specified corner beads in single lengths at all external corners, unless corner lengths exceed standard stock lengths.
2. Edge Beads: Install specified edge beads in single lengths at all terminating edges of wallboard exposed to view, where edges abut dissimilar materials, where edges would be exposed to view, and elsewhere where shown on drawings. Where indicated on drawings, seal joint between metal edge bead and adjoining surface with specified gasket, 1/8" wide minimum and set back 1/8" from face of wallboard, unless other size and profile indicated on drawings.
3. Set casing beads in long lengths, neatly butted at joints. Provide casing beads at juncture of board and vertical surfaces and at exposed perimeters.

H. Control Joint Locations: Isolate gypsum board surfaces with control joints where:

1. Ceiling abuts a structural element, dissimilar wall or other vertical penetration.
2. Construction changes within the plane of the partition or ceiling.
3. Shown on approved shop drawings.
4. Ceiling dimensions exceed thirty (30) feet in either direction.
5. Wings of "L," "U," and "T" shaped ceiling areas are joined.
6. Expansion or control joints occur in the structural elements of the building.
7. Partition or furring abuts a structural element or dissimilar wall or ceiling.
8. Partition or furring runs exceed 30' without interruption.



9. Where control joints are required, ceiling height door frames may be used as control joints. Less than ceiling height frames must have control joints extending to the ceiling from both corners.

I. Joint Treatment and Spackling

1. Joints between face wallboards in the same plane, joints at internal corners of intersecting partitions and joints at internal corners of intersections between ceilings and walls or partitions must be filled with joint compound.
2. Fill screw heads and other depressions with joint compound. Apply joint compound in three (3) coats, feather and sand finish surface smooth with adjacent wallboard surface, in accordance with manufacturer's instructions. Treatment of joints and screw heads with joint compound is also required where wallboard will be covered by finish materials which require a smooth surface, such as vinyl wall coverings.

3.3 FURRED WALLS AND PARTITIONS

- A. Use specified metal furring channels. Run metal furring channel framing members vertically, space sixteen (16) inches o.c. maximum. Fasten furring channels to concrete or masonry surfaces with power-driven fasteners or concrete stub nails spaced sixteen (16) inches o.c. maximum through alternate wing flanges (staggered) of furring channel. Shim furring channels as necessary to provide a plumb and level backing for wallboard. At inside of exterior walls, install an asphalt felt protection strip between each furring channel and the wall. Provide furring channel and splices by nesting channels at least eight (8) inches and securely anchoring to concrete or masonry with two (2) fasteners in each wing.
- B. Wallboard Installation: Same as specified under Article 3.4 - "Metal Stud Partitions."

3.4 METAL STUD PARTITIONS

- A. Unless otherwise noted, install steel framing members in accordance with ASTM C 754.
- B. Runner Installation: Use channel type. Align accurately at floor according to partition layout. Anchor runners securely sixteen (16) inches o.c. maximum with power-driven anchors to floor slab, with power-driven anchors to structural slab above. See "Stud Installation" below for runners over heads of metal door frames. Where required, carefully remove sprayed-on fireproofing to allow partition to be properly installed.
- C. Stud Installation
 1. Use channel type, positioned vertically in runners, spaced as noted on drawings, but not more than sixteen (16) inches o.c.
 2. Anchor studs to floor runners with screw fasteners. Provide snap-in or slotted hole slip joint bolt connections of studs to ceiling runners leaving space for movement. Anchor studs at partition intersections, partition corners and where partition abuts other construction to floor and ceiling runners with sheet metal screws through each stud flange and runner flange.
 3. Connection at ceiling runner for non-rated partitions must be snap-in or slotted hole slip joint bolt connection that allows for movement. Seal studs abutting other construction with 1/8" thick neoprene gasket continuously between stud and abutting construction.
 4. Connections for fire rated partitions at ceiling runners must conform to UL Design #2079.



5. Install metal stud horizontal bracing wherever vertical studs are cut or wallboard is cut for passage of pipes, ducts or other penetrations, and anchor horizontal bracing to vertical studs with sheet metal screws.
 6. At jambs of door frames and borrowed light frames, install doubled-up studs (not back to back) from floor to underside of structural deck, and securely anchor studs to jamb anchors of frames and to runners with screws. Provide cross braces from hollow metal frames to underside of slab.
 7. Over heads of door frames, install cut-to-length section of runner with flanges slit and web bent to allow flanges to overlap adjacent vertical studs, and securely anchor runner to adjacent vertical studs with sheet metal screws. Install cut-to-length vertical studs from runner (over heads of door frame) to ceiling runner sixteen (16) inches maximum o.c. and at vertical joints of wallboard, and securely anchor studs to runners with sheet metal screws.
 8. At control joints, in field of partition, install double-up studs (back to back) from floor to ceiling runner, with 1/4" thick continuous compressible gasket between studs. When necessary, splice studs with eight (8) inches minimum nested laps and attach flanges together with two (2) sheet metal screws in each flange. All screws are to be self-tapping sheet metal screws.
- D. Runners and Studs at Chase Wall: As specified above for "Runners" and "Studs" and as specified herein. Install chase walls with either a single or double row of floor and ceiling runners with metal studs sixteen (16) inches o.c. maximum and positioned vertically in the runners so that the studs are opposite each other in pairs with the flanges pointing in the same direction. Anchor all studs to runner flanges with sheet metal screws through each stud flange and runner flange following requirements of paragraph 3.4, B. Provide cross bracing between the rows of studs by attaching runner channels or studs set full width of chase attached to vertical studs with one self-tapping screw at each end. Space cross bracing not over thirty-six (36) inches o.c. vertically.
- E. Wallboard Installation - Single Layer Application (Screw Attached)
1. Install wallboard with long dimension parallel to framing member and with abutting edge joints over web of framing member. Install wallboard with long dimension perpendicular to framing members above and below openings in drywall extending to second stud at each side of opening. Arrange joints on opposite sides of wall so as to occur on different studs.
 2. Fasten boards securely to metal studs with screws as specified. Where a free end occurs between studs, provide back blocking. Center abutting ends over studs. Correct work as necessary so that faces of boards are flush, smooth, true.
 3. Apply wallboard screws with an electric screw gun. Drive screws not less than 3/8" from ends or edges of board to provide uniform dimple not over 1/32" deep. Space screws twelve (12) inches o.c. in the field of the board and 8" o.c. staggered along the abutting edges.
 4. All ends and edges of wallboard must occur over screwing members (studs or furring channels). Bring boards into contact but do not be forced into place. Stagger ends or edges where they abut. Arrange joints on opposite sides of a partition so they occur on different studs.
 5. At locations where piping receptacles, conduit, switches, etc., penetrate drywall partitions, provide non-drying sealant and an approved sealant stop at cut board locations inside partition.
- F. Wallboard Installation - Double-Layer Application
1. General: See drawings for wallboard partition types required.
 2. First Layer (Screw Attached): Install as described above for single layer application.
 3. Second Layer (Screw Attached): Screw attach second layer, unless laminating method of attachment indicated on drawings or necessary to obtain required sound rating or fire rating. Install wallboard



vertically with vertical joints offset thirty-two (32) inches from first layer joints and staggered on opposite sides of wall. Attach wallboard with 1-5/8" screws sixteen (16) inches o.c. along vertical joints and sixteen (16) inches o.c. in the field of the wallboard. Screw through first layer into metal framing members.

4. **Second Layer (Laminated):** Install wallboard vertically. Stagger joints of second layer from first layer joints. Laminate second layer with specified laminating adhesive in beads or strips running continuously from floor to ceiling in accordance with manufacturer's instructions. After laminating, screw wallboard to framing members with 1-5/8" screws, spaced twelve (12) inches o.c. around perimeter of wallboard.
- G. **Wallboard Installation - Laminated Application:** Where laminated wallboard is indicated, use specified laminating adhesive, install wallboard vertically and retain tolerances as specified for screw attached wallboard.
- H. **Insulation Installation:** Install where indicated on drawings. Place blanket tightly between studs.
- I. **Deflection of Structure Above:** To allow for possible deflection of structure above partitions, provide top runners for non-rated partitions with 1-1/4" minimum flanges and do not screw studs or drywall to top runner. Where positive anchorage of studs to top runner is required, anchorage device must be by means of slotted hole (in clip connection with screw attachment to web of steel through bushings located in slots of clips), or other anchorage device approved by the Commissioner.
- J. **Control Joints**
 1. Leave a 1/2" continuous opening between gypsum boards for insertion of surface mounted joint.
 2. Back by double framing members.
 3. Attach control joint to face layer with 9/16" galvanized staples six (6) inches o.c. at both flanges along entire length of joint.
 4. Provide two (2) inch wide gypsum panel strip or other adequate seal behind control joint in fire rated partitions and partitions with safing insulation.

3.5 DRYWALL FASCIAS AND CEILINGS

- A. Furnish and install inserts, hanger clips and similar devices in coordination with other work.
- B. Secure hangers to inserts and clips. Clamp or bolt hangers to main runners.
- C. Space main runners 4'-0" o.c. and space hangers 4'-0" o.c. along runners, except as otherwise shown.
- D. Level main runners to a tolerance of 1/4" in 12'-0", measured both lengthwise on each runner and transversely between parallel runners.
- E. **Metal Furring Channels:** Space sixteen (16) inches o.c. maximum. Attach to 1-1/2" main runner channels with furring channel clips (on alternate sides of main runner channels). Furring channels must not be let into or come in contact with abutting masonry walls. Provide end splices by nesting furring channels no less than eight (8) inches and securely wire tying. At any openings that interrupt the furring channels, install additional cross reinforcing to restore lateral stability.



- F. Mechanical accessories, hangers, splices, runner channels and other members used in suspension system must be of metal, zinc coated, or coated with rust inhibitive paint, of suitable design and of adequate strength to support units securely without sagging, and such as to bring unit faces to finished indicated lines and levels.
 - 1. Provide special furring where ducts are over two (2) feet wide.
- G. Apply board with its long dimension at right angles to channels. Locate board butt joints over center of furring channels. Attach board with one (1) inch self-drilling drywall screws twelve (12) inches o.c. in field of board at each furring channel; eight (8) inches o.c. at butt joints located not less than 3/8" from edges.

3.6 ERECTION AT COLUMN ENCLOSURES

- A. Provide metal furring supports. Cut to lengths as necessary for tight fit such that spacing is not more than sixteen (16) inches o.c.
- B. Fasten board securely to supports with screws as specified. Place boards in position with minimum amount of joints. Where free ends occur between supports, provide back-blocking or furring. Center abutting ends over supports. Correct work as necessary so that faces of boards are flush, smooth and true. Provide clips or cross furring for attachment as required.
- C. All layers must be screw attached to furring.

3.7 FINISHING

- A. Taping: Apply a thin, uniform layer of compound to all joints and angles to be reinforced. Apply reinforcing tape immediately, centered over the joint, seated into the compound. A skim coat must follow immediately, but will not function as a fill or second coat. Tape must be properly folded and embedded in all angles to provide a true angle.
- B. Filling: After initial coat of compound has hardened, apply additional compound, filling the board taper flush with the surface. The fill coat must cover the tape and feather out slightly beyond the tape. On joints with no taper, the fill coat must cover the tape and feather out at least four (4) inches on either side of the tape. No fill coat is necessary on interior angles.
- C. After compound has hardened, spread a finishing coat of compound evenly over and extending slightly beyond the fill coat on all joints and feathered to a smooth, uniform finish. Over tapered edges, the finished joint must not protrude beyond the plane of the surface. All taped angles must receive a finish coat to cover the tape and taping compound, and provide a true angle. Where necessary, sand between coats and following the final application of compound to provide a smooth surface, ready for painting.
- D. Fastener Depressions: Apply compound to all fastener depressions followed, when hardened by at least two (2) coats of compound, leaving all depressions level with the plane of the surface.
- E. Finishing Beads and Trim: Apply compound to all bead and trim and feather out from the ground to the plane of the surface. When hardened, follow this with two (2) coats of compound each extending slightly beyond the previous coat. Feather the finish coat from the ground to the plane of the surface and sand as necessary to provide a flat, smooth surface ready for decoration.



- F. Except as otherwise noted, level of finish for surface exposed to view must conform to Level 4 of ASTM C 840 and GA-214 of the Gypsum Association.

END OF SECTION 09 21 16



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 09 30 00 - TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Wall tile and base.
 - 2. Setting beds, grout, sealant and waterproofing membrane.
- B. Related Sections
 - 1. Section 05 70 00 "Decorative Metals" for brass trim for tile.
 - 2. Section 09 21 16 "Gypsum Board Assemblies"

1.3 REFERENCES

- A. ANSI A108 Series/A118 Series - American National Standards for Installation of Ceramic Tile.
- B. ANSI A136.1 - American National Standards for Organic Adhesives for Installation of Ceramic Tile.
- C. ASTM C144 - Standard Specification for Aggregate for Masonry Mortar.
- D. ASTM C150 - Standard Specification for Portland Cement.
- E. TCNA - Handbook for Ceramic, Glass and Stone Tile Installation; Tile Council of North America.
- F. ISO 13007 - International Standards Organization; Classification for Grout and Adhesives.

1.4 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Samples
 - 1. Submit sample panels, approximately 12" x 12", mounted on hardboard back-up with selected grout color for each color and pattern of tile and grout specified.
 - 2. Submit 12" x 12" samples of waterproofing membrane.
- C. Master Grade Certificates: Prior to opening tile containers, submit to the Commissioner a Master Grade Certificate, signed by an officer of the firm manufacturing the tile used, and issued when the shipment is made, stating the grade, kind of tile, identification marks for tile containers, and the name and location of the project.



D. Mock-Ups

1. At an area on the site where approved by the Commissioner, provide a mock-up tile installation.
 - a. Make the mock-up approximately 36" x 36" in dimension.
 - b. Provide one mock-up for each type, class, and color of installation required under this Section.
 - c. The mock-ups may be used as part of the Work, and may be included in the finished Work when so approved by the Commissioner.
 - d. Revise as necessary to secure the Commissioner's approval.
2. The mock-ups, when approved by the Commissioner, will be used as datum for comparison with the remainder of the work of this Section for the purposes of acceptance or rejection.
3. If the mock-up panels are not permitted to be part of the finished Work, completely demolish and remove them from the job site upon completion and acceptance of the work of this Section.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Qualifications of Installers: For cutting, installing and grouting of tile, use experienced tile setters who are completely familiar with the requirements of this work and the recommendations contained in the referenced standards.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Manufacture all tile in accordance with Standard Grade Requirements of ANSI A-137.1.
- B. Install all tile in accordance with the recommendations contained in "Tile Council of North America Handbook for Ceramic, Glass, and Stone Tile Installation (TCNA)," latest edition.

2.2 TILE

- A. Wall Tile: See Finish Schedule.
 1. Sole Source Product: CEDIT; Matrice, Trama 2, DO - Sostanza.
 - a. No Substitutions Permitted.
- B. Printed Tile
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Imagine Tile; product as indicated on Drawings or comparable product by one of the following:
 - a. Tile Artisans
 - b. Daltile
 - c. Or approved equal.



2.3 TRIM AND SPECIAL SHAPES

- A. Provide external and internal corners, trim shapes at openings, and all other trim and special shapes to match the tile specified herein, as required by field conditions and drawing details.

2.4 SETTING BEDS AND GROUT

- A. Portland Cement: ASTM C150, Type 1.
- B. Hydrated Lime: ASTM C207, Type S.
- C. Sand: ASTM C144, clean and graded natural sand.
- D. Latex Admixture for Mortar Bed
 - 1. Product: Subject to compliance with requirements, provide one of the following:
 - a. MAPEI; Planicrete AC, blended with a 3:1 site mix
 - b. Laticrete; 333
 - c. Pro Spec; Acrylic Additive
 - d. Custom Building Products; Custom Crete Thin Set Additive
 - e. Or approved equal.
- E. Latex-Portland Cement Bond Coat, complying with ANSI A118.4 and ISO 13007, C2ES2P2 with minimum compressive strength of 400 psi.
 - 1. Product: Subject to compliance with requirements, provide one of the following:
 - a. MAPEI; Keralastic System thin set mortar, consisting of Kerabond dry-set mortar and Keralastic latex admixture
 - b. Laticrete; 211 dry-set mortar and 4237 latex admixture.
 - c. Pro Spec; Permalastic System consisting of Permalastic Dryset Mortar and Permalastic Admixture
 - d. Custom Building Products; Pro-Lite
 - e. Or approved equal.
- F. Wall and Base Tile
 - 1. Over drywall, use ANSI A136.1-1967 Organic Adhesive for installation of Ceramic Tile, Type I and ISO 13007 D2TE. Shear strength is to be 50 psi minimum. Adhesive primer as recommended by adhesive manufacturer. Manufacturer must certify, in writing, that adhesive and primer used are proper types for the intended tile types and application. Conform to TCA Detail W-242.
 - a. Product: Subject to compliance with requirements, provide one of the following:
 - 1). MAPEI; Type 1 Mastic.
 - 2). Laticrete; Type 1 Adhesive.
 - 3). ProSpec; B-1000 Tile Adhesive.
 - 4). Custom Building Products; Reliabond Adhesive Type 1.
 - 5). Or approved equal.



2. Over cement board, use a Latex Portland cement mortar bond coat, conforming to ANSI A118.4, ISO 13007-C2ES2P2, and TCA Detail W-244; coat back of board with waterproof membrane as specified below.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI; Kerabond/Keralastic System or comparable product by one of the following:
 - 1). Laticrete
 - 2). Pro Spec
 - 3). Custom Building Products
 - 4). Or approved equal.
 3. Over glass mat water resistant gypsum backer board, use a Latex Portland cement mortar bond coat, conforming to ANSI A118.4, ISO 13007-C2ES2P2, and TCA Detail W-245.
 - a. Basis-of-Design Product: Subject to compliance with requirements, provide MAPEI; Kerabond/Keralastic System or comparable product by one of the following:
 - 1). Laticrete
 - 2). Pro Spec
 - 3). Custom Building Products
 - 4). Or approved equal.
- G. Waterproofing Membrane: Complying with ANSI A118.10 and ANSI A118.12.
1. Reinforce membrane with polyester fabric.
 2. Run waterproofing up full height of walls.
 3. Product: Subject to compliance with requirements, provide one of the following:
 - a. Mapei; Mapelastic 400 with factory blended Bio-Block antimicrobial protection
 - b. Laticrete; Laticrete 9235 with Microban
 - c. ProSpec; B6000
 - d. Custom Building Products; 9240
 - e. Or approved equal.
- H. Water: Clean, fresh and suitable for drinking.
- I. Water-Cleanable Epoxy Grout: ANSI A118.3.
1. Product: Subject to compliance with requirements, provide one of the following:
 - a. Laticrete; Spectralock Pro.
 - b. Mapei; Kerapoxy.
 - c. Custom Building Products; Ceg-Lite.
 - d. ProSpec; B7000.
 - e. Or approved equal.
 2. Color: As selected by Commissioner.



3. Product for use with Porcelain Tile (T-2):
 - a. Water-Cleanable Epoxy Grout: ANSI A118.3
 - 1). High performance epoxy grout meeting performance requirements of ANSI A118.3.
 - 2). Equipped with anti-microbial protection.
 - b. Applicable Standard: ANSI A118.3 tested with 1244 Bright White
 - 1). Physical Properties
 - (a). ANSI A118.3 E5.1, Water Cleanability: Water Cleanable at 80 minutes
 - (b). ANSI A118.3 E5.2, Initial Set Service Strength: > 2 hours < 24 hours
 - (c). ANSI A118.3 E5.3, Shrinkage: < 0.25%
 - (d). ANSI A118.3 E5.4, Vertical Joint Sag: Pass
 - (e). ANSI A118.3 E5.5, Quarry/Quarry Bond Strength: 1,000 psi (tile failure) 6.9 MPa
 - (f). ANSI A118.3 E5.6, Compressive Strength: 3,500 psi (7 days) 24 MPa
 - (g). ANSI A118.3 E5.7, Tensile Strength: 1,100 psi (7 days) 7.6 MPa
 - (h). ANSI A118.3 E5.8, Thermal Shock: 510 psi 3.5 MPa
 - c. Color: Gold.
4. Product for use with Structural Glazed Tile (T-6 and T-8):
 - a. Water-Cleanable Epoxy Grout: ANSI A118.3
 - 1). High performance epoxy grout meeting performance requirements of ANSI A118.3.
 - 2). Equipped with anti-microbial protection.
 - b. Applicable Standard: ANSI A118.3 tested with 1244 Bright White
 - 1). Physical Properties
 - (a). ANSI A118.3 E5.1, Water Cleanability: Water Cleanable at 80 minutes
 - (b). ANSI A118.3 E5.2, Initial Set Service Strength: > 2 hours < 24 hours
 - (c). ANSI A118.3 E5.3, Shrinkage: < 0.25%
 - (d). ANSI A118.3 E5.4, Vertical Joint Sag: Pass
 - (e). ANSI A118.3 E5.5, Quarry/Quarry Bond Strength: 1,000 psi (tile failure) 6.9 MPa
 - (f). ANSI A118.3 E5.6, Compressive Strength: 3,500 psi (7 days) 24 MPa
 - (g). ANSI A118.3 E5.7, Tensile Strength: 1,100 psi (7 days) 7.6 MPa
 - (h). ANSI A118.3 E5.8, Thermal Shock: 510 psi 3.5 MPa
 - c. Color: #53 Twilight Blue.
- J. Physical Properties: The setting beds and grouts must meet the following physical requirements:
 1. Compressive Strength: 3000 psi min.
 2. Shear Bond Strength: 500 psi min.
 3. Water Absorption: 4.0% max.
 4. Service Rating (ASTM C627): Extra Heavy Duty.
- K. Sealer: Manufacturer's standard product for sealing grout joints and that does not change color or appearance of grout



1. Basis-of-Design Product: Subject to compliance with requirements, provide Aqua Mix Inc.; Sealer's Choice 15 Gold or comparable product by one of the following:
 - a. DuPont
 - b. 3M
 - c. Or approved equal.

L. Temporary Protective Coating: Either product indicated below that is applied in the tile manufacturer's factory and formulated to protect exposed surfaces of tile against adherence of mortar and grout; compatible with tile, mortar, and grout products; and easily removable after grouting is completed without damaging grout or tile.

1. Petroleum paraffin wax, applied hot, fully refined and odorless, containing at least 0.5 percent oil with a melting point of 120 to 140 deg. F. per ASTM D87.
2. Grout release in form of manufacturer's standard proprietary liquid coating that is specially formulated and recommended for use as temporary protective coating for tile.

M. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

2.5 SEALANT

- A. Joint Backing: Preformed, compressible, resilient, non-extruding, non-staining strips of foam neoprene, foam polyethylene, or other material recommended by sealant manufacturer.
- B. Bond Breaker: Polyethylene tape, 3 mils thick, or other material recommended by sealant manufacturer.
- C. Sealant Primer: Colorless, non-staining, or type to suit substrate surface, as recommended by sealant manufacturer.
- D. Sealant: One-part silicone based sanitary sealant, conforming to ASTM C920, Type S, Grade NS, Class 25. Sealant hardness upon full cure is to be between 20-30 Shore "A" Durometer. Color of sealant to blend with or match adjacent materials, and as selected by the Commissioner.

1. Product: Subject to compliance with requirements, provide one of the following:
 - a. GE Construction Sealants; Sanitary SCS1700
 - b. Dow Corning Corporation; 786-M White
 - c. May National Associates, Inc. A Subsidiary of Sika Corporation U.S.; Bondaflex Sil 100 WF
 - d. Or approved equal.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.



3.2 PREPARATION

- A. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved samples. If not factory blended, either return to manufacturer or blend tiles at project site before installing.
- B. Field Applied Temporary Protective Coating: Pre-coat tile with continuous film of temporary protective coating, taking care not to coat unexposed tile surfaces.

3.3 JOINTS IN TILE WORK

- A. Joint Widths: 1/16"
- B. Alignment: Align wall, base and floor joints through the field and trim. Direction and location of all joints as directed by Commissioner.
- C. Movement Joints: Conform to TCA Detail EJ171. Locate where movement joints are in back-up material. Provide movement joint at joints between mop receptors and tile. Provide movement joint at all vertical internal joints of wall tile. Movement joints 1/8" wide in tile. Fill all movement joints with specified backing and sealant. Use bond breaker where sufficient space for joint backing does not exist.
 - 1. Provide sealant between tile and plumbing fixtures, mirrors, pipes, countertops and other dissimilar materials penetrating or adjacent to tile.

3.4 INSTALLATION

- A. Comply with the following installation standards:
 - 1. Wall tile over drywall using organic adhesive - ANSI A136.1 and ISO 13007, D2TE.
 - 2. Wall tile over cement board or glass mat backer board using dry set mortar with latex additive - ANSI A118.4 and ISO 13007, C2ES2P2.
- B. All setting beds and/or adhesives must provide for an average contact area of not less than 95% coverage.
- C. Allowable Variations in Finished Work: Do not exceed the following deviations from level and plumb, and from elevations, locations, slopes and alignment shown.
 - 1. Walls: 1/8" in 8'-0" run, any direction; 1/8" at any location; offset at any location, 1/32".
 - 2. Joints: +/- 1/32" joint width variation of any location; 1/16" in 3'-0" run deviation from plumb and true.
- D. Waterproofing Membrane: Install the membrane in strict accordance with manufacturer's written recommendations.
- E. Handle, store, mix and apply setting and grouting materials in compliance with the manufacturer's instructions.
- F. Terminate work neatly at obstructions, edges and corners without disruption of pattern or joint alignment.



- G. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight, aligned joints. Fit tile closely to electrical outlets, piping and fixtures so that plates, collars, or covers overlap tile.
- H. Lay tile in pattern as indicated on Drawings. Provide uniform joint widths.

3.5 CLEANING AND PROTECTION OF TILE

- A. Cleaning: On completion of placement and grouting, clean all tile surfaces so they are free of foreign matter.
 - 1. Remove grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use cleaners only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning to ensure removal of all cleaning material.
 - 3. Remove temporary protective coating by method recommended by coating manufacturer and that is acceptable to tile and grout manufacturer. Trap and remove coating to prevent drain clogging.
- B. Protect installed tile work with Kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. Apply coat of sealer to all grout joints and all unglazed tile.

END OF SECTION 09 30 00



SECTION 09 57 53 - SECURITY CEILING ASSEMBLIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes security ceiling system.

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. For actual installation of the work of this Section, use only personnel who are thoroughly familiar with the manufacturer's recommended methods of installation and experienced in the skills required.

PART 2 - PRODUCTS

2.1 SECURITY CEILING SYSTEM

- A. Ceiling Panels
 1. Surface Texture: Smooth
 2. Composition: Electrogalvanized Steel – 12 gauge galvanized steel with post production powder coated paint finish
 3. Color: White
 4. Size: 12 inches wide, length as indicated on Drawings.
 5. Perforation Options: Perforated
 6. Edge Profile: Screw In Concealed Locking (tested to withstand 3100 lbs of force)
 7. Noise Reduction Coefficient (NRC): ASTM C423; 0.80
 8. Flame Spread: ASTM E1264; Class A (FM)
 9. Light Reflectance (LR): ASTM E1477; White Panel: Light Reflectance: Perforated – 0.61
 10. Dimensional Stability: Standard



- B. Accessories
 - 1. Fiberglass infill: Manufacturer's standard.
- C. Suspension System
 - 1. Edge Moldings: Metal or stainless steel of types and profiles indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations, including light fixtures, that fit type of edge detail and suspension system indicated.
 - 2. Accessories
 - a. Hold Down Clips: Manufacturer's standard.
 - b. C Channel: 14 gauge, Manufacturer's standard.
 - c. Midspan Strut: Manufacturer's standard.
 - d. Z Clips; 14 gauge, Manufacturer's standard.
- D. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong Work Industries; Metalworks SecureLock Plus or comparable product by one of the following:
 - 1. Gordon Corrections Division
 - 2. Steel Ceilings, Inc.
 - 3. Or approved equal.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install the ceiling system in accordance with ASTM C 636, and CISCA guidelines, in layouts as reflected on the approved shop drawings, all in compliance with the manufacturer's installation instructions.
- B. Install wall moldings at intersection of suspended ceiling and vertical surfaces. Miter corners where wall moldings intersect or install corner caps.

END OF SECTION 09 57 53



SECTION 09 66 23 - RESINOUS MATRIX TERRAZZO FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Thin set epoxy terrazzo flooring.
 - 2. Precast terrazzo base.
 - 3. Divider strips, expansion strips, and accessory strips.

- B. Related Sections

- 1. Section 09 21 16 "Gypsum Board Assemblies "

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: Submit manufacturer's technical information and installation instructions for each type of terrazzo, accessory item, and material required.
- C. Certifications
 - 1. Submit supplier's/manufacturer's written certification that terrazzo materials meet or exceed specified NTMA properties.
 - 2. Submit supplier's/manufacturer's written certification that the concrete substrates have been tested and that the moisture vapor transmission rate does not exceed the supplier's/manufacturer's recommendations. All tests must be performed according to ASTM F 1869 "Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride Moisture Emissions Test," or ASTM F 2170 "Standard Test Method for Determining Relative Humidity on Concrete Floor Slabs Using In-Situ Probes," or ASTM F 710 "Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring (Tramex Meter)."
 - a. If moisture vapor transmission levels exceed the manufacturer's recommended levels, submit the terrazzo manufacturer's recommended remediation method for the Commissioner's approval.
 - 3. Submit manufacturer's written certification that the terrazzo installer is an authorized installer of the manufacturer's epoxy terrazzo system.
- D. Shop Drawings: Submit shop drawings showing layout of divider strips, control joint strips, abrasive strips and base and border strips.



- E. Samples: Submit twelve (12) inch square samples of each pattern, color and type of terrazzo required, together with minimum twelve (12) inch long samples of each type of accessory item. Submit full set of sample colors for abrasive strips, and, once color is selected, 12" sample of the strip in selected color.
- F. Maintenance Instructions: Submit two (2) copies of written instructions for recommended periodic maintenance of terrazzo.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Installer Qualifications: An entity meeting the requirements of DDC General Conditions Section 014000 1.7/C/1 and that employs installers and supervisors who are instructed and approved by manufacturer.
- C. Comply with applicable specifications and recommendations of the National Terrazzo and Mosaic Association, Inc. (NTMA).

1.5 MOCK-UP

- A. Construct 100 sq. ft. mock-up of terrazzo floor and base for Commissioner's approval. Do not proceed with any other terrazzo work until mock-up is adjusted and approved by the Commissioner. Approved mock-up may be incorporated into final work and will become the standard to which all other terrazzo work must conform. Rejected mock-up must be removed completely and the substrate returned to its original condition.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Manufacturer/System

1. The Epoxy Thin-Set Terrazzo Flooring System, including precast base, includes a primer coat; 100% solids epoxy terrazzo matrix binder mixed with marble fines and #0, #1, and #1 marble chips salvaged from existing partitions; 100% solids epoxy terrazzo matrix grout coat; and maintenance sealer. Provide 3/8" nominal total system thickness.
2. Basis-of-Design Product: Subject to compliance with requirements, provide Master Terrazzo; Thin-Set Epoxy Terrazzo, MT-1190 (black) for hallway, and MT-8385 (white) inside bathroom, or comparable product by one of the following:
 - 1). Sika Flooring
 - 2). General Polymers
 - 3). Key Resins
 - 4). Or approved equal.
3. Apply Epoxy Thin-Set Terrazzo Flooring System over 40 mils thick Flexible Epoxy Membrane as manufactured by epoxy terrazzo resin manufacturer on all concrete floors to receive epoxy terrazzo as shown on drawings.

B. Epoxy Thin-Set Terrazzo Typical Physical Properties at 73 deg. F.



1. Fungus and Bacteria Resistance, MIL-F-5250, Sec. 4.4.2.11	Will not support the growth of fungus or bacteria when subjected to mildew and bacteria tests specified in TT-P-34.
2. Impact Resistance, Sec. 4.7.3	Withstands 16 ft. lbs. without cracking, delamination or chipping.
3. Indentation, MIL-D3134F, Sec. 4.7.4	Withstands 2,000 psi for 30 min. without indentation.
4. Resistance to Elevated Temperature, MIL-D-3134F, Sec. 4.7.5	No slip or flow at required temperature of 158 deg. F.
5. Abrasion Resistance, ASTM D 4060, CS-17 Wheel	0.1 grams lost
6. Water Absorption, ASTM D 570-98	10% max. (24 hr. immersion)
7. Bond Strength to Concrete, 7 days	350 psi (100% concrete failure)
8. Water Immersion, ACI Comm. #403, Bulletin 59-43	
9. Flammability, ASTM D 635	Self-extinguishing
10. Critical Radiant Flux, ASTM E 648	0.95 W/cm ²
11. Compressive Strength, psi, ASTM D 695	10,000 min.
12. Tensile Strength, psi, ASTM C 307	2,500
13. Flexural Strength, psi, ASTM C 580	3,000 min
14. Thermal Coefficient of Expansion, ASTM C 531	20 x 10 ⁻⁶ in/in/deg. F.
C. Terrazzo Membrane Typical Physical Properties at 73 deg. F.	
1. Adhesion, psi, ACI 503R	350 (100% concrete failure)
2. Hardness, Shore D, ASTM D 2240	23
3. Tensile Strength, psi, ASTM D 412	1050
4. Elongation, ASTM D 412	125%.
5. Thermal Cycling, ASTM C 884	No cracking (24 hr., -21 deg. C. to 225 deg. C.)
6. Flammability, ASTM D 635	Self-extinguishing over concrete



7. Heat Aging, Exposure to 140 deg F for:
2 days No change in elongation
30 days No change in elongation
8. Primary Glass Transition, deg. F 70 to 80
9. Lower Glass Transition, deg. F -13 to -22
10. VOC Zero
11. The epoxy elastomer must be free of solvent, external plasticizers, coal tar, known carcinogens, rubber compounds or nitrile butadienes.

D. Accessory Materials

1. Divider Strips: Depth and style as required for type and thickness of terrazzo.
 - a. Provide exposed top in widths as indicated on drawings unless otherwise indicated. Comply with NTMA recommendations.
 - b. Material: Brass per NTMA standards.
 - c. Space strips in patterns shown on drawings.
 - d. Divider strip adhesive: Mixture of fine sand and bonding agent, specially compounded by manufacturer for this use.
2. Control or Expansion Strips: Double or split units, 1/8" wide, of same materials and color as the divider strips. Provide epoxy terrazzo manufacturer's recommended flexible joint filler in color to match terrazzo formulation.
3. Accessory Strips: Match width, material and color of divider strips. Provide the following accessory strips as required for a complete installation:
 - a. Base beads.
 - b. Cove base dividers.
4. Cleaner: As recommended by terrazzo flooring manufacturer.
5. Sealer: Colorless, slip- and stain-resistant, non-yellowing, penetrating sealer as recommended by terrazzo flooring manufacturer that will not disturb the color or physical properties of the terrazzo surface.
6. Leveling Compound: Epoxy base material as recommended by terrazzo flooring manufacturer, applied over properly prepared substrate.
7. Fill: Epoxy base mortar as recommended by terrazzo flooring manufacturer.

2.2 MIXES

- A. Matrix color and chip size to match approved samples.
- B. Marble Chips: Sound crushed marble chips salvaged from existing partitions.
 1. Size to conform to NTMA gradation standards.
 2. Hardness to conform to ASTM C 241, Ha-10 minimum.
 3. 24-hour absorption rate not to exceed 0.75%.



4. Chips must contain no deleterious or foreign matter.
5. Dust content less than 1% by weight.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PREPARATION

- A. Clean substrates of substances, including oil, grease, and curing compounds, that might impair terrazzo bond. Provide clean, dry, and neutral substrate for terrazzo application.
- B. Concrete Slabs: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with terrazzo.
 1. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
 2. Restore damaged and deteriorated concrete according to terrazzo manufacturer's written recommendations.
 3. Use patching and fill material to fill holes and depressions in substrates according to terrazzo manufacturer's written instructions.
- C. Verify that concrete substrates are dry and moisture-vapor emissions are within acceptable levels according to manufacturer's written instructions.
 1. Moisture Testing: Perform tests indicated below.
 - a. Calcium Chloride Test: Perform anhydrous calcium chloride test per ASTM F 1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb. of water/1000 sq. ft. in 24 hours.
 - 1). Perform tests so that each test area does not exceed 200 sq. ft. and perform not less than two tests in each installation area and with test areas evenly spaced in installation areas.
 - b. In-Situ Probe Test: Perform relative-humidity test using in-situ probes per ASTM F 2170. Proceed with installation only after substrates have a maximum 75 percent relative-humidity-level measurement.
 - c. Test Method: Test for moisture content following ASTM F 1869. Proceed with installation only after substrates have a moisture - vapor emission rate of 3 lbs. of water/1000 sq. ft. in 24 hours. Proceed with installation only after substrates pass testing.
 - D. Protect other work from water and dust generated by grinding operations. Control water and dust to comply with environmental protection regulations.
 1. Erect and maintain temporary enclosures and other suitable methods to limit water damage and dust migration and to ensure adequate ambient temperatures and ventilation conditions during installation.

3.3 INSTALLATION

- A. General



1. Comply with NTMA specifications and manufacturer's recommendations for preparation of substrate, installation of metal strips, and for placing, grinding, grouting and finishing.
 2. Complete terrazzo installation before the application of other items that might be damaged by this work.
- B. Expansion Joints: Where expansion joints are shown, install two (2) divider strips, separated by the joint width shown with removable strips, extending the full depth of the topping and under bed. Do not bridge expansion joints with reinforcement or cross strips.
1. Expansion joints must not exceed 30'-0" o.c. unless otherwise noted on drawings.
- C. Flooring
1. Perform work only under optimum conditions as recommended by manufacturing firm and NTMA recommendations. Surfaces over which matrix is to be applied must be completely dry and thoroughly clean. Atmospheric and substrate temperature must be sixty (60) degrees F. or above.
 - a. Moisture testing of concrete slab must be performed following terrazzo manufacturer's recommendations. If slab contains moisture above recommended levels of the terrazzo manufacturer, the Contractor must provide a moisture barrier that can reduce the vapor emissions level to acceptable limits. Manufacturer's representative must submit written confirmation to the Commissioner verifying that the concrete slab has been properly prepared to receive epoxy terrazzo.
 2. Apply primer over entire area to receive floor surfacing. Spread uniformly over surfaces using clean rubber squeegee, or clean steel trowels. Do not allow primer to collect in depressions. Porous areas may require double application of primer.
 3. Apply flexible epoxy membrane at 40 mils thick over primer.
 4. Mix and apply terrazzo matrix and chips according to manufacturer's instructions.
 5. Allow surfacing to set undisturbed for minimum period of twelve (12) hours or until surfaces are hard and sure. Maintain temperatures throughout curing time at minimum of fifty (50) degrees F.
 6. Grind using #24-120 grit stone by wet process method utilizing standard terrazzo grinding equipment. Dry grinding using diamond stones is acceptable for rough grind only. Use vacuums adequate to control grinding dust. Finish grind with #120 grit stone or finer as specified.
 7. Grout as required using resin as recommended by the manufacturer. Apply grout according to manufacturer's instructions. After curing for a minimum of twelve (12) hours, grind using #120 grit stone using same method and equipment as used for initial grinding operation.
 8. After completion of grinding operation, clean floor of all dirt and abrasive particles by washing with a neutral cleaner and mopping down and rinsing with clean water. When floor is perfectly clean and dry, treat surfaces with terrazzo sealer. Do not apply waxes.
 9. Provide finished surfaces approximately 3/8" thick, true to plane and line, and conforming to the tolerances specified for the concrete substrate.
 10. Coordinate location and proper setting of all items to be installed in floor (i.e. drains, electrical outlets, door closers, etc.).
 11. Install terrazzo at floor closer pans as required to match adjacent floor. Grind and seal to align with adjacent floor.



3.4 CLEANING AND SEALING

- A. Clean and seal terrazzo in accordance with the instructions of the terrazzo sealer manufacturer after installation and finishing operations are completed.

END OF SECTION 09 66 23



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 09 90 00 - PAINTING AND COATING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:

1. Prime painting unprimed surfaces to be painted under this Section.
2. Painting all items furnished with a prime coat of paint, including touching up of or restoring of abraded, damaged or rusted prime coats.
3. Painting all ferrous metal (except stainless steel) exposed to view.
4. Painting all galvanized ferrous metals exposed to view.
5. Painting gypsum drywall exposed to view.
6. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
7. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers, lighting fixtures, and the like, which are exposed to view through these items.
8. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
9. Painting of any surface not specifically mentioned to be painted herein or on drawings, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

- B. Related Sections

1. Section 09 21 16 "Gypsum Board Assemblies"
2. Shop priming is required on some, but not all of the items scheduled to be field painted. Refer to other Sections of work for complete description.
3. Shop Coat on Machinery and Equipment: Refer to the Sections under which various items of manufactured equipment with factory applied shop prime coats are furnished. All items of equipment furnished with prime coat finish are to be finish painted under this Section.
4. Color Coding of Mechanical Piping and Electrical Conduits
 - a. Section 22 05 53 "Identification for Plumbing Piping and Equipment"
 - b. Section 26 05 53 "Identification for Electrical Systems"
 - c. Color Coding consists of an adhesive tape system and is in addition to painting of piping and conduits under this Section, as specified above.

1.3 MATERIALS AND EQUIPMENT NOT TO BE PAINTED

- A. Factory-finished toilet partitions.
- B. Factory-finished ceiling systems.
- C. Non-ferrous metals, except for items specified and/or indicated to be painted.



- D. Finished hardware, excepting hardware that is factory primed.
- E. Surfaces not to be painted must be left completely free of droppings and accidentally applied materials resulting from the work of this Section.

1.4 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Materials List: Submit a complete list of materials proposed to be furnished and installed under this portion of the work.
- C. Samples
 - 1. Samples for Initial Selection: Accompanying the materials list, submit samples of the full range of colors available in each of the proposed products.
 - 2. Samples for Verification: Submit samples of each of the selected colors and glosses painted onto 8-1/2" x 11" x 1/4" thick material; whenever possible, the material for Samples is to be the same material as that on which the coating will be applied in the work.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Job Mock-Up
 - 1. In addition to the samples specified herein to be submitted for approval, apply in the field, at their final location, each type and color of approved paint materials, applied 10 feet wide, floor to ceiling of wall surfaces, before proceeding with the remainder of the work, for approval by the Commissioner. Paint mock-ups to include door and frame assembly.
 - 2. These applications when approved will establish the quality and workmanship for the work of this Section.
 - 3. Repaint individual areas which are not approved, as determined by the Commissioner, until approval is received. Assume at least two paint mock-ups of each color and gloss for approval.
- C. Qualification of Painters: Use only qualified painters for the mixing and application of paint on exposed surfaces.
- D. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Provide barrier coats over incompatible primers or remove and re-prime as required.

1.6 JOB CONDITIONS

- A. Apply water-based paints only when the temperature of surfaces to be painted and the surrounding air temperatures are between 50 degrees F. and 90 degrees F., unless otherwise permitted by the paint manufacturer's printed instructions.
- B. Apply solvent-thinned paints only when the temperature of surfaces to be painted and the surrounding air temperatures are between 45 degrees F. and 95 degrees F. unless otherwise permitted by the paint manufacturer's printed instructions.



- C. Do not apply paint in snow, rain, fog or mist; or when the relative humidity exceeds eighty-five (85) percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
- D. Painting may be continued during inclement weather only if the areas and surfaces to be painted are enclosed and heated within the temperature limits specified by the paint manufacturer during application and drying periods.

PART 2 - PRODUCTS

2.1 PAINT MANUFACTURERS

- A. Except as otherwise noted, provide the painting products listed for all required painting made by Benjamin Moore (Moore), PPG Paints (PPG), and Sherwin Williams (S-W) or an approved equal. Comply with number of coats and required minimum mil thicknesses as specified herein.

2.2 MATERIALS

- A. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer, and use only to recommended limits.
- B. Colors and Glosses: All colors and glosses are to be as selected by the Commissioner. Certain colors will require paint manufacturer to prepare special factory mixes to match colors selected by the Commissioner. Color schedule (with gloss) will be furnished by the Commissioner.
- C. Coloring Pigment: Products of or furnished by the manufacturer of the paint or enamel approved for the work.
- D. Linseed Oil: Raw or boiled, as required, of approved manufacture, per ASTM D 234 and D 260, respectively.
- E. Turpentine: Pure distilled gum spirits of turpentine, per ASTM D 13.
- F. Shellac: Pure gum shellac (white or orange) cut in pure denatured alcohol using not less than four (4) lbs. of gum per gallon of alcohol.
- G. Driers, Putty, Spackling Compound, Patching Plaster, etc.: Best quality, of approved manufacture.
- H. Heat Resistant Paint: Where required, use heat resistant paint when applying paint to heating lines and equipment.

2.3 GENERAL STANDARDS

- A. Painting materials must bear identifying labels on the containers with the manufacturer's instructions printed thereon.
- B. Paint must not be badly settled, caked or thickened in the container, must be readily dispersed with a paddle to a smooth consistency and must have excellent application properties.
- C. Paint must arrive on the job color-mixed except for tinting of undercoats and possible thinning.



- D. All thinning and tinting materials must be as recommended by the manufacturer for the particular material thinned or tinted.

2.4 SCHEDULE OF FINISHES

A. Interior Ferrous Metal

1. Semi-Gloss Finish/Latex

- a. Primer:
- 1). 1 coat Moore Ultra Spec-HP Acrylic Metal Primer (HP04)
 - 2). 1 coat PPG Devflex 4020 PF DTM Primer/Flat Finish
 - 3). 1 coat S-W Pro-Industrial Pro-Cryl Universal Primer B66-1300 Series
 - 4). or approved equal
- b. First Coat:
- 1). 1 coat Moore Ultra Spec HP DTM Acrylic Semi-Gloss (HP29)
 - 2). 1 coat PPG Pitt Glaze WB1 Pre-Catalyzed Semi-Gloss Epoxy 16-510
 - 3). 1 coat S-W Pro Industrial Acrylic Semi-Gloss, B66-650 Series
 - 4). or approved equal
- c. Second Coat:
- 1). 1 coat Moore Ultra Spec HP DTM Acrylic Semi-Gloss (HP29)
 - 2). 1 coat PPG Pitt Glaze WB1 Pre-Catalyzed Semi-Gloss Epoxy 16-510
 - 3). 1 coat S-W Pro Industrial Acrylic Semi-Gloss, B66-650 Series
 - 4). or approved equal
- d. Total DFT not less than: 4.0 mils

B. Interior Drywall

1. Flat Finish/Vinyl Acrylic Latex

- a. Primer:
- 1). 1 coat Moore Ultra Spec 500 Interior Latex Primer (N534)
 - 2). 1 coat PPG Speedhide Zero Interior Latex Primer 6-4900XI
 - 3). 1 coat S-W ProMar 200 Zero VOC Interior Latex Primer, B28-2600
 - 4). or approved equal
- b. First Coat:
- 1). 1 coat Moore Ultra Spec 500 Latex Flat (N536)
 - 2). 1 coat PPG Speedhide Zero Interior Latex Flat 6-4110XI
 - 3). 1 coat S-W ProMar 200 Zero VOC Interior Latex Flat, B30-12600 Series
 - 4). or approved equal
- c. Second Coat:
- 1). 1 coat Moore Ultra Spec 500 Latex Flat (N536)
 - 2). 1 coat PPG Speedhide Zero Interior Latex Flat 6-4110XI
 - 3). 1 coat S-W ProMar 200 Zero VOC Interior Latex Flat, B30-12600 Series
 - 4). or approved equal
- d. Total DFT not less than: 3.6 mils

2.5 PIPING AND MECHANICAL EQUIPMENT EXPOSED TO VIEW

- A. Paint all exposed piping, conduits, ductwork and mechanical and electrical equipment. Use heat resisting paint when applied to heating lines and equipment. The Contractor is cautioned not to paint or otherwise



disturb moving parts in the mechanical systems. Mask or otherwise protect all parts as required to prevent damage.

- B. Exposed Uncovered Ductwork, Piping, Hangers and Equipment: Latex Enamel Undercoater and one (1) coat Acrylic Latex Flat.
- C. Exposed Covered Piping, Duct Work and Equipment: Primer/Sealer and one (1) coat Acrylic Latex Flat.
- D. Panel Boards, Grilles and Exposed Surfaces of Electrical Equipment: Latex Enamel Undercoater and two (2) coats Latex Semi-Gloss.
- E. Equipment or Apparatus with Factory-Applied Paint: Refinish any damaged surfaces to match original finish. Do not paint over name plates and labels.
- F. All surfaces of insulation and all other work to be painted must be wiped or washed clean before any painting is started.
- G. All conduit, boxes, distribution boxes, light and power panels, hangers, clamps, etc., are included where painting is required.
- H. All items of Mechanical and Electrical trades which are furnished painted under their respective Contracts must be carefully coordinated with the work of this Section so as to leave no doubt as to what items are scheduled to be painted under this Section.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 GENERAL WORKMANSHIP REQUIREMENTS

- A. Application may be by brush or roller. Spray application only upon acceptance from the Commissioner in writing.
- B. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide ample in place protection. Upon completion of each space, carefully replace all removed items by workers skilled in the trades involved.
- C. Remove electrical panel box covers and doors before painting walls. Paint separately and reinstall after all paint is dry.
- D. All materials must be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- E. Provide complete coverage and hide. When color, stain, dirt or undercoats show through final coat of paint, cover the surface by additional coats until the paint film is of uniform finish, color, appearance and coverage.
- F. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.



3.3 PREPARATION OF SURFACES

A. Metal Surfaces

1. **Weld Fluxes:** Remove weld fluxes, splatters, and alkali contaminants from metal surfaces in an approved manner and leave surface ready to receive painting.
2. **Bare Metal:** Thoroughly clean off all foreign matter such as grease, rust, scale and dirt before priming coat is applied. Clean surfaces, where solder flux has been used, with benzene. Clean surfaces by flushing with mineral spirits. For aluminum surfaces, wipe down with an oil free solvent prior to application of any pre-treatment.
 - a. Bare metal to receive high performance coating specified herein must be blast cleaned SSPC SP-6 prior to application if field applied primer; coordinate with steel trades furnishing ferrous metals to receive this coating to ensure that this cleaning method is followed.
3. **Shop Primed Metal:** Clean off foreign matter as specified for "Bare Metal." Prime bare, rusted, abraded and marred surfaces with approved primer after proper cleaning of surfaces. Sandpaper all rough surfaces smooth.
4. **Galvanized Metal:** Prepare surface as per the requirements of ASTM D 6386.
5. **Metal Filler:** Fill dents, cracks, hollow places, open joints and other irregularities in metal work to be painted with an approved metal filler suitable for the purpose and meeting the requirements of the related Section of work; after setting, sand to a smooth, hard finish, flush with adjoining surface.

B. **Gypsum Drywall Surfaces:** Scrape off all projections and splatters, spackles all holes or depressions, including taped and spackled joints, sand smooth. Conform to standards established in Section 09 21 16, Gypsum Board Assemblies.

C. **Testing for Moisture Content:** Test drywall surfaces for moisture content using a reliable electronic moisture meter. Also test latex type fillers for moisture content before application of top coats of paint. Do not apply any paint or sealer to any surface or to latex type filler where the moisture content exceeds seven (7) percent as measured by the electronic moisture meter.

D. **Touch-Up:** Prime paint all patched portions in addition to all other specified coats.

3.4 MATERIALS PREPARATION

A. Mix and prepare painting materials in strict accordance with the manufacturer's directions.

B. Stir all materials before application to produce a mixture of uniform density, and as required during the application of the materials. Do not stir any film which may form on the surface into the material. Remove the film and, if necessary, strain the material before using.

C. Tint each undercoat a lighter shade to facilitate identification of each coat where multiple coats of the same material are to be applied. Tint undercoats to match the color of the finish coat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

3.5 APPLICATION

A. **General:** Apply paint by brush or roller in accordance with the manufacturer's directions. Use brushes best suited for the type of material being applied. Use rollers of carpet, velvet back, or high pile sheep's wool as recommended by the paint manufacturer for material and texture required.



1. The number of coats and paint film thickness required is the same regardless of the application method. Do not apply succeeding coats until the previous coat has completely dried. Sand between each enamel or varnish coat application with fine sandpaper, or rub surfaces with pumice stone where required to produce an even, smooth surface in accordance with the coating manufacturer's directions.
 2. Apply additional coats when undercoats, stains, or other conditions show through the final coat of paint, until the paint film is of uniform finish, color and appearance. Ensure that all surfaces, including edges, corners, crevices, welds, and exposed fasteners receive a film thickness equivalent to that of flat surfaces.
 3. Paint surfaces behind movable equipment and furniture the same as similar exposed surfaces. Paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 - a. "Exposed surfaces" is defined as those areas visible when permanent or built-in fixtures, convactor covers, covers for finned tube radiation, grilles, etc., are in place in areas scheduled to be painted.
 4. Paint interior surfaces of ducts, where visible through registers or grilles, with a flat, non-specular black paint, before final installation of equipment.
 5. Paint the back sides of access panels, removable or hinged covers to match the exposed surfaces.
 6. Sand enamel finish applied to metal with fine sandpaper and then clean between coats to produce an even surface.
- B. Prime Coats: Re-coat primed and sealed walls and ceilings where there is evidence of suction spots or unsealed areas in first coat, to ensure a finish coat with no burn-through or other defects due to insufficient sealing.
- C. Pigmented (Opaque) Finishes: Completely cover to provide an opaque, smooth surface of uniform finish, color, appearance and coverage.
- D. Touching-Up of Factory Finishes: Unless otherwise specified or shown, materials with a factory finish must not be painted at the project site. To touch up, the Contractor must use the factory finished material manufacturer's recommended paint materials to restore abraded, chipped, or otherwise defective surfaces.

END OF SECTION 09 90 00



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 10 21 13 - TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes solid surface toilet partitions.
- B. Related Sections
 - 1. Section 10 28 13 "Toilet Accessories"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Shop Drawings
- C. Samples
 - 1. 12" x 12" samples of each finish.
 - 2. Samples of each type of hardware and fitting item, including related fasteners.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 SOLID SURFACE TOILET PARTITIONS

- A. Board/panel type: High Density Solid Grade laminate (SGL) with decorative face each side.
 - 1. Thickness: 13mm nominal.
 - 2. Edge treatment: All edges radiused and polished (black).
 - 3. Maximum depth: 1921mm maximum recommended from face of back wall or rear ducting.
 - 4. Floor clearance: 50mm.
 - 5. Minimum ceiling clearance: 20mm.
 - 6. Pedestal adjustment: \pm 5mm.
 - 7. Range height: 2065mm from finished floor to top of headrail.



8. Headrail: Satin anodized aluminum profile, 3 part fixing system which allows cubicles to finish 20mm below ceiling height.
9. Hinges: Stainless steel rise and fall patch hinge. Hinges set so doors fall into a closed position.
10. Pedestals: Satin anodized aluminum.
11. Indicator bolt: Satin anodized aluminum flip style indicator bolt with circular face plate and emergency release facility.
12. Lock and keep: Slimline lever operated mortice lock incorporating satin anodized aluminum face plate. Satin anodized aluminum wrap round keep.

B. Fixings:

1. Partition to wall fixing: Satin anodized aluminum u-channel.
2. Pilaster to partition fixing: Satin anodized aluminum u-channel.
3. Pilaster to wall fixing: Satin anodized aluminum l-angle.

C. Color/finish:

1. Doors/pilasters/partitions: As selected by Commissioner from manufacturer's standard colour range.
2. Hardware: Satin anodized aluminum.

2.2 ACCESSORIES

- A. Hardware and Accessories: Manufacturer's standard design, heavy duty operating hardware and accessories, stainless steel.
 1. Include occupancy sensors.
- B. Anchorages and Fasteners: Manufacturer's standard concealed fasteners of high strength steel. Provide pins for through-bolt applications.
- C. Zero sight line construction.
- D. Headrail: Manufacturer's standard.

2.3 HARDWARE

- A. Doors: Unless otherwise indicated, provide 32 inch wide in-swing doors for standard toilet compartments and 36 inch wide out-swing doors with a minimum 32 inch wide clear opening for compartments indicated to be accessible.
- B. Hinges: Manufacturer's standard stainless steel, self closing to hold doors open approximately 15 degrees with emergency quick access feature.
- C. Latch and Keeper: Manufacturer's standard surface-mounted stainless steel latch unit designed for emergency access and with combination rubber-faced door strike. Provide units that comply with



accessibility requirements of the New York City Building Code at compartments indicated to be accessible to people with disabilities.

- D. Door Pull: At out-swinging doors, provide manufacturer's recommended unit that complies with applicable provisions in the USDOJ's 2010 ADA Standards for Accessible Design and ICC A117.1-2009. Provide units on both sides of doors at compartments indicated to be accessible to people with disabilities.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Center toilet compartment doors on water closets unless otherwise indicated.
- B. Retain the following uniform clearances:
 - 1. 1/2" between pilasters and panels.
 - 2. 1/2" between pilasters or panels and finished wall.
 - 3. 1/4" or less between vertical edges of doors and pilasters.
- C. Set pilaster units with anchorages having not less than two (2) inches penetration into structural floor.
- D. Hang doors and adjust so that tops of doors are level with tops of pilasters when doors are in closed position.

END OF SECTION 10 21 13



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 10 28 13 - TOILET ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes:
 - 1. Toilet accessories for public restroom areas.
 - 2. Security toilet accessories for holding pens.
 - 3. Shelves, Janitor Closet
- B. Related Sections
 - 1. Section 09 29 00 "Gypsum Drywall"
 - 2. Section 09 30 13 "Tiling"
 - 3. Section 10 21 13 "Toilet Partitions"

1.3 SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: Submit manufacturer's technical data, catalog cuts and installation instructions for each toilet accessory.
- C. Setting Drawings: Provide setting drawings, templates, instructions, and directions for installation of anchorage devices in other work
- D. Submit schedule of accessories indicating quantity and location of each item.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Accessory Locations: Coordinate accessory locations with other work to avoid interference and to ensure proper operation and servicing of accessory units. Accessories must be installed at heights in compliance with New York City Building Code, version as noted on the drawings.
- C. Products: Unless otherwise noted, provide products of same manufacturer for each type of unit and for units exposed in same areas.



PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Design accessories and fasteners to comply with the following requirements:
 - 1. Grab Bars: Installed units are able to resist 300 lbf concentrated load applied in any direction and at any point.

2.2 MATERIALS

- A. Stainless Steel: AISI Type 302/304, with polished No. 4 finish, 22 gauge minimum, unless otherwise indicated.
- B. Brass: ASTM B 19 flat products; ASTM B 16, rods, shapes, forgings, and flat products with finished edges; or ASTM B 30, castings.
- C. Galvanized Steel Sheet: ASTM A 653, G60.
- D. Chromium Plating: Nickel and chromium electro-deposited on base metal, ASTM B 456, Type SC 2.
- E. Mirrors: ASTM C 1503, mirror glazing quality, clear glass mirrors, nominal 1/4" thick.

2.3 FASTENING DEVICES

- A. Exposed Fasteners: Theft-proof type, chrome plated, or stainless steel; match finishes on which they are being used.
- B. Concealed Fasteners: Galvanized (ASTM A 123) or cadmium plated.
- C. No exposed fastening devices permitted on exposed frames.
- D. For metal stud drywall partitions, provide ten (10) gauge galvanized sheet concealed anchor plates for securing surface mounted accessories.

2.4 FABRICATION

- A. General: Stamped names or labels on exposed faces of toilet accessory units are not permitted. Unobtrusive labels on surfaces not exposed to view are acceptable. Where locks are required for a particular type of toilet accessory, provide same keying throughout project. Furnish two keys for each lock.
- B. Surface-Mounted Toilet Accessories, General: Fabricate units with tight seams and joints, exposed edges rolled. Hang doors or access panels with continuous stainless steel piano hinge. Provide concealed anchorage.
- C. Recessed Toilet Accessories, General: Fabricate units of all welded construction, without mitered corners. Hang doors of access panels with full-length stainless steel piano hinge. Provide anchorage that is fully concealed when unit is closed.

2.5 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:



1. Bobrick Washroom Equipment Co.
2. American Specialties, Inc.
3. Bradley Corp.
4. A & J Washroom Accessories
5. Georgia-Pacific
6. Koala Kare
7. Or approved equal.

2.6 ACCESSORY SCHEDULE

- A. See Equipment Schedule on Drawings.
- B. Soap Dispenser
 1. Top Mount Soap Dispenser
 - a. Sole Source Product: Dolphin; BC633S-2, Satin Chrome.
 - 1). No Substitutions Permitted.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install accessories in accordance with manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.
 1. Remove temporary labels and protective coatings.
- B. Grab Bars: Install to comply with specified structural-performance requirements.

3.3 ADJUSTING AND CLEANING

- A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.
- B. Clean and polish exposed surfaces in accordance with manufacturer's written instructions.

END OF SECTION 10 28 13



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 05 13 - COMMON MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes general requirements for single-phase and polyphase, general-purpose, horizontal, small and medium, squirrel-cage induction motors for use on ac power systems up to 600 V and installed at equipment manufacturer's factory or shipped separately by equipment manufacturer for field installation.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 COORDINATION

- A. Coordinate features of motors, installed units, and accessory devices to be compatible with the following:
 - 1. Motor controllers.
 - 2. Torque, speed, and horsepower requirements of the load.
 - 3. Ratings and characteristics of supply circuit and required control sequence.
 - 4. Ambient and environmental conditions of installation location.

PART 2 - PRODUCTS

2.1 GENERAL MOTOR REQUIREMENTS

- A. Comply with NEMA MG 1 unless otherwise indicated.
- B. Comply with IEEE 841 for severe-duty motors.

2.2 MOTOR CHARACTERISTICS

- A. Duty: Continuous duty at ambient temperature of 40 deg C and at altitude of 3300 feet (1000 m) above sea level.



- B. Capacity and Torque Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, at installed altitude and environment, with indicated operating sequence, and without exceeding nameplate ratings or considering service factor.

2.3 POLYPHASE MOTORS

- A. Description: NEMA MG 1, Design B, medium induction motor.
- B. Efficiency: Energy efficient, as defined in NEMA MG 1.
- C. Service Factor: 1.15.
- D. Multispeed Motors: Variable torque.
 - 1. For motors with 2:1 speed ratio, consequent pole, single winding.
 - 2. For motors with other than 2:1 speed ratio, separate winding for each speed.
- E. Multispeed Motors: Separate winding for each speed.
- F. Rotor: Random-wound, squirrel cage.
- G. Bearings: Re-greasable, shielded, antifriction ball bearings suitable for radial and thrust loading.
- H. Temperature Rise: Match insulation rating.
- I. Insulation: Class F.
- J. Code Letter Designation:
 - 1. Motors 15 HP and Larger: NEMA starting Code F or Code G.
 - 2. Motors Smaller than 15 HP: Manufacturer's standard starting characteristic.
- K. Enclosure Material: Cast iron for motor frame sizes 324T and larger; rolled steel for motor frame sizes smaller than 324T.

2.4 POLYPHASE MOTORS WITH ADDITIONAL REQUIREMENTS

- A. Motors Used with Reduced-Voltage and Multispeed Controllers: Match wiring connection requirements for controller with required motor leads. Provide terminals in motor terminal box, suited to control method.
- B. Motors Used with Variable Frequency Controllers:
 - 1. Windings: Copper magnet wire with moisture-resistant insulation varnish, designed and tested to resist transient spikes, high frequencies, and short time rise pulses produced by pulse-width modulated inverters.
 - 2. Energy- and Premium-Efficient Motors: Class B temperature rise; Class F insulation.



3. Inverter-Duty Motors: Class F temperature rise; Class H insulation.
4. Thermal Protection: Comply with NEMA MG 1 requirements for thermally protected motors.

C. Severe-Duty Motors: Comply with IEEE 841, with 1.15 minimum service factor.

2.5 SINGLE-PHASE MOTORS

A. Motors larger than 1/20 hp will be one of the following, to suit starting torque and requirements of specific motor application:

1. Permanent-split capacitor.
2. Split phase.
3. Capacitor start, inductor run.
4. Capacitor start, capacitor run.

B. Multispeed Motors: Variable-torque, permanent-split-capacitor type.

C. Bearings: Prelubricated, antifriction ball bearings or sleeve bearings suitable for radial and thrust loading.

D. Motors 1/20 HP and Smaller: Shaded-pole type.

E. Thermal Protection: Internal protection to automatically open power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal-protection device will automatically reset when motor temperature returns to normal range.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 220513

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 05 16 - EXPANSION FITTINGS AND LOOPS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Flexible-hose packless expansion joints.
 - 2. Metal-bellows packless expansion joints.
 - 3. Rubber packless expansion joints.
 - 4. Grooved-joint expansion joints.
 - 5. Pipe loops and swing connections.
 - 6. Alignment guides and anchors.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 PERFORMANCE REQUIREMENTS

- A. Compatibility: Products will be suitable for piping service fluids, materials, working pressures, and temperatures.
- B. Capability: Products to absorb 200 percent of maximum axial movement between anchors.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Welding Qualifications: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
 - 2. ASME Boiler and Pressure Vessel Code: Section IX.



1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Engineering Services Submittal: For each anchor and alignment guide indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer licensed in the State of New York responsible for their preparation.
 - 1. Design Calculations: Calculate requirements for thermal expansion of piping systems and for selecting and designing expansion joints, loops, and swing connections.
 - 2. Anchor Details: Detail fabrication of each anchor indicated. Show dimensions and methods of assembly and attachment to building structure.
 - 3. Alignment Guide Details: Detail field assembly and attachment to building structure.
 - 4. Schedule: Indicate type, manufacturer's number, size, material, pressure rating, end connections, and location for each expansion joint.

1.7 INFORMATIONAL SUBMITTALS

- A. Welding certificates.
- B. Product Certificates: For each type of expansion joint, from manufacturer.

1.8 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For expansion joints to include in maintenance manuals.

PART 2 - PRODUCTS

2.1 PACKLESS EXPANSION JOINTS

- A. Flexible-Hose Packless Expansion Joints:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Flex-Hose Co., Inc.
 - b. Flexicraft Industries.
 - c. Flex Pression Ltd.
 - d. Metraflex, Inc.
 - e. Unisource Manufacturing, Inc.
 - f. Or approved equal.
 - 2. Description: Manufactured assembly with inlet and outlet elbow fittings and two flexible-metal-hose legs joined by long-radius, 180-degree return bend or center section of flexible hose.
 - 3. Flexible Hose: Corrugated-metal inner hoses and braided outer sheaths.



4. Expansion Joints for Copper Tubing NPS 2 (DN 50) and Smaller: Copper-alloy fittings with solder-joint end connections.
 - a. Bronze hoses and single-braid bronze sheaths with 450 psig at 70 deg F (3100 kPa at 21 deg C) and 340 psig at 450 deg F (2340 kPa at 232 deg C) ratings.
 5. Expansion Joints for Copper Tubing NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Copper-alloy fittings with threaded end connections.
 - a. Stainless-steel hoses and single-braid, stainless-steel sheaths with 300 psig at 70 deg F (2070 kPa at 21 deg C) and 225 psig at 450 deg F (1550 kPa at 232 deg C) ratings.
 6. Expansion Joints for Steel Piping NPS 2 (DN 50) and Smaller: Stainless-steel fittings with threaded end connections.
 - a. Stainless-steel hoses and single-braid, stainless-steel sheaths with 450 psig at 70 deg F (3100 kPa at 21 deg C) and 325 psig at 600 deg F (2250 kPa at 315 deg C) ratings.
 7. Expansion Joints for Steel Piping NPS 2-1/2 to NPS 6 (DN 65 to DN 150): Stainless-steel fittings with flanged end connections.
 - a. Stainless-steel hoses and single-braid, stainless-steel sheaths with 200 psig at 70 deg F (1380 kPa at 21 deg C) and 145 psig at 600 deg F (1000 kPa at 315 deg C) ratings.
 8. Expansion Joints for Steel Piping NPS 8 to NPS 12 (DN 200 to DN 300): Stainless-steel fittings with flanged end connections.
 - a. Stainless-steel hoses and single-braid, stainless-steel sheaths with 125 psig at 70 deg F (860 kPa at 21 deg C) and 90 psig at 600 deg F (625 kPa at 315 deg C) ratings.
- B. Metal-Bellows Packless Expansion Joints:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Adscos Manufacturing LLC.
 - b. American BOA, Inc.
 - c. Badger Industries, Inc.
 - d. Expansion Joint Systems, Inc.
 - e. Flex-Hose Co., Inc.
 - f. Flexicraft Industries.
 - g. Flex Pression Ltd.
 - h. Flex-Weld, Inc.
 - i. Flo Fab inc.
 - j. Hyspan Precision Products, Inc.
 - k. Metraflex, Inc.
 - l. Proco Products, Inc.
 - m. Senior Flexonics Pathway.
 - n. Tozen Corporation.



- o. Unaflex.
 - p. Unisource Manufacturing, Inc.
 - q. Universal Metal Hose; a subsidiary of Hyspan Precision Products, Inc.
 - r. U.S. Bellows, Inc.
 - s. WahlcoMetroflex.
 - t. Or approved equal.
 2. Standards: ASTM F 1120 and EJMA's "Standards of the Expansion Joint Manufacturers Association, Inc."
 3. Type: Circular, corrugated bellows with external tie rods.
 4. Minimum Pressure Rating: 150 psig (1035 kPa) unless otherwise indicated.
 5. Configuration: Single joint with base class(es) unless otherwise indicated.
 6. Expansion Joints for Copper Tubing: Single or multi-ply phosphor-bronze bellows, copper pipe ends, and brass shrouds.
 - a. End Connections for Copper Tubing NPS 2 (DN 50) and Smaller: Solder joint.
 - b. End Connections for Copper Tubing NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Solder joint.
 - c. End Connections for Copper Tubing NPS 5 (DN 125) and Larger: Flanged.
- C. Rubber Packless Expansion Joints:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Amber/Booth Company, Inc.; a div. of Vibration Isolation Products of Texas, Inc.
 - b. Flex-Hose Co., Inc.
 - c. Flexicraft Industries.
 - d. Flex-Weld, Inc.
 - e. Garlock Sealing Technologies.
 - f. General Rubber Corporation.
 - g. Mason Industries, Inc.; Mercer Rubber Co.
 - h. Metraflex, Inc.
 - i. Proco Products, Inc.
 - j. Red Valve Company, Inc.
 - k. Tozen Corporation.
 - l. Unaflex.
 - m. Unisource Manufacturing, Inc.
 - n. Or approved equal.
 2. Standards: ASTM F 1123 and FSA's "Technical Handbook: Non-Metallic Expansion Joints and Flexible Pipe Connectors."
 3. Material: Fabric-reinforced rubber complying with FSA-NMEJ-703.
 4. Arch Type: Single arches with external control rods.



5. Spherical Type: Single spheres with external control rods.
6. Minimum Pressure Rating for NPS 1-1/2 to NPS 4 (DN 40 to DN 100): 150 psig (1035 kPa) at 220 deg F.
7. Minimum Pressure Rating for NPS 5 and NPS 6 (DN 125 and DN 150): 140 psig (966 kPa) at 200 deg F.
8. Minimum Pressure Rating for NPS 8 to NPS 12 (DN 200 to DN 300): 140 psig.
9. Material for Fluids Containing Acids, Alkalies, or Chemicals: EPDM.
10. Material for Water: BR.
11. End Connections: Full-faced, integral steel flanges with steel retaining rings.

2.2 GROOVED-JOINT EXPANSION JOINTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Anvil International, Inc.
 2. Shurjoint Piping Products.
 3. Victaulic Company.
 4. Or approved equal.
- B. Description: Factory-assembled expansion joint made of several grooved-end pipe nipples, couplings, and grooved joints.
- C. Standard: AWWA C606, for grooved joints.
- D. Nipples: Galvanized, ASTM A 53/A 53M, Schedule 40, Type E or S, steel pipe with grooved ends.
- E. Couplings: Five, flexible type for steel-pipe dimensions. Include ferrous housing sections, Buna-N, and bolts and nuts.

2.3 ALIGNMENT GUIDES AND ANCHORS

- A. Alignment Guides:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Advanced Thermal Systems, Inc.
 - b. Flex-Hose Co., Inc.
 - c. Flexicraft Industries.
 - d. Flex-Weld, Inc.
 - e. Hyspan Precision Products, Inc.
 - f. Metraflex, Inc.



- g. Senior Flexonics Pathway.
 - h. Unisource Manufacturing, Inc.
 - i. U.S. Bellows, Inc.
 - j. Or approved equal.
2. Description: Steel, factory-fabricated alignment guide, with bolted two-section outer cylinder and base for attaching to structure; with two-section guiding spider for bolting to pipe.
- B. Anchor Materials:
- 1. Steel Shapes and Plates: ASTM A 36/A 36M.
 - 2. Bolts and Nuts: ASME B18.10 or ASTM A 183, steel hex head.
 - 3. Washers: ASTM F 844, steel, plain, flat washers.
 - 4. Mechanical Fasteners: Insert-wedge-type stud with expansion plug anchor for use in hardened portland cement concrete, with tension and shear capacities appropriate for application.
 - a. Stud: Threaded, zinc-coated carbon steel.
 - b. Expansion Plug: Zinc-coated steel.
 - c. Washer and Nut: Zinc-coated steel.
 - 5. Chemical Fasteners: Insert-type-stud, bonding-system anchor for use with hardened portland cement concrete, with tension and shear capacities appropriate for application.
 - a. Bonding Material: ASTM C 881/C 881M, Type IV, Grade 3, two-component epoxy resin suitable for surface temperature of hardened concrete where fastener is to be installed.
 - b. Stud: ASTM A 307, zinc-coated carbon steel with continuous thread on stud unless otherwise indicated.
 - c. Washer and Nut: Zinc-coated steel.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXPANSION-JOINT INSTALLATION

- A. Install expansion joints of sizes matching sizes of piping in which they are installed.
- B. Install metal-bellows expansion joints according to EJMA's "Standards of the Expansion Joint Manufacturers Association, Inc."
- C. Install rubber packless expansion joints according to FSA-NMEJ-702.



- D. Install grooved-joint expansion joints to grooved-end steel piping

3.3 PIPE LOOP AND SWING CONNECTION INSTALLATION

- A. Install pipe loops cold-sprung in tension or compression as required to partly absorb tension or compression produced during anticipated change in temperature.
- B. Connect risers and branch connections to mains with at least five pipe fittings including tee in main.
- C. Connect risers and branch connections to terminal units with at least four pipe fittings including tee in riser.
- D. Connect mains and branch connections to terminal units with at least four pipe fittings including tee in main.

3.4 ALIGNMENT-GUIDE AND ANCHOR INSTALLATION

- A. Install alignment guides to guide expansion and to avoid end-loading and torsional stress.
- B. Install two guide(s) on each side of pipe expansion fittings and loops. Install guides nearest to expansion joint not more than four pipe diameters from expansion joint.
- C. Attach guides to pipe and secure guides to building structure.
- D. Install anchors at locations to prevent stresses from exceeding those permitted by ASME B31.9 and to prevent transfer of loading and stresses to connected equipment.
- E. Anchor Attachments:
 - 1. Anchor Attachment to Black-Steel Pipe: Attach by welding. Comply with ASME B31.9 and ASME Boiler and Pressure Vessel Code: Section IX, "Welding and Brazing Qualifications."
 - 2. Anchor Attachment to Galvanized-Steel Pipe: Attach with pipe hangers. Use MSS SP-69, Type 42, riser clamp welded to anchor.
 - 3. Anchor Attachment to Copper Tubing: Attach with pipe hangers. Use MSS SP-69, Type 24, U-bolts bolted to anchor.
- F. Fabricate and install steel anchors by welding steel shapes, plates, and bars. Comply with ASME B31.9 and AWS D1.1/D1.1M.
 - 1. Anchor Attachment to Steel Structural Members: Attach by welding.
 - 2. Anchor Attachment to Concrete Structural Members: Attach by fasteners. Follow fastener manufacturer's written instructions.
- G. Use grout to form flat bearing surfaces for guides and anchors attached to concrete.

END OF SECTION 22 05 16



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 05 17 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Sleeves.
 - 2. Stack-sleeve fittings.
 - 3. Sleeve-seal systems.
 - 4. Sleeve-seal fittings.
 - 5. Grout.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Cast-Iron Wall Pipes: Cast or fabricated of cast or ductile iron and equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop unless otherwise indicated.
- B. Galvanized-Steel Wall Pipes: ASTM A 53/A 53M, Schedule 40, with plain ends and welded steel collar; zinc coated.



- C. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.
- D. PVC-Pipe Sleeves: ASTM D 1785, Schedule 40.
- E. Galvanized-Steel-Sheet Sleeves: 0.0239-inch (0.6-mm) minimum thickness; round tube closed with welded longitudinal joint.
- F. Molded-PE or -PP Sleeves: Removable, tapered-cup shaped, and smooth outer surface with nailing flange for attaching to wooden forms.
- G. Molded-PVC Sleeves: With nailing flange for attaching to wooden forms.

2.2 STACK-SLEEVE FITTINGS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Smith, Jay R. Mfg. Co.
 - 2. Zurn Specification Drainage Operation; Zurn Plumbing Products Group.
 - 3. Wade Inc.
 - 4. Or approved equal.
- B. Description: Manufactured, cast-iron sleeve with integral clamping flange. Include clamping ring, bolts, and nuts for membrane flashing.
 - 1. Underdeck Clamp: Clamping ring with setscrews.

2.3 SLEEVE-SEAL SYSTEMS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Advance Products & Systems, Inc.
 - 2. CALPICO, Inc.
 - 3. Metraflex Company (The).
 - 4. Pipeline Seal and Insulator, Inc.
 - 5. Proco Products, Inc.
 - 6. Or approved equal.
- B. Description: Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.



1. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
2. Pressure Plates: Carbon steel.
3. Connecting Bolts and Nuts: Carbon steel, with corrosion-resistant coating, of length required to secure pressure plates to sealing elements.

2.4 SLEEVE-SEAL FITTINGS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Presealed Systems.
 2. Femco.
 3. Leak Seal.
 4. Or approved equal.
- B. Description: Manufactured plastic, sleeve-type, waterstop assembly made for imbedding in concrete slab or wall. Unit has plastic or rubber waterstop collar with center opening to match piping OD.

2.5 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.
- C. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch (25-mm) annular clear space between piping and concrete slabs and walls.



1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
1. Permanent sleeves are not required for holes in slabs formed by molded-PE or -PP sleeves.
 2. Cut sleeves to length for mounting flush with both surfaces.
 - a. Exception: Extend sleeves installed in floors of mechanical equipment areas or other wet areas 2 inches (50 mm) above finished floor level.
 3. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
1. Cut sleeves to length for mounting flush with both surfaces.
 2. Install sleeves that are large enough to provide 1/4-inch (6.4-mm) annular clear space between sleeve and pipe or pipe insulation.
 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants specified in Section 079200 "Joint Sealants."
- E. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Section 078400 "Firestopping" in architectural specifications.

3.3 STACK-SLEEVE-FITTING INSTALLATION

- A. Install stack-sleeve fittings in new slabs as slabs are constructed.
1. Install fittings that are large enough to provide 1/4-inch (6.4-mm) annular clear space between sleeve and pipe or pipe insulation.
 2. Secure flashing between clamping flanges for pipes penetrating floors with membrane waterproofing.
 3. Install section of cast-iron soil pipe to extend sleeve to 2 inches (50 mm) above finished floor level.
 4. Extend cast-iron sleeve fittings below floor slab as required to secure clamping ring if ring is specified.
 5. Using grout, seal the space around outside of stack-sleeve fittings.
- B. Fire-Barrier Penetrations: Maintain indicated fire rating of floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Section 078400 "Firestopping" in architectural specifications.



3.4 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.
- B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

3.5 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.
- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position waterstop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

3.6 SLEEVE AND SLEEVE-SEAL SCHEDULE

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
 - 1. Exterior Concrete Walls above Grade:
 - a. Piping Smaller Than NPS 6 (DN 150): Galvanized-steel wall sleeves.
 - b. Piping NPS 6 (DN 150) and Larger: Galvanized-steel wall sleeves.
 - 2. Exterior Concrete Walls below Grade:
 - a. Piping Smaller Than NPS 6 (DN 150): Cast-iron wall sleeves with sleeve-seal system
 - 1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.
 - b. Piping NPS 6 (DN 150) and Larger: Cast-iron wall sleeves with sleeve-seal system
 - 1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.
 - 3. Concrete Slabs-on-Grade:
 - a. Piping Smaller Than NPS 6 (DN 150): Cast-iron wall sleeves with sleeve-seal system
 - 1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.



- b. Piping NPS 6 (DN 150) and Larger: Cast-iron wall sleeves with sleeve-seal system
 - 1) Select sleeve size to allow for 1-inch (25-mm) annular clear space between piping and sleeve for installing sleeve-seal system.

- 4. Concrete Slabs above Grade:
 - a. Piping Smaller Than NPS 6 (DN 150): Galvanized-steel-pipe sleeves
 - b. Piping NPS 6 (DN 150) and Larger: Galvanized-steel-pipe sleeves

- 5. Interior Partitions:
 - a. Piping Smaller Than NPS 6 (DN 150): Galvanized-steel-pipe sleeves
 - b. Piping NPS 6 (DN 150) and Larger: Galvanized-steel-sheet sleeves

END OF SECTION 22 05 17

SECTION 22 05 18 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Escutcheons.
 - 2. Floor plates.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With polished, chrome-plated finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.
- C. One-Piece, Stamped-Steel Type: With chrome-plated finish and spring-clip fasteners.
- D. Split-Casting Brass Type: With polished, chrome-plated finish and with concealed hinge and setscrew.
- E. Split-Plate, Stamped-Steel Type: With chrome-plated finish, concealed hinge, and spring-clip fasteners.

2.2 FLOOR PLATES

- A. One-Piece Floor Plates: Cast-iron flange with holes for fasteners.
- B. Split-Casting Floor Plates: Cast brass with concealed hinge.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of insulated piping and with OD that completely covers opening.

- 1. Escutcheons for New Piping:

- a. Piping with Fitting or Sleeve Protruding from Wall: One-piece, deep-pattern type.
 - b. Chrome-Plated Piping: One-piece, cast-brasstype with polished, chrome-plated finish.
 - c. Insulated Piping: One-piece, stamped-steel type or split-plate, stamped-steel type with concealed hinge
 - d. Bare Piping at Wall and Floor Penetrations in Finished Spaces: One-piece, cast-brasstype with polished, chrome-plated finish.
 - e. Bare Piping at Ceiling Penetrations in Finished Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - f. Bare Piping in Unfinished Service Spaces: One-piece, cast-brass type with polished, chrome-plated finish.
 - g. Bare Piping in Equipment Rooms: One-piece, cast-brass type with polished, chrome-plated finish.

- C. Install floor plates for piping penetrations of equipment-room floors.

- D. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.

- 1. New Piping: One-piece, floor-plate type.

- 2. Existing Piping: Split-casting, floor-plate type.

3.3 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 22 05 18



SECTION 22 05 23 - GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:

1. Bronze angle valves.
2. Bronze ball valves.
3. Iron, single-flange butterfly valves.
4. Iron, grooved-end butterfly valves.
5. Bronze lift check valves.
6. Bronze swing check valves.
7. Iron swing check valves.
8. Iron, plate-type check valves.
9. Bronze gate valves.
10. Iron gate valves.
11. Bronze globe valves.
12. Iron globe valves.
13. Lubricated plug valves.
14. Chainwheels.

- B. Related Sections:

1. Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.
2. Section 221116 "Domestic Water Piping" for valves applicable only to this piping.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.4 DEFINITIONS

- A. CWP: Cold working pressure.
- B. EPDM: Ethylene propylene copolymer rubber.
- C. NBR: Acrylonitrile-butadiene, Buna-N, or nitrile rubber.
- D. NRS: Nonrising stem.
- E. OS&Y: Outside screw and yoke.
- F. RS: Rising stem.
- G. SWP: Steam working pressure.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.
- B. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.
- C. ASME Compliance:
 - 1. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
 - 2. ASME B31.1 for power piping valves.
 - 3. ASME B31.9 for building services piping valves.
- D. NSF Compliance: NSF 61 for valve materials for potable-water service.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of valve indicated.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:
 - 1. Protect internal parts against rust and corrosion.
 - 2. Protect threads, flange faces, grooves, and weld ends.
 - 3. Set angle, gate, and globe valves closed to prevent rattling.



4. Set ball and plug valves open to minimize exposure of functional surfaces.
 5. Set butterfly valves closed or slightly open.
 6. Block check valves in either closed or open position.
- B. Use the following precautions during storage:
1. Maintain valve end protection.
 2. Store valves indoors and maintain at higher than ambient dew point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.
- C. Use sling to handle large valves; rig sling to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Refer to valve schedule articles for applications of valves.
- B. Valve Pressure and Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- C. Valve Sizes: Same as upstream piping unless otherwise indicated.
- D. Valve Actuator Types:
1. Gear Actuator: For quarter-turn valves NPS 8 (DN 200) and larger.
 2. Handwheel: For valves other than quarter-turn types.
 3. Handlever: For quarter-turn valves NPS 6 (DN 150) and smaller except plug valves.
 4. Wrench: For plug valves with square heads. Furnish Commissioner with 1 wrench for every 5 plug valves, for each size square plug-valve head.
 5. Chainwheel: Device for attachment to valve handwheel, stem, or other actuator; of size and with chain for mounting height, as indicated in the "Valve Installation" Article.
- E. Valves in Insulated Piping: With 2-inch (50-mm) stem extensions and the following features:
1. Gate Valves: With rising stem.
 2. Ball Valves: With extended operating handle of non-thermal-conductive material, and protective sleeve that allows operation of valve without breaking the vapor seal or disturbing insulation.



3. Butterfly Valves: With extended neck.

F. Valve-End Connections:

1. Flanged: With flanges according to ASME B16.1 for iron valves.

2. Grooved: With grooves according to AWWA C606.

3. Solder Joint: With sockets according to ASME B16.18.

4. Threaded: With threads according to ASME B1.20.1.

G. Valve Bypass and Drain Connections: MSS SP-45.

2.2 BRONZE ANGLE VALVES

A. Class 150, Bronze Angle Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Crane Co.; Crane Valve Group; Stockham Division.
- b. Kitz Corporation.
- c. American Valve Inc.
- d. Or approved equal.

2. Description:

- a. Standard: MSS SP-80, Type 1.
- b. CWP Rating: 300 psig (2070 kPa).
- c. Body Material: ASTM B 62, bronze with integral seat and union-ring bonnet.
- d. Ends: Threaded.
- e. Stem and Disc: Bronze.
- f. Packing: Asbestos free.
- g. Handwheel: Malleable iron, aluminum.

2.3 BRONZE BALL VALVES

A. Two-Piece, Full-Port, Bronze Ball Valves with Bronze Trim:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. American Valve, Inc.
- b. Conbraco Industries, Inc.; Apollo Valves.
- c. Crane Co.; Crane Valve Group; Crane Valves.
- d. Hammond Valve.
- e. Lance Valves; a division of Advanced Thermal Systems, Inc.
- f. Legend Valve.
- g. Milwaukee Valve Company.
- h. NIBCO INC: T/S 585-70.



- i. Red-White Valve Corporation.
 - j. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - k. Or approved equal.
2. Description:
- a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Two piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Bronze.
 - i. Ball: Chrome-plated brass.
 - j. Port: Full.

B. Two-Piece, Full-Port, Bronze Ball Valves with Stainless-Steel Trim:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Hammond Valve.
 - d. Lance Valves; a division of Advanced Thermal Systems, Inc.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC T/S 585-70-66.
 - g. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - h. Or approved equal.
2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Two piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Full.

C. Two-Piece, Regular-Port, Bronze Ball Valves with Bronze Trim:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.



- b. Conbraco Industries, Inc.; Apollo Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. DynaQuip Controls.
 - f. Hammond Valve.
 - g. Lance Valves; a division of Advanced Thermal Systems, Inc.
 - h. Milwaukee Valve Company.
 - i. NIBCO INC T/S 580-70.
 - j. Or approved equal.
2. Description:
- a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Two piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Bronze.
 - i. Ball: Chrome-plated brass.
 - j. Port: Regular.
- D. Two-Piece, Regular-Port, Bronze Ball Valves with Stainless-Steel Trim:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. NIBCO T/S 580-70-66
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Hammond Valve.
 - e. Milwaukee Valve Company.
 - f. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Two piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Regular.
- E. Three-Piece, Full-Port, Bronze Ball Valves with Bronze Trim:



1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. DynaQuip Controls.
 - c. Hammond Valve.
 - d. Milwaukee Valve Company.
 - e. NIBCO INC.
 - f. Red-White Valve Corporation.
 - g. NIBCO T/S 590-Y.
 - h. Or approved equal.

2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Three piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Bronze.
 - i. Ball: Chrome-plated brass.
 - j. Port: Full.

F. Three-Piece, Full-Port, Bronze Ball Valves with Stainless-Steel Trim:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Conbraco Industries, Inc.; Apollo Valves.
 - b. Hammond Valve.
 - c. Milwaukee Valve Company.
 - d. NIBCO INC T/S-590-Y-66.
 - e. Or approved equal.

2. Description:
 - a. Standard: MSS SP-110.
 - b. SWP Rating: 150 psig (1035 kPa).
 - c. CWP Rating: 600 psig (4140 kPa).
 - d. Body Design: Three piece.
 - e. Body Material: Bronze.
 - f. Ends: Threaded.
 - g. Seats: PTFE or TFE.
 - h. Stem: Stainless steel.
 - i. Ball: Stainless steel, vented.
 - j. Port: Full.



2.4 IRON, SINGLE-FLANGE BUTTERFLY VALVES

A. 200 CWP, Iron, Single-Flange Butterfly Valves with EPDM Seat and Aluminum-Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. ABZ Valve and Controls; a division of ABZ Manufacturing, Inc.
- b. Conbraco Industries, Inc.; Apollo Valves.
- c. Cooper Cameron Valves; a division of Cooper Cameron Corporation.
- d. Crane Co.; Crane Valve Group; Jenkins Valves.
- e. Crane Co.; Crane Valve Group; Stockham Division.
- f. DeZurik Water Controls.
- g. Flo Fab Inc.
- h. Hammond Valve.
- i. Kitz Corporation.
- j. Legend Valve.
- k. Milwaukee Valve Company.
- l. NIBCO INC LD-2000.
- m. Norriseal; a Dover Corporation company.
- n. Red-White Valve Corporation.
- o. Spence Strainers International; a division of CIRCOR International, Inc.
- p. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- q. Or approved equal.

2. Description:

- a. Standard: MSS SP-67, Type I.
- b. CWP Rating: 200 psig (1380 kPa).
- c. Body Design: Lug type; suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
- d. Body Material: ASTM A 126, cast iron or ASTM A 536, ductile iron.
- e. Seat: EPDM.
- f. Stem: One- or two-piece stainless steel.
- g. Disc: Aluminum bronze.

B. 200 CWP, Iron, Single-Flange Butterfly Valves with NBR Seat and Aluminum-Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. ABZ Valve and Controls; a division of ABZ Manufacturing, Inc.
- b. Conbraco Industries, Inc.; Apollo Valves.
- c. Cooper Cameron Valves; a division of Cooper Cameron Corporation.
- d. Crane Co.; Crane Valve Group; Jenkins Valves.
- e. Crane Co.; Crane Valve Group; Stockham Division.
- f. DeZurik Water Controls.
- g. Flo Fab Inc.
- h. Hammond Valve.
- i. Kitz Corporation.



- j. Legend Valve.
 - k. Milwaukee Valve Company.
 - l. NIBCO INC LD 2100.
 - m. Norriseal; a Dover Corporation company.
 - n. Red-White Valve Corporation.
 - o. Spence Strainers International; a division of CIRCOR International, Inc.
 - p. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - q. Or approved equal.
2. Description:
- a. Standard: MSS SP-67, Type I.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Lug type; suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
 - d. Body Material: ASTM A 126, cast iron or ASTM A 536, ductile iron.
 - e. Seat: NBR.
 - f. Stem: One- or two-piece stainless steel.
 - g. Disc: Aluminum bronze.
- C. 200 CWP, Iron, Single-Flange Butterfly Valves with EPDM Seat and Ductile-Iron Disc:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. ABZ Valve and Controls; a division of ABZ Manufacturing, Inc.
 - b. American Valve, Inc.
 - c. Conbraco Industries, Inc.; Apollo Valves.
 - d. Cooper Cameron Valves; a division of Cooper Cameron Corporation.
 - e. Crane Co.; Crane Valve Group; Center Line.
 - f. Crane Co.; Crane Valve Group; Stockham Division.
 - g. DeZurik Water Controls.
 - h. Flo Fab Inc.
 - i. Hammond Valve.
 - j. Kitz Corporation.
 - k. Legend Valve.
 - l. Milwaukee Valve Company.
 - m. Mueller Steam Specialty; a division of SPX Corporation.
 - n. NIBCO INC LD 2010.
 - o. Norriseal; a Dover Corporation company.
 - p. Spence Strainers International; a division of CIRCOR International, Inc.
 - q. Sure Flow Equipment Inc.
 - r. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - s. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-67, Type I.
 - b. CWP Rating: 200 psig (1380 kPa).



- c. Body Design: Lug type; suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
- d. Body Material: ASTM A 126, cast iron or ASTM A 536, ductile iron.
- e. Seat: EPDM.
- f. Stem: One- or two-piece stainless steel.
- g. Disc: Nickel-plated or -coated ductile iron.

D. 200 CWP, Iron, Single-Flange Butterfly Valves with NBR Seat and Ductile-Iron Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following

- a. ABZ Valve and Controls; a division of ABZ Manufacturing, Inc.
- b. American Valve, Inc.
- c. Conbraco Industries, Inc.; Apollo Valves.
- d. Cooper Cameron Valves; a division of Cooper Cameron Corporation.
- e. Crane Co.; Crane Valve Group; Center Line.
- f. Crane Co.; Crane Valve Group; Stockham Division.
- g. DeZurik Water Controls.
- h. Flo Fab Inc.
- i. Hammond Valve.
- j. Kitz Corporation.
- k. Legend Valve.
- l. Milwaukee Valve Company.
- m. Mueller Steam Specialty; a division of SPX Corporation.
- n. NIBCO INC LD 2110.
- o. Norriseal; a Dover Corporation company.
- p. Spence Strainers International; a division of CIRCOR International, Inc.
- q. Sure Flow Equipment Inc.
- r. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- s. Or approved equal.

2. Description:

- a. Standard: MSS SP-67, Type I.
- b. CWP Rating: 200 psig (1380 kPa).
- c. Body Design: Lug type; suitable for bidirectional dead-end service at rated pressure without use of downstream flange.
- d. Body Material: ASTM A 126, cast iron or ASTM A 536, ductile iron.
- e. Seat: NBR.
- f. Stem: One- or two-piece stainless steel.
- g. Disc: Nickel-plated or -coated ductile iron.

2.5 IRON, GROOVED-END BUTTERFLY VALVES

A. 175 CWP, Iron, Grooved-End Butterfly Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Kennedy Valve; a division of McWane, Inc.



- b. Shurjoint Piping Products.
- c. Tyco Fire Products LP; Grinnell Mechanical Products.
- d. Victaulic Company.
- e. Or approved equal.

2. Description:

- a. Standard: MSS SP-67, Type I.
- b. CWP Rating: 175 psig (1200 kPa).
- c. Body Material: Coated, ductile iron.
- d. Stem: Two-piece stainless steel.
- e. Disc: Coated, ductile iron.
- f. Seal: EPDM.

B. 300 CWP, Iron, Grooved-End Butterfly Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Anvil International, Inc.
- b. Kennedy Valve; a division of McWane, Inc.
- c. Mueller Steam Specialty; a division of SPX Corporation.
- d. NIBCO INC.
- e. Shurjoint Piping Products.
- f. Tyco Fire Products LP; Grinnell Mechanical Products.
- g. Victaulic Company.
- h. Or approved equal.

2. Description:

- a. Standard: MSS SP-67, Type I.
- b. NPS 8 (DN 200) and Smaller CWP Rating: 300 psig (2070 kPa).
- c. NPS 10 (DN 250) and Larger CWP Rating: 200 psig (1380 kPa).
- d. Body Material: Coated, ductile iron.
- e. Stem: Two-piece stainless steel.
- f. Disc: Coated, ductile iron.
- g. Seal: EPDM.

2.6 BRONZE LIFT CHECK VALVES

A. Class 125, Lift Check Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Crane Co.; Crane Valve Group; Crane Valves.
- b. Crane Co.; Crane Valve Group; Jenkins Valves.
- c. Crane Co.; Crane Valve Group; Stockham Division.
- d. NIBCO: T/S 413-B
- e. Or approved equal.



2. Description:
 - a. Standard: MSS SP-80, Type 1.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Vertical flow.
 - d. Body Material: ASTM B 61 or ASTM B 62, bronze.
 - e. Ends: Threaded.
 - f. Disc: Bronze.

B. Class 125, Lift Check Valves with Nonmetallic Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Flo Fab Inc.
 - b. Hammond Valve.
 - c. Kitz Corporation.
 - d. Milwaukee Valve Company.
 - e. Mueller Steam Specialty; a division of SPX Corporation.
 - f. NIBCO INC: T/S 413-Y
 - g. Red-White Valve Corporation.
 - h. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - i. Or approved equal.
2. Description:
 - a. Standard: MSS SP-80, Type 2.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Vertical flow.
 - d. Body Material: ASTM B 61 or ASTM B 62, bronze.
 - e. Ends: Threaded.
 - f. Disc: NBR, PTFE, or TFE.

2.7 BRONZE SWING CHECK VALVES

A. Class 125, Bronze Swing Check Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. Hammond Valve.
 - f. Kitz Corporation.
 - g. Milwaukee Valve Company.
 - h. NIBCO INC: T/S 413-B.
 - i. Powell Valves.
 - j. Red-White Valve Corporation.



- k. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - l. Zy-Tech Global Industries, Inc.
 - m. Or approved equal.
2. Description:
- a. Standard: MSS SP-80, Type 3.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Horizontal flow.
 - d. Body Material: ASTM B 62, bronze.
 - e. Ends: Threaded.
 - f. Disc: Bronze.

B. Class 150, Bronze Swing Check Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. Kitz Corporation.
 - f. Milwaukee Valve Company.
 - g. NIBCO INC: T/S 433-B
 - h. Red-White Valve Corporation.
 - i. Zy-Tech Global Industries, Inc.
 - j. Or approved equal.
2. Description:
 - a. Standard: MSS SP-80, Type 3.
 - b. CWP Rating: 300 psig (2070 kPa).
 - c. Body Design: Horizontal flow.
 - d. Body Material: ASTM B 62, bronze.
 - e. Ends: Threaded.
 - f. Disc: Bronze.

2.8 IRON, PLATE-TYPE CHECK VALVES

A. Class 125, Iron, Dual-Plate Check Valves with Metal Seat:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. APCO Willamette Valve and Primer Corporation.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Flomatic Corporation.
 - d. Mueller Steam Specialty; a division of SPX Corporation.
 - e. NIBCO: F-918-B.
 - f. Or approved equal.
2. Description:



- a. Standard: API 594.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Wafer, spring-loaded plates.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: Bronze.
- B. Class 250, Iron, Dual-Plate Check Valves with Metal Seat:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. APCO Willamette Valve and Primer Corporation.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. NIBCO: F-968-B.
 - d. Or approved equal.
 2. Description:
 - a. Standard: API 594.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Design: Wafer, spring-loaded plates.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: Bronze.
- C. Class 125, Iron, Single-Plate Check Valves with Resilient Seat:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Flo Fab Inc.
 - b. Sure Flow Equipment Inc.
 - c. Crane Co.; Crane Valve Group; Crane Valves.
 - d. Or approved equal.
 2. Description:
 - a. Standard: API 594.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Wafer, spring-loaded plate.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: EPDM.
- D. Class 125, Iron, Dual-Plate Check Valves with Resilient Seat:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. APCO Willamette Valve and Primer Corporation.
 - b. Cooper Cameron Valves TVB Techno.
 - c. Crane Co.; Crane Valve Group; Crane Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. NIBCO INC: F-918-N (Cast Iron Seat).
 - f. Spence Strainers International; a division of CIRCOR International, Inc.
 - g. Sure Flow Equipment Inc.
 - h. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - i. Or approved equal.



2. Description:
 - a. Standard: API 594.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Design: Wafer, spring-loaded plates.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: EPDM.

E. Class 250, Iron, Wafer, Single-Plate Check Valves with Resilient Seat:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Sure Flow Equipment Inc.
 - b. American Valve Inc.
 - c. Hammond Valve Inc.
 - d. Or approved equal.
2. Description:
 - a. Standard: API 594.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Design: Wafer, spring-loaded plate.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: EPDM

F. Class 250, Iron, Dual-Plate Check Valves with Resilient Seat:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. APCO Willamette Valve and Primer Corporation.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Sure Flow Equipment Inc.
 - d. Or approved equal.
2. Description:
 - a. Standard: API 594.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Design: Wafer, spring-loaded plates.
 - d. Body Material: ASTM A 126, gray iron.
 - e. Seat: EPDM

2.9 BRONZE GATE VALVES

A. Class 125, NRS Bronze Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Valve, Inc.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. Hammond Valve.
 - f. Kitz Corporation.



- g. Milwaukee Valve Company.
 - h. NIBCO INC: T/S-113 Non-Rising Stem.
 - i. Powell Valves.
 - j. Red-White Valve Corporation.
 - k. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - l. Zy-Tech Global Industries, Inc.
 - m. Or approved equal.
2. Description:
- a. Standard: MSS SP-80, Type 1.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM B 62, bronze with integral seat and screw-in bonnet.
 - d. Ends: Threaded.
 - e. Stem: Bronze.
 - f. Disc: Solid wedge; bronze.
 - g. Packing: Asbestos free.
 - h. Handwheel: Malleable iron, bronze.

B. Class 125, RS Bronze Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. American Valve, Inc.
 - b. Crane Co.; Crane Valve Group; Crane Valves.
 - c. Crane Co.; Crane Valve Group; Jenkins Valves.
 - d. Crane Co.; Crane Valve Group; Stockham Division.
 - e. Hammond Valve.
 - f. Kitz Corporation.
 - g. Milwaukee Valve Company.
 - h. NIBCO INC.
 - i. Powell Valves.
 - j. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - k. Zy-Tech Global Industries, Inc.
 - l. Or approved equal.
2. Description:
- a. Standard: MSS SP-80, Type 2.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM B 62, bronze with integral seat and screw-in bonnet.
 - d. Ends: Threaded.
 - e. Stem: Bronze.
 - f. Disc: Solid wedge; bronze.
 - g. Packing: Asbestos free.
 - h. Handwheel: Malleable iron.

C. Class 150, RS Bronze Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Crane Co.; Crane Valve Group; Crane Valves.



- b. Crane Co.; Crane Valve Group; Stockham Division.
 - c. Hammond Valve.
 - d. Kitz Corporation.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC: T-133.
 - g. Powell Valves.
 - h. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - i. Zy-Tech Global Industries, Inc.
Or approved equal.
2. Description:
- a. Standard: MSS SP-80, Type 2.
 - b. CWP Rating: 300 psig (2070 kPa).
 - c. Body Material: ASTM B 62, bronze with integral seat and union-ring bonnet.
 - d. Ends: Threaded.
 - e. Stem: Bronze.
 - f. Disc: Solid wedge; bronze.
 - g. Packing: Asbestos free.
 - h. Handwheel: Malleable iron

2.10 IRON GATE VALVES

A. Class 125, NRS, Iron Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Jenkins Valves.
 - c. Crane Co.; Crane Valve Group; Stockham Division.
 - d. Flo Fab Inc.
 - e. Hammond Valve.
 - f. Kitz Corporation.
 - g. Legend Valve.
 - h. Milwaukee Valve Company.
 - i. NIBCO INC: F-619 Non Rising Stem.
 - j. Powell Valves.
 - k. Red-White Valve Corporation.
 - l. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - m. Zy-Tech Global Industries, Inc.
 - n. Or approved equal.
2. Description:
- a. Standard: MSS SP-70, Type I.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Disc: Solid wedge.
 - g. Packing and Gasket: Asbestos free.



B. Class 125, OS&Y, Iron Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Jenkins Valves.
 - c. Crane Co.; Crane Valve Group; Stockham Division.
 - d. Flo Fab Inc.
 - e. Hammond Valve.
 - f. Kitz Corporation.
 - g. Legend Valve.
 - h. Milwaukee Valve Company.
 - i. NIBCO INC: f-617-0.
 - j. Powell Valves.
 - k. Red-White Valve Corporation.
 - l. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - m. Zy-Tech Global Industries, Inc.
 - n. Or approved equal.

2. Description:
 - a. Standard: MSS SP-70, Type I.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Disc: Solid wedge.
 - g. Packing and Gasket: Asbestos free.

C. Class 250, NRS, Iron Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Stockham Division.
 - c. NIBCO INC: F-619-RW.
 - d. Or approved equal.

2. Description:
 - a. Standard: MSS SP-70, Type I.
 - b. CWP Rating: 500 psig (3450 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Disc: Solid wedge.
 - g. Packing and Gasket: Asbestos free.

D. Class 250, OS&Y, Iron Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Co.; Crane Valve Group; Crane Valves.



- b. Crane Co.; Crane Valve Group; Stockham Division.
 - c. Hammond Valve.
 - d. Milwaukee Valve Company.
 - e. NIBCO INC: F-667-0.
 - f. Powell Valves.
 - g. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - h. Or approved equal.
2. Description:
- a. Standard: MSS SP-70, Type I.
 - b. CWP Rating: 500 psig (3450 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Disc: Solid wedge.
 - g. Packing and Gasket: Asbestos free.

2.11 BRONZE GLOBE VALVES

A. Class 125, Bronze Globe Valves with Bronze Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Stockham Division.
 - c. Hammond Valve.
 - d. Kitz Corporation.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC: T/S 211.
 - g. Powell Valves.
 - h. Red-White Valve Corporation.
 - i. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - j. Zy-Tech Global Industries, Inc.
 - k. Or approved equal.
2. Description:
- a. Standard: MSS SP-80, Type 1.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM B 62, bronze with integral seat and screw-in bonnet.
 - d. Ends: Threaded.
 - e. Stem and Disc: Bronze.
 - f. Packing: Asbestos free.
 - g. Handwheel: Malleable iron bronze.

B. Class 125, Bronze Globe Valves with Nonmetallic Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Stockham Division.



- c. NIBCO INC: T/S-235-Y.
- d. Red-White Valve Corporation.
- e. Or approved equal.

2. Description:

- a. Standard: MSS SP-80, Type 2.
- b. CWP Rating: 200 psig (1380 kPa).
- c. Body Material: ASTM B 62, bronze with integral seat and screw-in bonnet.
- d. Ends: Threaded.
- e. Stem: Bronze.
- f. Disc: PTFE or TFE.
- g. Packing: Asbestos free.
- h. Handwheel: Malleable iron bronze.

C. Class 150, Bronze Globe Valves with Nonmetallic Disc:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Crane Co.; Crane Valve Group; Crane Valves.
- b. Hammond Valve.
- c. Kitz Corporation.
- d. Milwaukee Valve Company.
- e. NIBCO INC: T/S 235-Y.
- f. Powell Valves.
- g. Red-White Valve Corporation.
- h. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- i. Zy-Tech Global Industries, Inc.
- j. Or approved equal.

2. Description:

- a. Standard: MSS SP-80, Type 2.
- b. CWP Rating: 300 psig (2070 kPa).
- c. Body Material: ASTM B 62, bronze with integral seat and union-ring bonnet.
- d. Ends: Threaded.
- e. Stem: Bronze.
- f. Disc: PTFE or TFE.
- g. Packing: Asbestos free.
- h. Handwheel: Malleable iron bronze.

2.12 IRON GLOBE VALVES

A. Class 125, Iron Globe Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. Crane Co.; Crane Valve Group; Crane Valves.
- b. Crane Co.; Crane Valve Group; Jenkins Valves.
- c. Crane Co.; Crane Valve Group; Stockham Division.
- d. Hammond Valve.
- e. Kitz Corporation.



- f. Milwaukee Valve Company.
 - g. NIBCO INC: F-718-B.
 - h. Powell Valves.
 - i. Red-White Valve Corporation.
 - j. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - k. Zy-Tech Global Industries, Inc.
 - l. Or approved equal.
2. Description:
- a. Standard: MSS SP-85, Type I.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Packing and Gasket: Asbestos free.

B. Class 250, Iron Globe Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Jenkins Valves.
 - c. Crane Co.; Crane Valve Group; Stockham Division.
 - d. Hammond Valve.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC: F-768-B.
 - g. Watts Regulator Co.; a division of Watts Water Technologies, Inc.
 - h. Or approved equal.
2. Description:
- a. Standard: MSS SP-85, Type I.
 - b. CWP Rating: 500 psig (3450 kPa).
 - c. Body Material: ASTM A 126, gray iron with bolted bonnet.
 - d. Ends: Flanged.
 - e. Trim: Bronze.
 - f. Packing and Gasket: Asbestos free.

2.13 LUBRICATED PLUG VALVES

A. Class 125, Regular-Gland, Lubricated Plug Valves with Threaded Ends:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- a. Nordstrom Valves, Inc.
 - b. Trumbull Industries
 - c. Walworth
 - d. Or approved equal.
2. Description:
- a. Standard: MSS SP-78, Type II.



- b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.
- B. Class 125, Regular-Gland, Lubricated Plug Valves with Flanged Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Nordstrom Valves, Inc.
 - b. Trumbull Industries
 - c. Walworth
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type II.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.
- C. Class 125, Cylindrical, Lubricated Plug Valves with Threaded Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Homestead Valve; a division of Olson Technologies, Inc.
 - b. Milliken Valve Company.
 - c. R & M Energy Systems; a unit of Robbins & Myers, Inc.
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type IV.
 - b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.
- D. Class 125, Cylindrical, Lubricated Plug Valves with Flanged Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Homestead Valve; a division of Olson Technologies, Inc.
 - b. Milliken Valve Company.
 - c. R & M Energy Systems; a unit of Robbins & Myers, Inc.
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type IV.



- b. CWP Rating: 200 psig (1380 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.
- E. Class 250, Regular-Gland, Lubricated Plug Valves with Threaded Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Nordstrom Valves, Inc.
 - b. Trumbull Industries
 - c. Walworth
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type II.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.
- F. Class 250, Regular-Gland, Lubricated Plug Valves with Flanged Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Nordstrom Valves, Inc.
 - b. Trumbull Industries
 - c. Walworth
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type II.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short
 - e. Plug: Cast iron or bronze with sealant groove.
- G. Class 250, Cylindrical, Lubricated Plug Valves with Threaded Ends:
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Homestead Valve; a division of Olson Technologies, Inc.
 - b. Milliken Valve Company.
 - c. R & M Energy Systems; a unit of Robbins & Myers, Inc.
 - d. Or approved equal.
 - 2. Description:
 - a. Standard: MSS SP-78, Type IV.



- b. CWP Rating: 400 psig (2760 kPa).
- c. Body Material: ASTM A 48/A 48M or ASTM A 126, cast iron with lubrication-sealing system.
- d. Pattern: Regular or short.
- e. Plug: Cast iron or bronze with sealant groove.

H. Class 250, Cylindrical, Lubricated Plug Valves with Flanged Ends:

- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Homestead Valve; a division of Olson Technologies, Inc.
 - b. Milliken Valve Company.
 - c. R & M Energy Systems; a unit of Robbins & Myers, Inc.
 - d. Or approved equal.
- 2. Description:
 - a. Standard: MSS SP-78, Type IV.
 - b. CWP Rating: 400 psig (2760 kPa).
 - c. Body Material: ASTM A 48/A 48M or ASTM A 126, Grade 40 cast iron with lubrication-sealing system.
 - d. Pattern: Regular or short.
 - e. Plug: Cast iron or bronze with sealant groove.

2.14 CHAINWHEELS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1. Babbitt Steam Specialty Co.
- 2. Roto Hammer Industries.
- 3. Trumbull Industries.
- 4. Or approved equal.

B. Description: Valve actuation assembly with sprocket rim, brackets, and chain.

- 1. Brackets: Type, number, size, and fasteners required to mount actuator on valve.
- 2. Attachment: For connection to ball valve stems.
- 3. Sprocket Rim with Chain Guides: Ductile iron, of type and size required for valve. Include zinc.
- 4. Chain: Hot-dip, galvanized steel, of size required to fit sprocket rim.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair and restore defective valves; replace with new valves.

3.3 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install chainwheels on operators for valves NPS 4 (DN 100) and larger and more than 96 inches (2400 mm) above floor. Extend chains to 60 inches (1520 mm) above finished floor.
- F. Install check valves for proper direction of flow and as follows:
 - 1. Swing Check Valves: In horizontal position with hinge pin level.
 - 2. Center-Guided Check Valves: In horizontal or vertical position, between flanges.
 - 3. Lift Check Valves: With stem upright and plumb.

3.4 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.



3.5 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valve applications are not indicated, use the following:
 - 1. Shutoff Service: Ball, butterfly, gate, or plug valves.
 - 2. Butterfly Valve Dead-End Service: Single-flange (lug) type.
 - 3. Throttling Service: Globe or angle valves.
 - 4. Pump-Discharge Check Valves:
 - a. NPS 2 (DN 50) and Smaller: Bronze swing check valves with bronze disc.
 - b. NPS 2-1/2 (DN 65) and Larger for Domestic Water: Iron swing check valves with lever and weight or with spring or iron, center-guided, resilient-seat check valves.
 - c. NPS 2-1/2 (DN 65) and Larger for Sanitary Waste and Storm Drainage: Iron swing check valves with lever and weight or spring.
- B. If valves with specified SWP classes or CWP ratings are not available, the same types of valves with higher SWP classes or CWP ratings may be substituted.
- C. Select valves, except wafer types, with the following end connections:
 - 1. For Copper Tubing, NPS 2 (DN 50) and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules below.
 - 2. For Copper Tubing, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules below.
 - 3. For Copper Tubing, NPS 5 (DN 125) and Larger: Flanged ends.
 - 4. For Steel Piping, NPS 2 (DN 50) and Smaller: Threaded ends.
 - 5. For Steel Piping, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Flanged ends except where threaded valve-end option is indicated in valve schedules below.
 - 6. For Steel Piping, NPS 5 (DN 125) and Larger: Flanged ends.
 - 7. For Grooved-End Copper Tubing and Steel Piping: Valve ends may be grooved.

3.6 LOW-PRESSURE, COMPRESSED-AIR VALVE SCHEDULE (150 PSIG (1035 kPa) OR LESS)

- A. Pipe NPS 2 (DN 50) and Smaller:
 - 1. Bronze and Brass Valves: May be provided with solder-joint ends instead of threaded ends.
 - 2. Ball Valves: Two piece, regular port, brass with stainless-steel trim.
 - 3. Bronze Lift Check Valves: Class 125, bronze disc.



4. Bronze Swing Check Valves: Class 150, bronze disc.
5. Bronze Gate Valves: Class 150, RS.

B. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Iron Valves, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): May be provided with threaded ends instead of flanged ends.
2. Iron, Single-Flange Butterfly Valves: 200 CWP, NBR seat, ductile-iron disc.
3. Iron, Grooved-End Butterfly Valves: 175, 300 CWP.
4. Iron Swing Check Valves: Class 250, metal seats.
5. Iron, Grooved-End Swing Check Valves: 300 CWP.
6. Iron, Center-Guided Check Valves: Class 250 resilient seat.
7. Iron, Plate-Type Check Valves: Class 250, plate; resilient seat.
8. Iron Gate Valves: Class 250, OS&Y.

3.7 DOMESTIC, HOT- AND COLD-WATER VALVE SCHEDULE

A. Pipe NPS 2 (DN 50) and Smaller:

1. Bronze and Brass Valves: May be provided with solder-joint ends instead of threaded ends.
2. Bronze Angle Valves: Class 150, nonmetallic disc.
3. Ball Valves: Two piece, regular port, brass with brass trim.
4. Bronze Swing Check Valves: Class 150 disc.
5. Bronze Gate Valves: Class 150 RS.
6. Bronze Globe Valves: Class 150 bronze disc.

B. Pipe NPS 2-1/2 (DN 65) and Larger:

1. Iron Valves, NPS 2-1/2 to NPS 4 (DN 65 to DN 100): May be provided with threaded ends instead of flanged ends.
2. Iron Ball Valves: Class 150.
3. Iron, Single-Flange Butterfly Valves: 200 CWP, EPDM seat, ductile-iron disc.
4. Iron, Grooved-End Butterfly Valves: 300 CWP.



5. Iron Swing Check Valves: Class 250, metal seats.
6. Iron Swing Check Valves with Closure Control: Class 125, lever and spring.
7. Iron, Grooved-End Swing Check Valves: 300 CWP.
8. Iron, Center-Guided Check Valves: Class 250, metal resilient seat.
9. Iron, Plate-Type Check Valves: Class 250; single plate; resilient seat.
10. Iron Gate Valves: Class 250, OS&Y.
11. Iron Globe Valves: Class 250.

END OF SECTION 220523



SECTION 22 05 29 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Trapeze pipe hangers.
3. Metal framing systems.
4. Thermal-hanger shield inserts.
5. Fastener systems.
6. Pipe stands.
7. Pipe positioning systems.
8. Equipment supports.

B. Related Sections:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.
2. Section 220516 "Expansion Fittings and Loops for Plumbing Piping" for pipe guides and anchors.

1.3 DEFINITIONS

- A. MSS: Manufacturers Standardization Society of The Valve and Fittings Industry Inc.

1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Structural Steel Welding Qualifications: Qualify procedures and personnel according to AWS D1.1/D1.1M, "Structural Welding Code - Steel."



- C. Pipe Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.

1.5 PERFORMANCE REQUIREMENTS

- A. Engineering Services: Design trapeze pipe hangers and equipment supports, including comprehensive engineering analysis by a qualified professional Engineer, licensed in the State of New York, using performance requirements and design criteria indicated.
- B. Structural Performance: Hangers and supports for plumbing piping and equipment will withstand the effects of gravity loads and stresses within limits and under conditions indicated according to ASCE/SEI 7.
- C. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.6 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.7 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details and include calculations for the following; include Product Data for components:
 - 1. Trapeze pipe hangers.
 - 2. Metal framing systems.
 - 3. Fiberglass strut systems.
 - 4. Pipe stands.
 - 5. Equipment supports.
- C. Engineering Services Submittal: For trapeze hangers indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified Professional Engineer, licensed in the state of New York, responsible for their preparation.
 - 1. Detail fabrication and assembly of trapeze hangers.
 - 2. Design Calculations: Calculate requirements for designing trapeze hangers.

1.8 INFORMATIONAL SUBMITTALS

- A. Welding certificates.



PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
2. Galvanized Metallic Coatings: Pregalvanized or hot dipped.
3. Nonmetallic Coatings: Plastic coating, jacket, or liner.
4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

B. Stainless-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
2. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
3. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.

C. Copper Pipe Hangers:

1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
2. Hanger Rods: Continuous-thread rod, nuts, and washer made of stainless steel.

2.2 TRAPEZE PIPE HANGERS

- #### A.
- Description: MSS SP-69, Type 59, shop- or field-fabricated pipe-support assembly made from structural carbon-steel shapes with MSS SP-58 carbon-steel hanger rods, nuts, saddles, and U-bolts.

2.3 METAL FRAMING SYSTEMS

A. MFMA Manufacturer Metal Framing Systems:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Allied Tube & Conduit.
 - b. Cooper B-Line, Inc.
 - c. Flex-Strut Inc.
 - d. GS Metals Corp.
 - e. Thomas & Betts Corporation.
 - f. Unistrut Corporation; Tyco International, Ltd.



- g. Wesanco, Inc.
 - h. Or approved equal.
- 2. Description: Shop- or field-fabricated pipe-support assembly for supporting multiple parallel pipes.
 - 3. Standard: MFMA-4.
 - 4. Channels: Continuous slotted steel channel with inturned lips.
 - 5. Channel Nuts: Formed or stamped steel nuts or other devices designed to fit into channel slot and, when tightened, prevent slipping along channel.
 - 6. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.
 - 7. Metallic Coating: Electroplated zinc, Hot-dipped galvanized.
 - 8. Paint Coating: Epoxy.
 - 9. Plastic Coating: PVC, Polyurethane.

2.4 THERMAL-HANGER SHIELD INSERTS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Carpenter & Paterson, Inc.
 - 2. Clement Support Services.
 - 3. ERICO International Corporation.
 - 4. National Pipe Hanger Corporation.
 - 5. PHS Industries, Inc.
 - 6. Pipe Shields, Inc.; a subsidiary of Piping Technology & Products, Inc.
 - 7. Piping Technology & Products, Inc.
 - 8. Rilco Manufacturing Co., Inc.
 - 9. Value Engineered Products, Inc.
 - 10. Or approved equal.
- B. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with 100-psig (688-kPa) minimum compressive strength and vapor barrier.
- C. Insulation-Insert Material for Hot Piping: ASTM C 552, Type II cellular glass with 100-psig (688-kPa) minimum compressive strength.
- D. For Trapeze or Clamped Systems: Insert and shield will cover entire circumference of pipe.
- E. For Clevis or Band Hangers: Insert and shield will cover lower 180 degrees of pipe.
- F. Insert Length: Extend 2 inches (50 mm) beyond sheet metal shield for piping operating below ambient air temperature.



2.5 FASTENER SYSTEMS

- A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.
- B. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated stainless- steel anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

2.6 PIPE STANDS

- A. General Requirements for Pipe Stands: Shop- or field-fabricated assemblies made of manufactured corrosion-resistant components to support roof-mounted piping.
- B. Compact Pipe Stand: One-piece plastic unit with integral-rod roller, pipe clamps, or V-shaped cradle to support pipe, for roof installation without membrane penetration.
- C. Low-Type, Single-Pipe Stand: One-piece stainless-steel base unit with plastic roller, for roof installation without membrane penetration.
- D. High-Type, Single-Pipe Stand:
 - 1. Description: Assembly of base, vertical and horizontal members, and pipe support, for roof installation without membrane penetration.
 - 2. Base: Stainless steel.
 - 3. Vertical Members: Two or more cadmium-plated-steel or stainless-steel, continuous-thread rods.
 - 4. Horizontal Member: Cadmium-plated-steel or stainless-steel rod with plastic or stainless-steel, roller-type pipe support.
- E. High-Type, Multiple-Pipe Stand:
 - 1. Description: Assembly of bases, vertical and horizontal members, and pipe supports, for roof installation without membrane penetration.
 - 2. Bases: One or more; plastic.
 - 3. Vertical Members: Two or more protective-coated-steel channels.
 - 4. Horizontal Member: Protective-coated-steel channel.
 - 5. Pipe Supports: Galvanized-steel, clevis-type pipe hangers.
- F. Curb-Mounting-Type Pipe Stands: Shop- or field-fabricated pipe supports made from structural-steel shapes, continuous-thread rods, and rollers, for mounting on permanent stationary roof curb.



2.7 PIPE POSITIONING SYSTEMS

- A. Description: IAPMO PS 42, positioning system of metal brackets, clips, and straps for positioning piping in pipe spaces; for plumbing fixtures in commercial applications.

2.8 EQUIPMENT SUPPORTS

- A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon-steel shapes.

2.9 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
 - 1. Properties: Nonstaining, noncorrosive, and nongaseous.
 - 2. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 HANGER AND SUPPORT INSTALLATION

- A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.
- B. Metal Trapeze Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Arrange for grouping of parallel runs of horizontal piping, and support together on field-fabricated trapeze pipe hangers.
 - 1. Pipes of Various Sizes: Support together and space trapezes for smallest pipe size or install intermediate supports for smaller diameter pipes as specified for individual pipe hangers.
 - 2. Field fabricate from ASTM A 36/A 36M, carbon-steel shapes selected for loads being supported. Weld steel according to AWS D1.1/D1.1M.
- C. Fiberglass Pipe-Hanger Installation: Comply with applicable portions of MSS SP-69 and MSS SP-89. Install hangers and attachments as required to properly support piping from building structure.
- D. Metal Framing System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled metal framing systems.



- E. Fiberglass Strut System Installation: Arrange for grouping of parallel runs of piping, and support together on field-assembled fiberglass struts.
- F. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- G. Fastener System Installation:
 - 1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches (100 mm) thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
 - 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- H. Pipe Stand Installation:
 - 1. Pipe Stand Types except Curb-Mounted Type: Assemble components and mount on smooth roof surface. Do not penetrate roof membrane.
- I. Pipe Positioning-System Installation: Install support devices to make rigid supply and waste piping connections to each plumbing fixture.
- J. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- K. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- L. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- M. Install lateral bracing with pipe hangers and supports to prevent swaying.
- N. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 (DN 65) and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.
- O. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- P. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- Q. Insulated Piping:
 - 1. Attach clamps and spacers to piping.



- a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
 - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
 - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
- a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 (DN 100) and larger if pipe is installed on rollers.
3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields will span an arc of 180 degrees.
- a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 (DN 100) and larger if pipe is installed on rollers.
4. Shield Dimensions for Pipe: Not less than the following:
- a. NPS 1/4 to NPS 3-1/2 (DN 8 to DN 90): 12 inches (305 mm) long and 0.048 inch (1.22 mm) thick.
 - b. NPS 4 (DN 100): 12 inches (305 mm) long and 0.06 inch (1.52 mm) thick.
 - c. NPS 5 and NPS 6 (DN 125 and DN 150): 18 inches (457 mm) long and 0.06 inch (1.52 mm) thick.
 - d. NPS 8 to NPS 14 (DN 200 to DN 350): 24 inches (610 mm) long and 0.075 inch (1.91 mm) thick.
 - e. NPS 16 to NPS 24 (DN 400 to DN 600): 24 inches (610 mm) long and 0.105 inch (2.67 mm) thick.
5. Pipes NPS 8 (DN 200) and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

3.3 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make bearing surface smooth.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

3.4 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.



- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
 - 1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
 - 2. Obtain fusion without undercut or overlap.
 - 3. Remove welding flux immediately.
 - 4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

3.5 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.
- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

3.6 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils (0.05 mm).
- B. Touchup: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal are specified in Section 099000 “Painting and Coating” in architectural specifications.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair and restore paint to comply with ASTM A 780.

3.7 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.



- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports, metal trapeze pipe hangers, an metal framing systems and attachments for general service applications.
- F. Use stainless-steel pipe hangers an fiberglass pipe hanger and fiberglass strut systems and stainless-steel or corrosion-resistant attachments for hostile environment applications.
- G. Use copper-plated pipe hangers and stainless-steel attachments for copper piping and tubing.
- H. Use padded hangers for piping that is subject to scratching.
- I. Use thermal-hanger shield inserts for insulated piping and tubing.
- J. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30 (DN 15 to DN 750).
 - 2. Yoke-Type Pipe Clamps (MSS Type 2): For suspension of up to 1050 deg F (566 deg C), pipes NPS 4 to NPS 24 (DN 100 to DN 600), requiring up to 4 inches (100 mm) of insulation.
 - 3. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes NPS 3/4 to NPS 36 (DN 20 to DN 900), requiring clamp flexibility and up to 4 inches (100 mm) of insulation.
 - 4. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes NPS 1/2 to NPS 24 (DN 15 to DN 600) if little or no insulation is required.
 - 5. Pipe Hangers (MSS Type 5): For suspension of pipes NPS 1/2 to NPS 4 (DN 15 to DN 100), to allow off-center closure for hanger installation before pipe erection.
 - 6. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes NPS 3/4 to NPS 8 (DN 20 to DN 200).
 - 7. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8 (DN 15 to DN 200).
 - 8. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8 (DN 15 to DN 200).
 - 9. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8 (DN 15 to DN 200).
 - 10. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8 (DN 10 to DN 200).



11. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3 (DN 10 to DN 80).
 12. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30 (DN 15 to DN 750).
 13. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
 14. Pipe Saddle Supports (MSS Type 36): For support of pipes NPS 4 to NPS 36 (DN 100 to DN 900), with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate.
 15. Pipe Stanchion Saddles (MSS Type 37): For support of pipes NPS 4 to NPS 36 (DN 100 to DN 900), with steel-pipe base stanchion support and cast-iron floor flange or carbon-steel plate, and with U-bolt to retain pipe.
 16. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 (DN 65 to DN 900) if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
 17. Single-Pipe Rolls (MSS Type 41): For suspension of pipes NPS 1 to NPS 30 (DN 25 to DN 750), from two rods if longitudinal movement caused by expansion and contraction might occur.
 18. Adjustable Roller Hangers (MSS Type 43): For suspension of pipes NPS 2-1/2 to NPS 24 (DN 65 to DN 600), from single rod if horizontal movement caused by expansion and contraction might occur.
 19. Complete Pipe Rolls (MSS Type 44): For support of pipes NPS 2 to NPS 42 (DN 50 to DN 1050) if longitudinal movement caused by expansion and contraction might occur but vertical adjustment is not necessary.
 20. Pipe Roll and Plate Units (MSS Type 45): For support of pipes NPS 2 to NPS 24 (DN 50 to DN 600) if small horizontal movement caused by expansion and contraction might occur and vertical adjustment is not necessary.
 21. Adjustable Pipe Roll and Base Units (MSS Type 46): For support of pipes NPS 2 to NPS 30 (DN 50 to DN 750) if vertical and lateral adjustment during installation might be required in addition to expansion and contraction.
- K. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24 (DN 24 to DN 600).
 2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 (DN 20 to DN 600) if longer ends are required for riser clamps.
- L. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:



1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches (150 mm) for heavy loads.
 2. Steel Clevises (MSS Type 14): For 120 to 450 deg F (49 to 232 deg C) piping installations.
 3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
 4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
 5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F (49 to 232 deg C) piping installations.
- M. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
 2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joist construction, to attach to top flange of structural shape.
 3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
 4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
 5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
 6. C-Clamps (MSS Type 23): For structural shapes.
 7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
 8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
 9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.
 10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
 11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
 12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Use one of the following for indicated loads:
 - a. Light (MSS Type 31): 750 lb (340 kg).
 - b. Medium (MSS Type 32): 1500 lb (680 kg).



- c. Heavy (MSS Type 33): 3000 lb (1360 kg).
- 13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
- 14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
- 15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- N. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
 - 2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
 - 3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- O. Spring Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
 - 1. Restraint-Control Devices (MSS Type 47): Where indicated to control piping movement.
 - 2. Spring Cushions (MSS Type 48): For light loads if vertical movement does not exceed 1-1/4 inches (32 mm).
 - 3. Spring-Cushion Roll Hangers (MSS Type 49): For equipping Type 41, roll hanger with springs.
 - 4. Spring Sway Braces (MSS Type 50): To retard sway, shock, vibration, or thermal expansion in piping systems.
 - 5. Variable-Spring Hangers (MSS Type 51): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from hanger.
 - 6. Variable-Spring Base Supports (MSS Type 52): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from base support.
 - 7. Variable-Spring Trapeze Hangers (MSS Type 53): Preset to indicated load and limit variability factor to 25 percent to allow expansion and contraction of piping system from trapeze support.
 - 8. Constant Supports: For critical piping stress and if necessary to avoid transfer of stress from one support to another support, critical terminal, or connected equipment. Include auxiliary stops for erection, hydrostatic test, and load-adjustment capability. These supports include the following types:
 - a. Horizontal (MSS Type 54): Mounted horizontally.
 - b. Vertical (MSS Type 55): Mounted vertically.



- c. Trapeze (MSS Type 56): Two vertical-type supports and one trapeze member.
- P. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- Q. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.
- R. Use mechanical-expansion anchors instead of building attachments where required in concrete construction.
- S. Use pipe positioning systems in pipe spaces behind plumbing fixtures to support supply and waste piping for plumbing fixtures.

END OF SECTION 22 05 29



SECTION 22 05 53 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Equipment labels.
 - 2. Warning signs and labels.
 - 3. Pipe labels.
 - 4. Stencils.
 - 5. Valve tags.
 - 6. Warning tags.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- D. Valve numbering scheme.
- E. Valve Schedules: For each piping system to include in maintenance manuals.



1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.

1.6 COORDINATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

A. Metal Labels for Equipment:

- 1. Material and Thickness: Aluminum, 0.032-inch (0.8-mm) minimum thickness, and having predrilled or stamped holes for attachment hardware.
- 2. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch (64 by 19 mm).
- 3. Minimum Letter Size: 1/4 inch (6.4 mm) for name of units if viewing distance is less than 24 inches (600 mm), 1/2 inch (13 mm) for viewing distances up to 72 inches (1830 mm), and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- 4. Fasteners: Stainless-steel self-tapping screws.
- 5. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Plastic Labels for Equipment:

- 1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch (3.2 mm) thick, and having predrilled holes for attachment hardware.
- 2. Letter Color: Black.
- 3. Background Color: Yellow.
- 4. Maximum Temperature: Able to withstand temperatures up to 160 deg F (71 deg C).
- 5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch (64 by 19 mm).



6. Minimum Letter Size: 1/4 inch (6.4 mm) for name of units if viewing distance is less than 24 inches (600 mm), 1/2 inch (13 mm) for viewing distances up to 72 inches (1830 mm), and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
 7. Fasteners: Stainless-steel rivets or self-tapping screws.
 8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- C. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified.
- D. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch (A4) bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules), plus the Specification Section number and title where equipment is specified. Equipment schedule will be included in operation and maintenance data.

2.2 WARNING SIGNS AND LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch (3.2 mm) thick, and having predrilled holes for attachment hardware.
- B. Letter Color: Black.
- C. Background Color: White
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F (71 deg C).
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch (64 by 19 mm).
- F. Minimum Letter Size: 1/4 inch (6.4 mm) for name of units if viewing distance is less than 24 inches (600 mm), 1/2 inch (13 mm) for viewing distances up to 72 inches (1830 mm), and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- G. Fasteners: Stainless-steel rivets or self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Label Content: Include caution and warning information, plus emergency notification instructions.

2.3 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.



- B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings, pipe size, and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with piping system service lettering to accommodate both directions, or as separate unit on each pipe label to indicate flow direction.
 - 2. Lettering Size: At least 1-1/2 inches (38 mm)high.

2.4 STENCILS

- A. Stencils: Prepared with letter sizes according to ASME A13.1 for piping; and minimum letter height of 3/4 inch (19 mm) for access panel and door labels, equipment labels, and similar operational instructions.
 - 1. Stencil Material: Aluminum.
 - 2. Stencil Paint: Exterior, gloss, alkyd enamel black unless otherwise indicated. Paint may be in pressurized spray-can form.
 - 3. Identification Paint: Exterior, acrylic enamel in colors according to ASME A13.1 unless otherwise indicated.

2.5 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch (6.4-mm) letters for piping system abbreviation and 1/2-inch (13-mm) numbers.
 - 1. Tag Material: Brass, 0.032-inch (0.8-mm) minimum thickness, and having predrilled or stamped holes for attachment hardware.
 - 2. Fasteners: Brass wire-link or beaded chain; or S-hook.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch (A4) bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 - 1. Valve-tag schedule will be included in operation and maintenance data.

2.6 WARNING TAGS

- A. Warning Tags: Preprinted or partially preprinted, accident-prevention tags, of plasticized card stock with matte finish suitable for writing.
 - 1. Size: Approximately 4 by 7 inches (100 by 178 mm).



2. Fasteners: Brass grommet and wire.
3. Nomenclature: Large-size primary caption such as "DANGER," "CAUTION," or "DO NOT OPERATE."
4. Color: Yellow background with black lettering.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.3 EQUIPMENT LABEL INSTALLATION

- A. Install or permanently fasten labels on each major item of mechanical equipment.
- B. Locate equipment labels where accessible and visible.

3.4 PIPE LABEL INSTALLATION

- A. Piping Color-Coding: Painting of piping is specified in Section 099000 "Painting and Coating" in architectural specifications.
- B. Stenciled Pipe Label Option: Stenciled labels may be provided instead of manufactured pipe labels, at Installer's option. Install stenciled pipe labels with painted, color-coded bands or rectangles, complying with ASME A13.1, on each piping system.

1. Identification Paint: Use for contrasting background.
2. Stencil Paint: Use for pipe marking.

- C. Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:

1. Near each valve and control device.
2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.



4. At access doors, manholes, and similar access points that permit view of concealed piping.
5. Near major equipment items and other points of origination and termination.
6. Spaced at maximum intervals of 50 feet (15 m) along each run. Reduce intervals to 25 feet (7.6 m) in areas of congested piping and equipment.
7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.

D. Pipe Label Color Schedule:

1. Medium-Pressure, Compressed-Air Piping:
 - a. Background Color: White.
 - b. Letter Color: Black.
2. Domestic Water Piping:
 - a. Background Color: Blue
 - b. Letter Color: White.
3. Sanitary Waste and Storm Drainage Piping:
 - a. Background Color: Black.
 - b. Letter Color: Yellow.

3.5 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves; valves within factory-fabricated equipment units; shutoff valves; faucets; convenience and lawn-watering hose connections; and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:
 1. Valve-Tag Size and Shape:
 - a. Cold Water: 2 inches (50 mm), round.
 - b. Hot Water: 2 inches (50 mm), round.
 - c. Low-Pressure Compressed Air: 2 inches (50 mm), round.
 - d. High-Pressure Compressed Air: 2 inches (50 mm), round.
 - e. Vacuum, N₂O, CO₂, 2 inches
 2. Valve-Tag Color:
 - a. Cold Water: Green.
 - b. Hot Water: Green.
 - c. Low-Pressure Compressed Air: Green.



- d. High-Pressure Compressed Air: Green.
 - e. Vacuum, N20, C02, 2 inches
3. Letter Color:
- a. Cold Water: Black.
 - b. Hot Water: Black.
 - c. Low-Pressure Compressed Air: Black.
 - d. High-Pressure Compressed Air: Black.

3.6 WARNING-TAG INSTALLATION

- A. Write the required message on, and attach warning tags to, equipment and other items where required.

END OF SECTION 22 05 53



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 07 19 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes insulating the following plumbing piping services:
 - 1. Domestic cold-water piping.
 - 2. Domestic hot-water piping.
 - 3. Domestic recirculating hot-water piping.
 - 4. Roof drains and rainwater leaders.
 - 5. Supplies and drains for accessible lavatories and sinks.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied, if any).
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.
 - 1. Detail application of protective shields, saddles, and inserts at hangers for each type of insulation and hanger.
 - 2. Detail attachment and covering of heat tracing inside insulation.
 - 3. Detail insulation application at pipe expansion joints for each type of insulation.
 - 4. Detail insulation application at elbows, fittings, flanges, valves, and specialties for each type of insulation.
 - 5. Detail removable insulation at piping specialties, equipment connections, and access panels.
 - 6. Detail application of field-applied jackets.



7. Detail application at linkages of control devices.

C. Samples: For each type of insulation and jacket indicated. Identify each Sample, describing product and intended use. Sample sizes are as follows:

1. Preformed Pipe Insulation Materials: 12 inches (300 mm) long by NPS 2 (DN 50).
2. Jacket Materials for Pipe: 12 inches (300 mm) long by NPS 2 (DN 50).
3. Sheet Jacket Materials: 12 inches (300 mm) square.
4. Manufacturer's Color Charts: For products where color is specified, show the full range of colors available for each type of finish material.

1.5 QUALITY ASSURANCE

A. Refer to DDC General Conditions Section 014000 "Quality Requirements."

B. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft instructing program certified by the Department of Labor, Bureau of Apprenticeship and Instructing

C. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84 by an acceptable testing agency per City of New York Plumbing Code 2014. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.

1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
2. Insulation Installed Outdoors: Flame-spread index of 75 or less, and smoke-developed index of 150 or less.

D. Mockups: Before installing insulation, build mockups for each type of insulation and finish listed below to demonstrate quality of insulation application and finishes. Build mockups in the location indicated or, if not indicated, as directed by Commissioner. Use materials indicated for the completed Work.

1. Piping Mockups:

- a. One 10-foot (3-m) section of NPS 2 (DN 50) straight pipe.
- b. One each of a 90-degree threaded, welded, and flanged elbow.
- c. One each of a threaded, welded, and flanged tee fitting.
- d. One NPS 2 (DN 50) or smaller valve, and one NPS 2-1/2 (DN 65) or larger valve.
- e. Four support hangers including hanger shield and insert.
- f. One threaded strainer and one flanged strainer with removable portion of insulation.
- g. One threaded reducer and one welded reducer.
- h. One pressure temperature tap.
- i. One mechanical coupling.



2. For each mockup, fabricate cutaway sections to allow observation of application details for insulation materials, adhesives, mastics, attachments, and jackets.
 3. Notify Commissioner seven days in advance of dates and times when mockups will be constructed.
 4. Obtain Commissioner's approval of mockups before starting insulation application.
 5. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Commissioner specifically approves such deviations in writing.
 6. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 7. Demolish and remove mockups when directed.
- E. Comply with the following applicable standards and other requirements specified for miscellaneous components:
1. Supply and Drain Protective Shielding Guards: ICC A117.1-2009.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Material Test Reports: From a qualified testing agency acceptable to City of New York Plumbing Code 2014 indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.
- C. Field quality-control reports.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers will be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.8 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.
- C. Coordinate installation and testing of heat tracing.



1.9 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General," "Indoor Piping Insulation Schedule," "Outdoor, Aboveground Piping Insulation Schedule," articles for where insulating materials will be applied.
- B. Products will not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel will have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel will be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials will not use CFC or HCFC blowing agents in the manufacturing process.
- F. Mineral-Fiber Blanket Insulation: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 553, Type II and ASTM C 1290, Type I. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. CertainTeed Corp.; SoftTouch Duct Wrap.
 - b. Johns Manville; Microlite.
 - c. Knauf Insulation; Friendly Feel Duct Wrap.
 - d. Manson Insulation Inc.; Alley Wrap.
 - e. Owens Corning; SOFTR All-Service Duct Wrap.
 - f. Or approved equal.
- G. Mineral-Fiber, Preformed Pipe Insulation:
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Fibrex Insulations Inc.; Coreplus 1200.
 - b. Johns Manville; Micro-Lok.
 - c. Knauf Insulation; 1000-Degree Pipe Insulation.
 - d. Manson Insulation Inc.; Alley-K.
 - e. Owens Corning; Fiberglas Pipe Insulation.
 - f. Or approved equal.



2. Type I, 850 Deg F (454 Deg C) Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

- H. Polyolefin: Unicellular, polyethylene thermal plastic insulation. Comply with ASTM C 534 or ASTM C 1427, Type I, Grade 1 for tubular materials.

1. Products: Subject to compliance with requirements, provide one of the following:

- a. Armacell LLC; Tubolit.
- b. Nomaco Insulation; IMCOLOCK and NOMALOCK.
- c. Aerofoam USA LLC; Polyolefin N Clad.
- d. Or approved equal.

2.2 ADHESIVES

- A. Materials will be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated, unless otherwise indicated.

- B. Flexible Elastomeric and Polyolefin Adhesive: Comply with MIL-A-24179A, Type II, Class I.

1. Products: Subject to compliance with requirements, provide the following:

- a. Aeroflex USA, Inc.; Aero seal.
- b. Armacell LLC; Armaflex 520 Adhesive.
- c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-75.
- d. K-Flex USA; R-373 Contact Adhesive.
- e. Or approved equal.

2. For indoor applications, adhesive will have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

- C. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.

1. Products: Subject to compliance with requirements, provide one of the following:

- a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-127.
- b. Eagle Bridges - Marathon Industries; 225.
- c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-60/85-70.
- d. Mon-Eco Industries, Inc.; 22-25.
- e. Or approved equal.

2. For indoor applications, adhesive will have a VOC content of 80 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).



3. Adhesive will comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- D. Phenolic Adhesive: Solvent-based resin adhesive, with a service temperature range of minus 75 to plus 300 deg F (minus 59 to plus 149 deg C).
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-96.
 - b. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 81-33.
 - c. 3M; Scotch-Weld AF-15.
 - d. Or approved equal.
 2. For indoor applications, adhesive will have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- E. ASJ Adhesive, and FSK Jacket Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-82.
 - b. Eagle Bridges - Marathon Industries; 225.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 85-20.
 - d. Mon-Eco Industries, Inc.; 22-25.
 - e. Or approved equal.
 2. For indoor applications, adhesive will have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- F. PVC Jacket Adhesive: Compatible with PVC jacket.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Dow Corning Corporation; 739, Dow Silicone.
 - b. Johns Manville; Zeston Perma-Weld, CEEL-TITE Solvent Welding Adhesive.
 - c. P.I.C. Plastics, Inc.; Welding Adhesive.
 - d. Speedline Corporation; Polyco VP Adhesive.
 - e. Or approved equal.
 2. For indoor applications, adhesive will have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 3. Adhesive will comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."



2.3 MASTICS

- A. Materials will be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
 - 1. For indoor applications, use mastics that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
- B. Vapor-Barrier Mastic: Water based; suitable for indoor use on below-ambient services.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-80/30-90.
 - b. Vimasco Corporation; 749.
 - c. Childer's Brand; CP-10.
 - d. Or approved equal.
 - 2. Water-Vapor Permeance: ASTM E 96/E 96M, Procedure B, 0.013 perm (0.009 metric perm) at 43-mil (1.09-mm) dry film thickness.
 - 3. Service Temperature Range: Minus 20 to plus 180 deg F (Minus 29 to plus 82 deg C).
 - 4. Solids Content: ASTM D 1644, 58 percent by volume and 70 percent by weight.
 - 5. Color: White.
- C. Vapor-Barrier Mastic: Solvent based; suitable for indoor use on below-ambient services.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-30.
 - b. Eagle Bridges - Marathon Industries; 501.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-35.
 - d. Mon-Eco Industries, Inc.; 55-10.
 - e. Or approved equal.
 - 2. Water-Vapor Permeance: ASTM F 1249, 0.05 perm (0.03 metric perm) at 35-mil (0.9-mm) dry film thickness.
 - 3. Service Temperature Range: 0 to 180 deg F (Minus 18 to plus 82 deg C).
 - 4. Solids Content: ASTM D 1644, 44 percent by volume and 62 percent by weight.
 - 5. Color: White.
- D. Vapor-Barrier Mastic: Solvent based; suitable for outdoor use on below-ambient services.



1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; Encacel.
 - b. Eagle Bridges - Marathon Industries; 570.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 60-95/60-96.
 - d. Or approved equal.
2. Water-Vapor Permeance: ASTM F 1249, 0.05 perm (0.033 metric perm) at 30-mil (0.8-mm) dry film thickness.
3. Service Temperature Range: Minus 50 to plus 220 deg F (Minus 46 to plus 104 deg C).
4. Solids Content: ASTM D 1644, 33 percent by volume and 46 percent by weight.
5. Color: White.

E. Breather Mastic: Water based; suitable for indoor and outdoor use on above-ambient services.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-10.
 - b. Eagle Bridges - Marathon Industries; 550.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 46-50.
 - d. Mon-Eco Industries, Inc.; 55-50.
 - e. Vimasco Corporation; WC-1/WC-5.
 - f. Or approved equal.
2. Water-Vapor Permeance: ASTM F 1249, 1.8 perms (1.2 metric perms) at 0.0625-inch (1.6-mm) dry film thickness.
3. Service Temperature Range: Minus 20 to plus 180 deg F (Minus 29 to plus 82 deg C).
4. Solids Content: 60 percent by volume and 66 percent by weight.
5. Color: White.

2.4 LAGGING ADHESIVES

- A. Description: Comply with MIL-A-3316C, Class I, Grade A, and will be compatible with insulation materials, jackets, and substrates.
 1. For indoor applications, use lagging adhesives that have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 2. Products: Subject to compliance with requirements, provide one of the following:



- a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-50 AHV2.
 - b. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-36.
 - c. Vimasco Corporation; 713 and 714.
 - d. Or approved equal.
3. Fire-resistant, water-based lagging adhesive and coating for use indoors to adhere fire-resistant lagging cloths over pipe insulation.
 4. Service Temperature Range: 0 to plus 180 deg F (Minus 18 to plus 82 deg C).
 5. Color: White.

2.5 SEALANTS

A. Joint Sealants:

1. Joint Sealants for Cellular-Glass and Phenolic Products: Subject to compliance with requirements, provide the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-76.
 - b. Eagle Bridges - Marathon Industries; 405.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 30-45.
 - d. Mon-Eco Industries, Inc.; 44-05.
 - e. Pittsburgh Corning Corporation; Pittseal 444.
 - f. Or approved equal.
2. Materials will be compatible with insulation materials, jackets, and substrates.
3. Permanently flexible, elastomeric sealant.
4. Service Temperature Range: Minus 100 to plus 300 deg F (Minus 73 to plus 149 deg C).
5. Color: White or gray.
6. For indoor applications, sealants will have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

B. FSK and Metal Jacket Flashing Sealants:

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; CP-76.
 - b. Eagle Bridges - Marathon Industries; 405.
 - c. Foster Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; 95-44.
 - d. Mon-Eco Industries, Inc.; 44-05.
 - e. Or approved equal.



2. Materials will be compatible with insulation materials, jackets, and substrates.
3. Fire- and water-resistant, flexible, elastomeric sealant.
4. Service Temperature Range: Minus 40 to plus 250 deg F (Minus 40 to plus 121 deg C).
5. Color: Aluminum.
6. For indoor applications, sealants will have a VOC content of 420 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

2.6 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:
1. ASJ: White, kraft-paper, fiberglass-reinforced scrim with aluminum-foil backing; complying with ASTM C 1136, Type I.
 2. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C 1136, Type I.
 3. FSK Jacket: Aluminum-foil, fiberglass-reinforced scrim with kraft-paper backing; complying with ASTM C 1136, Type II.

2.7 FIELD-APPLIED CLOTHS

- A. Woven Glass-Fiber Fabric: Comply with MIL-C-20079H, Type I, plain weave, and presized a minimum of 8 oz./sq. yd. (271 g/sq. m).
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Alpha Associates, Inc.; Alpha-Maritex 84215 and 84217/9485RW, Luben 59.
 - b. ACP Composites; style 7628.
 - c. Rock West Composites; style 7781.
 - d. Or approved equal.

2.8 FIELD-APPLIED JACKETS

- A. Field-applied jackets will comply with ASTM C 921, Type I, unless otherwise indicated.
- B. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D 1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Johns Manville; Zeston.
 - b. P.I.C. Plastics, Inc.; FG Series.



- c. Proto Corporation; LoSmoke.
 - d. Speedline Corporation; SmokeSafe.
 - e. Or approved equal.
 - 2. Adhesive: As recommended by jacket material manufacturer.
 - 3. Color: White.
 - 4. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.
 - a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.
- C. Metal Jacket:
- 1. Products: Subject to compliance with requirements provide one of the following:
 - a. Childers Brand, Specialty Construction Brands, Inc., a business of H. B. Fuller Company; Metal Jacketing Systems.
 - b. ITW Insulation Systems; Aluminum and Stainless Steel Jacketing.
 - c. RPR Products, Inc.; Insul-Mate.
 - d. Or approved equal.
 - 2. Aluminum Jacket: Comply with ASTM B 209 (ASTM B 209M), Alloy 3003, 3005, 3105, or 5005, Temper H-14.
 - a. Finish and thickness are indicated in field-applied jacket schedules.
 - b. Moisture Barrier for Indoor Applications: 3-mil- (0.075-mm-) thick, heat-bonded polyethylene and kraft paper.
 - c. Moisture Barrier for Outdoor Applications: 3-mil- (0.075-mm-) thick, heat-bonded polyethylene and kraft paper
 - d. Factory-Fabricated Fitting Covers:
 - 1) Same material, finish, and thickness as jacket.
 - 2) Preformed 2-piece or gore, 45- and 90-degree, short- and long-radius elbows.
 - 3) Tee covers.
 - 4) Flange and union covers.
 - 5) End caps.
 - 6) Beveled collars.
 - 7) Valve covers.
 - 8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.
 - 3. Stainless-Steel Jacket: ASTM A 167 or ASTM A 240/A 240M.
 - a. Factory cut and rolled to size.
 - b. Material, finish, and thickness are indicated in field-applied jacket schedules.



- c. Moisture Barrier for Indoor Applications: 1-mil- (0.025-mm-) thick, heat-bonded polyethylene and kraft paper.
 - d. Moisture Barrier for Outdoor Applications: 3-mil- (0.075-mm-) thick, heat-bonded polyethylene and kraft paper.
 - e. Factory-Fabricated Fitting Covers:
 - 1) Same material, finish, and thickness as jacket.
 - 2) Preformed 2-piece or gore, 45- and 90-degree, short- and long-radius elbows.
 - 3) Tee covers.
 - 4) Flange and union covers.
 - 5) End caps.
 - 6) Beveled collars.
 - 7) Valve covers.
 - 8) Field fabricate fitting covers only if factory-fabricated fitting covers are not available.
- D. Underground Direct-Buried Jacket: 125-mil- (3.2-mm-) thick vapor barrier and waterproofing membrane consisting of a rubberized bituminous resin reinforced with a woven-glass fiber or polyester scrim and laminated aluminum foil.
- 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Pittsburgh Corning Corporation; Pittwrap.
 - b. Polyguard Products, Inc.; Insulrap No Torch 125.
 - c. Pittsburgh Corning; Foamglas.
 - d. Or approved equal.

2.9 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.
 - 1. Products: Subject to compliance with requirements, provide one of the following may be incorporated into the Work include, but are not limited to, the following:
 - a. ABI, Ideal Tape Division; 428 AWF ASJ.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0836.
 - c. Compac Corporation; 104 and 105.
 - d. Venture Tape; 1540 CW Plus, 1542 CW Plus, and 1542 CW Plus/SQ.
 - e. Or approved equal.
 - 2. Width: 3 inches (75 mm).
 - 3. Thickness: 11.5 mils (0.29 mm).
 - 4. Adhesion: 90 ounces force/inch (1.0 N/mm) in width.
 - 5. Elongation: 2 percent.
 - 6. Tensile Strength: 40 lbf/inch (7.2 N/mm) in width.



7. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.
- B. FSK Tape: Foil-face, vapor-retarder tape matching factory-applied jacket with acrylic adhesive; complying with ASTM C 1136.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ABI, Ideal Tape Division; 491 AWF FSK.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0827.
 - c. Compac Corporation; 110 and 111.
 - d. Venture Tape; 1525 CW NT, 1528 CW, and 1528 CW/SQ.
 - e. Or approved equal.
 2. Width: 3 inches (75 mm).
 3. Thickness: 6.5 mils (0.16 mm).
 4. Adhesion: 90 ounces force/inch (1.0 N/mm) in width.
 5. Elongation: 2 percent.
 6. Tensile Strength: 40 lbf/inch (7.2 N/mm) in width.
 7. FSK Tape Disks and Squares: Precut disks or squares of FSK tape.
- C. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ABI, Ideal Tape Division; 370 White PVC tape.
 - b. Compac Corporation; 130.
 - c. Venture Tape; 1506 CW NS.
 - d. Or approved equal.
 2. Width: 2 inches (50 mm).
 3. Thickness: 6 mils (0.15 mm).
 4. Adhesion: 64 ounces force/inch (0.7 N/mm) in width.
 5. Elongation: 500 percent.
 6. Tensile Strength: 18 lbf/inch (3.3 N/mm) in width.
- D. Aluminum-Foil Tape: Vapor-retarder tape with acrylic adhesive.
1. Products: Subject to compliance with requirements, provide one of the following:



- a. ABI, Ideal Tape Division; 488 AWF.
 - b. Avery Dennison Corporation, Specialty Tapes Division; Fasson 0800.
 - c. Compac Corporation; 120.
 - d. Venture Tape; 3520 CW.
 - e. Or approved equal.
2. Width: 2 inches (50 mm).
 3. Thickness: 3.7 mils (0.093 mm).
 4. Adhesion: 100 ounces force/inch (1.1 N/mm) in width.
 5. Elongation: 5 percent.
 6. Tensile Strength: 34 lbf/inch (6.2 N/mm) in width.

2.10 SECUREMENTS

A. Bands:

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. ITW Insulation Systems; Gerrard Strapping and Seals.
 - b. RPR Products, Inc.; Insul-Mate Strapping and Seals.
 - c. Johns Manville; JM Strapping and Seals Fastening Devices
 - d. Or approved equal.
 2. Stainless Steel: ASTM A 167 or ASTM A 240/A 240M, Type 304 or Type 316; 0.015 inch (0.38 mm) thick, 1/2 inch (13 mm) wide with closed seal.
 3. Aluminum: ASTM B 209 (ASTM B 209M), Alloy 3003, 3005, 3105, or 5005; Temper H-14, 0.020 inch (0.51 mm) thick, 3/4 inch (19 mm) wide with wing seal or closed seal.
- B. Staples: Outward-clinching insulation staples, nominal 3/4-inch- (19-mm-) wide, stainless steel or Monel.

2.11 PROTECTIVE SHIELDING GUARDS

A. Protective Shielding Pipe Covers:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Engineered Brass Company.
 - b. Insul-Tect Products Co.; a subsidiary of MVG Molded Products.
 - c. McGuire Manufacturing.
 - d. Plumberex.
 - e. Truebro; a brand of IPS Corporation.
 - f. Zurn Industries, LLC; Tubular Brass Plumbing Products Operation.
 - g. Or approved equal.



2. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.
- B. Protective Shielding Piping Enclosures,:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Truebro; a brand of IPS Corporation.
 - b. Zurn Industries, LLC; Tubular Brass Plumbing Products Operation.
 - c. ASC Engineered Solutions; Insulation Protection Shield/Lok Shield
 - d. Or approved equal.
 2. Description: Manufactured plastic enclosure for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with ADA requirements.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
1. Verify that systems to be insulated have been tested and are free of defects.
 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 PREPARATION

- A. Surface Preparation: Clean and prepare surfaces to be insulated. Before insulating, apply a corrosion coating to insulated surfaces as follows:
1. Stainless Steel: Coat 300 series stainless steel with an epoxy primer 5 mils (0.127 mm) thick and an epoxy finish 5 mils (0.127 mm) thick if operating in a temperature range between 140 and 300 deg F (60 and 149 deg C). Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.
 2. Carbon Steel: Coat carbon steel operating at a service temperature between 32 and 300 deg F (0 and 149 deg C) with an epoxy coating. Consult coating manufacturer for appropriate coating materials and application methods for operating temperature range.



- B. Coordinate insulation installation with the trade installing heat tracing. Comply with requirements for heat tracing that apply to insulation.
- C. Mix insulating cements with clean potable water; if insulating cements are to be in contact with stainless-steel surfaces, use demineralized water.

3.4 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.
- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during application and finishing.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.
- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
 - 1. Install insulation continuously through hangers and around anchor attachments.
 - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.
 - 3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
 - 4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:



1. Draw jacket tight and smooth.
 2. Cover circumferential joints with 3-inch- (75-mm-) wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches (100 mm) o.c.
 3. Overlap jacket longitudinal seams at least 1-1/2 inches (38 mm). Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches (50 mm) o.c.
 - a. For below-ambient services, apply vapor-barrier mastic over staples.
 4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
 5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- N. Finish installation with systems at operating conditions. Restore joint separations and cracking due to thermal movement.
- O. Repair and restore damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches (100 mm) beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- P. For above-ambient services, do not install insulation to the following:
1. Vibration-control devices.
 2. Testing agency labels and stamps.
 3. Nameplates and data plates.
 4. Cleanouts.

3.5 PENETRATIONS

- A. Insulation Installation at Roof Penetrations: Install insulation continuously through roof penetrations.
1. Seal penetrations with flashing sealant.
 2. For applications requiring only indoor insulation, terminate insulation above roof surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 3. Extend jacket of outdoor insulation outside roof flashing at least 2 inches (50 mm) below top of roof flashing.



4. Seal jacket to roof flashing with flashing sealant.
- B. Insulation Installation at Underground Exterior Wall Penetrations: Terminate insulation flush with sleeve seal. Seal terminations with flashing sealant.
- C. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
 1. Seal penetrations with flashing sealant.
 2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation, install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
 3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches (50 mm).
 4. Seal jacket to wall flashing with flashing sealant.
- D. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- E. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
 1. Comply with requirements in Section 078400 “Firestopping” in architectural specifications for firestopping and fire-resistive joint sealers.
- F. Insulation Installation at Floor Penetrations:
 1. Pipe: Install insulation continuously through floor penetrations.
 2. Seal penetrations through fire-rated assemblies. Comply with requirements in Section 078400 “Firestopping” in architectural specifications.

3.6 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:
 1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
 2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece will be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.



3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
 4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
 5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
 6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
 7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
 8. For services not specified to receive a field-applied jacket except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
 9. Stencil or label the outside insulation jacket of each union with the word "union." Match size and color of pipe labels.
- C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.
- D. Install removable insulation covers at locations indicated. Installation will conform to the following:
1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as adjoining pipe insulation.
 2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union long at least two times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless-steel or aluminum bands. Select band material compatible with insulation and jacket.



3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless-steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches (50 mm) over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.

3.7 INSTALLATION OF FLEXIBLE ELASTOMERIC INSULATION

- A. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- B. Insulation Installation on Pipe Flanges:
 1. Install pipe insulation to outer diameter of pipe flange.
 2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
 3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with cut sections of sheet insulation of same thickness as pipe insulation.
 4. Secure insulation to flanges and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- C. Insulation Installation on Pipe Fittings and Elbows:
 1. Install mitered sections of pipe insulation.
 2. Secure insulation materials and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
- D. Insulation Installation on Valves and Pipe Specialties:
 1. Install preformed valve covers manufactured of same material as pipe insulation when available.
 2. When preformed valve covers are not available, install cut sections of pipe and sheet insulation to valve body. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
 3. Install insulation to flanges as specified for flange insulation application.



4. Secure insulation to valves and specialties and seal seams with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.

3.8 INSTALLATION OF MINERAL-FIBER INSULATION

A. Insulation Installation on Straight Pipes and Tubes:

1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.
3. For insulation with factory-applied jackets on above-ambient surfaces, secure laps with outward clinched staples at 6 inches (150 mm) o.c.
4. For insulation with factory-applied jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Flanges:

1. Install preformed pipe insulation to outer diameter of pipe flange.
2. Make width of insulation section same as overall width of flange and bolts, plus twice the thickness of pipe insulation.
3. Fill voids between inner circumference of flange insulation and outer circumference of adjacent straight pipe segments with mineral-fiber blanket insulation.
4. Install jacket material with manufacturer's recommended adhesive, overlap seams at least 1 inch (25 mm), and seal joints with flashing sealant.

C. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

D. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.



4. Install insulation to flanges as specified for flange insulation application.

3.9 FIELD-APPLIED JACKET INSTALLATION

- A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.
 1. Draw jacket smooth and tight to surface with 2-inch (50-mm) overlap at seams and joints.
 2. Embed glass cloth between two 0.062-inch- (1.6-mm-) thick coats of lagging adhesive.
 3. Completely encapsulate insulation with coating, leaving no exposed insulation.
- B. Where FSK jackets are indicated, install as follows:
 1. Draw jacket material smooth and tight.
 2. Install lap or joint strips with same material as jacket.
 3. Secure jacket to insulation with manufacturer's recommended adhesive.
 4. Install jacket with 1-1/2-inch (38-mm) laps at longitudinal seams and 3-inch- (75-mm-) wide joint strips at end joints.
 5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.
- C. Where PVC jackets are indicated, install with 1-inch (25-mm) overlap at longitudinal seams and end joints. Seal with manufacturer's recommended adhesive.
 1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.
- D. Where metal jackets are indicated, install with 2-inch (50-mm) overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof sealant recommended by insulation manufacturer. Secure jacket with stainless-steel bands 12 inches (300 mm) o.c. and at end joints.

3.10 FINISHES

- A. Insulation with ASJ, Glass-Cloth, or Other Paintable Jacket Material: Paint jacket with paint system identified below and as specified in Section 099000 "Painting and Coating" in architectural specifications.
 1. Flat Acrylic Finish: Two finish coats over a primer that is compatible with jacket material and finish coat paint. Add fungicidal agent to render fabric mildew proof.
 - a. Finish Coat Material: Interior, flat, latex-emulsion size.



- B. Flexible Elastomeric Thermal Insulation: After adhesive has fully cured, apply two coats of insulation manufacturer's recommended protective coating.
- C. Color: Final color as selected by Commissioner. Vary first and second coats to allow visual inspection of the completed Work.
- D. Do not field paint aluminum or stainless-steel jackets.

3.11 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
 - 1. Inspect pipe, fittings, strainers, and valves, randomly selected by Commissioner, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection will be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.
- D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

3.12 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.
- B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:
 - 1. Drainage piping located in crawl spaces.
 - 2. Underground piping.
 - 3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

3.13 INDOOR PIPING INSULATION SCHEDULE

- A. Domestic Cold Water:
 - 1. NPS 1 (DN 25) and Smaller: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.
 - 2. NPS 1-1/4 (DN 32) and Larger: Insulation will be one of the following:



- a. Flexible Elastomeric: 1 inch (25 mm) thick.
- b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.

B. Domestic Hot and Recirculated Hot Water:

- 1. NPS 1-1/4 (DN 32) and Smaller: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.
- 2. NPS 1-1/2 (DN 40) and Larger: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.

C. Stormwater and Overflow:

- 1. All Pipe Sizes: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.

D. Roof Drain and Overflow Drain Bodies:

- 1. All Pipe Sizes: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch (25 mm) thick.

E. Sanitary Waste Piping Where Heat Tracing Is Installed:

- 1. All Pipe Sizes: Insulation will be one of the following:
 - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1-1/2 inches (38 mm) thick.

F. Floor Drains, Traps, and Sanitary Drain Piping within 10 Feet (3 m) of Drain Receiving Condensate and Equipment Drain Water below 60 Deg F (16 Deg C):

- 1. All Pipe Sizes: Insulation will be one of the following:
 - a. Flexible Elastomeric: 1 inch (25 mm) thick.
 - b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1/2 inch (13 mm) thick.

3.14 OUTDOOR, ABOVEGROUND PIPING INSULATION SCHEDULE

A. Domestic Water Piping:

- 1. All Pipe Sizes: Insulation will be one of the following:
 - a. Flexible Elastomeric: 2 inches (50 mm) thick.



b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 2 inches (50 mm) thick.

B. Domestic Hot and Recirculated Hot Water:

1. All Pipe Sizes: Insulation will be one of the following:

a. Flexible Elastomeric: 2 inches (50 mm) thick.

b. Mineral-Fiber, Preformed Pipe Insulation, Type I: 2 inches (50 mm) thick.

3.15 INDOOR, FIELD-APPLIED JACKET SCHEDULE

A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.

B. If more than one material is listed, selection from materials listed is Contractor's option.

C. Piping, Concealed:

1. PVC: 30 mils (0.8 mm) thick.

2. Aluminum, Smooth 0.032 inch (0.81 mm) thick.

3. Painted Aluminum, Smooth 0.020 inch (0.51 mm) thick.

4. Stainless Steel, Type 304, Smooth 2B Finish, 0.020 inch (0.51 mm) thick.

D. Piping, Exposed:

1. PVC: 30 mils (0.8 mm) thick.

2. Aluminum, Smooth, 0.040 inch (1.0 mm) thick.

3. Painted Aluminum, Smooth: 0.016 inch (0.41 mm) thick.

4. Stainless Steel, Type 304, Smooth 2B Finish, 0.020 inch (0.51 mm) thick.

3.16 UNDERGROUND, FIELD-INSTALLED INSULATION JACKET

A. For underground direct-buried piping applications, install underground direct-buried jacket over insulation material.

END OF SECTION 22 07 19

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 11 16 - DOMESTIC WATER PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Under-building-slab and aboveground domestic water pipes, tubes, and fittings inside buildings.
 - 2. Encasement for piping.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For transition fittings and dielectric fittings.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

1.6 INFORMATIONAL SUBMITTALS

- A. System purging and disinfecting activities report.
- B. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.
- B. Potable-water piping and components will comply with NSF 14 and NSF 61. Plastic piping components will be marked with "NSF-pw."



2.2 COPPER TUBE AND FITTINGS

- A. Hard Copper Tube: ASTM B 88, Type L (ASTM B 88M, Type B) water tube, drawn temper.
- B. Soft Copper Tube: ASTM B 88, Type K water tube, annealed temper.
- C. Cast-Copper, Solder-Joint Fittings: ASME B16.18, pressure fittings.
- D. Wrought-Copper, Solder-Joint Fittings: ASME B16.22, wrought-copper pressure fittings.
- E. Bronze Flanges: ASME B16.24, Class 150, with solder-joint ends.
- F. Copper Unions:
 - 1. MSS SP-123.
 - 2. Cast-copper-alloy, hexagonal-stock body.
 - 3. Ball-and-socket, metal-to-metal seating surfaces.
 - 4. Solder-joint or threaded ends.

2.3 DUCTILE-IRON PIPE AND FITTINGS (FOR INCOMING SERVICE ONLY)

- A. Mechanical-Joint, Ductile-Iron Pipe:
 - 1. AWWA C151/A21.51, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated.
 - 2. Glands, Gaskets, and Bolts: AWWA C111/A21.11, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
- B. Standard-Pattern, Mechanical-Joint Fittings:
 - 1. AWWA C110/A21.10, ductile or gray iron.
 - 2. Glands, Gaskets, and Bolts: AWWA C111/A21.11, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
- C. Compact-Pattern, Mechanical-Joint Fittings:
 - 1. AWWA C153/A21.53, ductile iron.
 - 2. Glands, Gaskets, and Bolts: AWWA C111/A21.11, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
- D. Push-on-Joint, Ductile-Iron Pipe:
 - 1. AWWA C151/A21.51.



2. Push-on-joint bell and plain spigot end unless grooved or flanged ends are indicated.

E. Standard-Pattern, Push-on-Joint Fittings:

1. AWWA C110/A21.10, ductile or gray iron.

2. Gaskets: AWWA C111/A21.11, rubber.

F. Compact-Pattern, Push-on-Joint Fittings:

1. AWWA C153/A21.53, ductile iron.

2. Gaskets: AWWA C111/A21.11, rubber.

G. Plain-End, Ductile-Iron Pipe: AWWA C151/A21.51.

H. Appurtenances for Grooved-End, Ductile-Iron Pipe:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:

a. Shurjoint Piping Products.

b. Star Pipe Products.

c. Victaulic Company.

d. Or approved equal.

2.4 PIPING JOINING MATERIALS

A. Pipe-Flange Gasket Materials:

1. AWWA C110/A21.10, rubber, flat face, 1/8 inch (3.2 mm) thick or ASME B16.21, nonmetallic and asbestos free unless otherwise indicated.

2. Full-face or ring type unless otherwise indicated.

B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.

C. Solder Filler Metals: ASTM B 32, lead-free alloys.

D. Flux: ASTM B 813, water flushable.

E. Brazing Filler Metals: AWS A5.8/A5.8M, BCuP Series, copper-phosphorus alloys for general-duty brazing unless otherwise indicated.

2.5 TRANSITION FITTINGS

A. General Requirements:

1. Same size as pipes to be joined.

2. Pressure rating at least equal to pipes to be joined.



3. End connections compatible with pipes to be joined.
- B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
- C. Sleeve-Type Transition Coupling: AWWA C219.
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Cascade Waterworks Manufacturing.
 - b. Dresser, Inc.; Piping Specialties Products.
 - c. Ford Meter Box Company, Inc. (The).
 - d. JCM Industries.
 - e. Romac Industries, Inc.
 - f. Smith-Blair, Inc.; a Sensus company.
 - g. Viking Johnson.
 - h. Or approved equal.

2.6 DIELECTRIC FITTINGS

- A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.
- B. Dielectric Unions:
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Capitol Manufacturing Company; member of the Phoenix Forge Group.
 - b. Central Plastics Company.
 - c. Hart Industries International, Inc.
 - d. Jomar International.
 - e. Matco-Norca.
 - f. McDonald, A. Y. Mfg. Co.
 - g. Watts; a division of Watts Water Technologies, Inc.
 - h. Wilkins; a Zurn company.
 - i. Or approved equal.
 2. Standard: ASSE 1079.
 3. Pressure Rating: 250 psig (1725 kPa)
 4. End Connections: Solder-joint copper alloy and threaded ferrous.
- C. Dielectric Flanges:
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Capitol Manufacturing Company; member of the Phoenix Forge Group.
 - b. Central Plastics Company.
 - c. Matco-Norca.



- d. Watts; a division of Watts Water Technologies, Inc.
 - e. Wilkins; a Zurn company.
 - f. Or approved equal.
 2. Standard: ASSE 1079.
 3. Factory-fabricated, bolted, companion-flange assembly.
 4. Pressure Rating: 175 psig (1200 kPa).
 5. End Connections: Solder-joint copper alloy and threaded ferrous; threaded solder-joint copper alloy and threaded ferrous.
- D. Dielectric-Flange Insulating Kits:
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Advance Products & Systems, Inc.
 - b. Calpico, Inc.
 - c. Central Plastics Company.
 - d. Pipeline Seal and Insulator, Inc.
 - e. Or approved equal.
 2. Nonconducting materials for field assembly of companion flanges.
 3. Pressure Rating: 150 psig (1035 kPa).
 4. Gasket: Neoprene or phenolic.
 5. Bolt Sleeves: Phenolic or polyethylene.
 6. Washers: Phenolic with steel backing washers.
- E. Dielectric Nipples:
 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Elster Perfection Corporation.
 - b. Grinnell Mechanical Products; Tyco Fire Products LP.
 - c. Matco-Norca.
 - d. Precision Plumbing Products, Inc.
 - e. Victaulic Company.
 - f. Or approved equal.
 2. Standard: IAPMO PS 66.
 3. Electroplated steel nipple complying with ASTM F 1545.
 4. Pressure Rating and Temperature: 300 psig (2070 kPa) at 225 deg F (107 deg C).



5. End Connections: Male threaded or grooved.
6. Lining: Inert and noncorrosive, propylene.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install copper tubing under building slab according to CDA's "Copper Tube Handbook."
- C. Install ductile-iron piping under building slab with restrained joints according to AWWA C600 and AWWA M41.
- D. Install shutoff valve, hose-end drain valve, strainer, pressure gage, and test tee with valve inside the building at each domestic water-service entrance. Comply with requirements for drain valves and strainers in Section 221119 "Domestic Water Piping Specialties."
- E. Install shutoff valve immediately upstream of each dielectric fitting.
- F. Install water-pressure-reducing valves downstream from shutoff valves. Comply with requirements for pressure-reducing valves in Section 221119 "Domestic Water Piping Specialties."
- G. Install domestic water piping level without pitch and plumb.
- H. Rough-in domestic water piping for water-meter installation according to utility company's requirements.
- I. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.
- J. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- K. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.
- L. Install piping to permit valve servicing.
- M. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.



- N. Install piping free of sags and bends.
- O. Install fittings for changes in direction and branch connections.
- P. Install PEX piping with loop at each change of direction of more than 90 degrees.
- Q. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.
- R. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- S. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- T. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- C. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- D. Brazed Joints for Copper Tubing: Comply with CDA's "Copper Tube Handbook," "Braze Joints" chapter.
- E. Soldered Joints for Copper Tubing: Apply ASTM B 813, water-flushable flux to end of tube. Join copper tube and fittings according to ASTM B 828 or CDA's "Copper Tube Handbook."
- F. Joint Construction for Grooved-End, Ductile-Iron Piping: Make joints according to AWWA C606. Cut round-bottom grooves in ends of pipe at gasket-seat dimension required for specified (flexible or rigid) joint. Lubricate and install gasket over ends of pipes or pipe and fitting. Install coupling housing sections over gasket with keys seated in piping grooves. Install and tighten housing bolts.
- G. Flanged Joints: Select appropriate asbestos-free, nonmetallic gasket material in size, type, and thickness suitable for domestic water service. Join flanges with gasket and bolts according to ASME B31.9.
 - 1. D 2846M Appendix.
 - 2. PVC Piping: Join according to ASTM D 2855.
- H. Joints for Dissimilar-Material Piping: Make joints using adapters compatible with materials of both piping systems.



3.4 TRANSITION FITTING INSTALLATION

- A. Install transition couplings at joints of dissimilar piping.
- B. Transition Fittings in Underground Domestic Water Piping:
 - 1. Fittings for NPS 1-1/2 (DN 40) and Smaller: Fitting-type coupling.
 - 2. Fittings for NPS 2 (DN 50) and Larger: Sleeve-type coupling.
- C. Transition Fittings in Aboveground Domestic Water Piping NPS 2 (DN 50) and Smaller: Plastic-to-metal transition fittings or unions.

3.5 DIELECTRIC FITTING INSTALLATION

- A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.
- B. Dielectric Fittings for NPS 2 and Smaller: Use dielectric couplings.
- C. Dielectric Fittings for NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Use dielectric nipples.
- D. Dielectric Fittings for NPS 5 (DN 125) and Larger: Use dielectric flange kits.

3.6 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for pipe hanger, support products, and installation in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
 - 1. Vertical Piping: MSS Type 8 or 42, clamps.
 - 2. Individual, Straight, Horizontal Piping Runs:
 - a. 100 Feet (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
 - b. Longer Than 100 Feet (30 m): MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Feet (30 m) if Indicated: MSS Type 49, spring cushion rolls.
 - 3. Multiple, Straight, Horizontal Piping Runs 100 Feet (30 m) or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
 - 4. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Support vertical piping and tubing at base and at each floor.
- C. Rod diameter may be reduced one size for double-rod hangers, to a minimum of 3/8 inch (10 mm).
- D. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:
 - 1. NPS 3/4 (DN 20) and Smaller: 60 inches (1500 mm) with 3/8-inch (10-mm) rod.



2. NPS 1 and NPS 1-1/4 (DN 25 and DN 32): 72 inches (1800 mm) with 3/8-inch (10-mm) rod.
3. NPS 1-1/2 and NPS 2 (DN 40 and DN 50): 96 inches (2400 mm) with 3/8-inch (10-mm) rod.
4. NPS 2-1/2 (DN 65): 108 inches (2700 mm) with 1/2-inch (13-mm) rod.
5. NPS 3 to NPS 5 (DN 80 to DN 125): 10 feet (3 m) with 1/2-inch (13-mm) rod.
6. NPS 6 (DN 150): 10 feet (3 m) with 5/8-inch (16-mm) rod.
7. NPS 8 (DN 200): 10 feet (3 m) with 3/4-inch (19-mm) rod.

E. Install supports for vertical copper tubing every 10 feet (3 m).

F. Install hangers for steel piping with the following maximum horizontal spacing and minimum rod diameters:

1. NPS 1-1/4 (DN 32) and Smaller: 84 inches (2100 mm) with 3/8-inch (10-mm) rod.
2. NPS 1-1/2 (DN 40): 108 inches (2700 mm) with 3/8-inch (10-mm) rod.
3. NPS 2 (DN 50): 10 feet (3 m) with 3/8-inch (10-mm) rod.
4. NPS 2-1/2 (DN 65): 11 feet (3.4 m) with 1/2-inch (13-mm) rod.
5. NPS 3 and NPS 3-1/2 (DN 80 and DN 90): 12 feet (3.7 m) with 1/2-inch (13-mm) rod.
6. NPS 4 and NPS 5 (DN 100 and DN 125): 12 feet (3.7 m) with 5/8-inch (16-mm) rod.
7. NPS 6 (DN 150): 12 feet (3.7 m) with 3/4-inch (19-mm) rod.
8. NPS 8 to NPS 12 (DN 200 to DN 300): 12 feet (3.7 m) with 7/8-inch (22-mm) rod.

G. Install supports for vertical steel piping every 15 feet (4.5 m).

3.7 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.
- C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.
- D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:
 1. Domestic Water Booster Pumps: Cold-water suction and discharge piping.



2. Water Heaters: Cold-water inlet and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
3. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by NYC plumbing code 2014.
4. Equipment: Cold- and hot-water-supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection. Use flanges instead of unions for NPS 2-1/2 (DN 65) and larger.

3.8 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification materials and installation in Section 220553 "Identification for Plumbing Piping and Equipment."
- B. Label pressure piping with system operating pressure.

3.9 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:

1. Piping Inspections:

- a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by the Commissioner.
- b. During installation, notify the Commissioner at least one day before inspection must be made. Perform tests specified below in presence of the Commissioner:
 - 1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after roughing in and before setting fixtures.
 - 2) Final Inspection: Arrange for the Commissioner to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.
- c. Reinspection: If the Commissioner finds that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
- d. Reports: Prepare inspection reports and have them signed by Commissioner.

2. Piping Tests:

- a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
- b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired or restored. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
- c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
- d. Cap and subject piping to static water pressure of 50 psig (345 kPa) above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to



stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired or restored.

- e. Repair and restore leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.
- f. Prepare reports for tests and for corrective action required.

B. Domestic water piping will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.10 ADJUSTING

A. Perform the following adjustments before operation:

- 1. Close drain valves, hydrants, and hose bibbs.
- 2. Open shutoff valves to fully open position.
- 3. Open throttling valves to proper setting.
- 4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
 - a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.
 - b. Adjust calibrated balancing valves to flows indicated.
- 5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
- 6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
- 7. Remove filter cartridges from housings and verify that cartridges are as specified for application where used and are clean and ready for use.
- 8. Check plumbing specialties and verify proper settings, adjustments, and operation.

3.11 CLEANING

A. Clean and disinfect potable domestic water piping as follows:

- 1. Purge new piping and parts of existing piping that have been altered, extended, or repaired or restored before using.
- 2. Use purging and disinfecting procedures prescribed by NYC plumbing code 2014; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Fill and isolate system according to either of the following:



- 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm (50 mg/L) of chlorine. Isolate with valves and allow to stand for 24 hours.
 - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm (200 mg/L) of chlorine. Isolate and allow to stand for three hours.
- c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
 - d. Repeat procedures if biological examination shows contamination.
 - e. Submit water samples in sterile bottles to DEP.

B. Clean non-potable domestic water piping as follows:

1. Purge new piping and parts of existing piping that have been altered, extended, or repaired or restored before using.
2. Use purging procedures prescribed by NYC plumbing code 2014 or; if methods are not prescribed, follow procedures described below:
 - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
 - b. Submit water samples in sterile bottles to DEP. Repeat procedures if biological examination shows contamination.

C. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from DEP.

D. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.

3.12 PIPING SCHEDULE

A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.

B. Flanges and unions may be used for aboveground piping joints unless otherwise indicated.

C. Under-building-slab, domestic water, building-service piping, NPS 3 (DN 80) and smaller, will be one of the following:

1. Soft copper tube, ASTM B 88, Type K wrought-copper, solder-joint fittings; and brazed joints.

D. Under-building-slab, domestic water, building-service piping, NPS 4 to NPS 8 (DN 100 to DN 200) and larger, will be one of the following:

1. Soft copper tube, ASTM B 88, Type K (ASTM B 88M, Type A), ASTM B 88, Type L (ASTM B 88M, Type B); wrought-copper, solder-joint fittings; and brazed joints.

E. Under-building-slab, domestic water piping, NPS 2 (DN 50) and smaller, will be one of the following:

1. Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); wrought-copper, fittings; and brazed joints.



- F. Aboveground domestic water piping, NPS 2 (DN 50) and smaller, will be one of the following:
1. Hard copper tube, ASTM B 88, Type L cast- or wrought-copper, solder-joint fittings; and brazed joints.
 2. Hard copper tube, ASTM B 88, Type L; copper pressure-seal-joint fittings; and pressure-sealed joints.
 3. Hard copper tube, ASTM B 88, Type L; copper push-on-joint fittings; and push-on joints.
- G. Aboveground domestic water piping, NPS 2-1/2 to NPS 4 (DN 65 to DN 100), will be one of the following:
1. Hard copper tube, ASTM B 88, Type L; cast or wrought copper, solder-joint fittings; and brazed joints.
 2. Hard copper tube, ASTM B 88, Type L; copper pressure-seal-joint fittings; and pressure-sealed joints.
 3. Hard copper tube, ASTM B 88, Type L (ASTM B 88M, Type B); grooved-joint, copper-tube appurtenances; and grooved joints.
- H. Aboveground domestic water piping, NPS 5 to NPS 8 (DN 125 to DN 200), will be one of the following:
1. Hard copper tube, ASTM B 88, Type L wrought copper, solder-joint fittings; and brazed joints.
 2. Hard copper tube, ASTM B 88, Type L; grooved-joint, copper-tube appurtenances; and grooved joints.
- I. Aboveground, combined domestic water-service and fire-service-main piping, NPS 6 to NPS 12 (DN 150 to DN 300), will be one of the following:
1. Plain-end, ductile-iron pipe; grooved-joint, ductile-iron-pipe appurtenances; and grooved joints.
 2. Galvanized-steel pipe and nipples; galvanized, gray-iron threaded fittings; and threaded joints.
 3. Galvanized-steel pipe; grooved-joint, galvanized-steel-pipe appurtenances; and grooved joints.

3.13 VALVE SCHEDULE

- A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
1. **Shutoff Duty:** Use ball or gate valves for piping NPS 2 (DN 50) and smaller. Use butterfly, ball, or gate valves with flanged ends for piping NPS 2-1/2 (DN 65) and larger.
 2. **Throttling Duty:** Use ball or globe valves for piping NPS 2 (DN 50) and smaller. Use butterfly or ball valves with flanged ends for piping NPS 2-1/2 (DN 65) and larger.
 3. **Hot-Water Circulation Piping, Balancing Duty:** Calibrated or Memory-stop balancing valves.
 4. **Drain Duty:** Hose-end drain valves.

- B. Use check valves to maintain correct direction of domestic water flow to and from equipment.
- C. Iron grooved-end valves may be used with grooved-end piping.

END OF SECTION 22 11 16



SECTION 22 11 19 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section Includes:

1. Vacuum breakers.
2. Backflow preventers.
3. Water pressure-reducing valves.
4. Balancing valves.
5. Strainers.
6. Hose bibbs.
7. Wall hydrants.
8. Drain valves.
9. Water-hammer arresters.
10. Air vents.
11. Trap-seal primer valves.
12. Trap-seal primer systems.
13. Flexible connectors.
14. Water meters.

B. Related Requirements:

1. Section 221116 "Domestic Water Piping" for water meters.
2. Section 224713 "Drinking Fountains" for drinking fountains.



1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: For domestic water piping specialties.
 - 1. Include diagrams for power, signal, and control wiring.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.

1.6 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

- A. Potable-water piping and components will comply with NSF 61 and NSF 14.

2.2 PERFORMANCE REQUIREMENTS

- A. Minimum Working Pressure for Domestic Water Piping Specialties: 200 psig unless otherwise indicated.

2.3 VACUUM BREAKERS

- A. Pipe-Applied, Atmospheric-Type Vacuum Breakers:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Ames Fire & Waterworks; a division of Watts Water Technologies, Inc.
 - b. Cash Acme; a division of Reliance Worldwide Corporation.
 - c. Conbraco Industries, Inc.
 - d. FEBCO; a division of Watts Water Technologies, Inc.
 - e. Rain Bird Corporation.
 - f. Toro Company (The); Irrigation Div.
 - g. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.



- h. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - i. Or approved equal.
 - 2. Standard: ASSE 1001.
 - 3. Size: NPS 1/4 to NPS 3 (DN 8 to DN 80), as required to match connected piping.
 - 4. Body: Bronze.
 - 5. Inlet and Outlet Connections: Threaded.
 - 6. Finish: Rough bronze.
- B. Hose-Connection Vacuum Breakers:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Arrowhead Brass Products.
 - b. Cash Acme; a division of Reliance Worldwide Corporation.
 - c. Conbraco Industries, Inc.
 - d. Legend Valve.
 - e. MIFAB, Inc.
 - f. Prier Products, Inc.
 - g. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - h. Woodford Manufacturing Company; a division of WCM Industries, Inc.
 - i. Zurn Industries, LLC; Plumbing Products Group; Light Commercial Products.
 - j. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - k. Or approved equal.
 - 2. Standard: ASSE 1011.
 - 3. Body: Bronze, nonremovable, with manual drain.
 - 4. Outlet Connection: Garden-hose threaded complying with ASME B1.20.7.
 - 5. Finish: Chrome or nickel plated.
- C. Pressure Vacuum Breakers:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Ames Fire & Waterworks; a division of Watts Water Technologies, Inc.
 - b. Conbraco Industries, Inc.
 - c. FEBCO; a division of Watts Water Technologies, Inc.
 - d. Flomatic Corporation.
 - e. Toro Company (The); Irrigation Div.
 - f. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - g. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - h. Or approved equal.



2. Standard: ASSE 1020.
3. Operation: Continuous-pressure applications.
4. Pressure Loss: 5 psig (35 kPa) maximum, through middle third of flow range.
5. Accessories:
 - a. Valves: Ball type, on inlet and outlet.

D. Spill-Resistant Vacuum Breakers:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Conbraco Industries, Inc.
 - b. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - c. Bell & Gossett
 - d. Or approved equal.
2. Standard: ASSE 1056.
3. Operation: Continuous-pressure applications.
4. Size: NPS 1/2 (DN 15).
5. Accessories:
 - a. Valves: Ball type, on inlet and outlet.

2.4 BACKFLOW PREVENTERS

A. Intermediate Atmospheric-Vent Backflow Preventers:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Cash Acme; a division of Reliance Worldwide Corporation.
 - b. Conbraco Industries, Inc.
 - c. FEBCO; a division of Watts Water Technologies, Inc.
 - d. Honeywell International Inc.
 - e. Legend Valve.
 - f. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - g. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - h. Or approved equal.
2. Standard: ASSE 1012.
3. Operation: Continuous-pressure applications.
4. Size: Refer to drawings.



5. Body: Bronze.
 6. End Connections: Union, solder joint.
 7. Finish: Rough bronze.
- B. Reduced-Pressure-Principle Backflow Preventers:
1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Ames Fire & Waterworks; a division of Watts Water Technologies, Inc.
 - b. Conbraco Industries, Inc.
 - c. FEBCO; a division of Watts Water Technologies, Inc.
 - d. Flomatic Corporation.
 - e. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - f. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - g. Or approved equal.
 2. Standard: ASSE 1013.
 3. Operation: Continuous-pressure applications.
 4. Pressure Loss: 12 psig (83 kPa) maximum, through middle third of flow range.
 5. Size: NPS 6.
 6. Body: Bronze for NPS 2 (DN 50) and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved
 7. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.
 8. Configuration: Designed for horizontal, straight-through flow.
 9. Accessories:
 - a. Valves NPS 2 (DN 50) and Smaller: Ball type with threaded ends on inlet and outlet.
 - b. Valves NPS 2-1/2 (DN 65) and Larger: Outside-screw and yoke-gate type with flanged ends on inlet and outlet.
 - c. Air-Gap Fitting: ASME A112.1.2, matching backflow-preventer connection.
- C. Hose-Connection Backflow Preventers:
1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Conbraco Industries, Inc.
 - b. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - c. Woodford Manufacturing Company; a division of WCM Industries, Inc.
 - d. Or approved equal.



2. Standard: ASSE 1052.
3. Operation: Up to 10-foot head of water (30-kPa) back pressure.
4. Inlet Size: NPS 1/2 or NPS 3/4 (DN 15 or DN 20).
5. Outlet Size: Garden-hose thread complying with ASME B1.20.7.
6. Capacity: At least 3-gpm (0.19-L/s) flow.

D. Backflow-Preventer Test Kits:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Conbraco Industries, Inc.
 - b. FEBCO; a division of Watts Water Technologies, Inc.
 - c. Flomatic Corporation.
 - d. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - e. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - f. Or approved equal.
2. Description: Factory calibrated, with gages, fittings, hoses, and carrying case with test-procedure instructions.

2.5 WATER PRESSURE-REDUCING VALVES

A. Water Regulators:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Cash Acme; a division of Reliance Worldwide Corporation.
 - b. Conbraco Industries, Inc.
 - c. Honeywell International Inc.
 - d. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - e. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - f. Or approved equal.
2. Standard: ASSE 1003.
3. Pressure Rating: Initial working pressure of 150 psig (1035 kPa).
4. Body: Bronze with chrome-plated finish for NPS 2 (DN 50) and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved for NPS 2-1/2 and NPS 3 (DN 65 and DN 80).
5. Valves for Booster Heater Water Supply: Include integral bypass.
6. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 and NPS 3 (DN 65 and DN 80).



B. Water-Control Valves:

1. **Manufacturers:** Subject to compliance with requirements, provide products by the following:
 - a. CLA-VAL.
 - b. Flomatic Corporation.
 - c. OCV Control Valves.
 - d. Watts; a division of Watts Water Technologies, Inc.; Control Valves (Watts ACV).
 - e. Zurn Industries, LLC; Plumbing Products Group; Wilkins Water Control Products.
 - f. Or approved equal.
2. **Description:** Pilot-operated, diaphragm-type, single-seated, main water-control valve.
3. **Pressure Rating:** Initial working pressure of 150 psig (1035 kPa) minimum with AWWA C550 or FDA-approved, interior epoxy coating. Include small pilot-control valve, restrictor device, specialty fittings, and sensor piping.
4. **Main Valve Body:** Cast- or ductile-iron body with AWWA C550 or FDA-approved, interior epoxy coating; or stainless-steel body.
 - a. **Pattern:** Globe valve design.
 - b. **Trim:** Stainless steel.
5. **End Connections:** Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.

2.6 BALANCING VALVES

A. Copper-Alloy Calibrated Balancing Valves:

1. **Manufacturers:** Subject to compliance with requirements, provide products by the following:
 - a. Armstrong International, Inc.
 - b. Flo Fab Inc.
 - c. ITT Corporation; Bell & Gossett Div.
 - d. NIBCO Inc.
 - e. TAC.
 - f. TACO Incorporated.
 - g. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - h. Or approved equal.
2. **Type:** Ball valve with two readout ports and memory-setting indicator.
3. **Body:** Brass
4. **Size:** Same as connected piping, but not larger than NPS 2 (DN 50).
5. **Accessories:** Meter hoses, fittings, valves, differential pressure meter, and carrying case.



B. Cast-Iron Calibrated Balancing Valves :

1. **Manufacturers:** Subject to compliance with requirements, provide products by the following:

- a. Armstrong International, Inc.
- b. Flo Fab Inc.
- c. ITT Corporation; Bell & Gossett Div.
- d. NIBCO Inc.
- e. TAC.
- f. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
- g. Or approved equal.

2. **Type:** Adjustable with Y-pattern globe valve, two readout ports, and memory-setting indicator.

3. **Size:** Same as connected piping, but not smaller than NPS 2-1/2 (DN 65).

C. Accessories: Meter hoses, fittings, valves, differential pressure meter, and carrying case.

2.7 TEMPERATURE-ACTUATED, WATER MIXING VALVES

A. Manifold, Thermostatic, Water Mixing-Valve Assemblies:

1. **Manufacturers:** Subject to compliance with requirements, provide products by the following:

- a. Leonard Valve Company.
- b. Powers; a division of Watts Water Technologies, Inc.
- c. Symmons Industries, Inc.
- d. Or approved equal.

2. **Description:** Factory-fabricated, exposed-mounted, thermostatically controlled, water mixing-valve assembly in three-valve parallel arrangement.

3. **Large-Flow Parallel:** Thermostatic, water mixing valve and downstream-pressure regulator with pressure gages on inlet and outlet.

4. **Intermediate-Flow Parallel:** Thermostatic, water mixing valve and downstream-pressure regulator with pressure gages on inlet and outlet.

5. **Small-Flow Parallel:** Thermostatic, water mixing valve.

6. **Thermostatic Mixing Valves:** Comply with ASSE 1017. Include check stops on hot- and cold-water inlets and shutoff valve on outlet.

7. **Water Regulator(s):** Comply with ASSE 1003. Include pressure gage on inlet and outlet.

8. **Pressure Rating:** 125 psig (860 kPa) minimum unless otherwise indicated.

9. **Cabinet:** Factory fabricated, stainless steel, for surface mounting and with hinged, stainless-steel door.



10. Selected Large-Flow, Tempered-Water Valve Size: Match paper size.
11. Tempered-Water Setting: Between 85 and 110 deg. F
12. Unit Minimum Tempered-Water Design Flow Rate: 5 GPM.
13. Unit Tempered-Water Outlet Size: end connection.
14. Unit Hot- and Cold-Water Inlet Size: end connections.
15. Thermostatic Mixing Valve and Water Regulator Finish: Rough bronze.
16. Piping Finish: Copper.

2.8 STRAINERS FOR DOMESTIC WATER PIPING

A. Y-Pattern Strainers:

1. Pressure Rating: 125 psig (860 kPa) minimum unless otherwise indicated.
2. Body: Bronze for NPS 2 (DN 50) and smaller; cast iron with interior lining that complies with AWWA C550 or that is FDA approved, epoxy coated for NPS 2-1/2 (DN 65) and larger.
3. End Connections: Threaded for NPS 2 (DN 50) and smaller; flanged for NPS 2-1/2 (DN 65) and larger.
4. Screen: Stainless steel with round perforations unless otherwise indicated.
5. Perforation Size:
 - a. Strainers NPS 2 (DN 50) and Smaller: 0.033 inch (0.84 mm).
 - b. Strainers NPS 2-1/2 to NPS 4 (DN 65 to DN 100): 0.062 inch (1.57 mm).
 - c. Strainers NPS 5 (DN 125) and Larger: 0.125 inch (3.18 mm).
6. Drain: Factory-installed, hose-end drain valve.

2.9 HOSE BIBBS

A. Hose Bibbs:

1. Standard: ASME A112.18.1 for sediment faucets.
2. Body Material: Bronze.
3. Seat: Bronze, replaceable.
4. Supply Connections: NPS 1/2 or NPS 3/4 (DN 15 or DN 20) threaded or solder-joint inlet.
5. Outlet Connection: Garden-hose thread complying with ASME B1.20.7.



6. Pressure Rating: 125 psig (860 kPa).
7. Vacuum Breaker: Integral nonremovable, drainable, hose-connection vacuum breaker complying with ASSE 1011.
8. Finish for Equipment Rooms: Rough bronze, or chrome or nickel plated.
9. Finish for Service Areas: Rough bronze.
10. Finish for Finished Rooms: Chrome or nickel plated.
11. Operation for Equipment Rooms: Wheel handle or operating key.
12. Operation for Service Areas: Operating key.
13. Operation for Finished Rooms: Operating key.
14. Include operating key with each operating-key hose bibb.
15. Include integral wall flange with each chrome- or nickel-plated hose bibb.

2.10 WALL HYDRANTS

A. Nonfreeze Wall Hydrants:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Josam Company.
 - b. MIFAB, Inc.
 - c. Prier Products, Inc.
 - d. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - e. Tyler Pipe; Wade Div.
 - f. Watts Drainage Products.
 - g. Woodford Manufacturing Company; a division of WCM Industries, Inc.
 - h. Zurn Industries, LLC; Plumbing Products Group; Light Commercial Products.
 - i. Zurn Industries, LLC; Plumbing Products Group; Specification Drainage Products.
 - j. Or approved equal.
2. Standard: ASME A112.21.3M for concealed-outlet, self-draining wall hydrants.
3. Pressure Rating: 125 psig (860 kPa).
4. Operation: Loose key.
5. Casing and Operating Rod: Of length required to match wall thickness. Include wall clamp.
6. Inlet: NPS 3/4 or NPS 1 (DN 20 or DN 25).



7. Outlet: Concealed, with integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
 8. Box: Deep, flush mounted with cover.
 9. Box and Cover Finish: Polished nickel bronze.
 10. Outlet: Exposed, with integral vacuum breaker and garden-hose thread complying with ASME B1.20.7.
 11. Nozzle and Wall-Plate Finish: Polished nickel bronze.
 12. Operating Keys(s): One with each wall hydrant.
- B. Nonfreeze, Hot- and Cold-Water Wall Hydrants:
1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. Josam Company.
 - b. Prier Products, Inc.
 - c. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - d. Tyler Pipe; Wade Div.
 - e. Watts Drainage Products.
 - f. Woodford Manufacturing Company; a division of WCM Industries, Inc.
 - g. Zurn Industries, LLC; Plumbing Products Group; Specification Drainage Products.
 - h. Or approved equal.
 2. Standard: ASME A112.21.3M for concealed-outlet, self-draining wall hydrants.
 3. Pressure Rating: 125 psig (860 kPa).
 4. Operation: Loose key.
 5. Casing and Operating Rods: Of length required to match wall thickness. Include wall clamps.
 6. Inlet: NPS 3/4 or NPS 1 (DN 20 or DN 25).
 7. Outlet: Concealed.
 8. Box: Deep, flush mounted with cover.
 9. Box and Cover Finish: Polished nickel bronze.
 10. Vacuum Breaker:
 - a. Nonremovable, manual-drain-type, hose-connection vacuum breaker complying with ASSE 1011 or backflow preventer complying with ASSE 1052.
 - b. Garden-hose thread complying with ASME B1.20.7 on outlet.



11. Operating Keys(s): One with each wall hydrant.

2.11 DRAIN VALVES

A. Ball-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-110 for standard-port, two-piece ball valves.
2. Pressure Rating: 400-psig (2760-kPa) minimum CWP.
3. Size: NPS 3/4 (DN 20).
4. Body: Copper alloy.
5. Ball: Chrome-plated brass.
6. Seats and Seals: Replaceable.
7. Handle: Vinyl-covered steel.
8. Inlet: Threaded or solder joint.
9. Outlet: Threaded, short nipple with garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

B. Gate-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-80 for gate valves.
2. Pressure Rating: Class 125.
3. Size: NPS 3/4 (DN 20).
4. Body: ASTM B 62 bronze.
5. Inlet: NPS 3/4 (DN 20) threaded or solder joint.
6. Outlet: Garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

C. Stop-and-Waste Drain Valves:

1. Standard: MSS SP-110 for ball valves or MSS SP-80 for gate valves.
2. Pressure Rating: 200-psig (1380-kPa) minimum CWP or Class 125.
3. Size: NPS 3/4 (DN 20).
4. Body: Copper alloy or ASTM B 62 bronze.
5. Drain: NPS 1/8 (DN 6) side outlet with cap.



2.12 WATER-HAMMER ARRESTERS

A. Water-Hammer Arresters:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. AMTROL, Inc.
 - b. Josam Company.
 - c. MIFAB, Inc.
 - d. Precision Plumbing Products, Inc.
 - e. Sioux Chief Manufacturing Company, Inc.
 - f. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - g. Tyler Pipe; Wade Div.
 - h. Watts Drainage Products.
 - i. Zurn Industries, LLC; Plumbing Products Group; Specification Drainage Products.
 - j. Or approved equal.
2. Standard: ASSE 1010 or PDI-WH 201.
3. Type: Metal bellows.
4. Size: ASSE 1010, Sizes AA and A through F, or PDI-WH 201, Sizes A through F.

2.13 AIR VENTS

A. Bolted-Construction Automatic Air Vents:

1. Body: Bronze.
2. Pressure Rating and Temperature: 125-psig (860-kPa) minimum pressure rating at 140 deg F (60 deg C).
3. Float: Replaceable, corrosion-resistant metal.
4. Mechanism and Seat: Stainless steel.
5. Size: NPS 1/2 (DN 15) minimum inlet.
6. Inlet and Vent Outlet End Connections: Threaded.

B. Welded-Construction Automatic Air Vents:

1. Body: Stainless steel.
2. Pressure Rating: 150-psig (1035-kPa) minimum pressure rating.
3. Float: Replaceable, corrosion-resistant metal.
4. Mechanism and Seat: Stainless steel.



5. Size: NPS 3/8 (DN 10) minimum inlet.
6. Inlet and Vent Outlet End Connections: Threaded.

2.14 TRAP-SEAL PRIMER DEVICE

A. Supply-Type, Trap-Seal Primer Device:

1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. MIFAB, Inc.
 - b. Precision Plumbing Products, Inc.
 - c. Sioux Chief Manufacturing Company, Inc.
 - d. Smith, Jay R. Mfg. Co.; Division of Smith Industries, Inc.
 - e. Watts; a division of Watts Water Technologies, Inc.; Watts Regulator Company.
 - f. Or approved equal.
2. Standard: ASSE 1018.
3. Pressure Rating: 125 psig (860 kPa) minimum.
4. Body: Bronze.
5. Inlet and Outlet Connections: NPS 1/2 (DN 15) threaded, union, or solder joint.
6. Gravity Drain Outlet Connection: NPS 1/2 (DN 15) threaded or solder joint.
7. Finish: Chrome plated, or rough bronze for units used with pipe or tube that is not chrome finished.

2.15 WATER METERS

A. Displacement-Type Water Meters:

1. Manufacturers: Subject to compliance with requirements, products by one of the following:
 - a. AALIANT; a Venture Measurement product line.ABB.Badger Meter, Inc.
 - b. Carlon Meter.
 - c. Mueller Co. Ltd.; a subsidiary of Mueller Water Products Inc.
 - d. Schlumberger Limited; Water Services.
 - e. Sensus.
 - f. Or approved equal.
2. Description:
 - a. Standard: AWWA C700.
 - b. Pressure Rating: 150-psig (1035-kPa) working pressure.
 - c. Body Design: Nutating disc; totalization meter.
 - d. Registration: In gallons (liters) or cubic feet (cubic meters) as required by utility company.
 - e. Case: Bronze.



- f. End Connections: Threaded.
- B. Turbine-Type Water Meters:
- 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. AALIANT; a Venture Measurement product line.
 - b. ABB.
 - c. Badger Meter, Inc.
 - d. Hays Fluid Controls.
 - e. Master Meter, Inc.
 - f. McCrometer, Inc.
 - g. Mueller Co. Ltd.; a subsidiary of Mueller Water Products Inc.
 - h. Schlumberger Limited; Water Services.
 - i. SeaMetrics Inc.
 - j. Sensus.
 - k. Or approved equal.
 - 2. Description:
 - a. Standard: AWWA C701.
 - b. Pressure Rating: 150-psig (1035-kPa) working pressure.
 - c. Body Design: Turbine; totalization meter.
 - d. Registration: In gallons (liters) or cubic feet (cubic meters) as required by utility company.
 - e. Case: Bronze.
 - f. End Connections for Meters NPS 2 (DN 50) and Smaller: Threaded.
 - g. End Connections for Meters NPS 2-1/2 (DN 65) and Larger: Flanged.
- C. Compound-Type Water Meters:
- 1. Manufacturers: Subject to compliance with requirements, provide products by the following:
 - a. ABB.
 - b. Badger Meter, Inc.
 - c. Master Meter, Inc.
 - d. Mueller Co. Ltd.; a subsidiary of Mueller Water Products Inc.
 - e. Schlumberger Limited; Water Services.
 - f. Sensus.
 - g. Or approved equal.
 - 2. Description:
 - a. Standard: AWWA C702.
 - b. Pressure Rating: 150-psig (1035-kPa) working pressure.
 - c. Body Design: With integral mainline and bypass meters; totalization meter.
 - d. Registration: In gallons (liters) or cubic feet (cubic meters) as required by utility company.
 - e. Case: Bronze.
 - f. Pipe Connections: Flanged.



- D. Remote Registration System: Direct-reading type complying with AWWA C706; modified with signal-transmitting assembly, low-voltage connecting wiring, and remote register assembly as required by utility company.
- E. Remote Registration System: Encoder type complying with AWWA C707; modified with signal-transmitting assembly, low-voltage connecting wiring, and remote register assembly as required by utility company.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install backflow preventers in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with NYC Plumbing Code 2014.
 - 1. Locate backflow preventers in same room as connected equipment or system.
 - 2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe-to-floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are unacceptable for this application.
 - 3. Do not install bypass piping around backflow preventers.
- B. Install water regulators with inlet and outlet shutoff valves and bypass with memory-stop balancing valve. Install pressure gages on inlet and outlet.
- C. Install water-control valves with inlet and outlet shutoff valves and bypass with globe valve. Install pressure gages on inlet and outlet.
- D. Install balancing valves in locations where they can easily be adjusted.
- E. Install temperature-actuated, water mixing valves with check stops or shutoff valves on inlets and with shutoff valve on outlet.
 - 1. Install cabinet-type units recessed in or surface mounted on wall as specified.
- F. Install Y-pattern strainers for water on supply side of each control valve and water pressure-reducing valve.
- G. Install outlet boxes recessed in wall or surface mounted on wall. Install 2-by-4-inch (38-by-89-mm) fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."



- H. Install hose stations with check stops or shutoff valves on inlets and with thermometer on outlet.
 - 1. Install cabinet-type units recessed in or surface mounted on wall as specified. Install 2-by-4-inch (38-by-89-mm) fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."
- I. Set nonfreeze, nondraining-type post hydrants in concrete or pavement.
- J. Set freeze-resistant yard hydrants with riser pipe in concrete or pavement. Do not encase canister in concrete.
- K. Install water-hammer arresters in water piping according to PDI-WH 201.
- L. Install air vents at high points of water piping.
- M. Install supply-type, trap-seal primer valves with outlet piping pitched down toward drain trap a minimum of 1 percent, and connect to floor-drain body, trap, or inlet fitting. Adjust valve for proper flow.
- N. Install drainage-type, trap-seal primer valves as lavatory trap with outlet piping pitched down toward drain trap a minimum of 1 percent, and connect to floor-drain body, trap, or inlet fitting.
- O. Install trap-seal primer systems with outlet piping pitched down toward drain trap a minimum of 1 percent, and connect to floor-drain body, trap, or inlet fitting. Adjust system for proper flow.

3.3 CONNECTIONS

- A. Comply with requirements for ground equipment in Section 260526 "Grounding and Bonding for Electrical Systems."
- B. Fire-retardant-treated-wood blocking is specified in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for electrical connections.

3.4 LABELING AND IDENTIFYING

- A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
 - 1. Pressure vacuum breakers.
 - 2. Intermediate atmospheric-vent backflow preventers.
 - 3. Reduced-pressure-principle backflow preventers.
 - 4. Double-check, backflow-prevention assemblies.
 - 5. Dual-check-valve backflow preventers.
 - 6. Reduced-pressure-detector, fire-protection, backflow-preventer assemblies.
 - 7. Double-check, detector-assembly backflow preventers.



8. Water pressure-reducing valves.
9. Manifold, thermostatic, water mixing-valve assemblies.
10. Primary water tempering valves.
11. Outlet boxes.
12. Hose stations.
13. Supply-type, trap-seal primer valves.
14. Trap-seal primer systems.

- B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.5 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:

1. Test each pressure vacuum breaker, reduced-pressure-principle backflow preventer, double-check, backflow-prevention assembly and double-check, detector-assembly backflow preventer according to NYC Plumbing Code 2014 and the device's reference standard.

- B. Domestic water piping specialties will be considered defective if they do not pass tests and inspections.

- C. Prepare test and inspection reports.

3.6 ADJUSTING

- A. Set field-adjustable pressure set points of water pressure-reducing valves.

- B. Set field-adjustable flow set points of balancing valves.

- C. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.

END OF SECTION 22 11 19



SECTION 22 13 16 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Pipe, tube, and fittings.
 - 2. Specialty pipe fittings.
 - 3. Encasement for underground metal piping.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 PERFORMANCE REQUIREMENTS

- A. Components and installation will be capable of withstanding the following minimum working pressure unless otherwise indicated:
 - 1. Soil, Waste, and Vent Piping: 10-foot head of water (30 kPa).
 - 2. Waste, Force-Main Piping: 150 psig (1035 kPa).
- B. Seismic Performance: Soil, waste, and vent piping and support and installation will withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For sovent drainage system. Include plans, elevations, sections, and details.

1.6 INFORMATIONAL SUBMITTALS

- A. Seismic Qualification Certificates: For waste and vent piping, accessories, and components, from manufacturer.



1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Detailed description of piping anchorage devices on which the certification is based and their installation requirements.

B. Field quality-control reports.

1.7 QUALITY ASSURANCE

A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

B. Piping materials will bear label, stamp, or other markings of specified testing agency.

C. Comply with NSF/ANSI 14, "Plastics Piping Systems Components and Related Materials," for plastic piping components. Include marking with "NSF-dwv" for plastic drain, waste, and vent piping and "NSF-sewer" for plastic sewer piping.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.2 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings: ASTM A 74, Service.

B. Gaskets: ASTM C 564, rubber.

C. Calking Materials: ASTM B 29, pure lead and oakum or hemp fiber.

2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

A. Pipe and Fittings: ASTM A 888 or CISPI 301.

B. CISPI, Hubless-Piping Couplings:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- a. ANACO-Husky.
- b. Dallas Specialty & Mfg. Co.
- c. Fernco Inc.
- d. Matco-Norca, Inc.
- e. MIFAB, Inc.
- f. Mission Rubber Company; a division of MCP Industries, Inc.
- g. Stant.
- h. Tyler Pipe.



- i. Or approved equal.
 2. Standards: ASTM C 1277 and CISPI 310.
 3. Description: Stainless-steel corrugated shield with stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve with integral, center pipe stop.
- C. Heavy-Duty, Hubless-Piping Couplings:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. ANACO-Husky.
 - b. Clamp-All Corp.
 - c. Dallas Specialty & Mfg. Co.
 - d. MIFAB, Inc.
 - e. Mission Rubber Company; a division of MCP Industries, Inc.
 - f. Stant.
 - g. Tyler Pipe.
 - h. Or approved equal.
 2. Standards: ASTM C 1277 and ASTM C 1540.
 3. Description: Stainless-steel shield with stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve with integral, center pipe stop.
- D. Cast-Iron, Hubless-Piping Couplings:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. MG Piping Products Company.
 - b. ClampAll
 - c. Tyler
 - d. Or approved equal.
 2. Standard: ASTM C 1277.
 3. Description: Two-piece ASTM A 48/A 48M, cast-iron housing; stainless-steel bolts and nuts; and ASTM C 564, rubber sleeve with integral, center pipe stop.

2.4 SPECIALTY PIPE FITTINGS

A. Transition Couplings:

1. General Requirements: Fitting or device for joining piping with small differences in OD's or of different materials. Include end connections same size as and compatible with pipes to be joined.
2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.



3. Unshielded, Nonpressure Transition Couplings:
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Dallas Specialty & Mfg. Co.
 - 2) Fernco Inc.
 - 3) Mission Rubber Company; a division of MCP Industries, Inc.
 - 4) Plastic Oddities; a division of Diverse Corporate Technologies, Inc.
 - 5) Or approved equal.
 - b. Standard: ASTM C 1173.
 - c. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
 - d. Sleeve Materials:
 - 1) For Cast-Iron Soil Pipes: ASTM C 564, rubber.
 - 2) For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
 - 3) For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.
4. Shielded, Nonpressure Transition Couplings:
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Cascade Waterworks Mfg. Co.
 - 2) Mission Rubber Company; a division of MCP Industries, Inc.
 - 3) Fernco.
 - 4) Or approved equal.
 - b. Standard: ASTM C 1460.
 - c. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.
5. Pressure Transition Couplings:
 - a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Cascade Waterworks Mfg. Co.
 - 2) Dresser, Inc.
 - 3) EBAA Iron, Inc.
 - 4) JCM Industries, Inc.
 - 5) Romac Industries, Inc.
 - 6) Smith-Blair, Inc.; a Sensus company.
 - 7) The Ford Meter Box Company, Inc.
 - 8) Viking Johnson.



9) Or approved equal.

- b. Standard: AWWA C219.
- c. Description: Metal, sleeve-type same size as, with pressure rating at least equal to, and ends compatible with, pipes to be joined.
- d. Center-Sleeve Material: Ductile iron.
- e. Gasket Material: Natural or synthetic rubber.
- f. Metal Component Finish: Corrosion-resistant coating or material.

B. Dielectric Fittings:

1. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.

2. Dielectric Unions:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1) Capitol Manufacturing Company.
- 2) Central Plastics Company.
- 3) Hart Industries International, Inc.
- 4) Jomar International Ltd.
- 5) Matco-Norca, Inc.
- 6) McDonald, A. Y. Mfg. Co.
- 7) Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- 8) Wilkins; a Zurn company.
- 9) Or approved equal.

b. Description:

- 1) Standard: ASSE 1079.
- 2) Pressure Rating: 125 psig (860 kPa) minimum at 180 deg F (82 deg C).
- 3) End Connections: Solder-joint copper alloy and threaded ferrous.

3. Dielectric Flanges:

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1) Capitol Manufacturing Company.
- 2) Central Plastics Company.
- 3) Matco-Norca, Inc.
- 4) Watts Regulator Co.; a division of Watts Water Technologies, Inc.
- 5) Wilkins; a Zurn company.
- 6) Or approved equal.

b. Description:



- 1) Standard: ASSE 1079.
 - 2) Factory-fabricated, bolted, companion-flange assembly.
 - 3) Pressure Rating: 125 psig (860 kPa) minimum at 180 deg F (82 deg C).
 - 4) End Connections: Solder-joint copper alloy and threaded ferrous; threaded solder-joint copper alloy and threaded ferrous.
4. Dielectric-Flange Insulating Kits:
- a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Advance Products & Systems, Inc.
 - 2) Calpico, Inc.
 - 3) Central Plastics Company.
 - 4) Pipeline Seal and Insulator, Inc.
 - 5) Or approved equal
 - b. Description:
 - 1) Nonconducting materials for field assembly of companion flanges.
 - 2) Pressure Rating: 150 psig (1035 kPa).
 - 3) Gasket: Neoprene or phenolic.
 - 4) Bolt Sleeves: Phenolic or polyethylene.
 - 5) Washers: Phenolic with steel backing washers.
5. Dielectric Nipples:
- a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Elster Perfection.
 - 2) Grinnell Mechanical Products.
 - 3) Matco-Norca, Inc.
 - 4) Precision Plumbing Products, Inc.
 - 5) Victaulic Company.
 - 6) Or approved equal.
 - b. Description:
 - 1) Standard: IAPMO PS 66
 - 2) Electroplated steel nipple.
 - 3) Pressure Rating: 300 psig (2070 kPa) at 225 deg F (107 deg C).
 - 4) End Connections: Male threaded or grooved.
 - 5) Lining: Inert and noncorrosive, propylene.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at indicated slopes.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation.
- J. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn, double Y-branch and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- K. Lay buried building drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- L. Install soil and waste drainage and vent piping at the following minimum slopes unless otherwise indicated:
 - 1. Building Sanitary Drain: 2 NPS 3 (DN 80) and smaller; 2 percent downward in direction of flow for piping NPS 4 (DN 100) and larger.



2. Horizontal Sanitary Drainage Piping: 2 percent downward in direction of flow.
 3. Vent Piping: 1 percent down toward vertical fixture vent or toward vent stack.
- M. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
1. Install encasement on underground piping according to ASTM A 674 or AWWA C105/A 21.5.
- N. Install steel piping according to NYC Plumbing Code 2014.
- O. Install engineered soil and waste drainage and vent piping systems as follows:
1. Combination Waste and Vent: Comply with standards of NYC Plumbing Code 2014.
 2. Solvent Drainage System: Comply with ASSE 1043 and solvent fitting manufacturer's written installation instructions.
 3. Reduced-Size Venting: Comply with standards of NYC Plumbing Code 2014.
- P. Install underground, ductile-iron, force-main piping according to AWWA C600. Install buried piping inside building between wall and floor penetrations and connection to sanitary sewer piping outside building with restrained joints. Anchor pipe to wall or floor. Install thrust-block supports at vertical and horizontal offsets.
1. Install encasement on piping according to ASTM A 674 or AWWA C105/A 21.5.
- Q. Install underground, copper, force-main tubing according to CDA's "Copper Tube Handbook."
1. Install encasement on piping according to ASTM A 674 or AWWA C105/A 21.5.
- R. Install force mains at elevations indicated.
- S. Plumbing Specialties:
1. Install backwater valves in sanitary waster gravity-flow piping. Comply with requirements for backwater valves according to NYC Plumbing Code 2014.
 2. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary drainage gravity-flow piping. Install cleanout fitting with closure plug inside the building in sanitary drainage force-main piping. Comply with requirements for cleanouts according to NYC Plumbing Code 2014.
 3. Install drains in sanitary drainage gravity-flow piping. Comply with requirements for drains according to NYC Plumbing Code 2014.
- T. Do not enclose, cover, or put piping into operation until it is inspected and approved by the Commissioner.
- U. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

- V. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- W. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

- A. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
- B. Join hub-and-spigot, cast-iron soil piping with calked joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead-and-oakum calked joints.
- C. Join hubless, cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.
- D. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is specified.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged. Do not use pipe sections that have cracked or open welds.
- E. Join stainless-steel pipe and fittings with gaskets according to ASME A112.3.1.
- F. Join copper tube and fittings with soldered joints according to ASTM B 828. Use ASTM B 813, water-flushable, lead-free flux and ASTM B 32, lead-free-alloy solder.
- G. Grooved Joints: Cut groove ends of pipe according to AWWA C606. Lubricate and install gasket over ends of pipes or pipe and fitting. Install coupling housing sections, over gasket, with keys seated in piping grooves. Install and tighten housing bolts.
- H. Flanged Joints: Align bolt holes. Select appropriate gasket material, size, type, and thickness. Install gasket concentrically positioned. Use suitable lubricants on bolt threads. Torque bolts in cross pattern.

3.4 SPECIALTY PIPE FITTING INSTALLATION

- A. Transition Couplings:
 - 1. Install transition couplings at joints of piping with small differences in OD's.
 - 2. In Drainage Piping: Shielded, nonpressure transition couplings.
 - 3. In Aboveground Force Main Piping: Fitting-type transition couplings.
 - 4. In Underground Force Main Piping:



- a. NPS 1-1/2 (DN 40) and Smaller: Fitting-type transition couplings.
- b. NPS 2 (DN 50) and Larger: Pressure transition couplings.

B. Dielectric Fittings:

1. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.
2. Dielectric Fittings for NPS 2 (DN 50) and Smaller: Use dielectric unions.
3. Dielectric Fittings for NPS 2-1/2 to NPS 4 (DN 65 to DN 100): Use dielectric flanges.
4. Dielectric Fittings for NPS 5 (DN 125) and Larger: Use dielectric flange kits.

3.5 VALVE INSTALLATION

A. General valve installation requirements are specified in Section 220523 "General-Duty Valves for Plumbing Piping."

B. Shutoff Valves:

1. Install shutoff valve on each sewage pump discharge.
2. Install gate or full-port ball valve for piping NPS 2 (DN 50) and smaller.
3. Install gate valve for piping NPS 2-1/2 (DN 65) and larger.

C. Check Valves: Install swing check valve, between pump and shutoff valve, on each sewage pump discharge.

D. Backwater Valves: Install backwater valves in piping subject to backflow.

1. Horizontal Piping: Horizontal backwater valves. Use normally closed type unless otherwise indicated.
2. Floor Drains: Drain outlet backwater valves unless drain has integral backwater valve.
3. Install backwater valves in accessible locations.

3.6 HANGER AND SUPPORT INSTALLATION

A. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."

1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
2. Install stainless-steel pipe hangers for horizontal piping in corrosive environments.
3. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
4. Install stainless-steel pipe support clamps for vertical piping in corrosive environments.



5. Vertical Piping: MSS Type 8 or Type 42, clamps.
 6. Install individual, straight, horizontal piping runs:
 - a. 100 Feet (30 m) and Less: MSS Type 1, adjustable, steel clevis hangers.
 - b. Longer Than 100 Feet (30 m): MSS Type 43, adjustable roller hangers.
 - c. Longer Than 100 Feet (30 m) if Indicated: MSS Type 49, spring cushion rolls.
 7. Multiple, Straight, Horizontal Piping Runs 100 Feet (30 m) or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
 8. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Support horizontal piping and tubing within 12 inches (300 mm) of each fitting, valve, and coupling.
- C. Support vertical piping and tubing at base and at each floor.
- D. Rod diameter may be reduced one size for double-rod hangers, with 3/8-inch (10-mm) minimum rods.
- E. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
1. NPS 1-1/2 and NPS 2 (DN 40 and DN 50): 60 inches (1500 mm) with 3/8-inch (10-mm) rod.
 2. NPS 3 (DN 80): 60 inches (1500 mm) with 1/2-inch (13-mm) rod.
 3. NPS 4 and NPS 5 (DN 100 and DN 125): 60 inches (1500 mm) with 5/8-inch (16-mm) rod.
 4. NPS 6 and NPS 8 (DN 150 and DN 200): 60 inches (1500 mm) with 3/4-inch (19-mm) rod.
 5. NPS 10 and NPS 12 (DN 250 and DN 300): 60 inches (1500 mm) with 7/8-inch (22-mm) rod.
 6. Spacing for 10-foot (3-m) lengths may be increased to 10 feet (3 m). Spacing for fittings is limited to 60 inches (1500 mm).
- F. Install supports for vertical cast-iron soil piping every 15 feet (4.5 m).
- G. Install hangers for steel piping with the following maximum horizontal spacing and minimum rod diameters:
1. NPS 1-1/4 (DN 32): 84 inches (2100 mm) with 3/8-inch (10-mm) rod.
 2. NPS 1-1/2 (DN 40): 108 inches (2700 mm) with 3/8-inch (10-mm) rod.
 3. NPS 2 (DN 50): 10 feet (3 m) with 3/8-inch (10-mm) rod.
 4. NPS 2-1/2 (DN 65): 11 feet (3.4 m) with 1/2-inch (13-mm) rod.
 5. NPS 3 (DN 80): 12 feet (3.7 m) with 1/2-inch (13-mm) rod.



6. NPS 4 and NPS 5 (DN 100 and DN 125): 12 feet (3.7 m) with 5/8-inch (16-mm) rod.
7. NPS 6 and NPS 8 (DN 150 and DN 200): 12 feet (3.7 m) with 3/4-inch (19-mm) rod.
8. NPS 10 and NPS 12 (DN 250 and DN 300): 12 feet (3.7 m) with 7/8-inch (22-mm) rod.

H. Install supports for vertical steel piping every 15 feet (4.5 m).

3.7 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties.

B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.

C. Connect drainage and vent piping to the following:

1. Plumbing Fixtures: Connect drainage piping in sizes indicated, but not smaller than required by plumbing code.
2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by NYC Plumbing Code 2014.
3. Plumbing Specialties: Connect drainage and vent piping in sizes indicated, but not smaller than required by plumbing code.
4. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
5. Equipment: Connect drainage piping as indicated. Provide shutoff valve if indicated and union for each connection. Use flanges instead of unions for connections NPS 2-1/2 (DN 65) and larger.

D. Connect force-main piping to the following:

1. Sanitary Sewer: To exterior force main.
2. Sewage Pump: To sewage pump discharge.

E. Where installing piping adjacent to equipment, allow space for service and maintenance of equipment.

F. Make connections according to the following unless otherwise indicated:

1. Install unions, in piping NPS 2 (DN 50) and smaller, adjacent to each valve and at final connection to each piece of equipment.
2. Install flanges, in piping NPS 2-1/2 (DN 65) and larger, adjacent to flanged valves and at final connection to each piece of equipment.



3.8 IDENTIFICATION

- A. Identify exposed sanitary waste and vent piping. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.9 FIELD QUALITY CONTROL

- A. During installation, notify the Commissioner at least 24 hours before inspection must be made. Perform tests specified below in presence of the Commissioner.
 - 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
 - 2. Final Inspection: Arrange for final inspection by the Commissioner to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If the Commissioner finds that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed the Commissioner.
- D. Test sanitary drainage and vent piping according to procedures of the NYC Plumbing Code 2014 or, in absence of published procedures, as follows:
 - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired or restored. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
 - 2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
 - 3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping except outside leaders on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water (30 kPa). From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks.
 - 4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1-inch wg (250 Pa). Use U-tube or manometer inserted in trap of water closet to measure this pressure. Air pressure must remain constant without introducing additional air throughout period of inspection. Inspect plumbing fixture connections for gas and water leaks.
 - 5. Repair and restore leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
 - 6. Prepare reports for tests and required corrective action.



3.10 CLEANING AND PROTECTION

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.
- D. Exposed ABS and PVC Piping: Protect plumbing vents exposed to sunlight with two coats of water-based latex paint.

3.11 PIPING SCHEDULE

- A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.
- B. Aboveground, soil and waste piping NPS 4 and smaller will be any of the following:
 - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 - 2. Hubless, cast-iron soil pipe and fittings CISPI heavy-duty hubless-piping couplings; and coupled joints.
- C. Aboveground, soil and waste piping NPS 5 and larger will be any of the following:
 - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 - 2. Hubless, cast-iron soil pipe and fittings and solvent stack fittings; CISPI heavy-duty hubless-piping couplings; and coupled joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- D. Aboveground, vent piping NPS 4 and smaller will be any of the following:
 - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 - 2. Hubless, cast-iron soil pipe and fittings; heavy-duty hubless-piping couplings; and coupled joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- E. Aboveground, vent piping NPS 5 and larger will be any of the following:
 - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
 - 2. Hubless, cast-iron soil pipe and fittings; heavy-duty hubless-piping couplings; and coupled joints.
 - 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- F. Underground, soil, waste, and vent piping NPS 4 and smaller will be any of the following:



1. Extra heavy, cast-iron soil piping; gaskets; and gasketed calking materials; and calked joints.
 2. Hubless, cast-iron soil pipe and fittings; heavy-duty cast-iron hubless-piping couplings; and coupled joints.
 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- G. Underground, soil and waste piping NPS 5 and larger will be any of the following:
1. Extra heavy, cast-iron soil piping; gaskets; and gasketed
 2. Hubless, cast-iron soil pipe and fittings; heavy-duty cast-iron hubless-piping couplings; coupled joints.
 3. Dissimilar Pipe-Material Couplings: Shielded, nonpressure transition couplings.
- H. Aboveground sanitary-sewage force mains NPS 1-1/2 and NPS 2 will be any of the following:
1. Galvanized-steel pipe, pressure fittings, and threaded joints.
- I. Aboveground sanitary-sewage force mains NPS 2-1/2 to NPS 6 will be any of the following:
1. Galvanized-steel pipe, pressure fittings, and threaded joints.
 2. Grooved-end, galvanized-steel pipe; grooved-joint, galvanized-steel-pipe appurtenances; and grooved joints.
- J. Underground sanitary-sewage force mains NPS 4 and smaller will be any of the following:
1. Hardcopper tube, Type L (Type B); wrought-copper pressure fittings; and soldered joints.
 2. Ductile-iron, mechanical-joint piping and mechanical joints.
 3. Ductile-iron, push-on-joint piping and push-on joints.
 4. Ductile-iron, grooved-joint piping and grooved joints.
 5. Fitting-type transition coupling for piping smaller than NPS 1-1/2 (DN 40) and pressure transition coupling for NPS 1-1/2 (DN 40) and larger if dissimilar pipe materials.
- K. Underground sanitary-sewage force mains NPS 5 and larger will be any of the following:
1. Hard copper tube, Type L (Type B); wrought-copper pressure fittings; and soldered joints.
 2. Ductile-iron, mechanical-joint piping and mechanical joints.
 3. Ductile-iron, push-on-joint piping and push-on joints.
 4. Ductile-iron, grooved-joint piping and grooved joints.

5. Pressure transition couplings if dissimilar pipe materials.

END OF SECTION 22 13 16



SECTION 22 42 13.13 - COMMERCIAL WATER CLOSETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:

- 1. Water closets.
- 2. Flushometer valves.
- 3. Toilet seats.
- 4. Supports.

- B. Related Requirements:

- 1. Section 102113 "Toilet Compartments" for solid surface partitions.
- 2. Section 102813 "Toilet Accessories" for security toilet accessories for holding pens and public restroom areas.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 DEFINITIONS

- A. Effective Flush Volume: Average of two reduced flushes and one full flush per fixture.
- B. Remote Water Closet: Located more than 30 feet (9.1 m) from other drain line connections or fixture and where less than 1.5 drainage fixture units are upstream of the drain line connection.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for water closets.



2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

B. Shop Drawings: Include diagrams for power, signal, and control wiring.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For flushometer valves and electronic sensors to include in operation and maintenance manuals.

1.7 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 WALL-MOUNTED WATER CLOSETS

A. Water Closets (P1): Wall mounted, back spud.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. TOTO, CT708UVG#01
 - b. American Standard, AFWALL Millenium FloWise 1.28 GPF Flushometer Toilet System
 - c. Zurn, Z5615-BWL-AM 1.28 GPF
 - d. Or Approved Equal.
2. Bowl:
 - a. Standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.5.
 - b. Material: Vitreous china.
 - c. Type: Siphon jet.
 - d. Style: Flushometer valve.
 - e. Height: Standard.
 - f. Rim Contour: Elongated.
 - g. Water Consumption: 1.28 gal. (4.8 L) per flush.
 - h. Spud Size and Location: NPS 1-1/2 (DN 40); top.
3. Flushometer Valve: Integral.
4. Toilet Seat: Integral.
5. Support: Water closet carrier.
6. Water-Closet Mounting Height: Standard.

B. Water Closets (P6): Wall mounted, back spud.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Acorn, LR1449-EGE
 - b. Willoughby Industries, 4896 Series 49" Wide ADA Combination Unit



- c. Willoughby Industries, 396 Series 37" Wide ADA Combination Unit
 - d. Or Approved Equal.
2. Bowl:
 - a. Standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.5.
 - b. Material: Type 304 Stainless Steel
 - c. Type: Siphon jet.
 - d. Style: Flushometer valve.
 - e. Height: Standard.
 - f. Rim Contour: Elongated.
 - g. Water Consumption: 1.6 gal. (6 L) per flush.
 - h. Spud Size and Location: NPS 1-1/2 (DN 40); back.
3. Flushometer Valve: Integral.
4. Toilet Seat: Integral.
5. Support: Water closet carrier.
6. Water-Closet Mounting Height: accessible/elderly according to ICC A117.1-2009.

C. Water Closets (P11): Wall mounted, back spud.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Acorn, 1696
 - b. Sloan, 304 Stainless Steel Blowout Flex-Flush
 - c. Acorn, R2105
 - d. Or Approved Equal.
2. Bowl:
 - a. Standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.5.
 - b. Material: Type 304 Stainless Steel
 - c. Type: Siphon jet.
 - d. Style: Flushometer valve.
 - e. Height: Standard.
 - f. Rim Contour: Elongated.
 - h. Water Consumption: 1.6 gal. (6 L) per flush.
 - i. Spud Size and Location: NPS 1-1/2 (DN 40); back.
3. Flushometer Valve: Integral.
4. Toilet Seat: Integral.
5. Support: Water closet carrier.
6. Water-Closet Mounting Height: Standard.

2.2 FLUSHOMETER VALVES

A. Hard-Wired, Solenoid-Actuator, Piston Flushometer Valves (P19):

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Toto, TET3GA
 - b. American Standard, 6065.161.002
 - c. Sloan, ECOS 111-1.6/1.1 Hardwire Dual Flush



- d. Or Approved Equal.
2. Standard: ASSE 1037.
3. Minimum Pressure Rating: 125 psig (860 kPa).
4. Features: Include integral check stop and backflow-prevention device.
5. Material: Brass body with corrosion-resistant components.
6. Exposed Flushometer-Valve Finish: Chrome plated.
7. Panel Finish: Chrome plated or stainless steel.
8. Style: Concealed.
9. Actuator: Solenoid complying with UL 1951, and listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
10. Trip Mechanism: Hard-wired electronic sensor complying with UL 1951, and listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
11. Consumption: 1.6 gal. (6 L) per flush.
12. Minimum Inlet: NPS 1 (DN 25).
13. Minimum Outlet: NPS 1-1/4 (DN 32).

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before water-closet installation.
- B. Examine walls and floors for suitable conditions where water closets will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

A. Water-Closet Installation:

1. Install level and plumb according to roughing-in drawings.
2. Install floor-mounted water closets on bowl-to-drain connecting fitting attachments to piping or building substrate.
3. Install accessible, wall-mounted water closets at mounting height for accessible/elderly, according to ICC/A117.1-2009.

B. Support Installation:

1. Install supports, affixed to building substrate, for floor-mounted, back-outlet water closets.
2. Use carrier supports with waste-fitting assembly and seal.



3. Install floor-mounted, back-outlet water closets attached to building floor substrate, onto waste-fitting seals; and attach to support.
4. Install wall-mounted, back-outlet water-closet supports with waste-fitting assembly and waste-fitting seals; and affix to building substrate.

C. Flushometer-Valve Installation:

1. Install flushometer-valve, water-supply fitting on each supply to each water closet.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
3. Install lever-handle flushometer valves for accessible water closets with handle mounted on open side of water closet.
4. Install actuators in locations that are easy for people with disabilities to reach.
5. Install fresh batteries in battery-powered, electronic-sensor mechanisms.

D. Install toilet seats on water closets.

E. Wall Flange and Escutcheon Installation:

1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations and within cabinets and millwork.
2. Install deep-pattern escutcheons if required to conceal protruding fittings.
3. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

F. Joint Sealing:

1. Seal joints between water closets and walls and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to water-closet color.
3. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.4 CONNECTIONS

- A. Connect water closets with water supplies and soil, waste, and vent piping. Use size fittings required to match water closets.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to water closets, allow space for service and maintenance.

3.5 ADJUSTING

- A. Operate and adjust water closets and controls. Replace damaged and malfunctioning water closets, fittings, and controls.

- B. Adjust water pressure at flushometer valves to produce proper flow.
- C. Install fresh batteries in battery-powered, electronic-sensor mechanisms.

3.6 CLEANING AND PROTECTION

- A. Clean water closets and fittings with manufacturers' recommended cleaning methods and materials.
- B. Install protective covering for installed water closets and fittings.
- C. Do not allow use of water closets for temporary facilities unless approved in writing by Commissioner.

END OF SECTION 22 42 13.13

SECTION 22 42 13.16 - COMMERCIAL URINALS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 013300 "Submittal Procedures."

1.3 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 014000 "Quality Requirements."

PART 2 - PRODUCTS

2.1 WALL-MOUNTED URINALS

- A. Urinals (P3): Wall mounted.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. TOTO, UT105UG#01
 - b. American Standard, 6590.503
 - c. TOTO, UT447E(V)
 - d. Or Approved Equal.
 - 2. Bowl:
 - a. Standards: ASME A112.19.2/CSA B45.1 and ASME A112.19.5.
 - b. Material: Vitreous china.
 - c. Type: Siphon jet.
 - d. Style: Flush valve.
 - e. Height: Standard.
 - f. Water Consumption: 0.125 gal. per flush.
 - 3. Flush Valve: Integral.
 - 4. Mounting Height: Standard.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before urinal installation.
- B. Examine walls and floors for suitable conditions where urinals will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

A. Urinal Installation:

1. Install urinals level and plumb according to rough-in drawings.
2. Install wall-hung, back-outlet urinals onto waste fitting seals and attached to supports.
3. Install wall-hung, bottom-outlet urinals with tubular waste piping attached to supports.
4. Install accessible, wall-mounted urinals at mounting height for the accessible/elderly, according to ICC A117.1-2009.
5. Install trap-seal liquid in waterless urinals.

B. Support Installation:

1. Install supports, affixed to building substrate, for wall-hung urinals.
2. Use off-floor carriers with waste fitting and seal for back-outlet urinals.
3. Use carriers without waste fitting for urinals with tubular waste piping.
4. Use chair-type carrier supports with rectangular steel uprights for accessible urinals.

C. Flushometer-Valve Installation:

1. Install flushometer-valve water-supply fitting on each supply to each urinal.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
3. Install lever-handle flushometer valves for accessible urinals with handle mounted on open side of compartment.
4. Install fresh batteries in battery-powered, electronic-sensor mechanisms.

D. Wall Flange and Escutcheon Installation:

1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations.
2. Install deep-pattern escutcheons if required to conceal protruding fittings.
3. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."

E. Joint Sealing:

1. Seal joints between urinals and walls and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to urinal color.
3. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.4 PIPING CONNECTIONS

- A. Connect urinals with water supplies and soil, waste, and vent piping. Use size fittings required to match urinals.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to urinals, allow space for service and maintenance.

3.5 ADJUSTING

- A. Operate and adjust urinals and controls. Replace damaged and malfunctioning urinals, fittings, and controls.
- B. Adjust water pressure at flushometer valves to produce proper flow.
- C. Install fresh batteries in battery-powered, electronic-sensor mechanisms.

3.6 CLEANING AND PROTECTION

- A. Clean urinals and fittings with manufacturers' recommended cleaning methods and materials.
- B. Install protective covering for installed urinals and fittings.
- C. Do not allow use of urinals for temporary facilities unless approved in writing by Commissioner.

END OF SECTION 22 42 13.16

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 42 16.13 - COMMERCIAL LAVATORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Lavatories.
 - 2. Faucets.
 - 3. Supply fittings.
 - 4. Waste fittings.
 - 5. Supports.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for lavatories.
 - 2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.
- B. Shop Drawings: Include diagrams for power, signal, and control wiring of automatic faucets.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.



1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For lavatories and faucets to include in operation and maintenance manuals.
 - 1. In addition to items specified in the DDC General Conditions, include the following:
 - a. Servicing and adjustments of automatic faucets.

1.7 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.

PART 2 - PRODUCTS

2.1 VITREOUS-CHINA, WALL-MOUNTED LAVATORIES

- A. Lavatory (P6): Wheelchair, stainless steel, wall mounted.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Acorn, LR1449-EGE
 - b. Willoughby Industries, 4896 Series 49” Wide ADA Combination Unit
 - c. Willoughby Industries, 396 Series 37” Wide ADA Combination Unit
 - d. Or Approved Equal.
 - 2. Fixture:
 - a. Standard: ASME A112.19.2/CSA B45.1.
 - b. Type: Wheelchair.
 - c. Nominal Size: Rectangular, 15.25 by 12.5 inches (542 by 318 mm).
 - d. Faucet-Hole Punching: 1.5-inch (38-mm) centers.
 - e. Faucet-Hole Location: Top.
 - f. Color: White.
 - g. Mounting: For concealed-arm carrier.
 - 3. Faucet: Integral to faucet
 - 4. Support: Type II, concealed-arm lavatory carrier.
 - 5. Lavatory Mounting Height: Accessible/elderly according to ICC A117.1-2009.

2.2 SOLID-BRASS, AUTOMATICALLY OPERATED LAVATORY FAUCETS

- A. NSF Standard: Comply with NSF 372 for faucet materials that will be in contact with potable water.
- B. Lavatory Faucets (P13): Automatic-type, hard-wired, electronic-sensor-operated, mixing, solid-brass valve.
 - 1. Products: Subject to compliance with requirements, provide one of the following:



- a. TOTO, TEL131D10E
 - b. American Standard, 605B.202
 - c. American Standard, 605B.163
 - d. Or approved equal.
2. Standards: ASME A112.18.1/CSA B125.1 and UL 1951.
 3. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 4. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and fixture receptor.
 5. Body Type: Single hole.
 6. Body Material: Commercial solid brass.
 7. Finish: Polished chrome plate.
 8. Maximum Flow Rate: 1.0 gpm (3.8 L/min.)
 9. Mounting Type: Back/wall, concealed.
 10. Spout: Rigid type.
 11. Spout Outlet: Aerator.
 12. Drain: Not part of faucet.

2.3 STAINLESS STEEL, AUTOMATICALLY OPERATED LAVATORY FAUCETS

- A. NSF Standard: Comply with NSF 372 for faucet materials that will be in contact with potable water.
- B. Lavatory Faucets (P2): Automatic-type, hard-wired, electronic-sensor-operated, mixing, solid-brass valve.
 1. Dyson Wash+Dry WD04
 - a. No substitutions permitted.
 2. Standards: ASME A112.18.1/CSA B125.1 and UL 1951.
 3. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 4. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and fixture receptor.
 5. Body Type: Single hole.
 6. Body Material: Stainless Steel.
 7. Maximum Flow Rate: 0.5 gpm (1.9 L/min.)
 8. Mounting Type: Back/wall, concealed.
 9. Spout: Rigid type.
 10. Spout Outlet: Aerator.
 11. Drain: Not part of faucet.

2.4 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF 372 for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.
- C. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless-steel wall flange.



- D. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Loose key.
- F. Risers:
 - 1. NPS 3/8 (DN 10).
 - 2. Chrome-plated, rigid-copper-pipe and brass straight or offset tailpieces.

2.5 WASTE FITTINGS

- A. Standard: ASME A112.18.2/CSA B125.2.
- B. Drain: Grid type with NPS 1-1/4 (DN 32) offset and straight tailpiece.
- C. Trap:
 - 1. Size: NPS 1-1/2 by NPS 1-1/4 (DN 40 by DN 32)
 - 2. Material: Chrome-plated, two-piece, cast-brass trap and swivel elbow with 0.032-inch- (0.83-mm-) thick brass tube to wall and chrome-plated, brass or steel wall flange.
 - 3. Material: Stainless-steel, two-piece trap and swivel elbow with 0.012-inch- (0.30-mm-) thick stainless-steel tube to wall; and stainless-steel wall flange.

2.6 SUPPORTS

- A. Type II Lavatory Carrier:
 - 1. Standard: ASME A112.6.1M.
- B. Type III Lavatory Carrier:
 - 1. Standard: ASME A112.6.1M.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before lavatory installation.



- B. Examine counters and walls for suitable conditions where lavatories will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

- A. Install lavatories level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-mounted lavatories.
- C. Install accessible wall-mounted lavatories at Accessible/elderly mounting height for people with disabilities or the elderly, according to the USDOJ's 2010 ADA Standards for Accessible Design and ICC A117.1-2009.
- D. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- E. Seal joints between lavatories, counters, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."
- F. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.4 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.5 ADJUSTING

- A. Operate and adjust lavatories and controls. Replace damaged and malfunctioning lavatories, fittings, and controls.
- B. Adjust water pressure at faucets to produce proper flow.
- C. Install fresh batteries in battery-powered, electronic-sensor mechanisms.



3.6 CLEANING AND PROTECTION

- A. After completing installation of lavatories, inspect and repair and restore damaged finishes.
- B. Clean lavatories, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed lavatories and fittings.
- D. Do not allow use of lavatories for temporary facilities unless approved in writing by Commissioner.

END OF SECTION 22 42 16.13



SECTION 224216.16 - COMMERCIAL SINKS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:

- 1. Service basins.
- 2. Service sinks.
- 3. Utility sinks.
- 4. Handwash sinks.
- 5. Sacristy sinks.
- 6. Sink faucets.
- 7. Laminar-flow, faucet-spout outlets.
- 8. Supports.
- 9. Supply fittings.
- 10. Waste fittings.

- B. Related Requirements:

- 1. Section 224216.13 "Commercial Lavatories."

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.

- 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for sinks.
- 2. Include rated capacities, operating characteristics, and furnished specialties and accessories.



1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.6 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For sinks to include in maintenance manuals.

1.7 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 SERVICE BASINS

- A. Service Basins (P15): Terrazzo, floor mounted.
 - 1. Formica Everform Vanity Bowl 1513
 - a. No substitutions permitted.
 - 2. Fixture:
 - a. Standard: IAPMO PS 99.
 - b. Shape: Rectangular.
 - c. Nominal Size: 15 by 16.75 inches (381 by 425 mm).
 - d. Height: 7 inches (178 mm).
 - e. Tiling Flange: Not required.
 - f. Rim Guard: On all top surfaces.
 - g. Color: White.
 - h. Drain: Grid with NPS 3 (DN 80) outlet.
 - 3. Mounting: Undermount.
 - 4. Faucet: Dyson W + Dry WD04 (P2)
 - a. No substitutions permitted.

2.2 SERVICE SINKS

- A. Service Sinks (P4): composite, trap standard mounted.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Proflo, PFMB3624S
 - b. Zurn, Z1996-24
 - c. American Standard, Florwell Service Sink
 - d. Or approved equal.
 - 2. Fixture:



- a. Standard: ASME A112.19.1/CSA B45.2.
 - b. Type: Service sink with back.
 - c. Back: Plain.
 - d. Nominal Size: 24 by 36 inches (610 by 915 mm).
 - e. Color: White.
 - f. Mounting: NPS 3 (DN 80) P-trap standard with grid strainer inlet, cleanout, and floor flange.
 - g. Rim Guard: On front and sides.
3. Faucet:
 - a. Acorn, KFC (P14).
 - b. American Standard, 8344.112
 - c. Delta Commercial, 28T9
 - d. Or approved equal.
 4. Support: Type II sink carrier.
 5. Lavatory Mounting Height: Standard.
- B. Service Sinks (P5): Precast Terrazzo, trap standard mounted.**
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Acorn, TNC-24-TF2
 - b. Fiat Products, TSBC1610
 - c. Fiat Products, TSB100
 - d. Or Approved Equal.
 2. Fixture:
 - a. Standard: ASME A112.19.1/CSA B45.2.
 - b. Type: Service sink with back.
 - c. Back: Plain.
 - d. Nominal Size: 24 by 24 inches (610 by 610 mm).
 - e. Color: N/A.
 - f. Mounting: NPS 3 (DN 80) P-trap standard with grid strainer inlet, cleanout, and floor flange.
 - g. Rim Guard: On front and sides.
 3. Faucet:
 - a. Acorn KFC (P14).
 - b. American Standard, 8344.112
 - c. Delta Commercial, 28T9
 - d. Or approved equal.
 4. Support: Type II sink carrier.
 5. Lavatory Mounting Height: Standard.
- C. Service Sinks (P7): Stainless Steel, trap standard mounted.**
1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Proflo PFMB2424S
 - b. Zurn, Z1996-24
 - c. American Standard, Florwell Service Sink
 - d. Or approved equal.
 2. Fixture:
 - a. Standard: ASME A112.19.1/CSA B45.2.



- b. Type: Service sink with back.
 - c. Back: Plain.
 - d. Nominal Size: 24 by 24 inches (610 by 610 mm).
 - e. Color: White.
 - f. Mounting: NPS 3 (DN 80) P-trap standard with grid strainer inlet, cleanout, and floor flange.
 - g. Rim Guard: On front and sides.
3. Faucet:
 - a. Acorn KFC (P14).
 - b. American Standard, 8344.112
 - c. Delta Commercial, 28T9
 - d. Or approved equal.
 4. Support: Type II sink carrier.
 5. Lavatory Mounting Height: Standard.

2.3 SINK FAUCETS

- A. NSF Standard: Comply with NSF 372 for faucet-spout materials that will be in contact with potable water.
- B. Sink Faucets (P14): Manual type, two-lever-handle mixing valve.
 1. Commercial, Solid-Brass Faucets.
 - a. Acorn KFC.
 - b. American Standard, 8344.112
 - c. Delta Commercial, 28T9
 - d. Or approved equal.
 2. Standard: ASME A112.18.1/CSA B125.1.
 3. General: Include hot- and cold-water indicators; coordinate faucet inlets with supplies and fixture hole punchings; coordinate outlet with spout and sink receptor.
 4. Body Type: Centerset.
 5. Body Material: Commercial, solid brass.
 6. Finish: Chrome plated.
 7. Handle(s): Cross, four arm.
 8. Mounting Type: Back/wall, exposed.
 9. Spout Type: Rigid, solid brass with wall brace.
 10. Vacuum Breaker: Required for hose outlet.
 11. Spout Outlet: Hose thread according to ASME B1.20.7.

2.4 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF 372 for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.



- C. Supply Piping: Chrome-plated brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated brass or stainless-steel wall flange.
- D. Supply Stops: Chrome-plated brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Loose key.
- F. Risers:
 - 1. NPS 3/8 (DN 10).
 - 2. Chrome-plated, rigid-copper pipe.

2.5 WASTE FITTINGS

- A. Standard: ASME A112.18.2/CSA B125.2.
- B. Drain: Grid type with NPS 1-1/2 (DN 40) offset and straight tailpiece.
- C. Trap:
 - 1. Size: NPS 1-1/2 by NPS 1-1/4 (DN 40 by DN 32)
 - 2. Material: Chrome-plated, two-piece, cast-brass trap and swivel elbow with 0.032-inch- (0.83-mm-) thick brass tube to wall and chrome-plated brass or steel wall flange.
 - 3. Material: Stainless-steel, two-piece trap and swivel elbow with 0.012-inch- (0.30-mm-) thick stainless-steel tube to wall; and stainless-steel wall flange.

2.6 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.
- C. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.



3.2 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before sink installation.
- B. Examine walls, floors, and counters for suitable conditions where sinks will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

- A. Install sinks level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-hung sinks.
- C. Install accessible wall-mounted sinks at Accessible/elderly mounting height according to ICC/ANSI A117.1.
- D. Set floor-mounted sinks in leveling bed of cement grout.
- E. Install water-supply piping with stop on each supply to each sink faucet.
 - 1. Exception: Use ball or gate valves if supply stops are not specified with sink.
 - 2. Install stops in locations where they can be easily reached for operation.
- F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- G. Seal joints between sinks and counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."
- H. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible sinks. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

3.4 CONNECTIONS

- A. Connect sinks with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."



3.5 ADJUSTING

- A. Operate and adjust sinks and controls. Replace damaged and malfunctioning sinks, fittings, and controls.
- B. Adjust water pressure at faucets to produce proper flow.

3.6 CLEANING AND PROTECTION

- A. After completing installation of sinks, inspect and repair and restore damaged finishes.
- B. Clean sinks, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed sinks and fittings.
- D. Do not allow use of sinks for temporary facilities unless approved in writing by Commissioner.

END OF SECTION 22 42 16.16



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 22 47 13 - DRINKING FOUNTAINS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes drinking fountains and related components.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of drinking fountain.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
 - 2. Include operating characteristics, and furnished specialties and accessories.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For drinking fountains to include in maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 DRINKING FOUNTAINS

- A. Drinking Fountains (P9), (P10): Satin Bronze, Wall-Mounted.



1. Standards:
 - a. Comply with ASME A112.19.3/CSA B45.4.
 - b. Comply with NSF 61 Annex G.
2. Type Receptor: On horizontal support.
3. Receptor Shape: Round.
4. Back Panel: Satin bronze wall plate behind drinking fountain.
5. Bubblers: Two with adjustable stream regulator, located on deck.
6. Maximum water flow: 0.5 gpm.
7. Control: Push button.
8. Drain: Grid type with NPS 1-1/4 (DN 32) tailpiece.
9. Supply: NPS 3/8 (DN 10) with shutoff valve.
10. Waste Fitting: ASME A112.18.2/CSA B125.2, NPS 1-1/4 (DN 32) chrome-plated brass P-trap and waste.
11. Support: Type I water cooler carrier.
12. Drinking Fountain Mounting Height: Standard.
13. Non-Recessed, High/Low Drinking Fountain with Cane Apron in the color Satin Bronze.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine roughing-in for water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before fixture installation.
- B. Examine walls and floors for suitable conditions where fixtures will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

- A. Install fixtures level and plumb according to roughing-in drawings.
- B. Set pedestal drinking fountains on floor.
- C. Install recessed drinking fountains secured to wood blocking in wall construction.
- D. Install off-the-floor carrier supports, affixed to building substrate, for wall-mounted fixtures.



- E. Install water-supply piping with shutoff valve on supply to each fixture to be connected to domestic-water distribution piping. Use ball or gate valve. Install valves in locations where they can be easily reached for operation.
- F. Install trap and waste piping on drain outlet of each fixture to be connected to sanitary drainage system.
- G. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons where required to conceal protruding fittings. Comply with escutcheon requirements specified in Section 220518 "Escutcheons for Plumbing Piping."
- H. Seal joints between fixtures and walls using sanitary-type, one-part, mildew-resistant, silicone sealant. Match sealant color to fixture color. Comply with sealant requirements specified in Section 079200 "Joint Sealants."

3.4 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Install ball or gate shutoff valve on water supply to each fixture.
- D. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.5 ADJUSTING

- A. Adjust fixture flow regulators for proper flow and stream height.

3.6 CLEANING

- A. After installing fixtures, inspect unit. Remove paint splatters and other spots, dirt, and debris. Repair and restore damaged finish to match original finish.
- B. Clean fixtures, on completion of installation, according to manufacturer's written instructions.
- C. Provide protective covering for installed fixtures.
- D. Do not allow use of fixtures for temporary facilities unless approved in writing by Commissioner.

END OF SECTION 22 47 13

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 23 05 00 – COMMON WORK RESULTS FOR HVAC

PART 1- GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Design Criteria
 - 2. Reference Standards
 - 3. Definitions and Interpretations
 - 4. Codes, Permits and Inspections
 - 5. Submittals
 - 6. Quality Assurance
 - 7. Delivery, Storage and Handling
 - 8. Coordination
 - 9. Equipment installation requirements common to equipment sections.
 - 10. Painting and finishing.
 - 11. Supports and anchorages.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.



1.4 SCOPE OF WORK

- A. Provide all required labor, materials, tools, equipment and services necessary for the complete and safe installation and properly operating mechanical systems described and/or indicated herein or which may be reasonably implied as essential, whether mentioned in the Drawings and Specifications or not.
- B. Examine the complete set of the Contract Documents for the project in order to determine the extent of the Work required to be completed as part of this scope of work. Failure to examine the Contract Documents (all Divisions) will not relieve the Subcontractor of the responsibility to perform all work required for a complete, safe, fully operational and satisfactory installation.
- C. All equipment and material to be furnished and installed on this project will be UL or ETL listed, in conformity with the requirements of all latest New York City Mechanical and Building Codes and suitable for its intended use on this project.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. All equipment and accessories are to be the product of manufacturers regularly engaged in their manufacture. All items of one type will be the products of the same manufacturer.
- C. Furnish all equipment new and free from defects.
- D. All equipment and material to be furnished and installed on this project will be listed by Underwriters' Laboratories Inc. (UL) or ETL listed, in accordance with the requirements of the latest New York City Mechanical and Building Codes and suitable for its intended use on the project.
- E. Supply all equipment and accessories in complete compliance with and in accordance with the applicable standards listed in reference standards of this division and with all applicable national, state and local codes.
- F. Steel Support Welding: Qualify processes and operators according to AWS D1.1, "Structural Welding Code--Steel."
- G. Electrical Characteristics for Mechanical Equipment: Equipment of higher electrical characteristics may be furnished provided such proposed equipment is approved in writing and connecting electrical services, circuit breakers, and conduit sizes are appropriately modified. If minimum energy ratings or efficiencies are specified, equipment will comply with requirements.
- H. Products Criteria:
 - 1. All equipment furnished as part of the work will comply with the latest editions of all applicable state and municipal "energy codes." Provide certification from the equipment suppliers for all energy-consuming equipment that the equipment fully complies with these codes. Equipment submissions will not be accepted for review unless accompanied by such certification in writing.
 - 2. All equipment and materials will be new and without blemish or defect.



3. All equipment and materials will be free of asbestos.
 4. All insulation, duct lining, etc. will have a composite (insulation, facing and adhesive) fire and smoke hazard rating as tested by Procedure ASTM E84, NFPA 255 and UL 723 not exceeding:
 - a. Flame Spread 25
 - b. Smoke Developed 50
 5. Electrical equipment and materials will be products which will meet with the acceptance of the agency inspecting the electrical work. Where such acceptance is contingent upon having the products examined, tested and certified by Underwriters or other recognized testing laboratory, the product will be examined, tested and certified at no additional cost to the project. Where no specific indication as to the type or quality of materials or equipment is indicated, a first class standard article will be furnished.
 6. Substituted equipment or optional equipment where permitted and approved, must conform to space requirements. Any substituted equipment that cannot meet space requirements, whether or not, will be remove existing and install new at the Subcontractor’s expense. Any modifications of related systems as a result of substitutions will be made at the Subcontractor’s expense.
 7. Substitutions of Mechanical Equipment for that shown on the schedules or designated by model number in the specifications will not be considered if the item is not a regular catalogued item shown in the current catalog of the manufacturer.
- I. Manufacturer’s Recommendations: Where installation procedures of any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations will be furnished prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

1.6 DESIGN CRITERIA

- A. The following will be used as the basis for design and control of the various systems.

Outside Conditions		
	DRY BULB	WET BULB
Summer (New York City Energy Conservation Code)	89 °F	73 °F
Summer (Equipment Sizing)	95°F	75 F



Winter (New York City Energy Conservation Code)	13°F	--
--	------	----

Inside Conditions				
Occupancy	Summer		Winter	
	DB	RH	DB	RH
Mechanical Spaces	Ventilation Only	Ventilation Only	65°F	Uncontrolled (No Humidification)

Ventilation Rates				
Occupancy	Ventilation Rate – Minimum OA (Air Changes/ hr.)	All Air exhausted Directly to outdoors	Fume hood in Space	Comments
Mechanical Spaces	Ventilation Only	Yes	-	-

B. Outside Air Ventilation Rates (per NYC 2014 Mechanical Code)

1. Offices, demonstration of operation Room – 5 CFM/person in breathing zone + .06 CFM/sq.ft. in breathing zone.
2. Toilets – 70 CFM exhaust per water closet or urinal

C. Heating and Cooling Load

1. People – Offices
 - a. Sensible: 250 BTU/hr per person
 - b. Latent: 200 BTU/hr per person

1.7 REFERENCE STANDARDS

- A. Comply with the most recently revised versions of all applicable laws, rules, standards, regulations, codes and ordinances of Federal, New York State and New York City. Modifications required by the above said revisions will be made without additional cost to the City of New York.



- B. The entire installation and all equipment, materials and methods will comply with all applicable requirements of laws, codes, ordinances, legislations, etc. of all federal, state and New York City, whether indicated on the Contract Documents or not.
- C. Published specifications, standards, tests or recommendation of trade, industry or governmental agencies will apply to all work in all sections.

1.8 DEFINITIONS

- A. **Finished Spaces:** Spaces other than mechanical and electrical equipment rooms, furred spaces, pipe and duct chases, unheated spaces immediately below roof, spaces above ceilings, unexcavated spaces, crawlspaces, and tunnels.
- B. **Exposed, Interior Installations:** Exposed to view indoors. Examples include finished occupied spaces and mechanical equipment rooms.
- C. **Exposed, Exterior Installations:** Exposed to view outdoors or subject to outdoor ambient temperatures and weather conditions. Examples include rooftop locations.
- D. **Concealed, Interior Installations:** Concealed from view and protected from physical contact by the building occupants. Examples include above ceilings, within furred spaces, enclosures, trenches, crawl spaces and chases.
- E. **Concealed, Exterior Installations:** Concealed from view and protected from weather conditions and physical contact by building occupants but subject to outdoor ambient temperatures. Examples include installations within unheated shelters.
- F. **Certificate of Compliance:** A certification stating that materials and products meet specified standards or that work was done in compliance with approved construction documents.
- G. **Component:** An MEP component or element that is part of an MEP system within or without a building system.
- H. **Equipment:** Systems associated with ductwork, piping and conduit, also called components.
- I. **Inspection Certificate:** An identification applied on a product by an approved agency containing the name of the manufacturer, the function and performance characteristics, and the name and identification of an approved agency that indicates that the product or material has been inspected and evaluated by an approved agency.
- J. **Label:** An identification applied on a product by the manufacturer that contains the name of the manufacturer, the function and performance characteristics of the product or material, and the same and identification of an approved agency and that indicated that the representative sample of the product or materials has been tested and evaluated by an approved agency.



- K. Licensed Professional Commissioner: An independent, qualified, licensed Professional Commissioner having PE registration from the State where the project is located, with significant experience in the applicable field.
- L. Approved Agency: An established and recognized agency, or other qualified person, regularly engaged in conducting tests or furnishing inspection services, that is approved by the AHJ as being qualified for such purposes.

1.9 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to the project properly identified with names, model numbers, types, grades, compliance labels, and other information needed for identification.
- B. Deliver, store and handle all materials to keep clean and protected from damage.
- C. Equipment will be shipped with all listed items and control wiring factory installed unless specified otherwise herein and specifically noted on the submittals as a substitution.
- D. Ship materials and equipment in crated sections of sizes to permit passing through available spaces, where required. Store products in shipping containers and maintain in place until installation.
- E. Store products in shipping containers and maintain in place until installation.
- F. Protect equipment and other materials from damage after installed from construction debris and other damage.

1.10 PROTECTION AND CLEANING

- A. Store materials in a manner that will maintain an orderly clean appearance. If stored on-site in open or unprotected areas, all equipment and material will be kept off the ground by means of pallets or racks, and covered with tarpaulins.
- B. The inlet and discharge opening of all terminal units as well as the top and bottom of all ductwork and piping will be kept covered until all local plastering, parging, etc. is completed, and the units are ready to run.
- C. Equipment and material if left in the open and item to be removed during demolition phase will be remove existing and install new, apply new coating, or otherwise remove existing and install new at the discretion of the Commissioner. Equipment and material is subject to rejection and remove existing and install new if in the opinion of the Commissioner, or in the opinion of the manufacturer's engineering department, the equipment has deteriorated or been item to be removed during demolition phase to the extent that its immediate use is questionable, or that its normal life expectancy has been curtailed.
- D. During the erection, protect all ductwork, duct lining, insulation, piping, and equipment from damage and dirt. Cap the open top and bottom of all ductwork and piping installed. After completion of project, clean



the exterior and interior surface of all equipment included in this division of work including, but not limited to, concrete residue.

1.11 ACCESSIBILITY

- A. Install all work so that parts requiring periodic inspection, operation, servicing and remove existing and install new are readily accessible.
- B. Group concealed vales, expansion joints, controls, dampers, and equipment so as to be freely accessible through access doors.

1.12 SEQUENCING AND SCHEDULING

- A. Coordinate mechanical equipment installation with other building components.
- B. Arrange for chases, slots, and openings in building structure during progress of construction to allow for mechanical installations.
- C. Coordinate the installation of required supporting devices and other structural components as they are constructed.
- D. Sequence, coordinate, and integrate installations of mechanical materials and equipment for efficient flow of the Work. Coordinate installation of large equipment requiring positioning prior to closing in the building.
- E. Coordinate connection of electrical services.
- F. Coordinate connection of mechanical systems with exterior underground and overhead utilities and services. Comply with requirements of National Grid, ConEd, DEP and any Telephone or Cable company.
- G. Coordinate requirements for access panels and doors where mechanical items requiring access are concealed behind finished surfaces. Access panels and doors are specified in Section 08 31 13 "Access Doors and Frames".
- H. Coordinate installation of identifying devices after completing covering and painting where devices are applied to surfaces. Install identifying devices prior to installing acoustical ceilings.

1.13 ACCESS PANELS

- A. Access doors will be provided under the General construction work and coordinated with the mechanical trades.
- B. This trade is responsible for access door location, size and its accessibility to the equipment being served.
- C. Locate access panels to access valves, traps, control valves or devices, dampers, damper motors, etc. Access panels will be sized as necessary for ample access, or as indicated on drawings, but no smaller than 18" x



18" where devices are within easy reach of operator, and at least 24"x24" when operator must pass through opening in order to reach the devices.

- D. Access panels in fire rated walls or ceiling must be U.L. labeled for intended use. Access doors will be hinged flush type steel framed panel, 14 gauge minimum for frame, and with anchor straps. Only narrow border will be exposed. Hinges will be concealed type. Locking device will be flush type and screw driver operated. Metal surfaces will be prime coated with rust-inhibitive apply new coating.
- E. Panels will be compatible with architectural adjacent materials.

1.14 GUARANTEES AND CERTIFICATIONS

- A. All work will be guaranteed to be free from leaks or defects. Any defective materials or workmanship as well as damage to the work of all trades resulting from same will be remove existing and install new or remove existing and install new as directed for the duration of stipulated guaranteed periods.

1.15 DRIVE GUARDS

- A. For all machinery and equipment (whether factory fabricated or field installed) provide OSHA Approved guards for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor.
- B. Materials: Sheet steel, cast iron, expanded metal or heavy gauge wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.
- C. Access for Speed Measurement: One inch diameter hole at each shaft center.

1.16 FIRE-STOPPING

- A. Refer to Section; 078400 "FIRESTOPPING".
- B. The Mechanical trade is responsible for firestopping of mechanical work.
- C. Firestopping system must be U.L. approved.
- D. All spaces between ducts or pipes and their respective sleeves will be packed full depth with mineral wool, or other equally approved fire resistant material, and compressed firmly in place.
- E. Fiberglass will not be used. Sleeve clearances will not exceed ½ inch between pipes (or ducts) and sleeves. Use individual sleeves for each pipe or duct. Use escutcheons on both sides of sleeves. This includes spaces between ducts on pipes and their respective sleeves or opening at fan rooms (whether walls are fire rated or not).



1.17 TOOLS AND LUBRICANTS

- A. Furnish special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Lubricants: A minimum of one quart of oil and one pound of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

PART 2 - PRODUCTS

2.1 DIELECTRIC FITTINGS

- A. For all systems, provide dielectric fittings to isolate joined dissimilar materials to prevent galvanic action and stop corrosion. Fittings will be of the non reducing type, which will be suitable for the system fluid, pressure, and temperature and will not restrict the flow.
- B. For factory fabricated equipment, manufacturer will submit method of compliance or exceptions (if applicable) in writing as part of the shop drawings submission for review by Commissioner.
- C. It is the intent of this section that all system components (equipment connections, piping, etc.), whether they are field installed or factory fabricated, will comply with these requirements.
- D. Combination fitting of copper alloy and ferrous materials with threaded, solder-joint, plain and weld-neck end types that match piping system materials.
- E. Insulating Material: Suitable for system fluid, pressure, and temperature, does not restrict flow.
- F. Dielectric Unions: Factory-fabricated, union-assembly, for 300-psig minimum working pressure at 180 deg F.
 - 1. Manufacturers: Subject to compliance with requirements, provide product by one of the following:
 - a. Capital Manufacturing Co.
 - b. Central Plastics Company
 - c. Eclipse, Inc.
 - d. Epcos Sales, Inc.
 - e. Hart Industries, International, Inc.
 - f. Watts Industries, Inc.; Water Products Div.
 - g. Zurn Industries, Inc.; Wilkins Div.



- h. Or Approved Equal.
- G. Dielectric Flanges: Factory-fabricated, companion-flange assembly, for 300-psig (2070-kPa) minimum working pressure as required to suit system pressures.
- 1. Manufacturers: Subject to compliance with requirements, provide product by one of the following:
 - a. Capital Manufacturing Co.
 - b. Central Plastics Company.
 - c. Epcos Sales, Inc.
 - d. Watts Industries, Inc.; Water Products Div.
 - e. Or Approved Equal.
- H. Dielectric-Flange Kits: Companion-flange assembly for field assembly. Include flanges, full-face or ring-type neoprene or phenolic gasket, phenolic or polyethylene bolt sleeves, phenolic washers, and steel backing washers.
- 1. Manufacturers: Subject to compliance with requirements, provide product by one of the following:
 - a. Advance Products & Systems, Inc.
 - b. Calpico, Inc.
 - c. Central Plastics Company.
 - d. Pipeline Seal and Insulator, Inc.
 - e. Or Approved Equal.
 - 2. Separate companion flanges and steel bolts and nuts will have 300-psig minimum working pressure where required to suit system pressures.
- I. Dielectric Couplings: Galvanized-steel coupling with inert and noncorrosive, thermoplastic lining; threaded ends; and 300-psig (2070-kPa) minimum working pressure at 225 def F (107 deg C) temperature.
- 1. Manufacturers: Subject to compliance with requirements, provide product by one of the following:
 - a. Calpico, Inc.
 - b. Lochinvar Corp.
 - c. ProFlo.
 - d. Or Approved Equal.



- J. Dielectric Nipples: Electroplated steel nipple with inert and noncorrosive, thermoplastic lining; plain, threaded, or grooved ends; and 300-psig (2070-kPa) minimum working pressure at 225 deg F (107 deg C) temperature.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Perfection Corp.
 - b. Precision Plumbing Products, Inc.
 - c. Sioux Chief Manufacturing Co., Inc.
 - d. Or Approved Equal.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 MECHANICAL INSTALLATIONS

- A. General: Sequence, coordinate, and integrate the various elements of mechanical systems, materials, and equipment. Comply with the following requirements:
- B. Coordinate mechanical systems, equipment, and materials installation with other building components.
- C. Verify all dimensions by field measurements.
- D. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for mechanical installations.
- E. Coordinate the installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
- F. Sequence, coordinate, and integrate installations of mechanical materials and equipment for efficient flow of the Work. Give particular attention to large equipment requiring positioning prior to closing in the building.
- G. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide the maximum headroom possible.
- H. Coordinate connection of mechanical systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings, to



greatest extent possible. Conform to arrangements indicated by the Contract Documents, recognizing that portions of the Work are shown only in diagrammatic form.

- I. Where coordination requirements conflict with individual system requirements, refer conflict to the Commissioner.
- J. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components, where installed exposed in finished spaces.
- K. Install mechanical equipment to facilitate servicing, service by client agency, and remove existing and install new or remove existing and install new of equipment components. As much as practical, connect equipment for ease of disconnecting, with minimum of interference with other installations. Extend grease fittings to an accessible location
- L. Install access panel or doors for service by client agency or inspection where units are concealed behind finished surfaces. Access panels and doors are specified under another section of the work.
- M. Install systems, materials, and equipment giving right-of-way priority to systems required to be installed at a specified slope.

3.3 CUTTING AND PATCHING

- A. General: Perform cutting and construct or building in accordance with DDC General Conditions.
- B. Protection of Installed Work: During cutting and construct or building operations, protect adjacent installations.
- C. Perform cutting, fitting, and construct or building of mechanical equipment and materials required to:
 - 1. Uncover Work to provide for installation of ill-timed Work.
 - 2. Remove and remove existing and install new defective Work.
 - 3. Remove and remove existing and install new Work not conforming to requirements of the Contract Documents.
 - 4. Remove samples of installed Work as specified for testing.
 - 5. Install equipment and materials in existing structures.
 - 6. Upon written instructions from the Commissioner, uncover and remove existing and install new Work to provide for Commissioner observation of concealed Work.
- D. Cut, remove and legally dispose of selected mechanical equipment, components, and materials as indicated, including but not limited to removal of mechanical piping, heating units, plumbing fixtures and trim, and other mechanical items made obsolete by the new Work.
- E. Protect the structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.



- F. Provide and maintain temporary partitions or dust barriers adequate to prevent the spread of dust and dirt to adjacent areas.
- G. Construct or build existing finished surfaces and building components using new materials matching existing materials and experienced Installers. Installers' qualifications refer to the materials and methods required for the surface and building components being construct or built.

3.4 ROUGH IN

- A. Verify final locations for rough-ins with field measurements and with the requirements of the actual equipment to be connected.
- B. Refer to equipment specifications (under another Division) for rough-in requirements.

3.5 EQUIPMENT INSTALLATION--COMMON REQUIREMENTS

- A. Install equipment to provide the maximum possible headroom where mounting heights are not indicated.
- B. Install equipment according to approved submittal data. Portions of the Work are shown only in diagrammatic form. Refer conflicts to the Commissioner.
- C. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, except where otherwise indicated.
- D. Install mechanical equipment to facilitate servicing, service by client agency, and remove existing and install new or remove existing and install new of equipment components. Connect equipment for ease of disconnecting, with minimum of interference with other installations. Extend grease fittings to an accessible location.
- E. Install equipment giving right-of-way to piping systems installed at a required slope.
- F. Install equipment to provide the maximum possible headroom where mounting.

3.6 SUPPLEMENTARY STEEL, CHANNELS AND SUPPORTS:

- A. Furnish supplementary steel, channels and supports required for proper installation, mounting and support of HVAC work.
- B. Connect supplementary steel and channels firmly to building construction in an acceptable manner.
- C. Determine type and size of supporting channels and supplementary steel. Supplementary steel and channels will be of sufficient strength and size to allow only a minimum deflection in conformance with manufacturer's requirements of loading.



- D. Install supplementary steel and channels in a neat and workmanlike manner parallel to walls, floors, and ceiling construction.
- E. All supplementary steel, channels, supports will be submitted to Commissioner for review.

3.7 EXPANSION ANCHORS

- A. Provide smooth wall, non-self-drilling internal plug expansion type anchors constructed of AISC 12L14 steel and zinc plated in accordance with Fed. Spec. QQ-A-325 Type 1, Class 3.
- B. Provide spacing and install anchors in accordance with manufacturer's recommendations.

3.8 TOOLS AND LUBRICANTS

- A. Furnish special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Lubricants: A minimum of one quart of oil, and one pound of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

3.9 EQUIPMENT INSTALLATION - COMMON REQUIREMENTS

- A. Install equipment to allow maximum possible headroom unless specific mounting heights are not indicated.
- B. Install equipment level and plumb, parallel and perpendicular to other building systems and components in exposed interior spaces, unless otherwise indicated.
- C. Install HVAC equipment to facilitate service, and remove existing and install new or remove existing and install new of components. Connect equipment for ease of disconnecting, with minimum interference to other installations.
- D. Install equipment to allow right of way for piping installed at required slope.

3.10 PAINTING

- A. Painting of mechanical systems, equipment, and components is specified in Section 09 90 00 "Painting and Coating".
- B. Damage and Touchup: Remove existing and install new marred and item to be removed during demolition phase factory-apply new coating finishes with materials and procedures to match original factory finish.



3.11 ERECTION OF METAL SUPPORTS AND ANCHORAGES

- A. Refer to Division 5 Section "Metal Fabrications" for structural steel.
- B. Cut, fit, and place miscellaneous metal supports accurately in location, alignment, and elevation to support and anchor HVAC materials and equipment.
- C. Field Welding: Comply with AWS D1.1.

3.12 GROUTING

- A. Nonshrink, Nonmetallic Grout: ASTM C 1107, Grade B.
 - 1. Characteristics: Post-hardening, volume adjusting, dry, hydraulic-cement grout, nonstaining, noncorrosive, nongaseous and recommended for interior and exterior applications.
 - 2. Design mix: 6000 psi (34.5 MPa), 28 day compressive strength.
 - 3. Packaging: Premixed and factory packaged.
- B. Mix and install grout for HVAC equipment base bearing surfaces, pump and other equipment base plates, and anchors.
- C. Clean surfaces that will come into contact with grout.
- D. Provide forms as required for placement of grout.
- E. Avoid air entrapment during placement of grout.
- F. Place grout, completely filling equipment bases.
- G. Place grout on concrete bases and provide smooth bearing surface for equipment.
- H. Place grout around anchors.
- I. Cure placed grout.

3.13 REMOVALS AND ALTERATIONS

- A. Remove existing and install new, adjust, adapt and modify existing equipment and/or systems as required by the drawings or specifications and as may be required when such work is uncovered and found to interfere with the completion of work in this contract of other contract work.
- B. All removed equipment and material will be removed from the project site.



- C. Unless otherwise specifically specified, include all cutting and construct or building of existing floors, walls, partitions and other materials in the existing building. The Subcontractor will remove existing and install new these areas to original conditions.
- D. Provide alteration work as shown on drawings or described herein. If asbestos is present or suspected to be present, inform the Commissioner in writing. Do not commence demolition until such work has been completed.

END OF SECTION 230500



SECTION 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section includes
 - 1. Testing, Adjusting and Balancing of Air Systems:
 - a. Constant-volume air systems.
 - b. Variable-air-volume systems.
 - 2. Testing, Adjusting and Balancing of Hydronic Piping Systems:
 - a. Constant-flow hydronic systems.
 - b. Variable-flow hydronic systems.
 - 3. Leakage Testing, Air Distribution System
 - 4. Measurement of final operating conditions of HVAC Systems.
 - 5. Sound measurement of equipment operating conditions.
 - 6. Vibration measurement of equipment operating conditions.
 - 7. Measurement of the Indoor Air Quality (IAQ) after the completion of the final balancing.
- B. Testing, balancing and adjusting will in no way relieve the Contractor of the guarantee obligations.
- C. The Subcontractor will furnish all fuel, water and electricity required in performing the testing, balancing and adjusting of mechanical systems.
- D. Related Sections:
 - 1. Section 23 31 13 – Metal Ducts
 - 2. Section 23 05 00 – Common Work Results for HVAC

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions section 01 33 00 “Submittal Procedures”.

1.4 SCOPE OF WORK

- A. General:
 - 1. Testing, adjust and confirm design airflows, pressure drops, operating pressures, and temperatures for HVAC systems, including, but not limited to refrigerant system, steam system, outside ventilation air, supply air, return air, and exhaust air systems, including all associated coils, fans, dampers, diffusers, fan coil units, kitchen hoods, valves and accessories etc.
 - 2. Provide all necessary labor, materials, products, equipment and services to balance and test all HVAC systems, to verify conformance to specified quantities, and to the design of the mechanical system and for the testing of all the fire safety ventilations systems.



3. Cooperate with all other trades, including, but not limited to, (BMS) building controls, fire alarm, sheet metal and piping sub-Subcontractors to ensure the Work is carried out without interference to other Work.
 4. Provide openings required for pitot tube traverses. After balancing, close sheet metal openings with removable gasketed plugs. Submit samples of proposed plugs to the Commissioner for approval.
 5. Conduct regular inspections during the mechanical systems installation and report on ductwork installation (likely to produce abnormal leakage or restrictions to airflow), piping installation, proper placement of dampers or valves, and any circumstance which will encumber the testing and balancing of the mechanical systems.
 6. Review Drawings and Specifications prior to submitting and ensure that adequate provisions are made in the mechanical installation to facilitate the balancing of all air, steam and water systems; make written recommendations to the Commissioner where additional measures may be required.
 7. Include all items of labor, materials, products, equipment and devices required to comply with standards and codes of the New York City Mechanical and Building Code in accordance with the contract documents to balance all air and hydronic systems, to verify conformance to specified quantities and to the design of the mechanical system. Where quantities, sizes or other requirements indicated on the drawings or herein specified are in excess of the NYC Mechanical Code and Building Code requirements, the specifications and drawings must govern.
- B. All work related to the preparation of the systems will be the responsibility of the HVAC Subcontractor. No work will proceed on the Testing, Balancing and Adjusting until all items required to be completed prior to the start of Tab work outlined in this section are complete.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. TAB Subcontractor Qualifications: Engage a TAB entity certified by NEBB or TABB.
1. TAB Field Supervisor: Employee of the TAB subcontractor and certified by AABC, NEBB or TABB.
 2. TAB Technician: Employee of the TAB subcontractor and who is certified by AABC, NEBB or TABB as a TAB technician.

1.6 DEFINITIONS

- A. AABC: Associated Air Balance Council.
- B. NEBB: National Environmental Balancing Bureau.
- C. TAB: Testing, adjusting, and balancing.
- D. TABB: Testing, Adjusting, and Balancing Bureau.
- E. TAB Specialist: An entity engaged to perform TAB Work
- F. Systems testing, adjusting, and balancing is the process of checking and adjusting all the building environmental systems to produce the design objectives. It includes
1. The balance of air, and hydronic distribution systems.
 2. Adjustment of all systems to provide design quantities and pressures.



3. Verification of performance of all equipment and automatic controls;
4. Sound and vibration measurements.
5. Indoor Air Quality (IAQ) measurements

- G. Test: To determine quantitative performance of equipment.
- H. Adjust: To regulate the specified air and fluid flow rates and air patterns at the terminal equipment (e.g., reduce fan speed, throttling, diffuser directional vane adjustment, etc.).
- I. Balance: To proportion flows within the distribution system (submains, branches, and terminals) according to specified design quantities.
- J. Procedure: Standardized approach and execution of sequence of work operations to yield reproducible results.
- K. Report forms: Test data sheets arranged for collecting test data in logical order for submission and review. These data sheets should also form the permanent record to be used as the basis for required future testing, adjusting, and balancing.
- L. Terminal: The point where the controlled fluid enters or leaves the distribution system. These are supply inlets on water terminals, supply outlets on air terminals, return outlets on water terminals, and exhaust or return inlets on air terminals such as registers, grilles, diffusers, louvers, and hoods.
- M. Main: Duct or pipe containing the system's major or entire fluid flow.
- N. Submain: Duct or pipe containing part of the systems' capacity and serving two or more branch mains.
- O. Branch main: Duct serving two or more terminals.
- P. Branch: Duct serving a single terminal.
- Q. "Data Register": See description hereinafter.

1.7 REFERENCE STANDARDS

- A. All testing, balancing, and adjusting will be performed in accordance with the latest applicable industry standards, those standards referenced in the applicable Division 23 specifications, including the following:
1. Code for Design of Heating, Ventilation and Air Conditioning (GBJ 19-87, GB 50019-2003).
 2. Environmental Air Quality Standards GB 3095-96.
 3. NEEB Testing, Adjusting and Balancing model specifications
 4. NEBB "Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems"
 5. ASHRAE - Standard 111 - 1988 Practices for Measurement, Testing, Adjusting, and Balancing of Building Heating, Ventilation, Air Conditioning, and Refrigeration Systems.
 6. ASHRAE - 2003 HVAC Applications Handbook: Chapter 37, Testing, Adjusting and Balancing.
 7. SMACNA - HVAC System Testing, Adjusting and Balancing (TAB) and Certification of Testing, Adjusting and Balancing Technicians.
 8. SMACNA "HVAC Air Duct Leakage Test Manual", Second Edition, 2012.



- B. All equipment and material to be furnished and installed on this Project will be in accordance with the requirements of the latest New York City Mechanical and Building Code and suitable for its intended use on this Project.

1.8 SUBMITTALS

- A. Qualification Data: Within 15 days of Subcontractor's Notice to Proceed, submit documentation that the TAB subcontractor and this Project's TAB team members meet the qualifications specified in "Quality Assurance" Article.
- B. Contract Documents Examination Report: Within 30 days of Subcontractor's Notice to Proceed, submit the Contract Documents review report as specified in Part 3.
- C. Strategies and Procedures Plan: Within 60 days of Subcontractor's Notice to Proceed, submit TAB strategies and step-by-step procedures as specified in "Preparation" Article.
- D. Submittal data must include, but not be limited to:
 - 1. Air Balance Procedures, Recording Forms and Test Equipment.
 - 2. Air Balance Test Reports.
 - 3. Vibration and Alignment Readings.
 - 4. Sound Level Reading Test Equipment and Reporting Forms.
 - 5. Ductwork Leakage Test Data.
 - 6. Final Air Balance Readings.
- E. Certified TAB reports.
- F. Instrument calibration reports, to include the following:
 - 1. Instrument type and make.
 - 2. Serial number.
 - 3. Application.
 - 4. Dates of use.
 - 5. Dates of calibration.

1.9 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 014000 "Quality Requirements".
- B. Testing and Balancing Agency Qualifications:
 - 1. An independent testing, adjusting, and balancing agency meeting the qualifications specified below, to be the single source of responsibility to test, adjust, and balance the building mechanical systems identified above, to produce the design objectives. Services will include checking installations for conformity to design, measurement and establishment of the fluid quantities of the mechanical systems as required to meet design specifications, and recording and reporting the results.
 - 2. The independent testing, adjusting, and balancing agency will be qualified in those testing and balancing disciplines required for this project.
 - 3. The air and water balance agency will provide proof of having at least 3 years testing, adjusting and balancing experience, as well as having successfully completed projects of similar size and scope.



4. The work must be performed by a qualified Testing, Adjusting and Balancing Technician who may be assisted by other TAB Technicians. The Testing, Adjusting and Balancing Technician is responsible for:
 - a. Procedures to be followed
 - b. Accuracy of all testing
 - c. Integrity of recorded data
 - d. Entering all data and reporting any abnormal or notable conditions on the report forms
 - e. Initialing and dating each recorded data sheet
5. The General Section of the Balance Report will include the names, and signatures, of the Technicians who were assigned to the project.
6. Subcontractor's Quality Assurance Responsibilities: This Subcontractor is solely responsible for quality control of the Work.

C. IAQ Testing:

1. The Independent Testing, Adjusting and Balancing agency will test the building air systems identified above, to produce an IAQ report.
2. The testing and balancing agency, will provide IAQ testing will include checking installations for conformity to design, measurement and establishment of the fluid quantities of the mechanical systems as required to meet design specifications, and recording and reporting the results.

1.10 CONTRACTOR RESPONSIBILITIES

- A. Prepare each system for testing and balancing.
- B. Cooperate with the testing agencies, provide access to all work, equipment and systems. Operate individual equipment and systems as requested by the testing and balancing agency.
- C. Put all heating, ventilating and air conditioning systems and equipment into full operation and will continue the operation of same during each working day of testing and balancing. Operate systems and under conditions required for proper testing, adjusting, and balancing.
- D. Notify the Testing, Adjusting and Balancing Technician, and Commissioner two weeks prior to time system will be ready for testing, adjusting, and balancing. Project readiness will include:
 1. Systems are started and running (fans and pumps have been checked for proper rotation).
 2. Permanent electrical power wiring is complete.
 3. Verification that all ductwork is fabricated and installed as specified.
 4. Ceilings are installed in critical areas where diffuser air pattern adjustment may be required. Access to balancing devices is provided.
 5. All equipment and ductwork access doors are securely closed.
 6. A complete review of the subcontractor Combined Services Drawings (CSD) for coordination of the provisions for the TAB process and instrumentation needed.
 7. All balancing, smoke and fire/smoke dampers are installed and in full open positions.
 8. All isolation and balancing valves are open and control valves are operational.
 9. System installation is complete, with Controls and Instrumentation installed and fully operational.
 10. The Testing Agency will provide the necessary input in the form of recommendation, and engineering drawings to facilitate testing construction.
- E. Where fans (air handling units, supply fans, return fans, exhaust fans, etc.) are provided with variable pitch sheaves, adjust sheaves, as required, until desired Design Points (CFM and Static Pressure) are reached. If



adjustment of the variable pitch sheaves is beyond the range of the sheaves, remove existing and install new sheaves, as required, until the desired Design Flow Points (Static Pressure) are reached. Where fans (air handling, supply, return, exhaust, etc.) are specified with fixed ratio sheaves, provide a set of variable sheaves for initial adjustment and determination of proper RPM provide the proper fixed sheaves and remove existing and install new the variable sheaves and provide a final report verifying performance. This work will be at no additional cost to the City of New York.

- F. Contractor is responsible for the leakage testing of the duct work in conjunction with the Testing and Balancing Agency. Provide the required equipment and labor for testing. Provide any special instrumentation and record all data for submittal to the Commissioner. The Commissioner will be given two weeks prior notification of and be present during initial testing. Subsequent testing will be coordinated with and witnessed by the Commissioner.
- G. All duct work etc. that is found to exceed the permissible leakage rates will be immediately remove existing and install new at no additional cost to the City of New York and in a timely manner so as not to interfere with the progress of the work.

1.11 SEQUENCING AND SCHEDULING

- A. Sequencing work to commence after completion of systems and schedule completion of work before Substantial Completion of Project.
- B. TAB Conference: Meet with the Commissioner on approval of the TAB strategies and procedures plan to develop a mutual understanding of the details. Require the participation of the TAB field supervisor and technicians. Provide seven days' advance notice of scheduled meeting time and location.
 - 1. Agenda Items:
 - a. The Contract Documents examination report.
 - b. The TAB plan.
 - c. Coordination and cooperation of trades and subsubcontractors.
 - d. Coordination of documentation and communication flow.
- C. Certify TAB field data reports and perform the following:
 - 1. Review field data reports to validate accuracy of data and to prepare certified TAB reports.
 - 2. Certify that the TAB team complied with the approved TAB plan and the procedures specified and referenced in this Specification.
- D. TAB Report Forms: Use standard TAB subcontractor's forms approved by the Commissioner.
- E. Instrumentation Type, Quantity, Accuracy, and Calibration: As described in ASHRAE 111, Section 5, "Instrumentation."

1.12 DRAWING AND CONSTRUCTION REVIEW

- A. Perform a preconstruction review of the following documents:
 - 1. Contract construction drawings
 - 2. Contract specifications
 - 3. Addenda
 - 4. Submittal data
 - 5. Shop drawings



6. Automatic Control drawings
 7. Subcontractors Combined Services Drawings (all trades).
- B. Prepare a report of the preconstruction review list of recommended changes to allow most effective balancing.
 - C. Perform a construction review of the mechanical installation during the progress of the project. Purpose of the reviews to be:
 1. Identify potential problems for performing balancing.
 2. Identify modifications which will aid balancing.
 3. Schedule and coordinate balancing with other work and other trades.
 - D. Prepare a report of both preconstruction review and construction review to verify acceptance of installed conditions.
 - E. Pre-Balancing Conference: Prior to beginning of the testing, adjusting, and balancing procedures, the Subcontractor will schedule and conduct a conference with the Commissioner and representatives of installers of the mechanical systems. The objective of the conference is to review the preconstruction and construction report and final coordination and verification of system operation and readiness for testing, adjusting, and balancing.

1.13 PROJECT/SITE CONDITIONS

- A. General: Do not proceed until systems requiring testing, adjusting and balancing are clean and free from debris, dirt, and discarded building materials.
- B. Air balance and testing will not begin until system has been completed and is in full working order. The mechanical sub-Subcontractor will put all heating, ventilating and air conditioning systems and equipment into full operation with the final filters in place on all air handling units and will continue the operation of same during each working day of testing and balancing.

1.14 PROJECT CONDITIONS

- A. Full City of New York Occupancy: City of New York will occupy the site and existing building during entire TAB period. Cooperate with City of New York during TAB operations to minimize conflicts with City of New York's operations.

1.15 COORDINATION

- A. Notice: Provide seven days' advance notice for each test. Include scheduled test dates and times.
- B. Perform TAB after leakage and pressure tests on air distribution systems have been satisfactorily completed.



PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 FIELD TESTING - GENERAL

- A. During the progress of the Work, tests will be made as specified herein and as required by New York City Mechanical and Building code, including local New York City Inspection Department. Tests will be conducted by the Subcontractor as part of the Work of this Division and will include all qualified personnel, equipment apparatus and services required to perform the tests.
- B. Submit proposed test procedures, in soft and hard copy, recording forms and test equipment for review at least six (6) months prior to the start and execution of testing.
- C. Leaks, damage, or defects discovered or resulting from tests will be remove existing and install new or remove existing and install new to a like new condition. Leaky pipe joints, ductwork, etc., will be removed and remove existing and install new with acceptable materials.
- D. All equipment and instruments required for tests as well as additional thermometer wells, gauge and instrument connections will be installed at no additional cost to the City of New York.
- E. All instruments used for testing and balancing must have been calibrated within a period of three (3) months prior to balancing. Instrument calibration will be certified.
- F. Submit six (6) hard copies and six (6) soft copies of each complete testing and balancing and IAQ report to the Subcontractor and to the Commissioner for Commissioner's review. Send two (2) copies of the report to the Subcontractor and Commissioner. Submit individual testing and balance reports for each individual floor air distribution system and each ventilation system within two (2) weeks after the completion of the testing and balancing of systems.

3.3 EXAMINATION

- A. Examine the Contract Documents to become familiar with Project requirements and to discover conditions in systems' designs that may preclude proper TAB of systems and equipment.
- B. Examine systems for installed balancing devices, such as test ports, gage cocks, thermometer wells, flow-control devices, balancing valves and fittings, and manual volume dampers. Verify that locations of these balancing devices are accessible.
- C. Examine the approved submittals for HVAC systems and equipment.
- D. Examine design data including HVAC system descriptions, statements of design assumptions for environmental conditions and systems' output, and statements of philosophies and assumptions about HVAC system and equipment controls.



- E. Examine ceiling plenums and under floor air plenums used for supply, return, or relief air to verify that they are properly separated from adjacent areas. Verify that penetrations in plenum walls are sealed and fire-stopped if required.
- F. Verify that all required air transfer ducts have been properly located and installed.
- G. Examine equipment performance data including fan and pump curves.
 - 1. Relate performance data to Project conditions and requirements, including system effects that can create undesired or unpredicted conditions that cause reduced capacities in all or part of a system.
 - 2. Calculate system-effect factors to reduce performance ratings of HVAC equipment when installed under conditions different from the conditions used to rate equipment performance. To calculate system effects for air systems, use tables and charts found in AMCA 201, "Fans and Systems," or in SMACNA's "HVAC Systems - Duct Design." Compare results with the design data and installed conditions.
- H. Examine system and equipment installations and verify that field quality-control testing, cleaning, and adjusting specified in individual Sections have been performed.
- I. Examine test reports specified in individual system and equipment Sections.
- J. Examine HVAC equipment and filters and verify that bearings are greased, belts are aligned and tight, and equipment with functioning controls is ready for operation.
- K. Examine strainers. Verify that startup screens are remove existing and install new by permanent screens with indicated perforations.
- L. Examine three-way valves for proper installation for their intended function of diverting or mixing fluid flows.
- M. Examine heat-transfer coils for correct piping connections and for clean and straight fins.
- N. Examine system pumps to ensure absence of entrained air in the suction piping.
- O. Examine operating safety interlocks and controls on HVAC equipment.
- P. Report deficiencies discovered before and during performance of TAB procedures. Observe and record system reactions to changes in conditions. Record default set points if different from indicated values.

3.4 PREPARATION

- A. Prepare a TAB plan that includes strategies and step-by-step procedures.
- B. Complete system-readiness checks and prepare reports. Verify the following:
 - 1. Permanent electrical-power wiring is complete.
 - 2. Hydronic systems are filled, clean, and free of air.
 - 3. Automatic temperature-control systems are operational.
 - 4. Equipment and duct access doors are securely closed.
 - 5. Balance, smoke, and fire dampers are open.
 - 6. Isolating and balancing valves are open and control valves are operational.



7. Ceilings are installed in critical areas where air-pattern adjustments are required and access to balancing devices is provided.
8. Windows and doors can be closed so indicated conditions for system operations can be met.

3.5 GENERAL PROCEDURES FOR TESTING AND BALANCING

- A. Perform testing and balancing procedures on each system according to the procedures contained in AABC's "National Standards for Total System Balance" and ASHRAE 111 and in this Section.
 1. Comply with requirements in ASHRAE 62.1-2004, Section 7.2.2, "Air Balancing."
- B. Cut insulation, ducts, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary for TAB procedures.
 1. After testing and balancing, install test ports and duct access doors that comply with requirements specified under another section of this work.
 2. Install and join new insulation that matches removed materials. Remove existing and install new insulation, coverings, vapor barrier, and finish according to the requirements specified under another section of this work.
- C. Mark equipment and balancing devices, including damper-control positions, valve position indicators, fan-speed-control levers, and similar controls and devices, with apply new coating
- D. or other suitable, permanent identification material to show final settings.
- E. Take and report testing and balancing measurements in inch-pound (IP) units.

3.6 WELDING INSPECTION:

- A. Visual Inspection: Perform in accordance with industry standards. Cut out and test defective welds. If the percentage of defective welds is excessive, cut out and test additional welds as directed by the Commissioner.
- B. Obtain the radiographs of the steam piping. If any welds are in question, then cut out and test welds. If, based on the radiographs, the percentage of defective welds is excessive, then cut out and test additional welds as directed by the Commissioner.

3.7 VERIFICATION OF CONTROL OPERATION

- A. General: Perform the checks outlined in the following for all air system controls:
 1. Thermostats and humidistats - Verify calibration and operation of all thermostats and humidistats. Any deficiencies will be reported for correction. Recheck after correction. Record thermostat set point and output signal, space temperature.
 2. Damper Operation - Verify operation and position for all dampers. Any deficiencies will be reported for correction. Recheck after correction.
 3. Other Controls - Simulate control operations with control subcontractor in accordance with design requirements and manufacturer's recommendations. Any deficiencies will be reported for correction. Recheck after correction.



3.8 GENERAL PROCEDURES FOR BALANCING AIR SYSTEMS

- A. Prepare test reports for both fans and outlets. Obtain manufacturer's outlet factors and recommended testing procedures. Crosscheck the summation of required outlet volumes with required fan volumes.
- B. Prepare schematic diagrams of systems' "as-built" duct layouts.
- C. For variable-air-volume systems, develop a plan to simulate diversity.
- D. Determine the best locations in main and branch ducts for accurate duct-airflow measurements.
- E. Locate start-stop and disconnect switches, electrical interlocks, and motor starters.
- F. Verify that motor starters are equipped with properly sized thermal protection.
- G. Check dampers for proper position to achieve desired airflow path.
- H. Check for airflow blockages.
- I. Check condensate drains for proper connections and functioning.
- J. Verify that air duct system is sealed as specified in Division 23 Section "Metal Ducts."

3.9 PROCEDURES FOR VARIABLE-AIR-VOLUME SYSTEMS

- A. Compensating for Diversity: When the total airflow of all terminal units is more than the indicated airflow of the fan, place a selected number of terminal units at a minimum set-point airflow with the remainder at maximum-airflow condition until the total airflow of the terminal units equals the indicated airflow of the fan. Select the reduced-airflow terminal units so they are distributed evenly among the branch ducts.
- B. Note that VAV boxes are calibrated at factory. Nevertheless, recalibrate each VAV box in field as part of this work. Air balancer will show two readings for each box, minimum and maximum and corresponding inlet and outlet static pressure.
- C. Note that fan powered mixing boxes are calibrated at factory. However, due to changing inlet conditions, recalibrate each mixing box in field as part of this work and provide reading for box (CFM) (M_/sec), and primary air at maximum and minimum setting and corresponding inlet and outlet static pressure.
 - 1. NC (Noise Criteria) Tests: Operate the air handling systems after balancing, to determine that the schedule NC ratings in the spaces are not exceeded.
- D. All volume dampers and VAV boxes will be positioned for maximum air flow before taking initial supply airflow and static pressure readings. Advise Commissioner immediately if design airflows of air handling units are not achieved before proceeding with further testing.

3.10 PROCEDURES FOR MOTORS

- A. Motors, 1/2 HP and Larger: Test at final balanced conditions and record the following data:
 - 1. Manufacturer's name, model number, and serial number.



2. Motor horsepower rating.
3. Motor RPM.
4. Efficiency rating.
5. Nameplate and measured voltage, each phase.
6. Nameplate and measured amperage, each phase.
7. Starter thermal-protection-element rating.

- B. Motors Driven by Variable-Frequency Controllers: Test for proper operation at speeds varying from minimum to maximum. Test the manual bypass of the controller to prove proper operation. Record observations including name of controller manufacturer, model number, serial number, and nameplate data.

3.11 PROCEDURES FOR CONDENSING UNITS

- A. Verify proper rotation of fans.
- B. Measure entering- and leaving-air temperatures.
- C. Record compressor data.

3.12 PROCEDURES FOR TESTING, ADJUSTING, AND BALANCING EXISTING SYSTEMS

- A. Perform a preconstruction inspection of existing equipment that is to remain and be reused.
 1. Measure and record the operating speed, airflow, and static pressure of each fan.
 2. Measure motor voltage and amperage. Compare the values to motor nameplate information.
 3. Check the refrigerant charge.
 4. Check the condition of filters.
 5. Check the operation of the drain pan and condensate-drain trap.
 6. Check bearings and other lubricated parts for proper lubrication.
 7. Report on the operating condition of the equipment and the results of the measurements taken. Report deficiencies.
- B. Before performing testing and balancing of existing systems, inspect existing equipment that is to remain and be reused to verify that existing equipment has been cleaned and remove existing and install new. Verify the following:
 1. New filters are installed.
 2. Drain pans are clean.
 3. Fans are clean.
 4. Bearings and other parts are properly lubricated.
 5. Deficiencies noted in the preconstruction report are corrected.



- C. Perform testing and balancing of existing systems to the extent that existing systems are affected by the renovation work.
 - 1. Compare the indicated airflow of the remove existing and install new work to the measured fan airflows, and determine the new fan speed and the face velocity of filters and coils.
 - 2. Verify that the indicated airflows of the remove existing and install new work result in filter and coil face velocities and fan speeds that are within the acceptable limits defined by equipment manufacturer.
 - 3. If calculations increase or decrease the air flow rates and water flow rates by more than 5 percent, make equipment adjustments to achieve the calculated rates. If increase or decrease is 5 percent or less, equipment adjustments are not required.
 - 4. Balance each air outlet.

3.13 LEAKAGE TESTING, AIR DISTRIBUTION SYSTEM

- A. General: Each air distribution system will be tested for leakage before insulation is applied. After portions of the Work are completed, the following tests will be made in the presence of the Commissioner. Five (5) days advance written notice of the tests will be given to the Commissioner, who in turn will notify other parties interested.
- B. Furnish all gauges, blowers, instruments, test equipment and personnel required for tests, and make all provisions for removal of test equipment after tests have been made.
- C. Test all ductwork unless otherwise indicated in this Section.
- D. Leakage test will be in accordance with test method described in Section 5 of SMACNA HVAC Air Duct Leakage Test Manual, except as modified in this Section. Air leakage will not exceed limits specified.
- E. Air leakage testing during erection will include separate leakage air tests of built up air handling casings, discharge and intake plenums, machine room ductwork, complete and/or partial air risers, each completed and/or partial horizontal distribution system, and, after all ductwork is installed and central station apparatus is erected, leakage testing of the pressure side of the whole system up to the inlet of the variable air volume and fan powered terminal unit boxes. Test ducts/casings with positive pressure on the discharge side of the system fan and under negative pressure on 'the suction side of the system fan. Include testing of flexible runouts. It is the intent of the Specifications that ductwork will be tested in sections, if required, or as directed in order to permit work of other trades to proceed.
- F. Do not insulate ductwork until it has been successfully tested.
- G. Ductwork (+/-) 2.0" w.g (or less) external static pressure class (see following schedule):
 - 1. Representative samples of ductwork (approximately 20% of total linear feet of ductwork) will require leakage test as described below.
 - 2. Commissioner will decide samples of ductwork to be tested and date of leakage test to be conducted.
 - 3. If test results are good, remainder of ductwork is permitted to proceed without further testing. If ductwork fails test, remove existing and install new all ductwork including ductwork not tested. Then repeat leakage tests for new samples of ductwork as described above.



- 4. Before insulation is applied, run fan at design static pressure and check all joints for all ductwork, risers and branches.

- H. All ductwork:
 - 1. All ductwork on the roof, spaces will be tested after all riser tests have been accepted (where required) and after risers have been connected to the mains but before the branches have been connected to the risers.
 - 2. Mains will be tested as described for risers and branches.

- I. After the acceptance of the tests by the Commissioner, the branches will be connected to the risers and the ductwork will be released for insulation.

- J. Permissible leakage rates:

Duct System	Pressure Classification External Static Pressure	SMACNA Seal	SMACNA Leakage Classification (Table 4-1)
All return and general exhaust ducts (toilets, MER Ventilation, non-lab exhaust)	-3" wg.	B	12

3.14 OPERATING TESTS

- A. General: After the various systems are pressure-tested and cleaned as hereinbefore specified, each piping and air handling system will be tested in the presence of the Commissioner. Five days advance written notice of the tests will be given to the Commissioner by the Subcontractor who in turn will notify other parties interested.

- B. Furnish all gauges, instruments, test equipment and personnel required for the tests. Adjust all equipment to perform with the least possible noise and vibration consistent with its duty. Quietness of operation of all equipment is a requirement. Any equipment producing objectionable noise in occupied spaces must be remove existing and install new or removed and remove existing and install new with satisfactory equipment.

- C. Piping Systems: operate the heating systems, and make adjustments in controls and equipment, and complete necessary balancing to deliver not less than the water quantities shown on the drawings at each equipment item.

- D. NC (Noise Criteria) Tests: Operate the air handling systems after balancing, to determine that the scheduled NC ratings in the spaces are not exceeded.

3.15 SOUND AND VIBRATION TESTING

- A. Sound Traps and Silencers:
 - 1. After installation: measure total system pressure before and after attenuators.



2. If pressure loss exceeds maximum static pressure loss schedules on drawings: at no charge, remove existing and install new attenuators and/or modify entrance and/or discharge aerodynamic flow to obtain specified performance.
- B. Noise Criterion Levels:
1. After air systems are properly air balanced, the resulting octave band noise levels should be measured in all spaces specified to determine compliance, in accordance with National Environmental Balancing Board (NEBB) Procedural Standards for the Measurement and Assessment of Sound and Vibration.
 2. If design noise levels are exceeded, the air balancer will check all air moving devices to ensure all fan systems are operating at the lowest rpm and static pressure to deliver (exhaust) the design cfm from the most remote point. If the balancer needs to make a sheave change to accomplish this, the change should be at no charge to the City of New York.
- C. Rotating Equipment Vibration Levels
1. After systems are properly air and water flow balanced, vibration levels of all equipment will be tested in accordance with National Environmental Balancing Board (NEBB) Procedural Standards for the Measurement and Assessment of Sound and Vibration.
 2. If equipment vibration levels are found to be excessive then the equipment will have the necessary remove existing and install new performed and/or be dynamically balanced to reduce vibration.

3.16 TOLERANCES

- A. Set HVAC system's air flow rates and water flow rates within the following tolerances:
1. Exhaust Fans and Equipment with Fans: Plus or minus 5 percent.
 2. Air Outlets and Inlets: Plus or minus 5 percent.

3.17 REPORTING

- A. Initial Construction-Phase Report: Based on examination of the Contract Documents as specified in "Examination" Article, prepare a report on the adequacy of design for systems' balancing devices. Recommend changes and additions to systems' balancing devices to facilitate proper performance measuring and balancing. Recommend changes and additions to HVAC systems and general construction to allow access for performance measuring and balancing devices.
- B. Status Reports: Prepare weekly progress reports to describe completed procedures, procedures in progress, and scheduled procedures. Include a list of deficiencies and problems found in systems being tested and balanced. Prepare a separate report for each system and each building floor for systems serving multiple floors.

3.18 FINAL REPORT

- A. General: Prepare a certified written report; tabulate and divide the report into separate sections for tested systems and balanced systems.
1. Include a certification sheet at the front of the report's binder, signed and sealed by the certified testing and balancing Engineer, retained by the Contractor.
 2. Include a list of instruments used for procedures, along with proof of calibration.



- B. Final Report Contents: In addition to certified field-report data, include the following:
1. Fan curves.
 2. Manufacturers' test data.
 3. Field test reports prepared by system and equipment installers.
 4. Other information relative to equipment performance; do not include Shop Drawings and product data.
- C. General Report Data: In addition to form titles and entries, include the following data:
1. Title page.
 2. Name and address of the TAB subcontractor.
 3. Project name.
 4. Project location.
 5. Commissioner's name and address.
 6. Subcontractor's name and address.
 7. Report date.
 8. Signature of TAB supervisor who certifies the report.
 9. Table of Contents with the total number of pages defined for each section of the report. Number each page in the report.
 10. Summary of contents including the following:
 - a. Indicated versus final performance.
 - b. Notable characteristics of systems.
 - c. Description of system operation sequence if it varies from the Contract Documents.
 11. Nomenclature sheets for each item of equipment.
 12. Data for terminal units, including manufacturer's name, type, size, and fittings.
 13. Notes to explain why certain final data in the body of reports vary from indicated values.
 14. Test conditions for fans and pump performance forms including the following:
 - a. Settings for outdoor-, return-, and exhaust-air dampers.
 - b. Conditions of filters.
 - c. Fan drive settings including settings and percentage of maximum pitch diameter.
 - d. Inlet vane settings for variable-air-volume systems.
 - e. Other system operating conditions that affect performance.
- D. System Diagrams: Include schematic layouts of air and hydronic distribution systems. Present each system with single-line diagram and include the following:
1. Quantities of outdoor, supply, return, and exhaust airflows.
 2. Duct, outlet, and inlet sizes.
 3. Terminal units.
 4. Balancing stations.
 5. Position of balancing devices.
 6. Motor Data:
 - a. Motor make, and frame type and size.
 - b. Horsepower and rpm.
 - c. Volts, phase, and hertz.
 - d. Full-load amperage and service factor.
 - e. Sheave make, size in inches (mm), and bore.
 - f. Center-to-center dimensions of sheave, and amount of adjustments in inches (mm).
 7. Test Data (Indicated and Actual Values):



- a. Total air flow rate in cfm (L/s).
 - b. Fan rpm.
 - c. Discharge static pressure in inches wg (Pa).
 - d. Return airflow in cfm (L/s).
 - e. Outdoor-air damper position.
 - f. Return-air damper position.
- E. Fan Test Reports: For supply, return, and exhaust fans, include the following:
1. Fan Data:
 - a. System identification.
 - b. Location.
 - c. Make and type.
 - d. Model number and size.
 - e. Manufacturer's serial number.
 - f. Arrangement and class.
 - g. Sheave make, size in inches (mm), and bore.
 - h. Center-to-center dimensions of sheave, and amount of adjustments in inches (mm).
 2. Motor Data:
 - a. Motor make, and frame type and size.
 - b. Horsepower and rpm.
 - c. Volts, phase, and hertz.
 - d. Full-load amperage and service factor.
 - e. Sheave make, size in inches (mm), and bore.
 - f. Center-to-center dimensions of sheave, and amount of adjustments in inches (mm).
 - g. Number, make, and size of belts.
 3. Test Data (Indicated and Actual Values):
 - a. Total airflow rate in cfm (L/s).
 - b. Total system static pressure in inches wg (Pa).
 - c. Fan rpm.
 - d. Discharge static pressure in inches wg (Pa).
 - e. Suction static pressure in inches wg (Pa).
- F. Round, Flat-Oval, and Rectangular Duct Traverse Reports: Include a diagram with a grid representing the duct cross-section and record the following:
1. Report Data:
 - a. System and air-handling-unit number.
 - b. Location and zone.
 - c. Traverse air temperature in deg F (deg C).
 - d. Duct static pressure in inches wg (Pa).
 - e. Duct size in inches (mm).
 - f. Duct area in sq. ft. (sq. m).
 - g. Indicated air flow rate in cfm (L/s).
 - h. Indicated velocity in fpm (m/s).
 - i. Actual air flow rate in cfm (L/s).
 - j. Actual average velocity in fpm (m/s).
 - k. Barometric pressure in psig (Pa).



G. Air-Terminal-Device Reports:

1. Unit Data:
 - a. System and air-handling unit identification.
 - b. Location and zone.
 - c. Apparatus used for test.
 - d. Area served.
 - e. Make.
 - f. Number from system diagram.
 - g. Type and model number.
 - h. Size.
 - i. Effective area in sq. ft. (sq. m).
2. Test Data (Indicated and Actual Values):
 - a. Air flow rate in cfm (L/s).
 - b. Air velocity in fpm (m/s).
 - c. Preliminary air flow rate as needed in cfm (L/s).
 - d. Preliminary velocity as needed in fpm (m/s).
 - e. Final air flow rate in cfm (L/s).
 - f. Final velocity in fpm (m/s).
 - g. Space temperature in deg F (deg C).

H. Instrument Calibration Reports:

1. Report Data:
 - a. Instrument type and make.
 - b. Serial number.
 - c. Application.
 - d. Dates of use.
 - e. Dates of calibration.

3.19 INSPECTIONS

A. Initial Inspection:

1. After testing and balancing are complete, operate each system and randomly check measurements to verify that the system is operating according to the final test and balance readings documented in the final report.
2. Check the following for each system:
 - a. Measure airflow of at least 25 percent of air outlets.
 - b. Measure water flow of at least 25 percent of terminals.
 - c. Measure room temperature at each thermostat/temperature sensor. Compare the reading to the set point.
 - d. Verify that balancing devices are marked with final balance position.
 - e. Note deviations from the Contract Documents in the final report.

B. Final Inspection:

1. After initial inspection is complete and documentation by random checks verifies that testing and balancing are complete and accurately documented in the final report, request that a final inspection be made by Commissioner.
2. The TAB subcontractor's test and balance Professional Engineer will conduct the inspection in the presence of Commissioner.



3. The Commissioner will randomly select measurements, documented in the final report, to be rechecked. Rechecking will be limited to either 10 percent of the total measurements recorded or the extent of measurements that can be accomplished in a normal 8-hour business day.
4. If rechecks yield measurements that differ from the measurements documented in the final report by more than the tolerances allowed, the measurements will be noted as "FAILED."
5. If the number of "FAILED" measurements is greater than 10 percent of the total measurements checked during the final inspection, the testing and balancing will be considered incomplete and will be rejected.

C. TAB Work will be considered defective if it does not pass final inspections. If TAB Work fails, proceed as follows:

1. Recheck all measurements and make adjustments. Revise the final report and balancing device settings to include all changes; resubmit the final report and request a second final inspection.

D. Prepare test and inspection reports.

3.20 ADDITIONAL TESTS

- A. Within 90 days of completing TAB, perform additional TAB to verify that balanced conditions are being maintained throughout and to correct unusual conditions.
- B. Seasonal Periods: If initial TAB procedures were not performed during near-peak summer and winter conditions, perform additional TAB during near-peak summer and winter conditions.

END OF SECTION 23 05 93



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 233113 - METAL DUCTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This section includes all the rectangular, round and flat-oval metal ducts and plenums for the complete heating, ventilating and air conditioning systems in all pressure classes. In addition, this section includes the following:
1. Sheet Metal
 2. Air Casings and Plenums
 3. Dampers for Balancing
 4. Access Doors in Sheet Metal Work.
 5. Flexible Connections
 6. Sheet Metal Materials
 7. Turning Vanes
 8. Sealants and Gaskets
 9. Hangers and Supports
 10. Refer to Sections 233713 and 233113 for air distribution devices and accessories required in conjunction with this work.
- B. Related Sections:
1. 230593 Testing, Adjusting, and Balancing For HVAC

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.



1.4 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.
- B. Qualify welding processes and welding operators in accordance with AWS.D1.1 “Structural Welding Code - Steel” for hangers and supports and SWS.D9.1 “Sheet Metal Welding Code.”
- C. Qualify each welder in accordance with AWS qualification tests for welding processes involved. Certify that their qualification is current.
- D. NFPA Compliance: Comply with the following NFPA Standards:
 - 1. NFPA 90A, “Standard for the Installation of Air Conditioning and Ventilating Systems,” except as indicated otherwise.
- E. SMACNA - HVAC Duct Construction Standards, Latest Edition.
- F. At the discretion of the Commissioner, sheet metal gauges, and reinforcing may be checked at various times to verify all duct construction is in compliance.
- G. Welding Qualifications: Qualify procedures and personnel according to the following:
 - 1. AWS D1.1/D1.1M, "Structural Welding Code - Steel," for hangers and supports.
 - 2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum," for aluminum supports.
 - 3. AWS D9.1M/D9.1, "Sheet Metal Welding Code," for duct joint and seam welding.
- H. ASHRAE Compliance: Applicable requirements in ASHRAE 62.1-2004, Section 5 - "Systems and Equipment" and Section 7 - "Construction and System Start-Up."
- I. ASHRAE/IESNA Compliance: Applicable requirements in ASHRAE/IESNA 90.1-2004.
- J. NFPA 90A, “Standard for the Installation of Air Conditioning and Ventilating Systems,”
- K. NFPA 96, “Standard for the Installation of Equipment for the Removal of Smoke and Grease-Laden Vapors for Commercial Cooking Equipment,” Chapter 3, “Duct System,” for kitchen hood duct systems, except as indicated otherwise.
- L. SMACNA – HVAC Duct Construction Standards, Latest Edition.
- M. SMACNA – “Guidelines for Welding Sheet Metal.”
- N. Duct sealants, liners, insulation, etc. will have a UL label and will have a Flame Spread rating not over 25 and a Smoke Developed rating no higher than 50, when in the final dry state.



1.5 SUBMITTALS

- A. Include product description, list of materials for each service, and locations.
- B. Product data including details of construction relative to materials, dimensions of individual components, profiles, and finishes for the following items:
 - 1. Duct liner.
 - 2. Sealing Materials.
 - 3. Fire-Stopping Materials.
 - 4. Dampers, turning vanes, access doors, plenums, flexible connectors, etc.
- C. Shop drawings from duct fabrication shop, drawn to scale not smaller than 3/8 inch equals 1 foot, detailing:
 - 1. Fabrication, assembly and installation details, including plans, elevations, sections, details of components, and attachments to other work.
 - 2. Duct layout for all areas of work, indicating pressure classifications and sizes in plan view. For exhaust duct systems, indicate the classification of the materials handled as defined in this Section.
 - a. Fittings.
 - b. Reinforcing details and spacing.
 - c. Seam and joint construction details.
 - d. Penetrations through fire-rated and other partitions.
 - e. AC unit, equipment, terminal unit, coil installations.
 - f. Hangers and supports, including methods for building attachment, seismic restraint, vibration isolation, and duct attachment.
- D. Welding certificates including welding procedures specifications, welding procedures qualifications test records, and welders qualifications test records complying with requirements specified in “Quality Assurance” above.
 - 1. Complete drawings of the system installation to include the hood(s), exhaust duct(s), and appliances along with the interface of the fire extinguishing system detectors, piping, nozzles, fuel shut-off devices, agent storage container(s), and manual actuation device(s) must be submitted in accordance with the requirements of the NYC mechanical and building code.
 - 2. Design Submittal:
 - a. Design Calculations: Calculations, including analysis data signed and sealed by the qualified Professional Engineer, licensed in the State of New York responsible for their preparation for selecting hangers and supports and seismic restraints.



E. Shop Drawings:

1. Ductwork Shop Standards, including but not limited to, materials, duct gauges, fittings, joint and seam construction and sealing, reinforcement details and spacing., materials, fabrication, assembly, and spacing of hangers and supports.
2. Fabrication, assembly, and installation, including plans, elevations, sections, components, take-offs, and attachments to other work.
3. Factory- and shop-fabricated ducts and fittings.
4. Duct layout indicating sizes, configuration, liner material, and static-pressure classes.
5. Elevation of top and bottoms of ducts.
6. Dimensions of main duct runs from building grid lines.
7. Fittings.
8. Reinforcement and spacing.
9. Seam and joint construction.
10. Penetrations through fire-rated and other partitions.
11. Equipment installation based on equipment being used on Project.
12. Locations for duct accessories, including dampers, turning vanes, and access doors and panels.
13. Hangers and supports, including methods for duct and building attachment and vibration isolation.

F. Coordination Drawings: Plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved. Refer to DDC General Conditions for additional requirements.

1. Duct installation in congested spaces, indicating coordination with general construction, building components, and other building services. Indicate proposed changes to duct layout.
2. Suspended ceiling components.
3. Structural members to which duct will be attached.
4. Size and location of initial access modules for acoustical tile.
5. Penetrations of smoke barriers and fire-rated construction.
6. Items penetrating finished ceiling including the following:



- a. Lighting fixtures.
- b. Air outlets and inlets.
- c. Sprinklers.
- d. Access panels.
- e. Perimeter moldings.

G. Welding certificates.

H. Field quality-control reports.

1.6 DEFINITIONS

A. Sealing Requirements Definitions: For the purposes of duct systems sealing requirements specified in this Section, the following definitions apply.

- 1. Seams: A seam is defined as jointing of two longitudinally (in the direction of airflow) oriented edges of duct surface material occurring between two joints. All other duct surface connections made on the perimeter are deemed to be joints.
- 2. Joints: Joints include girth joints, branch and sub branch intersections; so-called duct collar tap-ins; fitting subsections, louver and air terminal connection to ducts; access door and access panel frames and jambs; duct, plenum and casing abutments to building structures.

1.7 SYSTEM PERFORMANCE REQUIREMENTS

- A. All ductwork indicated on the Drawings, specified or required for the air conditioning and ventilating systems will be of materials as hereinafter specified unless indicated otherwise. All air distribution ductwork will be fabricated, erected, supported, etc., in accordance with all applicable standards of SMACNA Duct Manuals where such standards do not conflict with NFPA 90A and where class of construction equals or exceeds that specified herein.
- B. All ductwork shown on the Drawings, specified or required for the heating, ventilating and air conditioning systems will be constructed and erected in a first class workmanlike manner. The work will be guaranteed against noise, chatter, whistling, vibration, and free from pulsation under all conditions of operation. After the system is in operation, should these defects occur, they will be corrected as directed by the Commissioner.
- C. Except for special ducts specified elsewhere herein, all sheet metal used on the project will be constructed from prime galvanized steel sheets and/or coils up to 60” in width. Each sheet will be stenciled with manufacturer’s name and gauge. Coils of sheet steel will be stenciled throughout on ten foot (10’) centers with manufacturer’s name and must be visible after duct is installed. Sheet metal must conform to SMACNA sheet metal tolerances as outlined in SMACNA’s “HVAC Duct Construction Standards.”
- D. Provide a duct system with minimum resistance to airflow. Take-offs will be throated and transitions made as gradual as possible. ‘Bullhead’ or sharp take-offs are not acceptable. Branch take-offs will be 45 deg



entry type. Straight tap or butt flanged connections are not acceptable. Clinch lock connections are preferred.

- E. The duct system design, as indicated, has been used to select and size air moving and distribution equipment and other components of the air system. Changes or alterations to the layout of configuration of the duct system must be specifically approved in writing. Accompany requests for layout modifications with calculations showing that the proposal layout will provide the original design results without increasing the system total pressure.
- F. Airstream Surfaces: Surfaces in contact with the airstream will comply with requirements in ASHRAE 62.1-2004.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Duct dimensions indicated on drawings are clear, inside dimensions. The sheet metal dimensions will be increased to accommodate internal liner where liner is required.
- B. Drawings are diagrammatic and indicate the arrangement of the principal apparatus, ductwork and piping and will be followed as closely as possible. All offsets, rises, drops, fittings and accessories are not indicated on drawings, but will be provided as required to install system. Carefully investigate structure, finish conditions, and the work of other sections affecting sheet metal work, including work associated with testing, adjusting and balancing, in order to arrange all items accordingly. Provide best possible arrangement so as to provide maximum headroom and service by client agency clearances.
- C. In addition to sheet metal ductwork specified herein, furnish and install, or install as furnished by other sections, accessories and devices including, but not limited to, air distribution devices, smoke detectors, plenums, canopy hoods, and blank-off panels at unused louver areas.
- D. Furnish and install intake and exhaust plenums attached to louvers.
- E. Except as noted, all reinforcement will be external.

2.2 DUCTWORK FABRICATION REQUIREMENTS

- A. All Ductwork construction will comply with SMACNA HVAC Duct Construction Standards, latest edition.
- B. All Ductwork will be constructed to comply with the following pressure classification requirements, (SMACNA HVAC Duct Construction Standards, latest edition).
- C. Joints and Seams: Select joint and seam types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."



- D. Elbows, Transitions, Offsets, Branch Connections, and Other Duct Construction: Select types and fabricate according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 2, "Fittings and Other Construction," for static-pressure class, applicable sealing requirements, materials involved, duct-support intervals, and other provisions in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- E. The specifications refer to SMACNA standards, which will be considered minimal. Refer to latest NYC Mechanical and Building Codes for additional requirements.

Duct System	SMACNA Table No.	SMACNA Pressure Classification	SMACNA Seal Classification
All return ducts and general exhaust ducts (toilets, MER Ventilation, non-lab exhaust, etc.)	2-4	-3" wg	B

2.3 DAMPERS FOR BALANCING

- A. General Volume Damper Requirements:
 1. Provide factory fabricated manual volume dampers in all supply, return and exhaust branch ducts for properly regulating and balancing airflow to all terminal outlets, whether indicated on drawings or not. Dampers will be constructed per SMACNA Latest Edition, with locking quadrant and 8" maximum blade width.
 2. Volume dampers are specified under section 233310 Dampers.
 3. When installing dampers in ducts to be insulated provide raised bracket for damper quadrant with height equal to insulation thickness such that the adjustment of the damper handle will not disturb the insulation.
 4. Locate damper as far as possible from air outlet to avoid noise transmission.
 5. For inaccessible ceilings, as well as for specialty areas such as lobbies, etc., furnish remote damper actuator operable through face of nearest diffuser. Damper controller and cable will be concealed above the ceiling. Balancing dampers will include all necessary hardware to ensure compatibility with remote cable control system
 6. Coordinate with General Construction trades for easy access to damper.
 7. Dampers in stainless steel ductwork will be of stainless steel construction.



2.4 ACCESS DOORS IN SHEET METAL WORK

- A. Provide suitable access doors and frames to permit inspections, operation and service by client agency of all valves, all coils including reheat coils, controls, fire dampers, air monitors where applicable, automatic or motorized dampers, filters, bearings, traps or other apparatus concealed behind the sheet metal work. All such doors will be of double construction of not less than No. 20 gauge sheet metal and will have sponge rubber gaskets around their entire perimeter. Doors in insulated ducts or insulated casings will have rigid fiberglass insulation between the metal panels.
- B. All access doors in sheet metal ducts will be hung on heavy flat hinges and will be secured in the closed position by means of cast zinc clinching type latches. Where space conditions preclude hinges, use four heavy window type latches. Doors into ducts will in general not be smaller than 18" x 18" except for access door to fire dampers which will depend on size of fire damper. Submit samples for approval.
- C. In no case will access to any items of equipment requiring inspections, adjustment, or servicing require the removal of nuts, bolts, screws, wing nuts, wedges, or any other screwed or loose device.
- D. Each sheet metal chamber will have access doors for access to all parts of the system. Doors will be fitted with cast zinc door latches, two per door. Latches will be operable from both sides of casing. Hinges will be no extra parts which are attic stock heavy, zinc plated hinges, minimum of two per door. The doors will be felted or provided with rubber gaskets so as to make them airtight. The doors will be made with inner and outer shells 2 inches apart so that they may be properly insulated and properly operated. Doors will be a minimum size of 20" x 48".

2.5 INSPECTION PORTHOLES

- A. Provide viewing portholes at both sides of fan sections and return air mixing plenums at air handling units 5,000 CFM or larger (package or built-up) to allow for inspection of fan belts, inlet vanes, damper actuators, etc.
- B. Portholes will be 16" dia. or 12" x 8" made of 1/4" thick acrylic reinforced with flanges in both sides.

2.6 SHEET METAL MATERIALS

- A. General Material Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for acceptable materials, material thicknesses, and duct construction methods unless otherwise indicated. Sheet metal materials will be free of pitting, seam marks, roller marks, stains, discolorations, and other imperfections.
- B. Galvanized Sheet Steel: Comply with ASTM A 653/A 653M, A924.
 - 1. Galvanized Coating Designation: G90.
 - 2. Finishes for Surfaces Exposed to View: Mill phosphatized.
- C. Carbon-Steel Sheets: Comply with ASTM A 1008/A 1008M, with oiled, matte finish for exposed ducts.



- D. Stainless-Steel Sheets: Comply with ASTM A 480/A 480M, Type 316L cold rolled, annealed, sheet. Exposed surface finish will be No. 2B.
- E. Aluminum Sheets: Comply with ASTM B 209 (ASTM B 209M) Alloy 3003, H14 temper; with mill finish for concealed ducts, and standard, one-side bright finish for duct surfaces exposed to view.
- F. Factory- or Shop-Applied Antimicrobial Coating:
 - 1. Apply to the surface of sheet metal that will form the interior surface of the duct. An untreated clear coating will be applied to the exterior surface.
 - 2. Antimicrobial compound will be tested for efficacy by an NRTL and registered by the EPA for use in HVAC systems.
 - 3. Coating containing the antimicrobial compound will have a hardness of 2H, minimum, when tested according to ASTM D 3363.
 - 4. Surface-Burning Characteristics: Maximum flame-spread index of 25 and maximum smoke-developed index of 50 when tested according to UL 723; certified by an NRTL.
 - 5. Shop-Applied Coating Color: White.
 - 6. Antimicrobial coating on sheet metal is not required for duct containing liner treated with antimicrobial coating.
- G. Reinforcement Shapes and Plates: ASTM A 36/A 36M, steel plates, shapes, and bars; black and galvanized.
 - 1. Where black- and galvanized-steel shapes and plates are used to reinforce aluminum ducts, isolate the different metals with butyl rubber, neoprene, or EPDM gasket materials.
- H. Tie Rods: Galvanized steel, 1/4-inch (6-mm) minimum diameter for lengths 36 inches (900 mm) or less; 3/8-inch (10-mm) minimum diameter for lengths longer than 36 inches (900 mm).

2.7 SPECIAL DUCTWORK CONSTRUCTION

- A. Ductwork required to be removable will be companion flanged SMACNA Type T-22.
- B. Ductwork exposed to weather: After exposed ductwork and joints are sealed and tested, as specified, apply over and around the same areas of possible leakage (joints), an approved sealer system.
- C. Exhaust Stacks on Top of Exhaust Fan:
 - 1. Construct stacks from same material as exhaust duct.
 - 2. Stacks will be self-supporting and constructed for wind velocities up to 125 MPH from all directions.
 - 3. Fabricate stackhead as indicated on ACGIH Fig. 8-6 for vertical discharge stack. Refer to drawings for additional details.



2.8 FLEXIBLE CONNECTIONS

- A. All fan and air supply unit connections, both at inlet and discharge will be made with flexible material so as to prohibit the transfer of vibration from fans to ductwork connecting thereto, without air leakage. The material between the clamps will have sufficient slack so as to prevent tearing due to fan movement.
- B. The flexible connections will be a minimum of 12” long. Material will be mechanically locked to the outside helix. Use of adhesives to lock fabric in place is not acceptable. The helix is constructed of a corrosive resistant galvanized steel, formed and mechanically locked to the ducts fabric on the outside to prevent tearing.
- C. Flexible fabric ductwork will be rated at 6” positive pressure and at 4” negative pressure.
- D. Flexible metal duct will be listed UL Class 1.
- E. Flexible connections will be fabricated from approved flame proofed fabric conforming to NFPA 90A. Asbestos cloth is not permitted.
- F. Indoor installations will be Neoprene or vinyl coated fabrics.
- G. Outdoor installations will use Hypalon coated fabric.
- H. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Flexmaster, Type 8.
 - 2. MKT – Fabric Duct
 - 3. NX Sheetmetal Inc.
 - 4. Or Approved Equal

2.9 AIR INTAKES AND DISCHARGES

- A. Air intake and discharge louvers and screens in the façade of the building will be furnished and installed under another contract.

2.10 BLANK-OFF PANELS FOR UNUSED LOUVER AREAS

- A. Provide a minimum 20 gauge sheet metal blank-off panels for unused louver areas that are not enjoined or connected to an active plenum.
- B. Exterior/visible face of blank-off panel will be cleaned and apply new coating flat black, prior to installation.
- C. Provide safing consisting of 2” rigid insulation on an aluminum panel for all unused portions of the louver.



- D. Louver areas on mechanical drawings may be indicated in free area. Subcontractor to review architectural drawings to determine actual louver areas.

2.11 TURNING VANES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Ductmate Industries, Inc.
 - 2. Duro Dyne Inc.
 - 3. METALAIRE, Inc.
 - 4. SEMCO Incorporated
 - 5. Ward Industries, Inc.; a division of Hart & Cooley, Inc.
 - 6. Or Approved Equal
- B. Manufactured Turning Vanes for Metal Ducts: Curved blades of galvanized sheet steel; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
 - 1. Acoustic Turning Vanes: Fabricate airfoil-shaped aluminum extrusions with perforated faces and fibrous-glass fill.
- C. Manufactured Turning Vanes for Nonmetal Ducts: Fabricate curved blades of resin-bonded fiberglass with acrylic polymer coating; support with bars perpendicular to blades set; set into vane runners suitable for duct mounting.
- D. General Requirements: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible"; Figures 2-3, "Vaness and Vane Runners," and 2-4, "Vane Support in Elbows."
- E. Vane Construction: Single wall for ducts up to 32 inches wide and double wall for larger dimensions.

2.12 SEALANT AND GASKETS

- A. General Sealant and Gasket Requirements: Surface-burning characteristics for sealants and gaskets will be a maximum flame-spread index of 25 and a maximum smoke-developed index of 50 when tested according to UL 723; certified by an NRTL.
- B. Two-Part Tape Sealing System:
 - 1. Tape: Woven cotton fiber impregnated with mineral gypsum and modified acrylic/silicone activator to react exothermically with tape to form hard, durable, airtight seal.
 - 2. Sealant: Modified styrene acrylic.
 - 3. Water resistant.
 - 4. Mold and mildew resistant.
 - 5. Service: Indoor and outdoor.
 - 6. Service Temperature: Minus 40 to plus 200 deg F (Minus 40 to plus 93 deg C).
 - 7. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum.



8. For indoor applications, use sealant that has a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

C. Water-Based Joint and Seam Sealant:

1. Application Method: Brush on.
2. Solids Content: Minimum 65 percent.
3. Shore A Hardness: Minimum 20.
4. Water resistant.
5. Mold and mildew resistant.
6. VOC: Maximum 75 g/L (less water).
7. Maximum Static-Pressure Class: 10-inch w.g (2500 Pa), positive and negative.
8. Service: Indoor or outdoor.
9. Substrate: Compatible with galvanized sheet steel (both PVC coated and bare), stainless steel, or aluminum sheets.

D. Flanged Joint Sealant: Comply with ASTM C 920.

1. General: Single-component, acid-curing, silicone, elastomeric.
2. Type: S
3. Grade: NS
4. Class: 25
5. Use: O
6. For indoor applications, use sealant that has a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

E. Flange Gaskets: Butyl rubber, neoprene, or EPDM polymer with polyisobutylene plasticizer.

F. Round Duct Joint O-Ring Seals:

1. Seal will provide maximum leakage class of 3 cfm/100 sq. ft. at 1-inch w.g (0.14 L/s per sq. m at 250 Pa) and will be rated for 10-inch w.g (2500-Pa) static-pressure class, positive or negative.
2. EPDM O-ring to seal in concave bead in coupling or fitting spigot.
3. Double-lipped, EPDM O-ring seal, mechanically fastened to factory-fabricated couplings and fitting spigots.

2.13 HANGERS AND SUPPORTS

- A. Hanger Rods for Noncorrosive Environments: Cadmium-plated steel rods and nuts.
- B. Hanger Rods for Corrosive Environments: Electro galvanized, all-thread rods or galvanized rods with threads apply new coating with zinc-chromate primer after installation.
- C. Strap and Rod Sizes: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," "Rectangular Duct Hangers Minimum Size," and "Minimum Hanger Sizes for Round Duct."



- D. Steel Cables for Galvanized-Steel Ducts: Galvanized steel complying with ASTM A 603.
- E. Steel Cables for Stainless-Steel Ducts: Stainless steel complying with ASTM A 492.
- F. Steel Cable End Connections: Cadmium-plated steel assemblies with brackets, swivel, and bolts designed for duct hanger service; with an automatic-locking and clamping device.
- G. Duct Attachments: Sheet metal screws, blind rivets, or self-tapping metal screws; compatible with duct materials.
- H. Trapeze and Riser Supports:
 - 1. Supports for Galvanized-Steel Ducts: Galvanized-steel shapes and plates.
 - 2. Supports for Stainless-Steel Ducts: Stainless-steel shapes and plates.
 - 3. Supports for Aluminum Ducts: Aluminum or galvanized steel coated with zinc chromate.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 DUCT INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of duct system. Indicated duct locations, configurations, and arrangements were used to size ducts and calculate friction loss for air-handling equipment sizing and for other design considerations. Install duct systems as indicated unless deviations to layout are approved on Shop Drawings and Coordination Drawings.
- B. All ductwork indicated on drawings is schematic. Therefore, changes in duct size and/or location will be made where necessary to conform to space conditions, at no additional cost to the City of New York.
- C. Install ducts according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" unless otherwise indicated.
- D. Provide necessary offsets, transitions and streamliners to avoid interference with the building construction, piping, or equipment. Locate ducts with sufficient space around equipment to allow normal operating and service by client agency activities.
- E. Provide fittings, branches, inlets and outlets in such a manner that air turbulence is reduced to a minimum.
- F. Provide a duct system with minimum resistance to airflow. Take-offs will be throated and transitions made as gradual as possible. 'Bullhead' or sharp take-offs are not acceptable. Branch take-offs will be 45 deg entry type. Straight tap or butt flanged connections are not acceptable. Clinch lock connections are preferred.



- G. Provide straight runs of ductwork at equipment, fans, coils, terminal boxes and humidifiers per manufacturer's recommendations.
- H. Tees and laterals at 90 deg or round ducts will be 45 deg lateral or 90 deg tee with oval to round tap. 90 deg tee fitting or 90 deg tap is not acceptable. Conical tees are acceptable.
- I. Provide flexible connector where ductwork connects to fans, air handling units and other rotating equipment and where indicated on drawings.
- J. Furnish and install manual dampers, fire dampers, registers, grilles, register boxes, access doors, sound traps, etc., as described elsewhere in the specifications and as required for a complete system, ready for operation.
- K. Where fire and smoke dampers, automatic dampers or combination fire/smoke dampers are shown on drawings or are required, their selection will be made so that the dampers of all ratings and types will be of the nominal 100% face area type, with blade package and frame components out of the airstream. These dampers will include the required oversize enclosures that will be sealed by the damper manufacturer for the appropriate duct pressure class into which they are installed. Such dampers will have appropriate rectangular, flat oval or round duct collars to facilitate connection of mating ductwork. The Subcontractor will be responsible for any additional sealing of duct collars and connections required to maintain the duct seal class requirements, but will not jeopardize the UL breakaway connection.
- L. All dampers are to be selected and installed with duct transitions so that the damper clear open area (including frames, stops, etc.), equals to or exceeds the connecting duct (inlet and outlet) clear open area (duct clear inside dimensions). The mechanical Subcontractor will provide the required duct transitions.
- M. Install ducts with fewest possible joints.
- N. Install factory- or shop-fabricated fittings for changes in direction, size, and shape and for branch connections.
- O. Unless otherwise indicated, install ducts vertically and horizontally, and parallel and perpendicular to building lines.
- P. Install ducts close to walls, overhead construction, columns, and other structural and permanent enclosure elements of building.
- Q. Install ducts with a clearance of 1 inch (25 mm), plus allowance for insulation thickness.
- R. Route ducts to avoid passing through transformer vaults and electrical equipment rooms and enclosures.
- S. Where ducts pass through non-fire-rated interior partitions and exterior walls and are exposed to view, cover the opening between the partition and duct or duct insulation with sheet metal flanges of same metal thickness as the duct. Overlap openings on four sides by at least 1-1/2 inches (38 mm).
- T. Where ducts pass through fire-rated interior partitions and exterior walls, install fire dampers. Comply with requirements in Division 23 Section "Air Duct Accessories" for fire and smoke dampers.



- U. Protect duct interiors from moisture, construction debris and dust, and other foreign materials. Comply with SMACNA's "Duct Cleanliness for New Construction Guidelines."
- V. Ductwork connected to intake or discharge louvers will be galvanized steel, apply new coating for the first 10 feet with bitumastic, pitched to a low point, and provided with a 1-1/2" copper drain piped by this trade to a building drain.
- W. A snap lock seam will not be permitted as a substitute for the Pittsburgh lock except for systems with pressure classification +1" and less and where longitudinal joints are sealed and riveted at corners.
- X. Where the trade elects to use two-port tape sealant for joints or similar product, PVC clips are not permitted (use metal) and all corners will be bolted (boltless connectors are not permitted) except where NYC mechanical and building codes permit two-port tape sealant joints as breakaway connection at fire dampers.
- Y. Use gasketed type joint when dissimilar metals are joined.
- Z. All ductwork unless otherwise noted will be hung with 1 in. x 1/8 in. galvanized iron bands. Ductwork with cross sectional area under 4 square feet will be hung on 8'-0 in. centers. For ducts with a cross-sectional area of more than 4 sq. ft. but not over 10 sq. ft. hangers will be no more than 6 feet apart, and for ducts with a cross sectional area of more than 10 sq. ft. hangers will be no more than 4 ft. apart. All hangers will be bent (2" minimum) under the bottom as well as the sides and secured with sheet metal screws.
- AA. Where ducts are stacked they will be independently supported as above or will be supported on minimum 1 1/4" x 1 1/4" x 1/8" angle cradle hung by either 1 1/4" x 1 1/4" x 1/8" angles or 3/8" diameter threaded rod.
- BB. All ductwork will be substantially built with approved joints and seams smooth on the inside and a neat finish on the outside. Duct joints as near air tight as possible, with laps made in the direction of air flow and no flanges projecting into the air stream. Ducts will be adequately braced to prevent vibration. All angles will be galvanized or shop apply new coating with two coats or rust resistant apply new coating.
- CC. Changes in shape and dimension will conform to the following:
 - 1. Increase and reduce duct sizes gradually. Limit transition angle (for each side) to the following:
 - a. For increases in cross-sectional area, the shape of the transformation will not exceed 1" in 7".
 - b. For reductions in area the slope may be 1" in 4" but 1" in 7" is preferred.
- DD. Changes in direction will conform to the following:
 - 1. Unvaned elbow with throat radius not less than 1/2 the width of the duct.
 - 2. Provide square elbows in rectangular ducts where radius elbows will not fit or where specifically noted on drawings. Square elbows with single thickness duct turns will be as per SMACNA with 3-1/4" spacing, and are acceptable in ducts with not more than 2200 FPM air velocity. For higher velocities, use sweep type vanes.



3.3 INSTALLATION OF EXPOSED DUCTWORK

- A. Protect ducts exposed in finished spaces from being dented, scratched, or damaged.
- B. Trim duct sealants flush with metal. Create a smooth and uniform exposed bead. Do not use two-part tape sealing system.
- C. Grind welds to provide smooth surface free of burrs, sharp edges, and weld splatter. When welding stainless steel with a No. 3 or 4 finish, grind the welds flush, polish the exposed welds, and treat the welds to remove discoloration caused by welding.
- D. Maintain consistency, symmetry, and uniformity in the arrangement and fabrication of fittings, hangers and supports, duct accessories, and air outlets.
- E. Remove existing and install new item to be removed during demolition phasesections and finished work that does not comply with these requirements.

3.4 DUCT SEALING

- A. Seal ducts for duct static-pressure, seal classes, and leakage classes specified herein according to SMACNA's "HVAC Duct Construction Standards - Metal and Flexible."
- B. Sealant: Water based elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) specifically for sealing ductwork. Use products as recommended by manufacturer for low, medium or high pressure systems.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Hardcast
 - b. United McGill
 - c. Polymer Adhesives
 - d. Ductmate
 - e. Or Approved Equal
- C. Provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable.
- D. Tape: Use only tape specifically designated by the sealant manufacturer. SMACNA recommends that foil tape not be used and that pressure sensitive tape not be used on bare metal surface or on dry sealant.

3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Chapter 4, "Hangers and Supports."



- B. Building Attachments: Concrete inserts, powder-actuated fasteners, or structural-steel fasteners appropriate for construction materials to which hangers are being attached.
 - 1. Where practical, install concrete inserts before placing concrete.
 - 2. Install powder-actuated concrete fasteners after concrete is placed and completely cured.
 - 3. Do not use powder-actuated concrete fasteners for seismic restraints.
- C. Hanger Spacing: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Table 4-1 (Table 4-1M), "Rectangular Duct Hangers Minimum Size," and Table 4-2,
- D. Hangers Exposed to View: Threaded rod and angle or channel supports.
- E. Support vertical ducts with steel angles or channel secured to the sides of the duct with welds, bolts, sheet metal screws, or blind rivets; support at each floor and at a maximum intervals of 16 feet (5 m).
- F. Install upper attachments to structures. Select and size upper attachments with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

3.6 CONNECTIONS

- A. Make connections to equipment with flexible connectors complying with these specifications.
- B. Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for branch, outlet and inlet, and terminal unit connections.

3.7 PAINTING

- A. Apply new coating interior of metal ducts that are visible through registers and grilles and that do not have duct liner. Apply one coat of flat, black, latex paint over a compatible galvanized-steel primer. apply new coating materials and application requirements are specified in Division 09 painting Section.

3.8 FIELD QUALITY CONTROL

- A. Perform tests and inspections.

3.9 LEAKAGE, TESTING, AIR DISTRIBUTION SYSTEMS

- A. Each air distribution system will be tested for leakage before insulation is applied.
- B. Testing will be done under another section of this work. Refer to section 230593 Testing, Adjusting and Balancing for HVAC for additional requirements.



- C. Provide all necessary personnel to assist in the testing as well as make all provisions for the installation and removal of testing equipment, probes, sensors, etc.
- D. Disassemble, reassemble, and seal segments of systems to accommodate leakage testing and for compliance with test requirements.
- E. Give (7) seven days' advance notice for testing.

3.10 DUCT SYSTEM CLEANLINESS TESTS

- A. Visually inspect duct system to ensure that no visible contaminants are present.
- B. Test sections of metal duct system, chosen randomly by the Commissioner, for cleanliness according to "Vacuum Test" in NADCA ACR, "Assessment, Cleaning and Restoration of HVAC Systems."
 - 1. Acceptable Cleanliness Level: Net weight of debris collected on the filter media will not exceed 0.75 mg/100 sq. cm.
- C. Duct system will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.11 DUCT CLEANING

- A. Clean new and existing duct system(s) before testing, adjusting, and balancing.
- B. Use service openings for entry and inspection.
 - 1. Create new openings and install access panels appropriate for duct static-pressure class if required for cleaning access. Provide insulated panels for insulated or lined duct. Construct or build insulation and liner as recommended by duct liner manufacturer.
 - 2. Disconnect and reconnect flexible ducts as needed for cleaning and inspection.
 - 3. Remove and reinstall ceiling to gain access during the cleaning process.
- C. Particulate Collection and Odor Control:
 - 1. When venting vacuuming system inside the building, use HEPA filtration with 99.97 percent collection efficiency for 0.3-micron-size (or larger) particles.
 - 2. When venting vacuuming system to outdoors, use filter to collect debris removed from HVAC system, and locate exhaust downwind and away from air intakes and other points of entry into building.
- D. Clean the following components by removing surface contaminants and deposits:
 - 1. Air outlets and inlets (registers, grilles, and diffusers).



2. Supply, return, and exhaust fans including fan housings, plenums (except ceiling supply and return plenums), scrolls, blades or vanes, shafts, baffles, dampers, and drive assemblies.
3. Air-handling unit internal surfaces and components including mixing box, coil section, air wash systems, spray eliminators, condensate drain pans, humidifiers and dehumidifiers, filters and filter sections, and condensate collectors and drains.
4. Coils and related components.
5. Return-air ducts, dampers, actuators, and turning vanes except in ceiling plenums and mechanical equipment rooms.
6. Supply-air ducts, dampers, actuators, and turning vanes.
7. Dedicated exhaust and ventilation components and makeup air systems.

E. Mechanical Cleaning Methodology:

1. Clean metal duct systems using mechanical cleaning methods that extract contaminants from within duct systems and remove contaminants from building.
2. Use vacuum-collection devices that are operated continuously during cleaning. Connect vacuum device to downstream end of duct sections so areas being cleaned are under negative pressure.
3. Use mechanical agitation to dislodge debris adhered to interior duct surfaces without damaging integrity of metal ducts, duct liner, or duct accessories.
4. Clean fibrous-glass duct liner with HEPA vacuuming equipment; do not permit duct liner to get wet. Remove existing and install new fibrous-glass duct liner that is damaged, deteriorated, or delaminated or that has friable material, mold, or fungus growth.
5. Clean coils and coil drain pans according to NADCA 1992. Keep drain pan operational. Rinse coils with clean water to remove latent residues and cleaning materials; comb and straighten fins.
6. Provide drainage and cleanup for wash-down procedures.
7. Antimicrobial Agents and Coatings: Apply EPA-registered antimicrobial agents if fungus is present. Apply antimicrobial agents according to manufacturer's written instructions after removal of surface deposits and debris.

3.12 START UP

- A. Air Balance: Comply with requirements in Section 230593 "Testing, Adjusting, and Balancing for HVAC."

3.13 DUCT SCHEDULE

- A. A perforated inner metal liner consisting of 22 ga. galv. Steel with 3/32" dia. Holes on 3/16" or 1/4" centers or the equivalent aluminum will be installed in every one of the following conditions. (Fastening for metal



liners will only be by welded stud. Where duct cross section exceeds 48" the top section will be fastened with twice the amount of clips).

1. Where shown on drawings.
2. Where called for elsewhere in these documents.
3. Where the duct can be walked on, metal liners will be used on bottom portions.
4. Where the velocity in the duct exceeds 3500 FPM.
5. Where Tedlar lining is also provided.

B. Elbow Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Elbows."
 - a. Velocity 1000 fpm (5 m/s) or Lower:
 - 1) Radius Type RE 1 with minimum 0.5 radius-to-diameter ratio.
 - 2) Mitered Type RE 4 without vanes.
 - b. Velocity 1000 to 1500 fpm (5 to 7.6 m/s):
 - 1) Radius Type RE 1 with minimum 1.0 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 0.5 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
 - c. Velocity 1500 fpm (7.6 m/s) or Higher:
 - 1) Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - 2) Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - 3) Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."
2. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-2, "Rectangular Elbows."
 - a. Radius Type RE 1 with minimum 1.5 radius-to-diameter ratio.
 - b. Radius Type RE 3 with minimum 1.0 radius-to-diameter ratio and two vanes.
 - c. Mitered Type RE 2 with vanes complying with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-3, "Vanes and Vane Runners," and Figure 2-4, "Vane Support in Elbows."

C. Branch Configuration:

1. Rectangular Duct: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 2-6, "Branch Connections."



- a. Rectangular Main to Rectangular Branch: 45-degree entry.
 - b. Rectangular Main to Round Branch: Spin in.
2. Round and Flat Oval: Comply with SMACNA's "HVAC Duct Construction Standards - Metal and Flexible," Figure 3-4, "90 Degree Tees and Laterals," and Figure 3-5, "Conical Tees." Saddle taps are permitted in existing duct.
- a. Velocity 1000 fpm (5 m/s) or Lower: 90-degree tap.
 - b. Velocity 1000 to 1500 fpm (5 to 7.6 m/s): Conical tap.
 - c. Velocity 1500 fpm (7.6 m/s) or Higher: 45-degree lateral.

END OF SECTION 23 31 13



THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 233310 - DAMPERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section Includes:
 - 1. Damper terminal strip and wiring
 - 2. Dampers – Trade responsibilities
 - 3. Backdraft and pressure relief dampers.
 - 4. Dampers for balancing
 - 5. Dampers for Fire Protection
 - 6. Fire dampers
 - 7. Combination fire and smoke dampers

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.4 REFERENCE STANDARDS

- A. AMCA 500 - Test Methods for Louvers, Dampers and Shutters.
- B. AMCA 511 - Certified Ratings Program for Air Control Devices.
- C. NFPA 90A - Installation of Air Conditioning and Ventilating Systems.
- D. NFPA 90B – Installation of Warm Air Heating and Air Conditioning Systems
- E. NFPA 92A - Smoke-Control Systems.



- F. NFPA 92B – Smoke Control Systems in Atria, Covered Malls, and Large Areas.
- G. NFPA 101 – Life Safety Code.
- H. UL 555 - Standard for Safety; Fire Dampers.
- I. UL 555S - Standard for Safety; Leakage Rated Dampers for Use in Smoke Control Systems.
- J. SMACNA – HVAC Duct Construction Standards, Latest Edition.
- K. BSA - City of New York, Department of Buildings, Board of Standards and Appeals.
- L. MEA – City of New York, Department of Buildings, Material and Acceptance Division.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.
- B. Comply with NFPA 90A, "Installation of Air Conditioning and Ventilating Systems," and with NFPA 90B, "Installation of Warm Air Heating and Air Conditioning Systems."
- C. Comply with AMCA 500-D testing for damper pressure drop rating.
- D. Dampers will be licensed to bear the AMCA Certified Ratings Seal. Ratings based on tests and procedures performed in accordance with AMCA 511 and comply with AMCA Certified Ratings Program. AMCA Certified Ratings Seal applies to Air Performance and Air Leakage.

1.6 SUBMITTALS

A. General

- 1. Detail duct accessories fabrication and installation in ducts and other construction. Include dimensions, weights, loads, and required clearances; and method of field assembly into duct systems and other construction. Include the following:
 - a. Dampers:
 - 1) Verify Conformance to NFPA, UL, BSA, MEA and NYC mechanical and building codes.
 - 2) Indicate materials, construction, and dimensions.
 - 3) Include damper pressure drop data for all damper sizes in accordance with AMCA 500-D test figure 5.3 (Ducted Inlet, Ducted Outlet).
 - 4) Indicate damper leakage meets AMCA Class 1A in accordance with AMCA 500-D.



- 5) Indicate damper is licensed to bear the AMCA Certified Ratings Seal for Air Performance and Air Leakage.
 - 6) Include a copy of the Installation Instructions.
- b. Special fittings.
 - c. Manual volume damper installations.
 - d. Control damper installations.
 - e. Fire-damper, smoke-damper, combination fire/smoke-damper, ceiling, and corridor damper installations, including sleeves; and duct-mounted access doors and remote damper operators.
 - f. Duct security bars.
 - g. Wiring Diagrams: For power, signal, and control wiring.
2. Clearly indicate location, size and rating of all dampers on the shop drawings and will provide access doors in the ducts at each damper of sufficient size (min. 12" x 12") and type to permit inspection and remove existing and install new of linkage or actuator. Provide itemized list (indicating size, location and type) of all fire, smoke and combination fire/smoke dampers for inspection. Coordinate all locations of duct access doors.
 3. Provide installation detail showing the damper mountings as well as duct transitions, if required, to maintain the 100% damper free area in the ductwork.
 4. Include damper manufacturer's installation instructions. These instructions will describe the applicable requirements for damper sleeve thickness, retaining angles, sealing, duct to sleeve connections, preparation of wall, floor or ceiling openings, and all other requirements to provide an installation equivalent to that tested by the damper manufacturer during the UL 555, UL 555S and UL 555C qualification process. Detail any propose deviations. Any deviations must be approved by the Commissioner.
- B. Operation and service by client agency
 - C. Data: For air duct accessories to include in operation and service by client agency manuals.

1.7 DEFINITIONS

- A. Sealing Requirements Definition: For the purposes of duct systems sealing requirements specified in this section, the following definitions apply:
 1. Seams: A seam is defined as jointing



PART 2 - PRODUCTS

2.1 GENERAL

- A. Fusible link dampers for fire protection, manual dampers for balancing and/or shut-off as well as dampers which are specified as part of factory built air handling units or terminal units will be furnished by the Contractor. Install all dampers.
- B. Type "B" or "C" mountings will be used for all dampers. Type "A" mountings are not permitted. All dampers are to be selected and installed so that the frames, stops, etc. are located outside of the airstream so as to provide a nominal 100% free area damper.
- C. Dampers will be installed per the condition of their UL listing and the manufacturer's installation instructions. The maximum single damper assembly whether single or multi-section will not exceed the limit as certified by UL. Where multiple assemblies are required, provide UL approved mullions.
- D. Furnish damper actuators for all dampers that are being furnished. Where practical, actuators will be factory mounted by the damper manufacturer. The actuators will be located outside of the airstream. Provide a terminal strip alongside the damper for all dampers being furnished.
- E. Wiring for motor operated dampers that have a fire and/or smoke rating will be provided by the mechanical trade from the damper actuator and any associated end switches and sensors to a terminal strip that is wall mounted alongside the damper.
- F. Provide wiring as follows:
 - 1. Between the central control system BMS and the terminal strip for all dampers monitored and/or controlled by the BMS whether or not the Contractor has furnished the damper.
 - 2. Between the terminal strip for all dampers and their associated thermostats, pressure switches, etc. whether or not the Contractor has furnished the damper.
- G. Multi-section dampers with electric actuators will be arranged so that each damper section operates individually. One electronic actuator will be direct shaft mounted per damper section. (See below execution section for more installation details.)
- H. Dampers incorporating multiple sections will be designed in such a way that the actuators are easily accessible. Under no circumstances will it be necessary to remove damper sections or structural or other fixtures to facilitate removal of damper motors. Provide access doors wherever necessary to meet this requirement.
- I. Multi-blade type, with parallel blades for two-position, throttling and modulating service will be provided. Damper blades or frames will not distort or rack under operation.
- J. For inaccessible ceilings, as well as for special areas such as lobbies, etc., furnish remote damper actuator operable through face of nearest diffuser. Damper controller and cable will be concealed above the ceiling.

Balancing dampers will include all necessary hardware to ensure compatibility with remote cable control system.

2.2 DAMPER TERMINAL STRIPS AND WIRING

- A. Terminal strip(s) will be provided alongside all motorized dampers.
- B. Where dampers are furnished, provide relays, interconnect wiring and other components to meet the requirements detailed below. The terminal strip(s) relays, etc. will be housed in wall-mounted enclosures, which meet the specifications detailed for local starter enclosures.
- C. The terminal strip will be wired such that the Building Management System (BMS) can undertake the following control and monitoring functions:
 - 1. Open Control - A pair of terminals will be wired such that when a controls relay closes a contact pair across these terminals the damper is driven open. If the damper is two position with an actuator which drives closed and springs open on loss of power then these terminals will not be used. Where dampers are interlocked to motors then the wiring will be to these terminals.
 - 2. Close Control - A pair of terminals will be wired such that when a controls (BMS) relay closes a contact pair across these terminals the damper is driven closed. If the damper is two positions with an actuator which drives open and springs closed on loss of power then these terminals will not be used. This signal from the BMS will be overridden by an open signal from the FAS.
 - 3. Motor Interlock - A pair of terminals will be wired to an end switch on the actuator such that the contacts between the terminals will be closed when the damper is fully open and open when the damper is not fully open. This pair of terminals will be used for interlocking a damper with a motor such that the motor will not be able to start if the damper is not fully open.
- D. Smoke Evacuation Dampers
 - 1. For each damper, the damper actuator, heat sensor and end switches will each be wired by the mechanical trade to a terminal strip(s) mounted adjacent to the damper so that the FAS can undertake the following control and monitoring functions:
 - a. FAS “Open/Close” Control - The damper will be driven open in response to closure of an FAS relay contact and will spring closed in response to opening of this relay contact.
 - b. FAS “Override Open” Control (Smoke Evacuation Dampers Only) - The damper will be reopened, subsequent to a heat sensor initiated closure, in response to closure of a second FAS relay contact (or reclosure of the first contact for single sensor dampers).
 - c. FAS “Open/Closed” Status Monitoring Control (Smoke Evacuation Dampers Only) - End Switch closures will cause activation of FAS “opened” and “closed” relays in response to operation of end switches at both ends of travel.



- d. FAS “Override of BMS” Control - For each damper requiring both FAS and BMS control, the Contractor will mount an interface relay within 30 circuiting feet of the damper terminal strip, so wired as to permit FAS override of the BMS control.
- E. Damper manufacturer will provide all necessary wiring diagrams.
- F. Comply with NYC mechanical, building and electrical code requirements. Segregate high and low voltage wiring & circuits and segregate the FAS and controls BMS terminals.

2.3 DAMPERS – TRADE RESPONSIBILITIES

- A. The following summarizes the trade responsibilities with respect to automatic dampers:
 - 1. Non-Fire or non-Smoke Rated Dampers
 - a. Furnish Damper - BMS
 - b. Install damper – HVAC
 - c. Furnish Actuator – BMS
 - d. Install Actuator – HVAC
 - e. Provide terminal strip complete with all relays, wiring, etc. – BMS
 - f. Provide wiring between actuator, end switches, sensors, and terminal strip – BMS
 - g. Provide wiring from BMS to damper terminal strip - BMS
 - h. Provide wiring from FAS to damper terminal strip - N/A
 - i. Furnish 120V main power to elect. Actuators – BMS
 - j. Provide wiring from damper terminal strip to terminal strips for interlocked motors, etc. – BMS
 - k. Provide wiring from damper terminal strip directly to thermostats, etc. – BMS
 - 2. Fire and/or Smoke Rated Dampers not controlled by Fire Alarm system (FAS)
 - a. Furnish Damper - HVAC
 - b. Install damper – HVAC
 - c. Furnish Actuator – HVAC
 - d. Install Actuator – HVAC
 - e. Furnish and install terminal strip complete with all relays, wiring, etc. – HVAC
 - f. Provide wiring between actuator, end switches, heat sensors, and terminal strip – HVAC
 - g. Provide wiring from Central Control System (BMS) to damper terminal strip – BMS
 - h. Provide wiring from FAS to damper terminal strip – N/A
 - i. Furnish 120V main power to elect. Actuators – BMS
 - j. Provide wiring from damper terminal strip to terminal strips for interlocked motors, etc. – BMS
 - k. Provide wiring from damper terminal strip directly to thermostats, etc.- BMS
- B. Coordinate all of the work and the operation of the damper/actuator installation.
- C. In mechanical rooms 120V power circuits will be provided from an emergency distribution board. These circuits will be terminated in a junction box located in each associated mechanical room and will be used to supply local control panels and critical equipment.



- D. These circuits will also be used by the electrical trade to supply dampers, etc., and requiring control. Final connection from the terminal strips to the actuators, end switches and sensors will be by the mechanical trade.
- E. For dampers not requiring control by the fire alarm system and for other non-critical equipment, obtain power from either the emergency circuits as detailed above or from the motor starter terminal trip.

2.4 BACKDRAFT AND PRESSURE RELIEF DAMPERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1. Ruskin Company
- 2. Air Balance Inc.; a division of Mestek, Inc.
- 3. Imperial
- 4. Pottorff; a division of PCI Industries, Inc.
- 5. Or Approved Equal

- B. Description: Gravity balanced.

- 1. Maximum Air Velocity: 500 fpm.
- 2. Maximum Pressure drop: 0.10" w.g.
 - 1. Maximum System Pressure: 2-inch w.g (0.5 kPa).
 - 2. Frame: 0.063-inch- (1.6-mm-) thick extruded aluminum, with welded corners and mounting flange.
 - 3. Blades: Multiple single-piece blades, center-pivoted, maximum 6-inch (150-mm) width, 0.050-inch- (1.2-mm-) thick aluminum sheet with sealed edges.
 - 4. Blade Action: Parallel.
 - 5. Blade Seals: Neoprene, mechanically locked.
 - 6. Blade Axles:
 - a. Material: Aluminum.
 - b. Diameter: 0.20 inch (5 mm).
 - 7. Tie Bars and Brackets: Aluminum.
 - 8. Return Spring: Adjustable tension.
 - 9. Bearings: Steel ball.



10. Accessories:
 - a. Adjustment device to permit setting for varying differential static pressure.
 - b. Counterweights and spring-assist kits for vertical airflow installations.
 - c. Electric actuators.
 - d. Chain pulls.
 - e. Screen Mounting: Front mounted in sleeve.
 - f. Sleeve Thickness: 20-gage (1.0-mm) minimum.
 - g. Sleeve Length: 6 inches (152 mm) minimum.
 - h. Screen Mounting: Rear mounted.
 - i. Screen Material: Aluminum
 - j. Screen Type: Insect
 - k. 90-degree stops.

2.5 DAMPERS FOR BALANCING

A. Low-Leakage, Steel, Manual Volume Damper

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Ruskin Company
 - b. Imperial.
 - c. Trox USA
 - d. Pottorff; a division of PCI Industries, Inc.
 - e. Or Approved Equal
2. Low-leakage rating, with linkage outside airstream, and bearing AMCA's Certified Ratings Seal for both air performance and air leakage.
3. Suitable for horizontal or vertical applications.

B. General Volume Damper Requirements:

1. Provide factory fabricated manual volume dampers in all supply, return and exhaust branch ducts for properly regulating and balancing airflow to all terminal outlets, whether indicated on drawings or not. Dampers will be constructed per SMACNA, latest edition, figures 2-12 and 2-13 with locking quadrant and 8" maximum blade width.
2. Volume dampers will be controlled by an approved galvanized locking quadrant indicating the damper position.
3. When installing dampers in ducts to be insulated provide raised bracket for damper quadrant with height equal to insulation thickness such that the adjustment of the damper handle will not disturb the insulation.
4. Locate damper as far as possible from air outlet to avoid noise transmission.



5. Coordinate with General Construction trades for easy access to damper.
6. Dampers in stainless steel ductwork will be of stainless steel construction.
7. Frames:
 - a. Galvanized-steel channels, 0.064 inch (1.62 mm) thick.
 - b. Mitered and welded corners.
 - c. Flanges for attaching to walls and flangeless frames for installing in ducts.
8. Blades:
 - a. Multiple or single blade.
 - b. Parallel- or opposed-blade design.
 - c. Stiffen damper blades for stability.
 - d. Galvanized, roll-formed steel, 0.064 inch (1.62 mm) thick.
 - e. Maximum 6-inch width.
9. Blade Axles: Aluminum.
10. Bearings:
 - a. Stainless-steel sleeve.
 - b. Dampers in ducts with pressure classes of 3-inch w.g (750 Pa) or less will have axles full length of damper blades and bearings at both ends of operating shaft.
11. Blade Seals: Neoprene.
12. Jamb Seals: Cambered aluminum.
13. Tie Bars and Brackets: Galvanized steel.
14. Accessories:
 - a. Include locking device to hold single-blade dampers in a fixed position without vibration.

2.6 DAMPERS FOR FIRE PROTECTION - GENERAL

- A. Dampers and fire doors for fire protection will be installed where shown on the drawings and where required by code and will be of the folding blade type.
- B. Dampers will bear the UL label and will be provided with factory installed UL rated full sleeves. Comply with UL recommendations for break-away connections at maximum distance of 6" from wall and all other UL recommendations and code requirements. Retaining angles must be wide enough to have sufficient bearing on wall (minimum surface contact) of 1".



- C. For installation in 1-1/2 Hr. or 2 Hr. fire separations of fire divisions provide 1-1/2 hour fusible link fire dampers U.L. labeled for use in Class B openings. For installation in 3 or 4 hour fire separations or fire divisions provide two fire dampers in series U.L. labeled for use in Class A openings, or other U.L. classified damper rated for 3 hrs.
- D. Damper blades and frame will be out of airstream, NYC mechanical and building codes to provide nominal 100% free area dampers and to minimize pressure drops.
- E. Dampers must be approved as per requirements of the NYC Mechanical and Building Codes. NYC Mechanical and Building Codes will take precedence where they supersede NFPA. Notify the Commissioner in writing citing such differences by reference to such codes should the contract documents not reflect these differences.
- F. Provide duct access doors at each damper of sufficient size and type to permit inspection and remove existing and install new of linkage. Coordinate all locations for duct access doors.
- G. Access doors will be cam latched with vinyl gasket to provide tightest possible seal between the duct and frame. Doors will be self-tightening and gasketed with hand operated cam locks and will be fully insulated.
- H. Units will be MEA and Board of Standards and Appeals for use in New York City.

2.7 FIRE DAMPERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Ruskin Company
 - 2. Greenheck Fan Corporation
 - 3. McGill AirFlow LLC
 - 4. Nailor Industries Inc.
 - 5. Pottorff; a division of PCI Industries, Inc.
 - 6. Prefco; Perfect Air Control, Inc.
 - 7. Or Approved Equal
- B. Type: Static and dynamic rated and labeled according to UL 555 by an NRTL.
- C. Closing rating in ducts up to 4-inch w.g. static pressure class and minimum 4000-fpm velocity.
- D. Fire Rating: 1-1/2 hours.
- E. Frame: Curtain type with blades outside airstream; fabricated with roll-formed, 0.034-inch- (0.85-mm-) thick galvanized steel; with mitered and interlocking corners.

- F. Mounting Sleeve: Factory- installed, galvanized sheet steel, UL approved.
- G. Minimum Thickness: 0.138 inch thick, and of length to suit application.
- H. Mounting Orientation: Vertical or horizontal as indicated.
- I. Blades: Roll-formed, interlocking, 0.034-inch- (0.85-mm-) thick, galvanized sheet steel. In place of interlocking blades, use full-length, 0.034-inch- (0.85-mm-) thick, galvanized-steel blade connectors.
- J. Horizontal Dampers: Include blade lock and stainless steel closure spring with locking devices to ensure closure.
- K. Heat-Responsive Device: Fusible link, factory installed, 212 deg F (100 deg C) rated.

2.8 COMBINATION FIRE AND SMOKE DAMPERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Imperial
 - 2. Ruskin Company
 - 3. Pottorff
 - 4. Or Approved Equal
- B. All dampers will be provided with position indicator switches to enable remote status of open or closed positions. However, only those dampers designated in the documents as being controlled by the central fire alarm system (or central fire command station) will be wired for remote status and remote open/closed operation.
- C. Damper length will not exceed UL approved damper size. Provide intermediate supports and bearings for damper blades, as required.
- D. Dampers that are controlled from a central fire command station will be provided with the following:
 - 1. A 212 deg F heat sensor with normally closed contacts (manual reset) to close and lock damper, if open.
 - 2. Dampers will be factory equipped with a second normally close heat sensor correlating to the operator/actuator degradation temperature classification (250 deg F to 350 deg F depending on actuator used). The second sensor is wired through a manual override switch on the central fire command station.
 - 3. Dampers that are not controlled from a central fir command station will have a fusible link that melts on heat causing the damper to close and lock in a closed position.



- E. The damper manufacturer will provide the damper actuators. If dampers are pneumatically actuated, then the damper manufacturer will provide EP switch.
- F. Dampers will have UL label and be provided with factory installed UL-rated sleeves.
- G. Type: Static and dynamic rated and labeled according to UL 555 and UL 555S.
- H. Closing rating in ducts up to 4-inch w.g. static pressure class and minimum 4000-fpm velocity.
- I. Fire Rating: 1-1/2 hours in accordance with UL555.
- J. Temperature rating: 350 deg F
- K. Frame: Multiple-blade type; fabricated with roll-formed, 0.034-inch- (0.85-mm-) thick galvanized steel; with mitered and interlocking corners.
- L. Heat-Responsive Device: See above.
- M. Smoke Detector: Integral, factory wired for single-point connection.
- N. Blades: Roll-formed, opposed, horizontal, interlocking, minimum 14 gauge (2.0 mm) thick, galvanized sheet steel. In place of interlocking blades, use full-length, 0.034-inch- (0.85-mm-) thick, galvanized-steel blade connectors.
- O. Bearings: Self-Lubricating, stainless steel sleeve.
- P. Leakage: Class I in accordance with UL555S.
- Q. Rated pressure and velocity to exceed design airflow conditions.
- R. Mounting Sleeve: Factory-installed, UL rated, stainless sheet steel; length to suit wall or floor application with factory-furnished silicone caulking.
- S. Master control panel for use in dynamic smoke-management systems.
- T. Damper Motors: Modulating action.
 - 1. Motor Sizes: Sized so driven load will not require motor to operate in service factor range above 1.0.
 - 2. Permanent-Split-Capacitor or Shaded-Pole Motors: With oil-immersed and sealed gear trains.
 - 3. Outdoor Motors and Motors in Outdoor-Air Intakes: Equip with O-ring gaskets designed to make motors weatherproof. Equip motors with internal heaters to permit normal operation at minus 40 deg F (minus 40 deg C).

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Install duct accessories according to applicable details in SMACNA's "HVAC Duct Construction Standards - Metal and Flexible" for metal ducts.
- B. All dampers are to be selected and installed with duct transitions so that the damper clear open area (including frames, stops, etc.) equals to or exceeds the connecting duct (inlet and outlet) clear free area (duct inside clear dimensions). The Contractor will furnish and install all required duct transition segments.
- C. Install duct accessories of materials suited to duct materials; use galvanized-steel accessories in galvanized-steel and stainless steel accessories in stainless-steel ducts, and aluminum accessories in aluminum ducts.
- D. Install control dampers at inlet of exhaust fans or exhaust ducts as close as possible to exhaust fan unless otherwise indicated.
- E. Install volume dampers at points on supply, return, and exhaust systems where branches extend from larger ducts. Where dampers are installed in ducts having duct liner, install dampers with hat channels of same depth as liner, and terminate liner with nosing at hat channel.
- F. Install steel volume dampers in steel ducts.
- G. Install aluminum volume dampers in aluminum ducts.
- H. Set dampers to fully open position before testing, adjusting, and balancing.
- I. Install test holes at fan inlets and outlets and elsewhere as indicated.
- J. Install fire, smoke and combination fire/smoke dampers according to UL listing.
- K. Install duct access doors on sides of ducts to allow for inspecting, adjusting, and maintaining accessories and equipment at the following locations:
 - 1. Downstream from manual volume dampers, control dampers, backdraft dampers, and equipment.
 - 2. Adjacent to and close enough to fire, smoke and combination fire/smoke dampers, to reset or reinstall fusible links or service dampers.
 - 3. Access doors for access to fire or smoke dampers having fusible links will be pressure relief access doors and will be outward operation.



- L. Install access doors with swing against duct static pressure.
- M. Access Door Sizes: minimum 14" x 14".
- N. Label access doors according to indicate the purpose of access door.

3.3 FIELD QUALITY CONTROL

- A. Tests and Inspections:
 1. Operate dampers to verify full range of movement.
 2. Inspect locations of access doors and verify that purpose of access door can be performed.
 3. Operate fire, smoke, and combination fire and smoke dampers to verify full range of movement and verify that proper heat-response device is installed.
 4. Inspect turning vanes for proper and secure installation.
 5. Operate remote damper operators to verify full range of movement of operator and damper.

END OF SECTION 23 33 10



SECTION 23 37 13 - DIFFUSERS, REGISTERS AND GRILLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This section includes the following:
1. Square panel diffusers.
 2. Linear slot diffusers
 3. Radial Air Pattern Diffuser
 4. Panel face diffuser
 5. Grilles and Registers
- B. Related Sections:
1. Section 23 05 93 – Testing, Adjusting and Balancing for HVAC
 2. Section 23 31 13 – Metal Ducts.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 “Submittal Procedures”.

1.4 REFERENCE STANDARDS

- A. All air distribution equipment will be designed, manufactured and tested in accordance with the latest applicable industry standards including the following:
1. SMACNA
 2. ASHRAE - Test and rate air devices in accordance with ASHRAE Standard 70-2006.
 3. ARI – Test and rate air devices in accordance with ARI Standards.
 4. ADC Seal – Provide devices bearing ADC Certified Rating Seal.
 5. AMCA Compliance: Test and rate air devices in accordance with AMCA Standards and will bear AMCA Certified Seal.
 6. NFPA Compliance: Install air devices in accordance with NFPA90A “Standard for the Installation of Air Conditioning and Ventilating Systems.”
- B. All equipment and material to be furnished and installed as part of this work will be UL or ETL listed, in accordance with the requirements of the NYC mechanical and building code and suitable or its intended use.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 “Quality Requirements”.



1.6 SUBMITTALS

- A. Product Data: For each type of product indicated, include the following:
 - 1. Data Sheet: Indicate materials of construction, finish, and mounting details; and performance data including throw and drop, static-pressure drop, and noise ratings.
 - 2. Diffuser, Register, and Grille Schedule: Indicate drawing designation, room location, quantity, model number, size, and accessories furnished.
- B. Manufacturer will submit engineering data in a manner to facilitate convenient review of the following factors:
 - 1. Throw, terminal velocity, noise criteria (NC), sound power, static pressure and total pressure of each type and size of air outlet.
 - 2. Supply air units will distribute the specified quantity of air evenly throughout the occupied zone uniformly, draftlessly and noiselessly. Sound levels will not exceed ratings as required in the "Acoustical Treatment" section of these specifications.
- C. The manufacturer will provide published performance data for the diffusers, registers and grilles. They will be tested in accordance with ANSI/ASHRAE Standard 70-2006.
- D. Samples for Initial Selection: For diffusers, registers, and grilles with factory-applied color finishes.
- E. Samples for Verification: For diffusers, registers, and grilles, in manufacturer's standard sizes to verify color selected.
- F. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from Installers of the items involved:
 - 1. Ceiling suspension assembly members.
 - 2. Method of attaching hangers to building structure.
 - 3. Size and location of initial access modules for acoustical tile.
 - 4. Ceiling-mounted items including lighting fixtures, diffusers, grilles, speakers, sprinklers, access panels, and special moldings.
 - 5. Duct access panels.
- G. Source quality-control reports.

1.7 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver air distribution devices wrapped in factory-fabricated fiber-board type containers. Identify on outside of container type of device and location to be installed. Avoid crushing or bending and prevent dirt and debris from entering and settling in devices.
- B. Store air outlets and inlets in original cartons and protect from weather and construction work traffic. Where possible, store indoors, when necessary to store outdoors, store above grade and enclose with waterproof wrapping.



PART 2 - PRODUCTS

2.1 DIFFUSERS, REGISTERS AND GRILLES - GENERAL

- A. Subcontractor will furnish and install where shown on the drawings all air devices, diffusers, grilles and registers of the sizes, types and capacities indicated and as required for proper distribution of conditioned air within the conditioned spaces and for return of conditioned air from the conditioned spaces to the various air conditioning systems. Exhaust grilles and registers will also be provided where indicated on the drawings and as required for the proper flow of exhaust air.
- B. Devices will be aluminum or steel, as specified by the Commissioner and will be factory finished with baked enamel finish or extruded aluminum finish of color selected by Commissioner.
- C. Air inlets and outlets will be tested in accordance with ASHRAE 70.
- D. Throw, horizontal distance from the diffuser to the point where the theoretical centerline velocity is 50 feet per minute, will not exceed the horizontal distance between the diffuser and the nearest wall, or half the horizontal distance between ceiling diffusers.
- E. For devices installed in plaster construction, supply plaster frames as required for setting. All design and margin construction will be coordinated with architectural requirements. Plaster frames where required will be constructed of same material and finish as air terminal.
- F. The air outlet manufacturer will review architectural plans and will be responsible for furnishing all air outlets with mounting frames and margins that are fully compatible with ceiling construction.
- G. All ceiling diffusers will be furnished and installed with an equalizing deflector and volume damper. If diffuser is to be used for return air, omit equalizing deflector. Supply diffusers will be designed to protect ceilings from streaking and smudging. Blank-off or sectorizing baffles will be furnished as indicated.
- H. For VAV systems, devices will be specifically designed for variable-air-volume flows.
- I. Coordinate duct connections with coordination drawings.

2.2 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Titus
 - 2. Anemostat
 - 3. Price
 - 4. Or approved equal.

2.3 DIFFUSERS - GENERAL

- A. Diffusers will be constructed with quick positioning pattern control permitting 180-degree air pattern adjustment.



- B. Diffusers will have dampers which operate separate from pattern control. Inner pattern control and brackets will be black coated.
- C. Slot opening will be as shown on plans.
- D. Throw terminal velocity, noise criteria (NC), sound power, static pressure and total pressure of each type and size of air outlet.

2.4 SQUARE PANEL DIFFUSER

- A. The face panel is removable by means of four hanger brackets. The exposed surface of the face panel will be smooth, flat, and free of visible fasteners.
- B. The airflow discharge pattern will be field adjustable from horizontal to vertical by repositioning the plaque assembly using the adjustment screws. The plaque assembly will be constructed as a single inner assembly and must be easily removable using a spring lock mechanism.
- C. The back of the face panel will have an aerodynamically shaped, rolled edge to ensure a tight horizontal discharge pattern.
- D. A single metal thickness on the edges of the face panel will not be accepted. Ceiling diffusers with a 24 x 24-inch full face will have no less than an 18 x 18-inch face panel size. Ceiling diffusers with a 12 x 12-inch full face will have no less than a 9 x 9-inch face panel size.
- E. The back pan will be one-piece precision die-stamped and will include an integrally drawn inlet (welded-in inlets and corner joints are not acceptable). The diffuser back pan will be constructed of 22-gauge steel. The diffuser neck will have a minimum of 1^o-inch depth available for duct connection.
- F. The finish will be #26 white. The finish will be an anodic acrylic paint, baked at 315 deg F for 30 minutes. The pencil hardness must be HB to H.
- G. The paint must pass a 100-hour ASTM B117 Corrosive Environments Salt Spray Test without creepage, blistering or deterioration of film. The paint must pass a 250-hour ASTM D870 Water Immersion Test. The paint must also pass the ASTM D2794 Reverse Impact Cracking Test with a 50-inch pound force applied.
- H. Damper will be constructed of heavy gauge steel and will have radially opposed blades. Damper must be operable from the face of the diffuser. Directional Blow clips will be available to restrict the discharge air in certain directions.
- I. Molded insulation blanket will be provided for each supply diffuser to prevent condensation. The insulation will be R-6, foil-backed with vapor barrier and provide an additional 1-inch gap around the neck to install insulated duct.
- J. Accessories:
 - 1. Equalizing grid.
 - 2. Safety chain.
 - 3. Sectorizing baffles.



- K. The manufacturer will provide published performance data for the square panel diffuser. The diffuser will be tested in accordance with ANSI/ASHRAE Standard 70-1991.

2.5 RECTANGULAR AND SQUARE CEILING

- A. Furnish and install Adjustable Stamped Architectural Square or rectangular ceiling diffusers. The diffuser will be manufactured from corrosion resistant steel and incorporate four die-formed concentric cones. Diffuser will have an adjustable sliding type inner cone assembly that is securely retained by a spring-loaded friction arrangement. The inner core assembly is to be removable using a spring clip arrangement. The diffuser will have a removable plug for screwdriver adjustment of damper without removing the core.

1. Face Size: Refer to drawings.
2. Mounting: Refer to drawings.
3. Pattern: Adjustable.
4. Dampers: Radial opposed blade.
5. Accessories:
 - a. Equalizing grid.
 - b. Safety chain.
 - c. Sectorizing baffles.
 - d. Operating rod extension.
 - e. External Foil Back Insulation

- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Titus
2. Price
3. Anemostat
4. Or approved equal.

2.6 LINEAR SLOT DIFFUSER

- A. Furnish and install Linear Slot Diffusers of the sizes and capacities as indicated in the contract documents. The slot diffusers with slot spaces of the sizes shown on the plans and schedules.
- B. The maximum length of a single section will be 72” long. All sizes longer than 72” will be provided in continuous multiple sections. Alignment strips are to be provided for joining continuous diffuser sections.
- C. The manufacturer will provide all alignment components. The return models will be constructed the same as the supply diffusers without the pattern controllers.
- D. The linear will be supplied in 1 – 8 slots wide as specified. Pattern control deflectors will have an aerodynamic “ice tong” shape that can be adjusted to regulate the volume and direction of the airflow from the face of the diffuser. Deflector will be capable of 180 ° pattern adjustment. The maximum length of the deflectors will be 24”. Longer sizes will be provided in multiple sections. The pattern deflector finish will be black.
- E. Optional diffuser curving to a 6-foot minimum radius with fixed deflection will be available as required.
- F. The frame and support bars will be constructed of heavy gauge extruded aluminum.



- G. Heavy gauge extruded aluminum end borders; end caps and mitered corners will be available to close off the ends of the diffusers.
- H. Provide factory fabricated and installed plenums for all linear slot diffusers. Plenums will be manufactured by the same manufacturer of the linear slot diffusers. The plenums will include side inlet for connection to duct. The width will fit the linear slot diffuser as specified and the length will be in standard nominal lengths. When continuous sections are required, end caps will be folded up to provide uninterrupted airflow.
- I. Plenums will have internal insulation with polymer film and perforated panels. Insulation will be as specified under another section of this work.
 - 1. Material - Shell: insulated. Insulation will be as specified under another section of this work
 - 2. Material - Pattern Controller and Tees: Aluminum.
 - 3. Finish - Face and Shell: Baked enamel, color selected by Commissioner.
 - 4. Finish - Pattern Controller: Baked enamel, black.
 - 5. Finish - Tees: Baked enamel, color selected by Commissioner.
 - 6. Slot Width: Refer to Drawings
 - 7. Number of Slots: Refer to Drawings.
 - 8. Length Refer to Drawings.
 - 9. Accessories: Refer to architectural ceiling plans.

2.7 GRILLES AND REGISTERS

A. Return Air Grilles

- 1. Return air grilles will be 3/4" blade spacing and 1/2" blade spacing.
- 2. The fixed deflection blades will be parallel to the long or short dimension of the grille.
- 3. Construction material: Extruded aluminum with 1-1/4" wide border on all sides.
- 4. Corners will be welded with full penetration resistance welds.
- 5. Deflection blades will be contoured to a specifically designed and tested cross section to meet test performance data.
- 6. Opposed blade damper will be constructed of heavy gauge steel or aluminum. Damper must be operable from face of the grille.

B. Transfer Grilles:

- 1. Will match return grilles in appearance.

2.8 SOURCE QUALITY CONTROL

- A. Verification of Performance: Rate diffusers, registers, and grilles according to ASHRAE 70, "Method of Testing for Rating the Performance of Air Outlets and Inlets."

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.



3.2 EXAMINATION

- A. Examine areas where diffusers, registers, and grilles are to be installed for compliance with requirements for installation tolerances and other conditions affecting performance of equipment.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. The air outlet manufacturer will review architectural plans and will be responsible for furnishing all air outlets with mounting frames and margins that are fully compatible with ceiling construction.

3.3 INSTALLATION

- A. Install diffusers, registers, and grilles level and plumb.
- B. Ceiling-Mounted Outlets and Inlets: Drawings indicate general arrangement of ducts, fittings, and accessories. Air outlet and inlet locations have been indicated to achieve design requirements for air volume, noise criteria, airflow pattern, throw, and pressure drop. Make final locations where indicated, as much as practical. For units installed in lay-in ceiling panels, locate units in the center of panel. Where architectural features or other items conflict with installation, notify Commissioner for a determination of final location.
- C. Install diffusers, registers, and grilles with airtight connections to ducts and to allow service and maintenance of dampers, air extractors, and fire dampers.

3.4 ADJUSTING

- A. After installation, adjust diffusers, registers, and grilles to air patterns indicated, or as directed, before starting air balancing.

END OF SECTION 23 71 13



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260510 - BASIC ELECTRICAL MATERIALS AND METHOD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Raceways.
 - 2. Building wire and connectors.
 - 3. Cutting and patching for electrical construction.
 - 4. Touchup painting.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. FMC: Flexible metal conduit.
- C. IMC: Intermediate metal conduit.
- D. LFMC: Liquid tight flexible metal conduit.
- E. RNC: Rigid nonmetallic conduit (Schedule 80 PVC).
- F. NRTL: Nationally Recognized Testing Laboratory.

1.5 SUBMITTALS

- A. Shop Drawings: Dimensioned plans and sections or elevation layouts of electricity metering equipment.
- B. Field Test Reports: Indicate and interpret test results for compliance with performance requirements.

1.6 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".



- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable per the NYC mechanical and building code requirements and marked for the intended use (NRTL).
- C. Comply with the current edition of NYC's Electrical Code.

1.7 COORDINATION

- A. Coordinate chases, slots, inserts, sleeves, and openings with general construction work and arrange in building structure during the progress of construction to facilitate the electrical installations that follow.

PART 2 - PRODUCTS

2.1 TOUCHUP PAINT

- A. For Equipment: The equipment manufacturer's paint is selected to match the installed equipment finish.
- B. Galvanized Surfaces: Zinc-rich paint recommended by item manufacturer.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 ELECTRICAL EQUIPMENT INSTALLATION

- A. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide the maximum possible headroom.
- B. Materials and Components: Install level, plumb, and parallel and perpendicular to other building systems and components, unless otherwise indicated.
- C. Equipment: Install to facilitate service, maintenance, and repair and restore or replacement of components. Connect for ease of disconnecting, with minimum interference with other installations.

Right of Way: Give to raceways and piping systems installed at a required slope.

3.3 FIRESTOPPING

- A. Apply firestopping to cable and raceway penetrations of fire rated floor and wall assemblies to achieve fire resistance rating of the assembly. Firestopping materials and installation requirements are specified in Division 07 Section "Firestopping."

3.4 CUTTING AND PATCHING

- A. Cut, channel, chase, and drill floors, walls, partitions, ceilings, and other surfaces required to permit electrical installations. Perform cutting by skilled mechanics of trades involved.



- B. Repair and restore and refinish disturbed finish materials and other surfaces to match adjacent undisturbed surfaces. Install new fireproofing where existing firestopping has been disturbed. Repair and restore and refinish materials and other surfaces by skilled mechanics of trades involved.

3.5 FIELD QUALITY CONTROL

- A. Inspect installed components for damage and faulty work, including the following:
 - 1. Cutting and patching for electrical construction.
 - 2. Touchup painting.

3.6 REFINISHING AND TOUCHUP PAINTING

- A. Clean damaged and disturbed areas and apply primer, intermediate, and finish coats to suit the degree of damage at each location.
- B. Follow paint manufacturer's written instructions for surface preparation and for timing and application of successive coats.
- C. Repair and restore damage to galvanized finishes with zinc rich paint recommended by manufacturer.
- D. Repair and restore damage to PVC or paint finishes with matching touchup coating recommended by manufacturer.

3.7 CLEANING AND PROTECTION

- A. On completion of installation, including outlets, fittings, and devices, inspect exposed finish. Remove burrs, dirt, paint spots, and construction debris.
- B. Protect equipment and installations and maintain conditions to ensure that coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.

END OF SECTION 26 05 10



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260519 - LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Building wires and cables rated 600 V and less.
 - 2. Connectors, splices, and terminations rated 600 V and less.
- B. Related Requirements:
 - 1. Section 260533 "Raceways and Boxes For Electrical Systems."

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For testing agency.
- B. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Testing Agency Qualifications: Member company of NETA or an NRTL.
 - 1. Testing Agency's Field Supervisor: Certified by NETA to supervise on-site testing.
- C. Installation must comply with the current NYC Electrical Code.

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:



1. Alpha Wire.
2. Belden Inc.
3. Encore Wire Corporation.
4. General Cable Technologies Corporation.
5. Southwire Incorporated.
6. Or approved equal.

B. Copper Conductors: Comply with NEMA WC 70/ICEA S-95-658.

C. Conductor Insulation: Comply with NEMA WC 70/ICEA S-95-658 for Type THHN-2-THWN-2, Type XHHW-2, , Type USE, as required by location

D. Multi-conductor Cable: Comply with NEMA WC 70/ICEA S-95-658 for armored cable, Type A, metal-clad cable, Type MC, mineral-insulated, metal-sheathed cable, Type MI, and Type USE with ground wire.

2.2 CONNECTORS AND SPLICES

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. AFC Cable Systems, Inc.
2. Hubbell Power Systems, Inc.
3. Ideal Industries, Inc.
4. IlSCO; a branch of Bardes Corporation.
5. NSi Industries LLC.
6. O-Z/Gedney; a brand of the EGS Electrical Group.
7. 3M; Electrical Markets Division.
8. Tyco Electronics.
9. Or approved equal.

B. Description: Factory-fabricated connectors and splices of size, ampacity rating, material, type, and class for application and service indicated.

2.3 SYSTEM DESCRIPTION

A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Comply with NYC Electrical Code.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

A. Refer to DDC General Conditions for execution requirements.

3.2 CONDUCTOR MATERIAL APPLICATIONS



- A. Branch Circuits: Copper. Solid for No. 10 AWG and smaller; stranded for No. 8 AWG and larger.

3.3 CONDUCTOR INSULATION AND MULTICONDUCTOR CABLE APPLICATIONS AND WIRING METHODS

- A. Exposed Feeders: Type THHN-2 THWN-2, single conductors in raceway for horizontal applications. Type XHHW-2, single conductors in raceway for vertical applications.
- B. Feeders Concealed in Ceilings, Walls, Partitions, and Crawlspace: Type THHN-2-THWN-2, single conductors in raceway. Type XHHW-2 single conductors in raceway for all vertical risers.
- C. Exposed Branch Circuits, Including in Crawlspace: Type THHN-2-THWN-2, single conductors in raceway.
- D. Branch Circuits Concealed in Ceilings, Walls, and Partitions: Type THHN-2-THWN-2, single conductors in raceway. Metal-Clad Type MC for final terminations to lighting fixtures (Max 3ft.) and in walls and partitions.
- E. Branch Circuits Concealed in Concrete: Not allowed.

3.4 INSTALLATION OF CONDUCTORS AND CABLES

- A. Conceal cables in finished walls, ceilings, and floors unless otherwise indicated.
- B. Complete raceway installation between conductor and cable termination points according to Section 260533 "Raceways and Boxes for Electrical Systems" prior to pulling conductors and cables.
- C. Use manufacturer-approved pulling compound or lubricant where necessary; compound used must not deteriorate conductor or insulation. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- D. Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips, that will not damage cables or raceway.
- E. Install exposed cables parallel and perpendicular to surfaces of exposed structural members, and follow surface contours where possible.
- F. Support cables according to Section 260529 "Hangers and Supports for Electrical Systems."
- G. Vertical Supports: Conductors in vertical raceways will be supported at intervals as required by the NYCEC. Additional supports will be provided as indicated on the drawings or as recommended by the cable manufacturer. Supports will be of the two-piece insulating type and will be installed in suitable boxes with covers. Insulated supports will properly secure the conductors and will have the strength to carry the weight of the conductors attached. Obtain documentation from cable manufacturers stating acceptance of support manufacture type and spacing utilized.

3.5 CONNECTIONS

- A. Two Bolt Long Barrell Compression Connections only. No Mechanical connections unless approved by



Commissioner.

- B. Splices will be compression type. No mechanical splices will be acceptable.
- C. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A-486B.
- D. Make splices, terminations, and taps that are compatible with conductor material and that possess equivalent or better mechanical strength and insulation ratings than unspliced conductors.
- E. Wiring at Outlets: Install conductor at each outlet, with at least 6 inches (150 mm) of slack.

3.6 IDENTIFICATION

- A. Identify and color-code conductors and cables according to Section 260553 "Identification for Electrical Systems."
- B. Identify each spare conductor at each end with identity number and location of other end of conductor, and identify as spare conductor.

3.7 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

3.8 FIRESTOPPING

- A. Apply fire-stopping to electrical penetrations of fire-rated floor and wall assemblies to restore original fire-resistance rating of assembly according to Section 078400 "Fire-stopping."

3.9 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Test and Inspection Reports: Prepare a written report to record the following:
 - 1. Procedures used.
 - 2. Results that comply with requirements.
 - 3. Results that do not comply with requirements and corrective action taken to achieve compliance with requirements.
- C. Cables will be considered defective if they do not pass tests and inspections.

3.10 INSTALLATION OF LIGHTING AND APPLIANCE BRANCH CIRCUITRY

- A. Circuitry indicated without sizing will be understood to be lighting and appliance branch circuitry protected at 20 amps or less.
- B. Conform all lighting and appliance branch circuitry (regardless of whether protected above or below 20



amps) to the following:

1. Except as noted below, circuitry will be multi-wire deducted neutrals arranged so that no neutral conductor acts as a common wire for more than one circuit conductor connected to the same phase leg of the supply system.
 2. Common neutrals will not be utilized for circuitry runs.
 3. Branch circuitry supplying relay controlled lighting fixtures will be understood to include all necessary interconnections between the control panels containing the relays and the associated lighting or appliance panels.
 4. Under no condition will any local switch break a neutral conductor.
 5. At any location where lighting and appliance branch circuitry is extended from a flush mounted panelboard to a suspended ceiling immediately above, at least four 1-inch empty conduits will be included (in addition to those required for active circuitry) to permit future wiring escape from the panelboard. The empty conduits will extend up from the panel and will terminate in a threaded conduit cap immediately after turning out into an accessible hung ceiling space.
 6. Raceway sizes will conform to standard maximum permissible occupancy requirements except where these are exceeded by other requirements specified elsewhere.
 7. Two and three pole branches in panels will be used respectively for individual single phase load items connected line to line and individual three phase load items. Where circuitry indications require the use of 2-pole and/or 3-pole branch breakers which have not been scheduled, provide in the panel boards the required multi-pole breakers in lieu of the equivalent number of single pole branch breakers. Required quantities of single, two and three pole branch breakers will be confirmed prior to ordering panels.
- C. Conform lighting and appliance branch circuitry, indicated as being protected at 20 amps or less, to the following:
1. 120-volt circuitry will be supplied from 20-amp panel branches except as indicated.
 2. Common neutrals will not be utilized for multiwire circuit runs.
 3. Conductors for 120-volt circuitry extending in excess of 75 feet, from the point of supply, to the first outlet will be #10 AWG (minimum) copper to the first outlet. Increase beyond #10 AWG if required for compliance with code-mandated voltage drop restrictions.
 4. Conductors used in runs consisting of more than six wires, i.e. current carrying conductors, (exclusive of grounding conductors) in a single raceway will be #10 AWG copper minimum. Increase beyond #10 AWG as required to comply with code-mandated derating factors, and as specified hereinbefore.
 5. Circuits supplying receptacles which are not of the ground fault circuit interrupting type, and are located as noted below, will be connected to panel branches that are equipped with ground fault interrupting features:
 - a. Receptacles located within 6 feet of any sink and intended to serve counter top surfaces.
 - b. All receptacles mounted on building exterior surfaces including those on balconies.
 - c. All receptacles mounted in elevator machine rooms, machinery spaces and pits.
 6. Circuits supplying and pipe tracing cable and HWAT cable will be connected to panel branches equipped with 30 ma interrupting features for equipment protection. GFCI.
- D. Where circuitry has not been delineated for lighting fixtures, receptacles, switches and miscellaneous items intended for protection at 20 amps, such items will be provided with circuitry conforming to the requirements



listed below. Prior to installation of circuitry, submit for review floor plans showing circuit numbers, home runs, and interconnecting circuitry for all such items.

1. When circuiting up recessed ceiling lighting fixtures, connect fixtures on the basis of more than one fixture to a single outlet box, in an approved manner, as required to ensure that circuits will not be unnecessarily lightly loaded due to mandated, restrictions on the maximum number of outlets per circuit. Except with special permission, unnecessarily light loading will be understood to mean, less than 1000 volt amps (VA) on a 120 volt circuit.
2. The total load on a circuit will be computed by ascribing volt-amps to individual items on the basis of the following:

ITEM	VOLT-AMPS (VA)
Any lighting fixture.	Input volt-amps as per lighting fixture schedule.
Any outlet with no specific wattage or circuiting instruction indicated.	180 volts
Any outlet (other than for resistance heating) with wattage indicated.	1.15 x Indicated wattage
Any resistance heating outlet with wattage indicated.	1.0 x Indicated wattage
Any fractional HP motor with HP indicated.	2500 x Indicated HP
Any outlet with amps indicated.	120 x Indicated amps

3. No more than (8) outlets or 1650 VA will be applied to a single 20 amp, 120 volt panel branch circuit.
4. Where circuitry involves connection of more than (10) lighting fixtures to a single 120 volt circuit or (20) lighting fixtures to a 265 volt circuit, it will be understood that multiple lighting fixtures will be connected to individual outlet boxes in an approved manner, and that the restriction on the number of outlets per circuit specified above pertains to the number of outlet boxes not lighting fixtures. Circuitry arrangements utilizing an excess number of panel branch circuits because of failure to multiply connect lighting fixtures to outlet boxes will require approximate correction to eliminate such excess circuit use.
5. A separate 20 amp circuit supplying more than two 120 volt outlets will be utilized for outlets indicated as "Appliance Circuit" outlets.
6. A separate 20 amp panel branch circuit supplying no other outlets will be used for each outlet indicated as an "individual appliance circuit" "heavy duty" outlet.
7. Not more than 1300 total VA will be applied to any 15 amp, 120 volt panel branch circuit nor more than 1450 VA to any 20 amp, 120 volt branch circuit.



8. A separate 20 amp panel branch circuit supplying no other outlets will be used for each outlet indicated as an "individual appliance circuit" "heavy duty" outlet.
9. Lighting fixture will be connected to 20 amp panel branch circuits. Solidly connected equipment less than 1300 VA will be connected to 15 amp panel branch circuits except as indicated or noted herein.
10. Any installed lighting and appliance branch circuitry, found (as a result of unnecessarily light loading of conductors) to make excessive use of panel branches, will be rearranged.
11. Circuits will be balanced on phases at their supply point as evenly as possible.
12. The final arrangement of lighting and appliance branch circuitry will be fully delineated on the record, or "as-built" drawings.

END OF SECTION 26 05 19



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260526 - GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section includes grounding of electrical systems and equipment. Grounding requirements specified in this Section may be supplemented in other sections of these Specifications.
- B. Related Sections:
 - 1. Division 26, Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
 - 2. Division 26, Section 260533 "Raceways and Boxes for Electrical Systems."

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. As-Built Data: Plans showing dimensioned as-built locations of grounding features specified in "Field Quality Control" Article, including the following:
 - 1. Test wells.
 - 2. Ground rods.
 - 3. Ground rings.
 - 4. Grounding arrangements and connections for separately derived systems.
- C. Qualification Data: For testing agency and testing agency's field supervisor.
- D. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For grounding to include in emergency, operation, and maintenance manuals.



1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
 - a. Instructions for periodic testing and inspection of grounding features at test wells, ground rings, grounding connections for separately derived systems based on NETA MTS, NFPA 70B, NYC Electrical Code.
 - 1) Tests will determine if ground-resistance or impedance values remain within specified maximums, and instructions will recommend corrective action if values do not.
 - 2) Include recommended testing intervals.

1.6 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by Underwriters Laboratories, Inc.
- C. Comply with NFPA 780 and UL 96 when interconnecting with lightning protection system.
- D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- E. Comply with UL 467 for grounding and bonding materials and equipment.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Burndy; Part of Hubbell Electrical Systems.
 2. ERICO International Corporation.
 3. O-Z/Gedney; A Brand of the EGS Electrical Group.
 4. Thomas & Betts, Electrical.
 5. Raco, Inc.
 6. Ideal Industries.
 7. Or approved equal.

2.2 CONDUCTORS

- A. Insulated Conductors: Copper wire or cable insulated for 600 V unless otherwise required by NYC Electrical Code. Insulated conductors will comply with Division 26 Section 260519 Low-Voltage Electrical Power Conductors and Cables.
- B. Material: Copper.



- C. Equipment Grounding Conductors: Insulated with green-colored insulation, in all equipment branch and feeder circuits.
- D. Isolated Ground Conductors: Insulated with green-colored insulation with yellow stripe. On feeders with isolated ground, use colored tape, alternating bands of green and yellow tape to provide a minimum of three bands of green and two bands of yellow.
- E. Grounding Electrode Conductors: Stranded cable
- F. Bare Copper Conductors:
 - 1. Solid Conductors: ASTM B 3.
 - 2. Stranded Conductors: ASTM B 8.
 - 3. Tinned Conductors: ASTM B 33.
 - 4. Bonding Cable: 28 kcmil, 14 strands of No. 17 AWG conductor, 1/4 inch (6 mm) in diameter.
 - 5. Bonding Conductor: No. 4 or No. 6 AWG, stranded conductor (or per Code).
 - 6. Bonding Jumper: Copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.
 - 7. Tinned Bonding Jumper: Tinned-copper tape, braided conductors terminated with copper ferrules; 1-5/8 inches (41 mm) wide and 1/16 inch (1.6 mm) thick.
- G. Grounding Bus: Bare, annealed copper bars of rectangular cross section, with insulators. Sized as required.

2.3 CONNECTORS

- A. Comply with IEEE 837 and UL 467; listed for use for specific types, sizes, and combinations of conductors and connected items.
- B. Bolted Connectors: Compression type.
- C. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.
- D. Bus-Bar Connectors: Compression type, cast silicon bronze, solderless exothermic-type wire terminals, and long-barrel, two-bolt connection to ground bus bar.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 APPLICATIONS

- A. Equipment Grounding Conductor Application: Comply with current New York City Electrical Code for sizes and quantities of equipment grounding conductors, except where specific types, larger sizes or more conductors are indicated.

- B. Signal and Communications: For telephone, alarm, voice and data and other communication systems, provide a #4 AWG minimum green insulated copper conductor in raceway from the grounding electrode system to each service location, terminal cabinet, wiring closet and central equipment location.
- C. Bond metallic conduits containing grounding electrode conductors and main bonding conductors to the ground bus service enclosure and/or grounding electrode at both ends of each run utilizing grounding bushings and jumpers. Bonding jumpers will be sized equal to the grounding electrode conductors.
- D. Provide grounding bonds for all metallic conduits of the light and power system which terminate at (or in pits below) distribution equipment for which a ground bus is specified. Accomplish this by equipping the conduits with bushings of the grounding type connected individually to the ground bus.
- E. Provide supplementary ground bonding to maintain continuity of the equipment and raceway grounding system as follows:
 - 1. Bonding jumpers applied where wiring devices (receptacles and switches) are not equipped with approved self-grounding features. Include any necessary field modifications for termination of the bonding jumpers so as to ensure grounding continuity.
 - 2. Bonding jumpers applied to ensure that grounding continuity does not depend solely on the supporting screws fastening metallic enclosures together.
 - 3. Include any necessary field modifications for termination of the bonding jumpers so as to ensure grounding continuity.

3.3 CONNECTIONS

- A. General: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact will be galvanically compatible.
 - 1. Use electroplated or hot-tin-coated materials to assure high conductivity and to make contact points closer in order of galvanic series.
 - 2. Make connections with clean, bare metal at points of contact.
 - 3. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.
- B. Equipment Grounding-Wire Terminations: For No. 8 AWG and larger, use pressure-type grounding lugs. No. 10 AWG and smaller grounding conductors may be terminated with winged pressure-type connectors.
- C. Noncontact Metal Raceway Terminations: Where metallic raceways terminate at metal housings without mechanical and electrical connection to housing, terminate each conduit with a grounding bushing. Connect grounding bushings with a bare grounding conductor to grounding bus or terminal in housing. Bond electrically noncontinuous conduits at both entrances and exits with grounding bushings and bare grounding conductors, except as otherwise indicated.
- D. Tighten screws and bolts for grounding and bonding connectors and terminals according to manufacturer's published torque-tightening values. Where these requirements are not available, use those specified in UL 486A and UL 486B.



- E. Compression-Type Connections: Use hydraulic compression tools to provide correct circumferential pressure for compression connectors. Use tools and dies recommended by manufacturer of connectors. Provide embossing die code or other standard method to make a visible indication that a connector has been adequately compressed on grounding conductor.
- F. Moisture Protection: Where insulated grounding conductors are connected to grounding rods or grounding buses, insulate entire area of connection and seal against moisture penetration of insulation and cable.

3.4 CONDUCTORS

- A. Conductors: Install solid conductor for No. 8 AWG and smaller, and stranded conductors for No. 6 AWG and larger unless otherwise indicated.
- B. Conductor Terminations and Connections:
 - 1. Pipe and Equipment Grounding Conductor Terminations: Bolted connectors.
 - 2. Underground Connections: Welded connectors except at test wells and as otherwise indicated.
 - 3. Connections to Ground Rods at Test Wells: Bolted connectors.
 - 4. Connections to Bus Bars: Welded connectors.

3.5 EQUIPMENT GROUNDING

- A. Install insulated equipment grounding conductors with all feeders and branch circuits.
- B. Install insulated equipment grounding conductors with the following items, in addition to those required by NFPA 70:
 - 1. Lighting circuits.
 - 2. Receptacle circuits.
 - 3. Single-phase motor and appliance branch circuits.
 - 4. Three-phase motor and appliance branch circuits.
 - 5. Flexible raceway runs.
 - 6. Armored and metal-clad cable runs.
 - 7. Non Metallic Raceways: Install an insulated equipment ground conductor in nonmetallic raceways unless they are designated for telephone or data cables.
 - 8. Control circuits.

3.6 INSTALLATION

- A. General: Ground electrical systems and equipment according to NYC Electrical Code requirements, except where Drawings or Specifications exceed such requirements.
- B. Grounding Conductors: Route along shortest and straightest paths possible unless otherwise indicated or required by Code. Avoid obstructing access or placing conductors where they may be subjected to strain, impact, or damage.
 - 1. Bonding to Equipment Mounted on Vibration Isolation Hangers and Supports: Install bonding so vibration is not transmitted to rigidly mounted equipment.



2. Use exothermic-welded connectors for outdoor locations; if a disconnect-type connection is required, use a bolted clamp.

C. Grounding and Bonding for Piping:

1. **Metal Water Service Pipe:** Install insulated copper grounding conductors, in conduit, from building's main service equipment, or grounding bus, to main metal water service entrances to building. Connect grounding conductors to main metal water service pipes; use a bolted clamp connector or bolt a lug-type connector to a pipe flange by using one of the lug bolts of the flange. Where a dielectric main water fitting is installed, connect grounding conductor on street side of fitting. Bond metal grounding conductor conduit or sleeve to conductor at each end.
2. **Water Meter Piping:** Use braided-type bonding jumpers to electrically bypass water meters. Connect to pipe with a bolted connector.
3. Bond each aboveground portion of gas piping system downstream from equipment shutoff valve.

3.7 FIELD QUALITY CONTROL

- A. **Testing Agency:** Engage a qualified testing agency to perform tests and inspections.
- B. **Manufacturer's Field Service:** Engage a factory-authorized service representative to inspect, test, and adjust components, assemblies, and equipment installations, including connections.
- C. Prepare test and inspection reports.
- D. Report measured ground resistances that exceed the following values:
 1. Power and Lighting Equipment or System with Capacity of 500 kVA and Less: 10 ohms.
- E. **Excessive Ground Resistance:** If resistance to ground exceeds specified values, notify Commissioner promptly and include recommendations to reduce ground resistance.

END OF SECTION 26 05 26



SECTION 260529 - HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section includes secure support from the building structure for electrical items by means of hangers, supports, anchors, sleeves, inserts, seals, and associated fastenings.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 SUBMITTALS

- A. Product Data: For the following:
 - 1. Steel slotted support systems.
 - 2. Nonmetallic slotted support systems.
- B. Shop Drawings: Signed and sealed by a qualified professional engineer licensed in the State of New York. Show fabrication and installation details and include calculations for the following:
 - 1. Trapeze hangers. Include Product Data for components.
 - 2. Steel slotted channel systems. Include Product Data for components.
 - 3. Nonmetallic slotted channel systems. Include Product Data for components.
 - 4. Equipment supports.
- C. Welding certificates.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Electrical Component Standard: Components and installation will comply with NYC Electrical Code.
- C. Electrical components will be listed and labeled by UL, ETL, CSA, or other approved, nationally recognized testing and listing agency that provides third party certification follow up services.



PART 2 - PRODUCTS

2.1 SUPPORT, ANCHORAGE, AND ATTACHMENT COMPONENTS

- A. Steel Slotted Support Systems: Comply with MFMA-4, factory-fabricated components for field assembly.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Allied Tube & Conduit.
 - b. Cooper B-Line, Inc.; a division of Cooper Industries.
 - c. ERICO International Corporation.
 - d. Thomas & Betts Corporation.
 - e. Unistrut; Tyco International, Ltd.
 - f. Or approved equal.
 - 2. Metallic Coatings: Hot-dip galvanized after fabrication and applied according to MFMA-4.
 - 3. Nonmetallic Coatings: Manufacturer's standard PVC, polyurethane, or polyester coating applied according to MFMA-4.
 - 4. Painted Coatings: Manufacturer's standard painted coating applied according to MFMA-
 - 5. Channel Dimensions: Selected for applicable load criteria
- B. Raceway and Cable Supports: Clevis hangers, riser clamps, conduit straps, threaded C clamps with retainers, ceiling trapeze hangers, wall brackets, and spring steel clamps.
 - 1. Fasteners: Types, materials, and construction features as follows:
 - 2. Expansion Anchors: Carbon steel wedge or sleeve type.
 - 3. Toggle Bolts: All steel springhead type.
- C. Powder Driven Threaded Studs: Heat treated steel, designed specifically for the intended service.
 - 1. Conduit Sealing Bushings: Factory fabricated watertight conduit sealing bushing assemblies suitable for sealing around conduit, or tubing passing through concrete floors and walls. Construct seals with steel sleeve, malleable iron body, neoprene sealing grommets or rings, metal pressure rings, pressure clamps, and cap screws.
 - 2. U Channel Systems: 16 gage steel channels, with 9/16 inch diameter holes, at a minimum of 8 inches on center, in top surface. Provide fittings and accessories that mate and match with U channel and are of the same manufacture.
- D. Conduit and Cable Support Devices: Steel and malleable-iron hangers, clamps, and associated fittings, designed for types and sizes of raceway or cable to be supported.
- E. Support for Conductors in Vertical Conduit: Factory-fabricated assembly consisting of threaded body and insulating wedging plug or plugs for cables in riser conduits. Plugs will have number, size, and shape of conductor gripping pieces as required to suit individual conductors or cables supported. Body will be malleable iron. Must comply with all manufacturer's requirements and recommendations.
- F. Mounting, Anchoring, and Attachment Components: Items for fastening electrical items or their supports to building surfaces include the following:
 - 1. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete, steel,



or wood, with tension, shear, and pullout capacities appropriate for supported loads and building materials where used.

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1) Hilti Inc.
- 2) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
- 3) MKT Fastening, LLC.
- 4) Simpson Strong-Tie Co., Inc.; Masterset Fastening Systems Unit.
- 5) Or approved equal.

2. Mechanical-Expansion Anchors: Insert-wedge-type, stainless steel, for use in hardened Portland cement concrete with tension, shear, and pullout capacities appropriate for supported loads and building materials in which used.

a. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1) Cooper B-Line, Inc.; a division of Cooper Industries.
- 2) Empire Tool and Manufacturing Co., Inc.
- 3) Hilti Inc.
- 4) ITW Ramset/Red Head; a division of Illinois Tool Works, Inc.
- 5) MKT Fastening, LLC.
- 6) Or approved equal.

3. Concrete Inserts: Steel or malleable-iron, slotted support system units similar to MSS Type 18; complying with MFMA-4 or MSS SP-58.

4. Through Bolts: Structural type, hex head, and high strength. Comply with ASTM A 325.

5. Toggle Bolts: All-steel springhead type.

6. Hanger Rods: Threaded steel.

2.2 FABRICATED METAL EQUIPMENT SUPPORT ASSEMBLIES

A. Description: Welded or bolted, structural-steel shapes, shop or field fabricated to fit dimensions of supported equipment.

B. Materials: Comply with requirements in Section 055000 "Metal Fabrications" for steel shapes and plates.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

A. Refer to DDC General Conditions for execution requirements.

3.2 APPLICATION

A. Comply with NECA 1 and NECA 101 for application of hangers and supports for electrical equipment and systems except if requirements in this Section are stricter.



- B. Maximum Support Spacing and Minimum Hanger Rod Size for Raceway: Space supports for EMT, IMC, and RMC as required by NFPA 70 and New York City Electrical Code. Minimum rod size will be 1/4 inch (6 mm) in diameter.
- C. Multiple Raceways or Cables: Install trapeze-type supports fabricated with steel slotted support system, sized so capacity can be increased by at least 25 percent in future without exceeding specified design load limits.
 - 1. Secure raceways and cables to these supports with two-bolt conduit clamps. Retain paragraph below for projects where seismic design requirements do not apply. Consider retaining for light-commercial projects only.
- D. Spring-steel clamps designed for supporting single conduits without bolts may be used for 1-1/2-inch (38-mm) and smaller raceways serving branch circuits and communication systems above suspended ceilings and for fastening raceways to trapeze supports.

3.3 SUPPORT INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except as specified in this Article.
- B. Install supporting devices to fasten electrical components securely and permanently in accordance with NEC requirements.
- C. Coordinate with the building structural system and with other electrical installations.
- D. Raceway Supports: Comply with the New York City Electrical Code and the following requirements:
 - 1. Conform to manufacturer's recommendations for selection and installation of supports.
 - 2. Strength of each support will be adequate to carry present and future load multiplied by a safety factor of at least four. Where this determination results in a safety allowance of less than 200 lbs, provide additional strength until there is a minimum of 200 lbs safety allowance in the strength of each support.
 - 3. Install individual and multiple (trapeze) raceway hangers and riser clamps as necessary to support raceways. Provide U bolts, clamps, attachments, and other hardware necessary for hanger assembly and for securing hanger rods and conduits.
 - 4. Support parallel runs of horizontal raceways together on trapeze type hangers.
 - 5. Support individual horizontal raceways by separate pipe hangers. Spring steel fasteners may be used in lieu of hangers only for 1 1/2 inch and smaller raceways serving lighting and receptacle branch circuits above suspended ceilings only. For hanger rods with spring steel fasteners, use 1/4 inch diameter or larger threaded steel. Use spring steel fasteners that are specifically designed for supporting single conduits or tubing.
 - 6. Space supports for raceways in accordance with Table I of this section. Space supports for raceway types not covered by the above in accordance with New York City Electrical Code.
 - 7. Support exposed and concealed raceway within 1 foot of an unsupported box and access fittings. In horizontal runs, support at the box and access fittings may be omitted where box or access fittings are independently supported and raceway terminals are not made with chase nipples or threadless box connectors.
 - 8. In vertical runs, arrange support so the load produced by the weight of the raceway and the enclosed conductors is carried entirely by the conduit supports with no weight load on conductor terminals.



- E. Miscellaneous Supports: Support miscellaneous electrical components as required to produce the same structural safety factors as specified for raceway supports. Install metal channel racks for mounting cabinets, panelboards, disconnects, control enclosures, pull boxes, junction boxes, transformers, and other devices.
- F. In open overhead spaces, cast boxes threaded to raceways need not be supported separately except where used for fixture support; support sheet metal boxes directly from the building structure or by bar hangers. Where bar hangers are used, attach the bar to raceways on opposite sides of the box and support the raceway with an approved type of fastener not more than 24 inches from the box.
- G. Sleeves: Install in concrete slabs and walls and all other fire rated floors and walls for raceways and cable installations. For sleeves through fire rated wall or floor construction, apply UL listed firestopping sealant in gaps between sleeves and enclosed conduits and cables in accordance with "Fire Resistant Joint Sealers" requirement of Division 26 Section 260510 "Basic Electrical Materials and Methods."
- H. Fastening: Unless otherwise indicated, fasten electrical items and their supporting hardware securely to the building structure, including but not limited to conduits, raceways, cables, cable trays, busways, cabinets, panelboards, transformers, boxes, disconnect switches, and control components in accordance with the following:
 - 1. Fasten by means of wood screws or screw type nails on wood, toggle bolts on hollow masonry units, concrete inserts or expansion bolts on concrete or solid masonry, and machine screws, welded threaded studs, or spring tension clamps on steel. Threaded studs driven by a powder charge and provided with lock washers and nuts may be used instead of expansion bolts and machine or wood screws. Do not weld conduit, pipe straps, or items other than threaded studs to steel structures. In partitions of light steel construction, use sheet metal screws.
 - 2. Holes cut to depth of more than 1 1/2 inches in reinforced concrete beams or to depth of more than 3/4 inch in concrete will not cut the main reinforcing bars. Fill holes that are not used.
 - 3. Ensure that the load applied to any fastener does not exceed 25 percent of the proof test load. Use vibration and shock resistant fasteners for attachments to concrete slabs.
- I. In general, walls and partitions will not be suitable for supporting the weight of panelboards, dry type transformers and the like. Include supporting frames or racks extending from floor slab to ceiling slab for all such items unless specifically instructed otherwise by the Commissioner.
- J. Include supporting frames or racks for equipment, intended for vertical surface mounting, which is required in a free standing position.
- K. Supporting frames or racks will be of standard angle, standard channel or specialty support system steel members. They will be rigidly bolted or welded together and adequately braced to form a substantial structure. Racks will be of ample size to assure a workmanlike arrangement of all equipment mounted on them.
- L. No work intended for exposed installation in damp locations will be mounted directly on any building surface. In such locations, flat bar members or spacers will be used to create a minimum of 1/4" air space between the building surfaces and the work.
- M. Support vertical runs of bus duct at intervals no greater than the floor to floor height, or thirteen feet,



whichever is smaller. Support horizontal runs of bus duct at intervals no greater than five feet.

- N. Nothing (including outlet, pull and junction boxes and fittings) will depend on electric conduits, raceways or cables for support except that threaded hub type fittings having a gross volume not in excess of 100 cubic inches may be supported from heavy wall conduit, where the conduit in turn is securely supported from the structure within five inches of the fitting on two opposite sides.
- O. Nothing will rest on, or depend for support on, suspended ceiling media (tiles, lath, plaster, as well as splines, runners, bars and the like in the plane of the ceiling). Vertical members which suspend the ceiling (together with their horizontal bracing which occurs above the ceiling), however, may be used for support, subject to the following criteria:
 - 1. Supporting procedures will be in accordance with the ceiling system manufacturer's instructions.
 - 2. Supporting members for circuitry will be rigid. Wires may not be used for such support.
- P. In conjunction with lighting fixtures or other items weighing less than forty pounds, the above restriction against supporting from suspended ceiling splines, runners or bars in the plane of the ceiling will be waived for ceilings which have been specifically approved for the weight and arrangement of fixtures being applied. Any support members, mechanical fastening means (i.e., bolts, screws or rivets), or other appurtenances, however, required to tie in or adapt to the fixtures and their ceiling opening frames (if any) to the ceiling in the approved manner will be included as part of the electric work.
- Q. As a minimum procedure, support surface or pendant mounted lighting fixture:
 - 1. From its outlet box by means of an interposed metal strap, where weight is less than five pounds.
 - 2. From its outlet box by means of a hickey or other direct threaded connection, where weight is from five to fifty pounds.
 - 3. Directly from structural slab, deck or framing member, where weight exceeds fifty pounds.
- R. As a minimum procedure, support recessed lighting fixtures as follows:
 - 1. From ceiling suspension members, as described above, where weight is eighty pounds or less. Fluorescent fixtures will be provided with clips to secure the fixtures to the ceiling members at two opposite ends of each fixture.
 - 2. Directly from structural slabs, decks or framing members where weight is more than eighty pounds.
- S. Include in the electric work channel sills or skids for leveling and support of all floor mounted electrical equipment.
- T. Where permitted loading is exceeded by direct application of electrical equipment to a slab or deck, include in the electric work proper dunnage as required to distribute the weight in a safe manner.
- U. Retain first paragraph below to permit raceways running perpendicular to bar joists and trusses to be supported by letting them rest within the joist or truss openings. NECA 1 does not mention this method. If seismic design requirements apply, consult structural engineer or authorities having jurisdiction before permitting this support method and specify seismic requirements in Section 260548 "Vibration and Seismic Controls for Electrical Systems."



- V. Raceway Support Methods: In addition to methods described in NECA 1, EMT, IMC, and RMC may be supported by openings through structure members, as permitted in NFPA 70.
- W. Strength of Support Assemblies: Where not indicated, select sizes of components so strength will be adequate to carry present and future static loads within specified loading limits. Minimum static design load used for strength determination will be weight of supported components plus 200 lb (90 kg).
- X. Mounting and Anchorage of Surface-Mounted Equipment and Components: Anchor and fasten electrical items and their supports to building structural elements by the following methods unless otherwise indicated by code:
 - 1. To Existing Concrete: Expansion anchor fasteners.
 - 2. To Steel: Welded threaded studs complying with AWS D1.1/D1.1M, with lock washers and nuts
 - 3. To Light Steel: Sheet metal screws.
 - 4. Items Mounted on Hollow Walls and Nonstructural Building Surfaces: Mount cabinets, panelboards, disconnect switches, control enclosures, pull and junction boxes, transformers, and other devices on slotted-channel racks attached to substrate by means that meet seismic-restraint strength and anchorage requirements.
- Y. Drill holes for expansion anchors in concrete at locations and to depths that avoid reinforcing bars.

3.4 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
 - 1. Apply paint with a brush or spray to provide minimum dry film thickness of 2.0 mils (0.05 mm).
- B. Touchup: Comply with requirements in Section 09900 "Painting and Coating", for cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint on miscellaneous metal.
- C. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair and restore paint to comply with ASTM A 780.

3.5 TABLE I: SPACING FOR RACEWAY SUPPORTS

A. Horizontal Runs

Raceway Size	Maximum Spacing
Less than 1"	7'-0"
1" and larger	10'-0"

END OF SECTION 26 05 29



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260533 - RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Metal conduits, tubing, and fittings.
 - 2. Metal wire ways and auxiliary gutters.
 - 3. Boxes, enclosures, and cabinets.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 DEFINITIONS

- A. EMT: Electrical Metallic Tubing

1.5 ACTION SUBMITTALS

- A. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.
- B. Shop Drawings: For custom enclosures and cabinets. Include plans, elevations, sections, and attachment details.

1.6 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 METAL CONDUITS, TUBING, AND FITTINGS

- A. Manufacturers: Subject to compliance with requirements provide products by one of the following:



1. AFC Cable Systems, Inc.
 2. Allied Tube & Conduit; a Tyco International Ltd. Co.
 3. O-Z/Gedney; a brand of EGS Electrical Group.
 4. Thomas & Betts Corporation.
 5. Western Tube and Conduit Corporation.
 6. Wheatland Tube Company; a division of John Maneely Company.
 7. Or approved equal.
- B. Listing and Labeling: Metal conduits, tubing, and fittings will be listed and labeled as defined in NFPA 70 by a qualified testing agency and marked for intended location and application.
- C. EMT: Comply with ANSI C80.3 and UL 797.
- D. FMC: Comply with UL 1; zinc-coated steel.
- E. LFMC: Flexible steel conduit with PVC jacket and complying with UL 360.
- F. Fittings for Metal Conduit: Comply with NEMA FB 1 and UL 514B.
1. Conduit Fittings for Hazardous (Classified) Locations: Comply with UL 886 and NFPA 70.
 2. Fittings for EMT:
 - a. Material: Steel.
 - b. Type: Setscrew or compression.

2.2 BOXES, ENCLOSURES, AND CABINETS

- A. Manufacturers: Subject to compliance with requirements, Provide products by one of the following:
1. Cooper Technologies Company; Cooper Crouse-Hinds.
 2. EGS/Appleton Electric.
 3. Hoffman; a Pentair company.
 4. Hubbell Incorporated; Killark Division.
 5. O-Z/Gedney; a brand of EGS Electrical Group.
 6. RACO; a Hubbell Company.
 7. Thomas & Betts Corporation.
 8. Wiremold / Legrand.
 9. Or approved equal.
- B. General Requirements for Boxes, Enclosures, and Cabinets: Boxes, enclosures, and cabinets installed in wet locations will be listed for use in wet locations.
- C. Sheet Metal Outlet and Device Boxes: Comply with NEMA OS 1 and UL 514A.
- D. Luminaire Outlet Boxes: Nonadjustable, designed for attachment of luminaire weighing 50 lb (23 kg). Outlet boxes designed for attachment of luminaires weighing more than 50 lb (23 kg) will be listed and marked for the maximum allowable weight.
- E. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.



- F. Box extensions used to accommodate new building finishes will be of same material as recessed box.
- G. Device Box Dimensions: 4 inches square by 2-1/8 inches deep (100 mm square by 60 mm deep)
- H. Gangable boxes are allowed.
- I. Hinged-Cover Enclosures: Comply with UL 50 and NEMA 250, Type 1, Type 3R, Type 4, or Type 12 depending on location with continuous-hinge cover with flush latch unless otherwise indicated.
 - 1. Metal Enclosures: Steel, finished inside and out with manufacturer's standard enamel.
 - 2. Interior Panels: Steel; all sides finished with manufacturer's standard enamel.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 RACEWAY APPLICATION

- A. Outdoors: Not Applicable for Project
- B. Indoors: Apply raceway products as specified below unless otherwise indicated:
 - 1. Exposed, Not Subject to Physical Damage: EMT
 - 2. Exposed, Not Subject to Severe Physical Damage: EMT.
 - 3. Exposed and Subject to Severe Physical Damage: RGC. Raceway locations include the following:
 - a. Loading dock.
 - b. Corridors used for traffic of mechanized carts, forklifts, and pallet-handling units.
 - c. Mechanical rooms.
 - 4. Concealed in Ceilings and Interior Walls and Partitions: EMT
 - 5. Connection to Vibrating Equipment (Including Transformers and Hydraulic, Pneumatic, Electric Solenoid, or Motor-Driven Equipment): FMC, except use LFMC in damp or wet locations.
 - 6. Damp or Wet Locations (Showers): Rigid Aluminum Conduit
- C. Minimum Raceway Size: 3/4-inch (21-mm) trade size.
- D. Raceway Fittings: Compatible with raceways and suitable for use and location.
 - 1. EMT: Use setscrew or compression fittings. Comply with NEMA FB 2.10.
 - 2. Flexible Conduit: Use only fittings listed for use with flexible conduit. Comply with NEMA FB 2.20.
- E. Do not install nonmetallic conduit where ambient temperature exceeds 120 deg F (49 deg C)



3.3 INSTALLATION

- A. Comply with NECA 1 and NECA 101 for installation requirements except where requirements on Drawings or in this article are stricter. Comply with NECA 102 for aluminum conduits. Comply with NFPA 70 limitations for types of raceways allowed in specific occupancies and number of floors.
- B. Keep raceways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot-water pipes. Install horizontal raceway runs above water and steam piping.
- C. Complete raceway installation before starting conductor installation.
- D. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for hangers and supports.
- E. Arrange stub-ups so curved portions of bends are not visible above finished slab.
- F. Install no more than the equivalent of three 90-degree bends in any conduit run except for control wiring conduits, for which fewer bends are allowed. Support within 12 inches (300 mm) of changes in direction.
- G. Conceal conduit and EMT within finished walls, ceilings, and floors unless otherwise indicated. Install conduits parallel or perpendicular to building lines.
- H. Support conduit within 12 inches (300 mm) of enclosures to which attached.
- I. Stub-ups to Above Recessed Ceilings:
 - 1. Use EMT, IMC, or RMC for raceways.
 - 2. Use a conduit bushing or insulated fitting to terminate stub-ups not terminated in hubs or in an enclosure.
- J. Threaded Conduit Joints, Exposed to Wet, Damp, Corrosive, or Outdoor Conditions: Apply listed compound to threads of raceway and fittings before making up joints. Follow compound manufacturer's written instructions.
- K. Raceway Terminations at Locations Subject to Moisture or Vibration: Use insulating bushings to protect conductors including conductors smaller than No. 4 AWG.
- L. Terminate threaded conduits into threaded hubs or with locknuts on inside and outside of boxes or cabinets. Install bushings on conduits up to 1-1/4-inch (35mm) trade size and insulated throat metal bushings on 1-1/2-inch (41-mm) trade size and larger conduits terminated with locknuts. Install insulated throat metal grounding bushings on service conduits.
- M. Install raceways square to the enclosure and terminate at enclosures with locknuts. Install locknuts hand tight plus 1/4 turn more.
- N. Do not rely on locknuts to penetrate nonconductive coatings on enclosures. Remove coatings in the locknut area prior to assembling conduit to enclosure to assure a continuous ground path.



- O. Cut conduit perpendicular to the length. For conduits 2-inch (53-mm) trade size and larger, use roll cutter or a guide to make cut straight and perpendicular to the length.
- P. Flexible Conduit Connections: Comply with NEMA RV 3. Use a maximum of 72 inches (1830 mm) of flexible conduit for recessed and semi recessed luminaires, equipment subject to vibration, noise transmission, or movement; and for transformers and motors.
 - 1. Use LFMC in damp or wet locations subject to severe physical damage.
 - 2. Use LFMC or LFNC in damp or wet locations not subject to severe physical damage.
- Q. Mount boxes at heights indicated on Drawings. If mounting heights of boxes are not individually indicated, give priority to ADA requirements. Install boxes with height measured to bottom of box unless otherwise indicated.
- R. Recessed Boxes in Masonry Walls: Saw-cut opening for box in center of cell of masonry block, and install box flush with surface of wall. Prepare block surfaces to provide a flat surface for a raintight connection between box and cover plate or supported equipment and box.
- S. Horizontally separate boxes mounted on opposite sides of walls so they are not in the same vertical channel.
- T. Locate boxes so that cover or plate will not span different building finishes.
- U. Support boxes of three gangs or more from more than one side by spanning two framing members or mounting on brackets specifically designed for the purpose.
- V. Fasten junction and pull boxes to or support from building structure. Do not support boxes by conduits.
- W. Set metal floor boxes level and flush with finished floor surface.

3.4 SLEEVE AND SLEEVE-SEAL INSTALLATION FOR ELECTRICAL PENETRATIONS

- A. Install sleeves and sleeve seals at penetrations of exterior floor and wall assemblies. Comply with requirements in Section 260544 "Sleeves and Sleeve Seals for Electrical Raceways and Cabling."

3.5 FIRESTOPPING

- A. Install firestopping at penetrations of fire-rated floor and wall assemblies. Comply with requirements in Section 078400 "Firestopping."

3.6 PROTECTION

- A. Protect coatings, finishes, and cabinets from damage and deterioration.
 - 1. Repair and restore damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair and restore damage to PVC coatings or paint finishes with matching touchup coating recommended by manufacturer.

END OF SECTION 26 05 33

THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260544 - SLEEVES AND SLEEVE SEALS FOR ELECTRICAL RACEWAYS AND CABLING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

A. Section Includes:

1. Sleeves for raceway and cable penetration of non-fire-rated construction walls and floors.
2. Sleeve-seal systems.
3. Sleeve-seal fittings.
4. Grout.
5. Silicone sealants.

B. Related Requirements:

1. Section 078400 "Firestopping" for penetration fire-stopping installed in fire-resistance-rated walls, horizontal assemblies, and smoke barriers, with and without penetrating items.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 SUBMITTALS

- A. Product Data: For each type of product.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 SLEEVES

A. Wall Sleeves:

1. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 80, zinc coated, plain ends.



- B. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies: Galvanized-steel sheet; 0.0239-inch (0.6-mm) minimum thickness; round tube closed with welded longitudinal joint, with tabs for screw-fastening the sleeve to the board.

2.2 GROUT

- A. Description: Nonshrink; recommended for interior and exterior sealing openings in non-fire-rated walls or floors.
- B. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- C. Design Mix: 5000-psi (34.5-MPa), 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

2.3 SILICONE SEALANTS

- A. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants of grade indicated below.
 - 1. Grade: Pourable (self-leveling) formulation for openings in floors and other horizontal surfaces that are not fire rated.
 - 2. Sealant will have VOC content of g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).
 - 3. Sealant will comply with the testing and product requirements of the California Department of Health Services' "Standard Practice for the Testing of Volatile Organic Emissions from Various Sources Using Small-Scale Environmental Chambers."
- B. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 SLEEVE INSTALLATION FOR NON-FIRE-RATED ELECTRICAL PENETRATIONS

- A. Comply with NECA 1.
- B. Comply with NEMA VE 2 for cable tray and cable penetrations.
- C. Sleeves for Conduits Penetrating Above-Grade Non-Fire-Rated Concrete and Masonry-Unit Floors and Walls:



1. Interior Penetrations of Non-Fire-Rated Walls and Floors:
 - a. Seal annular space between sleeve and raceway or cable, using joint sealant appropriate for size, depth, and location of joint. Comply with requirements in Section 079200 "Joint Sealants."
 - b. Seal space outside of sleeves with mortar or grout. Pack sealing material solidly between sleeve and wall so no voids remain. Tool exposed surfaces smooth; protect material while curing.
2. Use pipe sleeves unless penetration arrangement requires rectangular sleeved opening.
3. Size pipe sleeves to provide 1/4-inch (6.4-mm) annular clear space between sleeve and raceway or cable unless sleeve seal is to be installed or unless seismic criteria require different clearance.
4. Install sleeves for wall penetrations unless core-drilled holes or formed openings are used. Install sleeves during erection of walls. Cut sleeves to length for mounting flush with both surfaces of walls. Deburr after cutting.

D. Sleeves for Conduits Penetrating Non-Fire-Rated Gypsum Board Assemblies:

1. Use circular metal sleeves unless penetration arrangement requires rectangular sleeved opening.
2. Seal space outside of sleeves with approved joint compound for gypsum board assemblies.

3.3 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at raceway entries into building.
- B. Install type and number of sealing elements recommended by manufacturer for raceway or cable material and size. Position raceway or cable in center of sleeve. Assemble mechanical sleeve seals and install them in annular space between raceway or cable and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make watertight seal.

3.4 SLEEVE-SEAL-FITTING INSTALLATION

- A. Install sleeve-seal fittings in new walls and slabs as they are constructed.
- B. Assemble fitting components of length to be flush with both surfaces of concrete slabs and walls. Position water stop flange to be centered in concrete slab or wall.
- C. Secure nailing flanges to concrete forms.
- D. Using grout, seal the space around outside of sleeve-seal fittings.

END OF SECTION 26 05 44



THIS PAGE INTENTIONALLY LEFT BLANK



SECTION 260553 - IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. This Section includes electrical identification materials and devices required to comply with ANSI C2, the NYC Electrical Code, and OSHA standards.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 SUBMITTALS

- A. Product Data: For each electrical identification product indicated.
- B. Samples: For each type of label and sign to illustrate size, colors, lettering style, mounting provisions, and graphic features of identification products.
- C. Identification Schedule: An index of nomenclature of electrical equipment and system components used in identification signs and labels.

1.5 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Comply with ANSI A13.1 and IEEE C2.
- C. Comply with NFPA 70, NYCEC.
- D. Comply with 29 CFR 1910.144 and 29 CFR 1910.145.
- E. Comply with ANSI Z535.4 for safety signs and labels.
- F. Adhesive-attached labeling materials, including label stocks, laminating adhesives, and inks used by label printers, will comply with UL 969.



1.6 COORDINATION

- A. Coordinate identification names, abbreviations, colors, and other features with requirements in other Sections requiring identification applications, Drawings, Shop Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual; and with those required by codes, standards, and 29 CFR 1910.145. Use consistent designations throughout Project.
- B. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- C. Coordinate installation of identifying devices with location of access panels and doors.
- D. Install identifying devices before installing acoustical ceilings and similar concealment.

PART 2 - PRODUCTS

2.1 POWER AND CONTROL RACEWAY IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each raceway size.
- B. Colors for Raceways Carrying Circuits at 600 V or Less:
 - 1. Black letters on a white field.
 - 2. Legend: Indicate voltage and system or service type. Indicate where served from and what is being fed..
- C. Vinyl Labels for Raceways Carrying Circuits at 600 V or Less: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- D. Snap-Around Labels for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.
- E. Snap-Around, Color-Coding Bands for Raceways Carrying Circuits at 600 V or Less: Slit, pretensioned, flexible, solid-colored acrylic sleeve, 2 inches (50 mm) long, with diameter sized to suit diameter of raceway or cable it identifies and to stay in place by gripping action.
- F. Metal Tags: Brass or aluminum, 2 by 2 by 0.05 inch (50 by 50 by 1.3 mm), with stamped legend, punched for use with self-locking cable tie fastener.
- G. Write-On Tags: Polyester tag, 0.015 inch (0.38 mm) thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
 - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.



2.2 ARMORED AND METAL-CLAD CABLE IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each cable size.
- B. Colors for Cables Carrying Circuits at 600 V and Less:
 - 1. Black letters on a white field.
 - 2. Legend: Indicate voltage and system or service type. Indicate where fed from and what it is serving.
- C. Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- D. Self-Adhesive Vinyl Tape: Colored, heavy duty, waterproof, fade resistant; 2 inches (50 mm) wide; compounded for outdoor use.
- E. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around cable it identifies. Full shrink recovery at a maximum of 200 deg F (93 deg C). Comply with UL 224.

2.3 POWER AND CONTROL CABLE IDENTIFICATION MATERIALS

- A. Comply with ANSI A13.1 for minimum size of letters for legend and for minimum length of color field for each cable size.
- B. Vinyl Labels: Preprinted, flexible label laminated with a clear, weather- and chemical-resistant coating and matching wraparound clear adhesive tape for securing ends of legend label.
- C. Self-Adhesive, Self-Laminating Polyester Labels: Preprinted, 3-mil- (0.08-mm-) thick flexible label with acrylic pressure-sensitive adhesive that provides a clear, weather- and chemical-resistant, self-laminating, protective shield over the legend. Labels sized to fit the cable diameter such that the clear shield overlaps the entire printed legend.
- D. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around cable it identifies. Full shrink recovery at a maximum of 200 deg F (93 deg C). Comply with UL 224.
- E. Metal Tags: Brass or aluminum, 2 by 2 by 0.05 inch (50 by 50 by 1.3 mm), with stamped legend, punched for use with self-locking cable tie fastener.
- F. Write-On Tags: Polyester tag, 0.015 inch (0.38 mm) thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
 - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
- G. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of cable it identifies and to stay in place by gripping action.



- H. Snap-Around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeve, 2 inches (50 mm) long, with diameter sized to suit diameter of cable it identifies and to stay in place by gripping action.

2.4 CONDUCTOR IDENTIFICATION MATERIALS

- A. Color-Coding Conductor Tape: Colored, self-adhesive vinyl tape not less than 3 mils (0.08 mm) thick by 1 to 2 inches (25 to 50 mm) wide.
- B. Self-Adhesive, Self-Laminating Polyester Labels: Preprinted, 3-mil- (0.08-mm-) thick flexible label with acrylic pressure-sensitive adhesive that provides a clear, weather- and chemical-resistant, self-laminating, protective shield over the legend. Labels sized to fit the conductor diameter such that the clear shield overlaps the entire printed legend.
- C. Snap-Around Labels: Slit, pretensioned, flexible, preprinted, color-coded acrylic sleeve, with diameter sized to suit diameter of conductor it identifies and to stay in place by gripping action.
- D. Snap-Around, Color-Coding Bands: Slit, pretensioned, flexible, solid-colored acrylic sleeve with diameter sized to suit diameter of conductor it identifies and to stay in place by gripping action.
- E. Heat-Shrink Preprinted Tubes: Flame-retardant polyolefin tube with machine-printed identification label. Sized to suit diameter of and shrinks to fit firmly around conductor it identifies. Full shrink recovery at a maximum of 200 deg F (93 deg C). Comply with UL 224.
- F. Marker Tapes: Vinyl or vinyl-cloth, self-adhesive wraparound type, with circuit identification legend machine printed by thermal transfer or equivalent process.
- G. Write-On Tags: Polyester tag, 0.015 inch (0.38 mm) thick, with corrosion-resistant grommet and cable tie for attachment to conductor or cable.
 - 1. Marker for Tags: Permanent, waterproof, black ink marker recommended by tag manufacturer.
 - 2. Labels for Tags: Self-adhesive label, machine-printed with permanent, waterproof, black ink recommended by printer manufacturer, sized for attachment to tag.

2.5 WARNING LABELS AND SIGNS

- A. Comply with NFPA 70 and 29 CFR 1910.145.
- B. Self-Adhesive Warning Labels: Factory-printed, multicolor, pressure-sensitive adhesive labels, configured for display on front cover, door, or other access to equipment unless otherwise indicated.
- C. Baked-Enamel Warning Signs:
 - 1. Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for application.
 - 2. 1/4-inch (6.4-mm) grommets in corners for mounting.
 - 3. Nominal size, 7 by 10 inches (180 by 250 mm).



2.6 EQUIPMENT IDENTIFICATION LABELS

- A. Adhesive Film Label: Machine printed, in black, by thermal transfer or equivalent process. Minimum letter height will be 3/8 inch (10 mm).
- B. Adhesive Film Label with Clear Protective Overlay: Machine printed, in black, by thermal transfer or equivalent process. Minimum letter height will be 3/8 inch (10 mm). Overlay will provide a weatherproof and UV-resistant seal for label.
- C. Self-Adhesive, Engraved, Laminated Acrylic or Melamine Label: Adhesive backed, with white letters on a dark-gray background. Minimum letter height will be 3/8 inch (10 mm).
- D. Engraved, Laminated Acrylic or Melamine Label: Punched or drilled for screw mounting. White letters on a dark-gray background. Minimum letter height will be 3/8 inch (10 mm).
- E. Stenciled Legend: In nonfading, waterproof, black ink or paint. The minimum letter height will be 1 inch (25 mm).

2.7 CABLE TIES

- A. General-Purpose Cable Ties: Fungus inert, self-extinguishing, one piece, self-locking, Type 6/6 nylon.
 - 1. Minimum Width: 3/16 inch (5 mm).
 - 2. Tensile Strength at 73 deg F (23 deg C), According to ASTM D 638: 12,000 psi (82.7 MPa).
 - 3. Temperature Range: Minus 40 to plus 185 deg F (Minus 40 to plus 85 deg C).
 - 4. Color: Black except where used for color-coding.
- B. Plenum-Rated Cable Ties: Self extinguishing, UV stabilized, one piece, self locking.
 - 1. Minimum Width: 3/16 inch (5 mm).
 - 2. Tensile Strength at 73 deg F (23 deg C), According to ASTM D 638: 7000 psi (48.2 MPa).
 - 3. UL 94 Flame Rating: 94V-0.
 - 4. Temperature Range: Minus 50 to plus 284 deg F (Minus 46 to plus 140 deg C).
 - 5. Color: Black.

2.8 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Paint: Comply with requirements in painting Sections for paint materials and application requirements. Select paint system applicable for surface material and location (exterior or interior).
- B. Fasteners for Labels and Signs: Self-tapping, stainless-steel screws or stainless-steel machine screws with nuts and flat and lock washers.



PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 INSTALLATION

- A. Verify identity of each item before installing identification products.
- B. Location: Install identification materials and devices at locations for most convenient viewing without interference with operation and maintenance of equipment.
- C. Apply identification devices to surfaces that require finish after completing finish work.
- D. Self-Adhesive Identification Products: Clean surfaces before application, using materials and methods recommended by manufacturer of identification device.
- E. Attach signs and plastic labels that are not self-adhesive type with mechanical fasteners appropriate to the location and substrate.
- F. Attach plastic raceway and cable labels that are not self-adhesive type with clear vinyl tape with adhesive appropriate to the location and substrate.
- G. System Identification Color-Coding Bands for Raceways and Cables: Each color-coding band will completely encircle cable or conduit. Place adjacent bands of two-color markings in contact, side by side. Locate bands at changes in direction, at penetrations of walls and floors, at 50-foot (15-m) maximum intervals in straight runs, and at 25-foot (7.6-m) maximum intervals in congested areas.
- H. Aluminum Wraparound Marker Labels and Metal Tags: Secure tight to surface of conductor or cable at a location with high visibility and accessibility.
- I. Cable Ties: For attaching tags. Use general-purpose type, except as listed below:
 - 1. In Spaces Handling Environmental Air: Plenum rated.
- J. Painted Identification: Comply with requirements in painting Sections 099000 "Painting and Coating" for surface preparation and paint application.

3.3 IDENTIFICATION SCHEDULE

- A. Accessible Raceways and Metal-Clad Cables, 600 V or Less, for Service, Feeder, and Branch Circuits More Than 60A, and 120 V to ground: Identify with self-adhesive vinyl label. Install labels at 30-foot (10-m) maximum intervals.
- B. Accessible Raceways and Cables within Buildings: Identify the covers of each junction and pull box of the following systems with self-adhesive vinyl labels with the wiring system legend and system voltage. System legends will be as follows:



1. Power.
- C. Power-Circuit Conductor Identification, 600 V or Less: For conductors in vaults, pull and junction boxes, manholes, and handholes, use color-coding conductors insulation to identify the phase.
 1. Color-Coding for Phase and Voltage Level Identification, 600 V or Less: Use colors listed below for ungrounded service, feeder and branch-circuit conductors.
 - a. Color will be factory applied for sizes larger than No. 8 AWG.
 - b. Colors for 208/120-V Circuits:
 - 1) Phase A: Black.
 - 2) Phase B: Red.
 - 3) Phase C: Blue.
 - c. Field-Applied, Color-Coding Conductor Tape: Apply in half-lapped turns for a minimum distance of 6 inches (150 mm) from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Locate bands to avoid obscuring factory cable markings.
 - D. Install instructional sign including the color-code for grounded and ungrounded conductors using adhesive-film-type labels.
 - E. Control-Circuit Conductor Identification: For conductors and cables in pull and junction boxes, manholes, and handholes, use self-adhesive, self-laminating polyester labels with the conductor or cable designation, origin, and destination.
 - F. Control-Circuit Conductor Termination Identification: For identification at terminations provide self-adhesive, self-laminating polyester labels with the conductor designation.
 - G. Conductors to Be Extended in the Future: Attach write-on tags to conductors and list source.
 - H. Auxiliary Electrical Systems Conductor Identification: Identify field-installed alarm, control, and signal connections.
 1. Identify conductors, cables, and terminals in enclosures and at junctions, terminals, and pull points. Identify by system and circuit designation.
 2. Use system of marker tape designations that is uniform and consistent with system used by manufacturer for factory-installed connections.
 3. Coordinate identification with Project Drawings, manufacturer's wiring diagrams, and the Operation and Maintenance Manual.
 - I. Workspace Indication: Install floor marking tape to show working clearances in the direction of access to live parts. Workspace will be as required by NFPA 70 and 29 CFR 1926.403 unless otherwise indicated. Do not install at flush-mounted panelboards and similar equipment in finished spaces.
 - J. Warning Labels for Indoor Cabinets, Boxes, and Enclosures for Power and Lighting: Baked-enamel warning signs.



1. Comply with 29 CFR 1910.145.
 2. Identify system voltage with black letters on an orange background.
 3. Apply to exterior of door, cover, or other access.
- K. Equipment Identification Labels: On each unit of equipment, install unique designation label that is consistent with wiring diagrams, schedules, and the Operation and Maintenance Manual. Apply labels to disconnect switches and protection equipment, central or master units, control panels, control stations, terminal cabinets, and racks of each system. Systems include power, lighting, control, communication, signal, monitoring, and alarm systems unless equipment is provided with its own identification.
1. Labeling Instructions:
 - a. Indoor Equipment: Engraved, laminated acrylic or melamine label. Unless otherwise indicated, provide a single line of text with 1/2-inch- (13-mm-) high letters on 1-1/2-inch- (38-mm-) high label; where two lines of text are required, use labels 2 inches (50 mm) high.
 - b. Unless provided with self-adhesive means of attachment, fasten labels with appropriate mechanical fasteners that do not change the NEMA or NRTL rating of the enclosure.
 - c. Labeling will include Equipment Designation, Where Equipment is Fed From and what equipment is serving. Voltage and Phasing will also be indicated.
 - d. Wiring Devises: Labeling will include Circuit Number and Panel Designation served from.
 2. Equipment to Be Labeled:
 - a. Receptacle & Switches

END OF SECTION 26 05 53



SECTION 260923 - LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Indoor occupancy/vacancy sensors.
- B. Related Requirements:
 - 1. Section 262726 "Wiring Devices" for wall-switch occupancy sensors and manual light switches.

1.3 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: Show installation details for occupancy and light-level sensors.
 - 1. Interconnection diagrams showing field-installed wiring.
 - 2. Include diagrams for power, signal, and control wiring.

1.5 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For each type of lighting control device to include in emergency, operation, and maintenance manuals.

1.7 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".



PART 2 - PRODUCTS

2.1 INDOOR OCCUPANCY/VACANCY SENSORS

- A. Manufacturers: Subject to compliance with requirements, provide products of one of the following.
1. Cooper/Eaton
 2. Watt Stopper, Legrand.
 3. Acuity Brands Lighting, Inc.
 4. Or approved equal.
- B. General Requirements for Sensors: Wall- or ceiling-mounted, solid-state indoor occupancy sensors with a separate power pack.
1. Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
 2. Operation: Unless otherwise indicated, turn lights on manually, and turn them off when unoccupied; with a time, delay for turning lights off, adjustable over a minimum range of 1 to 15 minutes.
 3. Sensor Output: Contacts rated to operate the connected relay, complying with UL 773A. Sensor is powered from the power pack.
 4. Power Pack: Dry contacts rated for 20-A ballast load at 12-V ac, for 13-A tungsten at 120-V ac, and for 1 hp at 120-V ac. The sensor has 24-V dc, 150-mA, Class 2 power source, as defined by NFPA 70.
 5. Mounting:
 - a. Sensor: Suitable for mounting in any position on a standard outlet box.
 - b. Relay: Externally mounted through a 1/2-inch (13-mm) knockout in a standard electrical enclosure.
 - c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
 6. Indicator: Digital display, to show when motion is detected during testing and normal operation of sensor.
 7. Bypass Switch: Override the "on" function in case of sensor failure.
 8. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc (21.5 to 2152 lux); turn lights off when selected lighting level is present.
- C. Dual-Technology Type: Ceiling and Wall mounted; detect occupants in coverage area using PIR and ultrasonic detection methods. The particular technology or combination of technologies that control on-off functions is selectable in the field by operating controls on unit.
1. Sensitivity Adjustment: Separate for each sensing technology.
 2. Detector Sensitivity: Detect occurrences of 6-inch- (150-mm-) minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. (232 sq. cm) and detect a person of average size and weight moving not less than 12 inches (305 mm) in either a horizontal or a vertical manner at an approximate speed of 12 inches/s (305 mm/s).
 3. Detection Coverage (Standard Room): Detect occupancy anywhere within a circular area of 1000 sq. ft. (93 sq. m) when mounted on a 96-inch- (2440-mm-) high ceiling.



2.2 CONDUCTORS AND CABLES

- A. Power Wiring to Supply Side of Remote-Control Power Sources: Not smaller than No. 12 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Classes 2 and 3 Control Cable: Multi-conductor cable with stranded-copper conductors not smaller than No. 18 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- C. Class 1 Control Cable: Multi-conductor cable with stranded-copper conductors not smaller than No. 16 AWG. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables."

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 SENSOR INSTALLATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, smoke detectors, fire-suppression systems, and partition assemblies.
- B. Install and aim sensors in locations to achieve not less than 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

3.3 CONTACTOR INSTALLATION

- A. Mount electrically held lighting contactors with elastomeric isolator pads to eliminate structure-borne vibration, unless contactors are installed in an enclosure with factory-installed vibration isolators.

3.4 WIRING INSTALLATION

- A. Wiring Method: Comply with Section 260519 "Low-Voltage Electrical Power Conductors and Cables." Minimum conduit size is 1/2 inch (13 mm).
- B. Wiring within Enclosures: Comply with NECA 1. Separate power-limited and non-power-limited conductors according to conductor manufacturer's written instructions.
- C. Size conductors according to lighting control device manufacturer's written instructions unless otherwise indicated.
- D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.



3.5 IDENTIFICATION

- A. Identify components and power and control wiring according to Section 260553 "Identification for Electrical Systems."
 - 1. Identify controlled circuits in lighting contactors.
 - 2. Identify circuits or luminaires controlled by photoelectric and occupancy sensors at each sensor.
- B. Label time switches and contactors with a unique designation.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to evaluate lighting control devices and perform tests and inspections.
- B. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.
- C. Perform the following tests and inspections with the assistance of a factory-authorized service representative:
 - 1. Operational Test: After installing time switches and sensors, and after electrical circuitry has been energized, start units to confirm proper unit operation.
 - 2. Test and adjust controls and safety. Replace damaged and malfunctioning controls and equipment.
- D. Lighting control devices will be considered defective if they do not pass tests and inspections.
- E. Prepare test and inspection reports.

3.7 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months from date of Substantial Completion, provide on-site assistance in adjusting sensors to suit actual occupied conditions. Provide up to two visits to the Project during other-than-normal occupancy hours for this purpose.
 - 1. For occupancy and motion sensors, verify operation at outer limits of detector range. Set time delay to suit the City of New York's operations.
 - 2. For daylighting controls, adjust set points and dead-band controls to suit the City of New York's operations.

3.8 DEMONSTRATION

- A. Engage a factory-authorized service representative to instruct the City of New York's maintenance personnel to adjust, operate, and maintain lighting control devices.

END OF SECTION 26 09 23



SECTION 26 27 26 - WIRING DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Receptacles, receptacles with integral GFCI, and associated device plates.
 - 2. Wall-switch.

1.3 DEFINITIONS

- A. GFCI: Ground-fault circuit interrupter.
- B. Pigtail: Short lead used to connect a device to a branch-circuit conductor.
- C. UTP: Unshielded twisted pair.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Receptacles for City of New York-Furnished Equipment: Match plug configurations.

1.5 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.6 SUBMITTALS

- A. Product Data: For each type of product.
- B. Shop Drawings: List of legends and description of materials and process used for premarking wall plates.
- C. Samples: One for each type of device and wall plate specified, in each color specified.



1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For wiring devices to include in all manufacturers' packing-label warnings and instruction manuals that include labeling conditions.

1.8 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers' Names: Shortened versions (shown in parentheses) of the following manufacturers' names are used in other Part 2 articles:
 - 1. Pass & Seymour/Legrand (Pass & Seymour).
 - 2. Hubbell Incorporated;
 - 3. Cooper Wiring Devices;
 - 4. Or approved equal.
- B. Source Limitations: Obtain each type of wiring device and associated wall plate from single source from single manufacturer.
- C. Finishes: Color as selected by Commissioner from manufacturer's full range.

2.2 GENERAL WIRING-DEVICE REQUIREMENTS

- A. Wiring Devices, Components, and Accessories: Listed and labeled as defined in NFPA 70 and NYC Electrical Code, by a qualified testing agency, and marked for intended location and application.
- B. Comply with NFPA 70 and NYC Electrical Code.6
- C. Finishes: Color as selected by Commissioner from the manufacturer's full range.

2.3 STRAIGHT-BLADE RECEPTACLES

- A. Convenience Receptacles, 125 V, 20 A: Comply with NEMA WD 1, Configuration 5-20R, UL 498.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Hubbell; HBL5351 (single), HBL5352 (duplex).
 - b. Leviton; 5891 (single), 5352 (duplex).
 - c. Pass & Seymour; 5361 (single), 5362 (duplex).
 - d. Or approved equal.

2.4 GFCI RECEPTACLES

- A. General Description:



1. Straight blade, non-feed-through type.
2. Comply with NEMA WD 1, NEMA WD 6, UL 498, UL 943 Class A, and FS W-C-596.
3. Include indicator light that shows when the GFCI has malfunctioned and no longer provides proper GFCI protection.

B. Duplex GFCI Convenience Receptacles, 125 V, 20 A:

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Pass & Seymour; 2095.
 - b. Hubbell; GFR5352L.
 - c. Cooper; VGF20.
 - d. Or approved equal.

2.5 TOGGLE SWITCHES

A. Comply with NEMA WD 1, UL 20, and FS W-S-896.

B. Switches, 120 V, 20 A:

1. Products: Subject to compliance with requirements, provide one of the following:
 - 1) Single Pole:
 - a) Cooper; AH1221.
 - b) Hubbell; HBL1221.
 - c) Pass & Seymour; CSB20AC1.
 - d) Or approved equal.
 - 2) Three Way:
 - a) Cooper; AH1223.
 - b) Hubbell; HBL1223.
 - c) Pass & Seymour; CSB20AC3.
 - d) Or approved equal.

2.6 DECORATOR-STYLE DEVICES

A. Convenience Receptacles: Square face, 125 V, 15 A; comply with NEMA WD 1, NEMA WD 6 Configuration 5-15R, and UL 498.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 6252.
 - b. Hubbell; DR15.
 - c. Pass & Seymour; 26252.
 - d. Or approved equal.

B. GFCI, Non-Feed - Through Type, Convenience Receptacles: Square face, 125 V, 15 A; comply with NEMA WD 1, NEMA WD 6 Configuration 5-15R, UL 498, and UL 943 Class A.



1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; VGF15.
 - b. Hubbell; GF15LA.
 - c. Leviton; 8599.
 - d. Pass & Seymour; 1594.
 - e. Or approved equal.

C. Toggle Switches, Square Face, 120 V, 15 A: Comply with NEMA WD 1, UL 20, and FS W-S-896.

1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Cooper; 7621 (single pole), 7623 (three way).
 - b. Hubbell; DS115 (single pole), DS315 (three way).
 - c. Leviton; 5621-2 (single pole), 5623-2 (three way).
 - d. Pass & Seymour; 2621 (single pole), 2623 (three way).
 - e. Or approved equal.

2.7 WALL PLATES

A. Single and combination types will match corresponding wiring devices.

1. Plate-Securing Screws: Metal with head color to match plate finish.
2. Material for Finished Spaces: 0.035-inch- (1-mm-) thick, satin-finished, Type 302 stainless steel or as required by Commissioner.
3. Material for Unfinished Spaces: Galvanized steel.
4. Material for Damp Locations: Cast aluminum with spring-loaded lift cover, and listed and labeled for use in wet and damp locations.

B. Wet-Location, Weatherproof Cover Plates: NEMA 250, complying with Type 3R, weather-resistant, die-cast aluminum with lockable in use cover.

2.8 FINISHES

A. Device Color:

1. Wiring Devices Connected to Normal Power System: As selected by Commissioner unless otherwise indicated or required by NFPA 70, NYC Electrical Code or device listing.

B. Wall Plate Color: For plastic covers, match device color.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

A. Refer to DDC General Conditions for execution requirements.



3.2 INSTALLATION

- A. Comply with NECA 1, including mounting heights listed in that standard, unless otherwise indicated.
- B. Coordination with Other Trades:
 - 1. Protect installed devices and their boxes. Do not place wall finish materials over device boxes and do not cut holes for boxes with routers that are guided by riding against outside of boxes.
 - 2. Keep outlet boxes free of plaster, drywall joint compound, mortar, cement, concrete, dust, paint, and other material that may contaminate the raceway system, conductors, and cables.
 - 3. Install device boxes in brick or block walls so that the cover plate does not cross a joint unless the joint is troweled flush with the face of the wall.
 - 4. Install wiring devices after all wall preparation, including painting, is complete.
- C. Conductors:
 - 1. Do not strip insulation from conductors until right before they are spliced or terminated on devices.
 - 2. Strip insulation evenly around the conductor using tools designed for the purpose. Avoid scoring or nicking of solid wire or cutting strands from stranded wire.
 - 3. The length of free conductors at outlets for devices will meet provisions of NFPA 70, Article 300, without pigtails.
 - 4. Existing Conductors:
 - a. Cut back and pigtail, or replace all damaged conductors.
 - b. Straighten conductors that remain and remove corrosion and foreign matter.
 - c. Pigtailling existing conductors is permitted, provided the outlet box is large enough.
- D. Device Installation:
 - 1. Replace devices that have been in temporary use during construction and that were installed before building finishing operations were complete.
 - 2. Keep each wiring device in its package or otherwise protected until it is time to connect conductors.
 - 3. Do not remove surface protection, such as plastic film and smudge covers, until the last possible moment.
 - 4. Connect devices to branch circuits using pigtails that are not less than 6 inches (152 mm) in length.
 - 5. When there is a choice, use side wiring with binding-head screw terminals. Wrap solid conductor tightly clockwise, two-thirds to three-fourths of the way around terminal screw.
 - 6. Use a torque screwdriver when a torque is recommended or required by manufacturer.
 - 7. When conductors larger than No. 12 AWG are installed on 15- or 20-A circuits, splice No. 12 AWG pigtails for device connections.
 - 8. Tighten unused terminal screws on the device.
 - 9. When mounting into metal boxes, remove the fiber or plastic washers used to hold device-mounting screws in yokes, allowing metal-to-metal contact.
 - 10. Install devices and assemblies level, plumb, and square with building lines.
 - 11. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' written instructions.



12. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical, and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.
13. Remove wall plates and protect devices and assemblies during painting.
14. Provide barrier between different voltages

E. Receptacle Orientation:

1. Install ground pin of vertically mounted receptacles down, and on horizontally mounted receptacles to the right.

F. Device Plates: Do not use oversized or extra-deep plates. Repair and restore wall finishes and remount outlet boxes when standard device plates do not fit flush or do not cover rough wall opening.

G. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.

H. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

3.3 GFCI RECEPTACLES

- A. Install non-feed-through-type GFCI receptacles where protection of downstream receptacles is not required.

3.4 IDENTIFICATION

- A. Comply with Section 260553 "Identification for Electrical Systems."
- B. Identify each receptacle with panelboard identification and circuit number. Use hot, stamped, or engraved machine printing with black-filled lettering on face of plate, and durable wire markers or tags inside outlet boxes.

3.5 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
 1. After installing wiring devices and after electrical circuitry has been energized, test for proper polarity, ground continuity, and compliance with requirements.
 2. Test GFCI operation with both local and remote fault simulations according to manufacturer's written instructions.
- B. Remove malfunctioning units, replace them with new units, and retest as specified above.

END OF SECTION 26 27 26



SECTION 262816 - ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Fusible switches.
 - 2. Non-fusible switches.
 - 3. Receptacle switches.
 - 4. Molded-case circuit breakers (MCCBs).

1.3 DEFINITIONS

- A. NC: Normally closed.
- B. NO: Normally open.
- C. SPDT: Single pole, double throw.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of enclosed switch, circuit breaker, accessory, and component indicated. Include dimensioned elevations, sections, weights, and manufacturers' technical data on features, performance, electrical characteristics, ratings, accessories, and finishes.
 - 1. Enclosure types and details for types other than NEMA 250, Type 1.
 - 2. Current and voltage ratings.
 - 3. Short-circuit current ratings (interrupting and withstand, as appropriate).
 - 4. Include evidence of NRTL listing for series rating of installed devices.
 - 5. Detail features, characteristics, ratings, and factory settings of individual overcurrent protective devices, accessories, and auxiliary components.
 - 6. Include time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device. Submit on translucent log-log graph paper.
- B. Shop Drawings: For enclosed switches and circuit breakers. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Wiring Diagrams: For power, signal, and control wiring.



1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified testing agency.
- B. Seismic Qualification Certificates: For enclosed switches and circuit breakers, accessories, and components, from manufacturer.
 - 1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
 - 2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
 - 3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.
- C. Field quality-control reports.
 - 1. Test procedures used.
 - 2. Test results that comply with requirements.
 - 3. Results of failed tests and corrective action taken to achieve test results that comply with requirements.
- D. Manufacturer's field service report.

1.6 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For enclosed switches and circuit breakers to include in emergency, operation, and maintenance manuals. Include the following:
 - 1. Manufacturer's written instructions for testing and adjusting enclosed switches and circuit breakers.
 - 2. Time-current coordination curves (average melt) for each type and rating of overcurrent protective device; include selectable ranges for each type of overcurrent protective device. Submit on translucent log-log graph paper.

1.7 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".

1.8 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".
- B. Testing Agency Qualifications: Member Company of NETA or an NRTL.
 - 1. Testing Agency's Field Supervisor: Currently certified by NETA to supervise on-site testing.
- C. Source Limitations: Obtain enclosed switches and circuit breakers, overcurrent protective devices, components, and accessories, within same product category, from single source from single manufacturer.



- D. Product Selection for Restricted Space: Drawings indicate maximum dimensions for enclosed switches and circuit breakers, including clearances between enclosures, and adjacent surfaces and other items. Comply with indicated maximum dimensions.
- E. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- F. Comply with NFPA 70.

1.9 PROJECT CONDITIONS

- A. Environmental Limitations: Rate equipment for continuous operation under the following conditions unless otherwise indicated:
 - 1. Ambient Temperature: Not less than minus 22 deg F (minus 30 deg C) and not exceeding 104 deg F (40 deg C).
 - 2. Altitude: Not exceeding 6600 feet (2010 m).
- B. Interruption of Existing Electric Service: Do not interrupt electric service to facilities occupied by the City of New York unless permitted under the following conditions and then only after arranging to provide temporary electric service according to requirements indicated:
 - 1. Notify the Commissioner no fewer than seven days in advance of proposed interruption of electric service.
 - 2. Indicate method of providing temporary electric service.
 - 3. Do not proceed with interruption of electric service without the Commissioner's written permission.
 - 4. Comply with NFPA 70E.

1.10 COORDINATION

- A. Coordinate layout and installation of switches, circuit breakers, and components with equipment served and adjacent surfaces. Maintain required workspace clearances and required clearances for equipment access doors and panels.

PART 2 - PRODUCTS

2.1 FUSIBLE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
 - 2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
 - 3. Siemens Energy & Automation, Inc.
 - 4. All City Switchboard
 - 5. Atlas
 - 6. Electro-Tech
 - 7. Lincoln Electric
 - 8. Or approved equal



- B. Type GD, General Duty, Single Throw, 240-V ac, 800 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with cartridge fuse interiors to accommodate specified fuses, lockable handle with capability to accept two padlocks, and interlocked with cover in closed position.
- C. Type HD, Heavy Duty, Single Throw, 240, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- D. Type HD, Heavy Duty, Six Pole, Single Throw, 240, 600-V ac, 200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- E. Type HD, Heavy Duty, Double Throw, 240, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, with clips or bolt pads to accommodate specified fuses, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- F. Accessories:
 - 1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
 - 2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 - 3. Isolated Ground Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 - 4. Class R Fuse Kit: Provides rejection of other fuse types when Class R fuses are specified.
 - 5. Auxiliary Contact Kit: Two NO/NC (Form "C") auxiliary contact(s), arranged to activate before switch blades open.
 - 6. Hook-stick Handle: Allows use of a hook-stick to operate the handle.
 - 7. Lugs: Compression type, suitable for number, size, and conductor material.
 - 8. Service-Rated Switches: Labeled for use as service equipment.
 - 9. Accessory Control Power Voltage: Remote mounted and powered; 120-V ac derived from power feed.

2.2 NON-FUSIBLE SWITCHES

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
 - 2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
 - 3. Siemens Energy & Automation, Inc.
 - 4. All City Switchboard
 - 5. Atlas
 - 6. Electro-Tech
 - 7. Lincoln Electric
 - 8. Or approved equal.
- B. Type GD, General Duty, Single Throw, 600 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept two padlocks, and interlocked with cover in closed position.



- C. Type HD, Heavy Duty, Single Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- D. Type HD, Heavy Duty, Six Pole, Single Throw, 600-V ac, 200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- E. Type HD, Heavy Duty, Double Throw, 600-V ac, 1200 A and Smaller: UL 98 and NEMA KS 1, horsepower rated, lockable handle with capability to accept three padlocks, and interlocked with cover in closed position.
- F. Accessories:
 - 1. Equipment Ground Kit: Internally mounted and labeled for copper and aluminum ground conductors.
 - 2. Neutral Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 - 3. Isolated Ground Kit: Internally mounted; insulated, capable of being grounded and bonded; labeled for copper and aluminum neutral conductors.
 - 4. Auxiliary Contact Kit: Two NO/NC (Form "C") auxiliary contact(s), arranged to activate before switch blades open.
 - 5. Hook-stick Handle: Allows use of a hook-stick to operate the handle.
 - 6. Lugs: Compression type, suitable for number, size, and conductor material.
 - 7. Accessory Control Power Voltage: Remote mounted and powered; 120-V ac.

2.3 MOLDED-CASE CIRCUIT BREAKERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eaton Electrical Inc.; Cutler-Hammer Business Unit.
 - 2. General Electric Company; GE Consumer & Industrial - Electrical Distribution.
 - 3. Siemens Energy & Automation, Inc.
 - 4. Or approved equal.
- B. General Requirements: Comply with UL 489, NEMA AB 1, and NEMA AB 3, with interrupting capacity to comply with available fault currents.
- C. Thermal-Magnetic Circuit Breakers: Inverse time-current element for low-level overloads and instantaneous magnetic trip element for short circuits. Adjustable magnetic trip setting for circuit-breaker frame sizes 250 A and larger.
- D. Adjustable, Instantaneous-Trip Circuit Breakers: Magnetic trip element with front-mounted, field-adjustable trip setting.
- E. Electronic Trip Circuit Breakers: Field-replaceable rating plug, rms sensing, with the following field-adjustable settings:



1. Instantaneous trip.
 2. Long- and short-time pickup levels.
 3. Long- and short-time time adjustments.
 4. Ground-fault pickup level, time delay, and I²t response.
- F. Current-Limiting Circuit Breakers: Frame sizes 400 A and smaller, and let-through ratings less than NEMA FU 1, RK-5.
- G. Integrally Fused Circuit Breakers: Thermal-magnetic trip element with integral limiter-style fuse listed for use with circuit breaker and trip activation on fuse opening or on opening of fuse compartment door.
- H. Ground-Fault, Circuit-Interrupter (GFCI) Circuit Breakers: Single- and two-pole configurations with Class A ground-fault protection (6-mA trip).
- I. Ground-Fault, Equipment-Protection (GFEP) Circuit Breakers: With Class B ground-fault protection (30-mA trip).
- J. Features and Accessories:
1. Standard frame sizes, trip ratings, and number of poles.
 2. Lugs: Compression type, suitable for number, size, trip ratings, and conductor material.
 3. Application Listing: Appropriate for application; Type SWD for switching fluorescent lighting loads; Type HID for feeding fluorescent and high-intensity discharge lighting circuits.
 4. Ground-Fault Protection: Comply with UL 1053; integrally mounted, self-powered type with mechanical ground-fault indicator; relay with adjustable pickup and time-delay settings, push-to-test feature, internal memory, and shunt trip unit; and three-phase, zero-sequence current transformer/sensor.
 5. Shunt Trip: Trip coil energized from separate circuit, with coil-clearing contact.
 6. Under-voltage Trip: Set to operate at 35 to 75 percent of rated voltage without intentional time delay.
 7. Auxiliary Contacts: Two SPDT switches with "a" and "b" contacts; "a" contacts mimic circuit-breaker contacts, "b" contacts operate in reverse of circuit-breaker contacts.
 8. Alarm Switch: One NO contact that operates only when circuit breaker has tripped.
 9. Key Interlock Kit: Externally mounted to prohibit circuit-breaker operation; key will be removable only when circuit breaker is in off position.
 10. Zone-Selective Interlocking: Integral with ground-fault trip unit; for interlocking ground-fault protection function.
 11. Electrical Operator: Provide remote control for on, off, and reset operations.
 12. Accessory Control Power Voltage: Integrally mounted, self-powered, 120-V ac.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.



3.2 EXAMINATION

- A. Examine elements and surfaces to receive enclosed switches and circuit breakers for compliance with installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 INSTALLATION

- A. Install individual wall-mounted switches and circuit breakers with tops at uniform height unless otherwise indicated.
- B. Temporary Lifting Provisions: Remove temporary lifting eyes, channels, and brackets and temporary blocking of moving parts from enclosures and components.
- C. Install fuses in fusible devices.
- D. Comply with NECA 1.

3.4 IDENTIFICATION

- A. Comply with requirements in Section 260553 "Identification for Electrical Systems."
 - 1. Identify field-installed conductors, interconnecting wiring, and components; provide warning signs.
 - 2. Label each enclosure with engraved metal or laminated-plastic nameplate.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Acceptance Testing Preparation:
 - 1. Test insulation resistance for each enclosed switch and circuit breaker, component, connecting supply, feeder, and control circuit.
 - 2. Test continuity of each circuit.
- C. Tests and Inspections:
 - 1. Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
 - 2. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
 - 3. Perform the following infrared scan tests and inspections and prepare reports:
 - a. Initial Infrared Scanning: After Substantial Completion, but not more than 60 days after Final Acceptance, perform an infrared scan of each enclosed switch and circuit breaker. Remove front panels so joints and connections are accessible to portable scanner.
 - b. Follow-up Infrared Scanning: Perform an additional follow-up infrared scan of each enclosed switch and circuit breaker 11 months after date of Substantial Completion.



- c. Instruments and Equipment: Use an infrared scanning device designed to measure temperature or to detect significant deviations from normal values. Provide calibration record for device.
 - 4. Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.
 - D. Enclosed switches and circuit breakers will be considered defective if they do not pass tests and inspections.
 - E. Prepare test and inspection reports, including a certified report that identifies enclosed switches and circuit breakers and that describes scanning results. Include notation of deficiencies detected, remedial action taken, and observations after remedial action.
- 3.6 ADJUSTING
- A. Adjust moving parts and operable components to function smoothly and lubricate as recommended by manufacturer.

END OF SECTION 26 28 16



SECTION 265119 - LED INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:

- 1. Interior solid-state luminaires that use LED technology.
 - 2. Lighting fixture supports.

- B. Related Requirements:

- 1. Section 260923 "Lighting Control Devices" for automatic control of lighting, including time switches, photoelectric relays, occupancy sensors, and multipole lighting relays and contactors.

1.3 DEFINITIONS

- A. CCT: Correlated color temperature.
- B. CRI: Color Rendering Index.
- C. Fixture: See "Luminaire."
- D. IP: International Protection or Ingress Protection Rating.
- E. LED: Light-emitting diode.
- F. Lumen: Measured output of lamp and luminaire, or both.
- G. Luminaire: Complete lighting unit, including lamp, reflector, and housing.

1.4 ACTION SUBMITTALS

- A. Refer to DDC General Conditions Section 01 33 00 "Submittal Procedures".
- B. Product Data: For each type of product.



1. Arrange in order of luminaire designation.
2. Include data on features, accessories, and finishes.
3. Include physical description and dimensions of luminaires.
4. Include emergency lighting units, including batteries and chargers.
5. Include life, output (lumens, CCT, and CRI), and energy efficiency data.
6. Photometric data and adjustment factors based on laboratory tests, complying with IESNA Lighting Measurements Testing and Calculation Guides, of each lighting fixture type. The adjustment factors will be for lamps and accessories identical to those indicated for the lighting fixture as applied in this Project.
 - a. Manufacturers' Certified Data: Photometric data certified by manufacturer's laboratory with a current accreditation under the National Voluntary Laboratory Accreditation Program for Energy Efficient Lighting Products.
 - b. Testing Agency Certified Data: For indicated luminaires, photometric data certified by a qualified independent testing agency. Photometric data for remaining luminaires will be certified by manufacturer.

C. Shop Drawings: For nonstandard or custom luminaires.

1. Include plans, elevations, sections, and mounting and attachment details.
2. Include details of luminaire assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and location and size of each field connection.
3. Include diagrams for power, signal, and control wiring.

D. Samples: For each luminaire and for each color and texture with standard factory-applied finish.

E. Samples for Initial Selection: For each type of luminaire with custom factory-applied finishes.

1. Include Samples of luminaires and accessories involving color and finish selection.

F. Samples for Verification: For each type of luminaire.

1. Include Samples of luminaires and accessories to verify finish selection.

G. Product Schedule: For luminaires and lamps. Use same designations indicated on Drawings.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plan(s) and other details, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Lighting luminaires.
2. Suspended ceiling components.
3. Partitions and millwork that penetrate the ceiling or extend to within 12 inches (300 mm) of the plane of the luminaires.
4. Structural members to which equipment and or luminaires will be attached.
5. Initial access modules for acoustical tile, including size and locations.
6. Items penetrating finished ceiling, including the following:



- a. Other luminaires.
- b. Air outlets and inlets.
- c. Speakers.
- d. Sprinklers.
- e. Access panels.
- f. Ceiling-mounted projectors.

7. Moldings.

B. Qualification Data: For testing laboratory providing photometric data for luminaires.

C. Seismic Qualification Certificates: For luminaires, accessories, and components, from manufacturer.

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.

D. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

E. Product Certificates: For each type of luminaire.

F. Product Test Reports: For each luminaire, for tests performed by manufacturer and witnessed by a qualified testing agency.

G. Sample warranty.

1.6 QUALITY ASSURANCE

A. Refer to DDC General Conditions Section 01 40 00 "Quality Requirements".

B. Luminaire Photometric Data Testing Laboratory Qualifications: Luminaire manufacturer's laboratory that is accredited under the NVLAP for Energy Efficient Lighting Products.

C. Luminaire Photometric Data Testing Laboratory Qualifications: Provided by an independent agency, with the experience and capability to conduct the testing indicated, that is an NRTL as defined by OSHA in 29 CFR 1910.7, accredited under the NVLAP for Energy Efficient Lighting Products, and complying with the applicable IES testing standards.

D. Provide luminaires from a single manufacturer for each luminaire type.

E. Each luminaire type will be binned within a three-step MacAdam Ellipse to ensure color consistency among luminaires.

F. Mockups: For interior lighting luminaires in room or module mockups, complete with power and control connections.



1. Obtain Commissioner approval of luminaires in mockups before starting installations.
2. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Commissioner specifically approves such deviations in writing.
4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Protect finishes of exposed surfaces by applying a strippable, temporary protective covering before shipping.

1.8 WARRANTY

- A. Warranty: Manufacturer agrees to repair or replace components of luminaires that fail in materials or workmanship within specified warranty period.
- B. Warranty Period: One (1) year from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Subject to compliance with project requirements, luminaires that may be incorporated into the Work include, but are not limited to, the products specified in the Luminaire Schedule or approved equal.
- B. R2 Light Fixture: LED Downlight
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Edison Price
 - b. Alphabet Lighting
 - c. Lightheaded Lighting
 - d. Or approved equal.
- C. R2EM Light Fixture: LED Downlight with EM battery
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Edison Price



- b. Alphabet Lighting
 - c. Lightheaded Lighting
 - d. Or approved equal.
- D. L2 Light Fixture: Recessed LED Linear Light
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Axis Lighting
 - b. Focal Point
 - c. Pinnacle Lighting
 - d. Or approved equal.
- E. L3 Light Fixture: LED Linear Strip Light
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Qtran Lighting
 - b. Tivoli
 - c. Optic Arts
 - d. Or approved equal.
- F. CL1 Light Fixture: Surface Mount LED Linear Downlight
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Focal Point
 - b. Pinnacle
 - c. Lightnet
 - d. Or approved equal.
- G. CL1EM Light Fixture: Surface Mount LED Linear Downlight with EM battery
- 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Focal Point
 - b. Pinnacle



- c. Lightnet
 - d. Or approved equal.
- H. CL2 Light Fixture: Recessed LED vandal resistant troffer
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Kurtzon
 - b. LC Doane
 - c. Luminaire LED Lighting
 - d. Or approved equal.
- I. CL2EM Light Fixture: Recessed LED vandal resistant troffer with EM battery
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Kurtzon
 - b. LC Doane
 - c. Luminaire LED Lighting
 - d. Or approved equal.

2.2 LUMINAIRE REQUIREMENTS

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. NRTL Compliance: Luminaires for hazardous locations will be listed and labeled for indicated class and division of hazard by an NRTL.
- C. FM Global Compliance: Luminaires for hazardous locations will be listed and labeled for indicated class and division of hazard by FM Global.
- D. Recessed Fixtures: Comply with NEMA LE 4.
- E. Bulb shape complying with ANSI C79.1.
- F. Lamp base complying with ANSI C81.61
- G. Lamps dimmable from 100 percent to 0 percent of maximum light output.
- H. Internal driver.



- I. Integral junction box with conduit fittings.

2.3 MATERIALS

A. Metal Parts:

- 1. Free of burrs and sharp corners and edges.
- 2. Sheet metal components will be steel unless otherwise indicated.
- 3. Form and support to prevent warping and sagging.

- ### B. Doors, Frames, and Other Internal Access:
- Smooth operating, free of light leakage under operating conditions, and designed to permit relamping without use of tools. Designed to prevent doors, frames, lenses, diffusers, and other components from falling accidentally during relamping and when secured in operating position.

C. Diffusers and Globes:

- 1. Acrylic Diffusers: One hundred percent virgin acrylic plastic, with high resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
- 2. Glass: Annealed crystal glass unless otherwise indicated.
- 3. Lens Thickness: At least 0.125 inch (3.175 mm) minimum unless otherwise indicated.

D. Housings:

- 1. Extruded-aluminum housing and heat sink.
- 2. Finish as indicated

- ### E. Factory-Applied Labels:
- Comply with UL 1598. Include recommended lamps. Locate labels where they will be readily visible to service personnel, but not seen from normal viewing angles when lamps are in place.

- 1. Label will include the following lamp characteristics:
 - a. "USE ONLY" and include specific lamp type.
 - b. Lamp diameter, shape, size, wattage, and coating.
 - c. CCT and CRI for all luminaires.

2.4 METAL FINISHES

- ### A. Variations in finishes are unacceptable in the same piece. Variations in finishes of adjoining components are acceptable if they are within the range of approved Samples and if they can be and are assembled or installed to minimize contrast.

2.5 LUMINAIRE FIXTURE SUPPORT COMPONENTS

- ### A. Comply with requirements in Section 260529 "Hangers and Supports for Electrical Systems" for channel and angle iron supports and nonmetallic channel and angle supports.



- B. Single-Stem Hangers: 1/2-inch (13-mm) steel tubing with swivel ball fittings and ceiling canopy. Finish same as luminaire.
- C. Wires: ASTM A 641/A 641 M, Class 3, soft temper, zinc-coated steel, 12 gage (2.68 mm)
- D. Rod Hangers: 3/16-inch (5-mm) minimum diameter, cadmium-plated, threaded steel rod.
- E. Hook Hangers: Integrated assembly matched to luminaire, line voltage, and equipment with threaded attachment, cord, and locking-type plug.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for luminaire to verify actual locations of luminaire and electrical connections before fixture installation. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 TEMPORARY LIGHTING

- A. If approved by the Commissioner, use selected permanent luminaires for temporary lighting. When construction is sufficiently complete, clean luminaires used for temporary lighting and install new lamps.

3.4 INSTALLATION

- A. Comply with NECA 1.
- B. Install luminaires level, plumb, and square with ceilings and walls unless otherwise indicated.
- C. Install lamps in each luminaire.
- D. Supports:
 - 1. Sized and rated for luminaire weight.
 - 2. Able to maintain luminaire position after cleaning and relamping.
 - 3. Provide support for luminaire without causing deflection of ceiling or wall.
 - 4. Luminaire mounting devices will be capable of supporting a horizontal force of 100 percent of luminaire weight and vertical force of 400 percent of luminaire weight.



E. Flush-Mounted Luminaire Support:

1. Secured to outlet box.
2. Attached to ceiling structural members at four points equally spaced around circumference of luminaire.
3. Trim ring flush with finished surface.

F. Wall-Mounted Luminaire Support:

1. Attached using through bolts and backing plates on either side of wall.
2. Do not attach luminaires directly to gypsum board.

G. Ceiling-Grid-Mounted Luminaires:

1. Secure to any required outlet box.
2. Secure luminaire to the luminaire opening using approved fasteners in a minimum of four locations, spaced near corners of luminaire.
3. Use approved devices and support components to connect luminaire to ceiling grid and building structure in a minimum of four locations, spaced near corners of luminaire.

H. Comply with requirements in Section 260519 "Low-Voltage Electrical Power Conductors and Cables" for wiring connections.

3.5 IDENTIFICATION

- A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 260553 "Identification for Electrical Systems."

3.6 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Operational Test: After installing luminaires, switches, and accessories, and after electrical circuitry has been energized, test units to confirm proper operation.
2. Test for Emergency Lighting: Interrupt power supply to demonstrate proper operation. Verify transfer from normal power to battery power and retransfer to normal.

B. Luminaire will be considered defective if it does not pass operation tests and inspections.

C. Prepare test and inspection reports.

3.7 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting the direction of aim of luminaires to suit occupied conditions. Make up to two



visits to Project during other-than-normal hours for this purpose. Some of this work may be required during hours of darkness.

1. During adjustment visits, inspect all luminaires. Replace lamps or luminaires that are defective.
2. Parts and supplies will be manufacturer's authorized replacement parts and supplies.
3. Adjust the aim of luminaires in the presence of the Commissioner.

END OF SECTION 265119



SECTION 284613 – FIRE-ALARM SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum and (5) the Contract (City of New York Standard Construction Contract).

1.2 SUMMARY

- A. Section Includes:
 - 1. Fire-alarm notification appliances.
 - 2. Fire-alarm addressable interface devices.
- B. Related Requirements:
 - 1. Section 260519, "Low-Voltage Electrical Power Conductors and Cables"

1.3 DEFINITIONS

- A. DACT: Digital alarm communicator transmitter.
- B. EMT: Electrical metallic tubing.
- C. FACU: Fire-alarm control unit.
- D. Mode: The terms "Active Mode," "Off Mode," and "Standby Mode" are used as defined in the 2007 Energy Independence and Security Act (EISA).
- E. Voltage Class: For specified circuits and equipment, voltage classes are defined as follows:
 - 1. Control Voltage: Listed and labeled for use in remote-control, signaling, and power-limited circuits supplied by a Class 2 or Class 3 power supply having rated output not greater than 150 V and 5 A, allowing use of alternate wiring methods complying with NFPA 70, Article 725.
 - 2. Low Voltage: Listed and labeled for use in circuits supplied by a Class 1 or other power supply having rated output not greater than 1000 V, requiring use of wiring methods complying with NFPA 70, Article 300, Part I.

1.4 SEQUENCING AND SCHEDULING

- A. Existing Fire-Alarm Equipment: Maintain existing equipment fully operational until new equipment has been tested and accepted. When new equipment is installed, label it "NOT IN SERVICE" until it is accepted. Remove labels from new equipment when put into service, and label existing fire-alarm equipment "NOT IN SERVICE" until removed from the building.



- B. Equipment Removal: After acceptance of new fire-alarm system, remove existing disconnected fire-alarm equipment and wiring.

1.5 SUBMITTAL PROCEDURES

- A. Refer to DDC General Conditions Section 013300 "Submittal Procedures".

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product, including furnished options and accessories.
 - 1. Include construction details, material descriptions, dimensions, profiles, and finishes.
 - 2. Include rated capacities, operating characteristics, and electrical characteristics.
- B. Shop Drawings: For fire-alarm system.
 - 1. Comply with recommendations and requirements in the "Documentation" section of the "Fundamentals" chapter in NFPA 72.
 - 2. Include plans, elevations, sections, and details, including details of attachments to other Work.
 - 3. Include details of equipment assemblies. Indicate dimensions, weights, loads, required clearances, method of field assembly, components, and locations. Indicate conductor sizes, indicate termination locations and requirements, and distinguish between factory and field wiring.
 - 4. Graphic Annunciator panel details.
 - 5. Detail assembly and support requirements.
 - 6. Include voltage drop calculations for notification-appliance circuits.
 - 7. Include input/output matrix.
 - 8. Include written statement from manufacturer that equipment and components have been tested as a system and comply with requirements in this Section and in NFPA 72.
 - 9. Include performance parameters and installation details for each detector.

1.7 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For fire-alarm systems and components to include in emergency, operation, and maintenance manuals.
 - 1. In addition closeout requirements as required by DDC General Conditions, include the following and deliver copies to the NYC Department of Buildings:
 - a. Comply with "Records" section of "Inspection, Testing and Maintenance" chapter in NFPA 72.
 - b. Provide "Fire-Alarm and Emergency Communications System Record of Completion Documents" in accordance with "Completion Documents" Article in "Documentation" section of "Fundamentals" chapter in NFPA 72.
 - c. Complete wiring diagrams showing connections between devices and equipment. Each conductor must be numbered at every junction point with indication of origination and termination points.
 - d. Riser diagram.



- e. Device addresses.
- f. Air-sampling system sample port locations and modeling program report showing layout meets performance criteria.
- g. Record copy of site-specific software.
- h. Provide "Inspection and Testing Form" in accordance with "Inspection, Testing and Maintenance" chapter in NFPA 72, and include the following:
 - 1) Equipment tested.
 - 2) Frequency of testing of installed components.
 - 3) Frequency of inspection of installed components.
 - 4) Requirements and recommendations related to results of maintenance.
 - 5) Manufacturer's user instructing manuals.
- i. Manufacturer's required maintenance related to system warranty requirements.
- j. Abbreviated operating instructions for mounting at FACU and each annunciator unit.

B. Software and Firmware Operational Documentation:

- 1. Software operating and upgrade manuals.
- 2. Program Software Backup: On USB media and approved online or cloud solution.
- 3. Device address list.
- 4. Printout of software application and graphic screens.

1.8 QUALITY ASSURANCE

- A. Refer to DDC General Conditions Section 014000 "Quality Requirements."
- B. Installer Qualifications: Installer's personnel must be trained and certified by the manufacturer for installation of units required for this Project.

1.9 WARRANTY

- A. Special Warranty: The manufacturer agrees to repair or replace fire-alarm system equipment and components that fail because of defects in materials or workmanship within the specified warranty period.
 - 1. Warranty Period: Five years from the date of Substantial Completion.

PART 2 - PRODUCTS

2.1 FIRE-ALARM SYSTEM

- A. Existing System: United Technologies Corporation, no substitutions.

2.2 ADDRESSABLE FIRE-ALARM SYSTEM

- A. Description:
 - 1. Noncoded, UL-certified addressable system, with multiplexed signal transmission



and horn-and-strobe notification for evacuation.

B. Performance Criteria:

1. Regulatory Requirements:

- a Fire-Alarm Components, Devices, and Accessories: Listed and labeled by a NRTL in accordance with NFPA 70 for use with selected fire-alarm system and marked for intended location and application.

2. General Characteristics:

- a Automatic sensitivity control of certain smoke detectors.
- b Fire-alarm signal initiation must be by one or more of the following devices
 - 1) Manual stations.
 - 2) Smoke detectors.
- c Fire-alarm signal must initiate the following actions:
 - 1) Continuously operate alarm notification appliances
 - 2) Identify the alarm and specific initiating device at FACU
 - 3) Transmit alarm signal to remote alarm receiving station.
 - 4) Unlock electric door locks in designated egress paths.
 - 5) Release fire and smoke doors held open by magnetic door holders.
 - 6) Close smoke dampers in air ducts of designated air-conditioning duct systems.
 - 7) Recall elevators to primary or alternate recall floors.
 - 8) Activate elevator power shunt trip.
 - 9) Activate emergency lighting control.
 - 10) Activate emergency shutoffs for gas and fuel supplies.
 - 11) Record events in system memory.
 - 12) Record events by system printer.
 - 13) Indicate device in alarm on graphic annunciator.
- d Supervisory signal initiation must be by one or more of the following devices and actions:
 - 1) FACU has lost communication with network.
- e System trouble signal initiation must be by one or more of the following devices and actions:
 - 1) Open circuits, shorts, and grounds in designated circuits.
 - 2) Opening, tampering with, or removing alarm-initiating and supervisory signal-initiating devices.
 - 3) Loss of communication with addressable sensor, input module, relay, control module, remote annunciator, printer interface, or Ethernet module.
 - 4) Loss of primary power at FACU.
 - 5) Ground or single break in internal circuits of FACU.



- 6) Abnormal AC voltage at FACU.
- 7) Break in standby battery circuitry.
- 8) Failure of battery charging.
- 9) Abnormal position of switch at FACU
- 10) Annunciator.

f System Supervisory Signal Actions:

- 1) Initiate notification appliances.
- 2) Identify specific device initiating event at FACU
- 3) Record event on system printer.
- 4) After time delay of 200 seconds, transmit trouble or supervisory signal to remote alarm receiving station.
- 5) Transmit system status to building management system.
- 6) Display system status on graphic annunciator.

g Network Communications:

- 1) Provide network communications for fire-alarm system in accordance with fire-alarm manufacturer's written instructions.
- 2) Provide network communications pathway per manufacturer's written instructions and requirements in NFPA 72 and NFPA 70.
- 3) Provide integration gateway using BACnet for connection to building automation system.

2.3 FIRE-ALARM NOTIFICATION APPLIANCES

A. Fire-Alarm Audible Notification Appliances:

1. Description: Horns, bells, or other notification devices that cannot output voice messages.
2. Performance Criteria:
 - a Regulatory Requirements:
 - 1) NFPA 72
 - b General Characteristics:
 - 1) Individually addressed, connected to signaling-line circuit, equipped for mounting as indicated, and with screw terminals for system connections.
 - 2) Connected to notification-appliance signal circuits, zoned as indicated, equipped for mounting as indicated, and with screw terminals for system connections.
 - 3) ISO Temporal 3 Evacuation Tone: 90 plus or minus 4 dB(A-weighted) at 24 V.
 - 4) Combination Devices: Factory-integrated audible and visible devices in single-mounting assembly, equipped for mounting as indicated and with screw terminals for system connections.



B. Fire-Alarm Visible Notification Appliances:

1. Performance Criteria:

a. Regulatory Requirements:

- 1) NFPA 72
- 2) UL 1971.

b. General Characteristics:

- 1) Rated Light Output:
 - a) 15/30/75/110 cd, selectable in the field.
- 2) Clear or nominal white polycarbonate lens mounted on the aluminum faceplate.
- 3) Mounting: Wall mounted unless otherwise indicated.
- 4) Flashing must be in a temporal pattern, synchronized with other units.
- 5) Strobe Leads: Factory connected to screw terminals.
- 6) Mounting Faceplate: Factory finished, red.

PART 3 - EXECUTION

3.1 EXECUTION REQUIREMENTS

- A. Refer to DDC General Conditions for execution requirements.

3.2 EXAMINATION

- A. Examine areas and conditions for compliance with requirements for ventilation, temperature, humidity, and other conditions affecting performance of the Work.

1. Verify that manufacturer's written instructions for environmental conditions have been permanently established in spaces where equipment and wiring are installed, before installation begins.

- B. Examine roughing-in for electrical connections to verify actual locations of connections before installation.

- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.3 PREPARATION

- A. Preinstallation Testing: Perform verification of functionality of installed components of existing system prior to starting work. Document equipment or components not functioning as designed.

- B. Interruption of Existing Fire-Alarm Service: Do not interrupt fire-alarm service to facilities occupied by City of New York or others unless permitted under the following conditions and then only after arranging to provide temporary guard service in accordance with the requirements indicated:



1. Notify Commissioner no fewer than seven days in advance of proposed interruption of fire-alarm service.
 2. Do not proceed with interruption of fire-alarm service without Commissioner's written permission.
- C. Protection of In-Place Conditions: Protect devices during construction unless devices are placed in service to protect facility during construction.

3.4 INSTALLATION OF EQUIPMENT

- A. Comply with NECA 305, NFPA 72, NFPA 101, and requirements the NYC Building Code for installation and testing of fire-alarm equipment. Install electrical wiring to comply with requirements in NFPA 70 including, but not limited to, Article 760, "Fire Alarm Systems."
1. Devices placed in service before other trades have completed cleanup must be replaced.
 2. Devices installed, but not yet placed, in service must be protected from construction dust, debris, dirt, moisture, and damage in accordance with manufacturer's written storage instructions.
- B. Connecting to Existing Equipment: Verify that the existing fire-alarm system is operational before making changes or connections.
1. Connect new equipment to the existing control panel in existing part of building.
 2. Connect new equipment to existing monitoring equipment at supervising station.
 3. Expand, modify, and supplement existing monitoring equipment as necessary to extend existing monitoring functions to new points. New components must be capable of merging with existing configuration without degrading performance of either system.
- C. Remote Status and Alarm Indicators: Install in visible location near each smoke detector, switch that is not readily visible from normal viewing position.
- D. Audible Alarm-Indicating Devices: Install not less than 6 inch below ceiling. Install bells and horns on flush-mounted back boxes with device-operating mechanism concealed behind grille. Install devices at same height unless otherwise indicated.
- E. Visible Alarm-Indicating Devices: Install adjacent to each alarm bell or alarm horn and at least 6 inch below ceiling. Install devices at same height unless otherwise indicated.

3.5 ELECTRICAL CONNECTIONS

- A. Connect wiring in accordance with Section 260519 "Low-Voltage Electrical Power Conductors and Cables."
- B. Ground equipment in accordance with Section 260526 "Grounding and Bonding for Electrical Systems."
- C. Install electrical devices furnished by manufacturer, but not factory mounted, in accordance with NFPA 70 and NECA 1.



- D. Install nameplate for each electrical connection, indicating electrical equipment designation and circuit number feeding connection.
 - 1. Nameplate must be laminated acrylic or melamine plastic signs, as specified in Section 260553 "Identification for Electrical Systems."
 - 2. Nameplate must be laminated acrylic or melamine plastic signs with black background and engraved white letters at least 1/2 inch high.

3.6 CONTROL CONNECTIONS

- A. Install control and electrical power wiring to field-mounted control devices.
- B. Connect control wiring in accordance with Section 26 05 19 Low-Voltage Electrical Power Conductors and Cables.
- C. Install a nameplate for each control connection, indicating field control panel designation and I/O control designation feeding connection.

3.7 PATHWAYS

- A. Pathways above recessed ceilings and in inaccessible locations may be routed exposed.
 - 1. Exposed pathways located less than 96 inches above the floor must be installed in EMT.
- B. Pathways must be installed in EMT.
- C. Exposed EMT must be painted red enamel.

3.8 IDENTIFICATION

- A. Identify system components, wiring, cabling, and terminals. Comply with requirements for identification specified in Section 26 05 53 "Identification for Electrical Systems."

3.9 GUARANTEE SERVICE

- A. Guarantee Service: Beginning at Substantial Completion, guarantee service must include 12 months' full maintenance by manufacturer-trained installers. Include preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper operation. Parts and supplies must be manufacturer's authorized replacement parts and supplies.
 - 1. Include visual inspections in accordance with the "Visual Inspection Frequencies" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
 - 2. Perform tests in the "Test Methods" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.
 - 3. Perform tests per the "Testing Frequencies" table in the "Testing" paragraph of the "Inspection, Testing and Maintenance" chapter in NFPA 72.

3.10 SOFTWARE SERVICE AGREEMENT



- A. Comply with UL 864.
- B. Technical Support: Beginning at Substantial Completion, the service agreement must include software support for one year.
- C. Upgrade Service: At Substantial Completion, update software to the latest version. Install and program software upgrades that become available within one year from the date of Substantial Completion. Upgrading software must include operating system and new or revised licenses for using software.
 - 1. Upgrade Notice: At least 30 days to allow City of New York to schedule access to system and to upgrade computer equipment if necessary.

END OF SECTION 284613

THIS PAGE INTENTIONALLY LEFT BLANK

FMS ID: CO283TOIL



Department of Design and Construction

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION WORK

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

LOCATION: 100 Centre Street
BOROUGH: Manhattan, NY 10013
CITY OF NEW YORK

Contractor

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated _____, 20____



THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

May 16, 2024

ADDENDUM No. # 1

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

- 1. Bidders Questions and Responses to Questions:**
See Attachment A.
- 2. Revisions to Documents:**
See Attachment B.
- 3. Revisions to PASSPort forms:**
See Attachment C.

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section by email at CSB_projectinquiries@ddc.nyc.gov.

 Digitally signed by
Richard Jones, PE
CWI CDT

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

No.	Bidders Questions	DDC Responses
1	Drawing A-041- 4 th Floor Men's Public Restroom Plans, listed on the drawing index, is not included in the drawing set.	Please see revised drawing set dated 05-15-2024.

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

- A-041.00 4TH FLOOR MEN'S PUBLIC RESTROOM PLANS added to the drawings.

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum initiates Round 2 of the procurement.

Please note that numbering of addenda is independent of rounds.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

May 31, 2024

ADDENDUM No. # 2

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. **The Bid Opening for the contract described below scheduled for June 5, 2024, at 2:30 pm is rescheduled to June 19, 2024 at 2:30 pm.**

Contract #1 – General Construction Work

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section by email at CSB_projectinquiries@ddc.nyc.gov.

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum is included within Round 2 of the procurement.

Please note that numbering of addenda is independent of rounds.

Bid Opening Date Changes:

The Bid Opening scheduled for June 5, 2024 at 2:30pm is rescheduled for Jun 19, 2024 at 2:30pm.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 12, 2024

ADDENDUM No. # 3

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

- 1. The Bid Opening for the contract described below scheduled for June 19, 2024, at 2:30 pm is rescheduled to June 24, 2024 at 2:30 pm.**
Contract #1 – General Construction Work
- 2. Bidders Questions and Responses to Questions:**
See Attachment A.
- 3. Revisions to Documents:**
See Attachment B.
- 4. Revisions to PASSPort forms:**
See Attachment C.

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section by email at CSB_projectinquiries@ddc.nyc.gov.

Sarah Zomick for

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

No.	Bidders Questions	DDC Responses
1	Re: T-4 Printed Tile 24x24, Custom print, Graphics by Architect. Is this material being provided by the Owner or Architect? There is no manufacturer or vendor provided. Please furnish for pricing.	Refer to section 093000 Tiling, Article 2.2.B for manufacturers. Commissioner will provide the graphic art file to be printed on the tile after award. Please use a full color image as a sample for pricing.
2	Re: T-7 Printed Tile 24x24, Custom print, Graphics by Architect. Is this material being provided by Owner or Architect? There is no manufacturer or vendor provided. Please furnish for pricing.	Refer to section 093000 Tiling, Article 2.2.B for manufacturers. Commissioner will provide the graphic art file to be printed on the tile after award. Please use a full color image as a sample for pricing.
3	Please provide schedule "A" for this project.	Please see DDC Addendum to General Conditions in Volume 3 for this information.
4	Please provide the duration for this project	Please see DDC Addendum to General Conditions in Volume 3 for this information.
5	The lighting schedule is lacking model numbers. Please provide a model number to be able to provide the proper fixture containing the proper specifications.	Please see revised A-501, included with this Addendum, for more information on the schedule for lights.
6	Door hardware group 5 (A-005) does not indicate any item (TBD). Please provide this information.	The NYC Department of Correction will provide lockset and hardware for holding pens to match other holding pens in MCC.
7	Who is the Fire Alarm vendor for this building?	Please see revised FA-001, included with this Addendum, for this information.
8	Booklet Volume 3 pages are blank. Please advise.	All pages of Volume 3 are available in the PASSPort RFx. Please contact MOCS for technical assistance, if needed.
9	Please provide manufacturer's contact information for the plastic paneling scope of work.	Contractor to submit manufacturer for Commissioner's review to comply with performance specifications in section 066400 Plastic Paneling as written.
10	Toilet partitions are identified on the schedule as a Proprietary Item, but the manufacturer is not listed in the specification or on the Proprietary Items list. Please provide.	Toilet partitions are not proprietary. Please see revised A-004, included with this Addendum, for clarification.
11	Fire Alarm contact phone is the central station service, not the maintenance vendor for the system. Correct contact for Mr. Singh would be appreciated.	Please see revised FA-001, included with this Addendum, for this information.
12	Is the insurance- OCIP/CCIP (or) standard ?	OCIP does not apply.

13	Work hours- Regular/Overtime hours?	Off hours work may be required for this project, potentially for the demolition. Refer to Addendum to General Conditions in Volume 3 for building hours.
14	As per Drawing List, M-121 is not shown. M-112 is noted as the 11 th floor, but as per plan, it is the 12 th floor. Kindly share the updated drawing list. Also: is there a BIM & LEED requirement?	M-112 floor plan shows both Men's and Women's restrooms for the 12th floor. Refer to updated M-001, included with this Addendum, for clarification. BIM and LEED are not required for this project.
15	Do we have any Addenda issued for this job?	Yes, refer to the PASSPort RfX for this information.
16	Re: T-4, T-5 and T-7 Printed Tile. The tile supplier/ manufacturer will not quote custom printed tile without the graphics. Please provide the graphics for all printed tile types.	Please use a full color image as a sample for pricing.
17	Various suppliers and subcontractors have requested a due date extension. Please extend the due date.	The Bid Opening date has been postponed to June 24, 2024.
18	Specification section 265119 LED Interior Lighting states that the fixtures need EM Batteries. However, the drawings state that they connect to emergency systems. So, why would we need EM Batteries?	Lights will be connected to the emergency system; batteries are not required. Refer to updated A-501, included with this Addendum, for clarification.
19	Please provide an elevational view for stainless steel sink apron to ascertain the perforation types and spacing of the perforations.	Please see updated A-503, included with this Addendum, for clarification. Custom sink apron with perforated metal brushed stainless steel" are staggered centers, 3/32" round on 3/16" Stg. Centers.
20	Detail 1 on drawing A-500 states, "...Final Signage Design TBD by Architect." Drawing A-560 depicts signage. Please provide a signage schedule and specification for the signage scopes of work.	Signage schedule added to A-560, included with this Addendum.
21	The public bathrooms require brass benches to be wall mounted at various locations. However, the Metal Fabrication specification does not have any verbiage for the brass scopes of work. Please provide a specification containing the alloy number for the brass and dimensions for the perforations for the brass benches scopes of work.	Refer to specification section 057000, 2.1.F. for this information. Use alloy 280 for entire brass bench.
22	Please advise if 100 Centre Street is a landmark building and will require a Department of Buildings and a New York City Landmarks Preservation Commission work permits.	100 Centre Street is a Landmark Quality structure. This project requires work permits from the Department of Buildings, but not from the New York City Landmarks Preservation Commission.
23	As per specification section 096623 Article 2.1.A.2, MT-1190 is used for hallway & MT-8385 is used for bathrooms. However, as per A-021 finish plan, hallways have T-1 hatch as per A-003. Please confirm if hallways get T-9.	It will be Thin-Set Epoxy Terrazzo, MT-1190 (black) for hallway, and MT-8385 (white) inside bathroom. Detail 4, Restroom Plans, for all floors, has been updated. See Attachment B of Addendum for full list of drawings.
24	Please confirm the scope of terrazzo tile in walls is 1'-6" high at Partition 3 as per 3/A-066, and is limited to rooms HP-0301, HP-1201 and HP-1203 (in Holding pen rooms). Can we price for precast terrazzo in lieu of terrazzo tiles in these rooms?	Confirm that Partition 3 is 1'-6" high. However, it refers only to holding pens HP-0301 and HP-1201. Precast terrazzo is approved for wall cove base.

25	As per elevations, certain room elevation appear to have different heights of T-1 terrazzo wall base. Please confirm the base height to be followed is 6" high throughout.	T-1 terrazzo wall base always at 6" high.
26	Please clarify if all work can be completed simultaneously or if it will be phased.	Work will be phased. See updated A-001, included with this Addendum, for clarification.
27	The floors are to be sloped to drains 2% max. Is the terrazzo flooring to be sloped to floor drains, or would the terrazzo floor to follow slope of concrete?	The terrazzo flooring needs to be sloped towards the drain.
28	When is the project scheduled to happen?	Project is estimated to start in December 2024.
29	What is the tax & insurance status of the project?	Please refer to Volume 2 of the Standard Construction Contract – Chapter V-Article 22 for Insurance information and Chapter XI-Article 62 for Tax information.
30	As per the finish schedule A-004, the Terrazzo T-9 will include marble from existing partitions as the aggregate. Please advise how that material will be packaged and provided. Please also provide the total weight of material available to confirm that there is enough for the project and no additional aggregate will be required.	The existing marble partitions should be crushed and integrated as aggregate into T-9. There will not be enough for the entire aggregate in the terrazzo; additional aggregate will need to be used to match existing. Contractor to VIF material available from existing marble partitions.
31	For T-1 the Terrazzo cove base, please provide a base height as none is indicated in the specification.	T-1 is always 6" high.

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

Revisions to the Drawings:

- A-001: added phasing plan
- A-003: added Tile 9 pattern for hallway
- A-004: Removed Proprietary requirement for toilet partition. Specs remain unchanged.
- A-021: corrected Tile 9 pattern for hallway
- A-023: corrected Tile 9 pattern for hallway
- A-041: corrected Tile 9 pattern for hallway
- A-043: corrected Tile 9 pattern for hallway
- A-101: corrected Tile 9 pattern for hallway
- A-102: reprinted to add drawing titles
- A-103: reprinted to add drawing titles
- A-111: corrected Tile 9 pattern for hallway
- A-113: corrected Tile 9 pattern for hallway
- A-131: corrected Tile 9 pattern for hallway
- A-133: corrected Tile 9 pattern for hallway
- A-151: corrected Tile 9 pattern for hallway
- A-153: corrected Tile 9 pattern for hallway
- A-161: corrected Tile 9 pattern for hallway
- A-163: corrected Tile 9 pattern for hallway
- A-500:
 - Detail 1: Added clarification for the 1/4" Powder Coated Steel Sign regarding its graphics and schedule.
 - Detail 2: Added Alloy requirement for the Brass Bench
- A-501:
 - Detail 5: Added Alloy requirement for the Brass Bench as well as Perforation requirements.
 - Added Lighting Fixture Schedule
- A-503:
 - Detail 1: Added Perforation Requirements for the Steel Apron
- A-560:
 - Detail 1: Added the Three options for hallway sign
 - Details 2, 3, 4, 5, 8, 9: Added dimensions to the signs
 - Detail 11: Added schedule for the signs
- FA-001: Clarified Fire Alarm Vendor information
- M-001: Clarified mechanical drawing list and special inspection requirements.

Revisions to Volume 3:

- Addendum to General Conditions: updated Schedule C Drawing List

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum initiates Round 3 of the procurement.

Please note that numbering of addenda is independent of rounds.

Bid Opening Date Changes:

The Bid Opening scheduled for June 19, 2024 at 2:30pm is rescheduled for June 24, 2024 at 2:30pm.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 21, 2024

ADDENDUM No. # 4

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

- 1. The Bid Opening for the contract described below scheduled for July 8, 2024, at 2:30 pm is rescheduled to July 8, 2024 at 2:30 pm.**
Contract #1 – General Construction Work
- 2. Bidders Questions and Responses to Questions:**
See Attachment A. (Not Used)
- 3. Revisions to Documents:**
See Attachment B. (Not Used)
- 4. Revisions to PASSPort forms:**
See Attachment C.

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section by email at CSB_projectinquiries@ddc.nyc.gov.

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum is included within Round 3 of the procurement.

Please note that numbering of addenda is independent of rounds.

Bid Opening Date Changes:

The Bid Opening scheduled for June 24, 2024 at 2:30pm is rescheduled for July 8, 2024 at 2:30pm.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 24, 2024

ADDENDUM No. # 5

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

- 1. Bidders Questions and Responses to Questions:**
See Attachment A.
- 2. Revisions to Documents:**
See Attachment B.
- 3. Revisions to PASSPort forms:**
See Attachment C.

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section by email at CSB_projectinquiries@ddc.nyc.gov.

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

No.	Bidders Questions	DDC Responses
1	Certain plans call out for re-use of existing stone partitions as aggregate for terrazzo flooring. Can you please send us pictures of this?	These are the original marble partitions in the restrooms. 1-A111 and other floorplans will show these.
2	Re: Division 6 Spec Section 06 64 00 Plastic Paneling. Are we using this section? I don't see it on the finish schedule, or on any elevations. Where is this work?	This section has been removed, no plastic paneling work. Refer to updated Volume 3, included with this Addendum, for clarification.
3	Drawing A-041 shows an equipment symbol E14, but is not identified on the schedule. Please clarify.	E14 has been removed from A-041. Element not in use. Refer to updated A-041, included with this Addendum.
4	Drawing P-021 indicates to provide electronic trap primers. However, Drawing P-101 calls for trap seal devices. Please advise which is correct.	Electronic trap seals must be provided. Refer to updated P-101, included with this Addendum.
5	06 64 00 Plastic Paneling- Please advise where this is shown on the contract drawings.	This section has been removed, no plastic paneling work. Refer to updated Volume 3, included with this Addendum, for clarification.
6	Please provide a signage specification.	Signs are custom fabricated. See 1/A-500, and details 1,2,3,4,5,8,9,10 on A-560. See Material in Sign Schedule, detail 11 - A-560, for this information.
7	Please provide a fluted metal panel specification.	Refer to M-5 on Drawing A-004, updated with this Addendum.
8	Door schedule Drawing A-005 includes designated door finishes S-10 and S-11. Per Drawing A-004, S-10 and S-11 are Corian Solid Surface. However, per the door schedule, the doors are metal. Please clarify.	S-10 and S-11 are metal doors with a Corian Solid Surface Clad Finish (or approved equal).

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

Revisions to the Drawings:

- A-004:
 - Clarified Specification of the Decorative Corrugated Metal M-5.
- A-041:
 - Removed E-14 item that is not in use anymore.
- A-560:
 - Clarified Specification of Signage: Added material in the Signage Schedule
- P-101:
 - Updated to correctly show type of trap required.

Revisions to Volume 3:

- Table of Contents: updated to remove Division 6 Section 06 64 00 Plastic Paneling
- Division 6 Section 06 64 00 Plastic Paneling removed from the technical specification set

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum initiates Round 4 of the procurement.

Please note that numbering of addenda is independent of rounds.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

July 1, 2024

ADDENDUM No. # 6

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

**Manhattan Criminal Court Public Restrooms Renovation and Holding
Cells Accessibility Upgrade**

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

- 1. Bidders Questions and Responses to Questions:**
See Attachment A.
- 2. Revisions to Documents:**
See Attachment B.
- 3. Revisions to PASSPort forms:**
See Attachment C.

Transferring Data Between Rounds of an RFX: A new document titled “Transferring Data Between Rounds of an RFX” has been added to the Documents section of the View RFX tab. Please refer to this document when an addendum has been issued. Note: Whenever an addendum is issued, the RFX item grid will be cleared. You can import the work you have already done by following the steps on this document.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section via PASSPort (in the Discussions with Buyer section).

Sarah Zomick for

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

No.	Bidders Questions	DDC Responses
1	We can't find the vendor for the steel doors with the Corian cladding for all openings. Please advise. Also provide the recommended manufacturer for the toilet partitions.	The Steel doors with Corian Cladding are custom made. Toilet Partitions are described in Section 10 21 13 of the Specifications; manufacturer not mentioned as it's by Contractor.
2	I looked through the shared project files including addendum 4 and could not find the hardware specifications, only the hardware schedule on A-005. Please clarify.	Specification Section 08 71 00 Finish Hardware has been added to Volume 3. Also refer to Hardware requirements on A-005.

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

Revisions to Volume 1

- Updated information for Pre Bid Questions to be submitted via PASSPort rather than by email.

Revisions to Volume 2

- Prevailing Wages dated July 1, 2024 are now included.

Revisions to Volume 3:

- Table of Contents:
 - updated new section 087100 Finish Hardware
- Division 8 Section 087100 Finish Hardware has been added to the technical specification set.

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum initiates Round 5 of the procurement.

Please note that numbering of addenda is independent of rounds.

Questionnaire Changes:

None

Item Grid Changes:

None

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

July 3, 2024

ADDENDUM No. # 7

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

EPIN: 85024B0059– CO283TOIL

Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. **The Bid Opening for the contract described below scheduled for July 8, 2024, at 2:30 pm is rescheduled to July 15, 2024 at 2:30 pm.**
Contract #1 – General Construction Work
2. **Bidders Questions and Responses to Questions:**
See Attachment A. (Not Used)
3. **Revisions to Documents:**
See Attachment B. (Not Used)
4. **Revisions to PASSPort forms:**
See Attachment C.

DDC strongly advises vendors to finalize and submit bids 48 hours prior to due date and time. The City is not responsible for technical issues (e.g. internet connection, power outages, technology malfunction, computer errors, etc.) related to bid submissions.

If additional information is required, please contact the Department of Design and Construction, Contract Section via PASSPort (in the Discussions with Buyer section).

Sarah Zomick for

Richard Jones, PE CWI CDT
Chief Engineer

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells
Accessibility Upgrade*

ATTACHMENT B – REVISIONS TO THE DOCUMENTS

NOT USED

DDC PROJECT #: CO283TOIL

PROJECT NAME: *Manhattan Criminal Court Public Restrooms Renovation and Holding Cells Accessibility Upgrade*

ATTACHMENT C – REVISIONS TO PASSPORT FORMS

This Addendum is included within Round 5 of the procurement.

Please note that numbering of addenda is independent of rounds.

Bid Opening Date Changes:

The Bid Opening scheduled for July 8, 2024 at 2:30pm is rescheduled for July 15, 2024 at 2:30pm.

Questionnaire Changes:

None

Item Grid Changes:

None