



PROJECT ID: PVC341-M

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE  
LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000  
WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

**LAW**

VOLUME 1 OF 3

# BID BOOKLET

FOR FURNISHING ALL LABOR AND MATERIALS  
NECESSARY AND REQUIRED FOR:

## Historic Richmond Town Utilities Upgrade

LOCATION:  
BOROUGH:  
CITY OF NEW YORK

441 Clarke Avenue  
Staten Island 10306

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

Dept of Cultural Affairs

Stantec Consulting Services, Inc.



Date:

June 9, 2014

14-123



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

DR. FENIOSKY A. PEÑA-MORA  
Commissioner

JOHN GODDARD  
Agency Chief  
Contracting Officer

February 06, 2015

CERTIFIED MAIL - RETURN RECEIPT REQUEST

JR Cruz Corp.  
675 Line Rd  
Aberdeen, NJ 07747

RE: FMS ID: PVC341-M  
E-PIN: 85014B0165001  
DDC PIN: 8502014PV0026C  
Historic Richmond Town Utilities Upgrade -  
Borough Of Staten Island  
**NOTICE OF AWARD**

Dear Contractor:

You are hereby awarded the above referenced contract based upon your bid in the amount of \$8,281,927.00 submitted at the bid opening on September 16, 2014. Within ten (10) days of your receipt of this notice of award, you are required to take the actions set forth in Paragraphs (1) through (3) below. For your convenience, attached please find a copy of Schedule A of the General Conditions to the Contract, which sets forth the types and amounts of insurance coverage required for this contract.


- (1) Execute four copies of the Agreement in the Contracts Unit, 30-30 Thomson Avenue, 1<sup>st</sup> Floor, Long Island City, New York (IDCNY Building). A Commissioner of Deeds will be available to witness and notarize your signature. The Agreement must be signed by an officer of the corporation or a partner of the firm.
- (2) Submit to the Contracts Unit four properly executed performance and payment bonds. If required for this contract, copies of performance and payment bonds are attached.
- (3) Submit to the Contracts Unit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by New York State Law. The insurance documentation specified in this paragraph is required for registration of the contract with the Comptroller's Office.



On or before the contract commencement date, you are required to submit all other certificates of insurance and/or policies in the types and amounts required by Schedule A. Such certificates of Insurance and/or policies must be submitted to the Agency Chief Contracting Office, Attention: Risk Manager, Fourth Floor at the above indicated department address.

Your attention is directed to the section of the Information for Bidders entitled "Failure to Execute Contract". As indicated in this section, in the event you fail to execute the contract and furnish the required bonds within the (10) days of your receipt of this notice of award, your bid security will be retained by the City and you will be liable for the difference between your bid price and the price for which the contract is subsequently awarded, less the amount of the bid security retained.

Sincerely,

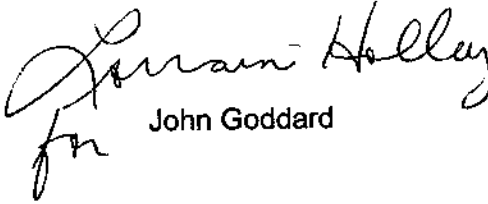  
John Goddard

**BID FORM**  
**THE CITY OF NEW YORK**  
**DEPARTMENT OF DESIGN AND CONSTRUCTION**  
**DIVISION OF PUBLIC BUILDINGS**

**BID FOR FURNISHING ALL LABOR AND  
MATERIAL NECESSARY AND REQUIRED FOR:**

**PROJECT ID: PVC341-M**

**Historic Richmond Town Utilities Upgrade  
441 Clarke Avenue  
Staten Island 10306**

Name of Bidder: JRCRUZ Corp.

Date of Bid Opening: September 11, 2014

Bidder is: (Check one, whichever applies) Individual ( ) Partnership ( ) Corporation (x)

Place of Business of Bidder: 6775 Line Road, Aberdeen, NJ 07747

Bidder's Telephone Number: 732-290-0700 Bidder's Fax Number: 732-290-8960

Bidder's Email Address: engineering@jrcruz.com

Residence of Bidder (If Individual): \_\_\_\_\_

If Bidder is a Partnership, fill in the following blanks:

Names of Partners

Residence of Partners


If Bidder is a Corporation, fill in the following blanks:

Organized under the laws of the State of New York

Name and Home Address of President: Evaristo Cruz, Jr.  
74 Hickory Lane, Lincroft, NJ 07728

Name and Home Address of Secretary: Matthew J. Cruz  
74 Hickory Lane, Lincroft, NJ 07738

Name and Home Address of Treasurer: Same as president

**THIS PAGE INTENTIONALLY LEFT BLANK**

**BID FORM**

**PROJECT ID: PVC341-M**

A. **TOTAL BID PRICE** - Total price for all labor and material for all required work. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

In the space provided below, the Bidder shall indicate its Total Bid Price in figures. Such Total Bid Price is set forth on page 21-23 of the Bid Schedule.

**TOTAL BID PRICE**  
**( a/k/a BID PROPOSAL)**

\$ 8,803,400

**BIDDER'S SIGNATURE AND AFFIDAVIT**

\* **SUBCONTRACTOR IDENTIFICATION:** You MUST complete and submit the form entitled "Bidder's Identification of Subcontractors" (page 17) at the time you submit your bid. You must submit this form in a separate, sealed envelope (**BID ENVELOPE #2**). In the event an award of contract is not made to the Bidder, the Bidder hereby authorizes the Agency to shred the form entitled "Bidder's Identification of Subcontractors".  Yes  No

Bidder: JRCRUZ Corp

By: [Signature]  
Evaristo Cruz, Jr., President (Signature of Partner or corporate officer)

Attest: [Signature] Matthew J. Cruz Secretary of Corporate Bidder  
(Corporate Seal)

Affidavit on the following page should be subscribed and sworn to before a Notary Public

**THIS PAGE INTENTIONALLY LEFT BLANK**

BID FORM (TO BE NOTARIZED)

\*\*\*\*\*

AFFIDAVIT WHERE BIDDERS IS AN INDIVIDUAL

STATE OF NEW YORK, COUNTY OF \_\_\_\_\_ ss:
being duly sworn says:
I am the person described in and who executed the foregoing bid, and the several matters therein stated are in all respects true.

(Signature of the person who signed the Bid)

Subscribed and sworn to before me this
day of \_\_\_\_\_

Notary Public

\*\*\*\*\*

AFFIDAVIT WHERE BIDDERS IS A PARTNERSHIP

STATE OF NEW YORK, COUNTY OF \_\_\_\_\_ ss:
being duly sworn says:
I am a member of \_\_\_\_\_ the firm described in and which executed the foregoing bid.
subscribed the name of the firm thereto on behalf of the firm, and the several matters therein stated are in all respects true.

(Signature of Partner who signed the Bid)

Subscribed and sworn to before me this
day of \_\_\_\_\_

Notary Public

\*\*\*\*\*

AFFIDAVIT WHERE BIDDERS IS A CORPORATION


STATE OF NEW JERSEY, COUNTY OF MONMOUTH ss:
Evaristo Cruz, Jr. being duly sworn says:
I am the President of the above named corporation whose name is subscribed to and which executed
the foregoing bid. I reside at 74 Hickory Lane, Lincroft, NJ 07738
I have knowledge of the several matters therein stated, and they are in all respects true.

(Signature of Corporate Officer who signed the Bid)

Subscribed and sworn to before me this
11th day of September 2014

[Handwritten signature of Rosie Catao]

Notary Public





### AFFIRMATION

The undersigned bidder affirms and declares that said bidder is not in arrears to the City of New York upon debt, contract or taxes and is not a defaulter, as surety or otherwise, upon obligation to the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except NONE

(If none, the bidder shall insert the word "None" in the space provided above.)

Full Name of Bidder: JRCRUZ Corp.

Address: 675 Line Road

City: Aberdeen

State: New Jersey

Zip Code: 07728

CHECK ONE BOX AND INCLUDE APPROPRIATE NUMBER:

A - Individual or Sole Proprietorship \*  
SOCIAL SECURITY NUMBER

B - Partnership, Joint Venture or other unincorporated organization  
EMPLOYER IDENTIFICATION NUMBER

C - Corporation  
EMPLOYER IDENTIFICATION NUMBER

22-3373796

By: \_\_\_\_\_

Signature: 

Title: Evaristo Cruz, Jr., President

If a corporation, place seal here

This affirmation must be signed by an officer or duly authorized representative.

\* Under the Federal Privacy Act the furnishing of Social Security Numbers by bidders on City contracts is voluntary. Failure to provide a Social Security Number will not result in a bidder's disqualification. Social Security Numbers will be used to identify bidders, proposers or vendors to ensure their compliance with laws, to assist the City in enforcement of laws, as well as to provide the City a means of identifying of businesses which seek City contracts.

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

NO.	DESCRIPTION	QTY	UNIT	EST. PRICE	TOTAL
001	4.01 RAG ASPHALT MACADAM PAVEMENT, 6" THICK	4,500	S.Y.	36	162,000
002	4.02 AG ASPHALTIC CONCRETE WEARING COURSE, 3" THICK	200	S.Y.	28	5,600
003	4.02 CB ASPHALTIC CONCRETE MIXTURE	50	TONS	100	5,000
004	4.04 B CONCRETE BASE FOR PAVEMENT, VARIABLE THICKNESS FOR TRENCH RESTORATION, CLASS B-32	50	C.Y.	310	15,500
005	4.06 CONCRETE IN STRUCTURES, CLASS A-40	60	C.Y.	1,800	108,000
006	4.07 CB NEW GRANITE CURB, STRAIGHT	650	L.F.	168	109,200
007	4.07 CC NEW GRANITE CURB, CORNER	40	L.F.	250	10,000
008	4.07 CD NEW STRAIGHT GRANITE CURB, DEPRESSED AND TRANSITION	60	L.F.	300	18,000
009	4.08 AA CONCRETE CURB (18" DEEP)	50	L.F.	50	2,500
010	4.11 ARW RETAINING WALL EXCAVATION	500	C.Y.	150	75,000
011	4.11 CA FILL, PLACE MEASUREMENT	500	C.Y.	40	20,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

NO.	DESCRIPTION	QTY	UNIT	EST. PRICE	TOTAL PRICE
012	4.13 ABX 4" CONCRETE SIDEWALK WITH SPECIAL SCORING (PIGMENTED)	6,600	S.F.	15	99,000
013	4.13 BBX 7" CONCRETE SIDEWALK WITH SPECIAL SCORING (PIGMENTED)	1,700	S.F.	18	30,600
014	4.13 DE EMBEDDED PREFORMED DETECTABLE WARNING UNITS	30	S.F.	30	900
015	4.14 STEEL REINFORCEMENT BARS	2,000	LBS	1	2,000
016	4.20 SEEDING	4,900	S.Y.	1	4,900
017	4.21 TREE CONSULTANT	40	P/HR	65	2,600
018	4.22 B PROTECTIVE TREE BARRIER, TYPE 'B'	20	EA	500	10,000
019	52.41 D06N NEW 6" DIP HOUSE CONNECTION DRAIN ON STONE BEDDING	900	L.F.	250	225,000
020	50.31 SC08 8" ESVP SANITARY SEWER, ON CONCRETE CRADLE	730	L.F.	500	365,000
021	50.31 SC10 10" ESVP SANITARY SEWER, ON CONCRETE CRADLE	150	L.F.	500	75,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

022	51.11 P004 STANDARD 4'-0" DIAMETER PRECAST MANHOLE	20	EA	15,000	300,000	
023	51.41 S002 STANDARD CATCH BASIN, TYPE 2	2	EA	6,500	13,000	
024	51.41 S003 STANDARD CATCH BASIN, TYPE 3	1	EA	7,000	7,000	
025	52.11 D12 12" DUCTILE IRON PIPE BASIN CONNECTION	25	L.F.	300	7,500	
026	53.11 DR TELEVISION INSPECTION AND DIGITAL AUDIO-VISUAL RECORDING OF SEWERS	1,800	L.F.	3	6,300	
027	54.11 SC SEWER CLEANING	500	L.F.	10	5,000	
028	54.12 CS CLEANING OF DRAINAGE STRUCTURES	20	C.Y.	500	10,000	
029	54.12 SEP PUMP OUT AND DISPOSE OF CONTENTS OF SEPTIC TANK	10	C.Y.	150	1,500	
030	56.10 4" DIP SANITARY FORCE MAIN	120	L.F.	450	54,000	
031	56.20 CLEAN-OUT RISER PIPE AND CASTING	5	EA	21,500	121,500	
032	56.30 HOUSE TRAP AND PIT STRUCTURE	5	EA	7,500	37,500	

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

SECTION		QUANTITY		UNIT		ESTIMATED COST		TOTAL COST	
NO.	DESCRIPTION	QTY	UNIT	QTY	UNIT	EST. COST	UNIT	TOTAL COST	UNIT
033	56.40 NEW SANITARY SEWER EJECTOR PIT AND PUMP SYSTEM INSTALLED IN BASEMENT OF THE TAVERN BUILDING	1	L.S.	30,000		30,000		30,000	
034	56.50 REMOVE EXISTING SANITARY SEWER EJECTOR PUMP SYSTEM IN BASEMENT OF THE MUSEUM BUILDING; REPLACE WITH GRAVITY SANITARY SEWER SYSTEM	1	L.S.	10,000		10,000		10,000	
035	6.02 AAN UNCLASSIFIED EXCAVATION	2,000	C.Y.	57		114,000		114,000	
036	6.06 BB GRANITE BLOCK SIDEWALK (GROUTED JOINTS; SALVAGED BLOCK)	10	S.Y.	510		5,100		5,100	
037	6.07 AA EXISTING BLUESTONE FLAGS RELAID	750	S.F.	20		15,000		15,000	
038	6.22 F ADDITIONAL HARDWARE	1,000	LBS	0	75	750		750	
039	6.23 AF F & I F.D. POLE TERMINAL (CHIPPY) BOX IN ACCORDANCE WITH F.D. STD. DWG. #145AA	3	EA	875		2,625		2,625	
040	6.23 BA F & I FIRE ALARM POST AND SUBBASE IN ACCORDANCE WITH F.D. STD. DWG. #141	1	EA	1,800		1,800		1,800	
041	6.23 BBS F & I 3" 90-DEGREE PVC WIDE BENDS, SCHED 40, W/O PAVT EXCAV IN ACCORDANCE WITH F.D. STD. DWG. #141	3	EA	150		450		450	

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

SEQ. NO.	DESCRIPTION	QTY	UNIT	EST. PRICE	TOTAL
042	6.23 BCS F & 1/2" PVC CONDUIT SCHEDULE 40, U.L.651 W/O PAVEMENT EXCAVATION	650	L.F.	42	27,300
043	6.23 BD F & 1/4-PAIR FIRE ALARM CABLE	680	L.F.	25	17,000
044	6.23 BFB F & 1 FIRE DEPARTMENT 24 WIRE TERMINAL BOX AND TERMINATE FIRE ALARM CABLES	1	EA	1400	1400
045	6.23 BGD F & 1/3" PVC CONDUIT TO 3" GALVANIZED STEEL REDUCER BUSHING IN ACCORDANCE WITH F.D. STD. DWG. #145AA	3	EA	88	264
046	6.23 HH F & 1 FEDNY SIDEWALK HANDHOLE WITH FRAME AND COVER (TYPE "A" MANHOLE) ACCORDANCE WITH F.D. STD. DWG. #143, #144B AND #144E	4	EA	9,150	36,600
047	6.23 XAPE F & 1/2" GALVANIZED STEEL CONDUIT POLE RISER IN ACCORDANCE WITH F.D. STD. DWG. #145AA	3	EA	960	2,880
048	6.23 XCPE F & 1/3" GALVANIZED STEEL CONDUIT POLE RISER IN ACCORDANCE WITH F.D. STD. DWG. #145AA	3	EA	1900	5,700
049	6.24 ASPHALTIC CONCRETE SIDEWALK	30	S.F.	44	1320
050	6.24 X GRAVEL WALKWAY, 6" THICK	490	S.F.	11	5390

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

051	6.40 B ENGINEER'S FIELD OFFICE (TYPE B)	24	MO	6,500	156,000
052	6.41 LINE AND GRADE SURVEYS	1	L.S.	25,000	25,000
053	6.43 PHOTOGRAPHS	1,000	SETS	27	27,000
054	6.46 DENSE-GRADED STONE BASE	1,010	C.Y.	60	60,600
055	6.55 SAWCUTTING EXISTING PAVEMENT	3,900	L.F.	2	9,750
056	6.56 ERGC EPOXY RESIN GRANITE CHIP PAVEMENT OVERLAY	40,000	S.F.	4	160,000
057	6.58 TACK COAT	4,700	S.Y.	1	4,700
058	6.66 X FURNISH AND INSTALL BRICK PAVERS	1,500	S.F.	30	45,000
059	6.68 PLASTIC FILTER FABRIC	4,500	S.Y.	3	15,750
060	6.70 MAINTENANCE AND PROTECTION OF TRAFFIC	1	L.S.	100,000	100,000
061	6.99 AUDIO/VIDEO DOCUMENTATION SURVEY	1	L.S.	10,000	10,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

ITEM NO.	DESCRIPTION	QUANTITY	UNIT	EST. PRICE	TOTAL PRICE	
062	60.11 R606 FURNISHING AND DELIVERING 6-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	100	L.F.	45	4,500	
063	60.11 R608 FURNISHING AND DELIVERING 8-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	1,100	L.F.	65	71,500	
064	60.11 R612 FURNISHING AND DELIVERING 12-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	20	L.F.	105	2,100	
065	60.12 D06 LAYING 6-INCH DUCTILE IRON PIPE AND FITTINGS	120	L.F.	150	18,000	
066	60.12 D08 LAYING 8-INCH DUCTILE IRON PIPE AND FITTINGS	1,300	L.F.	200	260,000	
067	60.12 D12 LAYING 12-INCH DUCTILE IRON PIPE AND FITTINGS	25	L.F.	220	5,500	
068	60.13 M0A24 FURNISHING AND DELIVERING DUCTILE IRON MECHANICAL JOINT 24-INCH DIAMETER AND SMALLER FITTINGS, INCLUDING WEDGE-TYPE RETAINER GLANDS	3	TONS	2,500	7,500	
069	61.11 DMM06 FURNISHING AND DELIVERING 6-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	8	EA	1,120	9,000	



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

NO.	DESCRIPTION	UNIT	QTY	UNIT PRICE	TOTAL PRICE
070	61.11 DMM08 FURNISHING AND DELIVERING 8-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE- TYPE RETAINER GLANDS	EA	6	1,800	10,800
071	61.12 DMM06 SETTING 6-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	EA	8	1,000	8,000
072	61.12 DMM08 SETTING 8-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	EA	6	2,000	12,000
073	62.11 SS FURNISHING AND DELIVERING HYDRANTS - SMITH TYPE (S-2-LP)	EA	7	5,000	35,000
074	62.12 SG SETTING HYDRANTS COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	EA	7	1,500	10,500
075	62.13 RH REMOVING HYDRANTS	EA	5	250	1,250
076	62.14 FS FURNISHING, DELIVERING AND INSTALLING HYDRANT FENDERS	EA	14	300	4,200

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

SECTION NO.	DESCRIPTION	QUANTITY	UNIT	EST. PRICE	TOTAL	EST. PRICE	TOTAL
077	63.11 VC FURNISHING AND DELIVERING VARIOUS CASTINGS	5	TONS	1,000		5,000	
078	64.11 ST WITHDRAWING AND REPLACING HOUSE SERVICES USING SMALLER THAN 1.5-INCH SCREW TAPS	1	EA	500		500	
079	64.11 EL WITHDRAWING AND REPLACING HOUSE SERVICES USING 1.5-INCH OR LARGER SCREW TAPS	3	EA	500		1,500	
080	64.12 ESLT EXTENDING HOUSE SERVICE WATER CONNECTIONS (LESS THAN 3-INCH DIAMETER)	220	L.F.	150		33,000	
081	65.11 BR FURNISHING, DELIVERING AND INSTALLING BANDS, RODS, WASHERS, ETC., COMPLETE, FOR RESTRAINING JOINTS	300	LB	1		300	
082	65.21 PS FURNISHING AND PLACING POLYETHYLENE SLEEVE	1,220	L.F.		10	122	
083	65.31 FF FURNISHING, DELIVERING, AND PLACING FILTER FABRIC	24,400	S.F.		10	2440	
084	65.71 SG FURNISHING, DELIVERING AND PLACING SCREENED GRAVEL OR BROKEN STONE BEDDING	100	C.Y.	15		1,500	
085	68.10 WATER METER / DCV PIT AND ASSOCIATED WORK	2	EA	142,000		284,000	

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

NO.	DESCRIPTION	QTY	UNIT	AMOUNT	AMOUNT
086	68.20 A FURNISH AND INSTALL 1" CURB VALVES	1	EA	1,000	1,000
087	68.20 C FURNISH AND INSTALL 2" CURB VALVES	2	EA	1,200	1,200
088	68.20 D FURNISH AND INSTALL 2-1/2" CURB VALVES	1	EA	1,350	1,350
089	7.13 B MAINTENANCE OF SITE	24	MO	5,000	120,000
090	7.16 D TEST PITS	50	C.Y.	150	7,500
091	7.88 AA RODENT INFESTATION SURVEY AND MONITORING	1	L.S.	1,000	1,000
092	7.88 AB RODENT BAIT STATIONS	50	EA	25	1,250
093	7.88 AC BAITING OF RODENT BAIT STATIONS	50	EA	12	600
094	7.88 AD WATERBUG BAIT APPLICATIONS	20	BLOCK	25	500
095	70.31 FN TEMPORARY FENCE	6,000	L.F.	40	240,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-JM  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

096	70.51 EO EXCAVATION OF BOULDERS IN OPEN CUT	15	C.Y.	150	2,250	
097	70.71 SB STONE BALLAST	12	C.Y.	25	300	
098	70.81 CB CLEAN BACKFILL	220	C.Y.	20	4400	
099	70.91 SW/2 FURNISHING AND PLACING SHEETING AND BRACING IN TRENCH FOR WATER MAIN PIPE 12-INCHES IN DIAMETER AND LESS	5,000	S.F.	50	2,500	
100	73.11 AB ADDITIONAL BRICK MASONRY	10	C.Y.	50	500	
101	73.21 AC ADDITIONAL CONCRETE	15	C.Y.	120	1,800	
102	73.31 AE0 ADDITIONAL EARTH EXCAVATION INCLUDING TEST PITS, ALL DEPTHS	210	C.Y.	20	4,200	
103	73.41 AG ADDITIONAL SELECT GRANULAR BACKFILL	10	C.Y.	20	200	
104	73.51 AS ADDITIONAL STEEL REINFORCING BARS	800	LB	1	800	
105	76.31 CM CONTINUOUS REAL-TIME MONITORING FOR VIBRATIONS AND MOVEMENTS-AND-POST-CONSTRUCTION-REPORT	6	MO	35,000	210,000	

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

NO.		DESCRIPTION		UNITS		QUANTITY		UNIT PRICE		TOTAL PRICE	
106	8.02 A	SPECIAL CARE EXCAVATION AND RESTORATION FOR SIDEWALK WORK		560	S.F.	10					5,600
107	8.02 B	SPECIAL CARE EXCAVATION AND RESTORATION FOR CURB WORK		90	L.F.	15					1,350
108	8.10 C-1	NEW SURVEY MONUMENT, TYPE "C", CLASS 1		1	EA	6,500					6,500
109	8.22 BR	RESTORE EXISTING BRICK RETAINING WALL		5	C.Y.	500					2,500
110	8.22 RS	RESTORE EXISTING RUBBLE STONE RETAINING WALL		80	C.Y.	400					32,000
111	9.30	STORM WATER POLLUTION PREVENTION		1	L.S.	100,000					100,000
112	500 AT	ARCHEOLOGICAL TESTING		120	P/HR	150					18,000
113	500 AM	ARCHEOLOGICAL MONITORING		120	P/HR	150					18,000
114	500 AC	ARCHEOLOGICAL CONSERVATION		1	FIXED SUM			\$11,000	.00		\$11,000 .00
115	500 AL	ARCHEOLOGICAL LAB AND FIELD TECHNICIAN		1	FIXED SUM			\$11,000	.00		\$11,000 .00
116	500 AFR	ARCHEOLOGICAL FINAL REPORT		1	FIXED SUM			\$22,000	.00		\$22,000 .00

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

LINE NO.	DESCRIPTION	QTY	UNIT	FIXED SUM	PERCENT	FIXED SUM	PERCENT
117	500 PA PHYSICAL ANTHROPOLOGIST	1				\$11,000	.00
118	500 PE PUBLIC EDUCATION PROGRAM	1	FIXED SUM			\$10,000	.00
119	A-060000 A BUILDING ARCHITECTURAL WORK - SEAMAN'S COTTAGE, BUILDING # 24	1	L.S.			100,000	
120	A-060000 B BUILDING ARCHITECTURAL WORK - MUSEUM, BUILDING # 23	1	L.S.			30,000	
121	A-060000 C BUILDING ARCHITECTURAL WORK - COURT HOUSE, BUILDING # 1	1	L.S.			35,000	
122	A-060000 D BUILDING ARCHITECTURAL WORK - PS 28, BUILDING 'L'	1	L.S.			50,000	
123	A-060000 E BUILDING ARCHITECTURAL WORK - SCHWIEBERT HOUSE, BUILDING 'J'	1	L.S.			35,000	
124	A-060000 F BUILDING ARCHITECTURAL WORK - BENNETT HOUSE # 27, BUILDING # 16	1	L.S.			35,000	
125	A-060000 G BUILDING ARCHITECTURAL WORK - TRANSPORTATION MUSEUM, BUILDING 'R'	1	L.S.			40,000	

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

LINE NO.	DESCRIPTION	QTY	UNIT	EST. PRICE	ALLOTTED PRICE
126	A-060000 H BUILDING ARCHITECTURAL WORK - STEPHENS-PRIER HOUSE, BUILDING 'O'	1	L.S.	40,000	40,000
127	A-060000 I BUILDING ARCHITECTURAL WORK - GUYON STORE/ TAVERN, BUILDING #7	1	L.S.	30,000	30,000
128	A-060000 J BUILDING ARCHITECTURAL WORK - NEW DORP RAILROAD STATION, BUILDING 'P'	1	L.S.	15,000	15,000
129	C-271343 TELEPHONE SERVICE CABLE AND EQUIPMENT	4,400	L.F.	60	264,000
130	E-16130.03 A F & I PULL BOXES (NEMA 4X STAINLESS STEEL)	1	EA	915	915
131	E-16130.06 A F & I JUNCTION BOXES (NEMA 4X STAINLESS STEEL)	1	EA	1,300	1,300
132	E-260010 A BUILDING ELECTRICAL WORK - SEAMAN'S COTTAGE, BUILDING # 24	1	L.S.	170,000	170,000
133	E-260010 B BUILDING ELECTRICAL WORK - MUSEUM, BUILDING # 23	1	L.S.	46,000	46,000
134	E-260010 C BUILDING ELECTRICAL WORK - COURT HOUSE, BUILDING # 1	1	L.S.	51,000	51,000
135	E-260010 D BUILDING ELECTRICAL WORK - PS 28, BUILDING 'L'	1	L.S.	51,000	51,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

136	E-260010 E BUILDING ELECTRICAL WORK - SCHWIEBERT HOUSE, BUILDING 'J'	1	L.S.	66,000	66,000	
137	E-260010 F BUILDING ELECTRICAL WORK - BENNETT HOUSE # 27, BUILDING # 16	1	L.S.	12,000	12,000	
138	E-260010 G BUILDING ELECTRICAL WORK - TRANSPORTATION MUSEUM, BUILDING 'R'	1	L.S.	40,000	40,000	
139	E-260010 H BUILDING ELECTRICAL WORK - SHED 38, BUILDING 'R'	1	L.S.	35,000	35,000	
140	E-260010 I BUILDING ELECTRICAL WORK - STEPHENS-PRIER HOUSE, BUILDING 'O'	1	L.S.	12,000	12,000	
141	E-260010 J BUILDING ELECTRICAL WORK - GUYON STORE/ TAVERN, BUILDING #7	1	L.S.	46,000	46,000	
142	E-260010 K BUILDING ELECTRICAL WORK - NEW DORP RAILROAD STATION, BUILDING 'P'	1	L.S.	26,000	26,000	
143	E-260010 L BUILDING ELECTRICAL WORK - COLON STORE/ TINSMITH, BUILDING #22	1	L.S.	65,000	65,000	
144	E-260010 M BUILDING ELECTRICAL WORK - GENERAL STORE, BUILDING #19	1	L.S.	5,000	5,000	



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

CONTRACT DESCRIPTION		ESTIMATED AMOUNT		UNIT PRICE	
LINE NO.	DESCRIPTION	QTY	UNIT	AMOUNT	AMOUNT
145	E-260010 N BUILDING ELECTRICAL WORK - PRINT SHOP, BUILDING #18	1	L.S.	6,500	6,500
146	E-260010 O BUILDING ELECTRICAL WORK - CARPENTERS SHOP, BUILDING #17	1	L.S.	6,500	6,500
147	E-260020 ELECTRICAL UTILITY SERVICE WORK, INCLUDING REMOVALS AND NEW FENCING	1	L.S.	110,000	110,000
148	E-260020 A CON ED SUPPLIED EQUIPMENT AND SERVICE WORK	1	FIXED SUM	\$67,000	\$67,000 .00
149	E-260020 TW ALLOWANCE FOR TIME WARNER PERFORMED WORK	1	FIXED SUM	\$7,000	\$7,000 .00
150	E-260020 V ALLOWANCE FOR VERIZON PERFORMED WORK	1	FIXED SUM	\$5,000	\$5,000 .00
151	E-260533 AA METAL CONDUIT AND TUBING (3/4" GALVANIZED RIGID STEEL CONDUIT)	50	L.F.	11	550
152	E-260533 AF METAL CONDUIT AND TUBING (1 1/2" GALVANIZED RIGID STEEL CONDUIT)	20	L.F.	18	360
153	SL-20.01.01 F & I FOUNDATION FOR TYPE "B" OR "B12" POST WITH INTERNAL FLANGE, AS PER DRAWING E-3884	25	EA	900	22,500

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-4H  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

SECTION	DESCRIPTION	QUANTITY	UNIT	PRICE	TOTAL	UNIT PRICE	TOTAL
154	SL-21.01.07 F & I TYPE "B" LAMPOST WITH INTERNAL FLANGE (INCLUDES GFI LAMPOST RECEPTACLE CORDS)	25	EA	6,500	162,500		
155	SL-22.01 A LED RIVERSIDE PARK LUMINAIRE W/DIMMING NODE AND GATEWAY / DIMMING SOFTWARE	25	EA	4,300	107,500		
156	SL-25.01.15 F & I FIRE ALARM BRACKET ARM AND LUMINAIRE WITH 7W FLUORESCENT LAMP ON METAL POLE	1	EA	3,500	3,500		
157	SL-33.01.01 A FURNISH AND INSTALL NO. 14 AWG XLP COPPER WIRE OR EQUAL IN CONDUIT (TYPE THHN)	150	L.F.	2	300		
158	SL-33.01.01 B FURNISH AND INSTALL NO. 10 AWG XLP COPPER WIRE OR EQUAL IN CONDUIT	300	L.F.	2	750		
159	SL-33.01.02 FURNISH AND INSTALL NO. 6 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	11,100	L.F.	4	49,980		
160	SL-33.01.02 A FURNISH AND INSTALL NO. 4 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	26,000	L.F.	6	156,000		
161	SL-33.01.03 FURNISH AND INSTALL NO. 2 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	14,000	L.F.	8	112,000		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

LINE NO.	DESCRIPTION	QTY	UNIT	EST. PRICE	TOTAL PRICE
162	SL-33.01.05 FURNISH AND INSTALL NO. 4/0 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	22,000	L.F.	15	330,000
163	SL-33.01 A 600 VOLT, GROUND WIRE, #2/0 AWG	4,000	L.F.	10	40,000
164	SL-33.01 B 600 VOLT, GROUND WIRE, #2 AWG	3,400	L.F.	6	20,400
165	SL-33.01 C 600 VOLT, GROUND WIRE, #4 AWG	2,000	L.F.	5	10,000
166	SL-33.01 D 600 VOLT, GROUND WIRE, #6 AWG	500	L.F.	4	2,000
167	SL-33.01 E 600 VOLT, GROUND WIRE, #10 AWG	50	L.F.	2	125
168	SL-35.03.01 FURNISH AND INSTALL 3/4" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	90	L.F.	63	5670
169	SL-35.03 B FURNISH AND INSTALL 1" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	200	L.F.	60	12,000
170	SL-35.03.03 FURNISH AND INSTALL 1-1/2" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	200	L.F.	70	14,000
171	SL-35.03.05 FURNISH AND INSTALL 3" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	300	L.F.	117	35,100

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

REQ. NO.	ITEM NAME AND DESCRIPTION	ENGINEER'S ESTIMATE OF QUANTITY	UNIT	UNIT PRICE (IN DOLLARS)	EXTENDED AMOUNT (IN FIGURES)
172	SL-35.04.01 FURNISH AND INSTALL 2" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	1,800	LF.	16	28,800
173	SL-35.04.02 FURNISH AND INSTALL 3" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	12,500	LF.	52	650,000
174	SL-35.04.03 FURNISH AND INSTALL 4" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	9,000	LF.	52	468,000
175	SL-37.05 A 17" X 30" POLYMER CONCRETE BOX AND COVER	23	EA	2,500	57,500
176	SL-37.05 B 24" X 36" POLYMER CONCRETE BOX AND COVER	13	EA	3,000	39,000

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

SECTION	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL PRICE	EXTEND AMOUNT
				(IN FIGURES)	(IN FIGURES)	(IN FIGURES)
				DOLLARS	DOLLARS	DOLLARS
177	SL-37.05 C 36" X 36" POLYMER CONCRETE BOX AND COVER	EA	28	3,600	100,800	
178	GET Specifications & Sketches Protection and Support of Existing Underground Utilities	L.S.	1	200,000	200,000	

SUB-TOTAL: \$ 8,464,811.00

179	6.39 A MOBILIZATION	L.S.	1	338,589.00	338,589	
<p>BID PRICE OF MOBILIZATION SHALL NOT EXCEED 4% OF THE ABOVE SUB-TOTAL PRICE.</p>						

TOTAL BID PRICE: \$ 8,803,400

PLEASE BE SURE A LEGIBLE BID IS ENTERED FOR EACH ITEM.  
THE BIDDER SHALL INSERT THE TOTAL BID PRICE IN  
THE BID FORM ON PAGE 13 OF THIS BID BOOKLET.

## **BIDDER'S IDENTIFICATION OF SUBCONTRACTORS**

### **NOTICE TO BIDDERS**

**SUBMISSION:** The Bidder must, at the time of the bid, submit the form on the next page ("BIDDER'S IDENTIFICATION OF SUBCONTRACTORS"). This form must be submitted in a separate, sealed envelope (BID ENVELOPE #2). Failure to do so will result in the disqualification of the bid as non-responsive.

\*\*\*\*\*

Please be advised that pursuant to GML § 101(5) the Bidder is required to submit with its bid the names of subcontractors it intends to use to perform the following work on this contract, as well as the agreed-upon amount to be paid to each:

- plumbing and gas fitting;
- steam heating, hot water heating, ventilating and air conditioning apparatus; and
- electric wiring and standard illuminating fixtures.

**NOTE:** This project may not involve all of the above listed subcontractors. Please see the form on the next page which indicates the subcontractors required for this Project.

The list of subcontractors is to be submitted in a separate sealed envelope by completing the form on the next page entitled "Bidder's Identification of Subcontractors". This form provides for the identification of any subcontractors intended to be used in any of the three trades listed above. If bidder intends to use its own forces for any of the above listed work, bidder should so indicate on the form.

Failure to submit the completed form on the next page ("Bidder's Identification of Subcontractors") that includes the names of subcontractors and the agreed upon amounts to be paid to such subcontractors will render the bid non-responsive.

**PLEASE NOTE:** for any contract that is subject to M/WBE Participation Goals under Section 6-129 of the Administrative Code of the City of New York, if the bidder's intention to use its own forces to do any of the above-referenced work would result in Bidder's failure to attain the Participation Goals identified in the M/WBE Utilization Plan, the bid will be non-responsive unless the bidder requests and obtains a full or partial waiver of the Participation Goals (M/WBE Utilization Plan, Part III) in advance of bid submission. For more information see Notice to All Prospective Contractors, Participation by Minority-Owned and Women-Owned Business Enterprises in City Procurement.

After the low bid is announced, the sealed list submitted by the low bidder will be opened and the names of the subcontractors will be announced. The sealed lists of subcontractors submitted by all other bidders shall be maintained by the Agency unopened unless such bidder shall become the low bidder (e.g., the initial low bidder is found non-responsive). All unopened lists of subcontractors shall be returned to the bidders unopened after contract award, unless the bidder has given the agency permission to shred the form.

After bid submission, any change of subcontractor or agreed-upon amount to be paid to each shall require approval of the Agency upon a showing of a legitimate construction need which shall include, but not be limited to, a change in project specifications, a change in project material costs, a change to subcontractor status as determined pursuant to §222 (2)(e) of the Labor Law, or if the subcontractor has become otherwise unwilling, unable or unavailable to perform the subcontract.

**BIDDER'S IDENTIFICATION OF SUBCONTRACTORS**

Project ID: PVC341-M

**SUBMISSION:** In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

**1. ELECTRICAL CONTRACTOR:**

Windsor Electric  
(Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ 1,800,000.00

**BIDDER'S SIGNATURE:** The Bidder must sign this form in the space provided below:

Name of Bidder: JRCRUZ Corp.

By: \_\_\_\_\_  
Signature of Partner or Corporate Officer

Print Name: Evaristo Cruz, Jr., P.E.

Title: President

**Qualification Form**

Project ID: PVC341-M

List previous projects completed to meet the special experience requirements for this contract. Please photocopy this form for submission of all required projects.

Name of Contractor: PLEASE SEE ATTACHED LIST OF COMPLETED PROJECTS

Name of Project: \_\_\_\_\_

Location of Project: \_\_\_\_\_

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: \_\_\_\_\_

Title: \_\_\_\_\_ Phone Number: \_\_\_\_\_

Brief description of work completed: \_\_\_\_\_

\_\_\_\_\_

Was the work performed as a prime or a subcontractor: \_\_\_\_\_

Amount of Contract: \_\_\_\_\_

Date of Completion: \_\_\_\_\_

\*\*\*\*\*

Name of Contractor: \_\_\_\_\_

Name of Project: \_\_\_\_\_

Location of Project: \_\_\_\_\_

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: \_\_\_\_\_

Title: \_\_\_\_\_ Phone Number: \_\_\_\_\_

Brief description of work completed: \_\_\_\_\_

\_\_\_\_\_

Was the work performed as a prime or a subcontractor: \_\_\_\_\_

Amount of Contract: \_\_\_\_\_

Date of Completion: \_\_\_\_\_





**A. Project References - Similar Contracts Completed by The Bidder**

PROJECT NAME, LOCATION DESCRIPTION	CONTRACT TYPE/DETAILS	CONTRACT AMOUNT	DATE COMPLETED	OWNER REFERENCE/ TELEPHONE #	ENGINEER REFERENCE/ TELEPHONE #
HWKP2009 CONSTRUCTION OF BULKHEAD AT EAST 68th STREET BROOKLYN, NY	HIGHWAY SEA WALL 620lf PZ27 Steel Sheet Pile Sea Wall 520lf Pile Cap 620lf Concrete Curbs/ Sidewalks 2000sy Asphalt Roadway	\$838,838.00	JUNE 2002/ DEC. 2002	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER MAX ACHILLE (718) 780-8012
SE-759760762(BMP) CONST. OF STORM & SANITARY SEWERS, WATER MAINS, CURBS, SIDEWALKS AND ROAD RESTORATION IN ARBUTUS AVE., S.I. N.Y.	37000lf Sewer Installation (48"-10" dia) 11055lf Water Main Installation 1300lf Microtunnelling 8 ea Chamber Construction 7.5 ac BMP Construction 44000sy Asphalt Roadway	\$19,881,988.00	JULY 2001/ JULY 2003	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER THOMAS FOLEY P.E. (718) 391-1907
SER002248 CONST. OF STORM & SANITARY SEWERS, WATER MAINS, CURBS, SIDEWALKS AND ROAD RESTORATION IN NETHERLAND AVE., S.I. N.Y.	2952lf Sewer Installation (6.5'X3' Curb-10" dia) 1800lf Water Main Installation (20"-6" dia) 2 ea Chamber Construction 1300sy Asphalt Roadway	\$1,868,168.00	OCTOBER 2002/ JULY 2003	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER WALKMAN WONG P.E. (718) 391-1907
SER002166 CONST. OF STORM & SANITARY SEWERS AND INSTALLATION OF WATER MAINS IN BLOOMINGDALE ROAD St. NY	8800lf Sewer Installation (30"-10" dia) 4000lf Water Main Installation (20"-6" dia) 14000sy Asphalt Roadway	\$4,345,543.00	OCTOBER 2004	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER THOMAS FOLEY, P.E. (718) 391-1907
SER200170 CONST. OF COMBINED SEWERS IN HYLAN BLVD. STATEN ISLAND, NY	SEWERS WATER MAINS CURBS AND SIDEWALKS	\$1,668,668.00	Nov. 2004	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER BOB YUEH (917) 939-7725



## A. Project References - Similar Contracts Completed by The Bidder

2 of 5

PROJECT NAME, LOCATION DESCRIPTION	CONTRACT TYPE	CONTRACT AMOUNT	DATE COMPLETED	OWNER REFERENCE/ TELEPHONE #	ENGINEER REFERENCE/ TELEPHONE #
SER002204 CONST. OF SANITARY SEWERS IN WAGNER STREET STATEN ISLAND, NY	INSTALL SANITARY SEWERS CURBS AND SIDEWALKS	\$1,168,168.00	May 2005	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER WALKMAN WONG, P.E. (718) 391-1907
SER002286 CONST. OF SANITARY SEWERS IN WESTWOOD AVENUE STATEN ISLAND, NY	INSTALL SANITARY SEWERS CURBS AND SIDEWALKS	\$3,473,374.00	June 2005	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER CHRIS IGWEATU (718) 391-1907
SER20088 CONST. OF STORM & SANITARY SEWERS, BMPS, CURBS, SIDEWALKS AND ROAD RESTORATION IN EDGE GROVE AVE., S.I. N.Y.	SEWER/ BMP	\$5,828,901.00	July 2005	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER THOMAS FOLEY P.E. (718) 391-1907
CONTRACT NO. HWRP2004 RECONSTRUCTION OF BAY STREET STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS, CURBS SIDEWALKS, ETC.	\$1,671,624.00	March 2006	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER ADAM ALWEISS (718) 391-1907
CONTRACT NO. SER200187 CONSTRUCTION OF STORM & SANITARY SEWERS AND INSTALLATION OF WATER MAINS IN FLINT STREET, STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS, CURBS SIDEWALKS, ETC.	\$1,838,838.00	May 2006	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER ADAM ALWEISS (718) 391-1907
SE774 CONST. OF SANITARY SEWERS WATER MAINS AND MICROTUNNELING IN FORT HAMILTON PARKWAY BROOKLYN, NY	INSTALL SANITARY SEWERS WATER MAINS MICROTUNNELING	\$6,876,542.00	November 2006	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3rd FL LONG ISLAND CITY, N.Y. 11101	SAME AS OWNER ROBERT YUEH (718) 250-5047



PROJECT NAME, LOCATION DESCRIPTION	CONTRACT TYPE	CONTRACT AMOUNT	DATE COMPLETED	OWNER REFERENCE/ TELEPHONE #	ENGINEER REFERENCE/ TELEPHONE #
CONTRACT NO. HWC988E SAFETY IMPROVEMENTS TO AMBOY ROAD STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS SIDEWALKS, ETC.	\$2,607,769.00	November 2006	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER SANJAY MODI (718) 317-0501
CONTRACT NO. KERRIGAN AVENUE SEWER REPLACEMENT KERRIGAN AVENUE, JERSEY CITY, NJ	SEWER REPLACEMENT	\$3,288,168.00	December 2006	NORTH HUDSON SEWERAGE AUTHORITY 1600 ADAMS STREET HOBOKEN, NJ 07030	CH2MHILL DAVE MISSIG, P.E. (973) 316-0159
CONTRACT NO. SER002216 CONSTRUCTION OF STORM & SANITARY SEWERS AND INSTALLATION OF WATER MAINS IN RIDGECREST AVE., STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS SIDEWALKS, ETC.	\$3,960,581.20	December 2006	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER SAM RIAD, P.E. (718) 391-1907
CONTRACT NO. SEQ200463 CONSTRUCTION OF STORM AND SANITARY SEWERS IN THURSBY AVE. BOROUGH OF QUEENS, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS SIDEWALKS, ETC.	\$7,785,948.00	July 2007	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER HERMAN RIZO, P.E. (718) 391-1907
CONTRACT NO. SE-208C CONSTRUCTION OF STORM & SANITARY SEWERS AND INSTALLATION OF WATER MAINS IN HAROLD ST., STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS SIDEWALKS, ETC.	\$14,750,000.00	June 2007	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER SHAKEEL AHMED, P.E. (718) 391-1907
SEQ200509 CONSTRUCTION OF STORM SEWERS AND WATER MAINS IN ROCKAWAY BEACH BLVD. QUEENS, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS SIDEWALKS, ETC.	\$1,388,888.00	July 2007	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE LONG ISLAND CITY, NY 11101	SAME AS OWNER HERMAN RIZO, P.E. 718-391-1907



## A. Project References - Similar Contracts Completed by The Bidder

PROJECT NAME, LOCATION DESCRIPTION	CONTRACT TYPE/ DETAILS	CONTRACT AMOUNT	DATE COMPLETED	OWNER REFERENCE/ TELEPHONE #	ENGINEER REFERENCE/ TELEPHONE #
SE-777-R CONSTRUCTION OF STORM AND SANITARY SEWERS WATER MAINS AND BMP WORK NORTH RAILROAD STREET STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS, CURBS SIDEWALKS AND BMP WORK	\$34,720,000.00	August, 2010	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3RD FL. LONG ISLAND CITY, NY 11101	SAME AS OWNER SHAKEEL AHMED, P.E. (718) 391-1907
SER002167 CONSTRUCTION OF SANITARY AND STORM SEWERS AND THE INSTALLATION OF WATER MAINS IN RICHMOND TERRACE STATEN ISLAND, NY	CONSTRUCTION OF SANITARY AND STORM SEWERS AND WATER MAINS	\$5,231,290.00	Feb-11	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3RD FLOOR LONG ISLAND CITY, NY 11101	SAME AS OWNER SHAKEEL AHMED, P.E. 718-391-1907
HWSEMERG EMERGENCY CURB & SIDEWALK REPAIRS VARIOUS LOCATIONS IN QUEENS, NEW YORK	CURB AND SIDEWALK REPAIRS	\$2,000,000.00	December, 2010	N.Y.C. DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3RD FLOOR LONG ISLAND CITY, NY 11101	SAME AS OWNER HERMAN RIZO 718-391-1907
CSO-IH-12 CONSTRUCTION OF INNER HARBOR IN LINE STORAGE FACILITIES BROOKLYN, NY	COMBINE SEWER OVERFLOW SOLIDS FLOATABLE STORAGE	\$12,954,128.00	Mar-11	N.Y.C DEPT. OF ENVIRONMENTAL PROTECTION 59-17 JUNCTION BLVD., 17TH FLOOR FLUSHING, NY 11373	SAME AS OWNER WARREN GORDON 718-595-6229





**A. Project References- Similar Contracts Completed by The Bidder**

PROJECT NAME, LOCATION DESCRIPTION	CONTRACT TYPE/ DETAILS	CONTRACT AMOUNT	DATE COMPLETED	OWNER REFERENCE/ TELEPHONE #	ENGINEER REFERENCE/ TELEPHONE #
SE-801 CONSTRUCTION OF STORM AND SANITARY SEWERS IN ALBEE AVENUE STATEN ISLAND, NY	INSTALL SANITARY & STORM SEWERS, WATER MAINS , CURBS AND SIDEWALKS	\$15,383,383.00	Aug-11	N.Y.C DEPT. OF DESIGN & CONSTRUCTION 30-30 THOMSON AVENUE, 3RD FL. LONG ISLAND CITY, NY 11101	SAME AS OWNER SHAKEEL AHMED, P.E. (718) 391-1907



BID BOND 1  
FORM OF BID BOND

KNOW ALL MEN BY THESE PRESENTS. That we, JRCruz Corp.

hereinafter referred to as the "Principal", and Liberty Mutual Insurance Company

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of \_\_\_\_\_

Ten Percent of Bid Amount

(\$ \_\_\_\_\_), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for \_\_\_\_\_

Project ID: PVC341-M, Historic Richmond Town Utilities Upgrade, Borough of Staten Island

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.



BID BOND 2

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to him the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the 11th day of September, 2014.

(Seal)

JRCruz Corp.

(L.S.)

Principal

By:

Evaristo Cruz, Jr., P.E., President

(Seal)

Liberty Mutual Insurance Company

Surety

By:


Lisa Nosal, Atty-In-Fact



BID BOND 3

ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of New Jersey County of Monmouth ss:  
On this 11th day of September, 2014, before me personally came  
Evaristo Cruz, Jr. to me known, who, being by me duly sworn, did depose and say that he  
resides at 74 Hickory Lane, Lincroft, NJ 07738  
that he is the President of JRCRUZ Corp.  
the corporation described in and which executed the foregoing instrument; that he knows the seal of said  
corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the  
directors of said corporation, and that he signed his name thereto by like order.

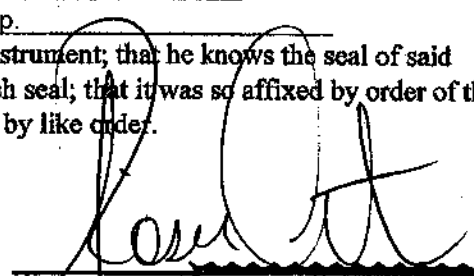

Notary Public **ROSIE CATAO**  
ID # 2221271  
NOTARY PUBLIC  
STATE OF NEW JERSEY  
My Commission Expires Jan 22, 2018

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNER

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:  
On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared  
\_\_\_\_\_ to me known and known to me to be one of the members of the firm of  
\_\_\_\_\_ described in and who executed the foregoing instrument, and he  
acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:  
On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared  
\_\_\_\_\_ to me known and known to me to be the person described in and who  
executed the foregoing instrument and acknowledged that he executed the same.

\_\_\_\_\_  
Notary Public

AFFIX ACKNOWLEDGEMENTS AND JUSTIFICATION OF SURETIES




**THIS PAGE INTENTIONALLY LEFT BLANK**

ACKNOWLEDGEMENT OF SURETY

State of New Jersey ]  
                                  ]-ss  
County of Passaic ]

On 09/11/2014, before me personally came Lisa Nosal to me known, who, being by me duly sworn, did depose and say that she is an attorney-in-fact of Liberty Mutual Insurance Company the corporation described in and which executed the within instrument; that she knows the corporate seal of said corporation, and that the seal affixed to the within instrument is such corporate seal, and that she signed the said instrument and affixed the said seal as Attorney-in-Fact by authority of the Board of Directors of said corporation and by authority of this office under the Standing Resolutions thereof.

My Commission expires:

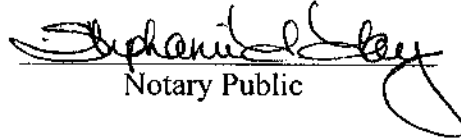  
Notary Public

**STEPHANIE F. FOY**  
NOTARY PUBLIC  
STATE OF NEW JERSEY  
MY COMMISSION EXPIRES OCTOBER 27, 2018



**THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.**

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Certificate No. 6644767

American Fire and Casualty Company  
The Ohio Casualty Insurance Company

Liberty Mutual Insurance Company  
West American Insurance Company

**POWER OF ATTORNEY**

KNOWN ALL PERSONS BY THESE PRESENTS: That American Fire & Casualty Company and The Ohio Casualty Insurance Company are corporations duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Joseph W. Mallory; Lisa Nosal; Louis A. Vlahakes; Pamela J. Boyle; Robert E. Culnen

all of the city of Totowa, state of NJ each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 15th day of July 2014




American Fire and Casualty Company  
The Ohio Casualty Insurance Company  
Liberty Mutual Insurance Company  
West American Insurance Company

By: David M. Carey  
David M. Carey, Assistant Secretary

STATE OF PENNSYLVANIA ss  
COUNTY OF MONTGOMERY

On this 15th day of July, 2014, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of American Fire and Casualty Company, Liberty Mutual Insurance Company, The Ohio Casualty Insurance Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written.



COMMONWEALTH OF PENNSYLVANIA  
Notarial Seal  
Teresa Pastella, Notary Public  
Plymouth Twp., Montgomery County  
My Commission Expires March 26, 2017  
Member, Pennsylvania Association of Notaries

By: Teresa Pastella  
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of American Fire and Casualty Company, The Ohio Casualty insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

**ARTICLE IV - OFFICERS - Section 12. Power of Attorney.** Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

**ARTICLE XIII - Execution of Contracts - SECTION 5. Surety Bonds and Undertakings.** Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

**Certificate of Designation -** The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

**Authorization -** By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Gregory W. Davenport, the undersigned, Assistant Secretary, of American Fire and Casualty Company, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 11th day of September, 2014



By: Gregory W. Davenport  
Gregory W. Davenport, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate, residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.





LIBERTY MUTUAL INSURANCE COMPANY  
 FINANCIAL STATEMENT — DECEMBER 31, 2013

Assets		Liabilities	
Cash and Bank Deposits.....	\$1,118,180,550	Unearned Premiums.....	\$5,940,431,054
*Bonds — U.S. Government.....	1,888,225,943	Reserve for Claims and Claims Expense.....	17,305,063,560
*Other Bonds.....	12,039,490,815	Funds Held Under Reinsurance Treaties.....	212,659,311
*Stocks.....	9,030,962,112	Reserve for Dividends to Policyholders.....	1,226,236
Real Estate.....	251,301,907	Additional Statutory Reserve.....	63,348,980
Agents' Balances or Uncollected Premiums.....	4,781,042,931	Reserve for Commissions, Taxes and	
Accrued Interest and Rents.....	149,855,386	Other Liabilities.....	<u>5,826,683,629</u>
Other Admitted Assets.....	<u>15,216,749,451</u>	<b>Total.....</b>	<b><u>\$29,349,412,770</u></b>
<b>Total Admitted Assets.....</b>	<b><u>\$44,475,809,095</u></b>	Special Surplus Funds.....	\$55,686,852
		Capital Stock.....	11,250,000
		Paid in Surplus.....	7,898,288,167
		Unassigned Surplus.....	7,161,171,306
		<b>Surplus to Policyholders.....</b>	<b><u>15,126,396,325</u></b>
		<b>Total Liabilities and Surplus.....</b>	<b><u>\$44,475,809,095</u></b>



\* Bonds are stated at amortized or investment value; Stocks at Association Market Values.  
 The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2013, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 20th day of March, 2014.

*T. Mikolajewski*

Assistant Secretary



Tax ID #: 22-3373796

APT E-  
PIN#: 85014B0165

Contract # 1 - General Construction Work

### SCHEDULE B - M/WBE Utilization Plan

#### Part I: M/WBE Participation Goals

Part I to be completed by contracting agency

#### Contract Overview

APT E-Pin #	<u>85014B0165</u>	FMS Project ID#:	<u>PVC341-M</u>
Project Title/Agency	<u>Historic Richmond Town Utilities Upgrade</u>		
PIN #	<u>8502014PV0026C</u>		
Bid/Proposal Response Date:	<u>THURSDAY, SEPTEMBER 11, 2014</u>		
Contracting Agency	<u>Department of Design and Construction</u>		
Agency Address	<u>30-30 Thomson Avenue</u>	City	<u>Long Island City</u> State <u>NY</u> Zip Code <u>11101</u>
Contact Person	<u>Norma Negrón</u>	Title	<u>MWBE Liaison &amp; Compliance Analyst</u>
Telephone #	<u>(718) 391-1502</u>	Email	<u>negronn@ddc.nyc.gov</u>

#### Project Description (attach additional pages if necessary)

The scope of this project involves repaving the streets at the center of Historic Richmond Town: Center Street, Tysen Court, and Court Place, which are all in a state of disrepair. In addition to resurfacing these roads, the scope of work also includes new street lighting, and below grade infrastructure upgrades including electrical, telephone and cable services, as well as water and sewer work.

#### M/WBE Participation Goals for Services

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services.

Prime Contract Industry: Construction

Group	Percentage	
<u>Unspecified *</u>	<u>30</u>	<u>%</u>
or		
<u>Black American</u>	<u>Unspecified</u>	<u>%</u>
<u>Hispanic American</u>	<u>Unspecified</u>	<u>%</u>
<u>Asian American</u>	<u>Unspecified</u>	<u>%</u>
<u>Women</u>	<u>Unspecified</u>	<u>%</u>
<b>Total Participation Goals</b>	<b>30</b>	<b>%</b>

Line 1

\* Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.



**THIS PAGE INTENTIONALLY LEFT BLANK**

**Section III: M/WBE Utilization Plan: How Proposer/Bidder Will Fulfill M/WBE Participation Goals. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation. Check applicable box. The Proposer or Bidder will fulfill the M/WBE Participation Goals:**

- As an M/WBE Prime Contractor that will self-perform and/or subcontract to other M/WBE firms a portion of the contract the value of which is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non-M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals. Please check all that apply to Prime Contractor:  
 MBE       WBE
- As a Qualified Joint Venture with an M/WBE partner, in which the value of the M/WBE partner's participation and/or the value of any work subcontracted to other M/WBE firms is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals.
- As a non M/WBE Prime Contractor that will enter into subcontracts with M/WBE firms the value of which is at least the amount located on Lines 2 or 3 above, as applicable.

**Section IV: General Contract Information**

What is the expected percentage of the total contract dollar value that you expect to award in subcontracts for services, regardless of M/WBE status? % 30

✓ **Scopes of Subcontract Work**



**Section V: Vendor Certification and Required Affirmations**

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth herein and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York (Section 6-129), and the rules promulgated thereunder.
- 2) affirm that the information supplied in support of this M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms

Signature [Signature]  
Print Name Evaristo Cruz, Jr.

Date September 11, 2014  
Title President

Tax ID #: 22-3373796

APT E-

PIN#: 85014B0165

**SCHEDULE B - Part II: M/WBE Participation Plan**

Part II to be completed by the bidder/proposer:

Please note: For Non-M/WBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 9 and 9a and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

Section I: Prime Contractor Contact Information			
Tax ID #	<u>22-3373796</u>	FMS Vendor ID #	<u>0002175332</u>
Business Name	<u>JRCRUZ Corp.</u>	Contact Person	<u>Evaristo Cruz, Jr.</u>
Address	<u>675 Line Road, Aberdeen, NJ 07747</u>		
Telephone #	<u>732-290-0700</u>	Email	<u>ecruz@jrcruz.com</u>

**Section II: M/WBE Utilization Goal Calculation. Check the applicable box and complete subsection.**

PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS			
<input checked="" type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Agency M/WBE Participation Goals.	Total Bid/Proposal Value	Agency Total Participation Goals (Line 1, Page 6)	Calculated M/WBE Participation Amount
<p>Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture.</p> <p>Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.</p>	8,803,400	30%	2,641,020
	\$	X	= \$ Line 2

PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS			
<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Modified M/WBE Participation Goals.	Total Bid/Proposal Value	Adjusted Participation Goal (From Partial Waiver)	Calculated M/WBE Participation Amount
<p>Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture.</p> <p>Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.</p>			
	\$	X	= \$ Line 3

**SCHEDULE B - PART III - REQUEST FOR WAIVER OF M/WBE PARTICIPATION REQUIREMENT**

**Contract Overview**

Tax ID # \_\_\_\_\_ FMS Vendor ID # \_\_\_\_\_  
 Business Name \_\_\_\_\_  
 Contact Name \_\_\_\_\_ Telephone # \_\_\_\_\_ Email \_\_\_\_\_  
 Type of Procurement  Competitive Sealed Bids  Other Bid/Response Due Date \_\_\_\_\_

APR EBNY (for this procurement) \_\_\_\_\_ Contracting Agency \_\_\_\_\_

**M/WBE Participation Goals as described in bid/solicitation documents**

\_\_\_\_\_ % Agency M/WBE Participation Goal

**Proposed M/WBE Participation Goal as anticipated by vendor seeking waiver**

\_\_\_\_\_ % of the total contract value anticipated in good faith by the bidder/proposer to be subcontracted for services and/or credited to an M/WBE Prime Contractor or Qualified Joint Venture.

**Basis for Waiver Request: Check appropriate box & explain in detail below (attach additional pages if needed)**

- Vendor does not subcontract services, and has the capacity and good faith intention to perform all such work itself with its own employees.
- Vendor subcontracts some of this type of work but at a lower % than bid/solicitation describes, and has the capacity and good faith intention to do so on this contract. (Attach subcontracting plan outlining services that the vendor will self-perform and subcontract to other vendors or consultants.)
- Vendor has other legitimate business reasons for proposing the M/WBE Participation Goal above. Explain under separate cover.

**References**

List 3 most recent contracts performed for M/WBE (include any) include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.  
 (Complete only if vendor has performed fewer than 3 New York City contracts.)

<b>TYPE OF Contract</b> _____	<b>ENTITY</b> _____	<b>DATE COMPLETED</b> _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
<b>Total Contract Amount \$</b> _____	<b>Total Amount Subcontracted \$</b> _____	
<b>Type of Work Subcontracted</b> _____	_____	_____

<b>TYPE OF Contract</b> _____	<b>AGENCY/ENTITY</b> _____	<b>DATE COMPLETED</b> _____
Manager at agency/entity that hired vendor (Name/Phone No./Email) _____		
<b>Total Contract Amount \$</b> _____	<b>Total Amount Subcontracted \$</b> _____	
<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____

<b>TYPE OF Contract</b> _____	<b>AGENCY/ENTITY</b> _____	<b>DATE COMPLETED</b> _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
<b>Total Contract Amount \$</b> _____	<b>Total Amount Subcontracted \$</b> _____	
<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____

**VENDOR CERTIFICATION:** I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

**Signature:** \_\_\_\_\_ **Date:** \_\_\_\_\_  
**Print Name:** \_\_\_\_\_ **Title:** \_\_\_\_\_

Shaded area below is for agency completion only

# Certificate of No Change Form



- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges.

I, David S. Cruz, being duly sworn, state that I have read  
*Enter Your Name*

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

## Vendor Questionnaire *This section is required.*

*This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.*

Name of Submitting Entity: JRCRUZ Corp.

Vendor's Address: 675 Line Road, Aberdeen, NJ 07747

Vendor's EIN or TIN: 22-3373796 Requesting Agency: NYC DDC

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed for the submitting vendor: 3/19/14

Signature date on change submission for the submitting vendor: \_\_\_\_\_



# Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



	Principal Name:	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change:
1	Evaristo Cruz, Jr.	3/19/14	
2	David S. Cruz	3/19/14	
3	Matthew J. Cruz	3/19/14	
4			
5			
6			

Check if additional changes were submitted and attach a document with the date of additional submissions.

## Certification ~~This section is required.~~

~~This form must be signed and notarized. Please complete this twice. Copies will not be accepted.~~

Certified By:

David S. Cruz

Name (Print)

Vice President

Title

JRCRUZ Corp.

Name of Submitting Entity

Signature

January 23, 2015

Date

Notarized By:

Notary Public

Monmouth


County License Issued

2221271

License Number

Sworn to before me on: January 23, 2015

Date







## SAFETY QUESTIONNAIRE

The bidder must include, with its bid, all information requested on this Safety Questionnaire. Failure to provide a completed and signed Safety Questionnaire at the time of bid opening may result in disqualification of the bid as non-responsive.

**1. Bidder Information:**

Company Name: JRCRUZ Corp.

DDC Project Number: PVC341-M

Company Size:            Ten (10) employees or less  
  x   Greater than ten (10) employees

Company has previously worked for DDC   x   YES            NO

**2. Type(s) of Construction Work**

TYPE OF WORK	LAST 3 YEARS	THIS PROJECT
General Building Construction	_____	_____
Residential Building Construction	_____	_____
Nonresidential Building Construction	_____	_____
Heavy Construction, except building	x	x
Highway and Street Construction	x	x
Heavy Construction, except highways	_____	_____
Plumbing, Heating, HVAC	_____	_____
Painting and Paper Hanging	_____	_____
Electrical Work	_____	_____
Masonry, Stonework and Plastering	_____	_____
Carpentry and Floor Work	_____	_____
Roofing, Siding, and Sheet Metal	_____	_____
Concrete Work	x	x
Specialty Trade Contracting	_____	_____
Asbestos Abatement	_____	_____
Other (specify)	_____	_____
BMP WORK	x	x

**3. Experience Modification Rate:**

The Experience Modification Rate (EMR) is a rating generated by the National Council of Compensation Insurance (NCCI). This rating is used to determine the contractor's premium for worker's compensation insurance. The contractor may obtain its EMR by contacting its insurance broker or the NCCI. If the contractor cannot obtain its EMR, it must submit a written explanation as to why.

The Contractor must indicate its Intrastate and Interstate EMR for the past three years. [Note: For contractors with less than three years of experience, the EMR will be considered to be 1.00].

YEAR	INTRASTATE RATE	INTERSTATE RATE
2011	1.0	1.0
2012	1.0	1.0
2013	.9	.9

If the Intrastate and/or Interstate EMR for any of the past three years is greater than 1.00, the contractor must attach, to this questionnaire, a written explanation for the rating and identify what corrective action was taken to correct the situation resulting in that rating.

**4. OSHA Information:**

YES  NO Contractor has received a willful violation issued by OSHA or New York City Department of Buildings (NYCDOB) within the last three years.

YES  NO Contractor has had an incident requiring OSHA notification within 8 hours (i.e., fatality, or hospitalization of three or more employees).

The Occupational Safety and Health Act (OSHA) of 1970 requires employers with ten or more employees, on a yearly basis to complete and maintain on file the form entitled "Log of Work-related Injuries and Illnesses". This form is commonly referred to as the OSHA 300 Log (OSHA 200 Log for 2001 and earlier).

The OSHA 300 Log must be submitted for the last three years for contractors with more than ten employees.

The Contractor must indicate the total number of hours worked by its employees, as reflected in payroll records for the past three years.

The contractor must submit the Incident Rate for Lost Time Injuries (the Incident Rate) for the past three years. The Incident Rate is calculated in accordance with the formula set forth below. For each given year, the total number of incidents is the total number of non-fatal injuries and illnesses reported on the OSHA 300 Log. The 200,000 hours represents the equivalent of 100 employees working forty hours a week, fifty weeks per year.

$$\text{Incident Rate} = \frac{\text{Total Number of Incidents} \times 200,000}{\text{Total Number of Hours Worked by Employees}}$$

YEAR	TOTAL NUMBERS OF HOURS WORKED BY EMPLOYEES	INCIDENT RATE
2011	92,097	2.17
2012	79,717	5.02
2013	76,598	2.60

If the contractor's Incident Rate for any of the past three years is one point higher than the Incident Rate for the type of construction it performs (listed below), the contractor must attach, to this questionnaire, a written explanation for the relatively high rate.

General Building Construction	8.5
Residential Building Construction	7.0
Nonresidential Building Construction	10.2
Heavy Construction, except building	8.7
Highway and Street Construction	9.7
Heavy Construction, except highways	8.3
Plumbing, Heating, HVAC	11.3
Painting and Paper Hanging	6.9
Electrical Work	9.5
Masonry, Stonework and Plastering	10.5
Carpentry and Floor Work	12.2
Roofing, Siding, and Sheet Metal	10.3
Concrete Work	8.6
Specialty Trade Contracting	8.6

**5. Safety Performance on Previous DDC Project(s)**

YES  NO Contractor previously audited by the DDC Office of Site Safety.

DDC Project Number(s): SE-774, SER200187

YES  NO Accident on previous DDC Project(s).

DDC Project Number(s): SE801, SER777R, HD153C2

YES  NO Fatality or Life-altering Injury on DDC Project(s) within the last three years. [Examples of a life-altering injury include loss of limb, loss of a sense (e.g., sight, hearing), or loss of neurological function].

DDC Project Number(s): \_\_\_\_\_

Date: September 11, 2014

By:   
(Signature of Owner, Partner, Corporate Officer)

Title: Evaristo Cruz, Jr., President

(NO TEXT ON THIS PAGE)

The City of New York Department of Small Business Services  
Division of Labor Services Contract Compliance Unit  
110 William Street, New York, New York 10038  
Phone: (212) 513 - 6323  
Fax: (212) 618-8879

**CONSTRUCTION EMPLOYMENT REPORT**

**GENERAL INFORMATION**

1. Your contractual relationship in this contract is: Prime contractor  Subcontractor
- 1a. Are M/WBE goals attached to this project? Yes  No
2. Please check one of the following if your firm would like information on how to certify with the City of New York as a:
- Minority Owned Business Enterprise  Locally Based Business Enterprise  
 Women Owned Business Enterprise  Emerging Business Enterprise  
 Disadvantaged Business Enterprise
- 2a. If you are certified as an MBE, WBE, LBE, EBE or DBE, what city/state agency are you certified with? \_\_\_\_\_ Are you DBE certified? Yes  No
3. Please indicate if you would like assistance from SBS in identifying certified M/WBEs for contracting opportunities: Yes  No
4. Is this project subject to a project labor agreement? Yes  No
5. Are you a Union contractor? Yes  No  If yes, please list which local(s) you affiliated with Operating Engineers Local 14, 15, Laborers Local 731, 1010, Dockbuilders Local 1556 Timbermen Local 1536.
6. Are you a Veteran owned company? Yes  No

**PART I: CONTRACTOR/SUBCONTRACTOR INFORMATION**

7. 22-3373796 engineering@jrcruz.com  
Employer Identification Number or Federal Tax I.D. Email Address
8. JRCRUZ Corp.  
Company Name
9. 675 Line Road, Aberdeen, NJ 07747  
Company Address and Zip Code
10. Evaristo Cruz, Jr., P.E. 732-290-0700  
Chief Operating Officer Telephone Number
- Same  
Designated Equal Opportunity Compliance Officer Telephone Number  
(same as Item #10, write "same")
- \_\_\_\_\_  
Contractor and Contact Person  
(same as Item #8, write "same")

13. Number of employees in your company: 50 +/-

14. Contract information:

(a) NYC DDC (b) \_\_\_\_\_  
Contracting Agency (City Agency) Contract Amount

(c) \_\_\_\_\_ (d) \_\_\_\_\_  
Procurement Identification Number (PIN) Contract Registration Number (CT#)

(e) \_\_\_\_\_ (f) \_\_\_\_\_  
Projected Commencement Date Projected Completion Date

(g) Description and location of proposed contract:  
Historic Richmond Town Utilities Upgrade. Borough of Staten Island.

15. Has your firm been reviewed by the Division of Labor Services (DLS) within the past 36 months and issued a Certificate of Approval? Yes X No \_\_\_

If yes, attach a copy of certificate.

16. Has DLS within the past month reviewed an Employment Report submission for your company and issued a Conditional Certificate of Approval? Yes \_\_\_ No X

If yes, attach a copy of certificate.

**NOTE: DLS WILL NOT ISSUE A CONTINUED CERTIFICATE OF APPROVAL IN CONNECTION WITH THIS CONTRACT UNLESS THE REQUIRED CORRECTIVE ACTIONS IN PRIOR CONDITIONAL CERTIFICATES OF APPROVAL HAVE BEEN TAKEN.**

17. Has an Employment Report already been submitted for a different contract (not covered by this Employment Report) for which you have not yet received compliance certificate? Yes \_\_\_ No X If yes,

Date submitted: \_\_\_\_\_  
Agency to which submitted: \_\_\_\_\_  
Name of Agency Person: \_\_\_\_\_  
Contract No: \_\_\_\_\_  
Telephone: \_\_\_\_\_

18. Has your company in the past 36 months been audited by the United States Department of Labor, Office of Federal Contract Compliance Programs (OFCCP)? Yes \_\_\_ No X

If yes,

(a) Name and address of OFCCP office.

\_\_\_\_\_  
\_\_\_\_\_

(b) Was a Certificate of Equal Employment Compliance issued within the past 36 months?  
Yes X No \_\_\_

If yes, attach a copy of such certificate.

(c) Were any corrective actions required or agreed to? Yes \_\_\_ No X

If yes, attach a copy of such requirements or agreements.

(d) Were any deficiencies found? Yes \_\_\_ No X

If yes, attach a copy of such findings.

19. Is your company or its affiliates a member or members of an employers' trade association which is responsible for negotiating collective bargaining agreements (CBA) which affect construction site hiring? Yes X No \_\_\_ GCA

If yes, attach a list of such associations and all applicable CBA's.

## PART II: DOCUMENTS REQUIRED

20. For the following policies or practices, attach the relevant documents (e.g., printed booklets, brochures, manuals, memoranda, etc.). If the policy(ies) are unwritten, attach a full explanation of the practices. See instructions.

Y (a) Health benefit coverage/description(s) for all management, nonunion and union employees (whether company or union administered)

Y (b) Disability, life, other insurance coverage/description

N (c) Employee Policy/Handbook

N (d) Personnel Policy/Manual

N (e) Supervisor's Policy/Manual

Y (f) Pension plan or 401k coverage/description for all management, nonunion and union employees, whether company or union administered

Y (g) Collective bargaining agreement(s).

Y (h) Employment Application(s)

N (i) Employee evaluation policy/form(s).

Y (j) Does your firm have medical and/or non-medical (i.e. education, military, personal, pregnancy, child care) leave policy?



21. To comply with the Immigration Reform and Control Act of 1986 when and of whom does your firm require the completion of an I-9 Form?

- |  |     |          |    |          |
|--|-----|----------|----|----------|
| (a) Prior to job offer                     | Yes | ___      | No | <u>X</u> |
| (b) After a conditional job offer          | Yes | ___      | No | <u>X</u> |
| (c) After a job offer                      | Yes | <u>X</u> | No | ___      |
| (d) Within the first three days on the job | Yes | <u>X</u> | No | ___      |
| (e) To some applicants                     | Yes | ___      | No | <u>X</u> |
| (f) To all applicants                      | Yes | <u>X</u> | No | ___      |
| (g) To some employees                      | Yes | ___      | No | <u>X</u> |
| (h) To all employees                       | Yes | <u>X</u> | No | ___      |

22. Explain where and how completed I-9 Forms, with their supportive documentation, are maintained and made accessible.

Completed at the Field Office, witnessed and signed by President of the Corporation  
Filed in the Main Office.

23. Does your firm or any of its collective bargaining agreements require job applicants to take a medical examination? Yes \_\_\_ No X

If yes, is the medical examination given:

- |                                   |     |     |    |     |
|-----------------------------------|-----|-----|----|-----|
| (a) Prior to a job offer          | Yes | ___ | No | ___ |
| (b) After a conditional job offer | Yes | ___ | No | ___ |
| (c) After a job offer             | Yes | ___ | No | ___ |
| (d) To all applicants             | Yes | ___ | No | ___ |
| (e) Only to some applicants       | Yes | ___ | No | ___ |

If yes, list for which applicants below and attach copies of all medical examination or questionnaire forms and instructions utilized for these examinations.

\_\_\_\_\_

24. Do you have a written equal employment opportunity (EEO) policy? Yes X No \_\_\_

If yes, list the document(s) and page number(s) where these written policies are located.

Equal Employment and Affirmative Action. Page 1 Plan and Statements Policies.  
Section B Equal Employment.

25. Does the company have a current affirmative action plan(s) (AAP)

- X Minorities and Women  
X Individuals with handicaps  
\_\_\_ Other. Please specify \_\_\_\_\_

26. Does your firm or collective bargaining agreement(s) have an internal grievance procedure with respect to EEO complaints? Yes X No \_\_\_

If yes, please attach a copy of this policy.

If no, attach a report detailing your firm's unwritten procedure for handling EEO complaints.

27. Has any employee, within the past three years, filed a complaint pursuant to an internal grievance procedure or with any official of your firm with respect to equal employment opportunity? Yes \_\_\_ No X

If yes, attach an internal complaint log. See instructions.

28. Has your firm, within the past three years, been named as a defendant (or respondent) in any administrative or judicial action where the complainant (plaintiff) alleged violation of any anti-discrimination or affirmative action laws? Yes \_\_\_ No X

If yes, attach a log. See instructions.

29. Are there any jobs for which there are physical qualifications? Yes \_\_\_ No X

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

---

---

30. Are there any jobs for which there are age, race, color, national origin, sex, creed, disability, marital status, sexual orientation, or citizenship qualifications? Yes \_\_\_ No X

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

---

---

**SIGNATURE PAGE**

I, (print name of authorized official signing) Evaristo Cruz, Jr., P.E. hereby certify that the information submitted herewith is true and complete to the best of my knowledge and belief and submitted with the understanding that compliance with New York City's equal employment requirements, as contained in Chapter 56 of the City Charter, Executive Order No. 50 (1980), as amended, and the implementing Rules and Regulations, is a contractual obligation. I also agree on behalf of the company to submit a certified copy of payroll records to the Division of Labor Services on a monthly basis.

JRCRUZ Corp.

Contractor's Name

Rosie Catao

Payroll Department

Name of person who prepared this Employment Report

Title

Evaristo Cruz, Jr., P.E.

President

Name of official authorized to sign on behalf of the contractor

Title

732-290-0700

Telephone Number

September 11, 2014

Signature of authorized official

Date

If contractors are found to be underutilizing minorities and females in any given trade based on Chapter 56 Section 3H, the Division of Labor Services reserves the right to request the contractor's workforce data and to implement an employment program.

Contractors who fail to comply with the above mentioned requirements or are found to be in noncompliance may be subject to the withholding of final payment.

Willful or fraudulent falsifications of any data or information submitted herewith may result in the termination of the contract between the City and the bidder or contractor and in disapproval of future contracts for a period of up to five years. Further, such falsification may result in civil and/or criminal prosecution.

To the extent permitted by law and consistent with the proper discharge of DLS' responsibilities under Charter Chapter 56 of the City Charter and Executive Order No. 50 (1980) and the implementing Rules and Regulations, all information provided by a contractor to DLS shall be confidential.

**Only original signatures accepted.**


Sworn to before me this 11th day of September 20 14

Notary Public

Authorized Signature

September 11, 2014

Date



**FORM A CONTRACT BID INFORMATION: USE OF SUBCONTRACTORS/TRADES**

1. Do you plan to subcontractor work on this contract? Yes \_\_\_ No \_\_\_
2. If yes, complete the chart below.

**NOTE: All proposed subcontractors with a subcontract in excess of \$750,000 must complete an Employment Report for review and approval before the contract may be awarded and work commences.**

SUBCONTRACTOR'S NAME*	OWNERSHIP (ENTER APPROPRIATE CODE LETTERS BELOW)	WORK TO BE PERFORMED BY SUBCONTRACTOR	TRADE PROJECTED FOR USE BY SUBCONTRACTOR	PROJECTED DOLLAR VALUE OF SUBCONTRACT
NOT KNOWN AT THIS TIME				

\*If subcontractor is presently unknown, please enter the trade (craft name).

**OWNERSHIP CODES**

- W: White
- B: Black
- H: Hispanic
- A: Asian
- N: Native American
- F: Female

**FORM B: PROJECTED WORKFORCE**

**TRADE CLASSIFICATION CODES**

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice
- (TRN) Trainee

For each trade to be engaged by your company for this project, enter the projected workforce for Males and Females by trade classification on the charts below.

Trade: Laborers Local 731

Union Affiliation, if applicable  
731

Total (Col. #1-10):  
8

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):  
2

Total Female  
(Col. #6 - 10):  
0

	MALES					FEMALES				
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.
J	6		2							
H										
A										
TRN										
TOT	6		2							

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?  
Unions and Community Outreach.

**FORM B: PROJECTED WORKFORCE**

Trade: Operating Engineers

Union Affiliation, if applicable  
I 4 & 1.5

Total (Col. #1-10):  
4

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):

Total Female  
(Col. #6 - 10):

	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J	4									
H										
A										
TRN										
TOT	4									

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Unions and Community Outreach.

**FORM B: PROJECTED WORKFORCE**

Trade: Timbermen

Union Affiliation, if applicable

1456

Total (Col. #1-10):

2

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):

1

Total Female  
(Col. #6 - 10):

	MALES					FEMALES				
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.
J	1		1							
H										
A										
TRN										
TOT										

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?  
 Unions and Community Outreach

**FORM C: CURRENT WORKFORCE**

**TRADE CLASSIFICATION CODES**

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice
- (TRN) Trainee

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade:	MALES					FEMALES											
	(1) White Non-Hisp.		(2) Black Non-Hisp.		(3) Hisp.	(4) Asian		(5) Native Amer.	(6) White Non-Hisp.		(7) Black Non-Hisp.		(8) Hisp.	(9) Asian		(10) Native Amer.	
Carpenter/Timbermen	1				2												
Union Affiliation, if applicable																	
1456																	
Total (Col. #1-10):	3																
Total Minority, Male & Female (Col. #2,3,4,5,7,8,9, & 10):																	
2																	
Total Female (Col. #6 - 10):																	
TRN																	
TOT	1				2												

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Unions and Community Outreach.



**FORM C: CURRENT WORKFORCE**

**TRADE CLASSIFICATION CODES**

- (J) Journeylevel Workers
- (H) Helper
- (A) Apprentice
- (TRN) Trainee
- (TOT) Total by Column

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade: Laborers	MALES					FEMALES				
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hisp.	Asian	Native Amer.
J	15		2							
H										
A										
TRN										
TOT	15		2							

J  
H  
A  
TRN  
TOT

Union Affiliation, if applicable  
731 & 1010

Total (Col. #1-10):  
17

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):  
2

Total Female  
(Col. #6 - 10):

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Unions and Community Outreach

**FORM C: CURRENT WORKFORCE**

Trade: \_\_\_\_\_

Operators

Union Affiliation, if applicable  
14 & 15 \_\_\_\_\_

Total (Col. #1-10):  
12

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10): \_\_\_\_\_

Total Female  
(Col. #6 -- 10): \_\_\_\_\_

**MALES**

**FEMALES**

	(1) White		(2) Black		(3) Hisp.		(4) Asian		(5) Native Amer.		(6) White		(7) Black		(8) Hisp.		(9) Asian		(10) Native Amer.		
	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	Non	Hisp.	
J																					
H																					
A																					
TRN																					
TOT		12																			

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Unions and Community Outreach



## IRAN DIVESTMENT ACT COMPLIANCE RIDER

### FOR NEW YORK CITY CONTRACTORS

The Iran Divestment Act of 2012, effective as of April 12, 2012, is codified at State Finance Law ("SFL") §165-a and General Municipal Law ("GML") §103-g. The Iran Divestment Act, with certain exceptions, prohibits municipalities, including the City, from entering into contracts with persons engaged in investment activities in the energy sector of Iran. Pursuant to the terms set forth in SFL §165-a and GML §103-g, a person engages in investment activities in the energy sector of Iran if:

- (a) The person provides goods or services of twenty million dollars or more in the energy sector of Iran, including a person that provides oil or liquefied natural gas tankers, or products used to construct or maintain pipelines used to transport oil or liquefied natural gas, for the energy sector of Iran; or
- (b) The person is a financial institution that extends twenty million dollars or more in credit to another person, for forty-five days or more, if that person will use the credit to provide goods or services in the energy sector in Iran and is identified on a list created pursuant to paragraph (b) of subdivision three of Section 165-a of the State Finance Law and maintained by the Commissioner of the Office of General Services.

A bid or proposal shall not be considered for award nor shall any award be made where the bidder or proposer fails to submit a signed and verified bidder's certification.

Each bidder or proposer must certify that it is not on the list of entities engaged in investment activities in Iran created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. In any case where the bidder or proposer cannot certify that they are not on such list, the bidder or proposer shall so state and shall furnish with the bid or proposal a signed statement which sets forth in detail the reasons why such statement cannot be made. The City of New York may award a bid to a bidder who cannot make the certification on a case by case basis if:

- (1) The investment activities in Iran were made before the effective date of this section (i.e., April 12, 2012), the investment activities in Iran have not been expanded or renewed after the effective date of this section and the person has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran; or
- (2) The City makes a determination that the goods or services are necessary for the City to perform its functions and that, absent such an exemption, the City would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

**BIDDER'S CERTIFICATION OF COMPLIANCE WITH  
IRAN DIVESTMENT ACT**

Pursuant to General Municipal Law §103-g, which generally prohibits the City from entering into contracts with persons engaged in investment activities in the energy sector of Iran, the bidder/proposer submits the following certification:


*[Please Check One]*

**BIDDER'S CERTIFICATION**

By submission of this bid or proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief, that each bidder/proposer is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law.

I am unable to certify that my name and the name of the bidder/proposer does not appear on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. I have attached a signed statement setting forth in detail why I cannot so certify.

Dated: Aberdeen, New ~~York~~ Jersey  
September 11, 20 14

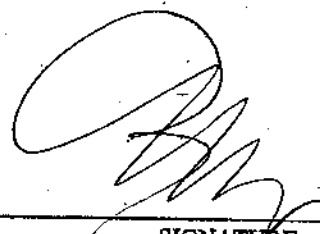

\_\_\_\_\_  
SIGNATURE

Evaristo Cruz, Jr.

\_\_\_\_\_  
PRINTED NAME

President


\_\_\_\_\_  
TITLE

Sworn to before me this  
11th day of Sep, 2014



\_\_\_\_\_  
Notary Public

Dated: September 11, 2014



NYC AGENCY RENOVATION & REHAB CITY OWNED BUILDINGS/STRUCTURES

Project Labor Agreement -- Letter of Assent

Dear:

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as SR CRUZ CORP and located at 625 LINE ROAD (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto;
- (2) Agrees to be bound by the legally established collective bargaining agreements and local trust agreements as set forth in the Project Labor Agreement and this Agreement but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Dated: 10.17.2014

SR CRUZ CORP  
(Name of Contractor or subcontractor)

SR CRUZ CORP.  
(Name of CM; GC; Contractor or Higher Level Subcontractor)

[Signature]  
(Authorized Officer & Title)

625 LINE ROAD, ABERDEEN NJ 09741  
(Address)

(932) 290-0700 fax - 8960  
(Phone) (Fax)

Contractor's State License # \_\_\_\_\_



Sworn to before me on the 12 day of October, 2014

[Signature]  
Notary Public

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

August 5, 2014

**ADDENDUM No. # 4**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:

1. **Please note that, for bidders who obtained drawings from the DDC website prior to and including 8/5/14, these drawings should be discarded in their entirety. An updated set of project drawings will be available on the website as of 8/6/14 and these drawings should be used instead.**

---


**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.



---

David Resnick, R.A.  
Deputy Commissioner

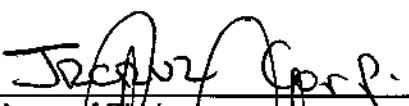

---

Name of Bidder

By: 

---





THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

September 5, 2014

**ADDENDUM No. # 5**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Museum Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:


**1. Questions from Bidders and Responses to Questions:**


See Attachment A.

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.

  
\_\_\_\_\_  
Dr. Feniosky Peña-Mora  
Commissioner

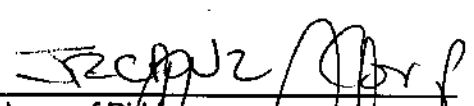  
\_\_\_\_\_  
Name of Bidder

By:   
\_\_\_\_\_



THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

September 11, 2014

**ADDENDUM No. # 6**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Museum Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:

**1. Revised Bid Opening Date:**

The Bid Opening for the Contract described below scheduled for September 11<sup>th</sup>, 2014 at 2:00pm is rescheduled to September 16<sup>th</sup>, 2014 at 2:00pm.

Contract #1 – General Construction Work

**2. Revisions to the Bid Booklet:**

Delete page 21-23 and replace with 21-23R, included with this Addendum.

**3. Questions from Bidders and Responses to Questions:**

See Attachment A.


**4. Revisions to the Drawings:**



See Attachment B.

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.

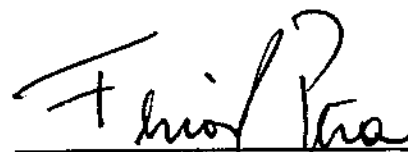  
\_\_\_\_\_  
Dr. Feniosky Peña-Mora  
Commissioner

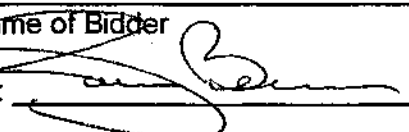  
\_\_\_\_\_  
Name of Bidder  
By:   
\_\_\_\_\_



## **NOTICE TO BIDDERS:**

- **PROJECT LABOR AGREEMENT:** This contract is subject to a Project Labor Agreement (“PLA”) entered into between the City and the Building and Construction Trades Council of Greater New York (“BCTC”) affiliated Local Unions. By submitting a bid, the Contractor agrees that the PLA is binding on the Contractor and all subcontractors of all tiers. The bidder to be awarded the contract will be required to execute a “Letter of Assent” prior to award.

The Bidder is advised to review the following: (1) Notice regarding the PLA, (2) the PLA, and (3) the Letter of Assent, all of which are set forth at the beginning of Volume 2 of the Contract Documents.

- **SINGLE CONTRACT:** As stated above, this contract is subject to a PLA. The requirements of the Wicks Law for separate prime contractors DO NOT APPLY to any project that is covered by a PLA. Accordingly, the requirements of the Wicks Law for separate prime contractors do not apply to this Project. The Project consists of a single contract, the Contract for General Construction Work.

The Bidder is advised to review the Notice set forth at the beginning of Volume 2 of the Contract Documents. The Notice specifies revisions to the Contract Documents to provide that the Project consists of a single contract and to delete any and all references to separate prime contractors.

## **SPECIAL NOTICE TO BIDDERS**

**The New York City Department of Small Business Services (SBS), in conjunction with the New York Business Development Corporation (NYBDC), have established a NYC Construction Loan pilot program to provide prime contractors and subcontractors financing for mobilization costs on certain City construction projects.**

**Under this initiative, loans are available for early stage mobilization needs such as insurance, labor, supplies and equipment. Bidders are strongly encouraged to visit "Growing Your Business" at [www.nyc.gov/nycbusiness](http://www.nyc.gov/nycbusiness) to learn more about the loan or contact [constructionloan@sbs.nyc.gov](mailto:constructionloan@sbs.nyc.gov) / (212) 513-6444 to obtain details and to determine preliminary eligibility.**

**A successful loan applicant will be required to make an assignment of its contract (or subcontract) payments to the lender NYBDC until the loan is repaid. If the loan is to a subcontractor, a prime contractor must honor the terms of such an assignment.**

**A prime contractor may not discriminate against a subcontractor or potential subcontractor by reason of the subcontractor's participation, or nonparticipation, in the NYC Construction Loan program.**

**BID BOOKLET  
PART A**

**THIS PAGE INTENTIONALLY LEFT BLANK**



**PROJECT ID: PVC341-M**

**CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

**BID BOOKLET**

**TABLE OF CONTENTS**

<b>PART A</b>		<b>page</b>
1.	Special Notice to Bidders.....	2
2.	M/WBE Program: M/WBE Utilization Plan.....	5
3.	Bid Form.....	10
4.	Affirmation.....	15
5.	Bidder's Identification of Subcontractors.....	16
6.	Bid Bond.....	18
7.	Bid Schedule .....	21
8.	Attachment 1 - Bid Information.....	22
 <b>PART B</b>		
9.	Safety Questionnaire.....	23
10.	Pre-Award Process .....	26
11.	Project Reference Form.....	28
12.	Contract Certificate.....	31
13.	Confirmation of Vendex Compliance.....	32
14.	Iran Divestment Act Compliance Report.....	33
15.	Construction Employment Report.....	35

**CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

**SPECIAL NOTICE TO BIDDERS**

**BID SUBMISSION REQUIREMENTS**

**THE BID SHALL CONSIST OF TWO (2) SEPARATE, SEALED ENVELOPES. THE DOCUMENTS THAT MUST BE COMPLETED AND INCLUDED IN EACH SEPARATE ENVELOPE ARE LISTED BELOW.**

**BID ENVELOPE #1:** Bid Envelope #1 shall contain the following items:

- Bid Form, including Affirmation
- Bid Security (if required, see page 22)
- Schedule B: M/WBE Utilization Plan (if participation goals have been established)

**BID ENVELOPE #2:** Bid Envelope #2 shall contain **ONLY** the following item:

- Bidder's Identification of Subcontractors (see pages 16 & 17)

**FAILURE TO SUBMIT THE FOUR ITEMS LISTED ABOVE WILL RESULT IN THE DISQUALIFICATION OF THE BID**

**BID ENVELOPE #1:** In addition to the items listed above, Bid Envelope #1 shall also contain the following items: **DO NOT** Include the items listed below in Bid Envelope #2.

- Bid Schedule (if required, see page 21)
- Safety Questionnaire
- Construction Employment Report (if bid is \$1,000,000 or more)
- Contract Certificate (if bid is less than \$1,000,000)
- Confirmation of Vendex Compliance
- Bidder's Certification of Compliance with Iran Divestment Act
- Special Experience Requirements Qualification Form (if required, see pages 3, 4)
- Any Addenda issued prior to the receipt of bids

**FAILURE TO SUBMIT THE EIGHT ITEMS LISTED ABOVE MAY RESULT IN THE DISQUALIFICATION OF THE BID.**

- NOTES:**
- (1) All of the above referred to blank forms to be completed and submitted with the bid are included in the **BID BOOKLET**.
  - (2) If the bidder has any questions or requires additional information, please contact the Department of Design and Construction by phone (718-391-2601) or by fax (718-391-2615).
  - (3) **VENDEX QUESTIONNAIRES:** Vendex Questionnaires, as well as detailed instructions, may be obtained at [www.nyc.gov/vendex](http://www.nyc.gov/vendex). The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.
  - (4) **SPECIAL EXPERIENCE REQUIREMENTS:** The Bidder is advised that Special Experience Requirements may apply to this contract. Such requirements are set forth on pages 3 and 4 of this Bid Booklet.
  - (5) **SPECIAL EXPERIENCE REQUIREMENTS FOR ASBESTOS:** The Bidder is advised that this contract contains strict requirements regarding the prior experience and licensing of the subcontractor who will perform any required asbestos abatement work. These special experience requirements are set forth in the section of the specifications which describes any required asbestos abatement work.

## SPECIAL EXPERIENCE REQUIREMENTS

Bidders are advised that the special experience requirements set forth below apply to the General Construction Contractor if a check mark is indicated before the word "Yes". Compliance with these special experience requirements will be determined solely by the City. Failure to meet these special experience requirements will result in the rejection of the bid as non-responsive.

General Construction Contractor        X      YES      \_\_\_\_\_    NO

- (A) **EXPERIENCE REQUIREMENTS FOR THE BIDDER (PRIME CONTRACTOR):** The special experience requirements set forth below apply to the bidder. Compliance with such special experience requirements will be evaluated at the time of the bid.
- 1) The bidder must, with the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.
- (B) **QUALIFICATION FORM:** For each project submitted to meet the experience requirements set forth above, the bidder must complete and submit with its bid the Qualification Form set forth in this Bid Booklet. All information on the Qualification Form must be provided.
- (C) **CONDITIONS:** The City may, in determining compliance with the special experience requirements set forth above, consider prior projects completed by principal(s) or other employees of the bidder while affiliated with another entity, subject to the conditions set forth below.
- 1) Any principal or other employee on whose prior experience the bidder is relying to demonstrate compliance with this special experience requirement must have held the following: (a) a significant management role in the prior entity with which he/she was affiliated, and (b) a significant management role in the entity submitting the bid for a period of six months or from the inception of the bidding entity.
  - 2) The bidder may not rely on the experience of its principals or other employees to demonstrate compliance with any other requirements, including without limitation, financial requirements or requirements for a specified minimum amount of annual gross revenues.
- (D) **JOINT VENTURES:** In the event the bidder is a joint venture, at least one firm in the joint venture must meet the above described experience requirements.
- (E) **COMPLIANCE:** Compliance with the experience requirements set forth herein will be determined solely by the City. The bidder is advised that failure to meet the above described experience will result in the rejection of the bid as non-responsive.

**THIS PAGE INTENTIONALLY LEFT BLANK**

**Qualification Form**

Project ID: PVC341-M

List previous projects completed to meet the special experience requirements for this contract. Please photocopy this form for submission of all required projects.

Name of Contractor: \_\_\_\_\_

Name of Project: \_\_\_\_\_

Location of Project: \_\_\_\_\_

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: \_\_\_\_\_

Title: \_\_\_\_\_ Phone Number: \_\_\_\_\_

Brief description of work completed: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Was the work performed as a prime or a subcontractor: \_\_\_\_\_

Amount of Contract: \_\_\_\_\_

Date of Completion: \_\_\_\_\_

\*\*\*\*\*

Name of Contractor: \_\_\_\_\_

Name of Project: \_\_\_\_\_

Location of Project: \_\_\_\_\_

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: \_\_\_\_\_

Title: \_\_\_\_\_ Phone Number: \_\_\_\_\_

Brief description of work completed: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Was the work performed as a prime or a subcontractor: \_\_\_\_\_

Amount of Contract: \_\_\_\_\_

Date of Completion: \_\_\_\_\_

**THIS PAGE INTENTIONALLY LEFT BLANK**

## MWBE PROGRAM

### M/WBE UTILIZATION PLAN

**M/WBE Program Requirements:** The requirements for the M/WBE Program are set forth on the following pages of this Bid Booklet, in the section entitled "Notice to All Prospective Contractors".

**Schedule B: M/WBE Utilization Plan:** Schedule B: M/WBE Utilization Plan for this Contract is set forth in this Bid Booklet on the pages following the section entitled "Notice to All Prospective Contractors". The M/WBE Utilization Plan (Part I) indicates whether Participation Goals have been established for this Contract. If Participation Goals have been established for this Contract, the bidder must submit an M/WBE Utilization Plan (Part II) with its bid.

**Waiver:** The bidder may seek a full or partial pre-award waiver of the Participation Goals in accordance with the "Notice to All Prospective Contractors" (See Part A, Section 10). The bidder's request for a waiver must be submitted at least seven (7) calendar days prior to the bid date. Waiver requests submitted after the deadline will not be considered. The form for requesting a waiver of the Participation Goals is set forth in the M/WBE Utilization Plan (Part III).

**Rejection of the Bid:** The bidder must complete Schedule B: M/WBE Utilization Plan (Part II) set forth in this Bid Booklet on the pages following the section entitled "Notice to All Prospective Contractors". A Schedule B submitted by the bidder which does not include the Vendor Certification and Required Affirmations (See Section V of Part II) will be deemed to be non-responsive, unless a full waiver of the Participation Goals is granted (Schedule B, Part III). In the event that the City determines that the bidder has submitted a Schedule B where the Vendor Certification and Required Affirmations are completed but other aspects of the Schedule B are not complete, or contain a copy or computation error that is at odds with the Vendor Certification and Required Affirmations, the bidder will be notified by the Agency and will be given four (4) calendar days from receipt of notification to cure the specified deficiencies and return a completed Schedule B to the Agency. Failure to do so will result in a determination that the Bid is non-responsive.

Receipt of notification is defined as the date notice is emailed or faxed (if the bidder has provided an email address or fax number), or no later than five (5) days from the date of mailing or upon delivery, if delivered.

**Impact on LBE Requirements:** If Participation Goals have been established for the participation of M/WBEs, the contractor is not required to comply with the Locally Based Enterprise Program ("LBE"). The LBE Program is set forth in Article 67 of the Contract.

**THIS PAGE INTENTIONALLY LEFT BLANK**



**NOTICE TO ALL PROSPECTIVE CONTRACTORS**

**PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS  
ENTERPRISES IN CITY PROCUREMENT**

**ARTICLE I. M/WBE PROGRAM**

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority- owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

**If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.**

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

**PART A**

**PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD  
AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS**

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to

determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

**C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.**

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi-year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or**

below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at [www.nyc.gov/buycertified](http://www.nyc.gov/buycertified), by emailing DSBS at [buyer@sbs.nyc.gov](mailto:buyer@sbs.nyc.gov), by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting [www.nyc.gov/getcertified](http://www.nyc.gov/getcertified), emailing [MWBE@sbs.nyc.gov](mailto:MWBE@sbs.nyc.gov), or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's M/WBE Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its M/WBE Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an M/WBE Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at [poped@ddc.nyc.gov](mailto:poped@ddc.nyc.gov) or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the Participation Goals to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the Participation Goals. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. **Modification of M/WBE Utilization Plan.** (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission. The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the Participation Goals. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;
- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

## **PART B: MISCELLANEOUS**

1. The Contractor shall take notice that, if this solicitation requires the establishment of an **M/WBE Utilization Plan**, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE Utilization Plan**.
2. Pursuant to DSBS rules, construction contracts that include a requirement for an **M/WBE Utilization Plan** shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.
3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.
4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).
5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the **M/WBE Program** requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the **M/WBE Program** requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

## **ARTICLE II. ENFORCEMENT**

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.
2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE Utilization Plan**, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.
3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE Utilization Plan**, Agency may determine that one of the following actions should be taken:
  - (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
  - (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
  - (c) making a finding that the Contractor is in default of the Contract;
  - (d) terminating the Contract;
  - (e) declaring the Contractor to be in breach of Contract;
  - (f) withholding payment or reimbursement;
  - (g) determining not to renew the Contract;
  - (h) assessing actual and consequential damages;

- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an M/WBE Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its M/WBE Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its M/WBE Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an M/WBE Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

Tax ID #: \_\_\_\_\_

APT E-  
PIN#: 85014B0165

Contract # 1 - General Construction Work

**SCHEDULE B - M/WBE Utilization Plan**

**Part I: M/WBE Participation Goals**

Part I to be completed by contracting agency

**Contract Overview**

APT E-Pin # 85014B0165 FMS Project ID#: PVC341-M  
 Project Title/Agency Historic Richmond Town Utilities Upgrade  
 PIN # 8502014PV0026C  
 Bid/Proposal  
 Response Date: THURSDAY, SEPTEMBER 11, 2014  
 Contracting Agency Department of Design and Construction  
 Agency Address 30-30 Thomson Avenue City Long Island City State NY Zip Code 11101  
 Contact Person Norma Negrón Title MWBE Liaison & Compliance Analyst  
 Telephone # (718) 391-1502 Email negronn@ddc.nyc.gov

**Project Description** (attach additional pages if necessary)

The scope of this project involves repaving the streets at the center of Historic Richmond Town: Center Street, Tysen Court, and Court Place, which are all in a state of disrepair. In addition to resurfacing these roads, the scope of work also includes new street lighting, and below grade infrastructure upgrades including electrical, telephone and cable services, as well as water and sewer work.

**M/WBE Participation Goals for Services**

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services

Prime Contract Industry: Construction

Group	Percentage	
<u>Unspecified *</u>	<u>30</u>	<u>%</u>
OR		
<u>Black American</u>	<u>Unspecified</u>	<u>%</u>
<u>Hispanic American</u>	<u>Unspecified</u>	<u>%</u>
<u>Asian American</u>	<u>Unspecified</u>	<u>%</u>
<u>Women</u>	<u>Unspecified</u>	<u>%</u>
<b>Total Participation Goals</b>	<b>30</b>	<b>%</b>

Line 1

\* Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.

**THIS PAGE INTENTIONALLY LEFT BLANK**



Tax ID #: \_\_\_\_\_

**SCHEDULE B - Part II: M/WBE Participation Plan**

Part II to be completed by the bidder/proposer:

Please note: For Non-M/WBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 9 and 9a and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

**Section I: Prime Contractor Contact Information**

Tax ID # _____	FMS Vendor ID # _____
Business Name _____	Contact Person _____
Address _____	
Telephone # _____	Email _____

**Section II: M/WBE Utilization Goal Calculation: Check the applicable box and complete subsection.**

**PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS**

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Agency M/WBE Participation Goals.  Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture.  Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	Total Bid/Proposal Value  \$ _____	X	Agency Total Participation Goals (Line 1, Page 6)  _____	=	Calculated M/WBE Participation Amount  \$ _____ Line 2
--	--	---	--	---	---

**PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS**

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Modified M/WBE Participation Goals.  Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture.  Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	Total Bid/Proposal Value  \$ _____	X	Adjusted Participation Goal (From Partial Waiver)  _____	=	Calculated M/WBE Participation Amount  \$ _____ Line 3
--	--	---	--	---	---

**Section III: M/WBE Utilization Plan: How Proposer/Bidder Will Fulfill M/WBE Participation Goals. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation. Check applicable box. The Proposer or Bidder will fulfill the M/WBE Participation Goals:**

- As an M/WBE Prime Contractor that will self-perform and/or subcontract to other M/WBE firms a portion of the contract the value of which is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non-M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals. Please check all that apply to Prime Contractor:  
 MBE       WBE
- As a Qualified Joint Venture with an M/WBE partner, in which the value of the M/WBE partner's participation and/or the value of any work subcontracted to other M/WBE firms is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals.
- As a non M/WBE Prime Contractor that will enter into subcontracts with M/WBE firms the value of which is at least the amount located on Lines 2 or 3 above, as applicable.

**Section IV: General Contract Information**

What is the expected percentage of the total contract dollar value that you expect to award in subcontracts for services, regardless of M/WBE status? % \_\_\_\_\_

*Enter brief description of the type(s) and dollar value of subcontracts for all any services you plan on subcontracting if awarded this contract. For each item, indicate whether the work is designated for participation by MBEs and/or WBEs and the time frame in which such work is scheduled to begin and end. Use additional sheets if necessary.*

✓ **Scopes of Subcontract Work**

1. \_\_\_\_\_
2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_
5. \_\_\_\_\_
6. \_\_\_\_\_
7. \_\_\_\_\_
8. \_\_\_\_\_
9. \_\_\_\_\_
10. \_\_\_\_\_
11. \_\_\_\_\_
12. \_\_\_\_\_
13. \_\_\_\_\_
14. \_\_\_\_\_
15. \_\_\_\_\_
16. \_\_\_\_\_
17. \_\_\_\_\_

**Section V: Vendor Certification and Required Affirmations**

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth herein and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York (Section 6-129), and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of this M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

Signature \_\_\_\_\_  
 Print Name \_\_\_\_\_

Date \_\_\_\_\_  
 Title \_\_\_\_\_

**SCHEDULE B – PART III – REQUEST FOR WAIVER OF M/WBE PARTICIPATION REQUIREMENT**

**Contract Overview**

Tax ID # \_\_\_\_\_ FMS Vendor ID # \_\_\_\_\_  
 Business Name \_\_\_\_\_  
 Contact Name \_\_\_\_\_ Telephone # \_\_\_\_\_ Email \_\_\_\_\_  
 Type of Procurement  Competitive Sealed Bids  Other Bid/Response Due Date \_\_\_\_\_  
 APT E-PIN # (for this procurement): \_\_\_\_\_ Contracting Agency: \_\_\_\_\_

**M/WBE Participation Goals as described in bid/solicitation documents**

\_\_\_\_\_ % Agency M/WBE Participation Goal

**Proposed M/WBE Participation Goal as anticipated by vendor seeking waiver**

\_\_\_\_\_ % of the total contract value anticipated in good faith by the bidder/proposer to be subcontracted for services and/or credited to an M/WBE Prime Contractor or Qualified Joint Venture.

**Basis for Waiver Request: Check appropriate box & explain in detail below (attach additional pages if needed)**

- Vendor does not subcontract services, and has the capacity and good faith intention to perform all such work itself with its own employees.
- Vendor subcontracts some of this type of work but at a lower % than bid/solicitation describes, and has the capacity and good faith intention to do so on this contract. (Attach subcontracting plan outlining services that the vendor will self-perform and subcontract to other vendors or consultants.)
- Vendor has other legitimate business reasons for proposing the M/WBE Participation Goal above. Explain under separate cover.

**References**

List 3 most recent contracts performed for NYC agencies (if any). Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.  
 (Complete ONLY if vendor has performed fewer than 3 New York City contracts.)


<b>TYPE OF Contract</b> _____	<b>ENTITY</b> _____	<b>DATE COMPLETED</b> _____
<b>Manager at entity that hired vendor (Name/Phone No./Email)</b> _____		
<b>Total Contract Amount</b> \$ _____	<b>Total Amount Subcontracted</b> \$ _____	
<b>Type of Work Subcontracted</b> _____	_____	_____

<b>TYPE OF Contract</b> _____	<b>AGENCY/ENTITY</b> _____	<b>DATE COMPLETED</b> _____
<b>Manager at agency/entity that hired vendor (Name/Phone No./Email)</b> _____		
<b>Total Contract Amount</b> \$ _____	<b>Total Amount Subcontracted</b> \$ _____	
<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____

<b>TYPE OF Contract</b> _____	<b>AGENCY/ENTITY</b> _____	<b>DATE COMPLETED</b> _____
<b>Manager at entity that hired vendor (Name/Phone No./Email)</b> _____		
<b>Total Contract Amount</b> \$ _____	<b>Total Amount Subcontracted</b> \$ _____	
<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____	<b>Item of Work Subcontracted and Value of subcontract</b> _____

**VENDOR CERTIFICATION:** I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

**Signature:** \_\_\_\_\_ **Date:** \_\_\_\_\_  
**Print Name:** \_\_\_\_\_ **Title:** \_\_\_\_\_

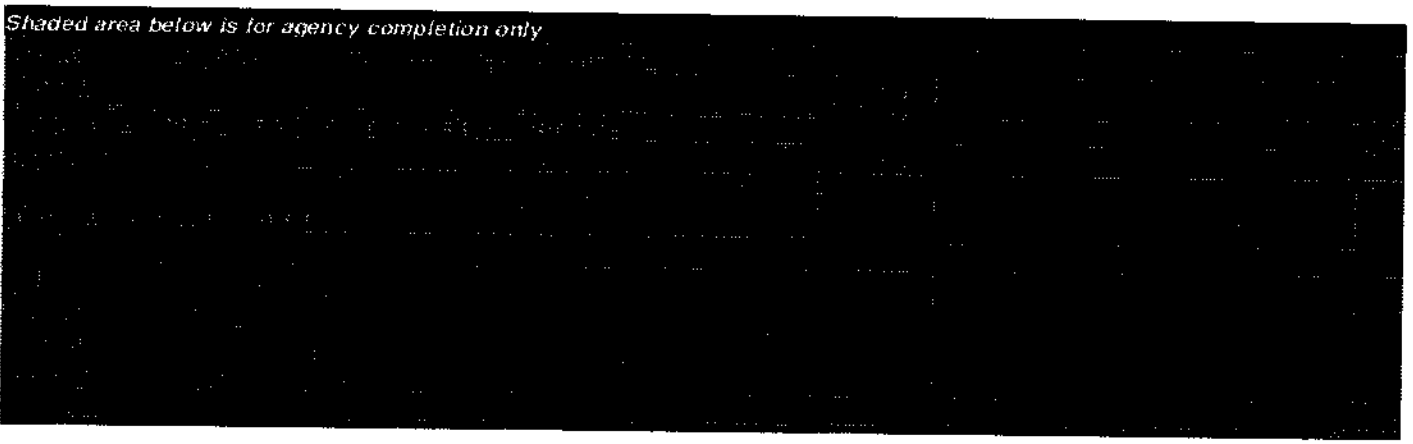

**BID FORM**  
**THE CITY OF NEW YORK**  
**DEPARTMENT OF DESIGN AND CONSTRUCTION**  
**DIVISION OF PUBLIC BUILDINGS**

**BID FOR FURNISHING ALL LABOR AND**  
**MATERIAL NECESSARY AND REQUIRED FOR:**

**PROJECT ID: PVC341-M**

**Historic Richmond Town Utilities Upgrade**  
**441 Clarke Avenue**  
**Staten Island 10306**

Name of Bidder: \_\_\_\_\_

Date of Bid Opening: \_\_\_\_\_

Bidder is: (Check one, whichever applies) Individual ( ) Partnership ( ) Corporation ( )

Place of Business of Bidder: \_\_\_\_\_

Bidder's Telephone Number: \_\_\_\_\_ Bidder's Fax Number: \_\_\_\_\_

Bidder's Email Address: \_\_\_\_\_

Residence of Bidder (If Individual): \_\_\_\_\_

If Bidder is a Partnership, fill in the following blanks:

Names of Partners

Residence of Partners


If Bidder is a Corporation, fill in the following blanks:

Organized under the laws of the State of \_\_\_\_\_

Name and Home Address of President: \_\_\_\_\_  
\_\_\_\_\_

Name and Home Address of Secretary: \_\_\_\_\_  
\_\_\_\_\_

Name and Home Address of Treasurer: \_\_\_\_\_  
\_\_\_\_\_

**THIS PAGE INTENTIONALLY LEFT BLANK**

## BID FORM

The above-named Bidder affirms and declares:

1. The said bidder is of lawful age and the only one interested in this bid; and no person, firm or corporation other than hereinbefore named has any interest in this bid, or in the Contract proposed to be taken.
2. By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief: (1) the prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or with any competitor; (2) unless otherwise required by law, the prices quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor; and (3) no attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.
3. No councilman or other officer or employee or person whose salary is payable in whole or in part from the City Treasury is directly or indirectly interested in this bid, or in the supplies, materials, equipment, work or labor to which it relates, or in any of the profits thereof.
4. The bidder is not in arrears to the City of New York upon debt or contract or taxes, and is not a defaulter, as surety or otherwise, upon any obligation of the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York or State of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except as set forth on the Affirmation included as page 17 of this Bid Booklet.

The bidder hereby affirms that it has paid all applicable City income, excise and other taxes for all years it has conducted business activities in New York City.

5. The bidder, as an individual, or as a member, partner, director or officer of the bidder, if the same be a firm, partnership or corporation, executes this document expressly warranting and representing that should this bid be accepted by the City and the Contract awarded to him, he and his subcontractors engaged in the performance:
  - (1) will comply with the provisions of Section 6-108 of the Administrative Code of the City of New York and the non-discrimination provisions of Section 220a of the New York State Labor Law, as more expressly and in detail set forth in the Agreement;
  - (2) will comply with Section 6-109 of the Administrative Code of the City of New York in relation to minimum wages and other stipulations as more expressly and in detail set forth in the Agreement;
  - (3) have complied with the provisions of the aforesaid laws since their respective effective dates, and
  - (4) will post notices to be furnished by the City, setting forth the requirements of the aforesaid laws in prominent and conspicuous places in each and every plant, factory, building and structure where employees engaged in the performance of the Contract can readily view it, and will continue to keep such notices posted until the supplies, materials and equipment, or work labor and services required to be furnished or rendered by the Contractor have been finally accepted by the City. In the event of any breach or violation of the foregoing, the Contractor may be subject to damages, liquidated or otherwise, cancellation of the Contract and suspension as a bidder for a period of three years. (The words, "the bidder", "he", "his", and "him" where used shall mean the individual bidder, firm, partnership or corporation executing this bid).

6. Compliance Report

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, (1) represents that his attention has been specifically drawn to Executive Order No. 50, dated April 25, 1980, on Equal Employment Compliance of the contract, and (2) warrants that he will comply with the provisions of Executive Order No. 50. The Employment Report must be submitted as part of the bid.

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, executes this document expressly warranting that he will comply with: (1) the provision of the contract on providing records, Chapter 8.

7. By submission of this bid, the bidder certifies that it now has and will continue to have the financial capability to fully perform the work required for this contract. Any award of this contract will be made in reliance upon such certification. Upon request therefor, the bidder will submit written verification of such financial capability in a form that is acceptable to the department.

8. In accordance with Section 165 of the State Finance Law, the bidder agrees that tropical hardwoods, as defined in Section 165 of the State Finance Law, shall not be utilized in the performance of this Contract, except as the same are permitted by the foregoing provision of law.

9. The bidder has visited and examined the site of the work and has carefully examined the Contract in the form approved by the Corporation Counsel, and will execute the Contract and perform all its items, covenants and conditions, and will provide, furnish and deliver all the work, materials, supplies, tools and appliances for all labor and materials necessary or required for the hereinafter named work, all in strict conformity with the Contract, for the prices set forth in the Bid Schedule:

10. **M/WBE UTILIZATION PLAN:** By signing its bid, the bidder agrees to the Vendor Certification and Required Affirmations set forth below, unless a full waiver of the Participation Goals is granted. The Vendor Certification and Required Affirmations will be deemed to satisfy the requirement to complete Section V of Part II of Schedule B: M/WBE Utilization Plan.

**Section V: Vendor Certification and Required Affirmations:**

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth in this Contract and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of the M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or If a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.



**BID FORM**

**PROJECT ID: PVC341-M**

- A. **TOTAL BID PRICE** - Total price for all labor and material for all required work. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

In the space provided below, the Bidder shall indicate its Total Bid Price in figures. Such Total Bid Price is set forth on page 21-23 of the Bid Schedule.

TOTAL BID PRICE \$ \_\_\_\_\_  
( a/k/a BID PROPOSAL)

**BIDDER'S SIGNATURE AND AFFIDAVIT**

- \* **SUBCONTRACTOR IDENTIFICATION:** You MUST complete and submit the form entitled "Bidder's Identification of Subcontractors" (page 17) at the time you submit your bid. You must submit this form in a separate, sealed envelope (BID ENVELOPE #2). In the event an award of contract is not made to the Bidder, the Bidder hereby authorizes the Agency to shred the form entitled "Bidder's Identification of Subcontractors".  Yes  No

Bidder: \_\_\_\_\_

By: \_\_\_\_\_  
(Signature of Partner or corporate officer)

Attest: \_\_\_\_\_ Secretary of Corporate Bidder  
(Corporate Seal)

Affidavit on the following page should be subscribed and sworn to before a Notary Public

**THIS PAGE INTENTIONALLY LEFT BLANK**

**BID FORM (TO BE NOTARIZED)**

\*\*\*\*\*

**AFFIDAVIT WHERE BIDDERS IS AN INDIVIDUAL**

STATE OF NEW YORK, COUNTY OF \_\_\_\_\_ ss:

\_\_\_\_\_ being duly sworn says:

I am the person described in and who executed the foregoing bid, and the several matters therein stated are in all respects true.

\_\_\_\_\_  
(Signature of the person who signed the Bid)

Subscribed and sworn to before me this  
\_\_\_\_\_ day of \_\_\_\_\_,

\_\_\_\_\_  
Notary Public

\*\*\*\*\*

**AFFIDAVIT WHERE BIDDERS IS A PARTNERSHIP**

STATE OF NEW YORK, COUNTY OF \_\_\_\_\_ ss:

\_\_\_\_\_ being duly sworn says:

I am a member of \_\_\_\_\_ the firm described in and which executed the foregoing bid. I subscribed the name of the firm thereto on behalf of the firm, and the several matters therein stated are in all respects true.

\_\_\_\_\_  
(Signature of Partner who signed the Bid)

Subscribed and sworn to before me this  
\_\_\_\_\_ day of \_\_\_\_\_,

\_\_\_\_\_  
Notary Public

\*\*\*\*\*

**AFFIDAVIT WHERE BIDDERS IS A CORPORATION**

STATE OF NEW YORK, COUNTY OF \_\_\_\_\_ ss:

\_\_\_\_\_ being duly sworn says:

I am the \_\_\_\_\_ of the above named corporation whose name is subscribed to and which executed the foregoing bid. I reside at \_\_\_\_\_

I have knowledge of the several matters therein stated, and they are in all respects true.

\_\_\_\_\_  
(Signature of Corporate Officer who signed the Bid)

Subscribed and sworn to before me this  
\_\_\_\_\_ day of \_\_\_\_\_,

\_\_\_\_\_  
Notary Public

**AFFIRMATION**

The undersigned bidder affirms and declares that said bidder is not in arrears to the City of New York upon debt, contract or taxes and is not a defaulter, as surety or otherwise, upon obligation to the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except \_\_\_\_\_

(If none, the bidder shall insert the word "None" in the space provided above.)

Full Name of Bidder: \_\_\_\_\_  
Address: \_\_\_\_\_  
City: \_\_\_\_\_ State: \_\_\_\_\_ Zip Code: \_\_\_\_\_

CHECK ONE BOX AND INCLUDE APPROPRIATE NUMBER:

A - Individual or Sole Proprietorship \*  
SOCIAL SECURITY NUMBER

-----

B - Partnership, Joint Venture or other unincorporated organization  
EMPLOYER IDENTIFICATION NUMBER

-----

C - Corporation  
EMPLOYER IDENTIFICATION NUMBER

-----

By: \_\_\_\_\_  
Signature:

Title: \_\_\_\_\_

If a corporation, place seal here

This affirmation must be signed by an officer or duly authorized representative.

\* Under the Federal Privacy Act the furnishing of Social Security Numbers by bidders on City contracts is voluntary. Failure to provide a Social Security Number will not result in a bidder's disqualification. Social Security Numbers will be used to identify bidders, proposers or vendors to ensure their compliance with laws, to assist the City in enforcement of laws, as well as to provide the City a means of identifying of businesses which seek City contracts.

## **BIDDER'S IDENTIFICATION OF SUBCONTRACTORS**

### **NOTICE TO BIDDERS**

**SUBMISSION:** The Bidder must, at the time of the bid, submit the form on the next page ("BIDDER'S IDENTIFICATION OF SUBCONTRACTORS"). This form must be submitted in a separate, sealed envelope (BID ENVELOPE #2). Failure to do so will result in the disqualification of the bid as non-responsive.

\*\*\*\*\*

Please be advised that pursuant to GML § 101(5) the Bidder is required to submit with its bid the names of subcontractors it intends to use to perform the following work on this contract, as well as the agreed-upon amount to be paid to each:

- plumbing and gas fitting;
- steam heating, hot water heating, ventilating and air conditioning apparatus; and
- electric wiring and standard illuminating fixtures.

**NOTE:** This project may not involve all of the above listed subcontractors. Please see the form on the next page which indicates the subcontractors required for this Project.

The list of subcontractors is to be submitted in a separate sealed envelope by completing the form on the next page entitled "Bidder's Identification of Subcontractors". This form provides for the identification of any subcontractors intended to be used in any of the three trades listed above. If bidder intends to use its own forces for any of the above listed work, bidder should so indicate on the form.

**Failure to submit the completed form on the next page ("Bidder's Identification of Subcontractors") that includes the names of subcontractors and the agreed upon amounts to be paid to such subcontractors will render the bid non-responsive.**

**PLEASE NOTE:** for any contract that is subject to M/WBE Participation Goals under Section 6-129 of the Administrative Code of the City of New York, if the bidder's intention to use its own forces to do any of the above-referenced work would result in Bidder's failure to attain the Participation Goals identified in the M/WBE Utilization Plan, the bid will be non-responsive unless the bidder requests and obtains a full or partial waiver of the Participation Goals (M/WBE Utilization Plan, Part III) in advance of bid submission. For more information see Notice to All Prospective Contractors, Participation by Minority-Owned and Women-Owned Business Enterprises in City Procurement.

After the low bid is announced, the sealed list submitted by the low bidder will be opened and the names of the subcontractors will be announced. The sealed lists of subcontractors submitted by all other bidders shall be maintained by the Agency unopened unless such bidder shall become the low bidder (e.g., the initial low bidder is found non-responsive). All unopened lists of subcontractors shall be returned to the bidders unopened after contract award, unless the bidder has given the agency permission to shred the form.

After bid submission, any change of subcontractor or agreed-upon amount to be paid to each shall require approval of the Agency upon a showing of a legitimate construction need which shall include, but not be limited to, a change in project specifications, a change in project material costs, a change to subcontractor status as determined pursuant to §222 (2)(e) of the Labor Law, or if the subcontractor has become otherwise unwilling, unable or unavailable to perform the subcontract.

**BIDDER'S IDENTIFICATION OF SUBCONTRACTORS**

**Project ID: PVC341-M**

**SUBMISSION:** In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

**1. ELECTRICAL CONTRACTOR:**

\_\_\_\_\_ (Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ \_\_\_\_\_

**BIDDER'S SIGNATURE:** The Bidder must sign this form in the space provided below:

Name of Bidder: \_\_\_\_\_

By: \_\_\_\_\_  
Signature of Partner or Corporate Officer

Print Name: \_\_\_\_\_

Title: \_\_\_\_\_

**BID BOND 1  
FORM OF BID BOND**

KNOW ALL MEN BY THESE PRESENTS. That we, \_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Principal", and \_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of \_\_\_\_\_  
\_\_\_\_\_

(\$ \_\_\_\_\_), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.

BID BOND 2

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to him the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

(Seal)

\_\_\_\_\_  
Principal (L.S.)

By: \_\_\_\_\_

(Seal)

\_\_\_\_\_  
Surety

By: \_\_\_\_\_



BID BOND 3

ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:  
On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn, did depose and say that he resides at \_\_\_\_\_ that he is the \_\_\_\_\_ of \_\_\_\_\_ the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

\_\_\_\_\_  
Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:  
On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known and known to me to be one of the members of the firm of \_\_\_\_\_ described in and who executed the foregoing instrument, and he acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:  
On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known and known to me to be the person described in and who executed the foregoing instrument and acknowledged that he executed the same.

\_\_\_\_\_  
Notary Public

AFFIX ACKNOWLEDGEMENTS AND JUSTIFICATION OF SURETIES

**THIS PAGE INTENTIONALLY LEFT BLANK**

**BID SCHEDULE**

**NOTICE TO BIDDERS**

Items listed in this Bid Schedule which have one (1) digit followed by a decimal (e.g. 4.02 CB) shall comply with the requirements of the corresponding numerical Sections of the NYCDOT Standard Highway Specifications as amended by Addendum No. 1, herein Volume 3 of 3.

Items listed in this Bid Schedule which have two (2) digits beginning with the number "5" followed by a decimal (e.g. 52.11D12) shall comply with the requirements of the New York City Department of Environmental Protection (NYCDEP) Standard Sewer Specifications, dated August 1, 2009, and as amended by Addendum No. 2, herein Volume 3 of 3.

Items listed in this Bid Schedule which have two (2) digits beginning with the number "6" followed by a decimal (e.g. 60.12D12) shall comply with the requirements of the New York City Department of Environmental Protection (NYCDEP) Standard Water Main Specifications, dated August 1, 2009, and as amended by Addendum No. 2, herein Volume 3 of 3.

Items listed in this Bid Schedule which have two (2) digits beginning with the number "7" followed by a decimal (e.g. 70.31FN) shall comply with the requirements of the New York City Department of Environmental Protection (NYCDEP) Standard Sewer Specifications, dated August 1, 2009, or the NYCDEP Standard Water Main Specifications, dated August 1, 2009, as applicable, and as amended by Addendum No. 2, herein Volume 3 of 3.

Items listed in this Bid Schedule beginning with the prefix "SL-" (e.g. SL-21.03.02) are Street Lighting Items less the prefix which shall be done in accordance with the latest revision of the New York City Department of Transportation (NYCDOT) Division of Street Lighting Standard Specifications and the requirements of Sub-Section 1.06.23. (D) and Section 1.06.49 in the Standard Highway Specifications.

(NO TEXT ON THIS PAGE)

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

## BID SCHEDULE

NOTE:

- (1) The Agency may reject a bid if it contains unbalanced bid prices. An unbalanced bid is considered to be one containing lump sum or unit items which do not reflect reasonable actual costs plus a reasonable proportionate share of the Bidder's anticipated profit, overhead costs, and other indirect costs, anticipated for the performance of the items in question.
- (2) The following bid prices on Unit Price Contracts are to be paid for the actual quantities of the item numbers in the completed work or structure, and they cover the cost of all work, labor, material, tools, plant and appliances of every description necessary to complete the entire work, as specified, and the removal of all debris, temporary work and appliances.
- (3) **PLEASE BE SURE A LEGIBLE BID IS ENTERED, IN INK, FOR EACH ITEM.**  
Alterations must be initialed in ink by the bidder.
- (4) The Extended Amount entered in Column 6 shall be the product of the Estimated Quantity in Column 3 times the Unit Price Bid in Column 5.
- (5) Prospective bidders must examine the Bid Schedule carefully and, before bidding, must advise the Commissioner, in writing, if any pages are missing, and must request that such missing pages be furnished them. The pages of this Bid Schedule are numbered consecutively, as follows: 21 - 3 through 21 - 23.

PLEASE BE SURE A LEGIBLE BID IS ENTERED FOR EACH ITEM.  
THE BIDDER SHALL INSERT THE TOTAL BID PRICE IN  
THE BID FORM ON PAGE 13 OF THIS BID BOOKLET.

THIS PAGE INTENTIONALLY LEFT BLANK

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
001	4.01 RAG ASPHALT MACADAM PAVEMENT, 6" THICK	4,500	S. Y.		
002	4.02 AG ASPHALTIC CONCRETE WEARING COURSE, 3" THICK	200	S. Y.		
003	4.02 CB ASPHALTIC CONCRETE MIXTURE	50	TONS		
004	4.04 B CONCRETE BASE FOR PAVEMENT, VARIABLE THICKNESS FOR TRENCH RESTORATION, CLASS B-32	50	C. Y.		
005	4.06 CONCRETE IN STRUCTURES, CLASS A-40	60	C. Y.		
006	4.07 CB NEW GRANITE CURB, STRAIGHT	650	L. F.		
007	4.07 CC NEW GRANITE CURB, CORNER	40	L. F.		
008	4.07 CD NEW STRAIGHT GRANITE CURB, DEPRESSED AND TRANSITION	60	L. F.		
009	4.08 AA CONCRETE CURB (18" DEEP)	50	L. F.		
010	4.11 ARW RETAINING WALL EXCAVATION	500	C. Y.		
011	4.11 CA FILL, PLACE MEASUREMENT	500	C. Y.		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS	COL 7 CTS
012	4.13 ABX 4" CONCRETE SIDEWALK WITH SPECIAL SCORING (PIGMENTED)	6,600	S.F.			
013	4.13 BBX 7" CONCRETE SIDEWALK WITH SPECIAL SCORING (PIGMENTED)	1,700	S.F.			
014	4.13 DE EMBEDDED PREFORMED DETECTABLE WARNING UNITS	30	S.F.			
015	4.14 STEEL REINFORCEMENT BARS	2,000	LBS			
016	4.20 SEEDING	4,900	S.Y.			
017	4.21 TREE CONSULTANT	40	P/HR			
018	4.22 B PROTECTIVE TREE BARRIER, TYPE 'B'	20	EA			
019	52.41 D06N NEW 6" DIP HOUSE CONNECTION DRAIN ON STONE BEDDING	900	L.F.			
020	50.31 SC08 8" ESVP SANITARY SEWER, ON CONCRETE CRADLE	730	L.F.			
021	50.31 SC10 10" ESVP SANITARY SEWER, ON CONCRETE CRADLE	150	L.F.			



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
022	51.11 P004 STANDARD 4'-0" DIAMETER PRECAST MANHOLE	20	EA		
023	51.41 S002 STANDARD CATCH BASIN, TYPE 2	2	EA		
024	51.41 S003 STANDARD CATCH BASIN, TYPE 3	1	EA		
025	52.11 D12 12" DUCTILE IRON PIPE BASIN CONNECTION	25	L.F.		
026	53.11 DR TELEVISION INSPECTION AND DIGITAL AUDIO-VISUAL RECORDING OF SEWERS	1,800	L.F.		
027	54.11 SC SEWER CLEANING	500	L.F.		
028	54.12 CS CLEANING OF DRAINAGE STRUCTURES	20	C.Y.		
029	54.12 SEP PUMP OUT AND DISPOSE OF CONTENTS OF SEPTIC TANK	10	C.Y.		
030	56.10 4" DIP SANITARY FORCE MAIN	120	L.F.		
031	56.20 CLEAN-OUT RISER PIPE AND CASTING	5	EA		
032	56.30 HOUSE TRAP AND PIT STRUCTURE	5	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
033	56.40 NEW SANITARY SEWER EJECTOR PIT AND PUMP SYSTEM INSTALLED IN BASEMENT OF THE TAVERN BUILDING	1	L.S.		
034	56.50 REMOVE EXISTING SANITARY SEWER EJECTOR PUMP SYSTEM IN BASEMENT OF THE MUSEUM BUILDING; REPLACE WITH GRAVITY SANITARY SEWER SYSTEM	1	L.S.		
035	6.02 AAN UNCLASSIFIED EXCAVATION	2,000	C.Y.		
036	6.06 BB GRANITE BLOCK SIDEWALK (GROUTED JOINTS; SALVAGED BLOCK)	10	S.Y.		
037	6.07 AA EXISTING BLUESTONE FLAGS RELAID	750	S.F.		
038	6.22 F ADDITIONAL HARDWARE	1,000	LBS		
039	6.23 AF F & I F.D. POLE TERMINAL (CHIPPY) BOX IN ACCORDANCE WITH F.D. STD. DWG. #145AA	3	EA		
040	6.23 BA F & I FIRE ALARM POST AND SUBBASE IN ACCORDANCE WITH F.D. STD. DWG. #141	1	EA		
041	6.23 BBS F & I 3" 90-DEGREE PVC WIDE BENDS, SCHED 40, W/O PAVT EXCAV IN ACCORDANCE WITH F.D. STD. DWG. #141	3	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
042	6.23 BCS F & 1 3" PVC CONDUIT SCHEDULE 40, U.L.651 W/O PAVEMENT EXCAVATION	650	L.F.		
043	6.23 BD F & 1 4-PAIR FIRE ALARM CABLE	680	L.F.		
044	6.23 BFB F & I FIRE DEPARTMENT 24 WIRE TERMINAL BOX AND TERMINATE FIRE ALARM CABLES	1	EA		
045	6.23 BGD F & 1 3" PVC CONDUIT TO 3" GALVANIZED STEEL REDUCER BUSHING IN ACCORDANCE WITH F. D. STD. DWG. #145AA	3	EA		
046	6.23 HH F & I FDNY SIDEWALK HANDHOLE WITH FRAME AND COVER (TYPE "A" MANHOLE) ACCORDANCE WITH F. D. STD. DWG. #143, #144B AND #144E	4	EA		
047	6.23 XAPE F & 1 1/2" GALVANIZED STEEL CONDUIT POLE RISER IN ACCORDANCE WITH F. D. STD. DWG. #145AA	3	EA		
048	6.23 XCPE F & 1 3" GALVANIZED STEEL CONDUIT POLE RISER IN ACCORDANCE WITH F. D. STD. DWG. #145AA	3	EA		
049	6.24 ASPHALTIC CONCRETE SIDEWALK	30	S.F.		
050	6.24 X GRAVEL WALKWAY, 6" THICK	490	S.F.		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS CTS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS CTS
051	6.40 B ENGINEER'S FIELD OFFICE (TYPE B)	24	MO		
052	6.41 LINE AND GRADE SURVEYS	1	L.S.		
053	6.43 PHOTOGRAPHS	1,000	SETS		
054	6.46 DENSE-GRADED STONE BASE	1,010	C.Y.		
055	6.55 SAWCUTTING EXISTING PAVEMENT	3,900	L.F.		
056	6.56 ERGC EPOXY RESIN GRANITE CHIP PAVEMENT OVERLAY	40,000	S.F.		
057	6.58 TACK COAT	4,700	S.Y.		
058	6.66 X FURNISH AND INSTALL BRICK PAVERS	1,500	S.F.		
059	6.68 PLASTIC FILTER FABRIC	4,500	S.Y.		
060	6.70 MAINTENANCE AND PROTECTION OF TRAFFIC	1	L.S.		
061	6.99 AUDIO/VIDEO DOCUMENTATION SURVEY	1	L.S.		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
062	60.11 R606 FURNISHING AND DELIVERING 6-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	100	L.F.		
063	60.11 R608 FURNISHING AND DELIVERING 8-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	1,100	L.F.		
064	60.11 R612 FURNISHING AND DELIVERING 12-INCH DUCTILE IRON RESTRAINED JOINT PIPE (CLASS 56)	20	L.F.		
065	60.12 D06 LAYING 6-INCH DUCTILE IRON PIPE AND FITTINGS	120	L.F.		
066	60.12 D08 LAYING 8-INCH DUCTILE IRON PIPE AND FITTINGS	1,300	L.F.		
067	60.12 D12 LAYING 12-INCH DUCTILE IRON PIPE AND FITTINGS	25	L.F.		
068	60.13 M0A24 FURNISHING AND DELIVERING DUCTILE IRON MECHANICAL JOINT 24-INCH DIAMETER AND SMALLER FITTINGS, INCLUDING WEDGE-TYPE RETAINER GLANDS	3	TONS		
069	61.11 DMM06 FURNISHING AND DELIVERING 6-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE- TYPE RETAINER GLANDS	8	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
070	61.11 DMM08 FURNISHING AND DELIVERING 8-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE- TYPE RETAINER GLANDS	6	EA		
071	61.12 DMM06 SETTING 6-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	8	EA		
072	61.12 DMM08 SETTING 8-INCH MECHANICAL JOINT DUCTILE IRON GATE VALVE COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	6	EA		
073	62.11 SS FURNISHING AND DELIVERING HYDRANTS - SMITH TYPE (S-2-LP)	7	EA		
074	62.12 SG SETTING HYDRANTS COMPLETE WITH WEDGE-TYPE RETAINER GLANDS	7	EA		
075	62.13 RH REMOVING HYDRANTS	5	EA		
076	62.14 FS FURNISHING, DELIVERING AND INSTALLING HYDRANT FENDERS	14	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
077	63.11 VC FURNISHING AND DELIVERING VARIOUS CASTINGS	5	TONS		
078	64.11 ST WITHDRAWING AND REPLACING HOUSE SERVICES USING SMALLER THAN 1.5-INCH SCREW TAPS	1	EA		
079	64.11 EL WITHDRAWING AND REPLACING HOUSE SERVICES USING 1.5-INCH OR LARGER SCREW TAPS	3	EA		
080	64.12 ESLT EXTENDING HOUSE SERVICE WATER CONNECTIONS (LESS THAN 3-INCH DIAMETER)	220	L.F.		
081	65.11 BR FURNISHING, DELIVERING AND INSTALLING BANDS, RODS, WASHERS, ETC., COMPLETE, FOR RESTRAINING JOINTS	300	LB		
082	65.21 PS FURNISHING AND PLACING POLYETHYLENE SLEEVE	1,220	L.F.		
083	65.31 FF FURNISHING, DELIVERING, AND PLACING FILTER FABRIC	24,400	S.F.		
084	65.71 SG FURNISHING, DELIVERING AND PLACING SCREENED GRAVEL OR BROKEN STONE BEDDING	100	C.Y.		
085	68.10 WATER METER / DCV PIT AND ASSOCIATED WORK	2	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
086	68.20 A FURNISH AND INSTALL 1" CURB VALVES	1	EA		
087	68.20 C FURNISH AND INSTALL 2" CURB VALVES	2	EA		
088	68.20 D FURNISH AND INSTALL 2-1/2" CURB VALVES	1	EA		
089	7.13 B MAINTENANCE OF SITE	24	MO		
090	7.16 D TEST PITS	50	C.Y.		
091	7.88 AA RODENT INFESTATION SURVEY AND MONITORING	1	L.S.		
092	7.88 AB RODENT BAIT STATIONS	50	EA		
093	7.88 AC BAITING OF RODENT BAIT STATIONS	50	EA		
094	7.88 AD WATERBUG BAIT APPLICATIONS	20	BLOCK		
095	70.31 FN TEMPORARY FENCE	6,000	L.F.		



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
096	70.51 EO EXCAVATION OF BOULDERS IN OPEN CUT	15	C.Y.		
097	70.71 SB STONE BALLAST	12	C.Y.		
098	70.81 CB CLEAN BACKFILL	220	C.Y.		
099	70.91 SW12 FURNISHING AND PLACING SHEETING AND BRACING IN TRENCH FOR WATER MAIN PIPE 12-INCHES IN DIAMETER AND LESS	5,000	S.F.		
100	73.11 AB ADDITIONAL BRICK MASONRY	10	C.Y.		
101	73.21 AC ADDITIONAL CONCRETE	15	C.Y.		
102	73.31 AE0 ADDITIONAL EARTH EXCAVATION INCLUDING TEST PITS, ALL DEPTHS	210	C.Y.		
103	73.41 AG ADDITIONAL SELECT GRANULAR BACKFILL	10	C.Y.		
104	73.51 AS ADDITIONAL STEEL REINFORCING BARS	800	LB		
105	76.31 CM CONTINUOUS REAL-TIME MONITORING FOR VIBRATIONS AND MOVEMENTS AND POST-CONSTRUCTION REPORT	6	MO		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
106	8.02 A SPECIAL CARE EXCAVATION AND RESTORATION FOR SIDEWALK WORK	560	S.F.		
107	8.02 B SPECIAL CARE EXCAVATION AND RESTORATION FOR CURB WORK	90	L.F.		
108	8.10 C-1 NEW SURVEY MONUMENT, TYPE "C", CLASS 1	1	EA		
109	8.22 BR RESTORE EXISTING BRICK RETAINING WALL	5	C.Y.		
110	8.22 RS RESTORE EXISTING RUBBLE STONE RETAINING WALL	80	C.Y.		
111	9.30 STORM WATER POLLUTION PREVENTION	1	L.S.		
112	500 AT ARCHEOLOGICAL TESTING	120	P/HR		
113	500 AM ARCHEOLOGICAL MONITORING	120	P/HR		
114	500 AC ARCHEOLOGICAL CONSERVATION	1	FIXED SUM	\$11,000.00	\$11,000.00
115	500 AL ARCHEOLOGICAL LAB AND FIELD TECHNICIAN	1	FIXED SUM	\$11,000.00	\$11,000.00
116	500 AFR ARCHEOLOGICAL FINAL REPORT	1	FIXED SUM	\$22,000.00	\$22,000.00

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT FIXED SUM	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS	CTS
117	500 PA PHYSICAL ANTHROPOLOGIST	1	FIXED SUM	\$11,000	\$11,000	.00
118	500 PE PUBLIC EDUCATION PROGRAM	1	FIXED SUM	\$10,000	\$10,000	.00
119	A-060000 A BUILDING ARCHITECTURAL WORK - SEAMAN'S COTTAGE, BUILDING # 24	1	L.S.			
120	A-060000 B BUILDING ARCHITECTURAL WORK - MUSEUM, BUILDING # 23	1	L.S.			
121	A-060000 C BUILDING ARCHITECTURAL WORK - COURT HOUSE, BUILDING # 1	1	L.S.			
122	A-060000 D BUILDING ARCHITECTURAL WORK - PS 28, BUILDING 'L'	1	L.S.			
123	A-060000 E BUILDING ARCHITECTURAL WORK - SCHWIEBERT HOUSE, BUILDING 'J'	1	L.S.			
124	A-060000 F BUILDING ARCHITECTURAL WORK - BENNETT HOUSE # 27, BUILDING # 16	1	L.S.			
125	A-060000 G BUILDING ARCHITECTURAL WORK - TRANSPORTATION MUSEUM, BUILDING 'R'	1	L.S.			

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021553

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
126	A-060000 H BUILDING ARCHITECTURAL WORK - STEPHENS-PRIER HOUSE, BUILDING 'O'	1	L.S.		
127	A-060000 I BUILDING ARCHITECTURAL WORK - GUYON STORE/ TAVERN, BUILDING #7	1	L.S.		
128	A-060000 J BUILDING ARCHITECTURAL WORK - NEW DORP RAILROAD STATION, BUILDING 'P'	1	L.S.		
129	C-271343 TELEPHONE SERVICE CABLE AND EQUIPMENT	4,400	L.F.		
130	E-16130.03 A F & I PULL BOXES (NEMA 4X STAINLESS STEEL)	1	EA		
131	E-16130.06 A F & I JUNCTION BOXES (NEMA 4X STAINLESS STEEL)	1	EA		
132	E-260010 A BUILDING ELECTRICAL WORK - SEAMAN'S COTTAGE, BUILDING # 24	1	L.S.		
133	E-260010 B BUILDING ELECTRICAL WORK - MUSEUM, BUILDING # 23	1	L.S.		
134	E-260010 C BUILDING ELECTRICAL WORK - COURT HOUSE, BUILDING # 1	1	L.S.		
135	E-260010 D BUILDING ELECTRICAL WORK - PS 28, BUILDING 'L'	1	L.S.		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS	CTS
136	E-260010 E BUILDING ELECTRICAL WORK - SCHWIEBERT HOUSE, BUILDING 'J'	1	L.S.			
137	E-260010 F BUILDING ELECTRICAL WORK - BENNETT HOUSE # 27, BUILDING # 16	1	L.S.			
138	E-260010 G BUILDING ELECTRICAL WORK - TRANSPORTATION MUSEUM, BUILDING 'R'	1	L.S.			
139	E-260010 H BUILDING ELECTRICAL WORK - SHED 38, BUILDING 'R'	1	L.S.			
140	E-260010 I BUILDING ELECTRICAL WORK - STEPHENS-PRIER HOUSE, BUILDING 'O'	1	L.S.			
141	E-260010 J BUILDING ELECTRICAL WORK - GUYON STORE/ TAVERN, BUILDING #7	1	L.S.			
142	E-260010 K BUILDING ELECTRICAL WORK - NEW DORP RAILROAD STATION, BUILDING 'P'	1	L.S.			
143	E-260010 L BUILDING ELECTRICAL WORK - COLON STORE/ TINSMITH, BUILDING #22	1	L.S.			
144	E-260010 M BUILDING ELECTRICAL WORK - GENERAL STORE, BUILDING #19	1	L.S.			

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
145	E-260010 N BUILDING ELECTRICAL WORK - PRINT SHOP, BUILDING #18	1	L.S.		
146	E-260010 O BUILDING ELECTRICAL WORK - CARPENTERS SHOP, BUILDING #17	1	L.S.		
147	E-260020 ELECTRICAL UTILITY SERVICE WORK, INCLUDING REMOVALS AND NEW FENCING	1	L.S.		
148	E-260020 A CON ED SUPPLIED EQUIPMENT AND SERVICE WORK	1	FIXED SUM	\$67,000 .00	\$67,000 .00
149	E-260020 TW ALLOWANCE FOR TIME WARNER PERFORMED WORK	1	FIXED SUM	\$7,000 .00	\$7,000 .00
150	E-260020 V ALLOWANCE FOR VERIZON PERFORMED WORK	1	FIXED SUM	\$5,000 .00	\$5,000 .00
151	E-260533 AA METAL CONDUIT AND TUBING (3/4" GALVANIZED RIGID STEEL CONDUIT)	50	L.F.		
152	E-260533 AF METAL CONDUIT AND TUBING (1 1/2" GALVANIZED RIGID STEEL CONDUIT)	20	L.F.		
153	SL-20.01.01 F & I FOUNDATION FOR TYPE "B" OR "B12" POST WITH INTERNAL FLANGE, AS PER DRAWING E-3884	25	EA		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
154	SL-21.01.07 F & I TYPE "B" LAMPPOST WITH INTERNAL FLANGE (INCLUDES GFI LAMPPOST RECEPTACLE CORDS)	25	EA		
155	SL-22.01 A LED RIVERSIDE PARK LUMINAIRE W/DIMMING NODE AND GATEWAY / DIMMING SOFTWARE	25	EA		
156	SL-25.01.15 F & I FIRE ALARM BRACKET ARM AND LUMINAIRE WITH 7W FLUORESCENT LAMP ON METAL POLE	1	EA		
157	SL-33.01.01 A FURNISH AND INSTALL NO. 14 AWG XLP COPPER WIRE OR EQUAL IN CONDUIT (TYPE THHN)	150	L.F.		
158	SL-33.01.01 B FURNISH AND INSTALL NO. 10 AWG XLP COPPER WIRE OR EQUAL IN CONDUIT	300	L.F.		
159	SL-33.01.02 FURNISH AND INSTALL NO. 6 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	11,100	L.F.		
160	SL-33.01.02 A FURNISH AND INSTALL NO. 4 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	26,000	L.F.		
161	SL-33.01.03 FURNISH AND INSTALL NO. 2 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	14,000	L.F.		

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

BID SCHEDULE FORM

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 CTS	COL 8 EXTENDED AMOUNT (IN FIGURES) DOLLARS	COL 9 CTS
162	SL-33.01.05 FURNISH AND INSTALL NO. 4/0 AWG XLP COPPER CABLE OR EQUAL IN CONDUIT	22,000	L.F.				
163	SL-33.01 A 600 VOLT, GROUND WIRE, #2/0 AWG	4,000	L.F.				
164	SL-33.01 B 600 VOLT, GROUND WIRE, #2 AWG	3,400	L.F.				
165	SL-33.01 C 600 VOLT, GROUND WIRE, #4 AWG	2,000	L.F.				
166	SL-33.01 D 600 VOLT, GROUND WIRE, #6 AWG	500	L.F.				
167	SL-33.01 E 600 VOLT, GROUND WIRE, #10 AWG	50	L.F.				
168	SL-35.03.01 FURNISH AND INSTALL 3/4" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	90	L.F.				
169	SL-35.03 B FURNISH AND INSTALL 1" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	200	L.F.				
170	SL-35.03.03 FURNISH AND INSTALL 1-1/2" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	200	L.F.				
171	SL-35.03.05 FURNISH AND INSTALL 3" HOT DIPPED GALVANIZED STEEL CONDUIT IN UNPAVED AREA	300	L.F.				



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
177	SL-37.05 C 36" X 36" POLYMER CONCRETE BOX AND COVER	28	EA		

**SUB-TOTAL: \$** \_\_\_\_\_

178	6.39 A MOBILIZATION	1	L.S.		
<b>BID PRICE OF MOBILIZATION SHALL NOT EXCEED 4% OF THE ABOVE SUB-TOTAL PRICE.</b>					

**TOTAL BID PRICE: \$** \_\_\_\_\_

PLEASE BE SURE A LEGIBLE BID IS ENTERED FOR EACH ITEM.  
THE BIDDER SHALL INSERT THE TOTAL BID PRICE IN  
THE BID FORM ON PAGE 13 OF THIS BID BOOKLET.

05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEERS ESTIMATE OF QUANTITY	COL 4 UNIT	COL 5 UNIT PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS
172	SL-35.04.01 FURNISH AND INSTALL 2" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	1,800	L.F.		
173	SL-35.04.02 FURNISH AND INSTALL 3" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	12,500	L.F.		
174	SL-35.04.03 FURNISH AND INSTALL 4" PVC SCHEDULE 40 CONDUIT IN UNPAVED AREA	9,000	L.F.		
175	SL-37.05 A 17" X 30" POLYMER CONCRETE BOX AND COVER	23	EA		
176	SL-37.05 B 24" X 36" POLYMER CONCRETE BOX AND COVER	13	EA		

**DESCRIPTION AND LOCATION OF WORK:**

**Historic Richmond Town Utilities Upgrade**  
**441 Clake Avenue**  
**Staten Island, NY 10306**  
**E-PIN: 85014B0165 / DDC PIN: 8502014PV0026C**

**DOCUMENTS AVAILABLE AT:**

Department of Design and Construction, Contract Section  
 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101

**SUBMISSION OF BIDS BEFORE BID OPENING:****TIME TO SUBMIT:**

On or Before: **THURSDAY, SEPTEMBER 11, 2014**

**BIDS MUST BE CLOKED IN PRIOR TO BID OPENING**

**PLACE TO SUBMIT:**

Department of Design and Construction, Contract Section (located behind Security Desk)  
 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101

**BID OPENING:**

<b>PLACE OF BID OPENING:</b>	Department of Design and Construction Contract Section 30-30 Thomson Avenue – First Floor Long Island City, NY 11101
<b>DATE AND HOUR:</b>	<b>THURSDAY, SEPTEMBER 11, 2014 @ 2:00 pm</b>
	<b>LATE BIDS WILL NOT BE ACCEPTED</b>

**PRE-BID CONFERENCE:**

<b>PLACE</b>	Historic Richmond Town 441 Clarke Avenue Staten Island, NY 10306
<b>DATE AND HOUR</b>	<b>WEDNESDAY, SEPTEMBER 3, 2014 AT 11:00AM</b>
<b>MANDATORY OR OPTIONAL</b>	<b>OPTIONAL</b>

**BID SECURITY:**

Bid Security is required in the amount set forth below; provided, however, bid security is not required if the TOTAL BID PRICE set forth on the Bid Form is less than \$ 1,000,000.00.

- (1) Bond in an amount not less than 10% of the TOTAL BID PRICE set forth on the Bid Form, OR
- (2) Certified Check in an amount not less than 2% of the TOTAL BID PRICE set forth on the Bid Form.

**PERFORMANCE AND PAYMENT SECURITY:**

Required for Contracts in excess of \$1,000,000.00. Performance and Payment Security shall each be in an amount equal to 100% of the Contract Price

**AGENCY CONTACT PERSON:**

Lorraine Holley, 30-30 Thomson Avenue – First Floor, Long Island City, Queens, NY 11101  
 Telephone (718) 391-2200 or (718) 391-1016 Fax: (718) 391-2615



**BID BOOKLET  
PART B**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## SAFETY QUESTIONNAIRE

The bidder must include, with its bid, all information requested on this Safety Questionnaire. Failure to provide a completed and signed Safety Questionnaire at the time of bid opening may result in disqualification of the bid as non-responsive.

### 1. Bidder Information:

Company Name: \_\_\_\_\_

DDC Project Number: \_\_\_\_\_

Company Size:        \_\_\_\_\_ Ten (10) employees or less  
                              \_\_\_\_\_ Greater than ten (10) employees

Company has previously worked for DDC        \_\_\_\_\_ YES                                \_\_\_\_\_ NO

### 2. Type(s) of Construction Work

TYPE OF WORK	LAST 3 YEARS	THIS PROJECT
General Building Construction	_____	_____
Residential Building Construction	_____	_____
Nonresidential Building Construction	_____	_____
Heavy Construction, except building	_____	_____
Highway and Street Construction	_____	_____
Heavy Construction, except highways	_____	_____
Plumbing, Heating, HVAC	_____	_____
Painting and Paper Hanging	_____	_____
Electrical Work	_____	_____
Masonry, Stonework and Plastering	_____	_____
Carpentry and Floor Work	_____	_____
Roofing, Siding, and Sheet Metal	_____	_____
Concrete Work	_____	_____
Specialty Trade Contracting	_____	_____
Asbestos Abatement	_____	_____
Other (specify)	_____	_____

### 3. Experience Modification Rate:

The Experience Modification Rate (EMR) is a rating generated by the National Council of Compensation Insurance (NCCI). This rating is used to determine the contractor's premium for worker's compensation insurance. The contractor may obtain its EMR by contacting its insurance broker or the NCCI. If the contractor cannot obtain its EMR, it must submit a written explanation as to why.

The Contractor must indicate its Intrastate and Interstate EMR for the past three years. [Note: For contractors with less than three years of experience, the EMR will be considered to be 1.00].

YEAR	<u>INTRASTATE RATE</u>	<u>INTERSTATE RATE</u>
_____	_____	_____
_____	_____	_____
_____	_____	_____

If the Intrastate and/or Interstate EMR for any of the past three years is greater than 1.00, the contractor must attach, to this questionnaire, a written explanation for the rating and identify what corrective action was taken to correct the situation resulting in that rating.

**4. OSHA Information:**

YES       NO      Contractor has received a willful violation issued by OSHA or New York City Department of Buildings (NYCDOB) within the last three years.

YES       NO      Contractor has had an incident requiring OSHA notification within 8 hours (i.e., fatality, or hospitalization of three or more employees).

The Occupational Safety and Health Act (OSHA) of 1970 requires employers with ten or more employees, on a yearly basis to complete and maintain on file the form entitled "Log of Work-related Injuries and Illnesses". This form is commonly referred to as the OSHA 300 Log (OSHA 200 Log for 2001 and earlier).

The OSHA 300 Log must be submitted for the last three years for contractors with more than ten employees.

The Contractor must indicate the total number of hours worked by its employees, as reflected in payroll records for the past three years.

The contractor must submit the Incident Rate for Lost Time Injuries (the Incident Rate) for the past three years. The Incident Rate is calculated in accordance with the formula set forth below. For each given year, the total number of incidents is the total number of non-fatal injuries and illnesses reported on the OSHA 300 Log. The 200,000 hours represents the equivalent of 100 employees working forty hours a week, fifty weeks per year.

$$\text{Incident Rate} = \frac{\text{Total Number of Incidents} \times 200,000}{\text{Total Number of Hours Worked by Employees}}$$



YEAR	TOTAL NUMBERS OF HOURS WORKED BY EMPLOYEES	INCIDENT RATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

If the contractor's Incident Rate for any of the past three years is one point higher than the Incident Rate for the type of construction it performs (listed below), the contractor must attach, to this questionnaire, a written explanation for the relatively high rate.

General Building Construction	8.5
Residential Building Construction	7.0
Nonresidential Building Construction	10.2
Heavy Construction, except building	8.7
Highway and Street Construction	9.7
Heavy Construction, except highways	8.3
Plumbing, Heating, HVAC	11.3
Painting and Paper Hanging	6.9
Electrical Work	9.5
Masonry, Stonework and Plastering	10.5
Carpentry and Floor Work	12.2
Roofing, Siding, and Sheet Metal	10.3
Concrete Work	8.6
Specialty Trade Contracting	8.6

**5. Safety Performance on Previous DDC Project(s)**

YES  NO Contractor previously audited by the DDC Office of Site Safety.  
 DDC Project Number(s): \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_

YES  NO Accident on previous DDC Project(s).  
 DDC Project Number(s): \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_

YES  NO Fatality or Life-altering Injury on DDC Project(s) within the last three years.  
 [Examples of a life-altering injury include loss of limb, loss of a sense (e.g., sight, hearing), or loss of neurological function].  
 DDC Project Number(s): \_\_\_\_\_, \_\_\_\_\_, \_\_\_\_\_

Date: \_\_\_\_\_ By: \_\_\_\_\_  
 (Signature of Owner, Partner, Corporate Officer)

Title: \_\_\_\_\_

**THIS PAGE INTENTIONALLY LEFT BLANK**

## Pre-Award Process

The bidder is advised that as part of the pre-award review of its bid, it may be required to submit the information described in Sections (A) through (D) below. If required, the bidder must submit such information within five (5) business days following receipt of notification from DDC that it is among the low bidders. Such notification from DDC will be by facsimile or in writing and will specify the types of information which must be submitted.

**In the event the bidder fails to submit the required information within the specified time frame, its bid may be rejected as nonresponsive.**

\*\*\*\*\*

(A) **Project Reference Form:** If required, the bidder must complete and submit the Project Reference Form set forth on pages 28 through 30 of this Bid Booklet. The Project Reference Form consists of 3 parts: (1) Similar Contracts Completed by the Bidder, (2) Contracts Currently Under Construction by the Bidder, and (3) Pending Contracts Not Yet Started by the Bidder.

(B) **Copy of License:** If required, the bidder must submit a copy of the license under which the bidder will be performing the work. Such license must clearly show the following: (1) Name of the Licensee, (2) License Number, and (3) Expiration date of the License. A copy of the license will be required from bidders for the following contracts: Plumbing Work, Electrical Work and Asbestos Abatement.

(C) **Financial Information:** If required, the bidder must submit the financial information described below:

- (1) **Audited Financial Statements:** Financial statements (Balance Sheet and Income Statement) of the entity submitting the bid, as audited by an independent auditor licensed to practice as a certified public accountant (CPA). Audited financial statements for the three most recent fiscal years must be submitted. Each such financial statement must include the auditor's standard report.

If the bidder does not have audited financial statements, it must submit an affidavit attesting to the fact that the bidder does not have such statements. In addition, the bidder must submit the following documentation covering the three most recent fiscal years: signed federal tax returns, unaudited financial statements, and a "certified review letter" from a certified public accountant (CPA) verifying the unaudited financial statements.

Unless the most recent audited or unaudited financial statement was issued within ninety (90) days, the bidder must submit interim financial information that includes data on financial position and results of operation (income data) for the current fiscal year. Such information may be summarized on a monthly or quarterly basis or at other intervals.

- (2) **Schedule of Aged Accounts Receivable,** including portion due within ninety (90) days.

(D) **Project Specific Information:** If required, the bidder must submit the project specific information described below:

- (1) Statement indicating the number of years of experience the bidder has had and in what type of construction.
- (2) Resumes of all key personnel to be involved in the project, including the proposed project superintendent.
- (3) List of significant pieces of equipment expected to be used for the contract, and whether such equipment is owned or leased.

- (4) Description of work expected to be subcontracted, and to what firms, if known.
- (5) List of key material suppliers.
- (6) Preliminary bar chart time schedule
- (7) Contractor's expected means of financing the project. This should be based on the assumption that the contractor is required to finance 2X average monthly billings throughout the contract period.
- (8) Any other issues the contractor sees as impacting his ability to complete the project according to the contract.

In addition to the information described in Sections (A) through (D) above, the bidder shall submit such additional information as the Commissioner may require, including without limitation, an explanation or justification for specific unit price items.

The bidder is further advised that it may be required to attend a pre-award meeting with DDC representatives. If such a meeting is convened, the bidder will be advised as to any additional material to be provided.

**A. PROJECT REFERENCES – SIMILAR CONTRACTS COMPLETED BY THE BIDDER**

List all contracts substantially completed within the last 4 years similar to the contract being awarded, up to a maximum of 10, in descending order of date of substantial completion.

Project & Location	Contract Type	Contract Amount (\$000)	Date Completed	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

**B. PROJECT REFERENCES – CONTRACTS CURRENTLY UNDER CONSTRUCTION BY THE BIDDER**

List all contracts currently under construction even if they are not similar to the contract being awarded.

Project & Location	Contract Type	Contract Amount (\$000)	Subcontracted to Others (\$000)	Uncompleted Portion (\$000)	Date Scheduled to Complete	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

**C. PROJECT REFERENCES – PENDING CONTRACTS NOT YET STARTED BY THE BIDDER**

List all contracts awarded to or won by the bidder but not yet started.

Project & Location	Contract Type	Contract Amount (\$000)	Date Scheduled to Start	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

**THIS PAGE INTENTIONALLY LEFT BLANK**



**OFFICE OF THE MAYOR  
BUREAU OF LABOR SERVICES  
CONTRACT CERTIFICATE**

To be completed if the contract is less than \$1,000,000

Contractor: \_\_\_\_\_

Address: \_\_\_\_\_  
\_\_\_\_\_

Telephone Number: \_\_\_\_\_

Name and Title of Signatory: \_\_\_\_\_  
\_\_\_\_\_

Contracting Agency or Owner: \_\_\_\_\_

Project Number: \_\_\_\_\_

Proposed Contract Amount: \_\_\_\_\_

Description and Address of Proposed Contract: \_\_\_\_\_

Names of Subcontractors in the amount of 750,000 or more on this contract (if not known at this time, so state indicating that trades will be subcontracted):  
\_\_\_\_\_  
\_\_\_\_\_

I, (fill in name of person signing) \_\_\_\_\_,  
hereby affirm that I am authorized by the above-named contractor to certify that said contractor's proposed contract with the above-named owner or city agency is less than \$1,000,000. This affirmation is made in accordance with Executive Order No. 50 (1980) as amended and its implementing regulations.

\_\_\_\_\_  
Date

\_\_\_\_\_  
Signature

**WILLFUL OR FRAUDULENT FALSIFICATION OF ANY DATA OR INFORMATION SUBMITTED HERewith MAY RESULT IN THE TERMINATION OF ANY CONTRACT BETWEEN THE CITY AND THE BIDDER OR CONTRACTOR AND BAR THE BIDDER OR CONTRACTOR FROM PARTICIPATION IN ANY CITY CONTRACT FOR A PERIOD OF UP TO THREE YEARS. FURTHER, SUCH FALSIFICATION MAY RESULT IN CRIMINAL PROSECUTION.**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## VENDEX COMPLIANCE

(A) **Vendex Fees:** Pursuant to Procurement Policy Board Rule 2-08(f)(2), the contractor will be charged a fee for the administration of the VENDEX system, including the Vendor Name Check process, if a Vendor Name Check review is required to be conducted by the Department of Investigation. The contractor shall also be required to pay the applicable required fees for any of its subcontractors for which Vendor Name Check reviews are required. The fee(s) will be deducted from payments made to the contractor under the contract. For contracts with an estimated value of less than or equal to \$1,000,000, the fee will be \$175 per Vendor Name Check review. For contracts with an estimated value of greater than \$1,000,000, the fee will be \$350 per Vendor Name Check review.

(B) **Confirmation of Vendex Compliance:** The Bidder shall submit this Confirmation of Vendex Compliance to the Department of Design and Construction, Contracts Section, 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101.

**Bid Information:** The Bidder shall complete the bid information set forth below.

Name of Bidder: \_\_\_\_\_  
Bidder's Address: \_\_\_\_\_  
Bidder's Telephone Number: \_\_\_\_\_  
Bidder's Fax Number: \_\_\_\_\_  
Date of Bid Opening: \_\_\_\_\_  
Project ID: \_\_\_\_\_

**Vendex Compliance:** To demonstrate compliance with Vendex requirements, the Bidder shall complete either Section (1) or Section (2) below, whichever applies.

(1) **Submission of Vendex Questionnaires to MOCS:** By signing in the space provided below, the Bidder certifies that as of the date specified below, the Bidder has submitted Vendex Questionnaires to the Mayor's Office of Contract Services, Attn: VENDEX, 253 Broadway, 9<sup>th</sup> Floor, New York, New York 10007.

Date of Submission: \_\_\_\_\_

By: \_\_\_\_\_  
(Signature of Partner or corporate officer)

Print Name: \_\_\_\_\_

(2) **Submission of Certification of No Change to DDC:** By signing in the space provided below, the Bidder certifies that it has read the instructions in a "Vendor's Guide to Vendex" and that such instructions do not require the Bidder to submit Vendex Questionnaires. The Bidder has completed **TWO ORIGINALS** of the Certification of No Change set forth on the next page of this Bid Booklet.

By: \_\_\_\_\_  
(Signature of Partner or corporate officer)

Print Name: \_\_\_\_\_

**THIS PAGE INTENTIONALLY LEFT BLANK**

**DIRECTIONS: Please execute two originals (both with original signature).  
Please forward directly to the agency (not M.O.C.S.).**



## **Certificate of No Change Form**

- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, \_\_\_\_\_, being duly sworn, state that I have read  
*Enter Your Name*

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

### **Vendor Questionnaire *This section is required.***

*This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.*

Name of Submitting Entity: \_\_\_\_\_

Vendor's Address: \_\_\_\_\_

Vendor's EIN or TIN: \_\_\_\_\_ Requesting Agency: \_\_\_\_\_

Are you submitting this Certification as a parent? (Please circle one)      Yes      No

Signature date on the last full vendor questionnaire signed for the submitting vendor: \_\_\_\_\_

Signature date on change submission for the submitting vendor: \_\_\_\_\_

# Principal Questionnaire

*This section refers to the most recent principal questionnaire submissions.*



Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change
1		
2		
3		
4		
5		
6		

Check if additional changes were submitted and attach a document with the date of additional submissions.

## **Certification** *This section is required.*

*This form must be signed and notarized. Please complete this twice. Copies will not be accepted.*

### **Certified By:**

\_\_\_\_\_  
*Name (Print)*

\_\_\_\_\_  
*Title*

\_\_\_\_\_  
*Name of Submitting Entity*

\_\_\_\_\_  
*Signature*

\_\_\_\_\_  
*Date*

### **Notarized By:**

\_\_\_\_\_  
*Notary Public*

\_\_\_\_\_  
*County License Issued*

\_\_\_\_\_  
*License Number*

Sworn to before me on: \_\_\_\_\_  
*Date*

**DIRECTIONS: Please execute two originals (both with original signature).  
Please forward directly to the agency (not M.O.C.S.).**

## **Certificate of No Change Form**



- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, \_\_\_\_\_, being duly sworn, state that I have read  
*Enter Your Name*

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

### **Vendor Questionnaire *This section is required.***

*This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.*

Name of Submitting Entity: \_\_\_\_\_

Vendor's Address: \_\_\_\_\_

Vendor's EIN or TIN: \_\_\_\_\_ Requesting Agency: \_\_\_\_\_

Are you submitting this Certification as a parent? (Please circle one)      Yes      No

Signature date on the last full vendor questionnaire signed for the submitting vendor: \_\_\_\_\_

Signature date on change submission for the submitting vendor: \_\_\_\_\_

# Principal Questionnaire

*This section refers to the most recent principal questionnaire submissions.*



Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change
1		
2		
3		
4		
5		
6		

Check if additional changes were submitted and attach a document with the date of additional submissions.

## Certification *This section is required.*

*This form must be signed and notarized. Please complete this twice. Copies will not be accepted.*

### Certified By:

\_\_\_\_\_  
*Name (Print)*

\_\_\_\_\_  
*Title*

\_\_\_\_\_  
*Name of Submitting Entity*

\_\_\_\_\_  
*Signature*

\_\_\_\_\_  
*Date*

### Notarized By:

\_\_\_\_\_  
*Notary Public*

\_\_\_\_\_  
*County License Issued*

\_\_\_\_\_  
*License Number*

Sworn to before me on: \_\_\_\_\_  
*Date*



## IRAN DIVESTMENT ACT COMPLIANCE RIDER

### FOR NEW YORK CITY CONTRACTORS

The Iran Divestment Act of 2012, effective as of April 12, 2012, is codified at State Finance Law ("SFL") §165-a and General Municipal Law ("GML") §103-g. The Iran Divestment Act, with certain exceptions, prohibits municipalities, including the City, from entering into contracts with persons engaged in investment activities in the energy sector of Iran. Pursuant to the terms set forth in SFL §165-a and GML §103-g, a person engages in investment activities in the energy sector of Iran if:

- (a) The person provides goods or services of twenty million dollars or more in the energy sector of Iran, including a person that provides oil or liquefied natural gas tankers, or products used to construct or maintain pipelines used to transport oil or liquefied natural gas, for the energy sector of Iran; or
- (b) The person is a financial institution that extends twenty million dollars or more in credit to another person, for forty-five days or more, if that person will use the credit to provide goods or services in the energy sector in Iran and is identified on a list created pursuant to paragraph (b) of subdivision three of Section 165-a of the State Finance Law and maintained by the Commissioner of the Office of General Services.

A bid or proposal shall not be considered for award nor shall any award be made where the bidder or proposer fails to submit a signed and verified bidder's certification.

Each bidder or proposer must certify that it is not on the list of entities engaged in investment activities in Iran created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. In any case where the bidder or proposer cannot certify that they are not on such list, the bidder or proposer shall so state and shall furnish with the bid or proposal a signed statement which sets forth in detail the reasons why such statement cannot be made. The City of New York may award a bid to a bidder who cannot make the certification on a case by case basis if:

- (1) The investment activities in Iran were made before the effective date of this section (i.e., April 12, 2012), the investment activities in Iran have not been expanded or renewed after the effective date of this section and the person has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran: or
- (2) The City makes a determination that the goods or services are necessary for the City to perform its functions and that, absent such an exemption, the City would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

**BIDDER'S CERTIFICATION OF COMPLIANCE WITH  
IRAN DIVESTMENT ACT**

Pursuant to General Municipal Law §103-g, which generally prohibits the City from entering into contracts with persons engaged in investment activities in the energy sector of Iran, the bidder/proposer submits the following certification:

[Please Check One]

**BIDDER'S CERTIFICATION**

- By submission of this bid or proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief, that each bidder/proposer is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law.
- I am unable to certify that my name and the name of the bidder/proposer does not appear on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. I have attached a signed statement setting forth in detail why I cannot so certify.

Dated: \_\_\_\_\_, New York  
\_\_\_\_\_, 20\_\_

\_\_\_\_\_  
SIGNATURE

\_\_\_\_\_  
PRINTED NAME

\_\_\_\_\_  
TITLE

Sworn to before me this  
\_\_\_\_ day of \_\_\_\_\_, 20\_\_

\_\_\_\_\_  
Notary Public

Dated:

**CITY OF NEW YORK**

**DIVISION OF LABOR SERVICES**

**CONSTRUCTION EMPLOYMENT REPORT**

**THIS PAGE INTENTIONALLY LEFT BLANK**

The City of New York Department of Small Business Services  
 Division of Labor Services Contract Compliance Unit  
 110 William Street, New York, New York 10038  
 Phone: (212) 513 - 6323  
 Fax: (212) 618-8879

**CONSTRUCTION EMPLOYMENT REPORT**

**GENERAL INFORMATION**

1. Your contractual relationship in this contract is: Prime contractor  Subcontractor
- 1a. Are M/WBE goals attached to this project? Yes  No
2. Please check one of the following if your firm would like information on how to certify with the City of New York as a:
 

<input type="checkbox"/> Minority Owned Business Enterprise	<input type="checkbox"/> Locally Based Business Enterprise
<input type="checkbox"/> Women Owned Business Enterprise	<input type="checkbox"/> Emerging Business Enterprise
<input type="checkbox"/> Disadvantaged Business Enterprise	
- 2a. If you are certified as an **MBE, WBE, LBE, EBE** or **DBE**, what city/state agency are you certified with? \_\_\_\_\_ Are you DBE certified? Yes  No
3. Please indicate if you would like assistance from SBS in identifying certified M/WBEs for contracting opportunities: Yes  No
4. Is this project subject to a project labor agreement? Yes  No
5. Are you a Union contractor? Yes  No  If yes, please list which local(s) you affiliated with \_\_\_\_\_
6. Are you a Veteran owned company? Yes  No

**PART I: CONTRACTOR/SUBCONTRACTOR INFORMATION**

7. \_\_\_\_\_  
Employer Identification Number or Federal Tax I.D. Email Address
8. \_\_\_\_\_  
Company Name
9. \_\_\_\_\_  
Company Address and Zip Code
10. \_\_\_\_\_  
Chief Operating Officer Telephone Number
11. \_\_\_\_\_  
Designated Equal Opportunity Compliance Officer Telephone Number  
(If same as Item #10, write "same")
12. \_\_\_\_\_  
Name of Prime Contractor and Contact Person  
(If same as Item #8, write "same")

13. Number of employees in your company: \_\_\_\_\_

14. Contract information:

(a) \_\_\_\_\_ (b) \_\_\_\_\_  
Contracting Agency (City Agency) Contract Amount

(c) \_\_\_\_\_ (d) \_\_\_\_\_  
Procurement Identification Number (PIN) Contract Registration Number (CT#)

(e) \_\_\_\_\_ (f) \_\_\_\_\_  
Projected Commencement Date Projected Completion Date

(g) Description and location of proposed contract:

\_\_\_\_\_  
\_\_\_\_\_

15. Has your firm been reviewed by the Division of Labor Services (DLS) within the past 36 months and issued a Certificate of Approval? Yes\_\_\_ No\_\_\_

If yes, attach a copy of certificate.

16. Has DLS within the past month reviewed an Employment Report submission for your company and issued a Conditional Certificate of Approval? Yes\_\_\_ No\_\_\_

If yes, attach a copy of certificate.

**NOTE: DLS WILL NOT ISSUE A CONTINUED CERTIFICATE OF APPROVAL IN CONNECTION WITH THIS CONTRACT UNLESS THE REQUIRED CORRECTIVE ACTIONS IN PRIOR CONDITIONAL CERTIFICATES OF APPROVAL HAVE BEEN TAKEN.**

17. Has an Employment Report already been submitted for a different contract (not covered by this Employment Report) for which you have not yet received compliance certificate? Yes\_\_\_ No\_\_\_ If yes,

Date submitted: \_\_\_\_\_

Agency to which submitted: \_\_\_\_\_

Name of Agency Person: \_\_\_\_\_

Contract No: \_\_\_\_\_

Telephone: \_\_\_\_\_

18. Has your company in the past 36 months been audited by the United States Department of Labor, Office of Federal Contract Compliance Programs (OFCCP)? Yes\_\_\_ No\_\_\_

If yes,

(a) Name and address of OFCCP office.

\_\_\_\_\_  
\_\_\_\_\_

(b) Was a Certificate of Equal Employment Compliance issued within the past 36 months?

Yes\_\_\_ No\_\_\_

If yes, attach a copy of such certificate.

(c) Were any corrective actions required or agreed to? Yes\_\_\_ No\_\_\_

If yes, attach a copy of such requirements or agreements.

(d) Were any deficiencies found? Yes\_\_\_ No\_\_\_

If yes, attach a copy of such findings.

19. Is your company or its affiliates a member or members of an employers' trade association which is responsible for negotiating collective bargaining agreements (CBA) which affect construction site hiring? Yes\_\_\_ No\_\_\_

If yes, attach a list of such associations and all applicable CBA's.

## PART II: DOCUMENTS REQUIRED

20. For the following policies or practices, attach the relevant documents (e.g., printed booklets, brochures, manuals, memoranda, etc.). If the policy(ies) are unwritten, attach a full explanation of the practices. See instructions.

\_\_\_ (a) Health benefit coverage/description(s) for all management, nonunion and union employees (whether company or union administered)

\_\_\_ (b) Disability, life, other insurance coverage/description

\_\_\_ (c) Employee Policy/Handbook

\_\_\_ (d) Personnel Policy/Manual

\_\_\_ (e) Supervisor's Policy/Manual

\_\_\_ (f) Pension plan or 401k coverage/description for all management, nonunion and union employees, whether company or union administered

\_\_\_ (g) Collective bargaining agreement(s).

\_\_\_ (h) Employment Application(s)

\_\_\_ (i) Employee evaluation policy/form(s).

\_\_\_ (j) Does your firm have medical and/or non-medical (i.e. education, military, personal, pregnancy, child care) leave policy?

21. To comply with the Immigration Reform and Control Act of 1986 when and of whom does your firm require the completion of an I-9 Form?

- (a) Prior to job offer Yes \_\_\_ No \_\_\_
- (b) After a conditional job offer Yes \_\_\_ No \_\_\_
- (c) After a job offer Yes \_\_\_ No \_\_\_
- (d) Within the first three days on the job Yes \_\_\_ No \_\_\_
- (e) To some applicants Yes \_\_\_ No \_\_\_
- (f) To all applicants Yes \_\_\_ No \_\_\_
- (g) To some employees Yes \_\_\_ No \_\_\_
- (h) To all employees Yes \_\_\_ No \_\_\_

22. Explain where and how completed I-9 Forms, with their supportive documentation, are maintained and made accessible.

\_\_\_\_\_

23. Does your firm or any of its collective bargaining agreements require job applicants to take a medical examination? Yes \_\_\_ No \_\_\_

If yes, is the medical examination given:

- (a) Prior to a job offer Yes \_\_\_ No \_\_\_
- (b) After a conditional job offer Yes \_\_\_ No \_\_\_
- (c) After a job offer Yes \_\_\_ No \_\_\_
- (d) To all applicants Yes \_\_\_ No \_\_\_
- (e) Only to some applicants Yes \_\_\_ No \_\_\_

If yes, list for which applicants below and attach copies of all medical examination or questionnaire forms and instructions utilized for these examinations.

\_\_\_\_\_

24. Do you have a written equal employment opportunity (EEO) policy? Yes \_\_\_ No \_\_\_

If yes, list the document(s) and page number(s) where these written policies are located.

\_\_\_\_\_

25. Does the company have a current affirmative action plan(s) (AAP)

\_\_\_\_\_  
Minorities and Women

\_\_\_\_\_  
Individuals with handicaps

\_\_\_\_\_  
Other. Please specify \_\_\_\_\_

26. Does your firm or collective bargaining agreement(s) have an internal grievance procedure with respect to EEO complaints? Yes \_\_\_ No \_\_\_

If yes, please attach a copy of this policy.

If no, attach a report detailing your firm's unwritten procedure for handling EEO complaints.



27. Has any employee, within the past three years, filed a complaint pursuant to an internal grievance procedure or with any official of your firm with respect to equal employment opportunity? Yes\_\_\_ No\_\_\_

If yes, attach an internal complaint log. See instructions.

28. Has your firm, within the past three years, been named as a defendant (or respondent) in any administrative or judicial action where the complainant (plaintiff) alleged violation of any anti-discrimination or affirmative action laws? Yes\_\_\_ No\_\_\_

If yes, attach a log. See instructions.

29. Are there any jobs for which there are physical qualifications? Yes\_\_\_ No\_\_\_

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

---

30. Are there any jobs for which there are age, race, color, national origin, sex, creed, disability, marital status, sexual orientation, or citizenship qualifications? Yes\_\_\_ No\_\_\_

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

---

**SIGNATURE PAGE**

I, (print name of authorized official signing) \_\_\_\_\_ hereby certify that the information submitted herewith is true and complete to the best of my knowledge and belief and submitted with the understanding that compliance with New York City's equal employment requirements, as contained in Chapter 56 of the City Charter, Executive Order No. 50 (1980), as amended, and the implementing Rules and Regulations, is a contractual obligation. I also agree on behalf of the company to submit a certified copy of payroll records to the Division of Labor Services on a monthly basis.

\_\_\_\_\_  
Contractor's Name

\_\_\_\_\_  
Name of person who prepared this Employment Report Title

\_\_\_\_\_  
Name of official authorized to sign on behalf of the contractor Title

\_\_\_\_\_  
Telephone Number

\_\_\_\_\_  
Signature of authorized official Date

If contractors are found to be underutilizing minorities and females in any given trade based on Chapter 56 Section 3H, the Division of Labor Services reserves the right to request the contractor's workforce data and to implement an employment program.

Contractors who fail to comply with the above mentioned requirements or are found to be in noncompliance may be subject to the withholding of final payment.

Willful or fraudulent falsifications of any data or information submitted herewith may result in the termination of the contract between the City and the bidder or contractor and in disapproval of future contracts for a period of up to five years. Further, such falsification may result in civil and/or criminal prosecution.

To the extent permitted by law and consistent with the proper discharge of DLS' responsibilities under Charter Chapter 56 of the City Charter and Executive Order No. 50 (1980) and the implementing Rules and Regulations, all information provided by a contractor to DLS shall be confidential.

**Only original signatures accepted.**

Sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_ 20 \_\_\_\_\_

\_\_\_\_\_  
Notary Public Authorized Signature Date

**FORM A CONTRACT BID INFORMATION: USE OF SUBCONTRACTORS/TRADES**

1. Do you plan to subcontract work on this contract? Yes \_\_\_ No \_\_\_
2. If yes, complete the chart below.

**NOTE: All proposed subcontractors with a subcontract in excess of \$750,000 must complete an Employment Report for review and approval before the contract may be awarded and work commences.**

SUBCONTRACTOR'S NAME*	OWNERSHIP (ENTER APPROPRIATE CODE LETTERS BELOW)	WORK TO BE PERFORMED BY SUBCONTRACTOR	TRADE PROJECTED FOR USE BY SUBCONTRACTOR	PROJECTED DOLLAR VALUE OF SUBCONTRACT

**\*If subcontractor is presently unknown, please enter the trade (craft name).**

**OWNERSHIP CODES**

- W: White
- B: Black
- H: Hispanic
- A: Asian
- N: Native American
- F: Female

**FORM B: PROJECTED WORKFORCE**

**TRADE CLASSIFICATION CODES**

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice
- (TRN) Trainee

For each trade to be engaged by your company for this project, enter the projected workforce for Males and Females by trade classification on the charts below.

Trade:

	MALES						FEMALES															
	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)		(10)			
	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	White Non Hisp.	
J																						
H																						
A																						
TRN																						
TOT																						

Total (Col. #1-10):

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):

Total Female  
(Col. #6 - 10):

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

**FORM 10 PROJECTED WORKFORCE**

Trade: \_\_\_\_\_

Union Affiliation, if applicable \_\_\_\_\_

Total (Col. #1-10): \_\_\_\_\_

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10): \_\_\_\_\_

Total Female  
(Col. #6 - 10): \_\_\_\_\_

**MALES**

(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.

J  
H  
A  
TRN  
TOT

**FEMALES**

(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

---



---

**FORM C: CURRENT WORKFORCE**

**TRADE CLASSIFICATION CODES**

- (J) Journeylevel Workers
- (H) Helper
- (A) Apprentice
- (TRN) Trainee
- (TOT) Total by Column

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade:	MALES						FEMALES			
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J										
H										
A										
TRN										
TOT										

Total (Col. #1-10):

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10):

Total Female  
(Col. #6 - 10):

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

**FORM C: CURRENT WORKFORCE**

Trade: \_\_\_\_\_

Union Affiliation, if applicable \_\_\_\_\_

Total (Col. #1-10): \_\_\_\_\_

Total Minority, Male & Female  
(Col. #2,3,4,5,7,8,9, & 10): \_\_\_\_\_

Total Female  
(Col. #6 - 10): \_\_\_\_\_

	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3)	(4)	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J										
H										
A										
TRN										
TOT										

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

---



---





FMS ID: PVC341-M



---

**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE                      LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000                  WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

---

**Contract for Furnishing all Labor and Material Necessary and Required for:**

**CONTRACT NO. 1              GENERAL CONSTRUCTION WORK**

# Historic Richmond Town Utilities Upgrade

**LOCATION:**                      441 Clarke Avenue  
**BOROUGH:**                    Staten Island 10306  
**CITY OF NEW YORK**

---

Contractor \_\_\_\_\_

Dated \_\_\_\_\_, 20\_\_\_\_

---

Entered in the Comptroller's Office

First Assistant Bookkeeper \_\_\_\_\_

Dated \_\_\_\_\_, 20\_\_\_\_





**PROJECT ID: PVC341-M**

**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE  
LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000  
WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

**VOLUME 2 OF 3**

**PROJECT LABOR AGREEMENT  
INFORMATION FOR BIDDERS  
CONTRACT  
PERFORMANCE AND PAYMENT BONDS  
SCHEDULE OF PREVAILING WAGES  
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS  
NECESSARY AND REQUIRED FOR THE PROJECT

**Historic Richmond Town Utilities  
Upgrade**

**LOCATION:  
BOROUGH:  
CITY OF NEW YORK**

**441 Clarke Avenue  
Staten Island 10306**

**CONTRACT NO. 1**

**GENERAL CONSTRUCTION WORK**

**Dept of Cultural Affairs**

**Stantec Consulting Services, Inc.**

**Date: June 9, 2014**



**14-123**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE  
LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000  
WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

**VOLUME 2 OF 3**

**PROJECT LABOR AGREEMENT  
INFORMATION FOR BIDDERS  
CONTRACT  
PERFORMANCE AND PAYMENT BONDS  
SCHEDULE OF PREVAILING WAGES  
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS  
NECESSARY AND REQUIRED FOR THE PROJECT



# NOTICE TO BIDDERS

Please be advised the Project Labor Agreement (PLA) attached and incorporated in this Invitation for Bids has been extended to apply to contracts let prior to December 31, 2014, including this contract. Other than extending the expiration date, all other terms of the PLA continue to apply in full force and effect.

## NOTICE:

### THIS CONTRACT IS NOT SUBJECT TO THE REQUIREMENTS OF THE WICKS LAW FOR SEPARATE PRIME CONTRACTORS

This contract is subject to a Project Labor Agreement ("PLA"). In accordance with the Labor Law, the requirements of the Wicks Law for separate prime contractors do not apply to any project that is covered by a PLA. Accordingly, the requirements of the Wicks Law for separate prime contractors do not apply to this Project. However, the Contract Documents for this Project (General Conditions, Drawings and Specifications) were prepared as if the requirements of the Wicks Law for separate prime contractors did apply. To correct this situation, the bidder is advised that the Contract Documents are revised as set forth below.

- (A) Delete any and all references to separate responsibilities, separate specifications, separate drawings and/or separate contracts for the four subdivisions of the work listed below:
- General Construction Work (Contract No. 1)
  - Plumbing Work (Contract No. 2)
  - HVAC & Fire Protection Work (Contract No. 3)
  - Electrical Work (Contract No. 4)
- (B) Revise all such references to indicate that:
- The Project consists of a single contract, the Contract for General Construction Work.
  - All responsibilities and obligations in the Contract Documents assigned to the separate Contractors for the four subdivisions of the work listed above are the responsibility of the Contractor for General Construction Work.
  - The Contractor for General Construction Work is responsible for the performance of all required work for the Project as set forth in the Contract Documents, including all responsibilities and obligations assigned to the separate Contractors for the four subdivisions of the work listed above.
- (C) Revise any and all references to Contracts Nos. 2, 3 and 4 to refer to Contract No. 1.
- (D) Revise the specifications for plumbing work to require Contractor for General Construction Work to engage a Licensed Plumber to perform the required plumbing work.
- (E) Revise the specifications for electrical work to require Contractor for General Construction Work to engage a Licensed Electrician to perform the required electrical work.

## NOTICE:

# THIS CONTRACT IS SUBJECT TO A PROJECT LABOR AGREEMENT

This contract is subject to the attached Project Labor Agreement ("PLA") entered into between the City and the Building and Construction Trades Council of Greater New York ("BCTC"), affiliated Local Unions. By submitting a bid, the Contractor agrees that if awarded the Contract the PLA is binding on the Contractor and all subcontractors of all tiers. The bidder to be awarded the contract will be required to execute the attached Letter of Assent prior to award. Contractor shall include in any subcontract a requirement that the subcontractor, and sub-subcontractors of all tiers, become signatory to and bound to the PLA with respect to the subcontracted work. Contractor will also be required to have all subcontractors of all tiers execute the attached Letter of Assent prior to such subcontractors performing any work on the Project. Bidders are advised that the City of New York and City agencies have entered into multiple PLAs. The terms of each PLA, while similar, are not identical. All bidders should carefully read the entire PLA that governs this Contract.

To the extent that the terms of the PLA conflict with any other terms of the invitation for bids, including the Standard Construction Contract, the terms of the PLA shall govern. For example, the PLA section that authorizes the scheduling of a four-day work, ten hours per day on straight time at the commencement of the job, PLA Article 12, section 1, overrides the Standard Construction Contract's provision concerning a five-day work week with a maximum of eight hours in a day, Standard Construction Contract Article 37.2.1. Where, however, the invitation for bids, including the Standard Construction Contract, requires the approval of the City/Department, the PLA does not supersede or eliminate that requirement.

In addition to the various provisions regarding work rules, Contractors should take special note of the requirement that Contractors and Subcontractors make payments to designated employee benefit funds. See PLA Article 11, Section 2. The PLA also contains provisions for what occurs when a contractor or a subcontractor fails to make required payments into the benefit funds, including potentially the direct payment by the City to the benefit fund of monies owed and corresponding withholding of payments to the Contractor. See PLA Article 11, Section 2. The City strongly advises Contractors to read these provisions carefully and to include appropriate provisions in subcontracts addressing these possibilities.

This Contract is subject to the apprenticeship requirements of Labor Law §222 and to apprenticeship requirements established by the Department pursuant to Labor Law §816-b. Please be advised that the involved trades have apprenticeship programs that meet the statutory requirements of Labor Law §222(e) and the requirements set by the Department pursuant to Labor Law §816-b, contractors and subcontractors who agree to perform the Work pursuant to the PLA are participating in such apprenticeship programs within the meaning of Labor Law §222(e) and the Department's directive.

If this Contract is subject to the Minority-Owned and Women-Owned Business Enterprise ("M/WBE") program created by Local Law 129, the specific requirements of M/WBE participation for this Contract are set forth in Schedule B entitled the "Subcontractor Utilization Plan", and are detailed in a separate Notice to Prospective Contractors included with this bid package. If such requirements are included with this Contract, the City strongly advises Contractors to read those provisions, as well as PLA Article 4, Section 2(C), carefully. A list of M/WBE firms may be obtained from the DSBS website at [www.nyc.gov/buycertified](http://www.nyc.gov/buycertified), by emailing DSBS at [buyer@sbs.nyc.gov](mailto:buyer@sbs.nyc.gov), by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting [www.nyc.gov/getcertified](http://www.nyc.gov/getcertified), emailing [MWBE@sbs.nyc.gov](mailto:MWBE@sbs.nyc.gov), or calling the DSBS certification helpline at (212) 513-6311.

The local collective bargaining agreements (CBAs) that are incorporated into the PLA as PLA Schedule A Agreements are available on computer disk from the Department's Contract Officer upon the request of any prospective bidder. Please note that the "PLA Schedule A" is distinct from the Department's Schedule A that is a part of this invitation for bids.

A contact list for the participating unions is set forth after the FAQs.

Below are answers to frequently asked questions (FAQs) about this PLA:

**Q1. Does a contractor need to be signatory with the unions in the NYC Building and Construction Trades Council in order to bid on projects under the PLA?**

A. No, any contractor may bid by signing and agreeing to the terms of the PLA. The contractor need not be signatory with these unions by any other labor agreement or for any other project.

**Q2. Does a contractor agreeing to the PLA and signing the Letter of Assent create a labor agreement with these unions outside of the project covered by the PLA?**

A. No, the PLA applies only to those projects that the Contractor agrees to perform under the PLA and makes no labor agreement beyond those projects.

**Q3. Does the PLA affect the subcontractors that a bidder may utilize on the project?**

A. Subject to the Department's approval of subcontractors pursuant to Article 17 of the Standard Construction Contract, a contractor may use any subcontractor, union or non-union, as long as the subcontractor signs and agrees to the terms of the PLA.

**Q4. Are bidders required to submit Letters of Assent signed by proposed subcontractors with their bid in order to be found responsive?**

A. No, bidders do not have to submit signed Letters of Assent from their subcontractors with their bid. Subcontractors, however, will be required to sign the letter of Assent prior to being approved by the Department.

**Q5. May a contractor or subcontractor use any of its existing employees to perform this work?**

A. Generally labor will be referred to the contractor from the respective signatory local unions. See PLA Article 4. However, contractors and subcontractors may continue to use up to 12% of their existing, qualifying labor force for this work, in accordance with the terms of PLA Article 4, Section 2B. Certified MWBEs for which participation goals are set pursuant to NYC Administrative Code §6-129 that are not signatory to any Schedule A CBAs may use their existing employees for the 2<sup>nd</sup>, 4<sup>th</sup>, 6<sup>th</sup> and 8<sup>th</sup> employee needed on the job if their contracts are valued at or under \$500,000. For contracts valued at above \$500,000 but under \$1,000,000, such certified MWBEs may use their own employees for the 2<sup>nd</sup>, 5<sup>th</sup> and 8<sup>th</sup> employees needed on the job in accordance with the provisions of PLA Article 4, Section 2C. If additional workers are needed by these MWBEs, the additional workers will be referred to the contractor from the signatory local unions subject to the contractor's right to meet 12% of the additional needs with its existing, qualifying employees.

**Q6. Must the City set MWBE participation goals for the particular project or contract in order for a certified MWBE to utilize the provisions of PLA Article 4, Section 2C?**

A. No. PLA Article 4, Section 2(C) specifies what categories of MWBEs are eligible to take advantage of this provision (i.e., those MWBEs for which the City is authorized to set participation goals under §6-129). For purposes of section 2(C), it is not necessary for the project to be subject to §6-129 or for the City to have actually set participation goals for the particular contract or project. The result is the same where a projects receives State funding and therefore is subject to the requirements of Article 15-A of the Executive Law.

**Q7. May a contractor bring in union members from locals that are not signatory unions?**

A. Referrals will be from the respective signatory locals and/or locals listed in schedule A of the PLA. Contractors may utilize 'traveler provisions' contained in the local collective bargaining agreements (local CBAs) where such provisions exist and/or in accordance with the provisions of PLA Article 4, Section 2.

**Q8. Does a non-union employee working under the PLA automatically become a union member?**

A. No, the non-union employee does not automatically become a union member by working on a project covered by the PLA. Non-union employees working under the PLA are subject to the union security provisions (i.e., union dues/agency shop fees) of the local CBAs while on the project. These employees will be enrolled in the appropriate benefit plans and earn credit toward various union benefit programs. See PLA Article 4, Section 6 and Article 11.

**Q9. Are all contractors and subcontractors working under the PLA, including non-union contractors and contractors signatory to collective bargaining agreements with locals other than those that are signatories to the PLA, required to make contributions to designated employee benefit funds?**

A. Contractors and subcontractors working under the PLA will be required to contribute on behalf of all employees covered by the PLA to established jointly trustee employee benefit funds designated in the Schedule A CBAs and required to be paid on public works under any applicable prevailing wage law. See PLA Article 11, Section 2. The Agency may withhold from amounts due the contractor any amounts required to be paid, but not actually paid into any such fund by the contractor or a subcontractor. See PLA Article 11, Section 2 C.

**Q10. What happens if a contractor or subcontractor fails to make a required payment to a designated employee benefit fund?**

A. The PLA sets forth a process for unions to address a contractor or a subcontractor's failure to make required payments. The process includes potentially the direct payment by the City to the benefit fund of monies owed and the corresponding withholding of payments to the Contractor. See PLA Article 11, Section 2. The City strongly advises Contractors to read these provisions carefully and to include appropriate provisions in subcontracts addressing these possibilities.

**Q11. Does signing on to the PLA satisfy the Apprenticeship Requirements established for this bid?**

A. Yes. By agreeing to perform the Work subject to the PLA, the bidder demonstrates compliance with the apprenticeship requirements imposed by this invitation for Bids.

**Q12. Does the PLA provide a standard work day across all the signatory trades?**

A. Yes, all signatory trades will work an eight (8) hour day, Monday through Friday with a day shift at straight time as the standard work week. The PLA also permits a contractor to schedule a four day [within Monday through Friday] work week, ten (10) hours per day at straight time if announced at the commencement of the project. See PLA Article 12, Section 1. This is an example where the terms of the PLA override provisions of the Standard Construction Contract (compare with section 37.2 of the Standard Construction Contract).

**Q13. Does the PLA create a common holiday schedule for all the signatory trades?**

A. Yes, the PLA recognizes eight (8) common holidays. See PLA Article 12, Section 4.

**Q14. Does the PLA provide for a standard policy for 'shift work' across all signatory trades?**

A. Yes, second and third shifts may be worked with a standard 5% premium pay. In addition, a day shift does not have to be scheduled in order to work the second and third shifts at the 1.05 hourly pay rate. See PLA Article 12, Section 3.

**Q15. May the Contractor schedule overtime work, including work on a weekend?**

A. Yes, the PLA permits the Contractor to schedule overtime work, including work on the weekends. See PLA Article 12, Sections 2, 3, and 5. To the extent that the Agency's approval is required before a Contractor may schedule or be paid for overtime, that approval is still required notwithstanding the PLA language.

**Q16. Are overtime payments affected by the PLA?**

A. Yes, all overtime pay incurred Monday through Saturday will be at time and one half (1 ½). There will be no stacking or pyramiding of overtime pay under any circumstances. See PLA Article 12, Section 2. Sunday and holiday overtime will be paid according to each trades CBA.



Q17. Are there special provisions for Saturday work when a day is 'lost' during the week due to weather, power failure or other emergency?

A. Yes, when this occurs the Contractor may schedule Saturday work at weekday rates. See PLA Article 12, Section 5.

Q18. Does the PLA contain special provisions for the manning of Temporary Services?

A. Yes. Where temporary services are required by specific request of the agency or construction manager, they shall be provided by the contractor's existing employees during working hours in which a shift is scheduled for employees of the contractor. The need for temporary services during non-working hours will be determined by the agency or construction manager. There will be no stacking of trades on temporary services. See PLA Article 15.

Q19. What do the workers get paid when work is terminated early in a day due to inclement weather or otherwise cut short of 8 hours?

A. The PLA provides that employees who report to work pursuant to regular schedule and not given work will be paid two hours of straight time. Work terminated early for severe weather or emergency conditions will be paid only for time actually worked. In other instances where work is terminated early, the worker will be paid for a full day. See PLA Article 12, Sections 6 and 8.

Q20. Should a local collective bargaining agreement [local CBA] expire during the project will a work stoppage occur on a project subject to the PLA?

A. No. All the signatory unions are bound by the 'no strike' agreement as to the PLA work. Work will continue under the PLA and the otherwise expired local CBA(s) until the new local CBA(s) are negotiated and in effect. See PLA Articles 7 and 19.

Q21. May a contractor working under the PLA be subject to a strike or other boycott activity by a signatory union at another site while the contractor is a signatory to the PLA?

A. Yes. The PLA applies ONLY to work under the PLA and does not regulate labor relations at other sites even if those sites are in close proximity to PLA work.

Q22. If a contractor has worked under other PLAs in the New York City area, are the provisions in this PLA generally the same as the others?

A. While Project Labor Agreements often look similar to each other, and particular clauses are often used in multiple agreements, each PLA is a unique document and should be examined accordingly.

Q23. What happens if a dispute occurs between the contractor and an employee during the project?

A. The PLA contains a grievance and arbitration process to resolve disputes between the contractor and the employees. See PLA Article 9.

Q24. What happens if there is a dispute between locals as to which local gets to provide employees for a particular project or a particular aspect of a project?

A. The PLA provides for jurisdictional disputes to be resolved in accordance with the NY Plan. See PLA Article 10. A copy of the NY Plan is available upon request from the Department. The PLA provides that work is not to be disrupted or interrupted pending the resolution of any jurisdictional dispute. The work proceeds as assigned by the contractor until the dispute is resolved. See PLA Article 10, Section 3.

**THIS PAGE INTENTIONALLY LEFT BLANK**

## CONTACT INFORMATION FOR LOCAL UNIONS

### BOILER MAKERS LOCAL NO. 5

24 Van Siclen Avenue  
Floral Park, NY 11001  
Phone: (516) 326-2500  
Fax: (516) 326-3435  
Thomas Klein, Bus. Mgr.  
[boilermakers5@optonline.net](mailto:boilermakers5@optonline.net)

### BLASTERS & DRILLERS LOCAL NO. 29

43-12 Ditmars Blvd.  
Astoria, NY, 11105  
Phone: (718) 278-5800  
Thomas Russo, bus mgr.

### BRICKLAYERS LOCAL NO. 1

Santo Lanzafame (718) 392-0525

### BUILDING TRADES

71 West 23<sup>rd</sup> Street, Suite 501  
New York, NY 10010  
Phone: (212) 647-0700  
Fax: (212) 647-0705  
John Barnett, Chairman

### CARPENTERS DISTRICT COUNCIL

395 Hudson Street  
New York, New York 10014  
Phone: (212) 366-7500  
Fax: (212) 675-3140  
Michael J. Forde, Executive Secy Treas.  
Peter Thomassen, President  
Denis Sheil, V.P.  
Ronald Rawald, D.C. Rep.  
[carpmik@aol.com](mailto:carpmik@aol.com)

### CEMENT MASONS NO. 780

150-42 12<sup>th</sup> Avenue  
Whitestone, NY 11357  
Phone: (718) 357-3750  
Fax: (718) 357-2057  
Angelo Scagnelli, Bus. Mgr.  
Paul M. Mantia, President  
[Angelolocal780@yahoo.com](mailto:Angelolocal780@yahoo.com)

### CONCRETE WORKERS DISTRICT COUNCIL NO. 16

29-18 35<sup>th</sup> Avenue  
Long Island City, NY 11106  
Phone: (718) 392-5077  
Fax: (718) 392-5087  
Alex Castaldi, Pres. Bus. Mgr.  
[Ccwdc16@yahoo.com](mailto:Ccwdc16@yahoo.com)

### DERRICKMEN AND RIGGERS CONCRETE WORKERS

25-19 43<sup>rd</sup> Avenue  
Long Island City, NY 11101  
Phone: (718) 361-6534

Fax: (718) 361-6584  
Joseph McDonald, Bus. Agent  
[joemac197@aol.com](mailto:joemac197@aol.com)

**DRYWALL TAPERS 1974**

265 West 14<sup>th</sup> Street  
New York, NY 10011

Phone: (212) 242-8500

Fax: (212) 242-2356

Joseph Giordano, Bus. Mgr.

Salvatore Marsala, Org.

Maurice Maynard, Org.

Ellior Santiago, Org.

Vincent Calderone, Org.

Ann Juliano Union Sec.

[Local1974@aol.com](mailto:Local1974@aol.com)

**ELECTRICAL LOCAL NO. 3**

158-11 Harry Van Arsdale, Jr. Avenue

Flushing, NY 113656

Phone: (718) 591-4000

Fax: (718) 380-8998

Christopher Erikson, Bus. Mgr.

John E. Marchell, President

Raymond Melville, Asst. Bus. Mgr. Construction

Paul Ryan, Asst. Bus. Mgr. Westchester/Fairfield

Luis Restrepo, Asst. Bus. Mgr.

Mark G. Hansen, Bus. Rep.

Elliot Hecht, Bus. Rep.

Raymond Kitson, Bus. Rep.

Austin McCann, Bus. Rep.

Robert Olenick, Bus. Rep.

Michael O'Neill, Bus. Rep.

Joseph Santigate, Bus. Rep.

Louis Sciara, Bus. Rep.

Lance Van Arsdale, Asst. Bus. Maintenance Division

Ray West, Bus. Rep.

[mail@local3ibew.org](mailto:mail@local3ibew.org)

**ELEVATOR CONSTRUCTORS NO. 1**

47-24 27<sup>th</sup> Avenue

Long Island City, NY 11101

Phone: (718) 767-7004

Fax: (718) 767-6730

Lenny Legotte, Pres. Bus. Mgr.

Thomas Moore, Bus. Agent

Gary Riefenhauser, Bus. Agent

Fred McCourt, Bus. Agent

Robert Stork, Bus. Agent

[llegotte@localoneiuec.com](mailto:llegotte@localoneiuec.com)

[snoble@localoneiuec.com](mailto:snoble@localoneiuec.com)

**ENGINEERS NO. ENGINEERS LOCAL UNION NO. 14**

141-57 Northern Boulevard

Flushing, NY 11354

Phone: (718) 939-0600

Fax: (718) 939-3131

Edwin Christian, Pres. Bus. Mgr.

Christopher Confrey, Bus. Rep. Rec Sec.  
John R. Powers, Bus. Rep. Treas.  
[engineers@iuoelocal14.com](mailto:engineers@iuoelocal14.com)

**ENGINEERS NO. 15, 15A, 15B, 15C, 15D**

265 West 14<sup>th</sup> Street  
New York, NY 10011  
Phone: (212) 929-5327-8-9  
Fax: (212) 206-0357  
James T. Callahan, Pres. & Bus. Mgr.  
Robert G. Shaw, Bus. Rep. & V.P.  
Charles Gambino, Bus. Rep., Fin. Sec.  
Brian S. Kelly, Bus. Rep. & Rec. Sec.  
Daniel Schneider, Bus. Rep. & Treasurer  
Gregg Nolan, Bus. Rep.  
Christopher Thomas, Bus. Rep.  
Bruce Murphy, Director of Training

**ENGINEERS NO. 30**

115-06 Myrtle Avenue  
Richmond Hill, NY 11418  
Phone: (718) 847-8484  
Fax: (718) 850-0524  
John T. Ahern, Bus. Mgr.

**ENGINEERS No. 94**

331-337 West 44<sup>th</sup> Street  
New York, NY 10036  
Phone: (212) 245-7040 Fax: (212) 245-7886  
Kuba Brown, Bus. Mgr. & President  
[kubabrown@local94.com](mailto:kubabrown@local94.com)

**GLAZERS NO. 1281**

45 West 14<sup>th</sup> Street  
New York, NY 10011  
Phone: (212) 924-5200  
Fax: (212) 255-1151  
William Efeld, Bus. Rep.

**HEAT & FROST INSULATORS AND ASBESTOS WORKERS LOCAL UNION NO. 12**

25-19 43<sup>rd</sup> Avenue  
Long Island City, NY 11101  
Phone: (718) 784-3456  
Fax: (718) 784-8357  
Joseph Lapinski, Bus. Agent  
Nick Grgas, Bus. Agent  
Matthew Aracick, Fin. Sec.  
John Killard, President  
Dennis Ippolito, Bus. Mgr.  
[matty@insulatorslocal12.com](mailto:matty@insulatorslocal12.com)  
[dennis@insulators.org](mailto:dennis@insulators.org)

**HEAT FROST INSULATORS LOCAL UNION NO. 12A**

2110 Newton Avenue  
Astoria, NY 11102  
Phone: (718) 937-3203  
Fax: (718) 482-8722  
Francisco Vega, Bus. Mgr.

**IRON WORKERS DISTRICT**

505 White Plains Road, Suite 200  
Tarrytown, NY 10591  
Phone: (914) 332-4430  
Fax: (914) 332-4431  
Edward J. Walsh, Pres.  
[ironworkdc@aol.com](mailto:ironworkdc@aol.com)

**IRON WORKERS NO. 40**

451 Park Avenue South  
New York, NY 10016  
Phone: (212) 889-1320  
Fax: (212) 779-3267  
Robert Walsh, Bus. Mgr. Fin. Sec.  
Daniel Doyle, Bus. Rep. V.P.  
Kevin O'Rourke, Pres. Bus. Agent

**IRON WORKERS NO. 361**

89-19 97<sup>th</sup> Avenue  
Ozone Park, NY 11416  
Phone: (718) 332-1016-17  
Fax: (718) 322-1053  
Matthew Chartrand, Pres. Bus. Agent  
Richard O'Kane, Bus. Mgr. Fin. Sec.  
Thomas Seaman, President  
Anthony DeBlaisie, Bus. Agent, V.P.  
John Delaney, Jr., Rec. Sec.  
[unionhall@361.com](mailto:unionhall@361.com)

**LABORERS LOCAL NO. 78 ASBESTOS & LEAD ABATEMENT**

30 Cliff Street  
New York, New York 10038-2825  
Phone: (212) 227-4805  
Fax: (212) 406-1800  
Kazik Prosniewski, Pres.  
Edison Severino, Bus. Mgr.  
Pawel Gruchacz, Sec. Treas.  
[Local78dispatchers@gmail.com](mailto:Local78dispatchers@gmail.com)

**LABORERS, CONSTRUCTION AND GENERAL BUILDING NO. 79**

520 8<sup>th</sup> Avenue  
New York, NY 10018  
Phone: (212) 465-7900  
Fax: (212) 465-7903  
Kenneth Brancaccio, President  
John Delgado, Bus. Mgr.  
George Zecca, Bus. Mgr.  
John Norbury, V.P. & Bus. Agent  
Chas Rynkiewicz, Organizer, Mk Dev.  
Eugene Sparano, Organizer Mkt. Dev.  
John Modica, Bus. Agent  
Joseph Cangelosi, Bus. Agent  
Kenny Robinson, Bus. Agent  
James Haggerty, Bus. Agent  
Carl Tully, Bus. Agent  
Jose Andino, Bus. Agent  
Edward Medina, Bus. Agent

Luis Pereria, Bus Agent  
Noe Duran, Bus. Agent  
Timothy Campbell, Bus. Agent  
John Wund, Agent, Organizer  
79@laborerslocal.org

**LABORERS NO. 731**

34-11/19 35<sup>th</sup> Avenue  
Astoria, NY 11106  
(718) 706-0720  
Joseph D'Amato, Bus. Mgr.

**LATHERS METAL LOCAL NO. 46**

1322 Third Avenue  
New York, NY 10021  
Phone: (212) 737-0500  
Fax: (212) 249-1226  
Robert Ledwith, Bus. Mgr.  
Terence Moore, Bus. Agent  
Kenneth Allen, Bus. Agent  
Fred LeMoine Jr., Bus. Agent  
Kevin Kelly, Bus. Agent

**MASON TENDERS DIST. COUNCIL**

520 8<sup>th</sup> Avenue  
New York, NY 10018  
Phone: (212) 452-9400  
Fax: (212) 452-9499  
Robert Bonanza, Bus. Mgr.  
David Bolger, Field Rep.

**METAL POLISHERS LOCAL UNION NO. 8A**

36-18 33<sup>rd</sup> Street 2<sup>nd</sup> Fl.  
Long Island City, 11106  
Phone: (718) 361-1770  
Fax: (718) 361-1934  
Hector Lopez, Bus. Mgr., Pres.

**METAL TRADES DIVISION**

Kevin Connelly, Bus. Agent  
21-42 44<sup>th</sup> Drive

**MILLWRIGHT AND MACHINERY ERECTORS LOCAL NO. 740**

89-07 Atlantic Avenue  
Woodhaven, NY 11412  
Phone: (718) 849-3636  
Fax: (718) 849-0070  
Robert Seeger, Bus. Mgr.

**ORNAMENTAL IRON WORKERS NO. 580**

501 West 42<sup>nd</sup> Street  
New York, NY 10036  
Phone: (212) 594-1662  
Fax: (212) 564-2748  
Dennis Lusardi, Bus. Mgr.  
James Mahoney, Bus. Agent  
Robert Benesh, Bus. Agent  
Dennis Milton, Bus. Agent

Peter Creegan, Bus. Agent  
[dlusardi@local-580.com](mailto:dlusardi@local-580.com)

**PAINTERS DISTRICT COUNCIL NO. 9**

45 West 14<sup>th</sup> Street  
New York, NY 10011  
Phone: (212) 255-2950  
Fax: (212) 255-1151

William Elfeld, President  
Gerard O'Brien, Bus. Rep.  
Greg Coords, Bus. Rep.  
Richard Small, Bus. Rep.  
Jose Toront, Bus. Rep.  
Raul Rendon, Bus. Rep.  
Paul Belliveau, Bus. Rep.  
Joseph Ramaglia, Bus. Mgr.  
Anthony Buscema, Bus. Rep.  
James Barnett, Bus. Rep.  
Angelo Serse, Bus. Rep.  
Jack Kittle, Political Dir.  
Gus Diamantas, Training Director  
John Barrett, Bus. Rep.

**PAINTERS STRUCTURAL STEEL NO. 806**

40 West 27<sup>th</sup> Street  
New York, New York 10001  
Phone: (212) 447-1838, 0149  
Fax: (212) 545-8386  
Angelo Serse, Bus. Mgr.

**PAVERS & ROAD BUILDERS DISTRICT COUNCIL NO. 1**

136-25 37<sup>th</sup> Avenue, Suite 502  
Flushing, NY 11354  
Phone: (718) 779-8850  
Fax: (718) 779-8857  
Keith Loscalzo, Bus. Mgr.  
Vincent Masino, Trustee  
Lowell Barton, Bus. Agent  
Francisco Fernandez, Bus. Agent  
Joao Teixeira, Bus. Agent  
Bonaventura Valerio, Bus. Agent  
Joseph Sarro, Bus. Agent

**PLASTERS LOCAL UNION NO. 262**

2241 Conner Street  
Bronx, NY 10466  
Phone: (718) 547-5440  
Fax: (718) 547-5435  
John Sweeney, Int'l Rep.  
[mventura@opcmialocal262.com](mailto:mventura@opcmialocal262.com)

**PLUMBERS NO. 1**

158-29 Bross Bay Boulevard  
Howard Beach, NY 11414  
Phone: (718) 738-7500  
Fax: (718) 835-0896  
George Reilly, Bus. Mgr.  
Daniel Lucarelli, Bus. Agent  
PLA-Union Contact List\_rev



Kevin Brady Sr., Bus. Agent  
Donald Doherty Jr. Bus. Agent at Large  
Dudley Kinsley, Bus. Agent  
Michael Apuzzo, Bus. Agent  
John Feeney Jr., Bus. Agent  
Paul O'conner, Bus. Agent  
Anthony Russini, Bus. Agent  
John Murphy, Fin. Sec. Treasuer  
Fred Delligatti, Bus. Agent  
Thomas Kemps, Bus. Agent  
[plu1ny@aol.com](mailto:plu1ny@aol.com)

**PRIVATE SANITATION LOCAL NO. 813**

45-18 Court Sq., Suite 600  
Long Island City, NY 11101  
Phone: (718) 937-7010  
Fax: (718) 937-7003  
Anthony Marino, President

**ROOFERS & WATERPROOFERS NO. 8**

467 Dean Street  
Brooklyn, NY 11217  
Phone: (718) 857-3500  
Fax (718) 398-8359  
Thomas Pedrick, Trustee & Int'l V.P.  
Nicolas Siciliano, Bus. Agent

**SHEET METAL WORKERS LOCAL NO. 28**

MANHATTAN OFFICE  
500 Greenwich Street  
New York, NY 10013  
Phone: (212) 226-941-7700  
Fax: (212) 226-0304  
Brian McBreaty, Bus. Agent  
Richard Knice, Fin. Sec-Treas.  
Michael Belluzzi, Bus. Mgr. & Pres.  
Kevin McPike, Bus. Agent  
Daniel Fox Jr., Bus. Agent  
Rick Buckheit, Bus. Agent  
Robert Rotolo, Bus. Mgr.  
[joanne@local28union.com](mailto:joanne@local28union.com)

**SHEET METAL WORKERS LOCAL 137**

21-42 44<sup>th</sup> Drive  
Long Island City, NY 11101  
Phone: (718) 937-4514  
Fax: (718) 937-4113  
Paul Collins Jr.  
Dante Dano, Agent

**STEAMFITTERS LOCAL UNION NO. 638**

32-32 48<sup>th</sup> Avenue  
Long Island City, NY 11101  
Phone: (718) 392-3420  
Fax: (718) 784-7285  
John Torpey, Pres.-Fax: (718) 372-5340  
James Elder, Sec. Treasurer  
John Enright, Bus. Agent

John O'Connell, Bus. Agent  
Richard Roberts, Bus. Agent At-Large  
Patrick Dolan Jr., Bus. Agent  
Brian Wangerman, Bus. Agent  
Robert Egan Jr., Bus. Agent  
Vincent Curran Jr., Bus. Agent  
Patrick Daly, Bus. Agent  
Raymond Dean Jr., Bus. Agent  
Scott Roche, Bus. Agent  
Patrick Norton, Bus. Agent  
Robert Bartels, Jr. Bus. Agent  
Christopher P. Sheeran, Bus. Agent  
bpetriccione@steamfitters638.org  
rroberts@steamfitters638.org

**TEAMSTERS LOCAL UNION 282**

2500 Marcus Avenue  
Lake Success, NY 11042  
Phone: (516) 488-2822  
Fax: (516) 488-4895  
Thomas Gesualdi  
Kpalmeri282@yahoo.com

**TEAMSTERS LOCAL UNION 814**

33-01 38<sup>th</sup> Avenue  
Long Island City, NY 11101  
Phone: (718) 392-4510  
Fax: (718) 361-9610  
George Daniello, Pres., Bus. Mgr.  
team814@hotmail.com

**TILE, MARBLE & TERRAZO B.A.C. LOCAL UNION 7**

45-34 Court Square  
Long Island City, NY 11101  
Phone: (718) 786-7648  
Fax: (718) 472-2370  
Thomas Lane, President Bus. Mgr.  
William Hill, Bus. Agent  
Blaise Toneatto, Bus. Agent  
Christopher Guy, Sec. Treasuer  
Ernesto Jimenez, Bus. Agent  
Joseph Andriano, Bus. Agent  
Ronald Nicastri, Bus. Agent  
James Ghan, Bus. Agent  
tlane@baclocal7.com

**TIMBERMEN LOCAL 1536**

395 Hudson Street, 8<sup>th</sup> Floor  
New York, NY 10014  
Phone: (212) 366-7500  
Samuel Bailey, Bus. Mgr.

NYC AGENCY RENOVATION & REHAB OF CITY OWNED BUILDINGS/STRUCTURES

**PROJECT LABOR AGREEMENT**

**COVERING SPECIFIED**

**RENOVATION & REHABILITATION  
OF CITY OWNED BUILDINGS AND STRUCTURES**

TABLE OF CONTENTS

	PAGE
<b>ARTICLE 1 - PREAMBLE.....</b>	<b>1</b>
SECTION 1. PARTIES TO THE AGREEMENT .....	2
<b>ARTICLE 2 - GENERAL CONDITIONS .....</b>	<b>2</b>
SECTION 1. DEFINITIONS.....	2
SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE.....	3
SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT .....	3
SECTION 4. SUPREMACY CLAUSE .....	4
SECTION 5. LIABILITY .....	4
SECTION 6. THE AGENCY.....	5
SECTION 7. AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS .....	5
SECTION 8. SUBCONTRACTING .....	5
<b>ARTICLE 3-SCOPE OF THE AGREEMENT.....</b>	<b>5</b>
SECTION 1. WORK COVERED.....	5
SECTION 2. TIME LIMITATIONS.....	7
SECTION 3. EXCLUDED EMPLOYEES .....	7
SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES.....	9
<b>ARTICLE 4- UNION RECOGNITION AND EMPLOYMENT .....</b>	<b>9</b>
SECTION 1. PRE-HIRE RECOGNITION.....	9

SECTION 2. UNION REFERRAL .....	9
SECTION 3. NON-DISCRIMINATION IN REFERRALS .....	11
SECTION 4. MINORITY AND FEMALE REFERRALS .....	12
SECTION 5. CROSS AND QUALIFIED REFERRALS.....	12
SECTION 6. UNION DUES .....	12
SECTION 7. CRAFT FOREPERSONS AND GENERAL FOREPERSONS .....	13
<b>ARTICLE 5- UNION REPRESENTATION .....</b>	<b>13</b>
SECTION 1. LOCAL UNION REPRESENTATIVE .....	13
SECTION 2. STEWARDS.....	13
SECTION 3. LAYOFF OF A STEWARD.....	14
<b>ARTICLE 6- MANAGEMENT'S RIGHTS .....</b>	<b>14</b>
SECTION 1. RESERVATION OF RIGHTS.....	14
SECTION 2. MATERIALS, METHODS & EQUIPMENT.....	15
<b>ARTICLE 7- WORK STOPPAGES AND LOCKOUTS.....</b>	<b>16</b>
SECTION 1. NO STRIKES-NO LOCK OUT .....	16
SECTION 2. DISCHARGE FOR VIOLATION.....	16
SECTION 3. NOTIFICATION.....	16
SECTION 4. EXPEDITED ARBITRATION.....	17
SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION .....	19
<b>ARTICLE 8 - LABOR MANAGEMENT COMMITTEE .....</b>	<b>19</b>
SECTION 1. SUBJECTS.....	19

SECTION 2. COMPOSITION ..... 19

**ARTICLE 9- GRIEVANCE & ARBITRATION PROCEDURE ..... 19**

SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES ..... 20

SECTION 2. LIMITATION AS TO RETROACTIVITY..... 22

SECTION 3. PARTICIPATION BY AGENCY AND/OR CONSTRUCTION  
MANAGER..... 22

**ARTICLE 10 - JURISDICTIONAL DISPUTES..... 22**

SECTION 1. NO DISRUPTIONS ..... 22

SECTION 2. ASSIGNMENT ..... 22

SECTION 3. NO INTERFERENCE WITH WORK..... 22

**ARTICLE 11 - WAGES AND BENEFITS..... 23**

SECTION 1. CLASSIFICATION AND BASE HOURLY RATE ..... 23

SECTION 2. EMPLOYEE BENEFITS..... 23

**ARTICLE 12- HOURS OF WORK, PREMIUM PAYMENTS, SHIFTS AND  
HOLIDAYS..... 26**

SECTION 1. WORK WEEK AND WORK DAY ..... 26

SECTION 2. OVERTIME ..... 27

SECTION 3. SHIFTS ..... 27

SECTION 4. HOLIDAYS ..... 28

SECTION 5. SATURDAY MAKE-UP DAYS..... 28

SECTION 6. REPORTING PAY ..... 29

SECTION 7. PAYMENT OF WAGES ..... 30

SECTION 8. EMERGENCY WORK SUSPENSION ..... 30

SECTION 9. INJURY/DISABILITY ..... 30

SECTION 10. TIME KEEPING ..... 30

SECTION 11. MEAL PERIOD ..... 30

SECTION 12. BREAK PERIODS ..... 31

**ARTICLE 13 - APPRENTICES ..... 31**

SECTION 1. RATIOS ..... 31

**ARTICLE 14-SAFETY PROTECTION OF PERSON AND PROPERTY ..... 31**

SECTION 1. SAFETY REQUIREMENTS ..... 31

SECTION 2. CONTRACTOR RULES ..... 32

SECTION 3. INSPECTIONS ..... 32

**ARTICLE 15 - TEMPORARY SERVICES ..... 32**

**ARTICLE 16 - NO DISCRIMINATION ..... 33**

SECTION 1. COOPERATIVE EFFORTS ..... 33

SECTION 2. LANGUAGE OF AGREEMENT ..... 33

**ARTICLE 17- GENERAL TERMS ..... 33**

SECTION 1. PROJECT RULES ..... 33

SECTION 2. TOOLS OF THE TRADE ..... 34

SECTION 3. SUPERVISION ..... 34

SECTION 4. TRAVEL ALLOWANCES ..... 34

SECTION 5. FULL WORK DAY ..... 34

SECTION 6. COOPERATION AND WAIVER ..... 34

**ARTICLE 18. SAVINGS AND SEPARABILITY ..... 35**

SECTION 1. THIS AGREEMENT ..... 35

SECTION 2. THE BID SPECIFICATIONS ..... 36

SECTION 3. NON-LIABILITY ..... 36

SECTION 4. NON-WAIVER..... 36

**ARTICLE 19 - FUTURE CHANGES IN SCHEDULE A AREA CONTRACTS ... 37**

SECTION 1. CHANGES TO AREA CONTRACTS ..... 37

SECTION 2. LABOR DISPUTES DURING AREA CONTRACT NEGOTIATIONS  
..... 37

**ARTICLE 20 - WORKERS' COMPENSATION ADR ..... 37**

SECTION 1..... 37

**ARTICLE 21 - HELMETS TO HARDHATS ..... 38**

Section 1..... 38

Section 2..... 38

Project Labor Agreement - - Letter of Assent.....45

New York City Building and Construction Trades Council Standards of  
Excellence.....46



**PROJECT LABOR AGREEMENT COVERING SPECIFIED  
RENOVATION & REHABILITATION OF NEW YORK CITY OWNED  
FACILITIES & STRUCTURES**

**ARTICLE 1 - PREAMBLE**

WHEREAS, the City of New York desires to provide for the cost efficient, safe, quality, and timely completion of certain rehabilitation and renovation work ("Program Work," as defined in Article 3) for Fiscal Years 2010 - 2014 in a manner designed to afford the lowest costs to the Agencies covered by this Agreement, and the Public it represents, and the advancement of permissible statutory objectives;

WHEREAS, this Project Labor Agreement will foster the achievement of these goals, inter alia, by:

(1) providing a mechanism for responding to the unique construction needs associated with this Program Work and achieving the most cost effective means of construction, including direct labor cost savings, by the Building and Construction Trades Council of Greater New York and Vicinity and the signatory Local Unions and their members waiving various shift and other hourly premiums and other work and pay practices which would otherwise apply to Program Work;

(2) expediting the construction process and otherwise minimizing the disruption to the covered Agencies' ongoing operations at the facilities that are the subject of the Agreement;

(3) avoiding the costly delays of potential strikes, slowdowns, walkouts, picketing and other disruptions arising from work disputes, reducing jobsite friction on common situs worksites, and promoting labor harmony and peace for the duration of the Program Work;

(4) standardizing the terms and conditions governing the employment of labor on the Program Work;

(5) permitting wide flexibility in work scheduling and shift hours and times to allow maximum work to be done during off hours yet at affordable pay rates;

(6) permitting adjustments to work rules and staffing requirements from those which otherwise might obtain;

(7) providing comprehensive and standardized mechanisms for the settlement of work disputes, including those relating to jurisdiction;

- (8) ensuring a reliable source of skilled and experienced labor; and
- (9) securing applicable New York State Labor Law exemptions.

WHEREAS, the Building and Construction Trades Council of Greater New York and Vicinity, its participating affiliated Local Unions and their members, desire to assist the City in meeting these operational needs and objectives as well as to provide for stability, security and work opportunities which are afforded by this Project Labor Agreement; and

WHEREAS, the Parties desire to maximize Program Work safety conditions for both workers and the community in the project area.

NOW, THEREFORE, the Parties enter into this Agreement:

#### **SECTION 1. PARTIES TO THE AGREEMENT**

This is a Project Labor Agreement ("Agreement") entered into by the City of New York, on behalf of itself and the Agencies covered herein, including in their capacity as construction manager of covered projects and/or on behalf of any third party construction manager which may be utilized, and the Building and Construction Trades Council of Greater New York and Vicinity ("Council") (on behalf of itself) and the signatory affiliated Local Union's ("Unions" or "Local Unions"). The Council and each signatory Local Union hereby warrants and represents that it has been duly authorized to enter into this Agreement.

#### **ARTICLE 2 - GENERAL CONDITIONS**

##### **SECTION 1. DEFINITIONS**

Throughout this Agreement, the various Union parties including the Building and Construction Trades Council of Greater New York and Vicinity and its participating affiliated Local Unions, are referred to singularly and collectively as "Union(s)" or "Local Unions"; the term "Contractor(s)" shall include any Construction Manager, General Contractor and all other

contractors, and subcontractors of all tiers engaged in Program Work within the scope of this Agreement as defined in Article 3; "Agency" means the following New York City agencies: the Department for the Aging (DFTA), Administration for Children's Services (ACS), Department of Citywide Administrative Services (DCAS), Department of Corrections (DOC), Department of Design and Construction (DDC), Fire Department (FDNY), Department of Homeless Services (DHS), Human Resources Administration (HRA), Department of Health and Mental Hygiene (DOHMH), Department of Parks and Recreation (DPR), Police Department (NYPD); Department of Sanitation (DSNY); the New York City Agency that awards a particular contract subject to this Agreement may be referred to hereafter as the "Agency"; when an Agency acts as Construction Manager, unless otherwise provided, it has the rights and obligations of a "Construction Manager" in addition to the rights and obligations of an Agency; the Building and Construction Trades Council of Greater New York and Vicinity is referred to as the "Council"; and the work covered by this Agreement (as defined in Article 3) is referred to as "Program Work."

## **SECTION 2. CONDITIONS FOR AGREEMENT TO BECOME EFFECTIVE**

This Agreement shall not become effective unless each of the following conditions are met: the Agreement is executed by (1) the Council, on behalf of itself, (2) the participating affiliated Local Unions; and (3) the mayor of the City of New York or his designee.

## **SECTION 3. ENTITIES BOUND & ADMINISTRATION OF AGREEMENT**

This Agreement shall be binding on all participating Unions and their affiliates, the Construction Manager (in its capacity as such) and all Contractors of all tiers performing Program Work, as defined in Article 3. The Contractors shall include in any subcontract that they let for performance during the term of this Agreement a requirement that their subcontractors, of all tiers, become signatory and bound by this Agreement with respect to that subcontracted work

falling within the scope of Article 3 and all Contractors (including subcontractors) performing Program Work shall be required to sign a "Letter of Assent" in the form annexed hereto as Exhibit "A". This Agreement shall be administered by the applicable Agency or a Construction Manager or such other designee as may be named by the Agency or Construction Manager, on behalf of all Contractors.

#### SECTION 4. SUPREMACY CLAUSE

This Agreement, together with the local Collective Bargaining Agreements appended hereto as Schedule A, represents the complete understanding of all signatories and supersedes any national agreement, local agreement or other collective bargaining agreement of any type which would otherwise apply to this Program Work, in whole or in part, except that Program Work which falls within the jurisdiction of the Operating Engineers Locals 14 and 15 and/or the Teamsters Local 282 will be performed under the terms and conditions set out in the Schedule A agreements of Operating Engineers Locals 14 and 15 and Teamsters Local 282. Subject to the foregoing, where a subject covered by the provisions of this Agreement is also covered by a Schedule A, the provisions of this Agreement shall prevail. It is further understood that no Contractor shall be required to sign any other agreement as a condition of performing Program Work. No practice, understanding or agreement between a Contractor and a Local Union which is not set forth in this Agreement shall be binding on this Program Work unless endorsed in writing by the Construction Manager or such other designee as may be designated by the Agency.

#### SECTION 5. LIABILITY

The liability of any Contractor and the liability of any Union under this Agreement shall be several and not joint. The Construction Manager and any Contractor shall not be liable for any violations of this Agreement by any other Contractor; and the Council and

Local Unions shall not be liable for any violations of this Agreement by any other Union.

#### **SECTION 6. THE AGENCY**

The Agency (or Construction Manager where applicable) shall require in its bid specifications for all Program Work within the scope of Article 3 that all successful bidders, and their subcontractors of all tiers, become bound by, and signatory to, this Agreement. The Agency (or Construction Manager) shall not be liable for any violation of this Agreement by any Contractor. It is understood that nothing in this Agreement shall be construed as limiting the sole discretion of the Agency or Construction Manager in determining which Contractors shall be awarded contracts for Program Work. It is further understood that the Agency or Construction Manager has sole discretion at any time to terminate, delay or suspend the Program Work, in whole or part, on any Program.

#### **SECTION 7. AVAILABILITY AND APPLICABILITY TO ALL SUCCESSFUL BIDDERS**

The Unions agree that this Agreement will be made available to, and will fully apply to, any successful bidder for (or subcontractor of) Program Work who becomes signatory thereto, without regard to whether that successful bidder (or subcontractor) performs work at other sites on either a union or non-union basis and without regard to whether employees of such successful bidder (or subcontractor) are, or are not, members of any unions. This Agreement shall not apply to the work of any Contractor which is performed at any location other than the site of Program Work.

#### **SECTION 8. SUBCONTRACTING**

Contractors will subcontract Program Work only to a person, firm or corporation who is or agrees to become party to this Agreement.

#### **ARTICLE 3-SCOPE OF THE AGREEMENT**

#### **SECTION 1. WORK COVERED**

Program Work shall be limited to designated rehabilitation and renovation construction contracts bid and let by an Agency (or its Construction Manager where applicable) after the effective date of this Agreement with respect to rehabilitation and renovation work performed for an Agency on City-owned property under contracts let prior to June 30, 2014. Subject to the foregoing, and the exclusions below, such Program Work shall mean any and all contracts that predominantly involve the renovation, repair, alteration, rehabilitation or expansion of an existing City-owned building or structure within the five boroughs of New York City. Examples of Program Work include, but are not limited to, the renovation, repair, alteration and rehabilitation of an existing temporary or permanent structure, or an expansion of above ground structures located in the City on a City-owned building. This Program Work shall also include JOCS contracts, demolition work, site work, asbestos and lead abatement, painting services, carpentry services, and carpet removal and installation, to the extent incidental to such building rehabilitation of City-owned buildings or structures.

It is understood that Program Work does not include, and this Project Labor Agreement shall not apply to, any other work, including:

1. Contracts let and work performed in connection with projects carried over, recycled from, or performed under bids or rebids relating to work that were bid prior to the effective date of this Agreement or after June 30, 2014;
2. Contracts procured on an emergency basis;
3. Small purchases (purchases not more than \$100,000) awarded pursuant to New York City Charter §314, New York City Charter § 316 and New York City Procurement Policy Board Rules §3-08;
4. Contracts for work on streets and bridges and for the closing or environmental remediation of landfills;

5. Contracts with not-for-profit corporations where the City is not awarding or performing the work performed for that entity;

6. Contracts with governmental entities where the City is not awarding or performing the work performed for that entity;

7. Contracts with electric utilities, gas utilities, telephone companies, and railroads, except that it is understood and agreed that these entities may only install their work to a demarcation point, e.g. a telephone closet or utility vault, the location of which is determined prior to construction and employees of such entities shall not be used to replace employees performing Program Work pursuant to this agreement; and

8. Contracts for installation of information technology that are not otherwise Program Work.

## **SECTION 2. TIME LIMITATIONS**

In addition to falling within the scope of Article 3, Section 1, to be covered by this Agreement Program Work must be (1) advertised and let for bid after the effective date of this Agreement, and (2) let for bid prior to June 30, 2014, the expiration date of this Agreement. It is understood that this Agreement, together with all of its provisions, shall remain in effect for all such Program Work until completion, even if not completed by the expiration date of the Agreement. If Program Work otherwise falling within the scope of Article 3, Section 1 is not let for bid by the expiration date of this Agreement, this Agreement may be extended to that work by mutual agreement of the parties.

## **SECTION 3. EXCLUDED EMPLOYEES**

The following persons are not subject to the provisions of this Agreement, even though performing Program Work:

A. Superintendents, supervisors (excluding general and forepersons

specifically covered by a craft's Schedule A), engineers, professional engineers and/or licensed architects engaged in inspection and testing, quality control/assurance personnel, timekeepers, mail carriers, clerks, office workers, messengers, guards, technicians, non-manual employees, and all professional, engineering, administrative and management persons;

B. Employees of the Agency, New York City, or any other municipal or State agency, authority or entity, or employees of any other public employer, even though working on the Program site while covered Program Work is underway;

C. Employees and entities engaged in off-site manufacture, modifications, repair, maintenance, assembly, painting, handling or fabrication of project components, materials, equipment or machinery or involved in deliveries to and from the Program site, except to the extent they are lawfully included in the bargaining unit of a Schedule A agreement;

D. Employees of the Construction Manager (except that in the event the Agency engages a Contractor to serve as Construction Manager, then those employees of the Construction Manager performing manual, on site construction labor will be covered by this Agreement);

E. Employees engaged in on-site equipment warranty work unless employees are already working on the site and are certified to perform warranty work;

F. Employees engaged in geophysical testing other than boring for core samples;

G. Employees engaged in laboratory, specialty testing, or inspections, pursuant to a professional services agreement between the Agency, or any of the Agency's other professional consultants, and such laboratory, testing, inspection or surveying firm; and

H. Employees engaged in on-site maintenance of installed equipment or systems which maintenance is awarded as part of a contract that includes Program Work but



which maintenance occurs after installation of such equipment or system and is not directly related to construction services.

#### **SECTION 4. NON-APPLICATION TO CERTAIN ENTITIES**

This Agreement shall not apply to those parents, affiliates, subsidiaries, or other joint or sole ventures of any Contractor which do not perform Program Work. It is agreed that this Agreement does not have the effect of creating any joint employment, single employer or alter ego status among the Agency (including in its capacity as Construction Manager) or any Contractor. The Agreement shall further not apply to any New York City or other municipal or State agency, authority, or entity other than a listed Agency and nothing contained herein shall be construed to prohibit or restrict the Agency or its employees, or any State, New York City or other municipal or State authority, agency or entity and its employees, from performing on or off-site work related to Program Work.

As the contracts involving Program Work are completed and accepted, the Agreement shall not have further force or effect on such items or areas except where inspections, additions, repairs, modifications, check-out and/or warranty work are assigned in writing (copy to Local Union involved) by the Agency (or Construction Manager) for performance under the terms of this Agreement.

### **ARTICLE 4- UNION RECOGNITION AND EMPLOYMENT**

#### **SECTION 1. PRE-HIRE RECOGNITION**

The Contractors recognize the signatory Unions as the sole and exclusive bargaining representatives of all employees who are performing on-site Program Work, with respect to that work.

#### **SECTION 2. UNION REFERRAL**

A. The Contractors agree to employ and hire craft employees for Program Work covered by this Agreement through the job referral systems and hiring halls established in the Local Unions area collective bargaining agreements. Notwithstanding this, Contractors shall have sole right to determine the competency of all referrals; to determine the number of employees required; to select employees for layoff (subject to Article 5, Section 3); and the sole right to reject any applicant referred by a Local Union, subject to the show-up payments. In the event that a Local Union is unable to fill any request for qualified employees within a 48 hour period after such requisition is made by a Contractor (Saturdays, Sundays and holidays excepted), a Contractor may employ qualified applicants from any other available source. In the event that the Local Union does not have a job referral system, the Contractor shall give the Local Union first preference to refer applicants, subject to the other provisions of this Article. The Contractor shall notify the Local Union of craft employees hired for Program Work within its jurisdiction from any source other than referral by the Union.

B. A Contractor may request by name, and the Local will honor, referral of persons who have applied to the Local for Program Work and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 180 calendar days prior to the contract award.

No more than twelve per centum (12%) of the employees covered by this Agreement, per Contractor by craft, shall be hired through the special provisions above. Under this provision, name referrals begin with the eighth employee needed and continue on that same

basis.

C. Notwithstanding Section 2(B), above, certified MWBE contractors for which participation goals are set pursuant to New York City Administrative Code §6-129, that are not signatory to any Schedule A CBAs, with contracts valued at or under five hundred thousand (\$500,000), may request by name, and the Local will honor, referral of the second (2<sup>nd</sup>), fourth (4<sup>th</sup>), sixth (6<sup>th</sup>), and eighth (8<sup>th</sup>) employee, who have applied to the Local for Program Work and who meet the following qualifications:

- (1) possess any license required by New York State law for the Program Work to be performed;
- (2) have worked a total of at least 1000 hours in the Construction field during the prior 3 years; and
- (3) were on the Contractor's active payroll for at least 60 out of the 180 work days prior to the contract award.

For such contracts valued at above \$500,000 but less than \$1 million, the Local will honor referrals by name of the second (2<sup>nd</sup>), fifth (5<sup>th</sup>), and eighth (8<sup>th</sup>) employee subject to the foregoing requirements. In both cases, name referrals will thereafter be in accordance with Section 2(B), above.

D. Where a certified MWBE Contractor voluntarily enters into a Collective Bargaining Agreement ("CBA") with a BCTC Union, the employees of such Contractor at the time the CBA is executed shall be allowed to join the Union for the applicable trade subject to satisfying the Union's basic standards of proficiency for admission.

### SECTION 3. NON-DISCRIMINATION IN REFERRALS

The Council represents that each Local Union hiring hall and referral system will be operated in a non-discriminatory manner and in full compliance with all applicable federal, state and local laws and regulations which require equal employment opportunities. Referrals

shall not be affected in any way by the rules, regulations, bylaws, constitutional provisions or any other aspects or obligations of union membership, policies or requirements and shall be subject to such other conditions as are established in this Article. No employment applicant shall be discriminated against by any referral system or hiring hall because of the applicant's union membership, or lack thereof.

#### **SECTION 4: MINORITY AND FEMALE REFERRALS**

In the event a Local Union either fails, or is unable to refer qualified minority or female applicants in percentages equaling the workforce participation goals adopted by the City and set forth in the Agency's (or, if applicable, Construction Manager's) bid specifications, within 48 hours of the request for same, the Contractor may employ qualified minority or female applicants from any other available source.

#### **SECTION 5. CROSS AND QUALIFIED REFERRALS**

The Local Unions shall not knowingly refer to a Contractor an employee then employed by another Contractor working under this Agreement. The Local Unions will exert their utmost efforts to recruit sufficient numbers of skilled and qualified crafts employees to fulfill the requirements of the Contractor.

#### **SECTION 6. UNION DUES**

All employees covered by this Agreement shall be subject to the union security provisions contained in the applicable Schedule A local agreements, as amended from time to time, but only for the period of time during which they are performing on-site Program Work and only to the extent of tendering payment of the applicable union dues and assessments uniformly required for union membership in the Local Unions which represent the craft in which the employee is performing Program Work. No employee shall be discriminated against at any Program Work site because of the employee's union membership or lack thereof. In the case of

unaffiliated employees, the dues payment will be received by the Local Unions as an agency shop fee.

## **SECTION 7. CRAFT FOREPERSONS AND GENERAL FOREPERSONS**

The selection of craft forepersons and/or general forepersons and the number of forepersons required shall be solely the responsibility of the Contractor except where otherwise provided by specific provisions of an applicable Schedule A, and provided that all craft forepersons shall be experienced and qualified journeypersons in their trade as determined by the appropriate Local Union. All forepersons shall take orders exclusively from the designated Contractor representatives. Craft forepersons shall be designated as working forepersons at the request of the Contractor, except when an existing local Collective Bargaining Agreement prohibits a foreperson from working when the craft persons he is leading exceed a specified number.

## **ARTICLE 5- UNION REPRESENTATION**

### **SECTION 1. LOCAL UNION REPRESENTATIVE**

Each Local Union representing on-site employees shall be entitled to designate in writing (copy to Contractor involved and Construction Manager) one representative, and/or the Business Manager, who shall be afforded access to the Program Work site.

### **SECTION 2. STEWARDS**

A. Each Local Union shall have the right to designate a working journey person as a Steward and an alternate, and shall notify the Contractor and Construction Manager of the identity of the designated Steward (and alternate) prior to the assumption of such duties. Stewards shall not exercise supervisory functions and will receive the regular rate of pay for their craft classifications. All Stewards shall be working Stewards.

B. In addition to their work as an employee, the Steward shall have the right

to receive complaints or grievances and to discuss and assist in their adjustment with the Contractor's appropriate supervisor. Each Steward shall be concerned with the employees of the Steward's trade and, if applicable, subcontractors of their Contractor, but not with the employees of any other trade Contractor. No Contractor shall discriminate against the Steward in the proper performance of Union duties.

C. The Stewards shall not have the right to determine when overtime shall be worked, or who shall work overtime except pursuant to a Schedule A provision providing procedures for the equitable distribution of overtime.

### **SECTION 3. LAYOFF OF A STEWARD**

Contractors agree to notify the appropriate Union 24 hours prior to the layoff of a Steward, except in cases of discipline or discharge for just cause. If a Steward is protected against layoff by a Schedule A provision, such provision shall be recognized to the extent the Steward possesses the necessary qualifications to perform the work required. In any case in which a Steward is discharged or disciplined for just cause, the Local Union involved shall be notified immediately by the Contractor.

## **ARTICLE 6- MANAGEMENT'S RIGHTS**

### **SECTION 1. RESERVATION OF RIGHTS**

Except as expressly limited by a specific provision of this Agreement, Contractors retain full and exclusive authority for the management of their operations including, but not limited to, the right to: direct the work force, including determination as to the number of employees to be hired and the qualifications therefore; the promotion, transfer, layoff of its employees; require compliance with the directives of the Agency including standard restrictions related to security and access to the site that are equally applicable to Agency employees, guests,

or vendors; or the discipline or discharge for just cause of its employees; assign and schedule work; promulgate reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work; and, the requirement, timing and number of employees to be utilized for overtime work. No rules, customs, or practices which limit or restrict productivity or efficiency of the individual, as determined by the Contractor, Agency and/or Construction Manager and/or joint working efforts with other employees shall be permitted or observed.

## SECTION 2. MATERIALS, METHODS & EQUIPMENT

There shall be no limitation or restriction upon the Contractors' choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices. Contractors may, without restriction, install or use materials, supplies or equipment regardless of their source; provided, however, that where there is a Schedule "A" that includes a lawful union standards and practices clauses, then such clause as set forth in Schedule A Agreements will be complied with, unless there is a lawful Agency specification (or specification issued by a Construction Manager which would be lawful if issued by the Agency directly) that would specifically limit or restrict the Contractor's choice of materials, techniques, methods, technology or design, or, regardless of source or location, upon the use and installation of equipment, machinery, package units, pre-cast, pre-fabricated, pre-finished, or pre-assembled materials or products, tools, or other labor-saving devices, and which would prevent compliance with such Schedule A clause. The on-site installation or application of such items shall be performed by the craft having jurisdiction over such work; provided, however, it is recognized that other personnel having special qualifications may participate, in a supervisory capacity, in

the installation, check-off or testing of specialized or unusual equipment or facilities as designated by the Contractor. There shall be no restrictions as to work which is performed off-site for Program Work.

## **ARTICLE 7- WORK STOPPAGES AND LOCKOUTS**

### **SECTION 1. NO STRIKES-NO LOCK OUT**

There shall be no strikes, sympathy strikes, picketing, work stoppages, slowdowns, hand billing, demonstrations or other disruptive activity at the Program Work site for any reason by any Union or employee against any Contractor or employer. There shall be no other Union, or concerted or employee activity which disrupts or interferes with the operation of the Program Work or the objectives of the Agency at any Program Work site. In addition, failure of any Union or employee to cross any picket line established by any Union, signatory or non-signatory to this Agreement, or the picket or demonstration line of any other organization, at or in proximity to a Program Work site where the failure to cross disrupts or interferes with the operation of Program Work is a violation of this Article. Should any employees breach this provision, the Unions will use their best efforts to try to immediately end that breach and return all employees to work. There shall be no lockout at a Program Work site by any signatory Contractor, Agency or Construction Manager.

### **SECTION 2. DISCHARGE FOR VIOLATION**

A Contractor may discharge any employee violating Section 1, above, and any such employee will not be eligible thereafter for referral under this Agreement for a period of 100 days.

### **SECTION 3. NOTIFICATION**

If a Contractor contends that any Union has violated this Article, it will notify the



Local Union involved advising of such fact, with copies of the notification to the Council. The Local Union shall instruct and order, the Council shall request, and each shall otherwise use their best efforts to cause, the employees (and where necessary the Council shall use its best efforts to cause the Local Union), to immediately cease and desist from any violation of this Article. If the Council complies with these obligations it shall not be liable for the unauthorized acts of a Local Union or its members. Similarly, a Local Union and its members will not be liable for any unauthorized acts of the Council. Failure of a Contractor or the Construction Manager to give any notification set forth in this Article shall not excuse any violation of Section 1 of this Article.

#### SECTION 4. EXPEDITED ARBITRATION

Any Contractor or Union alleging a violation of Section 1 of this Article may utilize the expedited procedure set forth below (in lieu of, or in addition to, any actions at law or equity) that may be brought.

A. A party invoking this procedure shall notify J.J. Pierson or Richard Adelman; who shall alternate (beginning with Arbitrator J.J. Pierson) as Arbitrator under this expedited arbitration procedure. If the Arbitrator next on the list is not available to hear the matter within 24 hours of notice, the next Arbitrator on the list shall be called. Copies of such notification will be simultaneously sent to the alleged violator and Council.

B. The Arbitrator shall thereupon, after notice as to time and place to the Contractor, the Local Union involved, the Council and the Construction Manager, hold a hearing within 48 hours of receipt of the notice invoking the procedure if it is contended that the violation still exists. The hearing will not, however, be scheduled for less than 24 hours after the notice required by Section 3, above.

C. All notices pursuant to this Article may be provided by telephone, telegraph, hand delivery, or fax, confirmed by overnight delivery, to the Arbitrator, Contractor,

Construction Manager and Local Union involved. The hearing may be held on any day including Saturdays or Sundays. The hearing shall be completed in one session, which shall not exceed 8 hours duration (no more than 4 hours being allowed to either side to present their case, and conduct their cross examination) unless otherwise agreed. A failure of any Union or Contractor to attend the hearing shall not delay the hearing of evidence by those present or the issuance of an award by the Arbitrator.

D. The sole issue at the hearing shall be whether a violation of Section 1, above, occurred. If a violation is found to have occurred, the Arbitrator shall issue a Cease and Desist Award restraining such violation and serve copies on the Contractor and Union involved. The Arbitrator shall have no authority to consider any matter in justification, explanation or mitigation of such violation or to award damages (any damages issue is reserved solely for court proceedings, if any.) The Award shall be issued in writing within 3 hours after the close of the hearing, and may be issued without an Opinion. If any involved party desires an Opinion, one shall be issued within 15 calendar days, but its issuance shall not delay compliance with, or enforcement of, the Award.

E. The Agency and Construction Manager (or such other designee of the Agency) may participate in full in all proceedings under this Article.

F. An Award issued under this procedure may be enforced by any court of competent jurisdiction upon the filing of this Agreement together with the Award. Notice of the filing of such enforcement proceedings shall be given to the Union or Contractor involved, and the Construction Manager.

G. Any rights created by statute or law governing arbitration proceedings which are inconsistent with the procedure set forth in this Article, or which interfere with compliance thereto, are hereby waived by the Contractors and Unions to whom they accrue.

H. The fees and expenses of the Arbitrator shall be equally divided between the involved Contractor and Union.

#### **SECTION 5. ARBITRATION OF DISCHARGES FOR VIOLATION**

Procedures contained in Article 9 shall not be applicable to any alleged violation of this Article, with the single exception that an employee discharged for violation of Section 1, above, may have recourse to the procedures of Article 9 to determine only if the employee did, in fact, violate the provisions of Section 1 of this Article; but not for the purpose of modifying the discipline imposed where a violation is found to have occurred.

#### **ARTICLE 8 - LABOR MANAGEMENT COMMITTEE**

##### **SECTION 1. SUBJECTS**

The Program Labor Management Committee will meet on a regular basis to: 1) promote harmonious relations among the Contractors and Unions; 2) enhance safety awareness, cost effectiveness and productivity of construction operations; 3) protect the public interests; 4) discuss matters relating to staffing and scheduling with safety and productivity as considerations; and 5) review efforts to meet applicable participation goals for MWBEs and workforce participation goals for minority and female employees.

##### **SECTION 2. COMPOSITION**

The Committee shall be jointly chaired by a designee of the Agency and the President of the Council. It may include representatives of the Local Unions and Contractors involved in the issues being discussed. The parties may mutually designate an MWBE representative to participate in appropriate Committee discussions. The Committee may conduct business through mutually agreed upon sub-committees.

#### **ARTICLE 9- GRIEVANCE & ARBITRATION PROCEDURE**

## SECTION 1. PROCEDURE FOR RESOLUTION OF GRIEVANCES

Any question, dispute or claim arising out of, or involving the interpretation or application of this Agreement (other than jurisdictional disputes or alleged violations of Article 7, Section 1) shall be considered a grievance and shall be resolved pursuant to the exclusive procedure of the steps described below, provided, in all cases, that the question, dispute or claim arose during the term of this Agreement.

### Step 1:

(a) When any employee covered by this Agreement feels aggrieved by a claimed violation of this Agreement, the employee shall, through the Local Union business representative or job steward give notice of the claimed violation to the work site representative of the involved Contractor and the Construction Manager. To be timely, such notice of the grievance must be given within 7 calendar days after the act, occurrence or event giving rise to the grievance. The business representative of the Local Union or the job steward and the work site representative of the involved Contractor shall meet and endeavor to adjust the matter within 7 calendar days after timely notice has been given. If they fail to resolve the matter within the prescribed period, the grieving party, may, within 7 calendar days thereafter, pursue Step 2 of the grievance procedure by serving the involved Contractor with written copies of the grievance setting forth a description of the claimed violation, the date on which the grievance occurred, and the provisions of the Agreement alleged to have been violated. Grievances and disputes settled at Step 1 are non-precedential except as to the specific Local Union, employee and Contractor directly involved unless the settlement is accepted in writing by the Construction Manager (or designee) as creating a precedent.

(b) Should any signatory to this Agreement have a dispute (excepting jurisdictional disputes or alleged violations of Article 7, Section 1) with any other signatory to

this Agreement and, if after conferring, a settlement is not reached within 7 calendar days, the dispute shall be reduced to writing and proceed to Step 2 in the same manner as outlined in subparagraph (a) for the adjustment of employee grievances.

**Step 2:**

The Business Manager or designee of the involved Local Union, together with representatives of the involved Contractor, Council and the Construction Manager (or designee), shall meet in Step 2 within 7 calendar days of service of the written grievance to arrive at a satisfactory settlement.

**Step 3:**

(a) If the grievance shall have been submitted but not resolved in Step 2, any of the participating Step 2 entities may, within 21 calendar days after the initial Step 2 meeting, submit the grievance in writing (copies to other participants, including the Construction Manager or designee) to J.J. Pierson or Richard Adelman, who shall act, alternately (beginning with Arbitrator J.J. Pierson), as the Arbitrator under this procedure. The Labor Arbitration Rules of the American Arbitration Association shall govern the conduct of the arbitration hearing, at which all Step 2 participants shall be parties. The decision of the Arbitrator shall be final and binding on the involved Contractor, Local Union and employees and the fees and expenses of such arbitrations shall be borne equally by the involved Contractor and Local Union.

(b) Failure of the grieving party to adhere to the time limits set forth in this Article shall render the grievance null and void. These time limits may be extended only by written consent of the Construction Manager (or designee), involved Contractor and involved Local Union at the particular step where the extension is agreed upon. The Arbitrator shall have authority to make decisions only on the issues presented to him and shall not have the authority to change, add to, delete or modify any provision of this Agreement.

**SECTION 2. LIMITATION AS TO RETROACTIVITY**

No arbitration decision or award may provide retroactivity of any kind exceeding 60 calendar days prior to the date of service of the written grievance on the Construction Manager and the involved Contractor or Local Union.

**SECTION 3. PARTICIPATION BY AGENCY AND/OR CONSTRUCTION MANAGER**

The Agency and Construction Manager (or such other designee of the Agency) shall be notified by the involved Contractor of all actions at Steps 2 and 3 and, at its election, may participate in full in all proceedings at these Steps, including Step 3 arbitration.

**ARTICLE 10 - JURISDICTIONAL DISPUTES**

**SECTION 1. NO DISRUPTIONS**

There will be no strikes, sympathy strikes, work stoppages, slowdowns, picketing or other disruptive activity of any kind arising out of any jurisdictional dispute. Pending the resolution of the dispute, the work shall continue uninterrupted and as assigned by the Contractor. No jurisdictional dispute shall excuse a violation of Article 7.

**SECTION 2. ASSIGNMENT**

All Program Work assignments shall be made by the Contractor to unions affiliated with the BCTC consistent with the New York Plan for the Settlement of Jurisdictional Disputes ("New York Plan") and its Greenbook decisions, if any. Where there are no applicable Greenbook decisions, assignments shall be made in accordance with the provisions of the New York Plan and local industry practice.

**SECTION 3. NO INTERFERENCE WITH WORK**

There shall be no interference or interruption of any kind with the Program Work while any jurisdictional dispute is being resolved. The work shall proceed as assigned by the

Contractor until finally resolved under the applicable procedure of this Article. The award shall be confirmed in writing to the involved parties. There shall be no strike, work stoppage or interruption in protest of any such award.

## **ARTICLE 11 - WAGES AND BENEFITS**

### **SECTION 1. CLASSIFICATION AND BASE HOURLY RATE**

All employees covered by this Agreement shall be classified in accordance with the work performed and paid the hourly wage rates applicable for those classifications as required by the applicable prevailing wage laws.

### **SECTION 2. EMPLOYEE BENEFITS**

A. The Contractors agree to pay on a timely basis contributions on behalf of all employees covered by this Agreement to those established jointly trustee employee benefit funds designated in Schedule A (in the appropriate Schedule A amounts), provided that such benefits are required to be paid on public works under any applicable prevailing wage law. Bona fide jointly trustee fringe benefit plans established or negotiated through collective bargaining during the life of this Agreement may be added if similarly required under applicable prevailing wage law. Contractors, not otherwise contractually bound to do so, shall not be required to contribute to benefits, trusts or plans of any kind which are not required by the prevailing wage law provided, however, that this provision does not relieve Contractors signatory to local collective bargaining agreement with any affiliated union from complying with the fringe benefit requirements for all funds contained in the CBA.

B. The Contractors agree to be bound by the written terms of the legally established jointly trustee Trust Agreements specifying the detailed basis on which payments are to be paid into, and benefits paid out of, such Trust Funds but only with regard to Program Work done under this Agreement and only for those employees to whom this Agreement

requires such benefit payments.

C. To the extent consistent with New York City's Procurement Policy Board Rules with respect to prompt payment, as published at [www.nyc.gov/ppb](http://www.nyc.gov/ppb), §4-06(e), and in consideration of the unions' waiver of their rights to withhold labor from a contractor or subcontractor delinquent in the payment of fringe benefits contributions ("Delinquent Contractor"); the Agency agrees that where any such union and/or fringe benefit fund shall notify the Agency, the General Contractor, and the Delinquent Contractor in writing with back-up documentation that the Delinquent Contractor has failed to make fringe benefit contributions to it as provided herein and the Delinquent Contractor shall fail, within ten (10) calendar days after receipt of such notice, to furnish either proof of such payment or notice that the amount claimed by the union and/or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by the Delinquent Contractor which the union or fringe benefit fund claims to be due it, and shall remit the amount when and so withheld to the fringe benefit fund and deduct such payment from the amounts then otherwise due and payable to the General Contractor, which payment shall, as between the General Contractor and the Agency, be deemed a payment by the Agency to the General Contractor; provided however, that in any month, such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. The union or its employee benefit funds shall include in its notification of delinquent payment of fringe benefits only such amount it asserts the Delinquent Contractor failed to pay on the specific project against which the claim is made and the union or its employee benefit funds may not include in such notification any amount such Delinquent Contractor may have failed to pay on any other City or non-City project.



D. In the event the General Contractor or Delinquent Contractor shall notify the Agency as above provided that the claim of the union or fringe benefit fund is in dispute, the Agency shall withhold from amounts then or thereafter becoming due and payable to the General Contractor an amount equal to that portion of such payment due to the General Contractor that relates solely to the work performed by the Delinquent Contractor which the union and/or fringe benefit fund claims to be due it, and deposit such amount when and so withheld in a separate interest-bearing account pending resolution of the dispute pursuant to the union's Schedule A agreement, and the amount so deposited together with the interest thereon shall be paid to the party or parties ultimately determined to be entitled thereto, or held until the Delinquent Contractor and union or fringe benefit fund shall otherwise agree as to the disposition thereof; provided however, that such withholding shall not exceed the amount contained in the General Contractor's monthly invoice for work performed by the Delinquent Contractor. In the event the Agency shall be required to withhold amounts from a General Contractor for the benefit of more than one fringe benefit fund, the amounts so withheld in the manner and amount prescribed above shall be applied to or for such fund in the order in which the written notices of nonpayment have been received by the Agency, and if more than one such notice was received on the same day, proportionately based upon the amount of the union and/or fringe benefit fund claims received on such day. Nothing herein contained shall prevent the Agency from commencing an interpleader action to determine entitlement to a disputed payment in accordance with section one thousand six of the civil practice law and rules or any successor provision thereto.

E. Payment to a fringe benefit fund under this provision shall not relieve the General Contractor or Delinquent Contractor from responsibility for the work covered by the payment. Except as otherwise provided, nothing contained herein shall create any obligation on

the part of the Agency to pay any union or fringe benefit fund, nor shall anything provided herein serve to create any relationship in contract or otherwise, implied or expressed, between the union/fund and/or fringe benefit and the Agency.

**ARTICLE 12- HOURS OF WORK, PREMIUM PAYMENTS,  
SHIFTS AND HOLIDAYS**

**SECTION 1. WORK WEEK AND WORK DAY**

A. The standard work week shall consist of 40 hours of work at straight time rates, Monday through Friday, 8 hours per day, plus ½ hour unpaid lunch period.

B. In accordance with Program needs, there shall be flexible start times with advance notice from Contractor to the Union. The Day Shift shall commence between the hours of 6:00 a.m. and 9:00 a.m. and shall end between the hours of 2:30 p.m. and 5:30 p.m., for an 8 hour day, and up to 7:30 p.m. for a 10 hour day. The Evening Shift shall commence between the hours of 3:00 p.m. and 6:00 p.m., unless different times are necessitated by the Agency's phasing plans on specific projects. The Night Shift shall commence between the hours of 11:00 p.m. and 2:00 a.m., unless different times are necessitated by the Agency's phasing plans on specific projects. Subject to the foregoing, starting and quitting times shall occur at the Program Work site designated by the Contractor.

C. Scheduling - Monday through Friday is the standard work week; 8 hours of work plus ½ hour unpaid lunch. Notwithstanding any other provision of this Agreement, a contractor may schedule a four day work week, 10 hours per day at straight time rates, plus a ½ hour unpaid lunch, at the commencement of the job.

D. Notice - Contractors shall provide not less than 5 days prior notice to the Local Union involved as to the work week and work hour schedules to be worked or such lesser notice as may be mutually agreed upon.

## SECTION 2. OVERTIME

Overtime shall be paid for any work over eight (8) hours in a day where 5/8s is scheduled or for work over ten (10) hours in a day where 4/10s is scheduled and over forty (40) hours in a week, at time and one half (1½) Monday through Saturday. All overtime work performed on Sunday and Holidays will be paid pursuant to the applicable Schedule A. There shall be no stacking or pyramiding of overtime pay under any circumstances. There will be no restriction upon the Contractor's scheduling of overtime or the nondiscriminatory designation of employees who shall be worked, including the use of employees, other than those who have worked the regular or scheduled work week, at straight time rates. The Contractor shall have the right to schedule work so as to minimize overtime or schedule overtime as to some, but not all, of the crafts and whether or not of a continuous nature.

## SECTION 3. SHIFTS

A. Flexible Schedules - Scheduling of shift work, including Saturday and Sunday work, shall be within the discretion of the Contractor in order to meet Program Work schedules and existing Program Work conditions including the minimization of interference with the mission of the Agency. It is not necessary to work a day shift in order to schedule a second or third shift, or a second shift in order to schedule a third shift, or to schedule all of the crafts when only certain crafts or employees are needed. Shifts must have prior approval of the Agency or Construction Manager, and must be scheduled with not less than five work days notice to the Local Union or such lesser notice as may be mutually agreed upon.

B. Second and/or Third Shifts/Saturday and/or Sunday Work - - The second shift shall start between 3 p.m. and 6 p.m. and the third shift shall start between 11 p.m. and 2 a.m., subject to different times necessitated by the Agency phasing plans on specific projects. There shall be no reduction in shift hour work. With respect to second and third shift work there

shall be a 5% shift premium. No other premium or other payments for such work shall be required unless such work is in excess of 40 hours in the week. All employees within a classification performing Program Work will be paid at the same wage rate regardless of the shift or work scheduled work, subject only to the foregoing provisions.

C. Flexible Starting Times - Shift starting times will be adjusted by the Contractor as necessary to fulfill Program Work requirements subject to the notice requirements of paragraph A.

#### SECTION 4. HOLIDAYS

A. Schedule - There shall be 8 recognized holidays on the Project:

New Years Day	Labor Day
Martin Luther King Day	President's Day
Memorial Day	Thanksgiving Day
Independence Day	Christmas Day

All said holidays shall be observed on the calendar date except those holidays which occur on Saturday shall be observed on the previous Friday and those that occur on Sunday shall be observed on the following Monday.

B. Payment - Regular holiday pay, if any, for work performed on such a recognized holiday shall be in accordance with the applicable Schedule A.

C. Exclusivity - No holidays other than those listed in Section 4(A) above shall be recognized or observed.

#### SECTION 5. SATURDAY MAKE-UP DAYS

When severe weather, power failure, fire or natural disaster or other similar circumstances beyond the control of the Contractor prevent work from being performed on a regularly scheduled weekday, the Contractor may schedule a Saturday make-up day and such

time shall be scheduled and paid as if performed on a weekday. Any other Saturday work shall be paid at time and one-half (1½). The Contractor shall notify the Local Union on the missed day or as soon thereafter as practicable if such a make-up day is to be worked.

#### SECTION 6. REPORTING PAY

A. Employees who report to the work location pursuant to their regular schedule and who are not provided with work shall be paid two hours reporting pay at straight time rates. An employee whose work is terminated early by a Contractor due to severe weather, power failure, fire or natural disaster or for similar circumstances beyond the Contractor's control, shall receive pay only for such time as is actually worked. In other instances in which an employee's work is terminated early (unless provided otherwise elsewhere in this Agreement), the employee shall be paid for his full shift.

B. When an employee, who has completed their scheduled shift and left the Program Work site, is "called out" to perform special work of a casual, incidental or irregular nature, the employee shall receive overtime pay at the rate of time and one-half of the employee's straight time rate for hours actually worked.

C. When an employee leaves the job or work location of their own volition or is discharged for cause or is not working as a result of the Contractor's invocation of Section 7 below, they shall be paid only for the actual time worked.

D. Except as specifically set forth in this Article there shall be no premiums, bonuses, hazardous duty, high time or other special premium payments or reduction in shift hours of any kind.

E. There shall be no pay for time not actually worked except as specifically set forth in this Article and except where an applicable Schedule A requires a full weeks' pay for forepersons.

### **SECTION 7. PAYMENT OF WAGES**

A. Termination- Employees who are laid off or discharged for cause shall be paid in full for that which is due them at the time of termination. The Contractor shall also provide the employee with a written statement setting forth the date of lay off or discharge.

### **SECTION 8. EMERGENCY WORK SUSPENSION**

A Contractor may, if considered necessary for the protection of life and/or safety of employees or others, suspend all or a portion of Program Work. In such instances, employees will be paid for actual time worked, except that when a Contractor requests that employees remain at the job site available for work, employees will be paid for that time at their hourly rate of pay.

### **SECTION 9. INJURY/DISABILITY**

An employee who, after commencing work, suffers a work-related injury or disability while performing work duties, shall receive no less than 8 hours wages for that day. Further, the employee shall be rehired at such time as able to return to duties provided there is still Program Work available for which the employee is qualified and able to perform.

### **SECTION 10. TIME KEEPING**

A Contractor may utilize brassing or other systems to check employees in and out. Each employee must check in and out. The Contractor will provide adequate facilities for checking in and out in an expeditious manner.

### **SECTION 11. MEAL PERIOD**

A Contractor shall schedule an unpaid period of not more than 1/2 hour duration at the work location between the 3rd and 5th hour of the scheduled shift. A Contractor may, for efficiency of operation, establish a schedule which coordinates the meal periods of two or more crafts or which provides for staggered lunch periods within a craft or trade. If an employee is

required to work through the meal period, the employee shall be compensated in a manner established in the applicable Schedule A.

## **SECTION 12. BREAK PERIODS**

There will be no rest periods, organized coffee breaks or other non-working time established during working hours. Individual coffee containers will be permitted at the employee's work location. Where 4/10s are being worked there shall be a morning and an afternoon coffee break.

## **ARTICLE 13 - APPRENTICES**

### **SECTION 1. RATIOS**

Recognizing the need to maintain continuing supportive programs designed to develop adequate numbers of competent workers in the construction industry and to provide craft entry opportunities for minorities, women and economically disadvantaged non-minority males, Contractors will employ apprentices in their respective crafts to perform such work as is within their capabilities and which is customarily performed by the craft in which they are indentured. Contractors may utilize apprentices and such other appropriate classifications in the maximum ratio permitted by the New York State Department of Labor or the maximum allowed per trade. Apprentices and such other classifications as are appropriate shall be employed in a manner consistent with the provisions of the appropriate Schedule A. The parties encourage, as an appropriate source of apprentice recruitment consistent with the rules and operations of the affiliated unions' apprentice-programs, the use of the Edward J. Malloy Initiative for Construction Skills, Non-Traditional Employment for Women and Helmets to Hardhats.

## **ARTICLE 14-SAFETY PROTECTION OF PERSON AND PROPERTY**

### **SECTION 1. SAFETY REQUIREMENTS**

Each Contractor will ensure that applicable OSHA and safety requirements are at all times maintained on the Program Work site and the employees and Unions agree to cooperate fully with these efforts to the extent consistent with their rights and obligations under the law. Employees will cooperate with employer safety policies and will perform their work at all times in a safe manner and protect themselves and the property of the Contractor and Agency from injury or harm, to the extent consistent with their rights and obligations under the law. Failure to do so will be grounds for discipline, including discharge.

### **SECTION 2. CONTRACTOR RULES**

Employees covered by this Agreement shall at all times be bound by the reasonable safety, security, and visitor rules as established by the Contractors and the Construction Manager for this Program Work. Such rules will be published and posted in conspicuous places throughout the Program Work sites. Any site security and access policies established by the Construction Manager or General Contractor intended for specific application to the construction workforce for Program Work and that are not established pursuant to an Agency directive shall be implemented only after notice to the BCTC and its affiliates and an opportunity for negotiation and resolution by the Labor Management Committee.

### **SECTION 3. INSPECTIONS**

The Contractors and Construction Manager retain the right to inspect incoming shipments of equipment, apparatus, machinery and construction materials of every kind.

### **ARTICLE 15 - TEMPORARY SERVICES**

Temporary services, i.e. all temporary heat, water, power and light, shall only be required upon the specific request of the Agency or Construction Manager, and when so requested shall be assigned to the appropriate trade claiming jurisdiction. Temporary system coverage shall be provided by the appropriate Contractors' existing employees during working hours in which a



shift is scheduled for employees of this Contractor. The Agency or Construction Manager may determine the need for temporary system coverage requirements during non-working hours. There shall be no stacking of trades on temporary services. In the event a temporary system is claimed by multiple trades, the matter shall be resolved through the New York Plan for Jurisdictional Disputes.

## **ARTICLE 16 - NO DISCRIMINATION**

### **SECTION 1. COOPERATIVE EFFORTS**

The Contractors and Unions agree that they will not discriminate against any employee or applicant for employment because of creed, race, color, religion, sex, sexual orientation, national origin, marital status, citizenship status, disability, age or any other status provided by law, in any manner prohibited by law or regulation.

### **SECTION 2. LANGUAGE OF AGREEMENT**

The use of the masculine or feminine gender in this Agreement shall be construed as including both genders.

## **ARTICLE 17- GENERAL TERMS**

### **SECTION 1. PROJECT RULES**

A. The Construction Manager and the Contractors shall establish such reasonable Program Work rules that are not inconsistent with this Agreement or rules common in the industry and are reasonably related to the nature of work. These rules will be explained at the pre-job conference and posted at the Program Work sites and may be amended thereafter as necessary. Notice of amendments will be provided to the appropriate Local Union. Failure of an employee to observe these rules and regulations shall be grounds for discipline, including discharge. The fact that no order was posted prohibiting a certain type of misconduct shall not be a defense to an employee disciplined or discharged for such misconduct when the action taken is

for cause.

B. The parties adopt and incorporate the BCTC's Standards of Excellence as annexed hereto as Exhibit "B".

### **SECTION 2. TOOLS OF THE TRADE**

The welding/cutting torch and chain fall are tools of the trade having jurisdiction over the work performed. Employees using these tools shall perform any of the work of the trade. There shall be no restrictions on the emergency use of any tools or equipment by any qualified employee or on the use of any tools or equipment for the performance of work within the employee's jurisdiction.

### **SECTION 3. SUPERVISION**

Employees shall work under the supervision of the craft foreperson or general foreperson.

### **SECTION 4. TRAVEL ALLOWANCES**

There shall be no payments for travel expenses, travel time, subsistence allowance or other such reimbursements or special pay except as expressly set forth in this Agreement.

### **SECTION 5. FULL WORK DAY**

Employees shall be at their work area at the starting time established by the Contractor, provided they are provided access to the work area. The signatories reaffirm their policy of a fair day's work for a fair day's wage.

### **SECTION 6. COOPERATION AND WAIVER**

The Construction Manager, Contractors and the Unions will cooperate in seeking any NYS Department of Labor, or any other government, approvals that may be needed for implementation of any terms of this Agreement. In addition, the Council, on their own behalf and

on behalf of its participating affiliated Local Unions and their individual members, intend the provisions of this Agreement to control to the greatest extent permitted by law, notwithstanding contrary provisions of any applicable prevailing wage, or other, law and intend this Agreement to constitute a waiver of any such prevailing wage, or other, law to the greatest extent permissible only for work within the scope of this Agreement, including specifically, but not limited to those provisions relating to shift, night, and similar differentials and premiums. This Agreement does not, however, constitute a waiver or modification of the prevailing wage schedules applicable to work not covered by this Agreement.

#### **ARTICLE 18. SAVINGS AND SEPARABILITY**

##### **SECTION 1. THIS AGREEMENT**

In the event that the application of any provision of this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, or if such application may cause the loss of Program funding or any New York State Labor Law exemption for all or any part of the Program Work, the provision or provisions involved (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the remainder of the Agreement shall remain in full force and effect to the extent allowed by law (and to the extent no funding or exemption is lost), unless the part or parts so found to be in violation of law or to cause such loss are wholly inseparable from the remaining portions of the Agreement and/or are material to the purposes of the Agreement. In the event a court of competent jurisdiction finds any portion of the Agreement to trigger the foregoing, the parties will immediately enter into negotiations concerning the substance affected by such decision for the purpose of achieving conformity with the court determination and the intent of the parties hereto for contracts to be let in the future.

## SECTION 2. THE BID SPECIFICATIONS

In the event that the Agency's (or Construction Manager's) bid specifications, or other action, requiring that a successful bidder (and subcontractor) become signatory to this Agreement is enjoined, on either an interlocutory or permanent basis, or is otherwise determined to be in violation of law, or may cause the loss of Program funding or any New York State Labor Law exemption for all or any part of the Program Work, such requirement (and/or its application to particular Program Work, as necessary) shall be rendered, temporarily or permanently, null and void, but where practicable the Agreement shall remain in full force and effect to the extent allowed by law and to the extent no funding or exemption is lost). In such event, the Agreement shall remain in effect for contracts already bid and awarded or in construction only where the Agency and Contractor voluntarily accepts the Agreement. The parties will enter into negotiations as to modifications to the Agreement to reflect the court or other action taken and the intent of the parties for contracts to be let in the future.

## SECTION 3. NON-LIABILITY

In the event of an occurrence referenced in Section 1 or Section 2 of this Article, neither the Agency, the Construction Manager, any Contractor, nor any Union shall be liable, directly or indirectly, for any action taken, or not taken, to comply with any court order or injunction, other determination, or in order to maintain funding or a New York State Labor Law exemption for Program Work. Bid specifications will be issued in conformance with court orders then in effect and no retroactive payments or other action will be required if the original court determination is ultimately reversed.

## SECTION 4. NON-WAIVER

Nothing in this Article shall be construed as waiving the prohibitions of Article 7 as to signatory Contractors and signatory Unions.

**ARTICLE 19 - FUTURE CHANGES IN SCHEDULE A AREA CONTRACTS**

**SECTION 1. CHANGES TO AREA CONTRACTS**

A. Schedule A to this Agreement shall continue in full force and effect until the Contractor and/or Union parties to the Area Collective Bargaining Agreements which are the basis for Schedule A notify the Agency and Construction Manager in writing of the hourly rate changes agreed to in that Area Collective Bargaining which are applicable to work covered by this Agreement and their effective dates.

B. It is agreed that any provisions negotiated into Schedule A collective bargaining agreements will not apply to work under this Agreement if such provisions are less favorable to those uniformly required of contractors for construction work normally covered by those agreements; nor shall any provision be recognized or applied on Program Work if it may be construed to apply exclusively, or predominantly, to work covered by this Agreement.

C. Any disagreement between signatories to this Agreement over the incorporation into Schedule A of provisions agreed upon in the renegotiation of Area Collective Bargaining Agreements shall be resolved in accordance with the procedure set forth in Article 9 of this Agreement.

**SECTION 2. LABOR DISPUTES DURING AREA CONTRACT NEGOTIATIONS**

The Unions agree that there will be no strikes, work stoppages, sympathy actions, picketing, slowdowns or other disruptive activity or other violations of Article 7 affecting the Program Work by any Local Union involved in the renegotiation of Area Local Collective Bargaining Agreements nor shall there be any lock-out on such Program Work affecting a Local Union during the course of such renegotiations.

**ARTICLE 20 - WORKERS' COMPENSATION ADR**

**SECTION 1.**

An ADR program may be negotiated and participation in the ADR Program will be optional by trade.

## **ARTICLE 21 - HELMETS TO HARDHATS**

### **Section 1.**

The Contractors and the Unions recognize a desire to facilitate the entry into the building and construction trades of veterans who are interested in careers in the building and construction industry. The Contractors and Unions agree to utilize the services of the Center for Military Recruitment, Assessment and Veterans Employment (hereinafter "Center") and the Center's "Helmets to Hardhats" program to serve as a resource for preliminary orientation, assessment of construction aptitude, referral to apprenticeship programs or hiring halls, counseling and mentoring, support network, employment opportunities and other needs as identified by the parties.

### **Section 2.**

The Unions and Contractors agree to coordinate with the Center to create and maintain an integrated database of veterans interested in working on this Project and of apprenticeship and employment opportunities for this Project. To the extent permitted by law, the Unions will give credit to such veterans for bona fide, provable past experience.

IN WITNESS WHEREOF the parties have caused this Agreement to be executed and effective  
as of the \_\_\_ day of \_\_\_\_\_, \_\_\_\_\_

FOR BUILDING AND CONSTRUCTION TRADES COUNCIL  
OF GREATER NEW YORK AND VICINITY

BY: Gary LaBarbera  
Gary LaBarbera  
President

FOR NEW YORK CITY

BY: \_\_\_\_\_  
Michael R. Bloomberg  
Mayor

APPROVED AS TO FORM:


\_\_\_\_\_  
ACTING CORPORATION COUNSEL  
NEW YORK CITY

IN WITNESS WHEREOF the parties have caused this Agreement to be executed and effective  
as of the \_\_\_ day of \_\_\_\_\_, \_\_\_\_\_

FOR BUILDING AND CONSTRUCTION TRADES COUNCIL  
OF GREATER NEW YORK AND VICINITY

BY: \_\_\_\_\_  
Gary LaBarbera  
President

FOR NEW YORK CITY

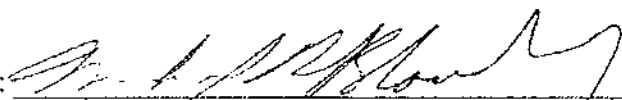BY:   
Michael R. Bloomberg  
Mayor

APPROVED AS TO FORM:

  
ACTING CORPORATION COUNSEL  
NEW YORK CITY

DEC 1 8 2009



## List of Signatory Unions

Blasterers and Drillers Local #29

Bricklayers Local No. 1

Boiler Makers Local No. 5

Carpenters District Council

Cement Masons No. 780

Derrickmen and Riggers Union No. 197

Concrete Workers District Council No. 16, including Cement and Concrete Workers Nos. 6-A, 18-A, and 20

Electrical Local No. 3

Drywall Tapers 1974

Elevator Constructors No. 1

Heat & Frost Insulators Local Union No. 12A

Heat & Frost Insulators Local Union No. 12

Iron Workers No. 40

Iron Workers District Council

Laborers Local No. 78 Asbestos & Lead Abatement

Iron Workers No. 361

Laborers Construction and General Building No. 79

Laborers Local 731

Lathers Metallic Local No. 46

Local Union 8A Glaziers No. 1281

Mason Tenders District Council

Metal Polishers DC 9

Painters District Council No. 9

Painters Structural Steel No. 806

Ornamental Iron Workers No. 580

Plasters Local Union No. 262

Pavers & Road Builders District Council No. 1

Plumbers No. 1

Sheet Metal Workers Local No. 28

Roofers & Waterproofers No. 8

Sheet Metal Workers Local No. 137

Steamfitters Local Union No. 638; including Metal Trades Division

Teamsters Local Union 813

Teamsters Local Union 814

Tile, Marble & Terrazzo B.A.C. Local Union No. 7

### PLA Schedule A

The following Collective Bargaining Agreements, as this Schedule may be amended from time to time in accordance with the Agreement, constitute Schedule A:

- (1) Agreement between the Boilermakers Association of Greater New York, Inc. and the International Brotherhood of Boilermakers, Iron Ship Builders, Blacksmiths, Forgers and Helpers AFL-CIO, Lodge No. 5, September 1, 2006 - December 31, 2009.
- (2) Agreement between Association of Cement and Concrete Contractors of New York, Inc. and Cement and Concrete Workers comprised of Local No. 6A, Local No. 18A, Local No. 20 and the Employer, July 1, 2008 - June 30, 2011.
- (3) Agreement between the Cement League and the District Council of Cement and Concrete Workers; Comprised of Local No. 6A, Local No. 18A, Local No. 20; July 1, 2008 - June 30, 2011.
- (4) Agreement between the Cement League and the United Cement Masons' Union Local No. 780, Clarified & Extended from October 23, 1940 to June 30, 2011.
- (5) Building Construction agreement between the Building Contractors Association, Inc. and the District Council of New York City and Vicinity of the United Brotherhood of Carpenters and Joiners of America, AFL-CIO, July 1, 2006 - June 30, 2011.
- (6) General Contractors Association - Carpenters 2006; Agreement Between Members of the General Contractors Association of New York, Inc. and the District Council of Carpenters of New York City and Vicinity, July 1, 2006 - June 30, 2011.
- (7) Trade Agreement between Drywall Tapers and Pointers of Greater New York Local Union 1974, affiliated with International Union of Painters and Allied Trades, AFL-CIO and Drywall Taping Contractors' Association of Greater New York and the Association of Wall-Ceiling & Carpentry Industry of New York, Inc., September 6, 2006 - June 28, 2011; Independent Agreement between Local Union 1974 and Employer.
- (8) Agreement between Allied Building Metal Industries, Inc. and Local Union Nos. 40 and 361 of the International Association of Bridge, Structural and Ornamental and Reinforcing Iron Workers AFL-CIO, July 1, 2008 - June 30, 2014.
- (9) Agreement between Independent Contractors and Local #46 Metallic Lathers Union and Reinforcing Ironworkers of New York and Vicinity of the International Association of Bridge, Structural, Ornamental and Reinforcing Iron Workers, July 1, 2008 - June 30, 2014.
- (10) Agreement of Working Conditions between the Independent Insulation Contractors Association of New York City Inc. and the International Association of Heat and Frost Insulators and Asbestos Workers Local No. 12 of New York City, 2008-2014.

(11) Mason Tenders District Council of Greater New York Master Independent Collective Bargaining Agreement, 2008-2011.

(12) Trade Agreement between District Council No. 9, International Union of Painters and Allied Trades, AFL-CIO and the Association of Master Painters and Decorators of New York, Inc. and the Association of Wall, Ceiling & Carpentry Industries of New York, Inc. and the Window and Plate Glass Dealers Association, May 1, 2005 - April 30, 2011.

(13) Trade Agreement between Enterprise Association Local Union 638 and Mechanical Contractors Association of New York, Inc., July 1, 2008 - June 30, 2011.

(14) Agreement between Allied Building Metal Industries Inc. and Architectural and Ornamental Iron Workers Local Union No. 580 AFL-CIO; July 1, 2008 - June 30, 2011.

(15) Official Working Agreement between Service Contractors Division of the Mechanical Contractors Association of New York and Enterprise Association Metal Trades Branch Local Union 638, July 1, 2007 - June 30, 2010.

(16) Agreement between Association of Contracting Plumbers of the City of New York, Inc. and Local Union No 1 of the United Association of Journeymen and Apprentices of the Plumbing and Pipe Fitting Industry of the United States and Canada, July 1, 2007 - June 30, 2010.

(17) Agreement and Working Rules between New York Electrical Contractors Association, Inc. and the Association of Electrical Contractors, Inc. and Local Union No. 3 International Brotherhood of Electrical Workers, AFL-CIO, May 10, 2007 - May 13, 2010.

(18) Official Working Agreement between Service Contractors Division of the Mechanical Contractors Association of New York, Inc. and Enterprise Association Metal Trades Branch Local Union 638, Refrigeration, Air Conditioning, Air Cooling, Oil Burner and Stoker Service and Maintenance Technicians, July 1, 2007 - June 30, 2010.

(19) Structural Steel and Bridge Painters of Greater New York, Local Union No. 806, District Council No. 9, International Union of Painters and Allied Trades, AFL-CIO, CLC and New York Structural Steel Painting Contractors Association, Inc.; Collective Bargaining Agreement, October 1, 2005 - September 30, 2011.

(20) Trade Agreement between United Derrickmen & Riggers Association, Local No. 197 of New York, All long Island, Westchester and Vicinity and Building Stone and Pre-Case Contractors Association, 2008.

(21) Agreement between the Greater New York and New Jersey Tile Contractors Association, Inc., and the Tile Setters and Tile Finishers Union of New York and New Jersey, Local Union No. 7 of the International Union of Bricklayers and Allied Craftworkers, June 8, 2009 - June 2, 2013.

(22) Agreement between The Building Contractors Association, Inc. and International Union of Operating Engineers Local 15 and 15 A, July 1, 2006-June 30, 2011.

(23) Agreement dated as of July 1, 2006 between Building Contractors Association and International Union of Operating Engineers Local 14-14B, July 1, 2006-June 30, 2011.

(24) Agreement Between The Building Contractors Association, Inc. and International Union of Operating Engineers Local 15D affiliated with the AFL-CIO, July 1, 2006-June 30, 2011.

(25) Local 282 International Brotherhood of Teamsters High Rise Contract, Building Contractors Association and Independents, 2008-2013.

(26) Building, Concrete, Excavation & Common Laborers Union Local No. 731 Independent Agreement, July 1, 2006-June 30, 2012.

(27) March 17, 2009 Agreement between ThyssenKrupp Elevator Corp. and International Union of Elevator Constructors, Local 1 of NY and NJ, 2009-2014.

(28) Working Agreement Local Union No. 8 United Union of Roofers, Waterproofers and Allied Workers and Roofing and Waterproofing Contractor's Association of New York and Vicinity, July 1, 2009-June 30, 2011.

(29) Standard Form Collective Bargaining Agreement between Sheet Metal Workers' International Association Local Union #137 and the Greater New York Sign Association, July 16, 2007 - July 15, 2010.

(30) Trade Agreement between \_\_\_\_\_ and Local No. 1 New York of the International Union of Bricklayers and Allied Craftworkers, July 1, 2008 - July 30, 2011.

**THIS PAGE INTENTIONALLY LEFT BLANK**

Project Labor Agreement - - Letter of Assent

Dear:

The undersigned party confirms that it agrees to be a party to and be bound by the New York Agency, Project Labor Agreement as such Agreement may, from time to time, be amended by the parties or interpreted pursuant to its terms. The terms of the Project Labor Agreement, its Schedules, Addenda and Exhibits are hereby incorporated by reference herein.

The undersigned, as a Contractor or Subcontractor (hereinafter Contractor) on the Project known as \_\_\_\_\_ and located at \_\_\_\_\_ (hereinafter PROJECT), for and in consideration of the award to it of a contract to perform work on said PROJECT, and in further consideration of the mutual promises made in the Project Labor Agreement, a copy of which was received and is acknowledged, hereby:

- (1) Accepts and agrees to be bound by the terms and conditions of the Agreement, together with any and all schedules; amendments and supplements now existing or which are later made thereto;
- (2) Agrees to be bound by the legally established collective bargaining agreements and local trust agreements as set forth in the Project Labor Agreement and this Agreement but only to the extent of Program Work and as required by the PLA.
- (3) Authorizes the parties to such local trust agreements to appoint trustees and successor trustees to administer the trust funds and hereby ratifies and accepts the trustees so appointed as if made by the Contractor but only to the extent of Program Work as required by the PLA.
- (4) Certifies that it has no commitments or agreements that would preclude its full and complete compliance with the terms and conditions of said Agreement. The Contractor agrees to employ labor that can work in harmony with all other labor on the Project and shall require labor harmony from every lower tier subcontractor it has engaged or may engage to work on the Project. Labor harmony disputes/issues shall be subject to the Labor Management Committee provisions.
- (5) Agrees to secure from any Contractor(s) (as defined in said Agreement) which is or becomes a Subcontractor (of any tier), to it, a duly executed Agreement to be Bound in from identical to this document.

Dated: \_\_\_\_\_

\_\_\_\_\_  
(Name of Contractor or subcontractor)

\_\_\_\_\_  
(Name of CM; GC; Contractor or Higher Level Subcontractor)

\_\_\_\_\_  
(Authorized Officer & Title)

\_\_\_\_\_  
(Address)

\_\_\_\_\_  
(Phone) (Fax)

\_\_\_\_\_  
Contractor's State License #

Sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 2009

\_\_\_\_\_  
Notary Public

### STANDARDS OF EXCELLENCE

The purpose of this Standard of Excellence is to reinforce the pride of every construction worker and the commitment to be the most skilled, most productive and safest workforce available to construction employers and users in the City of New York. It is the commitment of every affiliated local union to use our training and skills to produce the highest quality work and to exercise safe and productive work practices.

The rank and file members represented by the affiliated local unions acknowledge and adopt the following standards:

- *Provide a full days work for a full days pay;*
- *Safely work towards the timely completion of the job;*
- *Arrive to work on time and work until the contractual quitting time;*
- *Adhere to contractual lunch and break times;*
- *Promote a drug and alcohol free work site;*
- *Work in accordance with all applicable safety rules and procedures;*
- *Allow union representatives to handle job site disputes and grievances without resort to slowdowns, or unlawful job disruptions;*
- *Respect management directives that are safe, reasonable and legitimate;*
- *Respect the rights of co-workers;*
- *Respect the property rights of the owner, management and contractors.*

The Unions affiliated with the New York City Building and Construction Trades Council will expect the signatory contractors to safely and efficiently manage their jobs and the unions see this as a corresponding obligation of the contractors under this Standard of Excellence. The affiliated unions will expect the following from its signatory contractors:

- *Management adherence to the collective bargaining agreements;*
- *Communication and cooperation with the trade foremen and stewards;*
- *Efficient, safe and sanitary management of the job site;*
- *Efficient job scheduling to mitigate and minimize unproductive time;*
- *Efficient and adequate staffing by properly trained employees by trade;*
- *Efficient delivery schedules and availability of equipment and tools to ensure efficient job progress;*
- *Ensure proper blueprints, specifications and layout instructions and material are available in a timely manner*
- *Promote job site dispute resolution and leadership skills to mitigate such disputes;*
- *Treatment of all employees in a respectful and dignified manner acknowledging their contributions to a successful project.*

The affiliated unions and their signatory contractors shall ensure that both the rank and file members and the management staff shall be properly trained in the obligations undertaken in the Standard of Excellence.



# NOTICE TO BIDDERS

Please be advised that the City of New York has issued a new Standard Construction Contract. The new Contract, which is incorporated in this bid, is significantly different from the 2008 version previously used by the City. A listing of some of the significant changes is provided below. This notice is only a partial listing. Please refer to the Contract itself for a full understanding of the changes and the actual text of the changes that were made. The text of the revised Standard Construction Contract is the controlling document should there be any discrepancies between this notice and the Standard Construction Contract.

Significant changes include the following:

## ARTICLE 11      DAMAGES CAUSED BY DELAYS

In 2008, the City embarked on a pilot project to test the use of new construction contract language altering the allocation of the risk of project delays, as between the City and the contractor. The City has determined to make the pilot project language the standard language for all City construction contracts. Accordingly, there is now one Standard City Construction Contract that it to be used by all agencies for all bids released after the release of the new contract. The damages for delay language is Article 11. Please note that changes have been made to the damages for delay provisions from the pilot to the adopted version.

## ARTICLE 22      INSURANCE

Changes have been made to the insurance provisions, including incorporating requirements that the insurance provided comply with recent NYC Department of Buildings regulations specifying required dollar limits for CGL insurance for certain projects and requiring proof of builder's risk insurance prior to Work commencing rather than within 10 days of award.

**ARTICLE 26        EXTRA WORK**

The percentage paid for overhead for Extra Work pursuant to Section 26.1.11 is increased from 10% to 12% and the calculation of Worker's Compensation insurance costs reimbursed for Extra Work has been clarified.

**ARTICLE 37        LABOR LAW REQUIREMENTS**  
**ARTICLE 38        PAYROLL REPORTS**

The provisions governing Labor Law provisions have been tightened, including requirements the employee identification cards include a photo (unless the requirement is waived), a prohibition on cash payments to employees and subcontractors, and clear enforcement authority requirements.

**ARTICLE 70        ELECTRONIC FILING**

A provision is added to make mandatory the electronic filing of certain alteration permits with the Department of Buildings.

**Other significant changes include the following:**

**ARTICLE 7        INDEMNIFICATION**

Changes have been made to the indemnification provisions.

**ARTICLE 14        FINAL ACCEPTANCE OF WORK**  
**ARTICLE 44        SUBSTANTIAL COMPLETION PAYMENT**

The Commissioner is no longer required to issue a substantial completion determination in addition to the already existing requirement that the Engineer issue a substantial completion determination and reach an agreement on a punch list of remaining work. Now, the Engineer, when issuing the punch list to the Contractor, must also include a proposed schedule for the completion of the punch list. The Contractor may propose an alternative schedule that is subject to the approval of the Engineer. If the Contractor fails to respond to the Engineer's proposed schedule, the Engineer's schedule is deemed accepted.

**ARTICLE 15        LIQUIDATED DAMAGES**

The contract is revised to match Schedule A to provide that liquidated damages are available only until substantial completion.

**ARTICLE 17            SUBCONTRACTS**

The requirements for prior approval of subcontractors, and for contractors to be responsible for the actions of their subcontractors, have been tightened. The requirement that the Contractor list subcontractors in the City's Payee Information Portal has been added; the provision was previously attached as a rider.

**ARTICLE 19            SECURITY DEPOSIT**

The provisions governing the return of bid deposits are clarified.

**ARTICLE 20            PAYMENT GUARANTEE**

The Payment Guaranty provisions, which apply when the City does not require the Contractor to obtain payment bonds, has been significantly revised to track the requirements of State Finance law 137.

**ARTICLE 28            RECORDKEEPING FOR EXTRA OR DISPUTED WORK**

The recordkeeping requirement that currently apply to payments for Time & Materials for extra work are expressly made applicable to regular work that is paid for on a T & M basis.

**ARTICLE 35            EMPLOYEES**

The whistleblower provisions of local law are added to the construction contract. They previously have been attached as a rider.

**ARTICLE 38            PAYROLL REPORTS  
ARTICLE 77            RECORDS RETENTION**

Requirements that records be maintained for six years and directions on how such records must be made available.

**ARTICLE 42            PARTIAL PAYMENTS**

Increased flexibility has been provided for when contractors may submit invoices.

**ARTICLE 62            TAX EXEMPTION**

The provisions identifying the State tax exemption for municipalities are revised to more clearly describe State law.



**CITY OF NEW YORK**  
**DEPARTMENT OF**  
**DESIGN AND CONSTRUCTION**  
**DIVISION OF PUBLIC BUILDINGS**

**INFORMATION FOR BIDDERS**

**December 2013**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## INFORMATION FOR BIDDERS

### 1. Description and Location of Work

The description and location of the work for which bids are requested are specified in Attachment 1, "Bid Information". Attachment 1 is included in the Bid Booklet.

### 2. Time and Place for Receipt of Bids

Sealed bids shall be received on or before the date and hour specified in Attachment 1, at which time they will be publicly opened and read aloud in the presence of the Commissioner or his or her representative, and any bidders who may desire to be present.

### 3. Definitions

The definitions set forth in the Procurement Policy Board Rules shall apply to this Invitation For Bids.

### 4. Invitation For Bids and Contract Documents

(A) Except for titles, sub-titles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience) the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of the Contract and the Invitation for Bids.

- (1) All provisions required by law to be inserted in this Contract, whether actually inserted or not
- (2) The Contract Drawings and Specifications
- (3) The General Conditions, the General Requirements and the Special Conditions, if any
- (4) The Contract
- (5) The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet
- (6) The Budget Director's Certificate; all Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed with the Work.

(B) For particulars as to this procurement, including quantity and quality of the purchase, extent of the work or labor to be performed, delivery and performance schedule, and any other special instructions, prospective bidders are referred to the Invitation For Bids Documents. A copy of such documents can be obtained at the location set forth in Attachment 1.

(C) Deposit for Copy of Invitation For Bids Documents: Prospective bidders may obtain a copy of the Invitation For Bids Documents by complying with the conditions set forth in the Notice of Solicitation. The deposit must be in the form of a check or money order made payable to the City of New York, and drawn upon a state or national bank or trust company, or a check of such bank or trust company signed by a duly authorized officer thereof.

(D) Return of Invitation For Bids Documents: All Invitation For Bids Documents must be returned to the Department upon request. If the bidder elects not to submit a bid thereunder, the Invitation For Bids Documents shall be returned to the Department, along with a statement that no bid will be submitted.

(E) Return of Deposit: Such deposit will be returned within 30 days after the award of the contract or the rejection of all bids as set forth in the advertisement, provided the Invitation For Bids Documents are returned to the location specified in Attachment 1, in physical condition satisfactory to the Commissioner.

(F) Additional Copies: Additional copies of the Invitation For Bids Documents may be obtained, subject to the conditions set forth in the advertisement for bids.

5. Pre-Bid Conference

A pre-bid conference shall be held as set forth in Attachment 1. Nothing stated at the pre-bid conference shall change the terms or conditions of the Invitation For Bids Documents, unless a change is made by written amendment as provided in Section 9 below. Failure to attend a mandatory pre-bid conference shall constitute grounds for the rejection of the bid.

6. Agency Contact

Any questions or correspondence relating to this bid solicitation shall be addressed to the Agency Contact person specified in Attachment 1.

7. Bidder's Oath

(A) The bid shall be properly signed by an authorized representative of the bidder and the bid shall be verified by the written oath of the authorized representative who signed the bid, that the several matters stated and information furnished therein are in all aspects true.

(B) A materially false statement willfully or fraudulently made in connection with the bid or any of the forms completed and submitted with the bid may result in the termination of any Contract between the City and the Bidder. As a result, the Bidder may be barred from participating in future City contracts as well as be subject to possible criminal prosecution.

8. Examination and Viewing of Site, Consideration of Other Sources of Information and Changed Conditions

(A) Pre-Bidding (Investigation) Viewing of Site - Bidders must carefully view and examine the site of the proposed work, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions on, about or above the site relating to or affecting in any way the performance of the work to be done under the Contract which were or should have been indicated to a reasonably prudent bidder. To arrange a date for visiting the work site, bidders are to contact the Agency Contact person specified in Attachment 1.

(B) Should the contractor encounter during the progress of the work subsurface conditions at the site materially differing from any shown on the Contract Drawings or indicated in the Specifications or such subsurface conditions as could not reasonably have been anticipated by the contractor and were not anticipated by the City, which conditions will materially affect the cost of the work to be done under the Contract, the attention of the Commissioner must be called immediately to such conditions before they are disturbed. The Commissioner shall thereupon promptly investigate the conditions. If he finds that they do so materially differ, or that they could not reasonably have been anticipated by the contractor and were not anticipated by the City, the Contract may be modified with his written approval.

9. Examination of Proposed Contract

(A) Request for Interpretation or Correction: Prospective bidders must examine the Contract Documents carefully and before bidding must request the Commissioner in writing for an interpretation or correction of every patent ambiguity, inconsistency or error therein which should have been discovered by a reasonably prudent bidder. Such interpretation or correction, as well as any additional contract provisions the Commissioner may decide to include, will be issued in writing by the Commissioner as an addendum to the Contract, which will be transmitted to each person recorded as having received a copy of the Contract Documents from the Department. Transmission of such addendum will be by mail, e-mail, facsimile or hand delivery. Such addendum will also be posted at the place where the Contract Documents are available for the inspection of prospective bidders. Upon transmission as provided for herein, such addendum shall become a part of the Contract Documents, and binding on all bidders, whether or not actual notice of such addendum is shown.



(B) Only Commissioner's Interpretation or Correction Binding: Only the written interpretation or correction so given by the Commissioner shall be binding, and prospective bidders are warned that no other officer, agent or employee of the City is authorized to give information concerning, or to explain or interpret, the Contract.

(C) Documents given to a subcontractor for the purpose of soliciting the subcontractor's bid shall include either a copy of the bid cover sheet or a separate information sheet setting forth the project name, the Contract number (if available), the contracting agency and the Project's location.

10. Form of Bid

Each bid must be submitted upon the prescribed form and must contain: a) the name, residence and place of business of the person or persons making the same; b) the names of all persons interested therein, and if no other person is so interested, such fact must be distinctly stated; c) a statement to the effect that it is made without any connection with any other person making a bid for the same purpose and that it is in all respects fair and without collusion or fraud; d) a statement that no Council member or other officer or employee or person whose salary is payable in whole or part from the City Treasury is directly or indirectly interested therein or in the supplies, materials or equipment and work or labor to which it relates, or in any portion of the profits thereof; e) a statement that the bidder is not in arrears to the City or to any agency upon a debt or contract or taxes, and is not a defaulter as surety or otherwise upon any obligation to the City to any agency thereof, except as set forth in the bid.

THE BID SHALL BE TYPEWRITTEN OR WRITTEN LEGIBLY IN INK. THE BID SHALL BE SIGNED IN INK. ERASURES OR ALTERATIONS SHALL BE INITIALED BY THE SIGNER IN INK. FAILURE TO CONFORM TO THE REQUIREMENTS OF THIS SECTION 10 SHALL RESULT IN THE REJECTION OF THE BID.

11. Irrevocability of Bid

The prices set forth in the bid cannot be revoked and shall be effective until the award of the Contract, unless the bid is withdrawn as provided for in Sections 15 and 18 below.

12. Acknowledgment of Amendments

The receipt of any amendment to the Contract Documents shall be acknowledged by the bidder in its bid submission.

13. Bid Samples and Descriptive Literature

Bid samples and descriptive literature shall not be submitted by the bidder, unless expressly requested elsewhere in the Contract or Contract Documents. Any unsolicited bid samples or descriptive literature which are submitted shall not be examined or tested and shall not be deemed to vary any of the provisions of this Contract.

14. Proprietary Information/Trade Secrets

(A) The bidder shall identify those portions of the bid which it deems to be confidential, proprietary information or trade secrets, and provide justification why such materials shall not be disclosed by the City. All such materials shall be clearly indicated by stamping the pages on which such information appears, at the top and bottom thereof with the word "Confidential". Such materials stamped "Confidential" must be easily separable from the non-confidential sections of the bid.

(B) All such materials so indicated shall be reviewed by the Agency and any decision not to honor a request for confidentiality shall be communicated in writing to the bidder. For those bids which are unsuccessful, all such confidential materials shall be returned to the bidder. Prices, makes and model or catalog numbers of the items offered, deliveries, and terms of payment shall be publicly available after bid opening, regardless of any designation of confidentiality made by the bidder.

15. Pre-Opening Modification or Withdrawal of Bids

Bids may be modified or withdrawn by written notice received in the office designated in Attachment 1, before the time and date set for the bid opening. If a bid is withdrawn in accordance with this Section, the bid security, if any, shall be returned to the bidder.

16. Bid Evaluation and Award

In accordance with the New York City Charter, the Procurement Policy Board Rules and the terms and conditions of this Invitation For Bids, this Contract shall be awarded, if at all, to the responsible bidder whose bid meets the requirements and evaluation criteria set forth in the Invitation For Bids, and whose bid price is either the most favorable bid price or, if the Invitation For Bids so states, the most favorable evaluated bid price. A bid may not be evaluated for any requirement or criterion that is not disclosed in the Invitation For Bids.

Restriction: No negotiations with any bidder shall be allowed to take place except under the circumstances and in the manner set forth in Section 21. Nothing in this Section shall be deemed to permit a contract award to a bidder submitting a higher quality item than that designated in the Invitation For Bids, if that bid is not also the most favorable bid.

17. Late Bids, Late Withdrawals and Late Modifications

Any bid received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. Any request for withdrawal or modification received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. The exception to this provision is that a late modification of a successful bid that makes the bid terms more favorable to the City shall be considered at any time it is received.

18. Withdrawal of Bids.

Except as provided for in Section 15, above, a bidder may not withdraw its bid before the expiration of forty-five (45) days after the date of the opening of bids; thereafter, a bidder may withdraw its bid only in writing and in advance of an actual award. If within sixty (60) days after the execution of the Contract, the Commissioner fails to fix the date for commencement of work by written notice to the bidder, the bidder, at his option, may ask to be relieved of his obligation to perform the work called for by written notice to the Commissioner. If such notice is given to the Commissioner, and the request to withdraw is granted, the bidder waives all claims in connection with this Contract.

19. Mistake in Bids

(A) Mistake Discovered Before Bid Opening: A bidder may correct mistakes discovered before the time and date set for bid opening by withdrawing or correcting the bid as provided in Section 15 above.

(B) Mistakes Discovered Before Award

(1) In accordance with General Municipal Law (Section 103, subdivision 11), where a unilateral error or mistake is discovered in a bid, such bid may be withdrawn upon written approval of the Agency Chief Contracting Officer if the following conditions are met:

- (a) The mistake is known or made known to the agency prior to the awarding of the Contract or within 3 days after the opening of the bid, whichever period is shorter; and
- (b) The price bid was based upon an error of such magnitude that enforcement would be unconscionable; and

- (c) The bid was submitted in good faith and the bidder submits credible evidence that the mistake was a clerical error as opposed to a judgment error; and
- (d) The error in the bid is actually due to an unintentional and substantial arithmetic error or an unintentional omission of a substantial quantity of work, labor, material or services made directly in the compilation of the bid, which unintentional arithmetic error or unintentional omission can be clearly shown by objective evidence drawn from inspection of the original work paper, documents, or materials used in the preparation of the bid sought to be withdrawn; and
- (e) It is possible to place the agency in the same position as existed prior to the bid.

(2) Unless otherwise required by law, the sole remedy for a bid mistake in accordance with this Article shall be withdrawal of the bid, and the return of the bid bond or other security, if any, to the bidder. Thereafter, the agency may, in its discretion, award the Contract to the next lowest bidder or rebid the Contract. Any amendment to or reformation of a bid or a Contract to rectify such an error or mistake therein is strictly prohibited.

(3) If the mistake and the intended correct bid are clearly evident on the face of the bid document, the bid shall be corrected to the intended correct bid and may not be withdrawn. Examples of mistakes that may be corrected are typographical errors, errors in extending unit prices, transposition errors and arithmetical errors.

#### 20. Low Tie Bids

(A) When two or more low responsive bids from responsible bidders are identical in price, meeting all the requirements and criteria set forth in the Invitation For Bids, the Agency Chief Contracting Officer will break the tie in the following manner and order of priority:

- (1) Award to a certified New York City small, minority or woman-owned business entity bidder;
- (2) Award to a New York City bidder;
- (3) Award to a certified New York State small, minority or woman-owned business bidder;
- (4) Award to a New York State bidder.

(B) If two or more bidders still remain equally eligible after application of paragraph (A) above, award shall be made by a drawing by lot limited to those bidders. The bidders involved shall be invited to attend the drawing. A witness shall be present to verify the drawing and shall certify the results on the bid tabulation sheet.

#### 21. Rejection of Bids

(A) Rejection of Individual Bids: The Agency may reject a bid if:

- (1) The bidder fails to furnish any of the information required pursuant to Section 24 or 28 hereof; or if
- (2) The bidder is determined to be not responsible pursuant to the Procurement Policy Board Rules; or if
- (3) The bid is determined to be non-responsive pursuant to the Procurement Policy Board Rules; or if
- (4) The bid, in the opinion of the Agency Chief Contracting Officer, contains unbalanced bid prices and is thus non-responsive, unless the bidder can show that the prices are not unbalanced for the probable required quantity of items, or if the imbalance is corrected pursuant to Section 15.

(B) Rejection of All Bids: The Agency, upon written approval by the Agency Chief Contracting Officer, may reject all bids and may elect to resolicit bids if in its sole opinion it shall deem it in the best interest of the City so to do.

(C) Rejection of All Bids and Negotiation With All Responsible Bidders: The Agency Head may determine that it is appropriate to cancel the Invitation For Bids after bid opening and before award and to complete the acquisition by negotiation. This determination shall be based on one of the following reasons:

- (1) All otherwise acceptable bids received are at unreasonable prices, or only one bid is received and the Agency Chief Contracting Officer cannot determine the reasonableness of the bid price, or no responsive bid has been received from a responsible bidder; or
- (2) In the judgment of the Agency Chief Contracting Officer, the bids were not independently arrived at in open competition, were collusive, or were submitted in bad faith.

(D) When the Agency has determined that the Invitation for Bids is to be canceled and that use of negotiation is appropriate to complete the acquisition, the contracting officer may negotiate and award the Contract without issuing a new solicitation, subject to the following conditions:

- (1) prior notice of the intention to negotiate and a reasonable opportunity to negotiate have been given by the contracting officer to each responsible bidder that submitted a bid in response to the Invitation for Bids;
- (2) the negotiated price is the lowest negotiated price offered by a responsible bidder; and
- (3) the negotiated price is lower than the lowest rejected bid price of a responsible bidder that submitted a bid in response to the Invitation for Bids.

22. Right to Appeal Determinations of Non-Responsiveness or Non-Responsibility and Right to Protest Solicitations and Award

The bidder has the right to appeal a determination of non-responsiveness or non-responsibility and has the right to protest a solicitation and award. For further information concerning these rights, the bidder is directed to the Procurement Policy Board Rules.

23. Affirmative Action and Equal Employment Opportunity

This Invitation For Bids is subject to applicable provisions of Federal, State and Local Laws and executive orders requiring affirmative action and equal employment opportunity.

24. VENDEX Questionnaires

(A) Requirement: Pursuant to Administrative Code Section 6-116.2 and the PPB Rules, bidders may be obligated to complete and submit VENDEX Questionnaires. Generally, if this bid is \$100,000 or more, or if this bid when added to the sum total of all contracts, concessions and franchises the bidder has received from the City and any subcontracts received from City contractors over the past twelve months, equals or exceeds \$100,000, Vendex Questionnaires must be completed. If required, Vendex Questionnaires must be completed and submitted before any award of contract may be made or before approval is given for a proposed subcontractor. Non-compliance with these submission requirements may result in the disqualification of the bid, disapproval of a subcontractor, subsequent withdrawal of approval for the use of an approved subcontractor, or the cancellation of the contract after its award.

(B) Submission: Vendex Questionnaires must be submitted directly to the Mayor's Office of Contract Services, ATTN: Vendex, 253 Broadway, 9<sup>th</sup> Floor, New York, New York 10007. In addition, the bidder must submit a Confirmation of Vendex Compliance to the agency. A form for this confirmation is set forth in the Bid Booklet.

(C) Obtaining Forms: Vendex Questionnaires, as well as detailed instructions, may be obtained at [www.nyc.gov/vendex](http://www.nyc.gov/vendex). The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.

25. Complaints About the Bid Process

The New York City Comptroller is charged with the audit of contracts in New York City. Any vendor who believes that there has been unfairness, favoritism or impropriety in the bid process should inform the Comptroller, Office of Contract Administration, One Centre Street, Room 835, New York, New York; telephone number (212)669-2797.

26. Bid, Performance and Payment Security

(A) Bid Security: Each bid must be accompanied by bid security in an amount and type specified in Attachment 1. The bid security shall assure the City of New York of the adherence of the bidder to its proposal, the execution of the Contract, and the furnishing of Performance and Payment Bonds by the bidder, if required in Attachment 1. Bid security shall be returned to the bidder as follows:

- (1) Within ten (10) days after the bid opening, the Comptroller will be notified to return the deposits of all but the three (3) lowest bidders. Within five (5) days after the award, the Comptroller will be notified to return the deposits of the remaining two unsuccessful bidders.
- (2) Within five (5) days after the execution of the Contract and acceptance of the Contractor's bonds, the Comptroller will be notified to return the bid security of the successful bidder or, if performance and payment bonds are not required, only after the sum retained under Article 21 of the Contract equals the amount of the bid security.
- (3) Where all bids are rejected, the Comptroller will be notified to return the deposit of the three (3) lowest bidders at the time of rejection.

(B) Performance and Payment Security: Performance and Payment Security must be provided in an amount and type specified in Attachment 1. The performance and payment security shall be delivered by the contractor prior to or at the time of execution of the Contract. If a contractor fails to deliver the required performance and payment security, its bid security shall be enforced, and an award of Contract may be made to the next lowest responsible and responsive bidder, or the contract may be rebid.

(C) Acceptable Types of Security: Acceptable types of security for bids, performance, and payment shall be limited to the following:

- (1) a one-time bond in a form satisfactory to the City;
- (2) a bank certified check or money order;
- (3) obligations of the City of New York; or
- (4) other financial instruments as determined by the Office of Construction in consultation with the Comptroller.

Whenever the successful bidder deposits obligations of the City of New York as performance and payment security, the Comptroller may sell and use the proceeds thereof for any purpose for which the principal or surety on such bond would be liable under the terms of the Contract. If the money is deposited with the Comptroller, the successful bidder shall not be entitled to receive interest on such money from the City.

(D) Form of Bonds: Security provided in the form of bonds must be prepared on the form of bonds authorized by the City of New York. Forms for bid, performance, and payment bonds are included in the Invitation for Bids Documents. Such bonds must have as surety thereunder such surety company or companies as are: (1) approved by the City of New York; (2) authorized to do business in the State of New York, and (3) approved by the Department of the Treasury of the United States. Premiums for any required bonds must be included in the base bid.

The bidder is advised that submission of a bid bond where the surety on such bond fails to meet the criteria set forth herein, shall result in the rejection of the bid as non-responsive.

The Department of the Treasury of the United States advises that information concerning approved surety companies may be obtained as follows: (1) from the Government Printing Office at 202-512-1800; (2) through the Internet at <http://www.fms.treas.gov/c570/index.html>, and (3) through a computerized public bulletin board, which can be accessed by using your computer modem and dialing 202-874-6887.

(E) Power of Attorney: Attorneys in fact who sign bid, performance, or payment bonds must file with each bond a certified copy of their power of attorney to sign said bonds.

27. Failure to Execute Contract

In the event of failure of the successful bidder to execute the Contract and furnish the required security within ten (10) days after notice of the award of the Contract, the deposit of the successful bidder or so much thereof as shall be applicable to the amount of the award made shall be retained by the City, and the successful bidder shall be liable for and hereby agrees to pay on demand the difference between the price bid and the price for which such Contract shall be subsequently awarded, including the cost of any required reletting and less the amount of such deposit. No plea of mistake in such accepted bid shall be available to the bidder for the recovery of the deposit or as a defense to any action based upon such accepted bid. Further, should the bidder's failure to comply with this Section cause any funding agency, body or group (Federal, State, City, Public, Private, etc.) to terminate, cancel or reduce the funding on this project, the bidder in such event shall be liable also to the City for the amount of actual funding withdrawn by such agency on this project, less the amount of the forfeited deposit.

28. Bidder Responsibilities and Qualifications

(A) Bidders must include with their bids all information necessary for a determination of bidder responsibility, as set forth in the Specifications.

(B) The Agency may require any bidder or prospective bidder to furnish all books of account, records, vouchers, statements or other information concerning the bidder's financial status for examination as may be required by the Agency to ascertain the bidder's responsibility and capability to perform the Contract. If required, a bidder must also submit a sworn statement setting forth such information as the Agency may require concerning present and proposed plant and equipment, the personnel and qualifications of his working organizations, prior experience and performance record.

(C) Oral Examination on Qualifications: In addition thereto, and when directed by the Agency, the bidder, or a responsible officer, agent or employee of the bidder, must submit to an oral examination to be conducted by the Agency in relation to his proposed tentative plan and schedule of operations, and such other matters as the Agency may deem necessary in order to determine the bidder's ability and responsibility to perform the work in accordance with the Contract. Each person so examined must sign and verify a stenographic transcript of such examination noting thereon such corrections as such person may desire to make.

(D) If the bidder fails or refuses to supply any of the documents or information set forth in paragraph (B) hereof or fails to comply with any of the requirements thereof, the Agency may reject the bid.

29. Employment Report

In accordance with Executive Order No. 50 (1980) as modified by Executive Order 108 (1986), the filing of a completed Employment Report (ER) is a requirement of doing business with the City of New York for construction contractors with contracts of \$1,000,000 or more and subcontractors with construction subcontracts of \$750,000 or more. The required forms and information are included in the Bid Booklet.

30. Labor Law Requirements

(A) General: The successful bidder will be required to comply strictly with all Federal, State and local labor laws and regulations.

(B) New York State Labor Law: This Contract is subject to New York State Labor Law Section 220, which requires that construction workers on the site be paid prevailing wages and supplements. The Contractor is reminded that all wage provisions of this Contract will be enforced strictly and failure to comply will be considered when evaluating performance. Noncompliance may result in the contractor being debarred by the City from future contracts. Complaints filed with the Comptroller may result in decisions which may debar a contractor from bidding contracts with any state governmental entity and other political subdivisions.

(C) Records: The Contractor is expected to submit accurate payroll reports and other required documents and verify attendance and job classifications being utilized in compliance with the law, Contract provisions and agency procedures.

31. Insurance

(A) Bidders are advised that the insurance requirements contained herein are regarded as material terms of the Contract. As required by Article 22 of the Contract, the contractor must effect and maintain with companies licensed and authorized to do business in the State of New York, the types of insurance set forth therein, when required by and in the amounts set forth in Schedule A of the General Conditions. Such required insurance must be provided from the date the contractor is ordered to commence work and up to the date of final acceptance of all required work.

(B) The contractor must, within ten days of receipt of the notice of award, submit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A of the General Conditions, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by Section 57 of the New York State Workers' Compensation Law and Section 220 of the Disability Benefits Law.

32. Lump Sum Contracts

(A) Comparison of Bids: Bids on Lump Sum Contracts will be compared on the basis of the lump sum price bid, adjusted for alternate prices bid, if any.

(B) Lump Sum Bids for "General Construction Work" which include excavation shall include all necessary excavation work defined in the Specifications as being included in the lump sum bid. The bidder shall also bid a unit price for the additional cost of excavating material which is defined in the Specifications as excavation for which additional payment will be made. The total estimated additional cost of removing such material will be taken as the quantity set forth in the Engineer's Estimate multiplied by the unit price bid. This total estimated cost of additional excavation shall be added to the lump sum bid for the General Construction Work for the purpose of comparing bids to determine the low bidder.

(C) Variations from Engineer's Estimate: The Engineer's Estimate of the quantity of excavation for which additional payment will be made is approximate only and is given solely to be used as a uniform basis for the comparison of bids and such estimate is not to be considered as part of this contract. The quantities actually required to complete the contract work may be more or less than the quantities in the Engineer's Estimate and, if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

33. Unit Price Contracts

(A) Comparison of Bids: Bids on Unit Price Contracts will be compared on the basis of a total estimated price, arrived at by taking the sum of the estimated quantities of such items, in accordance with the Engineer's Estimate of Quantities set forth in the Bid Form, multiplied by the corresponding unit prices, and including any lump sum bids on individual items.

(B) Variations from Engineer's Estimate: Bidders are warned that the Engineer's Estimate of Quantities on the various items of work and materials is approximate only, given solely to be used as a uniform basis for the comparison of bids, and is not be considered part of this contract. The quantities actually required to complete the contract work may be less or more than so estimated, and if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

(C) Overruns: The terms and conditions applicable to overruns of unit price items are set forth in Article 26 of the Contract.

34. Excise Tax

Bidders are referred to the Specifications for information on Federal Excise Tax exemptions.

35. Licenses and Permits

The successful bidder will be required to obtain all necessary licenses and permits necessary to perform the work.

36. Multiple Prime Contractors

If more than one prime contractor will be involved on this project, all contractors are required to examine the Invitation for Bid packages for all other parts of the project.

37. Locally Based Enterprise Requirements (LBE)

This Contract is subject to the requirements of Administrative Code, Section 6-108.1, and the regulations promulgated thereunder. No construction contract will be awarded unless and until these requirements have been complied with in their entirety. The bidder is advised of the provisions set forth below, as well as the provisions with respect to the Locally Based Enterprise Program contained in Article 67 of the Contract. The contractor is advised that:

(A) If any portion of the Contract is subcontracted, not less than ten percent of the total dollar amount of the contract shall be awarded to locally based enterprises ("LBEs"); except, where less than ten percent of the total dollar amount of the Contract is subcontracted, such lesser percentage shall be so awarded.

(B) No contractor shall require performance and payment bonds from LBE subcontractors.

(C) No Contract shall be awarded unless the contractor first identifies in its bid:

- (1) the percentage, dollar amount and type of work to be subcontracted; and
- (2) the percentage, dollar amount and type of work to be subcontracted to LBEs.

(D) Within ten calendar days after notification of low bid, the apparent low bidder shall submit an "LBE Participation Schedule" to the contracting agency. If such schedule does not identify sufficient LBE subcontractors to meet the requirements of Administrative Code Section 6-108.1, the apparent low bidder shall submit documentation of its good faith efforts to meet such requirements.

(1) The "LBE Participation Schedule" shall include:

- (a) the name and address of each LBE that will be given a subcontract,
- (b) the percentage, dollar amount and type of work to be subcontracted to the LBE, and
- (c) the dates when the LBE subcontract work will commence and end.



- (2) The following documents shall be attached to the "LBE Participation Schedule":
- (a) verification letters from each subcontractor listed in the "LBE Participation Schedule" stating that the LBE will enter into a formal agreement for work,
  - (b) certification documents of any proposed LBE subcontractor which is not on the LBE certified list, and
  - (c) copies of the certification letter of any proposed subcontractor which is an LBE.
- (3) Documentation of good faith efforts to achieve the required LBE percentage shall include as appropriate but not limited to the following:
- (a) attendance at prebid meetings, when scheduled by the agency, to advise bidders of contract requirements;
  - (b) advertisement where appropriate in general circulation media, trade association publications and small business media of the specific subcontracts that would be at least equal to the percentage goal for LBE utilization specified by the contractor;
  - (c) written notification to association of small, minority and women contractors soliciting specific subcontractors;
  - (d) written notification by certified mail to LBE firms that their interest in the contract is solicited for specific work items and their estimated values;
  - (e) demonstration of efforts made to select portions of the work for performance by LBE firms in order to increase the likelihood of achieving the stated goal;
  - (f) documented efforts to negotiate with LBE firms for specific subcontracts, including at a minimum:
    - (i) The names, address and telephone numbers of LBE firms that are contacted;
    - (ii) A description of the information provided to LBE firms regarding the plans and specifications for portions of the work to be performed;
    - (iii) Documentation showing that no reasonable price can be obtained from LBE firms;
    - (iv) A statement of why agreements with LBE firms were not reached;
  - (g) a statement of the reason for rejecting any LBE firm which the contractor deemed to be unqualified; and
  - (h) documentation of efforts made to assist the LBE firms contacted that needed assistance in obtaining required insurance.

(E) Unless otherwise waived by the Commissioner with the approval of the Office of Economic and Financial Opportunity, failure of a proposed contractor to provide the information required by paragraphs (C) and (D) above may render the bid non-responsive and the Contract may not be awarded to the bidder. If the contractor states that it will subcontract a specific portion of the work, but can demonstrate despite good faith efforts it cannot achieve its required LBE percentage for subcontracted work until after award of Contract, the Contract may be awarded, subject to a letter of compliance from the contractor stating that it will comply with Administrative Code Section 6-108.1 and subject to approval by the Commissioner. If the contractor has not met its required LBE percentage prior to award, the contractor shall demonstrate that a good faith effort has been made subsequent to award to obtain LBEs on each subcontract until it meets the required percentage.

(F) When a bidder indicates prior to award that no work will be subcontracted, no work may be subcontracted without the prior written approval of the Commissioner, which shall be granted only if the contractor in good faith seeks LBE subcontractors at least six weeks prior to the start of work.

(G) The contractor may not substitute or change any LBE which was identified prior to award of the contract without the written permission of the Commissioner. The contractor shall make a written application to the Commissioner for permission to make such substitution or change, explaining why the contractor needs to change its LBE subcontractor and how the contractor will meet its LBE subcontracting requirement. Copies of such application must be served on the originally identified LBE by certified mail return receipt requested, as well as the proposed substitute LBE. The Commissioner shall determine whether or not to grant the contractor's request for substitution.

38. Bid Submission Requirements

The Bid Submission Requirements are set forth on page 2 of the Bid Booklet.

39. Comptroller's Certificate

This Contract shall not be binding or of any force unless it is registered by the Comptroller in accordance with Section 328 of the City Charter and the Procurement Policy Board Rules. This Contract shall continue in force only after annual appropriation of funds by the City of New York and certification as hereinabove set forth.

40. Procurement Policy Board Rules

This Invitation For Bids is subject to the Rules of the Procurement Policy Board of the City of New York. In the event of a conflict between said Rules and a provision of this Invitation For Bids, the Rules shall take precedence.

41. DDC Safety Requirements

The DDC Safety Requirements apply to the work to be performed pursuant to the Contract. The DDC Safety Requirements are set forth on the following pages.

**CITY OF NEW YORK**  
**DEPARTMENT OF DESIGN AND CONSTRUCTION**  
**SAFETY REQUIREMENTS**

---

**THE DDC SAFETY REQUIREMENTS INCLUDE THE FOLLOWING SECTIONS:**

- I. POLICY ON SITE SAFETY**
- II. PURPOSE**
- III. DEFINITIONS**
- IV. RESPONSIBILITIES**
- V. SAFETY QUESTIONNAIRE**
- VI. SAFETY PROGRAM AND SITE SAFETY PLAN**
- VII. KICK-OFF/PRE-CONSTRUCTION MEETINGS AND SAFETY REVIEW**
- VIII. EVALUATION DURING WORK IN PROGRESS**
- IX. SAFETY PERFORMANCE EVALUATION**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## I. POLICY ON SITE SAFETY

The City of New York Department of Design and Construction (DDC) is committed to a policy of injury and illness prevention and risk management for construction work that will ensure the safety and health of the workers engaged in the projects and the protection of the general public. Therefore, it is DDC's policy that work carried out by Contractors on DDC jobsites must, at a minimum, comply with applicable federal, state and city laws, rules and regulations, including without limitation:

- ❑ U. S. Department of Labor 29 Code of Federal Regulations (CFR) Part 1926 and applicable Sub-parts of Part 1910 – U.S. Occupational Safety and Health Administration (OSHA) including, but not limited to “Respiratory Protection” (29 CFR 1910.134), “Permit-Required Confined Spaces” (29 CFR 1910.146), and “Hazard Communication” (29 CFR 1910.1200);
- ❑ New York State Department of Labor Industrial Code Rule 23 – Protection in Construction, Demolition and Excavation;
- ❑ New York City Construction Codes, Title 28
- ❑ NYC Department of Transportation Title 34 Chapter 2 – Highway Rules
- ❑ New York State Department of Labor Industrial Code Rule 753
- ❑ NYC Local Law No. 113 (2005) Noise Control Code

In addition, all regulations promulgated by the NYC Department of Transportation, including requirements for Maintenance and Protection of Traffic (MPT), are applicable when contained in contract specifications. While MPT is a significant component of work in our Infrastructure Division, it does not supersede or exempt Contractors from complying with other applicable health and safety standards (for example, excavating and trenching standards, operation of heavy equipment and compliance with City environmental and noise regulations).

## I. PURPOSE

The purpose of this policy is to ensure that Contractors perform their work and supervise their employees in accordance with all applicable federal, state and city rules and regulations. Further, Contractors will be expected to minimize or eliminate jobsite and public hazard, through a planning, inspection, auditing and corrective action process. The goal is to control risks so that injuries, illnesses and accidents to contractors' employees, DDC employees and the general public, as well as damage to city-owned and private property, are reduced to the lowest level feasible.

## III. DEFINITIONS

**Agency Chief Contracting Officer (ACCO):** The ACCO shall mean the person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO.

**Competent Person:** As defined by OSHA, an individual who is capable of identifying existing and predictable hazards in the surroundings or working conditions that are unsanitary, hazardous, or dangerous to employees or the general public, and who has authorization to take prompt corrective measures to eliminate them.

**Construction Safety Auditor:** A representative of the QACS Construction Safety Unit who provides inspection and assessment services to enhance health and safety on all DDC construction projects. The activities of the Construction Safety Auditor include performing site surveys, reviewing health and safety plans, reviewing construction permits, and rendering technical advice and assistance to DDC Resident Engineers and Project Managers.

**Construction Safety Unit:** A part of QACS within the Division of Technical Support that assesses contractor safety on DDC jobsites and advises responsible parties of needed corrective actions.

**Construction Superintendent:** A representative of the contractor responsible for overseeing performance of the required construction work. This individual must engage in sound construction practices, and is responsible to maintain a safe work site. In the case of a project involving the demolition, alteration or new construction of buildings, the Construction Superintendent must be licensed by the NYC Department of Buildings.

**Contractor:** For purposes of these Safety Requirements, the term "Contractor" shall mean any person or entity that enters into a contract for the performance of construction work on a DDC project. The term "Contractor" shall include any person or entity which enters into any of the following types of contracts: (1) a prime construction contract for a specific project, (2) a prime construction contract using the Job Order Contracting System ("JOCS Contract"), and (3) a subcontract with a CM/Builder ("First Tier Subcontract").

**Director - Quality Assurance and Construction Safety (QACS):** Responsible for the operations of the QACS Construction Safety Unit and the DDC Site Safety management programs.

**Job Hazard Assessment (JHA):** A process of identifying site-specific hazards that may be present during construction and establishing the means and methods to reduce or eliminate those hazards.

**Jobsite Safety Coordinator:** A person designated by the Contractor to be onsite during all activities. This individual shall have received, at a minimum, the OSHA 10-hour construction safety program. Other examples of acceptable training are the 30-hour OSHA Safety and Health Standards for the Construction Industry training program (OSHA 510) or a degree/certificate in a safety and health from a college-level curriculum. This person does not necessarily have to be dedicated full-time to site safety, but must have sufficient experience and authority to undertake corrective action and must qualify to be a competent person. For certain projects, as defined in NYC Construction Codes – Title 28, this person may be required to have a Site Safety Manager's License issued by the NYC DOB.

**Qualified Person:** As defined by OSHA, an individual who, by possession of a recognized degree, certificate, license or professional standing, or who by extensive knowledge, training, and experience, has successfully demonstrated his or her ability to solve problems relating to the subject matter, the work, or the project. Qualified Persons are required under regulation to address issues pertaining, but without limit, to fall protection, scaffold design and trenching and shoring, among others.

**Resident Engineer (RE) / Construction Project Manager (CPM):** Representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the work. (The RE/CPM may be a third-party consultant, including a CM, retained by DDC.)

**Safety Program:** Established by the Contractor that covers all operations of that Contractor and establishes the Contractor's overall safety policy, regulatory compliance plan and minimum safety standards. The Safety Program must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

**Safety Questionnaire:** Used by DDC to evaluate Contractor's current and past safety performance. It is required to be completed by all Contractors initially when submitting bids for Construction work, or when being pre-qualified and updated annually or as requested by the DDC.

**Site Safety Plan:** A site-specific safety plan developed by the Contractor for a specific project. The Site Safety Plan must identify hazards associated with the project, and include specific safety precautions and training appropriate and necessary to complete the work. The Site Safety Plan must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

**Unsafe or Unhealthy Condition:** A condition that could be potentially hazardous to the health and safety of personnel or the public, and/or damaging to equipment, machinery, property or the environment.

**Weekly Safety Meetings:** Weekly documented jobsite safety meetings, given to all jobsite personnel by contractor, with the purpose of discussing general safety topics and job specific requirements encountered at the DDC work site.

#### **IV. RESPONSIBILITIES**

All persons who manage, perform, and provide support for construction projects shall conduct operations in compliance with the requirements identified in this Policy and all applicable governing regulatory agency requirements and guidelines pertaining to safety in construction.

##### **A. Resident Engineer / Construction Project Manager / Construction Manager**

- Monitors the issuance of safety- related permits, approvals and drawings and maintains copies on site.
- Monitors construction-related work activities to confirm that they are conducted in accordance with DDC policies and all applicable regulations that pertain to construction safety.
- Maintains documentation and periodically attends weekly safety meeting.
- Notifies the Construction Safety Unit and the ACCO's Insurance and Risk Management Unit of project- related accidents and emergencies, as per DDC's Construction Safety Emergency Protocol.
- Gathers facts related to all accidents and prepares DDC Accident Reports.
- Notifies the Construction Safety Unit of outside regulatory agency inspections and forwards a copy of the inspection report within three days of its receipt.
- Monitors the conditions at the site for conformance with the Site Safety Plan and DDC construction documents.
- Notifies the contractor and DDC in the event that any condition or activity exists that is not in compliance with the Site Safety Plan, applicable federal, state or local codes or any condition that presents a potential risk of injury to the public or workers or possible damage to property.
- Notifies DDC of any emergency condition and directs the contractor to provide such labor, materials, equipment and supervision to abate such conditions.
- Reports gross safety violations to the Construction Safety Unit immediately.

##### **A. Contractors**

- Complete a Safety Questionnaire and submit with its bid or as part of a pre-qualification package.
- Provide a Written Job Hazard Assessment (JHA) that identifies expected safety issues of the work to be performed. JHA shall be included with the Site Safety Plan submitted by the contractor.
- Submit a Site Safety Plan and Safety Program within 15 days of issuance of the Notice to Proceed, or as otherwise directed. The Site Safety Plan and Safety Program are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. The Site Safety Plan shall be revised and updated as necessary.
- Ensure that all employees are aware of the hazards associated with the project through formal and informal training and/or other communications. Conduct and document weekly safety meetings for the duration of the project. Documentation to be provided to the RE/CPM/CM on a monthly basis.
- Name a Construction Superintendent, if required.
- Name a Job Site Safety Coordinator. The Contractor will be required to identify the Job Site Safety Coordinator in the Site Safety Plan.
- Comply with all mandated federal, state and local safety and health rules and regulations.
- Comply with all provisions of the Site Safety Plan.
- As part of the Site Safety Plan, prepare a site specific MPT (if not otherwise provided in the contract documents) and comply with all of its provisions.
- Conduct and document site-specific safety orientation for Contractor personnel to review the hazards associated with the project as identified in the Site Safety Plan and the specific safety procedures and controls that will be used to protect workers, the general public and property. The Job Site Safety Coordinator will conduct this training prior to mobilization and provide documentation to the RE/CPM/CM.
- Provide, replace and adequately maintain at or around the project site, suitable and sufficient signage, lights, barricades and enclosures (fences, sidewalk sheds, netting, bracing, etc.).
- Report unsafe conditions or hazards to the DDC RE/CPM/CM as soon as practical, but no more than 24 hours after discovery, and take action to remove or abate such conditions.

- Report any accident involving injuries to workers or the general public, as well as property damage, to the DDC RE/CPM/CM within two (2) hours.
- Notify the DDC RE/CPM/CM within two (2) hours of the start of an inspection by any regulatory agency personnel, including OSHA.
- Maintain all records pertaining to all required compliance documents and accident and injury reports.
- Respond to DDC recommendations on safety, which shall in no way relieve the Contractor of its responsibilities for safety on the project. The Contractor has sole responsibility for safety.

## V. SAFETY QUESTIONNAIRE

DDC requires that all Contractors provide information regarding their current and past safety and environmental performance and programs. This will be accomplished by the use of the DDC Safety Questionnaire. As a part of the bid submittal package, the contractor must submit a completed DDC Safety Questionnaire listing their workers' compensation experience modification rating and OSHA Incidence Rates for the three (3) years prior to the date of the bid opening. DDC may request a Contractor to update its Questionnaire at any time or to provide more detailed information. The Contractor must provide the requested update within 30 days.

The following criteria will be used by DDC in reviewing the Contractor's responsibility, which will be based on the information provided on the questionnaire:

- Criteria 1: OSHA Injury and Illness Rates (I&IR) are no greater than the average for the industry (based on the most current Bureau of Labor Statistics data for the Contractors SIC code); and
- Criteria 2: Insurance workers compensation Experience Modification Rate (EMR) equal to or less than 1.0; and
- Criteria 3: Any willful violations issued by OSHA or NYC DOB within the last three years; and
- Criteria 4: A fatality (worker or member of public) experienced on or near Contractor's worksite within the last three (3) years; and
- Criteria 5: An unacceptable rating by QACS based on past performance on DDC projects; and
- Criteria 6: Contractor has in place an acceptable corporate safety program and its employees shall have completed all documented relative safety training; and
- Criteria 7: Contractor shall provide OSHA Injury Records (currently OSHA 300 Log) for the last three (3) years.

If the Contractor fails to meet the basic criteria listed above, the Construction Safety Unit may request, through the ACCO, more detail concerning the Contractor's safety experience. DDC may request the Contractor to provide copies of, among other things, OSHA records, OSHA and DOB citations, EPA citations and written Safety Programs.

## VI. SAFETY PROGRAM AND SITE SAFETY PLAN

Within fifteen (15) days of issuance of the Notice to Proceed, or as otherwise directed, the Contractor shall submit the following: (1) Safety Program, and (2) Site Safety Plan. The Safety Program shall set forth the Contractor's overall safety policy, regulatory compliance plan and minimum safety standard, and the Site Safety Plan shall identify hazards associated with the project, and include specific safety precautions and training appropriate and necessary to complete the work. The Safety Program and the Site Safety Plan are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. Failure by the contractor to submit an acceptable Site Safety Plan and Safety Program shall be grounds for default.

The Site Safety Plan shall apply to all Contractor and subcontractor operations, and shall have at a minimum, the following elements. Each element shall be described in a separate section in the written document. It may be necessary to modify the basic format for certain unique or high-risk projects (such as tunnels or high-rise construction). The basic elements are as follows:



1. **Responsibility and Organization:** Identify the person or persons with authority and responsibility for implementing the Site Safety Plan. Provide an organization chart and define levels of authority and responsibility. Identify the Competent Person, the Construction Superintendent (if required), the Job Safety Coordinator and the Qualified Person required for this project.
2. **Communication:** Establish a system for communicating with employees and subcontractors on matters relating to worker and public safety and health and environmental protection, including provisions designed to encourage employees to inform the employer of hazards at the worksite without fear of reprisal. An emergency response notification protocol is to be established that also includes after hours contact numbers. The plan must also include provisions for weekly safety meetings held by the Job Site Safety Coordinator.
3. **Job Hazard Assessment:** A written document submitted by the contractor, used to identify expected job hazards and public safety risks and state the specific means and methods to reduce, control or eliminate those hazards. This part of the Site Safety Plan must also include how on-going evaluations of those risks and hazards will be carried out, including plans for periodic inspections to identify unsafe conditions, work practices and public safety hazards.
4. **Accident/Exposure Investigation:** Establish a procedure to investigate and report occupational and public injury or illness, property damage, vehicle accidents or other mishaps.
5. **Hazard Correction:** Establish means, methods and/or procedures for correcting unsafe or unhealthy conditions that might be exposing both the public and workers to hazards. Corrective actions must be taken immediately when observed or discovered. Should an imminent hazard exist which cannot be immediately abated without endangering employees, the public and/or property, remove or restrict all exposed persons from the area except those necessary to correct the existing condition. Employees necessary to correct the hazardous condition shall be provided the necessary safeguards. When corrective actions cannot be taken immediately, temporary measures should be taken until such time permanent measures are taken to eliminate the potential risks or hazards
6. **Training:** Describe site-specific hazard training programs. In addition to the required safety orientation, additional site specific training, in the form of required weekly safety meetings, will be required. Contractors must also initiate training when: a) new employees are hired; b) employees are given new job assignments for which training has not been previously received; c) new substances, processes, procedures or equipment are introduced that might represent a new public or worker hazard; d) the employee is made aware of a new or previously unrecognized hazard; e) new supervisors are assigned to familiarize themselves with the safety and health hazards to which employees under their immediate direction and control may be exposed; and f) after a jobsite incident or accident has occurred.
7. **Recordkeeping:** Establish procedures to maintain records of scheduled and periodic inspections, weekly safety meetings, and training records. Updated records shall be maintained at the jobsite, accessible to the Construction Safety Auditors and/or Quality Assurance Auditors/RE/CPM, and retained in accordance with DDC policy.

The most critical component of the Site Safety Plan is the Job Hazard Assessment section. This section must address specific hazards that are anticipated throughout the project. Each Site Safety Plan must address, at a minimum:

- Public and pedestrian safety
- Fall protection
- Electrical hazards
- Scaffolding
- Fire protection
- Emergency notification & response
- Housekeeping / debris removal
- Dust control
- Maintenance and protection of traffic
- Trenching and excavating
- Heavy equipment operations
- Material / equipment storage
- Environmental contamination
- Sheeting and shoring
- Alcohol and Drug Abuse Policy

The following additional hazards must be addressed, if applicable, based on the contract safety specifications and/or the results of the JHA (the list is not all-inclusive):

- Basic Personal Protective Equipment
- Compressed Air
- Compressed Gas Cylinders
- Cranes, Derricks and Hoists
- Demolition
- Electrical safety
- Excavations and Trenching
- Fall Protection – Floor openings/Stairways
- Fall Protection – Guardrails Toe boards etc
- Fall Protection – Leading Edge
- Fall Protection – Personal Fall Protection Devices
- Fire Protection and Fire Prevention
- Hazard Communication (RIGHT TO KNOW)
- Hazardous Energy & Lock Out / Tag Out
- Housekeeping/ Sanitation
- Maintenance and Protection of Traffic (MPT)
- Man Lifts /Aerial Lifts
- Marine Operations
- Motor Vehicle Safety
- Overhead Power lines
- Permit Required Confined Space
- Portable Ladders
- Powered Actuated Tools
- Powered Material Handling Equipment
- Scaffolds – Mobile
- Scaffolds – Stationary
- Scaffolds – Suspended
- Slings
- Steel Erection
- Welding and Cutting (Hot Work)
- Airborne Contaminants – Particulates – General
- Asbestos
- Blood borne Pathogens
- Hearing Protection
- Lead in Construction
- Mercury in Construction
- PCB's
- Respiratory Protection
- Silica
- Thermal Stress
- West Nile Virus
- Rodents and Vermin
- Noise Mitigation Plan

Certain DDC programs, such as Job Order Contracting System (JOCS), may not necessarily require Site Safety Plans. The JOCS contractor will be required to submit a Safety Program. In addition, certain DDC Operating Units may establish program or client-specific safety requirements. The contractor's Site Safety Plan must address such program or client specific safety requirements.

## **VII. KICK-OFF MEETINGS/PRE-CONSTRUCTION AND SAFETY REVIEW**

As part of the construction kick-off meeting, a Site Safety Plan review will be part of the agenda. A QACS representative will participate in this meeting with the contractor prior to the start of the project for the purpose of:

- A. Reviewing the safety issues detailed in the contract.
- B. Reviewing the Site Safety Plan.
- C. Reviewing any new issues or information that was not previously addressed.
- D. Discussing planned inspections and audits of the site by DDC personnel.

## **VIII. EVALUATION DURING WORK IN PROGRESS**

The Contractor's adherence to these Safety Requirements will be monitored throughout the project. This will be accomplished by the following:

- A. Use of a safety checklist by a representative of the Construction Safety Unit or other designated DDC representative or Consultant during regular, unannounced inspections of the job site. Field Exit Conferences will be held with the RE/CPM, Contractor Superintendents or Safety Representatives.
- B. The RE/CPM will continually monitor the safety and environmental performance of the contractor's employees and work methods. Deficiencies shall be brought to the attention of the contractor's representative on site for immediate correction. The DDC representative will maintain a written record of these deficiencies and forward them to the Construction Safety Unit on a weekly basis. Any critical deficiencies shall be immediately reported to QACS phone# (718) 391-1624 or (718) 391-1911.
- C. If the Contractor's safety performance during the project is not up to DDC standards (safety performance measure, accident/incident rate, etc.) the Director- QACS, or designee will meet with the Contractor's safety representative, the DDC project manager, the RE/CPM, or the DDC Environmental Specialist (if environmental issues are involved ). The purpose of this meeting is to 1) determine the level of non-compliance; 2) explain and clarify the safety/environmental provisions; 3) agree on a future course of action to correct the deficiencies.
- D. If the deficiencies continue to occur with inadequate attention by the contractor, this shall, among other remedies available, be grounds for default.
- E. The contractor shall inform the Construction Safety Unit and ACCO Insurance and Risk Management Unit of all medical injuries or illnesses that require doctors' treatment resulting from an on-the-job incident within 24 hours of the occurrence. The Construction Safety Unit shall also be immediately informed of all fatalities, catastrophic accidents with more than one employee hospitalized, any injuries to members of the general public and major equipment damage (e.g., property damage, equipment rollovers, loads dropped from crane). QACS shall maintain a record of all contractor injuries and illnesses during the project and provide regular reports to the Agency.
- F. The Construction Safety Unit shall be immediately notified at the start of any NYS-DOL/ NYC-COSH/ OSHA/ EPA inspections. The Director of Quality Assurance & Construction Safety shall maintain a log of all contractor OSHA/EPA inspections and citations during the project.

## **IX. SAFETY PERFORMANCE EVALUATION**

The contractor's safety record, including all DDC inspection results, will be considered as part of the Contractor's performance evaluation at the conclusion of the project. Poor safety performance during the course of the project shall be a reason to rate a Contractor unsatisfactory which will be reflected in the City's Vendex system and will be considered for future procurement actions as set forth in the City's Procurement Policy Board Rules.

**THIS PAGE INTENTIONALLY LEFT BLANK**

**CITY OF NEW YORK**  
**STANDARD CONSTRUCTION CONTRACT**

**December 2013**



*CITY OF NEW YORK*  
*STANDARD CONSTRUCTION CONTRACT*

*TABLE OF CONTENTS*

**CHAPTER I**  
**THE CONTRACT AND DEFINITIONS**

<b>ARTICLE 1.</b>	<b>THE CONTRACT</b>	<b>1</b>
<b>ARTICLE 2.</b>	<b>DEFINITIONS</b>	<b>1</b>

**CHAPTER II**  
**THE WORK AND ITS PERFORMANCE**

<b>ARTICLE 3.</b>	<b>CHARACTER OF THE WORK</b>	<b>4</b>
<b>ARTICLE 4.</b>	<b>MEANS AND METHODS OF CONSTRUCTION</b>	<b>4</b>
<b>ARTICLE 5.</b>	<b>COMPLIANCE WITH LAWS</b>	<b>5</b>
<b>ARTICLE 6.</b>	<b>INSPECTION</b>	<b>10</b>
<b>ARTICLE 7.</b>	<b>PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION</b>	<b>11</b>

**CHAPTER III**  
**TIME PROVISIONS**

<b>ARTICLE 8.</b>	<b>COMMENCEMENT AND PROSECUTION OF THE WORK</b>	<b>12</b>
<b>ARTICLE 9.</b>	<b>PROGRESS SCHEDULES</b>	<b>12</b>
<b>ARTICLE 10.</b>	<b>REQUESTS FOR INFORMATION OR APPROVAL</b>	<b>13</b>
<b>ARTICLE 11.</b>	<b>NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY</b>	<b>13</b>
<b>ARTICLE 12.</b>	<b>COORDINATION WITH OTHER CONTRACTORS</b>	<b>17</b>
<b>ARTICLE 13.</b>	<b>EXTENSION OF TIME FOR PERFORMANCE</b>	<b>18</b>
<b>ARTICLE 14.</b>	<b>COMPLETION AND FINAL ACCEPTANCE OF THE WORK</b>	<b>21</b>
<b>ARTICLE 15.</b>	<b>LIQUIDATED DAMAGES</b>	<b>22</b>
<b>ARTICLE 16.</b>	<b>OCCUPATION OR USE PRIOR TO COMPLETION</b>	<b>22</b>

**CHAPTER IV**  
**SUBCONTRACTS AND ASSIGNMENTS**

<b>ARTICLE 17.</b>	<b>SUBCONTRACTS</b>	<b>23</b>
<b>ARTICLE 18.</b>	<b>ASSIGNMENTS</b>	<b>25</b>

*CITY OF NEW YORK*  
*STANDARD CONSTRUCTION CONTRACT*

*TABLE OF CONTENTS*

**CHAPTER V**  
**CONTRACTOR'S SECURITY AND GUARANTY**

ARTICLE 19.	SECURITY DEPOSIT	26
ARTICLE 20.	PAYMENT GUARANTEE	26
ARTICLE 21.	RETAINED PERCENTAGE	29
ARTICLE 22.	INSURANCE	29
ARTICLE 23.	MONEY RETAINED AGAINST CLAIMS	35
ARTICLE 24.	MAINTENANCE AND GUARANTY	36

**CHAPTER VI**  
**CHANGES, EXTRA WORK AND DOCUMENTATION OF CLAIM**

ARTICLE 25.	CHANGES	37
ARTICLE 26.	METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK	37
ARTICLE 27.	RESOLUTION OF DISPUTES	40
ARTICLE 28.	RECORD KEEPING FOR EXTRA OR DISPUTED WORK	44
ARTICLE 29.	OMITTED WORK	45
ARTICLE 30.	NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS	45

**CHAPTER VII**  
**POWERS OF THE RESIDENT ENGINEER, THE ENGINEER  
OR ARCHITECT AND THE COMMISSIONER**

ARTICLE 31.	THE RESIDENT ENGINEER	46
ARTICLE 32.	THE ENGINEER OR ARCHITECT OR PROJECT MANAGER	47
ARTICLE 33.	THE COMMISSIONER	47
ARTICLE 34.	NO ESTOPPEL	48

**CHAPTER VIII**  
**LABOR PROVISIONS**

ARTICLE 35.	EMPLOYEES	48
ARTICLE 36.	NO DISCRIMINATION	50
ARTICLE 37.	LABOR LAW REQUIREMENTS	52
ARTICLE 38.	PAYROLL REPORTS	57
ARTICLE 39.	DUST HAZARDS	58



**CITY OF NEW YORK  
STANDARD CONSTRUCTION CONTRACT**

**TABLE OF CONTENTS**

**CHAPTER IX**

**PARTIAL AND FINAL PAYMENTS**

ARTICLE 40.	CONTRACT PRICE	58
ARTICLE 41.	BID BREAKDOWN ON LUMP SUM	58
ARTICLE 42.	PARTIAL PAYMENTS	58
ARTICLE 43.	PROMPT PAYMENT	59
ARTICLE 44.	SUBSTANTIAL COMPLETION PAYMENT	59
ARTICLE 45.	FINAL PAYMENT	60
ARTICLE 46.	ACCEPTANCE OF FINAL PAYMENT	61
ARTICLE 47.	APPROVAL BY PUBLIC DESIGN COMMISSION	62

**CHAPTER X**

**CONTRACTOR'S DEFAULT**

ARTICLE 48.	COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT	62
ARTICLE 49.	EXERCISE OF THE RIGHT TO DECLARE DEFAULT	64
ARTICLE 50.	QUITTING THE SITE	64
ARTICLE 51.	COMPLETION OF THE WORK	64
ARTICLE 52.	PARTIAL DEFAULT	64
ARTICLE 53.	PERFORMANCE OF UNCOMPLETED WORK	65
ARTICLE 54.	OTHER REMEDIES	65

**CHAPTER XI**

**MISCELLANEOUS PROVISIONS**

ARTICLE 55.	CONTRACTOR'S WARRANTIES	66
ARTICLE 56.	CLAIMS AND ACTIONS THEREON	66
ARTICLE 57.	INFRINGEMENT	66
ARTICLE 58.	NO CLAIM AGAINST OFFICERS, AGENTS OR EMPLOYEES	67
ARTICLE 59.	SERVICES OF NOTICES	67
ARTICLE 60.	UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT	67
ARTICLE 61.	ALL LEGAL PROVISIONS DEEMED INCLUDED	67
ARTICLE 62.	TAX EXEMPTION	67
ARTICLE 63.	INVESTIGATION(S) CLAUSE	69
ARTICLE 64.	TERMINATION BY THE CITY	71
ARTICLE 65.	CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE	73

*CITY OF NEW YORK*  
*STANDARD CONSTRUCTION CONTRACT*

*TABLE OF CONTENTS*

**CHAPTER XI (CONT'D)**

**MISCELLANEOUS PROVISIONS**

<b>ARTICLE 66.</b>	<b>PARTICIPATION IN AN INTERNATIONAL BOYCOTT</b>	<b>74</b>
<b>ARTICLE 67.</b>	<b>LOCALLY BASED ENTERPRISE PROGRAM</b>	<b>74</b>
<b>ARTICLE 68.</b>	<b>ANTITRUST</b>	<b>75</b>
<b>ARTICLE 69.</b>	<b>MACBRIDE PRINCIPLES PROVISIONS</b>	<b>75</b>
<b>ARTICLE 70.</b>	<b>ELECTRONIC FILING/NYC DEVELOPMENT HUB</b>	<b>77</b>
<b>ARTICLE 71.</b>	<b>PROHIBITION OF TROPICAL HARDWOODS</b>	<b>77</b>
<b>ARTICLE 72.</b>	<b>CONFLICTS OF INTEREST</b>	<b>78</b>
<b>ARTICLE 73.</b>	<b>MERGER CLAUSE</b>	<b>78</b>
<b>ARTICLE 74.</b>	<b>STATEMENT OF WORK</b>	<b>78</b>
<b>ARTICLE 75.</b>	<b>COMPENSATION TO BE PAID TO CONTRACTOR</b>	<b>78</b>
<b>ARTICLE 76.</b>	<b>ELECTRONIC FUNDS TRANSFER</b>	<b>78</b>
<b>ARTICLE 77.</b>	<b>RECORDS RETENTION</b>	<b>79</b>
<b>ARTICLE 78.</b>	<b>PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED ENTERPRISES IN CITY PROCUREMENT</b>	<b>79</b>
<b>SIGNATURES</b>		<b>85</b>
<b>ACKNOWLEDGMENT BY CORPORATION</b>		<b>86</b>
<b>ACKNOWLEDGMENT BY PARTNERSHIP</b>		<b>86</b>
<b>ACKNOWLEDGMENT BY INDIVIDUAL</b>		<b>86</b>
<b>ACKNOWLEDGMENT BY COMMISSIONER</b>		<b>87</b>
<b>AUTHORITY</b>		<b>88</b>
<b>COMPTROLLER'S CERTIFICATE</b>		<b>88</b>
<b>MAYOR'S CERTIFICATE</b>		<b>89</b>
<b>PERFORMANCE BOND #1</b>		<b>90</b>
<b>PERFORMANCE BOND #2</b>		<b>94</b>
<b>PAYMENT BOND</b>		<b>98</b>

WITNESSETH:

The parties, in consideration of the mutual agreements contained herein, agree as follows:

CHAPTER I  
THE CONTRACT AND DEFINITIONS

ARTICLE 1. THE CONTRACT

1.1 Except for titles, subtitles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience), the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of this Contract:

1.1.1 All provisions required by law to be inserted in this Contract, whether actually inserted or not;

1.1.2 The Contract Drawings and Specifications;

1.1.3 The General Conditions and Special Conditions, if any;

1.1.4 The Contract;

1.1.5 The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet;

1.1.6 All Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed or the Order to Work.

1.2 Should any conflict occur in or between the Drawings and Specifications, the Contractor shall be deemed to have estimated the most expensive way of doing the Work, unless the Contractor shall have asked for and obtained a decision in writing from the Commissioner of the Agency that is entering into this Contract, before the submission of its bid, as to what shall govern.

ARTICLE 2. DEFINITIONS

2.1 The following words and expressions, or pronouns used in their stead, shall, wherever they appear in this Contract, be construed as follows, unless a different meaning is clear from the context:

2.1.1 "Addendum" or "Addenda" shall mean the additional Contract provisions and/or technical clarifications issued in writing by the Commissioner prior to the receipt of bids.

2.1.2 "Agency" shall mean a city, county, borough or other office, position, department, division, bureau, board or commission, or a corporation, institution or agency of government, the expenses of which are paid in whole or in part from the City treasury.

2.1.3 "Agency Chief Contracting Officer" (ACCO) shall mean a person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO, or his/her duly authorized representative.

2.1.4 "**Allowance**" shall mean a sum of money which the Agency may include in the total amount of the Contract for such specific contingencies as the Agency believes may be necessary to complete the Work, e.g., lead or asbestos remediation, and for which the Contractor will be paid on the basis of stipulated unit prices or a formula set forth in the Contract or negotiated between the parties provided, however, that if the Contractor is not directed to use the Allowance, the Contractor shall have no right to such money and it shall be deducted from the total amount of the Contract.

2.1.5 "**City**" shall mean the City of New York.

2.1.6 "**City Chief Procurement Officer**" (CCPO) shall mean a person delegated authority by the Mayor to coordinate and oversee the procurement activity of Mayoral agency staff, including the ACCO and any offices which have oversight responsibility for the procurement of construction, or his/her duly authorized representative.

2.1.7 "**Commissioner**" shall mean the head of the Agency that has entered into this Contract, or his/her duly authorized representative.

2.1.8 "**Comptroller**" shall mean the Comptroller of the City of New York.

2.1.9 "**Contract**" or "**Contract Documents**" shall mean each of the various parts of the contract referred to in Article 1 hereof, both as a whole and severally.

2.1.10 "**Contract Drawings**" shall mean only those drawings specifically entitled as such and listed in the Specifications or in any Addendum, or any drawings furnished by the Commissioner, pertaining or supplemental thereto.

2.1.11 "**Contract Work**" shall mean everything required to be furnished and done by the Contractor by any one or more of the parts of the Contract referred to in Article 1, except Extra Work as hereinafter defined.

2.1.12 "**Contractor**" shall mean the entity which executed this Contract, whether a corporation, firm, partnership, joint venture, individual, or any combination thereof, and its, their, his/her successors, personal representatives, executors, administrators, and assigns, and any person, firm, partnership, joint venture, individual, or corporation which shall at any time be substituted in the place of the Contractor under this Contract.

2.1.13 "**Days**" shall mean calendar days, except where otherwise specified.

2.1.14 "**Engineer**" or "**Architect**" or "**Project Manager**" shall mean the person so designated in writing by the Commissioner in the Notice to Proceed or the Order to Work to act as such in relation to this Contract, including a private Architect or Engineer or Project Manager, as the case may be. Subject to written approval by the Commissioner, the Engineer, Architect or Project Manager may designate an authorized representative.

2.1.15 "**Engineering Audit Officer**" (EAO) shall mean the person so designated by the Commissioner to perform responsible auditing functions hereunder.

2.1.16 "**Extra Work**" shall mean Work other than that required by the Contract at the time of award which is authorized by the Commissioner pursuant to Chapter VI of this Contract.

2.1.17 "**Federal-Aid Contract**" shall mean a contract in which the United States (federal) Government provides financial funding as so designated in the Information for Bidders.

2.1.18 "**Final Acceptance**" shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

2.1.19 "**Final Approved Punch List**" shall mean a list, approved pursuant to Article 14.2.2, specifying those items of Work to be completed by the Contractor after Substantial Completion and dates for the completion of each item of Work.

2.1.20 "**Law**" or "**Laws**" shall mean the Constitution of the State of New York, the New York City Charter, the New York City Administrative Code, a statute of the United States or of the State of New York, a local law of the City of New York, any ordinance, rule or regulation having the force of law, or common law.

2.1.21 "**Materialman**" shall mean any corporation, firm, partnership, joint venture, or individual, other than employees of the Contractor, who or which contracts with the Contractor or any Subcontractor, to fabricate or deliver, or who actually fabricates or delivers, plant, materials or equipment to be incorporated in the Work.

2.1.22 "**Means and Methods of Construction**" shall mean the labor, materials, temporary structures, tools, plant, and construction equipment, and the manner and time of their use, necessary to accomplish the result intended by this Contract.

2.1.23 "**Notice to Proceed**" or "**Order to Work**" shall mean the written notice issued by the Commissioner specifying the time for commencement of the Work and the Engineer, Architect or Project Manager.

2.1.24 "**Other Contractor(s)**" shall mean any contractor (other than the entity which executed this Contract or its Subcontractors) who or which has a contract with the City for work on or adjacent to the building or Site of the Work.

2.1.25 "**Payroll Taxes**" shall mean State Unemployment Insurance (SUI), Federal Unemployment Insurance (FUI), and payments pursuant to the Federal Insurance Contributions Act (FICA).

2.1.26 "**Project**" shall mean the public improvement to which this Contract relates.

2.1.27 "**Procurement Policy Board**" (PPB) shall mean the Agency of the City of New York whose function is to establish comprehensive and consistent procurement policies and rules which shall have broad application throughout the City.

2.1.28 "**Required Quantity**" in a unit price Contract shall mean the actual quantity of any item of Work or materials which is required to be performed or furnished in order to comply with the Contract.

2.1.29 "**Resident Engineer**" shall mean the representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the Work.

2.1.30 "**Site**" shall mean the area upon or in which the Contractor's operations are carried on, and such other areas adjacent thereto as may be designated as such by the Engineer.

2.1.31 "**Small Tools**" shall mean items that are ordinarily required for a worker's job function, including but not limited to, equipment that ordinarily has no licensing, insurance

or substantive storage costs associated with it; such as circular and chain saws, impact drills, threaders, benders, wrenches, socket tools, etc.

2.1.32 "**Specifications**" shall mean all of the directions, requirements, and standards of performance applying to the Work as hereinafter detailed and designated under the Specifications.

2.1.33 "**Subcontractor**" shall mean any person, firm or corporation, other than employees of the Contractor, who or which contracts with the Contractor or with its subcontractors to furnish, or actually furnishes labor, or labor and materials, or labor and equipment, or superintendence, supervision and/or management at the Site. Wherever the word Subcontractor appears, it shall also mean sub-Subcontractor.

2.1.34 "**Substantial Completion**" shall mean the written determination by the Engineer that the Work required under this Contract is substantially, but not entirely, complete and the approval of the **Final Approved Punch List**.

2.1.35 "**Work**" shall mean all services required to complete the Project in accordance with the Contract Documents, including without limitation, labor, material, superintendence, management, administration, equipment, and incidentals, and obtaining any and all permits, certifications and licenses as may be necessary and required to complete the Work, and shall include both Contract Work and Extra Work.

## CHAPTER II THE WORK AND ITS PERFORMANCE

### ARTICLE 3. CHARACTER OF THE WORK

3.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Work** shall be performed in accordance with the best modern practice, utilizing, unless otherwise specified in writing, new and unused materials of standard first grade quality and workmanship and design of the highest quality, to the satisfaction of the **Commissioner**.

### ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION

4.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Means and Methods of Construction** shall be such as the Contractor may choose; subject, however, to the **Engineer's** right to reject the **Means and Methods of Construction** proposed by the **Contractor** which in the opinion of the **Engineer**:

4.1.1 Will constitute or create a hazard to the **Work**, or to persons or property; or

4.1.2 Will not produce finished **Work** in accordance with the terms of the **Contract**; or

4.1.3 Will be detrimental to the overall progress of the **Project**.

4.2 The **Engineer's** approval of the **Contractor's Means and Methods of Construction**, or his/her failure to exercise his/her right to reject such means or methods, shall not relieve the **Contractor** of its obligation to complete the **Work** as provided in this **Contract**; nor shall the exercise of such right to reject create a cause of action for damages.

## ARTICLE 5. COMPLIANCE WITH LAWS

5.1 The **Contractor** shall comply with all **Laws** applicable to this **Contract** and to the **Work** to be done hereunder.

5.2 Procurement Policy Board Rules: This **Contract** is subject to the Rules of the **PPB** ("PPB Rules") in effect at the time of the bid opening for this **Contract**. In the event of a conflict between the **PPB** Rules and a provision of this **Contract**, the **PPB** Rules shall take precedence.

5.3 Noise Control Code provisions.

5.3.1 In accordance with the provisions of Section 24-216(b) of the Administrative Code of the **City** ("Administrative Code"), Noise Abatement Contract Compliance, devices and activities which will be operated, conducted, constructed or manufactured pursuant to this **Contract** and which are subject to the provisions of the **City** Noise Control Code shall be operated, conducted, constructed, or manufactured without causing a violation of the Administrative Code. Such devices and activities shall incorporate advances in the art of noise control development for the kind and level of noise emitted or produced by such devices and activities, in accordance with regulations issued by the **Commissioner** of the **City** Department of Environmental Protection.

5.3.2 The **Contractor** agrees to comply with Section 24-219 of the Administrative Code and implementing rules codified at 15 Rules of the City of New York ("RCNY") Section 28-100 *et seq.* In accordance with such provisions, the **Contractor**, if the **Contractor** is the responsible party under such regulations, shall prepare and post a Construction Noise Mitigation Plan at each **Site**, in which the **Contractor** shall certify that all construction tools and equipment have been maintained so that they operate at normal manufacturers operating specifications. If the **Contractor** cannot make this certification, it must have in place an Alternative Noise Mitigation Plan approved by the **City** Department of Environmental Protection. In addition, the **Contractor's** certified Construction Noise Mitigation Plan is subject inspection by the **City** Department of Environmental Protection in accordance with Section 28-101 of Title 15 of RCNY. No **Contract Work** may take place at a **Site** unless there is a Construction Noise Mitigation Plan or approved Alternative Noise Mitigation Plan in place. In addition, the **Contractor** shall create and implement a noise mitigation training program. Failure to comply with these requirements may result in fines and other penalties pursuant to the applicable provisions of the Administrative Code and RCNY.

5.4 Ultra Low Sulfur Diesel Fuel: In accordance with the provisions of Section 24-163.3 of the Administrative Code, the **Contractor** specifically agrees as follows:

5.4.1 Definitions. For purposes of this Article 5.4, the following definitions apply:

5.4.1(a) "Contractor" means any person or entity that enters into a Public Works Contract with a **City Agency**, or any person or entity that enters into an agreement with such person or entity, to perform work or provide labor or services related to such Public Works Contract.

5.4.1(b) "Motor Vehicle" means any self-propelled vehicle designed for transporting persons or property on a street or highway.

5.4.1(c) "Nonroad Engine" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of

Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.4.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this term shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) horsepower or less and that are not used in any construction program or project.

5.4.1(e) "Public Works Contract" means a contract with a **City Agency** for a construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; a contract with a **City Agency** for the preparation for any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; or a contract with a **City Agency** for any final work involved in the completion of any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge.

5.4.1(f) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

#### 5.4.2 Ultra Low Sulfur Diesel Fuel

5.4.2(a) All **Contractors** shall use Ultra Low Sulfur Diesel Fuel in diesel-powered Nonroad Vehicles in the performance of this **Contract**.

5.4.2(b) Notwithstanding the requirements of Article 5.4.2(a), **Contractors** may use diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) to fulfill the requirements of this Article 5.4.2, where the Commissioner of the City Department of Environmental Protection ("DEP Commissioner") has issued a determination that a sufficient quantity of Ultra Low Sulfur Diesel Fuel is not available to meet the needs of **Agencies** and **Contractors**. Any such determination shall expire after six (6) months unless renewed.

5.4.2(c) **Contractors** shall not be required to comply with this Article 5.4.2 where the **City Agency** letting this **Contract** makes a written finding, which is approved, in writing, by the DEP Commissioner, that a sufficient quantity of Ultra Low Sulfur Diesel Fuel, or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is not available to meet the requirements of Section 24-163.3 of the Administrative Code, provided that such **Contractor** in its fulfillment of the requirements of this **Contract**, to the extent practicable, shall use whatever quantity of Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is available. Any finding made pursuant to this Article 5.4.2(c) shall expire after sixty (60) **Days**, at which time the requirements of this Article 5.4.2 shall be in full force and effect unless the **City Agency** renews the finding in writing and such renewal is approved by the DEP Commissioner.



5.4.2(d) **Contractors** may check on determinations and approvals issued by the DEP Commissioner pursuant to Section 24-163.3 of the Administrative Code, if any, at [www.dep.nyc.gov](http://www.dep.nyc.gov) or by contacting the **City Agency** letting this **Contract**.

5.4.2(e) The requirements of this Article 5.4.2 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

#### 5.4.3 Best Available Technology

5.4.3(a) All **Contractors** shall utilize the best available technology for reducing the emission of pollutants for diesel-powered Nonroad Vehicles in the performance of this **Contract**. For determinations of best available technology for each type of diesel-powered Nonroad Vehicle, **Contractors** shall comply with the regulations of the City Department of Environmental Protection, as and when adopted, Chapter 14 of Title 15 of the Rules of the City of New York (RCNY). The **Contractor** shall fully document all steps in the best available technology selection process and shall furnish such documentation to the **City Agency** or the DEP Commissioner upon request. The **Contractor** shall retain all documentation generated in the best available technology selection process for as long as the selected best available technology is in use.

5.4.3(b) No **Contractor** shall be required to replace best available technology for reducing the emission of pollutants or other authorized technology utilized for a diesel-powered Nonroad Vehicle in accordance with the provisions of this Article 5.4.3 within three (3) years of having first utilized such technology for such vehicle.

5.4.3(c) This Article 5.4.3 shall not apply to any vehicle used to satisfy the requirements of a specific Public Works Contract for fewer than twenty (20) Days.

5.4.3(d) The **Contractor** shall not be required to comply with this Article 5.4.3 with respect to a diesel-powered Nonroad Vehicle under the following circumstances:

5.4.3(d)(i) Where the **City Agency** makes a written finding, which is approved, in writing, by the DEP Commissioner, that the best available technology for reducing the emission of pollutants as required by this Article 5.4.3 is unavailable for such vehicle, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle.

5.4.3(d)(ii) Where the DEP Commissioner has issued a written waiver based upon the **Contractor** having demonstrated to the DEP Commissioner that the use of the best available technology for reducing the emission of pollutants might endanger the operator of such vehicle or those working near such vehicle, due to engine malfunction, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle, which would not endanger the operator of such vehicle or those working near such vehicle.

5.4.3(d)(iii) In determining which technology to use for the purposes of Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above, the **Contractor** shall primarily consider the reduction in emissions of particulate matter and secondarily consider the reduction in emissions of nitrogen oxides associated with the use of such

technology, which shall in no event result in an increase in the emissions of either such pollutant.

5.4.3(d)(iv) The **Contractor** shall submit requests for a finding or a waiver pursuant to this Article 5.4.3(d) in writing to the DEP Commissioner, with a copy to the **ACCO** of the **City Agency** letting this **Contract**. Any finding or waiver made or issued pursuant to Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above shall expire after one hundred eighty (180) **Days**, at which time the requirements of Article 5.4.3(a) shall be in full force and effect unless the **City Agency** renews the finding, in writing, and the DEP Commissioner approves such finding, in writing, or the DEP Commissioner renews the waiver, in writing.

5.4.3(e) The requirements of this Article 5.4.3 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.4 Section 24-163 of the Administrative Code. The **Contractor** shall comply with Section 24-163 of the Administrative Code related to the idling of the engines of motor vehicles while parking.

#### 5.4.5 Compliance

5.4.5(a) The **Contractor's** compliance with Article 5.4 may be independently monitored. If it is determined that the **Contractor** has failed to comply with any provision of Article 5.4, any costs associated with any independent monitoring incurred by the **City** shall be reimbursed by the **Contractor**.

5.4.5(b) Any **Contractor** who violates any provision of Article 5.4, except as provided in Article 5.4.5(c) below, shall be liable for a civil penalty between the amounts of one thousand (\$1,000) and ten thousand (\$10,000) dollars, in addition to twice the amount of money saved by such **Contractor** for failure to comply with Article 5.4.

5.4.5(c) No **Contractor** shall make a false claim with respect to the provisions of Article 5.4 to a **City Agency**. Where a **Contractor** has been found to have done so, such **Contractor** shall be liable for a civil penalty of twenty thousand (\$20,000) dollars, in addition to twice the amount of money saved by such **Contractor** in association with having made such false claim.

#### 5.4.6 Reporting

5.4.6(a) For all Public Works Contracts covered by this Article 5.4, the **Contractor** shall report to the **City Agency** the following information:

5.4.6(a)(i) The total number of diesel-powered Nonroad Vehicles used to fulfill the requirements of this Public Works Contract;

5.4.6(a)(ii) The number of such Nonroad Vehicles that were powered by Ultra Low Sulfur Diesel Fuel;

5.4.6(a)(iii) The number of such Nonroad Vehicles that utilized the best available technology for reducing the emission of pollutants, including a breakdown by vehicle model and the type of technology;

5.4.6(a)(iv) The number of such Nonroad Vehicles that utilized such other authorized technology in accordance with Article 5.4.3, including a breakdown by vehicle model and the type of technology used for each such vehicle;

5.4.6(a)(v) The locations where such Nonroad Vehicles were used; and

5.4.6(a)(vi) Where a determination is in effect pursuant to Article 5.4.2(b) or 5.4.2(c), detailed information concerning the **Contractor's** efforts to obtain Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm).

5.4.6(b) The **Contractor** shall submit the information required by Article 5.4.6(a) at the completion of **Work** under the Public Works Contract and on a yearly basis no later than August 1 throughout the term of the Public Works Contract. The yearly report shall cover **Work** performed during the preceding fiscal year (July 1 - June 30).

5.5 Ultra Low Sulfur Diesel Fuel. In accordance with the Coordinated Construction Act for Lower Manhattan, as amended:

5.5.1 Definitions. For purposes of this Article 5.5, the following definitions apply:

5.5.1(a) "Lower Manhattan" means the area to the south of and within the following lines: a line beginning at a point where the United States pierhead line in the Hudson River as it exists now or may be extended would intersect with the southerly line of West Houston Street in the Borough of Manhattan extended, thence easterly along the southerly side of West Houston Street to the southerly side of Houston Street, thence easterly along the southerly side of Houston Street to the southerly side of East Houston Street, thence northeasterly along the southerly side of East Houston Street to the point where it would intersect with the United States pierhead line in the East River as it exists now or may be extended, including tax lots within or immediately adjacent thereto.

5.5.1(b) "Lower Manhattan Redevelopment Project" means any project in Lower Manhattan that is funded in whole or in part with federal or State funding, or any project intended to improve transportation between Lower Manhattan and the two air terminals in the City known as LaGuardia Airport and John F. Kennedy International Airport, or between Lower Manhattan and the air terminal in Newark known as Newark Liberty International Airport, and that is funded in whole or in part with federal funding.

5.5.1(c) "Nonroad Engine" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.5.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower (HP) and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except

that this terms shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) HP or less and that are not used in any construction program or project.

5.5.1(e) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.5.2 Requirements. **Contractors** and **Subcontractors** are required to use only Ultra Low Sulfur Diesel Fuel to power the diesel-powered Nonroad Vehicles with engine HP rating of fifty (50) HP and above used on a Lower Manhattan Redevelopment Project and, where practicable, to reduce the emission of pollutants by retrofitting such Nonroad Vehicles with oxidation catalysts, particulate filters, or technology that achieves lowest particulate matter emissions.

5.6 Pesticides. In accordance with Section 17-1209 of the Administrative Code, to the extent that the **Contractor** or any **Subcontractor** applies pesticides to any property owned or leased by the **City**, the **Contractor**, and any **Subcontractor** shall comply with Chapter 12 of the Administrative Code.

5.7 Waste Treatment, Storage, and Disposal Facilities and Transporters. In connection with the **Work**, the **Contractor** and any **Subcontractor** shall use only those waste treatment, storage, and disposal facilities and waste transporters that possess the requisite license, permit or other governmental approval necessary to treat, store, dispose, or transport the waste, materials or hazardous substances.

5.8 Environmentally Preferable Purchasing. The **Contractor** shall ensure that products purchased or leased by the **Contractor** or any **Subcontractor** for the **Work** that are not specified by the **City** or are submitted as equivalents to a product specified by the **City** comply with the requirements of the New York City Environmentally Preferable Purchasing Program contained in Chapter 11 of Title 43 of the RCNY, pursuant to Chapter 3 of Title 6 of the Administrative Code.

## ARTICLE 6. INSPECTION

6.1 During the progress of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall at all times afford the representatives of the **City** every reasonable, safe, and proper facility for inspecting all **Work** done or being done at the **Site** and also for inspecting the manufacture or preparation of materials and equipment at the place of such manufacture or preparation.

6.2 The **Contractor's** obligation hereunder shall include the uncovering or taking down of finished **Work** and its restoration thereafter; provided, however, that the order to uncover, take down and restore shall be in writing, and further provided that if **Work** thus exposed proves satisfactory, and if the **Contractor** has complied with Article 6.1, such uncovering or taking down and restoration shall be considered an item of **Extra Work** to be paid for in accordance with the provisions of Article 26. If the **Work** thus exposed proves unsatisfactory, the **City** has no obligation to compensate the **Contractor** for the uncovering, taking down or restoration.

6.3 Inspection and approval by the **Commissioner**, the **Engineer**, **Project Manager**, or **Resident Engineer**, of finished **Work** or of **Work** being performed, or of materials and equipment at the place of manufacture or preparation, shall not relieve the **Contractor** of its obligation to perform the **Work** in strict accordance with the **Contract**. Finished or unfinished **Work** not found to be in strict accordance with the **Contract** shall be replaced as directed by the **Engineer**, even though such **Work** may have been previously approved and paid for. Such corrective **Work** is **Contract Work** and shall not be deemed **Extra Work**.

6.4 Rejected **Work** and materials shall be promptly taken down and removed from the **Site**, which must at all times be kept in a reasonably clean and neat condition.

**ARTICLE 7. PROTECTION OF WORK AND OF PERSONS  
AND PROPERTY; NOTICES AND INDEMNIFICATION**

7.1 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall be under an absolute obligation to protect the finished and unfinished **Work** against any damage, loss, injury, theft and/or vandalism and in the event of such damage, loss, injury, theft and/or vandalism, it shall promptly replace and/or repair such **Work** at the **Contractor's** sole cost and expense, as directed by the **Resident Engineer**. The obligation to deliver finished **Work** in strict accordance with the **Contract** prior to **Final Acceptance** shall be absolute and shall not be affected by the **Resident Engineer's** approval of, or failure to prohibit, the **Means and Methods of Construction** used by the **Contractor**.

7.2 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall take all reasonable precautions to protect all persons and the property of the **City** and of others from damage, loss or injury resulting from the **Contractor's**, and/or its **Subcontractors'** operations under this **Contract**. The **Contractor's** obligation to protect shall include the duty to provide, place or replace, and adequately maintain at or about the **Site** suitable and sufficient protection such as lights, barricades, and enclosures.

7.3 The **Contractor** shall comply with the notification requirements set forth below in the event of any loss, damage or injury to **Work**, persons or property, or any accidents arising out of the operations of the **Contractor** and/or its **Subcontractors** under this **Contract**.

7.3.1 The **Contractor** shall make a full and complete report in writing to the **Resident Engineer** within three (3) **Days** after the occurrence.

7.3.2 The **Contractor** shall also send written notice of any such event to all insurance carriers that issued potentially responsive policies (including commercial general liability insurance carriers for events relating to the **Contractor's** own employees) no later than twenty (20) days after such event and again no later than twenty (20) days after the initiation of any claim and/or action resulting therefrom. Such notice shall contain the following information: the number of the insurance policy, the name of the Named Insured, the date and location of the incident, and the identity of the persons injured or property damaged. For any policy on which the **City** and/or the **Engineer, Architect, or Project Manager** are Additional Insureds, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Additional Insured, such other Additional Insureds, as well as the Named Insured."

7.3.2(a) Whenever such notice is sent under a policy on which the **City** is an Additional Insured, the **Contractor** shall provide copies of the notice to the **Comptroller, the Commissioner** and the **City Corporation Counsel**. The copy to the **Comptroller** shall be sent to the Insurance Unit, NYC Comptroller's Office, 1 Centre Street - Room 1222, New York, New York, 10007. The copy to the **Commissioner** shall be sent to the address set forth in Schedule A of the General Conditions. The copy to the **City Corporation Counsel** shall be sent to Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

7.3.2(b) If the **Contractor** fails to provide any of the foregoing notices to any appropriate insurance carrier(s) in a timely and complete manner, the **Contractor** shall indemnify the **City** for all losses, judgments, settlements, and expenses, including reasonable attorneys' fees, arising from an insurer's disclaimer of coverage citing late notice by or on behalf of the **City**.

7.4 To the fullest extent permitted by law, the **Contractor** shall defend, indemnify, and hold the **City**, its employees, and officials (the "Indemnitees") harmless against any and all claims (including but not limited to claims asserted by any employee of the **Contractor** and/or its **Subcontractors**) and costs and expenses of whatever kind (including but not limited to payment or reimbursement of attorneys' fees and disbursements) allegedly arising out of or in any way related to the operations of the **Contractor** and/or its **Subcontractors** in the performance of this **Contract** or from the **Contractor's** and/or its **Subcontractors'** failure to comply with any of the provisions of this **Contract** or of the **Law**. Such costs and expenses shall include all those incurred in defending the underlying claim and those incurred in connection with the enforcement of this Article 7.4 by way of cross-claim, third-party claim, declaratory action or otherwise. The parties expressly agree that the indemnification obligation hereunder contemplates (1) full indemnity in the event of liability imposed against the Indemnitees without negligence and solely by reason of statute, operation of **Law** or otherwise; and (2) partial indemnity in the event of any actual negligence on the part of the Indemnitees either causing or contributing to the underlying claim (in which case, indemnification will be limited to any liability imposed over and above that percentage attributable to actual fault whether by statute, by operation of **Law**, or otherwise). Where partial indemnity is provided hereunder, all costs and expenses shall be indemnified on a pro rata basis.

7.4.1 Indemnification under Article 7.4 or any other provision of the **Contract** shall operate whether or not **Contractor** or its **Subcontractors** have placed and maintained the insurance specified under Article 22.

7.5 The provisions of this Article 7 shall not be deemed to create any new right of action in favor of third parties against the **Contractor** or the **City**.

### CHAPTER III TIME PROVISIONS

#### ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK

8.1 The **Contractor** shall commence the **Work** on the date specified in the **Notice to Proceed** or the **Order to Work**. The time for performance of the **Work** under the **Contract** shall be computed from the date specified in the **Notice to Proceed** or the **Order to Work**. **TIME BEING OF THE ESSENCE** to the **City**, the **Contractor** shall thereafter prosecute the **Work** diligently, using such **Means and Methods of Construction** as are in accord with Article 4 herein and as will assure its completion not later than the date specified in this **Contract**, or on the date to which the time for completion may be extended.

#### ARTICLE 9. PROGRESS SCHEDULES

9.1 To enable the **Work** to be performed in an orderly and expeditious manner, the **Contractor**, within fifteen (15) **Days** after the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Engineer**, shall submit to the **Engineer** a proposed progress schedule based on the Critical Path Method in the form of a bar graph or in such other form as specified by the **Engineer**, and monthly cash flow requirements, showing:

9.1.1 The anticipated time of commencement and completion of each of the various operations to be performed under this **Contract**; and

9.1.2 The sequence and interrelation of each of these operations with the others and with those of other related contracts; and

9.1.3 The estimated time required for fabrication or delivery, or both, of all materials and equipment required for the **Work**, including the anticipated time for obtaining required approvals pursuant to Article 10; and

9.1.4 The estimated amount in dollars the **Contractor** will claim on a monthly basis.

9.2 The proposed schedule shall be revised as directed by the **Engineer**, until finally approved by the **Engineer**, and after such approval, subject to the provisions of Article 11, shall be strictly adhered to by the **Contractor**.

9.3 If the **Contractor** shall fail to adhere to the approved progress schedule, or to the schedule as revised pursuant to Article 11, it shall promptly adopt such other or additional **Means and Methods of Construction**, at its sole cost and expense, as will make up for the time lost and will assure completion in accordance with the approved progress schedule. The approval by the **City** of a progress schedule which is shorter than the time allotted under the **Contract** shall not create any liability for the **City** if the approved progress schedule is not met.

9.4 The **Contractor** will not receive any payments until the proposed progress schedule is submitted.

#### **ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL**

10.1 From time to time as the **Work** progresses and in the sequence indicated by the approved progress schedule, the **Contractor** shall submit to the **Engineer** a specific request in writing for each item of information or approval required by the **Contractor**. These requests shall state the latest date upon which the information or approval is actually required by the **Contractor**, and shall be submitted in a reasonable time in advance thereof to provide the **Engineer** a sufficient time to act upon such submissions, or any necessary re-submissions thereof.

10.2 The **Contractor** shall not have any right to an extension of time on account of delays due to the **Contractor's** failure to submit requests for the required information or the required approval in accordance with the above requirements.

#### **ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY**

11.1 After the commencement of any condition which is causing or may cause a delay in completion of the **Work**, including conditions for which the **Contractor** may be entitled to an extension of time, the following notifications and submittals are required:

11.1.1 Within seven (7) **Days** after the commencement of such condition, the **Contractor** must notify the **Engineer** in writing of the existence, nature and effect of such condition upon the approved progress schedule and the **Work**, and must state why and in what respects, if any, the condition is causing or may cause a delay.

11.1.2 If the **Contractor** shall claim to be sustaining damages for delay as provided for in this Article 11, within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter for as long as such damages are being incurred, the **Contractor** shall submit to the **Commissioner** verified written statements of the details and the amounts of such damages, together with documentary evidence of such damages, ("statement of delay damages") as further detailed in Article 11.6. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. On failure of the **Contractor** to strictly comply with all of the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action arising under or by reason of this **Contract** shall not be different from or in excess of the statements made and documentation provided pursuant to this Article 11.

11.1.3 Within 60 days of submission of the final verified statement of claims pursuant to Article 11.6, the **Commissioner** shall make a determination as to whether a compensable delay has occurred and, if so, the amount of compensation due the **Contractor**. Notwithstanding the above, the **Commissioner** may make a determination as to whether a compensable delay has occurred at any time after the **Contractor's** first submission of a statement of delay damages provided, however, that the amount of compensation due to the **Contractor** will not be determined until the **Commissioner** determines that the **Work** is delayed after the date set for substantial completion.

11.2 Failure of the **Contractor** to strictly comply with the requirements of Article 11.1.1 may, in the discretion of the **Commissioner**, be deemed sufficient cause to deny any extension of time on account of delay arising out of such condition. Failure of the **Contractor** to strictly comply with the requirements of Articles 11.1.1 and 11.1.2 shall be deemed a conclusive waiver by the **Contractor** of any and all claims for damages for delay arising from such condition and no right to recover on such claims shall exist.

11.3 When appropriate and directed by the **Engineer**, the progress schedule shall be revised by the **Contractor** until finally approved by the **Engineer**. The revised progress schedule must be strictly adhered to by the **Contractor**.

#### 11.4 Compensable Delays

11.4.1 The **Contractor** agrees to make claim only for additional costs attributable to delay in the performance of this **Contract** necessarily extending the time for completion of the **Work** or resulting from acceleration directed by the **Commissioner** and required to maintain the **Project** schedule, occasioned solely by any act or omission to act of the **City** listed below. The **Contractor** also agrees that delay from any other cause shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**.

11.4.1.1 The failure of the **City** to take reasonable measures to coordinate and progress the **Work**, except that the **City** shall not be responsible for the **Contractor's** obligation to coordinate and progress the **Work** of its **Subcontractors**.

11.4.1.2 Extended delays attributable to the **City** in the review or issuance of change orders, in shop drawing reviews and approvals or as a result of the cumulative impact of multiple change orders, which have a verifiable impact on **Project** costs.

11.4.1.3 The unavailability of the **Site** for an extended period of time that significantly affects the scheduled completion of the **Contract**.



- 11.4.1.4 The issuance by the **Engineer** of a stop work order relative to a substantial portion of the **Work** for a period exceeding thirty (30) **Days**, that was not brought about through any action or omission of the **Contractor**.
- 11.4.1.5 Differing site conditions that were neither known nor reasonably ascertainable on a pre-bid inspection of the **Site** or review of the bid documents or other publicly available sources, and that are not ordinarily encountered in the **Project's** geographical area or neighborhood or in the type of **Work** to be performed.
- 11.4.1.6 Delays caused by the **City's** bad faith or its willful, malicious, or grossly negligent conduct;
- 11.4.1.7 Delays not contemplated by the parties;
- 11.4.1.8 Delays so unreasonable that they constitute an intentional abandonment of the **Contract** by the **City**; and
- 11.4.1.9 Delays resulting from the **City's** breach of a fundamental obligation of the **Contract**.

11.4.2 No claim may be made for any alleged delay in **Substantial Completion** of the **Work** by a date earlier than the date of **Substantial Completion** provided for in Schedule A unless there is a provision in the **Contract** providing for additional compensation for early completion. No claim may be made for any alleged delay in **Substantial Completion** of the **Work** if the work is substantially completed by the date of **Substantial Completion** provided for in Schedule A unless acceleration has been directed by the **Commissioner** to meet the date of **Substantial Completion** set forth in Schedule A.

11.4.3 The provisions of this Article 11 apply only to claims for additional costs attributable to delay and do not preclude determinations by the **Commissioner** allowing reimbursements for additional costs for **Extra Work** pursuant to Articles 25 and 26 of this **Contract**. To the extent that any cost attributable to delay is reimbursed as part of a change order, no additional claim for compensation under this Article 11 shall be allowed.

11.5 Non-Compensable Delays. The **Contractor** agrees to make no claim for, and is deemed to have included in its bid prices for the various items of the **Contract**, the extra/additional costs attributable to any delays caused by or attributable to the items set forth below. For such items, the **Contractor** shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**, in accordance with the provisions of Article 13. Such extensions of time will be granted, if at all, pursuant to the grounds set forth in Article 13.3.

11.5.1 The acts or omissions of any third parties, including but not limited to **Other Contractors**, public/ governmental bodies (other than **City Agencies**), utilities or private enterprises, who are disclosed in the **Contract Documents** or are ordinarily encountered or generally recognized as related to the **Work**;

11.5.2 Any situation which was within the contemplation of the parties at the time of entering into the **Contract**, including any delay indicated or disclosed in the **Contract Documents** or generally recognized as related to the nature of the **Work**, and/or the existence of any facility or appurtenance owned, operated or maintained by any third party, as indicated or disclosed in the **Contract Documents** or ordinarily encountered or generally recognized as related to the nature of the **Work**;

11.5.3 Restraining orders, injunctions or judgments issued by a court which were caused by a Contractor's submission, action or inaction or by a Contractor's **Means and Methods of**

**Construction**, or by third parties, unless such order, injunction or judgment was the result of an action or omission by the **City**;

11.5.4 Any labor boycott, strike, picketing, lockout or similar situation;

11.5.5 Any shortages of supplies or materials, or unavailability of equipment, required by the **Contract Work**;

11.5.6 Climatic conditions, storms, floods, droughts, tidal waves, fires, hurricanes, earthquakes, landslides or other catastrophes or acts of God, or acts of war or of the public enemy or terrorist acts, including the **City's** reasonable responses thereto; and

11.5.7 **Extra Work** which does not significantly affect the overall completion of the **Contract**, reasonable delays in the review or issuance of change orders or field orders and/or in shop drawing reviews or approvals.

#### 11.6 Required Content of Submission of Statement of Delay Damages

11.6.1 In the verified written statement of delay damages required by Article 11.1.2, the following information shall be provided by the **Contractor**:

11.6.1.1 For each delay, the start and end dates of the claimed periods of delay and, in addition, a description of the operations that were delayed, an explanation of how they were delayed, and the reasons for the delay, including identifying the applicable act or omission of the **City** listed in Article 11.4.

11.6.1.2 A detailed factual statement of the claim providing all necessary dates, locations and items of **Work** affected by the claim.

11.6.1.3 The amount of additional compensation sought and a breakdown of that amount into categories as described in Article 26.2, subject to the limitations set forth in Article 11.7.

11.6.1.4 Any additional information requested by the **Commissioner**.

#### 11.7 Recoverable Costs

11.7.1 Delay damages may be recoverable for the following costs actually and necessarily incurred in the performance of the **Work**:

11.7.1.1 Direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits, based on time and materials records;

11.7.1.2 Necessary materials (including transportation to the **Site**), based on time and material records;

11.7.1.3 Reasonable rental value of necessary plant and equipment other than small tools, plus fuel/energy costs according to the applicable formula set forth in Articles 26.2.4 and/or 26.2.8, based on time and material records;

11.7.1.4 Insurance and bond costs;

11.7.1.5 Extended field office costs;

11.7.1.6 Extended **Site** overhead; and

11.7.1.7 Extended home office overhead.

11.7.2 Recoverable Subcontractor Costs. When the **Work** is performed by a **Subcontractor**, the **Contractor** may be paid the actual and necessary costs of such subcontracted **Work** as outlined above in Articles 11.7.1.1 through 11.7.1.6, and an

additional overhead of five (5%) percent of the costs outlined in Articles 11.7.1.1 through 11.7.1.3.

11.7.3 Non-Recoverable Costs. The parties agree that the **City** will have no liability for the following items and the **Contractor** agrees it shall make no claim for the following items:

11.7.3.1 Profit, or loss of anticipated or unanticipated profit;

11.7.3.2 Consequential damages, including but not limited to interest on monies in dispute, including interest which is paid on such monies, loss of bonding capacity, bidding opportunities, or interest in investment, or any resulting insolvency;

11.7.3.3 Indirect costs or expenses of any nature;

11.7.3.4 Direct or indirect costs attributable to performance of **Work** where the **Contractor**, because of situations or conditions within its control, has not progressed the **Work** in a satisfactory manner; and

11.7.3.5 Attorneys' fees and dispute and claims preparation expenses.

11.8 Determinations under this Article 11 are not subject to the jurisdiction of the Contract Dispute Resolution Board pursuant to the dispute resolution process set forth in Article 27.

11.9 If the parties agree, pursuant to Article 11.1.3 above, that a compensable delay has occurred and agree on the amount of compensation, payment may be made pursuant to a written change order. Payment pursuant to such change order is subject to pre-audit by the **Engineering Audit Officer**, and may be post-audited by the **Comptroller** and/or the **Agency**.

## ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS

12.1 During the progress of the **Work**, **Other Contractors** may be engaged in performing other work or may be awarded other contracts for additional work on this **Project**. In that event, the **Contractor** shall coordinate the **Work** to be done hereunder with the work of such **Other Contractors** and the **Contractor** shall fully cooperate with such **Other Contractors** and carefully fit its own **Work** to that provided under other contracts as may be directed by the **Engineer**. The **Contractor** shall not commit or permit any act which will interfere with the performance of work by any **Other Contractors**.

12.2 If the **Engineer** determines that the **Contractor** is failing to coordinate its **Work** with the work of **Other Contractors** as the **Engineer** has directed, then the **Commissioner** shall have the right to withhold any payments otherwise due hereunder until the **Contractor** completely complies with the **Engineer's** directions.

12.3 The **Contractor** shall notify the **Engineer** in writing if any **Other Contractor** on this **Project** is failing to coordinate its work with the **Work** of this **Contract**. If the **Engineer** finds such charges to be true, the **Engineer** shall promptly issue such directions to the **Other Contractor** with respect thereto as the situation may require. The **City** shall not, however, be liable for any damages suffered by any **Other Contractor's** failure to coordinate its work with the **Work** of this **Contract** or by reason of the **Other Contractor's** failure to promptly comply with the directions so issued by the **Engineer**, or by reason of any **Other Contractor's** default in performance, it being understood that the **City** does not guarantee the responsibility or continued efficiency of any contractor. The **Contractor** agrees to make no claim against

the **City** for any damages relating to or arising out of any directions issued by the **Engineer** pursuant to this Article 12 (including but not limited to the failure of any **Other Contractor** to comply or promptly comply with such directions), or the failure of the **Engineer** to issue any directions, or the failure of any **Other Contractor** to coordinate its work, or the default in performance of any **Other Contractor**.

12.4 The **Contractor** shall indemnify and hold the **City** harmless from any and all claims or judgments for damages and from costs and expenses to which the **City** may be subjected or which it may suffer or incur by reason of the **Contractor's** failure to comply with the **Engineer's** directions promptly; and the **Comptroller** shall have the right to exercise the powers reserved in Article 23 with respect to any claims which may be made for damages due to the **Contractor's** failure to comply with the **Engineer's** directions promptly. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.5 Should the **Contractor** sustain any damage through any act or omission of any **Other Contractor** having a contract with the **City** for the performance of work upon the **Site** or of work which may be necessary to be performed for the proper prosecution of the **Work** to be performed hereunder, or through any act or omission of a subcontractor of such **Other Contractor**, the **Contractor** shall have no claim against the **City** for such damage, but shall have a right to recover such damage from the **Other Contractor** under the provision similar to the following provisions which apply to this **Contract** and have been or will be inserted in the contracts with such **Other Contractors**:

12.5.1 Should any **Other Contractor** having or who shall hereafter have a contract with the **City** for the performance of work upon the **Site** sustain any damage through any act or omission of the **Contractor** hereunder or through any act or omission of any **Subcontractor** of the **Contractor**, the **Contractor** agrees to reimburse such **Other Contractor** for all such damages and to defend at its own expense any action based upon such claim and if any judgment or claim (even if the allegations of the action are without merit) against the **City** shall be allowed the **Contractor** shall pay or satisfy such judgment or claim and pay all costs and expenses in connection therewith and agrees to indemnify and hold the **City** harmless from all such claims. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.6 The **City's** right to indemnification hereunder shall in no way be diminished, waived or discharged by its recourse to assessment of liquidated damages as provided in Article 15, or by the exercise of any other remedy provided for by **Contract** or by **Law**.

### ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE

13.1 If performance by the **Contractor** is delayed for a reason set forth in Article 13.3, the **Contractor** may be allowed a reasonable extension of time in conformance with this Article 13 and the **PPB** Rules.

13.2 Any extension of time may be granted only by the **ACCO** or by the Board for the Extension of Time (hereafter "Board") (as set forth below) upon written application by the **Contractor**.

13.3 Grounds for Extension: If such application is made, the **Contractor** shall be entitled to an extension of time for delay in completion of the **Work** caused solely:

13.3.1 By the acts or omissions of the **City**, its officials, agents or employees; or

13.3.2 By the act or omissions of **Other Contractors** on this **Project**; or

13.3.3 By supervening conditions entirely beyond the control of either party hereto (such as, but not limited to, acts of God or the public enemy, excessive inclement weather, war or other national emergency making performance temporarily impossible or illegal, or strikes or labor disputes not brought about by any act or omission of the **Contractor**).

13.3.4 The **Contractor** shall, however, be entitled to an extension of time for such causes only for the number of **Days** of delay which the **ACCO** or the Board may determine to be due solely to such causes, and then only if the **Contractor** shall have strictly complied with all of the requirements of Articles 9 and 10.

13.4 The **Contractor** shall not be entitled to receive a separate extension of time for each of several causes of delay operating concurrently, but, if at all, only for the actual period of delay in completion of the **Work** as determined by the **ACCO** or the Board, irrespective of the number of causes contributing to produce such delay. If one of several causes of delay operating concurrently results from any act, fault or omission of the **Contractor** or of its **Subcontractors** or **Materialmen**, and would of itself (irrespective of the concurrent causes) have delayed the **Work**, no extension of time will be allowed for the period of delay resulting from such act, fault or omission.

13.5 The determination made by the **ACCO** or the Board on an application for an extension of time shall be binding and conclusive on the **Contractor**.

13.6 The **ACCO** or the Board acting entirely within their discretion may grant an application for an extension of time for causes of delay other than those herein referred.

13.7 Permitting the **Contractor** to continue with the **Work** after the time fixed for its completion has expired, or after the time to which such completion may have been extended has expired, or the making of any payment to the **Contractor** after such time, shall in no way operate as a waiver on the part of the **City** of any of its rights under this **Contract**.

#### 13.8 Application for Extension of Time:

13.8.1 Before the **Contractor's** time extension request will be considered, the **Contractor** shall notify the **ACCO** of the condition which allegedly has caused or is causing the delay, and shall submit a written application to the **ACCO** identifying:

13.8.1(a) The **Contractor**; the registration number; and **Project** description;

13.8.1(b) Liquidated damage assessment rate, as specified in the **Contract**;

13.8.1(c) Original total bid price;

13.8.1(d) The original **Contract** start date and completion date;

13.8.1(e) Any previous time extensions granted (number and duration); and

13.8.1(f) The extension of time requested.

13.8.2 In addition, the application for extension of time shall set forth in detail:

13.8.2(a) The nature of each alleged cause of delay in completing the **Work**;

13.8.2(b) The date upon which each such cause of delay began and ended and the number of **Days** attributable to each such cause;

13.8.2(c) A statement that the **Contractor** waives all claims except for those delineated in the application, and the particulars of any claims which the **Contractor** does not agree to waive. For time extensions for **Substantial Completion** and final completion payments, the application shall include a detailed statement of the dollar amounts of each element of claim item reserved; and

13.8.2(d) A statement indicating the **Contractor's** understanding that the time extension is granted only for purposes of permitting continuation of **Contract** performance and payment for **Work** performed and that the **City** retains its right to conduct an investigation and assess liquidated damages as appropriate in the future.

### 13.9 Analysis and Approval of Time Extensions:

13.9.1 For time extensions for partial payments, a written determination shall be made by the **ACCO** who may, for good and sufficient cause, extend the time for the performance of the **Contract** as follows:

13.9.1(a) If the **Work** is to be completed within six (6) months, the time for performance may be extended for sixty (60) **Days**;

13.9.1(b) If the **Work** is to be completed within less than one (1) year but more than six (6) months, an extension of ninety (90) **Days** may be granted;

13.9.1(c) If the **Contract** period exceeds one (1) year, besides the extension granted in Article 13.9.1(b), an additional thirty (30) **Days** may be granted for each multiple of six (6) months involved beyond the one (1) year period; or

13.9.1(d) If exceptional circumstances exist, the **ACCO** may extend the time for performance beyond the extensions in Articles 13.9.1(a), 13.9.1(b), and 13.9.1(c). In that event, the **ACCO** shall file with the Mayor's Office of Contract Services a written explanation of the exceptional circumstances.

13.9.2 For extensions of time for **Substantial Completion** and final completion payments, the **Engineer**, in consultation with the **ACCO**, shall prepare a written analysis of the delay (including a preliminary determination of the causes of delay, the beginning and end dates for each such cause of delay, and whether the delays are excusable under the terms of this **Contract**). The report shall be subject to review by and approval of the Board, which shall have authority to question its analysis and determinations and request additional facts or documentation. The report as reviewed and made final by the Board shall be made a part of the **Agency** contract file. Neither the report itself nor anything contained therein shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

13.9.3 Approval Mechanism for Time Extensions for **Substantial Completion** or Final Completion Payments: An extension shall be granted only with the approval of the Board which is comprised of the **ACCO** of the **Agency**, the **City** Corporation Counsel, and the **Comptroller**, or their authorized representatives.

13.9.4 Neither the granting of any application for an extension of time to the **Contractor** or any **Other Contractor** on this **Project** nor the papers, records or reports related to any application for or grant of an extension of time or determination related thereto shall be referred to or offered in evidence by the **Contractor** or its attorneys in any action or proceeding.

13.10 No Damage for Delay: The **Contractor** agrees to make no claim for damages for delay in the performance of this **Contract** occasioned by any act or omission to act of the **City** or any of its representatives, except as provided for in Article 11.

#### **ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK**

14.1 Date for **Substantial Completion**: The **Contractor** shall substantially complete the **Work** within the time fixed in Schedule A of the General Conditions, or within the time to which such **Substantial Completion** may be extended.

14.2 Determining the Date of **Substantial Completion**: The **Work** will be deemed to be substantially complete when the two conditions set forth below have been met.

14.2.1 Inspection: The **Engineer** has inspected the **Work** and has made a written determination that it is substantially complete.

14.2.2 Approval of **Final Approved Punch List** and Date for **Final Acceptance**: Following inspection of the **Work**, the **Engineer** shall furnish the **Contractor** with a final punch list, specifying all items of **Work** to be completed and proposing dates for the completion of each specified item of **Work**. The **Contractor** shall then submit in writing to the **Engineer** within ten (10) **Days** of the **Engineer** furnishing the final punch list either acceptance of the dates or proposed alternative dates for the completion of each specified item of **Work**. If the **Contractor** proposes alternative dates, then, within a reasonable time after receipt, the **Engineer**, in a written notification to the **Contractor**, shall approve the **Contractor's** completion dates or, if they are unable to agree, the **Engineer** shall establish dates for the completion of each item of **Work**. If the **Contractor** neither accepts the dates nor proposes alternative dates within ten (10) **Days**, the schedule proposed by the **Engineer** shall be deemed accepted. The latest completion date specified shall be the date for **Final Acceptance** of the **Work**.

14.3 Date of **Substantial Completion**. The date of approval of the **Final Approved Punch List**, shall be the date of **Substantial Completion**. The date of approval of the **Final Approved Punch List** shall be either (a) if the **Contractor** approves the final punch list and proposed dates for completion furnished by the **Engineer**, the date of the **Contractor's** approval; or (b) if the **Contractor** neither accepts the dates nor proposes alternative dates, ten (10) **Days** after the **Engineer** furnishes the **Contractor** with a final punch list and proposed dates for completion; or (c) if the **Contractor** proposes alternative dates, the date that the **Engineer** sends written notification to the **Contractor** either approving the **Contractor's** proposed alternative dates or establishing dates for the completion for each item of **Work**.

14.4 Determining the Date of **Final Acceptance**: The **Work** will be accepted as final and complete as of the date of the **Engineer's** inspection if, upon such inspection, the **Engineer** finds that all items on the **Final Approved Punch List** are complete and no further **Work** remains to be done. The **Commissioner** will then issue a written determination of **Final Acceptance**.

14.5 Request for Inspection: Inspection of the **Work** by the **Engineer** for the purpose of **Substantial Completion** or **Final Acceptance** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.6 Request for Re-inspection: If upon inspection for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer** determines that there are items of **Work** still to be performed, the **Contractor** shall promptly perform them and then request a re-inspection. If upon re-inspection, the **Engineer** determines that the **Work** is substantially complete or finally accepted, the date of such re-inspection shall be the date of **Substantial Completion** or **Final Acceptance**. Re-inspection by the **Engineer** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.7 Initiation of Inspection by the **Engineer**: If the **Contractor** does not request inspection or re-inspection of the **Work** for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer** may initiate such inspection or re-inspection.

#### ARTICLE 15. LIQUIDATED DAMAGES

15.1 In the event the **Contractor** fails to substantially complete the **Work** within the time fixed for such **Substantial Completion** in Schedule A of the General Conditions, plus authorized time extensions, or if the **Contractor**, in the sole determination of the **Commissioner**, has abandoned the **Work**, the **Contractor** shall pay to the **City** the sum fixed in Schedule A of the General Conditions, for each and every **Day** that the time consumed in substantially completing the **Work** exceeds the time allowed therefor; which said sum, in view of the difficulty of accurately ascertaining the loss which the **City** will suffer by reason of delay in the **Substantial Completion** of the **Work** hereunder, is hereby fixed and agreed as the liquidated damages that the **City** will suffer by reason of such delay, and not as a penalty. This Article 15 shall also apply to the **Contractor** whether or not the **Contractor** is defaulted pursuant to Chapter X of this **Contract**. Neither the failure to assess liquidated damages nor the granting of any time extension shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

15.2 Liquidated damages received hereunder are not intended to be nor shall they be treated as either a partial or full waiver or discharge of the **City's** right to indemnification, or the **Contractor's** obligation to indemnify the **City**, or to any other remedy provided for in this **Contract** or by **Law**.

15.3 The **Commissioner** may deduct and retain out of the monies which may become due hereunder, the amount of any such liquidated damages; and in case the amount which may become due hereunder shall be less than the amount of liquidated damages suffered by the **City**, the **Contractor** shall be liable to pay the difference.

#### ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION

16.1 Unless otherwise provided for in the **Specifications**, the **Commissioner** may take over, use, occupy or operate any part of the **Work** at any time prior to **Final Acceptance**, upon written notification to the **Contractor**. The **Engineer** shall inspect the part of the **Work** to be taken over, used, occupied, or operated, and will furnish the **Contractor** with a written statement of the **Work**, if any, which remains to be performed on such part. The **Contractor** shall not object to, nor interfere with, the **Commissioner's** decision to exercise the rights granted by Article 16. In the event the **Commissioner** takes over, uses, occupies, or operates any part of the **Work**:

16.1.1 the **Engineer** shall issue a written determination of **Substantial Completion** with respect to such part of the **Work**;



16.1.2 the **Contractor** shall be relieved of its absolute obligation to protect such part of the unfinished **Work** in accordance with Article 7;

16.1.3 the **Contractor's** guarantee on such part of the **Work** shall begin on the date of such use by the **City**; and;

16.1.4 the **Contractor** shall be entitled to a return of so much of the amount retained in accordance with Article 21 as it relates to such part of the **Work**, except so much thereof as may be retained under Articles 24 and 44.

#### CHAPTER IV SUBCONTRACTS AND ASSIGNMENTS

##### ARTICLE 17. SUBCONTRACTS

17.1 The **Contractor** shall not make subcontracts totaling an amount more than the percentage of the total **Contract** price fixed in Schedule A of the General Conditions, without prior written permission from the **Commissioner**. All subcontracts made by the **Contractor** shall be in writing. No **Work** may be performed by a **Subcontractor** prior to the **Contractor** entering into a written subcontract with the **Subcontractor** and complying with the provisions of this Article 17.

17.2 Before making any subcontracts, the **Contractor** shall submit a written statement to the **Commissioner** giving the name and address of the proposed **Subcontractor**; the portion of the **Work** and materials which it is to perform and furnish; the cost of the subcontract; the VENDEX questionnaire if required; the proposed subcontract if requested by the **Commissioner**; and any other information tending to prove that the proposed **Subcontractor** has the necessary facilities, skill, integrity, past experience, and financial resources to perform the **Work** in accordance with the terms and conditions of this **Contract**.

17.3 In addition to the requirements in Article 17.2, **Contractor** is required to list the **Subcontractor** in the web based Subcontractor Reporting System through the City's Payee Information Portal (PIP), available at [www.nyc.gov/pip](http://www.nyc.gov/pip).<sup>1</sup> For each **Subcontractor** listed, **Contractor** is required to provide the following information: maximum contract value, description of **Subcontractor's** **Work**, start and end date of the subcontract and identification of the **Subcontractor's** industry. Thereafter, **Contractor** will be required to report in the system the payments made to each **Subcontractor** within 30 days of making the payment. If any of the required information changes throughout the Term of the **Contract**, **Contractor** will be required to revise the information in the system.

Failure of the **Contractor** to list a **Subcontractor** and/or to report **Subcontractor** payments in a timely fashion may result in the **Commissioner** declaring the **Contractor** in default of the **Contract** and will subject **Contractor** to liquidated damages in the amount of \$100 per day for each day that the **Contractor** fails to identify a **Subcontractor** along with the required information about the **Subcontractor** and/or fails to report payments to a **Subcontractor**, beyond the time frames set forth herein or in the notice from the **City**. Article 15 shall govern the issue of liquidated damages.

---

<sup>1</sup> In order to use the new system, a PIP account will be required. Detailed instructions on creating a PIP account and using the new system are also available at [www.nyc.gov/pip](http://www.nyc.gov/pip). Additional assistance with PIP may be obtained by emailing the Financial Information Services Agency Help Desk at [pip@fisa.nyc.gov](mailto:pip@fisa.nyc.gov).

17.4 If an approved **Subcontractor** elects to subcontract any portion of its subcontract, the proposed sub-subcontract shall be submitted in the same manner as directed above.

17.5 The **Commissioner** will notify the **Contractor** in writing whether the proposed **Subcontractor** is approved. If the proposed **Subcontractor** is not approved, the **Contractor** may submit another proposed **Subcontractor** unless the **Contractor** decides to do the **Work**. No **Subcontractor** shall be permitted to enter or perform any work on the **Site** unless approved.

17.6 Before entering into any subcontract hereunder, the **Contractor** shall provide the proposed **Subcontractor** with a complete copy of this document and inform the proposed **Subcontractor** fully and completely of all provisions and requirements of this **Contract** relating either directly or indirectly to the **Work** to be performed and the materials to be furnished under such subcontract, and every such **Subcontractor** shall expressly stipulate that all labor performed and materials furnished by the **Subcontractor** shall strictly comply with the requirements of this **Contract**.

17.7 Documents given to a prospective **Subcontractor** for the purpose of soliciting the **Subcontractor's** bid shall include either a copy of the bid cover or a separate information sheet setting forth the **Project** name, the **Contract** number (if available), the **Agency** (as noted in Article 2.1.6), and the **Project's** location.

17.8 The **Commissioner's** approval of a **Subcontractor** shall not relieve the **Contractor** of any of its responsibilities, duties, and liabilities hereunder. The **Contractor** shall be solely responsible to the **City** for the acts or defaults of its **Subcontractor** and of such **Subcontractor's** officers, agents, and employees, each of whom shall, for this purpose, be deemed to be the agent or employee of the **Contractor** to the extent of its subcontract.

17.9 If the **Subcontractor** fails to maintain the necessary facilities, skill, integrity, past experience, and financial resources (other than due to the **Contractor's** failure to make payments where required) to perform the **Work** in accordance with the terms and conditions of this **Contract**, the **Contractor** shall promptly notify the **Commissioner** and replace such **Subcontractor** with a newly approved **Subcontractor** in accordance with this Article 17.

17.10 The **Contractor** shall be responsible for ensuring that all **Subcontractors** performing **Work** at the **Site** maintain all insurance required by **Law**.

17.11 The **Contractor** shall promptly, upon request, file with the **Engineer** a conformed copy of the subcontract and its cost. The subcontract shall provide the following:

17.11.1 Payment to **Subcontractors**: The agreement between the **Contractor** and its **Subcontractor** shall contain the same terms and conditions as to method of payment for **Work**, labor, and materials, and as to retained percentages, as are contained in this **Contract**.

17.11.2 Prevailing Rate of Wages: The agreement between the **Contractor** and its **Subcontractor** shall include the prevailing wage rates and supplemental benefits to be paid in accordance with Labor Law Section 220.

17.11.3 Section 6-123 of the Administrative Code: Pursuant to the requirements of Section 6-123 of the Administrative Code, every agreement between the **Contractor** and a **Subcontractor** in excess of fifty thousand (\$50,000) dollars shall include a provision that the **Subcontractor** shall not engage in any unlawful discriminatory practice as defined in Title VIII of the Administrative Code (Section 8-10) *et seq.*

17.11.4 All requirements required pursuant to federal and/or state grant agreement(s), if applicable to the **Work**.

17.12 The **Commissioner** may deduct from the amounts certified under this **Contract** to be due to the **Contractor**, the sum or sums due and owing from the **Contractor** to the **Subcontractors** according to the terms of the said subcontracts, and in case of dispute between the **Contractor** and its **Subcontractor**, or **Subcontractors**, as to the amount due and owing, the **Commissioner** may deduct and withhold from the amounts certified under this **Contract** to be due to the **Contractor** such sum or sums as may be claimed by such **Subcontractor**, or **Subcontractors**, in a sworn affidavit, to be due and owing until such time as such claim or claims shall have been finally resolved.

17.13 On contracts where performance bonds and payment bonds are executed, the **Contractor** shall include on each requisition for payment the following data: **Subcontractor's** name, value of the subcontract, total amount previously paid to **Subcontractor** for **Work** previously requisitioned, and the amount, including retainage, to be paid to the **Subcontractor** for **Work** included in the requisition.

17.14 On **Contracts** where performance bonds and payment bonds are not executed, the **Contractor** shall include with each requisition for payment submitted hereunder, a signed statement from each and every **Subcontractor** and/or **Materialman** for whom payment is requested in such requisition. Such signed statement shall be on the letterhead of the **Subcontractor** and/or **Materialman** for whom payment is requested and shall (i) verify that such **Subcontractor** and/or **Materialman** has been paid in full for all **Work** performed and/or material supplied to date, exclusive of any amount retained and any amount included on the current requisition, and (ii) state the total amount of retainage to date, exclusive of any amount retained on the current requisition.

## ARTICLE 18. ASSIGNMENTS

18.1 The **Contractor** shall not assign, transfer, convey or otherwise dispose of this **Contract**, or the right to execute it, or the right, title or interest in or to it or any part thereof, or assign, by power of attorney or otherwise any of the monies due or to become due under this **Contract**, unless the previous written consent of the **Commissioner** shall first be obtained thereto, and the giving of any such consent to a particular assignment shall not dispense with the necessity of such consent to any further or other assignments.

18.2 Such assignment, transfer, conveyance or other disposition of this **Contract** shall not be valid until filed in the office of the **Commissioner** and the **Comptroller**, with the written consent of the **Commissioner** endorsed thereon or attached thereto.

18.3 Failure to obtain the previous written consent of the **Commissioner** to such an assignment, transfer, conveyance or other disposition, may result in the revocation and annulment of this **Contract**. The **City** shall thereupon be relieved and discharged from any further liability to the **Contractor**, its assignees, transferees or sublessees, who shall forfeit and lose all monies therefor earned under the **Contract**, except so much as may be required to pay the **Contractor's** employees.

18.4 The provisions of this clause shall not hinder, prevent, or affect an assignment by the **Contractor** for the benefit of its creditors made pursuant to the **Laws** of the State of New York.

18.5 This **Contract** may be assigned by the **City** to any corporation, agency or instrumentality having authority to accept such assignment.

CHAPTER V  
CONTRACTOR'S SECURITY AND GUARANTEE

ARTICLE 19. SECURITY DEPOSIT

19.1 If performance and payment bonds are required, the City shall retain the bid security to ensure that the successful bidder executes the **Contract** and furnishes the required payment and performance security within ten (10) Days after notice of the award of the **Contract**. If the successful bidder fails to execute the **Contract** and furnish the required payment and performance security, the City shall retain such bid security as set forth in the Information for Bidders. If the successful bidder executes the **Contract** and furnishes the required payment and performance security, the City shall return the bid security within a reasonable time after the furnishing of such bonds and execution of the **Contract** by the City.

19.2 If performance and payment bonds are not required, the bid security shall be retained by the City as security for the Contractor's faithful performance of the **Contract**. If partial payments are provided, the bid security will be returned to the Contractor after the sum retained under Article 21 equals the amount of the bid security, subject to other provisions of this **Contract**. If partial payments are not provided, the bid security will be released when final payment is certified by the City for payment.

19.3 If the Contractor is declared in default under Article 48 prior to the return of the deposit, or if any claim is made such as referred to in Article 23, the amount of such deposit, or so much thereof as the Comptroller may deem necessary, may be retained and then applied by the Comptroller:

19.3.1 To compensate the City for any expense, loss or damage suffered or incurred by reason of or resulting from such default, including the cost of re-letting and liquidated damages; or

19.3.2 To indemnify the City against any and all claims.

ARTICLE 20. PAYMENT GUARANTEE

20.1 On Contracts where one hundred (100%) percent performance bonds and payment bonds are executed, this Article 20 does not apply.

20.2 In the event the terms of this **Contract** do not require the Contractor to provide a payment bond or where the **Contract** does not require a payment bond for one hundred (100%) percent of the **Contract** price, the City shall, in accordance with the terms of this Article 20, guarantee payment of all lawful claims for:

20.2.1 Wages and compensation for labor performed and/or services rendered; and

20.2.2 Materials, equipment, and supplies provided, whether incorporated into the **Work** or not, when demands have been filed with the City as provided hereinafter by any person, firm, or corporation which furnished labor, material, equipment, supplies, or any combination thereof, in connection with the **Work** performed hereunder (hereinafter referred to as the "beneficiary") at the direction of the City or the Contractor.

20.3 The provisions of Article 20.2 are subject to the following limitations and conditions:

20.3.1 If the **Contractor** provides a payment bond for a value that is less than one hundred (100%) percent of the value of the **Contract Work**, the payment bond provided by the **Contractor** shall be primary (and non-contributing) to the payment guarantee provided under this Article 20.

20.3.2 The guarantee is made for the benefit of all beneficiaries as defined in Article 20.2 provided that those beneficiaries strictly adhere to the terms and conditions of Article 20.3.4 and 20.3.5.

20.3.3 Nothing in this Article 20 shall prevent a beneficiary providing labor, services or material for the **Work** from suing the **Contractor** for any amounts due and owing the beneficiary by the **Contractor**.

20.3.4 Every person who has furnished labor or material, to the **Contractor** or to a **Subcontractor** of the **Contractor**, in the prosecution of the **Work** and who has not been paid in full therefor before the expiration of a period of ninety (90) **Days** after the date on which the last of the labor was performed or material was furnished by him/her for which the claim is made, shall have the right to sue on this payment guarantee in his/her own name for the amount, or the balance thereof, unpaid at the time of commencement of the action; provided, however, that a person having a direct contractual relationship with a **Subcontractor** of the **Contractor** but no contractual relationship express or implied with the **Contractor** shall not have a right of action upon the guarantee unless he/she shall have given written notice to the **Contractor** within one hundred twenty (120) **Days** from the date on which the last of the labor was performed or the last of the material was furnished, for which his/her claim is made, stating with substantial accuracy the amount claimed and the name of the party to whom the material was furnished or for whom the labor was performed. The notice shall be served by delivering the same personally to the **Contractor** or by mailing the same by registered mail, postage prepaid, in an envelope addressed to the **Contractor** at any place where it maintains an office or conducts its business; provided, however, that where such notice is actually received by the **Contractor** by other means, such notice shall be deemed sufficient.

20.3.5 Except as provided in Labor Law Section 220-g, no action on this payment guarantee shall be commenced after the expiration of the one-year limitations period set forth in Section 137(4)(b) of the State Finance Law.

20.3.6 The **Contractor** shall promptly forward to the **City** any notice or demand received pursuant to Article 20.3.4. The **Contractor** shall inform the **City** of any defenses to the notice or demand and shall forward to the **City** any documents the **City** requests concerning the notice or demand.

20.3.7 All demands made against the **City** by a beneficiary of this payment guarantee shall be presented to the **Engineer** along with all written documentation concerning the demand which the **Engineer** deems reasonably appropriate or necessary, which may include, but shall not be limited to: the subcontract; any invoices presented to the **Contractor** for payment; the notarized statement of the beneficiary that the demand is due and payable, that a request for payment has been made of the **Contractor** and that the demand has not been paid by the **Contractor** within the time allowed for such payment by the subcontract; and copies of any correspondence between the beneficiary and the **Contractor** concerning such demand. The **City** shall notify the **Contractor** that a demand has been made. The **Contractor** shall inform the **City** of any defenses to the demand and shall forward to the **City** any documents the **City** requests concerning the demand.

20.3.8 The **City** shall make payment only if, after considering all defenses presented by the **Contractor**, it determines that the payment is due and owing to the beneficiary making the demand.

20.3.9 No beneficiary shall be entitled to interest from the **City**, or to any other costs, including, but not limited to, attorneys' fees, except to the extent required by State Finance Law Section 137.

20.4 Upon the receipt by the **City** of a demand pursuant to this Article 20, the **City** may withhold from any payment otherwise due and owing to the **Contractor** under this **Contract** an amount sufficient to satisfy the demand.

20.4.1 In the event the **City** determines that the demand is valid, the **City** shall notify the **Contractor** of such determination and the amount thereof and direct the **Contractor** to immediately pay such amount to the beneficiary. In the event the **Contractor**, within seven (7) **Days** of receipt of such notification from the **City**, fails to pay the beneficiary, such failure shall constitute an automatic and irrevocable assignment of payment by the **Contractor** to the beneficiary for the amount of the demand determined by the **City** to be valid. The **Contractor**, without further notification or other process, hereby gives its unconditional consent to such assignment of payment to the beneficiary and authorizes the **City**, on its behalf, to take all necessary actions to implement such assignment of payment, including without limitation the execution of any instrument or documentation necessary to effectuate such assignment.

20.4.2 In the event that the amount otherwise due and owing to the **Contractor** by the **City** is insufficient to satisfy such demand, the **City** may, at its option, require payment from the **Contractor** of an amount sufficient to cover such demand and exercise any other right to require or recover payment which the **City** may have under **Law** or **Contract**.

20.4.3 In the event the **City** determines that the demand is invalid, any amount withheld pending the **City's** review of such demand shall be paid to the **Contractor**; provided, however, no lien has been filed. In the event a claim or an action has been filed, the terms and conditions set forth in Article 23 shall apply. In the event a lien has been filed, the parties will be governed by the provisions of the Lien Law of the State of New York.

20.5 The provisions of this Article 20 shall not prevent the **City** and the **Contractor** from resolving disputes in accordance with the **PPB** Rules, where applicable.

20.6 In the event the **City** determines that the beneficiary is entitled to payment pursuant to this Article 20, such determination and any defenses and counterclaims raised by the **Contractor** shall be taken into account in evaluating the **Contractor's** performance.

20.7 Nothing in this Article 20 shall relieve the **Contractor** of the obligation to pay the claims of all persons with valid and lawful claims against the **Contractor** relating to the **Work**.

20.8 The **Contractor** shall not require any performance, payment or other bonds of any **Subcontractor** if this **Contract** does not require such bonds of the **Contractor**.

20.9 The payment guarantee made pursuant to this Article 20 shall be construed in a manner consistent with Section 137 of the State Finance Law and shall afford to persons furnishing labor or materials to the **Contractor** or its **Subcontractors** in the prosecution of the **Work** under this **Contract** all of the rights and remedies afforded to such persons by such section, including but not limited to, the right

to commence an action against the City on the payment guarantee provided by this Article 20 within the one-year limitations period set forth in Section 137(4)(b).

#### ARTICLE 21. RETAINED PERCENTAGE

21.1 If this **Contract** requires one hundred (100%) percent performance and payment security, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.2 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded does not exceed one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.3 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded exceeds one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, up to ten (10%) percent of the value of **Work** certified for payment in each partial payment voucher. The percentage to be retained is set forth in Schedule A of the General Conditions.

#### ARTICLE 22. INSURANCE

22.1 Types of Insurance: The **Contractor** shall procure and maintain the following types of insurance if, and as indicated, in Schedule A of the General Conditions (with the minimum limits and special conditions specified in Schedule A). Such insurance shall be maintained from the date the **Contractor** is required to provide Proof of Insurance pursuant to Article 22.3.1 through the date of completion of all required **Work** (including punch list work as certified in writing by the **Resident Engineer**), except for insurance required pursuant to Article 22.1.4, which may terminate upon **Substantial Completion** of the **Contract**. All insurance shall meet the requirements set forth in this Article 22. Wherever this Article requires that insurance coverage be "at least as broad" as a specified form (including all ISO forms), there is no obligation that the form itself be used, provided that the **Contractor** can demonstrate that the alternative form or endorsement contained in its policy provides coverage at least as broad as the specified form.

22.1.1 Commercial General Liability Insurance: The **Contractor** shall provide Commercial General Liability Insurance covering claims for property damage and/or bodily injury, including death, which may arise from any of the operations under this **Contract**. Coverage under this insurance shall be at least as broad as that provided by the latest edition of Insurance Services Office ("ISO") Form CG 0001. Such insurance shall be "occurrence" based rather than "claims-made" and include, without limitation, the following types of coverage: premises operations; products and completed operations; contractual liability (including the tort liability of another assumed in a contract); broad form property damage; independent contractors; explosion, collapse and underground (XCU); construction means and methods; and incidental malpractice. Such insurance shall contain a "per project" aggregate limit, as specified in Schedule A, that applies separately to operations under this **Contract**.

22.1.1(a) Such Commercial General Liability Insurance shall name the **City** as an Additional Insured. Coverage for the **City** shall specifically include the **City's** officials and employees, be at least as broad as the latest edition of ISO Form CG 20 10 and provide completed operations coverage at least as broad as the latest edition of ISO Form CG 20 37.

22.1.1(b) Such Commercial General Liability Insurance shall name all other entities designated as additional insureds in Schedule A but only for claims arising from the **Contractor's** operations under this **Contract**, with coverage at least as broad as the latest edition of ISO Form CG 20 26.

22.1.1(c) If the **Work** requires a permit from the Department of Buildings pursuant to 1 RCNY Section 101-08, at [http://www.nyc.gov/html/dob/downloads/rules/1\\_RCNY\\_101-08.pdf](http://www.nyc.gov/html/dob/downloads/rules/1_RCNY_101-08.pdf), the **Contractor** shall provide Commercial General Liability Insurance with limits of at least those required by 1 RCNY section 101-08. If the **Work** does not require such a permit, the minimum limits shall be those provided for in Schedule A.

22.1.1(d) If any of the **Work** includes repair of a waterborne vessel owned by or to be delivered to the **City**, such Commercial General Liability shall include, or be endorsed to include, Ship Repairer's Legal Liability Coverage to protect against, without limitation, liability arising from navigation of such vessels prior to delivery to and acceptance by the **City**.

22.1.2 Workers' Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance: The **Contractor** shall provide, and shall cause its **Subcontractors** to provide, Workers Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance in accordance with the **Laws** of the State of New York on behalf of all employees providing services under this **Contract** (except for those employees, if any, for which the **Laws** require insurance only pursuant to Article 22.1.3).

22.1.3 United States Longshoremen's and Harbor Workers Act and/or Jones Act Insurance: If specified in Schedule A of the General Conditions or if required by **Law**, the **Contractor** shall provide insurance in accordance with the United States Longshoremen's and Harbor Workers Act and/or the Jones Act, on behalf of all qualifying employees providing services under this **Contract**.

22.1.4 Builders Risk Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall provide Builders Risk Insurance on a completed value form for the total value of the **Work** through **Substantial Completion** of the **Work** in its entirety. Such insurance shall be provided on an All Risk basis and include coverage, without limitation, for windstorm (including named windstorm), storm surge, flood and earth movement. Unless waived by the **Commissioner**, it shall include coverage for ordinance and law, demolition and increased costs of construction, debris removal, pollutant clean up and removal, and expediting costs. Such insurance shall cover, without limitation, (a) all buildings and/or structures involved in the **Work**, as well as temporary structures at the **Site**, and (b) any property that is intended to become a permanent part of such building or structure, whether such property is on the **Site**, in transit or in temporary storage. Policies shall name the **Contractor** as Named Insured and list the **City** as both an Additional Insured and a Loss Payee as its interest may appear.

22.1.4(a) Policies of such insurance shall specify that, in the event a loss occurs at an occupied facility, occupancy of such facility is permitted without the consent of the issuing insurance company.



22.1.4(b) Such insurance may be provided through an Installation Floater, at the **Contractor's** option, if it otherwise conforms with the requirements of this Article 22.1.4.

22.1.5 **Commercial Automobile Liability Insurance:** The **Contractor** shall provide Commercial Automobile Liability Insurance for liability arising out of ownership, maintenance or use of any owned (if any), non-owned and hired vehicles to be used in connection with this **Contract**. Coverage shall be at least as broad as the latest edition of ISO Form CA0001. If vehicles are used for transporting hazardous materials, the Automobile Liability Insurance shall be endorsed to provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90.

22.1.6 **Contractors Pollution Liability Insurance:** If specified in Schedule A of the General Conditions, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Contractors Pollution Liability Insurance covering bodily injury and property damage. Such insurance shall provide coverage for actual, alleged or threatened emission, discharge, dispersal, seepage, release or escape of pollutants (including asbestos), including any loss, cost or expense incurred as a result of any cleanup of pollutants (including asbestos) or in the investigation, settlement or defense of any claim, action, or proceedings arising from the operations under this **Contract**. Such insurance shall be in the **Contractor's** name and list the **City** as an Additional Insured and any other entity specified in Schedule A. Coverage shall include, without limitation, (a) loss of use of damaged property or of property that has not been physically injured, (b) transportation, and (c) non-owned disposal sites.

22.1.6(a) Coverage for the **City** as Additional Insured shall specifically include the **City's** officials and employees and be at least as broad as provided to the **Contractor** for this **Project**.

22.1.6(b) If such insurance is written on a claims-made policy, such policy shall have a retroactive date on or before the effective date of this **Contract**, and continuous coverage shall be maintained, or an extended discovery period exercised, for a period of not less than three (3) years from the time the **Work** under this **Contract** is completed.

22.1.7 **Marine Insurance:**

22.1.7(a) **Marine Protection and Indemnity Insurance:** If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Marine Protection and Indemnity Insurance with coverage at least as broad as Form SP-23. The insurance shall provide coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured for bodily injury and property damage arising from marine operations under this **Contract**. Coverage shall include, without limitation, injury or death of crew members (if not fully provided through other insurance), removal of wreck, damage to piers, wharves and other fixed or floating objects and loss of or damage to any other vessel or craft, or to property on such other vessel or craft.

22.1.7(b) **Hull and Machinery Insurance:** If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Hull and Machinery Insurance with coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) as Additional Insured at least as broad as the latest edition of American Institute Tug Form for all tugs used under this **Contract** and Collision Liability at least as broad as the latest edition of American Institute Hull Clauses.

22.1.7(c) **Marine Pollution Liability Insurance:** If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Marine Pollution Liability Insurance covering itself (or the **Subcontractor** doing such **Work**) as Named Insured and the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured. Coverage shall be at least as broad as that provided by the latest edition of Water Quality Insurance Syndicate Form and include, without limitation, liability arising from the discharge or substantial threat of a discharge of oil, or from the release or threatened release of a hazardous substance including injury to, or economic losses resulting from, the destruction of or damage to real property, personal property or natural resources.

22.1.8 The **Contractor** shall provide such other types of insurance, at such minimum limits and with such conditions, as are specified in Schedule A of the General Conditions.

## 22.2 General Requirements for Insurance Coverage and Policies:

22.2.1 All required insurance policies shall be maintained with companies that may lawfully issue the required policy and have an A.M. Best rating of at least A-/VII or a Standard and Poor's rating of at least A, unless prior written approval is obtained from the **City Corporation Counsel**.

22.2.2 The **Contractor** shall be solely responsible for the payment of all premiums for all required policies and all deductibles and self-insured retentions to which such policies are subject, whether or not the **City** is an insured under the policy.

22.2.3 In his/her sole discretion, the **Commissioner** may, subject to the approval of the **Comptroller** and the **City Corporation Counsel**, accept Letters of Credit and/or custodial accounts in lieu of required insurance.

22.2.4 The **City's** limits of coverage for all types of insurance required pursuant to Schedule A of the General Conditions shall be the greater of (i) the minimum limits set forth in Schedule A or (ii) the limits provided to the **Contractor** as Named Insured under all primary, excess, and umbrella policies of that type of coverage.

22.2.5 The **Contractor** may satisfy its insurance obligations under this Article 22 through primary policies or a combination of primary and excess/umbrella policies, so long as all policies provide the scope of coverage required herein.

22.2.6 Policies of insurance provided pursuant to this Article 22 shall be primary and non-contributing to any insurance or self-insurance maintained by the **City**.

### 22.3 Proof of Insurance:

22.3.1 For all types of insurance required by Article 22.1 and Schedule A, except for insurance required by Articles 22.1.4 and 22.1.7, the **Contractor** shall file proof of insurance in accordance with this Article 22.3 within ten (10) **Days** of award. For insurance provided pursuant to Articles 22.1.4 and 22.1.7, proof shall be filed by a date specified by the **Commissioner** or ten (10) **Days** prior to the commencement of the portion of the **Work** covered by such policy, whichever is earlier.

22.3.2 For Workers' Compensation Insurance provided pursuant to Article 22.1.2, the **Contractor** shall submit one of the following forms: C-105.2 Certificate of Workers' Compensation Insurance; U-26.3 - State Insurance Fund Certificate of Workers' Compensation Insurance; Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. For Disability Benefits Insurance provided pursuant to Article 22.1.2, the Contractor shall submit DB-120.1 - Certificate Of Insurance Coverage Under The NYS Disability Benefits Law, Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. ACORD forms are not acceptable.

22.3.3 For policies provided pursuant to all of Article 22.1 other than Article 22.1.2, the **Contractor** shall submit one or more Certificates of Insurance on forms acceptable to the **Commissioner**. All such Certificates of Insurance shall certify (a) the issuance and effectiveness of such policies of insurance, each with the specified minimum limits (b) for insurance secured pursuant to Article 22.1.1 that the **City** and any other entity specified in Schedule A is an Additional Insured with coverage at least as broad as the most recent edition of ISO Forms CG 20 10, CG 20 37, and CG 20 26, as applicable; (c) in the event insurance is required pursuant to Article 22.1.6 and/or Article 22.1.7, that the **City** is an Additional Insured thereunder; (d) the company code issued to the insurance company by the National Association of Insurance Commissioners (the NAIC number); and (e) the number assigned to the **Contract** by the **City**. All such Certificates of Insurance shall be accompanied by either a duly executed "Certification by Broker" in the form contained in Part III of Schedule A or copies of all policies referenced in such Certificate of Insurance as certified by an authorized representative of the issuing insurance carrier. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

22.3.4 Documentation confirming renewals of insurance shall be submitted to the **Commissioner** prior to the expiration date of coverage of policies required under this **Contract**. Such proofs of insurance shall comply with the requirements of Articles 22.3.2 and 22.3.3.

22.3.5 The **Contractor** shall be obligated to provide the **City** with a copy of any policy of insurance provided pursuant to this Article 22 upon the demand for such policy by the **Commissioner** or the **City** Corporation Counsel.

### 22.4 Operations of the Contractor:

22.4.1 The **Contractor** shall not commence the **Work** unless and until all required certificates have been submitted to and accepted by the **Commissioner**. Acceptance by the **Commissioner** of a certificate does not excuse the **Contractor** from securing insurance

consistent with all provisions of this Article 22 or of any liability arising from its failure to do so.

22.4.2 The **Contractor** shall be responsible for providing continuous insurance coverage in the manner, form, and limits required by this **Contract** and shall be authorized to perform **Work** only during the effective period of all required coverage.

22.4.3 In the event that any of the required insurance policies lapse, are revoked, suspended or otherwise terminated, for whatever cause, the **Contractor** shall immediately stop all **Work**, and shall not recommence **Work** until authorized in writing to do so by the **Commissioner**. Upon quitting the **Site**, except as otherwise directed by the **Commissioner**, the **Contractor** shall leave all plant, materials, equipment, tools, and supplies on the **Site**. **Contract** time shall continue to run during such periods and no extensions of time will be granted. The **Commissioner** may also declare the **Contractor** in default for failure to maintain required insurance.

22.4.4 In the event the **Contractor** receives notice, from an insurance company or other person, that any insurance policy required under this Article 22 shall be cancelled or terminated (or has been cancelled or terminated) for any reason, the **Contractor** shall immediately forward a copy of such notice to both the **Commissioner** and the New York City Comptroller, attn: Office of Contract Administration, Municipal Building, One Centre Street, room 1005, New York, New York 10007. Notwithstanding the foregoing, the **Contractor** shall ensure that there is no interruption in any of the insurance coverage required under this Article 22.

22.4.5 Where notice of loss, damage, occurrence, accident, claim or suit is required under an insurance policy maintained in accordance with this Article 22, the **Contractor** shall notify in writing all insurance carriers that issued potentially responsive policies of any such event relating to any operations under this **Contract** (including notice to Commercial General Liability insurance carriers for events relating to the **Contractor**'s own employees) no later than 20 days after such event. For any policy where the **City** is an Additional Insured, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Insured as well as the Named Insured." Such notice shall also contain the following information: the number of the insurance policy, the name of the named insured, the date and location of the damage, occurrence, or accident, and the identity of the persons or things injured, damaged or lost. The **Contractor** shall simultaneously send a copy of such notice to the City of New York c/o Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

22.4.6 In the event of any loss, accident, claim, action, or other event that does or can give rise to a claim under any insurance policy required under this Article 22, the **Contractor** shall at all times fully cooperate with the **City** with regard to such potential or actual claim.

22.5 **Subcontractor Insurance:** In the event the **Contractor** requires any **Subcontractor** to procure insurance with regard to any operations under this **Contract** and requires such **Subcontractor** to name the **Contractor** as an **Additional Insured** thereunder, the **Contractor** shall ensure that the **Subcontractor** name the **City**, including its officials and employees, as an **Additional Insured** with coverage at least as broad as the most recent edition of ISO Form CG 20 26.

22.6 Wherever reference is made in Article 7 or this Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth in Schedule A of the General Conditions. In the event no address is set forth in Schedule A, such documents are to be sent to the **Commissioner**'s address as provided elsewhere in this **Contract**.

22.7 Apart from damages or losses covered by insurance provided pursuant to Articles 22.1.2, 22.1.3, or 22.1.5, the **Contractor** waives all rights against the **City**, including its officials and employees, for any damages or losses that are covered under any insurance required under this Article 22 (whether or not such insurance is actually procured or claims are paid thereunder) or any other insurance applicable to the operations of the **Contractor** and/or its employees, agents, or **Subcontractors**.

22.8 In the event the **Contractor** utilizes a self-insurance program to satisfy any of the requirements of this Article 22, the **Contractor** shall ensure that any such self-insurance program provides the **City** with all rights that would be provided by traditional insurance under this Article 22, including but not limited to the defense and indemnification obligations that insurers are required to undertake in liability policies.

22.9 Materiality/Non-Waiver: The **Contractor's** failure to secure policies in complete conformity with this Article 22, or to give an insurance company timely notice of any sort required in this **Contract** or to do anything else required by this Article 22 shall constitute a material breach of this **Contract**. Such breach shall not be waived or otherwise excused by any action or inaction by the **City** at any time.

22.10 Pursuant to General Municipal Law Section 108, this **Contract** shall be void and of no effect unless **Contractor** maintains Workers' Compensation Insurance for the term of this **Contract** to the extent required and in compliance with the New York State Workers' Compensation Law.

22.11 Other Remedies: Insurance coverage provided pursuant to this Article 22 or otherwise shall not relieve the **Contractor** of any liability under this **Contract**, nor shall it preclude the **City** from exercising any rights or taking such other actions available to it under any other provisions of this **Contract** or **Law**.

### ARTICLE 23. MONEY RETAINED AGAINST CLAIMS

23.1 If any claim shall be made by any person or entity (including **Other Contractors** with the **City** on this **Project**) against the **City** or against the **Contractor** and the **City** for any of the following:

- (a) An alleged loss, damage, injury, theft or vandalism of any of the kinds referred to in Articles 7 and 12, plus the reasonable costs of defending the **City**, which in the opinion of the **Comptroller** may not be paid by an insurance company (for any reason whatsoever); or
- (b) An infringement of copyrights, patents or use of patented articles, tools, etc., as referred to in Article 57; or
- (c) Damage claimed to have been caused directly or indirectly by the failure of the **Contractor** to perform the **Work** in strict accordance with this **Contract**,

the amount of such claim, or so much thereof as the **Comptroller** may deem necessary, may be withheld by the **Comptroller**, as security against such claim, from any money due hereunder. The **Comptroller**, in his/her discretion, may permit the **Contractor** to substitute other satisfactory security in lieu of the monies so withheld.

23.2 If an action on such claim is timely commenced and the liability of the **City**, or the **Contractor**, or both, shall have been established therein by a final judgment of a court of competent jurisdiction, or if such claim shall have been admitted by the **Contractor** to be valid, the **Comptroller**

shall pay such judgment or admitted claim out of the monies retained by the **Comptroller** under the provisions of this Article 23, and return the balance, if any, without interest, to the **Contractor**.

#### ARTICLE 24. MAINTENANCE AND GUARANTY

24.1 The **Contractor** shall promptly repair, replace, restore or rebuild, as the **Commissioner** may determine, any finished **Work** in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of **Substantial Completion** (or use and occupancy in accordance with Article 16), except where other periods of maintenance and guaranty are provided for in Schedule A.

24.2 As security for the faithful performance of its obligations hereunder, the **Contractor**, upon filing its requisition for payment on **Substantial Completion**, shall deposit with the **Commissioner** a sum equal to one (1%) percent of the price (or the amount fixed in Schedule A of the General Conditions) in cash or certified check upon a state or national bank and trust company or a check of such bank and trust company signed by a duly authorized officer thereof and drawn to the order of the **Comptroller**, or obligations of the **City**, which the **Comptroller** may approve as of equal value with the sum so required.

24.3 In lieu of the above, the **Contractor** may make such security payment to the **City** by authorizing the **Commissioner** in writing to deduct the amount from the **Substantial Completion** payment which shall be deemed the deposit required above.

24.4 If the **Contractor** has faithfully performed all of its obligations hereunder the **Commissioner** shall so certify to the **Comptroller** within five (5) **Days** after the expiration of one (1) year from the date of **Substantial Completion** and acceptance of the **Work** or within thirty (30) **Days** after the expiration of the guarantee period fixed in the **Specifications**. The security payment shall be repaid to the **Contractor** without interest within thirty (30) **Days** after certification by the **Commissioner** to the **Comptroller** that the **Contractor** has faithfully performed all of its obligations hereunder.

24.5 Notice by the **Commissioner** to the **Contractor** to repair, replace, rebuild or restore such defective or damaged **Work** shall be timely, pursuant to this article, if given not later than ten (10) **Days** subsequent to the expiration of the one (1) year period or other periods provided for herein.

24.6 If the **Contractor** shall fail to repair, replace, rebuild or restore such defective or damaged **Work** promptly after receiving such notice, the **Commissioner** shall have the right to have the **Work** done by others in the same manner as provided for in the completion of a defaulted **Contract**, under Article 51.

24.7 If the security payment so deposited is insufficient to cover the cost of such **Work**, the **Contractor** shall be liable to pay such deficiency on demand by the **Commissioner**.

24.8 The **Engineer's** certificate setting forth the fair and reasonable cost of repairing, replacing, rebuilding or restoring any damaged or defective **Work** when performed by one other than the **Contractor**, shall be binding and conclusive upon the **Contractor** as to the amount thereof.

24.9 The **Contractor** shall obtain all manufacturers' warranties and guaranties of all equipment and materials required by this **Contract** in the name of the **City** and shall deliver same to the **Commissioner**. All of the **City's** rights and title and interest in and to said manufacturers' warranties and guaranties may be assigned by the **City** to any subsequent purchasers of such equipment and materials or lessees of the premises into which the equipment and materials have been installed.

**CHAPTER VI  
CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM**

**ARTICLE 25. CHANGES**

25.1 Changes may be made to this **Contract** only as duly authorized in writing by the **Commissioner** in accordance with the **Law** and this **Contract**. All such changes, modifications, and amendments will become a part of the **Contract**. **Work** so ordered shall be performed by the **Contractor**.

25.2 **Contract** changes will be made only for **Work** necessary to complete the **Work** included in the original scope of the **Contract** and/or for non-material changes to the scope of the **Contract**. Changes are not permitted for any material alteration in the scope of **Work** in the **Contract**.

25.3 The **Contractor** shall be entitled to a price adjustment for **Extra Work** performed pursuant to a written change order. Adjustments to price shall be computed in one or more of the following ways:

25.3.1 By applicable unit prices specified in the **Contract**; and/or

25.3.2 By agreement of a fixed price; and/or

25.3.3 By time and material records; and/or

25.3.4 In any other manner approved by the **CCPO**.

25.4 All payments for change orders are subject to pre-audit by the **Engineering Audit Officer** and may be post-audited by the **Comptroller** and/or the **Agency**.

**ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK**

26.1 **Overrun of Unit Price Item:** An overrun is any quantity of a unit price item which the **Contractor** is directed to provide which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule.

26.1.1 For any unit price item, the **Contractor** will be paid at the unit price bid for any quantity up to one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule. If during the progress of the **Work**, the actual quantity of any unit price item required to complete the **Work** approaches the estimated quantity for that item, and for any reason it appears that the actual quantity of any unit price item necessary to complete the **Work** will exceed the estimated quantity for that item by twenty-five (25%) percent, the **Contractor** shall immediately notify the **Engineer** of such anticipated overrun. The **Contractor** shall not be compensated for any quantity of a unit price item provided which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule without written authorization from the **Engineer**.

26.1.2 If the actual quantity of any unit price item necessary to complete the **Work** will exceed one hundred twenty five (125%) percent of the estimated quantity for that item set forth in the bid schedule, the **City** reserves the right and the **Contractor** agrees to negotiate a new unit price for such item. In no event shall such negotiated new unit price exceed the unit bid price. If the **City** and **Contractor** cannot agree on a new unit price, then the **City** shall order the **Contractor** and the **Contractor** agrees to provide additional quantities of the

item on the basis of time and material records for the actual and reasonable cost as determined under Article 26.2, but in no event at a unit price exceeding the unit price bid.

26.2 **Extra Work:** For **Extra Work** where payment is by agreement on a fixed price in accordance with Article 25.3.2, the price to be paid for such **Extra Work** shall be based on the fair and reasonable estimated cost of the items set forth below. For **Extra Work** where payment is based on time and material records in accordance with Article 25.3.3, the price to be paid for such **Extra Work** shall be the actual and reasonable cost of the items set forth below, calculated in accordance with the formula specified therein, if any.

26.2.1 Necessary materials (including transportation to the Site); plus

26.2.2 Necessary direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits; plus

26.2.3 Sales and personal property taxes, if any, required to be paid on materials not incorporated into such **Extra Work**; plus

26.2.4 Reasonable rental value of **Contractor**-owned (or **Subcontractor**-owned, as applicable), necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per operating hour:  $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$ . Reasonable rental value is defined as the lower of either seventy-five percent of the monthly prorated rental rates established in "The AED Green Book, Rental Rates and Specifications for Construction Equipment" published by Equipment Watch (the "Green Book"), or seventy-five percent of the monthly prorated rental rates established in the "Rental Rate Blue Book for Construction Equipment" published by Equipment Watch (the "Blue Book") (the applicable Blue Book rate being for rental only without the addition of any operational costs listed in the Blue Book). The reasonable rental value is deemed to be inclusive of all operating costs except for fuel/energy consumption and equipment operator's wages/costs. For multiple shift utilization, reimbursement shall be calculated as follows: first shift shall be seventy-five (75%) percent of such rental rates; second shift shall be sixty (60%) percent of the first shift rate; and third shift shall be forty (40%) percent of the first shift rate. Equipment on standby shall be reimbursed at one-third (1/3) the prorated monthly rental rate. **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment includes equipment from rental companies affiliated with or controlled by the **Contractor** (or **Subcontractor**, as applicable), as determined by the **Commissioner**. In establishing cost reimbursement for non-operating **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment (scaffolding, sheeting systems, road plates, etc.), the **City** may restrict reimbursement to a purchase-salvage/life cycle basis if less than the computed rental costs; plus

26.2.5 Necessary installation and dismantling of such plant and equipment, including transportation to and from the Site, if any, provided that, in the case of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) equipment rented from a third party, the cost of installation and dismantling are not allowable if such costs are included in the rental rate; plus

26.2.6 Necessary fees charged by governmental entities; plus



26.2.7 Necessary construction-related service fees charged by non-governmental entities, such as landfill tipping fees; plus

26.2.8 Reasonable rental costs of non-Contractor-owned (or non-Subcontractor-owned, as applicable) necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per hour of operation:  $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$ . In lieu of renting, the City reserves the right to direct the purchase of non-operating equipment (scaffolding, sheeting systems, road plates, etc.), with payment on a purchase-salvage/life cycle basis, if less than the projected rental costs; plus

26.2.9 Workers' Compensation Insurance, and any insurance coverage expressly required by the City for the performance of the **Extra Work** which is different than the types of insurance required by Article 22 and Schedule A of the General Conditions. The cost of Workers' Compensation Insurance is subject to applicable payroll limitation caps and shall be based upon the carrier's Manual Rate for such insurance derived from the applicable class Loss Cost ("LC") and carrier's Lost Cost Multiplier ("LCM") approved by the New York State Department of Financial Services, and with the exception of experience rating, rate modifiers as promulgated by the New York Compensation Insurance Rating Board ("NYCIRB"); plus

26.2.10 Additional costs incurred as a result of the **Extra Work** for performance and payment bonds; plus

26.2.11 Twelve percent (12%) percent of the total of items in Articles 26.2.1 through 26.2.5 as compensation for overhead, except that no percentage for overhead will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes. Overhead shall include without limitation, all costs and expenses in connection with administration, management superintendence, small tools, and insurance required by Schedule A of the General Conditions other than Workers' Compensation Insurance; plus

26.2.12 Ten (10%) percent of the total of items in Articles 26.2.1 through 26.2.5, plus the items in Article 26.2.11, as compensation for profit, except that no percentage for profit will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes; plus

26.2.13 Five (5%) percent of the total of items in Articles 26.2.6 through 26.2.10 as compensation for overhead and profit.

26.3 Where the **Extra Work** is performed in whole or in part by other than the Contractor's own forces pursuant to Article 26.2, the Contractor shall be paid, subject to pre-audit by the **Engineering Audit Officer**, the cost of such **Work** computed in accordance with Article 26.2 above, plus an additional allowance of five (5%) percent to cover the Contractor's overhead and profit.

26.4 Where a change is ordered, involving both **Extra Work** and omitted or reduced **Contract Work**, the **Contract** price shall be adjusted, subject to pre-audit by the **EAO**, in an amount based on the difference between the cost of such **Extra Work** and of the omitted or reduced **Work**.

26.5 Where the Contractor and the Commissioner can agree upon a fixed price for **Extra Work** in accordance with Article 25.3.2 or another method of payment for **Extra Work** in accordance with Article

25.3.4, or for **Extra Work** ordered in connection with omitted **Work**, such method, subject to pre-audit by the **EAO**, may, at the option of the **Commissioner**, be substituted for the cost plus a percentage method provided in Article 26.2; provided, however, that if the **Extra Work** is performed by a **Subcontractor**, the **Contractor** shall not be entitled to receive more than an additional allowance of five (5%) percent for overhead and profit over the cost of such **Subcontractor's Work** as computed in accordance with Article 26.2.

## ARTICLE 27. RESOLUTION OF DISPUTES

27.1 All disputes between the **City** and the **Contractor** of the kind delineated in this Article 27.1 that arise under, or by virtue of, this **Contract** shall be finally resolved in accordance with the provisions of this Article 27 and the **PPB Rules**. This procedure for resolving all disputes of the kind delineated herein shall be the exclusive means of resolving any such disputes.

27.1.1 This Article 27 shall not apply to disputes concerning matters dealt with in other sections of the **PPB Rules**, or to disputes involving patents, copyrights, trademarks, or trade secrets (as interpreted by the courts of New York State) relating to proprietary rights in computer software.

27.1.2 This Article 27 shall apply only to disputes about the scope of **Work** delineated by the **Contract**, the interpretation of **Contract** documents, the amount to be paid for **Extra Work** or disputed work performed in connection with the **Contract**, the conformity of the **Contractor's Work** to the **Contract**, and the acceptability and quality of the **Contractor's Work**; such disputes arise when the **Engineer**, **Resident Engineer**, **Engineering Audit Officer**, or other designee of the **Commissioner** makes a determination with which the **Contractor** disagrees.

27.2 All determinations required by this Article 27 shall be made in writing clearly stated, with a reasoned explanation for the determination based on the information and evidence presented to the party making the determination. Failure to make such determination within the time required by this Article 27 shall be deemed a non-determination without prejudice that will allow application to the next level.

27.3 During such time as any dispute is being presented, heard, and considered pursuant to this Article 27, the **Contract** terms shall remain in force and the **Contractor** shall continue to perform **Work** as directed by the **ACCO** or the **Engineer**. Failure of the **Contractor** to continue **Work** as directed shall constitute a waiver by the **Contractor** of its claim.

27.4 Presentation of Disputes to **Commissioner**.

Notice of Dispute and Agency Response. The **Contractor** shall present its dispute in writing ("Notice of Dispute") to the **Commissioner** within thirty (30) Days of receiving written notice of the determination or action that is the subject of the dispute. This notice requirement shall not be read to replace any other notice requirements contained in the **Contract**. The Notice of Dispute shall include all the facts, evidence, documents, or other basis upon which the **Contractor** relies in support of its position, as well as a detailed computation demonstrating how any amount of money claimed by the **Contractor** in the dispute was arrived at. Within thirty (30) Days after receipt of the detailed written submission comprising the complete Notice of Dispute, the **Engineer**, **Resident Engineer**, **Engineering Audit Officer**, or other designee of the **Commissioner** shall submit to the **Commissioner** all materials he or she deems pertinent to the dispute. Following initial submissions to the **Commissioner**, either party may demand of the other the production of any document or other material the demanding party believes may be relevant to the dispute. The requested party shall produce all relevant materials that are not otherwise

protected by a legal privilege recognized by the courts of New York State. Any question of relevancy shall be determined by the **Commissioner** whose decision shall be final. Willful failure of the **Contractor** to produce any requested material whose relevancy the **Contractor** has not disputed, or whose relevancy has been affirmatively determined, shall constitute a waiver by the **Contractor** of its claim.

27.4.1 **Commissioner Inquiry.** The **Commissioner** shall examine the material and may, in his or her discretion, convene an informal conference with the **Contractor**, the **ACCO**, and the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** to resolve the issue by mutual consent prior to reaching a determination. The **Commissioner** may seek such technical or other expertise as he or she shall deem appropriate, including the use of neutral mediators, and require any such additional material from either or both parties as he or she deems fit. The **Commissioner's** ability to render, and the effect of, a decision hereunder shall not be impaired by any negotiations in connection with the dispute presented, whether or not the **Commissioner** participated therein. The **Commissioner** may or, at the request of any party to the dispute, shall compel the participation of any **Other Contractor** with a contract related to the **Work** of this **Contract**, and that **Contractor** shall be bound by the decision of the **Commissioner**. Any **Other Contractor** thus brought into the dispute resolution proceeding shall have the same rights and obligations under this Article 27 as the **Contractor** initiating the dispute.

27.4.2 **Commissioner Determination.** Within thirty (30) **Days** after the receipt of all materials and information, or such longer time as may be agreed to by the parties, the **Commissioner** shall make his or her determination and shall deliver or send a copy of such determination to the **Contractor**, the **ACCO**, and **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner**, as applicable, together with a statement concerning how the decision may be appealed.

27.4.3 **Finality of Commissioner's Decision.** The **Commissioner's** decision shall be final and binding on all parties, unless presented to the Contract Dispute Resolution Board pursuant to this Article 27. The **City** may not take a petition to the Contract Dispute Resolution Board. However, should the **Contractor** take such a petition, the **City** may seek, and the Contract Dispute Resolution Board may render, a determination less favorable to the **Contractor** and more favorable to the **City** than the decision of the **Commissioner**.

27.5 **Presentation of Dispute to the Comptroller.** Before any dispute may be brought by the **Contractor** to the Contract Dispute Resolution Board, the **Contractor** must first present its claim to the **Comptroller** for his or her review, investigation, and possible adjustment.

27.5.1 **Time, Form, and Content of Notice.** Within thirty (30) **Days** of its receipt of a decision by the **Commissioner**, the **Contractor** shall submit to the **Comptroller** and to the **Commissioner** a Notice of Claim regarding its dispute with the **Agency**. The Notice of Claim shall consist of (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written decision of the **Commissioner**; and (iii) a copy of all materials submitted by the **Contractor** to the **Agency**, including the Notice of Dispute. The **Contractor** may not present to the **Comptroller** any material not presented to the **Commissioner**, except at the request of the **Comptroller**.

27.5.2 **Response.** Within thirty (30) **Days** of receipt of the Notice of Claim, the **Agency** shall make available to the **Comptroller** a copy of all material submitted by the **Agency** to the **Commissioner** in connection with the dispute. The **Agency** may not present to the

**Comptroller** any material not presented to the **Commissioner** except at the request of the **Comptroller**.

27.5.3 **Comptroller Investigation.** The **Comptroller** may investigate the claim in dispute and, in the course of such investigation, may exercise all powers provided in Sections 7-201 and 7-203 of the Administrative Code. In addition, the **Comptroller** may demand of either party, and such party shall provide, whatever additional material the **Comptroller** deems pertinent to the claim, including original business records of the **Contractor**. Willful failure of the **Contractor** to produce within fifteen (15) **Days** any material requested by the **Comptroller** shall constitute a waiver by the **Contractor** of its claim. The **Comptroller** may also schedule an informal conference to be attended by the **Contractor**, **Agency** representatives, and any other personnel desired by the **Comptroller**.

27.5.4 **Opportunity of Comptroller to Compromise or Adjust Claim.** The **Comptroller** shall have forty-five (45) **Days** from his or her receipt of all materials referred to in Article 27.5.3 to investigate the disputed claim. The period for investigation and compromise may be further extended by agreement between the **Contractor** and the **Comptroller**, to a maximum of ninety (90) **Days** from the **Comptroller's** receipt of all materials. The **Contractor** may not present its petition to the Contract Dispute Resolution Board until the period for investigation and compromise delineated in this Article 27.5.4 has expired. In compromising or adjusting any claim hereunder, the **Comptroller** may not revise or disregard the terms of the **Contract** between the parties.

27.6 **Contract Dispute Resolution Board.** There shall be a Contract Dispute Resolution Board composed of:

27.6.1 The chief administrative law judge of the Office of Administrative Trials and Hearings (OATH) or his/her designated OATH administrative law judge, who shall act as chairperson, and may adopt operational procedures and issue such orders consistent with this Article 27 as may be necessary in the execution of the Contract Dispute Resolution Board's functions, including, but not limited to, granting extensions of time to present or respond to submissions;

27.6.2 The **CCPO** or his/her designee; any designee shall have the requisite background to consider and resolve the merits of the dispute and shall not have participated personally and substantially in the particular matter that is the subject of the dispute or report to anyone who so participated; and

27.6.3 A person with appropriate expertise who is not an employee of the **City**. This person shall be selected by the presiding administrative law judge from a prequalified panel of individuals, established and administered by OATH with appropriate background to act as decision-makers in a dispute. Such individual may not have a contract or dispute with the **City** or be an officer or employee of any company or organization that does, or regularly represents persons, companies, or organizations having disputes with the **City**.

27.7 **Petition to the Contract Dispute Resolution Board.** In the event the claim has not been settled or adjusted by the **Comptroller** within the period provided in this Article 27, the **Contractor**, within thirty (30) **Days** thereafter, may petition the Contract Dispute Resolution Board to review the **Commissioner's** determination.

27.7.1 **Form and Content of Petition by Contractor.** The **Contractor** shall present its dispute to the Contract Dispute Resolution Board in the form of a petition, which shall

include (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed, and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written Decision of the **Commissioner**, (iii) copies of all materials submitted by the **Contractor** to the Agency; (iv) a copy of the written decision of the **Comptroller**, if any, and (v) copies of all correspondence with, or written material submitted by the **Contractor**, to the **Comptroller**. The **Contractor** shall concurrently submit four (4) complete sets of the Petition: one set to the **City Corporation Counsel** (Attn: Commercial and Real Estate Litigation Division) and three (3) sets to the **Contract Dispute Resolution Board** at OATH's offices with proof of service on the **City Corporation Counsel**. In addition, the **Contractor** shall submit a copy of the written statement of the substance of the dispute, cited in (i) above, to both the **Commissioner** and the **Comptroller**.

27.7.2 **Agency Response.** Within thirty (30) **Days** of its receipt of the Petition by the **City Corporation Counsel**, the **Agency** shall respond to the brief written statement of the **Contractor** and make available to the **Contract Dispute Resolution Board** all material it submitted to the **Commissioner** and **Comptroller**. Three (3) complete copies of the **Agency** response shall be provided to the **Contract Dispute Resolution Board** and one to the **Contractor**. Extensions of time for submittal of the **Agency** response shall be given as necessary upon a showing of good cause or, upon consent of the parties, for an initial period of up to thirty (30) **Days**.

27.7.3 **Further Proceedings.** The **Contract Dispute Resolution Board** shall permit the **Contractor** to present its case by submission of memoranda, briefs, and oral argument. The **Contract Dispute Resolution Board** shall also permit the **Agency** to present its case in response to the **Contractor** by submission of memoranda, briefs, and oral argument. If requested by the **City Corporation Counsel**, the **Comptroller** shall provide reasonable assistance in the preparation of the **Agency's** case. Neither the **Contractor** nor the **Agency** may support its case with any documentation or other material that was not considered by the **Comptroller**, unless requested by the **Contract Dispute Resolution Board**. The **Contract Dispute Resolution Board**, in its discretion, may seek such technical or other expert advice as it shall deem appropriate and may seek, on its own or upon application of a party, any such additional material from any party as it deems fit. The **Contract Dispute Resolution Board**, in its discretion, may combine more than one dispute between the parties for concurrent resolution.

27.7.4 **Contract Dispute Resolution Board Determination.** Within forty-five (45) **Days** of the conclusion of all written submissions and oral arguments, the **Contract Dispute Resolution Board** shall render a written decision resolving the dispute. In an unusually complex case, the **Contract Dispute Resolution Board** may render its decision in a longer period, not to exceed ninety (90) **Days**, and shall so advise the parties at the commencement of this period. The **Contract Dispute Resolution Board's** decision must be consistent with the terms of the **Contract**. Decisions of the **Contract Dispute Resolution Board** shall only resolve matters before the **Contract Dispute Resolution Board** and shall not have precedential effect with respect to matters not before the **Contract Dispute Resolution Board**.

27.7.5 **Notification of Contract Dispute Resolution Board Decision.** The **Contract Dispute Resolution Board** shall send a copy of its decision to the **Contractor**, the **ACCO**, the **Engineer**, the **Comptroller**, the **City Corporation Counsel**, the **CCPO**, and the **PPB**. A decision in favor of the **Contractor** shall be subject to the prompt payment provisions of the **PPB Rules**. The **Required Payment Date** shall be thirty (30) **Days** after the date the parties are formally notified of the **Contract Dispute Resolution Board's** decision.

27.7.6 Finality of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution Board's decision shall be final and binding on all parties. Any party may seek review of the Contract Dispute Resolution Board's decision solely in the form of a challenge, filed within four (4) months of the date of the Contract Dispute Resolution Board's decision, in a court of competent jurisdiction of the State of New York, County of New York pursuant to Article 78 of the Civil Practice Law and Rules. Such review by the court shall be limited to the question of whether or not the Contract Dispute Resolution Board's decision was made in violation of lawful procedure, was affected by an error of Law, or was arbitrary and capricious or an abuse of discretion. No evidence or information shall be introduced or relied upon in such proceeding that was not presented to the Contract Dispute Resolution Board in accordance with this Article 27.

27.8 Any termination, cancellation, or alleged breach of the Contract prior to or during the pendency of any proceedings pursuant to this Article 27 shall not affect or impair the ability of the Commissioner or Contract Dispute Resolution Board to make a binding and final decision pursuant to this Article 27.

**ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS**

28.1 While the Contractor or any of its Subcontractors is performing Work on a time and material basis or Extra Work on a time and material basis ordered by the Commissioner under Article 25, or where the Contractor believes that it or any of its Subcontractors is performing Extra Work but a final determination by Agency has not been made, or the Contractor or any of its Subcontractors is performing disputed Work (whether on or off the Site), or complying with a determination or order under protest in accordance with Articles 11, 27, and 30, in each such case the Contractor shall furnish the Resident Engineer daily with three (3) copies of written statements signed by the Contractor's representative at the Site showing:

28.1.1 The name, trade, and number of each worker employed on such Work or engaged in complying with such determination or order, the number of hours employed, and the character of the Work each is doing; and

28.1.2 The nature and quantity of any materials, plant and equipment furnished or used in connection with the performance of such Work or compliance with such determination or order, and from whom purchased or rented.

28.2 A copy of such statement will be countersigned by the Resident Engineer, noting thereon any items not agreed to or questioned, and will be returned to the Contractor within two (2) Days after submission.

28.3 The Contractor and its Subcontractors, when required by the Commissioner, or the Comptroller, shall also produce for inspection, at the office of the Contractor or Subcontractor, any and all of its books, bid documents, financial statements, vouchers, records, daily job diaries and reports, and cancelled checks, and any other documents relating to showing the nature and quantity of the labor, materials, plant and equipment actually used in the performance of such Work, or in complying with such determination or order, and the amounts expended therefor, and shall permit the Commissioner and the Comptroller to make such extracts therefrom, or copies thereof, as they or either of them may desire.

28.4 In connection with the examination provided for herein, the Commissioner, upon demand therefor, will produce for inspection by the Contractor such records as the Agency may have with

respect to such **Extra Work** or disputed **Work** performed under protest pursuant to order of the **Commissioner**, except those records and reports which may have been prepared for the purpose of determining the accuracy and validity of the **Contractor's** claim.

28.5 Failure to comply strictly with these requirements shall constitute a waiver of any claim for extra compensation or damages on account of the performance of such **Work** or compliance with such determination or order.

#### **ARTICLE 29. OMITTED WORK**

29.1 If any **Contract Work** in a lump sum **Contract**, or if any part of a lump sum item in a unit price, lump sum, or percentage-bid **Contract** is omitted by the **Commissioner** pursuant to Article 33, the **Contract** price, subject to audit by the EAO, shall be reduced by a pro rata portion of the lump sum bid amount based upon the percent of **Work** omitted subject to Article 29.4. For the purpose of determining the pro rata portion of the lump sum bid amount, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be the determining factor.

29.2 If the whole of a lump sum item or units of any other item is so omitted by the **Commissioner** in a unit price, lump sum, or percentage-bid **Contract**, then no payment will be made therefor except as provided in Article 29.4.

29.3 For units that have been ordered but are only partially completed, the unit price shall be reduced by a pro rata portion of the unit price bid based upon the percentage of **Work** omitted subject to Article 29.4.

29.4 In the event the **Contractor**, with respect to any omitted **Work**, has purchased any non-cancelable material and/or equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated into the **Work**, the **Contractor** shall be paid for such material and/or equipment in accordance with Article 64.2.1(b); provided, however, such payment is contingent upon the **Contractor's** delivery of such material and/or equipment in acceptable condition to a location designated by the **City**.

29.5 The **Contractor** agrees to make no claim for damages or for loss of overhead and profit with regard to any omitted **Work**.

#### **ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS**

30.1 If the **Contractor** shall claim to be sustaining damages by reason of any act or omission of the **City** or its agents, it shall submit to the **Commissioner** within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter for as long as such damages are incurred, verified statements of the details and the amounts of such damages, together with documentary evidence of such damages. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. Failure of the **Commissioner** to respond in writing to a written request for additional time within thirty (30) **Days** shall be deemed a denial of the request. On failure of the **Contractor** to strictly comply with the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action or dispute resolution procedure arising under or by reason of this **Contract** shall not be different from or in excess of the statements and documentation made pursuant to this Article 30.

30.2 In addition to the foregoing statements, the **Contractor** shall, upon notice from the **Commissioner**, produce for examination at the **Contractor's** office, by the **Engineer**, **Architect** or **Project Manager**, all of its books of account, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**, and submit itself and persons in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.3 In addition to the statements required under Article 28 and this Article 30, the **Contractor** and/or its **Subcontractor** shall, within thirty (30) **Days** upon notice from the **Commissioner** or **Comptroller**, produce for examination at the **Contractor's** and/or **Subcontractor's** office, by a representative of either the **Commissioner** or **Comptroller**, all of its books of account, bid documents, financial statements, accountant workpapers, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**. Further, the **Contractor** and/or its **Subcontractor** shall submit any person in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.4 Unless the information and examination required under Article 30.3 is provided by the **Contractor** and/or its **Subcontractor** upon thirty (30) **Days'** notice from the **Commissioner** or **Comptroller**, or upon the **Commissioner's** or **Comptroller's** written authorization to extend the time to comply, the **City** shall be released from all claims arising under, relating to or by reason of this **Contract**, except for sums certified by the **Commissioner** to be due under the provisions of this **Contract**. It is further stipulated and agreed that no person has the power to waive any of the foregoing provisions and that in any action or dispute resolution procedure against the **City** to recover any sum in excess of the sums certified by the **Commissioner** to be due under or by reason of this **Contract**, the **Contractor** must allege in its complaint and prove, at trial or during such dispute resolution procedure, compliance with the provisions of this Article 30.

30.5 In addition, after the commencement of any action or dispute resolution procedure by the **Contractor** arising under or by reason of this **Contract**, the **City** shall have the right to require the **Contractor** to produce for examination under oath, up until the trial of the action or hearing before the Contract Dispute Resolution Board, the books and documents described in Article 30.3 and submit itself and all persons in its employ for examination under oath. If this Article 30 is not complied with as required, then the **Contractor** hereby consents to the dismissal of the action or dispute resolution procedure.

**CHAPTER VII**  
**POWERS OF THE RESIDENT ENGINEER,**  
**THE ENGINEER OR ARCHITECT AND THE COMMISSIONER**

**ARTICLE 31. THE RESIDENT ENGINEER**

31.1 The **Resident Engineer** shall have the power to inspect, supervise, and control the performance of the **Work**, subject to review by the **Commissioner**. The **Resident Engineer** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.



## ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER

32.1 The **Engineer** or **Architect** or **Project Manager**, in addition to those matters elsewhere herein delegated to the **Engineer** and expressly made subject to his/her determination, direction or approval, shall have the power, subject to review by the **Commissioner**:

32.1.1 To determine the amount, quality, and location of the **Work** to be paid for hereunder; and

32.1.2 To determine all questions in relation to the **Work**, to interpret the **Contract Drawings, Specifications, and Addenda**, and to resolve all patent inconsistencies or ambiguities therein; and

32.1.3 To determine how the **Work** of this **Contract** shall be coordinated with **Work** of **Other Contractors** engaged simultaneously on this **Project**, including the power to suspend any part of the **Work**, but not the whole thereof; and

32.1.4 To make minor changes in the **Work** as he/she deems necessary, provided such changes do not result in a net change in the cost to the **City** or to the **Contractor** of the **Work** to be done under the **Contract**; and

32.1.5 To amplify the **Contract Drawings**, add explanatory information and furnish additional **Specifications** and drawings, consistent with this **Contract**.

32.2 The foregoing enumeration shall not imply any limitation upon the power of the **Engineer** or **Architect** or **Project Manager**, for it is the intent of this **Contract** that all of the **Work** shall generally be subject to his/her determination, direction, and approval, except where the determination, direction or approval of someone other than the **Engineer** or **Architect** or **Project Manager** is expressly called for herein.

32.3 The **Engineer** or **Architect** or **Project Manager** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

## ARTICLE 33. THE COMMISSIONER

33.1 The **Commissioner**, in addition to those matters elsewhere herein expressly made subject to his/her determination, direction or approval, shall have the power:

33.1.1 To review and make determinations on any and all questions in relation to this **Contract** and its performance; and

33.1.2 To modify or change this **Contract** so as to require the performance of **Extra Work** (subject, however, to the limitations specified in Article 25) or the omission of **Contract Work**; and

33.1.3 To suspend the whole or any part of the **Work** whenever in his/her judgment such suspension is required:

33.1.3(a) In the interest of the **City** generally; or

33.1.3(b) To coordinate the **Work** of the various contractors engaged on this **Project** pursuant to the provisions of Article 12; or

33.1.3(c) To expedite the completion of the entire **Project** even though the completion of this particular **Contract** may thereby be delayed.

#### ARTICLE 34. NO ESTOPPEL

34.1 Neither the **City** nor any **Agency**, official, agent or employee thereof, shall be bound, precluded or estopped by any determination, decision, approval, order, letter, payment or certificate made or given under or in connection with this **Contract** by the **City**, the **Commissioner**, the **Engineer**, the **Resident Engineer**, or any other official, agent or employee of the **City**, either before or after the final completion and acceptance of the **Work** and payment therefor:

34.1.1 From showing the true and correct classification, amount, quality or character of the **Work** actually done; or that any such determination, decision, order, letter, payment or certificate was untrue, incorrect or improperly made in any particular, or that the **Work**, or any part thereof, does not in fact conform to the requirements of this **Contract**; and

34.1.2 From demanding and recovering from the **Contractor** any overpayment made to it, or such damages as the **City** may sustain by reason of the **Contractor's** failure to perform each and every part of its **Contract**.

### CHAPTER VIII LABOR PROVISIONS

#### ARTICLE 35. EMPLOYEES

35.1 The **Contractor** and its **Subcontractors** shall not employ on the **Work**:

35.1.1 Anyone who is not competent, faithful and skilled in the **Work** for which he/she shall be employed; and whenever the **Commissioner** shall inform the **Contractor**, in writing, that any employee is, in his/her opinion, incompetent, unfaithful or disobedient, that employee shall be discharged from the **Work** forthwith, and shall not again be employed upon it; or

35.1.2 Any labor, materials or means whose employment, or utilization during the course of this **Contract**, may tend to or in any way cause or result in strikes, work stoppages, delays, suspension of **Work** or similar troubles by workers employed by the **Contractor** or its **Subcontractors**, or by any of the trades working in or about the buildings and premises where **Work** is being performed under this **Contract**, or by **Other Contractors** or their **Subcontractors** pursuant to other contracts, or on any other building or premises owned or operated by the **City**, its **Agencies**, departments, boards or authorities. Any violation by the **Contractor** of this requirement may, upon certification of the **Commissioner**, be considered as proper and sufficient cause for declaring the **Contractor** to be in default, and for the **City** to take action against it as set forth in Chapter X of this **Contract**, or such other article of this **Contract** as the **Commissioner** may deem proper; or

35.1.3 In accordance with Section 220.3-e of the Labor Law of the State of New York (hereinafter "Labor Law"), the **Contractor** and its **Subcontractors** shall not employ on the **Work** any apprentice, unless he/she is a registered individual, under a bona fide program

registered with the New York State Department of Labor. The allowable ratio of apprentices to journey-level workers in any craft classification shall not be greater than the ratio permitted to the **Contractor** as to its work force on any job under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the wage rate determined by the **Comptroller** of the **City** for the classification of **Work** actually performed. The **Contractor** or **Subcontractor** will be required to furnish written evidence of the registration of its program and apprentices as well as all the appropriate ratios and wage rates, for the area of the construction prior to using any apprentices on the **Contract Work**.

35.2 If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, all laborers, workers, and mechanics employed in the performance of the **Contract** on the public work site, either by the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by the **Contract**, shall be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration.

35.3 In accordance with Local Law Nos. 30-2012 and 33-2012, codified at sections 6-132 and 12-113 of the Administrative Code, respectively,

35.3.1 The **Contractor** shall not take an adverse personnel action with respect to an officer or employee in retaliation for such officer or employee making a report of information concerning conduct which such officer or employee knows or reasonably believes to involve corruption, criminal activity, conflict of interest, gross mismanagement or abuse of authority by any officer or employee relating to this **Contract** to (a) the Commissioner of the Department of Investigation, (b) a member of the New York City Council, the Public Advocate, or the **Comptroller**, or (c) the **CCPO**, **ACCO**, **Agency head**, or **Commissioner**.

35.3.2 If any of the **Contractor's** officers or employees believes that he or she has been the subject of an adverse personnel action in violation of Article 35.3.1, he or she shall be entitled to bring a cause of action against the **Contractor** to recover all relief necessary to make him or her whole. Such relief may include but is not limited to: (a) an injunction to restrain continued retaliation, (b) reinstatement to the position such employee would have had but for the retaliation or to an equivalent position, (c) reinstatement of full fringe benefits and seniority rights, (d) payment of two times back pay, plus interest, and (e) compensation for any special damages sustained as a result of the retaliation, including litigation costs and reasonable attorney's fees.

35.3.3 The **Contractor** shall post a notice provided by the **City** in a prominent and accessible place on any site where work pursuant to the **Contract** is performed that contains information about:

35.3.3(a) how its employees can report to the New York City Department of Investigation allegations of fraud, false claims, criminality or corruption arising out of or in connection with the **Contract**; and

35.3.3(b) the rights and remedies afforded to its employees under Administrative Code sections 7-805 (the New York City False Claims Act) and 12-113 (the Whistleblower Protection Expansion Act) for lawful acts taken in connection with the reporting of allegations of fraud, false claims, criminality or corruption in connection with the **Contract**.

35.3.4 For the purposes of this Article 35.3, "adverse personnel action" includes dismissal, demotion, suspension, disciplinary action, negative performance evaluation, any action resulting in loss of staff, office space, equipment or other benefit, failure to appoint, failure to promote, or any transfer or assignment or failure to transfer or assign against the wishes of the affected officer or employee.

35.3.5 This Article 35.3 is applicable to all of the **Contractor's Subcontractors** having subcontracts with a value in excess of \$100,000; accordingly, the **Contractor** shall include this rider in all subcontracts with a value in excess of \$100,000.

35.4 Article 35.3 is not applicable to this **Contract** if it is valued at \$100,000 or less. Articles 35.3.1, 35.3.2, 35.3.4, and 35.3.5 are not applicable to this **Contract** if it was solicited pursuant to a finding of an emergency.

### ARTICLE 36. NO DISCRIMINATION

36.1 The **Contractor** specifically agrees, as required by Labor Law Section 220-e, as amended, that:

36.1.1 In the hiring of employees for the performance of **Work** under this **Contract** or any subcontract hereunder, neither the **Contractor, Subcontractor**, nor any person acting on behalf of such **Contractor** or **Subcontractor**, shall by reason of race, creed, color or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the **Work** to which the employment relates;

36.1.2 Neither the **Contractor, Subcontractor**, nor any person on its behalf shall, in any manner, discriminate against or intimidate any employee hired for the performance of **Work** under this **Contract** on account of race, creed, color or national origin;

36.1.3 There may be deducted from the amount payable to the **Contractor** by the **City** under this **Contract** a penalty of fifty (\$50.00) dollars for each person for each **Day** during which such person was discriminated against or intimidated in violation of the provisions of this **Contract**; and

36.1.4 This **Contract** may be cancelled or terminated by the **City** and all moneys due or to become due hereunder may be forfeited, for a second or any subsequent violation of the terms or conditions of this Article 36.

36.1.5 This Article 36 covers all construction, alteration and repair of any public building or public work occurring in the State of New York and the manufacture, sale, and distribution of materials, equipment, and supplies to the extent that such operations are performed within the State of New York pursuant to this **Contract**.

36.2 The **Contractor** specifically agrees, as required by Section 6-108 of the Administrative Code, as amended, that:

36.2.1 It shall be unlawful for any person engaged in the construction, alteration or repair of buildings or engaged in the construction or repair of streets or highways pursuant to a **Contract** with the **City** or engaged in the manufacture, sale or distribution of materials, equipment or supplies pursuant to a **Contract** with the **City** to refuse to employ or to refuse to continue in any employment any person on account of the race, color or creed of such person.

36.2.2 It shall be unlawful for any person or any servant, agent or employee of any person, described in Article 36.1.2, to ask, indicate or transmit, orally or in writing, directly or indirectly, the race, color or creed or religious affiliation of any person employed or seeking employment from such person, firm or corporation.

36.2.3 Breach of the foregoing provisions shall be deemed a violation of a material provision of this **Contract**.

36.2.4 Any person, or the employee, manager or owner of or officer of such firm or corporation who shall violate any of the provisions of this Article 36.2 shall, upon conviction thereof, be punished by a fine of not more than one hundred (\$100.00) dollars or by imprisonment for not more than thirty (30) **Days**, or both.

36.3 This **Contract** is subject to the requirements of Executive Order No. 50 (1980) ("E.O. 50"), as revised, and the rules and regulations promulgated thereunder. No contract will be awarded unless and until these requirements have been complied with in their entirety. By signing this **Contract**, the **Contractor** agrees that it:

36.3.1 Will not engage in any unlawful discrimination against any employee or applicant for employment because of race, creed, color, national origin, sex, age, disability, marital status or sexual orientation with respect to all employment decisions including, but not limited to, recruitment, hiring, upgrading, demotion, downgrading, transfer, training, rates of pay or other forms of compensation, layoff, termination, and all other terms and conditions of employment; and

36.3.2 Will not engage in any unlawful discrimination in the selection of **Subcontractors** on the basis of the owner's race, color, creed, national origin, sex, age, disability, marital status or sexual orientation; and

36.3.3 Will state in all solicitations or advertisements for employees placed by or on behalf of the **Contractor** that all qualified applicants will receive consideration for employment without unlawful discrimination based on race, creed, color, national origin, sex, age, citizenship status, disability, marital status, sexual orientation, or that it is an equal employment opportunity employer; and

36.3.4 Will send to each labor organization or representative of workers with which it has a collective bargaining agreement or other contract or memorandum of understanding, written notification of its equal employment opportunity commitments under E.O. 50 and the rules and regulations promulgated thereunder; and

36.3.5 Will furnish, before the award of the **Contract**, all information and reports, including an employment report, that are required by E.O. 50, the rules and regulations promulgated thereunder, and orders of the **City** Department of Business Services, Division of Labor Services (**DLS**) and will permit access to its books, records, and accounts by the **DLS** for the purposes of investigation to ascertain compliance with such rules, regulations, and orders.

36.4 The **Contractor** understands that in the event of its noncompliance with the nondiscrimination clauses of this **Contract** or with any of such rules, regulations, or orders, such noncompliance shall constitute a material breach of this **Contract** and noncompliance with E.O. 50 and the rules and regulations promulgated thereunder. After a hearing held pursuant to the rules of the **DLS**, the Director of the **DLS** may direct the **Commissioner** to impose any or all of the following sanctions:

36.4.1 Disapproval of the **Contractor**; and/or

36.4.2 Suspension or termination of the **Contract**; and/or

36.4.3 Declaring the **Contractor** in default; and/or

36.4.4 In lieu of any of the foregoing sanctions, the Director of the **DLS** may impose an employment program.

In addition to any actions taken under this **Contract**, failure to comply with E.O. 50 and the rules and regulations promulgated thereunder, in one or more instances, may result in a **City Agency** declaring the **Contractor** to be non-responsible in future procurements. The **Contractor** further agrees that it will refrain from entering into any **Contract** or **Contract** modification subject to E.O. 50 and the rules and regulations promulgated thereunder with a **Subcontractor** who is not in compliance with the requirements of E.O. 50 and the rules and regulations promulgated thereunder.

36.5 The **Contractor** specifically agrees, as required by Section 6-123 of the Administrative Code, that:

36.5.1 The **Contractor** will not engage in any unlawful discriminatory practice in violation of Title 8 of the Administrative Code; and

36.5.2 Any failure to comply with this Article 36.5 may subject the **Contractor** to the remedies set forth in Section 6-123 of the Administrative Code, including, where appropriate, sanctions such as withholding of payment, imposition of an employment program, finding the **Contractor** to be in default, cancellation of the **Contract**, or any other sanction or remedy provided by **Law** or **Contract**.

### ARTICLE 37. LABOR LAW REQUIREMENTS

37.1 The **Contractor** shall strictly comply with all applicable provisions of the Labor Law, as amended. Such compliance is a material term of this **Contract**.

37.2 The **Contractor** specifically agrees, as required by Labor Law Sections 220 and 220-d, as amended, that:

37.2.1 **Hours of Work**: No laborer, worker, or mechanic in the employ of the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by this **Contract** shall be permitted or required to work more than eight (8) hours in any one (1) **Day**, or more than five (5) **Days** in any one (1) week, except as provided in the Labor Law and in cases of extraordinary emergency including fire, flood, or danger to life or property, or in the case of national emergency when so proclaimed by the President of the United States of America.

37.2.2 In situations in which there are not sufficient laborers, workers, and mechanics who may be employed to carry on expeditiously the **Work** contemplated by this **Contract** as a result of such restrictions upon the number of hours and **Days** of labor, and the immediate commencement or prosecution or completion without undue delay of the **Work** is necessary for the preservation of the **Site** and/or for the protection of the life and limb of the persons using the same, such laborers, workers, and mechanics shall be permitted or required to

work more than eight (8) hours in any one (1) Day; or five (5) Days in any one (1) week; provided, however, that upon application of any Contractor, the Commissioner shall have first certified to the Commissioner of Labor of the State of New York (hereinafter "Commissioner of Labor") that such public Work is of an important nature and that a delay in carrying it to completion would result in serious disadvantage to the public; and provided, further, that such Commissioner of Labor shall have determined that such an emergency does in fact exist as provided in Labor Law Section 220.2.

37.2.3 Failure of the Commissioner to make such a certification to the Commissioner of Labor shall not entitle the Contractor to damages for delay or for any cause whatsoever.

37.2.4 Prevailing Rate of Wages: The wages to be paid for a legal day's Work to laborers, workers, or mechanics employed upon the Work contemplated by this Contract or upon any materials to be used thereon shall not be less than the "prevailing rate of wage" as defined in Labor Law Section 220, and as fixed by the Comptroller in the attached Schedule of Wage Rates and in updated schedules thereof. The prevailing wage rates and supplemental benefits to be paid are those in effect at the time the Work is being performed.

37.2.5 Requests for interpretation or correction in the Information for Bidders includes all requests for clarification of the classification of trades to be employed in the performance of the Work under this Contract. In the event that a trade not listed in the Contract is in fact employed during the performance of this Contract, the Contractor shall be required to obtain from the Agency the prevailing wage rates and supplementary benefits for the trades used and to complete the performance of this Contract at the price at which the Contract was awarded.

37.2.6 Minimum Wages: Except for employees whose wage is required to be fixed pursuant to Labor Law Section 220, all persons employed by the Contractor and any Subcontractor in the manufacture or furnishing of the supplies, materials, or equipment, or the furnishing of work, labor, or services, used in the performance of this Contract, shall be paid, without subsequent deduction or rebate unless expressly authorized by Law, not less than the sum mandated by Law.

37.3 Working Conditions: No part of the Work, labor or services shall be performed or rendered by the Contractor in any plants, factories, buildings or surroundings or under working conditions which are unsanitary or hazardous or dangerous to the health and safety of employees engaged in the performance of this Contract. Compliance with the safety, sanitary, and factory inspection Laws of the state in which the Work is to be performed shall be prima facie evidence of compliance with this Article 37.3.

37.4 Prevailing Wage Enforcement: The Contractor agrees to pay for all costs incurred by the City in enforcing prevailing wage requirements, including the cost of any investigation conducted by or on behalf of the Agency or the Comptroller, where the City discovers a failure to comply with any of the requirements of this Article 37 by the Contractor or its Subcontractor(s). The Contractor also agrees that, should it fail or refuse to pay for any such investigation, the Agency is hereby authorized to deduct from a Contractor's account an amount equal to the cost of such investigation.

37.4.1 The Labor Law Section 220 and Section 220-d, as amended, provide that this Contract shall be forfeited and no sum paid for any Work done hereunder on a second conviction for willfully paying less than:

37.4.1(a) The stipulated prevailing wage scale as provided in Labor Law section 220, as amended, or

37.4.1(b) The stipulated minimum hourly wage scale as provided in Labor Law section 220-d, as amended.

37.4.2 For any breach or violation of either working conditions (Article 37.3) or minimum wages (Article 37.2.6) provisions, the party responsible therefor shall be liable to the **City** for liquidated damages, which may be withheld from any amounts due on any contracts with the **City** of such party responsible, or may be recovered in actions brought by the **City** Corporation Counsel in the name of the **City**, in addition to damages for any other breach of this **Contract**, for a sum equal to the amount of any underpayment of wages due to any employee engaged in the performance of this **Contract**. In addition, the **Commissioner** shall have the right to cancel contracts and enter into other contracts for the completion of the original contract, with or without public letting, and the original **Contractor** shall be liable for any additional cost. All sums withheld or recovered as deductions, rebates, refunds, or underpayment of wages hereunder, shall be held in a special deposit account and shall be paid without interest, on order of the **Comptroller**, directly to the employees who have been paid less than minimum rates of pay as set forth herein and on whose account such sums were withheld or recovered, provided that no claims by employees for such payments shall be entertained unless made within two (2) years from the date of actual notice to the **Contractor** of the withholding or recovery of such sums by the **City**.

37.4.3 A determination by the **Comptroller** that a **Contractor** and/or its **Subcontractor** willfully violated Labor Law Section 220 will be forwarded to the **City's** five District Attorneys for review.

37.4.4 The **Contractor's** or **Subcontractor's** noncompliance with this Article 37.4 and Labor Law Section 220 may result in an unsatisfactory performance evaluation and the **Comptroller** may also find and determine that the **Contractor** or **Subcontractor** willfully violated the New York Labor Law.

37.4.4(a) An unsatisfactory performance evaluation for noncompliance with this Article 37.4 may result in a determination that the **Contractor** is a non-responsible bidder on subsequent procurements with the **City** and thus a rejection of a future award of a contract with the **City**, as well as any other sanctions provided for by **Law**.

37.4.4(b) Labor Law Section 220-b, as amended, provides that when two (2) final determinations have been rendered against a **Contractor** or **Subcontractor** within any consecutive six (6) year period determining that such **Contractor** or **Subcontractor** has willfully failed to pay the prevailing rate of wages or to provide supplements in accordance with the Labor Law and this Article 37.4, whether such failures were concurrent or consecutive and whether or not such final determinations concerning separate public works projects are rendered simultaneously, such **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the second final determination. If the final determination involves the falsification of payroll records or the kickback of wages or supplements, the **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the first final determination.

37.4.4(c) Labor Law Section 220, as amended, provides that the **Contractor** or **Subcontractor** found to have violated this Article 37.4 may be directed to make payment of wages or supplements including interest found to be due, and the **Contractor** or **Subcontractor** may be directed to make payment of a further sum as



a civil penalty in an amount not exceeding twenty-five (25%) percent of the total amount found to be due.

37.5 The **Contractor** and its **Subcontractors** shall within ten (10) **Days** after mailing of a Notice of Award or written order, post in prominent and conspicuous places in each and every plant, factory, building, and structure where employees of the **Contractor** and its **Subcontractors** engaged in the performance of this **Contract** are employed, notices furnished by the **City**, in relation to prevailing wages and supplements, minimum wages, and other stipulations contained in Sections 220 and 220-h of the Labor Law, and the **Contractor** and its **Subcontractors** shall continue to keep such notices posted in such prominent and conspicuous places until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services required to be furnished or rendered under this **Contract**.

37.6 The **Contractor** shall strictly comply with all of the provisions of Articles 37.6.1 through 37.6.5, and provide for all workers, laborers or mechanics in its employ, the following:

37.6.1 **Notices Posted At Site:** Post, in a location designated by the **City**, schedules of prevailing wages and supplements for this **Project**, a copy of all re-determinations of such schedules for the **Project**, the Workers' Compensation Law Section 51 notice, all other notices required by Law to be posted at the **Site**, the **City** notice that this **Project** is a public works project on which each worker is entitled to receive the prevailing wages and supplements for the occupation at which he or she is working, and all other notices which the **City** directs the **Contractor** to post. The **Contractor** shall provide a surface for such notices which is satisfactory to the **City**. The **Contractor** shall maintain and keep current such notices in a legible manner and shall replace any notice or schedule which is damaged, defaced, illegible or removed for any reason. The **Contractor** shall post such notices before commencing any **Work** on the **Site** and shall maintain such notices until all **Work** on the **Site** is complete; and

37.6.2 **Daily Site Sign-in Sheets:** Maintain daily **Site** sign-in sheets, and require that **Subcontractors** maintain daily **Site** sign-in sheets for its employees, which include blank spaces for an employee's name to be both printed and signed, job title, date started and Social Security number, the time the employee began work and the time the employee left work, until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services to be furnished or rendered under this **Contract** unless exception is granted by the **Comptroller** upon application by the **Agency**. In the alternative, subject to the approval of the **CCPO**, the **Contractor** and **Subcontractor** may maintain an electronic or biometric sign-in system, which provides the information required by this Article 37.6.2; and

37.6.3 **Individual Employee Information Notices:** Distribute a notice to each worker, laborer or mechanic employed under this **Contract**, in a form provided by the **Agency**, that this **Project** is a public works project on which each worker, laborer or mechanic is entitled to receive the prevailing rate of wages and supplements for the occupation at which he or she is working. If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, such notice shall also include a statement that each worker, laborer or mechanic must be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration. Such notice shall be distributed to each worker before he or she starts performing any **Work** of this **Contract** and with the first paycheck after July first of each year. "Worker, laborer or mechanic" includes employees of the **Contractor** and all **Subcontractors** and all employees of suppliers entering the **Site**. At the time of distribution, the **Contractor** shall have each worker, laborer or mechanic sign a statement, in a form provided by the **Agency**, certifying that the worker has received the notice required by this

Article 37.6.3, which signed statement shall be maintained with the payroll records required by this **Contract**; and

37.6.3(a) The **Contractor** and each **Subcontractor** shall notify each worker, laborer or mechanic employed under this **Contract** in writing of the prevailing rate of wages for their particular job classification. Such notification shall be given to every worker, laborer, and mechanic on their first pay stub and with every pay stub thereafter; and

37.6.4 **Site Laminated Identification Badges:** The **Contractor** shall provide laminated identification badges which include a photograph of the worker's, laborer's or mechanic's face and indicate the worker's, laborer's or mechanic's name, trade, employer's name, and employment starting date (month/day/year). Further, the **Contractor** shall require as a condition of employment on the **Site**, that each and every worker, laborer or mechanic wear the laminated identification badge at all times and that it may be seen by any representative of the **City**. The **Commissioner** may grant a written waiver from the requirement that the laminated identification badge include a photograph if the **Contractor** demonstrates that the identity of an individual wearing a laminated identification badge can be easily verified by another method; and

37.6.5 **Language Other Than English Used On Site:** Provide the **ACCO** notice when three (3) or more employees (worker and/or laborer and/or mechanic) on the **Site**, at any time, speak a language other than English. The **ACCO** will then provide the **Contractor** the notices described in Article 37.6.1 in that language or languages as may be required. The **Contractor** is responsible for all distributions under this Article 37; and

37.6.6 **Provision of Records:** The **Contractor** and **Subcontractor(s)** shall produce within five (5) **Days** on the **Site** of the **Work** and upon a written order of the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, or the **Comptroller**, such records as are required to be kept by this Article 37.6; and

37.6.7 The **Contractor** and **Subcontractor(s)** shall pay employees by check or direct deposit. If this **Contract** is for an amount greater than one million (\$1,000,000) dollars, checks issued by the **Contractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**). For any subcontract for an amount greater than seven hundred fifty thousand (\$750,000) dollars, checks issued by a **Subcontractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**); and

37.6.8 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 37.6.1 through 37.6.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.7 The **Contractor** and its **Subcontractors** shall keep such employment and payroll records as are required by Section 220 of the Labor Law. The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of this Article 37.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.8 At the time the **Contractor** makes application for each partial payment and for final payment, the **Contractor** shall submit to the **Commissioner** a written payroll certification, in the form provided by this **Contract**, of compliance with the prevailing wage, minimum wage, and other provisions and stipulations required by Labor Law Section 220 and of compliance with the training requirements of

Labor Law Section 220-h set forth in Article 35.2. This certification of compliance shall be a condition precedent to payment and no payment shall be made to the **Contractor** unless and until each such certification shall have been submitted to and received by the **Commissioner**.

37.9 This **Contract** is executed by the **Contractor** with the express warranty and representation that the **Contractor** is not disqualified under the provisions of Section 220 of the Labor Law from the award of the **Contract**.

37.10 Any breach or violation of any of the foregoing shall be deemed a breach or violation of a material provision of this **Contract**, and grounds for cancellation thereof by the **City**.

#### ARTICLE 38. PAYROLL REPORTS

38.1 The **Contractor** and its **Subcontractor(s)** shall maintain on the **Site** during the performance of the **Work** the original payrolls or transcripts thereof which the **Contractor** and its **Subcontractor(s)** are required to maintain and shall submit such original payrolls or transcripts, subscribed and affirmed by it as true, within thirty (30) **Days** after issuance of its first payroll, and every thirty (30) **Days** thereafter, pursuant to Labor Law Section 220(3-a)(a)(iii). The **Contractor** and **Subcontractor(s)** shall submit such original payrolls or transcripts along with each and every payment requisition. If payment requisitions are not submitted at least once a month, the **Contractor** and its **Subcontractor(s)** shall submit original payrolls and transcripts both along with its payment requisitions and independently of its payment requisitions.

38.2 The **Contractor** shall maintain payrolls or transcripts thereof for six (6) years from the date of completion of the **Work** on this **Contract**. If such payrolls and transcripts are maintained outside of New York City after the completion of the **Work** and their production is required pursuant to this Article 38, the **Contractor** shall produce such records in New York City upon request by the **City**.

38.3 The **Contractor** and **Subcontractor(s)** shall comply with any written order, direction, or request made by the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)**, or the **Comptroller**, to provide to the requesting party any of the following information and/or records within five (5) **Days** of such written order, direction, or request:

38.3.1 Such original payrolls or transcripts thereof subscribed and affirmed by it as true and the statements signed by each worker pursuant to this Chapter VIII; and/or

38.3.2 Attendance sheets for each **Day** on which any employee of the **Contractor** and/or any of the **Subcontractor(s)** performed **Work** on the **Site**, which attendance sheet shall be in a form acceptable to the **Agency** and shall provide information acceptable to the **Agency** to identify each such employee; and/or

38.3.3 Any other information to satisfy the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)** or the **Comptroller**, that this Chapter VIII and the Labor Law, as to the hours of employment and prevailing rates of wages and/or supplemental benefits, are being observed.

38.4 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 38.1 and/or 38.2 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

### ARTICLE 39. DUST HAZARDS

39.1 Should a harmful dust hazard be created in performing the **Work** of this **Contract**, for the elimination of which appliances or methods have been approved by the Board of Standards and Appeals of the City of New York, such appliances and methods shall be installed, maintained, and effectively operated during the continuance of such harmful dust hazard. Failure to comply with this provision after notice shall make this **Contract** voidable at the sole discretion of the **City**.

## CHAPTER IX PARTIAL AND FINAL PAYMENTS

### ARTICLE 40. CONTRACT PRICE

40.1 The **City** shall pay, and the **Contractor** agrees to accept, in full consideration for the **Contractor's** performance of the **Work** subject to the terms and conditions hereof, the lump sum price or unit prices for which this **Contract** was awarded, plus the amount required to be paid for any **Extra Work** ordered by the **Commissioner** under Article 25, less credit for any **Work** omitted pursuant to Article 29.

### ARTICLE 41. BID BREAKDOWN ON LUMP SUM

41.1 Within fifteen (15) **Days** after the commencement date specified in the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Resident Engineer**, the **Contractor** shall submit to the **Resident Engineer** a breakdown of its bid price, or of lump sums bid for items of the **Contract**, showing the various operations to be performed under the **Contract**, as directed in the progress schedule required under Article 9, and the value of each of such operations, the total of such items to equal the lump sum price bid. Said breakdown must be approved in writing by the **Resident Engineer**.

41.2 No partial payment will be approved until the **Contractor** submits a bid breakdown that is acceptable to the **Resident Engineer**.

41.3 The **Contractor** shall also submit such other information relating to the bid breakdown as directed by the **Resident Engineer**. Thereafter, the breakdown may be used only for checking the **Contractor's** applications for partial payments hereunder, but shall not be binding upon the **City**, the **Commissioner**, or the **Engineer** for any purpose whatsoever.

### ARTICLE 42. PARTIAL PAYMENTS

42.1 From time to time as the **Work** progresses satisfactorily, but not more often than once each calendar month (except where the **Commissioner** approves in writing the submission of invoices on a more frequent basis and for invoices relating to **Work** performed pursuant to a change order), the **Contractor** may submit to the **Engineer** a requisition for a partial payment in the prescribed form, which shall contain an estimate of the quantity and the fair value of the **Work** done during the payment period.

42.2 Partial payments may be made for materials, fixtures, and equipment in advance of their actual incorporation in the **Work**, as the **Commissioner** may approve, and upon the terms and conditions set forth in the General Conditions.

42.3 The **Contractor** shall also submit to the **Commissioner** in connection with every application for partial payment a verified statement in the form prescribed by the **Comptroller** setting forth the information required under Labor Law Section 220-a.

42.4 Within thirty (30) **Days** after receipt of a satisfactory payment application, and within sixty (60) **Days** after receipt of a satisfactory payment application in relation to **Work** performed pursuant to a change order, the **Engineer** will prepare and certify, and the **Commissioner** will approve, a voucher for a partial payment in the amount of such approved estimate, less any and all deductions authorized to be made by the **Commissioner** under the terms of this **Contract** or by **Law**.

#### ARTICLE 43. PROMPT PAYMENT

43.1 The Prompt Payment provisions of the **PPB Rules** in effect at the time of the bid will be applicable to payments made under this **Contract**. The provisions require the payment to the **Contractor** of interest on payments made after the required payment date, except as set forth in the **PPB Rules**.

43.2 The **Contractor** shall submit a proper invoice to receive payment, except where the **Contract** provides that the **Contractor** will be paid at predetermined intervals without having to submit an invoice for each scheduled payment.

43.3 Determination of interest due will be made in accordance with the **PPB Rules**.

43.4 If the **Contractor** is paid interest, the proportionate share(s) of that interest shall be forwarded by the **Contractor** to its **Subcontractor(s)**.

43.5 The **Contractor** shall pay each **Subcontractor** or **Materialman** not later than seven (7) **Days** after receipt of payment out of amounts paid to the **Contractor** by the **City** for **Work** performed by the **Subcontractor** or **Materialman** under this **Contract**.

43.5.1 If **Contractor** fails to make any payment to any **Subcontractor** or **Materialman** within seven (7) **Days** after receipt of payment by the **City** pursuant to this Article 43.5, then the **Contractor** shall pay interest on amounts due to such **Subcontractor** or **Materialman** at the rate of interest in effect on the date such payment is made by the **Contractor** computed in accordance with Section 756-b (1)(b) of the New York General Business Law. Accrual of interest shall commence on the **Day** immediately following the expiration of the seventh **Day** following receipt of payment by the **Contractor** from the **City** and shall end on the date on which payment is made.

43.6 The **Contractor** shall include in each of its subcontracts a provision requiring each **Subcontractor** to make payment to each of its **Subcontractors** or **Materialmen** for **Work** performed under this **Contract** in the same manner and within the same time period set forth above.

#### ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT

44.1 The **Contractor** shall submit with the **Substantial Completion** requisition:

44.1.1 A final verified statement of any pending Article 27 disputes in accordance with the **PPB Rules** and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) setting forth with respect to each

such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay.

44.1.1(a) With respect to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City Corporation Counsel** shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 44.1.1(a) is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor** upon acceptance of the **Substantial Completion** payment pursuant to this Article 44, will have waived any such claims.

44.1.2 **A Final Approved Punch List.**

44.1.3 Where required, a request for an extension of time to achieve **Substantial Completion** or final extension of time.

44.2 The **Commissioner** shall issue a voucher calling for payment of any part or all of the balance due for **Work** performed under the **Contract**, including monies retained under Article 21, less any and all deductions authorized to be made by the **Commissioner**, under this **Contract** or by **Law**, and less twice the amount the **Commissioner** considers necessary to ensure the completion of the balance of the **Work** by the **Contractor**. Such a payment shall be considered a partial and not a final payment. No **Substantial Completion** payment shall be made under this Article 44 where the **Contractor** failed to complete the **Work** within the time fixed for such completion in the Schedule A of the General Conditions, or within the time to which completion may have been extended, until an extension or extensions of time for the completion of **Work** have been acted upon pursuant to Article 13.

44.3 No further partial payments shall be made to the **Contractor** after **Substantial Completion**, except the **Substantial Completion** payment and payment pursuant to any **Contractor's** requisition that were properly filed with the **Commissioner** prior to the date of **Substantial Completion**; however, the **Commissioner** may grant a waiver for further partial payments after the date of **Substantial Completion** to permit payments for change order **Work** and/or release of retainage and deposits pursuant to Articles 21 and 24. Such waiver shall be in writing.

44.4 The **Contractor** acknowledges that nothing contained in this Article 44 is intended to or shall in any way diminish the force and effect of Article 13.

#### **ARTICLE 45. FINAL PAYMENT**

45.1 After completion and **Final Acceptance** of the **Work**, the **Contractor** shall submit all required certificates and documents, together with a requisition for the balance claimed to be due under the **Contract**, less the amount authorized to be retained for maintenance under Article 24. Such submission shall be within 90 days of the date of the **Commissioner's** written determination of **Final Acceptance**, or within such additional time as may be granted by the **Commissioner** in writing. If the **Contractor** fails to submit all required certificates and documents within the time allowed, no payment of the balance claimed shall be made to the **Contractor** and the **Contractor** shall be deemed to have forfeited its right to

payment of any balance claimed. A verified statement similar to that required in connection with applications for partial payments shall also be submitted to the **Commissioner**.

45.2 Amended Verified Statement of Claims: The **Contractor** shall also submit with the final requisition any amendments to the final verified statement of any pending dispute resolution procedures in accordance with the **PPB Rules** and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) that have occurred subsequent to **Substantial Completion**, setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each such item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay. With reference to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City Corporation Counsel** shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 45.2, is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor**, upon acceptance of the Final Payment pursuant to Article 46, will have waived any such claims.

45.3 Preparation of Final Voucher: Upon determining the balance due hereunder other than on account of claims, the **Engineer** will prepare and certify, for the **Commissioner's** approval, a voucher for final payment in that amount less any and all deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**. In the case of a lump sum **Contract**, the **Commissioner** shall certify the voucher for final payment within thirty (30) **Days** from the date of completion and acceptance of the **Work**, provided all requests for extensions of time have been acted upon.

45.3.1 All prior certificates and vouchers upon which partial payments were made, being merely estimates made to enable the **Contractor** to prosecute the **Work** more advantageously, shall be subject to correction in the final voucher, and the certification of the **Engineer** thereon and the approval of the **Commissioner** thereof, shall be conditions precedent to the right of the **Contractor** to receive any money hereunder. Such final voucher shall be binding and conclusive upon the **Contractor**.

45.3.2 Payment pursuant to such final voucher, less any deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**, shall constitute the final payment, and shall be made by the **Comptroller** within thirty (30) **Days** after the filing of such voucher in his/her office.

45.4 The **Contractor** acknowledges that nothing contained in this Article 45 is intended to or shall in any way diminish the force and effect of Article 13.

#### **ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT**

46.1 The acceptance by the **Contractor**, or by anyone claiming by or through it, of the final payment, whether such payment be made pursuant to any judgment of any court, or otherwise, shall constitute and operate as a release of the **City** from any and all claims of and liability to the **Contractor** for anything heretofore done or furnished for the **Contractor** relating to or arising out of this **Contract** and the **Work** done hereunder, and for any prior act, neglect or default on the part of the **City** or any of its officials, agents or employees, excepting only a claim against the **City** for the amounts deducted or retained in accordance with the terms and provisions of this **Contract** or by **Law**, and excepting any

claims, not otherwise waived, or any pending dispute resolution procedures which are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45.

46.2 The **Contractor** is warned that the execution by it of a release, in connection with the acceptance of the final payment, containing language purporting to reserve claims other than those herein specifically excepted from the operation of this Article 46, or those for amounts deducted by the **Commissioner** from the final requisition or from the final payment as certified by the **Engineer** and approved by the **Commissioner**, shall not be effective to reserve such claims, anything stated to the **Contractor** orally or in writing by any official, agent or employee of the **City** to the contrary notwithstanding.

46.3 Should the **Contractor** refuse to accept the final payment as tendered by the **Comptroller**, it shall constitute a waiver of any right to interest thereon.

46.4 The **Contractor**, however, shall not be barred by this Article 46 from commencing an action for breach of **Contract** to the extent permitted by **Law** and by the terms of the **Contract** for any claims that are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45 or that arose after submission of the final payment requisition, provided that a detailed and verified statement of claim is served upon the contracting **Agency** and **Comptroller** not later than forty (40) **Days** after the making of such final payment by electronic funds transfer (EFT) or the mailing of such final payment. The statement shall specify the items upon which the claim will be based and any such claim shall be limited to such items.

#### **ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION**

47.1 All works of art, including paintings, mural decorations, stained glass, statues, bas-reliefs, and other sculptures, monuments, fountains, arches, and other structures of a permanent character intended for ornament or commemoration, and every design of the same to be used in the performance of this **Contract**, and the design of all bridges, approaches, buildings, gates, fences, lamps, or structures to be erected, pursuant to the terms of this **Contract**, shall be submitted to the Art Commission, d/b/a the Public Design Commission of the City of New York, and shall be approved by the Public Design Commission prior to the erection or placing in position of the same. The final payment shall not become due or payable under this **Contract** unless and until the Public Design Commission shall certify that the design for the **Work** herein contracted for has been approved by the said Public Design Commission, and that the same has been executed in substantial accordance with the design so approved, pursuant to the provisions of Chapter 37, Section 854 of the **City Charter**, as amended.

### **CHAPTER X CONTRACTOR'S DEFAULT**

#### **ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT**

48.1 In addition to those instances specifically referred to in other Articles herein, the **Commissioner** shall have the right to declare the **Contractor** in default of this **Contract** if:

48.1.1 The **Contractor** fails to commence **Work** when notified to do so by the **Commissioner**; or  
if

48.1.2 The **Contractor** shall abandon the **Work**; or if



48.1.3 The **Contractor** shall refuse to proceed with the **Work** when and as directed by the **Commissioner**; or if

48.1.4 The **Contractor** shall, without just cause, reduce its working force to a number which, if maintained, would be insufficient, in the opinion of the **Commissioner**, to complete the **Work** in accordance with the progress schedule; or if

48.1.5 The **Contractor** shall fail or refuse to increase sufficiently such working force when ordered to do so by the **Commissioner**; or if

48.1.6 The **Contractor** shall sublet, assign, transfer, convert or otherwise dispose of this **Contract** other than as herein specified; or sell or assign a majority interest in the **Contractor**; or if

48.1.7 The **Contractor** fails to secure and maintain all required insurance; or if

48.1.8 A receiver or receivers are appointed to take charge of the **Contractor's** property or affairs; or if

48.1.9 The **Commissioner** shall be of the opinion that the **Contractor** is or has been unnecessarily or unreasonably or willfully delaying the performance and completion of the **Work**, or the award of necessary subcontracts, or the placing of necessary material and equipment orders; or if

48.1.10 The **Commissioner** shall be of the opinion that the **Contractor** is or has been willfully or in bad faith violating any of the provisions of this **Contract**; or if

48.1.11 The **Commissioner** shall be of the opinion that the **Work** cannot be completed within the time herein provided therefor or within the time to which such completion may have been extended; provided, however, that the impossibility of timely completion is, in the **Commissioner's** opinion, attributable to conditions within the **Contractor's** control; or if

48.1.12 The **Work** is not completed within the time herein provided therefor or within the time to which the **Contractor** may be entitled to have such completion extended; or if

48.1.13 Any statement or representation of the **Contractor** in the **Contract** or in any document submitted by the **Contractor** with respect to the **Work**, the **Project**, or the **Contract** (or for purposes of securing the **Contract**) was untrue or incorrect when made; or if

48.1.14 The **Contractor** or any of its officers, directors, partners, five (5%) percent shareholders, principals, or other persons substantially involved in its activities, commits any of the acts or omissions specified as the grounds for debarment in the **PPB Rules**.

48.2 Before the **Commissioner** shall exercise his/her right to declare the **Contractor** in default, the **Commissioner** shall give the **Contractor** an opportunity to be heard, upon not less than two (2) **Days** notice.

#### ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT

49.1 The right to declare the **Contractor** in default for any of the grounds specified or referred to in Article 48 shall be exercised by sending the **Contractor** a notice, signed by the **Commissioner**, setting forth the ground or grounds upon which such default is declared (hereinafter referred to as a "Notice of Default").

49.2 The **Commissioner's** determination that the **Contractor** is in default shall be conclusive, final, and binding on the parties and such a finding shall preclude the **Contractor** from commencing a plenary action for any damages relating to the **Contract**. If the **Contractor** protests the determination of the **Commissioner**, the **Contractor** may commence an action in a court of competent jurisdiction of the State of New York under Article 78 of the New York Civil Practice Law and Rules.

#### ARTICLE 50. QUITTING THE SITE

50.1 Upon receipt of such notice the **Contractor** shall immediately discontinue all further operations under this **Contract** and shall immediately quit the **Site**, leaving untouched all plant, materials, equipment, tools, and supplies then on the **Site**.

#### ARTICLE 51. COMPLETION OF THE WORK

51.1 The **Commissioner**, after declaring the **Contractor** in default, may then have the **Work** completed by such means and in such manner, by contract with or without public letting, or otherwise, as he/she may deem advisable, utilizing for such purpose such of the **Contractor's** plant, materials, equipment, tools, and supplies remaining on the **Site**, and also such **Subcontractors**, as he/she may deem advisable.

51.2 After such completion, the **Commissioner** shall make a certificate stating the expense incurred in such completion, which shall include the cost of re-letting and also the total amount of liquidated damages (at the rate provided for in the **Contract**) from the date when the **Work** should have been completed by the **Contractor** in accordance with the terms hereof to the date of actual completion of the **Work**. Such certificate shall be binding and conclusive upon the **Contractor**, its sureties, and any person claiming under the **Contractor**, as to the amount thereof.

51.3 The expense of such completion, including any and all related and incidental costs, as so certified by the **Commissioner**, and any liquidated damages assessed against the **Contractor**, shall be charged against and deducted out of monies which are earned by the **Contractor** prior to the date of default. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

#### ARTICLE 52. PARTIAL DEFAULT

52.1 In case the **Commissioner** shall declare the **Contractor** in default as to a part of the **Work** only, the **Contractor** shall discontinue such part, shall continue performing the remainder of the **Work** in strict conformity with the terms of this **Contract**, and shall in no way hinder or interfere with any **Other**

**Contractor(s)** or persons whom the **Commissioner** may engage to complete the **Work** as to which the **Contractor** was declared in default.

52.2 The provisions of this Chapter relating to declaring the **Contractor** in default as to the entire **Work** shall be equally applicable to a declaration of partial default, except that the **Commissioner** shall be entitled to utilize for completion of the part of the **Work** as to which the **Contractor** was declared in default only such plant, materials, equipment, tools, and supplies as had been previously used by the **Contractor** on such part.

#### ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK

53.1 In completing the whole or any part of the **Work** under the provisions of this Chapter X, the **Commissioner** shall have the power to depart from or change or vary the terms and provisions of this **Contract**, provided, however, that such departure, change or variation is made for the purpose of reducing the time or expense of such completion. Such departure, change or variation, even to the extent of accepting a lesser or different performance, shall not affect the conclusiveness of the **Commissioner's** certificate of the cost of completion referred to in Article 51, nor shall it constitute a defense to an action to recover the amount by which such certificate exceeds the amount which would have been payable to the **Contractor** hereunder but for its default.

#### ARTICLE 54. OTHER REMEDIES

54.1 In addition to the right to declare the **Contractor** in default pursuant to this Chapter X, the **Commissioner** shall have the absolute right, in his/her sole discretion and without a hearing, to complete or cause to be completed in the same manner as described in Articles 51 and 53, any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List**. A written notice of the exercise of this right shall be sent to the **Contractor** who shall immediately quit the **Site** in accordance with the provisions of Article 50.

54.2 The expense of completion permitted under Article 54.1, including any and all related and incidental costs, as so certified by the **Commissioner**, shall be charged against and deducted out of monies which have been earned by the **Contractor** prior to the date of the exercise of the right set forth in Article 54.1; the balance of such monies, if any, subject to the other provisions of this **Contract**, to be paid to the **Contractor** without interest after such completion. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

54.3 The previous provisions of this Chapter X shall be in addition to any and all other remedies available under **Law** or in equity.

54.4 The exercise by the **City** of any remedy set forth herein shall not be deemed a waiver by the **City** of any other legal or equitable remedy contained in this **Contract** or provided under **Law**.

CHAPTER XI  
MISCELLANEOUS PROVISIONS

ARTICLE 55. CONTRACTOR'S WARRANTIES

55.1 In consideration of, and to induce, the award of this **Contract** to the **Contractor**, the **Contractor** represents and warrants:

55.1.1 That it is financially solvent, sufficiently experienced and competent to perform the **Work**; and

55.1.2 That the facts stated in its bid and the information given by it pursuant to the **Information for Bidders** is true and correct in all respects; and

55.1.3 That it has read and complied with all requirements set forth in the **Contract**.

ARTICLE 56. CLAIMS AND ACTIONS THEREON

56.1 Any claim, that is not subject to dispute resolution under the **PPB Rules** or this **Contract**, against the **City** for damages for breach of **Contract** shall not be made or asserted in any action, unless the **Contractor** shall have strictly complied with all requirements relating to the giving of notice and of information with respect to such claims, as herein before provided.

56.2 Nor shall any action be instituted or maintained on any such claims unless such action is commenced within six (6) months after **Substantial Completion**; except that:

56.2.1 Any claims arising out of events occurring after **Substantial Completion** and before **Final Acceptance** of the **Work** shall be asserted within six (6) months of **Final Acceptance** of the **Work**;

56.2.2 Any claims for monies deducted, retained or withheld under the provisions of this **Contract** shall be asserted within six (6) months after the date when such monies otherwise become due and payable hereunder; and

56.2.3 If the **Commissioner** exercises his/her right to terminate the **Contract** pursuant to Article 64, any such action shall be commenced within six (6) months of the date the **Commissioner** exercises said right.

ARTICLE 57. INFRINGEMENT

57.1 The **Contractor** shall be solely responsible for and shall defend, indemnify, and hold the **City** harmless from any and all claims (even if the allegations of the lawsuit are without merit) and judgments for damages and from costs and expenses to which the **City** may be subject to or which it may suffer or incur allegedly arising out of or in connection with any infringement by the **Contractor** of any copyright, trade secrets, trademark or patent rights or any other property or personal right of any third party by the **Contractor** and/or its **Subcontractors** in the performance or completion of the **Work**. Insofar as the facts or **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent permitted by **Law**.

## ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES

58.1 No claim whatsoever shall be made by the **Contractor** against any official, agent or employee of the **City** for, or on account of, anything done or omitted to be done in connection with this **Contract**.

## ARTICLE 59. SERVICE OF NOTICES

59.1 The **Contractor** hereby designates the business address, fax number, and email address specified in its bid, as the place where all notices, directions or other communications to the **Contractor** may be delivered, or to which they may be mailed. Any notice, direction, or communication from either party to the other shall be in writing and shall be deemed to have been given when (i) delivered personally; (ii) sent by certified mail, return receipt requested; (iii) delivered by overnight or same day courier service in a properly addressed envelope with confirmation; or (iv) sent by fax or email and, unless receipt of the fax or e-mail is acknowledged by the recipient by fax or e-mail, deposited in a post office box regularly maintained by the United States Postal Service in a properly addressed, postage pre-paid envelope.

59.2 **Contractor's** notice address, email address, or fax number may be changed at any time by an instrument in writing, executed and acknowledged by the **Contractor**, and delivered to the **Commissioner**.

59.3 Nothing herein contained shall, however, be deemed to preclude or render inoperative the service of any notice, direction or other communication upon the **Contractor** personally, or, if the **Contractor** is a corporation, upon any officer thereof.

## ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT

60.1 If this **Contract** contains any unlawful provision not an essential part of the **Contract** and which shall not appear to have been a controlling or material inducement to the making thereof, the same shall be deemed of no effect and shall, upon notice by either party, be deemed stricken from the **Contract** without affecting the binding force of the remainder.

## ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED

61.1 It is the intent and understanding of the parties to this **Contract** that each and every provision of **Law** required to be inserted in this **Contract** shall be and is inserted herein. Furthermore, it is hereby stipulated that every such provision is to be deemed to be inserted herein, and if, through mistake or otherwise, any such provision is not inserted, or is not inserted in correct form, then this **Contract** shall forthwith upon the application of either party be amended by such insertion so as to comply strictly with the **Law** and without prejudice to the rights of either party hereunder.

## ARTICLE 62. TAX EXEMPTION

62.1 The **City** is exempt from payment of Federal, State, and local taxes, including sales and compensating use taxes of the State of New York and its cities and counties on all tangible personal property sold to the **City** pursuant to the provisions of this **Contract**. These taxes are not to be included in bids. However, this exemption does not apply to tools, machinery, equipment or other property leased by or to the **Contractor**, **Subcontractor** or **Materialman** or to tangible personal property which, even

though it is consumed, is not incorporated into the completed **Work** (consumable supplies) and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**. The **Contractor** and its **Subcontractors** and **Materialmen** shall be responsible for and pay any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property and upon all such consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**.

62.2 The **Contractor** agrees to sell and the **City** agrees to purchase all tangible personal property, other than consumable supplies and other tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**, that is required, necessary or proper for or incidental to the construction of the **Project** covered by this **Contract**. The sum paid under this **Contract** for such tangible personal property shall be in full payment and consideration for the sale of such tangible personal property.

62.2.1 The **Contractor** agrees to construct the **Project** and to perform all **Work**, labor and services rendered, necessary, proper or incidental thereto for the sum shown in the bid for the performance of such **Work**, labor, and services, and the sum so paid pursuant to this **Contract** for such **Work**, labor, and services, shall be in full consideration for the performance by the **Contractor** of all its duties and obligations under this **Contract** in connection with said **Work**, labor, and services.

62.3 20 NYCRR Section 541.3(d) provides that a **Contractor's** purchases of tangible personal property that is either incorporated into real property owned by a governmental entity or purchased for and sold to a governmental entity are exempt from sales and use tax. The **City** shall not pay sales tax for any such tangible personal property that it purchases from the **Contractor** pursuant to the **Contract**. With respect to such tangible personal property, the **Contractor**, at the request of the **City**, shall furnish to the **City** such bills of sale and other instruments as may be required by the **City**, properly executed, acknowledged and delivered assuring to the **City** title to such tangible personal property, free of liens and/or encumbrances, and the **Contractor** shall mark or otherwise identify all such tangible personal property as the property of the **City**.

62.4 Title to all tangible personal property to be sold by the **Contractor** to the **City** pursuant to the provisions of the **Contract** shall immediately vest in and become the sole property of the **City** upon delivery of such tangible personal property to the **Site**. Notwithstanding such transfer of title, the **Contractor** shall have the full and continuing responsibility to install such tangible personal property in accordance with the provisions of this **Contract**, protect it, maintain it in a proper condition and forthwith repair, replace and make good any damage thereto, theft or disappearance thereof, and furnish additional tangible personal property in place of any that may be lost, stolen or rendered unusable, without cost to the **City**, until such time as the **Work** covered by the **Contract** is fully accepted by the **City**. Such transfer of title shall in no way affect any of the **Contractor's** obligations hereunder. In the event that, after title has passed to the **City**, any of the tangible personal property is rejected as being defective or otherwise unsatisfactory, title to all such tangible personal property shall be deemed to have been transferred back to the **Contractor**.

62.5 The purchase by **Subcontractors** or **Materialmen** of tangible personal property to be sold hereunder shall be a purchase or procurement for resale to the **Contractor** (either directly or through other **Subcontractors**) and therefore not subject to the aforesaid sales and compensating use taxes, provided that the subcontracts and purchase agreements provide for the resale of such tangible personal property and that such subcontracts and purchase agreements are in a form similar to this **Contract** with respect to the separation of the sale of consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work** from the **Work** and labor, services, and any other matters to be provided, and provided further that the subcontracts and

purchase agreements provide separate prices for tangible personal property and all other services and matters. Such separation shall actually be followed in practice, including the separation of payments for tangible personal property from the payments for other **Work** and labor and other things to be provided.

62.6 The **Contractor** and its **Subcontractors** and **Materialmen** shall furnish a **Contractor Exempt Purchase Certificate** to all persons, firms or corporations from which they purchase tangible personal property for the performance of the **Work** covered by this **Contract**.

62.7 In the event any of the provisions of this Article 62 shall be deemed to be in conflict with any other provisions of this **Contract** or create any ambiguity, then the provisions of this Article 62 shall control.

### ARTICLE 63. INVESTIGATION(S) CLAUSE

63.1 The parties to this **Contract** agree to cooperate fully and faithfully with any investigation, audit or inquiry conducted by a **United States**, a **State of New York (State)** or a **City** governmental agency or authority that is empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath, or conducted by the **Inspector General** of a governmental agency that is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit or license that is the subject of the investigation, audit or inquiry.

63.2 If any person who has been advised that his/her statement, and any information from such statement, will not be used against him/her in any subsequent criminal proceeding refuses to testify before a grand jury or other governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath concerning the award of or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the **State**, or any political subdivision or public authority thereof, or the **Port Authority of New York and New Jersey**, or any local development corporation within the **City**, or any public benefit corporation organized under the **Laws** of the **State of New York**, or;

63.3 If any person refuses to testify for a reason other than the assertion of his/her privilege against self incrimination in an investigation, audit or inquiry conducted by a **City** or **State** governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to take testimony under oath, or by the **Inspector General** of the governmental agency that is a party in interest in, and is seeking testimony concerning the award of, or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the **State**, or any political subdivision thereof or any local development corporation within the **City**, then;

63.4 The **Commissioner** whose **Agency** is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit, or license shall convene a hearing, upon not less than five (5) **Days'** written notice to the parties involved to determine if any penalties should attach for the failure of a person to testify.

63.5 If any non-governmental party to the hearing requests an adjournment, the **Commissioner** who convened the hearing may, upon granting the adjournment, suspend any contract, lease, permit, or license, pending the final determination pursuant to Article 63.7 without the **City** incurring any penalty or damages for delay or otherwise.

63.6 The penalties which may attach after a final determination by the **Commissioner** may include but shall not exceed:

63.6.1 The disqualification for a period not to exceed five (5) years from the date of an adverse determination for any person, or any entity of which such person was a member at the time the testimony was sought, from submitting bids for, or transacting business with, or entering into or obtaining any contract, lease, permit or license with or from the City; and/or

63.6.2 The cancellation or termination of any and all such existing City contracts, leases, permits or licenses that the refusal to testify concerns and that have not been assigned as permitted under this Contract, nor the proceeds of which pledged, to an unaffiliated and unrelated institutional lender for fair value prior to the issuance of the notice scheduling the hearing, without the City incurring any penalty or damages on account of such cancellation or termination; monies lawfully due for goods delivered, work done, rentals, or fees accrued prior to the cancellation or termination shall be paid by the City.

63.7 The Commissioner shall consider and address in reaching his/her determination and in assessing an appropriate penalty the factors in Articles 63.7.1 and 63.7.2. The Commissioner may also consider, if relevant and appropriate, the criteria established in Articles 63.7.3 and 63.7.4, in addition to any other information which may be relevant and appropriate:

63.7.1 The party's good faith endeavors or lack thereof to cooperate fully and faithfully with any governmental investigation or audit, including but not limited to the discipline, discharge, or disassociation of any person failing to testify, the production of accurate and complete books and records, and the forthcoming testimony of all other members, agents, assignees or fiduciaries whose testimony is sought.

63.7.2 The relationship of the person who refused to testify to any entity that is a party to the hearing, including but not limited to, whether the person whose testimony is sought has an ownership interest in the entity and/or the degree of authority and responsibility the person has within the entity.

63.7.3 The nexus of the testimony sought to the subject entity and its contracts, leases, permits or licenses with the City.

63.7.4 The effect a penalty may have on an unaffiliated and unrelated party or entity that has a significant interest in an entity subject to penalties under Article 63.6, provided that the party or entity has given actual notice to the Commissioner upon the acquisition of the interest, or at the hearing called for in Article 63.4, gives notice and proves that such interest was previously acquired. Under either circumstance the party or entity shall present evidence at the hearing demonstrating the potential adverse impact a penalty will have on such person or entity.

#### 63.8 Definitions:

63.8.1 The term "license" or "permit" as used in this Article 63 shall be defined as a license, permit, franchise or concession not granted as a matter of right.

63.8.2 The term "person" as used in this Article 63 shall be defined as any natural person doing business alone or associated with another person or entity as a partner, director, officer, principal or employee.

63.8.3 The term "entity" as used in this Article 63 shall be defined as any firm, partnership, corporation, association, joint venture, or person that receives monies, benefits, licenses, leases, or permits from or through the City or otherwise transacts business with the City.



63.8.4 The term "member" as used in this Article 63 shall be defined as any person associated with another person or entity as a partner, director, officer, principal or employee.

63.9 In addition to and notwithstanding any other provision of this **Contract**, the **Commissioner** may in his/her sole discretion terminate this **Contract** upon not less than three (3) **Days**' written notice in the event the **Contractor** fails to promptly report in writing to the **Commissioner** of the Department of Investigations ("DOI") of the **City** any solicitation of money, goods, requests for future employment or other benefit or thing of value, by or on behalf of any employee of the **City** or other person, firm, corporation or entity for any purpose which may be related to the procurement or obtaining of this **Contract** by the **Contractor**, or affecting the performance of this **Contract**.

#### **ARTICLE 64. TERMINATION BY THE CITY**

64.1 In addition to termination pursuant to any other article of this **Contract**, the **Commissioner** may, at any time, terminate this **Contract** by written notice to the **Contractor**. In the event of termination, the **Contractor** shall, upon receipt of such notice, unless otherwise directed by the **Commissioner**:

64.1.1 Stop **Work** on the date specified in the notice;

64.1.2 Take such action as may be necessary for the protection and preservation of the **City's** materials and property;

64.1.3 Cancel all cancelable orders for material and equipment;

64.1.4 Assign to the **City** and deliver to the **Site** or another location designated by the **Commissioner**, any non-cancelable orders for material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract** and not incorporated in the **Work**;

64.1.5 Take no action which will increase the amounts payable by the **City** under this **Contract**.

64.2 In the event of termination by the **City** pursuant to this Article 64, payment to the **Contractor** shall be in accordance with Articles 64.2.1, 64.2.2 or 64.2.3, to the extent that each respective article applies.

64.2.1 Lump Sum Contracts or Items: On all lump sum **Contracts**, or on lump sum items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.1(a) and 64.2.1(b), less all payments previously made pursuant to this **Contract**. On lump sum **Contracts** only, the **City** will also pay the **Contractor** an additional sum as provided in Article 64.2.1(c).

64.2.1(a) For **Work** completed prior to the notice of termination, the **Contractor** shall be paid a pro rata portion of the lump sum bid amount, plus approved change orders, based upon the percent completion of the **Work**, as determined by the **Commissioner**. For the purpose of determining the pro rata portion of the lump sum bid amount to which the **Contractor** is entitled, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be dispositive. The **Commissioner's** determination hereunder shall be final, binding, and conclusive.

64.2.1(b) For non-cancelable material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated in the **Work**, the **Contractor** shall be paid the lesser of the following, less salvage value:

64.2.1(b)(i) The Direct Cost, as defined in Article 64.2.4; or

64.2.1(b)(ii) The fair and reasonable value, if less than Direct Cost, of such material and equipment, plus necessary and reasonable delivery costs.

64.2.1(b)(iii) In addition, the **Contractor** shall be paid five (5%) percent of the amount described in Article 64.2.1(b)(i) or Article 64.2.1(b)(ii), whichever applies.

64.2.1(c) Except as otherwise provided in Article 64.2.1(d), on all lump sum **Contracts**, the **Contractor** shall be paid the percentage indicated below applied to the difference between the total lump sum bid amount and the total of all payments made prior to the notice of termination plus all payments allowed pursuant to Articles 64.2.1(a) and 64.2.1(b):

64.2.1(c)(i) Five (5%) percent of the first five million (\$5,000,000) dollars; and

64.2.1(c)(ii) Three (3%) percent of any amount between five million (\$5,000,000) dollars and fifteen million (\$15,000,000) dollars; plus

64.2.1(c)(iii) One (1%) percent of any amount over fifteen million (\$15,000,000) dollars.

64.2.1(d) In the event the **City** terminates a lump sum **Contract** pursuant to this Article 64 within ninety (90) **Days** after registration of the **Contract** with the **Comptroller**, the **Contractor** shall be paid one (1%) percent of the difference between the lump sum bid amount and the total of all payments made pursuant to this Article 64.2.

64.2.2 Unit Price Contracts or Items: On all unit price **Contracts**, or on unit price items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.2(a) and 64.2.2(b), less all payments previously made pursuant to this **Contract**:

64.2.2(a) For all completed units, the unit price stated in the **Contract**, and

64.2.2(b) For units that have been ordered but are only partially completed, the **Contractor** will be paid:

64.2.2(b)(i) A pro rata portion of the unit price stated in the **Contract** based upon the percent completion of the unit and

64.2.2(b)(ii) For non-cancelable material and equipment, payment will be made pursuant to Article 64.2.1(b).

64.2.3 Time and Materials Contracts or Items Based on Time and Material Records: On all **Contracts** or items in a **Contract** where payment for the **Work** is based on time and

material records, the **Contractor** shall be paid in accordance with Article 26, less all payments previously made pursuant to this **Contract**.

64.2.4 Direct Costs: Direct Costs as used in this Article 64.2 shall mean:

64.2.4(a) The actual purchase price of material and equipment, plus necessary and reasonable delivery costs,

64.2.4(b) The actual cost of labor involved in construction and installation at the **Site**, and

64.2.4(c) The actual cost of necessary bonds and insurance purchased pursuant to requirements of this **Contract** less any amounts that have been or should be refunded by the **Contractor's** sureties or insurance carriers.

64.2.4(d) Direct Costs shall not include overhead.

64.3 In no event shall any payments under this Article 64 exceed the **Contract** price for such items.

64.4 All payments pursuant to Article 64 shall be in the nature of liquidated damages and shall be accepted by the **Contractor** in full satisfaction of all claims against the **City**.

64.5 The **City** may deduct or set off against any sums due and payable pursuant to this Article 64, any deductions authorized by this **Contract** or by **Law** (including but not limited to liquidated damages) and any claims it may have against the **Contractor**. The **City's** exercise of the right to terminate the **Contract** pursuant to this Article 64 shall not impair or otherwise effect the **City's** right to assert any claims it may have against the **Contractor** in a plenary action.

64.6 Where the **Work** covered by the **Contract** has been substantially completed, as determined in writing by the **Commissioner**, termination of the **Work** shall be handled as an omission of **Work** pursuant to Articles 29 and 33, in which case a change order will be issued to reflect an appropriate reduction in the **Contract** sum, or if the amount is determined after final payment, such amount shall be paid by the **Contractor**.

#### **ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE**

65.1 This **Contract** shall be deemed to be executed in the **City** regardless of the domicile of the **Contractor**, and shall be governed by and construed in accordance with the **Laws** of the State of New York and the **Laws** of the United States, where applicable.

65.2 The parties agree that any and all claims asserted against the **City** arising under this **Contract** or related thereto shall be heard and determined in the courts of the State of New York ("New York State Courts") located in the **City** and County of New York. To effect this **Contract** and intent, the **Contractor** agrees:

65.2.1 If the **City** initiates any action against the **Contractor** in Federal court or in a New York State Court, service of process may be made on the **Contractor** either in person, wherever such **Contractor** may be found, or by registered mail addressed to the **Contractor** at its address as set forth in this **Contract**, or to such other address as the **Contractor** may provide to the **City** in writing; and

65.2.2 With respect to any action between the **City** and the **Contractor** in a New York State Court, the **Contractor** hereby expressly waives and relinquishes any rights it might otherwise have:

65.2.2(a) To move to dismiss on grounds of forum non conveniens;

65.2.2(b) To remove to Federal Court; and

65.2.2(c) To move for a change of venue to a New York State Court outside New York County.

65.2.3 With respect to any action brought by the **City** against the **Contractor** in a Federal Court located in the **City**, the **Contractor** expressly waives and relinquishes any right it might otherwise have to move to transfer the action to a Federal Court outside the **City**.

65.2.4 If the **Contractor** commences any action against the **City** in a court located other than in the **City** and County of New York, upon request of the **City**, the **Contractor** shall either consent to a transfer of the action to a New York State Court of competent jurisdiction located in the **City** and County of New York or, if the Court where the action is initially brought will not or cannot transfer the action, the **Contractor** shall consent to dismiss such action without prejudice and may thereafter reinstate the action in a New York State Court of competent jurisdiction in New York County.

65.3 If any provision(s) of this Article 65 is held unenforceable for any reason, each and all other provision(s) shall nevertheless remain in full force and effect.

#### **ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT**

66.1 The **Contractor** agrees that neither the **Contractor** nor any substantially owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the Federal Export Administration Act of 1979, as amended, or the regulations of the United States Department of Commerce (Commerce Department) promulgated thereunder.

66.2 Upon the final determination by the Commerce Department or any other agency of the United States as to, or conviction of the **Contractor** or a substantially-owned affiliated company thereof for participation in an international boycott in violation of the provisions of the Export Administration Act of 1979, as amended, or the regulations promulgated thereunder, the **Comptroller** may, at his/her option, render forfeit and void this **Contract**.

66.3 The **Contractor** shall comply in all respects, with the provisions of Section 6-114 of the Administrative Code and the rules and regulations issued by the **Comptroller** thereunder.

#### **ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM**

67.1 This **Contract** is subject to the requirements of Section 6-108.1 of the Administrative Code and regulations promulgated thereunder. No construction contract shall be awarded unless and until these requirements have been complied with in their entirety; however, compliance with this Article 67 is not required if the Agency sets Subcontractor Participation Goals for Minority- and Women-Owned Business Enterprises (M/WBES).

67.2 Unless specifically waived by the **Commissioner** with the approval of the Division of Economic and Financial Opportunity of the City Department of Business Services, if any portion of the **Contract** is subcontracted, not less than ten (10%) percent of the total dollar amount of the **Contract** shall be awarded to locally based enterprises (LBEs); except that where less than ten (10%) percent of the total dollar amount of the **Contract** is subcontracted, such lesser percentage shall be so awarded.

67.3 The **Contractor** shall not require performance and payment bonds from LBE **Subcontractors**.

67.4 If the **Contractor** has indicated prior to award that no **Work** will be subcontracted, no **Work** shall be subcontracted without the prior approval of the **Commissioner**, which shall be granted only if the **Contractor** makes a good faith effort beginning at least six (6) weeks before the **Work** is to be performed to obtain LBE **Subcontractors** to perform the **Work**.

67.5 If the **Contractor** has not identified sufficient LBE **Subcontractors** prior to award, it shall sign a letter of compliance stating that it complies with Section 6-108.1 of the Administrative Code, recognizes that achieving the LBE requirement is a condition of its **Contract**, and shall submit documentation demonstrating its good faith efforts to obtain LBEs. After award, the **Contractor** shall begin to solicit LBE's to perform subcontracted **Work** at least six (6) weeks before the date such **Work** is to be performed and shall demonstrate that a good faith effort has been made to obtain LBEs on each subcontract until it meets the required percentage.

67.6 Failure of the **Contractor** to comply with the requirements of Section 6-108.1 of the Administrative Code and the regulations promulgated thereunder shall constitute a material breach of this **Contract**. Remedy for such breach may include the imposition of any or all of the following sanctions:

67.6.1 Reducing the **Contractor's** compensation by an amount equal to the dollar value of the percentage of the LBE subcontracting requirement not complied with;

67.6.2 Declaring the **Contractor** in default;

67.6.3 If the **Contractor** is an LBE, de-certifying and declaring the **Contractor** ineligible to participate in the LBE program for a period of up to three (3) years.

#### ARTICLE 68. ANTITRUST

68.1 The **Contractor** hereby assigns, sells, and transfers to the **City** all right, title, and interest in and to any claims and causes of action arising under the antitrust **Laws** of New York State or of the United States relating to the particular goods or services purchased or procured by the **City** under this **Contract**.

#### ARTICLE 69. MacBRIDE PRINCIPLES PROVISIONS

69.1 Notice To All Prospective **Contractors**:

69.1.1 Local Law No. 34 of 1991 became effective on September 10, 1991 and added Section 6-115.1 of the Administrative Code. The local **Law** provides for certain restrictions on **City Contracts** to express the opposition of the people of the **City** to employment discrimination practices in Northern Ireland to promote freedom of work-place opportunity.

69.1.2 Pursuant to Section 6-115.1, prospective **Contractors** for **Contracts** to provide goods or services involving an expenditure of an amount greater than ten thousand

(\$10,000.) dollars, or for construction involving an amount greater than fifteen thousand (\$15,000.) dollars, are asked to sign a rider in which they covenant and represent, as a material condition of their **Contract**, that any business operations in Northern Ireland conducted by the **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** will be conducted in accordance with the MacBride Principles of nondiscrimination in employment.

69.1.3 Prospective **Contractors** are not required to agree to these conditions. However, in the case of **Contracts** let by competitive sealed bidding, whenever the lowest responsible bidder has not agreed to stipulate to the conditions set forth in this notice and another bidder who has agreed to stipulate to such conditions has submitted a bid within five (5%) percent of the lowest responsible bid for a **Contract** to supply goods, services or construction of comparable quality, the **Agency** shall refer such bids to the Mayor, the Speaker or other officials, as appropriate, who may determine, in accordance with applicable **Law**, that it is in the best interest of the **City** that the **Contract** be awarded to other than the lowest responsible pursuant to Section 313(b)(2) of the **City Charter**.

69.1.4 In the case of **Contracts** let by other than competitive sealed bidding, if a prospective **Contractor** does not agree to these conditions, no **Agency**, elected official or the **City Council** shall award the **Contract** to that bidder unless the **Agency** seeking to use the goods, services or construction certifies in writing that the **Contract** is necessary for the **Agency** to perform its functions and there is no other responsible **Contractor** who will supply goods, services or construction of comparable quality at a comparable price.

69.2 In accordance with Section 6-115.1 of the Administrative Code, the **Contractor** stipulates that such **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** either:

69.2.1 Have no business operations in Northern Ireland, or

69.2.2 Shall take lawful steps in good faith to conduct any business operations they have in Northern Ireland in accordance with the MacBride Principles, and shall permit independent monitoring of their compliance with such principles.

69.3 For purposes of this Article, the following terms shall have the following meanings:

69.3.1 "MacBride Principles" shall mean those principles relating to nondiscrimination in employment and freedom of work-place opportunity which require employers doing business in Northern Ireland to:

69.3.1(a) increase the representation of individuals from under-represented religious groups in the workforce, including managerial, supervisory, administrative, clerical and technical jobs;

69.3.1(b) take steps to promote adequate security for the protection of employees from under-represented religious groups both at the work-place and while traveling to and from **Work**;

69.3.1(c) ban provocative religious or political emblems from the workplace;

69.3.1(d) publicly advertise all job openings and make special recruitment efforts to attract applicants from under-represented religious groups;

69.3.1(e) establish layoff, recall, and termination procedures which do not in practice favor a particular religious group;

69.3.1(f) abolish all job reservations, apprenticeship restrictions and different employment criteria which discriminate on the basis of religion;

69.3.1(g) develop training programs that will prepare substantial numbers of current employees from under-represented religious groups for skilled jobs, including the expansion of existing programs and the creation of new programs to train, upgrade, and improve the skills of workers from under-represented religious groups;

69.3.1(h) establish procedures to assess, identify, and actively recruit employees from under-represented religious groups with potential for further advancement; and

69.3.1(i) appoint a senior management staff member to oversee affirmative action efforts and develop a timetable to ensure their full implementation.

69.4 The **Contractor** agrees that the covenants and representations in Article 69.2 are material conditions to this **Contract**. In the event the **Agency** receives information that the **Contractor** who made the stipulation required by this Article 69 is in violation thereof, the **Agency** shall review such information and give the **Contractor** an opportunity to respond. If the **Agency** finds that a violation has occurred, the **Agency** shall have the right to declare the **Contractor** in default and/or terminate this **Contract** for cause and procure supplies, services or **Work** from another source in the manner the **Agency** deems proper. In the event of such termination, the **Contractor** shall pay to the **Agency**, or the **Agency** in its sole discretion may withhold from any amounts otherwise payable to the **Contractor**, the difference between the **Contract** price for the uncompleted portion of this **Contract** and the cost to the **Agency** of completing performance of this **Contract** either itself or by engaging another **Contractor** or **Contractors**. In the case of a requirement **Contract**, the **Contractor** shall be liable for such difference in price for the entire amount of supplies required by the **Agency** for the uncompleted term of **Contractor's Contract**. In the case of a construction **Contract**, the **Agency** shall also have the right to hold the **Contractor** in partial or total default in accordance with the default provisions of this **Contract**, and/or may seek debarment or suspension of the **Contractor**. The rights and remedies of the **Agency** hereunder shall be in addition to, and not in lieu of, any rights and remedies the **Agency** has pursuant to this **Contract** or by operation of Law.

#### **ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB**

70.1 The **Contractor** shall electronically file all alteration type-2 and alteration type-3 applications via the New York City Development Hub Web site, except applications for the following types of minor alterations: enlargements, curb cuts, legalizations, fire alarms, builders pavement plans, and jobs filed on Landmark Preservation Commission calendared properties. All such filings must be professionally certified. Information about electronic filing via the New York City Development Hub is available on the City Department of Buildings Web site at [www.nyc.gov/buildings](http://www.nyc.gov/buildings).

#### **ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS**

71.1 Tropical hardwoods, as defined in Section 165 of the New York State Finance Law (Finance Law), shall not be utilized in the performance of this **Contract** except as expressly permitted by Section 165 of the Finance Law.

ARTICLE 72. CONFLICTS OF INTEREST

72.1 Section 2604 of the City Charter and other related provisions of the City Charter, the Administrative Code, and the Penal Law are applicable under the terms of this Contract in relation to conflicts of interest and shall be extended to Subcontractors authorized to perform Work, labor and services pursuant to this Contract and further, it shall be the duty and responsibility of the Contractor to so inform its respective Subcontractors. Notice is hereby given that, under certain circumstances, penalties may be invoked against the donor as well as the recipient of any form of valuable gift.

ARTICLE 73. MERGER CLAUSE

73.1 The written Contract herein, contains all the terms and conditions agreed upon by the parties hereto, and no other agreement, oral or otherwise, regarding the subject matter of this Contract shall be deemed to exist or to bind any of the parties hereto, or to vary any of the terms contained herein.

ARTICLE 74. STATEMENT OF WORK

74.1 The Contractor shall furnish all labor and materials and perform all Work in strict accordance with the Specifications and Addenda thereto, numbered 6.

ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR

75.1 The City will pay and the Contractor will accept in full consideration for the performance of the Contract, subject to additions and deductions as provided herein, the total sum of Eight million two hundred eighty one thousand nine hundred twenty seven dollars Dollars, (\$ 8,281,927.00 ), this said sum being the amount at which the Contract was awarded to the Contractor at a public letting thereof, based upon the Contractor's bid for the Contract.

ARTICLE 76. ELECTRONIC FUNDS TRANSFER

76.1 In accordance with Section 6-107.1 of the Administrative Code, the Contractor agrees to accept payments under this Contract from the City by electronic funds transfer (EFT). An EFT is any transfer of funds, other than a transaction originated by check, draft or similar paper instrument, which is initiated through an electronic terminal, telephonic instrument or computer or magnetic tape so as to order, instruct or authorize a financial institution to debit or credit an account. Prior to the first payment made under this Contract, the Contractor shall designate one financial institution or other authorized payment agent and shall complete the attached "EFT Vendor Payment Enrollment Form" in order to provide the Commissioner of the City Department of Finance with information necessary for the Contractor to receive electronic funds transfer payments through a designated financial institution or authorized payment agent. The crediting of the amount of a payment to the appropriate account on the books of a financial institution or other authorized payment agent designated by the Contractor shall constitute full satisfaction by the City for the amount of the payment under this Contract. The account information supplied by the Contractor to facilitate the electronic funds transfer shall remain confidential to the fullest extent provided by Law.

76.2 The Commissioner may waive the application of the requirements of this Article 76 to payments on contracts entered into pursuant to Section 315 of the City Charter. In addition, the Commissioner of the Department of Finance and the Comptroller may jointly issue standards pursuant to



which the Agency may waive the requirements of this Article 76 for payments in the following circumstances: (i) for individuals or classes of individuals for whom compliance imposes a hardship; (ii) for classifications of types of checks; or (iii) in other circumstances as may be necessary in the interest of the City.

#### ARTICLE 77. RECORDS RETENTION

77.1 The Contractor agrees to retain all books, records, and other documents relevant to this Contract for six years after the final payment or termination of this Contract, whichever is later. City, state, and federal auditors and any other persons duly authorized by the City shall have full access to and the right to examine any such books, records, and other documents during the retention period.

#### ARTICLE 78. PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS ENTERPRISES IN CITY PROCUREMENT

##### NOTICE TO ALL PROSPECTIVE CONTRACTORS

#### ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

#### PART A

#### PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The MBE and/or WBE Participation Goals established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The Participation Goals represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If Participation Goals have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the Participation

Goals, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed nonresponsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. **THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER**

ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multiyear contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.**

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at [www.nyc.gov/buycertified](http://www.nyc.gov/buycertified), by emailing DSBS at [buyer@sbs.nyc.gov](mailto:buyer@sbs.nyc.gov), by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting [www.nyc.gov/getcertified](http://www.nyc.gov/getcertified), emailing [MWBE@sbs.nyc.gov](mailto:MWBE@sbs.nyc.gov), or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to: the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's M/WBE Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its M/WBE Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an M/WBE Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which

requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at [poped@ddc.nyc.gov](mailto:poped@ddc.nyc.gov) or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the **Participation Goals** to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the **Participation Goals**. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. **Modification of M/WBE Utilization Plan.** (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission.** The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the **Participation Goals**. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;

- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

#### **PART B: MISCELLANEOUS**

1. The Contractor shall take notice that, if this solicitation requires the establishment of an M/WBE Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the M/WBE Utilization Plan.

2. Pursuant to DSBS rules, construction contracts that include a requirement for an M/WBE Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.

3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.

4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).

5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

#### **ARTICLE II. ENFORCEMENT**

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.

2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE** Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.

3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE** Utilization Plan, Agency may determine that one of the following actions should be taken:

- (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
- (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
- (c) making a finding that the Contractor is in default of the Contract;
- (d) terminating the Contract;
- (e) declaring the Contractor to be in breach of Contract;
- (f) withholding payment or reimbursement;
- (g) determining not to renew the Contract;
- (h) assessing actual and consequential damages;
- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the **M/WBE** Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

IN WITNESS WHEREOF, the Commissioner, on behalf of the City of New York, and the Contractor, have executed this agreement in quadruplicate, two parts of which are to remain with the Commissioner, another to be filed with the Comptroller of the City, and the fourth to be delivered to the Contractor.

THE CITY OF NEW YORK

By:   
Deputy Commissioner

CONTRACTOR: JR Cruz Corp.

By:   
(Member of Firm or Officer of Corporation)

Title: SECRETARY

(Where Contractor is a Corporation, add):  
Attest:

  
Secretary


(Seal)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Queens ss:

On this 18 day of FEBRUARY, before me personally came MATHEW CRUZ to me known, who, being by me duly sworn did depose and say that he resides at LINCROFT, NJ that he is the SECRETARY

of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

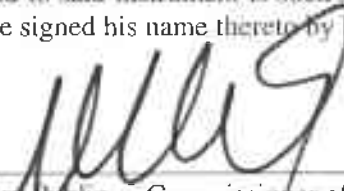  
\_\_\_\_\_  
Notary Public or Commissioner of Deeds

VICTORIA AYO-VAUGHAN  
Notary Public, State of New York  
Registration #01AY5014042  
Qualified in Queens County  
Commission Expires July 15, 2018

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known, and known to me to be one of the members of the firm of \_\_\_\_\_ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.


\_\_\_\_\_  
Notary Public or Commissioner of Deeds



ACKNOWLEDGMENT BY COMMISSIONER

State of New York County of Queens ss:

On this 19<sup>th</sup> day of February 2015, before me personally came Eric MacFarlane to me known, and known to be the Deputy Commissioner of the Department of Design and Construction of The City of New York, the person described as such in and who as such executed the foregoing instrument and he acknowledged to me that he executed the same as Deputy Commissioner for the purposes therein mentioned.

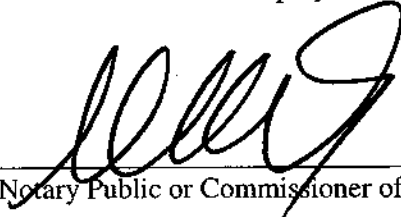  
\_\_\_\_\_  
Notary Public or Commissioner of Deeds

VICTORIA AYO-VAUGHAN  
Notary Public, State of New York  
Registration #01AY5014042  
Qualified in Queens County  
Commission Expires July 15, 2015

AUTHORITY

MAYOR'S CERTIFICATE NO. CBX  
BUDGET DIRECTOR'S CERTIFICATE NO.

DATED  
DATED

APPROPRIATION  
COMMISSIONER'S CERTIFICATE

In conformity with the provisions of Section 6-101 of the Administrative Code of the City of New York, it is hereby certified that the estimated cost of the work, materials and supplies required by the within Contract, amounting to

*Eight million two hundred  
eighty one thousand nine hundred  
twenty seven dollars*

Dollars (\$ 8,281,927.00 )

is chargeable to the fund of the Department of Design and Construction entitled Code

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Department of Design and Construction

I hereby certify that the specifications contained herein comply with the terms and conditions of the BUDGET.

*[Signature]*  
\_\_\_\_\_  
Deputy Commissioner

COMPTROLLER'S CERTIFICATE

The City of New York \_\_\_\_\_

Pursuant to the provisions of Section 6-101 of the Administrative Code of the City of New York, I hereby certify that there remains unapplied and unexpended a balance of the above mentioned fund applicable to this Contract sufficient to pay the estimated expense of executing the same viz:

\$ \_\_\_\_\_

\_\_\_\_\_  
Comptroller

**MAYOR'S CERTIFICATE OR  
CERTIFICATE OF THE DIRECTOR  
OF THE BUDGET**

**Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.**

PERFORMANCE BOND #1 (Page 1)

PERFORMANCE BOND #1

KNOW ALL PERSONS BY THESE PRESENTS, That we, \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Principal", and \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

(\$ \_\_\_\_\_) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

**Performance Bond #2 (Pages 96 to 99): Use if the total contract price is more than \$5 Million.**

Bond No. 015047206

PERFORMANCE BOND #2 (Page 1)

**PERFORMANCE BOND #2**

**KNOW ALL PERSONS BY THESE PRESENTS:,**

That we, \_\_\_\_\_

JRCruz Corp.

675 Line Road, Aberdeen, NJ 07747

hereinafter referred to as the "Principal,"  
and, \_\_\_\_\_

Liberty Mutual Insurance Company

1200 MacArthur Blvd., Mahwah, NJ 07430

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns in the penal sum of \_\_\_\_\_

Eight Million Two Hundred Eighty One Thousand Nine Hundred Twenty Seven Dollars and No/100

\_\_\_\_\_ (\$ 8,281,927.00) Dollars, lawful money of the United States for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

**WHEREAS**, the Principal is about to enter, or has entered, into a Contract in writing with the City for  
Historic Richmond Town Utilities Upgrade - Borough of Staten Island

DDC Pin: 8502014PV0026C / E-Pin: 85014B0165001

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

**NOW, THEREFORE**, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making

Performance Bond #2 (Pages 96 to 99): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 2)

good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to either (1) pay the full amount of the above penal sum in complete discharge and exoneration of this bond and of all the liabilities of the Surety relating to this bond, or (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof. The Surety (Sureties) further agrees, at its option, either to tender the penal sum or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to commence and to complete all Work as provided herein.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any Work to be performed or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal.

Performance Bond #2 (Pages 96 to 99): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 3)

IN WITNESS WHEREOF, The Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this

\_\_\_\_\_ 10th \_\_\_\_\_ day of February \_\_\_\_\_ 20 15

(Seal) \_\_\_\_\_ JRCruz Corp. \_\_\_\_\_ (L.S.)  
Principal

(Seal) By: \_\_\_\_\_  
Evaristo Cruz, Jr., P.E., President  
Surety  
Liberty Mutual Insurance Company

(Seal) By: \_\_\_\_\_  
Lisa Nosal, Atty-in-Fact  
Surety

(Seal) By: \_\_\_\_\_  
Surety

(Seal) By: \_\_\_\_\_  
Surety

(Seal) By: \_\_\_\_\_  
Surety

By: \_\_\_\_\_

Bond Premium Rate \_\_\_\_\_

Bond Premium Cost \_\_\_\_\_

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

1875

1876

1877



Performance Bond #2 (Pages 96 to 99): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL IF A CORPORATION


State of New Jersey County of Monmouth ss:

On this 10th day of February, 2015 before me personally came \_\_\_\_\_

to me known, who, being by me duly sworn did depose and say that he resides at 4 Hickory Lane

Wincoff, NJ 07738; that he/she is the President of the corporation described in and which executed the foregoing instrument; that he/she signed his/her name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds.



ACKNOWLEDGMENT OF CORPORATIVE PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ before me personally came \_\_\_\_\_

to me known, who, being by me duly sworn did depose and say that he/she resides at \_\_\_\_\_

\_\_\_\_\_ ; that he/she is \_\_\_\_\_ partner of \_\_\_\_\_ a limited/general partnership existing under the laws of the State of \_\_\_\_\_, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ before me personally came \_\_\_\_\_

to me known, who, being by me duly sworn did depose and say that he/she resides at \_\_\_\_\_

\_\_\_\_\_ and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

\*\*\*\*\*

Affix Acknowledgments and Justification of Sureties.

CITY OF NEW YORK  
DDC

STANDARD CONSTRUCTION CONTRACT  
December 2013

ACKNOWLEDGEMENT OF SURETY

State of New Jersey ]  
  |-ss  
County of Passaic    ]

On 02/10/2015, before me personally came Lisa Nosal to me known, who, being by me duly sworn, did depose and say that she is an attorney-in-fact of Liberty Mutual Insurance Company the corporation described in and which executed the within instrument; that she knows the corporate seal of said corporation, and that the seal affixed to the within instrument is such corporate seal, and that she signed the said instrument and affixed the said seal as Attorney-in-Fact by authority of the Board of Directors of said corporation and by authority of this office under the Standing Resolutions thereof.

My Commission expires:

  
Notary Public

**STEPHANIE F. FOY**  
NOTARY PUBLIC  
STATE OF NEW JERSEY  
MY COMMISSION EXPIRES OCTOBER 27, 2018

**THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.**

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

American Fire and Casualty Company  
The Ohio Casualty Insurance Company

Liberty Mutual Insurance Company  
West American Insurance Company

Certificate No. 6743999

**POWER OF ATTORNEY**

KNOWN ALL PERSONS BY THESE PRESENTS: That American Fire & Casualty Company and The Ohio Casualty Insurance Company are corporations duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Joseph W. Mallory, Lisa Nosal, Louis A. Vlahakes, Pamela J. Boyle, Robert E. Culnen

all of the city of Trotton state of NJ each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 17th day of October, 2014.



American Fire and Casualty Company  
The Ohio Casualty Insurance Company  
Liberty Mutual Insurance Company  
West American Insurance Company

By: David M. Carey  
David M. Carey, Assistant Secretary

STATE OF PENNSYLVANIA ss  
COUNTY OF MONTGOMERY

On this 17th day of October, 2014, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of American Fire and Casualty Company, Liberty Mutual Insurance Company, The Ohio Casualty Insurance Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written.



TERESA PASTELLA  
COMMERCIAL STATE BANK  
Notary Public  
Plymouth Meeting, Montgomery County  
My Commission Expires March 28, 2017  
www.pennsylvania.gov

By: Teresa Pastella  
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of American Fire and Casualty Company, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

**ARTICLE IV - OFFICERS - Section 12. Power of Attorney.** Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary in and in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

**ARTICLE XIII - Execution of Contracts - SECTION 5. Surety Bonds and Undertakings.** Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

**Certificate of Designation -** The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

**Authorization -** By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, whenever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Gregory W. Davenport, the undersigned, Assistant Secretary, of American Fire and Casualty Company, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 10th day of February, 2015.



By: Gregory W. Davenport  
Gregory W. Davenport, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.



LIBERTY MUTUAL INSURANCE COMPANY  
 FINANCIAL STATEMENT — DECEMBER 31, 2013

Assets		Liabilities	
Cash and Bank Deposits.....	\$1,118,180,550	Unearned Premiums.....	\$5,940,431,054
*Bonds — U.S Government.....	1,888,225,943	Reserve for Claims and Claims Expense.....	17,305,063,560
*Other Bonds.....	12,039,490,815	Funds Held Under Reinsurance Treaties.....	212,659,311
*Stocks.....	9,030,962,112	Reserve for Dividends to Policyholders.....	1,226,236
Real Estate.....	251,301,907	Additional Statutory Reserve.....	63,348,980
Agents' Balances or Uncollected Premiums.....	4,781,042,931	Reserve for Commissions, Taxes and	
Accrued Interest and Rents.....	149,855,386	Other Liabilities.....	<u>5,826,683,629</u>
Other Admitted Assets.....	<u>15,216,749,451</u>	<b>Total.....</b>	<b>\$29,349,412,770</b>
<b>Total Admitted Assets.....</b>	<b><u>\$44,475,809,095</u></b>	Special Surplus Funds.....	\$55,686,852
		Capital Stock.....	11,250,000
		Paid in Surplus.....	7,898,288,167
		Unassigned Surplus.....	7,161,171,306
		<b>Surplus to Policyholders.....</b>	<b><u>15,126,396,325</u></b>
		<b>Total Liabilities and Surplus.....</b>	<b><u>\$44,475,809,095</u></b>



\* Bonds are stated at amortized or investment value; Stocks at Association Market Values.  
 The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2013, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 20th day of March, 2014.

*T. Mikolajewski*

Assistant Secretary

Payment Bond (Pages 100 to 103): Use for any contract for which a Payment Bond is required.

Bond No. 015047206

PAYMENT BOND (Page 1)

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, \_\_\_\_\_

JRCruz Corp.

675 Line Road, Aberdeen, NJ 07747

hereinafter referred to as the "Principal", and \_\_\_\_\_

Liberty Mutual Insurance Company

1200 MacArthur Blvd., Mahwah, NJ 07430

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of Eight Million Two Hundred Eighty One Thousand Nine Hundred Twenty Seven Dollars and No/100

(\$ 8,281,927.00) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for Historic Richmond Town Utilities Upgrade - Borough of Staten Island

DDC Pin: 8502014PV0026C / E-Pin: 85014B0165001

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so engaged who perform the work of laborers or mechanics at or in the vicinity of the site

Payment Bond (Pages 100 to 103): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 2)

of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

Payment Bond (Pages 100 to 103): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this 10th day of February, 2015.

(Seal)

JRCruz Corp. \_\_\_\_\_ (L.S.)  
Principal

By: \_\_\_\_\_  
Evaristo Cruz, Jr., P.E., President

(Seal)

Liberty Mutual Insurance Company

By: \_\_\_\_\_  
Lina Nassal, Atty-In-Fact

(Seal)

Surety

By: \_\_\_\_\_

(Seal)

Surety

By: \_\_\_\_\_

(Seal)

Surety

By: \_\_\_\_\_

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.


Payment Bond (Pages 100 to 103): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 4)

**ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION**

State of New Jersey County of Monmouth ss:

On this 10th day of February 2015, before me personally came Evaristo Cruz, Jr. to me known, who, being by me duly sworn did depose and say that he resides at 74 Hickory Ln. Lincroft, NJ 07738 that he is the President of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

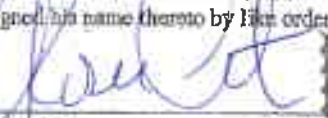  
Notary Public or Commissioner of Deeds

**ROSIE CATAO**  
ID # 2221271  
NOTARY PUBLIC  
STATE OF NEW JERSEY  
My Commission Expires Jan. 22, 2019

**ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP**

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known, and known to me to be one of the members of the firm of \_\_\_\_\_ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

**ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL**

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally appeared \_\_\_\_\_ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

\*\*\*\*\*

Affix Acknowledgments and Justification of Sureties.



ACKNOWLEDGEMENT OF SURETY

State of New Jersey ]  
  ]-ss  
County of Passaic    ]

On 02/10/2015, before me personally came Lisa Nosal to me known, who, being by me duly sworn, did depose and say that she is an attorney-in-fact of Liberty Mutual Insurance Company the corporation described in and which executed the within instrument; that she knows the corporate seal of said corporation, and that the seal affixed to the within instrument is such corporate seal, and that she signed the said instrument and affixed the said seal as Attorney-in-Fact by authority of the Board of Directors of said corporation and by authority of this office under the Standing Resolutions thereof.

My Commission expires:

  
Notary Public



**THIS POWER OF ATTORNEY IS NOT VALID UNLESS IT IS PRINTED ON RED BACKGROUND.**

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Certificate No. 6744000

American Fire and Casualty Company  
The Ohio Casualty Insurance Company

Liberty Mutual Insurance Company  
West American Insurance Company

**POWER OF ATTORNEY**

KNOWN ALL PERSONS BY THESE PRESENTS: That American Fire & Casualty Company and The Ohio Casualty Insurance Company are corporations duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Joseph W. Mallory; Lisa Nosal; Louis A. Vlahakes; Pamela J. Boyle; Robert E. Culnen

all of the city of Towson state of MD each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 17th day of October, 2014



American Fire and Casualty Company  
The Ohio Casualty Insurance Company  
Liberty Mutual Insurance Company  
West American Insurance Company

By: David M. Carey  
David M. Carey, Assistant Secretary

STATE OF PENNSYLVANIA ss  
COUNTY OF MONTGOMERY

On this 17th day of October, 2014, before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of American Fire and Casualty Company, Liberty Mutual Insurance Company, The Ohio Casualty Insurance Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written.



TERESA PASTELLA  
Notary Public  
West Plymouth, Township, Montgomery County, PA  
My Commission Expires March 28, 2017

By: Teresa Pastella  
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of American Fire and Casualty Company, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

**ARTICLE IV - OFFICERS** - Section 12. Power of Attorney. Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitations as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

**ARTICLE XIII - Execution of Contracts - SECTION 5. Surety Bonds and Undertakings.** Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

**Certificate of Designation** - The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

**Authorization** - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, whenever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Gregory W. Davenport, the undersigned Assistant Secretary, of American Fire and Casualty Company, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 10th day of February, 2015



By: Gregory W. Davenport  
Gregory W. Davenport, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day



LIBERTY MUTUAL INSURANCE COMPANY  
 FINANCIAL STATEMENT — DECEMBER 31, 2013

Assets	Liabilities
Cash and Bank Deposits..... \$1,118,180,550	Unearned Premiums..... \$5,940,431,054
*Bonds — U.S Government..... 1,888,225,943	Reserve for Claims and Claims Expense..... 17,305,063,560
*Other Bonds..... 12,039,490,815	Funds Held Under Reinsurance Treaties..... 212,659,311
*Stocks..... 9,030,962,112	Reserve for Dividends to Policyholders..... 1,226,236
Real Estate..... 251,301,907	Additional Statutory Reserve..... 63,348,980
Agents' Balances or Uncollected Premiums..... 4,781,042,931	Reserve for Commissions, Taxes and
Accrued Interest and Rents..... 149,855,386	Other Liabilities..... <u>5,826,683,629</u>
Other Admitted Assets..... <u>15,216,749,451</u>	<b>Total</b> ..... <b>\$29,349,412,770</b>
<b>Total Admitted Assets</b> ..... <b><u>\$44,475,809,095</u></b>	Special Surplus Funds..... \$55,686,852
	Capital Stock..... 11,250,000
	Paid in Surplus..... 7,898,288,167
	Unassigned Surplus..... 7,161,171,306
	<b>Surplus to Policyholders</b> ..... <b><u>15,126,396,325</u></b>
	<b>Total Liabilities and Surplus</b> ..... <b><u>\$44,475,809,095</u></b>



\* Bonds are stated at amortized or investment value; Stocks at Association Market Values.  
 The foregoing financial information is taken from Liberty Mutual Insurance Company's financial statement filed with the state of Massachusetts Department of Insurance.

I, TIM MIKOLAJEWSKI, Assistant Secretary of Liberty Mutual Insurance Company, do hereby certify that the foregoing is a true, and correct statement of the Assets and Liabilities of said Corporation, as of December 31, 2013, to the best of my knowledge and belief.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed the seal of said Corporation at Seattle, Washington, this 20th day of March, 2014.

*TAMikolajewski*

Assistant Secretary

**Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.**

PERFORMANCE BOND #1 (Page 2)

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to (1) pay the City the cost to complete the contract as determined by the City in excess of the balance of the Contract held by the City, plus any damages or costs to which the City is entitled, up to the full amount of the above penal sum, (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof, or (3) tender a completion Contractor that is acceptable to the City. The Surety (Sureties) further agrees, at its option, either to notify the City that it elects to pay the city the cost of completion plus any applicable damages and costs under option (1) above, or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and, if the Surety elects to fully perform and complete the Work, then to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. If the Surety elects to tender payment pursuant to (1) above, then the Surety shall tender such amount within fifteen (15) business days notification from the City of the cost of completion. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and complete all Work as provided herein, or to tender a completion contractor.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, and waivers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to subcontractors shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal. Notwithstanding the above, if the City makes payments to the Principal before the time required by the contract that in the aggregate exceed \$100,000 or 10% of the Contract price, whichever is less, and that have not become earned prior to the Principal being found to be in default, then all payments made to the Principal before the time required by the Contract shall be added to the remaining contract value available to be paid for the completion of the Contract as if such sums had not been paid to the Principal, but shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and to complete all Work as provided herein, or to tender a completion contractor.

**Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.**

PERFORMANCE BOND #1 (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

(Seal) \_\_\_\_\_ (L.S.)  
Principal

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

Bond Premium Rate \_\_\_\_\_

Bond Premium Cost \_\_\_\_\_

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

**Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.**

PERFORMANCE BOND #1 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_, before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn did depose and say that he resides at \_\_\_\_\_ that he is the \_\_\_\_\_ of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ before me personally appeared \_\_\_\_\_ to me known, and known to me to be one of the members of the firm of \_\_\_\_\_ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ before me personally appeared \_\_\_\_\_ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

\* \* \* \* \*

Affix Acknowledgments and Justification of Sureties

**Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.**

PERFORMANCE BOND #2 (Page 1)

PERFORMANCE BOND #2

KNOW ALL PERSONS BY THESE PRESENTS, That we, \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Principal", and \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

(\$ \_\_\_\_\_) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

**Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.**

PERFORMANCE BOND #2 (Page2)

**NOW, THEREFORE**, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to either (1) pay the full amount of the above penal sum in complete discharge and exoneration of this bond and of all the liabilities of the Surety relating to this bond, or (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof. The Surety (Sureties) further agrees, at its option, either to tender the penal sum or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to commence and to complete all Work as provided herein.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any Work to be performed or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal.



**Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.**

PERFORMANCE BOND #2 (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

(Seal) \_\_\_\_\_(L.S.)  
Principal

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

Bond Premium Rate \_\_\_\_\_

Bond Premium Cost \_\_\_\_\_

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

**Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.**

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn did depose and say that he/she resides at \_\_\_\_\_; that he/she is the \_\_\_\_\_ of \_\_\_\_\_ the corporation described in and which executed the foregoing instrument; and that he signed his name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn did depose and say that he/she resides at \_\_\_\_\_; that he/she is \_\_\_\_\_ partner of \_\_\_\_\_, a limited/general partnership existing under the laws of the State of \_\_\_\_\_, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn did depose and say that he/she resides at \_\_\_\_\_, and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

\* \* \* \* \*

Affix Acknowledgments and Justification of Sureties.

**Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.**

PAYMENT BOND (Page 1)

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Principal", and \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

(\$ \_\_\_\_\_) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so

**Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.**

PAYMENT BOND (Page 2)

engaged who perform the work of laborers or mechanics at or in the vicinity of the site of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

**Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.**

PAYMENT BOND (Page 3)

IN WITNESS HEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

(Seal) \_\_\_\_\_ (L.S.)  
Principal

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

(Seal) \_\_\_\_\_  
Surety

By: \_\_\_\_\_

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

**Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.**

PAYMENT BOND (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ before me personally came \_\_\_\_\_ to me known, who, being by me duly sworn did depose and say that he resides at \_\_\_\_\_ that he is the \_\_\_\_\_ of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ before me personally appeared \_\_\_\_\_ to me known, and known to me to be one of the members of the firm of \_\_\_\_\_ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of \_\_\_\_\_ County of \_\_\_\_\_ ss:

On this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_ before me personally appeared \_\_\_\_\_ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

\_\_\_\_\_  
Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

\* \* \* \* \*

Affix Acknowledgments and Justification of Sureties

**THIS PAGE LEFT BLANK**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

LABOR LAW §220 PREVAILING WAGE SCHEDULE

Workers, Laborers and Mechanics employed on a public work project must receive not less than the prevailing rate of wage and benefits for the classification of work performed by each upon such public work. Pursuant to Labor Law §220 the Comptroller of the City of New York has promulgated this schedule solely for Workers, Laborers and Mechanics engaged by private contractors on New York City public work contracts.

This schedule is a compilation of separate determinations of the prevailing rate of wage and supplements made by the Comptroller for each trade classification listed herein pursuant to New York State Labor Law section 220 (5). The source of the wage and supplement rates, whether a collective bargaining agreement, survey data or other, is listed at the end of each classification.

Agency Chief Contracting Officers should contact the Bureau of Labor Law's Classification Unit with any questions concerning trade classifications, prevailing rates or prevailing practices with respect to procurement on New York City public works contracts. Contractors are advised to review the Comptroller's Prevailing Wage Schedule before bidding on public works contracts. Contractors with questions concerning trade classifications, prevailing rates or prevailing practices with respect to public works contracts in the procurement stage must contact the contracting agency responsible for the procurement.

Any error as to compensation under the prevailing wage law or other information as to trade classification, made by the contracting agency in the contract documents or in any other communication, will not preclude a finding against the contractor of prevailing wage violation.

Any questions concerning trade classifications, prevailing rates or prevailing practices on New York City public works contracts that have already been awarded may be directed to the Bureau of Labor Law's Classification Unit by calling (212) 669-7974. All callers must have the agency name and contract registration number available when calling with questions on public works contracts. Please direct all other compliance issues to: Bureau of Labor Law, Attn: Wasyl Kinach, P.E., Office of the Comptroller, 1 Centre Street, Room 1122, New York, N.Y. 10007; Fax (212) 669-4002.

The appropriate schedule of prevailing wages and benefits must be posted at all public work sites pursuant to Labor Law §220 (3-a) (a).

This schedule is applicable to work performed during the effective period, unless otherwise noted. Changes to this schedule are published on our web site [www.comptroller.nyc.gov](http://www.comptroller.nyc.gov). Contractors must pay the wages and supplements in effect when the worker, laborer, mechanic performs the work. Preliminary schedules for future one-year periods appear in the City Record on or about June 1 each succeeding year. Final schedules appear on or about July 1 in the City Record and on our web site [www.comptroller.nyc.gov](http://www.comptroller.nyc.gov).

The Comptroller's Office has attempted to include all overtime, shift and night differential, Holiday, Saturday, Sunday or other premium time work. However, this schedule does not set forth every prevailing practice with respect to such rates with which employers must comply. All such practices are nevertheless part of the employer's prevailing wage obligation and contained in the collective bargaining agreements of the prevailing wage unions. These collective bargaining agreements are available for inspection by appointment. Requests for appointments may be made by calling (212) 669-4443, Monday through Friday between the hours of 9 a.m. and 5 p.m.



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Prevailing rates and ratios for apprentices are attached to this schedule in the Appendix. Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant, registered with the New York State Department of Labor, may be employed on a public work project. Workers who are not journey persons or not registered apprentices pursuant to Labor Law §220 (3-e) may not be substituted for apprentices and must be paid as journey persons.

Public Work construction, reconstruction, demolition, excavation, rehabilitation, repair, renovation, alteration, or improvement contracts awarded pursuant to a Project Labor Agreement ("PLA") in accordance with Labor Law section 222 may have different labor standards for shift, premium and overtime work. Please refer to the PLA's pre-negotiated labor agreements for wage and benefit rates applicable to work performed outside of the regular workday. More information is available at the Mayor's Office of Contract Services (MOCS) web page at <http://www.nyc.gov/html/mocs/html/vendors/pla.shtml>.

All the provisions of Labor Law section 220 remain applicable to PLA work including, but not limited to, the enforcement of prevailing wage requirements by the Comptroller; however, we will enforce shift, premium, overtime and other non-standard rates as they appear in a project's pre-negotiated labor agreement.

In order to meet their obligation to provide prevailing supplemental benefits to each covered employee, employers must either:

- 1) Provide bona-fide benefits which cost the employer no less than the prevailing supplemental benefits rate; or
- 2) Supplement the employee's hourly wage by an amount no less than the prevailing supplemental benefits rate; or
- 3) Provide a combination of bona-fide benefits and wage supplements which cost the employer no less than the prevailing supplemental benefits rate in total.

Particular attention should be given to the supplemental benefits requirement. Although in most instances the payment or provision for supplemental benefits is for each hour worked, some classifications require the payment or provision of supplemental benefits for each hour paid. Consequently, some prevailing practices require benefits to be purchased at the overtime, shift differential, Holiday, Saturday, Sunday or other premium time rate.

**Benefits are paid for EACH HOUR WORKED unless otherwise noted.**

Wasył Kinach, P.E.  
Director of Classifications  
Bureau of Labor Law

## TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER .....	5
BLASTER .....	5
BOILERMAKER.....	7
BRICKLAYER.....	8
CARPENTER - BUILDING COMMERCIAL .....	9
CARPENTER - HEAVY CONSTRUCTION WORK .....	10
CEMENT & CONCRETE WORKER.....	11
CEMENT MASON.....	11
CORE DRILLER .....	12
DERRICKPERSON AND RIGGER .....	14
DIVER.....	14
DOCKBUILDER - PILE DRIVER.....	15
DRIVER: TRUCK (TEAMSTER) .....	16
ELECTRICIAN .....	18
ELECTRICIAN - ALARM TECHNICIAN.....	22
ELECTRICIAN-STREET LIGHTING WORKER .....	23
ELEVATOR CONSTRUCTOR .....	24
ELEVATOR REPAIR & MAINTENANCE.....	25
ENGINEER .....	26
ENGINEER - CITY SURVEYOR AND CONSULTANT.....	31
ENGINEER - FIELD (BUILDING CONSTRUCTION) .....	32
ENGINEER - FIELD (HEAVY CONSTRUCTION) .....	33
ENGINEER - FIELD (STEEL ERECTION) .....	34
ENGINEER - OPERATING .....	35
FLOOR COVERER .....	42
GLAZIER .....	43
GLAZIER - REPAIR & MAINTENANCE .....	44
HEAT AND FROST INSULATOR .....	45
HOUSE WRECKER .....	46
IRON WORKER - ORNAMENTAL.....	47
IRON WORKER - STRUCTURAL.....	48
LABORER .....	48
LANDSCAPING .....	49
MARBLE MECHANIC.....	51
MASON TENDER .....	52

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

MASON TENDER (INTERIOR DEMOLITION WORKER).....	53
METALLIC LATHER.....	54
MILLWRIGHT .....	55
MOSAIC MECHANIC.....	56
PAINTER .....	57
PAINTER - SIGN.....	57
PAINTER - STRIPER.....	58
PAINTER - STRUCTURAL STEEL.....	59
PAPERHANGER .....	60
PAVER AND ROADBUILDER.....	61
PLASTERER .....	63
PLASTERER - TENDER.....	63
PLUMBER .....	64
PLUMBER (MECHANICAL EQUIPMENT AND SERVICE).....	65
PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION).....	66
PLUMBER: PUMP & TANK.....	67
POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING RENOVATION).....	67
ROOFER.....	68
SANDBLASTER - STEAMBLASTER.....	69
SHEET METAL WORKER.....	70
SHEET METAL WORKER - SPECIALTY .....	71
SHIPYARD WORKER.....	72
SIGN ERECTOR.....	73
STEAMFITTER .....	74
STEAMFITTER - REFRIGERATION AND AIR CONDITIONER .....	75
STONE MASON - SETTER.....	77
TAPER.....	78
TELECOMMUNICATION WORKER.....	79
TILE FINISHER.....	80
TILE LAYER - SETTER .....	80
TIMBERPERSON .....	81
TUNNEL WORKER .....	82
WELDER.....	84

**ASBESTOS HANDLER**

(Hazardous Material; Disturbs, removes, encapsulates, repairs, or encloses friable asbestos material)

**Asbestos Handler**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$36.00**

Supplemental Benefit Rate per Hour: **\$15.45**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Time and one half the regular hourly rate after 40 hours in any work week.

**Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Easter

**Paid Holidays**

None

(Local #78 and Local #12A)

---

---

**BLASTER**

**Blaster**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$45.70**

Supplemental Benefit Rate per Hour: **\$39.69**

**Blaster (Hydraulic)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$46.49**

Supplemental Benefit Rate per Hour: **\$39.69**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Blaster - Trac Drill Hydraulic**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$41.20  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Wagon: Air Trac: Quarry Bar: Drillrunners**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$40.44  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Operators of Jack Hammers**

Chippers: Spaders: Concrete Breakers: and all other pneumatic tools of like usage: Walk Behind Self Propelled Hydraulic Asphalt and Concrete Breakers: Hydro (Water) Demolition

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$39.43  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Powder Carriers**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$35.66  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Hydraulic Trac Drill Chuck Tender**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$34.42  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Chuck Tender & Nipper**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$33.69  
Supplemental Benefit Rate per Hour: \$39.69

**Blaster - Magazine Keepers: (Watch Person)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$20.30  
Supplemental Benefit Rate per Hour: \$39.69

**Overtime Description**

Magazine Keepers:

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Time and one half for work performed in excess of forty (40) hours per week and for work performed on Saturdays, Sundays and Holidays.

**All Other Employees:**

Time and one-half for the first eight hours of work on Saturday and for Make-up Time. Double time for all hours over eight Monday through Friday (except make-up hours) and for all hours worked on Sunday and Holidays.

**Overtime**

Double time the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

None

**Shift Rates**

A single shift shall be 8 hours plus an unpaid lunch, starting at 8:00 A.M (or between 6:00 A.M. and 10:00 A.M. on weekdays). When two (2) shifts are employed, each shift shall be 8 hours plus ½ hour unpaid lunch. When three (3) shifts are employed, each shift will work seven and one-half (7 ½) hours, but will be paid for eight (8) hours, since only one-half (½) hour is allowed for mealtime. When two (2) or more shifts are employed, single time will be paid for each shift. The first 8 hours of any and all work performed Monday through Friday inclusive of any off-shift shall be at the single time rate.

(Local #29)

---

---

**BOILERMAKER**

**Boilermaker**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$50.45**

Supplemental Benefit Rate per Hour: **\$41.31**

Supplemental Note: For time and one half overtime - \$61.37; For double overtime - \$81.43.

**Overtime Description**

For Repair and Maintenance work:

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for Sunday.  
For New Construction work:  
Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Columbus Day  
Election Day  
Veteran's Day  
Thanksgiving Day  
Christmas Day

Quadruple time the regular rate for work on the following holiday(s).

Labor Day

### Paid Holidays

Good Friday  
Day after Thanksgiving  
Day before Christmas  
Day before New Year's Day

### Shift Rates

When shifts are required, the first shift shall work eight (8) hours at the regular straight-time hourly rate. The second shift shall work seven and one-half (7 ½) hours and receive eight hours at the regular straight time hourly rate plus twenty-five cents (\$0.25) per hour. The third shift shall work seven (7) hours and receive eight hours at the regular straight time hourly rate plus fifty cents (\$0.50) per hour. A thirty (30) minute lunch period shall not be considered as time worked. Work in excess of the above shall be paid overtime at the appropriate new construction work or repair work overtime wage and supplemental benefit hourly rate.

(Local #5)

---

---

## BRICKLAYER

### Bricklayer

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$47.78

Supplemental Benefit Rate per Hour: \$28.03

### Overtime

Time and one half the regular rate after a 7 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

### Paid Holidays

None

### Shift Rates

Overtime rates to be paid outside the regular scheduled work day.

(Bricklayer District Council)

---

---

## CARPENTER - BUILDING COMMERCIAL

### Building Commercial

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$49.88

Supplemental Benefit Rate per Hour: \$44.10

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Washington's Birthday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Presidential Election Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Paid Holidays**

None

**Shift Rates**

The second shift will receive one hour at the double time rate of pay for the last hour of the shift; eight hours pay for seven hours of work, nine hours pay for eight hours of work. There must be a first shift in order to work a second shift.

(Carpenters District Council)

---

---

**CARPENTER - HEAVY CONSTRUCTION WORK  
(Construction of Engineering Structures and Building Foundations)**

**Heavy Construction Work**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$48.35**

Supplemental Benefit Rate per Hour: **\$46.12**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

None

**Shift Rates**

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

(Carpenters District Council)

---

---

## CEMENT & CONCRETE WORKER

### Cement & Concrete Worker

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$42.38

Supplemental Benefit Rate per Hour: \$26.17

Supplemental Note: \$28.92 on Saturdays; \$31.67 on Sundays & Holidays

### Overtime Description

Time and one half the regular rate after 7 hour day (time and one half the regular rate after an 8 hour day when working with Dockbuilders on pile cap forms and for work below street level to the top of the foundation wall, not to exceed 2 feet or 3 feet above the sidewalk-brick shelf, when working on the foundation and structure.)

### Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

### Paid Holidays

1/2 day before Christmas Day

1/2 day before New Year's Day

### Shift Rates

On shift work extending over a twenty-four hour period, all shifts are paid at straight time.

(Cement Concrete Workers District Council)

---

---

## CEMENT MASON

### Cement Mason

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$38.88**

Supplemental Benefit Rate per Hour: **\$39.80**

Supplemental Note: For time and one half overtime - \$49.05; For double overtime - \$58.30

### **Overtime Description**

Time and one-half the regular rate after an 8 hour day, double time the regular rate after 10 hours. Time and one-half the regular rate on Saturday, double time the regular rate after 10 hours. Double time the regular rate on Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

### **Paid Holidays**

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

### **Shift Rates**

For an off shift day, (work at times other than the regular 7:00 A.M. to 3:30 P.M. work day) a cement mason shall be paid at the regular hourly rate plus a 25% per hour differential. Four Days a week at Ten (10)hour day.

(Local #780)

---

---

## **CORE DRILLER**

### **Core Driller**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$35.71**

Supplemental Benefit Rate per Hour: **\$21.69**

### **Core Driller Helper**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$28.60**

Supplemental Benefit Rate per Hour: **\$21.69**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Core Driller Helper(Third year in the industry)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$25.74**

Supplemental Benefit Rate per Hour: **\$21.69**

**Core Driller Helper (Second year in the industry)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$22.88**

Supplemental Benefit Rate per Hour: **\$21.69**

**Core Driller Helper (First year in the industry)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$20.02**

Supplemental Benefit Rate per Hour: **\$21.69**

**Overtime Description**

Time and one half the regular rate for work on a holiday plus Holiday pay when worked.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

**Shift Rates**

The shift day shall be the continuous eight and one-half (8½) hours from 6:00 A.M. to 2:30 P.M. and from 2:30 P.M. to 11:00 P.M., including one-half (½) hour of employees regular rate of pay for lunch. When two (2) or more shifts are employed, single time shall be paid for each shift, but those employees employed on a shift other than from 8:00 A.M. to 5:00 P.M. shall, in addition, receive seventy-five cents (\$0.75) per hour differential for each hour worked. When three (3) shifts are needed, each shift shall work seven and one-half (7 ½) hours paid for eight (8) hours of labor and be permitted one-half (½) hour for mealtime.

(Carpenters District Council)

---

---

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**DERRICKPERSON AND RIGGER**

**Derrick Person & Rigger**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$42.25

Supplemental Benefit Rate per Hour: \$47.81

Supplemental Note: The above supplemental rate applies for work performed in Manhattan, Bronx, Brooklyn and Queens. \$49.23 - For work performed in Staten Island.

**Overtime Description**

The first two hours of overtime on weekdays and the first seven hours of work on Saturdays are paid at time and one half for wages and supplemental benefits. All additional overtimes is paid at double time for wages and supplemental benefits. Deduct \$1.42 from the Staten Island hourly benefits rate before computing overtime.

**Overtime**

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

1/2 day on Christmas Eve if work is performed in the A.M.

(Local #197)

---

---

**DIVER**

**Diver (Marine)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$61.30

Supplemental Benefit Rate per Hour: \$46.12

**Diver Tender (Marine)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$43.45

Supplemental Benefit Rate per Hour: \$46.12

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

None

**Shift Rates**

When three shifts are utilized each shift shall work seven and one half-hours (7 1/2 hours) and paid for 8 hours, allowing for one half hour for lunch.

(Carpenters District Council)

---

---

**DOCKBUILDER - PILE DRIVER**

**Dockbuilder - Pile Driver**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$48.35

Supplemental Benefit Rate per Hour: \$46.12

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Carpenters District Council)

---

---

**DRIVER: TRUCK (TEAMSTER)**

**Driver - Dump Truck**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$38.86**

Supplemental Benefit Rate per Hour: **\$40.44**

Supplemental Note: Over 40 hours worked: time and one half rate \$16.94, double time rate \$22.59

**Driver - Tractor Trailer**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$38.88**

Supplemental Benefit Rate per Hour: **\$41.70**

Supplemental Note: For over 40 hours worked: at time and one half - \$15.90; at double time - \$21.21

**Driver - Euclid & Turnapull Operator**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.44**

Supplemental Benefit Rate per Hour: **\$41.70**

Supplemental Note: Over 40 hours worked: time and one half rate \$15.90, double time rate \$21.21

**Overtime Description**

For Paid Holidays: Holiday pay for all holidays shall be prorated based two hours per day for each day worked in the holiday week, not to exceed 8 hours of holiday pay. For Thanksgiving week, the prorated share shall be 5 1/3 hours of holiday pay for each day worked in Thanksgiving week.

**Overtime**

Time and one half the regular rate after an 8 hour day.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

### Paid Holidays

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

---

### Driver Redi-Mix (Sand & Gravel)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$36.05**

Supplemental Benefit Rate per Hour: **\$38.60**

Supplemental Note: Over 40 hours worked: time and one half rate \$13.53, double time rate \$18.04

### Overtime Description

For Paid Holidays: Employees working two (2) days in the calendar week in which the holiday falls are to paid for these holidays, provided they shape each remaining workday during that calendar week.

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

President's Day  
Columbus Day  
Veteran's Day



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Triple time the regular rate for work on the following holiday(s).

New Year's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Election Day  
Thanksgiving Day  
Christmas Day

(Local #282)

---

---

**ELECTRICIAN**

(Including all low voltage cabling carrying data; video; and voice in combination with data and or video.)

**Electrician "A" (Regular Day)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: **\$53.00**

Supplemental Benefit Rate per Hour: **\$47.54**

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: **\$54.00**

Supplemental Benefit Rate per Hour: **\$50.03**

**Electrician "A" (Regular Day Overtime)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: **\$79.50**

Supplemental Benefit Rate per Hour: **\$50.86**

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: **\$81.00**

Supplemental Benefit Rate per Hour: **\$53.41**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Electrician "A" (Day Shift)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$53.00

Supplemental Benefit Rate per Hour: \$47.54

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$54.00

Supplemental Benefit Rate per Hour: \$50.03

**Electrician "A" (Day Shift Overtime After 8 hours)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$79.50

Supplemental Benefit Rate per Hour: \$50.86

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$81.00

Supplemental Benefit Rate per Hour: \$53.41

**Electrician "A" (Swing Shift)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$62.19

Supplemental Benefit Rate per Hour: \$54.07

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$63.36

Supplemental Benefit Rate per Hour: \$56.94

**Electrician "A" (Swing Shift Overtime After 7.5 hours)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$93.29

Supplemental Benefit Rate per Hour: \$57.97

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$95.04

Supplemental Benefit Rate per Hour: \$60.91

**Electrician "A" (Graveyard Shift)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$69.66

Supplemental Benefit Rate per Hour: \$59.59

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$70.97

Supplemental Benefit Rate per Hour: \$62.78

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Electrician "A" (Graveyard Shift Overtime After 7 hours)**

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: **\$104.49**

Supplemental Benefit Rate per Hour: **\$63.96**

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: **\$106.46**

Supplemental Benefit Rate per Hour: **\$67.23**

**Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

**Overtime Holidays**

Time and one half the regular rate for work on a holiday.

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

**Paid Holidays**

None

**Shift Rates**

When so elected by the Employer, one or more shifts of at least five days duration may be scheduled as follows:  
Day Shift: 8:00 am to 4:30 pm, Swing Shift 4:30 pm to 12:30 am, Graveyard Shift: 12:30 am to 8:00 am.

For multiple shifts of temporary light and/or power, the temporary light and/or power employee shall be paid for 8 hours at the straight time rate. For three or less workers performing 8 hours temporary light and/or power the supplemental benefit rate is \$23.63. Effective 5/13/2015 - \$24.39.

---

**Electrician "M" (First 8 hours)**

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$27.00

Supplemental Benefit Rate per Hour: \$20.32

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$26.30

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$19.96

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$22.50

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$18.06

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$27.50

Supplemental Benefit Rate per Hour: \$20.82

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$26.80

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$20.46

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$23.00

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$18.56

### Electrician "M" (Overtime After First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2014 - 5/12/2015

Wage Rate per Hour: \$40.50

Supplemental Benefit Rate per Hour: \$22.01

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$39.45

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$21.61

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$33.75

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$19.47

Effective Period: 5/13/2015 - 6/30/2015

Wage Rate per Hour: \$41.25

Supplemental Benefit Rate per Hour: \$22.54

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$40.20

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$22.14

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$34.50

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$20.00

### **Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

### **Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

**Paid Holidays**

None

(Local #3)

---

---

**ELECTRICIAN - ALARM TECHNICIAN**

(Scope of Work - Inspect, test, repair, and replace defective, malfunctioning, or broken devices, components and controls of Fire, Burglar and Security Systems)

**Alarm Technician**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$30.40**

Supplemental Benefit Rate per Hour: **\$13.90**

Supplemental Note: \$12.40 only after 8 hours worked in a day

**Overtime Description**

Time and one half the regular rate for work on the following holidays: Columbus Day, Veterans Day, Day after Thanksgiving.

Double time the regular rate for work on the following holidays: New Year's day, Martin Luther King Jr. Day, President's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Paid Holidays**

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 PREVAILING WAGE SCHEDULE

**Shift Rates**

Night Differential is based upon a ten percent (10%) differential between the hours of 4:00 P.M. and 12:30 A.M. and a fifteen percent (15%) differential for the hours 12:00 A.M. to 8:00 A.M.

**Vacation**

At least 1 year of employment.....ten (10) days  
5 years or more of employment.....fifteen (15) days  
10 years of employment.....twenty (20) days  
Plus one Personal Day per year

**Sick Days:**

One day per Year

(Local #3)

---

---

**ELECTRICIAN-STREET LIGHTING WORKER**

**Electrician - Electro Pole Electrician**

Effective Period: 7/1/2014 - 5/19/2015  
Wage Rate per Hour: **\$53.00**  
Supplemental Benefit Rate per Hour: **\$49.34**

Effective Period: 5/20/2015 - 6/30/2015  
Wage Rate per Hour: **\$54.00**  
Supplemental Benefit Rate per Hour: **\$51.86**

**Electrician - Electro Pole Foundation Installer**

Effective Period: 7/1/2014 - 5/19/2015  
Wage Rate per Hour: **\$40.18**  
Supplemental Benefit Rate per Hour: **\$37.73**

Effective Period: 5/20/2015 - 6/30/2015  
Wage Rate per Hour: **\$40.93**  
Supplemental Benefit Rate per Hour: **\$39.46**

**Electrician - Electro Pole Maintainer**

Effective Period: 7/1/2014 - 5/19/2015  
Wage Rate per Hour: **\$34.40**  
Supplemental Benefit Rate per Hour: **\$34.00**

Effective Period: 5/20/2015 - 6/30/2015  
Wage Rate per Hour: **\$35.05**  
Supplemental Benefit Rate per Hour: **\$35.51**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

### Overtime Description

Electrician - Electro Pole Electrician: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week.

Electrician - Electro Pole Foundation Installer: Time and one half the regular rate after 8 hours within a 24 hour period and Saturday and Sunday.

Electrician - Electro Pole Maintainer: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week. Saturdays and Sundays may be used as a make-up day at straight time when a day is lost during the week to inclement weather.

### Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### Paid Holidays

None

(Local #3)

---

## ELEVATOR CONSTRUCTOR

### Elevator Constructor

Effective Period: 7/1/2014 - 3/16/2015

Wage Rate per Hour: \$58.23

Supplemental Benefit Rate per Hour: \$29.47

Effective Period: 3/17/2015 - 6/30/2015

Wage Rate per Hour: \$59.55

Supplemental Benefit Rate per Hour: \$31.07

### Overtime Description

For New Construction: work performed after 7 or 8 hour day, Saturday, Sunday or between 4:30pm and 7:00am shall be paid at double time rate.

Existing buildings: work performed after an 8 hour day, Saturday, Sunday or between 5:30pm and 7:00 am shall be paid time and one half.

### Overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for work on the following holiday(s).

**Paid Holidays**

- New Year's Day
- President's Day
- Good Friday
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Veteran's Day
- Thanksgiving Day
- Day after Thanksgiving
- Christmas Day

**Vacation**

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

---

---

**ELEVATOR REPAIR & MAINTENANCE**

**Elevator Service/Modernization Mechanic**

Effective Period: 7/1/2014 - 3/16/2015

Wage Rate per Hour: \$46.00

Supplemental Benefit Rate per Hour: \$28.78

Effective Period: 3/17/2015 - 6/30/2015

Wage Rate per Hour: \$46.92

Supplemental Benefit Rate per Hour: \$30.91

**Overtime Description**

For Service Work: Double time - all work performed on Sundays, Holidays, and between midnight and 7:00am.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on a holiday plus the day's pay.

**Paid Holidays**

- New Year's Day
- President's Day
- Good Friday
- Memorial Day
- Independence Day



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

### Shift Rates

For Modernization Work (4pm to 12:30am) - regularly hourly rate plus a (15%) fifteen percent differential.

### Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

---

---

## ENGINEER

### Engineer - Heavy Construction Operating Engineer I

Cherry pickers 20 tons and over and Loaders (rubber tired and/or tractor type with a manufacturer's minimum rated capacity of six cubic yards and over).

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$61.05

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$97.68

### Engineer - Heavy Construction Operating Engineer II

Backhoes, Basin Machines, Groover, Mechanical Sweepers, Bobcat, Boom Truck, Barrier Transport (Barrier Mover) & machines of similar nature. Operation of Churn Drills and machines of a similar nature, Stetco Silent Hoist and machines of similar nature, Vac-Alls, Meyers Machines, John Beam and machines of a similar nature, Ross Carriers and Travel Lifts and machines of a similar nature, Bulldozers, Scrapers and Turn-a-Pulls: Tugger Hoists (Used exclusively for handling excavated material); Tractors with attachments, Hyster and Roustabout Cranes, Cherry pickers. Austin Western, Grove and machines of a similar nature, Scoopmobiles, Monorails, Conveyors, Trenchers: Loaders-Rubber Tired and Tractor: Barber Greene and Eimco Loaders and Eimco Backhoes; Mighty Midget and similar breakers and Tampers, Curb and Gutter Pavers and Motor Patrol, Motor Graders and all machines of a similar nature. Locomotives 10 Tons or under. Mini-Max, Break-Tech and machines of a similar nature; Milling machines, robotic and demolition machines and machines of a similar nature, shot blaster, skid steer machines and machines of a similar nature including bobcat, pile rig rubber-tired excavator (37,000 lbs. and under), 2 man auger.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$59.24

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$94.78

### **Engineer - Heavy Construction Operating Engineer III**

Minor Equipment such as Tractors, Post Hole Diggers, Ditch Witch (Walk Behind), Road Finishing Machines, Rollers five tons and under, Tugger Hoists, Dual Purpose Trucks, Fork Lifts, and Dempsey Dumpers, Fireperson.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$56.22**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

Shift Wage Rate: **\$89.95**

### **Engineer - Heavy Construction Maintenance Engineer I**

Installing, Repairing, Maintaining, Dismantling and Manning of all equipment including Steel Cutting, Bending and Heat Sealing Machines, Mechanical Heaters, Grout Pumps, Bentonite Pumps & Plants, Screening Machines, Fusion Coupling Machines, Tunnel Boring Machines Moles and Machines of a similar nature, Power Packs, Mechanical Hydraulic Jacks; all drill rigs including but not limited to Churn, Rotary Caisson, Raised Bore & Drills of a similar nature; Personnel, Inspection & Safety Boats or any boats used to perform functions of same, Mine Hoists, Whirlies, all Climbing Cranes, all Tower Cranes, including but not limited to Truck Mounted and Crawler Type and machines of similar nature; Maintaining Hydraulic Drills and machines of a similar nature; Well Point System-Installation and dismantling; Burning, Welding, all Pumps regardless of size and/or motor power, except River Cofferdam Pumps and Wells Point Pumps; Motorized Buggies (three or more); equipment used in the cleaning and televising of sewers, but not limited to jet-rodder/vacuum truck, vacall/vactor, closed circuit television inspection equipment; high powered water pumps, jet pumps; screed machines and concrete finishing machines of a similar nature; vermeers.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$58.97**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

Shift Wage Rate: **\$94.35**

### **Engineer - Heavy Construction Maintenance Engineer II**

On Base Mounted Tower Cranes

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$77.30**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

Shift Wage Rate: **\$123.68**

### **Engineer - Heavy Construction Maintenance Engineer III**

On Generators, Light Towers

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.10**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Shift Wage Rate: \$62.56

**Engineer - Heavy Construction Maintenance Engineer IV**

On Pumps and Mixers including mud sucking

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$40.11

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$64.18

**Engineer - Heavy Construction Oilers I**

Gradalls, Cold Planer Grader, Concrete Pumps, Driving Truck Cranes, Driving and Operating Fuel and Grease Trucks.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$53.22

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$85.15

**Engineer - Heavy Construction Oilers II**

All gasoline, electric, diesel or air operated Shovels, Draglines, Backhoes, Keystones, Pavers, Gunite Machines, Battery of Compressors, Crawler Cranes, two-person Trenching Machines.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$36.97

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$59.15

**Engineer - Steel Erection Maintenance Engineers**

Derrick, Travelers, Tower, Crawler Tower and Climbing Cranes

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$57.05

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$91.28

**Engineer - Steel Erection Oiler I**

On a Truck Crane

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$53.43

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime  
Shift Wage Rate: **\$85.49**

**Engineer - Steel Erection Oiler II**

On a Crawler Crane

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$40.84**  
Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime  
Shift Wage Rate: **\$65.34**

**Overtime Description**

On jobs of more than one shift, if the next shift employee fails to report for work through any cause over which the employer has no control, the employee on duty who works the next shift continues to work at the single time rate.

**Overtime**

Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.  
Double time the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day  
Lincoln's Birthday  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

---

**Engineer - Building Work Maintenance Engineers I**

Installing, repairing, maintaining, dismantling (of all equipment including: Steel Cutting and Bending Machines, Mechanical Heaters, Mine Hoists, Climbing Cranes, Tower Cranes, Linden Peine, Lorain, Liebherr, Mannes, or machines of a similar nature, Well Point Systems, Deep Well Pumps, Concrete Mixers with loading Device, Concrete Plants, Motor Generators when used for temporary power and lights), skid steer machines of a similar nature including bobcat.

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$54.04**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime

**Engineer - Building Work Maintenance Engineers II**

On Pumps, Generators, Mixers and Heaters

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$42.10**  
Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime

**Engineer - Building Work Oilers I**

All gasoline, electric, diesel or air operated Gradealls: Concrete Pumps, Overhead Cranes in Power Houses: Their duties shall be to assist the Engineer in oiling, greasing and repairing of all machines; Driving Truck Cranes: Driving and Operating Fuel and Grease Trucks, Cherrypickers (hydraulic cranes) over 70,000 GVW, and machines of a similar nature.

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$51.40**  
Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime

**Engineer - Building Work Oilers II**

Oilers on Crawler Cranes, Backhoes, Trenching Machines, Gunite Machines, Compressors (three or more in Battery).

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$38.31**  
Supplemental Benefit Rate per Hour: **\$31.93**  
Supplemental Note: \$57.46 on overtime

**Overtime Description**

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

**Overtime**

Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.  
Double time the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day  
Lincoln's Birthday  
President's Day  
Memorial Day  
Independence Day  
Labor Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Columbus Day  
Veteran's Day  
Thanksgiving Day  
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

### Shift Rates

Off Shift: double time the regular hourly rate.

(Local #15)

---

## ENGINEER - CITY SURVEYOR AND CONSULTANT

### Party Chief

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$35.55**

Supplemental Benefit Rate per Hour: **\$17.65**

### Instrument Person

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$29.41**

Supplemental Benefit Rate per Hour: **\$17.65**

### Rodperson

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$25.54**

Supplemental Benefit Rate per Hour: **\$17.65**

### Overtime Description

Overtime Benefit Rate - \$23.63 per hour (time & one half) \$29.95 per hour (double time).

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

### Paid Holidays

New Year's Day  
Lincoln's Birthday  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Christmas Day**

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

---

---

**ENGINEER - FIELD (BUILDING CONSTRUCTION)**  
**(Construction of Building Projects, Concrete Superstructures, etc.)**

**Field Engineer - BC Party Chief**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$55.40**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

**Field Engineer - BC Instrument Person**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$43.10**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

**Field Engineer - BC Rodperson**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$27.96**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

**Overtime Description**

Time and one half the regular rate after a 7 hour work and time and one half the regular rate for Saturday for the first seven hours worked, Double time the regular time rate for Saturday for work performed in excess of seven hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

**Paid Holidays**

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

(Operating Engineer Local #15-D)

---

---

**ENGINEER - FIELD (HEAVY CONSTRUCTION)**  
(Construction of Roads, Tunnels, Bridges, Sewers, Building Foundations,  
Engineering Structures etc.)

**Field Engineer - HC Party Chief**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$62.61

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

**Field Engineer - HC Instrument Person**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$46.00

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

**Field Engineer - HC Rodperson**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$38.61

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

**Overtime Description**

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

**Paid Holidays**

New Year's Day  
Lincoln's Birthday  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

(Operating Engineer Local #15-D)

---

## **ENGINEER - FIELD (STEEL ERECTION)**

### **Field Engineer - Steel Erection Party Chief**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$58.50**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

### **Field Engineer - Steel Erection Instrument Person**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$45.53**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

### **Field Engineer - Steel Erection Rodperson**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$30.43**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

### **Overtime Description**

Time and one half the regular rate for Saturday for the first eight hours worked.

Double time the regular rate for Saturday for work performed in excess of eight hours.

### **Overtime**

Time and one half the regular rate after an 8 hour day.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

### **Paid Holidays**

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

(Operating Engineer Local #15-D)

---

---

**ENGINEER - OPERATING**

**Operating Engineer - Road & Heavy Construction I**

Back Filling Machines, Cranes, Mucking Machines and Dual Drum Paver.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$67.70**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$108.32**

**Operating Engineer - Road & Heavy Construction II**

Backhoes, Power Shovels, Hydraulic Clam Shells, Steel Erection, Moles and machines of a similar nature.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$70.10**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **51.75** overtime hours

Shift Wage Rate: **\$112.16**

**Operating Engineer - Road & Heavy Construction III**

Mine Hoists, Cranes, etc. (Used as Mine Hoists)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$72.34**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$115.74**

**Operating Engineer - Road & Heavy Construction IV**

Gradealls, Keystones, Cranes on land or water (with digging buckets), Bridge Cranes, Vermeer Cutter and machines of a similar nature, Trenching Machines.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$70.63**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$113.01**

**Operating Engineer - Road & Heavy Construction V**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Pile Drivers & Rigs (employing Dock Builder foreperson): Derrick Boats, Tunnel Shovels.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$69.23**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$110.77**

**Operating Engineer - Road & Heavy Construction VI**

Mixers (Concrete with loading attachment), Concrete Pavers, Cableways, Land Derricks, Power Houses (Low Air Pressure Units).

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$65.76**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$105.22**

**Operating Engineer - Road & Heavy Construction VII**

Barrier Movers , Barrier Transport and Machines of a Similar Nature.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$53.08**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$84.93**

**Operating Engineer - Road & Heavy Construction VIII**

Utility Compressors

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$41.18**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$51.93**

**Operating Engineer - Road & Heavy Construction IX**

Horizontal Boring Rig

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$62.53**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$100.05**

**Operating Engineer - Road & Heavy Construction X**

Elevators (manually operated as personnel hoist).

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$57.46**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$91.94**

**Operating Engineer - Road & Heavy Construction XI**

Compressors (Portable 3 or more in battery), Driving of Truck Mounted Compressors, Well-point Pumps, Tugger Machines Well Point Pumps, Churn Drill.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$44.63**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$71.41**

**Operating Engineer - Road & Heavy Construction XII**

All Drills and Machines of a similar nature.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$66.45**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$106.32**

**Operating Engineer - Road & Heavy Construction XIII**

Concrete Pumps, Concrete Plant, Stone Crushers, Double Drum Hoist, Power Houses (other than above).

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$64.34**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$102.94**

**Operating Engineer - Road & Heavy Construction XIV**

Concrete Mixer

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$61.53**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$98.45**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Operating Engineer - Road & Heavy Construction XV**

Compressors (Portable Single or two in Battery, not over 100 feet apart), Pumps (River Cofferdam) and Welding Machines, Push Button Machines, All Engines Irrespective of Power (Power-Pac) used to drive auxiliary equipment, Air, Hydraulic, etc.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$41.44**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$66.30**

**Operating Engineer - Road & Heavy Construction XVI**

Concrete Breaking Machines, Hoists (Single Drum), Load Masters, Locomotives (over ten tons) and Dinkies over ten tons, Hydraulic Crane-Second Engineer.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$58.74**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.85 overtime hours

Shift Wage Rate: **\$93.98**

**Operating Engineer - Road & Heavy Construction XVII**

On-Site concrete plant engineer, On-site Asphalt Plant Engineer, and Vibratory console.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$59.21**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$94.74**

**Operating Engineer - Road & Heavy Construction XVIII**

Tower Crane

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$85.00**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$136.00**

**Operating Engineer - Paving I**

Asphalt Spreaders, Autogrades (C.M.I.), Roto/Mil

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$65.76**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours  
Shift Wage Rate: **\$105.22**

**Operating Engineer - Paving II**

Asphalt Roller

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$64.04**  
Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours  
Shift Wage Rate: **\$102.46**

**Operating Engineer - Paving III**

Asphalt Plants

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$54.17**  
Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours  
Shift Wage Rate: **\$86.67**

**Operating Engineer - Concrete I**

Cranes

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$70.32**  
Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Concrete II**

Compressors

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$41.76**  
Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Concrete III**

Micro-traps (Negative Air Machines), Vac-All Remediation System.

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$56.16**  
Supplemental Benefit Rate per Hour: **\$28.60**  
Supplemental Note: \$51.75 overtime hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Operating Engineer - Steel Erection I**

Three Drum Derricks

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$73.37**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$117.39**

**Operating Engineer - Steel Erection II**

Cranes, 2 Drum Derricks, Hydraulic Cranes, Fork Lifts and Boom Trucks.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$70.50**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$112.80**

**Operating Engineer - Steel Erection III**

Compressors, Welding Machines.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$41.84**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$66.94**

**Operating Engineer - Steel Erection IV**

Compressors - Not Combined with Welding Machine.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.85**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: **\$63.76**

**Operating Engineer - Building Work I**

Forklifts, Plaster (Platform machine), Plaster Bucket, Concrete Pump and all other equipment used for hoisting material.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$57.82**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Operating Engineer - Building Work II**

Compressors, Welding Machines (Cutting Concrete-Tank Work), Paint Spraying, Sandblasting, Pumps (with the exclusion of Concrete Pumps), All Engines irrespective of Power (Power-Pac) used to drive Auxiliary Equipment, Air, Hydraulic, Jacking System, etc.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$43.28

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Building Work III**

Double Drum

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$65.83

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Building Work IV**

Stone Derrick, Cranes, Hydraulic Cranes Boom Trucks.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$69.74

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Building Work V**

Dismantling and Erection of Cranes, Relief Engineer.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$64.26

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Building Work VI**

4 Pole Hoist, Single Drum Hoists.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$63.58

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

**Operating Engineer - Building Work VII**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Rack & Pinion and House Cars**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$50.53**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: \$51.75 overtime hours

For New House Car projects started after 7/1/11 only: Wage Rate per Hour \$40.31

**Overtime Description**

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

For House Cars and Rack & Pinion only: Overtime paid at time and one-half for all hours in excess of eight hours in a day, Saturday, Sunday and Holidays worked.

**Overtime**

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

**Shift Rates**

For Steel Erection Only: Shifts may be worked at the single time rate at other than the regular working hours (8:00 A.M. to 4:30 P.M.) on the following work ONLY: Heavy construction jobs on work below the street level, over railroad tracks and on building jobs.

(Operating Engineer Local #14)

---

---

**FLOOR COVERER**

(Interior vinyl composition tile, sheath vinyl linoleum and wood parquet tile including site preparation and synthetic turf not including site preparation)

**Floor Coverer**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$49.88**

Supplemental Benefit Rate per Hour: **\$44.10**

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

### Shift Rates

Two shifts may be utilized with the first shift working 8:00 A.M. to the end of the shift at the straight time of pay. The second shift will receive one hour at double time rate for the last hour of the shift. (eight for seven, nine for eight).

(Carpenters District Council)

---

---

## GLAZIER

(New Construction, Remodeling, and Alteration)

### Glazier

Effective Period: 7/1/2014 - 10/31/2014

Wage Rate per Hour: **\$42.50**

Supplemental Benefit Rate per Hour: **\$35.09**

Supplemental Note: Supplemental Benefit Overtime Rate: **\$43.59**

Effective Period: 11/1/2014 - 6/30/2015

Wage Rate per Hour: **\$42.85**

Supplemental Benefit Rate per Hour: **\$35.59**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: Supplemental Benefit Overtime Rate: \$44.09

### Overtime Description

An optional 8th hour can be worked at straight time rate. If 9th hour is worked, then both hours or more (8th & 9th or more) will be at the double time rate of pay.

### Overtime

Double time the regular rate after a 7 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

### Paid Holidays

None

### Shift Rates

Shifts shall be any 7 hours beyond 4:00 P.M. for which the glazier shall receive 8 hours pay for 7 hours worked.

(Local #1281)

---

## GLAZIER - REPAIR & MAINTENANCE

(For the Installation of Glass - All repair and maintenance work on a particular building, whenever performed, where the total cumulative contract value is under \$105,000. Except where enumerated (i.e. plate glass windows) does not apply to non-residential buildings.)

### Craft Jurisdiction for repair, maintenance and fabrication

Plate glass replacement, Residential glass replacement, Residential mirrors and shower doors, Storm windows and storm doors, Residential replacement windows, Herculite door repairs, Door closer repairs, Retrofit apartment house (non commercial buildings), Glass tinting.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$23.60

Supplemental Benefit Rate per Hour: \$19.04

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

### Overtime

Time and one half the regular rate after an 8 hour day.  
Double time the regular rate for Sunday.  
Time and one half the regular hourly rate after 40 hours in any work week.

### Paid Holidays

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

(Local #1281)

---

---

## HEAT AND FROST INSULATOR

### Heat & Frost Insulator

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$56.98**

Supplemental Benefit Rate per Hour: **\$34.81**

### Overtime Description

Double time shall be paid for supplemental benefits during overtime work.  
8th hour paid at time and one half.

### Overtime

Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Memorial Day  
Independence Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

Triple time the regular rate for work on the following holiday(s).  
Labor Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Paid Holidays**

None

**Shift Rates**

The first shift shall work seven hours at the regular straight time rate. The second and third shift shall work seven hours the regular straight time hourly rate plus a fourteen percent wage and benefit premium. Off hour work in occupied or retail buildings may be worked on weekdays with an increment of \$1.00 per hour and eight hours pay for seven (7) hours worked. Double time will apply for over seven (7) hours worked on weekdays, weekends or holidays.

(Local #12)

---

**HOUSE WRECKER  
(TOTAL DEMOLITION)**

**House Wrecker - Tier A**

On all work sites the first, second, eleventh and every third House Wrecker thereafter will be Tier A House Wreckers (i.e. 1st, 2nd, 11th, 14th etc). Other House Wreckers may be Tier B House Wreckers.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$34.51**

Supplemental Benefit Rate per Hour: **\$25.59**

**House Wrecker - Tier B**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$24.02**

Supplemental Benefit Rate per Hour: **\$19.12**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Paid Holidays**

None

(Mason Tenders District Council)

---

---

**IRON WORKER - ORNAMENTAL**

**Iron Worker - Ornamental**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$42.70**

Supplemental Benefit Rate per Hour: **\$45.77**

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

**Overtime Description**

Time and one half the regular rate after a 7 hour day for a maximum of two hours on any regular work day (the 8th and 9th hour) and double time shall be paid for all work on a regular work day thereafter, time and one half the regular rate for Saturday for the first seven hours of work and double time shall be paid for all work on a Saturday thereafter.

**Overtime**

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

None

**Shift Rates**

For off shift work - 8 hours pay for 7 hours of work. When two or three shifts are employed on a job, Monday through Friday, the workday for each shift shall be seven hours and paid for ten and one-half hours at the single time rate. When two or three shifts are worked on Saturday, Sunday or holidays, each shift shall be seven hours and paid fifteen and three-quarters hours.

(Local #580)

---

---

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**IRON WORKER - STRUCTURAL**

**Iron Worker - Structural**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$47.75

Supplemental Benefit Rate per Hour: \$65.35

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

**Overtime Description**

Monday through Friday- the first eight hours are paid at straight time, the 9th and 10th hours are paid at time and one-half the regular rate, all additional weekday overtime is paid at double the regular rate. Saturdays- the first eight hours are paid at time and one-half the regular rate, double time thereafter. Sunday-all shifts are paid at double time.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

**Shift Rates**

Monday through Friday - First Shift: First eight hours are paid at straight time, the 9th & 10th hours are paid at time and a half, double time paid thereafter. Second and third Shifts: First eight hours are paid at time and one-half, double time thereafter. Saturdays: All shifts, first eight hours paid at time and one-half, double time thereafter: Sunday all shifts are paid at double time.

(Local #40 & #361)

---

---

**LABORER**

**(Foundation, Concrete, Excavating, Street Pipe Layer and Common)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Laborer**

Excavation and foundation work for buildings, heavy construction, engineering work, and hazardous waste removal in connection with the above work. Landscaping tasks in connection with heavy construction work, engineering work and building projects. Projects include, but are not limited to pollution plants, sewers, parks, subways, bridges, highways, etc.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.85**

Supplemental Benefit Rate per Hour: **\$34.88**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

Labor Day

Thanksgiving Day

**Shift Rates**

When two shifts are employed, single time rate shall be paid for each shift. When three shifts are found necessary, each shift shall work seven and one half hours (7 ½), but shall be paid for eight (8) hours of labor, and be permitted one half hour for lunch.

(Local #731)

---

---

**LANDSCAPING**

(Landscaping tasks, as well as tree pruning, tree removing, spraying and maintenance in connection with the planting of street trees and the planting of trees in city parks but not when such activities are performed as part of, or in connection with, other construction or reconstruction projects.)

**Landscaper (Above 6 years experience)**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$25.75**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Landscaper (3 - 6 years experience)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$24.75**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Landscaper (up to 3 years experience)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$22.25**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Groundperson**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$22.25**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Tree Remover / Pruner**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$30.75**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Landscaper Sprayer (Pesticide Applicator)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$20.75**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Watering - Plant Maintainer**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$15.75**  
Supplemental Benefit Rate per Hour: **\$13.80**

**Overtime Description**

For all overtime work performed, supplemental benefits shall include an additional seventy-five (\$0.75) cents per hour.

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.  
Time and one half the regular rate for work on a holiday plus the day's pay.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 PREVAILING WAGE SCHEDULE

**Paid Holidays**

New Year's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

**Shift Rates**

Work performed on a 4pm to 12am shift has a 15% differential. Work performed on a 12am to 8am shift has a 20% differential.

(Local #175)

---

**MARBLE MECHANIC**

**Marble Setter**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$50.85**

Supplemental Benefit Rate per Hour: **\$34.21**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$51.15**

Supplemental Benefit Rate per Hour: **\$34.87**

**Marble Finisher**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$39.99**

Supplemental Benefit Rate per Hour: **\$33.34**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$40.26**

Supplemental Benefit Rate per Hour: **\$33.90**

**Marble Polisher**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$35.96**

Supplemental Benefit Rate per Hour: **\$25.92**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$36.25**

Supplemental Benefit Rate per Hour: **\$26.28**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

### Overtime Description

Supplemental Benefit contributions are to be made at the applicable overtime rates. Time and one half the regular rate after a 7 hour day or time and one half the regular rate after an 8 hour day - chosen by Employer at the start of the project and then would last for the full duration of the project.

### Overtime

Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

### Paid Holidays

None

(Local #7)

---

---

## MASON TENDER

### Mason Tender

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$36.05**

Supplemental Benefit Rate per Hour: **\$26.74**

### Overtime

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.  
Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).  
New Year's Day  
President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 PREVAILING WAGE SCHEDULE

Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

### **Paid Holidays**

None

### **Shift Rates**

The Employer may work two (2) shifts with the first shift at the straight time wage rate and the second shift receiving eight (8) hours paid for seven (7) hours work at the straight time wage rate.

(Local #79)

---

---

## **MASON TENDER (INTERIOR DEMOLITION WORKER)**

(The erection, building, moving, servicing and dismantling of enclosures, scaffolding, barricades, protection and site safety structures etc., on Interior Demolition jobs.)

### **Mason Tender Tier A**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$34.99**

Supplemental Benefit Rate per Hour: **\$21.10**

### **Mason Tender Tier B**

On Interior Demolition job sites 33 1/3 % of the employees shall be classified as Tier A Interior Demolition Workers and 66 2/3 % shall be classified as Tier B Interior Demolition Workers; provided that the employer may employ more than 33 1/3 % Tier A Interior Demolition Workers on the job site. Where the number of employees on a job site is not divisible by 3, the first additional employee (above the number of employees divisible by three) shall be a Tier B Interior Demolition Worker, and the second additional employee shall be a Tier A Interior Demolition Worker.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$24.18**

Supplemental Benefit Rate per Hour: **\$15.42**

### **Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

President's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

None

(Local #79)

---

---

**METALLIC LATHER**

**Metallic Lather**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$42.03**

Supplemental Benefit Rate per Hour: **\$41.07**

Supplemental Note: Supplemental benefits for overtime are paid at the appropriate overtime rate.

**Overtime Description**

Overtime would be time and one half the regular rate after a seven (7) or eight (8) hours workday, which would be set at the start of the job.

**Overtime**

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Washington's Birthday  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

**Shift Rates**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

There shall be either two (2) or three (3) shifts, each shift shall be eight (8) hours with nine (9) hours pay, including one half (½) hour for lunch. Off-Hour Start shall commence after 3:30 P.M. and shall conclude by 6:00 A.M. The first consecutive seven (7) hours shall be at straight time with a differential of twelve dollars (\$12.00) per hour. Fringes shall be paid at the straight time rate.

(Local #46)

---

---

## MILLWRIGHT

### Millwright

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$48.44

Supplemental Benefit Rate per Hour: \$50.52

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

### Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

### Shift Rates

The first shift shall receive the straight time rate of pay. The second shift receives the straight time rate of pay plus fifteen (15%) per cent. Members of the second shift shall be allowed one half hour to eat, with this time being included in the hours of the workday established. There must be a first shift to work a second shift. All additional hours worked shall be paid at the time and one-half rate of pay plus fifteen (15%) per cent for weekday hours.

(Local #740)

## **MOSAIC MECHANIC**

### **Mosaic Mechanic - Mosaic & Terrazzo Mechanic**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$45.23**

Supplemental Benefit Rate per Hour: **\$36.59**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$47.56 per hour.

### **Mosaic Mechanic - Mosaic & Terrazzo Finisher**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$43.63**

Supplemental Benefit Rate per Hour: **\$36.57**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$47.54 per hour.

### **Mosaic Mechanic - Machine Operator Grinder**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$43.63**

Supplemental Benefit Rate per Hour: **\$36.57**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$47.54 per hour.

### **Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Good Friday

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### **Paid Holidays**

None

(Local #7)

---

## **PAINTER**

### **Painter - Brush & Roller**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.50**

Supplemental Benefit Rate per Hour: **\$26.12**

Supplemental Note: \$30.75 on overtime

### **Spray & Scaffold / Decorative / Sandblast**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$42.50**

Supplemental Benefit Rate per Hour: **\$26.12**

Supplemental Note: \$30.75 on overtime

### **Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

### **Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

### **Paid Holidays**

None

(District Council of Painters #9)

---

---

## **PAINTER - SIGN**

### **Designer**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$36.15**

Supplemental Benefit Rate per Hour: **\$9.66**

### **Journey person**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$33.62

Supplemental Benefit Rate per Hour: \$9.66

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

### Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### Shift Rates

All work performed outside the regular 8 hour work day (either 7:00 A.M to 3:30 P.M or 8:00 A.M. to 4:30 P.M) shall be paid at time and one half the regular hourly rate.

(Local #8A-28A)

---

## PAINTER - STRIPER

### Striper (paint)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$34.00

Supplemental Benefit Rate per Hour: \$12.60

Supplemental Note: Overtime Supplemental Benefit rate - \$8.35 New Hire Rate (0-3 months) - \$0.00

### Lineperson (thermoplastic)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$38.00

Supplemental Benefit Rate per Hour: \$12.60

Supplemental Note: Overtime Supplemental Benefit rate - \$8.35; New Hire Rate (0-3 months) - \$0.00

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for Sunday.  
Time and one half the regular rate for work on the following holiday(s).

**Paid Holidays**

- New Year's Day
- Good Friday
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Presidential Election Day
- Thanksgiving Day
- Day after Thanksgiving
- Christmas Day

**Shift Rates**

Employees hired before April 1, 2003: 15% night shift premium differential for work commenced at 9:00 PM or later.

**Vacation**

Employees with one to two years service shall accrue vacation based on hours worked: 250 hours worked - 1 day vacation; 500 hours worked - 2 days vacation; 750 hours worked - 3 days vacation; 900 hours worked - 4 days vacation; 1,000 hours worked - 5 days vacation. Employees with two to five years service receive two weeks vacation. Employees with five to twenty years service receive three weeks vacation. Employees with twenty to twenty-five years service receive four weeks vacation. Employees with 25 or more years service receive five weeks vacation. Vacation must be taken during winter months. 2 Personal Days except employees hired after 4/1/12 who do not have 2 years of service.

(Local #917)

---

---

**PAINTER - STRUCTURAL STEEL**

**Painters on Structural Steel**

Effective Period: 7/1/2014 - 9/30/2014  
Wage Rate per Hour: **\$47.00**  
Supplemental Benefit Rate per Hour: **\$33.58**

Effective Period: 10/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$48.75**  
Supplemental Benefit Rate per Hour: **\$34.58**

**Painter - Power Tool**

Effective Period: 7/1/2014 - 9/30/2014  
Wage Rate per Hour: **\$53.00**  
Supplemental Benefit Rate per Hour: **\$33.58**

Effective Period: 10/1/2014 - 6/30/2015

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$54.75

Supplemental Benefit Rate per Hour: \$34.58

### Overtime Description

Supplemental Benefits shall be paid for each hour worked, up to forty (40) hours per week for the period of May 1st to November 15th or up to fifty (50) hours per week for the period of November 16th to April 30th.

### Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

### Paid Holidays

None

### Shift Rates

Regular hourly rates plus a ten per cent (10%) differential

(Local #806)

---

## PAPERHANGER

### Paperhanger

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$41.08

Supplemental Benefit Rate per Hour: \$29.23

Supplemental Note: Supplemental benefits are to be paid at the appropriate straight time and overtime rate.

### Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

### Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

Evening shift - 4:30 P.M. to 12:00 Midnight (regular rate of pay); any work performed before 7:00 A.M. shall be at time and one half the regular base rate of pay.

(District Council of Painters #9)

---

---

**PAVER AND ROADBUILDER**

**Paver & Roadbuilder - Formsetter**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$44.19**

Supplemental Benefit Rate per Hour: **\$35.15**

**Paver & Roadbuilder - Laborer**

Paving and road construction work, regardless of material used, including but not limited to preparation of job sites, removal of old surfaces, asphalt and/or concrete, by whatever method, including but not limited to milling; laying of concrete; laying of asphalt for temporary, patchwork, and utility paving (but not production paving); site preparation and incidental work before the installation of rubberized materials and similar surfaces; installation and repair of temporary construction fencing; slurry seal coating, maintenance of safety surfaces; play equipment installation, and other related work.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$40.32**

Supplemental Benefit Rate per Hour: **\$35.15**

**Production Paver & Roadbuilder - Screed Person**

(Production paving is asphalt paving when using a paving machine or on a project where a paving machine is traditionally used)

Adjustment of paving machinery on production paving jobs.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$45.24**

Supplemental Benefit Rate per Hour: **\$35.15**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Production Paver & Roadbuilder - Raker**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$44.73**

Supplemental Benefit Rate per Hour: **\$35.15**

**Production Paver & Roadbuilder - Shoveler**

General laborer (except removal of surfaces - see Paver and Roadbuilder-Laborer) including but not limited to tamper, AC paint and liquid tar work.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$41.44**

Supplemental Benefit Rate per Hour: **\$35.15**

**Overtime Description**

Veteran's Day is a Paid Holiday for employees working on production paving.

If an employee works New Year's Day or Christmas Day, they receive the single time rate plus 25%.

Employees who work on a holiday listed below receive the straight time rate plus one day's pay for the holiday.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Paid Holidays**

Memorial Day

Independence Day

Labor Day

Presidential Election Day

Thanksgiving Day

**Shift Rates**

When two shifts are employed, the work period for each shift shall be a continuous eight (8) hours. When three shifts are employed, each shift will work seven and one half (7 ½) hours but will be paid for eight (8) hours since only one half (1/2) hour is allowed for meal time.

When two or more shifts are employed, single time will be paid for each shift.

Night Work - On night work, the first eight (8) hours of work will be paid for at the single time rate, except that production paving work shall be paid at 15% over the single time rate for the screed person, rakers and shovelers directly involved only. All other workers will be exempt. Hours worked over eight (8) hours during said shift shall be paid for at the time and one-half rate.

(Local #1010)

---

---

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**PLASTERER**

**Plasterer**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$42.43

Supplemental Benefit Rate per Hour: \$27.95

**Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

When it is not possible to conduct alteration work during regular work hours, in a building occupied by tenants, said work shall proceed on a shift basis: however work over seven (7) hours in any twenty four (24) hour period, the time after seven (7) hours shall be considered overtime.

The second shift shall start at a time between 3:30 p.m. and 7:00 p.m. and shall consist of seven (7) working hours and shall receive eight (8) hours of wages and benefits at the straight time rate. The workers on the second shift shall be allowed one-half (1/2) hour to eat with this time being included in the seven (7) hours of work.

(Local #530)

---

---

**PLASTERER - TENDER**

**Plasterer - Tender**

Effective Period: 7/1/2014 - 6/30/2015

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$35.53**  
Supplemental Benefit Rate per Hour: **\$26.31**

### Overtime

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.  
Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).  
New Year's Day  
Washington's Birthday  
Memorial Day  
Independence Day  
Labor Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

### Paid Holidays

None

### Shift Rates

When work commences outside regular work hours, workers receive an hour additional (differential) wage and supplement payment. Eight hours pay for seven hours work or nine hours pay for eight hours work.

(Mason Tenders District Council)

---

---

## PLUMBER

### Plumber

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$65.27**  
Supplemental Benefit Rate per Hour: **\$25.78**  
Supplemental Note: Overtime supplemental benefit rate per hour: **\$40.78**

### Plumber - Temporary Services

Temporary Services - When there are no Plumbers on the job site, there may be three shifts designed to cover the entire twenty-four hour period, including weekends if necessary, at the following rate straight time.

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$52.24**  
Supplemental Benefit Rate per Hour: **\$20.20**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

### **Overtime Description**

Double time the regular rate after a 7 hour day - unless for new construction site work where the plumbing contract price is \$1.5 million or less, the hours of labor can be 8 hours per day at the employers option. On Alteration jobs when other mechanical trades at the site are working an eighth hour at straight time, then the plumber shall also work an eighth hour at straight time.

### **Overtime**

Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

### **Shift Rates**

Shift work, when directly specified in public agency or authority documents where plumbing contract is \$8 million or less, will be permitted. 30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday. 50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

---

---

## **PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)**

(Mechanical Equipment and Service work shall include any repair and/or replacement of the present plumbing system.)

### **Plumber**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$38.27**

Supplemental Benefit Rate per Hour: **\$12.84**

### **Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Time and one half the regular rate for Sunday.



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

**Paid Holidays**

None

(Plumbers Local # 1)

---

---

**PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME  
CONSTRUCTION)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$45.19**

Supplemental Benefit Rate per Hour: **\$18.79**

**Overtime**

Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday.  
50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

(Plumbers Local #1)

---

---

**PLUMBER: PUMP & TANK**  
**Oil Trades (Installation and Maintenance)**

**Plumber - Pump & Tank**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$62.83

Supplemental Benefit Rate per Hour: \$21.37

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

**Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

**Paid Holidays**

None

**Shift Rates**

All work outside the regular workday (8:00 A.M. to 3:30 P.M.) is to be paid at time and one half the regular hourly rate

(Plumbers Local #1)

---

---

**POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING  
RENOVATION)**

**Pointer - Waterproofer, Caulker Mechanic**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$47.41

Supplemental Benefit Rate per Hour: \$24.40

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

### Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

### Paid Holidays

None

### Shift Rates

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:30 P.M.) is to be paid at time and one half the regular rate.

(Bricklayer District Council)

---

---

## ROOFER

### Roofer

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$40.70

Supplemental Benefit Rate per Hour: \$28.67

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

### Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

President's Day  
Memorial Day  
Independence Day  
Labor Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

Second shift - Regular hourly rate plus a 10% differential. Third shift - Regular hourly rate plus a 15% differential.

(Local #8)

---

---

**SANDBLASTER - STEAMBLASTER  
(Exterior Building Renovation)**

**Sandblaster / Steamblaster**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$47.41

Supplemental Benefit Rate per Hour: \$24.40

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

**Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

None

**Shift Rates**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 PREVAILING WAGE SCHEDULE

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:30 P.M.) is to be paid at time and one half the regular rate.

(Bricklayer District Council)

---

---

## **SHEET METAL WORKER**

### **Sheet Metal Worker**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$46.21**

Supplemental Benefit Rate per Hour: **\$43.89**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

### **Sheet Metal Worker - Fan Maintenance**

(The temporary operation of fans or blowers in new or existing buildings for heating and/or ventilation, and/or air conditioning prior to the completion of the project.)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$36.97**

Supplemental Benefit Rate per Hour: **\$43.89**

### **Sheet Metal Worker - Duct Cleaner**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$12.90**

Supplemental Benefit Rate per Hour: **\$8.07**

### **Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Paid Holidays**

None

**Shift Rates**

Work that can only be performed outside regular working hours (seven hours of work between 7:30 A.M. and 3:30 P.M.) - First shift (work between 3:30 P.M. and 11:30 P.M.) - 10% differential above the established hourly rate.  
Second shift (work between 11:30 P.M. and 7:30 A.M.) - 15% differential above the established hourly rate.

For Fan Maintenance: On all full shifts of fan maintenance work the straight time hourly rate of pay will be paid for each shift, including nights, Saturdays, Sundays, and holidays. No journey person engaged in fan maintenance shall work in excess of forty (40) hours in any work week.

(Local #28)

---

---

**SHEET METAL WORKER - SPECIALTY  
(Decking & Siding)**

**Sheet Metal Specialty Worker**

The first worker to perform this work must be paid at the rate of the Sheet Metal Worker. The second and third workers shall be paid the Specialty Worker Rate. The ratio of One Sheet Metal Worker, then Two Specialty Workers shall be utilized thereafter.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$40.78**

Supplemental Benefit Rate per Hour: **\$23.38**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

None

(Local #28)

---

---

## **SHIPYARD WORKER**

### **Shipyard Mechanic - First Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$23.83**

Supplemental Benefit Rate per Hour: **\$2.87**

### **Shipyard Mechanic - Second Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$15.44**

Supplemental Benefit Rate per Hour: **\$2.54**

### **Shipyard Laborer - First Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$19.28**

Supplemental Benefit Rate per Hour: **\$2.69**

### **Shipyard Laborer - Second Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$12.36**

Supplemental Benefit Rate per Hour: **\$2.43**

### **Shipyard Dockhand - First Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$22.68**

Supplemental Benefit Rate per Hour: **\$2.82**

### **Shipyard Dockhand - Second Class**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$14.22**

Supplemental Benefit Rate per Hour: **\$2.50**

## **Overtime Description**

Work performed on holiday is paid double time the regular hourly wage rate plus holiday pay.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.  
Time and one half the regular hourly rate after 40 hours in any work week.

**Paid Holidays**

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

Based on Survey Data

---

---

**SIGN ERECTOR**  
**(Sheet Metal, Plastic, Electric, and Neon)**

**Sign Erector**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$44.20**  
Supplemental Benefit Rate per Hour: **\$44.10**

**Overtime**

Time and one half the regular rate after a 7 hour day.  
Time and one half the regular rate for Saturday.  
Time and one half the regular rate for Sunday.  
Time and one half the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day  
Washington's Birthday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Election Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Shift Rates**

Time and one half the regular hourly rate is to be paid for all hours worked outside the regular workday either (7:00 A.M. through 2:30 P.M.) or (8:00 A.M. through 3:30 P.M.)

(Local #137)

---

**STEAMFITTER**

**Steamfitter I**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$53.25**

Supplemental Benefit Rate per Hour: **\$51.04**

Supplemental Note: Overtime supplemental benefit rate: \$101.34

**Overtime**

Double time the regular rate after a 7 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

**Paid Holidays**

None

**Shift Rates**

Work performed between 3:30 P.M. and 7:00 A.M. and on Saturdays, Sundays and Holidays shall be at double time the regular hourly rate and paid at the overtime supplemental benefit rate above.

---

**Steamfitter II**

For heating, ventilation, air conditioning and mechanical public works contracts with a dollar value not to exceed \$15,000,000 and for fire protection/sprinkler public works contracts not to exceed \$1,500,000.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$53.25

Supplemental Benefit Rate per Hour: \$51.04

Supplemental Note: Overtime supplemental benefit rate: \$101.34

### Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

### Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### Paid Holidays

None

### Shift Rates

May be performed outside of the regular workday except Saturday, Sunday and Holidays. A shift shall consist of eight working hours. All work performed in excess of eight hours shall be paid at double time. No shift shall commence after 7:00 P.M. on Friday or 7:00 P.M. the day before holidays. All work performed after 12:01 A.M. Saturday or 12:01 A.M. the day before a Holiday will be paid at double time. When shift work is performed the wage rate for regular time worked is a thirty percent premium together with fringe benefits.

On Transit Authority projects, where work is performed in the vicinity of tracks all shift work on weekends and holidays may be performed at the regular shift rates.

Local #638

---

## STEAMFITTER - REFRIGERATION AND AIR CONDITIONER (Maintenance and Installation Service Person)

### Refrigeration and Air Conditioner Mechanic

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$38.30

Supplemental Benefit Rate per Hour: \$12.76

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Refrigeration and Air Conditioner Service Person V**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$31.47**

Supplemental Benefit Rate per Hour: **\$11.55**

**Refrigeration and Air Conditioner Service Person IV**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$26.07**

Supplemental Benefit Rate per Hour: **\$10.52**

**Refrigeration and Air Conditioner Service Person III**

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$22.38**

Supplemental Benefit Rate per Hour: **\$9.76**

**Refrigeration and Air Conditioner Service Person II**

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$18.56**

Supplemental Benefit Rate per Hour: **\$9.06**

**Refrigeration and Air Conditioner Service Person I**

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$13.57**

Supplemental Benefit Rate per Hour: **\$8.30**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

Independence Day

Labor Day

Veteran's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Thanksgiving Day  
Christmas Day

Double time and one half the regular rate for work on the following holiday(s).

Martin Luther King Jr. Day  
President's Day  
Memorial Day  
Columbus Day

### **Paid Holidays**

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Christmas Day

(Local #638B)

---

## **STONE MASON - SETTER**

### **Stone Mason - Setters**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$46.56**

Supplemental Benefit Rate per Hour: **\$36.40**

### **Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

### **Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day  
Washington's Birthday  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

### **Paid Holidays**

1/2 day on Christmas Eve if work is performed in the A.M.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

### Shift Rates

For all work outside the regular workday (8:00 A.M. to 3:30 P.M. Monday through Friday), the pay shall be straight time plus a ten percent (10%) differential.

(Bricklayers District Council)

---

---

### TAPER

#### Drywall Taper

Effective Period: 7/1/2014 - 12/30/2014

Wage Rate per Hour: **\$45.32**

Supplemental Benefit Rate per Hour: **\$22.66**

Effective Period: 12/31/2014 - 6/30/2015

Wage Rate per Hour: **\$45.82**

Supplemental Benefit Rate per Hour: **\$22.66**

#### Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

#### Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

#### Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

### Shift Rates

Time and one half the regular rate outside the regular work hours (8:00 A.M. through 3:30 P.M.)

(Local #1974)

---

**TELECOMMUNICATION WORKER  
(Voice Installation Only)**

**Telecommunication Worker**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$39.18**

Supplemental Benefit Rate per Hour: **\$13.19**

Supplemental Note: The above rate applies for Manhattan, Bronx, Brooklyn, Queens. \$12.64 for Staten Island only.

**Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

**Overtime Holidays**

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

**Paid Holidays**

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees have the option of observing either Martin Luther King's Birthday or the day after Thanksgiving instead of Lincoln's Birthday

**Shift Rates**

For any workday that starts before 8A.M. or ends after 6P.M. there is a 10% differential for the applicable worker's hourly rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Vacation**

After 6 months.....one week.  
After 12 months but less than 7 years.....two weeks.  
After 7 or more but less than 15 years.....three weeks.  
After 15 years or more but less than 25 years.....four weeks.

(C.W.A.)

---

**TILE FINISHER**

**Tile Finisher**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$38.80**  
Supplemental Benefit Rate per Hour: **\$28.03**

**Overtime**

Time and one half the regular rate after a 7 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).  
New Year's Day  
President's Day  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Veteran's Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

---

**TILE LAYER - SETTER**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

**Tile Layer - Setter**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$49.88**

Supplemental Benefit Rate per Hour: **\$32.36**

**Overtime**

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

**Shift Rates**

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

---

---

**TIMBERPERSON**

**Timberperson**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$44.33**

Supplemental Benefit Rate per Hour: **\$45.39**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Time and one half the regular hourly rate after 40 hours in any work week.

**Overtime Holidays**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for work on the following holiday(s).

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Presidential Election Day  
Thanksgiving Day  
Christmas Day

**Paid Holidays**

None

**Shift Rates**

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Local #1536)

---

---

**TUNNEL WORKER**

**Blasters, Mucking Machine Operators (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$54.20

Supplemental Benefit Rate per Hour: \$48.20

**Tunnel Workers (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$52.31

Supplemental Benefit Rate per Hour: \$46.59

**Top Nipper (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$51.35

Supplemental Benefit Rate per Hour: \$45.78

**Outside Lock Tender, Outside Gauge Tender, Muck Lock Tender (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$50.42

Supplemental Benefit Rate per Hour: \$44.91

**Bottom Bell & Top Bell Signal Person: Shaft Person (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$50.42**  
Supplemental Benefit Rate per Hour: **\$44.92**

**Changehouse Attendant: Powder Watchperson (Compressed Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$43.94**  
Supplemental Benefit Rate per Hour: **\$42.55**

**Blasters (Free Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$51.72**  
Supplemental Benefit Rate per Hour: **\$46.03**

**Tunnel Workers (Free Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$49.48**  
Supplemental Benefit Rate per Hour: **\$44.06**

**All Others (Free Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$45.73**  
Supplemental Benefit Rate per Hour: **\$40.75**

**Microtunneling (Free Air Rates)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$39.58**  
Supplemental Benefit Rate per Hour: **\$35.25**

**Overtime Description**

For Repair-Maintenance Work on Existing Equipment and Facilities - Time and one half the regular rate after a 7 hour day, or for Saturday, or for Sunday. Double time the regular rate for work on a holiday.  
For Small-Bore Micro Tunneling Machines - Time and one-half the regular rate shall be paid for all overtime.

**Overtime**

Double time the regular rate after an 8 hour day.  
Double time the regular time rate for Saturday.  
Double time the regular rate for Sunday.  
Double time the regular rate for work on the following holiday(s).

**Paid Holidays**

New Year's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 PREVAILING WAGE SCHEDULE

Lincoln's Birthday  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Election Day  
Veteran's Day  
Thanksgiving Day  
Christmas Day

(Local #147)

---

---

**WELDER**  
**TO BE PAID AT THE RATE OF THE JOURNEYPERSON IN THE TRADE**  
**PERFORMING THE WORK.**

**OFFICE OF THE COMPTROLLER**

**CITY OF NEW YORK**

**220 APPRENTICESHIP PREVAILING WAGE SCHEDULE**

**APPENDIX**

Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant and registered with the New York State Department of Labor, may be employed on a public work project.

Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the journey person wage rate for the classification of work he actually performed.

Apprentice ratios are established to ensure the proper safety, training and supervision of apprentices. A ratio establishes the number of journey workers required for each apprentice in a program and on a job site. Ratios are interpreted as follows: in the case of a 1:1, 1:4 ratio, there must be one journey worker for the first apprentice, and four additional journey workers for each subsequent apprentice.

## TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER.....	3
BOILERMAKER.....	3
BRICKLAYER.....	4
CARPENTER.....	5
CEMENT MASON.....	6
CEMENT AND CONCRETE WORKER.....	6
DERRICKPERSON & RIGGER (STONE).....	7
DOCKBUILDER/PILE DRIVER.....	8
ELECTRICIAN.....	8
ELEVATOR CONSTRUCTOR.....	11
ELEVATOR REPAIR & MAINTENANCE.....	12
ENGINEER.....	13
ENGINEER - OPERATING.....	14
FLOOR COVERER.....	14
GLAZIER.....	15
HEAT & FROST INSULATOR.....	16
HOUSE WRECKER.....	17
IRON WORKER - ORNAMENTAL.....	17
IRON WORKER - STRUCTURAL.....	18
LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE LAYER & COMMON)....	19
MARBLE MECHANICS.....	19
MASON TENDER.....	21
METALLIC LATHER.....	21
MILLWRIGHT.....	22
PAVER AND ROADBUILDER.....	23
PAINTER.....	24
PAINTER - STRUCTURAL STEEL.....	24
PLASTERER.....	25
PLUMBER.....	26
POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING RENOVATION) .	27
ROOFER.....	27
SHEET METAL WORKER.....	28
SIGN ERECTOR.....	29
STEAMFITTER.....	31
STONE MASON - SETTER.....	31
TAPER.....	32
TILE LAYER - SETTER.....	33
TIMBERPERSON.....	33

**ASBESTOS HANDLER**

(Ratio of Apprentice Journeyperson: 1 to 1, 1 to 3)

**Asbestos Handler (First 1000 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 78% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$15.45

**Asbestos Handler (Second 1000 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$15.45

**Asbestos Handler (Third 1000 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 83% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$15.45

**Asbestos Handler (Fourth 1000 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 89% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$15.45

(Local #78)

---

---

**BOILERMAKER**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

**Boilermaker (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$29.74

**Boilermaker (Second Year: 1st Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$31.40

**Boilermaker (Second Year: 2nd Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$33.05

**Boilermaker (Third Year: 1st Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rat  
Supplemental Benefit Rate Per Hour: \$34.69

**Boilermaker (Third Year: 2nd Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 85% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$36.34

**Boilermaker (Fourth Year: 1st Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 90% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$38.00

**Boilermaker (Fourth Year: 2nd Six Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 95% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$39.65

(Local #5)

---

---

**BRICKLAYER**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

**Bricklayer (First 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$17.10

**Bricklayer (Second 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyperson's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour: \$17.10

**Bricklayer (Third 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 70% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$17.10

**Bricklayer (Fourth 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$17.10

**Bricklayer (Fifth 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 90% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$17.10

**Bricklayer (Sixth 750 Hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 95% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$17.10

(Bricklayer District Council)

---

---

**CARPENTER**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

**Carpenter (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$30.25

**Carpenter (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$30.25

**Carpenter (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 65% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$30.25

**Carpenter (Fourth Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$30.25

(Carpenters District Council)

---

---

**CEMENT MASON**  
**(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)**

**Cement Mason (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 50% of Journeyperson's Rate

**Cement Mason (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 60% of Journeyperson's Rate

**Cement Mason (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 70% of Journeyperson's Rate

(Local #780)

---

---

**CEMENT AND CONCRETE WORKER**  
**(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)**

**Cement & Concrete Worker (0 - 500 hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Benefit Rate Per Hour: \$18.04

**Cement & Concrete Worker (501 - 1000 hours)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$18.87

**Cement & Concrete Worker (1001 - 2000 hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$24.25

**Cement & Concrete Worker (2001 - 4000 hours)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$25.07

(Cement Concrete Workers District Council)

---

**DERRICKPERSON & RIGGER (STONE)**  
**(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)**

**Derrickperson & Rigger (stone) - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: 50% of Journeyman's rate

**Derrickperson & Rigger (stone) - Second Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 70% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

**Derrickperson & Rigger (stone) - Second Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

**Derrickperson & Rigger (stone) - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 90% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #197)

---

---

**DOCKBUILDER/PILE DRIVER**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 6)

**Dockbuilder/Pile Driver (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$31.26

**Dockbuilder/Pile Driver (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$31.26

**Dockbuilder/Pile Driver (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$31.26

**Dockbuilder/Pile Driver (Fourth Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Benefit Rate Per Hour: \$31.26

(Carpenters District Council)

---

---

**ELECTRICIAN**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Electrician (First Term: 0-6 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$12.50  
Supplemental Benefit Rate per Hour: \$11.10  
Overtime Supplemental Rate Per Hour: \$11.93

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$13.00  
Supplemental Benefit Rate per Hour: \$11.61  
Overtime Supplemental Rate Per Hour: \$12.47

**Electrician (First Term: 7-12 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$13.50  
Supplemental Benefit Rate per Hour: \$11.62  
Overtime Supplemental Rate Per Hour: \$12.51

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$14.00  
Supplemental Benefit Rate per Hour: \$12.12  
Overtime Supplemental Rate Per Hour: \$13.04

**Electrician (Second Term: 0-6 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$14.50  
Supplemental Benefit Rate per Hour: \$12.13  
Overtime Supplemental Rate Per Hour: \$13.08

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$15.00  
Supplemental Benefit Rate per Hour: \$12.63  
Overtime Supplemental Rate Per Hour: \$13.62

**Electrician (Second Term: 7-12 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$15.50  
Supplemental Benefit Rate per Hour: \$12.64  
Overtime Supplemental Rate Per Hour: \$13.66

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$16.00  
Supplemental Benefit Rate per Hour: \$13.14  
Overtime Supplemental Rate Per Hour: \$14.19

**Electrician (Third Term: 0-6 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$16.50  
Supplemental Benefit Rate per Hour: \$13.15  
Overtime Supplemental Rate Per Hour: \$14.23

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$17.00

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$13.65  
Overtime Supplemental Rate Per Hour: \$14.77

**Electrician (Third Term: 7-12 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$17.50  
Supplemental Benefit Rate per Hour: \$13.65  
Overtime Supplemental Rate Per Hour: \$14.81

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$18.00  
Supplemental Benefit Rate per Hour: \$14.16  
Overtime Supplemental Rate Per Hour: \$15.34

**Electrician (Fourth Term: 0-6 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$18.50  
Supplemental Benefit Rate per Hour: \$14.16  
Overtime Supplemental Rate Per Hour: \$15.38

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$19.00  
Supplemental Benefit Rate per Hour: \$14.67  
Overtime Supplemental Rate Per Hour: \$15.92

**Electrician (Fourth Term: 7-12 Months)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$20.50  
Supplemental Benefit Rate per Hour: \$15.18  
Overtime Supplemental Rate Per Hour: \$16.53

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$21.00  
Supplemental Benefit Rate per Hour: \$15.68  
Overtime Supplemental Rate Per Hour: \$17.07

**Electrician (Fifth Term: 0-12 Months - Hired on or after 5/10/07)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$22.50  
Supplemental Benefit Rate per Hour: \$18.06  
Overtime Supplemental Rate Per Hour: \$19.47

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$23.00  
Supplemental Benefit Rate per Hour: \$18.56  
Overtime Supplemental Rate Per Hour: \$20.00

**Electrician (Fifth Term: 13-18 Months - Hired on or after 5/10/07)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$27.00  
Supplemental Benefit Rate per Hour: \$20.32  
Overtime Supplemental Rate Per Hour: \$22.01

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$27.50  
Supplemental Benefit Rate per Hour: \$20.82  
Overtime Supplemental Rate Per Hour: \$22.54

**Electrician (Fifth Term: 0-18 Months - Hired before 5/10/07)**

Effective Period: 7/1/2014 - 5/12/2015  
Wage Rate per Hour: \$26.30  
Supplemental Benefit Rate per Hour: \$19.96  
Overtime Supplemental Rate Per Hour: \$21.61

Effective Period: 5/13/2015 - 6/30/2015  
Wage Rate per Hour: \$26.80  
Supplemental Benefit Rate per Hour: \$20.46  
Overtime Supplemental Rate Per Hour: \$22.14

**Overtime Description**

Overtime Wage paid at time and one half the regular rate  
For "A" rated Apprentices (work in excess of 7 hours per day)  
For "M" rated Apprentices (work in excess of 8 hours per day)

(Local #3)

---

---

**ELEVATOR CONSTRUCTOR  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)**

**Elevator (Constructor) - First Year**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Rate Per Hour: \$25.46

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Rate Per Hour: \$26.94

**Elevator (Constructor) - Second Year**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 55% of Journeyman's rate  
Supplemental Rate Per Hour: \$25.86

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 55% of Journeyman's rate  
Supplemental Rate Per Hour: \$27.35

**Elevator (Constructor) - Third Year**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Rate Per Hour: \$26.66

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Rate Per Hour: \$28.17

**Elevator (Constructor) - Fourth Year**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 75% of Journeyman's rate  
Supplemental Rate Per Hour: \$27.46

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyman's rate  
Supplemental Rate Per Hour: \$29.00

(Local #1)

---

---

**ELEVATOR REPAIR & MAINTENANCE  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)**

**Elevator Service/Modernization Mechanic (First Year)**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Benefit Per Hour: \$24.85

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Benefit Per Hour: \$26.87

**Elevator Service/Modernization Mechanic (Second Year)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 55% of Journeyman's rate  
Supplemental Benefit Per Hour: \$25.24

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 55% of Journeyman's rate  
Supplemental Benefit Per Hour: \$27.27

**Elevator Service/Modernization Mechanic (Third Year)**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Benefit Per Hour: \$26.02

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Benefit Per Hour: \$28.08

**Elevator Service/Modernization Mechanic (Fourth Year)**

Effective Period: 7/1/2014 - 3/16/2015  
Wage Rate Per Hour: 75% of Journeyman's rate  
Supplemental Benefit Per Hour: \$26.81

Effective Period: 3/17/2015 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyman's rate  
Supplemental Benefit Per Hour: \$28.89

(Local #1)

---

---

**ENGINEER**  
**(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)**

**Engineer - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$22.49  
Supplemental Benefit Rate per Hour: \$20.68

**Engineer - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$28.11  
Supplemental Benefit Rate per Hour: \$20.68

**Engineer - Third Year**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$20.92**  
Supplemental Benefit Rate per Hour: **\$20.68**

**Engineer - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$33.73**  
Supplemental Benefit Rate per Hour: **\$20.68**

(Local #15)

---

---

**ENGINEER - OPERATING**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

**Operating Engineer - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour 40% of Journeyman's Rate  
Supplemental Benefit Per Hour: **\$18.60**

**Operating Engineer - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's Rate  
Supplemental Benefit Per Hour: **\$18.60**

**Operating Engineer - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyman's Rate  
Supplemental Benefit Per Hour: **\$18.60**

(Local #14)

---

---

**FLOOR COVERER**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

**Floor Coverer (First Year)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyman's rate  
Supplemental Rate Per Hour: \$30.25

**Floor Coverer (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Rate Per Hour: \$30.25

**Floor Coverer (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyman's rate  
Supplemental Rate Per Hour: \$30.25

**Floor Coverer (Fourth Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Rate Per Hour: \$30.25

(Carpenters District Council)

---

**GLAZIER**  
**(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)**

**Glazier (First Year)**

Effective Period: 7/1/2014 - 10/31/2014  
Wage Rate Per Hour: 40% of Journeyman's rate  
Supplemental Rate Per Hour: \$12.97

Effective Period: 11/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyman's rate  
Supplemental Rate Per Hour: \$13.12

**Glazier (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Rate Per Hour: \$22.25

**Glazier (Third Year)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 10/31/2014  
Wage Rate Per Hour: 60% of Journeyman's rate  
Supplemental Rate Per Hour: \$24.75

Effective Period: 11/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyman's rate  
Supplemental Rate Per Hour: \$25.10

**Glazier (Fourth Year)**

Effective Period: 7/1/2014 - 10/31/2014  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Rate Per Hour: \$29.87

Effective Period: 11/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Rate Per Hour: \$30.02

(Local #1281)

---

---

**HEAT & FROST INSULATOR  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)**

**Heat & Frost Insulator (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

**Heat & Frost Insulator (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

**Heat & Frost Insulator (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 70% of Journeyman's rate

**Heat & Frost Insulator (Fourth Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #12)

**HOUSE WRECKER  
(TOTAL DEMOLITION)  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)**

**House Wrecker - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$20.52  
Supplemental Benefit Rate per Hour: \$16.60

**House Wrecker - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$21.67  
Supplemental Benefit Rate per Hour: \$16.60

**House Wrecker - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$23.27  
Supplemental Benefit Rate per Hour: \$16.60

**House Wrecker - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$25.83  
Supplemental Benefit Rate per Hour: \$16.60

(Mason Tenders District Council)

---

---

**IRON WORKER - ORNAMENTAL  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)**

**Iron Worker (Ornamental) - 1st Ten Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyman's rate  
Supplemental Rate Per Hour: \$35.15

**Iron Worker (Ornamental) - 11 -16 Months**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 55% of Journeyperson's rate  
Supplemental Rate Per Hour: \$36.21

**Iron Worker (Ornamental) - 17 - 22 Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyperson's rate  
Supplemental Rate Per Hour: \$37.27

**Iron Worker (Ornamental) - 23 - 28 Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 70% of Journeyperson's rate  
Supplemental Rate Per Hour: \$39.40

**Iron Worker (Ornamental) - 29 - 36 Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Rate Per Hour: \$41.52

(Local #580)

---

**IRON WORKER - STRUCTURAL**  
**(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)**

**Iron Worker (Structural) - 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$24.98  
Supplemental Benefit Rate per Hour: \$45.53

**Iron Worker (Structural) - 7- 18 Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$25.58  
Supplemental Benefit Rate per Hour: \$45.53

**Iron Worker (Structural) - 19 - 36 months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$26.18  
Supplemental Benefit Rate per Hour: \$45.53

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #40 and #361)

---

---

**LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE LAYER & COMMON)**

(Ratio Apprentice to Journeyperson: 1 to 1, 1 to 3)

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - First 1000 hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Rate Per Hour: \$34.88

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Second 1000 hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyperson's rate  
Supplemental Rate Per Hour: \$34.88

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Third 1000 hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyperson's rate  
Supplemental Rate Per Hour: \$34.88

**Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Fourth 1000 hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 90% of Journeyperson's rate  
Supplemental Rate Per Hour: \$34.88

(Local #731)

---

---

**MARBLE MECHANICS**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

**Cutters & Setters - First 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

**Cutters & Setters - Second 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

**Cutters & Setters - Third 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

**Cutters & Setters - Fourth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 75% of Journeyman's rate

**Cutters & Setters - Fifth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 85% of Journeyman's rate

**Cutters & Setters - Sixth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 95% of Journeyman's rate

**Polishers & Finishers - First 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

**Polishers & Finishers - Second 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

**Polishers & Finishers - Third 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 75% of Journeyman's rate

**Polishers & Finishers - Fourth 750 Hours**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 90% of Journeyman's rate

(Local #7)

---

---

**MASON TENDER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Mason Tender - First Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$20.99

Supplemental Benefit Rate per Hour: \$17.86

**Mason Tender - Second Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$22.14

Supplemental Benefit Rate per Hour: \$17.86

**Mason Tender - Third Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$23.84

Supplemental Benefit Rate per Hour: \$17.86

**Mason Tender - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$26.50

Supplemental Benefit Rate per Hour: \$17.86

(Local #79)

---

---

**METALLIC LATHER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Metallic Lather (First Year -Called Prior to 6/29/11)**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$28.11**  
Supplemental Benefit Rate per Hour: **\$22.79**

**Metallic Lather (Second Year - Called Prior to 6/29/11)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$32.71**  
Supplemental Benefit Rate per Hour: **\$24.44**

**Metallic Lather (Third Year - Called Prior to 6/29/11)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$37.77**  
Supplemental Benefit Rate per Hour: **\$25.59**

**Metallic Lather (First Year -Called On Or After 6/29/11)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$17.71**  
Supplemental Benefit Rate per Hour: **\$19.85**

**Metallic Lather (Second Year - Called On Or After 6/29/11)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$22.81**  
Supplemental Benefit Rate per Hour: **\$19.85**

**Metallic Lather (Third Year - Called On Or After 6/29/11)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$27.91**  
Supplemental Benefit Rate per Hour: **\$19.85**

(Local #46)

---

---

**MILLWRIGHT**  
**(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)**

**Millwright (First Year)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$26.64**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$32.84

**Millwright (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$31.49

Supplemental Benefit Rate per Hour: \$36.18

**Millwright (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$36.33

Supplemental Benefit Rate per Hour: \$40.66

**Millwright (Fourth Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$46.02

Supplemental Benefit Rate per Hour: \$46.24

(Local #740)

---

---

**PAVER AND ROADBUILDER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Paver and Roadbuilder - First Year (Minimum 1000 hours)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$26.61

Supplemental Benefit Rate per Hour: \$16.50

**Paver and Roadbuilder - Second Year (Minimum 1000 hours)**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$28.22

Supplemental Benefit Rate per Hour: \$16.50

(Local #1010)

---

---

**PAINTER**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

**Painter - Brush & Roller - First Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$15.80

Supplemental Benefit Rate per Hour: \$11.88

**Painter - Brush & Roller - Second Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$19.75

Supplemental Benefit Rate per Hour: \$15.73

**Painter - Brush & Roller - Third Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$23.70

Supplemental Benefit Rate per Hour: \$18.64

**Painter - Brush & Roller - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$31.60

Supplemental Benefit Rate per Hour: \$24.02

(District Council of Painters)

---

---

**PAINTER - STRUCTURAL STEEL**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

**Painters - Structural Steel (First Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 40% of Journeyperson's rate

**Painters - Structural Steel (Second Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

**Painters - Structural Steel (Third Year)**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #806)

---

---

**PLASTERER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Plasterer - First Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 40% of Journeyman's rate

Supplemental Rate Per Hour: \$15.76

**Plasterer - First Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 45% of Journeyman's rate

Supplemental Rate Per Hour: \$16.24

**Plasterer - Second Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 55% of Journeyman's rate

Supplemental Rate Per Hour: \$18.21

**Plasterer - Second Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 60% of Journeyman's rate

Supplemental Rate Per Hour: \$19.29

**Plasterer - Third Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 70% of Journeyman's rate

Supplemental Rate Per Hour: \$21.46

**Plasterer - Third Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 75% of Journeyman's rate

Supplemental Rate Per Hour: \$22.54

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #530)

---

**PLUMBER**  
**(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)**

**Plumber - First Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$14.00**  
Supplemental Benefit Rate per Hour: **\$0.71**

**Plumber - First Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$14.00**  
Supplemental Benefit Rate per Hour: **\$2.96**

**Plumber - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$23.87**  
Supplemental Benefit Rate per Hour: **\$11.46**

**Plumber - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$25.97**  
Supplemental Benefit Rate per Hour: **\$11.46**

**Plumber - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$28.82**  
Supplemental Benefit Rate per Hour: **\$11.46**

**Plumber - Fifth Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$30.22**  
Supplemental Benefit Rate per Hour: **\$11.46**

**Plumber - Fifth Year: 2nd Six Months**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$42.29

Supplemental Benefit Rate per Hour: \$11.46

(Plumbers Local #1)

---

---

**POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING  
RENOVATION)**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

**Pointer - Waterproofer, Caulker Mechanic - First Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$25.01

Supplemental Benefit Rate per Hour: \$4.75

**Pointer - Waterproofer, Caulker Mechanic - Second Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$27.25

Supplemental Benefit Rate per Hour: \$9.70

**Pointer - Waterproofer, Caulker Mechanic - Third Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$32.24

Supplemental Benefit Rate per Hour: \$12.45

**Pointer - Waterproofer, Caulker Mechanic - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$38.66

Supplemental Benefit Rate per Hour: \$12.45

(Bricklayer District Council)

---

---

**ROOFER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

**Rofer - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 35% of Journeyman's Rate

**Rofer - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 50% of Journeyman's Rate

**Rofer - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 60% of Journeyman's Rate

**Rofer - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 75% of Journeyman's Rate

(Local #8)

---

---

**SHEET METAL WORKER  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)**

**Sheet Metal Worker (0-6 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 25% of Journeyman's rate  
Supplemental Rate Per Hour: \$6.15

**Sheet Metal Worker (7-18 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 35% of Journeyman's rate  
Supplemental Rate Per Hour: \$16.21

**Sheet Metal Worker (19-30 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 45% of Journeyman's rate  
Supplemental Rate Per Hour: \$22.23

**Sheet Metal Worker (31-36 Months)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 55% of Journeyman's rate  
Supplemental Rate Per Hour: \$26.16

**Sheet Metal Worker (37-42 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyman's rate  
Supplemental Rate Per Hour: \$28.13

**Sheet Metal Worker (43-48 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 70% of Journeyman's rate  
Supplemental Rate Per Hour: \$32.09

**Sheet Metal Worker (49-54 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyman's rate  
Supplemental Rate Per Hour: \$34.07

**Sheet Metal Worker (55-60 Months)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyman's rate  
Supplemental Rate Per Hour: \$36.03

(Local #28)

---

**SIGN ERECTOR**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

**Sign Erector - First Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 35% of Journeyman's rate  
Supplemental Rate Per Hour: \$5.96

**Sign Erector - First Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyman's rate  
Supplemental Rate Per Hour: \$6.75

**Sign Erector - Second Year: 1st Six Months**



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 45% of Journeyperson's rate  
Supplemental Rate Per Hour: \$7.55

**Sign Erector - Second Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Rate Per Hour: \$8.34

**Sign Erector - Third Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 55% of Journeyperson's rate  
Supplemental Rate Per Hour: \$9.13

**Sign Erector - Third Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 60% of Journeyperson's rate  
Supplemental Rate Per Hour: \$9.92

**Sign Erector - Fourth Year: 1st Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyperson's rate  
Supplemental Rate Per Hour: \$10.72

**Sign Erector - Fourth Year: 2nd Six Months**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 70% of Journeyperson's rate  
Supplemental Rate Per Hour: \$11.51

**Sign Erector - Fifth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 75% of Journeyperson's rate  
Supplemental Rate Per Hour: \$12.30

**Sign Erector - Sixth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Rate Per Hour: \$12.30

(Local #137)

**STEAMFITTER**

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

**Steamfitter - First Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate and Supplemental Per Hour: 40% of Journeyman's rate

**Steamfitter - Second Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate and Supplemental Rate Per Hour: 50% of Journeyman's rate.

**Steamfitter - Third Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate and Supplemental Rate per Hour: 65% of Journeyman's rate.

**Steamfitter - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate and Supplemental Rate Per Hour: 80% of Journeyman's rate.

**Steamfitter - Fifth Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate and Supplemental Rate Per Hour: 85% of Journeyman's rate.

(Local #638)

---

---

**STONE MASON - SETTER**

(Ratio Apprentice of Journeyman: 1 to 1, 1 to 2)

**Stone Mason - Setters - First 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

**Stone Mason - Setters - Second 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 60% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Rate Per Hour: 50% of Journeyperson's rate

**Stone Mason - Setters - Third 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 70% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

**Stone Mason - Setters - Fourth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 80% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

**Stone Mason - Setters - Fifth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 90% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

**Stone Mason - Setters - Sixth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate Per Hour: 100% of Journeyperson's rate

Supplemental Rate Per Hour: 50% of Journeyperson's rate

(Bricklayers District Council)

---

**TAPER**

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

**Drywall Taper - First Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 40% of Journeyperson's rate

**Drywall Taper - Second Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

**Drywall Taper - Third Year**

Effective Period: 7/1/2014 - 6/30/2015

Wage and Supplemental Rate Per Hour: 80% of Journeyperson's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #1974)

---

---

**TILE LAYER - SETTER**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

**Tile Layer - Setter - First 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

**Tile Layer - Setter - Second 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

**Tile Layer - Setter - Third 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

**Tile Layer - Setter - Fourth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 75% of Journeyman's rate

**Tile Layer - Setter - Fifth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 85% of Journeyman's rate

**Tile Layer - Setter - Sixth 750 Hours**

Effective Period: 7/1/2014 - 6/30/2015  
Wage and Supplemental Rate Per Hour: 95% of Journeyman's rate

(Local #7)

---

---

**TIMBERPERSON**  
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 6)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

**Timberperson - First Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 40% of Journeyperson's rate  
Supplemental Rate Per Hour: \$30.89

**Timberperson - Second Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 50% of Journeyperson's rate  
Supplemental Rate Per Hour: \$30.89

**Timberperson - Third Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 65% of Journeyperson's rate  
Supplemental Rate Per Hour: \$30.89

**Timberperson - Fourth Year**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate Per Hour: 80% of Journeyperson's rate  
Supplemental Rate Per Hour: \$30.89

(Local #1536)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

LABOR LAW §230 AND  
NYC ADMINISTRATIVE CODE §6-130 BUILDING SERVICE EMPLOYEES

---

**PREVAILING WAGE FOR BUILDING SERVICE EMPLOYEES ON NYC CONTRACTS PURSUANT  
TO LABOR LAW §230 ET SEQ.**

Building service employees on public contracts must receive not less than the prevailing rate of wage and supplements for the classification of work performed. In accordance with Labor Law §230 et seq. the Comptroller of the City of New York has promulgated this schedule of prevailing wages and supplemental benefits for building service employees engaged on New York City public building service contracts in excess of \$1,500.00. Prevailing rates are required to be annexed to and form part of the contract pursuant to §231 (4).

This schedule is a compilation of separate determinations of the prevailing rate of wage and supplements made by the Comptroller for each trade classification listed herein pursuant to New York State Labor Law section 234 (1). The source of the wage and supplement rates, whether a collective bargaining agreement, survey data or other, is listed at the end of each classification.

Agency Chief Contracting Officers should contact the Bureau of Labor Law's Classification Unit with any questions concerning trade classifications, prevailing rates or prevailing practices with respect to procurement on New York City building services contracts. Contractors are advised to review the Comptroller's Prevailing Wage Schedule before bidding on building services contracts. Contractors with questions concerning trade classifications, prevailing rates or prevailing practices with respect to building services contracts in the procurement stage must contact the contracting agency responsible for the procurement.

Any error as to compensation under the prevailing wage law or other information as to trade classification, made by the contracting agency in the contract documents or in any other communication, will not preclude a finding against the contractor of prevailing wage violation.

Any questions concerning trade classifications, prevailing rates or prevailing practices on New York City building services contracts that have already been awarded may be directed to the Bureau of Labor Law's Classification Unit by calling (212) 669-7974. All callers must have the agency name and contract registration number available when calling with questions on building services contracts. Please direct all other compliance issues to: Bureau of Labor Law, Attn: Wasyl Kinach, P.E., Office of the Comptroller, 1 Centre Street, Room 1122, New York, N.Y. 10007; Fax (212) 669-4002.

---

**PREVAILING WAGE FOR BUILDING SERVICE EMPLOYEES IN NEW YORK CITY LEASED OR  
FINANCIALLY ASSISTED FACILITIES PURSUANT TO NYC ADMINISTRATIVE CODE § 6-130**

Covered landlords & covered financial assistance recipients shall ensure that all building service employees performing building service work at the premises to which a lease or financial assistance pertains are paid no less than the prevailing wage listed in the Labor Law §230 Prevailing Wage Schedule.

**Covered Landlords include:**

Businesses (other than not-for-profit organizations) leasing to New York City agencies

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

commercial office space or commercial office facilities of 10,000 square feet or more where the City leases or rents no less than 51% of the total square footage of the building to which the lease applies (no less than 80% in Staten Island or in an area not defined as an exclusion area pursuant to section 421-a of the real property tax law on the date of enactment of the local law).

Covered Financial Assistance Recipients include:

Businesses (other than not-for-profit organizations) with annual gross revenues of five million dollars or more who have received financial assistance from the City of New York (as defined in New York City Administrative Code §6-130) with a total value of one million dollars or more.

Exemptions: Business Improvement Districts and employers with manufacturing operations at the premises to which the financial assistance pertains.

The information is intended to assist you in meeting your prevailing wage obligation. You should consult New York City Administrative Code §6-130 to determine whether you are covered by this prevailing wage law. New York City Administrative Code § 6-130 requires the City to maintain an updated list of covered landlords and financial assistance recipients who are subject to the prevailing wage requirement.

---

Labor Law § 231 (6) and NYC Administrative Law §6-130 requires contractors to post on the site of the work a current copy of this schedule of wages and supplements.

This schedule is applicable to work performed during the effective period, unless otherwise noted. Changes to this schedule are published on our web site [www.comptroller.nyc.gov](http://www.comptroller.nyc.gov). Contractors must pay the wages and supplements in effect when the building service employee performs the work. Preliminary schedules for future one-year periods appear in the City Record on or about June 1 each succeeding year. Final schedules appear on or about July 1 in the City Record and on our web site [www.comptroller.nyc.gov](http://www.comptroller.nyc.gov).

Contractors are solely responsible for maintaining original payroll records delineating, among other things, the hours worked by each employee within a given classification.

Some of the rates in this schedule are based on collective bargaining agreements. The Comptroller's Office has attempted to include all overtime, shift and night differential, Holiday, Saturday, Sunday or other premium time work. However, this schedule does not set forth every prevailing practice with respect to such rates with which employers must comply. All such practices are nevertheless part of the employer's prevailing wage obligation and contained in the collective bargaining agreements of the prevailing wage unions. These collective bargaining agreements are available for inspection by appointment. Requests for appointments may be made by calling (212) 669-4443, Monday through Friday between the hours of 9 a.m. and 5 p.m.

In order to meet their obligation to provide prevailing supplemental benefits to each covered employee, employers must either:

- 1) Provide bona-fide benefits which cost the employer no less than the prevailing supplemental benefits rate; or
- 2) Supplement the employee's hourly wage by an amount no less than the prevailing supplemental benefits rate; or
- 3) Provide a combination of bona-fide benefits and wage supplements which cost the employer no less than the prevailing supplemental benefits rate in total.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Particular attention should be given to the supplemental benefits requirement. Although in most instances the payment or provision for supplemental benefits is for each hour worked, some classifications require the payment or provision of supplemental benefits for each hour paid. Consequently, some prevailing practices require benefits to be purchased at the overtime, shift differential, Holiday, Saturday, Sunday or other premium time rate.

Benefits are paid for **EACH HOUR WORKED** unless otherwise noted.



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE



THE CITY OF NEW YORK  
OFFICE OF THE COMPTROLLER  
BUREAU OF LABOR LAW  
1 CENTRE STREET  
NEW YORK, NY 10007

SCOTT M. STRINGER  
COMPTROLLER

If you are a Covered Building Service Employee and you have been paid less than the Prevailing Wage and Benefits, please contact us at 212-669-4443 or download our complaint form from our website at [WWW.COMPTROLLER.NYC.GOV](http://WWW.COMPTROLLER.NYC.GOV) (click on the Bureau of Labor Law).

Si es un empleado de servicios a edificios elegible y recibió menos del sueldo prevalente y beneficios, por favor contáctenos en 212-669-4443 o descarga un formulario de reclamo del sitio del Internet [WWW.COMPTROLLER.NYC.GOV](http://WWW.COMPTROLLER.NYC.GOV) (oprime "Oficina de Derecho Laboral").

Wasył Kinach, P.E.  
Director of Classifications  
Bureau of Labor Law

**TABLE OF CONTENTS**

<b><u>CLASSIFICATION</u></b>	<b><u>PAGE</u></b>
BOILER SERVICEPERSON/TANK CLEANER MECHANIC (LOW PRESSURE).....	6
BUILDING CLEANER AND MAINTAINER (OFFICE).....	6
BUILDING CLEANER AND MAINTAINER (RESIDENTIAL).....	11
BUILDING HVAC SERVICES OPERATOR.....	12
CLEANER (PARKING GARAGE).....	13
FUEL OIL.....	13
GARDENER.....	15
LOCKSMITH.....	16
MEDICAL WASTE REMOVAL.....	16
MOVER - OFFICE FURNITURE AND EQUIPMENT.....	17
REFUSE REMOVER.....	18
SECURITY GUARD (ARMED).....	18
SECURITY GUARD (UNARMED).....	20
WINDOW CLEANER.....	22

## BOILER SERVICEPERSON/TANK CLEANER MECHANIC (LOW PRESSURE)

### Boiler Service Person/Tank Cleaner Mechanic (Low Pressure)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$11.00

Supplemental Benefit Rate per Hour: \$7.15

### Overtime Description

Work in excess of 8 hours performed on a Sunday or Holiday shall be paid two and one half times the regular rate.

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

### Paid Holidays

New Year's Day

Martin Luther King Jr. Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Employee's Birthday

### Vacation

1 year service.....five (5) days

3 years service or more.....ten (10) days

8 years service or more.....fifteen (15) days

13 years service or more.....twenty (20) days

### SICK LEAVE:

1-2 years employment.....4 days

2-3 years employment.....5 days

3-4 years employment.....6 days

4-5 years employment.....8 days

6 years or more employment.....10 days

(Local #32 B/J)

---

## BUILDING CLEANER AND MAINTAINER (OFFICE)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

**Office Building Class "A" Handyperson (Over 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$25.65**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$26.20**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "A" Foreperson, Starter (Over 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$25.54**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$26.09**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "A" Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director (Over 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$23.42**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.22; for new employee 13-24 months of employment - \$9.58

NEW HIRE: Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate. Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$23.92**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.67; for new employee 13-24 months of employment - \$10.13

NEW HIRE: Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

**Office Building Class "B" Handyperson (Over 120,000 and less than 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: \$25.62

Supplemental Benefit Rate per Hour: \$9.91

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: \$26.17

Supplemental Benefit Rate per Hour: \$10.46

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "B" Foreperson, Starter (Over 120,000 and less than 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: \$25.50

Supplemental Benefit Rate per Hour: \$9.91

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: \$26.05

Supplemental Benefit Rate per Hour: \$10.46

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "B" Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director (Over 120,000 and less than 280,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: \$23.39

Supplemental Benefit Rate per Hour: \$9.91

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.22; for new employee 13-24 months of employment - \$9.58

NEW HIRE: Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate. Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: \$23.89

Supplemental Benefit Rate per Hour: \$10.46

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.67; for new employee 13-24 months of employment - \$10.13

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

**NEW HIRE:** Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate. Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

**Office Building Class "C" Handyperson (Less than 120,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$25.57**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$26.12**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "C" Foreperson, Starter (Less than 120,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$25.46**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$26.01**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

**Office Building Class "C" Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director (Less than 120,000 square feet gross area)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$23.35**

Supplemental Benefit Rate per Hour: **\$9.91**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.22; for new employee 13-24 months of employment - \$9.58

**NEW HIRE:** Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate. Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

Effective Period: 1/1/2015 - 6/30/2015

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$23.85**

Supplemental Benefit Rate per Hour: **\$10.46**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.67; for new employee 13-24 months of employment - \$10.13

**NEW HIRE:** Cleaner/Porter, Elevator Operator, Exterminator, Fire Safety Director may be paid 75% of the wage rate above for the first 21 months of employment, 85% of the wage rate above for the 22nd through 42nd months of employment, and upon the completion of 42 months of employment employee shall be paid the full wage rate. Note: New Hires hired before January 1, 2012 will continue to receive 80% of the wage rate above for the first 30 months, and upon the completion of 30 months of employment employee shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.

Months of employment shall be defined as an Employee's length of service with the Employer or at the Facility, whichever is greater.

### Overtime Description

Supplemental Benefits shall be paid for each hour paid, up to forty (40) paid hours per week.

### Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for work on a holiday plus the day's pay.

Time and one half the regular hourly rate after 40 hours in any work week.

### Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

### Vacation

Less than 6 months of work.....no vacation

6 months of work.....three (3) days

1 year of work.....ten (10) days

5 years of work.....fifteen (15) days

15 years of work.....twenty (20) days

21 years of work.....twenty-one (21) days

22 years of work.....twenty-two (22) days

23 years of work.....twenty-three (23) days

24 years of work.....twenty-four (24) days

25 years or more of work.....twenty-five (25) days

Plus two Personal Days per year.

Sick Leave:

10 sick days per year.

Unused sick leave paid in the succeeding January, one full day pay for each unused sick day.

(Local #32 B/J)

## **BUILDING CLEANER AND MAINTAINER (RESIDENTIAL)**

### **Residential Building Handyperson**

Effective Period: 7/1/2014 - 4/20/2015

Wage Rate per Hour: **\$24.26**

Supplemental Benefit Rate per Hour: **\$9.83**

Supplemental Note: for new employee 0-3 months of employment - \$0.00. Effective 1/1/2015 - \$10.38

Effective Period: 4/21/2015 - 6/30/2015

Wage Rate per Hour: **\$24.83**

Supplemental Benefit Rate per Hour: **\$10.38**

Supplemental Note: for new employee 0-3 months of employment - \$0.00

### **Residential Building Cleaner/Porter, Doorman, Elevator Operator**

Effective Period: 7/1/2014 - 4/20/2015

Wage Rate per Hour: **\$21.98**

Supplemental Benefit Rate per Hour: **\$9.83**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.22; for new employee 13-24 months of employment - \$9.58

Effective 1/1/2015 - \$10.38, for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.67; for new employee 13-24 months of employment - \$10.13

**NEW HIRE - Cleaner/Porter, Doorman, Elevator Operator: may be paid a starting rate of 80% of the hourly rate published above. Upon completion of 30 months of employment, the new hire shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.**

Effective Period: 4/21/2015 - 6/30/2015

Wage Rate per Hour: **\$22.51**

Supplemental Benefit Rate per Hour: **\$10.38**

Supplemental Note: for new employee 0-3 months of employment - \$0.00; for new employee 4-12 months of employment - \$7.67; for new employee 13-24 months of employment - \$10.13

**NEW HIRE - Cleaner/Porter, Doorman, Elevator Operator: 0-21 months may be paid 75% of the hourly wage rate published above, 22-42 months may be paid 85% of the hourly wage rate published above. Upon completion of 42 months of employment, the new hire shall be paid the full wage rate. Upon completion of two years of employment the new hire receives the full supplemental benefit rate.**

### **Overtime Description**

Supplemental Benefits shall be paid for each hour paid, up to forty (40) paid hours per week.

### **Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for work on a holiday plus the day's pay.

Time and one half the regular hourly rate after 40 hours in any work week.

### **Paid Holidays**

New Year's Day



OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Martin Luther King Jr. Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Election Day  
Thanksgiving Day  
Christmas Day

**Vacation**

6 months.....three (3) days  
1 year.....ten (10) days  
5 years.....fifteen (15) days  
15 years.....twenty (20) days  
21 years.....twenty-one (21) days  
22 years.....twenty-two (22) days  
23 years.....twenty-three (23) days  
24 years.....twenty-four (24) days  
25 years.....twenty-five (25) days  
Plus two Personal Days per year.

**SICK LEAVE**

After 1 year of service.....ten (10) days per year

(Local #32 B/J)

---

---

**BUILDING HVAC SERVICES OPERATOR**

**Engineer (Refrigeration)**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$36.73**  
Supplemental Benefit Rate per Hour: **\$16.35**

**Fireperson**

Fireperson (Helper): Assist the Engineer

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: **\$28.60**  
Supplemental Benefit Rate per Hour: **\$15.97**

Please note that the NYC Comptroller's Office does not publish rates for the Stationary Engineer title.

**Overtime Description**

All hours worked on a holiday shall be paid at two and one half times the regular wage rate in lieu of the paid day off.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Time and one half the regular rate for Sunday.

**Paid Holidays**

New Year's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day  
Plus six (6) floating Holidays

**Vacation**

6 months .....	three (3) days
1 year .....	ten (10) days
5 years .....	fifteen (15) days
15 years .....	twenty (20) days
21 years.....	twenty-one (21) days
22 years .....	twenty-two (22) days
23 years .....	twenty-three (23) days
24 years .....	twenty-four (24) days
25 years .....	twenty-five (25) days

(Local #94)

---

---

**CLEANER (PARKING GARAGE)**

**Garage Cleaner**

Effective Period: 7/1/2014 - 6/30/2015  
Wage Rate per Hour: \$10.76  
Supplemental Benefit Rate per Hour: \$1.63

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular hourly rate after 40 hours in any work week.

(Based on data from NYS Department of Labor Occupational Employment Statistics and US Department of Labor Bureau of Labor Statistics)

---

---

**FUEL OIL**

**Fuel Oil, Coal, Fuel Gas, Petroleum Product Chauffeur (5th Year and above)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 12/15/2014  
Wage Rate per Hour: **\$31.36**  
Supplemental Benefit Rate per Hour: **\$20.77**

Effective Period: 12/16/2014 - 6/30/2015  
Wage Rate per Hour: **\$31.86**  
Supplemental Benefit Rate per Hour: **\$21.27**

**Fuel Oil, Coal, Fuel Gas, Petroleum Product Chauffeur (4th Year)**

Effective Period: 7/1/2014 - 12/15/2014  
Wage Rate per Hour: **\$28.75**  
Supplemental Benefit Rate per Hour: **\$20.77**

Effective Period: 12/16/2014 - 6/30/2015  
Wage Rate per Hour: **\$29.25**  
Supplemental Benefit Rate per Hour: **\$21.27**

**Fuel Oil, Coal, Fuel Gas, Petroleum Product Chauffeur (3rd Year)**

Effective Period: 7/1/2014 - 12/15/2014  
Wage Rate per Hour: **\$26.75**  
Supplemental Benefit Rate per Hour: **\$20.77**

Effective Period: 12/16/2014 - 6/30/2015  
Wage Rate per Hour: **\$27.25**  
Supplemental Benefit Rate per Hour: **\$21.27**

**Fuel Oil, Coal, Fuel Gas, Petroleum Product Chauffeur (2nd Year)**

Effective Period: 7/1/2014 - 12/15/2014  
Wage Rate per Hour: **\$24.75**  
Supplemental Benefit Rate per Hour: **\$20.77**

Effective Period: 12/16/2014 - 6/30/2015  
Wage Rate per Hour: **\$25.25**  
Supplemental Benefit Rate per Hour: **\$21.27**

**Fuel Oil, Coal, Fuel Gas, Petroleum Product Chauffeur (1st Year)**

Effective Period: 7/1/2014 - 12/15/2014  
Wage Rate per Hour: **\$22.75**  
Supplemental Benefit Rate per Hour: **\$20.77**

Effective Period: 12/16/2014 - 6/30/2015  
Wage Rate per Hour: **\$23.25**  
Supplemental Benefit Rate per Hour: **\$21.27**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.

**Overtime Holidays**

Double time the regular rate for work on the following holiday(s).

- Martin Luther King Jr. Day
- Lincoln's Birthday
- Washington's Birthday
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Election Day
- Veteran's Day

Triple time the regular rate for work on the following holiday(s).

- New Year's Day
- Thanksgiving Day
- Christmas Day

**Paid Holidays**

- New Year's Day
- Martin Luther King Jr. Day
- Lincoln's Birthday
- Washington's Birthday
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Election Day
- Veteran's Day
- Thanksgiving Day
- Christmas Day

**Vacation**

Less than 75 days worked.....no vacation.  
75 days worked, but less than 110 days worked in a calendar year.....five (5) days the following year.  
110 days or more worked in a calendar year.....ten (10) days the following year.

**SICK LEAVE:**

1 day sick leave earned for each 40 days worked in the preceding calendar year for a maximum of five (5) days per calendar year.

(Local #553)

---

---

**GARDENER**

Gardener

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$17.57

Supplemental Benefit Rate per Hour: \$1.63

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular hourly rate after 40 hours in any work week.

(Based on data from NYS Department of Labor Occupational Employment Statistics and US Department of Labor Bureau of Labor Statistics)

---

---

**LOCKSMITH**

**Locksmith**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: \$22.28

Supplemental Benefit Rate per Hour: \$6.13

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular hourly rate after 40 hours in any work week.

(Based on data from NYS Department of Labor Occupational Employment Statistics and US Department of Labor Bureau of Labor Statistics)

---

---

**MEDICAL WASTE REMOVAL**

**Driver**

Effective Period: 7/1/2014 - 3/31/2015

Wage Rate per Hour: \$18.76

Supplemental Benefit Rate per Hour: \$9.47

Effective Period: 4/1/2015 - 6/30/2015

Wage Rate per Hour: \$19.59

Supplemental Benefit Rate per Hour: \$10.34

**Helper**

Effective Period: 7/1/2014 - 3/31/2015

Wage Rate per Hour: \$15.01

Supplemental Benefit Rate per Hour: \$9.47

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
\$230 PREVAILING WAGE SCHEDULE

Effective Period: 4/1/2015 - 6/30/2015

Wage Rate per Hour: \$15.84

Supplemental Benefit Rate per Hour: \$10.34

**Tractor Trailer Driver**

Effective Period: 7/1/2014 - 3/31/2015

Wage Rate per Hour: \$21.26

Supplemental Benefit Rate per Hour: \$9.47

Effective Period: 4/1/2015 - 6/30/2015

Wage Rate per Hour: \$22.09

Supplemental Benefit Rate per Hour: \$10.34

**Overtime Description**

Time and one half the regular hourly rate after an 8 hour day or after 40 hours in any work week. The seventh day of work in a workweek is paid at double time the regular hourly rate. Time and one half the regular hourly rate for work on a holiday plus days pay for below paid holidays.

**Paid Holidays**

President's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day

**Vacation**

1 year of service but less than five years.....ten (10) days  
5 years of service but less than ten years.....fifteen (15) days  
10 years of service.....sixteen (16) days  
11 years.....seventeen (17) days  
12 years.....eighteen (18) days  
13 years.....nineteen (19) days  
14 years.....twenty (20) days  
20 years.....twenty-one (21) days  
21 years.....twenty-two (22) days  
22 years.....twenty-three (23) days  
23 years.....twenty-four (24) days  
24 years.....twenty-five (25) days  
Plus 5 Personal Days

(Local #813)

---

**MOVER - OFFICE FURNITURE AND EQUIPMENT**

**Heavy and Tractor Trailer Truck Driver**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Tractor-trailer combination or a truck with a capacity of at least 26,000 pounds Gross Vehicle Weight (GVW)

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$22.48**

Supplemental Benefit Rate per Hour: **\$5.13**

**Light Truck Driver**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$18.89**

Supplemental Benefit Rate per Hour: **\$5.13**

**Laborer and Freight, Stock, and Material Movers, Hand**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$17.59**

Supplemental Benefit Rate per Hour: **\$5.13**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular hourly rate after 40 hours in any work week.

(Based on data from NYS Department of Labor Occupational Employment Statistics and US Department of Labor Bureau of Labor Statistics)

---

**REFUSE REMOVER**

**Refuse Remover**

Effective Period: 7/1/2014 - 6/30/2015

Wage Rate per Hour: **\$29.54**

Supplemental Benefit Rate per Hour: **\$5.13**

**Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular hourly rate after 40 hours in any work week.

(Based on data from NYS Department of Labor Occupational Employment Statistics and US Department of Labor Bureau of Labor Statistics)

---

**SECURITY GUARD (ARMED)**

## Security Guard (Armed)

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$28.25**

Supplemental Benefit Rate per Hour: **\$5.02**

Supplemental Note: for new employee 0-30 days of employment - \$4.44; for new employee 31-120 days of employment - \$4.61; for new employee 121 days - 2 years of employment - \$4.63

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$28.50**

Supplemental Benefit Rate per Hour: **\$5.34**

Supplemental Note: for new employee 0-30 days of employment - \$4.62; for new employee 31-120 days of employment - \$4.79; for new employee 121 days - 2 years of employment - \$4.90

Months of employment shall be defined as an Employee's length of service with the Employer or at the Facility, whichever is greater.

## **Overtime Description**

A guard who works a holiday is paid the regular rate plus receives the paid holiday.

Supplemental Benefits shall be paid for each hour paid, up to forty (40) paid hours per week.

## **Overtime**

Time and one half the regular rate after an 8 hour day.

Time and one half the regular hourly rate after 40 hours in any work week.

## **Paid Holidays**

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Personal Day

## **Vacation**

Months on payroll	Vacation with Pay
6	3 days
12	5 days
24	10 days
60	15 days
180	20 days
300	25 days

## **Sick Leave**

Employees accrue paid sick leave at the rate of one (1) sick day for every six (6) months worked, up to a maximum of six (6) days a year.

(Local #32B/J)

---

---



## **SECURITY GUARD (UNARMED)**

### **Security Guard (Unarmed) 0 - 6 months**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$13.10**

Supplemental Benefit Rate per Hour: **\$4.63**

Supplemental Note: for new employee 0-30 days of employment - \$4.44; for new employee 31-120 days of employment - \$4.61

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$13.35**

Supplemental Benefit Rate per Hour: **\$4.90**

Supplemental Note: for new employee 0-30 days of employment - \$4.62; for new employee 31-120 days of employment - \$4.79

### **Security Guard (Unarmed) 7 - 12 months**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$13.60**

Supplemental Benefit Rate per Hour: **\$4.63**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$13.85**

Supplemental Benefit Rate per Hour: **\$4.90**

### **Security Guard (Unarmed) 13 - 18 months**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$14.10**

Supplemental Benefit Rate per Hour: **\$4.63**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$14.35**

Supplemental Benefit Rate per Hour: **\$4.90**

### **Security Guard (Unarmed) 19 - 24 months**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$14.60**

Supplemental Benefit Rate per Hour: **\$4.63**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$14.85**

Supplemental Benefit Rate per Hour: **\$4.90**

### **Security Guard (Unarmed) 25 - 30 months**

Effective Period: 7/1/2014 - 12/31/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$15.10**  
Supplemental Benefit Rate per Hour: **\$5.02**

Effective Period: 1/1/2015 - 6/30/2015  
Wage Rate per Hour: **\$15.35**  
Supplemental Benefit Rate per Hour: **\$5.34**

**Security Guard (Unarmed) 31 months or more**

Effective Period: 7/1/2014 - 12/31/2014  
Wage Rate per Hour: **\$15.60**  
Supplemental Benefit Rate per Hour: **\$5.02**

Effective Period: 1/1/2015 - 6/30/2015  
Wage Rate per Hour: **\$16.00**  
Supplemental Benefit Rate per Hour: **\$5.34**

Months of employment shall be defined as an Employee's length of service with the Employer or at the Facility, whichever is greater.

**Overtime Description**

A guard who works a holiday is paid the regular rate plus receives the paid holiday.  
Supplemental Benefits shall be paid for each hour paid, up to forty (40) paid hours per week.

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular hourly rate after 40 hours in any work week.

**Paid Holidays**

New Year's Day  
President's Day  
Memorial Day  
Independence Day  
Labor Day  
Thanksgiving Day  
Christmas Day  
Personal Day

**Vacation**

Months on payroll	Vacation with Pay
6	3 days
12	5 days
24	10 days
60	15 days
180	20 days
300	25 days

**Sick Leave**

Employees accrue paid sick leave at the rate of one (1) sick day for every six (6) months worked, up to a maximum of six (6) days a year.

(Local #32B/J)

## **WINDOW CLEANER**

### **Window Cleaner**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$26.90**

Supplemental Benefit Rate per Hour: **\$9.91**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$27.40**

Supplemental Benefit Rate per Hour: **\$10.46**

### **Power Operated Scaffolds, Manual Scaffolds, and Boatswain Chairs**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$29.27**

Supplemental Benefit Rate per Hour: **\$9.91**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$29.90**

Supplemental Benefit Rate per Hour: **\$10.46**

### **Window Cleaner Apprentice (0 - 3 months)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$19.92**

Supplemental Benefit Rate per Hour: None

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$20.29**

Supplemental Benefit Rate per Hour: None

### **Window Cleaner Apprentice (4 - 7 months)**

Effective Period: 7/1/2014 - 12/31/2014

Wage Rate per Hour: **\$21.54**

Supplemental Benefit Rate per Hour: **\$9.91**

Effective Period: 1/1/2015 - 6/30/2015

Wage Rate per Hour: **\$21.94**

Supplemental Benefit Rate per Hour: **\$10.46**

### **Window Cleaner Apprentice (8 - 11 months)**

Effective Period: 7/1/2014 - 12/31/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$22.82  
Supplemental Benefit Rate per Hour: \$9.91

Effective Period: 1/1/2015 - 6/30/2015  
Wage Rate per Hour: \$23.24  
Supplemental Benefit Rate per Hour: \$10.46

**Window Cleaner Apprentice (12 - 15 months)**

Effective Period: 7/1/2014 - 12/31/2014  
Wage Rate per Hour: \$24.12  
Supplemental Benefit Rate per Hour: \$9.91

Effective Period: 1/1/2015 - 6/30/2015  
Wage Rate per Hour: \$24.57  
Supplemental Benefit Rate per Hour: \$10.46

**Window Cleaner Apprentice (16 - 17 months)**

Effective Period: 7/1/2014 - 12/31/2014  
Wage Rate per Hour: \$25.44  
Supplemental Benefit Rate per Hour: \$9.91

Effective Period: 1/1/2015 - 6/30/2015  
Wage Rate per Hour: \$25.91  
Supplemental Benefit Rate per Hour: \$10.46

Months of employment shall be defined as an Employee's length of service with the Employer or at the Facility, whichever is greater.

**Overtime**

Time and one half the regular rate after an 8 hour day.  
Time and one half the regular rate for Saturday.  
Double time the regular rate for Sunday.  
Time and one half the regular rate for work on a holiday plus the day's pay.

**Paid Holidays**

New Year's Day  
Martin Luther King Jr. Day  
President's Day  
Good Friday  
Memorial Day  
Independence Day  
Labor Day  
Columbus Day  
Thanksgiving Day  
Day after Thanksgiving  
Christmas Day  
Personal Day

**Vacation**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK  
§230 PREVAILING WAGE SCHEDULE

After 7 months but less than 1 year of service.....	five (5) days
1 year but less than 5 years of service.....	ten (10) days
5 years of service but less than 15 years of service.....	fifteen (15) days
15 years of service but less than 21 years of service.....	twenty (20) days
21 years.....	twenty-one (21) days
22 years.....	twenty-two (22) days
23 years.....	twenty-three (23) days
24 years.....	twenty-four (24) days
25 years or more of service.....	twenty-five (25) days
Plus 1 day per year for medical visit	

**SICK LEAVE:**

10 days after one year worked. Unused sick days to be paid in cash.

(Local #32 B/J)

June 01, 2013



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

**DDC STANDARD GENERAL CONDITIONS  
FOR SINGLE CONTRACT PROJECTS**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

June 01, 2013

No Text

NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

**DIVISION 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
TABLE OF CONTENTS**

<b>SECTION NO.</b>	<b>SECTION TITLE</b>
01 10 00	SUMMARY
01 31 00	PROJECT MANAGEMENT AND COORDINATION
01 32 00	CONSTRUCTION PROGRESS DOCUMENTATION
01 32 33	PHOTOGRAPHIC DOCUMENTATION
01 33 00	SUBMITTAL PROCEDURES
01 35 03	GENERAL MECHANICAL REQUIREMENTS
01 35 06	GENERAL ELECTRICAL REQUIREMENTS
01 35 26	SAFETY REQUIREMENTS PROCEDURES
01 35 91	HISTORIC TREATMENT PROCEDURES
01 40 00	QUALITY REQUIREMENTS
01 42 00	REFERENCES
01 50 00	TEMPORARY FACILITIES, SERVICES AND CONTROLS
01 54 11	TEMPORARY ELEVATORS AND HOISTS
01 54 23	TEMPORARY SCAFFOLDING AND PLATFORMS
01 73 00	EXECUTION
01 74 19	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
01 77 00	CLOSEOUT PROCEDURES
01 78 39	CONTRACT RECORD DOCUMENTS
01 79 00	DEMONSTRATION AND OWNERS PRE-ACCEPTANCE ORIENTATION
01 81 13	SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
01 81 13.13	VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS
01 81 19	INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
01 91 13	GENERAL COMMISSIONING REQUIREMENTS





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

June 01, 2013

NO TEXT



**SECTION 01 10 00**  
**SUMMARY**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Addendum to the General Conditions: These General Conditions include and are supplemented by the Addendum to the General Conditions (the "Addendum"). The Addendum includes the following: (1) schedules referred to in these General Conditions (Schedule A through F), (2) information regarding the applicability of various articles, and (3) amended articles, if any.

**1.2 SUMMARY:**

- A. This section includes the following:
  - 1. Scope and Intent
  - 2. Provisions Referenced in the Contract
  - 3. Performance of Work During Non-Regular Work Hours (Pursuant to a Change Order)
  - 4. Interruption of Services at Existing Facilities

**1.3 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.4 SCOPE AND INTENT:**

- A. Description of Project: Refer to the Addendum for a description of the project.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 B**

- B. LEED: The City of New York will seek U.S. Green Building Council (USGBC) LEED (Leadership in Energy and Environmental Design) certification for this Project as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS" and the Addendum to the General Conditions.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 C**

- C. **COMMISSIONING:** The project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED procedures, as described in Section 01 91 13, **GENERAL COMMISSIONING REQUIREMENTS**, and the Addendum to the General Conditions. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.
- D. **PROGRESS SCHEDULE:** Refer to Section 01 32 00 **CONSTRUCTION PROGRESS DOCUMENTATION** for requirements of the project.
- E. **COMPLETION OF WORK:** Work to be done under the Contract is comprised of the furnishing of all labor, materials, equipment and other appurtenances, and obtaining all regulatory agency approvals necessary and required to complete the construction work in accordance with the Contract.
- F. **OMISSION OF DETAILS:** All work called for in the Specifications applicable to the Contract but not shown on the Contract Drawings in their present form, or vice versa, is required, and shall be performed by the Contractor as though it were originally delineated or described. The cost of such work shall be deemed included in the total Contract Price.
- G. **WORK NOT IN SPECIFICATIONS OR CONTRACT DRAWINGS:** Work not particularly specified in the Specifications nor detailed on the Contract Drawings but involved in carrying out their intent or in the complete and proper execution of the work, is required, and shall be performed by the Contractor. The cost of such work shall be deemed included in the total Contract Price.
- H. **SILENCE OF THE SPECIFICATIONS:** The apparent silence of the Specifications as to any detail, or the apparent omission from them of a detailed description concerning any work to be done and materials to be furnished, shall be regarded as meaning that only the best practice is to prevail and that only the best material and workmanship is to be used and interpretation of the Specifications shall be made upon that basis.
- I. **CONFLICT BETWEEN CONTRACT DRAWINGS AND SPECIFICATIONS:** Should any conflict occur in or between the Drawings and Specifications, the Contractor shall be deemed to have estimated the most expensive way of doing the work unless the Contractor shall have asked for and obtained a decision in writing from the Commissioner before the submission of the bid as to what shall govern.

**1.5 CONTRACT DRAWINGS AND SPECIFICATIONS:**

- A. **SCHEDULE C -** The Contract Drawings are listed in Schedule C, which is set forth in the Addendum. Such drawings referred to in the Contract, and in the applicable Specifications for the Contract, bear the general title:

City of New York  
Department of Design and Construction  
Division of Public Buildings
- B. **DOCUMENTS FURNISHED TO THE CONTRACTOR -** After the award of the Contract, the Contractor will be furnished with five (5) complete sets of paper prints of all Contract Drawings mentioned in Paragraph A above, as well as a copy of the Specifications.
- C. **ADDITIONAL COPIES** of Drawings and Specifications, when requested, will be furnished to the Contractor if available.



- D. **SUPPLEMENTARY DRAWINGS** - When, in the opinion of the Commissioner, it becomes necessary to more fully explain the work to be done, or to illustrate the work further, or to show any changes which may be required, drawings known as Supplementary Drawings will be prepared by the Commissioner.
- E. **COMPENSATION** - Where Supplementary Drawings entail extra work, compensation therefore to the Contractor shall be subject to the terms of the Contract. The Supplementary Drawings shall be binding upon the Contractor with the same force as the Contract Drawings.
- F. **SUPPLEMENTARY DRAWING PRINTS** - Three (3) copies of prints of these Supplementary Drawings will be furnished to the Contractor.
- G. **COPIES TO SUBCONTRACTORS** - The Contractor shall furnish each of its subcontractors and material suppliers such copies of Contract Drawings, Supplementary Drawings, or copies of the Specifications as may be required for its work.

**1.6 COORDINATION:**

- A. **COORDINATION AND COOPERATION** - The Contractor shall consult and study the requirements of the Contract Drawings and Specifications for all required work, including all work to be performed by trade subcontractors, so that the Contractor may become acquainted with the work of the project as a whole in order to achieve the proper coordination and cooperation necessary for the efficient and timely performance of the work.
- B. **CONTRACTOR TO CHECK DRAWINGS:** - The Contractor shall verify all dimensions, quantities and details shown on the Contract Drawings, Schedules, or other data received from the Commissioner, and shall notify the Commissioner of all errors, omissions, conflicts and discrepancies found therein. Notice of such errors shall be given before the Contractor proceeds with any work. Figures shall be used in preference to scale dimensions and large-scale drawings in preference to small-scale drawings.

**1.7 SHOP DRAWINGS AND RECORD DRAWINGS:**

Refer to Division I Section 01 33 00 – SUBMITAL PROCEDURES and Section 01 78 39 – PROJECT RECORD DRAWINGS for requirements applicable to shop drawings and record drawings.

**1.8 TEMPORARY FACILITIES, SERVICES AND CONTROLS:**

Refer to Division I Section 01 50 00 – TEMPORARY FACILITIES SERVICES AND CONTROLS for the responsibilities of the Contractor.

**1.9 DUST CONTROL:**

The Contractor shall prepare, execute and manage a "Dust Control Plan" for the prevention of the emission of dust from construction related activities in compliance with 15 RCNY 13-01 et. seq.

**1.10 PROVISIONS REFERENCED IN THE CONTRACT:**

- A. **SCHEDULE A** - Various Articles of the Contract refer to requirements set forth in Schedule A of the General Conditions. Schedule A, which is included in the Addendum, sets forth (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the Contract.

- B. EXTENSION OF TIME - Applications for Extensions of Time, as indicated in Article 13 of the Contract, shall be made in accordance with the Rules of the Procurement Policy Board.
- C. PARTIAL PAYMENTS FOR MATERIALS IN ADVANCE OF THEIR INCORPORATION IN THE WORK PURSUANT TO ARTICLE 42 OF THE CONTRACT – In order to better insure the availability of materials, fixtures and equipment when needed for the work, the Commissioner may authorize partial payment for certain materials, fixtures and equipment, prior to their incorporation in the work, but only in strict accordance with, and subject to, all the terms and conditions set forth in the Specifications, unless an alternate method of payment is elsewhere provided in the Specifications for specified materials, fixtures or equipment.
1. The Contractor shall submit to the Commissioner a written request, in quadruplicate, for payment for materials purchased or to be purchased for which the Contractor needs to be paid prior to their actual incorporation in the work. The request shall be accompanied by a schedule of the types and quantities of materials, and shall state whether such materials are to be stored on or off the site.
  2. Where the materials are to be stored off the site, they shall be stored at a place other than the Contractor's premises (except with the written consent of the Commissioner) and under the conditions prescribed or approved by the Commissioner. The Contractor shall set apart and separately store at the place or places of storage all materials and shall clearly mark same "PROPERTY OF THE CITY OF NEW YORK", and further, shall not at any time move any of said materials to another off-site place of storage without the prior written consent of the Commissioner. Materials may be removed from their place of storage off the site for incorporation in the work upon approval of the Resident Engineer.
  3. Where the materials are to be stored at the site, they shall be stored at such locations as shall be designated by the Resident Engineer and only in such quantities as, in the opinion of the Resident Engineer, will not interfere with the proper performance of the work by the Contractor or by other Contractors then engaged in performing work on the site. Such materials shall not be removed from their place of storage on the site except for incorporation in the work, without the approval of the Resident Engineer.
  4. INSURANCE
    - a. STORAGE OFF-SITE – Where the materials are stored off the site and until such time as they are incorporated in the work, the Contractor shall fully insure such materials against any and all risks of destruction, damage or loss including but not limited to fire, theft, and any other casualty or happening. The policy of insurance shall be payable to the City of New York. It shall be in such terms and amounts as shall be approved by the Commissioner and shall be placed with a company duly licensed to do business in the State of New York. The Contractor shall deliver the original and one (1) copy of such policy or policies marked "Fully Paid" to the Commissioner.
    - b. STORAGE ON THE SITE – Where the materials are stored at the site, the Contractor shall furnish satisfactory evidence to the Commissioner that they are properly insured against loss, by endorsements or otherwise, under the policy or policies of insurance obtained by the Contractor to cover losses to materials owned or installed by the Contractor. The policy of insurance shall cover fire and extended coverage against windstorm, hail, explosion and riot attending a strike, civil commotion, aircraft, vehicles and smoke.
  5. All costs, charges and expenses arising out of the storage of such materials, shall be paid by the Contractor and the City hereby reserves the right to retain out of any partial or final payment made under the Contract an amount sufficient to cover such costs, charges and expenses with the understanding that the City shall have and may exercise any and all other remedies at law for the recovery of such cost, charges and expenses. There shall be no



- increase in the Contract price for such costs, charges and expenses and the Contractor shall not make any claim or demand for compensation therefore.
6. The Contractor shall pay any and all costs of handling and delivery of materials, to the place of storage and from the place of storage to the site of the work; and the City shall have the right to retain from any partial or final payment an amount sufficient to cover the cost of such handling and delivery.
  7. In the event that the whole or any part of these materials are lost, damaged or destroyed in advance of their satisfactory incorporation in the work, the Contractor, at the Contractor's own cost, shall replace such lost, damaged or destroyed materials of the same character and quality. The City will reimburse the Contractor for the cost of the replaced materials to the extent, and only to the extent, of the funds actually received by the City under the policies of insurance hereinbefore referred to. Until such time as the materials are replaced, the City will deduct from the value of the stored materials or from any other money due under the Contract, the amount paid to the Contractor for such lost, damaged or destroyed materials.
  8. Should any of the materials paid for the City hereunder be subsequently rejected or incorporated in the work in a manner or by a method not in accordance with the Contract Documents, the Contractor shall remove and replace, at Contractor's own cost, such defective or improperly incorporated material with materials complying with the Contract Documents. Until such materials are replaced, the City will deduct from the value of the stored materials or from any other money due the Contractor, the amount paid by the City for such rejected or improperly incorporated materials.
  9. Payments for the cost of materials made hereunder shall not be deemed to be an acceptance of such materials as being in accordance with the Contract Documents, and the Contractor always retains and must comply with the Contractor's duty to deliver to the site and properly incorporate in the work only materials which comply with the Contract Documents.
  10. The Contractor shall retain any and all risks in connection with the damage, destruction or loss of the materials paid for hereunder to the time of delivery of the same to the site of the work and their proper incorporation in the work in accordance with the Contract Documents.
  11. The Contractor shall comply with all laws and the regulations of any governmental body or agency pertaining to the priority purchase, allocation and use of the materials.
  12. When requesting payment for such materials, the Contractor shall submit with the partial estimate duly authenticated documents of title, such as bills of sale, invoices or warehouse receipts, all in quadruplicate. The executed bills of sale shall transfer title to the materials from the Contractor to the City. (In the event that the invoices state that the material has been purchased by a subcontractor, bills of sale in quadruplicate will also be required transferring title to the materials from subcontractor to the Contractor).
  13. Where the Contractor, with the approval of the Commissioner, has purchased unusually large quantities of materials in order to assure their availability for the work, the Commissioner, at the Commissioner's option, may waive the requirements of Paragraph 12 provided the Contractor furnishes evidence in the form of an affidavit from the Contractor in quadruplicate, and such other proof as the Commissioner may require, that the Contractor is the sole owner of such materials and has purchased them free and clear of all liens and other encumbrances. In such event, the Contractor shall pay for such materials and submit proof thereof, in the same manner as provided in Paragraph 12 hereof, within seven (7) days after receipt of payment therefore from the Comptroller. Failure on the part of the Contractor to submit satisfactory evidence that all such materials have been paid for in full, shall preclude the Contractor from payments under the Contract.



14. The Contractor shall include in each succeeding partial estimate requisition a summary of materials stored which shall set forth the quantity and value of materials in storage, on or off the site, at the end of each preceding estimate period; the amount removed for incorporation in the work; the quantity and value of materials delivered during the current period and the total value of materials on hand for which payment thereof will be included in the current payment estimate.
  15. Upon proof to the satisfaction of the Commissioner of the actual cost of such materials and upon submission of proper proof of title as required under Paragraph 12 or Paragraph 13 hereof, payment will be made therefore to the extent of 85%, provided however, that the cost so verified, established and approved shall not exceed the estimated cost of such materials included in the approved detailed breakdown estimate submitted in accordance with Article 41 of the Contract; if it does, the City will pay only 85% approved estimated cost.
  16. Upon the incorporation in the work of any such materials, which have been paid for in advance of such incorporation in accordance with the foregoing provisions, payment will be made for such materials incorporated in the work pursuant to Article 42 of the Contract, less any sums paid pursuant to Paragraph 15 herein.
- D. MOBILIZATION PAYMENT – A line item for mobilization shall be allowed on the Contractor's Detailed Bid Breakdown submitted in accordance with Article 41 of the Contract. The Mobilization Payment is intended to include the cost of required bonds, insurance coverage and/or any other expenses required for the initiation of the Contract Work. All costs for mobilization shall be deemed included in the total Contract Price. The Detailed Bid Breakdown shall reflect, and the Mobilization Payment shall be made, in accordance with the following schedule:

Contract Amount	Percent	Mobilization
Less than - \$ 50,000	x 0	= 0
\$ 50,000 - \$ 100,000	x	= \$ 6,000
\$ 100,001 - \$ 500,000	x 6	= \$ 6,000 (min) - \$ 30,000 (max)
\$ 500,000 - \$ 2,500,000	x 5	= \$ 30,000 (min) - \$ 125,000 (max)
Over - \$ 2,500,000	x 4	= \$ 125,000 (min) - \$ 300,000 (max)

The Contractor may requisition for one-half (1/2) of the Mobilization Payment upon satisfactory completion of the following:

1. Installation of any required field office(s).
2. Submission of all required insurance certificates and bonds.
3. Approval by the Department of Design and Construction of the coordinated progress schedule for the project and the Contractor's Shop Drawing schedule.

The remaining balance of the Mobilization Payment may be requisitioned only after 10 percent (10%) of the Contract price, exclusive of the total amount of Mobilization Payments made or to be made hereunder, shall have been approved for payment.

- E. ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING: The Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel in Non-Road Vehicles, and the implementation of Best Available Technology (BAT), as set forth in Article 5.4 of the Contract. Such reports shall be submitted in accordance with the schedule, format, directions and procedures established by the Commissioner.

#### 1.11 PERFORMANCE OF WORK DURING NON-REGULAR WORK HOURS:

- A. **NON-REGULAR WORK HOURS:** The Commissioner may issue a change order in accordance with Article 25 of the Contract which (1) directs the Contractor to perform the Work, or specific components thereof, during other than regular work hours (i.e., evenings, weekends and holidays), and (2) provides compensation to the Contractor for costs in connection with the performance of Work during other than regular work hours. The Commissioner may issue a change order if a delay has occurred and such delay is not the fault of the Contractor, or if the work is of such an important nature that delay in completing such work would result in serious disadvantage to the public.
- B. **PROCEDURE:** The Contractor shall (1) obtain whatever permits may be required for performance of the work during other than regular business hours, and (2) pay all necessary fees in connection with such permits. In addition, if directed by the Commissioner, the Contractor shall make immediate application to the Commissioner of the Department of Labor, State of New York, for dispensation in accordance with Subdivision 2 of Section 220 of the Labor Law.

#### 1.12 INTERRUPTION OF SERVICES AT EXISTING FACILITIES:

- A. **EVENING AND WEEKEND WORK** - Where performance of the Work requires the temporary shutdown(s) of services, such shutdown(s) shall be made at night or on weekends or at such times that will cause no interference with the established routines and operations of the facility in question.
  - 1 Where weekend or evening work is required due to unavoidable service shutdowns, such work shall be performed at no extra cost to the City. Components of the Work that must be performed during other than regular work hours are indicated in the Drawings and/or the Specifications.
- B. **INTERRUPTION OF EXISTING FACILITIES:**
  - 1 The Contractor shall not interrupt any of the services of the facility nor interfere with such services in any way without the permission of the Commissioner. Such interruption or interferences shall be made as brief as possible, and only at such time stated.
  - 2 Under no circumstances shall the Contractor, its subcontractors, or its workers, be permitted to use any part of the project as a shop, without the permission of the Commissioner.
  - 3 Unnecessary noise shall be avoided at all times and necessary noise shall be reduced to a minimum.
  - 4 Toilet facilities, water and electricity must be operational at all times (i.e. 24/7). No services of the facility can be interrupted in any way without the permission of the Commissioner. Careful coordination of all work with the Resident Engineer must be done to maintain the operational level of the project personnel at the facility.
  - 5 The Contractor shall schedule the work to avoid noise interference that will affect the normal functions of the facility. In particular, construction operations producing noises that are objectionable to the functions of the facility must be scheduled at times of day or night, day of the week, or weekend, which will not interfere with personnel at the facility. Any additional cost resulting from this scheduling shall be borne by the Contractor.





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

- 6 The Contractor shall arrange to work continuously, including evening and weekend hours, if required, to assure that services will be shut down only during the time actually required to make the necessary connections to the existing facility.
- 7 The Contractor shall give ample written notice in advance to the Commissioner and personnel at the facility of any required shutdown.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 10 00**



**SECTION 01 31 00**  
**PROJECT MANAGEMENT AND COORDINATION**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

**1.2 SUMMARY:**

- A. This Section includes administrative provisions for coordinating construction operations on the Project including without limitation the following.
  - 1. Coordination Drawings.
  - 2. Administrative and supervisory personnel.
  - 3. Project meetings.
  - 4. Requests for Interpretation (RFIs).
- B. This section includes the following:
  - 1. Definitions
  - 2. Coordination
  - 3. Submittals
  - 4. Administrative and Supervisory Personnel
  - 5. Project Meetings
  - 6. Requests for Interpretation (RFI's)
  - 7. Correspondence
  - 8. Contractor's Daily Reports
  - 9. Alternate and Substitute Equipment
- C. RELATED SECTIONS: include without limitation the following:
  - 1. Section 01 10 00 SUMMARY
  - 2. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
  - 3. Section 01 33 00 SUBMITTALS
  - 4. Section 01 35 26 SAFETY REQUIREMENTS
  - 5. Section 01 73 00 EXECUTION REQUIREMENTS
  - 6. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

7. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

**1.3 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.4 COORDINATION:**

- A. Coordination: The Contractor shall coordinate its construction operations, including those of its subcontractors, with other entities to ensure the efficient and orderly installation of each part of the Work. The Contractor shall coordinate the various operations required by different Sections of the Specifications that depend on each other for proper installation, connection, and operation.
  - 1. Schedule construction operations in sequence in order to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
  - 2. Coordinate installation of different components to ensure maximum accessibility for required maintenance, service, and repair.
  - 3. Make adequate provisions to accommodate items scheduled for later installation.
  - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair of all components, including mechanical and electrical.
- B. The Contractor shall prepare memoranda for distribution to its subcontractors and other involved entities, outlining special procedures required for coordination. Such memoranda shall include required notices, reports, and meeting minutes as applicable.
- C. Administrative Procedures: The Contractor shall coordinate scheduling and timing of required administrative procedures with other construction activities and activities of its subcontractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include without limitation the following:
  - 1. Preparation of Contractor's Construction Schedule.
  - 2. Installation and removal of temporary facilities and controls.
  - 3. Delivery and processing of submittals.
  - 4. Progress meetings.
  - 5. Pre-installation conferences..
  - 6. Startup and adjustment of systems.
  - 7. Project closeout activities.
- D. Conservation: The Contractor shall coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.

- E. Salvaged Items, Material and/or Equipment: The Specifications may identify certain items, materials or equipment which must be salvaged by the Contractor and handled or disposed of as directed. The Contractor shall comply with all directions in the Specifications regarding the salvaging and handling of identified items, material or equipment.

#### 1.5 SUBMITTALS:

- A. Submit shop drawings, product data, samples etc. in compliance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Coordination Drawings: The Contractor shall prepare applicable Coordination Drawings in compliance with the requirements for Coordination Drawings in Section 01 33 00, SUBMITTAL PROCEDURES.
- C. Safety Plan in compliance with Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES.
- D. Waste Management Plan in compliance with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- E. Key Personnel Names: Within 15 days after the Notice to Proceed, the Contractor shall submit a list of key personnel assignments of the Contractor and its subcontractors, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in case of the absence of individuals assigned to Project.
1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.
  2. In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work. Include special personnel required for coordinating all operations by its subcontractors.

#### 1.6 PROJECT MEETINGS:

- A. General: The Resident Engineer will hold regularly scheduled construction progress meetings at the site, at which time the Contractor and appropriate subcontractors shall have their representatives present to discuss all details relative to the execution of the work. The Resident Engineer shall preside over these meetings.
1. Agenda: Prior to each meeting, the Resident Engineer will consult with the Contractor and will prepare an agenda of items to be discussed. In general, after informal discussion of any item on the agenda, the Resident Engineer will summarize the discussion in a brief written statement, and the Contractor will then dictate a brief statement for the record.
  2. Coordination: In addition to construction progress meetings called by the Resident Engineer, the Contractor shall hold regularly scheduled meetings for the purpose of coordinating; expediting and scheduling the work in accordance with the master coordinated Job Progress Chart. The Contractor and its subcontractors, material suppliers or vendors whose presence is necessary, are required to attend. These meetings may, at the discretion of the Contractor, be held at the same place and immediately following the project meetings held by the Resident Engineer. Minutes of these meetings shall be recorded, typed and printed by the Contractor and distributed to all parties concerned.
- B. PRECONSTRUCTION KICK-OFF MEETING:
1. The Resident Engineer will schedule a preconstruction kick-off meeting either at DDC's main office or at the Project site to review responsibilities and personnel assignments and clarify the



role of each participant. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.

2. Attendees: Authorized representative of the Client Agency; Design Consultant; the Contractor and its superintendents, subcontractor(s) and their superintendent(s); LEED sub-consultant and Commissioning Authority /Agent (CxA) as applicable and other concerned parties. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Contract Work.
3. Agenda: Includes without limitation the following as applicable:
  - a. Establishing construction schedule
  - b. Schedule for regular construction meetings
  - c. Phasing
  - d. Critical work sequencing and long-lead items
  - e. Designation of key personnel and their duties
  - f. Reviewing Application for Payment and Change Order Procedures
  - g. Procedures for Requests for Information (RFIs.)
  - h. Review Permits and Approval requirements
  - i. Review all recent Administrative Code reporting requirements relating to the project, (i.e. LL 77, LL86 etc.)
  - j. Procedures for testing and inspecting
  - k. Reviewing special conditions at the Project site
  - l. Distribution of the Contract Documents
  - m. Submittal procedures
  - n. Safety Procedures
  - o. LEED requirements
  - p. Commissioning Requirements
  - q. Preparation of Record Documents
  - r. Historic Treatment requirements
  - s. Use of the premises
  - t. Work restrictions
  - u. Client Agency occupancy requirements
  - v. Responsibility for temporary facilities, services and controls
  - w. Construction Waste Management and Disposal
  - x. Indoor Air Quality Management Plan
  - y. Dust Mitigation Plan
  - z. Office, work, and storage areas
  - aa. Equipment deliveries and priorities
  - bb. Security
  - cc. Progress cleaning
  - dd. Working hours



**C. CONSTRUCTION PROGRESS MEETINGS:**

1. The Resident Engineer will schedule and conduct construction progress meetings at bi-weekly intervals or as otherwise determined. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Work. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.
2. Attendees:
  - a. Design Consultant and applicable sub-consultants
  - b. Client Agency Representative
  - c. Representatives from the Contractor, sub-contractor(s), suppliers or other entities involved in the current progress, planning, coordination or future activities of the Work
  - d. Other appropriate DDC personnel, DDC consultants and concerned parties
3. Agenda: Includes without limitation the following:
  - a. Review the Construction Schedule and progress of the Work. Determine if the Work is on time, ahead of schedule or behind schedule. Determine actions to be taken to maintain or accelerate the schedule
  - b. Review and approve prior meeting minutes and follow up open issues
  - c. Coordinate work between each subcontractor
  - d. Sequence of Operations
  - e. Status of submittals, deliveries and off-site fabrication
  - f. Status of inspections and approvals by governing agencies
  - g. Temporary facilities and controls
  - h. Review Site Safety
  - i. Quality and work standards
  - j. Field observations
  - k. Status of correction of deficient items
  - l. RFI's
  - m. Pending changes
  - n. Status of outstanding Payments and Change Orders
  - o. LEED requirements including Construction Waste Management, Indoor Air Quality Plan, Dust Mitigation and Commissioning
  - p. Status of Administrative Code reporting requirements related to the project.

**1.7 REQUESTS FOR INFORMATION (RFI):**

- A. Procedure: Immediately on discovery of the need for information or interpretation of the Contract Documents, and if not possible to request interpretation at Project meeting, the Contractor shall prepare and submit an RFI in the form specified by the Resident Engineer.
  1. RFI shall originate with the Contractor. RFIs submitted by entities other than Contractor will be returned with no response.
  2. Coordinate and submit RFI in a prompt manner to the Resident Engineer so as to avoid delays in Contractor's work or work of its subcontractors.
  3. RFI Log: The Contractor shall prepare, maintain, and submit a tabular log of RFIs organized by the RFI number monthly to the Resident Engineer.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

4. On receipt of responses and action to the RFI, the Contractor shall update the RFI log and immediately distribute the RFI response to affected parties. Review response(s) and notify the Resident Engineer immediately if the Contractor disagrees with response(s).

**1.8 CORRESPONDENCE:**

Copies of all correspondence to DDC shall be sent directly to the Resident Engineer at the job site.

**1.9 CONTRACTOR'S DAILY REPORTS:**

The Contractor shall prepare and submit Daily Construction Progress Reports as outlined in Section 01 32 00, CONSTRUCTION PROGRESS DOCUMENTATION.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 31 00**

**SECTION 01 32 00**  
**CONSTRUCTION PROGRESS DOCUMENTATION**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for establishing an effective base line schedule for the project and documenting the progress of construction during performance of the Work by developing, revising as necessary, various documents including but not limited to the following:
1. Baseline Construction Schedule.
  2. Composite Schedule for entire project
  3. Recovery Composite Schedule
  4. Revised and/or updated Composite Schedule
  5. Submittals Schedule.
  6. Daily construction reports.
  7. Material location reports.
  8. Field condition reports.
  9. Special reports.
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
  2. Section 01 32 22 PHOTOGRAPHIC DOCUMENTATION
  3. Section 01 33 00 SUBMITTAL PROCEDURES
  4. Section 01 40 00 QUALITY REQUIREMENTS

**1.3 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.





- C. **Baseline Construction Schedule:**  
A horizontal bar chart type schedule (Microsoft Project OR similar program) listing all the activities and their duration for entire contract duration OR construction period, including logical ties and interrelations between the activities necessary for the timely and successful completion of the project. Critical path activities shall be clearly marked. The Baseline construction schedule is a preliminary schedule that must be reviewed and approved by the Resident Engineer.
- D. **Composite Schedule:**  
A composite horizontal bar chart type schedule (Microsoft Project OR similar program) listing all activities to be performed by the Contractor and its subcontractors, the duration of each activity including logical ties and interrelations between activities, and the sequence of each of necessary activities for the timely and successful completion of the project within the stipulated contract duration. Critical path activities shall be clearly marked. The Composite schedule must be signed and submitted by the Contractor within thirty (30) calendar days after the date established for commencement of the Contract, unless otherwise directed. The Composite Schedule must be reviewed and approved by the Resident Engineer.
- E. **Recovery Composite Schedule:** A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order.  
  
A Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions. In such case special attention must be given to keep the delays as minimum as possible and must establish the nature of efforts such as extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors, consultants, clients, end users and/or other concerned parties.  
  
Such schedule must be prepared and submitted within Five (5) calendar days of request by the Resident Engineer. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.
- F. **Revised and/or Updated Composite Schedule:**  
  
A Baseline construction schedule OR Composite Schedule OR Recovery Composite Schedule for the project that shows the actual duration of all the completed activities, including duration of and the reasons for delays, if any has occurred, AND revisions to all remaining activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined activities. Any such revisions should be shown on the row just below the approved schedule of the respective activity so that revisions can be compared.  
  
The Revised and/or updated Composite Schedule must be reviewed and approved by the Resident Engineer.
- G. **Activity:** A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
- H. **Event:** The starting or ending point of an activity.
- I. **Fragment:** A part of the activity that breaks down activities into smaller activities for greater detail.
- J. **Milestone:** A key or critical point in time for reference or measurement.
- K. **Network Diagram:** A graphic diagram of a network schedule, showing activities and activity relationships.

## PART II – PRODUCTS

### 2.1 BASELINE CONSTRUCTION SCHEDULE:

- A. The Contractor shall prepare a Baseline horizontal bar-chart-type construction schedule for the project. Submit the Baseline Construction Schedule to the Resident Engineer within (15) fifteen calendar days after the date established for commencement of the Contract, unless directed otherwise. The Baseline Schedule must be reviewed and approved by the Resident Engineer.
1. Provide a separate time bar for each significant construction activity. Coordinate each activity on the schedule with other construction activities for proper interrelationship & sequence.
  2. Duration: The duration of each activity on the schedule besides installation must clearly show required duration of filing for permits, inspections, testing, approvals, shop drawings and materials submittals and approvals, fabrication, delivery, phasing for each construction activity.
  3. Schedule shall be time-scaled in not more than weekly increments, with the dates of the first day (Monday) of each week indicated.
  4. Completion of all the project activities shall be indicated in advance of the date established for completion of the Contract, allowing time for required inspection and punch list work.
  5. Clearly show time bar for all the tasks, to be completed before start of physical work of scheduled activities, including but not limited to obtaining required permit, subcontractor approval, submission and approval of shop drawings, field verification, time for fabrication and delivery, testing of materials and/or samples, preparation and approval of mock-up sample, curing, pre-testing of soil, pre-testing of equipment - including start up, testing & adjusting, filing for inspection by regulatory agencies, training, final use, etc. required to maintain orderly progress of the activity. A special consideration must be given to those activities requiring early approvals because of long lead-time for manufacture or fabrication.
  6. Phasing: Arrange all activities in proper sequence to reflect requirements for phased completion, work by other entities, work by the City, City furnished items, coordination with existing work, limitations arising due to continued occupancies, non-interruptible services, partial completion for occupancy, site restrictions, provisions for future work, seasonal variations, environmental control, and similar conditions of the project.
  7. Arrange all activities and/or show interrelationship and logical sequence of all activities, determine and mark all critical path activities including any phasing reflecting actual project condition.
  8. Keep at least two blank horizontal bars between all activities for recording actual progress and submitting Revised Schedule as defined in Sub-Section 1.3 G
  9. If necessary a new revised schedule shall be prepared in the same manner as outlined above.

### 2.2 COMPOSITE SCHEDULE FOR THE PROJECT:

- A. The Contractor shall prepare a Composite Schedule based on the approved Baseline Schedule Such schedule shall indicate graphically and chronologically the start and completion of each and every activity, including all the pre-activity and post activity tasks. Keep at least two blank horizontal bars between all activities for recording actual progress and/or revisions.
1. If necessary the Contractor shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Composite Schedule. The Composite Schedule must be finalized and signed by the Contractor within (30) thirty calendar days after the date established for commencement of the Contract, unless directed otherwise. The Composite Schedule must be reviewed and approved by the Resident Engineer.

### 2.3 RECOVERY COMPOSITE SCHEDULE:

- A. A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order. A Recovery Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions, must be developed and submitted within (5) five calendar days of the request by the Resident Engineer. Such Recovery Composite Schedule shall include all information as defined in Article 1.3 F and shall be prepared in the same manner as outlined in Sub-Sections 2.1 and 2.2. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.

### 2.4 REVISED AND/OR UPDATED COMPOSITE SCHEDULE:

- A. The Contractor shall revise and/or update the approved Composite Schedule as directed. The Revised schedule shall be prepared in the same manner as outlined above in Sub-Sections 2.1 and 2.2.
- B. The Contractor shall mark actual progress, delays, work stoppage etc. in the row just below the approved schedule for the respective activity so that revisions can be compared.
- C. Such schedule also shall indicate graphically and chronologically any revisions to the start and completion of the remaining activities including revisions to all the pre-activity and post activity tasks for all subcontractors.
- D. If necessary, the Contractor shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Revised Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Schedule. Such schedule must be prepared and submitted by the Contractor within Five (5) calendar days of request by the Resident Engineer. The Revised Composite Schedule must be reviewed and approved by the Resident Engineer.

### 2.5 SUBMITTALS SCHEDULE:

- A. Preparation: The Contractor shall submit a schedule of submittals, arranged in chronological order by dates required by the construction schedule. Include time required for review, re-submittal, ordering, manufacturing, fabrication, and delivery when establishing dates.
- B. SCHEDULE F: Schedule F sets forth all submittal requirements for shop drawings and material samples. Schedule F is included in the Addendum. At the kick-off meeting, the Contractor must review this Schedule with the Resident Engineer and the Design Consultant. Within 10 days after the kick-off meeting, the Contractor must complete information on Schedule F concerning the submission date, the required delivery date and the fabrication time. For all required submittals of shop drawings and material samples, the Schedule F provided by the Contractor must indicate a submission date which is at least 20 business days prior to the date of the manufacture of the item or materials to be installed. In addition, if so directed by the Commissioner, the Schedule F provided by the Contractor must indicate a submission date for shop drawings and/or material samples of specified items or materials which is within 60 business days after the kick-off meeting. In the event of any conflict between the Specifications and Schedule F, Schedule F shall take precedence; provided, however, in the event of an omission from Schedule F (i.e., Schedule F omits either a reference to or information concerning a submittal requirement which is set forth in the Specifications), such omission from Schedule F shall have no effect and the Contractor's submittal obligation, as set forth in the Specifications, shall remain in full force and effect.
- C. Review: The Resident Engineer will review the Schedule F submitted by Contractor. Upon acceptance, the Resident Engineer will date and sign the schedule as approved and transmit it to the Design Consultant, Contractor and others within DDC as he/she deems appropriate.



## 2.6 REPORTS:

- A. Daily Construction Reports: The Contractor shall submit to the Resident Engineer written Daily Construction Reports at the end of each work day, recording basic information such as the date, day, weather conditions, and contract days passed, remaining contract duration/days and the following information concerning the Project.

Information: The reports shall be prepared by the Contractor's Superintendent and shall bear the Contractor's Superintendents signature. Each report shall contain the following information:

1. List of name of Contractor, subcontractors, their work force in each category, and details of activities performed.
2. The type of materials and/or major equipment being installed by the Contractor and/or by each subcontractor.
3. The major construction equipment being used by the Contractor and/or subcontractors.
4. Material and Equipment deliveries.
5. High and low temperatures and general weather conditions.
6. Accidents.
7. Meetings and significant decisions.
8. Unusual events.
9. Stoppages, delays, shortages, and losses.
10. Meter readings and similar recordings
11. Emergency procedures.
12. Orders and/or requests of authorities having jurisdiction.
13. Approved Change Orders received and implemented.
14. Field Orders and Directives received and implemented.
15. Services connected and disconnected.
16. Equipment or system tests and startups.
17. Partial Completions and occupancies.
18. Substantial Completions authorized.

NOTE: If there is NO ACTIVITY at site, a daily report indicating so and the reason for no activity at the site must be submitted.

- B. Material Location Reports: The contractor shall submit a Material Location Report at weekly OR monthly intervals as determined and established by the Resident Engineer. Such report shall include a comprehensive list of materials delivered to and stored at Project site. List shall be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit a Request For Information (RFI) form with a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

## 2.7 SPECIAL REPORTS:

- A. Accident report, incident report, special condition report for the conditions out of control of any party involved with the project effecting project progress, explaining impact on the project schedule and cost if any.

**PART III – EXECUTION (Not Used)**  
**END OF SECTION 01 32 00**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text



**SECTION 01 32 33**  
**PHOTOGRAPHIC DOCUMENTATION**

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 33**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract]

**1.2 SUMMARY:**

- A. This Section includes the following:
1. Photographic Media
  2. Construction Photographs
  3. Pre-construction Photographs
  4. Periodic Construction Progress Photographs
  5. Special Photographs
  6. DVD Recordings
  7. Final Completion Construction Photographs
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
  2. Section 01 33 00 SUBMITTAL PROCEDURES
  3. Section 01 35 91 HISTORIC TREATMENT PROCEDURES
  4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
  5. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- C. PHOTOGRAPHER - The Contractor shall employ and pay for the services of a professional photographer who shall take photographs showing the progress of the work for all Contracts.

**1.3 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.4 SUBMITTALS:**

- A. Qualification Data: For photographer.

- B. Key Plan: With each Progress Photograph Submittal include a key plan of Project site and building with notation of vantage points marked for location and direction of each image. Indicate location, elevation or story of construction. Include same label information as corresponding set of photographs.
- C. Construction Progress Photograph Prints: Take Progress Photographs bi-weekly and submit four color prints of each photographic view for each trade to the Resident Engineer. Such photographs shall be included in each monthly progress report or as otherwise directed by the Resident Engineer.
- D. Construction Photograph Negatives: Submit a complete set of photographic negatives in individually protected negative sleeves with each submittal of prints. Identify negatives with label matching photographic prints.
- E. Digital Images: If Digital Media is used, submit a complete set of digital color image electronic files on CD-ROM with each submittal of prints. Identify electronic media with date photographs were taken. Submit images that have same aspect ratio as the sensor, un-cropped.

**1.5 QUALITY ASSURANCE:**

- A. Photographer Qualifications: An individual who has been regularly engaged as a professional photographer of construction projects for not less than three years.

**1.6 COORDINATION:**

- A. The Contractor and its subcontractor(s) shall cooperate with the photographer and provide auxiliary services requested, including access to Project site and use of temporary facilities, including temporary lighting required to produce clear, well-lit photographs without obscuring shadows.

**1.7 COPYRIGHT:**

- A. The Contractor shall include the provisions set forth below in the agreement between the Contractor and the Photographer who will provide the construction photographs described in this section. The Contractor shall submit to the Resident Engineer a copy of its agreement with the Photographer.
- B. Any photographs, images and/or other materials produced pursuant to this Agreement, and any and all drafts and/or other preliminary materials in any format related to such items produced pursuant to this Agreement, shall upon their creation become the exclusive property of the City.
- C. Any photographs, images and/or other materials provided pursuant to this Agreement ("Copyrightable Materials") shall be considered "work-made-for-hire" within the meaning and purview of Section 101 of the United States Copyright Act, 17 U.S.C. § 101, and the City shall be the copyright owner thereof and of all aspects, elements and components thereof in which copyright protection might exist. To the extent that the Copyrightable Materials do not qualify as "work-made-for-hire," the Photographer hereby irrevocably transfers, assigns and conveys exclusive copyright ownership in and to the Copyrightable Materials to the City, free and clear of any liens, claims, or other encumbrances. The Photographer shall retain no copyright or intellectual property interest in the Copyrightable Materials. The Copyrightable Materials shall be used by the Photographer for no purpose other than in the performance of this Agreement without the prior written permission of the City. The Department may grant the Photographer a license to use the Copyrightable Materials on such terms as determined by the Department and set forth in the license.
- D. The Photographer acknowledges that the City may, in its sole discretion, register copyright in the Copyrightable Materials with the United States Copyright Office or any other government agency authorized to grant copyright registrations. The Photographer shall fully cooperate in this effort, and agrees to provide any and all documentation necessary to accomplish this.



- E. The Photographer represents and warrants that the Copyrightable Materials: (i) are wholly original material not published elsewhere (except for material that is in the public domain); (ii) do not violate any copyright Law; (iii) do not constitute defamation or invasion of the right of privacy or publicity; and (iv) are not an infringement, of any kind, of the rights of any third party. To the extent that the Copyrightable Materials incorporate any non-original material, the Photographer has obtained all necessary permissions and clearances, in writing, for the use of such non-original material under this Agreement, copies of which shall be provided to the City.

## **PART II – PRODUCTS**

### **2.1 PHOTOGRAPHIC MEDIA:**

- A. Photographic Film: Medium format, 2-1/4 by 2-1/4 inches (60 by 60 mm).
- B. Digital Images:
1. Construction Progress Images: Color images in JPEG format with minimum sensor size of 1.3 megapixels.
  2. Presentation Quality Images: Provide Color images in uncompressed TIFF format, produced by a digital camera with minimum sensor size of 4.0 megapixels, and at an image resolution of not less than 1024 by 768 with 8"x10" original capture at 300 dpi or greater.
- C. Prints:
1. Format: 8-by-10-inch (203-by-254-mm) smooth-surface matte color prints on single-weight commercial-grade stock paper, with 1inch wide margins and punched for standard 3-ring binder.
  2. Identification: On the front of each photograph affix a label in the margin with Project name and date photograph was taken. On the back of each print, provide an applied label or rubber-stamped impression with the following information:
    - a. Project Contract I.D. Number.
    - b. Project Contract Name.
    - c. Name of Contractor. (and Subcontractor Trade Represented)
    - d. Subject of Image Taken.
    - e. Date and time photograph was taken if not date stamped by camera.
    - f. Description of vantage point, indicating location, direction and other pertinent information.
    - g. Unique sequential identifier.
    - h. Name and address of photographer.

## **PART III – EXECUTION**

### **3.1 CONSTRUCTION PHOTOGRAPHS:**

- A. General: Take photographs using the maximum range of depth of field, and that are in focus, to clearly show the Work. Photographs with blurry or out-of-focus areas will not be accepted.
1. Maintain key plan with each set of construction photographs that identifies each photographic location and direction of view.
- B. Film Images:
1. Date Stamp: Unless otherwise indicated, date and time stamp each photograph as it is being taken so stamp is integral to photograph.



2. Field Office Prints: Retain one set of prints of progress photographs in the field office at Project site, available at all times for reference. Identify photographs same as for those submitted to Commissioner.
- C. Digital Images: Submit digital images exactly as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
  1. Date and Time: Include date and time in filename for each image.
  2. Field Office Images: Maintain one set of images on CD-ROM in the field office at Project site, available at all times for reference. Identify images same as for those submitted to Commissioner.

### **3.2 PRE-CONSTRUCTION & PRE-DEMOLITION PHOTOGRAPHS:**

- A. Before commencement of Contract work at the site, take color photographs of Project site and surrounding properties, including existing structures or items to remain during construction, from different vantage points, as directed by the Resident Engineer.
  1. Flag applicable excavation areas and construction limits before taking construction photographs.
  2. Take photographs of minimum eight (8) views to show existing conditions adjacent to property before starting the Work.
  3. Take applicable photographs of minimum eight (8) views of existing buildings either on or adjoining property to accurately record physical conditions at start of construction.
  4. Take additional photographs as required or directed by the Resident Engineer to record settlement or cracking of adjacent structures, pavements, and improvements.
- B. Demolition Operations: Take photographs as directed by the Resident Engineer of minimum of eight (8) views each before commencement of demolition operations, at mid-point of operations and at completion of operations.
- C. Pre-Demolition Photographs: Take archival quality color photographs, to include all exterior building facades, of all structures at the Project site designated to be fully demolished or removed in compliance with NYC Building Code requirements. Submit four (4) complete sets of pre-demolition photographs, in the format specified herein, to the Resident Engineer for submission to the Department of Buildings.

### **3.3 PERIODIC CONSTRUCTION PROGRESS PHOTOGRAPHS:**

- A. Take photographs of minimum eight (8) views bi-weekly as directed by the Resident Engineer of construction progress for each contract trade. Select vantage points to show status of construction and progress since last photographs were taken.

### **3.4 SPECIAL PHOTOGRAPHS:**

- A. The photographer shall take special photographs of subject matter or events as specified in other sections of the Project Specifications from vantage points specified or as otherwise directed by the Resident Engineer.
- B. Historical Elements: As required in Section 01 35 91, HISTORIC TREATMENT PROCEDURES, for Contract work at designated landmark structures or sites the photographer, as specified and required by individual sections of the Contract documents or at the direction of the Commissioner, shall take images of existing elements scheduled to be removed for replacement, repair or replication in quantities as directed, including post-construction photographs of completed work as directed by the Commissioner.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

1. Take Presentation Quality Photographs of designated landmark structures as directed by the Commissioner for submission to the New York City Landmarks Preservation Commission. Provide a minimum of four color photographic prints of each view as directed.

**3.5 DVD RECORDING:**

- A. When DVD Recording of Demonstration and Training sessions is required for Non-Commissioned projects the Contractor shall provide the services of a Videographer as indicated in Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

**3.6 FINAL COMPLETION CONSTRUCTION PHOTOGRAPHS:**

- A. Take color photographs of minimum eight (8) unobstructed views of the completed project or project and site, as directed by the Commissioner and after all scaffolding, hoists, shanties, field offices or other temporary work has been removed and final cleaning is done after date of Substantial Completion for submission as Project Record Documents. Submit four (4) sets of each view of Presentation Quality photographic prints including negatives and/or digital images electronic file

**END OF SECTION 01 32 33**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

**SECTION 01 33 00  
SUBMITTAL PROCEDURES**

**PART I – GENERAL:**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Coordination Drawings, Catalogue Cuts, Material Samples and other submittals required by the Contract Documents.
- B. Review of submittals does not relieve the Contractor of responsibility for any Contractor's errors or omissions in such submittals, nor from responsibility for complying with the requirements of the Contract.
- C. Responsibility of the Contractor: The approval of Shop Drawings will be general and shall not relieve the Contractor of responsibility for the accuracy of such Shop Drawings, nor for the proper fitting and construction of the work, nor of the furnishing of materials or work required by the Contract and not indicated on the Shop Drawings. Approval of Shop Drawings shall not be construed as approving departures from the Contract Drawings, Supplementary Drawings or Specifications.
- D. This Section includes the following:
1. Definitions
  2. Submission Procedures
  3. Coordination Drawings
  4. LEED Submittals
  5. Ultra Low Sulfur Diesel Fuel Reporting
  6. Construction Photographs and DVD Recordings
  7. As-Built Documents

**1.3 RELATED SECTIONS:** Include without limitation the following:

- |    |                  |  |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY  |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION                |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION                |
| D. | Section 01 32 33 | PHOTOGRAPHIC DOCUMENTATION                         |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES                                |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS                          |
| G. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Submittals: Written and graphic information that requires responsive actions and includes without limitation all shop drawings, product data, letters of certification, tests and other information required for quality control and as required by the Contract Documents.
- D. Informational Submittals: Written information that does not require responsive action. Submittals may be rejected for non-compliance with the Contract.
- E. Shop Drawings: Include drawings, diagrams, illustrations, schedules, performance charts, brochures, and other data, except for coordination drawings, specifically prepared for the project by the Contractor or any subcontractor, manufacturer, supplier or distributor, which illustrates how specific portions of the work shall be fabricated and/or installed.
- F. Coordination Drawings: As required in Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION.
- G. Product Data and Quality Assurance Submittals: Includes manufacturer's standard catalogs, pamphlets and other printed materials including without limitation the following:
  - 1. Catalogue and Product specifications
  - 2. Installation instructions
  - 3. Color charts
  - 4. Catalog cuts
  - 5. Rough-in diagrams and templates
  - 6. Wiring diagrams
  - 7. Performance curves
  - 8. Operational range diagrams
  - 9. Mill reports
  - 10. Design data and calculations
  - 11. Certification of compliance or conformance
  - 12. Manufacturer's instructions and field reports

#### 1.5 COORDINATION DRAWINGS:

- A. The Contractor shall provide reproducible Coordination Drawing(s) of the reflective ceiling showing the integration of all applicable contract work, including general construction work as well as trade work (Plumbing, HVAC, and Electrical) to be performed by subcontractors. The Coordination Drawing(s) shall include, without limitation, the following information:
  - 1. General Construction work showing the reflective ceiling plan including starting points, ceiling and beam soffits elevations, ceiling heights, roof openings, etc.
  - 2. HVAC Contract work showing ductwork, heating and sprinkler piping, location of grilles, registers etc. and access doors in hung ceilings. Locations shall be fixed by elevations and dimensions from column centerlines and/or walls.
  - 3. Plumbing Contract work including piping, valves, cleanouts etc., indicating locations and elevations and shall indicate the necessary access doors.
  - 4. Electrical Contract work indicating fixtures, large conduit runs, clearances, pull boxes, junction boxes, sound system speakers, etc.
- B. The Contractor shall issue the completed Coordination Drawing(s) to the Resident Engineer for his/her review. The Resident Engineer may call as many meetings as necessary with the Contractor, including



attendance by applicable subcontractors, and may call on the services of the Design Consulting where necessary, to resolve any conflicts that become apparent.

- C. Upon resolution of any conflicts, the Contractor shall provide a final Coordination Drawing(s) which will become the Master Coordination Drawing(s). The Master Coordination Drawing(s) shall be signed and dated by the Contractor to indicate acceptance of the arrangement of the work.
- D. A reproducible copy of the Master Coordination Drawing(s) shall be provided by the Contractor to each of the appropriate subcontractor(s), the Resident Engineer and the Design Consultant for information.
- E. Shop Drawings shall not be submitted prior to acceptance of the final coordinated drawings and shall be prepared in accordance with the Master Coordination Drawing(s). No work will be permitted without accepted Shop Drawings. It is therefore essential that this procedure be instituted as quickly as possible.

### 1.6 SUBMITTAL PROCEDURES:

- A. Refer to Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS and Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS for additional submittal requirements involving electrical and mechanical work or equipment of any nature called for the project.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
  - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activities, with the Submittal Schedule specified in Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION.
  - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
  - 3. The Commissioner reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Submittals Schedule: The Submittals Schedule is set forth in Schedule F, which is included in the Addendum.
- D. Identification: Place a permanent label or title block on each submittal for identification.
  - 1. Indicate name of firm or entity that prepared each submittal on label or title block.
  - 2. Provide a space approximately 6 by 8 inches on label or beside title block to record Contractor's review and approval markings and action taken by Design Consultant.
  - 3. Include the following minimum information on label for processing and recording action taken:
    - a. Project name, DDC Project Number and Contract Number
    - b. Date.
    - c. Name and address of Design Consultant.
    - d. Name and address of Contractor.
    - e. Name and address of subcontractor.
    - f. Name and address of supplier.
    - g. Name of manufacturer.
    - h. Submittal number or other unique identifier, including revision identifier.
    - i. Number and title of appropriate Specification Section.
    - j. Drawing number and detail references, as appropriate.
    - k. Location(s) where product is to be installed, as appropriate.
    - l. Other necessary identification.
- E. Transmittal:
  - 1. Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form in triplicate. Transmittals received from sources other than the



Contractor will be returned without review. Re-submission of the same drawings or product data shall bear the original number of the prior submission and the original titles.

2. Transmittal Form: Provide locations on form for the following information:
  - a. Project name, DDC Project number and Contract Number
  - b. Date.
  - c. Destination (To:).
  - d. Source (From:)
  - e. Names of Contractor, subcontractor, manufacturer, and supplier.
  - f. Category and type of submittal.
  - g. Submittal purpose and description.
  - h. Specification Section number and title.
  - i. Drawing number and detail references, as appropriate.
  - j. Transmittal number, numbered consecutively.
  - k. Submittal and transmittal distribution record.
  - l. Remarks.
  - m. Signature of transmitter.

F. Shop Drawings:

1. Procedures for Preparing, Forwarding, Checking and Returning all Shop Drawings shall be, generally, as follows:
  - a. The Contractor shall make available to its subcontractors the necessary Contract Documents and shall instruct such subcontractor to determine dimensions and conditions in the field, particularly with reference to coordination between the trade subcontractors. The Contractor shall direct its subcontractors to prepare Shop Drawings for submission to the Design Consultant in accordance with the requirements of these General Conditions. The Contractor shall also direct its subcontractors to "Ring Up" corrections made on all re-submissions for approval, so as to be readily seen, and that the symbol "sub" be used to identify the source of the correction or information that has been added.  
  
The Contractor shall:
    1. Review and be responsible to the Commissioner, for information shown on its subcontractor's Shop and Installation drawings and manufacturers' data, and also for conformity to Contract Documents.
    2. "Ring Up" corrections made on all submissions for approval, so as to be readily seen, and that the symbol "GC", "PL", "HVAC" or "EL" be used to indicate that the correction and/or information added was made by the Contractor and/or its subcontractor(s).
    3. Clearly designate which entity is to perform the work when the term, "work by others" or other similar phrases are indicated on the Contract Drawings before submission to the Design Consultant.
    4. Stamp submissions "Recommended for Acceptance", date and forward to the Design Consultant.
2. The Contractor shall promptly prepare and submit project specific layout detail and Shop Drawings of such parts of the work as are indicated in the Specifications, Schedule F of the Addendum or as required. These Shop Drawings shall be made in accordance with the Contract Drawings, Specifications and Supplementary Drawings, if any. The Shop Drawings shall be accurate and distinct and give all the dimensions required for the fabrication, erection and installation of the work.
3. Size of Drawings: The Shop Drawings, unless otherwise directed, shall be on sheets of the same size as the Contract Drawings, drawn accurately and of sufficient scale to be legible, with a one half (1/2) inch marginal space on each side and a two (2) inch marginal space for binding on the left side.



4. Scope of Drawings: Shop Drawings shall be numbered consecutively and shall accurately and distinctly represent all aspects of the work, including without limitation the following:
  - a. All working and erection dimensions.
  - b. Arrangements and sectional views.
  - c. Necessary details, including performance characteristics, and complete information for making necessary connections with other work.
  - d. Kinds of materials including thickness and finishes.
  - e. Identification of products.
  - f. Fabrication and installation drawings.
  - g. Roughing-in and setting diagrams.
  - h. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring.
  - i. Shop work manufacturing instructions.
  - j. Templates and patterns.
  - k. Schedules.
  - l. Design calculations.
  - m. Compliance with specified standards.
  - n. Notation of coordination requirements.
  - o. Notation of dimensions established by field measurement.
  - p. Relationship to adjoining construction clearly indicated.
  - q. Seal and signature of professional engineer if specified.
  - r. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
  - s. All other information necessary for the work and/or required by the Commissioner.
5. Titles and Reference: Shop Drawings shall be dated and contain:
  - a. Name of the Project, DDC Project Number and Contract Number.
  - b. The descriptive names of equipment, or materials covered by the Contract Drawings and the classified item number or numbers, if any, under which it is, or they are required.
  - c. The locations or points and sequence at which materials, or equipment, are to be installed in the work.
  - d. Cross references to the section number, detail number and paragraph number of the Contract Specifications.
  - e. Cross references to the sheet number, detail number, etc., of the Contract Drawings.
6. Field Measurements: In addition to the above requirements, the Shop Drawings shall be signed by the Contractor and, if applicable, the subcontractor responsible for preparation of the Shop Drawings. Each Shop Drawing shall be stamped with the following wording:

FIELD MEASUREMENTS: The Contractor certifies that it has verified and supplemented the Contract Drawings by taking all required field measurements, which said measurements correctly reflect all field conditions and that this Shop Drawing incorporates said measurements.
7. Contractor's Statement with Submittal: Any Submittal by the Contractor for acceptance, including without limitation, all dimensional drawings of equipment, blueprints, catalogues, models, samples and other data relative to the equipment, the materials, the work or any part thereof, must be accompanied by a statement that the Submittal has been examined by the Contractor and that everything shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If there is any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, the Contractor shall, in its statement, list and clearly describe each such discrepancy.

Acceptance will be given based upon the Contractor's representation that what is shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If



the Contractor's statement indicates any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, such change is subject to review and prior written acceptance by the Design Consultant. In addition, such change may require a change order in accordance with Article 25 of the Contract. In the event any such change is approved, any additional expense or increased cost in connection with the change is the sole responsibility of the Contractor.

8. Submission of Shop Drawings:

- a. Initial Submission: The Contractor shall submit seven (7) copies of each Shop Drawing to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Shop Drawings to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory Shop Drawing will be stamped "No Exceptions Taken", be dated and distributed by the Design Consultant as follows:
- 1) Two (2) copies thereof will be returned to the Contractor by letter.
  - 2) Three (3) copies of the approved Shop Drawing and copy of the transmittal letter to the Contractor will be forwarded to DDC.
  - 3) One copy will be retained by the Design Consultant.
  - 4) One copy will be forwarded / retained by sub-consultant(s) as appropriate.

Should the Shop Drawing(s) be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return the Shop Drawings to the Contractor with the necessary corrections and changes to be made as indicated thereon.

- b. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each shop drawing to the Design Consultant. The Contractor shall revise and resubmit the Shop Drawing as required by the Design Consultant until the Shop Drawings are stamped "No Exceptions Taken". However, Shop Drawings which have been stamped "Make Corrections Noted" shall be considered an "Acceptable" Shop Drawing and NEED NOT be resubmitted.
- c. Commencement of Work: No work or fabrication called for by the Shop Drawings shall be done until the acceptance of the said drawings by the Design Consultant is given. In addition to the foregoing Shop Drawing transmissions, a copy of any Shop Drawing prepared by any of the Contractor's subcontractors which Shop Drawing indicated work related to, adjacent to, impinging upon, or affecting work to be done by other subcontractors shall be transmitted to the subcontractors so affected. [These accepted Shop Drawings shall be distributed to the affected subcontractors when required with a copy of the transmittal to the Resident Engineer.]
- d. Variations: If the Shop Drawings show variations from the Contract requirements because of standard shop practice or other reasons, the Contractor shall make specific mention of such variations in its letter of submittal. Acceptance of the Shop Drawings shall constitute acceptance of the subject matter thereof only and not of any structural apparatus shown or indicated.

G. Product Data:

1. General: Except as otherwise prescribed herein, the submission, review and acceptance of Product Data and Catalogue cuts shall conform to the procedures specified in Sub-Section 1.6 F, Shop Drawings.
2. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
3. Mark each copy of each submittal to show which products and options are applicable.
4. Include the following information, as applicable:



- a. Manufacturer's written recommendations.
  - b. Manufacturer's product specifications.
  - c. Manufacturer's installation instructions.
  - d. Standard color charts.
  - e. Manufacturer's catalog cuts.
  - f. Wiring diagrams showing factory-installed wiring.
  - g. Printed performance curves.
  - h. Operational range diagrams.
  - i. Mill reports.
  - j. Standard product operation and maintenance manuals.
  - k. Compliance with specified referenced standards.
  - l. Testing by recognized testing agency.
  - m. Application of testing agency labels and seals.
  - n. Notation of coordination requirements.
5. Submit Product Data before or concurrent with Samples.
6. Submission of Product Data:
- a. Initial Submission: The Contractor shall submit seven (7) sets of Product Data to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Product Data to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory catalogue cut will be stamped "No Exception Taken", be dated and distributed as follows:
    - 1) Two (2) copies thereof will be returned to the Contractor by letter.
    - 2) Three (3) copies of the Product Data and copy of the transmittal letter to the Contractor will be forwarded to DDC
    - 3) One copy will be retained by the Design Consultant.
    - 4) One copy will be forwarded / retained by sub-consultant(s) as appropriate.Should the Product Data be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return one (1) set of such Product Data to the Contractor with the necessary corrections and changes to be made indicated and one (1) set to DDC.
7. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each Product Data for the review of the Design Consultant. The Contractor shall revise and resubmit the Product Data as required by the Design Consultant until the submission is stamped "No Exceptions Taken" by the Design Consultant. However, Product Data which has been stamped "Make Corrections Noted" shall be considered an "Accepted" Product Data and NEED NOT be resubmitted.
- H. Samples of Materials:
1. For samples of materials involving electrical work of any nature, refer to Section 00 35 06 - General Electrical Requirements.
  2. Samples shall be in triplicate, of sufficient size to show the quality, type, range of color, finish and texture of the material.
  3. Each of the samples shall be labeled as follows:
    - a. Name of the Project, DDC Project Number and Contract Number.
    - b. Name and quality of the material.
    - c. Date.

- d. Name of Contractor, subcontractor, manufacturer and supplier.
  - e. Related Specification or Contract Drawing reference to the samples submitted.
4. A letter of transmittal, in triplicate, from the Contractor requesting acceptance must accompany all such samples.
  5. Transportation charges to the Design Consultant's office must be prepaid on all samples forwarded.
  6. Samples for testing purposes shall be as required in the Specifications.
  7. Samples on Display: When samples are specified to be equal to approved product, they shall be carefully examined by the Contractor and by those whom the Contractor expects to employ for the furnishing of such materials.
  8. Timely Submissions Log/Schedule: Samples shall be submitted in accordance with approved Shop Drawing log so as to permit proper consideration without delaying any operation under the project. Materials should not be ordered until acceptance is received, in writing, from the Design Consultant. All materials shall be furnished equal in every respect to the accepted samples.
  9. The Acceptance of any samples will be given as promptly as possible, and shall be only for the characteristic color, texture, strength, or other feature of the material named in such approval, and no other. When this approval is issued by the Design Consultant, it is done with the distinct understanding that the materials to be furnished will fully and completely comply with the Specifications, the determination of which may be made at some later date by a laboratory test or by other procedure. Use of materials will be permitted only so long as the quality remains equal to the approved samples and complies in every respect with the Specifications, and the colors and textures of the samples on file in the office of the Design Consultant, for the project.
  10. Acceptability of test Data: The Commissioner will be the final judge as to acceptability of laboratory test data and performance in service of materials submitted.
  11. Valuable Samples: Valuable samples, such as hardware, plumbing and electrical fixtures, etc., not destroyed by inspection or test, will be returned to the Contractor and may be incorporated into the work after all questions of acceptability have been settled, providing suitable permanent records are made as to the location of the samples, their properties, etc.
  12. Equivalent Quality: Any material, article and/or equipment which is designated in the Drawings and/or Specifications by a number in the catalogue of any manufacturer or by a manufacturer's grade or trade name is designated for the purpose of describing the material, article and/or equipment and fixing the standard of performance and/or function, as well as the quality and/or finish. Any material, article and/or equipment which is other than what is specified in the Drawings and/or Specifications will only be accepted if the Commissioner makes a written determination that such material, article and/or equipment is equivalent to that which is specified in the Drawings and/or Specifications.
  13. The submission of any material, article and/or equipment as the equal of any material, article and/or equipment set forth in the Drawings and/or Specifications as a standard shall be accompanied by any and all information essential for determining whether such proposed material, article and/or equipment is equivalent to that which is specified. Such information shall include, without limitation, illustrations, drawings, descriptions, catalogues, records of tests, samples, as well as information regarding the finish, durability and satisfactory use of such proposed material, article and/or equipment under similar operating conditions.



**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.7**

**1.7 LEED SUBMITTALS:**

- A. Comply with submittal requirements specified in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL; Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS; Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS; Section 01 81 19, INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS and Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.
- B. LEED Building submittal information shall be assembled into one package per each applicable specification section, separate from all other non-LEED submittals. Each submittal package shall have a separate transmittal and identification as described in Sub-Section 1.6 herein.
- C. Number of Copies: Submit FOUR (4) copies of LEED submittals, in accordance with procedure described in Sub-Section 1.6 herein, unless otherwise indicated.
  - 1. LEED Submittals shall be clearly marked "LEED".
- D. Material Safety Data Sheets (MSDSs) for LEED Certification: Submit information necessary to show compliance with LEED certification requirements, which will be the limit of the Design Consultant's review for LEED compliance.
  - 1. Designated LEED submittals that include non-LEED MSDS data will not be reviewed. The entire submittal will be returned for re-submission.
- E. Product Cut Sheets and/or Shop Drawings for LEED Certification: Provide product cut sheets and/or shop drawings with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project. For detailed requirements refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.
  - 1. Provide the quantity, length, area, volume, weight, and/or cost of each product submitted as required to satisfy LEED documentation requirements. Refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.

**1.8 ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING:**

- A. In accordance with Section 01 10 00 Summary, Sub-Section 1.5 E, the Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel and Best Available Technology (BAT) in Non road Vehicles. Submission of such reports shall be in accordance with the schedule, format, directions and procedures established by the Commissioner.

**1.9 CONSTRUCTION PHOTOGRAPHS AND DVD RECORDINGS:**

- A. Submit construction progress photographs and DVD recordings in accordance with requirements of Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION

**1.10 AS-BUILT DOCUMENTS:**

- A. Submit all as-built documents in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 33 00**



**SECTION 01 35 03**  
**GENERAL MECHANICAL REQUIREMENTS**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 03**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. The General Mechanical Requirements contained herein shall be followed by the Contractor, as well as its subcontractor for HVAC work. This Section sets forth the General Requirements applicable to mechanical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.

**1.3 RELATED SECTIONS:** Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

**1.4 DEFINITIONS:**

- A. **CONCEALED PIPING AND DUCTS -:** shall mean piping and ducts hidden from sight in masonry or other construction, in floor fill, trenches, partitions, hung ceilings, furred spaces, pipe shafts and in service tunnels not used for passage. Where piping and ducts run in areas that have hung ceilings, such piping and ducts shall be installed in the hung ceilings. For work on existing piping any insulation on such existing piping is to be tested for asbestos and abated, if found to be positive by a certified asbestos contractor. Such testing and abatement shall occur prior to the performance of any work on these pipes.

**1.5 SUBMITTALS:**

- A. **INTENT OF MECHANICAL CONTRACT DRAWINGS –** Mechanical Contract Drawings are in part diagrammatic and show the general arrangement of the equipment, ducts and piping included in the Contract and the approximate size and location of the equipment.
- B. The Contractor shall follow these Contract Drawings in laying out the work and verify the spaces in which it will be installed. The Contractor shall submit, as directed, Mechanical Shop Drawings, roughing drawings, manufacturer's Shop Drawings, field drawings, cuts, bulletins, etc., of all materials, equipment and methods of installation shown or specified in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

1. Submit sheet metal shop standards. Submit manufacturer's product data including gauges, materials, types of joints, scaling materials and installations for metal ductwork materials and products.
2. Submit scaled layout drawing (3/8"=1') of metal ductwork and fittings including, but not limited to, duct sizes, locations, elevations, slopes of horizontal runs, wall and floor penetrations and connections. Show modifications of indicated requirements made to conform to local shop practice and how those modifications ensure that free area, materials and rigidity are not reduced. Layouts should include all the room plans, mechanical equipment rooms and penthouses. Method of attachment of duct hangers to building construction all with the support details. Coordinate shop drawings with related trades prior to submission.
3. Indicate duct fittings, particulars such as gauges, sizes, welds and configuration prior to start of work for low-pressure systems.
4. Submit maintenance data and parts lists for metal ductwork materials and products. Include this data, product data and shop drawings in maintenance manual.

#### **1.6 ACCESSIBILITY:**

All work shall be installed by the Contractor so as to be readily accessible for inspection, operation, maintenance and repair. Minor deviations from the arrangement indicated on the Contract Drawings may be made to accomplish this, but they shall not be made without approval by the Commissioner.

#### **1.7 CHANGES IN PIPING, DUCTS, AND EQUIPMENT:**

Wherever field conditions are such that for proper execution of the work, reasonable changes in location of piping, ducts and equipment are necessary and required, the Contractor shall make such changes as directed and approved, without extra cost to the City.

#### **1.8 CLEANING OF PIPING, DUCTS, AND EQUIPMENT:**

Piping, ducts and equipment shall be thoroughly cleaned by the Contractor of all dirt, cuttings and other foreign substances. Should any pipe, duct or other part of the several systems be obstructed by any foreign matter, the Contractor will be required to pay for disconnecting, cleaning and reconnecting wherever necessary for the purpose of locating and removing obstructions. The Contractor shall pay for repairs to other work damaged in the course of removing obstructions. For work on existing piping, ducts and equipment the Contractor shall pay special attention during this task so as not to disturb the insulation on such piping, ducts or equipment.

#### **1.9 STANDARDIZATION OF SIMILAR EQUIPMENT:**

Unless otherwise particularly specified, all equipment of the same kind, type or classification, and used for identical purposes, shall be the product of one (1) manufacturer.

#### **1.10 SUPPORTING STRUCTURES DESIGNED BY THE CONTRACTOR:**

Unless otherwise specified, supporting structures for equipment to be furnished by the Contractor shall be designed by an Engineer licensed in New York State retained by the Contractor. Supporting structures shall be built by the Contractor of sufficient strength to safely withstand all stresses to which they may be subjected, within permissible deflections, and shall meet the following standards:

- A. Structural Steel - ASTM Standard Specifications, AISC and New York City Construction Codes.

- B. Concrete for supports for equipment shall conform to the Specifications for concrete herein, but in no case shall be less than the requirements of the New York City Construction Codes for average concrete.
- C. Steel reinforcement for concrete shall be of intermediate grade and shall meet the requirements of the Standard Specifications for Billet Steel-Concrete Reinforcement Bars, ASTM.
- D. Drawings and calculations shall be submitted for review and acceptance in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

**1.11 ELIMINATION OF NOISE:**

- A. All systems and/or equipment provided under the Contract shall operate without objectionable noise or vibration.
- B. Should operation of any one or more of the several systems produce noise or vibration which is, in the opinion of the Commissioner, objectionable, the Contractor shall at its own expense make changes in piping, equipment, etc. and do all work necessary to eliminate objectionable noise or vibration.
- C. Should noise or vibration found objectionable by the Commissioner be transmitted by any pipe or portions of the structure from systems and/or equipment installed under the Contract, the Contractor shall at its own expense install such insulators and make such changes in or additions to the installations as may be necessary to prevent transmission of this noise or vibration.

**1.12 PRELIMINARY FIELD TEST:**

As soon as conditions permit, the Contractor shall furnish all necessary labor and materials for, and shall make, preliminary field tests of the equipment to ascertain compliance with the requirements of the Contract. If the preliminary field tests disclose equipment that does not comply with the Contract, the Contractor shall, prior to the acceptance test, make all changes, adjustments and replacements required.

**1.13 INSTRUCTIONS ON OPERATION:**

At the time the equipment is placed in permanent operation by the City, the Contractor shall make all adjustments and tests required by the Commissioner to prove that such equipment is in proper and satisfactory operating condition. The Contractor shall instruct the City's operating personnel on the proper maintenance and operation of the equipment for the period of time called for in the Specifications.

**1.14 CERTIFICATES:**

On completion of the work, the Contractor shall obtain certificates of inspection, approval, acceptance and of compliance with all laws from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES. The work shall not be deemed substantially complete until the certificates have been delivered.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 35 03**





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

**SECTION 01 35 06**  
**GENERAL ELECTRICAL REQUIREMENTS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section sets forth the General Requirements applicable to electrical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Project Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.
- B. This Section includes the following:
1. Procedure for Electrical Approval
  2. Submittals
  3. Electrical Installation Procedures
  4. Electrical Conduit System Including Boxes (Pull, Junction and Outlet)
  5. Electrical Wiring Devices
  6. Electrical Conductors and Terminations
  7. Circuit Protective Devices
  8. Distribution Centers
  9. Motors
  10. Motor Control Equipment
  11. Schedule of Electrical Equipment

**1.3 RELATED SECTIONS:** Include without limitation the following:

- |    |                  |                                 |
|----|------------------|---------------------------------|
| A. | Section 01 10 00 | SUMMARY                         |
| B. | Section 01 33 00 | SUBMITTAL PROCEDURES            |
| C. | Section 01 35 03 | GENERAL MECHANICAL REQUIREMENTS |
| D. | Section 01 42 00 | REFERENCES                      |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES             |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS       |

**1.4 DEFINITIONS:**

- A. **WIRING:** means both wire and raceway (rigid steel, heavy wall conduit unless specifically indicated otherwise).
- B. **POWER WIRING:** means wiring from a panel board or other specified source to a starter (if required) then to a disconnect (if required), then to the final point of usage such as a motor, unit or device.
- C. **CONTROL and/or INTERLOCK WIRING:** means that wiring that signals the device to operate or shut down in response to a signal from a remote control device such as a temperature, smoke, pressure, float,

etc. device (starters and disconnect switches are not included in this definition) regardless of the voltage required for the controlling device.

- D. **RIGID STEEL CONDUIT:** shall mean rigid steel, heavy wall conduit that is hot dipped galvanized inside and outside. The conduit shall meet the requirements of the latest edition, as amended, of the "Standard for Rigid Steel Conduit" of the Underwriters' Laboratories, Inc. Unless otherwise specified in the Specifications or indicated on the Contract Drawings, rigid steel conduit shall be used for all exposed work, for all underground conduits in contact with earth and for fire alarms systems, as required by the New York City Construction Codes.
- E. **ELECTRICAL METALLIC TUBING (EMT):** shall mean industry standard thin wall conduit of galvanized steel only. All elbows, bends, couplings and similar fittings which are installed as a part of the conduit system shall be compatible for use with electric metallic tubing. Couplings and terminating fittings shall be of the pressure type as approved by the Commissioner. Set screw fittings will not be acceptable. EMT shall meet the requirements of the latest edition, as amended, of the "Standard for Electrical Metallic Tubing of the Underwriters Laboratories Inc." EMT may only be used where specifically indicated. In no case will EMT be permitted in spaces other than hung ceilings and dry wall partitions.
- F. **FLEXIBLE METALLIC CONDUIT (FMC):** Shall mean a conduit made through the coiling of a self-interlocking ribbed strip of aluminum or steel, forming a hollow tube through which wires can be pulled. For final connections to motors and motorized equipment, not more than a 4' - 0" length of flexible conduit may be used. For watertight installations, this conduit shall be of a watertight type, attached with watertight glands or fittings for final connections from outlet box to recessed lighting fixtures and in locations only where specifically permitted by the Specifications or Contract Drawings.

#### 1.5 PROCEDURE FOR ELECTRICAL APPROVAL:

This Sub-Section sets forth General Electrical information, as well as required approvals for all electrical work required for the Project, including ancillary electrical work which may be included in the work of other trade subcontractors.

- A. **ELECTRIC SERVICE:** The electric service supply is subject to commercial and operating variation of the utility company. Proper provision shall be made to have all apparatus operate normally under these conditions.
- B. **ACCEPTANCE:** Acceptance and approval of the work will be contingent upon the inspection and test of the installation by the City regulatory agency.
- C. **TESTS:** The Contractor shall notify the Commissioner when the Contractor has completed the work and is ready to have it inspected and tested. Upon completion of the work tests shall be made as required by the Commissioner of all electrical materials, electrical and associated mechanical equipment, and of appliances installed hereunder. The Contractor shall furnish all labor and material for such tests. Should the tests show that any of the material, appliances or workmanship is not first class or not in compliance with the Contract, the Contractor on written notice shall remove and promptly replace them with other materials in conformity with the Contract.
- D. **CERTIFICATE OF THE BUREAU OF ELECTRICAL CONTROL, OF THE DEPARTMENT OF BUILDINGS (B.E.C.):** The Contractor must file prior to requesting a substantial completion inspection a Certificate of Inspection issued by B.E.C. On completion of the work the Contractor shall obtain certificates of inspection, approval, acceptance and compliance from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES.
- E. **RESPONSIBILITY FOR CARE AND PROTECTION OF EQUIPMENT:**
  - 1. The Contractor furnishing any equipment shall be responsible for the equipment until it has been finally inspected, tested and accepted, in accordance with the requirements of the Contract.



2. After delivery and before and after installation, the Contractor shall protect all equipment against theft, injury or damage from all causes. The Contractor shall carefully store all equipment received for work, which is not immediately installed. If any equipment has been subject to possible injury by water, it shall be thoroughly dried out and put through a special dielectric test as directed by the Commissioner, at the expense of the Contractor or replaced by the Contractor without additional cost to the City.

- F. **UNIFORMITY OF EQUIPMENT:** Any two (2) or more pieces of equipment, apparatus or materials of the same kind, type or classification which are intended to be used for identical types of service, shall be made by the same manufacturer.

#### 1.6 SUBMITTALS:

A. **CONTRACTOR'S ELECTRICAL DRAWINGS AND SAMPLES FOR APPROVAL:**

1. The Contractor shall submit to the Commissioner for approval, in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, complete dimensional drawings of all equipment, wiring diagrams, motor test data, details of control, installation layouts showing all details and locations and including all schedules, and descriptions and supplementary data to comprise complete working drawings and instructions for the performance of the work. A description of the operation of the equipment and controls shall be included. A letter, in triplicate, shall accompany each submittal.
2. The Contractor shall submit in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, duplicate samples of such materials and appliances as may be requested by the Commissioner for approval. These samples shall be properly tagged for identification and submitted for examination and test. After the samples are approved, one (1) sample will be returned to the Contractor and the other sample will be filed in the office of the Commissioner's representative for inspection use. After the Contract is completed, the second set of samples will be returned to the Contractor.

- B. **TIMELINESS:** All material shall be submitted in accordance with the submittal schedule in sufficient time for the progress of construction. Failure to promptly submit acceptable samples and dimensional drawings of equipment will not be accepted as grounds for an extension of time. The Commissioner may decline to consider submittals unless all related items are submitted at the same time.

- C. **CONTRACTOR'S STATEMENT WITH SUBMITTALS:** Contractor shall submit statement in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.

- D. **BULLETINS AND INSTRUCTIONS:** The Contractor shall furnish and deliver to the Commissioner in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS and Section 01 77 00, CLOSEOUT PROCEDURES, after acceptance of the work, four (4) complete sets of instructions, technical bulletins and any other printed matter (diagrams, prints, or drawings) required to provide complete information for the proper operation, maintenance and repair of the equipment and the ordering of spare parts.

#### PART II – PRODUCTS (Not Used)

## PART III – EXECUTION

### 3.1 ELECTRICAL INSTALLATION PROCEDURES:

This Sub-Section sets forth the General Installation Procedure that shall apply to all electrical work and electrical equipment appearing in the Contract.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

- A. **INTENT OF CONTRACT DOCUMENTS:** The Drawings and Specifications are to be interpreted as a means of conveying the scope and intent of the work without giving every minor electrical detail. It is intended, nevertheless, that the Contractor shall provide whatever labor and materials are found necessary, within the scope of the Contract, for the successful operation of the installation. Specific details of individual installations are to be finally decided upon when the Contractor submits Working or Shop Drawings for approval to DDC. Whenever there are two (2) or more methods to complete project work within the Contract scope, the Commissioner reserves the right to choose that method which, in the Commissioner's opinion, will afford the most satisfactory performance, lasting qualities, and accessibility for repairs, even though this selection is the most costly.
- B. **SCHEMATIC PLANS – APPROXIMATE LOCATIONS:** Conduits and wiring are shown on the plans for diagrammatic purposes only. Therefore, conduit layouts may not necessarily give the actual physical route of the conduits. The Contractor who installs a conduit system will also be required, as part of the work, to furnish and install all hangers and pull-boxes, including any special pull-boxes found necessary to overcome interferences, and to facilitate the pulling of electrical cables. Similarly, the locations of equipment, appliances, outlets and other items shown on Contract Drawings are only approximate and are to be definitively established when equipment Shop Drawings are submitted and approved by DDC during construction.
- C. **SLEEVES:** required for conduits passing through walls or floors, shall be furnished and set by the Contractor installing the conduits. Sleeves in waterproofed floors shall be provided with flashing extending 12 inches in all directions from sleeve and secured to waterproofing. Flashing shall be turned down into space between pipe and sleeve and caulked watertight. Flashing shall be 20 oz. cold rolled copper. Sleeves shall be supplied with welded flanges similar to those supplied by the subcontractor for Plumbing Work and shall extend one (1) inch above finished floor.
- D. **COORDINATION:** The Contractor shall keep in close touch with the construction progress and obtain the necessary information for the accurate placement of its work in ample time before project construction operations obstruct its work. The Contractor is to consult all other Contract Drawings, as well as approved equipment Shop Drawings on file in the Resident Engineer's Field Office. This will aid in avoiding interferences, omissions and errors in the electrical installation.
- E. **RESTORATION:** If drilling or cutting is done on finished surfaces of equipment or the structure, any marring of the surface shall be repaired or replaced by the Contractor. The Contractor shall be held responsible for corrective restoration due to its cutting or drilling, and for any damage to the project or its contents caused by the Contractor or the Contractor's workers. If any piercing of waterproofing occurs because of the installation of the work, the Contractor shall restore the waterproofing, at its own expense, to the satisfaction of the Commissioner.
- F. **ELECTRICAL WORK AT SITE:** The Contractor furnishing equipment consisting of a number of related electrical devices or appliances, mounted in a single enclosure, or on a common base, shall furnish this unit complete with internal wiring, connections, terminal boxes with copper connectors and/or lugs and ample electrical leads, ready for connection and operation. The cost of any wiring, re-wiring or other work required to be done on this unit in the field, shall be borne by the Contractor, without additional cost to the City.
- G. **COOPERATION AMONG SUBCONTRACTORS:** Whenever an electrically operated unit or system involves the combined work of several subcontractors for its installation and successful operation, the

Contractor shall require each subcontractor to exercise the utmost diligence in cooperating with others to produce a complete, harmonious installation.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2**

**3.2 ELECTRICAL CONDUIT SYSTEM INCLUDING BOXES (PULL, JUNCTION AND OUTLET):**

This Sub-Section sets forth the requirements applying to the installation of electrical conduits, boxes or fittings. Rigid steel conduit shall be used throughout, unless otherwise directed by the Commissioner. Where the word 'conduit', without a modifier such as, rigid steel, EMT, etc., is specified to be used, it shall be interpreted to mean, rigid steel, heavy wall, threaded conduit.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

**A. INSTALLATIONS AND APPLICATIONS:**

1. Unless otherwise specified or indicated on the Contract Drawings, conduit runs shall be installed concealed in finished spaces.
2. **CONDUIT SIZES:** The sizes of conduit shall be as indicated on the Contract Drawings. Wherever conduit sizes are not indicated, the conduit shall meet the requirements of the New York City Electrical Code to accommodate the conductors to be installed therein.
3. Conduits shall be reamed smooth after cutting. No running threads will be permitted. Universal type couplings shall be used where required. Conduit joints shall be screwed up to butt. Empty conduits after installation shall have all open ends temporarily plugged to prevent the entrance of water or other foreign matter.
4. Conduits being installed in concrete or masonry shall be securely held in place during pouring and construction operations. A group of conduits terminating together shall be held in place by a template.
5. **UNDERGROUND STEEL CONDUITS:** Unless otherwise specified, all underground steel conduits in contact with earth shall be encased by the Contractor who installs them, in a covering of not less than two (2) inches of an approved concrete mixture. Concrete mix shall be one (1) part cement to four and one-half (4 ½) parts of fine and coarse aggregate.
6. **EXCAVATION RESTORATION PERMITS:** When installing underground conduits, duct banks or manholes the Contractor shall perform the work of cutting pavement, excavation shoring, keeping trenches or holes pumped dry, backfilling, restoration of surfaces to original condition and removal of excess earth and rubbish from premises. During the work, the Contractor shall provide adequate crossovers, protective barriers, lamps, flags, etc., to safeguard traffic and the public. When the work is in a public highway or street, the Contractor shall secure and pay for all necessary permits and inspection fees and pay the cost of repaving.
7. **EXPOSED CONDUIT SUPPORTS:** Exposed conduit shall be supported by Galvanized hangers with necessary inserts, beam clamps of approved design or attached to walls or ceilings by expansion bolts. Exposed conduits shall be supported or fastened at intervals not more than five (5) feet.
8. Exposed conduit shall be installed parallel or at right angles to ceiling, walls and partitions. Where direction changes of exposed conduit cannot be made with neat bends, such as required around beams or columns, conduit type fitting shall be used.



9. The conduit shall be installed with an approved expansion joint:
  - a. Wherever the conduit crosses a building expansion joint the Contractor will be held responsible for determining where the building expansion joints are located.
  - b. Every 200 feet, when in straight runs of 200 feet or longer.
10. Conduit may only enter and leave a floating slab in the vertical direction, and then only in an approved manner. Horizontal entries into floating slabs are not permitted.
11. Conduit installed in pipe shafts shall be properly supported to carry the total weight of the raceway system complete with cable. In addition at least one (1) horizontal brace per 10 ft. section shall be provided to assure stability of the raceway system.
12. BUSHINGS AND LOCKNUTS: Approved bushings and locknuts shall be used wherever conduits enter outlet boxes, switch boxes, pull boxes, panel board cabinets, etc.
13. CONDUIT BENDS: shall be made without kinking conduit or appreciably reducing the internal diameter. All bends in conduit of two (2) inch in diameter or larger shall be made with an hydraulic or power pipe bender. The radius of the inner edge of any bend shall not be less than six (6) times the internal diameter of the conduit where rubber covered conductors are to be installed, and not less than 10 times the internal diameter of the conduit where lead covered conductors are to be used. Long gradual sweeps will be required, rather than sharp bends, when changes of direction are necessary.
14. EMPTY CONDUITS
  - a. TESTS: All conduits and ducts required to be installed and left empty shall be tested for clear bore and correct installation by the Contractor using a ball mandrel and a brush and snake before the installation will be accepted. The ball shall be turned to approximately 85% of the internal diameter of the raceway to be tested. Two (2) short wire brushes shall be included in the mandrel assembly. Snaking of conduits, ducts, etc., shall be performed by the Contractor in the presence of the Resident Engineer. Any conduits or ducts which reject the mandrel shall be cleared at once with the Contractor bearing all costs, such as chopping concrete, to replace the defective conduit and restore the surface to its original condition.
  - b. TAGS: Numbers or letters shall be assigned to the various conduit runs, and as they test clear they shall be identified by a fiber tag not less than 1-1/4 inch width, attached by means of a nylon cord. All conduit terminations in panel, splice or pull boxes as well as those out of the floor or ceiling shall be tagged.
  - c. TEST RECORDS: As the conduit runs clear, a record shall be kept under the heading of "Empty Conduit Tested, Left Clear, Tagged and Capped" showing conduit designation, diameter, location, date tested and by whom. When complete, this record shall be signed by the Resident Engineer and submitted in triplicate for approval. This record shall be entered on the Contract Record Drawings under Section 01 78 39, CONTRACT RECORD DOCUMENTS.
  - d. CAPPING: All empty conduit and duct openings, after test, shall be capped or plugged by the Contractor as directed.
  - e. DRAG LINES: A drag line shall be left in all empty conduit.

**B. BOXES:**

1. The Contractor shall furnish and erect all pull boxes indicated on the plans or where required. Sides, top and bottom of pull boxes shall be Galvanized coated and shall be built of No. 12 USSG steel reinforced at corners by substantial angle irons and riveted or welded to plates. Bottom or side

of pull boxes shall be removable and held in place by corrosion resistant machine screws. Pull boxes in damp locations shall have threaded hubs and gaskets and be NEMA 4X. All pull boxes shall be suspended from ceiling or walls in the most substantial manner.

2. In centering outlets, the Contractor is cautioned to allow for overhead pipes, ducts and other obstructions, and for variations in arrangement and thickness of fireproofing, soundproofing and plastering. Precaution should be exercised regarding the location of window and door trims, paneling, etc. Mistakes resulting from failure to exercise precaution must be corrected by the Contractor at no additional cost to the City. Outlets in hung ceilings shall be supported from the black iron or structure.
3. The exact location of all outlets in finished rooms shall be as directed. When the interior finish has been applied, the Contractor shall make any necessary adjustment of its work to properly center the outlets. All outlet boxes for local switches near doors shall be located at the strike side of doors as finally hung, whether so indicated on the drawings or not.
4. Exposed wall outlet boxes shall be erected neatly and tight against the walls and securely anchored to same.
5. All wall outlets of each type shall be set accurately at the same level on each floor, except where otherwise specified or directed. Where special conditions occur, outlets shall be located as directed.
6. MOUNTING HEIGHTS: The following heights are standard heights and are subject to correction due to coordination with Contract Drawings. All such changes must be approved by the Resident Engineer. Heights given are from finished floor to center line of outlet or device on wall or partition, unless otherwise indicated.
 

a. General Convenience Outlets (mount vertical)	1'-6"
b. Clock Outlets	8'-6" or 1'-6" below ceiling
c. Wall Lighting Switches	4'-0"
d. Motor Controllers	5'-0"
e. Motor Push-button	4'-2"
f. Telephone Outlets	As Directed
g. Fire Alarm Bells	8'-6" or 1'-6" below ceiling
h. Fire Alarm Stations	4'-0"
i. Intercom Outlet	1'-6"
j. Cooking and Refrigerator Unit	As Directed
7. Outlet boxes shall be of approved design and construction; of form and dimensions suited and adapted to its specific location; the kind of fixture to be used and the number and arrangements of conduits, etc., connecting therewith. All ferrous outlet boxes shall meet the requirements for zinc coating as specified under Electrical Conduit Systems.
8. There shall be knockouts opened only for the insertion of conduit. Any outlet boxes with more openings than are necessary for conduit insertion shall be sealed by the Contractor without additional charge.
9. All outlet boxes and junction boxes for exposed work shall be galvanized cast iron or cast aluminum with threaded openings. Outlet boxes for exposed inside work in damp locations shall be galvanized cast iron or cast aluminum with threaded hubs and neoprene gaskets.
10. Junction boxes shall not be less than 4 11/16" square and shall be equipped with zinc coated plates. Where plates are exposed they shall be finished to match the room decor.





11. **FIXTURE SUPPORTS:** Outlet boxes supporting lighting fixtures shall be equipped with fixture studs held by approved galvanized stove bolts or integral with the box. Cast iron or malleable boxes shall have four (4) tapped holes for mounting required cover or fixtures.
12. Outlet boxes exposed to the weather or indicated W.P. shall be cast iron or cast aluminum and the covers made watertight with neoprene gaskets. The boxes shall have external lugs for mounting. Drilling of the body of the fitting for mounting will not be permitted. The cover screws shall be appropriate in size, non-corrodible and not less than four (4) in number for each box opening.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3**

**3.3 ELECTRICAL WIRING DEVICES:**

- A. **WALL SWITCHES** shall be of the best specification grade, quiet type, and shall have a rating of 20 Amperes at 277 volts, as manufactured by Bryant, Hubbell or approved equal. The mechanism shall be equipped with arc snuffers. They shall be of the tumbler type, single pole. Switches of the 3-way type shall have a similar rating.
- B. **RECEPTACLES:**
  1. **CONVENIENCE OUTLETS:** shall be of the best specification grade, duplex, two-pole, 3-wire, 20 Amperes at 125 volts. It shall have a grounding pole that shall be grounded to the conduit system. Receptacles shall be capable of both back and side wiring and shall have only one (1) grounding screw. Receptacles shall be Hubbell Cat. #5262 or approved equal.
  2. **HEAVY DUTY RECEPTACLE OUTLETS:** shall have the Ampere rating and the number of poles specified on the Contract Drawings and shall be Hubbell, Russell-Stoll, Bryant, AH & H or approved equal. Each outlet shall have a grounding pole, which shall be grounded to the conduit system.
  3. **FLOOR RECEPTACLES:** shall be Russell & Stoll #3040 or approved equal, to fit into floor box previously specified.
  4. **NAMEPLATES:** are required for all receptacles other than 120V.
- C. **CLOCK HANGERS:** Clock outlets for surface type clocks shall be equipped with a supporting hook and recessed faceplate to conceal the electrical cord.
- D. **WATERTIGHT DEVICES:** For installations exposed to weather or in damp locations, the devices shall be in a gasketed, cast iron enclosure.
- E. **PLATES:**
  1. Every convenience outlet and switch outlet shall be covered by means of a stainless steel No. 302 - 0.4" antimagnetic plate with an approved finish, unless provided otherwise in the detailed Specifications.
  2. Where two (2) or three (3) switches are grouped together, a single faceplate shall be used. Where more than three (3) switches are located at one (1) point, the faceplates may be made up in multiple units.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4**

**3.4 ELECTRICAL CONDUCTORS AND TERMINATIONS:**

- A. **CONDUCTORS FOR LIGHT AND POWER** - All wire and cable shall be of annealed copper of 98% conductivity. Aluminum wire or cable will not be permitted. The insulation shall be flame retardant, moisture and heat resistant, thermoplastic, type THW or THWN rated for 600 volts at 75 degrees C. for



both wet and dry locations. Wires No. 8 or larger shall be stranded. Wires and cables shall also be subject to the requirements of the NYCEC. Cables for incoming service or wire in conduits contiguous with the earth or in concrete or other damp or wet locations shall be synthetic rubber insulated with neoprene jacket, heat and moisture resistant and shall be equal to UL Type USE and rated for 600 volts at 75 degrees C. for both wet and dry locations.

- B. **FIXTURE WIRE:** Lighting fixtures shall be wired with No. 14 gauge wire designated as AWM and rated at 105 degrees C.
- C. **OTHER TYPES:** Cables and wires for interior communication systems are described in applicable detailed Specifications.
- D. **MINIMUM SIZE:** Conductors smaller than No. 12 AWG shall not be used for light or power.
- E. **COLOR CODE:** Wires shall have a phase color code, and multiple conductor cables shall be color coded.
- F. **CABLE DATA:** The Contractor shall submit for approval the following information for each size and type of cable to be furnished.
  - 1. Manufacture of Cable - Location of Plant.
  - 2. Minimum insulation resistance at standard test temperature.
  - 3. Days required for delivery to site of work after order to proceed with manufacture.
- G. **ORIGINAL REELS:** Cable and wire shall be delivered to the site of the work on original sealed factory reels.
- H. **WIRE INSTALLATION:**
  - 1. **INSTALL WIRES AFTER PLASTERING** - Feeder and branch circuits wiring shall not be installed in conduit before the rough plastering work is completed. No conductors shall be pulled into floor conduits before floor is poured.
  - 2. **CONDUIT SECURED IN PLACE** - No conductor shall be pulled into any conduit run before all joints are made up tightly and the entire run rigidly secured in place.
  - 3. **WIRE ENDS** - All wires shall be left with sufficiently long ends for proper connection and stowing.
  - 4. **PULLING COMPOUNDS** - When required to ease the pulling-in of wires into conduit, only approved compounds as recommended by cable manufacturers shall be used.
  - 5. **PRESSURE CONNECTORS** - for wires shall be of the cast copper or forged copper pressure plate type. Connectors shall be O.Z., Burndy, National Electric Products or approved equal.
  - 6. Splices and feeder taps in the gutters of panel boxes shall be made by means of pressure plate type connectors encased in composition covers as manufactured by O.Z., Burndy, National Electric Products or approved equal.
  - 7. Splices in branch wiring for sound systems and fire systems, shall be first made mechanically secure, then soldered and taped.
  - 8. In lieu of soldered splices (except for sound and Fire Systems, which must have soldered splices) the following alternates are acceptable for operating temperatures up to 105 degrees C., for fluorescent fixtures and for the splicing of branch circuit wiring up to No. 8 AWG wire:
    - a. Mechanical splices made with mechanical connectors as manufactured by the Minnesota Manufacturing Company "Scotchlock" or approved equal. Mechanical connectors requiring a special tool (pressure connectors, insulators and locking rings) by Buchanan or approved equal. The tool used for connector application shall be as approved by the connector manufacturer.



- b. For wire and cable No. 6 AWG and larger for branch circuit wiring the seamless tubular connector will only be accepted. Application of this connector shall be with a tool recommended by the connector manufacturer.
9. TAGS: All feeders and risers shall be tagged at both ends, and in all pull and junction boxes and gutter spaces through which they pass. Such tags shall be of fiber and have the feeder designation and size stamped thereon.
10. BRANCH CIRCUIT WIRING:
  - a. The Contractor installing branch circuit wiring shall test the work for correct connections and leave all loop splices in the fixture outlet boxes properly spliced and taped. The Contractor shall provide wire ends long enough for convenient connection to device.
  - b. NEUTRALS: No common neutrals shall be used except for lighting branch circuits. Each neutral wire shall be terminated separately on a neutral busbar in the panelboard. No common neutrals will be permitted for convenience receptacle branch circuits.

#### I. TERMINATIONS

1. LUGS: All lugs for all devices and all cable terminations shall be copper. AL/CU rated lugs will not be permitted. The only exception to this requirement is when the particular device is not manufactured with copper lugs by any manufacturer. Lugs for No. 6 AWG cable and larger shall be cast copper or forged copper pressure plate type. Lugs for 1/0 and larger shall be fastened with two (2) bolts.
2. All lugs shall be of the proper size to accept the cable connected to them. Any subcontractor furnishing a device containing lugs is to coordinate with the Contractor to insure that the device terminations are adequate for the wire or cable (whose size may be larger than expected due to voltage drop considerations) connected to the device.

<b>REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5</b>
---

### 3.5 CIRCUIT PROTECTIVE DEVICES:

This Section sets forth the circuit protective devices such as circuit breakers and safety switches, used in connection with Motor Control Equipment, Distribution Centers, Panel boards and Service Entrance.

#### A. CIRCUIT BREAKERS:

1. CIRCUIT BREAKERS: shall be operable in any position and shall be of the quick-make, quick-break type on manual operation. The handle shall be trip free, preventing contacts from being held in closed position against abnormal overloads or short circuits. Positive visual indication of automatic tripped position of breaker shall be provided, in addition to the "On" and "Off" indication. All circuit breakers shall be of the bolted type.
2. TRIP RATING: Circuit breakers shall be provided with the required number of trip elements, calibrated at 40 degrees C., ambient temperature, in accordance with wire sizes or motor currents as shown on Contract Drawings or indicated in the Specifications.
3. POLE BARRIER: Multipole pole breakers shall be designed to break all poles simultaneously. They shall be provided with barriers between poles and arc suppressing devices.
4. ELEMENTS: Multipole circuit breakers shall have frames of not less than a 100 Ampere rating. Multipole circuit breakers for 480 volts AC operation shall have an NEMA interrupting rating of 18,000 Amperes, unless a higher rating is specified in the Specific Requirements or indicated on the Contract Drawings.



5. For circuit breakers with frame size up to and including 225 Amperes, the breakers may be provided with non-interchangeable trip elements. For frame ratings above 225 Amperes, the breakers shall be provided with interchangeable trip elements, which can be replaced readily.
6. Single pole circuit breakers for branch circuits shall have a frame size of no less than 100 Amperes, and shall be rated at 125 volt A.C. with a NEMA interrupting rating of 10,000 Amperes, unless a higher rating is specified in the Specifications or indicated on the Contract Drawings.
7. **INVERSE TIME ACTION:** The circuit breakers shall be dual element type, one (1) element with time limit characteristics, so that tripping will be prevented on momentary overloads, but will occur before dangerous values are reached and the other with instantaneous trip action. Inverse time delay action shall be effective between a minimum tripping point of 125% of rating of breaker and an instantaneous tripping point between 600% and 700% of rated current.
8. **CONSTANCY OF CALIBRATION:** The tripping elements shall insure constant calibration and be capable of withstanding excessive short circuit conditions without injury.
9. **CONTACTS:** shall be non-welding under operating conditions and of the silver to silver type.
10. **TEMPERATURE RISE:** Current carrying parts, except thermal elements, shall not rise in temperature in excess of 30 degrees C. while carrying rated current at rated frequency.
11. **NUMBERING:** Each circuit breaker shall be distinctly numbered when installed in a group with other breakers. The calibration of trip element shall be indicated on each breaker.

**B. SAFETY SWITCHES:**

**NEMA TYPE HD:** When safety switches are permitted to be used for service entrance, motor disconnecting means or to control other types of electrical equipment, they shall be of the type HD of a rating not less than 30 Amperes. Enclosures shall be provided with means for locking. For ratings above 60 Amperes terminals shall have double studs.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.6**

**3.6 DISTRIBUTION CENTERS:**

This Section sets forth the construction and installation procedure for Switchboards, Panel boards and Cabinets.

- A. **PANELBOARDS-GENERAL TYPE:** The panel boards shall be of the automatic circuit breaker type with individual breakers for each circuit, removable without disturbing the other units. Circuit breakers shall be in accordance with the requirements outlined under "Circuit Protective Devices."
- B. **NUMBER AND RATING OF CIRCUIT BREAKERS:** The Contract Drawings show a layout of each panel, giving the number, frame, size and trip setting of circuit breakers and number of branch circuits and spare breakers. Each branch circuit shall be distinctly numbered.
- C. **BUS-BAR CONSTRUCTION AND SUPPORT:** Panel Boards shall be of the dead front type and shall have bus bars and branch circuits designed to suit the system and voltage. Current carrying parts, exclusive of circuit breakers shall be copper and based on a maximum density of 1,000 Amperes per square inch. Bus bars for the main switchboard shall be designed for the frame rating of the Service Breaker. Bus bars shall run up the center of the panel, unless otherwise indicated, and shall have connected thereto the various branch circuits. Unless otherwise specified, bus bars for each panel board shall be equipped with main lugs only and capacity as required on Contract Drawings. Where main protection is required, automatic circuit breakers shall be used. A neutral bus of at least the same capacity as a live bus bar shall be provided for the connection of all neutral conductors. Each terminal shall be identified. All current carrying parts, exclusive of circuit breakers, shall be of copper with a minimum number of joints. The bus bar structure shall be a self-supporting unit, firmly fastened to a 1/2



- inch plastic board, extending the full length and width of assembly which shall serve to insulate the bus structure from the back of panel box. Other methods affording equally effective bus structure support and insulation will be given consideration. An insulating barrier shall separate neutral bus from other parts of panel.
- D. **CIRCUIT BREAKER ASSEMBLY:** The entire circuit breaker and bus bar assembly shall be mounted on an adjustable metal base or pan and secured to the back of panel box. The panel shall have edges flanged for rigidity.
- E. **PANEL MOUNTING:** The panel shall be centered in the panel box to line up with door openings and set level and plumb so that no live parts are exposed with the door open.
- F. **PANEL CABINET:**
1. **PANEL CABINET INSTALLATION:** When installed surface mounted in panel closets they shall be mounted on Kindorf channel.
  2. Where cabinets cannot be set entirely flush due to shallow walls or partitions or where cabinet is extra deep, the protruding sides of cabinet shall be trimmed with a metal or hardwood return molding of approved design and fastened to cabinet so as to conceal the intersection between the wall and cabinet.
- G. **NAMEPLATES:** Nameplates where required, shall be made of engraved Lamicoid sheet, or approved equal. Letters and numbers shall be engraved white on a black background (except for Firehouse projects which shall have white letters on a red background). The Contractor shall submit an engraved sample for approval as to design and style of lettering before proceeding with the manufacture of the nameplate. Nameplates shall be of suitable size and shall also be provided at the top of the switchboard or section thereof and on the trim at the top of all lighting and power panels. Similar nameplates shall also be provided for each distribution circuit breaker giving the breaker number, the number of the feeder and the name of the equipment fed.
- H. **SHOP DRAWINGS:** showing all details of boxes, panels, etc., shall be submitted for approval.
- I. **DIRECTORIES:** A directory shall be fastened with brass screws and consist of a noncorrosive metal frame with dimensions not less than five (5) inches x eight (8) inches and a transparent window of Plasticile, Plexiglass, Lucite, Polycarbonate or approved equal that is not less than 1/16 inch thick over cardboard or heavy paper. The directory shall be typewritten and show the number of each circuit, the name of circuit and lighting or equipment supplied. The size of riser feeder shall be as indicated on directory. The dimensions of directory shall be submitted for approval for each size of panel.
- J. **CONSTRUCTION**
1. **FINISH:** Panel boxes, doors and trim for installation in dry locations, shall be zinc coated after fabrication by the hot-dip galvanizing or electroplate process on inside and outside surfaces. In damp locations, panel boards shall be enclosed and gasketed NEMA 3R type. Panel boards located outdoors or exposed to the weather shall be NEMA 3X type.
  2. **PAINTING:** Panel boxes, doors and trim shall receive a coat of approved priming paint and a second coat of approved paint in the field after installation. Paint shall be applied to the inside and outside of boxes and on both sides of trim. Panel trims and doors shall receive a third or finishing coat on the outside after installation. Approval as to texture and color must be obtained before the final coat is applied.



**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.7**

**3.7 MOTORS:**

This Section sets forth the general design, construction and performance requirements, which shall apply to all motors furnished in the Contract.

- A. **MOTOR DESIGN:** All motors shall be designed to comply with the New York State Energy Conservation Construction Code and the New York City Energy Conservation Code. In the event of any conflict or inconsistency between such codes, the New York City Energy Conservation Code shall prevail. Motors shall have standard NEMA frames and shall have nameplate ratings adequate to meet the specified conditions of operation. Motor performance under variable conditions of voltage and frequency shall be within the limits set in NEMA standards, unless modified in the Specifications. Motors shall be expressly designed for the hazard duty load, voltage and frequency as specified in the Contract. All motor windings shall be copper. All motors intended to operate on a 208 volt system shall be designed and rated for 200 volts.
- B. **STANDARDS OF COMPARISON:** In the absence of specific motor specifications, in general, the best standard products of the leading motor manufacturers shall be considered as a standard for comparison. The requirements of the NEMA standards for motors and generators shall be deemed to contain the minimum requirements of performance and design.
- C. **OBJECTIONABLE NOISES:** Objectionable noises will not be tolerated and exceptionally quiet motors may be required for certain specified locations. Noise control tests as per the New York City Construction Codes may be performed as directed by the Commissioner. Such motors shall bear a nameplate lettered "Quiet Motor." Springs and slip rings shall be of approved non-ferrous material.
- D. **BEARINGS:**
1. Bearings, unless specified otherwise, shall be of the ball or roller type. Motors one (1) horsepower and larger that are equipped with ball roller bearings shall also have lubrication of the pressure-relief greasing type. The Contractor furnishing four (4) or more such motors shall also furnish, as part of the Contract, a pressure grease gun of rugged design, of approximately 10 ounce capacity, complete with necessary adapters. The Contractor shall also provide 10 pounds of approved gun grease.
  2. For any particular unit where sleeve bearings are deemed desirable, permission for their use may be granted by the Commissioner. Motors one (1) horsepower and larger that are equipped with sleeve type bearings shall in addition to having protected accessible fittings for oiling be provided with visible means for determining normal oil level. Lubrication shall be positive, automatic and continuous.
- E. **MOTOR TERMINALS AND BOXES:** Each motor shall be furnished with flexible leads of sufficient length to extend for a distance of not less than three (3) inches beyond the face of the conduit terminal box. This box shall be furnished of ample size to make and house motor connections. These requirements shall be met irrespective of any other standards or practices. Size of cable terminals and conduit terminal box holes shall be subject to approval. For motors five (5) horsepower or larger, each terminal shall come with two (2) cast or forged copper pressure type connectors with bolts, nuts and washers. For motors of smaller ratings, connectors of other acceptable types may be furnished. For installations exposed to the weather or moist locations, terminal boxes shall be of cast iron with threaded hubs and gasketed covers. Cover screws shall be of non-corrosive material.
- F. **MOTOR TEMPERATURE RISES:** The motor nameplate temperature rises for the various types of motor enclosures shall be as listed below:
1. Open Frame 40 degrees C.
  2. Totally enclosed and enclosed fan cooled 55 degrees C.



3. Explosion proof and submersible 55 degrees C.
4. Partially enclosed and drip proof 40 degrees C.

The temperature of the various parts of a motor shall meet the requirements of NEMA standards for the size and type of the motors. Tests for heating shall be made by loading the motor to its rated horsepower and keeping it so loaded for the rated time interval or until the temperature becomes constant.

- G. SPECIAL CODE INSTALLATIONS: Electrical installations covered by special publications of NBFU and by special City rulings and regulations shall comply in design and safety features with such applicable codes, regulations and rulings, and shall be furnished and installed complete with all accessories and safety devices as therein specified.
- H. MOTORS ON LIGHTING PANELS: The largest A.C. motor permitted on branch circuits of lighting panels shall not exceed 1/4 horsepower.
- I. MOTORS RATED: 1/2 horsepower and larger shall be polyphase.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8**

**3.8 MOTOR CONTROL EQUIPMENT:**

This Section sets forth the requirements for motor controllers and associated devices. Such requirements are applicable to all motor control equipment furnished or installed.

- A. MANUFACTURER: All control equipment furnished under the Contract shall be the product of a single manufacturer. Exceptions to this rule may be granted in the case of controllers for fractional horsepower motors driving special equipment, the various units of which have been engineered to obtain specific performance.
- B. CONTROL ITEMS REQUIRED: The Contractor furnishing motors shall also furnish therewith complete disconnecting, starting and control equipment as required by the detailed Specifications, the various code authorities and for the successful operation of the driven equipment. These items include circuit breaker, magnetic starter with overload protection and low voltage release or protection, push button stations, pilot lights and alarms, float, pressure, temperature and limit switches, load transfer switches, devices for manual operation and speed controllers, etc. The Contractor shall furnish as many of these items as are required for the successful operation of the driven unit.
  1. Where a motor is to be located out of sight of the controller, the Contractor shall furnish an approved disconnecting means to be mounted near motor.
- C. TYPES OF STARTERS:
  1. SQUIRREL CAGE: A.C. motors of the squirrel cage type, rated from one (1) to 30 horsepower, shall have magnetic across the line starters; motors rated above 30 horsepower shall be furnished with reduced voltage (autotransformer type) starter or part winding start with time delay to reduce inrush current. Size of starters shall be based on 200V operation.
  2. SLIP RING: A.C. Motors of the slip-ring type shall be furnished with primary across the line starters interlocked with secondary starting and regulating equipment. The interlocking feature shall prevent starting of the motor when the secondary controller is off the initial starting point.
  3. MAGNETIC: For fractional horsepower motors, magnetic type starters are not required unless the particular method of controlling the driven equipment makes them necessary. Where individual single phase fractional horsepower motors or the sum of fractional horsepower motors controlled by an automatic device are 1/2 horsepower or more, magnetic starters and circuit breakers shall be used. Single phase A.C. motors smaller than 1/2 horsepower or three-phase A.C. motors smaller than one (1) horsepower where manual control is specified may be furnished with starters of toggle



switch or push button type with inbuilt thermal protection. No additional disconnecting means is required to be furnished with this type of starter. This type of starter may also be used in series with automatic control devices such as thermostats, float and pressure switches, provided the individual motor or the sum of fractional horsepower motors is less than ½ horsepower. Means for manual operation shall be provided.

- D. **DISCONNECTING BREAKER:** All motor starters, unless otherwise specified, shall be provided with a disconnecting means in the form of a circuit breaker of the type specified under Article 3.5 **CIRCUIT PROTECTIVE DEVICES**. This disconnecting means shall be contained in the same housing with the starter and shall be operable from outside. Means shall be provided for locking the handle of the circuit breaker in the "OFF" position if it is desired to take the equipment out of service and prevent unauthorized starting.
- E. **CONTROL CABINET: DRY LOCATIONS** - All starters shall be furnished with general purpose, NEMA Type 1, sheet metal enclosures with hinged covers and baked enamel finish.
- F. **CONTROL CABINET – WATERTIGHT:** In wet locations, cast iron watertight enclosures with threaded hubs, galvanized and gasketed hinged covers shall be provided.
- G. 1. **PANELS:** Motor control devices and appliances shall be mounted on approved insulating slabs with all wiring and connections made on the back of the slabs.
2. **WIRING AND TERMINALS:** Wiring connections for currents of 100 Amperes or less may be made with copper wire or cable with special flameproof insulating coverings. Such wires shall be installed in a neat workmanlike manner, flat against the slab, and held in place by clips. Connections shall be made with pressure connectors for No. 8 AWG and larger wires, and with grommets for small stranded wires. Except for incoming and outgoing main leads, all connections shall terminate on approved connector blocks, which may be installed on the face of the slab. For small, across the line starters, the above requirements may be modified if satisfactory connections are provided.
3. **COPPER BUS:** For currents exceeding 100 Amperes, copper bus shall be used in place of wires. The bus shall be constructed of copper rods, tubing or flat strap, bent and shaped properly and securely attached to the slab in a neat and workmanlike manner. The cross section of copper shall provide sufficient areas to keep current density at not more than 1,000 Amperes per square inch.
- H. **COOPERATION:** The Contractor's subcontractor(s) who furnish electrically operated equipment shall give to the Contractor and the Contractor's electrical subcontractor full information relative to sizes and locations of apparatus furnished by them which require electrical connections.
- I. **SPARE PARTS:**
1. **FURNISH:** The Contractor shall furnish the following spare parts pertaining to equipment furnished by each subcontractor.
- One (1) set of contact fingers and springs and thermal elements for each three (3) (or fraction) of each size of magnetic contactor starter.
- One (1) holding coil for each three (3) (or fraction) of each size of magnetic contactor starter.
2. **WRAPPER MARKING:** All parts shall be delivered to the Resident Engineer neatly wrapped and boxed and plainly tagged and marked for identification and reordering.

END OF SECTION 01 35 06





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text



**SECTION 01 35 26**  
**SAFETY REQUIREMENTS PROCEDURES**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

**1.2 SUMMARY:**

- A. This Section includes administrative and general procedural requirements for Safety and Health Requirements, including:
  - 1. Definitions
  - 2. Required Safety Meeting
  - 3. Compliance with Regulations
  - 4. Submittals
  - 5. Personnel Protective Equipment
  - 6. Hazardous Materials
  - 7. Emergency Suspension of Work
  - 8. Protection of Personnel
  - 9. Environmental Protection

**1.3 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.4 REQUIRED SAFETY MEETINGS:**

- A. Prior to commencing construction, the Resident Engineer will schedule and hold a preconstruction kick-off meeting either at DDC's main office or at the Project site with representatives of the Contractor, including the principal on-site project representative and one or more safety representatives, Commissioner's designated representatives and other concerned parties for the purpose of reviewing the Contract Safety requirements. The Contractor's safety requirements shall be reviewed, and implementation of safety provisions pertinent to the Work shall be discussed.
- B. The Contractor is responsible for conducting weekly documented jobsite safety meetings, given to all jobsite personnel including all subcontractors on the project, with the purpose of discussing safety topics and job specific requirements at the DDC worksite.



### 1.5 COMPLIANCE WITH REGULATIONS:

- A. The Work, including contact with or handling of hazardous materials, disturbance or dismantling of structures containing hazardous materials, and disposal of hazardous materials, shall comply with the applicable requirement for CFR Parts 1910 and 1926, and 40 CFR, Parts 61, 261, 761 and 763.
- B. Work involving disturbance or dismantling of asbestos or asbestos containing materials, demolition of structures containing asbestos and removal of asbestos, shall comply with 40 CFR Part 61, Subparts A and M, and 40 CFR Part 763, as applicable.
- C. Work shall additionally comply with all applicable federal, state and local safety and health regulations.
- D. In case of a conflict between applicable regulations, the more stringent requirements shall apply.
- E. All workers working on the DDC project site are required by NYC Local Law 41 to complete the OSHA 10 –hour training course.

### 1.6 SUBMITTALS:

- A. The Contractor shall submit, to the Resident Engineer, copies of the Safety Program, Site Safety Plan and other required documentation in accordance with the *"New York City Department of Design and Construction Safety Requirements."*
- B. Permits: If hazardous materials are disposed of off-site submit copies of shipping manifests and permits from applicable federal, state or local authorities and disposal facilities, and submit certificates that the material has been disposed of in accordance with regulations to the Resident Engineer.
- C. Accident Reporting: Submit a copy of each accident report to the Resident Engineer in accordance with the *"New York City Department of Design and Construction Safety Requirements."*
- D. All Asbestos and Lead project regulatory notifications are to be submitted to DDC's Bureau of Environmental and Geotechnical Services (BEGS) through the Resident Engineer.
- E. Request for Subcontractor Approval: Any subcontractor performing environmental work shall submit required documentation for approval to perform such work as required by DDC's BEGS.

## PART II – PRODUCTS

### 2.1 PERSONNEL PROTECTIVE EQUIPMENT:

Special facilities, devices, equipment and similar items used by the Contractor in execution of the Work shall comply with 29 CFR Part 1910, subpart I, Part 1926, subpart E and other applicable regulations.

### 2.2 HAZARDOUS MATERIALS:

- A. The Contractor shall bring to the attention of the Commissioner, any material encountered during execution of the Work that the Contractor suspects to be hazardous.
- B. The Commissioner shall determine whether the Contractor shall perform tests to determine if the material is hazardous. A change to the Contract price may be provided, subject to the applicable provisions of the Contract.
- C. If the material is found to be hazardous, the Commissioner may direct the Contractor to remediate the hazard and a change to the Contract price may be provided, subject to the applicable provisions of the Contract.



## **PART III – EXECUTION**

### **3.1 EMERGENCY SUSPENSION OF WORK:**

- A. When the Contractor is notified by the Commissioner of noncompliance with the safety provisions of the Contract, the Contractor shall immediately, unless otherwise instructed, correct the unsafe condition, at no additional cost to the City.
- B. If the Contractor fails to comply promptly, all or part of the Work may be stopped by notice from the Commissioner.
- C. When, in the opinion of the Commissioner, the Contractor has taken satisfactory corrective action, the Commissioner shall provide written notice to the Contractor that work may resume.
- D. The Contractor shall not be allowed any extension of time or compensation for damages in connection with a work stoppage for an unsafe condition.

### **3.2 PROTECTION OF PERSONNEL:**

- A. The Contractor shall take all necessary precautions to prevent injury to the public, occupants, or damage to property of others. The public and occupants includes all persons not employed by the Contractor or a subcontractor.
- B. Whenever practical, the work area shall be fenced, barricaded or otherwise blocked off from the Public or occupants to prevent unauthorized entry into the work area, in compliance with the requirements of Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS, and including, without limitation, the following:
  - 1. Provide traffic barricades and traffic control signage where construction activities occur in vehicular areas.
  - 2. Corridors, aisles, stairways, doors and exit ways shall not be obstructed or used in a manner to encroach upon routes of ingress or egress utilized by the public or occupants, or to present an unsafe condition to the public or occupants.
  - 3. Store, position and use equipment, tools, materials, scraps and trash in a manner that does not present a hazard to the public or occupant by accidental shifting, ignition or other hazardous activity.
  - 4. Store and transport refuse and debris in a manner to prevent unsafe and unhealthy conditions for the public and occupants. Cover refuse containers, and remove refuse on a frequent regular basis acceptable to the Resident Engineer. Use tarpaulins or other means to prevent loose transported materials from dropping from trucks or other vehicles.

### **3.3 ENVIRONMENTAL PROTECTION:**

- A. Dispose of solid, liquid and gaseous contaminants in accordance with local codes, laws, ordinances and regulations.
- B. Comply with applicable federal, state and local noise control laws, ordinances and regulations, including but not limited to 29 CFR 1910.95, 29 CFR 1926.52 and NYC Administrative Code Chapter 28 of Title 15.

**END OF SECTION 01 35 26**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

**SECTION 01 35 91  
HISTORIC TREATMENT PROCEDURES**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 91**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes administrative and procedural requirements for the treatment of Landmark Structures and Landmark Quality Structures, as identified in the Addendum. Specific requirements are indicated in other sections of the Specifications.
- B. This Section includes, without limitation, the following:
1. Storage and protection of existing historic materials.
  2. Temporary protection of historic materials during construction.
  3. General Protection
  4. Protection during use of heat-generating equipment.
  5. Photographic Documentation
  6. NYC Landmarks Preservation Commission Final Approval signoffs.

**1.3 RELATED SECTIONS: include without limitation the following:**

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- C. Section 01 33 00 SUBMITTAL PROCEDURES
- D. Section 01 77 00 CLOSEOUT PROCEDURES
- E. Section 01 78 39 CONTRACT RECORD DOCUMENTS

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Landmark Structure or Site: Any building or site which has been designated as a landmark, or any building or site within a landmark district, as designated by the New York City Landmarks Preservation Commission or the New York State Historic Preservation Office.

- D. Landmark Quality Structure: Any building which has been determined by the City to be of landmark quality and/or historical significance
- E. Preservation: To apply measures necessary to sustain the existing form, integrity, and materials of a historic property. Work may include preliminary measures to protect and stabilize the property.
- F. Rehabilitation: To make possible a compatible use for a property through repair, alterations, and additions while preserving those portions or features that convey its historical, cultural, or architectural values.
- G. Restoration: To accurately depict the form, features, and character of a property as it appeared at a particular period of time by means of the removal of features from other periods in its history and the reconstruction of missing features from the restoration period.
- H. Reconstruction: To reproduce in the exact form and detail a building, structure, or artifact as it appeared at a specific period in time.
- I. Stabilize: To apply measures designed to reestablish a weather-resistant enclosure and the structural reinforcement of an item or portion of the building while maintaining the essential form as it exists at present.
- J. Protect and Maintain: To remove deteriorating corrosion, reapply protective coatings, and install protective measures such as temporary guards; to provide the least degree of intervention.
- K. Repair: To stabilize, consolidate, or conserve; to retain existing materials and features while employing as little new material as possible. Repair includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials. Within restoration, repair also includes limited replacement in kind, rehabilitation, and reconstruction, with compatible substitute materials for deteriorated or missing parts of features when there are surviving prototypes.
- L. Replace: To duplicate and replace entire features with new material in kind. Replacement includes the following conditions:
  - 1. Duplication: Includes replacing elements damaged beyond repair or missing. Original material is indicated as the pattern for creating new duplicated elements.
  - 2. Replacement with New Materials: Includes replacement with new material when original material is not available as patterns for creating new duplicated elements.
  - 3. Replacement with Substitute Materials: Includes replacement with compatible substitute materials. Substitute materials are not allowed, unless otherwise indicated.
- M. Remove: To detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- N. Remove and Salvage: To detach items from existing construction and deliver them to the City ready for reuse.
- O. Remove and Reinstall: To detach items from existing construction, repair and clean them for reuse, and reinstall them where indicated.
- P. Existing to Remain or Retain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed and salvaged, or removed and reinstalled.



- Q. Material in Kind: Material that matches existing materials, as much as possible, in species, cut, color, grain, and finish.

#### 1.5 SUBMITTALS:

- A. Historic Treatment Program: Submit a written plan for each phase or process, including protection of surrounding materials during operations. Describe in detail materials, methods, and equipment to be used for each phase of work.
- B. Alternative Methods and Materials: If alternative methods and materials to those indicated are proposed for any phase of work, submit for Commissioner's approval a written description including evidence of successful use on other comparable projects, and program of testing to demonstrate effectiveness for use on this Project.
- C. Qualification Data: For historic treatment specialists as specified and required by individual sections of the project specifications.
- D. Photographs for Designated Landmark Structures: Submit photographs in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION and as described in this section.
- E. Record Documents: Include modifications to manufacturer's written instructions and procedures, as documented in the historic treatment preconstruction conference and as the Work progresses.

#### 1.6 QUALITY ASSURANCE:

- A. Special Experience Requirements: Special Experience Requirements may apply to the firm that will provide Historic Treatment Services. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- B. Historic Treatment Preconstruction Conference: The Resident Engineer will schedule and hold a preconstruction meeting at the site in accordance with Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION.
1. Review manufacturer's written instructions for precautions and effects of products and procedures on building materials, components, and vegetation.
    - a. Record procedures established as a result of the review and distribute to affected parties.

#### 1.7 STORAGE AND PROTECTION OF HISTORIC MATERIALS:

- A. Removed and Salvaged Historic Materials: As specified and required by individual sections of the project specifications.
- B. Removed and Reinstalled Historic Materials: As specified and required by individual sections of the project specifications.
- C. Existing Historic Materials to Remain: Protect construction indicated to remain against damage and soiling during historic treatment. When permitted by the Commissioner, items may be removed to a suitable, protected storage location during historic treatment and reinstalled in their original locations after historic treatment operations are complete.
- D. Storage and Protection: When removed from their existing location, store historic materials, at a location acceptable to the Commissioner, within a weather tight enclosure where they are protected from wetting by rain, snow, or ground water, and temperature variations. Secure stored materials to protect from theft.
1. Identify removed items with an inconspicuous mark indicating their original location.



**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION**

**3.1 PROTECTION, GENERAL:**

- A. Comply with manufacturer's written instructions for precautions and effects of products and procedures on adjacent building materials, components, and vegetation.
- B. Ensure that supervisory personnel are present when work begins and during its progress.
- C. Temporary Protection of Historic Materials during Construction:
  - 1. Protect existing materials during installation of temporary protections and construction. Do not deface or remove existing materials.
  - 2. Attachments of temporary protection to existing construction shall be approved by the Commissioner prior to installation.
- D. Protect landscape work adjacent to or within work areas as follows:
  - 1. Provide barriers to protect tree trunks.
  - 2. Bind spreading shrubs.
  - 3. Use coverings that allow plants to breathe and remove coverings at the end of each day. Do not cover plant material with a waterproof membrane for more than 8 hours at a time.
  - 4. Set scaffolding and ladder legs away from plants.
- E. Existing Drains: Prior to the start of work or any cleaning operations, test drains and other water removal systems to ensure that drains and systems are functioning properly. Notify Commissioner immediately of drains or systems that are stopped or blocked. Do not begin Work of this Section until the drains are in working order.
  - 1. Provide a method to prevent solids, including stone or mortar residue, from entering the drains or drain lines. Clean out drains and drain lines that become blocked or filled by sand or any other solids because of work performed under this Contract.
  - 2. Protect storm drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.

**3.2 PROTECTION DURING USE OF HEAT-GENERATING EQUIPMENT:**

- A. No roofing work requiring the use of an open flame shall be permitted on any Landmark Structure or any Landmark Quality Structure, whose roof or wall structure is made of wood or primarily of wood.
- B. Comply with the following procedures while performing work with heat-generating equipment, including welding, cutting, soldering, brazing, paint removal with heat, and other operations where open flames or implements utilizing heat are used:
  - 1. Obtain Commissioner's approval for operations involving use of open-flame or welding equipment. Notification shall be given for each occurrence and location of work with heat-generating equipment.
  - 2. As far as practical, use heat-generating equipment in shop areas or outside the building.
  - 3. Before work with heat-generating equipment commences, furnish personnel to serve as a fire watch (or watches) for location(s) where work is to be performed.



4. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
  5. Remove and keep the area free of combustibles, including, rubbish, paper, waste, etc., within area of operations.
  6. If combustible material cannot be removed, provide fireproof blankets to cover such materials.
  7. Where possible, furnish and use baffles of metal or gypsum board to prevent the spraying of sparks or hot slag into surrounding combustible material.
  8. Prevent the extension of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
  9. Inspect each location of the day's work not sooner than 30 minutes after completion of operations to detect hidden or smoldering fires and to ensure that proper housekeeping is maintained.
- C. Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to automatic sprinkler heads, shield the individual heads temporarily with guards.

### **3.3 PHOTOGRAPHIC DOCUMENTATION:**

Photographs for Designated Landmark Structures: Show existing conditions prior to any historic treatments, including one overall photograph and two close-up photographs of all areas of work affected. Show one overall photograph and two close-up photographs of all areas of work after the successful execution of all historical treatments.

### **3.4 NEW YORK CITY LANDMARKS PRESERVATION COMMISSION FINAL APPROVALS SIGNOFF:**

For all projects involving a Landmark Structure or Site, the Contractor, at the completion of the work, shall submit to the Commissioner, in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS, all documentation concerning the successful execution of all historic treatments. This shall include, but not be limited to, copies of all before and after photographs of historic treatments, one copy of the Contractor's as-built drawings, copies of testing and analysis results, including cleaning, mortar analysis, pointing mortars and all other information pertaining to work performed under the New York City Landmarks Preservation Commission jurisdiction.

**END OF SECTION 01 35 91**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 -- DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text



**SECTION 01 40 00**  
**QUALITY REQUIREMENTS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes the following:
- a. Definitions
  - b. Conflicting Requirements
  - c. Quality Assurance
  - d. Quality Control
  - e. Approval of Materials
  - f. Special Inspections (Controlled Inspection)
  - g. Inspections by Other City Agencies
  - h. Certificates of Approval
  - i. Acceptance Tests
  - j. Repair and Protection
- B. This Section includes administrative and procedural requirements for quality control to assure compliance with quality requirements specified in the Contract Documents.
- C. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
- D. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
- E. Provisions of this Section do not limit requirements for the Contractor to provide quality-assurance and -control services required by the Commissioner or authorities having jurisdiction.
- F. Specific test and inspection requirements are specified in the individual sections of the Specifications.
- G. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- H. COMMISSIONING: Refer to the Addendum to identify whether this project will be Commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.



**1.3 RELATED SECTIONS:** Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioning: A Total Quality Assurance process that includes checking the design and installation of equipment, as well as performing functional testing of the same to confirm that the installed equipment is operating and in conformance with the Contract Documents and the City's requirements.

**1.5 CONFLICTING REQUIREMENTS:**

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, the Contractor shall comply with the most stringent requirement as determined by the Commissioner. The Contractor shall refer any uncertainties and/or conflicting requirements to the Commissioner for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. The Contractor shall refer any uncertainties to the Commissioner for a decision before proceeding.

**1.6 QUALITY ASSURANCE:**

- A. General: Qualifications paragraphs in this Sub-Section establish the minimum qualification levels required. Individual Specification Sections specify additional requirements.
- B. Installer Qualifications: Special Experience Requirements may apply to the firm that will install, erect or assemble specified work required for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- C. Manufacturer Qualifications: Special Experience Requirements may apply to the firm that will manufacture equipment, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.

- D. Fabricator Qualifications: Special Experience Requirements may apply to the firm that will fabricate material, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum
- E. Professional Engineer Qualifications: A professional engineer who is licensed to practice in the State of New York and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or products that are similar to those indicated for this Project in material, design, and extent.
- F. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- G. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
  - 1. Build mockups in location and of size indicated or, if not indicated, as directed by the Resident Engineer.
  - 2. Notify Resident Engineer seven (7) days in advance of dates and times when mockups will be constructed.
  - 3. Demonstrate the proposed range of aesthetic effects and workmanship.
  - 4. Obtain Design Consultant's approval of mockups before starting work, fabrication, or construction.
  - 5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
  - 6. Demolish and remove mockups when directed, unless otherwise directed or indicated.

#### 1.7 QUALITY CONTROL:

- A. City's Responsibilities: Where quality-control services are indicated as the City's responsibility in the Specifications, the City will engage a qualified testing agency to perform these services.
  - 1. COST OF TESTS BORNE BY THE CITY: Where the City directs tests to be performed to determine compliance with the Specifications regarding materials or equipment, and where such compliance is ascertained as a result thereof, the City will bear the cost of such tests.
  - 2. The City will furnish the Contractor with names, addresses, and telephone numbers of testing entities engaged and a description of the types of testing and inspecting they are engaged to perform.
  - 3. Costs for retesting and re-inspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to the Contractor.
- B. Contractor's Responsibility: Tests and inspections not explicitly assigned to the City are the Contractor's responsibility. Unless otherwise indicated, the Contractor shall provide quality-control services as set forth in the Specifications and those required by Authorities having jurisdiction. The Contractor shall provide quality-control services required by Authorities having jurisdiction, whether specified or not.
  - 1. COST OF TESTS BORNE BY CONTRACTOR – In the case of tests which are specifically called for in the Specifications to be provided by the Contractor or tests which are required by any Authority having jurisdiction, but are not indicated as the responsibility of the City, the cost thereof shall be borne by the Contractor and shall be deemed to be included in the Contract price. The Contractor shall reimburse the City for expenditures incurred in providing tests on materials and equipment submitted by the Contractor as the equivalent of that specifically named in the Specifications and rejected for non-compliance.
  - 2. Where services are indicated as Contractor's responsibility, the Contractor shall engage a qualified testing agency to perform these quality-control services. Any testing agency engaged by the Contractor to perform quality control services is subject to prior approval by the Commissioner.

3. The Contractor shall not employ same entity engaged by the City, unless agreed to in writing by the Commissioner.
  4. The Contractor shall notify testing agencies and the Resident Engineer at least 72 hours in advance of the date and time for the performance of Work that requires testing or inspecting.
  5. Where quality-control services are indicated as Contractor's responsibility, the Contractor shall submit a certified written report, in triplicate to the Commissioner, of each quality-control service.
  6. Testing and inspecting requested by the Contractor and not required by the Contract Documents are Contractor's responsibility.
  7. The Contractor shall submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, the Contractor shall engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Results shall be submitted in writing as specified in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. **Retesting/Re-inspecting:** Regardless of whether the original tests or inspections were the Contractor's responsibility, the Contractor shall provide quality-control services, including retesting and re-inspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. **Associated Services:** The Contractor shall cooperate with entities performing required tests, inspections, and similar quality-control services, and shall provide reasonable auxiliary services as requested. The Contractor shall notify the testing agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
  2. Incidental labor and facilities necessary to facilitate tests and inspections.
  3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist testing entity in obtaining samples.
  4. Facilities for storage and field curing of test samples.
  5. Delivery of samples to testing entities.
  6. Design mix proposed for use for material mixes that require control by the testing entity.
  7. Security and protection for samples and for testing and inspecting equipment at the Project site.
- F. **Coordination:** Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
  2. Coordinate and cooperate with the Commissioning Authority/Agent as applicable for start-up, inspection and functional testing in the implementation of the Commissioning Plan.
- G. **Manufacturer's Directions:** Where the Specifications provide that the manufacturer's directions are to be used, such printed directions shall be submitted to the Commissioner.
- H. **Inspection of Material:** In the event that the Specifications require the Contractor to engage the services of an entity to witness and inspect any material especially manufactured or prepared for use in or part of the permanent construction, such entity shall be subject to prior written approval by the Commissioner.
1. **NOTICE** - The Contractor shall give notice in writing to the Commissioner sufficiently in advance of its intention to commence the manufacture or preparation of materials especially manufactured or prepared for use in or as part of the permanent construction. Such notice shall contain a request for inspection, the date of commencement and the expected date of completion of the manufacture or preparation of materials. Upon receipt of such notice, the Commissioner will arrange to have a representative present at such times during the manufacture as may be necessary to inspect the materials, or the Commissioner will notify the Contractor that the inspection will be made at a point

other than the point of manufacture, or the Commissioner will notify the Contractor that inspection will be waived.

- I. No Shipping Before Inspection: The Contractor shall comply with the foregoing before shipping any material.
- J. Certificate of Manufacture: When the Commissioner so requires, the Contractor shall furnish to the Commissioner authoritative evidence in the form of Certificates of Manufacture that the materials to be used in the work have been manufactured and tested in conformity with the Specifications. These certificates shall include copies of the results of physical tests and chemical analyses where necessary, that have been made directly on the product, or on similar products being fabricated by the manufacturer. This may include such approvals as B.S.A., M.E.A., B.E.C. Advisory Board, etc.
- K. Acceptance: When materials or manufactured products shall comprise such quantity that it is not practical to make physical tests or chemical analyses directly on the product furnished, a certificate stating the results of such tests or analyses of similar materials which were concurrently produced may, at the discretion of the Commissioner, be considered as the basis for the acceptance of such material or manufactured product.
- L. Testing Compliance: The testing personnel shall make the necessary inspections and tests, and the reports thereof shall be in such form as will facilitate checking to determine compliance with the Specifications, indicating thereon all analyses and/or test data and interpreted results thereof.
- M. Reports: Six (6) copies of the reports shall be submitted and authoritative certification thereof must be furnished to the Commissioner as a prerequisite for the acceptance of any material or equipment.
- N. Rejections: If, in making any test, it is ascertained by the Commissioner that the material or equipment does not comply with the Specifications, the Contractor will be notified thereof, and will be directed to refrain from delivering said materials or equipment, or to promptly remove it from the site or from the work and replace it with acceptable material at no additional cost to the City.
- O. Furnish Designated Materials: Upon rejection of any material or equipment submitted as the equivalent of that specifically named in the Specifications, the Contractor shall immediately proceed to furnish the designated material or equipment.

#### 1.8 APPROVAL OF MATERIALS:

- A. Local Laws: All materials, appliances and types or methods of construction shall be in accordance with the Specifications and shall in no event be less than that necessary to conform to the requirements of the New York City Construction Codes, Administrative Code and Charter of the City of New York.
- B. Approval of Manufacturer: The names of proposed manufacturers, material suppliers, and dealers who are to furnish materials, fixtures, equipment, appliances or other fittings shall be submitted to the Commissioner for approval, as early as possible, to afford proper review and analysis. No manufacturer will be approved for any materials to be furnished under the Contract unless it shall have a plant of ample capacity and shall have successfully produced similar products. All approvals of materials or equipment that are legally required by the New York City Construction Codes and other governing Authorities must be obtained prior to installation.
- C. All Materials: Fixtures, fittings, supplies and equipment furnished under the Contract shall be new and unused, except as approved by the Commissioner, and of standard first-grade quality and of the best workmanship and design. The City of New York encourages the use of recycled products where practical.
- D. INFORMATION TO SUPPLIERS - In asking for prices on materials under any item of the Contract, the Contractor shall provide the manufacturer or dealer with such complete information from the



Specifications and Contract Drawings as may in any case be necessary, and in every case the Contractor shall inform the manufacturer or dealer of all the General Conditions and requirements herein contained.

#### 1.9 SPECIAL INSPECTIONS:

##### A. SPECIAL INSPECTIONS:

1. Inspection of selected materials, equipment, installation, fabrication, erection or placement of components and connections made during the progress of the Work to ensure compliance with the Contract Documents and provisions of the New York City Construction Codes, shall be made by a Special Inspector. The City of New York will retain the services of the Special Inspector and bear the costs for the performance of Special Inspections in compliance with NYC Construction Codes requirements or as additionally may be called for in the project specifications, except as noted below for Form TR-3: Technical Report for Concrete Design Mix. The Special Inspector shall be an entity compliant with the requirements of the New York City Construction Codes. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring special inspection.
2. Form TR3: Technical Report Concrete Design Mix: The contractor shall be responsible for, and bear all costs associated with the filing and securing of approvals, if any, for Form TR3: Technical Report Concrete Design Mix, including, but not limited to, engaging the services of a New York City licensed Concrete Testing Lab for the review and approval of concrete design mix, testing, signatures and professional seals, etc., compliant with NYC Department of Buildings requirements, for each concrete design mix.
3. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring Special Inspection. The contractor shall be responsible for, and bear related costs to assure that all construction or work shall remain accessible and exposed for inspection purposes until the required inspection is completed.
4. Inspections and tests performed under "Special Inspection" shall not relieve the Contractor of the responsibility to comply with the Contract Documents, and that there is no warranty given to the Contractor by the City of New York in connection with such inspection and tests or certifications made under "Special Inspections".
5. The contractor must coordinate with the Resident Engineer or DDC Project Manager to provide access and schedule the work for inspection by the Special Inspector.

#### 1.10 INSPECTIONS BY OTHER CITY AGENCIES:

- A. Letter of Completion: Just prior to substantial completion of this Project, the Commissioner will file with the Department of Buildings, an application for a Letter of Completion or a Certificate of Occupancy for the structure.
- B. Final Inspections: In connection with the above mentioned application for a Letter of Completion or a Certificate of Occupancy and before certificates of final payments are issued, the Contractor will be required to arrange for all final inspections by the inspection staff of the Department of Buildings, Fire Department or other Governmental Agencies having jurisdiction, and secure all reports, sign offs, certificates, etc., by such inspection staff or other governmental agencies, in order that a Letter of Completion or Certificate of Occupancy can be issued promptly.

#### 1.11 CERTIFICATES OF APPROVAL:

- A. Responsibility: The Contractor shall be responsible for and shall obtain all final approvals for the work installed under the Contract in the form of such certificates that are required by all governmental agencies having jurisdiction over the work of the Contract.
- B. Transmittal: All such certificates shall be forwarded to the Commissioner through the Resident Engineer.



### 1.12 ACCEPTANCE TESTS:

- A. Government Agencies: All equipment and appliances furnished and installed under the Contract shall conform to the requirements of the Specifications, and shall in no event be less than that necessary to comply with the minimum requirements of the law and all of the governmental agencies having jurisdiction.
- B. Notice of Tests: Whenever the Specifications and/or any governmental agency having jurisdiction requires the acceptance test, the Contractor shall give written notice to all concerned of the time when these tests will be conducted.
- C. Energy: The City will furnish all energy, fuel, water and light required for tests.
- D. Labor and Materials: The Contractor shall furnish labor and all other material and instruments necessary to conduct the acceptance tests at no additional cost to the City.
- E. Certificates: The final acceptance by the Commissioner shall be contingent upon the Contractor delivering to the Commissioner all necessary certificates evidencing compliance in every respect with the requirements of the regulatory agencies having jurisdiction.
- F. Results: If the results of tests and Special Inspections indicate that the material or procedures do not meet requirements as set forth on the Contract Drawings or in the Specifications or are otherwise unsatisfactory, the Contractor shall only proceed as directed by the Resident Engineer. Additional costs resulting from retesting, re-inspecting, replacing of material and/or damage to the work and any delay caused to the schedule shall be borne by the Contractor.

## PART II – PRODUCTS (Not Used)

## PART III – EXECUTION

### 3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, the Contractor shall repair damaged construction and restore substrates and finishes.
  - 1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.

END OF SECTION 01 40 00



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

QUALITY REQUIREMENTS  
01 40 00 - 8

**SECTION 01 42 00  
REFERENCES**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 DEFINITIONS:**

**REFER TO THE ADDENDUM, Article IX, FOR ADDITIONAL DEFINITIONS AND REVISIONS TO THE CONTRACT AND SPECIFICATIONS**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. "APPROVED," ETC. - "Approved," "acceptable," "satisfactory," and words of similar import shall mean and intend approved, acceptable or satisfactory to the Commissioner.
- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- D. "DIRECTED," "REQUIRED," ETC.- Wherever reference is made in the Contract to the work or its performance, the terms "directed," "required," "permitted," "ordered," "designated," "prescribed," "determined," and words of similar import shall, unless expressed otherwise, imply the direction, requirements, permission, order, designation or prescription of the Commissioner.
- E. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings.



### 1.3 CODES, AGENCIES AND REGULATIONS:

A.D.A.A.G.	Americans with Disabilities Act (ADA) – Architectural Barriers Act (ABA)
B.G. & E.	Bureau of Gas and Electricity of the City of New York
B.S. & A.	New York City Board of Standards and Appeals
DOE	Department of Energy
E.C.C.C.N.Y.S.	Energy Conservation Construction Code of New York State
EPA	Environmental Protection Administration
N.Y.C.C.C.	New York City Construction Codes – includes: New York City Plumbing Code New York City Building Code New York City Mechanical Code New York City Fuel Gas Code
N.Y.S.D.O.L	New York State Department of Labor
N.Y.C.D.E.P	New York City Department of Environmental Protection
N.Y.C.E.C.	New York City Electrical Code
N.Y.C.E.C.C	New York City Energy Conservation Code
N.Y.C.F.C	New York City Fire Code
N.Y.S...D.E.C.	New York State Department of Environmental Conservation
O.S.H.A.	Occupational Safety & Health Administration

### 1.4 INDUSTRY STANDARDS:

- A. STANDARD REFERENCES – Unless otherwise specifically indicated in the Contract Documents, whenever reference is made to the furnishing of materials or testing thereof that conforms to the standards of any technical society, organization or body, it shall be construed to mean the latest standard, code, specification adopted and published by that technical society, organization or body, as of the date of the bid opening, unless the provisions of the New York City Construction Codes adopt a different or earlier dated version of such standard.
- B. APPLICABILITY OF STANDARDS: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect, to the extent referenced, as if bound or copied directly into the Contract Documents. Such standards are made a part of the Contract Documents by reference.
- C. CONFLICTING REQUIREMENTS: Where compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantity or quality, comply with the most stringent requirements. Immediately refer uncertainties, and requirements that are different but apparently equal, to the Commissioner in writing for a decision before proceeding.
- D. STANDARD SPECIFICATIONS - When no reference is made to a code, standard or specification, the Standard Specifications of the ASTM or the AIEE, as the case may be, shall govern.
- E. REFERENCES - Reference to a technical society, organization or body may be made in the Specifications by abbreviations. Abbreviations and acronyms used in the Specifications and other Contract Documents mean the associated name. The following names are subject to change and are



believed, but are not assured, to be accurate and up-to-date as of the Issue Date of the Contract Documents.

AA	Aluminum Association, Inc. (The)
AAADM	American Association of Automatic Door Manufacturers
AABC	Associated Air Balance Council
AAMA	American Architectural Manufacturers Association
AASHTO	American Association of State Highway and Transportation Officials
AATCC	American Association of Textile Chemists and Colorists (The)
ABAA	Air Barrier Association of America
ABMA	American Bearing Manufacturers Association
ACI	ACI International (American Concrete Institute)
ACPA	American Concrete Pipe Association
AEIC	Association of Edison Illuminating Companies, Inc. (The)
AF&PA	American Forest & Paper Association
AGA	American Gas Association
AGC	Associated General Contractors of America (The)
AGMA	American Gear Manufacturer Association
AHA	American Hardboard Association (Now part of CPA)
AHAM	Association of Home Appliance Manufacturers
AI	Asphalt Institute
AIA	American Institute of Architects (The)
AIEE	American Institute of Electrical Engineers
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AITC	American Institute of Timber Construction
ALCA	Associated Landscape Contractors of America (Now PLANET - Professional Landcare Network)



ALSc	American Lumber Standard Committee, Incorporated
ALI	Automotive Lift Institute
AMCA	Air Movement and Control Association International, Inc.
ANSI	American National Standards Institute
AOSA	Association of Official Seed Analysts, Inc.
APA	APA - The Engineered Wood Association
APA	Architectural Precast Association
API	American Petroleum Institute
ARI	Air-Conditioning & Refrigeration Institute
ARMA	Asphalt Roofing Manufacturers Association
ASA	American Standards Association
ASAE	American Society of Agricultural Engineers
ASCE/SEI	American Society of Civil Engineers, Structural Engineering Institute
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASSE	American Society of Sanitary Engineering
ASTM	ASTM International (American Society for Testing and Materials International)
AWCI	AWCI International (Association of the Wall and Ceiling Industry International)
AWCMA	American Window Covering Manufacturers Association (Now WCSC)
AWI	Architectural Woodwork Institute
AWPA	American Wood-Preservers' Association
AWSC	American Welding Society
AWWA	American Water Works Association
BHMA	Builders Hardware Manufacturers Association
BIA	Brick Industry Association (The)



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

BICSI	BICSI
BIFMA	BIFMA International (Business and Institutional Furniture Manufacturer's Association International)
BISSC	Baking Industry Sanitation Standards Committee
CIBSE	Chartered Institute of Building Services Engineers
CCC	Carpet Cushion Council
CDA	Copper Development Association
CEA	Canadian Electricity Association
CFFA	Chemical Fabrics & Film Association, Inc.
CGA	Compressed Gas Association
CGSB	Canadian General Standards Board
CIMA	Cellulose Insulation Manufacturers Association
CIPRA	Cast Iron Pipe Research Association
CISCA	Ceilings & Interior Systems Construction Association
CISPI	Cast Iron Soil Pipe Institute
CLFMI	Chain Link Fence Manufacturers Institute
CPA	Composite Panel Association
CPPA	Corrugated Polyethylene Pipe Association
CPSC	Consumer Product Safety Commission
CRI	Carpet & Rug Institute (The)
CRSI	Concrete Reinforcing Steel Institute
CSA	Canadian Standards Association
CSI	Cast Stone Institute
CSI	Construction Specifications Institute (The)
CSSB	Cedar Shake & Shingle Bureau
CTI	Cooling Technology Institute (Formerly: Cooling Tower Institute)





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

DASMA	Door and Access Systems Manufacturer's Association International
DHI	Door and Hardware Institute
DOC	U.S. Department of Commerce – National Institute of Standards and Technology
EIA	Electronic Industries Alliance
DOJ	U.S. department of Justice
EIMA	EIFS Industry Members Association
DOL	U.S. Department of labor
EJCDC	Engineers Joint Contract Documents Committee
DOTn	U.S. Department of Transportation
EN	European Committee of Standards
EJMA	Expansion Joint Manufacturers Association, Inc.
ESD	ESD Association
EVO	Efficiency Valuation Organization
FEMA	Federal Emergency Management Agency
FIBA	Federation Internationale de Basketball Amateur (The International Basketball Federation)
FIVB	Federation Internationale de Volleyball (The International Volleyball Federation)
FMG	FM Global (Formerly: FM - Factory Mutual System)
FMRC	Factory Mutual Research (Now FMG)
FRSA	Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.
FSA	Fluid Sealing Association
FSC	Forest Stewardship Council
GA	Gypsum Association
GANA	Glass Association of North America
GRI	(Now GSI)
GS	Green Seal
GSI	Geosynthetic Institute



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

HI	Hydraulic Institute
HI	Hydronics Institute
HMMA	Hollow Metal Manufacturers Association (Part of NAAMM)
HPVA	Hardwood Plywood & Veneer Association
HPW	H. P. White Laboratory, Inc.
HUD	U.S. Department of Housing and Urban Development
IAPMO	International Association of Plumbing and Mechanical Officials
IAS	International Approval Services (Now CSA International)
IBF	International Badminton Federation
ICC	International Code Council, Inc.
ICEA	Insulated Cable Engineers Association, Inc.
ICRI	International Concrete Repair Institute, Inc.
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc. (The)
IESNA	Illuminating Engineering Society of North America
IEST	Institute of Environmental Sciences and Technology
IGCC	Insulating Glass Certification Council
IGMA	Insulating Glass Manufacturers Alliance
ILI	Indiana Limestone Institute of America, Inc.
ISO	International Organization for Standardization
ISSFA	International Solid Surface Fabricators Association
ITS	Intertek
ITU	International Telecommunication Union
KCMA	Kitchen Cabinet Manufacturers Association
LMA	Laminating Materials Association (Now part of CPA)
LPI	Lightning Protection Institute
MBMA	Metal Building Manufacturers Association



MFMA	Maple Flooring Manufacturers Association, Inc.
MFMA	Metal Framing Manufacturers Association
MH	Material Handling (Now MHIA)
MHIA	Material Handling Industry of America
MIA	Marble Institute of America
MPI	Master Painters Institute
MSS	Manufacturers Standardization Society of The Valve and Fittings Industry Inc.
NAAMM	National Association of Architectural Metal Manufacturers
NACE	NACE International (National Association of Corrosion Engineers International)
NADCA	National Air Duct Cleaners Association
NAGWS	National Association for Girls and Women in Sport
NAIMA	North American Insulation Manufacturers Association
NBGQA	National Building Granite Quarries Association, Inc.
NCAA	National Collegiate Athletic Association (The)
NCMA	National Concrete Masonry Association
NCPI	National Clay Pipe Institute
NCTA	National Cable & Telecommunications Association
NEBB	National Environmental Balancing Bureau
NECA	National Electrical Contractors Association
NeLMA	Northeastern Lumber Manufacturers' Association
NEMA	National Electrical Manufacturers Association
NETA	InterNational Electrical Testing Association
NFHS	National Federation of State High School Associations
NFPA	NFPA (National Fire Protection Association)
NFRC	National Fenestration Rating Council



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

NGA	National Glass Association
NHLA	National Hardwood Lumber Association
NLGA	National Lumber Grades Authority
NIS	National Institute of Standards and Technology
NOFMA	NOFMA: The Wood Flooring Manufacturers Association (Formerly: National Oak Flooring Manufacturers Association)
NRCA	National Roofing Contractors Association
NRMCA	National Ready Mixed Concrete Association
NSF	NSF International (National Sanitation Foundation International)
NSSGA	National Stone, Sand & Gravel Association
NTMA	National Terrazzo & Mosaic Association, Inc. (The)
NTRMA	National Tile Roofing Manufacturers Association (Now TRI)
NWWDA	National Wood Window and Door Association (Now WDMA)
OPL	Omega Point Laboratories, Inc. (Acquired by ITS - Intertek)
PCI	Precast / Pre-stressed Concrete Institute
PDCA	Painting & Decorating Contractors of America
PDI	Plumbing & Drainage Institute
PGI	PVC Geomembrane Institute
PLANET	Professional Landcare Network (Formerly: ACLA - Associated Landscape Contractors of America)
PPS	Power Piping Society
PTI	Post-Tensioning Institute
RCSC	Research Council on Structural Connections
RFCI	Resilient Floor Covering Institute
RIS	Redwood Inspection Service
RMI	Rack Manufacturers Institute
RTI	(Formerly: NTRMA - National Tile Roofing Manufacturers Association) (Now TRI)

SAE	SAE International
SCAQMD	South Coast Air Quality Management District
SCS	Scientific Certification System
SDI	Steel Deck Institute
SDI	Steel Door Institute
SEFA	Scientific Equipment and Furniture Association
SGCC	Safety Glazing Certification Council
SHBI	Steel Heating Boiler Institute
SIA	Security Industry Association
SIGMA	Sealed Insulating Glass Manufacturers Association (Now IGMA)
SJI	Steel Joist Institute
SMA	Screen Manufacturers Association
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association
SMPTE	Society of Motion Picture and Television Engineers
SPFA	Spray Polyurethane Foam Alliance (Formerly: SPI/SPFD - The Society of the Plastics Industry, Inc.; Spray Polyurethane Foam Division)
SPIB	Southern Pine Inspection Bureau (The)
SPRI	Single Ply Roofing Industry
SSINA	Specialty Steel Industry of North America
SSPC	SSPC: The Society for Protective Coatings
STI	Steel Tank Institute
SWI	Steel Window Institute
SWRI	Sealant, Waterproofing, & Restoration Institute
TCA	Tile Council of America, Inc.
TIA/EIA	Telecommunications Industry Association/Electronic Industries Alliance
TMS	The Masonry Society



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

TPI	Truss Plate Institute, Inc.
TPI	Turfgrass Producers International
TRI	Tile Roofing Institute (Formerly: RTI - Roof Tile Institute)
UL	Underwriters Laboratories Inc.
ULC	Underwriters Laboratories of Canada
UNI	Uni-Bell PVC Pipe Association
USAV	USA Volleyball
USC	United States Code
USGBC	U.S. Green Building Council
USITT	United States Institute for Theatre Technology, Inc.
WASTEC	Waste Equipment Technology Association
WCLIB	West Coast Lumber Inspection Bureau
WCMA	Window Covering Manufacturers Association (Now WCSC)
WCSC	Window Covering Safety <b>Council</b> (Formerly: WCMA - Window Covering Manufacturers Association)
WDMA	Window & Door Manufacturers Association (Formerly: NWWDA - National Wood Window and Door Association)
WI	Woodwork Institute (Formerly: WIC - Woodwork Institute of California)
WIC	Woodwork Institute of California (Now WI)
WMMPA	Wood Moulding & Millwork Producers Association
WRI	Wire Reinforcement Institute, Inc.
USEPA	United States Environmental Protection Agency
WSRCA	Western States Roofing Contractors Association
WWPA	Western Wood Products Association

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 42 00**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

REFERENCES  
01 42 00 -12



**SECTION 01 50 00  
TEMPORARY FACILITIES, SERVICES AND CONTROLS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This section includes the following:
- a. Temporary Water System
  - b. Temporary Sanitary Facilities
  - c. Temporary Electric Power, Temporary Lighting System, And Site Security Lighting
  - d. Temporary Heat
  - e. Dewatering Facilities And Drains
  - f. Temporary Field Office for Contractor
  - g. Resident Engineer's Office
  - h. Material Sheds
  - i. Temporary Enclosures
  - j. Temporary Partitions
  - k. Temporary Fire Protection
  - l. Work Fence Enclosure
  - m. Rodent and Insect Control
  - n. Plant Pest Control Requirements
  - o. Project Identification Signage
  - p. Security Guards/Fire Guards on Site
  - q. Project Sign and Rendering
  - r. Safety

**1.3 RELATED SECTIONS:** include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 54 11 TEMPORARY ELEVATORS AND HOISTS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Permanent Enclosure: As determined by Commissioner, permanent or temporary roofing that is complete, insulated, and weather tight; exterior walls which are insulated and weather tight; and all openings that are closed with permanent construction or substantial temporary closures.



- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.5 SUBMITTALS:**

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Reports: Submit reports of tests, inspections, meter readings and similar procedures for temporary use.

**1.6 PROJECT CONDITIONS:**

- A. Temporary Use of Permanent Facilities and Services: The Contractor shall be responsible for the operation, maintenance, and protection of each permanently installed facility and service while in use during construction before Final Acceptance by the City, regardless of previously assigned responsibilities.
- B. Install, operate, maintain and protect temporary facilities, services and controls.
1. Keep temporary services and facilities clean and neat in appearance.
  2. Operate temporary services in a safe and efficient manner.
  3. Relocate temporary services and facilities as needed as Work progresses.
  4. Do not overload temporary services and facilities or permit them to interfere with progress.
  5. Provide necessary fire prevention measures.
  6. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on-site

**1.7 NON-REGULAR WORK HOURS (OVERTIME):**

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if the Drawings and/or the Specifications indicate that the Work, or specific components thereof, must be performed during other than regular working hours. In such case, all costs for the provision of temporary services, facilities and controls during other than regular working hours shall be deemed included in the total Contract Price.
- B. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if a change order is issued directing the Contractor to perform the Work, or specific components thereof, during other than regular working hours. In such case, compensation for the provision of temporary services, facilities and controls during other than regular working hours shall be provided through the change order.

**1.8 SERVICES BEYOND COMPLETION DATE:**

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall provide such temporary services, facilities and controls even if completion of all required work at the site occurs after the time fixed for such completion in Schedule A.

## **PART II – PRODUCTS**

### **2.1 MATERIALS:**

- A. Provide undamaged materials in serviceable condition and suitable for use intended.
- B. Tarpaulins: Waterproof, fire-resistant UL labeled with flame spread rating of 15 or less. For temporary enclosures, provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.
- C. Water: Potable and in compliance with requirements of the Department of Environmental Protection.

### **2.2 EQUIPMENT:**

- A. Provide undamaged equipment in serviceable condition and suitable for use intended.
- B. Water Hoses: Heavy-duty abrasive-resistant flexible rubber hoses, 100 feet (30 m) long with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
- C. Electric Power Cords: Grounded extension cords.
  - 1. Provide hard-service cords where exposed to abrasion or traffic.
  - 2. Provide waterproof connectors to connect separate lengths of electric cords where single lengths will not reach areas of construction activity.
  - 3. Do not exceed safe length-voltage ratio.
- D. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

## **PART III – EXECUTION:**

### **3.1 INSTALLATION, GENERAL:**

- A. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities as approved by the Resident Engineer.

### **3.2 TEMPORARY WATER SYSTEM:**

<b>REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 A</b>
---

- A. TEMPORARY WATER SYSTEM - NEW FACILITIES: During construction, the Contractor shall furnish a Temporary Water System as set forth below.
  - 1. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Dept. of Environmental Protection for the schedule of charges for water use during construction. The Contractor will be responsible for payment of water charges.
  - 2. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Department of Environmental Protection's Bureau of Water Supply and obtain a permit to install the temporary water supply system. The system shall be installed and maintained for the use of the Contractor and its subcontractors. A copy of the above mentioned permit shall be filed with the Commissioner. The Contractor shall provide temporary water main, risers and waste stacks as directed and install on each floor, outlets with two (2) 3/4" hose valve connections over a barrel installed on a steel pan. The Contractor shall provide drains from the pans to the stack and house sewer and hose bibs to drain the water supply

risers and mains. During winter months, the Contractor shall take the necessary precautions to prevent the temporary water system from freezing. The Contractor shall provide repairs to the temporary water supply system for the duration of the project until said temporary system is dismantled and removed.

3. Disposition of Temporary Water System: The Contractor shall be responsible for dismantling the temporary water system when no longer required for the construction operations, or when replaced by the permanent water system installed for the project, or as otherwise directed by the Resident Engineer. All repair work resulting from the dismantling of the temporary water system shall be the responsibility of the Contractor.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 B**

- B. TEMPORARY WATER SYSTEM – PROJECTS IN EXISTING FACILITIES:
  1. When approved by the Commissioner, use of existing water system will be permitted for temporary water service during construction, as long as the system is cleaned and maintained in a condition acceptable to the Commissioner. At Substantial Completion, the Contractor shall restore the existing water system to conditions existing before initial use.
  2. The Contractor shall be responsible for all repairs to the existing water system permitted to be used for temporary water service during construction. The Contractor shall be responsible to maintain the existing system in a clean condition on a daily basis, acceptable to the Commissioner.
  3. The Contractor will be responsible for payment of water charges as directed by the Commissioner. Billing will be in accordance with the Department of Environmental Protection schedule of charges for Building Purposes.
- C. WASH FACILITIES: The Contractor shall install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a healthy and sanitary condition.
  1. Dispose of drainage properly.
  2. Supply cleaning compounds appropriate for each condition.
  3. Include safety showers, eyewash fountains and similar facilities for the convenience, safety and sanitation of personnel.
- D. DRINKING WATER FACILITIES: The Contractor shall provide drinking water fountains or containerized tap-dispenser bottled-drinking water units, complete with paper cup supplies. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg. F (7 to 13 deg. C).

**3.3 TEMPORARY SANITARY FACILITIES:**

- A. The Contractor shall provide toilets, wash facilities and drinking water fixtures in compliance with regulations and health codes for type, number, location, operation and maintenance of fixtures and facilities. Provide toilet tissue, paper towels, paper cups and similar disposable materials as appropriate for each facility, and provide covered waste containers for used materials.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 B**

- B. SELF-CONTAINED TOILET UNITS:
  1. The Contractor shall provide temporary single-occupant toilet units of the chemical, aerated recirculation, or combustion type for use by all construction personnel. Units shall be properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material. Quantity of toilet units shall comply with the latest OSHA regulations.
  2. Toilets: Install separate self-contained toilet units for male and female personnel. Shield toilets to ensure privacy.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 C**

C. EXISTING TOILETS:

1. TOILET FACILITIES: When approved by the Commissioner, the Contractor shall arrange for the use of existing toilet facilities by all personnel during the execution of the work. The Contractor shall be responsible to clean and maintain facilities in a condition acceptable to the Resident Engineer and, at completion of construction, to restore facilities to their condition at the time of initial use.
2. MAINTENANCE - The Contractor shall maintain the temporary toilet facilities in a clean and sanitary manner and make all necessary repairs.
3. NUISANCES - The Contractor shall not cause any sanitary nuisance to be committed by its employees or the employees of its subcontractors in or about the work, and shall enforce all sanitary regulations of the City and State Health Authorities.

**3.4 TEMPORARY ELECTRIC POWER, TEMPORARY LIGHTING SYSTEM, AND SITE SECURITY LIGHTING:**

A. SCOPE: This Section sets forth the General Conditions and procedures relating to Temporary Electric Power, Temporary Lighting System and Site Security Lighting during the construction period.

B. TEMPORARY ELECTRIC POWER:

The Contractor shall provide and maintain a Temporary Electric Power service and distribution system of sufficient size, capacity and power characteristics required for construction operations for all required work by the Contractor and its subcontractors, including but not limited to power for the Temporary Lighting System, Site Security Lighting, construction equipment, hoists, temporary elevators and all field offices. Temporary Electric Power shall be provided as follows:

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (1)**

1. CONNECTION TO UTILITY LINES:

- a. Temporary Electric Power Service for use during construction shall be provided as follows: The Contractor shall make all necessary arrangements with the Public Utility Company and pay all charges for the Temporary Electric Power system. The Contractor shall include in its total Contract Price any charges for Temporary Electric Power, including charges that may be made by the Public Utility Company for extending its electrical facilities, and for making final connections. The Contractor shall make payment directly to the Public Utility Company.
- b. APPLICATIONS FOR METER: The Contractor shall make application to the Public Utility Company and sign all documents necessary for, and pay all charges incidental to, the installation of a watt hour meter or meters for Temporary Electric Power. The Contractor shall pay to the Public Utility Company, all bills for Temporary Electric energy used throughout the work, as they become due.
- c. SERVICE AND METERING EQUIPMENT - The Contractor shall furnish and install, at a suitable location on the site, approved service and metering equipment for the Temporary Electric Power System, ready for the installation of the Public Utility Company's metering devices. The temporary service mains to and from the metering location shall be not less than 100 Amperes, 3-phase, 4-wire and shall be of sufficient capacity to take care of all demands for all construction operations and shall meet all requirements of the NYCEC.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (2)**

2. CONNECTION TO EXISTING ELECTRICAL POWER SERVICE:
- a. When approved by the Commissioner, electrical power service for the Temporary Lighting System and for the operation of small tools and equipment less than ¼ horsepower may be taken from the existing electric distribution system if the existing system is of adequate capacity for the temporary power load. The Contractor shall cooperate and coordinate with the facility custodian, so as not to interfere with the normal operation of the facility.
  - b. There will be no charge to the Contractor for the electrical energy consumed.
  - c. The Contractor shall provide, maintain and pay all costs for separate temporary electric power for any temporary power for equipment larger than 1/4 horsepower. When directed by the Commissioner, the Contractor shall remove its own temporary power system.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (3)**

3. ELECTRICAL GENERATOR POWER SERVICE:
- a. When connection to Utility Lines or existing facility electric service is not available or is not adequate to supply the electric power need for construction operations, the Contractor shall provide self-contained generators to provide power beyond that available.
  - b. Pay for all energy consumed in the progress of the Work, exclusive of that available from the existing facility or Utility Company.
  - c. Provide for control of noise from the generators.
  - d. Comply with the Ultra Low Sulfur Fuel in Non-Road Vehicles requirements as set forth in Article 5.4 of the Contract.
- C. USE OF COMPLETED PORTIONS OF THE ELECTRICAL WORK:
1. USE OF MAIN DISTRIBUTION PANEL: As soon as the permanent electric service feeders and equipment, metering equipment and main distribution panel are installed and ready for operation, the Contractor shall have the temporary lighting and power system changed over from the temporary service points to the main distribution panel.
  2. COST OF CHANGE OVER - The Contractor shall be responsible for all costs due to this change over of service and it shall also make application to the Public Utility Company for a watt hour meter to be set on the permanent meter equipment.
  3. The requirements for temporary electric power service specified herein shall be adhered to after change over of service until final acceptance of the project.
  4. NO EXTRA COST - The operation of the service and switchboard equipment shall be under the supervision of the Contractor, but this shall in no way be interpreted to mean the acceptance of such part of the installation or relieve the Contractor from its responsibility for the complete work or any part thereof. There shall be no additional charge for supervision by the Contractor.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 D**

- D. TEMPORARY LIGHTING SYSTEM:
1. The Contractor shall provide adequate service for the temporary lighting system, or a minimum of 100 Amperes, 3-phase, 4-wire service for the temporary lighting system, whichever is

- greater, and make all necessary arrangements with the Public Utility Company and pay all charges by them for the Temporary Lighting System
2. The Contractor shall furnish and connect to the metered service point, a Temporary Lighting System to illuminate the entire area where work is being performed and points adjacent to the work, with separately fused circuits for stairways and bridges. Control switches for stairway circuits shall be located near entrance on ground floor.
  3. ITEMS: The Temporary Lighting System provided by the Contractor shall consist of wiring, fixtures, left-hand double sockets, (one (1) double socket for every 400 square feet, with one (1) lamp and one (1) three-prong outlet) lamps, fuses, locked type guards, pigtails and any other incidental material. Additional details may be outlined in the detailed Specifications for the Electrical Work. Changes may be made, provided the full equivalent of those requirements is maintained.
  4. The Temporary Lighting System shall be progressively installed as required for the advancement of the work under the Contract.
  5. RELOCATION: The cost for the relocation or extension of the original Temporary Lighting System, required by the Contractor or its subcontractors, that is not required due to the normal advancement of the work, as determined by the Resident Engineer, shall be borne by the Contractor.
  6. PIGTAILS: shall be furnished with left-hand sockets with locked type guards and 40 feet of rubber covered cable. The Contractor shall furnish and distribute a minimum of three (3) complete pigtails to each subcontractor. See the detailed Electrical Specifications for possible additional pigtails required.
  7. LAMPS: The Contractor shall furnish and install one (1) complete set of lamps, including those for the trailers. Broken and burned out lamps in the temporary lighting system, DDC field office and construction trailers, shall be replaced by the Contractor. All lamps shall be compact fluorescent
  8. CIRCUIT PROTECTION: The Contractor shall furnish and install GFI protection for the Temporary Lighting and Site Security Lighting Systems.
  9. MAINTENANCE OF TEMPORARY LIGHTING SYSTEM:
    - a. The Contractor shall maintain the Temporary Lighting System in good working order during the scheduled hours established.
    - b. The Contractor shall include in its total Contract Price all costs in connection with the Temporary Lighting System, including all costs for installation, maintenance and electric power.
  10. REMOVAL OF TEMPORARY LIGHTING SYSTEM: The temporary lighting system shall be removed by the Contractor when authorized by the Commissioner.
  11. HAND TOOLS: The temporary lighting system shall not be used for power purposes, except that light hand tools not larger than 1/4 horsepower may be operated from such system by the Contractor and its subcontractors.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 E**

- E. SITE SECURITY LIGHTING (FOR NEW CONSTRUCTION ONLY):
1. The Contractor shall furnish, install and maintain a system of site security lighting, as herein specified, to illuminate the construction site of the project, and it shall be connected to and energized from the Temporary Lighting System. All costs in connection with site security lighting shall be deemed included in the total Contract Price.
  2. It is essential that the site security lighting system be completely installed and operating, at the earliest possible date. The Contractor shall direct its subcontractors to cooperate, coordinate and exert every effort to accomplish an early complete installation of the site security lighting system. After the system is installed and in operation, if a part of the system interferes with the work of any trade, the Contractor shall be completely responsible for the expense of removing,

- relocating and replacing all equipment necessary to reinstate the system to proper operating conditions.
3. The system shall consist of flood lighting by pole mounted guarded sealed-beam units. Floodlight units shall be mounted 16 feet above grade. Floodlights shall be spaced around the perimeter of the site to produce an illumination level of no less than one (1) foot candle around the perimeter of the site, as well as in any potentially hazardous area or any other area within the site that might be deemed by the Resident Engineer to require security illumination. The system shall be installed in a manner acceptable to the Resident Engineer. The first lighting unit in each circuit shall be provided with a photoelectric cell for automatic control. The photoelectric cell shall be installed as per manufacturer's recommendations.
  4. All necessary poles shall be furnished and installed by the Contractor.
  5. The site security lighting shall be kept illuminated at all times during the hours of darkness. The Contractor shall, at its own expense, shall keep the system in operation, and shall furnish and install all material necessary to replace all damaged or burned out parts.
  6. The Contractor shall be on telephone call alert for maintaining the system during the operating period stated above.
  7. All materials and equipment furnished under this section shall remain the property of the Contractor and shall be removed and disposed of by the Contractor when authorized in writing by the Resident Engineer.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5**

**3.5 TEMPORARY HEAT:**

**A. GENERAL:**

1. Definition: The provision of Temporary Heat shall mean the provision of heat in order to permit construction to be performed in accordance with the Progress Schedule during all seasons of the year and to protect the work from the harmful effects of low temperature. In the event the building, or any portion thereof, is occupied during construction, the provision of Temporary Heat shall include the provision of heat to permit normal operations in such occupied areas.
  - a. The provision of Temporary Heat shall be in accordance with the temperature requirements set forth in Sub-Section 3.5 C herein.
  - b. The provision of Temporary Heat shall include the provision of: 1) all fuel necessary and required, 2) all equipment necessary and required, and 3) all operating labor necessary and required. Operating labor shall mean that minimum force required for the safe day to day operation of the system for the provision of Temporary Heat and shall include, without limitation, heating maintenance labor and/or Fire Watch as required by NYC Fire Department regulations. Operating labor may be required seven (7) days per week and during other than normal working hours, for the period of time required by seasonal weather conditions.
  - c. In the event the building, or any portion thereof, is occupied and the Project involves the replacement, modification and/or shut down of the permanent heating system, or any key component thereof; and such system is a combined system which furnishes domestic hot water for the building occupants, the provision of Temporary Heat shall include the provision of domestic hot water at the same temperature as the system which is being replaced. Domestic hot water shall be provided in accordance with the phasing requirements set forth in the Contract Documents.
2. Responsibility: The Contractor's responsibility for the provision of Temporary Heat, including all expenses in connection therewith, shall be as set forth below:
  - a. Projects Involving Enclosure of the Building:



- 1) Prior to Enclosure - Until the Commissioner determines that the building has been enclosed, as set forth in Sub-Section 3.5 B; the Contractor shall be responsible for the provision of Temporary Heat.
  - 2) Post Enclosure - Once the Commissioner determines that the building, or any portion thereof, has been enclosed, as set forth in Sub-Section 3.5 B, the Contractor shall be responsible for the provision of Temporary Heat by one or more of the following means: 1) by an existing heating system (if any), 2) by a permanent heating system which is being installed as part of the Project, or 3) by a temporary heating system(s).
  - 3) The Contractor shall, within two (2) weeks of the kick-off meeting, submit to DDC for review its proposed plan to provide Temporary Heat. Such plan is subject to approval by the Resident Engineer. The Contractor shall provide Temporary Heat in accordance with the approved plan until written acceptance by the Commissioner of the work of all Contractors, including punch list work, unless directed otherwise in writing by the Commissioner. The responsibility of the Contractor provided for herein is subject to the exception set forth in Sub-Section 3.5 A.2 (b) herein.
- b. Projects not involving Enclosure of the Building:
- 1) If the Project involves the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, the Contractor shall be responsible for the provision of Temporary Heat, except as otherwise provided in Sub-Section 3.5 H.3(b).2 herein.
  - 2) If the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof; there is no Contractor responsibility of the provision of Temporary Heat, unless otherwise specified in the Contract Documents. However, if the Commissioner, pursuant to Sub-Section 3.5 H.3 (b).1 herein, determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat and shall be paid for the same in accordance with Sub-Section 3.5 H.3 (b).1 herein.
- B. ENCLOSURE OF STRUCTURES:
1. Notification: The Contractor shall notify all its subcontractors and the Resident Engineer at least 30 days prior to the anticipated date that the building(s) will be enclosed.
  2. Commissioner Determination: The Commissioner shall determine whether the building, or any portion thereof, has been enclosed. As indicated in Sub-Section 3.5 A.2 above, once the building has been enclosed, the Contractor shall be responsible for the provision of Temporary Heat. The Commissioner's determination with respect to building enclosure shall be based upon all relevant facts and circumstances, including without limitation, 1) whether the building meets the criteria set forth in Paragraph 3 below, and 2) whether the openings in the building, such as doorways and windows, have been sufficiently covered so as to provide reasonable heat retention and protection from the elements
  3. Criteria for enclosure:
    - a. Roof Area:
      - 1) A building shall be considered to be roofed when the area to be roofed is covered by a permanent structure and all openings through the permanent structure are covered and protected by temporary covers as described in Paragraph (c) below.
      - 2) Intermediate floor structures of multi-floor buildings shall be considered to be roofed subject to the same requirements of the building roof.





- 3) The final roofing system need not be in place for the building or structure to be determined to be enclosed; provided, however, all openings through the permanent structure covering the roof must be covered and protected by temporary covers, as described in Paragraph (c) below.
- b. Walls: For the walls to be determined to be enclosed permanent exterior wall elements or facing material must be in place and all openings must be covered and protected by temporary covers, as described in Paragraph (c) below.
- c. Temporary Covers: In order to be acceptable, temporary covers must be securely fixed to prevent the entrance of rain, snow and direct wind. The minimum material requirements for temporary covers are as follows: 1) minimum 10 mil. Plastic 2) minimum 12 ounce waterproof canvas tarpaulins, or 3) a minimum three-eighths (3/8) inch thickness exterior grade plywood.
- d. Temporary covers for openings shall be the responsibility of the Contractor and such work shall be deemed included in the Contract price.

C. TEMPERATURE REQUIREMENTS:

- 1. Unoccupied Buildings: The temperature requirement for the provision of Temporary Heat in unoccupied buildings shall be the GREATER of the following: 1) 50 degrees Fahrenheit, or 2) the temperature requirement for the particular type of work set forth in the Contract Documents.
- 2. Occupied Buildings: The temperature requirement for the provision of Temporary Heat in occupied buildings, or portions thereof, shall be the GREATER of the following: 68 degrees Fahrenheit or the temperature requirement for the particular type of work set forth in the Contract Documents.

D. DURATION:

- 1. The Contractor shall be required to provide Temporary Heat until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall be responsible for the provision of Temporary Heat for the time specified herein, regardless of any delays in completion of the Project, including delays that result in the commencement of the provision of Temporary Heat during a season that is later than that which may have been originally anticipated. The Contractor shall include in its Total Contract Price all expenses in connection with the provision of Temporary Heat in accordance with the requirements specified herein.
- 2. The total Contract duration is set forth in consecutive calendar days in Schedule A of the Addendum. The Table set forth below indicates the number of full heating seasons that are deemed included in various contract durations, which are specified in consecutive calendar days (ccds). At a minimum, a full heating season shall extend from October 15<sup>th</sup> to April 15<sup>th</sup>.

Contract Duration	Full Heating Seasons Required
up to 360 ccds	1 full heating season
360 to 720 ccds	2 full heating seasons
more than 720 ccds	3 full heating seasons

E. METHOD OF TEMPORARY HEAT:

- 1. The method of temporary heat shall be in conformance with the New York City Fire Code and with all applicable laws, rules and regulations. Prior to implementation, such method shall be subject to the written approval of the Commissioner.
- 2. The method of temporary heat shall:
  - a. Not cause the deposition of dirt or smudges upon any finished work or cause any defacement or discoloration to the finished work.
  - b. Not be injurious or harmful to people or materials.



- c. Portable fueled heating devices or equipment SHALL NOT BE ALLOWED for use as temporary heat other than construction-related curing or drying in conformance with the NYC Fire Code.
3. No open fires will be permitted.

F. TEMPORARY HEATING SYSTEM:

1. The temporary system for the provision of Temporary Heat provided by the Contractor following enclosure of the building shall be complete including, subject to provisions of paragraph E above, boilers pumps, radiators, space heaters, water and heating piping, insulation and controls. The temporary system for the provision of Temporary Heat shall be capable of maintaining the minimum temperature requirements set forth in Paragraph C above.

G. COORDINATION:

1. The Contractor, in the provision of Temporary Heat, shall coordinate its operations in order to insure sufficient and timely performance of all required work, including work performed by trade subcontractors. The Contractor shall supply and pay for all water required and used in the building for the operation of the heating system(s) for the purpose of Temporary Heat. The Contractor shall include all expenses in connection with the supply of water for Temporary Heat in its Total Contract Price. During the period in which Temporary Heat in an enclosed building is being furnished and maintained, the Contractor shall provide proper ventilating and drying, open and close the windows and other openings when necessary for the proper execution of the work and also when directed by DDC. The Contractor shall maintain all permanent or temporary enclosures at its own expense.

H. USE OF PERMANENT HEATING SYSTEMS:

1. Use of Permanent Heating System for Temporary Heat after Building Enclosure
  - a. The Contractor shall provide all labor and materials to promptly furnish and set all required equipment and convectors and/or radiators, piping, valves, fitting, etc., in ample time for their use for the provision of Temporary Heat after enclosure of the building.
  - b. New portions of the permanent heating system that are used for furnishing Temporary Heat shall be left in near perfect condition when delivered to the City for operation. Any repairs required, other than for ordinary wear and tear on the equipment, shall be made by the Contractor at his/her expense. The starting date for the warranty or guarantee period for such equipment shall be the date of Substantial Completion acceptance.
  - c. In the event that the Contractor does not advance the installation of the permanent heating system in sufficient time to permit its use for Temporary Heat as determined by DDC, the Contractor shall furnish and install a separate system for the provision of Temporary Heat as required to maintain the minimum temperature requirements set forth in Paragraph C above.
2. All equipment for the system for the provision of Temporary Heat shall be placed so as to comply with the requirements specified hereinbefore, and shall be connected, disconnected and suitably supported and located so as to permit construction work, including finish work such as wall plastering and painting, to proceed. The installation of the system for the provision of Temporary Heat by the Contractor, including the placing of ancillary system equipment, shall be coordinated with the operations of all trade subcontractors so as to insure sufficient and timely performance of the work. Once the permanent heating system is operating properly, the Contractor shall remove all portions of the system for Temporary Heat not part of the permanent heating system.
3. Temporary Heat Allowance for Special Conditions or and/or Unforeseen Circumstances.
  - a. The City may establish an allowance in the Contract for payment of costs and expenses in connection with the provision of Temporary Heat as set forth herein. If established, the City will include an amount for such allowance on the Bid Form, and the Contractor shall

include such allowance amount in its Total Contract Price. The Contractor shall only be entitled to payment from this allowance under the conditions and in accordance with the requirements set forth below. In the event this allowance or any portion thereof remains unexpended at the conclusion of the Contract, such allowance shall remain the sole property of the City. Should the amount of the allowance be insufficient to provide payment for the expenses specified below, the City will increase the amount of the allowance.

- b. The allowance set forth herein may be utilized only under the conditions set forth below.
  1. In the event the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, and the Commissioner determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat, as directed by the Commissioner. The City shall pay such Contractor for all costs for labor, material, and equipment necessary and required for the same. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
  2. In the event the Commissioner determines that there is a need for maintenance of the permanent heating system by the Contractor after written acceptance by the Commissioner of the work, and that the need for such maintenance is not the fault of the Contractor, the Contractor shall provide the required maintenance of the permanent heating system for the period of time directed by the Commissioner. The City shall pay the Contractor for the cost of direct labor and fuel necessary and required in connection with such maintenance, excluding the cost of any foremen or other supervision. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
- c. Payment for Fuel Costs - Payment from the allowance set forth herein for the cost of fuel necessary and required to operate the system for the provision of Temporary Heat or to maintain the permanent heating system under the conditions set forth in Paragraph b above shall be limited to the direct cost of such fuel. The Contractor shall not be entitled to any overhead and/or profit for such fuel costs. In order to receive payment for such fuel costs, the Contractor must present original invoices for the same. DDC reserves the right to furnish the required fuel.

I. RELATED ELECTRICAL WORK:

1. The Contractor shall be responsible for providing the items set forth below and shall include all expenses in connection with such items in its Total Contract Price. The Contractor shall provide such items promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
  - a. The Contractor shall provide all labor, materials, equipment and power necessary and required to furnish and maintain any temporary or permanent electrical connections to all equipment specified to be connected as part of the work of his Contract.
  - b. The Contractor shall supply and pay for all power necessary and required for the operation of the system for the provision of Temporary Heat and/or the permanent heating system used for Temporary Heat. Such power shall be provided by the Contractor for the duration the Contractor is required to provide Temporary Heat, as set forth in Sub-Section 3.5 D herein.
2. In providing the items set forth in Paragraph 1 above, the Contractor is advised that labor may be required seven (7) days a week and/or during other than normal working hours for the period of time required by seasonal weather conditions.

**J. RELATED PLUMBING WORK:**

1. The Contractor shall be responsible for providing all labor, materials and equipment necessary and required to furnish and maintain all temporary or permanent connections to all equipment or plumbing outlets specified to be provided as part of the work of this Contract. The Contractor shall include all expenses in connection with such items of work in its Total Contract Price. The Contractor shall provide such items of work promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
2. In the event portions of the permanent plumbing equipment furnished by the Contractor as part of the work of this Contract are used for the provision of Temporary Heat either during construction or prior to acceptance by the City of the complete plumbing system, the Contractor shall be responsible to provide such plumbing equipment to the City in near perfect condition and shall make any repairs required, other than for ordinary wear and tear on the equipment, at his expense. The starting date for warranty and/or guarantee period for such plumbing equipment shall be the date of Substantial Completion acceptance by the City.
3. For Projects requiring the installation of new and/or modified gas service, as well as associated meter installations, the Contractor shall promptly perform all required filings and coordination with the Utility Companies in order to expedite the installation, testing, and approval of the gas service and associated meter(s).

**3.6 STORM WATER CONTROL, DEWATERING FACILITIES AND DRAINS:**

**A. PUMPING:**

1. Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of storm water from heavy rainfall.
2. Contractor shall furnish and install all necessary automatically operated pumps of adequate capacity with all required piping to run-off agencies, so as to maintain the excavation, cellar floor, pits and exterior depressions and excavations free from accumulated water during the entire period of construction and up to the date of final acceptance of work of the Contract.
3. All pumps shall be maintained at all times in proper working order.
4. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties nor endanger permanent Work or temporary facilities.
5. Remove snow and ice as required to minimize accumulations.

**3.7 TEMPORARY FIELD OFFICE FOR CONTRACTOR:**

- A. The Contractor shall establish a temporary field office for its own use at the site during the period of construction, at which readily accessible copies of all Contract Documents shall be kept.
- B. The field office shall be located where it will not interfere with the progress of any part of the work or with visibility of traffic control devices.
- C. **CONTRACTOR'S REPRESENTATIVE:** In charge of the office there shall be a responsible and competent representative of the Contractor, duly authorized to receive orders and directions and to put them into effect.
- D. Arrangements shall be made by the Contractor whereby its representative may be readily accessible by telephone.
- E. All temporary structures shall be of substantial construction and neat appearance, and shall be painted a uniform gray unless otherwise directed by the Commissioner.
- F. **CONTRACTOR'S SIGN** - The Contractor shall post and keep posted, on the outside of its field office, office or exterior fence or wall at site of work, a legible sign giving full name of the company, address of the company and telephone number(s) of responsible representative(s) of the firm who can be reached in event of an emergency at any time.



- G. **ADVERTISING PRIVILEGES** - The City reserves the right to all advertising privileges. The Contractor shall not cause any signs of any kind to be displayed at the site unless specifically required herein or authorized by the Commissioner.

### 3.8 DDC FIELD OFFICE:

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 A**

- A. **OFFICE SPACE IN EXISTING BUILDING:**
1. The Resident Engineer will arrange for office space for sole use in the building where work is in progress. The Contractor shall provide and install a lockset for the door to secure the equipment in the room. The Contractor shall provide two (2) keys to the Resident Engineer. After completion of the project the Contractor shall replace the original lockset on the door and ensure its proper operation.
  2. In addition to equipment specified in Sub-Section 3.8 D, the Contractor shall provide, for exclusive use of the DDC Field Office, the following:
    - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two metal (2) lockers, single units, 15" x 18" x 78" overall including 6" legs. Lockers to have flat key locks with two (2) keys each, General Steel products or approved equal. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks, approximately 52"H x 28 1/2"D x 18"W.
    - b. One (1) 9000 B.T.U air conditioner or as directed by Commissioner. Wiring for the air conditioner shall be minimum No. 12 AWG fed from individual circuits in the fuse box.
    - c. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
    - d. Two (2) metal wastebaskets.
    - e. One (1) fire extinguisher, one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
    - f. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the project as required.
  3. The Contractor shall provide one (1) telephone, where directed and shall pay all costs for telephone service for calls within the New York City limits for the duration of the project.
  4. All furniture and equipment, except computer equipment specified in Sub-Section 3.8 D.3, shall remain the property of the Contractor.
  5. Computer Workstation quantities shall be provided as specified in Sub-Section 3.8 B 3-a for DDC Managed Projects, or Sub-Section 3.8 B 3-b for CM Managed projects.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 B**

- B. **DDC FIELD OFFICE TRAILER:**
1. **GENERAL:** The Contractor shall, for the time frame specified herein, provide and maintain at its own cost and expense a DDC Construction Field Office and all related items as specified herein [hereinafter collectively referred to as the "DDC Field Office"] for the exclusive use of the Resident Engineer. The DDC Field Office shall be located at the Project site and shall be solely dedicated to the Project. Provision of the DDC Field Office shall commence within THIRTY (30) days from Notice to proceed and shall continue through forty-five (45) days after Substantial Completion of the required construction at the Project site. The Contractor shall remove the DDC Field Office forty-five (45) days after Substantial Completion of the required construction, or as otherwise directed in writing by the Commissioner.
  2. **TRAILER:** The Contractor shall provide at its own cost and expense a mobile office trailer for use as the DDC Field Office. The Contractor shall install and connect all utility services to the



trailer within thirty (30) days from Notice to Proceed. The trailer shall have equipment in compliance with the minimum requirements hereinafter specified. Any permits and fees required for the installation and use of said trailer shall be borne by the Contractor. The trailer including furniture and equipment therein, except computer equipment specified in Sub-Section 3.8D.3 herein, shall remain the property of the Contractor.

- 3. Trailer shall be an office type trailer of the size specified herein, with exterior stairs at entrance. Trailer construction shall be minimum 2 x 4 wall construction fully insulated with paneled interior walls, pre-finished gypsum board ceilings and vinyl tile floors.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8.B.3a or  
SUB-SECTION 3.8.B.3b.**

- a. DDC Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
  - 1) Overall length: 32 Feet  
Overall width: 10 Feet
  - 2) Interior Layout:  
Provide one (1) general office/conference room area and one (1) private office at one end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
  - 3) Computer Workstation: Provide one (1) complete computer workstation, as specified in Sub-Section 3.8.D herein, in the private office area as directed by the Resident Engineer.
  
- b. CM Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
  - 1) Overall length: 50 Feet  
Overall width: 10 Feet
  - 2) Interior Layout:  
Provide one (1) large general office/conference room in the center of the trailer and two (2) private offices, one (1) each at either end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
  - 3) Computer Workstation:  
Provide three (3) complete computer workstations as specified in Sub-Section 3.8.D herein. Provide one (1) each complete computer workstation in each private office and one (1) complete computer workstation at the secretarial position as directed by the Resident Engineer.

- 4. The exterior of the trailer shall be lettered with black block lettering of the following heights with white borders:

CITY OF NEW YORK	2-1/2"
DEPARTMENT OF DESIGN AND CONSTRUCTION	3-3/4"
DIVISION OF PUBLIC BUILDINGS	3-1/2"
DDC FEILD OFFICE	2-1/2"

NOTE: In lieu of painting letters on trailer the Contractor may substitute a sign constructed of a good quality weatherproof material with the same type and size of lettering above.

- 5. All windows and doors shall have aluminum insect screens. Provide wire mesh protective guards at all windows.
- 6. The interior shall be divided by partitions into general and private office areas as specified herein. Provide a washroom located adjacent to the private office and a built-in wardrobe closet opposite the washroom. Provide a built-in desk in the private office(s) with fixed overhead shelf and clearance below for two (2) file cabinets.



7. Provide a built-in drafting or reference table, located in the general office/conference room, at least 60 inches long by 36 inches wide with cabinet below and wall type plan rack at least 42 inches wide.
8. The washroom shall be equipped with a flush toilet, wash basin with two (2) faucets, medicine cabinet, complete with supplies and a toilet roll tissue holder. Plumbing and fixtures shall be approved house type, with each appliance trapped and vented and a single discharge connection. Five (5) gallon capacity automatic electric heater for domestic hot water shall be furnished.
9. HVAC: The trailer shall be equipped with central heating and cooling adequate to maintain a temperature of 72 degrees during the heating season and 75 degrees during the cooling season when the outside temperature is 5 degrees F. winter and 89 degrees F. summer.
10. Lighting shall be provided via ceiling mounted fluorescent lighting fixtures to a minimum level of 50 foot candles in the open and private office(s) along with sufficient lighting in the washroom. Broken and burned out lamps shall be replaced by the Contractor. A minimum of four (4) duplex convenience outlets shall be provided in the open office and two (2) each in the private office(s). These outlets shall be in addition to special outlet requirements for computer stations, copiers, HVAC unit, etc.
11. Electrical service switch and panel shall be adequately sized for the entire trailer load. Provide dedicated circuits for HVAC units, hot water heater, copiers and other equipment as required. All wiring and installation shall conform to the New York City Electrical Code.
12. The following movable equipment shall be furnished:
  - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks and two (2) full ball bearing two (2) drawer vertical legal filing cabinets in each private office located below built-in desk.
  - b. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
  - c. Three (3) metal wastebaskets.
  - d. One (1) fire extinguisher one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
  - e. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the Contract as required.
13. TRAILER TEMPORARY SERVICE: Plumbing and electrical work required for the trailer will be furnished and maintained as below.
  - a. PLUMBING WORK: The Contractor shall provide temporary water and drainage service connections to the DDC Field Office trailer for a complete installation. Provide all necessary soil, waste, vent and drainage piping.

Contractor to frost-proof all water pipes to prevent freezing.

    - 1) REPAIRS, MAINTENANCE: The Contractor shall provide repairs for the duration of the project until the trailer is removed from the site.
    - 2) DISPOSITION OF PLUMBING WORK: At the expiration of the time limit set forth in Article 3.8 A.14(c).4 herein, the temporary water and drainage connections and piping to the DDC Field Office trailer shall be removed by the Contractor and shall be plugged at the mains. All piping shall become the property of the Contractor for Plumbing Work and shall be removed from the site, all as directed. All repair work due to these removals shall be the responsibility of the Contractor.
  - b. ELECTRICAL WORK:
    - 1) The Contractor shall furnish, install and maintain a temporary electric feeder to the DDC Field Office trailer immediately after it is placed at the job site.
    - 2) The temporary electrical feeder and service switch/fuse shall be adequately sized based on the trailer load and installed per the New York City Electrical Code and complying with utility requirements.



- 3) Make all arrangements and pay all costs to provide electric service.
  - 4) The Contractor shall pay all costs for current consumed and for maintenance of the system in operating condition, including the furnishing of the necessary bulb replacements lamps, etc., for the duration of the project and for a period of forty-five (45) days after the date of Substantial Completion.
  - 5) Disposition of Electric Work: At the expiration of the time limit set forth, the temporary feeder, safety switch, etc., shall be removed and disposed of as directed.
  - 6) All repair work due to these removals shall be the responsibility of the Contractor.
- c. MAINTENANCE
- 1) The Contractor shall provide and pay all costs for regular weekly janitor service and furnish toilet paper, sanitary seat covers, cloth towels and soap and maintain the DDC Field Office in first-class condition, including all repairs, until the trailer is removed from the site.
  - 2) Supplies: The Contractor shall be responsible for providing (a) all office supplies, including without limitation, pens, pencils, stationery, filtered drinking water and sanitary supplies, and (b) all supplies in connection with required computers and printers, including without limitation, an adequate supply of blank CD's/DVD's, storage boxes for blank CDs/DVDs, and paper and toner cartridges for the printer.
  - 3) Risk of Loss: The entire risk of loss with respect to the DDC Field Office and equipment shall remain solely and completely with the Contractor. The Contractor shall be responsible for the cost of any insurance coverage determined by the Contractor to be necessary for the Field Office.
  - 4) At forty-five (45) days after the date of Substantial Completion, or sooner as directed by the Commissioner, the Contractors shall have all services disconnected and capped to the satisfaction of the Commissioner. All repair work due to these removals shall be the responsibility of the Contractor.
- d. TELEPHONE SERVICE: The Contractor shall provide and pay all costs for the following telephone services for the DDC Field Office trailer:
- 1) Separate telephone lines for one (1) desk phone in each private office.
  - 2) One (1) wall phone (with six (6) foot extension cord) at plan table.
  - 3) Separate telephone lines for the fax machine and internet access in each private office. Telephone service shall include voice mail.
  - 4) A remote bell located on outside of trailer
  - 5) The telephone service shall continue until the trailer is removed from the site.
- e. PERMITS: The Contractor shall make the necessary arrangements and obtain all permits and pay all fees required for this work.
- C. RENTED SPACE: The Contractor has the option of providing, at its cost and expense, rented office or store space in lieu of trailer. Said space shall be in the immediate area of the Project and have adequate plumbing, heating and electrical facilities. Space chosen by the Contractor for the DDC Field Office must be approved by the Commissioner before the area is rented. All insurance, maintenance and equipment, including computer workstations specified in Sub-Section 3.8 D in quantities required as specified in Sub-Section 3.8 B 3 for the DDC Field Office trailer, shall also apply to rented spaces.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 D**

- D. ADDITIONAL EQUIPMENT FOR THE DDC FIELD OFFICE:
1. The Contractor shall provide a high volume copy machine (50 copies per minute) for paper sizes 8½ x 11, 8½ x 14 & 11 x 17. Copier shall remain at job site until the DDC Field office trailer is removed from the site.





2. The Contractor shall furnish a fax machine and a telephone answering machine at commencement of the project for the exclusive use of the DDC Field Office. All materials shall be new, sealed in manufacturer's original packaging and shall have manufacturers' warranties. All items shall remain the property of the City of New York at the completion of the project.
3. **COMPUTER WORKSTATION:** The Contractor shall provide a complete computer workstation as specified herein:
  - a. **Hardware/Software Specification:**
    - 1) **Computer Equipment** - Computers shall be provided for all contracts that have a Total Consecutive Calendar Days for construction duration as set forth in Schedule "A" of 180 CCD's or greater. Contracts of lesser duration shall not require computers.
    - 2) Computers furnished by the Contractor for use by City Personnel, for the duration of the contract, shall be in accordance with Specific Requirements, contained herein, shall remain the property of the City of New York at the completion of the project and shall meet the following minimum requirements:
    - 3) **Personal Computer(s) – Each Workstation Configuration.**
      - a) **Make and Model:** Dell; HP; Gateway; Acer; or, an approved equivalent. (Note: an approved equivalent requires written approval of the Assistant Commissioner of ITS.)
      - b) **Processor:** i5-2400 (6MB Cache, 3.1GHz) or faster computer - Single Processor.
      - c) **System RAM:** Minimum of 4GB (Gigabytes) Dual Channel DDR3 SDRAM at 1333MHz – 2 DIMMSs
      - d) **Hard Disk Drive(s):** 500 GB (Gigabytes) Serial ATA (7200RPM) w/DataBurst Cache, or larger.
      - e) **CD-RW:** Internal CD-RW, 48x Speed or faster.
      - f) **16xDVD+/-RW** DVD Burner (with double layer write capability) 16x Speed or faster
      - g) **I/O Ports:** Must have at least one (1) Serial Port, one (1) Parallel Port, and three (3) USB Ports.
      - h) **Video Display Card:** HD Graphics (VGA, HDMI) with a minimum of 64 MB of RAM.
      - i) **Monitor:** 22" W, 23.0 Inch VIS, Widescreen, VGA/DVI LCD Monitor.
      - j) **Available Exp. Slots:** System as configured above shall have at least two (2) full size PCI Slots available.
      - k) **Network Interface:** Integrated 10/100/1000 Ethernet card.
      - l) **Other Peripherals:** Optical scroll Mouse, 101 Key Keyboard, Mouse Pad and all necessary cables.
      - m) **Software Requirement:** Microsoft Windows 7 Professional SP1, 32 bit; Microsoft Office Professional 2010 or 2013; Microsoft Project 2010; Adobe Acrobat reader; Anti-Virus software package with 2 year updates subscription; and, either Auto Cad LT or Microsoft



Visio Standard Edition, as directed by the Resident Engineer.

- 4) DDC Field Office Specs: DDC Field Offices requiring computers shall be provided with the following:
  - a) One (1) broad-band internet service account. Wideband Internet connectivity at a minimum throughput of 15 Mbps download and 5 Mbps upload is required at each field office location with 1-5 staffers. For larger field offices see table below for minimum required upload speeds. Telephone service should be bundled together with Internet connectivity. Because of throughput requirements Verizon FIOS is the preferred connectivity provider where available.

Office Personnel #	Upload Speeds (Minimum)
1 – 5	5 Mbps
6 – 10	10 Mbps
11 – 15	15 Mbps
16 – 20 ...	20 Mbps

This account will be active for the life of the project. The e-mail name for the account shall be the DDC Field Office/project Id (e.g. FLD K HWK666 McGuinness@earthlink.com).

- b) One (1) 600 DPI HP Laser Jet Printer (twelve (12) pages per minute or faster) with one (1) Extra Paper (Legal Size)
  - c) All necessary cabling for equipment specified herein.
  - d) Storage Boxes for Blank CD's
  - e) Printer Table
  - f) UPS/Surge Suppressor combo
- 5) All computers required for use in the Engineer's Field Office shall be delivered, installed, and setup in the Field Office by the Contractor.
- 6) All Computer Hardware shall come with a three (3) year warranty for on-site repair or replacement. Additionally, and notwithstanding any terms of the warranty to the contrary, the Contractor is responsible for rectifying all computer problems or equipment failures within one (1) business day.
- 7) An adequate supply of blank CDs/DVDs, and paper and toner cartridges for the printer shall be provided by the Contractor, and shall be replenished by the Contractor as required by the Resident Engineer.
- 8) It is the Contractor's responsibility to ensure that electrical service and phone connections are also available at all times; that is, the Field Office Computer(s) is to be powered and turned on twenty-four (24) hours each day.
- 9) Broadband connectivity is preferred at each field office location. Please take into consideration that an extra phone line dedicated to the modem must be ordered as part of the contract unless Internet broadband connectivity, via Cable or DSL, is available at the planned field office location. Any questions regarding this policy should be directed to the Assistant Commissioner of Information Technology Services at 718-391-1761.
- 10) Ownership: The equipment specified above shall, unless otherwise directed by the Commissioner, be the sole property of the City of New York upon delivery to the DDC Field Office. The Contractor shall prepare and maintain an accurate inventory of all equipment which it purchases for the DDC Field Office. Such inventory shall be provided to the City of New York. Upon completion of the

required services, as directed by the Commissioner, the Contractor shall turn such equipment over to the City of New York.

**E. HEAD PROTECTION (HARD HATS):**

1. The Contractor shall provide a minimum of 10 standard protective helmets for the exclusive use of Department of Design and Construction personnel and their visitors. Helmets shall be turned over to the Resident Engineer and kept in the DDC Field Office.
2. Upon completion of the project, the helmets shall become the property of the Contractor.

**3.9 MATERIAL SHEDS:**

- A. Material sheds used by the Contractor for the storage of its materials shall be kept at locations which will not interfere at any time with the progress of any part of the work or with visibility of traffic control devices.
- B. Store combustible materials apart from the facility.

**3.10 TEMPORARY ENCLOSURES:**

- A. Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weather tight enclosure for building exterior.
- B. Where heating or cooling is needed and permanent enclosure is not complete, insulate temporary enclosures.

**3.11 TEMPORARY PARTITIONS:**

- A. Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate occupied tenant areas from fumes and noise.
  1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant plywood on construction operations side.
  2. Construct dustproof partitions with 2 layers of 3-mil (0.07-mm) polyethylene sheet on each side. Cover floor with 2 layers of 3-mil (0.07-mm) polyethylene sheet, extending sheets 18 inches (460 mm) up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant plywood.
    - a. Construct vestibule and airlock at each entrance through temporary partition with not less than 48 inches (1219 mm) between doors. Maintain water-dampened foot mats in vestibule.
  3. Insulate partitions to provide noise protection to occupied areas.
  4. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
  5. Protect air-handling equipment.
  6. Weather strip openings.
  7. Provide walk-off mats at each entrance through temporary partition.

**3.12 TEMPORARY FIRE PROTECTION:**

- A. Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.
- B. Prohibit smoking in all areas.
- C. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.

- D. Develop and supervise an overall fire-prevention and protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- E. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13**

**3.13 WORK FENCE ENCLOSURE:**

- A. The Contractor shall furnish, erect and maintain a wood construction or chain-link fence to the extent shown on the drawings or required by the work enclosing the entire project on all sides. All materials used shall be new. Any permit required for the installation and use of said fence and costs shall be borne by the Contractor.
- B. WOOD FENCE shall be 7'-0" high with framing construction of yellow pine, using 4" x 4" approved preservative-treated posts on not more than 6'-0" centers, with three (3) rails of at least 2" x 4" size to which shall be secured minimum 1/2 inch thick exterior grade plywood. Posts shall be firmly fixed in the ground at least 30" and thoroughly braced. Top edge of fence shall be trimmed with a rabbeted edge mould. Provide on the street traffic sides of fence, observation openings as directed.
  - 1. GATES - Provide an adequate number of double gates, complete with hardware, located as approved by the Resident Engineer. Double gates shall have a total clear opening of 14'-0" with two (2) 7'-0" hinged swinging sections. Hanging posts shall be 6" x 6" and shall extend high enough to receive and be provided with tension or sag rods for the swinging sections.
  - 2. PAINTING - The fence and gates shall be entirely painted on the street and public sides with one (1) coat of exterior primer and one (1) top coat of exterior grade acrylic-latex emulsion paint. Black stenciled signs reading "POST NO BILLS" shall be painted on fence with three (3) inch high letters on 25 foot spacing for the entire length of fence on street traffic sides. Signs shall be stenciled five (5) feet above the sidewalk.
- C. CHAIN-LINK FENCING shall be minimum 2-inch thick, galvanized steel, chain-link fabric fencing; 8 feet high with galvanized steel pipe posts; minimum 2-3/8-inch OD line posts and 2-7/8-inch OD corner and pull posts, with 1-5/8-inch OD top and bottom rails. Fence shall be accurately aligned and plumb, adequately braced and complete with gates, locks and hardware as required. Under no condition shall fencing be attached or anchored to existing construction or trees.
- D.
  - 1. It shall be the obligation of the Contractor to remove all posters, advertising signs, and markings, etc., immediately.
  - 2. Should the fencing be required to be relocated during the course of the Contract, it shall be done by the Contractor at no additional cost to the City.
  - 3. Where sidewalks are used for "drive over" purposes for Contractor vehicles, a suitable wood mat or pad shall be provided for protection of sidewalks and curbs.
  - 4. Where required, make provision for fire hydrants, lampposts, etc.
  - 5. REMOVAL - When directed by the Resident Engineer, the fence shall be removed.

**3.14 RODENT AND INSECT CONTROL:**

- A. DESCRIPTION: The Contractor shall provide all labor, materials, plant and equipment, and incidentals required to survey and monitor rodent activity and to control any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. Special attention should be paid to the following conditions or areas:



1. Wet areas within the project area, including all temporary structures.
2. All exterior and interior temporary toilet structures within the project area.
3. All Field Offices and shanties within the project area of all subcontractors and DDC.
4. Wherever there is evidence of food waste and/or discarded food or drink containers, in quantity, that would cause breeding of rodents or the insects herein specified.
5. Any other portion of the premises requiring such special attention.

**B. MATERIALS:**

1. All materials shall be approved by the New York State Department of Environmental Conservation and comply with the New York City Health Code, OSHA and the laws, ordinances and regulations of State and Federal agencies pertaining to such chemical and/or materials.

**C. PERSONNEL:**

1. All pest control personnel must be supervised by an exterminator licensed in categories 7A and 8.

**D. METHODS:**

1. Application and dosage of all materials shall be done in strict compliance with the manufacturer's recommendations.
2. Any unsanitary conditions, such as uncollected garbage or debris, resulting from all Contractor's activities, which will provide food and shelter to the resident rodent population shall be corrected by the Contractor immediately after notification of such condition by the Resident Engineer.

**E. RODENT CONTROL WORK:**

1. In wetlands, woodlands and areas adjacent to a stream, special precautions must be taken to protect water quality and to ensure the safety of other wildlife. To prevent poisoned bait from entering streams, no poisoned bait shall be used in areas within seventy-five (75) feet of all stream banks. Live traps must be used in these seventy-five (75) foot buffer zone areas and within wetland and woodland areas.
2. In areas outside the seventy-five (75) foot zone of protection adjacent to streams, and in areas outside wetlands and woodlands, tamper proof bait stations with poisoned bait shall be placed during the period of construction and any consumed or decomposed bait shall be replenished as directed.
3. At least one month prior to initiation of the construction work, and periodically thereafter, live traps and/or rodenticide bait in tamper proof bait stations, as directed above, shall be placed at locations that are inaccessible to pets, human beings, children and other non-target species, particularly wildlife (for example-birds) in the project area.
4. The Contractor shall be responsible for collecting and disposing of all trapped and poisoned rodents found in live traps and tamper proof bait stations. The Contractor shall also be responsible for posting and maintaining signs announcing the baiting of each particular location.  
The Contractor shall be responsible for the immediate collection and disposal of any visible rodent remains found on streets or sidewalks within the project area.
5. It is anticipated that public complaints will be addressed to the Commissioner. The Contractor, where directed by the Commissioner, shall take appropriate actions, like baiting, trapping, proofing, etc., to remedy the source of complaint within the next six (6) hours of normal working time which is defined herein for the purposes of this section as 7 A.M. to 6 P.M. on Mondays through Saturdays.
6. Emergency service during the regular workday hours (Monday through Friday) shall be rendered within 24 hours, if requested by the Commissioner, at no additional cost to the City.



F. EDUCATION & NOTICES:

1. The Contractor shall post notices on all Construction Bulletin Boards advising workers, employees, and residents to call the Engineer's Field Office to report any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. The Contractor shall provide and distribute literature pertaining to IPM techniques of rodent control to affected businesses and superintendents of nearby residential buildings to ensure their participation in maintaining their establishments free of unsanitary conditions, harborage removal and rodent proofing.
2. Prior to application of any chemicals, the Contractor shall furnish to the Commissioner copies or sample labels for each pesticide, antidote information, and Material Data Safety Sheets (MSDS) for each chemical used.

G. RECORDS

1. The Contractor shall keep a record of all rodent and waterbug infestation surveys conducted by him/her and make available, upon request, to the Commissioner. The findings of each survey shall include, but not be limited to, recommended Integrated Pest Management (IPM) techniques, like baiting, trapping, proofing, etc., proposed for rodent and waterbug pest control.
2. The Contractor shall maintain records of all locations baited along with the type and quantity of rodenticide and insecticide bait used.

**3.15 PLANT PEST CONTROL REQUIREMENTS and TREE PROTECTION REQUIREMENTS:**

A. Plant Pest Control Requirements: The Contractor and its subcontractors, including the Certified Arborist described below, shall comply with all Federal and New York State laws and regulations concerning Asian Longhorned Beetle (ALB) management, including protocols for ALB eradication and containment promulgated by the New York State Department of Agriculture and Markets (NYSDAM). The Contractor is referred to: (1) Part 139 of Title 1 NYCRR, Agriculture and Markets Law, Sections 18, 164 and 167, as amended, and (2) State Administrative Procedure Act, Section 202, as amended.

1. All tree work performed within the quarantine areas must be performed by New York State Department of Agriculture and Markets (NYSDAM) certified entities. Transportation of all host material, living, dead, cut or fallen, inclusive of nursery stock, logs, green lumber, stumps, roots, branches and debris of a half inch or more in diameter from the quarantine areas is prohibited unless the Contractor or its sub-contractor performing tree work has entered into a compliance agreement with NYSDAM. The terms of said compliance agreement shall be strictly complied with. Any host material so removed shall be delivered to a facility approved by NYSDAM. For the purpose of this contract host material shall be ALL species of trees.
2. Any host material that is infested with the Asian Longhorned Beetle must be immediately reported to NYSDAM for inspection and subsequent removal by either State or City contracts, at no cost to the Contractor.
3. Prior to commencement of tree work, the Contractor shall submit to the Commissioner a copy of a valid Asian Longhorned Beetle compliance agreement entered into with NYSDAM and the Contractor or its sub-contractor performing tree work. If any host material is transported from the quarantine area the Contractor shall immediately provide the Commissioner with a copy of the New York State 'Statement of Origin and Disposition' and a copy of the receipt issued by the NYSDAM approved facility to which the host materials are transported.
4. Quarantine areas, for the purpose of this contract shall be defined as all five boroughs of the City of New York. In addition, prior to the start of any tree work, the Contractor shall contact the

NYC Department of Parks & Recreation's Director of Landscape Management at (718) 699-6724, to determine the limits of any additional quarantine areas that may be in effect at the time when tree work is to be performed. The quarantine area may be expanded by Federal and State authorities at any time and the Contractor is required to abide by any revisions to the quarantine legislation while working on this contract. For further information please contact: NYSDAM (631) 288-1751.

- B. Tree Protection Requirements: The Contractor shall retain a Certified Arborist, as defined by New York City Department of Parks and Recreation (NYCDPR) regulations, to provide the services described below.
1. Surveys and Reports: The Certified Arborist shall, at the times indicated below, conduct a survey and prepare a plant material assessment report which includes: (1) identification, by species and pertinent measurements, of all plant material located on the project site, or in proximity to the project site, as described below, including all trees, significant shrubs and/or planting masses; (2) identification and plan for the containment of plant pests and pathogens, including the ALB, as described in paragraph A above; (3) evaluation of the general health and condition of any infected plant material.
  2. Frequency of Reports: The Certified Arborist shall conduct a survey and provide a plant material assessment report at two (2) points in time: (1) prior to the commencement of construction work; and (2) at the time of substantial completion. In addition, for projects exceeding 24 months in duration, the Certified Arborist shall conduct a survey and prepare a report at the midpoint of construction. Copies of each plant material assessment report shall be submitted to the Resident Engineer within two (2) weeks of the survey.
  3. Proximity to Project Site: Off-site trees, significant shrubs and/or planting masses shall be considered to be located in proximity to the project site under the circumstances described below.
    - a. The tree trunk, significant shrub, or primary cluster of stems in a planting mass is within 50 (fifty) feet of the project's Contract Limit Lines (CLLs) or Property Lines (PLs).
    - b. Any part of the tree or shrub stands within 50 (fifty) feet of: (a) a path for site access for vehicles and/or construction equipment; or (b) scaffolding to be erected for construction activity, including façade remediation projects.
    - c. The Certified Arborist determines that the critical root zone (CRZ) of an off-site tree, significant shrub, or primary cluster of stems in a planting mass extends into the project site, whether or not that plant material is located within the 50-foot inclusionary perimeter as outlined above.
  4. Tree Protection Plan: The Certified Arborist shall prepare, and the Contractor shall implement, a Tree Protection Plan, for all trees that may be affected by any construction work, excavation or demolition activities, including without limitation, (1) on-site trees, (2) street trees, as defined below, (3) trees under NYCDPR jurisdiction as determined by the Department of Transportation, and (4) all trees that are located in proximity to the project site, as defined above. The Tree Protection Plan shall comply with the NYC DPR rules, regulations and specifications. The Contractor is referred to Chapter 5 of Title 56 of the Official Compilation of the Rules of the City of New York. Copies of the Tree Protection Plan shall be submitted to the Resident Engineer prior to the commencement of construction. Implementation of the Tree Protection Plan for street trees and trees under NYCDPR jurisdiction shall be in addition to any tree protection requirements specified or required for the project site. For the purpose of this article, a "street tree" means the following: (1) a tree that stands in a sidewalk, whether paved or unpaved, between the curb lines or lateral lines of a roadway and the adjacent property lines

of the project site, or (2) a tree that stands in a sidewalk and is located within 50 feet of the intersection of the project's site's property line with the street frontage property line.

- C. No Separate Payment. No separate payment shall be made for compliance with Plant Pest Control Requirements or Tree Protection Requirements. The cost of compliance with Plant Pest Control Requirements and Tree Protection Requirements shall be deemed included in the Contractor's bid for the Project.

### 3.16 PROJECT IDENTIFICATION SIGNAGE:

- A. The Contractor shall provide, install and maintain Project identification and other signs where indicated to inform public and individuals seeking entrance to the Project.
- B. In order to properly convey notice to persons entering upon a City construction site, the Contractor shall furnish and install a sign at the entrance (gates) as follows:

---

**NO TRESPASSING**

**AUTHORIZED PERSONNEL ONLY**

---

- C. If no construction fence exists at the site, this notice shall be conveyed by incorporating the above language into safety materials (barriers, tape, and signs).
- D. Provide temporary, directional signs for construction personnel and visitors.
- E. Maintain and touch up signs so that they are legible at all times.

### 3.17 PROJECT CONSTRUCTION SIGN AND RENDERING:

- A. PROJECT SIGN:
- 1 Responsibility: The Contractor shall produce and install one (1) project sign which shall be posted and maintained upon the site of the project at a place and in a position directed by the Commissioner. The Contractor shall protect the sign from damage during the continuance of work under the Contract and shall do all patching of lettering, painting and bracing thereof necessary to maintain the sign in first class condition and in proper position. Prior to fabrication, the Contractor shall submit an 8-1/2" x 11" color match print proof from the sign manufacturer of the completed sign for approval by the Commissioner.
  - 2 Sign Quality: The Contractor shall provide all materials required for the production of the sign as specified herein. Workmanship shall be of the best quality, free from defects and shall be produced in a timely manner.
  - 3 Schedule: Upon project mobilization, the Contractor shall commence production and installation of the sign.
  - 4 Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project sign away from the site.
  - 5 Sign construction:
    - a. Frame: The frame shall be from quality dressed 2"x2" pine, fire retardant, pressure treated lumber, that surrounds the inside back edge of the sign. The sign shall have one (1) intermediate vertical and two (2) diagonal supports, glued and screwed for rigidity. Frame shall be painted white with two (2) coats of exterior enamel paint, prior to mounting of sign panel.
    - b. Edging: U-shaped, 22 gauge aluminum edging, with a white enameled finish to match sign



background, shall run around entire edging of sign panel and frame. Corners shall be mitered for a tight fit. Channel dimensions shall be 1" inch (overlap to sign panel face) x 1 3/4" (or as required across frame depth) x 1" (back overlap).

- c. Sign Panel: 4' x 8' panel shall be constructed in one (1) piece of 14 gauge (.0785") 6061-T6 aluminum. This panel shall be pre-finished both sides with a glossy white baked-on enamel finish and be flush with edge of 2" x 2" wood frame. Samples must be submitted for approval.
  - d. Fastening: Fasten sign panel to wood frame using cadmium plated no. 8 sheet metal screws at 1/2" below edge of panel and 8" on center. The U-shaped aluminum channel shall be applied over the wood frame edge and fastened with cadmium plated no. 8 sheet metal screws at 12" on center around the entire perimeter.
- 6 Sign Graphics:
- a. A digital file of the project sign will be provided to the Contractor by the Commissioner's representative for printing. The Commissioner's representative shall insert the project name and names and titles of personnel (3 or more) and any other required information associated with the project. All signs may include a second panel for a project rendering as described in Sub-Section 3.17.B herein.
  - b. The digital file shall be reproduced at the Sign Panel size of 4' x 8' on 3M High Performance Vinyl or approved equal. The 3M High Performance Vinyl or equivalent shall be guaranteed for nine (9) years. Guarantee must cover fading, peeling, chipping or cracking. The sign manufacturer is required to maintain all specified Pantone Matching System (PMS) type and other composition elements represented in the digital file of the project sign.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.17 B**

**B. PROJECT RENDERING:**

1. Responsibility: In addition to the Project Sign, the Contractor shall furnish and install one (1) sign showing a rendering of the project. A digital file of the project rendering will be provided to the Contractor by the Commissioner's representative. From an approved image file provided by DDC, the Project Rendering is to be sized, printed, and mounted in an identical manner as described in Sub-Section 3.17.A above for the Project Sign. A color match print proof from the sign manufacturer of the Rendering Sign printed from the supplied file is to be submitted to DDC for approval before fabrication. The Rendering Sign is to be posted at the same height as the Project Sign. Where possible, the Rendering Sign shall be mounted with a perfect match of the short sides of the rectangle so that the Rendering Sign and the Project Sign together will create one long rectangle.
2. Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project rendering away from the site.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.18**

**3.18 SECURITY GUARDS/FIRE GUARDS ON SITE:**

**A. SECURITY GUARDS (WATCHMEN):**

1. The Contractor shall provide competent Security Guard Service on the site, beginning on the date on which the Contractor commences actual construction work, or on such earlier date on which there is activity at the site related to the work, including without limitation, delivery of

materials or construction set-up. The Contractor shall continue to provide such Security Guard Service until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. Throughout the specified time period, there shall be no less than one (1) Security Guard on duty every day, including Saturdays, Sunday and Holidays, 24 hours a day, except between the hours of 8:00 A.M. and 4:00 P.M. on any day which is a regular working day for a majority of the trade subcontractors. This exception during the working day shall not apply after the finishing painting of the plaster work is commenced; thereafter, not less than one (1) Security Guard shall be on duty continuously, 24 hours a day.

2. Every Security Guard shall be required to hold a "Certificate of Fitness" issued by the Fire Department. Every Security Guard shall, during his/her tour of duty, perform the duties of Fire Guard in addition to his/her security obligations.
  3. Should the Commissioner find that any Security Guard is unsatisfactory; such guard shall be replaced by the Contractor upon the written demand of the Commissioner.
  4. Each Security Guard furnished by the Contractor shall be instructed by the Contractor to include in his/her duties the entire construction site including the Field Office, temporary structures, and equipment, materials, etc.
  5. Should the Contractor or any other subcontractor consider the security requirements outlined above inadequate, the Contractor shall provide such additional security as it thinks necessary, after obtaining the written consent of the Commissioner. The additional cost of such approved increased protection will be paid by the Contractor.
  6. Nothing contained in this Sub-Section shall diminish in any way the responsibility of the Contractor and each subcontractor for its own work, materials, tools, equipment, nor for any of the other risks and obligations outlined hereinbefore in this Article.
- B. COSTS - The Contractor shall employ Security Guards/Fire Guards throughout the specified time period, except as otherwise modified by the detailed Specifications and as approved by the Commissioner, for the purpose of safeguarding and protecting the site. All costs for Security Guards/Fire Guards shall be borne by the Contractor.
- C. RESPONSIBILITY - The Contractor and its subcontractors will be responsible for safeguarding and protecting their own work, materials, tools and equipment.

### 3.19 SAFETY:

- A. The Contractor, in compliance with requirements of Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES, shall provide and maintain all necessary temporary closures, guard rails, and barricades to adequately protect all workers and the public from possible injury. Any removal of these items, during the progress of the work, shall be replaced by the Contractor at no additional cost to the City.

END OF SECTION 01 50 00



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

TEMPORARY FACILITIES, SERVICES AND CONTROLS  
01 50 00 -28



**SECTION 01 54 11**  
**TEMPORARY ELEVATORS AND HOISTS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This section includes the following:
1. Temporary Use, Operation and Maintenance of Elevators during Construction
    - a. For New Buildings up to 15 Stories
    - b. For New Buildings over 15 Stories
    - c. For Existing Buildings
  2. Temporary Construction Hoists and Hoist ways (For Material and Personnel)

**1.3 RELATED SECTIONS:** include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 50 00 TEMPORARY FACILITIES AND CONTROLS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION**

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.1**

**3.1 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDINGS UP TO AND INCLUDING 15 STORIES:**

- A. **INSTALLATION:** The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, one (1) selected main elevator for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevator in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevator and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.
- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.

- C. **COSTS:** The Contractor shall be responsible for all costs in connection with the temporary elevator, including without limitation: (1) installing and operating the temporary elevator, (2) maintaining the temporary elevator in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevator, (4) replacing the temporary elevator or any equipment or parts utilized in connection therewith, if required, due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevator, (6) providing all electric power required to operate the temporary elevator, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevator, and (8) providing all labor for the operation and maintenance of the temporary elevator, including on an overtime basis if necessary. The total Contract Price shall include all costs in connection with the temporary elevator, including without limitation, the costs specified herein.
- D. **COMMENCEMENT OF SERVICE:** The Contractor shall begin to provide temporary elevator service using the selected main passenger elevator no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or a temporary enclosure meeting the requirements of the law.
  2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
  3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks and any necessary approved wire mesh barricades for adjacent shaft ways.
  4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room roof slab or that portion of its surrounding the elevator has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the machine room to the low voltage transformers and car light outlets in the center of shaft way and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- F. **REMOVAL:** When elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment and promptly proceed with the installation of the permanent equipment as required under the Contract.
- G. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection deems it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables and new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.

- H. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned. Where lubricated rails are used they shall be washed down. If roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- I. **LIMITATIONS ON USE:** The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- J. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this section beginning with the 41<sup>st</sup> working day after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2**

**3.2 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDING OVER 15 STORIES:**

- A. **INSTALLATION:** The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, two (2) selected main elevators for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevators in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevators and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use. The two (2) elevators shall not be operated simultaneously.
- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevators and all equipment and/or parts utilized in connection therewith.
- C. **COSTS:** The Contractor shall be responsible for all costs in connection with the temporary elevators, including without limitation: (1) installing and operating the temporary elevators, (2) maintaining the temporary elevators in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevators, (4) replacing the temporary elevators or any equipment or parts utilized in connection therewith, if required due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevators, (6) providing all electric power required to operate the temporary elevators, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevators, and (8) providing all labor for the operation and maintenance of the temporary elevators, including on an overtime basis if necessary. The total Contract Price shall



- include all costs in connection with the temporary elevators, including without limitation, the costs specified herein.
- D. **LOW RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service using one (1) selected main passenger elevator no later than six (6) weeks (30 working days) after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. No later than one (1) week, five (5) working days, after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped the following work shall have been completed:
1. The shaft shall have been completely enclosed up to the 12th Floor by either the permanent or a temporary enclosure meeting the requirements of the law.
  2. A temporary machine room enclosure shall have been provided at the 11th Floor and shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
  3. There shall have been installed on all floors up to and including the 9th Floor at the shaft entrances to the elevator, solid substantial wood frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
  4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor not later than 10 calendar days after the 12th Floor slab or that portion of it surrounding the elevator, has been poured and stripped, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the temporary machine room, to the low voltage transformers and car light outlets in the center of the shaftway and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the Equipment is declared ready for such connections by the Resident Engineer.
- F. **HIGH RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service to all floors, using a selected main passenger elevator, no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed, the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or temporary enclosure, meeting the requirements of the law.
  2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
  3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
  4. There shall have been furnished and installed, solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- G. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room slab or that portion of it surrounding the elevator shaft has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the high rise elevator to be used for



- temporary service and shall have connected such feeders to the terminals on the motor-generator starter panels or controllers in the machine room, to the signal circuits low voltage transformers for the annunciators and car light outlets in the center of shaft way. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- H. When the high rise elevator is completed and ready for temporary operation, the low rise temporary elevator shall be shut down.
- I. **REMOVAL:** When one (1) or more elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment, and promptly proceed with the installation of the permanent equipment as required under the Contract.
- J. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection determines it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables, new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- K. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installations that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheaves spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be removed from the rails. The full cost of parts replacement cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- L. **LIMITATIONS ON USE:** The temporary elevators shall not be used during their operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- M. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this Section beginning with the 31st working day after the 12th Floor slab, or that portion of the 12th Floor slab surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3**

**3.3 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR EXISTING BUILDINGS:**

- A. The Contractor may use, at the Commissioner's discretion, one (1) selected elevator in the building for temporary operation by the Contractor for the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction over the work at the Project. The operation of the temporary elevator and all equipment and/or parts utilized in





connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.

- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.
- C. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the elevator for temporary operation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- D. **LIMITATIONS ON USE:** The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- E. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide elevator services described in this section beginning with 15 consecutive calendar days from Notice to Proceed. This charge will be deducted from any amount due and owing to the Contractor.

#### **3.4 TEMPORARY HOISTS AND HOISTWAYS (FOR MATERIAL AND PERSONNEL):**

- A. **RESPONSIBILITY:** The Contractor shall provide adequate numbers of material hoists for the most expeditious performance of all parts of the work including the work of all its subcontractors.
- B. **LOCATIONS:** No hoists shall be constructed at such locations as will interfere with, or affect the construction of, floor arches, or the work of subcontractors. The hoists may be located at the exterior sides of the structure or in the courtyard and extend upward adjacent to the line of window openings. The hoists shall be located a sufficient distance from the exterior walls and be so protected as to prevent any of the permanent work from being damaged, stained or marred.
- C. **ELEVATOR SHAFT:** Wherever possible, one or more of the permanent elevator shafts may be used as temporary hoist ways, providing such use complies with the requirements of the Building Code of the City of New York and has been approved by the Commissioner, and providing further it entails no interference with the progress of the work.
- D. **PROTECTION FOR INTERIOR HOISTS:** All interior material hoist ways shall be enclosed on each floor and shall be adequately protected with appropriate safety guards. In no event shall the protection be less than that required by law.

**END OF SECTION 01 54 11**



**SECTION 01 54 23**  
**TEMPORARY SCAFFOLDING AND PLATFORMS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Section 01 35 26: Safety Requirements Procedures.
- C. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

**1.2 SUMMARY:**

- A. This Section includes administrative and general procedural requirements for Temporary Scaffolding and Platforms, including:
  - 1. Conformance
  - 2. Responsibility
  - 3. Jobsite Documentation and Submittals
  - 4. Inspections
- B. This Section governs ALL scaffold used on DDC project sites including, but not limited to, Suspended Scaffold, Supported Scaffold and Sidewalk Sheds.

**1.3 CONFORMANCE:**

- A. Unless otherwise indicated, the Contractor is responsible for providing, erecting, installing and maintaining all temporary scaffolding and platforms which shall comply with requirements of Chapter 33 (Safeguards During Construction or Demolition) of the NYC Building Code, NYC Local Law 52 of 2005, OSHA Construction Standard 1926 Subpart L, and furnishing the items and personnel set forth in this section.

**1.4 RESPONSIBILITY:**

- A. Jobsite Safety Coordinator: The Contractor shall designate and employ a Jobsite Safety Coordinator, who shall be a competent person, who shall have a daily presence on the project site during scaffold use. This designee must possess and maintain a valid New York City Department of Buildings supported scaffold certificate of completion. An alternate shall also be designated, in the event that the Jobsite Safety Coordinator is absent. The Jobsite Safety Coordinator shall:
  - 1. Verify completeness of documentation and submittals (as described below).
  - 2. Verify that inspections are performed, including pull tests (see below), reports are filed and reported deficiencies are corrected.
  - 3. Monitor trades using scaffold.
  - 4. Limit access to scaffold areas that are tagged for non-use.
  - 5. Inform trades of scaffold load limitations.
  - 6. Monitor loading of decks.
  - 7. Verify that any ties that are temporarily removed are properly restored in the same shift.
  - 8. Verify that outriggers and planks that are moved are properly set up and secured.
  - 9. Verify that all scaffold decks in use have proper access/egress.
  - 10. Verify that all open sides of decks in excess of 14 inches have proper guardrails and toe-boards.

11. Notify appropriate parties, including but not limited to the Resident Engineer, site safety coordinator / monitor, site safety consultant, scaffold users, contractor and the scaffold engineer, of misuses, non-conformances, hazards and accidents.
  12. Keep a log of significant actions and events connected with the scaffolding.
- B. The Contractor shall be responsible for erecting, maintaining and dismantling the scaffolding and/or sidewalk shed in conformance with requirements of the New York City Building Code, OSHA and the Contract documents, including the specifications. The Contractor shall also be guided by generally accepted standards of scaffold industry practice as promulgated by the Scaffold Industry Association.
- C. The Contractor shall require the subcontractor responsible for erecting the scaffolding to engage a Scaffold Engineer, licensed as a professional engineer by the State of New York. The Scaffold Engineer shall be responsible to ensure the following: (1) that the installation design is in compliance with requirements of the New York City Building Code and OSHA, (2) that the design comports with the capabilities of the components and the characteristics of the site, (3) that scaffold loads on the host building, including netting, have been properly considered, and (4) that the design documents provide accurate information for erectors and users.
- D. Scaffold users are trade contractors assigned to work on the scaffold. Training certificates from a New York City Department of Buildings approved training provider are mandatory. These users have the duty to become familiar with the New York City Building Code and OSHA requirements germane to users, to obey the instructions of the Jobsite Safety Coordinator and to inform the Jobsite Safety Coordinator of known hazards, non-conformances or violations.

#### 1.5 JOBSITE DOCUMENTATION AND SUBMITTALS:

The Contractor shall prepare, obtain and submit the following to the Resident Engineer:

- A. NYC Department of Buildings permit(s) for scaffold and sidewalk sheds (as applicable) including filing applications signed and sealed by a Professional Engineer licensed in the State of New York;
- B. Site logistics plan / site safety plan;
- C. Installation drawing(s), design and product data to be provided for **all** scaffold(s) and shed(s) must include, at a minimum:
  1. Plan(s);
  2. Elevation(s);
  3. Duty load designation; "standard" (150 psf live load) or "heavy duty" (300 psf live load).
  4. Details including base support, anchors and ties;
  5. Notes and specifications including load limits, number of planked levels, tie spacing, netting, and sequence of installation and removal.
  6. Anchorage into sound material.
  7. Load limits based on pull tests;
  8. Specifications for pull test(s), method, proof load and the number of trials;
  9. Elevations, levels or heights, where anchorage is made into masonry;
  10. Specifications for frames, planks, screw jacks, anchors, and any other ancillary hardware;
  11. Samples for anchors, ties and netting;
  12. Sequence of operations for erection and demolition;
  13. Location plan, heights, widths, "jumps" over doorways and driveways;
  14. Specify size, maximum span and maximum spacing of headers and stringers;
  15. Specify legs, girts, braces, nailing and connections;
  16. All sidewalk sheds shall be designed, engineered, signed and sealed by a Professional Engineer licensed in the State of New York;
    - a. Generic (not job specific) engineering drawings are satisfactory for standard sheds and arrangements.



- b. Special engineering is required for custom sheds, site-specific problems or non-standard arrangements.

#### 1.6 INSPECTIONS:

- A. Signed inspection reports shall be issued for each inspection and pull-test below, and shall be logged and maintained on site by the Jobsite Safety Coordinator for the duration of the project.
- B. Pull testing shall be required during design, and during or post erection, where anchorage is made into masonry. The Scaffold Engineer shall specify the test method, proof load and the number of trials.
- C. Sidewalk sheds shall be inspected after initial installation, major modification, or damage and thence every three months. Inspections shall be by a Scaffold Engineer for custom sheds and by a Competent Person employed by the Contractor for standard sheds.
- D. Scaffolds shall be inspected by the Scaffold Engineer during erection, post-erection and prior to use and thence every three months. The Scaffold Engineer shall repeat inspections after major alteration/modification, damage.
- E. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling, and the condition and integrity of the sidewalk sheds after high winds, major storms and at least once per month during usage.
- F. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling at least weekly, and the condition and integrity of the scaffold after high winds, major storms and at least once per month during usage.
- G. Scaffolds and Sidewalk Sheds shall be inspected daily by the Jobsite Safety Coordinator or alternate prior to use by scaffold users. The inspection results must be recorded in the maintenance log, and be available on-site at all times.
- H. At the completion of the project, submit all inspection documents as Miscellaneous Record Documents in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.

#### 1.7 LADDERS AND STAIRS:

- A. The Contractor shall provide and maintain ladders or temporary stairs extending from the street to the first story, and to and from every floor and roof level of the project.

#### 1.8 ACCESS AND EXITS:

- A. The ladders or temporary stairs shall be of acceptable size, number and location, so that proper and convenient access may be had by those required to proceed to and from all parts of the project.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 54 23**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 -- DDC STANDARD GENERAL CONDITION  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

TEMPORARY SCAFFOLDING AND PLATFORMS  
01 54 23 - 4

**SECTION 01 73 00**  
**EXECUTION**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes general procedural requirements governing execution of the Work including without limitation the following:
1. Delivery of Materials
  2. Contractor's Superintendent
  3. Surveys
  4. Borings
  5. Examination
  6. Environmental Assessment
  7. Preparation
  8. Deferred Construction
  9. Installation
  10. Permits
  11. Transportation
  12. Sleeves and Hangers
  13. Sleeve and Hanger Drawings
  14. Cutting and Patching
  15. Location of Partitions
  16. Furniture and Equipment
  17. Removal of Rubbish and Surplus Material
  18. Cleaning
  19. Security And Protection of Work Site
  20. Maintenance of Site and Adjoining Property
  21. Maintenance of Project Site
  22. Safety Precautions for Control Circuits
  23. Obstructions in Drainage Lines

**1.3 RELATED SECTIONS:** Include without limitation the following:

- |    |                  |  |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY                                  |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION      |
| C. | Section 01 33 00 | SUBMITTAL PROCEDURES                     |
| D. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT & DISPOSAL |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES                      |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS                |



#### 1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

#### 1.5 QUALITY ASSURANCE:

- A. Land Surveyor Qualifications: A professional land surveyor who is licensed in the State of New York and who is experienced in providing land-surveying services of the kind indicated.

#### PART II – PRODUCTS (Not Used)

#### PART III – EXECUTION

##### 3.1 DELIVERY OF MATERIALS:

- A. Material Orders: The Contractor shall furnish to the Commissioner a copy of each material order, indicating date of order and quantity of material, and shall also notify the Commissioner when materials have been delivered to the site and in what quantities.
- B. Ample Quantities: The Contractor shall deliver materials in ample quantities to insure the most prompt and uninterrupted progress of the work so as to complete the work within the Contract time.
- C. Containers: The manufacturer's containers shall be delivered with unbroken seals and shall bear proper labels.
- D. Deliveries: The Contractor shall coordinate deliveries in order to avoid delaying or impeding the progress of the work.
- E. Handling: The Contractor shall provide equipment and personnel to handle products by methods to prevent soiling or damage.
  - 1. Promptly inspect shipments to assure products comply with requirements, quantities are correct, and products are undamaged.
  - 2. Promptly return damaged shipments or incorrect orders to manufacturer.
  - 3. For materials or equipment to be reused or salvaged, use special care in removal, storage and reinstallation to insure proper function in completed work.
- F. Storage: Store products in accordance with provisions of Article 3.1, and periodically inspect to assure that stored products are undamaged and are maintained under required conditions.
- G. Stacking: All materials shall be properly stacked in convenient places adjacent to the site, or where directed, and protected in a satisfactory manner. Stacked materials shall be so arranged as to not interfere with visibility of traffic control devices.
- H. Overloading: If authority is given to store materials in any part of the project area, they shall be so stored as to cause no overloading.

- I. No Interference: If it becomes necessary to remove and restack materials to avoid impeding the progress of any part of the work or interfering with the work to be done by any trade subcontractor, the Contractor shall remove and restack such materials at no additional cost to the City.

### 3.2 CONTRACTOR'S CONSTRUCTION SUPERINTENDENT:

- A. Contractor's Construction Superintendent: The Contractor shall devote its time and personal attention to the work and shall employ and retain at the project site, from the commencement until the entire completion of the work, a Contractor's Construction Superintendent. The Contractor's Construction Superintendent shall be registered with the New York City Department of Buildings in compliance with the Construction Superintendent Rule of the City of New York and shall be competent and capable of maintaining proper supervision and care of the work and shall be acceptable to the Commissioner. The Construction Superintendent shall, in the absence of the Contractor, and irrespective of any superintendent or foreman employed by any subcontractor, shall see that the instructions of the Commissioner are carried out.
- B. Replacement: The Contractor's Construction Superintendent on the job shall not be changed or removed without the consent of the Commissioner.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3**

### 3.3 SURVEYS:

- A. Line and Grade: The City will establish a baseline and bench mark near the site of the work for use of the Contractor in connection with the performance of the work.
- B. Responsibility: The Contractor shall establish all other lines and elevations required for its work and shall be solely responsible for the accuracy thereof.
- C. Safeguard All Points: The Contractor shall safeguard all points, stakes, grade marks and bench marks made or established by the Contractor on the work, shall re-establish same if disturbed and bear the entire expense of rectifying the work improperly installed due to not maintaining, not protecting or removing without authorization such established points, stakes, or marks.
- D. City Monuments and Markers: No work shall be performed near City monuments or marks so as to disturb them until the said monuments or marks have been referenced or reset or otherwise disposed of by the relevant Agency or party who installed them.
- E. Foundations: The Contractor shall furnish certification from a licensed Surveyor that all portions of the foundation work are located in accordance with the Contract Drawings and at the elevations required thereby. This certification shall show the actual locations and the actual elevations of all the work in relation to the locations and elevations shown on the Contract Drawings, including but not restricted to the following:
  1. The locations and elevations of all piles, if any.
  2. Elevations of tops of all spread footings, tops of pile caps, and tops of all foundation walls, elevator pit walls and ramp walls.
  3. Location of all footing centers and pier centers including those for exterior wall columns.
  4. Location of all foundation walls including wall columns, elevator pit walls and ramp walls.
- F. Wall Lines: After the first courses of masonry or stone have been laid, the Contractor shall establish the permanent lines of exterior walls. The Contractor shall furnish promptly, certification from a licensed Surveyor, in the form of signed original drawings showing the exact location of such wall lines, of all portions of all structures. Except at its own risk, the Contractor shall not proceed further with the erection of walls until the Surveyor's certification has been submitted and verified for correct location of wall lines.





- G. **Surveyor:** The Surveyor selected for any of the purposes mentioned in Paragraph E and Paragraph F above, and Paragraph I below, shall be a land Surveyor licensed in the State of New York and shall be subject to the approval of the Commissioner. The Surveyor shall not be a regular employee of the Contractor, nor shall the Surveyor have any interest in the Contract. The Surveyor shall not be employed by the Contractor in laying out any work, it being intended that the Surveyor's certification shall represent an independent and disinterested verification of such layout. The Surveyor shall report to the Department of Design and Construction's Resident Engineer each time upon arrival to and departure from the site and review with the Resident Engineer the data required for the project.
- H. **Final Certification:** Final certification shall be submitted upon completion of the work or upon completion of any subdivision of the work as directed by the Commissioner. Any exceptions or deviations from the drawings shall be noted on the final certificate and there shall be included any maps, plates, notes, pertinent documents and data necessary, in the opinion of the Commissioner, to constitute a full and complete report.
- I. **Final Survey:** The Contractor shall submit to DDC for submission to the Department of Buildings a final Survey by the licensed Surveyor showing the location of the new Structure, before completion of the Structure. This Survey shall show the location of the first tier of beams or of the first floor; the finish grades of the open spaces on the plot; the established curb level and the location of all other Structures on the plan, together with the location and boundaries of the lot or plot upon which the Structure is constructed, curb cuts, all yard dimensions, etc.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4**

**3.4 BORINGS:**

- A. The work of this Sub-Section shall be the responsibility of the Contractor unless otherwise indicated.
- B. **Reference Drawings:** The Boring Drawings as listed on the title sheet are for information to the bidder and are to be used under the conditions as follows:
  - 1. **Boring Logs:** shown on the Boring Drawings, record information obtained under engineering supervision in the course of exploration carried out by or under the direction of forces of the Department of Design and Construction at the site.
  - 2. **Soils and Rock Samples:** All inferences are drawn from the indications observed as made by engineering and scientific personnel. All such inferences and all records of the work including soil samples and rock cores, if any, are available to bidders for inspection.
  - 3. **Certification of Samples:** The City certifies that the work was carried out as stated, and that the soil samples and rock cores, if any were referred to, were actually taken from the site at the times, places and in the manner indicated. The samples are available for inspection in the Department of Design and Construction Subsurface Exploration Section.
  - 4. **Bidder's Responsibility:** The bidder, however, is responsible for any conclusions to be drawn from the work. If the bidder accepts those of the City, it must do so at its own risk. If the bidder prefers not to assume such risk, the bidder is under the obligation of employing its own experts to analyze the available information, and must be responsible for any consequences of acting on their conclusions.
  - 5. **Continuity Not Guarantee:** The City does not guarantee continuity of conditions shown at actual boring locations over the entire site. Where possible, borings are located to avoid all obstructions and previous construction which can be found by inspection of the surface and the bidder is required to estimate the influence of such features from its own inspection of the site.

### 3.5 EXAMINATION:

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
  - 1. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground utilities and other construction indicated as existing are not guaranteed. Before beginning site work, investigate and verify the existence and location of underground utilities and other construction affecting the Work.
  - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; and underground electrical services.
  - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with the subcontractor responsible for installation or application present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
  - 1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
  - 2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
  - 3. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
  - 4. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

### 3.6 ENVIRONMENTAL ASSESSMENTS:

- A. City Responsibilities: An Environmental Assessment and survey is performed by the NYC DDC and its findings are included in the Contract Documents. In accordance with the NYC Administrative Code Title 15 Chapter 1 an asbestos survey is required to be performed by an Asbestos Investigator certified by the NYC Department of Environmental Protection (DEP) to identify the presence of asbestos containing material (ACM) prior to any alteration, renovation or demolition activity. The findings of such survey are required for the submission of approvals and permits issued by the NYC Department of Buildings (DOB). When the findings indicate that asbestos containing material is present and will be disturbed during the alteration, renovation or demolition activity then abatement design specifications will be incorporated into the contract documents. The Contractor shall comply with all federal, state and local asbestos regulations affecting the work for this Contract.
- B. Contractor Responsibility: The Contractor shall comply with all federal, state and local environmental regulations, including without limitation USEPA and OSHA regulations which require the Contractor to assess if lead based paint will be disturbed during the work in order to protect his/her workers and the building occupants from migration of lead dust into the air. The Contractor shall comply with all federal, state and local environmental waste disposal regulation which may be required during the work. The Contractor is required to hire licensed abatement and disposal companies for the requisite work.

### 3.7 PREPARATION:

- A. Field Measurements: The Contractor shall verify all dimensions and conditions on the job so that all work will properly join the existing work.
- B. The Contractor, before commencing work, shall examine all adjoining work on which its work is in any way dependent on good workmanship in accordance to the intent of the Specifications and the Contract



Drawings. The Contractor shall report to the Commissioner any condition that will prevent it from performing work that conforms to the required standard.

- C. Existing Utility Information: Furnish information to the Commissioner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- D. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

### 3.8 DEFERRED CONSTRUCTION:

- A. Where necessity for deferred construction is certified by the Commissioner, in order to permit the installation of any item or items of equipment required to be furnished and installed concurrent with the time allowed for doing and completing the work of the Contract, the Contractor shall defer construction work limited to adequate areas as approved by the Commissioner.
- B. The Contractor shall confer with the affected trade subcontractors and ascertain arrangements, time and facilities necessary to be made by the Contractor in order to execute the provisions specified herein.

### 3.9 INSTALLATION:

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
  - 1. Make vertical work plumb and make horizontal work level.
  - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
  - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work and work of trade subcontractors to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
  - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by the Design Consultant.
  - 2. Allow for building movement, including thermal expansion and contraction.
  - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.



- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

### 3.10 PERMITS:

- A. The Contractor shall comply with all local, state and federal laws, rules and regulations affecting the Work of this Project, including, without limitation, (1) obtaining all necessary permits for the performance of the Work prior to commencement thereof, and (2) complying with all requirements for the disposal of demolition and/or construction debris, waste, etc., including disposal in City landfills. The Contractor shall be responsible for all costs in connection with such regulatory compliance, unless otherwise specified in the Contract.

### 3.11 TRANSPORTATION:

- A. Availability: It shall be the duty of the Contractor to determine the availability of transportation facilities and dockage for the use of its employees, equipment and material and the conditions under which such use will be permitted.
- B. Costs: If transportation facilities and dockage are available and are permitted to be used by the governmental agency having jurisdiction, the Contractor shall pay all necessary costs and expenses, and abide by all rules and regulations promulgated in connection therewith.
- C. Vehicles: With respect to the use of vehicles on highways and bridges, the Contractor's attention is directed to the limitations set forth in the Rules of the City of New York, Title 34, Chapter 4, Section 4-15.
- D. Continued Use: It is understood that the Commissioner makes no warranty as to the continued use by the Contractor of such facilities.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.12**

### 3.12 SLEEVES AND HANGERS:

- A. Coordinate with Progress Schedule: The Contractor shall promptly furnish and install conduits, outlets, piping sleeves, boxes, inserts and all other materials and equipment that is to be built into the work in conformity with the requirements of the project.
- B. Cooperation of Subcontractors: All subcontractors shall fully cooperate with each other in connection with the performance of the above work as "cutting in" new work is neither contemplated nor will it be tolerated.
- C. Timeliness: In the event that timely delivery of sleeves and other materials cannot be made, and to avoid delay, the Contractor may arrange to have boxes or other forms set at the locations where the piping or other material is to pass through or into the slabs, walls or other work. Upon the subsequent installation of the sleeves or other material, the Contractor shall fill around them with materials as required by the Contract. The necessary expenditures incurred for the boxing out and filling in shall be borne by the Contractor.
- D. Inserts: The Contractor is to install strip inserts four (4) feet on center and perpendicular to beams in ceiling slabs of boiler, machine and mechanical equipment rooms. Inserts are to be installed for strippable concrete slabs only.



**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13**

**3.13 SLEEVE AND PENETRATION DRAWINGS:**

- A. As soon as practicable after the commencement of work and when the order in which concrete for the first slabs, walls, etc. to be poured is determined, the Contractor shall submit to the Resident Engineer a sketch indicating the location and size of all penetrations for sleeves, ducts, etc. which will be required to accommodate the mechanical trades, in order to determine if such penetrations will materially weaken the project's structure. The sketch shall be stamped and returned if approved and/or comments will be transmitted. The Contractor shall continue to submit sketches as the pouring schedule and the concrete work progresses and, until approvals for the penetration sketches have been given. The Contractor shall not predicate its layout work on unapproved sketches.

**3.14 CUTTING AND PATCHING:**

- A. Responsibility: The Contractor shall do all cutting, patching and restoration required by its work, unless otherwise particularly specified in the Specifications.
- B. Restore Work: The Contractor shall restore any work damaged during the performance of the work.
- C. Competent Workers: All restoration work shall be done to the satisfaction of the Commissioner by competent workers skilled in the trade required by such restoration. If, in the judgment of the Commissioner, workers engaged in restoration work are incompetent, they shall be replaced immediately by competent workers.
- D. Structural Elements: Do not cut and patch structural elements without the prior approval, in writing, of the Resident Engineer.
- E. Operational Elements: Do not cut and patch operating elements and related components.
- F. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in a manner that would, in Commissioner's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- G. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.
- H. Removals: The Contractor must remove from the premises all demolished materials of every nature or description resulting from cutting, patching and restoration work, in accordance with the requirements hereinafter stipulated under Sub-Section 3.17 herein and as further required in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.15**

**3.15 LOCATION OF PARTITIONS:**

- A. Within three (3) weeks after the concrete slabs have been poured on each floor level, the Contractor shall immediately locate accurately all of the partitions, including the door openings, on the floor slabs in a manner approved by the Resident Engineer.

### 3.16 FURNITURE AND EQUIPMENT:

- A. Responsibility: The Contractor is responsible for moving all loose furniture and/or equipment in all areas where the location of such furniture and/or equipment interferes with the proper performance of its work.
- B. Protection: All such furniture and/or equipment must be adequately protected with dust cloths and returned to their original locations when directed to do so by the Resident Engineer.

### 3.17 REMOVAL OF RUBBISH AND SURPLUS MATERIALS:

- A. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized. Comply with requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- B. Rubbish: Rubbish shall not be thrown from the windows or other parts of the project. Mason's rubbish, dirt and other dust-producing material shall be wetted down periodically.
- C. Location: The Contractor shall clean Project site and work area daily and sweep up and deposit, at a location designated on each floor, all of its rubbish, debris and waste materials, as it accumulates and when directed by the Resident Engineer. Wood crating shall be broken up, neatly bundled, tied and stacked ready for removal and be deposited at a location designated on each floor.
  - 1. Comply with requirements in NYC Fire Department for removal of combustible waste materials and debris.
  - 2. Do not hold materials more than 7 days during normal weather or 3 days if the temperature is expected to rise above 80 degrees F (27 degrees C).
  - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- D. Laborers: The Contractor shall be responsible for the removal of all rubbish, etc., from the site. The Contractor shall remove from the designated locations all piles of rubbish, debris, waste material and wood crating as they accumulate and when directed by the Resident Engineer, and shall remove them from the site. The Contractor shall employ and keep engaged for this purpose an adequate number of laborers.
- E. Surplus Materials: The Contractor shall remove from the site all surplus materials when there is no further use for same.
- F. Tools And Materials: At the conclusion of the work, all erection plant, tools, temporary structures and materials belonging to the Contractor shall be promptly removed.
- G. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.

### 3.18 CLEANING:

- A. The Contractor shall thoroughly clean all equipment and materials furnished and installed and shall deliver such materials and equipment undamaged in a clean and new appearing condition up to date of Final Acceptance.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- D. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.

- E. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration up to date of Final Acceptance.
- F. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration up to date of Final Acceptance.

**3.19 SECURITY AND PROTECTION OF WORK SITE:**

- A. Provide protection of installed work, including appropriate protective coverings and maintain conditions that ensure installed Work is without damage or deterioration up to date of Final Acceptance..
- B. Comply with manufacturer's written instructions for temperature and relative humidity.
- C. Secure and protect work and work site against damage, loss, injury, theft and/or vandalism.
- D. Maintain daily sign-in sheets of workers and visitors and make the sheets available to the Commissioner

**3.20 MAINTENANCE OF SITE AND ADJOINING PROPERTY:**

- A. The Contractor shall take over and maintain the Project site, after order to start work.
- B. The Contractor shall be responsible for the safety of the adjoining property, including sidewalks, paving, fences, sewers, water, gas, electric and other mains, pipes and conduits etc. until the date of Final Acceptance. The Contractor shall, at its own expense, except as otherwise specified, protect same and maintain them in at least as good a condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained and repaired to serviceable condition with materials to match existing.
- D. Provide and keep in good repair all bridging and decking necessary to maintain vehicular and pedestrian traffic.
- E. The Contractor shall also remove all snow and ice as it accumulates on the sidewalks within the Contract Limits Lines.

**3.21 MAINTENANCE OF PROJECT SITE:**

- A. The Contractor shall take over and maintain all project areas, after order to start work.
- B. Until the date of Final Acceptance, the Contractor shall be responsible for the safety of all project areas, including water, gas, electric and other mains and pipes and conduits and shall at the Contractor's own expense, except as otherwise specified, protect same and maintain them in at least as good condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained, and if damaged, repaired to serviceable conditions with materials to match existing.
- D. The Contractor shall keep the space for the Resident Engineer in a clean condition.

**3.22 SAFETY PRECAUTIONS FOR CONTROL CIRCUITS:**

- A. Control circuits, the failure of which will cause a hazard to life and property, shall comply with the New York City 2011 Electrical Code requirements.

**3.23 OBSTRUCTIONS IN DRAINAGE LINES:**

- A. The Contractor shall be responsible for all obstructions occurring in all drainage lines, fittings and fixtures after the installations and cleaning of these drainage lines, fittings and fixtures as certified by the Resident Engineer. Roof drains shall be kept clear of any and all debris. Any stoppage shall be repaired immediately at the expense of the Contractor.

**END OF SECTION 01 73 00**



**SECTION 01 74 19**  
**CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This section includes administrative and procedural requirements for the management and disposal of construction waste and includes the following requirements:
1. Waste Management Goals
  2. Waste Management Plan
  3. Progress Reports
  4. Progress Meetings
  5. Management Plan Implementation
- B. This Section includes:
1. Definitions
  2. Waste Management Performance Requirements
  3. Reference Resources
  4. Submittals
  5. Quality Assurance
  6. Waste Plan Implementation
  7. Additional Demolition and Salvage Requirements
  8. Disposal

**1.3 RELATED SECTIONS:** Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 73 00 EXECUTION
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONSTRUCTION RECORD DOCUMENTS
- G. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk or the like.



- D. Construction and Demolition Waste: Solid wastes typically including building materials, trash debris and rubble resulting from remodeling, repair and demolition operations. Hazardous materials and land clearing waste are not included.
- E. Diversion from Landfill: To remove, or have removed, from the site for recycling, reuse or salvage, material that might otherwise be sent to a landfill.
- F. Recyclable: The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product.
- G. Recycle (recycling): To sort, separate, process, treat or reconstitute solid waste and other discarded materials for the purpose of redirecting such materials into the manufacture of useful products. Recycling does not include burning, incinerating or thermally destroying waste.
- H. Return: To give back reusable items or unused products to vendors.
- I. Reuse: To reuse excess or discarded construction material in some manner on the Project site.
- J. Salvage: To remove a waste material from the Project site for resale or reuse.
- K. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable and reusable material.
- L. Waste Management Plan: A project-related plan for the collection, transportation and disposal of waste generated at the construction site. The purpose of the plan is to ultimately reduce the amount of material becoming landfill.

#### 1.5 WASTE MANAGEMENT PERFORMANCE REQUIREMENTS:

- A. The City of New York has established that this project shall generate the least amount of waste possible and that processes that ensure the generation of as little waste as possible due to error, inaccurate planning, breakage, mishandling, contamination, or other factors shall be employed.
- B. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized.

<b>REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.5 C</b>
---

- C. LEED CERTIFICATION: The City of New York will seek LEED (Leadership in Energy and Environmental Design) certification for this Project as indicated in the Addendum to the General Conditions from the U.S. Green Building Council. The documentation required here will be used for this purpose. LEED awards points for a variety of sustainable design measures on a project, one of which is the reuse and recycling of project waste.
- D. DIVERSION REQUIREMENTS. A minimum of 75% of total Project demolition waste (by weight) shall be diverted from landfill. The following waste categories are likely candidates to be included in the diversion plan as applicable for this project:
  1. Concrete
  2. Bricks
  3. Concrete masonry units (CMU)
  4. Asphalt
  5. Metals (e.g. banding, stud trim, ceiling grid, ductwork, piping, rebar, roofing, other trim, steel, iron, galvanized, stainless steel, aluminum, copper, zinc, brass, bronze)

6. Clean dimensional wood
7. Carpet and pad
8. Drywall
9. Ceiling tiles
10. Cardboard, paper, and packaging
11. Reuse items indicated on the Drawings and/or elsewhere in the Specification

- E. All fluorescent lamps, HID lamps and mercury-containing thermostats removed from the site shall be recycled.
- F. Recycling on the job, subject to the Commissioner's approval, is encouraged on the site itself, such as the crushing and reuse of removed sound concrete and stone. Include these categories in the Waste Management Plan.

#### 1.6 REFERENCES, RESOURCES:

- A. DDC encourages its contractors to seek information from websites and experts in salvage or recycling in order to minimize disposal costs. There are numerous opportunities to sell, salvage, or to donate materials and accrue tax benefits (which would accrue to the contractor); also there are outlets that will pick up, and in some cases buy recyclable materials. Examples of information resources are as follows:
1. DDC's Sustainable Design web site:  
[http://www.nyc.gov/html/ddc/html/design/sustainable\\_home.shtml](http://www.nyc.gov/html/ddc/html/design/sustainable_home.shtml) This includes a manual on Construction and Demolition Waste Reduction and Recycling, a Sample Waste Management Plan and sample C&D Waste Management log. A standard Construction and Demolition Waste Management Log form is included at the end of this section.
  2. Web Resources  
(Information only; no warranty or endorsement is implied.)  
[www.wastematch.org](http://www.wastematch.org) Site of New York Waste Match, a materials exchange database and service  
[www.biqnyc.org](http://www.biqnyc.org) Site of Build It Green NYC, a non-profit outlet for salvaged and surplus building materials  
[www.usgbc.org](http://www.usgbc.org) Site of the United States Green Building Council, with a description of the LEED certification process and requirements for C&D waste recycling  
[www.epa.gov/epawaste/index.htm](http://www.epa.gov/epawaste/index.htm) Site of the U.S. Environmental Protection Agency that discusses construction and demolition waste issues, and links to other resources.

#### 1.7 SUBMITTALS:

- A. The Contractor shall be responsible for the development and implementation of a Waste Management Plan for the Project. The Contractor's subcontractors shall assist in the development of that Plan, and collect and deposit their waste and recyclable materials in accordance with the approved Plan.
- B. DRAFT WASTE MANAGEMENT PLAN. Within fifteen (15) days after receipt of 'Notice to Proceed', or prior to any waste removal, whichever occurs sooner, the Contractor shall submit to the Commissioner a Draft Waste Management Plan. Include separate sections for demolition and construction waste. The Plan shall demonstrate how the performance goals will be met, and contain the following:



1. List of materials targeted for reuse, salvage, or recycling, and names, addresses, and phone numbers of receiving facilities/companies that will be purchasing or accepting each material.
  2. Description of onsite and/or offsite sorting methods for all materials to be removed from site.
  3. If mixed construction and demolition waste is to be sorted off-site, provide a letter from the processor stating the average percentage of mixed construction and demolition waste they recycle.
  4. Landfill information: Names of landfills where non-recyclable/reusable/salvageable waste will be disposed, and list of applicable tipping fees.
  5. Materials handling procedures: A description of the means by which any recyclable, salvaged, or reused materials will be protected from contamination, and collected in a manner that will meet the requirements for acceptance by the designated recycling processors.
  6. Transportation: A description of the means of transportation and destination for recycled materials.
  7. Meetings: Description of regular meetings to be held to address waste management.
  8. Sample spreadsheet and description of how the implementation of the plan will be documented on a monthly basis.
- C. **FINAL WASTE MANAGEMENT PLAN.** Within fifteen (15) days of Commissioner's approval of the Draft Plan, the Contractor shall submit a Final Waste Management Plan.
- D. **PROGRESS REPORTS.** The Contractor shall submit monthly a Waste Management Progress Report, containing the following information:
1. Project title, name of company completing report, and dates of period covered by the report
  2. Report on the disposal of all jobsite waste. A DDC C&D Waste Management Log form is available on the DDC Sustainable Design website and included at the end of this section. For each shipment of material removed from the site, provide the following:
    - a. Date and ticket number of removal
    - b. Identity of material hauler
    - c. Material Category
    - d. Total quantity of waste, in tones/cubic yards, by type
    - e. Quantity of waste salvaged, recycled and/or reused, by type
    - f. Total quantity of waste diverted from landfill (recycled, salvaged, reused) as a percentage of total waste
    - g. Recipient of each material type
  3. Provide monthly and cumulative project totals of waste, quantity diverted, and percentage diverted.
  4. Note that the unit of measure may be either tons or cubic yards, but must be consistent for all shipments and all materials throughout the project. Reports with inconsistent or mixed units will not be reviewed and will be returned for re-submission.
  5. Include legible copies of on-site logs, weight tickets and receipts. Receipts shall be from charitable organizations, recycling and/or disposal site operators who can legally accept the materials for the purpose of reuse, recycling or disposal. Contractor shall save such original documents for the life of the project plus seven (7) years.
- E. **LEED Submittal:** For LEED designated projects submit LEED Letter Template for the applicable credit, signed by the Contractor, tabulating total waste material, quantities diverted and means by which it is diverted, and statement that requirements for the credit have been met.
- F. **Refrigerant Recovery.** Submit Qualification data for Refrigerant recovery technician and statement of refrigerant recovery, signed by the refrigerant recovery technician responsible for recovering refrigerant

stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

### 1.8 QUALITY ASSURANCE:

- A. The Contractor shall designate a Waste Management Coordinator, to ensure compliance with this section. Coordinator shall be present at Project site full time for the duration of the project.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Waste management plans, documentation and implementation shall be discussed at the following meetings:
  - 1. Pre-demolition kick-off meeting
  - 2. Pre-construction kick-off meeting
  - 3. Regular job-site meetings
  - 4. Contractor toolbox meetings

## PART II – PRODUCTS (Not Used)

## PART III – EXECUTION

### 3.1 WASTE PLAN IMPLEMENTATION:

- A. The Contractor shall implement the Waste Management Plan, coordinate the Plan with all affected trades, and designate one individual as the Construction Waste Management Representative, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. The Contractor shall be responsible for the provision of containers and the removal of all waste, non-returned surplus materials, and rubbish from the site in accordance with the approved Waste Management Plan. The Contractor shall oversee and document the results of the Plan. Monies received for salvaged materials shall remain with the Contractor, except the monies for those items specifically identified elsewhere in the specifications, or indicated on the drawings as belonging to others.
- C. Responsibilities of Subcontractors: Each subcontractor shall be responsible for collecting its waste, non-returned surplus materials, and rubbish, in accordance with the Waste Management Plan.
- D. Distribution. The Contractor shall distribute copies of the Waste Management Plan to each Subcontractor, Resident Engineer, Construction Manager, and Commissioner.
- E. Training. The Contractor shall provide on-site instruction of proper waste management procedures to be used by all parties in appropriate stages of the Project.
- F. Procedures. Conduct waste management operations to ensure minimum interference with site vegetation, roads, streets, walks and other adjacent occupied and used facilities.
  - 1. Collect co-mingled waste and/or separate all recyclable waste in accordance with the Plan. Specific areas on the Project site are to be designated, and appropriate containers and bins clearly marked with acceptable and unacceptable materials.
  - 2. Inspect containers and bins for contamination and remove contaminated materials if found.



3. Comply with the General Conditions for controlling dust and dirt, environmental protection, and noise control.

### **3.2 ADDITIONAL DEMOLITION AND SALVAGE REQUIREMENTS:**

- A. Demolition and salvage of additional items indicated in other sections of the Project Specifications require special attention as part of the overall 75 % diversion from landfill. Specific requirements for special attention are designated in other sections of the Project Specifications.

### **3.3 DISPOSAL:**

- A. General. Except for items or material to be salvaged, recycled or otherwise reused, remove waste material from the Project site and legally dispose of them in a manner acceptable to authorities having jurisdiction.
  1. Except as otherwise specified, do not allow waste materials that are to be disposed of to accumulate on site.
  2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning. Do not burn waste materials
- C. Disposal. Transport waste materials off Project Site and legally dispose of them.

**END OF SECTION 01 74 19**





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

# CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT LOG

No Text



**SECTION 01 77 00  
CLOSEOUT PROCEDURES**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes administrative and general procedural requirements for Closeout Procedures, including without limitation the following:
1. Definitions
  2. Substantial Completion
  3. Final Acceptance
  4. Warranties
  5. Final Cleaning
  6. Repair of the Work
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED- NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

**1.3 RELATED SECTIONS:** include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT & DISPOSAL
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Substantial Completion: shall mean the written determination by the Commissioner that the Work required under the Contract is substantially, but not entirely, complete.
- D. Final Acceptance: shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

### 1.5 SUBSTANTIAL COMPLETION:

- A. Preliminary Procedures: Before requesting inspection to determine the date of Substantial Completion, the Contractor shall complete and supply all items required by the contract specifications, General Conditions, Addendum to the General Conditions, change orders or other directives from the Commissioner's representatives. The required items will include all contract requirements for substantial completion, including but not limited to items related to releases, regulatory approvals, warranties and guarantees, record documents, testing, demonstration and orientation, final clean up and repairs, and all specific checklist of items by the Resident Engineer. (See Attachment "A" at the end of this section for sample requirements for Substantial Completion).
- B. Prepare and submit a list to the Resident Engineer of incomplete items, the value of incomplete construction, and reasons the work is not complete.
- C. Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Substantial Completion. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer makes a determination that the work is substantially complete and approves the Final Punch List and the date for Final Acceptance, he/she will so advise the Commissioner and recommend issuance of the Certificate of Substantial Completion. If the Resident Engineer determines that the work is not substantially complete, he/she will notify the Contractor of those items that must be completed or corrected before the Certificate of Substantial Completion will be issued.
  - 1 Re-inspection: Contractor shall request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.
  - 2 Results of completed inspection will form the basis of requirements for Final Acceptance.

### 1.6 FINAL ACCEPTANCE:

- A. Preliminary Procedures: Before requesting final inspection for Final Acceptance of the Work, the Contractor shall complete the following. (Note that the following are to be completed, submitted as appropriate, and approved by the Commissioner, as applicable, prior to the final inspection and are not to be submitted for approval or otherwise at the final inspection unless specifically indicated). List exceptions in the request.
  - 1. Verify that all required submittals have been provided to the Commissioner including but not limited to the following:
    - a. Manufacturer's cleaning instructions
    - b. Posted instructions
    - c. As-built Record Documents (Drawings, specifications, and product data) as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, incorporating any changes required by the Commissioner as a result of the review of the submission prior to the pre-final inspection.
    - d. Operation and Maintenance Manuals, including Preventive Maintenance, Special Tools, Repair Requirements, Parts List, Spare Parts List, and Operating Instructions.

- e. Completion of required Demonstration and Orientation, as applicable, of designated personnel in operation and maintenance of systems, sub-systems and equipment.
  - f. Applicable LEED Building submittals as described in Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.
  - g. Construction progress photographs as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
2. Submit a certified copy of the final approved Punch List of items to be completed or corrected. The certified copy of the Punch List shall state that each item has been completed or otherwise resolved for acceptance, and shall be endorsed and dated by the Contractor.
  3. Submit pest-control final inspection report and survey as required in Section 01 50 00, TEMPORARY FACILITIES AND CONTROLS.
  4. Submit record documents and similar final record information.
  5. Deliver tools, spare parts, extra stock and similar items.
  6. Complete final clean-up requirements including touch-up painting of marred surfaces.
  7. Submit final meter readings for utilities, as applicable, a measured record of stored fuel, and similar data as of the date when the City took possession of and assumed responsibility for corresponding elements of the work.
- B. Final Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Final Acceptance of the Work. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify the Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer finds that all items on the Final Approved Punch List are complete and no further work remains to be done, he/she will so advise the Commissioner and recommend the issuance of the determination of Final Acceptance. If the Resident Engineer determines that the work is not complete, he/she will notify the Contractor of those items that must be completed or corrected before the determination of Final Acceptance will be issued.
- C. Final Acceptance: The Work will be accepted as final and complete as of the date of the Resident Engineer's inspection if, upon such inspection, the Resident Engineer finds that all items on the Punch List are complete and no further Work remains to be done. The Commissioner will then issue a written determination of Final Acceptance.

#### 1.7 WARRANTIES:

- A. The items of materials and/or equipment for which manufacturer warranties are required are listed in Schedule B of the Addendum. For each item of material and/or equipment listed in Schedule B, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth in Schedule B and will be replaced or repaired within such specified period. The contractor shall deliver all required warranties to the Commissioner.
- B. Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.
- C. Submittal Time: Submit written Warranties on request of the Commissioner for designated portions of the Work where commencement of Warranties other than date of Substantial Completion is indicated.
- D. Partial Occupancy: Submit properly executed Warranties to the Commissioner within 15 days of completion of designated portions of the Work that are completed and occupied or used by the City.
- E. Organize the Warranty documents into an orderly sequence based on the Project Specification Divisions and Section Numbers.



1. Bind Warranties in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
  2. Identify each binder on the front and spine with the typed or printed title "WARRANTIES;" name and location of Project; Capitol Budget Project Number (FMS ID); and Contractor's and applicable subcontractor's name and address.
  3. Provide heavy paper dividers with plastic-covered tabs for each separate Warranty. Mark tab to identify the product or installation.
  4. Provide a typed description of each product or installation being warranted, including the name of the product, and the name, address, and telephone number of the Installer.
- F. When warranted materials and/or equipment require operation and maintenance manuals, provide additional copies of each required Warranty in each required manual. Refer to Section 01 78 39, CONTRACT RECORD DOCUMENTS, for requirements of Operation and Maintenance Manuals.

## **PART II – PRODUCTS**

### **2.1 MATERIALS:**

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

## **PART III – EXECUTION**

### **3.1 FINAL CLEANING:**

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations, as applicable, before requesting inspection for Final Acceptance of the Work for entire Project or for a portion of Project:
    - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
    - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
    - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
    - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
    - e. Remove snow and ice to provide safe access to building.
    - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
    - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
    - h. Sweep concrete floors broom clean in unoccupied spaces.
    - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.



- j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
  - k. Remove labels that are not permanent.
  - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
    - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
  - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
  - n. Replace parts subject to unusual operating conditions.
  - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
  - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
  - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
  - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
  - s. Leave Project clean and ready for occupancy.
  - t. Construction Waste Disposal: Comply with waste disposal requirements in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests, as required in Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS. Prepare and submit a Pest Control report to the Commissioner.
- D. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on City's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

### 3.2 REPAIR OF THE WORK:

- A. Subject to the terms of the Contract the Contractor shall complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Contractor shall repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
  - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
  - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
    - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

**END OF SECTION 01 77 00**

**SECTION 01 77 00**

**ATTACHMENT 'A'**

**The following list is a general sample of Substantial Completion requirements, including but not limited to:**

1. Prepare and submit a list to the Resident Engineer, of incomplete items, the value of incomplete construction, and reasons the work is not complete.
2. Obtain and submit any necessary releases enabling the City unrestricted use of the project and access to services and utilities.
3. Regulatory Approvals: Submit all required documentation from applicable Governing Authorities, including, but not limited to, Department of Buildings (DoB); Department of Transportation (DoT); Department of Environmental Protection (DEP); Fire Department (FDNY); etc. Documentation to include, but not limited to, the following:
  - a. Building Permits, Applications and Sign-offs.
  - b. Permits and Sign-off for construction fences; sidewalk bridges; scaffolds, cranes and derricks; utilities; etc.
  - c. Certificates of Inspections and Sign-offs.
  - d. Required Certificates and Use Permits.
  - e. Certificate of Occupancy (C.O.), Temporary Certificate of Occupancy (T.C.O.) or Letter of Completion as applicable.
4. Submit specific warranties required by the specifications, final certifications, and similar documents.
5. Prepare and submit Record Documents as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, including but not limited to; approved documentation from Governing Authorities; as-built record drawings and specifications; product data; operation and maintenance manuals; Final Completion construction photographs; damage or settlement surveys; final property surveys; and similar final record information. The Resident Engineer will review the submission and provide appropriate comments. If comments are significant the initial submission will be returned to the Contractor for correction and re-submission incorporating the comments prior to the Final Inspection.
6. Record Waste Management Progress Report: Submit C&D Waste Management logs, with legible copies of weight tickets and receipts required in accordance with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
7. If applicable submit LEED Letter Template in accordance with the requirements of Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.
8. Schedule applicable Demonstration and Orientation required in other Sections of the Project Specifications and as described in Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.
9. Deliver tools, spare parts, extra materials, and similar items to location designated by Resident Engineer. Label with manufacturer's name and model number where applicable.
10. Make final changeover of permanent locks and deliver keys to the Resident Engineer. Advise Commissioner of changeover in security provisions.
11. Complete startup testing of systems as applicable.
12. Submit approved test/adjust/balance records.
13. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements as directed by the Resident Engineer.
14. If applicable complete Commissioning requirements as defined in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.
15. Complete final cleaning requirements, including touchup painting.
16. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text

**SECTION 01 78 39**  
**CONTRACT RECORD DOCUMENTS**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes administrative and general procedural requirements for Contract Record Documents, including:
1. As-built Contract Record Drawings.
  2. As-built marked-up copies of Record Specifications, addenda and Change Orders.
  3. As-built marked-up Product Data
  4. Record Samples
  5. Construction Record Photographs
  6. Operating and Maintenance Manuals
  7. Final Site Survey
  8. Guarantees and Warranties
  9. Waste Disposal Documentation
  10. LEED Materials and Matrix
  11. Miscellaneous Record Submittals
- B. The Department of Design and Construction, at the start of construction (kick-off meeting), will furnish to the Contractor at no cost a complete set of Contract Drawings Mylars (reproducible) pertaining to the work to be performed under the Contract. It is the responsibility of the Contractor to modify the Contract Drawings to indicate all changes and corrections, if any, occurring in the work as actually installed. The Contractor is required to furnish all other Mylar (reproducible) drawings, if necessary, such as Addenda Drawings and Supplementary Drawings as may be necessary to indicate all work in detail as actually completed. All professional seals must be blocked out. Title box complete with project title and Design Consultants' names will remain.
- C. Maintenance of Documents and Samples: The Contractor shall maintain, during the progress of the work, an accurate record of the work as actually installed, on Contract Record Drawings, on Mylar (reproducible), in ink. Store record documents and samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition. Make documents and samples available at all times for the Resident Engineer's inspections.

The Contractor's attention is particularly directed to the necessity of keeping accurate records of all subsurface and concealed work, so that the Contract Record Drawings contain this information in exact detail and location. Contract Record Drawings shall also show all connections, valves, gates, switches, cut-outs and similar operating equipment.

For projects designated to achieve a LEED rating the Contractor shall receive a copy of the project's LEED scorecard for the purpose of monitoring compliance with the target objectives and to facilitate coordination with the LEED Consultant. The Contractor shall receive periodic updates of this scorecard,





and is required to submit the final version of the Scorecard at Substantial Completion with other project Record Documents.

**1.3 RELATED SECTIONS: include without limitation the following:**

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- C. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

**1.5 SUBMITTALS:**

- A. As-Built Contract Record Drawings: Comply with the following:
  1. Progress Submission: As directed by the Resident Engineer, submit progress As-Built Contract Record Drawings at the 50% Construction Completion stage.
  2. Final Submission: Before substantial completion payment, the Contractor shall furnish to the Commissioner one (1) complete set of marked-up Mylar (reproducible) As-Built Contract Record Drawings, in ink indicating all of the work and locations as actually installed, plus one (1) set of paper prints which will be furnished to the sponsoring agency by DDC.
  3. As-Built Contract Record Drawings shall be of the same size as that of the Contract Drawings, with a one (1) inch margin on three (3) sides and a two (2) inch margin on the left side for binding.
  4. Each As-Built Contract Record Drawing shall bear the legend "AS-BUILT CONTRACT RECORD DRAWING" in heavy block lettering, one half (1/2) inch high, and contain the following data:

**AS-BUILT CONTRACT RECORD DRAWING**

Contractor's Name \_\_\_\_\_  
 Contractor's Address \_\_\_\_\_  
 Subcontractor's Name (where applicable) \_\_\_\_\_  
 Subcontractor's Address \_\_\_\_\_  
 Made by: \_\_\_\_\_ Date \_\_\_\_\_  
 Checked by: \_\_\_\_\_ Date \_\_\_\_\_

Commissioner's Representatives  
 (Resident Engineer) DDC  
 (Plumbing Inspector) DDC  
 (Heating & Ventilating Inspector) DDC  
 (Electrical Inspector) DDC



5. Record Drawing Title Sheet: The Contractor shall prepare a title sheet, the same size as the Contract Record Drawings, which shall contain the following:
  - a. Heading:  
The City of New York  
Department of Design and Construction  
Division of Public Buildings
  - b. Capital Budget Project Number (FMS ID)
  - c. Name and Location of Project
  - d. Contractor's Name and Address
  - e. Subcontractor's Name and Address (where applicable)
  - f. Record of changes (a caption description of work affected, and the date and number of Change Order or other authorization)
  - g. List of Record Drawings
- B. Record Specifications, Addenda and Change Order: Submit to the Commissioner two (2) copies each of marked-up Record Specifications, Addenda and Change Orders.
- C. Record Product Data: Submit to the Commissioner two (2) sets of Record Product Data.
- D. Record Construction Photographs: Submit to the Commissioner final as-built construction photographs and negatives of the completed work as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
- E. Operating and Maintenance Manuals:
  1. Submit three (3) copies each of preliminary manuals to the Resident Engineer for review and approval. The Contractor shall make such corrections, changes and/or additions to the manual until deemed satisfactory by the Resident Engineer. Deliver three (3) copies of the final approved manuals to the Resident Engineer for distribution.
  2. Commissioning: Comply with the requirements of Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS, as well as the requirements set forth in sections of the Project Specifications, for projects designated for Commissioning. Submit four (4) copies each of data designated to be included in the Commissioning Operation and Maintenance Manual to the Resident Engineer. The Resident Engineer will forward such data to the Commissioning Authority/Agent (CxA) for review and comment. The Contractor shall make such corrections, changes and/or additions to the data until deemed satisfactory and deliver four (4) copies of the final data to the Resident Engineer for use by the Commissioning Authority/Agent (CxA) to prepare the Commissioning Operation and Maintenance Manual.
    - a. Non-Commissioning Data: All remaining data not designated for Commissioning and required as part of Maintenance and Operation Manual shall be prepared and assembled in accordance with the requirements of this section for Operating and Maintenance Manuals.
- F. Final Site Survey: Submit Final Site Survey as described in Section 01 73 00, EXECUTION, in quantities requested by the Commissioner, signed and sealed by a Land Surveyor licensed in the State of New York.
- G. Guarantees and Warranties.
- H. Waste Disposal Documents and Miscellaneous Record Documents.



## PART II – PRODUCTS

### 2.1 CONTRACT RECORD DRAWINGS:

- A. Record Prints: The Contractor shall maintain one set of blue- or black-line white prints as applicable of the Contract Drawings and Shop Drawings. If applicable, the Record Contract Drawings and Shop Drawings shall incorporate the arrangement of the work based on the accepted Master Coordination Drawing(s) as described in Section 01 33 00, SUBMITTAL PROCEDURES.
1. Preparation: The Contractor shall mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
    - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
    - b. Accurately record information in an understandable drawing technique.
    - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
  2. Change Orders: All changes from Contract Drawings shall be distinctly encircled and identified by Change Order number correlating to changes listed on the "Title Sheet." The Contractor shall show within the encircled areas the work as actually installed.
- B. Content: Types of items requiring marking include, but are not limited to, the following:
- 1 Dimensional changes to Drawings.
  - 2 Revisions to details shown on Drawings.
  - 3 Depths of foundations below first floor.
  - 4 Locations and depths of underground utilities.
  - 5 Revisions to routing of piping and conduits.
  - 6 Revisions to electrical circuitry.
  - 7 Actual equipment locations.
  - 8 Duct size and routing.
  - 9 Locations of concealed internal utilities.
  - 10 Changes made by Change Order
  - 11 Changes made following Commissioner's written orders.
  - 12 Details not on the original Contract Drawings.
  - 13 Field records for variable and concealed conditions.
  - 14 Record information on the Work that is shown only schematically.
- C. Progress Record Mylar's (reproducible): As directed by the Resident Engineer at 50% construction completion, review marked-up Record Prints with the Resident Engineer and the Design Consultant. When directed by the Resident Engineer transfer progress mark-ups to a full set of Mylar's (reproducible) and submit one blue line or black line record copy to the Resident Engineer. The marked-up Mylar's (reproducible) shall be retained by the contractor for completion of mark-up and final submission.
- D. Final Contract Record Mylar's (reproducible): Immediately before final inspection for Certificate of Substantial Completion, review marked-up Record Prints with the Resident Engineer and the Design Consultant. When authorized, complete mark-up of a full set of corrected Mylar's (reproducible) of the Contract Drawings.
1. Incorporate changes and additional information previously marked on Record Prints. Erase, redraw, and add details and notations where applicable.
  2. Refer instances of uncertainty to Resident Engineer for resolution.
  3. Print the As-Built Contract Drawings and Shop Drawings for use as Record Transparencies as described in Sub-Section 1.5.

## 2.2 RECORD SPECIFICATIONS, ADDENDA AND CHANGE ORDERS:

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
  3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made
  4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
  5. Note related Change Orders and Record Drawings where applicable.
  6. Upon completion of mark-up, submit two (2) complete copies of the marked-up Record Specifications to the Commissioner.

## 2.3 RECORD PRODUCT DATA:

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
  2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
  3. If possible, a Change Order proposal should include resubmitting updated Product Data. This eliminates the need to mark up the previous submittal.
  4. Note related Change Orders and Record Drawings where applicable.
  5. Upon completion of mark-up submit to the Commissioner two (2) sets of the marked-up Record Product Data.
  6. Where Record Product Data is required as part of Maintenance Manuals, submit marked-up Product Data as an insert in the manual instead of submittal as record Product Data.

## 2.4 RECORD SAMPLE SUBMITTAL:

- A. Prior to the date of Substantial Completion, the Contractor shall meet with the Resident Engineer at the site to determine which of the Samples maintained during the construction period shall be transmitted to the Commissioner for record purposes.
- B. Comply with the Resident Engineer's instructions for packaging, identification marking and delivery to DDC. Dispose of other samples as specified for disposal of surplus and waste material.

## 2.5 OPERATING AND MAINTENANCE MANUALS:

- A. The Contractor shall provide preliminary and final versions of Operating and Maintenance Manuals required for those systems, equipment and materials listed in other Sections of the Project Specifications.
- B. Format: Prepare and assemble Operation and Maintenance Manuals in heavy-duty, 3-ring, hardback loose leaf binders in the form of an instructional manual. All binders for each discipline shall be the same color. When multiple binders are used, correlate data into related consistent groupings. Binder front shall contain permanently attached labels displaying the following:

1. Heading:  
The City of New York  
Department of Design and Construction  
Division of Public Buildings
  2. Capital Budget Project Number (FMS ID)
  3. Name and Location of Project
  4. Contractor's Name and Address
  5. Subcontractor's Name and Address (where applicable)
  6. Dates of the work covered by the contents of the Project Manual.
  7. Binder spine shall display Project Number (FMS ID) and date of completion.
- C. Organization: Include a section in the directory for each of the following:
1. List of documents
  2. List of systems
  3. List of equipment
  4. Table of contents
- D. Arrange content by systems under Specification Section numbers and sequence of Table of Contents of the Project manual. Provide tabbed flyleaf for each separate product, equipment and/or system/subsystem with typed description of product and major component parts of equipment.
- E. Safety warnings or cautions shall be visibly highlighted within each maintenance procedure. Use of such highlights shall be limited to only critical items and shall not be used in an excessive manner which would reduce their effectiveness.
- F. For each product or system, list names, addresses and telephone numbers of Subcontractors and Suppliers, including local source of supplies and replacement parts. Vendors and Supplier listings are to include names, addresses and telephone numbers, including nearest field service telephone numbers.
- G. Where contents of the manual include any manufacturer's catalog pages, clearly indicate the precise items and options included in the installation and delete all manufacturers' data regarding products not included in the installation.
- H. All material within manuals shall be new. Copies used for prior submittals or used in construction shall not be used.
- I. Submit preliminary and final manual editions to the Commissioner according to the approved progress schedule.
- J. Manuals shall present all technical material to the greatest extent possible, with respect to text, tabular matter and illustrations. Illustrations shall preferably consist of line drawings. All applicable drawings shall be included. If available, color photograph prints may be included.
- K. Preliminary manual editions shall be as technically complete as the final manual edition. All illustrations shall be in final forms.
- L. Final manual editions shall be technically accurate and complete and shall represent all "as-built" systems, pieces of equipment, or materials, which have been accepted by the Commissioner. All illustrations, text and tabular material shall be in final form. All shop drawings shall be included as specified in individual Specification Sections.
- M. Building products, applied materials, and finishes: Include product data, with catalog number, size, composition, and color texture designations. Where applicable, provide information for re-ordering custom manufactured products.
- N. Instructions for care and maintenance: Include manufacturers' recommendations for cleaning agents and methods, and recommended schedule for cleaning and maintenance.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

- O. Moisture Protection and Weather Exposed Products: Include product data listing applicable reference standards, chemical compositions, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- P. Additional Requirements: Specified in individual Specification Sections.

**2.6 DEMONSTRATION AND ORIENTATION DVD:**

- A. Non-Commissioned Projects: The Contractor shall submit final version of applicable Demonstration and Orientation DVD recordings in compliance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

**2.7 GUARANTEES AND WARRANTIES:**

- A. SCHEDULE B – Requirements for guarantees and warranties for the Project are set forth in Schedule B, which is included as part of the Addendum.
- B. FORM – For all guarantee requirements set forth in Schedule B, the Contractor shall provide a written guaranty, in the form set forth herein.
- C. Submit fully executed and signed manufacturers' Warranties as listed in the Project Specifications and outlined in Schedule B of the Addendum. Refer to Section 01 77 00, CLOSEOUT PROCEDURES for submittal requirements.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

**GUARANTY**

DDC PROJECT # \_\_\_\_\_

PROJECT DESCRIPTION \_\_\_\_\_

CONTRACT # \_\_\_\_\_

SPECIFICATION SECTION # AND TITLE \_\_\_\_\_

GUARANTY TO BE IN EFFECT FROM \_\_\_\_\_

TO \_\_\_\_\_

The Contractor hereby guarantees that the work specified under the above section of the aforesaid Contract will be free from defects of material and/or workmanship, for the period indicated above.

The Contractor also guarantees that it will promptly repair, restore, rebuild or replace whichever may be deemed necessary by the City, any or all defective material or workmanship of the aforementioned section, that may appear within the guaranty period and any finished work to which damage may occur because of such defects, to the satisfaction of the City and without any cost or expense to the City.

The Contractor hereby agrees to pay to the City the cost of the repairs or replacements should the City make the same because of the failure of the Contractor to do so.

Contractor: \_\_\_\_\_

By: \_\_\_\_\_  
Signature of Partner or Corporate Officer

Print Name: \_\_\_\_\_

Subscribed and sworn to before me this  
day of \_\_\_\_\_, year \_\_\_\_\_

\_\_\_\_\_  
Notary Public



## 2.8 WASTE DISPOSAL DOCUMENTATION:

- A. Certify and deliver to the Commissioner all documentation including reports, receipts, certificates, records etc. for the collection, handling, storage, classification, testing, transportation, recycling and/or disposal of all Non-Hazardous Construction Waste as required by Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL, and Hazardous Waste as required by other Project Specification Sections. Certify compliance with all applicable governing laws, codes, rules and regulations.

## 2.9 MISCELLANEOUS RECORD DOCUMENTS:

- A. Refer to other Project Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities. Prior to Final Acceptance, complete miscellaneous records and place in good order, properly identified and bound or otherwise organized to allow for use and reference.
- B. Submit three (3) copies of each document to the Commissioner or as otherwise directed by the Commissioner.

## PART III – EXECUTION

### 3.1 RECORDING AND MAINTENANCE:

- A. Recording: Maintain one copy of each submittal during the construction period for Contract Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Contract Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to the Contract Record Documents for the Resident Engineer's reference during normal working hours.

END OF SECTION 01 79 39





NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS  
SINGLE CONTRACT PROJECTS  
Issue Date - June 01, 2013

No Text



**SECTION 01 79 00**  
**DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 79 00**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes administrative and procedural requirements, when set forth in sections of the Project Specifications, for instructing facility's personnel, including the following:
1. Demonstration of operation of systems, subsystems, and equipment.
  2. Owner's Pre-Acceptance Orientation in operation and maintenance of systems, subsystems, and equipment.
  3. Demonstration and Orientation videotapes. (Non-Commissioned Projects)
- B. The Contractor shall provide the services of equipment manufacturers orientation specialists experienced in the type of equipment to be demonstrated.
- C. Separate Orientation sessions shall be conducted for mechanical operations and maintenance personnel and for electronic and electrical maintenance personnel.
- D. Commissioning: Refer to the Addendum to identify whether this project is to be Commissioned. For Commissioned projects the Contractor shall provide Demonstration and Orientation as described in this section and cooperate with the Commissioning Authority/Agent (CxA) to implement Commissioning requirements as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.

**1.3 RELATED SECTIONS: Include without limitation the following:**

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 77 00 CLOSEOUT PROCEDURES
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS
- F. Specific requirements for demonstration and orientation indicated in other sections of the Project Specifications

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

## 1.5 SUBMITTALS:

- A. Instruction Program: Submit three (3) copies of outline of instructional program for demonstration and orientation, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each orientation module to the Commissioner for approval no less than thirty (30) days prior to the date the proposed orientation is to take place. Include learning objectives and outline for each orientation module.
1. At completion of orientation, submit three (3) complete orientation manual(s) and three (3) applicable DVD recording(s) to the Commissioner for the facility's and City's use.
- B. Qualification Data: For facilitator, instructor and Videographer.
- C. Attendance Record: For each orientation module, submit list of participants and length of instruction time.
- D. Evaluations: For each participant and for each orientation module, submit results and documentation of performance-based test.
- E. Submit all final orientation material to the Resident Engineer a minimum of fourteen (14) days prior to the scheduled orientation.
- F. Demonstration and Orientation Recordings:
1. Non-Commissioned Projects:
    - a. The Contractor shall submit to the Commissioner three (3) copies of Demonstration and Orientation DVD (Digital Video Disk) recordings within seven (7) days of end of each orientation module.
    - b. Identification: On each copy, provide an applied label with the following information:
      - 1) Project Contract I.D. Number
      - 2) Project Contract Name
      - 3) Name of Contractor
      - 4) Name of Subcontractor as applicable
      - 5) Name of Design Consultant
      - 6) Name of Construction Manager as applicable
      - 7) Date recorded.
      - 8) Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
      - 9) Table of Contents including list of systems covered.
    - c. Transcript: Prepared on 8-1/2-by-11-inch paper, hole-punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding DVD recording. Include name of Project and date of recording on each page.
  2. Commissioned Projects:
    - a. Demonstration and Orientation DVD recordings for Commissioned projects will be recorded by the Commissioning Authority/Agent (CxA) under separate contract with the City of New



York. The Contractor performing Demonstration and Orientation shall cooperate with the CxA in the recording of each Demonstration and Orientation module.

#### 1.6 QUALITY ASSURANCE:

- A. Facilitator Qualifications: A firm or individual experienced in orientation or educating maintenance personnel in an orientation program similar in content and extent to that indicated for this Project.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 01 40 00, QUALITY REQUIREMENTS, experienced in operation and maintenance procedures and orientation.
- C. Videographer Qualifications: A professional Videographer who has experience with orientation and construction projects.
- D. Pre-instruction Conference: Schedule with the Resident Engineer a conference at Project site to comply with requirements in Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION. Review methods and procedures related to demonstration and orientation including, but not limited to, the following:
  - 1. Inspect and discuss locations and other facilities required for instruction.
  - 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
  - 3. Review required content of instruction.
  - 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

#### 1.7 COORDINATION:

- A. Coordinate instruction schedule with the Resident Engineer and facility's operations. Adjust schedule as required to minimize disrupting facility's operations.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
- C. Coordinate content of orientation modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the Commissioner.

### PART II – PRODUCTS

#### 2.1 INSTRUCTION PROGRAM:

- A. Program Structure: Develop an instruction program that includes individual orientation modules for each system and equipment not part of a system, as specified and required by individual Specification Sections.
- B. Orientation Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following:
  - 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
    - a. System, subsystem, and equipment descriptions.
    - b. Performance and design criteria if Contractor is delegated design responsibility.
    - c. Operating standards.



- d. Regulatory requirements.
  - e. Equipment function including auxiliary equipment and systems.
  - f. Operating characteristics.
  - g. Limiting conditions.
  - h. Performance curves.
2. Documentation: Review the following items in detail:
    - a. Emergency manuals.
    - b. Operations manuals.
    - c. Maintenance manuals.
    - d. Project Record Documents.
    - e. Identification systems.
    - f. Warranties
  3. Emergencies: Include the following, as applicable:
    - a. Instructions on meaning of warnings, trouble indications, and error messages.
    - b. Instructions on stopping.
    - c. Shutdown instructions for each type of emergency.
    - d. Operating instructions for conditions outside of normal operating limits.
    - e. Sequences for electric or electronic systems.
    - f. Special operating instructions and procedures.
  4. Operations: Include the following, as applicable:
    - a. Startup procedures.
    - b. Equipment or system break-in procedures.
    - c. Routine and normal operating instructions.
    - d. Regulation and control procedures.
    - e. Control sequences.
    - f. Safety procedures.
    - g. Instructions on stopping.
    - h. Normal shutdown instructions.
    - i. Operating procedures for emergencies.
    - j. Operating procedures for system, subsystem, or equipment failure.
    - k. Seasonal and weekend operating instructions.
    - l. Required sequences for electric or electronic systems.
    - m. Special operating instructions and procedures.
  5. Adjustments: Include the following:
    - a. Alignments.
    - b. Checking adjustments.
    - c. Noise and vibration adjustments.
    - d. Economy and efficiency adjustments.
  6. Troubleshooting: Include the following:
    - a. Diagnostic instructions.
    - b. Test and inspection procedures.
  7. Maintenance: Include the following:
    - a. Inspection procedures.
    - b. Types of cleaning agents to be used and methods of cleaning.
    - c. List of cleaning agents and methods of cleaning detrimental to product.
    - d. Procedures for routine cleaning



- e. Procedures for preventive maintenance.
  - f. Procedures for routine maintenance.
  - g. Instruction on use of special tools.
  - h. Housekeeping practices
8. Repairs: Include the following:
- a. Diagnosis instructions.
  - b. Repair instructions.
  - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
  - d. Instructions for identifying parts and components.
  - e. Review of spare parts needed for operation and maintenance.

### **PART III – EXECUTION**

#### **3.1 INSTRUCTION:**

- A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and the Resident Engineer for the number of participants, instruction times, and location.
- B. The Contractor shall engage qualified instructors to instruct facility's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
- C. Scheduling: Schedule instruction with the Resident Engineer at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
  - 1. Schedule orientation with the Resident Engineer with at least fourteen (14) days' advance notice.
- D. Evaluation: At conclusion of each orientation module, assess and document each participant's mastery of module(s) by use of an oral a written or a demonstration performance-based test.
- E. Cleanup: Collect and remove used and leftover educational materials from project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial orientation use.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2.A or  
SUB-SECTION 3.2.B**

#### **3.2 DEMONSTRATION AND ORIENTATION RECORDINGS:**

- A. Non-Commissioned projects:
  - 1. The Contractor shall engage a qualified commercial Videographer to record demonstration and orientation sessions. Record each orientation module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.
  - 2. At beginning of each orientation module, record each chart containing learning objective and lesson outline.
  - 3. All recordings must be close captioned.
  - 4. Recording Format: Provide high-quality DVD (Digital Video Disk) format.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

5. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and orientation. Display continuous running time.
6. Narration: Describe scenes on the recording by audio narration by microphone while recording or by dubbing audio narration off-site after. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
7. Transcript: Provide a typewritten transcript of the narration. Display images and running time captured from opposite the corresponding narration segment.

B. Commissioned Projects:

1. The Commissioning Authority/Agent (CxA) under separate contract with the City of New York will be responsible for DVD recording of Demonstration and Orientation sessions as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.

END OF SECTION 01 79 00



**SECTION 01 81 13  
SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

**A. LEED BUILDING - GENERAL REQUIREMENTS:**

The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED™ Green Building rating. Specific project requirements related to this goal are listed in the applicable paragraphs of this section of the General Conditions. The Contractor shall ensure that these requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated LEED BUILDING criteria.

**B. This Section includes:**

1. Definitions
2. LEED Provisions
3. LEED Building Submittals
4. LEED Building Submittal Requirements
5. LEED Action Plan

**1.3 RELATED SECTIONS:** Include without limitation the following:

- |    |                     |  |
|----|---------------------|--|
| A. | Section 01 74 19    | CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL   |
| B. | Section 01 81 13.13 | VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES,<br>SEALANTS, PAINTS AND COATINGS |
| C. | Section 01 81 19    | INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS                                     |
| D. | Section 01 91 13    | GENERAL COMMISSIONING REQUIREMENTS   |

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Agrifiber Products: Products derived from recovered agricultural waste fiber from sources such as cereal straw, sugarcane bagasse, sunflower husk, walnut shells, coconut husks, and agricultural prunings, processed and mixed with resins to produce panels with characteristics similar to composite wood.





- C. **Composite Wood:** Products composed of wood or plant particles or fibers bonded by a synthetic resin or binder to produce panels such as plywood, particleboard, and medium density fiberboard (MDF). Does not include hardboard, structural panels, glued laminated timber, prefabricated wood I-joists, or finger-jointed lumber.
- D. **Design Consultant:** "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- E. **Forest Stewardship Council (FSC) Certified Wood:** Wood-based materials and products certified in accordance with the Forest Stewardship Council's principles and criteria.
- F. **LEED:** The Leadership in Energy & Environmental Design rating system developed by the United States Green Building Council.
- G. **Rapidly Renewable Materials:** Materials made from agricultural products that are typically harvested within a ten-year or shorter cycle. Rapidly renewable materials include products made from bamboo, cotton, flax, jute, straw, sunflower seed hulls, vegetable oils, or wool.
- H. **Regionally Manufactured Materials:** Materials that are manufactured within a radius of 500 miles from the Project location. Manufacturing refers to the final assembly of components into the building product that is installed at the Project site.
- I. **Regionally Extracted, Harvested, or Recovered Materials:** Materials which are extracted, harvested, or recovered and manufactured within a radius of 500 miles from the Project site.
- J. **Recycled Content:** The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer), or after consumer use (post-consumer).
  - 1. Spills and scraps from the original manufacturing process that are combined with other constituents after a minimal amount of reprocessing for use in further production of the same product are not recycled materials.
  - 2. Discarded materials from one manufacturing process that are used as constituents in another manufacturing process except mechanical and electrical components are pre-consumer recycled materials.
  - 3. "Pre-consumer" may also be referred to as "post-industrial".
- K. **Solar Reflectance Index (SRI):** A measure of a material's ability to reflect solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is equal to 0, and a standard white (reflectance 0.80, emittance of 0.90) is equal to 100.
- L. **Volatile Organic Compound (VOC):** Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.



## 1.5 LEED PROVISIONS:

- A. Refer to the Addendum for the LEED rating to be achieved for this project. The provisions to achieve this LEED rating are integrated within the project construction documents and specifications. The Contractor is specifically directed to the "LEED BUILDING Performance Criteria" and "LEED BUILDING Submittals" sections within the contract specification. Additional LEED requirements are met through aspects of the project design, including material and equipment selections, which may not be specifically identified as LEED BUILDING requirements. Compliance with the requirements needed to obtain LEED prerequisites and credits will be used as one criterion to evaluate substitution requests.

## 1.6 LEED BUILDING SUBMITTALS:

- A. Scope: LEED BUILDING submittals are required for all installed materials included in General Construction work. LEED BUILDING Submittals are only required for field-applied adhesives, sealants, paints and coatings included in Plumbing, Mechanical and Electrical work. Submit all required LEED BUILDING submittals in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Applicability: The extent of the LEED BUILDING Submittals varies depending on the specification section. Applicable LEED BUILDING Submittals are listed under the "LEED BUILDING Submittals" heading in each specification section. The detailed requirements for the LEED BUILDING Submittals are defined in Item C below.
- C. Detailed Requirements: Sub-Sections 1.6 C.1 through 1.6 C.3 below defines the information and documents to be provided for each type of LEED BUILDING Submittal as identified in the LEED Submittal Requirements of each specification section:
1. ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM (EBMCF){GHI}: Information to be supplied for this form (blank sample copy attached at end of this Section to be modified as appropriate to the project) shall include some or all of the following items, as identified in the LEED Submittal Requirements of each specification section:
    - a. Cost breakdowns for the materials included in the contractor or sub-contractor's scope of work. Cost reporting shall include itemized material costs (excluding the contractor's labor, equipment, overhead and profit).
    - b. The percentages (by weight) of post-consumer and/or post-industrial recycled content in the supplied product(s).
      1. For each product with recycled content, also indicate the total recycled content value ( $1/2 \times \text{pre-consumer percentage} \times \text{product value} + 1 \times \text{post-consumer percentage} \times \text{product value} = \text{total recycled content value}$ ).
      2. See additional requirements for concrete below.
    - c. Identification (Yes/No) of materials manufactured within 500 miles of the project site AND containing raw materials harvested or extracted within 500 miles of the project site.
      - 1) Indicate the percentage by weight, relative to the total weight of the product that meets these criteria.
      - 2) Indicate the point of harvest/extraction/recovery of regional raw materials, the point of final assembly of regional manufactured products, and the distance from each point to the project site.
    - d. Volatile Organic Compound (VOC) content of all field-applied adhesives, sealants, paints, and coatings, listed in grams/liter or lbs./gallon, less water.
      - 1) For detailed requirements refer to Section 01 81 13.13 VOC LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
    - e. The amount of "Forest Stewardship Council (FSC) Certified" wood products if used in the Project.
      - 1) Record only new FSC-certified wood products. Do not record reclaimed, salvaged, or recycled FSC-certified wood products.



- 2) Reclaimed, salvaged, or recycled FSC-certified wood may be recorded as post-consumer recycled content.
  - f. The amount of Rapidly Renewable materials if used in the Project.
    - 1) Indicate the type of rapidly renewable material used, and the percentage by weight, relative to the total weight of the product, that consists of rapidly renewable material.
  - g. The percentage (by weight), relative to the total weight of cementitious materials, of supplementary cementitious materials or pozzolans such as fly ash used in each concrete mix used in the Project.
    - 1) For each concrete mix, provide a complete breakdown of all components, by weight and by cost.
  - h. Identification (Yes/No) of composite wood or agrifiber products used in the project that are free of added urea-added formaldehyde resins.
  - i. Identification (Yes/No) of flooring products used in the project that have Carpet and Rug Institute (CRI) Green Label or Green Label Plus certification, or Resilient Floor Covering Institute FloorScore certification.
    - 1) Untreated solid wood flooring, and mineral-based flooring products such as tile, masonry, terrazzo, and cut stone that have no organic-based coatings or sealants, are excluded from this requirement.
  - j. The EBMCF shall record the above information only for those materials or products permanently installed in the project. The EBMCF shall record VOC content, composite and agrifiber products, and CRI or FloorScore ratings only for those materials or products permanently installed within the weather barrier of the LEED building.
2. **EBMCF BACK-UP DOCUMENTATION:** These documents are used to validate the information provided on the EBMCF (except cost data). For each material listed on the EBMCF, provide documentation to certify the material's LEED BUILDING attributes, as applicable:
- a. **RECYCLED CONTENT:** Provide published product literature or letter of certification on the manufacturer's letterhead certifying the amounts of post-consumer and/or post-industrial content.
  - b. **REGIONAL MANUFACTURING AND REGIONAL RAW MATERIALS (WITHIN 500 MILES):** Provide published product literature or letter of certification on the manufacturer's letterhead indicating the city/state where the manufacturing plant is located, where each of the raw materials in the product were extracted, harvested or recovered and the distance in miles from the project site.
    - 1) If only some of the raw materials for a particular product or assembly originate within 500 miles of the project site, provide the percentage (by weight) that these materials comprise in the complete product.
  - c. **VOC CONTENT:** Provide Material Safety Data Sheets (MSDS) certifying the Volatile Organic Compound (VOC) content of the adhesive, sealant, paint, or coating products. VOC content is to be reported in grams/liter or lbs./gallon, less water. If the MSDS does not show the product's VOC content, this information must be provided through other published product literature from the manufacturer, or stated in a letter of certification from the product manufacturer on the manufacturer's letterhead.
  - d. **RAPIDLY RENEWABLE MATERIALS:** If used in the project, provide published literature or letter of certification on the manufacturer's letterhead certifying the percentage of each product that is rapidly renewable (by weight).
3. **PRODUCT CUT SHEETS:** Provide product cut sheets with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project.
4. **CRI GREEN LABEL PLUS CERTIFICATION:** For carpets and carpet cushions, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the "Green Label Plus" IAQ testing program of the Carpet and Rug Institute of Dalton, GA.



5. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER RESINS:** For all composite wood, engineered wood and agrifiber products (including plywood, particleboard, and medium density fiberboard), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products do not contain added urea-formaldehyde resins.
6. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER LAMINATING ADHESIVES:** For all laminating adhesives used with composite wood, engineered wood and agrifiber products (e.g., adhesives used to laminate wood veneers to an engineered wood substrate), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the adhesive products do not contain urea-formaldehyde.
7. **FSC-CERTIFIED WOOD:**
  - a. If used in the project, provide chain of custody documents and copies of invoices regarding wood products, including whether or not such wood product is FSC-certified.
  - b. If used in the project, for assemblies, provide the percentage (by cost and by weight) of the assembly that is FSC-certified wood.
  - c. If used in the project, for assemblies, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the percentage that is FSC-certified wood.
8. **GREEN SEAL COMPLIANCE:** Provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the following product types comply with the VOC limits and chemical component restrictions developed by the Green Seal organization of Washington, DC:
  - a. Interior Architectural Paints and Coatings: refer to Green Seal standard GS-11 (1<sup>st</sup> edition, May 1993)
  - b. Anti-corrosive and Anti-rust paints: refer to Green Seal standard GC-03 (2<sup>nd</sup> Edition, January 1997)
  - c. Aerosol Adhesives: refer to Green Seal standard GS-36 (1<sup>st</sup> edition, October 2000)
9. **HIGH ALBEDO PAVING AND WALKWAY MATERIALS:** For paving and walkway materials made from concrete or brick provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying a minimum Solar Reflectance Index (SRI) value of 29. SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.
10. **HIGH ALBEDO ROOFING MATERIALS:** For exposed roofing membranes, pavers, and ballast products, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following minimum Solar Reflectance Index (SRI) values:
  - a. 78 for low-sloped roofing applications (slope  $\leq$  2:12)
  - b. 29 for steep-sloped roofing applications (slope  $>$  2:12)

SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.

Vegetated roof surfaces are exempt from the SRI criteria.
11. **LOW MERCURY LAMPS:** For all fluorescent, compact fluorescent, and HID lamps installed in the project, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying:
  - a. The mercury content or content range per lamp in milligrams or picograms;
  - b. The design light output per lamp (light at 40% of a lamp's useful life) in lumens; and
  - c. The rated average life of the lamp in hours.



In addition, provide the total number of each lamp type installed in the project.

12. **FLOORSCORE CERTIFICATION:** For all hard surface flooring, including vinyl, linoleum, laminate flooring, wood flooring, ceramic flooring, rubber flooring, and wall base, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the current FloorScore standard requirements.
13. **CONCRETE:** Provide concrete mix design for each mix, designated by a distinct identifying code or number and signed by a Professional Engineer licensed in the state in which the concrete manufacturer or supplier is located.
14. **INTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed within the building's weather barrier, provide manufacturer's cut sheets indicating the following:
  - a. Fixture power in watts.
  - b. Initial lamp lumens.
  - c. Photometric distribution data.
  - d. Dimming capability, in range of percentages.
15. **EXTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed on site, provide manufacturer's cut sheets indicating the following:
  - a. Fixture power in watts.
  - b. Initial lamp lumens.
  - c. Photometric distribution data.
  - d. Range of field adjustability, if any.
  - e. Warranty of suitability for exterior use.
16. **ALTERNATIVE TRANSPORTATION:** Provide manufacturer's cut sheets and/or shop drawings for the following items installed on site:
  - a. Bike racks, including total number of bicycle slots provided.
  - b. Signage indicating parking spaces reserved for electric or low-emitting vehicles and for carpools/vanpools, including total number of signs.
17. **WATER CONSERVING FIXTURES:** For all water consuming plumbing fixtures and fittings, provide manufacturer's cut sheets showing maximum flow rates and/or flush rates.
18. **ENERGY SAVING APPLIANCES:** Provide manufacturer's cut sheets and published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the product's rating under the U.S. EPA/DOE Energy Star program, for all of the following:
  - a. Appliances (i.e., refrigerators, dishwashers, microwave ovens, televisions, clothes washers, clothes dryers, chilled water dispensers).
  - b. Office equipment (i.e., copy machines, fax machines, plotters/printers, scanners, binding and publishing equipment).
  - c. Electronics (i.e., servers, desktop computers, computer monitor displays, laptop computers, network equipment).
  - d. Commercial food service equipment
19. **GLAZING:** For glazing in any windows, doors, storefront and window wall systems, curtainwall systems, skylights, and partitions, provide manufacturer's cut sheets indicating the following:
  - a. Glazed area.
  - b. Visible light transmittance.
  - c. Solar heat gain coefficient.
  - d. Fenestration assembly u-factor.
20. **VENTILATION:** Provide manufacturer's cut sheets for the following:
  - a. Carbon dioxide monitoring systems, if any, installed to measure outside air delivery.
  - b. Air filters: for detailed requirements refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS.
21. **REFRIGERATION:** For all refrigeration equipment, provide manufacturer's cut sheets indicating the following:
  - a. Equipment type.



- b. Equipment life. Default values specified by the 2007 ASHRAE Applications Handbook will be used unless otherwise demonstrated by the manufacturer's guarantee and an equivalent long-term service contract.
- c. Refrigerant type.
- d. Refrigerant charge in pounds of refrigerant per ton of gross cooling capacity.
- e. Tested refrigerant leakage rate, in percent per year. A default rate of 2% will be used unless otherwise demonstrated by test data.
- f. Tested end-of-life refrigerant loss, in percent. A default rate of 10% will be used unless otherwise demonstrated by test data.

#### 1.7 LEED BUILDING SUBMITTAL REQUIREMENTS:

- A. The LEED BUILDING submittal information shall be assembled into one package per specification section(s) (or per subcontractor), and submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Incomplete or inaccurate LEED BUILDING submittals may be used as the basis for rejecting the submittals of products or assemblies.

#### 1.8 LEED ACTION PLANS:

- A. Construction Waste Management Plan- Refer to Section 01 74 19, Construction Waste Management and Disposal for detailed submittal requirements.
- B. Construction IAQ Management Plan- Refer to Section 01 81 19, Indoor Air Quality Requirements for LEED Buildings, for detailed submittal requirements.
- C. Erosion and Sedimentation Control Plan:
  1. The Plan shall be in accordance with the New York State Department of Environmental Conservation (NYSDEC) or the 2003 EPA Construction General Permit, whichever is more stringent.
  2. The Plan shall be submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
  3. Detailed requirements: ESC Plan
    - a. Include the Stormwater Pollution Prevention Plan, if required.
    - b. Identify the party responsible for Plan monitoring and documentation. The party must be regularly on site.
    - c. Describe all site work that will be implemented on the project.
    - d. Provide site plan with location of ESC measures, including, but not limited to, stormwater quantity controls, stormwater quality controls, stabilized construction entrances, washdown areas, and inlet/catch basin protection.
    - e. Describe the inspection and maintenance of the ESC measures. Provide a construction schedule indicating weekly site review.
    - f. Describe reporting and documentation measures.
  4. Detailed requirements: ESC Measures
  5. Submittal requirements: ESC Tracking Log
    - a. Note date of major rain events, describe damage, describe any repairs or maintenance performed, and note responsible party.
    - b. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party.
    - c. Submit monthly.
  6. Implementation
    - a. The Contractor shall implement the ESC Plan, coordinate the Plan with all affected trades, and designate one individual as the Erosion and Sedimentation Control Representative, who



- will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- b. The Contractor shall be responsible for the provision, maintenance, and repair of all ESC measures.
  - c. Demonstration. The Contractor shall provide on-site instruction of proper construction practices required to prevent erosion and sedimentation.
  - d. Meetings. Urgent or ongoing ESC issues shall be discussed at weekly on-site job meetings.

#### 1.9 QUALITY ASSURANCE:

- A. The Contractor shall implement all LEED Action Plans, coordinate the Plans and LEED Building Submittals with all affected trades, and designate one individual as the Sustainable Construction Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of LEED activities with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. Responsibilities of Contractor's Subcontractors: The Contractor shall be responsible for his/her subcontractors complying with the LEED Action Plans and for providing required LEED documentation as required for the project.
- C. Distribution and Compilation: The Contractor shall be responsible for distributing the EBMCF and any other forms or templates required for the subcontractors to record LEED documentation. The Contractor shall also be responsible for collecting and compiling EBMCF information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. Meetings: Sustainable design and construction issues shall be discussed at the following meetings:
  - 1. Demolition kick-off meeting
  - 2. Construction kick-off meeting
  - 3. Construction kick-off meeting for LEED (independent meeting)
  - 4. Weekly job-site progress and coordination meetings
  - 5. Closeout meeting

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 81 13**



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

# ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM

Date: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Project I.D.: \_\_\_\_\_  
 Project Location: \_\_\_\_\_

Contractor Name: \_\_\_\_\_  
 Contractor Contact: \_\_\_\_\_  
 Telephone Number: \_\_\_\_\_

Product/Manufacturer	Recycled Content		Regional <sup>4</sup>		Rapidly Renewable <sup>7</sup>		VOC content <sup>8</sup> *VOC content listed	Flooring <sup>9</sup> *Green Label or FloorScore <sup>10</sup>	Wood *Added urea formaldehyde (Yes/No) <sup>10</sup>	FSC Certified <sup>11</sup> (% by wt)
	Material Cost <sup>1</sup> (% by wt) <sup>2</sup>	Post-Consumer (% by wt) <sup>3</sup>	Total % (1/2 Pre + Post)	Location & Distance to Extraction <sup>5</sup>	Location & Distance to Manufacture <sup>6</sup>	Extracted & Manuf. (% by wt)				

<sup>1</sup> **Material Cost:** As it appears on the manufacturer's or distributor's invoice to the contractor or subcontractor. Does not include labor or equipment costs associated with installation.  
<sup>2</sup> **Pre-Consumer Recycled Content:** Industrial/manufacturing waste material (e.g., fly-ash and synthetic gypsum, both waste products from coal burning electricity plants) diverted from landfill and incorporated into a finished product. Scrap raw materials that can be reused in the same manufacturing process from which they are recovered are not considered Pre-Consumer Recycled Content.  
<sup>3</sup> **Post-Consumer Recycled Content:** Material or product that has served its intended consumer use (e.g., an empty plastic bottle) and has been diverted from landfill and incorporated into a finished product.  
<sup>4</sup> **Regional:** Refers to a material/product that is BOTH extracted AND manufactured within 500 miles of the Project site. Record this information ONLY for materials/products meeting BOTH of these criteria.  
<sup>5</sup> **Extraction:** Refers to the location from which the raw resources used in a building product are extracted, harvested, or recovered.  
<sup>6</sup> **Manufacture:** Refers to the location of the final assembly of components into a building product that is furnished and installed by the Contractor.  
<sup>7</sup> **Rapidly Renewable:** Refers to materials/products derived from agricultural products that are typically harvested within a ten-year or shorter cycle.  
<sup>8</sup> **VOC Content:** The quantity of volatile organic compounds contained in adhesives, sealants, paints and architectural coatings. Reported in grams/liter or lbs/gallon, less water.  
<sup>9</sup> **Flooring:** For carpet, indicate Carpet and Rug Institute (CRI) Green Label Plus certification. For carpet cushion, indicate CRI Green Label certification. For all flooring except unfinished/unreated wood and mineral-based flooring (tile, masonry, terrazzo, cut stone) without organic-based coatings or sealants, indicate Resilient Floor Covering Institute FloorScore rating. VOC limits for adhesives, sealants, etc. still apply.  
<sup>10</sup> **Added Urea Formaldehyde:** Applies to composite wood and agrifiber products only (plywood, particleboard, MDF, OSB, wheatboard, strawboard). Resins or binders with added urea formaldehyde are prohibited.  
<sup>11</sup> **FSC Certified:** Certification from the Forest Stewardship Council. This column is only applicable to wood products.  
<sup>\*</sup> Applies only to materials/products installed within the weather barrier.

Contractor Certification: \_\_\_\_\_ (the Contractor) hereby certify that the material information contained herein is an accurate representation of the material qualifications to be provided by the Contractor as components of the final building construction. Furthermore, I understand that any change in such qualifications during the purchasing period will require prior written approval from the Commissioner.  
 Signature of Authorized Representative: \_\_\_\_\_ Date: \_\_\_\_\_



No Text

**SECTION 01 81 13.13**

**VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.13**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 SUMMARY:**

- A. This Section includes requirements for volatile organic compound (VOC) content in adhesives, sealants, paints and coatings used for the project.
- B. All sections in the Project Specifications with adhesives, sealant or sealant primer applications, paints and coatings shall follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications regarding adhesives, sealant or sealant applications, paints and coatings, the requirements set forth in this Section shall prevail.
- C. This Section includes:
1. General Requirements
  2. References
  3. VOC Requirements for Interior Adhesives
  4. VOC Requirements for Interior Sealants
  5. VOC requirements for Interior Paints
  6. VOC requirements for Interior Coatings
  7. Submittals

**1.3 RELATED SECTIONS:** Include without limitation the following:

- |    |                  |  |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY  |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION                |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION                |
| D. | Section 01 33 00 | SUBMITTAL PROCEDURES                               |
| E. | Section 01 73 00 | EXECUTION  |
| F. | Section 01 77 00 | CLOSEOUT PROCEDURES                                |
| G. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS                          |
| H. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |
| I. | Section 01 81 19 | INDOOR AIR QUALITY FOR LEED BUILDINGS              |

**1.4 DEFINITIONS:**

- A. **ADHESIVE:** Any substance used to bond one surface to another by attachment. Includes adhesive primers and adhesive bonding primers.
1. **Aerosol Adhesive:** Any adhesive packaged as an aerosol with a spray mechanism permanently housed in a non-refillable can designed for hand-held application without the need for ancillary equipment.
- B. **CARCINOGEN:** A chemical listed as a known, probable, reasonably anticipated, or possible human

carcinogen by the International Agency for Research on Cancer (IARC) (Groups 1, 2A, and 2B), the National Toxicology Program (NTP) (Groups 1 and 2), the U.S. Environmental Protection Agency (EPA) Integrated Risk Information System (IRIS) (weight-of-evidence classifications A, B1, B2, and C, carcinogenic, likely to be carcinogenic, and suggestive evidence of carcinogenicity or carcinogen potential), or the Occupational Safety and Health Administration (OSHA).

- C. **CLEAR WOOD FINISH:** Clear/semi-transparent coating applied to wood substrates to provide a transparent or translucent solid film.
  - 1. **Lacquer:** Clear/semi-transparent coating formulated with cellulosic or synthetic resins to dry by evaporation without chemical reaction and provide a solid, protective film.
  - 2. **Sanding Sealer:** A sanding sealer that also meets the definition of a lacquer.
  - 3. **Varnish:** Clear/semi-transparent coating, excluding lacquers and shellacs, formulated to dry by chemical reaction on exposure to air. May contain small amounts of pigment.
- D. **COATING:** Liquid, liquefiable, or mastic composition that is converted to a solid adherent film after application to a substrate as a thin layer; and is used for decorating, protecting, identifying or to serve some functional purpose such as the filling or concealing of surface irregularities or the modification of light and heat radiation characteristics; and is intended for on-site application to interior or exterior surfaces of buildings. Does not include stains, clear finishes, recycled latex paint, specialty (industrial, marine or automotive) coatings or paint sold in aerosol cans.
- E. **FLOOR COATING:** Opaque coating applied to flooring. Excludes industrial maintenance coatings.
- F. **HAZARDOUS AIR POLLUTANT:** Any compound listed by the U.S. EPA in the Clean Air Act Section 112(b)(1) as a hazardous air pollutant.
- G. **MUTAGEN:** A chemical that meets the criteria for category 1, chemicals known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans, under the Harmonized System for the Classification of Chemicals Which Cause Mutations in Germ Cells (United Nations Economic Commission for Europe, Globally Harmonized System of Classification and Labeling of Chemicals).
- H. **OZONE-DEPLETING COMPOUNDS:** A compound with an ozone-depletion potential greater than 0.1 (CFC 11=1) according to the U.S. EPA list of Class I and Class II Ozone-Depleting Substances.
- I. **PAINT:** A pigmented coating. For the purposes of this specification, paint primers are considered to be paints.
  - 1. **Flat Coating or Paint:** Has a gloss of less than 15 (using an 85-degree meter) or less than 5 (using a 60-degree meter).
  - 2. **Non-Flat Coating or Paint:** Has a gloss of greater than or equal to 15 (using an 85-degree meter) or greater than or equal to 5 (using a 60-degree meter).
  - 3. **Non-Flat High-Gloss Coating or Paint:** Has a gloss of greater than or equal to 70 (using a 60-degree meter).
  - 4. **Anti-Corrosive / Rust Preventative Paint:** Coating formulated and recommended for use in preventing the corrosion of ferrous metal substrates.
- J. **PRIMER:** Coating that is formulated and recommended for one or more of the following purposes: to provide a firm bond between the substrate and a subsequent coating; to prevent a subsequent coating from being absorbed into the substrate; to prevent harm to a subsequent coating from materials in the substrate; or to provide a smooth surface for application of a subsequent coating.
- K. **REPRODUCTIVE TOXIN:** A chemical listed as a reproductive toxin (including developmental, female, and male toxins) by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (California Code of Regulations, Title 22, Division 2, Subdivision 1, Chapter 3, Sections 1200, et. Seq.).
- L. **SANDING SEALER:** Clear/semi-transparent coating formulated to seal bare wood. Can be abraded to create a smooth surface for subsequent coatings. Does not include sanding sealers that are lacquers (see Clear Wood Finish above).
- M. **SEALANT:** Any material with adhesive properties, formulated primarily to fill, seal, or waterproof gaps or joints.

between surfaces. Includes sealant primers and caulks.

- N. SHELLAC: Clear or pigmented coating formulated solely with the resinous secretions of the lac beetle, thinned with alcohol and formulated to dry by evaporation without chemical reaction. Excludes floor applications.
- O. STAIN: Clear semi-transparent/opaque coating formulated to change the color but not conceal the grain pattern or texture of the substrate.
- P. VOLATILE AROMATIC COMPOUND: Any hydrocarbon compound containing one or more 6-carbone benzene rings, and having an initial boiling point less than or equal to 280 degrees Celsius measured at standard conditions of temperature and pressure.
- Q. VOLATILE ORGANIC COMPOUND: Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.
- R. WATERPROOFING SEALER: A coating that prevents the penetration of water into porous substrates.

#### 1.5 GENERAL REQUIREMENTS:

- A. The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED Green building rating. Specific project requirements related to this goal which may impact this area of work are listed in the applicable paragraphs of this specification section. The Contractor shall ensure that the requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated environmental goals.

#### 1.6 REFERENCES:

- A. Rule 1168 – “Adhesive and Sealant Applications”, amended 7 January 2005): South Coast Air Quality Management District (SCAQMD), State of California, [www.aqmd.gov](http://www.aqmd.gov)
- B. Rule 1113 - “Architectural Coatings”, amended 9 July 2004: South Coast Air Quality Management District (SCAQMD), State of California, [www.aqmd.gov](http://www.aqmd.gov)
- C. Green Seal Standard GS-11- “Paints”, of Green Seal, Inc., Washington, DC, [www.greenseal.org](http://www.greenseal.org)
- D. Green Seal Standard GC-03- “Anti-Corrosive Paints”, of Green Seal, Inc., Washington, DC, [www.greenseal.org](http://www.greenseal.org)

#### 1.7 VOC REQUIREMENTS FOR INTERIOR ADHESIVES, SEALANTS, PAINTS AND COATINGS:

- A. GENERAL: Unless otherwise specified herein, the VOC content of all interior adhesives, sealants, paints and coatings (herein referred to as “products”) shall not be in excess of **250 grams per liter**.
- B. No product shall contain any ingredients that are carcinogens, mutagens, reproductive toxins, persistent bioaccumulative compounds, hazardous air pollutants, or ozone-depleting compounds. An exception shall be made for titanium dioxide and, for products that are pre-tinted by the manufacturer, carbon black, which shall be less than or equal to 1% by weight of the product.
- C. No product shall contain the following:
  - 1. methylene chloride
  - 2. 1,1,1-trichloroethane
  - 3. benzene



4. toluene
5. ethylbenzene
6. vinyl chloride
7. naphthalene
8. 1,2-dichlorobenzene
9. di (2-ethylhexyl) phthalate
10. butyl benzyl phthalate
11. di-n-butyl phthalate
12. di-n-octyl phthalate
13. diethyl phthalate
14. dimethyl phthalate
15. isophorone
16. antimony
17. cadmium
18. hexavalent chromium
19. lead
20. mercury
21. formaldehyde
22. methyl ethyl ketone
23. methyl isobutyl ketone
24. acrolein
25. acrylonitrile

D. No product shall contain more than 1.0% by weight of sum total of volatile aromatic compounds.

#### 1.8 VOC REQUIREMENTS FOR INTERIOR ADHESIVES:

- A. The volatile organic compound (VOC) content of adhesives, adhesive bonding primers, or adhesive primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
- C. For specified building construction related applications, the allowable VOC content is as follows:

##### 1. Architectural Applications:

a.	Indoor carpet adhesive	50
b.	Carpet pad adhesive	50
c.	Wood flooring adhesive	100
d.	Rubber floor adhesive	60
e.	Subfloor adhesive	50
f.	Ceramic tile adhesive	65
g.	VCT and asphalt tile adhesive	50
h.	Drywall and panel adhesive	50
i.	Cove base adhesive	50
j.	Multipurpose construction adhesive	70
k.	Structural glazing adhesive	100

##### 2. Specialty Applications:

a.	PVC welding	510
b.	CPVC welding	490
c.	ABS welding	325
d.	Plastic cement welding	250



- e. Adhesive primer for plastic 550
  - f. Contact Adhesive 80
  - g. Special Purpose Contact Adhesive 250
  - h. Structural Wood Member Adhesive 140
  - i. Sheet Applied Rubber Lining Operations 850
  - j. Top and Trim Adhesive 250
3. Substrate Specific Applications:
- a. Metal to metal 30
  - b. Plastic foams 50
  - c. Porous material (except wood) 50
  - d. Wood 30
  - e. Fiberglass 80
4. Aerosol Adhesives:
- a. General purpose mist spray 65% VOC's by weight
  - b. General purpose web spray 55% VOC's by weight
  - c. Special purpose aerosol adhesives (all types) 70% VOC's by weight

**1.9 VOC REQUIREMENTS FOR INTERIOR SEALANTS:**

- A. The volatile organic compound (VOC) content of sealants, or sealant primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
1. Sealants:
- a. Architectural 250
  - b. Non-membrane roof 300
  - c. Roadway 250
  - d. Single-ply roof membrane 450
  - e. Other 420
2. Sealant Primer:
- a. Architectural – Nonporous 250
  - b. Architectural – Porous 775
  - c. Other 750

**1.10 VOC REQUIREMENTS FOR INTERIOR PAINTS:**

- A. Paints and Primers: Paints and primers used in non-specialized interior applications (i.e., for wallboard, plaster, wood, metal doors and frames, etc.) shall meet the VOC limitations of the Green Seal Paint Standard GS-11, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:
5. Volatile Organic Compounds:
- a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.
- Interior Paints and Primers:  
 Non-flat: 150 g/l  
 Flat: 50 g/l  
 The calculation of VOC shall exclude water and tinting color added at the point of sale.



- B. Anti-Corrosive and Anti-Rust Paints: Anti-corrosive and anti-rust paints applied to interior ferrous metal substrates shall meet the VOC limitations of the Green Seal Paint Standard GC-03, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:
  - 1. Volatile Organic Compounds:

- a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Anti-Corrosive and Anti-Rust Paints: 250 g/l

The calculation of VOC shall exclude water and tinting color added at the point of sale.

**1.11 VOC REQUIREMENTS FOR INTERIOR COATINGS:**

- A. Clear wood finishes, floor coatings, stains, sealers, and shellacs applied to the interior shall meet the VOC limitations defined in Rule 1113, "Architectural Coatings" of SCAQMD, of the State of California. The VOC limits defined by SCAQMD, based on 7/9/04 amendments, are as follows. VOC limits are defined in grams per liter, less water and less exempt compounds.

1. Clear Wood Finishes:	
a. Varnish	350
b. Sanding Sealers	350
c. Lacquer	550
2. Shellac:	
a. Clear	730
b. Pigmented	550
3. Stains	250
4. Floor Coatings	100
5. Waterproofing Sealers	250
6. Sanding Sealers	275
7. Other Sealers	200

The calculation of VOC shall exclude water and tinting color added at the point of sale.

**1.12 SUBMITTALS:**

- A. Submit Material Safety Data Sheets, for all applicable products in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Applicable products include, but are not limited to adhesives, sealants, carpets, paints and coatings. Material Safety Data Sheets shall indicate the Volatile Organic Compound (VOC) limits of products submitted. (If an MSDS does not include a product's VOC limits, then product data sheets, manufacturer literature, or a letter of certification from the manufacturer can be submitted in addition to the MSDS to indicate the VOC limits).
- B. Submit Environmental Building Materials Certification Form (EBMCF) as referenced in Section 01 81 13 SUSTAINABLE REQUIREMENTS FOR LEED BUILDINGS: For each field-applied adhesive, sealant, paint, and coating product, provide the VOC requirement, as provided in this Specification, for the relevant material category indicated on the documentation noted above.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 81 13.13**



**SECTION 01 81 19  
INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 19**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

**1.2 CONSTRUCTION IAQ MANAGEMENT GOALS FOR THE PROJECT:**

- A. The City of New York has determined that this Project shall minimize the detrimental impacts on Indoor Air Quality (IAQ) resulting from construction activities. Factors that contaminate indoor air, such as dust entering HVAC systems and ductwork, improper storage of materials on-site, poor housekeeping, shall be minimized.

**1.3 RELATED SECTIONS:**

- A. All sections of the Specifications related to interior construction, MEP systems, and items affecting indoor air quality.
- B. Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
- C. Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
- D. Division 9 (of the Specifications): Finishes.

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Volatile Organic Compounds (VOC's): Chemical compounds common in and emitted by many building products, including solvents in paints, coatings, adhesives and sealants, wood preservatives, composite wood binder, and foam insulations. Not all VOC's are harmful, but many of those contained within building products contribute to the formation of smog and may irritate building occupants by their smell and/or health impact.



- D. Materials that act as “sinks” for VOC contamination: Absorptive materials, typically dry and soft materials (such as textiles, carpeting, acoustical ceiling tiles and gypsum board) that readily absorb VOC’s emitted by “source” materials and release them over a prolonged period of time.
- E. Materials that act as “sources” for VOC contamination: Products with high VOC contents that emit VOC’s either rapidly during application and curing (typically “wet” products, such as paints, sealants, adhesives, caulks and sealers) or over a prolonged period (typically “dry” products such as flooring coverings with plasticizers and engineered wood with formaldehyde).

#### 1.5 REFERENCES, RESOURCES:

- A. “IAQ Guidelines for Occupied Buildings Under Construction”, First Edition, November 1995, The Sheet Metal and Air Conditioner Contractors National Association (SMACNA). (703) 803-2980, [www.smacna.org](http://www.smacna.org).
- B. ANSI/ASHRAE 52.2-1999, “Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size”, [www.ashrae.org](http://www.ashrae.org)

#### 1.6 LEED BUILDING GENERAL REQUIREMENTS:

- A. Implement practices and procedures as necessary to meet the project’s environmental performance goals as set forth in the specific requirements of this section. Specific project goals that may impact this area of work include: use of recycled-content materials; use of low-emitting materials; construction waste recycling; and the implementation of a construction indoor air quality management plan. Ensure that the requirements related to these goals, as defined in this Section, are implemented to the fullest extent. Substitutions or other changes to the work shall not be allowed if such changes compromise the stated LEED BUILDING Performance Criteria.

#### 1.7 CONSTRUCTION IAQ MANAGEMENT PLAN:

- A. The Contractor shall prepare and implement a Construction IAQ Management Plan in coordination with each subcontractor and submit the IAQ Management Plan to the Commissioner for approval in accordance with Section 01 33 00, SUBMITTAL PROCEDURE. The Construction IAQ Management Plan shall meet the following criteria:
  - 1. Construction activities shall be planned to meet or exceed the minimum requirements of the Sheet Metal and Air Conditioning National Contractors’ Association (SMACNA) “IAQ Guidelines for Occupied Buildings Under Construction”, Third Edition, 2007.
  - 2. Absorptive materials shall be protected from moisture damage when stored on-site and after installation.
  - 3. If air handlers are to be used during construction, filtration media with a Minimum Efficiency Reporting Value (MERV) of 8 must be used at each return air grill, as determined by ASHRAE 52.2-1999.
  - 4. Filtration media shall be replaced immediately prior to occupancy. Filtration media shall have a Minimum Efficiency Reporting Value (MERV) of 13 as determined by ASHRAE 52.2-1999 if the project is pursuing Indoor Air Quality Credit 5: Indoor Chemical Pollutant Source Control.
  - 5. A “Sequence of Finish Installation Plan” shall be developed, highlighting measures to reduce the absorption of VOCs by materials that act as “sinks”.
  - 6. Upon approval of the Plan by the Commissioner, it shall be implemented by the Contractor through the duration of the construction process, and documented in accordance with the Submittal Requirements of Sub-Section 1.8 herein.
- B. Further description of the Construction IAQ Management Plan requirements is as follows:

1. SMACNA Guidelines: Chapter 3 of the referenced "IAQ Guidelines for Occupied Buildings Under Construction", outline IAQ measures in five categories as listed below. The Construction IAQ Management Plan shall be organized in accordance with the SMACNA format, and shall address measures to be implemented in each of the five categories (including subsections). All subsections shall be listed in the Plan; items that are not applicable for this project should be listed as such.
  - a. HVAC Protection
    - 1) Protect air handling and distribution equipment and air supply and return ducting during construction.
    - 2) All ductwork arriving on site will be sealed with plastic sheeting and stored on pallets or dunnage until installed.
    - 3) Cover and protect all exposed air inlets and outlets, openings, grilles, ducts, plenums, etc. to prevent water, moisture, dust and other contaminant intrusion.
    - 4) Apply protection immediately after ducting.
    - 5) Protect ducting runs at the end of day's work.
    - 6) Inspect temporary filtration weekly and replace as required to maintain the proper ventilation rates in the building.
  - b. Source Control
    - 1) Protect stored on-site or installed absorptive or porous materials.
    - 2) Do not use wet or damaged porous materials in the building.
    - 3) Recover, isolate, and ventilate containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications.
    - 4) Exhaust fumes from idling vehicles and gasoline fueled tools through use of funnels or temporary piping.
    - 5) Containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, shall be closed when not in use.
  - c. Pathway Interruption
    - 1) Depressurize work areas to contain dust and odors.
    - 2) Pressurize occupied spaces to prevent intrusion of dust and odors.
    - 3) Erect barriers to contain construction areas.
    - 4) Relocate pollutant sources.
    - 5) Temporarily seal the building and provide 100% outside air for ventilation.
  - d. Housekeeping
    - 1) Store materials on elevated platforms under cover, in a designated dry, clean location, prior to unpacking for installation.
    - 2) If materials are not stored in an enclosed location, cover tops and sides of material with waterproof sheeting, securely tied.
    - 3) Institute cleaning activities to remove contaminants from the building prior to occupancy. Clean all coils, air filters, and ductwork prior to performing testing, adjusting, and balancing of HVAC systems.
    - 4) Sweep the work area on a daily basis. Use an efficient and effective dust collecting method such as damp cloth, wet mop, or vacuum with particulate filters. Activities which produce high levels of dust shall be cleaned up immediately upon completion.
    - 5) Spills or excess applications of products containing solvents, or with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, must be removed immediately.
    - 6) Dust all walls prior to application of finishes.
    - 7) Vacuum all stud tracks prior to application of insulation.
    - 8) Materials which become contaminated through direct exposure to moisture from precipitation, plumbing leaks, or condensation shall be replaced by the Contractor.
  - e. Scheduling
    - 1) Phase construction such that absorptive materials are installed only in areas that are



- weathertight.
- 2) Schedule activities that utilize “sources” of VOC contamination to take place prior to installing high absorbent materials that will act as “sinks” for contaminants.
  - 3) Review of the appropriate components of the Construction IAQ Management Plan shall be a regular action topic at weekly site coordination meetings. Implementation of the Plan shall be documented in the meeting minutes.
2. Protection of Materials from Moisture Damage: As part of the “Housekeeping” section of the Construction IAQ Management Plan, measures to prevent installed materials or material stored on-site from moisture damage shall be described. This section should also describe measures to be taken if moisture damage does occur to absorptive materials during the course of construction.
  3. Replacement of Filtration Media: Under the “HVAC Protection” section of the Construction IAQ Management Plan, a description of the filtration media in all ventilation equipment shall be provided. The description shall include replacement criteria for filtration media during construction, and confirmation of filtration media replacement for all equipment immediately prior to occupancy.
  4. Sequence of Finish Installation for Materials: Where feasible, absorptive materials shall be installed after the installation of materials or finishes which have high short-term emissions of VOC's, formaldehyde, particulates, or other air-borne compounds. Absorptive materials include, but are not limited to: carpets; acoustical ceiling panels; fabric wall coverings; insulations (exposed to the airstream); upholstered furnishings; and other woven, fibrous or porous materials. Materials with high short-term emissions include, but are not limited to: adhesives, sealants and glazing compounds (specifically those with petrochemical vehicles or carriers); paints, wood preservatives and finishes; control and/or expansion joint fillers; hard finishes requiring adhesive installation; gypsum board (with associated finish processes and products); and composite or engineered wood products with formaldehyde binders.
  5. Develop and implement an Indoor Air Quality (IAQ) Management Plan for the pre-occupancy phase as follows:

OPTION 1 — Flush-Out

• After construction ends, prior to occupancy and with all interior finishes installed, perform a building flush-out by supplying a total air volume of 14,000 cu.ft. of outdoor air per sq.ft. of floor area while maintaining an internal temperature of at least 60 degrees F and relative humidity no higher than 60%.

OR

• If occupancy is desired prior to completion of the flush-out, the space may be occupied following delivery of a minimum of 3,500 cu.ft. of outdoor air per sq.ft. of floor area to the space. Once a space is occupied, it shall be ventilated at a minimum rate of 0.30 cfm/sq.ft. of outside air or the design minimum outside air rate determined in EQ Prerequisite 1, whichever is greater. During each day of the flush-out period, ventilation shall begin a minimum of three hours prior to occupancy and continue during occupancy. These conditions shall be maintained until a total of 14,000 cu.ft./sq.ft. of outside air has been delivered to the space.

OR

OPTION 2 — Air Testing

• Conduct baseline IAQ testing, after construction ends and prior to occupancy, using testing protocols consistent with the United States Environmental Protection Agency Compendium of



Methods for the Determination of Air Pollutants in Indoor Air and as additionally detailed in the LEED-NC Reference Guide.

- Demonstrate that the contaminant maximum concentrations listed below are not exceeded.

CONTAMINANT	MAXIMUM CONCENTRATION
Formaldehyde	27 parts per billion
Particulates (PM10)	50 micrograms per cubic meter
Total Volatile Organic Compounds (TVOC)	500 micrograms per cubic meter
* 4-Phenylcyclohexene (4-PCH)	6.5 micrograms per cubic meter
Carbon Monoxide (CO)	9 part per million and no greater than 2 parts per million above outdoor levels
* This test is only required if carpets and fabrics with styrene butadiene rubber (SBR) latex backing material are installed as part of the base building systems.	

- For each sampling point where the maximum concentration limits are exceeded, conduct additional flush-out with outside air and retest the specific parameter(s) exceeded to indicate the requirements are achieved. Repeat procedure until all requirements have been met. When retesting non-complying building areas, take samples from the same locations as in the first test.

- The air sample testing shall be conducted as follows:

- a. All measurements shall be conducted prior to occupancy, but during normal occupied hours and with the building ventilation system starting at the normal daily start time and operated at the minimum outside air flow rate for the occupied mode throughout the duration of the air testing.
  - b. The building shall have all interior finishes installed, including but not limited to millwork, doors, paint, carpet and acoustic tiles. Non-fixed furnishings such as workstations and partitions are encouraged, but not required, to be in place for the testing.
  - c. The number of sampling locations will vary depending upon the size of the building and number of ventilation systems. For each portion of the building served by a separate ventilation system, the number of sampling points shall not be less than one per 25,000 sq.ft., or for each contiguous floor area, whichever is larger, and include areas with the least ventilation and greatest presumed source strength.
  - d. Air samples shall be collected between 3 feet and 6 feet from the floor to represent the breathing zone of occupants, and over a minimum 4-hour period.
6. Implementation and Coordination: Implement the Construction IAQ Management Plan, and coordinate the Plan with all affected trades. Designate one individual as the Construction IAQ Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation. Include provisions in the Construction IAQ Management Plan for addressing conditions in the field that do not adhere to the Plan, including provisions to implement a stop work order, or to rectify non-compliant conditions.
- a. Distribution: The Contractor shall distribute copies of the Construction IAQ Management Plan in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
  - b. Instruction: The Contractor shall provide on-site instruction of appropriate site management to all Contractor's Subcontractors.



- c. Monitoring: The Construction IAQ Representative shall monitor the implementation of the Construction IAQ Management Plan.

**1.8 SUBMITTALS:**

Submit the following LEED-required records and documents in accordance with Section 01 33 00, SUBMITTAL PROCEDURES and Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.

- A. A copy of the Construction IAQ Management Plan as defined in Sub-Section 1.7 herein.
- B. Product cut-sheets for all filtration media used during construction and installed immediately prior to occupancy, with MERV values highlighted. Cut sheets shall be submitted with the Contractor's or Subcontractor's 'approved' stamp as confirmation that the products are the products installed on the project.
- C. Provide the Commissioner with a minimum of 18 photographs as required under the provision for Special Photographs, in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION, comprised of at least six photographs taken on three different occasions during construction. The photographs shall document the implementation of the Construction IAQ Management Plan throughout the course of the project construction. Examples include photographs of ductwork sealing and protection, temporary ventilation measures, and conditions of on-site materials storage (to prevent moisture damage). Photographs shall include integral date stamping, and shall be submitted with brief descriptions of the Construction IAQ Management Plan measure documented, or be referenced to project meeting minutes or similar project documents which reference to the Construction IAQ Management Plan measure documented.
- D. A copy of the project's TAQ Testing report if applicable.

**1.9 QUALITY ASSURANCE:**

- A. The Contractor shall be responsible for preparing and implementing the Construction IAQ Management Plan and shall coordinate and incorporate the work of its subcontractors in the IAQ Management Plan.
- B. Responsibility of Subcontractors: Subcontractors for this project shall be responsible to cooperate with the Contractor in the preparation and implementation of the Construction IAQ Management Plan.

**PART II – PRODUCTS (Not Used)**

**PART III – EXECUTION (Not Used)**

**END OF SECTION 01 81 19**



**SECTION 01 91 13**  
**GENERAL COMMISSIONING REQUIREMENTS**

**REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 91 13**

**PART I – GENERAL**

**1.1 RELATED DOCUMENTS:**

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. OPR and BoD documentation are included by reference for information only.
- C. The Commissioning Plan, prepared by the Commissioning Agent (CxA) under separate contract with the City of New York, contains requirements that apply to this section.

**1.2 SUMMARY:**

- A. This Section includes general requirements that apply to implementation of Commissioning without regard to systems, subsystems, and equipment being commissioned.
- B. This Section includes:
  - 1. Definitions
  - 2. Commissioning Team
  - 3. City's Responsibilities
  - 4. Each Contractor's Responsibilities
  - 5. Commissioning Authority's/Agent's (CxA) Responsibilities
  - 6. Commissioning Documentation
  - 7. Submittals
  - 8. Coordination

**1.3 RELATED SECTIONS:** Include without limitation the following:

- A. "HVAC Commissioning Requirements" indicated in other sections of the project specifications for specific requirements for commissioning HVAC systems.
- B. This project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED procedures, and specific commissioning requirements of the Project Specifications, whichever is more stringent. The Contractor shall cooperate with the CxA and provide whatever assistance is required.
- C. Related Sections include without limitation the following:
  - 1. Section 01 10 00 SUMMARY
  - 2. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
  - 3. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
  - 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
  - 5. Section 01 79 00 DEMONSTRATION AND TRAINING
  - 6. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

**1.4 DEFINITIONS:**

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioner: The Commissioner of the Department of Design and Construction of the City of New York, his/her successors, or duly authorized representative(s).
- D. BoD: Basis of Design: A document, prepared by the Consultant Architect/Engineer, that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that support the design process.
- E. Commissioning Plan: A document that outlines the organization, schedule, allocation of resources, and documentation requirements of the commissioning process.
- F. CxA: Commissioning Agent (Aka Commissioning Authority) under separate contract with the City of New York to provide Commissioning Services for this project.
- G. OPR: Owner's (City of New York) Project Requirements: A document, prepared by the Consulting Architect/Engineer that details the functional requirements of a project and the expectations of how it will be used and operated. These include Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.
- H. Systems, Subsystems, Equipment, and Components: Where these terms are used together or separately, they shall mean "as-built" systems, subsystems, equipment, and components.
- I. TAB: Testing, Adjusting, and Balancing.

#### 1.5 COMMISSIONING TEAM:

- A. Members Appointed by the Contractor and its Subcontractors: Individuals, each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions. The Commissioning Team shall consist of, but not be limited to, representatives of the Contractor, including Project superintendent and subcontractors, installers, suppliers, and specialists deemed appropriate by the CxA.
- B. Members Appointed by the City:
  - 1. Commissioning Authority/Agent (CxA): The designated person, company, or entity under separate contract with the City that plans, schedules, and coordinates the commissioning team to implement the commissioning process.
  - 2. Representatives of the facility user and operation and maintenance personnel.
  - 3. Consultant Architect/Engineer and other concerned entities.

#### 1.6 CITY'S RESPONSIBILITIES:

- A. Provide the OPR documentation to the Commissioning Agent (CxA) for use in developing the commissioning plan; systems manual; operation and maintenance training plan; and testing plans and checklists.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities.

- C. Provide the BoD documents, prepared by the Consulting Architect/Engineer and approved by the Commissioner, to the Commissioning Agent (CxA) for use in developing the commissioning plan, systems manual, and operation and maintenance training plan.

#### 1.7 CONTRACTOR'S RESPONSIBILITIES:

- A. The Contractor shall provide utility services required for the commissioning process.
- B. As a member of the Commissioning Team, the Contractor and subcontractor(s) shall assign representatives with expertise and authority to act on behalf of the Contractor and its subcontractor(s) and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
  - 1. Participate in scheduled construction-phase coordination and commissioning team meetings.
  - 2. Integrate and coordinate commissioning process activities with the construction schedule.
  - 3. Review and accept commissioning process test procedures provided by the CxA.
  - 4. Review and accept construction checklists provided by the CxA.
  - 5. Perform testing required in the Commissioning Schedule as per the Commissioning Process test procedures provided by the CxA.
  - 6. Complete installation checklists as Work is completed and return to CxA through the Resident Engineer.
  - 7. Cooperate with the CxA for resolution of issues recorded in the Issues Log.
  - 8. Evaluate performance deficiencies identified in test reports and, in collaboration with entity responsible for system and equipment installation, recommend corrective action.
  - 9. Submit As-Built documents, operation and maintenance manuals for systems and subsystems, and equipment in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.
  - 10. Provide orientation sessions for operation and maintenance personnel (sessions will be video recorded by the CxA) in accordance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

#### 1.8 COMMISSIONING AGENT'S (CxA) RESPONSIBILITIES:

- A. Organize and lead the commissioning team.
- B. Prepare a construction-phase commissioning plan. Collaborate through the Resident Engineer with each Contractor and with subcontractors to develop test and inspection procedures. Include design changes and coordinate commissioning activities with the overall Project schedule. Identify commissioning team member responsibilities, by name, firm, and trade specialty, for performance of each commissioning task.
- C. Review and comment in accordance with Section 01 33 00, SUBMITTAL PROCEDURES, on submittals from the Contractor for compliance with the OPR, BoD, Contract Documents, and construction-phase commissioning plan. Review and comment on performance expectations of systems and equipment and interface between systems relating to the OPR and BoD.
- D. Coordinate with the Resident Engineer to convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss progress of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent (CxA) will prepare and distribute minutes to commissioning team members and attendees within three workdays of the commissioning meeting.
- E. At the beginning of the construction phase, coordinate with the Resident Engineer's kick-off meeting schedule to conduct an initial construction-phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals, operation and maintenance training sessions, TAB Work, and Project completion.



- F. Observe and inspect construction. Report progress and deficiencies to the Commissioner. In addition to compliance with the OPR, BoD, and Contract Documents, inspect systems and equipment installation for adequate accessibility required for component maintenance replacement and repair.
- G. Prepare Project-specific test and inspection procedures and checklists.
- H. Coordinate with the Resident Engineer to schedule, direct, witness, and document tests, inspections, and systems startup.
- I. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.
- J. Certify date of acceptance and startup for each item of equipment for start of warranty periods.
- K. Review and comment on operation and maintenance documentation and systems manual outline for compliance with the OPR, BoD, and Contract Documents. Operation and maintenance documentation requirements are specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS.
- L. Record and edit demonstration and orientation sessions on DVD.
- M. Prepare commissioning reports.
- N. Assemble the final commissioning documentation, including the commissioning report and Systems Manual.

#### 1.9 COMMISSIONING DOCUMENTATION:

The Contractor shall assist the Commissioning Agent (CxA) in the development and compiling of the following Commissioning Documentation:

- A. Index of Commissioning Documents: The Commissioning Agent (CxA) will prepare an index including the storage location of each document.
- B. OPR: A written document prepared by the Consulting Architect/Engineer that details the functional requirements of the Project and expectations of how it will be used and operated. This document includes the Project and design goals, measurable performance criteria, budgets, schedules, success criteria, and supporting information.
- C. BoD Document: A document prepared by the Consulting Architect/Engineer that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that explain the designed systems.
- D. Commissioning Plan: A document prepared by the Commissioning Agent (CxA) that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process.
- E. Test Checklists: The Commissioning Agent (CxA) will develop test checklists for each system, subsystem, or equipment including interfaces and interlocks, and include a separate entry, with space for comments, for each item to be tested. The CxA will prepare separate checklists for each mode of operation and provide space to indicate whether the mode under test responded as required. Space will be provided for testing personnel to sign off on each checklist. Specific checklist content requirements are specified in other sections of the project specifications.
- F. Inspection Checklists will be signed by the Contractor, Subcontractor(s), Installer(s), and CxA certifying that systems, subsystems, equipment, and associated controls are ready for testing.
- G. Test and Inspection Reports: The Commissioning Agent (CxA) will record test data, observations, and measurements on test checklists. Photographs, forms, and other means appropriate for the application will be included with data. CxA shall compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.



- H. Corrective Action Documents: The Commissioning Agent (CxA) will document corrective action taken for systems and equipment that fail tests and include required modifications to systems and equipment and revisions to test procedures, if any. The Contractor shall retest systems and equipment requiring corrective action. The CxA will document retest results.
- I. Issues Log: The Commissioning Agent (CxA) will prepare and maintain an issues log that describes design, installation, and performance issues that are at variance with the OPR, BoD, and Contract Documents. The log will identify and track issues as they are encountered, documenting the status of unresolved and resolved issues.
  - 1. Commissioning Report: The Commissioning Agent (CxA) will document results of the commissioning process including unresolved issues and performance of systems, subsystems, and equipment. The commissioning report will indicate whether systems, subsystems, and equipment have been completed and are performing according to the OPR, BoD, and Contract Documents.
- J. Systems Manual: The Commissioning Agent (CxA) will gather required information and compile systems manual as specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS..

#### 1.10 SUBMITTALS:

- A. Commissioning Plan Pre-final Submittal: The Commissioning Agent (CxA) will submit six (6) copies of the pre-final commissioning plan to the Commissioner for review and distribution.
- B. Commissioning Plan Final Submittal: The Commissioning Agent (CxA) will submit six (6) hard copies and electronically formatted information of the final commissioning plan to the Commissioner. The final submittal will address previous review comments.
- C. Test and Inspection Reports: CxA will submit test and inspection reports.
- D. Corrective Action Documents: CxA will submit corrective action documents.

#### 1.11 COORDINATION:

- A. Coordinating Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer's regularly scheduled construction progress meetings to conduct coordination meetings of the commissioning team to review progress on the commissioning plan, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- B. Pre-testing Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer to conduct pretest meetings of the commissioning team to review startup reports, pretest inspection results, testing procedures, testing personnel and instrumentation requirements, and manufacturers' authorized service representative services for each system, subsystem, equipment, and component to be tested.
- C. Testing Coordination: The Commissioning Agent (CxA) will coordinate with the Resident Engineer the sequence of testing activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
  - 1. Coordinate schedule times with the Resident Engineer for tests, inspections, obtaining samples, and similar activities.
- D. Manufacturers' Field Services: The Commissioning Agent (CxA) will coordinate services of manufacturers' field services.

#### PART II – PRODUCTS (Not Used)

## PART III – EXECUTION

### 3.1 OPERATION & MAINTENANCE MANUALS

#### A. General

1. The CxA shall review the Operation & Maintenance manuals provided by the Contractor or subcontractors for completeness of the document. The review process shall verify that Operation & Maintenance instructions meet specifications and are included for all commissioned equipment furnished by the Contractor.
2. Published literature shall be specifically oriented to the provided equipment, indicating required operation and maintenance procedures, parts lists, assembly / disassembly diagrams and related information.
3. The Contractor shall incorporate the standard technical literature into system specific formats for this facility as designed and as actually installed. The resulting Operation & Maintenance information shall be system specific, concise, to the point and tailored specifically to this facility. The CxA shall review these documents as necessary for final corrections by the Contractor.

- B. The Operation & Maintenance Manual review and coordination efforts shall be completed prior to Owner orientation sessions, as these documents are to be utilized in the training sessions.

#### C. System Operations Manual

1. The CxA shall prepare and deliver these documents with inputs from other agencies. The contractors will confirm the proper documents are onsite and readily available. Typically, the manual includes the following:
  - a. Commissioned systems single line diagrams (Mechanical, Electrical, Plumbing, and Building Management System (BMS) subcontractors).
  - b. As built sequences of operations, control drawings and original set points (Design Consultant and BMS subcontractor)
  - c. Operating instructions for integrated building systems (mechanical and BMS subcontractors).
  - d. Recommended schedule of maintenance requirements and frequency (subcontractors).
  - e. Recommended schedule for calibrating sensors and actuators (BMS subcontractor)

### 3.2 DEMONSTRATION AND INSTRUCTION

- A. The Contractor shall schedule and coordinate instruction sessions for the facility's staff for each commissioned system. Demonstrations shall be held per Contract Documents, along with the appropriate schematics, handouts and visual / audio training aids onsite with equipment.
- B. The equipment vendors shall provide instruction on the specifics of each major equipment item including philosophy, troubleshooting and repair techniques.
- C. For additional prescription pertinent to instruction, refer to other specific divisions for demonstration and instruction requirements.

### 3.3 WARRANTY REVIEW / SEASONAL TESTING

- A. The CxA will return upon the start of the new season (cooling or heating) after project completion to conduct performance tests that could not be performed due to ambient conditions. The seasonal testing will only be performed if unsuitable loads / conditions were unavailable during the performance testing stages (in other words; the requirement for testing is warranted).
- B. If agreed upon by facility, Seasonal Testing can also be used for the Warranty Review. During which the CxA will interview the occupants, maintenance staff, review the operation of the building, provide recommendations for installation and operational problems and document warranty and operational issues in the issues database.



NEW YORK CITY DEPARTMENT OF  
DESIGN + CONSTRUCTION

### 3.4 RECORD DRAWINGS

- A. The CxA shall review the as built contract documents to verify incorporation of both design changes and as built construction details. Discrepancies noted shall be corrected by the appropriate party.

END OF SECTION 01 91 13



No Text

FMS ID: PVC341-M



**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

**Contract for Furnishing all Labor and Material Necessary and Required for:**

**CONTRACT NO. 1 GENERAL CONSTRUCTION WORK**

**Historic Richmond Town Utilities  
Upgrade**

**LOCATION: 441 Clarke Avenue  
BOROUGH: Staten Island 10306  
CITY OF NEW YORK**

*JR Cruz Corp.*

Contractor

Dated *February 18,* , 20 *15*

Approved as to Form  
Certified as to Legal Authority

*[Signature]*

*[Signature]*

Acting Corporation Counsel

Dated *July 22* , 20 *14*

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated \_\_\_\_\_ , 20 \_\_\_\_\_





PROJECT ID:

PVC341-M

**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE  
LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000  
WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

**VOLUME 3 OF 3**

**ADDENDUM TO THE GENERAL  
CONDITIONS**

**ADDENDA No. 1 to 3**

FOR FURNISHING ALL LABOR AND MATERIALS  
NECESSARY AND REQUIRED FOR:

**Historic Richmond Town Utilities  
Upgrade**

LOCATION:  
BOROUGH:  
CITY OF NEW YORK

441 Clarke Avenue  
Staten Island 10306

CONTRACT NO. 1

GENERAL CONSTRUCTION WORK

Dept of Cultural Affairs

Stantec Consulting Services, Inc.

Date:

June 9, 2014



W4-123

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

ADDENDUM TO THE GENERAL CONDITIONS  
FOR SINGLE CONTRACT PROJECTS

---

The General Conditions are hereby amended in accordance  
with the terms and conditions set forth in this Addendum.

---

I. PROJECT DESCRIPTION

FMS #: *PVC341-M*

PROJECT NAME: *Historic Richmond Town Museum Utility Upgrades*

PROJECT DESCRIPTION: The scope of this project involves repaving the streets at the center of Historic Richmond Town: Center Street, Tysen Court, and Court Place, which are all in a state of disrepair. In addition to resurfacing these roads, the scope of work also includes new street lighting, and below grade infrastructure upgrades including electrical, telephone and cable services, as well as water and sewer work.

Work consists of:

- *Sewer:* Scope of work includes private sanitary sewer system internal to block 4441 with sanitary sewer connections to DEP sewers in Clarke Avenue and St. Patrick's Place.
- *Water Mains:* Scope of work consists of abandonment and capping of existing DEP water mains in Tysen Court, Center Street and Court Place. Work includes new 8" diameter private water main with connections to DEP water mains in St. Patrick's Place and Clarke Avenue via wet tap and double check valves.
- *Electrical:* The electrical scope of work is to provide a new single metered Con Ed electrical service for the site and remove the existing overhead utility lines, transformers and poles, powering individual metered building services. The new site service includes a primary feed to a ground mounted transformer located on site, powering a new electric distribution system providing service to the required Historic Richmond Town Buildings from one central service locations; with the exception of one separately fed building (Stephen's-Prier House) where the existing overhead Con Ed metered service shall be replaced with an underground Con Ed metered service.
- *Data:* A new underground Data Network is proposed throughout the Historic Richmond Town site, replacing the existing overhead facility. The project scope is to install pull boxes and an underground conduit system to accommodate the new Network. The contractor shall also be responsible for coordination with the utility company (Time Warner Cable) to install the new Network cable, connection to the existing building services and the removal of the existing overhead utility lines.
- *Telephone:* A new underground Telephone service is proposed throughout the Historic Richmond Town site, replacing the existing overhead facility. The project scope is to install pull boxes and an underground conduit system to accommodate telephone cable from the service point to each designated building on site. The contractor shall be responsible for installing the telephone distribution cable, interconnecting the existing buildings and connect to the existing telephone equipment. The contractor shall also coordination with the utility company (Verizon), who will install the new main telephone service cable and connect to the existing telephone service point. Verizon shall then remove their existing overhead service cable and the contractor shall remove all the remaining overhead telephone distribution cable on site.

The portion of Project PVC341-M which is described in Addendum Nos. 1 and 2, and consists of **A-060000 Building Architectural Work, C-271343 Telephone Cable, E-260010 Building Electrical Work and portions of 56.00 Mechanical, Electrical and Plumbing (MEP)** encompasses work to the interior and exterior of existing buildings throughout Historic Richmond Town.



All work described in Section A-060000, C-271343, E-260010 and Items 56.40 and 56.50 of Section 56.00 are a part of Project PVC341-M and is fully integrated within and coordinated with the work described in Project PVC341-M.

PROJECT LOCATION: **441 Clarke Avenue**  
BOROUGH: **Staten Island**  
CITY OF NEW YORK  
ZIP CODE: **10306**  
COMMUNITY BOARD #: **2**

**LANDMARK STATUS:**

DESIGNATED LANDMARK STRUCTURE OR SITE: **YES**

*If this is a Designated Landmark Structure or Site, Section 01 3591, Historic Treatment Procedures applies to this project.*

LANDMARK QUALITY STRUCTURE: **YES**

*If this is a Landmark Quality Structure, Section 01 3591, Historic Treatment Procedures applies to this project.*

**II. LEED GREEN BUILDING REQUIREMENTS**

**NOT USED**

**III. COMMISSIONING REQUIREMENTS**

**NOT USED**

**IV. PROJECT MANAGEMENT**

DDC shall publicly bid and enter into all contracts for the Project. DDC shall manage the Project using its own personnel.

DDC shall publicly bid and enter into all contracts for the Project. A Construction Management firm (the "CM") hired by DDC shall manage the Project. The Contractor is advised that the CM shall serve as the representative of the Commissioner at the site and shall, subject to review by the Commissioner, be responsible for the inspection, management, coordination and administration of the required construction work, as delineated in the article of the Standard Construction Contract entitled "The Resident Engineer".

**V. CONTRACTS FOR THE PROJECT**

The Project consists of a single contract, the Contract for General Construction Work. The Contractor for General Construction Work is responsible for the performance of all required work for the Project as set forth in the Contract Documents (General Conditions, Drawings and Specifications), including all responsibilities and obligations assigned to separate Contractors for the following subdivisions of the work: Plumbing Work, HVAC Work, and Electrical Work. All responsibilities and obligations in the Contract Documents assigned to separate Contractors for such subdivisions of the work are the responsibility of the Contractor for General Construction Work.

**VI. SCHEDULES**

The Contractor is advised that Schedules A through F are attached to, and incorporated as part of, this Addendum to the General Conditions. These schedules contain important information that is specific to this Project. The Contractor is advised to carefully review these schedules.

## VII. APPLICABILITY OF SECTIONS/SUB-SECTIONS AND AMENDED SUB-SECTIONS

The Contractor is advised that various Sections/Sub-Sections in the General Conditions may not apply to this Project or may apply as amended. Such Sections/Sub-Sections advise the Contractor to "Refer to the Addendum for the applicability of this Section/Sub-Section." Such Sections/Sub-Sections are set forth below. A check mark indicates whether the Section/Sub-Section (1) applies to the Project, (2) does not apply to the Project, or (3) applies to the Project as amended. If no box is checked, the Section/Sub-Section, as set forth in the General Conditions, applies to the Project. Amended Sections/Sub-Sections, if any, are set forth following this list of Sections.

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	Applies	Does not Apply	Applies as Amended
01 1000	1.4 (B)	Scope and Intent / LEED		X	
	1.4(C)	Scope and Intent / Commissioning		X	
01 3233		Photographic Documentation	X		
01 3300	1.7 (A-D)	LEED Submittals		X	
01 3503		General Mechanical Requirements		X	
01 3506	3.2 (A-B)	Electrical Conduit System Including Boxes (Pull, Junction and Outlet)	X		
	3.3 (A-E)	Electrical Wiring Devices	X		
	3.4 (A-I)	Electrical Conductors and Terminations	X		
	3.5 (A-B)	Circuit Protective Devices	X		
	3.6 (A-J)	Distribution Centers	X		
	3.7 (A-I)	Motors	X		
	3.8 (A-I)	Motor Control Equipment	X		
01 3591		Historic Treatment Procedures	X		
01 5000		Temporary Facilities, Services and Controls – <u>REFER TO HIGHWAY SPECIFICATIONS AND ADDENDA FOR TEMPORARY FACILITIES, SERVICES AND CONTROLS</u>			X

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
<b>01 5411</b>		Temporary Elevators and Hoists		X	
	3.2 (A-M)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Over 15 Stories		X	
	3.3 (A-E)	Temporary Use, Operation and Maintenance of Elevators During Construction for Existing Buildings		X	
<b>01 7300</b>	3.3 (A-I)	Surveys	X		
	3.4 (A-B)	Borings	X		
	3.12 (A-D)	Sleeves and Hangers	X		
	3.13 (A)	Sleeve and Penetration Drawings	X		
	3.15 (A)	Location of Partitions	X		
<b>01 7419</b>	1.5 (C)	Waste Management Performance Requirements / LEED Certification		X	
<b>01 7900</b>		Demonstration and Owner's Pre-Acceptance Orientation			
	3.2 (A)	Non-Commissioned Projects	X		
	3.2 (B)	Commissioned Projects		X	
<b>01 8113</b>		Sustainable Design Requirements for LEED Buildings		X	
<b>01 8113.13</b>		VOC Limits for Adhesives, Sealants, Paints and Coatings for LEED Buildings		X	
<b>01 8119</b>		Indoor Air Quality Requirements for LEED Buildings		X	
<b>01 9113</b>		General Commissioning Requirements		X	

## ADDITIONAL SECTIONS/SUB-SECTIONS

The Contractor is advised that the additional Sub-Sections set forth below are included in the General Conditions and apply to the Project.

### **Section 01 1000 Summary**

**Add the following Sub-Section:**

#### **1.13 Historic Richmond Town Contractor Guidelines**

##### **Historic Richmond Town**

Historic Richmond Town is a living history village and museum complex in the neighborhood of Richmondtown, Staten Island.

Established in 1958, Historic Richmond Town is operated, maintained and managed by the Staten Island Historical Society, and owned by the City of New York. The entire facility of Historic Richmond Town is comprised of over 50 acres with more than 30 historic buildings and sites dating from the late 17th to the early 20th Century. The central village area where this project is located occupies 25 acres with 15 restored buildings, 10 of which are listed as landmarks. The village itself is not listed as a landmark.

Many cultural programs and a variety of other events take place in locations throughout the site. **Historic Richmond Town (HRT)**, seeks to make your project run as smoothly as possible by reducing conflicts that might arise between construction and HRT program schedules. Your cooperation in this matter is essential.

The contractor will be working under contract for **The New York City Department of Design and Construction, (DDC)**; and **The New York City Department of Cultural Affairs, (DCLA)**.

The contractor shall exercise extreme caution on site in the performance of all work in and around the campus in its entirety. Be reminded that cultivated landscape grounds, including trees, are to be fully protected against any possible damage during the course of construction and throughout the length of the contract. Any activity, by the contractor on site resulting in any disruption to the active and/or inactive phases shall be restored as required by the contractor to the satisfaction of HRT/DDC.

##### **Scope of Work**

The scope of this project involves repaving the streets at the center of Historic Richmond Town: Center Street, Tysen Court, and Court Place, which are all in a state of disrepair. In addition to resurfacing these roads, the scope of work also includes new street lighting, and below grade infrastructure upgrades including electrical, telephone and cable services, as well as water and sewer work.

Infrastructure upgrades consist of:

- **Sewer:** Scope of work includes private sanitary sewer system internal to block 4441 with sanitary sewer connections to DEP sewers in Clarke Avenue and St. Patrick's Place.
- **Water Mains:** Scope of work consists of abandonment and capping of existing DEP water mains in Tysen Court, Center Street and Court Place. Work includes new 8" diameter private water main with connections to DEP water mains in St. Patrick's Place and Clarke Avenue via wet tap and double check valves.
- **Electrical:** The electrical scope of work is to provide a new single metered Con Ed electrical service for the site and remove the existing overhead utility lines, transformers and poles, powering individual metered building services. The new site service includes a primary feed to a ground mounted transformer located on site, powering a new electric distribution system providing service to the required Historic Richmond Town Buildings from one central service locations; with the exception of one separately fed building (Stephen's-Prier House) where the existing overhead Con Ed metered service shall be replaced with an underground Con Ed metered service.
- **Data:** A new underground Data Network is proposed throughout the Historic Richmond Town site, replacing the existing overhead facility. The project scope is to install pull boxes and an underground conduit system to

accommodate the new Network. The contractor shall also be responsible for coordination with the utility company (Time Warner Cable) to install the new Network cable, connection to the existing building services and the removal of the existing overhead utility lines.

- **Telephone:** A new underground Telephone service is proposed throughout the Historic Richmond Town site, replacing the existing overhead facility. The project scope is to install pull boxes and an underground conduit system to accommodate telephone cable from the service point to each designated building on site. The contractor shall be responsible for installing the telephone distribution cable, interconnecting the existing buildings and connect to the existing telephone equipment. The contractor shall also coordinate with the utility company (Verizon), who will install the new main telephone service cable and connect to the existing telephone service point. Verizon shall then remove their existing overhead service cable and the contractor shall remove all the remaining overhead telephone distribution cable on site.

**HRT Contacts and General Hours of Operation**

Phone: 718.351.1611

Website: [www.historicrichmondtown.org](http://www.historicrichmondtown.org)

Ed Wiseman; Executive Director; ext.250 [ewiseman@historicrichmondtown.org](mailto:ewiseman@historicrichmondtown.org)

Joe Dazzo; Director of Facilities; ext. 350 [jdazzo@historicrichmondtown.org](mailto:jdazzo@historicrichmondtown.org)

Hours:

Open to the Public: Wednesday – Sunday from 1:00PM to 5:00PM

Guided Tours: Wednesday – Friday at 2:30PM

Saturday and Sunday at 2:00PM and 3:30PM.

**Annual Historic Richmond Town Event Schedule**

Date(s)	Duration (ccds)	Event	Notes
Saturdays from January – April	1	Tavern Concerts	Weekend Event
2 <sup>nd</sup> or 3 <sup>rd</sup> Saturday in April	1	NYC BBQ Cookoff	Weekend Event
Last Saturday in April	1	NYC Chili Cookoff	Weekend Event
1 <sup>st</sup> Saturday in May	1	Yankee Peddler Day	Weekend Event
1 <sup>st</sup> Weekend in June	2	Uncorked	Weekend Event
July 4	1	Independence Day	Holiday Event
2 <sup>nd</sup> Week in August	6	All-American Drive-In	Nighttime Event
Labor Day Weekend	3	County Fair	Holiday Event
Last Weekend in September	2	Flea Market	Weekend Event
3 <sup>rd</sup> Sunday in October	1	Old Home Day	Weekend Event
1 <sup>st</sup> Sunday/2 <sup>nd</sup> Saturday in December	2	Candle Light Tours	Weekend Event

Please note: group tours and night programs occur throughout the town Monday – Friday, year round

Campus grounds to be inspected by HRT, DDC, and the contractor prior to each event to ensure vehicle and pedestrian safety. Directional signage shall be provided by the Contractor at the discretion of HRT to direct vehicle and pedestrian traffic to avoid conflict with work areas.

**Historic Richmond Town Facilities Management**

The HRT Director of facilities is Joe Dazzo and his phone number is 718.351.1611 ext. 350;

[jdazzo@historicrichmondtown.org](mailto:jdazzo@historicrichmondtown.org). The Director of Facilities is responsible for and should be consulted regarding matters concerning overall site management, access and coordination.

*Note: Contact HRT Director of Facilities only if DDC CPM is unavailable*

**NYC Department of Parks & Recreation (NYC DPR) Regulations**

Under PlaNYC, NYC DPR-Forestry strives to preserve and protect as many trees as possible while allowing required infrastructure improvements. Contractor shall retain an approved consulting arborist that will be present during all work within tree's Critical root zone CRZ.

Additionally, Parks Forestry requests the following individual tree protection/work around measures:

- (2) Two London Planes in front of Museum: no removal of existing curb directly in front of trees. Expansion of existing curb strip can be done on either side and in front of tree with curb pieces to remain. Forestry is requesting a possible shifting of the new sidewalk to abut existing low retaining wall in front of the building to provide maximum growing area for the two trees.
- (1) One silver maple Northwest of PS28: installation of new sidewalk may require an in-field design modification to avoid tree roots. Forestry would request a curve around and/or ramp over of new sidewalk. Existing sidewalk in front of tree may need to be modified and/or partially removed to meet new sidewalk.

NYC Parks Forestry is striving to increase their success rate with tree preservation during construction activities, therefore prior to any construction approved tree protection (a minimum of 10 x 10 wood barriers with a 3" mulch layer) is to be erected around all trees schedule to remain and is to stay in place during all construction activity. Prior to construction, DPR requires all contractors working within CRZ of trees to have a DPR work permit (including concrete work). Please contact the Borough Forester for a permit to perform work around existing City street trees. Failure to comply could result in a DPR summons.

All official NYC DPR specifications pertaining to site and tree protection must be followed.

#### **Landmarks Preservation Commission (LPC) Regulations**

Contractor(s) is responsible for familiarizing themselves with drawing A-001.00 and specification section 500 in the bid documents.

Contractor shall retain an approved archeological contractor(s) to perform various services for archaeological testing, monitoring, lab testing, reporting and field observation throughout the site as determined by the Landmarks Preservation Commission (LPC) and detailed in the bid documents.

#### **Other Active Projects**

HRT may perform minor maintenance and improvements in areas outside of Scope of Work and will coordinate with GC to assure no impact will be made by any tasks they carry out.

#### **Prior to Construction Start**

Contractor is required to pre-register employees and essential vehicles to avoid costly delays as a result of site access. All contractors must contact the DDC CPM no later than two weeks in advance of the scheduled start of work, to determine whether the project will start as planned, and to pre-register employees and essential vehicles.

#### **Employee ID Badges**

Contractor to provide names of all employees authorized to work on the site. The contractor shall provide ID Badges. Employees without ID badges may be refused entry to work areas. Contractors shall wear ID cards at all times while on HRT grounds during working hours.

#### **Work-Site Vehicle ID Tags**

Only vehicles essential to the work-site will be allowed to park in specified areas near the work-site or staging area. Due to very limited visitor parking, all non-essential vehicles shall park on public streets outside the campus. **No private vehicles are allowed on site.** Provide the license plate numbers and descriptions of all work-site vehicles that need access to staging areas and/or work-sites. Designated vehicles must be pre-registered. The tags must be displayed prominently in the vehicle. Vehicles without proper tags may be ticketed.

#### **Contractor Access**

Contractor will access the project site from the Clarke Avenue visitor parking lot entrance. There is no contractor parking on site. Contractor to coordinate with HRT Director of Facilities for access to each building throughout construction duration.

#### **Construction Access**

All construction traffic should use the Primary Access Gate or Secondary Access gate only as required, unless, alternative access is designated by HRT. All vehicles must remain on designated paved roadways, NTE five (5) mph speed limit. Blocking circulation paths/narrow roadways is to be avoided. To determine the best possible route and delivery time for heavy machinery or tractor trailer deliveries, notify the DDC CPM in advance. All workers are to sign in.

#### **Staging and Work Area Enclosures**

Primary staging area is located due south of PS28 as designated on drawing PH-001.00 of the bid set. Enclosures to be provided by Contractor for all staging and work areas, including trailers, storage for materials or heavy equipment, etc., must be secured from the public. All exterior areas must be enclosed by a work fence furnished, erected and maintained as per the General Conditions. Fencing shall be stable and free standing. Gates to these enclosures must be able to be locked and Contractor to provide and maintain as approved by HRT and DDC. Temporary lighting must be provided for all staging areas.

All existing surfaces including but not limited to concrete pavers, concrete steps, metal railings, doors, wall finishes are to be protected at all times. Existing trees; plantings and turf adjacent to areas of work are to be protected at all times. Work and staging area shall be cleaned and swept daily at the end of the working day. Damaged or excess materials shall be removed and disposed of promptly. Contractor is to provide their own field trailer, as well as field trailer for DDC CPM. Trailer shall be located within staging area. Contractor is responsible for all necessary fees and permits.

#### **Tools & Materials**

HRT cannot provide tools or materials to contractors working on site and is not responsible for contractor tools, materials, etc. All tools and equipment stored in staging area shall be stored in lock box(s), HRT/DDC are not responsible for stolen or missing tools and/or materials. All contractors must restrict operations to approved mobilization and staging plans, any materials, tools, etc. not within designated areas shown on approved plans will be removed at HRT discretion. No hazardous or flammable materials may be stored within or adjacent to any building.

#### **Work Site Responsibilities**

Contractor is responsible for documenting existing conditions prior to mobilization and submitting documentation to DDC for verification. Any damages to any existing conditions are to be repaired by contractor as directed. Work site is to be clean, well-organized and compact as possible to minimize disturbance to HRT operations and visitors, with particular care to work areas adjacent to designated Landmark buildings.

#### **Restoration of Work-Site & Staging Areas**

All such areas must be restored to pre-construction conditions upon completion of work or as noted on approved plans and/or bid documents.

#### **Damages to Buildings or Landscaped or Paved Areas**

Contractors or subcontractors shall be held responsible for any damage to buildings, landscaped or paved areas. Said damage must be corrected at contractor's expense and in accordance with the DDC, DCLA, and HRT requirements. All existing materials not included in construction scope but in the opinion of HRT will be subject to potential damage, shall be removed temporarily and reinstalled after construction operations at no additional cost.

#### **Clean-Up**

Contractors are responsible for daily site clean-up and trash removal. Refer to "Section 7.13 – Maintenance of Site" of the NYCDOT Standard Highway Specifications.

#### **Trench & Excavation Areas**

The Contractor shall provide and maintain bridging and/or steel plates over any and all excavations not backfilled and restored at the end of the work period to ensure vehicle and pedestrian safety. The contractor shall be responsible for the adequacy of all bridging and/or plates and shall adjust protection as needed before leaving site.

#### **Construction Site Security**

Security of construction sites and equipment must be provided by each contractor, and cannot be guaranteed by the facility. HRT is not responsible for your tools or other property. Do not leave work areas, tools or other construction materials unsecured.

#### **Security Lighting**

All staging areas shall be equipped with adequate temporary security lighting. The Contractor shall install and maintain the temporary lighting upon consulting with DDC. Additional lighting may be required at the discretion of DDC.

#### **Construction Traffic**

All construction traffic shall use the stabilized construction gate located in visitor parking lot, northeast of the Clarke Avenue entrance. However, because of the site's small staging area, all arrivals shall be coordinated. Minimize

parking and disruptions on campus grounds. To determine the best possible route and delivery time for heavy machinery or tractor trailer deliveries, notify the DDC CPM in advance.

### **Restrooms**

Contractors are responsible for providing portable restrooms for their employees. Restrooms within campus buildings will not be available to contractors. Contractor is also responsible for providing portable restrooms for HRT staff and visitors for periods when building restrooms are temporarily not in service due to construction work.

### **Temporary Water & Electric Connections**

Please consult with the HRT Facilities regarding sources of domestic water and electric power at your construction site.

### **Site Mobilization/Phasing**

Contractor(s) is responsible for familiarizing themselves with drawing PH-001.00 in the bid set.

Due to space restrictions on site, DDC has developed an outline for mobilization/phasing. Please note the contractor is responsible for developing a comprehensive mobilization plan and phasing diagram for DDC approval.

Note: Phasing Plan sequence of work does not specify ancillary work necessary for installation and included in Construction Contract.

### **Phase 1 – Sewer/Electrical Work**

- o Phase 1A: Install private sanitary sewer system throughout campus with sanitary sewer connections to DEP sewers in Clarke Avenue and St. Patrick's Place.
- o Phase 1B: Trenching and installation of a new single metered Con Ed electrical service for the site. The new service includes a primary feed to a transformer located on site, powering to a new electric distribution system, located in the cellar of the Seaman's Cottage – Building #24. Install underground feeds throughout campus grounds, including Tyson Court and the west half of Center Street, to the required Historic Richmond Town Buildings
- o Phase 1C: Water Main/Data/Telephone/Electrical/Street Lighting trenching and installation to occur at Tyson Court and the west half of Center Street.
- o Phase 1D: Tyson Court and the west half of Center Street to be restored. Standard DOT granite curbs to be installed. Install new sidewalk and curb at designated locations in order to have continuous sidewalk along the length of each street. In addition, all existing sidewalks to be replaced using landmarks grey concrete tinted and scored as per the contract documents.
- o Phase 1E: Landscape Restoration

### **Phase 2 – Water Main/Data/Telephone**

- o Phase 2A: Trenching and installation of a new single metered Con Ed electrical service for the site. Install underground feeds throughout Court Place and the east half of Center Street to the required Historic Richmond Town Buildings
- o Phase 2B: Water Main/Data/Telephone/Electrical/Street Lighting trenching and installation to occur at Court Place and the east half of Center Street.
- o Phase 2C: Connect new electrical/data/telephone service and remove the existing overhead utility lines, transformers and poles.
- o Phase 2D: Court Place and the east half of Center Street to be restored. Standard DOT granite curbs to be installed. Install new sidewalk and curb at designated locations in order to have continuous sidewalk along the length of each street. In addition, all existing sidewalks to be replaced using landmarks grey concrete tinted and scored as per the contract documents.
- o Phase 2E: Landscape Restoration
- o Phase 2F: Final granite chip overlay paving would only be applied after all work under and on the surface was completed and the final asphalt top course was installed.

### **Phase 3 – Project Closeout**

Punch-list and project close-out



**VIII. SPECIAL EXPERIENCE REQUIREMENTS FOR THE PROJECT**

NOT USED

## IX. REVISIONS: SPECIFICATIONS AND CONTRACT DRAWINGS

The Specifications and the Contract Drawings for the Project are revised in accordance with the provisions set forth below.

- (1) Owner: Wherever the term "Owner" is used in the Specifications and/or the Contract Drawings, such term shall mean the City of New York.
- (2) Other Entities: In the event any entity other than the City of New York is referred to or named as the "Owner" in the Specifications and/or the Contract Drawings, the name of such other entity is deemed deleted and replaced with the "City of New York".
- (3) Architect / Engineer: Wherever the words "Architect", "Engineer", "Architect / Engineer" or "Architect and/or Engineer" are used in the Specifications and/or the Contract Drawings, such words are deemed deleted and replaced with the word "Commissioner".
- (4) Products / Manufacturers: Wherever the Specifications and/or the Contract Drawings require the contractor to provide a particular product (i.e., material and/or equipment) from a designated manufacturer and/or vendor, the term "or approved equal" is deemed inserted, even if only one product and/or manufacturer is specified, except as otherwise provided below.
  - (a) Proprietary Items: If the Bid Booklet contains a Notice which identifies a particular product from a designated manufacturer as a "Proprietary Item", the Contractor shall be required to provide such specified product. In such case, no substitution or "approved equal" will be permitted.
- (5) Special Experience Requirements: Special Experience Requirements for the Project, if any, are set forth in the Bid Booklet. Special Experience Requirements may apply to contractors, subcontractors, installers, manufacturers and/or suppliers. If the Specifications and/or the Contract Drawings contain any Special Experience Requirement that is not set forth in the Bid Booklet, such Special Experience Requirement is deemed deleted, except as otherwise provided below.
  - (a) Any Special Experience Requirement that provides that the entity performing the work or supplying the material must have more than three (3) years of experience, is revised to provide that the entity performing the work or supplying the material must have three (3) years of experience, except as described in paragraph (b) below.
  - (b) Any Special Experience Requirement that pertains to the abatement of hazardous materials shall not be subject to the deletion and/or revision set forth above. Such Special Experience Requirement shall remain in full force and effect.
  - (c) Any Special Experience Requirement that provides that the entity performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such entity must be properly trained for the specified work.
  - (d) Any Special Experience Requirement that provides that the individual workers performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such individual workers must be properly trained for the specified work.
- (6) Alternate Bids: If the agency is requesting the submission of Alternate Bids, a Notice regarding such Alternate Bids is set forth in the Bid Booklet. In the event of any conflict or inconsistency between (1) the Notice regarding Alternate Bids set forth in the Bid Booklet and (2) a provision in the Specifications and/or the Contract Drawings regarding Alternate Bids, the Notice set forth in the Bid Booklet shall prevail. If the agency is not requesting the submission of Alternate Bids, as indicated by the absence of a Notice in the Bid Booklet, and the Specifications and/or the Contract Drawings contain any provision regarding Alternate Bids, such provision is deemed deleted.
- (7) Contractor Retained Engineer: If the Specifications and/or the Contract Drawings require the Contractor to retain an Engineer to provide engineering services for the Project, the following sentence is deemed inserted: "Such Engineer must be a Professional Engineer, licensed in the State of New York."

- (8) **LEED Related Provisions:** If the Specifications and/or the Contract Drawings require the Contractor to purchase FSC certified wood, rapidly renewable materials, or materials within 500 miles, such provisions are deemed deleted and replaced with the requirement that if the contractor has purchased FSC certified wood, rapidly renewable materials, or materials within 500 miles, the contractor shall submit such forms or documentation as may be required by the City in order for the USGBC to certify that the Project qualifies for the related LEED credit(s).
- (9) **Guarantees:** Requirements for Guarantees and Maintenance are set forth in Schedule B, which is included in the Addendum to the General Conditions. In the event of any conflict or inconsistency between (1) a guarantee and/or maintenance requirement set forth in the Specifications and/or the Contract Drawings and (2) a guarantee and/or maintenance requirement set forth in Schedule B, the guarantee and/or maintenance requirement set forth in Schedule B shall prevail.
- (10) **Warranties:** Requirements for Warranties are set forth in Schedule B, which is included in the Addendum to the General Conditions.
- (a) In the event of any conflict or inconsistency between (1) a warranty requirement set forth in the Specifications and/or the Contract Drawings and (2) a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall prevail.
- (b) In the event a warranty requirement set forth in the Specifications and/or the Contract Drawings is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications and/or the Contract Drawings, shall remain in full force and effect.
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from Schedule B, as well as from the Specifications or the Contract Drawings, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (11) **Exculpatory Provisions:** In the event the Specifications and/or the Contract Drawings contain any provision whereby the consultant and/or any of its officers, employees or agents, including subconsultants, is absolved of responsibility for any act or omission, such provision is deemed deleted.
- (12) **Insurance:** Provisions regarding insurance coverage the Contractor is required to provide are set forth in Article 22 of the City of New York Standard Construction Contract and Schedule A, which is included in the Addendum to the General Conditions. In the event the Specifications and/or the Contract Drawings contain any provision regarding insurance requirements, such provision is deemed deleted.
- (13) **Indemnification:** Provisions regarding indemnification are set forth in Articles 7, 12, 22 and 57 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding indemnification, such provision is deemed deleted.
- (14) **Dispute Resolution:** Provisions regarding dispute resolution are set forth in Article 27 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding dispute resolution, such provision is deemed deleted.
- (15) **Payment to Other Entities:** In the event the Specifications and/or the Contract Drawings contain any provision which requires the Contractor to make payments to an entity other than a subcontractor and/or supplier providing services and/or material for the project, such provision is deemed deleted.
- (16) **General Conditions:** In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the General Conditions, the General Conditions shall prevail.
- (17) **Standard Construction Contract:** In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the City of New York Standard Construction Contract, the City of New York Standard Construction Contract shall prevail.

**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**  
**Contract Requirements**

Various Articles of the Contract refer to requirements which are set forth in Schedule A of the General Conditions. The Schedule set forth below specifies the following: (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to each separate contract.

<b>REFERENCE</b>	<b>ITEM</b>	<b>REQUIREMENTS</b>	<b>CONTRACT #1</b>
Information For Bidders	Bid Security		See Attachment 1 – Bid Information in the Bid Booklet
Information For Bidders	Performance and Payment Bonds		See Attachment 1- Bid Information in the Bid Booklet
Article 14 Contract	Time of Completion	Consecutive Calendar Days	720 ccds
Article 15 Contract	Liquidated Damages	For each consecutive calendar day over completion time	\$600
Article 17 Contract	Sub-Contracts	Not to exceed Percent of Contract Price	60%
Article 21 Contract	Retainage	Percent of Voucher	If 100% bonds are required 5% If 100% bonds are not required, and Contract Price is less than \$1,000,000 10% If 100% bonds are not required, and Contract Price is more than \$1,000,000 10%
Article 24 Contract	Deposit Guarantee	Percent of Contract Price	1%
Article 24 Contract	Period of Guarantee		See Schedule B of the Addendum to the General Conditions
Article 74 Contract	Statement of Work		See Contract Article 74
Article 75 Contract	Compensation to be Paid to Contractor		See Contract Article 75
Article 78 Contract	MWBE Program		See MWBE Utilization Plan in the Bid Booklet

**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**

**Relating to Article 22 - Insurance**

**PART II. Types of Insurance, Minimum Limits and Special Conditions**

**Note:** All certificate(s) of insurance submitted pursuant to Contract Article 22.3. 3 must be accompanied by a Certification by Broker consistent with Part III below and include the following information:

- For each insurance policy, the name and NAIC number of issuing company, number of policy, and effective dates;
- Policy limits consistent with the requirements listed below;
- Additional insureds or loss payees consistent with the requirements listed below; and
- The number assigned to the Contract by the City (in the "Description of Operations" field).

Insurance indicated by a blackened box (■) or by (X) in the  to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<p>■ Commercial General Liability      Art. 22.1.1</p>	<p>The minimum limits shall be \$1,000,000.00 per occurrence and \$2,000,000.00 per project aggregate applicable to this <b>Contract</b>.</p> <p>Additional Insureds:</p> <p>1. City of New York, including its officials and employees, with coverage at least as broad as ISO Forms CG 20 10 and CG 20 37, and</p> <p>2. All person(s) or organization(s), if any, that Article 22.1.1(b) of the <b>Contract</b> requires to be named as Additional Insured(s), with coverage at least as broad as ISO Form CG 20 26. The Additional Insured endorsement shall either specify the entity's name, if known, or the entity's title (e.g., Project Manager).</p> <p>3. Staten Island Historical Society</p>
<p>■ Workers' Compensation              Art. 22.1.2</p> <p>■ Disability Benefits Insurance        Art. 22.1.2</p> <p>■ Employers' Liability                    Art. 22.1.2</p> <p><input type="checkbox"/> Jones Act                                    Art. 22.1.3</p> <p><input type="checkbox"/> U.S. Longshoremen's and Harbor Workers Compensation Act              Art. 22.1.3</p>	<p>Workers' Compensation, Employers' Liability, and Disability Benefits Insurance: Statutory per New York State law without regard to jurisdiction.</p> <p><b>Note:</b> The following forms are acceptable: (1) New York State Workers' Compensation Board Form No. C-105.2, (2) State Insurance Fund Form No. U-26.3, (3) New York State Workers' Compensation Board Form No. DB-120.1 and (3) Request for WC/DB Exemption Form No. CE-200. The City will not accept an ACORD form as proof of Workers' Compensation or Disability Insurance.</p> <p>Jones Act and U.S. Longshoremen's and Harbor Workers' Compensation Act: Statutory per U.S. law.</p>



**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**

**Relating to Article 22 - Insurance**

**PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)**

Insurance indicated by a blackened box (■) or by (X) in the  to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<input type="checkbox"/> Hull and Machinery Insurance      Art. 22.1.7(b)	\$ _____ per occurrence  \$ _____ aggregate  Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Pollution Liability      Art. 22.1.7(c)	\$ _____ each occurrence  Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER]      Art. 22.1.8  <input type="checkbox"/> Ship Repairers Legal Liability	\$ _____ each occurrence [Contracting agency to fill in total value of City vessels involved]
[OTHER]      Art. 22.1.8  <input type="checkbox"/> Collision Liability/Towers Liability	\$ _____ per occurrence  \$ _____ aggregate  Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER]      Art. 22.1.8  <input type="checkbox"/> Railroad Protective Liability	\$ _____ per occurrence  \$ _____ aggregate  Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____

**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**

**Relating to Article 22 - Insurance**

**PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)**

Insurance indicated by a blackened box (■) or by (X) in the  to left will be required under this contract.

<p>[OTHER] <span style="float: right;">Art. 22.1.8</span></p> <p><input type="checkbox"/> Asbestos Liability _____</p>	<p>Only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>\$1,000,000 each occurrence, \$2,000,000 aggregate (Combined Single Limit); only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____</p>
<p>[OTHER] <span style="float: right;">Art. 22.1.8</span></p> <p><input type="checkbox"/> Boiler Insurance _____</p>	<p>\$200,000</p>
<p>[OTHER] <span style="float: right;">Art. 22.1.8</span></p> <p>■ Professional Liability</p> <p>In the event any section of the Specifications requires the Contractor to engage a Professional Engineer to provide design and/or engineering services, the Engineer engaged by the Contractor, as well as any sub consultant(s) performing professional services, shall provide Professional Liability Insurance.</p>	<p>\$1,000,000 per occurrence</p> <p>The Contractor's Professional Engineer shall maintain and submit evidence of Professional Liability Insurance in the minimum amount of \$1,000,000 per claim. The policy or policies shall include an endorsement to cover the liability assumed by the Contractor under this Agreement arising out of the negligent performance of professional services or caused by an error, omission or negligent act of the Contractor's Professional Engineer or anyone employed by the Contractor's Professional Engineer.</p> <p>Claims-made policies will be accepted for Professional Liability Insurance. All such policies shall have an extended reporting period option or automatic coverage of not less than two (2) years. If available as an option, the Contractor's Professional Engineer shall purchase extended reporting period coverage effective on cancellation or termination of such insurance unless a new policy is secured with a retroactive date, including at least the last policy year.</p>



**STANDARD HIGHWAY SPECIFICATIONS**  
**SECTION 6.40**  
**LIQUIDATED DAMAGES FOR**  
**ENGINEER'S FIELD OFFICE**

If the Contractor fails to satisfactorily provide the field office and all equipment specified in **Section 6.40 – Engineer's Field Office**, and/ or if a cited deficiency exceed seventy two (72) hours after notice from the Engineer in writing, or is permitted to recur, liquidated damages will be assessed in the amount specified herein for each subsequent calendar day or part thereof that a cited deficiency resulting in nonpayment, as described in Section 6.40.5, is not corrected.

For Each Calendar Day of Deficiency: \$150.00

**STANDARD HIGHWAY SPECIFICATIONS**  
**SECTION 6.70**  
**LIQUIDATED DAMAGES FOR**  
**MAINTENANCE AND PROTECTION OF TRAFFIC**

For each instance of failure to comply with the Maintenance and Protection of Traffic requirements within three (3) hours after written notice from the Engineer: \$250.00

For each and every hour of failing to open the entire width of roadway to traffic the morning following a night/ weekend work operation: \$500.00

**STANDARD HIGHWAY SPECIFICATIONS**  
**SECTION 7.13**  
**LIQUIDATED DAMAGES FOR**  
**MAINTENANCE SITE**

If the Contractor fails to comply, within three (3) consecutive hours after written notice from the Engineer, with the requirements of **Section 7.13 – Maintenance of Site**, the Contractor shall pay to the City of New York, until such notice has been complied with or rescinded, the sum specified above per calendar day, for each instance of such failure, as liquidated damages and not as a penalty, for such default.

For Each Calendar Day, for Each Occurrence: \$250.00

**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**

**Relating to Article 22 - Insurance**

**PART II. Broker's Certification**

[Pursuant to Article 22.3.1(a) of the Contract, every Certificate of Insurance must be accompanied by either the following certification by the broker setting forth the following text and required information and signatures or complete copies of all policies referenced in the Certificate of Insurance. In the absence of completed policies, binders are acceptable.]

**CERTIFICATION BY BROKER**

The undersigned insurance broker represents to the City of New York that the attached Certificate of Insurance is accurate in all material respects, and that the described insurance is effective as of the date of this Certification.

\_\_\_\_\_  
[Name of broker (typewritten)]

\_\_\_\_\_  
[Address of broker (typewritten)]

\_\_\_\_\_  
[Signature of authorized official or broker]

\_\_\_\_\_  
[Name and title of authorized official (typewritten)]

Sworn to before me this  
\_\_\_\_ day of \_\_\_\_\_, 20\_\_

\_\_\_\_\_  
NOTARY PUBLIC

**SCHEDULE A (FOR PUBLICLY BID PROJECTS)**

**Relating to Article 22 - Insurance**

**PART III. Address of Commissioner**

Wherever reference is made in Article 7 or Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth below or, in the absence of such address, to the **Commissioner's** address as provided elsewhere in this **Contract**.

ACCO's Office, Insurance Unit

---

30-30 Thomson Avenue, 4<sup>th</sup> Floor

---

Long Island City, New York 11101

---

**SCHEDULE B**

**Guarantees and Warranties**

(Reference: Section 01 7839, Article 2.7 of the DDC Standard General Conditions)

**GUARANTY FROM CONTRACTOR**

(1) **Contractor's Guaranty Obligation:** The Contractor shall promptly repair, replace, restore or rebuild, as the Commissioner may determine, any finished Work in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of Substantial Completion (or use and occupancy in accordance with the Contract), except for the areas of Work set forth below:

- Roofing, Waterproofing, and Joint Sealant Work. For these types of work, the guarantee period shall be (2) two years.
- Trees and/or Plant Material. For trees and/or plant material furnished and installed, the guarantee period shall be (2) two years. During the guarantee period, the Contractor shall provide all maintenance services set forth in the Specifications.

(2) **Guaranty Period:** The obligation of the Contractor, and its Surety under the Performance Bond, is limited to the period(s) of time specified above.

(3) **Other Provisions Deemed Deleted:** In the event the Specifications and/or the Contract Drawings contain any provisions regarding guaranty requirements, such provisions are deemed deleted and replaced with the guaranty requirements set forth in this Schedule B.

\*\*\*\*\*

**WARRANTY FROM MANUFACTURER**

(1) **Contractor's Obligation to Provide Warranties:** The items of material and/or equipment for which manufacturer warranties are required are listed below. For each item of material and/or equipment listed below, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth below and will be replaced or repaired within such specified period. The Contractor shall deliver all required warranties to the Commissioner.

(2) **Required Warranties:**

Specification Number	Material or Equipment	Warranty Period
E-260010	Sub-Metering Equipment	10 Years
E-260010	Transformers	1 Years minimum
E-260010	Surge Protection Devices	10 Years
E-260010	Panel Boards	1 Years minimum
E-260010	Disconnect Switches	1 Years minimum
E-260010	Fire Alarm System Equipment	2 Years minimum
56.00 (Item 56.40)	Sump Pump	1 Year minimum

(3) **Application:** The obligations under the warranty for the periods specified above shall apply only to the manufacturer of the material or equipment, and not to the Contractor or its Surety; provided, however, the Contractor retains responsibility for obtaining all required warranties from the manufacturers and delivering the same to the Commissioner.

(4) **Other Provisions:** The warranty requirements set forth in this Schedule B are also included in the

Specifications.

- (a) In the event of any conflict between a warranty requirement set forth in the Specifications and a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall take precedence.
- (b) In the event a warranty requirement set forth in the Specifications is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications, shall remain in full force and effect
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from both Schedule B and the Specifications, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (d) In the event a warranty requirement is provided for a particular item of material or equipment, and such requirement specifies a warranty period that is longer than that which is actually provided by any of the specified manufacturers, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by any of the specified manufacturers, unless otherwise directed in writing by the Commissioner.
- (e) Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.

## SCHEDULE C

### Contract Drawings

(Reference: Section 01 1000, Article 1.5 (A) of the DDC Standard General Conditions)

The Schedule set forth below lists all Contract Drawings for the Project.

T-001.00	TITLE SHEET
G-001.00	ABBREVIATIONS, SYMBOLS
G-002.00	GENERAL NOTES – 1
G-003.00	GENERAL NOTES – 2
SV-001.00	EXISTING CONDITIONS
C-001.00	REMOVALS PLAN – 1
C-002.00	LAYOUT PLAN – 1
C-003.00	PAVEMENT SECTIONS
C-004.00	ROADWAY SECTIONS – 1 CENTER ST.
C-005.00	ROADWAY SECTIONS – 2 CENTER ST.
C-006.00	ROADWAY SECTIONS – 3 TYSEN CT.
C-007.00	ROADWAY SECTIONS – 4 COURT PL.
C-008.00	ROADWAY PROFILES – 1
C-009.00	ROADWAY PROFILES – 2
C-010.00	ROADWAY PROFILES – 3
C-011.00	GROUND RESTORATION PLAN
C-012.00	GROUND RESTORATION DETAILS
U-001.00	SEWER PLAN
U-002.00	WATER MAIN PLAN
U-003.00	COMPOSITE UTILITY PLAN
U-004.00	UTILITY ENLARGEMENT PLAN
U-005.00	UTILITY SECTIONS
U-006.00	UTILITY DETAILS – 1
U-007.00	UTILITY DETAILS – 2
U-008.00	GUYON/TAVERN BLDG. #7 UTILITY PART PLANS
U-009.00	MUSEUM BLDG. #23 SEWAGE PIPING PARTS PLANS
E-001.00	ELECTRICAL LEGEND, ABBREVIATIONS, AND NOTES
E-101.00	ELECTRICAL DEMOLITION SITE PLAN
E-102.00	ELECTRICAL POWER SITE PLAN
E-103.00	LIGHTING/FIRE ALARM SITE PLAN
E-104.00	COMMUNICATIONS SITE PLAN
E-401.00	ELECTRICAL ENLARGEMENT PLANS – 1
E-402.00	ELECTRICAL ENLARGEMENT PLANS – 2
E-403.00	ELECTRICAL ENLARGEMENT PLANS – 3
E-404.00	ELECTRICAL ENLARGEMENT PLANS – 4
E-405.00	ELECTRICAL DEMOLITION/NEW POWER – ENLARGEMENT PLAN
E-406.00	COTTAGE – BLDG. #24
E-501.00	ELECTRICAL DETAILS
E-601.00	ELECTRICAL ONE-LINE DIAGRAM
E-602.00	TELEPHONE RISER DIAGRAM AND LUMINAIR/ELEC. EQUIP. SCHEDULE
E-701.00	ELECTRICAL PANEL SCHEDULES – 1
E-702.00	ELECTRICAL PANEL SCHEDULES – 2
P-001.00	PHOTOMETRIC ANALYSIS PLAN
F-101.00	FDNY PLAN AND DETAILS – 1
F-102.00	FDNY PLAN AND DETAILS – 2
B-101.00	RECORD OF BORINGS
A-001.00	ARCHEOLOGICAL TESTING
PH-001.00	PHASING PLAN

**SCHEDULE D**

**Electrical Motor Control Equipment**

**(Reference: 01 3506, Article 3.8 of the DDC Standard General Conditions)**

Requirements for electrical motor equipment may be included in one or more sections of the Specifications for the Contract for the Project. Schedule D set forth below delineates specific information for electrical motor control equipment. In the event of any conflict between the Specifications and this Schedule D, Schedule D shall take precedence; provided, however, in the event of an omission from Schedule D (i.e., Schedule D omits either a reference to or information concerning electrical motor equipment which is set forth in the Specifications), such omission from Schedule D shall have no effect and the Contractor's obligation with respect to the electrical motor control equipment, as set forth in the Specifications, shall remain in full force and effect.

---

<b>DB</b> Disconnect Circuit Breaker (Switch)	<b>P</b> Pilot Light	<b>BG</b> Break Glass Station
<b>TS</b> Thermal Switch	<b>F</b> Firestat	<b>HOA</b> Hand-Off Auto.
<b>MS</b> Magnetic Starter	<b>T</b> Thermostat	<b>PB</b> Push Button Station
<b>CMS</b> Comb. Mag. Starter	<b>AL</b> Alternator	<b>RO</b> Remote "off"

Equip. Ident.	Location	# of Units	HP or KW	Volts and Phase	Control Type: See legend above	Remarks:
Space heater	Seaman's Cottage	1	1/20	208/1	<b>T</b>	
Exhaust Fan	Seaman's Cottage	1	1/10	115/1	<b>T</b>	
Sump Pump	Guyon Store/ Tavern	2	1/2	208/3	<b>HOA</b>	Integral Float Switch

**SCHEDULE E**

**Separation of Trades**

**NOT USED FOR SINGLE CONTRACTS**











THIS PAGE INTENTIONALLY LEFT BLANK

**CONTRACT # 1**  
**GENERAL CONSTRUCTION WORK**

**THIS PAGE INTENTIONALLY LEFT BLANK**

ATTACH TO CONTRACT DOCUMENTS

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID. PVC 341-M

HISTORIC RICHMOND TOWN  
MUSEUM UTILITY UPGRADES IN CENTER STREET, TYSEN COURT AND COURT PLACE

Together With All Work Incidental Thereto

BOROUGH OF STATEN ISLAND  
CITY OF NEW YORK

ADDENDUM NO. 1

DATED: May 19, 2014

THIS ADDENDUM IS HEREBY MADE A PART OF THE CONTRACT DOCUMENTS

The New York City Department of Transportation Standard Highway Specifications, dated November 1, 2010, (which include, but are not limited to, "General Conditions", "Basic Materials of Construction", "Combined Materials of Construction", "Construction Methods", "Inspection and Testing of Materials, Adjustments for Deficiencies, and Maintenance", and "Supplemental Construction Methods"), as modified by addenda issued prior to the opening of bids, shall apply to and become a part of the contract.

All references contained herein are to the New York City Department of Transportation, Standard Highway Specifications, dated November 1, 2010. The said Specifications are hereby revised. Included hereunder are the following REVISIONS:

1. Amendments to Standard Highway Specifications, Volume I
2. Amendments to Standard Highway Specifications, Volume II, including Section 7.88 (Revised)
3. New Sections
4. Special Provisions



1. AMENDMENTS TO STANDARD HIGHWAY SPECIFICATIONS, VOLUME I

The following amendments to the Contract Requirements shall become a part of and apply to the contract:

[Added 12-09-2010]

1. Refer to Page 15, Subsection 1.06.23.(C) CONFORMANCE WITH FEDERAL, STATE AND CITY AGENCIES;

Add the following new paragraphs:

"The Contractor is notified that all vehicles that are owned, leased or operated by the Contractor or its subcontractors and used in connection with the Project shall comply with the following requirement:

Every truck, tractor, and tractor-trailer or semitrailer combination, having a gross vehicle weight rating of twenty-six thousand pounds or more, and a conventional cab configuration in which more than half of the engine length is forward of the foremost point of the windshield base, and the steering wheel hub is in the forward quarter of the vehicle length shall be equipped with a convex mirror on the front of such vehicle or combination of vehicles. Such convex mirror shall be adjusted so as to enable the operator of such vehicle or combination of vehicles to see all points on an imaginary horizontal line which is three feet above the road, is one foot directly forward from the midpoint of the front of such vehicle or combination of vehicles, and extends the full width of the front of such vehicle or combination of vehicles.

Any vehicle that does not comply with this provision may be prohibited from entering the Project site and/or supplying equipment or materials to the Project. The Contractor shall not be entitled to any damages as a result of such prohibition."

[Added 01-09-2011]

2. Refer to Page 240, Subsection 4.16.5.(B) STUMP REMOVAL;  
Delete Subsection 4.16.5.(B) STUMP REMOVAL, in its entirety;  
Substitute the following revised Subsection 4.16.5.(B):

"(B) STUMP REMOVAL

1. Tree stumps designated to be removed and their roots shall be completely excavated to a minimum depth of three (3) feet below the existing grade. A portable stump cutter may be required in some locations. It may be necessary to remove concrete, asphalt, pavers, and/or other types of material surrounding the base of the stump. All excess debris, including chips from tree stumps, shall be removed and disposed of by the Contractor, away from the site prior to backfilling and the area shall be restored by completion of the workday, to the satisfaction of the Engineer. The disposal of tree stumps by burning in open fires will not be permitted.

2. All voids and excavations left after the removal of the stump and roots shall be backfilled to grade with clean earth fill. Fill shall be placed and compacted to a minimum of 95 percent of Standard Proctor Maximum Density by acceptable methods to the satisfaction of the Engineer. Where paving blocks exist, they are to be reset to the existing grade as directed.

3. Maximum safety and care must be used by Contractor during stump removal. The Contractor shall carefully protect against damage all existing trees, plants, curbs, sidewalks and utilities and other features to remain. The Contractor is responsible for locating and protecting underground utilities from damage during stump removal procedures. During stump grinding operations, plywood must be used to protect adjacent vehicles, real property, and pedestrians. If, when removing stumps, existing sidewalks or curbs are disturbed, the Contractor shall restore and/or reset these sidewalks and curbs, at no additional cost to the City. Restoration work shall be done to match the existing, to the satisfaction of the Engineer. All damaged trees, curbs, sidewalks, real property, vehicles and utilities must be addressed within three (3) days."

[Added 04-18-2011]

3. Refer to Pages 218 and 219, Subsection 4.13.4. (H) PIGMENT;  
Delete the first three (3) paragraphs on page 219;  
Substitute the following revised three (3) paragraphs:

"Where the color of the concrete is required to simulate the color of dark gray bluestone, the concrete shall be integrally pigmented to produce a gray color equivalent to: Davis Colors No. 884-3%; Lansco Color No. 437 "Strong Black" 5 lbs. per 94 lbs. Light Grey Portland Cement and 3 parts sand; L.M. Scofield "Cool Black No. 4"; Bayferrox Limestone 330, 2 lbs. per 94 lbs. Light Gray Portland Cement; or an approved equivalent, unless otherwise specified.

Where the color of the concrete is required to simulate the color of light to medium gray granite, the concrete shall be integrally pigmented to produce a gray color equal to: Davis Colors No. 884-1%; Lansco Color No. 437 "Strong Black" 2.5 lbs. per 94 lbs. Light Grey Portland Cement and 3 parts sand; L.M. Scofield "Cool Black No. 1"; Bayferrox Silver 330, 1 lb. per 94 lbs. Light Gray Portland Cement; or an approved equivalent, unless otherwise specified.

Where the sidewalk is designated to have a saw cut joint finish the color of the concrete shall be integrally pigmented to produce a gray color equivalent to L.M. Scofield "Landmarks Grey" K-157-4; L.M. Scofield "Cool Black No. 4"; Davis Colors No. 884-3%; Lansco Color No. 437 "Strong Black" 5 lbs. per 94 lbs. Light Grey Portland Cement and 3 parts sand; Bayferrox NYC Landmark Commission Gray, 3.5 lbs. per 94 lbs. Light Gray Portland Cement; or an approved equivalent, unless otherwise specified."

[Added 07-01-2011]

4. Refer to Page 14, Subsection 1.06.23. (A) PERMITS;  
Delete line (b) under the first paragraph;  
Substitute the following text:

"(b) Any planned work requiring a DOT Construction Permit that may potentially be within 100 feet of a bridge structure will be placed on a Bridge Hold. If any proposed work is within 100 feet of a bridge structure, permittees must submit a scaled drawing showing the work and exact location, along with the following:

- Plan layout of the project area.
- The scope of work.
- The contractor's means and methods.
- Indicate if work will be done of the bridge itself or its abutments, and the type of work.

If the work is more than 100 feet away from the bridge structure, permittees may send a certification by e-mail stating so. Either response must be sent to the Division of Bridges at [bridgeshold@dot.nyc.gov](mailto:bridgeshold@dot.nyc.gov) for review and release prior to commencing work. Emergency work will not be placed on hold and shall proceed in accordance with the New York City Highway Rules, section 2-11 (g);

(c) Permits from the Department of Sanitation for use of City landfills;"

[Added 07-27-2011]

5. Refer to Page 37, Subsection 1.06.46. (A) 6. Sign Graphics;  
Delete article "a." beginning with the words "All visual components of the sign are in an Adobe \*.pdf file; . . ." and ending with the words ". . . DDC to the Contractor (on a CD or via E-mail) for printing.", in its entirety;  
Substitute the following revised article "a":

- "a. All visual components of the sign are in an Adobe \*.pdf file; which is provided by the Commissioner's representative. The file is not to be altered for composition, type font or image from the version provided by DDC. The Commissioner's representative shall provide a complete file with data and image. The digital file shall be provided by DDC to the Contractor (on a CD or via E-mail) for printing."

[Added 09-27-2012]

6. Refer to Page 36, Subsection 1.06.46. Project Sign;  
Delete the words "Unless otherwise specified in the Special Provisions of the contract, the following shall apply:";  
Substitute the following revised text:

"The Contractor is notified that he shall be required to furnish, install, maintain, and remove, when directed, Construction Project Information Signs (CPIS) as per Sec. 2-02(c)(4) and (5) of the NYC DOT Highway Rule and the cost shall be deemed included under all scheduled items of the contract. In addition, unless otherwise specified in the Special Provisions of the contract, the following Project Sign shall also apply:"

2. AMENDMENTS TO STANDARD HIGHWAY SPECIFICATIONS, VOLUME II

[Added 01-25-2012]

1. Refer to Pages 365 and 366, Subsection 6.40.2.(C)(c)(1) Personal Computer(s) - Workstation Configuration;

Delete the text under Subsections (a), (b), (c), (d), (h), (i), and (m), in their entirety;

Substitute the following revised text:

- |                             |  |
|-----------------------------|--|
| “(a) Make and Model:        | Dell; HP; Gateway; Acer; or, an approved equivalent. (Note: an approved equivalent requires written approval of the Assistant Commissioner of ITS.)  |
| (b) Processor:              | I5-2400 (6MB Cache, 3.1GHz) or faster computer - Single Processor.   |
| (c) System Ram:             | Minimum of 4GB (Gigabytes) Dual Channel DDR3 SDRAM at 1333MHz – 2 DIMMSs   |
| (d) Hard Disk Drive(s):     | 500 GB (Gigabytes) Serial ATA (7200RPM) w/DataBurst Cache, or larger.”   |
| “(h) Video Display Card:    | HD Graphics (VGA, HDMI) with a minimum of 64 MB of RAM,  |
| (i) Monitor:                | 22" W, 23.0 Inch VIS, Widescreen, VGA/DVI LCD Monitor.”  |
| “(m) Software Requirements: | Microsoft Windows 7 Professional SP1, 64 bit; Microsoft Office Professional 2010; Microsoft Project 2010; Adobe Acrobat reader; Anti-Virus software package with 2 year updates subscription; and, either Auto Cad 2012 LT or Microsoft Visio 2010 Standard Edition, as directed by the Engineer.” |

~~2. Refer to Page 366, Subsection 6.40.2.(C)(c)(2)(b);  
Delete the text under Subsection (b), which begins with the words  
“(b) One (1) 600 DPI HP Laser Jet . . .”, in its entirety;  
Substitute the following revised text:~~

~~“(b) One (1) 600 DPI HP Color Laser Jet all-in-one Printer/Scanner/Copier/Fax (twelve (12) pages per minute or faster) with one (1) Extra Paper Tray (Legal Size) networked to all office computers.”~~

3. Refer to Page 367, Subsection 6.40.3. SPECIFIC REQUIREMENTS FOR ENGINEERS FIELD OFFICE (TYPE A, B, C, CU, D OR DU), first paragraph;  
Delete the text in the first paragraph of Subsection 6.40.3., in its entirety;  
Substitute the following revised text:

**6.40.3. SPECIFIC REQUIREMENTS FOR ENGINEER'S FIELD OFFICE (TYPE A, B, C, CU, D, OR DU).** In addition to the general requirements, each type of Field Office shall have the minimum floor area indicated in Table 6.40-I calculated based on usable area only, excluding any loss factors. Loss factors are defined as those areas such as lobby, sidewalk window ledge, elevator shafts and stairways. The Contractor shall provide and maintain furnishings for each type of Field Office in the quantity specified in Table 6.40-I. The furnishings shall be new or used equipment satisfactory to the Engineer:

4. Refer to Page 368, TABLE 6.40-I, ADDITIONAL REQUIREMENTS SPECIFIC REQUIREMENTS;  
Delete the requirements for a Photocopy Machine shown in the 15th row of TABLE 6.40-I, in its entirety;  
Substitute the following revised requirements:

Photocopying Machine – Stand-alone, heavy duty, electric, dry-process color photocopying type with a minimum production rate of 70 pages per minute and an adequate supply of copy paper, toner, etc. The machine shall be capable of duplex copying paper sizes of 8-1/2 x 11 inches, 8-1/2 x 14 inches and 11 x 17 inches, and have separate trays for each paper size. It shall have a document feeder, collator, stapler, and the capability to reduce/enlarge copies between each paper size. The supply of each size copy paper, toner, etc. shall be replenished and the machines shall be maintained for the duration of the contract by the Contractor as required by the Engineer. Make and model can be Minolta, Canon, IBM, Epson, or an approved equivalent, and shall be networked to the office computers.	1	1	1	1	1	1
---	---	---	---	---	---	---

5. Refer to Page 368, TABLE 6.40-I, ADDITIONAL REQUIREMENTS SPECIFIC REQUIREMENTS;  
Insert the following two additional requirements:

Heavy duty commercial grade diamond cut shredder with automatic start. The shredder shall be able to receive 8-1/2 inch wide paper and shred a minimum of 15 sheets simultaneously along with CDs and staples.	1	1	1	1	1	1
Projector – 1080p LCD with a min. of 2200 ANSI Lumens, 1920 x 1080, 16:9, 40,000:1 contrast ratio, HDMI, VGA, USB, and a 10 feet diagonal, 16:9 Projection Screen.	-	-	1	1	1	1

6. Refer to Page 496, Subsection 7.20.4. METHODS, last paragraph beginning with the words "When directed by the Engineer, due to the original conditions . . .";  
Add the following sentence to the end of the last paragraph under Subsection 7.20.4:

"However, if the owner at his own expense supplies the replacement frame and doors or hatch covers the Contractor shall install the replacement frame and doors or hatch covers under this Item 7.20, as a basement access reset, in lieu of the steel safety closure plate."

[Added 07-16-2012]

7. Refer to Page 365, Subsection 6.40.2.(C)(c)(1) "Personal Computer(s) - Workstation Configuration";  
Delete the text under Subsections (g) and (k), in their entirety;  
Substitute the following revised text:

"(g) I/O Ports: Must have at least one (1) Serial Port, one (1) Parallel Port, and three (3) USB Ports.

(k) Network Interface: Integrated 10/100/1000 Ethernet card."

8. Refer to Page 366, Subsection 6.40.2.(C)(c)(2) "All field offices requiring computers shall be provided with the following:";  
Delete the text under Subsection (a), in its entirety;  
Substitute the following revised text:

"(a) One (1) broad-band internet service account. Wideband Internet connectivity at a minimum throughput of 15 Mbps download and 5 Mbps upload is required at each field office location with 1-5 staffers. For larger field offices see table below for minimum required upload speeds. Telephone service should be bundled together with Internet connectivity. Because of throughput requirements Verizon FIOS is the preferred connectivity provider where available.

Office Personnel #	Upload Speeds (Minimum)
1 - 5	5 Mbps
6 - 10	10 Mbps
11 - 15	15 Mbps
16 - 20 ...	20 Mbps

This account will be active for the life of the project. The e-mail name for the account shall be the DDC Field Office/project Id (e.g. FLD K HWK666 McGuinness@earthlink.com)."

[Added 08-09-2012]

9. Refer to Page 366, Subsection 6.40.2.(C) (c) (2) (b), as amended by Article 2 on page A1-2 of this Addendum;  
Delete the text under Subsection (b), in its entirety;  
Substitute the following words: "(b) (No Text)."

10. Refer to Page 368, TABLE 6.40-I, ADDITIONAL REQUIREMENTS SPECIFIC REQUIREMENTS;  
Delete the requirements for a Photocopy Machine shown in the 15th row of TABLE 6.40-I, as modified by Article 4 on page A1-2a of this Addendum, in its entirety;  
Substitute the following revised requirements:

Photocopying Machine – Stand-alone, heavy duty, electric, dry-process color photocopying type with color scan and send capability via e-mail, a minimum production rate of 70 pages per minute and an adequate supply of copy paper, toner, etc. The machine shall be capable of duplex copying paper sizes of 8-1/2 x 11 inches, 8-1/2 x 14 inches and 11 x 17 inches, and have separate trays for each paper size. It shall have a document feeder, collator, stapler, and the capability to reduce/enlarge copies between each paper size. The supply of each size copy paper, toner, etc. shall be replenished and the machines shall be maintained for the duration of the contract by the Contractor as required by the Engineer. Make and model can be Minolta, Canon, IBM, Epson, or an approved equivalent, and shall be networked to the office computers.	1	1	1	1	1	1
--	---	---	---	---	---	---

[Added 11-26-2012]

11. Refer to Pages 504 through 508, SECTION 7.88 - Rodent and Waterbug Pest Control;  
Delete Section 7.88, in its entirety;  
Substitute SECTION 7.88 (Revised), as contained on the following pages A1-2d through A1-2i.

[Added 02-08-2013]

12. Refer to Page 394, Subsection 6.52.3. METHODS;  
Insert the following new sentence to the end of the third paragraph:

"However, on Federally Funded Projects all uniformed full-time flagpersons paid under this item, irrespective of where they are used in Examples #1 and #2, shall be deemed to be Laborers and shall not be paid less than the highest minimum hourly rate as set forth by Federal, State or City laws."

**SECTION 7.88 (Revised)**  
**Rodent and Waterbug Pest Control**

**7.88.1. DESCRIPTION.** The Contractor shall provide all labor, materials, plant and equipment, and incidentals required to survey and monitor rodent activity and control any infestation or outbreak of rodents and waterbugs (American cockroaches) within the project limit.

**7.88.2. MATERIALS.** All materials shall be approved by the New York State Department of Environmental Conservation and comply with the New York City Health Code for the intended usage.

Rodenticide weatherproof bait blocks shall be multiple dose anticoagulants such as Chlorophacinone or Diphacinone, or single feed rodenticides such as ContraMeal, ContractBait block, Quintox pellets or TalonG pellets, or an approved equivalent.

Tamper proof bait station boxes shall be designed to exclude other mammals and shall be used with poisoned bait to attract rats. Information on "tamper proof bait station boxes" is available from the NYC Bureau of Regulatory & Environmental Health Services, Pest Control Office (718-956-7103/4).

Live traps shall be of proper dimensions for trapping rats and shall not be used with poisoned bait.

Insecticide bait shall be a residual type such as phenol methyl carbamate (2%) bait or an approved equivalent.

**(A) SUBMITTALS**

Prior to commencement of construction activities the Contractor shall submit to the Engineer manufacturer's installation instructions for all materials required for rodent and waterbug pest control work and product data which shall include illustrations, catalog data, product characteristics, typical use, performance, and limitation criteria of all rodent and waterbug pest control materials required.

**7.88.3. PERSONNEL.** The Contractor shall employ two independent licensed exterminators: one to engage in survey and monitoring work to establish the level of infestation of rodents and insects and provide recommendations for specific Integrated Pest Management (IPM) actions, and one to execute the rodent and waterbug pest control work to deal with such infestations. All pest control personnel employed by each exterminator company must be supervised by an exterminator licensed in categories 7A & 8. The Contractor shall submit the names and license credentials of the two exterminator companies to the Engineer for approval prior to the commencement of any work under this section.

**7.88.4. METHODS.** Application and dosage of all materials shall be done in strict compliance with the manufacturer's recommendations. All surveying, monitoring, baiting, and/or live trapping work shall be performed in the presence of the Engineer, without which no payment will be made under this Section.



(A) GENERAL

The Contractor's construction activity is expected to disturb any established rodent and/or waterbug population that may exist within the project limits, possibly causing their dispersion. The Contractor shall take all appropriate action to eliminate and/or control these populations within the construction corridor. The construction corridor shall be defined as being the full width of streets under the contract and intersecting streets up to the limits of construction, from property line to property line, excluding buildings and under sidewalk building vaults.

Under the Maintenance of Site requirements for the contract, any unsanitary conditions, such as uncollected garbage or debris, resulting from the Contractor's activities which will provide food and shelter to the resident rodent population shall be corrected by the Contractor immediately after notification of such condition by the Engineer. Non-compliance shall be subject to the application of the "Nonconformance" provisions of the Item for Maintenance of Site, and no payment will be made for any additional application of rodenticide or insecticide needed to control resultant infestations.

(B) SURVEY AND MONITORING WORK

(1) Prior to Construction - The Contractor's designated survey and monitoring exterminator shall execute a survey of the project area and estimate the level of rodent (Norway rat, House mouse) infestation and the waterbug population within the construction corridor. An appropriate sample of utility manholes (sewer, electrical, telephone, etc.) and catch basins should be opened and surveyed to the satisfaction of the Engineer. Contractor shall maintain all survey records in the manner described in 7.88.6., Records and Reports.

(2) During Construction - The Contractor shall monitor the rodent activity through trapping (snap, glue traps or live traps), fecal count methods, and inspection of the conditions of all installed baits every week during construction activity or as otherwise directed by the Engineer. Contractor shall maintain all monitoring records in the manner described in 7.88.6., Records and Reports.

(C) RODENT CONTROL WORK

(1) Wetlands, Woodlands and Areas Within Seventy-five (75') feet of a Stream. In wetlands, woodlands and areas adjacent to a stream, special precautions must be taken to protect water quality and to ensure the safety of other wildlife. To prevent poisoned bait from entering streams, no poisoned bait shall be used in areas within seventy-five (75') feet of either streambank. Live traps must be used in these seventy-five (75') feet buffer zone areas and within wetland and woodland areas.

(2) Outside Wetland Areas, Woodland Areas and Beyond Seventy-five (75') feet of a Stream. In areas outside the seventy-five foot zone of protection adjacent to streams, and areas outside wetlands and woodlands, tamper proof bait stations with poisoned bait shall be established during the period of construction and any consumed or decomposed bait shall be replenished as directed.

Rodent control shall be achieved in two stages as follows:

- Stage I. At least one month prior to initiation of the construction work, and periodically thereafter, live traps and/or rodenticide bait, as directed above, shall be placed at locations [e.g., burrows, utility manholes (sewer, electrical, phone, etc.), and catch basins] that are inaccessible to pets, human beings, children and other non-target species, particularly wildlife (e.g., birds) in the construction corridor. Locations of initial bait placement and quantities of bait shall be determined by the survey and monitoring exterminator's written report of his survey and monitoring results, or as otherwise directed by the Engineer.
- Stage II. During Construction - Infested sites as determined by the survey and monitoring exterminator's monitoring report shall be baited and/or rebaited, and live traps shall be collected and replaced, the rates and quantities of which shall be determined by the written monitoring reports submitted weekly or as otherwise directed by the Engineer in consultation with the City's Office of Pest Control.

The baiting exterminator shall be responsible for collecting and disposing of all trapped and poisoned rodents found in live traps and tamper proof bait stations. The baiting exterminator shall also be responsible for posting and maintaining signs announcing the baiting of each particular location.

The Contractor, under his maintenance of site operations, shall be responsible for the immediate collection and disposal of any visible rodent remains found on streets or sidewalk within the project limits. Any visible remains shall be placed into double plastic bags. No more than five (5) carcasses shall be placed into each bag. Each bag shall be a minimum of 3 mils thick, black plastic. No additional payment will be made for this work.

It is anticipated that public complaints will be addressed to the Engineer's Field Office. The Contractor, where directed by the Engineer, shall take appropriate Integrated Pest Management (IPM) actions, such as baiting, trapping, proofing, etc., to remedy the source of a complaint within the next six (6) hours of normal working time, which is defined herein, for the purposes of this section, as 7 A.M. to 6 P.M. on Mondays through Saturdays.

(D) WATERBUG (AMERICAN COCKROACH) CONTROL

Infested sites (e.g., sewers) shall be baited at least 2 times per month with insecticides, or as directed by the Engineer in consultation with the exterminator monitoring the work and the City's Office of Pest Control.

**7.88.5. EDUCATION & TRAINING.** The Contractor shall post notices in all Construction Bulletin Boards advising workers, employees, and residents to call the Engineer's Field Office to report rodent and waterbug infestations. The Contractor shall provide and distribute literature pertaining to IPM techniques of rodent control to affected businesses and superintendents of nearby residential buildings to ensure their participation in maintaining their establishments free of unsanitary conditions, harborage removal and rodent proofing.

Prior to application of any chemicals, the Contractor shall furnish copies or sample labels for each pesticide, antidote information, and Material Data Safety Sheets (MSDS) for each chemical used.

**7.88.6. RECORDS AND REPORTS.**

**(A) GENERAL**

The Contractor shall be responsible for assigning within the construction corridor an identifying number to each manhole, catch basin, and other location where bait and/or live trap placement and/or waterbug control work is proposed by the survey and monitoring exterminator. The Contractor shall then provide that list of locations and corresponding reference numbers along with a drawing showing the locations, as a reference for the exterminator(s) performing the work, to indicate locations of bait placement and waterbug control work and rodent and waterbug activity (droppings, bait consumed, dead rodents, etc.).

**(B) SURVEY AND MONITORING WORK**

(1) Prior to Construction - Contractor shall submit to the Engineer, for approval, a written survey report including proposed IPM procedures, including specific materials, quantities, locations, methods, and time schedule for the implementation of the exterminating work. The written report shall also include a survey with a drawing (provided by the Contractor) marked with locations indicating all signs of rodent (Norway rat, House mouse) infestation and waterbug activity discovered during the execution of the survey indicating that rodent and waterbug pest control work is necessary.

(2) During Construction - Based on monitoring results, Contractor shall submit to the Engineer a weekly written monitoring report identifying all locations and conditions of installed bait and/or other rodent control work. The monitoring report shall also include any other recommended IPM techniques, such as baiting, trapping, proofing, etc., proposed for rodent and waterbug pest control.

The survey and monitoring exterminator shall keep a record of all rodent and waterbug infestation surveys s/he has conducted. The Contractor shall be required to submit a copy of all survey and monitoring reports to the Engineer each week, prior to payment.

**(C) RODENT AND WATERBUG CONTROL WORK**

The baiting exterminator shall maintain records of all locations baited along with the type and quantity of rodenticide and insecticide bait used. These records will be kept by the City Inspector. A weekly report shall be prepared, signed and certified by the approved licensed exterminator, and such reports shall be submitted to the Engineer each week, prior to payment.

**7.88.7. NONCONFORMANCE.** If the Contractor fails to perform as directed to control the rodent and/or waterbug population at any location within the project limits for a period of more than one week, the Engineer will correct the adverse conditions by any means he deems appropriate, including but not limited to, the use of "outside services" and shall deduct the cost of the corrective work from any monies due to the Contractor. The deducted cost of this work shall be in addition to the non-payment for rodent and waterbug pest control.

**7.88.8. MEASUREMENT.**

**(A) RODENT INFESTATION SURVEY AND MONITORING**

The quantity to be measured for payment under Item No. 7.88 AA, RODENT INFESTATION SURVEY AND MONITORING, shall be a Lump Sum measurement.

**(B) RODENT BAIT STATIONS**

The quantity to be measured for payment under Item No. 7.88 AB, RODENT BAIT STATIONS, shall be the number of tamper-proof rodent bait station boxes and/or live traps satisfactorily installed or reinstalled after inspection within the construction corridor, as approved by the Engineer. However, the initial baiting, and subsequent rebaiting as may be required, of any bait station will be paid for under Item 7.88 AC.

**(C) BAITING OF RODENT BAIT STATIONS**

The quantity to be measured for payment under Item No. 7.88 AC, BAITING OF RODENT BAIT STATIONS, shall be the number of tamper-proof rodent bait station boxes, utility manholes, catch basins, or other locations approved by the Engineer, satisfactorily baited or rebaited to replenish consumed or decomposed bait within the construction corridor, as approved by the Engineer.

**(D) WATERBUG BAIT APPLICATION**

The quantity to be measured for payment under Item No. 7.88 AD, WATERBUG BAIT APPLICATIONS, shall be the number of blocks satisfactorily treated with insecticide bait within the construction corridor, as approved by the Engineer. A block shall be defined as the area of street, measured between property lines, from intersection to intersection. Each rebaiting of any block shall be considered as a new block for measurement purposes.

**7.88.9. PRICES TO COVER.**

**(A) RODENT INFESTATION SURVEY AND MONITORING**

Payment will be made at the lump sum price bid for RODENT INFESTATION SURVEY AND MONITORING which shall include the cost of furnishing all the labor, materials, plant, equipment (traps, etc.), insurance, and other incidentals required, including but not limited to providing all required maintenance of traffic equipment, to perform a rodent infestation survey of the project area and then monitor the site each week for rodent activity, all in accordance with the specifications and the directions of the Engineer.

Ten (10%) percent of the lump sum price bid will be paid when the initial survey of the project area has been completed and the written survey report has been submitted to the satisfaction of the Engineer. The remainder will be paid in proportion to the percentage of contract completion.

(B) RODENT BAIT STATIONS

The Contract price bid for RODENT BAIT STATIONS shall be a unit price per each tamper proof bait station box and/ or live trap installed or reinstalled after inspection and shall cover the cost of furnishing all labor, materials, plant, equipment (bait stations, etc.), insurance, and other incidentals, including but not limited to providing all required maintenance of traffic equipment, required to control the rodent population found within the project limits in accordance with the specifications and the directions of the Engineer.

In addition to the payment for Rodent Bait Stations installed or reinstalled under this Item 7.88 AB, the Contractor will also be paid for each baiting or rebaiting, when required, of each bait station, under Item No. 7.88 AC.

(C) BAITING OF RODENT BAIT STATIONS

The Contract price bid for BAITING OF RODENT BAIT STATIONS shall be a unit price per each bait station, utility manhole, catch basin or other location approved by the Engineer satisfactorily baited or rebaited, when required, and shall cover the cost of furnishing all labor, materials, plant, equipment (bait), insurance, and other incidentals, in accordance with the specifications and directions of the Engineer. Installation or resetting of the bait station will be paid for under Item 7.88 AB.

(D) WATERBUG BAIT APPLICATION

The Contract price bid for WATERBUG BAIT APPLICATION shall be a unit price per block treated by the exterminator and shall include the cost of furnishing all the labor, materials, plant, equipment (bait, etc.), insurance, and other incidentals, including but not limited to providing all required maintenance of traffic equipment, necessary to control the waterbug population found within the project limits for the duration of the contract in accordance with the specifications and the directions of the Engineer.

*Payment will be made under:*

Item No.	Item	Pay Unit
7.88 AA	RODENT INFESTATION SURVEY AND MONITORING	L.S.
7.88 AB	RODENT BAIT STATIONS	EACH
7.88 AC	BAITING OF RODENT BAIT STATIONS	EACH
7.88 AD	WATERBUG BAIT APPLICATION	BLOCK

3. NEW SECTIONS

SECTION 4.11 ARW

Retaining Wall Excavation

1. Description. Under this Section, the Contractor shall remove portions of existing concrete, rubble stone or brick retaining walls at designated locations to permit new utility or other proposed construction to proceed, in accordance with the plans, the specifications and the directions of the Commissioner.

2. Materials. Not Applicable.

3. Methods. Excavation work shall be in accordance with Section 4.11 of the Standard Specifications, and shall include all work related to the support of excavation methods, careful removal and selective demolition of portions of existing retaining walls consisting of concrete, rubble stone, brick, or other materials, as well as related earth excavation to maintain stable side slopes, all as shown on the plans, as necessary or as directed by the Commissioner. To facilitate reconstruction of the walls in-place in-kind under Section 8.22, the Contractor shall fully document and record all the features, extents, dimensions, offsets, configurations and all other specific details of the existing wall *in situ* as directed by and to the satisfaction of the Commissioner prior to any demolition commencing.

In addition, the Contractor shall be required to salvage and store at the site all rubble stone and brick masonry including cap stones removed, for reuse in restoring the walls under Section 8.22. Cleaning of the stones, bricks and other materials for re-use will be performed separately under Section 8.22. Any deficiency in the quantity of rubble stones or bricks required to complete the wall restoration work under Section 8.22 shall be furnished by the Contractor, at no additional cost to the City. Concrete retaining wall removals and removal of certain other wall types when necessary and directed will include saw cutting to provide a straight vertical construction joint for subsequent wall reconstruction.

The Contractor shall be responsible for maintaining the integrity of the existing wall during and after selective demolition operations. Calculations, shop drawings and details for installing temporary sheeting, underpinning or other excavation support methods as may be necessary and as directed by the Commissioner shall be prepared, stamped and signed by a licensed Professional Engineer registered in the State of New York; and submitted by the Contractor to the Commissioner at least 30 days in advance of performing the work.

Review and acceptance of Contractor's excavation support design by the Commissioner does not in any way relieve the Contractor or his Professional Engineer of responsibility for the adequacy of the support design.

4. Measurement. The quantity to be measured for payment under Item No. 4.11 ARW Retaining Wall Excavation shall be the number of cubic yards of retaining wall structure actually removed, including any required adjacent earth excavation cut-backs for stability, at locations shown on the plans or directed by the Commissioner.

5. Price to Cover. The contract price bid per cubic yard of excavation under Item No. 4.11 ARW Retaining Wall Excavation shall cover the cost of all labor, material, plant, equipment and incidentals necessary to document, perform selective demolition and removal of existing retaining wall materials, clean, store and salvage selected materials for re-use, and to provide related support of excavation designs, all in accordance with the plans, the specifications, and directions of the Commissioner.

Payment will be made under:

Item No.	Item	Pay Unit
4.11 ARW	RETAINING WALL EXCAVATION	C.Y.

SECTION 6.24 X

Gravel Walkway

1. Description. Under this Section, the Contractor shall furnish and install 6-inch thick gravel walkway, consisting of a 2-inch thick, after compaction, top course of screenings laid on a 4-inch thick, after compaction, foundation of dense-graded stone base. Filter fabric, where required, may be placed beneath the stone base for additional support, for which separate payment will be made under Item 6.68.

2. Materials. Screenings shall comply with the requirements of Section 2.02 of the Standard Specifications for Type 1, Grade B screenings. Soil gradation shall be as indicated on Table 2.02-II for Screenings. Color and appearance shall be as approved by the Engineer.

Dense-graded stone base course shall comply with the requirements of Section 6.46 of the Standard Specifications.

3. Methods. The screening material shall be spread in two (2) courses, each 1-inch in thickness after compaction. Spreading shall be performed with spreading equipment approved by the Engineer. Spreading from piles dumped on the ground will not be permitted. The material as spread shall be well graded. Water shall be added in amounts necessary to obtain satisfactory compaction.

Placement of the 4-inch thick (after compaction) foundation of dense-graded stone base shall be in accordance with Section 6.46 of the Standard Specifications.

Filter fabric, where required, may be placed beneath the stone base course for additional support in areas of poor subgrade. Furnishing and placing of filter fabric will be paid separately under Item 6.68.

The finished gravel walkway surface shall be uniformly sloped and graded to drain, as indicated on the Plans or directed by the Engineer.

4. Measurement. The quantity of gravel walkway to be measured for payment shall be the number of square feet of 6-inch thick gravel walkway actually installed on site, measured in place, to the satisfaction of the Engineer.

5. Price to Cover. The contract price bid shall be a unit price per square foot and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to install 6-inch thick gravel walkway, including stone screenings surface course and dense-graded stone base course, all in accordance with the plans, the specifications, and directions of the Engineer.

Payment will be made under:

Item No.	Item	Pay Unit
6.24 X	GRAVEL WALKWAY, 6-INCH THICK	S.F.

SECTION 6.56 ERGC

Epoxy Resin Granite Chip Pavement Overlay

**6.56.1. INTENT.** This section describes Epoxy Resin Granite Chip Pavement Overlays.

**6.56.2. DESCRIPTION.** Install a coarse surface treatment at the locations noted in the plans and in the color and texture as specified in the contract documents.

**6.56.3. MATERIALS.**

(A) Binder.

Composed of a two component epoxy or other polymer binder system. Resist deterioration when exposed to sunlight, gasoline, oil, salt, water or adverse weather conditions. Shelf life of 1 year after manufacture.

Be compatible with and provide a firm bond to the surface it is being applied to (asphalt or concrete). Be compatible with and provide a firm bond to the aggregates being applied to the surface.

Not contain 0.1% or more of any chemical listed by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP), or regulated by the US Occupational Safety and Health Administration (OSHA) as a carcinogen.

Conform to current Federal, State and Local air pollution regulations, including those for the control (emission) of volatile organic compounds (VOC) as established by the U.S. EPA and the NYSDEC.

Physical requirements:

EPOXY BINDER REQUIREMENTS

<u>Property</u>	<u>Requirement</u>	<u>Test Method</u>
Ultimate Tensile Strength	2,000 psi min.	ASTM D638
Compressive Strength	1,600 psi min.	ASTM D695
Peak Exothermic Temperature	150°F min.	ASTM D2471
Water Absorption	Less than 0.25%	ASTM D570
Shore Hardness	70 min.	ASTM D2240
Bleed Test	Little trace	Swab test visual 7 days @ RT
Cure Rate	3.5 hours max.	Thin Film @ 75°F

(B) Aggregates:

Granite, chert, traprock, ore tailings, slag or other similar noncarbonate materials.

Gravel or a natural or manufactured blend of the following types of materials: limestone, dolomite, gravel, sandstone, granite, chert, traprock, ore tailings, slag or other similar materials, meeting the following requirements:

a. 12.5 Nominal Maximum Size Aggregate Mixes. Noncarbonate plus 1/8 inch particles must comprise a minimum of 10.0% of the total aggregate (by weight with adjustments to equivalent volumes for materials of different specific gravities). A minimum of 20.0% of plus 3/8 inch particles must be noncarbonate.

b. 9.5 Nominal Maximum Size Aggregate Mixes. Noncarbonate plus 1/8 inch particles must comprise a minimum of 10.0% of the total aggregate (by weight with adjustments to equivalent volumes for materials of different specific gravities). A minimum of 20.0% of plus No. 4 particles must be noncarbonate.



Be clearly labeled and in a dry and clean condition upon delivery to the job site.

Be maintained and stored in a dry and clean condition prior to use.

#### 6.56.4. METHODS.

##### (A) General

The Contractor shall submit to the Engineer for approval, all product data on the proposed system, samples of the system displaying the specified colors, and the information on the equipment used in the installation process.

Work shall be performed by a manufacturer certified applicator, or a manufacturer's representative must be on site to provide technical assistance during surface preparation, material placement, and during any necessary remedial work.

Follow all exposure, respiratory and personal protective equipment controls, handling and safety precautions and spill and disposal procedures as identified by materials safety data sheets (MSDS), labels and other manufacturer's recommendations for the products used. Provide the Engineer copies of all applicable MSDS sheets and safety literature.

The Contractor shall prepare all surfaces to be treated, and apply surface treatment in accordance with manufacturer's recommendations and this specification.

##### (B) Weather Limitations.

Do not apply binder material on a wet surface, when the ambient and/or surface temperature is below 50°F or above 95°F, or when anticipated weather conditions would prevent the proper construction of the surface treatment, as determined by the manufacturer.

##### (C) Surface Preparation.

Prior to treatment application, clean and fill all cracks in the placement that are larger than ¼ inch with a manufacturer approved crack sealant. Clean existing surfaces by use of mechanical sweepers, high pressure air or other methods approved by the Engineer prior to use.

Blastcleaning, shotblasting or use of mechanical abrading equipment may be required to clean highly contaminated surfaces. Receiving surfaces must be clean, dry and free of all dust, oil, debris and any other material that might interfere with the bond between the epoxy binder material and existing surfaces. Surfaces may need to be washed with a mild detergent, rinsed and dried using a hot compressed air lance. Remove any existing pavement markings as deemed necessary by the manufacturer. Adequate cleaning of all surfaces will be determined by the Engineer and the manufacturer's representative.

Apply masking as necessary at the perimeter of the area to be treated. Protect all utilities, drainage structures, curb, and any other structure within, and adjacent to, the treatment location against the application of the surface treatment materials. Cover and protect all existing joints, pavement markings and utilities prior to placement. Pavement joints must be maintained and protected. Restore all damaged and/or contaminated joints to an acceptable working condition, to the satisfaction of the Engineer. A preliminary layer of epoxy may be required to properly fill in open pavement surfaces. If a primer is required, the Contractor shall use a manufacturer-recommended primer.

(D) Mockup.

Prior to commencing any final installation, the Contractor shall prepare a full -size mockup of not less than 100 SF of the finished surface treatment using all the materials and methods intended for use in the work. The mockup shall be approved by the Engineer prior to commencing any final work and the approved mockup shall remain the basis of acceptable workmanship throughout the length of the contract. The mockup may, at the discretion of the Engineer, be incorporated into the final work.

(E) Installation:

Place the surface treatment in accordance with manufacturer's recommended methods and to the thicknesses and details as shown in the Contract Documents. Mix the binder components (A & B) at the proportions specified by the binder manufacturer, using a method which produces an evenly mixed, homogenous product, such as a low speed high torque drill fitted with a helical stirrer, or with an automated system.

The mixed components may be machine or hand applied onto the cleaned surface at the coverage rate specified by the manufacturer. Evenly spread the binder with serrated edge squeegees or with an automated spreading system for single placement areas greater than 500 square yards. Uniformly distribute the binder over the section to be treated and within the temperature range specified. Proceed in such a manner that will not allow the binder material to set up, dry, or otherwise impair retention of the aggregate. Care must be taken when applying binder to sloped surfaces, uniform thickness must be maintained over the entire placement area.

Machine-applied distributing equipment shall include accurate measuring devices and/or calibrated containers and thermometers for measuring the binder temperature prior to placement.

Immediately apply the appropriate aggregate at the rate recommended by the manufacturer to achieve the required density and texture. No exposed "wet spots" of binder shall be visible once the aggregate is placed.

(F) Curing.

Allow the treatment to cure in accordance with manufacturer recommendations, approximately 3 hours at an ambient temperature of 68°F, remove the excess aggregate by hand or suction sweeping before opening to traffic. Additional sweeping may be necessary after the system fully cures.

(G) Acceptance Evaluation.

Within 90 days after construction of the surface treatment, or prior to contract acceptance, whichever comes first, the Department will evaluate that the aggregate coverage is complete and there is no exposed binder visible. Repair any areas containing exposed binder according to manufacturer's recommendations at no additional cost to the State.

(G) Basis of Approval.

All systems shall have completed a successful trial installation of approximately one year at a location approved by the Engineer. The binder/aggregate system used must be evaluated by the Engineer 45 days prior to use. The contractor shall submit to the Engineer product data, MSDS sheets on the proposed system, aggregate samples, and samples of the system displaying the colors and textures specified. Additional quality assurance samples of aggregate and binder components used during installation, at a minimum rate of 1 quart can sample per 100 square yards, or as directed by the Engineer, shall be submitted for testing.

(H) Basis of Acceptance.

The surface treatment must meet the requirements of this specification and have Manufacturer's certification that it meets the requirements of this specification.

**6.56.5. MEASUREMENT.**

This work will be measured as the number of square feet of surface treatment material installed satisfactorily.

**6.56.6. PRICES TO COVER.**

The unit price bid per square foot shall include the cost of all labor, materials and equipment necessary to satisfactorily complete the work.

Payment will be made under:

Item No.	Item	Pay Unit
6.56 ERGC	Epoxy Resin Granite Chip Pavement Overlay	S.F.

SECTION 6.66 X

Furnish and Install Brick Pavers

1. Description. Under this Section, the Contractor shall furnish and install brick pavers in the appropriate design pattern(s), sizes, shades and colors as shown on the Plans or as directed by the Engineer. Dense-graded stone base course will be paid separately under Item 6.46.

2. Materials. Brick Pavers shall be in accordance with Section 6.66 of the Standard Specifications and shall match to the complete satisfaction of the Engineer, the existing brick pavers previously removed during excavation.

Mineral (Stone) Dust shall comply with the requirements of Section 2.18 of the Standard Specifications.

Sand shall comply with Section 2.21 of the Standard Specifications.

Dense-graded stone base course, paid separately under Item 6.46, shall comply with the requirements of Section 6.46 of the Standard Specifications.

3. Methods. Brick Pavers shall be installed in accordance with Section 6.66 of the Standard Specifications, except that the bituminous setting bed and other requirements related to installation over a concrete base shall be deleted.

Pavers shall be laid in a pattern to match existing surrounding brick pavements, as shown on the plans or as directed by the Engineer, to provide a uniformly even surface. Tamp bricks with suitable tool so that brick course is firmly settled in compacted mineral dust setting bed. Pavers shall be set flush with a top surface elevation tolerance of 1/16" between adjacent pavers but not more than +/- 1/32" at perimeters between pavers and adjacent curb or sidewalk surfaces. Sweep hand-tight joints with masonry sand until completely filled to the satisfaction of the Engineer.

The finished brick walkway surface shall be uniformly sloped and graded to drain, as indicated on the Plans or directed by the Engineer.

The new brick pavement on mineral dust setting bed will be placed on a foundation of dense-graded stone base course, as shown on the plans. The dense-graded stone base course will be paid separately under Item 6.46.

4. Samples. Submit brick paver samples of the color, range, surface texture and dimensions proposed, for review and approval by the Engineer. Submit mineral dust and sand material data for Engineer's approval. Prior to the start of work, the Contractor shall construct a mock-up of the proposed paving not less than 64 SF for approval by the Engineer. The mockup shall be approved by the Engineer prior to commencing any final work and the approved mockup shall remain the basis of acceptable workmanship throughout the length of the contract. The mock-up may be incorporated into the finished work subject to the Engineer's approval.

5. Measurement. The quantity to be measured for payment shall be the number of square feet of brick pavers actually installed on site, measured in place, to the satisfaction of the Engineer.

6. Price to Cover. The contract price bid shall be a unit price per square foot and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to install brick pavers, including mineral dust setting bed and sand-swept joints, all cleaning, cutting and other incidental work, all in accordance with the plans, the specifications, and directions of the Engineer.

The dense-graded stone base course will be paid separately under Item 6.46.

Payment will be made under:

Item No.	Item	Pay Unit
6.66 X	FURNISH AND INSTALL BRICK PAVERS	S.F.

SECTION 8.22

Restore Existing Rubble Stone or Brick Retaining Wall

1. Description. Under this Section, the Contractor shall be required to restore portions of existing rubble stone, brick or other types of retaining walls at designated locations where existing walls were removed to permit new utility or other proposed construction, in accordance with the plans, the specifications and the directions of the Commissioner.

2. Materials. Rubble stones or brick used in reconstructing retaining walls shall be stones or brick removed and salvaged under Item No. 4.11 ARW. All additional materials, when required, including grout, mortar, weep holes etc., shall be as approved by the Commissioner.

Where a concrete foundation, slab or wall backing is indicated on the Plans, found in the field or directed by the Commissioner, such concrete will be paid separately under Item 4.06. Any reinforcing steel required will be paid under Item 4.14.

3. Methods. Rubble stone, brick masonry (including cap stones) or other wall type materials from the existing walls removed under Item No. 4.11 ARW, shall be salvaged, cleaned and temporarily stored at the site for reuse under this Section. Any deficiency in the quantity of rubble stones or brick masonry required shall be furnished by the Contractor, at no additional cost to the City.

The Contractor shall be required to restore portions of existing rubble stone, brick or other types of retaining walls at designated locations for the purpose of replacing the existing wall previously removed to permit new utility or other proposed construction. Limits of restoration work shall be as shown on the plans or as directed by the Commissioner.

Prior to rebuilding any parts of the wall, the Contractor shall be required to clean and remove all deteriorated stone, brick, cement, mortar, concrete, dirt and debris from the existing adjacent portions of the retaining wall to the satisfaction of the Commissioner.

The restoration work shall not alter the existing retaining wall either functionally or in appearance. The dimensions of the wall, size and pattern of rubble stones or bricks, grout/mortar color, placement and spacing of weep holes, and overall workmanship shall match in all aspects that of the existing wall in-kind. Work shall include re-setting of cap stones as required to match existing adjacent wall conditions.

Where a concrete foundation slab is required under the stone or brick wall for support, or a concrete backing is required behind the stone or brick wall for support, as indicated on the Plans or as directed by the Commissioner, placement of such concrete will be paid separately under Item 4.06. Any reinforcing steel required will be paid separately under Item 4.14.

After the existing wall has been restored and completed to the satisfaction of the Commissioner, all excess stones, bricks and materials shall become the property of Historic Richmond Town, to be moved and stored as directed.

4. Measurement. The quantity to be measured for payment under Item No. 8.22 RS Restore Existing Rubble Stone Retaining Wall shall be the number of cubic yards of rubble stone retaining wall actually restored to the satisfaction of the Commissioner, measured within the limits of restoration shown on the plans or directed by the Commissioner.

The quantity to be measured for payment under Item No. 8.22 BR Restore Existing Brick Retaining Wall shall be the number of cubic yards of brick retaining wall actually restored to the satisfaction of the Commissioner, measured within the limits of restoration shown on the plans or directed by the Commissioner.

Concrete foundations or concrete wall backing material will be paid separately and shall not be measured for payment under the items of this Section.

5. Price to Cover. The contract price bid per cubic yard of restoration under Item No. 8.22 RS Restore Existing Rubble Stone Retaining Wall shall cover the cost of all labor, material, plant, equipment and incidentals necessary to restore rubble stone retaining walls to match existing, complete in place, including disposal of excess materials not kept by the Owner, all in accordance with the plans, the specifications, and directions of the Commissioner.

The contract price bid per cubic yard of restoration under Item No. 8.22 BR Restore Existing Brick Retaining Wall shall cover the cost of all labor, material, plant, equipment and incidentals necessary to restore brick retaining walls to match existing, complete in place, including disposal of excess materials not kept by the Owner, all in accordance with the plans, the specifications, and directions of the Commissioner.

Payment will be made under:

Item No.	Item	Pay Unit
8.22 RS	RESTORE EXISTING RUBBLE STONE RETAINING WALL	C.Y.
8.22 BR	RESTORE EXISTING BRICK RETAINING WALL	C.Y.

## SECTION 500

## Archaeological Testing, Monitoring And Conservation Services

**500.1. INTENT.** This section describes the services associated with archaeological testing, monitoring and conservation services.

**500.2. DESCRIPTION.** During the course of this contract, various services for archaeological testing, monitoring, conservation, lab testing, reporting and field observation will be required to be provided by the Contractor as directed by the Engineer and as specified in the contract documents. The Contractor will provide services for the following tasks:

- Archeological Testing
- Archeological Monitoring
- Archeological Conservation
- Archeological Lab And Field Technician
- Archeological Final Report
- Physical Anthropologist
- Public Education Program

Measure and Payment for each service will be separately described below.

**500.3. WORK:** Under these Items, the Contractor shall hire an approved archeological Contractor(s) to perform ARCHEOLOGICAL TESTING, ARCHEOLOGICAL MONITORING, ALLOWANCE FOR ARCHEOLOGICAL CONSERVATION, ALLOWANCE FOR ARCHEOLOGICAL LAB AND FIELD TECHNICIAN, ALLOWANCE FOR ARCHEOLOGICAL FINAL REPORT, ALLOWANCE FOR PHYSICAL ANTHROPOLOGIST and ALLOWANCE FOR PUBLIC EDUCATION PROGRAM in accordance with the plans, specifications, and directions of the Engineer. Archeological Testing and Monitoring must be performed where shown on the Plans throughout the site as determined by the Landmarks Preservation Commission (LPC).

**500.4. INTENT:** A Phase 1A Archeological Assessment Study (Geismar 2001, updated 2013) has been reviewed and approved by the LPC. This study determined that the site has the potential to contain 17th –19th century archaeological resources including possible human remains. Archeological test locations as determined by LPC as they relate to the potential construction impacts are shown on the Plans. These test locations are to determine the actual archaeological sensitivity of the various locations throughout the project area. The findings of this limited archaeological testing will be used to determine whether any additional archaeological testing will be required by LPC and what level of archaeological monitoring is appropriate.

**500.5. QUALIFICATIONS:** The archaeological contractor shall demonstrate that they meet the following minimum qualifications subject to approval of the Agency:

**500.5.1** The contractor/subcontractor shall have the capability to provide all personnel and equipment required to perform the work.

**500.5.2** The contractor/subcontractor shall be a firm regularly engaged in the business of archival, historical, or archeological investigation, with demonstrable capability in the work herein described. The contractor shall identify the staff necessary to perform the specified work, as well as a team of professionals that include a Principal Investigator (P.I.) and a project manager, though these two may be the same person. The team will, at a minimum, include the following:

- P.I. shall be eligible for certification by the Registry of Professional Archaeologist. The Bidder's P.I. shall be the P.I. for the duration of the contract and shall be responsible for completing all obligations therein.
- A project manager who has managed projects of the magnitude of this project.



- An archeologist with a graduate degree in Anthropology, with a specialization in Historical Archeology, plus experiences performing historic archeological investigations and preparing final reports consistent with the Secretary of the Interior's Standards and Guidelines for Archeology and Historic Preservation.
- A conservator who is a member of the American Institute of Conservation, and must be considered a Professional Associate or Fellow within the organization, or demonstrate that the standards and experience required for membership are possessed.
- A physical anthropologist with a graduate degree in Anthropology with a specialization in Physical Anthropology and experienced in the analysis of historic cemeteries.

**500.5.3** The NYC Landmarks Preservation Commission will monitor all phases of the Archeology work and the archeological contractor shall be held liable for unsatisfactory work and methods. The NYC Landmarks Preservation Commission will have approval of the proposed candidate and shall monitor all phases of archeological work.

The contractor shall be held liable for all unsatisfactory work and methods.

**500.6 SPECIFIC TASKS:** The Contractor is required to provide for following tasks as described below:

**500.6.1 ARCHEOLOGICAL TESTING:** The location and extent of field testing as required by the LPC and the Agency is shown on the plans. The approved Archeologist (minimum qualifications described above) shall be on site for archeological testing. They shall:

- (1) Prepare a Scope of Work detailing the extent of testing and methodology to be used as well as an explanation of how significance will be determined. This must be reviewed and approved by LPC and the Agency.
- (2) Execute the field testing according to the approved scope which must adhere to the Archaeological Guidelines for NYC (2002)
- (3) Note all primary burials must be protected in place as per the Landmarks' and the Agency's approval. The physical anthropologist is responsible for documenting any burials left in situ as well as analyzing any other human remains that maybe found.
- (4) All archeological resources found must be conserved and stored according to current professional standards.
- (5) The archaeologist shall analyze the results of the archeologist testing and;
- (6) Produce a professional quality final report which must be reviewed and approved by LPC and the Agency. If significant resources have been found, the Archeologist will be encouraged to submit the results for publication in a peer-reviewed professional journal.

**500.6.2 ARCHEOLOGICAL MONITORING:** The extent of archeological monitoring has yet to be determined by the LPC and the Agency, and will be based upon the findings of the archaeological testing. At this time, it appears that the majority of construction will not need to be monitored. The archeologist will have the authority to stop any/all construction activity until the significance of potential archeological resources has been determined by them. The archeologists must confer with the NYC Landmarks Preservation Commission and the Agency about the treatment of any significant resources before construction activities may proceed in the area.

The approved archeological monitoring team shall:

- (1) Prepare a Scope of Work detailing the extent and methodology to be used as well as an explanation of how significance will be determined. This must be reviewed and approved by LPC
- (2) and the Agency. All soil excavation within archeologically sensitive areas must be monitored at all times and shall be hand excavated by the construction crew at the discretion of the archaeological monitoring team
- (3) If potentially significant archeological remains are encountered, construction must cease in the area and scientific excavation will be performed by the archeologists. In the event that human remains are encountered, the protocols described in the Archaeological Guidelines for NYC 2002 must be adhered to and the archaeologist shall contact the physical anthropologist to come to the site to document any primary burials in place as they will be protected and remain in place. The

physical anthropologist shall also be responsible for analyzing any other human remains that may be found.

(4) Produce a professional quality final report which must be reviewed and approved by LPC. If significant resources have been found, the archeologist will be encouraged to submit the results for publication in a peer reviewed professional journal.

The Monitor shall provide all necessary archeological equipment and crew, who must meet standards set forth above. They shall be responsible for recording all archeological activities according to professional standards and must provide a professional quality final report to the NYC Landmarks Preservation Commission for review.

Additional subsurface construction related excavation may be required as construction proceeds. In this case, the archaeologist must submit a scope of work for any additional archaeology that may be required to DPR and to the LPC for review and approval before work commences.

**500.6.3 PUBLIC EDUCATION PROGRAM:** As this project has the potential for the disturbance of human remains, a physical anthropologist should be on call during monitoring and there will be public involvement with the project. One of the responsibilities of the Archeological team is to provide public education. Both the Archeologist and the Archeological Monitor will be responsible for providing handouts to educate the public about all phases of their activities, and shall make such handouts available for public distribution at the site each day that work is to be performed. These handouts must be reviewed and approved by LPC and the Agency before being distributed. Additionally, if significant resources are found, the findings of this project must be presented in at least two (2) public forums in locations to be determined by NYCDDC. If sufficient public interest arises, as determined by NYCDDC, the Archeological Team must provide additional lectures, question and answer sessions; etc., as per NYCDDC directions.

#### **500.7 METHODS OF MEASUREMENT**

**500.7.1: Fixed Sum Items:** The fixed price lump sum shown in the bid proposal for this item shall be considered the price bid, although actual payment will be based on the work performed. The fixed sum is not to be altered in any manner by the bidder.

It is agreed that all work shall be based on the actual number of hours that each archaeological staff person performs at a location in addition to travel time. Total travel time will not exceed two hours per day. Furthermore, it is understood that the total estimated costs shall include a fringe/leave allowance equal to no more than 60% of the hours worked by the archaeological staff person, supervisory personnel and administrative personnel.

The hours for supervisory personnel will be based on a percentage basis of man-hours worked by archaeological staff persons including travel time. Payment for the supervisory personnel will be made based on 2.0% of all hours worked by archaeological staff persons. Supervisory personnel hours are not subject to audit.

The hourly rate paid shall be the archaeological staff person's actual yearly salary, including uniform allowance, divided by the number of normal hours paid per year, including leave and holiday hours for archaeological staff person and supervisors. Those archaeological staff person and supervisors working overtime, including weekends and holidays, will be paid one and one-half (1-1/2) times their regular hourly rate.

**500.7.2 Person Hour Items:** The number of hours shall be professional rate hours paid for under these items and shall be the actual number of **PERSON HOURS** spent on to accomplish the work in accordance with the specifications and directions of the Engineer.

The prices bid shall include profit, overhead, tolls, expenses, travel time, supplies, tools and equipment required or used up on performing the archeology work and any other incidentals necessary to perform

and complete the Work in accordance with the specifications and to the satisfaction of the Resident Engineer.

Daily time sheets in duplicate must be filled out by the archeologist on the job describing the Work performed and time involved. These must be submitted to the Engineer and will be subject to verifications by him.

#### **500.8 BASIS OF PAYMENT**

**500.8.1: Fixed Sum Items:** The Contract price for this item shall be a lump sum price for the work performed under this item and shall be equal to the sum total of all vouchers submitted to the Contractor by archaeological contractor(s), as approved by the Engineer, for payment by the Contractor for the cost incurred, in providing the services of archaeological staff person and supervisors.

Payment under this item shall be made by the City on a reimbursement basis only for payments made by the Contractor to the archaeological contractor(s) for providing the services of archaeological staff person and supervisors and shall equal the total amount of invoices submitted by the archaeological contractor(s) and paid by the Contractor during the period for which a requisition is submitted. The Contractor shall be required to submit to the Engineer satisfactory evidence of payment for all archaeological staff person and supervisor services being requisitioned. No retainage will be withheld by the Agency on such payments made under this section.

The total estimated cost of this item is the "fixed sum" amount shown for this item in the Bid Schedule. No guarantee is given that the actual lump sum cost for this item will in fact be the "fixed sum" amount. The "fixed sum" amount is included in the total bid solely to insure that sufficient monies will be available to pay the Contractor for these services.

The Contractor shall maintain separate books of accounts and shall not charge any portion of the cost of **ARCHEOLOGICAL CONSERVATION, ARCHEOLOGICAL LAB AND FIELD TECHNICIAN, ARCHEOLOGICAL FINAL REPORT, PHYSICAL ANTHROPOLOGIST and/or PUBLIC EDUCATION PROGRAM** to another part of the work. Payment and partial payments under this item shall be treated separately from the rest of the contract items.

The voucher for payment shall be submitted to the Engineer on a monthly basis and shall include the signed copies of the daily reports.

The "fixed sum" is for bidding purposes only and shall not be varied in the bid. The Contractor will be paid for the actual amount regardless of the fixed sum, which may be more or less than the fixed amount.

**500.8.2 Person Hour Items:** The price bid shall be a unit price per **PERSON HOUR** for all time necessary to complete **ARCHEOLOGICAL TESTING, ARCHEOLOGICAL MONITORING**, performed on the job site and any conservation that may be required as well off site. The time paid will be a verifiable straight-time professional rate regardless of the number of hours on the on site or offsite on any day including weekends and nights. Verifiable on site hours shall be as determined by the Engineer. Verifiable off site hours shall be as determined by the Engineer, LPC, and the Agency. No overtime rates will be paid. No work shall be performed on legal holidays.

The estimated numbers of hours in the bid book are based on an assumed number of hours which will naturally vary from the actual number of hours required during the year. The Contractor will be paid only for actual hours worked on the job site as well as time needed for the following which may occur off site: process any archaeological resources that may be found, archaeological analysis, conservation and the preparation of the final report detailing all the archaeological work that has been completed and the City makes no guarantee as to the total number to be paid, under the Contract.

For all sub-contractor expenses of the professional services required under this contract, the Contractor shall be reimbursed for paid invoices plus a 5% general contractor fee.

**500.9 PAY ITEMS**

The following contract Pay Items shall apply:

<b>ITEM NO.</b>	<b>ITEM</b>	<b>UNIT</b>
500. AT	Archeological Testing	PERSON-HOUR
500. AM	Archeological Monitoring	PERSON-HOUR
500. AC	Archeological Conservation	FIXED SUM ALLOWANCE
500. AL	Archeological Lab And Field Technician	FIXED SUM ALLOWANCE
500. AFR	Archeological Final Report	FIXED SUM ALLOWANCE
500. PA	Physical Anthropologist	FIXED SUM ALLOWANCE
500. PE	Public Education Program	FIXED SUM ALLOWANCE

For the item **ALLOWANCE FOR ARCHEOLOGICAL CONSERVATION** a maximum allowance of **\$11,000.00** is hereby established.

For the item **ALLOWANCE FOR ARCHEOLOGICAL LAB AND FIELD TECHNICIAN** a maximum allowance of **\$11,000.00** is hereby established.

For the item **ALLOWANCE FOR ARCHEOLOGICAL FINAL REPORT** a maximum allowance of **\$22,000.00** is hereby established.

For the item **ALLOWANCE FOR PHYSICAL ANTHROPOLOGIST** a maximum allowance of **\$11,000.00** is hereby established.

For the item **ALLOWANCE FOR PUBLIC EDUCATION PROGRAM** a maximum allowance of **\$10,000.00** is hereby established.

SECTION A-060000

Building Architectural Work

1. Description. Under this item the Contractor shall perform all architectural work to renovate existing space in accordance with the plans, specifications, New York City Building Code and directions of the Engineer, including required demolition and removal of debris. The scope includes but is not limited to the following work in each building:

- A) Seaman's Cottage - Provide new windows, doors, basement stairway and door, concrete floor, floor drains, transformer pad, telephone and cable backboard and restore outside siding.
- B) Museum -- Provide transformer pad, cable backboard, and fill and restore outside facade and window well.
- C) Court House -- Remove partition wall and provide electrical equipment backboards and transformer pad, and fill and restore outside facade.
- D) PS 28- Remove existing sheetrock wall and door, reconstruct a new wall and doorway, provide a transformer pad, and fill and restore outside facade and roof soffit.
- E) Schwiebert House - Provide electrical panel backboard, relocate water line and install shutoff valve for outside water bib, and fill and restore outside facade.
- F) Bennett House -- Remove closet shelves and provides electrical panel backboard, and fill and restore outside facade.
- G) Transport Museum -- Provide electrical panel/ telephone and cable backboards, repair sheetrock wall at old pane location, and fill and restore outside facade, roof and soffit.
- H) Stephens-Prier Building -- Fill and restore outside facade and soffit.
- I) Guyon Store/Tavern -- Provide electrical panel backboard and fill and restore outside facade.
- J) New Dorp Railroad -- Reconstruct existing wall to support new electrical panel.

2. Materials. Match existing building materials and finishes.

3. Methods. Install all materials as shown on the plans and in accordance with NYC Building Code.

Provide final protection and maintain conditions that ensure coatings and finishes without damage or deterioration at time of Substantial Completion.

Coordinate wall and ceiling penetrations with other disciplines.

4. Restoration of Historic Structures. Prior to commencing any work on any historic structure, the Contractor shall submit for approval a narrative of a protocol discussing how each building type and condition will be restored when facilities are removed from the exterior of the structure. The Contractor's attention is directed to NYC Landmarks Commission (LPC) publication entitled, "*Restoring Architectural Features*" (2012), an application guideline for acceptable techniques for the repair of masonry and wood surfaces. The restoration methods shall be approved by the Engineer prior to commencing any final work may begin. The Engineer may, at any time at no cost to the City, require the Contractor to remove and redo any restoration work deemed in the opinion of the Engineer not to be in conformance with the guidelines and methodologies previously submitted and approved.

5. Samples. Submit catalog cuts of materials and finishes to be provided.

6. Measurement. The quantity to be measured for payment shall be lump sum per each building to be renovated, to the satisfaction of the Engineer.

7. Price to Cover. The contract price bid shall be a lump sum price per each building and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, all in accordance with the plans, the specifications, and directions of the Engineer.

Individual buildings will be paid under separate items.

Payment for Building Electrical Work will be made under:

Item No.	Item	Pay Unit
A-060000 A	BUILDING ARCHITECTURAL WORK – Seaman's Cottage	LUMP SUM
A-060000 B	BUILDING ARCHITECTURAL WORK – Museum	LUMP SUM
A-060000 C	BUILDING ARCHITECTURAL WORK – Court House	LUMP SUM
A-060000 D	BUILDING ARCHITECTURAL WORK – PS 28	LUMP SUM
A-060000 E	BUILDING ARCHITECTURAL WORK – Schwiebert House	LUMP SUM
A-060000 F	BUILDING ARCHITECTURAL WORK – Bennett House	LUMP SUM
A-060000 G	BUILDING ARCHITECTURAL WORK – Transport Museum	LUMP SUM
A-060000 H	BUILDING ARCHITECTURAL WORK – Stephens-Prier	LUMP SUM
A-060000 I	BUILDING ARCHITECTURAL WORK – Guyon Store/Tavern	LUMP SUM
A-060000 J	BUILDING ARCHITECTURAL WORK – New Dorp Railroad	LUMP SUM

SECTION C-271343

Telephone Cable

1. Description. Under this item the Contractor shall perform all electrical work to furnish and install telephone cable from the Verizon service point to each building on the site as noted on the plans with existing telephone equipment reconnected. The work shall be completed in accordance with the plans, specifications, New York City Electric Code and directions of the Engineer.

2. Materials. Furnish materials in compliance with NYC Electric Code and as shown on the Plans.

Telephone cable shall comply with ANSI / ICEA S-84-608-2007. The cable shall be 25 pair, 19AWG solid annealed copper with dual insulation.

Telephone cable shall be Superior Essex Part No. 09-031-02 or approved equal.

Telephone Punch-down blocks shall be provided where noted on the plans.

3. Methods. Installation shall be in compliance with NYC Electric Code and as shown on the Plans.

4. Samples. Submit catalog cuts of proposed telephone cable for review and approval by the Engineer.

5. Measurement. The quantity to be measured for payment shall be the linear feet of cable actually furnished and installed to the satisfaction of the Engineer.

6. Price to Cover. The contract price bid shall be a linear foot price and shall cover the cost of all labor, material, equipment, insurance and incidentals necessary to complete the work, all in accordance with the plans, the specifications, and directions of the Engineer. Punch-down Blocks shall be included in the price bid for the telephone cable.

Payment for Telephone Cable will be made under:

Item No.	Item	Pay Unit
C-271343	TELEPHONE CABLE	LINEAR FOOT

## SECTION E-260010

## Building Electrical Work

1. Description. Under this item the Contractor shall perform all electrical work within a given building in accordance with the plans, specifications, New York City Electric Code and directions of the Engineer. This work shall include but is not limited to; cable, conduit, fittings, connectors, boxes, panelboards, switches, meters, fuses, circuit breakers, controllers, time clocks, transformers, interior lighting, switches and receptacles. This work will also include any fire alarm equipment, heating and exhaust equipment, heat trace cable and hot box installation, along with the removal and or relocation of existing electrical equipment/ conduit and wiring within the buildings.

Refer to the attached 260010.XX subsections for additional information and system installation requirements:

- 260010.01 Medium-Voltage Cables
- 260010.02 Low-Voltage Electrical Power Conductors and Cables
- 260010.03 Grounding and Bonding for Electrical Systems
- 260010.04 Raceway and Boxes for Electrical Systems
- 260010.05 Identification for Electrical Systems
- 260010.06 Low-Voltage Transformers
- 260010.07 Panelboards
- 260010.08 Wiring Devices
- 260010.09 Enclosed Switches
- 260010.10 Fuses
- 260010.11 Fire Alarm Systems

2. Submittals. Product Data: For each type of electrical and fire alarm equipment identified, accessory, and other components indicated.

A. Shop Drawings: For each type of electrical, fire alarm and related equipment.

1) Dimensioned plans, elevations, sections, and details, including required clearances and service space around equipment. Show tabulations of installed devices, equipment features, and ratings.

2) Wiring Diagrams: Power, signal, and control wiring.

B. Catalog Cuts: For proposed electrical equipment for review and approval by the Engineer. The submittals shall include: conduit, cable, fittings, panelboards, switchboards, switches, fuses, transformers, ground rods, junction boxes, splice boxes, cabinets, enclosures, time clocks, contactors, meters, smoke detectors, and telephone panels and backboards.

C. Field quality-control test reports.

D. Operation and maintenance data.

3. Quality Assurance. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

A. Comply with NFPA 70

4. Warranty. Provide Manufacturer's Standard Warranty, which the manufacturer/contractor agrees to repair or replace devices that fail in materials or workmanship within specified warranty period.



5. Materials. Furnish materials in compliance with NYC Electric Code and as shown on the Equipment Schedules on the Contract Plans. Provide a selective coordination and short circuit study report for the main distribution system, along with documentation certifying all grounding and electrical test compliance.

6. Methods. Installation shall be in compliance with NYC Electric Code and as shown on the Plans.

Provide final protection and maintain conditions that ensure coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.

After completing installation of exposed factory finished raceways and boxes, inspect exposed finishes and repair damaged finishes.

Coordinate layout and installation of raceways, boxes, enclosures, cabinets, and suspension system with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, and partition assemblies.

7. Spare Parts. Provide extra material as noted in the specification subsections and on the plans.

8. Field Quality Control.

A. Acceptance Testing Preparation:

- 1) Test insulation resistance for each switchboard bus, component, connecting supply, feeder, and control circuit.
- 2) Test continuity of each circuit.

B. Tests and Inspections:

- 1) Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification. Certify compliance with test parameters.
- 2) Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest.
- 3) Test and adjust controls, remote monitoring, and safeties. Replace damaged and malfunctioning controls and equipment.
- 4) Infrared Scanning: After substantial complete, but not more than 60 days after Final Acceptance, the contractor is responsible for providing a Qualified 3rd party testing company perform an infrared scan of each panelboard and disconnect switch installed on the project, the testing shall be witnessed by the Resident Engineer and documented by the testing company in a Report for review approval and by the Engineer.

C. Equipment will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports, including a certified report that identifies all equipment included and that describes scanning results. Include notation of deficiencies detected, remedial action taken and observations after remedial action.

9. Training. The contractor shall provide for and arrange training the Owner, by the manufacturer's representative and or the certified installer, a minimum of two hours for each system (electrical, telephone, data/communication, and fire alarm and meter management) installed as part of this project, to the satisfaction of the Engineer.

10. Measurement. The quantity to be measured for payment shall be lump sum per each building to be renovated, to the satisfaction of the Engineer.

11. Price to Cover. The contract price bid shall be a lump sum price per each building and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, all in accordance with the plans, the specifications, subsection specifications, and directions of the Engineer.

Individual buildings will be paid under separate items.

Payment for Building Electrical Work will be made under:

Item No.	Item	Pay Unit
E-260010 A	BUILDING ELECTRICAL WORK - Seaman's Cottage	LUMP SUM
E-260010 B	BUILDING ELECTRICAL WORK - Museum	LUMP SUM
E-260010 C	BUILDING ELECTRICAL WORK - Court House	LUMP SUM
E-260010 D	BUILDING ELECTRICAL WORK - PS 28	LUMP SUM
E-260010 E	BUILDING ELECTRICAL WORK - Schwiebert House	LUMP SUM
E-260010 F	BUILDING ELECTRICAL WORK - Bennett House	LUMP SUM
E-260010 G	BUILDING ELECTRICAL WORK - Transport Museum	LUMP SUM
E-260010 H	BUILDING ELECTRICAL WORK - Shed 38	LUMP SUM
E-260010 I	BUILDING ELECTRICAL WORK - Stephens-Prier House	LUMP SUM
E-260010 J	BUILDING ELECTRICAL WORK - Guyon Store/Tavern	LUMP SUM
E-260010 K	BUILDING ELECTRICAL WORK - New Dorp Railroad	LUMP SUM
E-260010 L	BUILDING ELECTRICAL WORK - Colon Store/Tinsmith	LUMP SUM
E-260010 M	BUILDING ELECTRICAL WORK - General Store	LUMP SUM
E-260010 N	BUILDING ELECTRICAL WORK - Print Shop	LUMP SUM
E-260010 O	BUILDING ELECTRICAL WORK - Carpenter Shop	LUMP SUM

SUBSECTION 260010.01

Medium-Voltage Cables

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Medium voltage cable.
  - 2. Cable terminations.
  - 3. Fireproofing tape.
  - 4. Underground cable markers.
  - 5. Bedding and cover materials.

**1.02 REFERENCES**

- A. International Electrical Testing Association:
  - 1. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.
- B. Consolidated Edison: Blue Book Specifications.

**1.03 SUBMITTALS**

- A. Product Data: Submit for cable, terminations, and accessories.
- B. Test Reports: Indicate results of cable test in tabular form and in plots of current versus voltage for incremental voltage steps, and current versus time at 30 second intervals at maximum voltage.

**1.04 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual sizes and locations of cables.
- B. Operation and Maintenance Data: Submit instructions for testing and cleaning cable and accessories.

**1.05 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing products specified in this section with a minimum three years of experience.

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Protect cable ends from entrance of moisture.

**PART 2. - PRODUCTS**

**2.01 MEDIUM VOLTAGE CABLE**

- A. As per Con Edison specifications.
- B. Insulation Level: 100 percent of operating voltage.
- C. Cable Continuous Operating Temperature Rating: MV-105.
- D. Configuration: Single conductor.
- E. Voltage: 13.8 kV.
- F. Conductor Construction: Compact stranded.
- G. Conductor Shield: Foil.
- H. Identification stripe.

**2.02 CABLE TERMINATIONS**

- A. As per Con Edison specifications.

**2.03 UNDERGROUND CABLE MARKERS**

- A. Furnish materials in accordance with Con Edison standards.

**2.04 BEDDING AND COVER MATERIALS**

- A. As per Con Edison Standards.

**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Coordination and project conditions.
- B. Verify excavations are to required grade, dry, and not over-excavated.
- C. Verify conduit and manholes are ready to receive cable.
- D. Verify routing and termination locations of cable prior to rough-in.

**3.02 PREPARATION**

- A. Use swab to clean conduits before pulling cables.

**3.03 INSTALLATION**

- A. Install Work in accordance with Con Edison specifications.

**3.04 FIELD QUALITY CONTROL**

- A. Field inspecting, testing, adjusting, and balancing.
- B. Inspect exposed cable sections for physical damage.
- C. Inspect cable for proper connections.
- D. Inspect shield grounding, cable supports, and terminations for proper installation.
- E. Inspect and test in accordance with NETA ATS, except Section 4.
- F. Perform inspections and tests listed in NETA ATS, Section 7.3.

**3.05 PROTECTION OF INSTALLED CONSTRUCTION**

- A. Protecting installed construction.
- B. Protect installed cables from entrance of moisture.

SUBSECTION 260010.02

Low-Voltage Electrical Power Conductors And Cables

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section includes building wire and cable; nonmetallic-sheathed cable; direct burial cable; service entrance cable; armored cable; metal clad cable; and wiring connectors and connections.

**1.02 REFERENCES**

- A. International Electrical Testing Association:
  - 1. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.
- B. National Fire Protection Association:
  - 1. NFPA 70 - National Electrical Code.

**1.03 SYSTEM DESCRIPTION**

- A. Product Requirements: Provide products as follows:
  - 1. Solid conductor for feeders and branch circuits 10 AWG and smaller.
  - 2. Stranded conductors for control circuits.
  - 3. Conductor not smaller than 12 AWG for power and lighting circuits.
  - 4. Conductor not smaller than 14 AWG for control circuits.
  - 5. Increase wire size in branch circuits to limit voltage drop to a maximum of 3 percent.
- B. Wiring Methods: Provide the following wiring methods:
  - 1. Service Entrance: Use only Type RHW-2/USE-2 insulation in raceway.
  - 2. Feeder and Branch Circuits (Exterior Locations): Use only Type XHHW-2 insulation in raceway.
  - 3. Feeder and Branch Circuits (Interior Locations): Use only Type THHN/THWN-2 insulation in raceway.

**1.04 SUBMITTALS**

- A. Product Data: Submit for each cable type.
- B. Test Reports: Indicate procedures and values obtained.

**1.05 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual locations of components and circuits.

1.06 **QUALITY ASSURANCE**

- A. Perform Work in accordance with New York State and New York City standards.
- B. Maintain one copy of each document on site.

1.07 **QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years' experience.

1.08 **FIELD MEASUREMENTS**

- A. Verify field measurements are as indicated on Drawings.

1.09 **COORDINATION**

- A. Where wire and cable destination is indicated and routing is not shown, determine routing and lengths required.
- B. Wire and cable routing indicated is approximate unless dimensioned.

**PART 2. - PRODUCTS**

2.01 **SERVICE ENTRANCE CABLE**

- A. Conductor: Copper.
- B. Insulation Voltage Rating: 600 volts.
- C. Insulation Temperature Rating: 90 degrees C.
- D. Insulation: Type RHW-2/USE-2.

2.02 **EXTERIOR CABLE**

- A. Conductor: Copper.
- B. Insulation Voltage Rating: 600 volts.
- C. Insulation Temperature Rating: 90 degrees C.
- D. Insulation: Type XHHW-2.

2.03 **INTERIOR CABLE**

- A. Conductor: Copper.
- B. Insulation Voltage Rating: 600 volts.
- C. Insulation Temperature Rating: 90 degrees C.
- D. Insulation: Type THHN/THWN-2.

2.04 **TERMINATIONS**

- A. Terminal Lugs for Wires 6 AWG and Smaller: Solderless, compression type copper.
- B. Lugs for Wires 4 AWG and Larger: Color keyed compression type copper, with insulating sealing collars.

**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Verify interior of building has been protected from weather.
- B. Verify mechanical work likely to damage wire and cable has been completed.
- C. Verify raceway installation is complete and supported.

**3.02 PREPARATION**

- A. Completely and thoroughly swab raceway before installing wire.

**3.03 EXISTING WORK**

- A. Remove exposed abandoned wire and cable. Patch surfaces where removed cables pass through building finishes.
- B. Disconnect abandoned circuits and remove circuit wire and cable. Remove abandoned boxes when wire and cable servicing boxes is abandoned and removed. Install blank cover for abandoned boxes not removed.
- C. Provide access to existing wiring connections remaining active and requiring access. Modify installation or install access panel.
- D. Extend existing circuits using materials and methods as specified.
- E. Clean and repair existing wire and cable remaining or wire and cable to be reinstalled.

**3.04 INSTALLATION**

- A. Route wire and cable to meet Project conditions.
- B. Neatly train and lace wiring inside boxes, equipment, and panelboards.
- C. Identify and color code wire and cable under provisions of Section 26 05 53. Identify each conductor with its circuit number or other designation indicated.
- D. Special Techniques - Cable in Raceway:
  - 1. Pull conductors into raceway at same time.
  - 2. Install building wire 4 AWG and larger with pulling equipment.
  - 3. Use suitable direct burial cable fittings and connectors.
- E. Special Techniques - Wiring Connections:
  - 1. Clean conductor surfaces before installing lugs and connectors.
  - 2. Make splices, taps, and terminations to carry full ampacity of conductors with no perceptible temperature rise.
  - 3. Tape uninsulated conductors and connectors with electrical tape to 150 percent of insulation rating of conductor.
  - 4. Install split bolt connectors for copper conductor splices and taps, 6 AWG and larger.
  - 5. Install solderless pressure connectors with insulating covers for copper conductor splices and taps, 8 AWG and smaller.



- F. Install solid conductors for branch circuits 10 AWG and smaller. Install crimp on fork terminals for device terminations. Do not place bare stranded conductors directly under screws.
- G. Install terminal lugs on ends of 600 volt wires unless lugs are furnished on connected device, such as circuit breakers.
- H. Size lugs in accordance with manufacturer's recommendations terminating wire sizes. Install 2-hole type lugs to connect wires 4 AWG and larger to copper bus bars.
- I. For terminal lugs fastened together such as on motors, transformers, and other apparatus, or when space between studs is small enough that lugs can turn and touch each other, insulate for dielectric strength of 2-1/2 times normal potential of circuit.

### 3.05 WIRE COLOR

- A. General:
  - 1. For wire sizes 10 AWG and smaller, install wire colors in accordance with the following:
    - a. Black and red for single phase circuits at 120/240 volts.
    - b. Black, red, and blue for circuits at 120/208 volts single or three phase.
    - c. Orange, brown, and yellow for circuits at 277/480 volts single or three phase.
  - 2. For wire sizes 8 AWG and larger, identify wire with colored tape at terminals, splices and boxes. Colors are as follows:
    - a. Black and red for single phase circuits at 120/240 volts.
    - b. Black, red, and blue for circuits at 120/208 volts single or three phase.
    - c. Orange, brown, and yellow for circuits at 277/480 volts single or three phase.
- B. Neutral Conductors: White. When two or more neutrals are located in one conduit, individually identify each with proper circuit number.
- C. Branch Circuit Conductors: Install three or four wire home runs with each phase uniquely color coded.
- D. Feeder Circuit Conductors: Uniquely color code each phase.
- E. Ground Conductors:
  - 1. For 6 AWG and smaller: Green.
  - 2. For 4 AWG and larger: Identify with green tape at both ends and visible points including junction boxes.

### 3.06 FIELD QUALITY CONTROL

- A. Inspect and test in accordance with NETA ATS, except Section 4.
- B. Perform inspections and tests listed in NETA ATS, Section 7.3.1.

SUBSECTION 260010.03

Grounding And Bonding For Electrical Systems

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Rod electrodes.
  - 2. Active electrodes.
  - 3. Wire.
  - 4. Grounding well components.
  - 5. Mechanical connectors.
  - 6. Exothermic connections.

**1.02 REFERENCES**

- A. Institute of Electrical and Electronics Engineers:
  - 1. IEEE 142 - Recommended Practice for Grounding of Industrial and Commercial Power Systems.
- B. International Electrical Testing Association:
  - 1. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.
- C. National Fire Protection Association:
  - 1. NFPA 70 - National Electrical Code.

**1.03 SYSTEM DESCRIPTION**

- A. Grounding systems use the following elements as grounding electrodes:
  - 1. Metal underground water pipe.
  - 2. Metal building frame.
  - 3. Rod electrode.

**1.04 PERFORMANCE REQUIREMENTS**

- A. Grounding System Resistance: 25 ohms maximum.

**1.05 SUBMITTALS**

- A. Product Data: Submit data on grounding electrodes and connections.
- B. Test Reports: Indicate overall resistance to ground.
- C. Manufacturer's Installation Instructions: Submit for active electrodes.

**1.06 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual locations of components and grounding electrodes.

**1.07 QUALITY ASSURANCE**

- A. Provide grounding materials conforming to requirements of NEC, IEEE 142, and UL labeled.
- B. Perform Work in accordance with New York State and New York City standards.
- C. Maintain one copy of each document on site.

**1.08 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing Products specified in this section with minimum three years experience.
- B. Installer: Company specializing in performing work of this section with minimum 3 years experience.

**1.09 DELIVERY, STORAGE, AND HANDLING**

- A. Accept materials on site in original factory packaging, labeled with manufacturer's identification.
- B. Protect from weather and construction traffic, dirt, water, chemical, and mechanical damage, by storing in original packaging.
- C. Do not deliver items to project before time of installation. Limit shipment of bulk and multiple-use materials to quantities needed for immediate installation.

**1.10 COORDINATION**

- A. Section 01 30 00 - Administrative Requirements: Requirements for coordination.

**PART 2. - PRODUCTS**

**2.01 ROD ELECTRODES**

- A. Product Description:
  - 1. Material: Copper-clad steel.
  - 2. Diameter: 3/4 inch.
  - 3. Length: 10 feet.
- B. Connector: Connector for exothermic welded connection.

**2.02 WIRE**

- A. Material: Stranded copper.
- B. Foundation Electrodes: 4 AWG.
- C. Grounding Electrode Conductor: Copper conductor insulated.
- D. Bonding Conductor: Copper conductor insulated.

**2.03 EXOTHERMIC CONNECTIONS**

- A. Product Description: Exothermic materials, accessories, and tools for preparing and making permanent field connections between grounding system components.

**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Verify final backfill and compaction has been completed before driving rod electrodes.

**3.02 PREPARATION**

- A. Remove paint, rust, mill oils and surface contaminants at connection points.

**3.03 EXISTING WORK**

- A. Modify existing grounding system to maintain continuity to accommodate renovations.
- B. Extend existing grounding system using materials and methods as specified.

**3.04 INSTALLATION**

- A. Install in accordance with IEEE 142.
- B. Install rod electrodes at locations as indicated on Drawings. Install additional rod electrodes to achieve specified resistance to ground.
- C. Install grounding and bonding conductors concealed from view.
- D. Equipment Grounding Conductor: Install separate, insulated conductor within each feeder and branch circuit raceway. Terminate each end on suitable lug, bus, or bushing.
- E. Install continuous grounding using underground cold water system and building steel as grounding electrode. Where water piping is not available, install artificial station ground by means of driven rods or buried electrodes.
- F. Accomplish grounding of electrical system by using insulated grounding conductor installed with feeders and branch circuit conductors in conduits. Size grounding conductors in accordance with NEC. Install from grounding bus of serving panel to ground bus of served panel, grounding screw of receptacles, lighting fixture housing, light switch outlet boxes or metal enclosures of service equipment. Ground metal conduits by means of grounding bushings on terminations at panelboards with installed number 12 conductor to grounding bus.

**3.05 FIELD QUALITY CONTROL**

- A. Grounding and Bonding: Perform inspections and tests listed in NETA ATS, Section 7.13.
- B. Perform ground resistance testing in accordance with IEEE 142.
- C. Perform continuity testing in accordance with IEEE 142.
- D. When improper grounding is found on new receptacles, check new receptacles in entire project and correct. Perform retest.

## SUBSECTION 260010.04

## Raceway And Boxes For Electrical Systems

**PART 1. - GENERAL****1.01 SUMMARY**

- A. Section includes conduit and tubing, surface raceways, wireways, outlet boxes, pull and junction boxes, and handholes.

**1.02 REFERENCES**

- A. American National Standards Institute:
  - 1. ANSI C80.1 - Rigid Steel Conduit, Zinc Coated.
  - 2. ANSI C80.3 - Specification for Electrical Metallic Tubing, Zinc Coated.
- B. National Electrical Manufacturers Association:
  - 1. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
  - 2. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit and Cable Assemblies.
  - 3. NEMA OS 1 - Sheet Steel Outlet Boxes, Device Boxes, Covers, and Box Supports.
  - 4. NEMA TC 2 - Electrical Polyvinyl Chloride (PVC) Tubing and Conduit.
  - 5. NEMA TC 3 - PVC Fittings for Use with Rigid PVC Conduit and Tubing.

**1.03 SYSTEM DESCRIPTION**

- A. Raceway and boxes located as indicated on Drawings, and at other locations required for splices, taps, wire pulling, equipment connections, and compliance with regulatory requirements. Raceway and boxes are shown in approximate locations unless dimensioned. Provide raceway to complete wiring system.
- B. Underground More than 5 feet outside Foundation Wall: Provide thin-wall nonmetallic conduit. Provide concrete or polymer concrete handholes and manholes as shown on drawings.
- C. Underground within 5 feet from Foundation Wall: Provide rigid steel conduit. Provide concrete or polymer concrete handholes and manholes as shown on drawings.
- D. In or Under Slab on Grade: Provide rigid steel conduit.
- E. Outdoor Locations, Above Grade: Provide rigid steel conduit. Provide cast metal outlet, pull, and junction boxes.
- F. In Slab above Grade: Provide rigid steel conduit. Provide cast boxes.
- G. Wet and Damp Locations: Provide rigid steel conduit. Provide cast metal, junction, and pull boxes. Provide flush mounting outlet box in finished areas.
- H. Concealed Dry Locations: Provide electrical metallic tubing. Provide sheet-metal boxes. Provide flush mounting outlet box in finished areas. Provide hinged enclosure for large pull boxes.

- I. Exposed Dry Locations: Provide electrical metallic tubing. Provide sheet-metal boxes. Provide flush mounting outlet box in finished areas. Provide hinged enclosure for large pull boxes.

**1.04 DESIGN REQUIREMENTS**

- A. Minimum Raceway Size: 3/4 inch unless otherwise specified.

**1.05 SUBMITTALS**

- A. Product Data: Submit for the following:
  - 1. Flexible metal conduit.
  - 2. Liquid tight flexible metal conduit.
  - 3. Nonmetallic conduit.
  - 4. Raceway fittings.
  - 5. Conduit bodies.
  - 6. Surface raceway.
  - 7. Pull and junction boxes.
  - 8. Handholes.
- B. Manufacturer's Installation Instructions: Submit application conditions and limitations of use stipulated by Product testing agency specified under Regulatory Requirements. Include instructions for storage, handling, protection, examination, preparation, and installation of Product.

**1.06 CLOSEOUT SUBMITTALS**

- A. Project Record Documents:
  - 1. Record actual routing of conduits 2" and larger.

**1.07 DELIVERY, STORAGE, AND HANDLING**

- A. Protect conduit from corrosion and entrance of debris by storing above grade. Provide appropriate covering.
- B. Protect PVC conduit from sunlight.

**1.08 COORDINATION**

- A. Coordinate mounting heights, orientation and locations of outlets mounted above counters, benches, and backsplashes.

**PART 2. - PRODUCTS**

**2.01 METAL CONDUIT**

- A. Rigid Steel Conduit: ANSI C80.1.
- B. Fittings and Conduit Bodies: NEMA FB 1; material to match conduit.

**2.02 FLEXIBLE METAL CONDUIT**

- A. Product Description: Interlocked steel construction.
- B. Fittings: NEMA FB 1.

**2.03 LIQUIDTIGHT FLEXIBLE METAL CONDUIT**

- A. Product Description: Interlocked steel construction with PVC jacket.
- B. Fittings: NEMA FB 1.

**2.04 ELECTRICAL METALLIC TUBING (EMT)**

- A. Product Description: ANSI C80.3; galvanized tubing.
- B. Fittings and Conduit Bodies: NEMA FB 1; steel compression type.

**2.05 NONMETALLIC CONDUIT**

- A. Product Description: NEMA TC 2; Schedule 40 PVC.
- B. Fittings and Conduit Bodies: NEMA TC 3.

**2.06 SURFACE METAL RACEWAY**

- A. Product Description: Sheet metal channel with fitted cover, suitable for use as surface metal raceway.
- B. Finish: Gray.
- C. Fittings, Boxes, and Extension Rings: Furnish manufacturer's standard accessories; match finish on raceway.

**2.07 OUTLET BOXES**

- A. Sheet Metal Outlet Boxes: NEMA OS 1, galvanized steel.
  - 1. Luminaire and Equipment Supporting Boxes: Rated for weight of equipment supported; furnish 1/2 inch male fixture studs where required.
  - 2. Concrete Ceiling Boxes: Concrete type.
- B. Cast Boxes: NEMA FB 1, Type FD, cast ferroalloy. Furnish gasketed cover by box manufacturer. Furnish threaded hubs.
- C. Wall Plates for Unfinished Areas: Furnish gasketed cover.

**2.08 PULL AND JUNCTION BOXES**

- A. Sheet Metal Boxes: NEMA OS 1, galvanized steel.
- B. Surface Mounted Cast Metal Box: NEMA 250, Type 4X; flat-flanged, surface mounted junction box:
  - 1. Material: Galvanized cast iron.
  - 2. Cover: Hinged. Furnish with ground flange, neoprene gasket, and stainless steel cover screws.

- C. Flush Mounted Cast Metal Box: NEMA 250, Type 4X; flat-flanged, flush mounted junction box:
  - 1. Material: Galvanized cast iron.
  - 2. Cover: Furnish with ground flange, neoprene gasket, and stainless steel cover screws.

**2.09 HANDHOLES**

- A. In-Ground Concrete Handholes: As per NYC DPR standards.
- B. In-Ground Polymer Concrete Handholes:
  - 1. Cover: Nonskid cover with neoprene gasket and stainless steel cover screws.
  - 2. Cover Legend: "ELECTRIC" for Electrical handholes.
    - a. "ELECTRIC" for electrical handholes.
    - b. "LIGHTING" for lighting handholes.
    - c. "TELEPHONE" for telephone handholes.
    - d. "CABLE" for cable/data handholes.

**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Verify outlet locations and routing and termination locations of raceway prior to rough-in.

**3.02 EXISTING WORK**

- A. Remove exposed abandoned raceway, including abandoned raceway above accessible ceiling finishes. Cut raceway flush with walls and floors, and patch surfaces.
- B. Remove concealed abandoned raceway to its source.
- C. Disconnect abandoned outlets and remove devices. Remove abandoned outlets when raceway is abandoned and removed. Install blank cover for abandoned outlets not removed.
- D. Maintain access to existing boxes and other installations remaining active and requiring access. Modify installation or provide access panel.
- E. Extend existing raceway and box installations using materials and methods as specified.
- F. Clean and repair existing raceway and boxes to remain or to be reinstalled.

**3.03 INSTALLATION**

- A. Ground and bond raceway and boxes.
- B. Fasten raceway and box supports to structure and finishes.
- C. Identify raceway and boxes.
- D. Arrange raceway and boxes to maintain headroom and present neat appearance.



**3.04 INSTALLATION - RACEWAY**

- A. Raceway routing is shown in approximate locations unless dimensioned. Route to complete wiring system.
- B. Arrange raceway supports to prevent misalignment during wiring installation.
- C. Support raceway using coated steel or malleable iron straps, lay-in adjustable hangers, clevis hangers, and split hangers.
- D. Group related raceway; support using conduit rack. Construct rack using steel channel; provide space on each for 25 percent additional raceways.
- E. Do not support raceway with wire or perforated pipe straps. Remove wire used for temporary supports
- F. Do not attach raceway to ceiling support wires or other piping systems.
- G. Construct wireway supports from steel channel.
- H. Route exposed raceway parallel and perpendicular to walls.
- I. Route raceway installed above accessible ceilings parallel and perpendicular to walls.
- J. Route conduit in and under slab from point-to-point.
- K. Maximum Size Conduit in Slab above Grade: 3/4 inch. Do not cross conduits in slab larger than 1/2 inch.
- L. Maintain clearance between raceway and piping for maintenance purposes.
- M. Maintain 12 inch clearance between raceway and surfaces with temperatures exceeding 104 degrees F.
- N. Cut conduit square using saw or pipe cutter; de-burr cut ends.
- O. Bring conduit to shoulder of fittings; fasten securely.
- P. Join nonmetallic conduit using cement as recommended by manufacturer. Wipe nonmetallic conduit dry and clean before joining. Apply full even coat of cement to entire area inserted in fitting. Allow joint to cure for minimum 20 minutes.
- Q. Install conduit hubs to fasten conduit to cast boxes.
- R. Install no more than equivalent of three 90 degree bends between boxes. Install conduit bodies to make sharp changes in direction, as around beams. Install factory elbows for bends in metal conduit larger than 2 inch size.
- S. Avoid moisture traps; install junction box with drain fitting at low points in conduit system.
- T. Install fittings to accommodate expansion and deflection where raceway crosses expansion joints.
- U. Install suitable pull string or cord in each empty raceway except sleeves and nipples.
- V. Install suitable caps to protect installed conduit against entrance of dirt and moisture.
- W. Surface Raceway: Install flat-head screws, clips, and straps to fasten raceway channel to surfaces; mount plumb and level. Install insulating bushings and inserts at connections to outlets and corner fittings.

- X. Close ends and unused openings in wireway.

3.05 **INSTALLATION - BOXES**

- A. Install wall mounted boxes at elevations to accommodate mounting heights specified in section for outlet device.
- B. Orient boxes to accommodate wiring devices oriented.
- C. Install pull boxes and junction boxes above accessible ceilings and in unfinished areas only.
- D. In Accessible Ceiling Areas: Install outlet and junction boxes no more than 6 inches from ceiling access panel or from removable recessed luminaire.
- E. Do not install flush mounting box back-to-back in walls; install with minimum 6 inches separation. Install with minimum 24 inches separation in acoustic rated walls.
- F. Secure flush mounting box to interior wall and partition studs. Accurately position to allow for surface finish thickness.
- G. Install stamped steel bridges to fasten flush mounting outlet box between studs.
- H. Install flush mounting box without damaging wall insulation or reducing its effectiveness.
- I. Do not fasten boxes to ceiling support wires or other piping systems.
- J. Support boxes independently of conduit.
- K. Install gang box where more than one device is mounted together. Do not use sectional box.
- L. Install gang box with plaster ring for single device outlets.

3.06 **INTERFACE WITH OTHER PRODUCTS**

- A. Locate outlet boxes to allow luminaires positioned as indicated on Drawings.
- B. Align adjacent wall mounted outlet boxes for switches, thermostats, and similar devices.

3.07 **ADJUSTING**

- A. Adjust flush-mounting outlets to make front flush with finished wall material.
- B. Install knockout closures in unused openings in boxes.

3.08 **CLEANING**

- A. Clean interior of boxes to remove dust, debris, and other material.
- B. Clean exposed surfaces and restore finish.

SUBSECTION 260010.05

Identification For Electrical Systems

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Nameplates.
  - 2. Labels.
  - 3. Wire markers.
  - 4. Conduit markers.
  - 5. Stencils.
  - 6. Underground Warning Tape.
  - 7. Lockout Devices.

**1.02 SUBMITTALS**

- A. Product Data:
  - 1. Submit manufacturer's catalog literature for each product required.
  - 2. Submit electrical identification schedule including list of wording, symbols, letter size, color coding, tag number, location, and function.
- B. Manufacturer's Installation Instructions: Indicate installation instructions, special procedures, and installation.

**1.03 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual locations of tagged devices; include tag numbers.

**1.04 QUALITY ASSURANCE**

- A. Perform Work in accordance New York State and New York City standards.

**1.05 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing Products specified in this section with minimum three years of experience.

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Accept identification products on site in original containers. Inspect for damage.
- B. Accept materials on site in original factory packaging, labeled with manufacturer's identification, including product density and thickness.
- C. Protect insulation from weather and construction traffic, dirt, water, chemical, and mechanical damage, by storing in original wrapping.

**1.07 ENVIRONMENTAL REQUIREMENTS**

- A. Install labels only when ambient temperature and humidity conditions for adhesive are within range recommended by manufacturer.

**1.08 EXTRA MATERIALS**

- A. Requirements for extra materials: as noted on the plans in the specifications.

**PART 2. - PRODUCTS**

**2.01 NAMEPLATES**

- A. Product Description: Laminated three-layer plastic with engraved black letters on white background color.
- B. Letter Size:
  - 1. 1/4 inch high letters for identifying grouped equipment and loads.
- C. Minimum nameplate thickness: 1/8 inch

**2.02 LABELS**

- A. Labels: Embossed adhesive tape, with 3/16 inch white letters on black background.

**2.03 WIRE MARKERS**

- A. Description: Cloth tape type wire markers.
- B. Legend:
  - 1. Power and Lighting Circuits: Branch circuit or feeder number as indicated on Drawings.

**2.04 CONDUIT AND RACEWAY MARKERS**

- A. Description: Labels fastened with adhesive or stencils.
- B. Color:
  - 1. Medium Voltage System: White lettering on red background.
  - 2. 480 Volt System: Red lettering on white background.
  - 3. 208 Volt System: Black lettering on white background.
  - 4. 240 Volt System: Black lettering on white background.
  - 5. Telephone System: Black lettering on orange background.
  - 6. Cable System: Black lettering on brown background.
- C. Legend:
  - 1. Medium Voltage System: HIGH VOLTAGE – 13.8kV.
  - 2. 480 Volt System: 480 VOLTS.
  - 3. 240 Volt System: 240 VOLTS.

4. 208 Volt System: 208 VOLTS.
5. Telephone System: TELE.
6. Cable System: CATV.

**2.05 STENCILS**

- A. Stencils: With clean cut symbols and letters of following size:
  1. Up to 2 inches Outside Diameter of Raceway: 1/2 inch high letters.
  2. 2-1/2 to 6 inches Outside Diameter of Raceway: 1 inch high letters.
- B. Stencil Paint: semi-gloss enamel, colors conforming to the following:
  1. Medium Voltage System: White lettering on red background.
  2. 480 Volt System: Red lettering on white background.
  3. 208 Volt System: Black lettering on white background.
  4. 240 Volt System: Black lettering on white background.
  5. Telephone System: Black lettering on orange background.
  6. Cable System: Black lettering on brown background.

**2.06 UNDERGROUND WARNING TAPE**

- A. Description: 4 inch wide plastic tape, detectable type, colored red with suitable warning legend describing buried electrical lines.

**PART 3. - EXECUTION**

**3.01 PREPARATION**

- A. Degrease and clean surfaces to receive adhesive for identification materials.

**3.02 EXISTING WORK**

- A. Install identification on existing equipment to remain in accordance with this section.
- B. Replace lost nameplates and labels.

**3.03 INSTALLATION**

- A. Install identifying devices after completion of painting.
- B. Nameplate Installation:
  1. Install nameplate parallel to equipment lines.
  2. Install nameplate for each electrical distribution and control equipment enclosure with corrosive-resistant mechanical fasteners, or adhesive.
  3. Install nameplates for each control panel and major control components located outside panel with corrosive-resistant mechanical fasteners, or adhesive.
  4. Secure nameplate to equipment front using adhesive.

5. Secure nameplate to inside surface of door on recessed panelboard in finished locations.
  6. Install nameplates for the following:
    - a. Switchboards.
    - b. Panelboards.
    - c. Transformers.
    - d. Disconnect Switches.
- C. Label Installation:
1. Install label parallel to equipment lines.
  2. Install label for identification of individual control device stations.
  3. Install labels for permanent adhesion and seal with clear lacquer.
- D. Wire Marker Installation:
1. Install wire marker for each conductor at panelboard gutters; pull boxes, outlet and junction boxes.
  2. Mark data cabling at each end. Install additional marking at accessible locations along the cable run.
  3. Install labels at data outlets identifying patch panel and port designation.
- E. Conduit Marker Installation:
1. Install conduit marker for each conduit longer than 6 feet.
  2. Conduit Marker Spacing: 20 feet on center.
  3. Raceway Painting:
    - a. Paint colored band on each conduit longer than 6 feet.
    - b. Paint bands 20 feet on center.
    - c. Color:
- F. Stencil Installation:
1. Apply stencil painting:
    - a. Paint stencils on each conduit longer than 6 feet.
    - b. Paint stencils 20 feet on center.
- G. Underground Warning Tape Installation:
1. Install underground warning tape along length of each underground conduit, raceway, or cable 12 inches below finished grade, directly above buried conduit, raceway, or cable.

SECTION 200010.06  
Low-Voltage Transformers

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Energy Efficient General Purpose Distribution Copper Wound Transformers.

**1.02 REFERENCE STANDARDS**

- A. National Electrical Manufacturers Association:
  - 1. NEMA ST 20 - Dry Type Transformers for General Applications.
- B. International Electrical Testing Association:
  - 1. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.

**1.03 SUBMITTALS**

- A. Product Data: Submit outline and support point dimensions of enclosures and accessories, unit weight, voltage, kVA, and impedance ratings and characteristics, tap configurations, insulation system type, and rated temperature rise.
- B. Test and Evaluation Reports: Indicate loss data, efficiency at 25, 50, 75 and 100 percent rated load, and sound level.
- C. Source Quality Control Submittals: Indicate results of factory tests and inspections.
- D. Field Quality Control Submittals: Indicate results of Contractor furnished tests and inspections.

**1.04 CLOSEOUT SUBMITTALS**

- A. Record Documentation: Record actual locations of transformers.

**1.05 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years of experience.

**1.06 DELIVERY, STORAGE, AND HANDLING**

- A. Store in clean, dry space. Maintain factory wrapping or provide additional canvas or plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle in accordance with manufacturer's written instructions. Lift only with lugs provided. Handle carefully to avoid damage to transformer internal components, enclosure, and finish.

**PART 2. - PRODUCTS****2 01 TRANSFORMERS**

- A Description: NEMA ST 20, factory-assembled, air-cooled, dry type transformers, ratings as indicated on Drawings.
- B Operation:
1. Primary Voltage: 480 volts, 3 phase
  2. Secondary Voltage: 208Y/120 volts, 3 phase
  3. Insulation system and average winding temperature rise for rated kVA as follows:
  4. 1-15 kVA: Class 185 with 115 degrees C rise
  5. 16-500 kVA: Class 220 with 150 degrees C rise
  6. Case temperature: Do not exceed 35 degrees C rise above ambient at warmest point at full load
  7. Winding Taps
    - a. Transformers Less than 15 kVA: Two 5 percent below rated voltage, full capacity taps on primary winding
    - b. Transformers 15 kVA and Larger: NEMA ST 20
  8. Sound Levels: NEMA ST 20
  9. Basic Impulse Level: 10 kV
  10. Mounting
    - a. 1-15 kVA: Suitable for wall mounting
    - b. 16-75 kVA: Suitable for wall, floor, or trapeze mounting
    - c. Larger than 75 kVA: Suitable for floor or trapeze mounting
- C Materials:
1. Ground core and coil assembly to enclosure by means of visible flexible copper grounding strap
  2. Coil Conductors: Continuous copper aluminum windings with terminations brazed or welded
  3. Enclosure: NEMA ST 20, Type 1 ventilated. Furnish lifting eyes or brackets
- D Fabrication
1. Isolate core and coil from enclosure using vibration-absorbing mounts
  2. Nameplate: Include transformer connection data and overload capacity based on rated allowable temperature rise

**2 02 SOURCE QUALITY CONTROL**

- A Production tests each unit according to NEMA ST20



**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Verify mounting supports are properly sized and located including concealed bracing in walls.

**3.02 PREPARATION**

- A. Provide concrete pads.

**3.03 DEMOLITION**

- A. Maintain access and adequate ventilation to existing transformers and other installations remaining active and requiring access and ventilation. Modify installation or provide access panel or ventilation grilles.

**3.04 INSTALLATION**

- A. Set transformer plumb and level.
- B. Use flexible conduit, 2 feet minimum length, for connections to transformer case. Make conduit connections to side panel of enclosure.
- C. Support transformers.
  - 1. Mount floor-mounted transformers on vibration isolating pads suitable for isolating transformer noise from building structure.
- D. Provide seismic restraints.
- E. Install grounding and bonding.

**3.05 FIELD QUALITY CONTROL**

- A. Inspect and test in accordance with NETA ATS, except Section 4.
- B. Perform inspections and tests listed in NETA ATS, Section 7.2.1.

**3.06 ADJUSTING**

- A. Measure primary and secondary voltages and make appropriate tap adjustments.

SUBSECTION 260010 07

Panelboards

**PART 1. - GENERAL**

**1 01 SUMMARY**

**A Section Includes:**

- 1 Distribution and branch circuit panelboards
- 2 Load centers

**1 02 REFERENCE STANDARDS**

**A Institute of Electrical and Electronics Engineers**

- 1 IEEE C62 41 - Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

**B National Electrical Manufacturers Association**

- 1 NEMA FU 1 - Low Voltage Cartridge Fuses
- 2 NEMA KS 1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum)
- 3 NEMA PB 1 - Panelboards
- 4 NEMA PB 1.1 - General Instructions for Proper Installation, Operation, and Maintenance of Panelboards Rated 600 Volts or Less

**C International Electrical Testing Association**

- 1 NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems

**D National Fire Protection Association:**

- 1 NFPA 70 - National Electrical Code

**E Underwriters Laboratories Inc**

- 1 UL 50 - Cabinets and Boxes
- 2 UL 67 - Safety for Panelboards
- 3 UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures
- 4 UL 1449 - Transient Voltage Surge Suppressors

**1 03 SUBMITTALS**

**A Product Data** Submit catalog data showing specified features of standard products

**B Shop Drawings** Indicate outline and support point dimensions, voltage, main bus ampacity, integrated short circuit ampere rating circuit breaker and fusible switch arrangement and sizes

- C. Source Quality control submittals: Indicate results of factory tests and inspections.
- D. Field Quality Control Submittals: Indicate results of Contractor furnished tests and inspections.

**1.04 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual locations of panelboards and record actual circuiting arrangements.
- B. Operation and Maintenance Data: Submit spare parts listing; source and current prices of replacement parts and supplies; and recommended maintenance procedures and intervals.

**1.05 MAINTENANCE MATERIAL SUBMITTALS**

- A. Extra Stock Materials:
  - 1. Furnish two of each panelboard key. Panelboards keyed alike.

**1.06 QUALITY ASSURANCE**

- A. Qualifications
  - 1. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years of experience.

**PART 2. - PRODUCTS**

**2.01 DISTRIBUTION PANELBOARDS**

- A. Description: NEMA PB 1, circuit breaker type and fusible switch type panelboards.
- B. Operation:
  - 1. Service Conditions:
    - a. Temperature: < 104 degrees F.
    - b. Altitude: < 6,000 feet above sea level.
  - 2. Minimum integrated short circuit rating as indicated on Drawings.
- C. Materials
  - 1. Panelboard Bus: Copper current carrying components, ratings as indicated on Drawings. Furnish copper ground bus in each panelboard.
  - 2. Fusible Switch Assemblies: NEMA KS 1, quick-make, quick-break, load interrupter enclosed knife switch with externally operable handle. Furnish interlock to prevent opening front cover with switch in ON position. Handle lockable in OFF position. Fuse clips: Designed to accommodate NEMA FU 1, Class R fuses.
  - 3. Molded Case Circuit Breakers: UL 489, circuit breakers with integral thermal and instantaneous magnetic trip in each pole. Furnish circuit breakers UL listed as Type HACR for air conditioning equipment branch circuits.
  - 4. Circuit Breaker Accessories: Trip units and auxiliary switches as indicated on Drawings.
  - 5. Surge Suppressers: External Modular MOV's ratings as shown on Drawings.

6. Enclosure: NEMA PB 1, Type 1.
7. Cabinet Front: Surface door-in-door type, fastened with hinged door with flush lock.

D. Finishes

1. Manufacturer's standard gray enamel.

**2.02 BRANCH CIRCUIT PANELBOARDS**

- A. Description: NEMA PB1, circuit breaker type, lighting and appliance branch circuit panelboard.
- B. Materials:
1. Panelboard Bus: Copper current carrying components, ratings as indicated on Drawings. Furnish copper ground bus in each panelboard.
  2. Minimum Integrated Short Circuit Rating: as indicated on Drawings.
  3. Molded Case Circuit Breakers: UL 489, bolt-on type thermal magnetic trip circuit breakers, with common trip handle for all poles, listed as Type SWD for lighting circuits, Type HACR for air conditioning equipment circuits, Class A ground fault interrupter circuit breakers as indicated on Drawings. Provide UL class 760 arc-fault interrupter circuit breakers as indicated on Drawings. Do not use tandem circuit breakers.
  4. Surge Suppressers: External Modular MOV's ratings as shown on Drawings.
  5. Enclosure: NEMA PB 1, Type 1.
  6. Cabinet Box: 6 inches deep and 20 inches wide, unless the panelboard is part of the integrated power system switchgear.
- C. Cabinet Front: Surface cabinet front with concealed trim clamps, concealed hinge, metal directory frame, and flush lock keyed alike. Unless the panelboard is part of the integrated power system switchgear. Finishes:
1. Finish in manufacturer's standard gray enamel.

**PART 3. - EXECUTION**

**3.01 DEMOLITION**

- A. Disconnect abandoned panelboards. Remove abandoned panelboards.
- B. Maintain access to existing panelboard remaining active and requiring access. Modify installation or provide access panel.

**3.02 INSTALLATION**

- A. Install panelboards in accordance with NEMA PB 1.1.
- B. Install panelboards plumb.
- C. Install recessed panelboards flush with wall finishes.
- D. Height: 6 feet to top of panelboard; install panelboards taller than 6 feet with bottom no more than 4 inches above floor.
- E. Install filler plates for unused spaces in panelboards.

- F. Provide typed circuit directory for each branch circuit panelboard. Revise directory to reflect circuiting changes to balance phase loads. Identify each circuit as to its clear, evident and specific purpose of use.
- G. Install nameplates.
- H. Install spare conduits out of each recessed panelboard to accessible location above ceiling or below floor. Minimum spare conduits: 3 empty 1 inch. Identify each as SPARE.
- I. Ground and bond panelboard enclosure. Connect equipment ground bars of panels in accordance with NFPA 70.

**3.03 REPAIR**

- A. Repair existing panelboards to remain or to be reinstalled.

**3.04 FIELD QUALITY CONTROL**

- A. Inspect and test in accordance with NETA ATS, except Section 4.
- B. Perform circuit breaker inspections and tests listed in NETA ATS, Section 7.6.
- C. Perform switch inspections and tests listed in NETA ATS, Section 7.5.
- D. Perform controller inspections and tests listed in NETA ATS, Section 7.16.1.

**3.05 ADJUSTING**

- A. Measure steady state load currents at each panelboard feeder; rearrange circuits in panelboard to balance phase loads to within 20 percent of each other. Maintain proper phasing for multi-wire branch circuits.

**3.06 CLEANING**

- A. Clean existing panelboards to remain or to be reinstalled.

SUBSECTION 260010.08

Wiring Devices

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section includes wall switches; wall dimmers; receptacles; multioutlet assembly; and device plates and decorative box covers.

**1.02 REFERENCES**

- A. National Electrical Manufacturers Association:
  - 1. NEMA WD 1 - General Requirements for Wiring Devices.
  - 2. NEMA WD 6 - Wiring Devices-Dimensional Requirements.

**1.03 SUBMITTALS**

- A. Product Data: Submit manufacturer's catalog information showing dimensions, colors, and configurations.
- B. Samples: Submit two samples of each wiring device and wall plate illustrating materials, construction, color, and finish.

**1.04 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years of experience.

**1.05 EXTRA MATERIALS**

- A. Furnish two of each style, size, and finish wall plate.

**PART 2. - PRODUCTS**

**2.01 WALL SWITCHES**

- A. Product Description: NEMA WD 1, Heavy-Duty, AC only general-use snap switch.
- B. Body and Handle: Black plastic with toggle handle.
- C. Ratings:
  - 1. Voltage: 120 volts, AC.
  - 2. Current: 20 amperes.
- D. Ratings: Match branch circuit and load characteristics.

**2.02 RECEPTACLES**

- A. Product Description: NEMA WD 1, Heavy-duty general use receptacle.
- B. Device Body: Black plastic.
- C. Configuration: NEMA WD 6, type as indicated on Drawings.
- D. Convenience Receptacle: Type 5-20R.

- E. GFCI Receptacle: Convenience receptacle with integral ground fault circuit interrupter to meet regulatory requirements.

**2.03 WALL PLATES**

- A. Cover Plate: 302 stainless steel.

**PART 3. - EXECUTION**

**3.01 EXAMINATION**

- A. Verify outlet boxes are installed at proper height.
- B. Verify wall openings are neatly cut and completely covered by wall plates.
- C. Verify branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.

**3.02 PREPARATION**

- A. Clean debris from outlet boxes.

**3.03 EXISTING WORK**

- A. Disconnect and remove abandoned wiring devices.
- B. Modify installation to maintain access to existing wiring devices to remain active.
- C. Clean and repair existing wiring devices to remain or to be reinstalled.

**3.04 INSTALLATION**

- A. Install devices plumb and level.
- B. Install switches with OFF position down.
- C. Install wall dimmers to achieve full rating specified and indicated after derating for ganging as instructed by manufacturer.
- D. Do not share neutral conductor on load side of dimmers.
- E. Install receptacles with grounding pole on bottom.
- F. Connect wiring device grounding terminal to outlet box with bonding jumper and branch circuit equipment grounding conductor.
- G. Install wall plates on flush mounted switches, receptacles, and blank outlets.
- H. Connect wiring devices by wrapping solid conductor around screw terminal. Install solid conductor for branch circuits 10 AWG and smaller.
- I. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface mounted outlets.

**3.05 INTERFACE WITH OTHER PRODUCTS**

- A. Coordinate locations of outlet boxes to obtain mounting heights as specified.
- B. Install wall switch 48 inches above finished floor.
- C. Install convenience receptacle 18 inches above finished floor.

- D. Install convenience receptacle 6 inches above counter.

3.06 **FIELD QUALITY CONTROL**

- A. Inspect each wiring device for defects.
- B. Operate each wall switch with circuit energized and verify proper operation.
- C. Verify each receptacle device is energized.
- D. Test each receptacle device for proper polarity.
- E. Test each GFCI receptacle device for proper operation.

3.07 **ADJUSTING**

- A. Adjust devices and wall plates to be flush and level.

3.08 **CLEANING**

- A. Clean exposed surfaces to remove splatters and restore finish.



SUBSECTION 260010.09

Enclosed Switches

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Fusible.
  - 2. Nonfusible switches.

**1.02 REFERENCE STANDARDS**

- A. National Electrical Manufacturers Association:
  - 1. NEMA FU 1 - Low Voltage Cartridge Fuses.
  - 2. NEMA KS 1 - Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum).
- B. International Electrical Testing Association:
  - 1. NETA ATS - Acceptance Testing Specifications for Electrical Power Distribution Equipment and Systems.

**1.03 SUBMITTALS**

- A. Product Data: Submit switch ratings and enclosure dimensions.

**1.04 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual locations of enclosed switches and ratings of installed fuses.

**1.05 QUALIFICATIONS**

- A. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years of experience.

**PART 2. - PRODUCTS**

**2.01 FUSIBLE SWITCH ASSEMBLIES**

- A. Description: NEMA KS 1, Type HD, enclosed load interrupter knife switch. Handle lockable in OFF position.
- B. Operation:
  - 1. Switch Ratings
    - a. Switch Rating: Horsepower rated for AC or DC as indicated on Drawings.
    - b. Short Circuit Current Rating: UL listed for 200,000 rms symmetrical amperes when used with or protected by Class R fuses.

- C. Materials:
  - 1. Fuse clips: Designed to accommodate NEMA FU 1, Class R fuses.
  - 2. Enclosure: NEMA KS 1, to meet conditions.
    - a. Interior Dry Locations: Type 1. Fabricate enclosure from steel finished with manufacturer's standard gray enamel.
    - a. b. Exterior Locations: Type 4X. Fabricate enclosure from stainless steel.
  - 3. Service Entrance: Switches identified for use as service equipment are to be labeled for this application. Furnish solid neutral assembly and equipment ground bar.
  - 4. Furnish switches with entirely copper current carrying parts.

## 2.02 NONFUSIBLE SWITCH ASSEMBLIES

- A. Description: NEMA KS 1, Type HD enclosed load interrupter knife switch. Handle lockable in OFF position.
- B. Operation:
  - 1. Switch Ratings
    - a. Switch Rating: Horsepower rated for AC or DC as indicated on Drawings.
- C. Materials:
  - 1. Enclosure: NEMA KS 1, to meet conditions.
    - a. Interior Dry Locations: Type 1. Fabricate enclosure from steel finished with manufacturer's standard gray enamel.
    - b. Exterior Locations: Type 4X. Fabricate enclosure from stainless steel.
  - 2. Furnish switches with entirely copper current carrying parts.

## PART 3. - EXECUTION

### 3.01 DEMOLITION

- A. Disconnect and remove abandoned enclosed switches.
- B. Maintain access to existing enclosed switches and other installations remaining active and requiring access.

### 3.02 INSTALLATION

- A. Install enclosed switches where indicated.
- B. Install enclosed switches plumb. Provide supports.
- C. Height: 5 feet to operating handle.
- D. Install fuses for fusible disconnect switches.
- E. Install engraved plastic nameplates. Engrave nameplates with the equipment served and the panel and circuit number supplying the switch.
- F. Apply adhesive tag on inside door of each fused switch indicating NEMA fuse class and size installed.

3.03 **FIELD QUALITY CONTROL**

- A. Inspect and test in accordance with NETA ATS, except Section 4.
- B. Perform inspections and tests listed in NETA ATS, Section 7.5.

3.04 **CLEANING**

- A. Clean existing enclosed switches to remain or to be reinstalled.

SUBSECTION 260010.10

Fuses

**PART 1. - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Fuses.

**1.02 REFERENCE STANDARDS**

- A. National Electrical Manufacturers Association:
  - 1. NEMA FU 1 - Low Voltage Cartridge Fuses.

**1.03 SUBMITTALS**

- A. Product Data: Submit data sheets showing electrical characteristics, including time-current curves.

**1.04 CLOSEOUT SUBMITTALS**

- A. Project Record Documents: Record actual sizes, ratings, and locations of fuses.

**1.05 MAINTENANCE MATERIALS**

- A. Spare Parts:
  - 1. Furnish two fuse pullers.
- B. Extra Materials:
  - 1. Furnish four spare fuses of each Class, size, and rating installed.

**1.06 QUALITY ASSURANCE**

- A. Qualifications:
  - 1. Manufacturer: Company specializing in manufacturing products specified in this section with minimum three years of experience.

**PART 2. - PRODUCTS**

**2.01 FUSE PERFORMANCE REQUIREMENTS**

- A. Main Service Switches: Class RK1 (time delay).
- B. Power Feeder Switches: Class RK1.
- C. General Purpose Branch Circuits: Class RK1.
- D. Motor Branch Circuits: Class RK1 (time delay).

**2.02 FUSES**

- A. Dimensions and Performance: NEMA FU 1, Class as specified or as indicated on Drawings.

- B. Voltage: Rating suitable for circuit phase-to-phase voltage.

**2.03 CLASS RK1 (TIME DELAY) FUSES**

- A. Dimensions and Performance: NEMA FU 1.
- B. Voltage: Rating suitable for circuit phase-to-phase voltage.

**2.04 CLASS RK1 (NON-TIME-DELAY) FUSES**

- A. Dimensions and Performance: NEMA FU 1.
- B. Voltage: Rating suitable for circuit phase-to-phase voltage.

**PART 3. - EXECUTION**

**3.01 DEMOLITION**

- A. Remove fuses from abandoned circuits.
- B. Maintain access to existing fuses and other installations remaining active and requiring access. Modify installation or provide access panel.

**3.02 INSTALLATION**

- A. Install fuse with label oriented so manufacturer, type, and size are easily read.

SUBSECTION 260010.11

Fire Alarm Systems

**PART 1 - GENERAL**

**1.01 SUMMARY**

- A. Section Includes:
  - 1. Fire alarm control unit.
  - 2. System smoke detectors.
  - 3. Notification appliances.
  - 4. Remote annunciator.

**1.02 SYSTEM DESCRIPTION**

- A. Dedicated to fire alarm service only.

**1.03 SUBMITTALS**

- A. General Submittal Requirements:
  - 1. Submittals shall be approved by authorities having jurisdiction prior to submitting them to Architect.
  - 2. Shop Drawings shall be prepared by persons with the following qualifications:
    - a. Trained and certified by manufacturer in fire alarm system design.
    - b. NICET-certified fire alarm technician, Level III minimum.
- B. Product Data: For each type of product indicated.
- C. Shop Drawings: For fire alarm system. Include plans, elevations, sections, details, and attachments to other work.
  - 1. Comply with recommendations in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter in NFPA 72.
  - 2. Include voltage drop calculations for notification appliance circuits.
  - 3. Include battery size calculations.
  - 4. Include performance parameters and installation details for each detector, verifying that each detector is listed for the complete range of air velocity, temperature, and humidity possible when air-handling system is operating.
  - 5. Include plans, sections, and elevations of heating, ventilating, and air-conditioning ducts, drawn to scale and coordinating installation of duct smoke detectors and access to them. Show critical dimensions that relate to placement and support of sampling tubes, detector housing, and remote status and alarm indicators. Locate detectors according to manufacturer's written recommendations.
  - 6. Include floor plans to indicate final outlet locations showing the zone designation of each device. Show size and route of cable and conduits.
- D. Qualification Data: For qualified Installer.
- E. Field quality-control reports.

- F. Operation and Maintenance Data: For fire alarm systems and components to include in emergency, operation, and maintenance manuals. Include the following:
1. Comply with the "Records" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72.
  2. Provide "Record of Completion Documents" according to NFPA 72 article "Permanent Records" in the "Records" Section of the "Inspection, Testing and Maintenance" Chapter.
  3. Record copy of site-specific software.
  4. Provide "Maintenance, Inspection and Testing Records" according to NFPA 72 article of the same name and include the following:
    - a. Frequency of testing of installed components.
    - b. Frequency of inspection of installed components.
    - c. Requirements and recommendations related to results of maintenance.
    - d. Manufacturer's user training manuals.
  5. Manufacturer's required maintenance related to system warranty requirements.
  6. Abbreviated operating instructions for mounting at fire alarm control unit.
  7. Copy of NFPA 25.

#### 1.04 QUALITY ASSURANCE

- A. Installer Qualifications: Personnel shall be trained and certified by manufacturer for installation of units required for this Project.
- B. Installer Qualifications: Installation shall be by personnel certified by NICET as fire alarm Level III technician.
- C. Source Limitations for Fire Alarm System and Components: Obtain fire alarm system from single source from single manufacturer. Components shall be compatible with, and operate as, an extension of existing system.

Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

### PART 2 - PRODUCTS

#### 2.01 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements as specified in contract documents.

#### 2.02 TEMS OPERATIONAL DESCRIPTION

- A. Revise this article to provide a functional description applicable to Project.
- B. Fire alarm signal initiation shall be by one or more of the following devices:
  1. Smoke detectors.

- C. Fire alarm signal shall initiate the following actions:
  - 1. Continuously operate alarm notification appliances.
  - 2. Identify alarm zone at fire alarm control unit (for future use).
  - 3. Transmit an alarm signal to the remote alarm receiving station.
  
- D. System trouble signal initiation shall be by one or more of the following devices and actions:
  - 1. Open circuits, shorts, and grounds in designated circuits.
  - 2. Opening, tampering with, or removing alarm-initiating and supervisory signal-initiating devices.
  - 3. Loss of primary power at fire alarm control unit.
  - 4. Ground or a single break in fire alarm control unit internal circuits.
  - 5. Abnormal ac voltage at fire alarm control unit.
  - 6. Break in standby battery circuitry.

### 2.03 FIRE ALARM CONTROL UNIT

- A. General Requirements for Fire Alarm Control Unit:
  - 1. Modular, power-limited design with electronic modules, UL 864 listed.
    - a. Include a real-time clock for time annotation of events.
  
- B. Alphanumeric Display and System Controls: Display alarm, supervisory, and component status messages and the programming and control menu.
  - 1. Annunciator and Display: Liquid-crystal type
  
- C. Circuits:
  - 1. No Fewer Than Five Initiating Device Circuits:
    - a. Four, NFPA 72, Class B.
    - b. One circuit(s), NFPA 72, Class A, Style 6
  
  - 2. No Fewer Than one Notification Appliance Circuits: NFPA 72, Class B, Style Y.
  
- D. Primary Power: 24-V dc obtained from 120-V ac service and a power-supply module. Initiating devices, notification appliances, signaling lines, trouble signals, shall be powered by the 24-V dc source.
  - 1. Alarm current draw of the entire fire-alarm system shall not exceed 80 percent of the power-supply module rating.
  
- E. Secondary Power: 24-V dc supply system with batteries, automatic battery charger, and automatic transfer switch.
  
- F. Instructions: Computer printout or typewritten instruction card mounted behind a plastic or glass cover in a stainless steel or aluminum frame. Include interpretation and describe appropriate response for displays and signals. Briefly describe the functional operation of the system under normal, alarm, and trouble conditions.



**2.04 SYSTEM SMOKE DETECTORS**

- A. General Requirements for System Smoke Detectors:
1. Operating at 24-V dc, nominal.
  2. Detectors shall be four wire type.
  3. Base Mounting: Detector and associated electronic components shall be mounted in a twist-lock module that connects to a fixed base. Provide terminals in the fixed base for connection to building wiring.
  4. Self-Restoring: Detectors do not require resetting or readjustment after actuation to restore them to normal operation.
  5. Integral Visual-Indicating Light: LED type indicating detector has operated and power-on status.
  6. Number of settable levels in fire-alarm control unit varies among manufacturers and between detector types. Indicate specific number of levels on Drawings or in the "Remarks" column of a detector schedule.

**2.05 NOTIFICATION APPLIANCES**

- A. General Requirements for Notification Appliances: Connected to notification appliance signal circuits, zoned as indicated, equipped for mounting as indicated and with screw terminals for system connections.
1. Combination Devices: Factory-integrated audible and visible devices in a single-mounting assembly, equipped for mounting as indicated and with screw terminals for system connections.
- B. Horns: Electric-vibrating-polarized type, 24-V dc; with provision for housing the operating mechanism behind a grille. Comply with UL 464. Horns shall produce a sound-pressure level of 90 dBA, measured 10 feet from the horn, using the coded signal prescribed in UL 464 test protocol.
- C. Visible Notification Appliances: Xenon strobe lights comply with UL 1971, with clear or nominal white polycarbonate lens mounted on an aluminum faceplate. The word "FIRE" is engraved in minimum 1-inch high letters on the lens.
1. Rated Light Output: Indicated on Drawings.
  2. Mounting: Wall mounted.
  3. For units with guards to prevent physical damage, light output ratings shall be determined with guards in place.
  4. Flashing shall be in a temporal pattern, synchronized with other units.
  5. Strobe Leads: Factory connected to screw terminals.
  6. Mounting Faceplate: Factory finished, red

**2.06 REMOTE ANNUNCIATOR**

- A. Description: Annunciator functions shall match those of fire-alarm control unit for alarm, supervisory, and trouble indications. Manual switching functions shall match those of fire alarm control unit, including acknowledging, silencing, resetting, and testing.
1. Mounting: Surface cabinet.

- B. Display Type and Functional Performance: Alphanumeric display and LED indicating lights shall match those of fire-alarm control unit. Provide controls to acknowledge, silence, reset, and test functions for alarm, supervisory, and trouble signals.

### **PART 3 - EXECUTION**

#### **3.01 EQUIPMENT INSTALLATION**

- A. Comply with NFPA 72 for installation of fire-alarm equipment.
- B. Connecting to Existing Equipment: Verify that existing fire-alarm system is operational before making changes or connections.
- C. Smoke -Detector Spacing:
  - 1. Comply with NFPA 72, "Smoke-Sensing Fire Detectors" Section in the "Initiating Devices" Chapter, for smoke-detector spacing.
  - 2. Smooth ceiling spacing shall not exceed 30 feet.
  - 3. Spacing of detectors for irregular areas, for irregular ceiling construction, and for high ceiling areas shall be determined according to NFPA 72.
  - 4. HVAC: Locate detectors not closer than 3 feet from air-supply diffuser or return-air opening.
  - 5. Lighting Fixtures: Locate detectors not closer than 12 inches from any part of a lighting fixture.
- D. Audible Alarm-Indicating Devices: Install not less than 6 inches below the ceiling. Install bells and horns on flush-mounted back boxes with the device-operating mechanism concealed behind a grille.
- E. Visible Alarm-Indicating Devices: Install adjacent to each alarm bell or alarm horn and at least 6 inches below the ceiling.
- F. Device Location-Indicating Lights: Locate in public space near the device they monitor.
- G. Fire Alarm Control Unit: Surface mounting, with tops of cabinets not more than 72 inches above the finished floor.
- H. Annunciator: Install with top of panel not more than 72 inches above the finished floor.

#### **3.02 IDENTIFICATION**

- A. Identify system components, wiring, cabling, and terminals.
- B. Install framed instructions in a location visible from fire alarm control unit.

#### **3.03 GROUNDING**

- A. Ground fire alarm control unit and associated circuits; comply with IEEE 1100. Install a ground wire from main service ground to fire-alarm control unit.

**3.04 FIELD QUALITY CONTROL**

- A. Field tests shall be witnessed by Resident Engineer and owner.
- B. Perform tests and inspections.
- C. Tests and Inspections:
  - 1. Visual Inspection: Conduct the visual inspection prior to testing.
    - a. Inspection shall be based on completed Record Drawings and system documentation that is required by NFPA 72 in its "Completion Documents, Preparation" Table in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter.
    - b. Comply with "Visual Inspection Frequencies" Table in the "Inspection" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72; retain the "Initial/Reacceptance" column and list only the installed components.
  - 2. System Testing: Comply with "Test Methods" Table in the "Testing" Section of the "Inspection, Testing, and Maintenance" Chapter in NFPA 72.
  - 3. Test audible appliances for the public operating mode according to manufacturer's written instructions. Perform the test using a portable sound-level meter complying with Type 2 requirements in ANSI S1.4.
  - 4. Test visible appliances for the public operating mode according to manufacturer's written instructions.
  - 5. Factory-authorized service representative shall prepare the "Fire Alarm System Record of Completion" in the "Documentation" Section of the "Fundamentals of Fire Alarm Systems" Chapter in NFPA 72 and the "Inspection and Testing Form" in the "Records" Section of the "Inspection, Testing and Maintenance" Chapter in NFPA 72.
- D. Reacceptance Testing: Perform reacceptance testing to verify the proper operation of added or replaced devices and appliances.
- E. Fire alarm system will be considered defective if it does not pass tests and inspections.
- F. Prepare test and inspection reports.

SECTION E-260020

Electrical Utility Service Work

1. Description. Under this item the Contractor shall perform all electrical work to provide electrical utility service to the site in accordance with the plans, specifications, New York City Electric Code, Con Edison Standards and directions of the Engineer. This work will include all primary concrete encased ductbank, primary cable, transformer pads, transformer installation, transformer connections, secondary conduit and secondary cable, fencing around the transformer and all required grounding up to Seaman's Cottage.

2. Materials. Furnish materials in compliance with NYC Electric Code, Con Edison Specifications and as shown on the Plans.

3. Methods. Installation shall be in compliance with NYC Electric Code, Con Edison Specifications and as shown on the Plans.

4. Samples. Submit catalog cuts of proposed electrical equipment for review and approval by the Engineer. The submittals shall include: conduit, cable, fittings, transformer pad details and grounding system layout.

5. Measurement. The quantity to be measured for payment shall be lump sum for the electrical utility service to be furnished and installed on site, to the satisfaction of the Engineer.

6. Price to Cover. The contract price bid shall be a lump sum price per electrical utility service and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, all in accordance with the plans, the specifications, and directions of the Engineer.

Payment for Electrical Utility Service Work will be made under:

Item No.	Item	Pay Unit
E-260020	ELECTRICAL UTILITY SERVICE WORK	LUMP SUM

SECTION E-260020 A

Con Ed Supplied Equipment and Service Work

**1.1 INTENT.** This section describes the items listed below associated with materials, equipment and services to be supplied and performed by Con Edison and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount.

**1.2 DESCRIPTION.** During the course of this contract, various materials, equipment and services will be supplied and performed by Con Edison and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount. As referenced in Con Ed estimates numbered 1591380 R1 and 1591380 R2, Con Ed will be responsible for the following inclusive items of work:

- Removal of Overhead Electrical Facilities
- Furnish and Deliver 500KVA, 3-Phase 277/480V Padmount Transformer
- Install 40-Amp Fused Cutouts and 13 KV terminators on Utility Pole #21071
- Install One (1) Span 3-Conductor 2/0 EPR Aerial Cable From Pole #21071 to Pole #20683
- Install 3-Conductor 2/0 EPR Primary Cable in Five Inch (5") Conduit from Pole #20683 to Customer's Manhole (Property Line Box)

Measurement and Payment for these services and materials as provided by Con Ed will be described below.

**1.3 METHODS OF MEASUREMENT**

**1.3.1 Fixed Sum Items:** The fixed price lump sum shown in the bid proposal for this item shall be considered the price bid, although actual payment will be based on the actual invoices for the materials and work performed and submitted to the Contractor for payment and approved by the Engineer. The fixed sum is not to be altered in any manner by the bidder.

**1.4 BASIS OF PAYMENT**

**1.4.1 Fixed Sum Items:** The Contract price for this item shall be a lump sum price for the work described under this item and shall be equal to the sum total of all vouchers submitted to the Contractor by Con Ed as approved by the Engineer, for payment by the Contractor to Con Ed for the cost incurred.

Payment under this item will be made by the City on a reimbursement basis only for payments made by the Contractor to Con Ed for providing the materials and services described above and shall equal the total amount of invoices submitted by Con Ed and paid by the Contractor during the period for which a requisition is submitted. The Contractor shall be required to submit to the Engineer satisfactory evidence of payment for Con Ed materials and services being requisitioned. No retainage will be withheld by the Agency on such payments made under this section.

The total estimated cost of this item is the "fixed sum" amount shown for this item in the Bid Schedule. No guarantee is given that the actual lump sum cost for this item will in fact be the final "fixed sum" amount. The "fixed sum" amount is included in the total bid solely to insure that sufficient monies will be available to pay the Contractor for these services.

The Contractor shall maintain separate books of accounts and shall not charge any portion of the cost of **CON ED SUPPLIED EQUIPMENT AND SERVICE WORK** to another part of the work. Payment and partial payments under this item shall be treated separately from the rest of the contract items.

The voucher for payment shall be submitted to the Engineer on an as-received monthly basis and shall include the signed original invoices.

The "fixed sum" is for bidding purposes only and shall not be varied in the bid. The Contractor will be paid for the actual amount regardless of the fixed sum, which may be more or less than the fixed amount.

**1.5 PAY ITEMS**

The following contract Pay Item shall apply:

Item No.	Item	Pay Unit
E-260020 A	CON ED SUPPLIED EQUIPMENT AND SERVICE WORK	FIXED SUM

For Item No. E-260020 A: **CON ED SUPPLIED EQUIPMENT AND SERVICE WORK**, a maximum allowance of **\$67,000** is hereby established.

SECTION E-260020 TW

Allowance For Time Warner Performed Work

**1.1 INTENT.** This section describes the items listed below associated with materials, equipment and services to be supplied and performed by Time Warner and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount.

**1.2 DESCRIPTION.** During the course of this contract, various materials, equipment and services will be supplied and performed by Time Warner and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount. Time Warner will be responsible for the following inclusive items of work:

- Terminate Main Service Points on Utility Poles
- Remove Existing Overhead Facilities Currently on Utility Poles
- Remove Overhead Cable From Utility Poles to Buildings

Measurement and Payment for these services and materials as provided by Time Warner will be described below.

**1.3 METHODS OF MEASUREMENT**

**1.3.1 Fixed Sum Items:** The fixed price lump sum shown in the bid proposal for this item shall be considered the price bid, although actual payment will be based on the actual invoices for the materials and work performed and submitted to the Contractor for payment and approved by the Engineer. The fixed sum is not to be altered in any manner by the bidder.

**1.4 BASIS OF PAYMENT**

**1.4.1 Fixed Sum Items:** The Contract price for this item shall be a lump sum price for the work described under this item and shall be equal to the sum total of all vouchers submitted to the Contractor by Time Warner as approved by the Engineer, for payment by the Contractor to Time Warner for the cost incurred.

Payment under this item will be made by the City on a reimbursement basis only for payments made by the Contractor to Time Warner for providing the materials and services described above and shall equal the total amount of invoices submitted by Time Warner and paid by the Contractor during the period for which a requisition is submitted. The Contractor shall be required to submit to the Engineer satisfactory evidence of payment for Time Warner materials and services being requisitioned. No retainage will be withheld by the Agency on such payments made under this section.

The total estimated cost of this item is the "fixed sum" amount shown for this item in the Bid Schedule. No guarantee is given that the actual lump sum cost for this item will in fact be the final "fixed sum" amount. The "fixed sum" amount is included in the total bid solely to insure that sufficient monies will be available to pay the Contractor for these services.

The Contractor shall maintain separate books of accounts and shall not charge any portion of the cost of **ALLOWANCE FOR TIME WARNER PERFORMED WORK** to another part of the work. Payment and partial payments under this item shall be treated separately from the rest of the contract items.

The voucher for payment shall be submitted to the Engineer on an as-received monthly basis and shall include the signed original invoices.

The "fixed sum" is for bidding purposes only and shall not be varied in the bid. The Contractor will be paid for the actual amount regardless of the fixed sum, which may be more or less than the fixed amount.

**1.5 PAY ITEMS**

The following contract Pay Item shall apply:

Item No.	Item	Pay Unit
SECTION E-260020 TW	ALLOWANCE FOR TIME WARNER PERFORMED WORK	FIXED SUM

For Item No. E-260020 TW: ALLOWANCE FOR TIME WARNER PERFORMED WORK, a maximum allowance of **\$7,000** is hereby established.



SECTION E-260020 V

Allowance For Verizon Performed Work

**1.1 INTENT.** This section describes the items listed below associated with materials, equipment and services to be supplied and performed by Verizon and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount.

**1.2 DESCRIPTION.** During the course of this contract, various materials, equipment and services will be supplied and performed by Verizon and paid for by the Contractor as a Fixed Sum allowance as part of his Contract amount. Verizon will be responsible for the following inclusive items of work:

- Terminate Main Service Point on Utility Pole
- Remove Existing Overhead Facilities Currently on Utility Poles
- Remove Main Service Overhead Cable From The Utility Pole to Building

Measurement and Payment for these services and materials as provided by Verizon will be described below.

**1.3 METHODS OF MEASUREMENT**

**1.3.1 Fixed Sum Items:** The fixed price lump sum shown in the bid proposal for this item shall be considered the price bid, although actual payment will be based on the actual invoices for the materials and work performed and submitted to the Contractor for payment and approved by the Engineer. The fixed sum is not to be altered in any manner by the bidder.

**1.4 BASIS OF PAYMENT**

**1.4.1 Fixed Sum Items:** The Contract price for this item shall be a lump sum price for the work described under this item and shall be equal to the sum total of all vouchers submitted to the Contractor by Verizon as approved by the Engineer, for payment by the Contractor to Verizon for the cost incurred.

Payment under this item will be made by the City on a reimbursement basis only for payments made by the Contractor to Verizon for providing the materials and services described above and shall equal the total amount of invoices submitted by Verizon and paid by the Contractor during the period for which a requisition is submitted. The Contractor shall be required to submit to the Engineer satisfactory evidence of payment for Verizon materials and services being requisitioned. No retainage will be withheld by the Agency on such payments made under this section.

The total estimated cost of this item is the "fixed sum" amount shown for this item in the Bid Schedule. No guarantee is given that the actual lump sum cost for this item will in fact be the final "fixed sum" amount. The "fixed sum" amount is included in the total bid solely to insure that sufficient monies will be available to pay the Contractor for these services.

The Contractor shall maintain separate books of accounts and shall not charge any portion of the cost of **ALLOWANCE FOR VERIZON PERFORMED WORK** to another part of the work. Payment and partial payments under this item shall be treated separately from the rest of the contract items.

The voucher for payment shall be submitted to the Engineer on an as-received monthly basis and shall include the signed original invoices.

The "fixed sum" is for bidding purposes only and shall not be varied in the bid. The Contractor will be paid for the actual amount regardless of the fixed sum, which may be more or less than the fixed amount.

**1.5 PAY ITEMS**

The following contract Pay Item shall apply:

Item No.	Item	Pay Unit
SECTION E-260020 V	ALLOWANCE FOR VERIZON PERFORMED WORK	FIXED SUM

For Item No. E-260020 V: ALLOWANCE FOR VERIZON PERFORMED WORK, a maximum allowance of **\$5,000** is hereby established.

#### 4. SPECIAL PROVISIONS

The following shall become a part of and apply to the Contract:

A. LINES AND GRADES. The Contractor shall furnish lines and grades in accordance with Section 1.06.27 of the Standard Specifications, except that survey controls established for this project may no longer exist and the Contractor shall be required to re-establish the survey control information using official Borough Survey Control Monuments and Bench Marks, where they exist. The Contractor shall check with Topographic Section of the Borough President's Office as to the reliability and accuracy of the data to be used for lines and grades.

B. SPECIFIC TRAFFIC STIPULATIONS. Under this contract, the Contractor shall perform the work in strict accordance with the requirements of Section 6.70 in the Standard Highway Specifications, specific traffic stipulations as called for on the plans, OCMC Traffic Stipulations attached to the end of these Special Provisions, and the directions of the Engineer. In case of a conflict, the Engineer's decision shall be final.

C. HOLIDAY CONSTRUCTION EMBARGO. A special Holiday Construction Embargo shall be in effect on the Friday of the week preceding Thanksgiving Day week from 6:00 AM to 11:59 PM and again from the Monday of Thanksgiving Day week from 6:00 AM through January 2, at 11:59 PM. Roadway and sidewalk construction activities will be restricted during the embargo period on the streets listed below\*.

Any permits issued prior to the date of this notice, for work during this embargo period on the streets listed below which do not already have the permit stipulation "410" are hereby suspended for the period noted above. All permittees must comply with this embargo unless a special waiver is granted by OCMC. Waiver requests must be filed at least thirteen days before Thanksgiving Day, in the Permit Office by filing a "Request for Roadway/Sidewalk Permits During "Embargo Periods" and submitting supporting documentation. Waiver requests should only be submitted for critical reasons for a specific project. If a waiver is granted, the applicant will be notified so they can apply for the approved permits. Waivers are not required for ongoing Building Construction Activity Permits which already include the "410" permit stipulation. Waiver request forms may be obtained at any Permit Office or on the Department of Transportation's website at: <http://www.nyc.gov/html/dot/downloads/pdf/holidayembapp.pdf>

- 
- \* Please note that this embargo only applies to NYCDOT construction permits.
  - \* List of street and maps of the affected locations are available by borough on the Department of Transportation's website at: <http://www.nyc.gov/html/dot/html/motorist/trafalrt.shtml>

Prior to this embargo period all necessary measures must be taken so that all roadways and sidewalks are in proper condition to allow for the expeditious and safe movement of vehicular, bicycle and pedestrian traffic. Tool carts, cable reels, containers, and material stored on roadways must be removed during the embargo period.

The opening of utility access covers is prohibited on any of the streets noted below between the hours of 6:00 AM and midnight unless the utility or Contractor files for an Emergency Authorization Number as required by section 2-07 of the Department of Transportation's Highway Rules. The planned opening of utility access covers may occur during the hours of 12:01 AM and 5:59 AM where no authorization number is required.

Temporary restoration of the streets and sidewalks and removal thereof, if required for the Holiday Embargo period, will be paid for under the appropriate scheduled items.

No extension of time due to the shutdown period will be granted to the Contractor for completion of the work.

D. DISPOSAL OF EXCESS EXCAVATED MATERIAL. All excess excavated material, with the exception of contaminated material, shall become the property of the Contractor and shall be properly disposed of away from the site, at the Contractor's expense. Contaminated material shall be disposed of separately in accordance with contract requirements.

E. (NO TEXT)

F. CONTRACT ITEMS THAT INCLUDE BACKFILL AS A PART OF THEIR WORK. The following shall pertain to all contract items that have backfill as a part of their work: Backfilling shall comply with Subsection 4.11.3 of the Standard Specifications and no additional payment will be made for any Highway or Street Lighting work item requiring Contractor to furnish additional fill material to meet these requirements when backfilling.

G. SCHEDULING PRESENTATION. The Contractor shall submit construction schedule in the form of a bar chart using "Microsoft Project 2010", or in an approved equivalent program which shall be directly and fully translatable into Microsoft Project 2010 format, within seven days of the initial Pre-Construction Meeting. Each bar in the chart shall show dates the Contractor plans to start and complete each construction activity after the initial Pre-Construction Meeting. Bar chart shall show the order and interdependence of all activities necessary to complete the work and the sequence in which activity is to be accomplished as planned by the Contractor and in accordance with all subcontractors or suppliers whose work shall be shown on the bar chart. The Contractor shall submit the bar chart for the Engineer's review and revise it, if required, until approved by the Engineer.

The Contractor shall submit weekly progress status update reports or as otherwise directed by the Engineer. The Contractor shall submit updated bar chart every month. The revised bar chart shall be made in the same form and detail as the original submittal and shall be accompanied by an explanation of the reasons for the revisions all of which shall be subject to approval by the Engineer.

H. ACCELERATED PROJECT SCHEDULE AND COMBINATION OF STAGES. Contractor shall plan and/or stage his/her work schedule using all hours/days available. Contractor is advised that all applicable unit prices shall include, for the purpose of this contract, all overtime costs, premium time costs, shift differentials required to complete construction within the specified "Time(s) of Completion" stipulated in this contract.

Contractor shall be permitted to accelerate this project, to combine stages and/or work sequences. Any such changes shall be shown in the construction schedule, to be furnished in accordance with the General Provisions of the Standard Specifications and the above "SCHEDULING PRESENTATION" Article, and shall be submitted for approval of the Engineer.

Project ID. PVC 341-M

I. NO EXTENSION OF TIME FOR WINTER SHUT-DOWN. Where the Contractor's approved work schedule for installing sidewalk, curb, roadway base and/or pavement falls within the winter period of December 1st through April 1st, the Contractor will NOT be granted an extension of time for completion of this contract due to the winter shut-down period, unless otherwise provided in Schedule "A".

J. START OF CONTRACT WORK. The Contractor is notified that it is the intent of this Agency to commence work promptly after registration of the contract and to order the Contractor to commence work within two (2) months after registration.

K. PRICES TO INCLUDE. No direct payment will be made for costs incurred in complying with the foregoing Special Provisions, unless otherwise provided. Said costs will be deemed to have been included in the prices bid for all the scheduled contract items.

NYCDOT TRAFFIC STIPULATIONS

The Contractor shall execute the portions of the Work within the City Right-of-Way in compliance with the traffic stipulations established by NYCDOT OCMC for this project.



THE CITY OF NEW YORK Department of Sanitation

S. ELIZABETH SEARLE  
Assistant Commissioner  
for Legal Affairs

Bureau of Legal Affairs  
44 Beaver Street  
New York, NY 10004  
Telephone (212) 837-8110  
FAX (212) 837-8243

Department of Sanitation Rules and Regulations Governing  
Non-Putrescible Solid Waste Transfer Stations

INTERPRETIVE MEMORANDUM # 2  
February 14, 1995

*Subject: Temporary Storage and Processing of Construction and Demolition Debris  
by New York City Agency Contractors*

Contractors performing construction work for New York City agencies may be required to excavate dirt, concrete, rock, gravel and similar materials ("construction materials") from a contract site or to remove from a contract site construction materials resulting from construction, demolition, alteration, repair or renovation of structures, streets or buildings. On street construction projects, construction materials required to be excavated or removed may also include asphalt. The purpose of this Interpretive Memorandum is to (a) define the circumstances under which the Department of Sanitation (the "Department") will not deem its Rules and Regulations Governing Non-Putrescible Solid Waste Transfer Stations (the "Rules") to apply to the temporary storage, processing and/or stockpiling (collectively, "stockpiling") of such construction materials and (b) the procedure for ensuring such exemption. It is the responsibility of the contracting agency to oversee its contractors' compliance with the Rules and with this Interpretive Memorandum.


1. When No Transfer Station Permit is Required

Where a City contractor has:

- (a) set aside an area of a contract site for stockpiling construction materials excavated from and/or intended for that site; or
- (b) received written approval from the contracting agency for an off-site stockpiling location,

the Department will not deem such stockpiling location a transfer station and will not require the contractor to obtain a transfer station permit so long as:

- (c) no construction materials or debris from off the contract site are received at the designated location for subsequent transfer to another location (other than the contract site); and
- (d) the temporary stockpiling location is clearly described as such in the contract or clearly approved by the construction agency and designated as such in writing to the Department by the agency; and
- (e) the construction agency represents in writing to the Department that such agency will monitor the temporary stockpiling location and ensure its clean-up and restoration pursuant to the procedures set out in this memorandum.



Help Reduce  
New York's Waste.



*Example: Street Construction Projects*

As part of a contract for street construction, the contractor may be working at one end of a street and using an area at the other end of the street for the temporary stockpiling of construction materials. Both ends of the street are part of the construction contract site. In addition, the contractor may have leased an off-site location for temporary stockpiling of materials, which, following processing, will be reincorporated into the contract site, with some portion of the remainder designated for delivery to a Department disposal facility. Neither location will be regulated by the Department as a transfer station so long as the procedures set out in this memorandum are followed.

2. Procedure for Exception.

Upon a City construction agency's approval of any location to be designated as a temporary processing, storage or stockpiling area, that agency must determine that: (a) its contract with the contractor provides for clean-up and restoration of such area by, for example, the contractor's posting of a restoration bond and/or by contractual set-off and (b) the agency has adequate procedures for monitoring the designated area to ensure that it does not violate the provisions set forth in this memorandum and that such location is cleaned up and restored at the completion of the contract work.

The City construction agency must submit an official letter to the Department acknowledging compliance with both (a) and (b) immediately above and representing that the agency will ensure the contractor's compliance. The letter to be submitted must be in substantially the following form, addressed to the Director, Bureau of Waste Disposal, Department of Sanitation, 125 Worth Street, Room 726, New York, NY 10013:

"The New York City Department of \_\_\_\_\_ (the "Agency")  
has awarded a construction contract to \_\_\_\_\_ (Contractor)  
\_\_\_\_\_ (the "Contractor") for work to be performed at \_\_\_\_\_ (Contract  
Site) \_\_\_\_\_.

a. This Agency has approved the following locations to be used by the Contractor for the temporary storage, processing and/or stockpiling of construction materials (the "Stockpiling Locations") excavated from the construction site or intended for the construction site:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

b. The terms of the contract require the Contractor to clean up and restore the Stockpiling Locations, whether on or off the contract site, at or before the completion of the contract work.

c. This Agency assumes responsibility for the monitoring of Stockpiling Locations to ensure that only materials received from and/or intended for the construction site are stockpiled at such locations and we will enforce clean-up and restoration of such Locations at the end of their use for temporary stockpiling or at the termination of the contract, whichever occurs earlier, through restoration

bonding requirements and/or contractual set-off provisions such that the costs of clean-up and restoration will not become a charge to the Department or the City.

3. When a Transfer Station Permit is Required

A transfer station permit will be required under any circumstances other than those outlined above. Except in the specifically defined circumstances set forth in this memorandum, any operator of a location or facility which receives, processes, stores or stockpiles construction and demolition debris or fill material for purposes of transfer to another location, including to a New York City Department of Sanitation facility, and whether or not under contract to the Department for the delivery of such materials, will be fully subject to the Department's transfer station rules and liable for enforcement for violations.

**THIS PAGE INTENTIONALLY LEFT BLANK**

ATTACH TO CONTRACT DOCUMENTS

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID. PVC 341-M

HISTORIC RICHMOND TOWN  
MUSEUM UTILITY UPGRADES IN CENTER STREET, TYSEN COURT AND COURT PLACE

Together With All Work Incidental Thereto

BOROUGH OF STATEN ISLAND  
CITY OF NEW YORK

ADDENDUM NO. 2

DATED: May 19, 2014

**This Addendum is issued for the purpose of amending the requirements of the contract documents and is hereby made part of said contract documents to the same extent as if it was originally included therein.**

The Standard Sewer Specifications of the Department of Environmental Protection (dated August 1, 2009), Sewer Design Standards of the Department of Environmental Protection (dated September 2007, Revised January 2009), Standard Water Main Specifications of the Department of Environmental Protection (dated August 1, 2009), and the Water Main Standard Drawings of the Department of Environmental Protection (latest revisions), of The City of New York, shall be included as part of the contract documents. These said specifications and standard drawings are hereby revised under the following section headings:

- A. NOTICE TO BIDDERS
- B. AMENDMENTS TO THE STANDARD SEWER SPECIFICATIONS
- C. AMENDMENTS TO THE STANDARD WATER MAIN SPECIFICATIONS

**A. NOTICE TO BIDDERS**

- (1) (A) The Contractor is advised that copies of the Standard Sewer Specifications (dated August 1, 2009), Sewer Design Standards (dated (September 2007) Revised January 2009), Standard Water Main Specifications (dated August 1, 2009), Specifications For Trunk Main Work (dated March 2012) and Water Main Standard Drawings (latest revisions) are available to all prospective bidders at no cost upon presentation of receipt of purchase of Bid Package at the following location:

Department of Design and Construction  
Division of Infrastructure  
Design Services, Specifications, 3<sup>rd</sup> Floor  
30-30 Thomson Avenue  
Long Island City, NY 11101

- (B) The Contractor is advised that copies of the Standard Highway Specifications (Volume I and II) (dated November 1, 2010), Standard Highway Details of Construction (latest revisions), Division of Street Lighting Specifications (latest revisions), Division of Street Lighting Standard Drawings (latest revisions), Standard Specifications for Traffic Signals (latest revisions), and Standard Drawings for Traffic Signals (latest revisions) are available to all prospective bidders for a fee at the following location:

Department of Transportation  
55 Water Street, Ground Floor  
New York City, NY 10041

- (2) The Contractor is notified that it is the intent of this Agency to commence work promptly after registration of the contract and to order the Contractor to commence work within two (2) months after registration.
- (3) The Contractor shall furnish, install, maintain and subsequently remove temporary Protective Tree Barriers. Protective Tree Barriers shall be Type B, unless otherwise directed by the Engineer, and shall be constructed and installed as shown on the Protective Tree Barrier sketch in Department Of Transportation, Standard Highway Details Of Construction, Drawing No. H-1046A, as directed by the Engineer, and in accordance with Department of Parks and Recreation requirements.
- (4) All utility locations and invert elevations are not guaranteed, nor is there any guarantee that all existing utilities, whether functional or abandoned within the project area are shown.
- (5) All existing house connections shall be maintained and supported during construction. The Contractor shall replace any existing house connection damaged as a result of the Contractor's construction operations as ordered by the Engineer at no cost to the City.
- (6) The Contractor is advised that any City owned light poles, traffic signals, traffic signs and encumbrances including, but not limited to, underground conduit displaced as the result of the installation of the new sewers, water mains, catch basins, catch basin connections and appurtenances shall be replaced in kind and as directed by the Engineer. The cost of such work shall be deemed included in the prices bid for all items of work under this contract.
- (7) The Contractor is responsible for any damage to the existing street and traffic signal equipment, including underground conduits and the safety of both pedestrian and vehicular traffic for the duration of the contract.

Should any conduits, cables or foundations need repair due to the Contractor's negligent operations during construction, all work shall be performed according to NYCDOT Bureau of Traffic's Standard Drawings and Specifications at the sole expense of the Contractor.

ADDENDUM NO. 2

PROJECT ID.: PVC 341-M

It is the Contractor's responsibility to secure an approved electrical contractor to perform all traffic signal work (if any). For list of approved electrical contractors, contact Mr. Michael R. LeFosse of New York City Department of Transportation at (718) 786-2236.

- (8) The Contractor is advised that where the existing roadway pavement is designated to be replaced from curb to curb, then no full depth saw cutting of pavement for sewer and water main trenches will be required, except at the limits of full width pavement restoration.

**B. AMENDMENTS TO THE STANDARD SEWER SPECIFICATIONS**

The Standard Sewer Specifications of the New York City Department of Environmental Protection (NYCDEP), dated August 1, 2009, and the NYCDEP Sewer Design Standards, dated September 2007 and Revised January 2009, are hereby amended to include the following New Sections:

Section 54.12 SEP  
Section 56.00

Pump and Dispose of Contents of Septic Tank  
Mechanical, Electrical and Plumbing (MEP)

SECTION 54.12 SEP

Pump and Dispose of Contents of Septic Tank

1. Description. Under this Section, the Contractor shall furnish and install all necessary labor and equip to pump out and dispose of the contents of the septic tanks on-site so designated on the plans and as directed by the Engineer. The cost of Unclassified Excavation and Dense Graded Stone Base Course filler material and seeding shall be paid for under their respective Pay Items, 6.02 AAN, 6.46 and 4.20.

2. Materials. None Required

3. Methods. The septic tank shall be pumped of its entire contents by a licensed septage hauler; the top removed and the bottom of the tank shall be opened or ruptured after being pumped of its content so as to prevent retainage of water and the tank shall be completely filled with dense graded stone base course material to grade. The area disturbed shall be restored with topsoil and seed or as directed by the Engineer. Leach pipes shall be abandoned in place. The distribution box shall have the top removed and the bottom opened or ruptured as well so as to prevent retainage of water and the box shall be completely filled with dense graded stone base course material to grade. The area disturbed shall be restored with topsoil and seed or as directed by the Engineer.

Contractor shall submit current valid licensing credentials and insurance documentation for the septage hauler prior to performing any of the work. Contractor shall comply with, to the satisfaction of the Engineer, all local, State and Federal codes, requirements and regulations regarding the removal and disposal of sanitary sewerage.

4. Measurement. The quantity of septic tanks contents to be measured for payment shall be the number of cubic yards of material actually pumped and removed, measured in place, to the satisfaction of the Engineer.

5. Price to Cover. The contract price bid shall be a unit price per cubic yard and shall cover the cost of all labor, material, pump equipment, transportation, disposal fees, insurance and incidentals necessary to remove the contents of the septic tanks on-site, all in accordance with the plans, the specifications, and directions of the Engineer.

Item No.	Item	Pay Unit
54.12 SEP	PUMP AND DISPOSE OF CONTENTS OF SEPTIC TANK	C.Y.



## SECTION 56.00

## Mechanical, Electrical And Plumbing (MEP)

**56.1. INTENT.** This section describes the services associated with mechanical, electrical and plumbing services (MEP) required for new sanitary sewer facilities within existing buildings and related exterior work.

**56.2. DESCRIPTION.** The Contractor will provide services for the following task items:

- 4" DIP Sanitary Sewer Force Main
- Clean-Out Riser Pipe And Casting
- House Trap And Pit Structure
- New San. Sewer Ejector Pit And Pump System Installed in Basement of the Tavern Building
- Remove Existing Sanitary Sewer Ejector Pump System in Basement of the Museum Building; Replace with Gravity Sanitary Sewer System

Measurement and Payment for each service will be separately described below.

**56.3. MATERIALS.** All materials proposed within existing buildings shall be as described and specified on the plans and details and conform to the latest edition of the NYC Department of Buildings (NYCDOB) Codes for the applicable items, all to the satisfaction of the Engineer. Pipe supports and related piping, valves and fittings shall be as indicated on the plans and in accordance with NYCDOB and NYC Department of Environmental Protection (NYCDEP) requirements.

All exterior sanitary sewer force main shall be 4" Class 56 ductile iron pipe on concrete cradle (similar to standard item 50.91 S4 C06) in accordance with NYCDEP Standard Sewer Specification Sections 5.04 and 2.06. Concrete cradle shall be per NYCDEP Sewer Design Standard dwg. SE-62 adjusted for a 4" diameter pipe.

All concrete, reinforcing steel, structural and miscellaneous steel shall be in accordance with Sections 2.15 and 2.19 of the Standard Sewer Specifications. Pipe to wall penetration seals shall be as indicated on the plans.

Submit catalog cuts of all proposed materials for review and approval by the Engineer.

**56.4. METHODS.** All work and materials shall conform with NYCDOB and NYCDEP standards, specifications and requirements and shall be in accordance with the plans, specifications and directions of the Engineer.

**56.5 METHODS OF MEASUREMENT**

**56.5.1: Unit Price Items:** The quantity to be measured for payment shall be the number of **LINEAR FEET** of 4" D.I.P. Sanitary Sewer Force Main, actually furnished, delivered and installed, measured from the exterior wall of the building to the interior wall face of the first sewer manhole to which it discharges.

**Price to Cover.** The unit price bid per **LINEAR FOOT** shall include shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, including sheeting, excavation, concrete cradle and backfill, all in accordance with the plans, the specifications, and directions of the Engineer.

The quantity to be measured for payment shall be the number of **EACH** of Clean-Out Riser Pipe and Castings and the House Trap and Pit Structures.

**Price to Cover.** The unit price bid per **EACH** unit, including all associated work, actually furnished and installed on site to the satisfaction of the Engineer.

**56.5.2 Lump Sum Items:** For furnishing and installing the New Sanitary Sewer Ejector Pit and Pump System Installed In Basement of the Tavern Building in accordance with the plans, approved shop drawings, specifications and directions of the Engineer, the Contractor shall receive the **LUMP SUM** price bid. The price bid shall be a LUMP SUM and shall include the cost of all labor, materials, equipment and incidentals necessary to complete the work, including excavation, concrete footings, piping, wiring, conduit and all materials as shown on the plans and all submittals, in accordance with the plans, approved shop drawings and specifications, to the satisfaction of the Engineer.

For Removing the Existing Sanitary Sewer Ejector Pump System in the Basement of the Museum Building and Replacing it with a New Gravity Sanitary Sewer System in accordance with the plans, approved shop drawings, specifications and directions of the Engineer, the Contractor shall receive the **LUMP SUM** price bid. The price bid shall be a LUMP SUM and shall include the cost of all labor, materials, equipment and incidentals necessary to complete the work, including excavation, concrete footings, piping, wiring, conduit and all materials as shown on the plans and all submittals, in accordance with the plans, approved shop drawings and specifications, to the satisfaction of the Engineer.

The lump sum prices submitted in the bid schedule for these two item shall be considered all-inclusive and shall cover all work proposed within each building.

**56.6 BASIS OF PAYMENT**

**56.6.1: Unit Price Items:** The Contract price for this item shall be the number of **LINEAR FEET** of exterior 4" D.I.P. Sanitary Sewer Force Main, actually furnished, delivered and installed.

Contract price of **EACH** of Clean-Out Riser Pipe And Castings and the House Traps and Pit Structures shall be the number of **EACH** of Clean-Out Riser Pipe And Castings and the House Traps and Pit Structures actually furnished, delivered and installed.

**56.6.2 Lump Sum Items:** The Contractor shall receive the **Lump Sum** Contract prices bid: for furnishing and installing the New Sanitary Sewer Ejector Pit and Pump System in the Basement of the Tavern Building; and for Removing the Existing Sanitary Sewer Ejector Pump System in the Basement of the Museum Building and Replacing it with a New Gravity Sanitary Sewer System, all in accordance with the plans, approved shop drawings, specifications and the directions of the Engineer.

**56.7 PAY ITEMS**

The following contract Pay Items shall apply:

<b>ITEM NO.</b>	<b>ITEM</b>	<b>UNIT</b>
56.10	4" Dip Sanitary Force Main	LINEAR FEET
56.20	Clean-Out Riser Pipe And Casting	EACH
56.30	House Trap and Pit Structure	EACH
56.40	New San. Sewer Ejector Pit and Pump System Installed In Basement of the Tavern Building	LUMP SUM
56.50	Remove Existing Sanitary Sewer Ejector Pump System In Basement of the Museum Building; Replace with Gravity Sanitary Sewer System	LUMP SUM

**C. AMENDMENTS TO THE STANDARD WATER MAIN SPECIFICATIONS**

The Standard Water Main Specifications of the Department of Environmental Protection (dated August 1, 2009) and the latest revisions of the Water Main Standard Drawings of the Department of Environmental Protection are hereby amended to include the following New Sections:

- |               |   |
|---------------|---|
| Section 68.10 | Water Meter / DCV Pit and Associated Work           |
| Section 68.20 | Furnish and Install House Water Service Curb Valves |

## SECTION 68.10

## Water Meter/DCV Pit and Associated Work

1. Description. Under this Section, the Contractor shall furnish and install water meter, double-check valve (DCV) and related piping, valves and fittings in the sizes indicated, enclosed in a reinforced concrete structure, complete in place, as shown on the Plans and as directed by the Engineer.

2. Materials and Methods. All work and materials shall conform with NYCDEP standards, specifications and requirements and shall be in accordance with the plans, specifications and directions of the Engineer.

All concrete, reinforcing steel, structural and miscellaneous steel related to the meter/DCV enclosure structure shall be in accordance with Sections 5.20 and 5.21 of the Standard Water Main Specifications. Pipe to wall penetration seals shall conform with Section 5.20A of the Standard Specifications. Access doors shall be of the Bilco-type as indicated on the plans or an approved equal. Ladder Rungs shall be copolymer polypropylene plastic, as manufactured by M.A. Industries, Peachtree City, Georgia, or approved equal. Structure details and general arrangement of meter, DCV, valves and other components shall be as shown on the plans.

Water meter with strainer and remote reading device, double-check valve assembly, house control valve, meter outlet control valve, test tee and valve, pipe supports and related piping, valves and fittings shall be as indicated on the plans and in accordance with NYCDEP requirements.

All ductile iron pipe shall be in accordance with Standard Water Main Specification Sections 5.01, 5.02 and 5.03; Gate valves per Sections 5.05 and 5.06.

Work under this Section shall include all sheeting, excavation and backfill necessary to install the water meter/DCV structure, per Standard Water Main Specification Sections 4.02, 4.03, 4.04, 4.05 and 4.06.

3. Samples. Submit catalog cuts of proposed water meter and remote reading device, double-check valve, house control valve, meter outlet control valve, pipe supports, wall pipe sleeve/seal and Bilco-type access doors for review and approval by the Engineer.

The Contractor may submit an alternate precast concrete enclosure design in lieu of cast-in-place design shown on Plans, for consideration by the Engineer. The alternate design shall include a plan and sections locating each component and demonstrating that all interior dimensions and clearances will be maintained in the alternate design. A separate concrete cast-in-place foundation slab may be required to support the precast structure where subgrade conditions dictate, as ordered by the Engineer, at no additional cost to the City.

4. Measurement. The quantity to be measured for payment shall be the number of water meter/DCV pit structures including all associated work, actually furnished and installed on site to the satisfaction of the Engineer.

5. Price to Cover. The contract price bid shall be a unit price per each water meter/DCV pit, including reinforced concrete enclosure structure, Bilco-type access doors, water meter and strainer with remote reading device, double-check valve assembly, house control valve, meter outlet control valve, test tee and valve, ductile iron water main pipe to the limits indicated, pipe supports and all appurtenances, furnished, delivered and installed and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, including sheeting, excavation and backfill of the structure, all in accordance with the plans, the specifications, and directions of the Engineer.

Water main pipe more than 1'-0" beyond the limits of the water meter/DCV structure, as indicated on the plans, will be paid under the applicable pipe items.

Payment for the Water Meter/DCV Pit and Associated Work will be made under:

Item No.	Item	Pay Unit
68.10	WATER METER/DCV PIT AND ASSOCIATED WORK	EACH

SECTION 68.20

Furnish and Install House Water Service Curb Valves

1. Description. Under this Section, the Contractor shall furnish and install water service curb valves in sizes up to and including 2½ inches in diameter for new or replacement house service lines installed in connection with the project, as shown on the Plans or as directed by the Engineer.

2. Materials. Curb valves shall be of the non-rising stem gate valve type, designed for a minimum of 150 psi working pressure, and shall conform with the requirements of NYC Building Code RS16, P107.2(a)9; the "NYC DEP Rules Governing and Restricting the Use and Supply of Water", Rules of the City of New York, Title 15, Chapter 20; and all requirements of NYCDEP.

Valves shall be Stockham No. B-130/B-131, Nibco T-136; Milwaukee 1141 (for valves up to 2" in size); Powell 2712; or approved equal. Curb gate valves shall have bronze body, bronze bonnet, inside screw, non-rising stem, solid wedge disk and threaded ends.

Curb valves shall be provided with a tar-coated iron extension box with valve box cover.

An approved operating key of proper size for each valve shall be furnished by the Contractor.

3. Methods. Curb valves and boxes shall be set in the service pipe, in the sidewalk area within two (2) feet of the curb. Valve box covers shall be set flush with the top of sidewalk/surface grade. Install valve box supports per NYCDEP requirements.

Valve installation work shall conform with the requirements of NYC Building Code RS16, P107.2(a)9; the "NYC DEP Rules Governing and Restricting the Use and Supply of Water", Rules of the City of New York, Title 15, Chapter 20; all NYCDEP requirements; and the manufacturer's instructions.

4. Samples. Submit catalog cuts of proposed curb valves for review and approval by the Engineer.

5. Measurement. The quantity to be measured for payment shall be the number of curb valves of each size specified actually furnished and installed on site, to the satisfaction of the Engineer.

6. Price to Cover. The contract price bid shall be a unit price per each size of curb valve furnished, delivered and installed and shall cover the cost of all labor, material, plant, equipment, insurance and incidentals necessary to complete the work, including valve box and cover, all in accordance with the plans, the specifications, and directions of the Engineer.

Water service tap and service pipe installation work will be paid under separate items.

Payment for curb valves up to 2½" in size will be made under:

Item No.	Item	Pay Unit
68.20 A	FURNISH AND INSTALL 1" CURB VALVES	EACH
68.20 C	FURNISH AND INSTALL 2" CURB VALVES	EACH
68.20 D	FURNISH AND INSTALL 2½" CURB VALVES	EACH

**THIS PAGE INTENTIONALLY LEFT BLANK**

ATTACH TO CONTRACT DOCUMENTS

THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC341-M  
HISTORIC RICHMOND TOWN  
MUSEUM UTILITY UPGRADES IN CENTER STREET, TYSEN COURT AND COURT PLACE

Together With All Work Incidental Thereto

BOROUGH OF STATEN ISLAND  
CITY OF NEW YORK

ADDENDUM NO. 3

DATED: June 9, 2014

THIS ADDENDUM IS HEREBY MADE A PART OF THE CONTRACT DOCUMENTS


1. Historic Richmond Town  
Tysen Court and Center Street Reconstruction Archaeological  
Sensitivity Assessment.  
Prepared by Joan H. Geismar, Ph.D - February 2001
2. Memo Report  
Archaeological Assessment of Museum Utility Upgrade, Historic  
Richmond Town (Center Street, Tysen Court and Court Place)  
Borough: Staten Island.  
Prepared by Joan H. Geismar, Ph.D - September 2013



THIS PAGE INTENTIONALLY LEFT BLANK

# Historic Richmond Town Tysen Court and Center Street Reconstruction Archaeological Sensitivity Assessment

(Capital Project PV341-M)

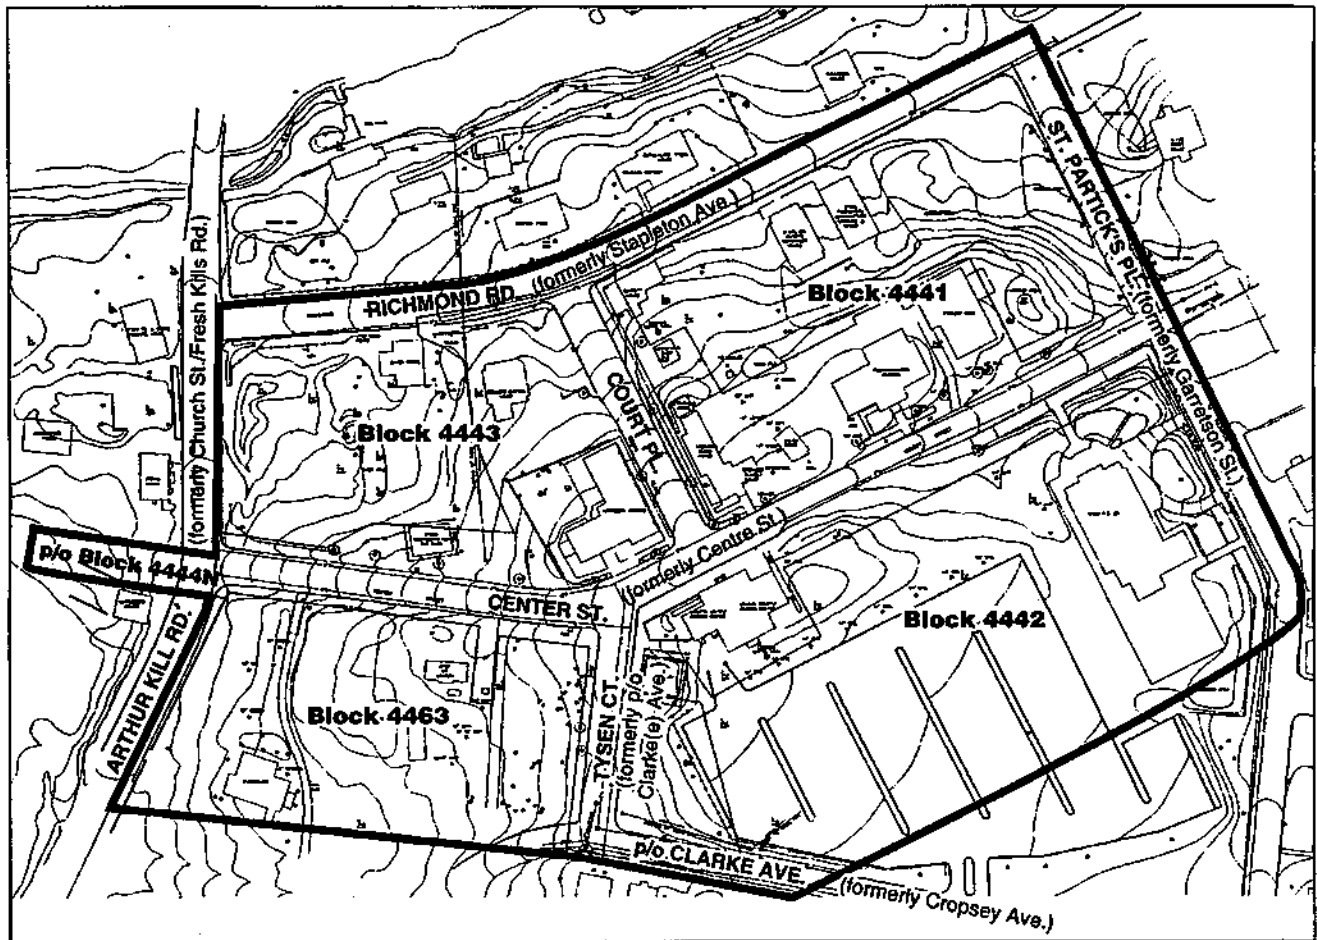

Greater Project Study Area

Prepared for the New York City Department of Design and Construction (DDC)  
Through F.S.T. of New York, Inc.  
Prepared by Joan H. Geismar, Ph.D.  
February 2001

**Historic Richmond Town  
Tysen Court and Center Street Reconstruction  
Archaeological Sensitivity Assessment**

**(Capital Project PV341-M)**

**Prepared for the New York City Department of Design and Construction (DDC)  
Through F.S.T. of New York, Inc.  
Prepared by Joan H. Geismar, Ph.D.  
February 2001**

## ABSTRACT

This assessment of archaeological sensitivity was undertaken in connection with the proposed Staten Island Historical Society, Historic Richmond Town, Tysen Court and Center Street Reconstruction (Capital Project PV341-M). The study, which was prepared for the New York City Department of Design and Construction (DDC) through F.S.T. of New York, Inc., evaluates part of the core area of Historic Richmond Town on Staten Island (part of Blocks 4441, 4442, 4443, 4444N, and 4463). Original research was coordinated with the findings of an 1989 archaeological planning study to address the issues of potential archaeological sensitivity where utility installation is planned. Key to the assessment are tables and accompanying maps identifying and locating existing and known former structures and features within the area of potential effects (APE).

Four areas of potential or known sensitivity that might be impacted during construction have been identified. One is the potential for the remains of historic structures in the bed of Center Street in the area known as the One-Acre Lot. Another is the potential for burials associated with successive churches once located on the south side of Center Street near Arthur Kill Road (Block 4463), some of them possibly dating to the 18th century. Another is the potential for unknown burials associated with the Rezeau-Van Pelt Cemetery (Block 4463) that might extend beyond the cemetery as defined since the mid-19th century. And finally, but perhaps most importantly, are any unknown archaeological features that might be present in the APE and are to be expected at a long-occupied village such as Historic Richmond Town. Monitoring during construction and preconstruction testing in selected areas are recommended, as is avoidance and protection of the Rezeau-Van Pelt family cemetery located next to an area of impact.

## TABLE OF CONTENTS

ABSTRACT .....	i
METHOD .....	1
EXISTING CONDITIONS .....	5
CEMETERIES .....	11
The Rezeau-Van Pelt Family Cemetery (Block 4442) .....	11
The Burial Ground of the Reformed Dutch Church (Block 4463) .....	15
The Richmond Cemetery (Block 4442) .....	16
FINDINGS .....	17
Block 4441 .....	17
Block 4442 .....	17
Block 4443 .....	18
The One-Acre Lot .....	18
Block 4444N .....	18
Block 4463 .....	19
SUMMARY AND RECOMMENDATIONS .....	19
BIBLIOGRAPHY .....	21
FIGURES	
1. Project Location (USGS Arthur Kill Quadrangle 1981) .....	2
2. Project Study Area .....	3
3. Project Impact Area .....	4
4. Center Street looking east from the Third County Courthouse, photo. ....	6
5. Center Street looking west from the P.S. 28, photo. ....	6
6. Tysen Court looking south toward Clarke Avenue, photo. ....	7
7. Court Place looking north to Richmond Road from Center Street, photo. ....	7
8. Court Place looking south to Center Street from Richmond Road, photo. ....	7
9. The Bennett House looking northeast on Court Place, photo .....	9
10. The Bennett House from Richmond Road, photo .....	9
11. Rezeau-Van Pelt family cemetery from Tysen Court, photo .....	10
12. Rezeau-Van Pelt family cemetery from the museum parking lot, photo ....	10
13. Historical Museum, corner of Center Street and Court Place, photo .....	12
14. Backyards of houses on Richmond Road, photo .....	12
15. File Map 1854 .....	13
16. File Map 1868 .....	15

TABLE OF CONTENTS (continued)

APPENDIX A Known Structures and Features in the APE .....	23
Table 1. Block 4441 .....	24
Table 2. Block 4442 .....	27
Table 3a. Block 4443 .....	29
Table 3b. The One-Acre Lot .....	30
Table 3c. Block 4444N .....	31
Table 4. Block 4463 .....	33
Figure A1 Block 4441, Court Place, and Part of Center Street .....	26
Figure A2 Block 4442, Tysen Court, Part of Center Street, Part of Clark Avenue .....	28
Figure A3 Block 4443, The One-Acre Lot, and Block 4444N, and Part of Richmond Road, Part of Center Street .....	32
Figure A4 Block 4463, Part of Center Street, and Tysen Court .....	34
 APPENDIX B Deaths/Burials/Funerals from Records of the Reformed Dutch Church, Richmond, Staten Island 1854-1886 and the Moravian Cemetery, New Dorp 1885 .....	35
Table 1. Alphabetical Listing of Recorded Richmond Church Deaths 1854-1879 .....	36
Table 2. Chronological Listing of All Recorded Deaths/Burials/ Funerals 1817-1879 .....	38
 APPENDIX C Summary of APE Structure and Feature Dates by Century .....	41
Table 1. All Structures and Features in APE .....	42
Table 2. Extant Structures and Features in APE .....	42

Researched/Written by Joan H. Geismar, Ph.D.  
 Research Assistant/Tables Production Shelly Spritzer  
 Graphics Amy Geller

## INTRODUCTION

The study presented here was undertaken in connection with the proposed Staten Island Historical Society, Historic Richmond Town, Tysen Court and Center Street Reconstruction (Capital Project PV341-M). It offers an archaeological sensitivity assessment of part of the core area of Historic Richmond Town on Staten Island (part of Blocks 4441, 4442, 4443, 4444N, and 4463; Figures 1 to 3) and was prepared for the New York City Department of Design and Construction (DDC) through F.S.T. of New York, Inc. It was researched and written by Joan H. Geismar, Ph.D., assisted by Shelly Spritzer.

Research addressed the concern that the proposed undertaking, which will entail the laying of underground utilities and tie-ins to existing and new drains, may impact archaeological resources in one of Staten Island's most historic areas. Based on the 1992 "Restoration Plan for Richmondtown,"<sup>1</sup> it was assumed that potential impacts would be limited mainly to three streets: Center Street, Tysen Court, and Court Place. An earlier archaeological assessment (1989) had identified these streets as having a "moderate to high" probability for archaeological sensitivity.<sup>2</sup> However, the proposed infrastructure improvements will extend beyond these streets into portions of five blocks (see Figure 3) where potential sensitivity was also found to be moderate to high.<sup>3</sup> These earlier findings, based solely on documentary research, were incorporated into the assessment presented here.

The 1989 archaeological assessment alluded to above, "An Archaeological Planning Model of Richmondtown Restoration, Staten Island, New York," researched and written by Sherene Baugher, Edward J. Lenik, Stephen Barto, Kate Morgan, Daniel N. Pagano, and Robert W. Venables, was a major resource in evaluating the archaeological sensitivity of the currently proposed undertaking. In addition to information from this comprehensive and detailed document, several historical issues were addressed specifically for this new study. Mainly, research focused on extant and long-gone cemeteries although other issues were also addressed. In some instances, this inquiry refined the findings of the 1989 study. However, that document proved admirably thorough, and the study presented here concentrated on synthesizing the material it contained augmented by new research and information generously provided by William McMillen, Director of Restoration at Historic Richmond Town.<sup>4</sup>

## METHOD

To develop a comprehensive but focused archaeological sensitivity assessment, a series of four maps were generated that cover the area of potential impact (see Appendix A Figures A1-A4), referred


---

<sup>1</sup>Restoration Plan 1992


<sup>2</sup>Baugher et al. 1989:613.

<sup>3</sup>Baugher et al. 1989


<sup>4</sup>Mr. McMillen kindly made his notes and archives available and shared invaluable information gleaned from a long personal and professional association with the town and its history.

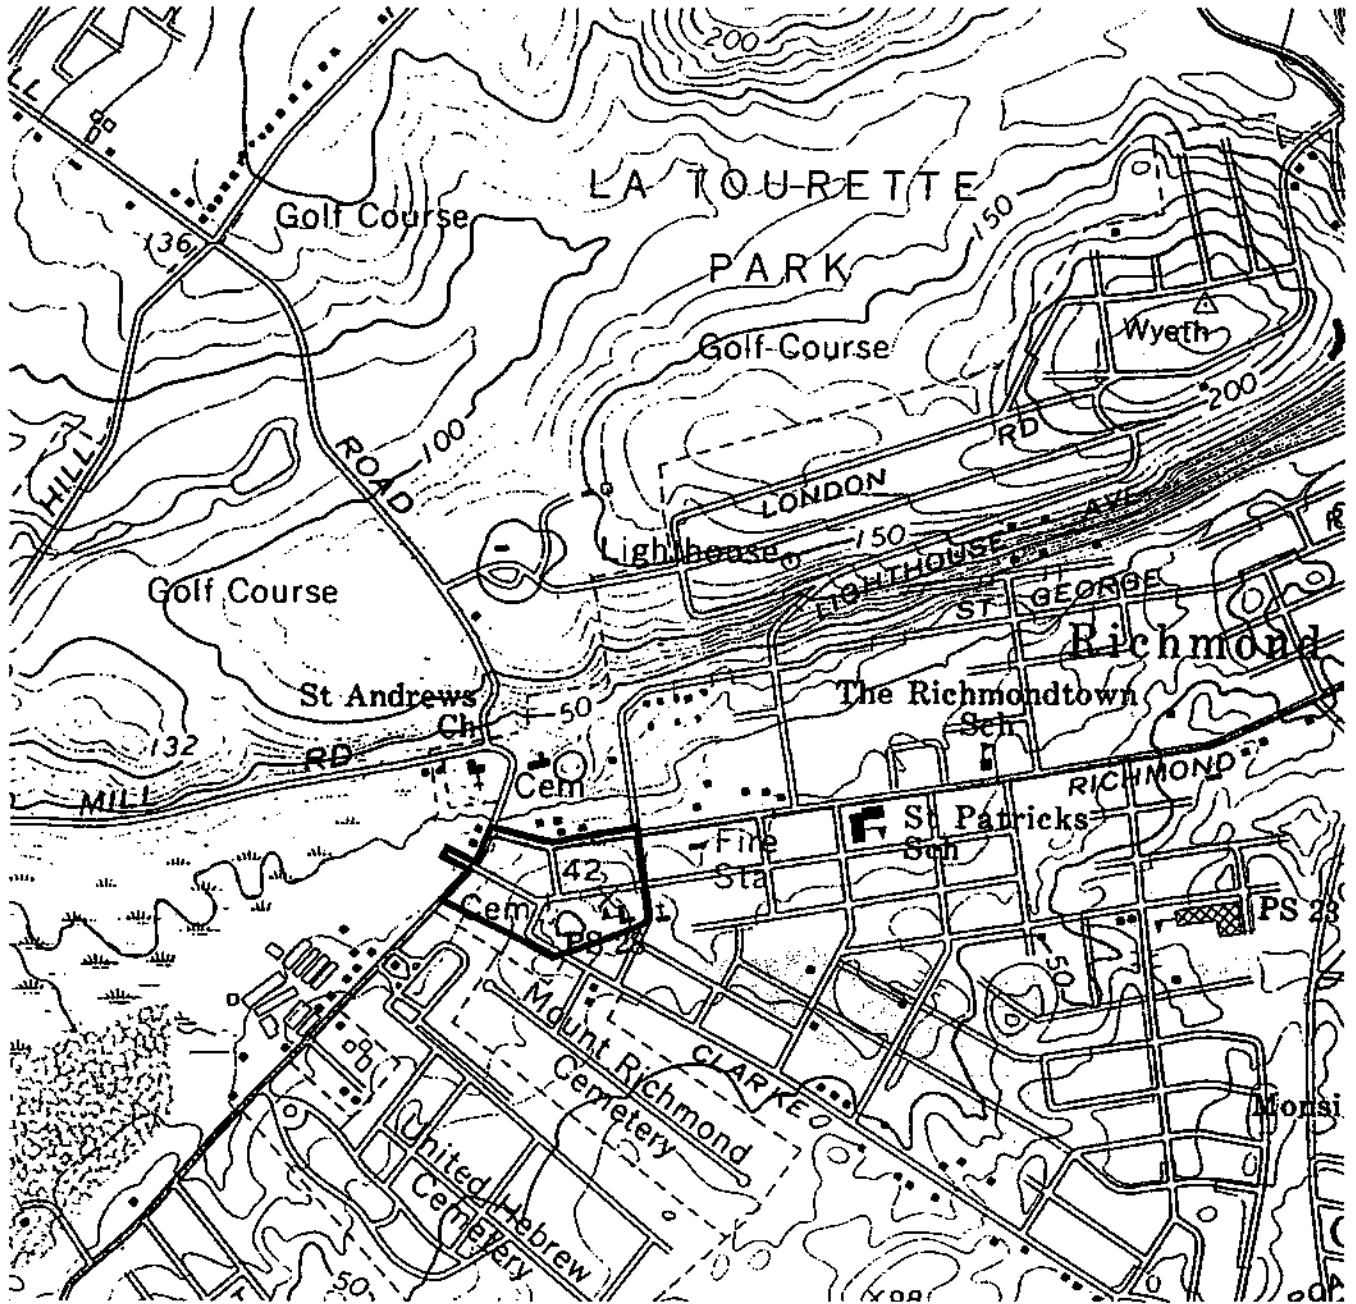




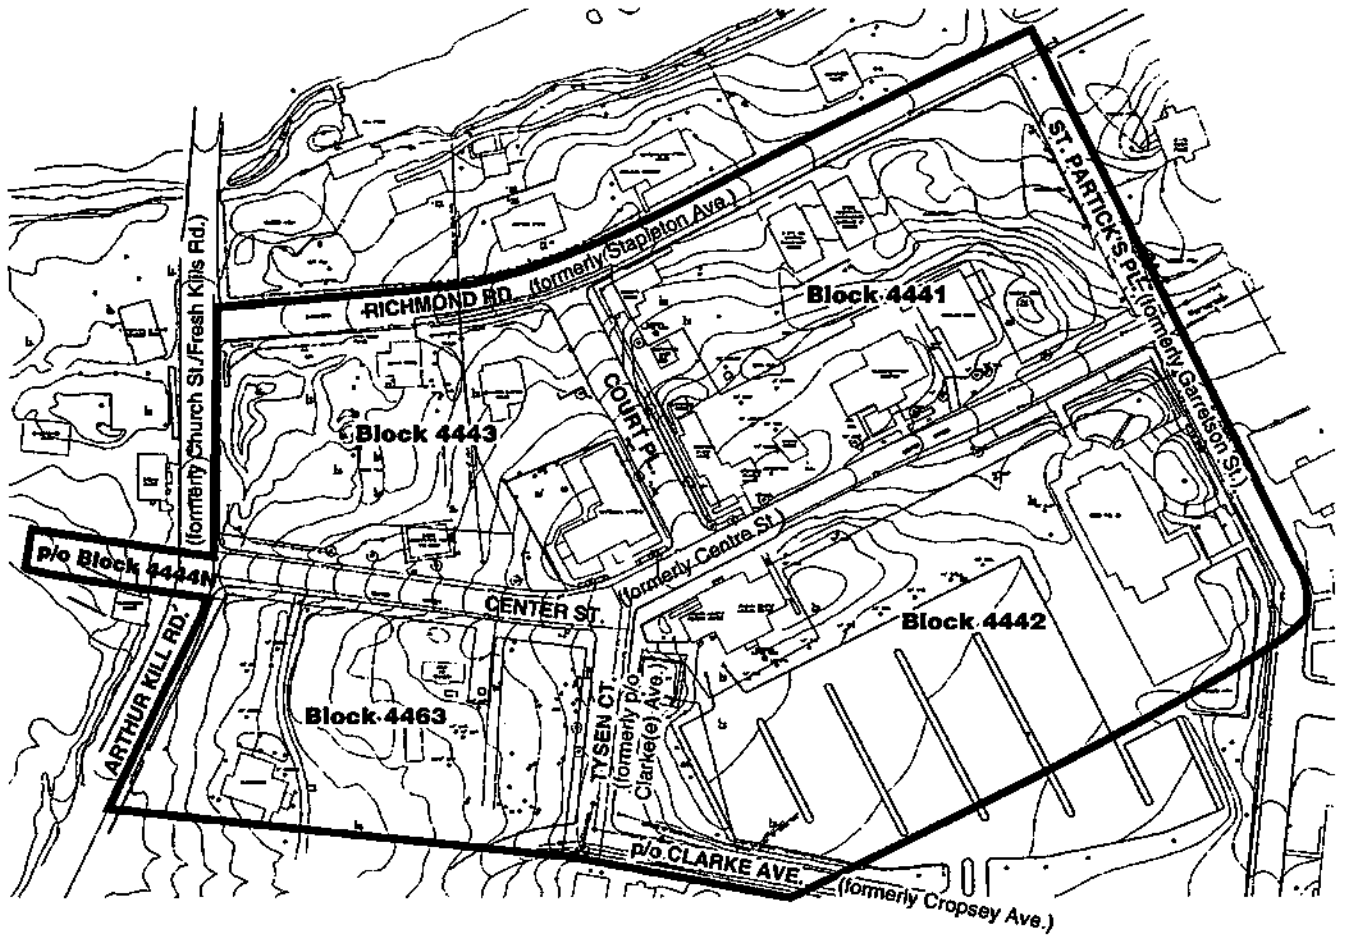

study area



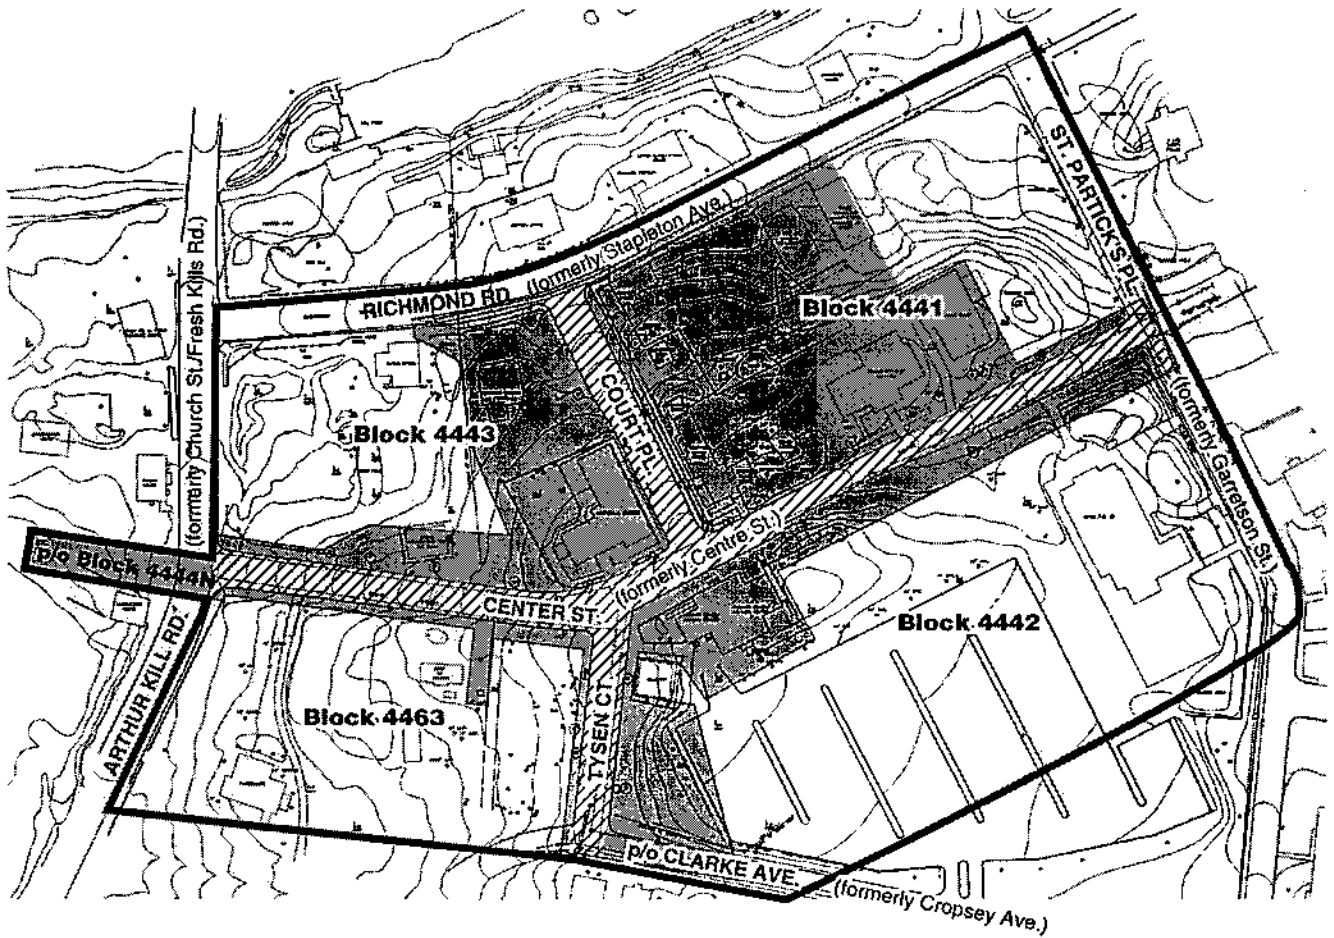

- study area
- original contract area
- contract limits defined in project maps



to in the text and on the maps as the APE (Area of Potential Effects). These maps also include the larger, four-block study area of approximately four blocks to create a context. The base for these graphic representations are the 1910/1911 "Topographical Maps of Richmond County" (Nos. 54 and 61) and the 1986 Wohl and O'Mara "Topographic Survey of Richmondtown Restoration Area." The information found on these figures was then detailed in tables that list, describe, and date any known structures or features in the APE as well as selected structures or features beyond it that are associated with those in the APE (see Appendix A Tables 1-4). Included are standing structures that may be affected by the proposed construction and those long gone. In addition to the 1989 archaeological planning model and discussions with Bill McMillen, research was carried out at the Staten Island Historical Society, at the Topographic Bureau of the Richmond County Borough President's Office, the Offices of the Richmond County Clerk and County Register, the New York Public Library, the New York Historical Society, the Moravian Cemetery on Staten Island, the Collegiate Church in New York City, and at the New Brunswick Theological Seminary in New Brunswick, New Jersey (with thanks to Russell L. Gasero, Archivist, Archives of the Reformed Church in America). A conversation with Richard Clark, a CUNY graduate student, regarding recent excavations he conducted at Historic Richmond Town, was also helpful.<sup>5</sup>

## EXISTING CONDITIONS

Historic Richmond Town is unique for many reasons. Among them is its history as the seat of the late 18th- and early 19th-century government of Staten Island, its demise as the island's, and the county's, civic center (in favor of St. George), its years of benign neglect, and its metamorphosis into an historic town *cum* museum: here original 18th-century structures co-exist with the more recent buildings of a living community, the newly-built and renovated buildings of a museum, and the relocated historic buildings from various eras saved for posterity. Its history, which can be traced to the late 1600s, is obviously reflected in the buildings that make-up the village reconstruction, but it is also represented by the below-ground remains of the evolving town. These out-of-sight foundations and deposits comprise the archaeological resources that abound in Historic Richmond Town.

The profusion of these archaeological resources was highlighted during field testing in 1999 undertaken on both the north side of Richmond Road and the west side of Arthur Kill Road, beyond the current area of concern. Two long backhoe-excavated trenches were opened to identify below-ground resources in anticipation of a drainage project. The two-day field effort revealed twelve stone or brick and stone features that were mainly foundation walls of long-demolished buildings, only some of them anticipated through historical research.<sup>6</sup>

As noted in the introduction, the three streets that will be greatly impacted by the proposed undertaking--Center Street, Tysen Court, and Court Place (Figures 4 - 8)--are located in the core area of Historic Richmond Town.<sup>7</sup> At this writing, there are twenty-five standing structures on the blocks

---

<sup>5</sup>Clark 2000:Personal Communication

<sup>6</sup>Geismar 1999

<sup>7</sup>A small section of St. Patrick's Place will also be impacted, but not in an area of concern



**4** View east on Center Street from the Third County Courthouse (right). Across Center Street are the Stephens-Black House (left), the Tinsmith Shop (center), and a storage shed (right). (Geismar 8/2000)



**5** View west on Center Street from steps of P.S. 28, now a museum administrative building. The Stephens-Black House (arrow) is in the distance on the right. (Geismar 8/2000)



6 Tysen Court looking south toward Clarke Avenue. (Geismar 8/2000)



7 Court Place looking north toward Richmond Road from Center Street. The Historical Museum (former County Clerk's Office) is to the left. The Stephens-Black House and store is to the right. (Geismar 8/2000)



8 Court Place looking south from Richmond Road toward the Third County Courthouse on Center Street. The Bennett House porch is visible to the left; the Stephens-Black House on Center Street is left of the Court House and the Historical Museum is to the right. (Geismar 12/2000)

included in the study area partially defined by this road network, sixteen of them within the APE. One of those in the APE, the Bennett House located at the intersection of Court Place and Richmond Road (Figures 9-10), is scheduled for alteration during the proposed improvements. The building, constructed in 1837, has been modified over time (see A in Appendix A Table 1).<sup>8</sup> Surrounded by the APE but not within its defined limits is the Rezeau-Van Pelt family cemetery that dates to the 18th century (see F in Appendix A, Table 2). This is a small family burial ground located behind the Third County Courthouse, now a museum building on the east side of Tysen Court ( Figures 11-12). As currently defined by a mid-19th century fence, the cemetery will not be directly impacted by the proposed construction, but its early historical limits have not been definitively established. Nearby was yet another cemetery, one associated with the 19th-century Reformed Dutch Church of Richmond erected in 1808, and possibly with an earlier Presbyterian and Reformed Dutch Church on the same site that was active from 1769 until it was burned during the Revolutionary War. This defunct burial ground, proven active at least by 1817 (see below), may have been partially located within the APE (see A and B in Appendix A Table 4 and discussion of Cemeteries below).

Structures that no longer exist in the APE, but that may have archaeological components, include the 18th-century buildings that formerly stood on the One-Acre Lot (see Nos. 1-3 Appendix A Table 3b). This was a long, narrow plot lying between the northern and southern limits of two early patents (the Ryder Patent to the south and the Hubbard Patent to the north). Center Street, run in 1837, now covers most of this property believed to be the former site of a tavern, house, and barn.<sup>9</sup> It appears that the bed of Center Street has only been minimally disturbed by the previous placement of utilities that now service standing structures and once served others that have been demolished.<sup>10</sup> However, it should be noted that limited archaeological exploration by high school students in the 1970s did not uncover any evidence of these historic 18th-century structures.<sup>11</sup>

Another potentially sensitive area is a small strip of land that will be impacted during the proposed utility placement on Block 4444N (see Figure 3). One 18th-century and two 19th-century structures once stood here, next to the Voorlezer's House. The Voorlezer's House, Historic Richmond Town's oldest surviving building, arguably Staten Island's first religious structure now moved 15 feet back from its original site, will not be impacted by the proposed construction. In addition, in a classic example of "what you see now is not necessarily what used to be," are all the structures indicated on historical maps and on 1910/1911 topographical maps but are no longer extant. While remnants of many of these structures or features were excavated in the 1960s and 1970s—particularly privy pits (outhouse pits) found on the 1910/1911 topographical maps<sup>12</sup>—many more have not been addressed. As noted in the Method section, the locations of known potential features are graphically illustrated in Appendix A Figures A1 to A4 and those in the APE are described in Appendix A Tables 1 to 4.

---

<sup>8</sup>See Odiseos, Phyllis, 1972a, 1972b for detailed information about the Bennett House

<sup>9</sup>e.g., Baugher et al. 1989:613

<sup>10</sup>McMillen 2000:Personal Communication

<sup>11</sup>Baugher et al. 1989:82


<sup>12</sup>McMillen 2000:personal communication



**9** The Bennett House looking northeast from Court Place. The lower story and ground levels will be altered. (Geismar 12/2000)



**10** The Bennett House from Richmond Road. (Geismar 12/2000)

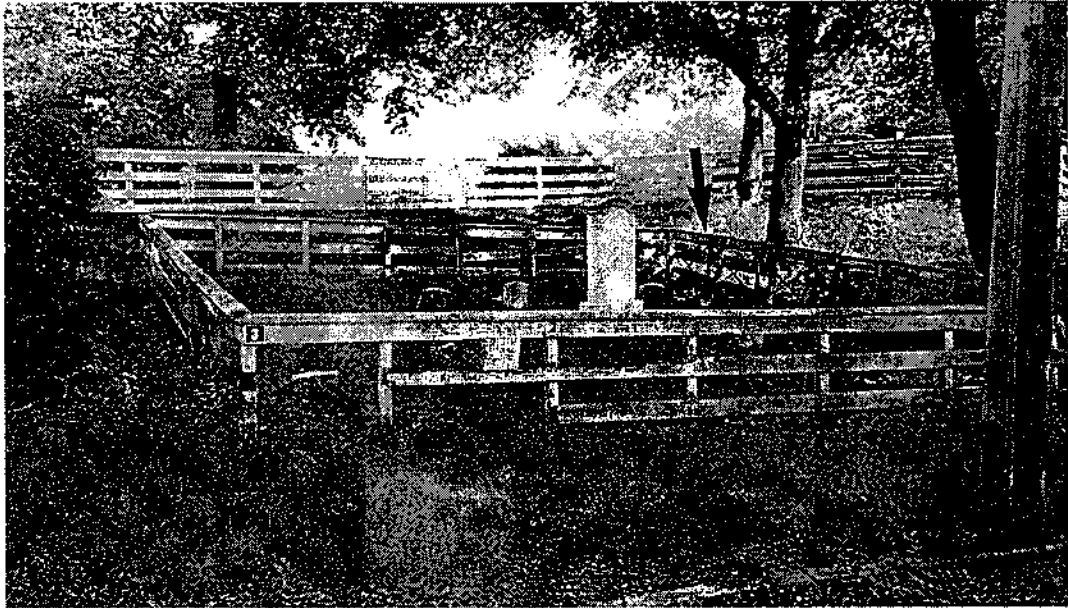

**11** The Rezeau-Van Pelt family cemetery. View is looking east from Tysen Court. Note remnants of the mid-19th century iron fence now protected by a wooden fence. (Geismar 8/2000)



**12** View east from the museum's elevated parking lot. The Rezeau-Van Pelt family cemetery is to the right. The mid-19th century iron fencing is again visible in this view (arrow). (Geismar 8/2000)



And finally, it should be noted that the remnants of unknown structures could be located anywhere in the APE in what are now the backyards of standing buildings, such as the expanse behind the historical museum on Center Street where the Crocheron Privy, relocated from Woodrow Road, was reconstructed in 1987, but which is otherwise now-vacant land (Figures 13 and 14).

## CEMETERIES

As mentioned previously, the cemeteries of Historic Richmond Town were a focus of research. One, the aforementioned Rezeau-Van Pelt family cemetery, is still located on the east side of Tysen Court; another, the burial ground associated with the defunct Reformed Dutch Church of Richmond and perhaps an earlier church on the same site,<sup>13</sup> is no longer evident, while yet another, the "Richmond Cemetery," which is named and defined on a mid-19th-century county file map<sup>14</sup> (see Figure 15), apparently never existed at all.<sup>15</sup>

### The Rezeau-Van Pelt Family Cemetery (Block 4442)

This small burial ground on the west side of Tysen Court as currently delineated will not be impacted by the proposed undertaking. It is now defined by the mid-19th century iron fence still surrounding it, and this, in turn, is protected by a wooden fence constructed in 1973 when the museum's parking lot was built (see Figures 11-12).<sup>16</sup> Its current configuration was established at least by the mid-19th century, but since the cemetery dates from the late 18th century, its original size and shape may be concerns. For example, if it was not always fenced, the location of early burials could be an issue.

The cemetery site, part of a large holding, was in Rezeau possession by 1705, but the earliest known headstones, said to have been legible in 1900, date from the late 18th century. Fourteen head and foot stones or fragments were documented sometime after 1972; six of these were thought to be in their original locations.<sup>17</sup> The cemetery is depicted on an 1854 file map of a subdivision of property owned by Harmon B. Cropsey and Associates (Figure 15). On this plan it occupies a corner of the proposed Richmond Cemetery (see below).

While this historical burial ground will not be directly impacted by the proposed construction, every effort should be made to protect it during construction and staging activities associated with the proposed construction. Moreover, the issue of unknown burials beyond the defined boundary should be a consideration.

---


<sup>13</sup>Baugher et al. 1989:146

<sup>14</sup>File Map 1854:353

<sup>15</sup>McMillen 2000:personal communication

<sup>16</sup>Notes in the Staten Island Historical Society Library (Steve Barto N.D.)

<sup>17</sup>W. T. Davis cited in the above-referenced notes in the cemetery file in the Staten Island Historical Society Library (Barto N.D.).

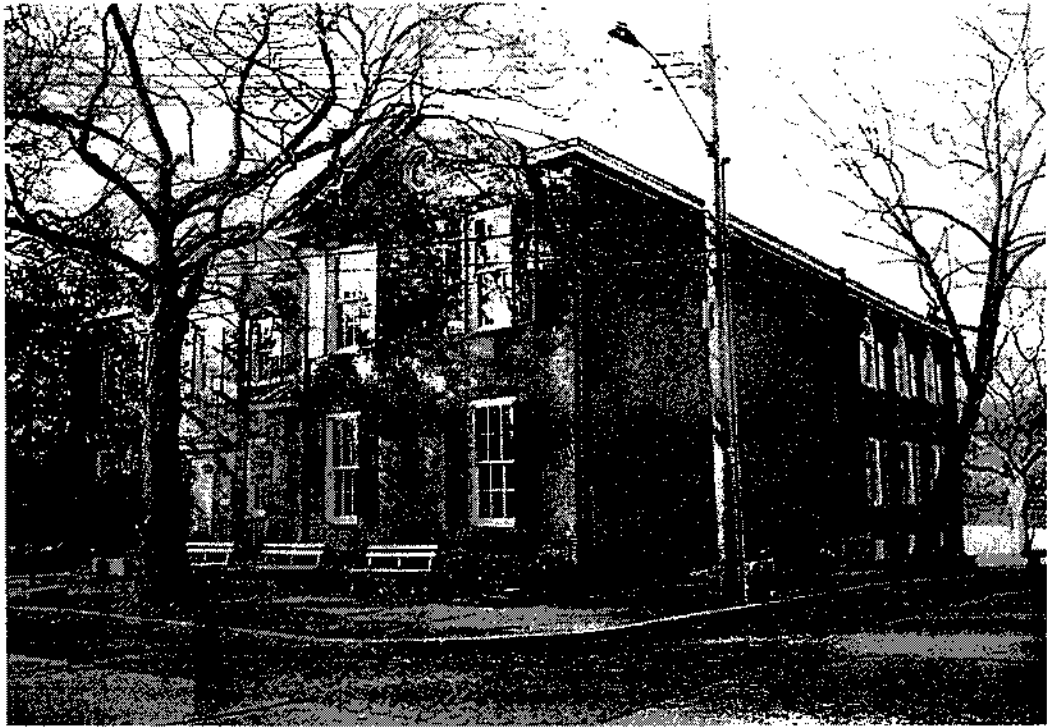


**13** The Historical Museum, the former mid-19th century County Clerk's Office, located on the northwest of Center Street and Court Place (also seen in figures 7 and 8). Note the windowed rear addition added in the 1930s. (Geismar 12/2000)





**14** Backyards of houses on Richmond Road located behind the Historical Museum seen to the left. The mid-19th century Crocheron Privy (arrow) was moved from Woodrow Road and reconstructed at Richmond Town in 1987. (Geismar 12/2000)

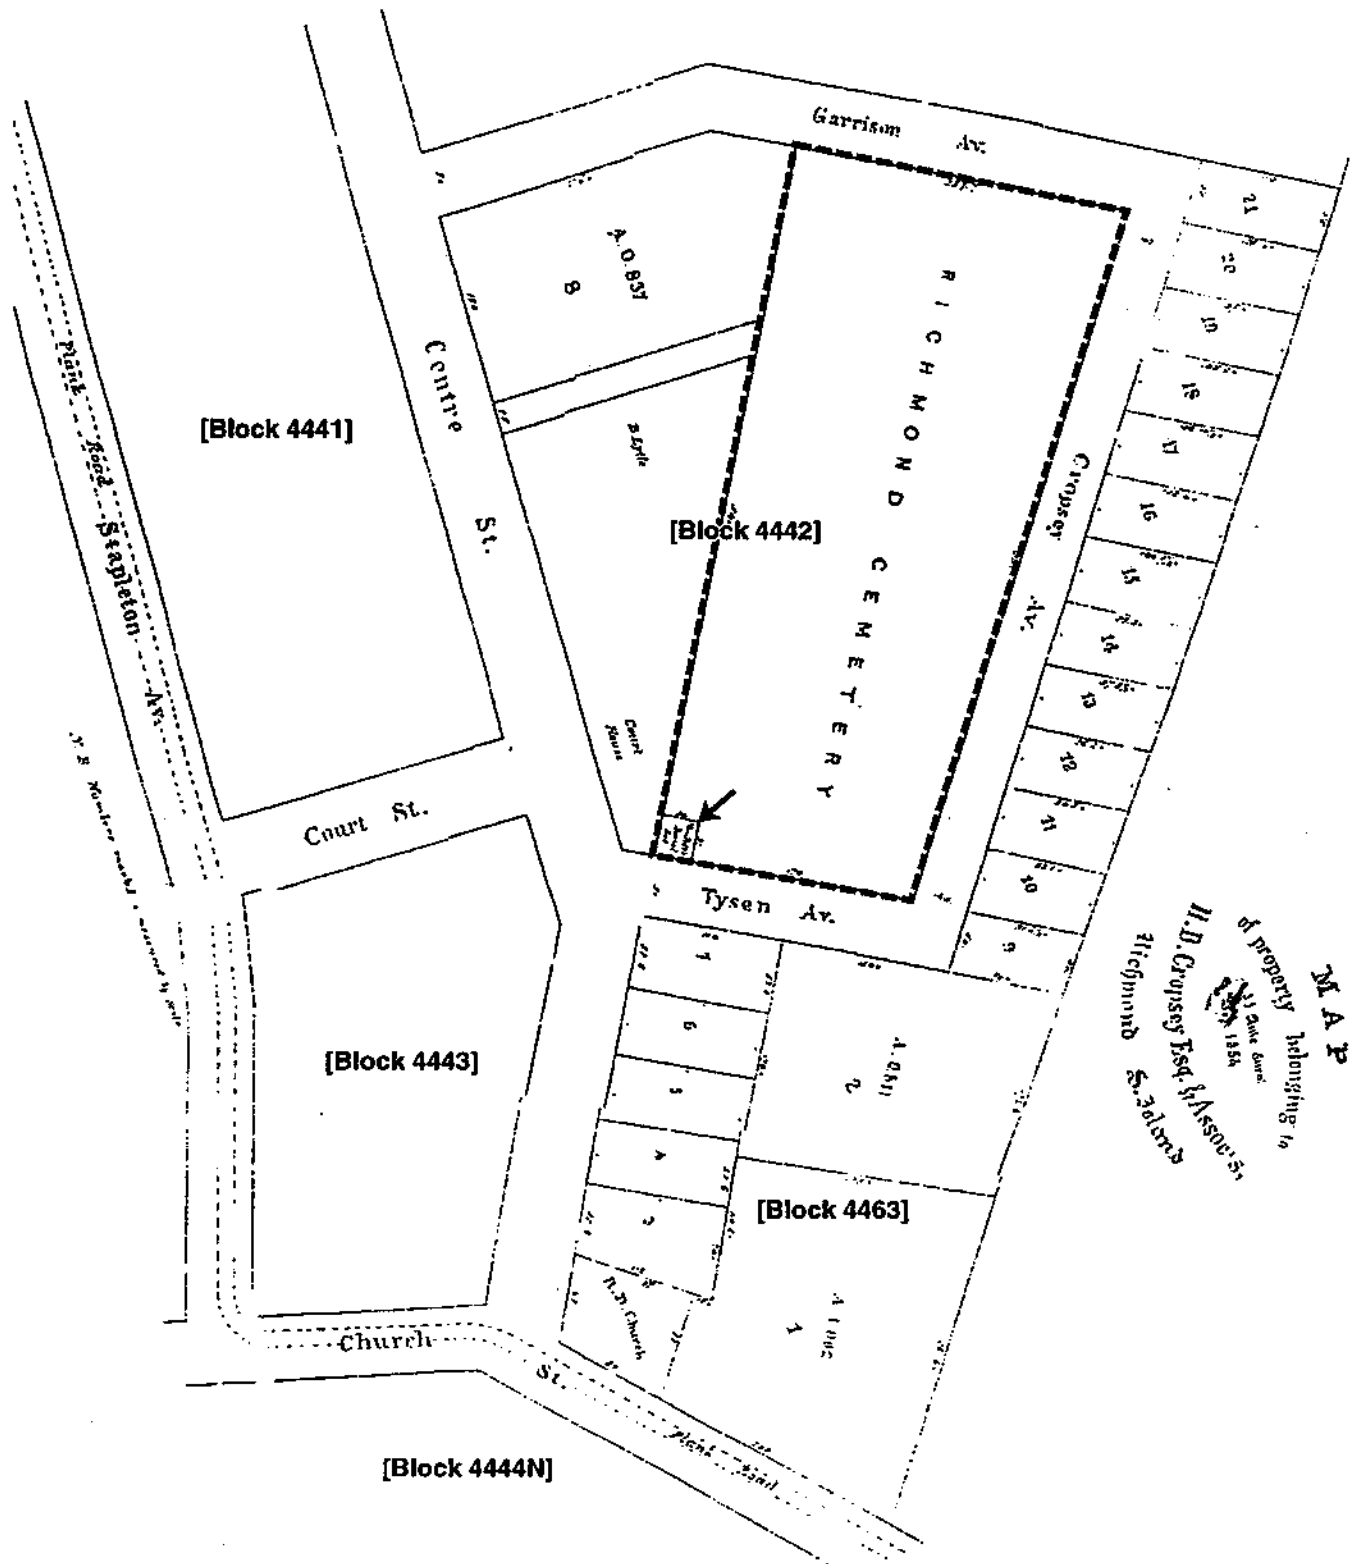**HISTORIC RICHMOND TOWN** Extant and Proposed Cemeteries in Study Area  
1854 (Based on File Map 353)



**MAP**  
of property belonging to  
H.D. Crupsey, Esq.  
Richmond  
Surveyed

 Rezeau-Van Pelt cemetery  
 proposed cemetery (1854)

no scale 

### The Burial Ground of the Reformed Dutch Church (Block 4463, Lot 13)

A concern in this assessment was the former cemetery of the 19th-century Reformed Dutch Church once located on the southeast corner of the intersection of Center Street and Arthur Kill Road, then aptly named Church Street (Block 4463).<sup>18</sup> A schematic church structure is depicted on an 1868 file map (Figure 16), but not its associated cemetery which may have extended into the APE. As mentioned previously, the church was built in 1808, about three decades after an earlier church building had been destroyed by the British during the Revolutionary War. This earlier church may originally have housed a Presbyterian congregation in Stony Brook until the structure was moved to Richmond in 1769 to serve a combined English Presbyterian and Dutch Protestant congregation.<sup>19</sup> It is possible this older church may also have had an associated burial ground.

In an attempt to determine the potential for disturbing unknown human remains during the proposed construction, research focused on this defunct burial ground. Although its size, exact location, and age are speculative, burials were known to be removed from the cemetery to the relatively nearby Moravian Cemetery in New Dorp in 1885 when the church was officially disbanded.<sup>20</sup> By 1887, the church building had been moved to become a carriage repository located in the APE east of the Stephens-Black House on Block 4441 (see V in Appendix A, Table 1 and Figure A1).

Records of the Moravian Cemetery proved fruitful in this research: transfer records indicate that twenty-one bodies were removed from "The Reformed Dutch Church at Richmond Staten Island" between November 28 and December 7, 1885.<sup>21</sup> Fourteen of those removed had been interred long before November 1853 when the Richmond Church became independent of the Port Richmond congregation.<sup>22</sup>

The earliest burial in the reinterment record, Jasper Cropsy who died in 1817, is followed by Henry Miller in 1824. Harmon B. Cropsey, a promoter of mid-19th-century Richmond development who died in 1859--apparently the force behind the above-mentioned Richmond Cemetery--is among those reinterred in the Moravian Cemetery.<sup>23</sup>

In November 1853, the congregation at Richmond had separated from the Reformed Dutch Church

---

<sup>18</sup>At that time, both Richmond Road and Church Street were plank roads (see File Map 1868; Figure 16).

<sup>19</sup>Baughner et al. 1989:146, 158; Richard Clark, a CUNY graduate student, conducted limited excavations in this area, but did not find any evidence of either church structure (Clark 2000:personal communication)

<sup>20</sup>McMillen 2000:personal communication


<sup>21</sup>Ostrander 1885; see Appendices B and C for the reinterment records from the Moravian Cemetery.

<sup>22</sup>Appendix B; Anon. 1853-1886; at this writing attempts to locate earlier records for the Reformed Dutch Church at Richmond have been unsuccessful.

<sup>23</sup>Reinterment Record, 1885

H. B. CROPSEY ESQ. AND ASSOCIATES,  
in  
RICHMOND VILLAGE,

STATEN ISLAND

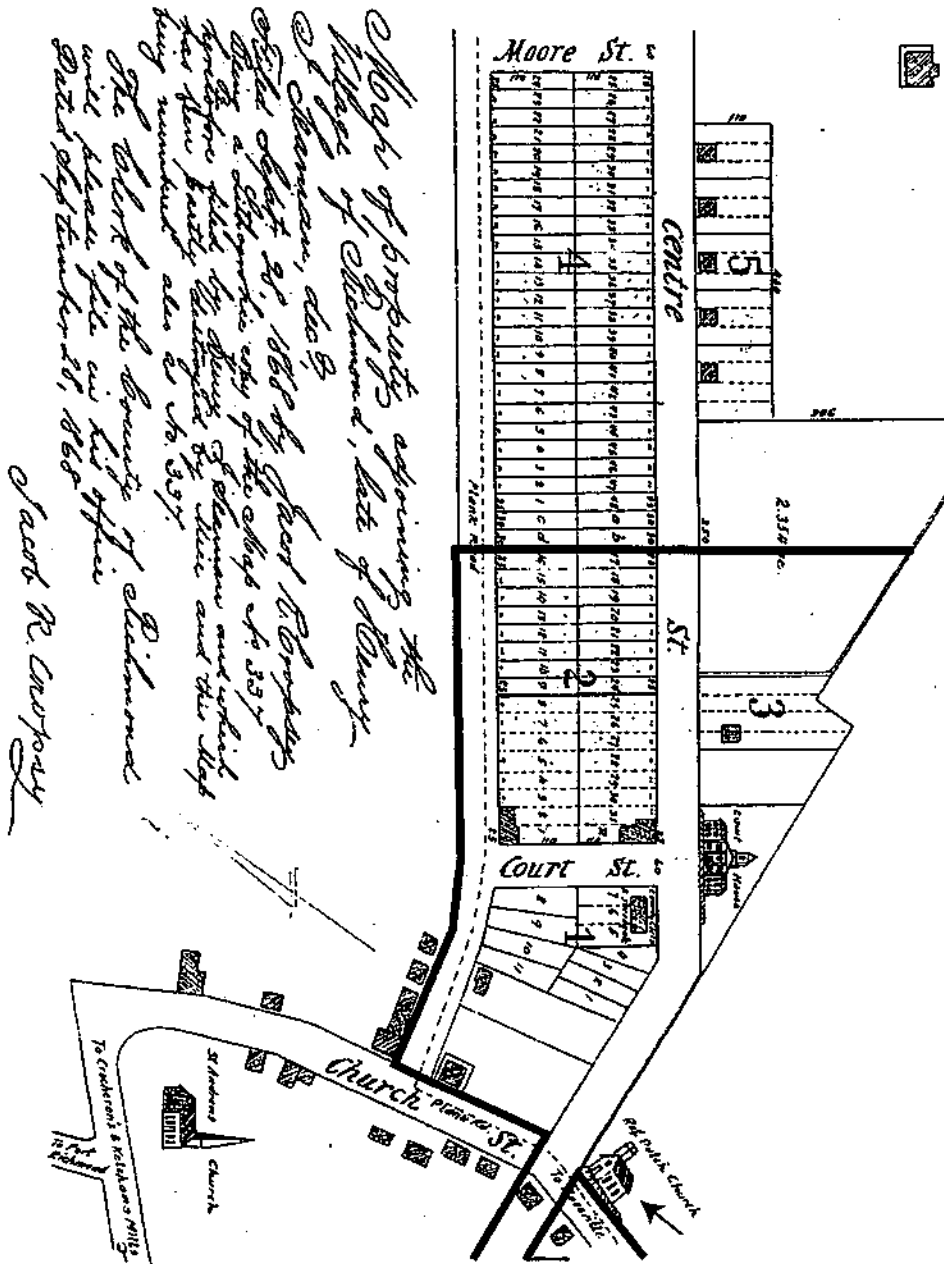

— project area boundary (partial)  
 ↗ Reformed Dutch Church

no scale ↗

at Port Richmond whose pastor had served both congregations.<sup>24</sup> The records of the congregation at Richmond document at least fifty-four deaths among its members from 1854 through 1879,<sup>25</sup> but, unfortunately, none were definitively buried in the church yard.<sup>26</sup> Moreover, none of the deceased recorded in the church records are found in the reinterment record of the Moravian Cemetery. This could indicate that not all burials were removed, or it may reflect removals to other, unnamed cemeteries, but this is a question at this writing. Circumstances may be similar to those found at the 19th-century cemetery formerly associated with the New York Naval Hospital at the Wallabout in Brooklyn. At that cemetery, active from about 1834 until 1910, over 500 burials documented through research done in 1997 were unaccounted for when 987 individuals were removed and reinterred at the Cypress Hills National Cemetery in 1926.<sup>27</sup> The reasons for this oversight speculatively included incomplete record keeping, badly marked burials, and the vagaries of time. Although the Reformed Dutch Church cemetery at Richmond was smaller than the one associated with the Naval Hospital, the same forces were undoubtedly in effect.

The church burial ground is defined as an extensive area surrounding the second Reformed Dutch Church in maps compiled for the 1989 archaeological planning study.<sup>28</sup> Research undertaken for this report, however, indicates that the burial ground was located on the west side of the church. This was established by the specification and estimate provided to the "Consistory of the Reformed Dutch Church, Richmond Staten Island" regarding the removal of "about twenty bodies or human remains contained in that number of graves lying in the burial ground on the west-side of the Reformed Dutch Church at Richmond Staten Island."<sup>29</sup>

#### The Richmond Cemetery (Block 4442)

The Richmond Cemetery shown on a mid-19th century File Map for Block 4442 may have been mapped but was never realized. As defined on the 1854 "Map of Property Belonging to H. B. Cropsey & Associates, Richmond, Staten Island," the cemetery was meant to cover the central part of Block 4442 (see Figure 15), including a portion of the APE. Little is known about the impetus for the Richmond Cemetery's proposed creation or for the abandonment of these plans. As mentioned previously, included within its proposed boundaries was the 18th to 19th-century Rezeau-Van Pelt family cemetery (see Figure 15).

---

<sup>24</sup>Anon., 1853-1886

<sup>25</sup>Anon., 1853-1886; Anon., 1854 - 1880a; Anon., 1854 - 1880b

<sup>26</sup>See Appendix B, Table 1 for an alphabetical list of deaths from various church records (1853-1886), at least some of them undoubtedly buried in the church yard, and Appendix B, Table 2, for a chronological list that includes information from the reinterment record of the Moravian Cemetery in New Dorp..

<sup>27</sup>Geismar 1997; TAMS 1999

<sup>28</sup>Baughner et al. 1989:142-143

<sup>29</sup>Specifications and Estimate 1885

## FINDINGS

The tables and graphics mentioned in the Method section and cited here are presented in Appendix A Tables 1-4 and Figures A1 to A4. They were developed to coordinate the research findings regarding the archaeological sensitivity of those parts of five blocks and selected street beds in Historic Richmond Town, the project APE, that will be affected by the proposed undertaking. Grey contour lines found on the figures are from 1910/1911 topographical maps while black contour lines are from the 1986 Wohl and O'Mara survey. It should be noted that reproducing these lines may have caused some distortion. It should also be noted that Figures A1 to A4 locate all known structures in the study area to establish associations and context for those in the APE. For consistency, the letter designations used in the table and on the figures follow those found in Baugher et al. 1989. The reader is referred to that report to identify structures and features on the maps but not in the APE. Exceptions are the Rezeau-Van Pelt Cemetery, the 1769 Presbyterian and Reformed Dutch Church, the 19th-century Reformed Dutch Church at Richmond, and the Voorleezer's House, all of them outside the APE but described in Appendix A because of their associations with features and structures in the APE. A block-by-block written summary of the findings in the APE is provided below. A tabular summary of the construction dates by century of all known structures in the APE will be found in Appendix C.

### Block 4441 (Appendix A Table 1, Figure A1)

No. of structures/features documented in the APE: 35

No. of structures/features standing in the APE at this writing: 10

Changes in the APE topography 1910/11 to 1986: minimal

The historic Bennett House (A), built on the northeast corner of Richmond Road and Court Place in 1837, is an extant structure in the APE that will be altered during the proposed construction. Planned for the lower level facade on Court Place and for the adjacent grounds at street level, the alterations are to be made where previous disturbance has occurred. The ground alteration is mainly grading with fill. Also in the APE is the Stephens-Black House on the northeast corner of Court Place and Center Street (DD). This 1837 building has been altered over time. Other standing structures—the carpenter shop (E), the Eltingville Store (HH), the Transportation Museum (CC), and a storage shed (U)—were either built by Richmondtown Restoration or relocated to their various sites. One standing dwelling, the Schwiebert House (P), and the brick foundation with a frame extension from a Carriage Factory (R) are 20th-century structures. Several known privies (C, I, and K) were excavated in the 1960s; another (Q), associated with the extant Schwiebert House (P), and therefore dating to about 1910, has not been excavated. The former Reformed Dutch Church at Richmond (see C on Figure A4), built in 1808, was moved to this block in 1885 to become the now-defunct Carriage Repository (V). Other demolished structures (B-D, F-O, Q, T, V, W-Z, AA, BB, EE-GG, KK) either date from the 20th century or were not originally located on the block. However, unknown structures or features may be an issue.

### Block 4442 (Appendix A Table 2, Figure A2)

No. of structures/features documented in the APE: 5

No. of structures/features standing in the APE at this writing: 2

Changes in the APE topography 1910/11-1986: minimal

While there are only two standing structures in the APE--one, the 1837 Third County Courthouse located on Center Street (G), now a museum building, the other a gatehouse/watchman's shanty (E) on Tysen Court near Clarke Avenue built by Richmondtown Restoration in 1967--the historic Rezeau-Van Pelt family burial ground (F) is found here. This small burial ground will not be impacted by the proposed construction, but its original (18th-century) boundaries are unknown, a fact that should be considered during project planning. The current plans include construction of a service structure next to the cemetery. The three other former structures documented in the APE ( A-C) date from the 20th century.

Block 4443 (Appendix A Table 3a, Figure A3)

No. of structures/features documented in the APE: 15

No. of structures/features standing in the APE at this writing: 4

Changes in the APE topography 1910/11-1986: minimal

Four structures remain within the APE: the Edwards-Barton House (X), dating from about 1870, the County Clerk's Office (DD), built in 1848, now Historic Richmond Town's historical museum, the mid-19th century Crocheron Privy (GG) relocated from Woodrow Road in 1987, and a barn foundation (U) built in the 1970s. The Edward-Barton House apparently stands on the site of the earlier (1767) Swaim House (V). The First County Jail (A), built c.1710, is among the demolished structures as are Aquilino's store--a 20th-century pizza parlor and store (Y), a privy (AA) and a privy or cistern (BB)--both excavated in the 1960s--and a garage (CC) dating from 1917 or 1926. Other demolished 19th-century buildings include an unidentified structure (O) on Center Street, a succession of 19th-century outbuildings (EE)--possibly including a late-19th-century water closet--built c. 1878, Swain's "Waggon" House (HH) noted on an 1802 survey,<sup>30</sup> and an insurance office (FF) built in 1876. Also among the demolished structures is a 20th-century garage (Q).

The One-Acre Lot (Appendix A Table 3b, Figure A3)

No. of structures/features documented in the APE: 3

No. of structures/features standing in the APE at this writing: 0

Changes in the topography 1910/11-1986: none except road repairs or utility placement

Potential sensitivity in this area is considered high, although limited excavations in the 1970s did not uncover any evidence of archaeological features. All former structures at this location--a house/tavern (1), a small house (2), and a stable (3)--were of 18th century origin. The exact location of these structures is unknown.

P/O Block 4444N (Appendix A Table 3c, Figure A3)

No. of structures/features documented in the APE: 4 plus the Voorlezer's House

No. of structures/features standing in the APE at this writing: 0

Changes in the topography 1910/11-1986: undetermined

This strip of land was the former site of a late-17th-century blacksmith shop (B) and three

---

<sup>30</sup>Land Survey, 1802



19th-century structures: the Sarah Wood House (C), a shed (D), and a possible late-19th-century privy (H). The late-17th-century blacksmith shop (B) may have been associated with the Voorlezer's House (A), a standing structure beyond the APE but noted in Appendix A Table 3c because of its close association with the blacksmith shop and because of its historical significance. The possible privy is associated with the Voorlezer's House after it was converted into a hotel and tavern at the end of the 19th century and the beginning of the 20th. This feature has not been excavated.

Block 4463 (Appendix A Table 4, Figure A4)

No. of structures/features documented in the APE: 4

No. of structures/features standing in the APE at this writing: 0

Changes in the topography 1910/11-1986: minimal

The four known structures or features in the APE include part of a 20th-century outbuilding (L), a tenanted house built in 1869/1873 (K), and the Court House Hotel (S) built between 1855 and 1858. Perhaps most importantly, they also include the burial ground of the Reformed Dutch Church at Richmond (B). This cemetery is definitely associated with the 19th-century church (C), but a pre-Revolutionary war church on the same site, the 1769 Presbyterian and Reformed Dutch Church at Richmond (A), could also have been associated with this burial ground (although the church sites are outside the APE, A and C are included in Appendix A Table 4 because of their association with B). Based on the history of the associated churches, the burial ground may have been active for more than a century. While research has now indicated that the 19th-century cemetery was located on the west side of the church, it is possible that any burial ground associated with the earlier church could have been located elsewhere in the vicinity of the church edifice. Based on church records and the reinterment record at the Moravian Cemetery, it appears that burials, or the remnants of burials, could still remain within the APE along Center Street near Arthur Kill Road.

## SUMMARY AND RECOMMENDATIONS

In summary, four issues of potential or known sensitivity have been identified through the research presented here. One is the potential for the remains of historic structures in the bed of Center Street in the area known as the One-Acre Lot. Another is the potential for burials associated with churches once located on the south side of Center Street on the east side of Arthur Kill Road (Block 4463), some of them possibly dating to the 18th century. Yet another is the potential for unknown burials associated with the 18th-century Rezeau-Van Pelt Cemetery (Block 4463) that might extend beyond the cemetery as defined since the mid-19th century. And finally, but perhaps most importantly, are any unknown archaeological features that might be present in the APE and are to be expected at a long-occupied, historical village such as Historic Richmond Town.

It is recommended that an archaeologist be present to monitor any trenching within the APE on all four blocks east of Richmond Road (Blocks 4441, 4442, 4443, and 4463) and within the boundaries of the One-Acre Lot on Center Street. It is also recommended that pre-construction testing be carried out in the vicinity of the two burial grounds where impact will occur and on Block 4444N, west of Arthur Kill Road, where 18th and 19th-century foundations and associated features may be issues. Any features found in preconstruction testing, or during monitoring, should be documented through

drawings and photographs, and associated artifacts should be collected. Should significant features be found, efforts should be made to avoid and protect them as well as to document them. A report on the methods and findings of monitoring or any preconstruction investigations should be prepared to become part of the historic record of Historic Richmond Town.

## BIBLIOGRAPHY

Anon., 1854 - 1880a. Records of Members in Full Communion of the Reformed Dutch Church at Richmond, Staten Island. Ledger on file at the Archives of the Reformed Dutch Church in America. Gardner A. Sage Library, New Brunswick, New Jersey.

\_\_\_\_\_, 1854 - 1880b. Records of Baptisms. Reformed Dutch Church, Richmond, S. I. Ledger on file at the Archives of the Reformed Dutch Church in America. Gardner A. Sage Library, New Brunswick, New Jersey.

\_\_\_\_\_, 1853 - 1886. Minutes. Ref. D. Church, Richmond, Staten Island. Ledger on file at the Archives of the Reformed Dutch Church in America. Gardner A. Sage Library, New Brunswick, New Jersey.

Baugher, Sherene, Edward J. Lenik, Stephen Barto, Kate Morgen, Daniel N. Pagano, and Robert W. Venables, 1989. An Archaeological Planning Model of Richmontown Restoration, Staten Island, New York. Prepared for the New York City Landmarks Commission. March 1989.

Barto, Steven, N.D. Notes on the Rezeau-Van Pelt Family Cemetery. Staten Historical Society Library.

Beers, J. B. *Atlas of Staten Island, Richmond County*. J. B. Beers & Co., New York. Collection of the Library of Congress, Washington, D.C.

Cerami, Tina, 2000. Personal communication. Secretary, Moravian Cemetery, New Dorp, Staten Island.

Clark, Richard, 2000. Personal communication. Graduate student, Graduate Center, City University Of New York.

File Map, 1868. No. 386: Map of Property Adjoining the Village of Richmond, Late of Henry I. Seaman, Deceased. Filed by Jacob R. Cropsey September 28, 1868. Richmond County County Clerk's Office, St. George, Staten Island.

File Map, 1854: No. 353: Map of Property Belonging to H. B. Cropsey Esq. & Assoc's, Richmond, Staten. Island, J. J. Clute Surveyor. Richmond County County Clerk's Office, St. George, Staten Island.

Geismar, Joan H., 1999. Historic Richmond Town, Archaeological Field Testing - Letter Report. Prepared for the Staten Island Historical Society. Prepared by Joan H. Geismar, Ph.D. June 1999.

\_\_\_\_\_, 1997. Archaeological Evaluation (Stage 1A Documentary Study) Former Naval Station (NAVSTA) New York, Navy Yard Annex Site, Brooklyn, New York. Prepared for Northern Division by Joan H. Geismar, Ph.D. under contract to TAMS Consultants, Inc.

## BIBLIOGRAPHY (continued)

Land Survey, 1802. Survey of Property at Richmond, Staten Island, "For Debtors Imprisoned in the Jail of [Richmond County]." Depicts location of "Swaims [sic] Waggon [sic] house," September 18, 1802. Collection of William McMillen, Director of Restoration, Historic Richmond Town, Staten Island.

McMillen, William, 2000. Personal communication. Director of Restoration, Historic Richmond Town, Staten Island.

Odiseos, Phyllis, 1972a. Preliminary Report of Research done on the History of the Bennett House. On file, Staten Island Historical Society Library, Staten Island.

\_\_\_\_\_, 1972b Summary of information on Bennett House as Found in Attached Notes. On file, Staten Island Historical Society Library, Staten Island.

Ostrander, Father J. 1885. Superintendent, Moravian Cemetery, New Dorp. Specification and Estimate for Removal of Remains From Reformed Church Yard at Richmond. September 16, 1885.

Reinterment Record, 1885. Interment Record, Lot 6, Section D. Typescript. Moravian Cemetery, New Dorp, Staten Island.

Restoration Plan, 1992. Richmondtown Restoration. Comprehensive Site Restoration and Development Plan. Project Report. Volume I. Prepared for NYC Department of General Services, NYC Department of Cultural Affairs, Staten Island Historical Society. Prepared by Miceli Kulik Williams & Associates, Inc. Landscape Architects, with Mesick Cohen Walter Architects, Daniel R. Porter III Historic Site Administrator, Wealer-Cohen Associates, Inc. Mechanical Engineers. Contract No. PV341-D. July 10, 1992.

Richmond Town Restoration, N.D. *The Voorlezer's House: an Illustrated Guide*. Richmond Town Restoration Staten Island Historical Society.

TAMS, 1999. Pre-Final, State of the Research, Naval Hospital Cemetery, NAVSTA Brooklyn, Historical Documentation. Prepared for the US Department of the Navy Northern Division Naval Facilities Engineering Command. Prepared by TAMS Consultants and Joan H. Geismar. June 1999.

Topographic Maps of Richmond County, 1910/1911. Borough of Richmond Topographical Survey. On file, Richmond Borough Hall, Staten Island. Nos 54 and 61

Wohl and O'Mara, 1986. Topographic Survey of Richmondtown Restoration Area. Capital Project No. PV 341-Civil Engineers and Land Surveyors. 544 Vanderbilt Ave. Staten Island, N.J.



APPENDIX A Table 1. Block 4441 Known Structures and Features in the APE (Figure A1)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown


Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	22	<i>Bennett House</i>	<i>1837 - present</i>	<i>Private residence, then a store, post office &amp; restaurant(s) w/outbuilding; later Carpenter's Shop erected on lot ("E" below). Alterations planned</i>
B	22	Outbuilding (barn)	1878 - c 1911	1-story, replaced or expanded to 1½ stories 1884-1891; replaced by privy by 1911 ("C" below); btwn 1926 & 1935 an auto garage approx at same location ("D" below)
C	22	Privy	1911- 1926/35	On 1917 Topo map; replaced by garage ("D" below); excavated 1960s/1970s
D	22	Outbuilding (garage)	c 1926/35 - 1965	Built on site of "C" (above)
E	22	<i>Carpenter's Shop</i>	<i>1966 - present</i>	<i>Constructed by RTR</i>
F	25&26	Ambrose G. Taylor House (3722 - formally 722 - Richmond Rd - front)	c 1845 - c 1952	Taylor a blacksmith & tinker; residence (fronting on street)
G	26	Ambrose G. Taylor House (3722 - formally 722 - Richmond Rd - rear)	1862/67 - c 1898 - 1907	Residence; rental property
H	26	Ambrose G. Taylor, Shop	c 1848 - c 1914	Blacksmith & tinker shop; shop section demolished by 1954
I	25	Privy	c 1911 - c 1950	Ambrose G. Taylor/Alvin Ellis property; exact construction date unknown; replaced by chicken coop (not shown on map), then a shed ("J" below); excavated 1960s/1970s
J	25	Outbuilding (shed)	c 1963 -c 1969	Removed by RTR
K	26	Privy/Shed	c 1911 - c 1960/70s	6 ft square excavated 1960/70s
L-O	30	Outbuildings (4)	c 1878 - 1898/1911	Associated w/Carriage Factory ("P", "Q" below & "S" on Figure A1)
P	30	<i>Schwiebert House</i>	<i>1910 - present</i>	<i>John F Schwiebert's residence; in Schwiebert Family until 1944; extensive alterations</i>
Q	30	Privy	c 1911 - c 1960/70s	Poss privy on Schwiebert's S lot line ("P" above)
R	32	<i>The Carriage Factory (brick foundation w/ frame extension in rear)</i>	<i>1854-1945 present</i>	<i>Brick &amp; wood frame factory buildings; John F. Schwiebert in 1901; converted to auto body repair shop by 1933; wood building demolished 1938, brick building 1945; partially reconstructed 1971</i>

APPENDIX A Table 1. Block 4441 Known Structures and Features in the APE (Figure A1)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
T	4	Guyon Tinsmith Shop	c 1870- c 1881	First documented on 1873 Tax Assessment
U	32	<i>Storage Shed</i>	<i>1967 - present</i>	<i>Constructed by RTR</i>
V	12	Original 1808 Reformed Dutch Church/ Carriage Repository	c 1885/87 - 1903	Reformed Dutch Church relocated c 1885/87 from Block 4463; used as carriage repository until 1903
W <sup>1</sup>	12	Outbuilding	c 1878 - 1885/87	1-story outbuilding; another outbuilding later on same site ("X" below)
X	12	Outbuilding	c 1911 - c 1927	Appears to be on same site as "W" (above)
Y	9	House, 279 Center St	c 1922 - 1956	Klussman residence until RTR in 1963; human bones purportedly found during house construction
Z	12	House, 283 Center St	c 1922 - 1965/66	Baumann residence; successive owners documented
AA	12	Garage	1953? - 1965	Frame garage; demolished/removed
BB	9	Garage	1953? - 1956	Frame garage; demolished/removed
CC	9 & 12	<i>Transportation Museum</i>	<i>1967/68 - present</i>	<i>Constructed by RTR</i>
DD	15	<i>Stephens -Black House &amp; Store</i>	<i>1837 - present</i>	<i>Stephen D. Stephens builder/occupant 1837; sold to Mary Black &amp; two daughters 1840; altered over time &amp; reconstructed by 1964</i>
EE	15	Outbuilding (barn)	c 1878 - 1935	P/o former Stephens residential complex; later additions included storage wing & another barn ("FF" below)
FF	15	Outbuilding (barn)	c 1878 - 1935	P/o Stephens - Black complex ("EE" above)
GG	15	Outbuilding (privy?)	c 1911 - 1960/70s	Rear of Lot 15; Stephens -Black property
HH	15	<i>Eltingville Store</i>	<i>c 1961 - present</i>	<i>Relocated to Richmondtown</i>
II	15	<i>Colon Store</i>	<i>1969 - present</i>	<i>Relocated to Richmondtown</i>
JJ	15	<i>Privy</i>	<i>1968 - present</i>	<i>Relocated to Richmondtown from Journey House, Richmond Valley in 1968; built c 1860</i>
KK	15	Mersereau Carpenter Shop	c 1841 - c 1849	Exact location unknown

HISTORIC RICHMOND TOWN Block 4441, Court Place, and Part of Center Street

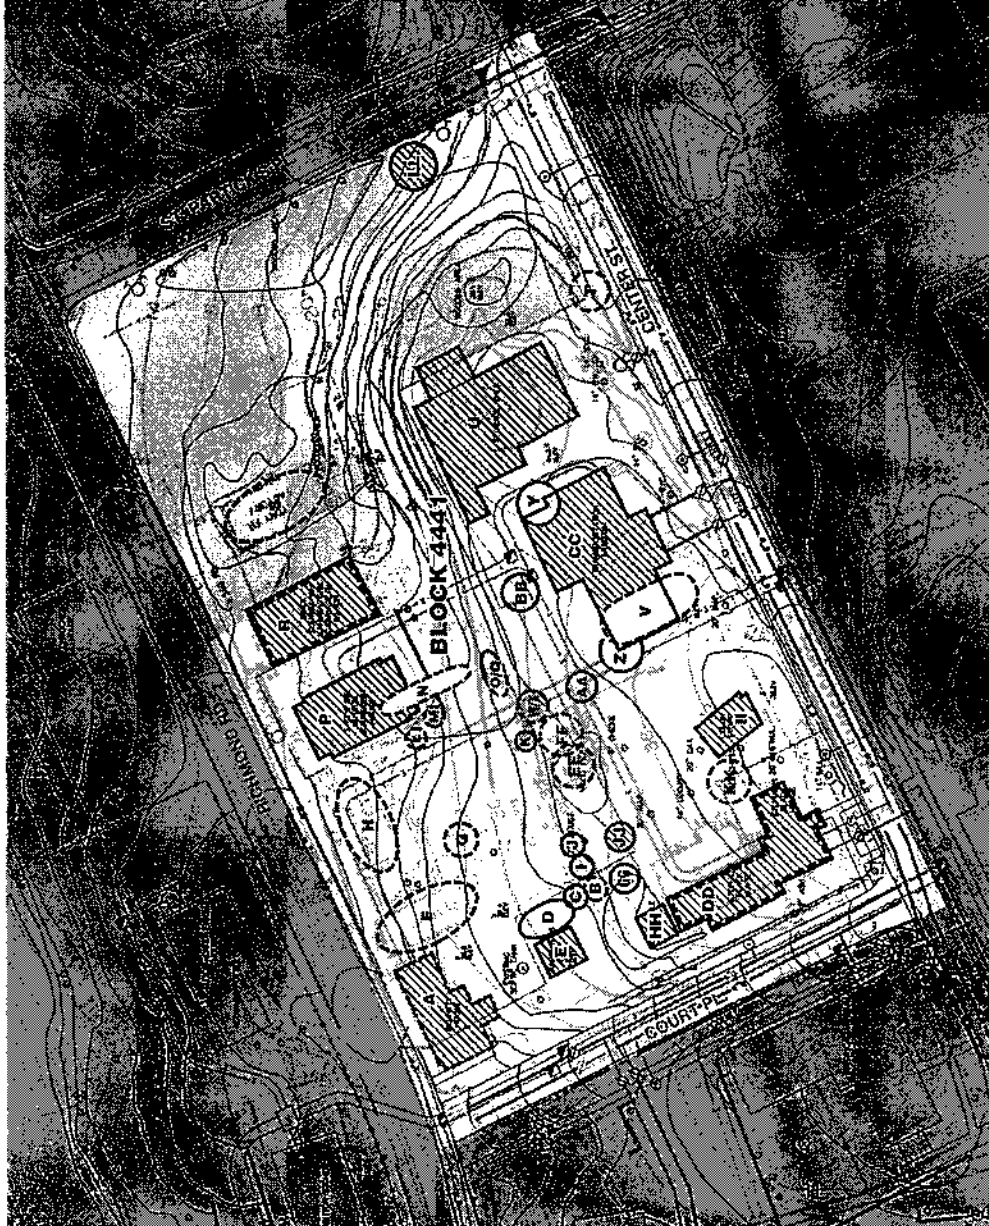

- Existing and Proposed Infrastructure within the Project Area
- G — proposed new gas line
  - H — proposed new water line
  - E — proposed new sanitary line
  - F — proposed new storm water line
  - X — proposed new electric line
  - Y — proposed new telephone line
  - X — existing/not in contact utility line
  - Y — contact limit line

- 19th century structure
- 20th century structure
- contact APE
- block beyond current contract
- project area beyond Block 4441
- standing structure

Based on 1910/11 Richmond County topo map, Wohl & O'Mara 1988, and Baugher et al. 1988. Grey contour lines are 1910/11, black contour lines are 1988. See Baugher et al. 1988 for description of structures/structures beyond the APE.




APPENDIX A Table 2. Block 4442 Known Structures and Features in the APE (Figure A2)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	24	Carriage Shed/Garage	1902?/07 - 1965	By 1907 but poss earlier; p/o Court House Hotel complex ("B", "C", below, & "D" Figure A2); poss built by Julius Dobler owner in 1902
B	24	Shed/Garage	1907 - 1965	By 1907 but poss earlier; p/o Court House Hotel complex ("A" above, "C" below & "D" Figure A2) poss built by Julius Dobler owner in 1902
C	24	Barn/Garage (2-story)	1902?/07 - c 1935	By 1907 but poss earlier; p/o Court House Hotel complex ("A" & "B" above & "D" Figure A2) poss built by Julius Dobler owner in 1902
E	24	<i>Gatehouse/Watchman's Shanty (RR gatehouse)</i>	<i>1965 - present</i>	<i>Relocated to Richmondtown; associated w/New Dorp RR Station</i>
F	31	<i>Rezeau-Van Pelt Cemetery</i>	<i>18<sup>th</sup> C - present</i>	<i>Enclosed by modern wood fence w/remnant of mid-19th C iron fencing extant; in use until at least the 1860s</i>
G	11	<i>Third County Court House</i>	<i>1837 - present</i>	<i>2½ stories; Court House &amp; Center St openings coincide; included jail facility until 1860 (see "H" Figure A2); it has been noted that the Court House site is the highest elevation in the village.</i>

HISTORIC RICHMOND TOWN Block 4442, Tysen Court, Part of Center Street, and Part of Clarke Avenue

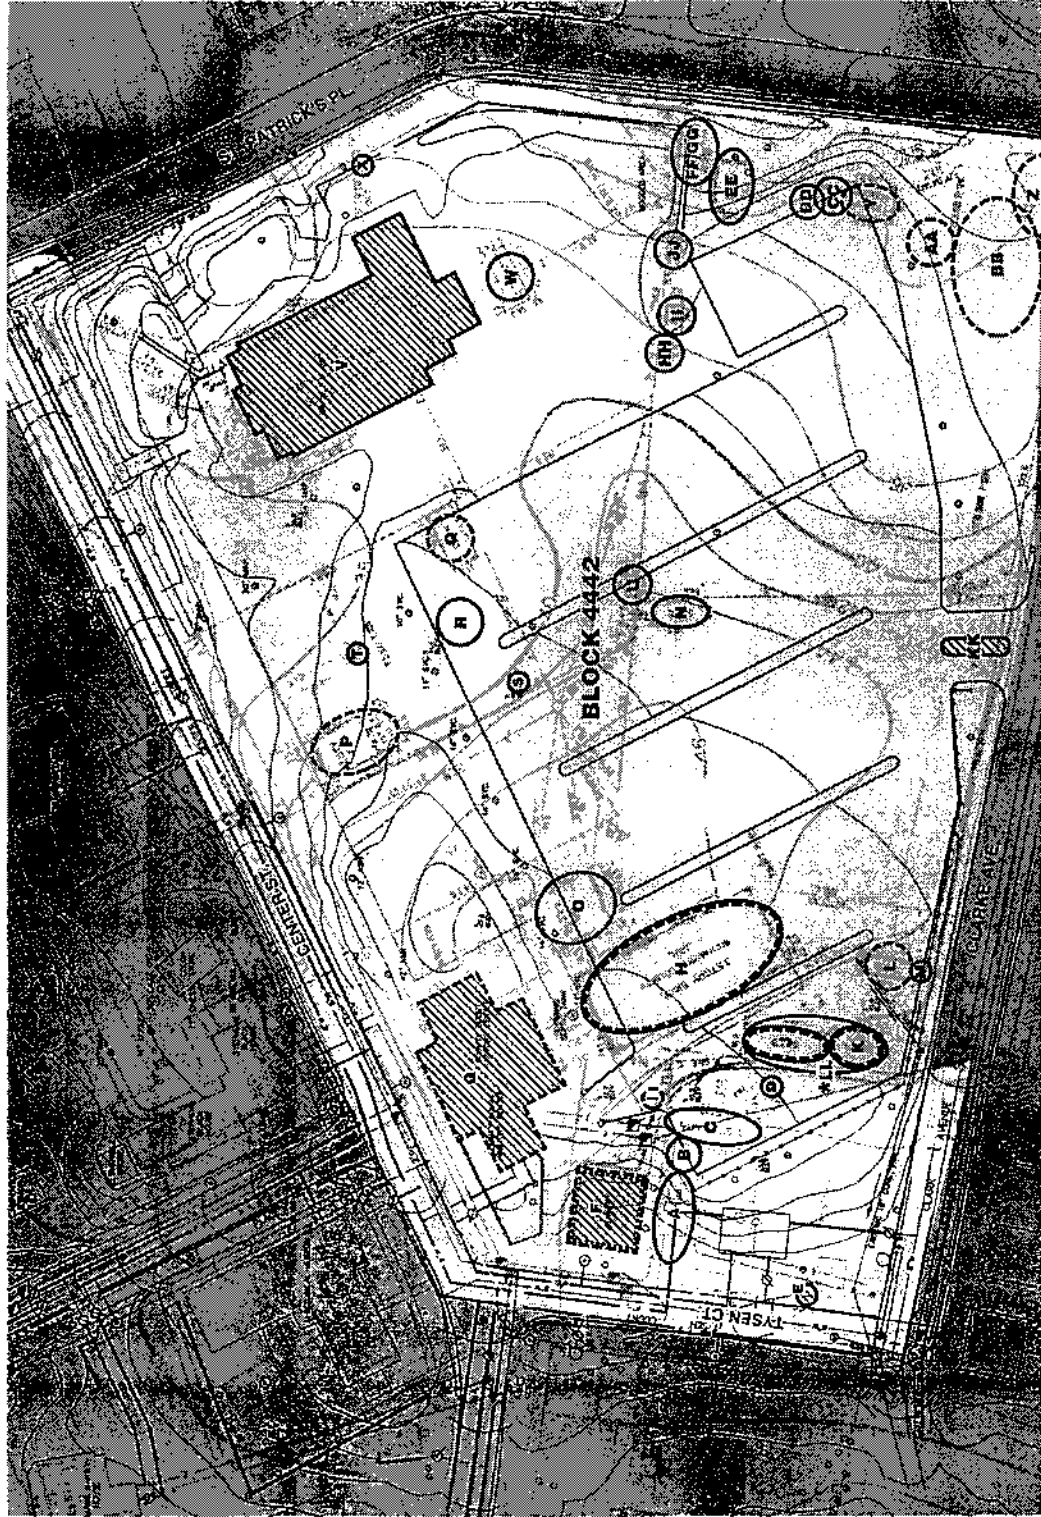

- Existing and Proposed Infrastructure within the Project Area
- G — proposed new gas line
  - W — proposed new water line
  - S — proposed new sanitary line
  - E — proposed new storm water line
  - F — proposed new electric line
  - T — proposed new telephone line
  - X — existing/old in contract utility line
  - — contract land line

- ..... 18th century structure
- 19th century structure
- 20th century structure
- contract APE
- block beyond current contract
- project area beyond Block 4442
- ▨ existing structure
- \* possible location of LL



Based on 101011 Richmond County 1990 maps Wolf & O'Neil 1985, and Baugher et al. 1989. Grey contour lines are 1910/11 block contour lines. See 1985. See Baugher et al. 1989 for description of structures/features beyond the APE.

APPENDIX A Table 3a. Block 4443 Known Structures and Features in the APE (Figure A3)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	15	First County Jail	c1710 - c 1741	First structure on lot; poss in private use after 1741; may have been converted into inn by Dr Thomas Frost (McMillen in Baugher et al. 1989)
O	11	Building (use unknown)	c 1874? - c 1891/98	Unid; faced Center St
Q	11	Garage	c 1911/17 - 1932	Poss built by McCall & Turner owners 1913-1918
U	11	<i>Barn Foundation</i>	<i>1972 - present</i>	<i>Constructed by RTR</i>
V	8	Swaim House	c 1767 - early 19 <sup>th</sup> C	Also poss location of Prall House c 1723 (see "C" & "W" Figure A2 for other possible locations); poss used by Marthais Swaim Sr as residence to 1767; poss demolished after Swaim's death in 1781, but gone by 1830; after Swaim House demolished became site of Edwards-Barton House ("X" below)
X	8	<i>Edwards - Barton House</i>	<i>c 1870 - present</i>	<i>Built by Webley J./Deborah M. Edwards; by 1898 owner Ella Barton, their daughter; remains in family until 1921</i>
Y	8	Aquilino's Store & Restaurant	c 1926 - 1966	Former John S. Edwards' property
AA	8	Privy	c 1911 - c 1960/70s	Edwards family privy? 5 x 6 ft; 40 ft beyond SW (rear) corner of Edwards - Barton House; excavated 1960s/70s
BB-	8	Privy/Cistern?	c 1911 - c 1960/70s	2 x 3 ft; c 12 ft beyond SW (rear) corner of Edwards - Barton House; use not fully determined; excavated 1960s/70s
CC	8	Garage	c 1917/26 - c 1981	Nr W lot boundary
DD	1	<i>County Clerks Office (Historical Museum)</i>	<i>1848 - present</i>	<i>Altered 1933-38; became Historical Museum; site may include cistern (rear) built by 1885.</i>
EE	1	Outbuilding	c 1878 - c 1908 c 1911 - c 1926/35	Succession of buildings; one poss a water closet first appears on 1878 Sanborn; prob removed btwn 1898 & 1907
FF	6	Insurance Office	1876 - c 1926	Built by Henry B. Metcalfe for Richmond County Mutual Insurance Company; New York Title Company occupied building 1916 - 1917
GG	8	<i>Privy</i>	<i>1865? - present</i>	<i>Crocheron House privy dismantled &amp; removed from Woodrow Rd in 1987; reconstruction at Richmondtown post dates Baugher et al. 1989</i>
HH	8	Swaim's "Waggon" House	c 1802 - ?	Noted on 1802 survey; poss extended to or located w/in bed of Court Pl; location on Figure A3 approx

APPENDIX A Table 3b. The One -Acre Lot:\*\* Known Structures and Features in the APE (Figure A3)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
1	One - Acre Lot	House/Tavern - Center St btwn Arthur Kill Rd & Tysen Ct	c 1705/55? - 1836/37?	1705 based on ambiguous evidence, in 1765 Richard Cole advertised 2 houses & a stable for sale, Dr Thomas Frost owner in 1769; Moses Doty, 1781; Frost stays on as tavern keeper until 1785/86 "Cuckoldstown Inn?"; Daniel Turner innkeeper 1793-1798, but property in Doty family until 1798; bought by Isaac Swaim in 1798, continues operating inn, dies 1803; his widow hires John Dubois, her future husband, to run inn; they buy property in 1806; the widow Dubois sells to Henry Seaman in 1836; Center St run 1837; all standing structures demolished at that time
2	One - Acre Lot	House (small) - Center St btwn Arthur Kill Rd & Tysen Ct	c1755 - 1765?	Only mention 1765 advertisement ("1" above); Center St run 1837; all standing structures demolished at that time
3	One - Acre Lot	Stable - Center St btwn Arthur Kill Rd & Tysen Ct	c 1755 - 1815/36/37	Noted in 1765 advertisement ("1" above) & in 1815; Center St run 1837; all standing structures demolished at that time


APPENDIX A Table 3c. Block 4444N Known Structures and Features in the APE (Figure A3)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A'	24	<i>Voorlezer's House</i>	<i>c1696 - present</i>	<i>Built as the home of the Dutch Congregation's "Voorlezer" (lay minister) and possibly his school from c 1696 - 1700<sup>s</sup>; in 1701 was briefly occupied by Louis Dubois, owner of tavern in what is now Center St (Table 3b); acquired by Rezeau family in 1805; in their possession for 167 years; sometime in late 19<sup>th</sup> C or early 20<sup>th</sup> C it was enlarged to become a hotel/tavern; restored &amp; donated to SIHS in 1938; moved c 15 ft W of original site btwn 1939 &amp; 1942</i>
B	24	Blacksmith's Shop	c 1696 - c 1800?	Site of blacksmith shop of William Fitchett & Louis DuBois; poss associated w/ the neighboring Voorlezer's House ("A" above), may have been occupied by four DuBois generations until 1800; poss p/o One-Acre Lot; poss p/o 19 <sup>th</sup> C Sarah Wood House "C" below
C	24	Sarah Wood House	c 1800/1804 - 1872	Buildings occupied site from the 17 <sup>th</sup> to 19 <sup>th</sup> C; second house poss a residence, bakery, and workshop; home of Sarah Wood 1852 - 1864; occupied as residence until 1872 when it burned.
D	24	Shed	1878 - 1891	1 - story outbuilding
H	24	Privy?	C 1898 - ?	Poss a privy associated w/ the Voorlezer's House when it was a hotel & tavern

HISTORIC RICHMOND TOWN Block 4443, The One-Acre Lot, Block 4444N, Part of Richmond Road, Part of Center Street

- Existing and proposed infrastructure within the Project Area
- G proposed new gas line
  - W proposed new water line
  - proposed new sanitary line
  - proposed new storm water line
  - E proposed new electric line
  - T proposed new telephone line
  - X existing/not in contract utility line
  - contract limit line

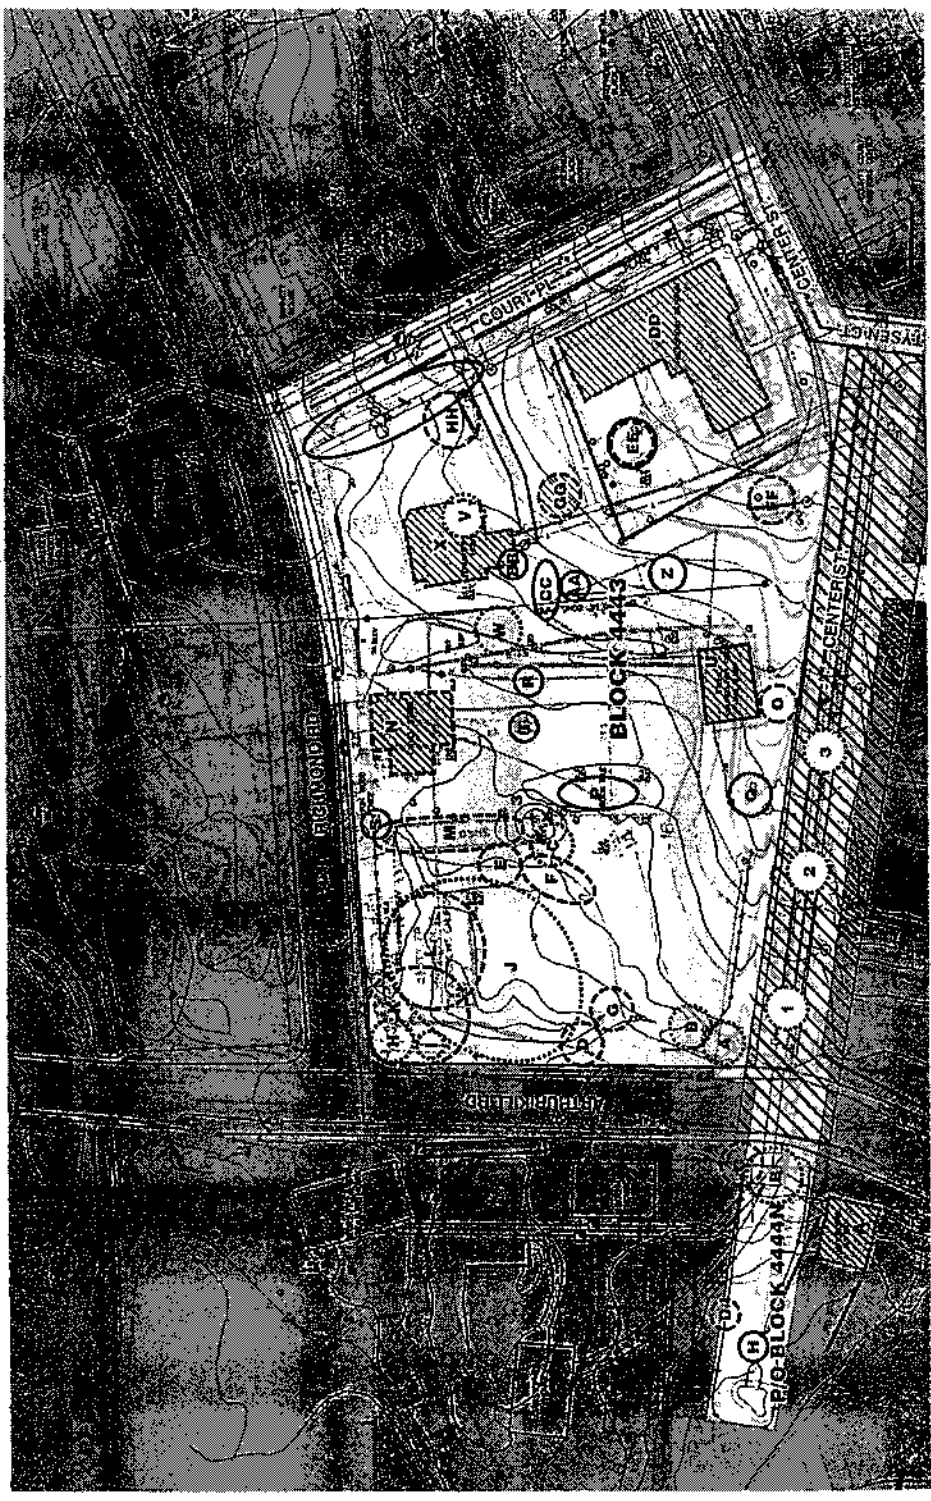

- ..... 18th century structure
- 19th century structure
- 20th century structure
- contract APE
- block beyond current contract
- project area beyond Block 4443 and part of 4444N and APE
- One-Acre Lot (part of)
- standing structure

Based on 1910/11 Richmond County topographic maps, Wood & O'Hara 1986, and Daughler et al. 1989. Grey contour lines are 1910/11. Black contour lines are 1986. See Daughler et al. 1989 for description of structures/features beyond the APE.

APPENDIX A Table 4. Block 4463 Known Structures and Features in the APE (Figure A4)

Existing Structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C structures are screened as shown

Map ID*	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A <sup>2</sup>	13	<b>Presbyterian &amp; Dutch Reformed Church</b>	1769 - c 1776	Poss relocation of the Stony Brook Presbyterian Church building to Richmond when it joined w/the Dutch Reformed Church in 1769; destroyed during Revolutionary War; the Reformed Dutch Church rebuilt on same site in 1808 as (see "C" below)
B	13	<b>Church Burial Ground</b>	18 <sup>th</sup> & 19 <sup>th</sup> C	Burial ground of Reformed Dutch Church; extant through 1885; on W side of 19 <sup>th</sup> C structure (new information), but exact location, size, & number of burials unknown; between 9/26/1885 & 12/7/1885 - 21 burials were disinterred & removed to the Moravian Cemetery (see text for details)
C <sup>1</sup>	13	<b>Reformed Dutch Church (later Reformed Dutch Church of Richmond)</b>	1808 - 1885 <sup>3</sup>	Rebuilt on site of "A" above in 1808; structure removed to Block 4441 Lot 12 in 1885/87 ("V" Table 1); limited excavation summer of 2000 did not reveal any evidence of structure (Clark 2000:pc)
K <sup>3</sup>	5	<b>House, 328 Center St</b>	c 1869/73 - 1965	Rental property owned by the Putnams; poss occupied by Peter Nolan or William Richardson 1870-1873
L	5	<b>Outbuilding (vault)</b>	c 1910 - 1965	Originally an office vault behind 328 Center St
S <sup>4</sup>	4 & 1	<b>Court House Hotel</b>	1855/58 - 1942/43	Joseph Lytle prob owner/builder; sells to Jeremiah Vail 1864; George Sharpe owner 1867-1898; poss a hotel until 1920 w/various hotel keepers including E. Jaedwer, H. Baruth and W. Killmeyer [Killmeyer]; a bar in 1930

\* Designations are those used in Baugher et al. 1989

<sup>1</sup> Beyond project APE; included because of its association with structures/features in the APE

\*\* The One-Acre Lot (1699) in the bed of modern Center St; bounded W by Arthur Kill Rd; East by Tysen Ct; includes east side of Block 4442 (Lots 11 & 42); west side of Block 4444 (Lot 24)

Footnotes:

<sup>1</sup> "V" in Baugher et al. 1989:323

<sup>2</sup> Church records indicate the congregation of the Reformed Dutch Church at Richmond dissolved in 1875


<sup>3</sup> "J" & "K" are misidentified in Baugher et al. 1989, corrected here

<sup>4</sup> The 1887 Beers map in the collection of the Library of Congress fails to indicate this structure, poss a map-maker's error

Abbreviations:

approx = approximately; btwn = between; ident = identified; nr = near; poss = possibly, possible; prob = probably, probable; p/o = part of; RTR = Richmond Town Restoration; SIHS = Staten Island Historical Society; topo = topographical; unid = unidentified; w/ = with

HISTORIC RICHMOND TOWN Block 4463, Tysen Court, and Part of Center Street

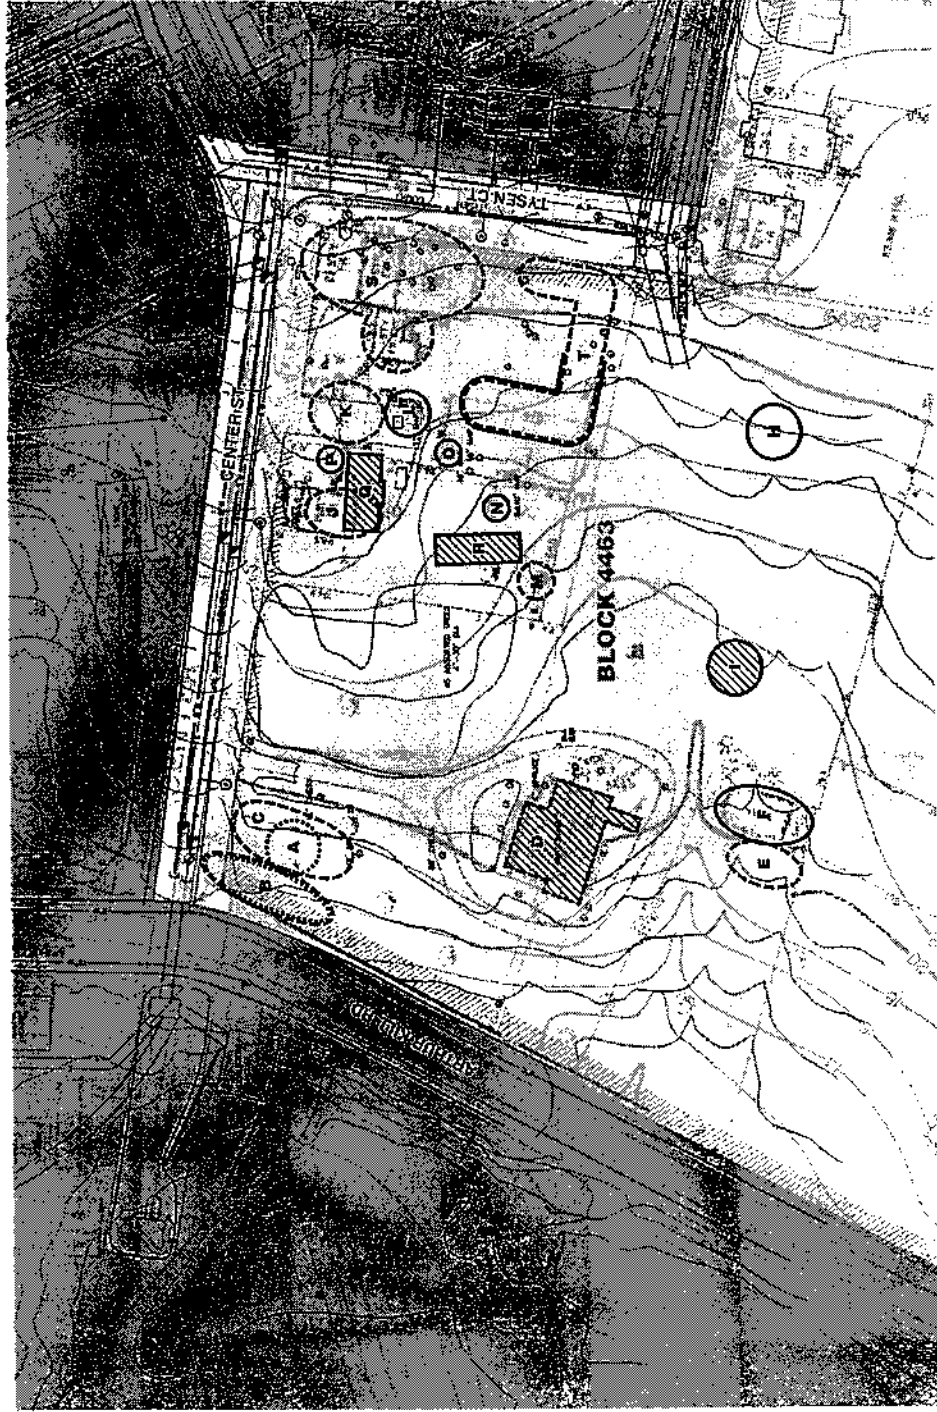

Existing and Proposed Infrastructure within the Project Area

- C— proposed new gas line
- W— proposed new water line
- S— proposed new sanitary line
- E— proposed new steam water line
- T— proposed new electric line
- X— proposed new telephone line
- X— existing/old in contract utility line
- contract trail line

- 18th century structure
- 19th century structure
- 20th century structure
- contract APE
- block beyond current contract
- project area beyond Block 4463
- standing structure

Based on: 1810/11 Richmond County topo maps, Work & O'Mara 1996, and Baughner et al. 1969.  
 Grey contour lines are 1910/11, black contour lines are 1969.  
 See Baughner et al. 1969 for description of structures/features beyond the APE.

Note: See Figure A3 for information about the One Acre Lot (western part of Center Street)



**HISTORIC RICHMOND TOWN APPENDIX** Deaths/Burials/Funerals from Records of the  
Reformed Dutch Church, Richmond, Staten  
Island 1854-1875 and the Moravian  
Cemetery, New Dorp 1885

**B**

APPENDIX B Table 1. Alphabetical Listing of Recorded Richmond Church Deaths 1854-1875

Date of Deaths/ Burials/Funerals	Name	Comments
12/12/1858	Abeel, Harriet	Preached funeral sermon on this day
8/1/1858	Baker, Mr.	Of New York; preached funeral sermon on this
1/31/1858	Barton, Col.	--
5/21/1864	Bedell, Mrs.	Wife of Silas Bedell
2/28/1861	Bedell, William	Son of Mrs. Susan Ann Bedell
8/24/1859	Brown, David	Son of David Brown of Princess Bay
7/26/1859	Brown, Mary Dod	--
4/25/1858	Brownlee, Wife of Rev. James	Preached funeral sermon (on Wed); Brownlee of DRC of Port Richmond
8/1/1858	Clark, Frederick	--
10/29/1859	Cole, Mrs C. A.	Sister of Cornelius Cole of South Side
1/11/1864	Cole, Cornelia	Daughter of Mrs. Cornelius Cole
No Date	Cole, Sarah	Wife of Cornelius Cole
7/1/1861	Crocheron, Mary	Widow
No Date	Cropsey, Elizabeth	Wife of Jacob Cropsey
12/15/1859	Davie, Marion Smith	11 years old, born 7/2/1848; W.B. and Sarah Davie parents
8/7/1858	Egbert, Mr. Barnett, the Elder	Funeral sermon 10/31/1858; member of the church; "died w/in last two months"
2/26/1870	Infant, Egbert, Susan	Daughter of Mr. W. H. Geib; died of a brief illness
8/25/1861	Ford, Thomas	--
8/2/1857	Garrison, Peter	(Colored) died Wed last buried Fri; 14 years old
5/7/1877	Garretson, Ann	--
4/2/1866	Garretson, Annie	--
No Date	Geib, W. H.	--
12/12/1858	Guinnegaed(?), Catherine	Aged 9 weeks
5/7/1868	Ketchem, Phillip	--
12/30/1860	Ketchem, Sarah	Wife of Phillip Ketchem
4/11/1858	Lake, Mrs Cornelia	Of Springville; preached funeral sermon last Thurs
10/7/1857	Infant	Child of James Lake; Freshkill
12/7/1863	Louden, Catherine	Widow

APPENDIX B Table 1. Alphabetical Listing of Recorded Richmond Church Deaths 1854-1875

Date of Deaths/ Burials/Funerals	Name	Comments
4/7/1856	M'Lean, Catherine	--
5/13/1858	Mersereau, Joshua	Of South Side; buried this week
8/9/1857	Mersereau, Stephen	Aged 4 ½ years
1/7/1855	Musier, Catherine	--
*12/?/1867	Osborn, Eleanor	See 12/22/1864 Eleanor Osborn below
*12/22/1864	Osborn, Miss Eleanor	Who died Thursday night
12/12/1857	Parssels, Mrs. Catherine	Of Richmond; sister of Joseph Lytel
11/7/1857	Perine, John	Of South Side
5/23/1864	Randolph, Catherine Louise	Daughter of James F. and Emma Randolph
4/3/1864	Randolph, Peter G.	Son of John and Annie Randolph
5/15/1857	Seguine, Mary Catherine	Daughter of Joseph C.V. Seguine; was dying when baptized
6/1/1857	Scott, Andrew	--
2/24/1865	Simonson, John William	Son of John W. and Charlotte A. Simonson; born 7/14/1860
7/?/1879	Stephens, Ann Eliza	--
10/11/1864	Stephens, Child	7 months old; child of James W. and Emily Stephens
No Date	Stephens, Daniel	--
4/13/1862	Stephens, Mrs. Mary	Widow of John Stephens
7/?/1868	Tysen, Emily	Mrs. J.W. Stephens
7/28/1854	Tysen, Infant, Sarah Ann	Child of David and Eliza Lake Tysen; Funeral sermon held Sunday 7/30/1854
2/2/1866	Tysen, Richard	--
9/17/1854 (Sunday)	Unknown	A large funeral
7/?/1855	Wendling, Anna	--
No Date	Williams, Catherine Williams	--
8/16/1857	Williams, Mrs.	Mother of Benjamin; this past week; aged 87
9/?/1858	Williams, William T. Williams	Funeral sermon 10/31/1858; member of the church; "died w/in last two months"
3/10/1865	Winnant, Fanny	Widow

\*Possible repeat: Miss Eleanor Osborn (died 12/22/1864?) and Eleanor Osborn (died 12/?/1867?) may be same individual. One death is listed in the minutes (Anon. 1853 - 1886), the other in the Record of Members in Full Communion (Anon. 1854 - 1880a)

APPENDIX B Table 2. Chronological Listing of All Recorded Deaths/Burials/Funerals 1817-1879  
(burials removed to the Moravian Cemetery 1885 are bold & italicized)

Date of Deaths/ Burials/Funerals	Name	Removal Date
<i>4/18/1817</i>	<i>Jasper Cropsey</i>	<i>Removed 12/4/1885</i>
<i>7/28/1824</i>	<i>Henry Miller</i>	<i>Removed 11/28/1885</i>
<i>9/15/1825</i>	<i>Jane Durham</i>	<i>Removed 11/28/1885</i>
<i>9/17/1825</i>	<i>Andrew Durham</i>	<i>Removed 11/28/1885</i>
<i>9/23/1825</i>	<i>Ricky Durham</i>	<i>Removed 11/28/1885</i>
<i>10/26/1826</i>	<i>Elizabeth Cropsy</i>	<i>Removed 12/4/1885</i>
<i>7/23/1827</i>	<i>Cornelius C. Cropsey</i>	<i>Removed 12/4/1885</i>
<i>8/23/1827</i>	<i>Sarah Crane Pierson</i>	<i>Removed 11/28/1885</i>
<i>10/12/1830</i>	<i>Harman Cropsy</i>	<i>Removed 12/4/1885</i>
<i>7/26/1835</i>	<i>Smith W. DeHart</i>	<i>Removed 11/28/1885</i>
<i>6/5/1850</i>	<i>Susan Marshall</i>	<i>Removed 11/30/1885</i>
<i>1/12/1852</i>	<i>Elizabeth Miller</i>	<i>Removed 11/28/1885</i>
7/28/1854	Infant, Sarah Ann Tysen	--
9/17/1854 (Sunday)	Unknown	--
1/7/1855	Catherine Musier	--
7/7/1855	Anna Wendling	--
4/7/1856	Catherine M'Lean	--
5/15/1857	Mary Catherine Seguire	--
6/1/1857	Andrew Scott	--
8/2/1857	Peter Garrison	--
8/9/1857	Stephen Mersereau	--
8/16/1857	Mrs. Williams	--
10/7/1857	Infant	--
11/7/1857	John Perine	--
12/12/1857	Mrs. Catherine Parsells	--
1/31/1858	Col. Barton	--
4/11/1858	Mrs Cornelia Lake	--
4/25/1858	Wife of Rev. James Brownlee	--
5/13/1858	Joshua Mersereau	--
8/1/1858	Frederick Clark	--

APPENDIX B Table 2. Chronological Listing of All Recorded Deaths/Burials/Funerals 1817-1879  
(burials removed to the Moravian Cemetery 1885 are bold & italicized)

Date of Deaths/ Burials/Funerals	Name	Removal Date
8/1/1858	Mr. Baker	--
8/7/1858	Mr. Barnett Egbert, Elder	--
9/7/1858	William T. Williams	--
<b><i>2/12/1859</i></b>	<b><i>Harman B. Cropsey</i></b>	<b><i>Removed 12/7/1885</i></b>
12/12/1858	Catherine Guinneaed(?)	-
12/12/1858	Harriet Abeel	-
7/26/1859	Mary Dod Brown	--
8/24/1859	David Brown	--
10/29/1859	Mrs C. A. Cole	--
12/15/1859	Marion Smith Davie	--
12/30/1860	Sarah Ketchem	-
2/28/1861	William Bedell	-
7/1/1861	Mary Crocheron	--
8/25/1861	Thomas Ford	--
4/13/1862	Mrs. Mary Stephens	--
12/7/1863	Catherine Louden	-
1/11/1864	Cornelia Cole	--
4/3/1864	Peter G. Randolph	--
5/21/1864	Mrs. Bedell	-
5/23/1864	Catherine Louise Randolph	--
10/11/1864	Child	--
12/22/1864*	Miss Eleanor Osborn	-
2/24/1865	John William Simonson	-
3/10/1865	Fanny Winant	-
4/2/1866	Annie Garretson	-
2/2/1866	Richard Tysen	--
12/7/1867*	Eleanor Osborn	-
5/7/1868	Phillip Ketchem	-

APPENDIX B Table 2. Chronological Listing of Recorded Deaths/Burials/Funerals 1817-1879  
(burials removed to the Moravian Cemetery 1885 are bold & italicized)

Date of Deaths/ Burials/Funerals	Name	Removal Date
<i>6/17/1868</i>	<i>John Marshall</i>	<i>Removed 11/30/1885</i>
<i>?/?/1868</i>	Emily Tysen	--
<i>2/26/1870</i>	Infant; Susan Egbert	--
<i>5/?/1877</i>	Ann Garretson	--
<i>?/?/1879</i>	Ann Eliza Stephens	--
No Date	Sarah Cole	--
No Date	Daniel Stephens	--
No Date	Catherine Williams	--
No Date	Elizabeth Cropsey	--
No Date	W. H. Geib	--
<i>No Date</i>	<i>Unknown</i>	<i>Removed 11/30/1885</i>
<i>No Date</i>	<i>Unknown Child</i>	<i>Removed 12/3/1885</i>
<i>No Date</i>	<i>Unknown Child</i>	<i>Removed 12/3/1885</i>
<i>No Date</i>	<i>Unknown Child</i>	<i>Removed 12/3/1885</i>
<i>No Date</i>	<i>Unknown Child</i>	<i>Removed 12/3/1885</i>
<i>No Date</i>	<i>Unknown Adult</i>	<i>Removed 12/7/1885</i>
<i>No Date</i>	<i>Unknown Adult</i>	<i>Removed 12/7/1885</i>

\*\*Possible repeat: Miss Eleanor Osborn (died 12/22/1864?) and Eleanor Osborn (died 12/?/1867?) may be same individual. One death is listed in the minutes (Anon. 1853 - 1886), the other in the Record of Members in Full Communion (Anon. 1854 - 1880a)

Known burials possibly in the Reformed Dutch Church, Richmond, Cemetery = 75 individuals, but with caveats:  
1817-1854 = 13 named and dated, 1 dated but unnamed; 1855 through 1879 = 49 named and dated;  
unknown dates = 5; unknown name and date = 7. It should be noted that unnamed burials from the  
Moravian Cemetery records could be among those named in the records of the Reformed Dutch Church,  
Richmond. Given this caveat, a minimum of 68 deaths/burials/funerals are documented in these records.



APPENDIX C Table 1. Structures and Features in APE

Block No.	18 <sup>th</sup> Century	19 <sup>th</sup> Century	20 <sup>th</sup> Century	Totals
Block 4441	--	16	19	35
Block 4442	--	1	4	5
Block 4443	2	7	6	15
Block 4444N	1	3	--	4
One-Acre Lot	3	--	--	3
Block 4463	1	2	1	4
Totals	7	29	30	66

APPENDIX C Table 2. Extant Structures and Features in APE

Block No.	18 <sup>th</sup> Century	19 <sup>th</sup> Century	20 <sup>th</sup> Century	Totals
Block 4441	--	3	7	10
Block 4442	--	1	1	2
Block 4443	--	3	1	4
Block 4444N	--	--	--	--
One-Acre Lot	--	--	--	--
Block 4463	--	--	--	--
Totals	--	7	9	16



**THIS PAGE INTENTIONALLY LEFT BLANK**

---

Memo Report  
Archaeological Assessment of Museum Utility  
Upgrades, Historic Richmond Town  
(Center Street, Tysen Court and Court Place)  
Borough: Staten Island

---

Capis ID: PVC 341-M



---

Prepared for the New York City Department of Design and Construction (NYCDDC)  
Prepared through Stantec Consulting  
Prepared by Joan H. Geismar, Ph.D., LLC  
September 2013

TABLE OF CONTENTS

MEMO TEXT ..... 1

BIBLIOGRAPHY..... 4

TABLE

    1. Identified Archaeological Concerns ..... 3

APPENDIX

    A. Historic Richmond Town’s Known Structures and Features  
        (Updated from Geismar 2001)..... 6

FIGURES

    1. Project Location and APE..... 17

    2. APE Structures and Features ..... 18

    3. Utility Upgrade: Composite Utility Plan (2013)..... 19

    4. Identified Issues ..... 20

PHOTOS

    1. The Center Street entrance to the SIHS administration building..... 22

    2. View west along Center Street from Tysen Court..... 22

    3. View further west on Center Street..... 22

    4. View northeast to a Carriage Factory foundation..... 23

    5. View toward the Bennett House on Block 4441c..... 23

    6. The 1865 Crocheron Privy ..... 23

    7. Block 4441a where the possible foundation of the early-18<sup>th</sup>-century  
        Prall House may be encountered ..... 24

    8. View from the southwest corner of Tysen Court and Center Street ..... 24

Author/Researcher: Joan H. Geismar, Ph.D.  
Assistant Researcher: Shelly Spritzer  
Graphics: Amy Geller

## MEMO REPORT

Archaeological Assessment of Museum Utility Upgrades, Historic Richmond Town  
(Center Street, Tyesen Court and Court Place), Staten Island  
Prepared for the New York City Department of Design and Construction (NYCDDC)  
Capis ID: PVC 341-M  
Prepared through Stantec Consulting  
Prepared by Joan H. Geismar, Ph.D., LLC  
September 2013

This archaeological assessment was undertaken for the NYCDDC through Stantec Consulting with the goal of identifying areas of potential archaeological sensitivity associated with the introduction of new utilities at Historic Richmond Town, Staten Island County (see Figure 1 for the project location and area of potential effects [APE]). The undertaking now addresses an APE somewhat reduced from an earlier configuration that was the focus of an archaeological study in 2001 (Geismar 2001).

The assessment was accomplished by a site visit to update the plan of Richmond Town's features and structures created for the 2001 study (Figure 2). This was then coordinated with a composite utility plan made available by Stantec Consulting (DDC 2013; Figure 3). In addition, information was provided by William (Billy) McMillen, longtime Restoration Director at Historic Richmond Town, now retired, and William Rigby, a former Richmond Town curator and restorer. Mainly this pertained to the Stephens-Prier House built as a residence on Block 4437 that now serves as the Staten Island Historical Society's (SIHS) administration building (Photo 1). This structure and its lot were added to the updated area of potential effects (APE).

The Stephens-Prier House, erected between 1857 and 1859 (LPC 1999), proved to comprise the earliest development within Block 4437 (McMillen 2013: personal communication; Rigby 2013: personal communication). It should be noted that a stone-lined well associated with the house remains intact just southwest of the structure (Rigby 2013: personal communication), and the site of an outhouse, with its abandoned privy pit, is probably located on the property. Bill Rigby, who once owned and occupied the house, has identified the location of the well in what is now the building's front yard on Center Street. This would have been considered the backyard when 3672 Richmond Road, the building's original entrance, was its primary access rather than 249 Center Street, its current entrance (Rigby 2013; LPC 1999). The well, which Bill Rigby has located 1.5 ft (0.46 m) below the current ground surface (Rigby 2013: personal communication), will not be affected by the proposed construction (see Figure 4).

The addition of the Stephens-Prier House is not the only change to the project APE since 2001. Individual Blocks 4443, 4463, 4441, and 4442 in 2001, have been combined to become Block 4441. To distinguish them for the purpose of this study, former Block 4443 is designated Block 4441a, 4463 is 4441b, 4441 is 4441c, and 4442 is 4441d. It should be noted that much of Block 4441b (formerly Block 4463) was eliminated from the revised APE as was Block 4444N located west of Arthur Kill Road.

Of major concern is the introduction of deeply-buried sanitary sewers in Richmond Town's road beds and their connections to standing structures. At issue are the potential remains of now-demolished historical structures and features, some of them dating to Richmond Town's

18<sup>th</sup>-century development, a time period that predates its selection as the County Seat in 1729 (LPC 1999: 2).<sup>1</sup> This early development, which included a county jail and a church within the APE, occurred in the vicinity of Center Street and Arthur Kill Road and spread eastward over time. Consequently, among the potential issues is the development of what has been designated the One-Acre Lot (speculatively in the vicinity of Blocks 4441a and 4441b) in and adjacent to Center Street west of Tysen Court (for example, see sites 1, 2, 3 on Figure 2 and Photo 2). This early development (arguably dating to 1699) apparently included mid-18th-century structures such as a tavern, a small house, and a stable.

A related but perhaps less likely concern is the former site of the 1769 Presbyterian/ Reformed Dutch Church (burned during the Revolution) and its successor on the same site, the mid-19<sup>th</sup>-century Reformed Dutch Church (Figure 2, Block 4441b, A). An associated graveyard is only speculative for the early church but documented for the later one (Figure 2, Block 4441b, B). Although burials were removed from the 19<sup>th</sup>-century burial ground of the Reformed Dutch Church and reinterred in the Moravian Cemetery in 1885, as noted in 2001, it is possible that burials remain west of the former church structure on Block 4441b near the intersection of Arthur Kill Road and Center Street. A burial ground that might have been associated with the pre-Revolutionary War church actually could be anywhere in the vicinity of the church site. The northern portion of this successively-developed site, now vacant, is within the projected construction area for Center Street utilities (see Figures 3 and 4; Photo 3). While road grading that apparently extended into Block 4441b has occurred, and street utilities have been installed (note the Center Street pavement patching documented in Photo 2), archaeological resources can be extremely tenacious and the potential sensitivity of the Center Street APE between Arthur Kill Road and Tysen Court cannot be ruled out.

A new sewer is also a concern in the vicinity of the Rezeau-Van Pelt burying ground (Figure 2 and 3, Block 4441d, F), a small family cemetery located next to the 19<sup>th</sup>-century 3<sup>rd</sup> County Court House on the southeast corner of Tysen Court and Center Street (see Photo 4). The burying ground, active during the late 18<sup>th</sup> century, was first defined by a fence in the 1850s. Given its great age and long-term use (until c. 1865), the boundaries defined by this fence cannot be fully relied upon. The westerly portion of the sewer line on this block is the concern regarding potentially unmarked burials.

A sewer line will also traverse what is conjectured to be a possible site of the early-18th-century Prall House foundation (Block 4441a, W: Figures 2 and 3; see Photo 5), one of several proposed sites for this 1723 structure. As planned, another nearby line will also bisect the Crocheron Privy (GG also on Block 4441a; Figures 2 and 3). This elegant, mid-19<sup>th</sup>-century privy superstructure (Photo 6) was relocated from Woodrow Road and reconstructed at Richmond Town. While not in its original location, it is a fine example of a large privy house associated with a well-to-do 19<sup>th</sup>-century Staten Island family (see Geismar 1987, 1989).

While sewer installation is a primary concern, shallow utilities, that is, water, gas, and electrical lines, cannot be ignored where they will cross known or suspected foundations and features. Among them are two foundations on Block 4441c, one (F on Figure 3) is the site of Ambrose G. Taylor's home erected in 1845 (Photo 7), the other (S, Figure 3) is possibly the

---

<sup>1</sup> The 1999 LPC Designation Report for the Stephens-Prier House includes an excellent development history of Richmond Town.

buried foundation of an 1868 building (frame?) associated with a mid-19<sup>th</sup>-century Carriage Factory complex (Photo 8). Recommendation for these two issues include relocation of the electric line in the vicinity of the Ambrose G. Taylor foundation and testing prior to construction and avoidance if necessary for the potential Carriage Factory foundation. A compilation of identified structures and features found throughout the APE is presented in Appendix A.

And, finally, it has been speculated that Richmond Road, which defines the APE's northern limit, was once an Indian Path (Bolton 1922: 193). However, Native American resources are not documented at Richmond Town despite extensive and ongoing excavation, nor do they appear to be an issue within the APE. This is not surprising since the criteria for extended use by these early populations (such as high ground adjacent to fresh water) are not met within the APE although an isolated artifact is always a possibility. In addition, most of the shallow subsurface levels within the APE, where these resources usually are found, have been disturbed by extensive historic-era use and development.

Table 1 identifies the six known and potential archaeological concerns discussed here and offers recommendations. The findings are also graphically illustrated in Figure 4. It should be noted that the possibility of encountering undocumented burials indicates that a bioarchaeologist should be on call during utility excavations in the vicinity of the former church cemeteries on Center Street and testing and monitoring adjacent to the Rezeau-Van Pelt burying ground. It should also be noted that these recommendations are subject to revision based on the findings made during testing and subsequent construction. This pertains particularly to the extent of monitoring required.

Table 1. RICHMOND TOWN UTILITIES Identified Archaeological Concerns (see Figure 4)

Block No.	MAP ID	Name/or Type of Structure/Feature	Dates	Proposed Infrastructure	Remarks and Recommendations
4441a & b (bordering Center St)	1,2,3	One-Acre Lot: (3) Historic Structures	1699-1755	Electric and water lines within and adjacent to the road bed	Center St between Arthur Kill Rd and Tysen Ct is the possible location of these resources. <b>Recommendation: Monitoring during excavations</b>
4441a	W	Prall House Foundation (possible)	1723 - ?	Sewer line	This site is speculative; <b>Recommendation: Test Trench prior to sewer construction</b>
4441a	GG	Crocheron Privy	1865 - present	Sewer line	A mid-19 <sup>th</sup> C privy structure relocated from Woodrow Rd. Non-functioning, but a historical feature. <b>Recommendation: Relocate</b>
4441c	F	Ambrose G. Taylor House Foundation	1845 - c 1952	Electric line	Although relatively shallow, the proposed line should avoid impact to the resource. <b>Recommendation: Reroute electric</b>
4441c	S	Carriage Factory Foundation	1868 - 1938	Sewer line	Standing foundation. <b>Recommendation: Test Trench prior to construction/Avoidance if warranted</b>
4441d	F	Rezeau-Van Pelt Burying Ground	18 <sup>th</sup> C - present; active until c. 1865	Sewer line	A sewer line will run along the N side of the burial ground. Although fenced in 1850, the cemetery's early parameters are unknown. <b>Recommendation: Test Trench prior to excavation/Monitoring during excavation if warranted</b>

## BIBLIOGRAPHY

Baughner, Sherene, Edward J. Lenik, Stephen Barto, Kate Morgan, Daniel N. Pagano, and Robert W. Venables

1989 An Archaeological Planning Model of Richmondtown Restoration, Staten Island, New York. Prepared for the New York City Landmarks Preservation Commission. March 1989.

Clark, Richard

2000 Personal communication. Graduate Student [in 2000] Graduate Center, City University of New York.

DDC

2013 Historic Richmond Town Museum Utility Upgrades. Composite Utility Plan (U-003.00). New York City Department of Design & Construction. May 16, 2013. Though Stantec Consulting.

Geismar, Joan H.

2001 Historic Richmond Town, Tysen Court and Center Street Reconstruction, Archaeological Sensitivity Assessment (Capital Project PV341-M). Prepared for the New York City Department of Design and Construction (DDC), through F.S.T. of New York, Inc. Prepared by Joan H. Geismar, Ph.D. February 2001.

1999 Historic Richmond Town, Archaeological Field Testing, May 1999 – Letter Report. Prepared for the Staten Island Historical Society. Prepared by Joan H. Geismar, Ph.D. June 1999.

1989 The Jacob Crocheron House (The Woodrow Road House) Archaeological Investigation. Prepared for the Staten Island Historical Society. Prepared by Joan H. Geismar, Ph.D. Part 2. June 1989.

1987 The Jacob Crocheron House (The Woodrow Road House), An Historical and Archaeological Assessment. Prepared for the Staten Island Historical Society. Prepared by Joan H. Geismar, Ph.D. September 14, 1987. Part 1.

Liber of Deeds

1825 Liber O:222. Richmond County Clerk's Office, Staten Island.

LPC

1999 Stephens-Prier House, 249 Center Street (aka 3672 Richmond Road), Borough of Staten Island. Designation Report. Landmarks Preservations Commission. May 25, 1999; Designation List 305 LP-2022.

McMillen, William

2013 Personal communication. Director of Restoration (Retired), Historic Richmond Town, Staten Island.

## BIBLIOGRAPHY (Continued)

Topographic Maps of Richmond County

1910/1911. Borough of Richmond Topographic Survey. On file, Richmond Borough Hall, Staten Island. No. 54.

Rigby, William

2013 Personal communication. Former Richmond Town curator and former owner and restorer of the Stephens-Prier House. Cooperstown, NY.

SIHS

2013 [Richmond Town] Village Map. Historic Richmond Town. Online  
<http://www.historicrichmondtown.org/village-map>.

USGS

1981 *Arthur Kill Quadrangle* 1966 photorevised 1981. United States Geological Survey. Reston, VA.

Wohl & O'Mara

1986 Topographic Survey of Richmondtown Restoration Area. Capital Project No. PV 341- Civil Engineers and Land Surveyors. 544 Vanderbilt Ave., Staten Island, NY.



APPENDIX A  
Historic Richmond Town's Known Structures and Features  
(Updated from Geismar 20

**HISTORIC RICHMOND TOWN Block 441a (former 4443) Known Structures and Features (Figure 4)**  
 existing structures in bold type & italicized; **18<sup>th</sup> C** **19<sup>th</sup> C** **20<sup>th</sup> C**

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	15	First County Jail	c1710 - c.1741	First structure on lot; possibly in private use after 1741; may have been converted into inn by Dr Thomas Frost (McMillen in Baughet <i>et al.</i> 1989)
B	15	Inn	c 1789 - c 1830	Dr. Thomas Frost inn
C	15	Brall House	1723? - ?	Possible location of the Brall House - 1723 Edsall Survey; 1971 excavation uncovered no evidence of colonial house (see V. & W.)
D	15	Shoe Shop	c 1859 - c 1867	John J. Wendling Shoe Shop; appears on various 19 <sup>th</sup> C maps (1850 Dripps, Butler 1853, & Walling 1859)
E	15	Mersereau Barn	1821 - 1830	Noted in deed Liber O:222 (1825); probably demolished 1830
F	15	Hitching Shed	c 1878 - c 1891	Located near Mersereau barn ("E" above) demolished between 1885 & 1891
G	15	Shed	1878 - 1891	Built as Richmond County Hall (hotel); demolished after property acquired by Church of St. Andrew c 1890
H	15	Skinner-White House	c 1759 - 1809	Possibly a school house (1783-1786) that extended into street bed at NE corner of Arthur Kill Rd & Richmond Rd intersection; possibly bordered 18 <sup>th</sup> C pond "J"
I	15	Barn	c 1759 - ?	Associated with "H"; possibly bordered 18 <sup>th</sup> C pond "J"
J	15	Pond	18 <sup>th</sup> C	Possibly 17 <sup>th</sup> C; filled 1826-29
K	15	Richmond County Hall (hotel)	c 1826/29 - 1891	Closed 1879; replaced by Parish house of Church of St. Andrew in 1891; ("L" below); built on former sites of "H," "I," possibly part of "J"
L	15	Parish House - Church of St. Andrew	1891 - 1929	Built on p/o "K" and completely within limits of "J" above; in use until 1924; demolished 1929; on p/o site "K" and completely within limits of "J"
M	15	Parish house Storage Shed	1891 - 1929	After demolition became site of a Police Watch Station (shanty) & recreation facility
N	11	<i>Guyon Store</i>	<i>c 1819 - present</i>	<i>James Guyon, merchant; bought by John S. Edwards 1835; converted to dwelling; in Edwards family until 1913</i>
O	11	Building (use unknown)	c 1874? - c 1891/98	Unid; faced Center St
P	11	Barn	c 1911/17 - 1932	Possibly built by McCall & Turner, owners 1913 - 1918
Q	11	Garage	c 1911/17 - 1932	Same as "P"

**HISTORIC RICHMOND TOWN Block 4441a (former 4443) Known Structures and Features (Figure 4)**  
 (Continued) existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
R	11	Garage	c 1937 - c 1964/66	Puntillo family owners - builders
S	11	Building	c 1926 - 1936	Small; unid
T	11	Privy	c 1911 - 1960/70s?	30 ft (9.1 m) beyond rear of Guyon Store (later Edwards House) on 1911 Topo; excavated 1960s/1970s
<i>U</i>	<i>11</i>	<i>Barn Foundation</i>	<i>1972 - present</i>	<i>Constructed by RTR</i>
V	8	Swaim House	c 1767 - early 19 <sup>th</sup> C	Possible location of the Prall House c 1723 ("C" & "W" are other possibilities); may be Mathias Swaim's residence until 1767; demolished by 1850; then site of the Edwards-Barton House (see "X")
W	8	Prall House	c 1723	Another possible location of the Prall House (see "C" and "V" above for other possible locations)
<i>X</i>	<i>8</i>	<i>Edwards - Barton House</i>	<i>c 1870 - present</i>	<i>Built by J. Wehley/Deborah M. Edwards; by 1898, owner, their daughter, Ella Barton; remains in family until 1921</i>
Y	8	Aquilino's Store & Restaurant	c 1926 - 1966	Former Edwards property (see "X")
Z	8	Shed	c 1926 - c 1936/52	Not on 1953 Damage Map
AA	8	Privy	c 1911 - c 1960/70s	Edwards family privy? 5 x 6 ft (1.5 x 1.8 m); 40 ft (12.2 m) beyond SW (rear) corner of Edwards - Barton House; excavated 1960s/1970s
BB	8	Privy/Cistern?	c 1911 - c 1960/70s	2 x 3 ft (0.61 x 0.91 m); c 12 ft (3.7 m) beyond SW (rear) corner of Edwards - Barton House; use not fully determined; excavated 1960s/1970s
CC	8	Garage	c 1917/26 - c 1981	Near W lot boundary
<i>DD</i>	<i>1</i>	<i>County Clerks Office (Historical Museum)</i>	<i>1848 - present</i>	<i>Altered 1933-38; became Historical Museum; site may include cistern (rear) built by 1885.</i>
EE	1	Outbuilding	c 1878 - c 1908 c 1911 - c 1926/35	Succession of buildings; one possibly a water closet; first appears on 1878 Sanborn; probably removed between 1898 & 1907
FF	6	Insurance Office	1876 - c 1926	Built by Henry B. Metcalfe for Richmond County Mutual Insurance Company; New York Title Company occupied building 1916 - 1917
<i>GG</i>	<i>8</i>	<i>Privy</i>	<i>1865? - present</i>	<i>Crocheron privy dismantled &amp; relocated from Woodrow Rd in 1987; reconstruction at Richmond Town post-dates Baugher et al. 1989</i>
HH	8	Swaim's "Waggon" House	c 1802 - ?	Noted on 1802 survey; possibly extended to or located within bed of Court Pl; location on Figure 4 approx

**HISTORIC RICHMOND TOWN Block 441b (former 4463) Known Structures and Features (Figure 4)**

existing structures in bold type & italicized; 18<sup>th</sup> C, 19<sup>th</sup> C, 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	13	Presbyterian & Dutch Reformed Church	1769 - c 1776	Possible relocation of the Stony Brook Presbyterian Church to Richmond where it joined the Dutch Reformed Church in 1769; destroyed during the Revolutionary War; Reformed Dutch Church rebuilt on site in 1808 as (see "C" below); structure moved to Block 441c Lot 12 1885/1887 (see Block 441c "V")
B	13	Church Burial Ground	18 <sup>th</sup> & 19 <sup>th</sup> C	Burial ground of Reformed Dutch Church; extant through 1885 on W side of 19 <sup>th</sup> C structure (new information) but exact location, size, & number of burials unknown; 21 burials were removed to the Moravian Cemetery between 9/26/1885 & 10/7/1885
C	13	Reformed Dutch Church (later Reformed Dutch Church of Richmond)	1808 - 1885 <sup>3</sup>	Rebuilt on site of "A" in 1808; structure moved to Block 441c Lot 12 in 1885/1887 (see Block 441c, "V"); limited excavation summer 2000 did not reveal any evidence of structure (Clark 2000: pc)
D	13	<i>Parsonage</i>	<i>1855 - present</i>	<i>Associated with second Reformed Dutch Church</i>
E	13	Outbuilding (barn)	c 1855 - c 1912	SE of parsonage; mainly beyond Lot 13
F	13	House, 80 Arthur Kill Rd	c 1912 - 1966	Flake House; a rental property
G	-	-	-	Intentionally left out
H	11	House, 468 Clarke Ave	c 1911 - 1965	Flake House; a rental property
I	11	<i>Outbuilding (garage)</i>	<i>c 1912 - present</i>	<i>Possible former garage for 80 Arthur Kill Rd; now Parsonage garage</i>
J	7	House, 332 Center St	c 1869/73 - 1965	Putnam Family long time owner/occupants; William Putnam a harness-maker/postmaster & Martha Bedell, postmistress/storekeeper 1870s-1880s; 1873, a post office in building; remains in family until 1906; various owners until 1953
K <sup>s</sup>	5	House, 328 Center St	c 1869/73 - 1965	Rental property owned by the Putnams; possibly occupied by Peter Nolan or William Richardson 1870-1873
L	5	Outbuilding (vault)	c 1910 - 1965	Originally an office vault behind 328 Center St
M	7	Barn	1878 - 1907/11	For 332 Center St "J" above)
N	7	Outbuilding (privy)	c 1911 - c 1960/70s	Associated with 332 Center St; excavated 1960s/1970s
O	5	Outbuilding (privy)	c 1911 - c 1960/70s	Associated with 328 Center St; excavated 1960s/1970s
P	7	Garage	1935 - 1965	Frame structure; 332 Center St

**HISTORIC RICHMOND TOWN Block 4441b (former 4463) Known Structures and Features (Figure 4)**  
 (Continued) existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
Q	7 & 5	<i>New Dorp Railroad Station</i>	1965 - present	<i>Relocated to Richmond Town; museum building</i>
R	7	<i>Annadale Railroad Station</i>	1975 - present	<i>Relocated to Richmond Town; museum building</i>
S	4&1	Court House Hotel	1855/58 - 1942/43	Joseph Lytle probable owner/builder; sells to Jeremiah Vail 1864; George Sharpe owner 1867-1898; a hotel until 1920; various hotel keepers including E. Jaedwer, H. Baruth and W. Killymeyer [Killymeyer]; a bar in 1930
T	4&1	Outbuilding (shed)	c 1878 - c 1911	Associated with Court House Hotel

**HISTORIC RICHMOND TOWN Block 4441c (former 4441) Known Structures and Features (Figure 4)**  
 existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	22	<i>Bennett House</i>	1837 - present	<i>Private residence, then a store, post office &amp; restaurant(s) with outbuilding; later Carpenter's Shop erected on lot ("E" below).</i>
B	22	Outbuilding (barn)	1878 - c 1911	One-story, replaced or expanded to two stories 1884-1891; replaced by privy by 1911 ("C" below); between 1926 & 1935 an auto garage approx at same location ("D" below)
C	22	Privy	1911- 1926/35	On 1917 Topo map; replaced by garage ("D" below); excavated 1960s/1970s
D	22	Outbuilding (garage)	c 1926/35 - 1965	Built on site of "C" (above)
E	22	<i>Carpenter's Shop</i>	1966 - present	<i>Constructed by RTR</i>
F	25&26	Ambrose G. Taylor House (3722 [formerly 722] Richmond Rd)	c 1845 - c 1952	Taylor a blacksmith & tinker; residence (fronting on Richmond Rd)
G	26	Ambrose G. Taylor House (3722 - formally 722 - Richmond Rd [rear])	1862/67 - c 1898 - 1907	Residence; rental property
H	26	Ambrose G. Taylor, Shop	c 1848 - c 1914	Blacksmith & tinker shop; shop section demolished by 1954

**HISTORIC RICHMOND TOWN Block 441c (former 441) Known Structures and Features (Figure 4)**

(Continued)

existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
I	25	Privy	c 1911 - c 1950	Ambrose G. Taylor/Alvin Ellis property; exact construction date unknown; replaced by chicken coop (not shown on map), then a shed ("J" below); excavated 1960s/1970s
J	25	Outbuilding (shed)	c 1963 - c 1969	Removed by RTR
K	26	Privy/Shed	c 1911 - c 1960/70s	6 ft (1.8 m) square excavated 1960/1970s
L-O	30	Outbuildings (4)	c 1878 - 1898/1911	Carriage Factory complex ("P," "Q," "S" below)
P	30	<i>Schwiebert House</i>	<i>1910 - present</i>	<i>John F Schwiebert's residence; in Schwiebert Family until 1944; extensive alterations</i>
Q	30	Privy	c 1911 - c 1960/70s	Possible privy on Schwiebert's lot line ("P" above)
R	32	<i>The Carriage Factory (brick foundation with frame extension in rear)</i>	<i>1854-1945 present</i>	<i>Brick &amp; wood frame factory buildings; John F. Schwiebert in 1901; converted to auto body repair shop by 1933; wood building demolished 1938, brick building 1945; partially reconstructed 1971</i>
S	32	Carriage Factory foundation (frame)	1868 - 1938	P/o Carriage Factory complex (see "L-O," "P," "Q," "R")
T	4	Guyon Tinsmith Shop	c 1870- c 1881	First documented on 1873 Tax Assessment
U	32	<i>Storage Shed</i>	<i>1967 - present</i>	<i>Constructed by RTR</i>
V	12	Original 1808 Reformed Dutch Church/ Carriage Repository	c 1885/87 - 1903	Reformed Dutch Church relocated c 1885/87 from Block 4463; used as carriage repository until 1903
W	12	Outbuilding	c 1878 - 1885/87	1-story outbuilding; another outbuilding later on same site ("X" below)
X	12	Outbuilding	c 1911 - c 1927	Appears to be same site as "W" (above)
Y	9	House, 279 Center St	c 1922 - 1956	Klussman residence until RTR in 1963; human bones purportedly found during house construction
Z	12	House, 283 Center St	c 1922 - 1965/66	Baumann residence; successive owners documented
AA	12	Garage	1953? - 1965	Frame garage; demolished/removed
BB	9	Garage	1953? - 1956	Frame garage; demolished/removed
CC	9 & 12	<i>Transportation Museum</i>	<i>1967/68 - present</i>	<i>Constructed by RTR</i>

**HISTORIC RICHMOND TOWN Block 4441c (former 4441) Known Structures and Features (Figure 4)**  
 (Continued) existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
<i>DD</i>	15	<i>Stephens -Black House &amp; Store</i>	<i>1837 - present</i>	<i>Stephen D. Stephens builder/occupant 1837; sold to Mary Black &amp; two daughters 1840; altered over time &amp; reconstructed by 1964</i>
EE	15	Outbuilding (barn)	c 1878 - 1935	P/o former Stephens residential complex; later additions included storage wing & another barn ("FF" below)
FF	15	Outbuilding (ba	c 1878 - 1935	P/o Stephens - Black complex ("EE" above)
GG	15	Outbuilding (privy?)	c 1911 - 1960/70s	Rear of Lot 15; Stephens -Black property
<i>HH</i>	15	<i>Eltingville Store</i>	<i>c 1961 - present</i>	<i>Relocated to Richmond Town</i>
<i>II</i>	15	<i>Colon Store</i>	<i>1969 - present</i>	<i>Relocated to Richmond Town</i>
<i>JJ</i>	15	<i>Privy</i>	<i>1968 - present</i>	<i>Relocated to Richmond Town from Journey House, Richmond Valley, in 1968; built c 1860</i>
KK	15	Mersereau Carpenter Shop	c 1841 - c 1849	Exact location unknown
<i>LL</i>	1	<i>Storage shed</i>	<i>Post 1989 - present</i>	<i>First structure indicated on this lot</i>
<i>MM</i>	?	<i>Seaman's Cottage</i>	<i>1836 - present</i>	<i>An example of cottages erected entrepreneurially by Henry Seaman. This one brought to Richmond Town from Richmond in 2004 (SIHS 2013)</i>

**HISTORIC RICHMOND TOWN Block 4441d (former 4442) Known Structures and Features (Figure 4)**  
 existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	24	Carriage Shed/Garage	1902?/07 - 1965	By 1907 but possibly earlier; p/o Court House Hotel complex ("B," "C," & "D" below); possibly built by Julius Dobler owner in 1902
B	24	Shed/Garage	1907 - 1965	By 1907 but possibly earlier; p/o Court House Hotel complex (see "A," "C," & "D"); possibly built by Julius Dobler owner in 1902
C	24	Barn/Garage (2-story)	1902?/07 - c 1935	By 1907 but possibly earlier; p/o Court House Hotel complex ("A," "B," & "D"); possibly built by Julius Dobler owner in 1902
D <sup>H</sup>	24	Shed	1911 - c 1960/70s	Shed (11 x 5 ft) shown on 1911 Topo Map possibly p/o Court House Hotel complex ("A," "B," "C"); possibly built by Julius Dobler owner in 1902

**HISTORIC RICHMOND TOWN Block 441d (former 4442) Known Structures and Features (Figure 4)**

(Continued)

existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
E	24	<i>Gatehouse/Watchman's Shanty (RR gatehouse)</i>	1965 - present	<i>Relocated to Richmond Town; associated with New Dorp RR Station</i>
F	31	<i>Rezeau-Van Pelt Cemetery</i>	18 <sup>th</sup> C - present	<i>Enclosed by modern wood fence with remnant of mid-19th C iron fencing extant; in use until c1865</i>
G	11	<i>Third County Court House</i>	1837 - present	<i>Two stories; Court House &amp; Center St openings coincide; included jail facility until 1860 (see "H" below); site is the highest elevation in the village</i>
H	11	Third County Jail	1860 - 1903	Third & Fourth County Jail built on same site
		Fourth County Jail	1903 - 1959	Fence remained until RTR parking lot was created 1968/1969
T	11	Outbuilding	c 1878 - c 1898	Two-story barn/stable. W of jail
J	11	Outbuilding	c 1878 - c 1917	Two-story barn/stable; replaced by garage in 1926
K	11	Outbuilding	c 1878 - 1898	Replaced by unid building c1898-c 1917; garage in 1926
L	11	Outbuilding	c 1878 - c 1917	Possibly replaced by larger building by 1953; later building not discussed in Baugher <i>et al.</i> 1989
M	11	Outbuilding	c 1898/1911	Unid; built after 1898
N	11	Outbuilding	c 1911 - c 1917/1926	Marked "filter bed" on 1917 Bromley Atlas
O	11	Jailer's Cottage	1903 - 1959	Component of Fourth County Jail
P	46	House, 284 Center St	1837 - 1959	Owners: Henry Seaman 1837; Farnham Hall 1839; Lewis Marsh 1840-45; B. Lytle 1849; Ann Cole c 1860-97; Susan Cole Bedell sells to Herman Siemer 1897/98; Flake owner by 1920s; Church of St. Andrew bought structure in late 1950s; relocated and used as parsonage
Q	46	Barn	c 1845 - c 1917	Possibly barn mentioned in 1845 deed; possible late 19 <sup>th</sup> C construction
R	46	Garage	c 1926 - 1959	Probably demolished when house at 284 Center St was moved to Church of St. Andrew
S	46	Privy	c 1911 - c 1960/70s	Herman Siemer owner in 1911; not excavated
T	46	Well	c 1911 - c 1960/70s	Possibly earlier; associated with 284 Center St (6 ft x 6 ft (1.8 m x 1.8 m); Herman Siemer owner in 1911; excavated 1960s/70s



**HISTORIC RICHMOND TOWN Block 441d (former 442) Known Structures and Features (Figure 4)**  
 (Continued) existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
U	46	Outbuilding	c 1911 - c 1960/70s	Herman Siemer owner in 1911; excavated 1960s/70s
<i>V</i>	<i>51</i>	<i>Public School 28</i>	<i>1908 - present</i>	<i>SIHS library, archives, offices</i>
W	51	Water Closet(s)	c 1911 - c 1960/70s	Possibly a school sink structure associated with PS 28 ("V" above); excavated 1960s/70s
X	51	Outbuilding	c 1911 - c 1960/70s	Unid; associated with PS 28 ("V" above)
Y	1	Prier ice house	c 1870 - c 1917	James Prier, a butcher; ice house used to store meat
Z	1	Outbuilding	c 1874 - 1878/1907	Possibly associated with Prier's ice pond ("BB" below)
AA	1	Outbuilding	c 1874 - 1878/1907?	Identified as an outbuilding by Baugher <i>et al.</i> (1989: 194)
BB	1	Ice Pond?	Late 19 <sup>th</sup> C	Possibly the James Prier Ice Pond
CC	1	Barn	c 1911 - c 1917	Possibly the former James Prier ice house ("Y" above)
DD	1	Outbuilding	c 1911 - 1917	James Prier owner; unid small structure N of barn "CC" above
EE	1	Barn	c 1910 - c 1927	James Prier owner; near N boundary of lot; attached to "FF" & "GG" below
FF	1	Shed	c 1911 - c 1927	James Prier owner; near lot's N boundary; attached to "EE" above
GG	1	Shed	c 1911 - c 1927	James Prier owner; near lot's N boundary; attached to "EE" above
HH	1	Shed	c 1911 - c 1917	James Prier owner; W of "EE" above
II	1	Shed	c 1911 - c 1917	James Prier owner; W of "EE" above
JJ	1	Shed	c 1911 - c 1917	James Prier owner; W of "EE" above
<i>KK</i>	<i>11</i>	<i>Parking - Lot Gatehouse</i>	<i>1965/69 - present</i>	<i>Constructed by RTR</i>
LL	11	Garage	1926 - 1936?	On site of "J" & "K" above; discussed but not located on map in Baugher <i>et al.</i> 1989; location & size on Figure 4 is somewhat speculative

### HISTORIC RICHMOND TOWN The One -Acre Lot: Known Structures and Features (Figure 4)

existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
1	One Acre Lot	House/Tavern; Center St between Arthur Kill Rd & Tysen Ct	c1705/55? 1836/37?	1705 based on ambiguous evidence; in 1765, Richard Cole advertised 2 houses & a stable for sale; Dr Thomas Frost owner in 1769; Moses Dobbs 1781; Frost stays on as tavern keeper until 1785/86 "Cockle Shell Inn"; Daniel Turner makes over 1793; 1798, his property in Doty family until 1798; bought by Isaac Swain in 1798, continues operating inn; dies 1803; his widow hires John Dubois (her future husband), to run inn; they buy property in 1806; the widow Dubois sells to Henry Seaman in 1836; Center St run 1837; all standing structures demolished at that time
2	One Acre Lot	House (small); Center St between Arthur Kill Rd & Tysen Ct	c1755 - 1765?	Only mentioned in 1765 advertisement (see above); Center St run 1837; all standing structures demolished at that time
3	One Acre Lot	Stable; Center St between Arthur Kill Rd & Tysen Ct	c1755 - 1815/36?	Noted in 1765 advertisement (see above) & in 1815; Center St run 1837; all standing structures demolished at that time

### HISTORIC RICHMOND TOWN Block 4437 - Known Structures and Features (Figure 4)


existing structures in bold type & italicized; 18<sup>th</sup> C 19<sup>th</sup> C 20<sup>th</sup> C

Map ID	Lot No	Name and/or Type of Structure or Feature	Dates	Remarks
A	Lot 36	Stephens-Prier House, 249 Center St (aka 3672 Richmond Rd)	1857-1859 to present	Now SIHS administration building. A well located SW of the building will not be impacted by utility installation as proposed (well location identified by William Rigby, a former owner [2013; personal communication])

Abbreviations:


approx = approximate; ident = identified; p/o = part of; RTR = Richmond Town Restoration; SIHS = Staten Island Historical Society; topo = topographical; unid = unidentified

FIGURES

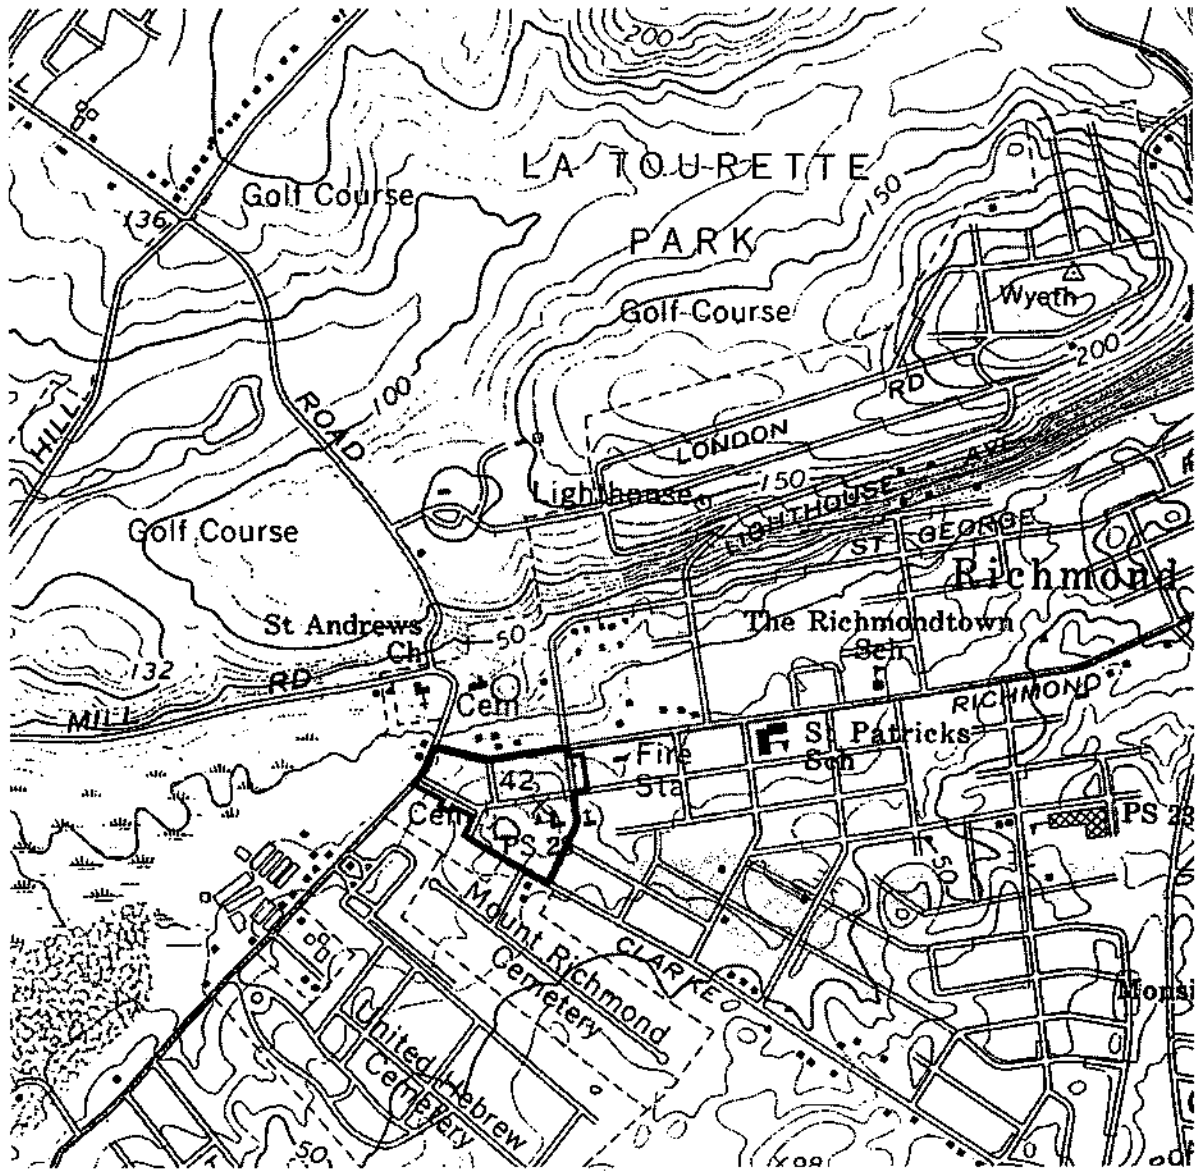

— project APE (approx.)




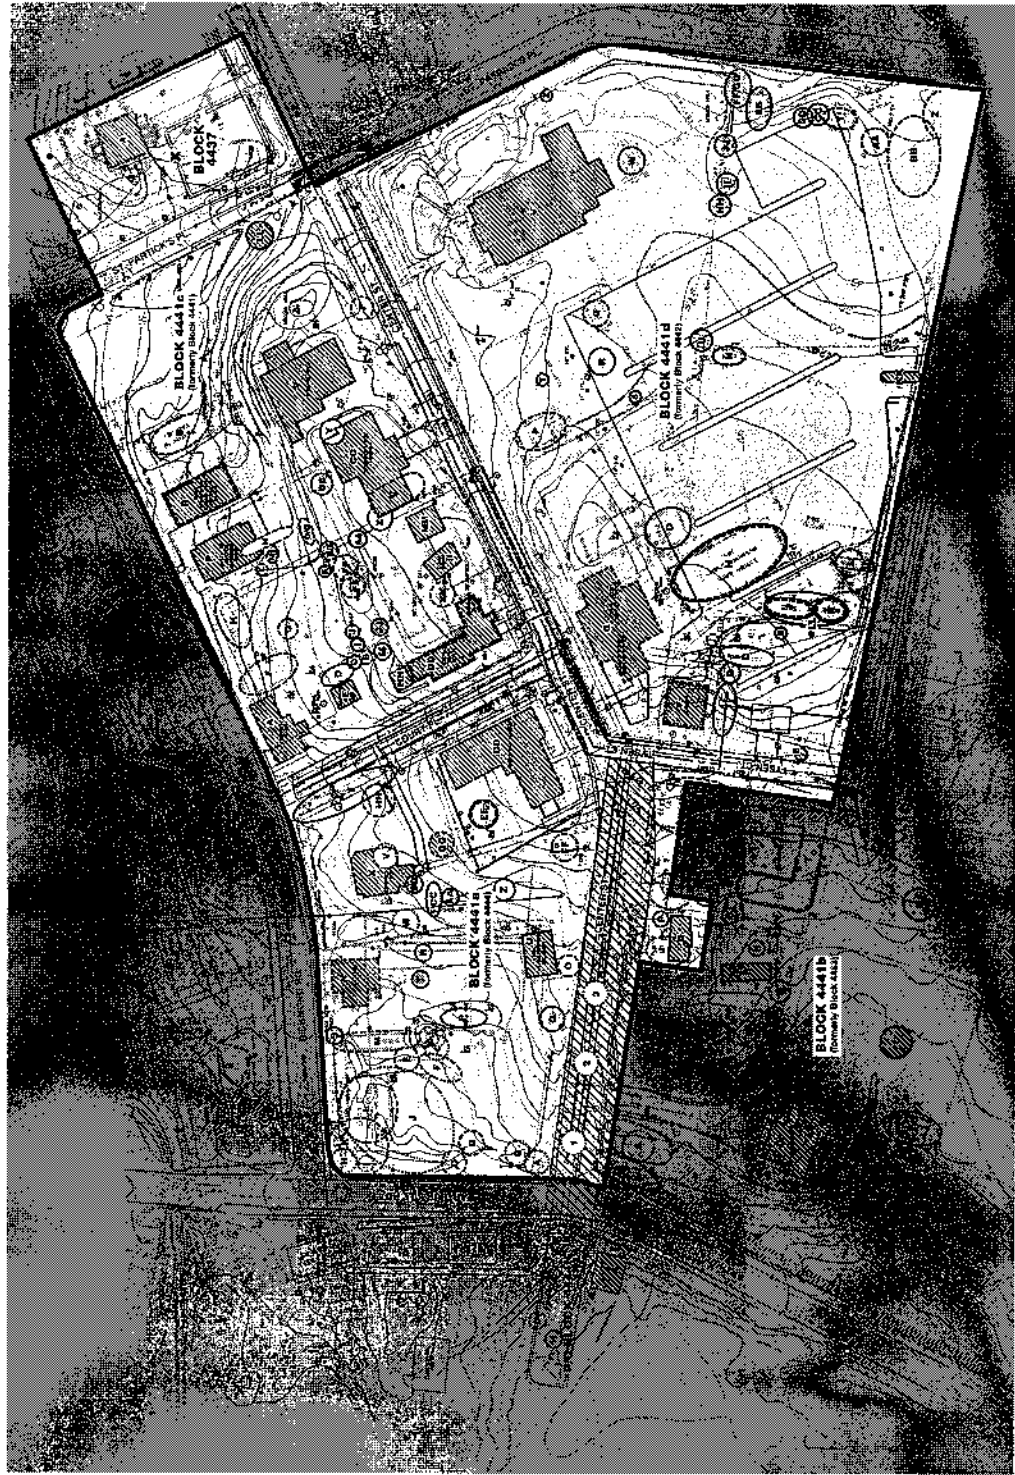

- project APE
- 18th century structure
- 19th century structure
- 20th century structure
- collared APE
- beyond current contract
- standing structure
- One-Acre lot (part of)
- Telephone-Pole well


Based on 1910/11 Richmond County topo maps, Wohl & O'Ware 1986, and Baugher et al. 1989. Grey contour lines are 1910/11, black contour lines are 1986. Base map DOC 2013 and Geismar 2001, updated.



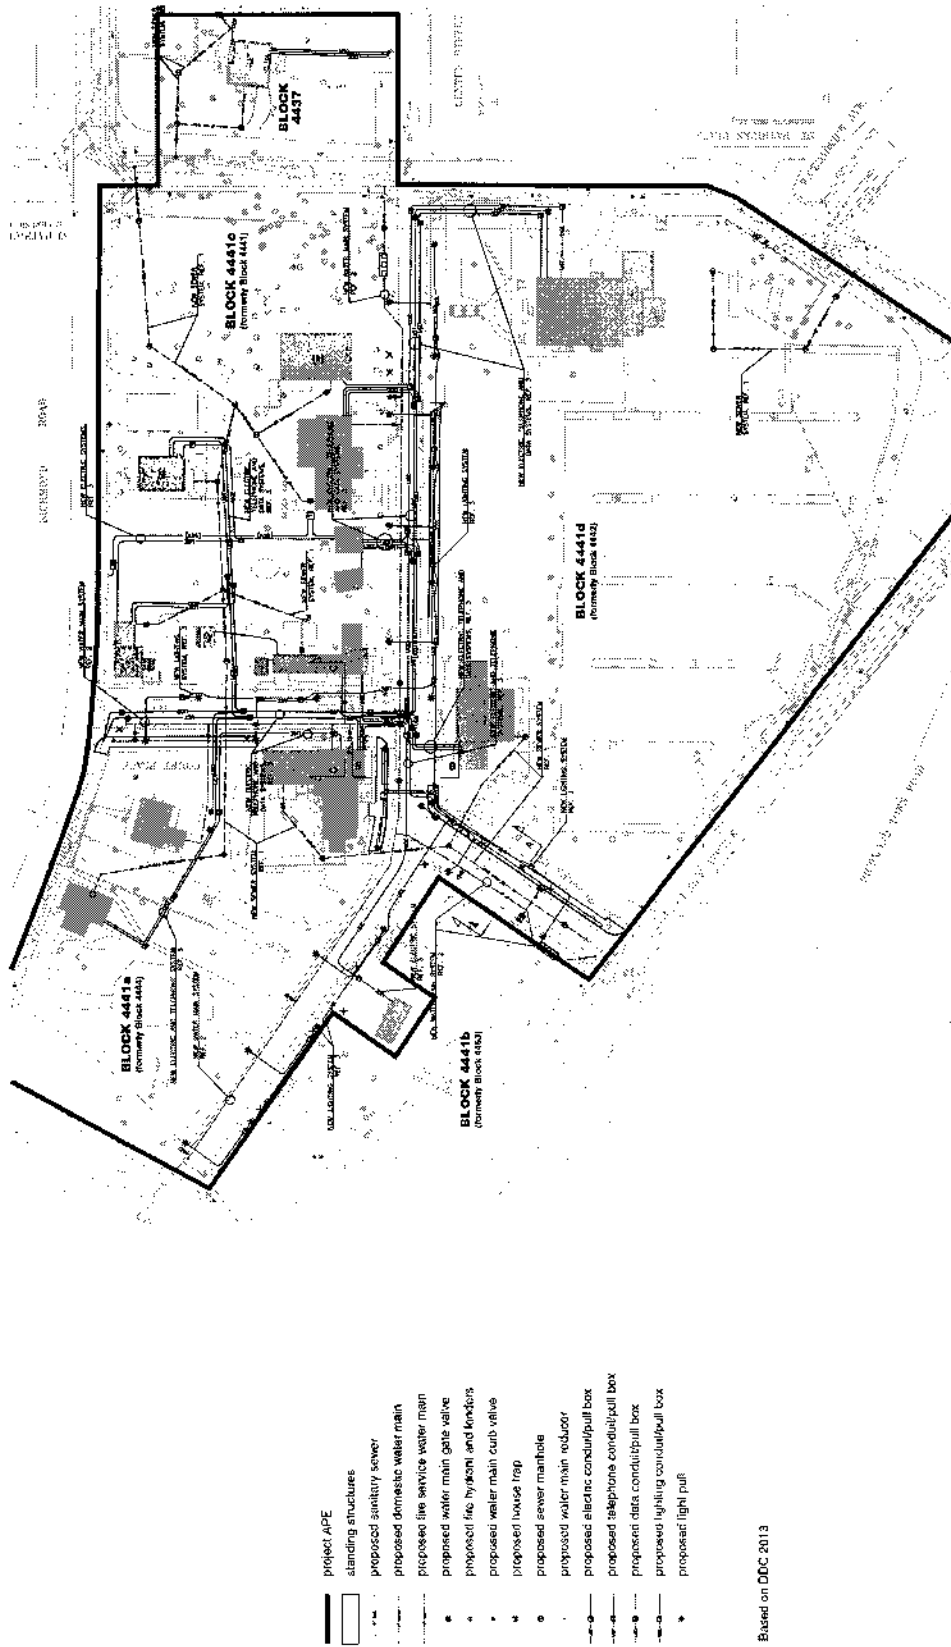

- project APE
- standing structures
- proposed sanitary sewer
- proposed domestic water main
- proposed water main gate valve
- proposed fire hydrant and knockers
- proposed water main curb valve
- proposed house trap
- proposed sewer manhole
- proposed water main reducer
- proposed electric conduit/pull box
- proposed telephone conduit/pull box
- proposed data conduit/pull box
- proposed lighting conduit/pull box
- proposed light pole

Based on DDC 2013

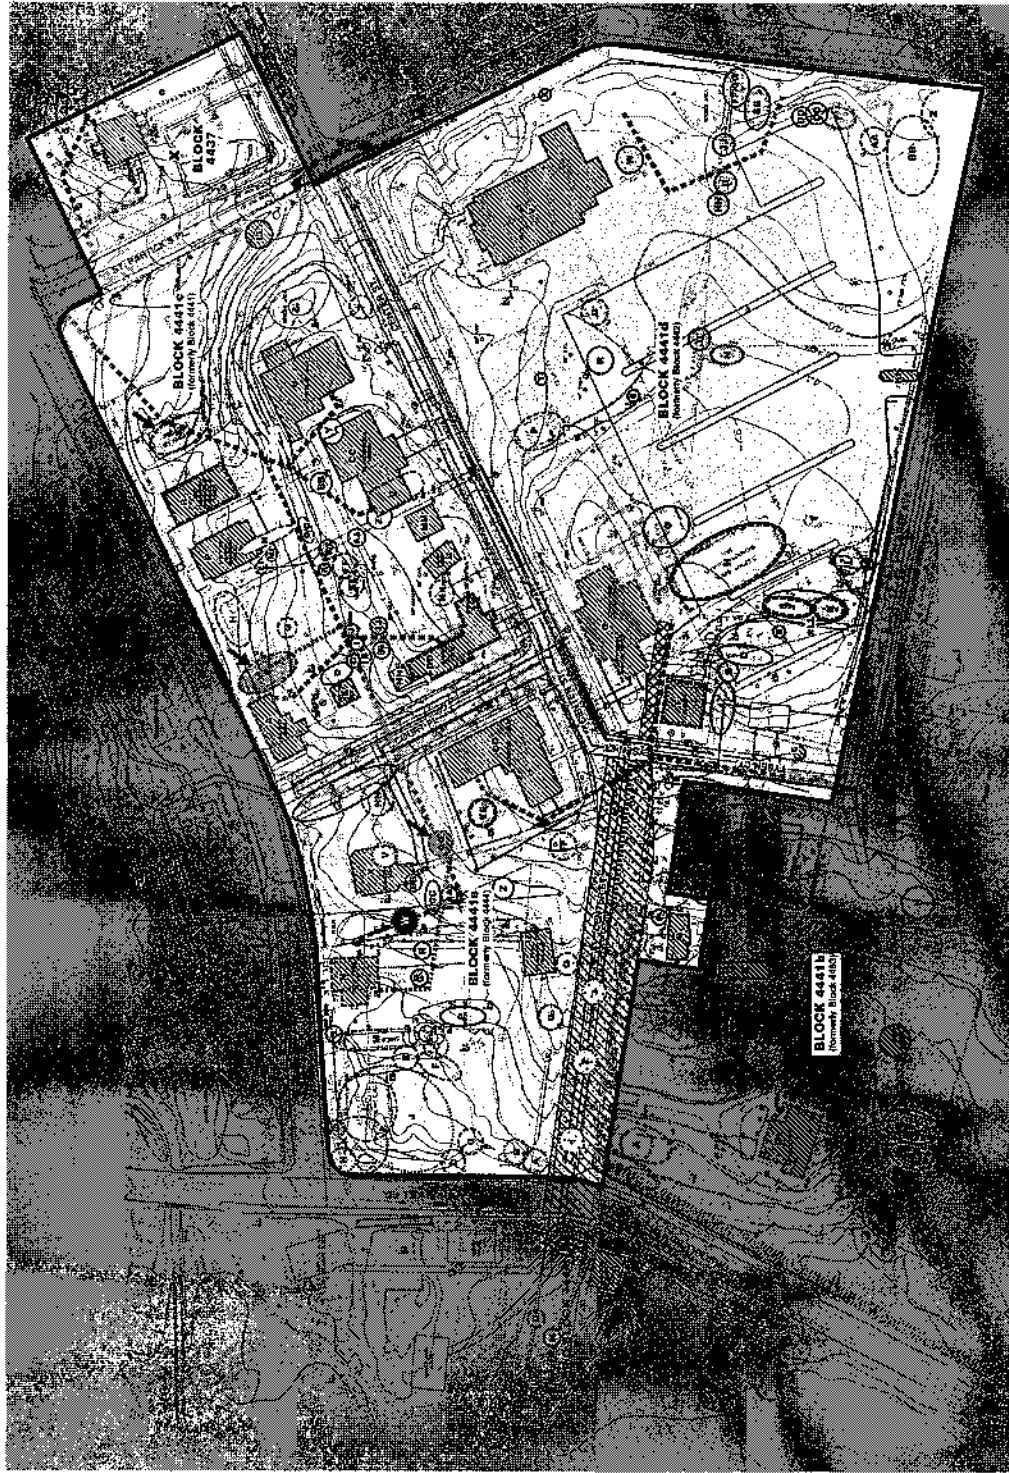

- project APE
- 18th century structure
- 19th century structure
- 20th century structure
- contested APE
- beyond current contract
- standing structure
- One-Acre lot (part of)
- proposed sewer line
- other utility, selected
- to be tested
- to be mentioned
- to be partially tested and monitored
- utility to be relocated?
- Stephens-Pfizer well

Based on 1910/11 Richmond County topo maps, Wohl & O'Mara 1986, and Baugher et al. 1989. Gray contour lines are 1910/11, black contour lines are 1986. Base map DDC 2013 and Geisner 2001, updated.



PHOTOS





**Photo 1.** The Center Street entrance to the SIHS administration building, the c. 1857 Stephens-Prier House on Block 4437, where a sewer connection is planned. The view is north from Center Street. A well is located in the vegetated area to the left, beyond the proposed impact area. (Geismar 8-21-13)



**Photo 2.** View west along Center Street from Tysen Court. Block 4441a is to the right, 4441b to the left. A diner (left foreground), a temporary structure, is located on the former site of the Court House Hotel. Center Street in this area is the purported location of the 18th-century One-Acre Lot. Pavement patching suggests the introduction of infrastructure as does a hydrant to the far right (arrow), but this does not negate the possibility of archaeological discovery. (Geismar 7-30-13)



**Photo 3.** View further west on Center Street with Arthur Kill Road in the background. To the left, at the corner of Arthur Kill Road, is the former site of successive 18th- and 19th-century churches (Block 4441b). Across Center Street to the right (Block 4441a) is the former site of the First County Jail. While grading apparently has occurred on Block 4441b, undocumented burials associated with the churches' burial grounds are a concern. (Geismar 8-21-13)



**Photo 4.** View from the southwest corner of Tysen Court and Center Street looking toward the 3rd County Court House (left) and the Rezeau - Van Pelt Burial Ground (arrow) on Tysen Court. View is southeast. A sewer will be installed on the north side of the burial ground established during the late-18th century. Unknown graves beyond the fenced cemetery are a potential issue. (Geismar 8-21-13)



**Photo 5.** Block 4441a where the possible foundation of the early-18th-century Prall House (c. 1723) might be encountered during sewer installation. Testing within the sewer's parameters prior to sewer excavation is recommended in this possibly sensitive area. (Geismar 8-21-13)



**Photo 6.** The 1865 Crocheron Privy (left) is a relocated and reconstructed structure on Block 4441a now situated behind the Guyon Store and Tavern (c. 1819/1839). As planned, a proposed sewer line will cross the privy's current site. However, since the building is supported on cinder blocks, it temporarily could be moved out of harm's way or be relocated. (Geismar 8-21-13)



**Photo 7.** View toward the Bennett House on Block 4441c. Richmond Road is in the middle foreground. The foundation of the Ambrose G. Taylor House, erected in 1845, is believed to be located in the foreground (arrow) where a new sewer line is planned. (Geismar 8-21-13)



**Photo 8 .** Looking southeast from Richmond Road to the heavily-vegetated, vacant site (arrow) of a former Carriage Factory building (1868) where a sewer line is planned on Block 4441c. The condition of the building's foundation is unknown. To the far right is a partial view of a brick ruin, a remnant of the factory complex. (Geismar 9-6-13)

To: Jeffery Grob, Stantec  
 From: Joan Geismar/Joan H. Geismar, Ph.D., LLC  
 Memo: **Addendum to Museum Utility Upgrades Memo Report dated September 2013**  
 Date: December 10, 2013

Table 1 in the September 2013 report identified six known and potential archaeological concerns and offered recommendations. Since then, however, the NYCLPC has expressed concerns in regard to the introduction of sewer lines on the north side of the Stephens-Prier house on Block 4437. In addition, the location of the Crocheron Privy on Block 4441a has been reassessed and is no longer an issue. However, the question remains whether sewer excavations may encounter a buried feature where the Crocheron Privy initially was thought to be located. The following table (identified as Table 1a) incorporates these issues. It should be noted that, as before, the possibility of encountering undocumented burials indicates that a bioarchaeologist should be on call during utility excavations in the vicinity of the former church cemeteries on Center Street and testing and monitoring adjacent to the Rezeau-Van Pelt burying ground. It should also be noted that these recommendations are subject to revision based on the findings of testing and subsequent construction. This pertains particularly to the extent of monitoring required.

Table 1a. RICHMOND TOWN UTILITIES Identified Archaeological Concerns (see Figure 4)

Block No.	MAP ID	Name/or Type of Structure/Feature	Dates	Proposed Infrastructure	Remarks and Recommendations
4441a & b (bordering Center St)	1,2,3	One-Acre Lot: (3) Historic Structures	1699-1755	Electric and water lines within and adjacent to the road bed	Center St between Arthur Kill Rd and Tysen Ct is the possible location of these resources. <b>Recommendation: Monitoring during excavations</b>
4441a	W	Prall House Foundation (possible)	1723 - ?	Sewer line	This site is speculative; <b>Recommendation: Test Trench prior to sewer construction</b>
4441a	GG	Formerly identified as the Crocheron Privy, now possibly an unidentified buried feature	??	Sewer line	<b>Testing prior to excavation.</b>
4441c	F	Ambrose G. Taylor House Foundation	1845 - c 1952	Electric line	Although relatively shallow, the proposed line should avoid impact to the resource. <b>Recommendation: Reroute electric</b>
4441c	S	Carriage Factory Foundation	1868 - 1938	Sewer line	Standing foundation. <b>Recommendation: Test Trench prior to construction/Avoidance if warranted</b>
4441d	F	Rezeau-Van Pelt Burying Ground	18 <sup>th</sup> C - present; active until c. 1865	Sewer line	A sewer line will run along the N side of the burial ground. Although fenced in 1850, the cemetery's early parameters are unknown. <b>Recommendation: Test Trench prior to excavation/Monitoring during excavation if warranted</b>
4437	A	Stephens-Prier House	1857-present	Sewer lines on the N side of the building	To confirm there is no archaeological issue, the NYCLPC has requested <b>monitoring during construction</b>

**THIS PAGE INTENTIONALLY LEFT BLANK**



THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

August 5, 2014

**ADDENDUM No. # 4**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:

1. **Please note that, for bidders who obtained drawings from the DDC website prior to and including 8/5/14, these drawings should be discarded in their entirety. An updated set of project drawings will be available on the website as of 8/6/14 and these drawings should be used instead.**

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.



---

David Resnick, R.A.  
Deputy Commissioner

\_\_\_\_\_  
Name of Bidder

By: \_\_\_\_\_





THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

September 5, 2014

**ADDENDUM No. # 5**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Museum Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:

**1. Questions from Bidders and Responses to Questions:**

See Attachment A.

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.



---

Dr. Feniosky Peña-Mora  
Commissioner

---

Name of Bidder

By: \_\_\_\_\_

**DDC PROJECT #: PVC341-M**

**PROJECT NAME: Historic Richmond Town Museum Utility Upgrades**

**ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES**

No.	Bidders Questions	DDC Responses
1	<p>Reference Drawing E-601.00 Electric one-line diagram. Wiring and Conduit Legend:            The following cables and conduits are not included in the pay bid items, 300 MCM, 500 MCM, 2/O 15KV cable, 2 ½" RGS conduit, 3 ½" RGS conduit, 5" RGS conduit and 5" FRE conduit. Please explain how we will be paid for this work.</p>	<p>Payment for furnishing and installing conduit and cable should be paid for as described in the project specifications. For example:</p> <p>Lump Sum items bid for Item number E-260020 "Electrical Utility Service Work" shall include the 5" RGS and FRE conduit; and the 500 MCM and 2/O 15KV cable. As stated, all work associated with the work to complete the service.</p> <p>Lump Sum items bid for "BUILDING ELECTRICAL WORK - XXXXXXX" shall include all the conduit and cable with-in the buildings, needed to complete the work for the stated building.</p>
2	<p>Drawings E-401.00, E-402.00, E-403.00 and E-405.00 are not to scale. Bidders would be unable to perform an accurate take-off conduits and cable runs from their start points to their destinations. Please provide more detailed information in order for us to provide a lump sum bid. Or would you adjust the item quantities to incorporate the interior conduit and cable and additional pay items for missing conduits and cables described in question No.1 above.</p>	<p>The building sizes can be measured from any site plans, which are to scale, and the electrical enlargement plans can be adjusted to measure conduit and cable runs within the buildings.</p>
3	<p>Drawing E-102.00 shows two (2) 5" RGS conduits from Con-Ed service pole to 1<sup>st</sup> DB-6 property line box, one (1) conduit with cable, one (1) conduit spare. From 1<sup>st</sup> DB-6 Box to 2<sup>nd</sup> DB-6 box shows two (2) 5" RGS conduits, one (1) conduit with cable, one (1) conduit spare. From 2<sup>nd</sup> DB-6 box shows four (4) 5" FRE conduits, one (1) with cable and three (3) conduits spare. Is this the intent of the Engineer or should this be corrected?</p>	<p>The (2) 5" conduits from first DB-6 box to the 2<sup>nd</sup> DB-6 box should be FRE not RGS as stated in the RFI. And the Bids should include the (4) 5" FRE conduit from the 2<sup>nd</sup> DB-6 box to the transformer.</p>
4	<p>Utility fixed sum pay items: Con-Ed specification section E-260020A is the 15Kv cable supplied and installed by Con-Ed? Time Warner specification E-260020TW does not specify cable to be furnished and installed. Please clarify is Time Warner doing the work or is another pay item required?</p>	<p>Yes, as part of the fixed sum item "Con Ed Specification Section E-260020 A" Con Ed is only furnishing and installing the 15 kV cable from the service pole to the first DB-6 property line box.</p> <p>The Time Warner allowance item includes furnishing and installing the cable.</p>

5	Reference Drawing E-001.00 Seaman's Cottage Building No. 24 Note 6 and 7: Who is the Sub Metering Vendor and are they supplying all equipment for a complete system and integration to the Hub?	The Contractor shall select the sub-metering equipment with a vendor's online software meeting the project specifications, which shall be approved by the engineer. The sub-metering is for internal use only, and there will be not outside vendor collection data for billing.												
6	Reference Drawing E-602.00: Telephone Riser Diagram Legend Item No. 2 and No. 3 items are ambiguous. Should No. 2 be removed since ten (10) 25 pair cables will not fit in one (1) 4" conduit.	On drawing E-602.00 Wiring / Conduit Legend, No. 2 can be removed; each cable shall be in its own 4' conduit, as stated in No. 3.												
7	Reference Drawing E-103.00: Electrical Panel L.P. states all 20 AMP single pole circuit breakers. However, the cables are #2, #4, and #6. These cables are too large to properly terminate in these circuit breakers.	Number 10 AWG cable should be connected to the 20 amp CBs and spliced to the larger cables as identified on the panel schedule (in a trough below the panel).												
8	Drawing E-104.00 Communication Site Plan shows six (6) 4" RGS conduit risers for Time Warner Cable and Verizon. These items are not made part of bid pay items. Please explain how we will be compensated for this work.	The price bid for the (6) 4" RGS Conduit Risers shall be paid for in L.F. under the bid item 4" PVC Conduit.												
9	Are permits related to this contract free of charge?	Permits for work outside of normal working hours will have an additional cost which may be obtained solely at the contractor's discretion.												
10	There aren't any OCMC stipulations attached to the contract document. Which kind of OCMC stipulations the contractor has to use to attach to the required permit?	The Contractor shall obtain NYCDOT stipulations where necessary. This work shall be paid for under item 6.70.												
11	<p>Reference Items:</p> <table border="0"> <tr> <td>4.11 ARW</td> <td>Retaining wall excavation</td> <td>500CY</td> </tr> <tr> <td>8.22 BR</td> <td>Brick wall restore</td> <td>5CY</td> </tr> <tr> <td>8.22 RS</td> <td>Rubble wall restore</td> <td>80 CY</td> </tr> <tr> <td>4.06</td> <td>Concrete class 40</td> <td>40CY</td> </tr> </table> <p>Comparing the excavation (500CY) with the restoration (142CY) there is a difference of 355CY. On the removal drawings, retaining wall excavation does not appear to be 500CY. Are those quantities correct?</p>	4.11 ARW	Retaining wall excavation	500CY	8.22 BR	Brick wall restore	5CY	8.22 RS	Rubble wall restore	80 CY	4.06	Concrete class 40	40CY	Item No. 4.11 ARW includes excavation of Rubble, Brick and Concrete retaining structures as well as adjacent earth removal. Restoration items include restoration of wall structures only. Earth backfill is included in item number 4.11 CA Fill, Place Measurement.
4.11 ARW	Retaining wall excavation	500CY												
8.22 BR	Brick wall restore	5CY												
8.22 RS	Rubble wall restore	80 CY												
4.06	Concrete class 40	40CY												
12	On the removal drawing it is indicated that the contractor will remove and restore wooden fence. There is not a pay item, how will this work be paid?	Removal and reinstallation of wooden fences as required for construction of utilities, etc. shall be included in the appropriate items for those utilities, etc. No direct payment.												
13	Between the new roads and the existing roads/streets, a concrete header will be constructed, as per detail 1-C002 on drwg C-002.00. There is not a pay item, how will this be paid?	Concrete headers shall be paid for under item 4.08 AA Concrete Curb.												

14	Item 6.02 AAN unclassified excavation 2,000CY. Will the estimated quantity have an overrun of more than 125%?	Bidder shall provide Unit Pricing based on quantity provided (2,000 CY).
15	On the electrical demolition plan (E-101.00), it specified that the contractor will remove and dispose all existing utilities wood poles. There is not a pay item, how will this work be paid?	The cost for Removing and Disposal of the existing wood utility poles should be included in the lump sum cost for item E-260020 "ELECTRICAL UTILITY SERVICE WORK, INCLUDING REMOVALS AND NEW FENCING".



THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

September 11, 2014

**ADDENDUM No. # 6**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Museum Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:

**1. Revised Bid Opening Date:**

The Bid Opening for the Contract described below scheduled for September 11<sup>th</sup>, 2014 at 2:00pm is rescheduled to September 16<sup>th</sup>, 2014 at 2:00pm.

Contract #1 – General Construction Work

**2. Revisions to the Bid Booklet:**

Delete page 21-23 and replace with 21-23R, included with this Addendum.

**3. Questions from Bidders and Responses to Questions:**

See Attachment A.


**4. Revisions to the Drawings:**

See Attachment B.

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.

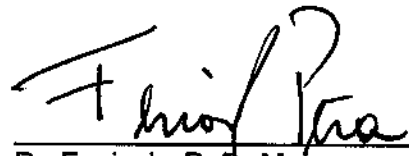  
\_\_\_\_\_  
Dr. Feniosky Peña-Mora  
Commissioner

\_\_\_\_\_  
Name of Bidder

By: \_\_\_\_\_

**DDC PROJECT #: PVC341-M**

**PROJECT NAME: Historic Richmond Town Museum Utility Upgrades**

**ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES**

No.	Bidders Questions	DDC Responses
1	If possible, kindly arrange another brief site-visit.	Potential bidders may access the site as the general public. No building access will be granted.
2	Please provide an extension of the bid due date.	A revised Bid Opening date will be Tuesday, September 16, 2014 @ 2:00PM.
3	Please confirm if dewatering price include the necessary treatment for biological contaminations (such as from the decomposed dead-bodies/bones/remains/etc.).	No, the dewatering price should not include treatment for biological contaminations. There is no known biological contamination.
4	Refer to Note #5 Bid Booklet Volume #1 - Page #2. Please clarify if bid price would include any Asbestos & Lead Abatement/ Removal. Also, will building #23, 24, & 1 require Asbestos & Lead Abatement/ Removal?	There is no asbestos and lead removal. Additionally, there is no bid price covering asbestos and lead removal. Should asbestos or lead removal be required, the work would be performed as an additional service, the cost of which will be negotiated at that time.
5	Please clarify if hazardous contaminated soil removal work will be included in the scope?"	There is no hazardous/ contaminated soil removal. Additionally, there is no bid price for hazardous/contaminated soil removal. Should such removals be required, the work would be performed as an additional service, the cost of which will be negotiated at that time.
6	What is the responsibility of the contractor as it pertains to the handling of existing underground utilities and how will we be paid for this work?	<p>Please refer to CET Specifications &amp; Sketches and Drawing G-002.00 Note 1.03, 9.01, 9.02, 9.03, &amp; 9.04 for handling of existing underground utilities.</p> <p>CET Specifications and Sketches are available for pick up at the Department of Design and Construction, Contract Section, 30-30 Thomson Avenue - First Floor, Long Island City, NY 11101.</p> <p>The contractor is responsible to coordinate with appropriate Utility Companies/Agencies regarding maintaining and protecting existing utilities. This work will be paid under revised Bid Schedule Item #178 - Protection and Support of Existing Underground Utilities (Included with this Addendum).</p>

**DDC PROJECT #: PVC341-M**

**PROJECT NAME: Historic Richmond Town Museum Utility Upgrades**

**ATTACHMENT B – REVISIONS TO THE DRAWINGS**

**REFER TO DRAWING G-002.00**

1. Delete note 9.02 and replace with:

"Con Edison, National Grid, Time Warner and Verizon/Empire City Subway facilities are located within the project limits. As a result of this project, the contractor will be required to protect and support some or all of their facilities. This work will be performed by the contractor in accordance with the CET Specifications and Sketches. The contractor is to coordinate activities with the utility companies/agencies."



05/19/2014  
4:00 PM

NEW YORK CITY DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

PROJECT ID: PVC 341-M  
CONTRACT PIN: 20040021583

**BID SCHEDULE FORM**

COL 1 SEQ. NO.	COL 2 ITEM NUMBER AND DESCRIPTION	COL 3 ENGINEER'S ESTIMATE QUANTITY	COL 4 UNIT	COL 5 ENTER PRICE (IN FIGURES) DOLLARS	COL 6 EXTENDED AMOUNT (IN FIGURES) DOLLARS	CTS
177	SL-37.05 C 36" X 36" POLYMER CONCRETE BOX AND COVER	28	EA			
178	CET Specifications & Sketches Protection and Support of Existing Underground Utilities	1	L.S.			

**SUB-TOTAL: \$** \_\_\_\_\_

179	6.39 A MOBILIZATION	1	L.S.			
<b>BID PRICE OF MOBILIZATION SHALL NOT EXCEED 4% OF THE ABOVE SUB-TOTAL PRICE.</b>						

**TOTAL BID PRICE: \$** \_\_\_\_\_

PLEASE BE SURE A LEGIBLE BID IS ENTERED FOR EACH ITEM.  
THE BIDDER SHALL INSERT THE TOTAL BID PRICE IN  
THE BID FORM ON PAGE 13 OF THIS BID BOOKLET.



THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS

September 5, 2014

**ADDENDUM No. # 5**

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

**PVC341-M**

**Historic Richmond Town Museum Utilities Upgrade**

---

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

---

The bidder is advised that the items listed below apply to the project:


**1. Questions from Bidders and Responses to Questions:**

See Attachment A.

---

**THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.**

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.

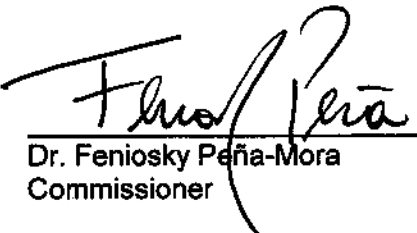  
\_\_\_\_\_  
Dr. Feniosky Peña-Mora  
Commissioner

\_\_\_\_\_  
Name of Bidder

By: \_\_\_\_\_

**DDC PROJECT #: PVC341-M**

**PROJECT NAME: Historic Richmond Town Museum Utility Upgrades**

**ATTACHMENT A - BIDDERS QUESTIONS AND DDC RESPONSES**

No.	Bidders Questions	DDC Responses
1	<p>Reference Drawing E-601.00 Electric one-line diagram. Wiring and Conduit Legend:            The following cables and conduits are not included in the pay bid items, 300 MCM, 500 MCM, 2/O 15KV cable, 2 ½" RGS conduit, 3 ½" RGS conduit, 5" RGS conduit and 5" FRE conduit. Please explain how we will be paid for this work.</p>	<p>Payment for furnishing and installing conduit and cable should be paid for as described in the project specifications. For example:</p> <p>Lump Sum items bid for Item number E-260020 "Electrical Utility Service Work" shall include the 5" RGS and FRE conduit; and the 500 MCM and 2/O 15kV cable. As stated, all work associated with the work to complete the service.</p> <p>Lump Sum items bid for "BUILDING ELECTRICAL WORK - XXXXXXX" shall include all the conduit and cable with-in the buildings, needed to complete the work for the stated building.</p>
2	<p>Drawings E-401.00, E-402.00, E-403.00 and E-405.00 are not to scale. Bidders would be unable to perform an accurate take-off conduits and cable runs from their start points to their destinations. Please provide more detailed information in order for us to provide a lump sum bid. Or would you adjust the item quantities to incorporate the interior conduit and cable and additional pay items for missing conduits and cables described in question No.1 above.</p>	<p>The building sizes can be measured from any site plans, which are to scale, and the electrical enlargement plans can be adjusted to measure conduit and cable runs within the buildings.</p>
3	<p>Drawing E-102.00 shows two (2) 5" RGS conduits from Con-Ed service pole to 1<sup>st</sup> DB-6 property line box, one (1) conduit with cable, one (1) conduit spare. From 1<sup>st</sup> DB-6 Box to 2<sup>nd</sup> DB-6 box shows two (2) 5" RGS conduits, one (1) conduit with cable, one (1) conduit spare. From 2<sup>nd</sup> DB-6 box shows four (4) 5" FRE conduits, one (1) with cable and three (3) conduits spare. Is this the intent of the Engineer or should this be corrected?</p>	<p>The (2) 5" conduits from first DB-6 box to the 2<sup>nd</sup> DB-6 box should be FRE not RGS as stated in the RFI. And the Bids should include the (4) 5" FRE conduit from the 2<sup>nd</sup> DB-6 box to the transformer.</p>
4	<p>Utility fixed sum pay items: Con-Ed specification section E-260020A is the 15Kv cable supplied and installed by Con-Ed? Time Warner specification E-260020TW does not specify cable to be furnished and installed. Please clarify is Time Warner doing the work or is another pay item required?</p>	<p>Yes, as part of the fixed sum item "Con Ed Specification Section E-260020 A" Con Ed is only furnishing and installing the 15 kV cable from the service pole to the first DB-6 property line box.</p> <p>The Time Warner allowance item includes furnishing and installing the cable.</p>

5	Reference Drawing E-001.00 Seaman's Cottage Building No. 24 Note 6 and 7: Who is the Sub Metering Vendor and are they supplying all equipment for a complete system and integration to the Hub?	The Contractor shall select the sub-metering equipment with a vendor's online software meeting the project specifications, which shall be approved by the engineer. The sub-metering is for internal use only, and there will be not outside vendor collection data for billing.												
6	Reference Drawing E-602.00: Telephone Riser Diagram Legend Item No. 2 and No. 3 items are ambiguous. Should No. 2 be removed since ten (10) 25 pair cables will not fit in one (1) 4" conduit.	On drawing E-602.00 Wiring / Conduit Legend, No. 2 can be removed; each cable shall be in its own 4' conduit, as stated in No. 3.												
7	Reference Drawing E-103.00: Electrical Panel L.P. states all 20 AMP single pole circuit breakers. However, the cables are #2, #4, and #6. These cables are too large to properly terminate in these circuit breakers.	Number 10 AWG cable should be connected to the 20 amp CBs and spliced to the larger cables as identified on the panel schedule (in a trough below the panel).												
8	Drawing E-104.00 Communication Site Plan shows six (6) 4" RGS conduit risers for Time Warner Cable and Verizon. These items are not made part of bid pay items. Please explain how we will be compensated for this work.	The price bid for the (6) 4" RGS Conduit Risers shall be paid for in L.F. under the bid item 4" PVC Conduit.												
9	Are permits related to this contract free of charge?	Permits for work outside of normal working hours will have an additional cost which may be obtained solely at the contractor's discretion.												
10	There aren't any OCMC stipulations attached to the contract document. Which kind of OCMC stipulations the contractor has to use to attach to the required permit?	The Contractor shall obtain NYCDOT stipulations where necessary. This work shall be paid for under item 6.70.												
11	<p>Reference Items:</p> <table border="0"> <tr> <td>4.11 ARW</td> <td>Retaining wall excavation</td> <td>500CY</td> </tr> <tr> <td>8.22 BR</td> <td>Brick wall restore</td> <td>5CY</td> </tr> <tr> <td>8.22 RS</td> <td>Rubble wall restore</td> <td>80 CY</td> </tr> <tr> <td>4.06</td> <td>Concrete class 40</td> <td>40CY</td> </tr> </table> <p>Comparing the excavation (500CY) with the restoration (142CY) there is a difference of 355CY. On the removal drawings, retaining wall excavation does not appear to be 500CY. Are those quantities correct?</p>	4.11 ARW	Retaining wall excavation	500CY	8.22 BR	Brick wall restore	5CY	8.22 RS	Rubble wall restore	80 CY	4.06	Concrete class 40	40CY	Item No. 4.11 ARW includes excavation of Rubble, Brick and Concrete retaining structures as well as adjacent earth removal. Restoration items include restoration of wall structures only. Earth backfill is included in item number 4.11 CA Fill, Place Measurement.
4.11 ARW	Retaining wall excavation	500CY												
8.22 BR	Brick wall restore	5CY												
8.22 RS	Rubble wall restore	80 CY												
4.06	Concrete class 40	40CY												
12	On the removal drawing It is indicated that the contractor will remove and restore wooden fence. There is not a pay item, how will this work be paid?	Removal and reinstallation of wooden fences as required for construction of utilities, etc. shall be included in the appropriate items for those utilities, etc. No direct payment.												
13	Between the new roads and the existing roads/streets, a concrete header will be constructed, as per detail 1-C002 on drwg C-002.00. There is not a pay item, how will this be paid?	Concrete headers shall be paid for under item 4.08 AA Concrete Curb.												

14	Item 6.02 AAN unclassified excavation 2,000CY. Will the estimated quantity have an overrun of more than 125%?	Bidder shall provide Unit Pricing based on quantity provided (2,000 CY).
15	On the electrical demolition plan (E-101.00), it specified that the contractor will remove and dispose all existing utilities wood poles. There is not a pay item, how will this work be paid?	The cost for Removing and Disposal of the existing wood utility poles should be included in the lump sum cost for item E-260020 "ELECTRICAL UTILITY SERVICE WORK, INCLUDING REMOVALS AND NEW FENCING".

FMS ID: PVC341-M



---

---

**THE CITY OF NEW YORK  
DEPARTMENT OF DESIGN AND CONSTRUCTION  
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE                      LONG ISLAND CITY, NEW YORK 11101-3045  
TELEPHONE (718) 391-1000                  WEBSITE [www.nyc.gov/buildnyc](http://www.nyc.gov/buildnyc)

---

---

**Contract for Furnishing all Labor and Material Necessary and Required for:**

**CONTRACT NO. 1                  GENERAL CONSTRUCTION WORK**

# **Historic Richmond Town Utilities Upgrade**

**LOCATION:                      441 Clarke Avenue  
BOROUGH:                    Staten Island 10306  
CITY OF NEW YORK**

---

Contractor \_\_\_\_\_

Dated \_\_\_\_\_, 20\_\_\_\_

---

Entered in the Comptroller's Office

First Assistant Bookkeeper \_\_\_\_\_

Dated \_\_\_\_\_, 20\_\_\_\_

