



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

PROJECT ID: PV467-STG

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

LAW

VOLUME 1 OF 3

BID BOOKLET

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR:

St. George Theater Stage Rigging Replacement

LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK

CONTRACT NO. 1 GENERAL CONSTRUCTION


Department of Cultural Affairs

Wallance + Hibbs Architects



Date: April 17, 2014

BA-114



Bid Tab

Description	ST. GEORGE THEATER STAGE RIGGING REPLACEMENT - BOROUGH OF STATEN ISLAND		
Bid Date	7/9/2014	FMS ID	PV467-STG
Estimated Cost	\$1,625,066.00	Client Agency	Dept. of Cultural Affairs
Bid Security	Not less than 2% of Total Bid Price	PLA	No
Time Allowed	300 CCD	Contract Manager	Phyllis Lopez
Addendum	3	Project Manager	Rodriguez Marquez, Fe
PIN	8502014PV0014C	E-PIN	85014B0147001
Selective Bidding	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Consultant	Wallace + Hibbs Architects

Bid Rank	Vendor	Bid Amount	Security Type
1	CASTLESTONE CONSTRUCTION CORP.	\$1,301,248.00	Bond
2	AFL CONSTRUCTION CO., INC.	\$1,375,561.00	Bond
3	XBR INC	\$1,726,000.00	Bond
4	N.S.P. ENTERPRISES INC.	\$2,143,000.00	Bond
5	NEELAM CONSTRUCTION CORP.	\$2,175,094.00	Bond
6	LANMARK GROUP, INC.	\$2,351,373.00	Bond
7	P & K CONTRACTING, INC.	\$2,541,000.00	Bond
8	NATIONAL ENVIRONMENTAL SAFETY COMPANY CORP. INC.	\$3,145,995.00	Bond

SUBCONTRACTORS:

HVAC: Latty General	\$85,000.00
Electrical: Core Electric	\$67,126.00

Recorder: Melanie Sanchez ext. 3430


Approver:

Doraine Holley

Bid Tab

Page 1 of 1

Pin: 8502014PV0014C





NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

DR. FENIOSKY A. PEÑA-MORA
Commissioner

JOHN GODDARD
Agency Chief
Contracting Officer

September 25, 2014

CERTIFIED MAIL - RETURN RECEIPT REQUEST

CASTLESTONE CONSTRUCTION CORP.

36-20 13th Street
Long Island City, NY 11106

RE: FMS ID: PV467-STG
E-PIN: 85014B0147001
DDC PIN: 8502014PV0014C
ST. GEORGE THEATER STAGE RIGGING
REPLACEMENT - BOROUGH OF STATEN
ISLAND
NOTICE OF AWARD

Dear Contractor:

You are hereby awarded the above referenced contract based upon your bid in the amount of \$1,301,248.00 submitted at the bid opening on July 09, 2014. Within ten (10) days of your receipt of this notice of award, you are required to take the actions set forth in Paragraphs (1) through (3) below. For your convenience, attached please find a copy of Schedule A of the General Conditions to the Contract, which sets forth the types and amounts of insurance coverage required for this contract.

- (1) Execute four copies of the Agreement in the Contracts Unit, 30-30 Thomson Avenue, 1st Floor, Long Island City, New York (IDCNY Building). A Commissioner of Deeds will be available to witness and notarize your signature. The Agreement must be signed by an officer of the corporation or a partner of the firm.
- (2) Submit to the Contracts Unit four properly executed performance and payment bonds. If required for this contract, copies of performance and payment bonds are attached.
- (3) Submit to the Contracts Unit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by New York State Law. The insurance documentation specified in this paragraph is required for registration of the contract with the Comptroller's Office.





On or before the contract commencement date, you are required to submit all other certificates of insurance and/or policies in the types and amounts required by Schedule A. Such certificates of Insurance and/or policies must be submitted to the Agency Chief Contracting Office, Attention: Risk Manager, Fourth Floor at the above indicated department address.

Your attention is directed to the section of the Information for Bidders entitled "Failure to Execute Contract". As indicated in this section, in the event you fail to execute the contract and furnish the required bonds within the (10) days of your receipt of this notice of award, your bid security will be retained by the City and you will be liable for the difference between your bid price and the price for which the contract is subsequently awarded, less the amount of the bid security retained.

Sincerely,


John Goddard



Qualification Form

Project ID: PV467-STG

List previous projects completed to meet the special experience requirements for this contract. Please photocopy this form for submission of all required projects.

Name of Contractor: MEH CONSTRUCTION

Name of Project: TILDEN HOUSES

Location of Project: TILDEN HOUSES WORTH ST.

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: George Harididi

Title: Resident Phone Number: 516-780-6946

Brief description of work completed: Replace steel stairs, Masonry repair.

Was the work performed as a prime or a subcontractor: SUB

Amount of Contract: 1.2 mil

Date of Completion: 11/11

Name of Contractor: _____

Name of Project: _____

Location of Project: _____

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: _____

Title: _____ Phone Number: _____

Brief description of work completed: _____

Was the work performed as a prime or a subcontractor: _____

Amount of Contract: _____

Date of Completion: _____

THIS PAGE INTENTIONALLY LEFT BLANK

**BID FORM
THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

**BID FOR FURNISHING ALL LABOR AND
MATERIAL NECESSARY AND REQUIRED FOR:**

PROJECT ID: PV467-STG

**St. George Theater Stage Rigging Replacement
35 Hyatt Street
Staten Island 10301**

Name of Bidder: Castlestone Construction Corp

Date of Bid Opening: 7/2/14

Bidder is: (Check one, whichever applies) Individual () Partnership () Corporation ()

Place of Business of Bidder: 36-20 13th St LIC NY 11106

Bidder's Telephone Number: 718-472-5678 Bidder's Fax Number: 718-472-5683

Bidder's Email Address: Info@castlestonecorp.com

Residence of Bidder (If Individual): _____

If Bidder is a Partnership, fill in the following blanks:

Names of Partners

Residence of Partners

If Bidder is a Corporation, fill in the following blanks:

Organized under the laws of the State of NY

Name and Home Address of President: Abdul L. Munawar
6901 7th Ave Brooklyn, NY 11228

Name and Home Address of Secretary: Naureen N. Munawar
6901 7th Ave Brooklyn, NY 11228

Name and Home Address of Treasurer: Naureen N. Munawar, 6901 7th Ave Brooklyn, NY 11228

THIS PAGE INTENTIONALLY LEFT BLANK

BID FORM

The above-named Bidder affirms and declares:

1. The said bidder is of lawful age and the only one interested in this bid; and no person, firm or corporation other than hereinbefore named has any interest in this bid, or in the Contract proposed to be taken.
2. By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief: (1) the prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or with any competitor; (2) unless otherwise required by law, the prices quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor; and (3) no attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.
3. No councilman or other officer or employee or person whose salary is payable in whole or in part from the City Treasury is directly or indirectly interested in this bid, or in the supplies, materials, equipment, work or labor to which it relates, or in any of the profits thereof.
4. The bidder is not in arrears to the City of New York upon debt or contract or taxes, and is not a defaulter, as surety or otherwise, upon any obligation of the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York or State of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except as set forth on the Affirmation included as page 17 of this Bid Booklet.

The bidder hereby affirms that is has paid all applicable City income, excise and other taxes for all years it has conducted business activities in New York City.

5. The bidder, as an individual, or as a member, partner, director or officer of the bidder, if the same be a firm, partnership or corporation, executes this document expressly warranting and representing that should this bid be accepted by the City and the Contract awarded to him, he and his subcontractors engaged in the performance:
(1) will comply with the provisions of Section 6-108 of the Administrative Code of the City of New York and the non-discrimination provisions of Section 220a of the New York State Labor Law, as more expressly and in detail set forth in the Agreement; (2) will comply with Section 6-109 of the Administrative Code of the City of New York in relation to minimum wages and other stipulations as more expressly and in detail set forth in the Agreement; (3) have complied with the provisions of the aforesaid laws since their respective effective dates, and (4) will post notices to be furnished by the City, setting forth the requirements of the aforesaid laws in prominent and conspicuous places in each and every plant, factory, building and structure where employees engaged in the performance of the Contract can readily view it, and will continue to keep such notices posted until the supplies, materials and equipment, or work labor and services required to be furnished or rendered by the Contractor have been finally accepted by the City. In the event of any breach or violation of the foregoing, the Contractor may be subject to damages, liquidated or otherwise, cancellation of the Contract and suspension as a bidder for a period of three years. (The words, "the bidder", "he", "his", and "him" where used shall mean the individual bidder, firm, partnership or corporation executing this bid).

6. Compliance Report

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, (1) represents that his attention has been specifically drawn to Executive Order No. 50, dated April 25, 1980, on Equal Employment Compliance of the contract, and (2) warrants that he will comply with the provisions of Executive Order No. 50. The Employment Report must be submitted as part of the bid.

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, executes this document expressly warranting that he will comply with: (1) the provision of the contract on providing records, Chapter 8.

7. By submission of this bid, the bidder certifies that it now has and will continue to have the financial capability to fully perform the work required for this contract. Any award of this contract will be made in reliance upon such certification. Upon request therefor, the bidder will submit written verification of such financial capability in a form that is acceptable to the department.

8. In accordance with Section 165 of the State Finance Law, the bidder agrees that tropical hardwoods, as defined in Section 165 of the State Finance Law, shall not be utilized in the performance of this Contract, except as the same are permitted by the foregoing provision of law.

9. The bidder has visited and examined the site of the work and has carefully examined the Contract in the form approved by the Corporation Counsel, and will execute the Contract and perform all its items, covenants and conditions, and will provide, furnish and deliver all the work, materials, supplies, tools and appliances for all labor and materials necessary or required for the hereinafter named work, all in strict conformity with the Contract, for the prices set forth in the Bid Schedule:

Section V: Vendor Certification and Required Affirmations:

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth in this Contract and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of the M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or If a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

PROJECT ID: PV467-STG

TOTAL BID PRICE: In the space provided below, the Bidder shall indicate the total bid price in figures.

- A. LUMP SUM PRICE - Total price for all labor and material for all required work, excluding item (B) set forth below. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

Total Price For Labor

Total Price for Material Sold and Delivered

\$ 774,740⁸⁰ +

\$ 514,449⁷⁰

Total Price for Item A = \$ 1,286,248

(B) 7/9/14

- B. ALLOWANCE for Incidental Asbestos Abatement (Section 028013 of the Specifications)

\$15,000.00

TOTAL BID PRICE (Add A + B)
(a/k/a BID PROPOSAL)

\$1,301,248

BIDDER'S SIGNATURE AND AFFIDAVIT

* **SUBCONTRACTOR IDENTIFICATION:** You MUST complete and submit the form entitled "Bidder's Identification of Subcontractors" (page 19) at the time you submit your bid. You must submit this form in a separate, sealed envelope (BID ENVELOPE #2). In the event an award of contract is not made to the Bidder, the Bidder hereby authorizes the Agency to shred the form entitled "Bidder's Identification of Subcontractors". Yes No

Bidder: Castlestone Construction Corp

By: Shedul L. Munnawan

(Signature of Partner or corporate officer)

Nawzen Munnawan

Attest:
(Corporate Seal)

Secretary of Corporate Bidder

Affidavit on the following page should be subscribed and sworn to before a Notary Public

THIS PAGE INTENTIONALLY LEFT BLANK

BID FORM (TO BE NOTARIZED)

AFFIDAVIT WHERE BIDDERS IS AN INDIVIDUAL

STATE OF NEW YORK, COUNTY OF _____ ss:
_____ being duly sworn says:
I am the person described in and who executed the foregoing bid, and the several matters therein stated are in all respects true.

(Signature of the person who signed the Bid)

Subscribed and sworn to before me this
day of _____

Notary Public

AFFIDAVIT WHERE BIDDERS IS A PARTNERSHIP

STATE OF NEW YORK, COUNTY OF _____ ss:
_____ being duly sworn says:
I am a member of _____ the firm described in and which executed the foregoing bid.
subscribed the name of the firm thereto on behalf of the firm, and the several matters therein stated are in all respects true.

(Signature of Partner who signed the Bid)

Subscribed and sworn to before me this
day of _____

Notary Public

AFFIDAVIT WHERE BIDDERS IS A CORPORATION

STATE OF NEW YORK, COUNTY OF Queens ss:
Abdul L. Munawar being duly sworn says:
I am the President of the above named corporation whose name is subscribed to and which executed
the foregoing bid. I reside at 6901 7th Ave Bklyn NY 11228
I have knowledge of the several matters therein stated, and they are in all respects true.

Abdul L. Munawar
(Signature of Corporate Officer who signed the Bid)

Subscribed and sworn to before me this
8th day of July, 2014

Stefanos Vitentia
Notary Public

STEFANOPOULOS VITENTIA
NOTARY PUBLIC, STATE OF NEW YORK
Registration No. 01ST6099670
Qualified in Queens County
Commission Expires 10/06/2015

AFFIRMATION

The undersigned bidder affirms and declares that said bidder is not in arrears to the City of New York upon debt, contract or taxes and is not a defaulter, as surety or otherwise, upon obligation to the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except

None

(If none, the bidder shall insert the word "None" in the space provided above.)

Full Name of Bidder: Castlestone Construction Corp
Address: 36-20 13th St
City: LIC State: NY Zip Code: 11106

CHECK ONE BOX AND INCLUDE APPROPRIATE NUMBER:

- A - Individual or Sole Proprietorship *
SOCIAL SECURITY NUMBER

- B - Partnership, Joint Venture or other unincorporated organization
EMPLOYER IDENTIFICATION NUMBER

- C - Corporation
EMPLOYER IDENTIFICATION NUMBER
20-0455782

By: Shekhar L. Munnawar
Signature:

Title: President

If a corporation, place seal here

This affirmation must be signed by an officer or duly authorized representative.

* Under the Federal Privacy Act the furnishing of Social Security Numbers by bidders on City contracts is voluntary. Failure to provide a Social Security Number will not result in a bidder's disqualification. Social Security Numbers will be used to identify bidders, proposers or vendors to ensure their compliance with laws, to assist the City in enforcement of laws, as well as to provide the City a means of identifying of businesses which seek City contracts.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
Location: 35 Hyatt Street, Staten Island NY 10301
Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Client Agency: DCA
Project ID: PV467-STG

DIVISION 1 - GENERAL REQUIREMENTS										
GENERAL REQUIREMENTS										
Temporary Facilities and Controls										
	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT			
1										
2	300	SF	6.50	1950	8.50	2550	4500			
3	3000	SF	2.50	7500	3.50	10500	18000			
4	1	LS	4725	4725	11225	11225	15750			
5	1	LS	1500	1500	3500	3500	5000			
6	1	LS	3000	3000	7000	7000	10000			
	1	LS	1050	1050	2450	2450	3500			
SUB-TOTAL										
56750										
DIVISION 2 - EXISTING CONDITIONS										
DEMOLITION AND STRUCTURE MOVING										
Selective Demolition and Alteration work										
1	35	EA	0	0	250	250	8750			
2	1	LS	3270	3270	2100	2100	3400			
3	1	LS	2000	2000	8000	8000	10000			
4		SF								
5		SF								
6	20	EA	30	1800	250	5000	6800			
SUB-TOTAL										
26150										
DIVISION 4 - MASONRY										
MASONRY										
Masonry Restoration										
1	20	EA	460	13150	700	1050	45000			
SUB-TOTAL										
45000										





NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
Location: 35 Hyatt Street, Staten Island NY 10301
Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK


Client Agency DCA
Project ID: PV467-STG

DIVISION 5 - METALS

5	050000	051200	METALS	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
			Structural Steel							
		1	<i>Re-inforce Rigging Grid Platform</i> Furnish and install HSS6x2x3/8 x ~10'-2" long, typical 4 locations	1	TON	1500	1500	3500	3500	9000
		2	Furnish and install hangers and channel at slots; 1/2" x 6" plate (4) part of V hanger, 2 conventional); C8x11.5; 3-slots, HSS6x2x3/8x10" and connection typical 6 locations		TON					16000
		3	Furnish and install hangers and channel at slots; 1/2" x 6" plate; C8x11.5; 3-slots		TON					18,500
		4	Furnish and install grid sub-frame; C7x9.8		TON					23,300
		5	Furnish and install grid channel (C3 x 4.1 pcs.)		TON					5,132
		6	Miscellaneous steel flanges, angles, brackets		LS					5,777
			<i>Stair Framing</i>							
		1	W8x15; W16x26 beams		TON					19,000
		2	MC8x22.8; C8x11.5		TON					15,000
		3	3"x3"x1/2" Angle		TON					10,000
			<i>Head Block and Loading Gallery</i>							
		1	Furnish and install Gallery Frame; HSS 20x12x1/2		TON					
		2	Furnish and install head block frame; HSS 6x3x3/8 typical 5 locations		TON					
		3	Furnish and install WT4x24 reinforcement to existing headblock		TON					
		4	Furnish and install back-to-back L3x3x3/8" hangers, (2) locations		TON					10,000
		5	Furnish and install Beam; W8x15		TON					10,000
		6	1/4" steel guard plate		TON					10,000
		7	5/16" Thick diamond steel plate		TON					5,000
		8	Furnish and install Channel; C8x11.5		TON					10,000
		9	Miscellaneous steel flanges, angles, brackets		LS					10,000
			<i>Re-inforce Roof Structure</i>							
		1	Furnish and install structural steel at roof reinforcing (W12x96, (3) W10x30)		TON					
		2	Miscellaneous steel plates, gussets, flanges, angles, brackets	1	LS					12,000







NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

Client Agency: DCA
 Project ID: PV467-STG

	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
1	1	LS	4200	4200	9600	9600	14,000
Fixed ladder with 1/4" Diamond plate treads and landing; side railings; Matte black finish							
2	1	LS	9000	9000	21000	21000	30,000
Fixed ladder@ Loading Gallery; mounted vertically							
3	200	LF	30	6000	70	14000	24,000
Metal Railings 1 1/2" Sch. 40 steel guardrail							
4	160	SF	41.25	6600	13400	13400	24,000
Wire mesh@ Guardrail; 0.12 Galvanized woven steel in continuous steel angle frame							
SUB-TOTAL							86,000

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
7	DIVISION 7 - THERMAL AND MOISTURE PROTECTION						
078000	FIRE AND SMOKE PROTECTION						
078123	Intumescent Fireproofing						
1	250	SF					
Intumescent Fireproofing@ new steelwork							
2	25	EA	50	1750	250	8750	19,500
Intumescent Fireproofing; Scrape and paint beam ends, connections and bearing plates							
3	35	EA	50	1750	250	8750	19,500
Intumescent Fireproofing; Scrape and paint beam ends, connections and truss chord							
4	1	LS	300	300	1200	1200	1500
Intumescent Fireproofing@ existing steel; areas disturbed; allowance							
SUB-TOTAL							27,500

DIVISION 9 - FINISHES

	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
9	DIVISION 9 - FINISHES						
099000	PAINTING AND FINISHING						
099000	Painting						
1	1	LS	1500	1500	2000	7000	7500
Paint@Head Block and Loading Gallery							
2	1	LS	1200	1200	3500	5200	5000
Paint@ New Stair, Rail and Frame							
3	200	SF	6.50	375	750	1875	2250
Paint@ New Grid Framing							
4	500	SF	1.50	750	750	4125	4950
Paint@ Existing Grid Framing							
5	1	LS	768	768	3072	3072	3040
Touch-up with corrosion prohibitive paint							







NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

Client Agency DCA
 Project ID: PV467-STG

260000	ELECTRIC POWER				QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
260500	Common Work Results for Electrical										
1	Common Work Results for Electrical - included with 260524										
260510	Basic Electrical Materials and Methods										
1	Basic Electrical Materials and Methods - included with 260524										
260524	Feeders and Branch Circuitry										
1	3/4" Emt, 2#10, #12G										
2	3/4" Emt, 3#10, #12G										
260526	Grounding and Bonding for Electrical Systems										
1	Grounding and Bonding for ES - included with 262726										
260533	Raceways and Boxes for Electrical Systems										
1	Raceways and Boxes for ES- included with 262726										
260553	Identification for Electrical Systems										
1	Identification for Electrical Systems - included with 262726										
260923	Lighting Control Devices										
1	Lighting Control devices - included with 262726										
262726	Wiring Devices										
1	Duplex receptacle										
2	Light switch										
3	Circuit Breakers; 1P-20A										
265100	Interior Lighting										
1	Flourescent Light Fixture; ceiling mount; Cooper lighting										
2	Flourescent Light Fixture; wall mount; Columbia lighting										
3	Wall mounted utility light fixture										
4	Index light;										
SUB-TOTAL											67126
TOTAL CONTRACT 1 - GENERAL CONSTRUCTION											1,284,248



BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

Project ID: PV467-STG

SUBMISSION: In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

1. **HVAC CONTRACTOR:**

LARRY GENERAL
(Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ 85,000

2. **ELECTRICAL CONTRACTOR:**

Core Electric
(Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ 67,126

BIDDER'S SIGNATURE: The Bidder must sign this form in the space provided below:

Name of Bidder: Castlestone Construction Corp

By: Abdul L. Munawar
Signature of Partner or Corporate Officer

Print Name: Abdul L. Munawar

Title: President



BID BOND 1
FORM OF BID BOND

KNOW ALL MEN BY THESE PRESENTS. That we,
Castlestone Construction Corp.

36-20 13th Street, Long Island City, NY 11106

hereinafter referred to as the "Principal", and

Bankers Insurance Company

11101 Roosevelt Blvd N., St. Petersburg, FL 33716

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of _____

Ten Percent of Total Amount Bid

(\$ --- 10% ---), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for _____

Contract #PV467-STG - St. George Theatre - Stage Rigging Replacement

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.



BID BOND 2

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to him the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the 9th day of July, 2014.

(Seal)

Castlestone Construction Corp.

(L.S.)

Principal

By: *Abdul L. Munnawar*

(Seal)

Bankers Insurance Company


Surety

By: *Scott M. Adams*
Scott M. Adams, Attorney-in-Fact



ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Queens ss:
On this 8th day of July, 2014, before me personally came Abdul L. Munawar to me known, who, being by me duly sworn, did depose and say that he resides at 690 17th Ave Brooklyn NY 11228 that he is the President of Castlestone Const. Corp. the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.



Stefaniopoulos Vitentia
Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:
On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument, and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:
On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be the person described in and who executed the foregoing instrument and acknowledged that he executed the same.

Notary Public

AFFIX ACKNOWLEDGEMENTS AND JUSTIFICATION OF SURETIES

THIS PAGE INTENTIONALLY LEFT BLANK

BANKERS INSURANCE COMPANY

STATE OF NEW JERSEY

COUNTY OF SUSSEX

On this 9th day of July, 2014, before me, a Notary Public within and for said County and State, personally appeared **Scott M. Adams** to me personally known, who being duly sworn, upon oath, did say that he is the **Attorney-in-fact** of and for the **Bankers Insurance Company**, a corporation created, organized and existing under and by the virtue of the laws of the **State of Florida** that the Corporate seal affixed to the foregoing instrument is the seal of said Corporation; that the seal was affixed; and the said **Scott M. Adams** did acknowledge that he executed the said instrument as the free act and deed of said Corporation.



Francine Befano

Notary Public of New Jersey

ID #2395145

My Commission Expires April 13, 2015



Power of Attorney

3225129

Bankers Insurance Company

KNOW ALL MEN BY THESE PRESENTS, that **BANKERS INSURANCE COMPANY**, a corporation duly organized under the laws of the State of Florida, and having its principal office in the City of St. Petersburg, Pinellas County, Florida, does hereby nominate, constitute and appoint:

* Scott M. Adams *

of the City of Cedar Knolls , Morris County, State of New Jersey , its true and lawful Attorney-in-fact, with full power and authority hereby conferred upon him/her to make, execute, seal and deliver for and on its behalf, as Surety, as its act and deed, any and all bonds, undertakings consent or Agreement not exceeding the sum of Three Million and xx/100 Dollars----- \$3,000,000.00 which this Company may be authorized to write.

This Power of Attorney is granted and is signed and sealed under and by the authority of the following resolutions adopted by the Board of Directors of Bankers Insurance Company, and now in force to-wit:

BE IT RESOLVED, that the Chairman of the Board, President and any Vice President of the Corporation are hereby authorized to execute Powers of Attorney, qualifying the Attorney(s)-in-Fact named in the Powers of Attorney to execute, on behalf of the Corporation, bonds, undertakings and contracts of suretyship; and that the Secretary or any Assistant Secretary of the Corporation are hereby authorized to attest the execution of any such Power of Attorney.

BE IT FURTHER RESOLVED, that the signatures of such officers may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, any and such Power of Attorney or certificate bearing such facsimile signatures shall be valid and binding upon the corporation when so affixed in the future with respect to any bond, undertaking or contract of suretyship to which it is attached.

IN WITNESS WHEREOF, Bankers Insurance Company has caused these presents to be executed by their duly authorized officers as of this 4th day of April, 2013.

ATTEST:

Ian Barber

Ian Barber, Assistant Secretary

BANKERS INSURANCE COMPANY


By: Wilbur L. Martin IV

Wilbur L. Martin IV, President

STATE OF FLORIDA)
COUNTY OF PINELLAS)

The foregoing instrument was acknowledged before me 4th day of April, 2013 by Wilbur L. Martin IV and Ian Barber, as President and Assistant Secretary, respectively, of Bankers Insurance Company, a Florida corporation, on behalf of the corporation.

Personally known OR Produced Identification - Type of Identification Provided _____



(SEAL)

Janet M. Bell

(NOTARY PUBLIC)

I, the undersigned, Assistant Secretary of Bankers Insurance Company do hereby certify that the original Power of Attorney, of which the foregoing is a full, true and correct copy, is in full force and effect.


IN WITNESS WHEREOF, I have hereunto subscribed my name as Assistant Secretary, and affix the corporate seal of the Corporation this

9th day of July, 2014

(SEAL)

Ian Barber

Ian Barber, Assistant Secretary

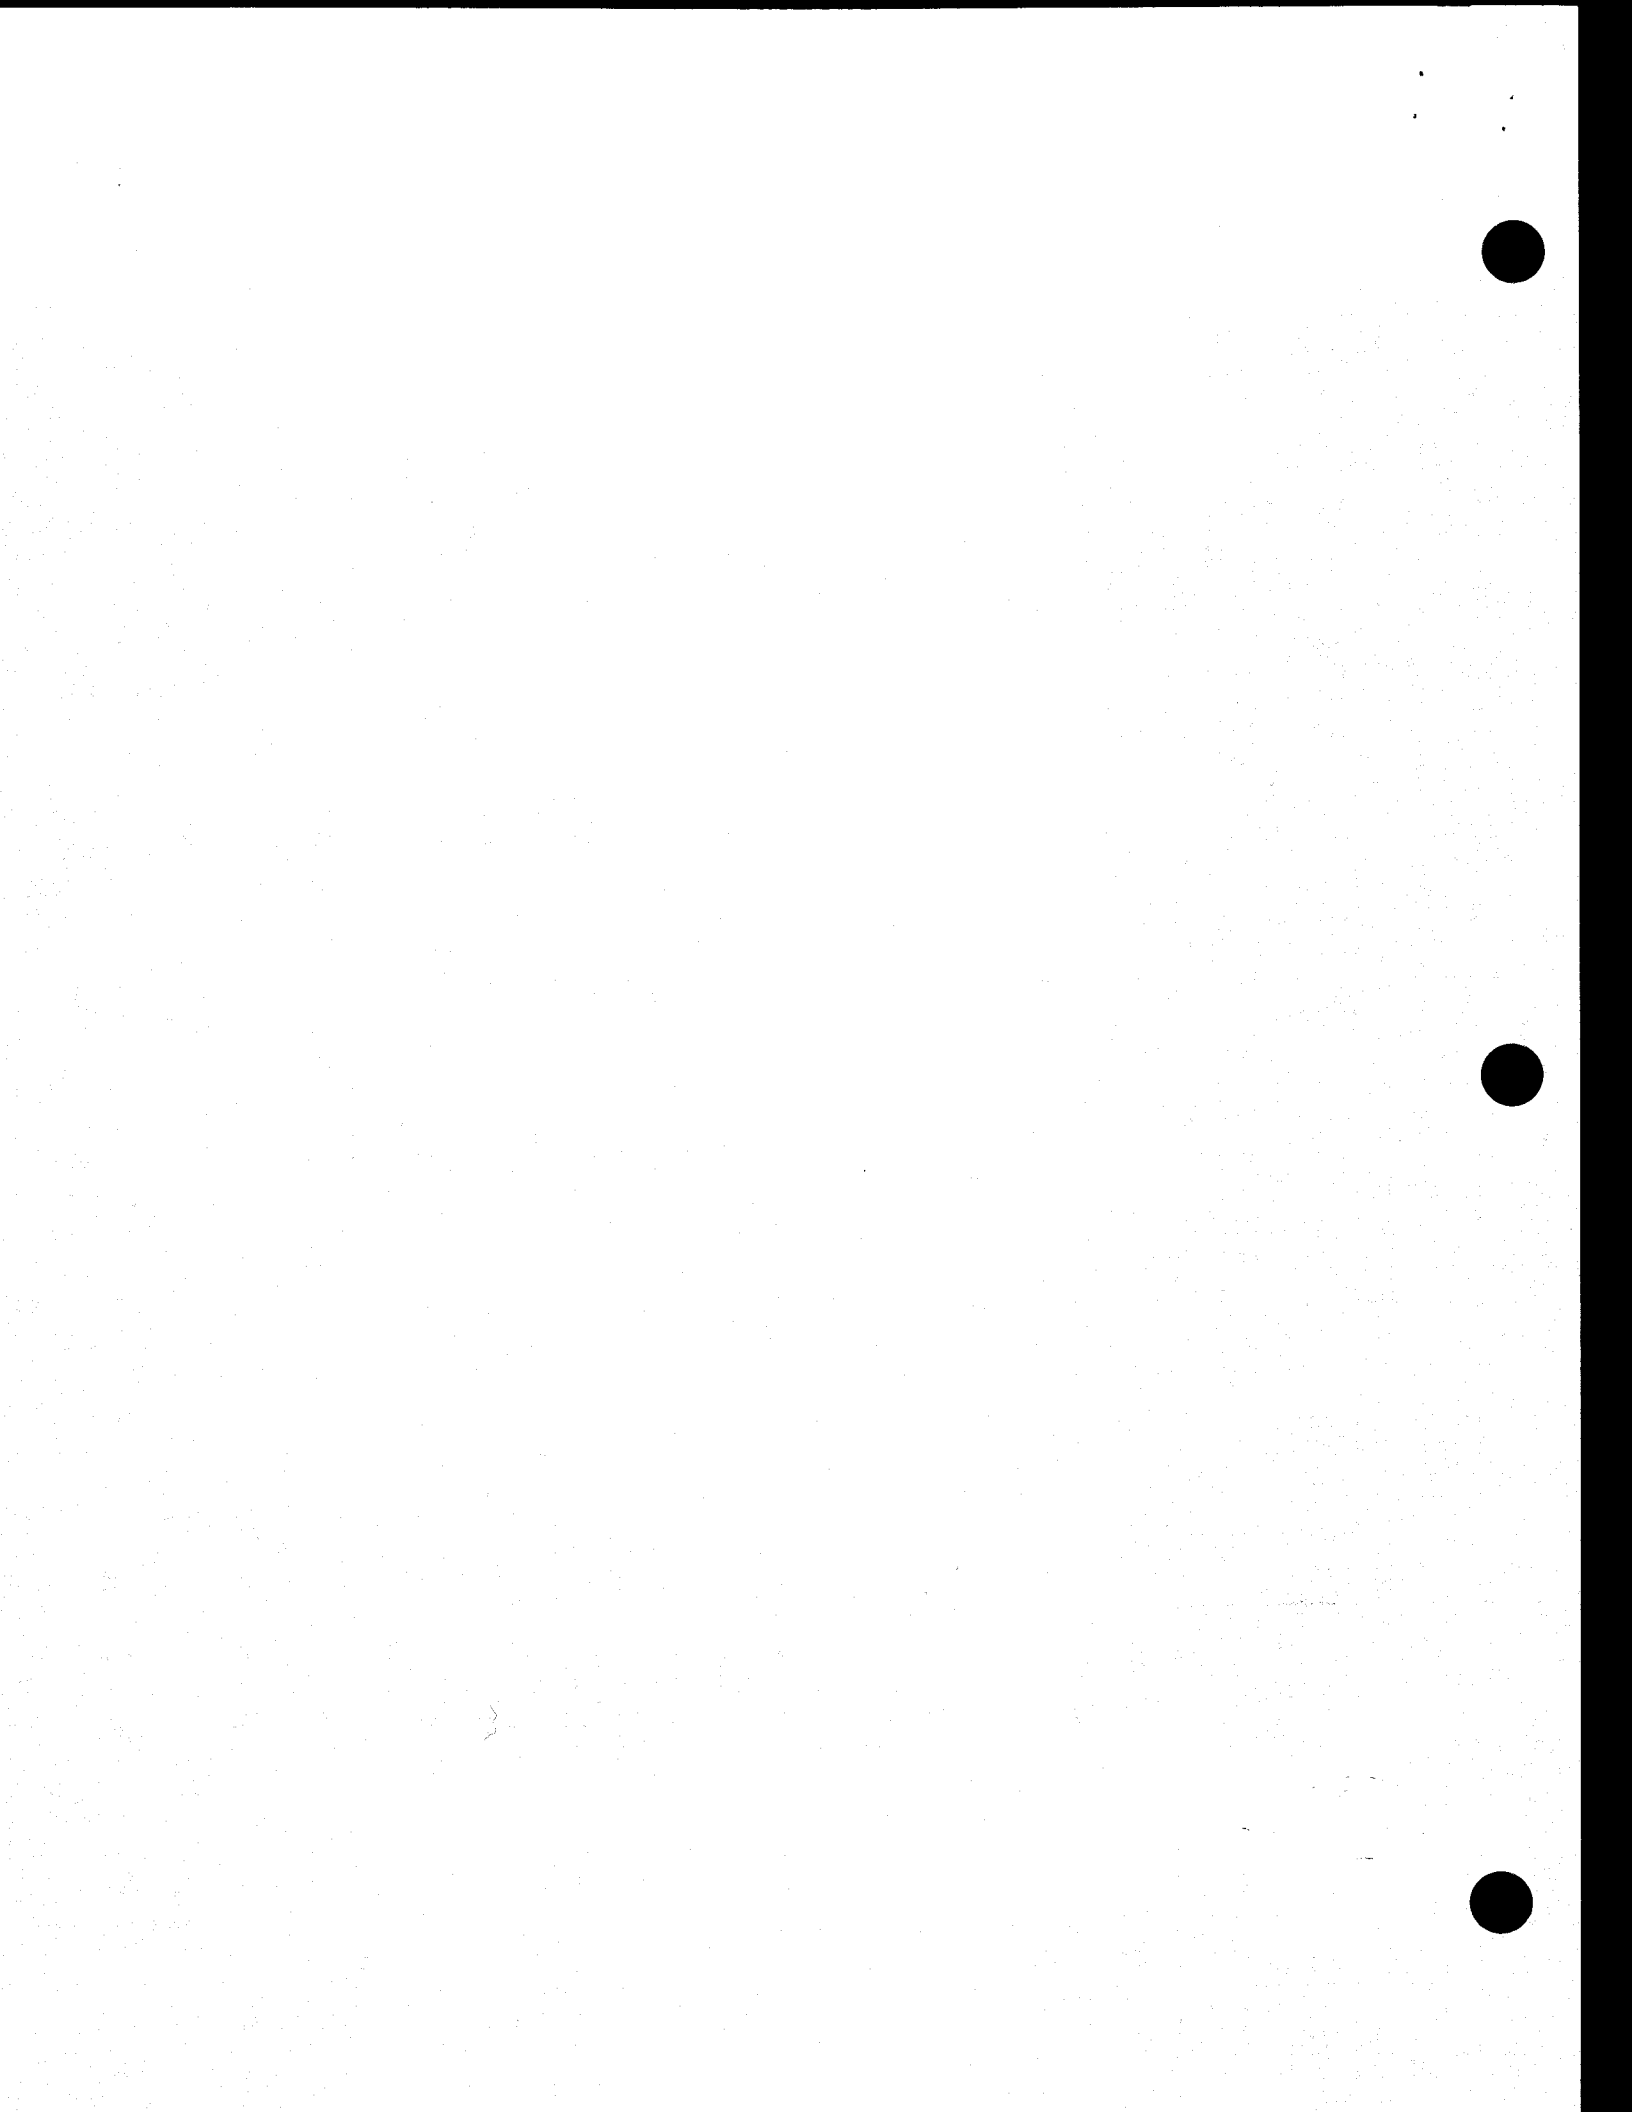

BANKERS INSURANCE COMPANY
11101 Roosevelt Blvd N, St. Petersburg Florida 33716
STATEMENT OF ASSETS, LIABILITIES, AND SURPLUS
at December 31, 2013


ASSETS	
Cash and Cash Equivalents	15,579,024
Debt Securities at Market Value	29,236,700
Mortgages and Notes Receivable	373,058
Equity Securities at Market Value	57,950,765
Other Invested Assets	3,503,346
Certificates of Deposit	8,884,274
Cash Held in Trust	
Accrued Investment Income	233,104
Premiums and Accounts Receivable	9,060,802
Amounts Held for Ceding Reinsurance	14,390,269
Reinsurance Loss Recoverable	367,488
Income Taxes Receivable-Current	2,593,507
Prepaid Reinsurance Premiums	
Income Taxes Receivable-Deferred	3,678,286
Equity in Underwriting Associations	26,249
Deferred Acquisition Costs	
Property/Equipment Net Depreciation	1,077,189
Intangible Assets	
Other Non-Current Assets	881,097
Accounts Receivable Affiliated	205,785
TOTAL ASSETS	148,040,944
Reserve for Losses and ALAE	47,743,604
Unearned Premium Reserves	31,815,860
Amounts Held/Due Reinsurers	2,213,765
Accrued Expenses/Other Liabilities	6,887,897
Accounts Payable	
Income Taxes Payable-Current	72,160
Accounts Payable Affiliated	396,607
TOTAL LIABILITIES	89,129,893
Common Stock	4,500,000
Additional Paid in Capital	40,205,898
Contributed Capital/Surplus Notes	5,000,000
Unassigned Funds (Surplus)	9,205,153
TOTAL POLICYHOLDERS' SURPLUS	58,911,051
TOTAL LIABILITIES AND POLICYHOLDERS' SURPLUS	148,040,944

I, Wilbur L. Martin IV, President of BANKERS INSURANCE COMPANY, certify that the foregoing is a fair statement of Assets, Liabilities, Surplus and Other Funds of this Company, at the close of business, December 31, 2013, as reflected by its books and records and as reported in its statement on file with the Insurance Department of the State of Florida.

IN TESTIMONY WHEREOF, I have set my hand and affixed the seal of the Company,
this 20th day of March, 2014.

BANKERS INSURANCE COMPANY





State of New York

DEPARTMENT OF FINANCIAL SERVICES

WHEREAS IT APPEARS THAT

Bankers Insurance Company


Home Office Address St. Petersburg, Florida

Organized under the Laws of Florida

has complied with the necessary requirements of or pursuant to law, it is hereby

licensed to do within this State the business of

accident and health, fire, miscellaneous property, water damage, burglary and theft, glass, elevator, collision, personal injury liability, property damage liability, workers' compensation and employers' liability, fidelity and surety, credit, motor vehicle and aircraft physical damage, marine and inland marine(inland only) and service contract reimbursement insurance, as specified in paragraph(s) 3, 4, 5, 6, 7, 8, 10, 12, 13, 14, 15, 16, 17, 19, 20 and 28 of Section 1113(a) of the New York Insurance Law to the extent permitted by certified copy of its charter document on file in this Department until July 1, 2014.

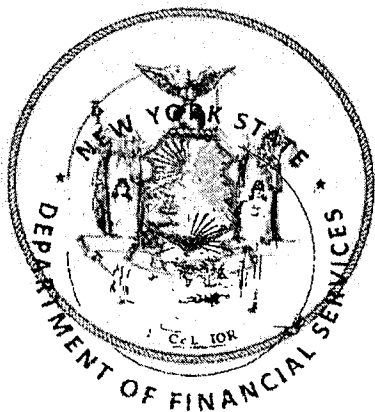

In Witness Whereof, I have hereunto set
my hand and affixed the official seal of this
Department at the City of Albany, New York, this
1st day of July, 2013

Benjamin M. Lawskey
Superintendent

By *Jacqueline Catalfamo*

Jacqueline Catalfamo
Special Deputy Superintendent

11



CERTIFICATE OF SOLVENCY UNDER SECTION 1111 OF THE NEW YORK
INSURANCE LAW

STATE OF NEW YORK
DEPARTMENT OF FINANCIAL SERVICES

It is hereby certified that

BANKERS INSURANCE COMPANY

Of St. Petersburg, Florida

a corporation organized under the laws of the State of Florida and duly authorized to transact the business of insurance in this State, is qualified to become surety or guarantor on all bonds, undertakings, recognizances, guaranties and other obligations required or permitted by law; and that the said corporation is possessed of a capital and surplus including gross paid-in and contributed surplus and unassigned funds (surplus) aggregating the sum of \$49,907,601 (Capital \$4,500,000) as is shown by its sworn financial statement for the Third Quarter of September 30, 2012, on file in this Department, prior to audit.

The said corporation cannot lawfully expose itself to loss on any one risk or hazard to an amount exceeding 10% of its surplus to policyholders, unless it shall be protected in excess of that amount in the manner provided in Section 4118 of the Insurance Law of this State.



In Witness Whereof, I have here-
unto set my hand and affixed the
official seal of this Department
at the City of Albany, this 11th
day of December, 2012

Benjamin M. Lawskey
Superintendent

By *Jacqueline Catalfamo*

Jacqueline Catalfamo
Special Deputy Superintendent

111



MWBE PROGRAM

M/WBE UTILIZATION PLAN

M/WBE Program Requirements: The requirements for the M/WBE Program are set forth on the following pages of this Bid Booklet, in the section entitled "Notice to All Prospective Contractors".

Schedule B: M/WBE Utilization Plan: Schedule B: M/WBE Utilization Plan for this Contract is set forth in this Bid Booklet on the pages following the section entitled "Notice to All Prospective Contractors". The M/WBE Utilization Plan (Part I) indicates whether Participation Goals have been established for this Contract. If Participation Goals have been established for this Contract, the bidder must submit an M/WBE Utilization Plan (Part II) with its bid.

Waiver: The bidder may seek a full or partial pre-award waiver of the Participation Goals in accordance with the "Notice to All Prospective Contractors" (See Part A, Section 10). The bidder's request for a waiver must be submitted at least seven (7) calendar days prior to the bid date. Waiver requests submitted after the deadline will not be considered. The form for requesting a waiver of the Participation Goals is set forth in the M/WBE Utilization Plan (Part III).

Rejection of the Bid: The bidder must complete Schedule B: M/WBE Utilization Plan (Part II) set forth in this Bid Booklet on the pages following the section entitled "Notice to All Prospective Contractors". A Schedule B submitted by the bidder which does not include the Vendor Certification and Required Affirmations (See Section V of Part II) will be deemed to be non-responsive, unless a full waiver of the Participation Goals is granted (Schedule B, Part III). In the event that the City determines that the bidder has submitted a Schedule B where the Vendor Certification and Required Affirmations are completed but other aspects of the Schedule B are not complete, or contain a copy or computation error that is at odds with the Vendor Certification and Required Affirmations, the bidder will be notified by the Agency and will be given four (4) calendar days from receipt of notification to cure the specified deficiencies and return a completed Schedule B to the Agency. Failure to do so will result in a determination that the Bid is non-responsive.

Receipt of notification is defined as the date notice is emailed or faxed (if the bidder has provided an email address or fax number), or no later than five (5) days from the date of mailing or upon delivery, if delivered.

Impact on LBE Requirements: If Participation Goals have been established for the participation of M/WBEs, the contractor is not required to comply with the Locally Based Enterprise Program ("LBE"). The LBE Program is set forth in Article 67 of the Contract.

THIS PAGE INTENTIONALLY LEFT BLANK

NOTICE TO ALL PROSPECTIVE CONTRACTORS

PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS
ENTERPRISES IN CITY PROCUREMENT

ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD
AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to

determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi-year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or**

below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's M/WBE Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its M/WBE Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an M/WBE Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at poped@ddc.nyc.gov or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the Participation Goals to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the Participation Goals. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of M/WBE Utilization Plan. (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission. The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the Participation Goals. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;
- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of an **M/WBE Utilization Plan**, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE Utilization Plan**.
2. Pursuant to DSBS rules, construction contracts that include a requirement for an **M/WBE Utilization Plan** shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.
3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.
4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).
5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the **M/WBE Program requirements** set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the **M/WBE Program requirements** of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.
2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE Utilization Plan**, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.
3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE Utilization Plan**, Agency may determine that one of the following actions should be taken:
 - (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
 - (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
 - (c) making a finding that the Contractor is in default of the Contract;
 - (d) terminating the Contract;
 - (e) declaring the Contractor to be in breach of Contract;
 - (f) withholding payment or reimbursement;
 - (g) determining not to renew the Contract;
 - (h) assessing actual and consequential damages;

- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6- 129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

Tax ID #: 20-045578

APT E-
PIN#: 85014B0147

Contract # 1 - General Construction Work

SCHEDULE B - M/WBE Utilization Plan

Part I: M/WBE Participation Goals

Part I to be completed by contracting agency

Contract Overview

APT E-Pin # 85014B0147 FMS Project ID#: PV467-STG

Project Title/Agency St. George Theatre Stage Rigging Replacement

PIN # 8502014PV0014C

Bid/Proposal
Response Date: TO BE DETERMINED BEFORE ISSUANCE

Contracting Agency Department of Design and Construction

Agency Address 30-30 Thomson Avenue City Long Island City State NY Zip Code 11101

Contact Person Norma Negrón Title MWBE Liaison & Compliance Analyst

Telephone # (718) 391-1502 Email negronn@ddc.nyc.gov

Project Description (attach additional pages if necessary)

This Project consists of removal and replacement of the existing stage rigging system, including structural reinforcement and partial replacement of the existing stage gridiron and roof structure; replacement of the rigging loading gallery; and a new ship's ladder for access from the stage floor to the gridiron. Work also includes removal and replacement of branch sprinkler piping at the gridiron, and new work lighting.

M/WBE Participation Goals for Services

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services

Prime Contract Industry: Construction

Group	Percentage
<u>Unspecified *</u>	<u>3 %</u>
or	
<u>Black American</u>	<u>Unspecified %</u>
<u>Hispanic American</u>	<u>Unspecified %</u>
<u>Asian American</u>	<u>Unspecified %</u>
<u>Women</u>	<u>Unspecified %</u>
Total Participation Goals	3 %

Line 1

Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.



Tax ID #: 20-0455782

APT E- PIN #: 8501470147

SCHEDULE B - Part II: M/WBE Participation Plan

Part II to be completed by the bidder/proposer.

Please note: For Non-M/WBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 5 and 6 and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

Section I: Prime Contractor Contact Information

Tax ID #	<u>20-0455782</u>	FMS Vendor ID #	
Business Name	<u>CastleStone Const. Corp</u>	Contact Person	<u>Gary Mapp</u>
Address	<u>36-20 13th St LLC, NY 11106</u>		
Telephone #	<u>718-472-5678</u>	Email	<u>Mappg@Castlestonecorp.com</u>

Section II: M/WBE Utilization Goal Calculation: Check the applicable box and complete subsection.

PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Agency M/WBE Participation Goals.	Total Bid/Proposal Value	Agency Total Participation Goals (Line 1, Page 1)	Calculated M/WBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	\$	X 3%	= \$ Line 2

PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Modified M/WBE Participation Goals.	Total Bid/Proposal Value	Adjusted Participation Goal (From Partial Waiver)	Calculated M/WBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	\$	X	= \$ Line 3



Section III: M/WBE Utilization Plan: How Proposer/Bidder Will Fulfill M/WBE Participation Goals. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation. Check applicable box. The Proposer or Bidder will fulfill the M/WBE Participation Goals:

As an M/WBE Prime Contractor that will self-perform and/or subcontract to other M/WBE firms a portion of the contract the value of which is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non-M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals. Please check all that apply to Prime Contractor:

MBE WBE

As a Qualified Joint Venture with an M/WBE partner, in which the value of the M/WBE partner's participation and/or the value of any work subcontracted to other M/WBE firms is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals.

As a non M/WBE Prime Contractor that will enter into subcontracts with M/WBE firms the value of which is at least the amount located on Lines 2 or 3 above, as applicable.

Section IV: General Contract Information

What is the expected percentage of the total contract dollar value that you expect to award in subcontracts for services, regardless of M/WBE status? % _____

Enter brief description of the type(s) and dollar value of subcontracts for all/any services you plan on subcontracting if awarded this contract. For each item, indicate whether the work is designated for participation by MBEs and/or WBEs and the time frame in which such work is scheduled to begin and end. Use additional sheets if necessary.

✓ Scopes of Subcontract Work

1. _____
2. _____
3. _____
4. _____
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____
11. _____
12. _____
13. _____
14. _____
15. _____
16. _____
17. _____



Section V: Vendor Certification and Required Affirmations

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth herein and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York ("Section 6-129"), and the rules promulgated thereunder;*
- 2) affirm that the information supplied in support of this M/WBE Utilization Plan is true and correct;*
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;*
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and*
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or If a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.*

Signature _____

Date _____

Print Name _____

Title _____



SCHEDULE B – PART III – REQUEST FOR WAIVER OF M/WBE PARTICIPATION REQUIREMENT

Contract Overview

Tax ID # _____ FMS Vendor ID # _____
 Business Name _____
 Contact Name _____ Telephone # _____ Email _____
 Type of Procurement Competitive Sealed Bids Other Bid/Response Due Date _____
 APT E-PIN # (for this procurement): _____ Contracting Agency: _____

M/WBE Participation Goals as described in bid/solicitation documents

_____ % Agency M/WBE Participation Goal

Proposed M/WBE Participation Goal as anticipated by vendor seeking waiver

_____ % of the total contract value anticipated in good faith by the bidder/proposer to be subcontracted for services and/or credited to an M/WBE Prime Contractor or Qualified Joint Venture.

Basis for Waiver Request: Check appropriate box & explain in detail below (attach additional pages if needed)

- Vendor does not subcontract services, and has the capacity and good faith intention to perform all such work itself with its own employees.
- Vendor subcontracts *some* of this type of work but at a *lower* % than bid/solicitation describes, and has the capacity and good faith intention to do so on this contract. (Attach subcontracting plan outlining services that the vendor will self-perform and subcontract to other vendors or consultants.)
- Vendor has other legitimate business reasons for proposing the M/WBE Participation Goal above. Explain under separate cover.

References

List 3 most recent contracts performed for NYC agencies (if any). Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

CONTRACT NO. _____	AGENCY _____	DATE COMPLETED _____
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO. _____	AGENCY _____	DATE COMPLETED _____
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO. _____	AGENCY _____	DATE COMPLETED _____
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____



List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

(Complete ONLY if vendor has performed fewer than 3 New York City contracts.)

TYPE OF Contract _____ ENTITY _____ DATE COMPLETED _____
 Manager at entity that hired vendor (Name/Phone No./Email) _____
 Total Contract Amount \$ _____ Total Amount Subcontracted \$ _____
 Type of Work Subcontracted _____

TYPE OF Contract _____ AGENCY/ENTITY _____ DATE COMPLETED _____
 Manager at agency/entity that hired vendor (Name/Phone No./Email) _____
 Total Contract Amount \$ _____ Total Amount Subcontracted \$ _____
 Item of Work Subcontracted and Value of subcontract _____ Item of Work Subcontracted and Value of subcontract _____ Item of Work Subcontracted and Value of subcontract _____

TYPE OF Contract _____ AGENCY/ENTITY _____ DATE COMPLETED _____
 Manager at entity that hired vendor (Name/Phone No./Email) _____
 Total Contract Amount \$ _____ Total Amount Subcontracted \$ _____
 Item of Work Subcontracted and Value of subcontract _____ Item of Work Subcontracted and Value of subcontract _____ Item of Work Subcontracted and Value of subcontract _____

VENDOR CERTIFICATION: I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

Signature: _____ Date: _____
 Print Name: _____ Title: _____

Shaded area below is for agency completion only

AGENCY CHIEF CONTRACTING OFFICER APPROVAL

Signature: _____ Date: _____

CITY CHIEF PROCUREMENT OFFICER APPROVAL

Signature: _____ Date: _____

Waiver Determination

Full Waiver Approved:
 Waiver Denied:
 Partial Waiver Approved:
 Revised Participation Goal: _____ %



Tax ID #: _____

APT E-

PIN#: 85014B0147

SCHEDULE B - Part II: M/WBE Participation Plan

Part II to be completed by the bidder/proposer:

Please note: For Non-M/WBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 9 and 9a and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

Section I: Prime Contractor Contact Information

Tax ID # _____ FMS Vendor ID # _____
 Business Name _____ Contact Person _____
 Address _____
 Telephone # _____ Email _____

Section II: M/WBE Utilization Goal Calculation: Check the applicable box and complete subsection.

PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Agency M/WBE Participation Goals.	Total Bid/Proposal Value	Agency Total Participation Goals (Line 1, Page 6)	Calculated M/WBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	1,301,200 \$ X	39,037.44 =	39,037.44 \$ Line 2

PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS

<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Modified M/WBE Participation Goals.	Total Bid/Proposal Value	Adjusted Participation Goal (From Partial Waiver)	Calculated M/WBE Participation Amount
Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	\$ X	=	\$ Line 3



List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

(Complete ONLY if vendor has performed fewer than 3 New York City contracts.)

TYPE OF Contract _____	ENTITY _____	DATE COMPLETED _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Type of Work Subcontracted _____	_____	_____

TYPE OF Contract _____	AGENCY/ENTITY _____	DATE COMPLETED _____
Manager at agency/entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

TYPE OF Contract _____	AGENCY/ENTITY _____	DATE COMPLETED _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

VENDOR CERTIFICATION: I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

Signature: _____ **Date:** _____
Print Name: _____ **Title:** _____

Shaded area below is for agency completion only

AGENCY CHIEF CONTRACTING OFFICER APPROVAL
Signature: _____ **Date:** _____

CITY CHIEF PROCUREMENT OFFICER APPROVAL
Signature: _____ **Date:** _____

Waiver Determination

Full Waiver Approved:
 Waiver Denied:
 Partial Waiver Approved:
 Revised Participation Goal: _____ %



Tax ID #: _____

APT E-
PIN#: 85014B0147

Contract # 1 - General Construction Work

SCHEDULE B - M/WBE Utilization Plan

Part I: M/WBE Participation Goals

Part I to be completed by contracting agency

Contract Overview

APT E-Pin # 85014B0147 FMS Project ID#: PV467-STG

Project Title/Agency St. George Theatre Stage Rigging Replacement

PIN # 8502014PV0014C

Bid/Proposal Response Date: WEDNESDAY, JULY 2ND, 2014

Contracting Agency Department of Design and Construction

Agency Address 30-30 Thomson Avenue City Long Island City State NY Zip Code 11101

Contact Person Norma Negrón Title MWBE Liaison & Compliance Analyst

Telephone # (718) 391-1502 Email negronn@ddc.nyc.gov

Project Description *(attach additional pages if necessary)*

This Project consists of removal and replacement of the existing stage rigging system, including structural reinforcement and partial replacement of the existing stage gridiron and roof structure; replacement of the rigging loading gallery; and a new ship's ladder for access from the stage floor to the gridiron. Work also includes removal and replacement of branch sprinkler piping at the gridiron, and new work lighting.

M/WBE Participation Goals for Services

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services

Prime Contract Industry: Construction

Group	Percentage	
<u>Unspecified *</u>	<u>3</u>	<u>%</u>
OR		
Black American	<u>Unspecified</u>	<u>%</u>
Hispanic American	<u>Unspecified</u>	<u>%</u>
Asian American	<u>Unspecified</u>	<u>%</u>
Women	<u>Unspecified</u>	<u>%</u>
Total Participation Goals	3	%

Line 1

Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.

THIS PAGE INTENTIONALLY LEFT BLANK

SAFETY QUESTIONNAIRE

The bidder must include, with its bid, all information requested on this Safety Questionnaire. Failure to provide a completed and signed Safety Questionnaire at the time of bid opening may result in disqualification of the bid as non-responsive.

1. Bidder Information:

Company Name: CASTLESTONE CONSTRUCTION CORP.

DDC Project Number: P.D. 85612B0147

Company Size: Ten (10) employees or less

Greater than ten (10) employees

Company has previously worked for DDC YES NO

2. Type(s) of Construction Work

TYPE OF WORK	LAST 3 YEARS	THIS PROJECT
General Building Construction	/	/
Residential Building Construction	/	/
Nonresidential Building Construction	/	/
Heavy Construction, except building	/	/
Highway and Street Construction	/	/
Heavy Construction, except highways	/	/
Plumbing, Heating, HVAC	/	/
Painting and Paper Hanging	/	/
Electrical Work	/	/
Masonry, Stonework and Plastering	/	/
Carpentry and Floor Work	/	/
Roofing, Siding, and Sheet Metal	/	/
Concrete Work	/	/
Specialty Trade Contracting	/	/
Asbestos Abatement	/	/
Other (specify)	/	/

3. Experience Modification Rate:

The Experience Modification Rate (EMR) is a rating generated by the National Council of Compensation Insurance (NCCI). This rating is used to determine the contractor's premium for worker's compensation insurance. The contractor may obtain its EMR by contacting its insurance broker or the NCCI. If the contractor cannot obtain its EMR, it must submit a written explanation as to why.



The Contractor must indicate its Intrastate and Interstate EMR for the past three years. [Note: For contractors with less than three years of experience, the EMR will be considered to be 1.00].

YEAR	INTRASTATE RATE	INTERSTATE RATE
<u>2013</u>	<u>1.0</u>	<u>1.0</u>
<u>2012</u>	<u>1.0</u>	<u>1.0</u>
<u>2011</u>	<u>1.0</u>	<u>1.0</u>

If the Intrastate and/or Interstate EMR for any of the past three years is greater than 1.00, the contractor must attach, to this questionnaire, a written explanation for the rating and identify what corrective action was taken to correct the situation resulting in that rating.

4. OSHA Information:

- YES NO Contractor has received a willful violation issued by OSHA or New York City Department of Buildings (NYCDOB) within the last three years.
- YES NO Contractor has had an incident requiring OSHA notification within 8 hours (i.e., fatality, or hospitalization of three or more employees).

The Occupational Safety and Health Act (OSHA) of 1970 requires employers with ten or more employees, on a yearly basis to complete and maintain on file the form entitled "Log of Work-related Injuries and Illnesses". This form is commonly referred to as the OSHA 300 Log (OSHA 200 Log for 2001 and earlier).

The OSHA 300 Log must be submitted for the last three years for contractors with more than ten employees.

The Contractor must indicate the total number of hours worked by its employees, as reflected in payroll records for the past three years.

The contractor must submit the Incident Rate for Lost Time Injuries (the Incident Rate) for the past three years. The Incident Rate is calculated in accordance with the formula set forth below. For each given year, the total number of incidents is the total number of non-fatal injuries and illnesses reported on the OSHA 300 Log. The 200,000 hours represents the equivalent of 100 employees working forty hours a week, fifty weeks per year.

$$\text{Incident Rate} = \frac{\text{Total Number of Incidents} \times 200,000}{\text{Total Number of Hours Worked by Employees}}$$

YEAR	TOTAL NUMBERS OF HOURS WORKED BY EMPLOYEES	INCIDENT RATE
<u>2013</u>	<u>12,000</u>	<u>0</u>
<u>2012</u>	<u>16,000</u>	<u>0</u>
<u>2011</u>	<u>3,000</u>	<u>0</u>



If the contractor's Incident Rate for any of the past three years is one point higher than the Incident Rate for the type of construction it performs (listed below), the contractor must attach, to this questionnaire, a written explanation for the relatively high rate.

General Building Construction	8.5
Residential Building Construction	7.0
Nonresidential Building Construction	10.2
Heavy Construction, except building	8.7
Highway and Street Construction	9.7
Heavy Construction, except highways	8.3
Plumbing, Heating, HVAC	11.3
Painting and Paper Hanging	6.9
Electrical Work	9.5
Masonry, Stonework and Plastering	10.5
Carpentry and Floor Work	12.2
Roofing, Siding, and Sheet Metal	10.3
Concrete Work	8.6
Specialty Trade Contracting	8.6

5. Safety Performance on Previous DDC Project(s)

YES NO Contractor previously audited by the DDC Office of Site Safety.
 DDC Project Number(s): _____


YES NO Accident on previous DDC Project(s).
 DDC Project Number(s): _____

YES NO Fatality or Life-altering Injury on DDC Project(s) within the last three years.
 [Examples of a life-altering injury include loss of limb, loss of a sense (e.g., sight, hearing), or loss of neurological function].
 DDC Project Number(s): _____

Date: 7/21/14

By: *Larry E. Klynn*
 (Signature of Owner, Partner, Corporate Officer)

Title: CHIEF OPERATIONS OFFICER



APPRENTICESHIP PROGRAM REQUIREMENTS

Bidders are advised that the Apprenticeship Program Requirements set forth below apply to each contract for which a check mark is indicated before the word "Yes". Compliance with these requirements will be determined solely by the City.

General Construction YES x NO

* Note: Even if Yes is marked, the Exemption set forth below may apply.

1) Apprenticeship Program Requirements

NOTICE TO BIDDERS: Please be advised that, pursuant to the authority granted to the City under Labor Law Section 816-b, the Department of Design and Construction hereby requires that the contractor awarded a contract as a result of this Invitation for Bids, and any of its subcontractors with subcontracts worth one million dollars or over, have, prior to entering into such contract or subcontract, apprenticeship agreements appropriate for the type and scope of work to be performed that have been registered with, and approved by, the New York State Commissioner of Labor. In addition, the contractor and its subcontractors will be required to show that such apprenticeship programs have three years of current, successful experience in providing career opportunities.

The failure to prove, upon request, that these requirements have been met shall result in the contract not being awarded to the contractor or the subcontract not being approved.

Please be further advised that, pursuant to Labor Law Section 220, the allowable ratio of apprentices to journeypersons in any craft classification shall not be greater than the ratio permitted to the contractor as to its workforce on any job under the registered

2) Apprenticeship Program Questionnaire

The bidder must submit a completed and signed Apprenticeship Program Questionnaire, unless it qualifies for the exemption set forth below. The Questionnaire is set forth on the

3) Exemption

Bidders for the General Construction Contract are advised that the exemption set forth below applies if an "X" is indicated before the word "Yes".

----- YES

----- NO

Exemption: If the bidder intends to subcontract 100% of the construction work, it is not required to demonstrate that it has an Apprenticeship Agreement(s), nor is it required to submit an Apprenticeship Program Questionnaire. If the bidder qualifies for this exemption, it shall submit a letter stating that it intends to subcontract 100% of the construction work. As indicated above, the Apprenticeship Program Requirements apply to subcontracts worth one million dollars or more.

APPRENTICESHIP PROGRAM QUESTIONNAIRE

PROJECT ID: PV467-STG

The bidder must submit a completed and signed Apprenticeship Program Questionnaire unless it qualifies for the exemption set forth on the previous page.

Name of Bidder: Castlestone Construction Corp

1) Does the bidder have an Apprenticeship Program appropriate for the type and scope of work to be performed?
[Note: Participation may be by either direct sponsorship or through collective bargaining agreement(s).]

_____ YES NO

2) Has the bidder's Apprenticeship Program been registered with, and approved by, the New York State Commissioner of Labor?

_____ YES NO

3) Has the bidder's Apprenticeship Program had three years of successful experience in providing career opportunities?

_____ YES NO

If the answer to Question #3 is "Yes", the bidder shall, in the space below, provide information regarding the experience the Apprenticeship Program has had in providing career opportunities. The bidder may attach additional pages if necessary.

Bidder: Castlestone Construction Corp

By: Abdul L. Muhammad
(Signature of Partner or Corporate Officer)

Title: President

Date: 6-24-14

A. PROJECT REFERENCES - SIMILAR CONTRACTS COMPLETED BY THE BIDDER

List all contracts substantially completed within the last 4 years similar to the contract being awarded, up to a maximum of 10, in descending order of date of substantial completion.

Project & Location	Contract Type	Contract Amount (\$000)	Date Completed	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner
Tilden Houses North St. Brooklyn	Steel Structural	300k	11/17	NYCHA	
St. George Terrace 35 HUNT ST.	Steel Masonry	100k	6/14	WAYNE 917-318,600	
615-717 521 West 154th St. NY	Steel Masonry	250k	12/13	Reggie Prosser 916-577-6693	

B. PROJECT REFERENCES – CONTRACTS CURRENTLY UNDER CONSTRUCTION BY THE BIDDER

List all contracts currently under construction even if they are not similar to the contract being awarded.

Project & Location	Contract Type	Contract Amount (\$000)	Subcontracted to Others (\$000)	Uncompleted Portion (\$000)	Date Scheduled to Complete	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner
Bellevue Hospital	GIC	281,991	95,000	265,991	9/2014	Ilia 212-562-4141	
SCM							

C. PROJECT REFERENCES – PENDING CONTRACTS NOT YET STARTED BY THE BIDDER

List all contracts awarded to or won by the bidder but not yet started.

Project & Location	Contract Type	Contract Amount (\$000)	Date Scheduled to Start	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner
SUNY Maritime 6 Pennyfield Drive BX, NY	GC	222,000	7/2014	Killian 718-409-3860	
Urgent Care 3200 Grand Concourse BX, NY	GC	400,000	7/2014	Harvey 917-561-7975	

THIS PAGE INTENTIONALLY LEFT BLANK

VENDEX COMPLIANCE

(A) **Vendex Fees:** Pursuant to Procurement Policy Board Rule 2-08(f)(2), the contractor will be charged a fee for the administration of the VENDEX system, including the Vendor Name Check process, if a Vendor Name Check review is required to be conducted by the Department of Investigation. The contractor shall also be required to pay the applicable required fees for any of its subcontractors for which Vendor Name Check reviews are required. The fee(s) will be deducted from payments made to the contractor under the contract. For contracts with an estimated value of less than or equal to \$1,000,000, the fee will be \$175 per Vendor Name Check review. For contracts with an estimated value of greater than \$1,000,000, the fee will be \$350 per Vendor Name Check review.

(B) **Confirmation of Vendex Compliance:** The Bidder shall submit this Confirmation of Vendex Compliance to the Department of Design and Construction, Contracts Section, 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101.

Bid Information: The Bidder shall complete the bid information set forth below.

Name of Bidder: Castlestone Const Corp
Bidder's Address: 36-20 134th St LIC NY 11106
Bidder's Telephone Number: 718-472-5678
Bidder's Fax Number: 718-472-5683
Date of Bid Opening: 7/2/14
Project ID: 85012B0147

Vendex Compliance: To demonstrate compliance with Vendex requirements, the Bidder shall complete either Section (1) or Section (2) below, whichever applies.

(1) **Submission of Vendex Questionnaires to MOCS:** By signing in the space provided below, the Bidder certifies that as of the date specified below, the Bidder has submitted Vendex Questionnaires to the Mayor's Office of Contract Services, Attn: VENDEX, 253 Broadway, 9th Floor, New York, New York 10007.

Date of Submission: _____

By: Abdul L. Munawar
(Signature of Partner or corporate officer)

Print Name: ABDUL L MUNAWAR

(2) **Submission of Certification of No Change to DDC:** By signing in the space provided below, the Bidder certifies that it has read the instructions in a "Vendor's Guide to Vendex" and that such instructions do not require the Bidder to submit Vendex Questionnaires. The Bidder has completed **TWO ORIGINALS** of the Certification of No Change set forth on the next page of this Bid Booklet.

By: Abdul L. Munawar
(Signature of Partner or corporate officer)

Print Name: ABDUL L MUNAWAR



DIRECTIONS: Please execute two originals (both with original signature).
Please forward directly to the agency (not M.O.C.S.).



Certificate of No Change Form

- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, Abdul L. Murawar, being duly sworn, state that I have read
Enter Your Name

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

Vendor Questionnaire *This section is required.*

This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.

Name of Submitting Entity: Castlestone Construction Corp

Vendor's Address: 36-20 134th St LIC, NY 11406

Vendor's EIN or TIN: 20-0455782 Requesting Agency: DDC

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed for the submitting vendor: _____

Signature date on change submission for the submitting vendor: _____

Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



	Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change
1	ABDUL L. MUNAWAR	4/12	6/12
2			
3			
4			
5			
6			

Check if additional changes were submitted and attach a document with the date of additional submissions.

Certification This section is required.

This form must be signed and notarized. Please complete this twice. Copies will not be accepted.

Certified By:

Abdul L. Munawar

Name (Print)

President

Title

Castlestone Construction Corp

Name of Submitting Entity

Abdul L. Munawar

Signature

07/08/14

Date

Notarized By:

Stefanopoulos V. Kostas

Notary Public

STEFANOPOULOS VITENTIA
NOTARY PUBLIC, STATE OF NEW YORK
Registration No. 01ST6099670
Qualified in Queens County
Commission Expires 10/06/2015

County License Issued

License Number

Sworn to before me on:

07/08/14

Date

IRAN DIVESTMENT ACT COMPLIANCE RIDER

FOR NEW YORK CITY CONTRACTORS

The Iran Divestment Act of 2012, effective as of April 12, 2012, is codified at State Finance Law (“SFL”) §165-a and General Municipal Law (“GML”) §103-g. The Iran Divestment Act, with certain exceptions, prohibits municipalities, including the City, from entering into contracts with persons engaged in investment activities in the energy sector of Iran. Pursuant to the terms set forth in SFL §165-a and GML §103-g, a person engages in investment activities in the energy sector of Iran if:

- (a) The person provides goods or services of twenty million dollars or more in the energy sector of Iran, including a person that provides oil or liquefied natural gas tankers, or products used to construct or maintain pipelines used to transport oil or liquefied natural gas, for the energy sector of Iran; or
- (b) The person is a financial institution that extends twenty million dollars or more in credit to another person, for forty-five days or more, if that person will use the credit to provide goods or services in the energy sector in Iran and is identified on a list created pursuant to paragraph (b) of subdivision three of Section 165-a of the State Finance Law and maintained by the Commissioner of the Office of General Services.

A bid or proposal shall not be considered for award nor shall any award be made where the bidder or proposer fails to submit a signed and verified bidder’s certification.

Each bidder or proposer must certify that it is not on the list of entities engaged in investment activities in Iran created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. In any case where the bidder or proposer cannot certify that they are not on such list, the bidder or proposer shall so state and shall furnish with the bid or proposal a signed statement which sets forth in detail the reasons why such statement cannot be made. The City of New York may award a bid to a bidder who cannot make the certification on a case by case basis if:

- (1) The investment activities in Iran were made before the effective date of this section (i.e., April 12, 2012), the investment activities in Iran have not been expanded or renewed after the effective date of this section and the person has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran: or
- (2) The City makes a determination that the goods or services are necessary for the City to perform its functions and that, absent such an exemption, the City would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

**BIDDER'S CERTIFICATION OF COMPLIANCE WITH
IRAN DIVESTMENT ACT**

Pursuant to General Municipal Law §103-g, which generally prohibits the City from entering into contracts with persons engaged in investment activities in the energy sector of Iran, the bidder/proposer submits the following certification:

[Please Check One]

BIDDER'S CERTIFICATION

By submission of this bid or proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief, that each bidder/proposer is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law.

I am unable to certify that my name and the name of the bidder/proposer does not appear on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. I have attached a signed statement setting forth in detail why I cannot so certify.

Dated: _____, New York
7/8, 2014

Abdul L. Munawar

SIGNATURE

Abdul L. Munawar

PRINTED NAME


President

TITLE

Sworn to before me this
08 day of July, 2014

VBR
Notary Public

Dated: 08/July/14





**Small Business
Services**

Maria Torres-Springer
Commissioner

DDC-BID ROOM CONTRACTS

2014 JUL 28 P 3: 23

214CY217

July 24, 2014

Mr. Abdul L. Munawar, President
Castlestone Construction Corp.
36-20 13th Street
Long Island City, NY 11106

RE: **NYC Department of Design and Construction Contract (DDC);** Pin No. 8502014PV0014C; Project No. PV467-STG; St. George Theater Stage rigging replacement; Borough of Staten Island; Contract Value: \$1,301,248.00; **Certificate of Approval.**

Dear Mr. Munawar:

DLS has concluded that Castlestone Construction Corp. meets the equal employment opportunity requirements of the City of New York, as stated in Executive Order No. 50 (1980) as amended (E.O. 50), its implementing Rules (Rules), and Chapter 56 of the City Charter (Chapter 56). Consequently, DLS has notified **(DDC)** of this determination.

Contingent upon Castlestone Construction Corp.'s ongoing compliance with E.O. 50 and Chapter 56, this approval shall be effective for the three (3) year period commencing on **July 21, 2014** and terminating **July 20, 2017**. **This determination for a three (3) year approval only exempts contractors from completing the policy and procedure section of the Employment Report on future contracts within this three year period.** However, Construction Employment Report workforce information must be submitted for each new project. In addition, Castlestone Construction Corp. must submit to **DLS Monthly Workforce Utilization Table and Monthly Payroll Records** on a monthly basis as explained during the pre-award conference on **July 21, 2014**.

PAGE TWO
JULY 24, 2014

It is important that Castlestone Construction Corp. as a New York City contractor provide equal employment opportunity for all employees and applicants for employment.

Please direct all correspondence to Ms. Rosalyn Dawson, Project Manager. Should you have any questions regarding this letter, you may call Ms. Dawson at (212) 618-8843 or e-mail her at rdawson@sbs.nyc.gov.

Very truly yours,



Kim Muldrow-Maxwell
Director
Division of Labor Services

cc: Lorraine Holley (DDC)
Rosalyn Dawson
File

CITY OF NEW YORK

DIVISION OF LABOR SERVICES

CONSTRUCTION EMPLOYMENT REPORT

THIS PAGE INTENTIONALLY LEFT BLANK

The City of New York Department of Small Business Services
Division of Labor Services Contract Compliance Unit
110 William Street, New York, New York 10038
Phone: (212) 513 - 6323
Fax: (212) 618-8879

CONSTRUCTION EMPLOYMENT REPORT

GENERAL INFORMATION

1. Your contractual relationship in this contract is: Prime contractor Subcontractor
- 1a. Are MWBE goals attached to this project? Yes No
2. Please check one of the following if your firm would like information on how to certify with the City of New York as a:
 Minority Owned Business Enterprise Locally Based Business Enterprise
 Women Owned Business Enterprise Emerging Business Enterprise
 Disadvantaged Business Enterprise
- 2a. If you are certified as an MBE, WBE, LBE, EBE or DBE, what city/state agency are you certified with? WBE Are you DBE certified? Yes No
3. Please indicate if you would like assistance from SBS in identifying certified MWBEs for contracting opportunities: Yes No
4. Is this project subject to a project labor agreement? Yes No
5. Are you a Union contractor? Yes No If yes, please list which local(s) you affiliated with _____
6. Are you a Veteran owned company? Yes No

PART I: CONTRACTOR/SUBCONTRACTOR INFORMATION

7. 20-0455782 INFO@CASTLESTONE Corp. co
Employer Identification Number or Federal Tax I.D. Email Address
8. CASTLESTONE CONSTRUCTION Corp
Company Name
9. 36-20 13th ST.
Company Address and Zip Code
10. GARY MAPP 718-472-5678
Chief Operating Officer Telephone Number
11. GARY MAPP 718-472-5678
Designated Equal Opportunity Compliance Officer Telephone Number
(If same as Item #10, write "same")
12. SALE
Name of Prime Contractor and Contact Person
(If same as Item #8, write "same")

13. Number of employees in your company: _____

14. Contract information:

(a) _____
Contracting Agency (City Agency)

(b) _____
Contract Amount

(c) _____
Procurement Identification Number (PIN)

(d) _____
Contract Registration Number (CT#)

(e) _____
Projected Commencement Date

(f) _____
Projected Completion Date

(g) Description and location of proposed contract:

15. Has your firm been reviewed by the Division of Labor Services (DLS) within the past 36 months and issued a Certificate of Approval? Yes___ No___

If yes, attach a copy of certificate.

16. Has DLS within the past month reviewed an Employment Report submission for your company and issued a Conditional Certificate of Approval? Yes___ No___

If yes, attach a copy of certificate.

NOTE: DLS WILL NOT ISSUE A CONTINUED CERTIFICATE OF APPROVAL IN CONNECTION WITH THIS CONTRACT UNLESS THE REQUIRED CORRECTIVE ACTIONS IN PRIOR CONDITIONAL CERTIFICATES OF APPROVAL HAVE BEEN TAKEN.

17. Has an Employment Report already been submitted for a different contract (not covered by this Employment Report) for which you have not yet received compliance certificate?
Yes___ No___ If yes,

Date submitted: _____

Agency to which submitted: _____

Name of Agency Person: _____

Contract No: _____

Telephone: _____

18. Has your company in the past 36 months been audited by the United States Department of Labor, Office of Federal Contract Compliance Programs (OFCCP)? Yes___ No___

If yes,

(a) Name and address of OFCCP office.

(b) Was a Certificate of Equal Employment Compliance issued within the past 36 months?
Yes ___ No

If yes, attach a copy of such certificate.

(c) Were any corrective actions required or agreed to? Yes ___ No

If yes, attach a copy of such requirements or agreements.

(d) Were any deficiencies found? Yes ___ No

If yes, attach a copy of such findings.

19. Is your company or its affiliates a member or members of an employers' trade association which is responsible for negotiating collective bargaining agreements (CBA) which affect construction site hiring? Yes ___ No

If yes, attach a list of such associations and all applicable CBA's.

PART II: DOCUMENTS REQUIRED

20. For the following policies or practices, attach the relevant documents (e.g., printed booklets, brochures, manuals, memoranda, etc.). If the policy(ies) are unwritten, attach a full explanation of the practices. See instructions.

- (a) Health benefit coverage/description(s) for all management, nonunion and union employees (whether company or union administered)
- (b) Disability, life, other insurance coverage/description
- (c) Employee Policy/Handbook
- (d) Personnel Policy/Manual
- (e) Supervisor's Policy/Manual
- (f) Pension plan or 401k coverage/description for all management, nonunion and union employees, whether company or union administered
- (g) Collective bargaining agreement(s).
- (h) Employment Application(s)
- (i) Employee evaluation policy/form(s).
- (j) Does your firm have medical and/or non-medical (i.e. education, military, personal, pregnancy, child care) leave policy? NO

21. To comply with the Immigration Reform and Control Act of 1986 when and of whom does your firm require the completion of an I-9 Form?

- (a) Prior to job offer Yes___ No___
- (b) After a conditional job offer Yes___ No___
- (c) After a job offer Yes___ No___
- (d) Within the first three days on the job Yes___ No___
- (e) To some applicants Yes___ No___
- (f) To all applicants Yes___ No___
- (g) To some employees Yes___ No___
- (h) To all employees Yes___ No___

22. Explain where and how completed I-9 Forms, with their supportive documentation, are maintained and made accessible.

23. Does your firm or any of its collective bargaining agreements require job applicants to take a medical examination? Yes___ No___

If yes, is the medical examination given:

- (a) Prior to a job offer Yes___ No___
- (b) After a conditional job offer Yes___ No___
- (c) After a job offer Yes___ No___
- (d) To all applicants Yes___ No___
- (e) Only to some applicants Yes___ No___

If yes, list for which applicants below and attach copies of all medical examination or questionnaire forms and instructions utilized for these examinations.

24. Do you have a written equal employment opportunity (EEO) policy? Yes___ No___

If yes, list the document(s) and page number(s) where these written policies are located.

25. Does the company have a current affirmative action plan(s) (AAP)

- ___ Minorities and Women
- ___ Individuals with handicaps
- ___ Other. Please specify _____

26. Does your firm or collective bargaining agreement(s) have an internal grievance procedure with respect to EEO complaints? Yes___ No___

If yes, please attach a copy of this policy.

If no, attach a report detailing your firm's unwritten procedure for handling EEO complaints.

27. Has any employee, within the past three years, filed a complaint pursuant to an internal grievance procedure or with any official of your firm with respect to equal employment opportunity? Yes ___ No

If yes, attach an internal complaint log. See instructions.

28. Has your firm, within the past three years, been named as a defendant (or respondent) in any administrative or judicial action where the complainant (plaintiff) alleged violation of any anti-discrimination or affirmative action laws? Yes ___ No

If yes, attach a log. See instructions.

29. Are there any jobs for which there are physical qualifications? Yes ___ No

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

30. Are there any jobs for which there are age, race, color, national origin, sex, creed, disability, marital status, sexual orientation, or citizenship qualifications? Yes ___ No

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

SIGNATURE PAGE

I, (print name of authorized official signing) _____ hereby certify that the information submitted herewith is true and complete to the best of my knowledge and belief and submitted with the understanding that compliance with New York City's equal employment requirements, as contained in Chapter 56 of the City Charter, Executive Order No. 50 (1980), as amended, and the implementing Rules and Regulations, is a contractual obligation. I also agree on behalf of the company to submit a certified copy of payroll records to the Division of Labor Services on a monthly basis.

Castlestone Construction Corp.
Contractor's Name

Gary Mapp COO
Name of person who prepared this Employment Report Title

Abdul L. Munawar President
Name of official authorized to sign on behalf of the contractor Title

718-472-5678
Telephone Number

Abdul L. Munawar 7/8/14
Signature of authorized official Date

If contractors are found to be underutilizing minorities and females in any given trade based on Chapter 56 Section 3H, the Division of Labor Services reserves the right to request the contractor's workforce data and to implement an employment program.

Contractors who fail to comply with the above mentioned requirements or are found to be in noncompliance may be subject to the withholding of final payment.


Willful or fraudulent falsifications of any data or information submitted herewith may result in the termination of the contract between the City and the bidder or contractor and in disapproval of future contracts for a period of up to five years. Further, such falsification may result in civil and/or criminal prosecution.

To the extent permitted by law and consistent with the proper discharge of DLS' responsibilities under Charter Chapter 56 of the City Charter and Executive Order No. 50 (1980) and the implementing Rules and Regulations, all information provided by a contractor to DLS shall be confidential.

Only original signatures accepted.

Sworn to before me this 8th day of July 2014

Stefanos V. Vite 07/08/14
Notary Public Authorized Signature Date



FORM A. CONTRACT BID INFORMATION: USE OF SUBCONTRACTORS/TRADES

1. Do you plan to subcontractor work on this contract? Yes ___ No ___
2. If yes, complete the chart below.

NOTE: All proposed subcontractors with a subcontract in excess of \$750,000 must complete an Employment Report for review and approval before the contract may be awarded and work commences.

SUBCONTRACTOR'S NAME*	OWNERSHIP (ENTER APPROPRIATE CODE LETTERS BELOW)	WORK TO BE PERFORMED BY SUBCONTRACTOR	TRADE PROJECTED FOR USE BY SUBCONTRACTOR	PROJECTED DOLLAR VALUE OF SUBCONTRACT

*If subcontractor is presently unknown, please enter the trade (craft name).

OWNERSHIP CODES

- W: White
- B: Black
- H: Hispanic
- A: Asian
- N: Native American
- F: Female

FORM B: PROJECTED WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (A) Apprentice
- (TRN) Trainee
- (TOT) Total by Column

For each trade to be engaged by your company for this project, enter the projected workforce for Males and Females by trade classification on the charts below.

Trade: Plumbing

Union Affiliation, if applicable _____

Total (Col. #1-10): 17

Total Minority, Male & Female (Col. #2,3,4,5,7,8,9, & 10): 12

Total Female (Col. #6-10): 3

	MALES					FEMALES							
	(1) White Non Hisp.		(2) Black Non Hisp.		(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.		(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
	White Non Hisp.	Black Non Hisp.	White Non Hisp.	Black Non Hisp.	Hispanic	Asian	Native Amer.	White Non Hisp.	Black Non Hisp.	Hispanic	Asian	Native Amer.	
J	2		4		4								
H			2		2								
A													
TRN													
TOT	2		6		6								

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM B: PROJECTED WORKFORCE

Trade: _____

Union Affiliation, if applicable _____

Total (Col. #1-10): _____

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10): _____

Total Female
(Col. #6 - 10): _____

MALES

(1) White Non Hispanic	(2) Black Non Hispanic	(3) Hispanic	(4) Asian	(5) Native Amer.
J				
H				
A				
TRN				
TOT				

FEMALES

(6) White Non Hispanic	(7) Black Non Hispanic	(8) Hispanic	(9) Asian	(10) Native Amer.
J				
H				
A				
TRN				
TOT				

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM C: CURRENT WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (A) Apprentice
- (TRN) Trainee
- (TOT) Total by Column

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade: Community

Union Affiliation, if applicable

Total (Col. #1-10): 2

Total Minority, Male & Female
Col. #2,3,4,5,7,8,9, & 10): 1

Total Female
Col. #6-10): 0

	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J	1	2	2							
H		1	2							
A										
TRN										
TOT	1	3	4							

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Unions, Community Outreach

FORM C: CURRENT WORKFORCE

Trade: Masonry

Union Affiliation, if applicable

Total (Col. #1-10): 2

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10): 2

Total Female
(Col. #6 - 10): 0

		MALES					FEMALES				
		(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J				2							
H				2							
A											
TRN											
TOT				2							

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

Community Outreach, Unions

Castlestone Construction Corp.

Application for Employment

Our policy is to provide equal employment opportunity to all qualified persons without regard to race, creed, color, religious belief, sex, age, national origin, ancestry, physical or mental disability, or veteran status.

Date _____

Last name _____ First name _____ Middle name _____

Street Address _____

City _____ State _____ ZIP _____

Telephone _____ Social Security # _____

Position applied for _____

When can you start? _____

Are you a U.S. citizen or otherwise authorized to work in the U.S. on an unrestricted basis? (You may be required to provide documentation.) Yes No

Are you looking for full-time employment? Yes No

If no, what hours are you available? _____

Are you willing to work night shift? Yes No

Have you ever been convicted of a felony? (This will not necessarily affect your application.)
 Yes No

If yes, please describe conditions. _____

Education

	School Name and Location	Year	Major	Degree
High School	_____	_____	_____	_____



College _____

College _____

Post-College _____

Other Training _____

In addition to your work history, are there other skills, qualifications, or experience that we should consider?

Employment History (Start with most recent employer)

Company Name _____

Address _____ Telephone _____

Date Started _____ Starting Wage _____ Starting Position _____

Date Ended _____ Ending Wage _____ Ending Position _____

Name of Supervisor _____

May we contact? Yes No

Responsibilities _____

Reason for leaving _____

Company Name _____

Address _____ Telephone _____

Date Started _____ Starting Wage _____ Starting Position _____

Date Ended _____ Ending Wage _____ Ending Position _____

Name of Supervisor _____

May we contact? Yes No

Responsibilities _____



Reason for leaving _____

Attach additional information if necessary.

I certify that the facts set forth in this application for employment are true and complete to the best of my knowledge. I understand that if I am employed, false statements on this application shall be considered sufficient cause for dismissal. This company is hereby authorized to make any investigations of my prior educational and employment history.

I understand that employment at this company is "at will," which means that either I or this company can terminate the employment relationship at any time, with or without prior notice, and for any reason not prohibited by statute. All employment is continued on that basis. I understand that no supervisor, manager, or executive of this company, other than the president, has any authority to alter the foregoing.

Signature _____ Date _____



POLICY STATEMENT

Castelstone Construction Corp.'s Equal Employment Opportunity and Affirmative Action Policy is to apply to all employees and applicants.

Policy

1. It is the Castlestone Construction's policy to provide equal employment opportunity to all employees and applicants for employment without regard to race, sex, color, creed, religion, national origin, age, disability, marital status or sexual orientation in accordance with all applicable laws, directives and regulations of federal, state and city entities. This policy applies to all the terms and conditions of employment including, but not limited to hiring, placement, promotion, termination, layoff, recall, transfer, leave of absence, compensation and training. Advancement to positions of greater responsibility is based on an individual's abilities and demonstrated performance.
2. Castlestone Construction Corp. is committed to Equal Employment Opportunity and as part of our Affirmative Action Plan we shall:
 - (a) Recruit, hire, upgrade, train and promote in all job classifications, without regard to race, sex, color, creed, religion, age, national origin, disability, marital status or sexual orientation in accordance with all applicable laws, directives and regulations of federal, state and city entities;
 - (b) Base employment decisions on the principles of Equal Employment Opportunity, and with the intent to further the Company's Affirmative Action commitment;
 - (c) Ensure that all terms and conditions of employment such as compensation, benefits, layoff, return from layoff, Company-sponsored training, educational tuition assistance, social and recreation programs, shall be administered without regard to race, sex, color, creed, religion, age, national origin, disability, marital status or sexual orientation in accordance with all applicable laws, directives and regulations federal, state and city authorities;



- (d) **Ensure that promotion decisions will be made in accordance with the principles of Equal Employment Opportunity and Affirmative Action by imposing only valid requirements for promotional opportunities;**
 - (e) **Take action to prevent harassment including sexual harassment or intimidation of all employees, particularly those encompassed by Castlestone's affirmative action efforts.**
- 3. **Castlestone Construction Corp. will vigorously pursue opportunities to recruit and develop job candidates who have the desire and potential for becoming qualified employees through our Affirmative Action Program.**
- 4. **Management performance in this program will be evaluated, as is performance in other company goals.**
- 5. **Gary Mapp Chief Operations Officer has been assigned responsibility for the implementation and administration of the Affirmative Action Program. He/She also has been designated to develop and administer the Affirmative Action Program and ensure that the intent and practice of this policy is carried out.**





CASTLESTONE
Construction Corp.

Internal Grievance Procedures

- If informal discussions fail to resolve a grievance/dispute, a formal complaint is made in writing to the Vice President, complaints officer or other appropriate person designated to deal with formal grievances.
- The complainant must set out all the details of the grievance or dispute.
- The complaints officer, or person designated to deal with the complaint, attempts to resolve the matter with the complainant.
- If the complaint involves another person or persons, it is necessary to discuss the matter with the other person or persons concerned to get their side of the story.
- If there is a dispute between two or more people, mediation may be recommended at this stage, where an impartial third party attempts to assist the parties to resolve their dispute. The mediator may be a member of the association or an external person. The mediator must be acceptable to the parties, and should not have any stake in the outcome. The mediator facilitates the discussion between the parties and guides them towards a solution. Each party is given a fair opportunity to state their case. The mediator does not decide the dispute or impose a solution on the parties. The role of the mediator is to assist the parties find their solution.
- If mediation fails, or it is not considered appropriate in the circumstances, the matter is referred to an impartial grievance committee.
- The grievance committee invites the parties to attend a hearing, and gathers all the necessary information needed to make a decision.
- At the hearing, the parties have an opportunity to outline the basis of the grievance or dispute, to present documentation and call persons. Where the grievance/dispute involves complex issues, the parties may be entitled to legal representation.
- The committee sums up the issues and, after considering all the information presented to them, the committee makes a decision. The committee informs the parties of their decision or recommendations.
- After the hearing and after a decision has been reached, the parties may appeal against a decision or recommendation made by the committee. The parties must be given a reasonable time in which to submit an appeal in writing.
- The committee should keep detailed and accurate notes of the hearing and the outcome.
- A notice of a grievance or dispute may be withdrawn at any time.

Awais Munawar
Vice President





CASTLESTONE
Construction Corp.

CASTLESTONE CONSTRUCTION CORP. SAFETY AGREEMENT

I _____ HAVE READ AND UNDERSTAND THE
SAFETY PLAN GIVEN TO ME FROM CASTLESTONE CONSTRUCTION AND
AGREE TO ABIDE BY ALL RULES AND OSHA REGULATIONS WHILE
EMPLOYED BY CASTLESTONE CONSTRUCTION. THIS AGREEMENT APPLIES
TO ALL SUBCONTRACTORS AS WELL.


_____ SITE SUPERVISOR

_____ DATE

_____ SIGNATURE

PROJECT- TARRYTOWN MUSIC HALL

Castlestone Construction Corp.
Construction Management & General Contractor
36-20 13th Street, Long Island City, New York 11106
www.castlestonecorp.com
info@castlestonecorp.com
718-472-5678 Office
718-472-5683 Fax





CASTLESTONE
Construction Corp.

Castlestone Construction Corp.
Construction Management & General Contractor
36-20 13th Street, Long Island City, New York 11106
www.castlestonecorp.com
info@castlestonecorp.com
718-472-5678 Office
718-472-5683 Fax



**BID BOOKLET
PART A**

SPECIAL NOTICE TO BIDDERS

The New York City Department of Small Business Services (SBS), in conjunction with the New York Business Development Corporation (NYBDC), have established a NYC Construction Loan pilot program to provide prime contractors and subcontractors financing for mobilization costs on certain City construction projects.

Under this initiative, loans are available for early stage mobilization needs such as insurance, labor, supplies and equipment. Bidders are strongly encouraged to visit “Growing Your Business” at www.nyc.gov/nycbusiness to learn more about the loan or contact constructionloan@sbs.nyc.gov / (212) 513-6444 to obtain details and to determine preliminary eligibility.

A successful loan applicant will be required to make an assignment of its contract (or subcontract) payments to the lender NYBDC until the loan is repaid. If the loan is to a subcontractor, a prime contractor must honor the terms of such an assignment.

A prime contractor may not discriminate against a subcontractor or potential subcontractor by reason of the subcontractor’s participation, or nonparticipation, in the NYC Construction Loan program.

PROJECT ID: PV467-STG

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

BID BOOKLET

TABLE OF CONTENTS

PART A		page
1.	Special Notice to Bidders.....	2
2.	M/WBE Program: M/WBE Utilization Plan.....	5
3.	Apprenticeship Program Requirements.....	10
4.	Bid Form.....	12
5.	Affirmation.....	17
6.	Bidder's Identification of Subcontractors.....	18
7.	Bid Bond.....	20
8.	Contractor's Bid Breakdown	23
9.	Attachment 1 - Bid Information.....	24
 PART B		
10.	Safety Questionnaire.....	25
11.	Pre-Award Process	28
12.	Project Reference Form.....	30
13.	Contract Certificate.....	33
14.	Confirmation of Vendex Compliance.....	34
15.	Iran Divestment Act Compliance Report.....	35
16.	Construction Employment Report.....	37

**CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

SPECIAL NOTICE TO BIDDERS

BID SUBMISSION REQUIREMENTS

THE BID SHALL CONSIST OF TWO (2) SEPARATE, SEALED ENVELOPES. THE DOCUMENTS THAT MUST BE COMPLETED AND INCLUDED IN EACH SEPARATE ENVELOPE ARE LISTED BELOW.

BID ENVELOPE #1: Bid Envelope #1 shall contain the following items:

- Bid Form, including Affirmation
- Bid Security (if required, see page 24)
- Schedule B: M/WBE Utilization Plan (if participation goals have been established)

BID ENVELOPE #2: Bid Envelope #2 shall contain **ONLY** the following item:

- Bidder's Identification of Subcontractors (see pages 18 & 19)

**FAILURE TO SUBMIT THE FOUR ITEMS LISTED ABOVE
WILL RESULT IN THE DISQUALIFICATION OF THE BID**

BID ENVELOPE #1: In addition to the items listed above, Bid Envelope #1 shall also contain the following items: **DO NOT** Include the items listed below in Bid Envelope #2.

- Bid Breakdown (if required, see page 23)
- Safety Questionnaire
- Construction Employment Report (if bid is \$1,000,000 or more)
- Contract Certificate (if bid is less than \$1,000,000)
- Confirmation of Vendex Compliance
- Bidder's Certification of Compliance with Iran Divestment Act
- Special Experience Requirements Qualification Form (if required, see pages 3, 4)
- Apprenticeship Program Requirements (if required, see pages 10, 11)
- Any Addenda issued prior to the receipt of bids

**FAILURE TO SUBMIT THE NINE ITEMS LISTED ABOVE
MAY RESULT IN THE DISQUALIFICATION OF THE BID.**

- NOTES:**
- (1) All of the above referred to blank forms to be completed and submitted with the bid are included in the BID BOOKLET.
 - (2) If the bidder has any questions or requires additional information, please contact the Department of Design and Construction by phone (718-391-2601) or by fax (718-391-2615).
 - (3) **VENDEX QUESTIONNAIRES:** Vendex Questionnaires, as well as detailed instructions, may be obtained at www.nyc.gov/vendex. The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.
 - (4) **SPECIAL EXPERIENCE REQUIREMENTS:** The Bidder is advised that Special Experience Requirements may apply to this contract. Such requirements are set forth on pages 3 and 4 of this Bid Booklet.
 - (5) **SPECIAL EXPERIENCE REQUIREMENTS FOR ASBESTOS:** The Bidder is advised that this contract contains strict requirements regarding the prior experience and licensing of the subcontractor who will perform any required asbestos abatement work. These special experience requirements are set forth in the section of the specifications which describes any required asbestos abatement work.

SPECIAL EXPERIENCE REQUIREMENTS

Special Experience Requirements apply as indicated below.

Bidder:	General Construction	<u> X </u>	YES	<u> </u>	NO
Specific Areas of Work:	General Construction	<u> X </u>	YES	<u> </u>	NO

(A) **EXPERIENCE REQUIREMENTS FOR THE BIDDER:** The special experience requirements set forth below apply to the bidder indicated above. Compliance with such special experience requirements will be determined solely by the City prior to an award of contract. Failure to comply with the special experience requirements will result in the rejection of the bid as non-responsive.

- The bidder must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.

(B) **QUALIFICATION FORM:** For each project submitted to demonstrate compliance with the special experience requirements, the bidder must complete the Qualification Form included in the Bid Booklet. The City will only evaluate a project if the following criteria are met: (1) the project is described on the Qualification Form, and (2) all information on the Qualification Form is provided. The City will not evaluate any project which does not comply with the criteria set forth herein, including any project which is referred to only on the resume of an individual.

(C) **CONDITIONS:** The City may, in determining compliance with the special experience requirements set forth above, consider prior projects completed by principal(s) or other employees of the bidder while affiliated with another entity, subject to the conditions set forth below.

- Any principal or other employee on whose prior experience the bidder is relying to demonstrate compliance with this special experience requirement must have held the following: (a) a significant management role in the prior entity with which he/she was affiliated, and (b) a significant management role in the entity submitting the bid for a period of six months or from the inception of the bidding entity. If the bidder is relying on the prior experience of a principal or employee, it must submit documentation confirming the position held by such principal or employee in the prior entity, as well as in the bidding entity.
- The bidder may not rely on the experience of its principals or other employees to demonstrate compliance with any other requirements, including without limitation, financial requirements or requirements for a specified minimum amount of annual gross revenues.

(D) **JOINT VENTURES:** In the event the bidder is a joint venture, at least one firm in the joint venture must meet the above described experience requirements.

(E) **EXPERIENCE REQUIREMENTS FOR SPECIFIC AREAS OF WORK:** The special experience requirements set forth below apply to the contractor or subcontractor that will perform specific areas of work. Compliance with such experience requirements will be evaluated after an award of contract. Within two (2) weeks of such award, the contractor will be required to submit the qualifications of the contractor or subcontractor that will perform these specific areas of work. If the bidder intends to perform these specific areas of work with its own forces, it must demonstrate compliance with the special experience requirements. If the bidder intends to subcontract these specific areas of work, its proposed subcontractor(s) must demonstrate compliance with the special experience requirements. Once approved, no substitution will be permitted, unless the qualifications of the proposed replacement have been approved in writing in advance by the City. The bidder is advised to carefully review these special experience requirements prior to submitting its bid, as such experience requirements will be strictly enforced.

- (1) Special experience requirements apply to the contractor or subcontractor that will perform specific areas

of work specified in the section(s) set forth below.

General Construction

- Section 051200: Structural Steel
- Section 055000: Metal Fabrications
- Section 116133: Stage Rigging

(2) Special experience requirements applicable to the contractor or subcontractor that will perform specific areas of work are summarized below. Such experience requirements are set forth in full in the Addendum to the General Conditions.

- The contractor or subcontractor performing the work of this section must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.

(3) For each project submitted to demonstrate compliance with the special experience requirements for specific areas of work, the contractor or proposed subcontractor will be required to complete the Qualification Form included in the Bid Booklet. The City will only evaluate a project if the following criteria are met: (1) the project is described on the Qualification Form, and (2) all information on the Qualification Form is provided. The City will not evaluate any project which does not comply with the criteria set forth herein, including any project which is referred to only on the resume of an individual.

Qualification Form

Project ID: PV467-STG

List previous projects completed to meet the special experience requirements for this contract. Please photocopy this form for submission of all required projects.

Name of Contractor: _____

Name of Project: _____

Location of Project: _____

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: _____

Title: _____ Phone Number: _____

Brief description of work completed: _____

Was the work performed as a prime or a subcontractor: _____

Amount of Contract: _____

Date of Completion: _____

Name of Contractor: _____

Name of Project: _____

Location of Project: _____

Owner or Owner's representative (Architect or Engineer) who is familiar with the work performed:

Name: _____

Title: _____ Phone Number: _____

Brief description of work completed: _____

Was the work performed as a prime or a subcontractor: _____

Amount of Contract: _____

Date of Completion: _____

THIS PAGE INTENTIONALLY LEFT BLANK

MWBE PROGRAM

M/WBE UTILIZATION PLAN

M/WBE Program Requirements: The requirements for the M/WBE Program are set forth on the following pages of this Bid Booklet, in the section entitled “Notice to All Prospective Contractors”.

Schedule B: M/WBE Utilization Plan: Schedule B: M/WBE Utilization Plan for this Contract is set forth in this Bid Booklet on the pages following the section entitled “Notice to All Prospective Contractors”. The M/WBE Utilization Plan (Part I) indicates whether Participation Goals have been established for this Contract. If Participation Goals have been established for this Contract, the bidder must submit an M/WBE Utilization Plan (Part II) with its bid.

Waiver: The bidder may seek a full or partial pre-award waiver of the Participation Goals in accordance with the “Notice to All Prospective Contractors” (See Part A, Section 10). The bidder’s request for a waiver must be submitted at least seven (7) calendar days prior to the bid date. Waiver requests submitted after the deadline will not be considered. The form for requesting a waiver of the Participation Goals is set forth in the M/WBE Utilization Plan (Part III).

Rejection of the Bid: The bidder must complete Schedule B: M/WBE Utilization Plan (Part II) set forth in this Bid Booklet on the pages following the section entitled “Notice to All Prospective Contractors”. A Schedule B submitted by the bidder which does not include the Vendor Certification and Required Affirmations (See Section V of Part II) will be deemed to be non-responsive, unless a full waiver of the Participation Goals is granted (Schedule B, Part III). In the event that the City determines that the bidder has submitted a Schedule B where the Vendor Certification and Required Affirmations are completed but other aspects of the Schedule B are not complete, or contain a copy or computation error that is at odds with the Vendor Certification and Required Affirmations, the bidder will be notified by the Agency and will be given four (4) calendar days from receipt of notification to cure the specified deficiencies and return a completed Schedule B to the Agency. Failure to do so will result in a determination that the Bid is non-responsive.

Receipt of notification is defined as the date notice is emailed or faxed (if the bidder has provided an email address or fax number), or no later than five (5) days from the date of mailing or upon delivery, if delivered.

Impact on LBE Requirements: If Participation Goals have been established for the participation of M/WBEs, the contractor is not required to comply with the Locally Based Enterprise Program (“LBE”). The LBE Program is set forth in Article 67 of the Contract.

THIS PAGE INTENTIONALLY LEFT BLANK

NOTICE TO ALL PROSPECTIVE CONTRACTORS

PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS
ENTERPRISES IN CITY PROCUREMENT

ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD
AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The **MBE and/or WBE Participation Goals** established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The **Participation Goals** represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If **Participation Goals** have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the **Participation Goals**, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to

determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed non-responsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multi-year contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or**

below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an **M/WBE** Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to, the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's **M/WBE** Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its **M/WBE** Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an **M/WBE** Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its **M/WBE** Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at poped@ddc.nyc.gov or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the Participation Goals to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the Participation Goals. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. Modification of M/WBE Utilization Plan. (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission. The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the Participation Goals. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;
- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of an **M/WBE** Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the **M/WBE** Utilization Plan.
2. Pursuant to DSBS rules, construction contracts that include a requirement for an **M/WBE** Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.
3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.
4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).
5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.
2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any **M/WBE** Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.
3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any **M/WBE** Utilization Plan, Agency may determine that one of the following actions should be taken:
 - (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
 - (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
 - (c) making a finding that the Contractor is in default of the Contract;
 - (d) terminating the Contract;
 - (e) declaring the Contractor to be in breach of Contract;
 - (f) withholding payment or reimbursement;
 - (g) determining not to renew the Contract;
 - (h) assessing actual and consequential damages;

- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an **M/WBE** Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its **M/WBE** Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.

5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.

7. The Contractor's record in implementing its **M/WBE** Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an **M/WBE** Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

THIS PAGE INTENTIONALLY LEFT BLANK

Tax ID #: _____

APT E-
PIN#: 85014B0147

Contract # 1 - General Construction Work

SCHEDULE B - M/WBE Utilization Plan

Part I: M/WBE Participation Goals

Part I to be completed by contracting agency

Contract Overview

APT E-Pin # 85014B0147 FMS Project ID#: PV467-STG

Project Title/Agency St. George Theatre Stage Rigging Replacement

PIN # 8502014PV0014C

Bid/Proposal
Response Date: WEDNESDAY, JULY 2ND, 2014

Contracting Agency Department of Design and Construction

Agency Address 30-30 Thomson Avenue City Long Island City State NY Zip Code 11101

Contact Person Norma Negrón Title MWBE Liaison & Compliance Analyst

Telephone # (718) 391-1502 Email negronn@ddc.nyc.gov

Project Description (attach additional pages if necessary)

This Project consists of removal and replacement of the existing stage rigging system, including structural reinforcement and partial replacement of the existing stage gridiron and roof structure; replacement of the rigging loading gallery; and a new ship's ladder for access from the stage floor to the gridiron. Work also includes removal and replacement of branch sprinkler piping at the gridiron, and new work lighting.

M/WBE Participation Goals for Services

Enter the percentage amount for each group or for an unspecified goal. Please note that there are no goals for Asian Americans in Professional Services

Prime Contract Industry: Construction

Group	Percentage
<u>Unspecified *</u>	<u>3 %</u>
or	
<u>Black American</u>	<u>Unspecified %</u>
<u>Hispanic American</u>	<u>Unspecified %</u>
<u>Asian American</u>	<u>Unspecified %</u>
<u>Women</u>	<u>Unspecified %</u>
Total Participation Goals	3 %

Line 1

* Note: For this procurement, individual ethnicity and gender goals are not specified. The Total Participation Goals for construction contracts may be met by using Black American, Hispanic American, Asian American or Women certified firms or any combination of such firms.

Tax ID #: _____

APT E-

PIN#: 85014B0147

SCHEDULE B - Part II: M/WBE Participation Plan

Part II to be completed by the bidder/proposer:

Please note: For Non-M/WBE Prime Contractors who will NOT subcontract any services and will self-perform the entire contract, you must obtain a FULL waiver by completing the Waiver Application on pages 9 and 9a and timely submitting it to the contracting agency pursuant to the Notice to Prospective Contractors. Once a FULL WAIVER is granted, it must be included with your bid or proposal and you do not have to complete or submit this form with your bid or proposal.

Section I: Prime Contractor Contact Information	
Tax ID # _____	FMS Vendor ID # _____
Business Name _____	Contact Person _____
Address _____	
Telephone # _____	Email _____

Section II: M/WBE Utilization Goal Calculation: Check the applicable box and complete subsection.

PRIME CONTRACTOR ADOPTING AGENCY M/WBE PARTICIPATION GOALS				
<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Agency M/WBE Participation Goals. Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	Total Bid/Proposal Value		Agency Total Participation Goals (Line 1, Page 6)	Calculated M/WBE Participation Amount
	\$	X	=	\$ Line 2
PRIME CONTRACTOR OBTAINED PARTIAL WAIVER APPROVAL: ADOPTING MODIFIED M/WBE PARTICIPATION GOALS				
<input type="checkbox"/> For Prime Contractors (including Qualified Joint Ventures and M/WBE firms) adopting Modified M/WBE Participation Goals. Calculate the total dollar value of your total bid that you agree will be awarded to M/WBE subcontractors for services and/or credited to an M/WBE prime contractor or Qualified Joint Venture. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation.	Total Bid/Proposal Value		Adjusted Participation Goal (From Partial Waiver)	Calculated M/WBE Participation Amount
	\$	X	=	\$ Line 3

Section III: M/WBE Utilization Plan: How Proposer/Bidder Will Fulfill M/WBE Participation Goals. Please review the Notice to Prospective Contractors for more information on how to obtain credit for M/WBE participation. Check applicable box. The Proposer or Bidder will fulfill the M/WBE Participation Goals:

As an M/WBE Prime Contractor that will self-perform and/or subcontract to other M/WBE firms a portion of the contract the value of which is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non-M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals. Please check all that apply to Prime Contractor:
 MBE WBE

As a Qualified Joint Venture with an M/WBE partner, in which the value of the M/WBE partner's participation and/or the value of any work subcontracted to other M/WBE firms is at least the amount located on Lines 2 or 3 above, as applicable. The value of any work subcontracted to non M/WBE firms will not be credited towards fulfillment of M/WBE Participation Goals.

As a non M/WBE Prime Contractor that will enter into subcontracts with M/WBE firms the value of which is at least the amount located on Lines 2 or 3 above, as applicable.

Section IV: General Contract Information

What is the expected percentage of the total contract dollar value that you expect to award in subcontracts for services, regardless of M/WBE status? % _____

Enter brief description of the type(s) and dollar value of subcontracts for all any services you plan on subcontracting if awarded this contract. For each item, indicate whether the work is designated for participation by MBEs and/or WBEs and the time frame in which such work is scheduled to begin and end. Use additional sheets if necessary.

- 1. _____
- 2. _____
- 3. _____
- 4. _____
- 5. _____
- 6. _____
- 7. _____
- 8. _____
- 9. _____
- 10. _____
- 11. _____
- 12. _____
- 13. _____
- 14. _____
- 15. _____
- 16. _____
- 17. _____

✓ Scopes of Subcontract Work

Section V: Vendor Certification and Required Affirmations

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth herein and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York (Section 6-129), and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of this M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

Signature _____

Date _____

Print Name _____

Title _____

SCHEDULE B – PART III – REQUEST FOR WAIVER OF M/WBE PARTICIPATION REQUIREMENT

Contract Overview

Tax ID # _____ FMS Vendor ID # _____
 Business Name _____
 Contact Name _____ Telephone # _____ Email _____
 Type of Procurement Competitive Sealed Bids Other Bid/Response Due Date _____
 APT E-PIN # (for this procurement): _____ Contracting Agency: _____

M/WBE Participation Goals as described in bid/solicitation documents

_____ % Agency M/WBE Participation Goal

Proposed M/WBE Participation Goal as anticipated by vendor seeking waiver

_____ % of the total contract value anticipated **in good faith** by the bidder/proposer to be subcontracted for services and/or credited to an M/WBE Prime Contractor or Qualified Joint Venture.

Basis for Waiver Request: Check appropriate box & explain in detail below (attach additional pages if needed)

- Vendor does not subcontract services, and has the capacity and good faith intention to perform all such work itself with its own employees.
- Vendor subcontracts *some* of this type of work but at a *lower* % than bid/solicitation describes, and has the capacity and good faith intention to do so on this contract. (Attach subcontracting plan outlining services that the vendor will self-perform and subcontract to other vendors or consultants.)
- Vendor has other legitimate business reasons for proposing the M/WBE Participation Goal above. Explain under separate cover.

References

List 3 most recent contracts performed for NYC agencies (if any). Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____
CONTRACT NO.	AGENCY	DATE COMPLETED
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

List 3 most recent contracts performed for other entities. Include information for each subcontract awarded in performance of such contracts. Add more pages if necessary.

(Complete ONLY if vendor has performed fewer than 3 New York City contracts.)

TYPE OF Contract _____	ENTITY _____	DATE COMPLETED _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Type of Work Subcontracted _____	_____	_____

TYPE OF Contract _____	AGENCY/ENTITY _____	DATE COMPLETED _____
Manager at agency/entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

TYPE OF Contract _____	AGENCY/ENTITY _____	DATE COMPLETED _____
Manager at entity that hired vendor (Name/Phone No./Email) _____		
Total Contract Amount \$ _____	Total Amount Subcontracted \$ _____	_____
Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____	Item of Work Subcontracted and Value of subcontract _____

VENDOR CERTIFICATION: I hereby affirm that the information supplied in support of this waiver request is true and correct, and that this request is made in good faith.

Signature: _____ **Date:** _____
Print Name: _____ **Title:** _____

Shaded area below is for agency completion only.

AGENCY CHIEF CONTRACTING OFFICER APPROVAL
Signature: _____ **Date:** _____

CITY CHIEF PROCUREMENT OFFICER APPROVAL
Signature: _____ **Date:** _____

Waiver Determination

Full Waiver Approved:
 Waiver Denied:
 Partial Waiver Approved:
 Revised Participation Goal: _____ %

APPRENTICESHIP PROGRAM REQUIREMENTS

Bidders are advised that the Apprenticeship Program Requirements set forth below apply to each contract for which a check mark is indicated before the word "Yes". Compliance with these requirements will be determined solely by the City.

General Construction YES x NO

* Note: Even if Yes is marked, the Exemption set forth below may apply.

1) Apprenticeship Program Requirements

NOTICE TO BIDDERS: Please be advised that, pursuant to the authority granted to the City under Labor Law Section 816-b, the Department of Design and Construction hereby requires that the contractor awarded a contract as a result of this Invitation for Bids, and any of its subcontractors with subcontracts worth one million dollars or over, have, prior to entering into such contract or subcontract, apprenticeship agreements appropriate for the type and scope of work to be performed that have been registered with, and approved by, the New York State Commissioner of Labor. In addition, the contractor and its subcontractors will be required to show that such apprenticeship programs have three years of current, successful experience in providing career opportunities.

The failure to prove, upon request, that these requirements have been met shall result in the contract not being awarded to the contractor or the subcontract not being approved.

Please be further advised that, pursuant to Labor Law Section 220, the allowable ratio of apprentices to journeypersons in any craft classification shall not be greater than the ratio permitted to the contractor as to its workforce on any job under the registered

2) Apprenticeship Program Questionnaire

The bidder must submit a completed and signed Apprenticeship Program Questionnaire, unless it qualifies for the exemption set forth below. The Questionnaire is set forth on the

3) Exemption

Bidders for the General Construction Contract are advised that the exemption set forth below applies if an "X" is indicated before the word "Yes".

YES

NO

Exemption: If the bidder intends to subcontract 100% of the construction work, it is not required to demonstrate that it has an Apprenticeship Agreement(s), nor is it required to submit an Apprenticeship Program Questionnaire. If the bidder qualifies for this exemption, it shall submit a letter stating that it intends to subcontract 100% of the construction work. As indicated above, the Apprenticeship Program Requirements apply to subcontracts worth one million dollars or more.

APPRENTICESHIP PROGRAM QUESTIONNAIRE

PROJECT ID: PV467-STG

The bidder must submit a completed and signed Apprenticeship Program Questionnaire unless it qualifies for the exemption set forth on the previous page.

Name of Bidder: _____

1) Does the bidder have an Apprenticeship Program appropriate for the type and scope of work to be performed? [Note: Participation may be by either direct sponsorship or through collective bargaining agreement(s).]

_____ YES _____ NO

2) Has the bidder's Apprenticeship Program been registered with, and approved by, the New York State Commissioner of Labor?

_____ YES _____ NO

3) Has the bidder's Apprenticeship Program had three years of successful experience in providing career opportunities?

_____ YES _____ NO

If the answer to Question #3 is "Yes", the bidder shall, in the space below, provide information regarding the experience the Apprenticeship Program has had in providing career opportunities. The bidder may attach additional pages if necessary.

Bidder: _____

By: _____
(Signature of Partner or Corporate Officer)

Title: _____

Date: _____

**BID FORM
THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

**BID FOR FURNISHING ALL LABOR AND
MATERIAL NECESSARY AND REQUIRED FOR:**

PROJECT ID: PV467-STG

**St. George Theater Stage Rigging Replacement
35 Hyatt Street
Staten Island 10301**

Name of Bidder: _____

Date of Bid Opening: _____

Bidder is: (Check one, whichever applies) Individual () Partnership () Corporation ()

Place of Business of Bidder: _____

Bidder's Telephone Number: _____ Bidder's Fax Number: _____

Bidder's Email Address: _____

Residence of Bidder (If Individual): _____

If Bidder is a Partnership, fill in the following blanks:

Names of Partners

Residence of Partners

If Bidder is a Corporation, fill in the following blanks:

Organized under the laws of the State of _____

Name and Home Address of President: _____

Name and Home Address of Secretary: _____

Name and Home Address of Treasurer: _____

THIS PAGE INTENTIONALLY LEFT BLANK

BID FORM

The above-named Bidder affirms and declares:

1. The said bidder is of lawful age and the only one interested in this bid; and no person, firm or corporation other than hereinbefore named has any interest in this bid, or in the Contract proposed to be taken.
2. By submission of this bid, each bidder and each person signing on behalf of any bidder certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief: (1) the prices in this bid have been arrived at independently without collusion, consultation, communication or agreement, for the purpose of restricting competition, as to any matter relating to such prices with any other bidder or with any competitor; (2) unless otherwise required by law, the prices quoted in this bid have not been knowingly disclosed by the bidder and will not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor; and (3) no attempt has been made or will be made by the bidder to induce any other person, partnership or corporation to submit or not to submit a bid for the purpose of restricting competition.
3. No councilman or other officer or employee or person whose salary is payable in whole or in part from the City Treasury is directly or indirectly interested in this bid, or in the supplies, materials, equipment, work or labor to which it relates, or in any of the profits thereof.
4. The bidder is not in arrears to the City of New York upon debt or contract or taxes, and is not a defaulter, as surety or otherwise, upon any obligation of the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York or State of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except as set forth on the Affirmation included as page 17 of this Bid Booklet.

The bidder hereby affirms that is has paid all applicable City income, excise and other taxes for all years it has conducted business activities in New York City.

5. The bidder, as an individual, or as a member, partner, director or officer of the bidder, if the same be a firm, partnership or corporation, executes this document expressly warranting and representing that should this bid be accepted by the City and the Contract awarded to him, he and his subcontractors engaged in the performance: (1) will comply with the provisions of Section 6-108 of the Administrative Code of the City of New York and the non-discrimination provisions of Section 220a of the New York State Labor Law, as more expressly and in detail set forth in the Agreement; (2) will comply with Section 6-109 of the Administrative Code of the City of New York in relation to minimum wages and other stipulations as more expressly and in detail set forth in the Agreement; (3) have complied with the provisions of the aforesaid laws since their respective effective dates, and (4) will post notices to be furnished by the City, setting forth the requirements of the aforesaid laws in prominent and conspicuous places in each and every plant, factory, building and structure where employees engaged in the performance of the Contract can readily view it, and will continue to keep such notices posted until the supplies, materials and equipment, or work labor and services required to be furnished or rendered by the Contractor have been finally accepted by the City. In the event of any breach or violation of the foregoing, the Contractor may be subject to damages, liquidated or otherwise, cancellation of the Contract and suspension as a bidder for a period of three years. (The words, "the bidder", "he", "his", and "him" where used shall mean the individual bidder, firm, partnership or corporation executing this bid).

6. Compliance Report

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, (1) represents that his attention has been specifically drawn to Executive Order No. 50, dated April 25, 1980, on Equal Employment Compliance of the contract, and (2) warrants that he will comply with the provisions of Executive Order No. 50. The Employment Report must be submitted as part of the bid.

The bidder, as an individual, or as a member, partner, director, or officer of the bidder, if the same be a firm, partnership, or corporation, executes this document expressly warranting that he will comply with: (1) the provision of the contract on providing records, Chapter 8.

7. By submission of this bid, the bidder certifies that it now has and will continue to have the financial capability to fully perform the work required for this contract. Any award of this contract will be made in reliance upon such certification. Upon request therefor, the bidder will submit written verification of such financial capability in a form that is acceptable to the department.

8. In accordance with Section 165 of the State Finance Law, the bidder agrees that tropical hardwoods, as defined in Section 165 of the State Finance Law, shall not be utilized in the performance of this Contract, except as the same are permitted by the foregoing provision of law.

9. The bidder has visited and examined the site of the work and has carefully examined the Contract in the form approved by the Corporation Counsel, and will execute the Contract and perform all its items, covenants and conditions, and will provide, furnish and deliver all the work, materials, supplies, tools and appliances for all labor and materials necessary or required for the hereinafter named work, all in strict conformity with the Contract, for the prices set forth in the Bid Schedule:

Section V: Vendor Certification and Required Affirmations:

I hereby:

- 1) acknowledge my understanding of the M/WBE participation requirements as set forth in this Contract and the pertinent provisions of Section 6-129 of the Administrative Code of the City of New York and the rules promulgated thereunder;
- 2) affirm that the information supplied in support of the M/WBE Utilization Plan is true and correct;
- 3) agree, if awarded this Contract, to comply with the M/WBE participation requirements of this Contract, the pertinent provisions of Section 6-129, and the rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract;
- 4) agree and affirm that it is a material term of this Contract that the Vendor will award the total dollar value of the M/WBE Participation Goals to certified MBEs and/or WBEs, unless a full waiver is obtained or such goals are modified by the Agency; and
- 5) agree and affirm, if awarded this Contract, to make all reasonable, good faith efforts to meet the M/WBE Participation Goals, or If a partial waiver is obtained or such goals are modified by the Agency, to meet the modified Participation Goals by soliciting and obtaining the participation of certified MBE and/or WBE firms.

BID FORM

PROJECT ID: PV467-STG

TOTAL BID PRICE: In the space provided below, the Bidder shall indicate the total bid price in figures.

- A. **LUMP SUM PRICE** - Total price for all labor and material for all required work, excluding item (B) set forth below. Total Price shall include all costs and expenses, i.e. labor, material overhead and profit for all the Work, described and shown in the drawings and specifications.

Total Price For
Labor

Total Price for Material Sold and
Delivered

\$ _____ +

\$ _____

Total Price for Item A= \$ _____

- B. **ALLOWANCE** for Incidental Asbestos Abatement
(Section 028013 of the Specifications)

\$15,000.00

TOTAL BID PRICE (Add A + B)
(a/k/a BID PROPOSAL)

\$ _____

BIDDER'S SIGNATURE AND AFFIDAVIT

*** SUBCONTRACTOR IDENTIFICATION: You MUST complete and submit the form entitled "Bidder's Identification of Subcontractors" (page 19) at the time you submit your bid. You must submit this form in a separate, sealed envelope (BID ENVELOPE #2). In the event an award of contract is not made to the Bidder, the Bidder hereby authorizes the Agency to shred the form entitled "Bidder's Identification of Subcontractors". _____ Yes _____ No**

Bidder: _____

By: _____
(Signature of Partner or corporate officer)

Attest:
(Corporate Seal)

Secretary of Corporate Bidder

Affidavit on the following page should be subscribed and sworn to before a Notary Public

THIS PAGE INTENTIONALLY LEFT BLANK

BID FORM (TO BE NOTARIZED)

AFFIDAVIT WHERE BIDDERS IS AN INDIVIDUAL

STATE OF NEW YORK, COUNTY OF _____ ss:

_____ being duly sworn says:

I am the person described in and who executed the foregoing bid, and the several matters therein stated are in all respects true.

(Signature of the person who signed the Bid)

Subscribed and sworn to before me this
_____ day of _____,

Notary Public

AFFIDAVIT WHERE BIDDERS IS A PARTNERSHIP

STATE OF NEW YORK, COUNTY OF _____ ss:

_____ being duly sworn says:

I am a member of _____ the firm described in and which executed the foregoing bid. subscribed the name of the firm thereto on behalf of the firm, and the several matters therein stated are in all respects true.

(Signature of Partner who signed the Bid)

Subscribed and sworn to before me this
_____ day of _____,

Notary Public

AFFIDAVIT WHERE BIDDERS IS A CORPORATION

STATE OF NEW YORK, COUNTY OF _____ ss:

_____ being duly sworn says:

I am the _____ of the above named corporation whose name is subscribed to and which executed the foregoing bid. I reside at _____.

I have knowledge of the several matters therein stated, and they are in all respects true.

(Signature of Corporate Officer who signed the Bid)

Subscribed and sworn to before me this
_____ day of _____,

Notary Public

AFFIRMATION

The undersigned bidder affirms and declares that said bidder is not in arrears to the City of New York upon debt, contract or taxes and is not a defaulter, as surety or otherwise, upon obligation to the City of New York, and has not been declared not responsible, or disqualified, by any agency of the City of New York, nor is there any proceeding pending relating to the responsibility or qualification of the bidder to receive public contracts except _____

(If none, the bidder shall insert the word "None" in the space provided above.)

Full Name of Bidder: _____

Address: _____

City: _____ State: _____ Zip Code: _____

CHECK ONE BOX AND INCLUDE APPROPRIATE NUMBER:

A - Individual or Sole Proprietorship *
SOCIAL SECURITY NUMBER

B - Partnership, Joint Venture or other unincorporated organization
EMPLOYER IDENTIFICATION NUMBER

C - Corporation
EMPLOYER IDENTIFICATION NUMBER

By: _____
Signature:

Title: _____

If a corporation, place seal here

This affirmation must be signed by an officer or duly authorized representative.

* Under the Federal Privacy Act the furnishing of Social Security Numbers by bidders on City contracts is voluntary. Failure to provide a Social Security Number will not result in a bidder's disqualification. Social Security Numbers will be used to identify bidders, proposers or vendors to ensure their compliance with laws, to assist the City in enforcement of laws, as well as to provide the City a means of identifying of businesses which seek City contracts.

BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

NOTICE TO BIDDERS

SUBMISSION: The Bidder must, at the time of the bid, submit the form on the next page ("BIDDER'S IDENTIFICATION OF SUBCONTRACTORS"). This form must be submitted in a separate, sealed envelope (BID ENVELOPE #2). Failure to do so will result in the disqualification of the bid as non-responsive.

Please be advised that pursuant to GML § 101(5) the Bidder is required to submit with its bid the names of subcontractors it intends to use to perform the following work on this contract, as well as the agreed-upon amount to be paid to each:

- plumbing and gas fitting;
- steam heating, hot water heating, ventilating and air conditioning apparatus; and
- electric wiring and standard illuminating fixtures.

NOTE: This project may not involve all of the above listed subcontractors. Please see the form on the next page which indicates the subcontractors required for this Project.

The list of subcontractors is to be submitted in a separate sealed envelope by completing the form on the next page entitled "Bidder's Identification of Subcontractors". This form provides for the identification of any subcontractors intended to be used in any of the three trades listed above. If bidder intends to use its own forces for any of the above listed work, bidder should so indicate on the form.

Failure to submit the completed form on the next page ("Bidder's Identification of Subcontractors") that includes the names of subcontractors and the agreed upon amounts to be paid to such subcontractors will render the bid non-responsive.

PLEASE NOTE: for any contract that is subject to M/WBE Participation Goals under Section 6-129 of the Administrative Code of the City of New York, if the bidder's intention to use its own forces to do any of the above-referenced work would result in Bidder's failure to attain the Participation Goals identified in the M/WBE Utilization Plan, the bid will be non-responsive unless the bidder requests and obtains a full or partial waiver of the Participation Goals (M/WBE Utilization Plan, Part III) in advance of bid submission. For more information see Notice to All Prospective Contractors, Participation by Minority-Owned and Women-Owned Business Enterprises in City Procurement.

After the low bid is announced, the sealed list submitted by the low bidder will be opened and the names of the subcontractors will be announced. The sealed lists of subcontractors submitted by all other bidders shall be maintained by the Agency unopened unless such bidder shall become the low bidder (e.g., the initial low bidder is found non-responsive). All unopened lists of subcontractors shall be returned to the bidders unopened after contract award, unless the bidder has given the agency permission to shred the form.

After bid submission, any change of subcontractor or agreed-upon amount to be paid to each shall require approval of the Agency upon a showing of a legitimate construction need which shall include, but not be limited to, a change in project specifications, a change in project material costs, a change to subcontractor status as determined pursuant to §222 (2)(e) of the Labor Law, or if the subcontractor has become otherwise unwilling, unable or unavailable to perform the subcontract.

Please note that the Agency will not award this contract for an amount greater than \$3 million.

BIDDER'S IDENTIFICATION OF SUBCONTRACTORS

Project ID: PV467-STG

SUBMISSION: In addition to its Bid (Bid Envelope # 1), the Bidder must, at the time of the bid, complete and submit this form in a separate, sealed envelope (Bid Envelope # 2). To complete this form, the Bidder must identify the subcontractors it intends to use for the work listed below, as well as the dollar amount to be paid to each subcontractor. Failure to complete this form and submit it in a separate, sealed envelope will result in the disqualification of the bid as non-responsive.

The Bidder intends to use the following subcontractors. If the Bidder intends to do any of the work referenced below with its own forces, the Bidder should complete this form using its own name. If multiple subcontractors for any trade are proposed, Bidder may submit multiple copies of this form.

1. **HVAC CONTRACTOR:**

(Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ _____

2. **ELECTRICAL CONTRACTOR:**

(Print Name)

Agreed Amount To Be Paid To Subcontractor: \$ _____

BIDDER'S SIGNATURE: The Bidder must sign this form in the space provided below:

Name of Bidder: _____

By: _____
Signature of Partner or Corporate Officer

Print Name: _____

Title: _____

BID BOND 1
FORM OF BID BOND

KNOW ALL MEN BY THESE PRESENTS. That we, _____

hereinafter referred to as the "Principal", and _____

hereinafter referred to as the "Surety" are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "CITY", or to its successors and assigns in the penal sum of _____

(\$ _____), Dollars lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

Whereas, the Principal is about to submit (or has submitted) to the City the accompanying proposal, hereby made a part hereof, to enter into a contract in writing for _____

NOW, THEREFORE, the conditions of this obligation are such that if the Principal shall not withdraw said Proposal without the consent of the City for a period of forty-five (45) days after the opening of bids and in the event of acceptance of the Principal's Proposal by the City, if the Principal shall:

(a) Within ten (10) days after notification by the City, execute in quadruplicate and deliver to the City all the executed counterparts of the Contract in the form set forth in the Contract Documents, in accordance with the proposal as accepted, and

(b) Furnish a performance bond and separate payment bond, as may be required by the City, for the faithful performance and proper fulfillment of such Contract, which bonds shall be satisfactory in all respects to the City and shall be executed by good and sufficient sureties, and

(c) In all respects perform the agreement created by the acceptance of said Proposal as provided in the Information for Bidders, bound herewith and made a part hereof, or if the City shall reject the aforesaid Proposal, then this obligation shall be null and void; otherwise to remain in full force and effect.

BID BOND 2

In the event that the Proposal of the Principal shall be accepted and the Contract be awarded to him the Surety hereunder agrees subject only to the payment by the Principal of the premium therefore, if requested by the City, to write the aforementioned performance and payment bonds in the form set forth in the Contract Documents.

It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall in no event exceed the penal amount of this obligation as herein stated.

There shall be no liability under this bond if, in the event of the acceptance of the Principal's Proposal by the City, either a performance bond or payment bond, or both, shall not be required by the City on or before the 30th day after the date on which the City signs the Contract.

The surety, for the value received, hereby stipulates and agrees that the obligations of the Surety and its bond shall in no way be impaired or affected by any postponements of the date upon which the City will receive or open bids, or by any extensions of time within which the City may accept the Principal's Proposal, or by any waiver by the City of any of the requirements of the Information for Bidders, and the Surety hereby waives notice of any such postponements, extensions, or waivers.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers the _____ day of _____, _____.

(Seal)

Principal (L.S.)

By: _____

(Seal)

Surety

By: _____



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Client Agency: DCA
 Project ID: PV467-STG

DIVISION 1 - GENERAL REQUIREMENTS									
GENERAL REQUIREMENTS		QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT	
010000	Temporary Facilities and Controls								
010000	Temporary lighting		SF						
1	Temporary protection of stage surface		SF						
2	Temporary protection to existing proscenium		LS						
3	Temporary protection to existing proscenium		LS						
4	Scaffolding at fixed steel ladder installation, 60' high platform		LS						
5	Scaffolding at steel bottom chord installation (60' high platforms, at 2-locations, 3 moves each)		LS						
6	Scaffolding at beam end repair locations		LS						
SUB-TOTAL									

DIVISION 2 - EXISTING CONDITIONS									
DEMOLITION AND STRUCTURE MOVING		QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT	
024000	Selective Demolition and Alteration work								
024119	Remove existing sprinklers and Cut-off and cap sprinkler pipes		EA						
1	Dismantle & dispose of existing ships ladder		LS						
2	Cut concrete & expose steel beams at queen post & hanger locations, dispose of debris (queen post & WT hangers)		LS						
3	Cut existing grid and remove at 4-middle bays (existing C3 x4.1)		SF						
4	Cut existing grid at locations of slot openings		SF						
5	Removal of concrete; Expose beam ends for repair work		EA						
6									
SUB-TOTAL									

DIVISION 4 - MASONRY									
MASONRY		QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT	
040000	Masonry Restoration								
049000	Repairs; 2'x2' brick stitch		EA						
1									
SUB-TOTAL									

THIS PAGE INTENTIONALLY LEFT BLANK



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Client Agency DCA
 Project ID: PV467-STG

DIVISION 5 - METALS									
5	METALS	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT	
050000	METALS								
051200	Structural Steel								
	<i>Re-inforce Rigging Grid Platform</i>								
1	Furnish and install queen posts @ Truss; HSS 10"x4"		TON						
	Furnish and install lateral bracing @ Truss; 4"x4"x3/8" Angle		TON						
2	Furnish and install structural bottom chords @ Truss; W10 x 49		TON						
3	Furnish and install hangers and channel at slots; 1/2" x 6" plate; C8x11.5; 3-slots		TON						
4	Furnish and install grid sub-frame; C7x9.8		TON						
5	Furnish and install grid channel (C3 x 4.1 pcs.)		TON						
6	Miscellaneous steel flanges, angles, brackets		LS						
	<i>Stair Framing</i>								
1	W8x15; W16x26 beams		TON						
2	MC8x22.8; C8x11.5		TON						
3	3"x3"x1/2" Angle		TON						
	<i>Head Block and Loading Gallery</i>								
1	Furnish and install Gallery Frame; HSS 20x12x1/2		TON						
2	Furnish and install Gallery Frame; HSS 8x4x1/2		TON						
3	Furnish and install Gallery Frame; HSS 6x4x5/8		TON						
4	Furnish and install Gallery Frame; HSS 3x3x3/8/ 2x2x1/4		TON						
5	Furnish and install Beam; W8x15		TON						
6	1/4" steel guard plate		TON						
7	1/2" Thick diamond steel plate		TON						
8	Furnish and install Channel; C8x11.5		TON						
9	Miscellaneous steel flanges, angles, brackets		LS						
	<i>Re-inforce Roof Structure</i>								
1	Furnish and install structural steel at roof reinforcing (W10x19; W10x30; W10x39)		TON						
2	Miscellaneous steel plates, gussets, flanges, angles, brackets		LS						
	SUB-TOTAL								

THIS PAGE INTENTIONALLY LEFT BLANK



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

Client Agency DCA
 Project ID: PV467-STG

055000	METAL FABRICATIONS	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
055000	Metal Stairs							
	<i>Fixed Ladder to Rigging Platform</i>							
1	Fixed ladder with 1/4" Diamond plate treads and landing; side railings; Matte black finish		LS					
2	Fixed ladder@ Loading Gallery; mounted vertically		LS					
3	Metal Railings							
	1 1/2" Sch. 40 steel guardrail		LF					
4	Wire mesh@ Guardrail; 0.12 Galvanized woven steel in continuous steel angle frame		SF					
	SUB-TOTAL							

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

078000	FIRE AND SMOKE PROTECTION	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
078123	Intumescent Fireproofing							
1	Intumescent Fireproofing@ new steelwork		SF					
2	Intumescent Fireproofing; Scrape and paint beam ends, connections and bearing plates		EA					
3	Intumescent Fireproofing; Scrape and paint beam ends, connections and truss chord		EA					
4	Intumescent Fireproofing@ existing steel; areas disturbed; allowance		LS					
	SUB-TOTAL							

DIVISION 9 - FINISHES

099000	PAINTING AND FINISHING	QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
099000	Painting							
1	Paint@Head Block and Loading Gallery		LS					
2	Paint@ New Stair, Rail and Frame		LS					
3	Paint@ New Grid Framing		SF					

THIS PAGE INTENTIONALLY LEFT BLANK



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
 Location: 35 Hyatt Street, Staten Island NY 10301
 Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Client Agency: DCA
 Project ID: PV467-STG

4	Paint@ Existing Grid Framing				SF														
5	Touch-up with corrosion prohibitive paint				LS														
SUB-TOTAL																			

DIVISION 11 - EQUIPMENT

EQUIPMENT		QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
110000	Stage Rigging							
116133	Demolition and Removal		LS					
2	Brickhouse type counterweight sets; Stage Rigging		LS					
SUB-TOTAL								

DIVISION 21 - FIRE PROTECTION

FIRE PROTECTION		QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
210000	Common Work Results for Fire Protection							
210000	Seismic Restraints		LS					
5	Start up, incl. total system		LS					
210553	Identification for Fire Suppression Piping and Equipment							
	Identification for Fire Suppression - included with 211313		EA					
211313	Wet-Pipe Sprinkler system							
1	Sprinkler mains piping; Sch 40, grooved; 3" Diameter		LF					
2	(x-Cost) Connections to existing		EA					
3	Sprinkler mains piping; Sch 40, grooved; 2 1/2" Diameter		LF					
4	Sprinkler mains piping; Sch 40, grooved; 2" Diameter		LF					
5	Sprinkler mains piping; Sch 40, grooved; 1 1/2" diameter		LF					
6	Sprinkler mains piping; Sch 40, grooved; 1 1/4" diameter		LF					
7	Sprinkler mains piping; Sch 40, grooved; 1" diameter		LF					
8	Sprinkler Heads, concealed		EA					
SUB-TOTAL								

THIS PAGE INTENTIONALLY LEFT BLANK



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Project: St. George Theater Stage Rigging Replacement
Location: 35 Hyatt Street, Staten Island NY 10301
Bidder:

CONTRACTOR'S BID BREAKDOWN FORM

CONTRACT 1 - GENERAL CONSTRUCTION WORK

Client Agency DCA
Project ID: PV467-STG

DIVISION 26 - ELECTRICAL											
26	ELECTRIC POWER				QUANTITY	UNIT	UNIT MATERIAL	TOTAL MATERIAL	UNIT LABOR	TOTAL LABOR	AMOUNT
260000											
260500	Common Work Results for Electrical										
1	Common Work Results for Electrical - included with 260524										
260510	Basic Electrical Materials and Methods										
1	Basic Electrical Materials and Methods - included with 260524										
260524	Feeders and Branch Circuitry										
1	3/4" Emt, 2#10, #12G					LF					
2	3/4" Emt, 3#10, #12G					LF					
260526	Grounding and Bonding for Electrical Systems										
1	Grounding and Bonding for ES - included with 262726					EA					
260533	Raceways and Boxes for Electrical Systems										
1	Raceways and Boxes for ES- included with 262726					EA					
260553	Identification for Electrical Systems										
1	Identification for Electrical Systems - included with 262726					EA					
260923	Lighting Control Devices										
1	Lighting Control devices - included with 262726					EA					
262726	Wiring Devices										
1	Duplex receptacle					EA					
2	Light switch					EA					
3	Circuit Breakers; 1P-20A					EA					
265100	Interior Lighting										
1	Flourescent Light Fixture; ceiling mount; Cooper lighting					EA					
2	Flourescent Light Fixture; wall mount; Columbia lighting					EA					
3	Wall mounted utility light fixture					EA					
4	Index light;					EA					
SUB-TOTAL											
TOTAL CONTRACT 1 - GENERAL CONSTRUCTION											

THIS PAGE INTENTIONALLY LEFT BLANK

BID BOND 3

ACKNOWLEDGEMENT OF PRINCIPAL, IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally came _____ to me known, who, being by me duly sworn, did depose and say that he resides at _____ that he is the _____ of _____ the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument, and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public

ACKNOWLEDGEMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally appeared _____ to me known and known to me to be the person described in and who executed the foregoing instrument and acknowledged that he executed the same.

Notary Public

AFFIX ACKNOWLEDGEMENTS AND JUSTIFICATION OF SURETIES

THIS PAGE INTENTIONALLY LEFT BLANK

BID BREAKDOWN

Submission: Bidders are advised that the requirement to submit a Bid Breakdown applies to each contract for which an "X" is indicated before the word "Yes". If required, the bidder must submit, with its bid, a completed Bid Breakdown. Failure to provide a completed Bid Breakdown may result in rejection of the bid as non-responsive.

 X YES NO

Limitations on Use of Bid Breakdown:

Bidders are advised that the Bid Breakdown shall be used for bid analysis purposes only and shall not be binding for any other purposes under the Contract, including, without limitation, for payment purposes or in connection with a contractor claim for extra work. If the form for the Bid Breakdown does not include an item of work required by the Contract Documents, such omission shall have no effect whatsoever, nor shall it be used by the contractor in connection with a claim for extra work (i.e., work for which the contractor is entitled to a change order).

Instructions for Preparing Bid Breakdown:

- (A) The Bid Breakdown is set forth on the following pages of this Bid Booklet and is in accordance with the Construction Specification Institute (CSI) format. For all items of work listed in the Bid Breakdown, the bidder must indicate the price for labor and the price for material, as well as the estimated quantities required.
- (B) In preparing its Bid Breakdown, the bidder shall submit prices that include all costs for overhead and profit. Overhead shall include, without limitation, all costs in connection with the following: administration, management, superintendence, small tools, insurance, bonds, and provision of services or items required by the General Conditions [except for Security/Fire Guard Services and Temporary Heat]. If the Project requires Security/Fire Guard Services and/or Temporary Heat, such service(s) will be included as separate line items in the Bid Breakdown.
- (C) If an item is set forth in the Bid Breakdown, but is not included in the Contract Documents (Drawings, Specifications, General Conditions, and/or Addenda), the bidder is advised to leave the item blank and exclude the cost of the item from its grand total. In an attachment to its Bid Breakdown, the bidder shall provide a list of all items left blank.
- (D) If an item is not set forth in the Bid Breakdown, but is included in the Contract Documents (Drawings, Specifications, General Conditions, and/or Addenda), the bidder is advised to add the item to its Bid Breakdown and include the cost of the item in its grand total. In an attachment to its Bid Breakdown, the bidder shall provide a list of all items added.

THIS PAGE INTENTIONALLY LEFT BLANK

DESCRIPTION AND LOCATION OF WORK:

**St. George Theater Stage Rigging Replacement
35 Hyatt Street
Staten Island, NY 10301
E-PIN: 85012B0147 / DDC PIN: 8502014PV0014C**

DOCUMENTS AVAILABLE AT:

Department of Design and Construction, Contract Section
30-30 Thomson Avenue – First Floor, Long Island City, NY 11101

SUBMISSION OF BIDS BEFORE BID OPENING:

TIME TO SUBMIT:

On or Before: **WEDNESDAY, JULY 2ND, 2014**

BIDS MUST BE CLOCKED IN PRIOR TO BID OPENING

PLACE TO SUBMIT:

Department of Design and Construction, Contract Section (located behind Security Desk)
30-30 Thomson Avenue – First Floor, Long Island City, NY 11101

BID OPENING:

PLACE OF BID OPENING:	Department of Design and Construction Contract Section 30-30 Thomson Avenue – First Floor Long Island City, NY 11101
DATE AND HOUR:	WEDNESDAY, JULY 2, 2014 @ 2:00 pm
	LATE BIDS WILL NOT BE ACCEPTED

PRE-BID CONFERENCE:

PLACE	St. George Theatre Stage 35 Hyatt Street Staten Island, NY 10301
DATE AND HOUR	TUESDAY, JUNE 17, 2014 AT 11:00AM
MANDATORY OR OPTIONAL	OPTIONAL

BID SECURITY:

Bid Security is required in the amount set forth below; provided, however, bid security is not required if the TOTAL BID PRICE set forth on the Bid Form is less than \$ 1,000,000.00.

- (1) Bond in an amount not less than 10% of the TOTAL BID PRICE set forth on the Bid Form, OR
- (2) Certified Check in an amount not less than 2% of the TOTAL BID PRICE set forth on the Bid Form.

PERFORMANCE AND PAYMENT SECURITY:

Required for Contracts in excess of \$1,000,000.00. Performance and Payment Security shall each be in an amount equal to 100% of the Contract Price

AGENCY CONTACT PERSON:

Lorraine Holley, 30-30 Thomson Avenue – First Floor, Long Island City, Queens, NY 11101
Telephone (718) 391-2200 or (718) 391-2608 Fax: (718) 391-2615



**BID BOOKLET
PART B**

THIS PAGE INTENTIONALLY LEFT BLANK

SAFETY QUESTIONNAIRE

The bidder must include, with its bid, all information requested on this Safety Questionnaire. Failure to provide a completed and signed Safety Questionnaire at the time of bid opening may result in disqualification of the bid as non-responsive.

1. Bidder Information:

Company Name: _____

DDC Project Number: _____

Company Size: _____ Ten (10) employees or less
 _____ Greater than ten (10) employees

Company has previously worked for DDC _____ YES _____ NO

2. Type(s) of Construction Work

TYPE OF WORK	LAST 3 YEARS	THIS PROJECT
General Building Construction	_____	_____
Residential Building Construction	_____	_____
Nonresidential Building Construction	_____	_____
Heavy Construction, except building	_____	_____
Highway and Street Construction	_____	_____
Heavy Construction, except highways	_____	_____
Plumbing, Heating, HVAC	_____	_____
Painting and Paper Hanging	_____	_____
Electrical Work	_____	_____
Masonry, Stonework and Plastering	_____	_____
Carpentry and Floor Work	_____	_____
Roofing, Siding, and Sheet Metal	_____	_____
Concrete Work	_____	_____
Specialty Trade Contracting	_____	_____
Asbestos Abatement	_____	_____
Other (specify)	_____	_____
_____	_____	_____

3. Experience Modification Rate:

The Experience Modification Rate (EMR) is a rating generated by the National Council of Compensation Insurance (NCCI). This rating is used to determine the contractor's premium for worker's compensation insurance. The contractor may obtain its EMR by contacting its insurance broker or the NCCI. If the contractor cannot obtain its EMR, it must submit a written explanation as to why.

The Contractor must indicate its Intrastate and Interstate EMR for the past three years. [Note: For contractors with less than three years of experience, the EMR will be considered to be 1.00].

YEAR	<u>INTRASTATE RATE</u>	<u>INTERSTATE RATE</u>
_____	_____	_____
_____	_____	_____
_____	_____	_____

If the Intrastate and/or Interstate EMR for any of the past three years is greater than 1.00, the contractor must attach, to this questionnaire, a written explanation for the rating and identify what corrective action was taken to correct the situation resulting in that rating.

4. OSHA Information:

YES NO Contractor has received a willful violation issued by OSHA or New York City Department of Buildings (NYCDOB) within the last three years.

YES NO Contractor has had an incident requiring OSHA notification within 8 hours (i.e., fatality, or hospitalization of three or more employees).

The Occupational Safety and Health Act (OSHA) of 1970 requires employers with ten or more employees, on a yearly basis to complete and maintain on file the form entitled "Log of Work-related Injuries and Illnesses". This form is commonly referred to as the OSHA 300 Log (OSHA 200 Log for 2001 and earlier).

The OSHA 300 Log must be submitted for the last three years for contractors with more than ten employees.

The Contractor must indicate the total number of hours worked by its employees, as reflected in payroll records for the past three years.

The contractor must submit the Incident Rate for Lost Time Injuries (the Incident Rate) for the past three years. The Incident Rate is calculated in accordance with the formula set forth below. For each given year, the total number of incidents is the total number of non-fatal injuries and illnesses reported on the OSHA 300 Log. The 200,000 hours represents the equivalent of 100 employees working forty hours a week, fifty weeks per year.

$$\text{Incident Rate} = \frac{\text{Total Number of Incidents} \times 200,000}{\text{Total Number of Hours Worked by Employees}}$$

YEAR	TOTAL NUMBERS OF HOURS WORKED BY EMPLOYEES	INCIDENT RATE
_____	_____	_____
_____	_____	_____
_____	_____	_____

If the contractor's Incident Rate for any of the past three years is one point higher than the Incident Rate for the type of construction it performs (listed below), the contractor must attach, to this questionnaire, a written explanation for the relatively high rate.

General Building Construction	8.5
Residential Building Construction	7.0
Nonresidential Building Construction	10.2
Heavy Construction, except building	8.7
Highway and Street Construction	9.7
Heavy Construction, except highways	8.3
Plumbing, Heating, HVAC	11.3
Painting and Paper Hanging	6.9
Electrical Work	9.5
Masonry, Stonework and Plastering	10.5
Carpentry and Floor Work	12.2
Roofing, Siding, and Sheet Metal	10.3
Concrete Work	8.6
Specialty Trade Contracting	8.6

5. Safety Performance on Previous DDC Project(s)

YES NO Contractor previously audited by the DDC Office of Site Safety.
 DDC Project Number(s): _____, _____, _____

YES NO Accident on previous DDC Project(s).
 DDC Project Number(s): _____, _____, _____

YES NO Fatality or Life-altering Injury on DDC Project(s) within the last three years.
 [Examples of a life-altering injury include loss of limb, loss of a sense (e.g., sight, hearing), or loss of neurological function].
 DDC Project Number(s): _____, _____, _____

Date: _____ By: _____
 (Signature of Owner, Partner, Corporate Officer)

Title: _____

THIS PAGE INTENTIONALLY LEFT BLANK

Pre-Award Process

The bidder is advised that as part of the pre-award review of its bid, it may be required to submit the information described in Sections (A) through (D) below. If required, the bidder must submit such information within five (5) business days following receipt of notification from DDC that it is among the low bidders. Such notification from DDC will be by facsimile or in writing and will specify the types of information which must be submitted.

In the event the bidder fails to submit the required information within the specified time frame, its bid may be rejected as nonresponsive.

- (A) **Project Reference Form:** If required, the bidder must complete and submit the Project Reference Form set forth on pages 28 through 30 of this Bid Booklet. The Project Reference Form consists of 3 parts: (1) Similar Contracts Completed by the Bidder, (2) Contracts Currently Under Construction by the Bidder, and (3) Pending Contracts Not Yet Started by the Bidder.
- (B) **Copy of License:** If required, the bidder must submit a copy of the license under which the bidder will be performing the work. Such license must clearly show the following: (1) Name of the Licensee, (2) License Number, and (3) Expiration date of the License. A copy of the license will be required from bidders for the following contracts: Plumbing Work, Electrical Work and Asbestos Abatement.
- (C) **Financial Information:** If required, the bidder must submit the financial information described below:

- (1) **Audited Financial Statements:** Financial statements (Balance Sheet and Income Statement) of the entity submitting the bid, as audited by an independent auditor licensed to practice as a certified public accountant (CPA). Audited financial statements for the three most recent fiscal years must be submitted. Each such financial statement must include the auditor's standard report.

If the bidder does not have audited financial statements, it must submit an affidavit attesting to the fact that the bidder does not have such statements. In addition, the bidder must submit the following documentation covering the three most recent fiscal years: signed federal tax returns, unaudited financial statements, and a "certified review letter" from a certified public accountant (CPA) verifying the unaudited financial statements.

Unless the most recent audited or unaudited financial statement was issued within ninety (90) days, the bidder must submit interim financial information that includes data on financial position and results of operation (income data) for the current fiscal year. Such information may be summarized on a monthly or quarterly basis or at other intervals.

- (2) **Schedule of Aged Accounts Receivable,** including portion due within ninety (90) days.
- (D) **Project Specific Information:** If required, the bidder must submit the project specific information described below:
- (1) Statement indicating the number of years of experience the bidder has had and in what type of construction.
- (2) Resumes of all key personnel to be involved in the project, including the proposed project superintendent.
- (3) List of significant pieces of equipment expected to be used for the contract, and whether such equipment is owned or leased.

- (4) Description of work expected to be subcontracted, and to what firms, if known.
- (5) List of key material suppliers.
- (6) Preliminary bar chart time schedule
- (7) Contractor's expected means of financing the project. This should be based on the assumption that the contractor is required to finance 2X average monthly billings throughout the contract period.
- (8) Any other issues the contractor sees as impacting his ability to complete the project according to the contract.

In addition to the information described in Sections (A) through (D) above, the bidder shall submit such additional information as the Commissioner may require, including without limitation, an explanation or justification for specific unit price items.

The bidder is further advised that it may be required to attend a pre-award meeting with DDC representatives. If such a meeting is convened, the bidder will be advised as to any additional material to be provided.

A. PROJECT REFERENCES – SIMILAR CONTRACTS COMPLETED BY THE BIDDER

List all contracts substantially completed within the last 4 years similar to the contract being awarded, up to a maximum of 10, in descending order of date of substantial completion.

Project & Location	Contract Type	Contract Amount (\$000)	Date Completed	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

B. PROJECT REFERENCES – CONTRACTS CURRENTLY UNDER CONSTRUCTION BY THE BIDDER

List all contracts currently under construction even if they are not similar to the contract being awarded.

Project & Location	Contract Type	Contract Amount (\$000)	Subcontracted to Others (\$000)	Uncompleted Portion (\$000)	Date Scheduled to Complete	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

C. PROJECT REFERENCES – PENDING CONTRACTS NOT YET STARTED BY THE BIDDER

List all contracts awarded to or won by the bidder but not yet started.

Project & Location	Contract Type	Contract Amount (\$000)	Date Scheduled to Start	Owner Reference & Tel. No.	Architect/Engineer Reference & Tel. No. if different from owner

THIS PAGE INTENTIONALLY LEFT BLANK

**OFFICE OF THE MAYOR
BUREAU OF LABOR SERVICES
CONTRACT CERTIFICATE**

To be completed if the contract is less than \$1,000,000

Contractor: _____

Address: _____

Telephone Number: _____

Name and Title of Signatory: _____

Contracting Agency or Owner: _____

Project Number: _____

Proposed Contract Amount: _____

Description and Address of Proposed Contract: _____

Names of Subcontractors in the amount of 750,000 or more on this contract (if not known at this time, so state indicating that trades will be subcontracted):

I, (fill in name of person signing) _____,
hereby affirm that I am authorized by the above-named contractor to certify that said contractor's proposed contract with the above-named owner or city agency is less than \$1,000,000. This affirmation is made in accordance with Executive Order No. 50 (1980) as amended and its implementing regulations.

Date

Signature

WILLFUL OR FRAUDULENT FALSIFICATION OF ANY DATA OR INFORMATION SUBMITTED HEREWITH MAY RESULT IN THE TERMINATION OF ANY CONTRACT BETWEEN THE CITY AND THE BIDDER OR CONTRACTOR AND BAR THE BIDDER OR CONTRACTOR FROM PARTICIPATION IN ANY CITY CONTRACT FOR A PERIOD OF UP TO THREE YEARS. FURTHER, SUCH FALSIFICATION MAY RESULT IN CRIMINAL PROSECUTION.

THIS PAGE INTENTIONALLY LEFT BLANK

VENDEX COMPLIANCE

(A) **Vendex Fees:** Pursuant to Procurement Policy Board Rule 2-08(f)(2), the contractor will be charged a fee for the administration of the VENDEX system, including the Vendor Name Check process, if a Vendor Name Check review is required to be conducted by the Department of Investigation. The contractor shall also be required to pay the applicable required fees for any of its subcontractors for which Vendor Name Check reviews are required. The fee(s) will be deducted from payments made to the contractor under the contract. For contracts with an estimated value of less than or equal to \$1,000,000, the fee will be \$175 per Vendor Name Check review. For contracts with an estimated value of greater than \$1,000,000, the fee will be \$350 per Vendor Name Check review.

(B) **Confirmation of Vendex Compliance:** The Bidder shall submit this Confirmation of Vendex Compliance to the Department of Design and Construction, Contracts Section, 30-30 Thomson Avenue – First Floor, Long Island City, NY 11101.

Bid Information: The Bidder shall complete the bid information set forth below.

Name of Bidder: _____
Bidder's Address: _____
Bidder's Telephone Number: _____
Bidder's Fax Number: _____
Date of Bid Opening: _____
Project ID: _____

Vendex Compliance: To demonstrate compliance with Vendex requirements, the Bidder shall complete either Section (1) or Section (2) below, whichever applies.

(1) **Submission of Vendex Questionnaires to MOCS:** By signing in the space provided below, the Bidder certifies that as of the date specified below, the Bidder has submitted Vendex Questionnaires to the Mayor's Office of Contract Services, Attn: VENDEX, 253 Broadway, 9th Floor, New York, New York 10007.

Date of Submission: _____

By: _____
(Signature of Partner or corporate officer)

Print Name: _____

(2) **Submission of Certification of No Change to DDC:** By signing in the space provided below, the Bidder certifies that it has read the instructions in a "Vendor's Guide to Vendex" and that such instructions do not require the Bidder to submit Vendex Questionnaires. The Bidder has completed **TWO ORIGINALS** of the Certification of No Change set forth on the next page of this Bid Booklet.

By: _____
(Signature of Partner or corporate officer)

Print Name: _____

THIS PAGE INTENTIONALLY LEFT BLANK

DIRECTIONS: Please execute two originals (both with original signature).
Please forward directly to the agency (not M.O.C.S.).



Certificate of No Change Form

- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, _____, being duly sworn, state that I have read
Enter Your Name

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

Vendor Questionnaire *This section is required.*

This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.

Name of Submitting Entity: _____

Vendor's Address: _____

Vendor's EIN or TIN: _____ Requesting Agency: _____

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed for the submitting vendor: _____

Signature date on change submission for the submitting vendor: _____

Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change
1		
2		
3		
4		
5		
6		

Check if additional changes were submitted and attach a document with the date of additional submissions.

Certification *This section is required.*

This form must be signed and notarized. Please complete this twice. Copies will not be accepted.

Certified By:

Name (Print)

Title

Name of Submitting Entity

Signature

Date

Notarized By:

Notary Public

County License Issued

License Number

Sworn to before me on: _____
Date

DIRECTIONS: Please execute two originals (both with original signature).
Please forward directly to the agency (not M.O.C.S.).



Certificate of No Change Form

- Please submit two completed forms. Copies will not be accepted.
- Please send both copies to the agency that requested it, unless you are advised to send it directly to the Mayor's Office of Contract Services (MOCS).
- A materially false statement willfully or fraudulently made in connection with this certification, and/or the failure to conduct appropriate due diligence in verifying the information that is the subject of this certification, may result in rendering the submitting entity non-responsible for the purpose of contract award.
- A materially false statement willfully or fraudulently made in connection with this certification may subject the person making the false statement to criminal charges

I, _____, being duly sworn, state that I have read
Enter Your Name

and understand all the items contained in the vendor questionnaire and any submission of change as identified on page one of this form and certify that as of this date, these items have not changed. I further certify that, to the best of my knowledge, information and belief, those answers are full, complete, and accurate; and that, to the best of my knowledge, information, and belief, those answers continue to be full, complete, and accurate.

In addition, I further certify on behalf of the submitting vendor that the information contained in the principal questionnaire(s) and any submission of change identified on page two of this form have not changed and have been verified and continue, to the best of my knowledge, to be full, complete and accurate.

I understand that the City of New York will rely on the information supplied in this certification as additional inducement to enter into a contract with the submitting entity.

Vendor Questionnaire *This section is required.*

This refers to the vendor questionnaire(s) submitted for the vendor doing business with the City.

Name of Submitting Entity: _____

Vendor's Address: _____

Vendor's EIN or TIN: _____ Requesting Agency: _____

Are you submitting this Certification as a parent? (Please circle one) Yes No

Signature date on the last full vendor questionnaire signed for the submitting vendor: _____

Signature date on change submission for the submitting vendor: _____

Principal Questionnaire

This section refers to the most recent principal questionnaire submissions.



Principal Name	Date of signature on last full Principal Questionnaire	Date(s) of signature on submission of change
1		
2		
3		
4		
5		
6		

Check if additional changes were submitted and attach a document with the date of additional submissions.

Certification *This section is required.*

This form must be signed and notarized. Please complete this twice. Copies will not be accepted.

Certified By:

Name (Print)

Title

Name of Submitting Entity

Signature

Date

Notarized By:

Notary Public

County License Issued

License Number

Sworn to before me on: _____
Date

**IRAN DIVESTMENT ACT COMPLIANCE RIDER
FOR NEW YORK CITY CONTRACTORS**

The Iran Divestment Act of 2012, effective as of April 12, 2012, is codified at State Finance Law (“SFL”) §165-a and General Municipal Law (“GML”) §103-g. The Iran Divestment Act, with certain exceptions, prohibits municipalities, including the City, from entering into contracts with persons engaged in investment activities in the energy sector of Iran. Pursuant to the terms set forth in SFL §165-a and GML §103-g, a person engages in investment activities in the energy sector of Iran if:

- (a) The person provides goods or services of twenty million dollars or more in the energy sector of Iran, including a person that provides oil or liquefied natural gas tankers, or products used to construct or maintain pipelines used to transport oil or liquefied natural gas, for the energy sector of Iran; or
- (b) The person is a financial institution that extends twenty million dollars or more in credit to another person, for forty-five days or more, if that person will use the credit to provide goods or services in the energy sector in Iran and is identified on a list created pursuant to paragraph (b) of subdivision three of Section 165-a of the State Finance Law and maintained by the Commissioner of the Office of General Services.

A bid or proposal shall not be considered for award nor shall any award be made where the bidder or proposer fails to submit a signed and verified bidder’s certification.

Each bidder or proposer must certify that it is not on the list of entities engaged in investment activities in Iran created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. In any case where the bidder or proposer cannot certify that they are not on such list, the bidder or proposer shall so state and shall furnish with the bid or proposal a signed statement which sets forth in detail the reasons why such statement cannot be made. The City of New York may award a bid to a bidder who cannot make the certification on a case by case basis if:

- (1) The investment activities in Iran were made before the effective date of this section (i.e., April 12, 2012), the investment activities in Iran have not been expanded or renewed after the effective date of this section and the person has adopted, publicized and is implementing a formal plan to cease the investment activities in Iran and to refrain from engaging in any new investments in Iran; or
- (2) The City makes a determination that the goods or services are necessary for the City to perform its functions and that, absent such an exemption, the City would be unable to obtain the goods or services for which the contract is offered. Such determination shall be made in writing and shall be a public document.

**BIDDER'S CERTIFICATION OF COMPLIANCE WITH
IRAN DIVESTMENT ACT**

Pursuant to General Municipal Law §103-g, which generally prohibits the City from entering into contracts with persons engaged in investment activities in the energy sector of Iran, the bidder/proposer submits the following certification:

[Please Check One]

BIDDER'S CERTIFICATION

By submission of this bid or proposal, each bidder/proposer and each person signing on behalf of any bidder/proposer certifies, and in the case of a joint bid each party thereto certifies as to its own organization, under penalty of perjury, that to the best of its knowledge and belief, that each bidder/proposer is not on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law.

I am unable to certify that my name and the name of the bidder/proposer does not appear on the list created pursuant to paragraph (b) of subdivision 3 of Section 165-a of the State Finance Law. I have attached a signed statement setting forth in detail why I cannot so certify.

Dated: _____, New York
_____, 20__

SIGNATURE

PRINTED NAME

TITLE

Sworn to before me this
____ day of _____, 20__

Notary Public

Dated:

CITY OF NEW YORK

DIVISION OF LABOR SERVICES

CONSTRUCTION EMPLOYMENT REPORT

THIS PAGE INTENTIONALLY LEFT BLANK

The City of New York Department of Small Business Services
Division of Labor Services Contract Compliance Unit
110 William Street, New York, New York 10038
Phone: (212) 513 - 6323
Fax: (212) 618-8879

CONSTRUCTION EMPLOYMENT REPORT

GENERAL INFORMATION

1. Your contractual relationship in this contract is: Prime contractor Subcontractor
- 1a. Are M/WBE goals attached to this project? Yes No
2. Please check one of the following if your firm would like information on how to certify with the City of New York as a:
 Minority Owned Business Enterprise Locally Based Business Enterprise
 Women Owned Business Enterprise Emerging Business Enterprise
 Disadvantaged Business Enterprise
- 2a. If you are certified as an **MBE, WBE, LBE, EBE** or **DBE**, what city/state agency are you certified with? _____ Are you DBE certified? Yes No
3. Please indicate if you would like assistance from SBS in identifying certified M/WBEs for contracting opportunities: Yes No
4. Is this project subject to a project labor agreement? Yes No
5. Are you a Union contractor? Yes No If yes, please list which local(s) you affiliated with _____
6. Are you a Veteran owned company? Yes No

PART I: CONTRACTOR/SUBCONTRACTOR INFORMATION

7. _____
Employer Identification Number or Federal Tax I.D. Email Address
8. _____
Company Name
9. _____
Company Address and Zip Code
10. _____
Chief Operating Officer Telephone Number
11. _____
Designated Equal Opportunity Compliance Officer Telephone Number
(If same as Item #10, write "same")
12. _____
Name of Prime Contractor and Contact Person
(If same as Item #8, write "same")

13. Number of employees in your company: _____

14. Contract information:

(a) _____ (b) _____
Contracting Agency (City Agency) Contract Amount

(c) _____ (d) _____
Procurement Identification Number (PIN) Contract Registration Number (CT#)

(e) _____ (f) _____
Projected Commencement Date Projected Completion Date

(g) Description and location of proposed contract:

15. Has your firm been reviewed by the Division of Labor Services (DLS) within the past 36 months and issued a Certificate of Approval? Yes___ No___

If yes, attach a copy of certificate.

16. Has DLS within the past month reviewed an Employment Report submission for your company and issued a Conditional Certificate of Approval? Yes___ No___

If yes, attach a copy of certificate.

NOTE: DLS WILL NOT ISSUE A CONTINUED CERTIFICATE OF APPROVAL IN CONNECTION WITH THIS CONTRACT UNLESS THE REQUIRED CORRECTIVE ACTIONS IN PRIOR CONDITIONAL CERTIFICATES OF APPROVAL HAVE BEEN TAKEN.

17. Has an Employment Report already been submitted for a different contract (not covered by this Employment Report) for which you have not yet received compliance certificate?

Yes___ No___ If yes,

Date submitted: _____

Agency to which submitted: _____

Name of Agency Person: _____

Contract No: _____

Telephone: _____

18. Has your company in the past 36 months been audited by the United States Department of Labor, Office of Federal Contract Compliance Programs (OFCCP)? Yes___ No___

If yes,

(a) Name and address of OFCCP office.

(b) Was a Certificate of Equal Employment Compliance issued within the past 36 months?
Yes___ No___

If yes, attach a copy of such certificate.

(c) Were any corrective actions required or agreed to? Yes___ No___

If yes, attach a copy of such requirements or agreements.

(d) Were any deficiencies found? Yes___ No___

If yes, attach a copy of such findings.

19. Is your company or its affiliates a member or members of an employers' trade association which is responsible for negotiating collective bargaining agreements (CBA) which affect construction site hiring? Yes___ No___

If yes, attach a list of such associations and all applicable CBA's.

PART II: DOCUMENTS REQUIRED

20. For the following policies or practices, attach the relevant documents (e.g., printed booklets, brochures, manuals, memoranda, etc.). If the policy(ies) are unwritten, attach a full explanation of the practices. See instructions.

- ___ (a) Health benefit coverage/description(s) for all management, nonunion and union employees (whether company or union administered)
- ___ (b) Disability, life, other insurance coverage/description
- ___ (c) Employee Policy/Handbook
- ___ (d) Personnel Policy/Manual
- ___ (e) Supervisor's Policy/Manual
- ___ (f) Pension plan or 401k coverage/description for all management, nonunion and union employees, whether company or union administered
- ___ (g) Collective bargaining agreement(s).
- ___ (h) Employment Application(s)
- ___ (i) Employee evaluation policy/form(s).
- ___ (j) Does your firm have medical and/or non-medical (i.e. education, military, personal, pregnancy, child care) leave policy?

21. To comply with the Immigration Reform and Control Act of 1986 when and of whom does your firm require the completion of an I-9 Form?

- (a) Prior to job offer Yes___ No___
- (b) After a conditional job offer Yes___ No___
- (c) After a job offer Yes___ No___
- (d) Within the first three days on the job Yes___ No___
- (e) To some applicants Yes___ No___
- (f) To all applicants Yes___ No___
- (g) To some employees Yes___ No___
- (h) To all employees Yes___ No___

22. Explain where and how completed I-9 Forms, with their supportive documentation, are maintained and made accessible.

23. Does your firm or any of its collective bargaining agreements require job applicants to take a medical examination? Yes___ No___

If yes, is the medical examination given:

- (a) Prior to a job offer Yes___ No___
- (b) After a conditional job offer Yes___ No___
- (c) After a job offer Yes___ No___
- (d) To all applicants Yes___ No___
- (e) Only to some applicants Yes___ No___

If yes, list for which applicants below and attach copies of all medical examination or questionnaire forms and instructions utilized for these examinations.

24. Do you have a written equal employment opportunity (EEO) policy? Yes___ No___

If yes, list the document(s) and page number(s) where these written policies are located.

25. Does the company have a current affirmative action plan(s) (AAP)

- ____ Minorities and Women
- ____ Individuals with handicaps
- ____ Other. Please specify _____

26. Does your firm or collective bargaining agreement(s) have an internal grievance procedure with respect to EEO complaints? Yes___ No___

If yes, please attach a copy of this policy.

If no, attach a report detailing your firm's unwritten procedure for handling EEO complaints.

27. Has any employee, within the past three years, filed a complaint pursuant to an internal grievance procedure or with any official of your firm with respect to equal employment opportunity? Yes___ No___

If yes, attach an internal complaint log. See instructions.

28. Has your firm, within the past three years, been named as a defendant (or respondent) in any administrative or judicial action where the complainant (plaintiff) alleged violation of any anti-discrimination or affirmative action laws? Yes___ No___

If yes, attach a log. See instructions.

29. Are there any jobs for which there are physical qualifications? Yes___ No___

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

30. Are there any jobs for which there are age, race, color, national origin, sex, creed, disability, marital status, sexual orientation, or citizenship qualifications? Yes___ No___

If yes, list the job(s), submit a job description and state the reason(s) for the qualification(s).

SIGNATURE PAGE

I, (print name of authorized official signing) _____ hereby certify that the information submitted herewith is true and complete to the best of my knowledge and belief and submitted with the understanding that compliance with New York City's equal employment requirements, as contained in Chapter 56 of the City Charter, Executive Order No. 50 (1980), as amended, and the implementing Rules and Regulations, is a contractual obligation. I also agree on behalf of the company to submit a certified copy of payroll records to the Division of Labor Services on a monthly basis.

Contractor's Name

Name of person who prepared this Employment Report

Title

Name of official authorized to sign on behalf of the contractor

Title

Telephone Number

Signature of authorized official

Date

If contractors are found to be underutilizing minorities and females in any given trade based on Chapter 56 Section 3H, the Division of Labor Services reserves the right to request the contractor's workforce data and to implement an employment program.

Contractors who fail to comply with the above mentioned requirements or are found to be in noncompliance may be subject to the withholding of final payment.

Willful or fraudulent falsifications of any data or information submitted herewith may result in the termination of the contract between the City and the bidder or contractor and in disapproval of future contracts for a period of up to five years. Further, such falsification may result in civil and/or criminal prosecution.

To the extent permitted by law and consistent with the proper discharge of DLS' responsibilities under Charter Chapter 56 of the City Charter and Executive Order No. 50 (1980) and the implementing Rules and Regulations, all information provided by a contractor to DLS shall be confidential.

Only original signatures accepted.

Sworn to before me this _____ day of _____ 20 _____

Notary Public

Authorized Signature

Date

FORM A. CONTRACT BID INFORMATION: USE OF SUBCONTRACTORS/TRADES

1. Do you plan to subcontractor work on this contract? Yes ___ No ___
2. If yes, complete the chart below.

NOTE: All proposed subcontractors with a subcontract in excess of \$750,000 must complete an Employment Report for review and approval before the contract may be awarded and work commences.

SUBCONTRACTOR'S NAME*	OWNERSHIP (ENTER APPROPRIATE CODE LETTERS BELOW)	WORK TO BE PERFORMED BY SUBCONTRACTOR	TRADE PROJECTED FOR USE BY SUBCONTRACTOR	PROJECTED DOLLAR VALUE OF SUBCONTRACT

***If subcontractor is presently unknown, please enter the trade (craft name).**

OWNERSHIP CODES

- W: White
- B: Black
- H: Hispanic
- A: Asian
- N: Native American
- F: Female

FORM B: PROJECTED WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (TOT) Total by Column
- (A) Apprentice
- (TRN) Trainee

For each trade to be engaged by your company for this project, enter the projected workforce for Males and Females by trade classification on the charts below.

Trade:	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J										
H										
A										
TRN										
TOT										

Trade: _____

Union Affiliation, if applicable _____

Total (Col. #1-10): _____

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10): _____

Total Female
(Col. #6 - 10): _____

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM B: PROJECTED WORKFORCE

Trade: _____

Union Affiliation, if applicable _____

Total (Col. #1-10): _____

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10): _____

Total Female
(Col. #6 - 10): _____

MALES

FEMALES

	MALES			FEMALES						
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hispanic	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hispanic	(9) Asian	(10) Native Amer.
J										
H										
A										
TRN										
TOT										

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM C: CURRENT WORKFORCE

TRADE CLASSIFICATION CODES

- (J) Journeylevel Workers
- (H) Helper
- (A) Apprentice
- (TRN) Trainee
- (TOT) Total by Column

For each trade currently engaged by your company for all work performed in New York City, enter the current workforce for Males and Females by trade classification on the charts below.

Trade:	MALES					FEMALES				
	(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.	(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.
J										
H										
A										
TRN										
TOT										

Total (Col. #1-10):

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10):

Total Female
(Col. #6 - 10):

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?

FORM C: CURRENT WORKFORCE

Trade: _____

Union Affiliation, if applicable _____

Total (Col. #1-10): _____

Total Minority, Male & Female
(Col. #2,3,4,5,7,8,9, & 10): _____

Total Female
(Col. #6 - 10): _____

MALES

(1) White Non Hisp.	(2) Black Non Hisp.	(3) Hisp.	(4) Asian	(5) Native Amer.

J

H

A

TRN

TOT

FEMALES

(6) White Non Hisp.	(7) Black Non Hisp.	(8) Hisp.	(9) Asian	(10) Native Amer.

What are the recruitment sources for you projected hires (i.e., unions, government employment office, job tap center, community outreach)?



FMS ID: PV467-STG



**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION

**St. George Theater Stage Rigging
Replacement**

**LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK**

Contractor _____

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper _____

Dated _____, 20____





NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

PROJECT ID: PV467-STG

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 2 OF 3

**INFORMATION FOR BIDDERS
CONTRACT
PERFORMANCE AND PAYMENT BONDS
SCHEDULE OF PREVAILING WAGES
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR THE PROJECT

**St. George Theater Stage Rigging
Replacement**

LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK

CONTRACT NO. 1 GENERAL CONSTRUCTION

Department of Cultural Affairs

Wallance + Hibbs Architects

Date: April 17, 2014



LA-114





NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 2 OF 3

**INFORMATION FOR BIDDERS
CONTRACT
PERFORMANCE AND PAYMENT BONDS
SCHEDULE OF PREVAILING WAGES
GENERAL CONDITIONS**

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR THE PROJECT





NOTICE TO BIDDERS

Please be advised that the City of New York has issued a new Standard Construction Contract. The new Contract, which is incorporated in this bid, is significantly different from the 2008 version previously used by the City. A listing of some of the significant changes is provided below. This notice is only a partial listing. Please refer to the Contract itself for a full understanding of the changes and the actual text of the changes that were made. The text of the revised Standard Construction Contract is the controlling document should there be any discrepancies between this notice and the Standard Construction Contract.

Significant changes include the following:

ARTICLE 11 DAMAGES CAUSED BY DELAYS

In 2008, the City embarked on a pilot project to test the use of new construction contract language altering the allocation of the risk of project delays, as between the City and the contractor. The City has determined to make the pilot project language the standard language for all City construction contracts. Accordingly, there is now one Standard City Construction Contract that it to be used by all agencies for all bids released after the release of the new contract. The damages for delay language is Article 11. Please note that changes have been made to the damages for delay provisions from the pilot to the adopted version.

ARTICLE 22 INSURANCE

Changes have been made to the insurance provisions, including incorporating requirements that the insurance provided comply with recent NYC Department of Buildings regulations specifying required dollar limits for CGL insurance for certain projects and requiring proof of builder's risk insurance prior to Work commencing rather than within 10 days of award.

ARTICLE 26 EXTRA WORK

The percentage paid for overhead for Extra Work pursuant to Section 26.1.11 is increased from 10% to 12% and the calculation of Worker's Compensation insurance costs reimbursed for Extra Work has been clarified.

ARTICLE 37 LABOR LAW REQUIREMENTS
ARTICLE 38 PAYROLL REPORTS

The provisions governing Labor Law provisions have been tightened, including requirements the employee identification cards include a photo (unless the requirement is waived), a prohibition on cash payments to employees and subcontractors, and clear enforcement authority requirements.

ARTICLE 70 ELECTRONIC FILING

A provision is added to make mandatory the electronic filing of certain alteration permits with the Department of Buildings.

Other significant changes include the following:

ARTICLE 7 INDEMNIFICATION

Changes have been made to the indemnification provisions.

ARTICLE 14 FINAL ACCEPTANCE OF WORK
ARTICLE 44 SUBSTANTIAL COMPLETION PAYMENT

The Commissioner is no longer required to issue a substantial completion determination in addition to the already existing requirement that the Engineer issue a substantial completion determination and reach an agreement on a punch list of remaining work. Now, the Engineer, when issuing the punch list to the Contractor, must also include a proposed schedule for the completion of the punch list. The Contractor may propose an alternative schedule that is subject to the approval of the Engineer. If the Contractor fails to respond to the Engineer's proposed schedule, the Engineer's schedule is deemed accepted.

ARTICLE 15 LIQUIDATED DAMAGES

The contract is revised to match Schedule A to provide that liquidated damages are available only until substantial completion.

ARTICLE 17 SUBCONTRACTS

The requirements for prior approval of subcontractors, and for contractors to be responsible for the actions of their subcontractors, have been tightened. The requirement that the Contractor list subcontractors in the City's Payee Information Portal has been added; the provision was previously attached as a rider.

ARTICLE 19 SECURITY DEPOSIT

The provisions governing the return of bid deposits are clarified.

ARTICLE 20 PAYMENT GUARANTEE

The Payment Guaranty provisions, which apply when the City does not require the Contractor to obtain payment bonds, has been significantly revised to track the requirements of State Finance law 137.

ARTICLE 28 RECORDKEEPING FOR EXTRA OR DISPUTED WORK

The recordkeeping requirement that currently apply to payments for Time & Materials for extra work are expressly made applicable to regular work that is paid for on a T & M basis.

ARTICLE 35 EMPLOYEES

The whistleblower provisions of local law are added to the construction contract. They previously have been attached as a rider.

**ARTICLE 38 PAYROLL REPORTS
ARTICLE 77 RECORDS RETENTION**

Requirements that records be maintained for six years and directions on how such records must be made available.

ARTICLE 42 PARTIAL PAYMENTS

Increased flexibility has been provided for when contractors may submit invoices.

ARTICLE 62 TAX EXEMPTION

The provisions identifying the State tax exemption for municipalities are revised to more clearly describe State law.



NOTICE TO BIDDERS, PROPOSERS, CONTRACTORS, AND RENEWAL CONTRACTORS

This contract includes a provision concerning the protection of employees for whistleblowing activity, pursuant to New York City Local Law Nos. 30-2012 and 33-2012, effective October 18, 2012 and September 18, 2012, respectively. The provisions apply to contracts with a value in excess of \$100,000.

Local Law No. 33-2012, the Whistleblower Protection Expansion Act ("WPEA"), prohibits a contractor or its subcontractor from taking an adverse personnel action against an employee or officer for whistleblower activity in connection with a City contract; requires that certain City contracts include a provision to that effect; and provides that a contractor or subcontractor may be subject to penalties and injunctive relief if a court finds that it retaliated in violation of the WPEA. The WPEA is codified at Section 12-113 of the New York City Administrative Code.

Local Law No. 30-2012 requires a contractor to prominently post information explaining how its employees can report allegations of fraud, false claims, criminality, or corruption in connection with a City contract to City officials and the rights and remedies afforded to employees for whistleblowing activity. Local Law No. 30-2012 is codified at Section 6-132 of the New York City Administrative Code.

WHISTLEBLOWER PROTECTION EXPANSION ACT RIDER

1. In accordance with Local Law Nos. 30-2012 and 33-2012, codified at sections 6-132 and 12-113 of the New York City Administrative Code, respectively,
 - (a) Contractor shall not take an adverse personnel action with respect to an officer or employee in retaliation for such officer or employee making a report of information concerning conduct which such officer or employee knows or reasonably believes to involve corruption, criminal activity, conflict of interest, gross mismanagement or abuse of authority by any officer or employee relating to this Contract to (i) the Commissioner of the Department of Investigation, (ii) a member of the New York City Council, the Public Advocate, or the Comptroller, or (iii) the City Chief Procurement Officer, ACCO, Agency head, or Commissioner.
 - (b) If any of Contractor's officers or employees believes that he or she has been the subject of an adverse personnel action in violation of subparagraph (a) of paragraph 1 of this rider, he or she shall be entitled to bring a cause of action against Contractor to recover all relief necessary to make him or her whole. Such relief may include but is not limited to: (i) an injunction to restrain continued retaliation, (ii) reinstatement to the position such employee would have had but for the retaliation or to an equivalent position, (iii) reinstatement of full fringe benefits and seniority rights, (iv) payment of two times back pay, plus interest, and (v) compensation for any special damages sustained as a result of the retaliation, including litigation costs and reasonable attorney's fees.
 - (c) Contractor shall post a notice provided by the City in a prominent and accessible place on any site where work pursuant to the Contract is performed that contains information about:
 - (i) how its employees can report to the New York City Department of Investigation allegations of fraud, false claims, criminality or corruption arising out of or in connection with the Contract; and
 - (ii) the rights and remedies afforded to its employees under New York City Administrative Code sections 7-805 (the New York City False Claims Act) and 12-113 (the Whistleblower Protection Expansion Act) for lawful acts taken in connection with the reporting of allegations of fraud, false claims, criminality or corruption in connection with the Contract.
 - (d) For the purposes of this rider, "adverse personnel action" includes dismissal, demotion, suspension, disciplinary action, negative performance evaluation, any action resulting in loss of staff, office space, equipment or other benefit, failure to appoint, failure to promote, or any transfer or assignment or failure to transfer or assign against the wishes of the affected officer or employee.
 - (e) This rider is applicable to all of Contractor's subcontractors having subcontracts with a value in excess of \$100,000; accordingly, Contractor shall include this rider in all subcontracts with a value a value in excess of \$100,000.
2. Paragraph 1 is not applicable to this Contract if it is valued at \$100,000 or less. Subparagraphs (a), (b), (d), and (e) of paragraph 1 are not applicable to this Contract if it was solicited pursuant to a finding of an emergency. Subparagraph (c) of paragraph 1 is neither applicable to this Contract if it was solicited prior to October 18, 2012 nor if it is a renewal of a contract executed prior to October 18, 2012.

Notice to Bidders:

In 2013 the City will be implementing a new web based subcontractor reporting system. Once this subcontractor reporting system is implemented, and Contractor receives notice of its implementation, Contractor will be required to list in the system all of the subcontractors that it knows it will use or is already using in the performance of this contract. For each subcontractor listed, Contractor will be required to provide the following information: maximum contract value, description of subcontractor work, start and end date of the subcontract and identification of the subcontractor's industry. Identification of subcontractors in the system along with the required information will be required in order to obtain subcontractor approval under [section 3.02 of Appendix A][Article 17 of the Standard Construction Contract] and PPB Rule § 4-13 for all subcontractors that have not been approved as of the implementation date. Thereafter, Contractor will be required to report in the system the payments made to each subcontractor within 30 days of making the payment. If any of the required information changes throughout the term of the contract, Contractor will be required to revise the information in the system...

When the subcontractor reporting system is implemented, Contractor will receive a written notice from the City which will contain the information the Contractor will need to list its subcontractors and report payments. Contractor will not be required to comply with the requirements set forth herein until such notice is issued. Contractor will have 30 days from the date of the notice to list its current subcontractors for which it has already received Agency approval, if any. Thereafter, for those subcontractors that have not yet been approved by the Agency, subcontractors will have to be listed in the system in order to obtain the required Agency approval.

Failure of the Contractor to list a subcontractor and/or to report subcontractor payments in a timely fashion may result in the Agency declaring the Contractor in default of the Contract and may subject Contractor to liquidated damages in the amount of \$100 per day for each day that the Contractor fails to identify a subcontractor along with the required information about the subcontractor and/or fails to report payments to a subcontractor, beyond the time frames set forth herein or in the notice from the City. For construction contracts, the provisions of Article 15 of the Standard Construction Contract shall govern the issue of liquidated damages.

Contractor hereby agrees to these provisions and acknowledges that they will become effective on the date set forth in the notice.

THIS PAGE INTENTIONALLY LEFT BLANK

RIDER

Pursuant to 44 CFR §13.36(i), the following provisions are inserted into the Contract:

1. The City shall have the right to terminate this Contract, in whole or in part, for cause or without cause. The City shall give no less than 30 days written notice of termination ("Termination Notice") for termination without cause and no less than 10 days notice for termination for cause unless a shorter time is determined by the Commissioner to be necessary. If the City terminates this Contract the City shall not incur or pay any further obligation pursuant to this Contract beyond the termination date set by the City in the Termination Notice. The City shall pay for services rendered or goods delivered in accordance with this Contract prior to the termination date. In addition, any obligation necessarily incurred by the Contractor on account of this Contract prior to receipt of notice of termination and falling due after the termination date shall be paid by the City in accordance with the terms of this Contract. In no event shall such obligation be construed as including any lease or other occupancy agreement, oral or written, entered into between the Contractor and its landlord.

2. In the event of a Default of Contractor's obligations under this Contract, the Commissioner, after declaring the Contractor in default, may have the services under the Contract completed by such means and in such manner, by contract with or without public letting, or otherwise, as he or she may deem advisable in accordance with applicable PPB Rules. After such completion, the Commissioner shall certify the expense incurred in such completion, which shall include the cost of re-letting. Should the expense of such completion, as certified by the Commissioner, exceed the total sum which would have been payable under the Contract if it had been completed by the Contractor, any excess shall be promptly paid by the Contractor upon demand by the City. The excess expense of such completion, including any and all related and incidental costs, as so certified by the Commissioner, and any liquidated damages assessed against the Contractor, may be charged against and deducted out of monies earned by the Contractor.

3. If applicable, Contractor shall comply, and shall cause its subcontractors to comply with Executive Order 11246 of September 24, 1964, entitled "Equal Employment Opportunity" as amended by Executive Order 11375 of October 13, 1967 and supplemented in Department of Labor regulations (41 CFR Chapter 60).(applicable to all construction contracts awarded in excess of \$10,000)

4. If applicable, Contractor shall comply, and shall cause its subcontractors to comply with the Copeland "Anti-Kickback" Act (18 U.S.C 874) as supplemented in Department of Labor regulations (29 CFR Part 3).(applicable to contracts for construction or repair)

5. If applicable, Contractor shall comply, and cause its subcontractors to comply with the Davis-Bacon Act (40 U.S.C. 276a to 276a-7) as supplemented by Department of Labor regulations (29 CFR Part 5).(applicable to construction contracts in excess of \$2,000)

6. If applicable, Contractor shall comply and cause its subcontractors to comply with Sections 103 and 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 327-330) as supplemented by Department of Labor regulations (29 CFR Part 5).(applicable to construction contracts in excess of \$2,000, and in excess of \$2,500 for other contract which involve the employment of mechanics or laborers)

7. Contractor shall be required to produce and deliver such reports relating to the services performed under this Contract as may be required by the City or any other State or federal governmental agency with jurisdiction.

8. Pursuant to 44 CFR §13.34, if the services under this Contract are supported by a federal grant of funds FEMA reserves a royalty-free, non-exclusive, and irrevocable right to reproduce, publish, or otherwise use, and to authorize others to use, for Federal Government purposes: (1) the copyright in any work developed under a grant, subgrant, or contract under a grant or subgrant; and (2) any rights of copyright to which a grantee, subgrantee, or contractor purchases ownership with grant support.

9. Any reports, documents, data, photographs, deliverables, and/or other materials produced pursuant to this Contract ("Copyrightable Materials"), and any and all drafts and/or other preliminary materials in any format related to such items produced pursuant to this Contract, shall upon their creation become the exclusive property of the City. The Copyrightable Materials shall be considered "work-made-for-hire" within the meaning and purview of Section 101 of the United States Copyright Act, 17 U.S.C. § 101, and the City shall be the copyright owner thereof and of all aspects, elements and components thereof in which copyright protection might exist. To the extent that the Copyrightable Materials do not qualify as "work-made-for-hire," the Contractor hereby irrevocably transfers, assigns and conveys exclusive copyright ownership in and to the Copyrightable Materials to the City, free and clear of any liens, claims, or other encumbrances. The Contractor shall retain no copyright or intellectual property interest in the Copyrightable Materials.

10. The Contractor shall promptly and fully report to the Department any discovery or invention arising out of or developed in the course of performance of this Contract. If the services under this Contract are supported by a federal grant of funds, the Contractor shall promptly and fully report to the federal government for the federal government to make a determination as to whether patent protection on such invention shall be sought and how the rights in the invention or discovery, including rights under any patent issued thereon, shall be disposed of and administered in order to protect the public interest.

11. The Contractor shall grant access to the State, the City, FEMA, and/or the Comptroller General of the United States, or any of their duly authorized representatives, to any books, documents, papers, and/or records of the Contractor that are directly pertinent to the Contract for the purpose of making audit, examination, excerpts, and transcriptions. Contractor shall retain all books, documents, papers or records relating to the services performed under this

Contract for three years after final payment under this Contract is made and all other pending matters are closed.

12. For any contract or subcontract the value of which is in excess of \$100,000: The Contractor shall comply and shall cause its subcontractor to comply with all applicable standards, orders, or requirements issued under Section 306 of the Clean Air Act (42 U.S.C. §1857(h)), Section 508 of the Clean Water Act (33 U.S.C. §1368), Executive Order 11738, and Environmental Protection Agency regulations (40 CFR Part 15).

13. The Contractor shall comply with mandatory standards and policies relating to energy efficiency that are contained in the State's energy conservation plan issued in compliance with the Energy Policy and Conservation Act (Pub. L. 94-163, 89 Stat. 871).



NOTICE TO BIDDERS

Please be advised that the City of New York has revised the form of the performance bond that is required for City construction contracts that do not exceed \$5 million. The form of bond required for contracts that are greater than \$5 million has not changed. The City now has two approved forms. One form is to be used for contracts that do not exceed \$5 million and one form is to be used for contracts above \$5 million. The City's payment bond remains unchanged.

The new bond form for contracts that do not exceed \$5 million has been approved by the U.S. Small Business Administration ("SBA") for participation in their Bond Guarantee Program. The SBA's Bond Guarantee Program enables eligible small businesses to obtain or increase bonding by having the SBA act as a partial guarantor of the contractor to the surety. If you are interested in participating in this program, we suggest that you contact your broker or the SBA.

In order to maximize participation by small businesses in the SBA Guarantee Program, the City also encourages prime contractors who are awarded contracts greater than \$5 million to allow their subcontractors to use the SBA-approved form, particularly on contracts that are subject to Local Law 129 (the M/WBE program), if the prime contractor requires subcontractors to obtain performance bonds.

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
DEPARTMENT OF
DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

INFORMATION FOR BIDDERS

December 2013

THIS PAGE INTENTIONALLY LEFT BLANK

INFORMATION FOR BIDDERS

1. Description and Location of Work

The description and location of the work for which bids are requested are specified in Attachment 1, "Bid Information". Attachment 1 is included in the Bid Booklet.

2. Time and Place for Receipt of Bids

Sealed bids shall be received on or before the date and hour specified in Attachment 1, at which time they will be publicly opened and read aloud in the presence of the Commissioner or his or her representative, and any bidders who may desire to be present.

3. Definitions

The definitions set forth in the Procurement Policy Board Rules shall apply to this Invitation For Bids.

4. Invitation For Bids and Contract Documents

(A) Except for titles, sub-titles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience) the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of the Contract and the Invitation for Bids.

- (1) All provisions required by law to be inserted in this Contract, whether actually inserted or not
- (2) The Contract Drawings and Specifications
- (3) The General Conditions, the General Requirements and the Special Conditions, if any
- (4) The Contract
- (5) The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet
- (6) The Budget Director's Certificate; all Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed with the Work.

(B) For particulars as to this procurement, including quantity and quality of the purchase, extent of the work or labor to be performed, delivery and performance schedule, and any other special instructions, prospective bidders are referred to the Invitation For Bids Documents. A copy of such documents can be obtained at the location set forth in Attachment 1.

(C) Deposit for Copy of Invitation For Bids Documents: Prospective bidders may obtain a copy of the Invitation For Bids Documents by complying with the conditions set forth in the Notice of Solicitation. The deposit must be in the form of a check or money order made payable to the City of New York, and drawn upon a state or national bank or trust company, or a check of such bank or trust company signed by a duly authorized officer thereof.

(D) Return of Invitation For Bids Documents: All Invitation For Bids Documents must be returned to the Department upon request. If the bidder elects not to submit a bid thereunder, the Invitation For Bids Documents shall be returned to the Department, along with a statement that no bid will be submitted.

(E) Return of Deposit: Such deposit will be returned within 30 days after the award of the contract or the rejection of all bids as set forth in the advertisement, provided the Invitation For Bids Documents are returned to the location specified in Attachment 1, in physical condition satisfactory to the Commissioner.

(F) Additional Copies: Additional copies of the Invitation For Bids Documents may be obtained, subject to the conditions set forth in the advertisement for bids.

5. Pre-Bid Conference

A pre-bid conference shall be held as set forth in Attachment 1. Nothing stated at the pre-bid conference shall change the terms or conditions of the Invitation For Bids Documents, unless a change is made by written amendment as provided in Section 9 below. Failure to attend a mandatory pre-bid conference shall constitute grounds for the rejection of the bid.

6. Agency Contact

Any questions or correspondence relating to this bid solicitation shall be addressed to the Agency Contact person specified in Attachment 1.

7. Bidder's Oath

(A) The bid shall be properly signed by an authorized representative of the bidder and the bid shall be verified by the written oath of the authorized representative who signed the bid, that the several matters stated and information furnished therein are in all aspects true.

(B) A materially false statement willfully or fraudulently made in connection with the bid or any of the forms completed and submitted with the bid may result in the termination of any Contract between the City and the Bidder. As a result, the Bidder may be barred from participating in future City contracts as well as be subject to possible criminal prosecution.

8. Examination and Viewing of Site, Consideration of Other Sources of Information and Changed Conditions

(A) Pre-Bidding (Investigation) Viewing of Site - Bidders must carefully view and examine the site of the proposed work, as well as its adjacent area, and seek other usual sources of information, for they will be conclusively presumed to have full knowledge of any and all conditions on, about or above the site relating to or affecting in any way the performance of the work to be done under the Contract which were or should have been indicated to a reasonably prudent bidder. To arrange a date for visiting the work site, bidders are to contact the Agency Contact person specified in Attachment 1.

(B) Should the contractor encounter during the progress of the work subsurface conditions at the site materially differing from any shown on the Contract Drawings or indicated in the Specifications or such subsurface conditions as could not reasonably have been anticipated by the contractor and were not anticipated by the City, which conditions will materially affect the cost of the work to be done under the Contract, the attention of the Commissioner must be called immediately to such conditions before they are disturbed. The Commissioner shall thereupon promptly investigate the conditions. If he finds that they do so materially differ, or that they could not reasonably have been anticipated by the contractor and were not anticipated by the City, the Contract may be modified with his written approval.

9. Examination of Proposed Contract

(A) Request for Interpretation or Correction: Prospective bidders must examine the Contract Documents carefully and before bidding must request the Commissioner in writing for an interpretation or correction of every patent ambiguity, inconsistency or error therein which should have been discovered by a reasonably prudent bidder. Such interpretation or correction, as well as any additional contract provisions the Commissioner may decide to include, will be issued in writing by the Commissioner as an addendum to the Contract, which will be transmitted to each person recorded as having received a copy of the Contract Documents from the Department. Transmission of such addendum will be by mail, e-mail, facsimile or hand delivery. Such addendum will also be posted at the place where the Contract Documents are available for the inspection of prospective bidders. Upon transmission as provided for herein, such addendum shall become a part of the Contract Documents, and binding on all bidders, whether or not actual notice of such addendum is shown.

(B) Only Commissioner's Interpretation or Correction Binding: Only the written interpretation or correction so given by the Commissioner shall be binding, and prospective bidders are warned that no other officer, agent or employee of the City is authorized to give information concerning, or to explain or interpret, the Contract.

(C) Documents given to a subcontractor for the purpose of soliciting the subcontractor's bid shall include either a copy of the bid cover sheet or a separate information sheet setting forth the project name, the Contract number (if available), the contracting agency and the Project's location.

10. Form of Bid

Each bid must be submitted upon the prescribed form and must contain: a) the name, residence and place of business of the person or persons making the same; b) the names of all persons interested therein, and if no other person is so interested, such fact must be distinctly stated; c) a statement to the effect that it is made without any connection with any other person making a bid for the same purpose and that it is in all respects fair and without collusion or fraud; d) a statement that no Council member or other officer or employee or person whose salary is payable in whole or part from the City Treasury is directly or indirectly interested therein or in the supplies, materials or equipment and work or labor to which it relates, or in any portion of the profits thereof; e) a statement that the bidder is not in arrears to the City or to any agency upon a debt or contract or taxes, and is not a defaulter as surety or otherwise upon any obligation to the City to any agency thereof, except as set forth in the bid.

THE BID SHALL BE TYPEWRITTEN OR WRITTEN LEGIBLY IN INK. THE BID SHALL BE SIGNED IN INK. ERASURES OR ALTERATIONS SHALL BE INITIALED BY THE SIGNER IN INK. FAILURE TO CONFORM TO THE REQUIREMENTS OF THIS SECTION 10 SHALL RESULT IN THE REJECTION OF THE BID.

11. Irrevocability of Bid

The prices set forth in the bid cannot be revoked and shall be effective until the award of the Contract, unless the bid is withdrawn as provided for in Sections 15 and 18 below.

12. Acknowledgment of Amendments

The receipt of any amendment to the Contract Documents shall be acknowledged by the bidder in its bid submission.

13. Bid Samples and Descriptive Literature

Bid samples and descriptive literature shall not be submitted by the bidder, unless expressly requested elsewhere in the Contract or Contract Documents. Any unsolicited bid samples or descriptive literature which are submitted shall not be examined or tested and shall not be deemed to vary any of the provisions of this Contract.

14. Proprietary Information/Trade Secrets

(A) The bidder shall identify those portions of the bid which it deems to be confidential, proprietary information or trade secrets, and provide justification why such materials shall not be disclosed by the City. All such materials shall be clearly indicated by stamping the pages on which such information appears, at the top and bottom thereof with the word "Confidential". Such materials stamped "Confidential" must be easily separable from the non-confidential sections of the bid.

(B) All such materials so indicated shall be reviewed by the Agency and any decision not to honor a request for confidentiality shall be communicated in writing to the bidder. For those bids which are unsuccessful, all such confidential materials shall be returned to the bidder. Prices, makes and model or catalog numbers of the items offered, deliveries, and terms of payment shall be publicly available after bid opening, regardless of any designation of confidentiality made by the bidder.

15. Pre-Opening Modification or Withdrawal of Bids

Bids may be modified or withdrawn by written notice received in the office designated in Attachment 1, before the time and date set for the bid opening. If a bid is withdrawn in accordance with this Section, the bid security, if any, shall be returned to the bidder.

16. Bid Evaluation and Award

In accordance with the New York City Charter, the Procurement Policy Board Rules and the terms and conditions of this Invitation For Bids, this Contract shall be awarded, if at all, to the responsible bidder whose bid meets the requirements and evaluation criteria set forth in the Invitation For Bids, and whose bid price is either the most favorable bid price or, if the Invitation For Bids so states, the most favorable evaluated bid price. A bid may not be evaluated for any requirement or criterion that is not disclosed in the Invitation For Bids.

Restriction: No negotiations with any bidder shall be allowed to take place except under the circumstances and in the manner set forth in Section 21. Nothing in this Section shall be deemed to permit a contract award to a bidder submitting a higher quality item than that designated in the Invitation For Bids, if that bid is not also the most favorable bid.

17. Late Bids, Late Withdrawals and Late Modifications

Any bid received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. Any request for withdrawal or modification received at the place designated in the solicitation after the time and date set for receipt of bids is late and shall not be considered. The exception to this provision is that a late modification of a successful bid that makes the bid terms more favorable to the City shall be considered at any time it is received.

18. Withdrawal of Bids.

Except as provided for in Section 15, above, a bidder may not withdraw its bid before the expiration of forty-five (45) days after the date of the opening of bids; thereafter, a bidder may withdraw its bid only in writing and in advance of an actual award. If within sixty (60) days after the execution of the Contract, the Commissioner fails to fix the date for commencement of work by written notice to the bidder, the bidder, at his option, may ask to be relieved of his obligation to perform the work called for by written notice to the Commissioner. If such notice is given to the Commissioner, and the request to withdraw is granted, the bidder waives all claims in connection with this Contract.

19. Mistake in Bids

(A) Mistake Discovered Before Bid Opening: A bidder may correct mistakes discovered before the time and date set for bid opening by withdrawing or correcting the bid as provided in Section 15 above.

(B) Mistakes Discovered Before Award

(1) In accordance with General Municipal Law (Section 103, subdivision 11), where a unilateral error or mistake is discovered in a bid, such bid may be withdrawn upon written approval of the Agency Chief Contracting Officer if the following conditions are met:

- (a) The mistake is known or made known to the agency prior to the awarding of the Contract or within 3 days after the opening of the bid, whichever period is shorter; and
- (b) The price bid was based upon an error of such magnitude that enforcement would be unconscionable; and

- (c) The bid was submitted in good faith and the bidder submits credible evidence that the mistake was a clerical error as opposed to a judgment error; and
- (d) The error in the bid is actually due to an unintentional and substantial arithmetic error or an unintentional omission of a substantial quantity of work, labor, material or services made directly in the compilation of the bid, which unintentional arithmetic error or unintentional omission can be clearly shown by objective evidence drawn from inspection of the original work paper, documents, or materials used in the preparation of the bid sought to be withdrawn; and
- (e) It is possible to place the agency in the same position as existed prior to the bid.

(2) Unless otherwise required by law, the sole remedy for a bid mistake in accordance with this Article shall be withdrawal of the bid, and the return of the bid bond or other security, if any, to the bidder. Thereafter, the agency may, in its discretion, award the Contract to the next lowest bidder or rebid the Contract. Any amendment to or reformation of a bid or a Contract to rectify such an error or mistake therein is strictly prohibited.

(3) If the mistake and the intended correct bid are clearly evident on the face of the bid document, the bid shall be corrected to the intended correct bid and may not be withdrawn. Examples of mistakes that may be corrected are typographical errors, errors in extending unit prices, transposition errors and arithmetical errors.

20. Low Tie Bids

(A) When two or more low responsive bids from responsible bidders are identical in price, meeting all the requirements and criteria set forth in the Invitation For Bids, the Agency Chief Contracting Officer will break the tie in the following manner and order of priority:

- (1) Award to a certified New York City small, minority or woman-owned business entity bidder;
- (2) Award to a New York City bidder;
- (3) Award to a certified New York State small, minority or woman-owned business bidder;
- (4) Award to a New York State bidder.

(B) If two or more bidders still remain equally eligible after application of paragraph (A) above, award shall be made by a drawing by lot limited to those bidders. The bidders involved shall be invited to attend the drawing. A witness shall be present to verify the drawing and shall certify the results on the bid tabulation sheet.

21. Rejection of Bids

(A) Rejection of Individual Bids: The Agency may reject a bid if:

- (1) The bidder fails to furnish any of the information required pursuant to Section 24 or 28 hereof; or if
- (2) The bidder is determined to be not responsible pursuant to the Procurement Policy Board Rules; or if
- (3) The bid is determined to be non-responsive pursuant to the Procurement Policy Board Rules; or if
- (4) The bid, in the opinion of the Agency Chief Contracting Officer, contains unbalanced bid prices and is thus non-responsive, unless the bidder can show that the prices are not unbalanced for the probable required quantity of items, or if the imbalance is corrected pursuant to Section 15.

(B) Rejection of All Bids: The Agency, upon written approval by the Agency Chief Contracting Officer, may reject all bids and may elect to resolicit bids if in its sole opinion it shall deem it in the best interest of the City so to do.

(C) Rejection of All Bids and Negotiation With All Responsible Bidders: The Agency Head may determine that it is appropriate to cancel the Invitation For Bids after bid opening and before award and to complete the acquisition by negotiation. This determination shall be based on one of the following reasons:

- (1) All otherwise acceptable bids received are at unreasonable prices, or only one bid is received and the Agency Chief Contracting Officer cannot determine the reasonableness of the bid price, or no responsive bid has been received from a responsible bidder; or
- (2) In the judgment of the Agency Chief Contracting Officer, the bids were not independently arrived at in open competition, were collusive, or were submitted in bad faith.

(D) When the Agency has determined that the Invitation for Bids is to be canceled and that use of negotiation is appropriate to complete the acquisition, the contracting officer may negotiate and award the Contract without issuing a new solicitation, subject to the following conditions:

- (1) prior notice of the intention to negotiate and a reasonable opportunity to negotiate have been given by the contracting officer to each responsible bidder that submitted a bid in response to the Invitation for Bids;
- (2) the negotiated price is the lowest negotiated price offered by a responsible bidder; and
- (3) the negotiated price is lower than the lowest rejected bid price of a responsible bidder that submitted a bid in response to the Invitation for Bids.

22. Right to Appeal Determinations of Non-Responsiveness or Non-Responsibility and Right to Protest Solicitations and Award

The bidder has the right to appeal a determination of non-responsiveness or non-responsibility and has the right to protest a solicitation and award. For further information concerning these rights, the bidder is directed to the Procurement Policy Board Rules.

23. Affirmative Action and Equal Employment Opportunity

This Invitation For Bids is subject to applicable provisions of Federal, State and Local Laws and executive orders requiring affirmative action and equal employment opportunity.

24. VENDEX Questionnaires

(A) Requirement: Pursuant to Administrative Code Section 6-116.2 and the PPB Rules, bidders may be obligated to complete and submit VENDEX Questionnaires. Generally, if this bid is \$100,000 or more, or if this bid when added to the sum total of all contracts, concessions and franchises the bidder has received from the City and any subcontracts received from City contractors over the past twelve months, equals or exceeds \$100,000, Vendex Questionnaires must be completed. If required, Vendex Questionnaires must be completed and submitted before any award of contract may be made or before approval is given for a proposed subcontractor. Non-compliance with these submission requirements may result in the disqualification of the bid, disapproval of a subcontractor, subsequent withdrawal of approval for the use of an approved subcontractor, or the cancellation of the contract after its award.

(B) Submission: Vendex Questionnaires must be submitted directly to the Mayor's Office of Contract Services, ATTN: Vendex, 253 Broadway, 9th Floor, New York, New York 10007. In addition, the bidder must submit a Confirmation of Vendex Compliance to the agency. A form for this confirmation is set forth in the Bid Booklet.

(C) Obtaining Forms: Vendex Questionnaires, as well as detailed instructions, may be obtained at www.nyc.gov/vendex. The bidder may also obtain Vendex forms and instructions by contacting the Agency Chief Contracting Officer or the contact person for this contract.

25. Complaints About the Bid Process

The New York City Comptroller is charged with the audit of contracts in New York City. Any vendor who believes that there has been unfairness, favoritism or impropriety in the bid process should inform the Comptroller, Office of Contract Administration, One Centre Street, Room 835, New York, New York; telephone number (212)669-2797.

26. Bid, Performance and Payment Security

(A) Bid Security: Each bid must be accompanied by bid security in an amount and type specified in Attachment 1. The bid security shall assure the City of New York of the adherence of the bidder to its proposal, the execution of the Contract, and the furnishing of Performance and Payment Bonds by the bidder, if required in Attachment 1. Bid security shall be returned to the bidder as follows:

- (1) Within ten (10) days after the bid opening, the Comptroller will be notified to return the deposits of all but the three (3) lowest bidders. Within five (5) days after the award, the Comptroller will be notified to return the deposits of the remaining two unsuccessful bidders.
- (2) Within five (5) days after the execution of the Contract and acceptance of the Contractor's bonds, the Comptroller will be notified to return the bid security of the successful bidder or, if performance and payment bonds are not required, only after the sum retained under Article 21 of the Contract equals the amount of the bid security.
- (3) Where all bids are rejected, the Comptroller will be notified to return the deposit of the three (3) lowest bidders at the time of rejection.

(B) Performance and Payment Security: Performance and Payment Security must be provided in an amount and type specified in Attachment 1. The performance and payment security shall be delivered by the contractor prior to or at the time of execution of the Contract. If a contractor fails to deliver the required performance and payment security, its bid security shall be enforced, and an award of Contract may be made to the next lowest responsible and responsive bidder, or the contract may be rebid.

(C) Acceptable Types of Security: Acceptable types of security for bids, performance, and payment shall be limited to the following:

- (1) a one-time bond in a form satisfactory to the City;
- (2) a bank certified check or money order;
- (3) obligations of the City of New York; or
- (4) other financial instruments as determined by the Office of Construction in consultation with the Comptroller.

Whenever the successful bidder deposits obligations of the City of New York as performance and payment security, the Comptroller may sell and use the proceeds thereof for any purpose for which the principal or surety on such bond would be liable under the terms of the Contract. If the money is deposited with the Comptroller, the successful bidder shall not be entitled to receive interest on such money from the City.

(D) Form of Bonds: Security provided in the form of bonds must be prepared on the form of bonds authorized by the City of New York. Forms for bid, performance, and payment bonds are included in the Invitation for Bids Documents. Such bonds must have as surety thereunder such surety company or companies as are: (1) approved by the City of New York; (2) authorized to do business in the State of New York, and (3) approved by the Department of the Treasury of the United States. Premiums for any required bonds must be included in the base bid.

The bidder is advised that submission of a bid bond where the surety on such bond fails to meet the criteria set forth herein, shall result in the rejection of the bid as non-responsive.

The Department of the Treasury of the United States advises that information concerning approved surety companies may be obtained as follows: (1) from the Government Printing Office at 202-512-1800; (2) through the Internet at <http://www.fms.treas.gov/c570/index.html>, and (3) through a computerized public bulletin board, which can be accessed by using your computer modem and dialing 202-874-6887.

(E) Power of Attorney: Attorneys in fact who sign bid, performance, or payment bonds must file with each bond a certified copy of their power of attorney to sign said bonds.

27. Failure to Execute Contract

In the event of failure of the successful bidder to execute the Contract and furnish the required security within ten (10) days after notice of the award of the Contract, the deposit of the successful bidder or so much thereof as shall be applicable to the amount of the award made shall be retained by the City, and the successful bidder shall be liable for and hereby agrees to pay on demand the difference between the price bid and the price for which such Contract shall be subsequently awarded, including the cost of any required reletting and less the amount of such deposit. No plea of mistake in such accepted bid shall be available to the bidder for the recovery of the deposit or as a defense to any action based upon such accepted bid. Further, should the bidder's failure to comply with this Section cause any funding agency, body or group (Federal, State, City, Public, Private, etc.) to terminate, cancel or reduce the funding on this project, the bidder in such event shall be liable also to the City for the amount of actual funding withdrawn by such agency on this project, less the amount of the forfeited deposit.

28. Bidder Responsibilities and Qualifications

(A) Bidders must include with their bids all information necessary for a determination of bidder responsibility, as set forth in the Specifications.

(B) The Agency may require any bidder or prospective bidder to furnish all books of account, records, vouchers, statements or other information concerning the bidder's financial status for examination as may be required by the Agency to ascertain the bidder's responsibility and capability to perform the Contract. If required, a bidder must also submit a sworn statement setting forth such information as the Agency may require concerning present and proposed plant and equipment, the personnel and qualifications of his working organizations, prior experience and performance record.

(C) Oral Examination on Qualifications: In addition thereto, and when directed by the Agency, the bidder, or a responsible officer, agent or employee of the bidder, must submit to an oral examination to be conducted by the Agency in relation to his proposed tentative plan and schedule of operations, and such other matters as the Agency may deem necessary in order to determine the bidder's ability and responsibility to perform the work in accordance with the Contract. Each person so examined must sign and verify a stenographic transcript of such examination noting thereon such corrections as such person may desire to make.

(D) If the bidder fails or refuses to supply any of the documents or information set forth in paragraph (B) hereof or fails to comply with any of the requirements thereof, the Agency may reject the bid.

29. Employment Report

In accordance with Executive Order No. 50 (1980) as modified by Executive Order 108 (1986), the filing of a completed Employment Report (ER) is a requirement of doing business with the City of New York for construction contractors with contracts of \$1,000,000 or more and subcontractors with construction subcontracts of \$750,000 or more. The required forms and information are included in the Bid Booklet.

30. Labor Law Requirements

(A) General: The successful bidder will be required to comply strictly with all Federal, State and local labor laws and regulations.

(B) New York State Labor Law: This Contract is subject to New York State Labor Law Section 220, which requires that construction workers on the site be paid prevailing wages and supplements. The Contractor is reminded that all wage provisions of this Contract will be enforced strictly and failure to comply will be considered when evaluating performance. Noncompliance may result in the contractor being debarred by the City from future contracts. Complaints filed with the Comptroller may result in decisions which may debar a contractor from bidding contracts with any state governmental entity and other political subdivisions.

(C) Records: The Contractor is expected to submit accurate payroll reports and other required documents and verify attendance and job classifications being utilized in compliance with the law, Contract provisions and agency procedures.

31. Insurance

(A) Bidders are advised that the insurance requirements contained herein are regarded as material terms of the Contract. As required by Article 22 of the Contract, the contractor must effect and maintain with companies licensed and authorized to do business in the State of New York, the types of insurance set forth therein, when required by and in the amounts set forth in Schedule A of the General Conditions. Such required insurance must be provided from the date the contractor is ordered to commence work and up to the date of final acceptance of all required work.

(B) The contractor must, within ten days of receipt of the notice of award, submit the following insurance documentation: (a) original certificate of insurance for general liability in the amount required by Schedule A of the General Conditions, and (b) original certificates of insurance or other proof of coverage for workers' compensation and disability benefits, as required by Section 57 of the New York State Workers' Compensation Law and Section 220 of the Disability Benefits Law.

32. Lump Sum Contracts

(A) Comparison of Bids: Bids on Lump Sum Contracts will be compared on the basis of the lump sum price bid, adjusted for alternate prices bid, if any.

(B) Lump Sum Bids for "General Construction Work" which include excavation shall include all necessary excavation work defined in the Specifications as being included in the lump sum bid. The bidder shall also bid a unit price for the additional cost of excavating material which is defined in the Specifications as excavation for which additional payment will be made. The total estimated additional cost of removing such material will be taken as the quantity set forth in the Engineer's Estimate multiplied by the unit price bid. This total estimated cost of additional excavation shall be added to the lump sum bid for the General Construction Work for the purpose of comparing bids to determine the low bidder.

(C) Variations from Engineer's Estimate: The Engineer's Estimate of the quantity of excavation for which additional payment will be made is approximate only and is given solely to be used as a uniform basis for the comparison of bids and such estimate is not to be considered as part of this contract. The quantities actually required to complete the contract work may be more or less than the quantities in the Engineer's Estimate and, if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

33. Unit Price Contracts

(A) Comparison of Bids: Bids on Unit Price Contracts will be compared on the basis of a total estimated price, arrived at by taking the sum of the estimated quantities of such items, in accordance with the Engineer's Estimate of Quantities set forth in the Bid Form, multiplied by the corresponding unit prices, and including any lump sum bids on individual items.

(B) Variations from Engineer's Estimate: Bidders are warned that the Engineer's Estimate of Quantities on the various items of work and materials is approximate only, given solely to be used as a uniform basis for the comparison of bids, and is not be considered part of this contract. The quantities actually required to complete the contract work may be less or more than so estimated, and if so, no action for damages or for loss of profits shall accrue to the contractor by reason thereof.

(C) Overruns: The terms and conditions applicable to overruns of unit price items are set forth in Article 26 of the Contract.

34. Excise Tax

Bidders are referred to the Specifications for information on Federal Excise Tax exemptions.

35. Licenses and Permits

The successful bidder will be required to obtain all necessary licenses and permits necessary to perform the work.

36. Multiple Prime Contractors

If more than one prime contractor will be involved on this project, all contractors are required to examine the Invitation for Bid packages for all other parts of the project.

37. Locally Based Enterprise Requirements (LBE)

This Contract is subject to the requirements of Administrative Code, Section 6-108.1, and the regulations promulgated thereunder. No construction contract will be awarded unless and until these requirements have been complied with in their entirety. The bidder is advised of the provisions set forth below, as well as the provisions with respect to the Locally Based Enterprise Program contained in Article 67 of the Contract. The contractor is advised that:

(A) If any portion of the Contract is subcontracted, not less than ten percent of the total dollar amount of the contract shall be awarded to locally based enterprises ("LBEs"); except, where less than ten percent of the total dollar amount of the Contract is subcontracted, such lesser percentage shall be so awarded.

(B) No contractor shall require performance and payment bonds from LBE subcontractors.

(C) No Contract shall be awarded unless the contractor first identifies in its bid:

- (1) the percentage, dollar amount and type of work to be subcontracted; and
- (2) the percentage, dollar amount and type of work to be subcontracted to LBEs.

(D) Within ten calendar days after notification of low bid, the apparent low bidder shall submit an "LBE Participation Schedule" to the contracting agency. If such schedule does not identify sufficient LBE subcontractors to meet the requirements of Administrative Code Section 6-108.1, the apparent low bidder shall submit documentation of its good faith efforts to meet such requirements.

(1) The "LBE Participation Schedule" shall include:

- (a) the name and address of each LBE that will be given a subcontract,
- (b) the percentage, dollar amount and type of work to be subcontracted to the LBE, and
- (c) the dates when the LBE subcontract work will commence and end.

- (2) The following documents shall be attached to the "LBE Participation Schedule":
 - (a) verification letters from each subcontractor listed in the "LBE Participation Schedule" stating that the LBE will enter into a formal agreement for work,
 - (b) certification documents of any proposed LBE subcontractor which is not on the LBE certified list, and
 - (c) copies of the certification letter of any proposed subcontractor which is an LBE.

- (3) Documentation of good faith efforts to achieve the required LBE percentage shall include as appropriate but not limited to the following:
 - (a) attendance at prebid meetings, when scheduled by the agency, to advise bidders of contract requirements;
 - (b) advertisement where appropriate in general circulation media, trade association publications and small business media of the specific subcontracts that would be at least equal to the percentage goal for LBE utilization specified by the contractor;
 - (c) written notification to association of small, minority and women contractors soliciting specific subcontractors;
 - (d) written notification by certified mail to LBE firms that their interest in the contract is solicited for specific work items and their estimated values;
 - (e) demonstration of efforts made to select portions of the work for performance by LBE firms in order to increase the likelihood of achieving the stated goal;
 - (f) documented efforts to negotiate with LBE firms for specific subcontracts, including at a minimum:
 - (i) The names, address and telephone numbers of LBE firms that are contacted;
 - (ii) A description of the information provided to LBE firms regarding the plans and specifications for portions of the work to be performed;
 - (iii) Documentation showing that no reasonable price can be obtained from LBE firms;
 - (iv) A statement of why agreements with LBE firms were not reached;
 - (g) a statement of the reason for rejecting any LBE firm which the contractor deemed to be unqualified; and
 - (h) documentation of efforts made to assist the LBE firms contacted that needed assistance in obtaining required insurance.

(E) Unless otherwise waived by the Commissioner with the approval of the Office of Economic and Financial Opportunity, failure of a proposed contractor to provide the information required by paragraphs (C) and (D) above may render the bid non-responsive and the Contract may not be awarded to the bidder. If the contractor states that it will subcontract a specific portion of the work, but can demonstrate despite good faith efforts it cannot achieve its required LBE percentage for subcontracted work until after award of Contract, the Contract may be awarded, subject to a letter of compliance from the contractor stating that it will comply with Administrative Code Section 6-108.1 and subject to approval by the Commissioner. If the contractor has not met its required LBE percentage prior to award, the contractor shall demonstrate that a good faith effort has been made subsequent to award to obtain LBEs on each subcontract until it meets the required percentage.

(F) When a bidder indicates prior to award that no work will be subcontracted, no work may be subcontracted without the prior written approval of the Commissioner, which shall be granted only if the contractor in good faith seeks LBE subcontractors at least six weeks prior to the start of work.

(G) The contractor may not substitute or change any LBE which was identified prior to award of the contract without the written permission of the Commissioner. The contractor shall make a written application to the Commissioner for permission to make such substitution or change, explaining why the contractor needs to change its LBE subcontractor and how the contractor will meet its LBE subcontracting requirement. Copies of such application must be served on the originally identified LBE by certified mail return receipt requested, as well as the proposed substitute LBE. The Commissioner shall determine whether or not to grant the contractor's request for substitution.

38. Bid Submission Requirements

The Bid Submission Requirements are set forth on page 2 of the Bid Booklet.

39. Comptroller's Certificate

This Contract shall not be binding or of any force unless it is registered by the Comptroller in accordance with Section 328 of the City Charter and the Procurement Policy Board Rules. This Contract shall continue in force only after annual appropriation of funds by the City of New York and certification as hereinabove set forth.

40. Procurement Policy Board Rules

This Invitation For Bids is subject to the Rules of the Procurement Policy Board of the City of New York. In the event of a conflict between said Rules and a provision of this Invitation For Bids, the Rules shall take precedence.

41. DDC Safety Requirements

The DDC Safety Requirements apply to the work to be performed pursuant to the Contract. The DDC Safety Requirements are set forth on the following pages.

CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
SAFETY REQUIREMENTS

THE DDC SAFETY REQUIREMENTS INCLUDE THE FOLLOWING SECTIONS:

- I. POLICY ON SITE SAFETY**
- II. PURPOSE**
- III. DEFINITIONS**
- IV. RESPONSIBILITIES**
- V. SAFETY QUESTIONNAIRE**
- VI. SAFETY PROGRAM AND SITE SAFETY PLAN**
- VII. KICK-OFF/PRE-CONSTRUCTION MEETINGS AND SAFETY REVIEW**
- VIII. EVALUATION DURING WORK IN PROGRESS**
- IX. SAFETY PERFORMANCE EVALUATION**

THIS PAGE INTENTIONALLY LEFT BLANK

I. POLICY ON SITE SAFETY

The City of New York Department of Design and Construction (DDC) is committed to a policy of injury and illness prevention and risk management for construction work that will ensure the safety and health of the workers engaged in the projects and the protection of the general public. Therefore, it is DDC's policy that work carried out by Contractors on DDC jobsites must, at a minimum, comply with applicable federal, state and city laws, rules and regulations, including without limitation:

- ❑ U. S. Department of Labor 29 Code of Federal Regulations (CFR) Part 1926 and applicable Sub-parts of Part 1910 – U.S. Occupational Safety and Health Administration (OSHA) including, but not limited to “Respiratory Protection” (29 CFR 1910.134), “Permit-Required Confined Spaces” (29 CFR 1910.146), and “Hazard Communication” (29 CFR 1910.1200);
- ❑ New York State Department of Labor Industrial Code Rule 23 – Protection in Construction, Demolition and Excavation;
- ❑ New York City Construction Codes, Title 28
- ❑ NYC Department of Transportation Title 34 Chapter 2 – Highway Rules
- ❑ New York State Department of Labor Industrial Code Rule 753
- ❑ NYC Local Law No. 113 (2005) Noise Control Code

In addition, all regulations promulgated by the NYC Department of Transportation, including requirements for Maintenance and Protection of Traffic (MPT), are applicable when contained in contract specifications. While MPT is a significant component of work in our Infrastructure Division, it does not supersede or exempt Contractors from complying with other applicable health and safety standards (for example, excavating and trenching standards, operation of heavy equipment and compliance with City environmental and noise regulations).

I. PURPOSE

The purpose of this policy is to ensure that Contractors perform their work and supervise their employees in accordance with all applicable federal, state and city rules and regulations. Further, Contractors will be expected to minimize or eliminate jobsite and public hazard, through a planning, inspection, auditing and corrective action process. The goal is to control risks so that injuries, illnesses and accidents to contractors' employees, DDC employees and the general public, as well as damage to city-owned and private property, are reduced to the lowest level feasible.

III. DEFINITIONS

Agency Chief Contracting Officer (ACCO): The ACCO shall mean the person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO.

Competent Person: As defined by OSHA, an individual who is capable of identifying existing and predictable hazards in the surroundings or working conditions that are unsanitary, hazardous, or dangerous to employees or the general public, and who has authorization to take prompt corrective measures to eliminate them.

Construction Safety Auditor: A representative of the QACS Construction Safety Unit who provides inspection and assessment services to enhance health and safety on all DDC construction projects. The activities of the Construction Safety Auditor include performing site surveys, reviewing health and safety plans, reviewing construction permits, and rendering technical advice and assistance to DDC Resident Engineers and Project Managers.

Construction Safety Unit: A part of QACS within the Division of Technical Support that assesses contractor safety on DDC jobsites and advises responsible parties of needed corrective actions.

Construction Superintendent: A representative of the contractor responsible for overseeing performance of the required construction work. This individual must engage in sound construction practices, and is responsible to maintain a safe work site. In the case of a project involving the demolition, alteration or new construction of buildings, the Construction Superintendent must be licensed by the NYC Department of Buildings.

Contractor: For purposes of these Safety Requirements, the term "Contractor" shall mean any person or entity that enters into a contract for the performance of construction work on a DDC project. The term "Contractor" shall include any person or entity which enters into any of the following types of contracts: (1) a prime construction contract for a specific project, (2) a prime construction contract using the Job Order Contracting System ("JOCS Contract"), and (3) a subcontract with a CM/Builder ("First Tier Subcontract").

Director - Quality Assurance and Construction Safety (QACS): Responsible for the operations of the QACS Construction Safety Unit and the DDC Site Safety management programs.

Job Hazard Assessment (JHA): A process of identifying site-specific hazards that may be present during construction and establishing the means and methods to reduce or eliminate those hazards.

Jobsite Safety Coordinator: A person designated by the Contractor to be onsite during all activities. This individual shall have received, at a minimum, the OSHA 10-hour construction safety program. Other examples of acceptable training are the 30-hour OSHA Safety and Health Standards for the Construction Industry training program (OSHA 510) or a degree/certificate in a safety and health from a college-level curriculum. This person does not necessarily have to be dedicated full-time to site safety, but must have sufficient experience and authority to undertake corrective action and must qualify to be a competent person. For certain projects, as defined in NYC Construction Codes – Title 28, this person may be required to have a Site Safety Manager's License issued by the NYC DOB.

Qualified Person: As defined by OSHA, an individual who, by possession of a recognized degree, certificate, license or professional standing, or who by extensive knowledge, training, and experience, has successfully demonstrated his or her ability to solve problems relating to the subject matter, the work, or the project. Qualified Persons are required under regulation to address issues pertaining, but without limit, to fall protection, scaffold design and trenching and shoring, among others.

Resident Engineer (RE) / Construction Project Manager (CPM): Representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the work. (The RE/CPM may be a third-party consultant, including a CM, retained by DDC.)

Safety Program: Established by the Contractor that covers all operations of that Contractor and establishes the Contractor's overall safety policy, regulatory compliance plan and minimum safety standards. The Safety Program must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

Safety Questionnaire: Used by DDC to evaluate Contractor's current and past safety performance. It is required to be completed by all Contractors initially when submitting bids for Construction work, or when being pre-qualified and updated annually or as requested by the DDC.

Site Safety Plan: A site-specific safety plan developed by the Contractor for a specific project. The Site Safety Plan must identify hazards associated with the project, and include specific safety precautions and training appropriate and necessary to complete the work. The Site Safety Plan must be submitted prior to the commencement of work at the site and is subject to review and acceptance by the Construction Safety Unit.

Unsafe or Unhealthy Condition: A condition that could be potentially hazardous to the health and safety of personnel or the public, and/or damaging to equipment, machinery, property or the environment.

Weekly Safety Meetings: Weekly documented jobsite safety meetings, given to all jobsite personnel by contractor, with the purpose of discussing general safety topics and job specific requirements encountered at the DDC work site.

IV. RESPONSIBILITIES

All persons who manage, perform, and provide support for construction projects shall conduct operations in compliance with the requirements identified in this Policy and all applicable governing regulatory agency requirements and guidelines pertaining to safety in construction.

A. Resident Engineer / Construction Project Manager / Construction Manager

- Monitors the issuance of safety- related permits, approvals and drawings and maintains copies on site.
- Monitors construction-related work activities to confirm that they are conducted in accordance with DDC policies and all applicable regulations that pertain to construction safety.
- Maintains documentation and periodically attends weekly safety meeting.
- Notifies the Construction Safety Unit and the ACCO's Insurance and Risk Management Unit of project- related accidents and emergencies, as per DDC's Construction Safety Emergency Protocol.
- Gathers facts related to all accidents and prepares DDC Accident Reports.
- Notifies the Construction Safety Unit of outside regulatory agency inspections and forwards a copy of the inspection report within three days of its receipt.
- Monitors the conditions at the site for conformance with the Site Safety Plan and DDC construction documents.
- Notifies the contractor and DDC in the event that any condition or activity exists that is not in compliance with the Site Safety Plan, applicable federal, state or local codes or any condition that presents a potential risk of injury to the public or workers or possible damage to property.
- Notifies DDC of any emergency condition and directs the contractor to provide such labor, materials, equipment and supervision to abate such conditions.
- Reports gross safety violations to the Construction Safety Unit immediately.

A. Contractors

- Complete a Safety Questionnaire and submit with its bid or as part of a pre-qualification package.
- Provide a Written Job Hazard Assessment (JHA) that identifies expected safety issues of the work to be performed. JHA shall be included with the Site Safety Plan submitted by the contractor.
- Submit a Site Safety Plan and Safety Program within 15 days of issuance of the Notice to Proceed, or as otherwise directed. The Site Safety Plan and Safety Program are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. The Site Safety Plan shall be revised and updated as necessary.
- Ensure that all employees are aware of the hazards associated with the project through formal and informal training and/or other communications. Conduct and document weekly safety meetings for the duration of the project. Documentation to be provided to the RE/CPM/CM on a monthly basis.
- Name a Construction Superintendent, if required.
- Name a Job Site Safety Coordinator. The Contractor will be required to identify the Job Site Safety Coordinator in the Site Safety Plan.
- Comply with all mandated federal, state and local safety and health rules and regulations.
- Comply with all provisions of the Site Safety Plan.
- As part of the Site Safety Plan, prepare a site specific MPT (if not otherwise provided in the contract documents) and comply with all of its provisions.
- Conduct and document site-specific safety orientation for Contractor personnel to review the hazards associated with the project as identified in the Site Safety Plan and the specific safety procedures and controls that will be used to protect workers, the general public and property. The Job Site Safety Coordinator will conduct this training prior to mobilization and provide documentation to the RE/CPM/CM.
- Provide, replace and adequately maintain at or around the project site, suitable and sufficient signage, lights, barricades and enclosures (fences, sidewalk sheds, netting, bracing, etc.).
- Report unsafe conditions or hazards to the DDC RE/CPM/CM as soon as practical, but no more than 24 hours after discovery, and take action to remove or abate such conditions.

- Report any accident involving injuries to workers or the general public, as well as property damage, to the DDC RE/CPM/CM within two (2) hours.
- Notify the DDC RE/CPM/CM within two (2) hours of the start of an inspection by any regulatory agency personnel, including OSHA.
- Maintain all records pertaining to all required compliance documents and accident and injury reports.
- Respond to DDC recommendations on safety, which shall in no way relieve the Contractor of its responsibilities for safety on the project. The Contractor has sole responsibility for safety.

V. SAFETY QUESTIONNAIRE

DDC requires that all Contractors provide information regarding their current and past safety and environmental performance and programs. This will be accomplished by the use of the DDC Safety Questionnaire. As a part of the bid submittal package, the contractor must submit a completed DDC Safety Questionnaire listing their workers' compensation experience modification rating and OSHA Incidence Rates for the three (3) years prior to the date of the bid opening. DDC may request a Contractor to update its Questionnaire at any time or to provide more detailed information. The Contractor must provide the requested update within 30 days.

The following criteria will be used by DDC in reviewing the Contractor's responsibility, which will be based on the information provided on the questionnaire:

- Criteria 1: OSHA Injury and Illness Rates (I&IR) are no greater than the average for the industry (based on the most current Bureau of Labor Statistics data for the Contractors SIC code); and
- Criteria 2: Insurance workers compensation Experience Modification Rate (EMR) equal to or less than 1.0; and
- Criteria 3: Any willful violations issued by OSHA or NYC DOB within the last three years; and
- Criteria 4: A fatality (worker or member of public) experienced on or near Contractor's worksite within the last three (3) years; and
- Criteria 5: An unacceptable rating by QACS based on past performance on DDC projects; and
- Criteria 6: Contractor has in place an acceptable corporate safety program and its employees shall have completed all documented relative safety training; and
- Criteria 7: Contractor shall provide OSHA Injury Records (currently OSHA 300 Log) for the last three (3) years.

If the Contractor fails to meet the basic criteria listed above, the Construction Safety Unit may request, through the ACCO, more detail concerning the Contractor's safety experience. DDC may request the Contractor to provide copies of, among other things, OSHA records, OSHA and DOB citations, EPA citations and written Safety Programs.

VI. SAFETY PROGRAM AND SITE SAFETY PLAN

Within fifteen (15) days of issuance of the Notice to Proceed, or as otherwise directed, the Contractor shall submit the following: (1) Safety Program, and (2) Site Safety Plan. The Safety Program shall set forth the Contractor's overall safety policy, regulatory compliance plan and minimum safety standard, and the Site Safety Plan shall identify hazards associated with the project, and include specific safety precautions and training appropriate and necessary to complete the work. The Safety Program and the Site Safety Plan are subject to review and acceptance by the Construction Safety Unit prior to the commencement of work at the site. Failure by the contractor to submit an acceptable Site Safety Plan and Safety Program shall be grounds for default.

The Site Safety Plan shall apply to all Contractor and subcontractor operations, and shall have at a minimum, the following elements. Each element shall be described in a separate section in the written document. It may be necessary to modify the basic format for certain unique or high-risk projects (such as tunnels or high-rise construction). The basic elements are as follows:

1. **Responsibility and Organization:** Identify the person or persons with authority and responsibility for implementing the Site Safety Plan. Provide an organization chart and define levels of authority and responsibility. Identify the Competent Person, the Construction Superintendent (if required), the Job Safety Coordinator and the Qualified Person required for this project.
2. **Communication:** Establish a system for communicating with employees and subcontractors on matters relating to worker and public safety and health and environmental protection, including provisions designed to encourage employees to inform the employer of hazards at the worksite without fear of reprisal. An emergency response notification protocol is to be established that also includes after hours contact numbers. The plan must also include provisions for weekly safety meetings held by the Job Site Safety Coordinator.
3. **Job Hazard Assessment:** A written document submitted by the contractor, used to identify expected job hazards and public safety risks and state the specific means and methods to reduce, control or eliminate those hazards. This part of the Site Safety Plan must also include how on-going evaluations of those risks and hazards will be carried out, including plans for periodic inspections to identify unsafe conditions, work practices and public safety hazards.
4. **Accident/Exposure Investigation:** Establish a procedure to investigate and report occupational and public injury or illness, property damage, vehicle accidents or other mishaps.
5. **Hazard Correction:** Establish means, methods and/or procedures for correcting unsafe or unhealthy conditions that might be exposing both the public and workers to hazards. Corrective actions must be taken immediately when observed or discovered. Should an imminent hazard exist which cannot be immediately abated without endangering employees, the public and/or property, remove or restrict all exposed persons from the area except those necessary to correct the existing condition. Employees necessary to correct the hazardous condition shall be provided the necessary safeguards. When corrective actions cannot be taken immediately, temporary measures should be taken until such time permanent measures are taken to eliminate the potential risks or hazards
6. **Training:** Describe site-specific hazard training programs. In addition to the required safety orientation, additional site specific training, in the form of required weekly safety meetings, will be required. Contractors must also initiate training when: a) new employees are hired; b) employees are given new job assignments for which training has not been previously received; c) new substances, processes, procedures or equipment are introduced that might represent a new public or worker hazard; d) the employee is made aware of a new or previously unrecognized hazard; e) new supervisors are assigned to familiarize themselves with the safety and health hazards to which employees under their immediate direction and control may be exposed; and f) after a jobsite incident or accident has occurred.
7. **Recordkeeping:** Establish procedures to maintain records of scheduled and periodic inspections, weekly safety meetings, and training records. Updated records shall be maintained at the jobsite, accessible to the Construction Safety Auditors and/or Quality Assurance Auditors/RE/CPM, and retained in accordance with DDC policy.

The most critical component of the Site Safety Plan is the Job Hazard Assessment section. This section must address specific hazards that are anticipated throughout the project. Each Site Safety Plan must address, at a minimum:

- Public and pedestrian safety
- Fall protection
- Electrical hazards
- Scaffolding
- Fire protection
- Emergency notification & response
- Housekeeping / debris removal
- Dust control
- Maintenance and protection of traffic
- Trenching and excavating
- Heavy equipment operations
- Material / equipment storage
- Environmental contamination
- Sheeting and shoring
- Alcohol and Drug Abuse Policy

The following additional hazards must be addressed, if applicable, based on the contract safety specifications and/or the results of the JHA (the list is not all-inclusive):

- Basic Personal Protective Equipment
- Compressed Air
- Compressed Gas Cylinders
- Cranes, Derricks and Hoists
- Demolition
- Electrical safety
- Excavations and Trenching
- Fall Protection – Floor openings/Stairways
- Fall Protection – Guardrails Toe boards etc
- Fall Protection – Leading Edge
- Fall Protection – Personal Fall Protection Devices
- Fire Protection and Fire Prevention
- Hazard Communication (RIGHT TO KNOW)
- Hazardous Energy & Lock Out / Tag Out
- Housekeeping/ Sanitation
- Maintenance and Protection of Traffic (MPT)
- Man Lifts /Aerial Lifts
- Marine Operations
- Motor Vehicle Safety
- Overhead Power lines
- Permit Required Confined Space
- Portable Ladders
- Powered Actuated Tools
- Powered Material Handling Equipment
- Scaffolds – Mobile
- Scaffolds – Stationary
- Scaffolds – Suspended
- Slings
- Steel Erection
- Welding and Cutting (Hot Work)
- Airborne Contaminants – Particulates – General
- Asbestos
- Blood borne Pathogens
- Hearing Protection
- Lead in Construction
- Mercury in Construction
- PCB's
- Respiratory Protection
- Silica
- Thermal Stress
- West Nile Virus
- Rodents and Vermin
- Noise Mitigation Plan

Certain DDC programs, such as Job Order Contracting System (JOCS), may not necessarily require Site Safety Plans. The JOCS contractor will be required to submit a Safety Program. In addition, certain DDC Operating Units may establish program or client-specific safety requirements. The contractor's Site Safety Plan must address such program or client specific safety requirements.

VII. KICK-OFF MEETINGS/PRE-CONSTRUCTION AND SAFETY REVIEW

As part of the construction kick-off meeting, a Site Safety Plan review will be part of the agenda. A QACS representative will participate in this meeting with the contractor prior to the start of the project for the purpose of:

- A. Reviewing the safety issues detailed in the contract.
- B. Reviewing the Site Safety Plan.
- C. Reviewing any new issues or information that was not previously addressed.
- D. Discussing planned inspections and audits of the site by DDC personnel.

VIII. EVALUATION DURING WORK IN PROGRESS

The Contractor's adherence to these Safety Requirements will be monitored throughout the project. This will be accomplished by the following:

- A. Use of a safety checklist by a representative of the Construction Safety Unit or other designated DDC representative or Consultant during regular, unannounced inspections of the job site. Field Exit Conferences will be held with the RE/CPM, Contractor Superintendents or Safety Representatives.
- B. The RE/CPM will continually monitor the safety and environmental performance of the contractor's employees and work methods. Deficiencies shall be brought to the attention of the contractor's representative on site for immediate correction. The DDC representative will maintain a written record of these deficiencies and forward them to the Construction Safety Unit on a weekly basis. Any critical deficiencies shall be immediately reported to QACS phone# (718) 391-1624 or (718) 391-1911.
- C. If the Contractor's safety performance during the project is not up to DDC standards (safety performance measure, accident/incident rate, etc.) the Director- QACS, or designee will meet with the Contractor's safety representative, the DDC project manager, the RE/CPM, or the DDC Environmental Specialist (if environmental issues are involved). The purpose of this meeting is to 1) determine the level of non-compliance; 2) explain and clarify the safety/environmental provisions; 3) agree on a future course of action to correct the deficiencies.
- D. If the deficiencies continue to occur with inadequate attention by the contractor, this shall, among other remedies available, be grounds for default.
- E. The contractor shall inform the Construction Safety Unit and ACCO Insurance and Risk Management Unit of all medical injuries or illnesses that require doctors' treatment resulting from an on-the-job incident within 24 hours of the occurrence. The Construction Safety Unit shall also be immediately informed of all fatalities, catastrophic accidents with more than one employee hospitalized, any injuries to members of the general public and major equipment damage (e.g., property damage, equipment rollovers, loads dropped from crane). QACS shall maintain a record of all contractor injuries and illnesses during the project and provide regular reports to the Agency.
- F. The Construction Safety Unit shall be immediately notified at the start of any NYS-DOL/ NYC-COSH/ OSHA/ EPA inspections. The Director of Quality Assurance & Construction Safety shall maintain a log of all contractor OSHA/EPA inspections and citations during the project.

IX. SAFETY PERFORMANCE EVALUATION

The contractor's safety record, including all DDC inspection results, will be considered as part of the Contractor's performance evaluation at the conclusion of the project. Poor safety performance during the course of the project shall be a reason to rate a Contractor unsatisfactory which will be reflected in the City's Vendex system and will be considered for future procurement actions as set forth in the City's Procurement Policy Board Rules.

THIS PAGE INTENTIONALLY LEFT BLANK

CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT

December 2013



**CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT**

TABLE OF CONTENTS

**CHAPTER I
THE CONTRACT AND DEFINITIONS**

ARTICLE 1.	THE CONTRACT	1
ARTICLE 2.	DEFINITIONS	1

**CHAPTER II
THE WORK AND ITS PERFORMANCE**

ARTICLE 3.	CHARACTER OF THE WORK	4
ARTICLE 4.	MEANS AND METHODS OF CONSTRUCTION	4
ARTICLE 5.	COMPLIANCE WITH LAWS	5
ARTICLE 6.	INSPECTION	10
ARTICLE 7.	PROTECTION OF WORK AND OF PERSONS AND PROPERTY; NOTICES AND INDEMNIFICATION	11

**CHAPTER III
TIME PROVISIONS**

ARTICLE 8.	COMMENCEMENT AND PROSECUTION OF THE WORK	12
ARTICLE 9.	PROGRESS SCHEDULES	12
ARTICLE 10.	REQUESTS FOR INFORMATION OR APPROVAL	13
ARTICLE 11.	NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY	13
ARTICLE 12.	COORDINATION WITH OTHER CONTRACTORS	17
ARTICLE 13.	EXTENSION OF TIME FOR PERFORMANCE	18
ARTICLE 14.	COMPLETION AND FINAL ACCEPTANCE OF THE WORK	21
ARTICLE 15.	LIQUIDATED DAMAGES	22
ARTICLE 16.	OCCUPATION OR USE PRIOR TO COMPLETION	22

**CHAPTER IV
SUBCONTRACTS AND ASSIGNMENTS**

ARTICLE 17.	SUBCONTRACTS	23
ARTICLE 18.	ASSIGNMENTS	25

**CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT**

TABLE OF CONTENTS

**CHAPTER V
CONTRACTOR'S SECURITY AND GUARANTY**

ARTICLE 19.	SECURITY DEPOSIT	26
ARTICLE 20.	PAYMENT GUARANTEE	26
ARTICLE 21.	RETAINED PERCENTAGE	29
ARTICLE 22.	INSURANCE	29
ARTICLE 23.	MONEY RETAINED AGAINST CLAIMS	35
ARTICLE 24.	MAINTENANCE AND GUARANTY	36

**CHAPTER VI
CHANGES, EXTRA WORK AND DOCUMENTATION OF CLAIM**

ARTICLE 25.	CHANGES	37
ARTICLE 26.	METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK	37
ARTICLE 27.	RESOLUTION OF DISPUTES	40
ARTICLE 28.	RECORD KEEPING FOR EXTRA OR DISPUTED WORK	44
ARTICLE 29.	OMITTED WORK	45
ARTICLE 30.	NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS	45

**CHAPTER VII
POWERS OF THE RESIDENT ENGINEER, THE ENGINEER
OR ARCHITECT AND THE COMMISSIONER**

ARTICLE 31.	THE RESIDENT ENGINEER	46
ARTICLE 32.	THE ENGINEER OR ARCHITECT OR PROJECT MANAGER	47
ARTICLE 33.	THE COMMISSIONER	47
ARTICLE 34.	NO ESTOPPEL	48

**CHAPTER VIII
LABOR PROVISIONS**

ARTICLE 35.	EMPLOYEES	48
ARTICLE 36.	NO DISCRIMINATION	50
ARTICLE 37.	LABOR LAW REQUIREMENTS	52
ARTICLE 38.	PAYROLL REPORTS	57
ARTICLE 39.	DUST HAZARDS	58

**CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT**

TABLE OF CONTENTS

CHAPTER IX

PARTIAL AND FINAL PAYMENTS

ARTICLE 40.	CONTRACT PRICE	58
ARTICLE 41.	BID BREAKDOWN ON LUMP SUM	58
ARTICLE 42.	PARTIAL PAYMENTS	58
ARTICLE 43.	PROMPT PAYMENT	59
ARTICLE 44.	SUBSTANTIAL COMPLETION PAYMENT	59
ARTICLE 45.	FINAL PAYMENT	60
ARTICLE 46.	ACCEPTANCE OF FINAL PAYMENT	61
ARTICLE 47.	APPROVAL BY PUBLIC DESIGN COMMISSION	62

CHAPTER X

CONTRACTOR'S DEFAULT

ARTICLE 48.	COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT	62
ARTICLE 49.	EXERCISE OF THE RIGHT TO DECLARE DEFAULT	64
ARTICLE 50.	QUITTING THE SITE	64
ARTICLE 51.	COMPLETION OF THE WORK	64
ARTICLE 52.	PARTIAL DEFAULT	64
ARTICLE 53.	PERFORMANCE OF UNCOMPLETED WORK	65
ARTICLE 54.	OTHER REMEDIES	65

CHAPTER XI

MISCELLANEOUS PROVISIONS

ARTICLE 55.	CONTRACTOR'S WARRANTIES	66
ARTICLE 56.	CLAIMS AND ACTIONS THEREON	66
ARTICLE 57.	INFRINGEMENT	66
ARTICLE 58.	NO CLAIM AGAINST OFFICERS, AGENTS OR EMPLOYEES	67
ARTICLE 59.	SERVICES OF NOTICES	67
ARTICLE 60.	UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT	67
ARTICLE 61.	ALL LEGAL PROVISIONS DEEMED INCLUDED	67
ARTICLE 62.	TAX EXEMPTION	67
ARTICLE 63.	INVESTIGATION(S) CLAUSE	69
ARTICLE 64.	TERMINATION BY THE CITY	71
ARTICLE 65.	CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE	73

**CITY OF NEW YORK
STANDARD CONSTRUCTION CONTRACT**

TABLE OF CONTENTS

CHAPTER XI (CONT'D)

MISCELLANEOUS PROVISIONS

ARTICLE 66.	PARTICIPATION IN AN INTERNATIONAL BOYCOTT	74
ARTICLE 67.	LOCALLY BASED ENTERPRISE PROGRAM	74
ARTICLE 68.	ANTITRUST	75
ARTICLE 69.	MACBRIDE PRINCIPLES PROVISIONS	75
ARTICLE 70.	ELECTRONIC FILING/NYC DEVELOPMENT HUB	77
ARTICLE 71.	PROHIBITION OF TROPICAL HARDWOODS	77
ARTICLE 72.	CONFLICTS OF INTEREST	78
ARTICLE 73.	MERGER CLAUSE	78
ARTICLE 74.	STATEMENT OF WORK	78
ARTICLE 75.	COMPENSATION TO BE PAID TO CONTRACTOR	78
ARTICLE 76.	ELECTRONIC FUNDS TRANSFER	78
ARTICLE 77.	RECORDS RETENTION	79
ARTICLE 78.	PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED ENTERPRISES IN CITY PROCUREMENT	79
SIGNATURES		85
ACKNOWLEDGMENT BY CORPORATION		86
ACKNOWLEDGMENT BY PARTNERSHIP		86
ACKNOWLEDGMENT BY INDIVIDUAL		86
ACKNOWLEDGMENT BY COMMISSIONER		87
AUTHORITY		88
COMPTROLLER'S CERTIFICATE		88
MAYOR'S CERTIFICATE		89
PERFORMANCE BOND #1		90
PERFORMANCE BOND #2		94
PAYMENT BOND		98

WITNESSETH:

The parties, in consideration of the mutual agreements contained herein, agree as follows:

**CHAPTER I
THE CONTRACT AND DEFINITIONS**

ARTICLE 1. THE CONTRACT

1.1 Except for titles, subtitles, headings, running headlines, tables of contents and indices (all of which are printed herein merely for convenience), the following, except for such portions thereof as may be specifically excluded, shall be deemed to be part of this Contract:

1.1.1 All provisions required by law to be inserted in this Contract, whether actually inserted or not;

1.1.2 The Contract Drawings and Specifications;

1.1.3 The General Conditions and Special Conditions, if any;

1.1.4 The Contract;

1.1.5 The Information for Bidders; Request for Proposals; Notice of Solicitation and Proposal For Bids; Bid or Proposal, and, if used, the Bid Booklet;

1.1.6 All Addenda issued prior to the receipt of the bids; the Notice of Award; Performance and Payment Bonds, if required; and the Notice to Proceed or the Order to Work.

1.2 Should any conflict occur in or between the Drawings and Specifications, the Contractor shall be deemed to have estimated the most expensive way of doing the Work, unless the Contractor shall have asked for and obtained a decision in writing from the Commissioner of the Agency that is entering into this Contract, before the submission of its bid, as to what shall govern.

ARTICLE 2. DEFINITIONS

2.1 The following words and expressions, or pronouns used in their stead, shall, wherever they appear in this Contract, be construed as follows, unless a different meaning is clear from the context:

2.1.1 "**Addendum**" or "**Addenda**" shall mean the additional Contract provisions and/or technical clarifications issued in writing by the Commissioner prior to the receipt of bids.

2.1.2 "**Agency**" shall mean a city, county, borough or other office, position, department, division, bureau, board or commission, or a corporation, institution or agency of government, the expenses of which are paid in whole or in part from the City treasury.

2.1.3 "**Agency Chief Contracting Officer**" (**ACCO**) shall mean a person delegated authority by the Commissioner to organize and supervise the procurement activity of subordinate Agency staff in conjunction with the CCPO, or his/her duly authorized representative.

2.1.4 "**Allowance**" shall mean a sum of money which the Agency may include in the total amount of the Contract for such specific contingencies as the Agency believes may be necessary to complete the Work, *e.g.*, lead or asbestos remediation, and for which the Contractor will be paid on the basis of stipulated unit prices or a formula set forth in the Contract or negotiated between the parties provided, however, that if the Contractor is not directed to use the Allowance, the Contractor shall have no right to such money and it shall be deducted from the total amount of the Contract.

2.1.5 "**City**" shall mean the City of New York.

2.1.6 "**City Chief Procurement Officer**" (CCPO) shall mean a person delegated authority by the Mayor to coordinate and oversee the procurement activity of Mayoral agency staff, including the ACCO and any offices which have oversight responsibility for the procurement of construction, or his/her duly authorized representative.

2.1.7 "**Commissioner**" shall mean the head of the Agency that has entered into this Contract, or his/her duly authorized representative.

2.1.8 "**Comptroller**" shall mean the Comptroller of the City of New York.

2.1.9 "**Contract**" or "**Contract Documents**" shall mean each of the various parts of the contract referred to in Article 1 hereof, both as a whole and severally.

2.1.10 "**Contract Drawings**" shall mean only those drawings specifically entitled as such and listed in the Specifications or in any Addendum, or any drawings furnished by the Commissioner, pertaining or supplemental thereto.

2.1.11 "**Contract Work**" shall mean everything required to be furnished and done by the Contractor by any one or more of the parts of the Contract referred to in Article 1, except Extra Work as hereinafter defined.

2.1.12 "**Contractor**" shall mean the entity which executed this Contract, whether a corporation, firm, partnership, joint venture, individual, or any combination thereof, and its, their, his/her successors, personal representatives, executors, administrators, and assigns, and any person, firm, partnership, joint venture, individual, or corporation which shall at any time be substituted in the place of the Contractor under this Contract.

2.1.13 "**Days**" shall mean calendar days, except where otherwise specified.

2.1.14 "**Engineer**" or "**Architect**" or "**Project Manager**" shall mean the person so designated in writing by the Commissioner in the Notice to Proceed or the Order to Work to act as such in relation to this Contract, including a private Architect or Engineer or Project Manager, as the case may be. Subject to written approval by the Commissioner, the Engineer, Architect or Project Manager may designate an authorized representative.

2.1.15 "**Engineering Audit Officer**" (EAO) shall mean the person so designated by the Commissioner to perform responsible auditing functions hereunder.

2.1.16 "**Extra Work**" shall mean Work other than that required by the Contract at the time of award which is authorized by the Commissioner pursuant to Chapter VI of this Contract.

2.1.17 "**Federal-Aid Contract**" shall mean a contract in which the United States (federal) Government provides financial funding as so designated in the Information for Bidders.

2.1.18 "**Final Acceptance**" shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

2.1.19 "**Final Approved Punch List**" shall mean a list, approved pursuant to Article 14.2.2, specifying those items of Work to be completed by the Contractor after Substantial Completion and dates for the completion of each item of Work.

2.1.20 "**Law**" or "**Laws**" shall mean the Constitution of the State of New York, the New York City Charter, the New York City Administrative Code, a statute of the United States or of the State of New York, a local law of the City of New York, any ordinance, rule or regulation having the force of law, or common law.

2.1.21 "**Materialman**" shall mean any corporation, firm, partnership, joint venture, or individual, other than employees of the Contractor, who or which contracts with the Contractor or any Subcontractor, to fabricate or deliver, or who actually fabricates or delivers, plant, materials or equipment to be incorporated in the Work.

2.1.22 "**Means and Methods of Construction**" shall mean the labor, materials, temporary structures, tools, plant, and construction equipment, and the manner and time of their use, necessary to accomplish the result intended by this Contract.

2.1.23 "**Notice to Proceed**" or "**Order to Work**" shall mean the written notice issued by the Commissioner specifying the time for commencement of the Work and the Engineer, Architect or Project Manager.

2.1.24 "**Other Contractor(s)**" shall mean any contractor (other than the entity which executed this Contract or its Subcontractors) who or which has a contract with the City for work on or adjacent to the building or Site of the Work.

2.1.25 "**Payroll Taxes**" shall mean State Unemployment Insurance (SUI), Federal Unemployment Insurance (FUI), and payments pursuant to the Federal Insurance Contributions Act (FICA).

2.1.26 "**Project**" shall mean the public improvement to which this Contract relates.

2.1.27 "**Procurement Policy Board**" (PPB) shall mean the Agency of the City of New York whose function is to establish comprehensive and consistent procurement policies and rules which shall have broad application throughout the City.

2.1.28 "**Required Quantity**" in a unit price Contract shall mean the actual quantity of any item of Work or materials which is required to be performed or furnished in order to comply with the Contract.

2.1.29 "**Resident Engineer**" shall mean the representative of the Commissioner duly designated by the Commissioner to be his/her representative at the site of the Work.

2.1.30 "**Site**" shall mean the area upon or in which the Contractor's operations are carried on, and such other areas adjacent thereto as may be designated as such by the Engineer.

2.1.31 "**Small Tools**" shall mean items that are ordinarily required for a worker's job function, including but not limited to, equipment that ordinarily has no licensing, insurance

or substantive storage costs associated with it; such as circular and chain saws, impact drills, threaders, benders, wrenches, socket tools, etc.

2.1.32 "**Specifications**" shall mean all of the directions, requirements, and standards of performance applying to the Work as hereinafter detailed and designated under the Specifications.

2.1.33 "**Subcontractor**" shall mean any person, firm or corporation, other than employees of the Contractor, who or which contracts with the Contractor or with its subcontractors to furnish, or actually furnishes labor, or labor and materials, or labor and equipment, or superintendence, supervision and/or management at the Site. Wherever the word Subcontractor appears, it shall also mean sub-Subcontractor.

2.1.34 "**Substantial Completion**" shall mean the written determination by the Engineer that the Work required under this Contract is substantially, but not entirely, complete and the approval of the **Final Approved Punch List**.

2.1.35 "**Work**" shall mean all services required to complete the Project in accordance with the Contract Documents, including without limitation, labor, material, superintendence, management, administration, equipment, and incidentals, and obtaining any and all permits, certifications and licenses as may be necessary and required to complete the Work, and shall include both Contract Work and Extra Work.

CHAPTER II THE WORK AND ITS PERFORMANCE

ARTICLE 3. CHARACTER OF THE WORK

3.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Work** shall be performed in accordance with the best modern practice, utilizing, unless otherwise specified in writing, new and unused materials of standard first grade quality and workmanship and design of the highest quality, to the satisfaction of the **Commissioner**.

ARTICLE 4. MEANS AND METHODS OF CONSTRUCTION

4.1 Unless otherwise expressly provided in the **Contract Drawings, Specifications, and Addenda**, the **Means and Methods of Construction** shall be such as the **Contractor** may choose; subject, however, to the **Engineer's** right to reject the **Means and Methods of Construction** proposed by the **Contractor** which in the opinion of the **Engineer**:

4.1.1 Will constitute or create a hazard to the **Work**, or to persons or property; or

4.1.2 Will not produce finished **Work** in accordance with the terms of the **Contract**; or

4.1.3 Will be detrimental to the overall progress of the **Project**.

4.2 The **Engineer's** approval of the **Contractor's Means and Methods of Construction**, or his/her failure to exercise his/her right to reject such means or methods, shall not relieve the **Contractor** of its obligation to complete the **Work** as provided in this **Contract**; nor shall the exercise of such right to reject create a cause of action for damages.

ARTICLE 5. COMPLIANCE WITH LAWS

5.1 The **Contractor** shall comply with all **Laws** applicable to this **Contract** and to the **Work** to be done hereunder.

5.2 Procurement Policy Board Rules: This **Contract** is subject to the Rules of the **PPB** ("**PPB Rules**") in effect at the time of the bid opening for this **Contract**. In the event of a conflict between the **PPB Rules** and a provision of this **Contract**, the **PPB Rules** shall take precedence.

5.3 Noise Control Code provisions.

5.3.1 In accordance with the provisions of Section 24-216(b) of the Administrative Code of the **City** ("**Administrative Code**"), Noise Abatement Contract Compliance, devices and activities which will be operated, conducted, constructed or manufactured pursuant to this **Contract** and which are subject to the provisions of the **City Noise Control Code** shall be operated, conducted, constructed, or manufactured without causing a violation of the Administrative Code. Such devices and activities shall incorporate advances in the art of noise control development for the kind and level of noise emitted or produced by such devices and activities, in accordance with regulations issued by the **Commissioner** of the **City Department of Environmental Protection**.

5.3.2 The **Contractor** agrees to comply with Section 24-219 of the Administrative Code and implementing rules codified at 15 Rules of the City of New York ("**RCNY**") Section 28-100 *et seq.* In accordance with such provisions, the **Contractor**, if the **Contractor** is the responsible party under such regulations, shall prepare and post a Construction Noise Mitigation Plan at each **Site**, in which the **Contractor** shall certify that all construction tools and equipment have been maintained so that they operate at normal manufacturers operating specifications. If the **Contractor** cannot make this certification, it must have in place an Alternative Noise Mitigation Plan approved by the **City Department of Environmental Protection**. In addition, the **Contractor's** certified Construction Noise Mitigation Plan is subject inspection by the **City Department of Environmental Protection** in accordance with Section 28-101 of Title 15 of RCNY. No **Contract Work** may take place at a **Site** unless there is a Construction Noise Mitigation Plan or approved Alternative Noise Mitigation Plan in place. In addition, the **Contractor** shall create and implement a noise mitigation training program. Failure to comply with these requirements may result in fines and other penalties pursuant to the applicable provisions of the Administrative Code and RCNY.

5.4 Ultra Low Sulfur Diesel Fuel: In accordance with the provisions of Section 24-163.3 of the Administrative Code, the **Contractor** specifically agrees as follows:

5.4.1 Definitions. For purposes of this Article 5.4, the following definitions apply:

5.4.1(a) "**Contractor**" means any person or entity that enters into a Public Works Contract with a **City Agency**, or any person or entity that enters into an agreement with such person or entity, to perform work or provide labor or services related to such Public Works Contract.

5.4.1(b) "**Motor Vehicle**" means any self-propelled vehicle designed for transporting persons or property on a street or highway.

5.4.1(c) "**Nonroad Engine**" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of

Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.4.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except that this term shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) horsepower or less and that are not used in any construction program or project.

5.4.1(e) "Public Works Contract" means a contract with a **City Agency** for a construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; a contract with a **City Agency** for the preparation for any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge; or a contract with a **City Agency** for any final work involved in the completion of any construction program or project involving the construction, demolition, restoration, rehabilitation, repair, renovation, or abatement of any building, structure, tunnel, excavation, roadway, park or bridge.

5.4.1(f) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.4.2 Ultra Low Sulfur Diesel Fuel

5.4.2(a) All **Contractors** shall use Ultra Low Sulfur Diesel Fuel in diesel-powered Nonroad Vehicles in the performance of this **Contract**.

5.4.2(b) Notwithstanding the requirements of Article 5.4.2(a), **Contractors** may use diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) to fulfill the requirements of this Article 5.4.2, where the Commissioner of the **City** Department of Environmental Protection ("DEP Commissioner") has issued a determination that a sufficient quantity of Ultra Low Sulfur Diesel Fuel is not available to meet the needs of **Agencies** and **Contractors**. Any such determination shall expire after six (6) months unless renewed.

5.4.2(c) **Contractors** shall not be required to comply with this Article 5.4.2 where the **City Agency** letting this **Contract** makes a written finding, which is approved, in writing, by the DEP Commissioner, that a sufficient quantity of Ultra Low Sulfur Diesel Fuel, or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is not available to meet the requirements of Section 24-163.3 of the Administrative Code, provided that such **Contractor** in its fulfillment of the requirements of this **Contract**, to the extent practicable, shall use whatever quantity of Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm) is available. Any finding made pursuant to this Article 5.4.2(c) shall expire after sixty (60) **Days**, at which time the requirements of this Article 5.4.2 shall be in full force and effect unless the **City Agency** renews the finding in writing and such renewal is approved by the DEP Commissioner.

5.4.2(d) **Contractors** may check on determinations and approvals issued by the DEP Commissioner pursuant to Section 24-163.3 of the Administrative Code, if any, at www.dep.nyc.gov or by contacting the **City Agency** letting this **Contract**.

5.4.2(e) The requirements of this Article 5.4.2 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.3 Best Available Technology

5.4.3(a) All **Contractors** shall utilize the best available technology for reducing the emission of pollutants for diesel-powered Nonroad Vehicles in the performance of this **Contract**. For determinations of best available technology for each type of diesel-powered Nonroad Vehicle, **Contractors** shall comply with the regulations of the **City Department of Environmental Protection**, as and when adopted, Chapter 14 of Title 15 of the Rules of the City of New York (RCNY). The **Contractor** shall fully document all steps in the best available technology selection process and shall furnish such documentation to the **City Agency** or the DEP Commissioner upon request. The **Contractor** shall retain all documentation generated in the best available technology selection process for as long as the selected best available technology is in use.

5.4.3(b) No **Contractor** shall be required to replace best available technology for reducing the emission of pollutants or other authorized technology utilized for a diesel-powered Nonroad Vehicle in accordance with the provisions of this Article 5.4.3 within three (3) years of having first utilized such technology for such vehicle.

5.4.3(c) This Article 5.4.3 shall not apply to any vehicle used to satisfy the requirements of a specific Public Works Contract for fewer than twenty (20) **Days**.

5.4.3(d) The **Contractor** shall not be required to comply with this Article 5.4.3 with respect to a diesel-powered Nonroad Vehicle under the following circumstances:

5.4.3(d)(i) Where the **City Agency** makes a written finding, which is approved, in writing, by the DEP Commissioner, that the best available technology for reducing the emission of pollutants as required by this Article 5.4.3 is unavailable for such vehicle, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle.

5.4.3(d)(ii) Where the DEP Commissioner has issued a written waiver based upon the **Contractor** having demonstrated to the DEP Commissioner that the use of the best available technology for reducing the emission of pollutants might endanger the operator of such vehicle or those working near such vehicle, due to engine malfunction, the **Contractor** shall use whatever technology for reducing the emission of pollutants, if any, is available and appropriate for such vehicle, which would not endanger the operator of such vehicle or those working near such vehicle.

5.4.3(d)(iii) In determining which technology to use for the purposes of Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above, the **Contractor** shall primarily consider the reduction in emissions of particulate matter and secondarily consider the reduction in emissions of nitrogen oxides associated with the use of such

technology, which shall in no event result in an increase in the emissions of either such pollutant.

5.4.3(d)(iv) The **Contractor** shall submit requests for a finding or a waiver pursuant to this Article 5.4.3(d) in writing to the DEP Commissioner, with a copy to the **ACCO** of the **City Agency** letting this **Contract**. Any finding or waiver made or issued pursuant to Articles 5.4.3(d)(i) and 5.4.3(d)(ii) above shall expire after one hundred eighty (180) **Days**, at which time the requirements of Article 5.4.3(a) shall be in full force and effect unless the **City Agency** renews the finding, in writing, and the DEP Commissioner approves such finding, in writing, or the DEP Commissioner renews the waiver, in writing.

5.4.3(e) The requirements of this Article 5.4.3 do not apply where they are precluded by federal or State funding requirements or where the **Contract** is an emergency procurement.

5.4.4 Section 24-163 of the Administrative Code. The **Contractor** shall comply with Section 24-163 of the Administrative Code related to the idling of the engines of motor vehicles while parking.

5.4.5 Compliance

5.4.5(a) The **Contractor's** compliance with Article 5.4 may be independently monitored. If it is determined that the **Contractor** has failed to comply with any provision of Article 5.4, any costs associated with any independent monitoring incurred by the **City** shall be reimbursed by the **Contractor**.

5.4.5(b) Any **Contractor** who violates any provision of Article 5.4, except as provided in Article 5.4.5(c) below, shall be liable for a civil penalty between the amounts of one thousand (\$1,000) and ten thousand (\$10,000) dollars, in addition to twice the amount of money saved by such **Contractor** for failure to comply with Article 5.4.

5.4.5(c) No **Contractor** shall make a false claim with respect to the provisions of Article 5.4 to a **City Agency**. Where a **Contractor** has been found to have done so, such **Contractor** shall be liable for a civil penalty of twenty thousand (\$20,000) dollars, in addition to twice the amount of money saved by such **Contractor** in association with having made such false claim.

5.4.6 Reporting

5.4.6(a) For all Public Works Contracts covered by this Article 5.4, the **Contractor** shall report to the **City Agency** the following information:

5.4.6(a)(i) The total number of diesel-powered Nonroad Vehicles used to fulfill the requirements of this Public Works Contract;

5.4.6(a)(ii) The number of such Nonroad Vehicles that were powered by Ultra Low Sulfur Diesel Fuel;

5.4.6(a)(iii) The number of such Nonroad Vehicles that utilized the best available technology for reducing the emission of pollutants, including a breakdown by vehicle model and the type of technology;

5.4.6(a)(iv) The number of such Nonroad Vehicles that utilized such other authorized technology in accordance with Article 5.4.3, including a breakdown by vehicle model and the type of technology used for each such vehicle;

5.4.6(a)(v) The locations where such Nonroad Vehicles were used; and

5.4.6(a)(vi) Where a determination is in effect pursuant to Article 5.4.2(b) or 5.4.2(c), detailed information concerning the **Contractor's** efforts to obtain Ultra Low Sulfur Diesel Fuel or diesel fuel that has a sulfur content of no more than thirty parts per million (30 ppm).

5.4.6(b) The **Contractor** shall submit the information required by Article 5.4.6(a) at the completion of **Work** under the Public Works Contract and on a yearly basis no later than August 1 throughout the term of the Public Works Contract. The yearly report shall cover **Work** performed during the preceding fiscal year (July 1 - June 30).

5.5 Ultra Low Sulfur Diesel Fuel. In accordance with the Coordinated Construction Act for Lower Manhattan, as amended:

5.5.1 Definitions. For purposes of this Article 5.5, the following definitions apply:

5.5.1(a) "Lower Manhattan" means the area to the south of and within the following lines: a line beginning at a point where the United States pierhead line in the Hudson River as it exists now or may be extended would intersect with the southerly line of West Houston Street in the Borough of Manhattan extended, thence easterly along the southerly side of West Houston Street to the southerly side of Houston Street, thence easterly along the southerly side of Houston Street to the southerly side of East Houston Street, thence northeasterly along the southerly side of East Houston Street to the point where it would intersect with the United States pierhead line in the East River as it exists now or may be extended, including tax lots within or immediately adjacent thereto.

5.5.1(b) "Lower Manhattan Redevelopment Project" means any project in Lower Manhattan that is funded in whole or in part with federal or State funding, or any project intended to improve transportation between Lower Manhattan and the two air terminals in the City known as LaGuardia Airport and John F. Kennedy International Airport, or between Lower Manhattan and the air terminal in Newark known as Newark Liberty International Airport, and that is funded in whole or in part with federal funding.

5.5.1(c) "Nonroad Engine" means an internal combustion engine (including the fuel system) that is not used in a Motor Vehicle or a vehicle used solely for competition, or that is not subject to standards promulgated under Section 7411 or Section 7521 of Title 42 of the United States Code, except that this term shall apply to internal combustion engines used to power generators, compressors or similar equipment used in any construction program or project.

5.5.1(d) "Nonroad Vehicle" means a vehicle that is powered by a Nonroad Engine, fifty (50) horsepower (HP) and greater, and that is not a Motor Vehicle or a vehicle used solely for competition, which shall include, but not be limited to, excavators, backhoes, cranes, compressors, generators, bulldozers, and similar equipment, except

that this terms shall not apply to horticultural maintenance vehicles used for landscaping purposes that are powered by a Nonroad Engine of sixty-five (65) HP or less and that are not used in any construction program or project.

5.5.1(e) "Ultra Low Sulfur Diesel Fuel" means diesel fuel that has a sulfur content of no more than fifteen parts per million (15 ppm).

5.5.2 Requirements. **Contractors** and **Subcontractors** are required to use only Ultra Low Sulfur Diesel Fuel to power the diesel-powered Nonroad Vehicles with engine HP rating of fifty (50) HP and above used on a Lower Manhattan Redevelopment Project and, where practicable, to reduce the emission of pollutants by retrofitting such Nonroad Vehicles with oxidation catalysts, particulate filters, or technology that achieves lowest particulate matter emissions.

5.6 Pesticides. In accordance with Section 17-1209 of the Administrative Code, to the extent that the **Contractor** or any **Subcontractor** applies pesticides to any property owned or leased by the **City**, the **Contractor**, and any **Subcontractor** shall comply with Chapter 12 of the Administrative Code.

5.7 Waste Treatment, Storage, and Disposal Facilities and Transporters. In connection with the **Work**, the **Contractor** and any **Subcontractor** shall use only those waste treatment, storage, and disposal facilities and waste transporters that possess the requisite license, permit or other governmental approval necessary to treat, store, dispose, or transport the waste, materials or hazardous substances.

5.8 Environmentally Preferable Purchasing. The **Contractor** shall ensure that products purchased or leased by the **Contractor** or any **Subcontractor** for the **Work** that are not specified by the **City** or are submitted as equivalents to a product specified by the **City** comply with the requirements of the New York City Environmentally Preferable Purchasing Program contained in Chapter 11 of Title 43 of the RCNY, pursuant to Chapter 3 of Title 6 of the Administrative Code.

ARTICLE 6. INSPECTION

6.1 During the progress of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall at all times afford the representatives of the **City** every reasonable, safe, and proper facility for inspecting all **Work** done or being done at the **Site** and also for inspecting the manufacture or preparation of materials and equipment at the place of such manufacture or preparation.

6.2 The **Contractor's** obligation hereunder shall include the uncovering or taking down of finished **Work** and its restoration thereafter; provided, however, that the order to uncover, take down and restore shall be in writing, and further provided that if **Work** thus exposed proves satisfactory, and if the **Contractor** has complied with Article 6.1, such uncovering or taking down and restoration shall be considered an item of **Extra Work** to be paid for in accordance with the provisions of Article 26. If the **Work** thus exposed proves unsatisfactory, the **City** has no obligation to compensate the **Contractor** for the uncovering, taking down or restoration.

6.3 Inspection and approval by the **Commissioner**, the **Engineer**, **Project Manager**, or **Resident Engineer**, of finished **Work** or of **Work** being performed, or of materials and equipment at the place of manufacture or preparation, shall not relieve the **Contractor** of its obligation to perform the **Work** in strict accordance with the **Contract**. Finished or unfinished **Work** not found to be in strict accordance with the **Contract** shall be replaced as directed by the **Engineer**, even though such **Work** may have been previously approved and paid for. Such corrective **Work** is **Contract Work** and shall not be deemed **Extra Work**.

6.4 Rejected **Work** and materials shall be promptly taken down and removed from the **Site**, which must at all times be kept in a reasonably clean and neat condition.

**ARTICLE 7. PROTECTION OF WORK AND OF PERSONS
AND PROPERTY; NOTICES AND INDEMNIFICATION**

7.1 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall be under an absolute obligation to protect the finished and unfinished **Work** against any damage, loss, injury, theft and/or vandalism and in the event of such damage, loss, injury, theft and/or vandalism, it shall promptly replace and/or repair such **Work** at the **Contractor's** sole cost and expense, as directed by the **Resident Engineer**. The obligation to deliver finished **Work** in strict accordance with the **Contract** prior to **Final Acceptance** shall be absolute and shall not be affected by the **Resident Engineer's** approval of, or failure to prohibit, the **Means and Methods of Construction** used by the **Contractor**.

7.2 During the performance of the **Work** and up to the date of **Final Acceptance**, the **Contractor** shall take all reasonable precautions to protect all persons and the property of the **City** and of others from damage, loss or injury resulting from the **Contractor's**, and/or its **Subcontractors'** operations under this **Contract**. The **Contractor's** obligation to protect shall include the duty to provide, place or replace, and adequately maintain at or about the **Site** suitable and sufficient protection such as lights, barricades, and enclosures.

7.3 The **Contractor** shall comply with the notification requirements set forth below in the event of any loss, damage or injury to **Work**, persons or property, or any accidents arising out of the operations of the **Contractor** and/or its **Subcontractors** under this **Contract**.

7.3.1 The **Contractor** shall make a full and complete report in writing to the **Resident Engineer** within three (3) **Days** after the occurrence.

7.3.2 The **Contractor** shall also send written notice of any such event to all insurance carriers that issued potentially responsive policies (including commercial general liability insurance carriers for events relating to the **Contractor's** own employees) no later than twenty (20) days after such event and again no later than twenty (20) days after the initiation of any claim and/or action resulting therefrom. Such notice shall contain the following information: the number of the insurance policy, the name of the Named Insured, the date and location of the incident, and the identity of the persons injured or property damaged. For any policy on which the **City** and/or the **Engineer, Architect, or Project Manager** are Additional Insureds, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Additional Insured, such other Additional Insureds, as well as the Named Insured."

7.3.2(a) Whenever such notice is sent under a policy on which the **City** is an Additional Insured, the **Contractor** shall provide copies of the notice to the **Comptroller**, the **Commissioner** and the **City Corporation Counsel**. The copy to the **Comptroller** shall be sent to the Insurance Unit, NYC Comptroller's Office, 1 Centre Street – Room 1222, New York, New York, 10007. The copy to the **Commissioner** shall be sent to the address set forth in Schedule A of the General Conditions. The copy to the **City Corporation Counsel** shall be sent to Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

7.3.2(b) If the **Contractor** fails to provide any of the foregoing notices to any appropriate insurance carrier(s) in a timely and complete manner, the **Contractor** shall indemnify the **City** for all losses, judgments, settlements, and expenses, including reasonable attorneys' fees, arising from an insurer's disclaimer of coverage citing late notice by or on behalf of the **City**.

7.4 To the fullest extent permitted by law, the **Contractor** shall defend, indemnify, and hold the **City**, its employees, and officials (the "Indemnitees") harmless against any and all claims (including but not limited to claims asserted by any employee of the **Contractor** and/or its **Subcontractors**) and costs and expenses of whatever kind (including but not limited to payment or reimbursement of attorneys' fees and disbursements) allegedly arising out of or in any way related to the operations of the **Contractor** and/or its **Subcontractors** in the performance of this **Contract** or from the **Contractor's** and/or its **Subcontractors'** failure to comply with any of the provisions of this **Contract** or of the **Law**. Such costs and expenses shall include all those incurred in defending the underlying claim and those incurred in connection with the enforcement of this Article 7.4 by way of cross-claim, third-party claim, declaratory action or otherwise. The parties expressly agree that the indemnification obligation hereunder contemplates (1) full indemnity in the event of liability imposed against the Indemnitees without negligence and solely by reason of statute, operation of **Law** or otherwise; and (2) partial indemnity in the event of any actual negligence on the part of the Indemnitees either causing or contributing to the underlying claim (in which case, indemnification will be limited to any liability imposed over and above that percentage attributable to actual fault whether by statute, by operation of **Law**, or otherwise). Where partial indemnity is provided hereunder, all costs and expenses shall be indemnified on a pro rata basis.

7.4.1 Indemnification under Article 7.4 or any other provision of the **Contract** shall operate whether or not **Contractor** or its **Subcontractors** have placed and maintained the insurance specified under Article 22.

7.5 The provisions of this Article 7 shall not be deemed to create any new right of action in favor of third parties against the **Contractor** or the **City**.

CHAPTER III TIME PROVISIONS

ARTICLE 8. COMMENCEMENT AND PROSECUTION OF THE WORK

8.1 The **Contractor** shall commence the **Work** on the date specified in the **Notice to Proceed** or the **Order to Work**. The time for performance of the **Work** under the **Contract** shall be computed from the date specified in the **Notice to Proceed** or the **Order to Work**. **TIME BEING OF THE ESSENCE** to the **City**, the **Contractor** shall thereafter prosecute the **Work** diligently, using such **Means and Methods of Construction** as are in accord with Article 4 herein and as will assure its completion not later than the date specified in this **Contract**, or on the date to which the time for completion may be extended.

ARTICLE 9. PROGRESS SCHEDULES

9.1 To enable the **Work** to be performed in an orderly and expeditious manner, the **Contractor**, within fifteen (15) **Days** after the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Engineer**, shall submit to the **Engineer** a proposed progress schedule based on the Critical Path Method in the form of a bar graph or in such other form as specified by the **Engineer**, and monthly cash flow requirements, showing:

9.1.1 The anticipated time of commencement and completion of each of the various operations to be performed under this **Contract**; and

9.1.2 The sequence and interrelation of each of these operations with the others and with those of other related contracts; and

9.1.3 The estimated time required for fabrication or delivery, or both, of all materials and equipment required for the **Work**, including the anticipated time for obtaining required approvals pursuant to Article 10; and

9.1.4 The estimated amount in dollars the **Contractor** will claim on a monthly basis.

9.2 The proposed schedule shall be revised as directed by the **Engineer**, until finally approved by the **Engineer**, and after such approval, subject to the provisions of Article 11, shall be strictly adhered to by the **Contractor**.

9.3 If the **Contractor** shall fail to adhere to the approved progress schedule, or to the schedule as revised pursuant to Article 11, it shall promptly adopt such other or additional **Means and Methods of Construction**, at its sole cost and expense, as will make up for the time lost and will assure completion in accordance with the approved progress schedule. The approval by the **City** of a progress schedule which is shorter than the time allotted under the **Contract** shall not create any liability for the **City** if the approved progress schedule is not met.

9.4 The **Contractor** will not receive any payments until the proposed progress schedule is submitted.

ARTICLE 10. REQUESTS FOR INFORMATION OR APPROVAL

10.1 From time to time as the **Work** progresses and in the sequence indicated by the approved progress schedule, the **Contractor** shall submit to the **Engineer** a specific request in writing for each item of information or approval required by the **Contractor**. These requests shall state the latest date upon which the information or approval is actually required by the **Contractor**, and shall be submitted in a reasonable time in advance thereof to provide the **Engineer** a sufficient time to act upon such submissions, or any necessary re-submissions thereof.

10.2 The **Contractor** shall not have any right to an extension of time on account of delays due to the **Contractor's** failure to submit requests for the required information or the required approval in accordance with the above requirements.

ARTICLE 11. NOTICE OF CONDITIONS CAUSING DELAY AND DOCUMENTATION OF DAMAGES CAUSED BY DELAY

11.1 After the commencement of any condition which is causing or may cause a delay in completion of the **Work**, including conditions for which the **Contractor** may be entitled to an extension of time, the following notifications and submittals are required:

11.1.1 Within seven (7) **Days** after the commencement of such condition, the **Contractor** must notify the **Engineer** in writing of the existence, nature and effect of such condition upon the approved progress schedule and the **Work**, and must state why and in what respects, if any, the condition is causing or may cause a delay.

11.1.2 If the **Contractor** shall claim to be sustaining damages for delay as provided for in this Article 11, within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter for as long as such damages are being incurred, the **Contractor** shall submit to the **Commissioner** verified written statements of the details and the amounts of such damages, together with documentary evidence of such damages, ("statement of delay damages") as further detailed in Article 11.6. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. On failure of the **Contractor** to strictly comply with all of the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action arising under or by reason of this **Contract** shall not be different from or in excess of the statements made and documentation provided pursuant to this Article 11.

11.1.3 Within 60 days of submission of the final verified statement of claims pursuant to Article 44, the **Commissioner** shall make a determination as to whether a compensable delay has occurred and, if so, the amount of compensation due the **Contractor**. Notwithstanding the above, the **Commissioner** may make a determination as to whether a compensable delay has occurred at any time after the **Contractor's** first submission of a statement of delay damages provided, however, that the amount of compensation due to the **Contractor** will not be determined until the **Commissioner** determines that the **Work** is delayed after the date set for substantial completion.

11.2 Failure of the **Contractor** to strictly comply with the requirements of Article 11.1.1 may, in the discretion of the **Commissioner**, be deemed sufficient cause to deny any extension of time on account of delay arising out of such condition. Failure of the **Contractor** to strictly comply with the requirements of Articles 11.1.1 and 11.1.2 shall be deemed a conclusive waiver by the **Contractor** of any and all claims for damages for delay arising from such condition and no right to recover on such claims shall exist.

11.3 When appropriate and directed by the **Engineer**, the progress schedule shall be revised by the **Contractor** until finally approved by the **Engineer**. The revised progress schedule must be strictly adhered to by the **Contractor**.

11.4 Compensable Delays

11.4.1 The **Contractor** agrees to make claim only for additional costs attributable to delay in the performance of this **Contract** necessarily extending the time for completion of the **Work** or resulting from acceleration directed by the **Commissioner** and required to maintain the **Project** schedule, occasioned solely by any act or omission to act of the **City** listed below. The **Contractor** also agrees that delay from any other cause shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**.

11.4.1.1 The failure of the **City** to take reasonable measures to coordinate and progress the **Work**, except that the **City** shall not be responsible for the **Contractor's** obligation to coordinate and progress the **Work** of its **Subcontractors**.

11.4.1.2 Extended delays attributable to the **City** in the review or issuance of change orders, in shop drawing reviews and approvals or as a result of the cumulative impact of multiple change orders, which have a verifiable impact on **Project** costs.

11.4.1.3 The unavailability of the **Site** for an extended period of time that significantly affects the scheduled completion of the **Contract**.

- 11.4.1.4 The issuance by the **Engineer** of a stop work order relative to a substantial portion of the **Work** for a period exceeding thirty (30) **Days**, that was not brought about through any action or omission of the **Contractor**.
- 11.4.1.5 Differing site conditions that were neither known nor reasonably ascertainable on a pre-bid inspection of the **Site** or review of the bid documents or other publicly available sources, and that are not ordinarily encountered in the **Project's** geographical area or neighborhood or in the type of **Work** to be performed.
- 11.4.1.6 Delays caused by the **City's** bad faith or its willful, malicious, or grossly negligent conduct;
- 11.4.1.7 Delays not contemplated by the parties;
- 11.4.1.8 Delays so unreasonable that they constitute an intentional abandonment of the **Contract** by the **City**; and
- 11.4.1.9 Delays resulting from the **City's** breach of a fundamental obligation of the **Contract**.

11.4.2 No claim may be made for any alleged delay in **Substantial Completion** of the **Work** by a date earlier than the date of **Substantial Completion** provided for in Schedule A unless there is a provision in the **Contract** providing for additional compensation for early completion. No claim may be made for any alleged delay in **Substantial Completion** of the **Work** if the work is substantially completed by the date of **Substantial Completion** provided for in Schedule A unless acceleration has been directed by the **Commissioner** to meet the date of **Substantial Completion** set forth in Schedule A.

11.4.3 The provisions of this Article 11 apply only to claims for additional costs attributable to delay and do not preclude determinations by the **Commissioner** allowing reimbursements for additional costs for **Extra Work** pursuant to Articles 25 and 26 of this **Contract**. To the extent that any cost attributable to delay is reimbursed as part of a change order, no additional claim for compensation under this Article 11 shall be allowed.

11.5 Non-Compensable Delays. The **Contractor** agrees to make no claim for, and is deemed to have included in its bid prices for the various items of the **Contract**, the extra/additional costs attributable to any delays caused by or attributable to the items set forth below. For such items, the **Contractor** shall be compensated, if at all, solely by an extension of time to complete the performance of the **Work**, in accordance with the provisions of Article 13. Such extensions of time will be granted, if at all, pursuant to the grounds set forth in Article 13.3.

11.5.1 The acts or omissions of any third parties, including but not limited to **Other Contractors**, public/ governmental bodies (other than **City Agencies**), utilities or private enterprises, who are disclosed in the **Contract Documents** or are ordinarily encountered or generally recognized as related to the **Work**;

11.5.2 Any situation which was within the contemplation of the parties at the time of entering into the **Contract**, including any delay indicated or disclosed in the **Contract Documents** or generally recognized as related to the nature of the **Work**, and/or the existence of any facility or appurtenance owned, operated or maintained by any third party, as indicated or disclosed in the **Contract Documents** or ordinarily encountered or generally recognized as related to the nature of the **Work**;

11.5.3 Restraining orders, injunctions or judgments issued by a court which were caused by a Contractor's submission, action or inaction or by a Contractor's **Means and Methods of**

Construction, or by third parties, unless such order, injunction or judgment was the result of an action or omission by the **City**;

11.5.4 Any labor boycott, strike, picketing, lockout or similar situation;

11.5.5 Any shortages of supplies or materials, or unavailability of equipment, required by the **Contract Work**;

11.5.6 Climatic conditions, storms, floods, droughts, tidal waves, fires, hurricanes, earthquakes, landslides or other catastrophes or acts of God, or acts of war or of the public enemy or terrorist acts, including the **City's** reasonable responses thereto; and

11.5.7 **Extra Work** which does not significantly affect the overall completion of the **Contract**, reasonable delays in the review or issuance of change orders or field orders and/or in shop drawing reviews or approvals.

11.6 Required Content of Submission of Statement of Delay Damages

11.6.1 In the verified written statement of delay damages required by Article 11.1.2, the following information shall be provided by the **Contractor**:

11.6.1.1 For each delay, the start and end dates of the claimed periods of delay and, in addition, a description of the operations that were delayed, an explanation of how they were delayed, and the reasons for the delay, including identifying the applicable act or omission of the City listed in Article 11.4.

11.6.1.2 A detailed factual statement of the claim providing all necessary dates, locations and items of **Work** affected by the claim.

11.6.1.3 The amount of additional compensation sought and a breakdown of that amount into categories as described in Article 26.2, subject to the limitations set forth in Article 11.7.

11.6.1.4 Any additional information requested by the **Commissioner**.

11.7 Recoverable Costs

11.7.1 Delay damages may be recoverable for the following costs actually and necessarily incurred in the performance of the **Work**:

11.7.1.1 Direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits, based on time and materials records;

11.7.1.2 Necessary materials (including transportation to the **Site**), based on time and material records;

11.7.1.3 Reasonable rental value of necessary plant and equipment other than small tools, plus fuel/energy costs according to the applicable formula set forth in Articles 26.2.4 and/or 26.2.8, based on time and material records;

11.7.1.4 Insurance and bond costs;

11.7.1.5 Extended field office costs;

11.7.1.6 Extended **Site** overhead; and

11.7.1.7 Extended home office overhead.

11.7.2 Recoverable Subcontractor Costs. When the **Work** is performed by a **Subcontractor**, the **Contractor** may be paid the actual and necessary costs of such subcontracted **Work** as outlined above in Articles 11.7.1.1 through 11.7.1.6, and an

additional overhead of five (5%) percent of the costs outlined in Articles 11.7.1.1 through 11.7.1.3.

11.7.3 Non-Recoverable Costs. The parties agree that the **City** will have no liability for the following items and the **Contractor** agrees it shall make no claim for the following items:

11.7.3.1 Profit, or loss of anticipated or unanticipated profit;

11.7.3.2 Consequential damages, including but not limited to interest on monies in dispute, including interest which is paid on such monies, loss of bonding capacity, bidding opportunities, or interest in investment, or any resulting insolvency;

11.7.3.3 Indirect costs or expenses of any nature;

11.7.3.4 Direct or indirect costs attributable to performance of **Work** where the **Contractor**, because of situations or conditions within its control, has not progressed the **Work** in a satisfactory manner; and

11.7.3.5 Attorneys' fees and dispute and claims preparation expenses.

11.8 Determinations under this Article 11 are not subject to the jurisdiction of the Contract Dispute Resolution Board pursuant to the dispute resolution process set forth in Article 27.

11.9 If the parties agree, pursuant to Article 11.1.3 above, that a compensable delay has occurred and agree on the amount of compensation, payment may be made pursuant to a written change order. Payment pursuant to such change order is subject to pre-audit by the **Engineering Audit Officer**, and may be post-audited by the **Comptroller** and/or the **Agency**.

ARTICLE 12. COORDINATION WITH OTHER CONTRACTORS

12.1 During the progress of the **Work**, **Other Contractors** may be engaged in performing other work or may be awarded other contracts for additional work on this **Project**. In that event, the **Contractor** shall coordinate the **Work** to be done hereunder with the work of such **Other Contractors** and the **Contractor** shall fully cooperate with such **Other Contractors** and carefully fit its own **Work** to that provided under other contracts as may be directed by the **Engineer**. The **Contractor** shall not commit or permit any act which will interfere with the performance of work by any **Other Contractors**.

12.2 If the **Engineer** determines that the **Contractor** is failing to coordinate its **Work** with the work of **Other Contractors** as the **Engineer** has directed, then the **Commissioner** shall have the right to withhold any payments otherwise due hereunder until the **Contractor** completely complies with the **Engineer's** directions.

12.3 The **Contractor** shall notify the **Engineer** in writing if any **Other Contractor** on this **Project** is failing to coordinate its work with the **Work** of this **Contract**. If the **Engineer** finds such charges to be true, the **Engineer** shall promptly issue such directions to the **Other Contractor** with respect thereto as the situation may require. The **City** shall not, however, be liable for any damages suffered by any **Other Contractor's** failure to coordinate its work with the **Work** of this **Contract** or by reason of the **Other Contractor's** failure to promptly comply with the directions so issued by the **Engineer**, or by reason of any **Other Contractor's** default in performance, it being understood that the **City** does not guarantee the responsibility or continued efficiency of any contractor. The **Contractor** agrees to make no claim against

the **City** for any damages relating to or arising out of any directions issued by the **Engineer** pursuant to this Article 12 (including but not limited to the failure of any **Other Contractor** to comply or promptly comply with such directions), or the failure of the **Engineer** to issue any directions, or the failure of any **Other Contractor** to coordinate its work, or the default in performance of any **Other Contractor**.

12.4 The **Contractor** shall indemnify and hold the **City** harmless from any and all claims or judgments for damages and from costs and expenses to which the **City** may be subjected or which it may suffer or incur by reason of the **Contractor's** failure to comply with the **Engineer's** directions promptly; and the **Comptroller** shall have the right to exercise the powers reserved in Article 23 with respect to any claims which may be made for damages due to the **Contractor's** failure to comply with the **Engineer's** directions promptly. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.5 Should the **Contractor** sustain any damage through any act or omission of any **Other Contractor** having a contract with the **City** for the performance of work upon the **Site** or of work which may be necessary to be performed for the proper prosecution of the **Work** to be performed hereunder, or through any act or omission of a subcontractor of such **Other Contractor**, the **Contractor** shall have no claim against the **City** for such damage, but shall have a right to recover such damage from the **Other Contractor** under the provision similar to the following provisions which apply to this **Contract** and have been or will be inserted in the contracts with such **Other Contractors**:

12.5.1 Should any **Other Contractor** having or who shall hereafter have a contract with the **City** for the performance of work upon the **Site** sustain any damage through any act or omission of the **Contractor** hereunder or through any act or omission of any **Subcontractor** of the **Contractor**, the **Contractor** agrees to reimburse such **Other Contractor** for all such damages and to defend at its own expense any action based upon such claim and if any judgment or claim (even if the allegations of the action are without merit) against the **City** shall be allowed the **Contractor** shall pay or satisfy such judgment or claim and pay all costs and expenses in connection therewith and agrees to indemnify and hold the **City** harmless from all such claims. Insofar as the facts and **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent provided by **Law**.

12.6 The **City's** right to indemnification hereunder shall in no way be diminished, waived or discharged by its recourse to assessment of liquidated damages as provided in Article 15, or by the exercise of any other remedy provided for by **Contract** or by **Law**.

ARTICLE 13. EXTENSION OF TIME FOR PERFORMANCE

13.1 If performance by the **Contractor** is delayed for a reason set forth in Article 13.3, the **Contractor** may be allowed a reasonable extension of time in conformance with this Article 13 and the **PPB Rules**.

13.2 Any extension of time may be granted only by the **ACCO** or by the Board for the Extension of Time (hereafter "Board") (as set forth below) upon written application by the **Contractor**.

13.3 Grounds for Extension: If such application is made, the **Contractor** shall be entitled to an extension of time for delay in completion of the **Work** caused solely:

13.3.1 By the acts or omissions of the **City**, its officials, agents or employees; or

13.3.2 By the act or omissions of **Other Contractors** on this **Project**; or

13.3.3 By supervening conditions entirely beyond the control of either party hereto (such as, but not limited to, acts of God or the public enemy, excessive inclement weather, war or other national emergency making performance temporarily impossible or illegal, or strikes or labor disputes not brought about by any act or omission of the **Contractor**).

13.3.4 The **Contractor** shall, however, be entitled to an extension of time for such causes only for the number of **Days** of delay which the **ACCO** or the Board may determine to be due solely to such causes, and then only if the **Contractor** shall have strictly complied with all of the requirements of Articles 9 and 10.

13.4 The **Contractor** shall not be entitled to receive a separate extension of time for each of several causes of delay operating concurrently, but, if at all, only for the actual period of delay in completion of the **Work** as determined by the **ACCO** or the Board, irrespective of the number of causes contributing to produce such delay. If one of several causes of delay operating concurrently results from any act, fault or omission of the **Contractor** or of its **Subcontractors** or **Materialmen**, and would of itself (irrespective of the concurrent causes) have delayed the **Work**, no extension of time will be allowed for the period of delay resulting from such act, fault or omission.

13.5 The determination made by the **ACCO** or the Board on an application for an extension of time shall be binding and conclusive on the **Contractor**.

13.6 The **ACCO** or the Board acting entirely within their discretion may grant an application for an extension of time for causes of delay other than those herein referred.

13.7 Permitting the **Contractor** to continue with the **Work** after the time fixed for its completion has expired, or after the time to which such completion may have been extended has expired, or the making of any payment to the **Contractor** after such time, shall in no way operate as a waiver on the part of the **City** of any of its rights under this **Contract**.

13.8 Application for Extension of Time:

13.8.1 Before the **Contractor's** time extension request will be considered, the **Contractor** shall notify the **ACCO** of the condition which allegedly has caused or is causing the delay, and shall submit a written application to the **ACCO** identifying:

13.8.1(a) The **Contractor**; the registration number; and **Project** description;

13.8.1(b) Liquidated damage assessment rate, as specified in the **Contract**;

13.8.1(c) Original total bid price;

13.8.1(d) The original **Contract** start date and completion date;

13.8.1(e) Any previous time extensions granted (number and duration); and

13.8.1(f) The extension of time requested.

13.8.2 In addition, the application for extension of time shall set forth in detail:

13.8.2(a) The nature of each alleged cause of delay in completing the **Work**;

13.8.2(b) The date upon which each such cause of delay began and ended and the number of **Days** attributable to each such cause;

13.8.2(c) A statement that the **Contractor** waives all claims except for those delineated in the application, and the particulars of any claims which the **Contractor** does not agree to waive. For time extensions for **Substantial Completion** and final completion payments, the application shall include a detailed statement of the dollar amounts of each element of claim item reserved; and

13.8.2(d) A statement indicating the **Contractor's** understanding that the time extension is granted only for purposes of permitting continuation of **Contract** performance and payment for **Work** performed and that the **City** retains its right to conduct an investigation and assess liquidated damages as appropriate in the future.

13.9 Analysis and Approval of Time Extensions:

13.9.1 For time extensions for partial payments, a written determination shall be made by the **ACCO** who may, for good and sufficient cause, extend the time for the performance of the **Contract** as follows:

13.9.1(a) If the **Work** is to be completed within six (6) months, the time for performance may be extended for sixty (60) **Days**;

13.9.1(b) If the **Work** is to be completed within less than one (1) year but more than six (6) months, an extension of ninety (90) **Days** may be granted;

13.9.1(c) If the **Contract** period exceeds one (1) year, besides the extension granted in Article 13.9.1(b), an additional thirty (30) **Days** may be granted for each multiple of six (6) months involved beyond the one (1) year period; or

13.9.1(d) If exceptional circumstances exist, the **ACCO** may extend the time for performance beyond the extensions in Articles 13.9.1(a), 13.9.1(b), and 13.9.1(c). In that event, the **ACCO** shall file with the Mayor's Office of Contract Services a written explanation of the exceptional circumstances.

13.9.2 For extensions of time for **Substantial Completion** and final completion payments, the **Engineer**, in consultation with the **ACCO**, shall prepare a written analysis of the delay (including a preliminary determination of the causes of delay, the beginning and end dates for each such cause of delay, and whether the delays are excusable under the terms of this **Contract**). The report shall be subject to review by and approval of the Board, which shall have authority to question its analysis and determinations and request additional facts or documentation. The report as reviewed and made final by the Board shall be made a part of the **Agency** contract file. Neither the report itself nor anything contained therein shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

13.9.3 Approval Mechanism for Time Extensions for **Substantial Completion** or Final Completion Payments: An extension shall be granted only with the approval of the Board which is comprised of the **ACCO** of the **Agency**, the **City** Corporation Counsel, and the **Comptroller**, or their authorized representatives.

13.9.4 Neither the granting of any application for an extension of time to the **Contractor** or any **Other Contractor** on this **Project** nor the papers, records or reports related to any application for or grant of an extension of time or determination related thereto shall be referred to or offered in evidence by the **Contractor** or its attorneys in any action or proceeding.

13.10 No Damage for Delay: The **Contractor** agrees to make no claim for damages for delay in the performance of this **Contract** occasioned by any act or omission to act of the **City** or any of its representatives, except as provided for in Article 11.

ARTICLE 14. COMPLETION AND FINAL ACCEPTANCE OF THE WORK

14.1 Date for **Substantial Completion**: The **Contractor** shall substantially complete the **Work** within the time fixed in Schedule A of the General Conditions, or within the time to which such **Substantial Completion** may be extended.

14.2 Determining the Date of **Substantial Completion**: The **Work** will be deemed to be substantially complete when the two conditions set forth below have been met.

14.2.1 Inspection: The **Engineer** has inspected the **Work** and has made a written determination that it is substantially complete.

14.2.2 Approval of **Final Approved Punch List** and Date for **Final Acceptance**: Following inspection of the **Work**, the **Engineer** shall furnish the **Contractor** with a final punch list, specifying all items of **Work** to be completed and proposing dates for the completion of each specified item of **Work**. The **Contractor** shall then submit in writing to the **Engineer** within ten (10) **Days** of the **Engineer** furnishing the final punch list either acceptance of the dates or proposed alternative dates for the completion of each specified item of **Work**. If the **Contractor** proposes alternative dates, then, within a reasonable time after receipt, the **Engineer**, in a written notification to the **Contractor**, shall approve the **Contractor's** completion dates or, if they are unable to agree, the **Engineer** shall establish dates for the completion of each item of **Work**. If the **Contractor** neither accepts the dates nor proposes alternative dates within ten (10) **Days**, the schedule proposed by the **Engineer** shall be deemed accepted. The latest completion date specified shall be the date for **Final Acceptance** of the **Work**.

14.3 Date of **Substantial Completion**. The date of approval of the **Final Approved Punch List**, shall be the date of **Substantial Completion**. The date of approval of the **Final Approved Punch List** shall be either (a) if the **Contractor** approves the final punch list and proposed dates for completion furnished by the **Engineer**, the date of the **Contractor's** approval; or (b) if the **Contractor** neither accepts the dates nor proposes alternative dates, ten (10) **Days** after the **Engineer** furnishes the **Contractor** with a final punch list and proposed dates for completion; or (c) if the **Contractor** proposes alternative dates, the date that the **Engineer** sends written notification to the **Contractor** either approving the **Contractor's** proposed alternative dates or establishing dates for the completion for each item of **Work**.

14.4 Determining the Date of **Final Acceptance**: The **Work** will be accepted as final and complete as of the date of the **Engineer's** inspection if, upon such inspection, the **Engineer** finds that all items on the **Final Approved Punch List** are complete and no further **Work** remains to be done. The **Commissioner** will then issue a written determination of **Final Acceptance**.

14.5 Request for Inspection: Inspection of the **Work** by the **Engineer** for the purpose of **Substantial Completion** or **Final Acceptance** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.6 Request for Re-inspection: If upon inspection for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer** determines that there are items of **Work** still to be performed, the **Contractor** shall promptly perform them and then request a re-inspection. If upon re-inspection, the **Engineer** determines that the **Work** is substantially complete or finally accepted, the date of such re-inspection shall be the date of **Substantial Completion** or **Final Acceptance**. Re-inspection by the **Engineer** shall be made within ten (10) **Days** after receipt of the **Contractor's** written request therefor.

14.7 Initiation of Inspection by the **Engineer**: If the **Contractor** does not request inspection or re-inspection of the **Work** for the purpose of **Substantial Completion** or **Final Acceptance**, the **Engineer** may initiate such inspection or re-inspection.

ARTICLE 15. LIQUIDATED DAMAGES

15.1 In the event the **Contractor** fails to substantially complete the **Work** within the time fixed for such **Substantial Completion** in Schedule A of the General Conditions, plus authorized time extensions, or if the **Contractor**, in the sole determination of the **Commissioner**, has abandoned the **Work**, the **Contractor** shall pay to the **City** the sum fixed in Schedule A of the General Conditions, for each and every **Day** that the time consumed in substantially completing the **Work** exceeds the time allowed therefor; which said sum, in view of the difficulty of accurately ascertaining the loss which the **City** will suffer by reason of delay in the **Substantial Completion** of the **Work** hereunder, is hereby fixed and agreed as the liquidated damages that the **City** will suffer by reason of such delay, and not as a penalty. This Article 15 shall also apply to the **Contractor** whether or not the **Contractor** is defaulted pursuant to Chapter X of this **Contract**. Neither the failure to assess liquidated damages nor the granting of any time extension shall operate as a waiver or release of any claim the **City** may have against the **Contractor** for either actual or liquidated damages.

15.2 Liquidated damages received hereunder are not intended to be nor shall they be treated as either a partial or full waiver or discharge of the **City's** right to indemnification, or the **Contractor's** obligation to indemnify the **City**, or to any other remedy provided for in this **Contract** or by **Law**.

15.3 The **Commissioner** may deduct and retain out of the monies which may become due hereunder, the amount of any such liquidated damages; and in case the amount which may become due hereunder shall be less than the amount of liquidated damages suffered by the **City**, the **Contractor** shall be liable to pay the difference.

ARTICLE 16. OCCUPATION OR USE PRIOR TO COMPLETION

16.1 Unless otherwise provided for in the **Specifications**, the **Commissioner** may take over, use, occupy or operate any part of the **Work** at any time prior to **Final Acceptance**, upon written notification to the **Contractor**. The **Engineer** shall inspect the part of the **Work** to be taken over, used, occupied, or operated, and will furnish the **Contractor** with a written statement of the **Work**, if any, which remains to be performed on such part. The **Contractor** shall not object to, nor interfere with, the **Commissioner's** decision to exercise the rights granted by Article 16. In the event the **Commissioner** takes over, uses, occupies, or operates any part of the **Work**:

16.1.1 the **Engineer** shall issue a written determination of **Substantial Completion** with respect to such part of the **Work**;

16.1.2 the **Contractor** shall be relieved of its absolute obligation to protect such part of the unfinished **Work** in accordance with Article 7;

16.1.3 the **Contractor's** guarantee on such part of the **Work** shall begin on the date of such use by the **City**; and;

16.1.4 the **Contractor** shall be entitled to a return of so much of the amount retained in accordance with Article 21 as it relates to such part of the **Work**, except so much thereof as may be retained under Articles 24 and 44.

CHAPTER IV SUBCONTRACTS AND ASSIGNMENTS

ARTICLE 17. SUBCONTRACTS

17.1 The **Contractor** shall not make subcontracts totaling an amount more than the percentage of the total **Contract** price fixed in Schedule A of the General Conditions, without prior written permission from the **Commissioner**. All subcontracts made by the **Contractor** shall be in writing. No **Work** may be performed by a **Subcontractor** prior to the **Contractor** entering into a written subcontract with the **Subcontractor** and complying with the provisions of this Article 17.

17.2 Before making any subcontracts, the **Contractor** shall submit a written statement to the **Commissioner** giving the name and address of the proposed **Subcontractor**; the portion of the **Work** and materials which it is to perform and furnish; the cost of the subcontract; the VENDEX questionnaire if required; the proposed subcontract if requested by the **Commissioner**; and any other information tending to prove that the proposed **Subcontractor** has the necessary facilities, skill, integrity, past experience, and financial resources to perform the **Work** in accordance with the terms and conditions of this **Contract**.

17.3 In addition to the requirements in Article 17.2, **Contractor** is required to list the **Subcontractor** in the web based Subcontractor Reporting System through the City's Payee Information Portal (PIP), available at www.nyc.gov/pip.¹ For each **Subcontractor** listed, **Contractor** is required to provide the following information: maximum contract value, description of **Subcontractor's** **Work**, start and end date of the subcontract and identification of the **Subcontractor's** industry. Thereafter, **Contractor** will be required to report in the system the payments made to each **Subcontractor** within 30 days of making the payment. If any of the required information changes throughout the Term of the **Contract**, **Contractor** will be required to revise the information in the system.

Failure of the **Contractor** to list a **Subcontractor** and/or to report **Subcontractor** payments in a timely fashion may result in the **Commissioner** declaring the **Contractor** in default of the **Contract** and will subject **Contractor** to liquidated damages in the amount of \$100 per day for each day that the **Contractor** fails to identify a **Subcontractor** along with the required information about the **Subcontractor** and/or fails to report payments to a **Subcontractor**, beyond the time frames set forth herein or in the notice from the **City**. Article 15 shall govern the issue of liquidated damages.

¹ In order to use the new system, a PIP account will be required. Detailed instructions on creating a PIP account and using the new system are also available at www.nyc.gov/pip. Additional assistance with PIP may be obtained by emailing the Financial Information Services Agency Help Desk at pip@fisa.nyc.gov.

17.4 If an approved **Subcontractor** elects to subcontract any portion of its subcontract, the proposed sub-subcontract shall be submitted in the same manner as directed above.

17.5 The **Commissioner** will notify the **Contractor** in writing whether the proposed **Subcontractor** is approved. If the proposed **Subcontractor** is not approved, the **Contractor** may submit another proposed **Subcontractor** unless the **Contractor** decides to do the **Work**. No **Subcontractor** shall be permitted to enter or perform any work on the **Site** unless approved.

17.6 Before entering into any subcontract hereunder, the **Contractor** shall provide the proposed **Subcontractor** with a complete copy of this document and inform the proposed **Subcontractor** fully and completely of all provisions and requirements of this **Contract** relating either directly or indirectly to the **Work** to be performed and the materials to be furnished under such subcontract, and every such **Subcontractor** shall expressly stipulate that all labor performed and materials furnished by the **Subcontractor** shall strictly comply with the requirements of this **Contract**.

17.7 Documents given to a prospective **Subcontractor** for the purpose of soliciting the **Subcontractor's** bid shall include either a copy of the bid cover or a separate information sheet setting forth the **Project** name, the **Contract** number (if available), the **Agency** (as noted in Article 2.1.6), and the **Project's** location.

17.8 The **Commissioner's** approval of a **Subcontractor** shall not relieve the **Contractor** of any of its responsibilities, duties, and liabilities hereunder. The **Contractor** shall be solely responsible to the **City** for the acts or defaults of its **Subcontractor** and of such **Subcontractor's** officers, agents, and employees, each of whom shall, for this purpose, be deemed to be the agent or employee of the **Contractor** to the extent of its subcontract.

17.9 If the **Subcontractor** fails to maintain the necessary facilities, skill, integrity, past experience, and financial resources (other than due to the **Contractor's** failure to make payments where required) to perform the **Work** in accordance with the terms and conditions of this **Contract**, the **Contractor** shall promptly notify the **Commissioner** and replace such **Subcontractor** with a newly approved **Subcontractor** in accordance with this Article 17.

17.10 The **Contractor** shall be responsible for ensuring that all **Subcontractors** performing **Work** at the **Site** maintain all insurance required by **Law**.

17.11 The **Contractor** shall promptly, upon request, file with the **Engineer** a conformed copy of the subcontract and its cost. The subcontract shall provide the following:

17.11.1 **Payment to Subcontractors:** The agreement between the **Contractor** and its **Subcontractor** shall contain the same terms and conditions as to method of payment for **Work**, labor, and materials, and as to retained percentages, as are contained in this **Contract**.

17.11.2 **Prevailing Rate of Wages:** The agreement between the **Contractor** and its **Subcontractor** shall include the prevailing wage rates and supplemental benefits to be paid in accordance with Labor Law Section 220.

17.11.3 **Section 6-123 of the Administrative Code:** Pursuant to the requirements of Section 6-123 of the Administrative Code, every agreement between the **Contractor** and a **Subcontractor** in excess of fifty thousand (\$50,000) dollars shall include a provision that the **Subcontractor** shall not engage in any unlawful discriminatory practice as defined in Title VIII of the Administrative Code (Section 8-101 *et seq.*).

17.11.4 All requirements required pursuant to federal and/or state grant agreement(s), if applicable to the **Work**.

17.12 The **Commissioner** may deduct from the amounts certified under this **Contract** to be due to the **Contractor**, the sum or sums due and owing from the **Contractor** to the **Subcontractors** according to the terms of the said subcontracts, and in case of dispute between the **Contractor** and its **Subcontractor**, or **Subcontractors**, as to the amount due and owing, the **Commissioner** may deduct and withhold from the amounts certified under this **Contract** to be due to the **Contractor** such sum or sums as may be claimed by such **Subcontractor**, or **Subcontractors**, in a sworn affidavit, to be due and owing until such time as such claim or claims shall have been finally resolved.

17.13 On contracts where performance bonds and payment bonds are executed, the **Contractor** shall include on each requisition for payment the following data: **Subcontractor's** name, value of the subcontract, total amount previously paid to **Subcontractor** for **Work** previously requisitioned, and the amount, including retainage, to be paid to the **Subcontractor** for **Work** included in the requisition.

17.14 On **Contracts** where performance bonds and payment bonds are not executed, the **Contractor** shall include with each requisition for payment submitted hereunder, a signed statement from each and every **Subcontractor** and/or **Materialman** for whom payment is requested in such requisition. Such signed statement shall be on the letterhead of the **Subcontractor** and/or **Materialman** for whom payment is requested and shall (i) verify that such **Subcontractor** and/or **Materialman** has been paid in full for all **Work** performed and/or material supplied to date, exclusive of any amount retained and any amount included on the current requisition, and (ii) state the total amount of retainage to date, exclusive of any amount retained on the current requisition.

ARTICLE 18. ASSIGNMENTS

18.1 The **Contractor** shall not assign, transfer, convey or otherwise dispose of this **Contract**, or the right to execute it, or the right, title or interest in or to it or any part thereof, or assign, by power of attorney or otherwise any of the monies due or to become due under this **Contract**, unless the previous written consent of the **Commissioner** shall first be obtained thereto, and the giving of any such consent to a particular assignment shall not dispense with the necessity of such consent to any further or other assignments.

18.2 Such assignment, transfer, conveyance or other disposition of this **Contract** shall not be valid until filed in the office of the **Commissioner** and the **Comptroller**, with the written consent of the **Commissioner** endorsed thereon or attached thereto.

18.3 Failure to obtain the previous written consent of the **Commissioner** to such an assignment, transfer, conveyance or other disposition, may result in the revocation and annulment of this **Contract**. The **City** shall thereupon be relieved and discharged from any further liability to the **Contractor**, its assignees, transferees or sublessees, who shall forfeit and lose all monies therefor earned under the **Contract**, except so much as may be required to pay the **Contractor's** employees.

18.4 The provisions of this clause shall not hinder, prevent, or affect an assignment by the **Contractor** for the benefit of its creditors made pursuant to the **Laws** of the State of New York.

18.5 This **Contract** may be assigned by the **City** to any corporation, agency or instrumentality having authority to accept such assignment.

**CHAPTER V
CONTRACTOR'S SECURITY AND GUARANTEE**

ARTICLE 19. SECURITY DEPOSIT

19.1 If performance and payment bonds are required, the **City** shall retain the bid security to ensure that the successful bidder executes the **Contract** and furnishes the required payment and performance security within ten (10) **Days** after notice of the award of the **Contract**. If the successful bidder fails to execute the **Contract** and furnish the required payment and performance security, the **City** shall retain such bid security as set forth in the Information for Bidders. If the successful bidder executes the **Contract** and furnishes the required payment and performance security, the **City** shall return the bid security within a reasonable time after the furnishing of such bonds and execution of the **Contract** by the **City**.

19.2 If performance and payment bonds are not required, the bid security shall be retained by the **City** as security for the **Contractor's** faithful performance of the **Contract**. If partial payments are provided, the bid security will be returned to the **Contractor** after the sum retained under Article 21 equals the amount of the bid security, subject to other provisions of this **Contract**. If partial payments are not provided, the bid security will be released when final payment is certified by the **City** for payment.

19.3 If the **Contractor** is declared in default under Article 48 prior to the return of the deposit, or if any claim is made such as referred to in Article 23, the amount of such deposit, or so much thereof as the **Comptroller** may deem necessary, may be retained and then applied by the **Comptroller**:

19.3.1 To compensate the **City** for any expense, loss or damage suffered or incurred by reason of or resulting from such default, including the cost of re-letting and liquidated damages; or

19.3.2 To indemnify the **City** against any and all claims.

ARTICLE 20. PAYMENT GUARANTEE

20.1 On **Contracts** where one hundred (100%) percent performance bonds and payment bonds are executed, this Article 20 does not apply.

20.2 In the event the terms of this **Contract** do not require the **Contractor** to provide a payment bond or where the **Contract** does not require a payment bond for one hundred (100%) percent of the **Contract** price, the **City** shall, in accordance with the terms of this Article 20, guarantee payment of all lawful claims for:

20.2.1 Wages and compensation for labor performed and/or services rendered; and

20.2.2 Materials, equipment, and supplies provided, whether incorporated into the **Work** or not, when demands have been filed with the **City** as provided hereinafter by any person, firm, or corporation which furnished labor, material, equipment, supplies, or any combination thereof, in connection with the **Work** performed hereunder (hereinafter referred to as the "beneficiary") at the direction of the **City** or the **Contractor**.

20.3 The provisions of Article 20.2 are subject to the following limitations and conditions:

20.3.1 If the **Contractor** provides a payment bond for a value that is less than one hundred (100%) percent of the value of the **Contract Work**, the payment bond provided by the **Contractor** shall be primary (and non-contributing) to the payment guarantee provided under this Article 20.

20.3.2 The guarantee is made for the benefit of all beneficiaries as defined in Article 20.2 provided that those beneficiaries strictly adhere to the terms and conditions of Article 20.3.4 and 20.3.5.

20.3.3 Nothing in this Article 20 shall prevent a beneficiary providing labor, services or material for the **Work** from suing the **Contractor** for any amounts due and owing the beneficiary by the **Contractor**.

20.3.4 Every person who has furnished labor or material, to the **Contractor** or to a **Subcontractor** of the **Contractor**, in the prosecution of the **Work** and who has not been paid in full therefor before the expiration of a period of ninety (90) **Days** after the date on which the last of the labor was performed or material was furnished by him/her for which the claim is made, shall have the right to sue on this payment guarantee in his/her own name for the amount, or the balance thereof, unpaid at the time of commencement of the action; provided, however, that a person having a direct contractual relationship with a **Subcontractor** of the **Contractor** but no contractual relationship express or implied with the **Contractor** shall not have a right of action upon the guarantee unless he/she shall have given written notice to the **Contractor** within one hundred twenty (120) **Days** from the date on which the last of the labor was performed or the last of the material was furnished, for which his/her claim is made, stating with substantial accuracy the amount claimed and the name of the party to whom the material was furnished or for whom the labor was performed. The notice shall be served by delivering the same personally to the **Contractor** or by mailing the same by registered mail, postage prepaid, in an envelope addressed to the **Contractor** at any place where it maintains an office or conducts its business; provided, however, that where such notice is actually received by the **Contractor** by other means, such notice shall be deemed sufficient.

20.3.5 Except as provided in Labor Law Section 220-g, no action on this payment guarantee shall be commenced after the expiration of the one-year limitations period set forth in Section 137(4)(b) of the State Finance Law.

20.3.6 The **Contractor** shall promptly forward to the **City** any notice or demand received pursuant to Article 20.3.4. The **Contractor** shall inform the **City** of any defenses to the notice or demand and shall forward to the **City** any documents the **City** requests concerning the notice or demand.

20.3.7 All demands made against the **City** by a beneficiary of this payment guarantee shall be presented to the **Engineer** along with all written documentation concerning the demand which the **Engineer** deems reasonably appropriate or necessary, which may include, but shall not be limited to: the subcontract; any invoices presented to the **Contractor** for payment; the notarized statement of the beneficiary that the demand is due and payable, that a request for payment has been made of the **Contractor** and that the demand has not been paid by the **Contractor** within the time allowed for such payment by the subcontract; and copies of any correspondence between the beneficiary and the **Contractor** concerning such demand. The **City** shall notify the **Contractor** that a demand has been made. The **Contractor** shall inform the **City** of any defenses to the demand and shall forward to the **City** any documents the **City** requests concerning the demand.

20.3.8 The **City** shall make payment only if, after considering all defenses presented by the **Contractor**, it determines that the payment is due and owing to the beneficiary making the demand.

20.3.9 No beneficiary shall be entitled to interest from the **City**, or to any other costs, including, but not limited to, attorneys' fees, except to the extent required by State Finance Law Section 137.

20.4 Upon the receipt by the **City** of a demand pursuant to this Article 20, the **City** may withhold from any payment otherwise due and owing to the **Contractor** under this **Contract** an amount sufficient to satisfy the demand.

20.4.1 In the event the **City** determines that the demand is valid, the **City** shall notify the **Contractor** of such determination and the amount thereof and direct the **Contractor** to immediately pay such amount to the beneficiary. In the event the **Contractor**, within seven (7) **Days** of receipt of such notification from the **City**, fails to pay the beneficiary, such failure shall constitute an automatic and irrevocable assignment of payment by the **Contractor** to the beneficiary for the amount of the demand determined by the **City** to be valid. The **Contractor**, without further notification or other process, hereby gives its unconditional consent to such assignment of payment to the beneficiary and authorizes the **City**, on its behalf, to take all necessary actions to implement such assignment of payment, including without limitation the execution of any instrument or documentation necessary to effectuate such assignment.

20.4.2 In the event that the amount otherwise due and owing to the **Contractor** by the **City** is insufficient to satisfy such demand, the **City** may, at its option, require payment from the **Contractor** of an amount sufficient to cover such demand and exercise any other right to require or recover payment which the **City** may have under **Law** or **Contract**.

20.4.3 In the event the **City** determines that the demand is invalid, any amount withheld pending the **City's** review of such demand shall be paid to the **Contractor**; provided, however, no lien has been filed. In the event a claim or an action has been filed, the terms and conditions set forth in Article 23 shall apply. In the event a lien has been filed, the parties will be governed by the provisions of the Lien Law of the State of New York.

20.5 The provisions of this Article 20 shall not prevent the **City** and the **Contractor** from resolving disputes in accordance with the **PPB** Rules, where applicable.

20.6 In the event the **City** determines that the beneficiary is entitled to payment pursuant to this Article 20, such determination and any defenses and counterclaims raised by the **Contractor** shall be taken into account in evaluating the **Contractor's** performance.

20.7 Nothing in this Article 20 shall relieve the **Contractor** of the obligation to pay the claims of all persons with valid and lawful claims against the **Contractor** relating to the **Work**.

20.8 The **Contractor** shall not require any performance, payment or other bonds of any **Subcontractor** if this **Contract** does not require such bonds of the **Contractor**.

20.9 The payment guarantee made pursuant to this Article 20 shall be construed in a manner consistent with Section 137 of the State Finance Law and shall afford to persons furnishing labor or materials to the **Contractor** or its **Subcontractors** in the prosecution of the **Work** under this **Contract** all of the rights and remedies afforded to such persons by such section, including but not limited to, the right

to commence an action against the City on the payment guarantee provided by this Article 20 within the one-year limitations period set forth in Section 137(4)(b).

ARTICLE 21. RETAINED PERCENTAGE

21.1 If this **Contract** requires one hundred (100%) percent performance and payment security, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.2 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded does not exceed one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, five (5%) percent of the value of **Work** certified for payment in each partial payment voucher.

21.3 If this **Contract** does not require one hundred (100%) percent performance and payment security and if the price for which this **Contract** was awarded exceeds one million (\$1,000,000) dollars, then as further security for the faithful performance of this **Contract**, the **Commissioner** shall deduct, and retain until the substantial completion of the **Work**, up to ten (10%) percent of the value of **Work** certified for payment in each partial payment voucher. The percentage to be retained is set forth in Schedule A of the General Conditions.

ARTICLE 22. INSURANCE

22.1 Types of Insurance: The **Contractor** shall procure and maintain the following types of insurance if, and as indicated, in Schedule A of the General Conditions (with the minimum limits and special conditions specified in Schedule A). Such insurance shall be maintained from the date the **Contractor** is required to provide Proof of Insurance pursuant to Article 22.3.1 through the date of completion of all required **Work** (including punch list work as certified in writing by the **Resident Engineer**), except for insurance required pursuant to Article 22.1.4, which may terminate upon **Substantial Completion** of the **Contract**. All insurance shall meet the requirements set forth in this Article 22. Wherever this Article requires that insurance coverage be "at least as broad" as a specified form (including all ISO forms), there is no obligation that the form itself be used, provided that the **Contractor** can demonstrate that the alternative form or endorsement contained in its policy provides coverage at least as broad as the specified form.

22.1.1 Commercial General Liability Insurance: The **Contractor** shall provide Commercial General Liability Insurance covering claims for property damage and/or bodily injury, including death, which may arise from any of the operations under this **Contract**. Coverage under this insurance shall be at least as broad as that provided by the latest edition of Insurance Services Office ("ISO") Form CG 0001. Such insurance shall be "occurrence" based rather than "claims-made" and include, without limitation, the following types of coverage: premises operations; products and completed operations; contractual liability (including the tort liability of another assumed in a contract); broad form property damage; independent contractors; explosion, collapse and underground (XCU); construction means and methods; and incidental malpractice. Such insurance shall contain a "per project" aggregate limit, as specified in Schedule A, that applies separately to operations under this **Contract**.

22.1.1(a) Such Commercial General Liability Insurance shall name the **City** as an Additional Insured. Coverage for the City shall specifically include the **City's** officials and employees, be at least as broad as the latest edition of ISO Form CG 20 10 and provide completed operations coverage at least as broad as the latest edition of ISO Form CG 20 37.

22.1.1(b) Such Commercial General Liability Insurance shall name all other entities designated as additional insureds in Schedule A but only for claims arising from the **Contractor's** operations under this **Contract**, with coverage at least as broad as the latest edition of ISO Form CG 20 26.

22.1.1(c) If the **Work** requires a permit from the Department of Buildings pursuant to 1 RCNY Section 101-08, at http://www.nyc.gov/html/dob/downloads/rules/1_RCNY_101-08.pdf, the **Contractor** shall provide Commercial General Liability Insurance with limits of at least those required by 1 RCNY section 101-08. If the **Work** does not require such a permit, the minimum limits shall be those provided for in Schedule A.

22.1.1(d) If any of the **Work** includes repair of a waterborne vessel owned by or to be delivered to the **City**, such Commercial General Liability shall include, or be endorsed to include, Ship Repairer's Legal Liability Coverage to protect against, without limitation, liability arising from navigation of such vessels prior to delivery to and acceptance by the **City**.

22.1.2 Workers' Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance: The **Contractor** shall provide, and shall cause its **Subcontractors** to provide, Workers Compensation Insurance, Employers' Liability Insurance, and Disability Benefits Insurance in accordance with the **Laws** of the State of New York on behalf of all employees providing services under this **Contract** (except for those employees, if any, for which the **Laws** require insurance only pursuant to Article 22.1.3).

22.1.3 United States Longshoremen's and Harbor Workers Act and/or Jones Act Insurance: If specified in Schedule A of the General Conditions or if required by **Law**, the **Contractor** shall provide insurance in accordance with the United States Longshoremen's and Harbor Workers Act and/or the Jones Act, on behalf of all qualifying employees providing services under this **Contract**.

22.1.4 Builders Risk Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall provide Builders Risk Insurance on a completed value form for the total value of the **Work** through **Substantial Completion** of the **Work** in its entirety. Such insurance shall be provided on an All Risk basis and include coverage, without limitation, for windstorm (including named windstorm), storm surge, flood and earth movement. Unless waived by the **Commissioner**, it shall include coverage for ordinance and law, demolition and increased costs of construction, debris removal, pollutant clean up and removal, and expediting costs. Such insurance shall cover, without limitation, (a) all buildings and/or structures involved in the **Work**, as well as temporary structures at the **Site**, and (b) any property that is intended to become a permanent part of such building or structure, whether such property is on the **Site**, in transit or in temporary storage. Policies shall name the **Contractor** as Named Insured and list the **City** as both an Additional Insured and a Loss Payee as its interest may appear.

22.1.4(a) Policies of such insurance shall specify that, in the event a loss occurs at an occupied facility, occupancy of such facility is permitted without the consent of the issuing insurance company.

22.1.4(b) Such insurance may be provided through an Installation Floater, at the **Contractor's** option, if it otherwise conforms with the requirements of this Article 22.1.4.

22.1.5 Commercial Automobile Liability Insurance: The **Contractor** shall provide Commercial Automobile Liability Insurance for liability arising out of ownership, maintenance or use of any owned (if any), non-owned and hired vehicles to be used in connection with this **Contract**. Coverage shall be at least as broad as the latest edition of ISO Form CA0001. If vehicles are used for transporting hazardous materials, the Automobile Liability Insurance shall be endorsed to provide pollution liability broadened coverage for covered vehicles (endorsement CA 99 48) as well as proof of MCS 90.

22.1.6 Contractors Pollution Liability Insurance: If specified in Schedule A of the General Conditions, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Contractors Pollution Liability Insurance covering bodily injury and property damage. Such insurance shall provide coverage for actual, alleged or threatened emission, discharge, dispersal, seepage, release or escape of pollutants (including asbestos), including any loss, cost or expense incurred as a result of any cleanup of pollutants (including asbestos) or in the investigation, settlement or defense of any claim, action, or proceedings arising from the operations under this **Contract**. Such insurance shall be in the **Contractor's** name and list the **City** as an Additional Insured and any other entity specified in Schedule A. Coverage shall include, without limitation, (a) loss of use of damaged property or of property that has not been physically injured, (b) transportation, and (c) non-owned disposal sites.

22.1.6(a) Coverage for the **City** as Additional Insured shall specifically include the **City's** officials and employees and be at least as broad as provided to the **Contractor** for this **Project**.

22.1.6(b) If such insurance is written on a claims-made policy, such policy shall have a retroactive date on or before the effective date of this **Contract**, and continuous coverage shall be maintained, or an extended discovery period exercised, for a period of not less than three (3) years from the time the **Work** under this **Contract** is completed.

22.1.7 Marine Insurance:

22.1.7(a) Marine Protection and Indemnity Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Marine Protection and Indemnity Insurance with coverage at least as broad as Form SP-23. The insurance shall provide coverage for the **Contractor** or **Subcontractor** (whichever is doing this **Work**) and for the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured for bodily injury and property damage arising from marine operations under this **Contract**. Coverage shall include, without limitation, injury or death of crew members (if not fully provided through other insurance), removal of wreck, damage to piers, wharves and other fixed or floating objects and loss of or damage to any other vessel or craft, or to property on such other vessel or craft.

22.1.7(b) Hull and Machinery Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such **Work** to maintain, Hull and Machinery Insurance with coverage for the **Contractor** or **Subcontractor** (whichever is doing this Work) and for the **City** (together with its officials and employees) as Additional Insured at least as broad as the latest edition of American Institute Tug Form for all tugs used under this **Contract** and Collision Liability at least as broad as the latest edition of American Institute Hull Clauses.

22.1.7(c) Marine Pollution Liability Insurance: If specified in Schedule A of the General Conditions or if the **Contractor** engages in marine operations in the execution of any part of the **Work**, the **Contractor** shall maintain, or cause the **Subcontractor** doing such Work to maintain, Marine Pollution Liability Insurance covering itself (or the Subcontractor doing such Work) as Named Insured and the **City** (together with its officials and employees) and any other entity specified in Schedule A as an Additional Insured. Coverage shall be at least as broad as that provided by the latest edition of Water Quality Insurance Syndicate Form and include, without limitation, liability arising from the discharge or substantial threat of a discharge of oil, or from the release or threatened release of a hazardous substance including injury to, or economic losses resulting from, the destruction of or damage to real property, personal property or natural resources.

22.1.8 The **Contractor** shall provide such other types of insurance, at such minimum limits and with such conditions, as are specified in Schedule A of the General Conditions.

22.2 General Requirements for Insurance Coverage and Policies:

22.2.1 All required insurance policies shall be maintained with companies that may lawfully issue the required policy and have an A.M. Best rating of at least A-/VII or a Standard and Poor's rating of at least A, unless prior written approval is obtained from the **City** Corporation Counsel.

22.2.2 The **Contractor** shall be solely responsible for the payment of all premiums for all required policies and all deductibles and self-insured retentions to which such policies are subject, whether or not the **City** is an insured under the policy.

22.2.3 In his/her sole discretion, the **Commissioner** may, subject to the approval of the **Comptroller** and the **City** Corporation Counsel, accept Letters of Credit and/or custodial accounts in lieu of required insurance.

22.2.4 The **City's** limits of coverage for all types of insurance required pursuant to Schedule A of the General Conditions shall be the greater of (i) the minimum limits set forth in Schedule A or (ii) the limits provided to the **Contractor** as Named Insured under all primary, excess, and umbrella policies of that type of coverage.

22.2.5 The **Contractor** may satisfy its insurance obligations under this Article 22 through primary policies or a combination of primary and excess/umbrella policies, so long as all policies provide the scope of coverage required herein.

22.2.6 Policies of insurance provided pursuant to this Article 22 shall be primary and non-contributing to any insurance or self-insurance maintained by the **City**.

22.3 Proof of Insurance:

22.3.1 For all types of insurance required by Article 22.1 and Schedule A, except for insurance required by Articles 22.1.4 and 22.1.7, the **Contractor** shall file proof of insurance in accordance with this Article 22.3 within ten (10) **Days** of award. For insurance provided pursuant to Articles 22.1.4 and 22.1.7, proof shall be filed by a date specified by the **Commissioner** or ten (10) **Days** prior to the commencement of the portion of the **Work** covered by such policy, whichever is earlier.

22.3.2 For Workers' Compensation Insurance provided pursuant to Article 22.1.2, the **Contractor** shall submit one of the following forms: C-105.2 Certificate of Workers' Compensation Insurance; U-26.3 - State Insurance Fund Certificate of Workers' Compensation Insurance; Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. For Disability Benefits Insurance provided pursuant to Article 22.1.2, the Contractor shall submit DB-120.1 - Certificate Of Insurance Coverage Under The NYS Disability Benefits Law, Request for WC/DB Exemption (Form CE-200); equivalent or successor forms used by the New York State Workers' Compensation Board; or other proof of insurance in a form acceptable to the **Commissioner**. ACORD forms are not acceptable.

22.3.3 For policies provided pursuant to all of Article 22.1 other than Article 22.1.2, the **Contractor** shall submit one or more Certificates of Insurance on forms acceptable to the **Commissioner**. All such Certificates of Insurance shall certify (a) the issuance and effectiveness of such policies of insurance, each with the specified minimum limits (b) for insurance secured pursuant to Article 22.1.1 that the **City** and any other entity specified in Schedule A is an Additional Insured with coverage at least as broad as the most recent edition of ISO Forms CG 20 10, CG 20 37, and CG 20 26, as applicable; (c) in the event insurance is required pursuant to Article 22.1.6 and/or Article 22.1.7, that the **City** is an Additional Insured thereunder; (d) the company code issued to the insurance company by the National Association of Insurance Commissioners (the NAIC number); and (e) the number assigned to the **Contract** by the **City**. All such Certificates of Insurance shall be accompanied by either a duly executed "Certification by Broker" in the form contained in Part III of Schedule A or copies of all policies referenced in such Certificate of Insurance as certified by an authorized representative of the issuing insurance carrier. If any policy is not available at the time of submission, certified binders may be submitted until such time as the policy is available, at which time a certified copy of the policy shall be submitted.

22.3.4 Documentation confirming renewals of insurance shall be submitted to the **Commissioner** prior to the expiration date of coverage of policies required under this **Contract**. Such proofs of insurance shall comply with the requirements of Articles 22.3.2 and 22.3.3.

22.3.5 The **Contractor** shall be obligated to provide the **City** with a copy of any policy of insurance provided pursuant to this Article 22 upon the demand for such policy by the **Commissioner** or the **City** Corporation Counsel.

22.4 Operations of the Contractor:

22.4.1 The **Contractor** shall not commence the **Work** unless and until all required certificates have been submitted to and accepted by the **Commissioner**. Acceptance by the **Commissioner** of a certificate does not excuse the **Contractor** from securing insurance

consistent with all provisions of this Article 22 or of any liability arising from its failure to do so.

22.4.2 The **Contractor** shall be responsible for providing continuous insurance coverage in the manner, form, and limits required by this **Contract** and shall be authorized to perform **Work** only during the effective period of all required coverage.

22.4.3 In the event that any of the required insurance policies lapse, are revoked, suspended or otherwise terminated, for whatever cause, the **Contractor** shall immediately stop all **Work**, and shall not recommence **Work** until authorized in writing to do so by the **Commissioner**. Upon quitting the **Site**, except as otherwise directed by the **Commissioner**, the **Contractor** shall leave all plant, materials, equipment, tools, and supplies on the **Site**. **Contract** time shall continue to run during such periods and no extensions of time will be granted. The **Commissioner** may also declare the **Contractor** in default for failure to maintain required insurance.

22.4.4 In the event the **Contractor** receives notice, from an insurance company or other person, that any insurance policy required under this Article 22 shall be cancelled or terminated (or has been cancelled or terminated) for any reason, the **Contractor** shall immediately forward a copy of such notice to both the **Commissioner** and the New York City Comptroller, attn: Office of Contract Administration, Municipal Building, One Centre Street, room 1005, New York, New York 10007. Notwithstanding the foregoing, the **Contractor** shall ensure that there is no interruption in any of the insurance coverage required under this Article 22.

22.4.5 Where notice of loss, damage, occurrence, accident, claim or suit is required under an insurance policy maintained in accordance with this Article 22, the **Contractor** shall notify in writing all insurance carriers that issued potentially responsive policies of any such event relating to any operations under this **Contract** (including notice to Commercial General Liability insurance carriers for events relating to the **Contractor's** own employees) no later than 20 days after such event. For any policy where the **City** is an Additional Insured, such notice shall expressly specify that "this notice is being given on behalf of the City of New York as Insured as well as the Named Insured." Such notice shall also contain the following information: the number of the insurance policy, the name of the named insured, the date and location of the damage, occurrence, or accident, and the identity of the persons or things injured, damaged or lost. The **Contractor** shall simultaneously send a copy of such notice to the City of New York c/o Insurance Claims Specialist, Affirmative Litigation Division, New York City Law Department, 100 Church Street, New York, New York 10007.

22.4.6 In the event of any loss, accident, claim, action, or other event that does or can give rise to a claim under any insurance policy required under this Article 22, the **Contractor** shall at all times fully cooperate with the **City** with regard to such potential or actual claim.

22.5 **Subcontractor Insurance:** In the event the **Contractor** requires any **Subcontractor** to procure insurance with regard to any operations under this **Contract** and requires such **Subcontractor** to name the **Contractor** as an **Additional Insured** thereunder, the **Contractor** shall ensure that the **Subcontractor** name the **City**, including its officials and employees, as an Additional Insured with coverage at least as broad as the most recent edition of ISO Form CG 20 26.

22.6 Wherever reference is made in Article 7 or this Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth in Schedule A of the General Conditions. In the event no address is set forth in Schedule A, such documents are to be sent to the **Commissioner's** address as provided elsewhere in this **Contract**.

22.7 Apart from damages or losses covered by insurance provided pursuant to Articles 22.1.2, 22.1.3, or 22.1.5, the **Contractor** waives all rights against the **City**, including its officials and employees, for any damages or losses that are covered under any insurance required under this Article 22 (whether or not such insurance is actually procured or claims are paid thereunder) or any other insurance applicable to the operations of the **Contractor** and/or its employees, agents, or **Subcontractors**.

22.8 In the event the **Contractor** utilizes a self-insurance program to satisfy any of the requirements of this Article 22, the **Contractor** shall ensure that any such self-insurance program provides the **City** with all rights that would be provided by traditional insurance under this Article 22, including but not limited to the defense and indemnification obligations that insurers are required to undertake in liability policies.

22.9 Materiality/Non-Waiver: The **Contractor's** failure to secure policies in complete conformity with this Article 22, or to give an insurance company timely notice of any sort required in this **Contract** or to do anything else required by this Article 22 shall constitute a material breach of this **Contract**. Such breach shall not be waived or otherwise excused by any action or inaction by the **City** at any time.

22.10 Pursuant to General Municipal Law Section 108, this **Contract** shall be void and of no effect unless **Contractor** maintains Workers' Compensation Insurance for the term of this **Contract** to the extent required and in compliance with the New York State Workers' Compensation Law.

22.11 Other Remedies: Insurance coverage provided pursuant to this Article 22 or otherwise shall not relieve the **Contractor** of any liability under this **Contract**, nor shall it preclude the **City** from exercising any rights or taking such other actions available to it under any other provisions of this **Contract** or **Law**.

ARTICLE 23. MONEY RETAINED AGAINST CLAIMS

23.1 If any claim shall be made by any person or entity (including **Other Contractors** with the **City** on this **Project**) against the **City** or against the **Contractor** and the **City** for any of the following:

- (a) An alleged loss, damage, injury, theft or vandalism of any of the kinds referred to in Articles 7 and 12, plus the reasonable costs of defending the **City**, which in the opinion of the **Comptroller** may not be paid by an insurance company (for any reason whatsoever); or
- (b) An infringement of copyrights, patents or use of patented articles, tools, etc., as referred to in Article 57; or
- (c) Damage claimed to have been caused directly or indirectly by the failure of the **Contractor** to perform the **Work** in strict accordance with this **Contract**,

the amount of such claim, or so much thereof as the **Comptroller** may deem necessary, may be withheld by the **Comptroller**, as security against such claim, from any money due hereunder. The **Comptroller**, in his/her discretion, may permit the **Contractor** to substitute other satisfactory security in lieu of the monies so withheld.

23.2 If an action on such claim is timely commenced and the liability of the **City**, or the **Contractor**, or both, shall have been established therein by a final judgment of a court of competent jurisdiction, or if such claim shall have been admitted by the **Contractor** to be valid, the **Comptroller**

shall pay such judgment or admitted claim out of the monies retained by the **Comptroller** under the provisions of this Article 23, and return the balance, if any, without interest, to the **Contractor**.

ARTICLE 24. MAINTENANCE AND GUARANTY

24.1 The **Contractor** shall promptly repair, replace, restore or rebuild, as the **Commissioner** may determine, any finished **Work** in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of **Substantial Completion** (or use and occupancy in accordance with Article 16), except where other periods of maintenance and guaranty are provided for in Schedule A.

24.2 As security for the faithful performance of its obligations hereunder, the **Contractor**, upon filing its requisition for payment on **Substantial Completion**, shall deposit with the **Commissioner** a sum equal to one (1%) percent of the price (or the amount fixed in Schedule A of the General Conditions) in cash or certified check upon a state or national bank and trust company or a check of such bank and trust company signed by a duly authorized officer thereof and drawn to the order of the **Comptroller**, or obligations of the **City**, which the **Comptroller** may approve as of equal value with the sum so required.

24.3 In lieu of the above, the **Contractor** may make such security payment to the **City** by authorizing the **Commissioner** in writing to deduct the amount from the **Substantial Completion** payment which shall be deemed the deposit required above.

24.4 If the **Contractor** has faithfully performed all of its obligations hereunder the **Commissioner** shall so certify to the **Comptroller** within five (5) **Days** after the expiration of one (1) year from the date of **Substantial Completion** and acceptance of the **Work** or within thirty (30) **Days** after the expiration of the guarantee period fixed in the **Specifications**. The security payment shall be repaid to the **Contractor** without interest within thirty (30) **Days** after certification by the **Commissioner** to the **Comptroller** that the **Contractor** has faithfully performed all of its obligations hereunder.

24.5 Notice by the **Commissioner** to the **Contractor** to repair, replace, rebuild or restore such defective or damaged **Work** shall be timely, pursuant to this article, if given not later than ten (10) **Days** subsequent to the expiration of the one (1) year period or other periods provided for herein.

24.6 If the **Contractor** shall fail to repair, replace, rebuild or restore such defective or damaged **Work** promptly after receiving such notice, the **Commissioner** shall have the right to have the **Work** done by others in the same manner as provided for in the completion of a defaulted **Contract**, under Article 51.

24.7 If the security payment so deposited is insufficient to cover the cost of such **Work**, the **Contractor** shall be liable to pay such deficiency on demand by the **Commissioner**.

24.8 The **Engineer's** certificate setting forth the fair and reasonable cost of repairing, replacing, rebuilding or restoring any damaged or defective **Work** when performed by one other than the **Contractor**, shall be binding and conclusive upon the **Contractor** as to the amount thereof.

24.9 The **Contractor** shall obtain all manufacturers' warranties and guaranties of all equipment and materials required by this **Contract** in the name of the **City** and shall deliver same to the **Commissioner**. All of the **City's** rights and title and interest in and to said manufacturers' warranties and guaranties may be assigned by the **City** to any subsequent purchasers of such equipment and materials or lessees of the premises into which the equipment and materials have been installed.

**CHAPTER VI
CHANGES, EXTRA WORK, AND DOCUMENTATION OF CLAIM**

ARTICLE 25. CHANGES

25.1 Changes may be made to this **Contract** only as duly authorized in writing by the **Commissioner** in accordance with the **Law** and this **Contract**. All such changes, modifications, and amendments will become a part of the **Contract**. **Work** so ordered shall be performed by the **Contractor**.

25.2 **Contract** changes will be made only for **Work** necessary to complete the **Work** included in the original scope of the **Contract** and/or for non-material changes to the scope of the **Contract**. Changes are not permitted for any material alteration in the scope of **Work** in the **Contract**.

25.3 The **Contractor** shall be entitled to a price adjustment for **Extra Work** performed pursuant to a written change order. Adjustments to price shall be computed in one or more of the following ways:

25.3.1 By applicable unit prices specified in the **Contract**; and/or

25.3.2 By agreement of a fixed price; and/or

25.3.3 By time and material records; and/or

25.3.4 In any other manner approved by the **CCPO**.

25.4 All payments for change orders are subject to pre-audit by the **Engineering Audit Officer** and may be post-audited by the **Comptroller** and/or the **Agency**.

ARTICLE 26. METHODS OF PAYMENT FOR OVERRUNS AND EXTRA WORK

26.1 Overrun of Unit Price Item: An overrun is any quantity of a unit price item which the **Contractor** is directed to provide which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule.

26.1.1 For any unit price item, the **Contractor** will be paid at the unit price bid for any quantity up to one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule. If during the progress of the **Work**, the actual quantity of any unit price item required to complete the **Work** approaches the estimated quantity for that item, and for any reason it appears that the actual quantity of any unit price item necessary to complete the **Work** will exceed the estimated quantity for that item by twenty-five (25%) percent, the **Contractor** shall immediately notify the **Engineer** of such anticipated overrun. The **Contractor** shall not be compensated for any quantity of a unit price item provided which is in excess of one hundred twenty-five (125%) percent of the estimated quantity for that item set forth in the bid schedule without written authorization from the **Engineer**.

26.1.2 If the actual quantity of any unit price item necessary to complete the **Work** will exceed one hundred twenty five (125%) percent of the estimated quantity for that item set forth in the bid schedule, the **City** reserves the right and the **Contractor** agrees to negotiate a new unit price for such item. In no event shall such negotiated new unit price exceed the unit bid price. If the **City** and **Contractor** cannot agree on a new unit price, then the **City** shall order the **Contractor** and the **Contractor** agrees to provide additional quantities of the

item on the basis of time and material records for the actual and reasonable cost as determined under Article 26.2, but in no event at a unit price exceeding the unit price bid.

26.2 Extra Work: For **Extra Work** where payment is by agreement on a fixed price in accordance with Article 25.3.2, the price to be paid for such **Extra Work** shall be based on the fair and reasonable estimated cost of the items set forth below. For **Extra Work** where payment is based on time and material records in accordance with Article 25.3.3, the price to be paid for such **Extra Work** shall be the actual and reasonable cost of the items set forth below, calculated in accordance with the formula specified therein, if any.

26.2.1 Necessary materials (including transportation to the **Site**); plus

26.2.2 Necessary direct labor, including payroll taxes (subject to statutory wage caps) and supplemental benefits; plus

26.2.3 Sales and personal property taxes, if any, required to be paid on materials not incorporated into such **Extra Work**; plus

26.2.4 Reasonable rental value of **Contractor**-owned (or **Subcontractor**-owned, as applicable), necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per operating hour: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. Reasonable rental value is defined as the lower of either seventy-five percent of the monthly prorated rental rates established in "The AED Green Book, Rental Rates and Specifications for Construction Equipment" published by Equipment Watch (the "Green Book"), or seventy-five percent of the monthly prorated rental rates established in the "Rental Rate Blue Book for Construction Equipment" published by Equipment Watch (the "Blue Book") (the applicable Blue Book rate being for rental only without the addition of any operational costs listed in the Blue Book). The reasonable rental value is deemed to be inclusive of all operating costs except for fuel/energy consumption and equipment operator's wages/costs. For multiple shift utilization, reimbursement shall be calculated as follows: first shift shall be seventy-five (75%) percent of such rental rates; second shift shall be sixty (60%) percent of the first shift rate; and third shift shall be forty (40%) percent of the first shift rate. Equipment on standby shall be reimbursed at one-third (1/3) the prorated monthly rental rate. **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment includes equipment from rental companies affiliated with or controlled by the **Contractor** (or **Subcontractor**, as applicable), as determined by the **Commissioner**. In establishing cost reimbursement for non-operating **Contractor**-owned (or **Subcontractor**-owned, as applicable) equipment (scaffolding, sheeting systems, road plates, etc.), the **City** may restrict reimbursement to a purchase-salvage/life cycle basis if less than the computed rental costs; plus

26.2.5 Necessary installation and dismantling of such plant and equipment, including transportation to and from the **Site**, if any, provided that, in the case of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) equipment rented from a third party, the cost of installation and dismantling are not allowable if such costs are included in the rental rate; plus

26.2.6 Necessary fees charged by governmental entities; plus

26.2.7 Necessary construction-related service fees charged by non-governmental entities, such as landfill tipping fees; plus

26.2.8 Reasonable rental costs of non-**Contractor**-owned (or non-**Subcontractor**-owned, as applicable) necessary plant and equipment other than **Small Tools**, plus fuel/energy costs. Except for fuel costs for pick-up trucks which shall be reimbursed based on a consumption of five (5) gallons per shift, fuel costs shall be reimbursed based on actual costs or, in the absence of auditable documentation, the following fuel consumption formula per hour of operation: $(.035) \times (\text{HP rating}) \times (\text{Fuel cost/gallon})$. In lieu of renting, the **City** reserves the right to direct the purchase of non-operating equipment (scaffolding, sheeting systems, road plates, etc.), with payment on a purchase-salvage/life cycle basis, if less than the projected rental costs; plus

26.2.9 Workers' Compensation Insurance, and any insurance coverage expressly required by the **City** for the performance of the **Extra Work** which is different than the types of insurance required by Article 22 and Schedule A of the General Conditions. The cost of Workers' Compensation Insurance is subject to applicable payroll limitation caps and shall be based upon the carrier's Manual Rate for such insurance derived from the applicable class Loss Cost ("LC") and carrier's Lost Cost Multiplier ("LCM") approved by the New York State Department of Financial Services, and with the exception of experience rating, rate modifiers as promulgated by the New York Compensation Insurance Rating Board ("NYCIRB"); plus

26.2.10 Additional costs incurred as a result of the **Extra Work** for performance and payment bonds; plus

26.2.11 Twelve percent (12%) percent of the total of items in Articles 26.2.1 through 26.2.5 as compensation for overhead, except that no percentage for overhead will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes. Overhead shall include without limitation, all costs and expenses in connection with administration, management superintendence, small tools, and insurance required by Schedule A of the General Conditions other than Workers' Compensation Insurance; plus

26.2.12 Ten (10%) percent of the total of items in Articles 26.2.1 through 26.2.5, plus the items in Article 26.2.11, as compensation for profit, except that no percentage for profit will be allowed on **Payroll Taxes** or on the premium portion of overtime pay or on sales and personal property taxes; plus

26.2.13 Five (5%) percent of the total of items in Articles 26.2.6 through 26.2.10 as compensation for overhead and profit.

26.3 Where the **Extra Work** is performed in whole or in part by other than the **Contractor's** own forces pursuant to Article 26.2, the **Contractor** shall be paid, subject to pre-audit by the **Engineering Audit Officer**, the cost of such **Work** computed in accordance with Article 26.2 above, plus an additional allowance of five (5%) percent to cover the **Contractor's** overhead and profit.

26.4 Where a change is ordered, involving both **Extra Work** and omitted or reduced **Contract Work**, the **Contract** price shall be adjusted, subject to pre-audit by the **EAO**, in an amount based on the difference between the cost of such **Extra Work** and of the omitted or reduced **Work**.

26.5 Where the **Contractor** and the **Commissioner** can agree upon a fixed price for **Extra Work** in accordance with Article 25.3.2 or another method of payment for **Extra Work** in accordance with Article

25.3.4, or for **Extra Work** ordered in connection with omitted **Work**, such method, subject to pre-audit by the **EAO**, may, at the option of the **Commissioner**, be substituted for the cost plus a percentage method provided in Article 26.2; provided, however, that if the **Extra Work** is performed by a **Subcontractor**, the **Contractor** shall not be entitled to receive more than an additional allowance of five (5%) percent for overhead and profit over the cost of such **Subcontractor's Work** as computed in accordance with Article 26.2.

ARTICLE 27. RESOLUTION OF DISPUTES

27.1 All disputes between the **City** and the **Contractor** of the kind delineated in this Article 27.1 that arise under, or by virtue of, this **Contract** shall be finally resolved in accordance with the provisions of this Article 27 and the **PPB** Rules. This procedure for resolving all disputes of the kind delineated herein shall be the exclusive means of resolving any such disputes.

27.1.1 This Article 27 shall not apply to disputes concerning matters dealt with in other sections of the **PPB** Rules, or to disputes involving patents, copyrights, trademarks, or trade secrets (as interpreted by the courts of New York State) relating to proprietary rights in computer software.

27.1.2 This Article 27 shall apply only to disputes about the scope of **Work** delineated by the **Contract**, the interpretation of **Contract** documents, the amount to be paid for **Extra Work** or disputed work performed in connection with the **Contract**, the conformity of the **Contractor's Work** to the **Contract**, and the acceptability and quality of the **Contractor's Work**; such disputes arise when the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** makes a determination with which the **Contractor** disagrees.

27.2 All determinations required by this Article 27 shall be made in writing clearly stated, with a reasoned explanation for the determination based on the information and evidence presented to the party making the determination. Failure to make such determination within the time required by this Article 27 shall be deemed a non-determination without prejudice that will allow application to the next level.

27.3 During such time as any dispute is being presented, heard, and considered pursuant to this Article 27, the **Contract** terms shall remain in force and the **Contractor** shall continue to perform **Work** as directed by the **ACCO** or the **Engineer**. Failure of the **Contractor** to continue **Work** as directed shall constitute a waiver by the **Contractor** of its claim.

27.4 Presentation of Disputes to **Commissioner**.

Notice of Dispute and Agency Response. The **Contractor** shall present its dispute in writing ("Notice of Dispute") to the **Commissioner** within thirty (30) Days of receiving written notice of the determination or action that is the subject of the dispute. This notice requirement shall not be read to replace any other notice requirements contained in the **Contract**. The Notice of Dispute shall include all the facts, evidence, documents, or other basis upon which the **Contractor** relies in support of its position, as well as a detailed computation demonstrating how any amount of money claimed by the **Contractor** in the dispute was arrived at. Within thirty (30) Days after receipt of the detailed written submission comprising the complete Notice of Dispute, the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** shall submit to the **Commissioner** all materials he or she deems pertinent to the dispute. Following initial submissions to the **Commissioner**, either party may demand of the other the production of any document or other material the demanding party believes may be relevant to the dispute. The requested party shall produce all relevant materials that are not otherwise

protected by a legal privilege recognized by the courts of New York State. Any question of relevancy shall be determined by the **Commissioner** whose decision shall be final. Willful failure of the **Contractor** to produce any requested material whose relevancy the **Contractor** has not disputed, or whose relevancy has been affirmatively determined, shall constitute a waiver by the **Contractor** of its claim.

27.4.1 **Commissioner Inquiry.** The **Commissioner** shall examine the material and may, in his or her discretion, convene an informal conference with the **Contractor**, the **ACCO**, and the **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner** to resolve the issue by mutual consent prior to reaching a determination. The **Commissioner** may seek such technical or other expertise as he or she shall deem appropriate, including the use of neutral mediators, and require any such additional material from either or both parties as he or she deems fit. The **Commissioner's** ability to render, and the effect of, a decision hereunder shall not be impaired by any negotiations in connection with the dispute presented, whether or not the **Commissioner** participated therein. The **Commissioner** may or, at the request of any party to the dispute, shall compel the participation of any **Other Contractor** with a contract related to the **Work** of this **Contract**, and that **Contractor** shall be bound by the decision of the **Commissioner**. Any **Other Contractor** thus brought into the dispute resolution proceeding shall have the same rights and obligations under this Article 27 as the **Contractor** initiating the dispute.

27.4.2 **Commissioner Determination.** Within thirty (30) **Days** after the receipt of all materials and information, or such longer time as may be agreed to by the parties, the **Commissioner** shall make his or her determination and shall deliver or send a copy of such determination to the **Contractor**, the **ACCO**, and **Engineer, Resident Engineer, Engineering Audit Officer**, or other designee of the **Commissioner**, as applicable, together with a statement concerning how the decision may be appealed.

27.4.3 **Finality of Commissioner's Decision.** The **Commissioner's** decision shall be final and binding on all parties, unless presented to the Contract Dispute Resolution Board pursuant to this Article 27. The **City** may not take a petition to the Contract Dispute Resolution Board. However, should the **Contractor** take such a petition, the **City** may seek, and the Contract Dispute Resolution Board may render, a determination less favorable to the **Contractor** and more favorable to the **City** than the decision of the **Commissioner**.

27.5 **Presentation of Dispute to the Comptroller.** Before any dispute may be brought by the **Contractor** to the Contract Dispute Resolution Board, the **Contractor** must first present its claim to the **Comptroller** for his or her review, investigation, and possible adjustment.

27.5.1 **Time, Form, and Content of Notice.** Within thirty (30) **Days** of its receipt of a decision by the **Commissioner**, the **Contractor** shall submit to the **Comptroller** and to the **Commissioner** a Notice of Claim regarding its dispute with the **Agency**. The Notice of Claim shall consist of (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written decision of the **Commissioner**; and (iii) a copy of all materials submitted by the **Contractor** to the **Agency**, including the Notice of Dispute. The **Contractor** may not present to the **Comptroller** any material not presented to the **Commissioner**, except at the request of the **Comptroller**.

27.5.2 **Response.** Within thirty (30) **Days** of receipt of the Notice of Claim, the **Agency** shall make available to the **Comptroller** a copy of all material submitted by the **Agency** to the **Commissioner** in connection with the dispute. The **Agency** may not present to the

Comptroller any material not presented to the **Commissioner** except at the request of the **Comptroller**.

27.5.3 **Comptroller Investigation.** The **Comptroller** may investigate the claim in dispute and, in the course of such investigation, may exercise all powers provided in Sections 7-201 and 7-203 of the Administrative Code. In addition, the **Comptroller** may demand of either party, and such party shall provide, whatever additional material the **Comptroller** deems pertinent to the claim, including original business records of the **Contractor**. Willful failure of the **Contractor** to produce within fifteen (15) **Days** any material requested by the **Comptroller** shall constitute a waiver by the **Contractor** of its claim. The **Comptroller** may also schedule an informal conference to be attended by the **Contractor**, **Agency** representatives, and any other personnel desired by the **Comptroller**.

27.5.4 **Opportunity of Comptroller to Compromise or Adjust Claim.** The **Comptroller** shall have forty-five (45) **Days** from his or her receipt of all materials referred to in Article 27.5.3 to investigate the disputed claim. The period for investigation and compromise may be further extended by agreement between the **Contractor** and the **Comptroller**, to a maximum of ninety (90) **Days** from the **Comptroller's** receipt of all materials. The **Contractor** may not present its petition to the Contract Dispute Resolution Board until the period for investigation and compromise delineated in this Article 27.5.4 has expired. In compromising or adjusting any claim hereunder, the **Comptroller** may not revise or disregard the terms of the **Contract** between the parties.

27.6 **Contract Dispute Resolution Board.** There shall be a Contract Dispute Resolution Board composed of:

27.6.1 The chief administrative law judge of the Office of Administrative Trials and Hearings (OATH) or his/her designated OATH administrative law judge, who shall act as chairperson, and may adopt operational procedures and issue such orders consistent with this Article 27 as may be necessary in the execution of the Contract Dispute Resolution Board's functions, including, but not limited to, granting extensions of time to present or respond to submissions;

27.6.2 The **CCPO** or his/her designee; any designee shall have the requisite background to consider and resolve the merits of the dispute and shall not have participated personally and substantially in the particular matter that is the subject of the dispute or report to anyone who so participated; and

27.6.3 A person with appropriate expertise who is not an employee of the **City**. This person shall be selected by the presiding administrative law judge from a prequalified panel of individuals, established and administered by OATH with appropriate background to act as decision-makers in a dispute. Such individual may not have a contract or dispute with the **City** or be an officer or employee of any company or organization that does, or regularly represents persons, companies, or organizations having disputes with the **City**.

27.7 **Petition to the Contract Dispute Resolution Board.** In the event the claim has not been settled or adjusted by the **Comptroller** within the period provided in this Article 27, the **Contractor**, within thirty (30) **Days** thereafter, may petition the Contract Dispute Resolution Board to review the **Commissioner's** determination.

27.7.1 **Form and Content of Petition by Contractor.** The **Contractor** shall present its dispute to the Contract Dispute Resolution Board in the form of a petition, which shall

include (i) a brief written statement of the substance of the dispute, the amount of money, if any, claimed, and the reason(s) the **Contractor** contends the dispute was wrongly decided by the **Commissioner**; (ii) a copy of the written Decision of the **Commissioner**, (iii) copies of all materials submitted by the **Contractor** to the Agency; (iv) a copy of the written decision of the **Comptroller**, if any, and (v) copies of all correspondence with, or written material submitted by the **Contractor**, to the **Comptroller**. The **Contractor** shall concurrently submit four (4) complete sets of the Petition: one set to the **City Corporation Counsel** (Attn: Commercial and Real Estate Litigation Division) and three (3) sets to the Contract Dispute Resolution Board at OATH's offices with proof of service on the **City Corporation Counsel**. In addition, the **Contractor** shall submit a copy of the written statement of the substance of the dispute, cited in (i) above, to both the **Commissioner** and the **Comptroller**.

27.7.2 **Agency Response.** Within thirty (30) **Days** of its receipt of the Petition by the **City Corporation Counsel**, the **Agency** shall respond to the brief written statement of the **Contractor** and make available to the Contract Dispute Resolution Board all material it submitted to the **Commissioner** and **Comptroller**. Three (3) complete copies of the **Agency** response shall be provided to the Contract Dispute Resolution Board and one to the **Contractor**. Extensions of time for submittal of the **Agency** response shall be given as necessary upon a showing of good cause or, upon consent of the parties, for an initial period of up to thirty (30) **Days**.

27.7.3 **Further Proceedings.** The Contract Dispute Resolution Board shall permit the **Contractor** to present its case by submission of memoranda, briefs, and oral argument. The Contract Dispute Resolution Board shall also permit the **Agency** to present its case in response to the **Contractor** by submission of memoranda, briefs, and oral argument. If requested by the **City Corporation Counsel**, the **Comptroller** shall provide reasonable assistance in the preparation of the **Agency's** case. Neither the **Contractor** nor the **Agency** may support its case with any documentation or other material that was not considered by the **Comptroller**, unless requested by the Contract Dispute Resolution Board. The Contract Dispute Resolution Board, in its discretion, may seek such technical or other expert advice as it shall deem appropriate and may seek, on its own or upon application of a party, any such additional material from any party as it deems fit. The Contract Dispute Resolution Board, in its discretion, may combine more than one dispute between the parties for concurrent resolution.

27.7.4 **Contract Dispute Resolution Board Determination.** Within forty-five (45) **Days** of the conclusion of all written submissions and oral arguments, the Contract Dispute Resolution Board shall render a written decision resolving the dispute. In an unusually complex case, the Contract Dispute Resolution Board may render its decision in a longer period, not to exceed ninety (90) **Days**, and shall so advise the parties at the commencement of this period. The Contract Dispute Resolution Board's decision must be consistent with the terms of the **Contract**. Decisions of the Contract Dispute Resolution Board shall only resolve matters before the Contract Dispute Resolution Board and shall not have precedential effect with respect to matters not before the Contract Dispute Resolution Board.

27.7.5 **Notification of Contract Dispute Resolution Board Decision.** The Contract Dispute Resolution Board shall send a copy of its decision to the **Contractor**, the **ACCO**, the Engineer, the **Comptroller**, the **City Corporation Counsel**, the **CCPO**, and the **PPB**. A decision in favor of the **Contractor** shall be subject to the prompt payment provisions of the **PPB Rules**. The Required Payment Date shall be thirty (30) **Days** after the date the parties are formally notified of the Contract Dispute Resolution Board's decision.

27.7.6 Finality of Contract Dispute Resolution Board Decision. The Contract Dispute Resolution

Board's decision shall be final and binding on all parties. Any party may seek review of the Contract Dispute Resolution Board's decision solely in the form of a challenge, filed within four (4) months of the date of the Contract Dispute Resolution Board's decision, in a court of competent jurisdiction of the State of New York, County of New York pursuant to Article 78 of the Civil Practice Law and Rules. Such review by the court shall be limited to the question of whether or not the Contract Dispute Resolution Board's decision was made in violation of lawful procedure, was affected by an error of **Law**, or was arbitrary and capricious or an abuse of discretion. No evidence or information shall be introduced or relied upon in such proceeding that was not presented to the Contract Dispute Resolution Board in accordance with this Article 27.

27.8 Any termination, cancellation, or alleged breach of the **Contract** prior to or during the pendency of any proceedings pursuant to this Article 27 shall not affect or impair the ability of the **Commissioner** or Contract Dispute Resolution Board to make a binding and final decision pursuant to this Article 27.

ARTICLE 28. RECORD KEEPING FOR EXTRA OR DISPUTED WORK OR WORK ON A TIME & MATERIALS BASIS

28.1 While the **Contractor** or any of its **Subcontractors** is performing **Work** on a time and material basis or **Extra Work** on a time and material basis ordered by the **Commissioner** under Article 25, or where the **Contractor** believes that it or any of its **Subcontractors** is performing **Extra Work** but a final determination by **Agency** has not been made, or the **Contractor** or any of its **Subcontractors** is performing disputed **Work** (whether on or off the **Site**), or complying with a determination or order under protest in accordance with Articles 11, 27, and 30, in each such case the **Contractor** shall furnish the **Resident Engineer** daily with three (3) copies of written statements signed by the **Contractor's** representative at the **Site** showing:

28.1.1 The name, trade, and number of each worker employed on such **Work** or engaged in complying with such determination or order, the number of hours employed, and the character of the **Work** each is doing; and

28.1.2 The nature and quantity of any materials, plant and equipment furnished or used in connection with the performance of such **Work** or compliance with such determination or order, and from whom purchased or rented.

28.2 A copy of such statement will be countersigned by the **Resident Engineer**, noting thereon any items not agreed to or questioned, and will be returned to the **Contractor** within two (2) **Days** after submission.

28.3 The **Contractor** and its **Subcontractors**, when required by the **Commissioner**, or the **Comptroller**, shall also produce for inspection, at the office of the **Contractor** or **Subcontractor**, any and all of its books, bid documents, financial statements, vouchers, records, daily job diaries and reports, and cancelled checks, and any other documents relating to showing the nature and quantity of the labor, materials, plant and equipment actually used in the performance of such **Work**, or in complying with such determination or order, and the amounts expended therefor, and shall permit the **Commissioner** and the **Comptroller** to make such extracts therefrom, or copies thereof, as they or either of them may desire.

28.4 In connection with the examination provided for herein, the **Commissioner**, upon demand therefor, will produce for inspection by the **Contractor** such records as the **Agency** may have with

respect to such **Extra Work** or disputed **Work** performed under protest pursuant to order of the **Commissioner**, except those records and reports which may have been prepared for the purpose of determining the accuracy and validity of the **Contractor's** claim.

28.5 Failure to comply strictly with these requirements shall constitute a waiver of any claim for extra compensation or damages on account of the performance of such **Work** or compliance with such determination or order.

ARTICLE 29. OMITTED WORK

29.1 If any **Contract Work** in a lump sum **Contract**, or if any part of a lump sum item in a unit price, lump sum, or percentage-bid **Contract** is omitted by the **Commissioner** pursuant to Article 33, the **Contract** price, subject to audit by the EAO, shall be reduced by a pro rata portion of the lump sum bid amount based upon the percent of **Work** omitted subject to Article 29.4. For the purpose of determining the pro rata portion of the lump sum bid amount, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be the determining factor.

29.2 If the whole of a lump sum item or units of any other item is so omitted by the **Commissioner** in a unit price, lump sum, or percentage-bid **Contract**, then no payment will be made therefor except as provided in Article 29.4.

29.3 For units that have been ordered but are only partially completed, the unit price shall be reduced by a pro rata portion of the unit price bid based upon the percentage of **Work** omitted subject to Article 29.4.

29.4 In the event the **Contractor**, with respect to any omitted **Work**, has purchased any non-cancelable material and/or equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated into the **Work**, the **Contractor** shall be paid for such material and/or equipment in accordance with Article 64.2.1(b); provided, however, such payment is contingent upon the **Contractor's** delivery of such material and/or equipment in acceptable condition to a location designated by the **City**.

29.5 The **Contractor** agrees to make no claim for damages or for loss of overhead and profit with regard to any omitted **Work**.

ARTICLE 30. NOTICE AND DOCUMENTATION OF COSTS AND DAMAGES; PRODUCTION OF FINANCIAL RECORDS

30.1 If the **Contractor** shall claim to be sustaining damages by reason of any act or omission of the **City** or its agents, it shall submit to the **Commissioner** within forty-five (45) **Days** from the time such damages are first incurred, and every thirty (30) **Days** thereafter for as long as such damages are incurred, verified statements of the details and the amounts of such damages, together with documentary evidence of such damages. The **Contractor** may submit any of the above statements within such additional time as may be granted by the **Commissioner** in writing upon written request therefor. Failure of the **Commissioner** to respond in writing to a written request for additional time within thirty (30) **Days** shall be deemed a denial of the request. On failure of the **Contractor** to strictly comply with the foregoing provisions, such claims shall be deemed waived and no right to recover on such claims shall exist. Damages that the **Contractor** may claim in any action or dispute resolution procedure arising under or by reason of this **Contract** shall not be different from or in excess of the statements and documentation made pursuant to this Article 30.

30.2 In addition to the foregoing statements, the **Contractor** shall, upon notice from the **Commissioner**, produce for examination at the **Contractor's** office, by the **Engineer, Architect or Project Manager**, all of its books of account, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**, and submit itself and persons in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.3 In addition to the statements required under Article 28 and this Article 30, the **Contractor** and/or its **Subcontractor** shall, within thirty (30) **Days** upon notice from the **Commissioner** or **Comptroller**, produce for examination at the **Contractor's** and/or **Subcontractor's** office, by a representative of either the **Commissioner** or **Comptroller**, all of its books of account, bid documents, financial statements, accountant workpapers, bills, invoices, payrolls, subcontracts, time books, daily reports, bank deposit books, bank statements, check books, and cancelled checks, showing all of its acts and transactions in connection with or relating to or arising by reason of this **Contract**. Further, the **Contractor** and/or its **Subcontractor** shall submit any person in its employment, for examination under oath by any person designated by the **Commissioner** or **Comptroller** to investigate claims made or disputes against the **City** under this **Contract**. At such examination, a duly authorized representative of the **Contractor** may be present.

30.4 Unless the information and examination required under Article 30.3 is provided by the **Contractor** and/or its **Subcontractor** upon thirty (30) **Days'** notice from the **Commissioner** or **Comptroller**, or upon the **Commissioner's** or **Comptroller's** written authorization to extend the time to comply, the **City** shall be released from all claims arising under, relating to or by reason of this **Contract**, except for sums certified by the **Commissioner** to be due under the provisions of this **Contract**. It is further stipulated and agreed that no person has the power to waive any of the foregoing provisions and that in any action or dispute resolution procedure against the **City** to recover any sum in excess of the sums certified by the **Commissioner** to be due under or by reason of this **Contract**, the **Contractor** must allege in its complaint and prove, at trial or during such dispute resolution procedure, compliance with the provisions of this Article 30.

30.5 In addition, after the commencement of any action or dispute resolution procedure by the **Contractor** arising under or by reason of this **Contract**, the **City** shall have the right to require the **Contractor** to produce for examination under oath, up until the trial of the action or hearing before the Contract Dispute Resolution Board, the books and documents described in Article 30.3 and submit itself and all persons in its employ for examination under oath. If this Article 30 is not complied with as required, then the **Contractor** hereby consents to the dismissal of the action or dispute resolution procedure.

CHAPTER VII
POWERS OF THE RESIDENT ENGINEER,
THE ENGINEER OR ARCHITECT AND THE COMMISSIONER

ARTICLE 31. THE RESIDENT ENGINEER

31.1 The **Resident Engineer** shall have the power to inspect, supervise, and control the performance of the **Work**, subject to review by the **Commissioner**. The **Resident Engineer** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 32. THE ENGINEER OR ARCHITECT OR PROJECT MANAGER

32.1 The **Engineer** or **Architect** or **Project Manager**, in addition to those matters elsewhere herein delegated to the **Engineer** and expressly made subject to his/her determination, direction or approval, shall have the power, subject to review by the **Commissioner**:

32.1.1 To determine the amount, quality, and location of the **Work** to be paid for hereunder; and

32.1.2 To determine all questions in relation to the **Work**, to interpret the **Contract Drawings, Specifications, and Addenda**, and to resolve all patent inconsistencies or ambiguities therein; and

32.1.3 To determine how the **Work** of this **Contract** shall be coordinated with **Work of Other Contractors** engaged simultaneously on this **Project**, including the power to suspend any part of the **Work**, but not the whole thereof; and

32.1.4 To make minor changes in the **Work** as he/she deems necessary, provided such changes do not result in a net change in the cost to the **City** or to the **Contractor** of the **Work** to be done under the **Contract**; and

32.1.5 To amplify the **Contract Drawings**, add explanatory information and furnish additional **Specifications** and drawings, consistent with this **Contract**.

32.2 The foregoing enumeration shall not imply any limitation upon the power of the **Engineer** or **Architect** or **Project Manager**, for it is the intent of this **Contract** that all of the **Work** shall generally be subject to his/her determination, direction, and approval, except where the determination, direction or approval of someone other than the **Engineer** or **Architect** or **Project Manager** is expressly called for herein.

32.3 The **Engineer** or **Architect** or **Project Manager** shall not, however, have the power to issue an **Extra Work** order, except as specifically designated in writing by the **Commissioner**.

ARTICLE 33. THE COMMISSIONER

33.1 The **Commissioner**, in addition to those matters elsewhere herein expressly made subject to his/her determination, direction or approval, shall have the power:

33.1.1 To review and make determinations on any and all questions in relation to this **Contract** and its performance; and

33.1.2 To modify or change this **Contract** so as to require the performance of **Extra Work** (subject, however, to the limitations specified in Article 25) or the omission of **Contract Work**; and

33.1.3 To suspend the whole or any part of the **Work** whenever in his/her judgment such suspension is required:

33.1.3(a) In the interest of the **City** generally; or

33.1.3(b) To coordinate the **Work** of the various contractors engaged on this **Project** pursuant to the provisions of Article 12; or

33.1.3(c) To expedite the completion of the entire **Project** even though the completion of this particular **Contract** may thereby be delayed.

ARTICLE 34. NO ESTOPPEL

34.1 Neither the **City** nor any **Agency**, official, agent or employee thereof, shall be bound, precluded or estopped by any determination, decision, approval, order, letter, payment or certificate made or given under or in connection with this **Contract** by the **City**, the **Commissioner**, the **Engineer**, the **Resident Engineer**, or any other official, agent or employee of the **City**, either before or after the final completion and acceptance of the **Work** and payment therefor:

34.1.1 From showing the true and correct classification, amount, quality or character of the **Work** actually done; or that any such determination, decision, order, letter, payment or certificate was untrue, incorrect or improperly made in any particular, or that the **Work**, or any part thereof, does not in fact conform to the requirements of this **Contract**; and

34.1.2 From demanding and recovering from the **Contractor** any overpayment made to it, or such damages as the **City** may sustain by reason of the **Contractor's** failure to perform each and every part of its **Contract**.

CHAPTER VIII LABOR PROVISIONS

ARTICLE 35. EMPLOYEES

35.1 The **Contractor** and its **Subcontractors** shall not employ on the **Work**:

35.1.1 Anyone who is not competent, faithful and skilled in the **Work** for which he/she shall be employed; and whenever the **Commissioner** shall inform the **Contractor**, in writing, that any employee is, in his/her opinion, incompetent, unfaithful or disobedient, that employee shall be discharged from the **Work** forthwith, and shall not again be employed upon it; or

35.1.2 Any labor, materials or means whose employment, or utilization during the course of this **Contract**, may tend to or in any way cause or result in strikes, work stoppages, delays, suspension of **Work** or similar troubles by workers employed by the **Contractor** or its **Subcontractors**, or by any of the trades working in or about the buildings and premises where **Work** is being performed under this **Contract**, or by **Other Contractors** or their **Subcontractors** pursuant to other contracts, or on any other building or premises owned or operated by the **City**, its **Agencies**, departments, boards or authorities. Any violation by the **Contractor** of this requirement may, upon certification of the **Commissioner**, be considered as proper and sufficient cause for declaring the **Contractor** to be in default, and for the **City** to take action against it as set forth in Chapter X of this **Contract**, or such other article of this **Contract** as the **Commissioner** may deem proper; or

35.1.3 In accordance with Section 220.3-e of the Labor Law of the State of New York (hereinafter "Labor Law"), the **Contractor** and its **Subcontractors** shall not employ on the **Work** any apprentice, unless he/she is a registered individual, under a bona fide program

registered with the New York State Department of Labor. The allowable ratio of apprentices to journey-level workers in any craft classification shall not be greater than the ratio permitted to the **Contractor** as to its work force on any job under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the wage rate determined by the **Comptroller** of the **City** for the classification of **Work** actually performed. The **Contractor** or **Subcontractor** will be required to furnish written evidence of the registration of its program and apprentices as well as all the appropriate ratios and wage rates, for the area of the construction prior to using any apprentices on the **Contract Work**.

35.2 If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, all laborers, workers, and mechanics employed in the performance of the **Contract** on the public work site, either by the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by the **Contract**, shall be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration.

35.3 In accordance with Local Law Nos. 30-2012 and 33-2012, codified at sections 6-132 and 12-113 of the Administrative Code, respectively,

35.3.1 The **Contractor** shall not take an adverse personnel action with respect to an officer or employee in retaliation for such officer or employee making a report of information concerning conduct which such officer or employee knows or reasonably believes to involve corruption, criminal activity, conflict of interest, gross mismanagement or abuse of authority by any officer or employee relating to this **Contract** to (a) the Commissioner of the Department of Investigation, (b) a member of the New York City Council, the Public Advocate, or the **Comptroller**, or (c) the **CCPO**, **ACCO**, **Agency** head, or **Commissioner**.

35.3.2 If any of the **Contractor's** officers or employees believes that he or she has been the subject of an adverse personnel action in violation of Article 35.3.1, he or she shall be entitled to bring a cause of action against the **Contractor** to recover all relief necessary to make him or her whole. Such relief may include but is not limited to: (a) an injunction to restrain continued retaliation, (b) reinstatement to the position such employee would have had but for the retaliation or to an equivalent position, (c) reinstatement of full fringe benefits and seniority rights, (d) payment of two times back pay, plus interest, and (e) compensation for any special damages sustained as a result of the retaliation, including litigation costs and reasonable attorney's fees.

35.3.3 The **Contractor** shall post a notice provided by the **City** in a prominent and accessible place on any site where work pursuant to the **Contract** is performed that contains information about:

35.3.3(a) how its employees can report to the New York City Department of Investigation allegations of fraud, false claims, criminality or corruption arising out of or in connection with the **Contract**; and

35.3.3(b) the rights and remedies afforded to its employees under Administrative Code sections 7-805 (the New York City False Claims Act) and 12-113 (the Whistleblower Protection Expansion Act) for lawful acts taken in connection with the reporting of allegations of fraud, false claims, criminality or corruption in connection with the **Contract**.

35.3.4 For the purposes of this Article 35.3, "adverse personnel action" includes dismissal, demotion, suspension, disciplinary action, negative performance evaluation, any action resulting in loss of staff, office space, equipment or other benefit, failure to appoint, failure to promote, or any transfer or assignment or failure to transfer or assign against the wishes of the affected officer or employee.

35.3.5 This Article 35.3 is applicable to all of the **Contractor's Subcontractors** having subcontracts with a value in excess of \$100,000; accordingly, the **Contractor** shall include this rider in all subcontracts with a value a value in excess of \$100,000.

35.4 Article 35.3 is not applicable to this **Contract** if it is valued at \$100,000 or less. Articles 35.3.1, 35.3.2, 35.3.4, and 35.3.5 are not applicable to this **Contract** if it was solicited pursuant to a finding of an emergency.

ARTICLE 36. NO DISCRIMINATION

36.1 The **Contractor** specifically agrees, as required by Labor Law Section 220-e, as amended, that:

36.1.1 In the hiring of employees for the performance of **Work** under this **Contract** or any subcontract hereunder, neither the **Contractor, Subcontractor**, nor any person acting on behalf of such **Contractor** or **Subcontractor**, shall by reason of race, creed, color or national origin discriminate against any citizen of the State of New York who is qualified and available to perform the **Work** to which the employment relates;

36.1.2 Neither the **Contractor, Subcontractor**, nor any person on its behalf shall, in any manner, discriminate against or intimidate any employee hired for the performance of **Work** under this **Contract** on account of race, creed, color or national origin;

36.1.3 There may be deducted from the amount payable to the **Contractor** by the **City** under this **Contract** a penalty of fifty (\$50.00) dollars for each person for each **Day** during which such person was discriminated against or intimidated in violation of the provisions of this **Contract**; and

36.1.4 This **Contract** may be cancelled or terminated by the **City** and all moneys due or to become due hereunder may be forfeited, for a second or any subsequent violation of the terms or conditions of this Article 36.

36.1.5 This Article 36 covers all construction, alteration and repair of any public building or public work occurring in the State of New York and the manufacture, sale, and distribution of materials, equipment, and supplies to the extent that such operations are performed within the State of New York pursuant to this **Contract**.

36.2 The **Contractor** specifically agrees, as required by Section 6-108 of the Administrative Code, as amended, that:

36.2.1 It shall be unlawful for any person engaged in the construction, alteration or repair of buildings or engaged in the construction or repair of streets or highways pursuant to a **Contract** with the **City** or engaged in the manufacture, sale or distribution of materials, equipment or supplies pursuant to a **Contract** with the **City** to refuse to employ or to refuse to continue in any employment any person on account of the race, color or creed of such person.

36.2.2 It shall be unlawful for any person or any servant, agent or employee of any person, described in Article 36.1.2, to ask, indicate or transmit, orally or in writing, directly or indirectly, the race, color or creed or religious affiliation of any person employed or seeking employment from such person, firm or corporation.

36.2.3 Breach of the foregoing provisions shall be deemed a violation of a material provision of this **Contract**.

36.2.4 Any person, or the employee, manager or owner of or officer of such firm or corporation who shall violate any of the provisions of this Article 36.2 shall, upon conviction thereof, be punished by a fine of not more than one hundred (\$100.00) dollars or by imprisonment for not more than thirty (30) **Days**, or both.

36.3 This **Contract** is subject to the requirements of Executive Order No. 50 (1980) ("E.O. 50"), as revised, and the rules and regulations promulgated thereunder. No contract will be awarded unless and until these requirements have been complied with in their entirety. By signing this **Contract**, the **Contractor** agrees that it:

36.3.1 Will not engage in any unlawful discrimination against any employee or applicant for employment because of race, creed, color, national origin, sex, age, disability, marital status or sexual orientation with respect to all employment decisions including, but not limited to, recruitment, hiring, upgrading, demotion, downgrading, transfer, training, rates of pay or other forms of compensation, layoff, termination, and all other terms and conditions of employment; and

36.3.2 Will not engage in any unlawful discrimination in the selection of **Subcontractors** on the basis of the owner's race, color, creed, national origin, sex, age, disability, marital status or sexual orientation; and

36.3.3 Will state in all solicitations or advertisements for employees placed by or on behalf of the **Contractor** that all qualified applicants will receive consideration for employment without unlawful discrimination based on race, creed, color, national origin, sex, age, citizens status, disability, marital status, sexual orientation, or that it is an equal employment opportunity employer; and

36.3.4 Will send to each labor organization or representative of workers with which it has a collective bargaining agreement or other contract or memorandum of understanding, written notification of its equal employment opportunity commitments under E.O. 50 and the rules and regulations promulgated thereunder; and

36.3.5 Will furnish, before the award of the **Contract**, all information and reports, including an employment report, that are required by E.O. 50, the rules and regulations promulgated thereunder, and orders of the **City Department of Business Services, Division of Labor Services (DLS)** and will permit access to its books, records, and accounts by the **DLS** for the purposes of investigation to ascertain compliance with such rules, regulations, and orders.

36.4 The **Contractor** understands that in the event of its noncompliance with the nondiscrimination clauses of this **Contract** or with any of such rules, regulations, or orders, such noncompliance shall constitute a material breach of this **Contract** and noncompliance with E.O. 50 and the rules and regulations promulgated thereunder. After a hearing held pursuant to the rules of the **DLS**, the Director of the **DLS** may direct the **Commissioner** to impose any or all of the following sanctions:

36.4.1 Disapproval of the **Contractor**; and/or

36.4.2 Suspension or termination of the **Contract**; and/or

36.4.3 Declaring the **Contractor** in default; and/or

36.4.4 In lieu of any of the foregoing sanctions, the Director of the **DLS** may impose an employment program.

In addition to any actions taken under this **Contract**, failure to comply with E.O. 50 and the rules and regulations promulgated thereunder, in one or more instances, may result in a **City Agency** declaring the **Contractor** to be non-responsible in future procurements. The **Contractor** further agrees that it will refrain from entering into any **Contract** or **Contract** modification subject to E.O. 50 and the rules and regulations promulgated thereunder with a **Subcontractor** who is not in compliance with the requirements of E.O. 50 and the rules and regulations promulgated thereunder.

36.5 The **Contractor** specifically agrees, as required by Section 6-123 of the Administrative Code, that:

36.5.1 The **Contractor** will not engage in any unlawful discriminatory practice in violation of Title 8 of the Administrative Code; and

36.5.2 Any failure to comply with this Article 36.5 may subject the **Contractor** to the remedies set forth in Section 6-123 of the Administrative Code, including, where appropriate, sanctions such as withholding of payment, imposition of an employment program, finding the **Contractor** to be in default, cancellation of the **Contract**, or any other sanction or remedy provided by **Law** or **Contract**.

ARTICLE 37. LABOR LAW REQUIREMENTS

37.1 The **Contractor** shall strictly comply with all applicable provisions of the Labor Law, as amended. Such compliance is a material term of this **Contract**.

37.2 The **Contractor** specifically agrees, as required by Labor Law Sections 220 and 220-d, as amended, that:

37.2.1 Hours of **Work**: No laborer, worker, or mechanic in the employ of the **Contractor**, **Subcontractor** or other person doing or contracting to do the whole or a part of the **Work** contemplated by this **Contract** shall be permitted or required to work more than eight (8) hours in any one (1) **Day**, or more than five (5) **Days** in any one (1) week, except as provided in the Labor Law and in cases of extraordinary emergency including fire, flood, or danger to life or property, or in the case of national emergency when so proclaimed by the President of the United States of America.

37.2.2 In situations in which there are not sufficient laborers, workers, and mechanics who may be employed to carry on expeditiously the **Work** contemplated by this **Contract** as a result of such restrictions upon the number of hours and **Days** of labor, and the immediate commencement or prosecution or completion without undue delay of the **Work** is necessary for the preservation of the **Site** and/or for the protection of the life and limb of the persons using the same, such laborers, workers, and mechanics shall be permitted or required to

work more than eight (8) hours in any one (1) **Day**; or five (5) **Days** in any one (1) week; provided, however, that upon application of any **Contractor**, the **Commissioner** shall have first certified to the Commissioner of Labor of the State of New York (hereinafter "Commissioner of Labor") that such public **Work** is of an important nature and that a delay in carrying it to completion would result in serious disadvantage to the public; and provided, further, that such Commissioner of Labor shall have determined that such an emergency does in fact exist as provided in Labor Law Section 220.2.

37.2.3 Failure of the **Commissioner** to make such a certification to the Commissioner of Labor shall not entitle the **Contractor** to damages for delay or for any cause whatsoever.

37.2.4 Prevailing Rate of Wages: The wages to be paid for a legal day's **Work** to laborers, workers, or mechanics employed upon the **Work** contemplated by this **Contract** or upon any materials to be used thereon shall not be less than the "prevailing rate of wage" as defined in Labor Law Section 220, and as fixed by the **Comptroller** in the attached Schedule of Wage Rates and in updated schedules thereof. The prevailing wage rates and supplemental benefits to be paid are those in effect at the time the **Work** is being performed.

37.2.5 Requests for interpretation or correction in the Information for Bidders includes all requests for clarification of the classification of trades to be employed in the performance of the **Work** under this **Contract**. In the event that a trade not listed in the **Contract** is in fact employed during the performance of this **Contract**, the **Contractor** shall be required to obtain from the **Agency** the prevailing wage rates and supplementary benefits for the trades used and to complete the performance of this **Contract** at the price at which the **Contract** was awarded.

37.2.6 Minimum Wages: Except for employees whose wage is required to be fixed pursuant to Labor Law Section 220, all persons employed by the **Contractor** and any **Subcontractor** in the manufacture or furnishing of the supplies, materials, or equipment, or the furnishing of work, labor, or services, used in the performance of this **Contract**, shall be paid, without subsequent deduction or rebate unless expressly authorized by **Law**, not less than the sum mandated by **Law**.

37.3 Working Conditions: No part of the **Work**, labor or services shall be performed or rendered by the **Contractor** in any plants, factories, buildings or surroundings or under working conditions which are unsanitary or hazardous or dangerous to the health and safety of employees engaged in the performance of this **Contract**. Compliance with the safety, sanitary, and factory inspection **Laws** of the state in which the **Work** is to be performed shall be prima facie evidence of compliance with this Article 37.3.

37.4 Prevailing Wage Enforcement: The **Contractor** agrees to pay for all costs incurred by the **City** in enforcing prevailing wage requirements, including the cost of any investigation conducted by or on behalf of the **Agency** or the **Comptroller**, where the **City** discovers a failure to comply with any of the requirements of this Article 37 by the **Contractor** or its **Subcontractor(s)**. The **Contractor** also agrees that, should it fail or refuse to pay for any such investigation, the **Agency** is hereby authorized to deduct from a **Contractor's** account an amount equal to the cost of such investigation.

37.4.1 The Labor Law Section 220 and Section 220-d, as amended, provide that this **Contract** shall be forfeited and no sum paid for any **Work** done hereunder on a second conviction for willfully paying less than:

37.4.1(a) The stipulated prevailing wage scale as provided in Labor Law section 220, as amended, or

37.4.1(b) The stipulated minimum hourly wage scale as provided in Labor Law section 220-d, as amended.

37.4.2 For any breach or violation of either working conditions (Article 37.3) or minimum wages (Article 37.2.6) provisions, the party responsible therefor shall be liable to the **City** for liquidated damages, which may be withheld from any amounts due on any contracts with the **City** of such party responsible, or may be recovered in actions brought by the **City** Corporation Counsel in the name of the **City**, in addition to damages for any other breach of this **Contract**, for a sum equal to the amount of any underpayment of wages due to any employee engaged in the performance of this **Contract**. In addition, the **Commissioner** shall have the right to cancel contracts and enter into other contracts for the completion of the original contract, with or without public letting, and the original **Contractor** shall be liable for any additional cost. All sums withheld or recovered as deductions, rebates, refunds, or underpayment of wages hereunder, shall be held in a special deposit account and shall be paid without interest, on order of the **Comptroller**, directly to the employees who have been paid less than minimum rates of pay as set forth herein and on whose account such sums were withheld or recovered, provided that no claims by employees for such payments shall be entertained unless made within two (2) years from the date of actual notice to the **Contractor** of the withholding or recovery of such sums by the **City**.

37.4.3 A determination by the **Comptroller** that a **Contractor** and/or its **Subcontractor** willfully violated Labor Law Section 220 will be forwarded to the **City's** five District Attorneys for review.

37.4.4 The **Contractor's** or **Subcontractor's** noncompliance with this Article 37.4 and Labor Law Section 220 may result in an unsatisfactory performance evaluation and the **Comptroller** may also find and determine that the **Contractor** or **Subcontractor** willfully violated the New York Labor Law.

37.4.4(a) An unsatisfactory performance evaluation for noncompliance with this Article 37.4 may result in a determination that the **Contractor** is a non-responsible bidder on subsequent procurements with the **City** and thus a rejection of a future award of a contract with the **City**, as well as any other sanctions provided for by Law.

37.4.4(b) Labor Law Section 220-b, as amended, provides that when two (2) final determinations have been rendered against a **Contractor** or **Subcontractor** within any consecutive six (6) year period determining that such **Contractor** or **Subcontractor** has willfully failed to pay the prevailing rate of wages or to provide supplements in accordance with the Labor Law and this Article 37.4, whether such failures were concurrent or consecutive and whether or not such final determinations concerning separate public works projects are rendered simultaneously, such **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the second final determination. If the final determination involves the falsification of payroll records or the kickback of wages or supplements, the **Contractor** or **Subcontractor** shall be ineligible to submit a bid on or be awarded any public works contract with the **City** for a period of five (5) years from the first final determination.

37.4.4(c) Labor Law Section 220, as amended, provides that the **Contractor** or **Subcontractor** found to have violated this Article 37.4 may be directed to make payment of wages or supplements including interest found to be due, and the **Contractor** or **Subcontractor** may be directed to make payment of a further sum as

a civil penalty in an amount not exceeding twenty-five (25%) percent of the total amount found to be due.

37.5 The **Contractor** and its **Subcontractors** shall within ten (10) **Days** after mailing of a Notice of Award or written order, post in prominent and conspicuous places in each and every plant, factory, building, and structure where employees of the **Contractor** and its **Subcontractors** engaged in the performance of this **Contract** are employed, notices furnished by the **City**, in relation to prevailing wages and supplements, minimum wages, and other stipulations contained in Sections 220 and 220-h of the Labor Law, and the **Contractor** and its **Subcontractors** shall continue to keep such notices posted in such prominent and conspicuous places until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services required to be furnished or rendered under this **Contract**.

37.6 The **Contractor** shall strictly comply with all of the provisions of Articles 37.6.1 through 37.6.5, and provide for all workers, laborers or mechanics in its employ, the following:

37.6.1 **Notices Posted At Site:** Post, in a location designated by the **City**, schedules of prevailing wages and supplements for this **Project**, a copy of all re-determinations of such schedules for the **Project**, the Workers' Compensation Law Section 51 notice, all other notices required by **Law** to be posted at the **Site**, the **City** notice that this **Project** is a public works project on which each worker is entitled to receive the prevailing wages and supplements for the occupation at which he or she is working, and all other notices which the **City** directs the **Contractor** to post. The **Contractor** shall provide a surface for such notices which is satisfactory to the **City**. The **Contractor** shall maintain and keep current such notices in a legible manner and shall replace any notice or schedule which is damaged, defaced, illegible or removed for any reason. The **Contractor** shall post such notices before commencing any **Work** on the **Site** and shall maintain such notices until all **Work** on the **Site** is complete; and

37.6.2 **Daily Site Sign-in Sheets:** Maintain daily **Site** sign-in sheets, and require that **Subcontractors** maintain daily **Site** sign-in sheets for its employees, which include blank spaces for an employee's name to be both printed and signed, job title, date started and Social Security number, the time the employee began work and the time the employee left work, until **Final Acceptance** of the supplies, materials, equipment, or **Work**, labor, or services to be furnished or rendered under this **Contract** unless exception is granted by the **Comptroller** upon application by the **Agency**. In the alternative, subject to the approval of the **CCPO**, the **Contractor** and **Subcontractor** may maintain an electronic or biometric sign-in system, which provides the information required by this Article 37.6.2; and

37.6.3 **Individual Employee Information Notices:** Distribute a notice to each worker, laborer or mechanic employed under this **Contract**, in a form provided by the **Agency**, that this **Project** is a public works project on which each worker, laborer or mechanic is entitled to receive the prevailing rate of wages and supplements for the occupation at which he or she is working. If the total cost of the **Work** under this **Contract** is at least two hundred fifty thousand (\$250,000) dollars, such notice shall also include a statement that each worker, laborer or mechanic must be certified prior to performing any **Work** as having successfully completed a course in construction safety and health approved by the United States Department of Labor's Occupational Safety and Health Administration that is at least ten (10) hours in duration. Such notice shall be distributed to each worker before he or she starts performing any **Work** of this **Contract** and with the first paycheck after July first of each year. "Worker, laborer or mechanic" includes employees of the **Contractor** and all **Subcontractors** and all employees of suppliers entering the **Site**. At the time of distribution, the **Contractor** shall have each worker, laborer or mechanic sign a statement, in a form provided by the **Agency**, certifying that the worker has received the notice required by this

Article 37.6.3, which signed statement shall be maintained with the payroll records required by this **Contract**; and

37.6.3(a) The **Contractor** and each **Subcontractor** shall notify each worker, laborer or mechanic employed under this **Contract** in writing of the prevailing rate of wages for their particular job classification. Such notification shall be given to every worker, laborer, and mechanic on their first pay stub and with every pay stub thereafter; and

37.6.4 **Site Laminated Identification Badges:** The **Contractor** shall provide laminated identification badges which include a photograph of the worker's, laborer's or mechanic's face and indicate the worker's, laborer's or mechanic's name, trade, employer's name, and employment starting date (month/day/year). Further, the **Contractor** shall require as a condition of employment on the **Site**, that each and every worker, laborer or mechanic wear the laminated identification badge at all times and that it may be seen by any representative of the **City**. The **Commissioner** may grant a written waiver from the requirement that the laminated identification badge include a photograph if the **Contractor** demonstrates that the identity of an individual wearing a laminated identification badge can be easily verified by another method; and

37.6.5 **Language Other Than English Used On Site:** Provide the **ACCO** notice when three (3) or more employees (worker and/or laborer and/or mechanic) on the **Site**, at any time, speak a language other than English. The **ACCO** will then provide the **Contractor** the notices described in Article 37.6.1 in that language or languages as may be required. The **Contractor** is responsible for all distributions under this Article 37; and

37.6.6 **Provision of Records:** The **Contractor** and **Subcontractor(s)** shall produce within five (5) **Days** on the **Site** of the **Work** and upon a written order of the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, or the **Comptroller**, such records as are required to be kept by this Article 37.6; and

37.6.7 The **Contractor** and **Subcontractor(s)** shall pay employees by check or direct deposit. If this **Contract** is for an amount greater than one million (\$1,000,000) dollars, checks issued by the **Contractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**). For any subcontract for an amount greater than seven hundred fifty thousand (\$750,000) dollars, checks issued by a **Subcontractor** to covered employees shall be generated by a payroll service or automated payroll system (an in-house system may be used if approved by the **Agency**); and

37.6.8 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 37.6.1 through 37.6.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.7 The **Contractor** and its **Subcontractors** shall keep such employment and payroll records as are required by Section 220 of the Labor Law. The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of this Article 37.7 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

37.8 At the time the **Contractor** makes application for each partial payment and for final payment, the **Contractor** shall submit to the **Commissioner** a written payroll certification, in the form provided by this **Contract**, of compliance with the prevailing wage, minimum wage, and other provisions and stipulations required by Labor Law Section 220 and of compliance with the training requirements of

Labor Law Section 220-h set forth in Article 35.2. This certification of compliance shall be a condition precedent to payment and no payment shall be made to the **Contractor** unless and until each such certification shall have been submitted to and received by the **Commissioner**.

37.9 This **Contract** is executed by the **Contractor** with the express warranty and representation that the **Contractor** is not disqualified under the provisions of Section 220 of the Labor Law from the award of the **Contract**.

37.10 Any breach or violation of any of the foregoing shall be deemed a breach or violation of a material provision of this **Contract**, and grounds for cancellation thereof by the **City**.

ARTICLE 38. PAYROLL REPORTS

38.1 The **Contractor** and its **Subcontractor(s)** shall maintain on the **Site** during the performance of the **Work** the original payrolls or transcripts thereof which the **Contractor** and its **Subcontractor(s)** are required to maintain and shall submit such original payrolls or transcripts, subscribed and affirmed by it as true, within thirty (30) **Days** after issuance of its first payroll, and every thirty (30) **Days** thereafter, pursuant to Labor Law Section 220(3-a)(a)(iii). The **Contractor** and **Subcontractor(s)** shall submit such original payrolls or transcripts along with each and every payment requisition. If payment requisitions are not submitted at least once a month, the **Contractor** and its **Subcontractor(s)** shall submit original payrolls and transcripts both along with its payment requisitions and independently of its payment requisitions.

38.2 The **Contractor** shall maintain payrolls or transcripts thereof for six (6) years from the date of completion of the **Work** on this **Contract**. If such payrolls and transcripts are maintained outside of New York City after the completion of the **Work** and their production is required pursuant to this Article 38, the **Contractor** shall produce such records in New York City upon request by the **City**.

38.3 The **Contractor** and **Subcontractor(s)** shall comply with any written order, direction, or request made by the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)**, or the **Comptroller**, to provide to the requesting party any of the following information and/or records within five (5) **Days** of such written order, direction, or request:

38.3.1 Such original payrolls or transcripts thereof subscribed and affirmed by it as true and the statements signed by each worker pursuant to this Chapter VIII; and/or

38.3.2 Attendance sheets for each **Day** on which any employee of the **Contractor** and/or any of the **Subcontractor(s)** performed **Work** on the **Site**, which attendance sheet shall be in a form acceptable to the **Agency** and shall provide information acceptable to the **Agency** to identify each such employee; and/or

38.3.3 Any other information to satisfy the **Engineer**, the **Commissioner**, the **ACCO**, the **Agency EAO**, the **Agency Labor Law Investigator(s)** or the **Comptroller**, that this Chapter VIII and the Labor Law, as to the hours of employment and prevailing rates of wages and/or supplemental benefits, are being observed.

38.4 The failure of the **Contractor** or **Subcontractor(s)** to comply with the provisions of Articles 38.1 and/or 38.2 may result in the **Commissioner** declaring the **Contractor** in default and/or the withholding of payments otherwise due under the **Contract**.

ARTICLE 39. DUST HAZARDS

39.1 Should a harmful dust hazard be created in performing the **Work** of this **Contract**, for the elimination of which appliances or methods have been approved by the Board of Standards and Appeals of the City of New York, such appliances and methods shall be installed, maintained, and effectively operated during the continuance of such harmful dust hazard. Failure to comply with this provision after notice shall make this **Contract** voidable at the sole discretion of the **City**.

CHAPTER IX PARTIAL AND FINAL PAYMENTS

ARTICLE 40. CONTRACT PRICE

40.1 The **City** shall pay, and the **Contractor** agrees to accept, in full consideration for the **Contractor's** performance of the **Work** subject to the terms and conditions hereof, the lump sum price or unit prices for which this **Contract** was awarded, plus the amount required to be paid for any **Extra Work** ordered by the **Commissioner** under Article 25, less credit for any **Work** omitted pursuant to Article 29.

ARTICLE 41. BID BREAKDOWN ON LUMP SUM

41.1 Within fifteen (15) **Days** after the commencement date specified in the **Notice to Proceed** or **Order to Work**, unless otherwise directed by the **Resident Engineer**, the **Contractor** shall submit to the **Resident Engineer** a breakdown of its bid price, or of lump sums bid for items of the **Contract**, showing the various operations to be performed under the **Contract**, as directed in the progress schedule required under Article 9, and the value of each of such operations, the total of such items to equal the lump sum price bid. Said breakdown must be approved in writing by the **Resident Engineer**.

41.2 No partial payment will be approved until the **Contractor** submits a bid breakdown that is acceptable to the **Resident Engineer**.

41.3 The **Contractor** shall also submit such other information relating to the bid breakdown as directed by the **Resident Engineer**. Thereafter, the breakdown may be used only for checking the **Contractor's** applications for partial payments hereunder, but shall not be binding upon the **City**, the **Commissioner**, or the **Engineer** for any purpose whatsoever.

ARTICLE 42. PARTIAL PAYMENTS

42.1 From time to time as the **Work** progresses satisfactorily, but not more often than once each calendar month (except where the **Commissioner** approves in writing the submission of invoices on a more frequent basis and for invoices relating to **Work** performed pursuant to a change order), the **Contractor** may submit to the **Engineer** a requisition for a partial payment in the prescribed form, which shall contain an estimate of the quantity and the fair value of the **Work** done during the payment period.

42.2 Partial payments may be made for materials, fixtures, and equipment in advance of their actual incorporation in the **Work**, as the **Commissioner** may approve, and upon the terms and conditions set forth in the General Conditions.

42.3 The **Contractor** shall also submit to the **Commissioner** in connection with every application for partial payment a verified statement in the form prescribed by the **Comptroller** setting forth the information required under Labor Law Section 220-a.

42.4 Within thirty (30) **Days** after receipt of a satisfactory payment application, and within sixty (60) **Days** after receipt of a satisfactory payment application in relation to **Work** performed pursuant to a change order, the **Engineer** will prepare and certify, and the **Commissioner** will approve, a voucher for a partial payment in the amount of such approved estimate, less any and all deductions authorized to be made by the **Commissioner** under the terms of this **Contract** or by **Law**.

ARTICLE 43. PROMPT PAYMENT

43.1 The Prompt Payment provisions of the **PPB** Rules in effect at the time of the bid will be applicable to payments made under this **Contract**. The provisions require the payment to the **Contractor** of interest on payments made after the required payment date, except as set forth in the **PPB** Rules.

43.2 The **Contractor** shall submit a proper invoice to receive payment, except where the **Contract** provides that the **Contractor** will be paid at predetermined intervals without having to submit an invoice for each scheduled payment.

43.3 Determination of interest due will be made in accordance with the **PPB** Rules.

43.4 If the **Contractor** is paid interest, the proportionate share(s) of that interest shall be forwarded by the **Contractor** to its **Subcontractor(s)**.

43.5 The **Contractor** shall pay each **Subcontractor** or **Materialman** not later than seven (7) **Days** after receipt of payment out of amounts paid to the **Contractor** by the **City** for **Work** performed by the **Subcontractor** or **Materialman** under this **Contract**.

43.5.1 If **Contractor** fails to make any payment to any **Subcontractor** or **Materialman** within seven (7) **Days** after receipt of payment by the **City** pursuant to this Article 43.5, then the **Contractor** shall pay interest on amounts due to such **Subcontractor** or **Materialman** at the rate of interest in effect on the date such payment is made by the **Contractor** computed in accordance with Section 756-b (1)(b) of the New York General Business Law. Accrual of interest shall commence on the **Day** immediately following the expiration of the seventh **Day** following receipt of payment by the **Contractor** from the **City** and shall end on the date on which payment is made.

43.6 The **Contractor** shall include in each of its subcontracts a provision requiring each **Subcontractor** to make payment to each of its **Subcontractors** or **Materialmen** for **Work** performed under this **Contract** in the same manner and within the same time period set forth above.

ARTICLE 44. SUBSTANTIAL COMPLETION PAYMENT

44.1 The **Contractor** shall submit with the **Substantial Completion** requisition:

44.1.1 A final verified statement of any pending Article 27 disputes in accordance with the **PPB** Rules and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) setting forth with respect to each

such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay.

44.1.1(a) With respect to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City Corporation Counsel** shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 44.1.1(a) is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor** upon acceptance of the **Substantial Completion** payment pursuant to this Article 44, will have waived any such claims.

44.1.2 **A Final Approved Punch List.**

44.1.3 Where required, a request for an extension of time to achieve **Substantial Completion** or final extension of time.

44.2 The **Commissioner** shall issue a voucher calling for payment of any part or all of the balance due for **Work** performed under the **Contract**, including monies retained under Article 21, less any and all deductions authorized to be made by the **Commissioner**, under this **Contract** or by **Law**, and less twice the amount the **Commissioner** considers necessary to ensure the completion of the balance of the **Work** by the **Contractor**. Such a payment shall be considered a partial and not a final payment. No **Substantial Completion** payment shall be made under this Article 44 where the **Contractor** failed to complete the **Work** within the time fixed for such completion in the Schedule A of the General Conditions, or within the time to which completion may have been extended, until an extension or extensions of time for the completion of **Work** have been acted upon pursuant to Article 13.

44.3 No further partial payments shall be made to the **Contractor** after **Substantial Completion**, except the **Substantial Completion** payment and payment pursuant to any **Contractor's** requisition that were properly filed with the **Commissioner** prior to the date of **Substantial Completion**; however, the **Commissioner** may grant a waiver for further partial payments after the date of **Substantial Completion** to permit payments for change order **Work** and/or release of retainage and deposits pursuant to Articles 21 and 24. Such waiver shall be in writing.

44.4 The **Contractor** acknowledges that nothing contained in this Article 44 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 45. FINAL PAYMENT

45.1 After completion and **Final Acceptance** of the **Work**, the **Contractor** shall submit all required certificates and documents, together with a requisition for the balance claimed to be due under the **Contract**, less the amount authorized to be retained for maintenance under Article 24. Such submission shall be within 90 days of the date of the **Commissioner's** written determination of **Final Acceptance**, or within such additional time as may be granted by the **Commissioner** in writing. If the **Contractor** fails to submit all required certificates and documents within the time allowed, no payment of the balance claimed shall be made to the **Contractor** and the **Contractor** shall be deemed to have forfeited its right to

payment of any balance claimed. A verified statement similar to that required in connection with applications for partial payments shall also be submitted to the **Commissioner**.

45.2 Amended Verified Statement of Claims: The **Contractor** shall also submit with the final requisition any amendments to the final verified statement of any pending dispute resolution procedures in accordance with the **PPB** Rules and this **Contract** and any and all alleged claims against the **City**, in any way connected with or arising out of this **Contract** (including those as to which details may have been furnished pursuant to Articles 11, 27, 28, and 30) that have occurred subsequent to **Substantial Completion**, setting forth with respect to each such claim the total amount thereof, the various items of labor and materials included therein, and the alleged value of each such item; and if the alleged claim be one for delay, the alleged cause of each such delay, the period or periods of time, giving the dates when the **Contractor** claims the performance of the **Work** or a particular part thereof was delayed, and an itemized statement and breakdown of the amount claimed for each such delay. With reference to each such claim, the **Commissioner**, the **Comptroller** and, in the event of litigation, the **City** Corporation Counsel shall have the same right to inspect, and to make extracts or copies of, the **Contractor's** books, vouchers, records, etc., as is referred to in Articles 11, 27, 28, and 30. Nothing contained in this Article 45.2, is intended to or shall relieve the **Contractor** from the obligation of complying strictly with Articles 11, 27, 28, and 30. The **Contractor** is warned that unless such claims are completely set forth as herein required, the **Contractor**, upon acceptance of the Final Payment pursuant to Article 46, will have waived any such claims.

45.3 Preparation of Final Voucher: Upon determining the balance due hereunder other than on account of claims, the **Engineer** will prepare and certify, for the **Commissioner's** approval, a voucher for final payment in that amount less any and all deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**. In the case of a lump sum **Contract**, the **Commissioner** shall certify the voucher for final payment within thirty (30) **Days** from the date of completion and acceptance of the **Work**, provided all requests for extensions of time have been acted upon.

45.3.1 All prior certificates and vouchers upon which partial payments were made, being merely estimates made to enable the **Contractor** to prosecute the **Work** more advantageously, shall be subject to correction in the final voucher, and the certification of the **Engineer** thereon and the approval of the **Commissioner** thereof, shall be conditions precedent to the right of the **Contractor** to receive any money hereunder. Such final voucher shall be binding and conclusive upon the **Contractor**.

45.3.2 Payment pursuant to such final voucher, less any deductions authorized to be made by the **Commissioner** under this **Contract** or by **Law**, shall constitute the final payment, and shall be made by the **Comptroller** within thirty (30) **Days** after the filing of such voucher in his/her office.

45.4 The **Contractor** acknowledges that nothing contained in this Article 45 is intended to or shall in any way diminish the force and effect of Article 13.

ARTICLE 46. ACCEPTANCE OF FINAL PAYMENT

46.1 The acceptance by the **Contractor**, or by anyone claiming by or through it, of the final payment, whether such payment be made pursuant to any judgment of any court, or otherwise, shall constitute and operate as a release of the **City** from any and all claims of and liability to the **Contractor** for anything heretofore done or furnished for the **Contractor** relating to or arising out of this **Contract** and the **Work** done hereunder, and for any prior act, neglect or default on the part of the **City** or any of its officials, agents or employees, excepting only a claim against the **City** for the amounts deducted or retained in accordance with the terms and provisions of this **Contract** or by **Law**, and excepting any

claims, not otherwise waived, or any pending dispute resolution procedures which are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45.

46.2 The **Contractor** is warned that the execution by it of a release, in connection with the acceptance of the final payment, containing language purporting to reserve claims other than those herein specifically excepted from the operation of this Article 46, or those for amounts deducted by the **Commissioner** from the final requisition or from the final payment as certified by the **Engineer** and approved by the **Commissioner**, shall not be effective to reserve such claims, anything stated to the **Contractor** orally or in writing by any official, agent or employee of the **City** to the contrary notwithstanding.

46.3 Should the **Contractor** refuse to accept the final payment as tendered by the **Comptroller**, it shall constitute a waiver of any right to interest thereon.

46.4 The **Contractor**, however, shall not be barred by this Article 46 from commencing an action for breach of **Contract** to the extent permitted by **Law** and by the terms of the **Contract** for any claims that are contained in the verified statement filed with the **Contractor's** substantial and final requisitions pursuant to Articles 44 and 45 or that arose after submission of the final payment requisition, provided that a detailed and verified statement of claim is served upon the contracting **Agency** and **Comptroller** not later than forty (40) **Days** after the making of such final payment by electronic funds transfer (EFT) or the mailing of such final payment. The statement shall specify the items upon which the claim will be based and any such claim shall be limited to such items.

ARTICLE 47. APPROVAL BY PUBLIC DESIGN COMMISSION

47.1 All works of art, including paintings, mural decorations, stained glass, statues, bas-reliefs, and other sculptures, monuments, fountains, arches, and other structures of a permanent character intended for ornament or commemoration, and every design of the same to be used in the performance of this **Contract**, and the design of all bridges, approaches, buildings, gates, fences, lamps, or structures to be erected, pursuant to the terms of this **Contract**, shall be submitted to the Art Commission, d/b/a the Public Design Commission of the City of New York, and shall be approved by the Public Design Commission prior to the erection or placing in position of the same. The final payment shall not become due or payable under this **Contract** unless and until the Public Design Commission shall certify that the design for the **Work** herein contracted for has been approved by the said Public Design Commission, and that the same has been executed in substantial accordance with the design so approved, pursuant to the provisions of Chapter 37, Section 854 of the **City Charter**, as amended.

CHAPTER X CONTRACTOR'S DEFAULT

ARTICLE 48. COMMISSIONER'S RIGHT TO DECLARE CONTRACTOR IN DEFAULT

48.1 In addition to those instances specifically referred to in other Articles herein, the **Commissioner** shall have the right to declare the **Contractor** in default of this **Contract** if:

48.1.1 The **Contractor** fails to commence **Work** when notified to do so by the **Commissioner**; or
if

48.1.2 The **Contractor** shall abandon the **Work**; or if

48.1.3 The **Contractor** shall refuse to proceed with the **Work** when and as directed by the **Commissioner**; or if

48.1.4 The **Contractor** shall, without just cause, reduce its working force to a number which, if maintained, would be insufficient, in the opinion of the **Commissioner**, to complete the **Work** in accordance with the progress schedule; or if

48.1.5 The **Contractor** shall fail or refuse to increase sufficiently such working force when ordered to do so by the **Commissioner**; or if

48.1.6 The **Contractor** shall sublet, assign, transfer, convert or otherwise dispose of this **Contract** other than as herein specified; or sell or assign a majority interest in the **Contractor**; or if

48.1.7 The **Contractor** fails to secure and maintain all required insurance; or if

48.1.8 A receiver or receivers are appointed to take charge of the **Contractor's** property or affairs; or if

48.1.9 The **Commissioner** shall be of the opinion that the **Contractor** is or has been unnecessarily or unreasonably or willfully delaying the performance and completion of the **Work**, or the award of necessary subcontracts, or the placing of necessary material and equipment orders; or if

48.1.10 The **Commissioner** shall be of the opinion that the **Contractor** is or has been willfully or in bad faith violating any of the provisions of this **Contract**; or if

48.1.11 The **Commissioner** shall be of the opinion that the **Work** cannot be completed within the time herein provided therefor or within the time to which such completion may have been extended; provided, however, that the impossibility of timely completion is, in the **Commissioner's** opinion, attributable to conditions within the **Contractor's** control; or if

48.1.12 The **Work** is not completed within the time herein provided therefor or within the time to which the **Contractor** may be entitled to have such completion extended; or if

48.1.13 Any statement or representation of the **Contractor** in the **Contract** or in any document submitted by the **Contractor** with respect to the **Work**, the **Project**, or the **Contract** (or for purposes of securing the **Contract**) was untrue or incorrect when made; or if

48.1.14 The **Contractor** or any of its officers, directors, partners, five (5%) percent shareholders, principals, or other persons substantially involved in its activities, commits any of the acts or omissions specified as the grounds for debarment in the **PPB** Rules.

48.2 Before the **Commissioner** shall exercise his/her right to declare the **Contractor** in default, the **Commissioner** shall give the **Contractor** an opportunity to be heard, upon not less than two (2) **Days** notice.

ARTICLE 49. EXERCISE OF THE RIGHT TO DECLARE DEFAULT

49.1 The right to declare the **Contractor** in default for any of the grounds specified or referred to in Article 48 shall be exercised by sending the **Contractor** a notice, signed by the **Commissioner**, setting forth the ground or grounds upon which such default is declared (hereinafter referred to as a "Notice of Default").

49.2 The **Commissioner's** determination that the **Contractor** is in default shall be conclusive, final, and binding on the parties and such a finding shall preclude the **Contractor** from commencing a plenary action for any damages relating to the **Contract**. If the **Contractor** protests the determination of the **Commissioner**, the **Contractor** may commence an action in a court of competent jurisdiction of the State of New York under Article 78 of the New York Civil Practice Law and Rules.

ARTICLE 50. QUITTING THE SITE

50.1 Upon receipt of such notice the **Contractor** shall immediately discontinue all further operations under this **Contract** and shall immediately quit the **Site**, leaving untouched all plant, materials, equipment, tools, and supplies then on the **Site**.

ARTICLE 51. COMPLETION OF THE WORK

51.1 The **Commissioner**, after declaring the **Contractor** in default, may then have the **Work** completed by such means and in such manner, by contract with or without public letting, or otherwise, as he/she may deem advisable, utilizing for such purpose such of the **Contractor's** plant, materials, equipment, tools, and supplies remaining on the **Site**, and also such **Subcontractors**, as he/she may deem advisable.

51.2 After such completion, the **Commissioner** shall make a certificate stating the expense incurred in such completion, which shall include the cost of re-letting and also the total amount of liquidated damages (at the rate provided for in the **Contract**) from the date when the **Work** should have been completed by the **Contractor** in accordance with the terms hereof to the date of actual completion of the **Work**. Such certificate shall be binding and conclusive upon the **Contractor**, its sureties, and any person claiming under the **Contractor**, as to the amount thereof.

51.3 The expense of such completion, including any and all related and incidental costs, as so certified by the **Commissioner**, and any liquidated damages assessed against the **Contractor**, shall be charged against and deducted out of monies which are earned by the **Contractor** prior to the date of default. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

ARTICLE 52. PARTIAL DEFAULT

52.1 In case the **Commissioner** shall declare the **Contractor** in default as to a part of the **Work** only, the **Contractor** shall discontinue such part, shall continue performing the remainder of the **Work** in strict conformity with the terms of this **Contract**, and shall in no way hinder or interfere with any **Other**

Contractor(s) or persons whom the **Commissioner** may engage to complete the **Work** as to which the **Contractor** was declared in default.

52.2 The provisions of this Chapter relating to declaring the **Contractor** in default as to the entire **Work** shall be equally applicable to a declaration of partial default, except that the **Commissioner** shall be entitled to utilize for completion of the part of the **Work** as to which the **Contractor** was declared in default only such plant, materials, equipment, tools, and supplies as had been previously used by the **Contractor** on such part.

ARTICLE 53. PERFORMANCE OF UNCOMPLETED WORK

53.1 In completing the whole or any part of the **Work** under the provisions of this Chapter X, the **Commissioner** shall have the power to depart from or change or vary the terms and provisions of this **Contract**, provided, however, that such departure, change or variation is made for the purpose of reducing the time or expense of such completion. Such departure, change or variation, even to the extent of accepting a lesser or different performance, shall not affect the conclusiveness of the **Commissioner's** certificate of the cost of completion referred to in Article 51, nor shall it constitute a defense to an action to recover the amount by which such certificate exceeds the amount which would have been payable to the **Contractor** hereunder but for its default.

ARTICLE 54. OTHER REMEDIES

54.1 In addition to the right to declare the **Contractor** in default pursuant to this Chapter X, the **Commissioner** shall have the absolute right, in his/her sole discretion and without a hearing, to complete or cause to be completed in the same manner as described in Articles 51 and 53, any or all unsatisfactory or uncompleted punch list **Work** that remains after the completion date specified in the **Final Approved Punch List**. A written notice of the exercise of this right shall be sent to the **Contractor** who shall immediately quit the **Site** in accordance with the provisions of Article 50.

54.2 The expense of completion permitted under Article 54.1, including any and all related and incidental costs, as so certified by the **Commissioner**, shall be charged against and deducted out of monies which have been earned by the **Contractor** prior to the date of the exercise of the right set forth in Article 54.1; the balance of such monies, if any, subject to the other provisions of this **Contract**, to be paid to the **Contractor** without interest after such completion. Should the expense of such completion, as certified by the **Commissioner**, exceed the total sum which would have been payable under the **Contract** if it had been completed by the **Contractor**, any excess shall be paid by the **Contractor**.

54.3 The previous provisions of this Chapter X shall be in addition to any and all other remedies available under **Law** or in equity.

54.4 The exercise by the **City** of any remedy set forth herein shall not be deemed a waiver by the **City** of any other legal or equitable remedy contained in this **Contract** or provided under **Law**.

**CHAPTER XI
MISCELLANEOUS PROVISIONS**

ARTICLE 55. CONTRACTOR'S WARRANTIES

55.1 In consideration of, and to induce, the award of this **Contract** to the **Contractor**, the **Contractor** represents and warrants:

55.1.1 That it is financially solvent, sufficiently experienced and competent to perform the **Work**; and

55.1.2 That the facts stated in its bid and the information given by it pursuant to the Information for Bidders is true and correct in all respects; and

55.1.3 That it has read and complied with all requirements set forth in the **Contract**.

ARTICLE 56. CLAIMS AND ACTIONS THEREON

56.1 Any claim, that is not subject to dispute resolution under the **PPB** Rules or this **Contract**, against the **City** for damages for breach of **Contract** shall not be made or asserted in any action, unless the **Contractor** shall have strictly complied with all requirements relating to the giving of notice and of information with respect to such claims, as herein before provided.

56.2 Nor shall any action be instituted or maintained on any such claims unless such action is commenced within six (6) months after **Substantial Completion**; except that:

56.2.1 Any claims arising out of events occurring after **Substantial Completion** and before **Final Acceptance** of the **Work** shall be asserted within six (6) months of **Final Acceptance** of the **Work**;

56.2.2 Any claims for monies deducted, retained or withheld under the provisions of this **Contract** shall be asserted within six (6) months after the date when such monies otherwise become due and payable hereunder; and

56.2.3 If the **Commissioner** exercises his/her right to terminate the **Contract** pursuant to Article 64, any such action shall be commenced within six (6) months of the date the **Commissioner** exercises said right.

ARTICLE 57. INFRINGEMENT

57.1 The **Contractor** shall be solely responsible for and shall defend, indemnify, and hold the **City** harmless from any and all claims (even if the allegations of the lawsuit are without merit) and judgments for damages and from costs and expenses to which the **City** may be subject to or which it may suffer or incur allegedly arising out of or in connection with any infringement by the **Contractor** of any copyright, trade secrets, trademark or patent rights or any other property or personal right of any third party by the **Contractor** and/or its **Subcontractors** in the performance or completion of the **Work**. Insofar as the facts or **Law** relating to any claim would preclude the **City** from being completely indemnified by the **Contractor**, the **City** shall be partially indemnified by the **Contractor** to the fullest extent permitted by **Law**.

ARTICLE 58. NO CLAIM AGAINST OFFICIALS, AGENTS OR EMPLOYEES

58.1 No claim whatsoever shall be made by the **Contractor** against any official, agent or employee of the **City** for, or on account of, anything done or omitted to be done in connection with this **Contract**.

ARTICLE 59. SERVICE OF NOTICES

59.1 The **Contractor** hereby designates the business address, fax number, and email address specified in its bid, as the place where all notices, directions or other communications to the **Contractor** may be delivered, or to which they may be mailed. Any notice, direction, or communication from either party to the other shall be in writing and shall be deemed to have been given when (i) delivered personally; (ii) sent by certified mail, return receipt requested; (iii) delivered by overnight or same day courier service in a properly addressed envelope with confirmation; or (iv) sent by fax or email and, unless receipt of the fax or e-mail is acknowledged by the recipient by fax or e-mail, deposited in a post office box regularly maintained by the United States Postal Service in a properly addressed, postage pre-paid envelope.

59.2 **Contractor's** notice address, email address, or fax number may be changed at any time by an instrument in writing, executed and acknowledged by the **Contractor**, and delivered to the **Commissioner**.

59.3 Nothing herein contained shall, however, be deemed to preclude or render inoperative the service of any notice, direction or other communication upon the **Contractor** personally, or, if the **Contractor** is a corporation, upon any officer thereof.

ARTICLE 60. UNLAWFUL PROVISIONS DEEMED STRICKEN FROM CONTRACT

60.1 If this **Contract** contains any unlawful provision not an essential part of the **Contract** and which shall not appear to have been a controlling or material inducement to the making thereof, the same shall be deemed of no effect and shall, upon notice by either party, be deemed stricken from the **Contract** without affecting the binding force of the remainder.

ARTICLE 61. ALL LEGAL PROVISIONS DEEMED INCLUDED

61.1 It is the intent and understanding of the parties to this **Contract** that each and every provision of **Law** required to be inserted in this **Contract** shall be and is inserted herein. Furthermore, it is hereby stipulated that every such provision is to be deemed to be inserted herein, and if, through mistake or otherwise, any such provision is not inserted, or is not inserted in correct form, then this **Contract** shall forthwith upon the application of either party be amended by such insertion so as to comply strictly with the **Law** and without prejudice to the rights of either party hereunder.

ARTICLE 62. TAX EXEMPTION

62.1 The **City** is exempt from payment of Federal, State, and local taxes, including sales and compensating use taxes of the State of New York and its cities and counties on all tangible personal property sold to the **City** pursuant to the provisions of this **Contract**. These taxes are not to be included in bids. However, this exemption does not apply to tools, machinery, equipment or other property leased by or to the **Contractor**, **Subcontractor** or **Materialman** or to tangible personal property which, even

though it is consumed, is not incorporated into the completed **Work** (consumable supplies) and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**. The **Contractor** and its **Subcontractors** and **Materialmen** shall be responsible for and pay any and all applicable taxes, including sales and compensating use taxes, on such leased tools, machinery, equipment or other property and upon all such consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**.

62.2 The **Contractor** agrees to sell and the **City** agrees to purchase all tangible personal property, other than consumable supplies and other tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work**, that is required, necessary or proper for or incidental to the construction of the **Project** covered by this **Contract**. The sum paid under this **Contract** for such tangible personal property shall be in full payment and consideration for the sale of such tangible personal property.

62.2.1 The **Contractor** agrees to construct the **Project** and to perform all **Work**, labor and services rendered, necessary, proper or incidental thereto for the sum shown in the bid for the performance of such **Work**, labor, and services, and the sum so paid pursuant to this **Contract** for such **Work**, labor, and services, shall be in full consideration for the performance by the **Contractor** of all its duties and obligations under this **Contract** in connection with said **Work**, labor, and services.

62.3 20 NYCRR Section 541.3(d) provides that a **Contractor's** purchases of tangible personal property that is either incorporated into real property owned by a governmental entity or purchased for and sold to a governmental entity are exempt from sales and use tax. The **City** shall not pay sales tax for any such tangible personal property that it purchases from the **Contractor** pursuant to the **Contract**. With respect to such tangible personal property, the **Contractor**, at the request of the **City**, shall furnish to the **City** such bills of sale and other instruments as may be required by the **City**, properly executed, acknowledged and delivered assuring to the **City** title to such tangible personal property, free of liens and/or encumbrances, and the **Contractor** shall mark or otherwise identify all such tangible personal property as the property of the **City**.

62.4 Title to all tangible personal property to be sold by the **Contractor** to the **City** pursuant to the provisions of the **Contract** shall immediately vest in and become the sole property of the **City** upon delivery of such tangible personal property to the **Site**. Notwithstanding such transfer of title, the **Contractor** shall have the full and continuing responsibility to install such tangible personal property in accordance with the provisions of this **Contract**, protect it, maintain it in a proper condition and forthwith repair, replace and make good any damage thereto, theft or disappearance thereof, and furnish additional tangible personal property in place of any that may be lost, stolen or rendered unusable, without cost to the **City**, until such time as the **Work** covered by the **Contract** is fully accepted by the **City**. Such transfer of title shall in no way affect any of the **Contractor's** obligations hereunder. In the event that, after title has passed to the **City**, any of the tangible personal property is rejected as being defective or otherwise unsatisfactory, title to all such tangible personal property shall be deemed to have been transferred back to the **Contractor**.

62.5 The purchase by **Subcontractors** or **Materialmen** of tangible personal property to be sold hereunder shall be a purchase or procurement for resale to the **Contractor** (either directly or through other **Subcontractors**) and therefore not subject to the aforesaid sales and compensating use taxes, provided that the subcontracts and purchase agreements provide for the resale of such tangible personal property and that such subcontracts and purchase agreements are in a form similar to this **Contract** with respect to the separation of the sale of consumable supplies and tangible personal property that the **Contractor** is required to remove from the **Site** during or upon completion of the **Work** from the **Work** and labor, services, and any other matters to be provided, and provided further that the subcontracts and

purchase agreements provide separate prices for tangible personal property and all other services and matters. Such separation shall actually be followed in practice, including the separation of payments for tangible personal property from the payments for other **Work** and labor and other things to be provided.

62.6 The **Contractor** and its **Subcontractors** and **Materialmen** shall furnish a **Contractor** Exempt Purchase Certificate to all persons, firms or corporations from which they purchase tangible personal property for the performance of the **Work** covered by this **Contract**.

62.7 In the event any of the provisions of this Article 62 shall be deemed to be in conflict with any other provisions of this **Contract** or create any ambiguity, then the provisions of this Article 62 shall control.

ARTICLE 63. INVESTIGATION(S) CLAUSE

63.1 The parties to this **Contract** agree to cooperate fully and faithfully with any investigation, audit or inquiry conducted by a United States, a State of New York (State) or a **City** governmental agency or authority that is empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath, or conducted by the Inspector General of a governmental agency that is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit or license that is the subject of the investigation, audit or inquiry.

63.2 If any person who has been advised that his/her statement, and any information from such statement, will not be used against him/her in any subsequent criminal proceeding refuses to testify before a grand jury or other governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to examine witnesses under oath concerning the award of or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision or public authority thereof, or the Port Authority of New York and New Jersey, or any local development corporation within the **City**, or any public benefit corporation organized under the **Laws** of the State of New York, or;

63.3 If any person refuses to testify for a reason other than the assertion of his/her privilege against self incrimination in an investigation, audit or inquiry conducted by a **City** or State governmental agency or authority empowered directly or by designation to compel the attendance of witnesses and to take testimony under oath, or by the Inspector General of the governmental agency that is a party in interest in, and is seeking testimony concerning the award of, or performance under any transaction, agreement, lease, permit, contract, or license entered into with the **City**, the State, or any political subdivision thereof or any local development corporation within the **City**, then;

63.4 The **Commissioner** whose **Agency** is a party in interest to the transaction, submitted bid, submitted proposal, contract, lease, permit, or license shall convene a hearing, upon not less than five (5) **Days'** written notice to the parties involved to determine if any penalties should attach for the failure of a person to testify.

63.5 If any non-governmental party to the hearing requests an adjournment, the **Commissioner** who convened the hearing may, upon granting the adjournment, suspend any contract, lease, permit, or license, pending the final determination pursuant to Article 63.7 without the **City** incurring any penalty or damages for delay or otherwise.

63.6 The penalties which may attach after a final determination by the **Commissioner** may include but shall not exceed:

63.6.1 The disqualification for a period not to exceed five (5) years from the date of an adverse determination for any person, or any entity of which such person was a member at the time the testimony was sought, from submitting bids for, or transacting business with, or entering into or obtaining any contract, lease, permit or license with or from the **City**; and/or

63.6.2 The cancellation or termination of any and all such existing **City** contracts, leases, permits or licenses that the refusal to testify concerns and that have not been assigned as permitted under this **Contract**, nor the proceeds of which pledged, to an unaffiliated and unrelated institutional lender for fair value prior to the issuance of the notice scheduling the hearing, without the **City** incurring any penalty or damages on account of such cancellation or termination; monies lawfully due for goods delivered, work done, rentals, or fees accrued prior to the cancellation or termination shall be paid by the **City**.

63.7 The **Commissioner** shall consider and address in reaching his/her determination and in assessing an appropriate penalty the factors in Articles 63.7.1 and 63.7.2. The **Commissioner** may also consider, if relevant and appropriate, the criteria established in Articles 63.7.3 and 63.7.4, in addition to any other information which may be relevant and appropriate:

63.7.1 The party's good faith endeavors or lack thereof to cooperate fully and faithfully with any governmental investigation or audit, including but not limited to the discipline, discharge, or disassociation of any person failing to testify, the production of accurate and complete books and records, and the forthcoming testimony of all other members, agents, assignees or fiduciaries whose testimony is sought.

63.7.2 The relationship of the person who refused to testify to any entity that is a party to the hearing, including but not limited to, whether the person whose testimony is sought has an ownership interest in the entity and/or the degree of authority and responsibility the person has within the entity.

63.7.3 The nexus of the testimony sought to the subject entity and its contracts, leases, permits or licenses with the **City**.

63.7.4 The effect a penalty may have on an unaffiliated and unrelated party or entity that has a significant interest in an entity subject to penalties under Article 63.6, provided that the party or entity has given actual notice to the **Commissioner** upon the acquisition of the interest, or at the hearing called for in Article 63.4, gives notice and proves that such interest was previously acquired. Under either circumstance the party or entity shall present evidence at the hearing demonstrating the potential adverse impact a penalty will have on such person or entity.

63.8 Definitions:

63.8.1 The term "license" or "permit" as used in this Article 63 shall be defined as a license, permit, franchise or concession not granted as a matter of right.

63.8.2 The term "person" as used in this Article 63 shall be defined as any natural person doing business alone or associated with another person or entity as a partner, director, officer, principal or employee.

63.8.3 The term "entity" as used in this Article 63 shall be defined as any firm, partnership, corporation, association, joint venture, or person that receives monies, benefits, licenses, leases, or permits from or through the **City** or otherwise transacts business with the **City**.

63.8.4 The term "member" as used in this Article 63 shall be defined as any person associated with another person or entity as a partner, director, officer, principal or employee.

63.9 In addition to and notwithstanding any other provision of this **Contract**, the **Commissioner** may in his/her sole discretion terminate this **Contract** upon not less than three (3) **Days**' written notice in the event the **Contractor** fails to promptly report in writing to the **Commissioner** of the Department of Investigations ("DOI") of the **City** any solicitation of money, goods, requests for future employment or other benefit or thing of value, by or on behalf of any employee of the **City** or other person, firm, corporation or entity for any purpose which may be related to the procurement or obtaining of this **Contract** by the **Contractor**, or affecting the performance of this **Contract**.

ARTICLE 64. TERMINATION BY THE CITY

64.1 In addition to termination pursuant to any other article of this **Contract**, the **Commissioner** may, at any time, terminate this **Contract** by written notice to the **Contractor**. In the event of termination, the **Contractor** shall, upon receipt of such notice, unless otherwise directed by the **Commissioner**:

64.1.1 Stop **Work** on the date specified in the notice;

64.1.2 Take such action as may be necessary for the protection and preservation of the **City's** materials and property;

64.1.3 Cancel all cancelable orders for material and equipment;

64.1.4 Assign to the **City** and deliver to the **Site** or another location designated by the **Commissioner**, any non-cancelable orders for material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract** and not incorporated in the **Work**;

64.1.5 Take no action which will increase the amounts payable by the **City** under this **Contract**.

64.2 In the event of termination by the **City** pursuant to this Article 64, payment to the **Contractor** shall be in accordance with Articles 64.2.1, 64.2.2 or 64.2.3, to the extent that each respective article applies.

64.2.1 Lump Sum Contracts or Items: On all lump sum **Contracts**, or on lump sum items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.1(a) and 64.2.1(b), less all payments previously made pursuant to this **Contract**. On lump sum **Contracts** only, the **City** will also pay the **Contractor** an additional sum as provided in Article 64.2.1(c).

64.2.1(a) For **Work** completed prior to the notice of termination, the **Contractor** shall be paid a pro rata portion of the lump sum bid amount, plus approved change orders, based upon the percent completion of the **Work**, as determined by the **Commissioner**. For the purpose of determining the pro rata portion of the lump sum bid amount to which the **Contractor** is entitled, the bid breakdown submitted in accordance with Article 41 shall be considered, but shall not be dispositive. The **Commissioner's** determination hereunder shall be final, binding, and conclusive.

64.2.1(b) For non-cancelable material and equipment that is not capable of use except in the performance of this **Contract** and has been specifically fabricated for the sole purpose of this **Contract**, but not yet incorporated in the **Work**, the **Contractor** shall be paid the lesser of the following, less salvage value:

64.2.1(b)(i) The Direct Cost, as defined in Article 64.2.4; or

64.2.1(b)(ii) The fair and reasonable value, if less than Direct Cost, of such material and equipment, plus necessary and reasonable delivery costs.

64.2.1(b)(iii) In addition, the **Contractor** shall be paid five (5%) percent of the amount described in Article 64.2.1(b)(i) or Article 64.2.1(b)(ii), whichever applies.

64.2.1(c) Except as otherwise provided in Article 64.2.1(d), on all lump sum **Contracts**, the **Contractor** shall be paid the percentage indicated below applied to the difference between the total lump sum bid amount and the total of all payments made prior to the notice of termination plus all payments allowed pursuant to Articles 64.2.1(a) and 64.2.1(b):

64.2.1(c)(i) Five (5%) percent of the first five million (\$5,000,000) dollars; and

64.2.1(c)(ii) Three (3%) percent of any amount between five million (\$5,000,000) dollars and fifteen million (\$15,000,000) dollars; plus

64.2.1(c)(iii) One (1%) percent of any amount over fifteen million (\$15,000,000) dollars.

64.2.1(d) In the event the **City** terminates a lump sum **Contract** pursuant to this Article 64 within ninety (90) **Days** after registration of the **Contract** with the **Comptroller**, the **Contractor** shall be paid one (1%) percent of the difference between the lump sum bid amount and the total of all payments made pursuant to this Article 64.2.

64.2.2 Unit Price Contracts or Items: On all unit price **Contracts**, or on unit price items in a **Contract**, the **City** will pay the **Contractor** the sum of the amounts described in Articles 64.2.2(a) and 64.2.2(b), less all payments previously made pursuant to this **Contract**:

64.2.2(a) For all completed units, the unit price stated in the **Contract**, and

64.2.2(b) For units that have been ordered but are only partially completed, the **Contractor** will be paid:

64.2.2(b)(i) A pro rata portion of the unit price stated in the **Contract** based upon the percent completion of the unit and

64.2.2(b)(ii) For non-cancelable material and equipment, payment will be made pursuant to Article 64.2.1(b).

64.2.3 Time and Materials Contracts or Items Based on Time and Material Records: On all **Contracts** or items in a **Contract** where payment for the **Work** is based on time and

material records, the **Contractor** shall be paid in accordance with Article 26, less all payments previously made pursuant to this **Contract**.

64.2.4 Direct Costs: Direct Costs as used in this Article 64.2 shall mean:

64.2.4(a) The actual purchase price of material and equipment, plus necessary and reasonable delivery costs,

64.2.4(b) The actual cost of labor involved in construction and installation at the **Site**, and

64.2.4(c) The actual cost of necessary bonds and insurance purchased pursuant to requirements of this **Contract** less any amounts that have been or should be refunded by the **Contractor's** sureties or insurance carriers.

64.2.4(d) Direct Costs shall not include overhead.

64.3 In no event shall any payments under this Article 64 exceed the **Contract** price for such items.

64.4 All payments pursuant to Article 64 shall be in the nature of liquidated damages and shall be accepted by the **Contractor** in full satisfaction of all claims against the **City**.

64.5 The **City** may deduct or set off against any sums due and payable pursuant to this Article 64, any deductions authorized by this **Contract** or by **Law** (including but not limited to liquidated damages) and any claims it may have against the **Contractor**. The **City's** exercise of the right to terminate the **Contract** pursuant to this Article 64 shall not impair or otherwise effect the **City's** right to assert any claims it may have against the **Contractor** in a plenary action.

64.6 Where the **Work** covered by the **Contract** has been substantially completed, as determined in writing by the **Commissioner**, termination of the **Work** shall be handled as an omission of **Work** pursuant to Articles 29 and 33, in which case a change order will be issued to reflect an appropriate reduction in the **Contract** sum, or if the amount is determined after final payment, such amount shall be paid by the **Contractor**.

ARTICLE 65. CHOICE OF LAW, CONSENT TO JURISDICTION AND VENUE

65.1 This **Contract** shall be deemed to be executed in the **City** regardless of the domicile of the **Contractor**, and shall be governed by and construed in accordance with the **Laws** of the State of New York and the **Laws** of the United States, where applicable.

65.2 The parties agree that any and all claims asserted against the **City** arising under this **Contract** or related thereto shall be heard and determined in the courts of the State of New York ("New York State Courts") located in the **City** and County of New York. To effect this **Contract** and intent, the **Contractor** agrees:

65.2.1 If the **City** initiates any action against the **Contractor** in Federal court or in a New York State Court, service of process may be made on the **Contractor** either in person, wherever such **Contractor** may be found, or by registered mail addressed to the **Contractor** at its address as set forth in this **Contract**, or to such other address as the **Contractor** may provide to the **City** in writing; and

65.2.2 With respect to any action between the **City** and the **Contractor** in a New York State Court, the **Contractor** hereby expressly waives and relinquishes any rights it might otherwise have:

65.2.2(a) To move to dismiss on grounds of forum non conveniens;

65.2.2(b) To remove to Federal Court; and

65.2.2(c) To move for a change of venue to a New York State Court outside New York County.

65.2.3 With respect to any action brought by the **City** against the **Contractor** in a Federal Court located in the **City**, the **Contractor** expressly waives and relinquishes any right it might otherwise have to move to transfer the action to a Federal Court outside the **City**.

65.2.4 If the **Contractor** commences any action against the **City** in a court located other than in the **City** and County of New York, upon request of the **City**, the **Contractor** shall either consent to a transfer of the action to a New York State Court of competent jurisdiction located in the **City** and County of New York or, if the Court where the action is initially brought will not or cannot transfer the action, the **Contractor** shall consent to dismiss such action without prejudice and may thereafter reinstate the action in a New York State Court of competent jurisdiction in New York County.

65.3 If any provision(s) of this Article 65 is held unenforceable for any reason, each and all other provision(s) shall nevertheless remain in full force and effect.

ARTICLE 66. PARTICIPATION IN AN INTERNATIONAL BOYCOTT

66.1 The **Contractor** agrees that neither the **Contractor** nor any substantially owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the Federal Export Administration Act of 1979, as amended, or the regulations of the United States Department of Commerce (Commerce Department) promulgated thereunder.

66.2 Upon the final determination by the Commerce Department or any other agency of the United States as to, or conviction of the **Contractor** or a substantially-owned affiliated company thereof for participation in an international boycott in violation of the provisions of the Export Administration Act of 1979, as amended, or the regulations promulgated thereunder, the **Comptroller** may, at his/her option, render forfeit and void this **Contract**.

66.3 The **Contractor** shall comply in all respects, with the provisions of Section 6-114 of the Administrative Code and the rules and regulations issued by the **Comptroller** thereunder.

ARTICLE 67. LOCALLY BASED ENTERPRISE PROGRAM

67.1 This **Contract** is subject to the requirements of Section 6-108.1 of the Administrative Code and regulations promulgated thereunder. No construction contract shall be awarded unless and until these requirements have been complied with in their entirety; however, compliance with this Article 67 is not required if the Agency sets Subcontractor Participation Goals for Minority- and Women-Owned Business Enterprises (M/WBEs).

67.2 Unless specifically waived by the **Commissioner** with the approval of the Division of Economic and Financial Opportunity of the **City** Department of Business Services, if any portion of the **Contract** is subcontracted, not less than ten (10%) percent of the total dollar amount of the **Contract** shall be awarded to locally based enterprises (LBEs); except that where less than ten (10%) percent of the total dollar amount of the **Contract** is subcontracted, such lesser percentage shall be so awarded.

67.3 The **Contractor** shall not require performance and payment bonds from LBE **Subcontractors**.

67.4 If the **Contractor** has indicated prior to award that no **Work** will be subcontracted, no **Work** shall be subcontracted without the prior approval of the **Commissioner**, which shall be granted only if the **Contractor** makes a good faith effort beginning at least six (6) weeks before the **Work** is to be performed to obtain LBE **Subcontractors** to perform the **Work**.

67.5 If the **Contractor** has not identified sufficient LBE **Subcontractors** prior to award, it shall sign a letter of compliance stating that it complies with Section 6-108.1 of the Administrative Code, recognizes that achieving the LBE requirement is a condition of its **Contract**, and shall submit documentation demonstrating its good faith efforts to obtain LBEs. After award, the **Contractor** shall begin to solicit LBE's to perform subcontracted **Work** at least six (6) weeks before the date such **Work** is to be performed and shall demonstrate that a good faith effort has been made to obtain LBEs on each subcontract until it meets the required percentage.

67.6 Failure of the **Contractor** to comply with the requirements of Section 6-108.1 of the Administrative Code and the regulations promulgated thereunder shall constitute a material breach of this **Contract**. Remedy for such breach may include the imposition of any or all of the following sanctions:

67.6.1 Reducing the **Contractor's** compensation by an amount equal to the dollar value of the percentage of the LBE subcontracting requirement not complied with;

67.6.2 Declaring the **Contractor** in default;

67.6.3 If the **Contractor** is an LBE, de-certifying and declaring the **Contractor** ineligible to participate in the LBE program for a period of up to three (3) years.

ARTICLE 68. ANTITRUST

68.1 The **Contractor** hereby assigns, sells, and transfers to the **City** all right, title, and interest in and to any claims and causes of action arising under the antitrust **Laws** of New York State or of the United States relating to the particular goods or services purchased or procured by the **City** under this **Contract**.

ARTICLE 69. MacBRIDE PRINCIPLES PROVISIONS

69.1 Notice To All Prospective **Contractors**:

69.1.1 Local Law No. 34 of 1991 became effective on September 10, 1991 and added Section 6-115.1 of the Administrative Code. The local **Law** provides for certain restrictions on **City Contracts** to express the opposition of the people of the **City** to employment discrimination practices in Northern Ireland to promote freedom of work-place opportunity.

69.1.2 Pursuant to Section 6-115.1, prospective **Contractors** for **Contracts** to provide goods or services involving an expenditure of an amount greater than ten thousand

(\$10,000.) dollars, or for construction involving an amount greater than fifteen thousand (\$15,000.) dollars, are asked to sign a rider in which they covenant and represent, as a material condition of their **Contract**, that any business operations in Northern Ireland conducted by the **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** will be conducted in accordance with the MacBride Principles of nondiscrimination in employment.

69.1.3 Prospective **Contractors** are not required to agree to these conditions. However, in the case of **Contracts** let by competitive sealed bidding, whenever the lowest responsible bidder has not agreed to stipulate to the conditions set forth in this notice and another bidder who has agreed to stipulate to such conditions has submitted a bid within five (5%) percent of the lowest responsible bid for a **Contract** to supply goods, services or contraction of comparable quality, the **Agency** shall refer such bids to the Mayor, the Speaker or other officials, as appropriate, who may determine, in accordance with applicable **Law**, that it is in the best interest of the **City** that the **Contract** be awarded to other than the lowest responsible pursuant to Section 313(b)(2) of the **City** Charter.

69.1.4 In the case of **Contracts** let by other than competitive sealed bidding, if a prospective **Contractor** does not agree to these conditions, no **Agency**, elected official or the **City** Council shall award the **Contract** to that bidder unless the **Agency** seeking to use the goods, services or construction certifies in writing that the **Contract** is necessary for the **Agency** to perform its functions and there is no other responsible **Contractor** who will supply goods, services or construction of comparable quality at a comparable price.

69.2 In accordance with Section 6-115.1 of the Administrative Code, the **Contractor** stipulates that such **Contractor** and any individual or legal entity in which the **Contractor** holds a ten (10%) percent or greater ownership interest in the **Contractor** either:

69.2.1 Have no business operations in Northern Ireland, or

69.2.2 Shall take lawful steps in good faith to conduct any business operations they have in Northern Ireland in accordance with the MacBride Principles, and shall permit independent monitoring of their compliance with such principles.

69.3 For purposes of this Article, the following terms shall have the following meanings:

69.3.1 "MacBride Principles" shall mean those principles relating to nondiscrimination in employment and freedom of work-place opportunity which require employers doing business in Northern Ireland to:

69.3.1(a) increase the representation of individuals from under-represented religious groups in the workforce, including managerial, supervisory, administrative, clerical and technical jobs;

69.3.1(b) take steps to promote adequate security for the protection of employees from under-represented religious groups both at the work-place and while traveling to and from **Work**;

69.3.1(c) ban provocative religious or political emblems from the workplace;

69.3.1(d) publicly advertise all job openings and make special recruitment efforts to attract applicants from under-represented religious groups;

69.3.1(e) establish layoff, recall, and termination procedures which do not in practice favor a particular religious group;

69.3.1(f) abolish all job reservations, apprenticeship restrictions and different employment criteria which discriminate on the basis of religion;

69.3.1(g) develop training programs that will prepare substantial numbers of current employees from under-represented religious groups for skilled jobs, including the expansion of existing programs and the creation of new programs to train, upgrade, and improve the skills of workers from under-represented religious groups;

69.3.1(h) establish procedures to assess, identify, and actively recruit employees from under-represented religious groups with potential for further advancement; and

69.3.1(i) appoint a senior management staff member to oversee affirmative action efforts and develop a timetable to ensure their full implementation.

69.4 The **Contractor** agrees that the covenants and representations in Article 69.2 are material conditions to this **Contract**. In the event the **Agency** receives information that the **Contractor** who made the stipulation required by this Article 69 is in violation thereof, the **Agency** shall review such information and give the **Contractor** an opportunity to respond. If the **Agency** finds that a violation has occurred, the **Agency** shall have the right to declare the **Contractor** in default and/or terminate this **Contract** for cause and procure supplies, services or **Work** from another source in the manner the **Agency** deems proper. In the event of such termination, the **Contractor** shall pay to the **Agency**, or the **Agency** in its sole discretion may withhold from any amounts otherwise payable to the **Contractor**, the difference between the **Contract** price for the uncompleted portion of this **Contract** and the cost to the **Agency** of completing performance of this **Contract** either itself or by engaging another **Contractor** or **Contractors**. In the case of a requirement **Contract**, the **Contractor** shall be liable for such difference in price for the entire amount of supplies required by the **Agency** for the uncompleted term of **Contractor's Contract**. In the case of a construction **Contract**, the **Agency** shall also have the right to hold the **Contractor** in partial or total default in accordance with the default provisions of this **Contract**, and/or may seek debarment or suspension of the **Contractor**. The rights and remedies of the **Agency** hereunder shall be in addition to, and not in lieu of, any rights and remedies the **Agency** has pursuant to this **Contract** or by operation of **Law**.

ARTICLE 70. ELECTRONIC FILING/NYC DEVELOPMENT HUB

70.1 The **Contractor** shall electronically file all alteration type-2 and alteration type-3 applications via the New York City Development Hub Web site, except applications for the following types of minor alterations: enlargements, curb cuts, legalizations, fire alarms, builders pavement plans, and jobs filed on Landmark Preservation Commission calendared properties. All such filings must be professionally certified. Information about electronic filing via the New York City Development Hub is available on the City Department of Buildings Web site at www.nyc.gov/buildings.

ARTICLE 71. PROHIBITION OF TROPICAL HARDWOODS

71.1 Tropical hardwoods, as defined in Section 165 of the New York State Finance Law (Finance Law), shall not be utilized in the performance of this **Contract** except as expressly permitted by Section 165 of the Finance Law.

ARTICLE 72. CONFLICTS OF INTEREST

72.1 Section 2604 of the City Charter and other related provisions of the City Charter, the Administrative Code, and the Penal Law are applicable under the terms of this Contract in relation to conflicts of interest and shall be extended to Subcontractors authorized to perform Work, labor and services pursuant to this Contract and further, it shall be the duty and responsibility of the Contractor to so inform its respective Subcontractors. Notice is hereby given that, under certain circumstances, penalties may be invoked against the donor as well as the recipient of any form of valuable gift.

ARTICLE 73. MERGER CLAUSE

73.1 The written Contract herein, contains all the terms and conditions agreed upon by the parties hereto, and no other agreement, oral or otherwise, regarding the subject matter of this Contract shall be deemed to exist or to bind any of the parties hereto, or to vary any of the terms contained herein.

ARTICLE 74. STATEMENT OF WORK

74.1 The Contractor shall furnish all labor and materials and perform all Work in strict accordance with the Specifications and Addenda thereto, numbered 3.

ARTICLE 75. COMPENSATION TO BE PAID TO CONTRACTOR

75.1 The City will pay and the Contractor will accept in full consideration for the performance of the Contract, subject to additions and deductions as provided herein, the total sum of: One Million Three Hundred Dollars, (\$1,301,248.00), this said sum being the amount at which the Contract was awarded to the Contractor at a public letting thereof, based upon the Contractor's bid for the Contract. and one thousand two hundred forty eight 00/100

ARTICLE 76. ELECTRONIC FUNDS TRANSFER

76.1 In accordance with Section 6-107.1 of the Administrative Code, the Contractor agrees to accept payments under this Contract from the City by electronic funds transfer (EFT). An EFT is any transfer of funds, other than a transaction originated by check, draft or similar paper instrument, which is initiated through an electronic terminal, telephonic instrument or computer or magnetic tape so as to order, instruct or authorize a financial institution to debit or credit an account. Prior to the first payment made under this Contract, the Contractor shall designate one financial institution or other authorized payment agent and shall complete the attached "EFT Vendor Payment Enrollment Form" in order to provide the Commissioner of the City Department of Finance with information necessary for the Contractor to receive electronic funds transfer payments through a designated financial institution or authorized payment agent. The crediting of the amount of a payment to the appropriate account on the books of a financial institution or other authorized payment agent designated by the Contractor shall constitute full satisfaction by the City for the amount of the payment under this Contract. The account information supplied by the Contractor to facilitate the electronic funds transfer shall remain confidential to the fullest extent provided by Law.

76.2 The Commissioner may waive the application of the requirements of this Article 76 to payments on contracts entered into pursuant to Section 315 of the City Charter. In addition, the Commissioner of the Department of Finance and the Comptroller may jointly issue standards pursuant to CITY OF NEW YORK

which the Agency may waive the requirements of this Article 76 for payments in the following circumstances: (i) for individuals or classes of individuals for whom compliance imposes a hardship; (ii) for classifications of types of checks; or (iii) in other circumstances as may be necessary in the interest of the City.

ARTICLE 77. RECORDS RETENTION

77.1 The Contractor agrees to retain all books, records, and other documents relevant to this Contract for six years after the final payment or termination of this Contract, whichever is later. City, state, and federal auditors and any other persons duly authorized by the City shall have full access to and the right to examine any such books, records, and other documents during the retention period.

ARTICLE 78. PARTICIPATION BY MINORITY-OWNED AND WOMEN-OWNED BUSINESS ENTERPRISES IN CITY PROCUREMENT

NOTICE TO ALL PROSPECTIVE CONTRACTORS

ARTICLE I. M/WBE PROGRAM

Local Law No. 129 of 2005 added and Local Law 1 of 2013 amended Section 6-129 of the Administrative Code of the City of New York (hereinafter "Section 6-129"). Section 6-129 establishes the program for participation in City procurement ("M/WBE Program") by minority-owned business enterprises ("MBEs") and women-owned business enterprises ("WBEs"), certified in accordance with Section 1304 of the New York City Charter. As stated in Section 6-129, the intent of the program is to address the impact of discrimination on the City's procurement process, and to promote the public interest in avoiding fraud and favoritism in the procurement process, increasing competition for City business, and lowering contract costs. The contract provisions contained herein are pursuant to Section 6-129, and the rules of the Department of Small Business Services ("DSBS") promulgated thereunder.

If this Contract is subject to the M/WBE Program established by Section 6-129, the specific requirements of MBE and/or WBE participation for this Contract are set forth in Schedule B of the Contract (entitled the "M/WBE Utilization Plan"), and are detailed below. The Contractor must comply with all applicable MBE and WBE requirements for this Contract.

All provisions of Section 6-129 are hereby incorporated in the Contract by reference and all terms used herein that are not defined herein shall have the meanings given such terms in Section 6-129. Article I, Part A, below, sets forth provisions related to the participation goals for construction, standard and professional services contracts. Article I, Part B, below, sets forth miscellaneous provisions related to the M/WBE Program.

PART A

PARTICIPATION GOALS FOR CONSTRUCTION, STANDARD AND PROFESSIONAL SERVICES CONTRACTS OR TASK ORDERS

1. The MBE and/or WBE Participation Goals established for this Contract or Task Orders issued pursuant to this Contract, ("Participation Goals"), as applicable, are set forth on Schedule B, Part I to this Contract (see Page 1, line 1 Total Participation Goals) or will be set forth on Schedule B, Part I to Task Orders issued pursuant to this Contract, as applicable.

The Participation Goals represent a percentage of the total dollar value of the Contract or Task Order, as applicable, that may be achieved by awarding subcontracts to firms certified with New York City Department of Small Business Services as MBEs and/or WBEs, and/or by crediting the participation of prime contractors and/or qualified joint ventures as provided in Section 3 below, unless the goals have been waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

2. If Participation Goals have been established for this Contract or Task Orders issued pursuant to this Contract, Contractor agrees or shall agree as a material term of the Contract that Contractor shall be subject to the Participation

Goals, unless the goals are waived or modified by Agency in accordance with Section 6-129 and Part A, Sections 10 and 11 below, respectively.

3. If **Participation Goals** have been established for this Contract or Task Order issued pursuant to this Contract, a Contractor that is an MBE and/or WBE shall be permitted to count its own participation toward fulfillment of the relevant **Participation Goal**, provided that in accordance with Section 6-129 the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that the Contractor pays to direct subcontractors (as defined in Section 6-129(c)(13)), and provided further that a Contractor that is certified as both an MBE and a WBE may count its own participation either toward the goal for MBEs or the goal for WBEs, but not both.

A Contractor that is a qualified joint venture (as defined in Section 6-129(c)(30)) shall be permitted to count a percentage of its own participation toward fulfillment of the relevant **Participation Goal**. In accordance with Section 6-129, the value of Contractor's participation shall be determined by subtracting from the total value of the Contract or Task Order, as applicable, any amounts that Contractor pays to direct subcontractors, and then multiplying the remainder by the percentage to be applied to total profit to determine the amount to which an MBE or WBE is entitled pursuant to the joint venture agreement, provided that where a participant in a joint venture is certified as both an MBE and a WBE, such amount shall be counted either toward the goal for MBEs or the goal for WBEs, but not both.

4. A. If **Participation Goals** have been established for this Contract, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Utilization Plan, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. In the event that this M/WBE Utilization Plan indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals**, the bid or proposal, as applicable, shall be deemed non-responsive, unless Agency has granted the bidder or proposer, as applicable, a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

B. (i) If this Contract is for a master services agreement or other requirements type contract that will result in the issuance of Task Orders that will be individually registered ("Master Services Agreement") and is subject to M/WBE **Participation Goals**, a prospective contractor shall be required to submit with its bid or proposal, as applicable, a completed Schedule B, M/WBE Participation Requirements for Master Services Agreements That Will Require Individually Registered Task Orders, Part II (page 2) indicating the prospective contractor's certification and required affirmations to make all reasonable good faith efforts to meet participation goals established on each individual Task Order issued pursuant to this Contract, or if a partial waiver is obtained or such goals are modified by the Agency, to meet the modified **Participation Goals** by soliciting and obtaining the participation of certified MBE and/or WBE firms. In the event that the Schedule B indicates that the bidder or proposer, as applicable, does not intend to meet the **Participation Goals** that may be established on Task Orders issued pursuant to this Contract, the bid or proposal, as applicable, shall be deemed nonresponsive.

(ii) **Participation Goals** on a Master Services Agreement will be established for individual Task Orders issued after the Master Services Agreement is awarded. If **Participation Goals** have been established on a Task Order, a contractor shall be required to submit a Schedule B – M/WBE Utilization Plan For Independently Registered Task Orders That Are Issued Pursuant to Master Services Agreements, Part II (see Pages 2-4) indicating: (a) whether the contractor is an MBE or WBE, or qualified joint venture; (b) the percentage of work it intends to award to direct subcontractors; and (c) in cases where the contractor intends to award direct subcontracts, a description of the type and dollar value of work designated for participation by MBEs and/or WBEs, and the time frames in which such work is scheduled to begin and end. The contractor must engage in good faith efforts to meet the **Participation Goals** as established for the Task Order unless Agency has granted the contractor a pre-award waiver of the Participation Goals in accordance with Section 6-129 and Part A, Section 10 below.

C. THE BIDDER/PROPOSER MUST COMPLETE THE SCHEDULE B INCLUDED HEREIN (SCHEDULE B, PART II). A SCHEDULE B SUBMITTED BY THE BIDDER/PROPOSER WHICH DOES NOT INCLUDE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS (SEE SECTION V OF PART II) WILL BE DEEMED TO BE NON-RESPONSIVE, UNLESS A FULL WAIVER OF THE PARTICIPATION GOALS IS GRANTED (SCHEDULE B, PART III). IN THE EVENT THAT THE CITY DETERMINES THAT THE BIDDER/PROPOSER HAS SUBMITTED A SCHEDULE B WHERE THE VENDOR CERTIFICATION AND REQUIRED AFFIRMATIONS ARE COMPLETED BUT OTHER

ASPECTS OF THE SCHEDULE B ARE NOT COMPLETE, OR CONTAIN A COPY OR COMPUTATION ERROR THAT IS AT ODDS WITH THE VENDOR CERTIFICATION AND AFFIRMATIONS, THE BIDDER/PROPOSER WILL BE NOTIFIED BY THE AGENCY AND WILL BE GIVEN FOUR (4) CALENDAR DAYS FROM RECEIPT OF NOTIFICATION TO CURE THE SPECIFIED DEFICIENCIES AND RETURN A COMPLETED SCHEDULE B TO THE AGENCY. FAILURE TO DO SO WILL RESULT IN A DETERMINATION THAT THE BID/PROPOSAL IS NON-RESPONSIVE. RECEIPT OF NOTIFICATION IS DEFINED AS THE DATE NOTICE IS E-MAILED OR FAXED (IF THE BIDDER/PROPOSER HAS PROVIDED AN E-MAIL ADDRESS OR FAX NUMBER), OR NO LATER THAN FIVE (5) CALENDAR DAYS FROM THE DATE OF MAILING OR UPON DELIVERY, IF DELIVERED.

5. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, within 30 days of issuance by Agency of a notice to proceed, submit a list of proposed persons or entities to which it intends to award subcontracts within the subsequent 12 months. In the case of multiyear contracts, such list shall also be submitted every year thereafter. The Agency may also require the Contractor to report periodically about the contracts awarded by its direct subcontractors to indirect subcontractors (as defined in Section 6-129(c)(22)). **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor must identify all those to which it intends to award construction subcontracts for any portion of the Wicks trade work at the time of bid submission, regardless of what point in the life of the contract such subcontracts will occur. In identifying intended subcontractors in the bid submission, bidders may satisfy any Participation Goals established for this Contract by proposing one or more subcontractors that are MBEs and/or WBEs for any portion of the Wicks trade work. In the event that the Contractor's selection of a subcontractor is disapproved, the Contractor shall have a reasonable time to propose alternate subcontractors.**

6. MBE and WBE firms must be certified by DSBS in order for the Contractor to credit such firms' participation toward the attainment of the **Participation Goals**. Such certification must occur prior to the firms' commencement of work. A list of MBE and WBE firms may be obtained from the DSBS website at www.nyc.gov/buycertified, by emailing DSBS at buyer@sbs.nyc.gov, by calling (212) 513-6356, or by visiting or writing DSBS at 110 William St., New York, New York, 10038, 7th floor. Eligible firms that have not yet been certified may contact DSBS in order to seek certification by visiting www.nyc.gov/getcertified, emailing MWBE@sbs.nyc.gov, or calling the DSBS certification helpline at (212) 513-6311. A firm that is certified as both an MBE and a WBE may be counted either toward the goal for MBEs or the goal for WBEs, but not both. No credit shall be given for participation by a graduate MBE or graduate WBE, as defined in Section 6-129(c)(20).

7. Where an M/WBE Utilization Plan has been submitted, the Contractor shall, with each voucher for payment, and/or periodically as Agency may require, submit statements, certified under penalty of perjury, which shall include, but not be limited to: the total amount the Contractor paid to its direct subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount direct subcontractors paid to indirect subcontractors; the names, addresses and contact numbers of each MBE or WBE hired as a subcontractor by the Contractor, and, where applicable, hired by any of the Contractor's direct subcontractors; and the dates and amounts paid to each MBE or WBE. The Contractor shall also submit, along with its voucher for final payment: the total amount it paid to subcontractors, and, where applicable pursuant to Section 6-129(j), the total amount its direct subcontractors paid directly to their indirect subcontractors; and a final list, certified under penalty of perjury, which shall include the name, address and contact information of each subcontractor that is an MBE or WBE, the work performed by, and the dates and amounts paid to each.

8. If payments made to, or work performed by, MBEs or WBEs are less than the amount specified in the Contractor's M/WBE Utilization Plan, Agency shall take appropriate action, in accordance with Section 6-129 and Article II below, unless the Contractor has obtained a modification of its M/WBE Utilization Plan in accordance with Section 6-129 and Part A, Section 11 below.

9. Where an M/WBE Utilization Plan has been submitted, and the Contractor requests a change order the value of which exceeds the greater of 10 percent of the Contract or Task Order, as applicable, or \$500,000, Agency shall review the scope of work for the Contract or Task Order, as applicable, and the scale and types of work involved in the change order, and determine whether the **Participation Goals** should be modified.

10. Pre-award waiver of the **Participation Goals**. (a) A bidder or proposer, or contractor with respect to a Task Order, may seek a pre-award full or partial waiver of the **Participation Goals** in accordance with Section 6-129, which

requests that Agency change one or more **Participation Goals** on the grounds that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, or by demonstrating that it has legitimate business reasons for proposing a lower level of subcontracting in its M/WBE Utilization Plan.

(b) To apply for a full or partial waiver of the **Participation Goals**, a bidder, proposer, or contractor, as applicable, must complete Part III (Page 5) of Schedule B and submit such request no later than seven (7) calendar days prior to the date and time the bids, proposals, or Task Orders are due, in writing to the Agency by email at poped@ddc.nyc.gov or via facsimile at (718) 391-1886. Bidders, proposers, or contractors, as applicable, who have submitted requests will receive an Agency response by no later than two (2) calendar days prior to the due date for bids, proposals, or Task Orders; provided, however, that if that date would fall on a weekend or holiday, an Agency response will be provided by close-of-business on the business day before such weekend or holiday date.

(c) If the Agency determines that the **Participation Goals** are unreasonable in light of the availability of certified firms to perform the services required, it shall revise the solicitation and extend the deadline for bids and proposals, or revise the Task Order, as applicable.

(d) Agency may grant a full or partial waiver of the **Participation Goals** to a bidder, proposer or contractor, as applicable, who demonstrates—before submission of the bid, proposal or Task Order, as applicable—that it has legitimate business reasons for proposing the level of subcontracting in its M/WBE Utilization Plan. In making its determination, Agency shall consider factors that shall include, but not be limited to, whether the bidder, proposer or contractor, as applicable, has the capacity and the bona fide intention to perform the Contract without any subcontracting, or to perform the Contract without awarding the amount of subcontracts represented by the **Participation Goals**. In making such determination, Agency may consider whether the M/WBE Utilization Plan is consistent with past subcontracting practices of the bidder, proposer or contractor, as applicable, whether the bidder, proposer or contractor, as applicable, has made efforts to form a joint venture with a certified firm, and whether the bidder, proposer, or contractor, as applicable, has made good faith efforts to identify other portions of the Contract that it intends to subcontract.

11. **Modification of M/WBE Utilization Plan.** (a) A Contractor may request a modification of its M/WBE Utilization Plan after award of this Contract. **PLEASE NOTE: If this Contract is a public works project subject to GML §101(5) (i.e., a contract valued at or below \$3M for projects in New York City) or if the Contract is subject to a project labor agreement in accordance with Labor Law §222, and the bidder is required to identify at the time of bid submission its intended subcontractors for the Wicks trades (plumbing and gas fitting; steam heating, hot water heating, ventilating and air conditioning (HVAC); and electric wiring), the Contractor may request a Modification of its M/WBE Utilization Plan as part of its bid submission.** The Agency may grant a request for Modification of a Contractor's M/WBE Utilization Plan if it determines that the Contractor has established, with appropriate documentary and other evidence, that it made reasonable, good faith efforts to meet the **Participation Goals**. In making such determination, Agency shall consider evidence of the following efforts, as applicable, along with any other relevant factors:

- (i) The Contractor advertised opportunities to participate in the Contract, where appropriate, in general circulation media, trade and professional association publications and small business media, and publications of minority and women's business organizations;
- (ii) The Contractor provided notice of specific opportunities to participate in the Contract, in a timely manner, to minority and women's business organizations;
- (iii) The Contractor sent written notices, by certified mail or facsimile, in a timely manner, to advise MBEs or WBEs that their interest in the Contract was solicited;
- (iv) The Contractor made efforts to identify portions of the work that could be substituted for portions originally designated for participation by MBEs and/or WBEs in the M/WBE Utilization Plan, and for which the Contractor claims an inability to retain MBEs or WBEs;
- (v) The Contractor held meetings with MBEs and/or WBEs prior to the date their bids or proposals were due, for the purpose of explaining in detail the scope and requirements of the work for which their bids or proposals were solicited;
- (vi) The Contractor made efforts to negotiate with MBEs and/or WBEs as relevant to perform specific subcontracts, or act as suppliers or service providers;
- (vii) Timely written requests for assistance made by the Contractor to Agency's M/WBE liaison officer and to DSBS;

- (viii) Description of how recommendations made by DSBS and Agency were acted upon and an explanation of why action upon such recommendations did not lead to the desired level of participation of MBEs and/or WBEs.

Agency's M/WBE officer shall provide written notice to the Contractor of the determination.

(b) The Agency may modify the **Participation Goals** when the scope of the work has been changed by the Agency in a manner that affects the scale and types of work that the Contractor indicated in its M/WBE Utilization Plan would be awarded to subcontractors.

12. If this Contract is for an indefinite quantity of construction, standard or professional services or is a requirements type contract and the Contractor has submitted an M/WBE Utilization Plan and has committed to subcontract work to MBEs and/or WBEs in order to meet the **Participation Goals**, the Contractor will not be deemed in violation of the M/WBE Program requirements for this Contract with regard to any work which was intended to be subcontracted to an MBE and/or WBE to the extent that the Agency has determined that such work is not needed.

13. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, at least once annually during the term of the Contract or Task Order, as applicable, Agency shall review the Contractor's progress toward attainment of its M/WBE Utilization Plan, including but not limited to, by reviewing the percentage of work the Contractor has actually awarded to MBE and/or WBE subcontractors and the payments the Contractor made to such subcontractors.

14. If **Participation Goals** have been established for this Contract or a Task Order issued pursuant to this Contract, Agency shall evaluate and assess the Contractor's performance in meeting those goals, and such evaluation and assessment shall become part of the Contractor's overall contract performance evaluation.

PART B: MISCELLANEOUS

1. The Contractor shall take notice that, if this solicitation requires the establishment of an M/WBE Utilization Plan, the resulting contract may be audited by DSBS to determine compliance with Section 6-129. See §6-129(e)(10). Furthermore, such resulting contract may also be examined by the City's Comptroller to assess compliance with the M/WBE Utilization Plan.

2. Pursuant to DSBS rules, construction contracts that include a requirement for an M/WBE Utilization Plan shall not be subject to the law governing Locally Based Enterprises set forth in Section 6-108.1 of the Administrative Code of the City of New York.

3. DSBS is available to assist contractors and potential contractors in determining the availability of MBEs and/or WBEs to participate as subcontractors, and in identifying opportunities that are appropriate for participation by MBEs and/or WBEs in contracts.

4. Prospective contractors are encouraged to enter into qualified joint venture agreements with MBEs and/or WBEs as defined by Section 6-129(c)(30).

5. By submitting a bid or proposal the Contractor hereby acknowledges its understanding of the M/WBE Program requirements set forth herein and the pertinent provisions of Section 6-129, and any rules promulgated thereunder, and if awarded this Contract, the Contractor hereby agrees to comply with the M/WBE Program requirements of this Contract and pertinent provisions of Section 6-129, and any rules promulgated thereunder, all of which shall be deemed to be material terms of this Contract. The Contractor hereby agrees to make all reasonable, good faith efforts to solicit and obtain the participation of MBEs and/or WBEs to meet the required **Participation Goals**.

ARTICLE II. ENFORCEMENT

1. If Agency determines that a bidder or proposer, as applicable, has, in relation to this procurement, violated Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, Agency may disqualify such bidder or proposer, as applicable, from competing for this Contract and the Agency may revoke such bidder's or proposer's prequalification status, if applicable.

2. Whenever Agency believes that the Contractor or a subcontractor is not in compliance with Section 6-129 or the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to any M/WBE Utilization Plan, Agency shall send a written notice to the Contractor describing the alleged noncompliance and offering the Contractor an opportunity to be heard. Agency shall then conduct an investigation to determine whether such Contractor or subcontractor is in compliance.

3. In the event that the Contractor has been found to have violated Section 6-129, the DSBS rules promulgated pursuant to Section 6-129, or any provision of this Contract that implements Section 6-129, including, but not limited to, any M/WBE Utilization Plan, Agency may determine that one of the following actions should be taken:

- (a) entering into an agreement with the Contractor allowing the Contractor to cure the violation;
- (b) revoking the Contractor's pre-qualification to bid or make proposals for future contracts;
- (c) making a finding that the Contractor is in default of the Contract;
- (d) terminating the Contract;
- (e) declaring the Contractor to be in breach of Contract;
- (f) withholding payment or reimbursement;
- (g) determining not to renew the Contract;
- (h) assessing actual and consequential damages;
- (i) assessing liquidated damages or reducing fees, provided that liquidated damages may be based on amounts representing costs of delays in carrying out the purposes of the M/WBE Program, or in meeting the purposes of the Contract, the costs of meeting utilization goals through additional procurements, the administrative costs of investigation and enforcement, or other factors set forth in the Contract;
- (j) exercising rights under the Contract to procure goods, services or construction from another contractor and charge the cost of such contract to the Contractor that has been found to be in noncompliance; or
- (k) taking any other appropriate remedy.

4. If an M/WBE Utilization Plan has been submitted, and pursuant to this Article II, Section 3, the Contractor has been found to have failed to fulfill its **Participation Goals** contained in its M/WBE Utilization Plan or the **Participation Goals** as modified by Agency pursuant to Article I, Part A, Section 11, Agency may assess liquidated damages in the amount of ten percent (10%) of the difference between the dollar amount of work required to be awarded to MBE and/or WBE firms to meet the **Participation Goals** and the dollar amount the Contractor actually awarded and paid, and/or credited, to MBE and/or WBE firms. In view of the difficulty of accurately ascertaining the loss which the City will suffer by reason of Contractor's failure to meet the **Participation Goals**, the foregoing amount is hereby fixed and agreed as the liquidated damages that the City will suffer by reason of such failure, and not as a penalty. Agency may deduct and retain out of any monies which may become due under this Contract the amount of any such liquidated damages; and in case the amount which may become due under this Contract shall be less than the amount of liquidated damages suffered by the City, the Contractor shall be liable to pay the difference.


5. Whenever Agency has reason to believe that an MBE and/or WBE is not qualified for certification, or is participating in a contract in a manner that does not serve a commercially useful function (as defined in Section 6-129(c)(8)), or has violated any provision of Section 6-129, Agency shall notify the Commissioner of DSBS who shall determine whether the certification of such business enterprise should be revoked.

6. Statements made in any instrument submitted to Agency pursuant to Section 6-129 shall be submitted under penalty of perjury and any false or misleading statement or omission shall be grounds for the application of any applicable criminal and/or civil penalties for perjury. The making of a false or fraudulent statement by an MBE and/or WBE in any instrument submitted pursuant to Section 6-129 shall, in addition, be grounds for revocation of its certification.


7. The Contractor's record in implementing its M/WBE Utilization Plan shall be a factor in the evaluation of its performance. Whenever Agency determines that a Contractor's compliance with an M/WBE Utilization Plan has been unsatisfactory, Agency shall, after consultation with the City Chief Procurement Officer, file an advice of caution form for inclusion in VENDEX as caution data.

IN WITNESS WHEREOF, the Commissioner, on behalf of the City of New York, and the Contractor, have executed this agreement in quadruplicate, two parts of which are to remain with the Commissioner, another to be filed with the Comptroller of the City, and the fourth to be delivered to the Contractor.

THE CITY OF NEW YORK

By: 
Deputy Commissioner

CONTRACTOR:

By: 
(Member of Firm or Officer of Corporation)

Title: PRESIDENT

(Where Contractor is a Corporation, add):
Attest:

Secretary


(Seal)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of New York County of Queens ss:

On this 22nd day of Oct. 2014, before me personally came ABDUL L MUNAWAR to me known, who, being by me duly sworn did depose and say that he resides at 6901 77th AVE BROOKLYN NY 11228 that he is the PRESIDENT of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

VICTORIA AYO-VAUGHAN
Notary Public, State of New York
Registration #01AY5014042
Qualified in Queens County
Commission Expires July 15, 2015

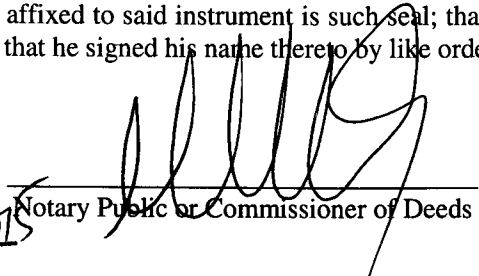

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:


On this _____ day of _____, before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT BY COMMISSIONER

State of New York County of Queens ss:

On this 23rd day of Oct., 2014, before me personally came Eric Macfarlane to me known, and known to be the Deputy Commissioner of the Department of Design and Construction of The City of New York, the person described as such in and who as such executed the foregoing instrument and he acknowledged to me that he executed the same as Deputy Commissioner for the purposes therein mentioned.

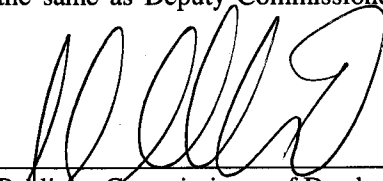

Notary Public or Commissioner of Deeds

VICTORIA AYO-VAUGHAN
Notary Public, State of New York
Registration #01AY5014042
Qualified in Queens County
Commission Expires July 15, 2015

AUTHORITY

MAYOR'S CERTIFICATE NO. CBX
BUDGET DIRECTOR'S CERTIFICATE NO.

DATED
DATED

APPROPRIATION
COMMISSIONER'S CERTIFICATE

In conformity with the provisions of Section 6-101 of the Administrative Code of the City of New York, it is hereby certified that the estimated cost of the work, materials and supplies required by the within Contract, amounting to


One Million Three Hundred and One Thousand
Two Hundred Forty Eight Dollars and 00/100 Cents.

Dollars (\$ 1,301,248.00)

is chargeable to the fund of the Department of Design and Construction entitled Code

Department of Design and Construction

I hereby certify that the specifications contained herein comply with the terms and conditions of the BUDGET.

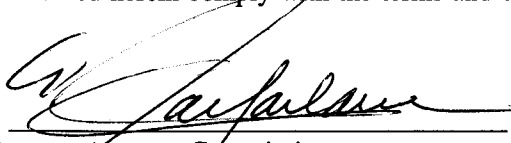
Deputy Commissioner

COMPTROLLER'S CERTIFICATE

The City of New York _____

Pursuant to the provisions of Section 6-101 of the Administrative Code of the City of New York, I hereby certify that there remains unapplied and unexpended a balance of the above mentioned fund applicable to this Contract sufficient to pay the estimated expense of executing the same viz:

\$ _____

Comptroller

**MAYOR'S CERTIFICATE OR
CERTIFICATE OF THE DIRECTOR
OF THE BUDGET**

Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 1)

PERFORMANCE BOND #1

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

hereinafter referred to as the "Principal", and _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

(\$ _____) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less.
Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 2)

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to (1) pay the City the cost to complete the contract as determined by the City in excess of the balance of the Contract held by the City, plus any damages or costs to which the City is entitled, up to the full amount of the above penal sum, (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof, or (3) tender a completion Contractor that is acceptable to the City. The Surety (Sureties) further agrees, at its option, either to notify the City that it elects to pay the city the cost of completion plus any applicable damages and costs under option (1) above, or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and, if the Surety elects to fully perform and complete the Work, then to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. If the Surety elects to tender payment pursuant to (1) above, then the Surety shall tender such amount within fifteen (15) business days notification from the City of the cost of completion. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and complete all Work as provided herein, or to tender a completion contractor.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, and waivers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to subcontractors shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal. Notwithstanding the above, if the City makes payments to the Principal before the time required by the contract that in the aggregate exceed \$100,000 or 10% of the Contract price, whichever is less, and that have not become earned prior to the Principal being found to be in default, then all payments made to the Principal before the time required by the Contract shall be added to the remaining contract value available to be paid for the completion of the Contract as if such sums had not been paid to the Principal, but shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and to complete all Work as provided herein, or to tender a completion contractor.

Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this _____ day of _____, _____.

(Seal) _____ (L.S.)
Principal

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

Bond Premium Rate _____

Bond Premium Cost _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less.
Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA")
for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 1)

PERFORMANCE BOND #1

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

Castlestone Construction Corp.

36-20 13th Street, Long Island City, NY 11106

hereinafter referred to as the "Principal", and _____

Bankers Insurance Company

11101 Roosevelt Blvd. N., St. Petersburg, FL 33716

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK,
hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

One Million Three Hundred One Thousand Two Hundred Forty-Eight and 00/100 Dollars

(\$ 1,301,248.00) Dollars, lawful money of the United States, for the payment of which said sum of
money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors
and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

St. George Theater Stage Rigging Replacement - Borough of Staten Island

FMS ID #PV467-STG E-PIN #85014B0147001 DDC PIN #8502014PV0014C

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;



Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less.
Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA")
for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 2)

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to (1) pay the City the cost to complete the contract as determined by the City in excess of the balance of the Contract held by the City, plus any damages or costs to which the City is entitled, up to the full amount of the above penal sum, (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof, or (3) tender a completion Contractor that is acceptable to the City. The Surety (Sureties) further agrees, at its option, either to notify the City that it elects to pay the city the cost of completion plus any applicable damages and costs under option (1) above, or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and, if the Surety elects to fully perform and complete the Work, then to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. If the Surety elects to tender payment pursuant to (1) above, then the Surety shall tender such amount within fifteen (15) business days notification from the City of the cost of completion. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and complete all Work as provided herein, or to tender a completion contractor.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, and waivers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to subcontractors shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal. Notwithstanding the above, if the City makes payments to the Principal before the time required by the contract that in the aggregate exceed \$100,000 or 10% of the Contract price, whichever is less, and that have not become earned prior to the Principal being found to be in default, then all payments made to the Principal before the time required by the Contract shall be added to the remaining contract value available to be paid for the completion of the Contract as if such sums had not been paid to the Principal, but shall not provide a basis for non-performance of its obligation to pay the City the cost of completion, to commence and to complete all Work as provided herein, or to tender a completion contractor.



Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this 15th day of October, 2014.

Castlestone Construction Corp.

(Seal)

Abdul L. Muhammad
(L.S.)

Principal

By: _____

(Seal)

Bankers Insurance Company

Surety

Scott M. Adams
By: _____
Scott M. Adams, Attorney-in-Fact

(Seal)

Surety

By: _____

(Seal)

Surety

By: _____

Bond Premium Rate \$25.00 per \$1,000

Bond Premium Cost \$32,531.00

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.



Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less.
Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA")
for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of NY County of kings ss:

On this 21 day of October 2014, before me personally came Abdul L. Munawar
to me known, who, being by me duly sworn did depose and say that he resides at 6901 7th Ave. Brooklyn, NY 11228
Castlestone Construction Corp. that he is the President of the
corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation;
that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said
corporation, and that he signed his name thereto by like order.


Notary Public or Commissioner of Deeds

MIKHAIL AZAYEV
Notary Public, State of New York
Qualified in Kings County
Reg. No. 01AZ6304109
My Commission Expires 05/19/2018

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____
to me known, and known to me to be one of the members of the firm of _____
described in and who executed the foregoing instrument; and he acknowledged to me
that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____
to me known, and known to me to be the person described in and who executed the foregoing instrument; and
acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties;
(b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by
agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions
of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was
issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

* * * * *

Affix Acknowledgments and Justification of Sureties

MINERAL ADVERSE
Wash. Public State of New York
Quarries in Forest County
No. 0142800-00
for Commission Report 11/12

BANKERS INSURANCE COMPANY

STATE OF NEW JERSEY

COUNTY OF MORRIS

On this 15th day of October, 2014, before me, a Notary Public within and for said County and State, personally appeared **Scott M. Adams** to me personally known, who being duly sworn, upon oath, did say that he is the **Attorney-in-fact** of and for the **Bankers Insurance Company**, a corporation created, organized and existing under and by the virtue of the laws of the **State of Florida** that the Corporate seal affixed to the foregoing instrument is the seal of said Corporation; that the seal was affixed; and the said **Scott M. Adams** did acknowledge that he executed the said instrument as the free act and deed of said Corporation.




Francine Befano

Notary Public of New Jersey

ID #2395145

My Commission Expires April 13, 2015



Power of Attorney

3228208

Bankers Insurance Company

KNOW ALL MEN BY THESE PRESENTS, that **BANKERS INSURANCE COMPANY**, a corporation duly organized under the laws of the State of Florida, and having its principal office in the City of St. Petersburg, Pinellas County, Florida, does hereby nominate, constitute and appoint:

* Scott M. Adams *

of the City of Cedar Knolls, Morris County, State of New Jersey, its true and lawful Attorney-in-fact, with full power and authority hereby conferred upon him/her to make, execute, seal and deliver for and on its behalf, as Surety, as its act and deed, any and all bonds, undertakings consent or Agreement not exceeding the sum of Three Million and xx/100 Dollars----- \$3,000,000.00 which this Company may be authorized to write.

This Power of Attorney is granted and is signed and sealed under and by the authority of the following resolutions adopted by the Board of Directors of Bankers Insurance Company, and now in force to-wit:

BE IT RESOLVED, that the Chairman of the Board, President and any Vice President of the Corporation are hereby authorized to execute Powers of Attorney, qualifying the Attorney(s)-in-Fact named in the Powers of Attorney to execute, on behalf of the Corporation, bonds, undertakings and contracts of suretyship; and that the Secretary or any Assistant Secretary of the Corporation are hereby authorized to attest the execution of any such Power of Attorney.

BE IT FURTHER RESOLVED, that the signatures of such officers may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, any and such Power of Attorney or certificate bearing such facsimile signatures shall be valid and binding upon the corporation when so affixed in the future with respect to any bond, undertaking or contract of suretyship to which it is attached.

IN WITNESS WHEREOF, Bankers Insurance Company has caused these presents to be executed by their duly authorized officers as of this 4th day of April, 2013.

ATTEST:

Ian Barber
Ian Barber, Assistant Secretary

BANKERS INSURANCE COMPANY
By: Wilbur L. Martin IV
Wilbur L. Martin IV, President

STATE OF FLORIDA)
COUNTY OF PINELLAS)

The foregoing instrument was acknowledged before me 4th day of April, 2013 by Wilbur L. Martin IV and Ian Barber, as President and Assistant Secretary, respectively, of Bankers Insurance Company, a Florida corporation, on behalf of the corporation.

Personally known OR Produced Identification - Type of Identification Provided _____



(SEAL)


Janet M. Bell
(NOTARY PUBLIC)

I, the undersigned, Assistant Secretary of Bankers Insurance Company do hereby certify that the original Power of Attorney, of which the foregoing is a full, true and correct copy, is in full force and effect.

IN WITNESS WHEREOF, I have hereunto subscribed my name as Assistant Secretary, and affix the corporate seal of the Corporation this 5th day of October, 2014

(SEAL)

Ian Barber
Ian Barber, Assistant Secretary

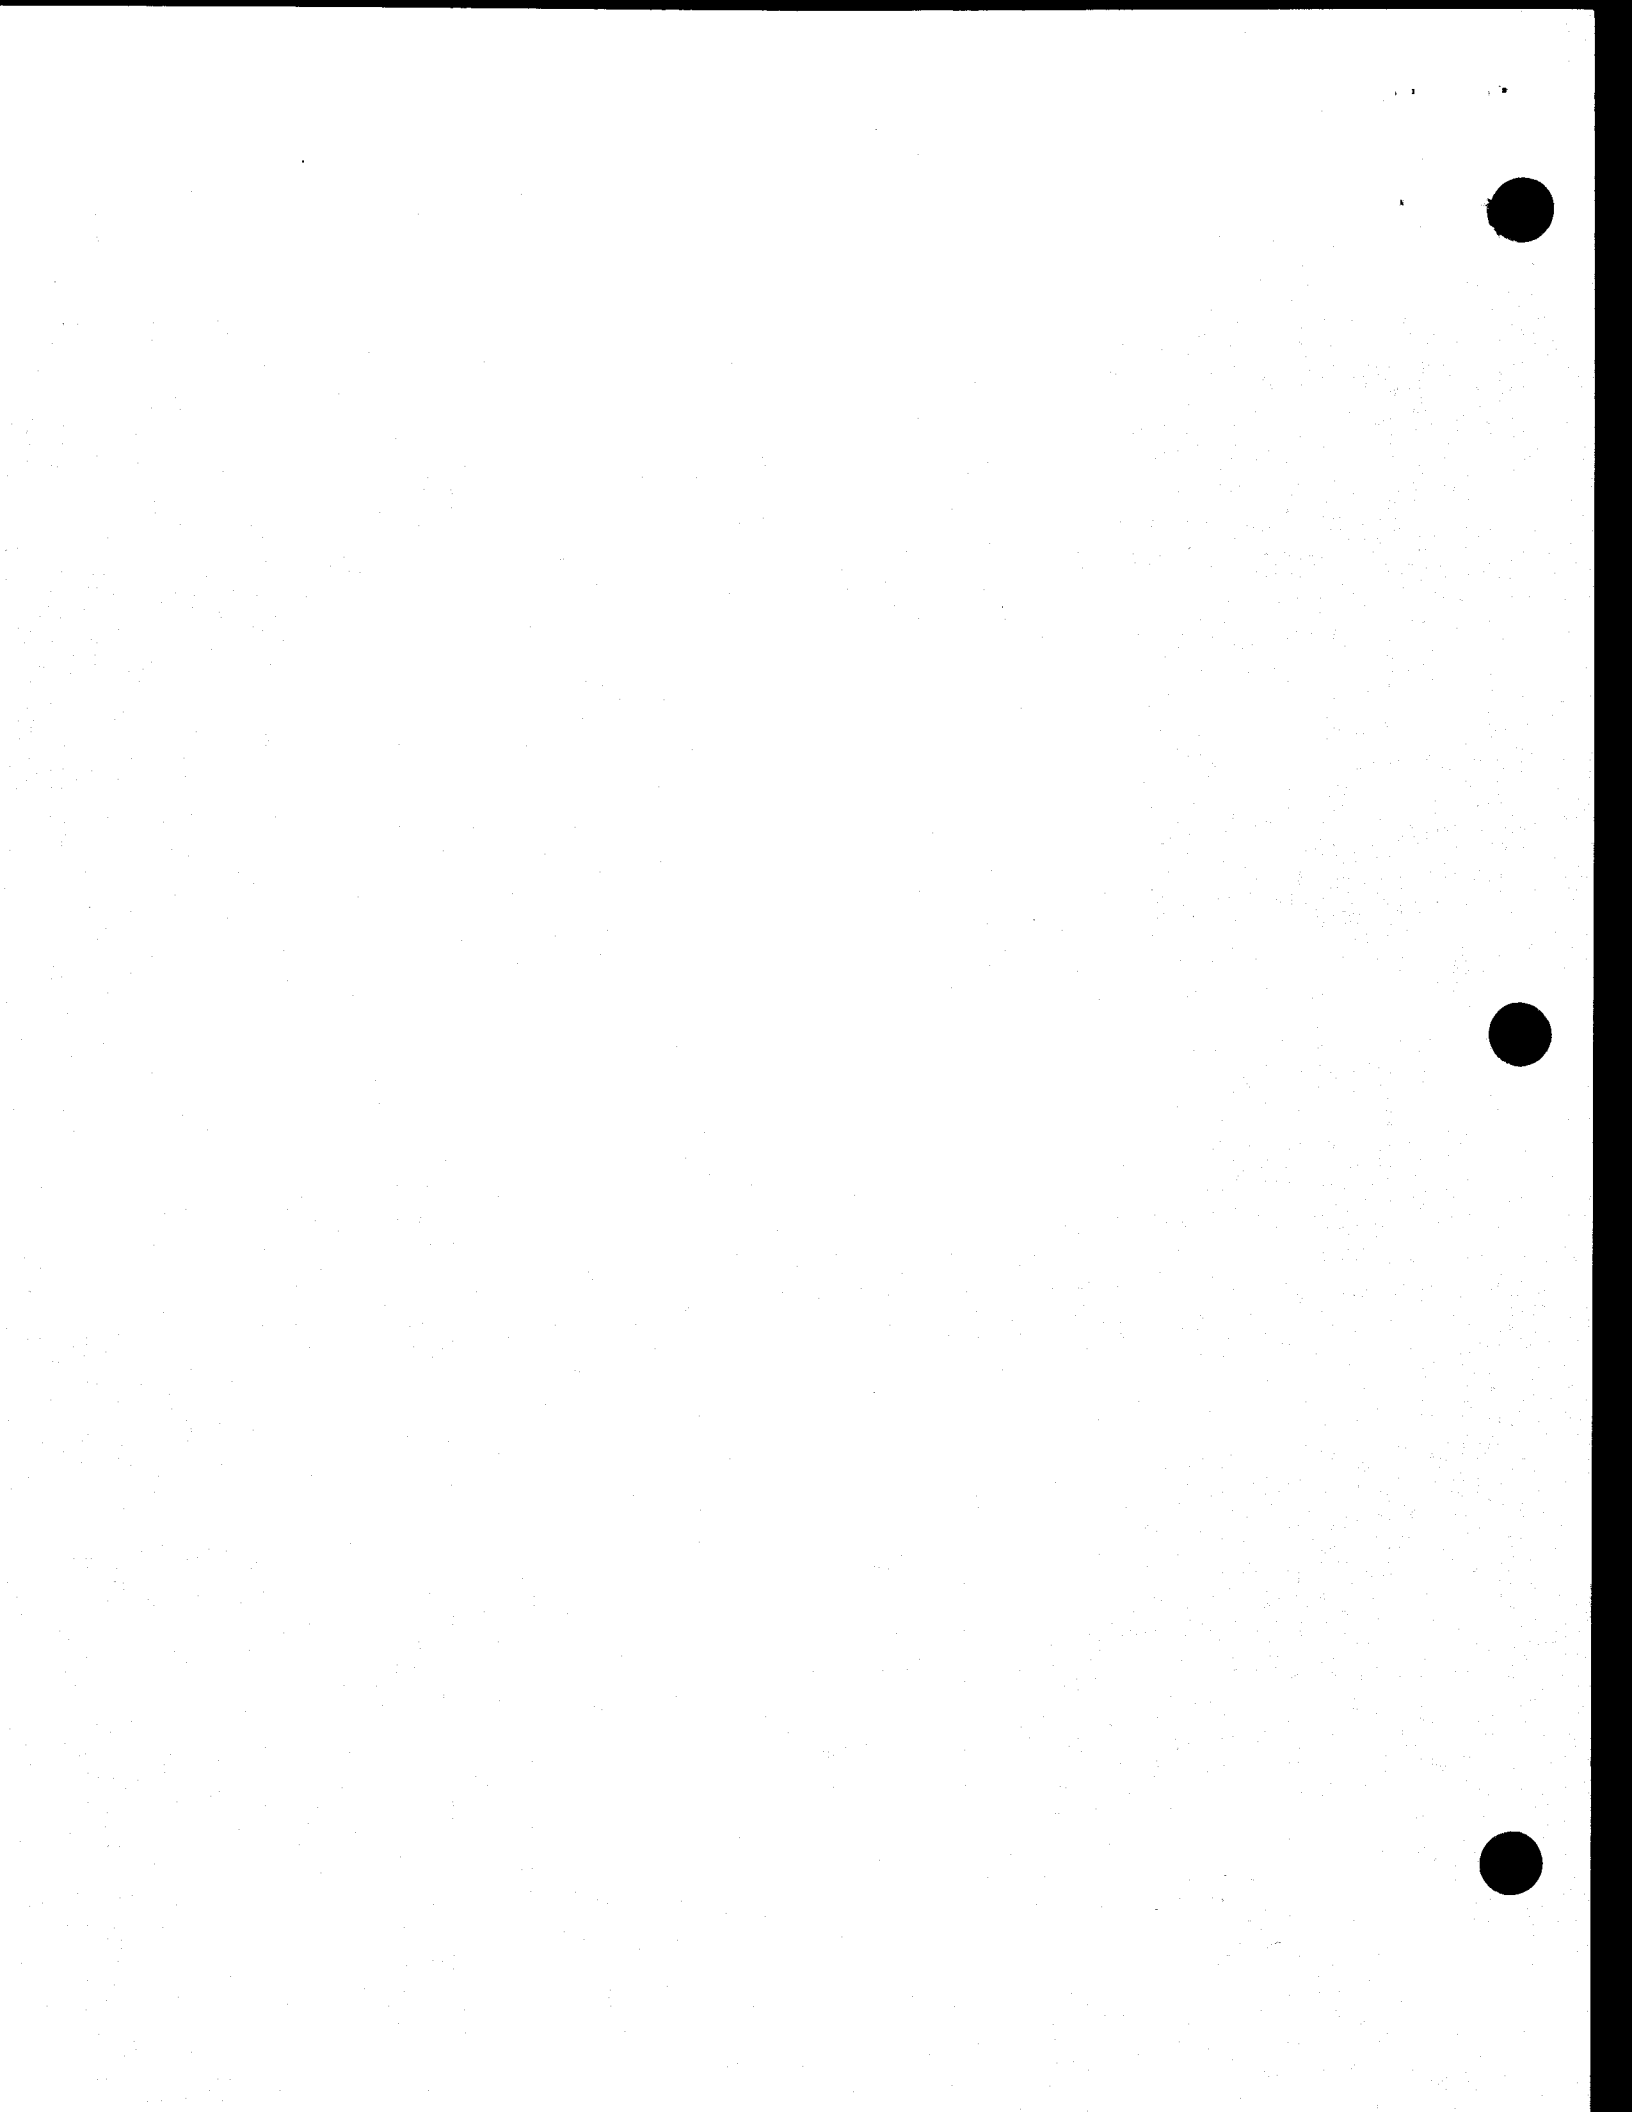



BANKERS INSURANCE COMPANY
11101 Roosevelt Blvd N, St. Petersburg Florida 33716
STATEMENT OF ASSETS, LIABILITIES, AND SURPLUS
at December 31, 2013

ASSETS	
Cash and Cash Equivalents.....	15,579,024
Debt Securities at Market Value.....	29,236,700
Mortgages and Notes Receivable.....	373,058
Equity Securities at Market Value.....	57,950,765
Other Invested Assets.....	3,503,346
Certificates of Deposit.....	8,884,274
Cash Held in Trust.....	
Accrued Investment Income.....	233,104
Premiums and Accounts Receivable.....	9,060,802
Amounts Held for Ceding Reinsurance.....	14,390,269
Reinsurance Loss Recoverable.....	367,488
Income Taxes Receivable-Current.....	2,593,507
Prepaid Reinsurance Premiums.....	
Income Taxes Receivable-Deferred.....	3,678,286
Equity in Underwriting Associations.....	26,249
Deferred Acquisition Costs.....	
Property/Equipment Net Depreciation.....	1,077,189
Intangible Assets.....	
Other Non-Current Assets.....	881,097
Accounts Receivable Affiliated.....	205,785
TOTAL ASSETS	148,040,944
Reserve for Losses and ALAE.....	47,743,604
Unearned Premium Reserves.....	31,815,860
Amounts Held/Due Reinsurers.....	2,213,765
Accrued Expenses/Other Liabilities.....	6,887,897
Accounts Payable.....	
Income Taxes Payable-Current.....	72,160
Accounts Payable Affiliated.....	396,607
TOTAL LIABILITIES	89,129,893
Common Stock.....	4,500,000
Additional Paid in Capital.....	40,205,898
Contributed Capital/Surplus Notes.....	5,000,000
Unassigned Funds (Surplus).....	9,205,153
TOTAL POLICYHOLDERS' SURPLUS	58,911,051
TOTAL LIABILITIES AND POLICYHOLDERS' SURPLUS	148,040,944

I, Wilbur L. Martin IV, President of BANKERS INSURANCE COMPANY, certify that the foregoing is a fair statement of Assets, Liabilities, Surplus and Other Funds of this Company, at the close of business, December 31, 2013, as reflected by its books and records and as reported in its statement on file with the Insurance Department of the State of Florida.

IN TESTIMONY WHEREOF, I have set my hand and affixed the seal of the Company,
this 20th day of March, 2014.

BANKERS INSURANCE COMPANY

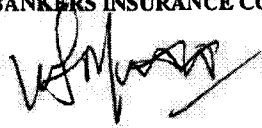

State of New York

DEPARTMENT OF FINANCIAL SERVICES

WHEREAS IT APPEARS THAT

Bankers Insurance Company


Home Office Address St. Petersburg, Florida

Organized under the Laws of Florida

has complied with the necessary requirements of or pursuant to law, it is hereby

licensed to do within this State the business of

accident and health, fire, miscellaneous property, water damage, burglary and theft, glass, elevator, collision, personal injury liability, property damage liability, workers' compensation and employers' liability, fidelity and surety, credit, motor vehicle and aircraft physical damage, marine and inland marine(inland only) and service contract reimbursement insurance, as specified in paragraph(s) 3, 4, 5, 6, 7, 8, 10, 12, 13, 14, 15, 16, 17, 19, 20 and 28 of Section 1113(a) of the New York Insurance Law to the extent permitted by certified copy of its charter document on file in this Department until July 1, 2014.

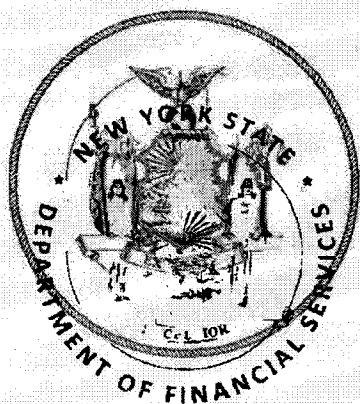

In Witness Whereof, I have hereunto set my hand and affixed the official seal of this Department at the City of Albany, New York, this 1st day of July, 2013

Benjamin M. Lawsky
Superintendent

By *Jacqueline Catalfamo*

Jacqueline Catalfamo
Special Deputy Superintendent



CERTIFICATE OF SOLVENCY UNDER SECTION 1111 OF THE NEW YORK
INSURANCE LAW

STATE OF NEW YORK
DEPARTMENT OF FINANCIAL SERVICES

It is hereby certified that

BANKERS INSURANCE COMPANY

Of St. Petersburg, Florida

a corporation organized under the laws of the State of Florida and duly authorized to transact the business of insurance in this State, is qualified to become surety or guarantor on all bonds, undertakings, recognizances, guaranties and other obligations required or permitted by law; and that the said corporation is possessed of a capital and surplus including gross paid-in and contributed surplus and unassigned funds (surplus) aggregating the sum of \$49,907,601 (Capital \$4,500,000) as is shown by its sworn financial statement for the Third Quarter of September 30, 2012, on file in this Department, prior to audit.

The said corporation cannot lawfully expose itself to loss on any one risk or hazard to an amount exceeding 10% of its surplus to policyholders, unless it shall be protected in excess of that amount in the manner provided in Section 4118 of the Insurance Law of this State.



In Witness Whereof, I have here-
unto set my hand and affixed the
official seal of this Department
at the City of Albany, this 11th
day of December, 2012

Benjamin M. Lawsby
Superintendent

By *Jacqueline Catalfamo*

Jacqueline Catalfamo
Special Deputy Superintendent



Performance Bond #1 (Pages 90 to 93): Use if the total contract price is \$5 Million Or Less. Performance Bond #1 has been approved by the U.S. Small Business Administration ("SBA") for participation in its Bond Guarantee Program.

PERFORMANCE BOND #1 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, _____, before me personally came _____ to me known, who, being by me duly sworn did depose and say that he resides at _____ that he is the _____ of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

* * * * *

Affix Acknowledgments and Justification of Sureties

Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 1)

PERFORMANCE BOND #2

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

hereinafter referred to as the "Principal", and _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

(\$ _____) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page2)

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns, shall well and faithfully perform the said Contract and all modifications, amendments, additions and alterations thereto that may hereafter be made, according to its terms and its true intent and meaning, including repair and or replacement of defective work and guarantees of maintenance for the periods stated in the Contract, and shall fully indemnify and save harmless the City from all cost and damage which it may suffer by reason of the Principal's default of the Contract, and shall fully reimburse and repay the City for all outlay and expense which the City may incur in making good any such default and shall protect the said City of New York against, and pay any and all amounts, damages, cost and judgments which may or shall be recovered against said City or its officers or agents or which the said City of New York may be called upon to pay any person or corporation by reason of any damages arising or growing out of the Principal's default of the Contract, then this obligation shall be null and void, otherwise to remain in full force and effect.

The Surety (Sureties), for value received, hereby stipulates and agrees, upon written notice from the City that the City has determined that the Principal is in default of the Contract, to either (1) pay the full amount of the above penal sum in complete discharge and exoneration of this bond and of all the liabilities of the Surety relating to this bond, or (2) fully perform and complete the Work to be performed under the Contract, pursuant to the terms, conditions, and covenants thereof. The Surety (Sureties) further agrees, at its option, either to tender the penal sum or to commence and diligently perform the Work specified in the Contract, including physical site work, within twenty-five (25) business days after written notice thereof from the City and to complete all Work within the time set forth in the Contract or such other time as agreed to between the City and Surety in accordance with the Contract. The Surety and the City reserve all rights and defenses each may have against the other; provided, however, that the Surety expressly agrees that its reservation of rights shall not provide a basis for non-performance of its obligation to commence and to complete all Work as provided herein.

The Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties) and its bond shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or to the said Contract or the Work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any Work to be performed or any moneys due or to become due thereunder; and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done by or in relation to said Principal.

Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this _____ day of _____, _____.

(Seal) _____ (L.S.)
Principal

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

Bond Premium Rate _____

Bond Premium Cost _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Performance Bond #2 (Pages 94 to 97): Use if the total contract price is more than \$5 Million.

PERFORMANCE BOND #2 (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, 20____ before me personally came _____ to me known, who, being by me duly sworn did depose and say that he/she resides at _____; that he/she is the _____ of _____ the corporation described in and which executed the foregoing instrument; and that he signed his name to the foregoing instrument by order of the directors of said corporation as the duly authorized and binding act thereof.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, 20____ before me personally came _____ to me known, who, being by me duly sworn did depose and say that he/she resides at _____; that he/she is _____ partner of _____, a limited/general partnership existing under the laws of the State of _____, the partnership described in and which executed the foregoing instrument; and that he/she signed his/her name to the foregoing instrument as the duly authorized and binding act of said partnership.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, 20____ before me personally came _____ to me known, who, being by me duly sworn did depose and say that he/she resides at _____, and that he/she is the individual whose name is subscribed to the within instrument and acknowledged to me that by his/her signature on the instrument, said individual executed the instrument.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

* * * * *

Affix Acknowledgments and Justification of Sureties.

Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 1)

PAYMENT BOND

KNOW ALL PERSONS BY THESE PRESENTS, That we, _____

hereinafter referred to as the "Principal", and _____

hereinafter referred to as the "Surety" ("Sureties") are held and firmly bound to THE CITY OF NEW YORK, hereinafter referred to as the "City" or to its successors and assigns, in the penal sum of

(\$_____) Dollars, lawful money of the United States, for the payment of which said sum of money well and truly to be made, we, and each of us, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal is about to enter, or has entered, into a Contract in writing with the City for

a copy of which Contract is annexed to and hereby made a part of this bond as though herein set forth in full;

NOW, THEREFORE, the conditions of this obligation are such that if the Principal, his or its representatives or assigns and other Subcontractors to whom Work under this Contract is sublet and his or their successors and assigns shall promptly pay or cause to be paid all lawful claims for

(a) Wages and compensation for labor performed and services rendered by all persons engaged in the prosecution of the Work under said Contract, and any amendment or extension thereof or addition thereto, whether such persons be agents servants or employees of the Principal or any such Subcontractor, including all persons so

Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 2)

engaged who perform the work of laborers or mechanics at or in the vicinity of the site of the Project regardless of any contractual relationship between the Principal or such Subcontractors, or his or their successors or assigns, on the one hand and such laborers or mechanics on the other, but not including office employees not regularly stationed at the site of the project; and

(b) Materials and supplies (whether incorporated in the permanent structure or not), as well as teams, fuels, oils, implements or machinery furnished, used or consumed by said Principal or any subcontractor at or in the vicinity of the site of the Project in the prosecution of the Work under said Contract and any amendment or extension thereof or addition thereto; then this obligation shall be void, otherwise to remain in full force and effect.

This bond is subject to the following additional conditions, limitations and agreements:

(a) The Principal and Surety (Sureties) agree that this bond shall be for the benefit of any materialmen or laborer having a just claim, as well as the City itself.

(b) All persons who have performed labor, rendered services or furnished materials and supplies, as aforesaid, shall have a direct right of action against the Principal and his, its or their successors and assigns, and the Surety (Sureties) herein, or against either or both or any of them and their successors and assigns. Such persons may sue in their own name, and may prosecute the suit to judgment and execution without the necessity of joining with any other persons as party plaintiff.

(c) The Principal and Surety (Sureties) agree that neither of them will hold the City liable for any judgment for costs of otherwise, obtained by either or both of them against a laborer or materialman in a suit brought by either a laborer or materialman under this bond for moneys allegedly due for performing work or furnishing material.

(d) The Surety (Sureties) or its successors and assigns shall not be liable for any compensation recoverable by an employee or laborer under the Workmen's Compensation Law.

(e) In no event shall the Surety (Sureties), or its successors or assigns, be liable for a greater sum than the penalty of this bond or be subject to any suit, action or proceeding hereon that is instituted by any person, firm, or corporation hereunder later than two years after the complete performance of said Contract and final settlement thereof.

The Principal, for himself and his successors and assigns, and the Surety (Sureties), for itself and its successors and assigns, do hereby expressly waive any objection that might be interposed as to the right of the City to require a bond containing the foregoing provisions, and they do hereby further expressly waive any defense which they or either of them might interpose to an action brought hereon by any person, firm or corporation, including subcontractors, materialmen and third persons, for work, labor, services, supplies or material performed rendered, or furnished as aforesaid upon the ground that there is no law authorizing the City to require the foregoing provisions to be placed in this bond.

And the Surety (Sureties), for value received, for itself and its successors and assigns, hereby stipulates and agrees that the obligation of said Surety (Sureties), and its bonds shall be in no way impaired or affected by any extension of time, modification, omission, addition, or change in or of the said Contract or the work to be performed thereunder, or by any payment thereunder before the time required therein, or by any waiver of any provisions thereof, or by any assignment, subletting or other transfer thereof or of any part thereof, or of any Work to be performed, or any moneys due to become due thereunder and said Surety (Sureties) does hereby waive notice of any and all of such extensions, modifications, omissions, additions, changes, payments, waivers, assignments, subcontracts and transfers, and hereby expressly stipulates and agrees that any and all things done and omitted to be done by and in relation to assignees, Subcontractors, and other transferees shall have the same effect as to said Surety (Sureties) as though done or omitted to be done or in relation to said Principal.

Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 3)

IN WITNESS WHEREOF, the Principal and the Surety (Sureties) have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereunto affixed and these presents to be signed by their proper officers, this _____ day of _____, _____.

(Seal) _____ (L.S.)
Principal

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

(Seal) _____
Surety

By: _____

If the Contractor (Principal) is a partnership, the bond should be signed by each of the individuals who are partners.

If the Contractor (Principal) is a corporation, the bond should be signed in its correct corporate name by a duly authorized officer, agent, or attorney-in-fact.

There should be executed an appropriate number of counterparts of the bond corresponding to the number of counterparts of the Contract.

Payment Bond (Pages 98 to 101): Use for any contract for which a Payment Bond is required.

PAYMENT BOND (Page 4)

ACKNOWLEDGMENT OF PRINCIPAL, IF A CORPORATION

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally came _____ to me known, who, being by me duly sworn did depose and say that he resides at _____ that he is the _____ of the corporation described in and which executed the foregoing instrument; that he knows the seal of said corporation; that one of the seals affixed to said instrument is such seal; that it was so affixed by order of the directors of said corporation, and that he signed his name thereto by like order.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF A PARTNERSHIP

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____ to me known, and known to me to be one of the members of the firm of _____ described in and who executed the foregoing instrument; and he acknowledged to me that he executed the same as and for the act and deed of said firm.

Notary Public or Commissioner of Deeds

ACKNOWLEDGMENT OF PRINCIPAL, IF AN INDIVIDUAL

State of _____ County of _____ ss:

On this _____ day of _____, _____ before me personally appeared _____ to me known, and known to me to be the person described in and who executed the foregoing instrument; and acknowledged that he executed the same.

Notary Public or Commissioner of Deeds

Each executed bond should be accompanied by: (a) appropriate acknowledgments of the respective parties; (b) appropriate duly certified copy of Power of Attorney or other certificate of authority where bond is executed by agent, officer or other representative of Principal or Surety; (c) a duly certified extract from By-Laws or resolutions of Surety under which Power of Attorney or other certificate of authority of its agent, officer or representative was issued, and (d) certified copy of latest published financial statement of assets and liabilities of Surety.

* * * * *

Affix Acknowledgments and Justification of Sureties

THIS PAGE LEFT BLANK

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

LABOR LAW §220 PREVAILING WAGE SCHEDULE

Workers, Laborers and Mechanics employed on a public work project must receive not less than the prevailing rate of wage and benefits for the classification of work performed by each upon such public work. Pursuant to Labor Law §220 the Comptroller of the City of New York has promulgated this schedule solely for Workers, Laborers and Mechanics engaged by private contractors on New York City public work contracts.

Contracting agencies anticipating doing work which requires the employment of a trade or classification not included in this schedule must request the Comptroller to establish a proper classification for the work pursuant to Labor Law §220 (3-a) (a). The prevailing rate schedule as promulgated by the Comptroller, must, in compliance with law, be annexed to and form part of the contract.

Contractors are solely responsible for maintaining original payroll records which delineate, among other things, the hours each employee worked within a given classification. Contractors using rates and/or classifications not promulgated by the Comptroller do so at their own risk. Additionally, prior to bid, Agency Chief Contracting Officers must contact the Bureau of Labor Law when the need arises for a work classification not published in this schedule.

The appropriate schedule of prevailing wages and benefits must be posted at all public work sites pursuant to Labor Law §220 (3-a) (a).

This schedule is applicable for work performed during the effective period, unless otherwise noted. You will be notified of any changes to this schedule by addenda published on our web site at www.comptroller.nyc.gov. The rate of wages and supplemental benefits to be paid or provided are those that prevail at the time the work is being performed. Preliminary schedules for future one-year periods are published annually in the City Record on or about June 1st of each succeeding year. Final schedules are published on or about July 1st in the City Record and on our web site at www.comptroller.nyc.gov.

The Comptroller's Office has attempted to include all overtime, shift and night differential, Holiday, Saturday, Sunday or other premium time work. However, this schedule does not set forth every prevailing practice with respect to such rates with which employers must comply. All such practices are nevertheless part of the employer's prevailing wage obligation and contained in the collective bargaining agreements of the prevailing wage unions. These collective bargaining agreements are available for inspection by appointment. Requests for appointments may be made by calling (212) 669-4443, Monday through Friday between the hours of 9 a.m. and 5 p.m.

Answers to questions concerning prevailing trade practices may be obtained from the Classification Unit by calling (212) 669-7974. Please direct all other compliance issues to: Bureau of Labor Law, Attn: Wasyl Kinach, P.E., Office of the Comptroller, 1 Centre Street, Room 1122, New York, N.Y. 10007; Fax (212) 669-4002.

Prevailing rates and ratios for apprentices are attached to this schedule in the Appendix. Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant, registered with the New York State Department of Labor, may be employed on a public work project. Workers who are not journey persons or not registered apprentices pursuant to Labor Law §220 (3-e) may not be substituted for apprentices and must be paid as journey persons.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Contractors are advised to review the applicable Collective Bargaining Agreements and the Comptroller's Prevailing Wage Schedule before bidding on Public Work. If there are any questions concerning prevailing wages, benefits, overtime, Holiday pay, shift differentials or any prevailing practice, please contact this office.

Public Work construction, reconstruction, demolition, excavation, rehabilitation, repair, renovation, alteration, or improvement contracts awarded pursuant to a Project Labor Agreement ("PLA") in accordance with Labor Law section 222 may have different labor standards for shift, premium and overtime work. Please refer to the PLA's pre-negotiated labor agreements for wage and benefit rates applicable to work performed outside of the regular workday. More information is available at the Mayor's Office of Contract Services (MOCS) web page at <http://www.nyc.gov/html/mocs/html/vendors/pla.shtml>.

All the provisions of Labor Law section 220 remain applicable to PLA work including, but not limited to, the enforcement of prevailing wage requirements by the Comptroller; however, we will enforce shift, premium, overtime and other non-standard rates as they appear in a project's pre-negotiated labor agreement.

Any error as to compensation under the prevailing wage law or other information as to trade classification, made by the contracting agency in the contract documents or in any other communication, will not preclude a finding against the contractor of prevailing wage violation.

In order to meet their obligation to provide prevailing supplemental benefits to each covered employee, employers must either:

- 1) Provide bona-fide benefits which cost the employer no less than the prevailing supplemental benefits rate; or
- 2) Supplement the employee's hourly wage by an amount no less than the prevailing supplemental benefits rate; or
- 3) Provide a combination of bona-fide benefits and wage supplements which cost the employer no less than the prevailing supplemental benefits rate in total.

Particular attention should be given to the supplemental benefits requirement. Although in most instances the payment or provision for supplemental benefits is for each hour worked, some classifications require the payment or provision of supplemental benefits for each hour paid. Consequently, some prevailing practices require benefits to be purchased at the overtime, shift differential, Holiday, Saturday, Sunday or other premium time rate.

Benefits are paid for EACH HOUR WORKED unless otherwise noted.

Wasył Kinach, P.E.
Director of Classifications
Bureau of Labor Law

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

220 SCHEDULE OF PREVAILING WAGES AND SUPPLEMENTAL BENEFITS ADDENDUM
EFFECTIVE PERIOD JANUARY 20, 2014 THROUGH JUNE 30, 2014

List of Amended Classifications

1. ASBESTOS HANDLER
2. BRICKLAYER
3. CARPENTER - BUILDING COMMERCIAL
4. CEMENT & CONCRETE WORKER
5. CORE DRILLER
6. ELECTRICIAN
7. FLOOR COVERER
8. HEAT AND FROST INSULATOR
9. HOUSE WRECKER
10. IRON WORKER - ORNAMENTAL
11. IRON WORKER - STRUCTURAL
12. MARBLE MECHANIC
13. MASON TENDER
14. MASON TENDER (INTERIOR DEMOLITION WORKER)
15. MOSAIC MECHANIC
16. PAINTER - STRUCTURAL STEEL
17. PLASTERER
18. PLASTERER - TENDER
19. PLUMBER
20. PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)
21. PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION)
22. PLUMBER: PUMP & TANK
23. ROOFER
24. STEAMFITTER
25. STEAMFITTER - REFRIGERATION AND AIR CONDITIONER
26. STONE MASON - SETTER
27. TILE FINISHER
28. TILE LAYER - SETTER

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER	6
BLASTER.....	6
BOILERMAKER.....	8
BRICKLAYER.....	9
CARPENTER - BUILDING COMMERCIAL.....	10
CARPENTER - HEAVY CONSTRUCTION WORK.....	11
CEMENT & CONCRETE WORKER.....	12
CEMENT MASON.....	13
CORE DRILLER.....	14
DERRICKPERSON AND RIGGER.....	15
DIVER.....	16
DOCKBUILDER - PILE DRIVER.....	17
DRIVER: TRUCK (TEAMSTER).....	18
ELECTRICIAN.....	20
ELECTRICIAN - ALARM TECHNICIAN.....	24
ELECTRICIAN-STREET LIGHTING WORKER.....	25
ELEVATOR CONSTRUCTOR.....	26
ELEVATOR REPAIR & MAINTENANCE.....	27
ENGINEER.....	27
ENGINEER - CITY SURVEYOR AND CONSULTANT.....	32
ENGINEER - FIELD (BUILDING CONSTRUCTION).....	33
ENGINEER - FIELD (HEAVY CONSTRUCTION).....	34
ENGINEER - FIELD (STEEL ERECTION).....	35
ENGINEER - OPERATING.....	36
FLOOR COVERER.....	44
GLAZIER.....	45
GLAZIER - REPAIR & MAINTENANCE.....	46
HEAT AND FROST INSULATOR.....	46
HOUSE WRECKER.....	47
IRON WORKER - ORNAMENTAL.....	48
IRON WORKER - STRUCTURAL.....	49
LABORER.....	50
LANDSCAPING.....	51
MARBLE MECHANIC.....	53
MASON TENDER.....	54
MASON TENDER (INTERIOR DEMOLITION WORKER).....	55
METALLIC LATHER.....	56
MILLWRIGHT.....	57
MOSAIC MECHANIC.....	58
PAINTER.....	59
PAINTER - SIGN.....	60
PAINTER - STRIPER.....	61

**OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE**

PAINTER - STRUCTURAL STEEL	62
PAPERHANGER.....	63
PAVER AND ROADBUILDER.....	63
PLASTERER.....	65
PLASTERER - TENDER.....	66
PLUMBER.....	67
PLUMBER (MECHNICAL EQUIPMENT AND SERVICE).....	68
PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION).....	68
PLUMBER: PUMP & TANK.....	69
POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING RENOVATION)	70
ROOFER	71
SANDBLASTER - STEAMBLASTER.....	72
SHEET METAL WORKER.....	72
SHEET METAL WORKER - SPECIALTY	73
SIGN ERECTOR	74
STEAMFITTER	75
STEAMFITTER - REFRIGERATION AND AIR CONDITIONER	77
STONE MASON - SETTER	79
TAPER	80
TELECOMMUNICATION WORKER.....	81
TILE FINISHER.....	82
TILE LAYER - SETTER	83
TIMBERPERSON.....	83
TUNNEL WORKER.....	84
WELDER.....	86

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

ASBESTOS HANDLER

(Hazardous Material; Disturbs, removes, encapsulates, repairs, or encloses friable asbestos material)

Asbestos Handler

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$35.90**

Supplemental Benefit Rate per Hour: **\$15.05**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$36.00**

Supplemental Benefit Rate per Hour: **\$15.45**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Sunday.

Time and one half the regular hourly rate after 40 hours in any work week.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Easter

Paid Holidays

None

(Local #78 and Local #12A)

BLASTER

Blaster

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$44.40**

Supplemental Benefit Rate per Hour: **\$38.44**

Blaster (Hydraulic)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$45.17
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Trac Drill Hydraulic

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$40.04
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Wagon: Air Trac: Quarry Bar: Drillrunners

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$39.30
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Operators of Jack Hammers

Chippers: Spaders: Concrete Breakers: and all other pneumatic tools of like usage: Walk Behind Self Propelled Hydraulic Asphalt and Concrete Breakers: Hydro (Water) Demolition

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$38.32
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Powder Carriers

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$34.66
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Hydraulic Trac Drill Chuck Tender

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$33.46
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Chuck Tender & Nipper

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$32.75
Supplemental Benefit Rate per Hour: \$38.44

Blaster - Magazine Keepers: (Watch Person)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$19.76
Supplemental Benefit Rate per Hour: \$38.44

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Description

Magazine Keepers:

Time and one half for work performed in excess of forty (40) hours per week and for work performed on Saturdays, Sundays and Holidays.

All Other Employees:

Time and one-half for the first eight hours of work on Saturday and for Make-up Time. Double time for all hours over eight Monday through Friday (except make-up hours) and for all hours worked on Sunday and Holidays.

Overtime

Double time the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

A single shift shall be 8 hours plus an unpaid lunch, starting at 8:00 A.M (or between 6:00 A.M. and 10:00 A.M. on weekdays). When two (2) shifts are employed, each shift shall be 8 hours plus ½ hour unpaid lunch. When three (3) shifts are employed, each shift will work seven and one-half (7 ½) hours, but will be paid for eight (8) hours, since only one-half (½) hour is allowed for mealtime. When two (2) or more shifts are employed, single time will be paid for each shift. The first 8 hours of any and all work performed Monday through Friday inclusive of any off-shift shall be at the single time rate.

(Local #29)

BOILERMAKER

Boilermaker

Effective Period: 7/1/2013 - 12/31/2013

Wage Rate per Hour: \$49.47

Supplemental Benefit Rate per Hour: \$39.78

Supplemental Note: For time and one half overtime - \$59.08; For double overtime - \$78.37.

Effective Period: 1/1/2014 - 6/30/2014

Wage Rate per Hour: \$50.45

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$41.31**

Supplemental Note: For time and one half overtime - **\$61.37**; For double overtime - **\$81.43**.

Overtime Description

For Repair and Maintenance work:

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

For New Construction work:

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Quadruple time the regular rate for work on the following holiday(s).

Labor Day

Paid Holidays

Good Friday

Day after Thanksgiving

Day before Christmas

Day before New Year's Day

Shift Rates

When shifts are required, the first shift shall work eight (8) hours at the regular straight-time hourly rate. The second shift shall work seven and one-half (7 ½) hours and receive eight hours at the regular straight time hourly rate plus twenty-five cents (\$0.25) per hour. The third shift shall work seven (7) hours and receive eight hours at the regular straight time hourly rate plus fifty cents (\$0.50) per hour. A thirty (30) minute lunch period shall not be considered as time worked. Work in excess of the above shall be paid overtime at the appropriate new construction work or repair work overtime wage and supplemental benefit hourly rate.

(Local #5)

BRICKLAYER

Bricklayer

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$46.44**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$27.53

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$47.78

Supplemental Benefit Rate per Hour: \$28.03

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Overtime rates to be paid outside the regular scheduled work day.

(Bricklayer District Council)

CARPENTER - BUILDING COMMERCIAL

Building Commercial

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$48.08

Supplemental Benefit Rate per Hour: \$41.10

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$48.88

Supplemental Benefit Rate per Hour: \$42.70

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

The second shift will receive one hour at the double time rate of pay for the last hour of the shift; eight hours pay for seven hours of work, nine hours pay for eight hours of work. There must be a first shift in order to work a second shift.

(Carpenters District Council)

**CARPENTER - HEAVY CONSTRUCTION WORK
(Construction of Engineering Structures and Building Foundations)**

Heavy Construction Work

Effective Period: 7/1/2013 - 7/17/2013

Wage Rate per Hour: **\$46.74**

Supplemental Benefit Rate per Hour: **\$42.37**

Effective Period: 7/18/2013 - 6/30/2014

Wage Rate per Hour: **\$46.82**

Supplemental Benefit Rate per Hour: **\$44.97**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Carpenters District Council)

CEMENT & CONCRETE WORKER

Cement & Concrete Worker

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$42.33**

Supplemental Benefit Rate per Hour: **\$26.17**

Supplemental Note: \$28.92 on Saturdays; \$31.67 on Sundays & Holidays

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$42.38**

Supplemental Benefit Rate per Hour: **\$26.17**

Supplemental Note: \$28.92 on Saturdays; \$31.67 on Sundays & Holidays

Overtime Description

Time and one half the regular rate after 7 hour day (time and one half the regular rate after an 8 hour day when working with Dockbuilders on pile cap forms and for work below street level to the top of the foundation wall, not to exceed 2 feet or 3 feet above the sidewalk-brick shelf, when working on the foundation and structure.)

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day before Christmas Day
1/2 day before New Year's Day

Shift Rates

On shift work extending over a twenty-four hour period, all shifts are paid at straight time.

(Cement Concrete Workers District Council)

CEMENT MASON

Cement Mason

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$38.63

Supplemental Benefit Rate per Hour: \$39.05

Supplemental Note: Overtime supplemental benefit rate per hour: \$57.55

Overtime Description

Time and one-half the regular rate after an 8 hour day, double time the regular rate after 10 hours. Time and one-half the regular rate on Saturday, double time the regular rate after 10 hours. Double time the regular rate on Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

Shift Rates

For an off shift day, (work at times other than the regular 7:00 A.M. to 3:30 P.M. work day) a cement mason shall be paid at the regular hourly rate plus a 25% per hour differential. Four Days a week at Ten (10)hour day.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Local #780)

CORE DRILLER

Core Driller

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$35.44**
Supplemental Benefit Rate per Hour: **\$19.75**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$35.71**
Supplemental Benefit Rate per Hour: **\$21.69**

Core Driller Helper

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$28.60**
Supplemental Benefit Rate per Hour: **\$19.75**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$28.60**
Supplemental Benefit Rate per Hour: **\$21.69**

Core Driller Helper(Third year in the industry)

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$25.74**
Supplemental Benefit Rate per Hour: **\$19.75**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$25.74**
Supplemental Benefit Rate per Hour: **\$21.69**

Core Driller Helper (Second year in the industry)

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$22.88**
Supplemental Benefit Rate per Hour: **\$19.75**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$22.88**
Supplemental Benefit Rate per Hour: **\$21.69**

Core Driller Helper (First year in the industry)

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$20.02**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$19.75

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$20.02

Supplemental Benefit Rate per Hour: \$21.69

Overtime Description

Time and one half the regular rate for work on a holiday plus Holiday pay when worked.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Shift Rates

The shift day shall be the continuous eight and one-half (8½) hours from 6:00 A.M. to 2:30 P.M. and from 2:30 P.M. to 11:00 P.M., including one-half (½) hour of employees regular rate of pay for lunch. When two (2) or more shifts are employed, single time shall be paid for each shift, but those employees employed on a shift other than from 8:00 A.M. to 5:00 P.M. shall, in addition, receive seventy-five cents (\$0.75) per hour differential for each hour worked. When three (3) shifts are needed, each shift shall work seven and one-half (7 ½) hours paid for eight (8) hours of labor and be permitted one-half (½) hour for mealtime.

(Carpenters District Council)

DERRICKPERSON AND RIGGER

Derrick Person & Rigger

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$41.00

Supplemental Benefit Rate per Hour: \$46.07

Supplemental Note: The above supplemental rate applies for work performed in Manhattan, Bronx, Brooklyn and Queens. \$47.49 - For work performed in Staten Island.

Derrick Person & Rigger - Site Work

For site work where no rigging is involved.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$30.00

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$31.32**

Overtime Description

The first two hours of overtime on weekdays and the first seven hours of work on Saturdays are paid at time and one half for wages and supplemental benefits. All additional overtimes is paid at double time for wages and supplemental benefits. Deduct \$1.42 from the Staten Island hourly benefits rate before computing overtime.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

(Local #197)

DIVER

Diver (Marine)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$59.40**

Supplemental Benefit Rate per Hour: **\$44.97**

Diver Tender (Marine)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$42.05**

Supplemental Benefit Rate per Hour: **\$44.97**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

When three shifts are utilized each shift shall work seven and one half-hours (7 1/2 hours) and paid for 8 hours, allowing for one half hour for lunch.

(Carpenters District Council)

DOCKBUILDER - PILE DRIVER

Dockbuilder - Pile Driver

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$46.82

Supplemental Benefit Rate per Hour: \$44.97

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Carpenters District Council)

DRIVER: TRUCK (TEAMSTER)

Driver - Automobile Chauffeur (Dump Truck)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$38.11

Supplemental Benefit Rate per Hour: \$40.20

Driver - Heavy Equipment Trailer Driver

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.61

Supplemental Benefit Rate per Hour: \$40.20

Note: For time and one half overtime Wage Rate - \$57.16; for double time overtime Wage Rate - \$76.21

Driver - Euclid & Turnapull Operator

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$38.67

Supplemental Benefit Rate per Hour: \$40.20

Driver - Six Wheeler(3 Axle) Tractors & Trailers

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.11

Supplemental Benefit Rate per Hour: \$40.20

Note: For time and one half overtime Wage Rate - \$58.01; for double time overtime Wage Rate - \$77.34

Driver - Boom Truck

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.36

Supplemental Benefit Rate per Hour: \$40.20

Note: For time and one half overtime Wage Rate - \$58.01; for double time overtime Wage Rate - \$77.34

Overtime Description

For Paid Holidays: Holiday pay for all holidays shall be prorated based two hours per day for each day worked in the holiday week, not to exceed 8 hours of holiday pay. For Thanksgiving week, the prorated share shall be 5 1/3 hours of holiday pay for each day worked in Thanksgiving week.

Overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Driver - Redi-Mix Driver (Sand & Gravel)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$35.71

Supplemental Benefit Rate per Hour: \$37.27

Overtime Description

For Paid Holidays: Employees working two (2) days in the calendar week in which the holiday falls are to be paid for these holidays, provided they shape each remaining workday during that calendar week.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

President's Day
Columbus Day
Veteran's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Triple time the regular rate for work on the following holiday(s).

New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Thanksgiving Day
Christmas Day

(Local #282)

ELECTRICIAN

(Including all low voltage cabling carrying data; video; and voice in combination with data and or video.)

Electrician "A" (Regular Day)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$52.00
Supplemental Benefit Rate per Hour: \$46.13

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$53.00
Supplemental Benefit Rate per Hour: \$47.54

Electrician "A" (Regular Day Overtime)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$78.00
Supplemental Benefit Rate per Hour: \$49.39

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$79.50
Supplemental Benefit Rate per Hour: \$50.86

Electrician "A" (Day Shift)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$52.00
Supplemental Benefit Rate per Hour: \$46.13

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$53.00
Supplemental Benefit Rate per Hour: \$47.54

Electrician "A" (Day Shift Overtime After 8 hours)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$78.00
Supplemental Benefit Rate per Hour: \$49.39

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$79.50
Supplemental Benefit Rate per Hour: \$50.86

Electrician "A" (Swing Shift)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$61.01
Supplemental Benefit Rate per Hour: \$52.47

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$62.19
Supplemental Benefit Rate per Hour: \$54.07

Electrician "A" (Swing Shift Overtime After 7.5 hours)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$91.52
Supplemental Benefit Rate per Hour: \$56.30

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$93.29
Supplemental Benefit Rate per Hour: \$57.97

Electrician "A" (Graveyard Shift)

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$68.34
Supplemental Benefit Rate per Hour: \$57.83

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$69.66
Supplemental Benefit Rate per Hour: \$59.59

Electrician "A" (Graveyard Shift Overtime After 7 hours)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$102.51
Supplemental Benefit Rate per Hour: \$62.11

Effective Period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$104.49
Supplemental Benefit Rate per Hour: \$63.96

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on a holiday.
New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

When so elected by the Employer, one or more shifts of at least five days duration may be scheduled as follows:
Day Shift: 8:00 am to 4:30 pm, Swing Shift 4:30 pm to 12:30 am, Graveyard Shift: 12:30 am to 8:00 am.

For multiple shifts of temporary light and/or power, the temporary light and/or power employee shall be paid for 8 hours at the straight time rate. For three or less workers performing 8 hours temporary light and/or power the supplemental benefit rate is \$22.86 effective 1/20/2014 and \$23.63 effective 5/14/2014.

Electrician "M" (First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$26.50
Supplemental Benefit Rate per Hour: \$19.56
First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$25.80
First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$19.21
First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$22.00

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$17.30

Effective Period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$27.00

Supplemental Benefit Rate per Hour: \$20.32

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$26.30

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$19.96

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$22.50

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$18.06

Electrician "M" (Overtime After First 8 hours)

"M" rated work shall be defined as jobbing: electrical work of limited duration and scope, also consisting of repairs and/or replacement of electrical and tele-data equipment. Includes all work necessary to retrofit, service, maintain and repair all kinds of lighting fixtures and local lighting controls and washing and cleaning of foregoing fixtures.

Effective Period: 7/1/2013 - 5/13/2014

Wage Rate per Hour: \$39.75

Supplemental Benefit Rate per Hour: \$21.23

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$38.70

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$20.83

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$33.00

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$18.68

Effective Period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$40.50

Supplemental Benefit Rate per Hour: \$21.01

First and Second Year "M" Wage Rate Per Hour - Hired on or before 5/10/07: \$39.45

First and Second Year "M" Supplemental Rate- Hired on or before 5/10/07: \$21.61

First and Second Year "M" Wage Rate Per Hour - Hired after 5/10/07: \$33.75

First and Second Year "M" Supplemental Rate- Hired after 5/10/07: \$19.47

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Local #3)

ELECTRICIAN - ALARM TECHNICIAN

(Scope of Work - Inspect, test, repair, and replace defective, malfunctioning, or broken devices, components and controls of Fire, Burglar and Security Systems)

Alarm Technician

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$30.40**

Supplemental Benefit Rate per Hour: **\$13.90**

Supplemental Note: \$12.40 only after 8 hours worked in a day

Overtime Description

Time and one half the regular rate for work on the following holidays: Columbus Day, Veterans Day, Day after Thanksgiving.

Double time the regular rate for work on the following holidays: New Year's day, Martin Luther King Jr. Day, President's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day, Christmas Day.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

Night Differential is based upon a ten percent (10%) differential between the hours of 4:00 P.M. and 12:30 A.M. and a fifteen percent (15%) differential for the hours 12:00 A.M. to 8:00 A.M.

Vacation

At least 1 year of employment.....ten (10) days
5 years or more of employment.....fifteen (15) days
10 years of employment.....twenty (20) days

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Plus one Personal Day per year

Sick Days:
One day per Year

(Local #3)

ELECTRICIAN-STREET LIGHTING WORKER

Electrician - Electro Pole Electrician

Effective Period: 7/1/2013 - 5/20/2014
Wage Rate per Hour: **\$52.00**
Supplemental Benefit Rate per Hour: **\$47.90**

Effective Period: 5/21/2014 - 6/30/2014
Wage Rate per Hour: **\$53.00**
Supplemental Benefit Rate per Hour: **\$49.34**

Electrician - Electro Pole Foundation Installer

Effective Period: 7/1/2013 - 5/20/2014
Wage Rate per Hour: **\$39.42**
Supplemental Benefit Rate per Hour: **\$36.46**

Effective Period: 5/21/2014 - 6/30/2014
Wage Rate per Hour: **\$40.18**
Supplemental Benefit Rate per Hour: **\$37.73**

Electrician - Electro Pole Maintainer

Effective Period: 7/1/2013 - 5/20/2014
Wage Rate per Hour: **\$33.75**
Supplemental Benefit Rate per Hour: **\$32.83**

Effective Period: 5/21/2014 - 6/30/2014
Wage Rate per Hour: **\$34.40**
Supplemental Benefit Rate per Hour: **\$34.00**

Overtime Description

Electrician - Electro Pole Electrician: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week.

Electrician - Electro Pole Foundation Installer: Time and one half the regular rate after 8 hours within a 24 hour period and Saturday and Sunday.

Electrician - Electro Pole Maintainer: Time and one half the regular rate after a 7 hour day and after 5 consecutive days worked per week. Saturdays and Sundays may be used as a make-up day at straight time when a day is lost during the week to inclement weather.

Overtime Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #3)

ELEVATOR CONSTRUCTOR

Elevator Constructor

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$57.01

Supplemental Benefit Rate per Hour: \$34.48

Overtime Description

For New Construction: work performed after 7 or 8 hour day, Saturday, Sunday or between 4:30pm and 7:00am shall be paid at double time rate.

Existing buildings: work performed after an 8 hour day, Saturday, Sunday or between 5:30pm and 7:00 am shall be paid time and one half.

Overtime

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Vacation

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ELEVATOR REPAIR & MAINTENANCE

Elevator Service/Modernization Mechanic

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$45.14**

Supplemental Benefit Rate per Hour: **\$33.02**

Overtime Description

For Service Work: Double time - all work performed on Sundays, Holidays, and between midnight and 7:00am.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

For Modernization Work (4pm to 12:30am) - regularly hourly rate plus a (15%) fifteen percent differential.

Vacation

Employer contributes 8% of regular basic hourly rate as vacation pay for employees with more than 15 years of service, and 6% for employees with 5 to 15 years of service, and 4% for employees with less than 5 years of service.

(Local #1)

ENGINEER

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Engineer - Heavy Construction Operating Engineer I

Cherrypickers 20 tons and over and Loaders (rubber tired and/or tractor type with a manufacturer's minimum rated capacity of six cubic yards and over).

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$61.05

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$97.68

Engineer - Heavy Construction Operating Engineer II

Backhoes, Basin Machines, Groover, Mechanical Sweepers, Bobcat, Boom Truck, Barrier Transport (Barrier Mover) & machines of similar nature. Operation of Churn Drills and machines of a similar nature, Stetco Silent Hoist and machines of similar nature, Vac-Alls, Meyers Machines, John Beam and machines of a similar nature, Ross Carriers and Travel Lifts and machines of a similar nature, Bulldozers, Scrapers and Turn-a-Pulls: Tugger Hoists (Used exclusively for handling excavated material); Tractors with attachments, Hyster and Roustabout Cranes, Cherrypickers. Austin Western, Grove and machines of a similar nature, Scoopmobiles, Monorails, Conveyors, Trenchers: Loaders-Rubber Tired and Tractor: Barber Greene and Eimco Loaders and Eimco Backhoes; Mighty Midget and similar breakers and Tampers, Curb and Gutter Pavers and Motor Patrol, Motor Graders and all machines of a similar nature. Locomotives 10 Tons or under. Mini-Max, Break-Tech and machines of a similar nature; Milling machines, robotic and demolition machines and machines of a similar nature, shot blaster, skid steer machines and machines of a similar nature including bobcat, pile rig rubber-tired excavator (37,000 lbs. and under), 2 man auger.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$59.24

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$94.78

Engineer - Heavy Construction Operating Engineer III

Minor Equipment such as Tractors, Post Hole Diggers, Ditch Witch (Walk Behind), Road Finishing Machines, Rollers five tons and under, Tugger Hoists, Dual Purpose Trucks, Fork Lifts, and Dempsey Dumpers, Fireperson.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$56.22

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$89.95

Engineer - Heavy Construction Maintenance Engineer I

Installing, Repairing, Maintaining, Dismantling and Manning of all equipment including Steel Cutting, Bending and Heat Sealing Machines, Mechanical Heaters, Grout Pumps, Bentonite Pumps & Plants, Screening Machines, Fusion Coupling Machines, Tunnel Boring Machines Moles and Machines of a similar nature, Power Packs, Mechanical Hydraulic Jacks; all drill rigs including but not limited to Churn, Rotary Caisson, Raised Bore & Drills of a similar nature; Personnel, Inspection & Safety Boats or any boats used to perform functions of same, Mine Hoists, Whirlies, all Climbing Cranes, all Tower Cranes, including but not limited to Truck Mounted and Crawler Type and machines of similar nature; Maintaining Hydraulic Drills and machines of a similar nature; Well Point System-Installation and dismantling; Burning, Welding, all Pumps regardless of size and/or motor power, except

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

River Cofferdam Pumps and Wells Point Pumps; Motorized Buggies (three or more); equipment used in the cleaning and televising of sewers, but not limited to jet-rodder/vacuum truck, vacall/vactor, closed circuit television inspection equipment; high powered water pumps, jet pumps; screed machines and concrete finishing machines of a similar nature; vermeers.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$58.97

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$94.35

Engineer - Heavy Construction Maintenance Engineer II

On Base Mounted Tower Cranes

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$77.30

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$123.68

Engineer - Heavy Construction Maintenance Engineer III

On Generators, Light Towers

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.10

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$62.56

Engineer - Heavy Construction Maintenance Engineer IV

On Pumps and Mixers including mud sucking

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$40.11

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$64.18

Engineer - Heavy Construction Oilers I

Gradalls, Cold Planer Grader, Concrete Pumps, Driving Truck Cranes, Driving and Operating Fuel and Grease Trucks.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$53.22

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Shift Wage Rate: \$85.15

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Engineer - Heavy Construction Oilers II

All gasoline, electric, diesel or air operated Shovels, Draglines, Backhoes, Keystones, Pavers, Guniting Machines, Battery of Compressors, Crawler Cranes, two-person Trenching Machines.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$36.97
Supplemental Benefit Rate per Hour: \$31.93
Supplemental Note: \$57.46 on overtime
Shift Wage Rate: \$59.15

Engineer - Steel Erection Maintenance Engineers

Derrick, Travelers, Tower, Crawler Tower and Climbing Cranes

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$57.05
Supplemental Benefit Rate per Hour: \$31.93
Supplemental Note: \$57.46 on overtime
Shift Wage Rate: \$91.28

Engineer - Steel Erection Oiler I

On a Truck Crane

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$53.43
Supplemental Benefit Rate per Hour: \$31.93
Supplemental Note: \$57.46 on overtime
Shift Wage Rate: \$85.49

Engineer - Steel Erection Oiler II

On a Crawler Crane

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$40.84
Supplemental Benefit Rate per Hour: \$31.93
Supplemental Note: \$57.46 on overtime
Shift Wage Rate: \$65.34

Overtime Description

On jobs of more than one shift, if the next shift employee fails to report for work through any cause over which the employer has no control, the employee on duty who works the next shift continues to work at the single time rate.

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Engineer - Building Work Maintenance Engineers I

Installing, repairing, maintaining, dismantling (of all equipment including: Steel Cutting and Bending Machines, Mechanical Heaters, Mine Hoists, Climbing Cranes, Tower Cranes, Linden Peine, Lorain, Liebherr, Mannes, or machines of a similar nature, Well Point Systems, Deep Well Pumps, Concrete Mixers with loading Device, Concrete Plants, Motor Generators when used for temporary power and lights), skid steer machines of a similar nature including bobcat.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$54.04**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

Engineer - Building Work Maintenance Engineers II

On Pumps, Generators, Mixers and Heaters

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$42.10**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

Engineer - Building Work Oilers I

All gasoline, electric, diesel or air operated Gradealls: Concrete Pumps, Overhead Cranes in Power Houses: Their duties shall be to assist the Engineer in oiling, greasing and repairing of all machines; Driving Truck Cranes: Driving and Operating Fuel and Grease Trucks, Cherrypickers (hydraulic cranes) over 70,000 GVW, and machines of a similar nature.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$51.40**

Supplemental Benefit Rate per Hour: **\$31.93**

Supplemental Note: **\$57.46** on overtime

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Engineer - Building Work Oilers II

Oilers on Crawler Cranes, Backhoes, Trenching Machines, Gunite Machines, Compressors (three or more in Battery).

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$38.31

Supplemental Benefit Rate per Hour: \$31.93

Supplemental Note: \$57.46 on overtime

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Shift Rates

Off Shift: double time the regular hourly rate.

(Local #15)

ENGINEER - CITY SURVEYOR AND CONSULTANT

Party Chief

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$35.55

Supplemental Benefit Rate per Hour: \$17.65

Instrument Person

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$29.41**
Supplemental Benefit Rate per Hour: **\$17.65**

Rodperson

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$25.54**
Supplemental Benefit Rate per Hour: **\$17.65**

Overtime Description

Overtime Benefit Rate - \$23.63 per hour (time & one half) \$29.95 per hour (double time).
Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (BUILDING CONSTRUCTION)
(Construction of Building Projects, Concrete Superstructures, etc.)

Field Engineer - BC Party Chief

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$55.40**
Supplemental Benefit Rate per Hour: **\$30.62**
Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

Field Engineer - BC Instrument Person

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$43.10**
Supplemental Benefit Rate per Hour: **\$30.62**
Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Field Engineer - BC Rodperson

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$27.96

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime Benefit Rate - \$42.73 per hour (time & one half) \$54.84 per hour (double time).

Overtime Description

Time and one half the regular rate after a 7 hour work and time and one half the regular rate for Saturday for the first seven hours worked, Double time the regular time rate for Saturday for work performed in excess of seven hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (HEAVY CONSTRUCTION)

(Construction of Roads, Tunnels, Bridges, Sewers, Building Foundations, Engineering Structures etc.)

Field Engineer - HC Party Chief

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$62.61

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

Field Engineer - HC Instrument Person

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$46.00

Supplemental Benefit Rate per Hour: \$30.62

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

Field Engineer - HC Rodperson

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$38.61**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

Overtime Description

Time and one half the regular rate after an 8 hour day, Time and one half the regular rate for Saturday for the first eight hours worked, Double time the regular time rate for Saturday for work performed in excess of eight hours, Double time the regular rate for Sunday and Double time the regular rate for work on a holiday.

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - FIELD (STEEL ERECTION)

Field Engineer - Steel Erection Party Chief

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$58.50**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

Field Engineer - Steel Erection Instrument Person

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$45.53**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

Field Engineer - Steel Erection Rodperson

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$30.43**

Supplemental Benefit Rate per Hour: **\$30.62**

Supplemental Note: Overtime benefit rate - \$42.73 per hour (time & one half), \$54.84 per hour (double time).

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime Description

Time and one half the regular rate for Saturday for the first eight hours worked.
Double time the regular rate for Saturday for work performed in excess of eight hours.

Overtime

Time and one half the regular rate after an 8 hour day.
Double time the regular rate for Sunday.
Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

(Operating Engineer Local #15-D)

ENGINEER - OPERATING

Operating Engineer - Road & Heavy Construction I

Back Filling Machines, Cranes, Mucking Machines and Dual Drum Paver.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$67.70

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: \$51.75 overtime hours

Shift Wage Rate: \$108.32

Operating Engineer - Road & Heavy Construction II

Backhoes, Power Shovels, Hydraulic Clam Shells, Steel Erection, Moles and machines of a similar nature.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$70.10

Supplemental Benefit Rate per Hour: \$28.60

Supplemental Note: 51.75 overtime hours

Shift Wage Rate: \$112.16

Operating Engineer - Road & Heavy Construction III

Mine Hoists, Cranes, etc. (Used as Mine Hoists)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$72.34
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$115.74

Operating Engineer - Road & Heavy Construction IV

Gradealls, Keystones, Cranes on land or water (with digging buckets), Bridge Cranes, Vermeer Cutter and machines of a similar nature, Trenching Machines.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$70.63
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$113.01

Operating Engineer - Road & Heavy Construction V

Pile Drivers & Rigs (employing Dock Builder foreperson): Derrick Boats, Tunnel Shovels.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$69.23
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$110.77

Operating Engineer - Road & Heavy Construction VI

Mixers (Concrete with loading attachment), Concrete Pavers, Cableways, Land Derricks, Power Houses (Low Air Pressure Units).

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$65.76
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$105.22

Operating Engineer - Road & Heavy Construction VII

Barrier Movers , Barrier Transport and Machines of a Similar Nature.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$53.08
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$84.93

Operating Engineer - Road & Heavy Construction VIII

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Utility Compressors

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$41.18
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$51.93

Operating Engineer - Road & Heavy Construction IX

Horizontal Boring Rig

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$62.53
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$100.05

Operating Engineer - Road & Heavy Construction X

Elevators (manually operated as personnel hoist).

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$57.46
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$91.94

Operating Engineer - Road & Heavy Construction XI

Compressors (Portable 3 or more in battery), Driving of Truck Mounted Compressors, Well-point Pumps, Tugger Machines Well Point Pumps, Churn Drill.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$44.63
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$71.41

Operating Engineer - Road & Heavy Construction XII

All Drills and Machines of a similar nature.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$66.45
Supplemental Benefit Rate per Hour: \$28.60
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: \$106.32

Operating Engineer - Road & Heavy Construction XIII

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Concrete Pumps, Concrete Plant, Stone Crushers, Double Drum Hoist, Power Houses (other than above).

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$64.34**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$102.94**

Operating Engineer - Road & Heavy Construction XIV

Concrete Mixer

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$61.53**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$98.45**

Operating Engineer - Road & Heavy Construction XV

Compressors (Portable Single or two in Battery, not over 100 feet apart), Pumps (River Cofferdam) and Welding Machines, Push Button Machines, All Engines Irrespective of Power (Power-Pac) used to drive auxiliary equipment, Air, Hydraulic, etc.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$41.44**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$66.30**

Operating Engineer - Road & Heavy Construction XVI

Concrete Breaking Machines, Hoists (Single Drum), Load Masters, Locomotives (over ten tons) and Dinkies over ten tons, Hydraulic Crane-Second Engineer.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$58.74**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.85** overtime hours

Shift Wage Rate: **\$93.98**

Operating Engineer - Road & Heavy Construction XVII

On-Site concrete plant engineer, On-site Asphalt Plant Engineer, and Vibratory console.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$59.21**

Supplemental Benefit Rate per Hour: **\$28.60**

Supplemental Note: **\$51.75** overtime hours

Shift Wage Rate: **\$94.74**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Operating Engineer - Road & Heavy Construction XVIII

Tower Crane

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$85.00**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: **\$136.00**

Operating Engineer - Paving I

Asphalt Spreaders, Autogrades (C.M.I.), Roto/Mil

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$65.76**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: **\$105.22**

Operating Engineer - Paving II

Asphalt Roller

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$64.04**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: **\$102.46**

Operating Engineer - Paving III

Asphalt Plants

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$54.17**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours
Shift Wage Rate: **\$86.67**

Operating Engineer - Concrete I

Cranes

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$70.32**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours

Operating Engineer - Concrete II

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Compressors

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$41.76**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Concrete III

Micro-traps (Negative Air Machines), Vac-All Remediation System.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$56.16**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Steel Erection I

Three Drum Derricks

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$73.37**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours
Shift Wage Rate: **\$117.39**

Operating Engineer - Steel Erection II

Cranes, 2 Drum Derricks, Hydraulic Cranes, Fork Lifts and Boom Trucks.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$70.50**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours
Shift Wage Rate: **\$112.80**

Operating Engineer - Steel Erection III

Compressors, Welding Machines.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$41.84**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours
Shift Wage Rate: **\$66.94**

Operating Engineer - Steel Erection IV

Compressors - Not Combined with Welding Machine.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$39.85**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours
Shift Wage Rate: **\$63.76**

Operating Engineer - Building Work I

Forklifts, Plaster (Platform machine), Plaster Bucket, Concrete Pump and all other equipment used for hoisting material.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$57.82**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Building Work II

Compressors, Welding Machines (Cutting Concrete-Tank Work), Paint Spraying, Sandblasting, Pumps (with the exclusion of Concrete Pumps), All Engines irrespective of Power (Power-Pac) used to drive Auxilliary Equipment, Air, Hydraulic, Jacking System, etc.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$43.28**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Building Work III

Double Drum

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$65.83**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Building Work IV

Stone Derrick, Cranes, Hydraulic Cranes Boom Trucks.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$69.74**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: **\$51.75** overtime hours

Operating Engineer - Building Work V

Dismantling and Erection of Cranes, Relief Engineer.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$64.26**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours

Operating Engineer - Building Work VI

4 Pole Hoist, Single Drum Hoists.

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$63.58**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours

Operating Engineer - Building Work VII

Rack & Pinion and House Cars

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$50.53**
Supplemental Benefit Rate per Hour: **\$28.60**
Supplemental Note: \$51.75 overtime hours
For New House Car projects started after 7/1/11 only: Wage Rate per Hour \$40.31

Overtime Description

On jobs of more than one shift, if an Employee fails to report for work through any cause over which the Employer has no control, the Employee on duty will continue to work at the rate of single time.

For House Cars and Rack & Pinion only: Overtime paid at time and one-half for all hours in excess of eight hours in a day, Saturday, Sunday and Holidays worked.

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.
Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Lincoln's Birthday
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Employees must work at least one day in the payroll week in which the holiday occurs to receive the paid holiday

Shift Rates

For Steel Erection Only: Shifts may be worked at the single time rate at other than the regular working hours (8:00 A.M. to 4:30 P.M.) on the following work ONLY: Heavy construction jobs on work below the street level, over railroad tracks and on building jobs.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Operating Engineer Local #14)

FLOOR COVERER

(Interior vinyl composition tile, sheath vinyl linoleum and wood parquet tile including site preparation and synthetic turf not including site preparation)

Floor Coverer

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$46.15

Supplemental Benefit Rate per Hour: \$38.50

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$48.88

Supplemental Benefit Rate per Hour: \$42.70

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Two shifts may be utilized with the first shift working 8:00 A.M. to the end of the shift at the straight time of pay. The second shift will receive one hour at double time rate for the last hour of the shift. (eight for seven, nine for eight).

(Carpenters District Council)

GLAZIER
(New Construction, Remodeling, and Alteration)

Glazier

Effective Period: 7/1/2013 - 10/31/2013

Wage Rate per Hour: **\$42.00**

Supplemental Benefit Rate per Hour: **\$33.24**

Supplemental Note: Supplemental Benefit Overtime Rate: **\$41.24**

Effective Period: 11/1/2013 - 6/30/2014

Wage Rate per Hour: **\$42.00**

Supplemental Benefit Rate per Hour: **\$34.09**

Supplemental Note: Supplemental Benefit Overtime Rate: **\$42.59**

Overtime Description

An optional 8th hour can be worked at straight time rate. If 9th hour is worked, then both hours or more (8th & 9th or more) will be at the double time rate of pay.

Overtime

Double time the regular rate after a 7 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

Shifts shall be any 7 hours beyond 4:00 P.M. for which the glazier shall receive 8 hours pay for 7 hours worked.

(Local #1281)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

GLAZIER - REPAIR & MAINTENANCE

(For the Installation of Glass - All repair and maintenance work on a particular building, whenever performed, where the total cumulative contract value is under \$105,000. Except where enumerated (i.e. plate glass windows) does not apply to non-residential buildings.)

Craft Jurisdiction for repair, maintenance and fabrication

Plate glass replacement, Residential glass replacement, Residential mirrors and shower doors, Storm windows and storm doors, Residential replacement windows, Herculite door repairs, Door closer repairs, Retrofit apartment house (non commercial buildings), Glass tinting.

Effective Period: 7/1/2013 - 4/30/2014

Wage Rate per Hour: \$23.50

Supplemental Benefit Rate per Hour: \$18.54

Effective Period: 5/1/2014 - 6/30/2014

Wage Rate per Hour: \$23.60

Supplemental Benefit Rate per Hour: \$19.04

Overtime

Time and one half the regular rate after an 8 hour day.

Double time the regular rate for Sunday.

Time and one half the regular hourly rate after 40 hours in any work week.

Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

(Local #1281)

HEAT AND FROST INSULATOR

Heat & Frost Insulator

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$56.48

Supplemental Benefit Rate per Hour: \$33.31

Effective Period: 1/20/2014 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$56.98

Supplemental Benefit Rate per Hour: \$34.81

Overtime Description

Double time shall be paid for supplemental benefits during overtime work.

8th hour paid at time and one half.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Triple time the regular rate for work on the following holiday(s).

Labor Day

Paid Holidays

None

Shift Rates

The first shift shall work seven hours at the regular straight time rate. The second and third shift shall work seven hours the regular straight time hourly rate plus a fourteen percent wage and benefit premium.

Off hour work in occupied or retail buildings may be worked on weekdays with an increment of \$1.00 per hour and eight hours pay for seven (7) hours worked. Double time will apply for over seven (7) hours worked on weekdays, weekends or holidays.

(Local #12)

HOUSE WRECKER (TOTAL DEMOLITION)

House Wrecker - Tier A

On all work sites the first, second, eleventh and every third House Wrecker thereafter shall be Tier A House Wreckers (i.e. 1st, 2nd, 11th, 14th etc). The 10th and 20th House Wrecker shall be apprentices. Other House Wreckers shall be Tier B House Wreckers.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$34.01
Supplemental Benefit Rate per Hour: \$25.14

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$34.51
Supplemental Benefit Rate per Hour: \$25.59

House Wrecker - Tier B

On all work sites the first, second, eleventh and every third House Wrecker thereafter shall be Tier A House Wreckers (i.e. 1st, 2nd, 11th, 14th etc). The 10th and 20th House Wrecker shall be apprentices. Other House Wreckers shall be Tier B House Wreckers.

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$23.75
Supplemental Benefit Rate per Hour: \$18.62

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$24.02
Supplemental Benefit Rate per Hour: \$19.12

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

(Mason Tenders District Council)

IRON WORKER - ORNAMENTAL

Iron Worker - Ornamental

Effective Period: 7/1/2013 – 1/19/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$42.30

Supplemental Benefit Rate per Hour: \$43.54

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$42.70

Supplemental Benefit Rate per Hour: \$44.57

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Overtime Description

Time and one half the regular rate after a 7 hour day for a maximum of two hours on any regular work day (the 8th and 9th hour) and double time shall be paid for all work on a regular work day thereafter, time and one half the regular rate for Saturday for the first seven hours of work and double time shall be paid for all work on a Saturday thereafter.

Overtime

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

For off shift work - 8 hours pay for 7 hours of work. When two or three shifts are employed on a job, Monday through Friday, the workday for each shift shall be seven hours and paid for ten and one-half hours at the single time rate. When two or three shifts are worked on Saturday, Sunday or holidays, each shift shall be seven hours and paid fifteen and three-quarters hours.

(Local #580)

IRON WORKER - STRUCTURAL

Iron Worker - Structural

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$46.75

Supplemental Benefit Rate per Hour: \$62.48

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$47.25

Supplemental Benefit Rate per Hour: \$64.43

Supplemental Note: Supplemental benefits are to be paid at the applicable overtime rate when overtime is in effect.

Overtime Description

Monday through Friday- the first eight hours are paid at straight time, the 9th and 10th hours are paid at time and one-half the regular rate, all additional weekday overtime is paid at double the regular rate. Saturdays- the first eight hours are paid at time and one-half the regular rate, double time thereafter. Sunday-all shifts are paid at double time.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

Monday through Friday - First Shift: First eight hours are paid at straight time, the 9th & 10th hours are paid at time and a half, double time paid thereafter. Second and third Shifts: First eight hours are paid at time and one-half, double time thereafter. Saturdays: All shifts, first eight hours paid at time and one-half, double time thereafter: Sunday all shifts are paid at double time.

(Local #40 & #361)

LABORER

(Foundation, Concrete, Excavating, Street Pipe Layer and Common)

Laborer

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Excavation and foundation work for buildings, heavy construction, engineering work, and hazardous waste removal in connection with the above work. Landscaping tasks in connection with heavy construction work, engineering work and building projects. Projects include, but are not limited to pollution plants, sewers, parks, subways, bridges, highways, etc.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.25

Supplemental Benefit Rate per Hour: \$33.25

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

Labor Day

Thanksgiving Day

Shift Rates

When two shifts are employed, single time rate shall be paid for each shift. When three shifts are found necessary, each shift shall work seven and one half hours (7 ½), but shall be paid for eight (8) hours of labor, and be permitted one half hour for lunch.

(Local #731)

LANDSCAPING

(Landscaping tasks, as well as tree pruning, tree removing, spraying and maintenance in connection with the planting of street trees and the planting of trees in city parks but not when such activities are performed as part of, or in connection with, other construction or reconstruction projects.)

Landscaper (Above 6 years experience)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$24.25

Supplemental Benefit Rate per Hour: \$12.30

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Landscaper (3 - 6 years experience)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$23.25
Supplemental Benefit Rate per Hour: \$12.30

Landscaper (up to 3 years experience)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$20.75
Supplemental Benefit Rate per Hour: \$12.30

Groundperson

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$20.75
Supplemental Benefit Rate per Hour: \$12.30

Tree Remover / Pruner

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$29.25
Supplemental Benefit Rate per Hour: \$12.30

Landscaper Sprayer (Pesticide Applicator)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$19.25
Supplemental Benefit Rate per Hour: \$12.30

Watering - Plant Maintainer

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$14.25
Supplemental Benefit Rate per Hour: \$12.30

Overtime Description

For all overtime work performed, supplemental benefits shall include an additional seventy-five (\$0.75) cents per hour.

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.
Time and one half the regular rate for work on a holiday plus the day's pay.

Paid Holidays

New Year's Day
Memorial Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Shift Rates

Work performed on a 4pm to 12am shift has a 15% differential. Work performed on a 12am to 8am shift has a 20% differential.

(Local #175)

MARBLE MECHANIC

Marble Setter

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$49.19

Supplemental Benefit Rate per Hour: \$32.24

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$50.57

Supplemental Benefit Rate per Hour: \$33.82

Marble Finisher

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$39.05

Supplemental Benefit Rate per Hour: \$31.43

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$39.71

Supplemental Benefit Rate per Hour: \$33.10

Marble Polisher

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$34.73

Supplemental Benefit Rate per Hour: \$24.60

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$35.64

Supplemental Benefit Rate per Hour: \$25.64

Overtime Description

Supplemental Benefit contributions are to be made at the applicable overtime rates. Time and one half the regular rate after a 7 hour day or time and one half the regular rate after an 8 hour day - chosen by Employer at the start of the project and then would last for the full duration of the project.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

- New Year's Day
- President's Day
- Good Friday
- Memorial Day
- Independence Day
- Labor Day
- Columbus Day
- Veteran's Day
- Thanksgiving Day
- Day after Thanksgiving
- Christmas Day

Paid Holidays

None

(Local #7)

MASON TENDER

Mason Tender

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$35.00

Supplemental Benefit Rate per Hour: \$25.74

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$35.53

Supplemental Benefit Rate per Hour: \$26.31

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

- New Year's Day
- President's Day
- Memorial Day
- Independence Day
- Labor Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

The Employer may work two (2) shifts with the first shift at the straight time wage rate and the second shift receiving eight (8) hours paid for seven (7) hours work at the straight time wage rate.

(Local #79)

MASON TENDER (INTERIOR DEMOLITION WORKER)

(The erection, building, moving, servicing and dismantling of enclosures, scaffolding, barricades, protection and site safety structures etc., on Interior Demolition jobs.)

Mason Tender Tier A

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$34.07

Supplemental Benefit Rate per Hour: \$19.77

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$34.59

Supplemental Benefit Rate per Hour: \$20.75

Mason Tender Tier B

On Interior Demolition job sites 33 1/3 % of the employees shall be classified as Tier A Interior Demolition Workers and 66 2/3 % shall be classified as Tier B Interior Demolition Workers; provided that the employer may employ more than 33 1/3 % Tier A Interior Demolition Workers on the job site. Where the number of employees on a job site is not divisible by 3, the first additional employee (above the number of employees divisible by three) shall be a Tier B Interior Demolition Worker, and the second additional employee shall be a Tier A Interior Demolition Worker.

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$23.27

Supplemental Benefit Rate per Hour: \$14.08

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$23.78

Supplemental Benefit Rate per Hour: \$15.07

Overtime

Time and one half the regular rate after an 8 hour day.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

(Local #79)

METALLIC LATHER

Metallic Lather

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$41.43

Supplemental Benefit Rate per Hour: \$40.15

Supplemental Note: Supplemental benefits for overtime are paid at the appropriate overtime rate.

Overtime Description

Overtime would be time and one half the regular rate after a seven (7) or eight (8) hours workday, which would be set at the start of the job.

Overtime

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Presidential Election Day
Thanksgiving Day
Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

There shall be either two (2) or three (3) shifts, each shift shall be eight (8) hours with nine (9) hours pay, including one half (½) hour for lunch. Off-Hour Start shall commence after 3:30 P.M. and shall conclude by 6:00 A.M. The first consecutive seven (7) hours shall be at straight time with a differential of twelve dollars (\$12.00) per hour. Fringes shall be paid at the straight time rate.

(Local #46)

MILLWRIGHT

Millwright

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$47.69

Supplemental Benefit Rate per Hour: \$48.87

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

1/2 day on New Year's Eve if work is performed in the A.M.

Shift Rates

The first shift shall receive the straight time rate of pay. The second shift receives the straight time rate of pay plus fifteen (15%) per cent. Members of the second shift shall be allowed one half hour to eat, with this time being included in the hours of the workday established. There must be a first shift to work a second shift. All additional hours worked shall be paid at the time and one-half rate of pay plus fifteen (15%) per cent for weekday hours.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

(Local #740)

MOSAIC MECHANIC

Mosaic Mechanic - Mosaic & Terrazzo Mechanic

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$44.39**

Supplemental Benefit Rate per Hour: **\$35.11**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.08 per hour.

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$44.64**

Supplemental Benefit Rate per Hour: **\$35.83**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.80 per hour.

Mosaic Mechanic - Mosaic & Terrazzo Finisher

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$42.78**

Supplemental Benefit Rate per Hour: **\$35.11**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.08 per hour.

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$43.03**

Supplemental Benefit Rate per Hour: **\$35.82**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.79 per hour.

Mosaic Mechanic - Machine Operator Grinder

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$42.78**

Supplemental Benefit Rate per Hour: **\$35.11**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.08 per hour.

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$43.03**

Supplemental Benefit Rate per Hour: **\$35.82**

Supplemental Note: Supplemental benefits for overtime to be paid at the rate of \$46.79 per hour.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Good Friday
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

(Local #7)

PAINTER

Painter - Brush & Roller

Effective Period: 7/1/2013 - 4/30/2014

Wage Rate per Hour: \$37.50

Supplemental Benefit Rate per Hour: \$25.62

Supplemental Note: \$30.25 on overtime

Effective Period: 5/1/2014 - 6/30/2014

Wage Rate per Hour: \$39.50

Supplemental Benefit Rate per Hour: \$26.12

Supplemental Note: \$30.75 on overtime

Spray & Scaffold / Decorative / Sandblast

Effective Period: 7/1/2013 - 4/30/2014

Wage Rate per Hour: \$40.50

Supplemental Benefit Rate per Hour: \$25.62

Supplemental Note: \$30.25 on overtime

Effective Period: 5/1/2014 - 6/30/2014

Wage Rate per Hour: \$42.50

Supplemental Benefit Rate per Hour: \$26.12

Supplemental Note: \$30.75 on overtime

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Memorial Day
Independence Day
Labor Day
Columbus Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

(District Council of Painters #9)

PAINTER - SIGN

Designer

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$36.15**

Supplemental Benefit Rate per Hour: **\$9.66**

Journey person

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$33.62**

Supplemental Benefit Rate per Hour: **\$9.66**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

All work performed outside the regular 8 hour work day (either 7:00 A.M to 3:30 P.M or 8:00 A.M. to 4:30 P.M) shall be paid at time and one half the regular hourly rate.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

(Local #8A-28A)

PAINTER - STRIPER

Striper (paint)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$33.50

Supplemental Benefit Rate per Hour: \$11.62

Supplemental Note: Overtime Supplemental Benefit rate - \$7.42; New Hire Rate (0-3 months) - \$0.00

Lineperson (thermoplastic)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$37.50

Supplemental Benefit Rate per Hour: \$11.62

Supplemental Note: Overtime Supplemental Benefit rate - \$7.42; New Hire Rate (0-3 months) - \$0.00

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Employees hired before April 1, 2003: 15% night shift premium differential for work commenced at 9:00 PM or later.

Vacation

Employees with one to two years service shall accrue vacation based on hours worked: 250 hours worked - 1 day vacation; 500 hours worked - 2 days vacation; 750 hours worked - 3 days vacation; 900 hours worked - 4 days vacation; 1,000 hours worked - 5 days vacation. Employees with two to five years service receive two weeks vacation. Employees with five to twenty years service receive three weeks vacation. Employees with twenty to twenty-five years service receive four weeks vacation. Employees with 25 or more years service receive five weeks vacation. Vacation must be taken during winter months. 2 Personal Days except employees hired after 4/1/12 who do not have 2 years of service.

(Local #917)

PAINTER - STRUCTURAL STEEL

Painters on Structural Steel

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$47.00
Supplemental Benefit Rate per Hour: \$32.08

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$47.00
Supplemental Benefit Rate per Hour: \$33.58

Painter - Power Tool

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$53.00
Supplemental Benefit Rate per Hour: \$32.08

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$53.00
Supplemental Benefit Rate per Hour: \$33.58

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).
New Year's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

None

Shift Rates

Regular hourly rates plus a ten per cent (10%) differential

(Local #806)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

PAPERHANGER

Paperhanger

Effective Period: 7/1/2013 - 4/30/2014

Wage Rate per Hour: **\$39.00**

Supplemental Benefit Rate per Hour: **\$29.23**

Supplemental Note: Supplemental benefits are to be paid at the appropriate straight time and overtime rate.

Effective Period: 5/1/2014 - 6/30/2014

Wage Rate per Hour: **\$41.08**

Supplemental Benefit Rate per Hour: **\$29.23**

Supplemental Note: Supplemental benefits are to be paid at the appropriate straight time and overtime rate.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

Shift Rates

Evening shift - 4:30 P.M. to 12:00 Midnight (regular rate of pay); any work performed before 7:00 A.M. shall be at time and one half the regular base rate of pay.

(District Council of Painters #9)

PAVER AND ROADBUILDER

Paver & Roadbuilder - Formsetter

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$43.54**

Supplemental Benefit Rate per Hour: **\$33.55**

Paver & Roadbuilder - Laborer

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paving and road construction work, regardless of material used, including but not limited to preparation of job sites, removal of old surfaces, asphalt and/or concrete, by whatever method, including but not limited to milling; laying of concrete; laying of asphalt for temporary, patchwork, and utility paving (but not production paving); site preparation and incidental work before the installation of rubberized materials and similar surfaces; installation and repair of temporary construction fencing; slurry seal coating, maintenance of safety surfaces; play equipment installation, and other related work.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$39.67

Supplemental Benefit Rate per Hour: \$33.55

Production Paver & Roadbuilder - Screed Person

(Production paving is asphalt paving when using a paving machine or on a project where a paving machine is traditionally used)

Adjustment of paving machinery on production paving jobs.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$45.12

Supplemental Benefit Rate per Hour: \$33.55

Production Paver & Roadbuilder - Raker

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$44.61

Supplemental Benefit Rate per Hour: \$33.55

Production Paver & Roadbuilder - Shoveler

General laborer (except removal of surfaces - see Paver and Roadbuilder-Laborer) including but not limited to tamper, AC paint and liquid tar work.

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$41.32

Supplemental Benefit Rate per Hour: \$33.55

Overtime Description

Veteran's Day is a Paid Holiday for employees working on production paving.

If an employee works New Year's Day or Christmas Day, they receive the single time rate plus 25%.

Employees who work on a holiday listed below receive the straight time rate plus one day's pay for the holiday.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Paid Holidays

Memorial Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 PREVAILING WAGE SCHEDULE

Independence Day
Labor Day
Presidential Election Day
Thanksgiving Day

Shift Rates

When two shifts are employed, the work period for each shift shall be a continuous eight (8) hours. When three shifts are employed, each shift will work seven and one half (7 ½) hours but will be paid for eight (8) hours since only one half (1/2) hour is allowed for meal time.

When two or more shifts are employed, single time will be paid for each shift.

Night Work - On night work, the first eight (8) hours of work will be paid for at the single time rate, except that production paving work shall be paid at 20% over the single time rate for the screed person, rakers and shovelers directly involved only. All other workers will be exempt. Hours worked over eight (8) hours during said shift shall be paid for at the time and one-half rate.

(Local #1010)

PLASTERER

Plasterer

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$41.13

Supplemental Benefit Rate per Hour: \$24.95

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$41.78

Supplemental Benefit Rate per Hour: \$27.95

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paid Holidays

None

Shift Rates

When it is not possible to conduct alteration work during regular work hours, in a building occupied by tenants, said work shall proceed on a shift basis: however work over seven (7) hours in any twenty four (24) hour period, the time after seven (7) hours shall be considered overtime.

The second shift shall start at a time between 3:30 p.m. and 7:00 p.m. and shall consist of seven (7) working hours and shall receive eight (8) hours of wages and benefits at the straight time rate. The workers on the second shift shall be allowed one-half (½) hour to eat with this time being included in the seven (7) hours of work.

(Local #530)

PLASTERER - TENDER

Plasterer - Tender

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$35.00**

Supplemental Benefit Rate per Hour: **\$25.74**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$35.53**

Supplemental Benefit Rate per Hour: **\$26.31**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

When work commences outside regular work hours, workers receive an hour additional (differential) wage and supplement payment. Eight hours pay for seven hours work or nine hours pay for eight hours work.

(Mason Tenders District Council)

PLUMBER

Plumber

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: **\$52.36**

Supplemental Benefit Rate per Hour: **\$37.34**

Supplemental Note: Overtime supplemental benefit rate per hour: **\$74.40**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$64.87**

Supplemental Benefit Rate per Hour: **\$25.18**

Supplemental Note: Overtime supplemental benefit rate per hour: **\$50.08**

Overtime Description

Double time the regular rate after a 7 hour day - unless for new construction site work where the plumbing contract price is \$1.5 million or less, the hours of labor can be 8 hours per day at the employers option. On Alteration jobs when other mechanical trades at the site are working an eighth hour at straight time, then the plumber shall also work an eighth hour at straight time.

Overtime

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Shift work, when directly specified in public agency or authority documents where plumbing contract is \$8 million or less, will be permitted. 30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday. 50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Plumbers Local #1)

PLUMBER (MECHANICAL EQUIPMENT AND SERVICE)
(Mechanical Equipment and Service work shall include any repair and/or replacement of the present plumbing system.)

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$33.46

Supplemental Benefit Rate per Hour: \$16.93

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$38.27

Supplemental Benefit Rate per Hour: \$12.84

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

(Plumbers Local # 1)

PLUMBER (RESIDENTIAL RATES FOR 1, 2 AND 3 FAMILY HOME CONSTRUCTION)

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$37.11

Supplemental Benefit Rate per Hour: \$25.56

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$44.91

Supplemental Benefit Rate per Hour: \$18.37

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime

Double time the regular rate after an 8 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

30% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shifts Monday to Friday.
50% shift premium shall be paid for wages and fringe benefits for 4:00 pm and midnight shift work performed on weekends. For shift work on holidays, double time wages and fringe benefits shall be paid.

(Plumbers Local #1)

**PLUMBER: PUMP & TANK
(Installation and Maintenance)**

Plumber - Pump & Tank

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$53.01
Supplemental Benefit Rate per Hour: \$31.86

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$62.83
Supplemental Benefit Rate per Hour: \$21.37

Overtime

Time and one half the regular rate after an 8 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.

Overtime Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

All work outside the regular workday (8:00 A.M. to 3:30 P.M.) is to be paid at time and one half the regular hourly rate

(Plumbers Local #1)

POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING RENOVATION)

Pointer - Waterproofer, Caulker Mechanic

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$45.41

Supplemental Benefit Rate per Hour: \$23.29

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

Paid Holidays

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

None

Shift Rates

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:30 P.M.) is to be paid at time and one half the regular rate.

(Bricklayer District Council)

ROOFER

Roofer

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$39.00

Supplemental Benefit Rate per Hour: \$27.37

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$40.00

Supplemental Benefit Rate per Hour: \$27.87

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Second shift - Regular hourly rate plus a 10% differential. Third shift - Regular hourly rate plus a 15% differential.

(Local #8)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

**SANDBLASTER - STEAMBLASTER
(Exterior Building Renovation)**

Sandblaster / Steamblaster

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$45.41**

Supplemental Benefit Rate per Hour: **\$23.29**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

All work outside the regular work day (an eight hour workday between the hours of 6:00 A.M. and 4:30 P.M.) is to be paid at time and one half the regular rate.

(Bricklayer District Council)

SHEET METAL WORKER

Sheet Metal Worker

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$45.96**

Supplemental Benefit Rate per Hour: **\$43.19**

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Sheet Metal Worker - Duct Cleaner

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$12.90
Supplemental Benefit Rate per Hour: \$8.07

Sheet Metal Worker - Fan Maintenance

(The temporary operation of fans or blowers in new or existing buildings for heating and/or ventilation, and/or air conditioning prior to the completion of the project.)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$36.77
Supplemental Benefit Rate per Hour: \$43.19

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Work that can only be performed outside regular working hours (seven hours of work between 7:30 A.M. and 3:30 P.M.) - First shift (work between 3:30 P.M. and 11:30 P.M.) - 10% differential above the established hourly rate.
Second shift (work between 11:30 P.M. and 7:30 A.M.) - 15% differential above the established hourly rate.

For Fan Maintenance: On all full shifts of fan maintenance work the straight time hourly rate of pay will be paid for each shift, including nights, Saturdays, Sundays, and holidays. No journey person engaged in fan maintenance shall work in excess of forty (40) hours in any work week.

(Local #28)

**SHEET METAL WORKER - SPECIALTY
(Decking & Siding)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Sheet Metal Specialty Worker

The first worker to perform this work must be paid at the rate of the Sheet Metal Worker. The second and third workers shall be paid the Specialty Worker Rate. The ratio of One Sheet Metal Worker, then Two Specialty Workers shall be utilized thereafter.

Effective Period: 7/1/2013 - 7/31/2013

Wage Rate per Hour: \$41.28

Supplemental Benefit Rate per Hour: \$22.88

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Effective Period: 8/1/2013 - 6/30/2014

Wage Rate per Hour: \$40.78

Supplemental Benefit Rate per Hour: \$23.38

Supplemental Note: Supplemental benefit contributions are to be made at the applicable overtime rates.

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

(Local #28)

SIGN ERECTOR

(Sheet Metal, Plastic, Electric, and Neon)

Sign Erector

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$42.80

Supplemental Benefit Rate per Hour: \$42.17

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Time and one half the regular rate for Sunday.
Time and one half the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day
Washington's Birthday
Memorial Day
Independence Day
Labor Day
Columbus Day
Election Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Shift Rates

Time and one half the regular hourly rate is to be paid for all hours worked outside the regular workday either (7:00 A.M. through 2:30 P.M.) or (8:00 A.M. through 3:30 P.M.)

(Local #137)

STEAMFITTER

Steamfitter I

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: **\$52.50**
Supplemental Benefit Rate per Hour: **\$50.54**
Supplemental Note: Overtime supplemental benefit rate: \$100.34

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$53.25**
Supplemental Benefit Rate per Hour: **\$51.04**
Supplemental Note: Overtime supplemental benefit rate: \$101.34

Overtime

Double time the regular rate after a 7 hour day.
Double time the regular time rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).
New Year's Day
President's Day
Memorial Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Work performed between 3:30 P.M. and 7:00 A.M. and on Saturdays, Sundays and Holidays shall be at double time the regular hourly rate and paid at the overtime supplemental benefit rate above.

Steamfitter II

For heating, ventilation, air conditioning and mechanical public works contracts with a dollar value not to exceed \$15,000,000 and for fire protection/sprinkler public works contracts not to exceed \$1,500,000.

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: **\$52.50**

Supplemental Benefit Rate per Hour: **\$50.54**

Supplemental Note: Overtime supplemental benefit rate: **\$100.34**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$53.25**

Supplemental Benefit Rate per Hour: **\$51.04**

Supplemental Note: Overtime supplemental benefit rate: **\$101.34**

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Paid Holidays

None

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Shift Rates

May be performed outside of the regular workday except Saturday, Sunday and Holidays. A shift shall consist of eight working hours. All work performed in excess of eight hours shall be paid at double time. No shift shall commence after 7:00 P.M. on Friday or 7:00 P.M. the day before holidays. All work performed after 12:01 A.M. Saturday or 12:01 A.M. the day before a Holiday will be paid at double time. When shift work is performed the wage rate for regular time worked is a thirty percent premium together with fringe benefits.

On Transit Authority projects, where work is performed in the vicinity of tracks all shift work on weekends and holidays may be performed at the regular shift rates.

Local #638

**STEAMFITTER - REFRIGERATION AND AIR CONDITIONER
(Maintenance and Installation Service Person)**

Refrigeration and Air Conditioner Mechanic

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$38.05

Supplemental Benefit Rate per Hour: \$12.26

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: \$38.30

Supplemental Benefit Rate per Hour: \$12.76

Refrigeration and Air Conditioner Service Person V

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$31.26

Supplemental Benefit Rate per Hour: \$11.13

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: \$31.47

Supplemental Benefit Rate per Hour: \$11.55

Refrigeration and Air Conditioner Service Person IV

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$25.90

Supplemental Benefit Rate per Hour: \$10.16

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: \$26.07

Supplemental Benefit Rate per Hour: \$10.52

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Refrigeration and Air Conditioner Service Person III

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$22.23**

Supplemental Benefit Rate per Hour: **\$9.44**

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: **\$22.38**

Supplemental Benefit Rate per Hour: **\$9.76**

Refrigeration and Air Conditioner Service Person II

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$18.44**

Supplemental Benefit Rate per Hour: **\$8.78**

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: **\$18.56**

Supplemental Benefit Rate per Hour: **\$9.06**

Refrigeration and Air Conditioner Service Person I

Filter changing and maintenance thereof, oil and greasing, tower and coil cleaning, scraping and painting, general housekeeping, taking of water samples.

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$13.48**

Supplemental Benefit Rate per Hour: **\$8.10**

Effective Period: 1/20/2014 – 6/30/2014

Wage Rate per Hour: **\$13.57**

Supplemental Benefit Rate per Hour: **\$8.30**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

Independence Day

Labor Day

Veteran's Day

Thanksgiving Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Christmas Day

Double time and one half the regular rate for work on the following holiday(s).

Martin Luther King Jr. Day
President's Day
Memorial Day
Columbus Day

Paid Holidays

New Year's Day
Martin Luther King Jr. Day
President's Day
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Christmas Day

(Local #638B)

STONE MASON - SETTER

Stone Mason - Setters

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: **\$47.72**

Supplemental Benefit Rate per Hour: **\$35.28**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$46.56**

Supplemental Benefit Rate per Hour: **\$36.40**

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day
Washington's Birthday
Good Friday
Memorial Day
Independence Day
Labor Day
Thanksgiving Day
Christmas Day

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Paid Holidays

1/2 day on Christmas Eve if work is performed in the A.M.

Shift Rates

For all work outside the regular workday (8:00 A.M. to 3:30 P.M. Monday through Friday), the pay shall be straight time plus a ten percent (10%) differential.

(Bricklayers District Council)

TAPER

Drywall Taper

Effective Period: 7/1/2013 - 12/31/2013

Wage Rate per Hour: **\$44.32**

Supplemental Benefit Rate per Hour: **\$21.66**

Effective Period: 1/1/2014 - 6/24/2014

Wage Rate per Hour: **\$44.82**

Supplemental Benefit Rate per Hour: **\$21.66**

Effective Period: 6/25/2014 - 6/30/2014

Wage Rate per Hour: **\$45.32**

Supplemental Benefit Rate per Hour: **\$21.66**

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Martin Luther King Jr. Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Thanksgiving Day

Christmas Day

Paid Holidays

Any worker who reports to work on Christmas Eve or New Year's Eve pursuant to his employer's instruction shall be entitled to three (3) hours afternoon pay without working.

Shift Rates

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Time and one half the regular rate outside the regular work hours (8:00 A.M. through 3:30 P.M.)

(Local #1974)

**TELECOMMUNICATION WORKER
(Voice Installation Only)**

Telecommunication Worker

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$35.94**

Supplemental Benefit Rate per Hour: **\$13.19**

Supplemental Note: The above rate applies for Manhattan, Bronx, Brooklyn, Queens. \$12.64 for Staten Island only.

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Time and one half the regular rate for Sunday.

Overtime Holidays

Time and one half the regular rate for work on the following holiday(s).

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Paid Holidays

New Year's Day

Lincoln's Birthday

Washington's Birthday

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

Employees have the option of observing either Martin Luther King's Birthday or the day after Thanksgiving instead of Lincoln's Birthday

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Shift Rates

For any workday that starts before 8A.M. or ends after 6P.M. there is a 10% differential for the applicable worker's hourly rate.

Vacation

After 6 months.....one week.
After 12 months but less than 7 years.....two weeks.
After 7 or more but less than 15 years.....three weeks.
After 15 years or more but less than 25 years.....four weeks.

(C.W.A.)

TILE FINISHER

Tile Finisher

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: \$38.49
Supplemental Benefit Rate per Hour: \$27.40

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: \$38.80
Supplemental Benefit Rate per Hour: \$28.03

Overtime

Time and one half the regular rate after a 7 hour day.
Time and one half the regular rate for Saturday.
Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).
New Year's Day
President's Day
Good Friday
Memorial Day
Independence Day
Labor Day
Columbus Day
Veteran's Day
Thanksgiving Day
Day after Thanksgiving
Christmas Day

Paid Holidays

None

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

(Local #7)

TILE LAYER - SETTER

Tile Layer - Setter

Effective Period: 7/1/2013 – 1/19/2014

Wage Rate per Hour: \$48.35

Supplemental Benefit Rate per Hour: \$31.44

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$49.25

Supplemental Benefit Rate per Hour: \$31.82

Overtime

Time and one half the regular rate after a 7 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Good Friday

Memorial Day

Independence Day

Labor Day

Columbus Day

Veteran's Day

Thanksgiving Day

Day after Thanksgiving

Christmas Day

Shift Rates

Off shift work day (work performed outside the regular 8:00 A.M. to 3:30 P.M. workday): shift differential of one and one quarter (1¼) times the regular straight time rate of pay for the seven hours of actual off-shift work.

(Local #7)

TIMBERPERSON

Timberperson

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$42.63

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: **\$44.54**

Overtime

Time and one half the regular rate after an 8 hour day.

Time and one half the regular rate for Saturday.

Double time the regular rate for Sunday.

Saturday may be used as a make-up day at straight time when a day is lost during that week to inclement weather.

Time and one half the regular hourly rate after 40 hours in any work week.

Overtime Holidays

Double time the regular rate for work on the following holiday(s).

New Year's Day

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Presidential Election Day

Thanksgiving Day

Christmas Day

Paid Holidays

None

Shift Rates

Off shift work commencing between 5:00 P.M. and 11:00 P.M. shall work eight and one half hours allowing for one half hour for lunch. The wage rate shall be 113% of the straight time hourly wage rate.

(Local #1536)

TUNNEL WORKER

Blasters, Mucking Machine Operators (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$54.20**

Supplemental Benefit Rate per Hour: **\$48.20**

Tunnel Workers (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: **\$52.31**

Supplemental Benefit Rate per Hour: **\$46.59**

Top Nipper (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$51.35**
Supplemental Benefit Rate per Hour: **\$45.78**

Outside Lock Tender, Outside Gauge Tender, Muck Lock Tender (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$50.42**
Supplemental Benefit Rate per Hour: **\$44.91**

Bottom Bell & Top Bell Signal Person: Shaft Person (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$50.42**
Supplemental Benefit Rate per Hour: **\$44.92**

Changehouse Attendant: Powder Watchperson (Compressed Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$43.94**
Supplemental Benefit Rate per Hour: **\$42.55**

Blasters (Free Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$51.72**
Supplemental Benefit Rate per Hour: **\$46.03**

Tunnel Workers (Free Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$49.48**
Supplemental Benefit Rate per Hour: **\$44.06**

All Others (Free Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$45.73**
Supplemental Benefit Rate per Hour: **\$40.75**

Microtunneling (Free Air Rates)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$39.58**
Supplemental Benefit Rate per Hour: **\$35.25**

Overtime Description

For Repair-Maintenance Work on Existing Equipment and Facilities - Time and one half the regular rate after a 7 hour day, or for Saturday, or for Sunday. Double time the regular rate for work on a holiday.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 PREVAILING WAGE SCHEDULE

For Small-Bore Micro Tunneling Machines - Time and one-half the regular rate shall be paid for all overtime.

Overtime

Double time the regular rate after an 8 hour day.

Double time the regular time rate for Saturday.

Double time the regular rate for Sunday.

Double time the regular rate for work on the following holiday(s).

Paid Holidays

New Year's Day

Lincoln's Birthday

President's Day

Memorial Day

Independence Day

Labor Day

Columbus Day

Election Day

Veteran's Day

Thanksgiving Day

Christmas Day

(Local #147)

WELDER

**TO BE PAID AT THE RATE OF THE JOURNEYPERSON IN THE TRADE
PERFORMING THE WORK.**

OFFICE OF THE COMPTROLLER

CITY OF NEW YORK

220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

APPENDIX

Pursuant to Labor Law §220 (3-e), only apprentices who are individually registered in a bona fide program to which the employer contractor is a participant and registered with the New York State Department of Labor, may be employed on a public work project.

Any employee listed on a payroll at an apprentice wage rate, who is not registered as above, shall be paid the journey person wage rate for the classification of work he actually performed.

Apprentice ratios are established to ensure the proper safety, training and supervision of apprentices. A ratio establishes the number of journey workers required for each apprentice in a program and on a job site. Ratios are interpreted as follows: in the case of a 1:1, 1:4 ratio, there must be one journey worker for the first apprentice, and four additional journey workers for each subsequent apprentice.

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

APPRENTICESHIP SCHEDULE OF PREVAILING WAGES AND SUPPLEMENTAL BENEFITS
ADDENDUM
EFFECTIVE PERIOD JANUARY 20, 2014 THROUGH JUNE 30, 2014

List of Amended Classifications

1. ASBESTOS HANDLER
2. BRICKLAYER
3. FLOOR COVERER
4. HOUSE WRECKER
5. IRONWORKER – ORNAMENTAL
6. IRON WORKER - STRUCTURAL
7. MASON TENDER
8. PLASTERER
9. PLUMBER

TABLE OF CONTENTS

<u>CLASSIFICATION</u>	<u>PAGE</u>
ASBESTOS HANDLER.....	4
BOILERMAKER.....	4
BRICKLAYER.....	6
CARPENTER.....	7
CEMENT MASON.....	8
CEMENT AND CONCRETE WORKER.....	8
DERRICKPERSON & RIGGER (STONE).....	9
DOCKBUILDER/PILE DRIVER.....	9
ELECTRICIAN.....	10
ELEVATOR CONSTRUCTOR.....	13
ELEVATOR REPAIR & MAINTENANCE.....	14
ENGINEER.....	15
ENGINEER - OPERATING.....	15
FLOOR COVERER.....	16
GLAZIER.....	17
HEAT & FROST INSULATOR.....	17
HOUSE WRECKER.....	18
IRON WORKER - ORNAMENTAL.....	19
IRON WORKER - STRUCTURAL.....	21
LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE LAYER & COMMON).....	22
MARBLE MECHANICS.....	22
MASON TENDER.....	24
METALLIC LATHER.....	25
MILLWRIGHT.....	26
PAVER AND ROADBUILDER.....	26
PAINTER.....	27
PAINTER - STRUCTURAL STEEL.....	28
PLASTERER.....	28
PLUMBER.....	29
POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING RENOVATION).....	31
ROOFER.....	31
SHEET METAL WORKER.....	32
SIGN ERECTOR.....	33
STEAMFITTER.....	35
STONE MASON - SETTER.....	35
TAPER.....	36
TILE LAYER - SETTER.....	37
TIMBERPERSON.....	37

ASBESTOS HANDLER
(Ratio of Apprentice Journeyman: 1 to 1, 1 to 3)

Asbestos Handler (First 1000 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 78% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$15.05
Effective 1/20/2014 – Supplemental Benefits Per Hour: 15.45

Asbestos Handler (Second 1000 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$15.05
Effective 1/20/2014 – Supplemental Benefits Per Hour: 15.45

Asbestos Handler (Third 1000 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 83% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$15.05
Effective 1/20/2014 – Supplemental Benefits Per Hour: 15.45

Asbestos Handler (Fourth 1000 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 89% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$15.05
Effective 1/20/2014 – Supplemental Benefits Per Hour: 15.45

(Local #78)

BOILERMAKER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Boilermaker (First Year)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$28.75

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour: \$29.74

Boilermaker (Second Year: 1st Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$30.33

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$31.40

Boilermaker (Second Year: 2nd Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$31.91

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$33.05

Boilermaker (Third Year: 1st Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 80% of Journeyperson's rat
Supplemental Benefit Rate Per Hour: \$33.49

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyperson's rat
Supplemental Benefit Rate Per Hour: \$34.69

Boilermaker (Third Year: 2nd Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 85% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$35.05

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 85% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$36.34

Boilermaker (Fourth Year: 1st Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$36.63

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$38.00

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Boilermaker (Fourth Year: 2nd Six Months)

Effective Period: 7/1/2013 - 12/31/2013
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$38.19

Effective Period: 1/1/2014 - 6/30/2014
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$39.65

(Local #5)

BRICKLAYER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Bricklayer (First 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

Bricklayer (Second 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

Bricklayer (Third 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

Bricklayer (Fourth 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

Bricklayer (Fifth 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 90% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

Bricklayer (Sixth 750 Hours)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$16.60
Effective 1/20/2014 – Supplemental Benefits Per Hour: 17.10

(Bricklayer District Council)

CARPENTER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Carpenter (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$30.29

Carpenter (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$30.29

Carpenter (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$30.29

Carpenter (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$30.29

(Carpenters District Council)

CEMENT MASON

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Cement Mason (First Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 50% of Journeyman's Rate

Cement Mason (Second Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 60% of Journeyman's Rate

Cement Mason (Third Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 70% of Journeyman's Rate

(Local #780)

CEMENT AND CONCRETE WORKER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Cement & Concrete Worker (0 - 500 hours)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 50% of Journeyman's rate

Supplemental Benefit Rate Per Hour: \$18.04

Cement & Concrete Worker (501 - 1000 hours)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 65% of Journeyman's rate

Supplemental Benefit Rate Per Hour: \$18.87

Cement & Concrete Worker (1001 - 2000 hours)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 65% of Journeyman's rate

Supplemental Benefit Rate Per Hour: \$24.25

Cement & Concrete Worker (2001 - 4000 hours)

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: \$25.07

(Cement Concrete Workers District Council)

DERRICKPERSON & RIGGER (STONE)
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 6)

Derrickperson & Rigger (stone) - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Benefit Rate Per Hour: 50% of Journeyman's rate

Derrickperson & Rigger (stone) - Second Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

Derrickperson & Rigger (stone) - Second Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

Derrickperson & Rigger (stone) - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 90% of Journeyman's rate
Supplemental Benefit Rate Per Hour: 75% of Journeyman's rate

(Local #197)

DOCKBUILDER/PILE DRIVER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 6)

Dockbuilder/Pile Driver (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate Per Hour: \$30.29

Dockbuilder/Pile Driver (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$30.29

Dockbuilder/Pile Driver (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$30.29

Dockbuilder/Pile Driver (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Benefit Rate Per Hour: \$30.29

(Carpenters District Council)

ELECTRICIAN

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Electrician (First Term: 0-6 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$12.50
Supplemental Benefit Rate per Hour: \$10.86
Overtime Supplemental Rate per Hour: \$11.68

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$12.50
Supplemental Benefit Rate per Hour: \$11.10
Overtime Supplemental Rate per Hour: \$11.93

Electrician (First Term: 7-12 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$13.50
Supplemental Benefit Rate per Hour: \$11.37
Overtime Supplemental Rate per Hour: \$12.26

Effective period: 5/14/2014 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$13.50**
Supplemental Benefit Rate per Hour: **\$11.62**
Overtime Supplemental Rate per Hour: **\$12.51**

Electrician (Second Term: 0-6 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: **\$14.50**
Supplemental Benefit Rate per Hour: **\$11.88**
Overtime Supplemental Rate per Hour: **\$12.83**

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: **\$14.50**
Supplemental Benefit Rate per Hour: **\$12.13**
Overtime Supplemental Rate per Hour: **\$13.08**

Electrician (Second Term: 7-12 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: **\$15.50**
Supplemental Benefit Rate per Hour: **\$12.39**
Overtime Supplemental Rate per Hour: **\$13.41**

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: **\$15.50**
Supplemental Benefit Rate per Hour: **\$12.64**
Overtime Supplemental Rate per Hour: **\$13.66**

Electrician (Third Term: 0-6 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: **\$16.50**
Supplemental Benefit Rate per Hour: **\$12.90**
Overtime Supplemental Rate per Hour: **\$13.98**

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: **\$16.50**
Supplemental Benefit Rate per Hour: **\$13.15**
Overtime Supplemental Rate per Hour: **\$14.23**

Electrician (Third Term: 7-12 Months)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: **\$17.50**
Supplemental Benefit Rate per Hour: **\$13.40**
Overtime Supplemental Rate per Hour: **\$14.56**

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: **\$17.50**
Supplemental Benefit Rate per Hour: **\$13.65**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Overtime Supplemental Rate per Hour: \$14.81

Electrician (Fourth Term: 0-6 Months - Hired on or after 5/10/07)

Effective period: 7/1/2013 - 5/13/2014

Wage Rate per Hour: \$18.50

Supplemental Benefit Rate per Hour: \$13.91

Overtime Supplemental Rate per Hour: \$15.13

Effective period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$18.50

Supplemental Benefit Rate per Hour: \$14.16

Overtime Supplemental Rate per Hour: \$15.38

Electrician (Fourth Term: 7-12 Months - Hired on or after 5/10/07)

Effective period: 7/1/2013 - 5/13/2014

Wage Rate per Hour: \$20.25

Supplemental Benefit Rate per Hour: \$14.80

Overtime Supplemental Rate per Hour: \$16.14

Effective period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$20.50

Supplemental Benefit Rate per Hour: \$15.18

Overtime Supplemental Rate per Hour: \$16.53

Electrician (Fifth Term: 0-12 Months - Hired on or after 5/10/07)

Effective period: 7/1/2013 - 5/13/2014

Wage Rate per Hour: \$22.00

Supplemental Benefit Rate per Hour: \$17.30

Overtime Supplemental Rate per Hour: \$18.68

Effective period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$22.50

Supplemental Benefit Rate per Hour: \$18.06

Overtime Supplemental Rate per Hour: \$19.47

Electrician (Fifth Term: 13-18 Months - Hired on or after 5/10/07)

Effective period: 7/1/2013 - 5/13/2014

Wage Rate per Hour: \$26.50

Supplemental Benefit Rate per Hour: \$19.56

Overtime Supplemental Rate per Hour: \$21.23

Effective period: 5/14/2014 - 6/30/2014

Wage Rate per Hour: \$27.00

Supplemental Benefit Rate per Hour: \$20.32

Overtime Supplemental Rate per Hour: \$22.01

Electrician (Fourth Term: 0-6 Months - Hired before 5/10/07)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$22.10
Supplemental Benefit Rate per Hour: \$15.74
Overtime Supplemental Rate per Hour: \$17.20

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$22.10
Supplemental Benefit Rate per Hour: \$15.99
Overtime Supplemental Rate per Hour: \$17.45

Electrician (Fourth Term: 7-12 Months - Hired before 5/10/07)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$23.95
Supplemental Benefit Rate per Hour: \$16.69
Overtime Supplemental Rate per Hour: \$18.26

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$24.20
Supplemental Benefit Rate per Hour: \$17.06
Overtime Supplemental Rate per Hour: \$18.66

Electrician (Fifth Term: 0-18 Months - Hired before 5/10/07)

Effective period: 7/1/2013 - 5/13/2014
Wage Rate per Hour: \$25.80
Supplemental Benefit Rate per Hour: \$19.21
Overtime Supplemental Rate per Hour: \$20.83

Effective period: 5/14/2014 - 6/30/2014
Wage Rate per Hour: \$26.30
Supplemental Benefit Rate per Hour: \$19.96
Overtime Supplemental Rate per Hour: \$21.61

Overtime Description

Overtime Wage paid at time and one half the regular rate
For "A" rated Apprentices (work in excess of 7 hours per day)
For "M" rated Apprentices (work in excess of 8 hours per day)

(Local #3)

**ELEVATOR CONSTRUCTOR
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Elevator (Constructor) - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$26.87

Elevator (Constructor) - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$27.92

Elevator (Constructor) - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$29.38

Elevator (Constructor) - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.84

(Local #1)

ELEVATOR REPAIR & MAINTENANCE

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 2)

Elevator Service/Modernization Mechanic (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Benefit Per Hour: \$26.79

Elevator Service/Modernization Mechanic (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Benefit Per Hour: \$27.12

Elevator Service/Modernization Mechanic (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyperson's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Per Hour: \$28.43

Elevator Service/Modernization Mechanic (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Benefit Per Hour: \$29.74

(Local #1)

ENGINEER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

Engineer - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$22.49
Supplemental Benefit Rate per Hour: \$20.68

Engineer - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$28.11
Supplemental Benefit Rate per Hour: \$20.68

Engineer - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$20.92
Supplemental Benefit Rate per Hour: \$20.68

Engineer - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$33.73
Supplemental Benefit Rate per Hour: \$20.68

(Local #15)

ENGINEER - OPERATING
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 5)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Operating Engineer - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour 40% of Journeyman's Rate
Supplemental Benefit Per Hour: \$18.60

Operating Engineer - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's Rate
Supplemental Benefit Per Hour: \$18.60

Operating Engineer - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's Rate
Supplemental Benefit Per Hour: \$18.60

(Local #14)

FLOOR COVERER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Floor Coverer (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$25.75
Effective 1/20/2014 – Supplemental Benefits Per Hour: 29.55

Floor Coverer (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$25.75
Effective 1/20/2014 – Supplemental Benefits Per Hour: 29.55

Floor Coverer (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyman's rate
Supplemental Rate Per Hour: \$25.75
Effective 1/20/2014 – Supplemental Benefits Per Hour: 29.55

Floor Coverer (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$25.75
Effective 1/20/2014 – Supplemental Benefits Per Hour: 29.55

(Carpenters District Council)

GLAZIER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Glazier (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$11.97

Glazier (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$21.13

Glazier (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$23.54

Glazier (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$28.34

(Local #1281)

HEAT & FROST INSULATOR
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Heat & Frost Insulator (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 40% of Journeyperson's rate

Heat & Frost Insulator (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

Heat & Frost Insulator (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 70% of Journeyperson's rate

Heat & Frost Insulator (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 80% of Journeyperson's rate

(Local #12)

**HOUSE WRECKER
(TOTAL DEMOLITION)
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)**

House Wrecker - First Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$20.36**
Supplemental Benefit Rate per Hour: **\$16.35**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$20.52**
Supplemental Benefit Rate per Hour: **\$16.60**

House Wrecker - Second Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$21.46**
Supplemental Benefit Rate per Hour: **\$16.35**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$21.67**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Supplemental Benefit Rate per Hour: \$16.60

House Wrecker - Third Year

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$23.01

Supplemental Benefit Rate per Hour: \$16.35

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$23.27

Supplemental Benefit Rate per Hour: \$16.60

House Wrecker - Fourth Year

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: \$25.36

Supplemental Benefit Rate per Hour: \$16.35

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: \$25.83

Supplemental Benefit Rate per Hour: \$16.60

(Local #79)

IRON WORKER - ORNAMENTAL

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Iron Worker (Ornamental) - 1st Four Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 60% of Journeyman's rate

Supplemental Rate Per Hour: \$35.78

Iron Worker (Ornamental) 5 - 10 Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 65% of Journeyman's rate

Supplemental Rate Per Hour: \$36.75

Iron Worker (Ornamental) 11 - 16 Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 70% of Journeyman's rate

Supplemental Rate Per Hour: \$37.72

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Iron Worker (Ornamental) 17 - 22 Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$39.66

Iron Worker (Ornamental) 23 - 28 Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 85% of Journeyman's rate
Supplemental Rate Per Hour: \$40.63

Iron Worker (Ornamental) 29 - 36 Months - Hired on or Before 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 95% of Journeyman's rate
Supplemental Rate Per Hour: \$42.57

Iron Worker (Ornamental) - 1st Ten Months - Hired After 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$33.84
Effective 1/20/2014 – Supplemental Benefits Per Hour: 34.55

Iron Worker (Ornamental) - 11 - 16 Months - Hired After 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$34.81
Effective 1/20/2014 – Supplemental Benefits Per Hour: 35.55

Iron Worker (Ornamental) - 17 - 22 Months - Hired After 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$35.78
Effective 1/20/2014 – Supplemental Benefits Per Hour: 36.55

Iron Worker (Ornamental) - 23 - 28 Months - Hired After 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Rate Per Hour: \$37.72
Effective 1/20/2014 – Supplemental Benefits Per Hour: 38.56

Iron Worker (Ornamental) - 29 - 36 Months - Hired After 8/1/08

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyman's rate
Supplemental Rate Per Hour: \$39.66

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective 1/20/2014 – Supplemental Benefits Per Hour: 40.56

(Local #580)

IRON WORKER - STRUCTURAL
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 6)

Iron Worker (Structural) - 1st Six Months

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: **\$24.48**
Supplemental Benefit Rate per Hour: **\$43.87**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$24.73**
Supplemental Benefit Rate per Hour: **\$45.07**

Iron Worker (Structural) - 7- 18 Months

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: **\$25.08**
Supplemental Benefit Rate per Hour: **\$43.87**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$25.33**
Supplemental Benefit Rate per Hour: **\$45.07**

Iron Worker (Structural) - 19 - 36 months

Effective Period: 7/1/2013 – 1/19/2014
Wage Rate per Hour: **\$25.68**
Supplemental Benefit Rate per Hour: **\$43.87**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$25.93**
Supplemental Benefit Rate per Hour: **\$45.07**

(Local #40 and #361)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

LABORER (FOUNDATION, CONCRETE, EXCAVATING, STREET PIPE LAYER & COMMON)
(Ratio Apprentice to Journeyman: 1 to 1, 1 to 3)

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - First 1000 hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$33.25

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Second 1000 hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$33.25

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Third 1000 hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Rate Per Hour: \$33.25

Laborer (Foundation, Concrete, Excavating, Street Pipe Layer & Common) - Fourth 1000 hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 90% of Journeyman's rate
Supplemental Rate Per Hour: \$33.25

(Local #731)

MARBLE MECHANICS
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Cutters & Setters - First 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Cutters & Setters - Second 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 55% of Journeyperson's rate

Cutters & Setters - Third 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 65% of Journeyperson's rate

Cutters & Setters - Fourth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Cutters & Setters - Fifth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 85% of Journeyperson's rate

Cutters & Setters - Sixth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 95% of Journeyperson's rate

Polishers & Finishers - First 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 50% of Journeyperson's rate

NO BENEFITS PAID DURING THE FIRST TWO MONTHS (PROBATIONARY PERIOD)

Polishers & Finishers - Second 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

Polishers & Finishers - Third 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 75% of Journeyperson's rate

Polishers & Finishers - Fourth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 90% of Journeyperson's rate

(Local #7)

MASON TENDER
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Mason Tender - First Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$20.63**
Supplemental Benefit Rate per Hour: **\$17.06**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$20.79**
Supplemental Benefit Rate per Hour: **\$17.58**

Mason Tender - Second Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$21.73**
Supplemental Benefit Rate per Hour: **\$17.06**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$21.94**
Supplemental Benefit Rate per Hour: **\$17.58**

Mason Tender - Third Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$23.33**
Supplemental Benefit Rate per Hour: **\$17.06**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$23.59**
Supplemental Benefit Rate per Hour: **\$17.58**

Mason Tender - Fourth Year

Effective Period: 7/1/2013 - 1/19/2014
Wage Rate per Hour: **\$25.93**
Supplemental Benefit Rate per Hour: **\$17.06**

Effective Period: 1/20/2014 - 6/30/2014
Wage Rate per Hour: **\$26.25**
Supplemental Benefit Rate per Hour: **\$17.58**

(Local #79)

METALLIC LATHER
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Metallic Lather (First Year -Called Prior to 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$28.11
Supplemental Benefit Rate per Hour: \$22.79

Metallic Lather (Second Year - Called Prior to 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$32.71
Supplemental Benefit Rate per Hour: \$24.44

Metallic Lather (Third Year - Called Prior to 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$37.77
Supplemental Benefit Rate per Hour: \$25.59

Metallic Lather (First Year -Called On Or After 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$17.71
Supplemental Benefit Rate per Hour: \$19.85

Metallic Lather (Second Year - Called On Or After 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$22.81
Supplemental Benefit Rate per Hour: \$19.85

Metallic Lather (Third Year - Called On Or After 6/29/11)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$27.91
Supplemental Benefit Rate per Hour: \$19.85

(Local #46)

MILLWRIGHT

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Millwright (First Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$26.23

Supplemental Benefit Rate per Hour: \$31.51

Millwright (Second Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$31.00

Supplemental Benefit Rate per Hour: \$34.77

Millwright (Third Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$35.77

Supplemental Benefit Rate per Hour: \$39.19

Millwright (Fourth Year)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$45.30

Supplemental Benefit Rate per Hour: \$44.63

(Local #740)

PAVER AND ROADBUILDER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Paver and Roadbuilder - First Year (Minimum 1000 hours)

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate per Hour: \$26.19

Supplemental Benefit Rate per Hour: \$16.20

Paver and Roadbuilder - Second Year (Minimum 1000 hours)

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate per Hour: **\$27.77**
Supplemental Benefit Rate per Hour: **\$16.20**

(Local #1010)

PAINTER
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Painter - Brush & Roller - First Year

Effective Period: 7/1/2013 - 4/30/2014
Wage Rate per Hour: **\$15.00**
Supplemental Benefit Rate per Hour: **\$11.38**

Effective Period: 5/1/2014 - 6/30/2014
Wage Rate per Hour: **\$15.80**
Supplemental Benefit Rate per Hour: **\$11.88**

Painter - Brush & Roller - Second Year

Effective Period: 7/1/2013 - 4/30/2014
Wage Rate per Hour: **\$18.75**
Supplemental Benefit Rate per Hour: **\$15.23**

Effective Period: 5/1/2014 - 6/30/2014
Wage Rate per Hour: **\$19.75**
Supplemental Benefit Rate per Hour: **\$15.73**

Painter - Brush & Roller - Third Year

Effective Period: 7/1/2013 - 4/30/2014
Wage Rate per Hour: **\$22.50**
Supplemental Benefit Rate per Hour: **\$18.14**

Effective Period: 5/1/2014 - 6/30/2014
Wage Rate per Hour: **\$23.70**
Supplemental Benefit Rate per Hour: **\$18.64**

Painter - Brush & Roller - Fourth Year

Effective Period: 7/1/2013 - 4/30/2014
Wage Rate per Hour: **\$30.00**
Supplemental Benefit Rate per Hour: **\$23.52**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
\$220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 5/1/2014 - 6/30/2014
Wage Rate per Hour: \$31.60
Supplemental Benefit Rate per Hour: \$24.02

(District Council of Painters)

PAINTER - STRUCTURAL STEEL
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Painters - Structural Steel (First Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 40% of Journeyman's rate

Painters - Structural Steel (Second Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 60% of Journeyman's rate

Painters - Structural Steel (Third Year)

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 80% of Journeyman's rate

(Local #806)

PLASTERER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Plasterer - First Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$12.76
Effective 1/20/2014 - Supplemental Benefits Per Hour: 15.76

Plasterer - First Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 45% of Journeyman's rate
Supplemental Rate Per Hour: \$13.24

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective 1/20/2014 – Supplemental Benefits Per Hour: 16.24

Plasterer - Second Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$15.21
Effective 1/20/2014 – Supplemental Benefits Per Hour: 18.21

Plasterer - Second Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$16.29
Effective 1/20/2014 – Supplemental Benefits Per Hour: 19.29

Plasterer - Third Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Rate Per Hour: \$18.46
Effective 1/20/2014 – Supplemental Benefits Per Hour: 21.46

Plasterer - Third Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyman's rate
Supplemental Rate Per Hour: \$19.54
Effective 1/20/2014 – Supplemental Benefits Per Hour: 22.54

(Local #530)

PLUMBER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Plumber - First Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$14.00**
Supplemental Benefit Rate per Hour: \$0.71

Plumber - First Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: **\$14.00**
Supplemental Benefit Rate per Hour: **\$2.96**

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Plumber - Second Year

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$18.26**

Supplemental Benefit Rate per Hour: **\$16.32**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$23.67**

Supplemental Benefit Rate per Hour: **\$11.16**

Plumber - Third Year

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$20.36**

Supplemental Benefit Rate per Hour: **\$16.32**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$25.77**

Supplemental Benefit Rate per Hour: **\$11.16**

Plumber - Fourth Year

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$23.21**

Supplemental Benefit Rate per Hour: **\$16.32**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$28.62**

Supplemental Benefit Rate per Hour: **\$11.16**

Plumber - Fifth Year: 1st Six Months

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$24.61**

Supplemental Benefit Rate per Hour: **\$16.32**

Effective Period: 1/20/2014 - 6/30/2014

Wage Rate per Hour: **\$30.02**

Supplemental Benefit Rate per Hour: **\$11.16**

Plumber - Fifth Year: 2nd Six Months

Effective Period: 7/1/2013 - 1/19/2014

Wage Rate per Hour: **\$36.68**

Supplemental Benefit Rate per Hour: **\$16.32**

Effective Period: 1/20/2014 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate per Hour: \$42.09
Supplemental Benefit Rate per Hour: \$11.16

(Plumbers Local #1)

**POINTER - WATERPROOFER, CAULKER MECHANIC (EXTERIOR BUILDING
RENOVATION)**
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Pointer - Waterproofer, Caulker Mechanic - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$25.00
Supplemental Benefit Rate per Hour: \$3.64

Pointer - Waterproofer, Caulker Mechanic - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$27.25
Supplemental Benefit Rate per Hour: \$8.59

Pointer - Waterproofer, Caulker Mechanic - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$32.23
Supplemental Benefit Rate per Hour: \$11.34

Pointer - Waterproofer, Caulker Mechanic - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate per Hour: \$38.66
Supplemental Benefit Rate per Hour: \$11.34

(Bricklayer District Council)

ROOFER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 2)

Roofer - First Year

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 35% of Journeyperson's Rate

Roofer - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 50% of Journeyperson's Rate

Roofer - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 60% of Journeyperson's Rate

Roofer - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 75% of Journeyperson's Rate

(Local #8)

SHEET METAL WORKER
(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 3)

Sheet Metal Worker - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 30% of Journeyperson's rate
Supplemental Rate Per Hour: \$15.37

Sheet Metal Worker - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 35% of Journeyperson's rate
Supplemental Rate Per Hour: \$18.24

Sheet Metal Worker - Third Year (1st Six Months)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyperson's rate
Supplemental Rate Per Hour: \$20.06

Sheet Metal Worker - Third Year (2nd Six Months)

Effective Period: 7/1/2013 - 6/30/2014

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Wage Rate Per Hour: 45% of Journeyman's rate
Supplemental Rate Per Hour: \$21.87

Sheet Metal Worker - Fourth Year (1st Six Months)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyman's rate
Supplemental Rate Per Hour: \$23.69

Sheet Metal Worker - Fourth Year (2nd Six Months)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyman's rate
Supplemental Rate Per Hour: \$25.33

Sheet Metal Worker - Fifth Year (1st Six Months)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyman's rate
Supplemental Rate Per Hour: \$27.47

Sheet Metal Worker - Fifth Year (2nd Six Months)

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyman's rate
Supplemental Rate Per Hour: \$31.23

(Local #28)

SIGN ERECTOR

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Sign Erector - First Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 35% of Journeyman's rate
Supplemental Rate Per Hour: \$5.96

Sign Erector - First Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyman's rate
Supplemental Rate Per Hour: \$6.75

Sign Erector - Second Year: 1st Six Months

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 45% of Journeyperson's rate
Supplemental Rate Per Hour: \$7.55

Sign Erector - Second Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$8.34

Sign Erector - Third Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 55% of Journeyperson's rate
Supplemental Rate Per Hour: \$9.13

Sign Erector - Third Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 60% of Journeyperson's rate
Supplemental Rate Per Hour: \$9.92

Sign Erector - Fourth Year: 1st Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$10.72

Sign Erector - Fourth Year: 2nd Six Months

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: \$11.51

Sign Erector - Fifth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 75% of Journeyperson's rate
Supplemental Rate Per Hour: \$12.30

Sign Erector - Sixth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$12.30

(Local #137)

STEAMFITTER

(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 3)

Steamfitter - First Year

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate and Supplemental Per Hour: 40% of Journeyman's rate

Steamfitter - Second Year

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate and Supplemental Rate Per Hour: 50% of Journeyman's rate.

Steamfitter - Third Year

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate and Supplemental Rate per Hour: 65% of Journeyman's rate.

Steamfitter - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate and Supplemental Rate Per Hour: 80% of Journeyman's rate.

Steamfitter - Fifth Year

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate and Supplemental Rate Per Hour: 85% of Journeyman's rate.

(Local #638)

STONE MASON - SETTER

(Ratio Apprentice of Journeyman: 1 to 1, 1 to 2)

Stone Mason - Setters - First 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Stone Mason - Setters - Second 750 Hours

Effective Period: 7/1/2013 - 6/30/2014

Wage Rate Per Hour: 60% of Journeyman's rate

Supplemental Rate Per Hour: 50% of Journeyman's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Stone Mason - Setters - Third 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 70% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fourth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Fifth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 90% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

Stone Mason - Setters - Sixth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 100% of Journeyperson's rate
Supplemental Rate Per Hour: 50% of Journeyperson's rate

(Bricklayers District Council)

TAPER

(Ratio of Apprentice to Journeyperson: 1 to 1, 1 to 4)

Drywall Taper - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 40% of Journeyperson's rate

Drywall Taper - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 60% of Journeyperson's rate

Drywall Taper - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 80% of Journeyperson's rate

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

(Local #1974)

TILE LAYER - SETTER
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 4)

Tile Layer - Setter - First 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 50% of Journeyman's rate

Tile Layer - Setter - Second 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 55% of Journeyman's rate

Tile Layer - Setter - Third 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 65% of Journeyman's rate

Tile Layer - Setter - Fourth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 75% of Journeyman's rate

Tile Layer - Setter - Fifth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 85% of Journeyman's rate

Tile Layer - Setter - Sixth 750 Hours

Effective Period: 7/1/2013 - 6/30/2014
Wage and Supplemental Rate Per Hour: 95% of Journeyman's rate

(Local #7)

TIMBERPERSON
(Ratio of Apprentice to Journeyman: 1 to 1, 1 to 6)

OFFICE OF THE COMPTROLLER, CITY OF NEW YORK
§220 APPRENTICESHIP PREVAILING WAGE SCHEDULE

Timberperson - First Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 40% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.04

Timberperson - Second Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 50% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.04

Timberperson - Third Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 65% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.04

Timberperson - Fourth Year

Effective Period: 7/1/2013 - 6/30/2014
Wage Rate Per Hour: 80% of Journeyperson's rate
Supplemental Rate Per Hour: \$30.04

(Local #1536)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

**DDC STANDARD GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS**



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

June 01, 2013

No Text



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

**DIVISION 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
TABLE OF CONTENTS**

SECTION NO.	SECTION TITLE
01 10 00	SUMMARY
01 31 00	PROJECT MANAGEMENT AND COORDINATION
01 32 00	CONSTRUCTION PROGRESS DOCUMENTATION
01 32 33	PHOTOGRAPHIC DOCUMENTATION
01 33 00	SUBMITTAL PROCEDURES
01 35 03	GENERAL MECHANICAL REQUIREMENTS
01 35 06	GENERAL ELECTRICAL REQUIREMENTS
01 35 26	SAFETY REQUIREMENTS PROCEDURES
01 35 91	HISTORIC TREATMENT PROCEDURES
01 40 00	QUALITY REQUIREMENTS
01 42 00	REFERENCES
01 50 00	TEMPORARY FACILITIES, SERVICES AND CONTROLS
01 54 11	TEMPORARY ELEVATORS AND HOISTS
01 54 23	TEMPORARY SCAFFOLDING AND PLATFORMS
01 73 00	EXECUTION
01 74 19	CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
01 77 00	CLOSEOUT PROCEDURES
01 78 39	CONTRACT RECORD DOCUMENTS
01 79 00	DEMONSTRATION AND OWNERS PRE-ACCEPTANCE ORIENTATION
01 81 13	SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
01 81 13.13	VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS
01 81 19	INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
01 91 13	GENERAL COMMISSIONING REQUIREMENTS

June 01, 2013



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

NO TEXT

SECTION 01 10 00
SUMMARY

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Addendum to the General Conditions: These General Conditions include and are supplemented by the Addendum to the General Conditions (the "Addendum"). The Addendum includes the following: (1) schedules referred to in these General Conditions (Schedule A through F), (2) information regarding the applicability of various articles, and (3) amended articles, if any.

1.2 SUMMARY:

- A. This section includes the following:
 - 1. Scope and Intent
 - 2. Provisions Referenced in the Contract
 - 3. Performance of Work During Non-Regular Work Hours (Pursuant to a Change Order)
 - 4. Interruption of Services at Existing Facilities

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SCOPE AND INTENT:

- A. Description of Project: Refer to the Addendum for a description of the project.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 B

- B. LEED: The City of New York will seek U.S. Green Building Council (USGBC) LEED (Leadership in Energy and Environmental Design) certification for this Project as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS" and the Addendum to the General Conditions.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.4 C

- C. COMMISSIONING: The project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS, and the Addendum to the General Conditions. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.
- D. PROGRESS SCHEDULE: Refer to Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION for requirements of the project.
- E. COMPLETION OF WORK: Work to be done under the Contract is comprised of the furnishing of all labor, materials, equipment and other appurtenances, and obtaining all regulatory agency approvals necessary and required to complete the construction work in accordance with the Contract.
- F. OMISSION OF DETAILS: All work called for in the Specifications applicable to the Contract but not shown on the Contract Drawings in their present form, or vice versa, is required, and shall be performed by the Contractor as though it were originally delineated or described. The cost of such work shall be deemed included in the total Contract Price.
- G. WORK NOT IN SPECIFICATIONS OR CONTRACT DRAWINGS: Work not particularly specified in the Specifications nor detailed on the Contract Drawings but involved in carrying out their intent or in the complete and proper execution of the work, is required, and shall be performed by the Contractor. The cost of such work shall be deemed included in the total Contract Price.
- H. SILENCE OF THE SPECIFICATIONS: The apparent silence of the Specifications as to any detail, or the apparent omission from them of a detailed description concerning any work to be done and materials to be furnished, shall be regarded as meaning that only the best practice is to prevail and that only the best material and workmanship is to be used and interpretation of the Specifications shall be made upon that basis.
- I. CONFLICT BETWEEN CONTRACT DRAWINGS AND SPECIFICATIONS: Should any conflict occur in or between the Drawings and Specifications, the Contractor shall be deemed to have estimated the most expensive way of doing the work unless the Contractor shall have asked for and obtained a decision in writing from the Commissioner before the submission of the bid as to what shall govern.

1.5 CONTRACT DRAWINGS AND SPECIFICATIONS:

- A. SCHEDULE C - The Contract Drawings are listed in Schedule C, which is set forth in the Addendum. Such drawings referred to in the Contract, and in the applicable Specifications for the Contract, bear the general title:

City of New York
Department of Design and Construction
Division of Public Buildings
- B. DOCUMENTS FURNISHED TO THE CONTRACTOR - After the award of the Contract, the Contractor will be furnished with five (5) complete sets of paper prints of all Contract Drawings mentioned in Paragraph A above, as well as a copy of the Specifications.
- C. ADDITIONAL COPIES of Drawings and Specifications, when requested, will be furnished to the Contractor if available.

- D. SUPPLEMENTARY DRAWINGS - When, in the opinion of the Commissioner, it becomes necessary to more fully explain the work to be done, or to illustrate the work further, or to show any changes which may be required, drawings known as Supplementary Drawings will be prepared by the Commissioner.
- E. COMPENSATION - Where Supplementary Drawings entail extra work, compensation therefore to the Contractor shall be subject to the terms of the Contract. The Supplementary Drawings shall be binding upon the Contractor with the same force as the Contract Drawings.
- F. SUPPLEMENTARY DRAWING PRINTS - Three (3) copies of prints of these Supplementary Drawings will be furnished to the Contractor.
- G. COPIES TO SUBCONTRACTORS - The Contractor shall furnish each of its subcontractors and material suppliers such copies of Contract Drawings, Supplementary Drawings, or copies of the Specifications as may be required for its work.

1.6 COORDINATION:

- A. COORDINATION AND COOPERATION - The Contractor shall consult and study the requirements of the Contract Drawings and Specifications for all required work, including all work to be performed by trade subcontractors, so that the Contractor may become acquainted with the work of the project as a whole in order to achieve the proper coordination and cooperation necessary for the efficient and timely performance of the work.
- B. CONTRACTOR TO CHECK DRAWINGS: - The Contractor shall verify all dimensions, quantities and details shown on the Contract Drawings, Schedules, or other data received from the Commissioner, and shall notify the Commissioner of all errors, omissions, conflicts and discrepancies found therein. Notice of such errors shall be given before the Contractor proceeds with any work. Figures shall be used in preference to scale dimensions and large-scale drawings in preference to small-scale drawings.

1.7 SHOP DRAWINGS AND RECORD DRAWINGS:

Refer to Division I Section 01 33 00 – SUBMITAL PROCEDURES and Section 01 78 39 – PROJECT RECORD DRAWINGS for requirements applicable to shop drawings and record drawings.

1.8 TEMPORARY FACILITIES, SERVICES AND CONTROLS:

Refer to Division I Section 01 50 00 – TEMPORARY FACILITIES SERVICES AND CONTROLS for the responsibilities of the Contractor.

1.9 DUST CONTROL:

The Contractor shall prepare, execute and manage a “Dust Control Plan” for the prevention of the emission of dust from construction related activities in compliance with 15 RCNY 13-01 et. seq.

1.10 PROVISIONS REFERENCED IN THE CONTRACT:

- A. SCHEDULE A - Various Articles of the Contract refer to requirements set forth in Schedule A of the General Conditions. Schedule A, which is included in the Addendum, sets forth (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to the Contract.



- B. EXTENSION OF TIME - Applications for Extensions of Time, as indicated in Article 13 of the Contract, shall be made in accordance with the Rules of the Procurement Policy Board.
- C. PARTIAL PAYMENTS FOR MATERIALS IN ADVANCE OF THEIR INCORPORATION IN THE WORK PURSUANT TO ARTICLE 42 OF THE CONTRACT – In order to better insure the availability of materials, fixtures and equipment when needed for the work, the Commissioner may authorize partial payment for certain materials, fixtures and equipment, prior to their incorporation in the work, but only in strict accordance with, and subject to, all the terms and conditions set forth in the Specifications, unless an alternate method of payment is elsewhere provided in the Specifications for specified materials, fixtures or equipment.
1. The Contractor shall submit to the Commissioner a written request, in quadruplicate, for payment for materials purchased or to be purchased for which the Contractor needs to be paid prior to their actual incorporation in the work. The request shall be accompanied by a schedule of the types and quantities of materials, and shall state whether such materials are to be stored on or off the site.
 2. Where the materials are to be stored off the site, they shall be stored at a place other than the Contractor's premises (except with the written consent of the Commissioner) and under the conditions prescribed or approved by the Commissioner. The Contractor shall set apart and separately store at the place or places of storage all materials and shall clearly mark same "PROPERTY OF THE CITY OF NEW YORK", and further, shall not at any time move any of said materials to another off-site place of storage without the prior written consent of the Commissioner. Materials may be removed from their place of storage off the site for incorporation in the work upon approval of the Resident Engineer.
 3. Where the materials are to be stored at the site, they shall be stored at such locations as shall be designated by the Resident Engineer and only in such quantities as, in the opinion of the Resident Engineer, will not interfere with the proper performance of the work by the Contractor or by other Contractors then engaged in performing work on the site. Such materials shall not be removed from their place of storage on the site except for incorporation in the work, without the approval of the Resident Engineer.
 4. INSURANCE
 - a. STORAGE OFF-SITE – Where the materials are stored off the site and until such time as they are incorporated in the work, the Contractor shall fully insure such materials against any and all risks of destruction, damage or loss including but not limited to fire, theft, and any other casualty or happening. The policy of insurance shall be payable to the City of New York. It shall be in such terms and amounts as shall be approved by the Commissioner and shall be placed with a company duly licensed to do business in the State of New York. The Contractor shall deliver the original and one (1) copy of such policy or policies marked "Fully Paid" to the Commissioner.
 - b. STORAGE ON THE SITE – Where the materials are stored at the site, the Contractor shall furnish satisfactory evidence to the Commissioner that they are properly insured against loss, by endorsements or otherwise, under the policy or policies of insurance obtained by the Contractor to cover losses to materials owned or installed by the Contractor. The policy of insurance shall cover fire and extended coverage against windstorm, hail, explosion and riot attending a strike, civil commotion, aircraft, vehicles and smoke.
 5. All costs, charges and expenses arising out of the storage of such materials, shall be paid by the Contractor and the City hereby reserves the right to retain out of any partial or final payment made under the Contract an amount sufficient to cover such costs, charges and expenses with the understanding that the City shall have and may exercise any and all other remedies at law for the recovery of such cost, charges and expenses. There shall be no

increase in the Contract price for such costs, charges and expenses and the Contractor shall not make any claim or demand for compensation therefore.

6. The Contractor shall pay any and all costs of handling and delivery of materials, to the place of storage and from the place of storage to the site of the work; and the City shall have the right to retain from any partial or final payment an amount sufficient to cover the cost of such handling and delivery.
7. In the event that the whole or any part of these materials are lost, damaged or destroyed in advance of their satisfactory incorporation in the work, the Contractor, at the Contractor's own cost, shall replace such lost, damaged or destroyed materials of the same character and quality. The City will reimburse the Contractor for the cost of the replaced materials to the extent, and only to the extent, of the funds actually received by the City under the policies of insurance hereinbefore referred to. Until such time as the materials are replaced, the City will deduct from the value of the stored materials or from any other money due under the Contract, the amount paid to the Contractor for such lost, damaged or destroyed materials.
8. Should any of the materials paid for the City hereunder be subsequently rejected or incorporated in the work in a manner or by a method not in accordance with the Contract Documents, the Contractor shall remove and replace, at Contractor's own cost, such defective or improperly incorporated material with materials complying with the Contract Documents. Until such materials are replaced, the City will deduct from the value of the stored materials or from any other money due the Contractor, the amount paid by the City for such rejected or improperly incorporated materials.
9. Payments for the cost of materials made hereunder shall not be deemed to be an acceptance of such materials as being in accordance with the Contract Documents, and the Contractor always retains and must comply with the Contractor's duty to deliver to the site and properly incorporate in the work only materials which comply with the Contract Documents.
10. The Contractor shall retain any and all risks in connection with the damage, destruction or loss of the materials paid for hereunder to the time of delivery of the same to the site of the work and their proper incorporation in the work in accordance with the Contract Documents.
11. The Contractor shall comply with all laws and the regulations of any governmental body or agency pertaining to the priority purchase, allocation and use of the materials.
12. When requesting payment for such materials, the Contractor shall submit with the partial estimate duly authenticated documents of title, such as bills of sale, invoices or warehouse receipts, all in quadruplicate. The executed bills of sale shall transfer title to the materials from the Contractor to the City. (In the event that the invoices state that the material has been purchased by a subcontractor, bills of sale in quadruplicate will also be required transferring title to the materials from subcontractor to the Contractor).
13. Where the Contractor, with the approval of the Commissioner, has purchased unusually large quantities of materials in order to assure their availability for the work, the Commissioner, at the Commissioner's option, may waive the requirements of Paragraph 12 provided the Contractor furnishes evidence in the form of an affidavit from the Contractor in quadruplicate, and such other proof as the Commissioner may require, that the Contractor is the sole owner of such materials and has purchased them free and clear of all liens and other encumbrances. In such event, the Contractor shall pay for such materials and submit proof thereof, in the same manner as provided in Paragraph 12 hereof, within seven (7) days after receipt of payment therefore from the Comptroller. Failure on the part of the Contractor to submit satisfactory evidence that all such materials have been paid for in full, shall preclude the Contractor from payments under the Contract.



- 14. The Contractor shall include in each succeeding partial estimate requisition a summary of materials stored which shall set forth the quantity and value of materials in storage, on or off the site, at the end of each preceding estimate period; the amount removed for incorporation in the work; the quantity and value of materials delivered during the current period and the total value of materials on hand for which payment thereof will be included in the current payment estimate.
- 15. Upon proof to the satisfaction of the Commissioner of the actual cost of such materials and upon submission of proper proof of title as required under Paragraph 12 or Paragraph 13 hereof, payment will be made therefore to the extent of 85%, provided however, that the cost so verified, established and approved shall not exceed the estimated cost of such materials included in the approved detailed breakdown estimate submitted in accordance with Article 41 of the Contract; if it does, the City will pay only 85% approved estimated cost.
- 16. Upon the incorporation in the work of any such materials, which have been paid for in advance of such incorporation in accordance with the foregoing provisions, payment will be made for such materials incorporated in the work pursuant to Article 42 of the Contract, less any sums paid pursuant to Paragraph 15 herein.

D. MOBILIZATION PAYMENT – A line item for mobilization shall be allowed on the Contractor's Detailed Bid Breakdown submitted in accordance with Article 41 of the Contract. The Mobilization Payment is intended to include the cost of required bonds, insurance coverage and/or any other expenses required for the initiation of the Contract Work. All costs for mobilization shall be deemed included in the total Contract Price. The Detailed Bid Breakdown shall reflect, and the Mobilization Payment shall be made, in accordance with the following schedule:

Contract Amount	Percent	Mobilization
Less than - \$ 50,000	x 0	= 0
\$ 50,000 - \$ 100,000	x	= \$ 6,000
\$ 100,001 - \$ 500,000	x 6	= \$ 6,000 (min) - \$ 30,000 (max)
\$ 500,000 - \$ 2,500,000	x 5	= \$ 30,000 (min) - \$ 125,000 (max)
Over - \$ 2,500,000	x 4	= \$ 125,000 (min) - \$ 300,000 (max)

The Contractor may requisition for one-half (1/2) of the Mobilization Payment upon satisfactory completion of the following:

- 1. Installation of any required field office(s).
- 2. Submission of all required insurance certificates and bonds.
- 3. Approval by the Department of Design and Construction of the coordinated progress schedule for the project and the Contractor's Shop Drawing schedule.

The remaining balance of the Mobilization Payment may be requisitioned only after 10 percent (10%) of the Contract price, exclusive of the total amount of Mobilization Payments made or to be made hereunder, shall have been approved for payment.

E. ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING: The Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel in Non-Road Vehicles, and the implementation of Best Available Technology (BAT), as set forth in Article 5.4 of the Contract. Such reports shall be submitted in accordance with the schedule, format, directions and procedures established by the Commissioner.

1.11 PERFORMANCE OF WORK DURING NON-REGULAR WORK HOURS:

- A. NON-REGULAR WORK HOURS: The Commissioner may issue a change order in accordance with Article 25 of the Contract which (1) directs the Contractor to perform the Work, or specific components thereof, during other than regular work hours (i.e., evenings, weekends and holidays), and (2) provides compensation to the Contractor for costs in connection with the performance of Work during other than regular work hours. The Commissioner may issue a change order if a delay has occurred and such delay is not the fault of the Contractor, or if the work is of such an important nature that delay in completing such work would result in serious disadvantage to the public.
- B. PROCEDURE: The Contractor shall (1) obtain whatever permits may be required for performance of the work during other than regular business hours, and (2) pay all necessary fees in connection with such permits. In addition, if directed by the Commissioner, the Contractor shall make immediate application to the Commissioner of the Department of Labor, State of New York, for dispensation in accordance with Subdivision 2 of Section 220 of the Labor Law.

1.12 INTERRUPTION OF SERVICES AT EXISTING FACILITIES:

- A. EVENING AND WEEKEND WORK - Where performance of the Work requires the temporary shutdown(s) of services, such shutdown(s) shall be made at night or on weekends or at such times that will cause no interference with the established routines and operations of the facility in question.
 - 1 Where weekend or evening work is required due to unavoidable service shutdowns, such work shall be performed at no extra cost to the City. Components of the Work that must be performed during other than regular work hours are indicated in the Drawings and/or the Specifications.
- B. INTERRUPTION OF EXISTING FACILITIES:
 - 1 The Contractor shall not interrupt any of the services of the facility nor interfere with such services in any way without the permission of the Commissioner. Such interruption or interferences shall be made as brief as possible, and only at such time stated.
 - 2 Under no circumstances shall the Contractor, its subcontractors, or its workers, be permitted to use any part of the project as a shop, without the permission of the Commissioner.
 - 3 Unnecessary noise shall be avoided at all times and necessary noise shall be reduced to a minimum.
 - 4 Toilet facilities, water and electricity must be operational at all times (i.e. 24/7). No services of the facility can be interrupted in any way without the permission of the Commissioner. Careful coordination of all work with the Resident Engineer must be done to maintain the operational level of the project personnel at the facility.
 - 5 The Contractor shall schedule the work to avoid noise interference that will affect the normal functions of the facility. In particular, construction operations producing noises that are objectionable to the functions of the facility must be scheduled at times of day or night, day of the week, or weekend, which will not interfere with personnel at the facility. Any additional cost resulting from this scheduling shall be borne by the Contractor.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

- 6 The Contractor shall arrange to work continuously, including evening and weekend hours, if required, to assure that services will be shut down only during the time actually required to make the necessary connections to the existing facility.
- 7 The Contractor shall give ample written notice in advance to the Commissioner and personnel at the facility of any required shutdown.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 10 00

SECTION 01 31 00
PROJECT MANAGEMENT AND COORDINATION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

1.2 SUMMARY:

- A. This Section includes administrative provisions for coordinating construction operations on the Project including without limitation the following.
 - 1. Coordination Drawings.
 - 2. Administrative and supervisory personnel.
 - 3. Project meetings.
 - 4. Requests for Interpretation (RFIs).
- B. This section includes the following:
 - 1. Definitions
 - 2. Coordination
 - 3. Submittals
 - 4. Administrative and Supervisory Personnel
 - 5. Project Meetings
 - 6. Requests for Interpretation (RFI's)
 - 7. Correspondence
 - 8. Contractor's Daily Reports
 - 9. Alternate and Substitute Equipment
- C. RELATED SECTIONS: include without limitation the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 3. Section 01 33 00 SUBMITTALS
 - 4. Section 01 35 26 SAFETY REQUIREMENTS
 - 5. Section 01 73 00 EXECUTION REQUIREMENTS
 - 6. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

7. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 COORDINATION:

- A. Coordination: The Contractor shall coordinate its construction operations, including those of its subcontractors, with other entities to ensure the efficient and orderly installation of each part of the Work. The Contractor shall coordinate the various operations required by different Sections of the Specifications that depend on each other for proper installation, connection, and operation.
 - 1. Schedule construction operations in sequence in order to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
 - 2. Coordinate installation of different components to ensure maximum accessibility for required maintenance, service, and repair.
 - 3. Make adequate provisions to accommodate items scheduled for later installation.
 - 4. Where availability of space is limited, coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair of all components, including mechanical and electrical.
- B. The Contractor shall prepare memoranda for distribution to its subcontractors and other involved entities, outlining special procedures required for coordination. Such memoranda shall include required notices, reports, and meeting minutes as applicable.
- C. Administrative Procedures: The Contractor shall coordinate scheduling and timing of required administrative procedures with other construction activities and activities of its subcontractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include without limitation the following:
 - 1. Preparation of Contractor's Construction Schedule.
 - 2. Installation and removal of temporary facilities and controls.
 - 3. Delivery and processing of submittals.
 - 4. Progress meetings.
 - 5. Pre-installation conferences..
 - 6. Startup and adjustment of systems.
 - 7. Project closeout activities.
- D. Conservation: The Contractor shall coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials.

- E. Salvaged Items, Material and/or Equipment: The Specifications may identify certain items, materials or equipment which must be salvaged by the Contractor and handled or disposed of as directed. The Contractor shall comply with all directions in the Specifications regarding the salvaging and handling of identified items, material or equipment.

1.5 SUBMITTALS:

- A. Submit shop drawings, product data, samples etc. in compliance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Coordination Drawings: The Contractor shall prepare applicable Coordination Drawings in compliance with the requirements for Coordination Drawings in Section 01 33 00, SUBMITTAL PROCEDURES.
- C. Safety Plan in compliance with Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES.
- D. Waste Management Plan in compliance with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL
- E. Key Personnel Names: Within 15 days after the Notice to Proceed, the Contractor shall submit a list of key personnel assignments of the Contractor and its subcontractors, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers. Provide names, addresses, and telephone numbers of individuals assigned as standbys in case of the absence of individuals assigned to Project.
1. Post copies of list in Project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.
 2. In addition to Project superintendent, provide other administrative and supervisory personnel as required for proper performance of the Work. Include special personnel required for coordinating all operations by its subcontractors.

1.6 PROJECT MEETINGS:

- A. General: The Resident Engineer will hold regularly scheduled construction progress meetings at the site, at which time the Contractor and appropriate subcontractors shall have their representatives present to discuss all details relative to the execution of the work. The Resident Engineer shall preside over these meetings.
1. Agenda: Prior to each meeting, the Resident Engineer will consult with the Contractor and will prepare an agenda of items to be discussed. In general, after informal discussion of any item on the agenda, the Resident Engineer will summarize the discussion in a brief written statement, and the Contractor will then dictate a brief statement for the record.
 2. Coordination: In addition to construction progress meetings called by the Resident Engineer, the Contractor shall hold regularly scheduled meetings for the purpose of coordinating; expediting and scheduling the work in accordance with the master coordinated Job Progress Chart. The Contractor and its subcontractors, material suppliers or vendors whose presence is necessary, are required to attend. These meetings may, at the discretion of the Contractor, be held at the same place and immediately following the project meetings held by the Resident Engineer. Minutes of these meetings shall be recorded, typed and printed by the Contractor and distributed to all parties concerned.
- B. PRECONSTRUCTION KICK-OFF MEETING:
1. The Resident Engineer will schedule a preconstruction kick-off meeting either at DDC's main office or at the Project site to review responsibilities and personnel assignments and clarify the



role of each participant. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.

2. Attendees: Authorized representative of the Client Agency; Design Consultant; the Contractor and its superintendents, subcontractor(s) and their superintendent(s); LEED sub-consultant and Commissioning Authority /Agent (CxA) as applicable and other concerned parties. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Contract Work.
3. Agenda: Includes without limitation the following as applicable:
 - a. Establishing construction schedule
 - b. Schedule for regular construction meetings
 - c. Phasing
 - d. Critical work sequencing and long-lead items
 - e. Designation of key personnel and their duties
 - f. Reviewing Application for Payment and Change Order Procedures
 - g. Procedures for Requests for Information (RFIs.)
 - h. Review Permits and Approval requirements
 - i. Review all recent Administrative Code reporting requirements relating to the project, (i.e. LL 77, LL86 etc.)
 - j. Procedures for testing and inspecting
 - k. Reviewing special conditions at the Project site
 - l. Distribution of the Contract Documents
 - m. Submittal procedures
 - n. Safety Procedures
 - o. LEED requirements
 - p. Commissioning Requirements
 - q. Preparation of Record Documents
 - r. Historic Treatment requirements
 - s. Use of the premises
 - t. Work restrictions
 - u. Client Agency occupancy requirements
 - v. Responsibility for temporary facilities, services and controls
 - w. Construction Waste Management and Disposal
 - x. Indoor Air Quality Management Plan
 - y. Dust Mitigation Plan
 - z. Office, work, and storage areas
 - aa. Equipment deliveries and priorities
 - bb. Security
 - cc. Progress cleaning
 - dd. Working hours

C. CONSTRUCTION PROGRESS MEETINGS:

1. The Resident Engineer will schedule and conduct construction progress meetings at bi-weekly intervals or as otherwise determined. All participants at the meeting shall be familiar with the Project and authorized to conclude matters relating to the Work. Unless otherwise directed the Design Consultant will record and distribute meeting minutes.
2. Attendees:
 - a. Design Consultant and applicable sub-consultants
 - b. Client Agency Representative
 - c. Representatives from the Contractor, sub-contractor(s), suppliers or other entities involved in the current progress, planning, coordination or future activities of the Work
 - d. Other appropriate DDC personnel, DDC consultants and concerned parties
3. Agenda: Includes without limitation the following:
 - a. Review the Construction Schedule and progress of the Work. Determine if the Work is on time, ahead of schedule or behind schedule. Determine actions to be taken to maintain or accelerate the schedule
 - b. Review and approve prior meeting minutes and follow up open issues
 - c. Coordinate work between each subcontractor
 - d. Sequence of Operations
 - e. Status of submittals, deliveries and off-site fabrication
 - f. Status of inspections and approvals by governing agencies
 - g. Temporary facilities and controls
 - h. Review Site Safety
 - i. Quality and work standards
 - j. Field observations
 - k. Status of correction of deficient items
 - l. RFI's
 - m. Pending changes
 - n. Status of outstanding Payments and Change Orders
 - o. LEED requirements including Construction Waste Management, Indoor Air Quality Plan, Dust Mitigation and Commissioning
 - p. Status of Administrative Code reporting requirements related to the project.

1.7 REQUESTS FOR INFORMATION (RFI):

- A. Procedure: Immediately on discovery of the need for information or interpretation of the Contract Documents, and if not possible to request interpretation at Project meeting, the Contractor shall prepare and submit an RFI in the form specified by the Resident Engineer.
 1. RFI shall originate with the Contractor. RFIs submitted by entities other than Contractor will be returned with no response.
 2. Coordinate and submit RFI in a prompt manner to the Resident Engineer so as to avoid delays in Contractor's work or work of its subcontractors.
 3. RFI Log: The Contractor shall prepare, maintain, and submit a tabular log of RFIs organized by the RFI number monthly to the Resident Engineer.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

4. On receipt of responses and action to the RFI, the Contractor shall update the RFI log and immediately distribute the RFI response to affected parties. Review response(s) and notify the Resident Engineer immediately if the Contractor disagrees with response(s).

1.8 CORRESPONDENCE:

Copies of all correspondence to DDC shall be sent directly to the Resident Engineer at the job site.

1.9 CONTRACTOR'S DAILY REPORTS:

The Contractor shall prepare and submit Daily Construction Progress Reports as outlined in Section 01 32 00, CONSTRUCTION PROGRESS DOCUMENTATION.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 31 00

SECTION 01 32 00
CONSTRUCTION PROGRESS DOCUMENTATION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY

- A. This Section includes administrative and procedural requirements for establishing an effective base line schedule for the project and documenting the progress of construction during performance of the Work by developing, revising as necessary, various documents including but not limited to the following:
1. Baseline Construction Schedule.
 2. Composite Schedule for entire project
 3. Recovery Composite Schedule
 4. Revised and/or updated Composite Schedule
 5. Submittals Schedule.
 6. Daily construction reports.
 7. Material location reports.
 8. Field condition reports.
 9. Special reports.
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
 2. Section 01 32 22 PHOTOGRAPHIC DOCUMENTATION
 3. Section 01 33 00 SUBMITTAL PROCEDURES
 4. Section 01 40 00 QUALITY REQUIREMENTS

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.



- C. **Baseline Construction Schedule:**
A horizontal bar chart type schedule (Microsoft Project OR similar program) listing all the activities and their duration for entire contract duration OR construction period, including logical ties and interrelations between the activities necessary for the timely and successful completion of the project. Critical path activities shall be clearly marked. The Baseline construction schedule is a preliminary schedule that must be reviewed and approved by the Resident Engineer.
- D. **Composite Schedule:**
A composite horizontal bar chart type schedule (Microsoft Project OR similar program) listing all activities to be performed by the Contractor and its subcontractors, the duration of each activity including logical ties and interrelations between activities, and the sequence of each of necessary activities for the timely and successful completion of the project within the stipulated contract duration. Critical path activities shall be clearly marked. The Composite schedule must be signed and submitted by the Contractor within thirty (30) calendar days after the date established for commencement of the Contract, unless otherwise directed. The Composite Schedule must be reviewed and approved by the Resident Engineer.
- E. **Recovery Composite Schedule:** A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order.

A Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions. In such case special attention must be given to keep the delays as minimum as possible and must establish the nature of efforts such as extended hours of work, weekend work, accelerated fabrication, required action(s) or effort(s) by the Contractor, its subcontractors consultants, clients, end users and/or other concerned parties.

Such schedule must be prepared and submitted within Five (5) calendar days of request by the Resident Engineer. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.
- F. **Revised and/or Updated Composite Schedule:**

A Baseline construction schedule OR Composite Schedule OR Recovery Composite Schedule for the project that shows the actual duration of all the completed activities, including duration of and the reasons for delays, if any has occurred, AND revisions to all remaining activities of the Contractor and its subcontractors, including changes, if any, to logical ties, interrelations and the sequence of each of the outlined activities. Any such revisions should be shown on the row just below the approved schedule of the respective activity so that revisions can be compared.

The Revised and/or updated Composite Schedule must be reviewed and approved by the Resident Engineer.
- G. **Activity:** A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.
- H. **Event:** The starting or ending point of an activity.
- I. **Fragment:** A part of the activity that breaks down activities into smaller activities for greater detail.
- J. **Milestone:** A key or critical point in time for reference or measurement.
- K. **Network Diagram:** A graphic diagram of a network schedule, showing activities and activity relationships.

PART II – PRODUCTS

2.1 BASELINE CONSTRUCTION SCHEDULE:

- A. The Contractor shall prepare a Baseline horizontal bar-chart-type construction schedule for the project. Submit the Baseline Construction Schedule to the Resident Engineer within (15) fifteen calendar days after the date established for commencement of the Contract, unless directed otherwise. The Baseline Schedule must be reviewed and approved by the Resident Engineer.
1. Provide a separate time bar for each significant construction activity. Coordinate each activity on the schedule with other construction activities for proper interrelationship & sequence.
 2. Duration: The duration of each activity on the schedule besides installation must clearly show required duration of filing for permits, inspections, testing, approvals, shop drawings and materials submittals and approvals, fabrication, delivery, phasing for each construction activity.
 3. Schedule shall be time-scaled in not more than weekly increments, with the dates of the first day (Monday) of each week indicated.
 4. Completion of all the project activities shall be indicated in advance of the date established for completion of the Contract, allowing time for required inspection and punch list work.
 5. Clearly show time bar for all the tasks, to be completed before start of physical work of scheduled activities, including but not limited to obtaining required permit, subcontractor approval, submission and approval of shop drawings, field verification, time for fabrication and delivery, testing of materials and/or samples, preparation and approval of mock-up sample, curing, pre-testing of soil, pre-testing of equipment - including start up, testing & adjusting, filing for inspection by regulatory agencies, training, final use, etc. required to maintain orderly progress of the activity. A special consideration must be given to those activities requiring early approvals because of long lead-time for manufacture or fabrication.
 6. Phasing: Arrange all activities in proper sequence to reflect requirements for phased completion, work by other entities, work by the City, City furnished items, coordination with existing work, limitations arising due to continued occupancies, non-interruptible services, partial completion for occupancy, site restrictions, provisions for future work, seasonal variations, environmental control, and similar conditions of the project.
 7. Arrange all activities and/or show interrelationship and logical sequence of all activities, determine and mark all critical path activities including any phasing reflecting actual project condition.
 8. Keep at least two blank horizontal bars between all activities for recording actual progress and submitting Revised Schedule as defined in Sub-Section 1.3 G
 9. If necessary a new revised schedule shall be prepared in the same manner as outlined above.

2.2 COMPOSITE SCHEDULE FOR THE PROJECT:

- A. The Contractor shall prepare a Composite Schedule based on the approved Baseline Schedule. Such schedule shall indicate graphically and chronologically the start and completion of each and every activity, including all the pre-activity and post activity tasks. Keep at least two blank horizontal bars between all activities for recording actual progress and/or revisions.
1. If necessary the Contractors shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Composite Schedule. The Composite Schedule must be finalized and signed by the Contractor within (30) thirty calendar days after the date established for commencement of the Contract, unless directed otherwise. The Composite Schedule must be reviewed and approved by the Resident Engineer.



2.3 RECOVERY COMPOSITE SCHEDULE:

- A. A Recovery Composite Schedule is not required unless the City issues an Acceleration Change Order. A Recovery Composite Schedule outlining and incorporating extraordinary efforts required to recover lost time with the aim of achieving completion of the project within the stipulated contract duration, plus authorized time extensions, must be developed and submitted within (5) five calendar days of the request by the Resident Engineer. Such Recovery Composite Schedule shall include all information as defined in Article 1.3 F and shall be prepared in the same manner as outlined in Sub-Sections 2.1 and 2.2. The Recovery Composite Schedule must be reviewed and approved by the Resident Engineer.

2.4 REVISED AND/OR UPDATED COMPOSITE SCHEDULE:

- A. The Contractor shall revise and/or update the approved Composite Schedule as directed. The Revised schedule shall be prepared in the same manner as outlined above in Sub-Sections 2.1 and 2.2.
- B. The Contractor shall mark actual progress, delays, work stoppage etc. in the row just below the approved schedule for the respective activity so that revisions can be compared.
- C. Such schedule also shall indicate graphically and chronologically any revisions to the start and completion of the remaining activities including revisions to all the pre-activity and post activity tasks for all subcontractors.
- D. If necessary, the Contractor shall meet with each subcontractor and with the Resident Engineer to review and make warranted adjustments and finalize the Revised Composite Schedule. Once the schedule is finalized, the Contractor shall sign and date a reproducible form of the Schedule. Such schedule must be prepared and submitted by the Contractor within Five (5) calendar days of request by the Resident Engineer. The Revised Composite Schedule must be reviewed and approved by the Resident Engineer.

2.5 SUBMITTALS SCHEDULE:

- A. Preparation: The Contractor shall submit a schedule of submittals, arranged in chronological order by dates required by the construction schedule. Include time required for review, re-submittal, ordering, manufacturing, fabrication, and delivery when establishing dates.
- B. SCHEDULE F: Schedule F sets forth all submittal requirements for shop drawings and material samples. Schedule F is included in the Addendum. At the kick-off meeting, the Contractor must review this Schedule with the Resident Engineer and the Design Consultant. Within 10 days after the kick-off meeting, the Contractor must complete information on Schedule F concerning the submission date, the required delivery date and the fabrication time. For all required submittals of shop drawings and material samples, the Schedule F provided by the Contractor must indicate a submission date which is at least 20 business days prior to the date of the manufacture of the item or materials to be installed. In addition, if so directed by the Commissioner, the Schedule F provided by the Contractor must indicate a submission date for shop drawings and/or material samples of specified items or materials which is within 60 business days after the kick-off meeting. In the event of any conflict between the Specifications and Schedule F, Schedule F shall take precedence; provided, however, in the event of an omission from Schedule F (i.e., Schedule F omits either a reference to or information concerning a submittal requirement which is set forth in the Specifications), such omission from Schedule F shall have no effect and the Contractor's submittal obligation, as set forth in the Specifications, shall remain in full force and effect.
- C. Review: The Resident Engineer will review the Schedule F submitted by Contractor. Upon acceptance, the Resident Engineer will date and sign the schedule as approved and transmit it to the Design Consultant, Contractor and others within DDC as he/she deems appropriate.

2.6 REPORTS:

- A. Daily Construction Reports: The Contractor shall submit to the Resident Engineer written Daily Construction Reports at the end of each work day, recording basic information such as the date, day, weather conditions, and contract days passed, remaining contract duration/days and the following information concerning the Project.

Information: The reports shall be prepared by the Contractor's Superintendent and shall bear the Contractor's Superintendents signature. Each report shall contain the following information:

1. List of name of Contractor, subcontractors, their work force in each category, and details of activities performed.
2. The type of materials and/or major equipment being installed by the Contractor and/or by each subcontractor.
3. The major construction equipment being used by the Contractor and/or subcontractors.
4. Material and Equipment deliveries.
5. High and low temperatures and general weather conditions.
6. Accidents.
7. Meetings and significant decisions.
8. Unusual events.
9. Stoppages, delays, shortages, and losses.
10. Meter readings and similar recordings
11. Emergency procedures.
12. Orders and/or requests of authorities having jurisdiction.
13. Approved Change Orders received and implemented.
14. Field Orders and Directives received and implemented.
15. Services connected and disconnected.
16. Equipment or system tests and startups.
17. Partial Completions and occupancies.
18. Substantial Completions authorized.

NOTE: If there is NO ACTIVITY at site, a daily report indicating so and the reason for no activity at the site must be submitted.

- B. Material Location Reports: The contractor shall submit a Material Location Report at weekly OR monthly intervals as determined and established by the Resident Engineer. Such report shall include a comprehensive list of materials delivered to and stored at Project site. List shall be cumulative, showing materials previously reported plus items recently delivered. Include with list a statement of progress on and delivery dates for materials or items of equipment fabricated or stored away from Project site.
- C. Field Condition Reports: Immediately on discovery of a difference between field conditions and the Contract Documents, prepare and submit a detailed report. Submit a Request For Information (RFI) form with a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

2.7 SPECIAL REPORTS:

- A. Accident report, incident report, special condition report for the conditions out of control of any party involved with the project effecting project progress, explaining impact on the project schedule and cost if any.

PART III – EXECUTION (Not Used)
END OF SECTION 01 32 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text



SECTION 01 32 33
PHOTOGRAPHIC DOCUMENTATION

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SECTION 01 32 33

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract]

1.2 SUMMARY:

- A. This Section includes the following:
1. Photographic Media
 2. Construction Photographs
 3. Pre-construction Photographs
 4. Periodic Construction Progress Photographs
 5. Special Photographs
 6. DVD Recordings
 7. Final Completion Construction Photographs
- B. RELATED SECTIONS: include without limitation the following:
1. Section 01 10 00 SUMMARY
 2. Section 01 33 00 SUBMITTAL PROCEDURES
 3. Section 01 35 91 HISTORIC TREATMENT PROCEDURES
 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 5. Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS
- C. PHOTOGRAPHER - The Contractor shall employ and pay for the services of a professional photographer who shall take photographs showing the progress of the work for all Contracts.

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 SUBMITTALS:

- A. Qualification Data: For photographer.



- B. Key Plan: With each Progress Photograph Submittal include a key plan of Project site and building with notation of vantage points marked for location and direction of each image. Indicate location, elevation or story of construction. Include same label information as corresponding set of photographs.
- C. Construction Progress Photograph Prints: Take Progress Photographs bi-weekly and submit four color prints of each photographic view for each trade to the Resident Engineer. Such photographs shall be included in each monthly progress report or as otherwise directed by the Resident Engineer.
- D. Construction Photograph Negatives: Submit a complete set of photographic negatives in individually protected negative sleeves with each submittal of prints. Identify negatives with label matching photographic prints.
- E. Digital Images: If Digital Media is used, submit a complete set of digital color image electronic files on CD-ROM with each submittal of prints. Identify electronic media with date photographs were taken. Submit images that have same aspect ratio as the sensor, un-cropped.

1.5 QUALITY ASSURANCE:

- A. Photographer Qualifications: An individual who has been regularly engaged as a professional photographer of construction projects for not less than three years.

1.6 COORDINATION:

- A. The Contractor and its subcontractor(s) shall cooperate with the photographer and provide auxiliary services requested, including access to Project site and use of temporary facilities, including temporary lighting required to produce clear, well-lit photographs without obscuring shadows.

1.7 COPYRIGHT:

- A. The Contractor shall include the provisions set forth below in the agreement between the Contractor and the Photographer who will provide the construction photographs described in this section. The Contractor shall submit to the Resident Engineer a copy of its agreement with the Photographer.
- B. Any photographs, images and/or other materials produced pursuant to this Agreement, and any and all drafts and/or other preliminary materials in any format related to such items produced pursuant to this Agreement, shall upon their creation become the exclusive property of the City.
- C. Any photographs, images and/or other materials provided pursuant to this Agreement ("Copyrightable Materials") shall be considered "work-made-for-hire" within the meaning and purview of Section 101 of the United States Copyright Act, 17 U.S.C. § 101, and the City shall be the copyright owner thereof and of all aspects, elements and components thereof in which copyright protection might exist. To the extent that the Copyrightable Materials do not qualify as "work-made-for-hire," the Photographer hereby irrevocably transfers, assigns and conveys exclusive copyright ownership in and to the Copyrightable Materials to the City, free and clear of any liens, claims, or other encumbrances. The Photographer shall retain no copyright or intellectual property interest in the Copyrightable Materials. The Copyrightable Materials shall be used by the Photographer for no purpose other than in the performance of this Agreement without the prior written permission of the City. The Department may grant the Photographer a license to use the Copyrightable Materials on such terms as determined by the Department and set forth in the license.
- D. The Photographer acknowledges that the City may, in its sole discretion, register copyright in the Copyrightable Materials with the United States Copyright Office or any other government agency authorized to grant copyright registrations. The Photographer shall fully cooperate in this effort, and agrees to provide any and all documentation necessary to accomplish this.



- E. The Photographer represents and warrants that the Copyrightable Materials: (i) are wholly original material not published elsewhere (except for material that is in the public domain); (ii) do not violate any copyright Law; (iii) do not constitute defamation or invasion of the right of privacy or publicity; and (iv) are not an infringement, of any kind, of the rights of any third party. To the extent that the Copyrightable Materials incorporate any non-original material, the Photographer has obtained all necessary permissions and clearances, in writing, for the use of such non-original material under this Agreement, copies of which shall be provided to the City.

PART II – PRODUCTS

2.1 PHOTOGRAPHIC MEDIA:

- A. Photographic Film: Medium format, 2-1/4 by 2-1/4 inches (60 by 60 mm).
- B. Digital Images:
1. Construction Progress Images: Color images in JPEG format with minimum sensor size of 1.3 megapixels.
 2. Presentation Quality Images: Provide Color images in uncompressed TIFF format, produced by a digital camera with minimum sensor size of 4.0 megapixels, and at an image resolution of not less than 1024 by 768 with 8"x10" original capture at 300 dpi or greater.
- C. Prints:
1. Format: 8-by-10-inch (203-by-254-mm) smooth-surface matte color prints on single-weight commercial-grade stock paper, with 1inch wide margins and punched for standard 3-ring binder.
 2. Identification: On the front of each photograph affix a label in the margin with Project name and date photograph was taken. On the back of each print, provide an applied label or rubber-stamped impression with the following information:
 - a. Project Contract I.D. Number.
 - b. Project Contract Name.
 - c. Name of Contractor. (and Subcontractor Trade Represented)
 - d. Subject of Image Taken.
 - e. Date and time photograph was taken if not date stamped by camera.
 - f. Description of vantage point, indicating location, direction and other pertinent information.
 - g. Unique sequential identifier.
 - h. Name and address of photographer.

PART III – EXECUTION

3.1 CONSTRUCTION PHOTOGRAPHS:

- A. General: Take photographs using the maximum range of depth of field, and that are in focus, to clearly show the Work. Photographs with blurry or out-of-focus areas will not be accepted.
1. Maintain key plan with each set of construction photographs that identifies each photographic location and direction of view.
- B. Film Images:
1. Date Stamp: Unless otherwise indicated, date and time stamp each photograph as it is being taken so stamp is integral to photograph.



2. Field Office Prints: Retain one set of prints of progress photographs in the field office at Project site, available at all times for reference. Identify photographs same as for those submitted to Commissioner.
- C. Digital Images: Submit digital images exactly as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
1. Date and Time: Include date and time in filename for each image.
 2. Field Office Images: Maintain one set of images on CD-ROM in the field office at Project site, available at all times for reference. Identify images same as for those submitted to Commissioner.

3.2 PRE-CONSTRUCTION & PRE-DEMOLITION PHOTOGRAPHS:

- A. Before commencement of Contract work at the site, take color photographs of Project site and surrounding properties, including existing structures or items to remain during construction, from different vantage points, as directed by the Resident Engineer.
1. Flag applicable excavation areas and construction limits before taking construction photographs.
 2. Take photographs of minimum eight (8) views to show existing conditions adjacent to property before starting the Work.
 3. Take applicable photographs of minimum eight (8) views of existing buildings either on or adjoining property to accurately record physical conditions at start of construction.
 4. Take additional photographs as required or directed by the Resident Engineer to record settlement or cracking of adjacent structures, pavements, and improvements.
- B. Demolition Operations: Take photographs as directed by the Resident Engineer of minimum of eight (8) views each before commencement of demolition operations, at mid-point of operations and at completion of operations.
- C. Pre-Demolition Photographs: Take archival quality color photographs, to include all exterior building facades, of all structures at the Project site designated to be fully demolished or removed in compliance with NYC Building Code requirements. Submit four (4) complete sets of pre-demolition photographs, in the format specified herein, to the Resident Engineer for submission to the Department of Buildings.

3.3 PERIODIC CONSTRUCTION PROGRESS PHOTOGRAPHS:

- A. Take photographs of minimum eight (8) views bi-weekly as directed by the Resident Engineer of construction progress for each contract trade. Select vantage points to show status of construction and progress since last photographs were taken.

3.4 SPECIAL PHOTOGRAPHS:

- A. The photographer shall take special photographs of subject matter or events as specified in other sections of the Project Specifications from vantage points specified or as otherwise directed by the Resident Engineer.
- B. Historical Elements: As required in Section 01 35 91, HISTORIC TREATMENT PROCEDURES, for Contract work at designated landmark structures or sites the photographer, as specified and required by individual sections of the Contract documents or at the direction of the Commissioner, shall take images of existing elements scheduled to be removed for replacement, repair or replication in quantities as directed, including post-construction photographs of completed work as directed by the Commissioner.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

1. Take Presentation Quality Photographs of designated landmark structures as directed by the Commissioner for submission to the New York City Landmarks Preservation Commission. Provide a minimum of four color photographic prints of each view as directed.

3.5 DVD RECORDING:

- A. When DVD Recording of Demonstration and Training sessions is required for Non-Commissioned projects the Contractor shall provide the services of a Videographer as indicated in Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

3.6 FINAL COMPLETION CONSTRUCTION PHOTOGRAPHS:

- A. Take color photographs of minimum eight (8) unobstructed views of the completed project or project and site, as directed by the Commissioner and after all scaffolding, hoists, shanties, field offices or other temporary work has been removed and final cleaning is done after date of Substantial Completion for submission as Project Record Documents. Submit four (4) sets of each view of Presentation Quality photographic prints including negatives and/or digital images electronic file

END OF SECTION 01 32 33



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

**SECTION 01 33 00
SUBMITTAL PROCEDURES**

PART I – GENERAL:

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Coordination Drawings, Catalogue Cuts, Material Samples and other submittals required by the Contract Documents.
- B. Review of submittals does not relieve the Contractor of responsibility for any Contractor's errors or omissions in such submittals, nor from responsibility for complying with the requirements of the Contract.
- C. Responsibility of the Contractor: The approval of Shop Drawings will be general and shall not relieve the Contractor of responsibility for the accuracy of such Shop Drawings, nor for the proper fitting and construction of the work, nor of the furnishing of materials or work required by the Contract and not indicated on the Shop Drawings. Approval of Shop Drawings shall not be construed as approving departures from the Contract Drawings, Supplementary Drawings or Specifications.
- D. This Section includes the following:
 - 1. Definitions
 - 2. Submission Procedures
 - 3. Coordination Drawings
 - 4. LEED Submittals
 - 5. Ultra Low Sulfur Diesel Fuel Reporting
 - 6. Construction Photographs and DVD Recordings
 - 7. As-Built Documents

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 32 00 | CONSTRUCTION PROGRESS DOCUMENTATION |
| D. | Section 01 32 33 | PHOTOGRAPHIC DOCUMENTATION |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |
| G. | Section 01 81 13 | SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Submittals: Written and graphic information that requires responsive actions and includes without limitation all shop drawings, product data, letters of certification, tests and other information required for quality control and as required by the Contract Documents.
- D. Informational Submittals: Written information that does not require responsive action. Submittals may be rejected for non-compliance with the Contract.
- E. Shop Drawings: Include drawings, diagrams, illustrations, schedules, performance charts, brochures, and other data, except for coordination drawings, specifically prepared for the project by the Contractor or any subcontractor, manufacturer, supplier or distributor, which illustrates how specific portions of the work shall be fabricated and/or installed.
- F. Coordination Drawings: As required in Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION.
- G. Product Data and Quality Assurance Submittals: Includes manufacturer's standard catalogs, pamphlets and other printed materials including without limitation the following:
 - 1. Catalogue and Product specifications
 - 2. Installation instructions
 - 3. Color charts
 - 4. Catalog cuts
 - 5. Rough-in diagrams and templates
 - 6. Wiring diagrams
 - 7. Performance curves
 - 8. Operational range diagrams
 - 9. Mill reports
 - 10. Design data and calculations
 - 11. Certification of compliance or conformance
 - 12. Manufacturer's instructions and field reports

1.5 COORDINATION DRAWINGS:

- A. The Contractor shall provide reproducible Coordination Drawing(s) of the reflective ceiling showing the integration of all applicable contract work, including general construction work as well as trade work (Plumbing, HVAC, and Electrical) to be performed by subcontractors. The Coordination Drawing(s) shall include, without limitation, the following information:
 - 1. General Construction work showing the reflective ceiling plan including starting points, ceiling and beam soffits elevations, ceiling heights, roof openings, etc.
 - 2. HVAC Contract work showing ductwork, heating and sprinkler piping, location of grilles, registers etc. and access doors in hung ceilings. Locations shall be fixed by elevations and dimensions from column centerlines and/or walls.
 - 3. Plumbing Contract work including piping, valves, cleanouts etc., indicating locations and elevations and shall indicate the necessary access doors.
 - 4. Electrical Contract work indicating fixtures, large conduit runs, clearances, pull boxes, junction boxes, sound system speakers, etc.
- B. The Contractor shall issue the completed Coordination Drawing(s) to the Resident Engineer for his/her review. The Resident Engineer may call as many meetings as necessary with the Contractor, including

attendance by applicable subcontractors, and may call on the services of the Design Consulting where necessary, to resolve any conflicts that become apparent.

- C. Upon resolution of any conflicts, the Contractor shall provide a final Coordination Drawing(s) which will become the Master Coordination Drawing(s). The Master Coordination Drawing(s) shall be signed and dated by the Contractor to indicate acceptance of the arrangement of the work.
- D. A reproducible copy of the Master Coordination Drawing(s) shall be provided by the Contractor to each of the appropriate subcontractor(s), the Resident Engineer and the Design Consultant for information.
- E. Shop Drawings shall not be submitted prior to acceptance of the final coordinated drawings and shall be prepared in accordance with the Master Coordination Drawing(s). No work will be permitted without accepted Shop Drawings. It is therefore essential that this procedure be instituted as quickly as possible.

1.6 SUBMITTAL PROCEDURES:

- A. Refer to Section 01 35 03 GENERAL MECHANICAL REQUIREMENTS and Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS for additional submittal requirements involving electrical and mechanical work or equipment of any nature called for the project.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activities, with the Submittal Schedule specified in Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION.
 - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
 - 3. The Commissioner reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Submittals Schedule: The Submittals Schedule is set forth in Schedule F, which is included in the Addendum.
- D. Identification: Place a permanent label or title block on each submittal for identification.
 - 1. Indicate name of firm or entity that prepared each submittal on label or title block.
 - 2. Provide a space approximately 6 by 8 inches on label or beside title block to record Contractor's review and approval markings and action taken by Design Consultant.
 - 3. Include the following minimum information on label for processing and recording action taken:
 - a. Project name, DDC Project Number and Contract Number
 - b. Date.
 - c. Name and address of Design Consultant.
 - d. Name and address of Contractor.
 - e. Name and address of subcontractor.
 - f. Name and address of supplier.
 - g. Name of manufacturer.
 - h. Submittal number or other unique identifier, including revision identifier.
 - i. Number and title of appropriate Specification Section.
 - j. Drawing number and detail references, as appropriate.
 - k. Location(s) where product is to be installed, as appropriate.
 - l. Other necessary identification.
- E. Transmittal:
 - 1. Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form in triplicate. Transmittals received from sources other than the



Contractor will be returned without review. Re-submission of the same drawings or product data shall bear the original number of the prior submission and the original titles.

2. Transmittal Form: Provide locations on form for the following information:

- a. Project name, DDC Project number and Contract Number
- b. Date.
- c. Destination (To:).
- d. Source (From:)
- e. Names of Contractor, subcontractor, manufacturer, and supplier.
- f. Category and type of submittal.
- g. Submittal purpose and description.
- h. Specification Section number and title.
- i. Drawing number and detail references, as appropriate.
- j. Transmittal number, numbered consecutively.
- k. Submittal and transmittal distribution record.
- l. Remarks.
- m. Signature of transmitter.

F. Shop Drawings:

1. Procedures for Preparing, Forwarding, Checking and Returning all Shop Drawings shall be, generally, as follows:

- a. The Contractor shall make available to its subcontractors the necessary Contract Documents and shall instruct such subcontractor to determine dimensions and conditions in the field, particularly with reference to coordination between the trade subcontractors. The Contractor shall direct its subcontractors to prepare Shop Drawings for submission to the Design Consultant in accordance with the requirements of these General Conditions. The Contractor shall also direct its subcontractors to "Ring Up" corrections made on all re-submissions for approval, so as to be readily seen, and that the symbol "sub" be used to identify the source of the correction or information that has been added.

The Contractor shall:

1. Review and be responsible to the Commissioner, for information shown on its subcontractor's Shop and Installation drawings and manufacturers' data, and also for conformity to Contract Documents.
 2. "Ring Up" corrections made on all submissions for approval, so as to be readily seen, and that the symbol "GC", "PL", "HVAC" or "EL" be used to indicate that the correction and/or information added was made by the Contractor and/or its subcontractor(s).
 3. Clearly designate which entity is to perform the work when the term, "work by others" or other similar phrases are indicated on the Contract Drawings before submission to the Design Consultant.
 4. Stamp submissions "Recommended for Acceptance", date and forward to the Design Consultant.
2. The Contractor shall promptly prepare and submit project specific layout detail and Shop Drawings of such parts of the work as are indicated in the Specifications, Schedule F of the Addendum or as required. These Shop Drawings shall be made in accordance with the Contract Drawings, Specifications and Supplementary Drawings, if any. The Shop Drawings shall be accurate and distinct and give all the dimensions required for the fabrication, erection and installation of the work.
3. Size of Drawings: The Shop Drawings, unless otherwise directed, shall be on sheets of the same size as the Contract Drawings, drawn accurately and of sufficient scale to be legible, with a one half (1/2) inch marginal space on each side and a two (2) inch marginal space for binding on the left side.



4. Scope of Drawings: Shop Drawings shall be numbered consecutively and shall accurately and distinctly represent all aspects of the work, including without limitation the following:
 - a. All working and erection dimensions.
 - b. Arrangements and sectional views.
 - c. Necessary details, including performance characteristics, and complete information for making necessary connections with other work.
 - d. Kinds of materials including thickness and finishes.
 - e. Identification of products.
 - f. Fabrication and installation drawings.
 - g. Roughing-in and setting diagrams.
 - h. Wiring diagrams showing field-installed wiring, including power, signal, and control wiring.
 - i. Shop work manufacturing instructions.
 - j. Templates and patterns.
 - k. Schedules.
 - l. Design calculations.
 - m. Compliance with specified standards.
 - n. Notation of coordination requirements.
 - o. Notation of dimensions established by field measurement.
 - p. Relationship to adjoining construction clearly indicated.
 - q. Seal and signature of professional engineer if specified.
 - r. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
 - s. All other information necessary for the work and/or required by the Commissioner.
5. Titles and Reference: Shop Drawings shall be dated and contain:
 - a. Name of the Project, DDC Project Number and Contract Number.
 - b. The descriptive names of equipment, or materials covered by the Contract Drawings and the classified item number or numbers, if any, under which it is, or they are required.
 - c. The locations or points and sequence at which materials, or equipment, are to be installed in the work.
 - d. Cross references to the section number, detail number and paragraph number of the Contract Specifications.
 - e. Cross references to the sheet number, detail number, etc., of the Contract Drawings.
6. Field Measurements: In addition to the above requirements, the Shop Drawings shall be signed by the Contractor and, if applicable, the subcontractor responsible for preparation of the Shop Drawings. Each Shop Drawing shall be stamped with the following wording:

FIELD MEASUREMENTS: The Contractor certifies that it has verified and supplemented the Contract Drawings by taking all required field measurements, which said measurements correctly reflect all field conditions and that this Shop Drawing incorporates said measurements.
7. Contractor's Statement with Submittal: Any Submittal by the Contractor for acceptance, including without limitation, all dimensional drawings of equipment, blueprints, catalogues, models, samples and other data relative to the equipment, the materials, the work or any part thereof, must be accompanied by a statement that the Submittal has been examined by the Contractor and that everything shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If there is any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, the Contractor shall, in its statement, list and clearly describe each such discrepancy.

Acceptance will be given based upon the Contractor's representation that what is shown in the Submittal is in accordance with the requirements of the Contract Drawings and Specifications. If



the Contractor's statement indicates any discrepancy between what is shown in the Submittal and the requirements of the Contract Drawings and Specifications, such change is subject to review and prior written acceptance by the Design Consultant. In addition, such change may require a change order in accordance with Article 25 of the Contract. In the event any such change is approved, any additional expense or increased cost in connection with the change is the sole responsibility of the Contractor.

8. Submission of Shop Drawings:

- a. Initial Submission: The Contractor shall submit seven (7) copies of each Shop Drawing to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Shop Drawings to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory Shop Drawing will be stamped "No Exceptions Taken", be dated and distributed by the Design Consultant as follows:
- 1) Two (2) copies thereof will be returned to the Contractor by letter.
 - 2) Three (3) copies of the approved Shop Drawing and copy of the transmittal letter to the Contractor will be forwarded to DDC.
 - 3) One copy will be retained by the Design Consultant.
 - 4) One copy will be forwarded / retained by sub-consultant(s) as appropriate.

Should the Shop Drawing(s) be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return the Shop Drawings to the Contractor with the necessary corrections and changes to be made as indicated thereon.

- b. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each shop drawing to the Design Consultant. The Contractor shall revise and resubmit the Shop Drawing as required by the Design Consultant until the Shop Drawings are stamped "No Exceptions Taken". However, Shop Drawings which have been stamped "Make Corrections Noted" shall be considered an "Acceptable" Shop Drawing and NEED NOT be resubmitted.
- c. Commencement of Work: No work or fabrication called for by the Shop Drawings shall be done until the acceptance of the said drawings by the Design Consultant is given. In addition to the foregoing Shop Drawing transmissions, a copy of any Shop Drawing prepared by any of the Contractor's subcontractors which Shop Drawing indicated work related to, adjacent to, impinging upon, or affecting work to be done by other subcontractors shall be transmitted to the subcontractors so affected. [These accepted Shop Drawings shall be distributed to the affected subcontractors when required with a copy of the transmittal to the Resident Engineer.]
- d. Variations: If the Shop Drawings show variations from the Contract requirements because of standard shop practice or other reasons, the Contractor shall make specific mention of such variations in its letter of submittal. Acceptance of the Shop Drawings shall constitute acceptance of the subject matter thereof only and not of any structural apparatus shown or indicated.

G. Product Data:

1. General: Except as otherwise prescribed herein, the submission, review and acceptance of Product Data and Catalogue cuts shall conform to the procedures specified in Sub-Section 1.6 F, Shop Drawings.
2. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
3. Mark each copy of each submittal to show which products and options are applicable.
4. Include the following information, as applicable:

- a. Manufacturer's written recommendations.
 - b. Manufacturer's product specifications.
 - c. Manufacturer's installation instructions.
 - d. Standard color charts.
 - e. Manufacturer's catalog cuts.
 - f. Wiring diagrams showing factory-installed wiring.
 - g. Printed performance curves.
 - h. Operational range diagrams.
 - i. Mill reports.
 - j. Standard product operation and maintenance manuals.
 - k. Compliance with specified referenced standards.
 - l. Testing by recognized testing agency.
 - m. Application of testing agency labels and seals.
 - n. Notation of coordination requirements.
5. Submit Product Data before or concurrent with Samples.
6. Submission of Product Data:
- a. Initial Submission: The Contractor shall submit seven (7) sets of Product Data to the Design Consultant for his/her review and acceptance. The Design Consultant will transmit Product Data to appropriate sub-consultants for review and acceptance, including Commissioning Authority/Agent as applicable. A satisfactory catalogue cut will be stamped "No Exception Taken", be dated and distributed as follows:
 - 1) Two (2) copies thereof will be returned to the Contractor by letter.
 - 2) Three (3) copies of the Product Data and copy of the transmittal letter to the Contractor will be forwarded to DDC
 - 3) One copy will be retained by the Design Consultant.
 - 4) One copy will be forwarded / retained by sub-consultant(s) as appropriate.Should the Product Data be "Rejected" or noted "Revise and Resubmit" by the Design Consultant, the Design Consultant will return one (1) set of such Product Data to the Contractor with the necessary corrections and changes to be made indicated and one (1) set to DDC.
7. Revisions: The Contractor must make such corrections and changes and again submit seven (7) copies of each Product Data for the review of the Design Consultant. The Contractor shall revise and resubmit the Product Data as required by the Design Consultant until the submission is stamped "No Exceptions Taken" by the Design Consultant. However, Product Data which has been stamped "Make Corrections Noted" shall be considered an "Accepted" Product Data and NEED NOT be resubmitted.
- H. Samples of Materials:
1. For samples of materials involving electrical work of any nature, refer to Section 00 35 06 - General Electrical Requirements.
 2. Samples shall be in triplicate, of sufficient size to show the quality, type, range of color, finish and texture of the material.
 3. Each of the samples shall be labeled as follows:
 - a. Name of the Project, DDC Project Number and Contract Number.
 - b. Name and quality of the material.
 - c. Date.



- d. Name of Contractor, subcontractor, manufacturer and supplier.
- e. Related Specification or Contract Drawing reference to the samples submitted.
4. A letter of transmittal, in triplicate, from the Contractor requesting acceptance must accompany all such samples.
5. Transportation charges to the Design Consultant's office must be prepaid on all samples forwarded.
6. Samples for testing purposes shall be as required in the Specifications.
7. Samples on Display: When samples are specified to be equal to approved product, they shall be carefully examined by the Contractor and by those whom the Contractor expects to employ for the furnishing of such materials.
8. Timely Submissions Log/Schedule: Samples shall be submitted in accordance with approved Shop Drawing log so as to permit proper consideration without delaying any operation under the project. Materials should not be ordered until acceptance is received, in writing, from the Design Consultant. All materials shall be furnished equal in every respect to the accepted samples.
9. The Acceptance of any samples will be given as promptly as possible, and shall be only for the characteristic color, texture, strength, or other feature of the material named in such approval, and no other. When this approval is issued by the Design Consultant, it is done with the distinct understanding that the materials to be furnished will fully and completely comply with the Specifications, the determination of which may be made at some later date by a laboratory test or by other procedure. Use of materials will be permitted only so long as the quality remains equal to the approved samples and complies in every respect with the Specifications, and the colors and textures of the samples on file in the office of the Design Consultant, for the project.
10. Acceptability of test Data: The Commissioner will be the final judge as to acceptability of laboratory test data and performance in service of materials submitted.
11. Valuable Samples: Valuable samples, such as hardware, plumbing and electrical fixtures, etc., not destroyed by inspection or test, will be returned to the Contractor and may be incorporated into the work after all questions of acceptability have been settled, providing suitable permanent records are made as to the location of the samples, their properties, etc.
12. Equivalent Quality: Any material, article and/or equipment which is designated in the Drawings and/or Specifications by a number in the catalogue of any manufacturer or by a manufacturer's grade or trade name is designated for the purpose of describing the material, article and/or equipment and fixing the standard of performance and/or function, as well as the quality and/or finish. Any material, article and/or equipment which is other than what is specified in the Drawings and/or Specifications will only be accepted if the Commissioner makes a written determination that such material, article and/or equipment is equivalent to that which is specified in the Drawings and/or Specifications.
13. The submission of any material, article and/or equipment as the equal of any material, article and/or equipment set forth in the Drawings and/or Specifications as a standard shall be accompanied by any and all information essential for determining whether such proposed material, article and/or equipment is equivalent to that which is specified. Such information shall include, without limitation, illustrations, drawings, descriptions, catalogues, records of tests, samples, as well as information regarding the finish, durability and satisfactory use of such proposed material, article and/or equipment under similar operating conditions.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.7

1.7 LEED SUBMITTALS:

- A. Comply with submittal requirements specified in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL; Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS; Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS; Section 01 81 19, INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS and Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.
- B. LEED Building submittal information shall be assembled into one package per each applicable specification section, separate from all other non-LEED submittals. Each submittal package shall have a separate transmittal and identification as described in Sub-Section 1.6 herein.
- C. Number of Copies: Submit FOUR (4) copies of LEED submittals, in accordance with procedure described in Sub-Section 1.6 herein, unless otherwise indicated.
 - 1. LEED Submittals shall be clearly marked "LEED".
- D. Material Safety Data Sheets (MSDSs) for LEED Certification: Submit information necessary to show compliance with LEED certification requirements, which will be the limit of the Design Consultant's review for LEED compliance.
 - 1. Designated LEED submittals that include non-LEED MSDS data will not be reviewed. The entire submittal will be returned for re-submission.
- E. Product Cut Sheets and/or Shop Drawings for LEED Certification: Provide product cut sheets and/or shop drawings with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project. For detailed requirements refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.
 - 1. Provide the quantity, length, area, volume, weight, and/or cost of each product submitted as required to satisfy LEED documentation requirements. Refer to Sub-Section 1.6 of Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED PROJECTS.

1.8 ULTRA LOW SULFUR DIESEL FUEL AND BEST AVAILABLE TECHNOLOGY REPORTING:

- A. In accordance with Section 01 10 00 Summary, Sub-Section 1.5 E, the Contractor shall submit reports to the Commissioner regarding the use of Ultra Low Sulfur Diesel Fuel and Best Available Technology (BAT) in Non road Vehicles. Submission of such reports shall be in accordance with the schedule, format, directions and procedures established by the Commissioner.

1.9 CONSTRUCTION PHOTOGRAPHS AND DVD RECORDINGS:

- A. Submit construction progress photographs and DVD recordings in accordance with requirements of Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION

1.10 AS-BUILT DOCUMENTS:

- A. Submit all as-built documents in accordance with Section 01 78 39 CONTRACT RECORD DOCUMENTS.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 33 00



SECTION 01 35 03

GENERAL MECHANICAL REQUIREMENTS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 03

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. The General Mechanical Requirements contained herein shall be followed by the Contractor, as well as its subcontractor for HVAC work. This Section sets forth the General Requirements applicable to mechanical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 35 06 GENERAL ELECTRICAL REQUIREMENTS
- D. Section 01 42 00 REFERENCES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. CONCEALED PIPING AND DUCTS -: shall mean piping and ducts hidden from sight in masonry or other construction, in floor fill, trenches, partitions, hung ceilings, furred spaces, pipe shafts and in service tunnels not used for passage. Where piping and ducts run in areas that have hung ceilings, such piping and ducts shall be installed in the hung ceilings. For work on existing piping any insulation on such existing piping is to be tested for asbestos and abated, if found to be positive by a certified asbestos contractor. Such testing and abatement shall occur prior to the performance of any work on these pipes.

1.5 SUBMITTALS:

- A. INTENT OF MECHANICAL CONTRACT DRAWINGS – Mechanical Contract Drawings are in part diagrammatic and show the general arrangement of the equipment, ducts and piping included in the Contract and the approximate size and location of the equipment.
- B. The Contractor shall follow these Contract Drawings in laying out the work and verify the spaces in which it will be installed. The Contractor shall submit, as directed, Mechanical Shop Drawings, roughing drawings, manufacturer's Shop Drawings, field drawings, cuts, bulletins, etc., of all materials, equipment and methods of installation shown or specified in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.



1. Submit sheet metal shop standards. Submit manufacturer's product data including gauges, materials, types of joints, scaling materials and installations for metal ductwork materials and products.
2. Submit scaled layout drawing (3/8"=1') of metal ductwork and fittings including, but not limited to, duct sizes, locations, elevations, slopes of horizontal runs, wall and floor penetrations and connections. Show modifications of indicated requirements made to conform to local shop practice and how those modifications ensure that free area, materials and rigidity are not reduced. Layouts should include all the room plans, mechanical equipment rooms and penthouses. Method of attachment of duct hangers to building construction all with the support details. Coordinate shop drawings with related trades prior to submission.
3. Indicate duct fittings, particulars such as gauges, sizes, welds and configuration prior to start of work for low-pressure systems.
4. Submit maintenance data and parts lists for metal ductwork materials and products. Include this data, product data and shop drawings in maintenance manual.

1.6 ACCESSIBILITY:

All work shall be installed by the Contractor so as to be readily accessible for inspection, operation, maintenance and repair. Minor deviations from the arrangement indicated on the Contract Drawings may be made to accomplish this, but they shall not be made without approval by the Commissioner.

1.7 CHANGES IN PIPING, DUCTS, AND EQUIPMENT:

Wherever field conditions are such that for proper execution of the work, reasonable changes in location of piping, ducts and equipment are necessary and required, the Contractor shall make such changes as directed and approved, without extra cost to the City.

1.8 CLEANING OF PIPING, DUCTS, AND EQUIPMENT:

Piping, ducts and equipment shall be thoroughly cleaned by the Contractor of all dirt, cuttings and other foreign substances. Should any pipe, duct or other part of the several systems be obstructed by any foreign matter, the Contractor will be required to pay for disconnecting, cleaning and reconnecting wherever necessary for the purpose of locating and removing obstructions. The Contractor shall pay for repairs to other work damaged in the course of removing obstructions. For work on existing piping, ducts and equipment the Contractor shall pay special attention during this task so as not to disturb the insulation on such piping, ducts or equipment.

1.9 STANDARDIZATION OF SIMILAR EQUIPMENT:

Unless otherwise particularly specified, all equipment of the same kind, type or classification, and used for identical purposes, shall be the product of one (1) manufacturer.

1.10 SUPPORTING STRUCTURES DESIGNED BY THE CONTRACTOR:

Unless otherwise specified, supporting structures for equipment to be furnished by the Contractor shall be designed by an Engineer licensed in New York State retained by the Contractor. Supporting structures shall be built by the Contractor of sufficient strength to safely withstand all stresses to which they may be subjected, within permissible deflections, and shall meet the following standards:

- A. Structural Steel - ASTM Standard Specifications, AISC and New York City Construction Codes.



- B. Concrete for supports for equipment shall conform to the Specifications for concrete herein, but in no case shall be less than the requirements of the New York City Construction Codes for average concrete.
- C. Steel reinforcement for concrete shall be of intermediate grade and shall meet the requirements of the Standard Specifications for Billet Steel-Concrete Reinforcement Bars, ASTM.
- D. Drawings and calculations shall be submitted for review and acceptance in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

1.11 ELIMINATION OF NOISE:

- A. All systems and/or equipment provided under the Contract shall operate without objectionable noise or vibration.
- B. Should operation of any one or more of the several systems produce noise or vibration which is, in the opinion of the Commissioner, objectionable, the Contractor shall at its own expense make changes in piping, equipment, etc. and do all work necessary to eliminate objectionable noise or vibration.
- C. Should noise or vibration found objectionable by the Commissioner be transmitted by any pipe or portions of the structure from systems and/or equipment installed under the Contract, the Contractor shall at its own expense install such insulators and make such changes in or additions to the installations as may be necessary to prevent transmission of this noise or vibration.

1.12 PRELIMINARY FIELD TEST:

As soon as conditions permit, the Contractor shall furnish all necessary labor and materials for, and shall make, preliminary field tests of the equipment to ascertain compliance with the requirements of the Contract. If the preliminary field tests disclose equipment that does not comply with the Contract, the Contractor shall, prior to the acceptance test, make all changes, adjustments and replacements required.

1.13 INSTRUCTIONS ON OPERATION:

At the time the equipment is placed in permanent operation by the City, the Contractor shall make all adjustments and tests required by the Commissioner to prove that such equipment is in proper and satisfactory operating condition. The Contractor shall instruct the City's operating personnel on the proper maintenance and operation of the equipment for the period of time called for in the Specifications.

1.14 CERTIFICATES:

On completion of the work, the Contractor shall obtain certificates of inspection, approval, acceptance and of compliance with all laws from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES. The work shall not be deemed substantially complete until the certificates have been delivered.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 35 03



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text



SECTION 01 35 06
GENERAL ELECTRICAL REQUIREMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section sets forth the General Requirements applicable to electrical work for the Project. Such requirements are intended to be read in conjunction with the Specifications and Contract Drawings for the Project. In the event of any conflict between the requirements set forth in this Section and the requirements of the Project Specifications and/or the Contract Drawings, whichever requirement is the most stringent, as determined by the Commissioner, shall take precedence.
- B. This Section includes the following:
1. Procedure for Electrical Approval
 2. Submittals
 3. Electrical Installation Procedures
 4. Electrical Conduit System Including Boxes (Pull, Junction and Outlet)
 5. Electrical Wiring Devices
 6. Electrical Conductors and Terminations
 7. Circuit Protective Devices
 8. Distribution Centers
 9. Motors
 10. Motor Control Equipment
 11. Schedule of Electrical Equipment

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|---------------------------------|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| C. | Section 01 35 03 | GENERAL MECHANICAL REQUIREMENTS |
| D. | Section 01 42 00 | REFERENCES |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |

1.4 DEFINITIONS:

- A. **WIRING:** means both wire and raceway (rigid steel, heavy wall conduit unless specifically indicated otherwise).
- B. **POWER WIRING:** means wiring from a panel board or other specified source to a starter (if required) then to a disconnect (if required), then to the final point of usage such as a motor, unit or device.
- C. **CONTROL and/or INTERLOCK WIRING:** means that wiring that signals the device to operate or shut down in response to a signal from a remote control device such as a temperature, smoke, pressure, float,



etc. device (starters and disconnect switches are not included in this definition) regardless of the voltage required for the controlling device.

- D. RIGID STEEL CONDUIT: shall mean rigid steel, heavy wall conduit that is hot dipped galvanized inside and outside. The conduit shall meet the requirements of the latest edition, as amended, of the "Standard for Rigid Steel Conduit" of the Underwriters' Laboratories, Inc. Unless otherwise specified in the Specifications or indicated on the Contract Drawings, rigid steel conduit shall be used for all exposed work, for all underground conduits in contact with earth and for fire alarms systems, as required by the New York City Construction Codes.
- E. ELECTRICAL METALLIC TUBING (EMT): shall mean industry standard thin wall conduit of galvanized steel only. All elbows, bends, couplings and similar fittings which are installed as a part of the conduit system shall be compatible for use with electric metallic tubing. Couplings and terminating fittings shall be of the pressure type as approved by the Commissioner. Set screw fittings will not be acceptable. EMT shall meet the requirements of the latest edition, as amended, of the "Standard for Electrical Metallic Tubing of the Underwriters Laboratories Inc." EMT may only be used where specifically indicated. In no case will EMT be permitted in spaces other than hung ceilings and dry wall partitions.
- F. FLEXIBLE METALLIC CONDUIT (FMC): Shall mean a conduit made through the coiling of a self-interlocking ribbed strip of aluminum or steel, forming a hollow tube through which wires can be pulled. For final connections to motors and motorized equipment, not more than a 4' - 0" length of flexible conduit may be used. For watertight installations, this conduit shall be of a watertight type, attached with watertight glands or fittings for final connections from outlet box to recessed lighting fixtures and in locations only where specifically permitted by the Specifications or Contract Drawings.

1.5 PROCEDURE FOR ELECTRICAL APPROVAL:

This Sub-Section sets forth General Electrical information, as well as required approvals for all electrical work required for the Project, including ancillary electrical work which may be included in the work of other trade subcontractors.

- A. ELECTRIC SERVICE: The electric service supply is subject to commercial and operating variation of the utility company. Proper provision shall be made to have all apparatus operate normally under these conditions.
- B. ACCEPTANCE: Acceptance and approval of the work will be contingent upon the inspection and test of the installation by the City regulatory agency.
- C. TESTS: The Contractor shall notify the Commissioner when the Contractor has completed the work and is ready to have it inspected and tested. Upon completion of the work tests shall be made as required by the Commissioner of all electrical materials, electrical and associated mechanical equipment, and of appliances installed hereunder. The Contractor shall furnish all labor and material for such tests. Should the tests show that any of the material, appliances or workmanship is not first class or not in compliance with the Contract, the Contractor on written notice shall remove and promptly replace them with other materials in conformity with the Contract.
- D. CERTIFICATE OF THE BUREAU OF ELECTRICAL CONTROL, OF THE DEPARTMENT OF BUILDINGS (B.E.C.): The Contractor must file prior to requesting a substantial completion inspection a Certificate of Inspection issued by B.E.C. On completion of the work the Contractor shall obtain certificates of inspection, approval, acceptance and compliance from all agencies and/or entities having jurisdiction over the work and shall deliver these certificates to the Commissioner in accordance with Section 01 77 00 CLOSEOUT PROCEDURES.
- E. RESPONSIBILITY FOR CARE AND PROTECTION OF EQUIPMENT:
 - 1. The Contractor furnishing any equipment shall be responsible for the equipment until it has been finally inspected, tested and accepted, in accordance with the requirements of the Contract.

2. After delivery and before and after installation, the Contractor shall protect all equipment against theft, injury or damage from all causes. The Contractor shall carefully store all equipment received for work, which is not immediately installed. If any equipment has been subject to possible injury by water, it shall be thoroughly dried out and put through a special dielectric test as directed by the Commissioner, at the expense of the Contractor or replaced by the Contractor without additional cost to the City.
- F. UNIFORMITY OF EQUIPMENT: Any two (2) or more pieces of equipment, apparatus or materials of the same kind, type or classification which are intended to be used for identical types of service, shall be made by the same manufacturer.

1.6 SUBMITTALS:

A. CONTRACTOR'S ELECTRICAL DRAWINGS AND SAMPLES FOR APPROVAL:

1. The Contractor shall submit to the Commissioner for approval, in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, complete dimensional drawings of all equipment, wiring diagrams, motor test data, details of control, installation layouts showing all details and locations and including all schedules, and descriptions and supplementary data to comprise complete working drawings and instructions for the performance of the work. A description of the operation of the equipment and controls shall be included. A letter, in triplicate, shall accompany each submittal.
2. The Contractor shall submit in accordance with Section 01 33 00 SUBMITTAL PROCEDURES, duplicate samples of such materials and appliances as may be requested by the Commissioner for approval. These samples shall be properly tagged for identification and submitted for examination and test. After the samples are approved, one (1) sample will be returned to the Contractor and the other sample will be filed in the office of the Commissioner's representative for inspection use. After the Contract is completed, the second set of samples will be returned to the Contractor.

- B. TIMELINESS: All material shall be submitted in accordance with the submittal schedule in sufficient time for the progress of construction. Failure to promptly submit acceptable samples and dimensional drawings of equipment will not be accepted as grounds for an extension of time. The Commissioner may decline to consider submittals unless all related items are submitted at the same time.
- C. CONTRACTOR'S STATEMENT WITH SUBMITTALS: Contractor shall submit statement in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- D. BULLETINS AND INSTRUCTIONS: The Contractor shall furnish and deliver to the Commissioner in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS and Section 01 77 00, CLOSEOUT PROCEDURES, after acceptance of the work, four (4) complete sets of instructions, technical bulletins and any other printed matter (diagrams, prints, or drawings) required to provide complete information for the proper operation, maintenance and repair of the equipment and the ordering of spare parts.

PART II – PRODUCTS (Not Used)



PART III – EXECUTION

3.1 ELECTRICAL INSTALLATION PROCEDURES:

This Sub-Section sets forth the General Installation Procedure that shall apply to all electrical work and electrical equipment appearing in the Contract.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

- A. **INTENT OF CONTRACT DOCUMENTS:** The Drawings and Specifications are to be interpreted as a means of conveying the scope and intent of the work without giving every minor electrical detail. It is intended, nevertheless, that the Contractor shall provide whatever labor and materials are found necessary, within the scope of the Contract, for the successful operation of the installation. Specific details of individual installations are to be finally decided upon when the Contractor submits Working or Shop Drawings for approval to DDC. Whenever there are two (2) or more methods to complete project work within the Contract scope, the Commissioner reserves the right to choose that method which, in the Commissioner's opinion, will afford the most satisfactory performance, lasting qualities, and accessibility for repairs, even though this selection is the most costly.
- B. **SCHEMATIC PLANS – APPROXIMATE LOCATIONS:** Conduits and wiring are shown on the plans for diagrammatic purposes only. Therefore, conduit layouts may not necessarily give the actual physical route of the conduits. The Contractor who installs a conduit system will also be required, as part of the work, to furnish and install all hangers and pull-boxes, including any special pull-boxes found necessary to overcome interferences, and to facilitate the pulling of electrical cables. Similarly, the locations of equipment, appliances, outlets and other items shown on Contract Drawings are only approximate and are to be definitively established when equipment Shop Drawings are submitted and approved by DDC during construction.
- C. **SLEEVES:** required for conduits passing through walls or floors, shall be furnished and set by the Contractor installing the conduits. Sleeves in waterproofed floors shall be provided with flashing extending 12 inches in all directions from sleeve and secured to waterproofing. Flashing shall be turned down into space between pipe and sleeve and caulked watertight. Flashing shall be 20 oz. cold rolled copper. Sleeves shall be supplied with welded flanges similar to those supplied by the subcontractor for Plumbing Work and shall extend one (1) inch above finished floor.
- D. **COORDINATION:** The Contractor shall keep in close touch with the construction progress and obtain the necessary information for the accurate placement of its work in ample time before project construction operations obstruct its work. The Contractor is to consult all other Contract Drawings, as well as approved equipment Shop Drawings on file in the Resident Engineer's Field Office. This will aid in avoiding interferences, omissions and errors in the electrical installation.
- E. **RESTORATION:** If drilling or cutting is done on finished surfaces of equipment or the structure, any marring of the surface shall be repaired or replaced by the Contractor. The Contractor shall be held responsible for corrective restoration due to its cutting or drilling, and for any damage to the project or its contents caused by the Contractor or the Contractor's workers. If any piercing of waterproofing occurs because of the installation of the work, the Contractor shall restore the waterproofing, at its own expense, to the satisfaction of the Commissioner.
- F. **ELECTRICAL WORK AT SITE:** The Contractor furnishing equipment consisting of a number of related electrical devices or appliances, mounted in a single enclosure, or on a common base, shall furnish this unit complete with internal wiring, connections, terminal boxes with copper connectors and/or lugs and ample electrical leads, ready for connection and operation. The cost of any wiring, re-wiring or other work required to be done on this unit in the field, shall be borne by the Contractor, without additional cost to the City.
- G. **COOPERATION AMONG SUBCONTRACTORS:** Whenever an electrically operated unit or system involves the combined work of several subcontractors for its installation and successful operation, the

Contractor shall require each subcontractor to exercise the utmost diligence in cooperating with others to produce a complete, harmonious installation.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 ELECTRICAL CONDUIT SYSTEM INCLUDING BOXES (PULL, JUNCTION AND OUTLET):

This Sub-Section sets forth the requirements applying to the installation of electrical conduits, boxes or fittings. Rigid steel conduit shall be used throughout, unless otherwise directed by the Commissioner. Where the word 'conduit', without a modifier such as, rigid steel, EMT, etc., is specified to be used, it shall be interpreted to mean, rigid steel, heavy wall, threaded conduit.

(Refer to Sub-Section 1.4 DEFINITIONS for terms used in this section)

A. INSTALLATIONS AND APPLICATIONS:

1. Unless otherwise specified or indicated on the Contract Drawings, conduit runs shall be installed concealed in finished spaces.
2. CONDUIT SIZES: The sizes of conduit shall be as indicated on the Contract Drawings. Wherever conduit sizes are not indicated, the conduit shall meet the requirements of the New York City Electrical Code to accommodate the conductors to be installed therein.
3. Conduits shall be reamed smooth after cutting. No running threads will be permitted. Universal type couplings shall be used where required. Conduit joints shall be screwed up to butt. Empty conduits after installation shall have all open ends temporarily plugged to prevent the entrance of water or other foreign matter.
4. Conduits being installed in concrete or masonry shall be securely held in place during pouring and construction operations. A group of conduits terminating together shall be held in place by a template.
5. UNDERGROUND STEEL CONDUITS: Unless otherwise specified, all underground steel conduits in contact with earth shall be encased by the Contractor who installs them, in a covering of not less than two (2) inches of an approved concrete mixture. Concrete mix shall be one (1) part cement to four and one-half (4 ½) parts of fine and coarse aggregate.
6. EXCAVATION RESTORATION PERMITS: When installing underground conduits, duct banks or manholes the Contractor shall perform the work of cutting pavement, excavation shoring, keeping trenches or holes pumped dry, backfilling, restoration of surfaces to original condition and removal of excess earth and rubbish from premises. During the work, the Contractor shall provide adequate crossovers, protective barriers, lamps, flags, etc., to safeguard traffic and the public. When the work is in a public highway or street, the Contractor shall secure and pay for all necessary permits and inspection fees and pay the cost of repaving.
7. EXPOSED CONDUIT SUPPORTS: Exposed conduit shall be supported by Galvanized hangers with necessary inserts, beam clamps of approved design or attached to walls or ceilings by expansion bolts. Exposed conduits shall be supported or fastened at intervals not more than five (5) feet.
8. Exposed conduit shall be installed parallel or at right angles to ceiling, walls and partitions. Where direction changes of exposed conduit cannot be made with neat bends, such as required around beams or columns, conduit type fitting shall be used.



9. The conduit shall be installed with an approved expansion joint:
 - a. Wherever the conduit crosses a building expansion joint the Contractor will be held responsible for determining where the building expansion joints are located.
 - b. Every 200 feet, when in straight runs of 200 feet or longer.
10. Conduit may only enter and leave a floating slab in the vertical direction, and then only in an approved manner. Horizontal entries into floating slabs are not permitted.
11. Conduit installed in pipe shafts shall be properly supported to carry the total weight of the raceway system complete with cable. In addition at least one (1) horizontal brace per 10 ft. section shall be provided to assure stability of the raceway system.
12. BUSHINGS AND LOCKNUTS: Approved bushings and locknuts shall be used wherever conduits enter outlet boxes, switch boxes, pull boxes, panel board cabinets, etc.
13. CONDUIT BENDS: shall be made without kinking conduit or appreciably reducing the internal diameter. All bends in conduit of two (2) inch in diameter or larger shall be made with an hydraulic or power pipe bender. The radius of the inner edge of any bend shall not be less than six (6) times the internal diameter of the conduit where rubber covered conductors are to be installed, and not less than 10 times the internal diameter of the conduit where lead covered conductors are to be used. Long gradual sweeps will be required, rather than sharp bends, when changes of direction are necessary.
14. EMPTY CONDUITS
 - a. TESTS: All conduits and ducts required to be installed and left empty shall be tested for clear bore and correct installation by the Contractor using a ball mandrel and a brush and snake before the installation will be accepted. The ball shall be turned to approximately 85% of the internal diameter of the raceway to be tested. Two (2) short wire brushes shall be included in the mandrel assembly. Snaking of conduits, ducts, etc., shall be performed by the Contractor in the presence of the Resident Engineer. Any conduits or ducts which reject the mandrel shall be cleared at once with the Contractor bearing all costs, such as chopping concrete, to replace the defective conduit and restore the surface to its original condition.
 - b. TAGS: Numbers or letters shall be assigned to the various conduit runs, and as they test clear they shall be identified by a fiber tag not less than 1-1/4 inch width, attached by means of a nylon cord. All conduit terminations in panel, splice or pull boxes as well as those out of the floor or ceiling shall be tagged.
 - c. TEST RECORDS: As the conduit runs clear, a record shall be kept under the heading of "Empty Conduit Tested, Left Clear, Tagged and Capped" showing conduit designation, diameter, location, date tested and by whom. When complete, this record shall be signed by the Resident Engineer and submitted in triplicate for approval. This record shall be entered on the Contract Record Drawings under Section 01 78 39, CONTRACT RECORD DOCUMENTS.
 - d. CAPPING: All empty conduit and duct openings, after test, shall be capped or plugged by the Contractor as directed.
 - e. DRAG LINES: A drag line shall be left in all empty conduit.

B. BOXES:

1. The Contractor shall furnish and erect all pull boxes indicated on the plans or where required. Sides, top and bottom of pull boxes shall be Galvanized coated and shall be built of No. 12 USSG steel reinforced at corners by substantial angle irons and riveted or welded to plates. Bottom or side



- of pull boxes shall be removable and held in place by corrosion resistant machine screws. Pull boxes in damp locations shall have threaded hubs and gaskets and be NEMA 4X. All pull boxes shall be suspended from ceiling or walls in the most substantial manner.
2. In centering outlets, the Contractor is cautioned to allow for overhead pipes, ducts and other obstructions, and for variations in arrangement and thickness of fireproofing, soundproofing and plastering. Precaution should be exercised regarding the location of window and door trims, paneling, etc. Mistakes resulting from failure to exercise precaution must be corrected by the Contractor at no additional cost to the City. Outlets in hung ceilings shall be supported from the black iron or structure.
 3. The exact location of all outlets in finished rooms shall be as directed. When the interior finish has been applied, the Contractor shall make any necessary adjustment of its work to properly center the outlets. All outlet boxes for local switches near doors shall be located at the strike side of doors as finally hung, whether so indicated on the drawings or not.
 4. Exposed wall outlet boxes shall be erected neatly and tight against the walls and securely anchored to same.
 5. All wall outlets of each type shall be set accurately at the same level on each floor, except where otherwise specified or directed. Where special conditions occur, outlets shall be located as directed.
 6. MOUNTING HEIGHTS: The following heights are standard heights and are subject to correction due to coordination with Contract Drawings. All such changes must be approved by the Resident Engineer. Heights given are from finished floor to center line of outlet or device on wall or partition, unless otherwise indicated.
 - a. General Convenience Outlets
(mount vertical) 1'-6"
 - b. Clock Outlets 8'-6" or 1'-6" below ceiling
 - c. Wall Lighting Switches 4'-0"
 - d. Motor Controllers 5'-0"
 - e. Motor Push-button 4'-2"
 - f. Telephone Outlets As Directed
 - g. Fire Alarm Bells 8'-6" or 1'-6" below ceiling
 - h. Fire Alarm Stations 4'-0"
 - i. Intercom Outlet 1'-6"
 - j. Cooking and Refrigerator Unit As Directed
 7. Outlet boxes shall be of approved design and construction; of form and dimensions suited and adapted to its specific location; the kind of fixture to be used and the number and arrangements of conduits, etc., connecting therewith. All ferrous outlet boxes shall meet the requirements for zinc coating as specified under Electrical Conduit Systems.
 8. There shall be knockouts opened only for the insertion of conduit. Any outlet boxes with more openings than are necessary for conduit insertion shall be sealed by the Contractor without additional charge.
 9. All outlet boxes and junction boxes for exposed work shall be galvanized cast iron or cast aluminum with threaded openings. Outlet boxes for exposed inside work in damp locations shall be galvanized cast iron or cast aluminum with threaded hubs and neoprene gaskets.
 10. Junction boxes shall not be less than 4 11/16" square and shall be equipped with zinc coated plates. Where plates are exposed they shall be finished to match the room decor.



11. **FIXTURE SUPPORTS:** Outlet boxes supporting lighting fixtures shall be equipped with fixture studs held by approved galvanized stove bolts or integral with the box. Cast iron or malleable boxes shall have four (4) tapped holes for mounting required cover or fixtures.
12. Outlet boxes exposed to the weather or indicated W.P. shall be cast iron or cast aluminum and the covers made watertight with neoprene gaskets. The boxes shall have external lugs for mounting. Drilling of the body of the fitting for mounting will not be permitted. The cover screws shall be appropriate in size, non-corrodible and not less than four (4) in number for each box opening.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 ELECTRICAL WIRING DEVICES:

- A. **WALL SWITCHES** shall be of the best specification grade, quiet type, and shall have a rating of 20 Amperes at 277 volts, as manufactured by Bryant, Hubbell or approved equal. The mechanism shall be equipped with arc snuffers. They shall be of the tumbler type, single pole. Switches of the 3-way type shall have a similar rating.
- B. **RECEPTACLES:**
 1. **CONVENIENCE OUTLETS:** shall be of the best specification grade, duplex, two-pole, 3-wire, 20 Amperes at 125 volts. It shall have a grounding pole that shall be grounded to the conduit system. Receptacles shall be capable of both back and side wiring and shall have only one (1) grounding screw. Receptacles shall be Hubbell Cat. #5262 or approved equal.
 2. **HEAVY DUTY RECEPTACLE OUTLETS:** shall have the Ampere rating and the number of poles specified on the Contract Drawings and shall be Hubbell, Russell-Stoll, Bryant, AH & H or approved equal. Each outlet shall have a grounding pole, which shall be grounded to the conduit system.
 3. **FLOOR RECEPTACLES:** shall be Russell & Stoll #3040 or approved equal, to fit into floor box previously specified.
 4. **NAMEPLATES:** are required for all receptacles other than 120V.
- C. **CLOCK HANGERS:** Clock outlets for surface type clocks shall be equipped with a supporting hook and recessed faceplate to conceal the electrical cord.
- D. **WATERTIGHT DEVICES:** For installations exposed to weather or in damp locations, the devices shall be in a gasketed, cast iron enclosure.
- E. **PLATES:**
 1. Every convenience outlet and switch outlet shall be covered by means of a stainless steel No. 302 - 0.4" antimagnetic plate with an approved finish, unless provided otherwise in the detailed Specifications.
 2. Where two (2) or three (3) switches are grouped together, a single faceplate shall be used. Where more than three (3) switches are located at one (1) point, the faceplates may be made up in multiple units.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 ELECTRICAL CONDUCTORS AND TERMINATIONS:

- A. **CONDUCTORS FOR LIGHT AND POWER** - All wire and cable shall be of annealed copper of 98% conductivity. Aluminum wire or cable will not be permitted. The insulation shall be flame retardant, moisture and heat resistant, thermoplastic, type THW or THWN rated for 600 volts at 75 degrees C. for

both wet and dry locations. Wires No. 8 or larger shall be stranded. Wires and cables shall also be subject to the requirements of the NYCEC. Cables for incoming service or wire in conduits contiguous with the earth or in concrete or other damp or wet locations shall be synthetic rubber insulated with neoprene jacket, heat and moisture resistant and shall be equal to UL Type USE and rated for 600 volts at 75 degrees C. for both wet and dry locations.

- B. **FIXTURE WIRE:** Lighting fixtures shall be wired with No. 14 gauge wire designated as AWM and rated at 105 degrees C.
- C. **OTHER TYPES:** Cables and wires for interior communication systems are described in applicable detailed Specifications.
- D. **MINIMUM SIZE:** Conductors smaller than No. 12 AWG shall not be used for light or power.
- E. **COLOR CODE:** Wires shall have a phase color code, and multiple conductor cables shall be color coded.
- F. **CABLE DATA:** The Contractor shall submit for approval the following information for each size and type of cable to be furnished.
 - 1. Manufacture of Cable - Location of Plant.
 - 2. Minimum insulation resistance at standard test temperature.
 - 3. Days required for delivery to site of work after order to proceed with manufacture.
- G. **ORIGINAL REELS:** Cable and wire shall be delivered to the site of the work on original sealed factory reels.
- H. **WIRE INSTALLATION:**
 - 1. **INSTALL WIRES AFTER PLASTERING** - Feeder and branch circuits wiring shall not be installed in conduit before the rough plastering work is completed. No conductors shall be pulled into floor conduits before floor is poured.
 - 2. **CONDUIT SECURED IN PLACE** - No conductor shall be pulled into any conduit run before all joints are made up tightly and the entire run rigidly secured in place.
 - 3. **WIRE ENDS** - All wires shall be left with sufficiently long ends for proper connection and stowing.
 - 4. **PULLING COMPOUNDS** - When required to ease the pulling-in of wires into conduit, only approved compounds as recommended by cable manufacturers shall be used.
 - 5. **PRESSURE CONNECTORS** - for wires shall be of the cast copper or forged copper pressure plate type. Connectors shall be O.Z., Burndy, National Electric Products or approved equal.
 - 6. Splices and feeder taps in the gutters of panel boxes shall be made by means of pressure plate type connectors encased in composition covers as manufactured by O.Z., Burndy, National Electric Products or approved equal.
 - 7. Splices in branch wiring for sound systems and fire systems, shall be first made mechanically secure, then soldered and taped.
 - 8. In lieu of soldered splices (except for sound and Fire Systems, which must have soldered splices) the following alternates are acceptable for operating temperatures up to 105 degrees C., for fluorescent fixtures and for the splicing of branch circuit wiring up to No. 8 AWG wire:
 - a. Mechanical splices made with mechanical connectors as manufactured by the Minnesota Manufacturing Company "Scotchlock" or approved equal. Mechanical connectors requiring a special tool (pressure connectors, insulators and locking rings) by Buchanan or approved equal. The tool used for connector application shall be as approved by the connector manufacturer.



- b. For wire and cable No. 6 AWG and larger for branch circuit wiring the seamless tubular connector will only be accepted. Application of this connector shall be with a tool recommended by the connector manufacturer.
9. TAGS: All feeders and risers shall be tagged at both ends, and in all pull and junction boxes and gutter spaces through which they pass. Such tags shall be of fiber and have the feeder designation and size stamped thereon.
10. BRANCH CIRCUIT WIRING:
 - a. The Contractor installing branch circuit wiring shall test the work for correct connections and leave all loop splices in the fixture outlet boxes properly spliced and taped. The Contractor shall provide wire ends long enough for convenient connection to device.
 - b. NEUTRALS: No common neutrals shall be used except for lighting branch circuits. Each neutral wire shall be terminated separately on a neutral busbar in the panelboard. No common neutrals will be permitted for convenience receptacle branch circuits.

I. TERMINATIONS

1. LUGS: All lugs for all devices and all cable terminations shall be copper. AL/CU rated lugs will not be permitted. The only exception to this requirement is when the particular device is not manufactured with copper lugs by any manufacturer. Lugs for No. 6 AWG cable and larger shall be cast copper or forged copper pressure plate type. Lugs for 1/0 and larger shall be fastened with two (2) bolts.
2. All lugs shall be of the proper size to accept the cable connected to them. Any subcontractor furnishing a device containing lugs is to coordinate with the Contractor to insure that the device terminations are adequate for the wire or cable (whose size may be larger than expected due to voltage drop considerations) connected to the device.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 CIRCUIT PROTECTIVE DEVICES:

This Section sets forth the circuit protective devices such as circuit breakers and safety switches, used in connection with Motor Control Equipment, Distribution Centers, Panel boards and Service Entrance.

A. CIRCUIT BREAKERS:

1. CIRCUIT BREAKERS: shall be operable in any position and shall be of the quick-make, quick-break type on manual operation. The handle shall be trip free, preventing contacts from being held in closed position against abnormal overloads or short circuits. Positive visual indication of automatic tripped position of breaker shall be provided, in addition to the "On" and "Off" indication. All circuit breakers shall be of the bolted type.
2. TRIP RATING: Circuit breakers shall be provided with the required number of trip elements, calibrated at 40 degrees C., ambient temperature, in accordance with wire sizes or motor currents as shown on Contract Drawings or indicated in the Specifications.
3. POLE BARRIER: Multipole pole breakers shall be designed to break all poles simultaneously. They shall be provided with barriers between poles and arc suppressing devices.
4. ELEMENTS: Multipole circuit breakers shall have frames of not less than a 100 Ampere rating. Multipole circuit breakers for 480 volts AC operation shall have an NEMA interrupting rating of 18,000 Amperes, unless a higher rating is specified in the Specific Requirements or indicated on the Contract Drawings.



5. For circuit breakers with frame size up to and including 225 Amperes, the breakers may be provided with non-interchangeable trip elements. For frame ratings above 225 Amperes, the breakers shall be provided with interchangeable trip elements, which can be replaced readily.
6. Single pole circuit breakers for branch circuits shall have a frame size of no less than 100 Amperes, and shall be rated at 125 volt A.C. with a NEMA interrupting rating of 10,000 Amperes, unless a higher rating is specified in the Specifications or indicated on the Contract Drawings.
7. INVERSE TIME ACTION: The circuit breakers shall be dual element type, one (1) element with time limit characteristics, so that tripping will be prevented on momentary overloads, but will occur before dangerous values are reached and the other with instantaneous trip action. Inverse time delay action shall be effective between a minimum tripping point of 125% of rating of breaker and an instantaneous tripping point between 600% and 700% of rated current.
8. CONSTANCY OF CALIBRATION: The tripping elements shall insure constant calibration and be capable of withstanding excessive short circuit conditions without injury.
9. CONTACTS: shall be non-welding under operating conditions and of the silver to silver type.
10. TEMPERATURE RISE: Current carrying parts, except thermal elements, shall not rise in temperature in excess of 30 degrees C. while carrying rated current at rated frequency.
11. NUMBERING: Each circuit breaker shall be distinctly numbered when installed in a group with other breakers. The calibration of trip element shall be indicated on each breaker.

B. SAFETY SWITCHES:

NEMA TYPE HD: When safety switches are permitted to be used for service entrance, motor disconnecting means or to control other types of electrical equipment, they shall be of the type HD of a rating not less than 30 Amperes. Enclosures shall be provided with means for locking. For ratings above 60 Amperes terminals shall have double studs.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.6

3.6 DISTRIBUTION CENTERS:

This Section sets forth the construction and installation procedure for Switchboards, Panel boards and Cabinets.

- A. PANELBOARDS-GENERAL TYPE: The panel boards shall be of the automatic circuit breaker type with individual breakers for each circuit, removable without disturbing the other units. Circuit breakers shall be in accordance with the requirements outlined under "Circuit Protective Devices."
- B. NUMBER AND RATING OF CIRCUIT BREAKERS: The Contract Drawings show a layout of each panel, giving the number, frame, size and trip setting of circuit breakers and number of branch circuits and spare breakers. Each branch circuit shall be distinctly numbered.
- C. BUS-BAR CONSTRUCTION AND SUPPORT: Panel Boards shall be of the dead front type and shall have bus bars and branch circuits designed to suit the system and voltage. Current carrying parts, exclusive of circuit breakers shall be copper and based on a maximum density of 1,000 Amperes per square inch. Bus bars for the main switchboard shall be designed for the frame rating of the Service Breaker. Bus bars shall run up the center of the panel, unless otherwise indicated, and shall have connected thereto the various branch circuits. Unless otherwise specified, bus bars for each panel board shall be equipped with main lugs only and capacity as required on Contract Drawings. Where main protection is required, automatic circuit breakers shall be used. A neutral bus of at least the same capacity as a live bus bar shall be provided for the connection of all neutral conductors. Each terminal shall be identified. All current carrying parts, exclusive of circuit breakers, shall be of copper with a minimum number of joints. The bus bar structure shall be a self-supporting unit, firmly fastened to a ½



- inch plastic board, extending the full length and width of assembly which shall serve to insulate the bus structure from the back of panel box. Other methods affording equally effective bus structure support and insulation will be given consideration. An insulating barrier shall separate neutral bus from other parts of panel.
- D. **CIRCUIT BREAKER ASSEMBLY:** The entire circuit breaker and bus bar assembly shall be mounted on an adjustable metal base or pan and secured to the back of panel box. The panel shall have edges flanged for rigidity.
- E. **PANEL MOUNTING:** The panel shall be centered in the panel box to line up with door openings and set level and plumb so that no live parts are exposed with the door open.
- F. **PANEL CABINET:**
1. **PANEL CABINET INSTALLATION:** When installed surface mounted in panel closets they shall be mounted on Kindorf channel.
 2. Where cabinets cannot be set entirely flush due to shallow walls or partitions or where cabinet is extra deep, the protruding sides of cabinet shall be trimmed with a metal or hardwood return molding of approved design and fastened to cabinet so as to conceal the intersection between the wall and cabinet.
- G. **NAMEPLATES:** Nameplates where required, shall be made of engraved Lamicoid sheet, or approved equal. Letters and numbers shall be engraved white on a black background (except for Firehouse projects which shall have white letters on a red background). The Contractor shall submit an engraved sample for approval as to design and style of lettering before proceeding with the manufacture of the nameplate. Nameplates shall be of suitable size and shall also be provided at the top of the switchboard or section thereof and on the trim at the top of all lighting and power panels. Similar nameplates shall also be provided for each distribution circuit breaker giving the breaker number, the number of the feeder, and the name of the equipment fed.
- H. **SHOP DRAWINGS:** showing all details of boxes, panels, etc., shall be submitted for approval.
- I. **DIRECTORIES:** A directory shall be fastened with brass screws and consist of a noncorrosive metal frame with dimensions not less than five (5) inches x eight (8) inches and a transparent window of Plasticile, Plexiglass, Lucite, Polycarbonate or approved equal that is not less than 1/16 inch thick over cardboard or heavy paper. The directory shall be typewritten and show the number of each circuit, the name of circuit and lighting or equipment supplied. The size of riser feeder shall be as indicated on directory. The dimensions of directory shall be submitted for approval for each size of panel.
- J. **CONSTRUCTION**
1. **FINISH:** Panel boxes, doors and trim for installation in dry locations, shall be zinc coated after fabrication by the hot-dip galvanizing or electroplate process on inside and outside surfaces. In damp locations, panel boards shall be enclosed and gasketed NEMA 3R type. Panel boards located outdoors or exposed to the weather shall be NEMA 3X type.
 2. **PAINTING:** Panel boxes, doors and trim shall receive a coat of approved priming paint and a second coat of approved paint in the field after installation. Paint shall be applied to the inside and outside of boxes and on both sides of trim. Panel trims and doors shall receive a third or finishing coat on the outside after installation. Approval as to texture and color must be obtained before the final coat is applied.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.7

3.7 MOTORS:

This Section sets forth the general design, construction and performance requirements, which shall apply to all motors furnished in the Contract.

- A. **MOTOR DESIGN:** All motors shall be designed to comply with the New York State Energy Conservation Construction Code and the New York City Energy Conservation Code. In the event of any conflict or inconsistency between such codes, the New York City Energy Conservation Code shall prevail. Motors shall have standard NEMA frames and shall have nameplate ratings adequate to meet the specified conditions of operation. Motor performance under variable conditions of voltage and frequency shall be within the limits set in NEMA standards, unless modified in the Specifications. Motors shall be expressly designed for the hazard duty load, voltage and frequency as specified in the Contract. All motor windings shall be copper. All motors intended to operate on a 208 volt system shall be designed and rated for 200 volts.
- B. **STANDARDS OF COMPARISON:** In the absence of specific motor specifications, in general, the best standard products of the leading motor manufacturers shall be considered as a standard for comparison. The requirements of the NEMA standards for motors and generators shall be deemed to contain the minimum requirements of performance and design.
- C. **OBJECTIONABLE NOISES:** Objectionable noises will not be tolerated and exceptionally quiet motors may be required for certain specified locations. Noise control tests as per the New York City Construction Codes may be performed as directed by the Commissioner. Such motors shall bear a nameplate lettered "Quiet Motor." Springs and slip rings shall be of approved non-ferrous material.
- D. **BEARINGS:**
1. Bearings, unless specified otherwise, shall be of the ball or roller type. Motors one (1) horsepower and larger that are equipped with ball roller bearings shall also have lubrication of the pressure-relief greasing type. The Contractor furnishing four (4) or more such motors shall also furnish, as part of the Contract, a pressure grease gun of rugged design, of approximately 10 ounce capacity, complete with necessary adapters. The Contractor shall also provide 10 pounds of approved gun grease.
 2. For any particular unit where sleeve bearings are deemed desirable, permission for their use may be granted by the Commissioner. Motors one (1) horsepower and larger that are equipped with sleeve type bearings shall in addition to having protected accessible fittings for oiling be provided with visible means for determining normal oil level. Lubrication shall be positive, automatic and continuous.
- E. **MOTOR TERMINALS AND BOXES:** Each motor shall be furnished with flexible leads of sufficient length to extend for a distance of not less than three (3) inches beyond the face of the conduit terminal box. This box shall be furnished of ample size to make and house motor connections. These requirements shall be met irrespective of any other standards or practices. Size of cable terminals and conduit terminal box holes shall be subject to approval. For motors five (5) horsepower or larger, each terminal shall come with two (2) cast or forged copper pressure type connectors with bolts, nuts and washers. For motors of smaller ratings, connectors of other acceptable types may be furnished. For installations exposed to the weather or moist locations, terminal boxes shall be of cast iron with threaded hubs and gasketed covers. Cover screws shall be of non-corrosive material.
- F. **MOTOR TEMPERATURE RISES:** The motor nameplate temperature rises for the various types of motor enclosures shall be as listed below:
1. Open Frame 40 degrees C.
 2. Totally enclosed and enclosed fan cooled 55 degrees C.



3. Explosion proof and submersible 55 degrees C.
4. Partially enclosed and drip proof 40 degrees C.

The temperature of the various parts of a motor shall meet the requirements of NEMA standards for the size and type of the motors. Tests for heating shall be made by loading the motor to its rated horsepower and keeping it so loaded for the rated time interval or until the temperature becomes constant.

- G. SPECIAL CODE INSTALLATIONS: Electrical installations covered by special publications of NBFU and by special City rulings and regulations shall comply in design and safety features with such applicable codes, regulations and rulings, and shall be furnished and installed complete with all accessories and safety devices as therein specified.
- H. MOTORS ON LIGHTING PANELS: The largest A.C. motor permitted on branch circuits of lighting panels shall not exceed 1/4 horsepower.
- I. MOTORS RATED: 1/2 horsepower and larger shall be polyphase.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8

3.8 MOTOR CONTROL EQUIPMENT:

This Section sets forth the requirements for motor controllers and associated devices. Such requirements are applicable to all motor control equipment furnished or installed.

- A. MANUFACTURER: All control equipment furnished under the Contract shall be the product of a single manufacturer. Exceptions to this rule may be granted in the case of controllers for fractional horsepower motors driving special equipment, the various units of which have been engineered to obtain specific performance.
- B. CONTROL ITEMS REQUIRED: The Contractor furnishing motors shall also furnish therewith complete disconnecting, starting and control equipment as required by the detailed Specifications, the various code authorities and for the successful operation of the driven equipment. These items include circuit breaker, magnetic starter with overload protection and low voltage release or protection, push button stations, pilot lights and alarms, float, pressure, temperature and limit switches, load transfer switches, devices for manual operation and speed controllers, etc. The Contractor shall furnish as many of these items as are required for the successful operation of the driven unit.
 1. Where a motor is to be located out of sight of the controller, the Contractor shall furnish an approved disconnecting means to be mounted near motor.
- C. TYPES OF STARTERS:
 1. SQUIRREL CAGE: A.C. motors of the squirrel cage type, rated from one (1) to 30 horsepower, shall have magnetic across the line starters; motors rated above 30 horsepower shall be furnished with reduced voltage (autotransformer type) starter or part winding start with time delay to reduce inrush current. Size of starters shall be based on 200V operation.
 2. SLIP RING: A.C. Motors of the slip-ring type shall be furnished with primary across the line starters interlocked with secondary starting and regulating equipment. The interlocking feature shall prevent starting of the motor when the secondary controller is off the initial starting point.
 3. MAGNETIC: For fractional horsepower motors, magnetic type starters are not required unless the particular method of controlling the driven equipment makes them necessary. Where individual single phase fractional horsepower motors or the sum of fractional horsepower motors controlled by an automatic device are 1/2 horsepower or more, magnetic starters and circuit breakers shall be used. Single phase A.C. motors smaller than 1/2 horsepower or three-phase A.C. motors smaller than one (1) horsepower where manual control is specified may be furnished with starters of toggle

switch or push button type with inbuilt thermal protection. No additional disconnecting means is required to be furnished with this type of starter. This type of starter may also be used in series with automatic control devices such as thermostats, float and pressure switches, provided the individual motor or the sum of fractional horsepower motors is less than ½ horsepower. Means for manual operation shall be provided.

- D. DISCONNECTING BREAKER: All motor starters, unless otherwise specified, shall be provided with a disconnecting means in the form of a circuit breaker of the type specified under Article 3.5 CIRCUIT PROTECTIVE DEVICES. This disconnecting means shall be contained in the same housing with the starter and shall be operable from outside. Means shall be provided for locking the handle of the circuit breaker in the "OFF" position if it is desired to take the equipment out of service and prevent unauthorized starting.
- E. CONTROL CABINET: DRY LOCATIONS - All starters shall be furnished with general purpose, NEMA Type 1, sheet metal enclosures with hinged covers and baked enamel finish.
- F. CONTROL CABINET – WATERTIGHT: In wet locations, cast iron watertight enclosures with threaded hubs, galvanized and gasketed hinged covers shall be provided.
- G.
1. PANELS: Motor control devices and appliances shall be mounted on approved insulating slabs with all wiring and connections made on the back of the slabs.
 2. WIRING AND TERMINALS: Wiring connections for currents of 100 Amperes or less may be made with copper wire or cable with special flameproof insulating coverings. Such wires shall be installed in a neat workmanlike manner, flat against the slab, and held in place by clips. Connections shall be made with pressure connectors for No. 8 AWG and larger wires, and with grommets for small stranded wires. Except for incoming and outgoing main leads, all connections shall terminate on approved connector blocks, which may be installed on the face of the slab. For small, across the line starters, the above requirements may be modified if satisfactory connections are provided.
 3. COPPER BUS: For currents exceeding 100 Amperes, copper bus shall be used in place of wires. The bus shall be constructed of copper rods, tubing or flat strap, bent and shaped properly and securely attached to the slab in a neat and workmanlike manner. The cross section of copper shall provide sufficient areas to keep current density at not more than 1,000 Amperes per square inch.
- H. COOPERATION: The Contractor's subcontractor(s) who furnish electrically operated equipment shall give to the Contractor and the Contractor's electrical subcontractor full information relative to sizes and locations of apparatus furnished by them which require electrical connections.
- I. SPARE PARTS:
1. FURNISH: The Contractor shall furnish the following spare parts pertaining to equipment furnished by each subcontractor.

One (1) set of contact fingers and springs and thermal elements for each three (3) (or fraction) of each size of magnetic contactor starter.

One (1) holding coil for each three (3) (or fraction) of each size of magnetic contactor starter.
 2. WRAPPER MARKING: All parts shall be delivered to the Resident Engineer neatly wrapped and boxed and plainly tagged and marked for identification and reordering.

END OF SECTION 01 35 06



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

SECTION 01 35 26
SAFETY REQUIREMENTS PROCEDURES

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Safety and Health Requirements, including:
 - 1. Definitions
 - 2. Required Safety Meeting
 - 3. Compliance with Regulations
 - 4. Submittals
 - 5. Personnel Protective Equipment
 - 6. Hazardous Materials
 - 7. Emergency Suspension of Work
 - 8. Protection of Personnel
 - 9. Environmental Protection

1.3 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.4 REQUIRED SAFETY MEETINGS:

- A. Prior to commencing construction, the Resident Engineer will schedule and hold a preconstruction kick-off meeting either at DDC's main office or at the Project site with representatives of the Contractor, including the principal on-site project representative and one or more safety representatives, Commissioner's designated representatives and other concerned parties for the purpose of reviewing the Contract Safety requirements. The Contractor's safety requirements shall be reviewed, and implementation of safety provisions pertinent to the Work shall be discussed.
- B. The Contractor is responsible for conducting weekly documented jobsite safety meetings, given to all jobsite personnel including all subcontractors on the project, with the purpose of discussing safety topics and job specific requirements at the DDC worksite.



1.5 COMPLIANCE WITH REGULATIONS:

- A. The Work, including contact with or handling of hazardous materials, disturbance or dismantling of structures containing hazardous materials, and disposal of hazardous materials, shall comply with the applicable requirement for CFR Parts 1910 and 1926, and 40 CFR, Parts 61, 261, 761 and 763.
- B. Work involving disturbance or dismantling of asbestos or asbestos containing materials, demolition of structures containing asbestos and removal of asbestos, shall comply with 40 CFR Part 61, Subparts A and M, and 40 CFR Part 763, as applicable.
- C. Work shall additionally comply with all applicable federal, state and local safety and health regulations.
- D. In case of a conflict between applicable regulations, the more stringent requirements shall apply.
- E. All workers working on the DDC project site are required by NYC Local Law 41 to complete the OSHA 10 –hour training course.

1.6 SUBMITTALS:

- A. The Contractor shall submit, to the Resident Engineer, copies of the Safety Program, Site Safety Plan and other required documentation in accordance with the *“New York City Department of Design and Construction Safety Requirements.”*
- B. Permits: If hazardous materials are disposed of off-site submit copies of shipping manifests and permits from applicable federal, state or local authorities and disposal facilities, and submit certificates that the material has been disposed of in accordance with regulations to the Resident Engineer.
- C. Accident Reporting: Submit a copy of each accident report to the Resident Engineer in accordance with the *“New York City Department of Design and Construction Safety Requirements.”*
- D. All Asbestos and Lead project regulatory notifications are to be submitted to DDC’s Bureau of Environmental and Geotechnical Services (BEGS) through the Resident Engineer.
- E. Request for Subcontractor Approval: Any subcontractor performing environmental work shall submit required documentation for approval to perform such work as required by DDC’s BEGS.

PART II – PRODUCTS

2.1 PERSONNEL PROTECTIVE EQUIPMENT:

Special facilities, devices, equipment and similar items used by the Contractor in execution of the Work shall comply with 29 CFR Part 1910, subpart I, Part 1926, subpart E and other applicable regulations.

2.2 HAZARDOUS MATERIALS:

- A. The Contractor shall bring to the attention of the Commissioner, any material encountered during execution of the Work that the Contractor suspects to be hazardous.
- B. The Commissioner shall determine whether the Contractor shall perform tests to determine if the material is hazardous. A change to the Contract price may be provided, subject to the applicable provisions of the Contract.
- C. If the material is found to be hazardous, the Commissioner may direct the Contractor to remediate the hazard and a change to the Contract price may be provided, subject to the applicable provisions of the Contract.

PART III – EXECUTION

3.1 EMERGENCY SUSPENSION OF WORK:

- A. When the Contractor is notified by the Commissioner of noncompliance with the safety provisions of the Contract, the Contractor shall immediately, unless otherwise instructed, correct the unsafe condition, at no additional cost to the City.
- B. If the Contractor fails to comply promptly, all or part of the Work may be stopped by notice from the Commissioner.
- C. When, in the opinion of the Commissioner, the Contractor has taken satisfactory corrective action, the Commissioner shall provide written notice to the Contractor that work may resume.
- D. The Contractor shall not be allowed any extension of time or compensation for damages in connection with a work stoppage for an unsafe condition.

3.2 PROTECTION OF PERSONNEL:

- A. The Contractor shall take all necessary precautions to prevent injury to the public, occupants, or damage to property of others. The public and occupants includes all persons not employed by the Contractor or a subcontractor.
- B. Whenever practical, the work area shall be fenced, barricaded or otherwise blocked off from the Public or occupants to prevent unauthorized entry into the work area, in compliance with the requirements of Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS, and including, without limitation, the following:
 - 1. Provide traffic barricades and traffic control signage where construction activities occur in vehicular areas.
 - 2. Corridors, aisles, stairways, doors and exit ways shall not be obstructed or used in a manner to encroach upon routes of ingress or egress utilized by the public or occupants, or to present an unsafe condition to the public or occupants.
 - 3. Store, position and use equipment, tools, materials, scraps and trash in a manner that does not present a hazard to the public or occupant by accidental shifting, ignition or other hazardous activity.
 - 4. Store and transport refuse and debris in a manner to prevent unsafe and unhealthy conditions for the public and occupants. Cover refuse containers, and remove refuse on a frequent regular basis acceptable to the Resident Engineer. Use tarpaulins or other means to prevent loose transported materials from dropping from trucks or other vehicles.

3.3 ENVIRONMENTAL PROTECTION:

- A. Dispose of solid, liquid and gaseous contaminants in accordance with local codes, laws, ordinances and regulations.
- B. Comply with applicable federal, state and local noise control laws, ordinances and regulations, including but not limited to 29 CFR 1910.95, 29 CFR 1926.52 and NYC Administrative Code Chapter 28 of Title 15.

END OF SECTION 01 35 26



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text



**SECTION 01 35 91
HISTORIC TREATMENT PROCEDURES**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 35 91

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements for the treatment of Landmark Structures and Landmark Quality Structures, as identified in the Addendum. Specific requirements are indicated in other sections of the Specifications.
- B. This Section includes, without limitation, the following:
1. Storage and protection of existing historic materials.
 2. Temporary protection of historic materials during construction.
 3. General Protection
 4. Protection during use of heat-generating equipment.
 5. Photographic Documentation
 6. NYC Landmarks Preservation Commission Final Approval signoffs.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- C. Section 01 33 00 SUBMITTAL PROCEDURES
- D. Section 01 77 00 CLOSEOUT PROCEDURES
- E. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Landmark Structure or Site: Any building or site which has been designated as a landmark, or any building or site within a landmark district, as designated by the New York City Landmarks Preservation Commission or the New York State Historic Preservation Office.



- D. Landmark Quality Structure: Any building which has been determined by the City to be of landmark quality and/or historical significance
- E. Preservation: To apply measures necessary to sustain the existing form, integrity, and materials of a historic property. Work may include preliminary measures to protect and stabilize the property.
- F. Rehabilitation: To make possible a compatible use for a property through repair, alterations, and additions while preserving those portions or features that convey its historical, cultural, or architectural values.
- G. Restoration: To accurately depict the form, features, and character of a property as it appeared at a particular period of time by means of the removal of features from other periods in its history and the reconstruction of missing features from the restoration period.
- H. Reconstruction: To reproduce in the exact form and detail a building, structure, or artifact as it appeared at a specific period in time.
- I. Stabilize: To apply measures designed to reestablish a weather-resistant enclosure and the structural reinforcement of an item or portion of the building while maintaining the essential form as it exists at present.
- J. Protect and Maintain: To remove deteriorating corrosion, reapply protective coatings, and install protective measures such as temporary guards; to provide the least degree of intervention.
- K. Repair: To stabilize, consolidate, or conserve; to retain existing materials and features while employing as little new material as possible. Repair includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials. Within restoration, repair also includes limited replacement in kind, rehabilitation, and reconstruction, with compatible substitute materials for deteriorated or missing parts of features when there are surviving prototypes.
- L. Replace: To duplicate and replace entire features with new material in kind. Replacement includes the following conditions:
 - 1. Duplication: Includes replacing elements damaged beyond repair or missing. Original material is indicated as the pattern for creating new duplicated elements.
 - 2. Replacement with New Materials: Includes replacement with new material when original material is not available as patterns for creating new duplicated elements.
 - 3. Replacement with Substitute Materials: Includes replacement with compatible substitute materials. Substitute materials are not allowed, unless otherwise indicated.
- M. Remove: To detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.
- N. Remove and Salvage: To detach items from existing construction and deliver them to the City ready for reuse.
- O. Remove and Reinstall: To detach items from existing construction, repair and clean them for reuse, and reinstall them where indicated.
- P. Existing to Remain or Retain: Existing items of construction that are not to be removed and that are not otherwise indicated to be removed and salvaged, or removed and reinstalled.



- Q. Material in Kind: Material that matches existing materials, as much as possible, in species, cut, color, grain, and finish.

1.5 SUBMITTALS:

- A. Historic Treatment Program: Submit a written plan for each phase or process, including protection of surrounding materials during operations. Describe in detail materials, methods, and equipment to be used for each phase of work.
- B. Alternative Methods and Materials: If alternative methods and materials to those indicated are proposed for any phase of work, submit for Commissioner's approval a written description including evidence of successful use on other comparable projects, and program of testing to demonstrate effectiveness for use on this Project.
- C. Qualification Data: For historic treatment specialists as specified and required by individual sections of the project specifications.
- D. Photographs for Designated Landmark Structures: Submit photographs in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION and as described in this section.
- E. Record Documents: Include modifications to manufacturer's written instructions and procedures, as documented in the historic treatment preconstruction conference and as the Work progresses.

1.6 QUALITY ASSURANCE:

- A. Special Experience Requirements: Special Experience Requirements may apply to the firm that will provide Historic Treatment Services. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- B. Historic Treatment Preconstruction Conference: The Resident Engineer will schedule and hold a preconstruction meeting at the site in accordance with Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION.
1. Review manufacturer's written instructions for precautions and effects of products and procedures on building materials, components, and vegetation.
- a. Record procedures established as a result of the review and distribute to affected parties.

1.7 STORAGE AND PROTECTION OF HISTORIC MATERIALS:

- A. Removed and Salvaged Historic Materials: As specified and required by individual sections of the project specifications.
- B. Removed and Reinstalled Historic Materials: As specified and required by individual sections of the project specifications.
- C. Existing Historic Materials to Remain: Protect construction indicated to remain against damage and soiling during historic treatment. When permitted by the Commissioner, items may be removed to a suitable, protected storage location during historic treatment and reinstalled in their original locations after historic treatment operations are complete.
- D. Storage and Protection: When removed from their existing location, store historic materials, at a location acceptable to the Commissioner, within a weather tight enclosure where they are protected from wetting by rain, snow, or ground water, and temperature variations. Secure stored materials to protect from theft.
1. Identify removed items with an inconspicuous mark indicating their original location.



PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 PROTECTION, GENERAL:

- A. Comply with manufacturer's written instructions for precautions and effects of products and procedures on adjacent building materials, components, and vegetation.
- B. Ensure that supervisory personnel are present when work begins and during its progress.
- C. Temporary Protection of Historic Materials during Construction:
 - 1. Protect existing materials during installation of temporary protections and construction. Do not deface or remove existing materials.
 - 2. Attachments of temporary protection to existing construction shall be approved by the Commissioner prior to installation.
- D. Protect landscape work adjacent to or within work areas as follows:
 - 1. Provide barriers to protect tree trunks.
 - 2. Bind spreading shrubs.
 - 3. Use coverings that allow plants to breathe and remove coverings at the end of each day. Do not cover plant material with a waterproof membrane for more than 8 hours at a time.
 - 4. Set scaffolding and ladder legs away from plants.
- E. Existing Drains: Prior to the start of work or any cleaning operations, test drains and other water removal systems to ensure that drains and systems are functioning properly. Notify Commissioner immediately of drains or systems that are stopped or blocked. Do not begin Work of this Section until the drains are in working order.
 - 1. Provide a method to prevent solids, including stone or mortar residue, from entering the drains or drain lines. Clean out drains and drain lines that become blocked or filled by sand or any other solids because of work performed under this Contract.
 - 2. Protect storm drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.

3.2 PROTECTION DURING USE OF HEAT-GENERATING EQUIPMENT:

- A. No roofing work requiring the use of an open flame shall be permitted on any Landmark Structure or any Landmark Quality Structure, whose roof or wall structure is made of wood or primarily of wood.
- B. Comply with the following procedures while performing work with heat-generating equipment, including welding, cutting, soldering, brazing, paint removal with heat, and other operations where open flames or implements utilizing heat are used:
 - 1. Obtain Commissioner's approval for operations involving use of open-flame or welding equipment. Notification shall be given for each occurrence and location of work with heat-generating equipment.
 - 2. As far as practical, use heat-generating equipment in shop areas or outside the building.
 - 3. Before work with heat-generating equipment commences, furnish personnel to serve as a fire watch (or watches) for location(s) where work is to be performed.



4. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
 5. Remove and keep the area free of combustibles, including, rubbish, paper, waste, etc., within area of operations.
 6. If combustible material cannot be removed, provide fireproof blankets to cover such materials.
 7. Where possible, furnish and use baffles of metal or gypsum board to prevent the spraying of sparks or hot slag into surrounding combustible material.
 8. Prevent the extension of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
 9. Inspect each location of the day's work not sooner than 30 minutes after completion of operations to detect hidden or smoldering fires and to ensure that proper housekeeping is maintained.
- C. Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to automatic sprinkler heads, shield the individual heads temporarily with guards.

3.3 PHOTOGRAPHIC DOCUMENTATION:

Photographs for Designated Landmark Structures: Show existing conditions prior to any historic treatments, including one overall photograph and two close-up photographs of all areas of work affected. Show one overall photograph and two close-up photographs of all areas of work after the successful execution of all historical treatments.

3.4 NEW YORK CITY LANDMARKS PRESERVATION COMMISSION FINAL APPROVALS SIGNOFF:

For all projects involving a Landmark Structure or Site, the Contractor, at the completion of the work, shall submit to the Commissioner, in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS, all documentation concerning the successful execution of all historic treatments. This shall include, but not be limited to, copies of all before and after photographs of historic treatments, one copy of the Contractor's as-built drawings, copies of testing and analysis results, including cleaning, mortar analysis, pointing mortars and all other information pertaining to work performed under the New York City Landmarks Preservation Commission jurisdiction.

END OF SECTION 01 35 91



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

SECTION 01 40 00
QUALITY REQUIREMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes the following:
- a. Definitions
 - b. Conflicting Requirements
 - c. Quality Assurance
 - d. Quality Control
 - e. Approval of Materials
 - f. Special Inspections (Controlled Inspection)
 - g. Inspections by Other City Agencies
 - h. Certificates of Approval
 - i. Acceptance Tests
 - j. Repair and Protection
- B. This Section includes administrative and procedural requirements for quality control to assure compliance with quality requirements specified in the Contract Documents.
- C. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
- D. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
- E. Provisions of this Section do not limit requirements for the Contractor to provide quality-assurance and -control services required by the Commissioner or authorities having jurisdiction.
- F. Specific test and inspection requirements are specified in the individual sections of the Specifications.
- G. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- H. COMMISSIONING: Refer to the Addendum to identify whether this project will be Commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED-NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.



1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONTRACT RECORD DOCUMENTS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioning: A Total Quality Assurance process that includes checking the design and installation of equipment, as well as performing functional testing of the same to confirm that the installed equipment is operating and in conformance with the Contract Documents and the City's requirements.

1.5 CONFLICTING REQUIREMENTS:

- A. General: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, the Contractor shall comply with the most stringent requirement as determined by the Commissioner. The Contractor shall refer any uncertainties and/or conflicting requirements to the Commissioner for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. The Contractor shall refer any uncertainties to the Commissioner for a decision before proceeding.

1.6 QUALITY ASSURANCE:

- A. General: Qualifications paragraphs in this Sub-Section establish the minimum qualification levels required. Individual Specification Sections specify additional requirements.
- B. Installer Qualifications: Special Experience Requirements may apply to the firm that will install, erect or assemble specified work required for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.
- C. Manufacturer Qualifications: Special Experience Requirements may apply to the firm that will manufacture equipment, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum.

- D. Fabricator Qualifications: Special Experience Requirements may apply to the firm that will fabricate material, products or systems specified for the Project. If applicable, such Special Experience Requirements are set forth in the Bid Booklet and the Addendum
- E. Professional Engineer Qualifications: A professional engineer who is licensed to practice in the State of New York and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or products that are similar to those indicated for this Project in material, design, and extent.
- F. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- G. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
 - 1. Build mockups in location and of size indicated or, if not indicated, as directed by the Resident Engineer.
 - 2. Notify Resident Engineer seven (7) days in advance of dates and times when mockups will be constructed.
 - 3. Demonstrate the proposed range of aesthetic effects and workmanship.
 - 4. Obtain Design Consultant's approval of mockups before starting work, fabrication, or construction.
 - 5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 - 6. Demolish and remove mockups when directed, unless otherwise directed or indicated.

1.7 QUALITY CONTROL:

- A. City's Responsibilities: Where quality-control services are indicated as the City's responsibility in the Specifications, the City will engage a qualified testing agency to perform these services.
 - 1. COST OF TESTS BORNE BY THE CITY: Where the City directs tests to be performed to determine compliance with the Specifications regarding materials or equipment, and where such compliance is ascertained as a result thereof, the City will bear the cost of such tests.
 - 2. The City will furnish the Contractor with names, addresses, and telephone numbers of testing entities engaged and a description of the types of testing and inspecting they are engaged to perform.
 - 3. Costs for retesting and re-inspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to the Contractor.
- B. Contractor's Responsibility: Tests and inspections not explicitly assigned to the City are the Contractor's responsibility. Unless otherwise indicated, the Contractor shall provide quality-control services as set forth in the Specifications and those required by Authorities having jurisdiction. The Contractor shall provide quality-control services required by Authorities having jurisdiction, whether specified or not.
 - 1. COST OF TESTS BORNE BY CONTRACTOR – In the case of tests which are specifically called for in the Specifications to be provided by the Contractor or tests which are required by any Authority having jurisdiction, but are not indicated as the responsibility of the City, the cost thereof shall be borne by the Contractor and shall be deemed to be included in the Contract price. The Contractor shall reimburse the City for expenditures incurred in providing tests on materials and equipment submitted by the Contractor as the equivalent of that specifically named in the Specifications and rejected for non-compliance.
 - 2. Where services are indicated as Contractor's responsibility, the Contractor shall engage a qualified testing agency to perform these quality-control services. Any testing agency engaged by the Contractor to perform quality control services is subject to prior approval by the Commissioner.



3. The Contractor shall not employ same entity engaged by the City, unless agreed to in writing by the Commissioner.
 4. The Contractor shall notify testing agencies and the Resident Engineer at least 72 hours in advance of the date and time for the performance of Work that requires testing or inspecting.
 5. Where quality-control services are indicated as Contractor's responsibility, the Contractor shall submit a certified written report, in triplicate to the Commissioner, of each quality-control service.
 6. Testing and inspecting requested by the Contractor and not required by the Contract Documents are Contractor's responsibility.
 7. The Contractor shall submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. **Manufacturer's Field Services:** Where indicated, the Contractor shall engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Results shall be submitted in writing as specified in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. **Retesting/Re-inspecting:** Regardless of whether the original tests or inspections were the Contractor's responsibility, the Contractor shall provide quality-control services, including retesting and re-inspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. **Associated Services:** The Contractor shall cooperate with entities performing required tests, inspections, and similar quality-control services, and shall provide reasonable auxiliary services as requested. The Contractor shall notify the testing agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist testing entity in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing entities.
 6. Design mix proposed for use for material mixes that require control by the testing entity.
 7. Security and protection for samples and for testing and inspecting equipment at the Project site.
- F. **Coordination:** Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
 2. Coordinate and cooperate with the Commissioning Authority/Agent as applicable for start-up, inspection and functional testing in the implementation of the Commissioning Plan.
- G. **Manufacturer's Directions:** Where the Specifications provide that the manufacturer's directions are to be used, such printed directions shall be submitted to the Commissioner.
- H. **Inspection of Material:** In the event that the Specifications require the Contractor to engage the services of an entity to witness and inspect any material especially manufactured or prepared for use in or part of the permanent construction, such entity shall be subject to prior written approval by the Commissioner.
1. **NOTICE** - The Contractor shall give notice in writing to the Commissioner sufficiently in advance of its intention to commence the manufacture or preparation of materials especially manufactured or prepared for use in or as part of the permanent construction. Such notice shall contain a request for inspection, the date of commencement and the expected date of completion of the manufacture or preparation of materials. Upon receipt of such notice, the Commissioner will arrange to have a representative present at such times during the manufacture as may be necessary to inspect the materials, or the Commissioner will notify the Contractor that the inspection will be made at a point



other than the point of manufacture, or the Commissioner will notify the Contractor that inspection will be waived.

- I. No Shipping Before Inspection: The Contractor shall comply with the foregoing before shipping any material.
- J. Certificate of Manufacture: When the Commissioner so requires, the Contractor shall furnish to the Commissioner authoritative evidence in the form of Certificates of Manufacture that the materials to be used in the work have been manufactured and tested in conformity with the Specifications. These certificates shall include copies of the results of physical tests and chemical analyses where necessary, that have been made directly on the product, or on similar products being fabricated by the manufacturer. This may include such approvals as B.S.A., M.E.A., B.E.C. Advisory Board, etc.
- K. Acceptance: When materials or manufactured products shall comprise such quantity that it is not practical to make physical tests or chemical analyses directly on the product furnished, a certificate stating the results of such tests or analyses of similar materials which were concurrently produced may, at the discretion of the Commissioner, be considered as the basis for the acceptance of such material or manufactured product.
- L. Testing Compliance: The testing personnel shall make the necessary inspections and tests, and the reports thereof shall be in such form as will facilitate checking to determine compliance with the Specifications, indicating thereon all analyses and/or test data and interpreted results thereof.
- M. Reports: Six (6) copies of the reports shall be submitted and authoritative certification thereof must be furnished to the Commissioner as a prerequisite for the acceptance of any material or equipment.
- N. Rejections: If, in making any test, it is ascertained by the Commissioner that the material or equipment does not comply with the Specifications, the Contractor will be notified thereof, and will be directed to refrain from delivering said materials or equipment, or to promptly remove it from the site or from the work and replace it with acceptable material at no additional cost to the City.
- O. Furnish Designated Materials: Upon rejection of any material or equipment submitted as the equivalent of that specifically named in the Specifications, the Contractor shall immediately proceed to furnish the designated material or equipment.

1.8 APPROVAL OF MATERIALS:

- A. Local Laws: All materials, appliances and types or methods of construction shall be in accordance with the Specifications and shall in no event be less than that necessary to conform to the requirements of the New York City Construction Codes, Administrative Code and Charter of the City of New York.
- B. Approval of Manufacturer: The names of proposed manufacturers, material suppliers, and dealers who are to furnish materials, fixtures, equipment, appliances or other fittings shall be submitted to the Commissioner for approval, as early as possible, to afford proper review and analysis. No manufacturer will be approved for any materials to be furnished under the Contract unless it shall have a plant of ample capacity and shall have successfully produced similar products. All approvals of materials or equipment that are legally required by the New York City Construction Codes and other governing Authorities must be obtained prior to installation.
- C. All Materials: Fixtures, fittings, supplies and equipment furnished under the Contract shall be new and unused, except as approved by the Commissioner, and of standard first-grade quality and of the best workmanship and design. The City of New York encourages the use of recycled products where practical.
- D. INFORMATION TO SUPPLIERS - In asking for prices on materials under any item of the Contract, the Contractor shall provide the manufacturer or dealer with such complete information from the



Specifications and Contract Drawings as may in any case be necessary, and in every case the Contractor shall inform the manufacturer or dealer of all the General Conditions and requirements herein contained.

1.9 SPECIAL INSPECTIONS:

A. SPECIAL INSPECTIONS:

1. Inspection of selected materials, equipment, installation, fabrication, erection or placement of components and connections made during the progress of the Work to ensure compliance with the Contract Documents and provisions of the New York City Construction Codes, shall be made by a Special Inspector. The City of New York will retain the services of the Special Inspector and bear the costs for the performance of Special Inspections in compliance with NYC Construction Codes requirements or as additionally may be called for in the project specifications, except as noted below for Form TR-3: Technical Report for Concrete Design Mix. The Special Inspector shall be an entity compliant with the requirements of the New York City Construction Codes. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring special inspection.
2. Form TR3: Technical Report Concrete Design Mix: The contractor shall be responsible for, and bear all costs associated with the filing and securing of approvals, if any, for Form TR3: Technical Report Concrete Design Mix, including, but not limited to, engaging the services of a New York City licensed Concrete Testing Lab for the review and approval of concrete design mix, testing, signatures and professional seals, etc., compliant with NYC Department of Buildings requirements, for each concrete design mix.
3. The Contractor shall notify the relevant Special Inspector in writing at least 72 hours before the commencement of any work requiring Special Inspection. The contractor shall be responsible for, and bear related costs to assure that all construction or work shall remain accessible and exposed for inspection purposes until the required inspection is completed.
4. Inspections and tests performed under "Special Inspection" shall not relieve the Contractor of the responsibility to comply with the Contract Documents, and that there is no warranty given to the Contractor by the City of New York in connection with such inspection and tests or certifications made under "Special Inspections".
5. The contractor must coordinate with the Resident Engineer or DDC Project Manager to provide access and schedule the work for inspection by the Special Inspector.

1.10 INSPECTIONS BY OTHER CITY AGENCIES:

- A. Letter of Completion: Just prior to substantial completion of this Project, the Commissioner will file with the Department of Buildings, an application for a Letter of Completion or a Certificate of Occupancy for the structure.
- B. Final Inspections: In connection with the above mentioned application for a Letter of Completion or a Certificate of Occupancy and before certificates of final payments are issued, the Contractor will be required to arrange for all final inspections by the inspection staff of the Department of Buildings, Fire Department or other Governmental Agencies having jurisdiction, and secure all reports, sign offs, certificates, etc., by such inspection staff or other governmental agencies, in order that a Letter of Completion or Certificate of Occupancy can be issued promptly.

1.11 CERTIFICATES OF APPROVAL:

- A. Responsibility: The Contractor shall be responsible for and shall obtain all final approvals for the work installed under the Contract in the form of such certificates that are required by all governmental agencies having jurisdiction over the work of the Contract.
- B. Transmittal: All such certificates shall be forwarded to the Commissioner through the Resident Engineer.



1.12 ACCEPTANCE TESTS:

- A. Government Agencies: All equipment and appliances furnished and installed under the Contract shall conform to the requirements of the Specifications, and shall in no event be less than that necessary to comply with the minimum requirements of the law and all of the governmental agencies having jurisdiction.
- B. Notice of Tests: Whenever the Specifications and/or any governmental agency having jurisdiction requires the acceptance test, the Contractor shall give written notice to all concerned of the time when these tests will be conducted.
- C. Energy: The City will furnish all energy, fuel, water and light required for tests.
- D. Labor and Materials: The Contractor shall furnish labor and all other material and instruments necessary to conduct the acceptance tests at no additional cost to the City.
- E. Certificates: The final acceptance by the Commissioner shall be contingent upon the Contractor delivering to the Commissioner all necessary certificates evidencing compliance in every respect with the requirements of the regulatory agencies having jurisdiction.
- F. Results: If the results of tests and Special Inspections indicate that the material or procedures do not meet requirements as set forth on the Contract Drawings or in the Specifications or are otherwise unsatisfactory, the Contractor shall only proceed as directed by the Resident Engineer. Additional costs resulting from retesting, re-inspecting, replacing of material and/or damage to the work and any delay caused to the schedule shall be borne by the Contractor.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, the Contractor shall repair damaged construction and restore substrates and finishes.
 - 1. Provide materials and comply with installation requirements specified in other Specification Sections. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible.

END OF SECTION 01 40 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text



**SECTION 01 42 00
REFERENCES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 DEFINITIONS:

REFER TO THE ADDENDUM, Article IX, FOR ADDITIONAL DEFINITIONS AND REVISIONS TO THE CONTRACT AND SPECIFICATIONS

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. "APPROVED," ETC. - "Approved," "acceptable," "satisfactory," and words of similar import shall mean and intend approved, acceptable or satisfactory to the Commissioner.
- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- D. "DIRECTED," "REQUIRED," ETC.- Wherever reference is made in the Contract to the work or its performance, the terms "directed," "required," "permitted," "ordered," "designated," "prescribed," "determined," and words of similar import shall, unless expressed otherwise, imply the direction, requirements, permission, order, designation or prescription of the Commissioner.
- E. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings.



1.3 CODES, AGENCIES AND REGULATIONS:

A.D.A.A.G.	Americans with Disabilities Act (ADA) – Architectural Barriers Act (ABA)
B.G. & E.	Bureau of Gas and Electricity of the City of New York
B.S. & A.	New York City Board of Standards and Appeals
DOE	Department of Energy
E.C.C.C.N.Y.S.	Energy Conservation Construction Code of New York State
EPA	Environmental Protection Administration
N.Y.C.C.C.	New York City Construction Codes – includes: New York City Plumbing Code New York City Building Code New York City Mechanical Code New York City Fuel Gas Code
N.Y.S.D.O.L	New York State Department of Labor
N.Y.C.D.E.P	New York City Department of Environmental Protection
N.Y.C.E.C.	New York City Electrical Code
N.Y.C.E.C.C	New York City Energy Conservation Code
N.Y.C.F.C	New York City Fire Code
N.Y.S...D.E.C.	New York State Department of Environmental Conservation
O.S.H.A.	Occupational Safety & Health Administration

1.4 INDUSTRY STANDARDS:

- A. STANDARD REFERENCES – Unless otherwise specifically indicated in the Contract Documents, whenever reference is made to the furnishing of materials or testing thereof that conforms to the standards of any technical society, organization or body, it shall be construed to mean the latest standard, code, specification adopted and published by that technical society, organization or body, as of the date of the bid opening, unless the provisions of the New York City Construction Codes adopt a different or earlier dated version of such standard.
- B. APPLICABILITY OF STANDARDS: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect, to the extent referenced, as if bound or copied directly into the Contract Documents. Such standards are made a part of the Contract Documents by reference.
- C. CONFLICTING REQUIREMENTS: Where compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantity or quality, comply with the most stringent requirements. Immediately refer uncertainties, and requirements that are different but apparently equal, to the Commissioner in writing for a decision before proceeding.
- D. STANDARD SPECIFICATIONS - When no reference is made to a code, standard or specification, the Standard Specifications of the ASTM or the AIEE, as the case may be, shall govern.
- E. REFERENCES - Reference to a technical society, organization or body may be made in the Specifications by abbreviations. Abbreviations and acronyms used in the Specifications and other Contract Documents mean the associated name. The following names are subject to change and are



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

believed, but are not assured, to be accurate and up-to-date as of the Issue Date of the Contract Documents.

AA	Aluminum Association, Inc. (The)
AAADM	American Association of Automatic Door Manufacturers
AABC	Associated Air Balance Council
AAMA	American Architectural Manufacturers Association
AASHTO	American Association of State Highway and Transportation Officials
AATCC	American Association of Textile Chemists and Colorists (The)
ABAA	Air Barrier Association of America
ABMA	American Bearing Manufacturers Association
ACI	ACI International (American Concrete Institute)
ACPA	American Concrete Pipe Association
AEIC	Association of Edison Illuminating Companies, Inc. (The)
AF&PA	American Forest & Paper Association
AGA	American Gas Association
AGC	Associated General Contractors of America (The)
AGMA	American Gear Manufacturer Association
AHA	American Hardboard Association (Now part of CPA)
AHAM	Association of Home Appliance Manufacturers
AI	Asphalt Institute
AIA	American Institute of Architects (The)
AIEE	American Institute of Electrical Engineers
AISC	American Institute of Steel Construction
AISI	American Iron and Steel Institute
AITC	American Institute of Timber Construction
ALCA	Associated Landscape Contractors of America (Now PLANET - Professional Landcare Network)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

ALSc	American Lumber Standard Committee, Incorporated
ALI	Automotive Lift Institute
AMCA	Air Movement and Control Association International, Inc.
ANSI	American National Standards Institute
AOSA	Association of Official Seed Analysts, Inc.
APA	APA - The Engineered Wood Association
APA	Architectural Precast Association
API	American Petroleum Institute
ARI	Air-Conditioning & Refrigeration Institute
ARMA	Asphalt Roofing Manufacturers Association
ASA	American Standards Association
ASAE	American Society of Agricultural Engineers
ASCE/SEI	American Society of Civil Engineers, Structural Engineering Institute
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers
ASME	American Society of Mechanical Engineers
ASSE	American Society of Sanitary Engineering
ASTM	ASTM International (American Society for Testing and Materials International)
AWCI	AWCI International (Association of the Wall and Ceiling Industry International)
AWCMA	American Window Covering Manufacturers Association (Now WCSC)
AWI	Architectural Woodwork Institute
AWPA	American Wood-Preservers' Association
AWSC	American Welding Society
AWWA	American Water Works Association
BHMA	Builders Hardware Manufacturers Association
BIA	Brick Industry Association (The)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

BICSI	BICSI
BIFMA	BIFMA International (Business and Institutional Furniture Manufacturer's Association International)
BISSC	Baking Industry Sanitation Standards Committee
CIBSE	Chartered Institute of Building Services Engineers
CCC	Carpet Cushion Council
CDA	Copper Development Association
CEA	Canadian Electricity Association
CFFA	Chemical Fabrics & Film Association, Inc.
CGA	Compressed Gas Association
CGSB	Canadian General Standards Board
CIMA	Cellulose Insulation Manufacturers Association
CIPRA	Cast Iron Pipe Research Association
CISCA	Ceilings & Interior Systems Construction Association
CISPI	Cast Iron Soil Pipe Institute
CLFMI	Chain Link Fence Manufacturers Institute
CPA	Composite Panel Association
CPPA	Corrugated Polyethylene Pipe Association
CPSC	Consumer Product Safety Commission
CRI	Carpet & Rug Institute (The)
CRSI	Concrete Reinforcing Steel Institute
CSA	Canadian Standards Association
CSI	Cast Stone Institute
CSI	Construction Specifications Institute (The)
CSSB	Cedar Shake & Shingle Bureau
CTI	Cooling Technology Institute (Formerly: Cooling Tower Institute)



DASMA	Door and Access Systems Manufacturer's Association International
DHI	Door and Hardware Institute
DOC	U.S. Department of Commerce – National Institute of Standards and Technology
EIA	Electronic Industries Alliance
DOJ	U.S. department of Justice
EIMA	EIFS Industry Members Association
DOL	U.S. Department of labor
EJCDC	Engineers Joint Contract Documents Committee
DOTn	U.S. Department of Transportation
EN	European Committee of Standards
EJMA	Expansion Joint Manufacturers Association, Inc.
ESD	ESD Association
EVO	Efficiency Valuation Organization
FEMA	Federal Emergency Management Agency
FIBA	Federation Internationale de Basketball Amateur (The International Basketball Federation)
FIVB	Federation Internationale de Volleyball (The International Volleyball Federation)
FMG	FM Global (Formerly: FM - Factory Mutual System)
FMRC	Factory Mutual Research (Now FMG)
FRSA	Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.
FSA	Fluid Sealing Association
FSC	Forest Stewardship Council
GA	Gypsum Association
GANA	Glass Association of North America
GRI	(Now GSI)
GS	Green Seal
GSI	Geosynthetic Institute



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

HI	Hydraulic Institute
HI	Hydronics Institute
HMMA	Hollow Metal Manufacturers Association (Part of NAAMM)
HPVA	Hardwood Plywood & Veneer Association
HPW	H. P. White Laboratory, Inc.
HUD	U.S. Department of Housing and Urban Development
IAPMO	International Association of Plumbing and Mechanical Officials
IAS	International Approval Services (Now CSA International)
IBF	International Badminton Federation
ICC	International Code Council, Inc.
ICEA	Insulated Cable Engineers Association, Inc.
ICRI	International Concrete Repair Institute, Inc.
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers, Inc. (The)
IESNA	Illuminating Engineering Society of North America
IEST	Institute of Environmental Sciences and Technology
IGCC	Insulating Glass Certification Council
IGMA	Insulating Glass Manufacturers Alliance
ILI	Indiana Limestone Institute of America, Inc.
ISO	International Organization for Standardization
ISSFA	International Solid Surface Fabricators Association
ITS	Intertek
ITU	International Telecommunication Union
KCMA	Kitchen Cabinet Manufacturers Association
LMA	Laminating Materials Association (Now part of CPA)
LPI	Lightning Protection Institute
MBMA	Metal Building Manufacturers Association



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

MFMA	Maple Flooring Manufacturers Association, Inc.
MFMA	Metal Framing Manufacturers Association
MH	Material Handling (Now MHIA)
MHIA	Material Handling Industry of America
MIA	Marble Institute of America
MPI	Master Painters Institute
MSS	Manufacturers Standardization Society of The Valve and Fittings Industry Inc.
NAAMM	National Association of Architectural Metal Manufacturers
NACE	NACE International (National Association of Corrosion Engineers International)
NADCA	National Air Duct Cleaners Association
NAGWS	National Association for Girls and Women in Sport
NAIMA	North American Insulation Manufacturers Association
NBGQA	National Building Granite Quarries Association, Inc.
NCAA	National Collegiate Athletic Association (The)
NCMA	National Concrete Masonry Association
NCPI	National Clay Pipe Institute
NCTA	National Cable & Telecommunications Association
NEBB	National Environmental Balancing Bureau
NECA	National Electrical Contractors Association
NeLMA	Northeastern Lumber Manufacturers' Association
NEMA	National Electrical Manufacturers Association
NETA	InterNational Electrical Testing Association
NFHS	National Federation of State High School Associations
NFPA	NFPA (National Fire Protection Association)
NFRC	National Fenestration Rating Council



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

NGA	National Glass Association
NHLA	National Hardwood Lumber Association
NLGA	National Lumber Grades Authority
NIS	National Institute of Standards and Technology
NOFMA	NOFMA: The Wood Flooring Manufacturers Association (Formerly: National Oak Flooring Manufacturers Association)
NRCA	National Roofing Contractors Association
NRMCA	National Ready Mixed Concrete Association
NSF	NSF International (National Sanitation Foundation International)
NSSGA	National Stone, Sand & Gravel Association
NTMA	National Terrazzo & Mosaic Association, Inc. (The)
NTRMA	National Tile Roofing Manufacturers Association (Now TRI)
NWWDA	National Wood Window and Door Association (Now WDMA)
OPL	Omega Point Laboratories, Inc. (Acquired by ITS - Intertek)
PCI	Precast / Pre-stressed Concrete Institute
PDCA	Painting & Decorating Contractors of America
PDI	Plumbing & Drainage Institute
PGI	PVC Geomembrane Institute
PLANET	Professional Landcare Network (Formerly: ACLA - Associated Landscape Contractors of America)
PPS	Power Piping Society
PTI	Post-Tensioning Institute
RCSC	Research Council on Structural Connections
RFCI	Resilient Floor Covering Institute
RIS	Redwood Inspection Service
RMI	Rack Manufacturers Institute
RTI	(Formerly: NTRMA - National Tile Roofing Manufacturers Association) (Now TRI)



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

SAE	SAE International
SCAQMD	South Coast Air Quality Management District
SCS	Scientific Certification System
SDI	Steel Deck Institute
SDI	Steel Door Institute
SEFA	Scientific Equipment and Furniture Association
SGCC	Safety Glazing Certification Council
SHBI	Steel Heating Boiler Institute
SIA	Security Industry Association
SIGMA	Sealed Insulating Glass Manufacturers Association (Now IGMA)
SJI	Steel Joist Institute
SMA	Screen Manufacturers Association
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association
SMPTE	Society of Motion Picture and Television Engineers
SPFA	Spray Polyurethane Foam Alliance (Formerly: SPI/SPFD - The Society of the Plastics Industry, Inc.; Spray Polyurethane Foam Division)
SPIB	Southern Pine Inspection Bureau (The)
SPRI	Single Ply Roofing Industry
SSINA	Specialty Steel Industry of North America
SSPC	SSPC: The Society for Protective Coatings
STI	Steel Tank Institute
SWI	Steel Window Institute
SWRI	Sealant, Waterproofing, & Restoration Institute
TCA	Tile Council of America, Inc.
TIA/EIA	Telecommunications Industry Association/Electronic Industries Alliance
TMS	The Masonry Society



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

TPI	Truss Plate Institute, Inc.
TPI	Turfgrass Producers International
TRI	Tile Roofing Institute (Formerly: RTI - Roof Tile Institute)
UL	Underwriters Laboratories Inc.
ULC	Underwriters Laboratories of Canada
UNI	Uni-Bell PVC Pipe Association
USAV	USA Volleyball
USC	United States Code
USGBC	U.S. Green Building Council
USITT	United States Institute for Theatre Technology, Inc.
WASTEC	Waste Equipment Technology Association
WCLIB	West Coast Lumber Inspection Bureau
WCMA	Window Covering Manufacturers Association (Now WCSC)
WCSC	Window Covering Safety Council (Formerly: WCMA - Window Covering Manufacturers Association)
WDMA	Window & Door Manufacturers Association (Formerly: NWWDA - National Wood Window and Door Association)
WI	Woodwork Institute (Formerly: WIC - Woodwork Institute of California)
WIC	Woodwork Institute of California (Now WI)
WMMPA	Wood Moulding & Millwork Producers Association
WRI	Wire Reinforcement Institute, Inc.
USEPA	United States Environmental Protection Agency
WSRCA	Western States Roofing Contractors Association
WWPA	Western Wood Products Association

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 42 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

REFERENCES
01 42 00 -12



SECTION 01 50 00
TEMPORARY FACILITIES, SERVICES AND CONTROLS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
- a. Temporary Water System
 - b. Temporary Sanitary Facilities
 - c. Temporary Electric Power, Temporary Lighting System, And Site Security Lighting
 - d. Temporary Heat
 - e. Dewatering Facilities And Drains
 - f. Temporary Field Office for Contractor
 - g. Resident Engineer's Office
 - h. Material Sheds
 - i. Temporary Enclosures
 - j. Temporary Partitions
 - k. Temporary Fire Protection
 - l. Work Fence Enclosure
 - m. Rodent and Insect Control
 - n. Plant Pest Control Requirements
 - o. Project Identification Signage
 - p. Security Guards/Fire Guards on Site
 - q. Project Sign and Rendering
 - r. Safety

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 42 00 REFERENCES
- C. Section 01 54 11 TEMPORARY ELEVATORS AND HOISTS
- D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
- E. Section 01 77 00 CLOSE OUT PROCEDURES

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Permanent Enclosure: As determined by Commissioner, permanent or temporary roofing that is complete, insulated, and weather tight; exterior walls which are insulated and weather tight; and all openings that are closed with permanent construction or substantial temporary closures.



- C. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Reports: Submit reports of tests, inspections, meter readings and similar procedures for temporary use.

1.6 PROJECT CONDITIONS:

- A. Temporary Use of Permanent Facilities and Services: The Contractor shall be responsible for the operation, maintenance, and protection of each permanently installed facility and service while in use during construction before Final Acceptance by the City, regardless of previously assigned responsibilities.
- B. Install, operate, maintain and protect temporary facilities, services and controls.
 - 1. Keep temporary services and facilities clean and neat in appearance.
 - 2. Operate temporary services in a safe and efficient manner.
 - 3. Relocate temporary services and facilities as needed as Work progresses.
 - 4. Do not overload temporary services and facilities or permit them to interfere with progress.
 - 5. Provide necessary fire prevention measures.
 - 6. Do not allow hazardous, dangerous or unsanitary conditions, or public nuisances to develop or persist on-site

1.7 NON-REGULAR WORK HOURS (OVERTIME):

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if the Drawings and/or the Specifications indicate that the Work, or specific components thereof, must be performed during other than regular working hours. In such case, all costs for the provision of temporary services, facilities and controls during other than regular working hours shall be deemed included in the total Contract Price.
- B. The Contractor shall provide the temporary services, facilities and controls set forth in this Section during other than regular working hours if a change order is issued directing the Contractor to perform the Work, or specific components thereof, during other than regular working hours. In such case, compensation for the provision of temporary services, facilities and controls during other than regular working hours shall be provided through the change order.

1.8 SERVICES BEYOND COMPLETION DATE:

- A. The Contractor shall provide the temporary services, facilities and controls set forth in this Section until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall provide such temporary services, facilities and controls even if completion of all required work at the site occurs after the time fixed for such completion in Schedule A.



PART II – PRODUCTS

2.1 MATERIALS:

- A. Provide undamaged materials in serviceable condition and suitable for use intended.
- B. Tarpaulins: Waterproof, fire-resistant UL labeled with flame spread rating of 15 or less. For temporary enclosures, provide translucent, nylon-reinforced, laminated polyethylene or polyvinyl chloride, fire-retardant tarpaulins.
- C. Water: Potable and in compliance with requirements of the Department of Environmental Protection.

2.2 EQUIPMENT:

- A. Provide undamaged equipment in serviceable condition and suitable for use intended.
- B. Water Hoses: Heavy-duty abrasive-resistant flexible rubber hoses, 100 feet (30 m) long with pressure rating greater than the maximum pressure of the water distribution system. Provide adjustable shutoff nozzles at hose discharge.
- C. Electric Power Cords: Grounded extension cords.
 - 1. Provide hard-service cords where exposed to abrasion or traffic.
 - 2. Provide waterproof connectors to connect separate lengths of electric cords where single lengths will not reach areas of construction activity.
 - 3. Do not exceed safe length-voltage ratio.
- D. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

PART III – EXECUTION:

3.1 INSTALLATION, GENERAL:

- A. Locate facilities where they will serve the Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities as approved by the Resident Engineer.

3.2 TEMPORARY WATER SYSTEM:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 A

- A. TEMPORARY WATER SYSTEM - NEW FACILITIES: During construction, the Contractor shall furnish a Temporary Water System as set forth below.
 - 1. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Dept. of Environmental Protection for the schedule of charges for water use during construction. The Contractor will be responsible for payment of water charges.
 - 2. Immediately after the Commissioner has issued an order to start work, the Contractor shall file an application with the Department of Environmental Protection's Bureau of Water Supply and obtain a permit to install the temporary water supply system. The system shall be installed and maintained for the use of the Contractor and its subcontractors. A copy of the above mentioned permit shall be filed with the Commissioner. The Contractor shall provide temporary water main, risers and waste stacks as directed and install on each floor, outlets with two (2) 3/4" hose valve connections over a barrel installed on a steel pan. The Contractor shall provide drains from the pans to the stack and house sewer and hose bibs to drain the water supply



risers and mains. During winter months, the Contractor shall take the necessary precautions to prevent the temporary water system from freezing. The Contractor shall provide repairs to the temporary water supply system for the duration of the project until said temporary system is dismantled and removed.

3. Disposition of Temporary Water System: The Contractor shall be responsible for dismantling the temporary water system when no longer required for the construction operations, or when replaced by the permanent water system installed for the project, or as otherwise directed by the Resident Engineer. All repair work resulting from the dismantling of the temporary water system shall be the responsibility of the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2 B

B. TEMPORARY WATER SYSTEM – PROJECTS IN EXISTING FACILITIES:

1. When approved by the Commissioner, use of existing water system will be permitted for temporary water service during construction, as long as the system is cleaned and maintained in a condition acceptable to the Commissioner. At Substantial Completion, the Contractor shall restore the existing water system to conditions existing before initial use.
2. The Contractor shall be responsible for all repairs to the existing water system permitted to be used for temporary water service during construction. The Contractor shall be responsible to maintain the existing system in a clean condition on a daily basis, acceptable to the Commissioner.
3. The Contractor will be responsible for payment of water charges as directed by the Commissioner. Billing will be in accordance with the Department of Environmental Protection schedule of charges for Building Purposes.

C. WASH FACILITIES: The Contractor shall install wash facilities supplied with potable water at convenient locations for personnel involved in handling materials that require wash-up for a healthy and sanitary condition.

1. Dispose of drainage properly.
2. Supply cleaning compounds appropriate for each condition.
3. Include safety showers, eyewash fountains and similar facilities for the convenience, safety and sanitation of personnel.

D. DRINKING WATER FACILITIES: The Contractor shall provide drinking water fountains or containerized tap-dispenser bottled-drinking water units, complete with paper cup supplies. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg. F (7 to 13 deg. C).

3.3 TEMPORARY SANITARY FACILITIES:

- A. The Contractor shall provide toilets, wash facilities and drinking water fixtures in compliance with regulations and health codes for type, number, location, operation and maintenance of fixtures and facilities. Provide toilet tissue, paper towels, paper cups and similar disposable materials as appropriate for each facility, and provide covered waste containers for used materials.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 B

B. SELF-CONTAINED TOILET UNITS:

1. The Contractor shall provide temporary single-occupant toilet units of the chemical, aerated recirculation, or combustion type for use by all construction personnel. Units shall be properly vented and fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material. Quantity of toilet units shall comply with the latest OSHA regulations.
2. Toilets: Install separate self-contained toilet units for male and female personnel. Shield toilets to ensure privacy.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3 C

C. EXISTING TOILETS:

1. **TOILET FACILITIES:** When approved by the Commissioner, the Contractor shall arrange for the use of existing toilet facilities by all personnel during the execution of the work. The Contractor shall be responsible to clean and maintain facilities in a condition acceptable to the Resident Engineer and, at completion of construction, to restore facilities to their condition at the time of initial use.
2. **MAINTENANCE** - The Contractor shall maintain the temporary toilet facilities in a clean and sanitary manner and make all necessary repairs.
3. **NUISANCES** - The Contractor shall not cause any sanitary nuisance to be committed by its employees or the employees of its subcontractors in or about the work, and shall enforce all sanitary regulations of the City and State Health Authorities.

3.4 TEMPORARY ELECTRIC POWER, TEMPORARY LIGHTING SYSTEM, AND SITE SECURITY LIGHTING:

- A. **SCOPE:** This Section sets forth the General Conditions and procedures relating to Temporary Electric Power, Temporary Lighting System and Site Security Lighting during the construction period.
- B. **TEMPORARY ELECTRIC POWER:**
The Contractor shall provide and maintain a Temporary Electric Power service and distribution system of sufficient size, capacity and power characteristics required for construction operations for all required work by the Contractor and its subcontractors, including but not limited to power for the Temporary Lighting System, Site Security Lighting, construction equipment, hoists, temporary elevators and all field offices. Temporary Electric Power shall be provided as follows:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (1)

1. **CONNECTION TO UTILITY LINES:**
 - a. **Temporary Electric Power Service** for use during construction shall be provided as follows: The Contractor shall make all necessary arrangements with the Public Utility Company and pay all charges for the Temporary Electric Power system. The Contractor shall include in its total Contract Price any charges for Temporary Electric Power, including charges that may be made by the Public Utility Company for extending its electrical facilities, and for making final connections. The Contractor shall make payment directly to the Public Utility Company.
 - b. **APPLICATIONS FOR METER:** The Contractor shall make application to the Public Utility Company and sign all documents necessary for, and pay all charges incidental to, the installation of a watt hour meter or meters for Temporary Electric Power. The Contractor shall pay to the Public Utility Company, all bills for Temporary Electric energy used throughout the work, as they become due.
 - c. **SERVICE AND METERING EQUIPMENT** - The Contractor shall furnish and install, at a suitable location on the site, approved service and metering equipment for the Temporary Electric Power System, ready for the installation of the Public Utility Company's metering devices. The temporary service mains to and from the metering location shall be not less than 100 Amperes, 3-phase, 4-wire and shall be of sufficient capacity to take care of all demands for all construction operations and shall meet all requirements of the NYCEC.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (2)

2. CONNECTION TO EXISTING ELECTRICAL POWER SERVICE:
- a. When approved by the Commissioner, electrical power service for the Temporary Lighting System and for the operation of small tools and equipment less than ¼ horsepower may be taken from the existing electric distribution system if the existing system is of adequate capacity for the temporary power load. The Contractor shall cooperate and coordinate with the facility custodian, so as not to interfere with the normal operation of the facility.
 - b. There will be no charge to the Contractor for the electrical energy consumed.
 - c. The Contractor shall provide, maintain and pay all costs for separate temporary electric power for any temporary power for equipment larger than 1/4 horsepower. When directed by the Commissioner, the Contractor shall remove its own temporary power system.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 B (3)

3. ELECTRICAL GENERATOR POWER SERVICE:
- a. When connection to Utility Lines or existing facility electric service is not available or is not adequate to supply the electric power need for construction operations, the Contractor shall provide self-contained generators to provide power beyond that available.
 - b. Pay for all energy consumed in the progress of the Work, exclusive of that available from the existing facility or Utility Company.
 - c. Provide for control of noise from the generators.
 - d. Comply with the Ultra Low Sulfur Fuel in Non-Road Vehicles requirements as set forth in Article 5.4 of the Contract.

C. USE OF COMPLETED PORTIONS OF THE ELECTRICAL WORK:

1. USE OF MAIN DISTRIBUTION PANEL: As soon as the permanent electric service feeders and equipment, metering equipment and main distribution panel are installed and ready for operation, the Contractor shall have the temporary lighting and power system changed over from the temporary service points to the main distribution panel.
2. COST OF CHANGE OVER - The Contractor shall be responsible for all costs due to this change over of service and it shall also make application to the Public Utility Company for a watt hour meter to be set on the permanent meter equipment.
3. The requirements for temporary electric power service specified herein shall be adhered to after change over of service until final acceptance of the project.
4. NO EXTRA COST - The operation of the service and switchboard equipment shall be under the supervision of the Contractor, but this shall in no way be interpreted to mean the acceptance of such part of the installation or relieve the Contractor from its responsibility for the complete work or any part thereof. There shall be no additional charge for supervision by the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 D

D. TEMPORARY LIGHTING SYSTEM:

1. The Contractor shall provide adequate service for the temporary lighting system, or a minimum of 100 Amperes, 3-phase, 4-wire service for the temporary lighting system, whichever is



- greater, and make all necessary arrangements with the Public Utility Company and pay all charges by them for the Temporary Lighting System
2. The Contractor shall furnish and connect to the metered service point, a Temporary Lighting System to illuminate the entire area where work is being performed and points adjacent to the work, with separately fused circuits for stairways and bridges. Control switches for stairway circuits shall be located near entrance on ground floor.
 3. ITEMS: The Temporary Lighting System provided by the Contractor shall consist of wiring, fixtures, left-hand double sockets, (one (1) double socket for every 400 square feet, with one (1) lamp and one (1) three-prong outlet) lamps, fuses, locked type guards, pigtails and any other incidental material. Additional details may be outlined in the detailed Specifications for the Electrical Work. Changes may be made, provided the full equivalent of those requirements is maintained.
 4. The Temporary Lighting System shall be progressively installed as required for the advancement of the work under the Contract.
 5. RELOCATION: The cost for the relocation or extension of the original Temporary Lighting System, required by the Contractor or its subcontractors, that is not required due to the normal advancement of the work, as determined by the Resident Engineer, shall be borne by the Contractor.
 6. PIGTAILS: shall be furnished with left-hand sockets with locked type guards and 40 feet of rubber covered cable. The Contractor shall furnish and distribute a minimum of three (3) complete pigtails to each subcontractor. See the detailed Electrical Specifications for possible additional pigtails required.
 7. LAMPS: The Contractor shall furnish and install one (1) complete set of lamps, including those for the trailers. Broken and burned out lamps in the temporary lighting system, DDC field office and construction trailers, shall be replaced by the Contractor. All lamps shall be compact fluorescent
 8. CIRCUIT PROTECTION: The Contractor shall furnish and install GFI protection for the Temporary Lighting and Site Security Lighting Systems.
 9. MAINTENANCE OF TEMPORARY LIGHTING SYSTEM:
 - a. The Contractor shall maintain the Temporary Lighting System in good working order during the scheduled hours established.
 - b. The Contractor shall include in its total Contract Price all costs in connection with the Temporary Lighting System, including all costs for installation, maintenance and electric power.
 10. REMOVAL OF TEMPORARY LIGHTING SYSTEM: The temporary lighting system shall be removed by the Contractor when authorized by the Commissioner.
 11. HAND TOOLS: The temporary lighting system shall not be used for power purposes, except that light hand tools not larger than 1/4 horsepower may be operated from such system by the Contractor and its subcontractors.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4 E

- E. SITE SECURITY LIGHTING (FOR NEW CONSTRUCTION ONLY):
1. The Contractor shall furnish, install and maintain a system of site security lighting, as herein specified, to illuminate the construction site of the project, and it shall be connected to and energized from the Temporary Lighting System. All costs in connection with site security lighting shall be deemed included in the total Contract Price.
 2. It is essential that the site security lighting system be completely installed and operating, at the earliest possible date. The Contractor shall direct its subcontractors to cooperate, coordinate and exert every effort to accomplish an early complete installation of the site security lighting system. After the system is installed and in operation, if a part of the system interferes with the work of any trade, the Contractor shall be completely responsible for the expense of removing,



- relocating and replacing all equipment necessary to reinstate the system to proper operating conditions.
3. The system shall consist of flood lighting by pole mounted guarded sealed-beam units. Floodlight units shall be mounted 16 feet above grade. Floodlights shall be spaced around the perimeter of the site to produce an illumination level of no less than one (1) foot candle around the perimeter of the site, as well as in any potentially hazardous area or any other area within the site that might be deemed by the Resident Engineer to require security illumination. The system shall be installed in a manner acceptable to the Resident Engineer. The first lighting unit in each circuit shall be provided with a photoelectric cell for automatic control. The photoelectric cell shall be installed as per manufacturer's recommendations.
 4. All necessary poles shall be furnished and installed by the Contractor.
 5. The site security lighting shall be kept illuminated at all times during the hours of darkness. The Contractor shall, at its own expense, shall keep the system in operation, and shall furnish and install all material necessary to replace all damaged or burned out parts.
 6. The Contractor shall be on telephone call alert for maintaining the system during the operating period stated above.
 7. All materials and equipment furnished under this section shall remain the property of the Contractor and shall be removed and disposed of by the Contractor when authorized in writing by the Resident Engineer.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.5

3.5 TEMPORARY HEAT:

A. GENERAL:

1. Definition: The provision of Temporary Heat shall mean the provision of heat in order to permit construction to be performed in accordance with the Progress Schedule during all seasons of the year and to protect the work from the harmful effects of low temperature. In the event the building, or any portion thereof, is occupied during construction, the provision of Temporary Heat shall include the provision of heat to permit normal operations in such occupied areas.
 - a. The provision of Temporary Heat shall be in accordance with the temperature requirements set forth in Sub-Section 3.5 C herein.
 - b. The provision of Temporary Heat shall include the provision of: 1) all fuel necessary and required, 2) all equipment necessary and required, and 3) all operating labor necessary and required. Operating labor shall mean that minimum force required for the safe day to day operation of the system for the provision of Temporary Heat and shall include, without limitation, heating maintenance labor and/or Fire Watch as required by NYC Fire Department regulations. Operating labor may be required seven (7) days per week and during other than normal working hours, for the period of time required by seasonal weather conditions.
 - c. In the event the building, or any portion thereof, is occupied and the Project involves the replacement, modification and/or shut down of the permanent heating system, or any key component thereof; and such system is a combined system which furnishes domestic hot water for the building occupants, the provision of Temporary Heat shall include the provision of domestic hot water at the same temperature as the system which is being replaced. Domestic hot water shall be provided in accordance with the phasing requirements set forth in the Contract Documents.
2. Responsibility: The Contractor's responsibility for the provision of Temporary Heat, including all expenses in connection therewith, shall be as set forth below:
 - a. Projects Involving Enclosure of the Building:



- 1) Prior to Enclosure - Until the Commissioner determines that the building has been enclosed, as set forth in Sub-Section 3.5 B; the Contractor shall be responsible for the provision of Temporary Heat.
 - 2) Post Enclosure - Once the Commissioner determines that the building, or any portion thereof, has been enclosed, as set forth in Sub-Section 3.5 B, the Contractor shall be responsible for the provision of Temporary Heat by one or more of the following means: 1) by an existing heating system (if any), 2) by a permanent heating system which is being installed as part of the Project, or 3) by a temporary heating system(s).
 - 3) The Contractor shall, within two (2) weeks of the kick-off meeting, submit to DDC for review its proposed plan to provide Temporary Heat. Such plan is subject to approval by the Resident Engineer. The Contractor shall provide Temporary Heat in accordance with the approved plan until written acceptance by the Commissioner of the work of all Contractors, including punch list work, unless directed otherwise in writing by the Commissioner. The responsibility of the Contractor provided for herein is subject to the exception set forth in Sub-Section 3.5 A.2 (b) herein.
- b. Projects not involving Enclosure of the Building:
- 1) If the Project involves the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, the Contractor shall be responsible for the provision of Temporary Heat, except as otherwise provided in Sub-Section 3.5 H.3(b).2 herein.
 - 2) If the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof; there is no Contractor responsibility of the provision of Temporary Heat, unless otherwise specified in the Contract Documents. However, if the Commissioner, pursuant to Sub-Section 3.5 H.3 (b).1 herein, determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat and shall be paid for the same in accordance with Sub-Section 3.5 H.3 (b).1 herein.
- B. ENCLOSURE OF STRUCTURES:
1. Notification: The Contractor shall notify all its subcontractors and the Resident Engineer at least 30 days prior to the anticipated date that the building(s) will be enclosed.
 2. Commissioner Determination: The Commissioner shall determine whether the building, or any portion thereof, has been enclosed. As indicated in Sub-Section 3.5 A.2 above, once the building has been enclosed, the Contractor shall be responsible for the provision of Temporary Heat. The Commissioner's determination with respect to building enclosure shall be based upon all relevant facts and circumstances, including without limitation, 1) whether the building meets the criteria set forth in Paragraph 3 below, and 2) whether the openings in the building, such as doorways and windows, have been sufficiently covered so as to provide reasonable heat retention and protection from the elements
 3. Criteria for enclosure:
 - a. Roof Area:
 - 1) A building shall be considered to be roofed when the area to be roofed is covered by a permanent structure and all openings through the permanent structure are covered and protected by temporary covers as described in Paragraph (c) below.
 - 2) Intermediate floor structures of multi-floor buildings shall be considered to be roofed subject to the same requirements of the building roof.



- 3) The final roofing system need not be in place for the building or structure to be determined to be enclosed; provided, however, all openings through the permanent structure covering the roof must be covered and protected by temporary covers, as described in Paragraph (c) below.
- b. Walls: For the walls to be determined to be enclosed permanent exterior wall elements or facing material must be in place and all openings must be covered and protected by temporary covers, as described in Paragraph (c) below.
- c. Temporary Covers: In order to be acceptable, temporary covers must be securely fixed to prevent the entrance of rain, snow and direct wind. The minimum material requirements for temporary covers are as follows: 1) minimum 10 mil. Plastic 2) minimum 12 ounce waterproof canvas tarpaulins, or 3) a minimum three-eighths (3/8) inch thickness exterior grade plywood.
- d. Temporary covers for openings shall be the responsibility of the Contractor and such work shall be deemed included in the Contract price.

C. TEMPERATURE REQUIREMENTS:

- 1. Unoccupied Buildings: The temperature requirement for the provision of Temporary Heat in unoccupied buildings shall be the GREATER of the following: 1) 50 degrees Fahrenheit, or 2) the temperature requirement for the particular type of work set forth in the Contract Documents.
- 2. Occupied Buildings: The temperature requirement for the provision of Temporary Heat in occupied buildings, or portions thereof, shall be the GREATER of the following: 68 degrees Fahrenheit or the temperature requirement for the particular type of work set forth in the Contract Documents.

D. DURATION:

- 1. The Contractor shall be required to provide Temporary Heat until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. The Contractor shall be responsible for the provision of Temporary Heat for the time specified herein, regardless of any delays in completion of the Project, including delays that result in the commencement of the provision of Temporary Heat during a season that is later than that which may have been originally anticipated. The Contractor shall include in its Total Contract Price all expenses in connection with the provision of Temporary Heat in accordance with the requirements specified herein.
- 2. The total Contract duration is set forth in consecutive calendar days in Schedule A of the Addendum. The Table set forth below indicates the number of full heating seasons that are deemed included in various contract durations, which are specified in consecutive calendar days (ccds). At a minimum, a full heating season shall extend from October 15th to April 15th.

Contract Duration	Full Heating Seasons Required
up to 360 ccds	1 full heating season
360 to 720 ccds	2 full heating seasons
more than 720 ccds	3 full heating seasons

E. METHOD OF TEMPORARY HEAT:

- 1. The method of temporary heat shall be in conformance with the New York City Fire Code and with all applicable laws, rules and regulations. Prior to implementation, such method shall be subject to the written approval of the Commissioner.
- 2. The method of temporary heat shall:
 - a. Not cause the deposition of dirt or smudges upon any finished work or cause any defacement or discoloration to the finished work.
 - b. Not be injurious or harmful to people or materials.



- c. Portable fueled heating devices or equipment SHALL NOT BE ALLOWED for use as temporary heat other than construction-related curing or drying in conformance with the NYC Fire Code.
 3. No open fires will be permitted.
- F. TEMPORARY HEATING SYSTEM:
1. The temporary system for the provision of Temporary Heat provided by the Contractor following enclosure of the building shall be complete including, subject to provisions of paragraph E above, boilers pumps, radiators, space heaters, water and heating piping, insulation and controls. The temporary system for the provision of Temporary Heat shall be capable of maintaining the minimum temperature requirements set forth in Paragraph C above.
- G. COORDINATION:
1. The Contractor, in the provision of Temporary Heat, shall coordinate its operations in order to insure sufficient and timely performance of all required work, including work performed by trade subcontractors. The Contractor shall supply and pay for all water required and used in the building for the operation of the heating system(s) for the purpose of Temporary Heat. The Contractor shall include all expenses in connection with the supply of water for Temporary Heat in its Total Contract Price. During the period in which Temporary Heat in an enclosed building is being furnished and maintained, the Contractor shall provide proper ventilating and drying, open and close the windows and other openings when necessary for the proper execution of the work and also when directed by DDC. The Contractor shall maintain all permanent or temporary enclosures at its own expense.
- H. USE OF PERMANENT HEATING SYSTEMS:
1. Use of Permanent Heating System for Temporary Heat after Building Enclosure
 - a. The Contractor shall provide all labor and materials to promptly furnish and set all required equipment and convectors and/or radiators, piping, valves, fitting, etc., in ample time for their use for the provision of Temporary Heat after enclosure of the building.
 - b. New portions of the permanent heating system that are used for furnishing Temporary Heat shall be left in near perfect condition when delivered to the City for operation. Any repairs required, other than for ordinary wear and tear on the equipment, shall be made by the Contractor at his/her expense. The starting date for the warranty or guarantee period for such equipment shall be the date of Substantial Completion acceptance.
 - c. In the event that the Contractor does not advance the installation of the permanent heating system in sufficient time to permit its use for Temporary Heat as determined by DDC, the Contractor shall furnish and install a separate system for the provision of Temporary Heat as required to maintain the minimum temperature requirements set forth in Paragraph C above.
 2. All equipment for the system for the provision of Temporary Heat shall be placed so as to comply with the requirements specified hereinbefore, and shall be connected, disconnected and suitably supported and located so as to permit construction work, including finish work such as wall plastering and painting, to proceed. The installation of the system for the provision of Temporary Heat by the Contractor, including the placing of ancillary system equipment, shall be coordinated with the operations of all trade subcontractors so as to insure sufficient and timely performance of the work. Once the permanent heating system is operating properly, the Contractor shall remove all portions of the system for Temporary Heat not part of the permanent heating system.
 3. Temporary Heat Allowance for Special Conditions or and/or Unforeseen Circumstances.
 - a. The City may establish an allowance in the Contract for payment of costs and expenses in connection with the provision of Temporary Heat as set forth herein. If established, the City will include an amount for such allowance on the Bid Form, and the Contractor shall



include such allowance amount in its Total Contract Price. The Contractor shall only be entitled to payment from this allowance under the conditions and in accordance with the requirements set forth below. In the event this allowance or any portion thereof remains unexpended at the conclusion of the Contract, such allowance shall remain the sole property of the City. Should the amount of the allowance be insufficient to provide payment for the expenses specified below, the City will increase the amount of the allowance.

- b. The allowance set forth herein may be utilized only under the conditions set forth below.
 1. In the event the Project does not involve the installation of a new permanent heating system if one did not exist previously, or the replacement, modification and/or shut down of the existing permanent heating system, or any key component thereof, and the Commissioner determines that the provision of Temporary Heat is necessary due to special and/or unforeseen circumstances, the Contractor shall be responsible for the provision of Temporary Heat, as directed by the Commissioner. The City shall pay such Contractor for all costs for labor, material, and equipment necessary and required for the same. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
 2. In the event the Commissioner determines that there is a need for maintenance of the permanent heating system by the Contractor after written acceptance by the Commissioner of the work, and that the need for such maintenance is not the fault of the Contractor, the Contractor shall provide the required maintenance of the permanent heating system for the period of time directed by the Commissioner. The City shall pay the Contractor for the cost of direct labor and fuel necessary and required in connection with such maintenance, excluding the cost of any foremen or other supervision. Payment shall be made in accordance with Article 26 of the Contract, except that the cost of fuel shall be as set forth in Paragraph (c) below.
- c. Payment for Fuel Costs - Payment from the allowance set forth herein for the cost of fuel necessary and required to operate the system for the provision of Temporary Heat or to maintain the permanent heating system under the conditions set forth in Paragraph b above shall be limited to the direct cost of such fuel. The Contractor shall not be entitled to any overhead and/or profit for such fuel costs. In order to receive payment for such fuel costs, the Contractor must present original invoices for the same. DDC reserves the right to furnish the required fuel.

I. RELATED ELECTRICAL WORK:

1. The Contractor shall be responsible for providing the items set forth below and shall include all expenses in connection with such items in its Total Contract Price. The Contractor shall provide such items promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
 - a. The Contractor shall provide all labor, materials, equipment and power necessary and required to furnish and maintain any temporary or permanent electrical connections to all equipment specified to be connected as part of the work of his Contract.
 - b. The Contractor shall supply and pay for all power necessary and required for the operation of the system for the provision of Temporary Heat and/or the permanent heating system used for Temporary Heat. Such power shall be provided by the Contractor for the duration the Contractor is required to provide Temporary Heat, as set forth in Sub-Section 3.5 D herein.
2. In providing the items set forth in Paragraph 1 above, the Contractor is advised that labor may be required seven (7) days a week and/or during other than normal working hours for the period of time required by seasonal weather conditions.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

J. RELATED PLUMBING WORK:

1. The Contractor shall be responsible for providing all labor, materials and equipment necessary and required to furnish and maintain all temporary or permanent connections to all equipment or plumbing outlets specified to be provided as part of the work of this Contract. The Contractor shall include all expenses in connection with such items of work in its Total Contract Price. The Contractor shall provide such items of work promptly when required and shall in all respects coordinate its work with the work performed by trade subcontractors in order to facilitate the provision of Temporary Heat.
2. In the event portions of the permanent plumbing equipment furnished by the Contractor as part of the work of this Contract are used for the provision of Temporary Heat either during construction or prior to acceptance by the City of the complete plumbing system, the Contractor shall be responsible to provide such plumbing equipment to the City in near perfect condition and shall make any repairs required, other than for ordinary wear and tear on the equipment, at his expense. The starting date for warranty and/or guarantee period for such plumbing equipment shall be the date of Substantial Completion acceptance by the City.
3. For Projects requiring the installation of new and/or modified gas service, as well as associated meter installations, the Contractor shall promptly perform all required filings and coordination with the Utility Companies in order to expedite the installation, testing, and approval of the gas service and associated meter(s).

3.6 STORM WATER CONTROL, DEWATERING FACILITIES AND DRAINS:

A. PUMPING:

1. Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of storm water from heavy rainfall.
2. Contractor shall furnish and install all necessary automatically operated pumps of adequate capacity with all required piping to run-off agencies, so as to maintain the excavation, cellar floor, pits and exterior depressions and excavations free from accumulated water during the entire period of construction and up to the date of final acceptance of work of the Contract.
3. All pumps shall be maintained at all times in proper working order.
4. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties nor endanger permanent Work or temporary facilities.
5. Remove snow and ice as required to minimize accumulations.

3.7 TEMPORARY FIELD OFFICE FOR CONTRACTOR:

- A. The Contractor shall establish a temporary field office for its own use at the site during the period of construction, at which readily accessible copies of all Contract Documents shall be kept.
- B. The field office shall be located where it will not interfere with the progress of any part of the work or with visibility of traffic control devices.
- C. **CONTRACTOR'S REPRESENTATIVE:** In charge of the office there shall be a responsible and competent representative of the Contractor, duly authorized to receive orders and directions and to put them into effect.
- D. Arrangements shall be made by the Contractor whereby its representative may be readily accessible by telephone.
- E. All temporary structures shall be of substantial construction and neat appearance, and shall be painted a uniform gray unless otherwise directed by the Commissioner.
- F. **CONTRACTOR'S SIGN** - The Contractor shall post and keep posted, on the outside of its field office, office or exterior fence or wall at site of work, a legible sign giving full name of the company, address of the company and telephone number(s) of responsible representative(s) of the firm who can be reached in event of an emergency at any time.



- G. ADVERTISING PRIVILEGES - The City reserves the right to all advertising privileges. The Contractor shall not cause any signs of any kind to be displayed at the site unless specifically required herein or authorized by the Commissioner.

3.8 DDC FIELD OFFICE:

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 A

- A. OFFICE SPACE IN EXISTING BUILDING:
1. The Resident Engineer will arrange for office space for sole use in the building where work is in progress. The Contractor shall provide and install a lockset for the door to secure the equipment in the room. The Contractor shall provide two (2) keys to the Resident Engineer. After completion of the project the Contractor shall replace the original lockset on the door and ensure its proper operation.
 2. In addition to equipment specified in Sub-Section 3.8 D, the Contractor shall provide, for exclusive use of the DDC Field Office, the following:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two metal (2) lockers, single units, 15" x 18" x 78" overall including 6" legs. Lockers to have flat key locks with two (2) keys each, General Steel products or approved equal. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks, approximately 52"H x 28 1/2"D x 18"W.
 - b. One (1) 9000 B.T.U air conditioner or as directed by Commissioner. Wiring for the air conditioner shall be minimum No. 12 AWG fed from individual circuits in the fuse box.
 - c. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - d. Two (2) metal wastebaskets.
 - e. One (1) fire extinguisher, one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - f. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the project as required.
 3. The Contractor shall provide one (1) telephone, where directed and shall pay all costs for telephone service for calls within the New York City limits for the duration of the project.
 4. All furniture and equipment, except computer equipment specified in Sub-Section 3.8 D.3, shall remain the property of the Contractor.
 5. Computer Workstation quantities shall be provided as specified in Sub-Section 3.8 B 3-a for DDC Managed Projects, or Sub-Section 3.8 B 3-b for CM Managed projects.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 B

- B. DDC FIELD OFFICE TRAILER:
1. GENERAL: The Contractor shall, for the time frame specified herein, provide and maintain at its own cost and expense a DDC Construction Field Office and all related items as specified herein [hereinafter collectively referred to as the "DDC Field Office"] for the exclusive use of the Resident Engineer. The DDC Field Office shall be located at the Project site and shall be solely dedicated to the Project. Provision of the DDC Field Office shall commence within THIRTY (30) days from Notice to proceed and shall continue through forty-five (45) days after Substantial Completion of the required construction at the Project site. The Contractor shall remove the DDC Field Office forty-five (45) days after Substantial Completion of the required construction, or as otherwise directed in writing by the Commissioner.
 2. TRAILER: The Contractor shall provide at its own cost and expense a mobile office trailer for use as the DDC Field Office. The Contractor shall install and connect all utility services to the



trailer within thirty (30) days from Notice to Proceed. The trailer shall have equipment in compliance with the minimum requirements hereinafter specified. Any permits and fees required for the installation and use of said trailer shall be borne by the Contractor. The trailer including furniture and equipment therein, except computer equipment specified in Sub-Section 3.8D.3 herein, shall remain the property of the Contractor.

3. Trailer shall be an office type trailer of the size specified herein, with exterior stairs at entrance. Trailer construction shall be minimum 2 x 4 wall construction fully insulated with paneled interior walls, pre-finished gypsum board ceilings and vinyl tile floors.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8.B.3a or
SUB-SECTION 3.8.B.3b.**

- a. DDC Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 32 Feet
Overall width: 10 Feet
 - 2) Interior Layout:
Provide one (1) general office/conference room area and one (1) private office at one end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
 - 3) Computer Workstation: Provide one (1) complete computer workstation, as specified in Sub-Section 3.8.D herein, in the private office area as directed by the Resident Engineer.

- b. CM Managed Project Trailer: DDC Field Office Trailer Size, Layout and Computer Workstation:
 - 1) Overall length: 50 Feet
Overall width: 10 Feet
 - 2) Interior Layout:
Provide one (1) large general office/conference room in the center of the trailer and two (2) private offices, one (1) each at either end of the trailer. Provide equipment and amenities as specified in Sub-Section 3.8.B herein.
 - 3) Computer Workstation:
Provide three (3) complete computer workstations as specified in Sub-Section 3.8.D herein. Provide one (1) each complete computer workstation in each private office and one (1) complete computer workstation at the secretarial position as directed by the Resident Engineer.

4. The exterior of the trailer shall be lettered with black block lettering of the following heights with white borders:

CITY OF NEW YORK	2-1/2"
DEPARTMENT OF DESIGN AND CONSTRUCTION	3-3/4"
DIVISION OF PUBLIC BUILDINGS	3-1/2"
DDC FEILD OFFICE	2-1/2"

NOTE: In lieu of painting letters on trailer the Contractor may substitute a sign constructed of a good quality weatherproof material with the same type and size of lettering above.

5. All windows and doors shall have aluminum insect screens. Provide wire mesh protective guards at all windows.
6. The interior shall be divided by partitions into general and private office areas as specified herein. Provide a washroom located adjacent to the private office and a built-in wardrobe closet opposite the washroom. Provide a built-in desk in the private office(s) with fixed overhead shelf and clearance below for two (2) file cabinets.



7. Provide a built-in drafting or reference table, located in the general office/conference room, at least 60 inches long by 36 inches wide with cabinet below and wall type plan rack at least 42 inches wide.
8. The washroom shall be equipped with a flush toilet, wash basin with two (2) faucets, medicine cabinet, complete with supplies and a toilet roll tissue holder. Plumbing and fixtures shall be approved house type, with each appliance trapped and vented and a single discharge connection. Five (5) gallon capacity automatic electric heater for domestic hot water shall be furnished.
9. HVAC: The trailer shall be equipped with central heating and cooling adequate to maintain a temperature of 72 degrees during the heating season and 75 degrees during the cooling season when the outside temperature is 5 degrees F. winter and 89 degrees F. summer.
10. Lighting shall be provided via ceiling mounted fluorescent lighting fixtures to a minimum level of 50 foot candles in the open and private office(s) along with sufficient lighting in the washroom. Broken and burned out lamps shall be replaced by the Contractor. A minimum of four (4) duplex convenience outlets shall be provided in the open office and two (2) each in the private office(s). These outlets shall be in addition to special outlet requirements for computer stations, copiers, HVAC unit, etc.
11. Electrical service switch and panel shall be adequately sized for the entire trailer load. Provide dedicated circuits for HVAC units, hot water heater, copiers and other equipment as required. All wiring and installation shall conform to the New York City Electrical Code.
12. The following movable equipment shall be furnished:
 - a. Two (2) single pedestal desks, 42" x 32"; two (2) swivel chairs with arms and three (3) side chairs without arms to match desk. Two (2) full ball bearing suspension four (4) drawer vertical legal filing cabinets with locks and two (2) full ball bearing two (2) drawer vertical legal filing cabinets in each private office located below built-in desk.
 - b. One (1) folding conference table, 96" x 30" and ten (10) folding chairs.
 - c. Three (3) metal wastebaskets.
 - d. One (1) fire extinguisher one (1) quart vaporizing liquid type, brass, wall mounted by Pyrene No. C21 or approved equal.
 - e. One (1) Crystal Springs water cooler with bottled water, Model No. LP14058 or approved equal to be furnished for the duration of the Contract as required.
13. TRAILER TEMPORARY SERVICE: Plumbing and electrical work required for the trailer will be furnished and maintained as below.
 - a. PLUMBING WORK: The Contractor shall provide temporary water and drainage service connections to the DDC Field Office trailer for a complete installation. Provide all necessary soil, waste, vent and drainage piping.

Contractor to frost-proof all water pipes to prevent freezing.

 - 1) REPAIRS, MAINTENANCE: The Contractor shall provide repairs for the duration of the project until the trailer is removed from the site.
 - 2) DISPOSITION OF PLUMBING WORK: At the expiration of the time limit set forth in Article 3.8 A.14(c).4 herein, the temporary water and drainage connections and piping to the DDC Field Office trailer shall be removed by the Contractor and shall be plugged at the mains. All piping shall become the property of the Contractor for Plumbing Work and shall be removed from the site, all as directed. All repair work due to these removals shall be the responsibility of the Contractor.
 - b. ELECTRICAL WORK:
 - 1) The Contractor shall furnish, install and maintain a temporary electric feeder to the DDC Field Office trailer immediately after it is placed at the job site.
 - 2) The temporary electrical feeder and service switch/fuse shall be adequately sized based on the trailer load and installed per the New York City Electrical Code and complying with utility requirements.



- 3) Make all arrangements and pay all costs to provide electric service.
 - 4) The Contractor shall pay all costs for current consumed and for maintenance of the system in operating condition, including the furnishing of the necessary bulb replacements lamps, etc., for the duration of the project and for a period of forty-five (45) days after the date of Substantial Completion.
 - 5) Disposition of Electric Work: At the expiration of the time limit set forth, the temporary feeder, safety switch, etc., shall be removed and disposed of as directed.
 - 6) All repair work due to these removals shall be the responsibility of the Contractor.
- c. MAINTENANCE
- 1) The Contractor shall provide and pay all costs for regular weekly janitor service and furnish toilet paper, sanitary seat covers, cloth towels and soap and maintain the DDC Field Office in first-class condition, including all repairs, until the trailer is removed from the site.
 - 2) Supplies: The Contractor shall be responsible for providing (a) all office supplies, including without limitation, pens, pencils, stationery, filtered drinking water and sanitary supplies, and (b) all supplies in connection with required computers and printers, including without limitation, an adequate supply of blank CD's/DVD's, storage boxes for blank CDs/DVDs, and paper and toner cartridges for the printer.
 - 3) Risk of Loss: The entire risk of loss with respect to the DDC Field Office and equipment shall remain solely and completely with the Contractor. The Contractor shall be responsible for the cost of any insurance coverage determined by the Contractor to be necessary for the Field Office.
 - 4) At forty-five (45) days after the date of Substantial Completion, or sooner as directed by the Commissioner, the Contractors shall have all services disconnected and capped to the satisfaction of the Commissioner. All repair work due to these removals shall be the responsibility of the Contractor.
- d. TELEPHONE SERVICE: The Contractor shall provide and pay all costs for the following telephone services for the DDC Field Office trailer:
- 1) Separate telephone lines for one (1) desk phone in each private office.
 - 2) One (1) wall phone (with six (6) foot extension cord) at plan table.
 - 3) Separate telephone lines for the fax machine and internet access in each private office. Telephone service shall include voice mail.
 - 4) A remote bell located on outside of trailer
 - 5) The telephone service shall continue until the trailer is removed from the site.
- e. PERMITS: The Contractor shall make the necessary arrangements and obtain all permits and pay all fees required for this work.
- C. RENTED SPACE: The Contractor has the option of providing, at its cost and expense, rented office or store space in lieu of trailer. Said space shall be in the immediate area of the Project and have adequate plumbing, heating and electrical facilities. Space chosen by the Contractor for the DDC Field Office must be approved by the Commissioner before the area is rented. All insurance, maintenance and equipment, including computer workstations specified in Sub-Section 3.8 D in quantities required as specified in Sub-Section 3.8 B 3 for the DDC Field Office trailer, shall also apply to rented spaces.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.8 D

- D. ADDITIONAL EQUIPMENT FOR THE DDC FIELD OFFICE:
1. The Contractor shall provide a high volume copy machine (50 copies per minute) for paper sizes 8½ x 11, 8½ x 14 & 11 x 17. Copier shall remain at job site until the DDC Field office trailer is removed from the site.



2. The Contractor shall furnish a fax machine and a telephone answering machine at commencement of the project for the exclusive use of the DDC Field Office. All materials shall be new, sealed in manufacturer's original packaging and shall have manufacturers' warranties. All items shall remain the property of the City of New York at the completion of the project.
3. **COMPUTER WORKSTATION:** The Contractor shall provide a complete computer workstation as specified herein:
 - a. **Hardware/Software Specification:**
 - 1) **Computer Equipment -** Computers shall be provided for all contracts that have a Total Consecutive Calendar Days for construction duration as set forth in Schedule "A" of 180 CCD's or greater. Contracts of lesser duration shall not require computers.
 - 2) Computers furnished by the Contractor for use by City Personnel, for the duration of the contract, shall be in accordance with Specific Requirements, contained herein, shall remain the property of the City of New York at the completion of the project and shall meet the following minimum requirements:
 - 3) **Personal Computer(s) – Each Workstation Configuration.**
 - a) **Make and Model:** Dell; HP; Gateway; Acer; or, an approved equivalent. (Note: an approved equivalent requires written approval of the Assistant Commissioner of ITS.)
 - b) **Processor:** i5-2400 (6MB Cache, 3.1GHz) or faster computer - Single Processor.
 - c) **System RAM:** Minimum of 4GB (Gigabytes) Dual Channel DDR3 SDRAM at 1333MHz – 2 DIMMSs
 - d) **Hard Disk Drive(s):** 500 GB (Gigabytes) Serial ATA (7200RPM) w/DataBurst Cache, or larger.
 - e) **CD-RW:** Internal CD-RW, 48x Speed or faster.
 - f) **16xDVD+/-RW** DVD Burner (with double layer write capability) 16x Speed or faster
 - g) **I/O Ports:** Must have at least one (1) Serial Port, one (1) Parallel Port, and three (3) USB Ports.
 - h) **Video Display Card:** HD Graphics (VGA, HDMI) with a minimum of 64 MB of RAM.
 - i) **Monitor:** 22" W, 23.0 Inch VIS, Widescreen, VGA/DVI LCD Monitor.
 - j) **Available Exp. Slots:** System as configured above shall have at least two (2) full size PCI Slots available.
 - k) **Network Interface:** Integrated 10/100/1000 Ethernet card.
 - l) **Other Peripherals:** Optical scroll Mouse, 101 Key Keyboard, Mouse Pad and all necessary cables.
 - m) **Software Requirement:** Microsoft Windows 7 Professional SP1, 32 bit; Microsoft Office Professional 2010 or 2013; Microsoft Project 2010; Adobe Acrobat reader; Anti-Virus software package with 2 year updates subscription; and, either Auto Cad LT or Microsoft



Visio Standard Edition, as directed by the Resident Engineer.

- 4) DDC Field Office Specs: DDC Field Offices requiring computers shall be provided with the following:
 - a) One (1) broad-band internet service account. Wideband Internet connectivity at a minimum throughput of 15 Mbps download and 5 Mbps upload is required at each field office location with 1-5 staffers. For larger field offices see table below for minimum required upload speeds. Telephone service should be bundled together with Internet connectivity. Because of throughput requirements Verizon FIOS is the preferred connectivity provider where available.

Office Personnel #	Upload Speeds (Minimum)
1 – 5	5 Mbps
6 – 10	10 Mbps
11 – 15	15 Mbps
16 – 20 ...	20 Mbps

This account will be active for the life of the project. The e-mail name for the account shall be the DDC Field Office/project Id (e.g. FLD K HWK666 McGuinness@earthlink.com).

- b) One (1) 600 DPI HP Laser Jet Printer (twelve (12) pages per minute or faster) with one (1) Extra Paper (Legal Size)
 - c) All necessary cabling for equipment specified herein.
 - d) Storage Boxes for Blank CD's
 - e) Printer Table
 - f) UPS/Surge Suppressor combo
- 5) All computers required for use in the Engineer's Field Office shall be delivered, installed, and setup in the Field Office by the Contractor.
- 6) All Computer Hardware shall come with a three (3) year warranty for on-site repair or replacement. Additionally, and notwithstanding any terms of the warranty to the contrary, the Contractor is responsible for rectifying all computer problems or equipment failures within one (1) business day.
- 7) An adequate supply of blank CDs/DVDs, and paper and toner cartridges for the printer shall be provided by the Contractor, and shall be replenished by the Contractor as required by the Resident Engineer.
- 8) It is the Contractor's responsibility to ensure that electrical service and phone connections are also available at all times; that is, the Field Office Computer(s) is to be powered and turned on twenty-four (24) hours each day.
- 9) Broadband connectivity is preferred at each field office location. Please take into consideration that an extra phone line dedicated to the modem must be ordered as part of the contract unless Internet broadband connectivity, via Cable or DSL, is available at the planned field office location. Any questions regarding this policy should be directed to the Assistant Commissioner of Information Technology Services at 718-391-1761.
- 10) Ownership: The equipment specified above shall, unless otherwise directed by the Commissioner, be the sole property of the City of New York upon delivery to the DDC Field Office. The Contractor shall prepare and maintain an accurate inventory of all equipment which it purchases for the DDC Field Office. Such inventory shall be provided to the City of New York. Upon completion of the



required services, as directed by the Commissioner, the Contractor shall turn such equipment over to the City of New York.

E. HEAD PROTECTION (HARD HATS):

1. The Contractor shall provide a minimum of 10 standard protective helmets for the exclusive use of Department of Design and Construction personnel and their visitors. Helmets shall be turned over to the Resident Engineer and kept in the DDC Field Office.
2. Upon completion of the project, the helmets shall become the property of the Contractor.

3.9 MATERIAL SHEDS:

- A. Material sheds used by the Contractor for the storage of its materials shall be kept at locations which will not interfere at any time with the progress of any part of the work or with visibility of traffic control devices.
- B. Store combustible materials apart from the facility.

3.10 TEMPORARY ENCLOSURES:

- A. Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weather tight enclosure for building exterior.
- B. Where heating or cooling is needed and permanent enclosure is not complete, insulate temporary enclosures.

3.11 TEMPORARY PARTITIONS:

- A. Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate occupied tenant areas from fumes and noise.
 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant plywood on construction operations side.
 2. Construct dustproof partitions with 2 layers of 3-mil (0.07-mm) polyethylene sheet on each side. Cover floor with 2 layers of 3-mil (0.07-mm) polyethylene sheet, extending sheets 18 inches (460 mm) up the sidewalls. Overlap and tape full length of joints. Cover floor with fire-retardant plywood.
 - a. Construct vestibule and airlock at each entrance through temporary partition with not less than 48 inches (1219 mm) between doors. Maintain water-dampened foot mats in vestibule.
 3. Insulate partitions to provide noise protection to occupied areas.
 4. Seal joints and perimeter. Equip partitions with dustproof doors and security locks.
 5. Protect air-handling equipment.
 6. Weather strip openings.
 7. Provide walk-off mats at each entrance through temporary partition.

3.12 TEMPORARY FIRE PROTECTION:

- A. Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241.
- B. Prohibit smoking in all areas.
- C. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.



- D. Develop and supervise an overall fire-prevention and protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- E. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 WORK FENCE ENCLOSURE:

- A. The Contractor shall furnish, erect and maintain a wood construction or chain-link fence to the extent shown on the drawings or required by the work enclosing the entire project on all sides. All materials used shall be new. Any permit required for the installation and use of said fence and costs shall be borne by the Contractor.
- B. WOOD FENCE shall be 7'-0" high with framing construction of yellow pine, using 4" x 4" approved preservative-treated posts on not more than 6'-0" centers, with three (3) rails of at least 2" x 4" size to which shall be secured minimum 1/2 inch thick exterior grade plywood. Posts shall be firmly fixed in the ground at least 30" and thoroughly braced. Top edge of fence shall be trimmed with a rabbeted edge mould. Provide on the street traffic sides of fence, observation openings as directed.
 - 1. GATES - Provide an adequate number of double gates, complete with hardware, located as approved by the Resident Engineer. Double gates shall have a total clear opening of 14'-0" with two (2) 7'-0" hinged swinging sections. Hanging posts shall be 6" x 6" and shall extend high enough to receive and be provided with tension or sag rods for the swinging sections.
 - 2. PAINTING - The fence and gates shall be entirely painted on the street and public sides with one (1) coat of exterior primer and one (1) top coat of exterior grade acrylic-latex emulsion paint. Black stenciled signs reading "POST NO BILLS" shall be painted on fence with three (3) inch high letters on 25 foot spacing for the entire length of fence on street traffic sides. Signs shall be stenciled five (5) feet above the sidewalk.
- C. CHAIN-LINK FENCING shall be minimum 2-inch thick, galvanized steel, chain-link fabric fencing; 8 feet high with galvanized steel pipe posts; minimum 2-3/8-inch OD line posts and 2-7/8-inch OD corner and pull posts, with 1-5/8-inch OD top and bottom rails. Fence shall be accurately aligned and plumb, adequately braced and complete with gates, locks and hardware as required. Under no condition shall fencing be attached or anchored to existing construction or trees.
- D.
 - 1. It shall be the obligation of the Contractor to remove all posters, advertising signs, and markings, etc., immediately.
 - 2. Should the fencing be required to be relocated during the course of the Contract, it shall be done by the Contractor at no additional cost to the City.
 - 3. Where sidewalks are used for "drive over" purposes for Contractor vehicles, a suitable wood mat or pad shall be provided for protection of sidewalks and curbs.
 - 4. Where required, make provision for fire hydrants, lampposts, etc.
 - 5. REMOVAL - When directed by the Resident Engineer, the fence shall be removed.

3.14 RODENT AND INSECT CONTROL:

- A. DESCRIPTION: The Contractor shall provide all labor, materials, plant and equipment, and incidentals required to survey and monitor rodent activity and to control any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. Special attention should be paid to the following conditions or areas:



1. Wet areas within the project area, including all temporary structures.
 2. All exterior and interior temporary toilet structures within the project area.
 3. All Field Offices and shanties within the project area of all subcontractors and DDC.
 4. Wherever there is evidence of food waste and/or discarded food or drink containers, in quantity, that would cause breeding of rodents or the insects herein specified.
 5. Any other portion of the premises requiring such special attention.
- B. MATERIALS:
1. All materials shall be approved by the New York State Department of Environmental Conservation and comply with the New York City Health Code, OSHA and the laws, ordinances and regulations of State and Federal agencies pertaining to such chemical and/or materials.
- C. PERSONNEL:
1. All pest control personnel must be supervised by an exterminator licensed in categories 7A and 8.
- D. METHODS:
1. Application and dosage of all materials shall be done in strict compliance with the manufacturer's recommendations.
 2. Any unsanitary conditions, such as uncollected garbage or debris, resulting from all Contractor's activities, which will provide food and shelter to the resident rodent population shall be corrected by the Contractor immediately after notification of such condition by the Resident Engineer.
- E. RODENT CONTROL WORK:
1. In wetlands, woodlands and areas adjacent to a stream, special precautions must be taken to protect water quality and to ensure the safety of other wildlife. To prevent poisoned bait from entering streams, no poisoned bait shall be used in areas within seventy-five (75) feet of all stream banks. Live traps must be used in these seventy-five (75) foot buffer zone areas and within wetland and woodland areas.
 2. In areas outside the seventy-five (75) foot zone of protection adjacent to streams, and in areas outside wetlands and woodlands, tamper proof bait stations with poisoned bait shall be placed during the period of construction and any consumed or decomposed bait shall be replenished as directed.
 3. At least one month prior to initiation of the construction work, and periodically thereafter, live traps and/or rodenticide bait in tamper proof bait stations, as directed above, shall be placed at locations that are inaccessible to pets, human beings, children and other non-target species, particularly wildlife (for example-birds) in the project area.
 4. The Contractor shall be responsible for collecting and disposing of all trapped and poisoned rodents found in live traps and tamper proof bait stations. The Contractor shall also be responsible for posting and maintaining signs announcing the baiting of each particular location.
The Contractor shall be responsible for the immediate collection and disposal of any visible rodent remains found on streets or sidewalks within the project area.
 5. It is anticipated that public complaints will be addressed to the Commissioner. The Contractor, where directed by the Commissioner, shall take appropriate actions, like baiting, trapping, proofing, etc., to remedy the source of complaint within the next six (6) hours of normal working time which is defined herein for the purposes of this section as 7 A.M. to 6 P.M. on Mondays through Saturdays.
 6. Emergency service during the regular workday hours (Monday through Friday) shall be rendered within 24 hours, if requested by the Commissioner, at no additional cost to the City.



F. EDUCATION & NOTICES:

1. The Contractor shall post notices on all Construction Bulletin Boards advising workers, employees, and residents to call the Engineer's Field Office to report any infestation or outbreak of rodents, rats, mice, water beetles, roaches and fleas within the project area. The Contractor shall provide and distribute literature pertaining to IPM techniques of rodent control to affected businesses and superintendents of nearby residential buildings to ensure their participation in maintaining their establishments free of unsanitary conditions, harborage removal and rodent proofing.
2. Prior to application of any chemicals, the Contractor shall furnish to the Commissioner copies or sample labels for each pesticide, antidote information, and Material Data Safety Sheets (MSDS) for each chemical used.

G. RECORDS

1. The Contractor shall keep a record of all rodent and waterbug infestation surveys conducted by him/her and make available, upon request, to the Commissioner. The findings of each survey shall include, but not be limited to, recommended Integrated Pest Management (IPM) techniques, like baiting, trapping, proofing, etc., proposed for rodent and waterbug pest control.
2. The Contractor shall maintain records of all locations baited along with the type and quantity of rodenticide and insecticide bait used.

3.15 PLANT PEST CONTROL REQUIREMENTS and TREE PROTECTION REQUIREMENTS:

A. Plant Pest Control Requirements: The Contractor and its subcontractors, including the Certified Arborist described below, shall comply with all Federal and New York State laws and regulations concerning Asian Longhorned Beetle (ALB) management, including protocols for ALB eradication and containment promulgated by the New York State Department of Agriculture and Markets (NYSDAM). The Contractor is referred to: (1) Part 139 of Title 1 NYCRR, Agriculture and Markets Law, Sections 18, 164 and 167, as amended, and (2) State Administrative Procedure Act, Section 202, as amended.

1. All tree work performed within the quarantine areas must be performed by New York State Department of Agriculture and Markets (NYSDAM) certified entities. Transportation of all host material, living, dead, cut or fallen, inclusive of nursery stock, logs, green lumber, stumps, roots, branches and debris of a half inch or more in diameter from the quarantine areas is prohibited unless the Contractor or its sub-contractor performing tree work has entered into a compliance agreement with NYSDAM. The terms of said compliance agreement shall be strictly complied with. Any host material so removed shall be delivered to a facility approved by NYSDAM. For the purpose of this contract host material shall be ALL species of trees.
2. Any host material that is infested with the Asian Longhorned Beetle must be immediately reported to NYSDAM for inspection and subsequent removal by either State or City contracts, at no cost to the Contractor.
3. Prior to commencement of tree work, the Contractor shall submit to the Commissioner a copy of a valid Asian Longhorned Beetle compliance agreement entered into with NYSDAM and the Contractor or its sub-contractor performing tree work. If any host material is transported from the quarantine area the Contractor shall immediately provide the Commissioner with a copy of the New York State 'Statement of Origin and Disposition' and a copy of the receipt issued by the NYSDAM approved facility to which the host materials are transported.
4. Quarantine areas, for the purpose of this contract shall be defined as all five boroughs of the City of New York. In addition, prior to the start of any tree work, the Contractor shall contact the



NYC Department of Parks & Recreation's Director of Landscape Management at (718) 699-6724, to determine the limits of any additional quarantine areas that may be in effect at the time when tree work is to be performed. The quarantine area may be expanded by Federal and State authorities at any time and the Contractor is required to abide by any revisions to the quarantine legislation while working on this contract. For further information please contact: NYSDAM (631) 288-1751.

- B. Tree Protection Requirements: The Contractor shall retain a Certified Arborist, as defined by New York City Department of Parks and Recreation (NYCDPR) regulations, to provide the services described below.
1. Surveys and Reports: The Certified Arborist shall, at the times indicated below, conduct a survey and prepare a plant material assessment report which includes: (1) identification, by species and pertinent measurements, of all plant material located on the project site, or in proximity to the project site, as described below, including all trees, significant shrubs and/or planting masses; (2) identification and plan for the containment of plant pests and pathogens, including the ALB, as described in paragraph A above; (3) evaluation of the general health and condition of any infected plant material.
 2. Frequency of Reports: The Certified Arborist shall conduct a survey and provide a plant material assessment report at two (2) points in time: (1) prior to the commencement of construction work; and (2) at the time of substantial completion. In addition, for projects exceeding 24 months in duration, the Certified Arborist shall conduct a survey and prepare a report at the midpoint of construction. Copies of each plant material assessment report shall be submitted to the Resident Engineer within two (2) weeks of the survey.
 3. Proximity to Project Site: Off-site trees, significant shrubs and/or planting masses shall be considered to be located in proximity to the project site under the circumstances described below.
 - a. The tree trunk, significant shrub, or primary cluster of stems in a planting mass is within 50 (fifty) feet of the project's Contract Limit Lines (CLLs) or Property Lines (PLs).
 - b. Any part of the tree or shrub stands within 50 (fifty) feet of: (a) a path for site access for vehicles and/or construction equipment; or (b) scaffolding to be erected for construction activity, including façade remediation projects.
 - c. The Certified Arborist determines that the critical root zone (CRZ) of an off-site tree, significant shrub, or primary cluster of stems in a planting mass extends into the project site, whether or not that plant material is located within the 50-foot inclusionary perimeter as outlined above.
 4. Tree Protection Plan: The Certified Arborist shall prepare, and the Contractor shall implement, a Tree Protection Plan, for all trees that may be affected by any construction work, excavation or demolition activities, including without limitation, (1) on-site trees, (2) street trees, as defined below, (3) trees under NYCDPR jurisdiction as determined by the Department of Transportation, and (4) all trees that are located in proximity to the project site, as defined above. The Tree Protection Plan shall comply with the NYC DPR rules, regulations and specifications. The Contractor is referred to Chapter 5 of Title 56 of the Official Compilation of the Rules of the City of New York. Copies of the Tree Protection Plan shall be submitted to the Resident Engineer prior to the commencement of construction. Implementation of the Tree Protection Plan for street trees and trees under NYCDPR jurisdiction shall be in addition to any tree protection requirements specified or required for the project site. For the purpose of this article, a "street tree" means the following: (1) a tree that stands in a sidewalk, whether paved or unpaved, between the curb lines or lateral lines of a roadway and the adjacent property lines



of the project site, or (2) a tree that stands in a sidewalk and is located within 50 feet of the intersection of the project's site's property line with the street frontage property line.

- C. No Separate Payment. No separate payment shall be made for compliance with Plant Pest Control Requirements or Tree Protection Requirements. The cost of compliance with Plant Pest Control Requirements and Tree Protection Requirements shall be deemed included in the Contractor's bid for the Project.

3.16 PROJECT IDENTIFICATION SIGNAGE:

- A. The Contractor shall provide, install and maintain Project identification and other signs where indicated to inform public and individuals seeking entrance to the Project.
- B. In order to properly convey notice to persons entering upon a City construction site, the Contractor shall furnish and install a sign at the entrance (gates) as follows:

NO TRESPASSING

AUTHORIZED PERSONNEL ONLY

- C. If no construction fence exists at the site, this notice shall be conveyed by incorporating the above language into safety materials (barriers, tape, and signs).
- D. Provide temporary, directional signs for construction personnel and visitors.
- E. Maintain and touch up signs so that they are legible at all times.

3.17 PROJECT CONSTRUCTION SIGN AND RENDERING:

- A. PROJECT SIGN:
- 1 Responsibility: The Contractor shall produce and install one (1) project sign which shall be posted and maintained upon the site of the project at a place and in a position directed by the Commissioner. The Contractor shall protect the sign from damage during the continuance of work under the Contract and shall do all patching of lettering, painting and bracing thereof necessary to maintain the sign in first class condition and in proper position. Prior to fabrication, the Contractor shall submit an 8-1/2" x 11" color match print proof from the sign manufacturer of the completed sign for approval by the Commissioner.
 - 2 Sign Quality: The Contractor shall provide all materials required for the production of the sign as specified herein. Workmanship shall be of the best quality, free from defects and shall be produced in a timely manner.
 - 3 Schedule: Upon project mobilization, the Contractor shall commence production and installation of the sign.
 - 4 Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project sign away from the site.
 - 5 Sign construction:
 - a. Frame: The frame shall be from quality dressed 2"x2" pine, fire retardant, pressure treated lumber, that surrounds the inside back edge of the sign. The sign shall have one (1) intermediate vertical and two (2) diagonal supports, glued and screwed for rigidity. Frame shall be painted white with two (2) coats of exterior enamel paint, prior to mounting of sign panel.
 - b. Edging: U-shaped, 22 gauge aluminum edging, with a white enameled finish to match sign



- background, shall run around entire edging of sign panel and frame. Corners shall be mitered for a tight fit. Channel dimensions shall be 1" inch (overlap to sign panel face) x 1 3/4" (or as required across frame depth) x 1" (back overlap).
- c. Sign Panel: 4' x 8' panel shall be constructed in one (1) piece of 14 gauge (.0785") 6061-T6 aluminum. This panel shall be pre-finished both sides with a glossy white baked-on enamel finish and be flush with edge of 2" x 2" wood frame. Samples must be submitted for approval.
 - d. Fastening: Fasten sign panel to wood frame using cadmium plated no. 8 sheet metal screws at 1/2" below edge of panel and 8" on center. The U-shaped aluminum channel shall be applied over the wood frame edge and fastened with cadmium plated no. 8 sheet metal screws at 12" on center around the entire perimeter.
- 6 Sign Graphics:
- a. A digital file of the project sign will be provided to the Contractor by the Commissioner's representative for printing. The Commissioner's representative shall insert the project name and names and titles of personnel (3 or more) and any other required information associated with the project. All signs may include a second panel for a project rendering as described in Sub-Section 3.17.B herein.
 - b. The digital file shall be reproduced at the Sign Panel size of 4' x 8' on 3M High Performance Vinyl or approved equal. The 3M High Performance Vinyl or equivalent shall be guaranteed for nine (9) years. Guarantee must cover fading, peeling, chipping or cracking. The sign manufacturer is required to maintain all specified Pantone Matching System (PMS) type and other composition elements represented in the digital file of the project sign.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.17 B

B. PROJECT RENDERING:

1. Responsibility: In addition to the Project Sign, the Contractor shall furnish and install one (1) sign showing a rendering of the project. A digital file of the project rendering will be provided to the Contractor by the Commissioner's representative. From an approved image file provided by DDC, the Project Rendering is to be sized, printed, and mounted in an identical manner as described in Sub-Section 3.17.A above for the Project Sign. A color match print proof from the sign manufacturer of the Rendering Sign printed from the supplied file is to be submitted to DDC for approval before fabrication. The Rendering Sign is to be posted at the same height as the Project Sign. Where possible, the Rendering Sign shall be mounted with a perfect match of the short sides of the rectangle so that the Rendering Sign and the Project Sign together will create one long rectangle.
2. Removal: At the completion of all work under the Contract, the Contractor shall remove and dispose of the project rendering away from the site.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.18

3.18 SECURITY GUARDS/FIRE GUARDS ON SITE:

A. SECURITY GUARDS (WATCHMEN):

1. The Contractor shall provide competent Security Guard Service on the site, beginning on the date on which the Contractor commences actual construction work, or on such earlier date on which there is activity at the site related to the work, including without limitation, delivery of



materials or construction set-up. The Contractor shall continue to provide such Security Guard Service until the date on which it completes all required work at the site, including all punch list work, as certified in writing by the Resident Engineer, or earlier if so directed in writing by the Commissioner. Throughout the specified time period, there shall be no less than one (1) Security Guard on duty every day, including Saturdays, Sunday and Holidays, 24 hours a day, except between the hours of 8:00 A.M. and 4:00 P.M. on any day which is a regular working day for a majority of the trade subcontractors. This exception during the working day shall not apply after the finishing painting of the plaster work is commenced; thereafter, not less than one (1) Security Guard shall be on duty continuously, 24 hours a day.

2. Every Security Guard shall be required to hold a "Certificate of Fitness" issued by the Fire Department. Every Security Guard shall, during his/her tour of duty, perform the duties of Fire Guard in addition to his/her security obligations.
 3. Should the Commissioner find that any Security Guard is unsatisfactory; such guard shall be replaced by the Contractor upon the written demand of the Commissioner.
 4. Each Security Guard furnished by the Contractor shall be instructed by the Contractor to include in his/her duties the entire construction site including the Field Office, temporary structures, and equipment, materials, etc.
 5. Should the Contractor or any other subcontractor consider the security requirements outlined above inadequate, the Contractor shall provide such additional security as it thinks necessary, after obtaining the written consent of the Commissioner. The additional cost of such approved increased protection will be paid by the Contractor.
 6. Nothing contained in this Sub-Section shall diminish in any way the responsibility of the Contractor and each subcontractor for its own work, materials, tools, equipment, nor for any of the other risks and obligations outlined hereinbefore in this Article.
- B. COSTS - The Contractor shall employ Security Guards/Fire Guards throughout the specified time period, except as otherwise modified by the detailed Specifications and as approved by the Commissioner, for the purpose of safeguarding and protecting the site. All costs for Security Guards/Fire Guards shall be borne by the Contractor.
- C. RESPONSIBILITY - The Contractor and its subcontractors will be responsible for safeguarding and protecting their own work, materials, tools and equipment.

3.19 SAFETY:

- A. The Contractor, in compliance with requirements of Section 01 35 26, SAFETY REQUIREMENTS PROCEDURES, shall provide and maintain all necessary temporary closures, guard rails, and barricades to adequately protect all workers and the public from possible injury. Any removal of these items, during the progress of the work, shall be replaced by the Contractor at no additional cost to the City.

END OF SECTION 01 50 00



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

SECTION 01 54 11
TEMPORARY ELEVATORS AND HOISTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes the following:
1. Temporary Use, Operation and Maintenance of Elevators during Construction
 - a. For New Buildings up to 15 Stories
 - b. For New Buildings over 15 Stories
 - c. For Existing Buildings
 2. Temporary Construction Hoists and Hoist ways (For Material and Personnel)

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
B. Section 01 42 00 REFERENCES
C. Section 01 50 00 TEMPORARY FACILITIES AND CONTROLS
D. Section 01 54 23 TEMPORARY SCAFFOLDS AND SWING STAGING
E. Section 01 77 00 CLOSE OUT PROCEDURES

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.1

3.1 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDINGS UP TO AND INCLUDING 15 STORIES:

- A. **INSTALLATION:** The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, one (1) selected main elevator for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevator in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevator and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.
- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.



- C. **COSTS:** The Contractor shall be responsible for all costs in connection with the temporary elevator, including without limitation: (1) installing and operating the temporary elevator, (2) maintaining the temporary elevator in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevator, (4) replacing the temporary elevator or any equipment or parts utilized in connection therewith, if required, due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevator, (6) providing all electric power required to operate the temporary elevator, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevator, and (8) providing all labor for the operation and maintenance of the temporary elevator, including on an overtime basis if necessary. The total Contract Price shall include all costs in connection with the temporary elevator, including without limitation, the costs specified herein.
- D. **COMMENCEMENT OF SERVICE:** The Contractor shall begin to provide temporary elevator service using the selected main passenger elevator no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or a temporary enclosure meeting the requirements of the law.
 2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks and any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room roof slab or that portion of its surrounding the elevator has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the machine room to the low voltage transformers and car light outlets in the center of shaft way and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.
- F. **REMOVAL:** When elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment and promptly proceed with the installation of the permanent equipment as required under the Contract.
- G. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection deems it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables and new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.



- H. REPLACEMENT: The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned. Where lubricated rails are used they shall be washed down. If roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- I. LIMITATIONS ON USE: The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- J. LIQUIDATED DAMAGES: The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this section beginning with the 41st working day after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2

3.2 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR NEW BUILDING OVER 15 STORIES:

- A. INSTALLATION: The Contractor shall install, complete, operate, and maintain in good working order, as indicated herein, two (2) selected main elevators for the transport of employees of the Contractor and/or its subcontractors, and representatives of the DDC and other Governmental Agencies having jurisdiction of work at the project. The Contractor shall furnish, install, and maintain such elevators in good working order, including all necessary hoisting ropes, governor cables, traveling conductor cables, operating devices, temporary hand reset target annunciators, temporary signal devices, and all other permanent or temporary parts. The installation, operation and maintenance of the temporary elevators and all equipment and/or parts utilized in connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use. The two (2) elevators shall not be operated simultaneously.
- B. RESPONSIBILITY: The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevators and all equipment and/or parts utilized in connection therewith.
- C. COSTS: The Contractor shall be responsible for all costs in connection with the temporary elevators, including without limitation: (1) installing and operating the temporary elevators, (2) maintaining the temporary elevators in clean, proper operating condition, including the cost of lubricants and/or parts for such maintenance, (3) performing all work in pits, shaft ways and machine rooms necessary for the operation of the temporary elevators, (4) replacing the temporary elevators or any equipment or parts utilized in connection therewith, if required due to damage, destruction or excessive wear or corrosion, except for the replacement of hoisting ropes as set forth below, (5) performing all required electrical work in connection with the temporary elevators, (6) providing all electric power required to operate the temporary elevators, (7) providing all necessary conduit and wiring connections for the proper operation and signaling of the temporary elevators, and (8) providing all labor for the operation and maintenance of the temporary elevators, including on an overtime basis if necessary. The total Contract Price shall



include all costs in connection with the temporary elevators, including without limitation, the costs specified herein.

- D. **LOW RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service using one (1) selected main passenger elevator no later than six (6) weeks (30 working days) after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped. No later than one (1) week, five (5) working days, after the 12th Floor slab, or that portion of it surrounding the elevator shaft, has been placed and stripped the following work shall have been completed:
1. The shaft shall have been completely enclosed up to the 12th Floor by either the permanent or a temporary enclosure meeting the requirements of the law.
 2. A temporary machine room enclosure shall have been provided at the 11th Floor and shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary, shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors up to and including the 9th Floor at the shaft entrances to the elevator, solid substantial wood frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- E. **ELECTRICAL INSTALLATION:** The Contractor not later than 10 calendar days after the 12th Floor slab or that portion of it surrounding the elevator, has been poured and stripped, shall have furnished and installed temporary or permanent power and light feeders as required for the elevator used for temporary service and shall have connected such feeders to the terminals on the starter panels or controllers in the temporary machine room, to the low voltage transformers and car light outlets in the center of the shaftway and for the car control and signal traveling cables. The Contractor shall make all these required connections as soon as the Equipment is declared ready for such connections by the Resident Engineer.
- F. **HIGH RISE ELEVATOR:** The Contractor shall begin to provide temporary elevator service to all floors, using a selected main passenger elevator, no later than eight (8) weeks (40 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed. No later than three (3) weeks (15 working days) after the machine room roof slab, or that portion of it surrounding the elevator shaft, has been placed, the following work shall have been completed:
1. The shaft shall have been completely enclosed by either the permanent or temporary enclosure, meeting the requirements of the law.
 2. The machine room shall have been made completely watertight either by permanent or temporary construction. Beams or other devices, either permanent or temporary shall be provided which will enable the safe and practicable hoisting of the elevator machinery for installation.
 3. There shall have been installed on all floors at the shaft way entrances to the elevator, solid substantial frames and either sliding or swing doors with substantial hardware and door locks, also any necessary approved wire mesh barricades for adjacent shaft ways.
 4. There shall have been furnished and installed, solid substantial enclosures at front, back, sides and top of car platform enclosure, with an emergency exit at top of car, excepting that the portion of the front at the elevator entrance shall have been provided with a substantial temporary door or gate.
- G. **ELECTRICAL INSTALLATION:** The Contractor, not later than 20 calendar days after the machine room slab or that portion of it surrounding the elevator shaft has been placed, shall have furnished and installed temporary or permanent power and light feeders as required for the high rise elevator to be used for

temporary service and shall have connected such feeders to the terminals on the motor-generator starter panels or controllers in the machine room, to the signal circuits low voltage transformers for the annunciators and car light outlets in the center of shaft way. The Contractor shall make all these required connections as soon as the equipment is declared ready for such connections by the Resident Engineer.

- H. When the high rise elevator is completed and ready for temporary operation, the low rise temporary elevator shall be shut down.
- I. **REMOVAL:** When one (1) or more elevators for permanent use have been installed and are in condition for service, and when directed by the Commissioner, the Contractor shall remove the temporary enclosures and all temporary elevator equipment, and promptly proceed with the installation of the permanent equipment as required under the Contract.
- J. **INSPECTION:** Before temporary elevator equipment is removed, a joint inspection of the equipment shall be made by the Contractor and the Commissioner to determine the condition of this equipment upon the discontinuation of its temporary use. If this inspection determines it necessary, the Contractor shall furnish and install new governor and compensating ropes, new traveling cables, new controller parts, etc. The car and counterweight safeties shall be thoroughly cleaned of all dirt and all foreign matter, then properly lubricated and placed in good operating condition to the satisfaction of the Commissioner. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- K. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the temporary elevator installations that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheaves spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be removed from the rails. The full cost of parts replacement cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes.
- L. **LIMITATIONS ON USE:** The temporary elevators shall not be used during their operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation, but only after such times as all plastering has been completed from the second floor up. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- M. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide the temporary elevator service described in this Section beginning with the 31st working day after the 12th Floor slab, or that portion of the 12th Floor slab surrounding the elevator shaft, has been placed and stripped. This charge will be deducted from any amount due and owing to the Contractor.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 TEMPORARY USE, OPERATION AND MAINTENANCE OF ELEVATORS DURING CONSTRUCTION FOR EXISTING BUILDINGS:

- A. The Contractor may use, at the Commissioner's discretion, one (1) selected elevator in the building for temporary operation by the Contractor for the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction over the work at the Project. The operation of the temporary elevator and all equipment and/or parts utilized in

connection therewith shall be in accordance with the rules and regulations of all agencies and/or entities having jurisdiction over elevators in temporary use.

- B. **RESPONSIBILITY:** The Contractor shall be responsible for any injury to persons or damage to property arising out of the temporary elevator and all equipment and/or parts utilized in connection therewith.
- C. **REPLACEMENT:** The Contractor shall furnish and install new equipment or parts for any equipment or parts of the elevator for temporary operation that have been damaged, destroyed, or that indicate excessive wear or corrosion, excepting the replacement of hoisting ropes. All shaft ways, pits, motor rooms and sheave spaces used for temporary operation of elevators shall be thoroughly cleaned down. Where lubricated rails are used they shall be washed down, if roller guides are used, all rust, dirt, etc., must be moved from the rails. The full cost of parts replacement, cleaning, etc., shall be borne by the Contractor except for the replacement of hoisting ropes. If it is determined and ordered by the Commissioner that new hoist ropes are required, such ropes shall be installed and payment therefore will be made in accordance with Article 26 of the Contract.
- D. **LIMITATIONS ON USE:** The temporary elevator shall not be used during its operation for the hoisting of materials or the removal of rubbish, but shall be limited only to the transportation of employees of the Contractor and/or its subcontractors, and representatives of DDC and other Governmental Agencies having jurisdiction of work at the project. However, the Resident Engineer may grant special permission at specified times to the Contractor and/or its subcontractors to hoist materials, which in the Resident Engineer's opinion will not overload or damage the elevator installation. In the event of any damage to the temporary elevator, the Contractor shall notify the Resident Engineer within 24 hours after such damage has occurred. As indicated above, the Contractor shall be responsible for the replacement of any equipment or parts of the temporary elevator that have been damaged.
- E. **LIQUIDATED DAMAGES:** The Contractor will be charged at the rate of \$100 per day for each day it fails to provide elevator services described in this section beginning with 15 consecutive calendar days from Notice to Proceed. This charge will be deducted from any amount due and owing to the Contractor.

3.4 TEMPORARY HOISTS AND HOISTWAYS (FOR MATERIAL AND PERSONNEL):

- A. **RESPONSIBILITY:** The Contractor shall provide adequate numbers of material hoists for the most expeditious performance of all parts of the work including the work of all its subcontractors.
- B. **LOCATIONS:** No hoists shall be constructed at such locations as will interfere with, or affect the construction of, floor arches, or the work of subcontractors. The hoists may be located at the exterior sides of the structure or in the courtyard and extend upward adjacent to the line of window openings. The hoists shall be located a sufficient distance from the exterior walls and be so protected as to prevent any of the permanent work from being damaged, stained or marred.
- C. **ELEVATOR SHAFT:** Wherever possible, one or more of the permanent elevator shafts may be used as temporary hoist ways, providing such use complies with the requirements of the Building Code of the City of New York and has been approved by the Commissioner, and providing further it entails no interference with the progress of the work.
- D. **PROTECTION FOR INTERIOR HOISTS:** All interior material hoist ways shall be enclosed on each floor and shall be adequately protected with appropriate safety guards. In no event shall the protection be less than that required by law.

END OF SECTION 01 54 11



SECTION 01 54 23
TEMPORARY SCAFFOLDING AND PLATFORMS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. Section 01 35 26: Safety Requirements Procedures.
- C. The Contractor shall comply with the requirements of "*The City of New York Department of Design and Construction Safety Requirements*". This document is included in the Information for Bidders.

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Temporary Scaffolding and Platforms, including:
 - 1. Conformance
 - 2. Responsibility
 - 3. Jobsite Documentation and Submittals
 - 4. Inspections
- B. This Section governs ALL scaffold used on DDC project sites including, but not limited to, Suspended Scaffold, Supported Scaffold and Sidewalk Sheds.

1.3 CONFORMANCE:

- A. Unless otherwise indicated, the Contractor is responsible for providing, erecting, installing and maintaining all temporary scaffolding and platforms which shall comply with requirements of Chapter 33 (Safeguards During Construction or Demolition) of the NYC Building Code, NYC Local Law 52 of 2005, OSHA Construction Standard 1926 Subpart L, and furnishing the items and personnel set forth in this section.

1.4 RESPONSIBILITY:

- A. Jobsite Safety Coordinator: The Contractor shall designate and employ a Jobsite Safety Coordinator, who shall be a competent person, who shall have a daily presence on the project site during scaffold use. This designee must possess and maintain a valid New York City Department of Buildings supported scaffold certificate of completion. An alternate shall also be designated, in the event that the Jobsite Safety Coordinator is absent. The Jobsite Safety Coordinator shall:
 - 1. Verify completeness of documentation and submittals (as described below).
 - 2. Verify that inspections are performed, including pull tests (see below), reports are filed and reported deficiencies are corrected.
 - 3. Monitor trades using scaffold.
 - 4. Limit access to scaffold areas that are tagged for non-use.
 - 5. Inform trades of scaffold load limitations.
 - 6. Monitor loading of decks.
 - 7. Verify that any ties that are temporarily removed are properly restored in the same shift.
 - 8. Verify that outriggers and planks that are moved are properly set up and secured.
 - 9. Verify that all scaffold decks in use have proper access/egress.
 - 10. Verify that all open sides of decks in excess of 14 inches have proper guardrails and toe-boards.

11. Notify appropriate parties, including but not limited to the Resident Engineer, site safety coordinator / monitor, site safety consultant, scaffold users, contractor and the scaffold engineer, of misuses, non-conformances, hazards and accidents.
 12. Keep a log of significant actions and events connected with the scaffolding.
- B. The Contractor shall be responsible for erecting, maintaining and dismantling the scaffolding and/or sidewalk shed in conformance with requirements of the New York City Building Code, OSHA and the Contract documents, including the specifications. The Contractor shall also be guided by generally accepted standards of scaffold industry practice as promulgated by the Scaffold Industry Association.
- C. The Contractor shall require the subcontractor responsible for erecting the scaffolding to engage a Scaffold Engineer, licensed as a professional engineer by the State of New York. The Scaffold Engineer shall be responsible to ensure the following: (1) that the installation design is in compliance with requirements of the New York City Building Code and OSHA, (2) that the design comports with the capabilities of the components and the characteristics of the site, (3) that scaffold loads on the host building, including netting, have been properly considered, and (4) that the design documents provide accurate information for erectors and users.
- D. Scaffold users are trade contractors assigned to work on the scaffold. Training certificates from a New York City Department of Buildings approved training provider are mandatory. These users have the duty to become familiar with the New York City Building Code and OSHA requirements germane to users, to obey the instructions of the Jobsite Safety Coordinator and to inform the Jobsite Safety Coordinator of known hazards, non-conformances or violations.

1.5 JOBSITE DOCUMENTATION AND SUBMITTALS:

The Contractor shall prepare, obtain and submit the following to the Resident Engineer:

- A. NYC Department of Buildings permit(s) for scaffold and sidewalk sheds (as applicable) including filing applications signed and sealed by a Professional Engineer licensed in the State of New York;
- B. Site logistics plan / site safety plan;
- C. Installation drawing(s), design and product data to be provided for **all** scaffold(s) and shed(s) must include, at a minimum:
 1. Plan(s);
 2. Elevation(s);
 3. Duty load designation; "standard" (150 psf live load) or "heavy duty" (300 psf live load).
 4. Details including base support, anchors and ties;
 5. Notes and specifications including load limits, number of planked levels, tie spacing, netting, and sequence of installation and removal.
 6. Anchorage into sound material.
 7. Load limits based on pull tests;
 8. Specifications for pull test(s), method, proof load and the number of trials;
 9. Elevations, levels or heights, where anchorage is made into masonry;
 10. Specifications for frames, planks, screw jacks, anchors, and any other ancillary hardware;
 11. Samples for anchors, ties and netting;
 12. Sequence of operations for erection and demolition;
 13. Location plan, heights, widths, "jumps" over doorways and driveways;
 14. Specify size, maximum span and maximum spacing of headers and stringers;
 15. Specify legs, girts, braces, nailing and connections;
 16. All sidewalk sheds shall be designed, engineered, signed and sealed by a Professional Engineer licensed in the State of New York;
 - a. Generic (not job specific) engineering drawings are satisfactory for standard sheds and arrangements.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

- b. Special engineering is required for custom sheds, site-specific problems or non-standard arrangements.

1.6 INSPECTIONS:

- A. Signed inspection reports shall be issued for each inspection and pull-test below, and shall be logged and maintained on site by the Jobsite Safety Coordinator for the duration of the project.
- B. Pull testing shall be required during design, and during or post erection, where anchorage is made into masonry. The Scaffold Engineer shall specify the test method, proof load and the number of trials.
- C. Sidewalk sheds shall be inspected after initial installation, major modification, or damage and thence every three months. Inspections shall be by a Scaffold Engineer for custom sheds and by a Competent Person employed by the Contractor for standard sheds.
- D. Scaffolds shall be inspected by the Scaffold Engineer during erection, post-erection and prior to use and thence every three months. The Scaffold Engineer shall repeat inspections after major alteration/modification, damage.
- E. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling, and the condition and integrity of the sidewalk sheds after high winds, major storms and at least once per month during usage.
- F. A Qualified Person assigned by the Contractor shall inspect the progress of erection and dismantling at least weekly, and the condition and integrity of the scaffold after high winds, major storms and at least once per month during usage.
- G. Scaffolds and Sidewalk Sheds shall be inspected daily by the Jobsite Safety Coordinator or alternate prior to use by scaffold users. The inspection results must be recorded in the maintenance log, and be available on-site at all times.
- H. At the completion of the project, submit all inspection documents as Miscellaneous Record Documents in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.

1.7 LADDERS AND STAIRS:

- A. The Contractor shall provide and maintain ladders or temporary stairs extending from the street to the first story, and to and from every floor and roof level of the project.

1.8 ACCESS AND EXITS:

- A. The ladders or temporary stairs shall be of acceptable size, number and location, so that proper and convenient access may be had by those required to proceed to and from all parts of the project.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 54 23



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITION
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text



SECTION 01 73 00
EXECUTION

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes general procedural requirements governing execution of the Work including without limitation the following:
1. Delivery of Materials
 2. Contractor's Superintendent
 3. Surveys
 4. Borings
 5. Examination
 6. Environmental Assessment
 7. Preparation
 8. Deferred Construction
 9. Installation
 10. Permits
 11. Transportation
 12. Sleeves and Hangers
 13. Sleeve and Hanger Drawings
 14. Cutting and Patching
 15. Location of Partitions
 16. Furniture and Equipment
 17. Removal of Rubbish and Surplus Material
 18. Cleaning
 19. Security And Protection of Work Site
 20. Maintenance of Site and Adjoining Property
 21. Maintenance of Project Site
 22. Safety Precautions for Control Circuits
 23. Obstructions in Drainage Lines

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|------------------|--|
| A. | Section 01 10 00 | SUMMARY |
| B. | Section 01 31 00 | PROJECT MANAGEMENT AND COORDINATION |
| C. | Section 01 33 00 | SUBMITTAL PROCEDURES |
| D. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT & DISPOSAL |
| E. | Section 01 77 00 | CLOSEOUT PROCEDURES |
| F. | Section 01 78 39 | CONTRACT RECORD DOCUMENTS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 QUALITY ASSURANCE:

- A. Land Surveyor Qualifications: A professional land surveyor who is licensed in the State of New York and who is experienced in providing land-surveying services of the kind indicated.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 DELIVERY OF MATERIALS:

- A. Material Orders: The Contractor shall furnish to the Commissioner a copy of each material order indicating date of order and quantity of material, and shall also notify the Commissioner when materials have been delivered to the site and in what quantities.
- B. Ample Quantities: The Contractor shall deliver materials in ample quantities to insure the most prompt and uninterrupted progress of the work so as to complete the work within the Contract time.
- C. Containers: The manufacturer's containers shall be delivered with unbroken seals and shall bear proper labels.
- D. Deliveries: The Contractor shall coordinate deliveries in order to avoid delaying or impeding the progress of the work.
- E. Handling: The Contractor shall provide equipment and personnel to handle products by methods to prevent soiling or damage.
 - 1. Promptly inspect shipments to assure products comply with requirements, quantities are correct, and products are undamaged.
 - 2. Promptly return damaged shipments or incorrect orders to manufacturer.
 - 3. For materials or equipment to be reused or salvaged, use special care in removal, storage and reinstallation to insure proper function in completed work.
- F. Storage: Store products in accordance with provisions of Article 3.1, and periodically inspect to assure that stored products are undamaged and are maintained under required conditions.
- G. Stacking: All materials shall be properly stacked in convenient places adjacent to the site, or where directed, and protected in a satisfactory manner. Stacked materials shall be so arranged as to not interfere with visibility of traffic control devices.
- H. Overloading: If authority is given to store materials in any part of the project area, they shall be so stored as to cause no overloading.



- I. No Interference: If it becomes necessary to remove and restack materials to avoid impeding the progress of any part of the work or interfering with the work to be done by any trade subcontractor, the Contractor shall remove and restack such materials at no additional cost to the City.

3.2 CONTRACTOR'S CONSTRUCTION SUPERINTENDENT:

- A. Contractor's Construction Superintendent: The Contractor shall devote its time and personal attention to the work and shall employ and retain at the project site, from the commencement until the entire completion of the work, a Contractor's Construction Superintendent. The Contractor's Construction Superintendent shall be registered with the New York City Department of Buildings in compliance with the Construction Superintendent Rule of the City of New York and shall be competent and capable of maintaining proper supervision and care of the work and shall be acceptable to the Commissioner. The Construction Superintendent shall, in the absence of the Contractor, and irrespective of any superintendent or foreman employed by any subcontractor, shall see that the instructions of the Commissioner are carried out.
- B. Replacement: The Contractor's Construction Superintendent on the job shall not be changed or removed without the consent of the Commissioner.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.3

3.3 SURVEYS:

- A. Line and Grade: The City will establish a baseline and bench mark near the site of the work for use of the Contractor in connection with the performance of the work.
- B. Responsibility: The Contractor shall establish all other lines and elevations required for its work and shall be solely responsible for the accuracy thereof.
- C. Safeguard All Points: The Contractor shall safeguard all points, stakes, grade marks and bench marks made or established by the Contractor on the work, shall re-establish same if disturbed and bear the entire expense of rectifying the work improperly installed due to not maintaining, not protecting or removing without authorization such established points, stakes, or marks.
- D. City Monuments and Markers: No work shall be performed near City monuments or marks so as to disturb them until the said monuments or marks have been referenced or reset or otherwise disposed of by the relevant Agency or party who installed them.
- E. Foundations: The Contractor shall furnish certification from a licensed Surveyor that all portions of the foundation work are located in accordance with the Contract Drawings and at the elevations required thereby. This certification shall show the actual locations and the actual elevations of all the work in relation to the locations and elevations shown on the Contract Drawings, including but not restricted to the following:
 1. The locations and elevations of all piles, if any.
 2. Elevations of tops of all spread footings, tops of pile caps, and tops of all foundation walls, elevator pit walls and ramp walls.
 3. Location of all footing centers and pier centers including those for exterior wall columns.
 4. Location of all foundation walls including wall columns, elevator pit walls and ramp walls.
- F. Wall Lines: After the first courses of masonry or stone have been laid, the Contractor shall establish the permanent lines of exterior walls. The Contractor shall furnish promptly, certification from a licensed Surveyor, in the form of signed original drawings showing the exact location of such wall lines, of all portions of all structures. Except at its own risk, the Contractor shall not proceed further with the erection of walls until the Surveyor's certification has been submitted and verified for correct location of wall lines.



- G. Surveyor: The Surveyor selected for any of the purposes mentioned in Paragraph E and Paragraph F above, and Paragraph I below, shall be a land Surveyor licensed in the State of New York and shall be subject to the approval of the Commissioner. The Surveyor shall not be a regular employee of the Contractor, nor shall the Surveyor have any interest in the Contract. The Surveyor shall not be employed by the Contractor in laying out any work, it being intended that the Surveyor's certification shall represent an independent and disinterested verification of such layout. The Surveyor shall report to the Department of Design and Construction's Resident Engineer each time upon arrival to and departure from the site and review with the Resident Engineer the data required for the project.
- H. Final Certification: Final certification shall be submitted upon completion of the work or upon completion of any subdivision of the work as directed by the Commissioner. Any exceptions or deviations from the drawings shall be noted on the final certificate and there shall be included any maps, plates, notes, pertinent documents and data necessary, in the opinion of the Commissioner, to constitute a full and complete report.
- I. Final Survey: The Contractor shall submit to DDC for submission to the Department of Buildings a final Survey by the licensed Surveyor showing the location of the new Structure, before completion of the Structure. This Survey shall show the location of the first tier of beams or of the first floor; the finish grades of the open spaces on the plot; the established curb level and the location of all other Structures on the plan, together with the location and boundaries of the lot or plot upon which the Structure is constructed, curb cuts, all yard dimensions, etc.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.4

3.4 BORINGS:

- A. The work of this Sub-Section shall be the responsibility of the Contractor unless otherwise indicated.
- B. Reference Drawings: The Boring Drawings as listed on the title sheet are for information to the bidder and are to be used under the conditions as follows:
 - 1. Boring Logs: shown on the Boring Drawings, record information obtained under engineering supervision in the course of exploration carried out by or under the direction of forces of the Department of Design and Construction at the site.
 - 2. Soils and Rock Samples: All inferences are drawn from the indications observed as made by engineering and scientific personnel. All such inferences and all records of the work including soil samples and rock cores, if any, are available to bidders for inspection.
 - 3. Certification of Samples: The City certifies that the work was carried out as stated, and that the soil samples and rock cores, if any were referred to, were actually taken from the site at the times, places and in the manner indicated. The samples are available for inspection in the Department of Design and Construction Subsurface Exploration Section.
 - 4. Bidder's Responsibility: The bidder, however, is responsible for any conclusions to be drawn from the work. If the bidder accepts those of the City, it must do so at its own risk. If the bidder prefers not to assume such risk, the bidder is under the obligation of employing its own experts to analyze the available information, and must be responsible for any consequences of acting on their conclusions.
 - 5. Continuity Not Guarantee: The City does not guarantee continuity of conditions shown at actual boring locations over the entire site. Where possible, borings are located to avoid all obstructions and previous construction which can be found by inspection of the surface and the bidder is required to estimate the influence of such features from its own inspection of the site.



3.5 EXAMINATION:

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
 - 1. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground utilities and other construction indicated as existing are not guaranteed. Before beginning site work, investigate and verify the existence and location of underground utilities and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; and underground electrical services.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with the subcontractor responsible for installation or application present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 - 1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
 - 2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 3. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 - 4. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.6 ENVIRONMENTAL ASSESSMENTS:

- A. City Responsibilities: An Environmental Assessment and survey is performed by the NYC DDC and its findings are included in the Contract Documents. In accordance with the NYC Administrative Code Title 15 Chapter 1 an asbestos survey is required to be performed by an Asbestos Investigator certified by the NYC Department of Environmental Protection (DEP) to identify the presence of asbestos containing material (ACM) prior to any alteration, renovation or demolition activity. The findings of such survey are required for the submission of approvals and permits issued by the NYC Department of Buildings (DOB). When the findings indicate that asbestos containing material is present and will be disturbed during the alteration, renovation or demolition activity then abatement design specifications will be incorporated into the contract documents. The Contractor shall comply with all federal, state and local asbestos regulations affecting the work for this Contract.
- B. Contractor Responsibility: The Contractor shall comply with all federal, state and local environmental regulations, including without limitation USEPA and OSHA regulations which require the Contractor to assess if lead based paint will be disturbed during the work in order to protect his/her workers and the building occupants from migration of lead dust into the air. The Contractor shall comply with all federal, state and local environmental waste disposal regulation which may be required during the work. The Contractor is required to hire licensed abatement and disposal companies for the requisite work.

3.7 PREPARATION:

- A. Field Measurements: The Contractor shall verify all dimensions and conditions on the job so that all work will properly join the existing work.
- B. The Contractor, before commencing work, shall examine all adjoining work on which its work is in any way dependent on good workmanship in accordance to the intent of the Specifications and the Contract



Drawings. The Contractor shall report to the Commissioner any condition that will prevent it from performing work that conforms to the required standard.

- C. Existing Utility Information: Furnish information to the Commissioner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- D. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

3.8 DEFERRED CONSTRUCTION:

- A. Where necessity for deferred construction is certified by the Commissioner, in order to permit the installation of any item or items of equipment required to be furnished and installed concurrent with the time allowed for doing and completing the work of the Contract, the Contractor shall defer construction work limited to adequate areas as approved by the Commissioner.
- B. The Contractor shall confer with the affected trade subcontractors and ascertain arrangements, time and facilities necessary to be made by the Contractor in order to execute the provisions specified herein.

3.9 INSTALLATION:

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- F. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work and work of trade subcontractors to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- G. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by the Design Consultant.
 - 2. Allow for building movement, including thermal expansion and contraction.
 - 3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.



- H. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- I. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.10 PERMITS:

- A. The Contractor shall comply with all local, state and federal laws, rules and regulations affecting the Work of this Project, including, without limitation, (1) obtaining all necessary permits for the performance of the Work prior to commencement thereof, and (2) complying with all requirements for the disposal of demolition and/or construction debris, waste, etc., including disposal in City landfills. The Contractor shall be responsible for all costs in connection with such regulatory compliance, unless otherwise specified in the Contract.

3.11 TRANSPORTATION:

- A. Availability: It shall be the duty of the Contractor to determine the availability of transportation facilities and dockage for the use of its employees, equipment and material and the conditions under which such use will be permitted.
- B. Costs: If transportation facilities and dockage are available and are permitted to be used by the governmental agency having jurisdiction, the Contractor shall pay all necessary costs and expenses, and abide by all rules and regulations promulgated in connection therewith.
- C. Vehicles: With respect to the use of vehicles on highways and bridges, the Contractor's attention is directed to the limitations set forth in the Rules of the City of New York, Title 34, Chapter 4, Section 4-15.
- D. Continued Use: It is understood that the Commissioner makes no warranty as to the continued use by the Contractor of such facilities.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.12

3.12 SLEEVES AND HANGERS:

- A. Coordinate with Progress Schedule: The Contractor shall promptly furnish and install conduits, outlets, piping sleeves, boxes, inserts and all other materials and equipment that is to be built into the work in conformity with the requirements of the project.
- B. Cooperation of Subcontractors: All subcontractors shall fully cooperate with each other in connection with the performance of the above work as "cutting in" new work is neither contemplated nor will it be tolerated.
- C. Timeliness: In the event that timely delivery of sleeves and other materials cannot be made, and to avoid delay, the Contractor may arrange to have boxes or other forms set at the locations where the piping or other material is to pass through or into the slabs, walls or other work. Upon the subsequent installation of the sleeves or other material, the Contractor shall fill around them with materials as required by the Contract. The necessary expenditures incurred for the boxing out and filling in shall be borne by the Contractor.
- D. Inserts: The Contractor is to install strip inserts four (4) feet on center and perpendicular to beams in ceiling slabs of boiler, machine and mechanical equipment rooms. Inserts are to be installed for strippable concrete slabs only.



REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.13

3.13 SLEEVE AND PENETRATION DRAWINGS:

- A. As soon as practicable after the commencement of work and when the order in which concrete for the first slabs, walls, etc. to be poured is determined, the Contractor shall submit to the Resident Engineer a sketch indicating the location and size of all penetrations for sleeves, ducts, etc. which will be required to accommodate the mechanical trades, in order to determine if such penetrations will materially weaken the project's structure. The sketch shall be stamped and returned if approved and/or comments will be transmitted. The Contractor shall continue to submit sketches as the pouring schedule and the concrete work progresses and, until approvals for the penetration sketches have been given. The Contractor shall not predicate its layout work on unapproved sketches.

3.14 CUTTING AND PATCHING:

- A. Responsibility: The Contractor shall do all cutting, patching and restoration required by its work, unless otherwise particularly specified in the Specifications.
- B. Restore Work: The Contractor shall restore any work damaged during the performance of the work.
- C. Competent Workers: All restoration work shall be done to the satisfaction of the Commissioner by competent workers skilled in the trade required by such restoration. If, in the judgment of the Commissioner, workers engaged in restoration work are incompetent, they shall be replaced immediately by competent workers.
- D. Structural Elements: Do not cut and patch structural elements without the prior approval, in writing, of the Resident Engineer.
- E. Operational Elements: Do not cut and patch operating elements and related components.
- F. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in a manner that would, in Commissioner's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- G. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.
- H. Removals: The Contractor must remove from the premises all demolished materials of every nature or description resulting from cutting, patching and restoration work, in accordance with the requirements hereinafter stipulated under Sub-Section 3.17 herein and as further required in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.15

3.15 LOCATION OF PARTITIONS:

- A. Within three (3) weeks after the concrete slabs have been poured on each floor level, the Contractor shall immediately locate accurately all of the partitions, including the door openings, on the floor slabs in a manner approved by the Resident Engineer.



3.16 FURNITURE AND EQUIPMENT:

- A. Responsibility: The Contractor is responsible for moving all loose furniture and/or equipment in all areas where the location of such furniture and/or equipment interferes with the proper performance of its work.
- B. Protection: All such furniture and/or equipment must be adequately protected with dust cloths and returned to their original locations when directed to do so by the Resident Engineer.

3.17 REMOVAL OF RUBBISH AND SURPLUS MATERIALS:

- A. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized. Comply with requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- B. Rubbish: Rubbish shall not be thrown from the windows or other parts of the project. Mason's rubbish, dirt and other dust-producing material shall be wetted down periodically.
- C. Location: The Contractor shall clean Project site and work area daily and sweep up and deposit, at a location designated on each floor, all of its rubbish, debris and waste materials, as it accumulates and when directed by the Resident Engineer. Wood crating shall be broken up, neatly bundled, tied and stacked ready for removal and be deposited at a location designated on each floor.
 - 1. Comply with requirements in NYC Fire Department for removal of combustible waste materials and debris.
 - 2. Do not hold materials more than 7 days during normal weather or 3 days if the temperature is expected to rise above 80 degrees F (27 degrees C).
 - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- D. Laborers: The Contractor shall be responsible for the removal of all rubbish, etc., from the site. The Contractor shall remove from the designated locations all piles of rubbish, debris, waste material and wood crating as they accumulate and when directed by the Resident Engineer, and shall remove them from the site. The Contractor shall employ and keep engaged for this purpose an adequate number of laborers.
- E. Surplus Materials: The Contractor shall remove from the site all surplus materials when there is no further use for same.
- F. Tools And Materials: At the conclusion of the work, all erection plant, tools, temporary structures and materials belonging to the Contractor shall be promptly removed.
- G. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.

3.18 CLEANING:

- A. The Contractor shall thoroughly clean all equipment and materials furnished and installed and shall deliver such materials and equipment undamaged in a clean and new appearing condition up to date of Final Acceptance.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- D. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.



- E. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration up to date of Final Acceptance.
- F. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration up to date of Final Acceptance.

3.19 SECURITY AND PROTECTION OF WORK SITE:

- A. Provide protection of installed work, including appropriate protective coverings and maintain conditions that ensure installed Work is without damage or deterioration up to date of Final Acceptance..
- B. Comply with manufacturer's written instructions for temperature and relative humidity.
- C. Secure and protect work and work site against damage, loss, injury, theft and/or vandalism.
- D. Maintain daily sign-in sheets of workers and visitors and make the sheets available to the Commissioner

3.20 MAINTENANCE OF SITE AND ADJOINING PROPERTY:

- A. The Contractor shall take over and maintain the Project site, after order to start work.
- B. The Contractor shall be responsible for the safety of the adjoining property, including sidewalks, paving, fences, sewers, water, gas, electric and other mains, pipes and conduits etc. until the date of Final Acceptance. The Contractor shall, at its own expense, except as otherwise specified, protect same and maintain them in at least as good a condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained and repaired to serviceable condition with materials to match existing.
- D. Provide and keep in good repair all bridging and decking necessary to maintain vehicular and pedestrian traffic.
- E. The Contractor shall also remove all snow and ice as it accumulates on the sidewalks within the Contract Limits Lines.

3.21 MAINTENANCE OF PROJECT SITE:

- A. The Contractor shall take over and maintain all project areas, after order to start work.
- B. Until the date of Final Acceptance, the Contractor shall be responsible for the safety of all project areas, including water, gas, electric and other mains and pipes and conduits and shall at the Contractor's own expense, except as otherwise specified, protect same and maintain them in at least as good condition as that in which the Contractor finds them.
- C. All pavements, sidewalks, roads and approaches to fire hydrants shall be kept clear at all times, maintained, and if damaged, repaired to serviceable conditions with materials to match existing.
- D. The Contractor shall keep the space for the Resident Engineer in a clean condition.

3.22 SAFETY PRECAUTIONS FOR CONTROL CIRCUITS:

- A. Control circuits, the failure of which will cause a hazard to life and property, shall comply with the New York City 2011 Electrical Code requirements.

3.23 OBSTRUCTIONS IN DRAINAGE LINES:

- A. The Contractor shall be responsible for all obstructions occurring in all drainage lines, fittings and fixtures after the installations and cleaning of these drainage lines, fittings and fixtures as certified by the Resident Engineer. Roof drains shall be kept clear of any and all debris. Any stoppage shall be repaired immediately at the expense of the Contractor.

END OF SECTION 01 73 00



SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This section includes administrative and procedural requirements for the management and disposal of construction waste and includes the following requirements:
1. Waste Management Goals
 2. Waste Management Plan
 3. Progress Reports
 4. Progress Meetings
 5. Management Plan Implementation
- B. This Section includes:
1. Definitions
 2. Waste Management Performance Requirements
 3. Reference Resources
 4. Submittals
 5. Quality Assurance
 6. Waste Plan Implementation
 7. Additional Demolition and Salvage Requirements
 8. Disposal

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 73 00 EXECUTION
- E. Section 01 77 00 CLOSEOUT PROCEDURES
- F. Section 01 78 39 CONSTRUCTION RECORD DOCUMENTS
- G. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Clean: Untreated and unpainted; not contaminated with oils, solvents, caulk or the like.



- D. Construction and Demolition Waste: Solid wastes typically including building materials, trash debris and rubble resulting from remodeling, repair and demolition operations. Hazardous materials and land clearing waste are not included.
- E. Diversion from Landfill: To remove, or have removed, from the site for recycling, reuse or salvage, material that might otherwise be sent to a landfill.
- F. Recyclable: The ability of a product or material to be recovered at the end of its life cycle and remanufactured into a new product.
- G. Recycle (recycling): To sort, separate, process, treat or reconstitute solid waste and other discarded materials for the purpose of redirecting such materials into the manufacture of useful products. Recycling does not include burning, incinerating or thermally destroying waste.
- H. Return: To give back reusable items or unused products to vendors.
- I. Reuse: To reuse excess or discarded construction material in some manner on the Project site.
- J. Salvage: To remove a waste material from the Project site for resale or reuse.
- K. Waste: Extra material or material that has reached the end of its useful life in its intended use. Waste includes salvageable, returnable, recyclable and reusable material.
- L. Waste Management Plan: A project-related plan for the collection, transportation and disposal of waste generated at the construction site. The purpose of the plan is to ultimately reduce the amount of material becoming landfill.

1.5 WASTE MANAGEMENT PERFORMANCE REQUIREMENTS:

- A. The City of New York has established that this project shall generate the least amount of waste possible and that processes that ensure the generation of as little waste as possible due to error, inaccurate planning, breakage, mishandling, contamination, or other factors shall be employed.
- B. Of the waste that is generated during demolition, as many of the waste materials as economically feasible, and as stated here, shall be reused, salvaged, or recycled. Waste disposal in landfills shall be minimized.

REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 1.5 C

- C. LEED CERTIFICATION: The City of New York will seek LEED (Leadership in Energy and Environmental Design) certification for this Project as indicated in the Addendum to the General Conditions from the U.S. Green Building Council. The documentation required here will be used for this purpose. LEED awards points for a variety of sustainable design measures on a project, one of which is the reuse and recycling of project waste.
- D. DIVERSION REQUIREMENTS. A minimum of 75% of total Project demolition waste (by weight) shall be diverted from landfill. The following waste categories are likely candidates to be included in the diversion plan as applicable for this project:
 - 1. Concrete
 - 2. Bricks
 - 3. Concrete masonry units (CMU)
 - 4. Asphalt
 - 5. Metals (e.g. banding, stud trim, ceiling grid, ductwork, piping, rebar, roofing, other trim, steel, iron, galvanized, stainless steel, aluminum, copper, zinc, brass, bronze)



6. Clean dimensional wood
 7. Carpet and pad
 8. Drywall
 9. Ceiling tiles
 10. Cardboard, paper, and packaging
 11. Reuse items indicated on the Drawings and/or elsewhere in the Specification
- E. All fluorescent lamps, HID lamps and mercury-containing thermostats removed from the site shall be recycled.
- F. Recycling on the job, subject to the Commissioner's approval, is encouraged on the site itself, such as the crushing and reuse of removed sound concrete and stone. Include these categories in the Waste Management Plan.

1.6 REFERENCES, RESOURCES:

- A. DDC encourages its contractors to seek information from websites and experts in salvage or recycling in order to minimize disposal costs. There are numerous opportunities to sell, salvage, or to donate materials and accrue tax benefits (which would accrue to the contractor); also there are outlets that will pick up, and in some cases buy recyclable materials. Examples of information resources are as follows:
1. DDC's Sustainable Design web site:
http://www.nyc.gov/html/ddc/html/design/sustainable_home.shtml This includes a manual on Construction and Demolition Waste Reduction and Recycling, a Sample Waste Management Plan and sample C&D Waste Management log. A standard Construction and Demolition Waste Management Log form is included at the end of this section.
 2. Web Resources
(Information only; no warranty or endorsement is implied.)
www.wastematch.org Site of New York Waste Match, a materials exchange database and service
www.bignyc.org Site of Build It Green NYC, a non-profit outlet for salvaged and surplus building materials
www.usgbc.org Site of the United States Green Building Council, with a description of the LEED certification process and requirements for C&D waste recycling
www.epa.gov/epawaste/index.htm Site of the U.S. Environmental Protection Agency that discusses construction and demolition waste issues, and links to other resources.

1.7 SUBMITTALS:

- A. The Contractor shall be responsible for the development and implementation of a Waste Management Plan for the Project. The Contractor's subcontractors shall assist in the development of that Plan, and collect and deposit their waste and recyclable materials in accordance with the approved Plan.
- B. DRAFT WASTE MANAGEMENT PLAN. Within fifteen (15) days after receipt of 'Notice to Proceed', or prior to any waste removal, whichever occurs sooner, the Contractor shall submit to the Commissioner a Draft Waste Management Plan. Include separate sections for demolition and construction waste. The Plan shall demonstrate how the performance goals will be met, and contain the following:



1. List of materials targeted for reuse, salvage, or recycling, and names, addresses, and phone numbers of receiving facilities/companies that will be purchasing or accepting each material.
 2. Description of onsite and/or offsite sorting methods for all materials to be removed from site.
 3. If mixed construction and demolition waste is to be sorted off-site, provide a letter from the processor stating the average percentage of mixed construction and demolition waste they recycle.
 4. Landfill information: Names of landfills where non-recyclable/reusable/salvageable waste will be disposed, and list of applicable tipping fees.
 5. Materials handling procedures: A description of the means by which any recyclable, salvaged, or reused materials will be protected from contamination, and collected in a manner that will meet the requirements for acceptance by the designated recycling processors.
 6. Transportation: A description of the means of transportation and destination for recycled materials.
 7. Meetings: Description of regular meetings to be held to address waste management.
 8. Sample spreadsheet and description of how the implementation of the plan will be documented on a monthly basis.
- C. **FINAL WASTE MANAGEMENT PLAN.** Within fifteen (15) days of Commissioner's approval of the Draft Plan, the Contractor shall submit a Final Waste Management Plan.
- D. **PROGRESS REPORTS.** The Contractor shall submit monthly a Waste Management Progress Report, containing the following information:
1. Project title, name of company completing report, and dates of period covered by the report
 2. Report on the disposal of all jobsite waste. A DDC C&D Waste Management Log form is available on the DDC Sustainable Design website and included at the end of this section. For each shipment of material removed from the site, provide the following:
 - a. Date and ticket number of removal
 - b. Identity of material hauler
 - c. Material Category
 - d. Total quantity of waste, in tones/cubic yards, by type
 - e. Quantity of waste salvaged, recycled and/or reused, by type
 - f. Total quantity of waste diverted from landfill (recycled, salvaged, reused) as a percentage of total waste
 - g. Recipient of each material type
 3. Provide monthly and cumulative project totals of waste, quantity diverted, and percentage diverted.
 4. Note that the unit of measure may be either tons or cubic yards, but must be consistent for all shipments and all materials throughout the project. Reports with inconsistent or mixed units will not be reviewed and will be returned for re-submission.
 5. Include legible copies of on-site logs, weight tickets and receipts. Receipts shall be from charitable organizations, recycling and/or disposal site operators who can legally accept the materials for the purpose of reuse, recycling or disposal. Contractor shall save such original documents for the life of the project plus seven (7) years.
- E. **LEED Submittal:** For LEED designated projects submit LEED Letter Template for the applicable credit, signed by the Contractor, tabulating total waste material, quantities diverted and means by which it is diverted, and statement that requirements for the credit have been met.
- F. **Refrigerant Recovery.** Submit Qualification data for Refrigerant recovery technician and statement of refrigerant recovery, signed by the refrigerant recovery technician responsible for recovering refrigerant



stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.8 QUALITY ASSURANCE:

- A. The Contractor shall designate a Waste Management Coordinator, to ensure compliance with this section. Coordinator shall be present at Project site full time for the duration of the project.
- B. Refrigerant Recovery Technician Qualifications: Certified by EPA-approved certification program.
- C. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction.
- D. Waste management plans, documentation and implementation shall be discussed at the following meetings:
 - 1. Pre-demolition kick-off meeting
 - 2. Pre-construction kick-off meeting
 - 3. Regular job-site meetings
 - 4. Contractor toolbox meetings

PART II – PRODUCTS (Not Used)

PART III – EXECUTION

3.1 WASTE PLAN IMPLEMENTATION:

- A. The Contractor shall implement the Waste Management Plan, coordinate the Plan with all affected trades, and designate one individual as the Construction Waste Management Representative, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. The Contractor shall be responsible for the provision of containers and the removal of all waste, non-returned surplus materials, and rubbish from the site in accordance with the approved Waste Management Plan. The Contractor shall oversee and document the results of the Plan. Monies received for salvaged materials shall remain with the Contractor, except the monies for those items specifically identified elsewhere in the specifications, or indicated on the drawings as belonging to others.
- C. Responsibilities of Subcontractors: Each subcontractor shall be responsible for collecting its waste, non-returned surplus materials, and rubbish, in accordance with the Waste Management Plan.
- D. Distribution. The Contractor shall distribute copies of the Waste Management Plan to each Subcontractor, Resident Engineer, Construction Manager, and Commissioner.
- E. Training. The Contractor shall provide on-site instruction of proper waste management procedures to be used by all parties in appropriate stages of the Project.
- F. Procedures. Conduct waste management operations to ensure minimum interference with site vegetation, roads, streets, walks and other adjacent occupied and used facilities.
 - 1. Collect co-mingled waste and/or separate all recyclable waste in accordance with the Plan. Specific areas on the Project site are to be designated, and appropriate containers and bins clearly marked with acceptable and unacceptable materials.
 - 2. Inspect containers and bins for contamination and remove contaminated materials if found.



3. Comply with the General Conditions for controlling dust and dirt, environmental protection, and noise control.

3.2 ADDITIONAL DEMOLITION AND SALVAGE REQUIREMENTS:

- A. Demolition and salvage of additional items indicated in other sections of the Project Specifications require special attention as part of the overall 75 % diversion from landfill. Specific requirements for special attention are designated in other sections of the Project Specifications.

3.3 DISPOSAL:

- A. General. Except for items or material to be salvaged, recycled or otherwise reused, remove waste material from the Project site and legally dispose of them in a manner acceptable to authorities having jurisdiction.
 1. Except as otherwise specified, do not allow waste materials that are to be disposed of to accumulate on site.
 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning. Do not burn waste materials
- C. Disposal. Transport waste materials off Project Site and legally dispose of them.

END OF SECTION 01 74 19



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT LOG

No Text



**SECTION 01 77 00
CLOSEOUT PROCEDURES**

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Closeout Procedures, including without limitation the following:
1. Definitions
 2. Substantial Completion
 3. Final Acceptance
 4. Warranties
 5. Final Cleaning
 6. Repair of the Work
- B. LEED: Refer to the Addendum to identify whether this project is designed to comply with a Certification Level according to the U.S. Green Building Council's Leadership in Energy & Environmental Design (LEED) Rating System, as specified in Section 01 81 13, "SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS."
- C. COMMISSIONING: Refer to the Addendum to identify whether this project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED- NC procedures, as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS. The Contractor shall cooperate with the commissioning agent and provide whatever assistance is required.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT & DISPOSAL
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 79 00 DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or



combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

- C. Substantial Completion: shall mean the written determination by the Commissioner that the Work required under the Contract is substantially, but not entirely, complete.
- D. Final Acceptance: shall mean final written acceptance of all the Work by the Commissioner, a copy of which shall be sent to the Contractor.

1.5 SUBSTANTIAL COMPLETION:

- A. Preliminary Procedures: Before requesting inspection to determine the date of Substantial Completion, the Contractor shall complete and supply all items required by the contract specifications, General Conditions, Addendum to the General Conditions, change orders or other directives from the Commissioner's representatives. The required items will include all contract requirements for substantial completion, including but not limited to items related to releases, regulatory approvals, warranties and guarantees, record documents, testing, demonstration and orientation, final clean up and repairs, and all specific checklist of items by the Resident Engineer. (See Attachment "A" at the end of this section for sample requirements for Substantial Completion).
- B. Prepare and submit a list to the Resident Engineer of incomplete items, the value of incomplete construction, and reasons the work is not complete.
- C. Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Substantial Completion. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer makes a determination that the work is substantially complete and approves the Final Punch List and the date for Final Acceptance, he/she will so advise the Commissioner and recommend issuance of the Certificate of Substantial Completion. If the Resident Engineer determines that the work is not substantially complete, he/she will notify the Contractor of those items that must be completed or corrected before the Certificate of Substantial Completion will be issued.
 - 1 Re-inspection: Contractor shall request re-inspection when the Work identified in previous inspections as incomplete is completed or corrected.
 - 2 Results of completed inspection will form the basis of requirements for Final Acceptance.

1.6 FINAL ACCEPTANCE:

- A. Preliminary Procedures: Before requesting final inspection for Final Acceptance of the Work, the Contractor shall complete the following. (Note that the following are to be completed, submitted as appropriate, and approved by the Commissioner, as applicable, prior to the final inspection and are not to be submitted for approval or otherwise at the final inspection unless specifically indicated). List exceptions in the request.
 - 1. Verify that all required submittals have been provided to the Commissioner including but not limited to the following:
 - a. Manufacturer's cleaning instructions
 - b. Posted instructions
 - c. As-built Record Documents (Drawings, specifications, and product data) as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, incorporating any changes required by the Commissioner as a result of the review of the submission prior to the pre-final inspection.
 - d. Operation and Maintenance Manuals, including Preventive Maintenance, Special Tools, Repair Requirements, Parts List, Spare Parts List, and Operating Instructions.

- e. Completion of required Demonstration and Orientation, as applicable, of designated personnel in operation and maintenance of systems, sub-systems and equipment.
 - f. Applicable LEED Building submittals as described in Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.
 - g. Construction progress photographs as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
2. Submit a certified copy of the final approved Punch List of items to be completed or corrected. The certified copy of the Punch List shall state that each item has been completed or otherwise resolved for acceptance, and shall be endorsed and dated by the Contractor.
 3. Submit pest-control final inspection report and survey as required in Section 01 50 00, TEMPORARY FACILITIES AND CONTROLS.
 4. Submit record documents and similar final record information.
 5. Deliver tools, spare parts, extra stock and similar items.
 6. Complete final clean-up requirements including touch-up painting of marred surfaces.
 7. Submit final meter readings for utilities, as applicable, a measured record of stored fuel, and similar data as of the date when the City took possession of and assumed responsibility for corresponding elements of the work.
- B. Final Inspection: The Contractor shall submit to the Resident Engineer a written request for inspection for Final Acceptance of the Work. Within ten (10) days of receipt of the request, the Resident Engineer will either proceed with inspection or notify the Contractor of unfulfilled requirements. The Resident Engineer may request the services, as required, of the Design Consultant, Client Agency Representative and/or other entities having involvement with the Work to assist in the inspection of the Work. If the Resident Engineer finds that all items on the Final Approved Punch List are complete and no further work remains to be done, he/she will so advise the Commissioner and recommend the issuance of the determination of Final Acceptance. If the Resident Engineer determines that the work is not complete, he/she will notify the Contractor of those items that must be completed or corrected before the determination of Final Acceptance will be issued.
- C. Final Acceptance: The Work will be accepted as final and complete as of the date of the Resident Engineer's inspection if, upon such inspection, the Resident Engineer finds that all items on the Punch List are complete and no further Work remains to be done. The Commissioner will then issue a written determination of Final Acceptance.

1.7 WARRANTIES:

- A. The items of materials and/or equipment for which manufacturer warranties are required are listed in Schedule B of the Addendum. For each item of material and/or equipment listed in Schedule B, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth in Schedule B and will be replaced or repaired within such specified period. The contractor shall deliver all required warranties to the Commissioner.
- B. Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.
- C. Submittal Time: Submit written Warranties on request of the Commissioner for designated portions of the Work where commencement of Warranties other than date of Substantial Completion is indicated.
- D. Partial Occupancy: Submit properly executed Warranties to the Commissioner within 15 days of completion of designated portions of the Work that are completed and occupied or used by the City.
- E. Organize the Warranty documents into an orderly sequence based on the Project Specification Divisions and Section Numbers.



1. Bind Warranties in heavy-duty, 3-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 2. Identify each binder on the front and spine with the typed or printed title "WARRANTIES;" name and location of Project; Capitol Budget Project Number (FMS ID); and Contractor's and applicable subcontractor's name and address.
 3. Provide heavy paper dividers with plastic-covered tabs for each separate Warranty. Mark tab to identify the product or installation.
 4. Provide a typed description of each product or installation being warranted, including the name of the product, and the name, address, and telephone number of the Installer.
- F. When warranted materials and/or equipment require operation and maintenance manuals, provide additional copies of each required Warranty in each required manual. Refer to Section 01 78 39, CONTRACT RECORD DOCUMENTS, for requirements of Operation and Maintenance Manuals.

PART II – PRODUCTS

2.1 MATERIALS:

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART III – EXECUTION

3.1 FINAL CLEANING:

- A. General: Provide final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
1. Complete the following cleaning operations, as applicable, before requesting inspection for Final Acceptance of the Work for entire Project or for a portion of Project:
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; shampoo if visible soil or stains remain.



- j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Touch up and otherwise repair and restore marred, exposed finishes and surfaces. Replace finishes and surfaces that cannot be satisfactorily repaired or restored or that already show evidence of repair or restoration.
 - 1) Do not paint over "UL" and similar labels, including mechanical and electrical nameplates.
 - m. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - n. Replace parts subject to unusual operating conditions.
 - o. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - p. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - q. Clean ducts, blowers, and coils if units were operated without filters during construction.
 - r. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency. Replace burned-out bulbs, and those noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.
 - s. Leave Project clean and ready for occupancy.
 - t. Construction Waste Disposal: Comply with waste disposal requirements in Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
- C. Pest Control: Engage an experienced, licensed exterminator to make a final inspection and rid Project of rodents, insects, and other pests, as required in Section 01 50 00, TEMPORARY FACILITIES, SERVICES AND CONTROLS. Prepare and submit a Pest Control report to the Commissioner.
- D. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on City's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

3.2 REPAIR OF THE WORK:

- A. Subject to the terms of the Contract the Contractor shall complete repair and restoration operations before requesting inspection for determination of Substantial Completion.
- B. Contractor shall repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION 01 77 00

SECTION 01 77 00

ATTACHMENT 'A'

The following list is a general sample of Substantial Completion requirements, including but not limited to:

1. Prepare and submit a list to the Resident Engineer, of incomplete items, the value of incomplete construction, and reasons the work is not complete.
2. Obtain and submit any necessary releases enabling the City unrestricted use of the project and access to services and utilities.
3. Regulatory Approvals: Submit all required documentation from applicable Governing Authorities, including, but not limited to, Department of Buildings (DoB); Department of Transportation (DoT); Department of Environmental Protection (DEP); Fire Department (FDNY); etc. Documentation to include, but not limited to, the following:
 - a. Building Permits, Applications and Sign-offs.
 - b. Permits and Sign-off for construction fences; sidewalk bridges; scaffolds, cranes and derricks; utilities; etc.
 - c. Certificates of Inspections and Sign-offs.
 - d. Required Certificates and Use Permits.
 - e. Certificate of Occupancy (C.O.), Temporary Certificate of Occupancy (T.C.O.) or Letter of Completion as applicable.
4. Submit specific warranties required by the specifications, final certifications, and similar documents.
5. Prepare and submit Record Documents as described in Section 01 78 39, CONTRACT RECORD DOCUMENTS, including but not limited to; approved documentation from Governing Authorities; as-built record drawings and specifications; product data; operation and maintenance manuals; Final Completion construction photographs; damage or settlement surveys; final property surveys; and similar final record information. The Resident Engineer will review the submission and provide appropriate comments. If comments are significant the initial submission will be returned to the Contractor for correction and re-submission incorporating the comments prior to the Final Inspection.
6. Record Waste Management Progress Report: Submit C&D Waste Management logs, with legible copies of weight tickets and receipts required in accordance with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL.
7. If applicable submit LEED Letter Template in accordance with the requirements of Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.
8. Schedule applicable Demonstration and Orientation required in other Sections of the Project Specifications and as described in Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.
9. Deliver tools, spare parts, extra materials, and similar items to location designated by Resident Engineer. Label with manufacturer's name and model number where applicable.
10. Make final changeover of permanent locks and deliver keys to the Resident Engineer. Advise Commissioner of changeover in security provisions.
11. Complete startup testing of systems as applicable.
12. Submit approved test/adjust/balance records.
13. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements as directed by the Resident Engineer.
14. If applicable complete Commissioning requirements as defined in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.
15. Complete final cleaning requirements, including touchup painting.
16. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

SECTION 01 78 39
CONTRACT RECORD DOCUMENTS

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and general procedural requirements for Contract Record Documents, including:
1. As-built Contract Record Drawings.
 2. As-built marked-up copies of Record Specifications, addenda and Change Orders.
 3. As-built marked-up Product Data
 4. Record Samples
 5. Construction Record Photographs
 6. Operating and Maintenance Manuals
 7. Final Site Survey
 8. Guarantees and Warranties
 9. Waste Disposal Documentation
 10. LEED Materials and Matrix
 11. Miscellaneous Record Submittals
- B. The Department of Design and Construction, at the start of construction (kick-off meeting), will furnish to the Contractor at no cost a complete set of Contract Drawings Mylars (reproducible) pertaining to the work to be performed under the Contract. It is the responsibility of the Contractor to modify the Contract Drawings to indicate all changes and corrections, if any, occurring in the work as actually installed. The Contractor is required to furnish all other Mylar (reproducible) drawings, if necessary, such as Addenda Drawings and Supplementary Drawings as may be necessary to indicate all work in detail as actually completed. All professional seals must be blocked out. Title box complete with project title and Design Consultants' names will remain.
- C. Maintenance of Documents and Samples: The Contractor shall maintain, during the progress of the work, an accurate record of the work as actually installed, on Contract Record Drawings, on Mylar (reproducible), in ink. Store record documents and samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition. Make documents and samples available at all times for the Resident Engineer's inspections.

The Contractor's attention is particularly directed to the necessity of keeping accurate records of all subsurface and concealed work, so that the Contract Record Drawings contain this information in exact detail and location. Contract Record Drawings shall also show all connections, valves, gates, switches, cut-outs and similar operating equipment.

For projects designated to achieve a LEED rating the Contractor shall receive a copy of the project's LEED scorecard for the purpose of monitoring compliance with the target objectives and to facilitate coordination with the LEED Consultant. The Contractor shall receive periodic updates of this scorecard,



and is required to submit the final version of the Scorecard at Substantial Completion with other project Record Documents.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- C. Section 01 32 33 PHOTOGRAPHIC DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 77 00 PROJECT CLOSEOUT PROCEDURES

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. As-Built Contract Record Drawings: Comply with the following:
 1. Progress Submission: As directed by the Resident Engineer, submit progress As-Built Contract Record Drawings at the 50% Construction Completion stage.
 2. Final Submission: Before substantial completion payment, the Contractor shall furnish to the Commissioner one (1) complete set of marked-up Mylar (reproducible) As-Built Contract Record Drawings, in ink indicating all of the work and locations as actually installed, plus one (1) set of paper prints which will be furnished to the sponsoring agency by DDC.
 3. As-Built Contract Record Drawings shall be of the same size as that of the Contract Drawings, with a one (1) inch margin on three (3) sides and a two (2) inch margin on the left side for binding.
 4. Each As-Built Contract Record Drawing shall bear the legend "AS-BUILT CONTRACT RECORD DRAWING" in heavy block lettering, one half (1/2) inch high, and contain the following data:

AS-BUILT CONTRACT RECORD DRAWING

Contractor's Name _____
 Contractor's Address _____
 Subcontractor's Name (where applicable) _____
 Subcontractor's Address _____
 Made by: _____ Date _____
 Checked by: _____ Date _____

Commissioner's Representatives
 (Resident Engineer) DDC
 (Plumbing Inspector) DDC
 (Heating & Ventilating Inspector) DDC
 (Electrical Inspector) DDC

5. Record Drawing Title Sheet: The Contractor shall prepare a title sheet, the same size as the Contract Record Drawings, which shall contain the following:
 - a. Heading:
The City of New York
Department of Design and Construction
Division of Public Buildings
 - b. Capital Budget Project Number (FMS ID)
 - c. Name and Location of Project
 - d. Contractor's Name and Address
 - e. Subcontractor's Name and Address (where applicable)
 - f. Record of changes (a caption description of work affected, and the date and number of Change Order or other authorization)
 - g. List of Record Drawings
- B. Record Specifications, Addenda and Change Order: Submit to the Commissioner two (2) copies each of marked-up Record Specifications, Addenda and Change Orders.
- C. Record Product Data: Submit to the Commissioner two (2) sets of Record Product Data.
- D. Record Construction Photographs: Submit to the Commissioner final as-built construction photographs and negatives of the completed work as described in Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION.
- E. Operating and Maintenance Manuals:
 1. Submit three (3) copies each of preliminary manuals to the Resident Engineer for review and approval. The Contractor shall make such corrections, changes and/or additions to the manual until deemed satisfactory by the Resident Engineer. Deliver three (3) copies of the final approved manuals to the Resident Engineer for distribution.
 2. Commissioning: Comply with the requirements of Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS, as well as the requirements set forth in sections of the Project Specifications, for projects designated for Commissioning. Submit four (4) copies each of data designated to be included in the Commissioning Operation and Maintenance Manual to the Resident Engineer. The Resident Engineer will forward such data to the Commissioning Authority/Agent (CxA) for review and comment. The Contractor shall make such corrections, changes and/or additions to the data until deemed satisfactory and deliver four (4) copies of the final data to the Resident Engineer for use by the Commissioning Authority/Agent (CxA) to prepare the Commissioning Operation and Maintenance Manual.
 - a. Non-Commissioning Data: All remaining data not designated for Commissioning and required as part of Maintenance and Operation Manual shall be prepared and assembled in accordance with the requirements of this section for Operating and Maintenance Manuals.
- F. Final Site Survey: Submit Final Site Survey as described in Section 01 73 00, EXECUTION, in quantities requested by the Commissioner, signed and sealed by a Land Surveyor licensed in the State of New York.
- G. Guarantees and Warranties.
- H. Waste Disposal Documents and Miscellaneous Record Documents.



PART II – PRODUCTS

2.1 CONTRACT RECORD DRAWINGS:

- A. Record Prints: The Contractor shall maintain one set of blue- or black-line white prints as applicable of the Contract Drawings and Shop Drawings. If applicable, the Record Contract Drawings and Shop Drawings shall incorporate the arrangement of the work based on the accepted Master Coordination Drawing(s) as described in Section 01 33 00, SUBMITTAL PROCEDURES.
1. Preparation: The Contractor shall mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an understandable drawing technique.
 - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
 2. Change Orders: All changes from Contract Drawings shall be distinctly encircled and identified by Change Order number correlating to changes listed on the "Title Sheet." The Contractor shall show within the encircled areas the work as actually installed.
- B. Content: Types of items requiring marking include, but are not limited to, the following:
- 1 Dimensional changes to Drawings.
 - 2 Revisions to details shown on Drawings.
 - 3 Depths of foundations below first floor.
 - 4 Locations and depths of underground utilities.
 - 5 Revisions to routing of piping and conduits.
 - 6 Revisions to electrical circuitry.
 - 7 Actual equipment locations.
 - 8 Duct size and routing.
 - 9 Locations of concealed internal utilities.
 - 10 Changes made by Change Order
 - 11 Changes made following Commissioner's written orders.
 - 12 Details not on the original Contract Drawings.
 - 13 Field records for variable and concealed conditions.
 - 14 Record information on the Work that is shown only schematically.
- C. Progress Record Mylar's (reproducible): As directed by the Resident Engineer at 50% construction completion, review marked-up Record Prints with the Resident Engineer and the Design Consultant. When directed by the Resident Engineer transfer progress mark-ups to a full set of Mylar's (reproducible) and submit one blue line or black line record copy to the Resident Engineer. The marked-up Mylar's (reproducible) shall be retained by the contractor for completion of mark-up and final submission.
- D. Final Contract Record Mylar's (reproducible): Immediately before final inspection for Certificate of Substantial Completion, review marked-up Record Prints with the Resident Engineer and the Design Consultant. When authorized, complete mark-up of a full set of corrected Mylar's (reproducible) of the Contract Drawings.
1. Incorporate changes and additional information previously marked on Record Prints. Erase, redraw, and add details and notations where applicable.
 2. Refer instances of uncertainty to Resident Engineer for resolution.
 3. Print the As-Built Contract Drawings and Shop Drawings for use as Record Transparencies as described in Sub-Section 1.5.

2.2 RECORD SPECIFICATIONS, ADDENDA AND CHANGE ORDERS:

- A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made
 4. For each principal product, indicate whether Record Product Data has been submitted in operation and maintenance manuals instead of submitted as Record Product Data.
 5. Note related Change Orders and Record Drawings where applicable.
 6. Upon completion of mark-up, submit two (2) complete copies of the marked-up Record Specifications to the Commissioner.

2.3 RECORD PRODUCT DATA:

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 3. If possible, a Change Order proposal should include resubmitting updated Product Data. This eliminates the need to mark up the previous submittal.
 4. Note related Change Orders and Record Drawings where applicable.
 5. Upon completion of mark-up submit to the Commissioner two (2) sets of the marked-up Record Product Data.
 6. Where Record Product Data is required as part of Maintenance Manuals, submit marked-up Product Data as an insert in the manual instead of submittal as record Product Data.

2.4 RECORD SAMPLE SUBMITTAL:

- A. Prior to the date of Substantial Completion, the Contractor shall meet with the Resident Engineer at the site to determine which of the Samples maintained during the construction period shall be transmitted to the Commissioner for record purposes.
- B. Comply with the Resident Engineer's instructions for packaging, identification marking and delivery to DDC. Dispose of other samples as specified for disposal of surplus and waste material.

2.5 OPERATING AND MAINTENANCE MANUALS:

- A. The Contractor shall provide preliminary and final versions of Operating and Maintenance Manuals required for those systems, equipment and materials listed in other Sections of the Project Specifications.
- B. Format: Prepare and assemble Operation and Maintenance Manuals in heavy-duty, 3-ring, hardback loose leaf binders in the form of an instructional manual. All binders for each discipline shall be the same color. When multiple binders are used, correlate data into related consistent groupings. Binder front shall contain permanently attached labels displaying the following:



1. Heading:
The City of New York
Department of Design and Construction
Division of Public Buildings
 2. Capital Budget Project Number (FMS ID)
 3. Name and Location of Project
 4. Contractor's Name and Address
 5. Subcontractor's Name and Address (where applicable)
 6. Dates of the work covered by the contents of the Project Manual.
 7. Binder spine shall display Project Number (FMS ID) and date of completion.
- C. Organization: Include a section in the directory for each of the following:
1. List of documents
 2. List of systems
 3. List of equipment
 4. Table of contents
- D. Arrange content by systems under Specification Section numbers and sequence of Table of Contents of the Project manual. Provide tabbed flyleaf for each separate product, equipment and/or system/subsystem with typed description of product and major component parts of equipment.
- E. Safety warnings or cautions shall be visibly highlighted within each maintenance procedure. Use of such highlights shall be limited to only critical items and shall not be used in an excessive manner which would reduce their effectiveness.
- F. For each product or system, list names, addresses and telephone numbers of Subcontractors and Suppliers, including local source of supplies and replacement parts. Vendors and Supplier listings are to include names, addresses and telephone numbers, including nearest field service telephone numbers.
- G. Where contents of the manual include any manufacturer's catalog pages, clearly indicate the precise items and options included in the installation and delete all manufacturers' data regarding products not included in the installation.
- H. All material within manuals shall be new. Copies used for prior submittals or used in construction shall not be used.
- I. Submit preliminary and final manual editions to the Commissioner according to the approved progress schedule.
- J. Manuals shall present all technical material to the greatest extent possible, with respect to text, tabular matter and illustrations. Illustrations shall preferably consist of line drawings. All applicable drawings shall be included. If available, color photograph prints may be included.
- K. Preliminary manual editions shall be as technically complete as the final manual edition. All illustrations shall be in final forms.
- L. Final manual editions shall be technically accurate and complete and shall represent all "as-built" systems, pieces of equipment, or materials, which have been accepted by the Commissioner. All illustrations, text and tabular material shall be in final form. All shop drawings shall be included as specified in individual Specification Sections.
- M. Building products, applied materials, and finishes: Include product data, with catalog number, size, composition, and color texture designations. Where applicable, provide information for re-ordering custom manufactured products.
- N. Instructions for care and maintenance: Include manufacturers' recommendations for cleaning agents and methods, and recommended schedule for cleaning and maintenance.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

- O. Moisture Protection and Weather Exposed Products: Include product data listing applicable reference standards, chemical compositions, and details of installation. Provide recommendations for inspections, maintenance, and repair.
- P. Additional Requirements: Specified in individual Specification Sections.

2.6 DEMONSTRATION AND ORIENTATION DVD:

- A. Non-Commissioned Projects: The Contractor shall submit final version of applicable Demonstration and Orientation DVD recordings in compliance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

2.7 GUARANTEES AND WARRANTIES:

- A. SCHEDULE B – Requirements for guarantees and warranties for the Project are set forth in Schedule B, which is included as part of the Addendum.
- B. FORM – For all guarantee requirements set forth in Schedule B, the Contractor shall provide a written guaranty, in the form set forth herein.
- C. Submit fully executed and signed manufacturers' Warranties as listed in the Project Specifications and outlined in Schedule B of the Addendum. Refer to Section 01 77 00, CLOSEOUT PROCEDURES for submittal requirements.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

GUARANTY

DDC PROJECT # _____

PROJECT DESCRIPTION _____

CONTRACT # _____

SPECIFICATION SECTION # AND TITLE _____

GUARANTY TO BE IN EFFECT FROM _____

TO _____

The Contractor hereby guarantees that the work specified under the above section of the aforesaid Contract will be free from defects of material and/or workmanship, for the period indicated above.

The Contractor also guarantees that it will promptly repair, restore, rebuild or replace whichever may be deemed necessary by the City, any or all defective material or workmanship of the aforementioned section, that may appear within the guaranty period and any finished work to which damage may occur because of such defects, to the satisfaction of the City and without any cost or expense to the City.

The Contractor hereby agrees to pay to the City the cost of the repairs or replacements should the City make the same because of the failure of the Contractor to do so.

Contractor: _____

By: _____
Signature of Partner or Corporate Officer

Print Name: _____

Subscribed and sworn to before me this
day of _____, year _____

Notary Public

2.8 WASTE DISPOSAL DOCUMENTATION:

- A. Certify and deliver to the Commissioner all documentation including reports, receipts, certificates, records etc. for the collection, handling, storage, classification, testing, transportation, recycling and/or disposal of all Non-Hazardous Construction Waste as required by Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL, and Hazardous Waste as required by other Project Specification Sections. Certify compliance with all applicable governing laws, codes, rules and regulations.

2.9 MISCELLANEOUS RECORD DOCUMENTS:

- A. Refer to other Project Specification Sections for miscellaneous record-keeping requirements and submittals in connection with various construction activities. Prior to Final Acceptance, complete miscellaneous records and place in good order, properly identified and bound or otherwise organized to allow for use and reference.
- B. Submit three (3) copies of each document to the Commissioner or as otherwise directed by the Commissioner.

PART III – EXECUTION

3.1 RECORDING AND MAINTENANCE:

- A. Recording: Maintain one copy of each submittal during the construction period for Contract Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Contract Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to the Contract Record Documents for the Resident Engineer's reference during normal working hours.

END OF SECTION 01 79 39



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text

SECTION 01 79 00
DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 79 00

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes administrative and procedural requirements, when set forth in sections of the Project Specifications, for instructing facility's personnel, including the following:
1. Demonstration of operation of systems, subsystems, and equipment.
 2. Owner's Pre-Acceptance Orientation in operation and maintenance of systems, subsystems, and equipment.
 3. Demonstration and Orientation videotapes. (Non-Commissioned Projects)
- B. The Contractor shall provide the services of equipment manufacturers orientation specialists experienced in the type of equipment to be demonstrated.
- C. Separate Orientation sessions shall be conducted for mechanical operations and maintenance personnel and for electronic and electrical maintenance personnel.
- D. Commissioning: Refer to the Addendum to identify whether this project is to be Commissioned. For Commissioned projects the Contractor shall provide Demonstration and Orientation as described in this section and cooperate with the Commissioning Authority/Agent (CxA) to implement Commissioning requirements as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.

1.3 RELATED SECTIONS: include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 33 00 SUBMITTAL PROCEDURES
- C. Section 01 77 00 CLOSEOUT PROCEDURES
- D. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- E. Section 01 91 13 GENERAL COMMISSIONING REQUIREMENTS
- F. Specific requirements for demonstration and orientation indicated in other sections of the Project Specifications

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.

1.5 SUBMITTALS:

- A. Instruction Program: Submit three (3) copies of outline of instructional program for demonstration and orientation, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each orientation module to the Commissioner for approval no less than thirty (30) days prior to the date the proposed orientation is to take place. Include learning objectives and outline for each orientation module.
1. At completion of orientation, submit three (3) complete orientation manual(s) and three (3) applicable DVD recording(s) to the Commissioner for the facility's and City's use.
- B. Qualification Data: For facilitator, instructor and Videographer.
- C. Attendance Record: For each orientation module, submit list of participants and length of instruction time.
- D. Evaluations: For each participant and for each orientation module, submit results and documentation of performance-based test.
- E. Submit all final orientation material to the Resident Engineer a minimum of fourteen (14) days prior to the scheduled orientation.
- F. Demonstration and Orientation Recordings:
1. Non-Commissioned Projects:
 - a. The Contractor shall submit to the Commissioner three (3) copies of Demonstration and Orientation DVD (Digital Video Disk) recordings within seven (7) days of end of each orientation module.
 - b. Identification: On each copy, provide an applied label with the following information:
 - 1) Project Contract I.D. Number
 - 2) Project Contract Name
 - 3) Name of Contractor
 - 4) Name of Subcontractor as applicable
 - 5) Name of Design Consultant
 - 6) Name of Construction Manager as applicable
 - 7) Date recorded.
 - 8) Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 - 9) Table of Contents including list of systems covered.
 - c. Transcript: Prepared on 8-1/2-by-11-inch paper, hole-punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding DVD recording. Include name of Project and date of recording on each page.
 2. Commissioned Projects:
 - a. Demonstration and Orientation DVD recordings for Commissioned projects will be recorded by the Commissioning Authority/Agent (CxA) under separate contract with the City of New

York. The Contractor performing Demonstration and Orientation shall cooperate with the CxA in the recording of each Demonstration and Orientation module.

1.6 QUALITY ASSURANCE:

- A. Facilitator Qualifications: A firm or individual experienced in orientation or educating maintenance personnel in an orientation program similar in content and extent to that indicated for this Project.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 01 40 00, QUALITY REQUIREMENTS, experienced in operation and maintenance procedures and orientation.
- C. Videographer Qualifications: A professional Videographer who has experience with orientation and construction projects.
- D. Pre-instruction Conference: Schedule with the Resident Engineer a conference at Project site to comply with requirements in Section 01 31 00, PROJECT MANAGEMENT AND COORDINATION. Review methods and procedures related to demonstration and orientation including, but not limited to, the following:
 - 1. Inspect and discuss locations and other facilities required for instruction.
 - 2. Review and finalize instruction schedule and verify availability of educational materials, instructors' personnel, audiovisual equipment, and facilities needed to avoid delays.
 - 3. Review required content of instruction.
 - 4. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

1.7 COORDINATION:

- A. Coordinate instruction schedule with the Resident Engineer and facility's operations. Adjust schedule as required to minimize disrupting facility's operations.
- B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
- C. Coordinate content of orientation modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the Commissioner.

PART II – PRODUCTS

2.1 INSTRUCTION PROGRAM:

- A. Program Structure: Develop an instruction program that includes individual orientation modules for each system and equipment not part of a system, as specified and required by individual Specification Sections.
- B. Orientation Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following:
 - 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.



- d. Regulatory requirements.
 - e. Equipment function including auxiliary equipment and systems.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - h. Performance curves.
2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.
 - c. Maintenance manuals.
 - d. Project Record Documents.
 - e. Identification systems.
 - f. Warranties
 3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
 4. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.
 - i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
 5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
 6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
 7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning



- e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
 - h. Housekeeping practices
8. Repairs: Include the following:
- a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.

PART III – EXECUTION

3.1 INSTRUCTION:

- A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and the Resident Engineer for the number of participants, instruction times, and location.
- B. The Contractor shall engage qualified instructors to instruct facility's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
- C. Scheduling: Schedule instruction with the Resident Engineer at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 - 1. Schedule orientation with the Resident Engineer with at least fourteen (14) days' advance notice.
- D. Evaluation: At conclusion of each orientation module, assess and document each participant's mastery of module(s) by use of an oral a written or a demonstration performance-based test.
- E. Cleanup: Collect and remove used and leftover educational materials from project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial orientation use.

**REFER TO THE ADDENDUM FOR THE APPLICABILITY OF SUB-SECTION 3.2.A or
SUB-SECTION 3.2.B**

3.2 DEMONSTRATION AND ORIENTATION RECORDINGS:

- A. Non-Commissioned projects:
 - 1. The Contractor shall engage a qualified commercial Videographer to record demonstration and orientation sessions. Record each orientation module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.
 - 2. At beginning of each orientation module, record each chart containing learning objective and lesson outline.
 - 3. All recordings must be close captioned.
 - 4. Recording Format: Provide high-quality DVD (Digital Video Disk) format.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

5. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and orientation. Display continuous running time.
 6. Narration: Describe scenes on the recording by audio narration by microphone while recording or by dubbing audio narration off-site after. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 7. Transcript: Provide a typewritten transcript of the narration. Display images and running time captured from opposite the corresponding narration segment.
- B. Commissioned Projects:
1. The Commissioning Authority/Agent (CxA) under separate contract with the City of New York will be responsible for DVD recording of Demonstration and Orientation sessions as described in Section 01 91 13, GENERAL COMMISSIONING REQUIREMENTS.

END OF SECTION 01 79 00



SECTION 01 81 13
SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

A. LEED BUILDING - GENERAL REQUIREMENTS:

The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED™ Green Building rating. Specific project requirements related to this goal are listed in the applicable paragraphs of this section of the General Conditions. The Contractor shall ensure that these requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated LEED BUILDING criteria.

B. This Section includes:

1. Definitions
2. LEED Provisions
3. LEED Building Submittals
4. LEED Building Submittal Requirements
5. LEED Action Plan

1.3 RELATED SECTIONS: Include without limitation the following:

- | | | |
|----|---------------------|--|
| A. | Section 01 74 19 | CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL |
| B. | Section 01 81 13.13 | VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES,
SEALANTS, PAINTS AND COATINGS |
| C. | Section 01 81 19 | INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS |
| D. | Section 01 91 13 | GENERAL COMMISSIONING REQUIREMENTS |

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Agrifiber Products: Products derived from recovered agricultural waste fiber from sources such as cereal straw, sugarcane bagasse, sunflower husk, walnut shells, coconut husks, and agricultural prunings, processed and mixed with resins to produce panels with characteristics similar to composite wood.



- C. Composite Wood: Products composed of wood or plant particles or fibers bonded by a synthetic resin or binder to produce panels such as plywood, particleboard, and medium density fiberboard (MDF). Does not include hardboard, structural panels, glued laminated timber, prefabricated wood I-joists, or finger-jointed lumber.
- D. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- E. Forest Stewardship Council (FSC) Certified Wood: Wood-based materials and products certified in accordance with the Forest Stewardship Council's principles and criteria.
- F. LEED: The Leadership in Energy & Environmental Design rating system developed by the United States Green Building Council.
- G. Rapidly Renewable Materials: Materials made from agricultural products that are typically harvested within a ten-year or shorter cycle. Rapidly renewable materials include products made from bamboo, cotton, flax, jute, straw, sunflower seed hulls, vegetable oils, or wool.
- H. Regionally Manufactured Materials: Materials that are manufactured within a radius of 500 miles from the Project location. Manufacturing refers to the final assembly of components into the building product that is installed at the Project site.
- I. Regionally Extracted, Harvested, or Recovered Materials: Materials which are extracted, harvested, or recovered and manufactured within a radius of 500 miles from the Project site.
- J. Recycled Content: The percentage by weight of constituents that have been recovered or otherwise diverted from the solid waste stream, either during the manufacturing process (pre-consumer), or after consumer use (post-consumer).
 - 1. Spills and scraps from the original manufacturing process that are combined with other constituents after a minimal amount of reprocessing for use in further production of the same product are not recycled materials.
 - 2. Discarded materials from one manufacturing process that are used as constituents in another manufacturing process except mechanical and electrical components are pre-consumer recycled materials.
 - 3. "Pre-consumer" may also be referred to as "post-industrial".
- K. Solar Reflectance Index (SRI): A measure of a material's ability to reflect solar heat, as shown by a small temperature rise. It is defined so that a standard black (reflectance 0.05, emittance 0.90) is equal to 0, and a standard white (reflectance 0.80, emittance of 0.90) is equal to 100.
- L. Volatile Organic Compound (VOC): Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.

1.5 LEED PROVISIONS:

- A. Refer to the Addendum for the LEED rating to be achieved for this project. The provisions to achieve this LEED rating are integrated within the project construction documents and specifications. The Contractor is specifically directed to the “LEED BUILDING Performance Criteria” and “LEED BUILDING Submittals” sections within the contract specification. Additional LEED requirements are met through aspects of the project design, including material and equipment selections, which may not be specifically identified as LEED BUILDING requirements. Compliance with the requirements needed to obtain LEED prerequisites and credits will be used as one criterion to evaluate substitution requests.

1.6 LEED BUILDING SUBMITTALS:

- A. Scope: LEED BUILDING submittals are required for all installed materials included in General Construction work. LEED BUILDING Submittals are only required for field-applied adhesives, sealants, paints and coatings included in Plumbing, Mechanical and Electrical work. Submit all required LEED BUILDING submittals in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
- B. Applicability: The extent of the LEED BUILDING Submittals varies depending on the specification section. Applicable LEED BUILDING Submittals are listed under the “LEED BUILDING Submittals” heading in each specification section. The detailed requirements for the LEED BUILDING Submittals are defined in Item C below.
- C. Detailed Requirements: Sub-Sections 1.6 C.1 through 1.6 C.3 below defines the information and documents to be provided for each type of LEED BUILDING Submittal as identified in the LEED Submittal Requirements of each specification section:
1. ENVIRONMENTAL BUILDING MATERIALS CERTIFICATION FORM (EBMCF)[GHI]: Information to be supplied for this form (blank sample copy attached at end of this Section to be modified as appropriate to the project) shall include some or all of the following items, as identified in the LEED Submittal Requirements of each specification section:
 - a. Cost breakdowns for the materials included in the contractor or sub-contractor’s scope of work. Cost reporting shall include itemized material costs (excluding the contractor’s labor, equipment, overhead and profit).
 - b. The percentages (by weight) of post-consumer and/or post-industrial recycled content in the supplied product(s).
 1. For each product with recycled content, also indicate the total recycled content value ($\frac{1}{2} \times \text{pre-consumer percentage} \times \text{product value} + 1 \times \text{post-consumer percentage} \times \text{product value} = \text{total recycled content value}$).
 2. See additional requirements for concrete below.
 - c. Identification (Yes/No) of materials manufactured within 500 miles of the project site AND containing raw materials harvested or extracted within 500 miles of the project site.
 - 1) Indicate the percentage by weight, relative to the total weight of the product that meets these criteria.
 - 2) Indicate the point of harvest/extraction/recovery of regional raw materials, the point of final assembly of regional manufactured products, and the distance from each point to the project site.
 - d. Volatile Organic Compound (VOC) content of all field-applied adhesives, sealants, paints, and coatings, listed in grams/liter or lbs./gallon, less water.
 - 1) For detailed requirements refer to Section 01 81 13.13 VOC LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
 - e. The amount of “Forest Stewardship Council (FSC) Certified” wood products if used in the Project.
 - 1) Record only new FSC-certified wood products. Do not record reclaimed, salvaged, or recycled FSC-certified wood products.



- 2) Reclaimed, salvaged, or recycled FSC-certified wood may be recorded as post-consumer recycled content.
 - f. The amount of Rapidly Renewable materials if used in the Project.
 - 1) Indicate the type of rapidly renewable material used, and the percentage by weight, relative to the total weight of the product, that consists of rapidly renewable material.
 - g. The percentage (by weight), relative to the total weight of cementitious materials, of supplementary cementitious materials or pozzolans such as fly ash used in each concrete mix used in the Project.
 - 1) For each concrete mix, provide a complete breakdown of all components, by weight and by cost.
 - h. Identification (Yes/No) of composite wood or agrifiber products used in the project that are free of added urea-added formaldehyde resins.
 - i. Identification (Yes/No) of flooring products used in the project that have Carpet and Rug Institute (CRI) Green Label or Green Label Plus certification, or Resilient Floor Covering Institute FloorScore certification.
 - 1) Untreated solid wood flooring, and mineral-based flooring products such as tile, masonry, terrazzo, and cut stone that have no organic-based coatings or sealants, are excluded from this requirement.
 - j. The EBMCF shall record the above information only for those materials or products permanently installed in the project. The EBMCF shall record VOC content, composite and agrifiber products, and CRI or FloorScore ratings only for those materials or products permanently installed within the weather barrier of the LEED building.
2. EBMCF BACK-UP DOCUMENTATION: These documents are used to validate the information provided on the EBMCF (except cost data). For each material listed on the EBMCF, provide documentation to certify the material's LEED BUILDING attributes, as applicable:
 - a. RECYCLED CONTENT: Provide published product literature or letter of certification on the manufacturer's letterhead certifying the amounts of post-consumer and/or post-industrial content.
 - b. REGIONAL MANUFACTURING **AND** REGIONAL RAW MATERIALS (WITHIN 500 MILES): Provide published product literature or letter of certification on the manufacturer's letterhead indicating the city/state where the manufacturing plant is located, where each of the raw materials in the product were extracted, harvested or recovered and the distance in miles from the project site.
 - 1) If only some of the raw materials for a particular product or assembly originate within 500 miles of the project site, provide the percentage (by weight) that these materials comprise in the complete product.
 - c. VOC CONTENT: Provide Material Safety Data Sheets (MSDS) certifying the Volatile Organic Compound (VOC) content of the adhesive, sealant, paint, or coating products. VOC content is to be reported in grams/liter or lbs./gallon, less water. If the MSDS does not show the product's VOC content, this information must be provided through other published product literature from the manufacturer, or stated in a letter of certification from the product manufacturer on the manufacturer's letterhead.
 - d. RAPIDLY RENEWABLE MATERIALS: If used in the project, provide published literature or letter of certification on the manufacturer's letterhead certifying the percentage of each product that is rapidly renewable (by weight).
3. PRODUCT CUT SHEETS: Provide product cut sheets with the Contractor's or sub-contractor's stamp, confirming that the submitted products are the products installed in the Project.
4. CRI GREEN LABEL PLUS CERTIFICATION: For carpets and carpet cushions, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the "Green Label Plus" IAQ testing program of the Carpet and Rug Institute of Dalton, GA.

5. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER RESINS:** For all composite wood, engineered wood and agrifiber products (including plywood, particleboard, and medium density fiberboard), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products do not contain added urea-formaldehyde resins.
6. **CERTIFICATION OF COMPOSITE WOOD OR AGRIFIBER LAMINATING ADHESIVES:** For all laminating adhesives used with composite wood, engineered wood and agrifiber products (e.g., adhesives used to laminate wood veneers to an engineered wood substrate), provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the adhesive products do not contain urea-formaldehyde.
7. **FSC-CERTIFIED WOOD:**
 - a. If used in the project, provide chain of custody documents and copies of invoices regarding wood products, including whether or not such wood product is FSC-certified.
 - b. If used in the project, for assemblies, provide the percentage (by cost and by weight) of the assembly that is FSC-certified wood.
 - c. If used in the project, for assemblies, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the percentage that is FSC-certified wood.
8. **GREEN SEAL COMPLIANCE:** Provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the following product types comply with the VOC limits and chemical component restrictions developed by the Green Seal organization of Washington, DC:
 - a. Interior Architectural Paints and Coatings: refer to Green Seal standard GS-11 (1st edition, May 1993)
 - b. Anti-corrosive and Anti-rust paints: refer to Green Seal standard GC-03 (2nd Edition, January 1997)
 - c. Aerosol Adhesives: refer to Green Seal standard GS-36 (1st edition, October 2000)
9. **HIGH ALBEDO PAVING AND WALKWAY MATERIALS:** For paving and walkway materials made from concrete or brick provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying a minimum Solar Reflectance Index (SRI) value of 29. SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.
10. **HIGH ALBEDO ROOFING MATERIALS:** For exposed roofing membranes, pavers, and ballast products, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the following minimum Solar Reflectance Index (SRI) values:
 - a. 78 for low-sloped roofing applications (slope \leq 2:12)
 - b. 29 for steep-sloped roofing applications (slope $>$ 2:12)

SRI values shall be calculated according to ASTM E 1980. Reflectance shall be measured according to ASTM E 903, ASTM E 1918, or ASTM C 1549. Emittance shall be measured according to ASTM E 408 or ASTM C 1371.

Vegetated roof surfaces are exempt from the SRI criteria.
11. **LOW MERCURY LAMPS:** For all fluorescent, compact fluorescent, and HID lamps installed in the project, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying:
 - a. The mercury content or content range per lamp in milligrams or picograms;
 - b. The design light output per lamp (light at 40% of a lamp's useful life) in lumens; and
 - c. The rated average life of the lamp in hours.



In addition, provide the total number of each lamp type installed in the project.

12. **FLOORSCORE CERTIFICATION:** For all hard surface flooring, including vinyl, linoleum, laminate flooring, wood flooring, ceramic flooring, rubber flooring, and wall base, provide published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying that the products comply with the current FloorScore standard requirements.
13. **CONCRETE:** Provide concrete mix design for each mix, designated by a distinct identifying code or number and signed by a Professional Engineer licensed in the state in which the concrete manufacturer or supplier is located.
14. **INTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed within the building's weather barrier, provide manufacturer's cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Dimming capability, in range of percentages.
15. **EXTERIOR LIGHTING FIXTURES:** For each lighting fixture type installed on site, provide manufacturer's cut sheets indicating the following:
 - a. Fixture power in watts.
 - b. Initial lamp lumens.
 - c. Photometric distribution data.
 - d. Range of field adjustability, if any.
 - e. Warranty of suitability for exterior use.
16. **ALTERNATIVE TRANSPORTATION:** Provide manufacturer's cut sheets and/or shop drawings for the following items installed on site:
 - a. Bike racks, including total number of bicycle slots provided.
 - b. Signage indicating parking spaces reserved for electric or low-emitting vehicles and for carpools/vanpools, including total number of signs.
17. **WATER CONSERVING FIXTURES:** For all water consuming plumbing fixtures and fittings, provide manufacturer's cut sheets showing maximum flow rates and/or flush rates.
18. **ENERGY SAVING APPLIANCES:** Provide manufacturer's cut sheets and published product literature or letter from the manufacturer (on the manufacturer's letterhead) verifying the product's rating under the U.S. EPA/DOE Energy Star program, for all of the following:
 - a. Appliances (i.e., refrigerators, dishwashers, microwave ovens, televisions, clothes washers, clothes dryers, chilled water dispensers).
 - b. Office equipment (i.e., copy machines, fax machines, plotters/printers, scanners, binding and publishing equipment).
 - c. Electronics (i.e., servers, desktop computers, computer monitor displays, laptop computers, network equipment).
 - d. Commercial food service equipment
19. **GLAZING:** For glazing in any windows, doors, storefront and window wall systems, curtainwall systems, skylights, and partitions, provide manufacturer's cut sheets indicating the following:
 - a. Glazed area.
 - b. Visible light transmittance.
 - c. Solar heat gain coefficient.
 - d. Fenestration assembly u-factor.
20. **VENTILATION:** Provide manufacturer's cut sheets for the following:
 - a. Carbon dioxide monitoring systems, if any, installed to measure outside air delivery.
 - b. Air filters: for detailed requirements refer to Section 01 81 19 INDOOR AIR QUALITY REQUIREMENTS.
21. **REFRIGERATION:** For all refrigeration equipment, provide manufacturer's cut sheets indicating the following:
 - a. Equipment type.



- b. Equipment life. Default values specified by the 2007 ASHRAE Applications Handbook will be used unless otherwise demonstrated by the manufacturer's guarantee and an equivalent long-term service contract.
- c. Refrigerant type.
- d. Refrigerant charge in pounds of refrigerant per ton of gross cooling capacity.
- e. Tested refrigerant leakage rate, in percent per year. A default rate of 2% will be used unless otherwise demonstrated by test data.
- f. Tested end-of-life refrigerant loss, in percent. A default rate of 10% will be used unless otherwise demonstrated by test data.

1.7 LEED BUILDING SUBMITTAL REQUIREMENTS:

- A. The LEED BUILDING submittal information shall be assembled into one package per specification section(s) (or per subcontractor), and submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Incomplete or inaccurate LEED BUILDING submittals may be used as the basis for rejecting the submittals of products or assemblies.

1.8 LEED ACTION PLANS:

- A. Construction Waste Management Plan- Refer to Section 01 74 19, Construction Waste Management and Disposal for detailed submittal requirements.
- B. Construction IAQ Management Plan- Refer to Section 01 81 19, Indoor Air Quality Requirements for LEED Buildings, for detailed submittal requirements.
- C. Erosion and Sedimentation Control Plan:
 1. The Plan shall be in accordance with the New York State Department of Environmental Conservation (NYSDEC) or the 2003 EPA Construction General Permit, whichever is more stringent.
 2. The Plan shall be submitted in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
 3. Detailed requirements: ESC Plan
 - a. Include the Stormwater Pollution Prevention Plan, if required.
 - b. Identify the party responsible for Plan monitoring and documentation. The party must be regularly on site.
 - c. Describe all site work that will be implemented on the project.
 - d. Provide site plan with location of ESC measures, including, but not limited to, stormwater quantity controls, stormwater quality controls, stabilized construction entrances, washdown areas, and inlet/catch basin protection.
 - e. Describe the inspection and maintenance of the ESC measures. Provide a construction schedule indicating weekly site review.
 - f. Describe reporting and documentation measures.
 4. Detailed requirements: ESC Measures
 5. Submittal requirements: ESC Tracking Log
 - a. Note date of major rain events, describe damage, describe any repairs or maintenance performed, and note responsible party.
 - b. Note date and findings of weekly site review, describe any repairs or maintenance performed, and note responsible party.
 - c. Submit monthly.
 6. Implementation
 - a. The Contractor shall implement the ESC Plan, coordinate the Plan with all affected trades, and designate one individual as the Erosion and Sedimentation Control Representative, who



will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation.

- b. The Contractor shall be responsible for the provision, maintenance, and repair of all ESC measures.
- c. Demonstration. The Contractor shall provide on-site instruction of proper construction practices required to prevent erosion and sedimentation.
- d. Meetings. Urgent or ongoing ESC issues shall be discussed at weekly on-site job meetings.

1.9 QUALITY ASSURANCE:

- A. The Contractor shall implement all LEED Action Plans, coordinate the Plans and LEED Building Submittals with all affected trades, and designate one individual as the Sustainable Construction Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of LEED activities with the Commissioner on a regular basis, and for assembling the required LEED documentation.
- B. Responsibilities of Contractor's Subcontractors: The Contractor shall be responsible for his/her subcontractors complying with the LEED Action Plans and for providing required LEED documentation as required for the project.
- C. Distribution and Compilation: The Contractor shall be responsible for distributing the EBMCF and any other forms or templates required for the subcontractors to record LEED documentation. The Contractor shall also be responsible for collecting and compiling EBMCF information into packages as described in Section 01 33 00 SUBMITTAL PROCEDURES.
- D. Meetings: Sustainable design and construction issues shall be discussed at the following meetings:
 1. Demolition kick-off meeting
 2. Construction kick-off meeting
 3. Construction kick-off meeting for LEED (independent meeting)
 4. Weekly job-site progress and coordination meetings
 5. Closeout meeting

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13

No Text

SECTION 01 81 13.13

VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS FOR LEED BUILDINGS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 13.13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 SUMMARY:

- A. This Section includes requirements for volatile organic compound (VOC) content in adhesives, sealants, paints and coatings used for the project.
- B. All sections in the Project Specifications with adhesives, sealant or sealant primer applications, paints and coatings shall follow all requirements of this section. In the event of any conflict or inconsistency between this section and the Specifications regarding adhesives, sealant or sealant applications, paints and coatings, the requirements set forth in this Section shall prevail.
- C. This Section includes:
1. General Requirements
 2. References
 3. VOC Requirements for Interior Adhesives
 4. VOC Requirements for Interior Sealants
 5. VOC requirements for Interior Paints
 6. VOC requirements for Interior Coatings
 7. Submittals

1.3 RELATED SECTIONS: Include without limitation the following:

- A. Section 01 10 00 SUMMARY
- B. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
- C. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
- D. Section 01 33 00 SUBMITTAL PROCEDURES
- E. Section 01 73 00 EXECUTION
- F. Section 01 77 00 CLOSEOUT PROCEDURES
- G. Section 01 78 39 CONTRACT RECORD DOCUMENTS
- H. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
- I. Section 01 81 19 INDOOR AIR QUALITY FOR LEED BUILDINGS

1.4 DEFINITIONS:

- A. **ADHESIVE:** Any substance used to bond one surface to another by attachment. Includes adhesive primers and adhesive bonding primers.
1. **Aerosol Adhesive:** Any adhesive packaged as an aerosol with a spray mechanism permanently housed in a non-refillable can designed for hand-held application without the need for ancillary equipment.
- B. **CARCINOGEN:** A chemical listed as a known, probable, reasonably anticipated, or possible human

carcinogen by the International Agency for Research on Cancer (IARC) (Groups 1, 2A, and 2B), the National Toxicology Program (NTP) (Groups 1 and 2), the U.S. Environmental Protection Agency (EPA) Integrated Risk Information System (IRIS) (weight-of-evidence classifications A, B1, B2, and C, carcinogenic, likely to be carcinogenic, and suggestive evidence of carcinogenicity or carcinogen potential), or the Occupational Safety and Health Administration (OSHA).

- C. CLEAR WOOD FINISH: Clear/semi-transparent coating applied to wood substrates to provide a transparent or translucent solid film.
 - 1. Lacquer: Clear/semi-transparent coating formulated with cellulosic or synthetic resins to dry by evaporation without chemical reaction and provide a solid, protective film.
 - 2. Sanding Sealer: A sanding sealer that also meets the definition of a lacquer.
 - 3. Varnish: Clear/semi-transparent coating, excluding lacquers and shellacs, formulated to dry by chemical reaction on exposure to air. May contain small amounts of pigment.
- D. COATING: Liquid, liquefiable, or mastic composition that is converted to a solid adherent film after application to a substrate as a thin layer; and is used for decorating, protecting, identifying or to serve some functional purpose such as the filling or concealing of surface irregularities or the modification of light and heat radiation characteristics; and is intended for on-site application to interior or exterior surfaces of buildings. Does not include stains, clear finishes, recycled latex paint, specialty (industrial, marine or automotive) coatings or paint sold in aerosol cans.
- E. FLOOR COATING: Opaque coating applied to flooring. Excludes industrial maintenance coatings.
- F. HAZARDOUS AIR POLLUTANT: Any compound listed by the U.S. EPA in the Clean Air Act Section 112(b)(1) as a hazardous air pollutant.
- G. MUTAGEN: A chemical that meets the criteria for category 1, chemicals known to induce heritable mutations or to be regarded as if they induce heritable mutations in the germ cells of humans, under the Harmonized System for the Classification of Chemicals Which Cause Mutations in Germ Cells (United Nations Economic Commission for Europe, Globally Harmonized System of Classification and Labeling of Chemicals).
- H. OZONE-DEPLETING COMPOUNDS: A compound with an ozone-depletion potential greater than 0.1 (CFC 11=1) according to the U.S. EPA list of Class I and Class II Ozone-Depleting Substances.
- I. PAINT: A pigmented coating. For the purposes of this specification, paint primers are considered to be paints.
 - 1. Flat Coating or Paint: Has a gloss of less than 15 (using an 85-degree meter) or less than 5 (using a 60-degree meter).
 - 2. Non-Flat Coating or Paint: Has a gloss of greater than or equal to 15 (using an 85-degree meter) or greater than or equal to 5 (using a 60-degree meter).
 - 3. Non-Flat High-Gloss Coating or Paint: Has a gloss of greater than or equal to 70 (using a 60-degree meter).
 - 4. Anti-Corrosive / Rust Preventative Paint: Coating formulated and recommended for use in preventing the corrosion of ferrous metal substrates.
- J. PRIMER: Coating that is formulated and recommended for one or more of the following purposes: to provide a firm bond between the substrate and a subsequent coating; to prevent a subsequent coating from being absorbed into the substrate; to prevent harm to a subsequent coating from materials in the substrate; or to provide a smooth surface for application of a subsequent coating.
- K. REPRODUCTIVE TOXIN: A chemical listed as a reproductive toxin (including developmental, female, and male toxins) by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (California Code of Regulations, Title 22, Division 2, Subdivision 1, Chapter 3, Sections 1200, et. Seq.).
- L. SANDING SEALER: Clear/semi-transparent coating formulated to seal bare wood. Can be abraded to create a smooth surface for subsequent coatings. Does not include sanding sealers that are lacquers (see Clear Wood Finish above).
- M. SEALANT: Any material with adhesive properties, formulated primarily to fill, seal, or waterproof gaps or joints.

between surfaces. Includes sealant primers and caulks.

- N. SHELLAC: Clear or pigmented coating formulated solely with the resinous secretions of the lac beetle, thinned with alcohol and formulated to dry by evaporation without chemical reaction. Excludes floor applications.
- O. STAIN: Clear semi-transparent/opaque coating formulated to change the color but not conceal the grain pattern or texture of the substrate.
- P. VOLATILE AROMATIC COMPOUND: Any hydrocarbon compound containing one or more 6-carbone benzene rings, and having an initial boiling point less than or equal to 280 degrees Celsius measured at standard conditions of temperature and pressure.
- Q. VOLATILE ORGANIC COMPOUND: Any compound of carbon (excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate) which vaporizes (becomes a gas) and participates in atmospheric photochemical reactions, as specified in Part 51.00 of Chapter 40 of the U.S. Code of Federal Regulations, at normal room temperatures. For the purposes of this specification, formaldehyde and acetaldehyde are considered to be VOCs.
- R. WATERPROOFING SEALER: A coating that prevents the penetration of water into porous substrates.

1.5 GENERAL REQUIREMENTS:

- A. The City of New York is committed to implementing good environmental practices and procedures which include achieving a LEED Green building rating. Specific project requirements related to this goal which may impact this area of work are listed in the applicable paragraphs of this specification section. The Contractor shall ensure that the requirements as defined in the sections below and in related sections of the Contract Documents, are implemented to the fullest extent. Substitutions, or other changes to the work proposed by the Contractor or their Subcontractors, shall not be allowed if such changes compromise the stated environmental goals.

1.6 REFERENCES:

- A. Rule 1168 – “Adhesive and Sealant Applications”, amended 7 January 2005): South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- B. Rule 1113 - “Architectural Coatings”, amended 9 July 2004: South Coast Air Quality Management District (SCAQMD), State of California, www.aqmd.gov
- C. Green Seal Standard GS-11- “Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org
- D. Green Seal Standard GC-03-“Anti-Corrosive Paints”, of Green Seal, Inc., Washington, DC, www.greenseal.org

1.7 VOC REQUIREMENTS FOR INTERIOR ADHESIVES, SEALANTS, PAINTS AND COATINGS:

- A. GENERAL: Unless otherwise specified herein, the VOC content of all interior adhesives, sealants, paints and coatings (herein referred to as “products”) shall not be in excess of **250 grams per liter**.
- B. No product shall contain any ingredients that are carcinogens, mutagens, reproductive toxins, persistent bioaccumulative compounds, hazardous air pollutants, or ozone-depleting compounds. An exception shall be made for titanium dioxide and, for products that are pre-tinted by the manufacturer, carbon black, which shall be less than or equal to 1% by weight of the product.
- C. No product shall contain the following:
 - 1. methylene chloride
 - 2. 1,1,1-trichloroethane
 - 3. benzene



4. toluene
5. ethylbenzene
6. vinyl chloride
7. naphthalene
8. 1,2-dichlorobenzene
9. di (2-ethylhexyl) phthalate
10. butyl benzyl phthalate
11. di-n-butyl phthalate
12. di-n-octyl phthalate
13. diethyl phthalate
14. dimethyl phthalate
15. isophorone
16. antimony
17. cadmium
18. hexavalent chromium
19. lead
20. mercury
21. formaldehyde
22. methyl ethyl ketone
23. methyl isobutyl ketone
24. acrolein
25. acrylonitrile

D. No product shall contain more than 1.0% by weight of sum total of volatile aromatic compounds.

1.8 VOC REQUIREMENTS FOR INTERIOR ADHESIVES:

- A. The volatile organic compound (VOC) content of adhesives, adhesive bonding primers, or adhesive primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
- C. For specified building construction related applications, the allowable VOC content is as follows:

1. Architectural Applications:
 - a. Indoor carpet adhesive 50
 - b. Carpet pad adhesive 50
 - c. Wood flooring adhesive 100
 - d. Rubber floor adhesive 60
 - e. Subfloor adhesive 50
 - f. Ceramic tile adhesive 65
 - g. VCT and asphalt tile adhesive 50
 - h. Drywall and panel adhesive 50
 - i. Cove base adhesive 50
 - j. Multipurpose construction adhesive 70
 - k. Structural glazing adhesive 100
2. Specialty Applications:
 - a. PVC welding 510
 - b. CPVC welding 490
 - c. ABS welding 325
 - d. Plastic cement welding 250



- e. Adhesive primer for plastic 550
 - f. Contact Adhesive 80
 - g. Special Purpose Contact Adhesive 250
 - h. Structural Wood Member Adhesive 140
 - i. Sheet Applied Rubber Lining Operations 850
 - j. Top and Trim Adhesive 250
3. Substrate Specific Applications:
- a. Metal to metal 30
 - b. Plastic foams 50
 - c. Porous material (except wood) 50
 - d. Wood 30
 - e. Fiberglass 80
4. Aerosol Adhesives:
- a. General purpose mist spray 65% VOC's by weight
 - b. General purpose web spray 55% VOC's by weight
 - c. Special purpose aerosol adhesives (all types) 70% VOC's by weight

1.9 VOC REQUIREMENTS FOR INTERIOR SEALANTS:

- A. The volatile organic compound (VOC) content of sealants, or sealant primers used in this project shall not exceed the limits defined in Rule 1168 – “Adhesive and Sealant Applications” of the South Coast Air Quality Management District (SCAQMD), of the State of California.
- B. The VOC limits defined by SCAQMD are as follows. All VOC limits are defined in grams per liter, less water and less exempt compounds.
1. Sealants:
- a. Architectural 250
 - b. Non-membrane roof 300
 - c. Roadway 250
 - d. Single-ply roof membrane 450
 - e. Other 420
2. Sealant Primer:
- a. Architectural – Nonporous 250
 - b. Architectural – Porous 775
 - c. Other 750

1.10 VOC REQUIREMENTS FOR INTERIOR PAINTS:

- A. Paints and Primers: Paints and primers used in non-specialized interior applications (i.e., for wallboard, plaster, wood, metal doors and frames, etc.) shall meet the VOC limitations of the Green Seal Paint Standard GS-11, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:
5. Volatile Organic Compounds:
- a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.
- Interior Paints and Primers:
 Non-flat: 150 g/l
 Flat: 50 g/l
 The calculation of VOC shall exclude water and tinting color added at the point of sale.



B. Anti-Corrosive and Anti-Rust Paints: Anti-corrosive and anti-rust paints applied to interior ferrous metal substrates shall meet the VOC limitations of the Green Seal Paint Standard GC-03, of Green Seal, Inc., Washington, DC. Product-specific environmental requirements are as follows:

1. Volatile Organic Compounds:

a. The VOC concentrations (in grams per liter) of the product shall not exceed those listed below as determined by U. S. Environmental Protection Agency (EPA) Reference Test Method 24.

Anti-Corrosive and Anti-Rust Paints: 250 g/l

The calculation of VOC shall exclude water and tinting color added at the point of sale.

1.11 VOC REQUIREMENTS FOR INTERIOR COATINGS:

A. Clear wood finishes, floor coatings, stains, sealers, and shellacs applied to the interior shall meet the VOC limitations defined in Rule 1113, "Architectural Coatings" of SCAQMD, of the State of California. The VOC limits defined by SCAQMD, based on 7/9/04 amendments, are as follows. VOC limits are defined in grams per liter, less water and less exempt compounds.

- 1. Clear Wood Finishes:
 - a. Varnish 350
 - b. Sanding Sealers 350
 - c. Lacquer 550
- 2. Shellac:
 - a. Clear 730
 - b. Pigmented 550
- 3. Stains 250
- 4. Floor Coatings 100
- 5. Waterproofing Sealers 250
- 6. Sanding Sealers 275
- 7. Other Sealers 200

The calculation of VOC shall exclude water and tinting color added at the point of sale.

1.12 SUBMITTALS:

A. Submit Material Safety Data Sheets, for all applicable products in accordance with Section 01 33 00, SUBMITTAL PROCEDURES. Applicable products include, but are not limited to adhesives, sealants, carpets, paints and coatings. Material Safety Data Sheets shall indicate the Volatile Organic Compound (VOC) limits of products submitted. (If an MSDS does not include a product's VOC limits, then product data sheets, manufacturer literature, or a letter of certification from the manufacturer can be submitted in addition to the MSDS to indicate the VOC limits).

B. Submit Environmental Building Materials Certification Form (EBMCF) as referenced in Section 01 81 13 SUSTAINABLE REQUIREMENTS FOR LEED BUILDINGS: For each field-applied adhesive, sealant, paint, and coating product, provide the VOC requirement, as provided in this Specification, for the relevant material category indicated on the documentation noted above.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 13.13



**SECTION 01 81 19
INDOOR AIR QUALITY REQUIREMENTS FOR LEED BUILDINGS**

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 81 19

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].

1.2 CONSTRUCTION IAQ MANAGEMENT GOALS FOR THE PROJECT:

- A. The City of New York has determined that this Project shall minimize the detrimental impacts on Indoor Air Quality (IAQ) resulting from construction activities. Factors that contaminate indoor air, such as dust entering HVAC systems and ductwork, improper storage of materials on-site, poor housekeeping, shall be minimized.

1.3 RELATED SECTIONS:

- A. All sections of the Specifications related to interior construction, MEP systems, and items affecting indoor air quality.
- B. Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS
- C. Section 01 81 13.13, VOLATILE ORGANIC COMPOUND (VOC) LIMITS FOR ADHESIVES, SEALANTS, PAINTS AND COATINGS.
- D. Division 9 (of the Specifications): Finishes.

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.
- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Volatile Organic Compounds (VOC's): Chemical compounds common in and emitted by many building products, including solvents in paints, coatings, adhesives and sealants, wood preservatives, composite wood binder, and foam insulations. Not all VOC's are harmful, but many of those contained within building products contribute to the formation of smog and may irritate building occupants by their smell and/or health impact.



- D. Materials that act as “sinks” for VOC contamination: Absorptive materials, typically dry and soft materials (such as textiles, carpeting, acoustical ceiling tiles and gypsum board) that readily absorb VOC’s emitted by “source” materials and release them over a prolonged period of time.
- E. Materials that act as “sources” for VOC contamination: Products with high VOC contents that emit VOC’s either rapidly during application and curing (typically “wet” products, such as paints, sealants, adhesives, caulks and sealers) or over a prolonged period (typically “dry” products such as flooring coverings with plasticizers and engineered wood with formaldehyde).

1.5 REFERENCES, RESOURCES:

- A. “IAQ Guidelines for Occupied Buildings Under Construction”, First Edition, November 1995, The Sheet Metal and Air Conditioner Contractors National Association (SMACNA). (703) 803-2980, www.smacna.org.
- B. ANSI/ASHRAE 52.2-1999, “Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size”, www.ashrae.org

1.6 LEED BUILDING GENERAL REQUIREMENTS:

- A. Implement practices and procedures as necessary to meet the project’s environmental performance goals as set forth in the specific requirements of this section. Specific project goals that may impact this area of work include: use of recycled-content materials; use of low-emitting materials; construction waste recycling; and the implementation of a construction indoor air quality management plan. Ensure that the requirements related to these goals, as defined in this Section, are implemented to the fullest extent. Substitutions or other changes to the work shall not be allowed if such changes compromise the stated LEED BUILDING Performance Criteria.

1.7 CONSTRUCTION IAQ MANAGEMENT PLAN:

- A. The Contractor shall prepare and implement a Construction IAQ Management Plan in coordination with each subcontractor and submit the IAQ Management Plan to the Commissioner for approval in accordance with Section 01 33 00, SUBMITTAL PROCEDURE. The Construction IAQ Management Plan shall meet the following criteria:
 - 1. Construction activities shall be planned to meet or exceed the minimum requirements of the Sheet Metal and Air Conditioning National Contractors’ Association (SMACNA) “IAQ Guidelines for Occupied Buildings Under Construction”, Third Edition, 2007.
 - 2. Absorptive materials shall be protected from moisture damage when stored on-site and after installation.
 - 3. If air handlers are to be used during construction, filtration media with a Minimum Efficiency Reporting Value (MERV) of 8 must be used at each return air grill, as determined by ASHRAE 52.2-1999.
 - 4. Filtration media shall be replaced immediately prior to occupancy. Filtration media shall have a Minimum Efficiency Reporting Value (MERV) of 13 as determined by ASHRAE 52.2-1999 if the project is pursuing Indoor Air Quality Credit 5: Indoor Chemical Pollutant Source Control.
 - 5. A “Sequence of Finish Installation Plan” shall be developed, highlighting measures to reduce the absorption of VOCs by materials that act as “sinks”.
 - 6. Upon approval of the Plan by the Commissioner, it shall be implemented by the Contractor through the duration of the construction process, and documented in accordance with the Submittal Requirements of Sub-Section 1.8 herein.
- B. Further description of the Construction IAQ Management Plan requirements is as follows:



1. SMACNA Guidelines: Chapter 3 of the referenced "IAQ Guidelines for Occupied Buildings Under Construction", outline IAQ measures in five categories as listed below. The Construction IAQ Management Plan shall be organized in accordance with the SMACNA format, and shall address measures to be implemented in each of the five categories (including subsections). All subsections shall be listed in the Plan; items that are not applicable for this project should be listed as such.
 - a. HVAC Protection
 - 1) Protect air handling and distribution equipment and air supply and return ducting during construction.
 - 2) All ductwork arriving on site will be sealed with plastic sheeting and stored on pallets or dunnage until installed.
 - 3) Cover and protect all exposed air inlets and outlets, openings, grilles, ducts, plenums, etc. to prevent water, moisture, dust and other contaminant intrusion.
 - 4) Apply protection immediately after ducting.
 - 5) Protect ducting runs at the end of day's work.
 - 6) Inspect temporary filtration weekly and replace as required to maintain the proper ventilation rates in the building.
 - b. Source Control
 - 1) Protect stored on-site or installed absorptive or porous materials.
 - 2) Do not use wet or damaged porous materials in the building.
 - 3) Recover, isolate, and ventilate containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications.
 - 4) Exhaust fumes from idling vehicles and gasoline fueled tools through use of funnels or temporary piping.
 - 5) Containers housing toxic materials and materials with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, shall be closed when not in use.
 - c. Pathway Interruption
 - 1) Depressurize work areas to contain dust and odors.
 - 2) Pressurize occupied spaces to prevent intrusion of dust and odors.
 - 3) Erect barriers to contain construction areas.
 - 4) Relocate pollutant sources.
 - 5) Temporarily seal the building and provide 100% outside air for ventilation.
 - d. Housekeeping
 - 1) Store materials on elevated platforms under cover, in a designated dry, clean location, prior to unpacking for installation.
 - 2) If materials are not stored in an enclosed location, cover tops and sides of material with waterproof sheeting, securely tied.
 - 3) Institute cleaning activities to remove contaminants from the building prior to occupancy. Clean all coils, air filters, and ductwork prior to performing testing, adjusting, and balancing of HVAC systems.
 - 4) Sweep the work area on a daily basis. Use an efficient and effective dust collecting method such as damp cloth, wet mop, or vacuum with particulate filters. Activities which produce high levels of dust shall be cleaned up immediately upon completion.
 - 5) Spills or excess applications of products containing solvents, or with VOC levels above the limits for interior adhesives, sealants, paints, and coatings described in these Specifications, must be removed immediately.
 - 6) Dust all walls prior to application of finishes.
 - 7) Vacuum all stud tracks prior to application of insulation.
 - 8) Materials which become contaminated through direct exposure to moisture from precipitation, plumbing leaks, or condensation shall be replaced by the Contractor.
 - e. Scheduling
 - 1) Phase construction such that absorptive materials are installed only in areas that are



- weathertight.
- 2) Schedule activities that utilize “sources” of VOC contamination to take place prior to installing high absorbent materials that will act as “sinks” for contaminants.
 - 3) Review of the appropriate components of the Construction IAQ Management Plan shall be a regular action topic at weekly site coordination meetings. Implementation of the Plan shall be documented in the meeting minutes.
2. Protection of Materials from Moisture Damage: As part of the “Housekeeping” section of the Construction IAQ Management Plan, measures to prevent installed materials or material stored on-site from moisture damage shall be described. This section should also describe measures to be taken if moisture damage does occur to absorptive materials during the course of construction.
 3. Replacement of Filtration Media: Under the “HVAC Protection” section of the Construction IAQ Management Plan, a description of the filtration media in all ventilation equipment shall be provided. The description shall include replacement criteria for filtration media during construction, and confirmation of filtration media replacement for all equipment immediately prior to occupancy.
 4. Sequence of Finish Installation for Materials: Where feasible, absorptive materials shall be installed after the installation of materials or finishes which have high short-term emissions of VOC’s, formaldehyde, particulates, or other air-borne compounds. Absorptive materials include, but are not limited to: carpets; acoustical ceiling panels; fabric wall coverings; insulations (exposed to the airstream); upholstered furnishings; and other woven, fibrous or porous materials. Materials with high short-term emissions include, but are not limited to: adhesives, sealants and glazing compounds (specifically those with petrochemical vehicles or carriers); paints, wood preservatives and finishes; control and/or expansion joint fillers; hard finishes requiring adhesive installation; gypsum board (with associated finish processes and products); and composite or engineered wood products with formaldehyde binders.
 5. Develop and implement an Indoor Air Quality (IAQ) Management Plan for the pre-occupancy phase as follows:

OPTION 1 — Flush-Out

- After construction ends, prior to occupancy and with all interior finishes installed, perform a building flush-out by supplying a total air volume of 14,000 cu.ft. of outdoor air per sq.ft. of floor area while maintaining an internal temperature of at least 60 degrees F and relative humidity no higher than 60%.

OR

- If occupancy is desired prior to completion of the flush-out, the space may be occupied following delivery of a minimum of 3,500 cu.ft. of outdoor air per sq.ft. of floor area to the space. Once a space is occupied, it shall be ventilated at a minimum rate of 0.30 cfm/sq.ft. of outside air or the design minimum outside air rate determined in EQ Prerequisite 1, whichever is greater. During each day of the flush-out period, ventilation shall begin a minimum of three hours prior to occupancy and continue during occupancy. These conditions shall be maintained until a total of 14,000 cu.ft./sq.ft. of outside air has been delivered to the space.

OR

OPTION 2 — Air Testing

- Conduct baseline IAQ testing, after construction ends and prior to occupancy, using testing protocols consistent with the United States Environmental Protection Agency Compendium of

Methods for the Determination of Air Pollutants in Indoor Air and as additionally detailed in the LEED-NC Reference Guide.

- Demonstrate that the contaminant maximum concentrations listed below are not exceeded.

CONTAMINANT	MAXIMUM CONCENTRATION
Formaldehyde	27 parts per billion
Particulates (PM10)	50 micrograms per cubic meter
Total Volatile Organic Compounds (TVOC)	500 micrograms per cubic meter
* 4-Phenylcyclohexene (4-PCH)	6.5 micrograms per cubic meter
Carbon Monoxide (CO)	9 part per million and no greater than 2 parts per million above outdoor levels
* This test is only required if carpets and fabrics with styrene butadiene rubber (SBR) latex backing material are installed as part of the base building systems.	

- For each sampling point where the maximum concentration limits are exceeded, conduct additional flush-out with outside air and retest the specific parameter(s) exceeded to indicate the requirements are achieved. Repeat procedure until all requirements have been met. When retesting non-complying building areas, take samples from the same locations as in the first test.

- The air sample testing shall be conducted as follows:

- a. All measurements shall be conducted prior to occupancy, but during normal occupied hours and with the building ventilation system starting at the normal daily start time and operated at the minimum outside air flow rate for the occupied mode throughout the duration of the air testing.
 - b. The building shall have all interior finishes installed, including but not limited to millwork, doors, paint, carpet and acoustic tiles. Non-fixed furnishings such as workstations and partitions are encouraged, but not required, to be in place for the testing.
 - c. The number of sampling locations will vary depending upon the size of the building and number of ventilation systems. For each portion of the building served by a separate ventilation system, the number of sampling points shall not be less than one per 25,000 sq.ft., or for each contiguous floor area, whichever is larger, and include areas with the least ventilation and greatest presumed source strength.
 - d. Air samples shall be collected between 3 feet and 6 feet from the floor to represent the breathing zone of occupants, and over a minimum 4-hour period.
6. Implementation and Coordination: Implement the Construction IAQ Management Plan, and coordinate the Plan with all affected trades. Designate one individual as the Construction IAQ Representative at no additional cost to the City of New York, who will be responsible for communicating the progress of the Plan with the Commissioner on a regular basis, and for assembling the required LEED documentation. Include provisions in the Construction IAQ Management Plan for addressing conditions in the field that do not adhere to the Plan, including provisions to implement a stop work order, or to rectify non-compliant conditions.
- a. Distribution: The Contractor shall distribute copies of the Construction IAQ Management Plan in accordance with Section 01 33 00, SUBMITTAL PROCEDURES.
 - b. Instruction: The Contractor shall provide on-site instruction of appropriate site management to all Contractor's Subcontractors.



- c. Monitoring: The Construction IAQ Representative shall monitor the implementation of the Construction IAQ Management Plan.

1.8 SUBMITTALS:

Submit the following LEED-required records and documents in accordance with Section 01 33 00, SUBMITTAL PROCEDURES and Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS.

- A. A copy of the Construction IAQ Management Plan as defined in Sub-Section 1.7 herein.
- B. Product cut-sheets for all filtration media used during construction and installed immediately prior to occupancy, with MERV values highlighted. Cut sheets shall be submitted with the Contractor's or Subcontractor's 'approved' stamp as confirmation that the products are the products installed on the project.
- C. Provide the Commissioner with a minimum of 18 photographs as required under the provision for Special Photographs, in accordance with Section 01 32 33, PHOTOGRAPHIC DOCUMENTATION, comprised of at least six photographs taken on three different occasions during construction. The photographs shall document the implementation of the Construction IAQ Management Plan throughout the course of the project construction. Examples include photographs of ductwork sealing and protection, temporary ventilation measures, and conditions of on-site materials storage (to prevent moisture damage). Photographs shall include integral date stamping, and shall be submitted with brief descriptions of the Construction IAQ Management Plan measure documented, or be referenced to project meeting minutes or similar project documents which reference to the Construction IAQ Management Plan measure documented.
- D. A copy of the project's TAQ Testing report if applicable.

1.9 QUALITY ASSURANCE:

- A. The Contractor shall be responsible for preparing and implementing the Construction IAQ Management Plan and shall coordinate and incorporate the work of its subcontractors in the IAQ Management Plan.
- B. Responsibility of Subcontractors: Subcontractors for this project shall be responsible to cooperate with the Contractor in the preparation and implementation of the Construction IAQ Management Plan.

PART II – PRODUCTS (Not Used)

PART III – EXECUTION (Not Used)

END OF SECTION 01 81 19

SECTION 01 91 13
GENERAL COMMISSIONING REQUIREMENTS

REFER TO THE ADDENDUM FOR APPLICABILITY OF THIS SECTION 01 91 13

PART I – GENERAL

1.1 RELATED DOCUMENTS:

- A. The following documents apply to all required work for the Project: (1) the Contract Drawings, (2) the Specifications, (3) the General Conditions, (4) the Addendum, and (5) the Contract [City of New York Standard Construction Contract].
- B. OPR and BoD documentation are included by reference for information only.
- C. The Commissioning Plan, prepared by the Commissioning Agent (CxA) under separate contract with the City of New York, contains requirements that apply to this section.

1.2 SUMMARY:

- A. This Section includes general requirements that apply to implementation of Commissioning without regard to systems, subsystems, and equipment being commissioned.
- B. This Section includes:
 - 1. Definitions
 - 2. Commissioning Team
 - 3. City's Responsibilities
 - 4. Each Contractor's Responsibilities
 - 5. Commissioning Authority's/Agent's (CxA) Responsibilities
 - 6. Commissioning Documentation
 - 7. Submittals
 - 8. Coordination

1.3 RELATED SECTIONS: Include without limitation the following:

- A. "HVAC Commissioning Requirements" indicated in other sections of the project specifications for specific requirements for commissioning HVAC systems.
- B. This project will be commissioned by an independent third party under separate contract with the City of New York. Commissioning shall be in accordance with ASHRAE and USGBC LEED procedures, and specific commissioning requirements of the Project Specifications, whichever is more stringent. The Contractor shall cooperate with the CxA and provide whatever assistance is required.
- C. Related Sections include without limitation the following:
 - 1. Section 01 10 00 SUMMARY
 - 2. Section 01 31 00 PROJECT MANAGEMENT AND COORDINATION
 - 3. Section 01 32 00 CONSTRUCTION PROGRESS DOCUMENTATION
 - 4. Section 01 78 39 CONTRACT RECORD DOCUMENTS
 - 5. Section 01 79 00 DEMONSTRATION AND TRAINING
 - 6. Section 01 81 13 SUSTAINABLE DESIGN REQUIREMENTS FOR LEED BUILDINGS

1.4 DEFINITIONS:

- A. Refer to Article 2 of the Contract for definition of terms, words and expressions used in the General Conditions not otherwise defined herein.



- B. Design Consultant: "Design Consultant" shall mean the entity responsible for providing design services for the Project, including without limitation, preparing the construction documents (drawings and specifications) and providing services in connection with such documents during construction. The entity serving as the "Design Consultant" may be a corporation, firm, partnership, joint venture, individual or combination thereof. Such entity may be either an employee(s) of the City or an entity engaged by the City to provide such services.
- C. Commissioner: The Commissioner of the Department of Design and Construction of the City of New York, his/her successors, or duly authorized representative(s).
- D. BoD: Basis of Design: A document, prepared by the Consultant Architect/Engineer, that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that support the design process.
- E. Commissioning Plan: A document that outlines the organization, schedule, allocation of resources, and documentation requirements of the commissioning process.
- F. CxA: Commissioning Agent (Aka Commissioning Authority) under separate contract with the City of New York to provide Commissioning Services for this project.
- G. OPR: Owner's (City of New York) Project Requirements: A document, prepared by the Consulting Architect/Engineer that details the functional requirements of a project and the expectations of how it will be used and operated. These include Project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.
- H. Systems, Subsystems, Equipment, and Components: Where these terms are used together or separately, they shall mean "as-built" systems, subsystems, equipment, and components.
- I. TAB: Testing, Adjusting, and Balancing.

1.5 COMMISSIONING TEAM:

- A. Members Appointed by the Contractor and its Subcontractors: Individuals, each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions. The Commissioning Team shall consist of, but not be limited to, representatives of the Contractor, including Project superintendent and subcontractors, installers, suppliers, and specialists deemed appropriate by the CxA.
- B. Members Appointed by the City:
 - 1. Commissioning Authority/Agent (CxA): The designated person, company, or entity under separate contract with the City that plans, schedules, and coordinates the commissioning team to implement the commissioning process.
 - 2. Representatives of the facility user and operation and maintenance personnel.
 - 3. Consultant Architect/Engineer and other concerned entities.

1.6 CITY'S RESPONSIBILITIES:

- A. Provide the OPR documentation to the Commissioning Agent (CxA) for use in developing the commissioning plan; systems manual; operation and maintenance training plan; and testing plans and checklists.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities.

- C. Provide the BoD documents, prepared by the Consulting Architect/Engineer and approved by the Commissioner, to the Commissioning Agent (CxA) for use in developing the commissioning plan, systems manual, and operation and maintenance training plan.

1.7 CONTRACTOR'S RESPONSIBILITIES:

- A. The Contractor shall provide utility services required for the commissioning process.
- B. As a member of the Commissioning Team, the Contractor and subcontractor(s) shall assign representatives with expertise and authority to act on behalf of the Contractor and its subcontractor(s) and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
 - 1. Participate in scheduled construction-phase coordination and commissioning team meetings.
 - 2. Integrate and coordinate commissioning process activities with the construction schedule.
 - 3. Review and accept commissioning process test procedures provided by the CxA.
 - 4. Review and accept construction checklists provided by the CxA.
 - 5. Perform testing required in the Commissioning Schedule as per the Commissioning Process test procedures provided by the CxA.
 - 6. Complete installation checklists as Work is completed and return to CxA through the Resident Engineer.
 - 7. Cooperate with the CxA for resolution of issues recorded in the Issues Log.
 - 8. Evaluate performance deficiencies identified in test reports and, in collaboration with entity responsible for system and equipment installation, recommend corrective action.
 - 9. Submit As-Built documents, operation and maintenance manuals for systems and subsystems, and equipment in accordance with Section 01 78 39, CONTRACT RECORD DOCUMENTS.
 - 10. Provide orientation sessions for operation and maintenance personnel (sessions will be video recorded by the CxA) in accordance with Section 01 79 00, DEMONSTRATION AND OWNER'S PRE-ACCEPTANCE ORIENTATION.

1.8 COMMISSIONING AGENT'S (CxA) RESPONSIBILITIES:

- A. Organize and lead the commissioning team.
- B. Prepare a construction-phase commissioning plan. Collaborate through the Resident Engineer with each Contractor and with subcontractors to develop test and inspection procedures. Include design changes and coordinate commissioning activities with the overall Project schedule. Identify commissioning team member responsibilities, by name, firm, and trade specialty, for performance of each commissioning task.
- C. Review and comment in accordance with Section 01 33 00, SUBMITTAL PROCEDURES, on submittals from the Contractor for compliance with the OPR, BoD, Contract Documents, and construction-phase commissioning plan. Review and comment on performance expectations of systems and equipment and interface between systems relating to the OPR and BoD.
- D. Coordinate with the Resident Engineer to convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss progress of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent (CxA) will prepare and distribute minutes to commissioning team members and attendees within three workdays of the commissioning meeting.
- E. At the beginning of the construction phase, coordinate with the Resident Engineer's kick-off meeting schedule to conduct an initial construction-phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals, operation and maintenance training sessions, TAB Work, and Project completion.



- F. Observe and inspect construction. Report progress and deficiencies to the Commissioner. In addition to compliance with the OPR, BoD, and Contract Documents, inspect systems and equipment installation for adequate accessibility required for component maintenance replacement and repair.
- G. Prepare Project-specific test and inspection procedures and checklists.
- H. Coordinate with the Resident Engineer to schedule, direct, witness, and document tests, inspections, and systems startup.
- I. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.
- J. Certify date of acceptance and startup for each item of equipment for start of warranty periods.
- K. Review and comment on operation and maintenance documentation and systems manual outline for compliance with the OPR, BoD, and Contract Documents. Operation and maintenance documentation requirements are specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS.
- L. Record and edit demonstration and orientation sessions on DVD.
- M. Prepare commissioning reports.
- N. Assemble the final commissioning documentation, including the commissioning report and Systems Manual.

1.9 COMMISSIONING DOCUMENTATION:

The Contractor shall assist the Commissioning Agent (CxA) in the development and compiling of the following Commissioning Documentation:

- A. Index of Commissioning Documents: The Commissioning Agent (CxA) will prepare an index including the storage location of each document.
- B. OPR: A written document prepared by the Consulting Architect/Engineer that details the functional requirements of the Project and expectations of how it will be used and operated. This document includes the Project and design goals, measurable performance criteria, budgets, schedules, success criteria, and supporting information.
- C. BoD Document: A document prepared by the Consulting Architect/Engineer that records concepts, calculations, decisions, and product selections used to meet the OPR and to satisfy applicable regulatory requirements, standards, and guidelines. The document includes both narrative descriptions and lists of individual items that explain the designed systems.
- D. Commissioning Plan: A document prepared by the Commissioning Agent (CxA) that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process.
- E. Test Checklists: The Commissioning Agent (CxA) will develop test checklists for each system, subsystem, or equipment including interfaces and interlocks, and include a separate entry, with space for comments, for each item to be tested. The CxA will prepare separate checklists for each mode of operation and provide space to indicate whether the mode under test responded as required. Space will be provided for testing personnel to sign off on each checklist. Specific checklist content requirements are specified in other sections of the project specifications.
- F. Inspection Checklists will be signed by the Contractor, Subcontractor(s), Installer(s), and CxA certifying that systems, subsystems, equipment, and associated controls are ready for testing.
- G. Test and Inspection Reports: The Commissioning Agent (CxA) will record test data, observations, and measurements on test checklists. Photographs, forms, and other means appropriate for the application will be included with data. CxA shall compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

- H. Corrective Action Documents: The Commissioning Agent (CxA) will document corrective action taken for systems and equipment that fail tests and include required modifications to systems and equipment and revisions to test procedures, if any. The Contractor shall retest systems and equipment requiring corrective action. The CxA will document retest results.
- I. Issues Log: The Commissioning Agent (CxA) will prepare and maintain an issues log that describes design, installation, and performance issues that are at variance with the OPR, BoD, and Contract Documents. The log will identify and track issues as they are encountered, documenting the status of unresolved and resolved issues.
 - 1. Commissioning Report: The Commissioning Agent (CxA) will document results of the commissioning process including unresolved issues and performance of systems, subsystems, and equipment. The commissioning report will indicate whether systems, subsystems, and equipment have been completed and are performing according to the OPR, BoD, and Contract Documents.
- J. Systems Manual: The Commissioning Agent (CxA) will gather required information and compile systems manual as specified in other sections of the project specifications and described in Section 01 78 39, CONTRACT RECORD DOCUMENTS..

1.10 SUBMITTALS:

- A. Commissioning Plan Pre-final Submittal: The Commissioning Agent (CxA) will submit six (6) copies of the pre-final commissioning plan to the Commissioner for review and distribution.
- B. Commissioning Plan Final Submittal: The Commissioning Agent (CxA) will submit six (6) hard copies and electronically formatted information of the final commissioning plan to the Commissioner. The final submittal will address previous review comments.
- C. Test and Inspection Reports: CxA will submit test and inspection reports.
- D. Corrective Action Documents: CxA will submit corrective action documents.

1.11 COORDINATION:

- A. Coordinating Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer's regularly scheduled construction progress meetings to conduct coordination meetings of the commissioning team to review progress on the commissioning plan, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- B. Pre-testing Meetings: The Commissioning Agent (CxA) will coordinate with the Resident Engineer to conduct pretest meetings of the commissioning team to review startup reports, pretest inspection results, testing procedures, testing personnel and instrumentation requirements, and manufacturers' authorized service representative services for each system, subsystem, equipment, and component to be tested.
- C. Testing Coordination: The Commissioning Agent (CxA) will coordinate with the Resident Engineer the sequence of testing activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
 - 1. Coordinate schedule times with the Resident Engineer for tests, inspections, obtaining samples, and similar activities.
- D. Manufacturers' Field Services: The Commissioning Agent (CxA) will coordinate services of manufacturers' field services.

PART II – PRODUCTS (Not Used)



PART III – EXECUTION

3.1 OPERATION & MAINTENANCE MANUALS

A. General

1. The CxA shall review the Operation & Maintenance manuals provided by the Contractor or subcontractors for completeness of the document. The review process shall verify that Operation & Maintenance instructions meet specifications and are included for all commissioned equipment furnished by the Contractor.
2. Published literature shall be specifically oriented to the provided equipment, indicating required operation and maintenance procedures, parts lists, assembly / disassembly diagrams and related information.
3. The Contractor shall incorporate the standard technical literature into system specific formats for this facility as designed and as actually installed. The resulting Operation & Maintenance information shall be system specific, concise, to the point and tailored specifically to this facility. The CxA shall review these documents as necessary for final corrections by the Contractor.

B. The Operation & Maintenance Manual review and coordination efforts shall be completed prior to Owner orientation sessions, as these documents are to be utilized in the training sessions.

C. System Operations Manual

1. The CxA shall prepare and deliver these documents with inputs from other agencies. The contractors will confirm the proper documents are onsite and readily available. Typically, the manual includes the following:
 - a. Commissioned systems single line diagrams (Mechanical, Electrical, Plumbing, and Building Management System (BMS) subcontractors).
 - b. As built sequences of operations, control drawings and original set points (Design Consultant and BMS subcontractor)
 - c. Operating instructions for integrated building systems (mechanical and BMS subcontractors).
 - d. Recommended schedule of maintenance requirements and frequency (subcontractors).
 - e. Recommended schedule for calibrating sensors and actuators (BMS subcontractor)

3.2 DEMONSTRATION AND INSTRUCTION

- A. The Contractor shall schedule and coordinate instruction sessions for the facility's staff for each commissioned system. Demonstrations shall be held per Contract Documents, along with the appropriate schematics, handouts and visual / audio training aids onsite with equipment.
- B. The equipment vendors shall provide instruction on the specifics of each major equipment item including philosophy, troubleshooting and repair techniques.
- C. For additional prescription pertinent to instruction, refer to other specific divisions for demonstration and instruction requirements.

3.3 WARRANTY REVIEW / SEASONAL TESTING

- A. The CxA will return upon the start of the new season (cooling or heating) after project completion to conduct performance tests that could not be performed due to ambient conditions. The seasonal testing will only be performed if unsuitable loads / conditions were unavailable during the performance testing stages (in other words; the requirement for testing is warranted).
- B. If agreed upon by facility, Seasonal Testing can also be used for the Warranty Review. During which the CxA will interview the occupants, maintenance staff, review the operation of the building, provide recommendations for installation and operational problems and document warranty and operational issues in the issues database.



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

3.4 RECORD DRAWINGS

- A. The CxA shall review the as built contract documents to verify incorporation of both design changes and as built construction details. Discrepancies noted shall be corrected by the appropriate party.

END OF SECTION 01 91 13



NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

Division 01 – DDC STANDARD GENERAL CONDITIONS
SINGLE CONTRACT PROJECTS
Issue Date - June 01, 2013

No Text





**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary

Contractor

Dated _____, 20____

Approved as to Form
Certified as to Legal Authority


Acting Corporation Counsel

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated _____, 20____





FMS ID: PV467-STG



**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION

**St. George Theater Stage Rigging
Replacement**

**LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK**

Contractor

Dated _____, 20____

Approved as to Form
Certified as to Legal Authority

Acting Corporation Counsel

Dated May 19, 2014

Entered in the Comptroller's Office

First Assistant Bookkeeper

Dated _____, 20____

5-19-14
JP





PROJECT ID: PV467-STG

**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE
LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000
WEBSITE www.nyc.gov/buildnyc

VOLUME 3 OF 3

**ADDENDUM TO THE GENERAL
CONDITIONS**

SPECIFICATIONS

FOR FURNISHING ALL LABOR AND MATERIALS
NECESSARY AND REQUIRED FOR:

**St. George Theater Stage Rigging
Replacement**

LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK

CONTRACT NO. 1 GENERAL CONSTRUCTION

Department of Cultural Affairs

Wallance + Hibbs Architects

Date: April 17, 2014



14-114





NEW YORK CITY DEPARTMENT OF
DESIGN + CONSTRUCTION

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

ADDENDUM TO THE GENERAL CONDITIONS
FOR SINGLE CONTRACT PROJECTS

The General Conditions are hereby amended in accordance
with the terms and conditions set forth in this Addendum.

I. PROJECT DESCRIPTION

FMS #: PV467-STG

PROJECT NAME: St. George Theatre Stage Rigging Replacement

PROJECT DESCRIPTION: This Project consists of removal and replacement of the existing stage rigging system, including structural reinforcement and partial replacement of the existing stage gridiron and roof structure; replacement of the rigging loading gallery; and a new ship's ladder for access from the stage floor to the gridiron. Work also includes removal and replacement of branch sprinkler piping at the gridiron, and new work lighting.

PROJECT LOCATION: 35 Hyatt Street
BOROUGH: Staten Island
CITY OF NEW YORK
ZIP CODE: 10301
COMMUNITY BOARD #: 1

LANDMARK STATUS:

DESIGNATED LANDMARK STRUCTURE OR SITE: NO

If this is a Designated Landmark Structure or Site, Section 01 3591, Historic Treatment Procedures applies to this project.

LANDMARK QUALITY STRUCTURE: NO

If this is a Landmark Quality Structure, Section 01 3591, Historic Treatment Procedures applies to this project.

II. LEED GREEN BUILDING REQUIREMENTS

NOT USED

III. COMMISSIONING REQUIREMENTS

NOT USED

IV. PROJECT MANAGEMENT

- DDC shall publicly bid and enter into all contracts for the Project. DDC shall manage the Project using its own personnel.
- DDC shall publicly bid and enter into all contracts for the Project. A Construction Management firm (the "CM") hired by DDC shall manage the Project. The Contractor is advised that the CM shall serve as the representative of the Commissioner at the site and shall, subject to review by the Commissioner, be responsible for the inspection, management, coordination and administration of the required construction work, as delineated in the article of the Standard Construction Contract entitled "The Resident Engineer".

V. CONTRACTS FOR THE PROJECT

The Project consists of a single contract, the Contract for General Construction Work. The Contractor for General Construction Work is responsible for the performance of all required work for the Project as set forth in the Contract Documents (General Conditions, Drawings and Specifications), including all responsibilities and obligations assigned to separate Contractors for the following subdivisions of the work: Plumbing Work, HVAC Work, and Electrical Work. All responsibilities and obligations in the Contract Documents assigned to separate Contractors for such subdivisions of the work are the responsibility of the Contractor for General Construction Work.

VI. SCHEDULES

The Contractor is advised that Schedules A through F are attached to, and incorporated as part of, this Addendum to the General Conditions. These schedules contain important information that is specific to this Project. The Contractor is advised to carefully review these schedules.

VII. APPLICABILITY OF SECTIONS/SUB-SECTIONS AND AMENDED SUB-SECTIONS

The Contractor is advised that various Sections/Sub-Sections in the General Conditions may not apply to this Project or may apply as amended. Such Sections/Sub-Sections advise the Contractor to "Refer to the Addendum for the applicability of this Section/Sub-Section." Such Sections/Sub-Sections are set forth below. A check mark indicates whether the Section/Sub-Section (1) applies to the Project, (2) does not apply to the Project, or (3) applies to the Project as amended. If no box is checked, the Section/Sub-Section, as set forth in the General Conditions, applies to the Project. Amended Sections/Sub-Sections, if any, are set forth following this list of Sections.

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 1000	1.4 (B)	Scope and Intent / LEED		X	
	1.4(C)	Scope and Intent / Commissioning		X	
01 3233		Photographic Documentation	X		
01 3300	1.7 (A-D)	LEED Submittals		X	
01 3503		General Mechanical Requirements	X		
01 3506	3.2 (A-B)	Electrical Conduit System Including Boxes (Pull, Junction and Outlet)	X		
	3.3 (A-E)	Electrical Wiring Devices	X		
	3.4 (A-I)	Electrical Conductors and Terminations	X		
	3.5 (A-B)	Circuit Protective Devices	X		
	3.6 (A-J)	Distribution Centers		X	
	3.7 (A-I)	Motors		X	
	3.8 (A-I)	Motor Control Equipment	X		
01 3591		Historic Treatment Procedures		X	
01 5000	3.2 (A)	Temporary Water Facilities / Temporary Water		X	
	3.2 (B)	Temporary Water Facilities / Temporary Water – Work in Existing Facilities		X	
	3.3 (B)	Temporary Sanitary Facilities / Self-Contained Toilet Units		X	
	3.3 (C)	Temporary Sanitary Facilities / Existing Toilets	X		
	3.4 (B) 1	Temporary Power, Lighting, and Site Lighting / Connection to Utility Lines		X	

<u>Section</u>	<u>Sub-Section</u>	<u>Sub-Section</u>	<u>Applies</u>	<u>Does not Apply</u>	<u>Applies as Amended</u>
01 5000	3.4 (B) 2	Temporary Power, Lighting, and Site Lighting / Connection to Existing Electrical Power Service			X
	3.4 (B) 3	Temporary Power, Lighting, and Site Lighting / Electrical Generator Power Service		X	
	3.4 (D)	Temporary Power, Lighting, and Site Lighting / Temporary Lighting	X		
	3.4 (E)	Temporary Power, Lighting, and Site Lighting / Site Security Lighting (for New Construction Only)		X	
	3.5 (A-J)	Temporary Heat	X		
	3.8 (A)	DDC Field Office / Office Space in Existing Building	X		
	3.8 (B)	DDC Field Office / DDC Field Office Trailer		X	
	3.8 (B-3a)	DDC Field Office / DDC Managed Field Office Trailer		X	
	3.8 (B-3b)	DDC Field Office / CM Managed Field Office Trailer		X	
	3.8 (D)	DDC Field Office / Additional Equipment for the DDC Field Office		X	
	3.13(A-D)	Work Fence Enclosure		X	
	3.17(B)	Project Rendering		X	
	3.18 (A-C)	Security Guards / Fire Guards on Site		X	
01 5411	3.1 (A-J)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Up To and Including 15 Stories		X	
	3.2 (A-M)	Temporary Use, Operation and Maintenance of Elevators During Construction for New Buildings Over 15 Stories		X	
	3.3 (A-E)	Temporary Use, Operation and Maintenance of Elevators During Construction for Existing Buildings	X		
01 7300	3.3 (A-I)	Surveys		X	
	3.4 (A-B)	Borings		X	
	3.12 (A-D)	Sleeves and Hangers	X		
	3.13 (A)	Sleeve and Penetration Drawings		X	
	3.15 (A)	Location of Partitions		X	
01 7419	1.5 (C)	Waste Management Performance Requirements / LEED Certification		X	
01 7900		Demonstration and Owner's Pre-Acceptance Orientation	X		
	3.2 (A)	Non-Commissioned Projects	X		
	3.2 (B)	Commissioned Projects		X	
01 8113		Sustainable Design Requirements for LEED Buildings		X	
01 8113.13		VOC Limits for Adhesives, Sealants, Paints and Coatings for LEED Buildings		X	
01 8119		Indoor Air Quality Requirements for LEED Buildings		X	
01 9113		General Commissioning Requirements		X	

AMENDED SECTIONS/SUB-SECTIONS

Section 01 50 00 Temporary Facilities, Service and Control-Sub Section-3.4 (D)

Utility Consumption During Construction

The Contractor may have up to 400 Amps available for use. Contractor will be made responsible for any increase in utility payments when compared to utility charges from same payment period of previous year.

ADDITIONAL SECTIONS/SUB-SECTIONS

Section 01 10 00 Summary-Sub Section 1.1 (C)

ST GEORGE THEATRE CAPITAL IMPROVEMENTS

St George Theatre Restoration Inc.'s Vision and Mission Statement:

St George Theatre Restoration Inc. is dedicated to the restoration of the historic theatre and its development as a cultural and performing arts center for Staten Island and all of New York City by providing community outreach, educational programs and public performances.

Building History

The St George Theatre opened in December 1929, equipped with air conditioning, a Wurlitzer organ and seating for 2,800. It outshone most of its competitors including Manhattan's Capitol Theatre on Broadway. From its opening, until 1972, the theatre was used as a movie house. Later incarnations included use as a roller rink, an antique showroom and a nightclub. With few exceptions, the theatre sat shuttered for approximately 30 years.

In 2004, Rosemary Cappozalo and her daughters created a nonprofit organization, Richmond Dance Ensemble, to purchase, restore and save the theatre from being condemned. Restoration projects and performances started the same year. In 2007 they changed the name to St. George Theatre Restoration Inc.

St George Theatre Contact

Note: DDC Project Manager is Fé Rodríguez Márquez; (718) 391-2484 and rodrigufe@ddc.nyc.gov. Contractor may only contact St George Theatre (ST. GEORGE THEATER) representatives if DDC Project Managers are unavailable.

St George Theatre Restoration, Inc. Telephone: (718) 442-2900 Website: www.stgeorgetheatre.com Hours: Mon – Fri 09:30 – 14:00	
Doreen Cugno <i>President and CEO</i> Email: dcugno@sgtr.org	Wayne Miller <i>Executive Director and Head of Production</i> Email: wmiller@sgtr.org

Section 01 31 00 Project Management and Coordination-Sub Section1.4 (F)

Other Active Projects

In addition to maintenance, other theatrical projects will be taking place in the building. ST. GEORGE THEATER is to coordinate schedule with the Commissioner and contractor to avoid detrimental impact on Contractor activities.

Section 01 31 00 Project Management and Coordination-Sub Section1.4 (G)

PV467-STG St George Theatre Improvements Phasing Plan

It is of utmost importance to adhere to the construction schedule. Phase 2 of the plan must be coordinated with the theatre's performance schedule and overruns will present considerable loss of revenue to the theatre. If signs of

schedule creep begin to appear, it falls upon the contractor to provide a proposal to bring the schedule back to the originally approved dates.

Please note the phasing plan outlined below does not include required ancillary work. Items listed are for general reference only. Contractor is responsible for sequencing and scheduling.

Phase 1 – Assumed Duration of 16 Weeks

Complete submittal review and approval for critical path items. Begin shop fabrication and order long lead-time items.

Phase 1A

1. Provide Safety Plan for review and approval by Commissioner
2. Identify critical path items
3. Verify field conditions, including stage floor loading capacity
4. Initiate submittal process for critical path items

Phase 1B

1. Commence fabrication of approved long lead-time items
2. Place orders for approved long lead-time items

Phase 2 – Assumed Duration of 14 Weeks

Theatre load-out of Stage, Contractor mobilization, demolition and field installation, Substantial Completion

1. Stage, Gridiron and Contractor support spaces are handed over to Contractor
2. Documentation of existing conditions
3. Protection of areas within Scope of Work
4. Removal and selective removal of rigging system, loading gallery, gridiron, ladder
5. Removal and replacement of sprinkler piping
6. Installation of steel members throughout Gridiron level
7. Installation of new loading gallery
8. Installation of new ships ladder
9. Installation of new rigging system
10. Installation of new lighting
11. Incidental masonry repair and repointing
12. Substantial Completion, releasing functional system in working order on April 3
13. Handover of areas within Scope of Work and Contractor support spaces

Phase 3 – Assumed Duration of 10 Weeks

Project Close Out

1. Site work as needed and to be coordinated with ST. GEORGE THEATER
2. Punchlist and Final Inspection
3. Project Close-out

CONTRACTOR GUIDELINES

Section 01 31 00 Project Management & Coordination-Sub Section-1.4 (H)

Site Access

Contractor personnel and vehicles may access ST. GEORGE THEATER via an exterior passageway located between no.'s 15-17 and 19 on Hyatt Street. Within ST. GEORGE THEATER, access will be limited to the Stage, Gridiron and Back of House areas where the Contractor office and restrooms are located. Other back of house and areas around the Stage, including certain areas beneath the stage will not be available to contractors unless specifically requested and on a case by case basis (i.e.: dimmer room and lighting equipment storage room).

In order to maintain egress clearance, neither materials nor vehicles may be stationed at the exterior passageway. Metered street parking is available along Hyatt Street and a public parking lot is located adjacent to ST. GEORGE THEATER at the corner of Hyatt Street and St Marks Place.

Any exceptions to the access as outlined above will be made on a case-by-case basis and with sufficient notification to

coordinate with other ST. GEORGE THEATER activities.

Direct exterior access to the Stage Left Wing is available via an exterior stage lift. Lift is manufactured by Autoquip Corporation, Model FL4M-6. **Please note this lift is not intended for passenger use; it does not meet ASME A17.1.**

Section 01 31 00 Project Management and Coordination-Sub Section-1.5 (E) 3

Contractor Employees

Contractor is required to provide names of all employees authorized to work on site. The Contractor is to provide identification badges to all authorized personnel. ID badges are to be worn at all times while at ST. GEORGE THEATER. Employees without ID badges may be refused entry to work areas. Contractor shall maintain a daily roster of all employees that will be subject to inspections by ST. GEORGE THEATER and / or the Commissioner.

Section 01 32 33 Photographic-Sub Section-1.4 (F) 2

Existing Conditions

Contractor is responsible for documenting existing conditions prior to mobilization and submitting documentation to the City of New York for review and reference prior to Project Closeout. Any damages to existing conditions are to be repaired to preconstruction conditions unless directed otherwise in writing by the Commissioner.

Section 01 35 26 Quality Requirement-Part III-Article 1.6-(F)

Stage Load Capacity

Current stage may be loaded up to 112 lbs/ft². Contractor is responsible for assessing and verifying the stage floor load capacity with an independent, licensed, engineer prior to mobilization. The Contractor is responsible for not exceeding stage floor loading and will be held responsible for any damage caused by overloading of the stage during construction.

Section 01 50 00 Temporary Facilities, Service and Control -Sub Section 3.7 (H) 4

Contractor Field Station

A dressing room for office use, restroom, and slop sink will be made available for Contractor use. These areas are located off the Stage Left Wing and accessible from the exterior passageway.

Section 01 73 00 Execution-Sub Section-3.19 (E)

General Protection Requirements

Stage and Interior Floors – Masonite and paper

Stage Lift – quilted blankets

Interior Finished Walls – ¼” plywood

Dust Control – Stage opening shall be closed with 20 mil plastic tarp. Plastic sheeting to be securely attached at plaster line to top of arch, proscenium verticals and stage apron to prevent any construction dust from reaching auditorium seating area.

Section 01 73 00 Execution-Sub Section 3.21 (F)

Staging Area & Rubbish Removal

The Stage may serve as the primary staging area. Stage floor and permanent equipment is to be protected. Staging area shall be cleaned and swept daily at the end of the workday. Work site is to be clean, well organized and as compact as possible, with particular attention to areas adjacent to front of house interiors. Rubbish shall be removed promptly. All tools and equipment shall be stored securely. Neither ST. GEORGE THEATER nor the City of New York are responsible for stolen or missing tools or materials.

Rubbish should be removed promptly, in containers supplied by Contractor. Construction debris to be removed in Contractor supplied dumpsters. All containers, dumpsters, permits, etc. at contractors sole expense. Contractor is NOT to use ST. GEORGE THEATER dumpsters under any circumstances.

VIII. SPECIAL EXPERIENCE REQUIREMENTS FOR THE PROJECT

- (1) **GENERAL:** Special Experience Requirements applicable to the contractor or subcontractor that will perform specific areas of work are set forth below.
- (2) **REVISION OF SPECIFICATIONS AND DRAWINGS:** In the event the Specifications and/or the Contract Drawings contain any Special Experience Requirement that is not set forth below, such Special Experience Requirement is deemed deleted, except as otherwise expressly provided in Section VI of this Addendum.
- (3) **SPECIAL EXPERIENCE REQUIREMENTS FOR SPECIFIC AREAS OF WORK:** The special experience requirements set forth below apply to the contractor or subcontractor that will perform specific areas of work. Compliance with such experience requirements will be evaluated after an award of contract. Within two (2) weeks of such award, the contractor will be required to submit the qualifications of the contractor or subcontractor that will perform these specific areas of work. If the contractor intends to perform these specific areas of work with its own forces, it must demonstrate compliance with the special experience requirements. If the contractor intends to subcontract these specific areas of work, the proposed subcontractor(s) must demonstrate compliance with the special experience requirements. Once approved, no substitution will be permitted, unless the qualifications of the proposed replacement have been approved in writing in advance by the City.
 - (a) **Special Experience Requirement:** The contractor or subcontractor performing the work of this section must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work. This Special Experience Requirement applies to the contractor or subcontractor that will perform specific areas of work specified in the section set forth below.

General Construction Work:

- Section 051200: Structural Steel
- Section 055000: Metal Fabrications
- Section 116133: Stage Rigging

IX. REVISIONS: SPECIFICATIONS AND CONTRACT DRAWINGS

The Specifications and the Contract Drawings for the Project are revised in accordance with the provisions set forth below.

- (1) Owner: Wherever the term "Owner" is used in the Specifications and/or the Contract Drawings, such term shall mean the City of New York.
- (2) Other Entities: In the event any entity other than the City of New York is referred to or named as the "Owner" in the Specifications and/or the Contract Drawings, the name of such other entity is deemed deleted and replaced with the "City of New York".
- (3) Architect / Engineer: Wherever the words "Architect", "Engineer", "Architect / Engineer" or "Architect and/or Engineer" are used in the Specifications and/or the Contract Drawings, such words are deemed deleted and replaced with the word "Commissioner".
- (4) Products / Manufacturers: Wherever the Specifications and/or the Contract Drawings require the contractor to provide a particular product (i.e., material and/or equipment) from a designated manufacturer and/or vendor, the term "or approved equal" is deemed inserted, even if only one product and/or manufacturer is specified, except as otherwise provided below.
 - (a) Proprietary Items: If the Bid Booklet contains a Notice which identifies a particular product from a designated manufacturer as a "Proprietary Item", the Contractor shall be required to provide such specified product. In such case, no substitution or "approved equal" will be permitted.
- (5) Special Experience Requirements: Special Experience Requirements for the Project, if any, are set forth in the Bid Booklet. Special Experience Requirements may apply to contractors, subcontractors, installers, manufacturers and/or suppliers. If the Specifications and/or the Contract Drawings contain any Special Experience Requirement that is not set forth in the Bid Booklet, such Special Experience Requirement is deemed deleted, except as otherwise provided below.
 - (a) Any Special Experience Requirement that provides that the entity performing the work or supplying the material must have more than three (3) years of experience, is revised to provide that the entity performing the work or supplying the material must have three (3) years of experience, except as described in paragraph (b) below.
 - (b) Any Special Experience Requirement that pertains to the abatement of hazardous materials shall not be subject to the deletion and/or revision set forth above. Such Special Experience Requirement shall remain in full force and effect.
 - (c) Any Special Experience Requirement that provides that the entity performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such entity must be properly trained for the specified work.
 - (d) Any Special Experience Requirement that provides that the individual workers performing the work must be licensed, authorized, certified, approved by or acceptable to the manufacturer, is deemed deleted and replaced with the requirement that such individual workers must be properly trained for the specified work.
- (6) Alternate Bids: If the agency is requesting the submission of Alternate Bids, a Notice regarding such Alternate Bids is set forth in the Bid Booklet. In the event of any conflict or inconsistency between (1) the Notice regarding Alternate Bids set forth in the Bid Booklet and (2) a provision in the Specifications and/or the Contract Drawings regarding Alternate Bids, the Notice set forth in the Bid Booklet shall prevail. If the agency is not requesting the submission of Alternate Bids, as indicated by the absence of a Notice in the Bid Booklet, and the Specifications and/or the Contract Drawings contain any provision regarding Alternate Bids, such provision is deemed deleted.
- (7) Contractor Retained Engineer: If the Specifications and/or the Contract Drawings require the Contractor to retain an Engineer to provide engineering services for the Project, the following sentence is deemed inserted: "Such Engineer must be a Professional Engineer, licensed in the State of New York."

- (8) LEED Related Provisions: If the Specifications and/or the Contract Drawings require the Contractor to purchase FSC certified wood, rapidly renewable materials, or materials within 500 miles, such provisions are deemed deleted and replaced with the requirement that if the contractor has purchased FSC certified wood, rapidly renewable materials, or materials within 500 miles, the contractor shall submit such forms or documentation as may be required by the City in order for the USGBC to certify that the Project qualifies for the related LEED credit(s).
- (9) Guarantees: Requirements for Guarantees and Maintenance are set forth in Schedule B, which is included in the Addendum to the General Conditions. In the event of any conflict or inconsistency between (1) a guarantee and/or maintenance requirement set forth in the Specifications and/or the Contract Drawings and (2) a guarantee and/or maintenance requirement set forth in Schedule B, the guarantee and/or maintenance requirement set forth in Schedule B shall prevail.
- (10) Warranties: Requirements for Warranties are set forth in Schedule B, which is included in the Addendum to the General Conditions.
- (a) In the event of any conflict or inconsistency between (1) a warranty requirement set forth in the Specifications and/or the Contract Drawings and (2) a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall prevail.
- (b) In the event a warranty requirement set forth in the Specifications and/or the Contract Drawings is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications and/or the Contract Drawings, shall remain in full force and effect.
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from Schedule B, as well as from the Specifications or the Contract Drawings, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (11) Exculpatory Provisions: In the event the Specifications and/or the Contract Drawings contain any provision whereby the consultant and/or any of its officers, employees or agents, including subconsultants, is absolved of responsibility for any act or omission, such provision is deemed deleted.
- (12) Insurance: Provisions regarding insurance coverage the Contractor is required to provide are set forth in Article 22 of the City of New York Standard Construction Contract and Schedule A, which is included in the Addendum to the General Conditions. In the event the Specifications and/or the Contract Drawings contain any provision regarding insurance requirements, such provision is deemed deleted.
- (13) Indemnification: Provisions regarding indemnification are set forth in Articles 7, 12, 22 and 57 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding indemnification, such provision is deemed deleted.
- (14) Dispute Resolution: Provisions regarding dispute resolution are set forth in Article 27 of the City of New York Standard Construction Contract. In the event the Specifications and/or the Contract Drawings contain any provision regarding dispute resolution, such provision is deemed deleted.
- (15) Payment to Other Entities: In the event the Specifications and/or the Contract Drawings contain any provision which requires the Contractor to make payments to an entity other than a subcontractor and/or supplier providing services and/or material for the project, such provision is deemed deleted.
- (16) General Conditions: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the General Conditions, the General Conditions shall prevail.
- (17) Standard Construction Contract: In the event of any conflict or inconsistency between (1) the Specifications and/or the Contract Drawings and (2) the City of New York Standard Construction Contract, the City of New York Standard Construction Contract shall prevail.

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Contract Requirements

Various Articles of the Contract refer to requirements which are set forth in Schedule A of the General Conditions. The Schedule set forth below specifies the following: (1) the referenced Articles of the Contract, and (2) the specific requirements applicable to each separate contract.

REFERENCE	ITEM	REQUIREMENTS	CONTRACT #1
Information For Bidders	Bid Security		See Attachment 1 – Bid Information in the Bid Booklet
Information For Bidders	Performance and Payment Bonds		See Attachment 1- Bid Information in the Bid Booklet
Article 14 Contract	Time of Completion	Consecutive Calendar Days	300
Article 15 Contract	Liquidated Damages	For each consecutive calendar day over completion time	\$600
Article 17 Contract	Sub-Contracts	Not to exceed Percent of Contract Price	60%
Article 21 Contract	Retainage	Percent of Voucher	If 100% bonds are required 5% If 100% bonds are not required, and Contract Price is less than \$1,000,000 10% If 100% bonds are not required, and Contract Price is more than \$1,000,000 10%
Article 24 Contract	Deposit Guarantee	Percent of Contract Price	1%
Article 24 Contract	Period of Guarantee		See Schedule B of the Addendum to the General Conditions
Article 74 Contract	Statement of Work		See Contract Article 74
Article 75 Contract	Compensation to be Paid to Contractor		See Contract Article 75
Article 78 Contract	MWBE Program		See MWBE Utilization Plan in the Bid Booklet

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions

Note: All certificate(s) of insurance submitted pursuant to Contract Article 22.3. 3 must be accompanied by a Certification by Broker consistent with Part III below and include the following information:

- For each insurance policy, the name and NAIC number of issuing company, number of policy, and effective dates;
- Policy limits consistent with the requirements listed below;
- Additional insureds or loss payees consistent with the requirements listed below; and
- The number assigned to the Contract by the City (in the "Description of Operations" field).

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<p>■ Commercial General Liability Art. 22.1.1</p>	<p>The minimum limits shall be \$1,000,000.00 per occurrence and \$2,000,000.00 per project aggregate applicable to this Contract.</p> <p>Additional Insureds:</p> <p>1. City of New York, including its officials and employees, with coverage at least as broad as ISO Forms CG 20 10 and CG 20 37, and</p> <p>2. All person(s) or organization(s), if any, that Article 22.1.1(b) of the Contract requires to be named as Additional Insured(s), with coverage at least as broad as ISO Form CG 20 26. The Additional Insured endorsement shall either specify the entity's name, if known, or the entity's title (e.g., Project Manager).</p> <p>3. _____</p>
<p>■ Workers' Compensation Art. 22.1.2</p> <p>■ Disability Benefits Insurance Art. 22.1.2</p> <p>■ Employers' Liability Art. 22.1.2</p> <p><input type="checkbox"/> Jones Act Art. 22.1.3</p> <p><input type="checkbox"/> U.S. Longshoremen's and Harbor Workers Compensation Act Art. 22.1.3</p>	<p>Workers' Compensation, Employers' Liability, and Disability Benefits Insurance: Statutory per New York State law without regard to jurisdiction.</p> <p>Note: The following forms are acceptable: (1) New York State Workers' Compensation Board Form No. C-105.2, (2) State Insurance Fund Form No. U-26.3, (3) New York State Workers' Compensation Board Form No. DB-120.1 and (3) Request for WC/DB Exemption Form No. CE-200. The City will not accept an ACORD form as proof of Workers' Compensation or Disability Insurance.</p> <p>Jones Act and U.S. Longshoremen's and Harbor Workers' Compensation Act: Statutory per U.S. law.</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

Types of Insurance (per Article 22 in its entirety, including listed paragraph)	Minimum Limits and Special Conditions
<input type="checkbox"/> Hull and Machinery Insurance Art. 22.1.7(b)	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
<input type="checkbox"/> Marine Pollution Liability Art. 22.1.7(c)	\$ _____ each occurrence Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER] Art. 22.1.8 <input type="checkbox"/> Ship Repairers Legal Liability	\$ _____ each occurrence [Contracting agency to fill in total value of City vessels involved]
[OTHER] Art. 22.1.8 <input type="checkbox"/> Collision Liability/Towers Liability	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____
[OTHER] Art. 22.1.8 <input type="checkbox"/> Railroad Protective Liability _____	\$ _____ per occurrence \$ _____ aggregate Additional Insureds: 1. City of New York, including its officials and employees, and 2. _____ 3. _____

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART II. Types of Insurance, Minimum Limits and Special Conditions (Continued)

Insurance indicated by a blackened box (■) or by (X) in the to left will be required under this contract.

<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Asbestos Liability _____</p>	<p>Only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>\$1,000,000 each occurrence, \$2,000,000 aggregate (Combined Single Limit); only required of the Contractor or Subcontractor performing any required asbestos removal.</p> <p>Additional Insureds: 1. City of New York, including its officials and employees, and</p> <p>2. _____ 3. _____</p>
<p>[OTHER] Art. 22.1.8</p> <p><input type="checkbox"/> Boiler Insurance _____</p>	<p>\$200,000</p>
<p>[OTHER] Art. 22.1.8</p> <p>■ Professional Liability</p> <p>In the event any section of the Specifications requires the Contractor to engage a Professional Engineer to provide design and/or engineering services, the Engineer engaged by the Contractor, as well as any sub consultant(s) performing professional services, shall provide Professional Liability Insurance.</p>	<p>\$1,000,000 per occurrence</p> <p>The Contractor's Professional Engineer shall maintain and submit evidence of Professional Liability Insurance in the minimum amount of \$1,000,000 per claim. The policy or policies shall include an endorsement to cover the liability assumed by the Contractor under this Agreement arising out of the negligent performance of professional services or caused by an error, omission or negligent act of the Contractor's Professional Engineer or anyone employed by the Contractor's Professional Engineer.</p> <p>Claims-made policies will be accepted for Professional Liability Insurance. All such policies shall have an extended reporting period option or automatic coverage of not less than two (2) years. If available as an option, the Contractor's Professional Engineer shall purchase extended reporting period coverage effective on cancellation or termination of such insurance unless a new policy is secured with a retroactive date, including at least the last policy year.</p>

SCHEDULE A (FOR PUBLICLY BID PROJECTS)

Relating to Article 22 - Insurance

PART III. Address of Commissioner

Wherever reference is made in Article 7 or Article 22 to documents to be sent to the **Commissioner** (e.g., notices, filings, or submissions), such documents shall be sent to the address set forth below or, in the absence of such address, to the **Commissioner's** address as provided elsewhere in this **Contract**.

ACCO's Office, Insurance Unit

30-30 Thomson Avenue, 4th Floor

Long Island City, New York 11101

SCHEDULE B

Guarantees and Warranties

(Reference: Section 01 7839, Article 2.7 of the DDC Standard General Conditions)

GUARANTY FROM CONTRACTOR

(1) Contractor's Guaranty Obligation: The Contractor shall promptly repair, replace, restore or rebuild, as the Commissioner may determine, any finished Work in which defects of materials or workmanship may appear or to which damage may occur because of such defects, during the one (1) year period subsequent to the date of Substantial Completion (or use and occupancy in accordance with the Contract), except for the areas of Work set forth below:

- Roofing, Waterproofing, and Joint Sealant Work. For these types of work, the guarantee period shall be (2) two years.
- Trees and/or Plant Material. For trees and/or plant material furnished and installed, the guarantee period shall be (2) two years. During the guarantee period, the Contractor shall provide all maintenance services set forth in the Specifications.

(2) Guaranty Period: The obligation of the Contractor, and its Surety under the Performance Bond, is limited to the period(s) of time specified above.

(3) Other Provisions Deemed Deleted: In the event the Specifications and/or the Contract Drawings contain any provisions regarding guaranty requirements, such provisions are deemed deleted and replaced with the guaranty requirements set forth in this Schedule B.

WARRANTY FROM MANUFACTURER

(1) Contractor's Obligation to Provide Warranties: The items of material and/or equipment for which manufacturer warranties are required are listed below. For each item of material and/or equipment listed below, the Contractor shall obtain a written warranty from the manufacturer. Such warranty shall provide that the material or equipment is free from defects for the period set forth below and will be replaced or repaired within such specified period. The Contractor shall deliver all required warranties to the Commissioner.

(2) Required Warranties:

Specification Number	Material or Equipment	Warranty Period
078123	Intumescent Fireproofing	Two Years
116133	Stage Rigging	Three Years
265100	Interior Lighting	Five Years

(3) Application: The obligations under the warranty for the periods specified above shall apply only to the manufacturer of the material or equipment, and not to the Contractor or its Surety; provided, however, the Contractor retains responsibility for obtaining all required warranties from the manufacturers and delivering the same to the Commissioner.

(4) Other Provisions: The warranty requirements set forth in this Schedule B are also included in the Specifications.

(a) In the event of any conflict between a warranty requirement set forth in the Specifications and a warranty requirement set forth in Schedule B, the warranty requirement set forth in Schedule B shall

take precedence.

- (b) In the event a warranty requirement set forth in the Specifications is omitted from Schedule B, such omission from Schedule B shall have no effect and the Contractor's obligation to provide the manufacturer's warranty, as set forth in the Specifications, shall remain in full force and effect
- (c) In the event a warranty requirement for a particular item of material or equipment is omitted from both Schedule B and the Specifications, and the manufacturer of such item actually provides a warranty, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by that manufacturer.
- (d) In the event a warranty requirement is provided for a particular item of material or equipment, and such requirement specifies a warranty period that is longer than that which is actually provided by any of the specified manufacturers, the Contractor shall be obligated to obtain and deliver to the Commissioner the highest level of warranty actually provided by any of the specified manufacturers, unless otherwise directed in writing by the Commissioner.
- (e) Unless indicated otherwise Warranties are to take effect on the date of Substantial Completion.

SCHEDULE C

Contract Drawings

(Reference: Section 01 1000, Article 1.5 (A) of the DDC Standard General Conditions)

The Schedule set forth below lists all Contract Drawings for the Project.

A-000.00	TITLE SHEET
A-100.00	DEMOLITION PLAN
A-110.00	STAGE PLAN
A-111.00	GRID PLAN
A-200.00	SECTION
A-201.00	SECTION
A-300.00	ENLARGED STAIR PLANS
A-301.00	STAIR ELEVATIONS
A-400.00	REFLECT. CEILING PLAN (UNDER THEATRICAL GRID)
A-401.00	REFLECT. CEILING PLAN (ABOVE THEATRICAL GRID)
S-000.00	GENERAL NOTES AND TYPICAL DETAILS
S-001.00	GENERAL NOTES AND TYPICAL DETAILS
S-100.00	GRID DEMOLITION PLAN
S-101.00	GRID FRAMING PLAN
S-102.00	ROOF & HEADBLOCK FRAMING PLAN
S-300.00	SECTIONS
S-301.00	STAIR FRAMING ELEVATION, PARTIAL FRAMING PLANS AND DTLS
S-302.00	TRUSS ELEVATION AND DETAILS
FP-000.00	SPRINKLER SYMBOLS, ABBREVIATIONS, NOTES AND SCHEDULE
FP-100.00	SPRINKLER DEMOLITION PLAN
FP-101.00	SPRINKLER CONSTRUCTION PLAN
FP-300.00	SPRINKLER DETAILS
E-000.00	ELECTRICAL SYMBOLS LIST, ABBREVIATIONS AND NOTES
E-100.00	STAGE AREA PLAN
E-400.00	REFLECTED CEILING PLAN (ABOVE THEATRICAL GRID)
E-501.00	LOADING GALLERY STAIR SECTION AND LIGHTING PLAN AND DTLS
TR-100.00	THEATRE RIGGING STAGE LEVEL PLAN
TR-101.00	THEATRE RIGGING GRIDIRON PLAN
TR-200.00	EXISTING RIGGING DEMOLITION
TR-201.00	THEATRE RIGGING LONGITUDINAL SECTION
TR-202.00	THEATRE RIGGING TYPICAL COUNTERWEIGHT SET
TR-300.00	THEATRE RIGGING DETAILS

SCHEDULE D

NOT USED

SCHEDULE E

NOT USED

THIS PAGE LEFT BLANK

TABLE OF CONTENTS**CONTRACT NO.1 - GENERAL CONSTRUCTION****DIVISION 1 - GENERAL REQUIREMENTS**

Section 011100 Summary of Work

DIVISION 2 - EXISTING CONDITIONS

Section 024119 Selective Demolition and Alteration Work
 Section 028013 Allowance for Incidental Asbestos Abatement

DIVISION 4 - MASONRY

Section 049000 Masonry Restoration

DIVISION 5 - METALS

Section 051200 Structural Steel
 Section 055000 Metal Fabrications

DIVISION 7 - THERMAL AND MOISTURE PROTECTION

Section 078123 Intumescent Fireproofing

DIVISION 9 - FINISHES

Section 099000 Painting and Finishing

DIVISION 11 - EQUIPMENT

Section 116133 Stage Rigging

DIVISION 21 - FIRE PROTECTION

Section 210000 Common Work Results for Fire Protection
 Section 210553 Identification for Fire Suppression Piping and Equipment
 Section 211313 Wet-Pipe Sprinkler Systems

DIVISION 26 - ELECTRICAL

Section 260500 Common Work Results for Electrical
 Section 260510 Basic Electrical Materials and Methods
 Section 260524 Feeders and Branch Circuitry
 Section 260526 Grounding and Bonding for Electrical Systems
 Section 260533 Raceways and Boxes for Electrical Systems
 Section 260553 Identification for Electrical Systems

Section 260923	Lighting Control Devices
Section 262726	Wiring Devices
Section 265100	Interior Lighting

END OF TABLE OF CONTENTS

CONTRACT # 1
GENERAL CONSTRUCTION WORK

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 011100

SUMMARY OF WORK

PART 1 GENERAL

1.1 WORK INCLUDED

A. Work of this Section includes the following descriptions:

1. Project requirements.

1.2 PROJECT REQUIREMENTS

A. Project requirements include but are not limited to the following scope of work:

1. Removal and replacement of a portion of the existing gridiron.
2. Removal and replacement of the existing loading gallery.
3. Reinforcement of existing head-block beams.
4. Removal and replacement of the stage rigging system.
5. Reinforcement of the existing building structure to accommodate increased loads from the stage rigging system.
6. Removal of existing engineer's ladder to gridiron and construction of a new ship's ladder access to gridiron and loading gallery.
7. New engineer's ladder from loading gallery to roof.
8. Removal and replacement of sprinkler piping as required for construction of new work.
9. New lighting at ships ladder, loading gallery, and gridiron.
10. Incidental masonry repair and repointing.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION (NOT USED)

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 024119

SELECTIVE DEMOLITION AND ALTERATION WORK

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the requirements of the Contract Documents.

1.2 SECTION INCLUDES

- A. The Work of this Section includes all labor, materials, equipment and services necessary to complete the selective demolition and alteration work as shown on the drawings and/or specified herein, including but not limited to the following:
 1. Alterations, selective demolition and removals as noted on drawings and as required to accommodate new construction.
 2. Removal of portion of gridiron, removal of existing ladder to gridiron, removal of concrete encasement at existing steel framing for attachment of new steel.
 3. Removal of debris.
 4. Protection of existing building and spaces to remain, and shoring of the structure as required for structural integrity and personal safety.
 5. Protection of existing curbs and sidewalks.
 6. Patching and refinishing of existing surfaces damaged as a result of this work.
 7. Protection, including the stage floor during steel erection and existing fire curtain.
 8. Existing material usage.

1.3 QUALITY ASSURANCE

- A. The Contractor shall comply with the requirements of all applicable Federal, State and local safety and health regulations regarding the demolition of structures including ANSI/NFPD 241-Building Construction and Demolition Operations.
- B. The Contractor shall be responsible for any damage to any adjacent structures or buildings to remain.
- C. Qualifications: Qualifications of Contractor for work of this Section shall not be less than three (3) years of field experience in work of this nature.

1.4 RELATED SECTIONS

- A. Alteration and removal requirements for mechanical and electrical work - Mechanical and Electrical Sections.

1.5 SUBMITTALS

- A. Schedule of Demolition Operations: Submit demolition procedures and operational sequence for Commissioner's review prior to start of work. Submit a written request to Commissioner well in advance of executing any cutting or alteration which affects:
1. The work of tying in or connecting to operational systems of the building, including electrical, mechanical and security systems.
 2. The work of the City of New York or any separate Contractor.
 3. The structural value or integrity of any element of the project or of adjacent structures.
 4. The integrity or effectiveness of weather-exposed and moisture-resistant elements or systems.
 5. The efficiency, operational life, maintenance, or safety of operational elements or systems.
- B. Notice of Differing Conditions: Submit a written notification if, during the work of demolition and cutting, conditions are discovered which significantly vary from those shown on the drawings. Do not commence work until approval of Commissioner.
- C. Shop Drawings: Submit the following prior to starting work:
1. Submit for Commissioner's information shop drawings indicating location and typical construction details of temporary dustproof and weatherproof partitions.

1.6 SPECIAL PRECAUTION

- A. Hazardous materials may be encountered during demolition operations including asbestos; comply with applicable regulations, laws, and ordinances concerning removal, handling, and protection against exposure or environmental pollution. Refer to "Specifications for Abatement of Asbestos-Containing Materials" included herein.

1.7 JOB CONDITIONS

- A. Condition of Structure
1. The Contractor for the work of this Section shall be held to have visited the site, examined the premises, determined for himself the existing conditions, character of equipment and facilities needed for the performance of the work, and all matters which may in any way affect the work before submitting a bid.
 - a. Information regarding existing construction or conditions is based on available record drawings which may or may not truly reflect existing conditions. Such information is included on the assumption that it may be of interest to the Contractor, but the Commissioner, the City of New York and their consultants do not assume responsibility for its accuracy or completeness.
 - b. Notify the Commissioner if, during the course of demolition, conditions are discovered which significantly vary from those shown on the drawings. Do not proceed until authorized by Commissioner.

2. The Contractor shall accept the condition of the site and structures as found. The Commissioner and the City of New York assume no responsibility for condition of site or structures nor the continuation of the condition existing at time of bidding or thereafter.
- B. Areas of building to be demolished or altered will be vacated and discontinued in use prior to the start of the work.
1. Surrounding areas of the building shall remain operational by the City of New York.
- C. Partial Removal
1. Items of savable value to the Contractor may be removed from the structure as the work progresses. Salvaged items must be transported from the site as they are removed.
 2. Storage or sale of removed items on the site will not be permitted.
- D. Explosives: The use of explosives will not be permitted.
- E. Traffic
1. Conduct demolition operations and the removal of debris to ensure minimum interference with roads, streets, walks and other adjacent occupied or used facilities.
 2. Do not close or obstruct streets, walks or other occupied or used facilities without permission from authorities having jurisdiction. Provide alternate routes around closed or obstructed traffic ways if required by governing regulations.
- F. Utilities
1. Refer to Division 22 and 26 of the specifications for special requirements concerning utilities and services.
 2. Maintain any existing utilities required to remain; keep in service and protect against damage during demolition operations.
 3. Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by authorities having jurisdiction. Provide temporary services during interruptions to existing utilities, as acceptable to the governing authorities.
 4. Disconnect and seal any abandoned utilities before starting demolition operations. Coordinate all work with local utility companies having jurisdiction.
- 1.8 SCHEDULING
- A. Before commencing any alteration or demolition work, submit for review by the Commissioner, and approval of the City of New York, a schedule showing the commencement, the order, and the completion dates for the various parts of this work.
- B. Before starting any work relating to existing utilities (electrical, sewer, water, heat, gas, fire lines, etc.) that will temporarily discontinue or disrupt service to the structures to remain, notify the Commissioner and the City of New York 7 days in advance and

obtain the City of New York's approval in writing before proceeding with this phase of the work.

PART 2 PRODUCTS

Refer to Part 3 - Execution, for Product Requirements

PART 3 EXECUTION

3.1 PROTECTION

- A. Take full precautions to protect workmen, passersby or any other persons from falling debris and other hazards of demolition operations.
- B. Execute demolition work to insure protection of existing portions of building to remain against damages which might occur from falling debris or other cause. Do not interfere with use of adjacent occupied buildings and areas. Maintain free, safe passage to and from occupied adjacent buildings.
- C. Materials Placement: Do not load structure with weight that will endanger, overload or cause excessive deflection of the existing structure, or that will damage finished surfaces adjacent to and/or supported by the existing structure, except portions being removed.
- D. Construction Operations: Do not employ any construction operation, equipment or vehicles that will endanger, overload or cause excessive deflection of the existing structure, or that will damage finished surfaces adjacent to and/or supported by the existing structure, except portions being removed.
- E. Take precautions to guard against movement, settlement, damage, or collapse of any part of building, sidewalks, adjacent property or street passages; be liable for any such movement, settlement or collapse. If such damage does accidentally occur, Contractor shall repair promptly at no cost to the City of New York.
- F. Provide the necessary safeguards to prevent accidents, to avoid all necessary hazards and protect the public, the work and property at all times, including Saturdays, Sundays, and holidays.
- G. Be responsible for any and all damages which may arise or occur to any party whatsoever by reason of the neglect in providing proper lights, guards, barriers, or any other safeguards to prevent damage to property, life and limb.
- H. Make such explorations and probes as are necessary to ascertain any required protective measures before proceeding with demolition and removal. Give particular attention to shoring and bracing requirements so as to prevent any damage to existing construction.
- I. Provide, erect and maintain catch platforms, lights, barriers, weather protection, warning signs, and other items as required for proper protection of the workmen engaged in demolition and alteration operations, occupants of the building, public and adjacent property. Any damage caused by the Contractor's operations shall be promptly repaired by the Contractor at no cost to the City of New York.

- J. Provide and maintain temporary protection of the existing structure designated to remain where demolition, removal, and new work are being done, connections made, materials handled, or equipment moved.
- K. Take necessary precautions to prevent dust and dirt from rising. Protect unaltered portions of the existing building affected by the operations under this Section by dustproof partitions and other adequate means.
- L. Provide adequate fire protection in accordance with local Fire Department requirements.
- M. Do not close or obstruct walkways, passageways, or stairways. Do not store or place materials in passageways, stairs, or other means of egress. Conduct operations with minimum traffic interference.
- N. Be responsible for any damage to the existing structure or contents by reason of the insufficiency of protection provided.
- O. Erect temporary covered passageways at street level as required by authorities having jurisdiction.
- P. Promptly repair damages caused to adjacent facilities by demolition operations at no cost to the City of New York.
- Q. Provide and maintain weather protection at exterior openings so as to fully protect the interior premises against damage from the elements until such openings are closed by new construction.

3.2 INSPECTION

- A. Verify that areas of demolition work are protected and temporary dustproof partitions have been installed.
- B. Verify that construction to be removed is not load bearing or has been properly braced, framed or supported.
- C. Inspect existing conditions of the project, including elements subject to damage or to movement during demolition and cutting.
- D. After uncovering work, inspect the conditions affecting the installation or performance of the work.
 - 1. Report differing or questionable conditions to the Commissioner in writing; do not proceed with the work until the Commissioner has provided further instructions.

3.3 PREPARATION

- A. Provide adequate temporary support as necessary to assure the structural value or integrity of the affected portion of the work
- B. Provide devices and methods to protect other portions of the project from damage.
- C. Pollution Controls

1. Use water sprinkling, temporary enclosures, and other suitable methods to limit the amount of dust and dirt rising and scattering in the air to the lowest practical level. Comply with governing regulations pertaining to environmental protection.
 - a. Do not use water when it may create hazardous or objectionable conditions such as ice, flooding, and pollution.
2. Clean adjacent structures and improvements of dust, dirt and debris caused by demolition operations. Return adjacent areas to condition existing prior to the start of the work.
3. Provide drainage for temporary water use.

3.4 DEMOLITION AND CUTTING

- A. Selectively demolish existing construction in conformance with the drawings and these specifications.
 1. Execute cutting and demolition by methods which will prevent damage to other work and will provide proper surface to receive installation of work by others and patching of finish surfaces.
 2. Do all cutting or removal so as to leave neat, true, plumb and square edges, at edges to remain. Use carborundum or diamond saw equipment for cutting masonry, concrete and stone work, where edges or surfaces are to remain.
 3. Do not cut or remove construction which might weaken or impair the structural integrity or strength of the structural framing or support systems which are to remain.
 4. Demolish and remove materials as shown on the drawings without damage to the remaining parts of the structure or mechanical/electrical/utility systems.
 5. Where portions of structures are to be removed, remaining portions shall be protected from damage and prepared to fit new construction. Damage to portions of structures to remain shall be repaired.
 6. Reinforcing steel in existing structures shall be left in place, cleaned and aligned to provide tie with new work.
 7. Existing waterproofing systems and flashings shall be carefully exposed and protected to maintain workable conditions of fitting new work with existing construction.
 8. Proceed with demolition in a systematic manner.
 9. Demolish concrete and masonry in small sections.

3.5 WORKMANSHIP STANDARDS FOR ALTERATION AND REMOVAL WORK

- A. Cut, remove, alter, temporarily remove and replace, or relocate existing work as required for performance of the work. Perform such work required with due care, including shoring and bracing.

- B. Coordinate patching involving the various trades whether or not specifically mentioned in the respective specification Sections.
- C. Materials or items demolished and not designated to become the property of the City of New York or to be reinstalled shall become the property of the Contractor and shall be removed from the City of New York's property.
- D. Execute the work in a careful and orderly manner, with the least possible disturbance to the public and to the occupants of the adjacent buildings.
- E. In general, demolish masonry in small sections. Where necessary to prevent collapse of any construction, install temporary shores, struts, or bracing.
- F. Materials to be removed by existing elevators shall be put in enclosed containers.
- G. Where existing equipment and/or fixtures are indicated to be reused, repair such equipment and/or fixtures and refinish to put in perfect working order. Refinish as directed.
- H. Cut out embedded anchorage and attachment items as required to properly provide for patching and repair of the respective finishes.
- I. Where utilities are removed, relocated or abandoned, cap, valve, plug, or by-pass to make complete and working installation.
- J. Restore existing pipe and duct coverings damaged by work under this Contract to original undamaged condition.
- K. Immediately restore to service and repair any damage caused by Contractor's workmen to existing pipe and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems which are not scheduled for discontinuance or abandonment.
- L. Upon completion of contract, deliver work complete. Damage that may be caused by Contractor or Contractor's workmen to existing structures designated to remain, grounds, and utilities shall be repaired by Contractor and left in as good condition as existed prior to damaging.
- M. Restore finish work of floors, walls, and ceilings remaining in place but damaged or defaced because of demolition or alteration work to condition equal that which existed at beginning of work under this Contract.
- N. Where alteration or removals expose damaged or unfinished surfaces or materials, refinish such surfaces or materials, or remove them and provide new or salvaged materials to make continuous surfaces uniform.
- O. Perform new work and restore and refinish existing work in conformance with applicable requirements of the specifications, except as follows:
 - 1. Materials for use in repair of existing surfaces, but not otherwise specified, shall conform to the highest standards of the trade involved, and be in accordance with approved industry standards, and shall be as required to match existing surfaces.

2. Workmanship for repair of existing materials shall, unless otherwise specified, be equal to similar workmanship existing in or adjacent to the space where the work is being done.
 3. Installation of salvaged items where no similar items exist shall be done in accordance with the highest standards of the trade involved and in accordance with approved shop drawings.
- P. Materials or items designated to become the property of the City of New York shall be as shown on the drawings. Remove such items with care and store them in a location at the site to be designated by the City of New York.
- Q. Materials or items designated to be reinstalled shall be as shown on the drawings. Remove such items with care under the supervision of the trade responsible for reinstallation; protect and store until required. Replace materials or items damaged in their removal with similar new material.
- R. The existing building shall not be used as a work shop. Neither shall the furnishings or equipment in any room be used as work benches. Should any damage occur during the progress of the work to any furniture, fixtures, equipment, or appurtenances therein, such damage shall be repaired, replaced or made good by the Contractor without extra cost to the City of New York.
- S. Where removing existing floor finish and base, remove all adhesive and leave floors and walls smooth and flush, ready to receive new finish.
- T. Finish new and adjacent existing surfaces as specified for new work. Clean existing surfaces of dirt, grease and loose paint before refinishing.
- 3.6 USE OF EXISTING MATERIAL LIFT
- A. Contractor shall inspect existing lift to understand the current condition of the lift.
- B. Contractor shall contact manufacturer to find out the load restrictions on the lift prior to start of usage.
- C. Upon completion of the use of the lift, contractor shall restore lift to original condition.
1. The Contractor will arrange to have the materials lift inspected by the manufacturer and certified as being in good working order. The cost of inspection as well as any repairs and/or replacement that may be required will be at the Contractor's expense without extra cost to the City of New York

3.7 DISPOSAL OF DEMOLISHED MATERIALS

- A. General
1. Remove from the site debris, rubbish and other materials resulting from work of this Section.
 2. Burning of removed materials from demolished structures will not be permitted on the site.

- B. Removal: Transport materials removed from demolished structures and legally dispose of off site. Pay any and all fees associated with disposal work. Leave the site in an orderly condition to the approval of the Commissioner.

3.8 CLEANING UP

- A. Remove debris at the end of each work day. Maintain existing premises in a neat and clean condition.

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 028013 – GENERAL CONTRACTOR WORK

ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

1.01 SCOPE FOR ASBESTOS ABATEMENT WORK

- A. The "General Conditions" apply to the work of this Section.
- B. The Asbestos abatement contractor shall remove asbestos containing materials as needed to perform the other work of this Contract when discovered during the course of work. When required, the Asbestos abatement contractor shall replace the ACM with non-asbestos containing materials. An allowance of **\$15,000.00** for the **General Contractor** is herein established for this incidental work when so ordered and authorized by the Commissioner.
- C. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF THE RULES AND REGULATIONS OF THE ASBESTOS CONTROL PROGRAM AS PROMULGATED BY TITLE 15 CHAPTER I OF RCNY AND NEW YORK STATE DEPARTMENT OF LABOR INDUSTRIAL CODE RULE 56 CITED AS 12 NYCRR, PART 56 WHICHEVER IS MORE STRINGENT AS PER LATEST AMENDMENTS TO THESE LAWS AND AS MODIFIED HEREIN BY THESE SPECIFICATIONS.
- D. ALL DISPOSAL OF ASBESTOS CONTAMINATED MATERIAL SHALL BE PER LOCAL LAW 70/85.
- E. THE ASBESTOS ABATEMENT CONTRACTOR'S ATTENTION IS DIRECTED TO THE FACT THAT CERTAIN METHODS OF ASBESTOS ABATEMENT ARE PROTECTED BY PATENTS. TO DATE, PATENTS HAVE BEEN ISSUED WITH RESPECT TO "NEGATIVE PRESSURE ENCLOSURE" OR "NEGATIVE-AIR" OR "REDUCED PRESSURE" AND "GLOVE BAG".
- F. THE ASBESTOS ABATEMENT CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR AND SHALL HOLD THE DEPARTMENT OF DESIGN AND CONSTRUCTION AND THE CITY HARMLESS FROM ANY AND ALL DAMAGES, LOSSES AND EXPENSES RESULTING FROM ANY INFRINGEMENT BY THE ASBESTOS ABATEMENT CONTRACTOR OF ANY PATENT, INCLUDING BUT NOT LIMITED TO THE PATENTS DESCRIBED ABOVE, USED BY THE ASBESTOS ABATEMENT CONTRACTOR DURING PERFORMANCE OF THIS AGREEMENT.
- G. "Asbestos" shall mean any hydrated mineral silicate separable into commercially usable fibers, including but not limited to chrysotile (serpentine), amosite (cumingtonite-grunerite), crocidolite (riebeckite), tremolite, anthrophyllite and actinolite.

- H. Prior to starting, the Asbestos abatement contractor must notify the Commissioner of the Department of Design and Construction if he/she anticipates any difficulty in performing the Work as required by these Specifications. The Asbestos abatement contractor is responsible to prepare and submit all filings, notifications, etc. required by all City, State and Federal regulatory agencies having jurisdiction.

The Asbestos abatement contractor is responsible for submitting the Asbestos Project Notification Form (ACP-7 Form) to the Department of Environmental Protection, Asbestos Control Program, as per Title 15, Chapter I of RCNY and to the NYSDOL as per Industrial Code Rule 56.

The Asbestos abatement contractor is responsible for preparing, and submitting Asbestos Variance Application (ACP-9). If a Variance is required, the Asbestos abatement contractor is responsible to retain a NYSDOL Asbestos Project Designer, as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required variance.

The General contractor is responsible for preparing and submitting an Asbestos Abatement Permit and/or Work Place Safety Plans (WPSP) that may be required for the completion of the Contract or incidental work. If such plans are required, the Asbestos abatement contractor is responsible to retain a NYSDOL Licensed Design Professional as defined in Title 15, Chapter 1 of the RCNY to prepare and submit the required plans.

The Asbestos abatement contractor is responsible for the submission of all required documents to the NYCDEP to acquire the appropriate Asbestos Project Conditional Closeout (ACP-20) and/or Asbestos Project Completion Forms (ACP-21) on a timely basis for the completion of the incidental work encountered under this contract.

The Asbestos abatement contractor will be required to attend an on-site job meeting with the Construction Project Manager prior to the start of work to examine conditions and plan the sequence of operations, etc.

The Asbestos abatement contractor shall have a NYSDOL/NYCDEP Asbestos Supervisor onsite to oversee the work and conduct a final visual inspection as required by both Title 15, Chapter 1 of the RCNY and NYSDOL Industrial Code Rule 56.

- I. All work shall be done during regular working hours unless the Asbestos abatement contractor requests authorization to work in other than regular working hours and such authorization is granted by the Commissioner. (Regular work hours are those hours during which any given facility, in which work is to be done, is customarily open and functioning, normally between the hours of 8:00 A.M. and 4:00 P.M. Monday - Friday.) If such work schedule is authorized by the Commissioner, the work shall be done at no additional cost to the City.

- J. The Commissioner may order that work be done in other than regular working hours as herein by defined and this order may require the Asbestos abatement contractor to pay premium or overtime wages to complete the work. If the Commissioner orders work in other than regular working hours, the Asbestos abatement contractor shall multiply the unit price for that portion of the work requiring premium wages by 1.50 when computing payment in accordance with Paragraph 1.09. All requests for premium payment must be supported by certified payroll sheets and field sheets approved by the Construction Project Manager.

1.02 QUALIFICATIONS OF ASBESTOS ABATEMENT CONTRACTOR

- A. Requirements: The asbestos abatement contractor must demonstrate compliance with the special experience requirements set forth in subparagraphs (1) through (5) below. The asbestos abatement contractor must, submit documentation demonstrating compliance with all listed requirements. Such documentation shall include without limitation, all required licenses, certificates, and documentation.
1. The asbestos abatement contractor must, whether an individual, corporation, partnership, joint venture or other legal entity, must demonstrate for the three year period prior to the work, that it has been licensed by the New York State Department of Labor, as an "Asbestos abatement contractor".
 2. The asbestos abatement contractor must, for the three year period prior to the work, have been in the business of providing asbestos abatement services as a routine part of its daily operations.
 3. The asbestos abatement contractor proposing to do asbestos abatement work must be thoroughly experienced in such work and must provide evidence of having successfully performed and completed in a timely fashion at least five (5) asbestos abatement projects of similar size and complexity. The aggregate cost of these projects must be at least \$250,000.00 in each of the three years.
 4. For each project submitted to meet the experience requirements set forth above, the asbestos abatement contractor must submit the following information for the project; name and location of the project; name title and telephone number of the owner or the owner's representative who is familiar with the asbestos abatement contractor's work, brief description of the work completed as a prime or sub-asbestos abatement contractor; amount of contract or subcontract and the date of completion.
 5. The asbestos abatement contractor must demonstrate that it has the financial resources, supervisory personnel and equipment necessary to carry out the work and to comply with the required performance schedule, taking into consideration other business commitments. The asbestos

abatement contractor must submit such documentation as may be required by the Department of Design and Construction to demonstrate that it has the requisite capacity to perform the required services of this contract.

- B. Insurance Requirements: The asbestos abatement contractor must provide asbestos liability insurance in the following amount: 1 million dollars per occurrence, 2 million dollars aggregate (combined single limit). The City of New York shall be named as an additional insured on such insurance policy.
- C. Throughout the specifications, reference is made to codes and standards which establish qualities and types of workmanship and materials, and which establish methods for testing and reporting on the pertinent characteristics thereof.

1.03 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITIES

The Asbestos abatement contractor will visit the subject location within one (1) working day of notification to ascertain actual work required. If the project is identified as being "urgent", then work shall commence no later than 48 hours from the time of notification. In this event, the asbestos abatement contractor shall immediately notify when applicable EPA NESHAPS Coordinator, NYSDOL Asbestos Control Bureau and NYCDEP Asbestos Control Program of start of the work and file the necessary Asbestos Notifications and any applicable Variance Applications with the regulatory agencies cited above..

In the event that the project is not classified as "urgent" the Asbestos abatement contractor shall notify the EPA NESHAPS Coordinator, NYSDOL and NYCDEP by submitting the requisite asbestos project notification forms, postmarked 10 days before activity begins if 260 linear feet or more and/or 160 square feet or more of asbestos containing material will be disturbed.

The following information must be included in the notification:

- A. Name and address of building City or operator;
- B. Project description:
 - 1. Size - square feet, number of linear feet, etc;
 - 2. Age - date of construction and renovations (if known);
 - 3. Use - i.e., office, school, industrial, etc.
 - 4. Scope - repair, demolition, cleaning, etc.
- C. Amount of asbestos involved in work and an explanation of techniques used to determine the amount;

- D. Building location/address, including Block and Lot numbers;
- E. Work schedule including the starting and completion dates;
- F. Abatement methods to be employed;
- G. Procedures for removal of asbestos-containing material;
- H. Name, title and authority of governmental representative sponsoring project.

1.04 WORK INCLUDED IN UNIT PRICE

The Asbestos abatement contractor will be paid a basic unit price of **\$25.00** per square feet for the removal and disposal of asbestos containing material and replacement of the same with non-asbestos containing materials.

Unit price shall include all costs necessary to do the work of this Contract, including but not limited to: labor, materials, equipment, utilities, disposal, insurance, overhead and profit.

1.05 AIR MONITORING – ASBESTOS ABATEMENT CONTRACTOR

- A. "Air Sampling" shall mean the process of measuring the fiber content of a known volume of air collected during a specific period of time. The procedure utilized for asbestos follows the NIOSH Standard Analytical Method 7400 or the provisional transmission electron microscopy methods developed by the USEPA and/or National Institute of Standard and Technology which are utilized for lower detectability and specific fiber identification.
- B. Air monitoring of Asbestos abatement contractor's personnel will be performed in conformance with OSHA requirements, (All costs associated with this work are deemed included in the unit price.).
- C. Qualifications of Testing Laboratory:

The industrial hygiene laboratory shall be a current proficient participant in the American Industrial Hygiene Association (AIHA) PAT Program. The laboratory identification number shall be submitted and approved by the City. The laboratory shall be accredited by the AIHA and New York State Department of Health Environmental Laboratory Approval Program (ELAP).

Note: Work area air testing and analysis before, during and upon completion of work (clearance testing) will be performed by a Third Party Air Monitor under separate Contract with the City.

1.06 THIRD PARTY MONITORING AND LABORATORY

GENERAL CONTRACTOR WORK ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

- A. The NYCDDC, at its own expense, will employ the services of an independent Third Party Air Monitoring Firm and Laboratory. The Third Party Air Monitor will perform air sampling activities and project monitoring at the Work Site.
- B. The Laboratory will perform analysis of air samples utilizing Phase Contrast Microscopy (PCM) and/or Transmission Electron Microscopy (TEM).
- C. The Third Party Air Monitoring Firm and the designated Project Monitor shall have access to all areas of the asbestos removal project at all times and shall continuously inspect and monitor the performance of the Asbestos abatement contractor to verify that said performance complies with this Specification. The Third-Party Air Monitor shall be on site throughout the entire abatement operation.
- D. The NYCDDC will be responsible for costs incurred with the Third Party Air Monitoring Firm and laboratory work. Any subsequent additional testing required due to limits exceeded during initial testing shall be paid for by the Asbestos abatement contractor.

1.07 PAYMENT REQUEST DOCUMENTATION

- B. The following information shall be included for each payment request:
 - 1. Description of work performed.
 - 2. Linear footage and pipe sizes involved.
 - 3. Square footage for boiler & breaching insulation removed.
 - 4. Square footage of non pipe and boiler areas removed, patched, enclosed, sealed, or painted.
 - 5. Square footage of encapsulation, sealing, patching, and painting involved.
 - 6. Total cost associated with compliance with the assigned task.
 - 7. Architectural, Electrical, HVAC, Plumbing, etc. work incidental to the Asbestos Abatement Work.
 - 8. A certified copy (in form 4312-39) to the Comptroller or Financial Officer of the New York City to the effect that the financial statement is true.
 - 9. A signed copy (in form 6506q-6) of certificate of compliance with non-discriminatory provisions of the Contract.
 - 10. Attach a copy of valid workmen compensation insurance.

GENERAL CONTRACTOR WORK ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

- 11. Valid asbestos insurance per occurrence.
- 12. General liability insurance when required.
- C. Each payment request shall include a grand total for all work completed that billing period, the landfill waste manifests and a copy of waste transporter permit. The Department of Design and Construction will inspect the work performed, review the cost and approve or disapprove requests for payment.
- D. EXPOSURE LOG: With this final payment, the Asbestos abatement contractor shall submit a listing of the names and social security numbers of all employees actively engaged in the abatement work of this Contract. This list shall include a summary showing each part of the abatement work in which the employee was engaged and the dates thereof.

1.08 QUANTITY CALCULATIONS

In order to determine the square footage involved for the various pipe sizes of pipe insulation that might be encountered, the following table is to be used.

<u>PIPE INSULATION SIZE O.D.</u>	<u>PIPE SIZE O.D.</u>	<u>SQUARE FOOTAGE PER LINEAR FOOT</u>
2-1/2"	1/2"	0.65
2-3/4"	3/4"	0.72
3"	1"	0.79
3-1/4"	1-1/4"	0.85
3-1/2"	1-1/2"	0.92
4"	2"	1.05
4-1/2"	2-1/2"	1.18
5"	3"	1.31
6"	3-1/4"	1.57
7"	3-1/2"	1.83
8"	4"	2.09
9"	5"	2.36
10"	6"	2.62
12"	8"	3.14
14"	10"	3.67
16"	12"	4.19
18"	14"	4.71

1.09 METHOD OF PAYMENT

Payment shall be made in accordance with Items A through R below. Payment shall be calculated based on the actual quantity of the item performed by the asbestos abatement contractor, times the unit price specified below. Credits may apply to certain times, as specified below.

- A. REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING PIPE INSULATION:** Actual linear footage, multiplied by the square footage factor listed for the respective pipe size in Section 1.09, multiplied by the unit price in Section 1.05.

EXAMPLE: 100 lin.ft. of 1/2" pipe and 100 lin.ft. of 6" pipe, including elbows, tees. Flanges, etc.

$$100 \times 0.65 = 65 \text{ sq.ft.} \quad 65 \times \text{unit price} = \text{Payment}$$

$$100 \times 2.62 = 262 \text{ sq.ft.} \quad 262 \times \text{unit price} = \text{Payment}$$

- B. REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER INSULATION:** (all types including Silicate Block and including the removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.

EXAMPLE: Item B. removal and replacement of 1000 S.F. of boiler insulation (incl. Silicate block)

$$1000 \text{ S.F.} \times (1.5) \times \text{the Unit Price} = \text{Payment}$$

- C. REMOVAL, DISPOSAL AND REPLACEMENT OF TANK INSULATION:** (all types including removal/replacement of metal jacketing) Payment shall be made at 1.5 times the unit price per square foot.

- D. REMOVAL, DISPOSAL AND REPLACEMENT OF BOILER UPTAKE, & BREACHING INSULATION:** (all types including stiffening angles and wire lath) Payment shall be made at 2.0 times the unit price per square foot.

- E. REMOVAL, DISPOSAL AND REPLACEMENT OF DUCT INSULATION:** Payment shall be made at 1.0 times the unit price per square foot.

- F. REMOVAL, DISPOSAL AND REPLACEMENT OF SOFT ASBESTOS CONTAINING MATERIAL:** (Including sprayed-on fire proofing and sound proofing) Payment shall be made at 1.0 times the unit price per square foot of surface area. Area of irregular surfaces must be calculated and confirmed with DDC representative.

- G. ACOUSTIC PLASTER REPAIR AND/OR ENCAPSULATION:** Payment shall be made at 0.5 times the unit price per square foot.

- H. **PATCHING OR REPAIR** of items listed in A through F will be paid at 0.33 times the unit price per square foot.
- I. **REMOVAL, DISPOSAL AND REPLACEMENT OF WATERPROOFING ASBESTOS CONTAINING MATERIAL:** (including friable and non-friable waterproofing material from interior and exterior walls, floors, foundations, penetrations, louvers, vents and openings other than windows, doors and skylights) Payment shall be made at 0.5 times the unit price per square foot.
- J. **REMOVAL, DISPOSAL AND REPLACEMENT OF ASBESTOS CONTAINING ELECTRICAL WIRING INSULATION:** (including friable and non-friable wiring insulation) Payment shall be made at 0.33 times the unit price per square foot.
- K. **PAINTING:** Payment shall be made at 0.05 times the unit price per square foot.
- L. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING PLASTER:** from ceilings and walls, including any wire lath and disposal as asbestos containing waste. Payment shall be made at 0.80 times the unit price per square foot.
- M. **REMOVAL AND DISPOSAL OF ASBESTOS-CONTAINING FLOOR TILES, CEILING TILES, TRANSITE PANELS:** (including any adhesive, glue, mastic and/or underlayment) and disposal as asbestos containing waste. Payment shall be made at 0.40 times the unit price per square foot. If multiple layers are discovered, each additional layer shall be paid at 0.20 times the unit price per square foot.
- N. **ADDITIONAL CLEAN UP/HOUSEKEEPING OF WORK AREA:** (excluding pre-cleaning of work area required by regulations) HEPA vacuuming and wet cleaning of asbestos contaminated surface. Payment shall be made at 0.20 times the unit price per square foot. When GLOVE BAG is employed to remove ACM, cost of HEPA vacuuming and wet cleaning of floor area up to 3 feet on each side of glove-bag shall be included in unit price and no extra payment will be made.
- O. **REMOVAL, DISPOSAL OF ASBESTOS-CONTAINING ROOFING MATERIAL:** including mastic, flashing and sealant compound and provide temporary asbestos-free roof covering consisting of one layer of rolled roofing paper sealed with asphaltic roofing compound. Payment shall be made at 0.8 times the unit price per square foot. Credit at a rate of 0.33 times the unit price will be taken for each square foot of temporary roof covering which the Asbestos abatement contractor is directed not to install.
- P. **PICK-UP AND DISPOSAL OF GROSS DEBRIS:** (excluding any waste generated from abatement under Item A-R) at a rate of \$150 per cubic yard for asbestos contaminated waste and \$75 per cubic yard for non-asbestos

contaminated waste. This cost includes all labor and material cost associated with work.

- Q. **REMOVAL OF ASBESTOS-CONTAINING BRICK, BLOCK, MORTAR, CEMENT OR CONCRETE:** along with all surfacing materials including wire lath and/or other supporting structures and disposal as ACM waste. Payment shall be made at a rate of \$25.00 per cubic foot of material removed.
- R. **REMOVAL AND DISPOSAL OF ASBESTOS CONTAINING WINDOW/DOOR CAULKING:** including friable and non-friable caulking, weather-stripping, glazing, sealants or other waterproofing materials applied to windows, doors, skylights, etc. Payment shall be made at the rate of \$400.00 per opening regardless of size or configuration. This cost includes labor, consumable materials, set-up/breakdown, removal and disposal, as required.

Note 1: CREDIT: For items listed in A through F, a credit at a rate of 0.33 times the unit price, times the respective multiplier (for each item) will be taken for each square foot of insulation which the asbestos abatement contractor is not directed to reapply.

Note 2: MINIMUM PAYMENT: The minimum payment per call at any individual job sites or various job sites during the same day will be eight hundred dollars (\$800.00).

Note 3: All payments shall be made as described in paragraph 1.09 herein.

Note 4: WORKING HIGHER THAN 12 FEET ABOVE FLOOR LEVEL OR WORK REQUIRING COMPLEX SCAFFOLDING OR CONSTRUCTION WORK PLATFORMS: Provisions are made in this Contract to compensate the Asbestos abatement contractor for work performed in locations that are difficult to access due to work at elevations that are significantly higher than the normal work level. The unit price for these items will be paid at 1.20 times the unit price described in Paragraphs 1.09, A through R for those portions of the work that are more than twelve (12) feet above the grade for that would be judged as the normal working level.

1.10 GUARANTEE

- A. Work performed in compliance with each task shall be guaranteed for a period of one year from the date the completed work is accepted by the Department of Design and Construction.
- B. The Commissioner of The Department of Design and Construction will notify the Asbestos abatement contractor in writing regarding defects in work under the guarantee.

1.11 OCCUPANCY OF SITE NOT EXCLUSIVE

Attention is specifically drawn to the fact that contractors, performing the work of other Contracts, may be brought upon any of the work sites of this Contract. Therefore, the

Asbestos abatement contractor shall not have exclusive rights to any site of his work and shall fully cooperate and coordinate his work with the work of other contractors who may be brought upon any site of the work of this Contract. This paragraph applies to those areas outside the regulated Work Area as defined by Title 15, Chapter I of RCNY.

1.12 SUBMITTALS

A. Pre-Construction Submittals:

1. Attend a pre-construction meeting scheduled by the City of New York Department of Design and Construction. This meeting shall also be attended by a designated representative of the City of New York third party air monitoring firm, facility manager and the Construction Project Manager. At this meeting, the Asbestos abatement contractor shall present three copies of the following items:
 - a. Asbestos abatement contractor's scope of work, work plan and schedule.
 - b. Asbestos project notifications, approved variances and plans to Government Agencies.
 - c. Copies of Permits, clearance and licenses if required.
 - d. Schedules: the Asbestos abatement contractor shall provide to the Construction Project Manager a copy of the following schedules for approval. Once approved, schedules shall be maintained and updated as received. Asbestos abatement contractor shall post a copy of all schedules at the site:
 - (1) A construction schedule stating critical dates of the project including, but not limited to, mobilization, Work Area preparation, demolition, gross removal, fine cleaning, encapsulation, inspections, clearance monitoring, and phase of refinishing and final inspections. The schedule shall be updated biweekly, at a minimum.
 - (2) A schedule of staffing stating number of workers per shift per activity, name and number of supervisor(s) per shift, shifts per day, and total days to be worked.
 - (3) Submit all changes in schedule or staffing to the Construction Project Manager prior to implementation.

- e. Written description of emergency procedures to be followed in case of injury or fire. This section must include evacuation procedures, source of medical assistance (name and telephone number to nearest hospital) and procedures to be used for access by medical personnel (examples: first aid squad and physician). NOTE: Necessary Emergency Procedures Shall Take Priority Over All Other Requirements of These Specifications.
- f. Material Safety Data Sheets (MSDS) for encapsulants, sealants, firestopping foam, cleaners/disinfectants, spray adhesive and any and all potentially hazardous materials that may be employed on the project. No work involving the aforementioned will be allowed to proceed until MSDS are reviewed.
- g. Worker Training and Medical Surveillance: The Asbestos abatement contractor shall submit a list of the persons who will be employed by him /her to perform the removal work. Present evidence that workers have received proper training required by the regulations and the medical examinations required by OSHA 29 CFR 1926.1101.
- h. Logs: Specimen copies of daily progress log, visitor's log, and disposal log.
 - (1) The Asbestos abatement contractor shall provide a permanently bound log book of minimum 8-1/2" x 11" size at the entrance to the Worker and Waste Decontamination enclosure system as hereinafter specified. Log book shall contain on title page the project name, name, address and phone number of the Asbestos abatement contractor; name, address and phone number of Asbestos abatement contractor and City's third party air monitoring firm; emergency numbers including, but not limited to local Fire/Rescue Department. Log book shall contain a list of personnel approved for entry into the Work Area.
 - (2) All entries into the log shall be made in non-washable, permanent ink and such pen shall be strung to or otherwise attached to the log to prevent removal from the log-in area. Under no circumstances shall pencil entries be permitted. Any significant events occurring during the abatement project shall be entered into the log. Upon completion of the job, the Asbestos abatement contractor shall submit the logbook containing a day-to-day record of personnel log entries countersigned by the Construction Project Manager every day.

GENERAL CONTRACTOR WORK ALLOWANCE FOR INCIDENTAL ASBESTOS ABATEMENT

- i. Worker's Acknowledgments: Submit statements signed by each employee that the employee has received training in the proper handling of ACM, understands the health implications and risks involved; and understands the use and limitations of the respiratory equipment to be used.

B. During Construction Submittals:

1. Security and safety logs showing names of person entering workspace, date and time of entry and exit, record of any accident, emergency evacuation, and any other safety and/or health incident.
2. Progress logs showing the number of workers, supervisors, hours of work and tasks completed shall be submitted daily to the Construction Project Manager.
3. Floor plans indicating Asbestos abatement contractor's current work progress shall be submitted for review by the Construction Project Manager.
4. All Asbestos abatement contractors' air monitoring and inspection results.

C. Project Closeout Submittals:

Upon completion of the project and as a condition of acceptance, the Asbestos abatement contractor shall present two copies of the following items, bound and indexed:

1. Lien Waivers from Asbestos abatement contractor, Sub-Asbestos abatement contractors and Suppliers,
2. Daily OSHA air monitoring results,
3. All Waste Manifests (Asbestos and Construction Debris), seals and disposal logs,
4. Field Sign-In/Sign-Out Logs for every shift,
5. Copies of all Building Department Forms and Permits,
6. A Letter of Compliance stating that all the work on this project was performed in accordance with the Specifications and all applicable Federal, State and Local regulations,
7. All Warranties as stated in the Specifications,
 - a. Fully executed disposal certificates and transportation manifest.

8. Project Record: The Asbestos abatement contractor shall maintain a project record for all small and large asbestos projects. During the project, the project record shall be kept on site at all times. Upon completion of the project, the project record shall be maintained by the building owner. The project record shall be submitted to DDC as part of the close out documents. The project record shall consist of:
 - a. Copies of licenses of all asbestos abatement contractors involved in the project;
 - b. Copies of NYCDEP and NYSDOL supervisor and handler certificates for all workers engaged in the project;
 - c. Copies of all project notifications and reports filed with NYCDEP, NYSDOL and USEPA for the project, with any amendments or variances;
 - d. Copies of all asbestos abatement permits, including associated approved plans and work place safety plan;
 - e. A copy of the air sampling log and all air sampling results;
 - f. A copy of the abatement asbestos abatement contractor's daily log book;
 - g. Copies of all asbestos waste manifests;
 - h. A copy of all Project Monitor's Reports (ACP-15).
 - i. A copy of each ATR-1 Form completed for the asbestos project (if required).
 - j. A copy of each Asbestos Project Conditional Closeout Report (ACP-20) if required.
 - k. A copy of the Asbestos Project Completion Form (ACP-21).

1.13 PROTECTION OF FURNITURE AND EQUIPMENT

Cover all furniture and equipment that cannot be removed from Work Areas. Movable furniture and equipment will be removed from Work Areas by the Asbestos abatement contractor prior to start of work. At the conclusion of the work (after final air testing), the Asbestos abatement contractor will remove all plastic covering on walls, floors, furniture, equipment and reinstall furniture and equipment. He shall remove and store all sheaths, curtains and drapes, and reinstall same following final clean up.

1.14 UTILITIES

A. General:

All temporary facilities shall be subject to the approval of the Commissioner. Prior to starting work at any site, locations and/or sketches (if required) of temporary facilities must be submitted to the Construction Project Manager for the required approval.

B. Water:

The Department of Design and Construction will furnish all water needed for construction, at no cost to the Asbestos abatement contractor in buildings under their jurisdiction. However, it is the responsibility of the Asbestos abatement contractor to ensure that hot water is provided for showering in the decontamination unit. The Asbestos abatement contractor shall furnish, install and maintain any needed equipment to meet these requirements at his own expense.

C. Electricity:

The Department of Design and Construction will furnish all electricity needed for construction, at no cost to the Asbestos abatement contractor in a building, under their jurisdiction. The Asbestos abatement contractor is responsible for routing the electric power to the abatement Work Area.

All temporary lighting and temporary electrical service for Work Area shall be in weatherproof enclosures and be ground fault protected.

D. In leased spaces, arrangements for water supplies and electricity must be made with the landlord. However, all such arrangements must be made through and are subject to approval of the Department of Design and Construction. Utilities will be provided at no cost to the Asbestos abatement contractor. However, it is the Asbestos abatement contractor's (or the General contractor's) responsibility to furnish and install a suitable distribution system to the Work Area. This system will be provided at no cost to the City.

1.15 FEES

The Asbestos abatement contractor shall be responsible for any and all fees or charges imposed by Local, State or Federal Law, Rule and Regulation applicable to the work specified herein, including fees or charges which may be imposed subsequent to the date of the Bid opening.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 049000

MASONRY RESTORATION

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the requirements of the Contract Documents.

1.2 SECTION INCLUDES

- A. Work of this Section includes all labor, materials, equipment and services necessary to complete the masonry restoration as shown on the drawings and/or specified herein, including but not limited to, the following:
 - 1. Re-pointing existing face brick walls.
 - 2. Replacing existing damaged face brick.

1.3 QUALITY ASSURANCE

- A. Field-Constructed Mock-Ups: Prior to start of general masonry restoration, prepare the following sample panels on the building where directed by Commissioner. Retain acceptable panels in undisturbed condition, suitably marked, during construction as a standard for judging completed work.
 - 1. Repointing: Prepare two (2) separate sample areas of approximately 3' high by 6' wide for each type of repointing required, one for demonstrating methods and quality of workmanship expected in removal of mortar from joints and the other for demonstrating quality of materials and workmanship expected in pointing mortar joints.

1.4 SUBMITTALS

- A. Product Data: Submit manufacturers' technical data for each product indicated including recommendations for their application and use and VOC compliance. Include test reports and certifications substantiating that products comply with requirements.
- B. Restoration Program: Submit written program for each phase of restoration process including protection of surrounding materials on building and site during operations. Describe in detail materials, methods and equipment to be used for each phase of restoration work.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Carefully pack, handle, and ship masonry units and accessories strapped together in suitable packs or pallets or in heavy cartons. Unload and handle to prevent chipping and breakage.
- B. Deliver other materials to site in manufacturer's original and unopened containers and packaging, bearing labels as to type and names of products and manufacturers.

- C. Protect masonry restoration materials during storage and construction from wetting by rain, snow or ground water, and from staining or intermixture with earth or other types of materials.
- D. Protect grout, mortar and other materials from deterioration by moisture and temperature. Store in a dry location or in waterproof containers. Keep containers tightly closed and away from open flames. Protect liquid components from freezing. Comply with manufacturer's recommendations for minimum and maximum temperature requirements for storage.

1.6 PROJECT CONDITIONS

- A. Do not repoint mortar joints or repair masonry unless air temperatures are between 40 deg. F. and 80 deg. F. and will remain so for at least forty-eight (48) hours after completion of work.
- B. Prevent grout or mortar used in repointing and repair work from staining face of surrounding masonry and other surfaces. Remove immediately grout and mortar in contact with exposed masonry and other surfaces.
- C. Protect sills, ledges and projections from mortar droppings.

1.7 SEQUENCING/SCHEDULING

- A. Perform masonry restoration work in the following sequence:
 1. Repair existing masonry including replacing existing masonry with new masonry materials.
 2. Rake-out existing mortar from joints indicated to be repointed.
 3. Repoint existing mortar joints of masonry indicated to be restored.

PART 2 PRODUCTS

2.1 MASONRY MATERIALS

- A. Provide face brick to match existing, comply with ASTM C216, Grade SW, Type FBX.
- B. For mortar materials, conform ASTM C270, Type N.
- C. Provide stainless steel helical ties at 16" on center (each way, as applicable).

2.2 MORTAR MIXES

- A. Measuring and Mixing: Measure cementitious and aggregate material in a dry condition by volume or equivalent weight. Do not measure by shovel, use known measure. Mix materials in a clean mechanical batch mixer.
 1. Mixing Pointing Mortar: Thoroughly mix cementitious and aggregate materials together before adding any water. Then mix again adding only enough water to produce a damp, unworkable mix which will retain its form when pressed into a ball. Maintain mortar in this dampened condition for 1-to-2 hours. Add remaining water in small portions until mortar of desired consistency is reached. Use mortar

within thirty (30) minutes of final mixing; do not retemper or use partially hardened material.

- B. Colored Mortar: Produce mortar of color required by use of selected coloring agent.
- C. Do not use admixtures of any kind in mortar, other than colorant.
- D. Mortar Proportions
 - 1. Pointing Mortar for Brick: One part white Portland cement, 2 parts lime and 6 parts colored mortar aggregate. Add colored mortar pigment to product mortar colors required to match.
 - 2. Rebuilding Mortar: Comply with ASTM C 270, Proportion Specification, Type N, with cementitious material content limited to Portland cement-lime and coloring agent.

PART 3 EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where masonry restoration is to be performed and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions have been corrected by the Contractor in a manner acceptable to the Commissioner.

3.2 PROTECTION

- A. General: Comply with instructions and recommendations of manufacturers of products used in the work.
- B. Protect persons, motor vehicles, surrounding surfaces of building whose masonry surfaces are being restored, building site, and surrounding buildings from injury resulting from masonry restoration work.

3.3 BRICK REMOVAL AND REBUILDING

- A. Brick Removal
 - 1. Carefully remove by hand any brick which are damaged, spalled or deteriorated. Cut out full units from joint to joint and in manner to permit replacement with full size units.
 - 2. Support and protect masonry indicated to remain which surrounds removal area.
 - 3. Salvage as many whole, undamaged bricks as possible.
 - 4. Remove mortar, loose particles and soil from salvaged brick by cleaning with brushes and water. Store brick for reuse.
 - 5. Clean remaining brick at edges of removal areas by removing mortar, dust, and loose debris in preparation for rebuilding.
- B. Brick Rebuilding

1. Install new or salvaged brick to replace removed brick. Fit replacement units into bonding and coursing pattern of existing brick. If cutting is required use motor driven saw designed to cut masonry with clean, sharp unchipped edges.
2. Lay replacement brick with completely filled bed, head and collar joints. Butter ends with sufficient mortar to fill head joints and shove into place. Wet clay brick which have ASTM C 67 initial rates of absorption (suction) of more than 30 grams per 30 sq. in. per minute. Use wetting methods which ensure that units are nearly saturated but surface dry when laid. Maintain joint width for replacement units to match existing.
3. Tool exposed mortar joints in repaired areas to match joints of surrounding existing brickwork.

3.4 REPOINTING EXISTING MASONRY

A. Joint Raking

1. Rake out mortar from joints to depths equal to 2-1/2 times their widths but not less than 1/2" nor less than that required to expose sound, unweathered mortar.
2. Remove mortar from masonry surfaces within raked-out joints to provide reveals with square backs and to expose masonry for contact with pointing mortar. Brush, vacuum or flush joints to remove dirt and loose debris.
3. Do not spall edges of masonry units or widen joints. Replace any masonry units which become damaged.
 - a. Cut out old mortar by hand with chisel and mallet.
 - b. Power operated rotary hand saws and grinders will be permitted but only on specific written approval of Commissioner based on submission by Contractor of a satisfactory quality control program and demonstrated ability of operators to use tools without damage to masonry. Quality control program shall include provisions for supervising performance and preventing damage due to worker fatigue.

B. Joint Pointing

1. Rinse masonry joint surfaces with water to remove any dust and mortar particles. Time application of rinsing so that, at time of pointing, excess water has evaporated or run off, and joint surfaces are damp but free of standing water.
2. Apply first layer of pointing mortar to areas where existing mortar was removed to depths greater than surrounding areas. Apply in layers not greater than 3/8" until a uniform depth is formed. Compact each layer thoroughly and allow to become thumbprint-hard before applying next layer.
3. After joints have been filled to a uniform depth, place remaining pointing mortar in three (3) layers with each of first and second layers filling approximately 2/5 of joint depth and third layer the remaining 1/5. Fully compact each layer and allow to become thumbprint hard before applying next layer. Where existing bricks have rounded edges recess final layer slightly from face. Take care not to spread mortar over edges onto exposed masonry surfaces, or to featheredge mortar.

4. When mortar is thumbprint hard, tool joints to match original appearance of joints, unless otherwise indicated. Remove excess mortar from edge of joint by brushing.
5. Cure mortar by maintaining in a damp condition for not less than seventy-two (72) hours.
6. Where repointing work precedes cleaning of existing masonry allow mortar to harden not less than thirty (30) days before beginning cleaning work.

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 05 12 00
STRUCTURAL STEEL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes but is not limited to the following as shown on the drawings and as specified herein:
1. Furnish and deliver for installation by others, anchor bolts, bearing plates and loose lintels with complete instructions and templates to facilitate installation.
 2. Furnish and erect all struts, columns, bearing plates, beams, steel trusses, girders, bracing, hangers and all related connections (bolted and welded).
 3. Openings (unreinforced and reinforced) in structural steel to accommodate mechanical and electrical work.
 4. Shop painting and field touch-up painting.
 5. Erection bracing and supports, including steel wedges, shims or nuts required for leveling base plates.
 6. Lintels and angles attached to structural steel as shown on drawings.
 7. Unless specifically excluded, furnish and install all other items for structural steel work indicated on the drawings, specified, or obviously needed to make the work of this Section complete.
 8. Waste Management
- B. Related Requirements:
1. Division 04 Section "Masonry Restoration"
 2. Division 05 Section "Metal Fabrications."
- C. Related Work Specified Elsewhere
1. Installation of anchor bolts furnished under this section.
 2. Grout under base and bearing plates.
 3. Installation of loose lintels furnished under this section.
 4. Miscellaneous metal work
 5. Stair framing and hangers.
 6. Field painting of structural steel, except as specified herein.

7. Fireproofing systems.

1.3 DEFINITIONS

- A. Structural Steel: Elements of structural-steel frame, as classified by AISC 303, "Code of Standard Practice for Steel Buildings and Bridges."
- B. Seismic-Load-Resisting System: Elements of structural-steel frame designated as "SLRS" or along grid lines designated as "SLRS" on Drawings, including columns, beams, and braces and their connections.
- C. Heavy Sections: Rolled and built-up sections as follows:
 - 1. Shapes included in ASTM A 6/A 6M with flanges thicker than 1-1/2 inches .
 - 2. Welded built-up members with plates thicker than 2 inches .
 - 3. Column base plates thicker than 2 inches .
- D. Protected Zone: Structural members or portions of structural members indicated as "Protected Zone" on Drawings. Connections of structural and nonstructural elements to protected zones are limited.
- E. Demand Critical Welds: Those welds, the failure of which would result in significant degradation of the strength and stiffness of the Seismic-Load-Resisting System and which are indicated as "Demand Critical" or "Seismic Critical" on Drawings.

1.4 PERFORMANCE REQUIREMENTS

- A. Connections: Provide details of all connections required by the drawings to be completed by structural steel fabricator (including comprehensive engineering analysis by a qualified professional engineer) to withstand loads indicated and comply with other information and restrictions indicated, unless noted otherwise.
 - 1. Select and complete connections using schematic details indicated and AISC 360.
 - 2. Use design method indicated on structural drawings.
 - 3. Moment Connections: Fully restrained unless otherwise noted on drawings.
- B. Lateral Framing Resisting System: Type used is indicated on structural drawings.

1.5 SUBMITTALS

- A. Product Data: Submit data for each type of product indicated in the contract documents.
- B. Shop Drawings: Submit shop drawings in accordance with the specifications as

follows:

1. Show clearly all work, including relationship of structural steel to the adjacent work of other trades and to significant lines of finishes of other trades.
2. Do not fabricate or deliver work to the site before drawings reviewed by the Commissioner and Architect/Engineer of Record have been returned.
3. Before preparing steel shop drawings, submit proposed submittal schedule for review by Commissioner and Architect/Engineer of Record.
4. Before preparing steel shop drawings, submit for review a set of job standards showing all necessary joint details with full particulars of connection pieces, shop and field welds, and holes for erection bolts and permanent bolts. These shall include any moment and shear connections. Appropriate marks for designating all types and sizes of joint details shall be included. After approval of these job standards, the erection plans are to be submitted and shall be marked to indicate unmistakably the type and size of joint to be used for every beam connection. Do not order steel in advance of approval of the job standards and the erection plans with joint marks, except at own risk
5. Shop drawings shall be selected or completed by an experienced steel detailer.
6. Prepare remainder of steel shop drawings after approval of job standards and erection plans. Drawings submitted prior to approval of job standards will be returned without review.
7. Prepare shop drawings in conformance with the applicable procedures shown in "*Detailing for Steel Construction*," latest edition, published by AISC. Prepare shop drawings under the supervision of an experienced detailer. During the preparation of shop drawings, and prior to submittal, coordinate and cross check all shop drawings, including those prepared by subcontractors, for compliance with the Contract Documents.
8. Indicate clearly the size and grade of steel for each component. Identify rolled shapes, tubes and plates by using the standard designations used in "*Steel Construction Manual*" Latest Edition, by AISC.
9. Indicate welds and nondestructive tests by using the symbols conforming to AWS A2.4 "Symbols for Welding and Nondestructive Testing." Where necessary for clarity, indicate welding procedure designations or other data in the tail of the welding symbol.
10. Show explicitly the type of connection used in each location, the grade, size, and number of bolts; the type, number, position, designation and orientation of each washer; and the size of each hole, whether slotted or round. Ensure that adequate wrench clearance for correct bolt tightening is provided and note special bolt tightening sequences where applicable and necessary.
11. Show all camber dimensions in the shop drawings. Where specific camber is not shown in the drawings, note on each affected shop drawing that such members are to be fabricated with the natural camber up.
12. Show holes required for securing work specified in other sections to structural steelwork, as well as all holes required for passage through structural steelwork of work of other trades. Provide field work drawings for all such holes not shown in shop or erection drawings. Addition of, or change in size or location of openings will not be permitted without prior approval.
13. Use bolted connections wherever possible; avoid field welding unless otherwise

- noted on drawings.
14. Make details in such a way as to avoid having steel, connections, bracing, bolts, etc., interfere with architectural details or in any way reduce the areas of shafts, openings, clearances, etc.
 15. Detail and schedule cleaning and painting data and requirements, including specific indication of "no-paint" areas.
 16. The use of the Commissioner's or Engineer of Record's electronic drawing files as a base for the erection shop drawings will be permitted at the request of the structural steel detailer upon completion and return of the waiver form. The use of the Commissioner's or Engineer of Record's electronic drawing files as a base for shop drawing details will not be permitted. The structural steel detailer will be responsible for compatibility of the files with his hardware or software. The electronic files are not to be considered the contract documents, the design team makes no representation regarding the accuracy or completeness of the electronic files given to the structural steel detailer and their use will be at the structural steel detailer's sole risk and without liability to the design team. The structural steel detailer shall remove the project title box and all references to the structural drawings including drawing numbers and structural drawing sections and details. The structural steel detailer shall also remove all reference to work not included in the steel contract.
 17. Scaling of the Commissioner's or Engineer of Record's drawings is not permitted. This applies to hard paper, electronic, and all other versions.
 18. Show clearly the size and location of each member and the erection mark assigned to each member. Show each field connection with all data and details necessary for assembling the structure. Direct special attention to the possible need for special guying, bracing, or shoring to prevent deformation of existing or new structure due to stresses caused by erection procedures and equipment, by construction loadings, and by forces of natural phenomena.
 19. Prepare, keep up-to-date, and submit a complete drawing index cross-referencing each assigned piece mark with the drawing number in which the piece is detailed. Detail drawings submitted without an up-to-date index and the applicable erection drawing(s) showing the location of each piece will be deemed an incomplete submission and will not be accepted as subject to any agreed shop drawing review schedule.
 20. Submit, in writing, any proposed deviations from the Contract Documents, prior to the submission of shop drawings showing the proposed deviation. Submit requests for deviations on the steelwork subcontractor's letterhead. Deviations not identified, or identified only in letters of transmittal or in shop drawings or both, without the required written request, may not be accepted, and shall be sufficient cause for the Commissioner to return each shop drawing containing such deviations without further action. Acceptance of shop drawings containing deviations not detected by the Commissioner during shop drawing review shall not relieve the steelwork subcontractor from responsibility to conform strictly to the Contract Documents.
 21. Prior to resubmission of shop drawings with additions or corrections, circle or bubble and identify all changes. Drawings submitted without each change being clearly identified are subject to return for resubmission.

22. Prior to making shop drawings for any portion of the work involving alterations to an existing structure, make all necessary field observations, measurements and surveys of existing conditions. If probes are required to accomplish such measurements, give timely notice where probes will be required.
- C. Submit certified copies of each survey conducted by a surveyor licensed by the state in which the construction is to take place and employed by the structural steel subcontractor. Survey shall show elevations and locations of base plates and anchor bolts to receive structural steel, and final elevations and locations for major members. Indicate discrepancies between actual installation and Contract Documents.
- D. Reports:
1. Submit certified copies of mill test reports for all steel furnished. Perform mechanical and chemical tests for all material regardless of thickness or use.
 2. Submit mill and fabricator certification of compliance with ISO14001.
 3. Submit anchor bolt checking certification as required.
 4. Submit qualification certificates of all welders who will perform work on the project.
 5. Submit survey of erected steelwork as required.
- E. Submit verification of bio-degradable or low VOC, and low Hazardous Air Pollutants (HAPS) cleaning solutions. Provide a cut sheet for all cleaning solutions used in the surface preparation of steel components. Highlight VOC limits and chemical component limits.

1.6 QUALITY ASSURANCE

- A. Except as modified by this specification, comply with the applicable provisions and recommendations of the following codes and standards:
1. New York City Building Code, Latest Edition
 2. AISC "Specification for the Design, Fabrication and Erection of Structural Steel for Buildings".
 3. AISC "Code of Standard Practice for Steel Buildings and Bridges" latest edition.
 4. AISC "Seismic Provisions for Structural Steel Buildings", latest edition.
 5. Industrial Fasteners Institute "Handbook of Bolt and Bolted Joints" latest edition.
 6. RCSC "Specifications for Structural Joints Using ASTM A 325 or A 490 Bolts."
 7. ASTM A 6 "General requirements for rolled steel plates, shapes, sheet piling and bars for structural use".
 8. AWS D1.1, "Structural Welding Code."
 9. AWS A5.18 & A5.28, Structural Welding Code for GMAW
 10. SSPC "Painting Manual, Volume 2, Systems and Specifications.", Latest edition.
- B. Qualifications for welding work shall be as follows:
1. Qualify welding procedures and welding operators in accordance with the AWS

"Standard Qualification Procedure."

- a. Include amended requirements of the building code as noted above.
- 2. Submit certification that all welders to be employed in work are AWS qualified. If re-certification of welders is required, retesting will be responsibility of structural steel subcontractor.
 - a. Include licensing requirements as per the building code noted above and local jurisdiction.
- C. The bidder must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.

1.7 TESTING AND INSPECTION

- A. Special Inspection as required by the applicable Building Code of all structural steelwork in the shop and field will be performed by an inspection agency retained by the Commissioner at no expense to the Contractor. The inspection agency shall work under the direction of the Commissioner. Contractor shall provide the inspection agency with the following:
 - 1. Schedule of all work in both shop and field with at least ten days' written notice before commencement of either activity.
 - 2. A complete set of approved shop and erection drawings.
 - 3. Cutting lists, order sheets, material bills, shipping bills and mill test reports.
 - 4. Information as to time and place of all rollings and shipment of material to shops.
 - 5. Representative sample pieces as requested by the testing agency.
 - 6. Full and ample means and assistance for testing all material.
 - 7. Proper facilities, including scaffolding, temporary work platforms, etc., for inspection of the work in the mills, shop and field.
- B. Each person installing connections shall be assigned an identifying symbol or mark and all shop and field connections shall be so identified so that the inspector can refer back to the person making the connection.
- C. The following minimum criteria shall be adhered to in testing of welds and bolts:
 - 1. All welds and bolts shall be examined by visual means.
 - 2. 25% of all welds, selected randomly, shall be measured.
 - 3. 25% of all bolts, selected randomly, shall be checked with calibrated torque wench.
 - 4. In addition, all welds subject to tensile stress shall be examined by the Ultrasonic Method for 100% of their length.
 - 5. 10% of all manual fillet welds shall be tested by the magnetic particle method.
 - 6. 1'-0" at each end of automatic fillet welds shall be tested by the magnetic particle

- method.
7. 100% of groove welds shall be tested by the ultrasonic method.
- D. Shop inspection will include examination of steel for straightness and alignment, fissures, mill scale, and other defects and deformities, as described in ASTM A6, examination of fabricated pieces for conforming to approved shop drawings, testing of bolts and welds, and inspection of shop painting. All shop welds shall be visually inspected and spot tested using Ultrasonic Method ASTM E 114 and AWS, Chapter 6, Part C. All inspected welds shall be identified by the inspector.
 - E. Field inspection will include examination of erected steel for welding, proper fitting and tensioning of bolts, alignment, trueness and plumbness, touching-up of shop coat, level of billets and base plates.
 - F. Inspection of welding will be such as to assure that the work is within the quality requirements specified below and elsewhere in this section of the specifications and will include:
 1. Ascertainment that the electrodes and flux used for the SAW, GMAW and FCAW welding processes conform to the requirements of this section of the specifications.
 2. Ascertainment that the approved welding procedures and sequence are followed without deviation, unless specific approval for change is obtained from the Engineer of Record.
 3. The testing agency shall be prepared to utilize the following approved methods of testing:
 - a. Liquid penetrant inspection: ASTM E 165.
 - b. Magnetic particle: ASTM E 1444.
 - c. Radiographic inspection: ASTM E 94 and E 1032.
 - d. Ultrasonic inspection: ASTM E 114 and AWS, Chapter 6, Section C.
 - G. When defects are revealed, additional inspection by whatever method is deemed necessary by the inspector, shall be performed to the extent necessary to assure that the full amount of defect has been located. No further work shall be done on the assembly or sub-assembly in question until all the necessary corrections have been made. Defects shall be repaired, using the same welding procedure that was used initially in making the weld, unless otherwise approved by the Engineer of Record. Inspection of the repaired weld shall be by the same method that was used to reveal the defect. A second repair of a defective area shall not be made without approval of the Engineer of Record.
 - H. Apparatus and procedure for measuring torque and tension in high strength bolts and for calibrating wrenches shall be furnished and maintained by steel contractor, and shall be approved by the inspection agency. Wrenches shall be calibrated each day at the beginning of the work, each time the bolt size or length of pressure hose is changed, and at such other times as the inspection agency may direct. Periodic checks of high strength steel bolt connections will be made in the field by the

inspection agency. The steel contractor shall maintain at all times during erection a manual torque wrench, and shall provide a laborer and scaffolding as required for the testing of connections by the inspection agency, and shall at his own expense, furnish such facilities and provide such assistance as may be required for proper inspection.

- I. A distinguishing mark will be placed on all work that has been inspected and approved. Material or work that is not acceptable will be designated by words such as "REJECT" or "REPAIR" marked directly on the material or work.
- J. Inspection of Shop Painting:
 - 1. Visually evaluate surface preparation by comparison with pictorial standards in accordance with SSPC-Vis 1.
 - 2. Measure dry film thickness of each coat with a magnetic film thickness gauge in accordance with SSPC-PA 2.
 - 3. Visually inspect dried film for runs, sags, dry spray, overspray and missed areas.
 - 4. Repair defective or damaged areas in accordance with painting requirements specified. Architecturally exposed structural steel shall be free of runs and holidays. Make repairs to shop or field coat as directed.

1.8 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to site at such intervals to ensure uninterrupted progress of work. Minimize the disturbances to site and soil conditions.
- B. Deliver anchor bolts and anchorage devices, which are to be embedded in cast-in-place concrete, in ample time not to delay work.
- C. Store materials to permit easy access for inspection and identification. Keep steel members in a safe, dry, off ground location, using pallets, platforms, or other supports. Protect steel members and packaged materials from corrosion and deterioration, discoloration or staining.
- D. Do not store materials on structure in a manner that might cause distortion or damage to members of supporting structures. Repair or replace damaged materials or structures as directed.

1.9 PROJECT CONDITIONS

- A. The structural steel contractor shall coordinate the structural steel work with the work of other Contracts. Verify all dimensions and details of this Contract and those of other Contracts that affect the work before proceeding. Any discrepancies shall be immediately reported to the Commissioner.
- B. Be fully responsible for the accurate installation of the work. Any discrepancy which arises from his failure to execute the work in conformity to the drawings and

specifications shall be properly remedied at the contractor's own expense and in a manner acceptable to the Commissioner.

- C. Locate dimensionally on setting plans all anchor bolts, inserts, bearing and base plates, etc., and prepare and deliver all required templates and fully dimensioned setting plans in time for the proper execution of the work. Anchor bolts shall be set by another subcontractor. The structural steel contractor shall check all such settings for correctness after they have been cast in place, and before proceeding with erection work.
- D. Report to the Commissioner and certify compliance with the above checking requirements in writing and indicate any inaccuracies found in the location of anchor bolts or inserts, and corrections which must be made to their installation. Any inaccuracies not included in the report and found during or after steel erection shall be the responsibility of the structural steel contractor and the cost of corrective measures shall be borne by him.
- E. Use base lines, bench marks, or other standards for survey work that have been provided or verified by others. If permanent building bench marks have been established, these will be used for field checking.
- F. Coordinate with all other trades to insure that work of this section does not cause undue conflict. Insure that location of erection devices such as cranes, derricks, booms or hoists, does not cause over-stresses to steel frame to work previously placed by other trades or to existing structures. When required, retain the services of a licensed professional engineer to ascertain that erection devices do not create unsafe conditions or cause overstresses.
- G. Ensure full co-ordination with other related trades and professions.

1.10 SUBSTITUTION

- A. Commissioner reserves the right to require substitute shapes of other sizes than those indicated on the drawings when it is apparent that the shapes specified cannot be furnished within the time required for the progress of construction. Make said substitutions without additional cost to the Commissioner.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel shapes, including structural steel wide flange and structural tee rolled shapes, channels, angles, plates, pipe, and hollow structural sections: As noted on structural drawings.

- B. High Strength Bolts:
1. Slip-critical bolts as noted on structural drawings, with hardened washers
- C. Anchor Bolts: As noted on structural drawings
- D. Filler metal for welding electrodes. As noted on structural drawings.
- E. Structural steel primer paint: rust inhibitive primer conforms to the following criteria
1. Demonstrate a minimum of adhesion as classified by 4B of ASTM D 3359 method A
 2. Demonstrate a minimum opacity as determined by ASTM D 2805
 3. Demonstrate corrosion resistance per standards ASTM B 117 & ASTM D 5894
 4. "Slip Critical" compatible rating where applicable
 5. The product shall not contain any of the prohibited compounds as listed in Green Seal *Standard for Paintings and Coatings*, GS-11, latest edition and in Master Painters Institute (MPI) *Green Performance Standard*, GPS-1-08.
 6. The product shall meet the VOC limits as set forth in the MPI Green Performance Standard, GPS-1-08, with a maximum allowable VOC of 340 g/L for rust preventative coatings. Limits are expressed in THINNED state. Preference shall be given to products with the least crystalline silica content.
 7. The product shall meet all the requirements of MPI Standards: 23, 26, 76, 79, 95, 107, 135, 173, 275. Products not listed with MPI are acceptable if and only if they meet the same environmental criteria for the same product category.
 - a. Exterior exposed steel, normal conditions: Use alkyd or polyamide solvent based paints (MPI #'s 76, 79 & 101)
 - b. Interior exposed steel: Use water based paint (MPI # 107)
 - c. All steel to receive intumescent fireproofing, use primer acceptable to manufacturer of intumescent coating.
- F. Structural steel field paint for exposed members: rust inhibitive primer conforms to the following criteria
1. Demonstrate a minimum of adhesion as classified by 4B of ASTM D 3359 method A
 2. Demonstrate a minimum opacity as determined by ASTM D 2805
 3. Demonstrate corrosion resistance per standards ASTM B 117 & ASTM D 5894
 4. "Slip Critical" compatible rating where applicable.
 5. The product shall not contain any of the prohibited compounds as listed in Green Seal *Standard for Paintings and Coatings*, GS-11, latest edition and in the Master Painters Institute *Green Performance Standard*, GPS-1-08.
 6. The product shall meet the VOC limits as set forth in the MPI Green Performance Standard, GPS-1-08, with a maximum allowable VOC of 400 g/L for rust preventative coatings. Limits are expressed in THINNED state. Preference shall be given to products with the least crystalline silica content.
 7. The product shall meet all the requirements of MPI Standards: 23, 26, 76, 79, 95,

107, 135, 173, 275. Products not listed with MPI are acceptable if and only if they meet the same environmental criteria for the same product category. Products not listed with MPI are acceptable if and only if they meet the same environmental criteria for the same product category.

- a. Exterior exposed steel, normal conditions: Use alkyd or polyamide solvent based paints (MPI #'s 23, 79)
- b. Interior exposed steel: Use water based paint (MPI # 107)

PART 3 - EXECUTION

3.1 FABRICATION

- A. All shop connections shall be high strength bolted unless specifically shown otherwise. Fabricate work in shop in as large assemblies as practicable. Use welded connections ONLY where shown on drawings. If a bolted connection is not possible obtain written approval from the Engineer of Record for the welded connection.
- B. Camber: As indicated on drawings.
- C. Mill column ends and bearing stiffeners to give full bearing over the cross section. Plane contact surfaces of bearing plates when required by the AISC Specifications. It is not necessary to plane bottom surfaces of plates on grout beds.
- D. Drill or punch holes at right angles to the surface of the metal, not more than 1/16" larger than the connector diameter. Do not make or enlarge holes by burning. Drill material having a thickness in excess of the connector diameter and material thicker than 7/8". Holes shall be clean-cut without torn or ragged edges. Remove outside burrs resulting from drilling operations.
- E. Provide holes in members to permit connection of the work of other trades. Use suitable templates for proper location of these holes. Steel requiring adjustment or accurate alignment shall be provided with slotted holes or full bearing shims as shown.
- F. Provide holes, slots and openings required by other trades together with necessary reinforcing required. Use suitable templates for proper location of these openings. All such openings shall be shown on the shop drawings. No change in size or location will be permitted without prior approval.
- G. Manual flame cutting shall be done only with a mechanically guided torch. An unguided torch may be used provided the cut is within 1/8" of the required line.

3.2 SHOP CONNECTIONS

- A. Provide connections as shown on the drawing exactly as detailed. Where connections

are not detailed, the minimum connections shall comply with appropriate tables headed, "Framed Beam Connections" shown in the AISC "Manual of Steel Construction" unless otherwise noted on the drawings. Use high strength bolts unless otherwise shown.

- B. Do not use welded connections unless shown on details. Field welding is not allowed without written instruction from the Engineer of Record.
- C. Proportion and detail all connections on shop drawings to resist forces shown on design drawings. If no reactions are indicated on design drawings, design connections for non-composite beams to resist the end reaction shown in the AISC tables for Uniform Load Constants for Beams. Connections for composite beams shall be proportioned to resist 150% of the above mentioned tabulated load.
- D. Bolting
 - 1. Bolts shall be of a length that will extend not less than 1/4" beyond the nuts. Enter bolts into holes without damaging the thread.
 - 2. Use high-strength bolts in friction as shown. Make high-strength bolted joints without the use of erection bolts. Bolt heads and nuts shall rest squarely against the metal. Where structural members have sloping surface, bolted connections shall be provided with beveled washers to afford square seating or framing for bolt heads or nuts. Bring members tightly together with sufficient high-strength "fitting-up" bolts which shall be retightened as all the bolts are finally tightened. Manual torque wrenches will not be accepted for final tightening. Protect bolt heads from damage during placing. Final tightening of high-strength bolts shall be by properly calibrated power torque wrenches. Bolts that have been completely tightened shall be marked for identification.
- E. Welding
 - 1. The following environmentally preferable welding processes shall be used as described for the related application without exception:
 - a. Submerged Arc Welding (SAW): Plate girders, fillet and butt joints in pipes, cylinders, columns and beams, and welds where 'downhand' or horizontal positions are possible.
 - b. Gas Metal Arc Welding (GMAW) shall be used where SAW is not applicable (such as for angled connections and anything irregular or short).
 - c. Field welding shall be allowed only in special circumstances; in such cases Flux Core Arc welding (FCAW) shall be specified
 - 2. Do not begin structural welding until joint elements are inspected for surface preparation, fit-up, and cleanliness of surface to be welded and are then bolted or tacked in intimate contact and adjusted to dimensions shown on drawings, or both, with allowance for any weld shrinkage that is expected. No members are to be spliced without prior approval by the Engineer of Record.

- a. Containment surface preparation debris must meet SSPC-Guide 6 guidelines.
3. Pre-heat and interpass temperature shall be in accordance with Table 4.2 (including footnotes) of the AWS Code for Welding in Building Construction. The temperature shall be measured from the side opposite to that which the pre-heat is applied, where possible.
4. All groove welds shall be continuous and full penetration welds unless otherwise shown on the design drawings. Welds made without the aid of a back-up bar shall have their roots chipped, ground or roughened out to sound metal from the second side, before welding is done from the second side.
5. All welds shall be sound throughout. There shall be no crack in any weld or weld pass. Weld may be considered sound if it contains only slight porosity or fusion defects which are well dispersed.
6. The heat, input, length of weld and sequence of weld shall be controlled to prevent distortions. The surfaces to be welded and the filler metals to be used shall be subject to inspection before any welding is performed.

3.3 SHOP PAINTING AND CLEANING

A. Finishing, coating, plating

1. Shop painting and factory finishing shall be preferred to field painting whenever possible. Where applicable, finishes and surface preparations based on a physical process such as abrasive blasting, grinding, buffing and polishing are preferred to coatings and solvent based cleaning. Where coatings are necessary powder-coated fabrication is preferred to painting and plating. Avoid plated metals especially those using cadmium and chromium as plate material or cyanide or copper/formaldehyde based electroless copper as the plating solution.

B. Remove all rust, scale, grease and other detrimental foreign matter in accordance with SSPC-SP 3, Power Tool Cleaning, unless conditions/opportunities listed below apply.

1. Use surface preparation classification recommended by paint manufacturer, SSPC or Master Painters Institute (MPI) for paint product used.
 - a. SSPC-Guide 6, Guide for Containing Debris Generated During Paint Removal Operations, must be followed for all applicable surface preparation techniques.

C. Immediately after surface preparation, apply structural steel primer paint where specified, in accordance with manufacturer's instructions and at a rate to provide dry film thickness of not less than 2.0 mils. Use painting methods which result in full coverage of joints, corners, edges and exposed surfaces. Use type of primer paint as specified in "Materials" article above. Apply two coats to surfaces that will be inaccessible after erection

- D. Paint all structural steel in accordance with the foregoing specification, except as follows:
1. Within 2" of field welds or welds made after paint is applied.
 2. Within 3" of high strength friction bolts.
 3. Machined surfaces and threaded parts required for adjustment of the structure. Protect these with suitable rust inhibiting coating which may be removed after final installation of the work so that proper finished coatings may be applied.

3.4 GALVANIZING

- A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel according to ASTM A 123/A 123M.
1. Fill vent and drain holes that will be exposed in the finished Work unless they will function as weep holes, by plugging with zinc solder and filing off smooth.

3.5 SOURCE QUALITY CONTROL

- A. Refer to testing and inspection requirements specified above.

3.6 EXAMINATION

- A. Verify field measurements prior to start of erection. Check the alignment and elevation of all column supports and location of all anchor bolts with transit and level instruments before starting erection. Notify Commissioner of any errors. Obtain Commissioner's approval of methods proposed for correcting errors prior to proceeding with corrections and erection.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.7 PREPARATION

- A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated.

3.8 ERECTION

- A. Set structural steel accurately in locations and to elevations indicated and according to AISC 303 and AISC 360.

- B. Maintain erection tolerances of structural steel within AISC's "Code of Standard Practice for Steel Buildings and Bridges."
- C. Column billets and bearing plates shall be supported and aligned on steel wedges, shims, or leveling nuts. After the supported members have been plumbed and properly positioned by instrument and anchor nuts tightened, the entire bearing area under the plate shall be packed solidly with grout specified in another Section. Wedges and shims shall be set back a minimum of 3/4" from the edges of plates and shall be left in place. Leveling plates are not permitted.
- D. Plumbing, Leveling and Bracing
 - 1. Structural steel shall be erected true and level, and temporary bracing shall be introduced wherever necessary to provide for all loads to which the structure may be subjected, including equipment and the operation thereof. Such bracing shall be left in place as long as may be required for safety. No welding shall be done or bolts drawn up tight until structural steel has been properly aligned. Obtain approval for guy locations to assure lack of interference with operations of other trades.
- E. Drifting
 - 1. Light drifting necessary to draw holes together will be permitted, but drifting of unfair holes will not be permitted. Twist drills shall be used to enlarge holes as necessary to the next larger size; use next larger size bolts as required. Reaming that weakens the members, or make it impossible to fill the holes properly or to adjust accurately after reaming, will not be allowed.

3.9 FIELD CONNECTIONS

- A. In addition to the requirements for shop connections comply with the following:
 - 1. High-Strength Bolts: Install high-strength bolts according to RCSC's "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts" for type of bolt and type of joint specified.
 - 2. Joint Type: As noted on structural drawings.
- B. Weld Connections: Comply with AWS D1.1/D1.1M[and AWS D1.8/D1.8M] for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.
 - 1. Comply with AISC 303 and AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
 - 2. Assemble and weld built-up sections by methods that will maintain true alignment of axes without exceeding tolerances in AISC 303 for mill material.
 - 3. Electrodes shall be AWS A5.1, Class E7018, with a minimum weld metal strength of 72 ksi, for welding to existing steel.

3.10 REPAIRS AND PROTECTION

- A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing and repair galvanizing to comply with ASTM A 780.
- B. Touchup Painting: Immediately after erection, clean exposed areas where primer is damaged or missing and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
 - 1. Clean and prepare surfaces by SSPC-SP 3, Power Tool Cleaning.
- C. After erection, all damaged areas in shop coat, exposed surfaces of bolt heads, nuts and washers, and all field welds and unpainted areas adjacent to field welds and high strength bolts shall be painted with a "touch-up" application of same paint used in the shop coat and then painted with same paint used for shop coat tinted another color. Retouch in field, any scraped, abraded, and unpainted surfaces. Painting shall be as specified for shop coats.
- D. Structural steel which is to support mechanical equipment and will be left exposed to the weather in the finished project shall be field painted with one coat of anti-corrosive paint as described in Part 2 for Paint Materials.

3.11 WASTE MANAGEMENT

- A. Close and seal tightly all partly used paint and finish containers and store protected in a well-ventilated, fire-safe area at moderate temperature.
- B. Designated un-used paint for:
 - 1. Immediate re-use
 - 2. Long term maintenance needs
 - 3. Recycling by an appropriate facility.
 - 4. Donation
- C. Place empty containers of solvent-based paints in areas designated for hazardous materials.
- D. Do not dispose of paints or solvents by pouring on the ground. Place amounts too small to re-use in designated containers for proper disposal
- E. Place materials defined as hazardous or toxic waste in designated containers.

END OF SECTION

SECTION 055000

METAL FABRICATIONS

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the requirements of the Contract Documents.

1.2 SECTION INCLUDES

- A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the miscellaneous metal work as indicated on the drawings and/or specified herein, including, but not limited to, the following:

1. Rough hardware.
2. Ship's ladders.
3. Steel pipe handrails and railings.
4. Diamond plate steel panels at loading gallery walking surfaces, ship's ladder treads, and ship's ladder landings.
5. Roof access ladder.
6. Light steel framing and supports, not included as part of work of other trades.
7. Steel framing, bracing, supports, anchors, bolts, shims, fastenings, and all other supplementary parts indicated on drawings or as required to complete each item of work of this Section.
8. Prime painting, touch-up painting, galvanizing and separation of dissimilar metals for work of this Section.
9. Shop-applied finish coating of ships ladder and structural supports.
10. Cutting, fitting, drilling and tapping work of this Section to accommodate work of other Sections and of concrete, masonry or other materials as required for attaching and installing work of this Section.

1.3 RELATED SECTIONS

- A. Structural steel - Section 051200.
- B. Painting - Section 099000.

1.4 QUALITY ASSURANCE

- A. Field Measurements: Take field measurements prior to preparation of shop drawings and fabrication, where possible. Do not delay job progress; allow for trimming and fitting where taking field measurements before fabrication might delay work.

- B. Shop Assembly: Pre-assemble items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- C. Reference Standards: The work is subject to requirements of applicable portions of the following standards:
 - 1. "Manual of Steel Construction," American Institute of Steel Construction.
 - 2. AWS D1-1 "Structural Welding Code," American Welding Society.
 - 3. SSPC SP-3 "Surface Preparation Specification No. 3, Power Tool Cleaning," Steel Structures Painting Council.
 - 4. SSPC PA-1 "Painting Application Specification," Steel Structures Painting Council.
 - 5. "Handbook on Bolt, Nut and Rivet Standards," Industrial Fasteners Institute.
- D. Steel Materials: For steel to be hot dip-galvanized, provide steel chemically suitable for metal coatings complying with the following requirements: carbon below 0.25 percent, silicon below 0.24 percent, phosphorous below 0.05 percent, and manganese below 1.35 percent. Notify galvanizer if steel does not comply with these requirements to determine suitability for processing.
- E. Inspection and testing of hot-dip galvanized coating shall be done under the guidelines provided in the American Hot-Dip Galvanizers Association (AGA) publication "Inspection of Products Hot-Dip Galvanized After Fabrication."
- F. The bidder must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.

1.5 PERFORMANCE STANDARDS

- A. Stairs and railings shall be constructed to conform to the following performance standards:
 - 1. Stairs and platforms shall support a live load of one hundred (100) psf and a concentrated live load of three hundred (300) lbs. and shall have a live load deflection limited to 1/360 of the span. Loads shall not apply simultaneously.
 - 2. Railings shall be designed to resist loads per New York City Building Code.

1.6 SUBMITTALS

- A. Manufacturer's Literature: Submit manufacturer's specifications, load tables, dimension diagrams, anchor details and installation instructions for products to be used in the fabrication of miscellaneous metal work, including paint products.
- B. Shop Drawings: Shop drawings for the fabrication and erection of all assemblies of miscellaneous iron work which are not completely shown by manufacturer's data sheets. Include plans and elevations at not less than 1" to 1'-0" scale, and include details of sections and connections at not less than 3" to 1'-0" scale. Show anchorage and accessory items.

1. Shop drawings shall be prepared by an experienced steel detailer in conformance with the applicable procedures shown in "Detailing for Steel Construction," latest edition, published by AISC.
 2. During the preparation of shop drawings, and prior to submittal, coordinate and cross check all shop drawings, including those prepared by other subcontractors, for compliance with the Contract Documents.
- C. Welding shall be indicated on shop drawings using AWS symbols and showing length, size and spacing (if not continuous). Auxiliary views shall be shown to clarify all welding. Notes such as 1/4" weld, weld and tack weld are not acceptable.
- D. Certification: For items to be hot-dip galvanized, identify each item galvanized and to show compliance of application. The Certificate shall be signed by the galvanizer and shall contain a detailed description of the material processed and the ASTM standard used for the coating and, the weight of the coating. In addition, and as attachment to Certification, submit reports of testing and inspections indicating compliance with the provisions of this Section.

PART 2 PRODUCTS

2.1 MATERIALS

A. Metals

1. Metal Surfaces, General: For fabrication of miscellaneous metal work which will be exposed to view, use only materials which are smooth and free of surface blemishes including pitting, seam marks, roller marks, rolled trade names and roughness.
2. Steel Plates, Shapes and Bars: ASTM A 36.
3. Steel Bar Grating: ASTM A 1011/A or ASTM A 36.
4. Steel Tubing: Cold formed, ASTM A 500; or hot rolled, ASTM A 501.
5. Structural Steel Sheet: Hot rolled, ASTM A 570; or cold rolled, ASTM A 611, Class 1; of grade required for design loading.
6. Galvanized Structural Steel Sheet: ASTM A 924, of grade required for design loading. Coating designation G90.
7. Diamond Plate: ASTM A768, hot rolled, thickness as shown on drawings.
8. Steel Pipe: ASTM A 53, type and grade as selected by fabricator and as required for design loading; black finish unless galvanizing is indicated; standard weight (Schedule 40), unless otherwise indicated.
9. Gray Iron Castings: ASTM A 48, Class 30, unless another class is indicated or required by structural loads.
10. Malleable Iron Castings: ASTM A 47, grade as selected by fabricator.
11. Brackets, Flanges and Anchors: Cast or formed metal of the same type material and finish as supported rails, unless otherwise indicated.

12. Concrete Inserts: Threaded or wedge type; galvanized ferrous castings, either malleable iron, ASTM A 47, or cast steel, ASTM A 27. Provide bolts, washers and shims as required, hot-dip galvanized, ASTM A 153.
 13. Non-shrink grout shall be "Euco NS" by the Euclid Chemical Co., or "Masterflow 713" by Master Builders, Sika or approved equal. The factory pre-mixed grout shall conform to ASTM C1107. In addition, the grout manufacturer shall furnish test data from an independent laboratory indicating that the grout shall achieve 95% bearing contact under a 48" x 48" base plate when placed at a fluid consistency
- B. Fasteners
1. General: Provide zinc-coated fasteners for exterior use or where built into exterior walls. Select fasteners for the type, grade and class required.
 2. Bolts and Nuts: Regular hexagon head type, ASTM A 307, Grade A.
 3. Anchor Bolts: ASTM F 1554, Grade 36.
 4. Lag Bolts: ASME B18.2.1.
 5. Machine Screws: ASME B18.6.3.
 6. Plain Washers: Round, carbon steel, ASME B18.22.1.
 7. Masonry Anchorage Devices: Expansion shields, FS FF-S-325.
 8. Toggle Bolts: Tumble-wing type, FS FF-B-588, type, class and style as required.
 9. Lock Washers: Helical spring type carbon steel, ASME B18.21.1.
- C. Shop Paint: Shop prime all non-galvanized miscellaneous metal items using Series 88 Azeron Primer made by Tnemec, ICI Devco "Rust Guard" quick dry alkyd shop coat No. 41403, or "Interlac 393" by International Protection Coatings or approved equal.
- D. Bituminous Paint: Cold applied asphalt emulsion complying with ASTM D 1187.
- E. Galvanize Repair Coating: For touching up galvanized surfaces after erection, provide repair coating that is V.O.C. compliant, equal to "Silver Galv" made by Z.R.C. Worldwide, Kylon, Polywater or approved equal. Apply to a dry film thickness of 1.5 to 3.0 mils.

2.2 PRIME PAINTING

- A. Scope: All ferrous metal (except galvanized steel) shall be cleaned and shop painted with one coat of specified ferrous metal primer. No shop prime paint required on galvanized steel or aluminum work.
- B. Cleaning: Conform to Steel Structures Painting Council Surface Preparation Specification SP 3 (latest edition) "Power Tool Cleaning" for cleaning of ferrous metals which are to receive shop prime coat.
1. Steel to get high performance coating as noted in Section 099000 shall be cleaned as per SSPC SP.6 "Commercial Blast Cleaning."

C. Application

1. Apply shop prime coat immediately after cleaning metal. Apply paint in dry weather or under cover. Metal surfaces shall be free from frost or moisture when painted. Paint all metal surfaces including edges, joints, holes, corners, etc.
 2. Paint surfaces which will be concealed after shop assembly prior to such assembly. Apply paint in accordance with approved paint manufacturer's printed instructions, and the use of any thinners, adulterants or admixtures shall be only as stated in said instructions.
 3. Paint shall uniformly and completely cover the metal surfaces, 2.0 mils minimum dry film thickness. No work shall be shipped until the shop prime coat thereon has dried.
- D. Touch-Up: In the shop, after assembly and in the field, after installation of work of this Section, touch-up damaged or abraded portions of shop prime paint with specified ferrous metal primer.
- E. Apply one shop coat to fabricated metal items, except apply two (2) coats of paint to surfaces inaccessible after assembly or erection. Change color of second coat to distinguish it from the first.

2.3 GALVANIZING

- A. Scope: All ferrous metal exposed to the weather, and all ferrous metals indicated on drawings or in specifications to be galvanized, shall be cleaned and then hot-dipped galvanized after fabrication.
- B. Avoid fabrication techniques that could cause distortion or embrittlement of steel items to be hot-dip galvanized. Fabricator shall consult with hot-dip galvanizer regarding potential warpage problems or handling problems during the galvanizing process that may require adjustment of fabrication techniques or design before finalizing shop drawings and beginning of fabrication.
- C. Cleaning: Thoroughly clean metal surfaces of all mill scale, rust, dirt, grease, oil, moisture and other contaminants prior to galvanizing.
- D. Application: Hot-dip galvanizing shall conform to the following::
1. ASTM A 143: Safeguarding Against Embrittlement of Hot-Dip Galvanized Structural Steel.
 2. ASTM A 123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
 3. ASTM A 153: Galvanized Coating on Iron and Steel Hardware - Table 1.
 4. ASTM A 384: Practice for Safeguarding Against Warpage and Distortion During Hot-Dip Galvanizing of Steel Assemblies.
 5. ASTM A 385: Practice for Providing High Quality Zinc Coatings.
 6. ASTM A 924: Galvanized Coating on Steel Sheets.
 7. Minimum weight of galvanized coating shall be two (2) oz. per square foot of surface.

- E. Fabricate joints which will be exposed to weather in a manner to exclude water or provide weep holes where water may accumulate.
- F. All galvanized materials must be inspected for compliance with these specifications and marked with a stamp indicating the name of the galvanizer, the weight of the coating, and the appropriate ASTM number.
- G. To minimize surface imperfection (eg: flux inclusions), material to be galvanized shall be dipped into a solution of Zinc Ammonium Chloride (pre-flux) immediately prior to galvanizing. The type of galvanizing process utilizing a flux blanket overlaying the molten zinc will not be permitted.
- H. After galvanizing all materials not exposed to view must be chromated by dipping material in a 0.2% chromic acid solution.
- I. Galvanized surfaces, where exposed to view, must have a smooth, level surface finish. Where this does not occur, piece shall be rejected and replaced to the acceptance of the Commissioner.

2.4 PROTECTIVE COATINGS

- A. Whenever dissimilar metals will be in contact, separate contact surfaces by coating each contact surface prior to assembly or installation with one coat of specified bituminous paint, which shall be in addition to the specified shop prime paint. Mask off those surfaces not required to receive protective coating.

2.5 WORKMANSHIP

- A. General
 - 1. Miscellaneous metal work shall be fabricated by an experienced fabricator or manufacturer and installed by an experienced tradesman.
 - 2. Materials, methods of fabrication, fitting, assembly, bracing, supporting, fastening, operating devices, and erection shall be in accordance with drawings and specifications, approved shop drawings, and best practices of the industry, using new and clean materials as specified, having structural properties sufficient to safely sustain or withstand stresses and strains to which materials and assembled work will be subjected.
 - 3. All work shall be accurately and neatly fabricated, assembled and erected.
- B. Shop Assembly: Insofar as practicable, fitting and assembly of work shall be done in shop. Shop assemble work in largest practical sizes to minimize field work. It is the responsibility of the miscellaneous metal subcontractor to assure himself that the shop-fabricated miscellaneous metal items will properly fit the field condition. In the event that shop-fabricated miscellaneous metal items do not fit the field condition, the item shall be returned to the shop for correction.
- C. Cutting: Cut metal by sawing, shearing, or blanking. Flame cutting will be permitted only if cut edges are ground back to clean, smooth edges. Make cuts accurate, clean, sharp and free of burrs, without deforming adjacent surfaces or metals.
- D. Holes: Drill or cleanly punch holes; do not burn.
- E. Connections: Make connections with tight joints, capable of developing full strength of member, flush unless indicated otherwise, formed to exclude water where exposed to

weather. Locate joints where least conspicuous. Unless indicated otherwise, weld or bolt shop connections; bolt or screw field connections. Provide expansion and contraction joints to allow for thermal movement of metal at locations and by methods approved by Commissioner.

1. Welding
 - a. Shall be in accordance with AWS D1.1 Structural Welding Code of the American Welding Society, and shall be done with electrodes and/or methods recommended by the manufacturer of the metals being welded.
 - b. Welds shall be continuous, except where spot welding is specifically permitted. Welds exposed to view shall be ground flush and dressed smooth with and to match finish of adjoining surfaces; undercut metal edges where welds are required to be flush.
 - c. All welds on or behind surfaces which will be exposed to view shall be done so as to prevent distortion of finished surface. Remove weld spatter and welding oxides from all welded surfaces.
2. Bolts and Screws: Make threaded connections tight with threads entirely concealed. Use lock nuts. Bolts and screw heads exposed to view shall be flat and countersunk. Cut off projecting ends of exposed bolts and screws flush with nuts or adjacent metal.
- F. Operating Mechanism: Operating devices (i.e. pivots, hinges, etc.) mechanism and hardware used in connection with this work shall be fabricated, assembled, installed and adjusted after installation so that they will operate smoothly, freely, noiselessly and without excessive friction.
- G. Built-In Work: Furnish anchor bolts, inserts, plates and any other anchorage devices, and all other items specified under this Section of the Specifications to be built into concrete, masonry or work of other trades, with necessary templates and instructions, and in ample time to facilitate proper placing and installation.
- H. Supplementary Parts: Provide as necessary to complete each item of work, even though such supplementary parts are not shown or specified.
- I. Coordination: Accurately cut, fit, drill and tap work of this Section to accommodate and fit work of other trades. Furnish or obtain, as applicable, templates and drawings to or from applicable trades for proper coordination of this work.
- J. Exposed Work
 1. In addition to requirements specified herein and shown on drawings, all surfaces exposed to view shall be clean and free from dirt, stains, grease, scratches, distortions, waves, dents, buckles, tool marks, burrs, and other defects which mar appearance of finished work.
 2. Metal work exposed to view shall be straight and true to line or curve, smooth arrises and angles as sharp as practicable, miters formed in true alignment, profiles accurately intersecting, and with joints carefully matched to produce continuity of line and design.
 3. Exposed fastenings, where permitted, shall be of the same material, color and finish as the metal to which applied, unless otherwise indicated, and shall be of the smallest practicable size.

- K. Preparation for Hot-Dip Galvanizing: Fabricator shall correctly prepare assemblies for galvanizing in consultation with galvanizer and in accordance with applicable Reference Standards and applicable AGA publications for the "Design of Products to be Hot-Dip galvanized After Fabrication." Preparation shall include but not be limited to the following:

1. Remove welding flux.
2. Drill appropriate vent holes and provide for drainage in inconspicuous locations of hollow sections and semi-enclosed elements. After galvanizing, plug vent holes with shaped lead and grind smooth.

2.6 SHOP FINISH POWDER COAT OF SHIPS LADDER

- A. Powder-Coat Finish: Prepare, treat, and coat nongalvanized ferrous metal to comply with resin manufacturer's written instructions and as follows:

1. Prepare uncoated ferrous-metal surfaces to comply with SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
2. Treat prepared metal with iron-phosphate pretreatment, rinse, and seal surfaces.
3. Apply thermosetting polyester or acrylic urethane powder coating with cured-film thickness not less than 1.5 mils (0.04 mm).
4. Color: Custom color selected by Commissioner.

- B. Powder-Coat Finish: Prepare, treat, and coat galvanized metal to comply with resin manufacturer's written instructions and as follows:

1. Prepare galvanized metal by thoroughly removing grease, dirt, oil, flux, and other foreign matter.
2. Treat prepared metal with zinc-phosphate pretreatment, rinse, and seal surfaces.
3. Apply thermosetting polyester or acrylic urethane powder coating with cured-film thickness not less than 1.5 mils (0.04 mm).
4. Color: Custom color selected by Commissioner.

2.7 MISCELLANEOUS METALS ITEMS

- A. Rough Hardware

1. Furnish bent or otherwise custom fabricated bolts, plates, anchors, hangers, dowels and other miscellaneous steel and iron shapes as required.
2. Fabricate items to sizes, shapes and dimensions required.

- B. Ladders

1. Provide sloping ladders (ship's ladders) where noted. Fabricate open type construction with structural steel channel or steel plate stringers, pipe handrails, and diamond plate steel treads. Provide all necessary brackets and fittings for installation.

2. Ladders shall be fabricated to support a live load of one hundred (100) lbs. per square foot and a concentrated load of three hundred (300) lbs. per rung; loads not to act simultaneously.

C. Steel Pipe Handrails

1. Steel pipe of size shown on Drawings, Schedule 40.
2. Construction: Form direction changes in rails using solid bar stock or elbows. Connections shall be shop welded and ground smooth and flush, except where field connections and expansion joints are required. Field connections may be welded, internal sleeve and plug weld, or internal sleeve and set screw.
3. Longitudinal members shall be parallel with each other and with floor surface or shape of stair to a tolerance of 1/8" in 10'-0" linear feet. Center line of members within each run of railing shall be in the plane.
4. Steel pipe handrails shall be capable of resisting a two hundred (200) lb. force applied to rail from any direction and a uniformly distributed load of fifty (50) lbs. per linear foot applied downward or horizontally, loads not to act simultaneously.

D. Open Riser Service Stairs

1. General: Construct stairs to conform to sizes and arrangements shown; joint pieces together by welding. Provide complete stair assemblies, including metal framing, hangers, railings, newels, balusters, struts, clips, brackets, bearing plates and other components necessary for the support of stairs and platforms and as required to anchor and contain the stairs on the supporting structure.
2. Stair Framing: Fabricate stringers of structural steel channels, or plates, or a combination thereof. Provide closures for exposed ends of stringers. Construct platforms of structural steel channel headers and miscellaneous framing members as shown. Bolt or weld headers to strings and newels and framing members to strings and headers; fabricate and join so that bolts, if used, do not appear on finish surfaces.
3. Attach treads to stringers by means of brackets made of steel and angles or bars. Weld brackets to strings and attach metal treads to brackets by welding, riveting or bolting.
4. Provide platforms of same metal as treads and in thicknesses required to support design loading. Attach platform to platform framing members with welds.
5. Steel Floor Plate Treads and Platforms: Provide raised pattern steel floor plate complying with FS QQ-F-461, Class I. Provide diamond pattern.
 - a. Form treads of 1/4" thick steel floor plate with integral nosing and back edge stiffener. Weld steel supporting brackets to strings and treads to brackets.
 - b. Fabricate platforms of steel floor plate. Provide nosing matching that on treads at all landings. Secure to platform framing members with welds.

E. Miscellaneous Light Steel Framing

1. Light steel framing, bracing, supports, framing, clip angles, shelf angles, plates, etc., shall be of such shapes and sizes as indicated on the drawings and details or as required to suit the condition and shall be provided with all necessary supports

and reinforcing such as hangers, braces, struts, clip angles, anchors, bolts, nuts, welds, etc., as required to properly support and rigidly fasten and anchor same in place and to steel, concrete, masonry and all other connecting and adjoining work.

2. All light steel framing steel shall be furnished and erected in accordance with the applicable requirements of the "Specifications for the Design, Fabrication and Erection of Structural Steel for Buildings" by the American Institute of Steel Construction and as specified herein.

F. Ladder Safety Post

1. Furnish and install where indicated on plans ladder safety post Model LU-1, by Bilco or approved equal by Precision Ladders, Calico Ladders or approved equal. The ladder safety post shall be pre-assembled from the manufacturer.
2. Performance characteristics:
 - a. Tubular post shall lock automatically when fully extended.
 - b. Safety post shall have controlled upward and downward movement.
 - c. Release lever shall disengage the post to allow it to be returned to its lowered position.
 - d. Post shall have adjustable mounting brackets to fit ladder rung spacing up to 14" on center and clamp brackets to accommodate ladder rungs up to 1-3/4" in diameter.
3. Post: Shall be manufactured of high strength square tubing. A pull up loop shall be provided at the upper end of the post to facilitate raising the post.
4. Material of construction: Shall be steel.
5. Balancing spring: A stainless steel spring balancing mechanism shall be provided to provide smooth, easy, controlled operation when raising and lowering the safety post. [For installation in highly corrosive atmospheres, Model LU-3 incorporates a special alloy spring mechanism].
6. Hardware: All mounting hardware shall be Type 316 stainless steel.
7. Finishes: Factory finish shall be black powder coat steel.
8. Post up shall comply with OSHA requirements.

PART 3 EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where miscellaneous metal is to be installed and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.2 ERECTION

- A. Fastening to In-Place Construction: Provide anchorage devices and fasteners where necessary for securing miscellaneous metal fabrications to in-place construction; including threaded fasteners for concrete and masonry inserts, toggle bolts, through-bolts, lag bolts, wood screws, and other connectors as required.

- B. Cutting, Fitting and Placement: Perform cutting, drilling and fitting required for installation of miscellaneous metal fabrications. Set work accurately in location, alignment and elevation, plumb, level, true and free of rack, measured from established lines and levels. Provide temporary bracing or anchors in formwork for items which are to be built into concrete, masonry, or similar construction.
- C. Fitting Connections: Fit exposed connections accurately together to form tight hairline joints. Weld connections which are not to be left as exposed joints, but cannot be shop welded because of shipping size limitations. Grind exposed joints smooth and touch up shop paint coat. Do not weld, cut or abrade the surfaces of exterior units which have been hot dip galvanized after fabrication, and are intended for bolted or screwed field connections.
- D. Field Welding: Comply with AWS Code for procedures of manual shielded metal-arc welding, appearance, and quality of welds made, and methods used in correcting welding work.
- E. Touch-Up Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with same material as used for shop painting. Apply by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- F. Field Touch-Up of Galvanized Surfaces: Touch-up shop applied galvanized coatings damaged during handling and installation. Use galvanizing repair coating specified herein for galvanized surfaces.

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 078123

INTUMESCENT FIREPROOFING

PART 1 - GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the Contract Documents.

1.2 SECTION INCLUDES

- A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the intumescent fireproofing on fireproofed steel exposed view, as indicated on the drawings and/or specified herein, including, but not limited to, the following:
 - 1. Intumescent fireproofing for shop application.
 - 2. Intumescent fireproofing for interior application.

1.3 RELATED SECTIONS

- A. Structural steel - Section 051200.
- B. Painting and finishing - Section 099000.

1.4 REFERENCES

- A. ASTM Test Standards
- B. ASTM D 2240 – Durometer Hardness (Shore D Only).
- C. ASTM D 2794 – Impact Resistance.
- D. ASTM D 4060 – Abrasion Resistance.
- E. ASTM D 4541 – Bond Strength.
- F. ASTM E 84 – Surface Burning Characteristics of Building Materials.
- G. ASTM E 119 – Fire Tests of Building Construction and Materials.
- H. The Society of Protective Coatings (SSPC):
- I. SSPC SP-6: Commercial Blast Cleaning Standard.
- J. Underwriters' Laboratories Inc. (UL):
 - 1. Fire Resistive Directory, Volume 1; Current edition. Classification identified as Mastic and Intumescent Coatings (CDWZ)
 - 2. UL 263 - Fire Test of Building Construction and Material

1.5 SUBMITTALS

- A. Product Data: Submit product data including manufacturer's technical information indicating product performance characteristics, performance and limitation criteria for each product specified herein.
- B. Submit evidence indicating that manufacturer of the intumescent fireproofing coating has reviewed and approved shop primer to be used by the structural steel fabricator; refer to Section 051200, "Structural Steel," for primer description.
- C. Submit evidence indication that manufacturer of the intumescent fireproofing coating has reviewed and approved proposed topcoat.
- D. Fire Test Evidence: Submit published third party design listings for fire resistance ratings and product thickness. Include evidence that the fire testing was sponsored by the manufacturer and that the material tested was produced at the manufacturer's facility under the supervision of third party certification personnel.
- E. Installation Instructions: Submit manufacturer's written installation instructions.
- F. Installer Qualifications: Submit applicator's current certification as a manufacturer trained and approved installer.
- G. Shop Drawings: Submit plan, section, elevation and perspective drawings as necessary to depict system configuration, design considerations and application procedures.
 - 1. Use approved structural steel shop drawings, including large scale details, as base drawings for depicting intumescent fireproofing system.
- H. Samples: Submit samples on 1 foot long sections of each steel shape to receive intumescent fireproofing system.
 - 1. Materials must be applied in accordance with the project requirements for fire rating thickness, finish texture and color.
 - 2. Include primer, intumescent fireproofing, and decorative top coat.

1.6 QUALITY ASSURANCE

- A. Material Manufacturer: Company specializing in manufacturing products listed in this section.
 - 1. Fire Protection Factory Manufacturer: Company specializing in manufacturing the work of this section with a minimum of three years' documented experience.
- B. Fire Protection Installer: Company specializing in installing the work of this section with a minimum of three years' documented experience.
- C. Product.
 - 1. All products listed in this section must be manufactured under the appropriate follow-up service with each container bearing the certified label (mark).

2. Intumescent fireproofing shall be a complete system consisting of compatible primer, intumescent fireproofing coating, adhesive, edge sealant and decorative topcoat.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials in manufacturer's original, sealed, undamaged container with identification label intact. Packaged materials must bear the appropriate labels, seals and designated certification mark for fire resistive ratings.
- B. Storage: Store materials in strict accordance with manufacturers documented instructions.
- C. Documentation: All batch number, product identification and quantities shall be recorded on appropriate QC documents. A copy of the transport document and manufacturers conformance certificate shall be attached to the material delivery QC form.
- D. Store and dispose of hazardous materials, and materials contaminated by hazardous materials, in accordance with requirements of local authorities having jurisdiction.

1.8 SEQUENCING AND SCHEDULING

- A. Sequence and coordinate installation of fireproofing system with Work in other sections which would interfere with efficient fireproofing application.

1.9 WARRANTY

- A. At project closeout, provide to City of New York an executed copy of the manufacturer's standard limited warranty against manufacturing defect, outlining its terms, conditions, and exclusions from coverage.
 1. Duration: Minimum two years.

PART 2 - PRODUCTS

2.1 INTUMESCENT FIREPROOF COATING FOR SHOP OR FIELD APPLICATION

- A. Acceptable products:
 1. "Chartek 1709" made by International Paint.
 2. "Thermo-Lag 3000 Series" made by Carboline.
 3. "Structural Steel" made by Ceasefire.
 4. Or approved equal
- B. Description: A single pack, chlorine-free, epoxy-based intumescent coating applied over shop applied prime coat (see Section 051200).
- C. Fireproofing Performance: Provide intumescent fireproofing system, tested by independent testing agency in accordance with ASTM E 119/UL 263, and acceptable to authorities having jurisdiction:

1. Listed by UL and bearing the UL label.
- D. Structural Steel Fire Resistance Rating
 1. Fire Resistance Rating: Per drawings.
- E. Accessory Materials: Manufacturer's recommended adhesive and edge sealant.
- F. Shop Primer Coating: Refer to Section 051200, "Structural Steel."
 1. Verify and coordinate application of primer for compatibility with intumescent coating.
- G. Decorative Topcoat: Approved by the intumescent fireproofing manufacturer and applied in accordance with the topcoat manufacturer's documented instructions, custom colors as selected by the Commissioner.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean substrate free of dust, dirt, grease or other foreign substances that would impair with the bond of the intumescent fireproofing protection adhesive material.
- B. Grind smooth all weld spatter and defects prior to commencement of fire protection installation and touch-up shop primer in the field using same paint as shop primer.

3.2 APPLICATION

- A. Equipment and installation procedures must conform to the manufacturer's installation instructions. The intumescent fireproofing protection material shall be applied at the required dry film thickness to achieve fire resistance rating specified herein.
- B. Install fire protection material only to primed surfaces and in accordance with manufacturer's installation instructions. Refer to Section 051200 for steel shop primer.
- C. Final texture and finish of the intumescent fireproofing must be completed prior to the application of the decorative top coat and in accordance with the Commissioner's approval and approved samples.
- D. Apply decorative top coat in accordance with the manufacturer's application instructions. Color to be matte black.

3.3 TIE IN TO EXISTING ADJACENT STEEL AREAS

- A. After installation of new steel, clean existing areas in accordance with manufacturers requirements.
- B. Apply intumescent and finish coat to existing steel so new and existing have same rating.

3.3 FIELD QUALITY CONTROL

- A. The City of New York shall retain the services of an independent testing laboratory to inspect and verify the installation of the intumescent fireproofing material in accordance with the provisions of AWCI Technical Manual 12-B, Standard Practice for the Testing and Inspection of Field Applied Thin-Film Intumescent Fire-Resistive Materials; an Annotated Guide.
- B. The fire protection material inspection must be performed prior to the application of the decorative top coat.
- C. All test results must be made available to all parties at the completion of each pre-designated area and approved prior to the application of top-coat.
- D. Intumescent fireproofing not in compliance with the specification requirements must be corrected prior to the application of the decorative top coat.

3.4 CLEAN UP AND REPAIR

- A. Upon completion of installation, all excess material, overspray and debris must be cleared and removed from the job site.
- B. Remove fire protection materials from surfaces not required to be fireproofed.
- C. All patching and repair to intumescent fireproofing, due to damage by other trades, shall be performed under this section of work. Patching must be performed by the installer of the intumescent fireproofing and applied in accordance with the manufacturer's installation instructions.

3.5 PROTECTION

- A. Protect installed products until completion of project.
- B. Touch-up, repair or replace damaged products before Substantial Completion.

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 099000

PAINTING AND FINISHING

PART 1 GENERAL

1.1 GENERAL REQUIREMENTS

- A. Work of this Section, as shown or specified, shall be in accordance with the requirements of the Contract Documents.

1.2 SECTION INCLUDES

- A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the drawings and/or specified herein, including, but not limited to, the following:
 1. Prime painting unprimed surfaces to be painted under this Section.
 2. Painting all items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
 3. Painting all new and existing ferrous metal (except stainless steel) exposed to view that comprise the gridiron and related structures.
 4. Painting all galvanized ferrous metals exposed to view.
 5. Painting of sprinkler piping.
 6. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
 7. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
 8. Painting of any surface not specifically mentioned to be painted herein or on drawings, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, shall be included as though specified.

1.3 RELATED SECTIONS

- A. Shop priming is required on some, but not all of the items scheduled to be field painted. Refer to other Sections of work for complete description.
- B. Shop Coat on Machinery and Equipment: Refer to the Sections under which various items of manufactured equipment with factory applied shop prime coats are furnished, including, but not necessarily limited to, the following Sections. All items of equipment furnished with prime coat finish shall be finish painted under this Section.
- C. Decorative topcoat on intumescent fireproofing -- Section 078123.
- D. Color Coding of Mechanical Piping and Electrical Conduits -- Divisions 26.

1. This Color Coding consists of an adhesive tape system and is in addition to painting of piping and conduits under this Section, as specified above.

1.4 MATERIALS AND EQUIPMENT NOT TO BE PAINTED

- A. Items of equipment furnished with complete factory finish, except for items specified to be given a finish coat under this Section.
- B. Non-ferrous metals, except for items specified and/or indicated to be painted.
- C. Surfaces not to be painted shall be left completely free of droppings and accidentally applied materials resulting from the work of this Section.
- D. Masonry or concrete.
- E. Stage floor.
- F. Existing fire curtain and its associated hardware and track.

1.5 QUALITY ASSURANCE

- A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces.
- B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Commissioner in writing of any anticipated problems using the coating systems as specified with substrates primed by others.
- C. All paints must conform to the Volatile Organic Compounds (VOC) standards of prevailing codes and ordinances.

1.6 SUBMITTALS

- A. Materials List
 1. Before any paint materials are delivered to the job site, submit to the Commissioner a complete list of all materials proposed to be furnished and installed under this portion of the work.
 2. This shall in no way be construed as permitting substitution of materials for those specified or accepted for this work by the Commissioner.
- B. Samples
 1. Accompanying the materials list, submit to the Commissioner copies of the full range of colors available in each of the proposed products.
 2. Upon direction of the Commissioner, prepare and deliver to the Commissioner two (2) identical sets of Samples of each of the selected colors and glosses painted onto 8-1/2" x 11" x 1/4" thick material; whenever possible, the material for Samples shall be the same material as that on which the coating will be applied in the work.

- C. Manufacturer's Recommendations: In each case where material proposed is not the material specified or specifically described as an acceptable alternate in this Section of these specifications, submit for the Commissioner's review the current recommended method of application published by the manufacturer of the proposed material.

1.7 PRODUCT HANDLING

- A. Deliver all paint materials to the job site in their original unopened containers with all labels intact and legible at time of use.
- B. Protection
 - 1. Store only the approved materials at the job site, and store only in a suitable and designated area restricted to the storage of paint materials and related equipment.
 - 2. Use all means necessary to ensure the safe storage and use of paint materials and the prompt and safe disposal of waste.
 - 3. Use all means necessary to protect paint materials before, during and after application and to protect the installed work and materials of all other trades.
- C. Replacements: In the event of damage, immediately make all repairs and replacements necessary.

1.8 EXTRA STOCK

- A. Upon completion of this portion of the Work, deliver to the City of New York an extra stock of paint equaling approximately ten (10) percent of each color and gloss used and each coating material used, with all such extra stock tightly sealed in clearly labeled containers.

1.9 JOB CONDITIONS

- A. Apply water-based paints only when the temperature of surfaces to be painted and the surrounding air temperatures are between 50 degrees F. and 90 degrees F., unless otherwise permitted by the paint manufacturer's printed instructions.
- B. Apply solvent-thinned paints only when the temperature of surfaces to be painted and the surrounding air temperatures are between 45 degrees F. and 95 degrees F. unless otherwise permitted by the paint manufacturer's printed instructions.
- C. Do not apply paint in snow, rain, fog or mist; or when the relative humidity exceeds eighty-five (85) percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
- D. Painting may be continued during inclement weather only if the areas and surfaces to be painted are enclosed and heated within the temperature limits specified by the paint manufacturer during application and drying periods.

PART 2 PRODUCTS

2.1 PAINT MANUFACTURERS

- A. Except as otherwise noted, provide the painting products listed for all required painting made by one of the manufacturers listed in the paint schedule (Section 2.4). These companies are Benjamin Moore, Akzo Nobel Paint (Glidden Professional), and Sherwin

Williams (S-W) or approved equal. Comply with number of coats and required minimum mil thicknesses as specified herein.

2.2 MATERIALS

- A. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer, and use only to recommended limits.
- B. Colors and Glosses: All colors and glosses shall be as selected by the Commissioner. Certain colors will require paint manufacturer to prepare special factory mixes to match colors selected by the Commissioner. Color schedule (with gloss) shall be furnished by the Commissioner.
- C. Coloring Pigment: Products of or furnished by the manufacturer of the paint or enamel approved for the work.
- D. Linseed Oil: Raw or boiled, as required, of approved manufacture, per ASTM D 234 and D 260, respectively.
- E. Turpentine: Pure distilled gum spirits of turpentine, per ASTM D 13.
- F. Shellac: Pure gum shellac (white or orange) cut in pure denatured alcohol using not less than four (4) lbs. of gum per gallon of alcohol.
- G. Driers, Putty, Spackling Compound, Patching Plaster, etc.: Best quality, of approved manufacture.
- H. Heat Resistant Paint: Where required, use heat resistant paint when applying paint to heating lines and equipment.

2.3 GENERAL STANDARDS

- A. The various surfaces shall be painted or finished as specified below in Article 2.4. However, the Commissioner reserves the right to change the finishes within the range of flat, semi-gloss or gloss, without additional cost to the City of New York.
- B. All paints, varnishes, enamels, lacquers, stains and similar materials must be delivered in the original containers with the seals unbroken and label intact and with the manufacturer's instructions printed thereon.
- C. All painting materials shall bear identifying labels on the containers with the manufacturer's instructions printed thereon.
- D. Paint shall not be badly settled, caked or thickened in the container, shall be readily dispersed with a paddle to a smooth consistency and shall have excellent application properties.
- E. Paint shall arrive on the job color-mixed except for tinting of under-coats and possible thinning.
- F. All thinning and tinting materials shall be as recommended by the manufacturer for the particular material thinned or tinted.
- G. It shall be the responsibility of the Contractor to see that all mixed colors match the color selection made by the Commissioner prior to application of the coating.

2.4 SCHEDULE OF FINISHES

A. High Performance Coating On Galvanized Ferrous Metals

First Coat: "27 Typoxy" or "N69 Epoxoline II" by Tnemec; "Intergard 345" by International Protective Coatings; "Carboguard 893 SG" or "Carboguard 888" by Carboline; "Devran 203 WB Epoxy Primer" by Akzo; Epoxy Mastic Coating V 160 Series by Corotech/Moore or "Recoatable Epoxy Primer 867-45" by Sherwin Williams.

Second Coat: "V73 Endura Shield" or "1074/1075" by Tnemec; "Interthane 870UHS" or "990 UHS" by International Protective Coatings; "Carbothane 133 LH" by Carboline; "Devthane 379UH Aliphatic Vizethne" by Akzo; Acrylic Aliphatic Urethane V 500 (Gloss) or V 510 (Semi-Gloss) by Corotech/Moore or "Hi-Solids Urethane B65-300/350" by Sherwin Williams.

B. High Performance Coating On Non-Galvanized Ferrous Metals

Prime Coat: "Tneme-Zinc 90/97" by Tnemec; "Interzinc 52" or "315" by International Protective Coatings; "Carbozinc 859, Class B" by Carboline; "Cathacoat 302V Reinforced Inorganic Zinc Primer" by Akzo; Organic Zinc Rich Primer V 170 by Corotech/Moore or "Zinc Clad II Plus Inorganic Zinc Rich Coating B69V212" by Sherwin Williams.

Second Coat: "27 Typoxy" or "N69 Epoxoline II" by Tnemec; "Intergard 345" by International Protective Coatings; "Carboguard 893 SG" or "Carboguard 888" by Carboline; "Bar-Rust 231V Multi Purpose Epoxy Mastic" by Akzo; Epoxy Mastic Coating V 160 Series by Corotech/Moore or "Macropoxy 646 I.C. Epoxy B58-600" by Sherwin Williams.

Third Coat: "V73 Endura Shield" or "1074/1075" by Tnemec; "Interthane 870UHS" or "990 UHS" by International Protective Coatings; "Carbothane 133 LH" by Carboline; "Devthane 379 UH Aliphatic Urethane" by Akzo; Acrylic Aliphatic Urethane V 500 (Gloss) or V 510 (Semi-Gloss) by Corotech/Moore or "Hi-Solids Polyurethane B65-300/350" by Sherwin Williams.

2.5 EXISTING SURFACES TO BE PAINTED

- A. Existing surfaces shall be painted in accordance with schedule given in Article 2.4 herein except that first or prime coat may be eliminated where existing paint is sound. Where existing paint must be removed down to base material, provide first or prime coat as specified.

2.6 ELECTRICAL EQUIPMENT EXPOSED TO VIEW

- A. Paint all exposed piping, conduits and electrical equipment. Use heat resisting paint when applied to heating lines and equipment. The Contractor is cautioned not to paint or otherwise disturb moving parts in the mechanical systems. Mask or otherwise protect all parts as required to prevent damage.
- B. Panel Boards, Grilles and Exposed Surfaces of Electrical Equipment: Latex Enamel Undercoater and two (2) coats Latex Semi-Gloss.
- C. Equipment or Apparatus with Factory-Applied Paint: Refinish any damaged surfaces to match original finish. Do not paint over name plates and labels.

- D. All surfaces of insulation and all other work to be painted shall be wiped or washed clean before any painting is started.
- E. All conduit, boxes, distribution boxes, light and power panels, hangers, clamps, etc., are included where painting is required.
- F. All items of Electrical trades which are furnished painted under their respective Contracts shall be carefully coordinated with the work of this Section so as to leave no doubt as to what items are scheduled to be painted under this Section.

PART 3 EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.2 GENERAL WORKMANSHIP REQUIREMENTS

- A. Only skilled mechanics shall be employed. Application may be by brush or roller. Spray application only upon acceptance from the Commissioner in writing.
- B. The Contractor shall furnish the Commissioner a schedule showing when he expects to have completed the respective coats of paint for the various areas and surfaces. This schedule shall be kept current as the job progresses.
- C. The Contractor shall protect his work at all times, and shall protect all adjacent work and materials by suitable covering or other method during progress of his work. Upon completion of the work, he shall remove all paint and varnish spots from floors, glass and other surfaces. He shall remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and shall leave his part of the work in clean, orderly and acceptable condition.
- D. Remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.
- E. All materials shall be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- F. Coverage and hide shall be complete. When color, stain, dirt or undercoats show through final coat of paint, the surface shall be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the City of New York.
- G. All coats shall be dry to manufacturer's recommendations before applying succeeding coats.

3.3 PREPARATION OF SURFACES

- A. Existing Surfaces: Clean existing surfaces requiring paint or finishing, remove all loose and flaking paint or finish and sand surface smooth as required to receive new paint or finish. No "telegraphing" of lines, ridges, flakes, etc., through new surfacing is

permitted. Where this occurs, Contractor shall be required to sand smooth and re-finish until surface meets with Commissioner's approval.

B. General

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished shall be perfectly dry, clean and smooth.
2. Perform all preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
3. Clean surfaces to be painted before applying paint or surface treatments. Remove oil and grease with clean cloths and cleaning solvents prior to mechanical cleaning. Program the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.

C. Metal Surfaces

1. Weld Fluxes: Remove weld fluxes, splatters, and alkali contaminants from metal surfaces in an approved manner and leave surface ready to receive painting.
2. Bare Metal: Thoroughly clean off all foreign matter such as grease, rust, scale and dirt before priming coat is applied. Clean surfaces, where solder flux has been used, with benzene. Clean surfaces by flushing with mineral spirits. For aluminum surfaces, wipe down with an oil free solvent prior to application of any pre-treatment.
 - a. Bare metal to receive high performance coating specified herein must be blast cleaned SSPC SP-6 prior to application if field applied primer; coordinate with steel trades furnishing ferrous metals to receive this coating to insure that this cleaning method is followed.
3. Shop Primed Metal: Clean off foreign matter as specified for "Bare Metal." Prime bare, rusted, abraded and marred surfaces with approved primer after proper cleaning of surfaces. Sandpaper all rough surfaces smooth.
4. Galvanized Metal: Prepare surface as per the requirements of ASTM D 6386.
5. Metal Filler: Fill dents, cracks, hollow places, open joints and other irregularities in metal work to be painted with an approved metal filler suitable for the purpose and meeting the requirements of the related Section of work; after setting, sand to a smooth, hard finish, flush with adjoining surface.

- D. Touch-Up: Prime paint all patched portions in addition to all other specified coats.

3.4 MATERIALS PREPARATION

- A. Mix and prepare painting materials in strict accordance with the manufacturer's directions.

- B. Store materials not in actual use in tightly covered containers. Maintain containers used in storage, mixing, and application of paint in a clean condition, free of foreign materials and residue.
- C. Stir all materials before application to produce a mixture of uniform density, and as required during the application of the materials. Do not stir any film which may form on the surface into the material. Remove the film and, if necessary, strain the material before using.
- D. Tint each undercoat a lighter shade to facilitate identification of each coat where multiple coats of the same material are to be applied. Tint undercoats to match the color of the finish coat, but provide sufficient difference in shade of undercoats to distinguish each separate coat.

3.5 APPLICATION

A. General

- 1. Apply paint by brush or roller in accordance with the manufacturer's directions. Use brushes best suited for the type of material being applied. Use rollers of carpet, velvet back, or high pile sheep's wool as recommended by the paint manufacturer for material and texture required.
- 2. The number of coats and paint film thickness required is the same regardless of the application method. Do not apply succeeding coats until the previous coat has completely dried. Sand between each enamel or varnish coat application with fine sandpaper, or rub surfaces with pumice stone where required to produce an even, smooth surface in accordance with the coating manufacturer's directions.
- 3. Apply additional coats when undercoats, stains, or other conditions show through the final coat of paint, until the paint film is of uniform finish, color and appearance. Give special attention to insure that all surfaces, including edges, corners, crevices, welds, and exposed fasteners receive a film thickness equivalent to that of flat surfaces.

B. Scheduling Painting

- 1. Apply the first coat material to surfaces that have been cleaned, pre-treated or otherwise prepared for painting as soon as practicable after preparation and before subsequent surface deterioration.
 - 2. Allow sufficient time between successive coatings to permit proper drying. Do not re-coat until paint has dried to where it feels firm, does not deform or feel sticky under moderate thumb pressure, and the application of another coat of paint does not cause lifting or loss of adhesion of the undercoat.
- C. Prime Coats: Re-coat primed and sealed walls and ceilings where there is evidence of suction spots or unsealed areas in first coat, to assure a finish coat with no burn-through or other defects due to insufficient sealing.
 - D. Pigmented (Opaque) Finishes: Completely cover to provide an opaque, smooth surface of uniform finish, color, appearance and coverage.
 - E. "Touching-Up" of Factory Finishes: Unless otherwise specified or shown, materials with a factory finish shall not be painted at the project site. To "touch-up," the

Contractor shall use the factory finished material manufacturer's recommended paint materials to repair abraded, chipped, or otherwise defective surfaces.

3.6 PROTECTION

- A. Protect work of other trades, whether to be painted or not, against damage by the painting and finishing work. Leave all such work undamaged. Correct any damages by cleaning, repairing or replacing, and repainting, as acceptable to the Commissioner.
- B. Provide "Wet Paint" signs as required to protect newly painted finishes. Remove temporary protective wrappings provided by others for protection of their work after completion of painting operations.

3.7 CLEAN UP

- A. During the progress of the work, remove from the site all discarded paint materials, rubbish, cans and rags at the end of each work day.
- B. Upon completion of painting work, clean window glass and other paint spattered surfaces. Remove spattered paint by proper methods of washing and scraping, using care not to scratch or otherwise damage finished surfaces.
- C. At the completion of work of other trades, touch-up and restore all damaged or defaced painted surfaces.

3.8 WASTE MANAGEMENT

- A. Close and seal tightly all partly used paint and finish containers and store protected in a well-ventilated, fire-safe area at moderate temperature.
- B. Designated un-used paint for:
 - 1. Immediate re-use
 - 2. Long term maintenance needs
 - 3. Recycling by an appropriate facility.
 - 4. Donation
- C. Place empty containers of solvent-based paints in areas designated for hazardous materials.
- D. Do not dispose of paints or solvents by pouring on the ground. Place amounts too small to re-use in designated containers for proper disposal
- E. Place materials defined as hazardous or toxic waste in designated containers.

END OF SECTION

THIS PAGE LEFT INTENTIONALLY BLANK

SECTION 116133

STAGE RIGGING

PART 1 - GENERAL

1.1 SUMMARY

- A. The work of this Section includes all labor, materials, equipment and services necessary to complete the Stage Rigging installation, as shown on the drawings and specified herein, including, but not limited to, the following:
1. Removal and disposal of existing rigging equipment.
 2. Arbor guides, spaced 6 inches on center, for the full potential inventory of counterweight sets.
 3. Lock rail and associated index light.
 4. Single purchase, undedicated, manual counterweight sets. Quantity: as shown on the drawings.
 5. 40,000 pounds of steel counterweights.
 6. Owner demonstration.

1.2 RELATED WORK

- A. Related work which is not part of the work in this Section includes, but is not limited to, the following:
1. Removal and storage of all soft goods by the House Crew prior to removal and disposal of the existing rigging system by the Rigging Contractor.
 2. Removal and storage of the lighting cables, trusses and chain hoists by the House Crew, prior to removal and disposal of the existing rigging system by the Rigging Contractor.
 3. Existing fire curtain.
 4. Modified existing gridiron, including new trusses and associated queen posts.
 5. Modified existing head block beam.
 6. New loading gallery.
 7. New ship's ladder gridiron access.
 8. New gridiron work lighting.
 9. Fire protection system.

1.3 ACCEPTABLE CONTRACTORS

- A. The following are acceptable Contractors:
1. Pook Diemont and Ohl, Inc.
701 East 132nd Street
Bronx, New York 10454
(718) 402-2677
pdoinc.com

2. SECOA
8650 109th Avenue North
Champlin, Minnesota 55316
(763) 506-8800
secoa.com
3. I Weiss
815 Fairview Avenue Unit 10
Fairview NJ 07022
(201) 402-6500
iweiss.com

1.4 QUALITY ASSURANCE

- A. All equipment shall be manufactured and installed in accordance with the applicable standards of the following organizations:
 1. American Iron and Steel Institute (AISI).
 2. American National Standards Institute (ANSI).
 3. American Society of Mechanical Engineers (ASME).
 4. American Society for Testing and Materials (ASTM).
 5. American Welding Society (AWS).
 6. Entertainment Services and Technology Association (ESTA).
 7. Industrial Fasteners Institute (IFI).
 8. International Organization for Standardization (ISO).
- B. Minimum safety factor for rigging and related components: 8.
- C. Maximum fleet angle: 1-1/2 degrees.
- D. Fasteners typically shall have a minimum SAE J429 Grade 5 or ISO R898 Class 8.8 rating. Bolts in tension shall have nuts of equivalent rating. Fasteners shall be self-locking or secured by alternate means to prevent loosening.
- E. Shackles and turnbuckle jaws shall have screw pins, moused with plastic tie-wrap after installation.
- F. In the context of this specification, "provide" means furnish and install.
- G. This specification sets forth minimum safety standards, operational criteria, and minimum standards for quality in workmanship. It is the sole responsibility of the Contractor to design, engineer, furnish and install a safe, fully functional system in compliance with the design intent of the Contract Documents.
- H. The bidder must, within the last five (5) consecutive years prior to the bid opening, have successfully completed in a timely fashion at least three (3) projects similar in scope and type to the required work.

1.5 SUBMITTALS

- A. Submittal procedures shall be as dictated by the governing agency.
- B. Fabrication shall not commence until the Commissioner determines that the shop drawings are in compliance with the design intent of the Contract Documents. Shop drawings shall be revised and resubmitted as required.
- C. Shop drawings shall include the following:
 - 1. Scale plans and elevations, derived from the Contract Drawings.
 - 2. Revised plans and elevations based on field survey of new structural work.
 - 3. Assembly drawings of all major components. Drawings shall include dimensions, weights, and bills of materials. Drawings shall show the construction and capacity of each component, and the loads imposed on the building structure.
 - 4. Finishes.
 - 5. Estimated live and dead loads.
- D. The Contractor shall be prepared to provide any engineering calculations requested by the Commissioner.
- E. Catalog information for standard equipment, such as termination hardware, may be submitted instead of shop drawings, if applicable. Catalog information shall include the country of origin.
- F. Upon completion of the installation, provide 1 reduced set of the shop drawings in a 3-ring binder for the City of New York. In addition, provide electronic copies of the shop drawings for the City of New York, the Commissioner and the Theatre Staff. Electronic copies shall be in PDF format.
- G. Provide 1 hard copy of an instruction and maintenance manual for the City of New York. In addition, provide electronic copies of the manual for the City of New York, the Commissioner and the Theatre Staff. Electronic copies shall be in PDF format. The manual shall include:
 - 1. System description.
 - 2. Operation instructions, including safety measures.
 - 3. Maintenance instructions, including recommended procedures and schedules for inspecting system components.
 - 4. Catalog cuts for all purchased equipment
- H. Instruction and maintenance manuals shall be provided at the time of Owner demonstration.

1.6 WARRANTY

- A. Warrant the equipment in this Section to be free of defects in materials and workmanship for a period of 3 years after acceptance of the completed installation by the City of New York. Defective work shall be repaired and replaced at no cost to the City of New York. The Warranty shall not cover the results of normal use, nor shall it cover damage due to neglect or improper use of the equipment.
- B. Provide all required maintenance or replacement within 30 days of notification by the City of New York, with the following exception: All required maintenance or replacement which affects the safe operation of the installation shall be accomplished within 48 hours.

- C. The Warranty shall include a service visit by the Contractor at the end of the first year under warranty. The Contractor shall consult with the City of New York's staff, inspect the system, and perform any necessary maintenance and repair.

PART 2 - EQUIPMENT

2.1 FINISHES

- A. Metal parts shall be free from rust, scale, dirt, and welding spatter. All weldments or other metal components shall receive a coat of corrosion resistant primer prior to finish coating and component assembly.
- B. Finish coat shall be flat alkyd enamel. Color shall be black.

2.2 RIGGING BLOCKS: GENERAL

- A. Sheaves shall be high strength nylon resin, or reinforced polymer composite.
- B. Sheaves shall be machine turned and bored.
- C. Sheave grooves shall have tapered walls which support the wire rope and hand line rope between 135 and 150 degrees of their circumference.
- D. Sheaves shall have precision ball bearings, except as specified otherwise below. Bearings shall be rated for the maximum static and dynamic loads at 300 feet per minute maximum RPM, plus manufacturer's recommended safety factor. Minimum lifespan rating: 2000 hours.
- E. Shafts shall be made of machined steel.
- F. Sheave hubs shall be sized to provide adequate load support for the bearing assembly. Hub bores shall conform to the tolerances of the bearing manufacturer.
- G. Sheaves shall rotate plumb and true without touching the side plates.
- H. Rigging blocks shall typically clamp in place. Welding is not acceptable, except as approved by the Commissioner and the Project Structural Engineer.

2.3 HEAD BLOCKS

- A. Head blocks are upright style, mounted to the top of the head block beam. Head blocks are mounted at an angle to the beam, as shown on the drawings.
- B. Head blocks shall be designed and fabricated to support a 3000 pound minimum manufacturer's recommended working load.
- C. Head block sheaves shall be 12 inches in diameter with a groove for each wire rope lifting line and a groove for the rope hand line. Grooving shall be such that the centers of the wire rope and hand line have equal radii from the sheave axis.
- D. Sheaves shall have 1 inch minimum diameter shafts on tapered roller bearings.
- E. Side plate thickness shall be 10 gauge minimum.

2.4 LOFT BLOCKS

- A. Loft blocks are upright style, mounted to the gridiron.

- B. Loft blocks shall be designed and fabricated to support a 750 pound minimum manufacturer's recommended working load.
- C. Loft block sheaves shall be 8 inches in diameter, with sheaves grooved for a single line, except as noted below.

2.5 TAKE-UP BLOCKS

- A. Take-up block sheaves shall be 10 inches diameter and grooved for a 3/4 inch diameter hand line.
- B. The take-up block shall attach to the arbor guides with steel shoes.
- C. Provide each block housing with a kick plate angle.
- D. The block shall weigh a minimum of 40 pounds.
- E. Take-up blocks are mounted at an angle to the arbor guides, as shown on the drawings.

2.6 ARBOR GUIDES

- A. Arbor guides shall be steel or aluminum tee, aluminum J-bar, aluminum A-bars.
- B. Guides shall be straight and have squared ends for smooth splice connections which do not interfere with arbor travel.
- C. Support the arbor guides on 5 foot vertical and horizontal centers. Guides shall be plumb.
- D. Wall battens shall be steel angle, supported by adjustable knees.
- E. Provide a continuous angle for securing the bottom of the arbor guides at the floor.
- F. Provide a continuous bumper at the top of the arbor guides, consisting of a 2 x 2 inch support angle and a 2 x 2 inch hardwood batten.
- G. Arbor guides shall be black, painted, powder-coated, or anodized as required by the material.

2.7 ARBORS

- A. Arbors shall be a front-loading type. Side loading arbors, with steel rods, are not acceptable.
- B. The arbor shall enclose the counterweights on three sides. Arbors that do not enclose the counterweights are not acceptable.
- C. The arbor shall have a removable containment device to restrain counterweight movement on the loading side of the arbor.
- D. The arbor shall have shelves welded in place no more than 24 inches apart to allow for loading and unloading at any shelf. Arbors requiring spreader plates are not acceptable. Arbors without shelves are not acceptable. Arbors loaded strictly from the base of the arbor are not acceptable.
- E. The arbor shall be designed in a manner to promote seating of the counterweight away from the removable containment device.

- F. The arbor shall be designed to hold weights for balancing loads in a manner that permits safe handling and easy access while retaining the counterweights within the arbor, even in the case of unexpected impact. Arbor frames and fittings shall be of materials having ductile properties that deform plastically without fracturing.
- G. All arbor tops shall be equipped with attachment points for the lift lines and hand lines, and the attachment points shall be sized so that terminations do not rest on, pinch, or otherwise bind adjacent terminations.
- H. Arbors shall be designed to hold counterweights fabricated as described below, and shall be designed to hold such counterweights without dislodging in the event of unexpected impact loads.
- I. The inside of the counterweight arbor bottom frame shall be configured so that the counterweights rest without rocking. Counterweights shall not be permitted to rest on any bolt, nut, fastener, or other mounting hardware.
- J. The arbor frame shall contain guide assemblies for engaging guide rail systems. Guide assemblies shall run freely, and engage the rail assembly in a manner that prevents arbors from disengaging under normal usage. The guide assemblies shall be designed to minimize noise and friction.
- K. Arbors are mounted at an angle to the arbor guides, as shown on the drawings.

2.8 COUNTERWEIGHTS

- A. Counterweights shall be made of steel, with ductile properties that will deform plastically without fracturing.
- B. Counterweights shall be free from sharp edges.
- C. Counterweights shall have an oblong shaped hole to be used as a handle cut toward one end.
- D. Counterweights shall be 1 inch thick.
- E. Paint the counterweights required to balance the unloaded batten red.

2.9 LIFTING LINES

- A. Lifting lines shall be 1/4 inch diameter 7 x 19 galvanized wire rope, with a minimum breaking strength of 7,000 pounds.
- B. Discard any damaged or permanently deformed wire rope.
- C. Lifting line terminations at the arbor shall consist of a thimble and a copper Nicopress fitting. Attach the lines with a 5/16 inch screw pin anchor shackle.
- D. Lifting line terminations at the batten shall consist of a thimble, a copper Nicopress fitting, a jaw/jaw turnbuckle, and a pipe clamp. Mouse turnbuckles with plastic tie wrap. Wire mousing is not acceptable.
- E. Secure the loose ends of the wire rope to the standing portion of the lines with plastic tie wrap.

2.10 HAND LINES

- A. Hand lines shall be 3/4 inch diameter, 3-strand composite polyester rope. Color: black.
- B. Attach the hand line to the arbor with 2 half hitches. Secure the rope ends to the standing portion of the line with plastic tie wrap.

2.11 ROPE LOCKS

- A. Rope locks shall have a hand levers with a thumb release buttons. Lock handles requiring keeper rings are not acceptable.
- B. Locks shall hold the rope between machined rollers, holding the rope in 3 bends, without crimping. Rope locks that squeeze the rope to hold it in place are not acceptable.
- C. Rope locks shall have an integral mechanism designed to prevent accidental release.
- D. Rope locks shall allow for lock out in both the open and closed position.
- E. Housings shall be made of a material having ductile properties that will deform plastically without fracturing.
- F. Attachment of the lock to the rail shall be such that loads imposed on the lock are safely transferred to the rail structure.
- G. Rope locks shall be positioned to impose minimal wear on the operating line as it passes through the system.

2.12 LOCK RAIL

- A. Design the lock rail to withstand a uniform uplift of 500 pounds per linear foot and one 1000 pound concentration.
- B. The lock rail shall include an angle frame which supports a continuous bottom bumper, separate from the arbor guides. Glue a continuous 1/2 inch thick rubber strip to the bumper.
- C. The lock rail shall have a continuous 3 inch square tube located 1 inch above the finished floor to serve as a kick-plate, and a means of attaching a 1000 pound capacity movable capstan winch.
- D. Provide formed index card holders for each set. Provide a plastic "write-on/wipe-off" card for each holder.
- E. Fabricate the lock rail supports so that the top of the rail is 27 inches above the finished floor.
- F. The lock rail shall be attached to the concrete subfloor. The finished stage floor shall stop at the lock rail stanchion, under the capstan tube. Adjust the height of the lock rail support structure as required.
- G. Provide 8 foot tall, steel-framed, wire mesh protective screens at both ends of the lock rail, as shown on the drawings.

2.13 PIPE BATTENS

- A. Battens shall be 1-1/2 inch nominal diameter standard weight (Schedule 40) black iron pipe.
- B. Batten splices shall be made with an 18 inch long, 1-9/16 inch diameter DOM tube with a minimum wall thickness of 3/16 inch. Weld one end of the splice tube. Fasten the other end with two 3/8 inch bolts.
- C. Paint the 12 inches at each end of the batten safety yellow. In addition, provide yellow plastic end caps on the batten ends.
- D. Mark the centerline of the batten with a 1/2 inch wide, painted safety yellow line.

2.14 INDEX LIGHT

- A. The index light shall be as long as the lock rail, with 40W "A" lamps on 2 foot centers. Manufacturer product code, for reference: JR Clancy 015-151410. Additional manufacturers: H&H Specialties, SECOA.
- B. Paint the inside of the light housing white, and outside of the housing flat black.
- C. Attach the index light to brackets which are attached to the wall, corresponding to the empty spaces between sets, as shown on the drawings.
- D. Connect the index light to the circuit for the existing light.

2.15 SET NUMBER LABELS

- A. Provide counterweight set number labels as follows:
 - 1. Lock rails: Consecutive set numbers at each index card holder plate.
 - 2. Arbors: Consecutive set numbers on the upstage and downstage sides of the arbor.
 - 3. Head blocks: Consecutive set numbers on the upstage and downstage side plates.
 - 4. Loft blocks: Consecutive set numbers on the upstage and downstage side plates.
 - 5. Battens: Painted consecutive set numbers at both ends of the batten, onstage of the plastic end caps.
- B. Arbor and batten labels shall be 1 inch high, white painted stencil numbers. All other labels shall be 1 inch high, white, vinyl die-cut numerals.
- C. Labeling shall be installed prior to punchlisting of the equipment.

2.16 SIGNAGE

- A. Provide a wall-mounted loading gallery sign which says the following in 3/4 inch high, characters: MAX LIVE LOAD ON LOADING GALLERY: 750 LBS/SQ FT.
- B. Provide a "Rigging Information" sign, as illustrated below. Wall mount the sign upstage, near the lock rail.

RIGGING INFORMATION

Theatre: *[name of theatre]*

Architect: *[project architect]*

Structural Engineer: *[project engineer]*

Theatre Consultant: Fisher Dachs Associates New York NY

Rigging Manufacturer: *[name, address, telephone number]*

Installation date: *[month and year]*

Rigging support steel: *[per Project Structural Engineer]*

Gridiron floor load: *[per Project Structural Engineer]*

Loading gallery floor load: *[per Project Structural Engineer]*

Lock Rail: *[per Manufacturer].*

Rope lock recommended imbalance: *[per Manufacturer].*

Counterweights: 1 inch thick pieces weigh *per Manufacturer].*

Head block working load limit: *[per Manufacturer].*

Loft block working load limit: *[per Manufacturer].*

Wire rope lifting lines: 1/4 inch diameter, 7 x 19 aircraft cable with an 875 pound working load limit (7,000 pound breaking strength with an 8/1 safety factor).

The rigging system should be inspected annually.

SAFETY FIRST. Always follow the Manufacturer's recommended operation and maintenance procedures.

Illustration of "Rigging Information" sign.

PART 3 - EXECUTION**3.1 COORDINATION**

- A. The Contractor is responsible for reviewing all drawings, specifications, and field conditions which affect the work in this Section. Notify the Commissioner whenever field measurements, analysis of the drawings and specifications, or progress of other trades indicates that the work in this Section cannot be completed as specified or as scheduled.

3.2 JOB CONDITIONS

- A. The Contractor shall visit the site and verify all dimensions and existing conditions. The Contractor shall also be familiar with the work of adjoining trades and coordinate with their work.
- B. The Contractor is ultimately responsible for the equipment fitting the intended spaces without interference.

3.3 INSTALLATION

- A. Only trained personnel shall install the equipment in this Section.
- B. Provide scaffolding and platforms as required for installation.
- C. Wire ropes shall be aligned and muled so as not to touch anything except their sheave grooves and terminations.
- D. Turnbuckles shall be moused with plastic tie wrap after adjustment. Wire mousing is not acceptable.
- E. Shackle screw pins shall be moused with plastic tie wrap. Wire mousing is not acceptable.
- F. Attach Nicopress sleeves according to the manufacturer's instructions. Check the crimps with the manufacturer's go/no-go gauge. Check the adjustment of the Nicopress tool after every 50 crimps. Maximize the number of in-shop Nicopress attachments.
- G. Battens shall be level and shall all trim to the same high and low positions within 1 inch.
- H. Batten ends shall align within 1 inch.
- I. Adjust set locations in the field as required for final adjustment, such as maintaining clearances, and minimizing spacing where desirable.
- J. Secure all loose equipment, tools and debris from falling from the gridiron and gallery during all phases of the installation.
- K. At the end of each day during the installation period, remove all refuse and scrap materials to collection points specified by the City of New York. Upon completion of the installation, leave all areas broom clean.

3.4 PROTECTION OF EQUIPMENT

- A. Protect the equipment in this Section from damage and deterioration, including rust, during all phases of the work, from the time of manufacture to installation.
- B. Notify the General Contractor in writing of jobsite conditions that would adversely affect the equipment after installation. Do not install the equipment if jobsite conditions beyond the control of the Rigging Contractor will result in damage or deterioration.

3.5 CLEANING AND REPAIR

- A. When construction is complete, restore all system components to their delivered condition. This includes dusting, cleaning, and removal of construction materials.

- B. Repair any work or finishes that are damaged during installation by the Contractor for the work in this Section. This includes the work in this Section and the work of others. Where the work of others is damaged, reimburse the appropriate contractor for the repair.

3.6 OPERATION OF EQUIPMENT

- A. Prior to completion of the installation and turnover to the City of New York, the equipment in this section shall be operated by employees of the Contractor, those authorized by the Contractor, or those under the Contractor's supervision.

3.7 COMMISSIONING AND PUNCHLISTING

- A. Prior to punchlisting, the Rigging Contractor shall commission the system and certify that the installation is complete and ready for punchlisting by the Commissioner.
- B. Set labeling shall be installed prior to punchlisting.

3.8 DEMONSTRATION

- A. Assist the City of New York and the Theatre Staff in becoming familiar with the completed installation and personally instruct representatives of the City of New York in the proper operation and maintenance of all equipment provided.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 210000

COMMON WORK RESULTS FOR FIRE PROTECTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 FIRE PROTECTION WORK

- A. Work under this Section as shown or specified shall be in accordance with the requirements of the Contract Documents.

1.3 WORK INCLUDED

- A. The work covered by this section includes the construction described in the Contract Documents including all labor necessary to perform and complete such construction, all materials and equipment incorporated or to be incorporated in such construction, and all services, facilities, tools and equipment necessary or used to perform and complete such construction. The work includes, but is not limited to the following:

1. Sprinkler Systems and Equipment.
2. Fire Standpipe System and Equipment.
3. Piping, Valves and Fittings.
4. Identification System.
5. Hydraulic Calculations.
6. Cutting, Patching and Equipment Painting.
7. Hangers, Supports and Guides.
8. Rigging of Equipment.
9. Furnishing access Doors and Frames to be installed under another section.

- B. Related Work not Included in this Division but Specified Elsewhere

1. Finish painting, except for pre-finished equipment or as otherwise specified.
2. Installation of access doors and frames.

1.4 COORDINATION OF WORK

- A. The fire protection drawings show the general arrangement of piping and appurtenances. Follow these drawings as closely as the actual construction will permit. Conform the fire protection work to the requirements shown on the drawings. Provide offsets, fittings, and accessories, which may be required but not shown on the drawings. Investigate the site, structural and finish ground

- conditions affecting the work, and arrange the work accordingly. Provide such work and accessories as may be required to meet such conditions.
- B. Certain materials will be provided by other trades. Examine the Contract Documents to ascertain these requirements.
 - C. Carefully check space requirements with other trades to insure that all material can be installed in the spaces allotted thereto including finished suspended ceilings.
 - D. Transmit to other trades all information required for work to be provided under their sections, in ample time for installation.
 - E. Wherever work interconnects with work of other trades, coordinate with the General Contractor to insure that necessary information is presented so all the necessary connections and equipment may be properly installed. Identify all items (valves, piping, equipment, etc.) In order that the General Contractor will know where to install access doors and panels.
 - F. Consult with other trades regarding equipment so that, wherever possible, motors, motor controls, pumps and valves are of the same manufacturer.
 - G. Provide required supports and hangers for piping and equipment, designed so as not to exceed allowable loadings of structures.
 - H. Examine and compare the contract drawings and specifications with the drawings and specifications of other disciplines and report any discrepancies between them to the General Contractor and obtain from him written instructions for changes necessary in the work of this section. Install and coordinate the work of this section in cooperation with the General Contractor installing interrelated work. Before installation, take proper provisions to avoid interferences. All changes required in the work of the contractor, caused by his neglect to do so, are to be made by him at his own expense.
 - I. Wherever the work is of sufficient complexity, prepare additional detail drawings to scale similar to that of the design drawings, prepared on tracing medium of the same size as contract drawings. With these layouts, coordinate the work with the work of the General Contractor. Such detailed work is to be clearly identified on the drawings as to the area to which it applies. Submit these drawings to the Commissioner for review. At completion, however, include a set of such drawings with each set of as-built drawings. When directed by the Commissioner, submit drawings for review, clearly showing the work of this section and its relation to the work of other disciplines before commencing shop fabrication or erection in the field.
 - J. Before commencing work, examine all adjoining work on which this work is in any way dependent for perfect workmanship and report any conditions, which prevent performance of first class work. Become thoroughly familiar with actual existing conditions to which connections must be made or which must be changed or altered.

- K. Provide required anchor bolts, sleeves, inserts and supports. Direct location of anchor bolts, sleeves, inserts and supports to insure that they are properly installed. Any expense resulting from the improper location or installation of anchor bolts, sleeves, inserts and supports to be paid for by the contractor.
- L. Slots, chases, openings and recesses through floors, walls, ceilings, and roofs will be provided by the various trades in their respective materials. Properly locate such openings and be responsible for any cutting and patching caused by the neglect to do so.
- M. Adjust location of pipes, panels, equipment, etc., to accommodate the work to prevent interferences, both anticipated and encountered. Determine the exact route and location of each pipe prior to fabrication.
 - 1. Right-of-Way: Lines that pitch have the right-of-way over those that do not pitch, i.e., plumbing drains. Lines whose elevations cannot be changed have right-of-way over lines whose elevations can be changed.
 - 2. Make offsets, transitions and changes in direction in pipes as required to maintain proper head room and pitch on sloping lines whether or not indicated on the drawings. Furnish and install all air vents, drains, etc., as required to affect these offsets, transitions and changes in direction.
- N. Install all fire protection work to permit removal (without damage to other parts) of all other parts requiring periodic replacement or maintenance. Arrange pipes and equipment to permit access to valves, cocks, starters, motors, and control components, and to clear the openings of swinging doors and access panels.
- O. Provide access panels in equipment as required for inspection and maintenance of internal parts, etc.
- P. This contractor shall coordinate his work with the work of other trades.
- Q. Coordinated Composite Drawings
 - 1. The Contractor shall prepare full coordinated composite drawings for the mechanical, electrical and fire protection trades. The Contractor shall overlay each trade's work (in separate colors) on a sepia set of sheetmetal drawings. All conflicts and potential conflicts shall be clearly identified on the sepia sheetmetal drawings. This shall include but not be limited to conflicts with lights, equipment, piping, ductwork and supports of other trades, as well as conflicts with architectural and structural walls, columns, ceilings and structural beams. Contractor shall have representatives of each trades, as well as conflicts with architectural and structural walls, columns, ceilings and structural beams. Contractor shall have representatives of each trade attend a weekly job site coordination meeting in the Contractor's field office. All trades shall resolve conflicts at these meetings and sign off each sepia sheetmetal drawing indicating acceptance and satisfactory resolution to all conflicts. All conflicts that cannot be resolved shall be brought to the attention of the Commissioner for resolution.

1.5 USE OF SITE AND LOAD LIMITATIONS

- A. The contractor shall review all available data on the location and types of pipelines and other underground utilities. The contractor shall not operate equipment over the facilities and shall take care not to damage them or otherwise impair their use. The contractor shall make investigation to verify the location of these facilities before proceeding with construction and/or operations in their vicinity.

1.6 CONTRACTOR'S RESPONSIBILITY FOR EVALUATION

- A. The Commissioner makes no representations, regarding the character or extent of the subsoils, water levels, existing structural, mechanical and electrical installations, above or below ground or other subsurface conditions which may be encountered during the Work. The contractor must make his own evaluation of existing conditions, which may affect methods or cost of performing the Work, based on his own examination of the facility or other information. Failure to examine the drawings or other information shall not relieve the contractor of his responsibility for satisfactory accomplishment of the Work.
- B. The locations of existing services are believed to be as indicated on the drawings. The contractor shall verify the actual location of these services and notify the Commissioner of any discrepancies prior to commencing work.

1.7 ACCESS TO FIRE PROTECTION EQUIPMENT

- A. The contractor shall not interfere with access to hydrants, fire exits, fire hose stations, fire extinguishers, and fire alarm pull stations. In no case shall the contractor's material or equipment be within twenty-five (25) feet of a hydrant or fire alarm pull station.

1.8 EQUIPMENT AND MATERIALS

- A. If products and materials are specified or indicated on the drawings for a specific item or system, the contractor shall use those products or materials. If products and materials are not listed in either of the above, use first class products and materials, in accordance with shop drawings.
- B. All products and materials shall be new, clean, free of defects and free of damage and corrosion.
- C. No permanent equipment shall be used to provide temporary services during construction.
- D. Ship and store all products and materials in a manner which will protect them from damage, weather and entry of debris. If items are damaged, do not install, but take immediate steps to obtain replacement or repair.
- E. Make certain that all materials selected directly, or by suppliers, conform to the requirements of the contract drawings and specification. Transmittal of such specifications and drawings, information to persons manufacturing and supplying materials to the City of New York, and rigid adherence thereto, is the contractor's responsibility. Acceptance of a manufacturer's name by the

Commissioner does not release the contractor of the responsibility for providing materials, which comply in all respects with the requirements in the Contract Documents.

- F. Applicable equipment and materials to be listed by Underwriters' Laboratories and Manufactured in accordance with ASME, AWWA, NFPA or ANSI standards, and as approved by the local authorities having jurisdiction.
- G. Fully lubricate all equipment when installed and prior to final acceptance.
- H. Locate valves, access doors, etc., to be easily accessible, either in mechanical spaces or through access panels specified herein.
- I. Follow manufacturers' instructions for installing, connecting, and adjusting all equipment. Provide one copy of such instructions to the Commissioner before installing any equipment. Provide a copy of such instructions at the equipment during any work on the equipment. Provide all special valves, piping, wiring and accessories.

1.9 SHOP DRAWINGS

- A. Submit shop drawings and manufacturer's data for the following items in accordance with the Contract Documents:
 - 1. Coordinated, detailed shop layout drawings of all mechanical rooms, services and distribution systems, including plans, profiles and sections.
 - 2. Details of piping supports, elbows, anchors and miscellaneous appurtenances.
 - 3. Hangers, supports, inserts, anchors, guides and foundations.
 - 4. Valves.
 - 5. Pressure gauges.
 - 6. Corrosion protective coatings.
 - 7. Schedule of pipe and fittings, materials and application, valves, escutcheons, air vents, valve tags and schedules, strainers, and water specialties.
 - 8. Access doors.
 - 9. Building automation systems including descriptions, instruments, and alarms.
 - 10. Equipment identification and certificates.
 - 11. Sprinkler heads and accessories.
 - 12. Other shop drawings and submittals as requested within the specification.

1.10 SAMPLES

- A. Submit samples of all items with exposed finishes for review.
- B. Allow sufficient time for consideration without interfering with job schedule.
- C. Duplicate quality and finish to type to be supplied under contract.
- D. Identify similar to shop drawings.

1.11 START-UP

- A. Check and clean all pipes of dirt and debris.
- B. Prepare each piece of equipment in accordance with manufacturer's installation instructions and have a copy at the equipment.
- C. Have representatives of each manufacturer present when hereinafter specified, so that equipment will be started up by manufacturer.

1.12 ACCESS DOORS IN FINISHED CONSTRUCTION

- A. Furnish access doors as required for operation and maintenance of concealed equipment and coordinate their delivery with the installing trade.
- B. Coordinate and prepare a location, size and function schedule of access doors required and deliver to the General Contractor and the Commissioner for review.
- C. Doors shall be of a size required for operating and repacking valves, and shall be as manufactured by Karp Associates, Nystrom Inc. or Mifab.
- D. Unless otherwise indicated, minimum size to be 18" x 18".
- E. Furnish color coded buttons or tabs to indicate location of valves or other equipment located above removable type ceilings where access doors are not required.

1.13 SYSTEMS IDENTIFICATION

A. Piping:

- 1. All exposed fire protection piping shall be finish painted red in color unless otherwise directed.
- 2. All piping, exposed or concealed, shall be identified as to its service in accordance with OSHA and ANSI Standards by one of the following methods:
 - a. Installation of manufactured adhesive band type identification markers, similar to "Quick-Label" by W.H. Brady Company.
- 3. Piping identification markings shall be installed as follows:
 - a. In each room.
 - b. All valve locations.
 - c. At shaft walls.
 - d. Every 40 feet on continuous runs.

B. Valves:

- 1. Valves shall be identified by tag system utilizing brass tags at 2-inch minimum diameter and attached to the valves using brass chain.
 - a. The new valve tag identification numbers shall be permanently added to all existing valve tag charts.

2. The service and function of all fire protection valves shall be identified at the valve by signs, similar to Potter Roemer Series 6300, attached to the valves by brass chains.

1.14 OPERATING & MAINTENANCE INSTRUCTION

A. Prepare an operating and maintenance instruction manual which includes the following:

1. Alphabetical list of all system components, with the name, address, and 24-hour phone number of the company responsible for servicing each item during the first year of operation.
2. Operating instructions for complete system, including:
 - a. Normal starting, operating, and shut-down.
 - b. Emergency procedures for fire or failure of major equipment.
 - c. Summer and winter special procedures.
 - d. Day and night special procedures.
3. Maintenance instructions, including:
 - a. Valve tag list and equipment tag list.
 - b. Required cleaning, replacement and/or adjustment schedule.
4. Manufacturer's data on each piece of equipment, including:
 - a. Installation instructions.
 - b. Drawings and specifications.
 - c. Parts list, including recommended items to be stocked.
 - d. Marked or revised prints locating all concealed parts and all variations from the original system design.
 - e. Test and inspection certificates.
5. Specific equipment data including, but not limited to, the following:
 - a. For Fire Protection System:
 - b. Piping.
 - c. Valves.
 - d. Accessories.
 - e. Sprinkler heads.
 - f. Tamper switches.
 - g. Flow switches.
 - h. Flow measuring devices.

B. Provide instruction of operating personnel.

1. Instruct the City of New York 's operating personnel in proper starting sequences, operation, shutdown, and maintenance procedures, including normal and emergency procedures.
2. Instruction to be by personnel skilled in operation of equipment. Instructions for major equipment to be by equipment manufacturers' representatives.
3. Make arrangements to give instructions by system and not by building areas.
4. Provide five (5) instruction sessions not to exceed six (6) hours each.

5. Instructions on automatic controls to be by manufacturer's representative.

C. Submittals.

1. Shop Drawings: Submit three copies for review prior to final issuance.
2. Provide 6 copies of each operation and maintenance manual.
 - a. Manuals to be 8-1/2" x 11" size in hard-back, 3-ring loose-leaf binders. Use more than one volume if required. Do not overfill binders.
 - b. Manuals to be completed and delivered to the Commissioner for approval at least 20 days prior to instruction of operating personnel.
3. Prepare separate manuals for the fire protection systems.

1.15 TOOLS FOR OPERATION, ADJUSTMENT AND MAINTENANCE

- A. Deliver to the City of New York 's representative all special tools needed for proper operation, adjustment and maintenance of equipment.

PART 2 - PRODUCTS

NOT USED.

PART 3 - EXECUTION

NOT USED.

END OF SECTION

SECTION 210553

IDENTIFICATION FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Equipment labels.
 - 2. Warning signs and labels.
 - 3. Pipe labels.
 - 4. Stencils.
 - 5. Valve tags.
 - 6. Warning tags.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Equipment-Label Schedule: Include a listing of all equipment to be labeled and the proposed content for each label.
- D. Valve Schedules: Valve numbering scheme.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each piping system to include in maintenance manuals.

PART 2 - PRODUCTS

2.1 EQUIPMENT LABELS

- A. Metal Labels for Equipment:
 - 1. Material and Thickness: stainless steel, 0.025 inch (0.64 mm) thick, with predrilled holes for attachment hardware.
 - 2. Letter Color: Black.
 - 3. Background Color: Yellow.
 - 4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch (64 by 19 mm).

5. Minimum Letter Size: 1/4 inch (6.4 mm) for name of units if viewing distance is less than 24 inches (600 mm), 1/2 inch (13 mm) for viewing distances up to 72 inches (1830 mm), and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
 6. Fasteners: Stainless-steel self-tapping screws.
 7. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- B. Label Content: Include equipment's Drawing designation or unique equipment number, Drawing numbers where equipment is indicated (plans, details, and schedules), and the Specification Section number and title where equipment is specified.
- C. Equipment-Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch (A4) bond paper. Tabulate equipment identification number and identify Drawing numbers where equipment is indicated (plans, details, and schedules) and the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

2.2 WARNING SIGNS AND LABELS

- A. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/8 inch (3.2 mm) thick, with predrilled holes for attachment hardware.
- B. Letter Color: Red.
- C. Background Color: White.
- D. Maximum Temperature: Able to withstand temperatures up to 160 deg F (71 deg C).
- E. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch (64 by 19 mm).
- F. Minimum Letter Size: 1/4 inch (6.4 mm) for name of units if viewing distance is less than 24 inches (600 mm), 1/2 inch (13 mm) for viewing distances up to 72 inches (1830 mm), and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
- G. Fasteners: Stainless-steel self-tapping screws.
- H. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.
- I. Label Content: Include caution and warning information, plus emergency notification instructions.

2.3 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service and showing flow direction.
- B. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- C. Pipe-Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings; pipe size; and an arrow indicating flow direction.
 - 1. Flow-Direction Arrows: Integral with piping-system service lettering to accommodate both directions, or as separate unit on each pipe label to indicate flow direction.
 - 2. Lettering Size: At least 1-1/2 inches (38 mm) high.
- D. Pipe-Label Colors:
 - 1. Background Color: Red.
 - 2. Letter Color: White.

2.4 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch (6.4-mm) letters for piping-system abbreviation and 1/2-inch (13-mm) numbers.
 - 1. Tag Material: stainless steel, 0.025 inch (0.64 mm) thick, with predrilled holes for attachment hardware.
 - 2. Fasteners: Brass wire-link chain.
 - 3. Valve-Tag Color: Red.
 - 4. Letter Color: White.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch (A4) bond paper. Tabulate valve number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
 - 1. Valve-tag schedule shall be included in operation and maintenance data.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

3.2 LABEL INSTALLATION

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install or permanently fasten labels on each major item of mechanical equipment.
- D. Locate equipment labels where accessible and visible.
- E. Piping Color-Coding: Painting of piping is specified in Section 099000 "Painting and Finishing".
- F. Pipe-Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
 - 1. Near each valve and control device.
 - 2. Near each branch connection excluding short takeoffs. Where flow pattern is not obvious, mark each pipe at branch.
 - 3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
 - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
 - 5. Near major equipment items and other points of origination and termination.
 - 6. Spaced at maximum intervals of along each run. Reduce intervals to 25 feet (7.6 m) in areas of congested piping and equipment.
 - 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.

3.3 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems. List tagged valves in a valve-tag schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and with captions similar to those indicated in "Valve-Tag Size and Shape" Subparagraph below:
 - 1. Valve-Tag Size and Shape:
 - a. Fire-Suppression Standpipe: 2 inches (50 mm), square.
 - b. Wet-Pipe Sprinkler System: 2 inches (50 mm), square.
 - c. Dry-Pipe Sprinkler Preaction System: 2 inches (50 mm), square.
 - d. Foam-Water System: 2 inches (50 mm), square.

END OF SECTION

SECTION 211313

WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Pipes, fittings, and specialties.
 - 2. Fire-protection valves.
 - 3. Sprinklers.
 - 4. Alarm devices.
 - 5. Manual control stations.
 - 6. Pressure gages.

1.3 DEFINITIONS

- A. Standard-Pressure Sprinkler Piping: Wet-pipe sprinkler system piping designed to operate at working pressure of 175 psig (1200 kPa) maximum.

1.4 SYSTEM DESCRIPTIONS

- A. Wet-Pipe Sprinkler System: Automatic sprinklers are attached to piping containing water and that is connected to water supply through alarm valve. Water discharges immediately from sprinklers when they are opened. Sprinklers open when heat melts fusible link or destroys frangible device. Hose connections are included if indicated.

1.5 PERFORMANCE REQUIREMENTS

- A. Standard-Pressure Piping System Component: Listed for 175-psig (1200-kPa) minimum working pressure.
- B. Sprinkler system design shall be approved by authorities having jurisdiction.
 - 1. Margin of Safety for Available Water Flow and Pressure: 10 percent, including losses through water-service piping, valves, and backflow preventers.
 - 2. Sprinkler Occupancy Hazard Classifications:
 - a. Building Service Areas: Ordinary Hazard, Group 1.
 - b. Electrical Equipment Rooms: Ordinary Hazard, Group 1.
 - c. General Storage Areas: Ordinary Hazard, Group 1
 - d. Laundries: Ordinary Hazard, Group 1.
 - e. Mechanical Equipment Rooms: Ordinary Hazard, Group 1.

- f. Office and Public Areas: Light Hazard.
3. Minimum Density for Automatic-Sprinkler Piping Design:
 - a. Light-Hazard Occupancy: 0.10 gpm over 1500-sq. ft. area.
 - b. Ordinary-Hazard, Group 1 Occupancy: [0.15 gpm over 1500-sq. ft. area.
 - c. Ordinary-Hazard, Group 2 Occupancy: [0.20 gpm over 1500-sq. ft. area.
 - d. Special Occupancy Hazard: As determined by authorities having jurisdiction.
 4. Maximum Protection Area per Sprinkler:
 - a. Office Spaces: 225 sq. ft. (20.9 sq. m).
 - b. Storage Areas: 130 sq. ft. (12.1 sq. m).
 - c. Mechanical Equipment Rooms: 130 sq. ft. (12.1 sq. m).
 - d. Electrical Equipment Rooms: 130 sq. ft. (12.1 sq. m).
 - e. Other Areas: According to NFPA 13 recommendations unless otherwise indicated.
 5. Total Combined Hose-Stream Demand Requirement: According to NFPA 13 unless otherwise indicated:
 - a. Light-Hazard Occupancies: 100 gpm (6.3 L/s) for 30 minutes.
- C. Seismic Performance: Sprinkler piping shall withstand the effects of earthquake motions determined according to NFPA 13.

1.6 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For wet-pipe sprinkler systems. Include plans, elevations, sections, details, and attachments to other work.
- C. Coordination Drawings: Sprinkler systems, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:
 1. Structural steel.
 2. Stage rigging system.
- D. Qualification Data: For qualified Installer[.
- E. Welding certificates.
- F. Fire-hydrant flow test report.
- G. Field Test Reports and Certificates: Indicate and interpret test results for compliance with performance requirements and as described in NFPA 13. Include "Contractor's Material and Test Certificate for Aboveground Piping."
- H. Field quality-control reports.

- I. Operation and Maintenance Data: For sprinkler specialties to include in emergency, operation, and maintenance manuals.
- 1.7 QUALITY ASSURANCE
- A. Installer Qualifications:
 1. Installer's responsibilities include fabricating and installing sprinkler systems.
 - B. Welding Qualifications: Qualify procedures and operators according to ASME Boiler and Pressure Vessel Code.
 - C. NFPA Standards: Sprinkler system equipment, specialties, accessories, installation, and testing shall comply with the following:
 1. NFPA 13, "Installation of Sprinkler Systems."
- 1.8 COORDINATION
- A. Coordinate layout and installation of sprinklers with other construction that penetrates ceilings, including light fixtures, HVAC equipment, and partition assemblies.
- 1.9 EXTRA MATERIALS
- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 1. Sprinkler Cabinets: Finished, wall-mounted, steel cabinet with hinged cover, and with space for minimum of six spare sprinklers plus sprinkler wrench. Include number of sprinklers required by NFPA 13 and sprinkler wrench. Include separate cabinet with sprinklers and wrench for each type of sprinkler used on Project.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, and fitting materials, and for joining methods for specific services, service locations, and pipe sizes.

2.2 STEEL PIPE AND FITTINGS

- A. Standard Weight, Schedule 40 Black-Steel Pipe: ASTM A 53/A 53M,. Pipe ends may be factory or field formed to match joining method.
- B. Malleable- or Ductile-Iron Unions: UL 860.
- C. Cast-Iron Flanges: ASME 16.1, Class 125.

- D. Steel Flanges and Flanged Fittings: ASME B16.5, Class 150.
- E. Grooved-Joint, Steel-Pipe Appurtenances:
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Anvil International, Inc.
 - b. Corcoran Piping System Co.
 - c. National Fittings, Inc.
 - d. Shurjoint Piping Products.
 - e. Tyco Fire & Building Products LP.
 - f. Victaulic Company.
 - 2. Pressure Rating: 175 psig (1200 kPa) minimum.
 - 3. Grooved-End-Pipe Couplings for Steel Piping: AWWA C606 and UL 213, rigid pattern, unless otherwise indicated, for steel-pipe dimensions. Include ferrous housing sections, EPDM-rubber gasket, and bolts and nuts.
- F. Steel Pressure-Seal Fittings: UL 213, FM-approved, 175-psig (1200-kPa) pressure rating with steel housing, rubber O-rings, and pipe stop; for use with fitting manufacturers' pressure-seal tools.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Victaulic Company.
 - b. Anvil International, Inc
 - c. National Fittings, Inc.

2.3 PIPING JOINING MATERIALS

- A. Pipe-Flange Gasket Materials:
 - 1. Class 125, Cast-Iron Flanges and Class 150, Bronze Flat-Face Flanges: Full-face gaskets.
 - 2. Class 250, Cast-Iron Flanges and Class 300, Steel Raised-Face Flanges: Ring-type gaskets.
- B. Metal, Pipe-Flange Bolts and Nuts: ASME B18.2.1, carbon steel unless otherwise indicated.

2.4 LISTED FIRE-PROTECTION VALVES

- A. General Requirements:
 - 1. Valves shall be UL listed or FM approved.
 - 2. Minimum Pressure Rating for Standard-Pressure Piping: 175 psig (1200 kPa).
- B. Iron OS&Y Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Cast Iron Pipe Company; Waterous Company Subsidiary.
 - b. American Valve, Inc.
 - c. .
 - d. Crane Co.; Crane Valve Group; Crane Valves.
 - e. Crane Co.; Crane Valve Group; Jenkins Valves.
 - f. Crane Co.; Crane Valve Group; Stockham Division.
 - g. Hammond Valve.
 - h. Milwaukee Valve Company.
 - i. Mueller Co.; Water Products Division.
 - j. NIBCO INC.
 - k. Tyco Fire & Building Products LP.
 - l. United Brass Works, Inc.
 - m. Watts Water Technologies, Inc.
2. Standard: UL 262.
3. Pressure Rating: 300 psig (2070 kPa).
4. Body Material: Cast or ductile iron.
5. End Connections: Flanged or grooved.

C. NRS Gate Valves:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. American Cast Iron Pipe Company; Waterous Company Subsidiary.
 - b. American Valve, Inc.
 - c. Crane Co.; Crane Valve Group; Stockham Division.
 - d. Kennedy Valve; a division of McWane, Inc.
 - e. Mueller Co.; Water Products Division.
 - f. NIBCO INC.
 - g. Tyco Fire & Building Products LP.
2. Standard: UL 262.
3. Pressure Rating: 300 psig (2070 kPa).
4. Body Material: Cast iron with indicator post flange.
5. Stem: Nonrising.
6. End Connections: Flanged or grooved.

2.5 SPRINKLER SPECIALTY PIPE FITTINGS

A. Branch Outlet Fittings:

1. Manufacturers: Subject to compliance with requirements, [provide products by one of the following]:
 - a. Anvil International, Inc.
 - b. National Fittings, Inc.
 - c. Shurjoint Piping Products.
 - d. Tyco Fire & Building Products LP.
 - e. Victaulic Company.
2. Standard: UL 213.

3. Pressure Rating: 300 psig (2070 kPa).
4. Body Material: Ductile-iron housing with EPDM seals and bolts and nuts.
5. Type: Mechanical-T and -cross fittings.
6. Configurations: Snap-on and strapless, ductile-iron housing with branch outlets.
7. Size: Of dimension to fit onto sprinkler main and with outlet connections as required to match connected branch piping.
8. Branch Outlets: threaded.

B. Branch Line Testers:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Elkhart Brass Mfg. Company, Inc.
 - b. Fire-End & Croker Corporation.
 - c. Potter Roemer.
2. Standard: UL 199.
3. Pressure Rating: 175 psig (1200 kPa).
4. Body Material: Brass.
5. Size: Same as connected piping.
6. Inlet: Threaded.
7. Drain Outlet: Threaded and capped.
8. Branch Outlet: Threaded, for sprinkler.

C. Adjustable Drop Nipples:

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. CECA, LLC.
 - b. Corcoran Piping System Co.
 - c. Merit Manufacturing; a division of Anvil International, Inc.
2. Standard: UL 1474.
3. Pressure Rating: 300 psig (2070 kPa).
4. Body Material: Steel pipe with EPDM-rubber O-ring seals.
5. Size: Same as connected piping.
6. Length: Adjustable.
7. Inlet and Outlet: Threaded.

2.6 SPRINKLERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Reliable Automatic Sprinkler Co., Inc.
2. Tyco Fire & Building Products LP.
3. Viking Corporation.

B. General Requirements:

1. Standard: UL's "Fire Protection Equipment Directory" listing or "Approval Guide," published by FM Global, listing.
 2. Pressure Rating for Residential Sprinklers: 175 psig (1200 kPa) maximum.
 3. Pressure Rating for Automatic Sprinklers: 175 psig (1200 kPa) minimum.
- C. Automatic Sprinklers with Heat-Responsive Element:
1. Early-Suppression, Fast-Response Applications: UL 1767.
 2. Nonresidential Applications: UL 199.
 3. Characteristics: Nominal 1/2-inch (12.7-mm) orifice with Discharge Coefficient K of 5.6, and for "Ordinary" temperature classification rating unless otherwise indicated or required by application.
- D. Open Sprinklers with Heat-Responsive Element Removed: UL 199.
1. Characteristics:
 - a. Nominal 1/2-inch (12.7-mm) Orifice: With Discharge Coefficient K between 5.3 and 5.8.
- E. Sprinkler Finishes:
1. Chrome plated.
 2. Bronze.
- F. Sprinkler Escutcheons: Materials, types, and finishes for the following sprinkler mounting applications. Escutcheons for concealed, flush, and recessed-type sprinklers are specified with sprinklers.
1. Ceiling Mounting: Chrome-plated steel, one piece, flat.
- G. Sprinkler Guards:
1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Reliable Automatic Sprinkler Co., Inc.
 - b. Tyco Fire & Building Products LP.
 - c. Victaulic Company.
 - d. Viking Corporation.
 2. Standard: UL 199.
 3. Type: Wire cage with fastening device for attaching to sprinkler.

PART 3 - EXECUTION

3.1 PIPING INSTALLATION

- A. Locations and Arrangements: Drawing plans, schematics, and diagrams indicate general location and arrangement of piping. Install piping as indicated, as far as practical.
 - 1. Deviations from approved working plans for piping require written approval from authorities having jurisdiction. File written approval with Commissioner before deviating from approved working plans.
- B. Piping Standard: Comply with requirements for installation of sprinkler piping in NFPA 13.
- C. Use listed fittings to make changes in direction, branch takeoffs from mains, and reductions in pipe sizes.
- D. Install unions adjacent to each valve in pipes NPS 2 (DN 50) and smaller.
- E. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 (DN 65) and larger end connections.
- F. Install sprinkler piping with drains for complete system drainage.
- G. Install sprinkler control valves, test assemblies, and drain risers adjacent to standpipes when sprinkler piping is connected to standpipes.
- H. Install hangers and supports for sprinkler system piping according to NFPA 13. Comply with requirements for hanger materials in NFPA 13.
- I. Install pressure gages on riser or feed main, at each sprinkler test connection, and at top of each standpipe. Include pressure gages with connection not less than NPS 1/4 (DN 8) and with soft metal seated globe valve, arranged for draining pipe between gage and valve. Install gages to permit removal, and install where they will not be subject to freezing.
- J. Fill sprinkler system piping with water.

3.2 JOINT CONSTRUCTION

- A. Install couplings, flanges, flanged fittings, unions, nipples, and transition and special fittings that have finish and pressure ratings same as or higher than system's pressure rating for aboveground applications unless otherwise indicated.
- B. Install unions adjacent to each valve in pipes NPS 2 (DN 50) and smaller.

- C. Install flanges, flange adapters, or couplings for grooved-end piping on valves, apparatus, and equipment having NPS 2-1/2 (DN 65) and larger end connections.
 - D. Ream ends of pipes and tubes and remove burrs. Bevel plain ends of steel pipe.
 - E. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
 - F. Flanged Joints: Select appropriate gasket material in size, type, and thickness suitable for water service. Join flanges with gasket and bolts according to ASME B31.9.
 - G. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
 - 1. Apply appropriate tape or thread compound to external pipe threads.
 - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
 - H. Dissimilar-Material Piping Joints: Make joints using adapters compatible with materials of both piping systems.
- 3.3 INSTALLATION OF COVER SYSTEM FOR SPRINKLER PIPING
- A. Install cover system, brackets, and cover components for sprinkler piping according to manufacturer's "Installation Manual" and with NFPA 13 or NFPA 13R for supports.
- 3.4 VALVE AND SPECIALTIES INSTALLATION
- A. Install listed fire-protection valves, trim and drain valves, specialty valves and trim, controls, and specialties according to NFPA 13 and authorities having jurisdiction.
 - B. Install listed fire-protection shutoff valves supervised open, located to control sources of water supply except from fire-department connections. Install permanent identification signs indicating portion of system controlled by each valve.
- 3.5 SPRINKLER INSTALLATION
- A. Install sprinklers as dimensioned on the contract drawings.
- 3.6 IDENTIFICATION
- A. Install labeling and pipe markers on piping according to requirements in NFPA 13.

3.7 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
- B. Tests and Inspections:
 - 1. Leak Test: After installation, charge systems and test for leaks. Repair leaks and retest until no leaks exist.
 - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
 - 3. Flush, test, and inspect sprinkler systems according to NFPA 13, "Systems Acceptance" Chapter.
 - 4. Energize circuits to electrical equipment and devices.
 - 5. Coordinate with fire-alarm tests. Operate as required.
 - 6. Coordinate with fire-pump tests. Operate as required.
 - 7. Verify that equipment hose threads are same as local fire-department equipment.
- C. Sprinkler piping system will be considered defective if it does not pass tests and inspections.
- D. Prepare test and inspection reports.

3.8 CLEANING

- A. Clean dirt and debris from sprinklers.
- B. Remove and replace sprinklers with paint other than factory finish.

3.9 DEMONSTRATION

- A. Engage a factory-authorized service representative to instruct the City of New York's maintenance personnel to adjust, operate, and maintain specialty valves.

3.10 PIPING SCHEDULE

- A. Piping between Fire-Department Connections and Check Valves: Galvanized, standard-weight steel pipe with threaded ends; cast-iron threaded fittings; and threaded joints.
- B. Sprinkler specialty fittings may be used, downstream of control valves, instead of specified fittings.
- C. Standard-pressure, wet-pipe sprinkler system, NPS 2-1/2 to NPS 4 (DN 65 to DN 100), shall be the following:
 - 1. Standard-weight Schedule 40, black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.
- D. Standard-pressure, wet-pipe sprinkler system, NPS 5 (DN 125) and larger shall be the following:

1. Standard-weight Schedule 40, black-steel pipe with threaded ends; uncoated, gray-iron threaded fittings; and threaded joints.

3.11 SPRINKLER SCHEDULE

A. Use sprinkler types in subparagraphs below for the following applications:

1. Rooms without Ceilings: Upright ,
2. Special Applications: quick-response sprinklers where indicated.

B. Provide sprinkler types in subparagraphs below with finishes indicated.

1. Upright Sprinklers: Chrome plated in finished spaces exposed to view; rough bronze in unfinished spaces not exposed to view.

END OF SECTION

THIS IS A BLANK PAGE

SECTION 260500

COMMON WORK RESULTS FOR ELECTRICAL

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1. Division 26 Section "Basic Electrical Materials and Methods".

1.2 SUMMARY

- A. This Section includes general requirements for electrical installations. These requirements are applicable to all Division 26 work. The following requirements are included in this Section to expand the requirements specified in Division 01:

1. Submittals.
2. Coordination drawings.
3. Record documents.
4. Maintenance manuals.
5. Rough-ins.
6. Electrical installations.
7. Cutting and patching.
8. Codes, Permits and Inspections.
9. Separation of Work between Trades.
10. Definitions and Interpretations.

1.3 SUBMITTALS

- A. General: Follow the procedures specified in Division 01 Section "Submittals."
- B. Additional copies may be required by individual sections of these Specifications.

1.4 SCOPE OF WORK

- A. The Contractor and his Subcontractors under this Division of the Specifications shall provide all required labor, materials, tools, equipment and services necessary for the complete and safe installation and properly operating electrical systems described and/or indicated herein or which may be reasonably implied as essential, whether mentioned in the Drawings and Specifications or not.
- B. This Contractor shall examine the complete set of the Contract Documents for this project in order to determine the extent of the Work required to be completed as part of this scope of work. Failure to examine the Contract Documents (all Divisions) will not relieve the contractor of the responsibility to

perform all work required for a complete, safe, fully operational and satisfactory installation.

1.5 COORDINATION DRAWINGS

A. Prepare coordination drawings in accordance with Division 01 to a scale of 1/4"=1'-0" or larger; detailing major elements, components, and systems of electrical equipment and materials in relationship with other systems, installations, and building components in spaces such as electric switchgear room, emergency generator room, electric closets. Indicate locations where space is limited for installation and access and where sequencing and coordination of installations are of importance to the efficient flow of the Work, including (but not necessarily limited to) the following:

1. Indicate the proposed locations of major raceway systems, equipment, and materials. Include the following:
 - a. Clearances for servicing equipment, including space for equipment disassembly required for periodic maintenance.
 - b. Exterior wall and foundation penetrations.
 - c. Fire-rated wall and floor penetrations.
 - d. Equipment connections and support details.
 - e. Sizes and location of required concrete pads and bases.
2. Indicate scheduling, sequencing, movement, and positioning of large equipment into the building during construction.
3. Prepare floor plans, and details to indicate penetrations in floors, walls, and ceilings and their relationship to other penetrations and installations.

B. Project Coordination Drawings

1. This Trade after showing all of the electrical work shall forward the completed reproducible Coordination Drawings to the General Contractor/Construction Manager.
2. The Electrical Contractor shall attend meetings arranged by the General Contractor/Construction Manager to resolve any real or apparent interferences or conflicts with the work of the other Contractors.
3. The Electrical Contractor shall then make adjustments to his work on the Coordination Drawings to resolve any real or apparent interferences or conflicts.
4. After any real or apparent interferences and conflicts have been incorporated into the Coordination Drawings, the Electrical Contractor shall "sign-off" of final Coordination Drawings.
5. The Electrical Contractor shall not install any of this work prior to "sign-off" of final Coordination Drawings. If the electrical work proceeds prior to sign-off of Coordination Drawings, any change to the electrical work to correct the interferences and conflicts which result will be made by the Electrical Contractor at no additional cost to the project.

1.6 MAINTENANCE MANUALS

- A. Prepare maintenance manuals in accordance with Division 01. In addition to the requirements specified in Division 01, include the following information for major equipment items such as engine generator set(s), UPS equipment, alarm system(s), communications systems, transformers, bus ways, switchboards, panel boards, automatic transfer switches, lighting fixtures, and other items as specified elsewhere.
 - 1. Description of function, normal operating characteristics and limitations, performance curves, engineering data and tests, and complete nomenclature and commercial numbers of replacement parts.
 - 2. Manufacturer's printed operating procedures to include start-up, break-in, and routine and normal operating instructions; regulation, control, stopping, shutdown, and emergency instructions.
 - 3. Maintenance procedures for routine preventative maintenance and troubleshooting; disassembly, repair, and reassembly; aligning and adjusting instructions.
 - 4. Servicing instructions.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to the project properly identified with names, model numbers, types, grades, compliance labels, and other information needed for identification.

1.8 DEFINITIONS AND INTERPRETATIONS

- A. Regardless of their usage in codes or other industry standards, certain words as used in the drawings or specifications for the electrical work, shall be understood to have the specific meanings ascribed to them in the following list:-
- B. "Circuitry" -- Any electric work (not limited to light and power distribution) which consists of wires, cables, raceways, and/or specialty wiring method assemblies taken all together complete with associated junction boxes, pull boxes, outlet boxes, joints, couplings, splices and connections except where limited to a lesser meaning by specific description.
- C. "Wiring" -- Same as Circuitry.
- D. "Circuit" -- Any specific run of circuitry.
- E. "Branch Circuit" -- Any light and power distribution system circuit which, at its load end, is directly connected to one or more electrical energy consuming items with no overcurrent protection devices interposed, other than (where required) those protecting the energy consuming items from overloading or overheating.
- F. "Appliance Panel" -- Any panel, used in a light and power distribution system, containing single pole and/or multi-pole branches rated in various sizes.

- G. "Lighting Panel" -- Any panel used in a light and power distribution system, having all (or the majority) of its branches single pole and rated the same.
- H. "Lighting and Appliance Branch Circuitry" -- All or any portion of branch circuits outgoing from a lighting or appliance panel or panelette.
- I. "Feeder" -- Any item of light and power circuitry used in a distribution system which is not lighting and appliance branch circuitry.
- J. "Main Feeder" -- Any feeder which, at its supply end, is connected through its own overcurrent protection (and switching) device, and none other, directly to a main service or a main service overcurrent protection (and switching) device.
- K. "Branch Feeder" -- A feeder, other than a main feeder, which complies with the definition of a branch circuit.
- L. "Submain Feeder" -- Any feeder which is neither a main feeder nor a branch feeder.
- M. "Distribution Panel" -- Any panel, used in a light and power distribution system, containing only multi-pole branches and with all (or the majority) of its branches used for feeders supplying other panels. "Power Panel" -- Same as distribution panel, except with all (or the majority) of its branches used for feeders which do not supply other panels.
- N. "Motor Power Circuit" -- Any circuit which operates nominally at 100 volts or more, and which carries electrical input energy to a motor.
- O. "Motor Control Circuit" (used in conjunction with a motor for which a magnetic starter is supplied) -- Any circuit (other than a motor power circuit), which operates nominally at 100 volts or more, and which carries current intended for directing or indicating the performance of a motor starter. "Motor Control Circuit" (used in conjunction with a motor for which a manual starter is supplied) -- Any circuit containing an extension of power circuit wires, other than those constituting the direct connection between source of supply, starter and motor.
- P. "Motor Control Actuating Device" -- Any device which performs a switching function in a motor control circuit (pushbuttons, automatic contacting devices, etc.).
- Q. "Motor Control Actuated Device" -- Any device which functions in response to voltage received from a motor control circuit (pilot lights, solenoids, etc.)
- R. "Package Unit" -- An item of equipment having one or more motors or other electric energy consuming elements integrally factory mounted on a single base, complete with all associated control devices and interconnecting wiring.
- S. "Low Voltage" -- Below 50 volts.
- T. "Process Control System" -- An overall control and/or logging system of a low voltage, electronic or pneumatic type available as a fully installed "package" from specialty manufacturers (commonly referred to as a "Temperature Control

System" or an "Automatic Control System" or a "Building Management System" where used in conjunction with air conditioning).

- U. "Grade Slab" -- A building floor slab which is in contact with or directly over grade (earth). "Building Confines" -- The extent of a building, as defined by the outside surfaces of its peripheral walls, the top surface of its roof, and the underside surface of its grade slab.
- V. "Distribution Switch" -- Any switch used in a light and power system other than a tumbler, toggle or specialty switch in the "wiring device" category.
- W. "Normal Electric Work Conditions" -- Locations within building confines which are neither damp, wet nor hazardous and which are not used for air handling.
- X. "Underground" -- Subsurface and exterior to building foundations.
- Y. "At Underside of Grade Slab" -- Under a grade slab and integrated into it.
- Z. "Below Grade Slab" -- Under a grade slab but not integrated into it.
- AA. "Standard" (as applied to wiring devices) -- Not of a separately designated individual type. "Raceway" -- Any pipe, duct, extended enclosure, or conduit (as specified for a particular system) which is used to contain wires, and which is of such nature as to require that the wires be installed by a "pulling in" procedure.
- BB. "Concealed" (as applied to circuitry) -- Covered completely by building materials, except for penetrations (by boxes and fittings) to a level flush with the surface as necessitated by functional or specified accessibility requirements.
- CC. "Exposed" (as applied to circuitry) -- Not covered in any way by building materials.
- DD. "Subject to Mechanical Damage" -- Exposed within seven feet of the floor in mechanical rooms, manufacturing spaces, vehicular spaces, or other spaces where heavy items (over 100 pounds) are moved around or rigged as a common practice or as required for replacement purposes.
- EE. "Secondary" (as applied to light and power distribution) -- Under 600 volts.
- FF. "Assembly" -- A defined set of elements of electric work.
- GG. Where the word "conduit" is used without specific reference to type, it shall be understood to mean "raceway."
- HH. Except where modified by a specific notation to the contrary, it shall be understood that the indication and/or description of any electrical item in the drawings and specifications for electrical work carries with it the instruction to furnish, install and connect the item as part of the electrical work regardless of whether or not this instruction is explicitly stated.
- II. It shall be understood that the specifications and drawings are complementary and are to be taken together for a complete interpretation of the work. Where there are conflicts between the drawings and specifications or within the

specifications or drawings themselves, the items of higher standard shall govern.

- JJ. To the extent that they govern the basic work, the specifications also govern change order work if any.
- KK. No exclusion from or limitation in, the symbolism used on the drawings for electrical work or the language used in the specifications for electrical work shall be interpreted as a reason for omitting the appurtenances or accessories necessary to complete any required system or item of equipment.
- LL. The drawings for electrical work utilize symbols and schematic diagrams which have no dimensional significance. The work shall, therefore, be installed to fulfill the diagrammatic intent expressed on the electrical drawings, but in conformity with the dimensions indicated on the final working drawings, field layouts and shop drawings of all trades. In particular, information as to the exact size, location and electrical connection points for specialized equipment shall be derived by reference to required documents.
- MM. Certain details appear on the drawings for electrical work which are specific with regard to the dimensioning and positioning of the work. These are intended only for general information purposes. They do not obviate field coordination for individual items of the indicated work.
- NN. Information as to general construction and Commissionerural general construction and Commissionerural features and finishes shall be derived from structural and Commissionerural drawings and specifications only.
- OO. The use of words in the singular shall not be considered as limiting where other indications denote that more than one item is referred to.
- PP. Ratings of devices, materials and equipment specified without reference to specific performance criteria shall be understood to be nominal or nameplate ratings established by means of industry standard procedures.

PART 2 - PRODUCTS

2.1 NOT USED

PART 3 - EXECUTION

3.1 ROUGH-IN

- A. Verify final locations for rough-ins with field measurements and with the requirements of the actual equipment to be connected.
- B. Refer to equipment specifications in Divisions 2 through 16 for rough-in requirements.

3.2 ELECTRICAL INSTALLATIONS

- A. General: Sequence, coordinate, and integrate the various elements of electrical systems, materials, and equipment. Comply with the following requirements:
1. Coordinate electrical systems, equipment, and materials installation with other building components.
 2. Verify all dimensions by field measurements.
 3. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for electrical installations.
 4. Coordinate the installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
 5. Sequence, coordinate, and integrate installations of electrical materials and equipment for efficient flow of the Work. Give particular attention to large equipment requiring positioning prior to closing in the building.
 6. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide the maximum headroom possible.
 7. Coordinate connection of electrical systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and controlling agencies. Provide required connection for each service.
 8. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings, to greatest extent possible. Conform to arrangements indicated by the Contract Documents, recognizing that portions of the Work are shown only in diagrammatic form. Where coordination requirements conflict with individual system requirements, refer conflict to the Commissioner.
 9. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components, where installed exposed in finished spaces.
 10. Install electrical equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. As much as practical, connect equipment for ease of disconnecting, with minimum of interference with other installations.
 11. Install access panel or doors where units are concealed behind finished surfaces. Refer to Division 26 Section "Basic Electrical Materials and Methods".
 12. Install systems, materials, and equipment giving right-of-way priority to systems required to be installed at a specified slope.

3.3 CUTTING AND PATCHING

- A. General: Perform cutting and patching in accordance with Division 1 Section "CUTTING AND PATCHING." In addition to the requirements specified in Division 1, the following requirements apply:

1. Perform cutting, fitting, and patching of electrical equipment and materials required to:
 - a. Uncover Work to provide for installation of ill-timed Work.
 - b. Remove and replace defective Work.
 - c. Remove and replace Work not conforming to requirements of the Contract Documents.
 - d. Upon written instructions from the Commissioner, uncover and restore Work to provide for Commissioner observation of concealed Work.
2. Protection of Installed Work: During cutting and patching operations, protect adjacent installations.

3.4 VOLTAGE

- A. 120/208 volt system shall be utilized for:
 1. All fluorescent lighting
 2. All motor loads $\frac{3}{4}$ HP and larger.
- B. Electrical Connections To Equipment And Systems
 1. Fuses, overload elements, control transformers, and accessories shall be supplied and installed under the Division supplying the starters, disconnect switches, and other control devices.
 2. The Division responsible for furnishing the equipment to be controlled shall furnish all control devices required for the equipment to operate, regardless of whether the device is to be wired in a control or power circuit.
 3. The horsepower rating of starters shall be checked against the actual motor to be controlled before installation, and correct size overload elements shall be provided in starters based on name plate and manufacturer's recommendations.

3.5 TESTING ADJUSTING AND BALANCING

- A. All tests shall be performed prior to acceptance of equipment and or systems.
- B. All tests shall be performed in accordance these specifications and applicable and or at least these codes:
 1. NFPA 70 2008, with NYC amendments.
- C. In addition to specific test requirements for systems indicated hereinafter all equipment components and systems shall be tested as follows:
- D. Polarity: A verification of polarity shall be made, and it shall be ensured that all fuses, circuit breakers and control devices are connected in the line side (hot) conductors only. Bayonet and Edison socket lamp holders shall have their outer shell connected to the neutral. Polarity of all receptacles shall be verified.

- E. Ground Continuity Test: A ground continuity test shall be made between main ground system and equipment frame, and system neutral. A minimum of 10 amps D.C. shall be used between ground reference and each ground point tested. Resistance shall be calculated and shall not exceed 25 ohms.
- F. Insulation:
1. This test shall be made before the installation is completed. The installation may be divided into sections containing up to 50 outlets. D.C. voltage of 1000 VDC shall be applied for the measurement of insulation resistance.
 2. When insulation resistance must be determined with all switchboards, panel boards, fuse holders, switches, and Overcurrent devices in place, the insulation resistance, when tested at 500 DVC shall be no less than 1 mega ohm for No.14 and No.12 AWG and 250k ohm for circuits 25 amps and above. Perform insulation resistance test of each cable with respect to ground and adjacent cable.
 3. Wherever practicable, so that all parts of the wiring may be tested, all lamps shall be removed and all current using apparatus shall be closed; where the removal of lamps and/or the disconnection of current using apparatus is impracticable, the local switches controlling such lamps and/or apparatus shall be open. This test is not applicable to ground concentric wiring system.
 4. Where apparatus is disconnected for the tests, the insulation resistance between the case and framework and all live parts of each item of fixed apparatus shall be measured separately and shall be not less than 0.5 mega ohm.
- G. Phase Balancing: All feeders and branch circuits shall be connected to panel board's main distribution panels, and switchboard, so that loads are distributed equally on all phases.
- H. Ground electrode Resistance
1. Prior to installing the ground electrode system, the contractor shall carry out ground resistance tests for all relevant locations.
 2. The total resistance of each ground electrode system shall be 25 ohm maximum between earth and ground.
- I. Distribution Cables
1. All main distribution cables shall be subjected to 1000 volt megger tests between phase – phase, and phase – earth. The minimum resistance acceptable shall be 1 megohm measured under damp conditions.
 2. Tests on cables shall be carried out after installation and joining.
- J. Lighting
1. Demonstrate to the City of New York's Representative that all lighting, ballasts, wiring and equipment are in proper condition. All fixtures shall be complete with clean and undamaged components.

- K. At the completion of this installation, the manufacturer shall issue a letter to the City of New York's Representative and the electrical Contractor certifying that the system is installed and operating in accordance with the contract documents and requirements of the local authorities. At that time, he shall submit to City of New York's Representative a proposal for a testing and maintenance contract, conducted as a regular service to the City of New York by factory-trained technical representative of the manufacturer of the system, as required by the local codes.

3.6 ADJUSTMENTS

- A. Adjustments of the system(s) shall be accomplished to the complete satisfaction of the City of New York's Representative at the time installation is completed.

END OF SECTION

SECTION 260510

BASIC ELECTRICAL MATERIALS AND METHODS

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Raceways.
 - 2. Building wire and connectors.
 - 3. Cutting and patching for electrical construction.
 - 4. Touchup painting.

1.3 DEFINITIONS

- A. EMT: Electrical metallic tubing.
- B. FMC: Flexible metal conduit.
- C. IMC: Intermediate metal conduit.
- D. LFMC: Liquidtight flexible metal conduit.
- E. RNC: Rigid nonmetallic conduit.

1.4 SUBMITTALS

- A. Field Test Reports: Indicate and interpret test results for compliance with performance requirements.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.
- B. Comply with current edition of National Electrical Code , with NYC amendments.

1.6 COORDINATION

- A. Coordinate chases, slots, inserts, sleeves, and openings with general construction work and arrange in building structure during progress of construction to facilitate the electrical installations that follow.
 - 1. Set inserts and sleeves in poured in place concrete, masonry work, and other structural components as they are constructed.
- B. Sequence, coordinate, and integrate installing electrical materials and equipment for efficient flow of the Work. Coordinate installing large equipment requiring positioning before closing in the building.
- C. Coordinate electrical service connections to components furnished by utility companies.
 - 1. Coordinate installation and connection of exterior underground and overhead utilities and services.
 - 2. Comply with requirements of authorities having jurisdiction and of utility company providing electrical power and other services.

PART 2 - PRODUCTS

2.1 TOUCHUP PAINT

- A. For Equipment: Equipment manufacturer's paint selected to match installed equipment finish.
- B. Galvanized Surfaces: Zinc rich paint recommended by item manufacturer.

PART 3 - EXECUTION

3.1 ELECTRICAL EQUIPMENT INSTALLATION

- A. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide the maximum possible headroom.
- B. Materials and Components: Install level, plumb, and parallel and perpendicular to other building systems and components, unless otherwise indicated.
- C. Equipment: Install to facilitate service, maintenance, and repair or replacement of components. Connect for ease of disconnecting, with minimum interference with other installations.

- D. Right of Way: Give to raceways and piping systems installed at a required slope.

3.2 FIRESTOPPING

- A. Apply firestopping to cable and raceway penetrations of fire rated floor and wall assemblies to achieve fire resistance rating of the assembly. Firestopping materials and installation requirements are specified in Division 07 Section "Firestopping."

3.3 CUTTING AND PATCHING

- A. Cut, channel, chase, and drill floors, walls, partitions, ceilings, and other surfaces required to permit electrical installations. Perform cutting by skilled mechanics of trades involved.
- B. Repair and refinish disturbed finish materials and other surfaces to match adjacent undisturbed surfaces. Install new fireproofing where existing firestopping has been disturbed. Repair and refinish materials and other surfaces by skilled mechanics of trades involved.

3.4 FIELD QUALITY CONTROL

- A. Inspect installed components for damage and faulty work, including the following:
 - 1. Cutting and patching for electrical construction.
 - 2. Touchup painting.

3.5 REFINISHING AND TOUCHUP PAINTING

- A. Clean damaged and disturbed areas and apply primer, intermediate, and finish coats to suit the degree of damage at each location.
- B. Follow paint manufacturer's written instructions for surface preparation and for timing and application of successive coats.
- C. Repair damage to galvanized finishes with zinc rich paint recommended by manufacturer.
- D. Repair damage to PVC or paint finishes with matching touchup coating recommended by manufacturer.

3.6 CLEANING AND PROTECTION

- A. On completion of installation, including outlets, fittings, and devices, inspect exposed finish. Remove burrs, dirt, paint spots, and construction debris.
- B. Protect equipment and installations and maintain conditions to ensure that coatings, finishes, and cabinets are without damage or deterioration at time of Substantial Completion.

END OF SECTION

SECTION 260524

FEEDERS AND BRANCH CIRCUITRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section

1.2 SUMMARY

- A. This Section includes basic requirements for the installation of light and power feeders and circuitry run at less than 600 volts.
- B. Related Sections: The following sections contain requirements that relate to this Section:
 - 1. Division 26, Section 260533 "Raceways and Boxes for Electrical Systems."

1.3 SUBMITTALS

- A. General: Submit the following in accordance with Conditions of Contract and Division 01 Specification Sections.
- B. Circuited up "as-built" drawings and panel directories as called for in the Division 26 related sections.

1.4 QUALITY ASSURANCE

- A. Installation shall comply with current "NYC Electrical Code".

PART 2 - PRODUCTS

2.1 GENERAL

- A. Products shall be as specified in the Division 26 related sections.

PART 3 - EXECUTION

3.1 INSTALLATION OF FEEDERS

- A. Feeder connections shall be in the phase rotation which establishes proper operation for all equipment supplied.

- B. Feeders consisting of multiple cables and raceways shall be arranged such that each raceway of the feeder contains one cable for each phase leg (and one neutral cable if any).
- C. Each individual tap off a feeder which consists of multiple cables per phase (and neutral if any) shall be arranged so that all of the cables of a phase leg (and neutral if any) of the feeder are connected to the corresponding phase leg (and neutral if any) of the individual tap.
- D. Indications of conductor sizing for three phase and three phase/four wire feeders shall, unless otherwise noted on the drawings, be understood as follows:
 - 1. (3) equally sized conductors represents a three phase feeder.
 - 2. (4) equally sized conductors represents a three phase/4 wire feeder with 100% neutral.
 - 3. (3) equally sized conductors plus (1) smaller conductor represents a three phase/three wire feeder plus ground wire.
 - 4. (3) equally sized conductors plus (1) larger conductor or (2) equally sized conductors represents a three phase/4 wire feeder with neutral oversized to accommodate "harmonic-rich loads."
 - 5. (3) equally sized conductors plus (1) larger conductor or (2) equally sized conductors and one smaller conductor represents a three phase/four wire feeder with neutral oversized to accommodate "harmonic-rich" loads plus a ground wire.

3.2 INSTALLATION OF LIGHTING AND APPLIANCE BRANCH CIRCUITRY

- A. Circuitry indicated without sizing shall be understood to be lighting and appliance branch circuitry protected at 20 amps or less.
- B. Conform all lighting and appliance branch circuitry (regardless of whether protected above or below 20 amps) to the following:-
 - 1. Except as noted below, circuitry shall be multi-wire utilizing common neutrals arranged so that no neutral conductor acts as a common wire for more than one circuit conductor connected to the same phase leg of the supply system.
 - 2. Common neutrals shall not be utilized for circuitry runs containing more than (6) 120 volt receptacle circuits within a single raceway (conduit, cellular deck, underfloor duct) except as specified hereinafter for home runs in main header runs of underfloor electrification systems.
 - 3. Conductors used as common neutrals for multiple (2 or 3) 120 volt branch circuits protected at 20 amps or less shall be #10 AWG where such circuits supply receptacles which are dedicated to - or may be utilized for - "harmonic-rich" loads such as personal computers, computer terminals, word processors, printers and the like. Accordingly, common neutrals supplying receptacles shall be understood to be #10 AWG under the following conditions:
 - a. Wherever so indicated (by note or otherwise) on the drawings.
 - b. Throughout all office areas, computer rooms or other data processing spaces, laboratories.

4. Branch circuitry supplying relay controlled lighting fixtures shall be understood to include all necessary interconnections between the control panels containing the relays and the associated lighting or appliance panels.
 5. Under no condition shall any local switch break a neutral conductor.
 6. At any location where lighting and appliance branch circuitry is extended from a flush mounted panel-board to a suspended ceiling immediately above, at least four 1-inch empty conduits shall be included (in addition to those required for active circuitry) to permit future wiring escape from the panel-board. The empty conduits shall extend up from the panel and shall terminate in a threaded conduit cap immediately after turning out into the hung ceiling space.
 7. Raceway sizes shall conform to standard maximum permissible occupancy requirements except where these are exceeded by other requirements specified elsewhere.
 8. Two and three pole branches in panels shall be used respectively for individual single phase load items connected line to line and individual three phase load items. Where circuitry indications require the use of 2-pole and/or 3-pole branch breakers which have not been scheduled, provide in the panelboards the required multi-pole breakers in lieu of the equivalent number of single pole branch breakers. Required quantities of single, two and three pole branch breakers shall be confirmed prior to ordering panels.
- C. Conform lighting and appliance branch circuitry, indicated as being protected at 20 amps or less, to the following:-
1. 120 volt circuitry shall be supplied from 15 amp panel branches except as indicated.
 2. 265 volt circuitry shall be supplied from 20 amp panel branches.
 3. Common neutrals shall not be utilized for circuitry runs containing more than (6) 120 volt receptacle circuits within a single raceway (conduit) except as noted below.
 4. Conductors for 120 volt circuitry extending in excess of 75 feet, from the point of supply, to the first outlet shall be #10 AWG (minimum) copper to the first outlet. Increase beyond #10 AWG if required for compliance with code-mandated voltage drop restrictions.
 5. Conductors 265 volt circuitry extending in excess of 150 feet, from the point of supply, to the first outlet shall be #10 AWG (minimum) copper to the first outlet. Increase beyond #10 AWG if required for compliance with code-mandated voltage drop restrictions.
 6. Conductors used in runs consisting of more than six wires (exclusive of grounding conductors) in a single raceway shall be #10 AWG copper minimum. Increase beyond #10 AWG as required to comply with code-mandated derating factors, and as specified hereinbefore.
 7. Circuits supplying receptacles which are not of the ground fault circuit interrupting type, and are located as noted below, shall be connected to panel branches that are equipped with ground fault interrupting features:
 - a. Receptacles located within 6 feet of any sink and intended to serve counter top surfaces.

- b. All receptacles mounted on building exterior surfaces including those on balconies.
 - c. All receptacles mounted in elevator machine rooms, machinery spaces and pits.
8. Circuits supplying and pipe tracing cable and HWAT cable shall be connected to panel branches equipped with 30 ma interrupting features for equipment protection.
- D. Where circuitry has not been delineated for lighting fixtures, receptacles, switches and miscellaneous items intended for protection at 20 amps, such items shall be provided with circuitry conforming to the requirements listed below. Prior to installation of circuitry, submit for review floor plans showing circuit numbers, home runs, and interconnecting circuitry for all such items.
- 1. When circuiting up recessed ceiling lighting fixtures, connect fixtures on the basis of more than one fixture to a single outlet box, in an approved manner, as required to insure that circuits will not be unnecessarily lightly loaded due to mandated, restrictions on the maximum number of outlets per circuit. Except with special permission, unnecessarily light loading shall be understood to mean, less than 1000 volt amps (VA) on a 120 volt and less than 3200 VA on a 277 volt circuit.
 - 2. The total load on a circuit shall be computed by ascribing volt-amps to individual items on the basis of the following:-

ITEM	VOLT-AMPS (VA)
Any lighting fixture.	Input volt-amps as per lighting fixture schedule.
Any outlet with no specific wattage or circuiting instruction indicated.	180 volts
Any outlet (other than for resistance heating) with wattage indicated.	1.15 x Indicated wattage
Any resistance heating outlet with wattage indicated.	1.0 x Indicated wattage
Any fractional HP motor with HP indicated.	2500 x Indicated HP
Any outlet with amps indicated.	120 x Indicated amps

3. Not more than (10) outlets nor 1300 total VA shall be applied to a single 15 amp 120 volt panel branch circuit. Not more than (20) outlets nor 4000 VA shall be applied to a 265 volt panel branch circuit.
4. Not more than (2) outlets nor 1650 VA shall be applied to a single 20 amp, 120 volt panel branch circuit.
5. Where circuitry involves connection of more than (10) lighting fixtures to a single 120 volt circuit or (20) lighting fixtures to a 265 volt circuit, it shall be understood that multiple lighting fixtures shall be connected to individual outlet boxes in an approved manner, and that the restriction on the number of outlets per circuit specified above pertains to the number of outlet boxes not lighting fixtures. Circuitry arrangements utilizing an excess number of panel branch circuits because of failure to multiply connect lighting fixtures to outlet boxes will require approximate correction to eliminate such excess circuit use.
6. A separate 20 amp circuit supplying more than two 120 volt outlets shall be utilized for outlets indicated as "Appliance Circuit" outlets.
7. A separate 20 amp panel branch circuit supplying no other outlets shall be used for each outlet indicated as an "individual appliance circuit" "heavy duty" outlet.
8. Not more than 1300 total VA shall be applied to any 15 amp, 120 volt panel branch circuit nor more than 1450 VA to any 20 amp, 120 volt branch circuit. Not more than 4000 VA shall be applied to any 265 panel branch circuit.
9. A separate 20 amp panel branch circuit supplying no other outlets shall be used for each outlet indicated as an "individual appliance circuit" "heavy duty" outlet.
10. Lighting fixture shall be connected to 20 amp panel branch circuits. Solidly connected equipment less than 1300 VA shall be connected to 15 amp panel branch circuits except as indicated or noted herein.
11. Any installed lighting and appliance branch circuitry, found (as a result of unnecessarily light loading of conductors) to make excessive use of panel branches, shall be rearranged.
12. Circuits shall be balanced on phases at their supply point as evenly as possible.
13. The final arrangement of lighting and appliance branch circuitry shall be fully delineated on the record, or "as-built" drawings called for elsewhere.

END OF SECTION

THIS IS A BLANK PAGE

SECTION 260526

GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. Division 26, Section 260533 "Raceways and Boxes for Electrical Systems."

1.2 SUMMARY

- A. This Section includes grounding of electrical systems and equipment. Grounding requirements specified in this Section may be supplemented in other sections of these Specifications.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Field Test Reports: Submit written test reports to include the following:
 - 1. Test procedures used.
 - 2. Test results that comply with requirements.
 - 3. Results of failed tests and corrective action taken to achieve test results that comply with requirements.

1.4 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by Underwriters Laboratories, Inc.
 - 1. Comply with UL 467.
- B. Comply with NFPA 780 and UL 96 when interconnecting with lightning protection system.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated in the Work include, but are not limited to, the following:
 - 1. Erico Products, Inc.
 - 2. Ideal Industries, Inc.

3. Kearney.
4. O-Z/Gedney Co.
5. Raco, Inc.
6. Thomas & Betts, Electrical

2.2 CONNECTOR PRODUCTS

- A. Comply with IEEE 837 and UL 467; listed for use for specific types, sizes, and combinations of conductors and connected items.
- B. Bolted Connectors: Bolted-pressure-type connectors, or compression type.
- C. Welded Connectors: Exothermic-welded type, in kit form, and selected per manufacturer's written instructions.

2.3 MISCELLANEOUS CONDUCTORS

- A. Ground Bus: Bare annealed copper bars of rectangular cross section.
- B. Braided Bonding Jumpers: Copper tape, braided No. 30 gage bare copper wire, terminated with copper ferrules.
- C. Bonding Strap Conductor/Connectors: Soft copper, 0.05 inch thick and 2 inches wide, except as indicated.

2.4 CONNECTOR PRODUCTS

- A. Pressure Connectors: High-conductivity-plated units.
- B. Bolted Clamps: Heavy-duty type.
- C. Exothermic Welded Connections: Provided in kit form and selected per manufacturer's instructions for the specific types, sizes, and combinations of conductors and other items to be connected.

PART 3 - EXECUTION

3.1 APPLICATION

- A. Equipment Grounding Conductor Application: Comply with current, "New York City Electrical Code" for sizes and quantities of equipment grounding conductors, except where specific types, larger sizes or more conductors are indicated.
 1. Install equipment grounding conductors with circuit conductors for the following in addition to those locations where required by Code:
 - a. All feeders and branch circuits.
 - b. Feeders.
 - c. Lighting circuits.
 - d. Receptacle circuits.

2. Nonmetallic Raceways: Install an insulated equipment ground conductor in nonmetallic raceways unless they are designated for telephone or data cables.
- B. Bond metallic conduits containing grounding electrode conductors and main bonding conductors to the ground bus service enclosure and/or grounding electrode at both ends of each run utilizing grounding bushings and jumpers. Bonding jumpers shall be sized equal to the grounding electrode conductors.
 - C. Provide grounding bonds for all metallic conduits of the light and power system which terminate at (or in pits below) distribution equipment for which a ground bus is specified. Accomplish this by equipping the conduits with bushings of the grounding type connected individually to the ground bus.
 - D. Provide supplementary ground bonding to maintain continuity of the equipment and raceway grounding system as follows:
 1. Bonding jumpers applied where wiring devices (receptacles and switches) are not equipped with approved self-grounding features. Include any necessary field modifications for termination of the bonding jumpers so as to insure grounding continuity.
 2. Bonding jumpers applied to insure that grounding continuity does not depend solely on the supporting screws fastening metallic enclosures together.
 3. Include any necessary field modifications for termination of the bonding jumpers so as to insure grounding continuity.
 - E. Where specifically noted on the drawings, or described hereinbefore in this Section, include insulated equipment and raceway grounding conductors run within the raceways. Where insulated equipment grounding conductors required for feeders have not been included in the quantities of conductors indicated on the drawings, incorporate such conductors in accordance with the following table. Adjust conduit sizing if required.

GROUNDING		GROUNDING	
OCD AMPS	CONDUCTOR (CU)	OCD AMPS	CONDUCTOR (CU)
15-20	#12	1000	*3 X 2/0
25-60	#10	1200	*4 X 3/0
70-100	#8	1600	*5 X 4/0
110-200	#4	2000	*6 X 250 MCM
225-400	*#2	2500	*7 X 350 MCM
500-600	*2 X #1	3000	*8 X 400 MCM
700-800	*2 X 1/0	4000	*11 X 500 MCM

* Adjust quantity (if needed) to match number of conduits in run.

3.2 INSTALLATION

- A. General: Ground electrical systems and equipment according to NYC Electrical Code requirements, except where Drawings or Specifications exceed such requirements.
- B. Bond interior metal piping systems and metal air ducts to equipment grounding conductors of associated pumps, fans, blowers, electric heaters, and air cleaners. Use braided-type bonding straps.

3.3 CONNECTIONS

- A. General: Make connections so possibility of galvanic action or electrolysis is minimized. Select connectors, connection hardware, conductors, and connection methods so metals in direct contact will be galvanically compatible.
 1. Use electroplated or hot-tin-coated materials to assure high conductivity and to make contact points closer in order of galvanic series.
 2. Make connections with clean, bare metal at points of contact.
 3. Coat and seal connections having dissimilar metals with inert material to prevent future penetration of moisture to contact surfaces.
- B. Exothermic-Welded Connections: Use for connections to structural steel and for underground connections, except those at test wells. Comply with manufacturer's written instructions. Welds that are puffed up or that show convex surfaces indicating improper cleaning are not acceptable.
- C. Equipment Grounding-Wire Terminations: For No. 8 AWG and larger, use pressure-type grounding lugs. No. 10 AWG and smaller grounding conductors may be terminated with winged pressure-type connectors.
- D. Noncontact Metal Raceway Terminations: Where metallic raceways terminate at metal housings without mechanical and electrical connection to housing, terminate each conduit with a grounding bushing. Connect grounding bushings

with a bare grounding conductor to grounding bus or terminal in housing. Bond electrically noncontinuous conduits at both entrances and exits with grounding bushings and bare grounding conductors, except as otherwise indicated.

- E. Tighten screws and bolts for grounding and bonding connectors and terminals according to manufacturer's published torque-tightening values. Where these requirements are not available, use those specified in UL 486A and UL 486B.
- F. Compression-Type Connections: Use hydraulic compression tools to provide correct circumferential pressure for compression connectors. Use tools and dies recommended by manufacturer of connectors. Provide embossing die code or other standard method to make a visible indication that a connector has been adequately compressed on grounding conductor.
- G. Moisture Protection: Where insulated grounding conductors are connected to grounding rods or grounding buses, insulate entire area of connection and seal against moisture penetration of insulation and cable.

3.4 FIELD QUALITY CONTROL

- A. Testing Agency: Engage an electrical testing organization to perform tests described below.
- B. Tests: Subject the completed grounding system to a megger test at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal. Measure ground resistance not less than 2 full days after the last trace of precipitation, and without the soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance. Perform tests by the fall-of-potential method according to IEEE 81.
- C. Maximum grounding resistance shall be 3 ohms.
 - 1. Equipment Rated 500 kVA and Less: 10 ohms.
- D. Excessive Ground Resistance: Where resistance to ground exceeds specified values, notify Commissioner promptly and include recommendations to reduce ground resistance and to accomplish recommended work.
- E. Report: Prepare test reports, certified by the testing organization, of ground resistance at each test location. Include observations of weather and other phenomena that may affect test results. Describe measures taken to improve test results.

END OF SECTION

THIS IS A BLANK PAGE

- B. Material and Construction: Sheet metal sized and shaped as indicated, NEMA 1.
- C. Fittings and Accessories: Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.
- D. Select features, unless otherwise indicated, as required to complete wiring system and to comply with current National Electrical Code.
- E. Wireway Covers: Screw-cover type.
- F. Finish: Manufacturer's standard enamel finish.

2.3 SURFACE RACEWAYS

- A. Surface Metal Raceway: Brushed stainless steel with snap-on covers.
 - 1. Available Manufacturers:
 - a. Airey-Thompson Sentinel Lighting: Wiremold Company (The).
 - b. Thomas & Betts Corporation.
 - c. Walker Systems, Inc; Wiremold Company (The)
 - d. The Wiremold Co., Electrical Sales Division.
- B. Types, sizes and channels as indicated and required for each application, with fittings that match and mate with raceways.

2.4 BOXES, ENCLOSURES AND CABINETS

- A. Available Manufacturers:
 - 1. Cooper Crouse-Hinds; Div. Of Cooper Industries, Inc.
 - 2. Emerson/General Signal; Appleton Electric Company.
 - 3. Erickson Electrical Equipment Co.
 - 4. Hoffman.
 - 5. Hubbell, Inc.; Killark Electric Manufacturing Co.
 - 6. O-Z/Gedney; Unit of General Signal.
 - 7. RACO; Division of Hubbell, Inc.
 - 8. Spring City Electrical Manufacturing Co.
 - 9. Thomas & Betts Corporation.
 - 10. Walker Systems Inc.; Wiremold Company (The).
- B. Sheet Metal Outlet and Device Boxes: NEMA OS 1.
- C. Cast Metal Outlet and Device Boxes: NEMA FB 1, Type FD, with gasketed cover.
- D. Floor Boxes: Cast metal, fully adjustable, rectangular.

- E. Small Sheet Metal Pull and Junction Boxes: NEMA OS 1.
- F. Cast Metal Pull and Junction Boxes: NEMA FP 1 cast aluminum with gasketed cover.
- G. Cabinets: NEMA 250, Type 1, galvanized steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel. Hinged door in front cover with flush latch and associated hinge. Key latch to match panelboards. Include metal barriers to separate wiring of different systems and voltage and include accessory feet where required for freestanding equipment.

2.5 FACTORY FINISHES

- A. Finish: For raceway, enclosure, or cabinet components, Provide manufacturer's standard prime-coat finish ready for field painting.
- B. Finish: For raceway, enclosure or cabinet components, provide manufacture's standard prime-coat finish ready for field painting.

PART 3 - EXECUTION

3.1 RACEWAY APPLICATION

- A. Outdoors: (Use the following wiring methods, except as specifically noted otherwise).
 - 1. Exposed: Rigid steel or IMC.
 - 2. Concealed: Rigid steel or IMC.
 - 3. Boxes and Enclosures: NEMA 250, Type 3R or 4.
- B. Indoors (use the following wiring methods):
 - 1. IMC for all purposes and in all applications except where specifically excluded, or where alternate methods are specified below.
 - 2. Normal and emergency feeders to fire pumps: Rigid steel conduit. Conduit encased in 2" of concrete (or other approved equivalent) where conduits are not physically routed outside the building. Exclude concrete for jockey pumps and/or auxiliary pumps.
 - 3. Normal and emergency feeders to smoke exhaust fans, stair pressurization fans, booster pumps, jockey pumps, auxiliary pumps: Rigid Steel Conduit.
 - 4. Normal and emergency feeders routed through, above or under area occupied by stationary personnel or cage animals shall be Rigid Steel Conduit.
 - 5. Utilize EMT for:
 - a. Main and submain feeders.
 - b. Branch feeders.

- c. Lighting and appliance branch circuitry.
- 6. Armored cable (Type AC) as specified in Section 26 05 23 is acceptable as an alternate wiring method for lighting and appliance branch circuitry for runs concealed in the voids of hung ceilings and hollow partitions.
- 7. Refer to appropriate Sections of Division 26 for additional requirements relating to wiring methods for control/signal transmission, fire alarm systems, telecommunications, and other communication and alarm system distribution.
- 8. Wiring methods listed above shall be restricted as follows:
 - a. Exclude EMT from concrete embedment, from locations where subject to mechanical damage and from exposed locations in finished spaces.
 - b. Exclude surface metal raceway from concealed installations, from locations where subject to mechanical damage and from wet or damp locations.
 - c. Exclude armored cable from exposed locations and from runs opening into wet or damp locations.
 - d. Exclude armored cable from circuitry used for emergency circuitry.
 - e. Exclude armored cable (Type AC) from areas of public assembly and all spaces (including voids of walls and ceilings) not separated there from by fire rated construction adequate for the purpose.
 - f. Utilize only intermediate or rigid steel conduit from runs in (or opening into) hazardous areas. Comply with electric code requirements regarding sealing fittings, boxes, enclosures as appropriate for the conditions of atmospheric contamination.
- C. The following shall be treated as damp or wet locations within building confines, regardless of whether or not a high ambient moisture level is found to exist:
 - 1. Spaces where any designations indicating weatherproof (WP) or vaporproof (VP) appear on the drawings.
 - 2. Electric work in slabs, walls or suspended ceilings which bound on a space defined as a damp or wet location shall meet the damp or wet location requirements if it enters into, or opens into the damp or wet location in any way.
- D. Minimum Raceway Size: 3/4 inch trade size DN 21.
- E. Raceway Fittings: Compatible with raceways and suitable for use and location.
 - 1. Intermediate Steel Conduit: Use threaded rigid steel conduit fittings, unless otherwise indicated.

3.2 INSTALLATION

- A. Keep raceways at least 6 inches (150 mm) away from parallel runs of flues and steam or hot water pipes. Install horizontal raceway runs above water and steam piping.

- B. Complete raceway installation before starting conductor installation.
- C. Support raceway as specified in Division 26, Section 26 05 10 "Basic Electrical Materials and Methods."
- D. Install temporary closures to prevent foreign matter from entering raceway.
- E. Protect stub-ups from damage where conduits rise through floor slabs. Arrange so curved portion of bends is not visible above the finished slab.
- F. Make bends and offsets so the inside diameter is not reduced. Unless otherwise indicated, keep the legs of a bend in the same plane and the straight legs of offsets parallel.
- G. Conceal conduit and EMT within finished walls, ceilings, and floors, unless otherwise indicated.
 - 1. Install concealed raceways with a minimum of bends in the shortest practical distance, considering type of building construction and obstructions, unless otherwise indicated.
- H. Raceways Embedded in Slabs: Not allowed.
- I. Raceways Embedded below Slabs: Not Allowed.
- J. Install exposed raceways parallel to or at right angles to nearby surfaces or structural members, and follow the surface contours as much possible.
 - 1. Run parallel or banked raceways together on common supports.
 - 2. Make parallel bends in parallel or banked runs. Use factory elbows only where elbows can be installed parallel; otherwise, provide field bends for parallel raceways.
- K. Join raceways with fittings designed and approved for the purpose and make joints tight.
 - 1. Use insulating bushings to protect conductors.
- L. Tighten set screws of threadless fittings with suitable tool.
- M. Terminations:
 - 1. Where raceways are terminated with locknuts and bushings, align the raceway to enter squarely, and install the locknuts with dished part against the box. Use two locknuts, one inside and one outside box.
 - 2. Where terminating in threaded hubs, screw the raceway or fitting tight into the hub so the end bears against the wire protection shoulder. Where chase nipples are used, align the raceway so the coupling is square to the box, and tighten the chase nipple so no threads are exposed.

- N. Install pull wires in empty raceways. Use No. 14 AWG zinc-coated steel or monofilament plastic line having not less than 200-lb (90 kg) tensile strength. Leave not less than 12 inches (300 mm) of slack at each end of the pull wire.
- O. Install raceway sealing fittings according to the manufacturer's written instructions. Locate fittings at suitable, approved, accessible locations and fill them with UL-listed sealing compound. For concealed raceways, install each fitting in a flush steel box with a blank cover plate having a finish similar to that of adjacent plates or surfaces. Install raceway sealing fittings at the following points and elsewhere as indicated:
 - 1. Where conduits pass from warm locations to cold locations, such as the boundaries of refrigerated spaces and air-conditioned spaces.
 - 2. Where conduits enter or leave hazardous or explosion proof areas.
 - 3. Where otherwise required by the NFPA70.
- P. Flexible Connections: Use maximum of 6 feet (1830 mm) of flexible conduit for recessed and semirecessed lighting fixtures; for equipment subject to vibration, noise transmission, or movement; and for all motors. Use LFMC in wet or damp locations. Install separate ground conductor across flexible connections.
- Q. Surface Raceways: Install a separate, green, ground conductor in raceways from junction box supplying raceways to receptacle or fixture ground terminals.
- R. Set floor boxes level and flush with finished floor surface.
- S. Set floor boxes level. Trim after installation to fit flush with finished floor surface.
- T. Install hinged cover enclosures and cabinets plumb. Support at each corner.

3.3 LOCATING AND ROUTING CIRCUITRY

- A. All circuitry shall be run concealed except that it shall be run exposed:-
 - 1. Horizontally at the ceiling of permanently unfinished spaces which are not assigned to mechanical or electrical equipment.
 - 2. Horizontally and vertically in mechanical equipment spaces.
 - 3. Horizontally and vertically in electric equipment rooms.
 - 4. Where specifically noted on the drawings.
- B. Concealed circuitry shall be so located that building construction materials can be applied over its thickest elements without being subject to spalling or cracking.
- C. Embedment of Circuitry: Not Allowed.
- D. To the extent that circuitry cannot be embedded in concrete slabs and fill, floor and wall mounted outlets shall be supplied in conformance with so-called "poke through system" criteria as described below. Outlets supplied from a specialty cast-in-floor raceway system constitute an exception to this criteria.

3.4 INSTALLING JUNCTION, PULL AND OUTLET BOXES:

A. Apply junction and pull boxes in accordance with the following:-

1. Include pull boxes in long straight runs of raceway to assure that cables are not damaged when they are pulled in.
2. Include junction and pull boxes to assure a neat and workmanlike installation of raceways.
3. Include junction and pull boxes to fulfill requirements pertaining to the limitations to the number of bends permitted in raceway between cable access points, the accessibility of cable joints and splices, and the application of cable supports.
4. Where the wires and cables following the same routing are indicated as running through separate pull boxes, it shall be understood that a segregation of the wires and cables is required. Separately indicated pull boxes may be incorporated into single boxes on condition that segregation is maintained by barriers of the type hereinafter specified.
5. Include all required junction and pull boxes regardless of indications on the drawings (which, due to symbolic methods of notation, may omit to show some of them).
6. Provide suitable budging from stud to stud for outlet boxes mainlines between studs.

B. Apply outlet boxes in accordance with the following:-

1. Unless noted below or otherwise specifically indicated, include a separate outlet box for each individual wiring device, lighting fixture and signal or communication system outlet component. Outlet boxes supplied attached to lighting fixtures shall not be used as replacements for the boxes specified herein unless they are specifically rated to accept "through circuit" building wires.
2. A continuous row of fixtures of the end-to-end channel type, designed for "through wiring," and wired in accordance with the specifications hereinafter pertaining to circuitry through a series of lighting fixtures, may be supplied through a single outlet box.
3. A series of separate fixtures, designed for "through wiring," spaced not more than 2 feet apart, and interconnected with conduit or raceway and circuitry which is in accordance with the specifications hereinafter pertaining to circuitry through a series of lighting fixtures, may be supplied through a single outlet box.
4. Connection to recessed ceiling fixtures supplied with pigtails may be arranged so that more than one, but not more than four, such fixtures are connected into a single outlet box. When adopting this procedure:-
 - a. Utilize an outlet box no smaller than 4-11/16" square by 2-1/8" deep.
 - b. Allow no fixture to be supplied from an outlet box in another room.
5. Multiple local switches indicated at a single location shall be gang mounted in a single outlet box, furnish barrier between different voltages.

6. All boxes shall be supported stud to stud with an appropriate box mounting bracket – Cuddy “RBS” server.
 7. Include all required outlet boxes regardless of indications on the drawings (which due to symbolic methods of notation, may omit to show some of them).
 8. Regardless of any indications on the drawings, flush wall mounted outlet boxes shall not be set back-to-back in fire rated walls or partitions, even if they are displaced vertically. Such outlets shall be offset horizontally by 2'-0" or as otherwise required to maintain the fire rating.
 9. Flush wall mounted outlet boxes in non-fire rated construction shall not be set back-to-back, but shall be offset at least 12" horizontally regardless of any indication on the drawings.
 10. Exclude "through-the-wall" collar type outlet boxes for flush devices indicated back-to-back in non-fire rated partitions or walls. Where necessary to accommodate box depths, outlets shown back-to-back shall be horizontally offset.
- C. Install junction boxes, pull boxes and outlet boxes in accordance with the following:-
1. Exclude surface mounted outlet boxes in conjunction with concealed circuitry.
 2. Exclude unused circuitry openings in junction and pull boxes. In larger boxes each such opening shall be closed with a galvanized sheet steel plate fastened with a continuous weld all around. In small outlet type boxes, utilize plugs as specified for such boxes.
 3. Close up all unused circuitry openings in outlet boxes. Unused openings in cast boxes shall be closed with approved cast metal threaded plugs. Unused openings in sheet metal boxes shall be closed with sheet metal knock-out plugs.
 4. Pack "through the wall" collar type outlet boxes with a sound deadening, non-hardening, non-hygroscopic, non-combustible, high dielectric stuffing material manufactured specifically for the purpose.
 5. Equip outlet boxes used in circuitry operating in the range of 250 to 300 volts to neutral with barriers to separate wiring devices connected to different phase legs.
 6. Outlet boxes for switches shall be located at the strike side of doors. Indicated door swings are subject to field change. Outlet boxes shall be located on the basis of final door swing arrangements.
 7. Boxes and plaster covers for duplex receptacles shall be arranged for horizontal mounting of the receptacle.
 8. Equip outlet boxes used for devices which are connected to wires of systems supplied by more than one set of voltage characteristics with barriers to separate the different systems.
- D. Barriers in junction and pull boxes which are larger than outlet size shall be of polyester resin fiberglass of adequate thickness for mechanical strength but in no case less than 1/4 inch. Each barrier shall be mounted, without fastenings, between angle iron guides so that they may be readily removed.

3.5 MOUNTING HEIGHTS

- A. Heights of all wall mounted outlets and equipment shall be in accordance with the following list. (Dimensions are above finished floor unless noted.)
 - 1. Receptacle or telephone outlet in field constructed wall, partition or column unless otherwise specified below -- 18" to centerline.
 - 2. Toggle switch outlet in field constructed wall partition or column -- 3'-10" to centerline.
 - 3. Bracket lighting outlets, except for "over door" -- 7'-6" to centerline.
 - 4. Bracket lighting outlet over door -- as required to center outlet between top surface of door lintel and underside of ceiling.
- B. Architectural drawings and field instructions issued by the Commissioner take precedence over the above list and shall be adhered to.

3.6 PROTECTION

- A. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, to ensure that coatings, finishes, and cabinets are without damage or deterioration at Substantial Completion.
 - 1. Repair damage to galvanized finishes with zinc-rich paint recommended by manufacturer.
 - 2. Repair damage to PVC or paint finishes with matching touch-up coating recommended by the manufacturer.

3.7 CLEANING

- A. After completing installation of exposed, factory-finished raceways and boxes, inspect exposed finishes and repair damaged finishes.

END OF SECTION

SECTION 260553

IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 -GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes electrical identification materials and devices required to comply with ANSI C2, current NYC Electrical Code, OSHA standards, and authorities having jurisdiction.

1.3 SUBMITTALS

- A. Product Data: For each electrical identification product indicated.
- B. Schedule of Nomenclature: An index of electrical equipment and system components used in identification signs and labels.

1.4 QUALITY ASSURANCE

- A. Comply with current NYC Electrical Code.
- B. Comply with ANSI A13.1 and NFPA 70 for color-coding.

PART 2 - PRODUCTS

2.1 RACEWAY AND CABLE LABELS

- A. Comply with ANSI A13.1, Table 3, for minimum size of letters for legend and for minimum length of color field for each raceway and cable size.
 - 1. Color: Black letters on orange field.
 - 2. Legend: Indicates voltage and service.
- B. Adhesive Labels: Preprinted, flexible, self-adhesive vinyl with legend over laminated with a clear, weather- and chemical-resistant coating.
- C. Pre-tensioned, Wraparound Plastic Sleeves: Flexible, preprinted, color-coded, acrylic band sized to suit the diameter of the line it identifies and arranged to stay in place by pre-tensioned gripping action when placed in position.

- D. Colored Adhesive Tape: Self-adhesive vinyl tape not less than 3 mils thick by 1 to 2 inches wide.
- E. Tape Markers: Vinyl or vinyl-cloth, self-adhesive, wraparound type with preprinted numbers and letters.
- F. Aluminum, Wraparound Marker Bands: Bands cut from 0.014-inch- thick aluminum sheet, with stamped or embossed legend, and fitted with slots or ears for permanently securing around wire or cable jacket or around groups of conductors.
- G. Plasticized Card-Stock Tags: Vinyl cloth with preprinted and field-printed legends. Orange background, unless otherwise indicated, with eyelet for fastener.
- H. Aluminum-Faced, Card-Stock Tags: Weather-resistant, 18-point minimum card stock faced on both sides with embossable aluminum sheet, 0.002 inch thick, laminated with moisture-resistant acrylic adhesive, punched for fasteners, and preprinted with legends to suit each application.
- I. Brass or Aluminum Tags: 2 by 2 by 0.05-inch metal tags with stamped legend, punched for fastener.

2.2 NAMEPLATES AND SIGNS

- A. Safety Signs: Comply with 29 CFR, Chapter XVII, Part 1910.145.
- B. Engraved Plastic Nameplates and Signs: Engraving stock, melamine plastic laminate, minimum 1/16 inch thick for signs up to 20 sq. in and 1/8 inch thick for larger sizes.
 - 1. Engraved legend with black letters on white face.
 - 2. Punched or drilled for mechanical fasteners.
- C. Baked-Enamel Signs for Interior Use: Preprinted aluminum signs, punched or drilled for fasteners, with colors, legend, and size required for the application. 1/4-inch (6.4-mm)) grommets in corners for mounting.
- D. Exterior, Metal-Backed, Butyrate Signs: Weather-resistant, nonfading, preprinted, cellulose-acetate butyrate signs with 0.0396-inch ((1-mm)) galvanized-steel backing; and with colors, legend, and size required for the application. 1/4-inch ((6.4-mm)) grommets in corners for mounting.
- E. Fasteners for Nameplates and Signs: Self-tapping, stainless-steel screws or No. 10/32, stainless-steel machine screws with nuts and flat and lock washers.

2.3 MISCELLANEOUS IDENTIFICATION PRODUCTS

- A. Cable Ties: Fungus-inert, self-extinguishing, one-piece, self-locking, Type 6/6 nylon cable ties.
 - 1. Minimum Width: 3/16 inch.

2. 2. Tensile Strength: 50 lb minimum.
 3. Temperature Range: Minus 40 to plus 185 deg F.
 4. 4. Color: According to color-coding.
- B. Paint: Formulated for the type of surface and intended use.
1. Primer for Galvanized Metal: Single-component acrylic vehicle formulated for galvanized surfaces.
 2. Primer for Concrete Masonry Units: Heavy-duty-resin block filler.
 3. Primer for Concrete: Clear, alkali-resistant, binder-type sealer.
 4. Enamel: Silicone-alkyd or alkyd urethane as recommended by primer manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Identification Materials and Devices: Install at locations for most convenient viewing without interference with operation and maintenance of equipment.
- B. Lettering, Colors, and Graphics: Coordinate names, abbreviations, colors, and other designations with corresponding designations in the Contract Documents or with those required by codes and standards. Use consistent designations throughout Project.
- C. Sequence of Work: If identification is applied to surfaces that require finish, install identification after completing finish work.
- D. Self-Adhesive Identification Products: Clean surfaces before applying.
- E. Install painted identification according to manufacturer's written instructions and as follows:
1. Clean surfaces of dust, loose material, and oily films before painting.
 2. Prime surfaces using type of primer specified for surface.
- F. Color Banding Raceways and Exposed Cables: Band exposed and accessible raceways of the systems listed below:
1. Bands: Pretensioned, wraparound plastic sleeves; colored adhesive tape; or a combination of both. Make each color band 2 inches (51 mm)) wide, completely encircling conduit.
 2. Band Locations: At changes in direction, at penetrations of walls and floors, at 50-foot (15-m)) maximum intervals in straight runs, and at 25-foot (7.6-m)) maximum intervals in congested areas.
 3. Apply the following colors to the systems listed below:
 - a. Fire Alarm System: Red.
- G. Caution Labels for Indoor Boxes and Enclosures for Power and Lighting: Install pressure-sensitive, self-adhesive labels identifying system voltage with black letters on orange background. Install on exterior of door or cover.

- H. Secondary Service, Feeder, and Branch-Circuit Conductors: Color-code throughout the secondary electrical system.
1. Color-code 208/120-V system as follows:
 - a. Phase A: Black.
 - b. Phase B: Red.
 - c. Phase C: Blue.
 - d. Neutral: White.
 - e. Ground: Green.
 2. Color-code 460/265-V system as follows:
 - a. Phase A: Yellow.
 - b. Phase B: Brown.
 - c. Phase C: Orange.
 - d. Neutral: White with a colored stripe or gray.
 - e. Ground: Green.
 3. Factory apply color the entire length of conductors, except the following field-applied, color-coding methods may be used instead of factory-coded wire for sizes larger than No. 10 AWG:
 - a. Colored, pressure-sensitive plastic tape in half-lapped turns for a distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply last two turns of tape with no tension to prevent possible unwinding. Use 1-inch-wide tape in colors specified. Adjust tape bands to avoid obscuring cable identification markings.
 - b. Colored cable ties applied in groups of three ties of specified color to each wire at each terminal or splice point starting 3 inches from the terminal and spaced 3 inches apart. Apply with a special tool or pliers, tighten to a snug fit, and cut off excess length.
- I. Power Circuit Identification: Separately identify each power circuit, cable or feeder at each termination, and at each pull box, junction box, vault and manhole through which it passes.
1. Non-ferrous metallic tags or wrap-around bands for outdoor or underground use.
 2. Plasticized card stock tags or wrap-around labels for indoor use.
 3. Stamped or embossed letters (1/4" high) identifying feeder or circuit by number and origin.
- J. Apply warning, caution, and instruction signs as follows:
1. Warnings, Cautions, and Instructions: Install to ensure safe operation and maintenance of electrical systems and of items to which they connect. Install engraved plastic-laminated instruction signs with approved legend where instructions are needed for system or equipment operation. Install metal-backed butyrate signs for outdoor items.
 2. Emergency Operation: Install engraved laminated signs with white legend on red background with minimum 3/8-inch high lettering for

emergency instructions on power transfer, load shedding, and other emergency operations.

- K. Equipment Identification Labels: Engraved plastic laminate. Install on each unit of equipment, including central or master unit of each system. This includes power, lighting, communication, signal, and alarm systems, unless units are specified with their own self-explanatory identification. Unless otherwise indicated, provide a single line of text with ½-inch- high lettering on 1-1/2-inch- high label; where two lines of text are required, use labels 2 inches high. Use white lettering on black field. Apply labels for each unit of the following categories of equipment using mechanical fasteners, including, but not limited to the following:

1. Panelboards, electrical cabinets, and enclosures.
2. Access doors and panels for concealed electrical items.
3. Enclosed circuit breakers.
4. Dimmers.
5. Control devices.
6. Receptacles – Normal

END OF SECTION

THIS IS A BLANK PAGE

SECTION 260923

LIGHTING CONTROL DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. Division 26, Section 262726 "Wiring Devices" for wall-box dimmers and manual light switches.

1.2 SUMMARY

- A. This Section includes the following lighting control devices:
 - 1. Time switches.
 - 2. Photoelectric switches.
 - 3. Multipole contactors.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Field quality-control test reports.

1.4 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

1.5 COORDINATION

- A. Coordinate layout and installation of ceiling-mounted devices with other construction that penetrates ceilings or is supported by them, including light fixtures, HVAC equipment, fire-suppression system, and partition assemblies.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Lighting control devices have been specified on the drawings and in other Division 26 Sections. Where they introduce lists, the following requirements apply to product selection:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers specified.

2.2 GENERAL LIGHTING CONTROL DEVICE REQUIREMENTS

- A. Line-Voltage Surge Protection: An integral part of the devices for 120- and 277-V solid-state equipment. For devices without integral line-voltage surge protection, field-mounting surge protection shall comply with IEEE C62.41 and with UL 1449.

PART 3 - EXECUTION

3.1 SENSOR INSTALLATION

- A. Install and aim sensors in locations to achieve at least 90 percent coverage of areas indicated. Do not exceed coverage limits specified in manufacturer's written instructions.

3.2 WIRING INSTALLATION

- A. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points. Separate power-limited and nonpower-limited conductors according to conductor manufacturer's written instructions.
- B. Install field-mounting transient voltage suppressors for lighting control devices in Category A locations that do not have integral line-voltage surge protection.
- C. Size conductors according to lighting control device manufacturer's written instructions, unless otherwise indicated.
- D. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.
- E. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

3.3 IDENTIFICATION

- A. Identify components and power and control wiring according to Division 26, Section 260533 "Raceways and Boxes for Electrical Systems."
- B. Label time switches and contactors with a unique designation.

3.4 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:

1. After installing time switches and sensors, and after electrical circuitry has been energized, adjust and test for compliance with requirements.
- B. Operational Test: Verify actuation of each sensor and adjust time delays.
- C. Remove and replace lighting control devices where test results indicate that they do not comply with specified requirements.
- D. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.5 ADJUSTING

- A. Occupancy Adjustments: When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting sensors to suit actual occupied conditions. Provide up to two visits to site outside normal occupancy hours for this purpose.

END OF SECTION

THIS IS A BLANK PAGE

SECTION 262726

WIRING DEVICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.
- B. Division 26, Section 26 05 53 "Identification for Electrical Systems".

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Single and duplex receptacles, ground-fault circuit interrupters, integral surge suppression units, and isolated-ground receptacles.
 - 2. Single- and double-pole snap switches and dimmer switches.
 - 3. Device wall plates.

1.3 DEFINITIONS

- A. EMI: Electromagnetic interference.
- B. GFCI: Ground-fault circuit interrupter.
- C. PVC: Polyvinyl chloride.
- D. RFI: Radio-frequency interference.
- E. TVSS: Transient voltage surge suppressor.
- F. UTP: Unshielded twisted pair.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: List of legends and description of materials and process used for premarking wall plates.

1.5 QUALITY ASSURANCE

- A. Source Limitations: Obtain each type of wiring device through one source from a single manufacturer.
- B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

- C. Comply with current NYC Electrical Code.
- 1.6 COORDINATION
- A. Receptacles for City of New York-Furnished Equipment: Match plug configurations.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. Wiring Devices:
 - a. Hubbell Incorporated; Wiring Device-Kellems
 - b. Leviton
 - c. Pass and Seymoure

2.2 RECEPTACLES

- A. Straight-Blade-Type Receptacles: Comply with NEMA WD 1, and UL 498.
- B. Locking Receptacles: Heavy-Duty grade.
- C. Straight-Blade Receptacles: Specification grade in all areas.

Specification Grade-General Usage Hubbell # HBL5351 (Brown), #HBL5351W, #HBL5252W (White), 20A 125V Duplex Receptacle for all general areas.

- D. Color(s) as selected by Commissioner from manufacturer's full range.

2.3 SWITCHES

- A. Single- and Double-Pole Switches: Comply with DSCC W-C-896F and UL 20.
 - 1. Snap Switches: Heavy-Duty grade, quiet type.
 - a. Hubbell #HBL1221 20A 120/277V - Single Pole Switch. For all general areas, i.e., offices, corridors, lobbies, lounges, waiting rooms, labs, voice and data equipment rooms, machine rooms, etc.
 - b. Hubbell #HBL1223 20A 120/277V - 3-Way Switch. For all general care areas, i.e., offices, corridors, lobbies, lounges, waiting rooms, labs, voice and data equipment rooms, machine rooms, etc.
 - c. Hubbell #HBL1224 20A 120/277V - 4-Way Switch. For all general areas, i.e., offices, corridors, lobbies, lounges, waiting rooms, labs, voice and data equipment rooms, machine rooms, etc.
 - 2. Color(s) as selected by Commissioner from manufacturer's full range.

2.4 WALL PLATES

- A. Single and combination types to match corresponding wiring devices.
 - 1. Plate-Securing Screws: Metal with head color to match plate finish.
 - 2. Material for Unfinished Spaces: Galvanized steel smooth, high-impact thermoplastic.
 - 3. Material for Wet Locations: Cast aluminum with spring-loaded lift cover, and listed and labeled for use in "wet locations."
 - 4. Color(s) as selected by Commissioner from manufacturer's full range.

2.5 FINISHES

- A. Color:
 - 1. Wiring Devices Connected to Normal Power System: As selected by Commissioner, unless otherwise indicated or required by NFPA 70,99
 - 2. Wiring Devices Connected to Emergency Power System: Red.
- B. Color(s) as selected by Commissioner from manufacturer's full range.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install devices and assemblies level, plumb, and square with building lines.
- B. Install wall dimmers to achieve indicated rating after derating for ganging according to manufacturer's written instructions.
- C. Install unshared neutral conductors on line and load side of dimmers according to manufacturers' written instructions.
- D. Arrangement of Devices: Unless otherwise indicated, mount flush, with long dimension vertical, and with grounding terminal of receptacles on top. Group adjacent switches under single, multigang wall plates.
- E. Remove wall plates and protect devices and assemblies during painting.
- F. Adjust locations of floor service outlets and service poles to suit arrangement of partitions and furnishings.

3.2 IDENTIFICATION

- A. Comply with Division 260533 Section "Electrical Identification for Electrical System."
 - 1. Receptacles: Identify panel board and circuit number from which served. Use hot, stamped or engraved machine printing with black lettering on face of plate, and durable wire markers or tags inside outlet boxes.

3.3 CONNECTIONS

- A. Ground equipment according to Division 26 Section "Grounding and Bonding for Electrical Systems."
- B. Connect wiring according to Division 26 Section "Feeders and Branch Circuitry."
- C. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

3.4 FIELD QUALITY CONTROL

- A. Perform the following field tests and inspections and prepare test reports:
 - 1. After installing wiring devices and after electrical circuitry has been energized, test for proper polarity, ground continuity, and compliance with requirements.
 - 2. Test GFCI operation with both local and remote fault simulations according to manufacturer's written instructions.
- B. Remove malfunctioning units, replace with new units, and retest as specified above.

END OF SECTION

SECTION 265100

INTERIOR LIGHTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 RELATED WORK SPECIFIED ELSEWHERE

- A. Lighting Control Equipment
- B. Emergency Lighting
- C. Lighting Fixture Schedule as per lighting design documents

1.3 DEFINITIONS

- A. Fixture: The elements of a luminaire that are designed to distribute the light, and to position and protect the lamps.
- B. Luminaire: A complete lighting unit consisting of a lamp or lamps and ballasting (when applicable) together with the parts designed to distribute the light, to position and protect the lamps and to connect the lamps to the power supply.
- C. Lighting Unit: A fixture or an assembly of fixtures with a common support, including a pole or bracket plus mounting and support accessories.
- D. Average Life: The time after which 50 percent of the lamps fail and 50 percent of the lamps survive under normal conditions.

1.4 QUALITY ASSURANCE

- A. Fixture Materials: Provide fixture parts and components that are constructed of materials most appropriate to their use or function, and that are resistant to corrosion in a marine environment and mechanical stresses encountered in the normal application and function of the fixtures.
 - 1. Manufacturers: Provide fixtures from manufacturers making like products for not less than three years prior to bid.
- B. Electrical Component Standard: Provide components that comply with NFPA 70 and that are listed and labeled by UL.
- C. Listing and Labeling: Provide fixtures and accessory components specified in this Section that are listed and labeled for their indicated use and installation conditions on Project.

- D. Special Listing and Labeling: Provide fixtures for use in damp or wet locations, underwater, and recessed in combustible construction that are specifically listed and labeled for such use. Provide fixtures for use in hazardous (classified) locations that are listed and labeled for the specific hazard.
- E. The Terms "Listed" and "Labeled": As defined in the National Electrical Code, Article 100.
- F. Listing and Labeling Agency Qualifications: A "Nationally Recognized Testing Laboratory" (NRTL) as defined in OSHA Regulation 1910.7.
- G. Applicable Codes: Fixtures shall be made and installed in accordance with the current version of the National Electric Code, the Uniform Building Code, the Federal Occupational Safety & Health Act, local codes, and other applicable regulations.
- H. Measuring and Testing Equipment: Instruments for the measurement of voltage, luminaire temperature, lighting level and fixture brightness level shall be available at all times on the site.

1.5 SUBMITTALS

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 1 Specification Sections, unless noted otherwise.
- B. Product Data: Fixtures, lamps, ballasts and poles or other mounting components. Arrange Product Data for fixtures in order of fixture designation. Include data on features and accessories and the following:
 - 1. Outline drawings indicating dimensions and principal features of fixtures.
 - 2. Electrical Ratings and Photometric Data: Certified results of independent laboratory tests for fixtures and lamps. Provide data for the specified lamp or lamp/ballast combination.
 - 3. Provide data as required to demonstrate that the submitted product meets or exceeds the performance of the specified fixture.
 - 4. Include photometric data charts: C.U., candlepower distribution and/or luminance information as necessary.
 - 5. Where technical charts alone cannot substantiate compliance, the submitting manufacturer may be required to provide a full photometric study of a specific project application for verification.
 - 6. Lamp Data: Manufacturer, ordering code and technical information.
 - 7. Ballast Data: Manufacturer, ordering code and technical data showing compliance with requirements.
 - 8. Where a fixture manufacturer will utilize ballasts from multiple manufacturers depending on availability, technical data must indicate the minimum characteristics that will be met in all cases.
- C. Scaled shop drawings detailing nonstandard fixtures and indicating dimensions, weights, method of field assembly, components, features, and accessories. Details shall be scaled at not less than half full size.

1. Scaled shop drawings of continuous run fixtures shall indicate overall length of each run, lamp combinations used to achieve the length and any accessory components required.
- D. Wiring diagrams detailing wiring for control system showing both factory-installed and field-installed wiring for specific system of this Project, and differentiating between factory-installed and field-installed wiring.
- E. Coordination Drawings showing fixtures mounted on, in, or above ceiling. Indicate coordination with ceiling grids and other equipment installed in vicinity.
- F. Product certificates signed by manufacturers of lighting fixtures certifying that their products comply with specified requirements.
- G. Field test reports indicating and interpreting test results specified in Part 3 of this Section.
- H. Maintenance data for fixtures to include in the operation and maintenance manual specified in Division 1.

1.6 WARRANTY

- A. General Warranty: The special warranty specified in this Article shall be in addition to, and run concurrent with, other warranties made under requirements of the Contract Documents.
- B. Special Warranty: Submit a written warranty signed by manufacturer and Installer agreeing to replace external parts of lighting fixtures exhibiting a failure of finish as specified below. This warranty is in addition to, and not a limitation of, other rights and remedies specified elsewhere within the Contract Documents.
- C. Protection of Metal from Corrosion: Warranty against perforation or erosion of finish due to weathering.
- D. Color Retention: Warranty against fading, staining, and chalking due to effects of weather and solar radiation.
- E. Special Warranty Period: 5 years from date of Substantial Completion.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Luminaires and lighting equipment shall be delivered to the project complete, including mounting devices, lamps and components necessary for the proper operation of the equipment.
- B. Marking: All equipment must be clearly and boldly identified as to the fixture type and, where practicable, the fixture location.
- C. Voltage identification: Fixtures designed for voltages other than 110-125 volt circuits shall be clearly marked.

- D. Lamp/ballast coordination: Fixtures equipped with ballasts for operation of rapid start lamps shall be plainly marked "Use Rapid Start Lamps Only". Similarly, fixtures equipped with ballasts or other components requiring use of specific types of lamps shall be plainly marked. Markings must be clear and shall be located to be readily visible to service personnel but invisible from normal viewing angles when lamps are in place.
- E. Timely Purchase: Luminaires, associated lamps and other allied equipment shall be ordered in a timely fashion and securely stored to be available to meet the project schedule.

1.8 EXTRA MATERIALS

- A. Furnish extra materials described below that match products installed, are packaged with protective covering for storage, and are identified with labels describing contents.
- B. Lamps: 10 lamps for every 100 of each type and rating installed. Furnish at least one of each type.
- C. Plastic Diffusers and Lenses: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
- D. Ballasts: 1 for every 100 of each type and rating installed. Furnish at least one of each type.
- E. Globes and Guards: 1 for every 20 of each type and rating installed. Furnish at least one of each type.
- F. Parabolic Louvers and Reflector Cones: 1 for every 100 of each type. Furnish at least one of each type.
- G. Custom Luminaires: When 10 identical custom fixtures are furnished, furnish one complete spare custom fixture as attic stock.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Available Products: Subject to compliance with the submittal requirements of this specification, fixtures that may be incorporated into the Work include, but are not limited to, the products specified in the Lighting Fixture Schedule. The photometric performance of all submitted products must meet or exceed the performance of the specified fixtures where proposed.

2.2 FIXTURES AND FIXTURE COMPONENTS, GENERAL

- A. Sheet Metal Components: Provide the required dimensional thickness of metal, plastic and composite materials so that all fixtures are rigid, stable and will resist deflection, twisting, warping under normal installation, and re-lamping procedures.

1. All luminaire housings shall be minimum 0.84mm cold rolled steel, unless a heavier gauge is specified or required by code.
 2. All aluminum extrusion housings shall be minimum 5mm thick.
 3. All spun, hydro-formed or sheet aluminum reflectors shall be fabricated from #12 aluminum sheets minimum, 1.45mm or heavier. Material shall be 3002 alloy, 99.5% pure aluminum with uniform grain structure.
 4. All spun aluminum housings shall be of an alloy of the 5000 series (ANSI/ASTM-B209-1977) or of an alloy that is found to have equal corrosion resistance.
- B. Joints: Provide positive, durable, means of connection at all joints as required. No hollow rivets, unless specifically approved.
- C. Gaskets: Provide neoprene, silicone, rubber, or other appropriate gaskets, stops, and barriers where required to prevent light leak, control sound and vibration, prevent water leaks and, if pertinent, water vapor penetration.
- D. Edges: Provide finished product with the following minimum qualities:
1. Ground and/or burr free metal edges.
 2. Tight fitting connections, hinges and closures.
 3. Clean neat corners, edges, trims and frames.
- E. Castings: All cast parts, including die-cast members, shall be of uniform quality; free from blow holes, pores, hard spots, shrinkage defects, cracks and or other imperfections that affect strength and appearance, or are indicative of inferior metals or alloys.
- F. Reflecting Surfaces: Minimum reflectance as follows, except as otherwise indicated:
1. White Surfaces: 85 percent.
 2. Specular Surfaces: 83 percent.
 3. Diffusing Specular Surfaces: 75 percent.
 4. Laminated Silver Metallic Film: 90 percent.
- G. Lenses, Diffusers, Covers, and Globes: 100 percent virgin acrylic plastic or water white, annealed crystal glass, except as otherwise indicated. Greenish-tinted lenses are not acceptable. Heat resistant where required: borosilicate or Pyrex glass.
1. Plastic: High resistance to yellowing and other changes due to aging, exposure to heat, and UV radiation.
 2. Lens Thickness: 0.125 inch (3 mm) minimum; except where greater thickness is indicated.
- H. Doors, Frames, and Other Internal Access: Smooth operating, free from light leakage under operating conditions, and arranged to permit relamping without use of tools. Arrange doors, frames, lenses, diffusers, and other pieces to prevent accidental falling during relamping and when secured in operating position.

- I. Fixture Support Components: Comply with Division 26 Section "Basic Electrical Materials and Methods."
 - 1. Rod Hangers: 3/16-inch minimum diameter, cadmium-plated, threaded steel rod.
 - 2. Hook Hanger: Integrated assembly matched to fixture and line voltage and equipped with threaded attachment, cord, and locking-type plug.

2.3 FINISHES

- A. Manufacturer's standard, except as otherwise indicated, applied over corrosion-resistant treatment or primer, free of streaks, runs, holidays, stains, blisters, and similar defects.
 - 1. Prior to finishing, all surfaces must be free from foreign materials such as dirt, rust, oil, polishing compounds and mold release agents.
 - 2. Where necessary, surface cleaned by accepted chemical means shall receive corrosion inhibiting phosphating treatment assuring positive paint adhesion.
 - 3. All castings and extrusions shall be machined, sanded or similarly treated, and given minimum one coat of baked-on clear methacrylate lacquer, unless a painted finish is specified.
 - 4. Aluminum surfaces exposed to weather (other than anodized reflectors covered elsewhere) receive a duronodic or polyester powder paint finish as specified for corrosion resistance.
 - 5. Sheet steel fixture housings, iron and steel parts, which have not received phosphating treatment ("Bonderizing" or similar process) or are to be utilized in exterior applications, are to be made corrosion resistant by zinc or cadmium plating or hot-dip galvanizing.
 - 6. Anodized aluminum reflectors required for exterior use shall have a minimum of 0.02mm anodizing thickness.

2.4 LAMPS

- A. Available Products: Lamps of the same type (such as fluorescent or HID) shall be supplied from the same manufacturer. Where a specific lamp manufacturer has been indicated in the Luminaire Schedule, lamps shall be supplied from the named manufacturer or approved equal. Provide fluorescent lamps from Osram Sylvania, General Electric, Philips Lighting or approved equal.
- B. Fluorescent Color Temperature and Minimum Color-Rendering Index (CRI): 3500 K and 85 CRI, except as otherwise indicated.
- C. Non compact Fluorescent Lamp Life: Rated average is 20,000 hours at 3 hours per start when used on rapid start circuits.

2.5 LAMP HOLDERS

- A. Fluorescent sockets: Fluorescent lamp sockets operating with an open circuit voltage in excess of 300 volts shall be of the safety type, that open the supply circuit when the lamp is removed from the sockets.

2.6 BALLASTS

- A. Fluorescent Ballasts: Electronic integrated circuit, solid-state, full-light-output, energy-efficient rapid start type, unless otherwise indicated; must be compatible with lamps and lamp combinations to which connected.
1. Underwriters Laboratories (UL) listed, Class P, Type 1.
 2. Certification by Certified Ballast Manufacturers Association (CBM).
 3. Ballast shall be rapid start, unless otherwise indicated. Ballast starting parameters shall be consistent with lamp manufacturers' recommendations and shall provide full rated lamp life under normal operating conditions.
 4. Ballast shall have audible noise rating of Class "A" except as otherwise indicated.
 5. Voltage: Match connected circuits.
 6. Lamp Flicker: Less than 5 percent.
 7. Minimum Power Factor: 95 percent.
 8. Total Harmonic Distortion (THD) of Ballast Current: 20 percent or less.
 9. Minimum Ballast Factor (relative light output): 88 percent for T8 lamps, 87 percent for T5 compact fluorescent, 97 percent for all T4 compact fluorescent, and 100 percent for linear T5.
 10. Multi lamp Ballasts: Use 2 lamp ballasts for multi lamp fixtures where possible. Supply 3 or 4 lamp ballasts only if the ballasts comply with the other requirements of this specification.
 11. Lamp-ballast connection method shall not reduce normal rated life of lamps.
 12. Ballast shall comply with all applicable local, state, and federal efficiency standards.
 13. For lamps smaller than one inch in diameter (all T2, T4 and T5 lamps) ballasts shall be equipped with a cut-off circuit that senses an over-voltage condition to the lamp for end-of-life protection.
 14. Low-Temperature Fluorescent Ballasts: Comply with above requirements, except ballast may be Class P electromagnetic type. Starting temperature shall be minus 20 deg. F or colder, or the minimum available depending on lamp type.
 15. Dimming Ballasts: Electronic rapid start type providing smooth dimming over a minimum range from 100 to 1 percent light output (unless otherwise specified). Listed for use with specific fluorescent dimming system provided.
 16. Remote Ballasts: Where ballasts must be mounted remotely from fixtures, provide locations that fall within the manufacturers recommended distance limitations.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Set units plumb, square, and level with ceiling and walls, and secure according to manufacturer's written instructions and approved Shop Drawings. Support fixtures according to requirements of Division 26 Section "Feeders and Branch Circuitry."

- B. Support for Recessed and Semi recessed Grid-Type Fluorescent Fixtures: Units may be supported from suspended ceiling support system, unless prohibited by local codes. No movement permitted after installation. Install ceiling support system rods or wires at a minimum of 4 rods or wires for each fixture, located not more than 6 inches from fixture corners.
1. Install support clips for recessed fixtures, securely fastened to ceiling grid members, at or near each fixture corner.
 2. Fixtures Smaller than Ceiling Grid: For fixtures that normally mount at the ceiling grid on at least one side, install a minimum of 4 rods or wires for each fixture and locate at corner of ceiling grid where fixture is located. Provide additional ceiling grid to frame out fixture. Do not support fixtures by ceiling acoustical panels.
 3. Fixtures of Sizes Less than Ceiling Grid: Center in acoustical panel. Support fixtures independently with at least two 3/4-inch (20-mm) metal channels spanning and secured to ceiling tees.
- C. Support for Suspended Fixtures: Brace pendants and rods over 48 inches to limit swinging. Support stem-mounted, single-unit, suspended fluorescent fixtures with twin-stem hangers. For continuous rows, use tubing or stem for wiring at one point and tubing or rod or cable for suspension for each unit length of chassis, including one at each end.
1. Provide all mounting components required for installation, including hickies, stud-extensions, ball-aligners, canopies and stems.
 2. Provide stems on pendant fixtures of the correct length to uniformly maintain the fixture heights shown on the drawings or established in the field.

3.2 WIRING

- A. Minimum standards: All wiring shall comply with the following standards:
1. All wiring within lighting fixtures or from the splice with the building wiring shall be as specified under Division 26 Section "Feeders and Branch Circuitry".
 2. Wiring between fluorescent lamp holders and associated operating and starting equipment shall be of similar or heavier gauge than the leads furnished with the approved ballasts.
 3. Wire leads to the receptacle or connector of any side prong incandescent lamp or any "cool-beam" lamp, or any lamp 200 watts or over shall be SF-2 (silicone rubber insulated) stranded wire.
 4. Wiring within fixture construction is to be concealed, except where the fixture design or mounting dictates otherwise.
 5. Joints in wiring within lighting fixtures and connections of the fixture wiring to the wiring of the building shall be as specified under Division 26 Section "Feeders and Branch Circuitry" with special attention to paragraphs relating to high amperage, low voltage conditions.
 6. Wiring channels and wireways shall be free from projections and rough or sharp edges throughout, and at all points or edges over which conductors must pass and may be subject to injury or wear.

7. Insulated bushings shall be installed at points of entrance and exit of flexible wiring.

3.3 GROUNDING

- A. Ground fixtures and metal poles according to Division 26 Section "Grounding and Bonding for Electrical Systems". Tighten electrical connectors and terminals, including grounding connections, according to manufacturer's published torque-tightening values.
 1. Poles: Install 3-m driven ground rod at each pole.
 2. Nonmetallic Poles: Ground metallic components of lighting unit and foundations. Connect fixtures to grounding system with No. 6 AWG conductor.

3.4 FIELD QUALITY CONTROL

- A. Inspect each installed fixture for damage. Replace damaged fixtures and components.
- B. Give advance notice of dates and times for field tests.
- C. Provide instruments to make and record test results.
- D. Tests: Verify normal operation of each fixture after fixtures have been installed and circuits have been energized with normal power source.
- E. Replace or repair malfunctioning fixtures and components, then retest. Repeat procedure until all units operate properly.
- F. Report results of tests.
- G. Replace fixtures that show evidence of corrosion during Project warranty period.

3.5 CLEANING AND ADJUSTING

- A. Clean fixtures after installation: Remove all protective strippable coatings, dust, finger marks, paint spots and any materials deleterious to the appearance or functioning of the fixtures. Use methods and materials recommended by manufacturer. Abrasive cleaners are not permitted.

3.6 FINAL INSPECTION

- A. Upon completion of the installation, lighting equipment must be in first class operating order and free from defects in condition and finish.
 1. At time of final inspection, all fixtures and equipment must be installed and lamped with new lamps and be complete with all lenses, diffusers, reflectors, side panels, louvers or other necessary components. Lamps that have been operating longer than the following time limits or that have already burned out must be replaced with new lamps prior to final completion.

- a. Fluorescent lamps: 1000 hours (approximately 125 eight-hour days).
2. Fixtures shall be completely clean and free from finger marks, dust, plaster or paint spots.
3. Any reflectors, lenses, diffusers, side panels or other parts damaged prior to the final inspection shall be replaced.
4. Exterior poles, bollards, bases and other exterior fixtures shall be painted to match factory color where finish has been scratched or damaged.
5. Housings shall be rigidly installed and adjusted to a neat flush fit with the ceiling.
6. No light leaks shall be permitted at the ceiling line or from any visible part or joint.

END OF SECTION

THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 6, 2014

ADDENDUM No. # 1

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

PV467-STG

St. George Theater Stage Rigging Replacement

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. **Revisions to the Addendum to the General Conditions:**
See Attachment A.
2. **Revisions to the Specifications:**
See Attachment B.

THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.


If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.



David Resnick, R.A.
Deputy Commissioner

CASTLESTONE CONST. CORP.
Name of Bidder

By: Abdul L. Muhammad



THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 16, 2014

ADDENDUM No. # 2

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

PV467-STG

St. George Theater Stage Rigging Replacement

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. Revisions to the Bid Booklet

Delete Attachment 1 – Bid Information, page 24 of the Bid Booklet and replace with page 24-R, included with this Addendum.

PLEASE NOTE PRE-BID CONFERENCE DATE IS REVISED TO JUNE 18, 2014

THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.

If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.




David Resnick, R.A.
Deputy Commissioner

CASTLESTONE CONST. CORP.

Name of Bidder

By: *Richard L. Mervin*



THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS

June 25, 2014

ADDENDUM No. # 3

FOR FURNISHING ALL LABOR AND MATERIAL NECESSARY AND REQUIRED FOR:

PV467-STG

St. George Theater Stage Rigging Replacement

This addendum is issued for the purpose of amending the requirements of the Bid and Contract Documents and is hereby made a part of said Bid and Contract Documents to the same extent as though it were originally included therein.

The bidder is advised that the items listed below apply to the project:

1. The Bid Opening for the contract described below scheduled for July 2, 2014, at 2:00 pm is rescheduled to July 9, 2014, at 2:00 pm.
Contract #1 – General Construction Work
2. Bidders Questions and Responses to Questions:
See Attachment A
3. Revisions to the Bid Booklet
See Attachment B
4. Revisions to the Volume 2
See Attachment C
5. Revisions to the Specifications
See Attachment D

THIS ADDENDUM MUST BE SIGNED BY ALL BIDDERS AND ATTACHED TO THEIR BIDS.


If additional information is required, please contact the Department of Design and Construction, Contract Section at (718) 391-2200, (718) 391-1283, or by fax at (718) 391-2615.


David Resnick, R.A. For DC
Deputy Commissioner

CASTLESTONE CONST. CORP.

Name of Bidder

By: Ahmed L. Merwan





FMS ID: PV467-STG



**THE CITY OF NEW YORK
DEPARTMENT OF DESIGN AND CONSTRUCTION
DIVISION OF PUBLIC BUILDINGS**

30-30 THOMSON AVENUE LONG ISLAND CITY, NEW YORK 11101-3045
TELEPHONE (718) 391-1000 WEBSITE www.nyc.gov/buildnyc

Contract for Furnishing all Labor and Material Necessary and Required for:

CONTRACT NO. 1 GENERAL CONSTRUCTION

St. George Theater Stage Rigging Replacement

LOCATION: 35 Hyatt Street
BOROUGH: Staten Island 10301
CITY OF NEW YORK

Contractor _____

Dated _____, 20____

Entered in the Comptroller's Office

First Assistant Bookkeeper _____

Dated _____, 20____

